

APPLICANT: AZDEN CORPORATION

FCC ID: BZB51BT

TABLE OF CONTENTS LIST

TEST REPORT CONTAINING:

PAGE 1GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2TECHNICAL DESCRIPTION CONT. & RF OUTPUT
PAGE 3AUDIO FREQUENCY RESPONSE GRAPH MODULATION LIMITING - 300 Hz
PAGE 4MODULATION LIMITING PLOT - 2500 MODULATION LIMITING PLOT - 15000
PAGE 5AUDIO LOW PASS FILTER OCCUPIED BANDWIDTH
PAGE 6SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) RADIATED EMISSIONS TEST DATA & TEST PROCEDURE
PAGE 7METHOD OF MEASURING RADIATED EMISSIONS
PAGE 8FREQUENCY STABILITY TEST DATA
PAGE 9-12EQUIPMENT LIST

EXHIBITS CONTAINING:

EXHIBIT 1LABEL SAMPLE
EXHIBIT 2LABEL LOCATION
EXHIBIT 2BLOCK DIAGRAM
EXHIBIT 3SCHEMATIC
EXHIBIT 4PARTS LIST
EXHIBIT 5USES MANUAL
EXHIBIT 6EXTERNAL PHOTOGRAPHS
EXHIBIT 7INTERNAL PHOTOGRAPHS
EXHIBIT 8OPERATIONAL DESCRIPTION
EXHIBIT 9TUNING PROCEDURE
EXHIBIT 10TEST SET UP PHOTOGRAPH

APPLICANT: AZDEN CORPORATION

FCCID: BZB51BT

REPORT #: A\AZDEN\614AUT3\614AUT3TestReport.doc

Page #: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

- 2.1033(c)(1) AZDEN CORPORATION will manufacture the 51BT in
2.1033(c)(2) quantity, for use under FCC RULES PART 74.801, LOW
POWER AUXILIARY STATIONS.

AZDEN CORPORATION
1-12-17 Kami-Renjaku
Mitaka, Japan

2.1033 TECHNICAL DESCRIPTION

- (c)(3) Instruction book. The instruction manual is included as Exhibit 5.

- (c)(4) Type of Emission: 30K0F3E

Bn = 2M + 2DK

M = 4000

D = 11kHz(Peak Deviation)

K = 1

Bn = 2(4k) + 2(11k)(1) = 30k

ALLOWED AUTHORIZED BANDWIDTH = 200kHz.
74.861(e)(5)

- (c)(5) Frequency Range: Part 74: 793-806 MHz
TEST FREQ = 799.40 MHz.

- (c)(6) Power Range and Controls:UNIT has no controls.

- (c)(7) Maximum Output Power Rating: .017 Watts into 50
ohms resistive load.

- (c)(8) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

9.0V BATTERY

Vce = 9.0 Volts


Ice = 28 mA.

- (c)(9) Tune-up procedure. The tune-up procedure is given
in EXHIBIT 9.

- (c)(10) Complete Circuit Diagrams: The circuit diagram is
included as EXHIBIT # 4. The block diagram
is included as EXHIBIT #3.

- 2.1033(c)11) Photo or Drawing of Label and sketch of location:
See EXHIBIT # 1-2.
- 2.1033(c)12) Photos of Equipment:
See EXHIBIT #'S 6-7.
- (c)(13) Description of all circuitry and devices provided for determining and stabilizing frequency.
- Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.
- This circuitry is described on EXHIBIT 8.
- Limiting Modulation:
The transmitter audio circuitry is contained in IC101, IC102 and IC103.
- Limiting Power:
There is no provision for limiting power.
- (13) Digital modulation. This unit does not use digital modulation.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.
- 2.1046 RF power output.
- RF power measured is:
OUTPUT POWER: .017 WATTS


R.F. POWER OUTPUT TEST PROCEDURE

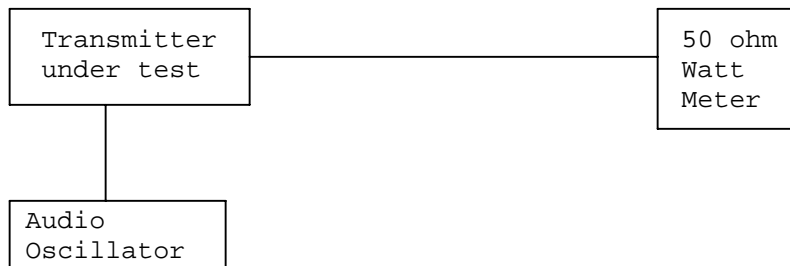


2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE


The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown below.

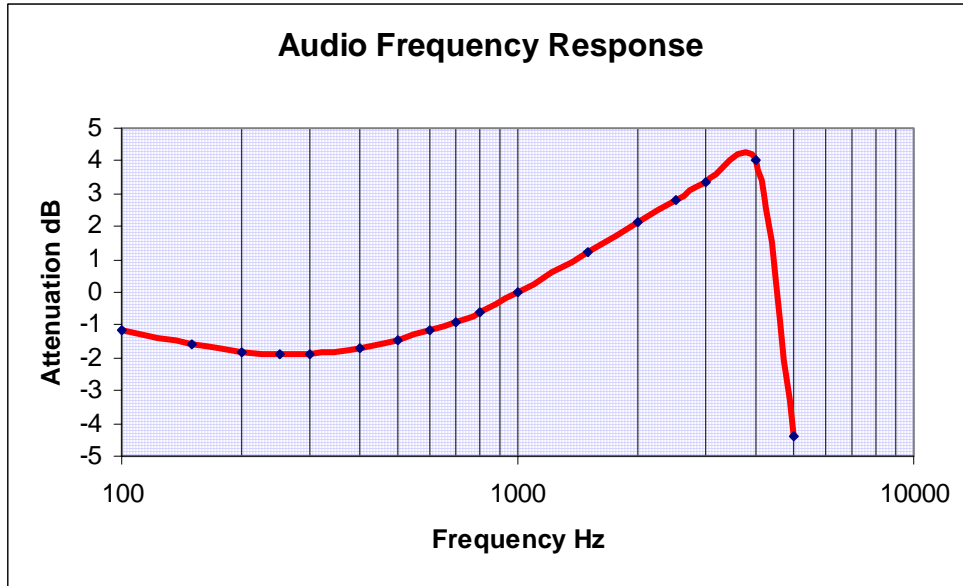


MODULATION LIMITING - 300 Hz

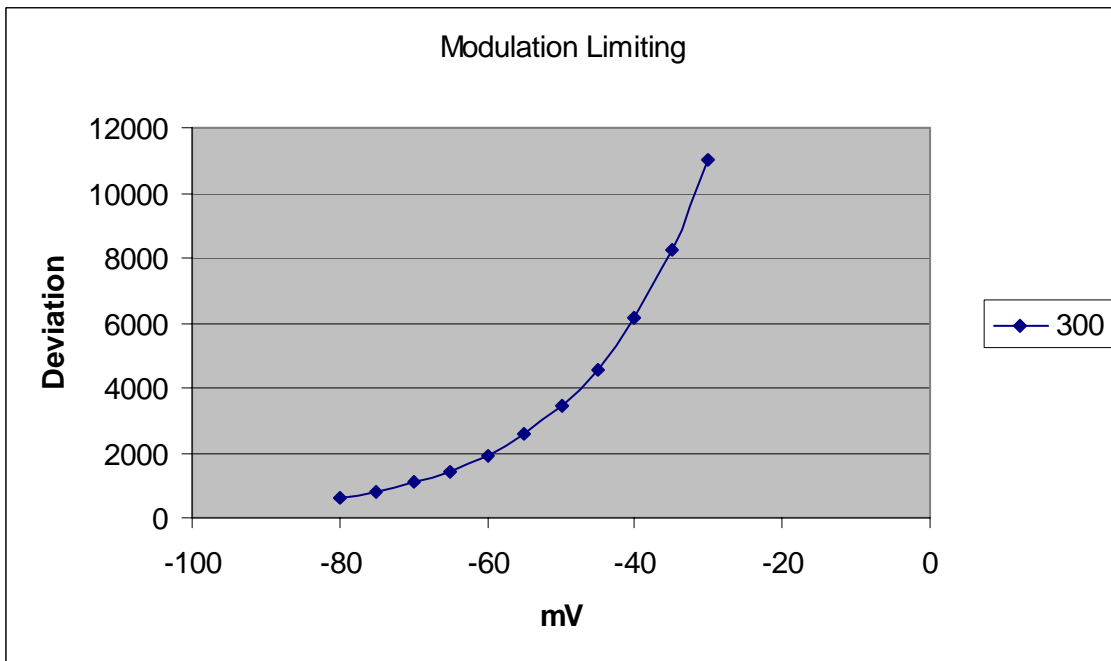

MODULATION LIMITING - 2.5 k

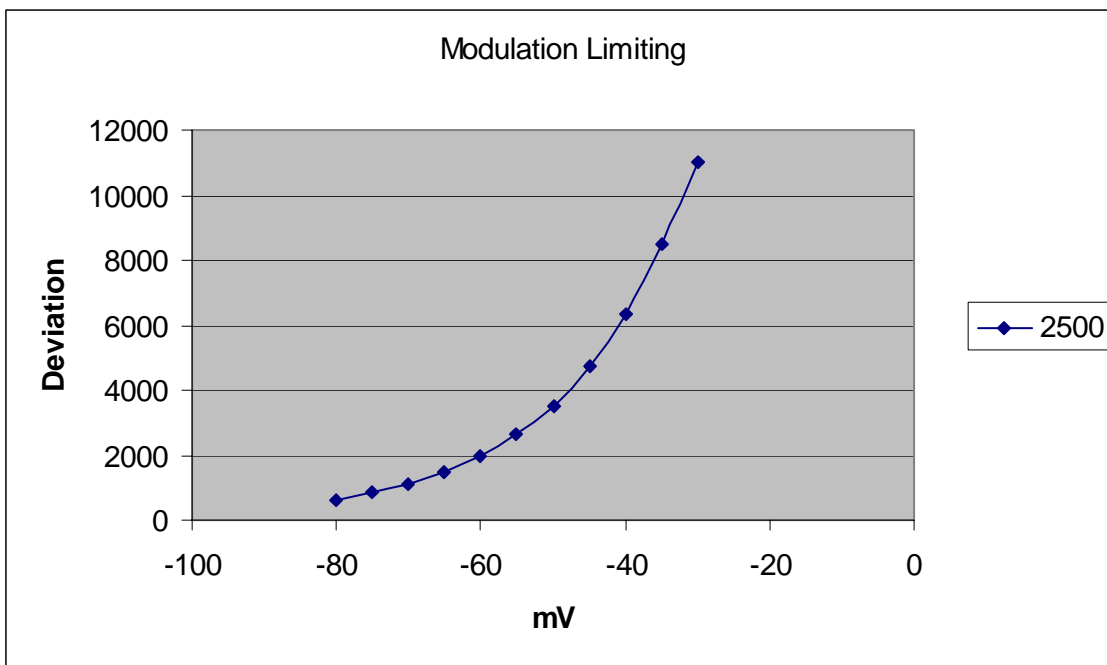

MODULATION LIMITING - 15 k

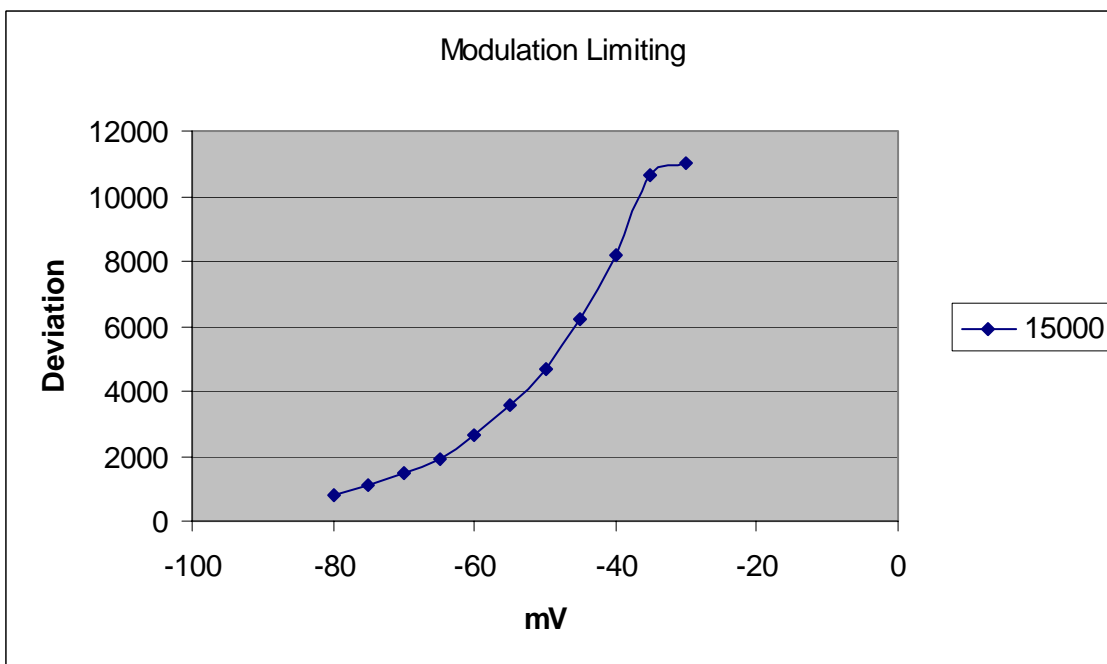

AUDIO LOW PASS FILTER

The audio low pass filter is not required in this unit.


2.1049(c) **Occupied Bandwidth:**

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% $43 \log(P_o)$ dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Wireless Microphone transmitter:


Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

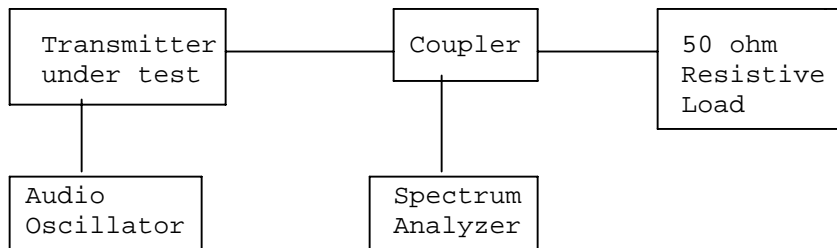

REQUIREMENT: PART 74: 200kHz EMISSION BANDWIDTH.

OCCUPIED BANDWIDTH

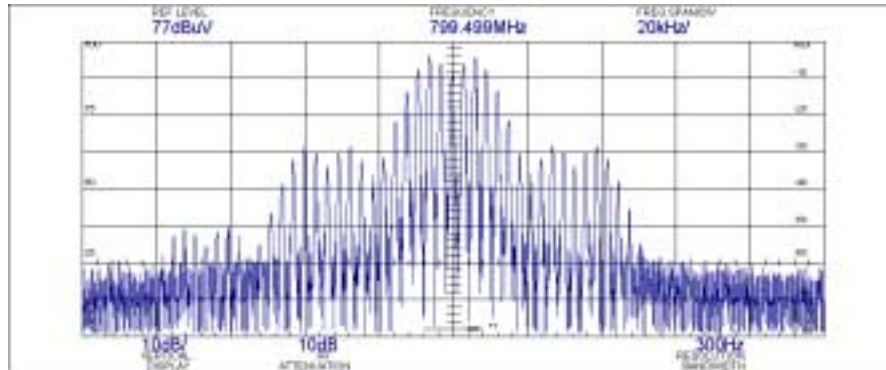

2.1051 Spurious emissions at antenna terminals(conducted):
Not Applicable no antenna connector.

2.1053(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be 43 +10log(Po) dB below the
mean power output of the transmitter.

$$43 + 10 \log(0.017) = 25.30 \text{ dB}$$

TEST DATA:

Emission Frequency (MHz)	Polarity Ant.	Corrected EUT Signal Reading (dBm)	Coax Loss	Sub. Ant.	DB Below Carrier (dBc)
799.4	H	12.4	0	0	0
1,598.90	V	-22.4	1.1	4.99	30.91
2,398.40	V	-28.1	1.2	5.24	36.46
3,197.90	H	-22.9	1.35	7.02	29.63
3,997.40	H	-39.1	1.4	7.5	45.4
4,796.80	H	-37.4	1.5	8.29	43.01
5,596.30	H	-38.4	1.7	8.61	43.89
6,395.80	H	-33.5	1.9	9.12	38.68
7,195.30	H	-43.9	2	7.87	50.43
7,994.80	V	-44.2	2	8.98	49.62

METHOD OF MEASUREMENT: The procedure used was TIA/EIA STANDARD 603.
The spectrum was scanned from 30 to at least the tenth harmonic of the
fundamental using a HP model 8566B spectrum analyzer and an appro-
priate antenna. Measurements were made at the open field test site of
TIMCO ENGINEERING INC. located at 849 NW SR 45 Newberry, Florida
32669.


APPLICANT: AZDEN CORPORATION

FCCID: BZB51BT

REPORT #: A\AZDEN\614AUT3\614AUT3TestReport.doc

Page #: 6 of 12

Method of Measuring Radiated Spurious Emissions

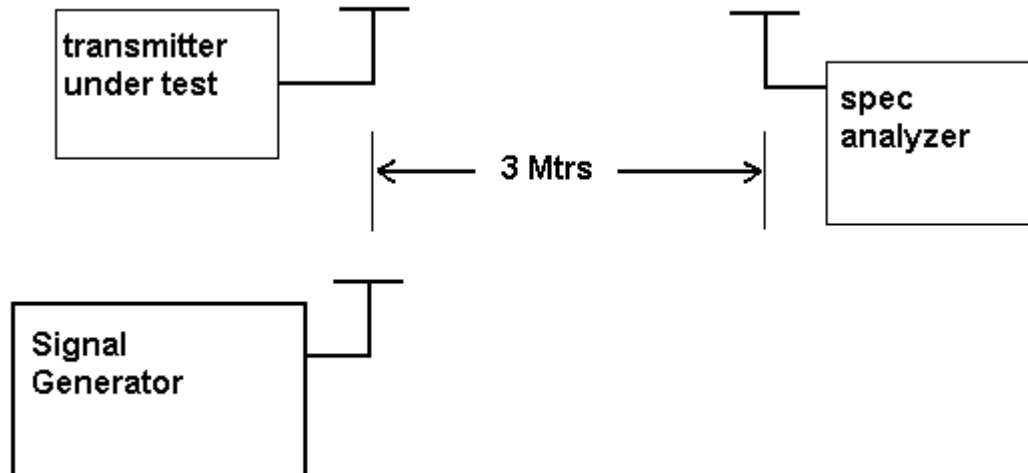

RF power is measured by the substitution method as outlined in TIA/EIA - 603. With a nominal battery voltage of 9.0V, and the transmitter properly adjusted, the RF output measures:

0.017 Watts ERP

2.1055 Frequency stability:
S74.861(e)(4)

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm)(74.861 e.4) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 805.875817

TEMPERATURE °C	FREQUENCY MHz	PPM
-30C	805.866793	-11.20
-20C	805.872384	-4.26
-10C	805.875706	-0.14
0C	805.877064	1.55
10C	805.876971	1.43
20C	805.875817	0.00
30C	805.874147	-2.07
40C	805.872678	-3.90
50C	805.871632	-5.19

25c END BATT. Volt(7.65)= 7.65VDC 805.875 818 + 0.00

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -11.20 to +1.55 ppm. The maximum frequency variation over the voltage range was +0.00 ppm.

EMC Equipment List

Last Update: 6/27/03

DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/13/06
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
Receiver, Beige Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
RF Preselector	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
Receiver, Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
RF Preselector	HP	85685A	2926A00983	CAL 4/15/03	4/15/05
Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Receiver, Silver/Grey Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/14/02	10/14/04
RF Preselector	HP	85685A	2620A00294	CAL 10/14/02	10/14/04
Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/14/02	10/14/04
Preamplifier	HP	8449B	3008A01075	CHAR 1/28/02	1/28/04
Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
BiconiLog Antenna	EMCO	3143	9409-1043		
Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CAL 3/4/03	3/4/05

APPLICANT: AZDEN CORPORATION

FCCID: BZB51BT

REPORT #: A\AZDEN\614AUT3\614AUT3TestReport.doc

Page #: 9 of 12

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CAL 9/26/02	9/26/05
	Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 2/17/03	2/17/05
	Horn Antenna *(at 3 meters)	Electro-Metrics	EM-6961	6246	CAL 3/31/03	3/31/05
	Horn Antenna *(at 10 meters)	Electro-Metrics	EM-6961	6246	CAL 6/4/03	6/4/05
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M08HW/A	F30425-1	CHAR 4/25/03	4/25/05
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M12HW/A	E30425-1	CHAR 4/25/03	4/25/05
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CHAR 12/12/01	12/12/03
	Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/03
	System One	Audio Precision	System One	SYS1-45868	CHAR 4/25/02	4/25/04
	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	79510405	CHAR 9/26/01	9/26/03

APPLICANT: AZDEN CORPORATION

FCCID: BZB51BT

REPORT #: A\AZDEN\614AUT3\614AUT3TestReport.doc

Page #: 10 of 12

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Peak Power Meter	HP	8900C	2131A00545	CHAR 1/26/01	1/26/03
	Power Meter	HP	432A	1141A07655	CAL 4/15/03	4/15/05
	Power Meter And Sensor	Bird	4421-107 4022	0166 0218	CAL 4/16/03	4/16/05
	Power Sensor	HP	478A	72129	CAL 4/15/03	4/15/05
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
	Thermometer	Extech	4028	14871-2	CAL 3/7/03	3/7/05
	Hygro-Thermometer	Extech	445703	0602	CAL 10/4/02	10/4/04
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
	Frequency Counter	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
	Power Sensor	Agilent Technologies	84811A	2551A02705	CHAR 1/26/01	1/26/03
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
	Signal Generator	HP	8640B	2308A21464	CAL 2/15/02	2/15/04
	Sweep Generator	Wiltron	6648	101009	CAL 4/15/03	4/15/05
	Sweep Generator	Wiltron	6669M	007005	CAL 3/3/03	3/3/05
	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
	Modulation Meter	Boonton	8220	10901AB	CAL 4/15/03	4/15/05
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 3/2/01	3/2/03
	Notch Filter	Lorch Microwave	5BRX-850/ X100-N	AD-1	CHAR 4/17/03	4/17/05
	High Pass Filter	Unk	3768(5)-400	041	CHAR 12/17/02	12/17/04

APPLICANT: AZDEN CORPORATION

FCCID: BZB51BT

REPORT #: A\AZDEN\614AUT3\614AUT3TestReport.doc

Page #: 11 of 12

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	High Pass Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/03
	High Pass Filter	Microlab	HA-20N		CHAR 2/7/03	2/7/05
	Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/03
	Audio Generator	B&K Precision	3010	8739686	CHAR 12/1/02	12/1/04
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CAL 3/7/03	3/7/05
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 8/31/01	8/31/03
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
	Measuring Tape, 7.5M	Kraftixx	7.5M PROF1		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

APPLICANT: AZDEN CORPORATION

FCCID: BZB51BT

REPORT #: A\AZDEN\614AUT3\614AUT3TestReport.doc

Page #: 12 of 12