



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 7**

**CERTIFICATION TEST REPORT**

**FOR**

**FLASH MP3 PLAYER**

**MODEL NUMBER: 1124 AND 1125**

**FCC ID: C3K-1125**

**IC ID: 3048A-1125**

**REPORT NUMBER: 07U11225-1B**

**ISSUE DATE: SEPTEMBER 25, 2007**

*PREPARED FOR*  
**MICROSOFT CORPORATION  
1065 LA AVENIDA  
MOUNTAIN VIEW, CA 94043, USA**

*PREPARED BY*  
**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	09/13/07	Initial Issue	Hsin Fu Shih
B	09/25/07	Corrected some typos and update setup digram	Hsin Fu Shih

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	6
5.4. <i>SOFTWARE AND FIRMWARE</i> .....	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	7
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>10</b>
7.1. <i>CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND</i> .....	10
7.1.1. 6 dB BANDWIDTH .....	10
7.1.2. 99% BANDWIDTH.....	15
7.1.3. PEAK OUTPUT POWER .....	20
7.1.4. AVERAGE POWER.....	26
7.1.5. PEAK POWER SPECTRAL DENSITY (FCC).....	27
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	32
7.2. <i>RADIATED EMISSIONS</i> .....	39
7.2.1. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND .....	40
7.2.2. RADIATED EMISSIONS BELOW 1 GHz .....	51
7.3. <i>POWERLINE CONDUCTED EMISSIONS</i> .....	57
7.4. <i>MAXIMUM PERMISSIBLE EXPOSURE</i> .....	67
<b>8. SETUP PHOTOS .....</b>	<b>71</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** MICROSOFT CORPORATION  
1065 LA AVENIDA  
MOUNTAIN VIEW, CA 94043, USA

**EUT DESCRIPTION:** FLASH MP3 PLAYER

**MODEL:** 1124 and 1125

**SERIAL NUMBER:** 0100265732

**DATE TESTED:** August 15 - September 7, 2007



APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED
IC RSS-210 ISSUE 7 ANNEX 8	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



HSIN FU SHIH  
ENGINEERING SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

DEVIN CHANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2 and RSS-210 Issue 7.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11b/g Flash MP3 player. Model # 1124 and 1125

Booth model are identical to each other except capacity of Memory, Model # 1124 with 4 GB memory, Model # 1125 with 8 GB Memory

Radio Module	Marvell 88W8686
Flash Memory	Hynix
LCD	Toshiba
Power Adapter#1	Phiphong / Model No:1128 ((PSM05A-050Q)
Power Adapter#2	Delta / Model No: 1128 ( DPSN-8CB A )

Model # 1125 was selected for final compliance tests.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	13.49	22.34
2412 - 2462	802.11g	11.39	13.77

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Helical antenna with a maximum gain of 1 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The client provided a program which enables a user to control the frequency and output power of the module with 60% duty cycle for b mode and 70% duty cycle for g mode.

## 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2462 MHz.

The worst-case data rate for this channel is determined to be 1 Mb/s, based on previous experience with Marvell WLAN product design architectures.

Thus all emissions tests were made in the 802.11b mode, 2462 MHz, 1 Mb/s.

The EUT is a portable device; therefore X, Y & Z positions have been investigated. The worst case is to evaluated at Y positions.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	FCC ID	Model	Serial Number
Laptop PC	HP	DOC	pavilion ze4101	CN24600055
AC/DC Adapter	HP	DOC	ADP-75HB	MVT0240165081
Headset	Microsoft	DOC	812950-001	N/A


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	USB	Unshielded	1.2 m	N/A
2	AC	1	AC	Unshielded	1.5 m	N/A
3	DC	1	DC	Unshielded	2.0 m	N/A

### TEST SETUP

The EUT is connected in a host laptop computer via an interface board adapter / extension board during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

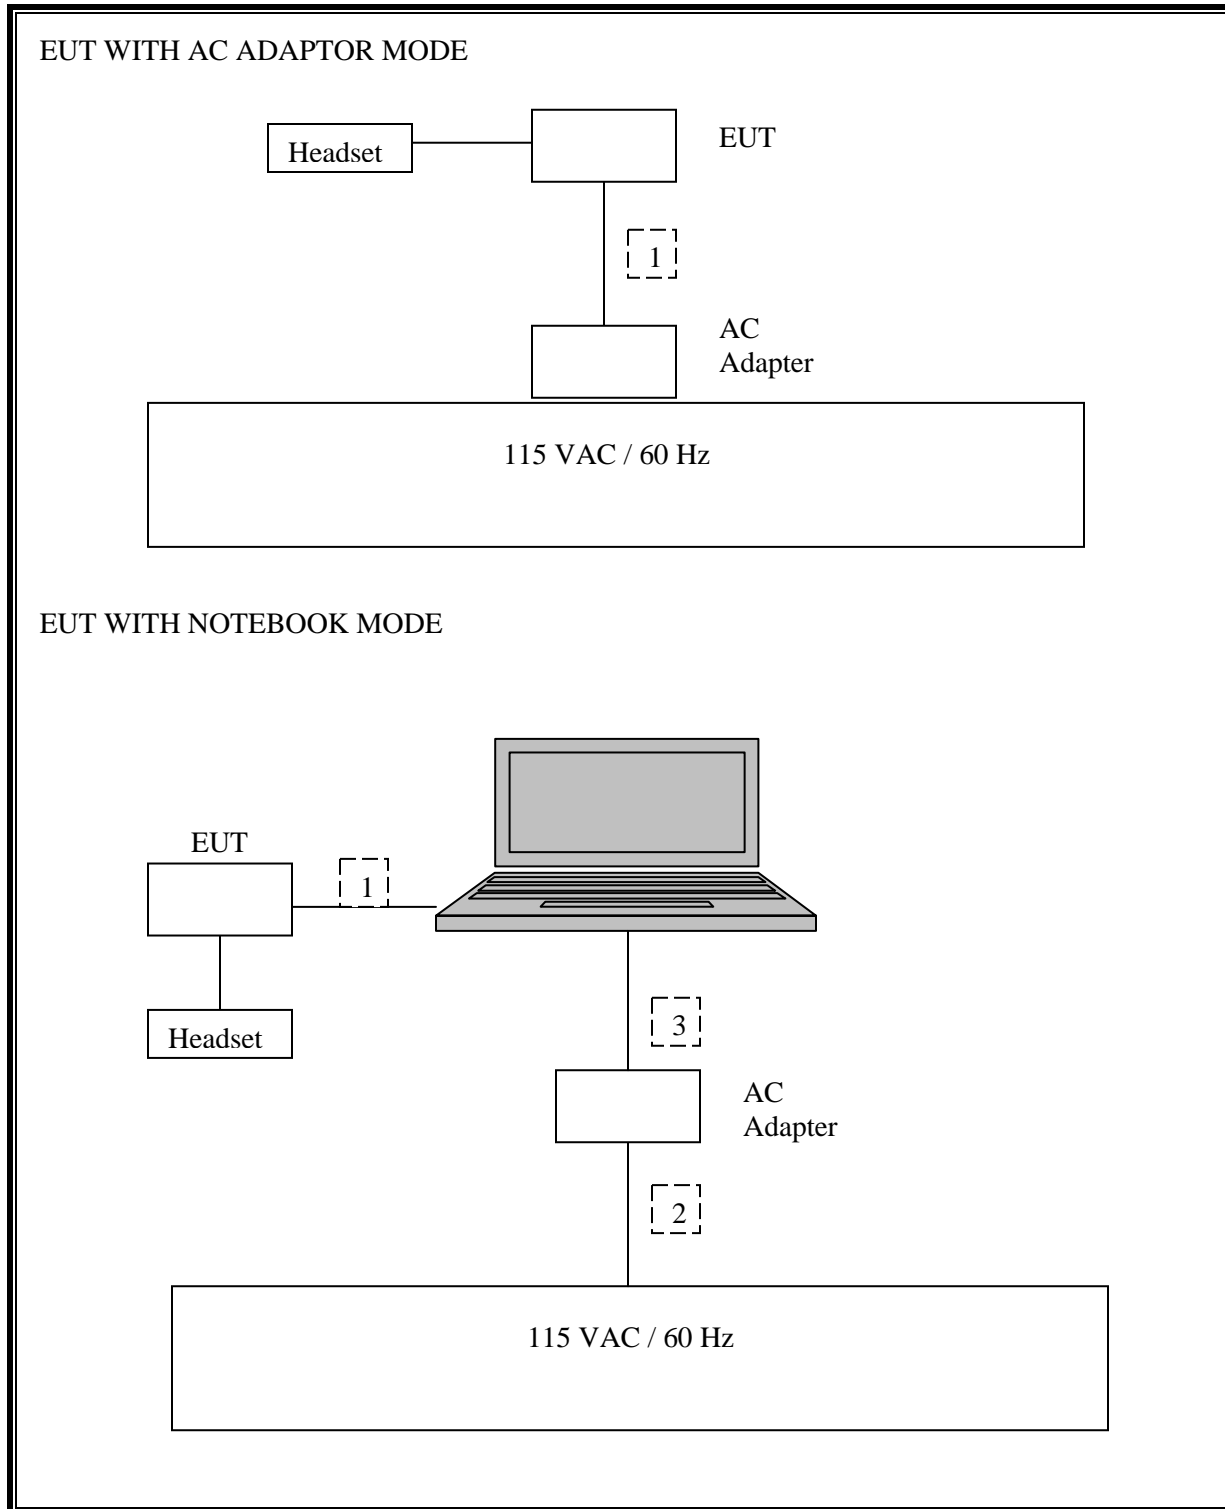



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	1/27/08
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	9/15/07
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	9/15/07
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	1/7/08
SA Display Section 2	Agilent / HP	85662A	2816A16696	4/7/08
Quasi-Peak Adaptor	Agilent / HP	85650A	3145A01654	1/21/08
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00931	8/3/08
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	4/15/08
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	10/13/07
Preamp 30-1000MHz	Sonoma	310N	185623	1/20/08
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	MY43360112	8/7/08
Power Sensor 10MHz - 18GHz	Agilent / HP	8481A	2702A66876	4/22/08
Power Meter	Agilent / HP	438A	2822A05684	6/20/08
Peak Power Meter	Agilent	E4416A	GB41291160	12/2/07
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/2/07
2.4-2.5 GHz Reject Filter	Micro-Tronics	BRM50702	1	CNR

## 7. LIMITS AND RESULTS

### 7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

#### 7.1.1. 6 dB BANDWIDTH

##### LIMIT

§15.247 (a) (2)

RSS-210 Clause A8.2 (1)

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

##### RESULTS

No non-compliance noted:



##### 802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	10070	500	9570
Middle	2437	10070	500	9570
High	2462	10000	500	9500

##### 802.11g Mode



Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16600	500	16100
Middle	2437	16530	500	16030
High	2462	16530	500	16030


**6 DB BANDWIDTH (802.11b MODE)**

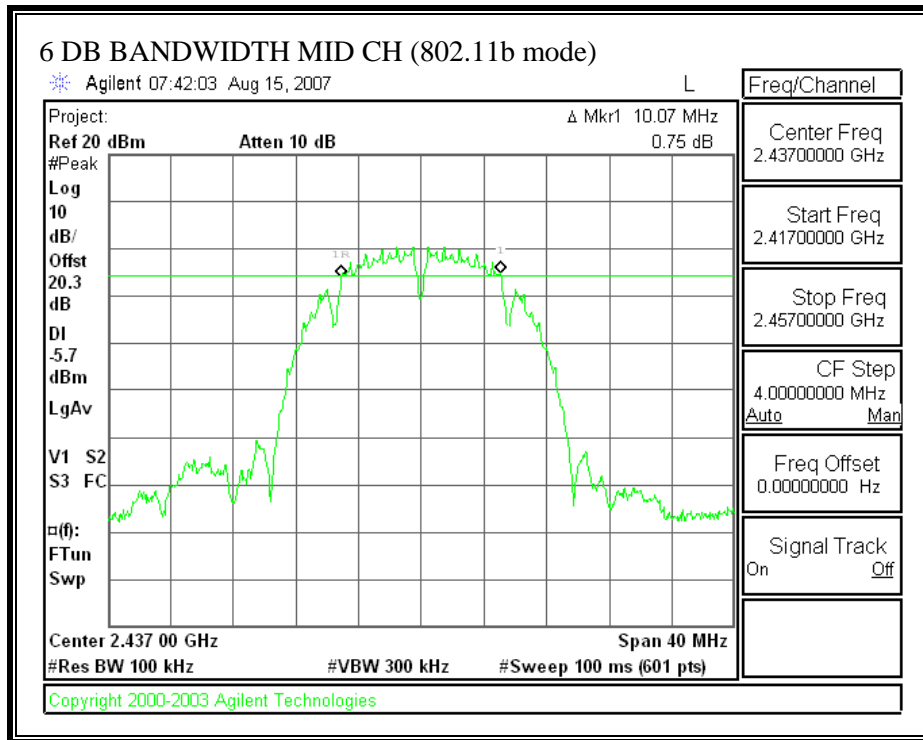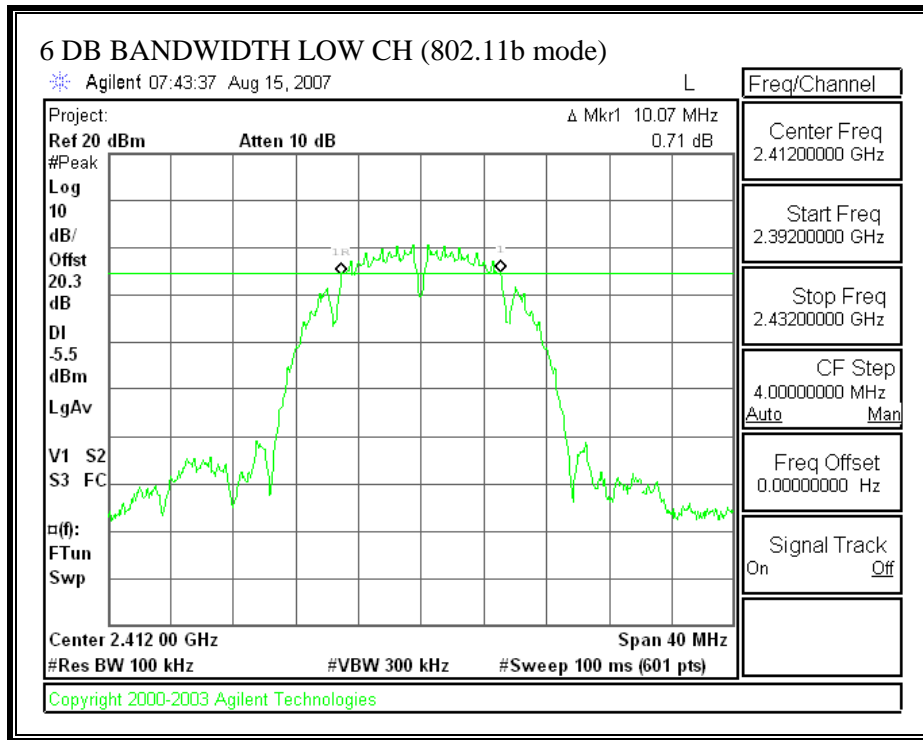

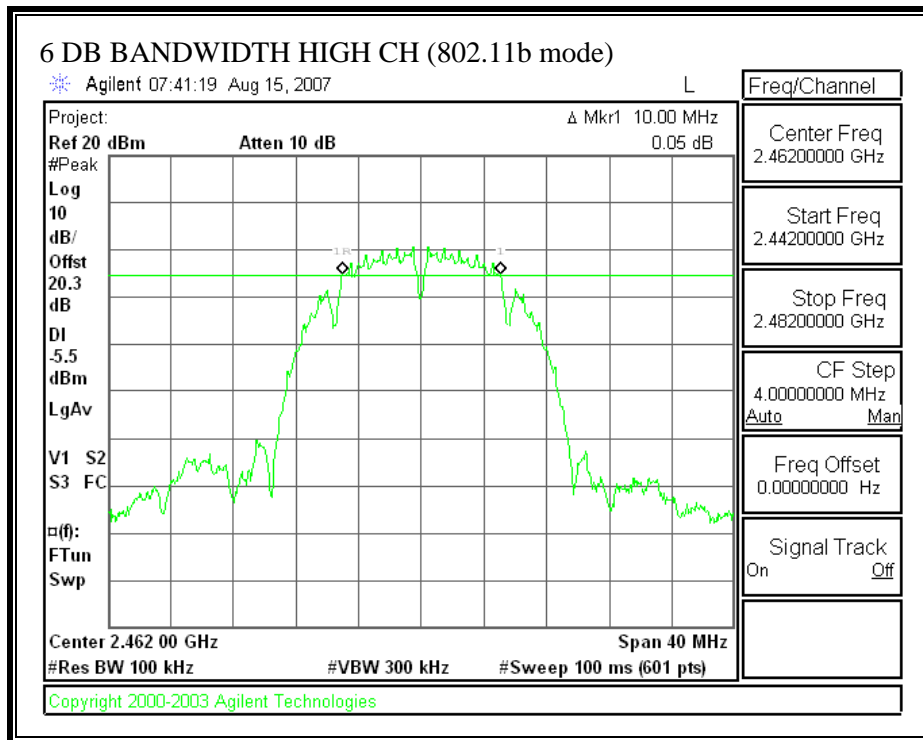

**6 DB BANDWIDTH (802.11g MODE)**

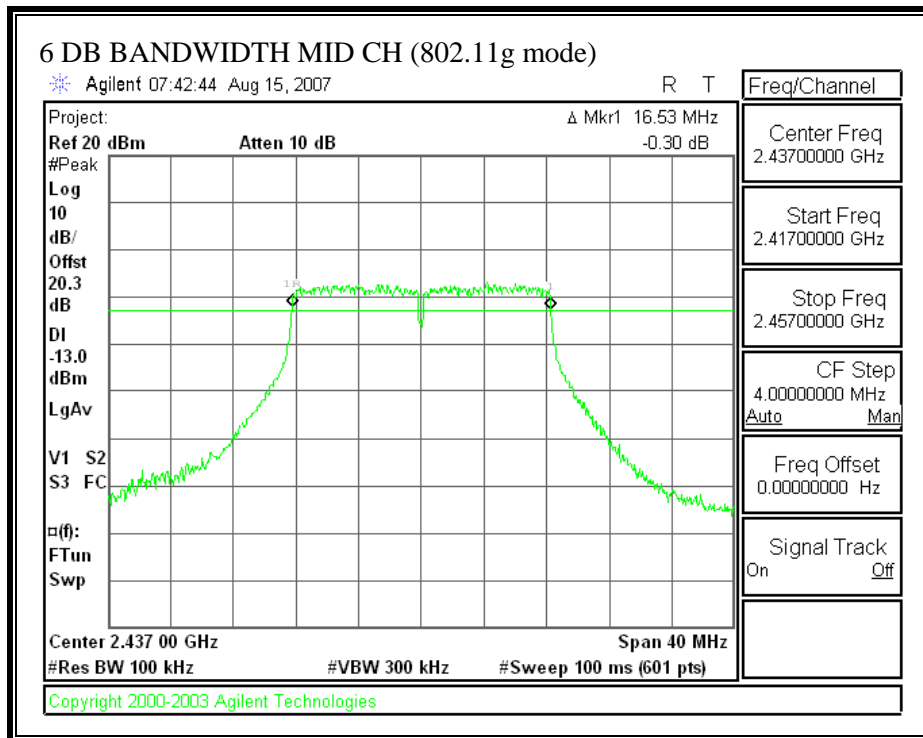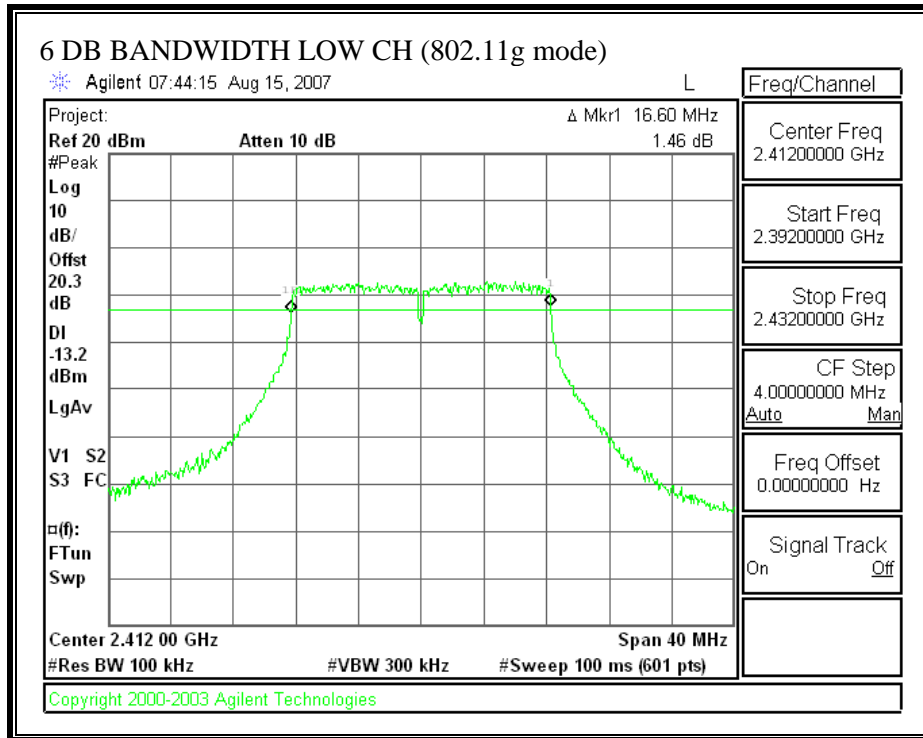

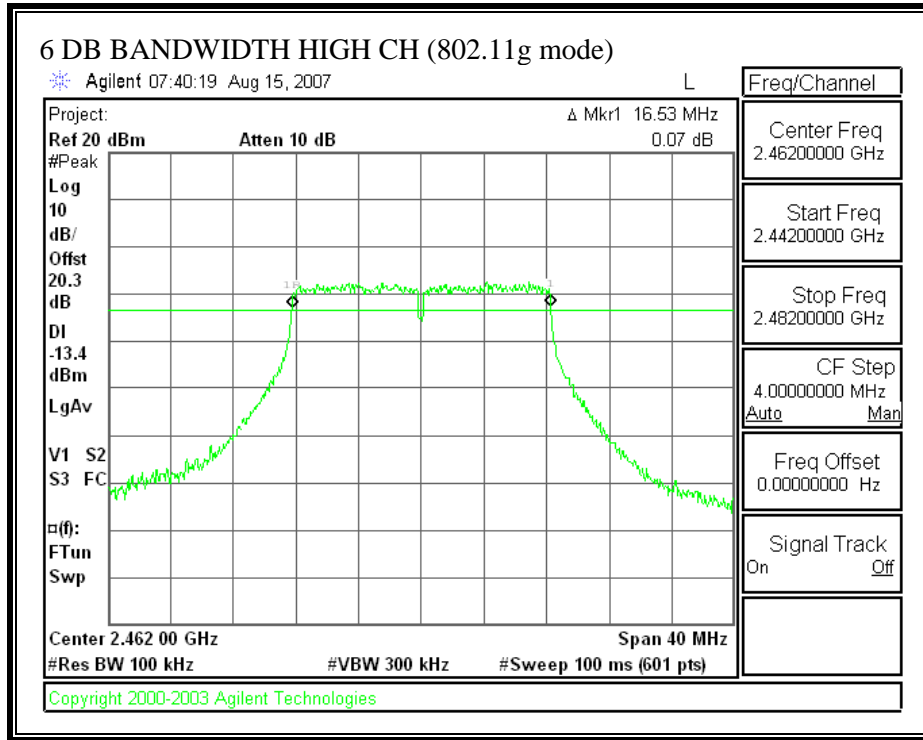

### 7.1.2. 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS



##### 802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.7187
Middle	2437	13.7034
High	2462	13.6811


##### 802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5672
Middle	2437	16.5840
High	2462	16.6003



**99% BANDWIDTH (802.11b MODE)**

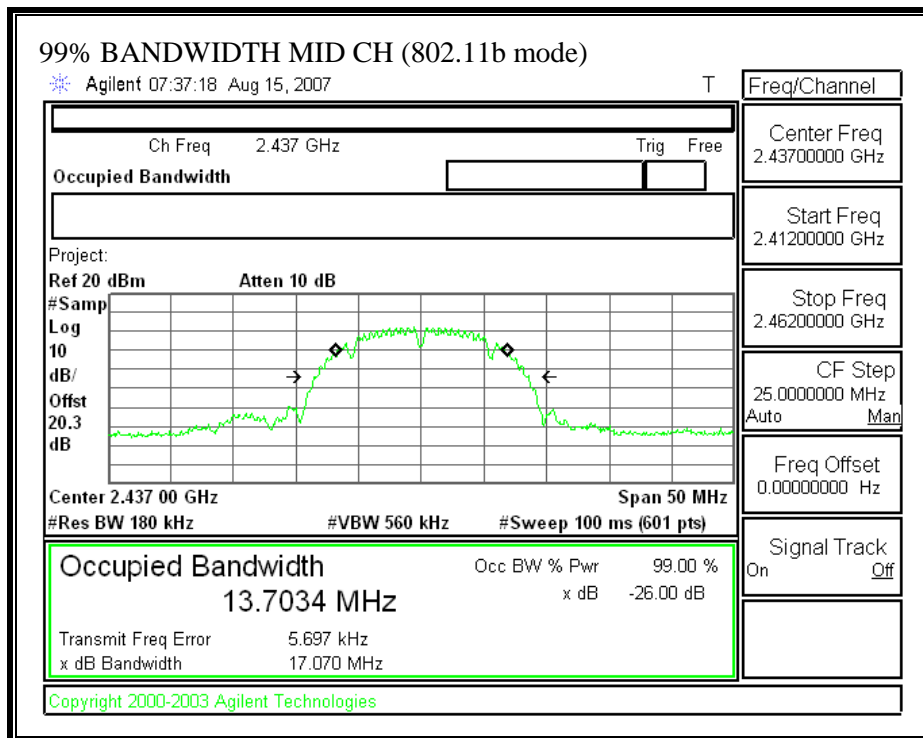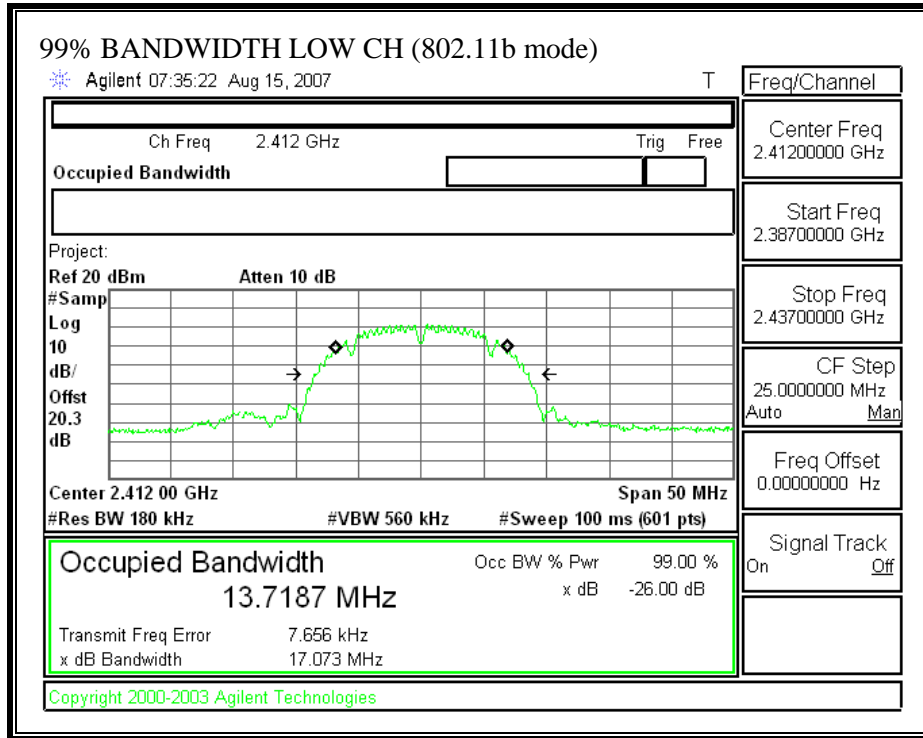




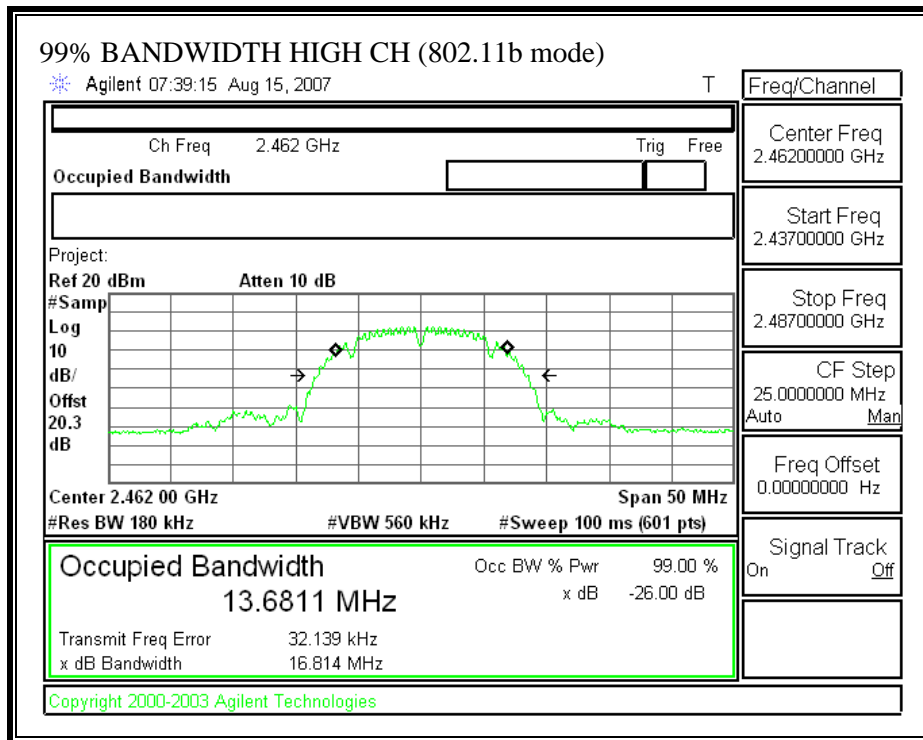

**99% BANDWIDTH (802.11g MODE)**

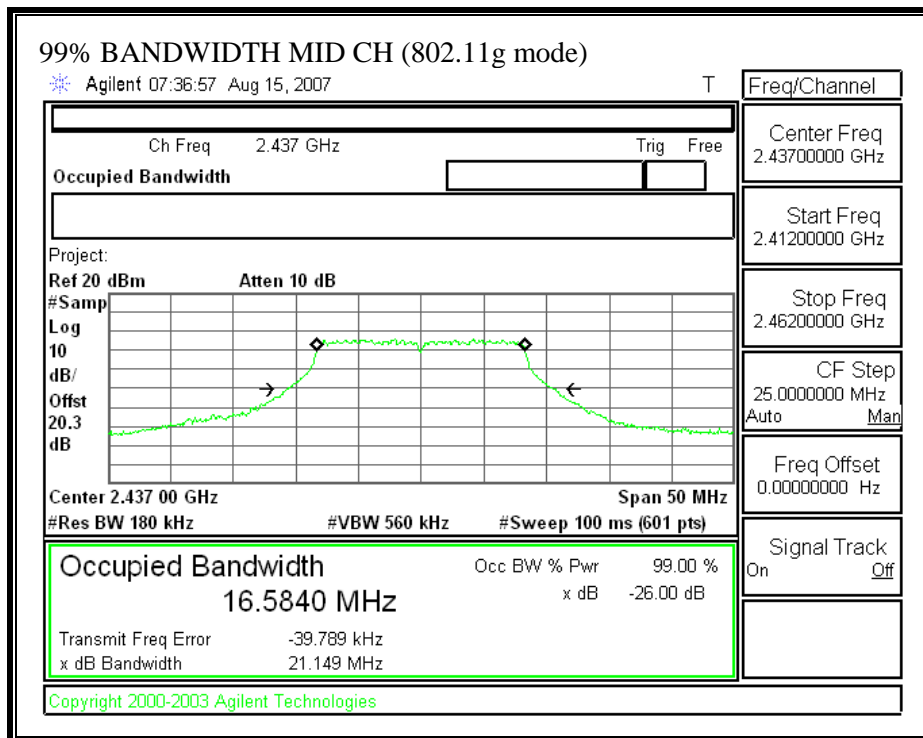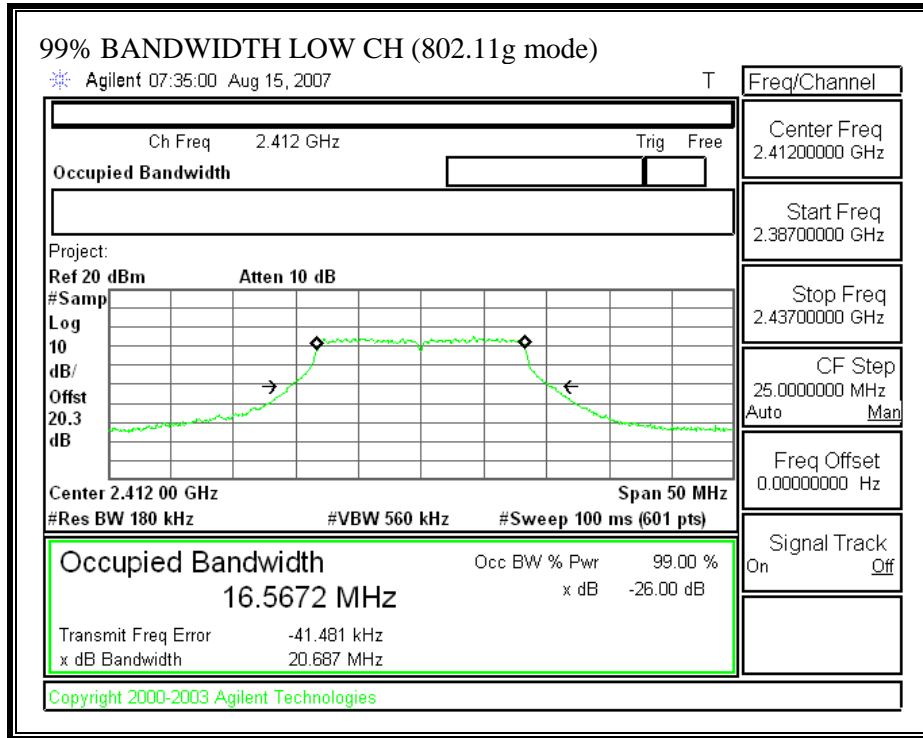

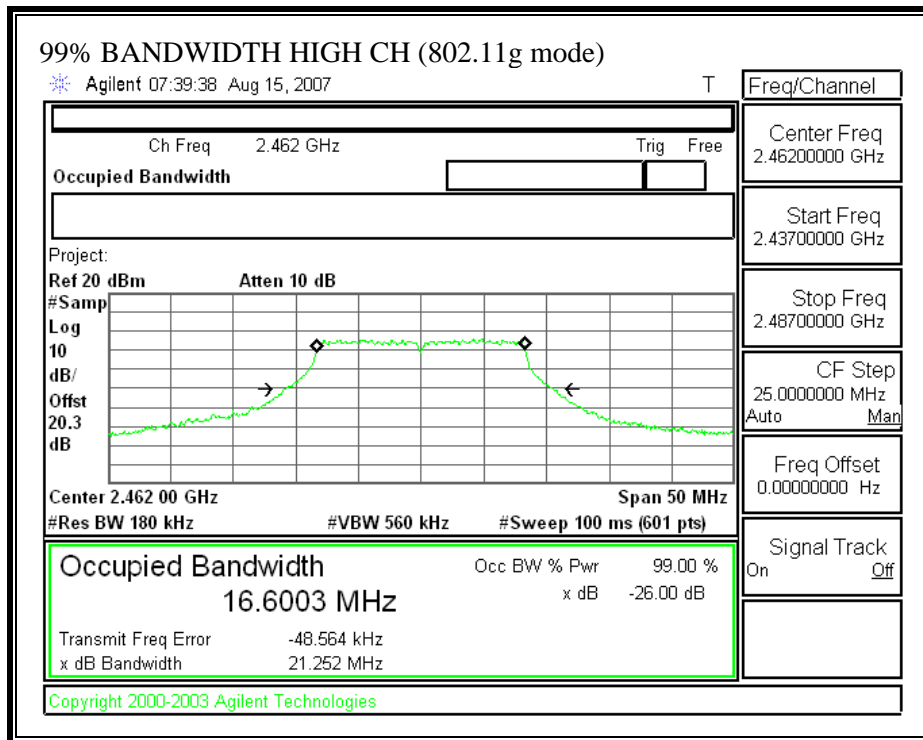

### **7.1.3. PEAK OUTPUT POWER**

#### **PEAK POWER LIMIT**

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

**RESULTS**

The maximum antenna gain is 1dBi @ 2.45GHz for other than fixed, point-to-point operations, therefore the limit is still 30 dBm for 2.45GHz band.

No non-compliance noted:



802.11b Mode


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	2412	12.59	30	-17.41
Middle	2437	12.96	30	-17.04
High	2462	13.49	30	-16.51

802.11g Mode



<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	2412	10.87	30	-19.13
Middle	2437	11.30	30	-18.70
High	2462	11.39	30	-18.61

**OUTPUT POWER (802.11b MODE)**

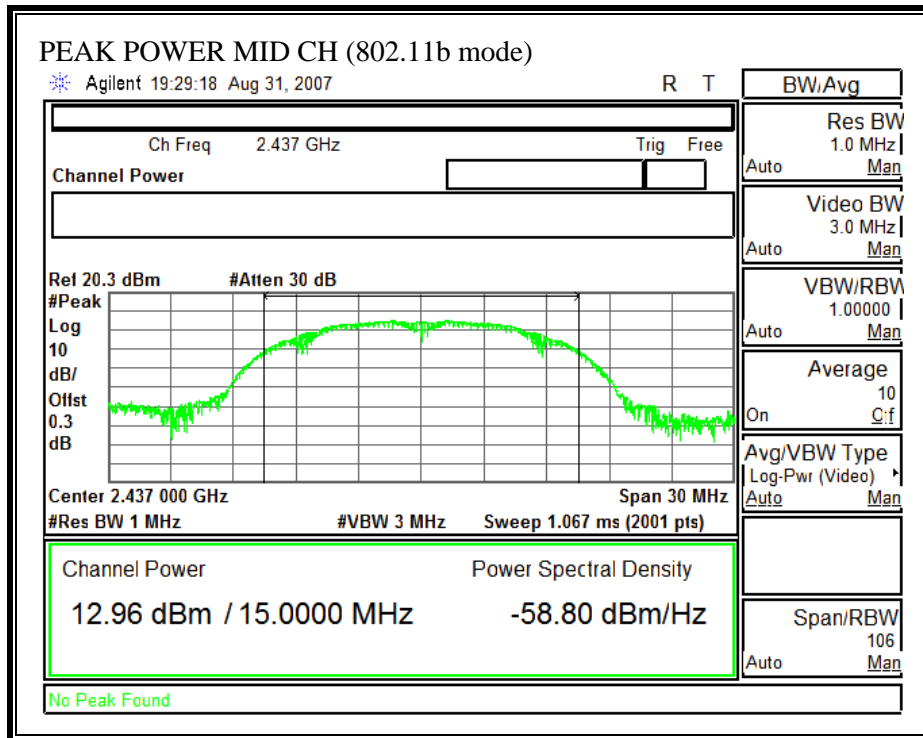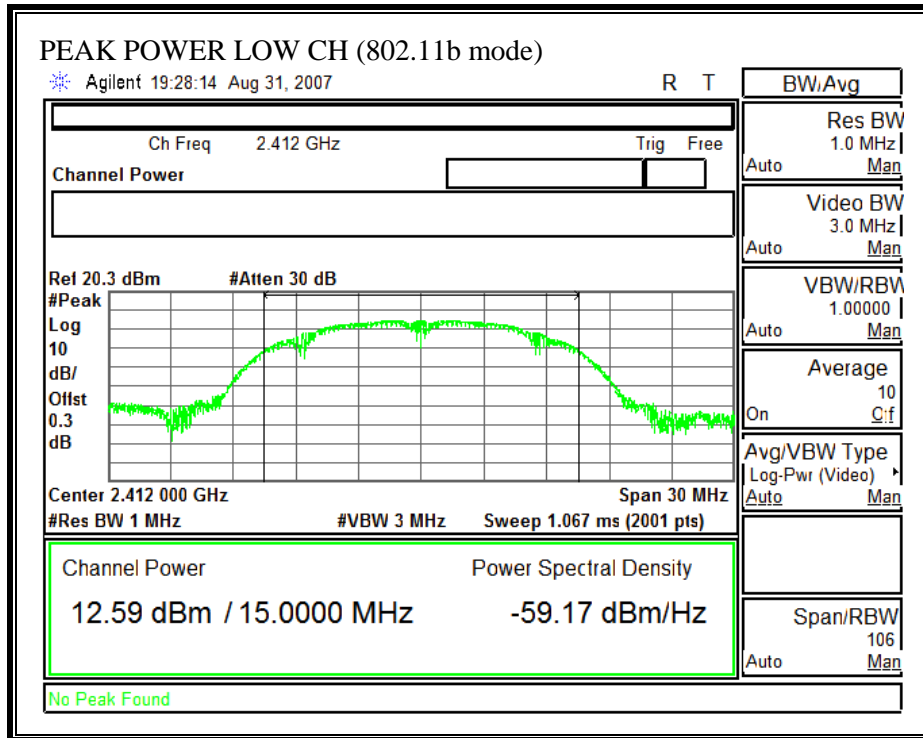


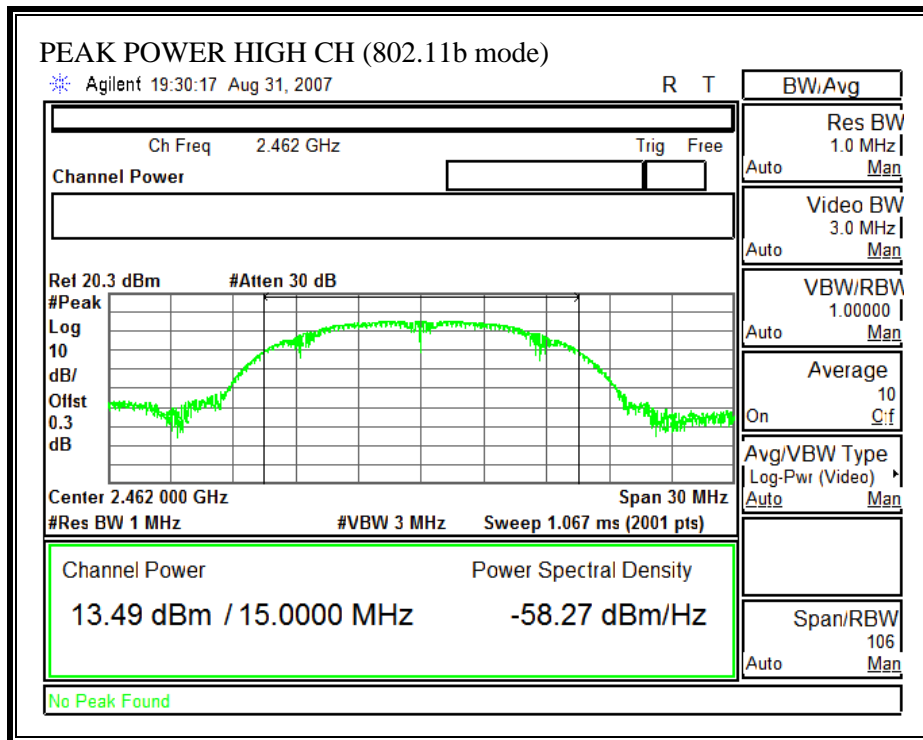

**OUTPUT POWER (802.11g MODE)**

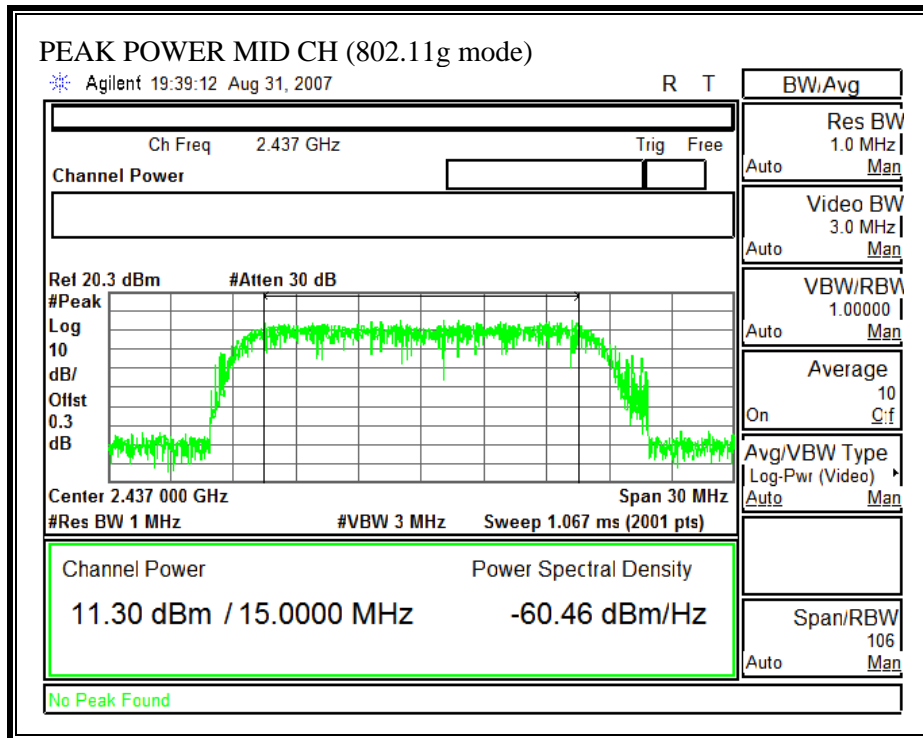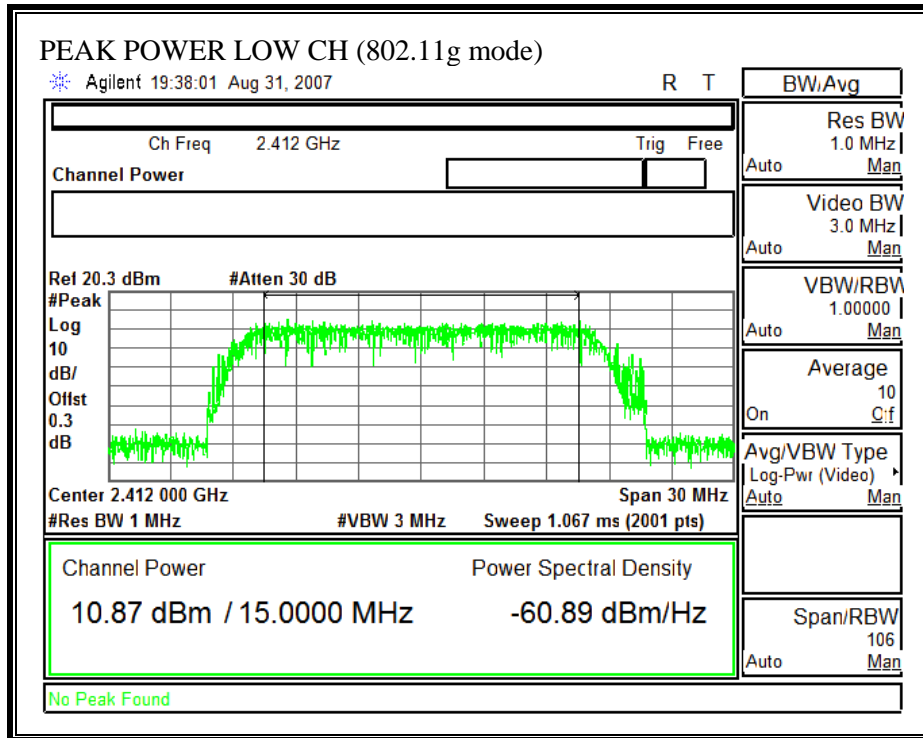



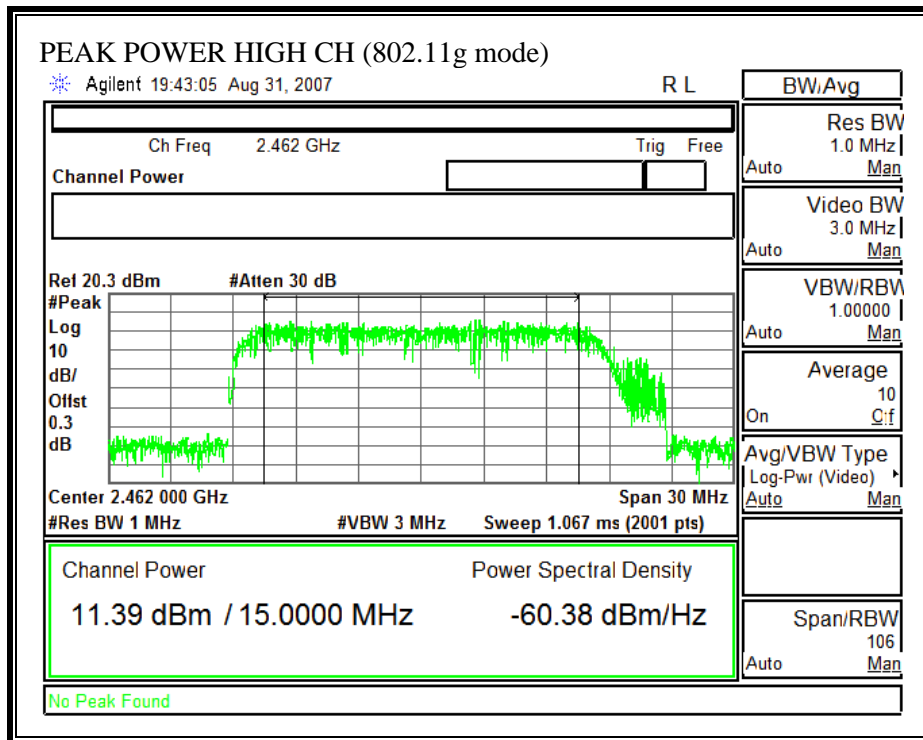

### 7.1.4. AVERAGE POWER

#### AVERAGE POWER LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 0.3 dB (including 0 dB pad and 0.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

##### 802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	10.75
Middle	2437	11.10
High	2462	11.11

##### 802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	8.69
Middle	2437	9.04
High	2462	9.62

**7.1.5. PEAK POWER SPECTRAL DENSITY (FCC)**

**LIMIT**

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

**RESULTS**



802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.72	8	-16.72
Middle	2437	-9.12	8	-17.12
High	2462	-8.41	8	-16.41

802.11g Mode



Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-17.41	8	-25.41
Middle	2437	-17.46	8	-25.46
High	2462	-16.89	8	-24.89


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

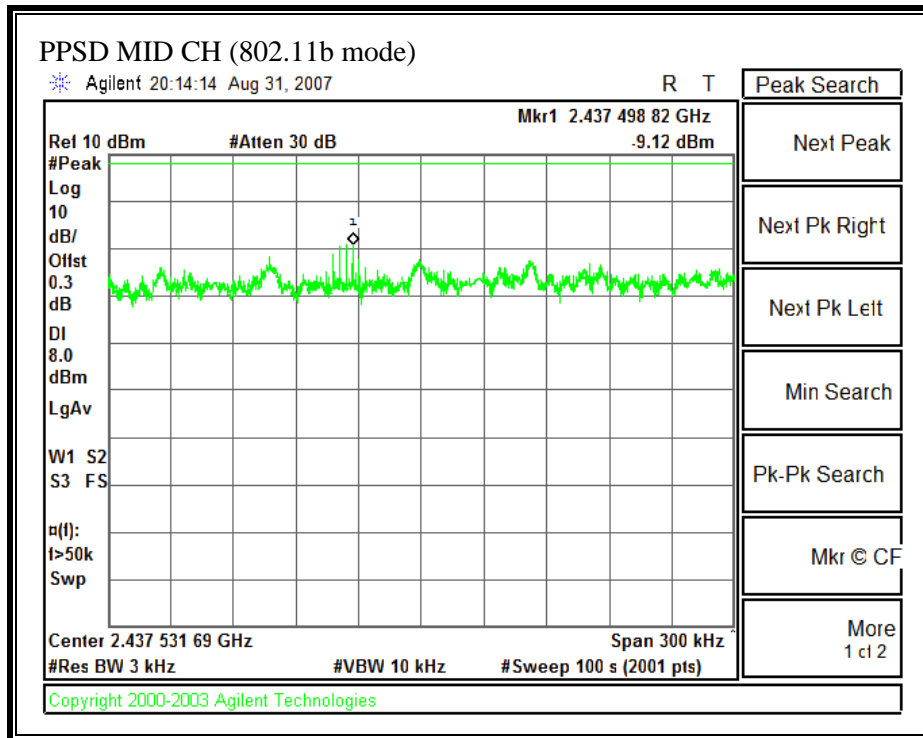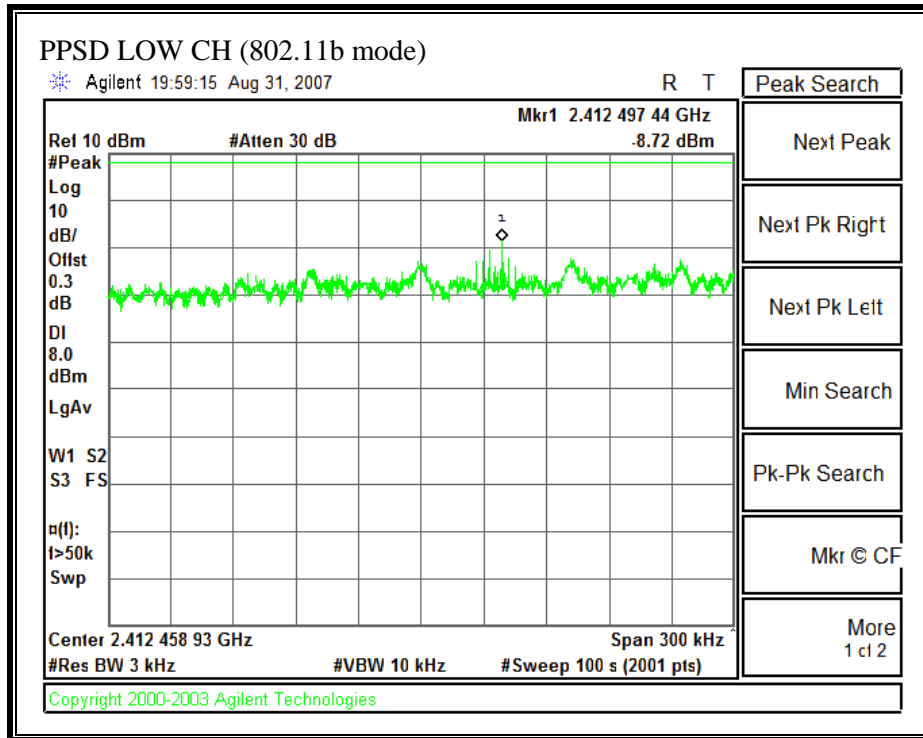

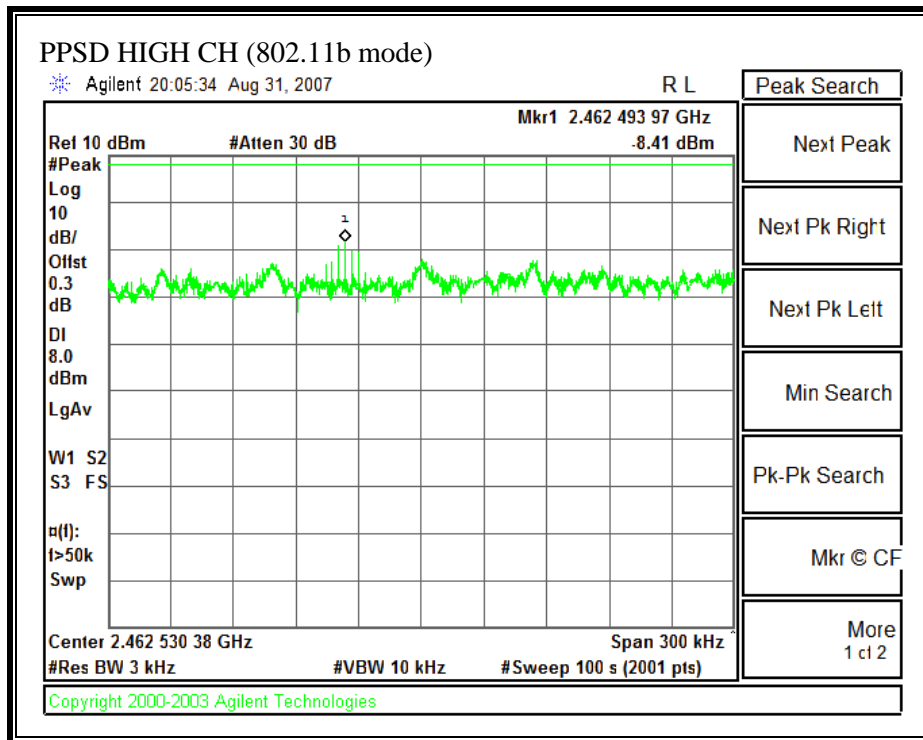

**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

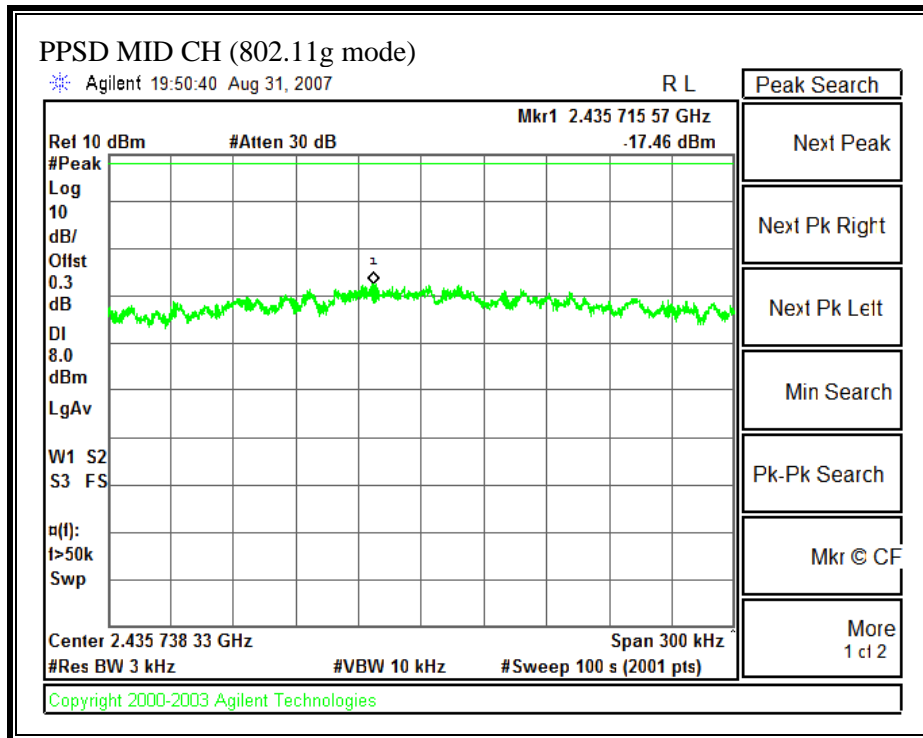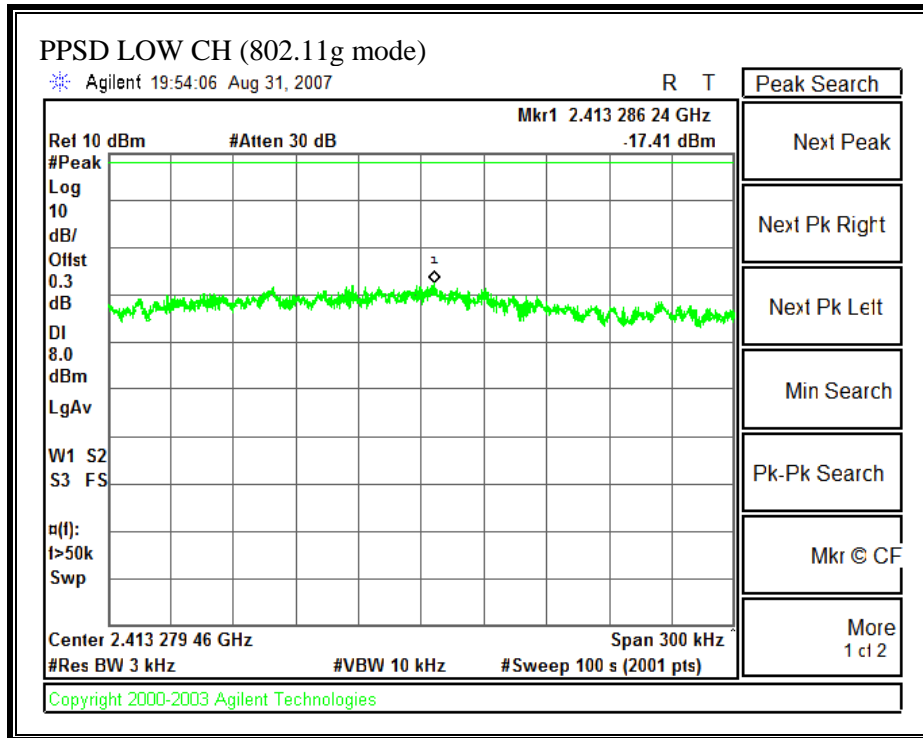

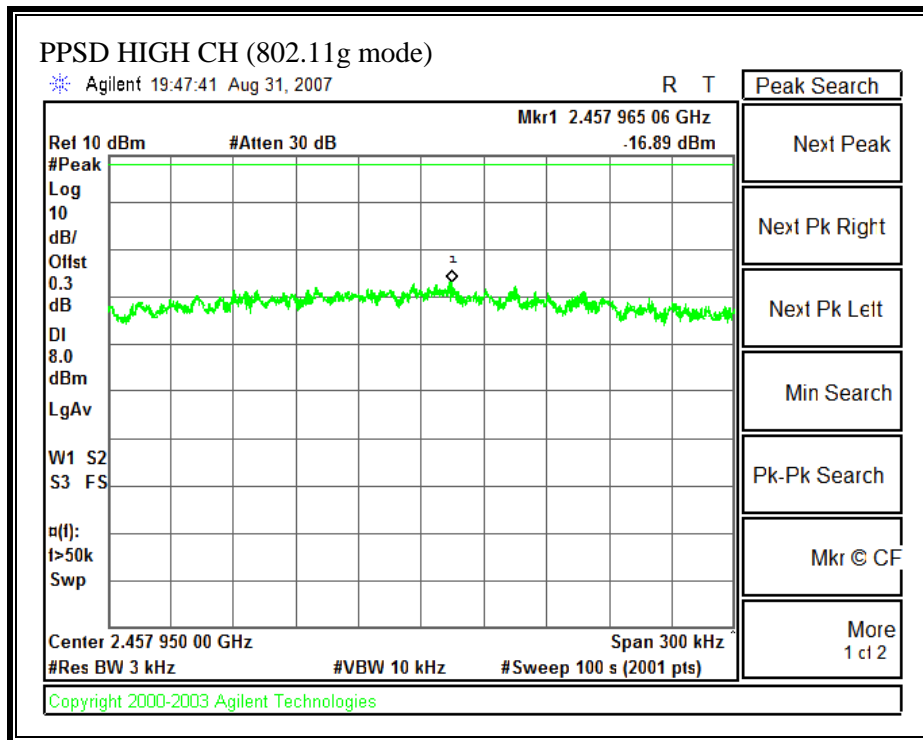

## 7.1.6. CONDUCTED SPURIOUS EMISSIONS

### **LIMITS**

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### **RESULTS**



No non-compliance noted:





**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

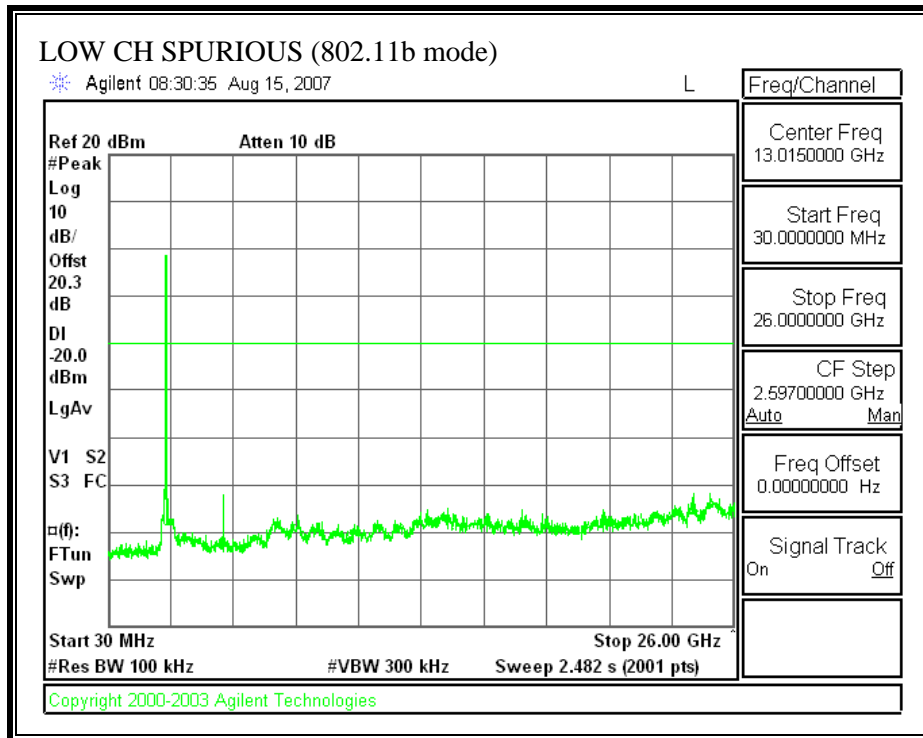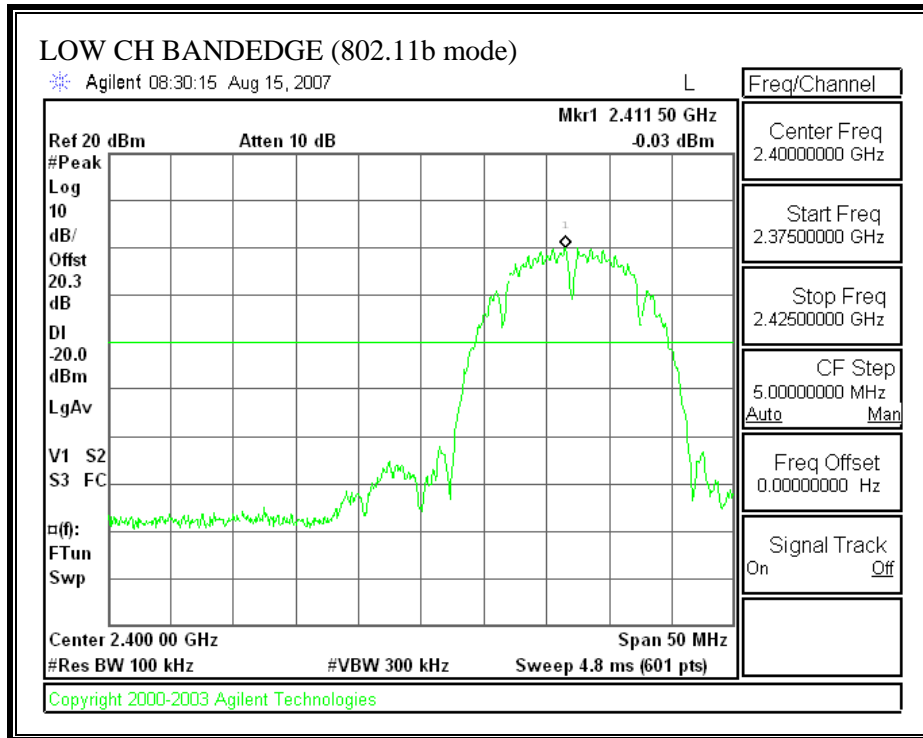



**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

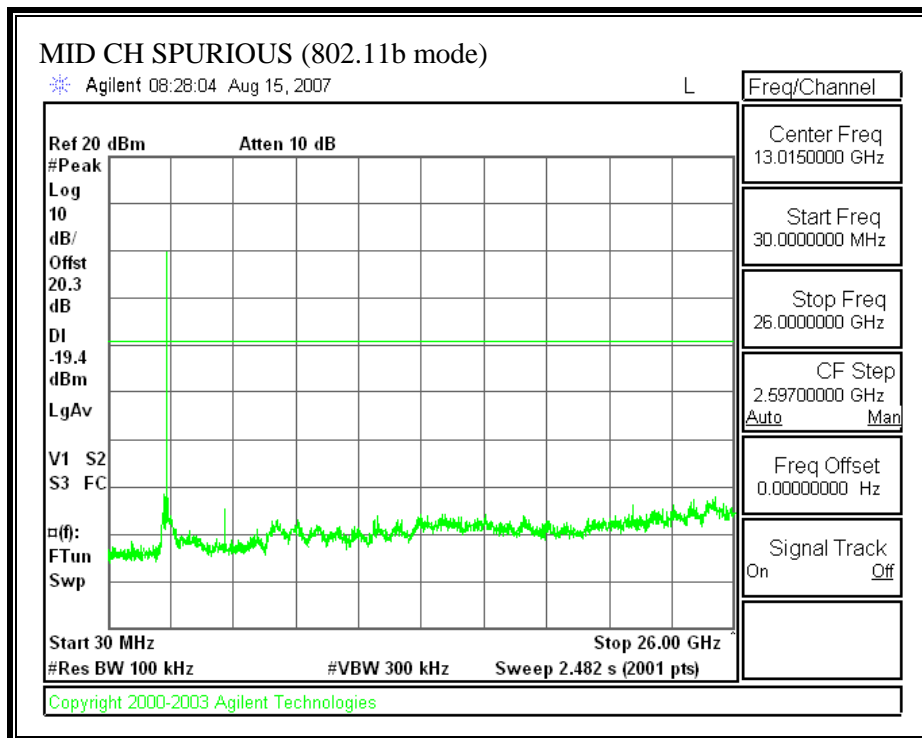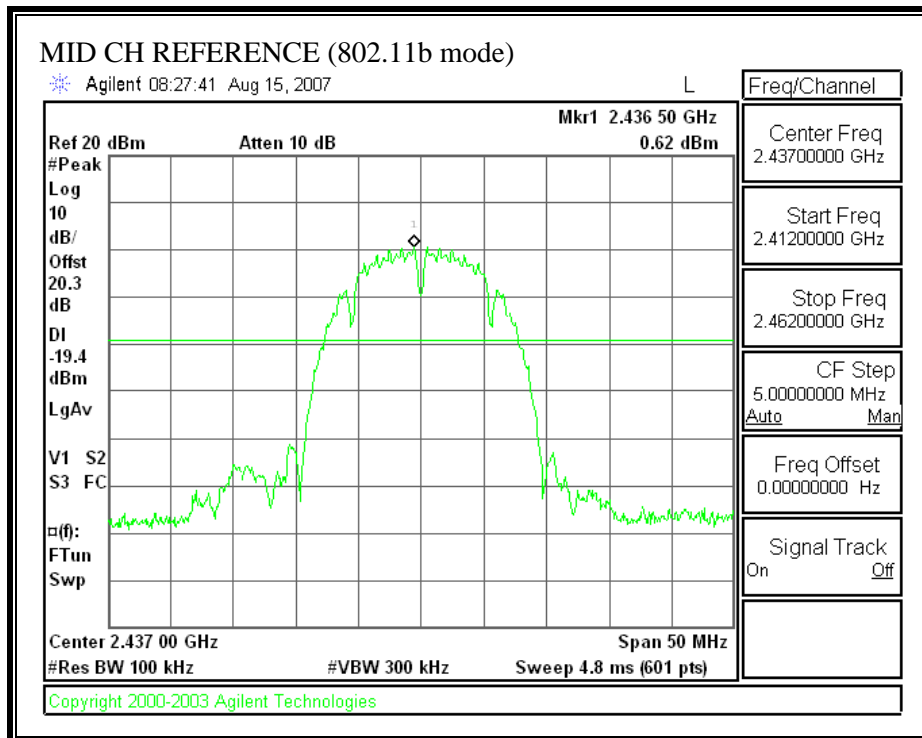



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

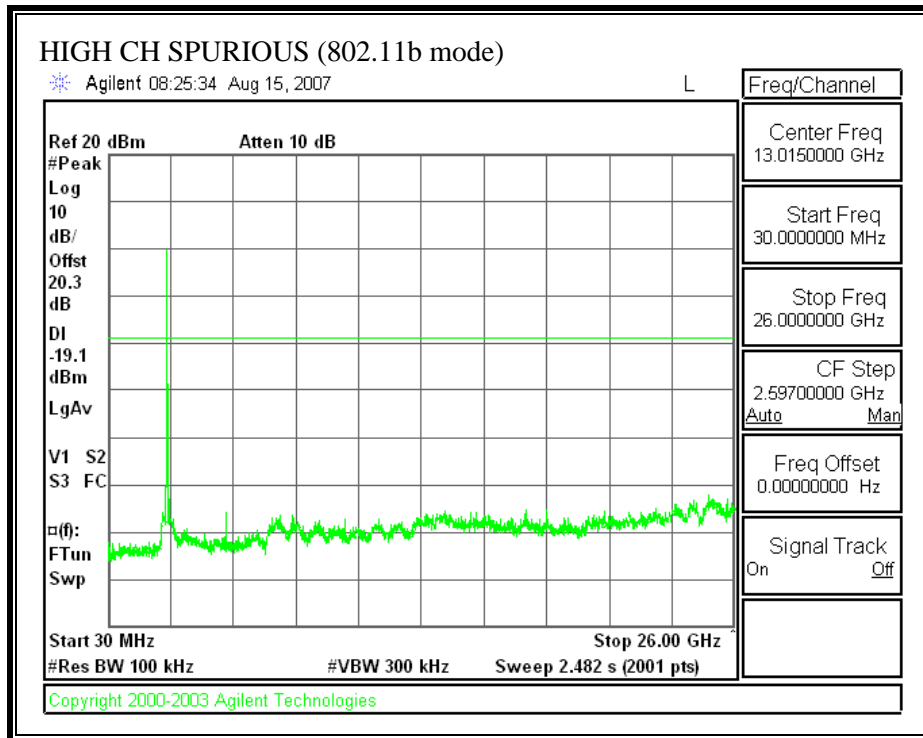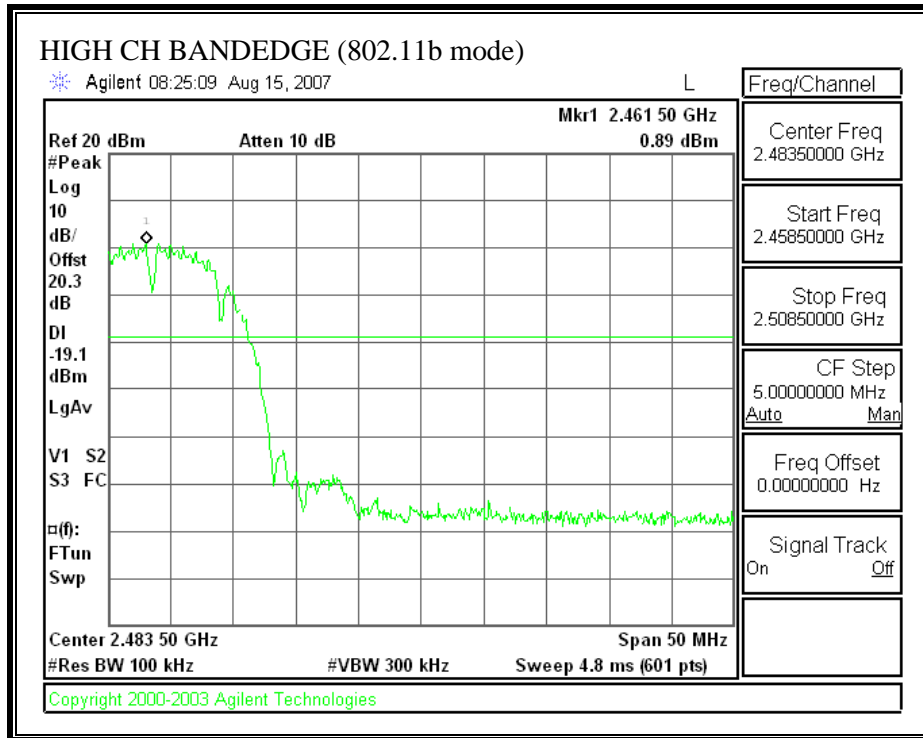



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

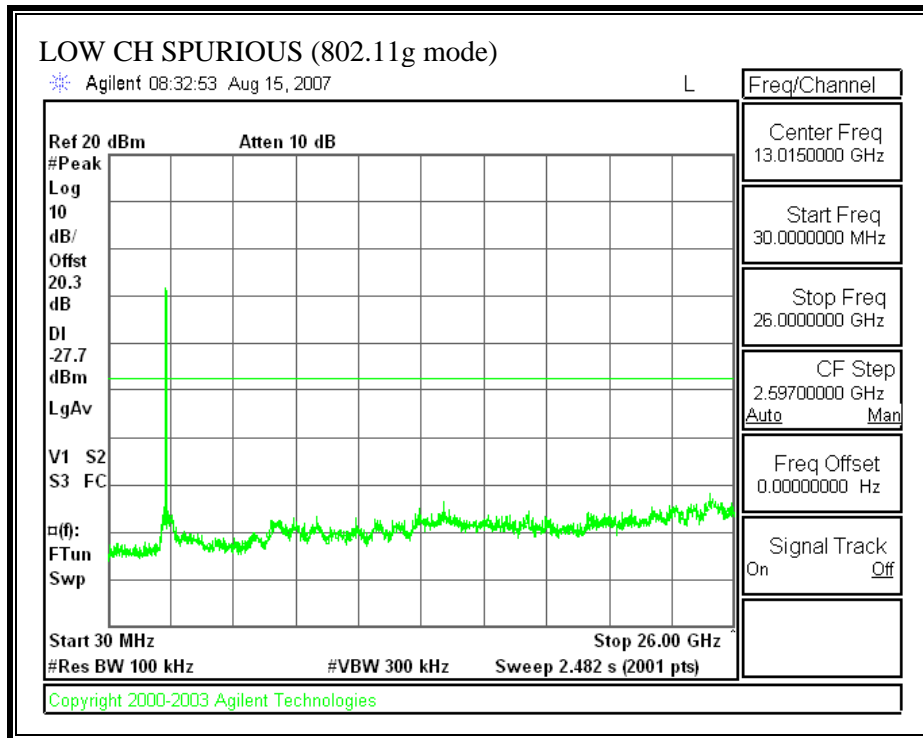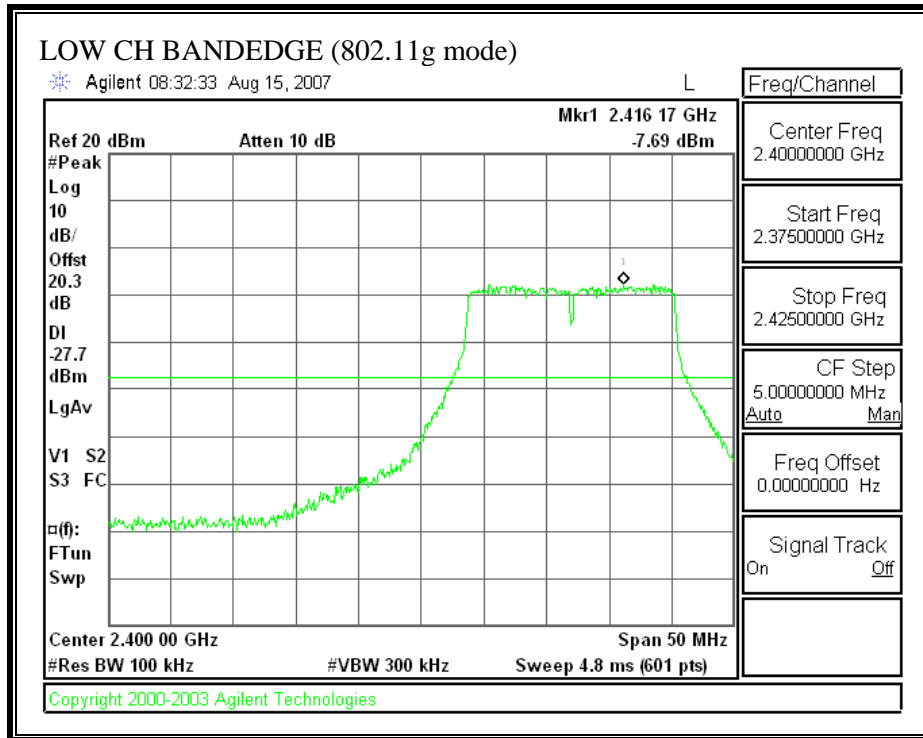

**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

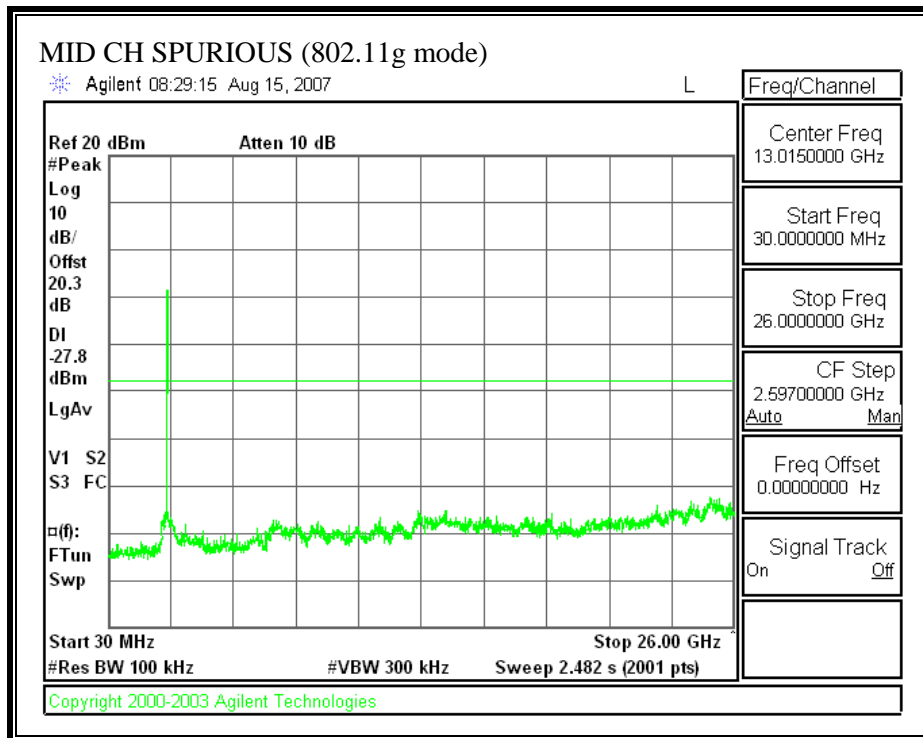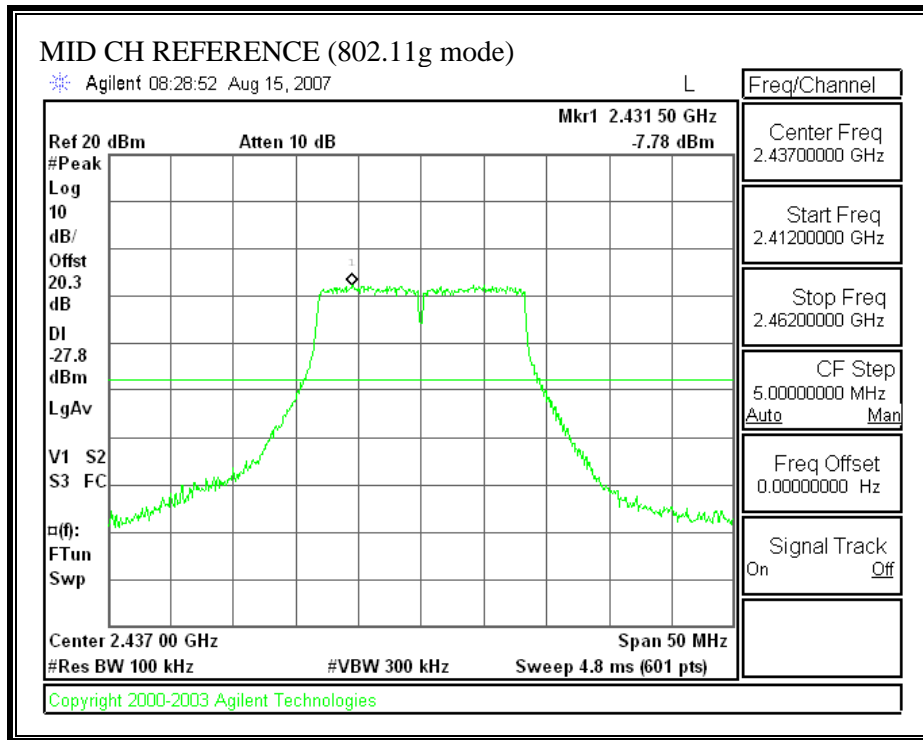

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

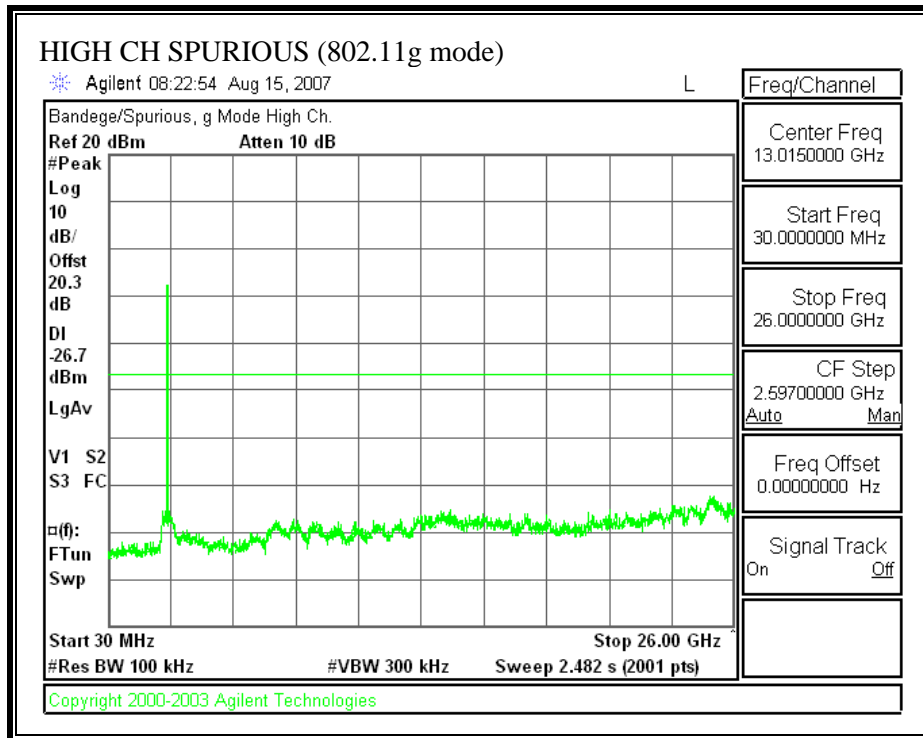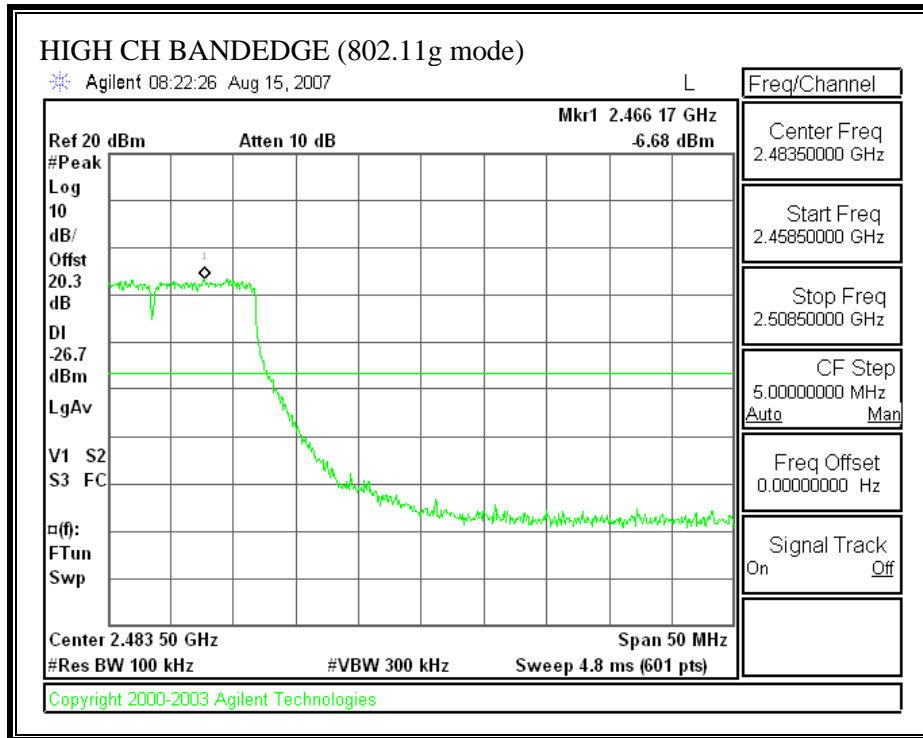

## 7.2. RADIATED EMISSIONS

### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.



For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



**7.2.1. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND**

**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)**

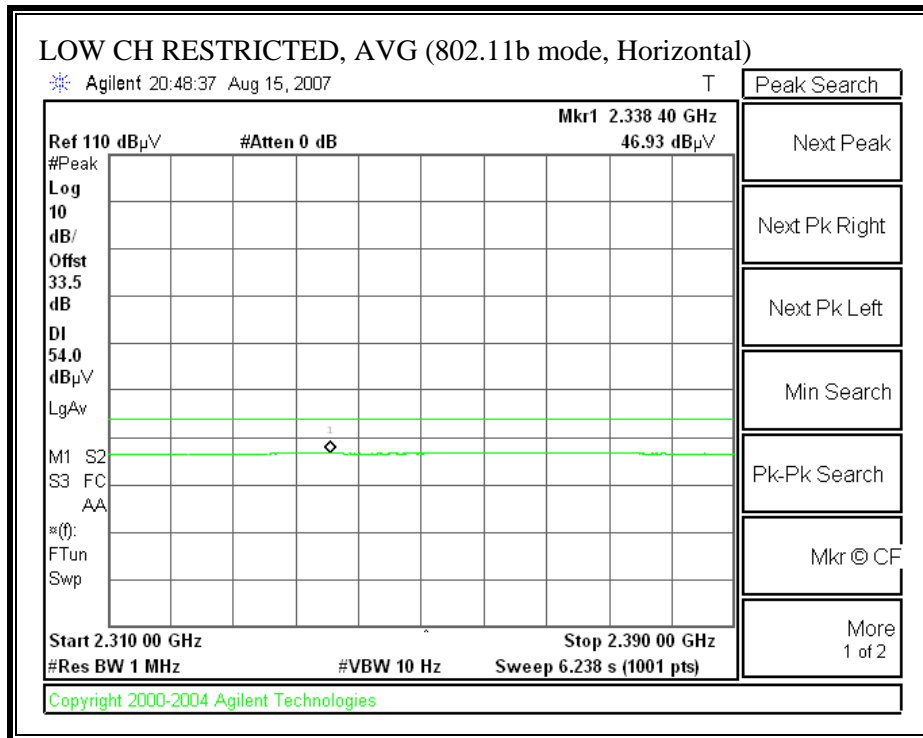
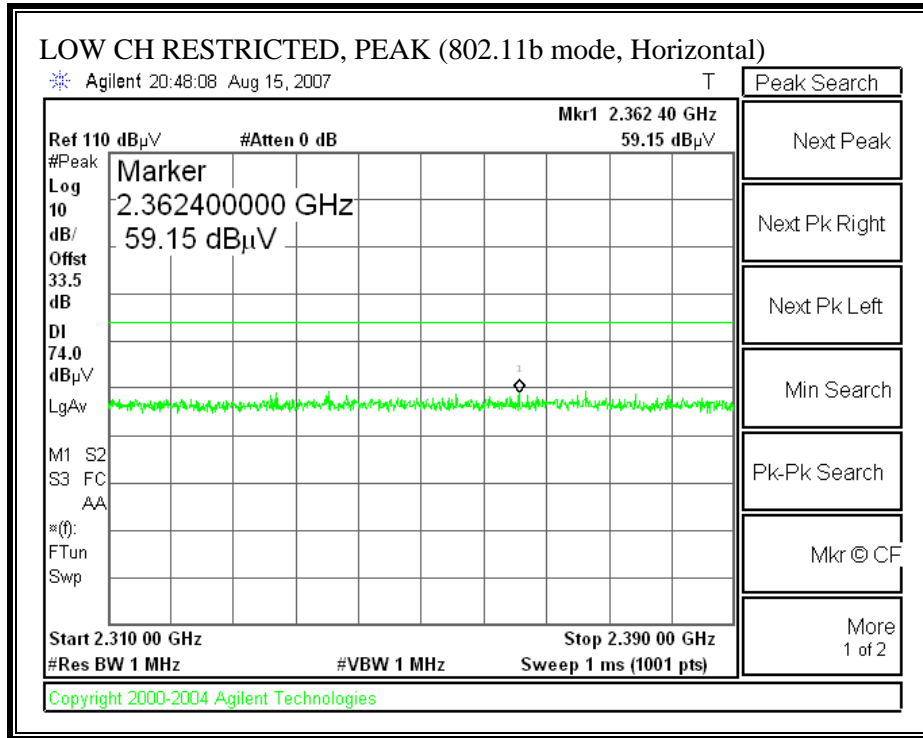






**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

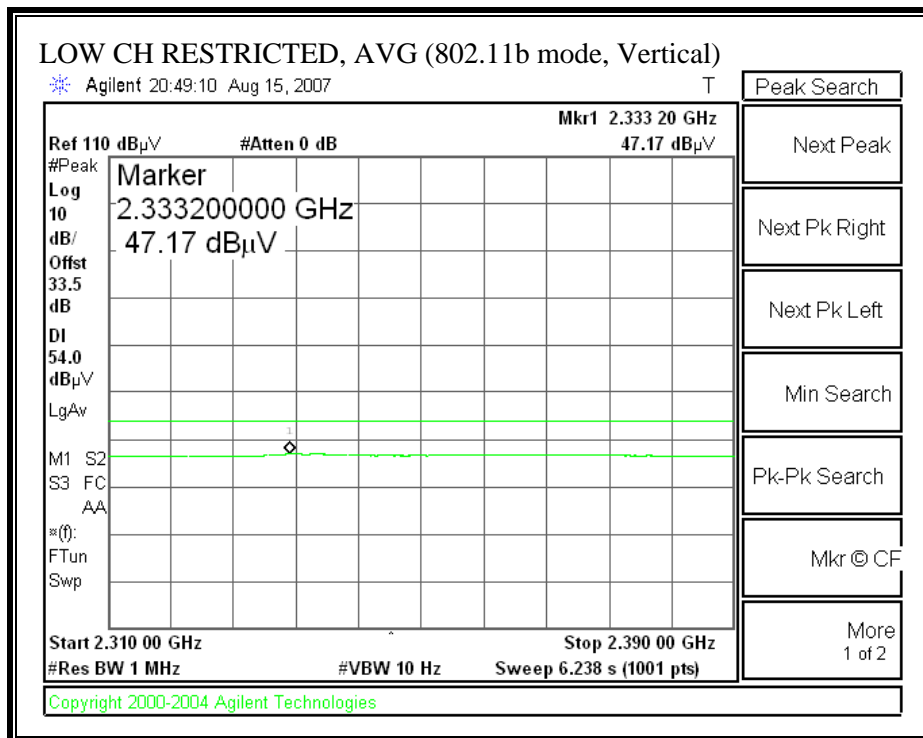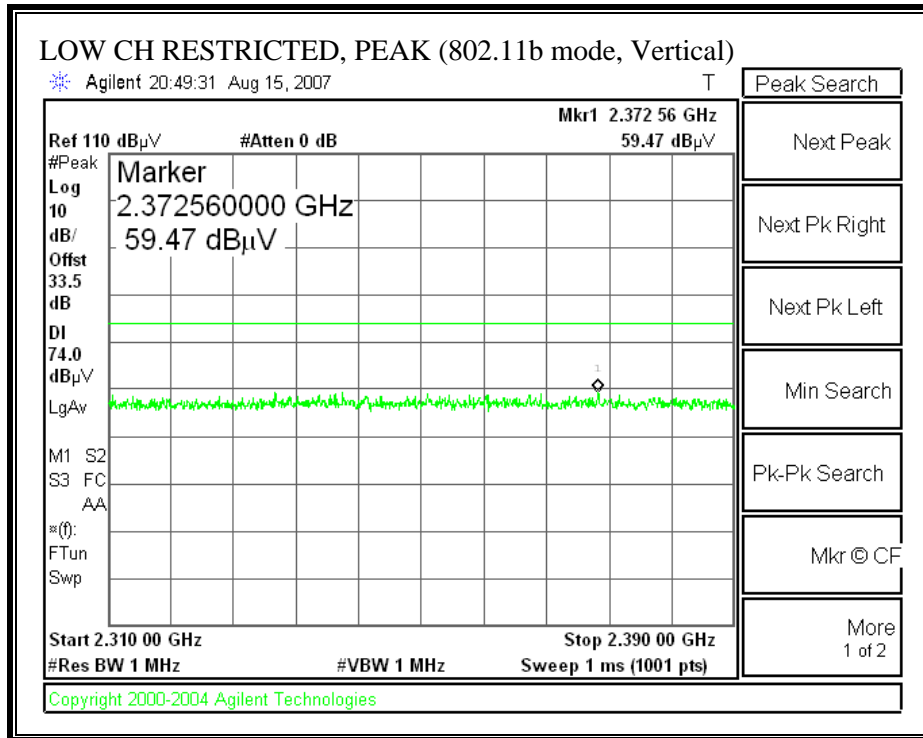

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

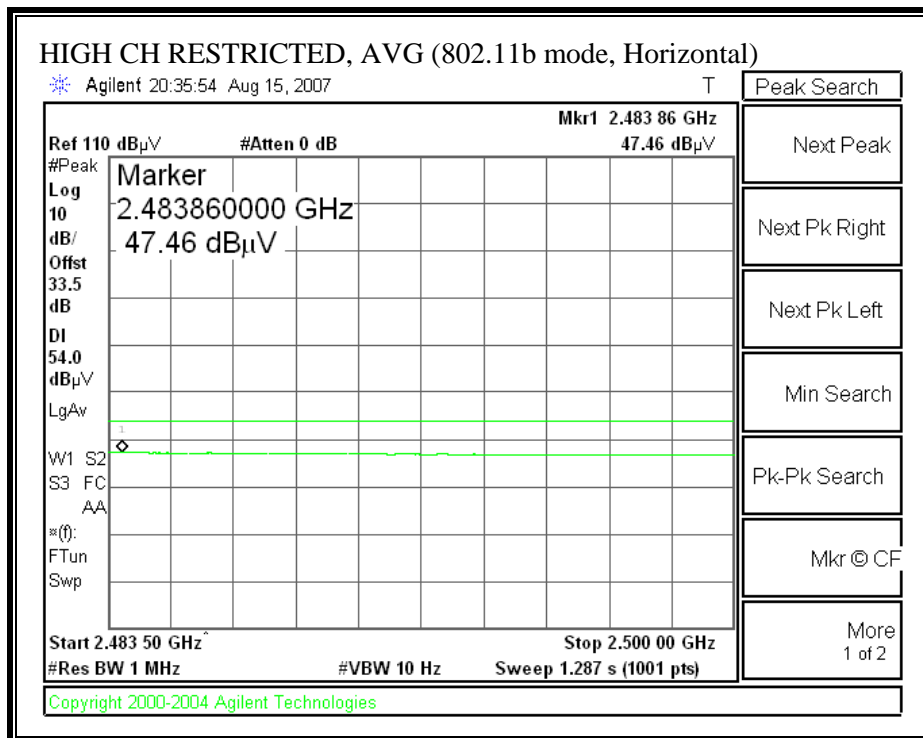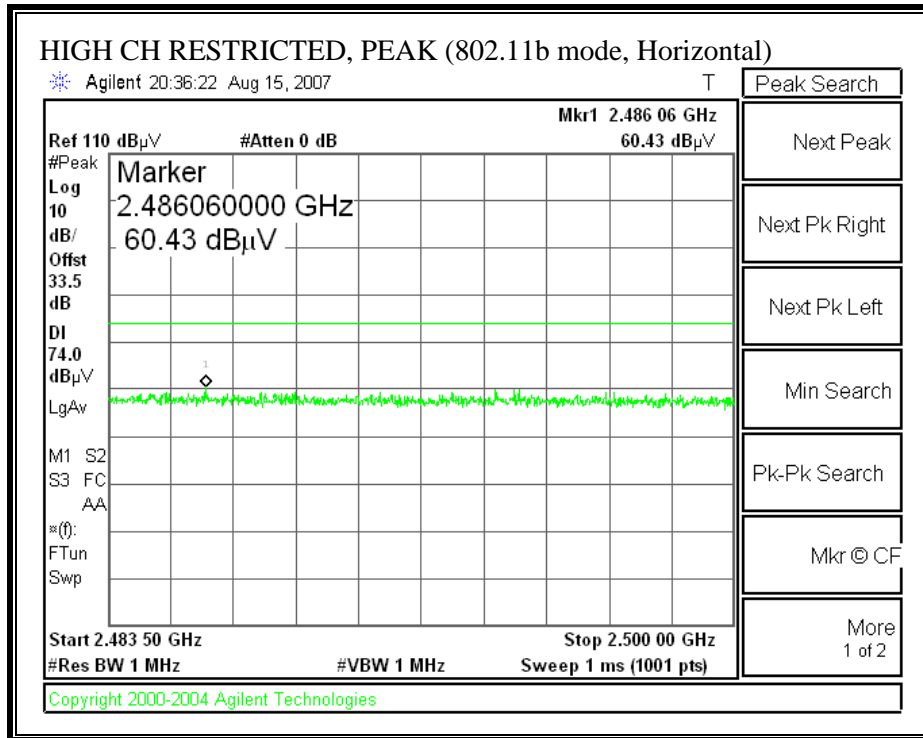



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

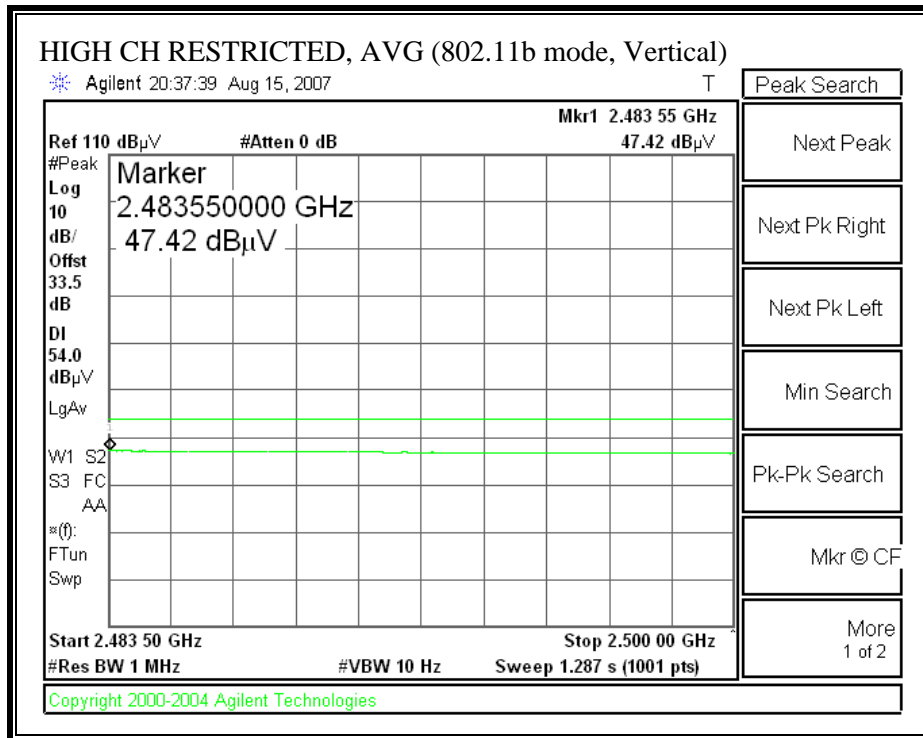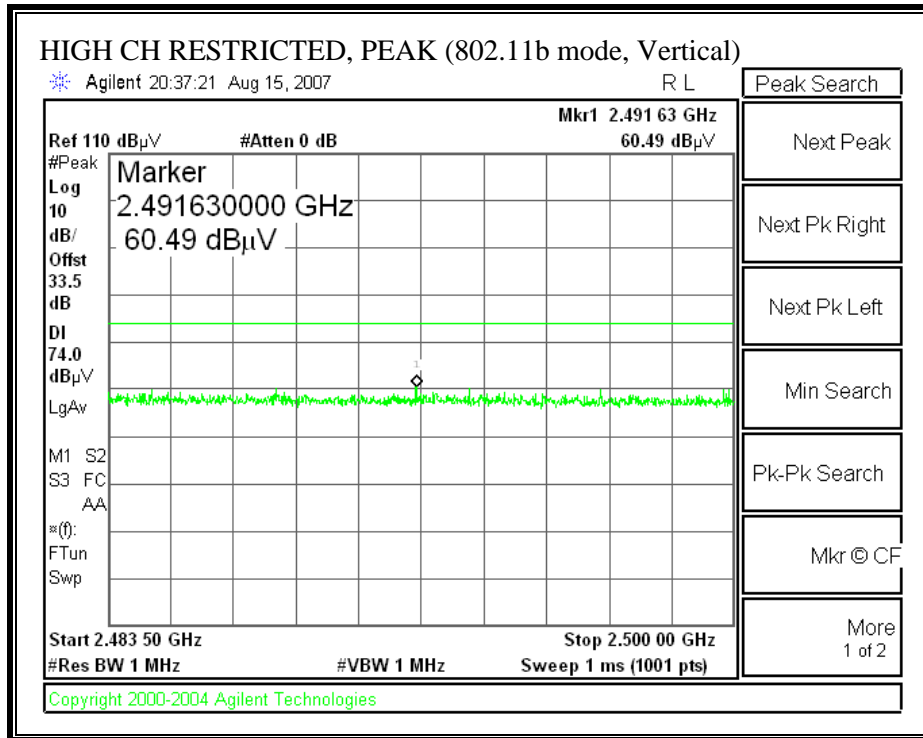



**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**

<b>High Frequency Measurement</b>																
Compliance Certification Services, Fremont 5m Chamber																
Company: Microsoft																
Project #: 07U11225																
Date: 09/04/07																
Test Engineer: Devin Chang																
Configuration: EUT only																
Mode: B Mode-TX																
Model: 1124 and 1125																
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T60; S/N: 2238 @3m			T144 Miteq 3008A00931									FCC 15.209				
Hi Frequency Cables																
2 foot cable			3 foot cable			12 foot cable			HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz			
						B-5m Chamber					R_001		Average Measurements RBW=1MHz ; VBW=10Hz			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	Duty Cycle dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
<b>LO CH (2412MHz)</b>																
1.078	3.0	48.6	40.4	25.6	3.3	-39.4	0.0	0.0	38.2	30.0	74	54	-35.8	-24.0	V	
1.188	3.0	51.5	46.1	25.9	3.5	-39.2	0.0	0.0	41.7	36.2	74	54	-32.3	-17.8	V	
4.824	3.0	49.7	38.6	33.0	7.1	-36.5	-4.4	0.0	53.3	37.8	74	54	-20.7	-16.2	V	
7.236	3.0	42.6	30.3	35.4	8.6	-36.2	-4.4	0.0	50.4	33.7	74	54	-23.6	-20.3	V	
1.078	3.0	48.5	38.9	25.6	3.3	-39.4	0.0	0.0	38.1	28.5	74	54	-35.9	-25.5	H	
1.188	3.0	49.3	42.9	25.9	3.5	-39.2	0.0	0.0	39.5	33.1	74	54	-34.5	-20.9	H	
4.824	3.0	56.6	44.6	33.0	7.1	-36.5	-4.4	0.0	60.3	43.8	74	54	-13.7	-10.2	H	
7.236	3.0	43.1	31.6	35.4	8.6	-36.2	-4.4	0.0	50.9	34.9	74	54	-23.1	-19.1	H	
<b>MID CH (2437MHz)</b>																
1.078	3.0	49.4	41.1	25.6	3.3	-39.4	0.0	0.0	38.9	30.7	74	54	-35.1	-23.3	V	
1.188	3.0	50.8	45.2	25.9	3.5	-39.2	0.0	0.0	40.9	35.3	74	54	-33.1	-18.7	V	
4.874	3.0	52.1	41.4	33.1	7.2	-36.5	-4.4	0.0	55.9	40.7	74	54	-18.1	-13.3	V	
7.311	3.0	43.5	31.9	35.5	8.6	-36.2	-4.4	0.0	51.4	35.4	74	54	-22.6	-18.6	V	
1.078	3.0	48.2	39.0	25.6	3.3	-39.4	0.0	0.0	37.8	28.6	74	54	-36.2	-25.4	H	
1.188	3.0	50.2	43.1	25.9	3.5	-39.2	0.0	0.0	40.4	33.2	74	54	-33.6	-20.8	H	
4.874	3.0	60.1	47.0	33.1	7.2	-36.5	-4.4	0.0	63.8	46.3	74	54	-10.2	-7.7	H	
7.311	3.0	43.3	32.2	35.5	8.6	-36.2	-4.4	0.0	51.2	35.7	74	54	-22.8	-18.3	H	
<b>HI CH (2462MHz)</b>																
1.078	3.0	49.7	41.4	25.6	3.3	-39.4	0.0	0.0	39.3	31.0	74	54	-34.7	-23.0	V	
1.188	3.0	50.6	41.4	25.9	3.5	-39.2	0.0	0.0	40.7	31.6	74	54	-33.3	-22.4	V	
4.924	3.0	52.3	41.4	33.1	7.2	-36.5	-4.4	0.0	56.1	40.8	74	54	-17.9	-13.2	V	
7.386	3.0	42.5	29.9	35.6	8.7	-36.2	-4.4	0.0	50.5	33.4	74	54	-23.5	-20.6	V	
1.078	3.0	49.3	40.0	25.6	3.3	-39.4	0.0	0.0	38.8	29.6	74	54	-35.2	-24.4	H	
1.188	3.0	50.2	43.2	25.9	3.5	-39.2	0.0	0.0	40.4	33.4	74	54	-33.6	-20.6	H	
4.924	3.0	60.9	47.5	33.1	7.2	-36.5	-4.4	0.0	64.7	46.9	74	54	-9.3	-7.1	H	
7.386	3.0	44.4	32.2	35.6	8.7	-36.2	-4.4	0.0	52.5	35.8	74	54	-21.5	-18.2	H	
Rev. 4.12.7																
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

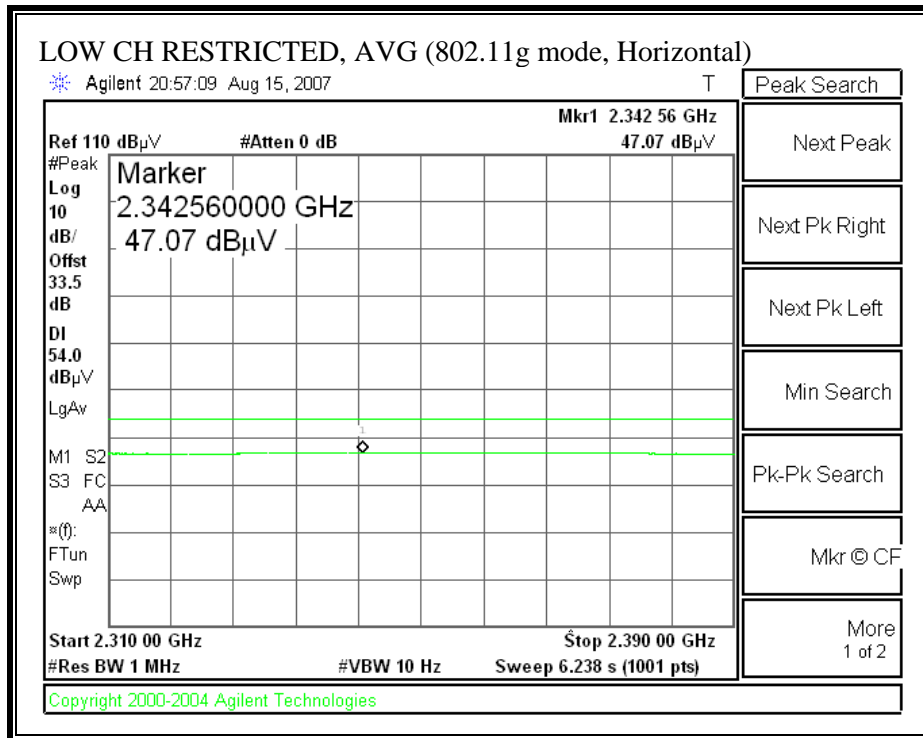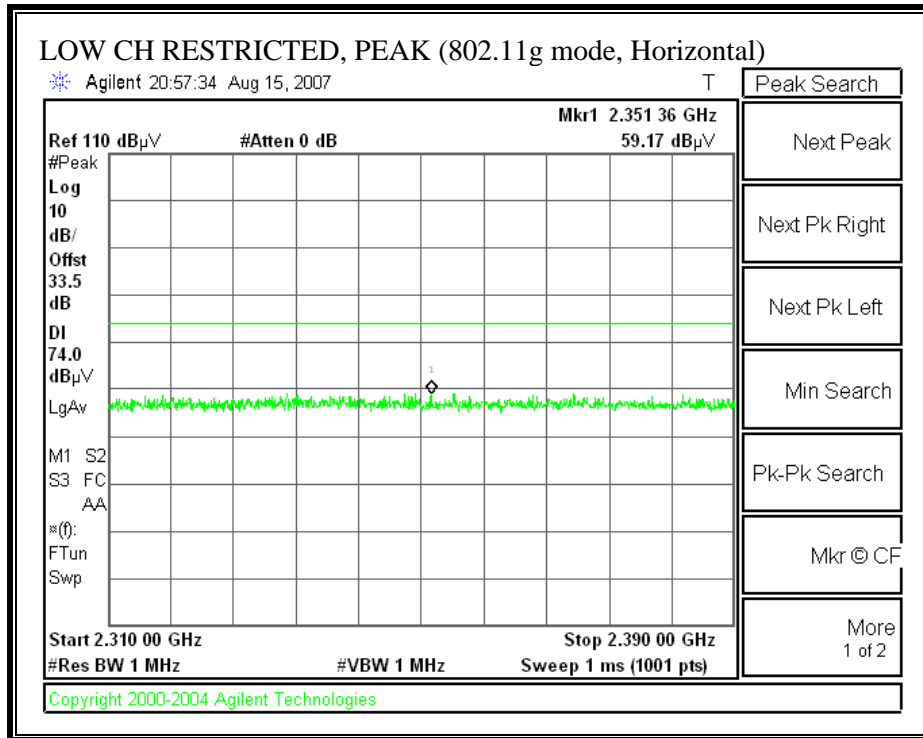



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

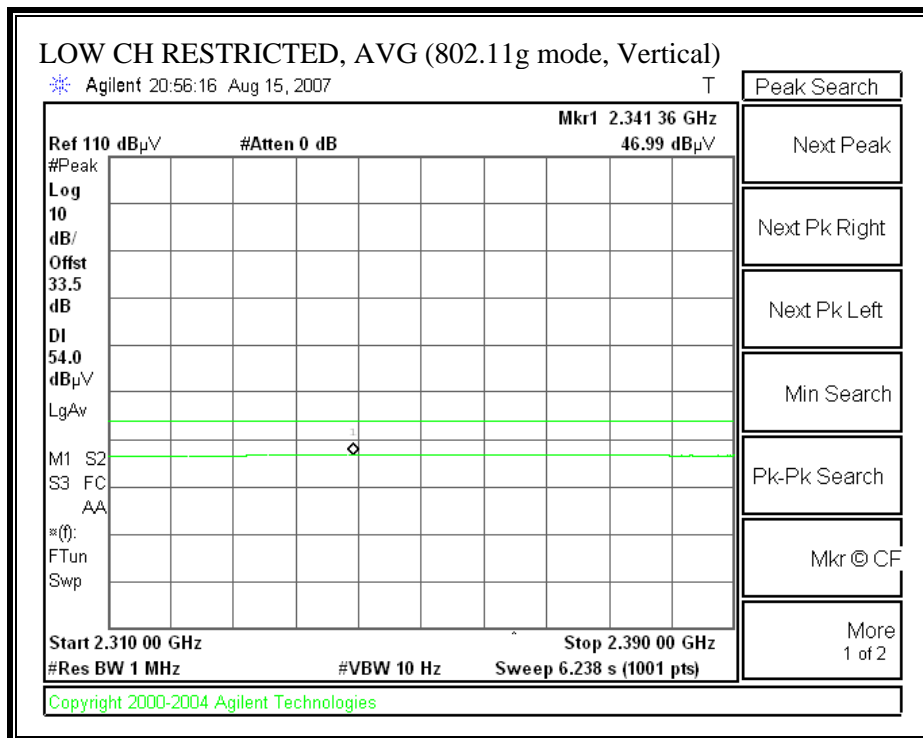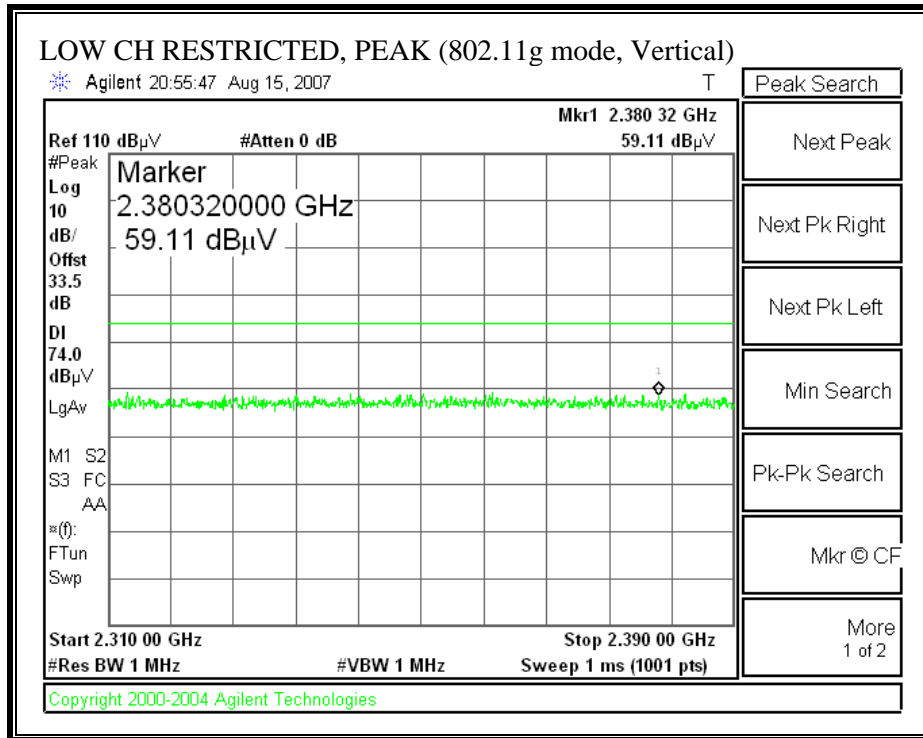

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

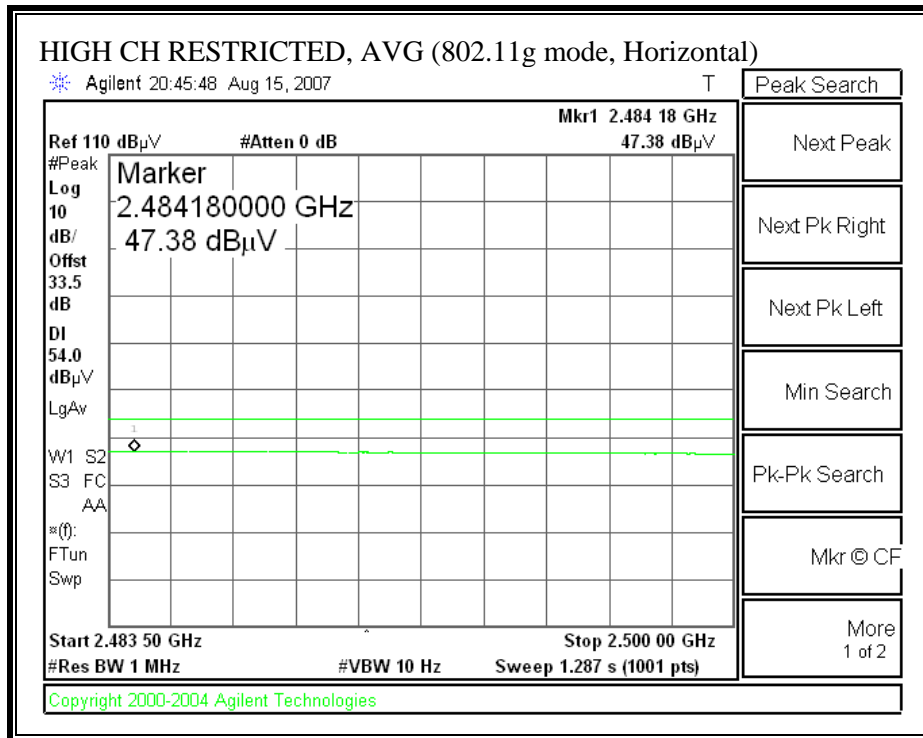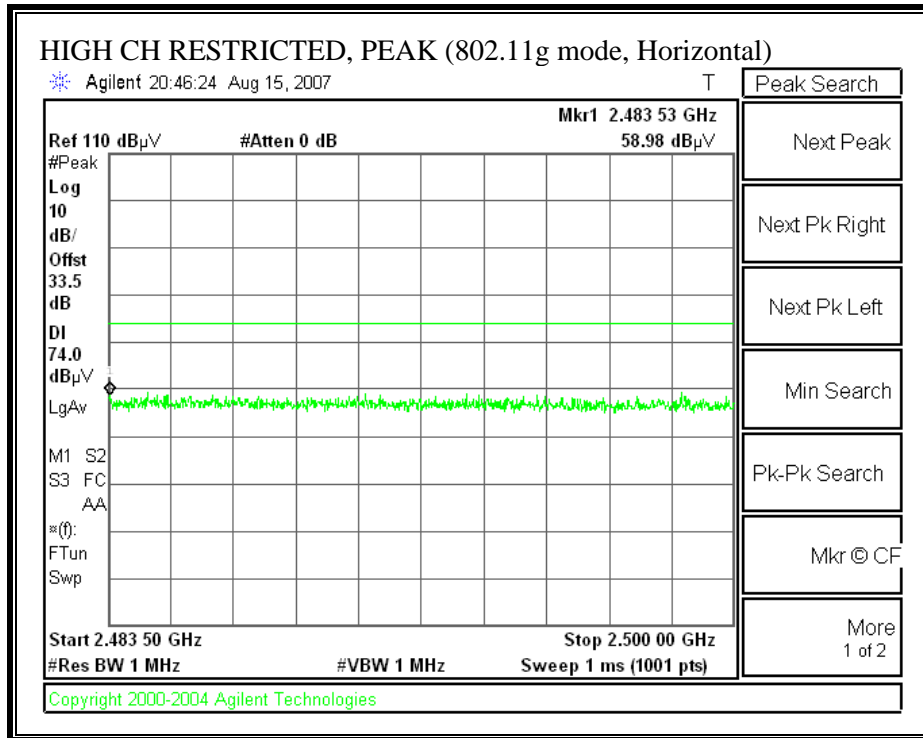

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

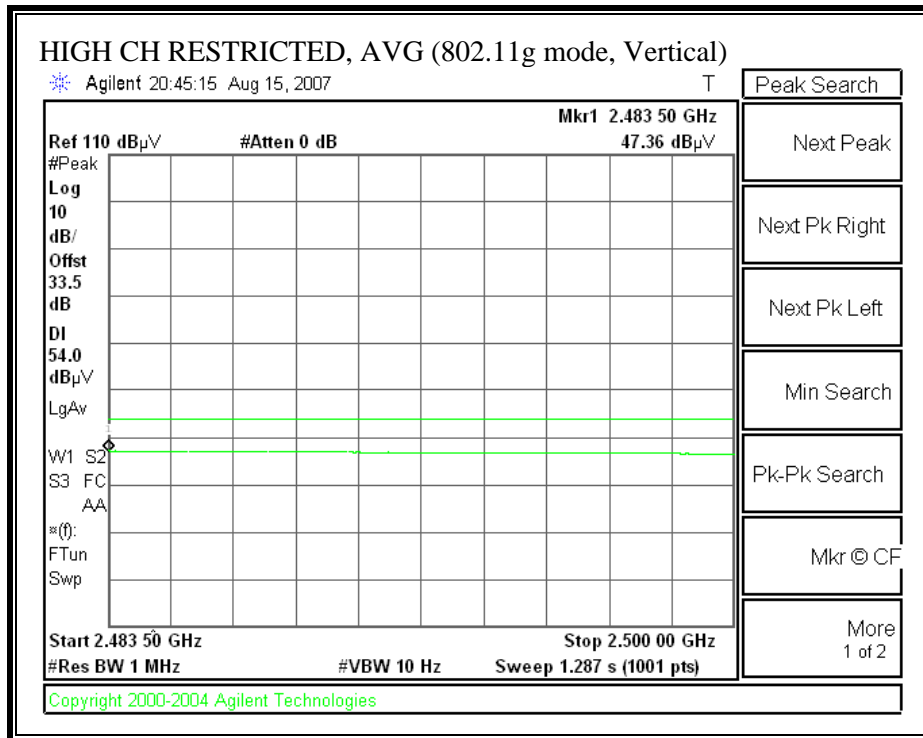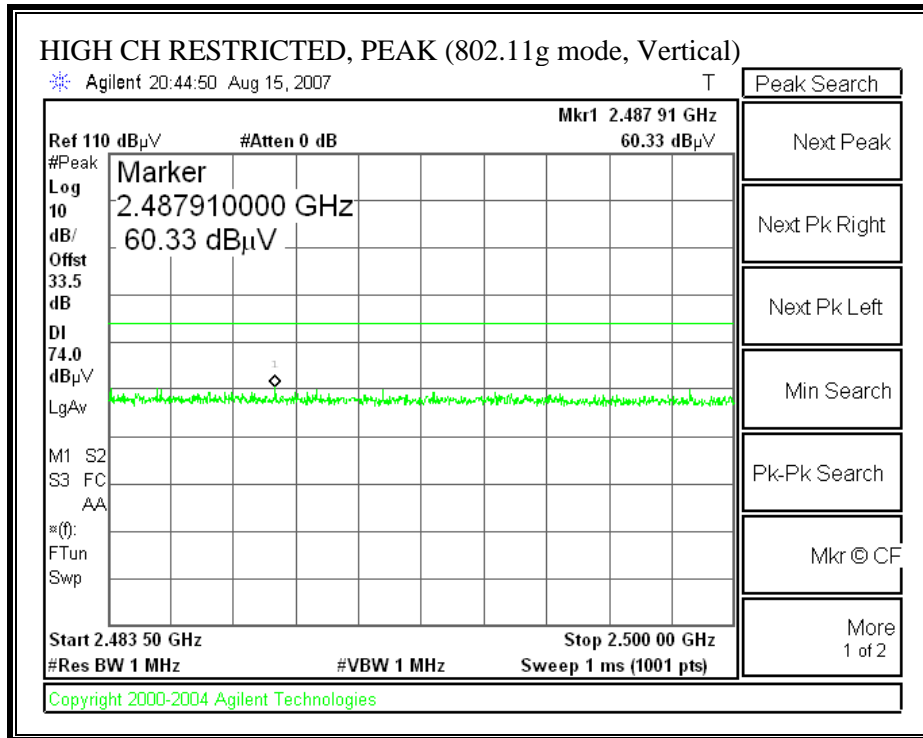



**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

**High Frequency Measurement**  
 Compliance Certification Services, Fremont 5m Chamber

Company: Microsoft  
 Project #: 07U11225  
 Date: 09/04/07  
 Test Engineer: Devin Chang  
 Configuration: EUT only  
 Mode: G Mode-TX  
 Model: 1124 and 1125

**Test Equipment:**

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T144 Miteq 3008A00931			FCC 15.209

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
		B-5m Chamber		R_001	Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>LO CH (2412MHz)</b>															
1.188	3.0	51.8	46.7	25.9	3.5	-39.2	0.0	0.0	41.9	36.8	74	54	-32.1	-17.2	V
4.824	3.0	45.8	30.9	33.0	7.1	-36.5	-4.4	0.0	49.5	30.1	74	54	-24.5	-23.9	V
1.188	3.0	48.7	41.4	25.9	3.5	-39.2	0.0	0.0	38.8	31.6	74	54	-35.2	-22.4	H
4.824	3.0	54.1	36.2	33.0	7.1	-36.5	-4.4	0.0	57.8	35.4	74	54	-16.2	-18.6	H
<b>MID CH (2437MHz)</b>															
1.188	3.0	50.8	45.6	25.9	3.5	-39.2	0.0	0.0	40.9	35.8	74	54	-33.1	-18.2	V
4.874	3.0	46.8	31.5	33.1	7.2	-36.5	-4.4	0.0	50.5	30.8	74	54	-23.5	-23.2	V
1.188	3.0	48.9	41.3	25.9	3.5	-39.2	0.0	0.0	39.0	31.5	74	54	-35.0	-22.5	H
4.874	3.0	56.0	37.4	33.1	7.2	-36.5	-4.4	0.0	59.8	36.7	74	54	-14.2	-17.3	H
<b>HI CH (2462MHz)</b>															
1.188	3.0	50.2	45.8	25.9	3.5	-39.2	0.0	0.0	40.3	35.9	74	54	-33.7	-18.1	V
4.924	3.0	48.8	32.7	33.1	7.2	-36.5	-4.4	0.0	52.7	32.0	74	54	-21.3	-22.0	V
1.188	3.0	49.1	41.7	25.9	3.5	-39.2	0.0	0.0	39.3	31.8	74	54	-34.7	-22.2	H
4.924	3.0	57.9	39.5	33.1	7.2	-36.5	-4.4	0.0	61.7	38.9	74	54	-12.3	-15.1	H

Rev. 4.12.7


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

**HARMONICS AND SPURIOUS EMISSIONS (RX MODE)**


High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber																	
Company: Microsoft Project #: 07U11225 Date: 09/04/07 Test Engineer: Devin Chang Configuration: EUT Mode: RX Worst case Mode Model: 1124 and 1125																	
<b>Test Equipment:</b>																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T60; S/N: 2238 @3m			T144 Miteq 3008A00931									FCC 15.209					
Hi Frequency Cables																	
2 foot cable			3 foot cable			12 foot cable			HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz				
						B-5m Chamber											
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
<b>HI CH (2462MHz)</b>																	
1.188	3.0	49.9	44.6	25.9	3.5	-39.2	0.0	0.0	40.0	34.8	74	54	-34.0	-19.2	V		
1.716	3.0	49.7	43.6	27.2	4.2	-38.5	0.0	0.0	42.7	36.5	74	54	-31.3	-17.5	V		
1.188	3.0	49.2	43.5	25.9	3.5	-39.2	0.0	0.0	39.4	33.7	74	54	-34.6	-20.3	H		
1.716	3.0	49.7	43.4	27.2	4.2	-38.5	0.0	0.0	42.7	36.3	74	54	-31.3	-17.7	H		
Rev. 4.12.7																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

**7.2.2. RADIATED EMISSIONS BELOW 1 GHz**


**SPURIOUS EMISSIONS 30 TO 1000 MHz (PHIHONG ADAPTOR, HORIZONTAL)**

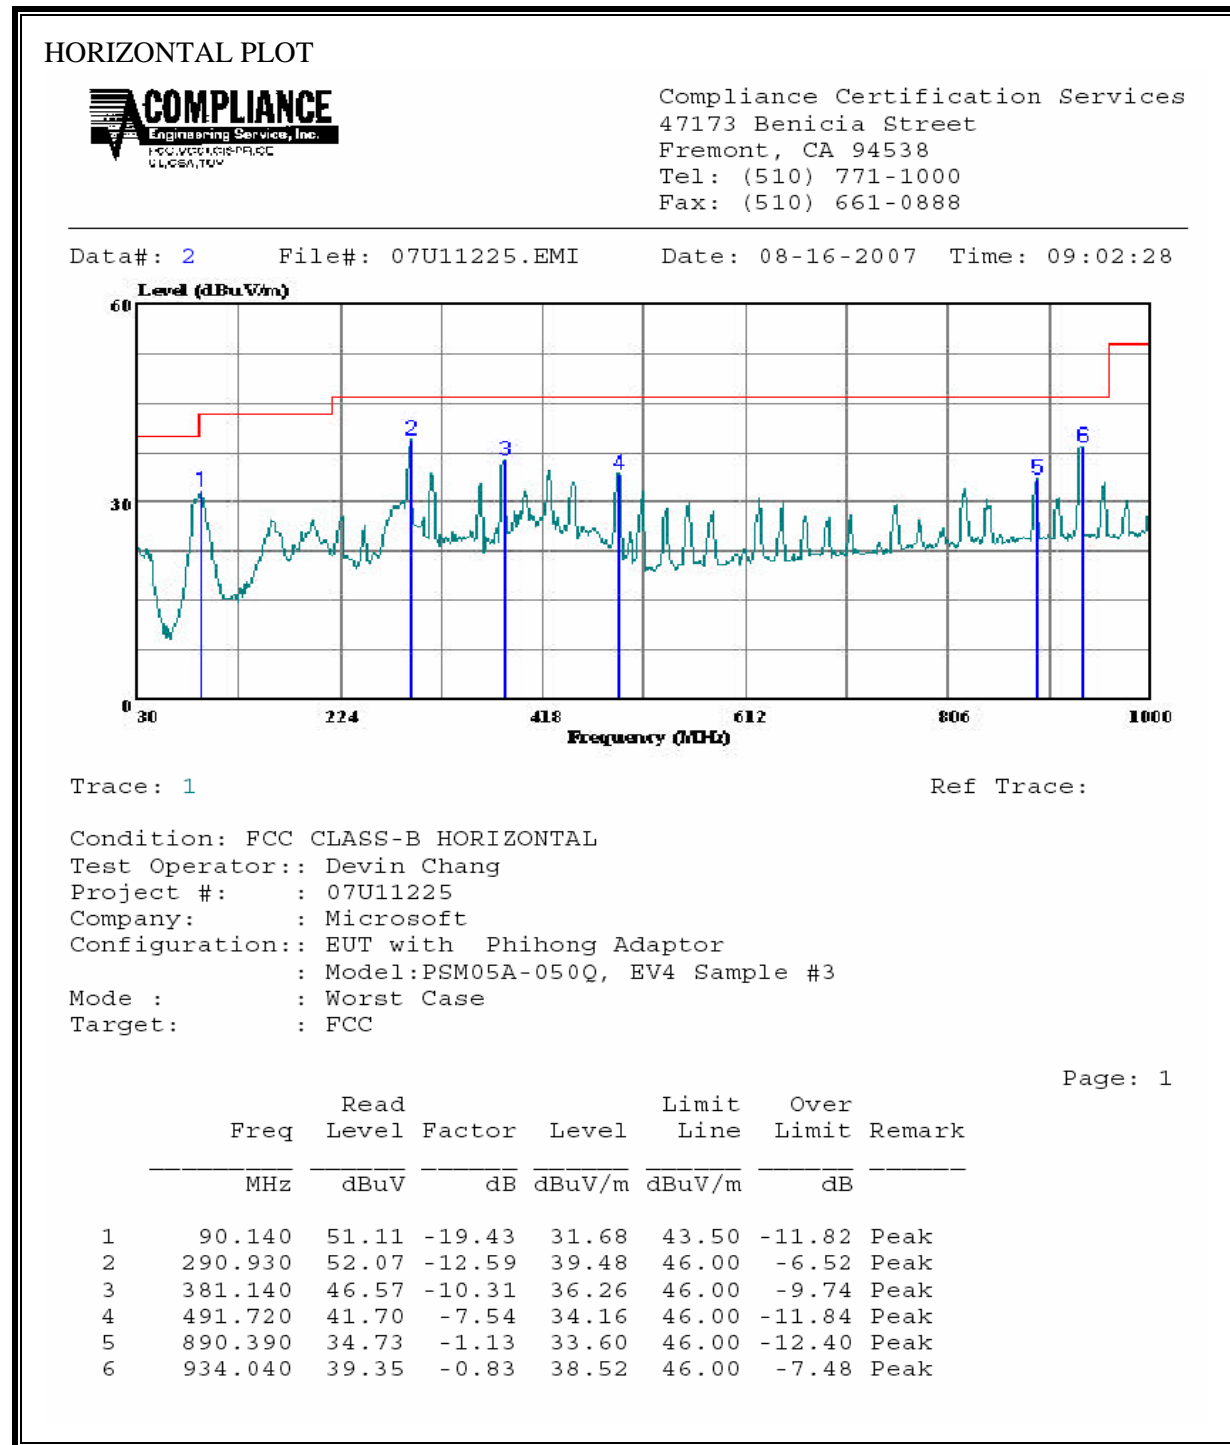


**SPURIOUS EMISSIONS 30 TO 1000 MHz (PHIHONG ADAPTOR, VERTICAL)**

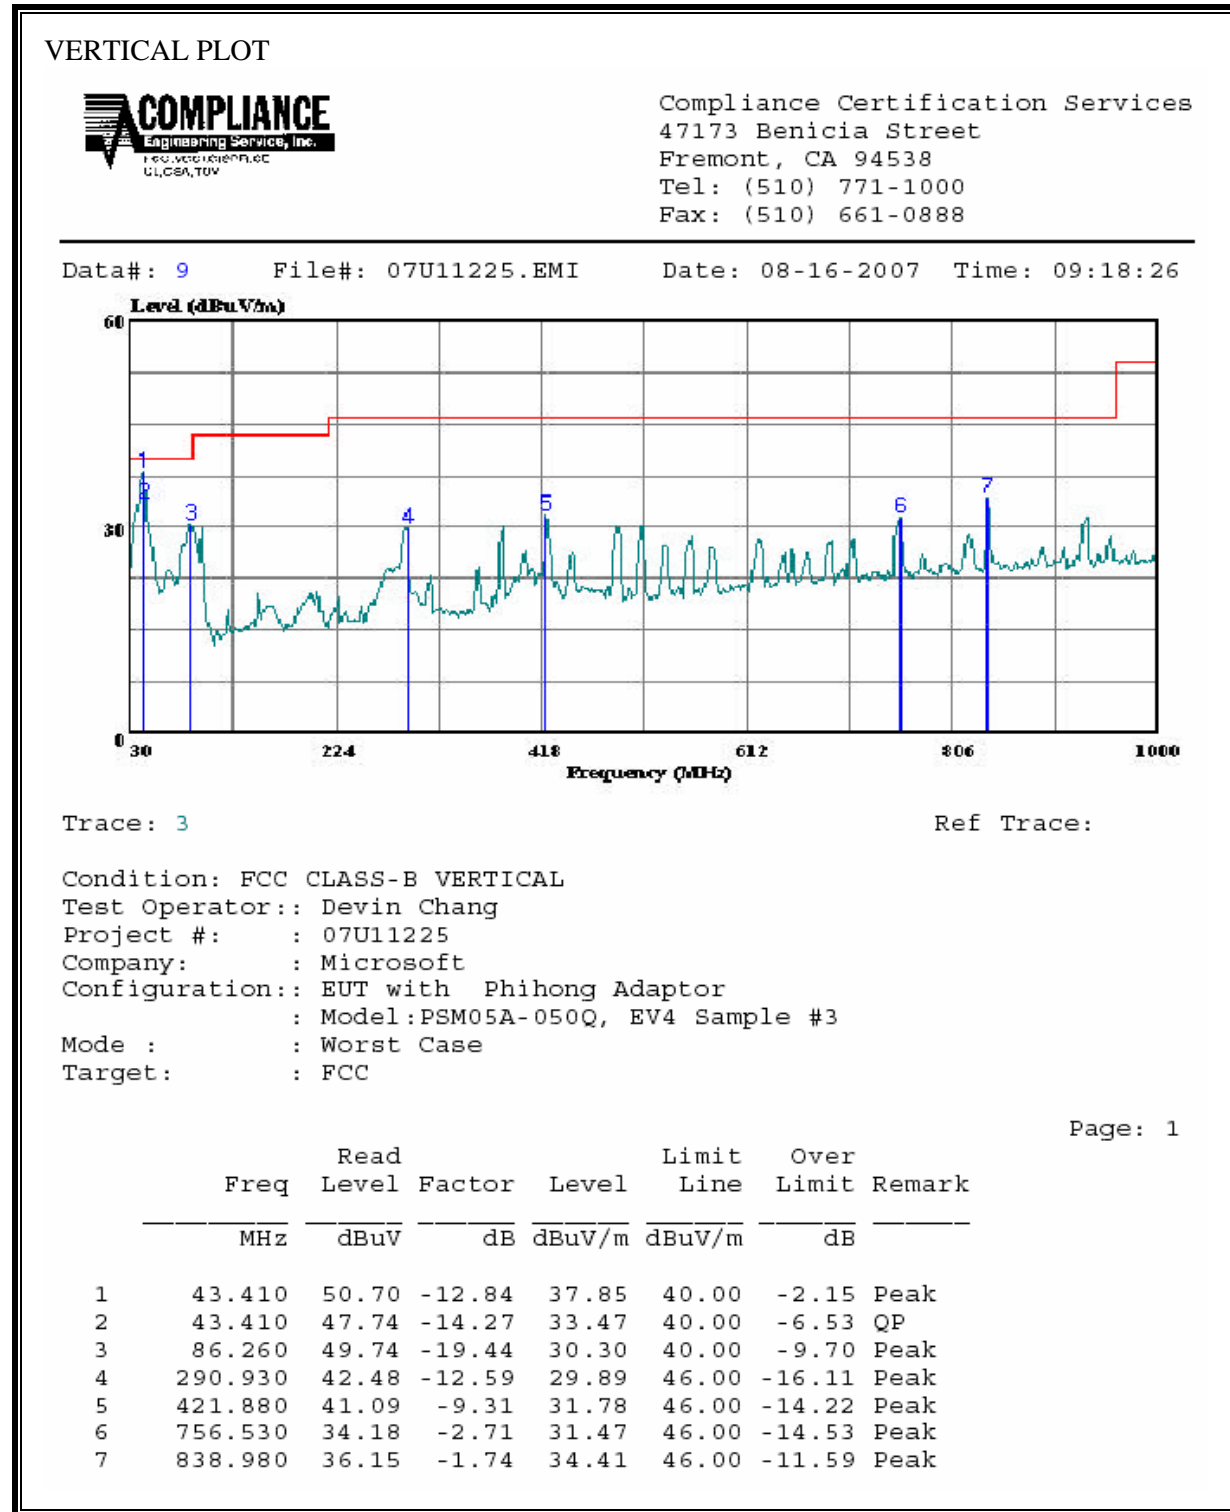

**SPURIOUS EMISSIONS 30 TO 1000 MHz (DELTA ADAPTOR, HORIZONTAL)**

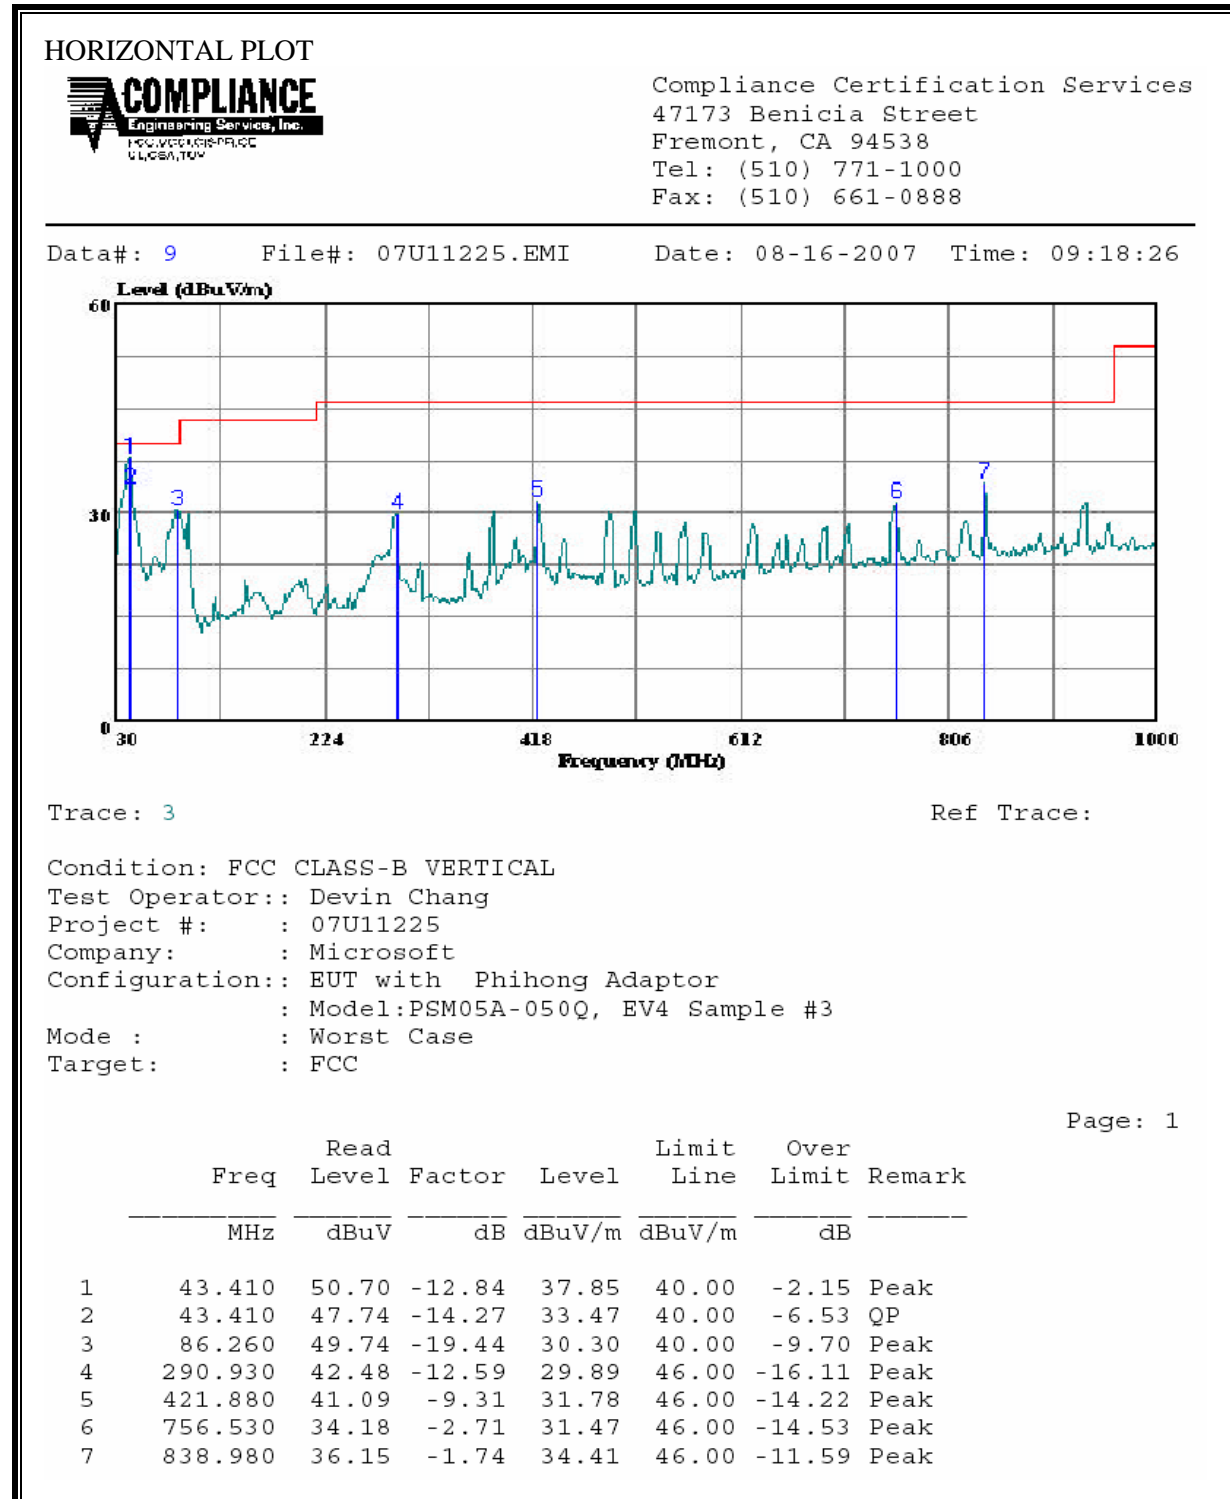

**SPURIOUS EMISSIONS 30 TO 1000 MHz (DELTA ADAPTOR, VERTICAL)**

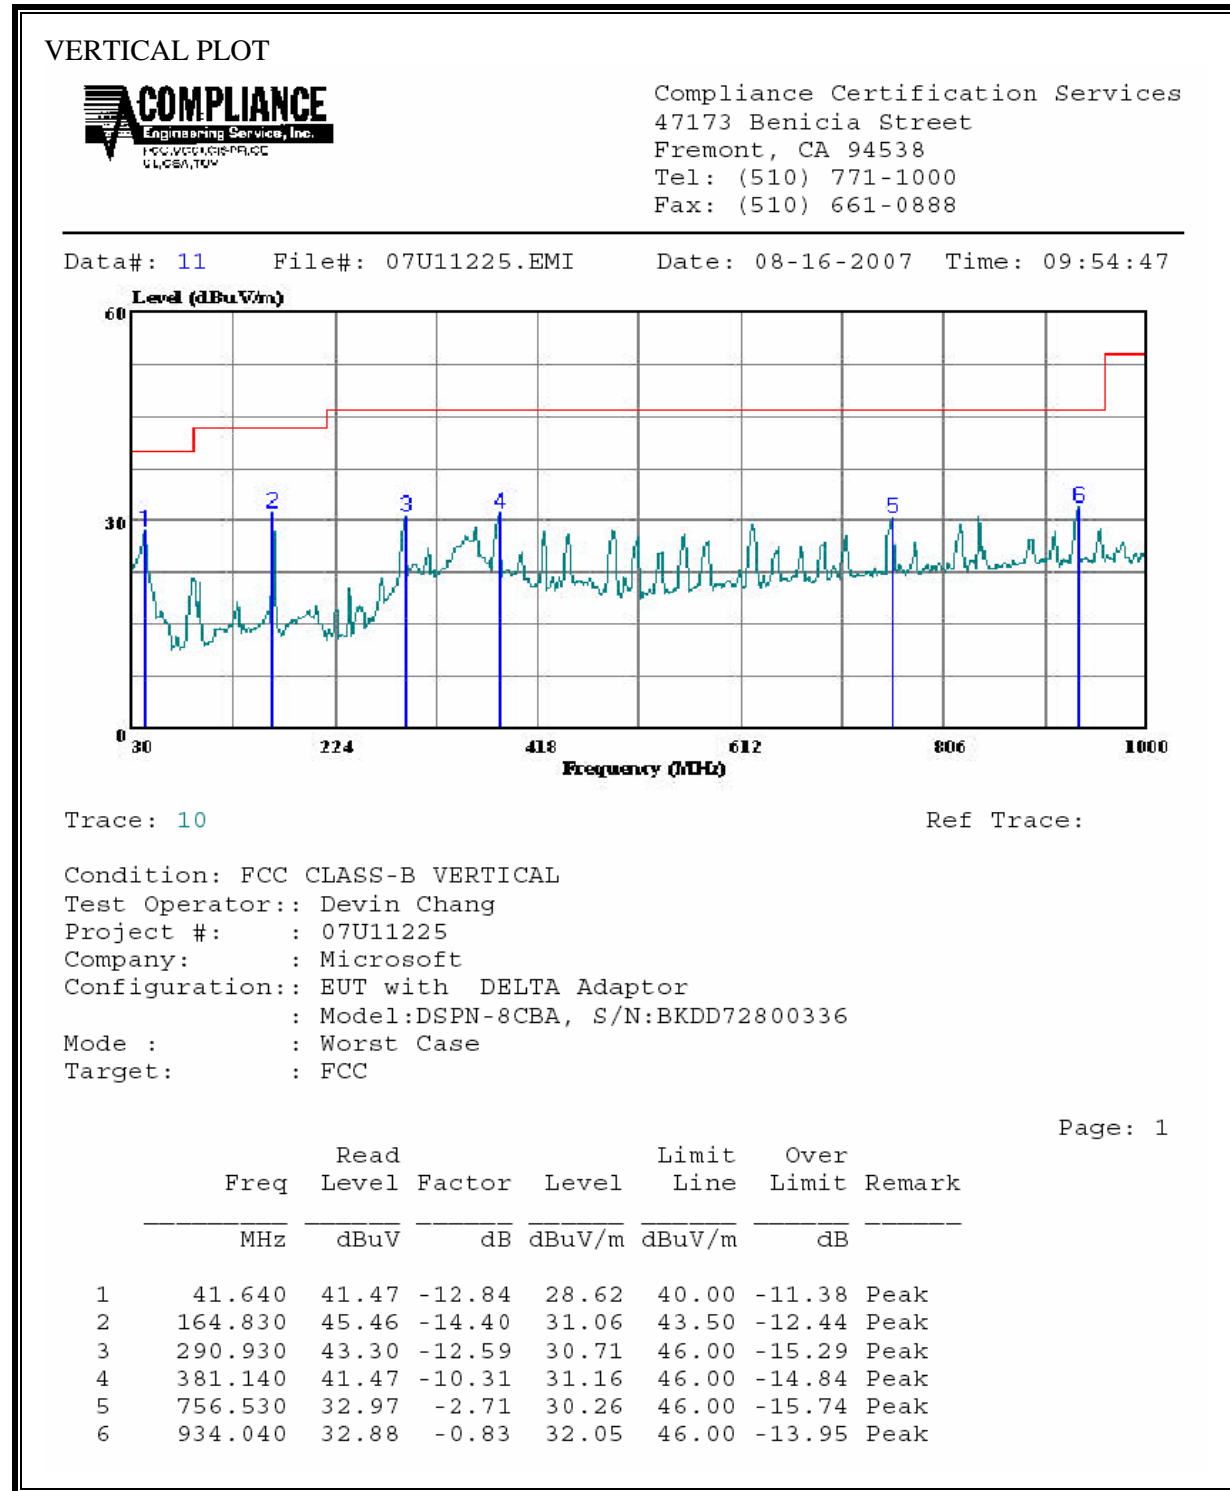


**SPURIOUS EMISSIONS 30 TO 1000 MHz (EUT WITH NOTEBOOK, HORIZONTAL)**

HORIZONTAL PLOT



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 15 File#: 07U11225.EMI Date: 08-16-2007 Time: 10:31:36

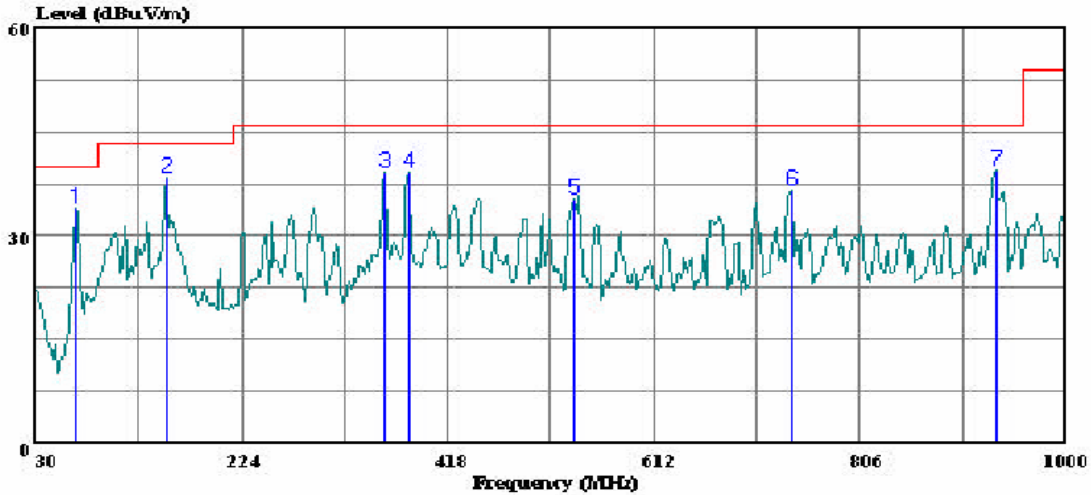

Trace: 14


Ref Trace:

Condition: FCC CLASS-B HORIZONTAL  
 Test Operator:: Devin Chang  
 Project #: : 07U11225  
 Company: : Microsoft  
 Configuration:: EUT with HP Notebook  
 : Model:ADP-75HB, S/N:MVT024001165081  
 Mode : : Worst Case  
 Target: : FCC

Page: 1

	Read	Read	Limit	Over		
-----	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	67.830	53.36	-19.24	34.12	40.00	-5.88 Peak
2	153.190	52.42	-14.00	38.42	43.50	-5.08 Peak
3	358.830	49.90	-10.78	39.12	46.00	-6.88 Peak
4	381.140	49.64	-10.31	39.33	46.00	-6.67 Peak
5	536.340	41.95	-6.67	35.28	46.00	-10.72 Peak
6	741.980	39.47	-2.85	36.62	46.00	-9.38 Peak
7	934.040	40.33	-0.83	39.50	46.00	-6.50 Peak

**SPURIOUS EMISSIONS 30 TO 1000 MHz (EUT WITH NOTEBOOK, VERTICAL)**

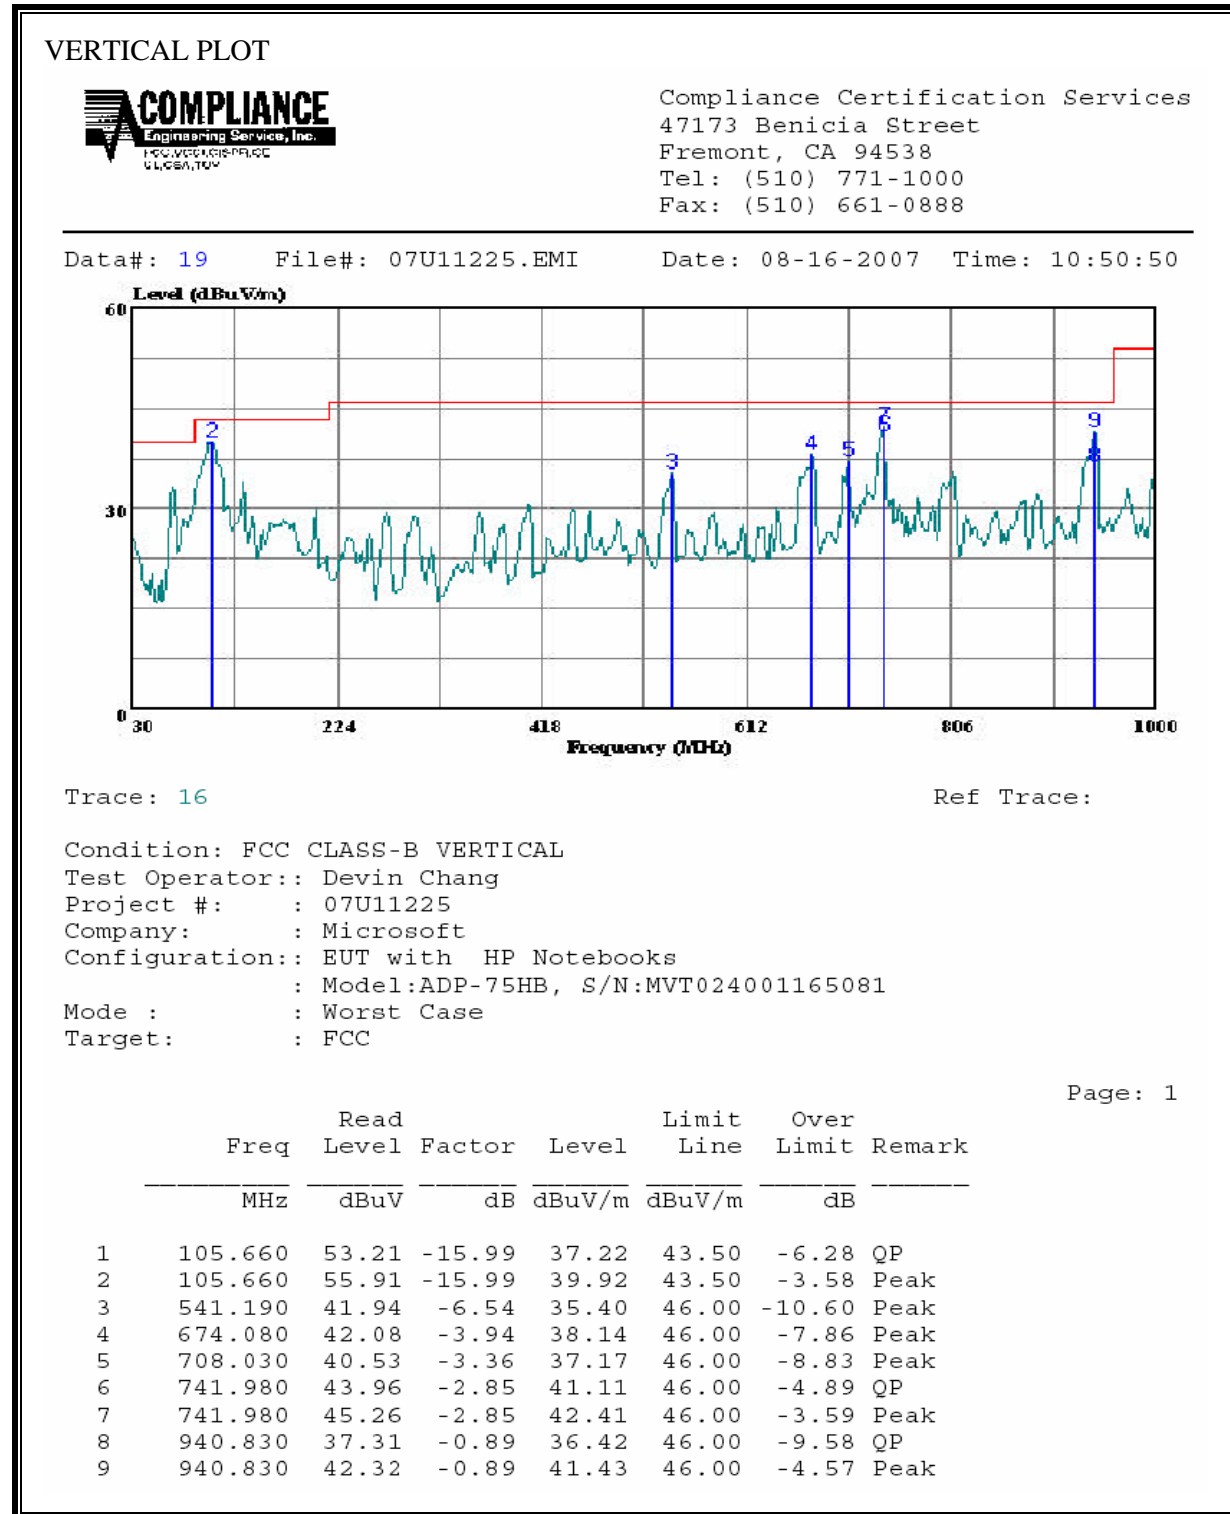



### 7.3. POWERLINE CONDUCTED EMISSIONS

#### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

#### RESULTS


No non-compliance noted.

**6 WORST EMISSIONS**


PHIHONG ADAPTOR

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Class	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.16	48.59	--	37.49	0.00	65.52	55.52	-16.93	-18.03	L1
0.32	40.31	--	34.05	0.00	59.71	49.71	-19.40	-15.66	L1
2.65	42.56	--	23.80	0.00	56.00	46.00	-13.44	-22.20	L1
0.16	50.49	--	45.01	0.00	65.52	55.52	-15.03	-10.51	L2
0.28	46.86	--	33.18	0.00	60.82	50.82	-13.96	-17.64	L2
2.54	42.69	--	25.33	0.00	56.00	46.00	-13.31	-20.67	L2
6 Worst Data									

**LINE 1 RESULTS**

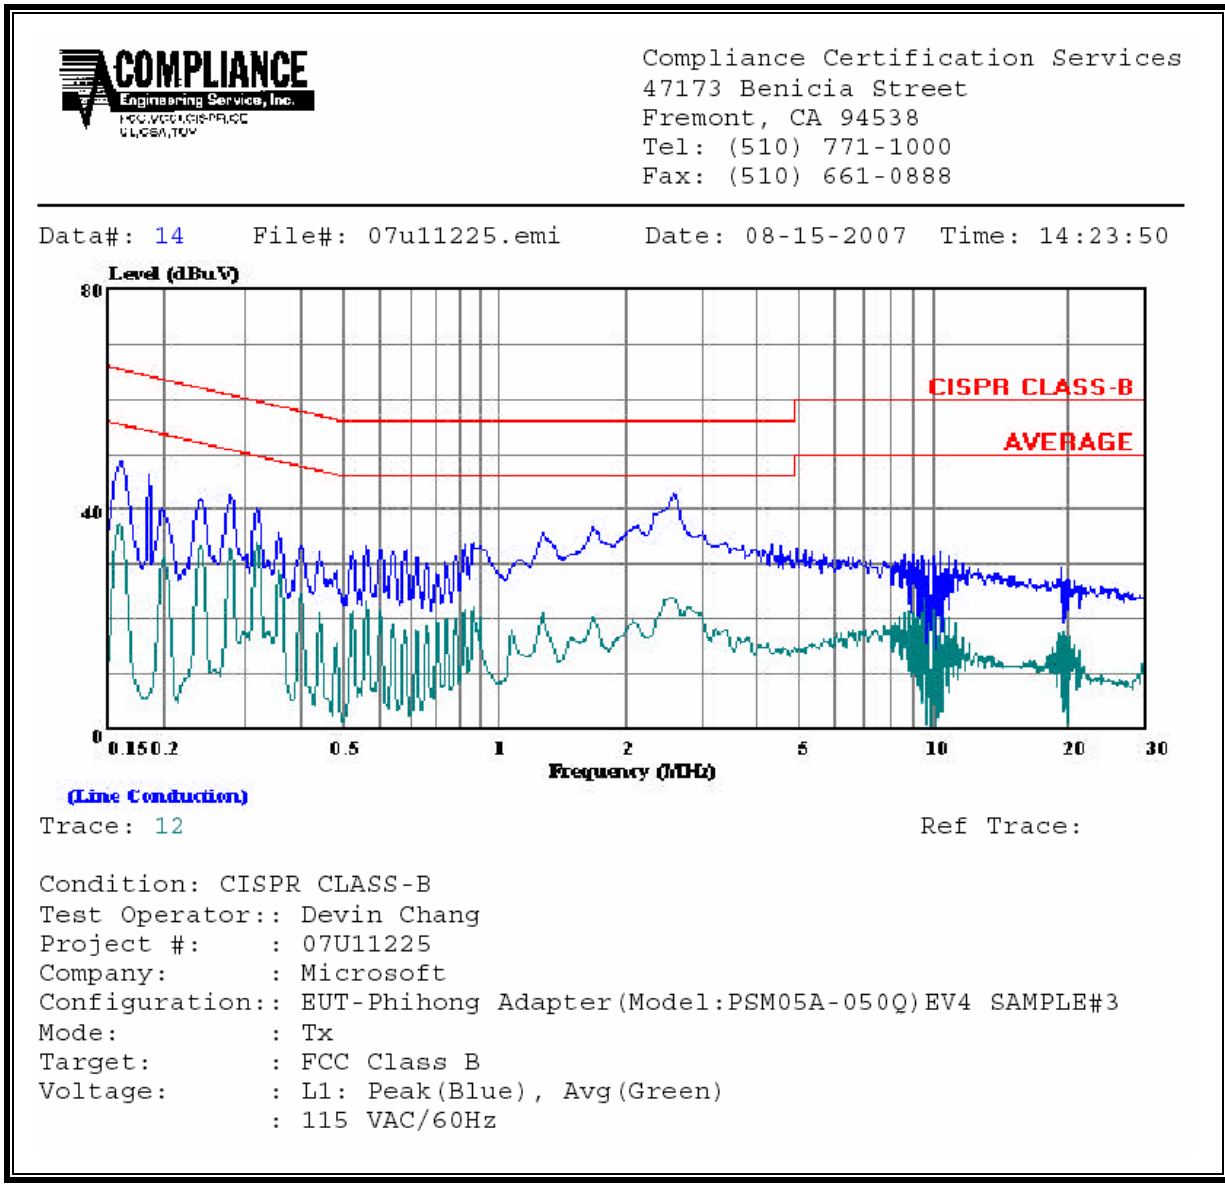


**LINE 2 RESULTS**

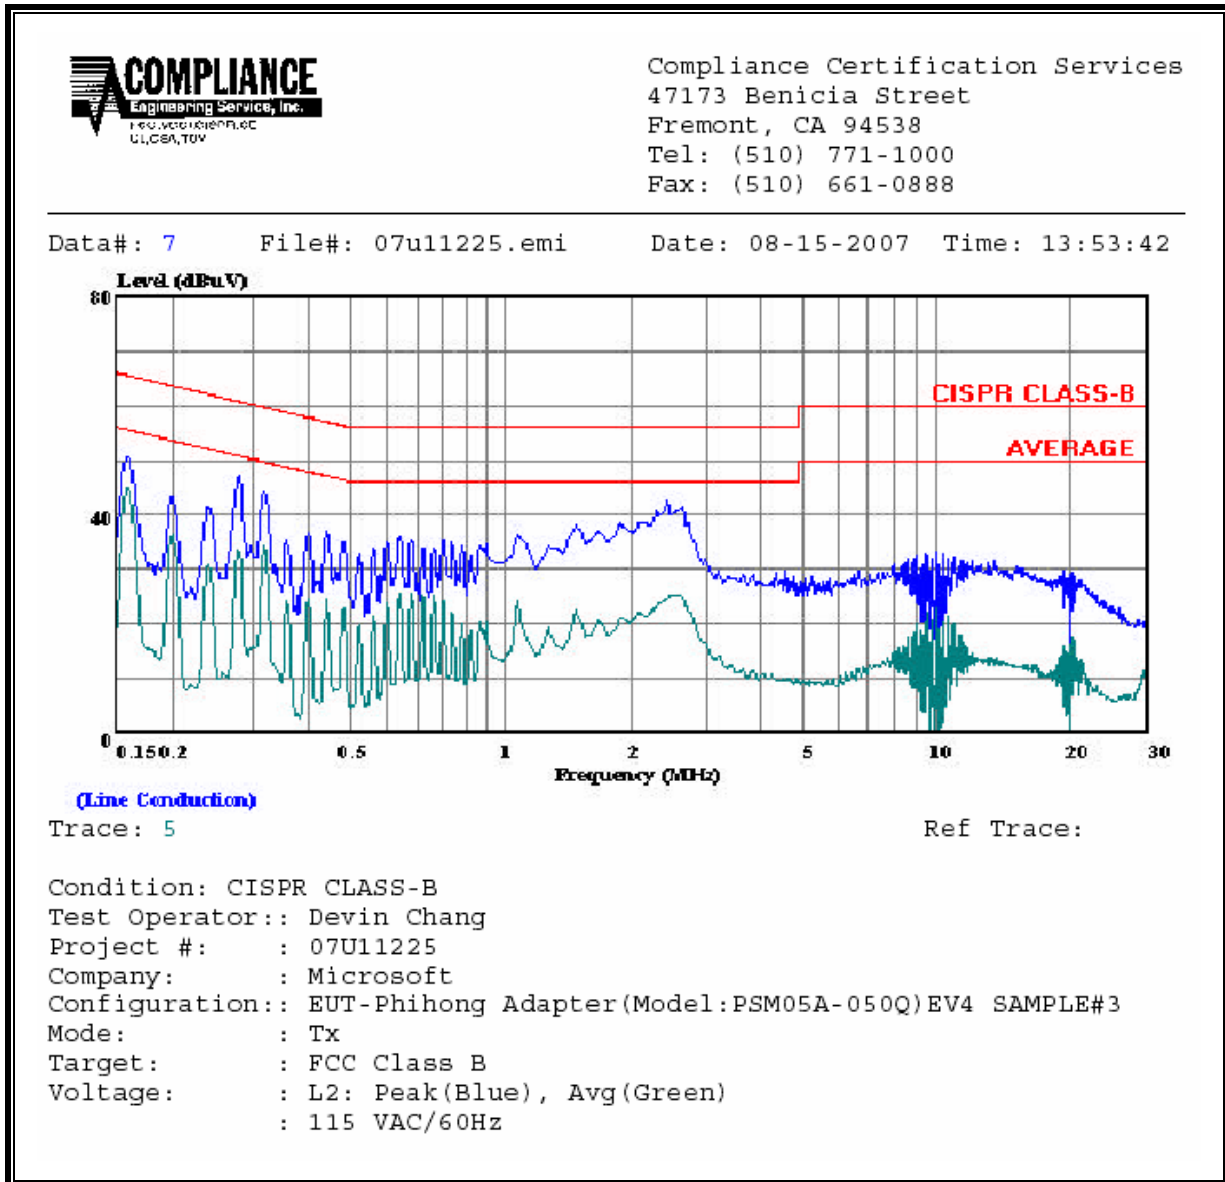


DETLA ADAPTOR

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class (dB)	Limit QP	FCC B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.18	53.92	--	42.56	0.00	64.39	54.39	-10.47	-11.83	L1	
0.50	41.13	--	30.49	0.00	56.02	46.02	-14.89	-15.53	L1	
5.51	39.36	--	29.99	0.00	60.00	50.00	-20.64	-20.01	L1	
0.20	55.95	--	43.46	0.00	63.69	53.69	-7.74	-10.23	L2	
0.26	45.19	--	32.22	0.00	61.37	51.37	-16.18	-19.15	L2	
5.08	41.72	--	29.29	0.00	60.00	50.00	-18.28	-20.71	L2	
6 Worst Data										

**LINE 1 RESULTS**

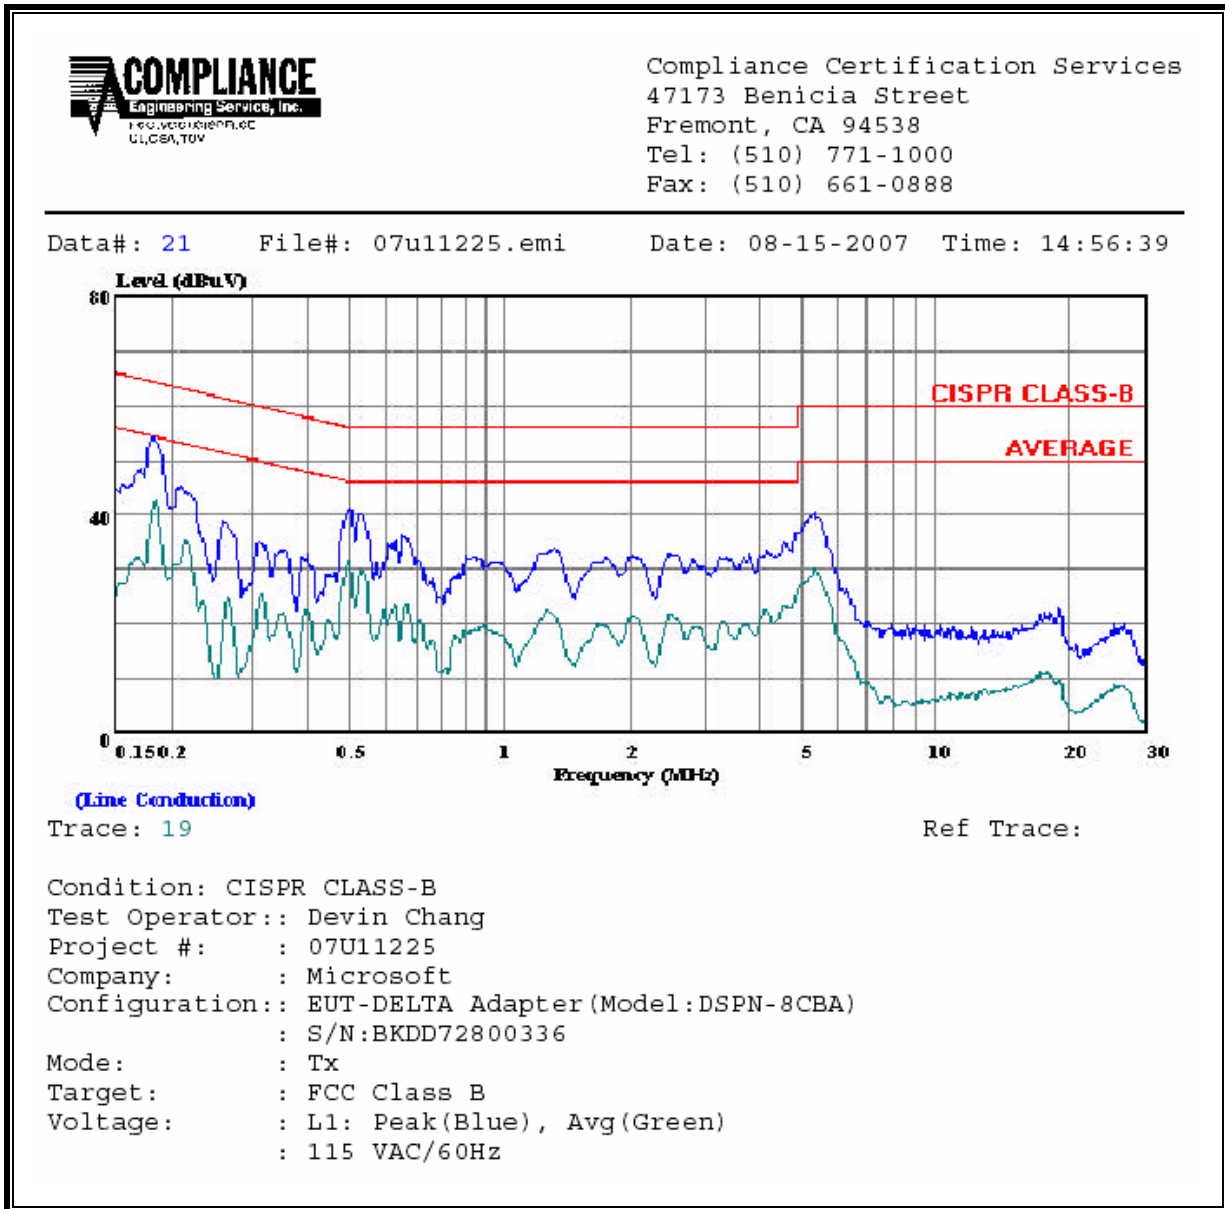

**LINE 2 RESULTS**

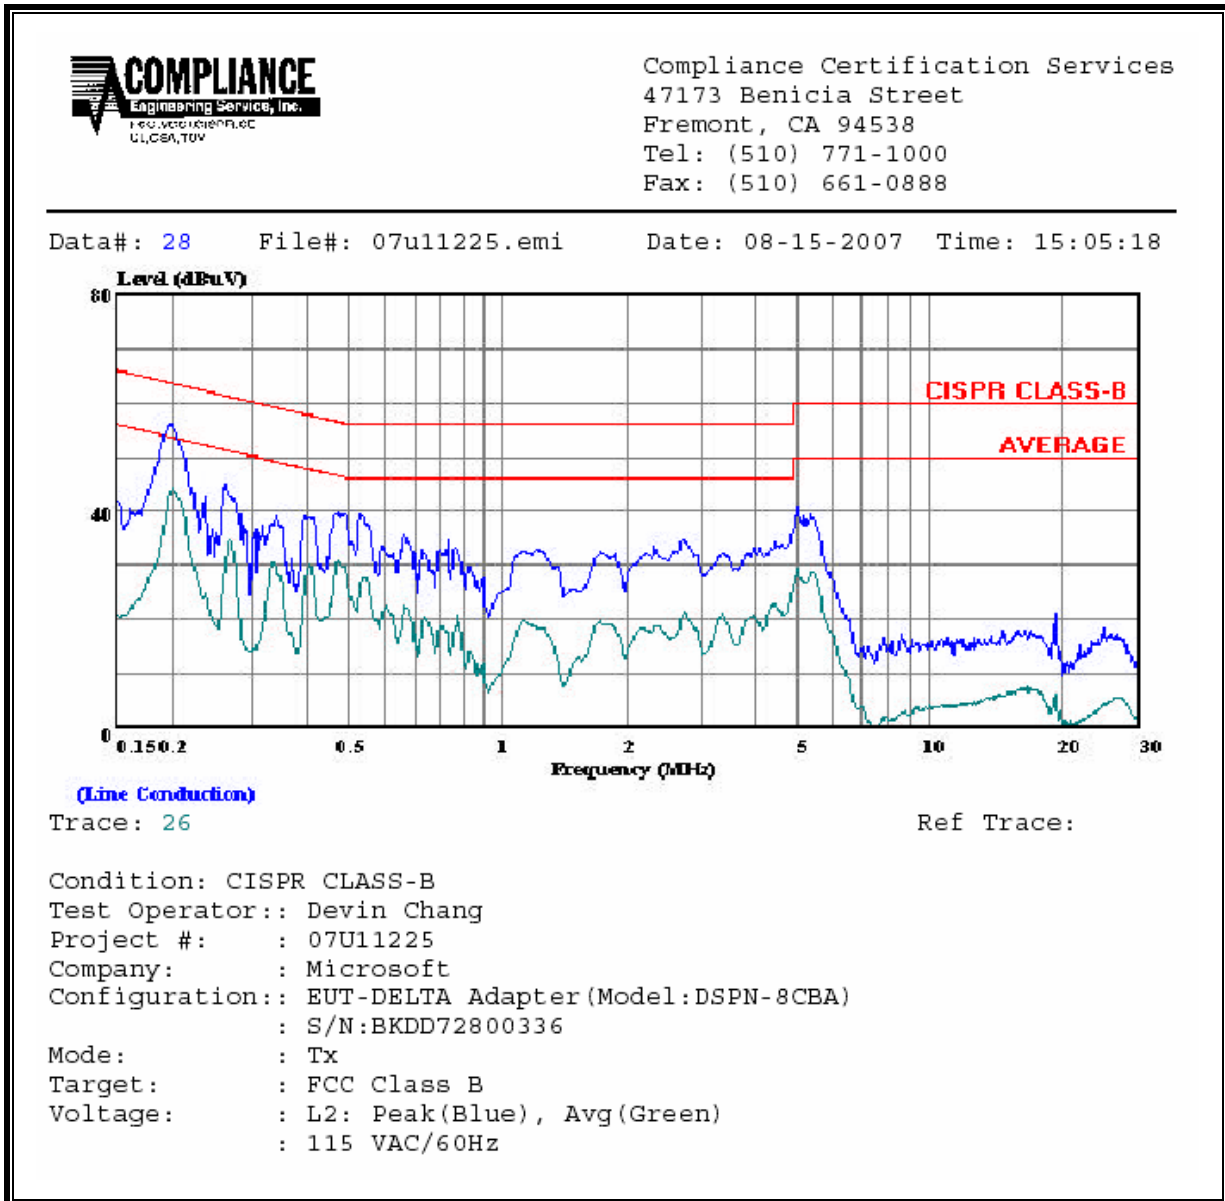


EUT WITH NOTEBOOK


CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class (dB)	Limit QP	FCC B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.19	35.37	--	4.64	0.00	63.99	53.99	-28.62	-49.35	L1	
15.97	30.78	--	15.60	0.00	60.00	50.00	-29.22	-34.40	L1	
19.22	42.93	--	28.00	0.00	60.00	50.00	-17.07	-22.00	L1	
0.20	55.63	--	33.90	0.00	63.53	53.53	-7.90	-19.63	L2	
4.38	33.43	--	24.28	0.00	56.00	46.00	-22.57	-21.72	L2	
19.33	40.41	--	24.84	0.00	60.00	50.00	-19.59	-25.16	L2	
6 Worst Data										



**LINE 1 RESULTS**

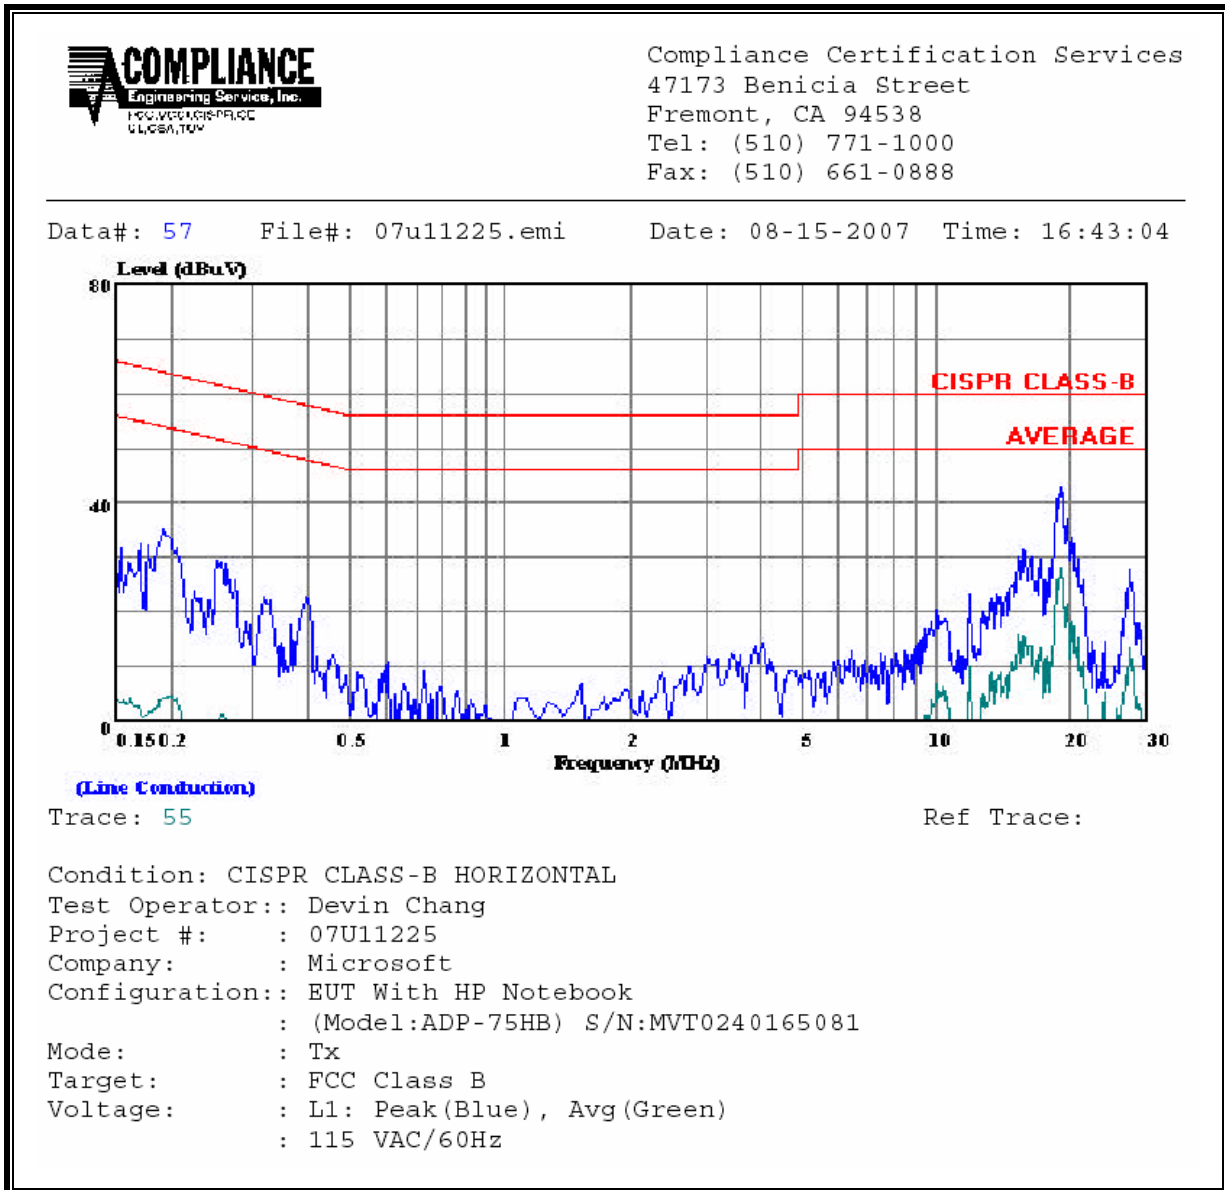

**LINE 2 RESULTS**

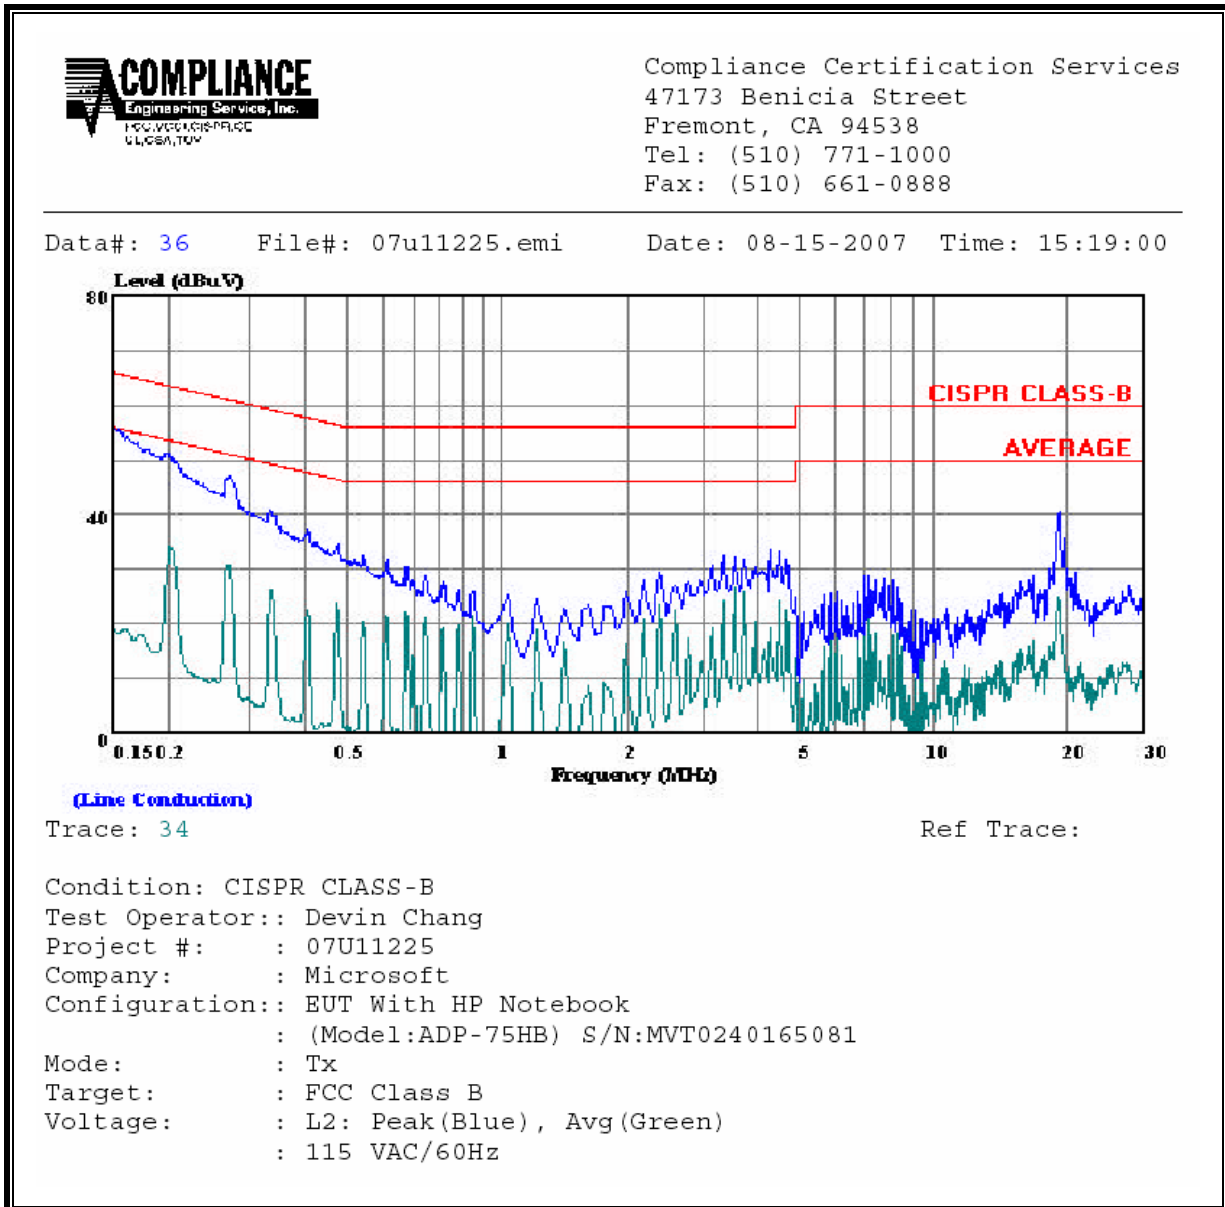

### 7.4. MAXIMUM PERMISSIBLE EXPOSURE

#### FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**IC RULES**

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5  
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m <sup>2</sup> )	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> <sup>0.5</sup>	0.0042 <i>f</i> <sup>0.5</sup>	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> <sup>1.2</sup>
150 000–300 000	0.158 <i>f</i> <sup>0.5</sup>	4.21 x 10 <sup>-4</sup> <i>f</i> <sup>0.5</sup>	6.67 x 10 <sup>-5</sup> <i>f</i>	616 000 / <i>f</i> <sup>1.2</sup>

\* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
  2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.
  3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

## CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm<sup>2</sup> is converted to units of W/m<sup>2</sup> by multiplying by a factor of 10.

**LIMITS**

From FCC §1.1310 Table 1 (B), the maximum value of  $S = 1.0 \text{ mW/cm}^2$

From IC Safety Code 6, Section 2.2 Table 5 Column 4,  $S = 10 \text{ W/m}^2$

**RESULTS**

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density ( $\text{mW/cm}^2$ )	IC Power Density ( $\text{W/m}^2$ )
802.11b	2.4 GHz	20.0	13.49	1.00	0.00559	0.06
802.11g	2.4 GHz	20.0	11.39	1.00	0.00345	0.03

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.