

FCC TEST REPORT

REPORT NO.: RF950220A11A

MODEL NO.: 1061

RECEIVED: Feb. 20, 2006

TESTED: Mar. 3 ~ 11, 2006

ISSUED: Mar. 15, 2006

APPLICANT: MICROSOFT CORPORATION

ADDRESS: ONE MICROSOFT WAY REDMOND,
WA 98052-6399, U.S.A

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.1	DESCRIPTION OF TEST MODES.....	6
3.2	CONFIGURATION OF SYSTEM UNDER TEST	6
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST PROCEDURE AND RESULT	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.2	RADIATED EMISSION MEASUREMENT	9
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	9
4.2.2	TEST INSTRUMENT.....	10
4.2.3	TEST PROCEDURE	11
4.2.4	TEST SETUP	12
4.2.5	EUT OPERATING CONDITION	12
4.2.6	TEST RESULT	13
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	22
6	INFORMATION ON THE TESTING LABORATORIES	23
APPENDIX-A	A-1



1 CERTIFICATION

PRODUCT: Microsoft® Wireless Mouse 700
BRAND NAME: Microsoft®
MODEL NO.: 1061
APPLICANT: MICROSOFT CORPORATION
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Mar. 3 ~ 11, 2006
STANDARDS: FCC Part 15, Subpart C (Section 15.227),
ANSI C63.4 -2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** Mar. 15, 2006
(Annie Chang)

TECHNICAL ACCEPTANCE : Ken Liu , **DATE:** Mar. 15, 2006
Responsible for RF (Ken Liu)

APPROVED BY : Gary Chang , **DATE:** Mar. 15, 2006
(Gary Chang / Supervisor)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3Vdc from batteries
15.227 15.209	Radiated Emission Test	PASS	Minimum passing margin is -15.23dB at 959.04MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Uncertainty
Radiated emissions	3.86 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Microsoft® Wireless Mouse 700
MODEL NO.	1061
FCC ID	C3K1061
POWER SUPPLY	3.0Vdc from batteries
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	27.045 MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Integrated antenna with -0.5dBi gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a Wireless Mouse which is a transmitter
2. The EUT has 3 samples, which are defined as their serial no. as follows:

Model No.	Serial no.
1061	04
	05
	06

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.1 DESCRIPTION OF TEST MODES


One channel was provided to this EUT

Channel	Frequency (MHz)
1	27.045MHz

Three sets of identical samples are tested and presented in the report.

Mouse Serial Number
04
05
06

3.2 CONFIGURATION OF SYSTEM UNDER TEST

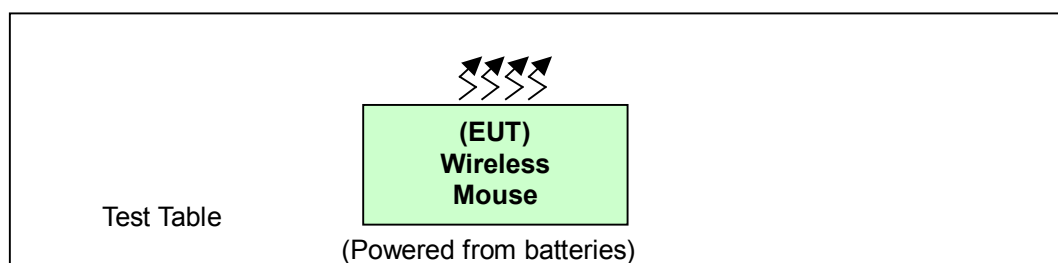

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to		Description
	PLC	RE<1G	
1	Note	√	Mouse serial number: 04 (operating)
2	Note	√	Mouse serial number: 04 (standby)
3	Note	√	Mouse serial number: 05 (operating)
4	Note	√	Mouse serial number: 05 (standby)
5	Note	√	Mouse serial number: 06 (operating)
6	Note	√	Mouse serial number: 06 (standby)

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz

Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

Radiated Emission Test (Below 1 GHz):

Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	OPERATING STATE	Available Channel	Tested Channel	Modulation Type
1	Operating	1	1	FSK
2	Standby	1	1	FSK
3	Operating	1	1	FSK
4	Standby	1	1	FSK
5	Operating	1	1	FSK
6	Standby	1	1	FSK



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.227)
ANSI C63.4 -2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of Emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 22, 2006
HP Preamplifier	8449B	3008A01924	Sep. 06, 2006
HP Preamplifier	8449B	3008A01638	Sep. 21, 2006
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Nov. 01, 2006
Schwarzbeck Antenna	VULB 9168	137	Feb. 21, 2007
Schwarzbeck Antenna	VHBA 9123	480	Apr. 11, 2006
EMCO Horn Antenna	3115	6714	Oct. 26, 2006
EMCO Horn Antenna	3115	9312-4192	Mar. 21, 2006
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V 7.6.011	NA	NA
TIMES RF cable	LL142	CABLE-CH6-01	Dec. 19, 2006
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	Mar. 20. 2006
Loop Antenna R & S	HFHZ-Z2	881058/15	Nov. 14, 2006

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in ADT Chamber No. 6.
 4. The Industry Canada Reference No. IC 3789-6.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.2.4 TEST SETUP

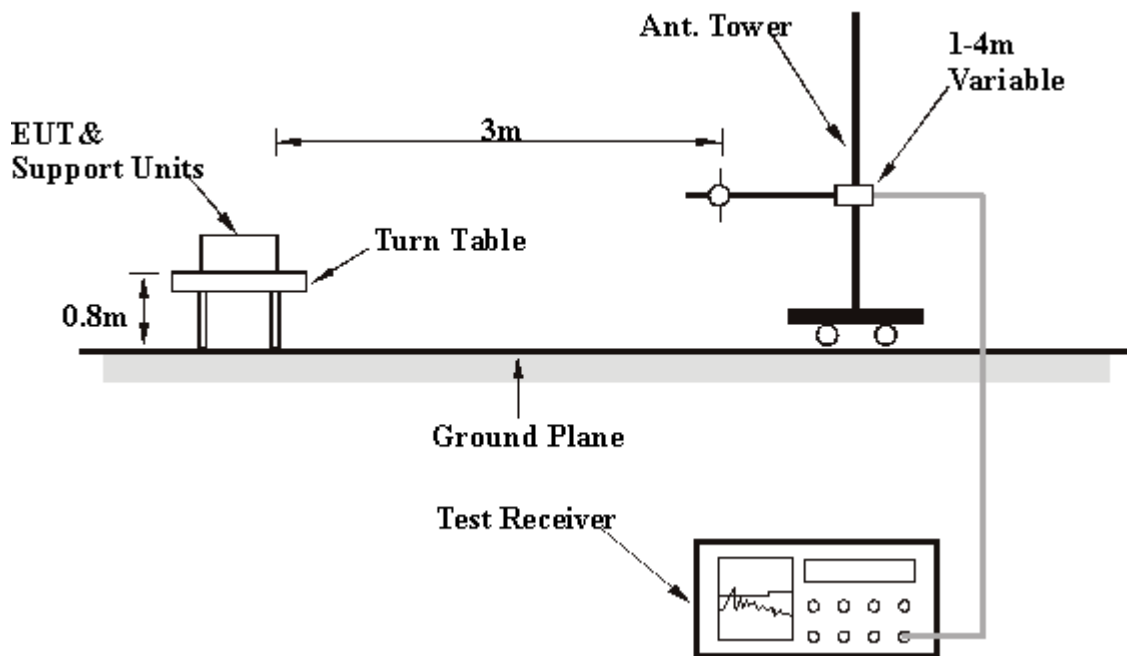

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.

4.2.6 TEST RESULT

TEST MODE	1	SERIAL NO.	04
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Peak / Average
TESTED BY	Jamison Chan	OPERATING STATE	Operating

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	43.67 PK	100.00	-56.33	2.24	20	33.02	10.65
2	*27.045	43.24 AV	80.00	-36.76	2.24	20	32.59	10.65

REMARKS:

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

TEST MODE	1	SERIAL NO.	04
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Operating

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.79	23.55 QP	40.00	-16.45	2.00 H	304	11.02	12.53
2	244.48	28.51 QP	46.00	-17.49	1.00 H	82	16.28	12.23
3	767.20	26.31 QP	46.00	-19.69	1.00 H	28	3.06	23.25
4	852.34	27.24 QP	46.00	-18.76	1.75 H	58	2.59	24.65
5	888.99	26.87 QP	46.00	-19.13	2.00 H	166	2.24	24.63
6	945.03	28.22 QP	46.00	-17.78	1.00 H	202	2.73	25.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.79	18.47 QP	40.00	-21.53	1.75 V	358	5.94	12.53
2	761.81	25.29 QP	46.00	-20.71	1.00 V	124	2.02	23.26
3	820.01	25.35 QP	46.00	-20.65	1.75 V	298	1.57	23.77
4	859.89	27.49 QP	46.00	-18.51	1.00 V	238	2.84	24.65
5	907.31	26.10 QP	46.00	-19.90	3.00 V	124	1.34	24.77
6	943.96	27.56 QP	46.00	-18.44	1.75 V	40	2.09	25.47

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE	2	SERIAL NO.	04
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Standby

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	82.81	19.05 QP	40.00	-20.95	2.00 H	10	9.47	9.57
2	751.03	24.86 QP	46.00	-21.14	1.00 H	184	1.57	23.29
3	834.02	26.16 QP	46.00	-19.84	2.00 H	172	1.97	24.18
4	872.82	25.89 QP	46.00	-20.11	2.00 H	352	1.25	24.64
5	914.86	26.76 QP	46.00	-19.24	2.00 H	112	1.85	24.91
6	956.89	27.86 QP	46.00	-18.14	2.00 H	10	2.42	25.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	711.16	22.98 QP	46.00	-23.02	1.00 V	352	1.13	21.85
2	744.57	24.61 QP	46.00	-21.39	2.00 V	268	1.52	23.09
3	803.84	25.38 QP	46.00	-20.62	2.00 V	142	2.09	23.30
4	850.19	27.05 QP	46.00	-18.95	1.00 V	52	2.40	24.65
5	886.83	26.11 QP	46.00	-19.89	2.00 V	244	1.47	24.63
6	934.26	27.39 QP	46.00	-18.61	2.00 V	88	2.10	25.29

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE	3	SERIAL NO.	05
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Peak / Average
TESTED BY	Jamison Chan	OPERATING STATE	Operating

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	44.46PK	100.00	-55.54	2.12	358	33.81	10.65
2	*27.045	43.87AV	80.00	-36.13	2.12	358	33.22	10.65

REMARKS:

- 7 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 8 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 9 The other emission levels were very low against the limit.
- 10 Margin value = Emission level – Limit value.
- 11 "*" = Fundamental frequency.
- 12 Loop antenna was used for all radiated emission below 30MHz.

TEST MODE	3	SERIAL NO.	05
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Operating

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.79	23.75 QP	40.00	-16.25	2.00 H	352	11.22	12.53
2	244.48	25.95 QP	46.00	-20.05	1.00 H	76	13.72	12.23
3	812.47	25.66 QP	46.00	-20.34	1.75 H	232	2.11	23.55
4	870.67	27.33 QP	46.00	-18.67	1.25 H	166	2.69	24.64
5	924.56	27.27 QP	46.00	-18.73	1.00 H	58	2.17	25.10
6	957.97	28.04 QP	46.00	-17.96	3.00 H	58	2.63	25.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	437.40	27.51 QP	46.00	-18.49	2.00 V	286	10.58	16.94
2	802.77	26.06 QP	46.00	-19.94	2.00 V	46	2.79	23.27
3	841.57	27.16 QP	46.00	-18.84	3.00 V	64	2.76	24.41
4	876.06	26.54 QP	46.00	-19.46	3.00 V	256	1.90	24.64
5	913.78	27.63 QP	46.00	-18.37	1.50 V	346	2.73	24.89
6	959.04	30.77 QP	46.00	-15.23	1.75 V	40	5.38	25.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE	4	SERIAL NO.	05
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Standby

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	739.18	24.31 QP	46.00	-21.69	2.00 H	274	1.42	22.89
2	773.67	25.11 QP	46.00	-20.89	2.00 H	4	1.87	23.24
3	836.18	26.12 QP	46.00	-19.88	1.00 H	16	1.88	24.25
4	876.06	26.81 QP	46.00	-19.19	2.00 H	184	2.17	24.64
5	912.70	26.25 QP	46.00	-19.75	2.00 H	298	1.38	24.87
6	950.42	27.70 QP	46.00	-18.30	1.00 H	88	2.12	25.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	714.39	24.03 QP	46.00	-21.97	2.00 V	340	2.06	21.97
2	749.96	24.40 QP	46.00	-21.60	1.00 V	190	1.11	23.29
3	809.23	25.15 QP	46.00	-20.85	2.00 V	64	1.69	23.46
4	849.11	26.06 QP	46.00	-19.94	1.00 V	58	1.43	24.63
5	905.16	26.77 QP	46.00	-19.23	1.00 V	130	2.04	24.73
6	956.89	27.40 QP	46.00	-18.60	2.00 V	304	1.97	25.44

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE	5	SERIAL NO.	06
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Peak / Average
TESTED BY	Jamison Chan	OPERATING STATE	Operating

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	42.88PK	100.00	-57.12	1.93	0	32.33	10.65
2	*27.045	41.41AV	80.00	-38.59	1.93	0	30.76	10.65

REMARKS:

- 13 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 14 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 15 The other emission levels were very low against the limit.
- 16 Margin value = Emission level – Limit value.
- 17 "*" = Fundamental frequency.
- 18 Loop antenna was used for all radiated emission below 30MHz.

TEST MODE	5	SERIAL NO.	06
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Operating

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.71	24.02 QP	40.00	-15.98	3.00 H	16	11.34	12.67
2	244.48	28.03 QP	46.00	-17.97	1.00 H	70	15.80	12.23
3	846.96	26.07 QP	46.00	-19.93	1.50 H	184	1.50	24.56
4	887.91	26.56 QP	46.00	-19.44	2.00 H	10	1.93	24.63
5	922.40	27.62 QP	46.00	-18.38	1.25 H	280	2.56	25.06
6	959.04	29.02 QP	46.00	-16.98	1.50 H	64	3.63	25.39

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	486.98	26.35 QP	46.00	-19.65	1.75 V	4	8.32	18.03
2	590.44	26.12 QP	46.00	-19.88	1.25 V	208	5.87	20.26
3	842.64	26.16 QP	46.00	-19.84	1.00 V	190	1.72	24.44
4	881.44	27.44 QP	46.00	-18.56	1.75 V	106	2.80	24.64
5	921.32	27.34 QP	46.00	-18.66	1.25 V	172	2.31	25.04
6	959.04	30.77 QP	46.00	-15.23	1.75 V	76	5.38	25.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE	6	SERIAL NO.	06
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 78% RH, 1008hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Standby

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	760.73	24.96 QP	46.00	-21.04	2.00 H	220	1.69	23.27
2	817.86	25.53 QP	46.00	-20.47	1.00 H	196	1.82	23.71
3	853.42	27.16 QP	46.00	-18.84	1.00 H	244	2.51	24.65
4	900.84	26.92 QP	46.00	-19.08	1.00 H	28	2.28	24.64
5	933.18	27.62 QP	46.00	-18.38	2.00 H	274	2.35	25.27
6	959.04	27.09 QP	46.00	-18.91	1.00 H	208	1.70	25.39

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	728.40	24.15 QP	46.00	-21.85	2.00 V	172	1.66	22.49
2	767.20	25.02 QP	46.00	-20.98	1.00 V	178	1.76	23.25
3	808.16	25.12 QP	46.00	-20.88	2.00 V	184	1.69	23.42
4	850.19	26.27 QP	46.00	-19.73	2.00 V	88	1.61	24.65
5	908.39	26.59 QP	46.00	-19.41	1.00 V	202	1.80	24.79
6	947.19	27.08 QP	46.00	-18.92	2.00 V	232	1.55	25.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, UL , A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.