

FCC TEST REPORT

REPORT NO.: RF960730A04

MODEL NO.: 1133

RECEIVED: July 30, 2007

TESTED: Aug. 3, 2007

ISSUED: Aug. 10, 2007

APPLICANT: MICROSOFT CORPORATION

ADDRESS: ONE MICROSOFT WAY REDMOND,
WA 98052-6399, U.S.A

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 21 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.1	DESCRIPTION OF TEST MODES.....	6
3.2	CONFIGURATION OF SYSTEM UNDER TEST.....	6
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST PROCEDURE AND RESULT	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.2	RADIATED EMISSION MEASUREMENT	9
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	9
4.2.2	TEST INSTRUMENT.....	10
4.2.3	TEST PROCEDURE	11
4.2.4	TEST SETUP	12
4.2.5	EUT OPERATING CONDITION	12
4.2.6	TEST RESULT	13
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	19
6	INFORMATION ON THE TESTING LABORATORIES	20
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	21



1 CERTIFICATION

PRODUCT: Microsoft® Wireless Mouse 700 v2.0
BRAND NAME: Microsoft®
MODEL NO.: 1133
APPLICANT: MICROSOFT CORPORATION
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Aug. 3, 2007
STANDARDS: FCC Part 15, Subpart C (Section 15.227),
ANSI C63.4 -2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** Aug. 10, 2007
(Annie Chang / Senior Specialist)

TECHNICAL
ACCEPTANCE : Jamison Chan , **DATE:** Aug. 10, 2007
Responsible for RF (Jamison Chan / Senior Engineer)

APPROVED BY : Ken Liu , **DATE:** Aug. 10, 2007
(Ken Liu / Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3Vdc from batteries
15.227 15.209	Radiated Emission Test	PASS	Minimum passing margin is -16.04dB at 31.944MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 1GHz	3.75 dB
	1GHz ~ 40GHz	2.89 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Microsoft® Wireless Mouse 700 v2.0
MODEL NO.	1133
FCC ID	C3K1133
POWER SUPPLY	3.0Vdc from batteries
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	27.045 MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Loop antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a wireless mouse which is a transmitter
2. The EUT has 3 samples, which are defined as their serial no. as follows:

Model No.	Serial no.
1133	7
	8
	9

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.1 DESCRIPTION OF TEST MODES


One channel was provided to this EUT

Channel	Frequency (MHz)
1	27.045MHz

Three sets of identical samples are tested and presented in the report.

Mouse Serial Number
7
8
9

3.2 CONFIGURATION OF SYSTEM UNDER TEST

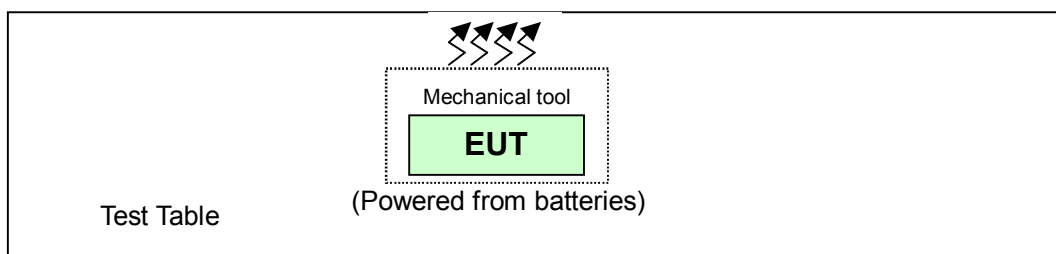

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to		Description
	PLC	RE<1G	
1	Note	√	serial number: 7
2	Note	√	serial number: 8
3	Note	√	serial number: 9

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz

Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1 GHz):

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	OPERATING STATE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1	Operating	1	1	FSK
2	Operating	1	1	FSK
3	Operating	1	1	FSK

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.227)
ANSI C63.4 -2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of Emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 09, 2008
HP Preamplifier	8449B	3008A01924	Sep. 05, 2007
HP Preamplifier	8449B	3008A01638	Sep. 17, 2007
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Oct. 24, 2007
Schwarzbeck Antenna	VULB 9168	137	Oct. 01, 2007
Schwarzbeck Antenna	VHBA 9123	480	Apr. 18, 2008
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V 7.6.15	NA	NA
SUHNER RF cable	SF104-26.5	CABLE-CH6-17m-01	Dec. 11, 2007
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	Mar. 13, 2008
Loop Antenna R & S	HFH2-Z2	100070	Nov. 28, 2007

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in ADT Chamber No. 6.
 4. The Industry Canada Reference No. IC 3789-6.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference-receiving antenna.

4.2.4 TEST SETUP

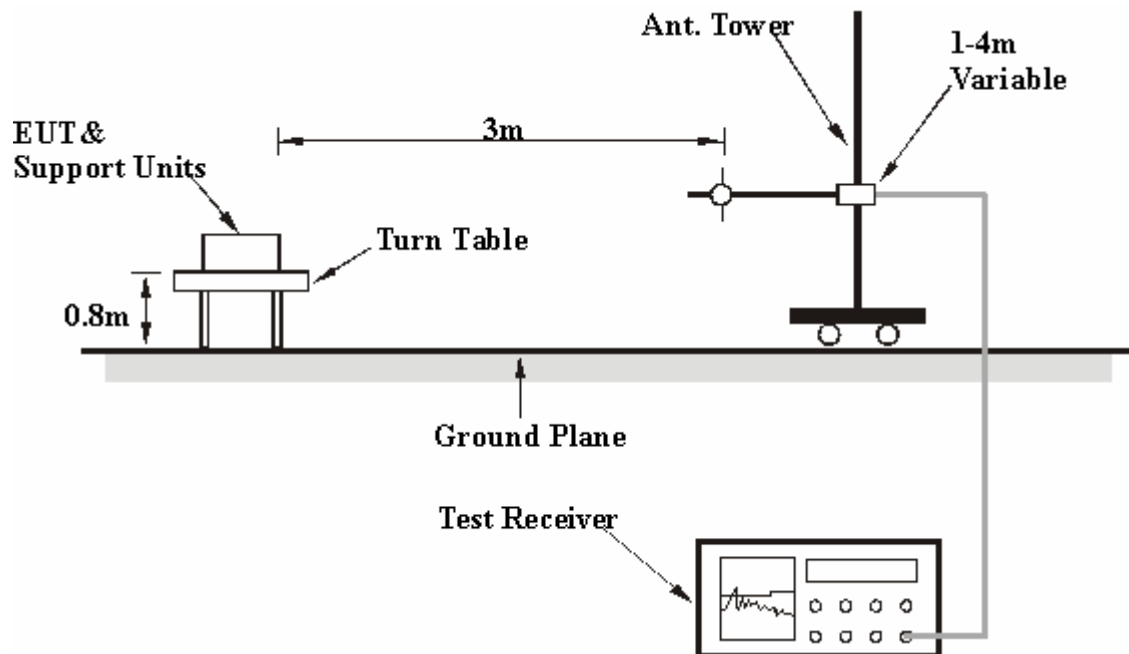

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.

4.2.6 TEST RESULT

TEST MODE	1	SERIAL NO.	7
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 59% RH, 996hPa	DETECTOR FUNCTION	Peak / Average
TESTED BY	Jamison Chan	OPERATING STATE	Operating

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	49.85 PK	100.00	-50.15	1.94	257	29.63	20.22
2	*27.045	40.79 AV	80.00	-39.21	1.94	257	20.57	20.22

REMARKS:

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

TEST MODE	1	SERIAL NO.	7
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 59% RH, 996hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Operating

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	784.228	27.38 QP	46.00	-18.62	2.76 H	10	-0.74	28.12
2	844.489	27.15 QP	46.00	-18.85	1.83 H	133	-1.56	28.71
3	863.928	27.65 QP	46.00	-18.35	2.54 H	349	-1.34	28.99
4	891.142	28.01 QP	46.00	-17.99	3.11 H	142	-1.40	29.41
5	931.964	29.37 QP	46.00	-16.63	2.08 H	340	-0.52	29.89
6	953.347	29.26 QP	46.00	-16.74	1.99 H	178	-0.84	30.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.944	23.96 QP	40.00	-16.04	1.00 V	256	10.98	12.98
2	377.956	27.17 QP	46.00	-18.83	1.00 V	10	8.65	18.52
3	778.397	27.02 QP	46.00	-18.98	1.22 V	88	-1.08	28.10
4	869.760	27.73 QP	46.00	-18.27	1.00 V	19	-1.35	29.08
5	893.086	28.02 QP	46.00	-17.98	1.17 V	70	-1.41	29.43
6	918.357	29.60 QP	46.00	-16.40	1.00 V	229	-0.14	29.74

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE	2	SERIAL NO.	8
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 59% RH, 996hPa	DETECTOR FUNCTION	Peak / Average
TESTED BY	Jamison Chan	OPERATING STATE	Operating

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	50.30 PK	100.00	-49.70	1.77	222	30.08	20.22
2	*27.045	40.94 AV	80.00	-39.06	1.77	222	20.72	20.22

REMARKS:

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

TEST MODE	2	SERIAL NO.	8
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 59% RH, 996hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Operating

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	749.238	26.26 QP	46.00	-19.74	2.97 H	211	-1.72	27.98
2	782.285	26.53 QP	46.00	-19.47	2.58 H	10	-1.58	28.11
3	801.723	26.97 QP	46.00	-19.03	1.67 H	10	-1.22	28.19
4	844.489	27.24 QP	46.00	-18.76	2.87 H	319	-1.47	28.71
5	854.208	27.83 QP	46.00	-18.17	2.47 H	100	-1.01	28.84
6	902.806	27.63 QP	46.00	-18.37	3.08 H	307	-1.94	29.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	747.295	26.42 QP	46.00	-19.58	1.00 V	10	-1.47	27.89
2	788.116	26.88 QP	46.00	-19.12	1.00 V	226	-1.25	28.13
3	834.770	27.18 QP	46.00	-18.82	1.00 V	286	-1.41	28.59
4	873.647	27.53 QP	46.00	-18.47	1.21 V	295	-1.61	29.14
5	906.693	28.75 QP	46.00	-17.25	1.00 V	58	-0.87	29.61
6	933.908	28.47 QP	46.00	-17.53	1.02 V	103	-1.44	29.91

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE	3	SERIAL NO.	9
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 59% RH, 996hPa	DETECTOR FUNCTION	Peak / Average
TESTED BY	Jamison Chan	OPERATING STATE	Operating

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	50.37 PK	100.00	-49.63	1.81	237	30.15	20.22
2	*27.045	40.80 AV	80.00	-39.20	1.81	237	20.58	20.22

REMARKS:

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

TEST MODE	3	SERIAL NO.	9
MODULATION TYPE	FSK	CHANNEL	1
INPUT POWER	3Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 59% RH, 996hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jamison Chan	OPERATING STATE	Operating

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	758.958	27.54 QP	46.00	-18.46	2.39 H	184	-0.50	28.04
2	813.387	26.56 QP	46.00	-19.44	1.74 H	10	-1.77	28.33
3	830.882	26.98 QP	46.00	-19.02	2.88 H	10	-1.57	28.55
4	861.984	27.72 QP	46.00	-18.28	3.10 H	37	-1.24	28.96
5	895.030	28.40 QP	46.00	-17.60	2.57 H	184	-1.06	29.46
6	949.459	28.89 QP	46.00	-17.11	2.16 H	58	-1.19	30.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	792.004	26.54 QP	46.00	-19.46	1.50 V	349	-1.61	28.14
2	840.601	27.20 QP	46.00	-18.80	1.50 V	64	-1.47	28.67
3	858.096	28.78 QP	46.00	-17.22	1.50 V	340	-0.12	28.90
4	881.423	28.26 QP	46.00	-17.74	1.00 V	112	-1.00	29.26
5	926.132	28.40 QP	46.00	-17.60	1.50 V	244	-1.43	29.83
6	941.683	29.03 QP	46.00	-16.97	1.00 V	7	-0.97	30.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, UL , A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.