



FCC TEST REPORT

REPORT NO.: RF980526A08

MODEL NO.: 1391

RECEIVED: May 26, 2009

TESTED: June 3 ~ 6, 2009

ISSUED: June 11, 2009

APPLICANT: MICROSOFT CORPORATION

ADDRESS: ONE MICROSOFT WAY REDMOND, WA
98052-6399, U.S.A

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB LOCATION: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,
Taipei Hsien, 244 Taiwan

This test report consists of 56 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.2	RADIATED EMISSION MEASUREMENT	11
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.2.2	TEST INSTRUMENTS	12
4.2.3	TEST PROCEDURES	13
4.2.4	DEVIATION FROM TEST STANDARD	13
4.2.5	TEST SETUP	14
4.2.6	EUT OPERATING CONDITIONS	14
4.2.7	TEST RESULTS	15
4.3	NUMBER OF HOPPING FREQUENCY USED	30
4.3.1	LIMIT OF HOPPING FREQUENCY USED	30
4.3.2	TEST INSTRUMENTS	30
4.3.3	TEST PROCEDURES	30
4.3.4	DEVIATION FROM TEST STANDARD	31
4.3.5	TEST SETUP	31
4.3.6	TEST RESULTS	31
4.4	DWELL TIME ON EACH CHANNEL	33
4.4.1	LIMIT OF DWELL TIME USED	33
4.4.2	TEST INSTRUMENTS	33
4.4.3	TEST PROCEDURES	33
4.4.4	DEVIATION FROM TEST STANDARD	33
4.4.5	TEST SETUP	34
4.4.6	TEST RESULTS	34
4.5	CHANNEL BANDWIDTH	37
4.5	CHANNEL BANDWIDTH	37
4.5.1	LIMITS OF CHANNEL BANDWIDTH	37
4.5.2	TEST INSTRUMENTS	37
4.5.3	TEST PROCEDURE	37
4.5.4	DEVIATION FROM TEST STANDARD	38
4.5.5	TEST SETUP	38
4.5.6	EUT OPERATING CONDITION	38
4.5.7	TEST RESULTS	38



4.6	HOPPING CHANNEL SEPARATION	41
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	41
4.6.2	TEST INSTRUMENTS	41
4.6.3	TEST PROCEDURES.....	41
4.6.4	DEVIATION FROM TEST STANDARD	42
4.6.5	TEST SETUP	42
4.6.6	TEST RESULTS.....	42
4.7	MAXIMUM PEAK OUTPUT POWER	45
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	45
4.7.2	TEST INSTRUMENTS	45
4.7.3	TEST PROCEDURES.....	45
4.7.4	DEVIATION FROM TEST STANDARD	45
4.7.5	TEST SETUP	46
4.7.6	EUT OPERATING CONDITION	46
4.7.7	TEST RESULTS.....	46
4.8	BAND EDGES MEASUREMENT	49
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	49
4.8.2	TEST INSTRUMENTS	49
4.8.3	TEST PROCEDURE	49
4.8.4	DEVIATION FROM TEST STANDARD	49
4.8.5	EUT OPERATING CONDITION	49
4.8.6	TEST RESULTS.....	50
4.9	ANTENNA REQUIREMENT	53
4.9.1	STANDARD APPLICABLE	53
4.9.2	ANTENNA CONNECTED CONSTRUCTION.....	53
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	54
6.	INFORMATION ON THE TESTING LABORATORIES	55
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	56



1. CERTIFICATION

PRODUCT: Microsoft Bluetooth Number Pad
BRAND NAME: Microsoft
MODEL NO.: 1391
APPLICANT: MICROSOFT CORPORATION
TESTED: June 3 ~ 6, 2009
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** June 11, 2009
(Annie Chang / Senior Specialist)

TECHNICAL ACCEPTANCE : Jamison Chan , **DATE:** June 11, 2009
Responsible for RF (Jamison Chan / Supervisor)

APPROVED BY : Ken Liu , **DATE:** June 11, 2009
(Ken Liu / Assistant Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Power supply is 1.5Vdc from battery
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec.: Min. 25 kHz or 20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -6.60dB at 2390.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz ~ 1GHz	3.72 dB
	1GHz ~ 40GHz	2.89 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Microsoft Bluetooth Number Pad
MODEL NO.	1391
FCC ID	C3K1391
POWER SUPPLY	1.5Vdc from battery
MODULATION TYPE	GFSK
RADIO TECHNOLOGY	FHSS
TRANSFER RATE	585.6Kbps
OPERATING FREQUENCY	2402 ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	1.521mW
ANTENNA TYPE	Printed antenna with 0.81dBi gain
DATA CABLE	N/A
I/O PORTS	N/A
ASSOCIATED DEVICES	N/A

NOTE:

1. The EUT is a Microsoft Bluetooth Number Pad, which is transceiver.
2. The EUT has 3 samples, which are defined as their serial no. as follows:

Model No.	Serial no.
1391	025
	092
	137


3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

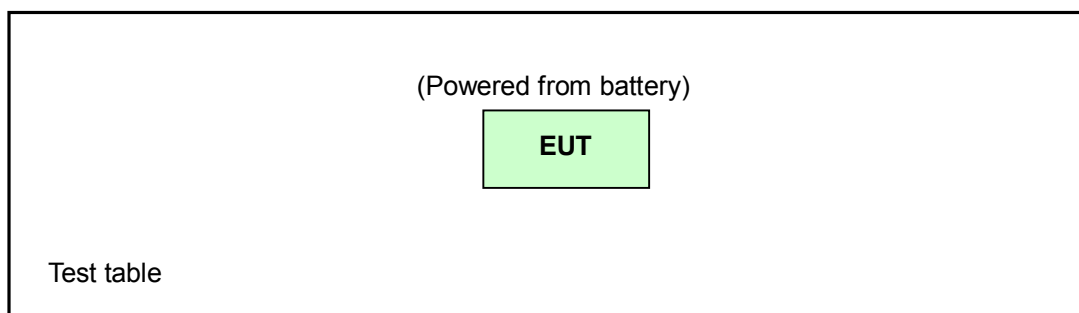



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	Note	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	SERIAL NO.	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	78	025, 092, 137	FHSS	GFSK	DH3

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	SERIAL NO.	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	025, 092, 137	FHSS	GFSK	DH3

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	SERIAL NO.	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 78	137	FHSS	GFSK	DH3

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	SERIAL NO.	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	137	FHSS	GFSK	DH3

3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any necessary accessory or support unit.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

N/A

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 04, 2009	May 03, 2010
HP Preamplifier	8449B	3008A01924	Sep. 03, 2008	Sep. 02, 2009
HP Preamplifier	8449B	3008A01292	Aug. 06, 2008	Aug. 05, 2009
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Dec. 04, 2008	Dec. 03, 2009
Schwarzbeck Antenna	VULB 9168	137	Apr. 29, 2009	Apr. 28, 2010
Schwarzbeck Antenna	VHBA 9123	480	Apr. 21, 2009	Apr. 20, 2010
EMCO Horn Antenna	3115	6714	Oct. 17, 2008	Oct. 16, 2009
EMCO Horn Antenna	3115	9312-4192	Apr. 17, 2009	Apr. 16, 2010
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF104-26.5	CABLE-CH6-17 m-01	Aug. 22, 2008	Aug. 21, 2009
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	Apr. 03, 2009	Apr. 02, 2010

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.
 4. The Industry Canada Reference No. IC 7450E-6.
 5. The FCC Site Registration No. is 447212.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

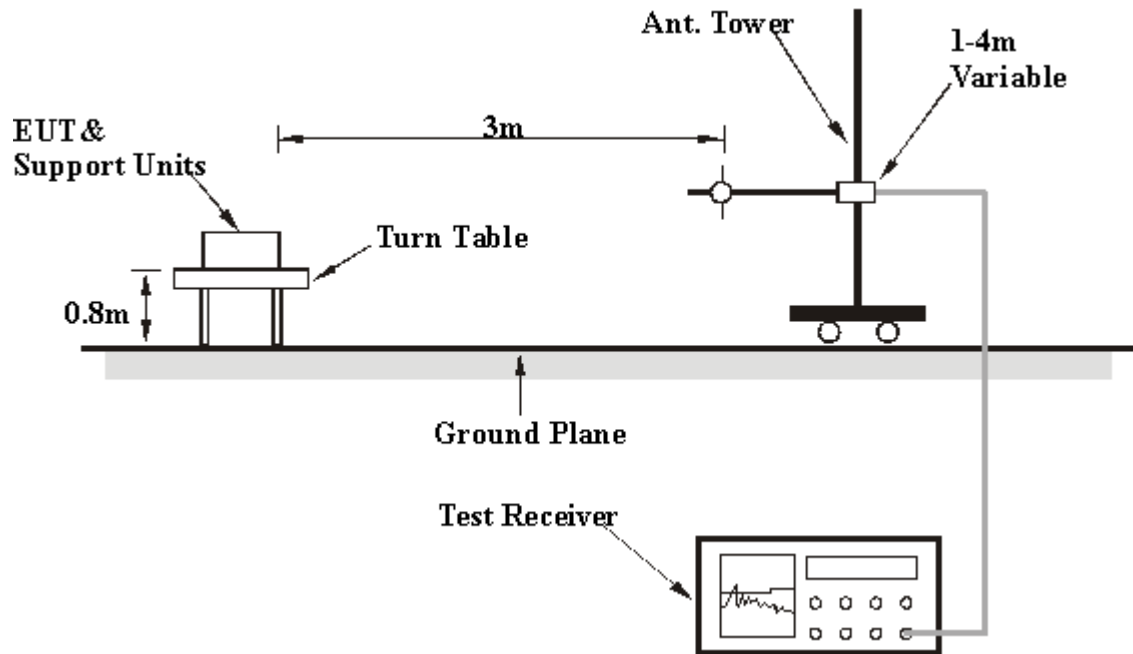

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission/receiving condition continuously at specific channel frequency.

4.2.7 TEST RESULTS

ABOVE 1GHZ DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 1002hPa	TESTED BY	Nick Chen
SERIAL NO.	025		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	43.70 PK	74.00	-30.30	1.00 H	238	11.78	31.91
2	1601.00	35.36 AV	54.00	-18.64	1.00 H	238	3.45	31.91
3	2390.00	60.05 PK	74.00	-13.95	1.00 H	192	24.98	35.07
4	2390.00	46.78 AV	54.00	-7.22	1.00 H	192	11.71	35.07
5	2400.00	50.81 PK	74.00	-23.19	1.00 H	192	15.72	35.09
6	2400.00	16.31 AV	54.00	-37.69	1.00 H	192	-18.78	35.09
7	*2402.00	100.52 PK			1.00 H	192	65.43	35.09
8	*2402.00	66.02 AV			1.00 H	192	30.93	35.09
9	4804.00	53.36 PK	74.00	-20.64	1.29 H	276	10.37	42.99
10	4804.00	18.86 AV	54.00	-35.14	1.29 H	276	-24.13	42.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 1002hPa	TESTED BY	Nick Chen
SERIAL NO.	025		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	42.49 PK	74.00	-31.51	1.00 V	226	10.58	31.91
2	1601.00	31.92 AV	54.00	-22.08	1.00 V	226	0.01	31.91
3	2390.00	59.29 PK	74.00	-14.71	1.03 V	153	24.22	35.07
4	2390.00	46.94 AV	54.00	-7.06	1.03 V	153	11.87	35.07
5	2400.00	45.26 PK	74.00	-28.74	1.03 V	153	10.17	35.09
6	2400.00	10.76 AV	54.00	-43.24	1.03 V	153	-24.33	35.09
7	*2402.00	94.97 PK			1.03 V	153	59.88	35.09
8	*2402.00	60.47 AV			1.03 V	153	25.38	35.09
9	4804.00	53.39 PK	74.00	-20.61	1.00 V	28	10.40	42.99
10	4804.00	18.89 AV	54.00	-35.11	1.00 V	28	-24.10	42.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 1002hPa	TESTED BY	Nick Chen
SERIAL NO.	025		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1627.00	44.04 PK	81.23	-37.19	1.00 H	270	12.00	32.03
2	#1627.00	34.86 AV	46.73	-11.87	1.00 H	270	2.82	32.03
3	*2441.00	101.23 PK			1.00 H	229	66.06	35.17
4	*2441.00	66.73 AV			1.00 H	229	31.56	35.17
5	4882.00	52.97 PK	74.00	-21.03	1.15 H	8	9.83	43.14
6	4882.00	18.47 AV	54.00	-35.53	1.15 H	8	-24.67	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1627.00	43.12 PK	77.21	-34.09	1.00 V	228	11.08	32.03
2	#1627.00	32.58 AV	42.71	-10.13	1.00 V	228	0.54	32.03
3	*2441.00	97.21 PK			1.00 V	150	62.04	35.17
4	*2441.00	62.71 AV			1.00 V	150	27.54	35.17
5	4882.00	54.15 PK	74.00	-19.85	1.00 V	40	11.01	43.14
6	4882.00	19.65 AV	54.00	-34.35	1.00 V	40	-23.49	43.14

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - " * ": Fundamental frequency.
 - The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 - Average value = peak reading + $20\log(\text{duty cycle})$.
 - "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 1002hPa	TESTED BY	Nick Chen
SERIAL NO.	025		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1653.00	45.77 PK	82.75	-36.98	1.00 H	199	13.61	32.15
2	#1653.00	38.54 AV	48.25	-9.71	1.00 H	199	6.38	32.15
3	*2480.00	102.75 PK			1.00 H	240	67.50	35.25
4	*2480.00	68.25 AV			1.00 H	240	33.00	35.25
5	2483.50	48.55 PK	74.00	-25.45	1.00 H	240	13.29	35.26
6	2483.50	14.05 AV	54.00	-39.95	1.00 H	240	-21.21	35.26
7	4960.00	57.51 PK	74.00	-16.49	1.00 H	241	14.21	43.30
8	4960.00	23.01 AV	54.00	-30.99	1.00 H	241	-20.29	43.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1653.00	44.19 PK	78.38	-34.19	1.00 V	197	12.03	32.15
2	#1653.00	33.71 AV	43.88	-10.17	1.00 V	197	1.55	32.15
3	*2480.00	98.38 PK			1.00 V	154	63.13	35.25
4	*2480.00	63.88 AV			1.00 V	154	28.63	35.25
5	2483.50	44.18 PK	74.00	-29.82	1.00 V	154	8.92	35.26
6	2483.50	9.68 AV	54.00	-44.32	1.00 V	154	-25.58	35.26
7	4960.00	53.50 PK	74.00	-20.50	1.00 V	152	10.20	43.30
8	4960.00	19.00 AV	54.00	-35.00	1.00 V	152	-24.30	43.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	092		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	46.09 PK	74.00	-27.91	1.00 H	243	14.18	31.91
2	1601.00	38.73 AV	54.00	-15.27	1.00 H	243	6.82	31.91
3	2390.00	59.53 PK	74.00	-14.47	1.00 H	199	24.46	35.07
4	2390.00	47.40 AV	54.00	-6.60	1.00 H	199	12.33	35.07
5	2400.00	53.27 PK	74.00	-20.73	1.00 H	199	18.18	35.09
6	2400.00	18.77 AV	54.00	-35.23	1.00 H	199	-16.32	35.09
7	*2402.00	100.98 PK			1.00 H	199	65.89	35.09
8	*2402.00	66.48 AV			1.00 H	199	31.39	35.09
9	4804.00	53.57 PK	74.00	-20.43	1.00 H	204	10.58	42.99
10	4804.00	19.07 AV	54.00	-34.93	1.00 H	204	-23.92	42.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	092		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	43.86 PK	74.00	-30.14	1.04 V	193	11.95	31.91
2	1601.00	33.55 AV	54.00	-20.45	1.04 V	193	1.64	31.91
3	2390.00	59.34 PK	74.00	-14.66	1.00 V	156	24.27	35.07
4	2390.00	47.16 AV	54.00	-6.84	1.00 V	156	12.09	35.07
5	2400.00	49.83 PK	74.00	-24.17	1.00 V	156	14.74	35.09
6	2400.00	15.33 AV	54.00	-38.67	1.00 V	156	-19.76	35.09
7	*2402.00	97.54 PK			1.00 V	156	62.45	35.09
8	*2402.00	63.04 AV			1.00 V	156	27.95	35.09
9	4804.00	54.88 PK	74.00	-19.12	1.00 V	38	11.89	42.99
10	4804.00	20.38 AV	54.00	-33.62	1.00 V	38	-22.61	42.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	092		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1627.00	46.49 PK	82.45	-35.96	1.00 H	266	14.46	32.03
2	#1627.00	40.13 AV	47.95	-7.82	1.00 H	266	8.10	32.03
3	*2441.00	102.45 PK			1.18 H	174	67.28	35.17
4	*2441.00	67.95 AV			1.18 H	174	32.78	35.17
5	4882.00	55.89 PK	74.00	-18.11	1.00 H	198	12.75	43.14
6	4882.00	21.39 AV	54.00	-32.61	1.00 H	198	-21.75	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1627.00	43.44 PK	79.15	-35.71	1.10 V	188	11.40	32.03
2	#1627.00	33.68 AV	44.65	-10.97	1.10 V	188	1.64	32.03
3	*2441.00	99.15 PK			1.00 V	156	63.98	35.17
4	*2441.00	64.65 AV			1.00 V	156	29.48	35.17
5	4882.00	54.90 PK	74.00	-19.10	1.00 V	37	11.76	43.14
6	4882.00	20.40 AV	54.00	-33.60	1.00 V	37	-22.74	43.14

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - " * ": Fundamental frequency.
 - The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 - Average value = peak reading + $20\log(\text{duty cycle})$.
 - "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	092		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1653.00	47.32 PK	82.33	-35.01	1.00 H	242	15.16	32.15
2	#1653.00	36.78 AV	47.83	-11.05	1.00 H	242	4.62	32.15
3	*2480.00	102.33 PK			1.00 H	239	67.08	35.25
4	*2480.00	67.83 AV			1.00 H	239	32.58	35.25
5	2483.50	48.73 PK	74.00	-25.27	1.00 H	239	13.47	35.26
6	2483.50	14.23 AV	54.00	-39.77	1.00 H	239	-21.03	35.26
7	4960.00	56.71 PK	74.00	-17.29	1.00 H	241	13.41	43.30
8	4960.00	22.21 AV	54.00	-31.79	1.00 H	241	-21.09	43.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1653.00	44.90 PK	79.82	-34.92	1.00 V	195	12.74	32.15
2	#1653.00	35.62 AV	45.32	-9.70	1.00 V	195	3.47	32.15
3	*2480.00	99.82 PK			1.00 V	155	64.57	35.25
4	*2480.00	65.32 AV			1.00 V	155	30.07	35.25
5	2483.50	46.22 PK	74.00	-27.78	1.00 V	155	10.96	35.26
6	2483.50	11.72 AV	54.00	-42.28	1.00 V	155	-23.54	35.26
7	4960.00	55.28 PK	74.00	-18.72	1.00 V	154	11.98	43.30
8	4960.00	20.78 AV	54.00	-33.22	1.00 V	154	-22.52	43.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	137		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	43.49 PK	74.00	-30.51	1.00 H	109	11.58	31.91
2	1601.00	34.55 AV	54.00	-19.45	1.00 H	109	2.63	31.91
3	2390.00	58.97 PK	74.00	-15.03	1.00 H	156	23.90	35.07
4	2390.00	47.07 AV	54.00	-6.93	1.00 H	156	12.00	35.07
5	2400.00	50.71 PK	74.00	-23.29	1.00 H	156	15.62	35.09
6	2400.00	16.21 AV	54.00	-37.79	1.00 H	156	-18.88	35.09
7	*2402.00	99.19 PK			1.00 H	156	64.10	35.09
8	*2402.00	64.69 AV			1.00 H	156	29.60	35.09
9	4804.00	55.05 PK	74.00	-18.95	1.00 H	197	12.06	42.99
10	4804.00	20.55 AV	54.00	-33.45	1.00 H	197	-22.44	42.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	137		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	41.60 PK	74.00	-32.40	1.03 V	223	9.69	31.91
2	1601.00	29.41 AV	54.00	-24.59	1.03 V	223	-2.50	31.91
3	2390.00	59.21 PK	74.00	-14.79	1.04 V	157	24.14	35.07
4	2390.00	47.27 AV	54.00	-6.73	1.04 V	157	12.20	35.07
5	2400.00	49.75 PK	74.00	-24.25	1.04 V	157	14.66	35.09
6	2400.00	15.25 AV	54.00	-38.75	1.04 V	157	-19.84	35.09
7	*2402.00	98.23 PK			1.04 V	157	63.14	35.09
8	*2402.00	63.73 AV			1.04 V	157	28.64	35.09
9	4804.00	53.47 PK	74.00	-20.53	1.02 V	78	10.48	42.99
10	4804.00	18.97 AV	54.00	-35.03	1.02 V	78	-24.02	42.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	137		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1627.00	43.91 PK	82.76	-38.85	1.00 H	107	11.87	32.03
2	#1627.00	34.41 AV	48.26	-13.85	1.00 H	107	2.37	32.03
3	*2441.00	102.76 PK			1.18 H	171	67.59	35.17
4	*2441.00	68.26 AV			1.18 H	171	33.09	35.17
5	4882.00	56.14 PK	74.00	-17.86	1.00 H	198	13.00	43.14
6	4882.00	21.64 AV	54.00	-32.36	1.00 H	198	-21.50	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1627.00	42.31 PK	78.93	-36.62	1.10 V	188	10.28	32.03
2	#1627.00	30.88 AV	44.43	-13.55	1.10 V	188	-1.15	32.03
3	*2441.00	98.93 PK			1.32 V	156	63.76	35.17
4	*2441.00	64.43 AV			1.32 V	156	29.26	35.17
5	4882.00	55.23 PK	74.00	-18.77	1.00 V	155	12.09	43.14
6	4882.00	20.73 AV	54.00	-33.27	1.00 V	155	-22.41	43.14

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - " * ": Fundamental frequency.
 - The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 - Average value = peak reading + $20\log(\text{duty cycle})$.
 - "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 83%RH 999hPa	TESTED BY	Nick Chen
SERIAL NO.	137		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1653.00	45.84 PK	81.87	-36.03	1.00 H	114	13.68	32.15
2	#1653.00	38.17 AV	47.37	-9.20	1.00 H	114	6.01	32.15
3	*2480.00	101.87 PK			1.00 H	235	66.62	35.25
4	*2480.00	67.37 AV			1.00 H	235	32.12	35.25
5	2483.50	49.89 PK	74.00	-24.11	1.00 H	235	14.63	35.26
6	2483.50	15.39 AV	54.00	-38.61	1.00 H	235	-19.87	35.26
7	4960.00	56.91 PK	74.00	-17.09	1.00 H	236	13.61	43.30
8	4960.00	22.41 AV	54.00	-31.59	1.00 H	236	-20.89	43.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1653.00	43.17 PK	79.12	-35.95	1.00 V	190	11.01	32.15
2	#1653.00	32.50 AV	44.62	-12.12	1.00 V	190	0.34	32.15
3	*2480.00	99.12 PK			1.00 V	153	63.87	35.25
4	*2480.00	64.62 AV			1.00 V	153	29.37	35.25
5	2483.50	48.14 PK	74.00	-25.86	1.00 V	153	12.88	35.26
6	2483.50	13.64 AV	54.00	-40.36	1.00 V	153	-21.62	35.26
7	4960.00	56.70 PK	74.00	-17.30	1.02 V	76	13.40	43.30
8	4960.00	22.20 AV	54.00	-31.80	1.02 V	76	-21.10	43.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 3 per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.
 8. "#": The radiated frequency is out the restricted band.



BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 79%RH 1003hPa	TESTED BY	Nick Chen
SERIAL NO.	025		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.93	18.12 QP	40.00	-21.88	1.05 H	133	5.74	12.38
2	774.51	24.46 QP	46.00	-21.54	1.05 H	121	-1.73	26.19
3	792.00	24.34 QP	46.00	-21.66	1.17 H	106	-2.14	26.48
4	838.66	25.27 QP	46.00	-20.73	1.08 H	199	-1.95	27.22
5	856.15	25.27 QP	46.00	-20.73	1.06 H	166	-2.21	27.48
6	885.31	25.82 QP	46.00	-20.18	1.03 H	268	-2.03	27.85
7	935.85	26.62 QP	46.00	-19.38	1.00 H	211	-1.81	28.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.88	22.31 QP	40.00	-17.69	1.00 V	259	10.06	12.25
2	778.40	24.30 QP	46.00	-21.70	1.05 V	214	-1.96	26.26
3	832.83	24.96 QP	46.00	-21.04	1.08 V	109	-2.17	27.13
4	867.82	25.61 QP	46.00	-20.39	1.11 V	280	-2.02	27.63
5	933.91	26.47 QP	46.00	-19.53	1.07 V	136	-1.94	28.41
6	951.40	27.37 QP	46.00	-18.63	1.00 V	10	-1.23	28.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 79%RH 1003hPa	TESTED BY	Nick Chen
SERIAL NO.	092		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.88	19.89 QP	40.00	-20.11	1.02 H	295	7.64	12.25
2	813.39	24.72 QP	46.00	-21.28	1.00 H	10	-2.11	26.82
3	836.71	25.64 QP	46.00	-20.36	1.13 H	10	-1.55	27.19
4	869.76	25.56 QP	46.00	-20.44	1.24 H	301	-2.09	27.65
5	922.24	26.91 QP	46.00	-19.09	1.13 H	109	-1.37	28.28
6	955.29	27.19 QP	46.00	-18.81	1.08 H	43	-1.46	28.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	90.26	26.04 QP	43.50	-17.46	1.02 V	112	17.92	8.12
2	780.34	24.43 QP	46.00	-21.57	1.00 V	118	-1.86	26.29
3	813.39	24.62 QP	46.00	-21.38	1.02 V	31	-2.20	26.82
4	838.66	24.80 QP	46.00	-21.20	1.11 V	46	-2.42	27.22
5	873.65	25.72 QP	46.00	-20.28	1.24 V	94	-1.98	27.70
6	891.14	25.88 QP	46.00	-20.12	1.13 V	55	-2.05	27.93
7	930.02	27.68 QP	46.00	-18.32	1.08 V	295	-0.69	28.37

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	1.5Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 79%RH 1003hPa	TESTED BY	Nick Chen
SERIAL NO.	137		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.93	18.42 QP	40.00	-21.58	1.02 H	223	6.04	12.38
2	782.28	24.01 QP	46.00	-21.99	1.00 H	139	-2.32	26.32
3	821.16	25.53 QP	46.00	-20.47	1.13 H	253	-1.41	26.94
4	858.10	25.86 QP	46.00	-20.14	1.00 H	136	-1.65	27.50
5	877.54	25.68 QP	46.00	-20.32	1.20 H	331	-2.07	27.75
6	933.91	26.39 QP	46.00	-19.61	1.19 H	85	-2.02	28.41
7	949.46	27.28 QP	46.00	-18.72	1.23 H	289	-1.30	28.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.96	22.84 QP	40.00	-17.16	1.10 V	202	10.59	12.25
2	776.45	24.07 QP	46.00	-21.93	1.08 V	307	-2.16	26.23
3	805.61	24.49 QP	46.00	-21.51	1.25 V	340	-2.21	26.70
4	836.71	25.82 QP	46.00	-20.18	1.22 V	253	-1.37	27.19
5	861.98	25.46 QP	46.00	-20.54	1.00 V	244	-2.10	27.55
6	955.29	27.62 QP	46.00	-18.38	1.32 V	247	-1.03	28.65

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Apr. 3, 2009	Apr. 2, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP




4.3.6 TEST RESULTS


There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T

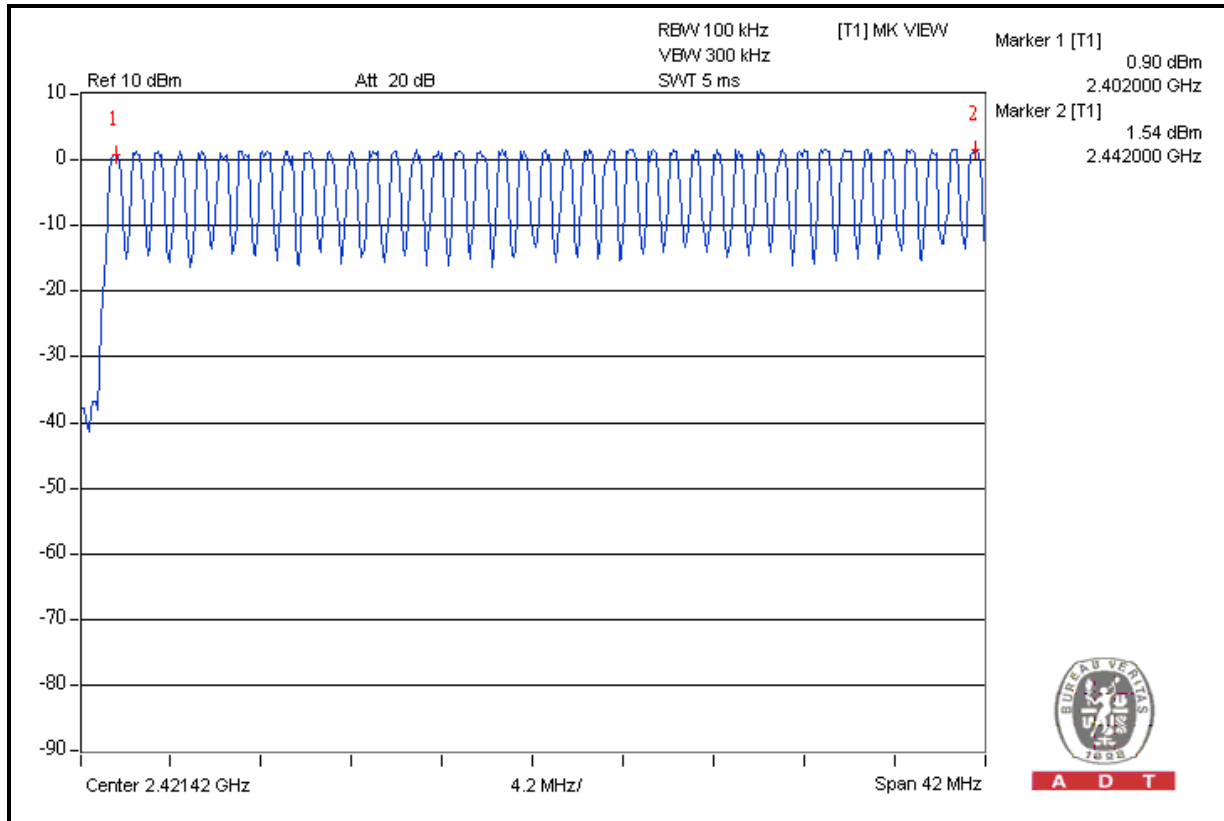

A D T

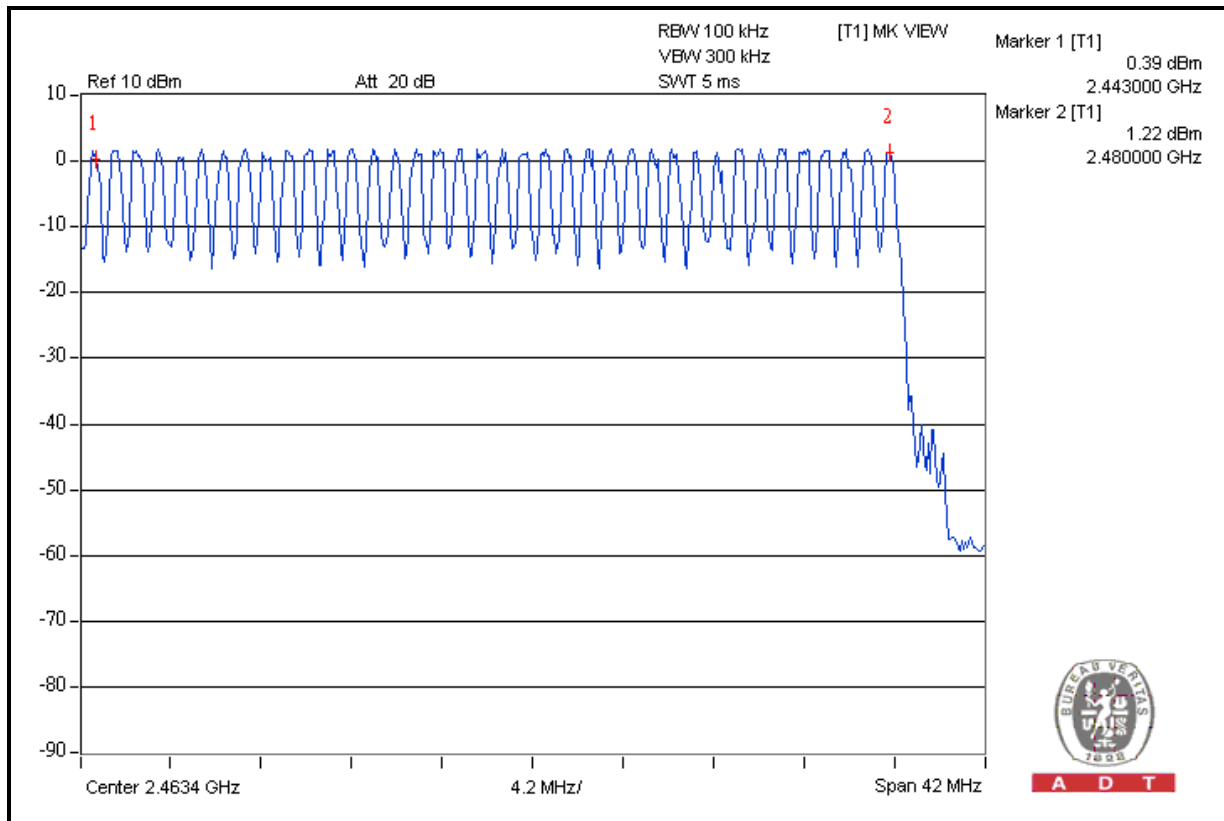

A D T

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Apr. 3, 2009	Apr. 2, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 TEST RESULTS



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.540	170.640	400
DH3	25 (times / 5 sec) *6.32=158.00 times	1.776	280.608	400

NOTE: Test plots of the transmitting time slot are shown on next 2 pages.



A D T



DH1

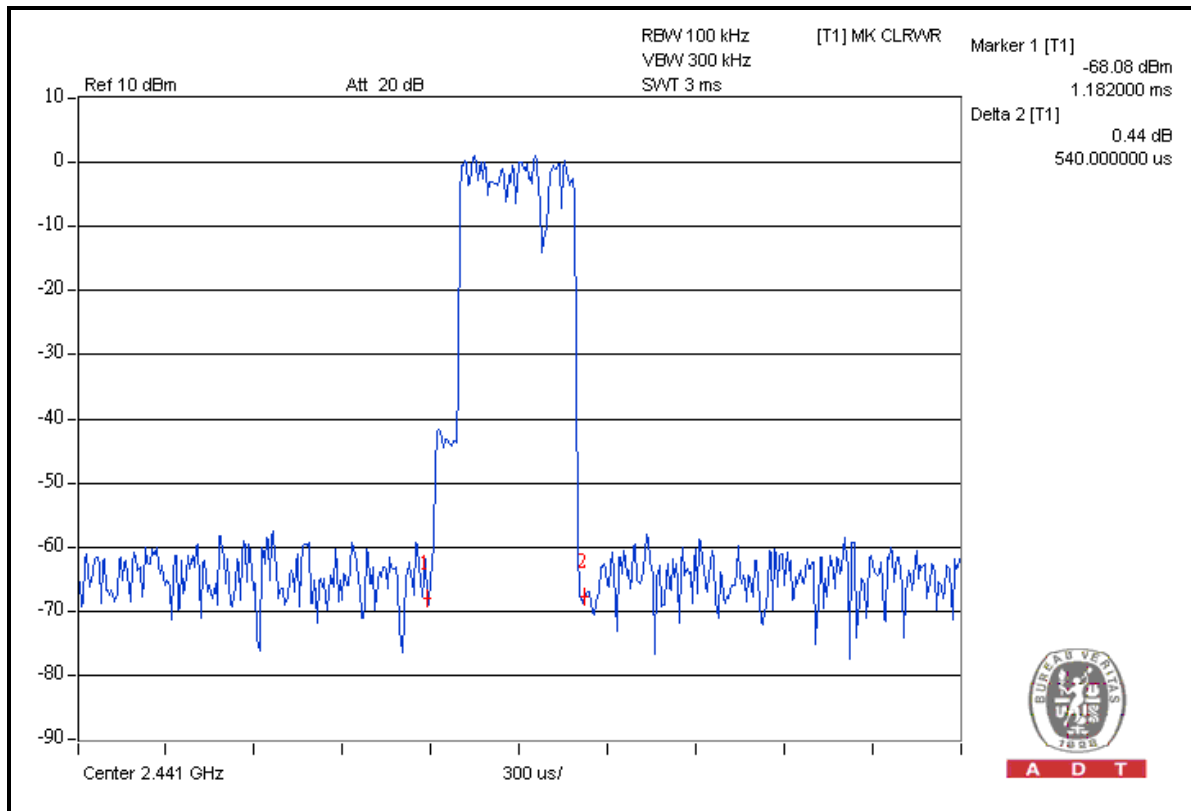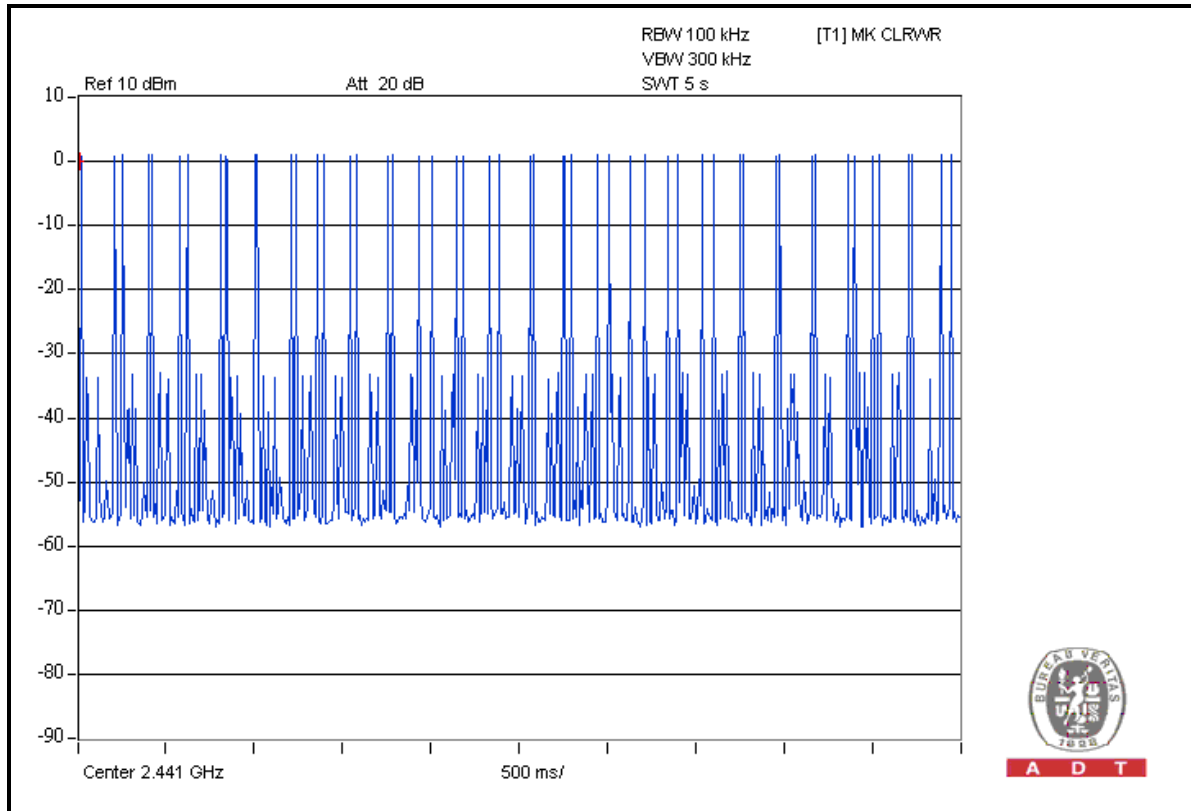



A D T

DH3

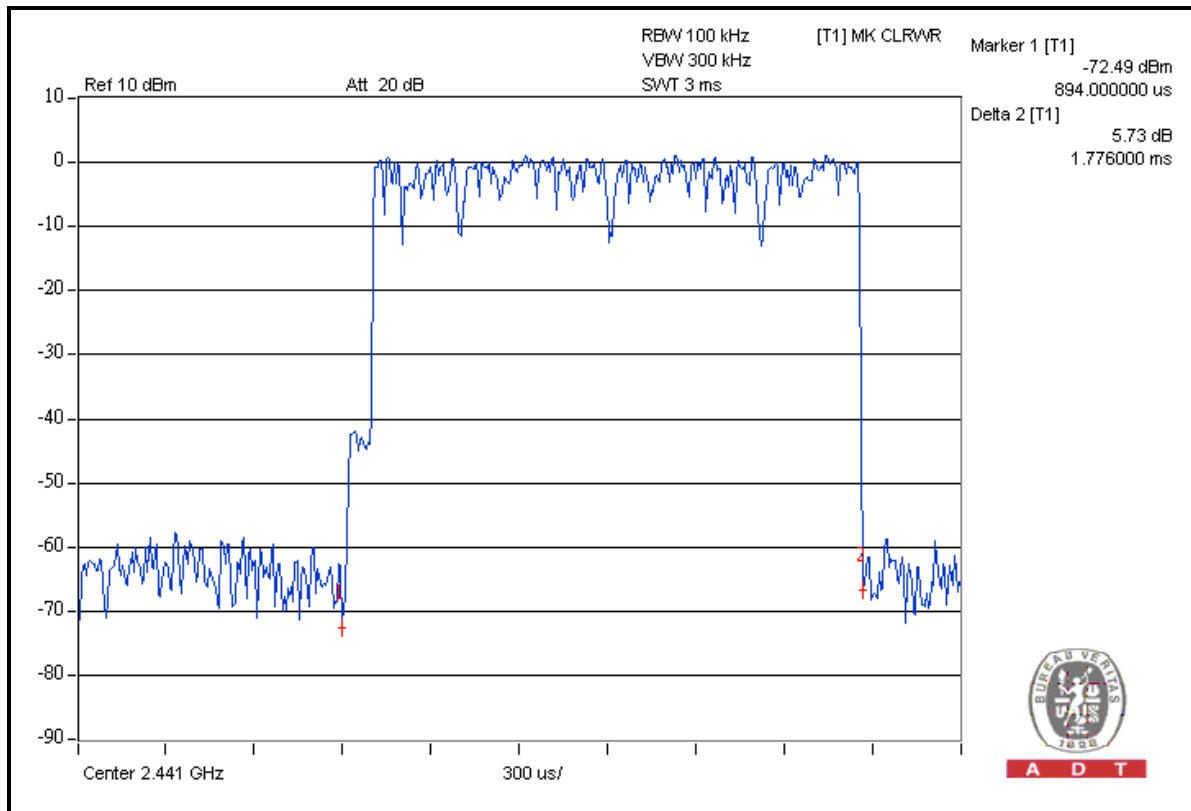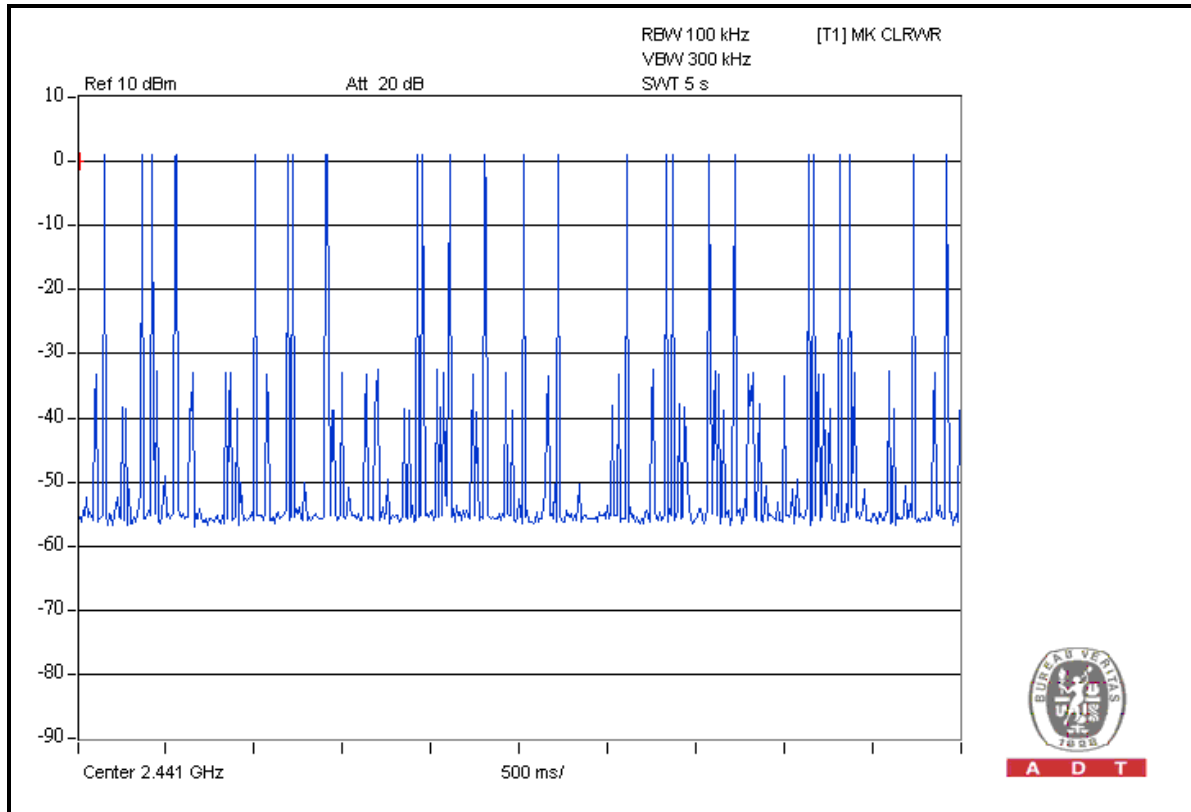



4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, the 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Apr. 3, 2009	Apr. 2, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS


SERIAL NO.	137		
INPUT POWER	1.5Vdc	CHANNEL	0, 39, 78
ENVIRONMENTAL CONDITIONS	24deg. C, 70% RH, 1005hPa	TESTED BY	Chad Lee

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.954
39	2441	0.982
78	2480	0.959




A D T

CH 0

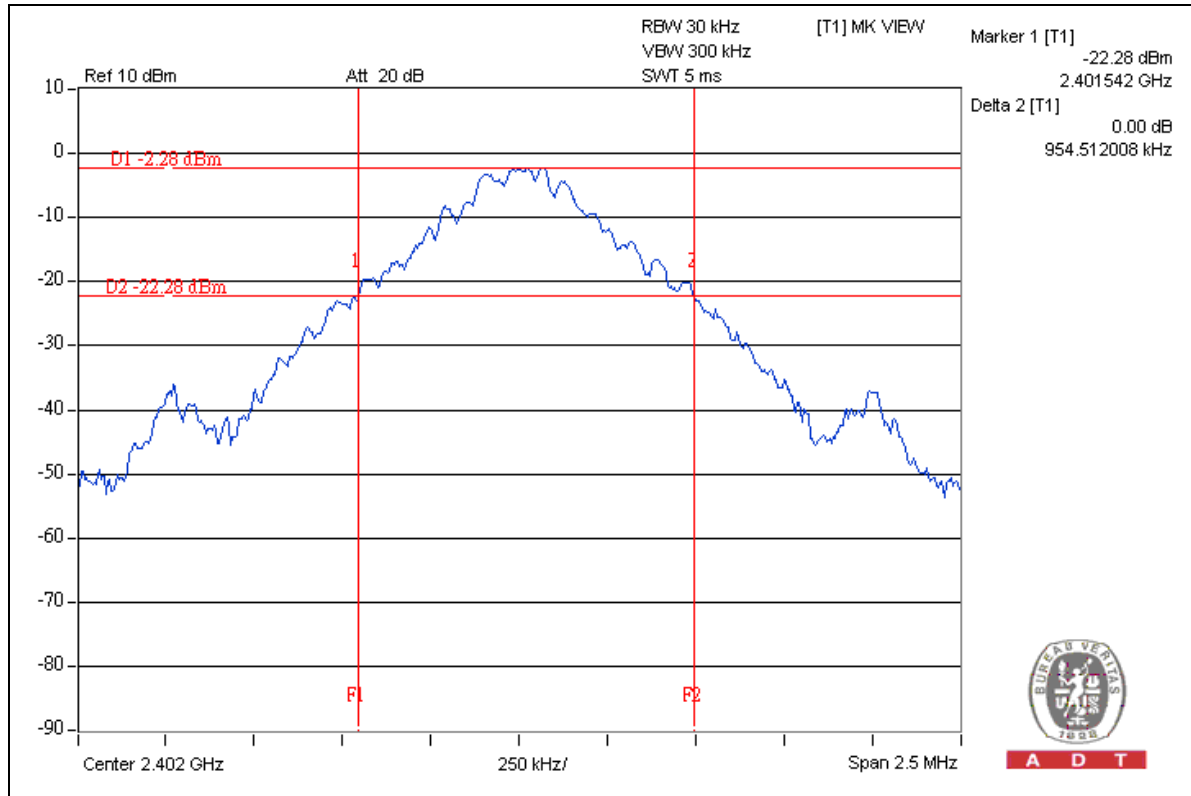


CH 39

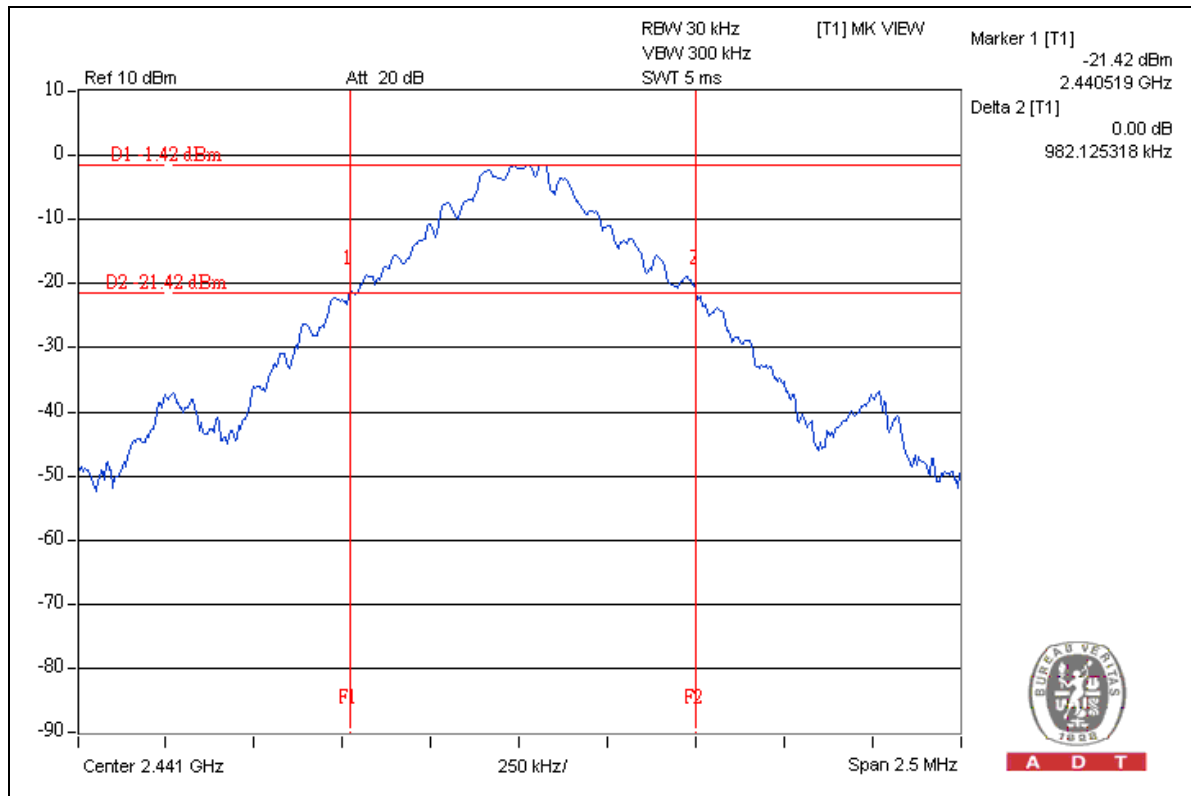



A D T

CH 78

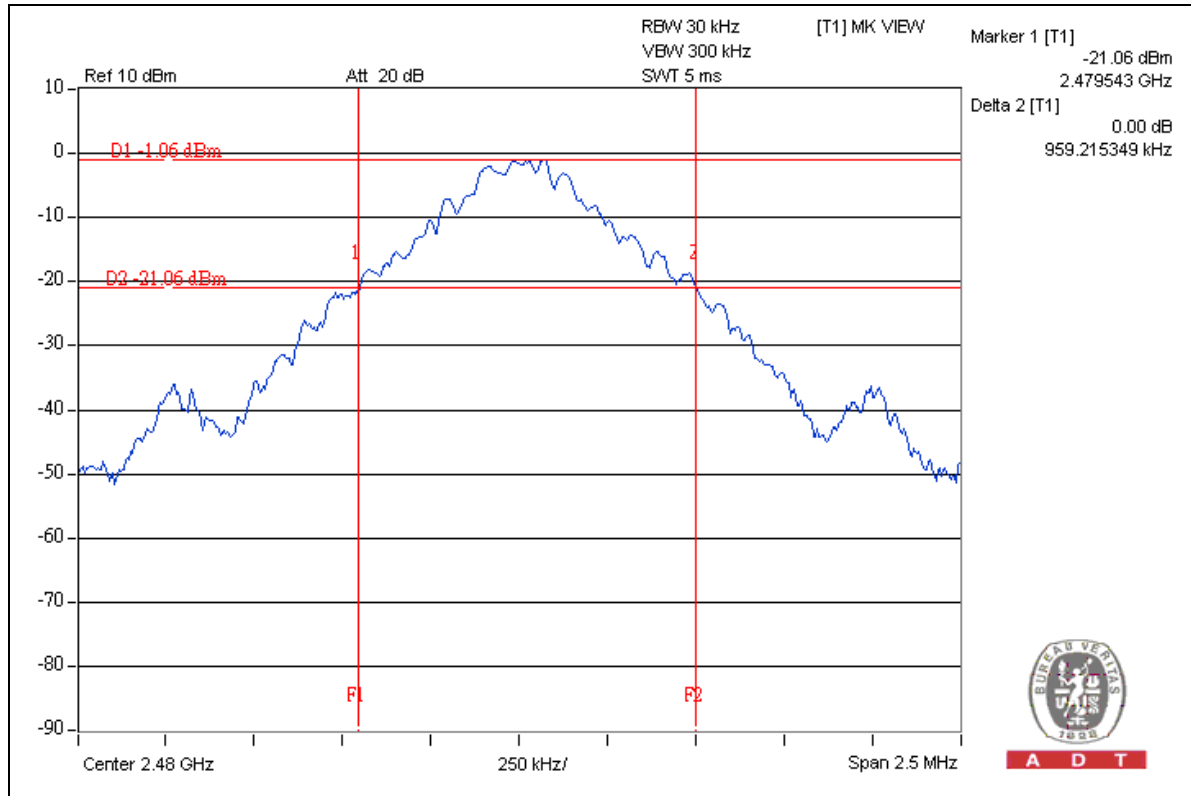

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Apr. 3, 2009	Apr. 2, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP



4.6.6 TEST RESULTS

SERIAL NO.	137		
INPUT POWER	1.5Vdc	CHANNEL	0, 39, 78
ENVIRONMENTAL CONDITIONS	24deg. C, 70% RH, 1005hPa	TESTED BY	Chad Lee


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.001	0.954	PASS
39	2441	1.002	0.982	PASS
78	2480	1.001	0.959	PASS

NOTE: The minimum limit is 20dB bandwidth. Test results please refer to next two pages.




A D T

CH 0

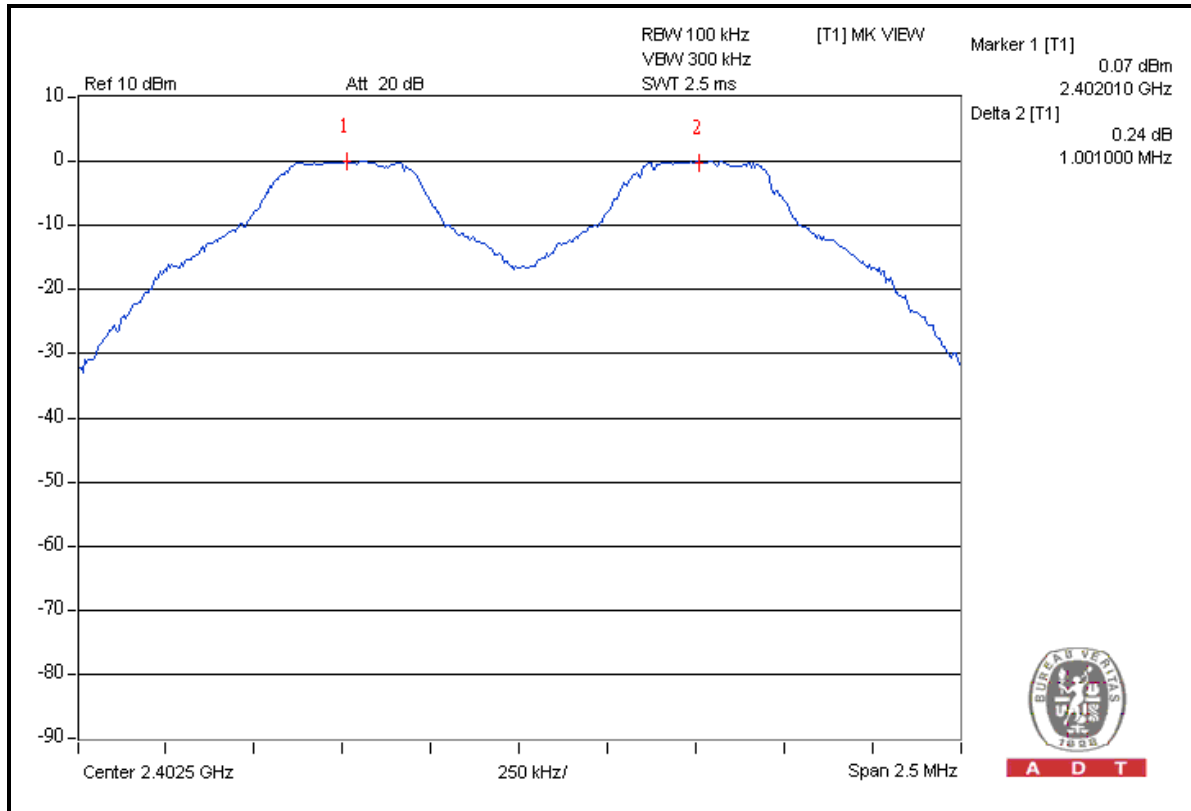


CH 39

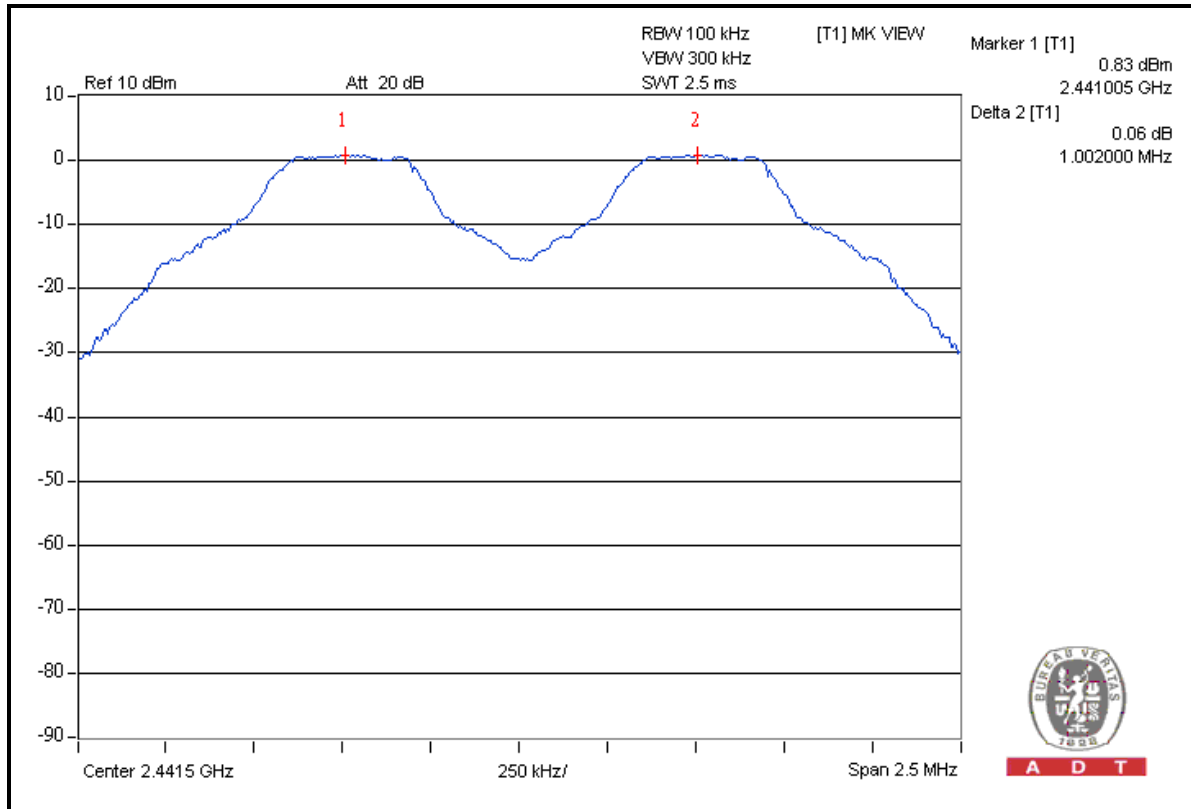



A D T

CH 78

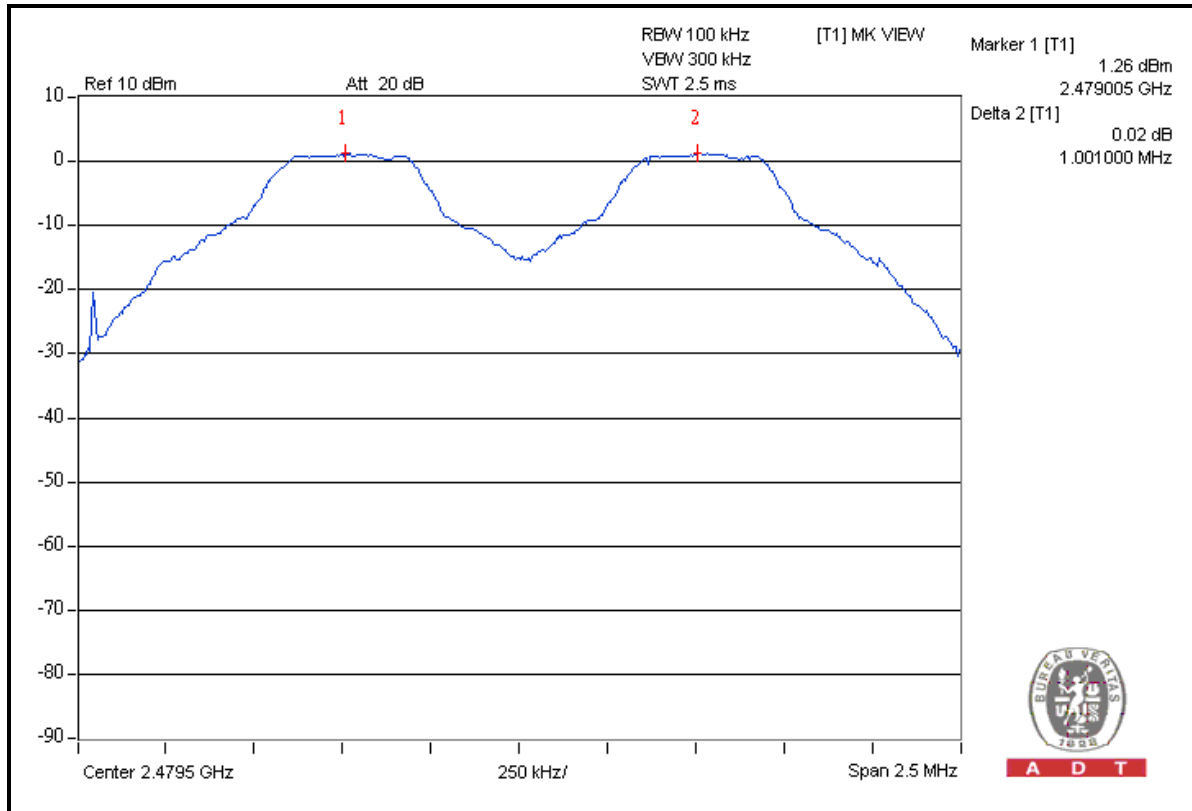

A D T

4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.7.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Apr. 3, 2009	Apr. 2, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS


SERIAL NO.	137		
INPUT POWER	1.5Vdc	CHANNEL	0, 39, 78
ENVIRONMENTAL CONDITIONS	24deg. C, 70% RH, 1005hPa	TESTED BY	Chad Lee

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	1.117	0.48	30	PASS
39	2441	1.349	1.30	30	PASS
78	2480	1.521	1.82	30	PASS




A D T

CH 0

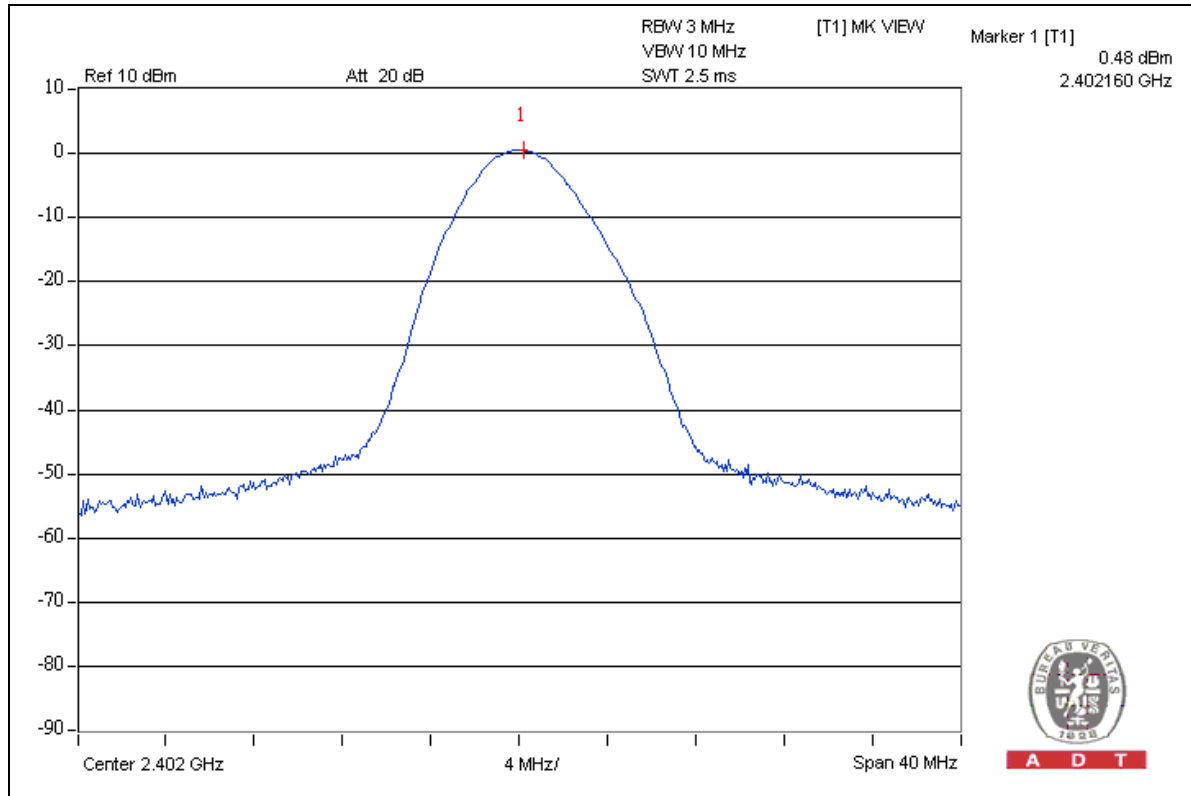

A D T

CH 39

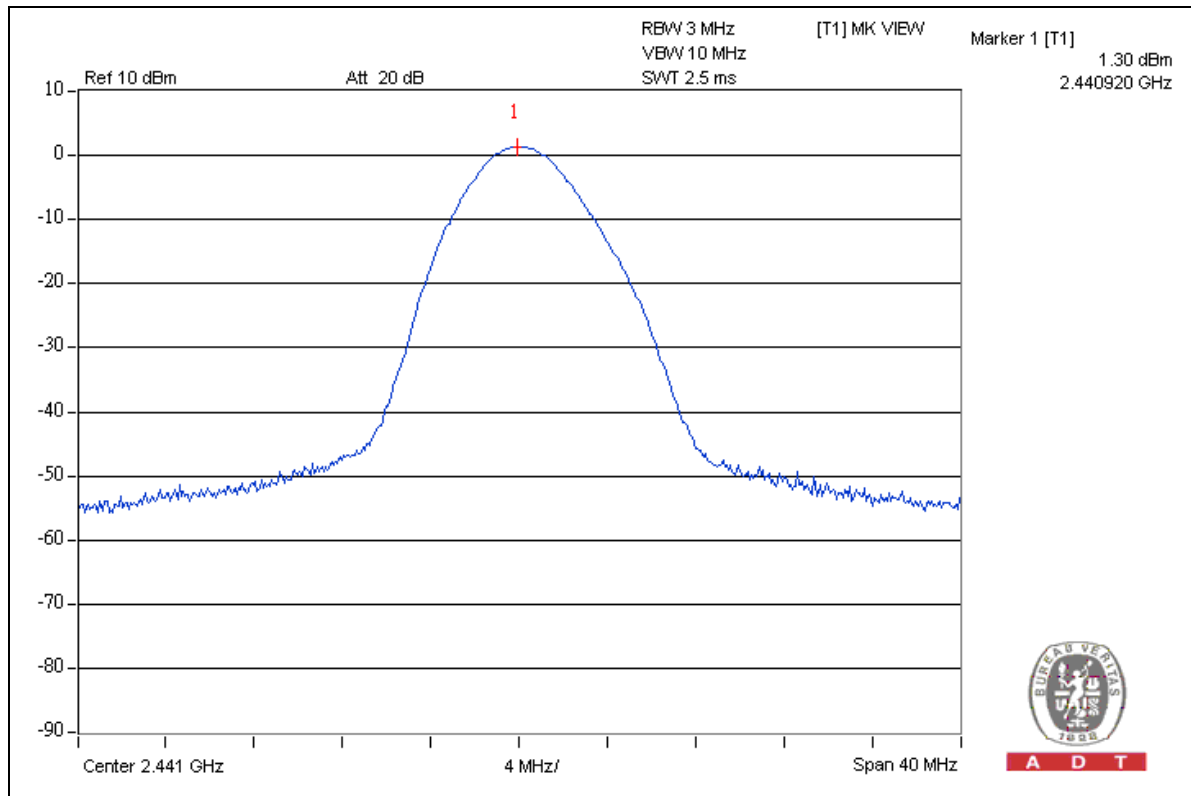


A D T



A D T

CH 78

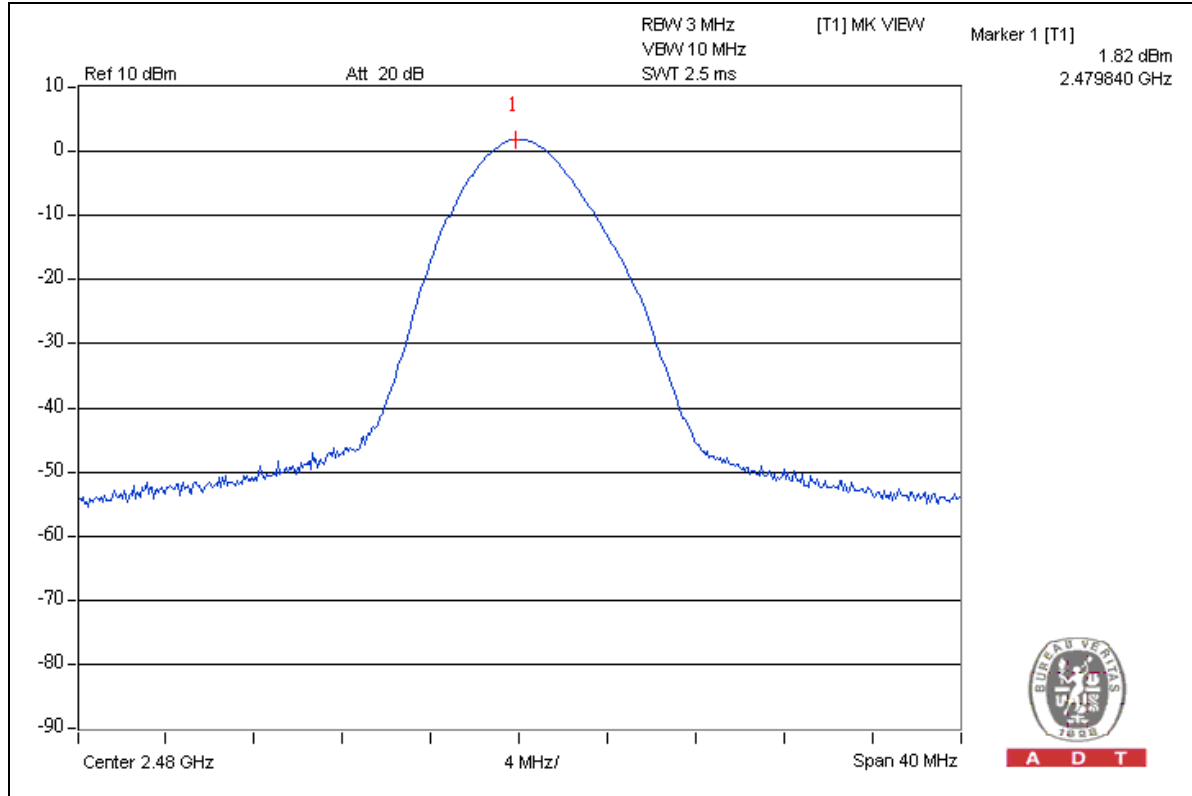

A D T

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Apr. 3, 2009	Apr. 2, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

FOR SERIAL NO.: 137

NOTE 1:

The band edge emission plot on the next page shows 58.62dBc between carrier maximum power and local maximum emission in restrict band (2.3454GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 99.19dBuV/m (Peak), so the maximum field strength in restrict band is $99.19 - 58.62 = 40.57$ dBuV/m, which is under 74 dBuV/m limit.

Average value = $40.57 - 34.5 = 6.07$ dBuV/m, which is under 54dBuV/m limit.

*The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 3$ per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.

Average value = peak reading - 34.5.

NOTE 2:

The band edge emission plot on the next second page shows 57.69dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 101.87dBuV/m (Peak), so the maximum field strength in restrict band is $101.87 - 57.69 = 44.18$ dBuV/m, which is under 74 dBuV/m limit.



Average value = $44.18 - 34.50 = 9.68$ dBuV/m, which is under 54dBuV/m limit.

*The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 3$ per 247 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.5$ dB.

Average value = peak reading - 34.5.





A D T

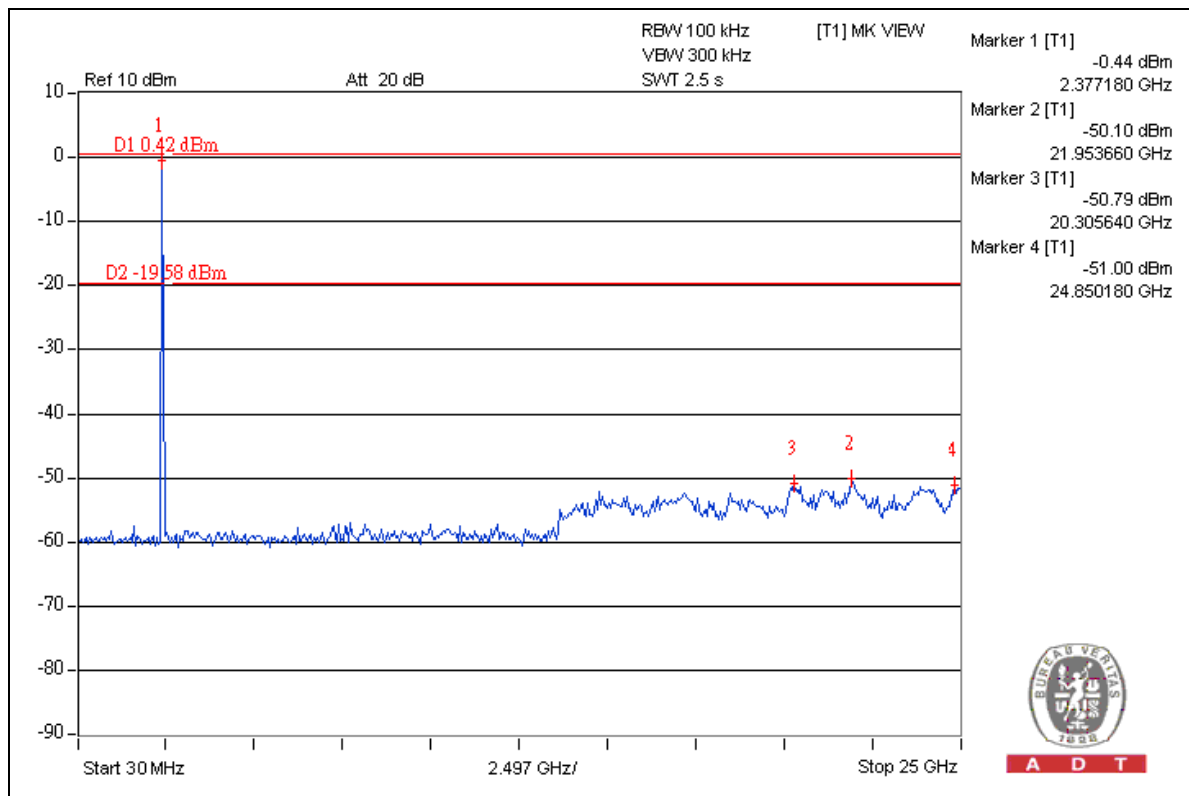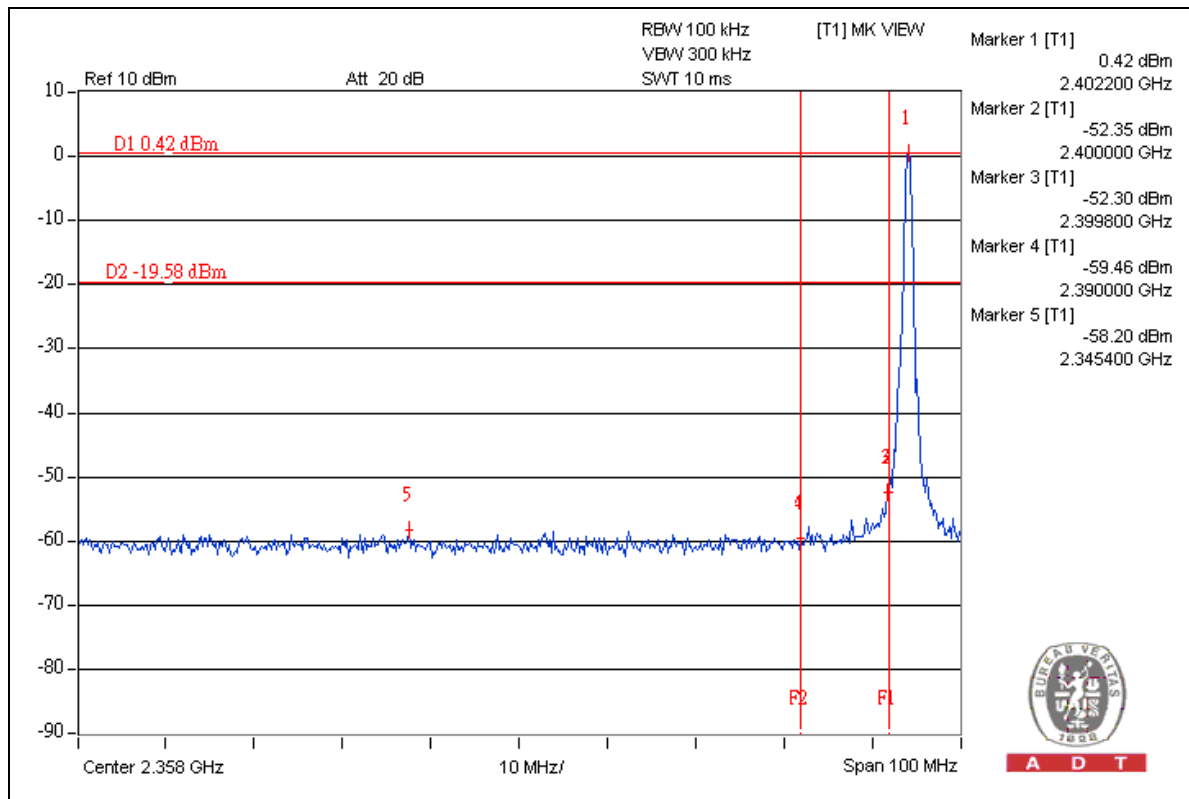



A D T

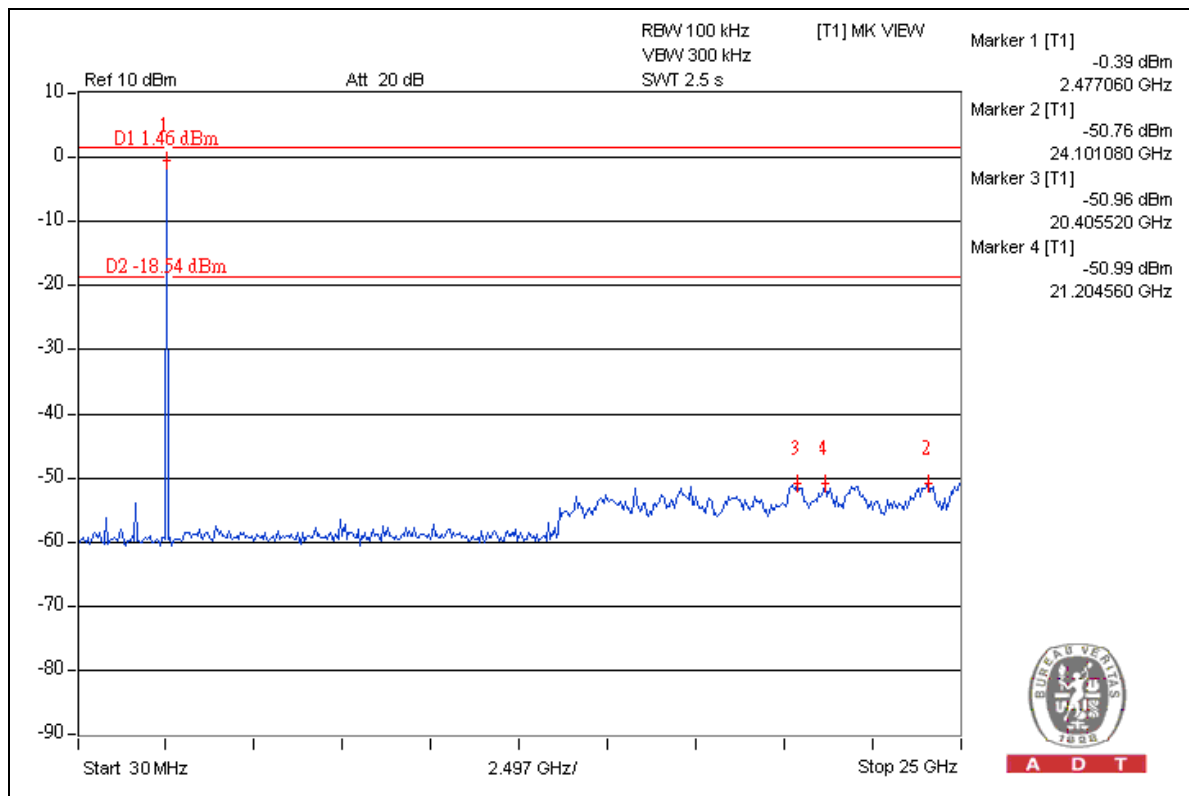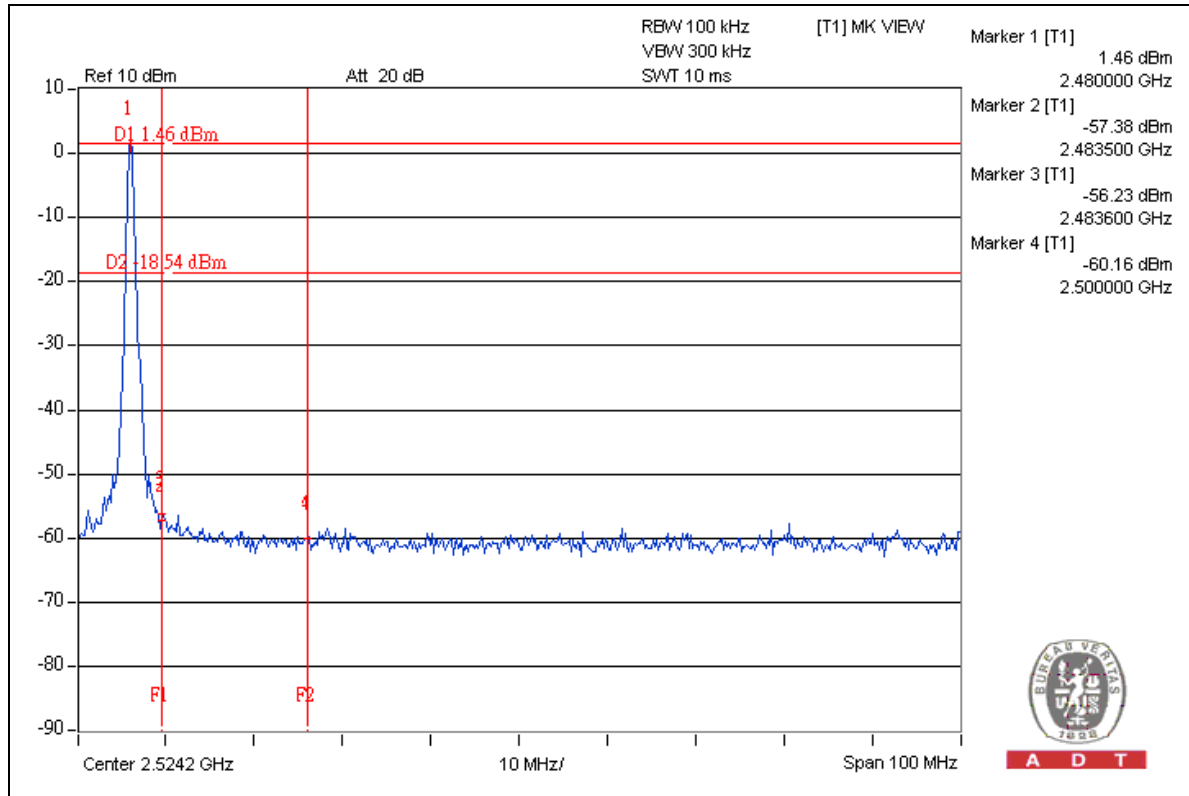

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without antenna connector. The maximum gain of this antenna is 0.81dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---