



**FCC 47 CFR PART 15 SUBPART C &
INDUSTRY CANADA RSS-210**

TEST REPORT

For

802.11 b/g/n WLAN Client

Model: 1399

Trade Name: Microsoft

Issued to

**Microsoft Corporation
One Microsoft Way, Redmond, WA 98052**

Issued by

**Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	8
4.3 MEASUREMENT UNCERTAINTY	9
5. FACILITIES AND ACCREDITATIONS.....	10
5.1 FACILITIES	10
5.2 EQUIPMENT.....	10
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	10
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT	12
7. APPLICABLE RULES FOR INDUSTRY CANADA RSS-210	13
8. FCC PART 15.247 REQUIREMENTS & RSS-210 REQUIREMENTS.....	19
8.1 99% BANDWIDTH	19
8.2 6DB BANDWIDTH.....	27
8.3 PEAK POWER.....	35
8.4 BAND EDGES MEASUREMENT	37
8.5 PEAK POWER SPECTRAL DENSITY	70
8.6 SPURIOUS EMISSIONS.....	78
8.7 RADIATED EMISSIONS	85
8.8 POWERLINE CONDUCTED EMISSIONS.....	115
APPENDIX I RADIO FREQUENCY EXPOSURE.....	118
APPENDIX II PHOTOGRAPHS OF TEST SETUP.....	121
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: Microsoft Corporation
One Microsoft Way, Redmond, WA 98052

Manufacturer: Atheros Communications
5480 Great America Parkway, Santa Clara, CA 95054

Equipment Under Test: 802.11 b/g/n WLAN Client

Trade Name: Microsoft

Model: 1399

Date of Test: August 20 ~ October 7, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C & Industry Canada RSS-210 Issue 7 June, 2007	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 and Industry Canada RSS-210.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	802.11 b/g/n WLAN Client			
Trade Name	Microsoft			
Model Number	1399			
Model Discrepancy	N/A			
Power Supply	Powered by host device			
Frequency Range	2412 ~ 2462 MHz			
Transmit Power	Mode	Frequency Range	Output Power (dBm)	Output Power (mW)
	802.11b	2412 - 2462	19.36	86.2979
	802.11g	2412 - 2462	25.12	325.0873
	802.11n Standard-20 MHz	2412 - 2462	25.09	322.8494
	draft 802.11n Wide-40 MHz	2422 - 2452	21.16	130.6171
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)			
Number of Channels	IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels			
Antenna Specification	Monopole Antenna / Gain: 2.92 dBi PIFA Antenna / Gain: 3 dBi			

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **C3K1399** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

The tests documented in this report were performed in accordance with IC RSS-210, IC RSS-Gen, IC RSS-102, IC RSS-212, and ANSI C63.4.

This submittal(s) (test report) is intended for IC Certification with Industry Canada RSS-210.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The tests documented in this report were performed in accordance with IC RSS-210, IC RSS-Gen, IC RSS-102, and ANSI C63.4.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: 1399) had been tested under operating condition.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Power Meter	Agilent	E4416A	GB41291611	06/27/2011
Power Sensor	Agilent	E9327A	US40441097	06/27/2011

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/25/2011
EMI Test Receiver	R&S	ESCI	100064	02/04/2011
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2011
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/20/2010
Bilog Antenna	Sunol Sciences	JB3	A030105	09/10/2011
Horn Antenna	EMCO	3117	00055165	12/07/2010
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/31/2010
Test S/W	EZ-EMC (CCS-3A1RE)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/08/2011
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/22/2011
EMI Test Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/26/2011
Pulse Limit	ROHDE & SCHWARZ	ESH3-Z2	100117	09/16/2011
N Type Coaxial Cable	BELDEN	8268 M17/164	003	07/09/2011



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.7468
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

☒ No.989-1, Wenshan Rd., Qionglin Township, Hsinchu County 307, Taiwan (R.O.C.)

Tel: +886-3-5921698

Remark: The powerline conducted emissions items was tested at Compliance Certification Services Inc. (Hsinchu Lab.) The test equipments were listed in page 8 and the test data, please refer page 116-117.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.




All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	HP	dv6-1332TX	CNF9491GM9	PD9112BNHU	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Notebook PC	Lenovo ideaPad	S10e_4068-RZ1	L3CEV2D	HFS-FL	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3.	Test Kit	N/A	N/A	N/A	N/A	N/A	N/A

Remark:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. APPLICABLE RULES FOR INDUSTRY CANADA RSS-210

RSS-210 §2 General Certification Requirements and Specifications

RSS-210 §2.1 Frequency Stability

When the carrier frequency stability is not specified, it need not be tested, provided that the carrier frequency is chosen such that the fundamental modulation products (meaning the nominal bandwidth) lie totally within the bands listed in Tables 2, 3, 4 and 5 and do not fall into any restricted band listed in Table 1. Due account shall be taken of carrier frequency drift as a result of aging, temperature, humidity, and supply voltage variations when using frequencies near the band edges.

RSS-210 §2.2 Restricted Bands and Unwanted Emission Frequencies

Restricted bands, identified in Table 1, are designated primarily for safety-of-life services (distress calling and certain aeronautical bands), certain satellite downlinks, radio astronomy, and some government uses. Except where otherwise indicated, the following restrictions apply:

- (a) Fundamental components of modulation of LPDs shall not fall within the restricted bands of Table 1.
- (b) Unwanted emissions falling into restricted bands of Table 1 shall meet Tables 2 and 3 limits. It should also be noted that unwanted emissions falling in non-restricted bands do not need to be suppressed to a level lower than the Table 2 and 3 limits.
- (c) Unwanted emissions not falling within restricted frequency bands may also use the limits specified in the applicable annex.

RSS-210 §2.3 Licence-exempt Receivers

Category I licence-exempt receivers are required to have their spurious emissions comply with Section 7.2.3 of RSS-Gen.

RSS-210 §2.6 General Field Strength Limits

Table 2 and 3 list the permissible levels of unwanted emissions of transmitters and receivers. However, transmitters with field strengths that do not exceed the limits in these tables may also operate in these frequency bands, other than the restricted bands of Table 1 and the TV bands (i.e. unwanted emissions of transmitters and receivers are permitted to fall into Table 1 and TV frequencies but intentional emissions are prohibited). See the note of Table 2 for further details.

**RSS-210 §2.7 Tables****RSS-210 Table 1: Restricted Frequency Bands** ^(Note)

MHz	MHz	MHz	MHz	GHz
0.090-0.110	8.37625-8.38675	--	1718.8-1722.2	9.0-9.2
--	8.41425-8.41475	156.52475-156.52525	2200-2300	9.3-9.5
2.1735-2.1905	12.29-12.293	156.7-156.9	2310-2390	10.6-12.7
3.020-3.026	12.51975-12.52025	--	--	13.25-13.4
4.125-4.128	12.57675-12.57725	--	2655-2900	14.47-14.5
4.17725-4.17775	13.36-13.41	240-285	3260-3267	15.35-16.2
4.20725-4.20775	16.42-16.423	322-335.4	3332-3339	17.7-21.4
5.677-5.683	16.69475-16.69525	399.9-410	3345.8-3358	22.01-23.12
6.215-6.218	16.80425-16.80475	608-614	3500-4400	23.6-24.0
6.26775-6.26825	25.5-25.67	960-1427	4500-5150	31.2-31.8
6.31175-6.31225	37.5-38.25	1435-1626.5	5350-5460	36.43-36.5
8.291-8.294	73-74.6; 74.8-75.2	1645.5-1646.5	7250-7750	Above 38.6
8.362-8.366	108-138	1660-1710	8025-8500	

Note: Certain frequency bands listed in Table 2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard as well as RSS-310.

RSS-210 Table 2: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz ^(Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: Transmitting devices are not permitted in Table 1 bands or in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz, and 614-806 MHz). Prohibition of operation in TV bands does not apply to momentary devices, or to medical telemetry devices in the band 174-216 MHz, and to perimeter protection systems in the bands 54-72 and 76-88 MHz. The perimeter protection devices are to meet Table 3 field strengths limits.

**RSS-210 Table 3: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)**

Frequency (fundamental or spurious)	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in Hz)	300
490-1.705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

RSS-210 §Annex 8: Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands

This section applies to systems that employ frequency hopping (FH) and digital modulation technology in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. Systems in these bands may employ frequency hopping, digital modulation and or a combination (hybrid) of both techniques.

A frequency hopping system that synchronizes with another or several other systems (to avoid frequency collision among them) via off-air sensing or via connecting cables is not hopping randomly and therefore is not in compliance with RSS-210.

RSS-210 §A8.2 Digital Modulation Systems

These include systems employing digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to all three bands.

RSS-210 §A8.4 Transmitter Output Power and e.i.r.p. Requirements

(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum peak conducted power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power (see RSS-Gen)

(5) Point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W, provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omni-directional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding 4 W e.i.r.p. However, remote stations of point-to-multipoint systems shall be allowed to operate at greater than 4 W e.i.r.p. under the same conditions as for point-to-point systems.

Note: “Fixed, point-to-point operation”, excludes point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information.

**RSS-210 §A8.5 Out-of-band Emissions**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

RSS-Gen §2 General Information

Unless otherwise indicated, radiocommunications equipment is subject to licensing pursuant to subsection 4(1) of the *Radiocommunication Act*.

RSS-Gen §2.1.2 Category II Equipment

Category II equipment comprises radio devices where a standard has been prescribed but for which a TAC is not required, that is, equipment certification by Industry Canada or a Certification Body (CB) is not required (certification exempt), pursuant to subsection 4(3) of the *Radiocommunication Act*. The manufacturer or importer shall nevertheless ensure that the standards are complied with. A test report shall be available on request and the device shall be properly labelled.

RSS-Gen §2.2 Receivers

Radiocommunication receivers are defined as Category I equipment or Category II equipment by the characteristics outlined below.

RSS-Gen §2.2.1 Category I Equipment Receivers

A receiver is classified as Category I equipment if it meets one of the following conditions:

- (a) is a stand-alone receiver that is tunable to any frequency in the band 30-960 MHz;
- (b) is a receiver that is associated with Category I transmitters; or
- (c) is a scanner receiver.

Except for scanner receivers, which have their own RSSs, Category I receivers shall comply with the limits for receiver spurious emissions set out in Section 6 of this RSS-Gen, and shall be certified under the RSS applicable to the transmitter type with which the receiver is associated or designed to operate (NOT under RSS-Gen).

RSS-Gen §2.2.2 Category II Equipment Receivers

A receiver is classified as Category II equipment if it is not meeting the conditions of Section 2.2.1.

RSS-Gen §2.2.3 Licence-exempt Receivers

Paging receivers, “receive-only” earth stations operating with satellites approved by Industry Canada, and stand-alone receivers which are exempted from licensing, can be classified as either Category I or Category II. These receivers shall comply with the requirements of RSS-210 or RSS-310, respectively.

**RSS-Gen §2.3 Licence-exempt Low-power Radiocommunication Devices (LPDs)**

Licence-exempt low-power radiocommunication devices are devices which have intentional and unwanted emissions of very low signal levels such that they can co-exist with licensed radio services. LPDs are required to operate on a “**no-interference no-protection**” basis (i.e. they may not cause radio interference and cannot claim protection from interference). The requirements for LPDs are generally described in Section 7.

RSS-Gen §5.5 Exposure of Humans to RF Fields

Before equipment certification is granted, the applicable requirements of RSS-102 shall be met.

RSS-Gen §6 Receiver Spurious Emission Standard

The following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

RSS-Gen Table 1 - Spurious Emission Limits for Receivers

Frequency (MHz)	Field Strength microvolts/m at 3 metres
30-88	100
88-216	150
216-960	200
Above 960	500

(b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

RSS-Gen §7.1.4 Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

**RSS-Gen §7.2.2 Transmitter and Receiver AC Power Lines Conducted Emission Limits**

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

RSS-Gen Table 2 – AC Power Lines Conducted Emission Limits

Frequency Range (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50


**Decreases with the logarithm of the frequency*



8. FCC PART 15.247 REQUIREMENTS & RSS-210 REQUIREMENTS

8.1 99% BANDWIDTH

Test Configuration



TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	14.7821
Mid	2437	14.7480
High	2462	14.7707

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.9168
Mid	2437	16.7832
High	2462	16.9044

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.8680
Mid	2437	17.9048
High	2462	18.3468

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	35.9440
Mid	2437	36.1018
High	2452	35.9966




Test Plot

IEEE 802.11b mode

99% Bandwidth (CH Low)

* Agilent 17:48:05 Oct 7, 2010

R T

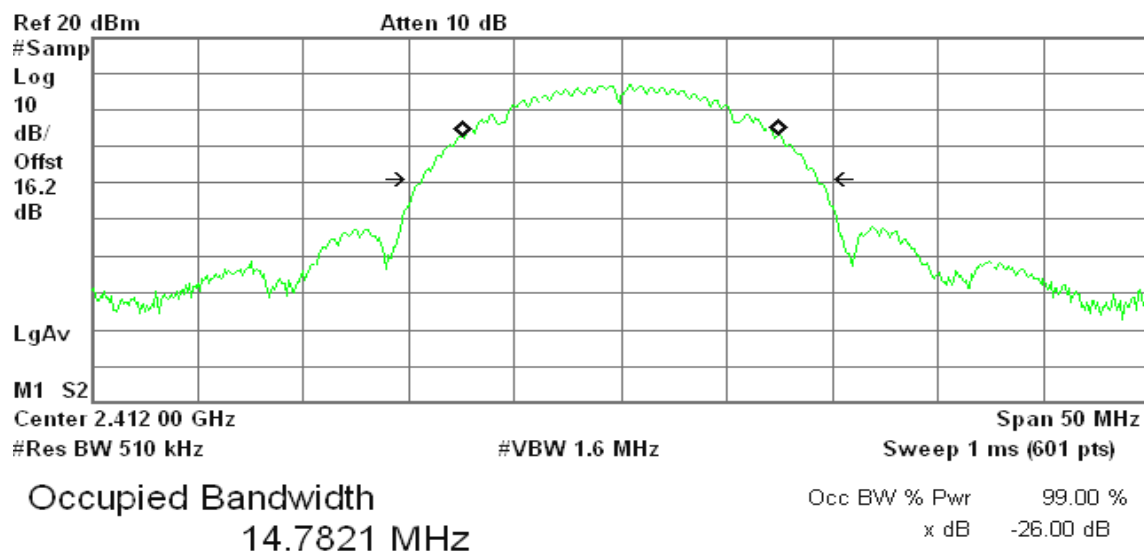


Transmit Freq Error -4.670 kHz

Occupied Bandwidth 18.568 MHz*

99% Bandwidth (CH Mid)

* Agilent 18:00:58 Oct 7, 2010

R T

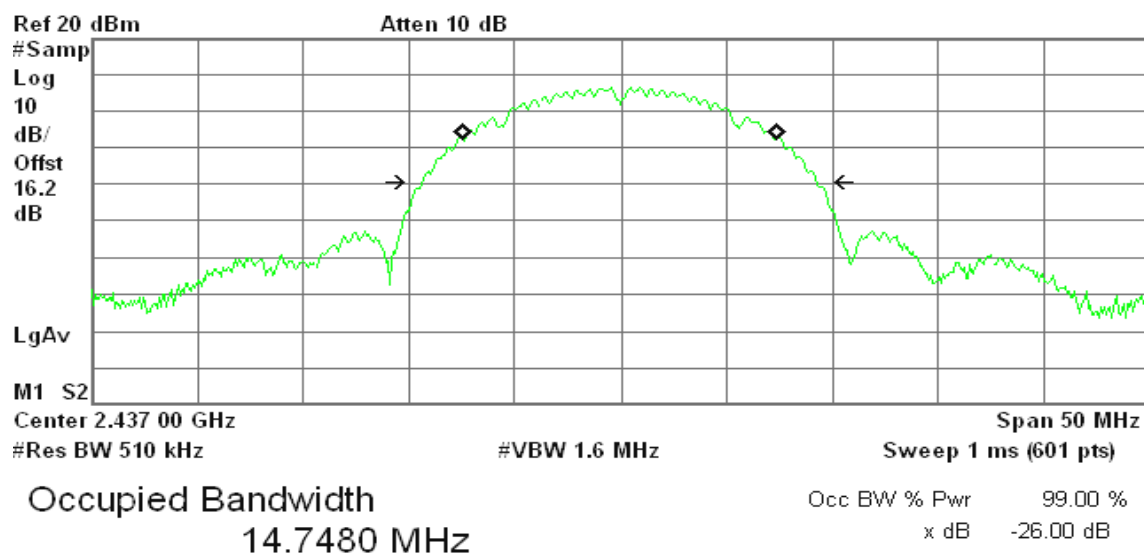


Transmit Freq Error -13.428 kHz

Occupied Bandwidth 18.543 MHz*

**99% Bandwidth (CH High)**

* Agilent 18:06:48 Oct 7, 2010

R T

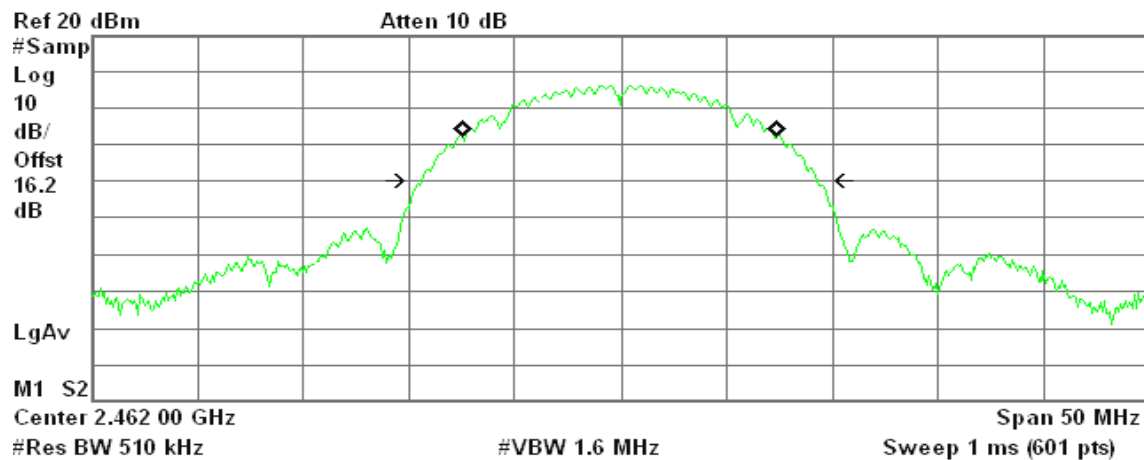

Occupied Bandwidth
14.7707 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -28.149 kHz
Occupied Bandwidth 18.544 MHz*

IEEE 802.11g mode**99% Bandwidth (CH Low)**

* Agilent 18:17:19 Oct 7, 2010

R T

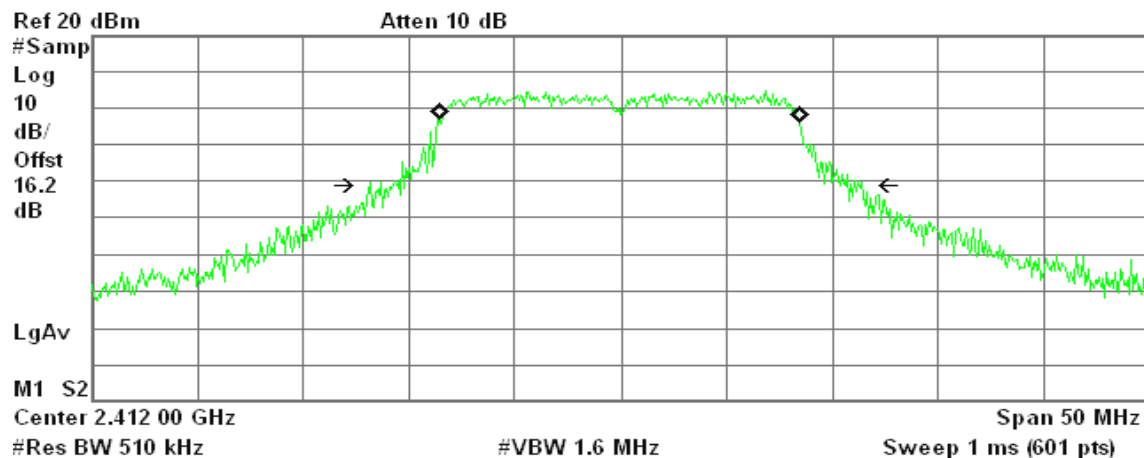

Occupied Bandwidth
16.9168 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -66.687 kHz
Occupied Bandwidth 23.307 MHz*

**99% Bandwidth (CH Mid)**

* Agilent 18:23:12 Oct 7, 2010

R T

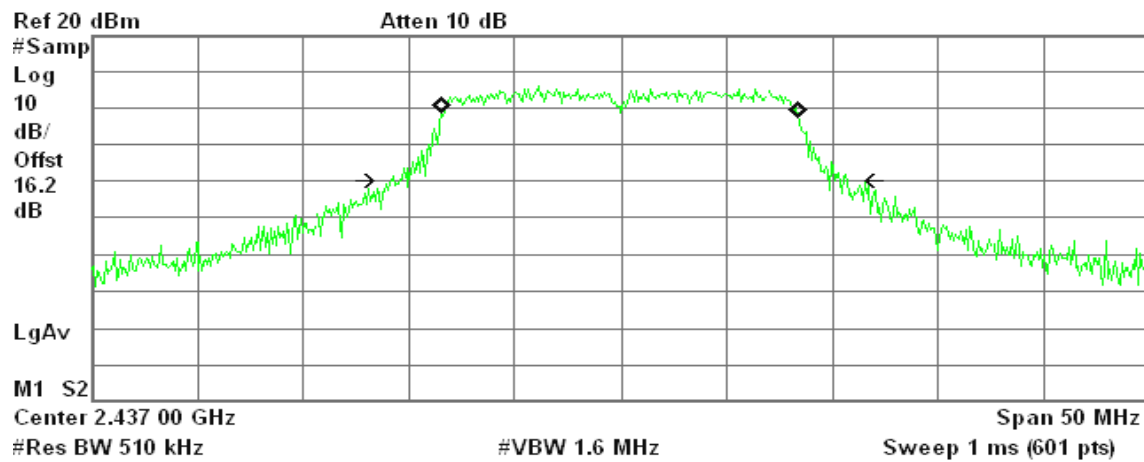

Occupied Bandwidth
16.7832 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -16.811 kHz
Occupied Bandwidth 21.603 MHz*

99% Bandwidth (CH High)

* Agilent 18:37:26 Oct 7, 2010

R T

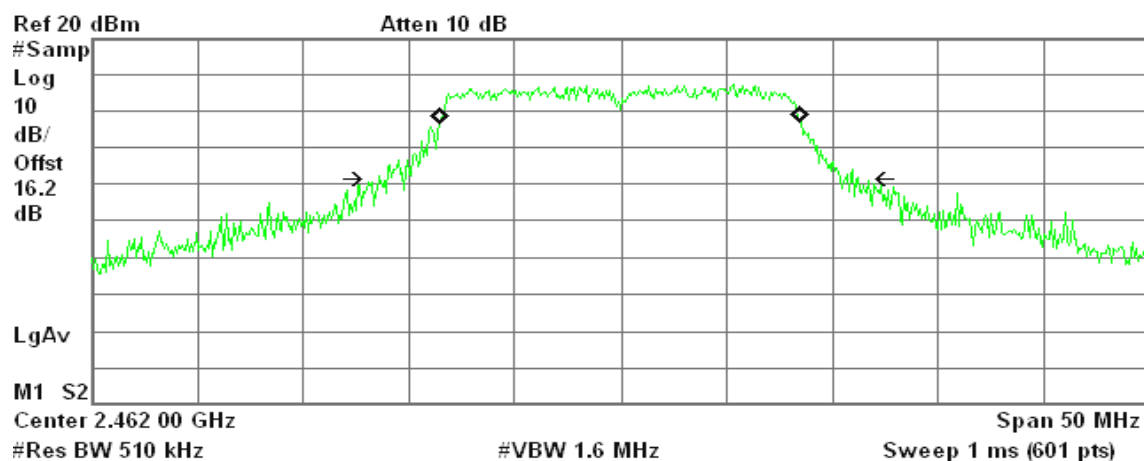

Occupied Bandwidth
16.9044 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -14.037 kHz
Occupied Bandwidth 22.709 MHz*

**draft 802.11n Standard-20 MHz Channel mode****99% Bandwidth (CH Low)**

* Agilent 18:49:17 Oct 7, 2010

R T

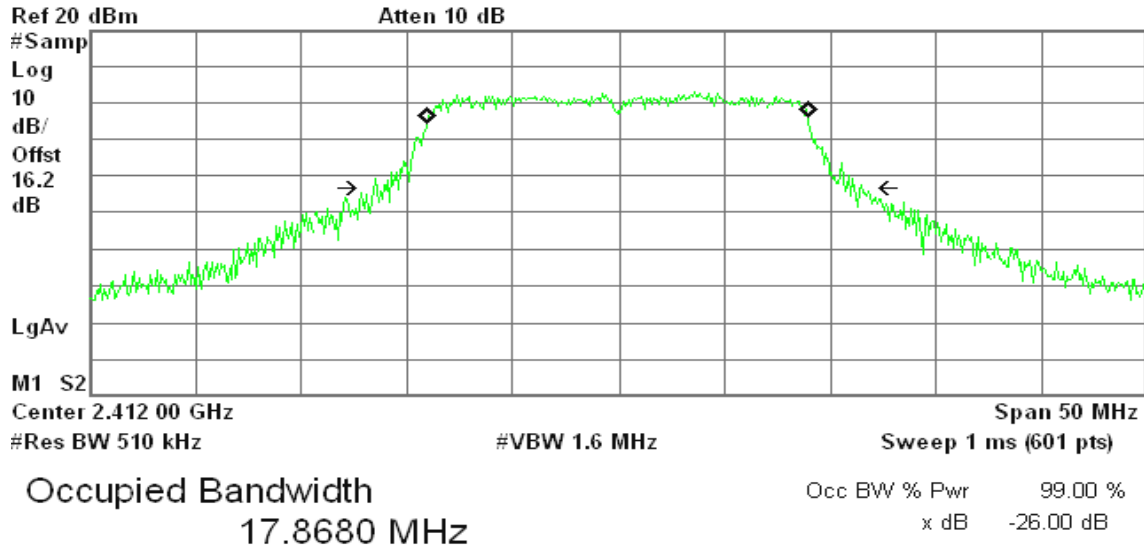


Transmit Freq Error -32.368 kHz
Occupied Bandwidth 23.088 MHz*

99% Bandwidth (CH Mid)

* Agilent 20:33:25 Oct 7, 2010

R T

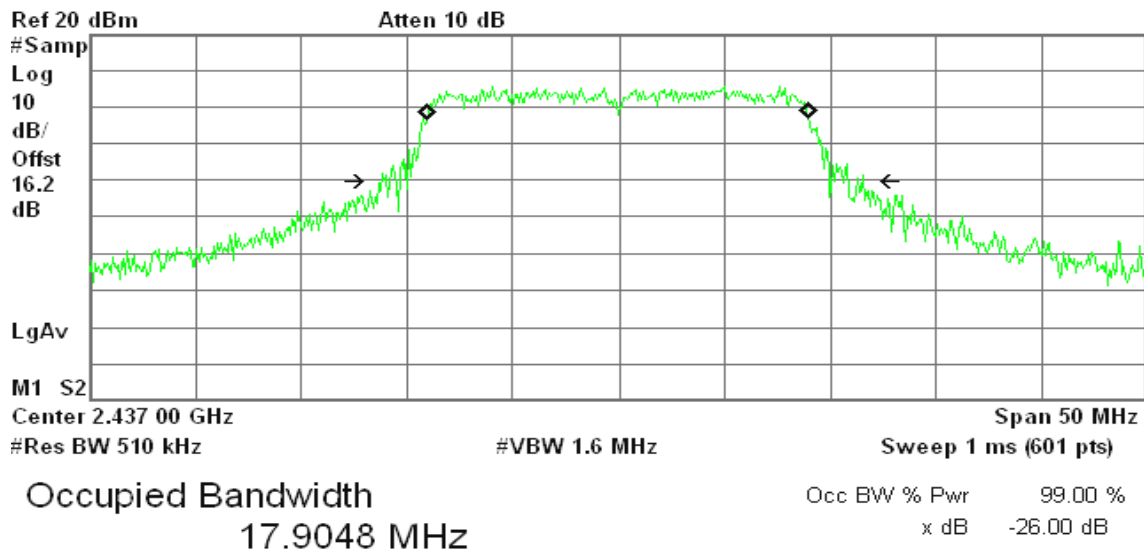


Transmit Freq Error -13.573 kHz
Occupied Bandwidth 22.831 MHz*

**99% Bandwidth (CH High)**

* Agilent 20:41:16 Oct 7, 2010

R T

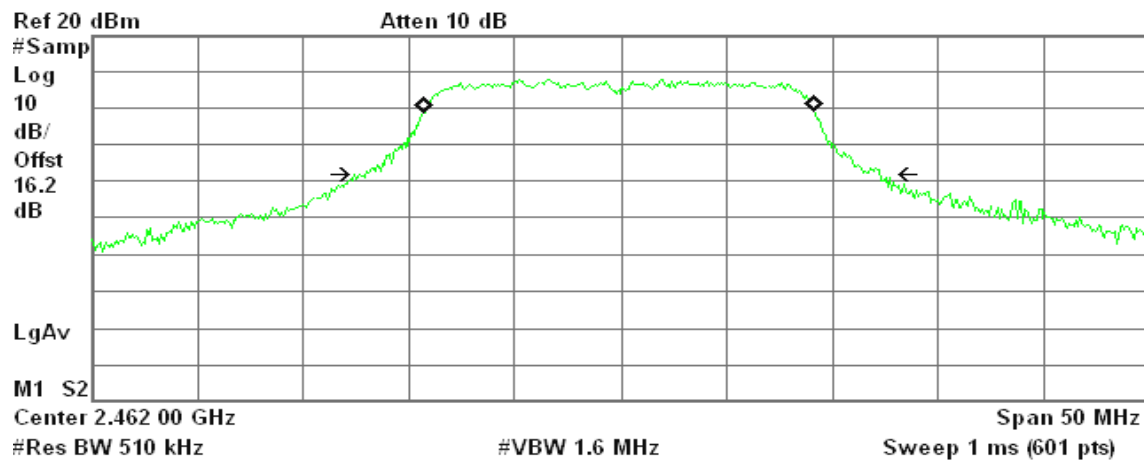


Transmit Freq Error -63.956 kHz

x dB Bandwidth 24.330 MHz*

draft 802.11n Wide-40 MHz Channel mode**99% Bandwidth (CH Low)**

* Agilent 20:49:26 Oct 7, 2010

R T

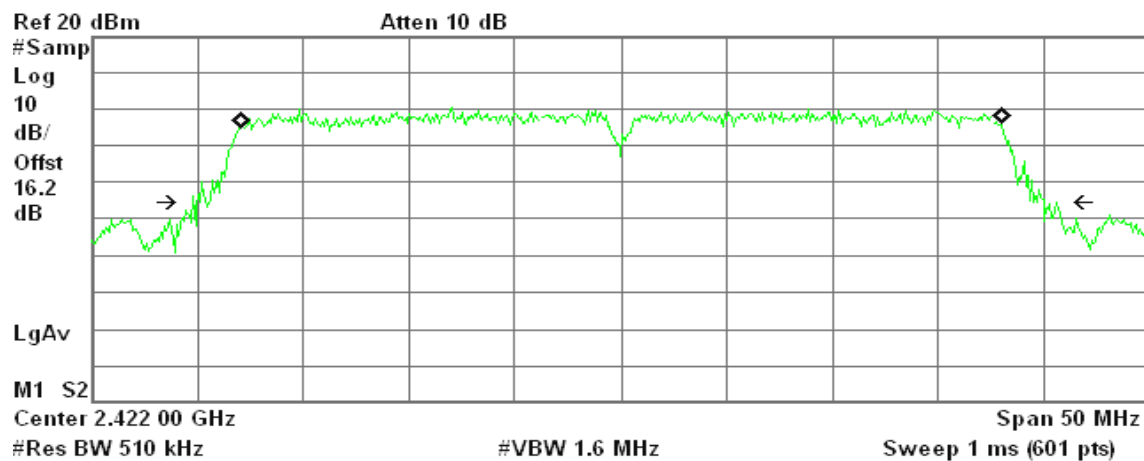


Transmit Freq Error 16.400 kHz

Occupied Bandwidth 40.960 MHz*

**99% Bandwidth (CH Mid)**

* Agilent 20:57:40 Oct 7, 2010

R T

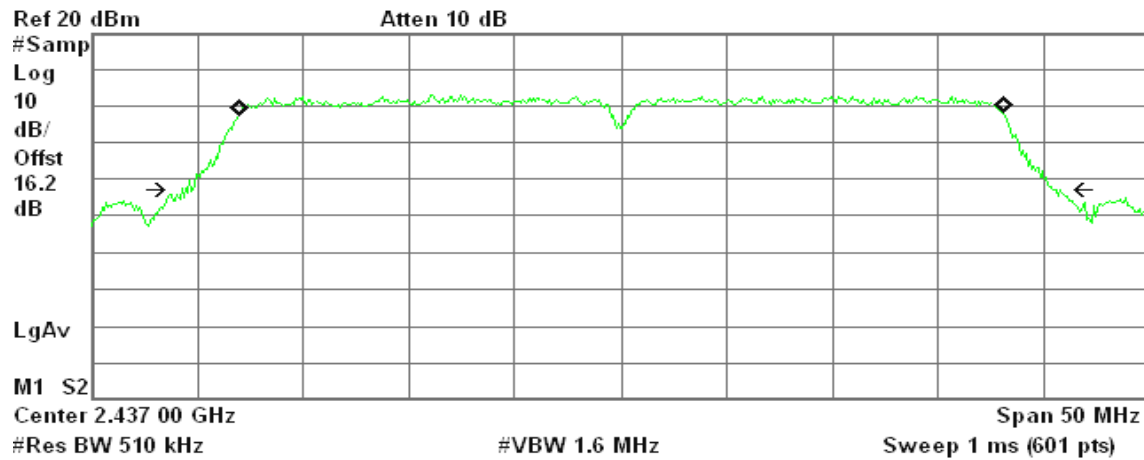

Occupied Bandwidth
36.1018 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 29.788 kHz
x dB Bandwidth 41.449 MHz*

99% Bandwidth (CH High)

* Agilent 21:04:36 Oct 7, 2010

R T

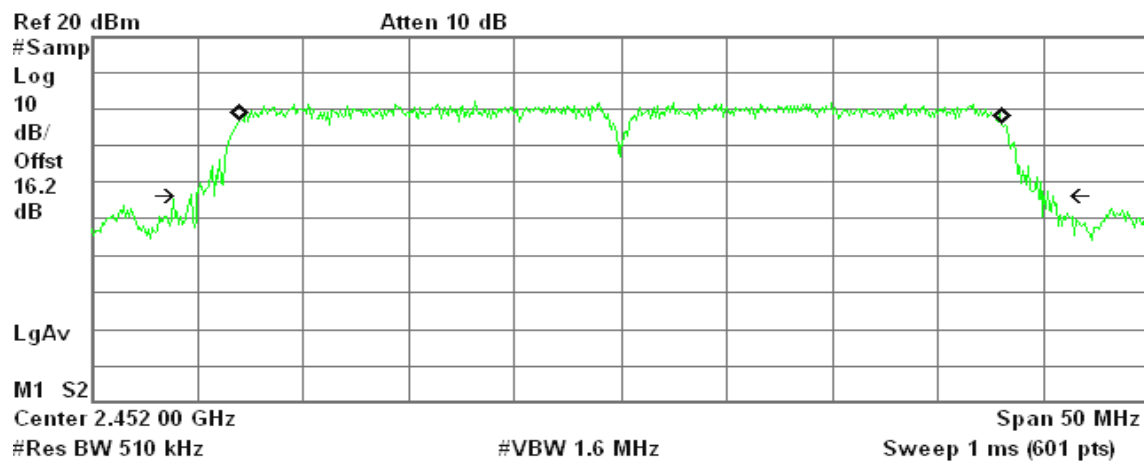

Occupied Bandwidth
35.9966 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -1.568 kHz
Occupied Bandwidth 40.849 MHz*




8.2 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2) & RSS-210 §A8.2(a), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	10170	>500	PASS
Mid	2437	10080		PASS
High	2462	11670		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16080	>500	PASS
Mid	2437	16500		PASS
High	2462	15920		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	17500	>500	PASS
Mid	2437	17000		PASS
High	2462	17580		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	35080	>500	PASS
Mid	2437	35330		PASS
High	2452	34670		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

* Agilent 06:39:55 Oct 7, 2010


R T

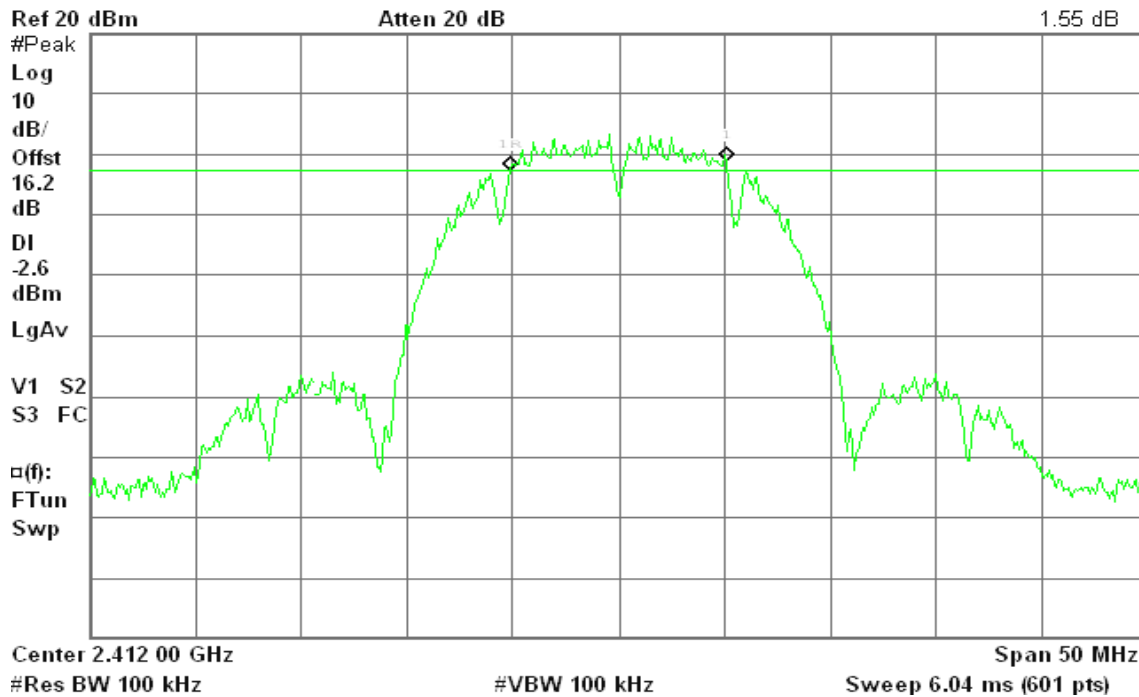 Δ Mkr1 10.17 MHz
1.55 dB

6dB Bandwidth (CH Mid)

* Agilent 06:34:22 Oct 7, 2010


R T

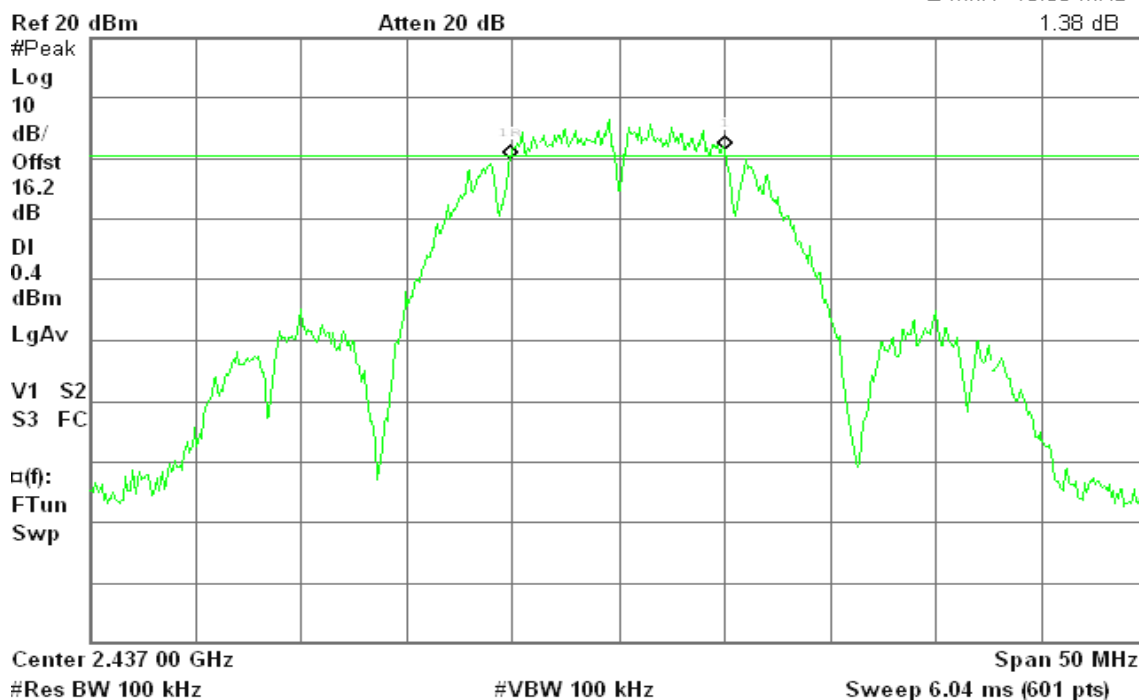 Δ Mkr1 10.08 MHz
1.38 dB

**6dB Bandwidth (CH High)**


* Agilent 06:29:08 Oct 7, 2010

R T

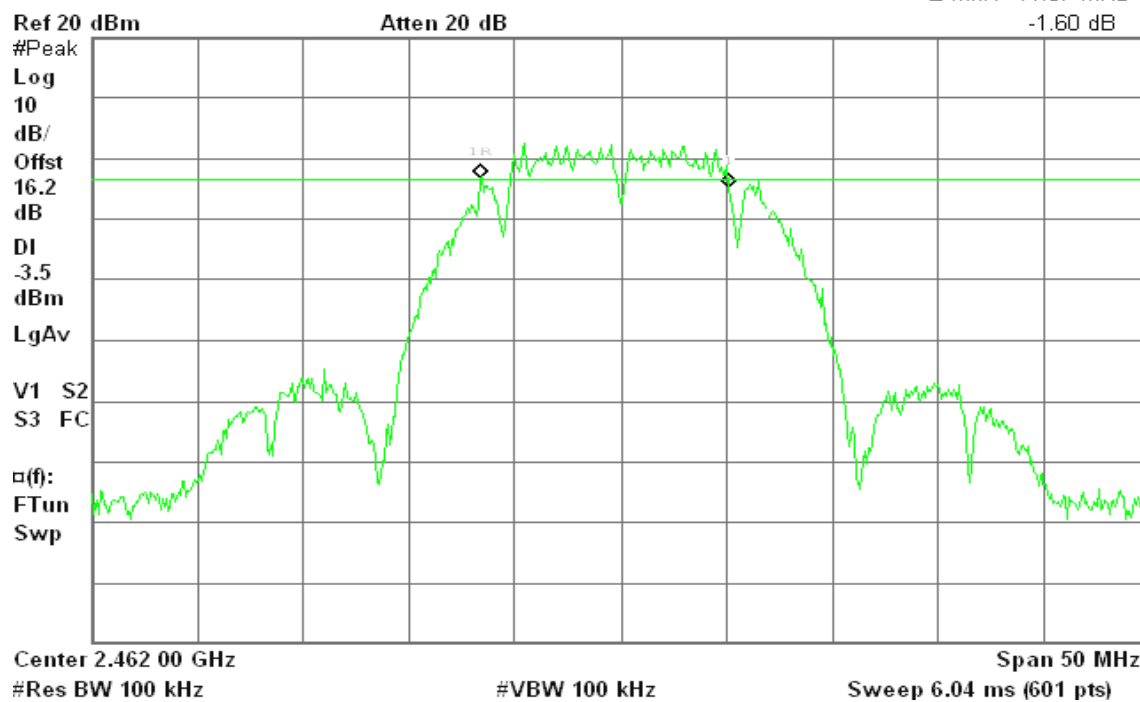 Δ Mkr1 11.67 MHz
-1.60 dB**IEEE 802.11g mode****6dB Bandwidth (CH Low)**

* Agilent 06:18:57 Oct 7, 2010

R T

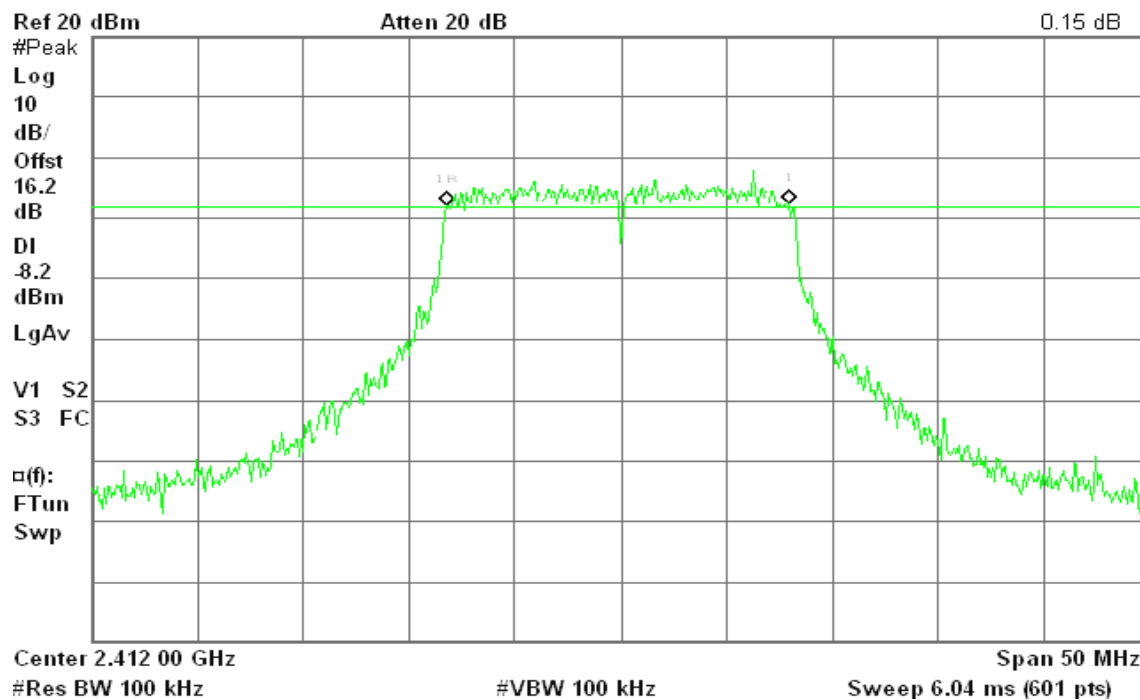 Δ Mkr1 16.08 MHz
0.15 dB




6dB Bandwidth (CH Mid)

* Agilent 06:13:33 Oct 7, 2010

R T

 Δ Mkr1 16.50 MHz

-0.83 dB

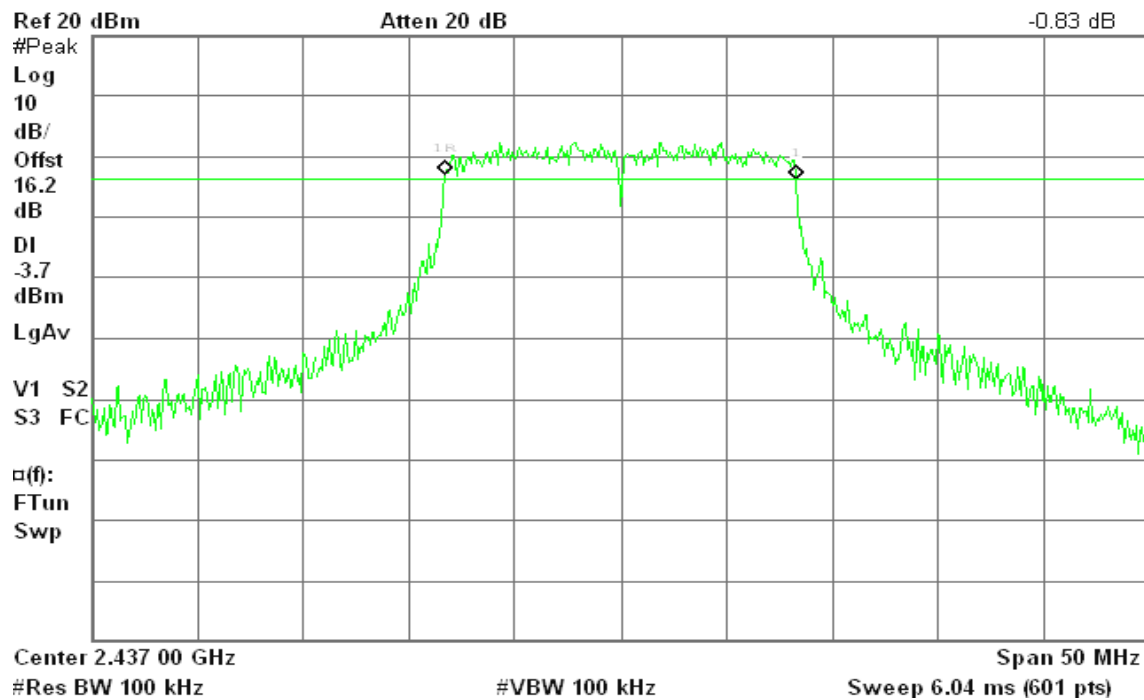


6dB Bandwidth (CH High)

* Agilent 06:24:11 Oct 7, 2010

R T

 Δ Mkr1 15.92 MHz

-0.97 dB

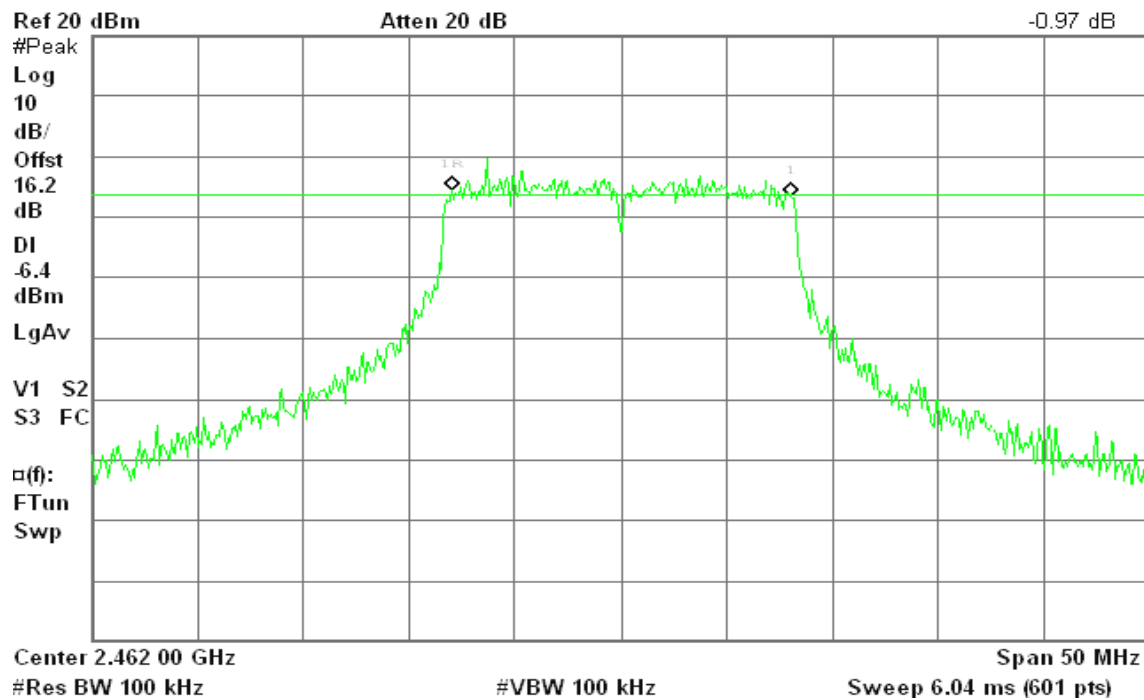




draft 802.11n Standard-20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 06:46:22 Oct 7, 2010


R T

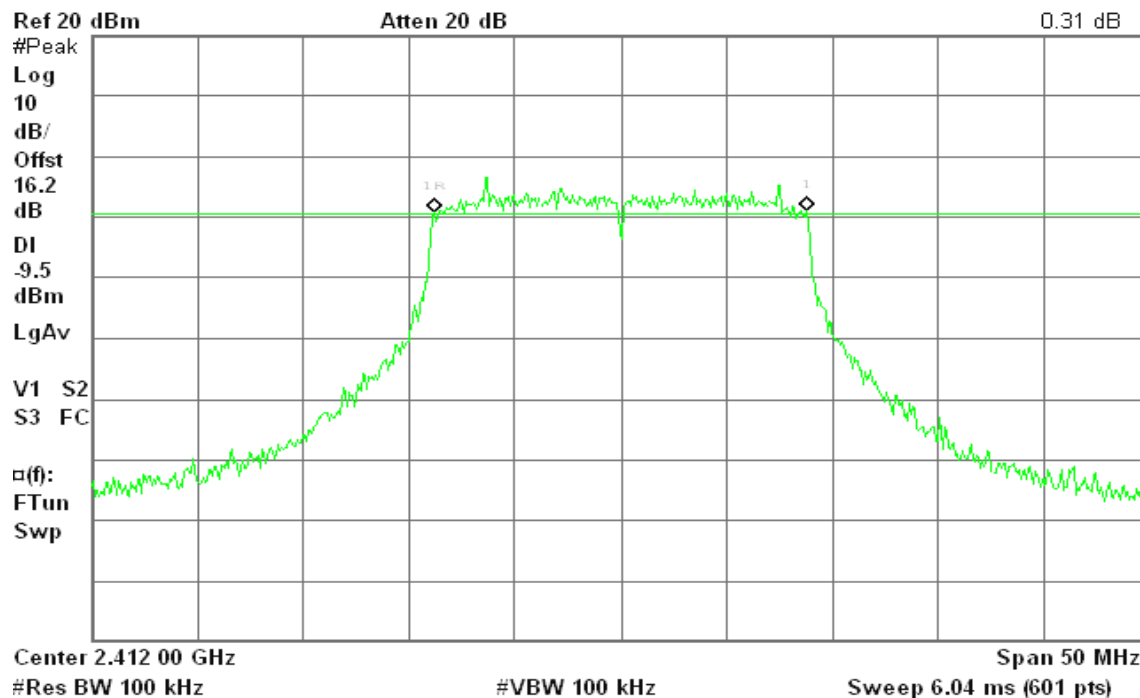 Δ Mkr1 17.50 MHz
0.31 dB

6dB Bandwidth (CH Mid)

Agilent 06:57:23 Oct 7, 2010

R T

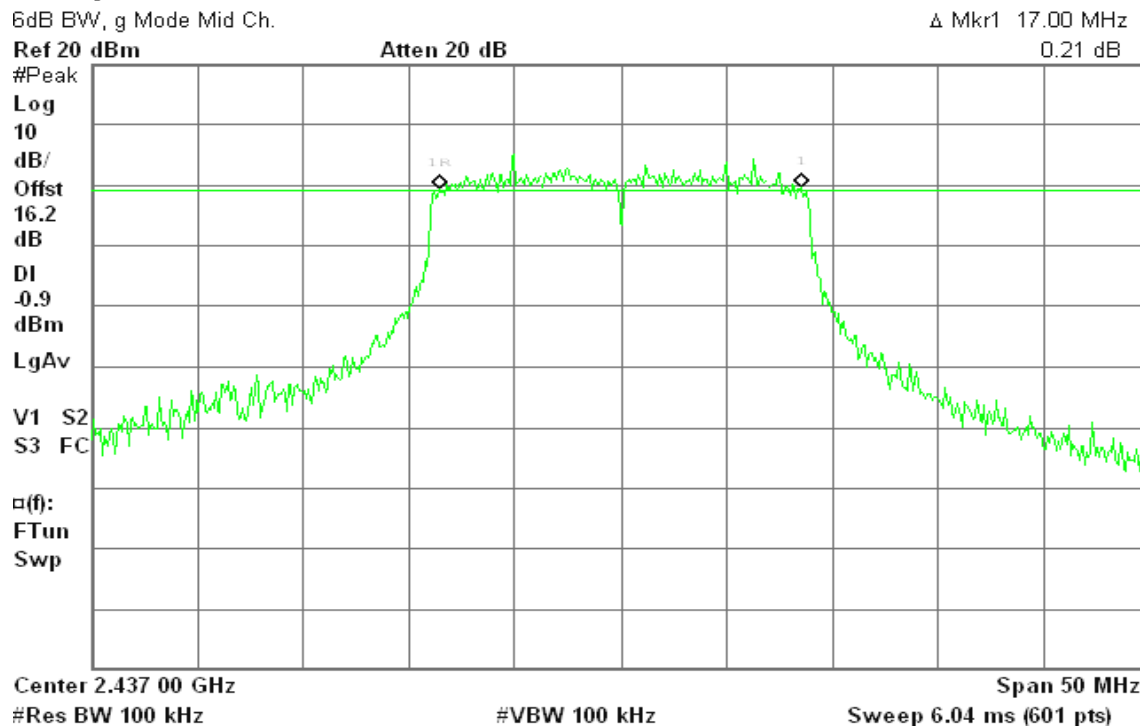 Δ Mkr1 17.00 MHz
0.21 dB


**6dB Bandwidth (CH High)**

* Agilent 06:52:23 Oct 7, 2010

R L

 Δ Mkr1 17.58 MHz

-0.50 dB

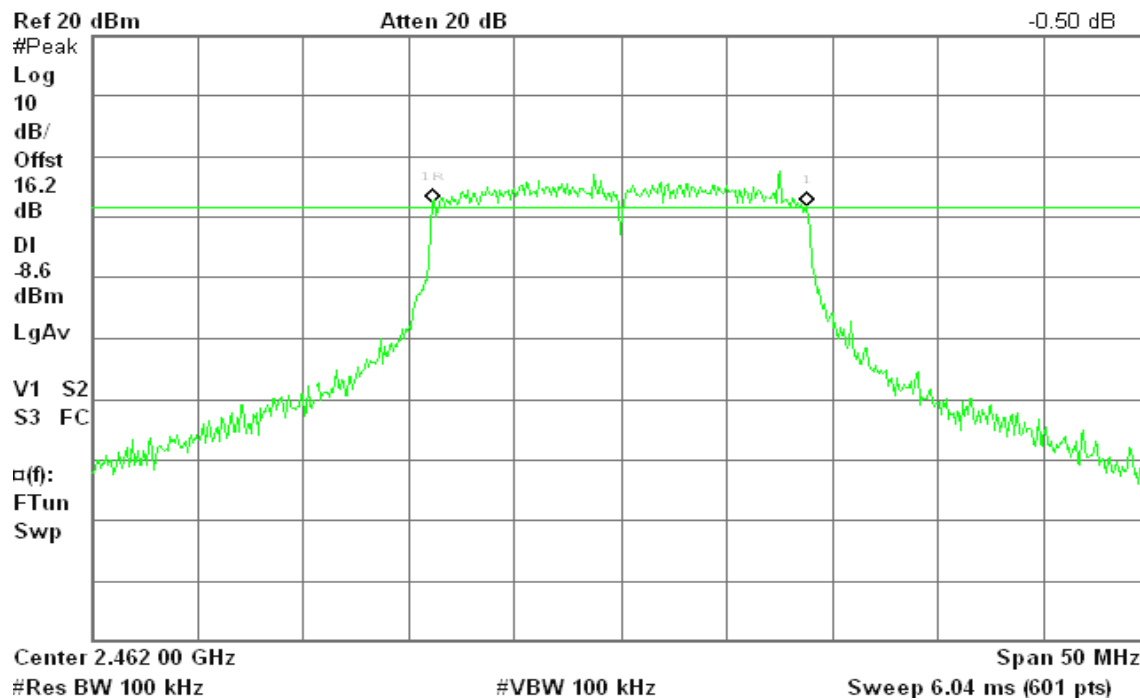

draft 802.11n Wide-40 MHz Channel mode


6dB Bandwidth (CH Low)

* Agilent 07:24:51 Oct 7, 2010

R T

 Δ Mkr1 35.08 MHz


-0.70 dB

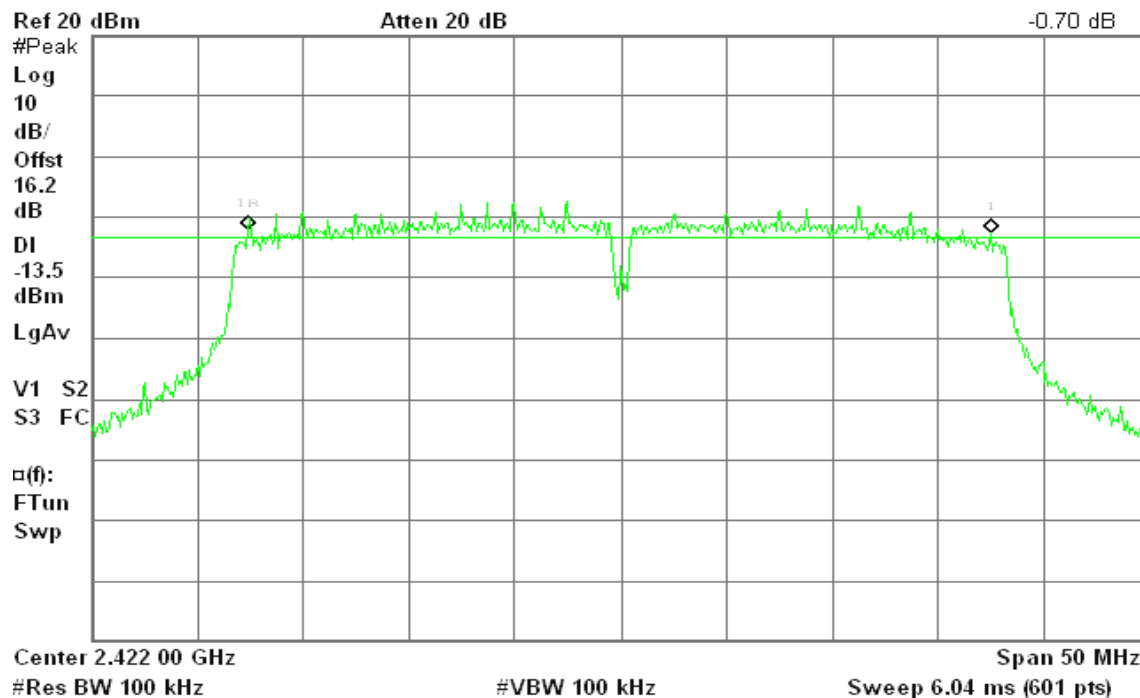

**6dB Bandwidth (CH Mid)**


* Agilent 07:29:47 Oct 7, 2010

R T

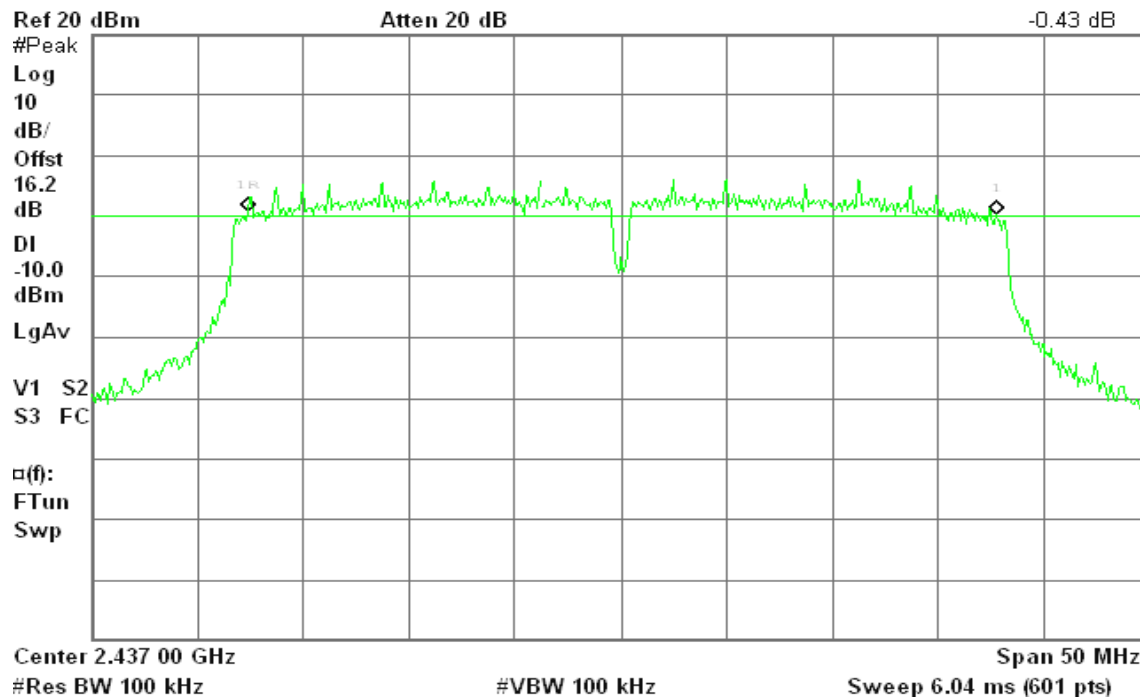 Δ Mkr1 35.33 MHz
-0.43 dB**6dB Bandwidth (CH High)**

* Agilent 07:39:17 Oct 7, 2010

R T

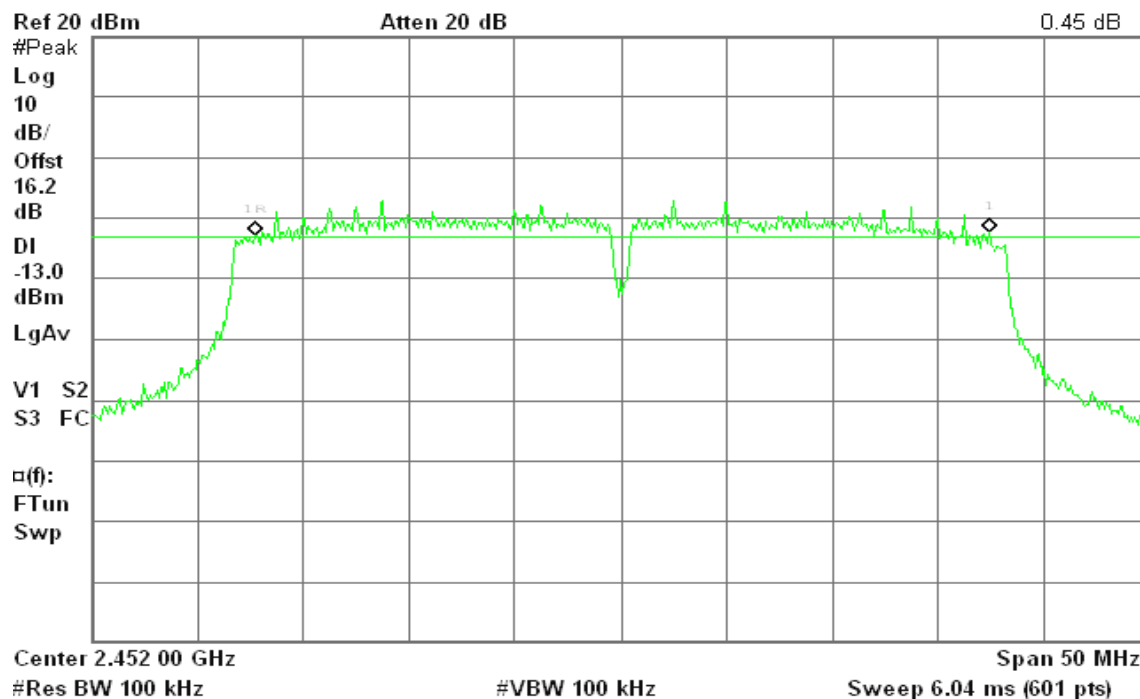 Δ Mkr1 34.67 MHz
0.45 dB




8.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3) & RSS-210 §A8.4(4), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

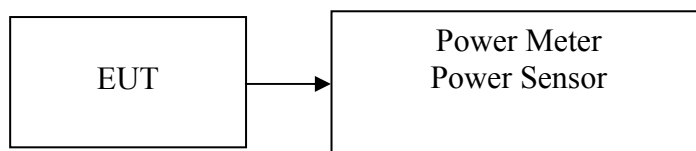

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.46	0.0443	1.00	PASS
Mid	2437	19.36	0.0863		PASS
High	2462	16.39	0.0436		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	19.79	0.0953	1.00	PASS
Mid	2437	25.12	0.3251		PASS
High	2462	20.19	0.1045		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.41	0.0693	1.00	PASS
Mid	2437	25.09	0.3228		PASS
High	2462	19.61	0.0914		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	17.48	0.0560	1.00	PASS
Mid	2437	21.16	0.1306		PASS
High	2452	17.89	0.0615		PASS




8.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d) & RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

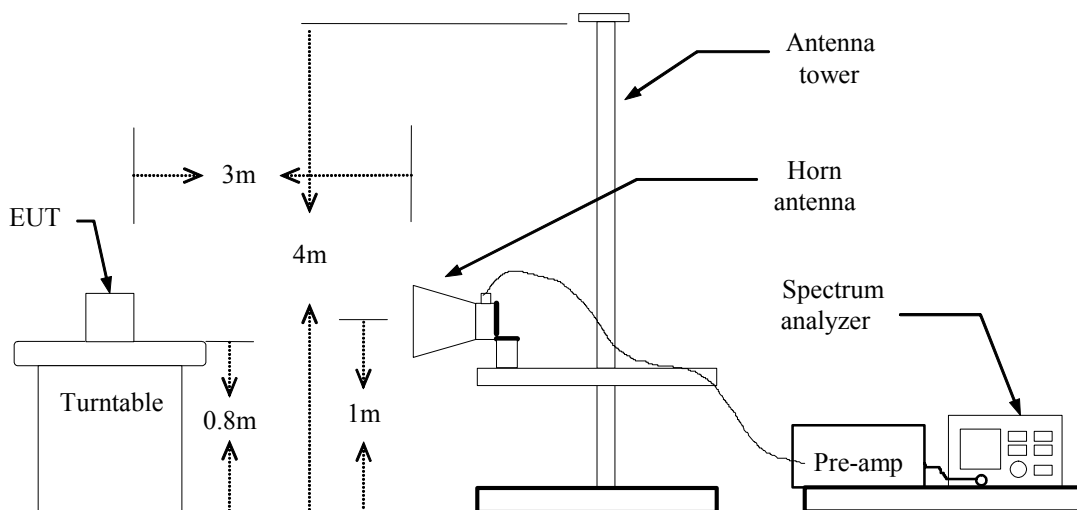

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


TEST RESULTS

Refer to attach spectrum analyzer data chart.

**For Monopole Antenna****Band Edges (IEEE 802.11b mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 15:55:33 Oct 5, 2010

R T

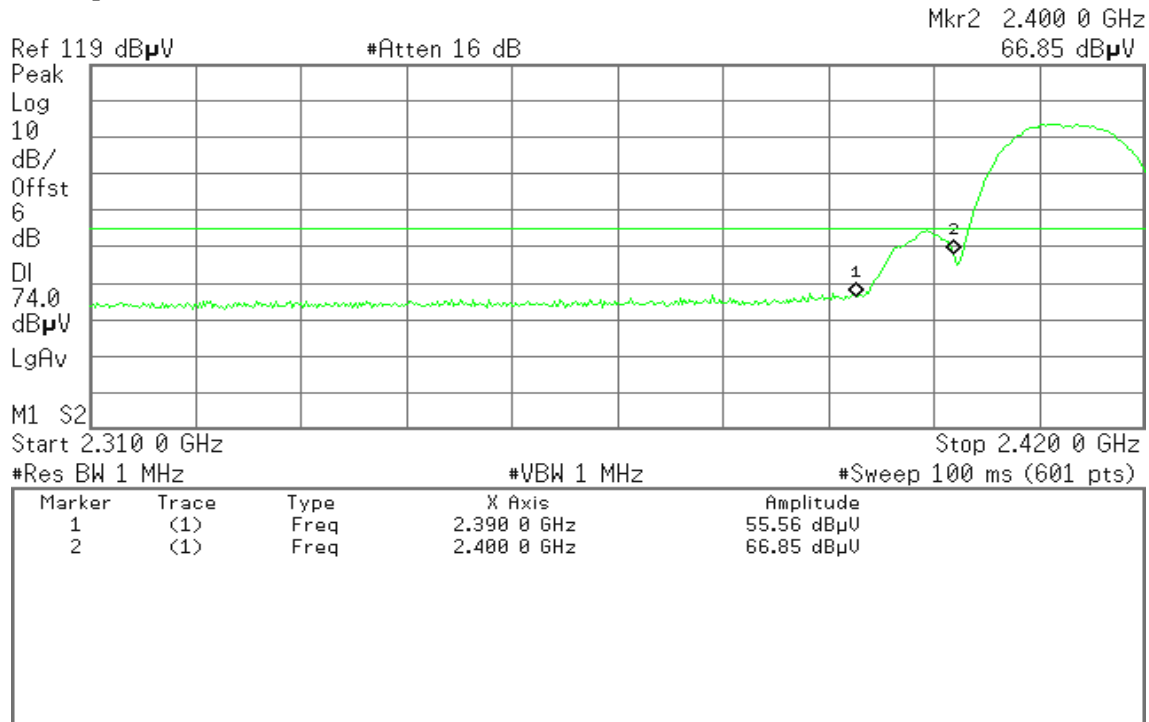**Detector mode: Average****Polarity: Vertical**

* Agilent 15:54:58 Oct 5, 2010

R T

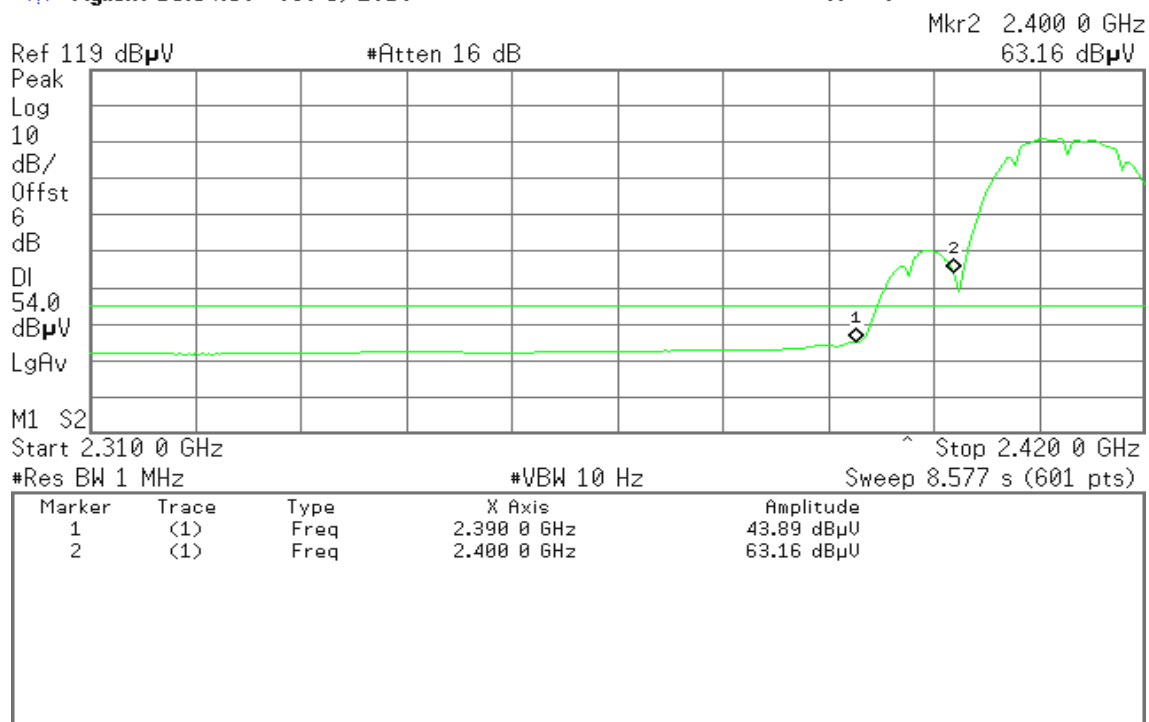



Detector mode: Peak


Polarity: Horizontal

* Agilent 15:49:41 Oct 5, 2010

R T

Mkr1 2.390 0 GHz
58.41 dB μ VRef 119 dB μ V

#Atten 16 dB

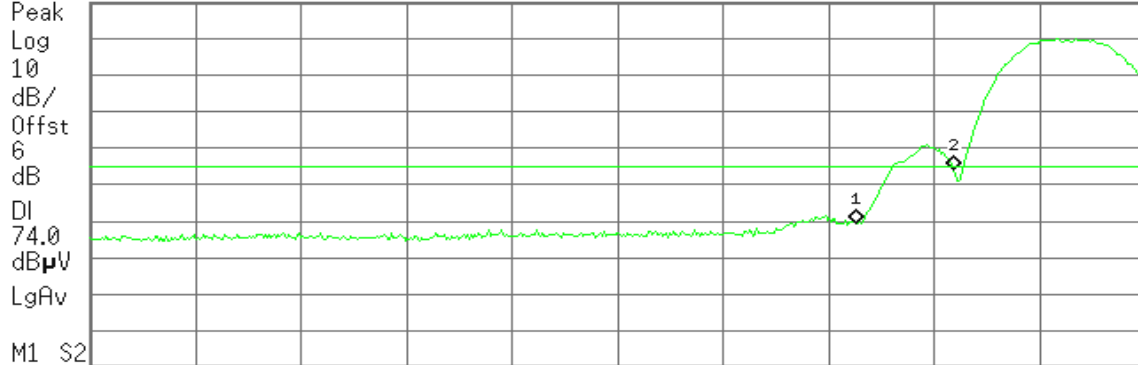M1 S2
Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	58.41 dB μ V
2	(1)	Freq	2.400 0 GHz	73.14 dB μ V

Detector mode: Average


Polarity: Horizontal

* Agilent 15:48:24 Oct 5, 2010

R T

Mkr1 2.386 3 GHz
50.96 dB μ VRef 119 dB μ V

#Atten 16 dB

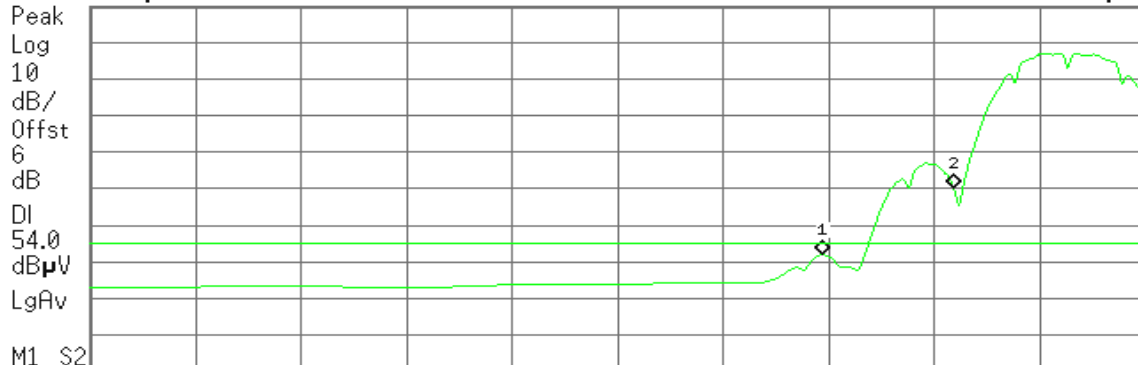M1 S2
Start 2.310 0 GHz

^ Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.386 3 GHz	50.96 dB μ V
2	(1)	Freq	2.400 0 GHz	69.33 dB μ V

**Band Edges (IEEE 802.11b mode / CH High)****Detector mode: Peak****Polarity: Vertical**

* Agilent 16:08:15 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
53.79 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

* Agilent 16:07:49 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
41.58 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

^ Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal

* Agilent 17:21:17 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
58.10 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

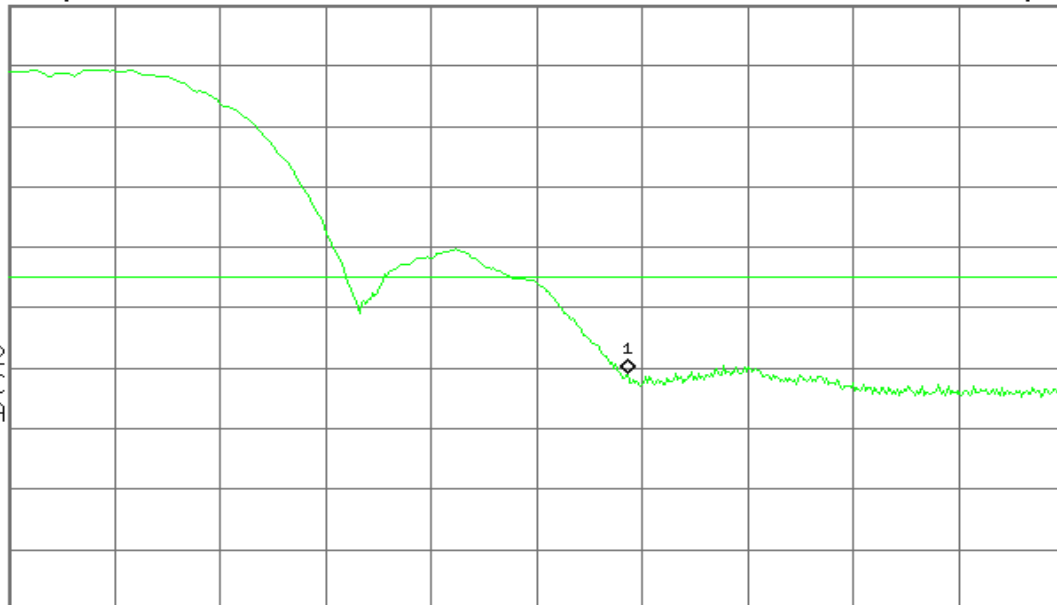

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

* Agilent 17:20:46 Oct 5, 2010

R T

Mkr1 2.487 60 GHz
49.66 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

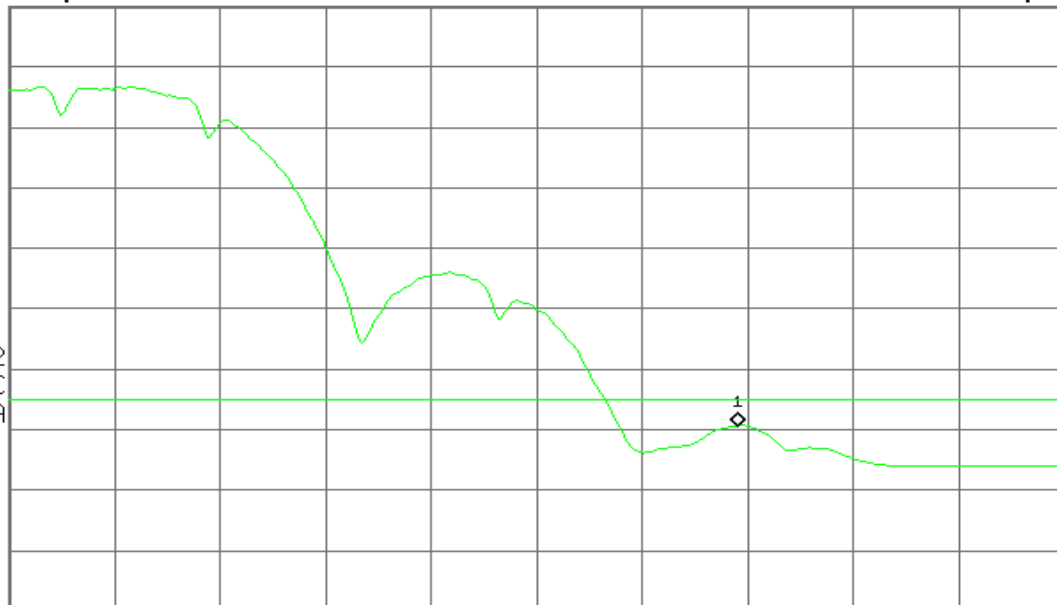

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz


#VBW 10 Hz

Sweep 3.119 s (601 pts)

**Band Edges (IEEE 802.11g mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


Agilent 15:12:16 Oct 5, 2010

R T

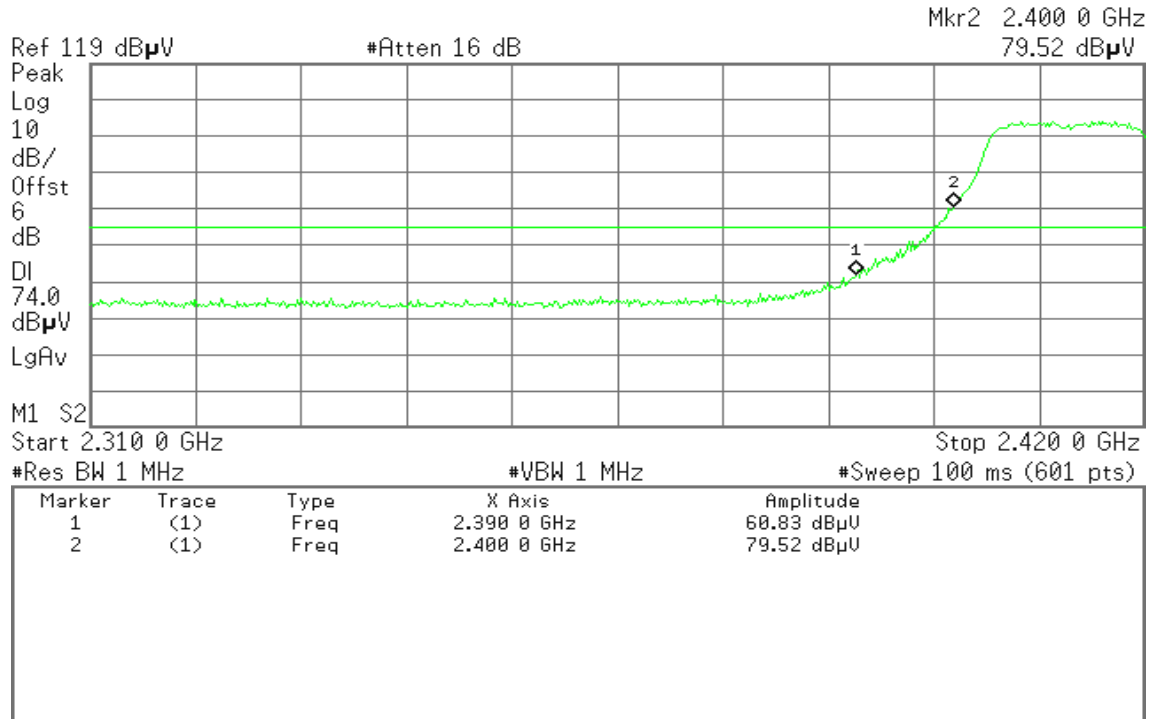**Detector mode: Average****Polarity: Vertical**

Agilent 15:12:45 Oct 5, 2010

R T

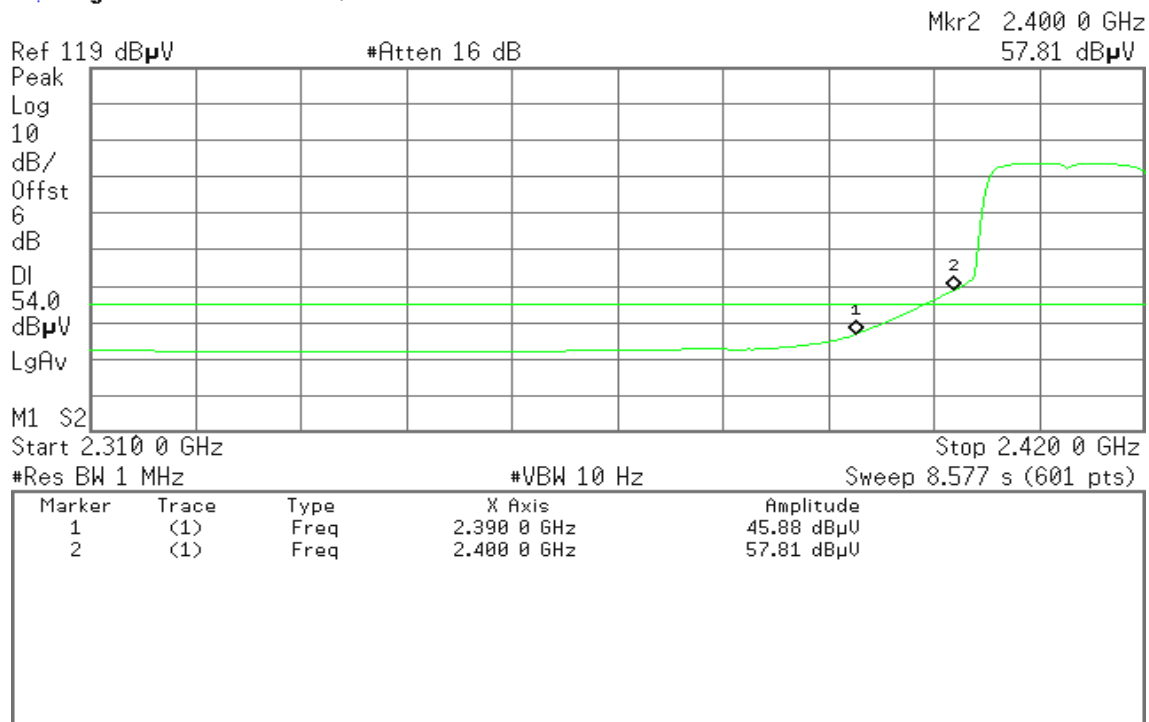




Detector mode: Peak

Polarity: Horizontal

* Agilent 14:59:32 Oct 5, 2010

R T

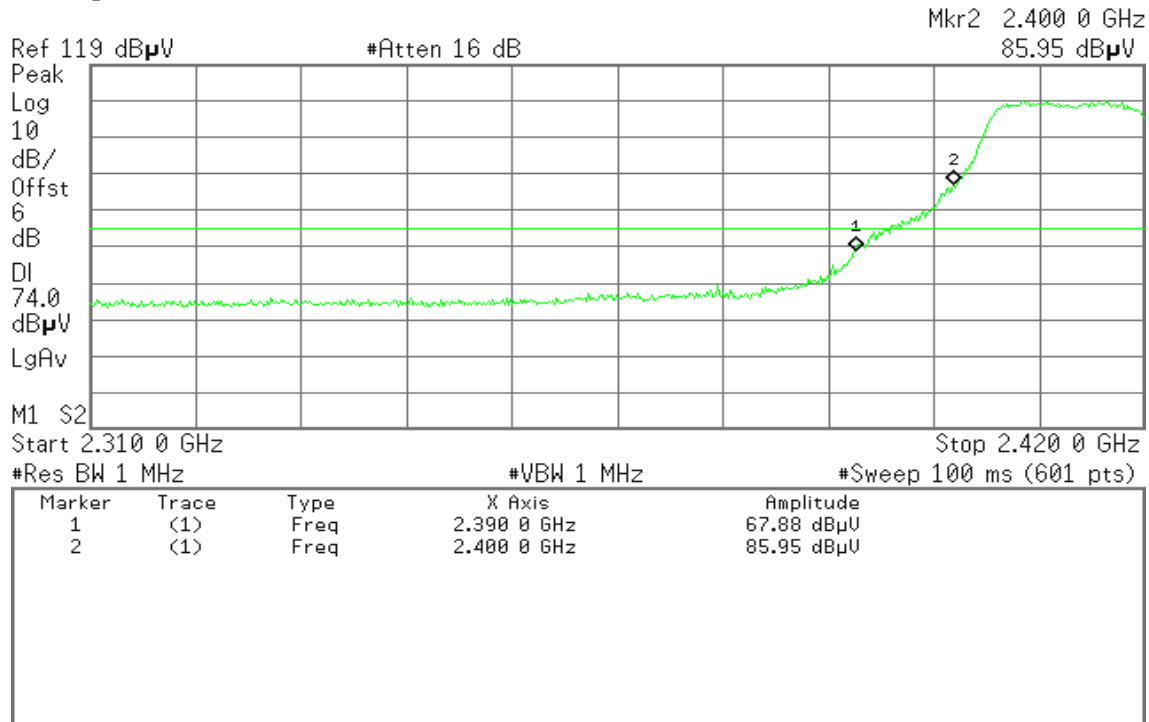


Detector mode: Average

Polarity: Horizontal

* Agilent 15:00:04 Oct 5, 2010

R T

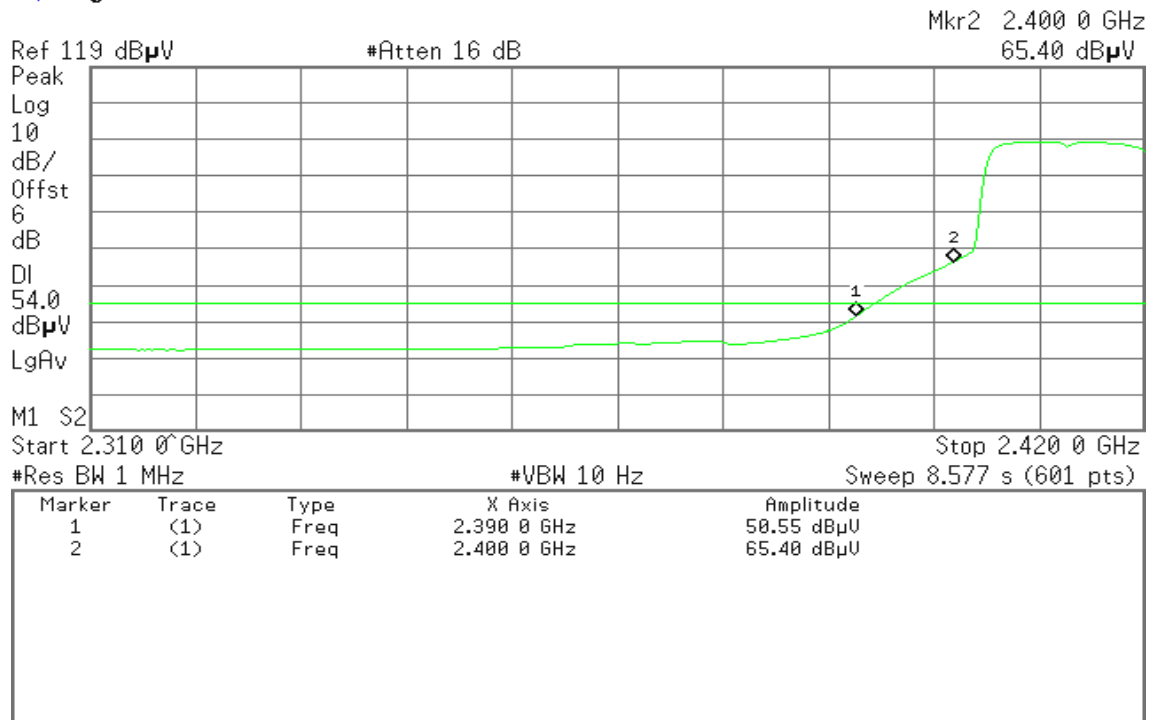

**Band Edges (IEEE 802.11g mode / CH High)****Detector mode: Peak****Polarity: Vertical**

* Agilent 14:16:17 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
57.37 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

* Agilent 14:15:43 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
43.17 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal

* Agilent 14:13:30 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
69.82 dB μ VRef 119 dB μ V

#Atten 18 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

* Agilent 14:12:57 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
50.10 dB μ VRef 119 dB μ V

#Atten 18 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 15:09:51 Oct 5, 2010

R T

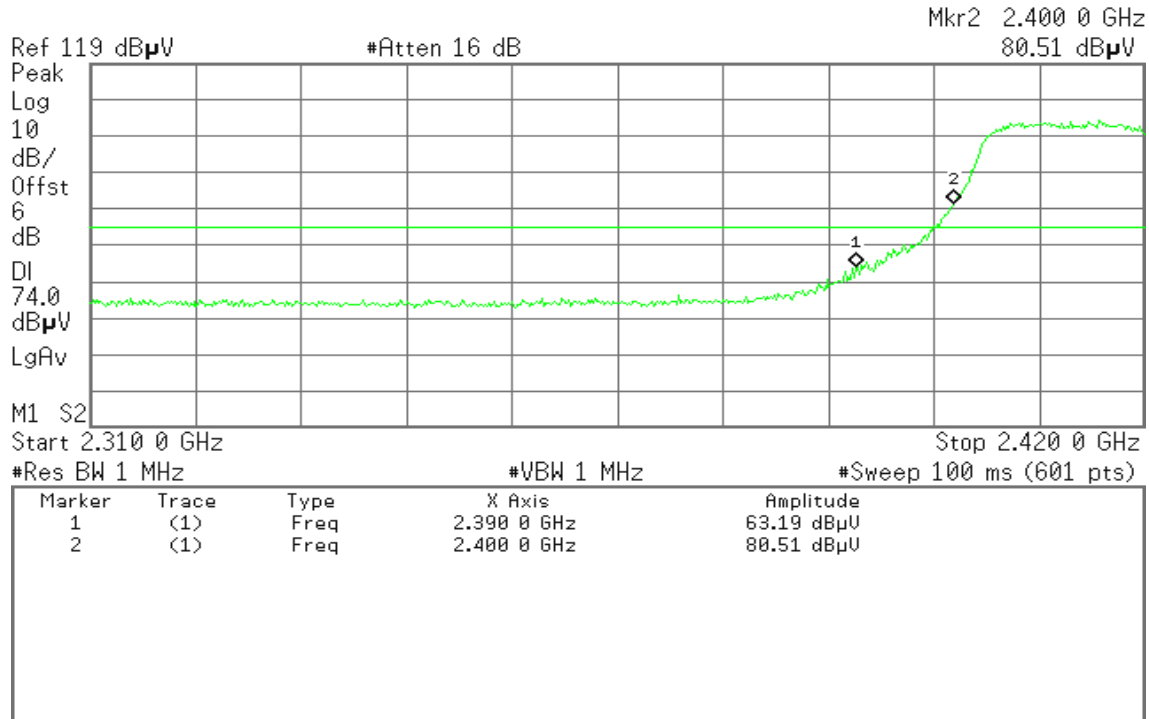**Detector mode: Average****Polarity: Vertical**

* Agilent 15:09:29 Oct 5, 2010

R T

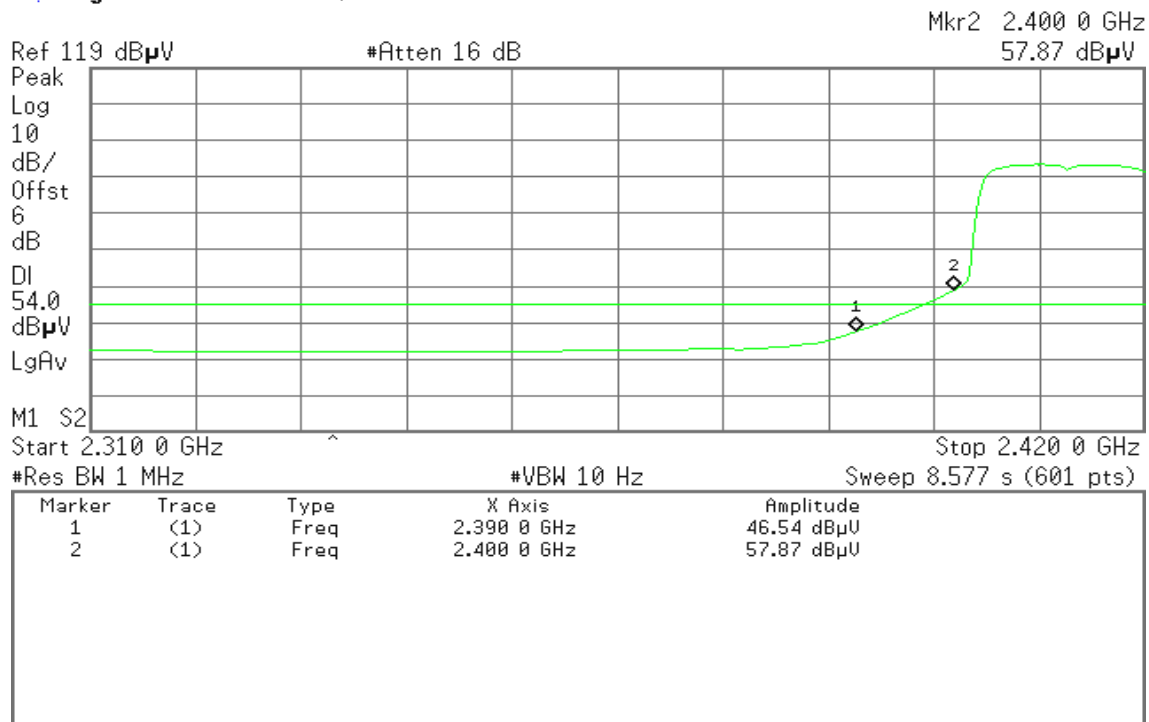




Detector mode: Peak

Polarity: Horizontal

* Agilent 14:55:43 Oct 5, 2010

R T

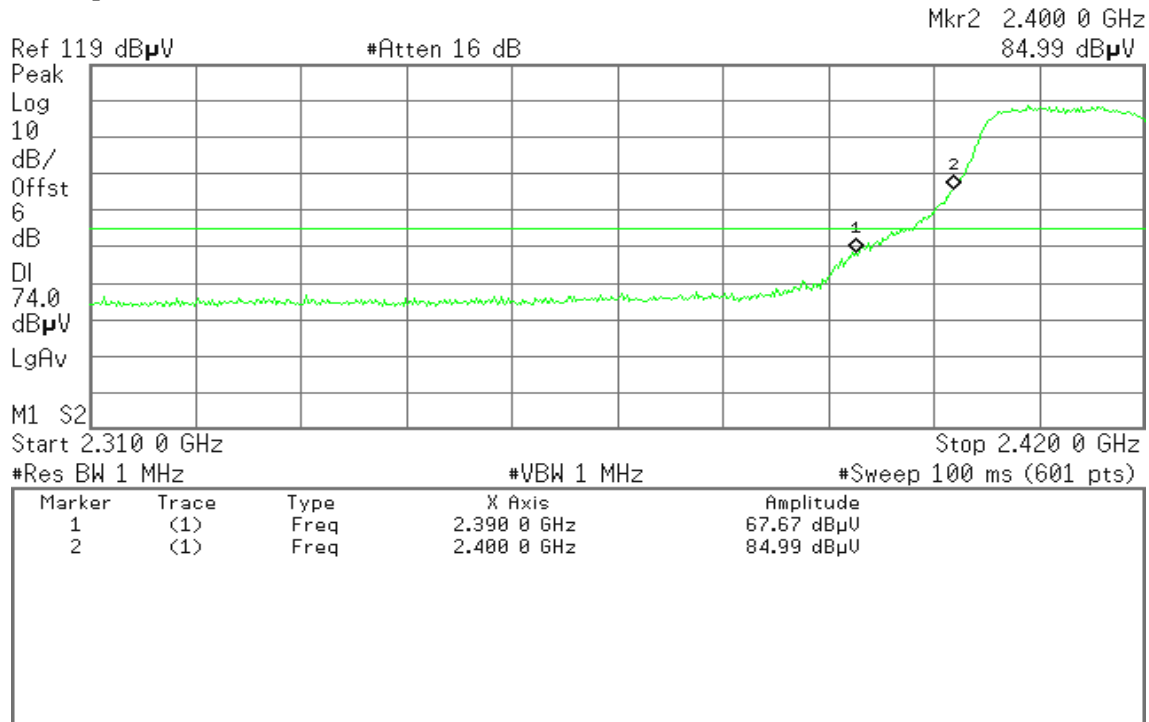


Detector mode: Average

Polarity: Horizontal

* Agilent 14:55:05 Oct 5, 2010

R T

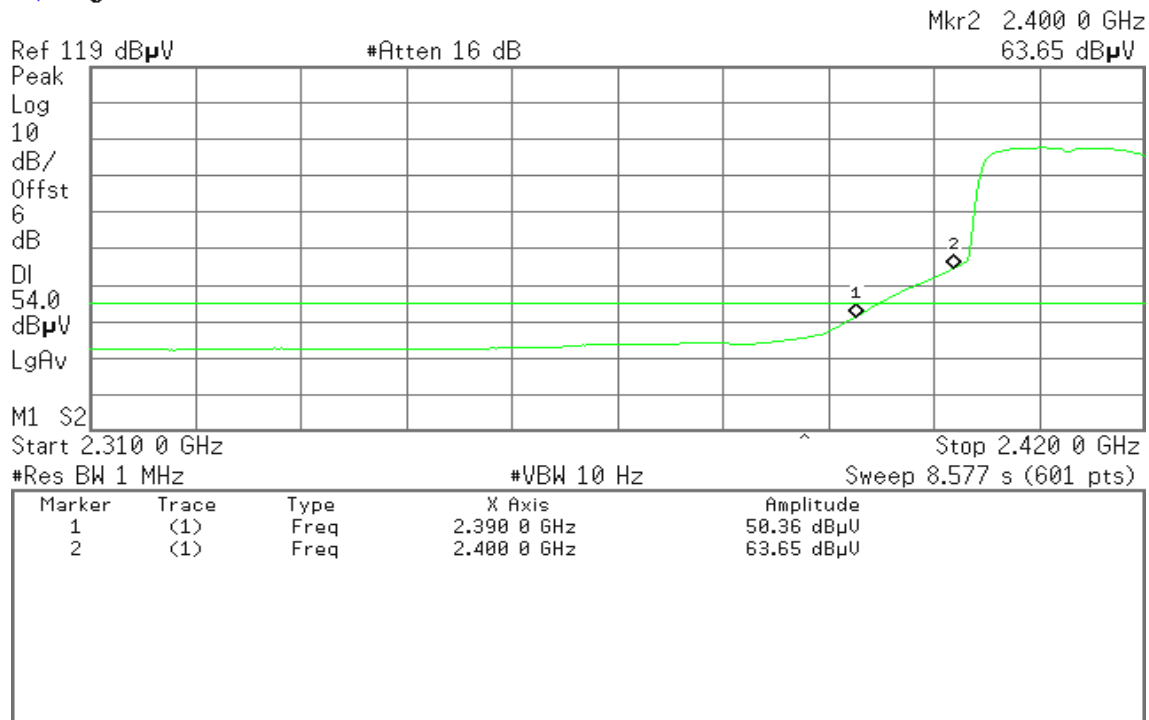

**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**

* Agilent 14:27:18 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
56.25 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

* Agilent 14:28:05 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
43.23 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal

* Agilent 11:50:20 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
64.43 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

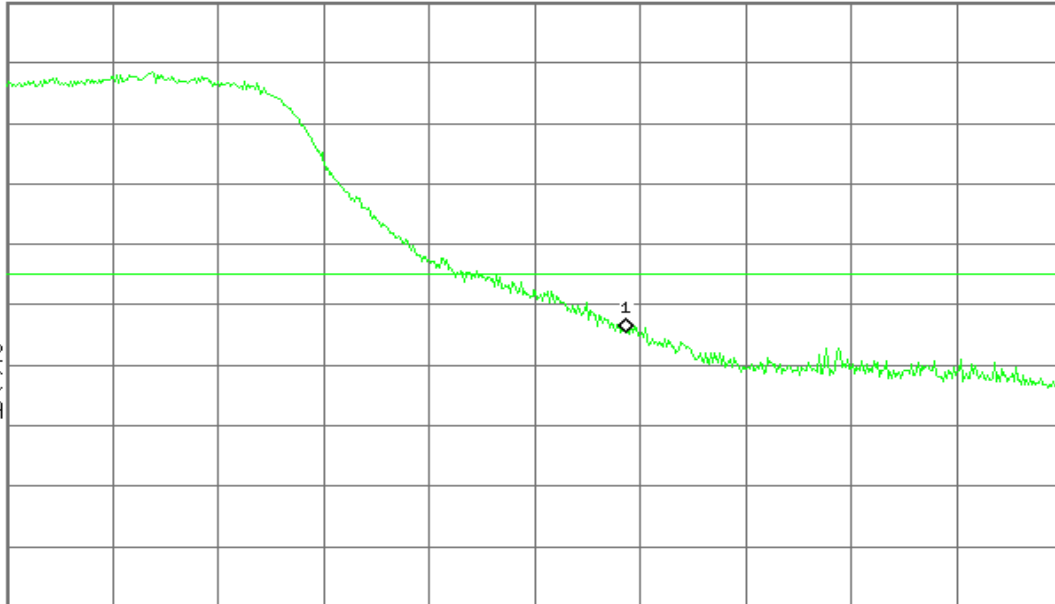

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

* Agilent 14:25:05 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
50.63 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

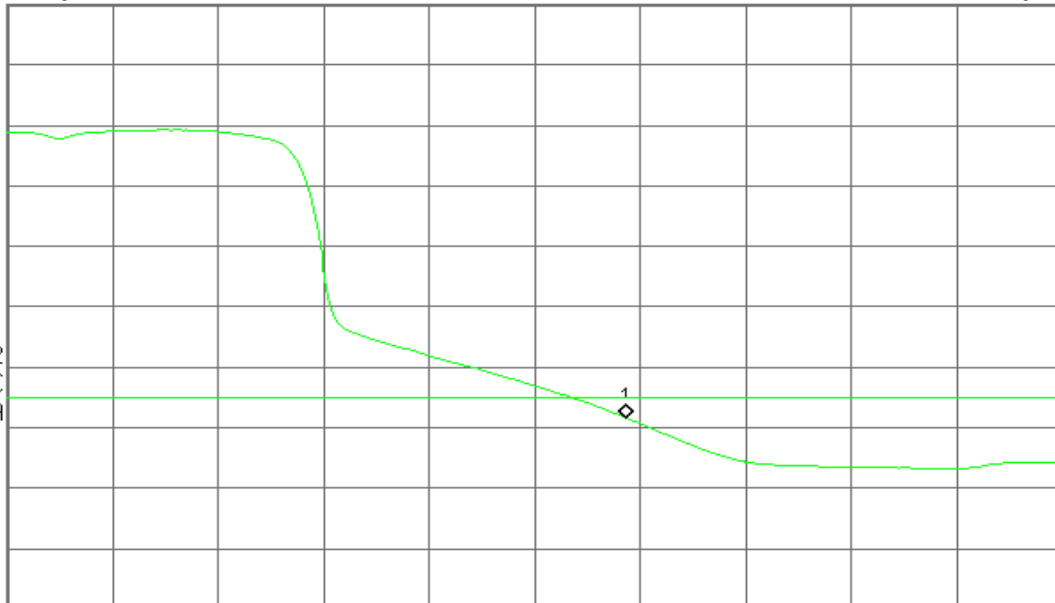

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz


#VBW 10 Hz

Sweep 3.119 s (601 pts)

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 15:20:26 Oct 5, 2010

R T

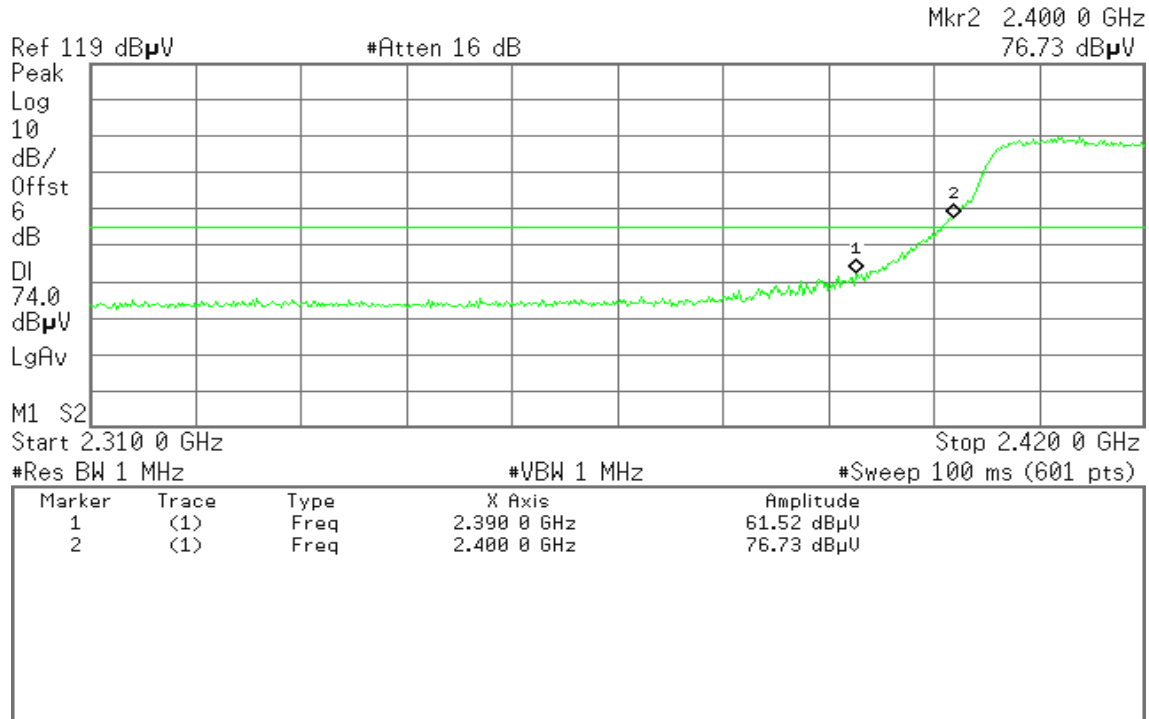**Detector mode: Average****Polarity: Vertical**

* Agilent 15:20:00 Oct 5, 2010

R T

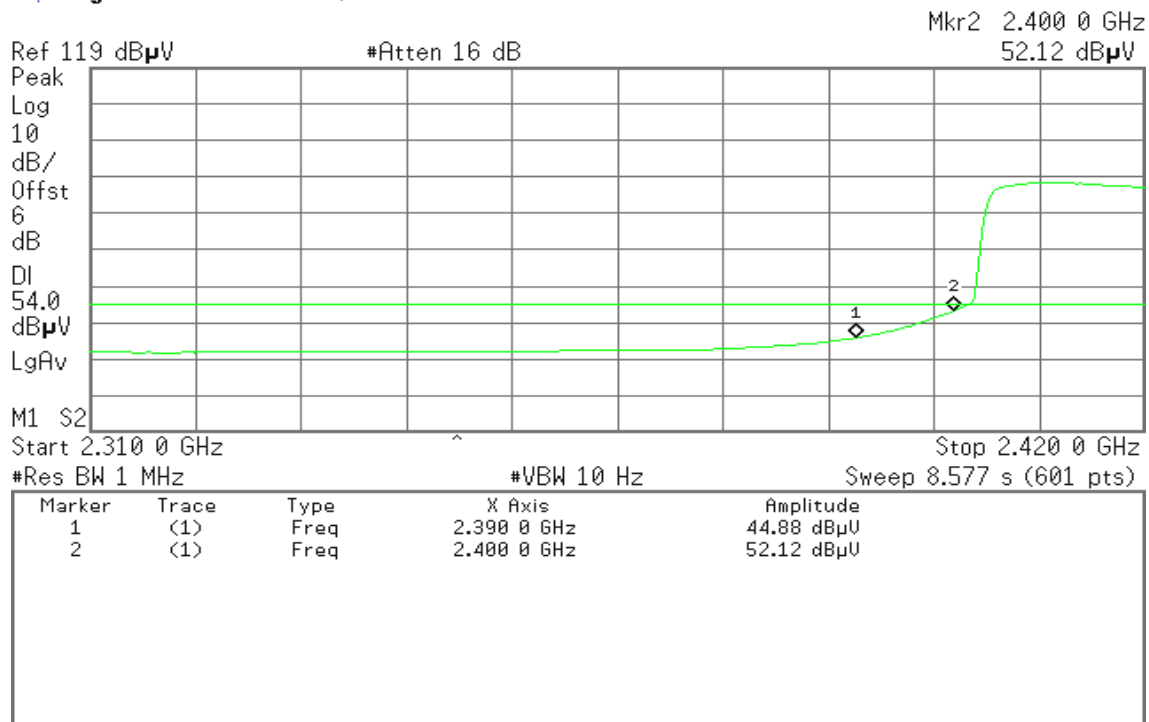




Detector mode: Peak

Polarity: Horizontal

* Agilent 15:25:34 Oct 5, 2010

R T

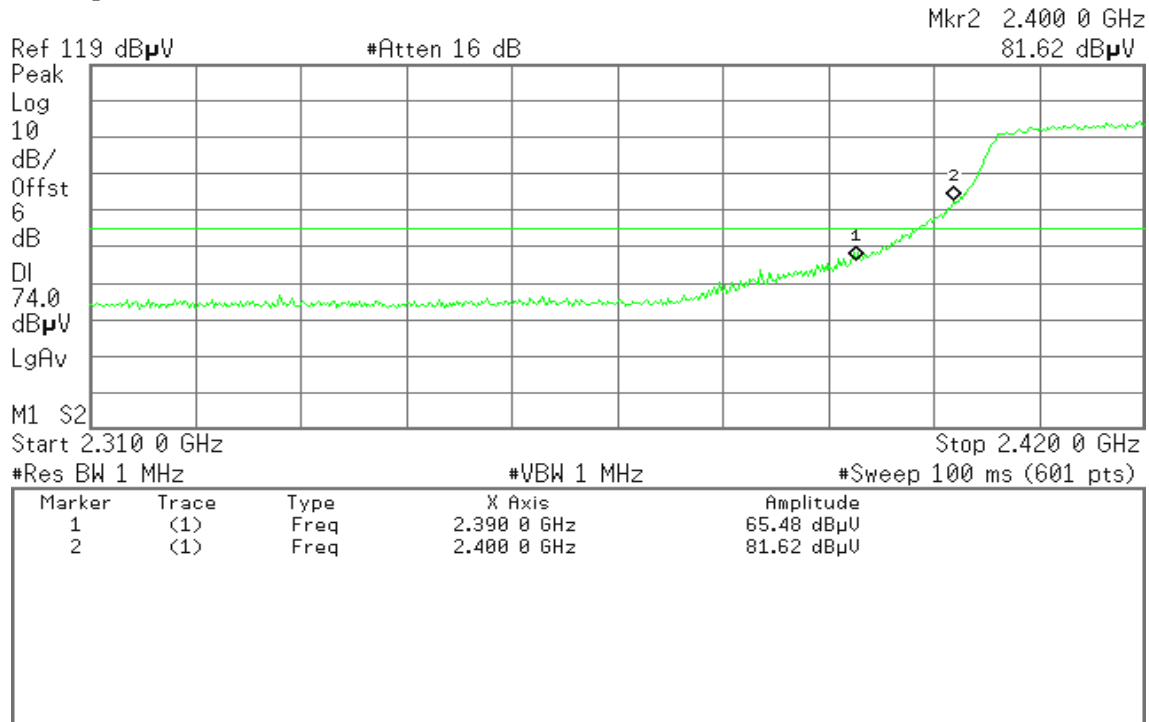


Detector mode: Average

Polarity: Horizontal

* Agilent 15:25:10 Oct 5, 2010

R T

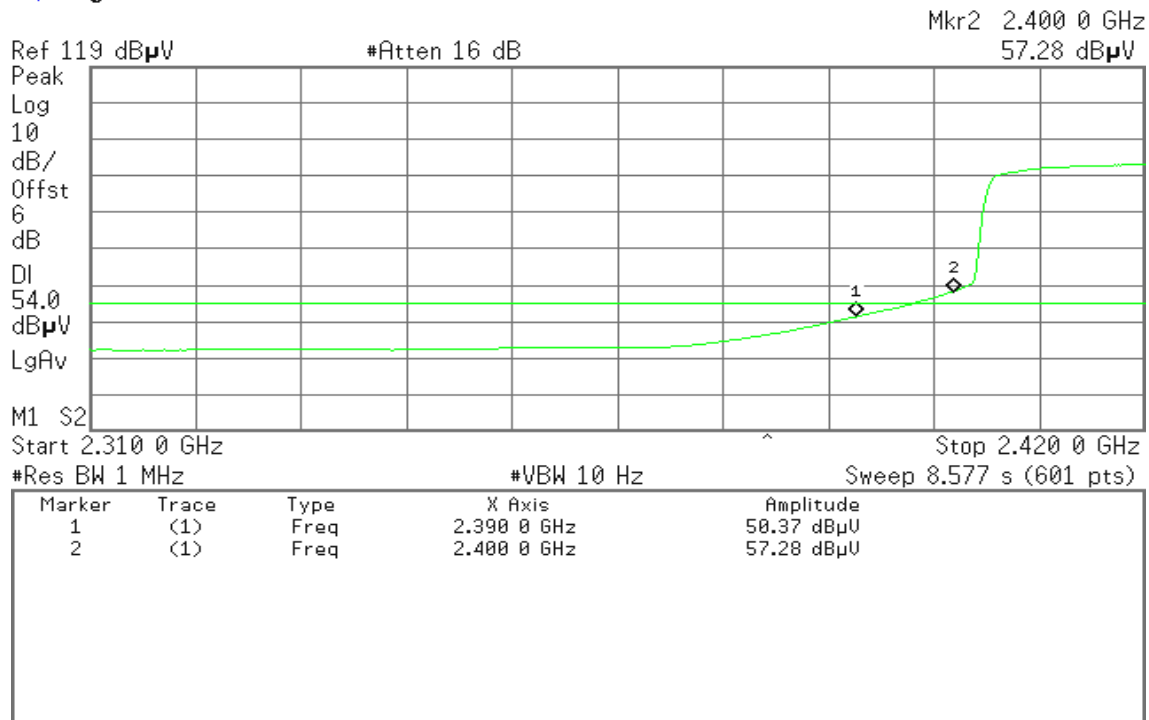

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**

* Agilent 15:38:29 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
58.33 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

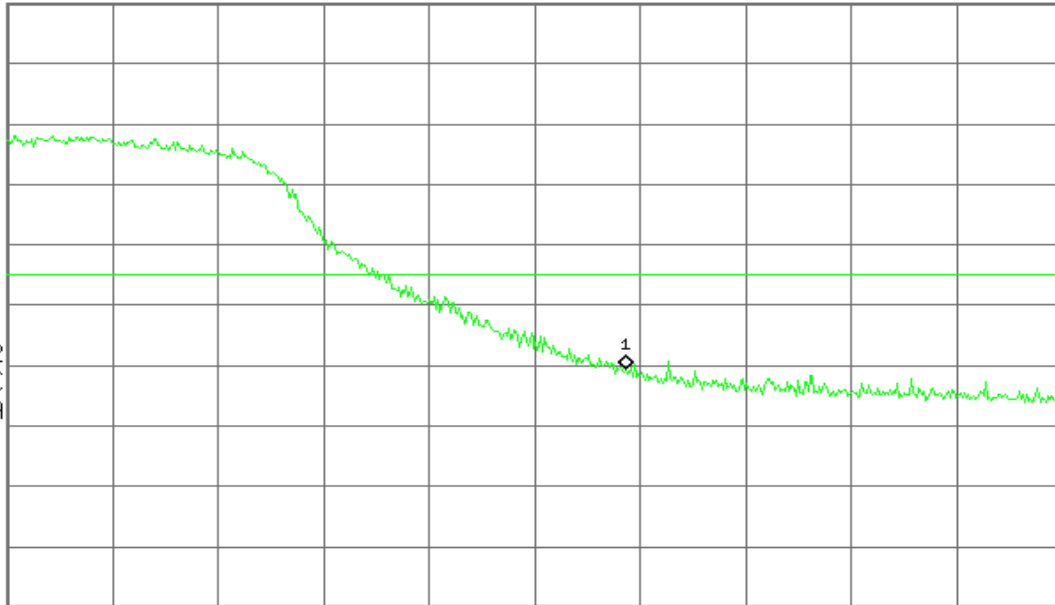

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Stop 2.500 00 GHz

Detector mode: Average**Polarity: Vertical**

* Agilent 15:38:04 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
43.73 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

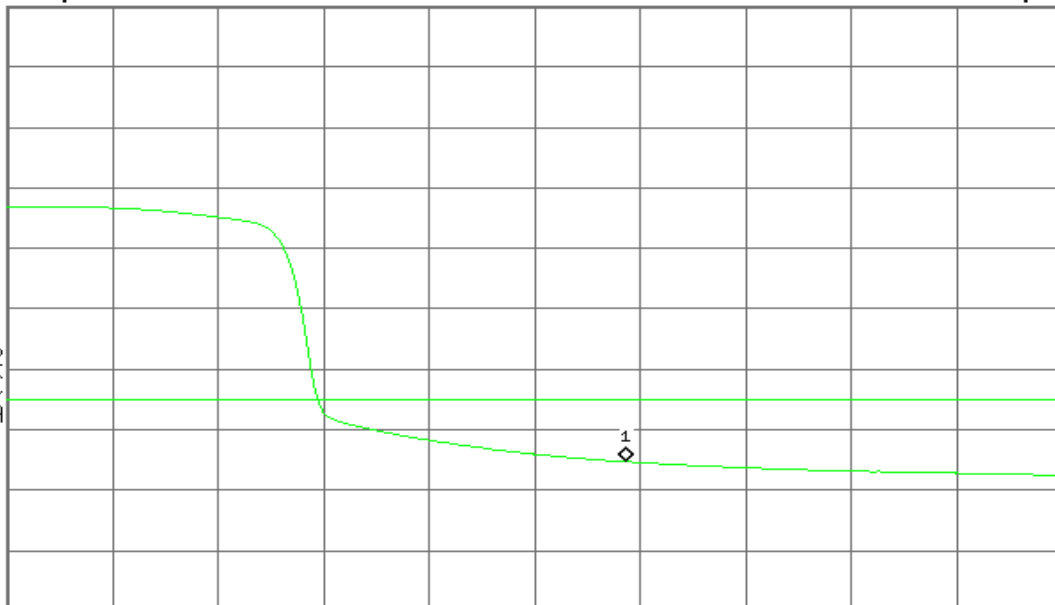

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)

Stop 2.500 00 GHz



Detector mode: Peak

Polarity: Horizontal

* Agilent 15:32:36 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
65.90 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

* Agilent 15:32:16 Oct 5, 2010

R T

Mkr1 2.483 50 GHz
50.92 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

E(f):

FTun

Swp

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz


#VBW 10 Hz

Sweep 3.119 s (601 pts)

**For PIFA Antenna****IEEE 802.11b Mode / CH Low****Detector mode: Peak****Polarity: Vertical**


* Agilent 17:08:04 Oct 4, 2010

R T

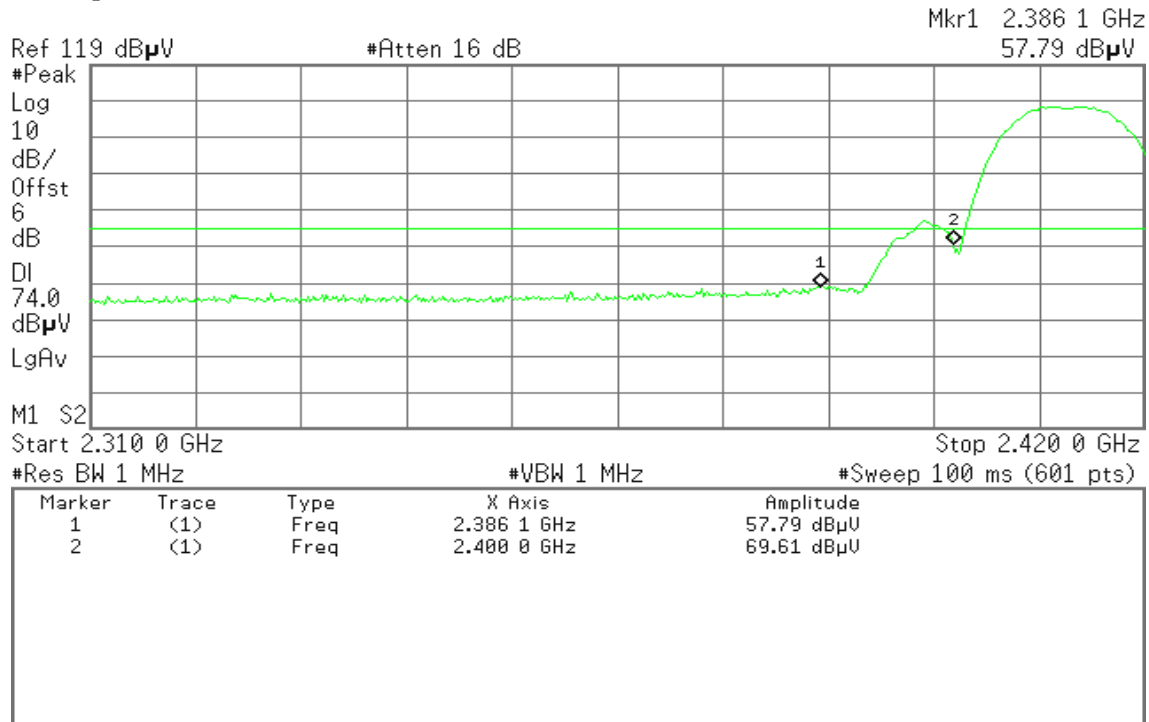**Detector mode: Average****Polarity: Vertical**

* Agilent 17:07:40 Oct 4, 2010

R T

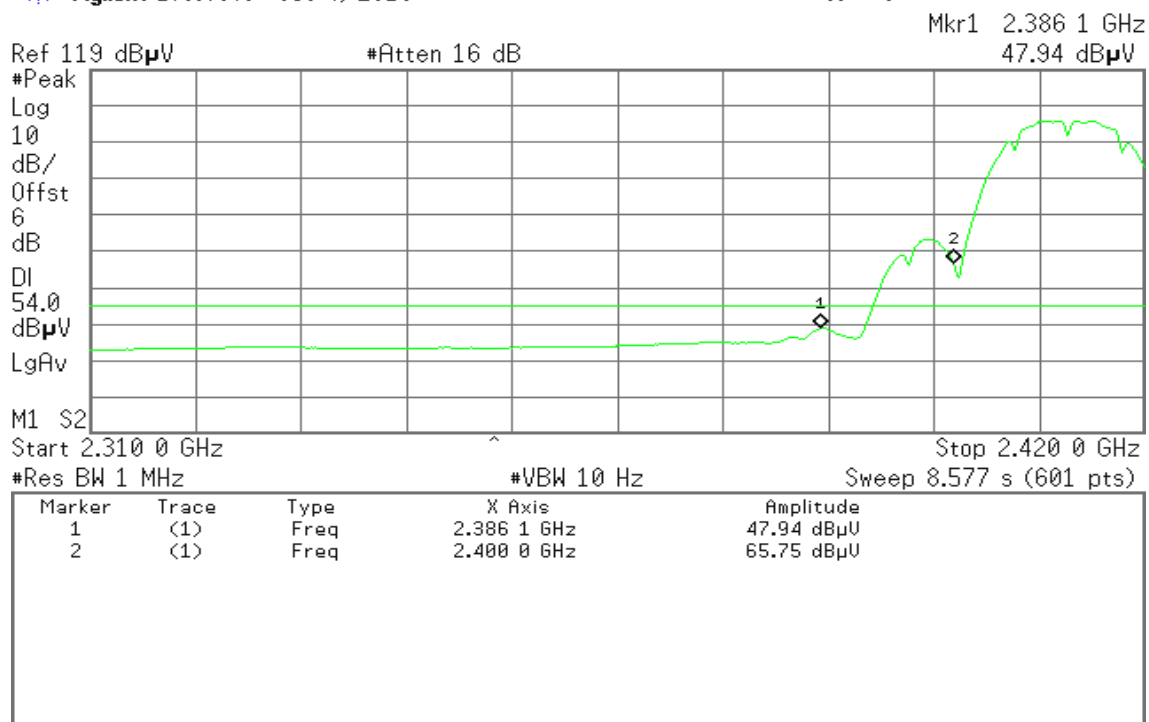



Detector mode: Peak

Polarity: Horizontal

* Agilent 17:19:25 Oct 4, 2010

R T

Mkr1 2.390 0 GHz
55.42 dB μ VRef 119 dB μ V

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	55.42 dB μ U
2	(1)	Freq	2.400 0 GHz	65.17 dB μ U

Detector mode: Average

Polarity: Horizontal

* Agilent 17:20:40 Oct 4, 2010

R T

Mkr1 2.390 0 GHz
43.62 dB μ VRef 119 dB μ V

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	43.62 dB μ U
2	(1)	Freq	2.400 0 GHz	60.49 dB μ U

**Band Edges (IEEE 802.11b mode / CH High)****Detector mode: Peak****Polarity: Vertical**


* Agilent 17:26:17 Oct 4, 2010

R T

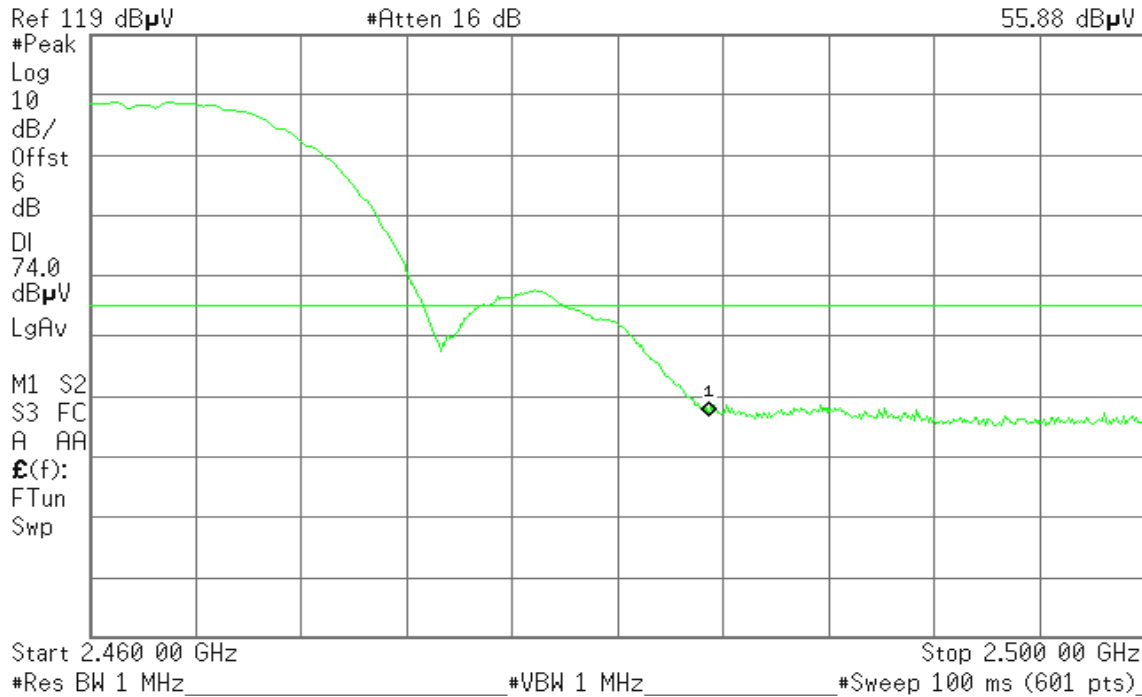Mkr1 2.483 50 GHz
55.88 dB μ V**Detector mode: Average****Polarity: Vertical**

* Agilent 17:26:45 Oct 4, 2010

R T

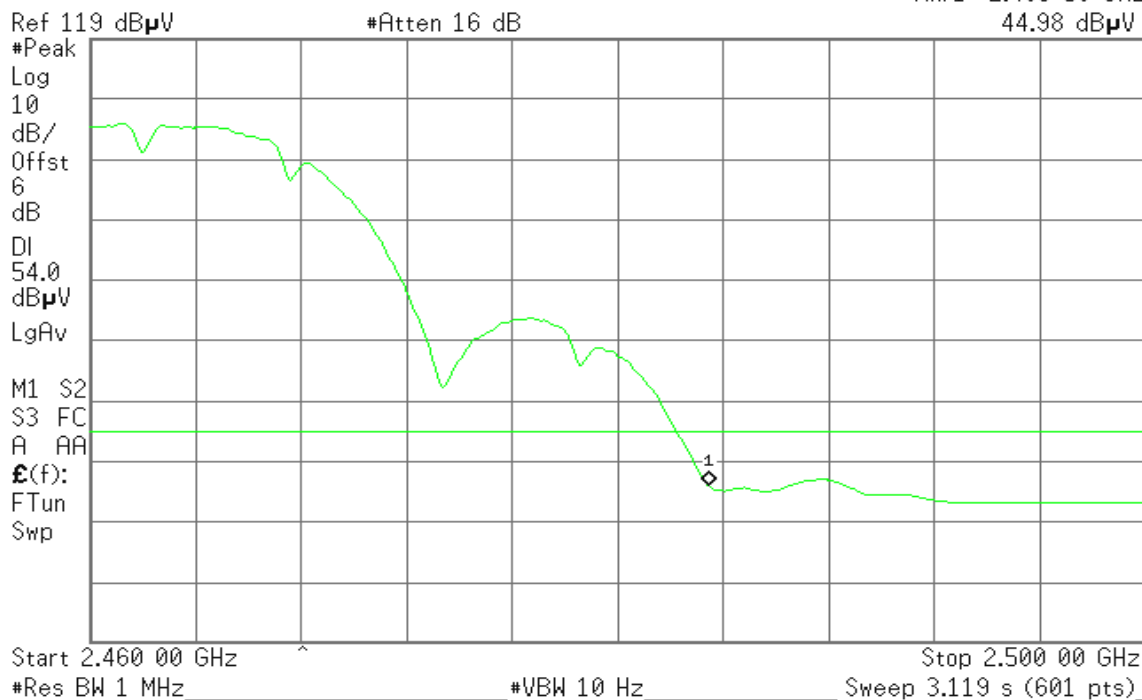Mkr1 2.483 50 GHz
44.98 dB μ V



Detector mode: Peak

Polarity: Horizontal

* Agilent 17:31:49 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
55.49 dB μ VRef 119 dB μ V

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

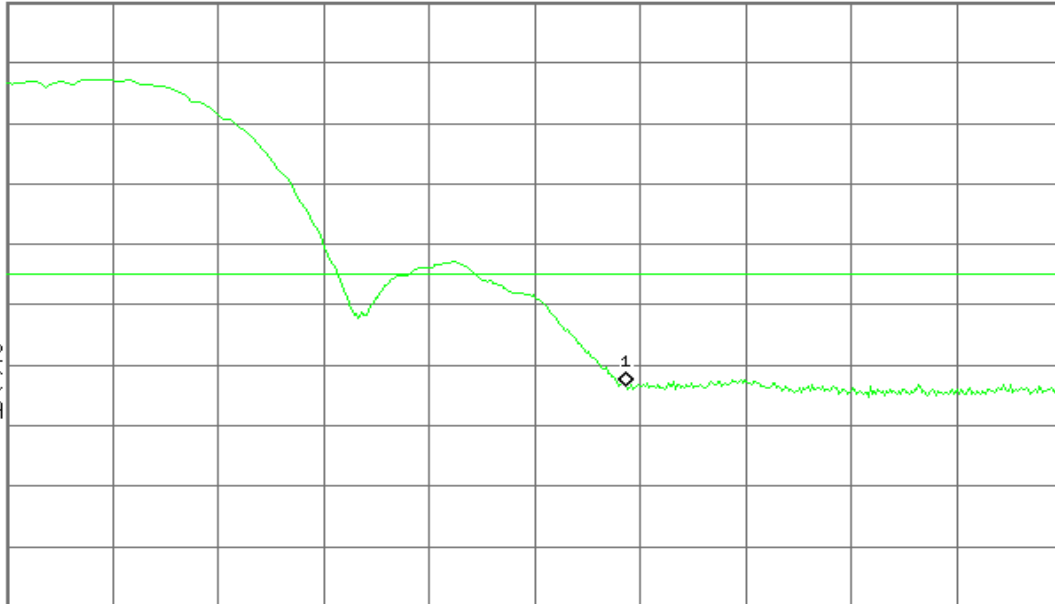

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Stop 2.500 00 GHz

Detector mode: Average

Polarity: Horizontal

* Agilent 17:32:25 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
43.42 dB μ VRef 119 dB μ V

#Atten 16 dB

#Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

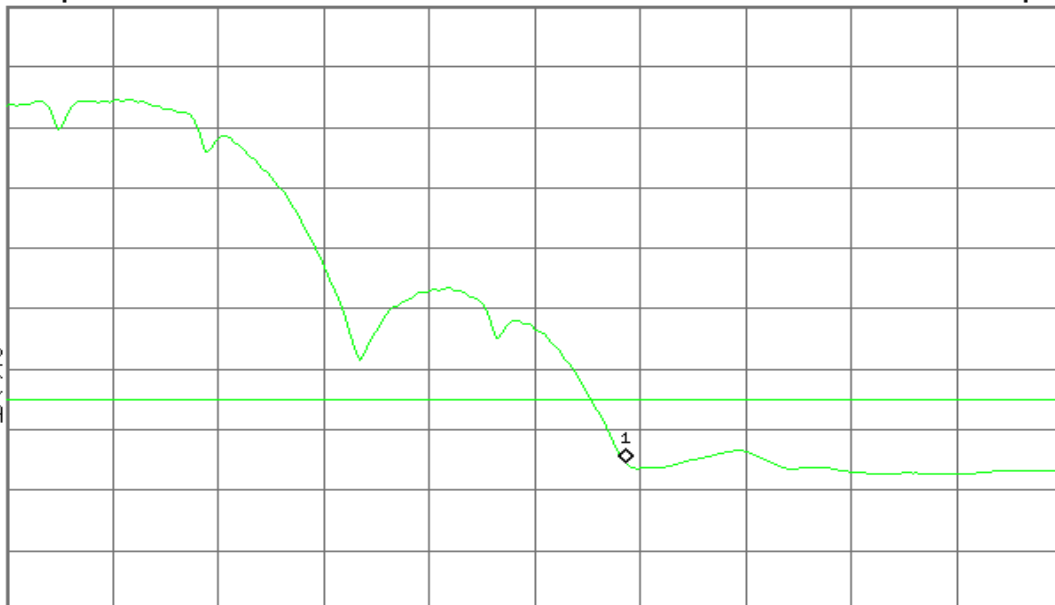

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 3.119 s (601 pts)

Stop 2.500 00 GHz

**Band Edges (IEEE 802.11g mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 10:29:20 Oct 4, 2010

R T

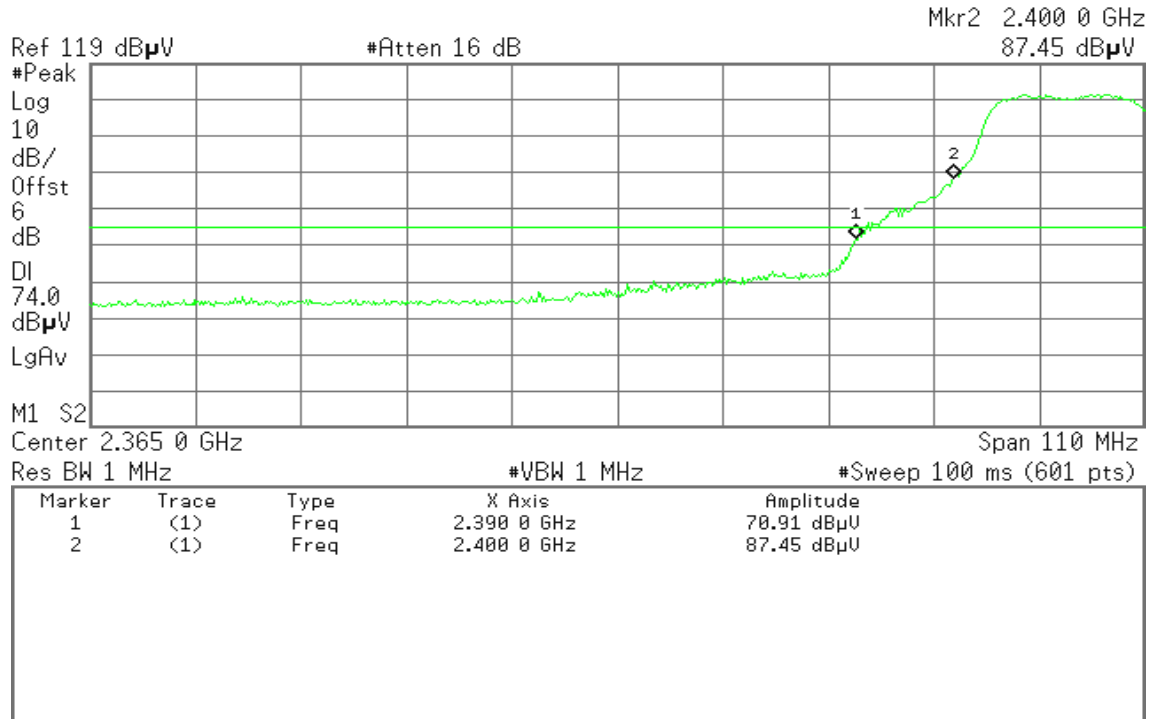**Detector mode: Average****Polarity: Vertical**

* Agilent 10:34:20 Oct 4, 2010

R T

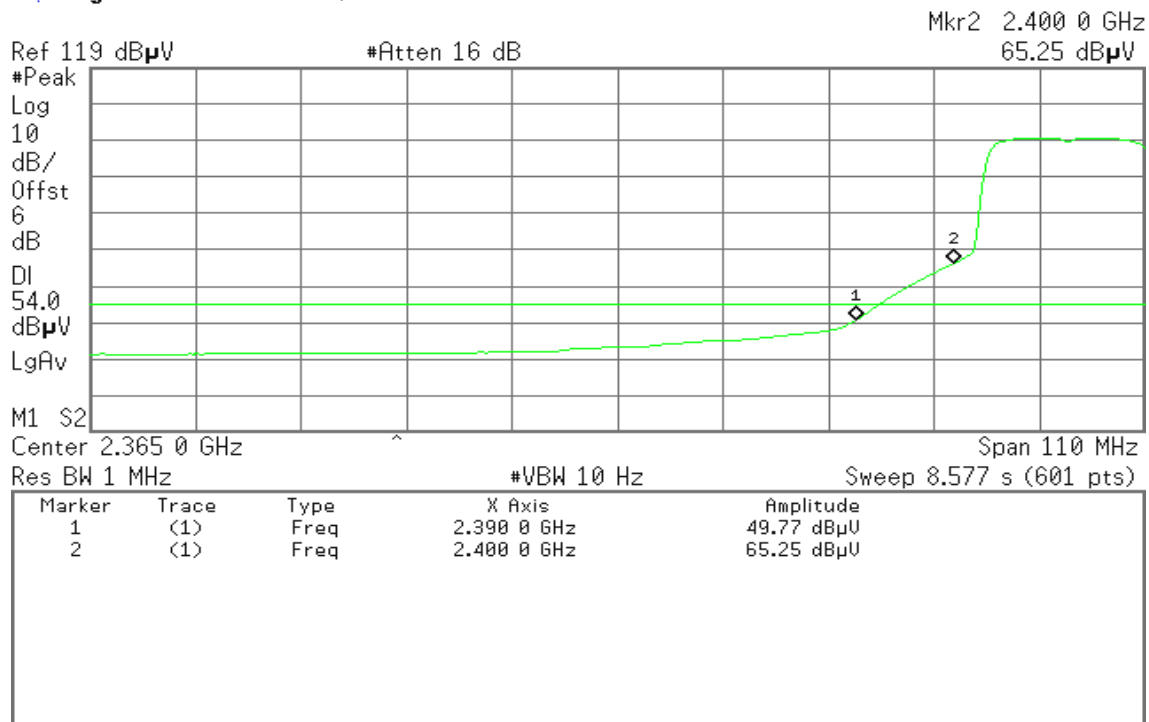




Detector mode: Peak

Polarity: Horizontal

* Agilent 10:46:05 Oct 4, 2010

R T

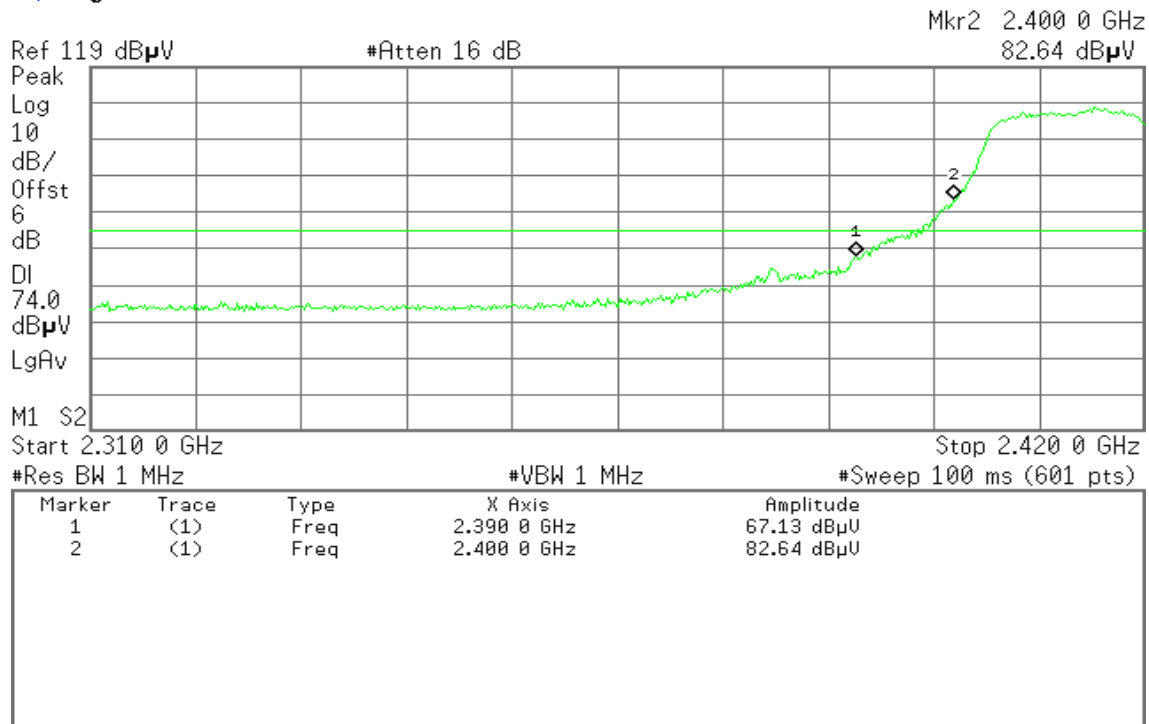


Detector mode: Average

Polarity: Horizontal

* Agilent 10:45:15 Oct 4, 2010

R T

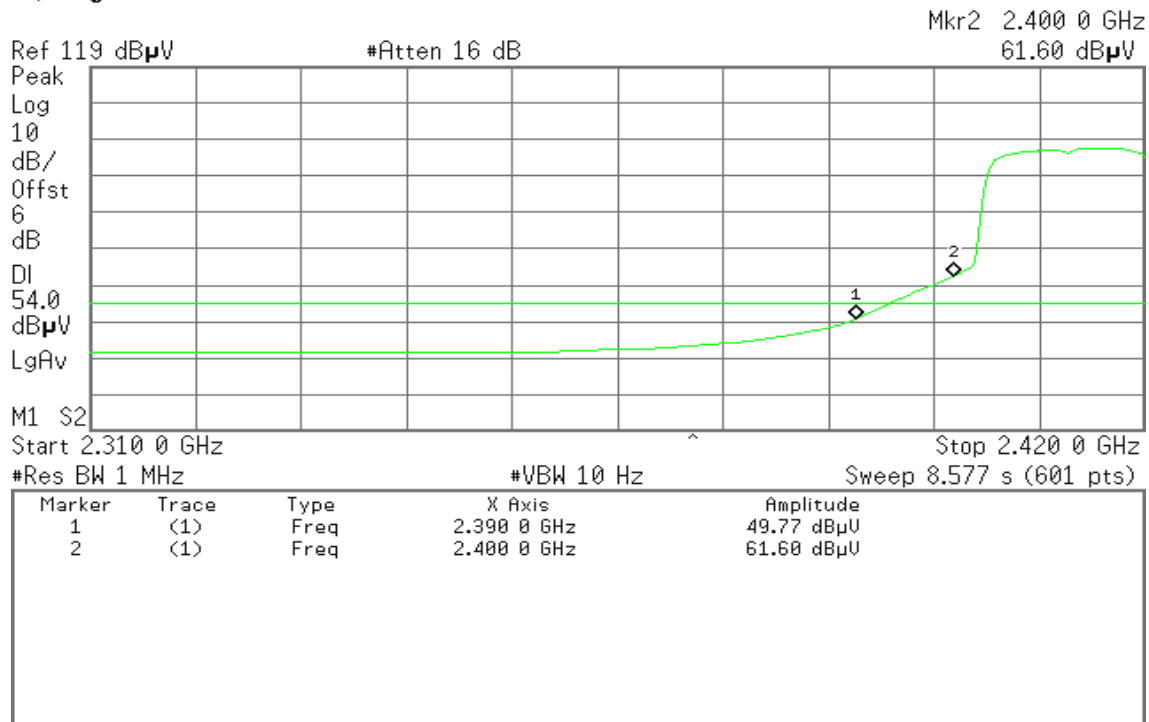

**Band Edges (IEEE 802.11g mode / CH High)****Detector mode: Peak****Polarity: Vertical**

Agilent 10:54:56 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
70.41 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

Agilent 10:54:30 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
50.99 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

**Detector mode: Peak****Polarity: Horizontal**

* Agilent 11:00:45 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
70.25 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

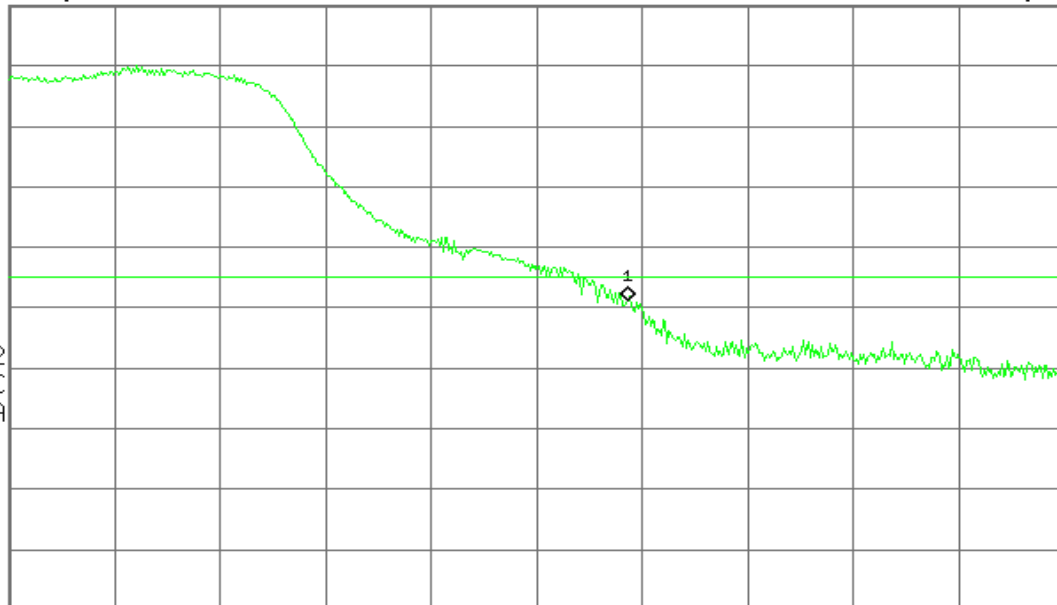

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

* Agilent 11:00:15 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
49.59 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

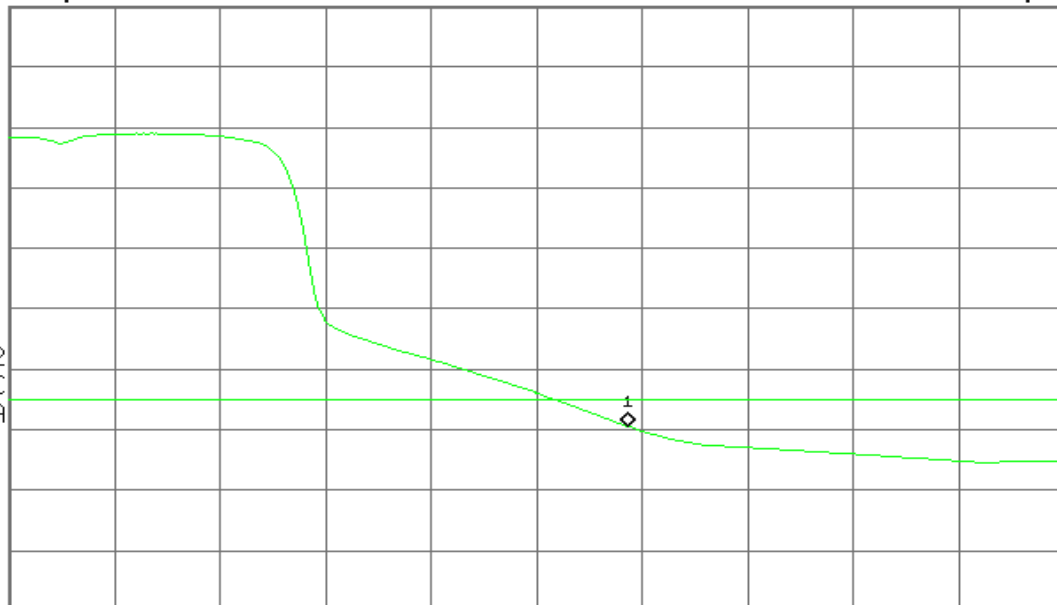

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz


#VBW 10 Hz

Sweep 3.119 s (601 pts)

**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 11:26:35 Oct 4, 2010

R T

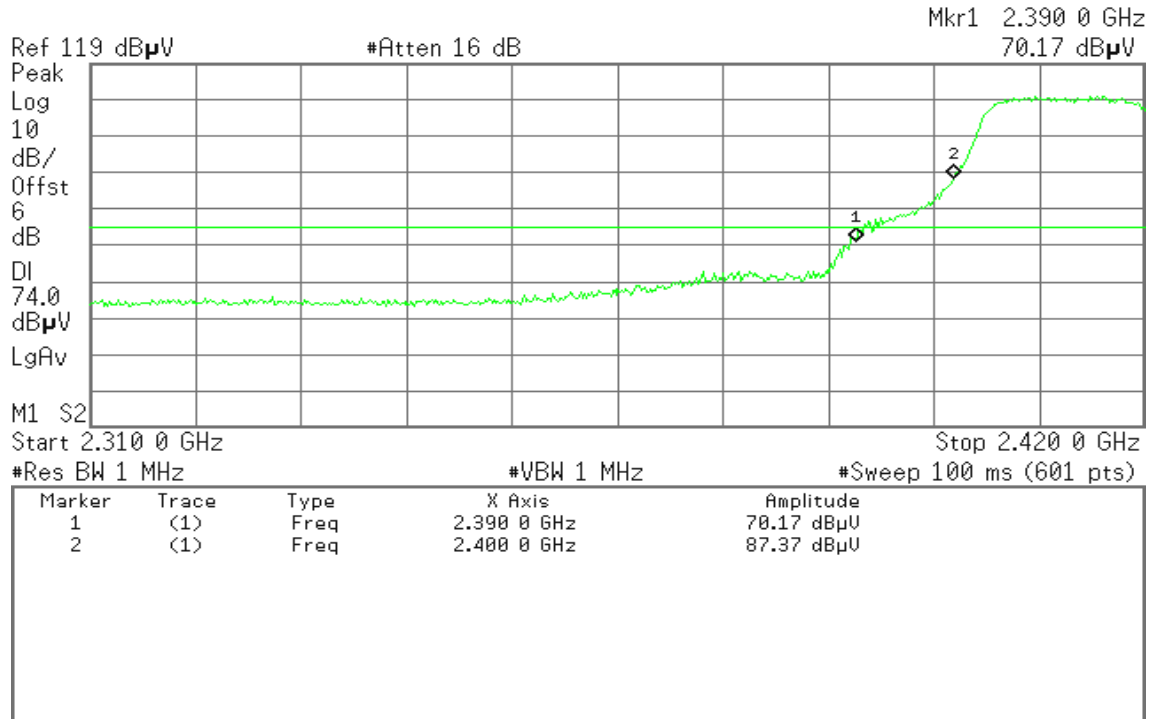**Detector mode: Average****Polarity: Vertical**

* Agilent 11:25:18 Oct 4, 2010

R T

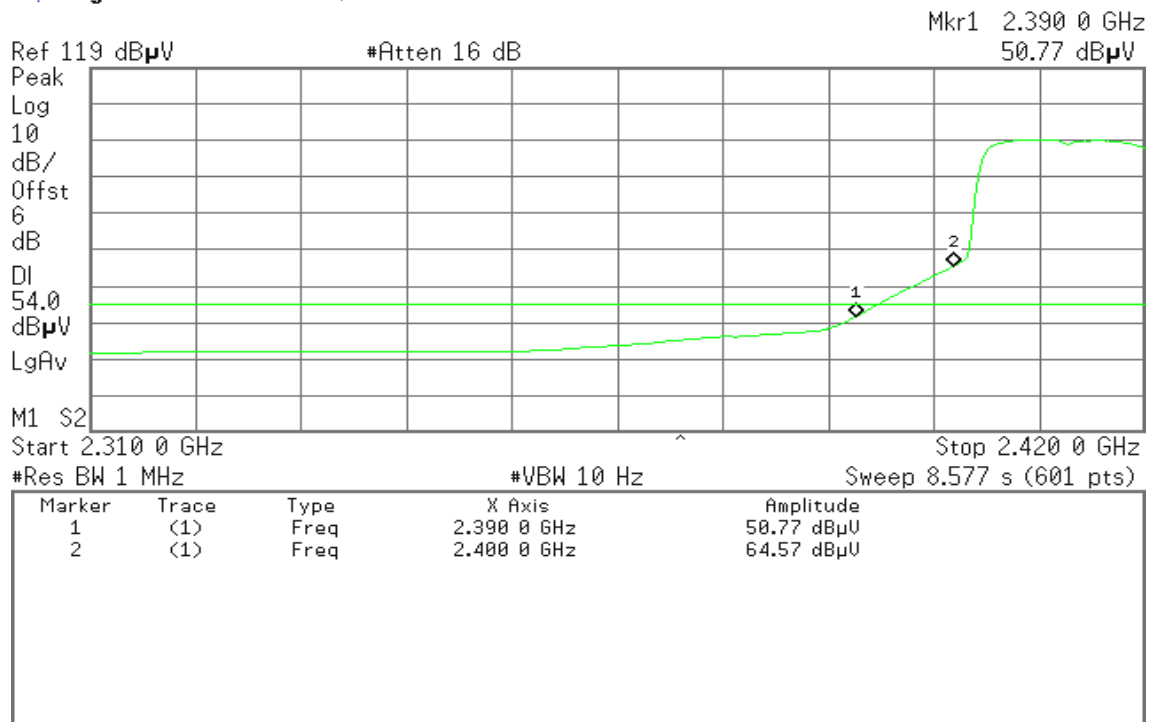



Detector mode: Peak

Polarity: Horizontal

* Agilent 11:19:33 Oct 4, 2010

R T

Mkr2 2.400 0 GHz
82.31 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	65.07 dB μ V
2	(1)	Freq	2.400 0 GHz	82.31 dB μ V

Detector mode: Average

Polarity: Horizontal

* Agilent 11:18:47 Oct 4, 2010

R T

Mkr2 2.400 0 GHz
60.85 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	50.06 dB μ V
2	(1)	Freq	2.400 0 GHz	60.85 dB μ V

**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**

* Agilent 11:37:51 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
68.28 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

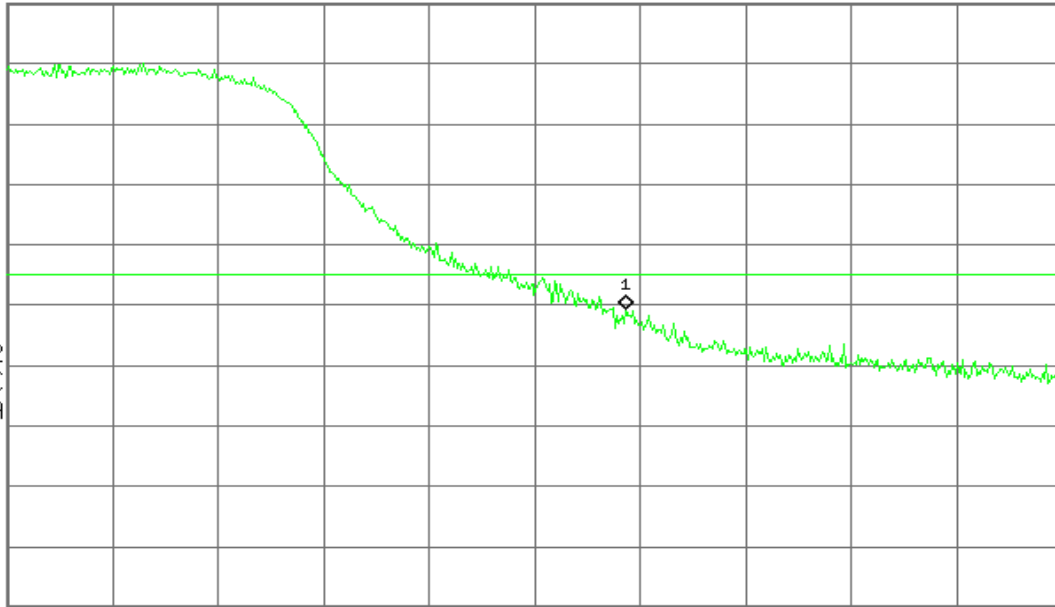

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

* Agilent 11:37:29 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
50.52 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

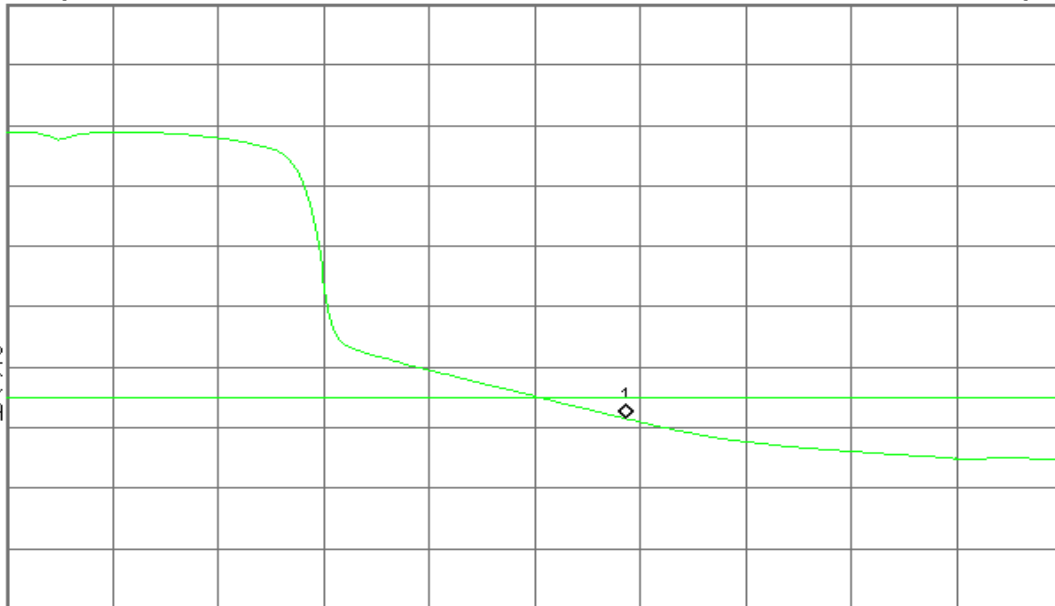

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

**Detector mode: Peak****Polarity: Horizontal**

* Agilent 11:50:20 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
64.43 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

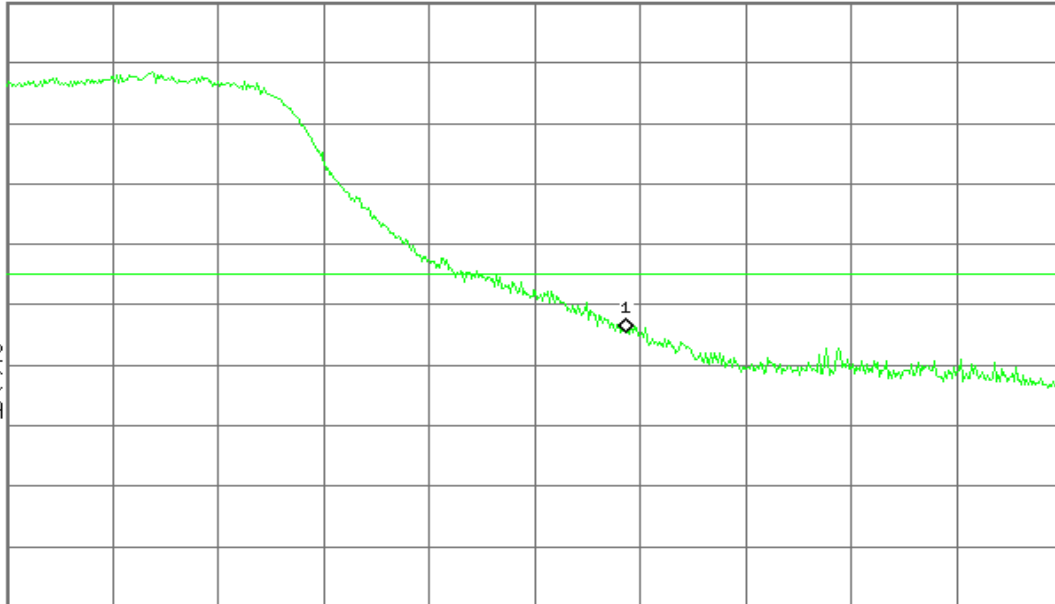

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

* Agilent 11:49:26 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
47.11 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

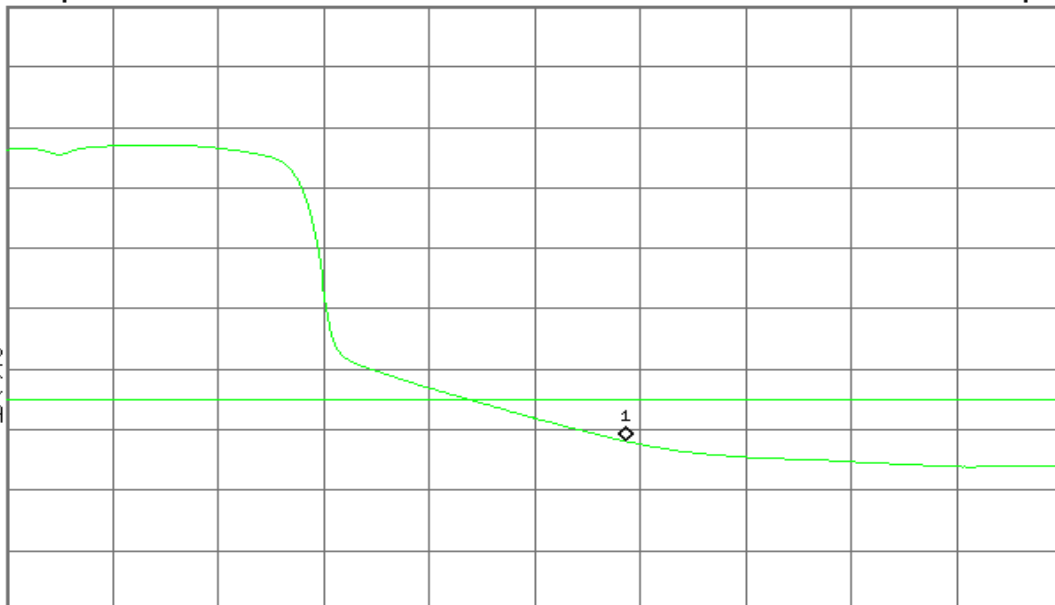

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


^ Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


* Agilent 13:36:50 Oct 4, 2010

R T

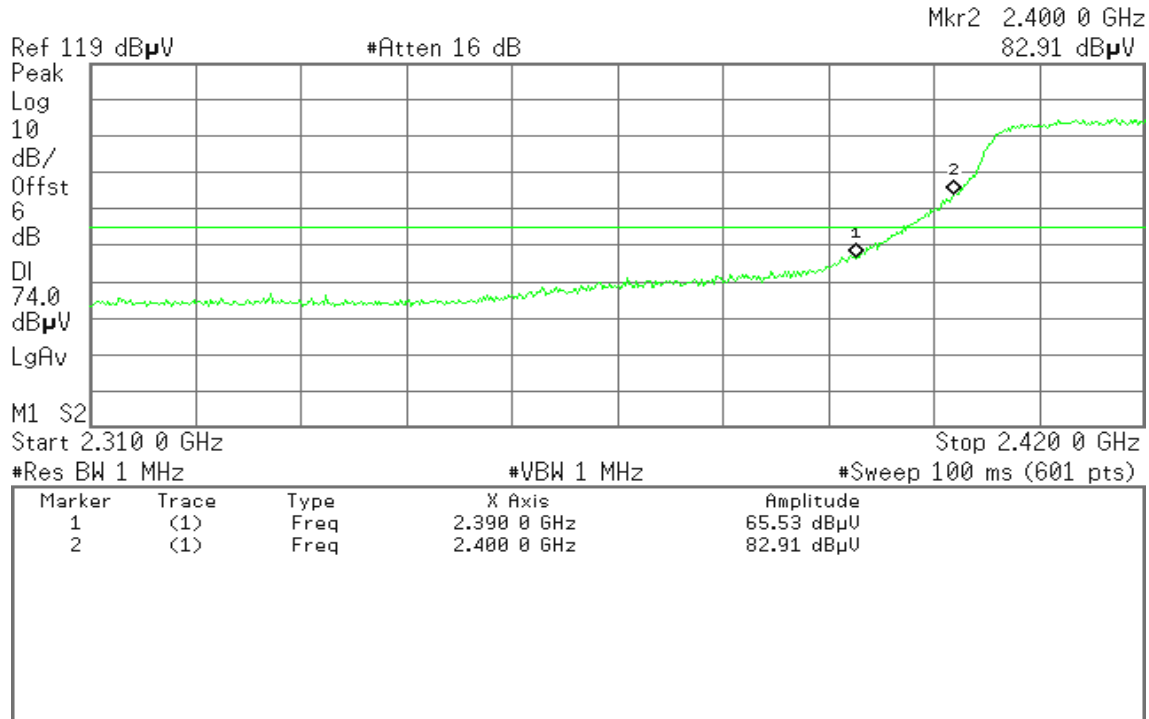**Detector mode: Average****Polarity: Vertical**

* Agilent 13:27:04 Oct 4, 2010

R T

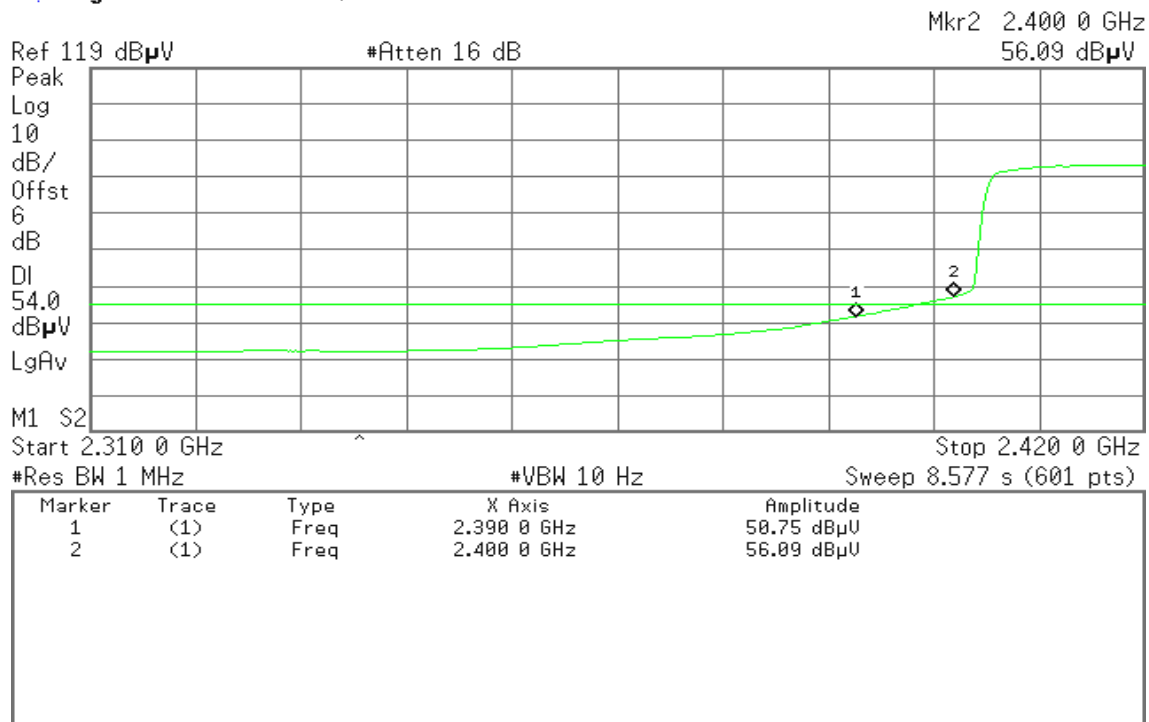



Detector mode: Peak

Polarity: Horizontal

* Agilent 13:29:11 Oct 4, 2010

R T

Mkr2 2.400 0 GHz
79.13 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	65.06 dB μ V
2	(1)	Freq	2.400 0 GHz	79.13 dB μ V

Detector mode: Average

Polarity: Horizontal

* Agilent 13:36:31 Oct 4, 2010

R T

Mkr2 2.400 0 GHz
54.97 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

Start 2.310 0 GHz ^

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	50.31 dB μ V
2	(1)	Freq	2.400 0 GHz	54.97 dB μ V

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**

* Agilent 12:03:08 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
61.32 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average**Polarity: Vertical**

* Agilent 12:02:47 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
46.74 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2

S3 FC

A AA

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.460 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

^ Stop 2.500 00 GHz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal

* Agilent 11:58:11 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
59.32 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

74.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

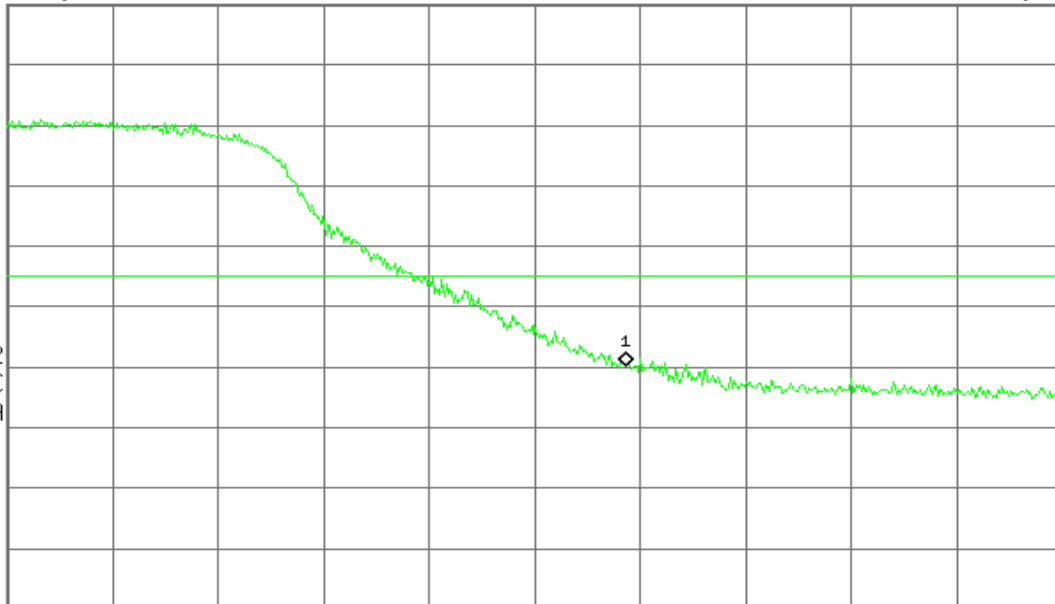

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

* Agilent 11:57:49 Oct 4, 2010

R T

Mkr1 2.483 50 GHz
44.57 dB μ VRef 119 dB μ V

#Atten 16 dB

Peak

Log

10

dB/

Offst

6

dB

DI

54.0

dB μ V

LgAv

M1 S2


S3 FC

A AA

E(f):

FTun

Swp

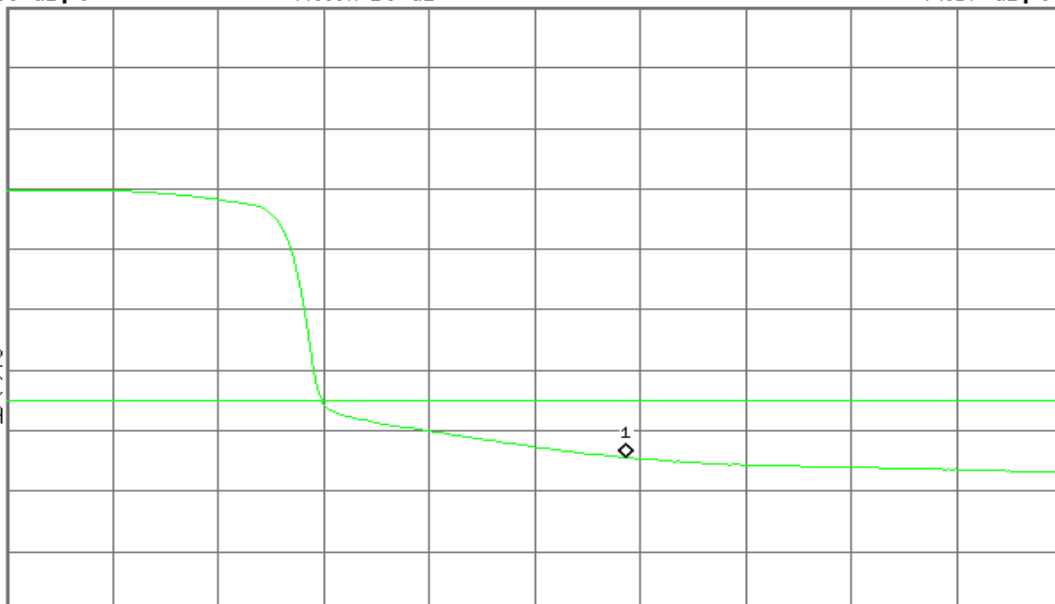

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




8.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e) & RSS-210 §A8.2, for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f) & RSS-210 §A8.3, the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

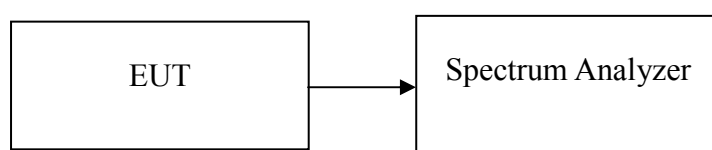

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.37	8.00	PASS
Mid	2437	-5.85		PASS
High	2462	-9.30		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.59	8.00	PASS
Mid	2437	-7.99		PASS
High	2462	-13.58		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.97	8.00	PASS
Mid	2437	-7.60		PASS
High	2462	-13.65		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-20.37	8.00	PASS
Mid	2437	-16.40		PASS
High	2452	-19.49		PASS



Test Plot

IEEE 802.11b mode


PPSD (CH Low)

* Agilent 06:42:49 Oct 7, 2010

R T

Mkr1 2.409 208 0 GHz

-9.37 dBm

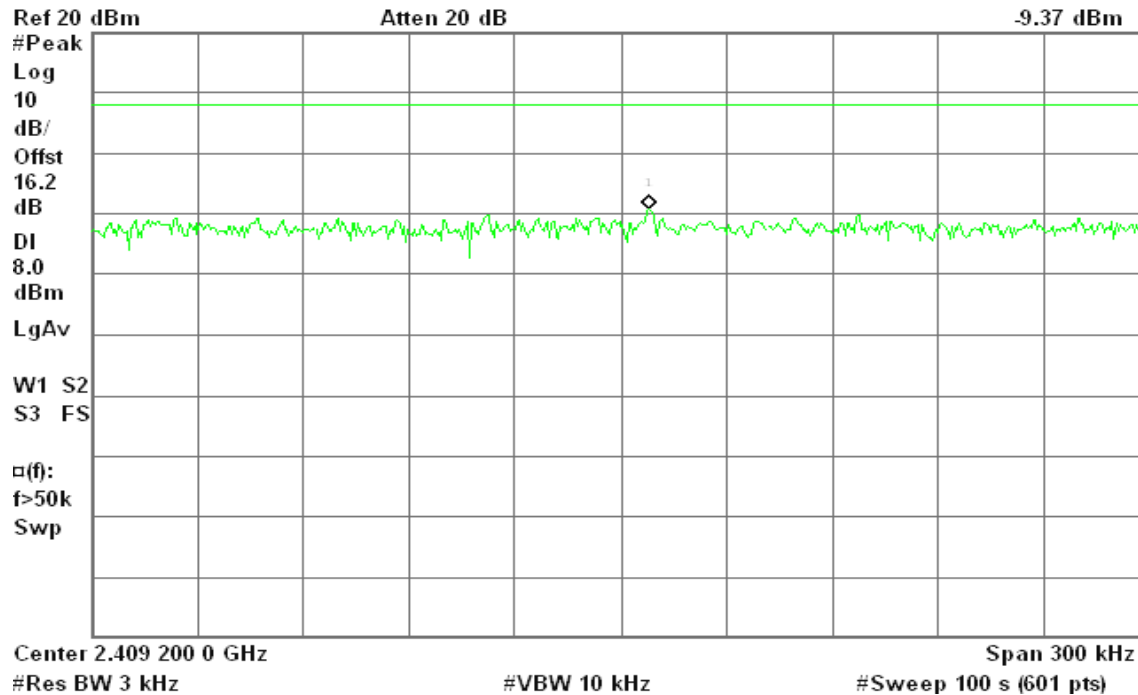


PPSD (CH Mid)

* Agilent 06:37:00 Oct 7, 2010

R T

Mkr1 2.437 764 6 GHz

-5.85 dBm

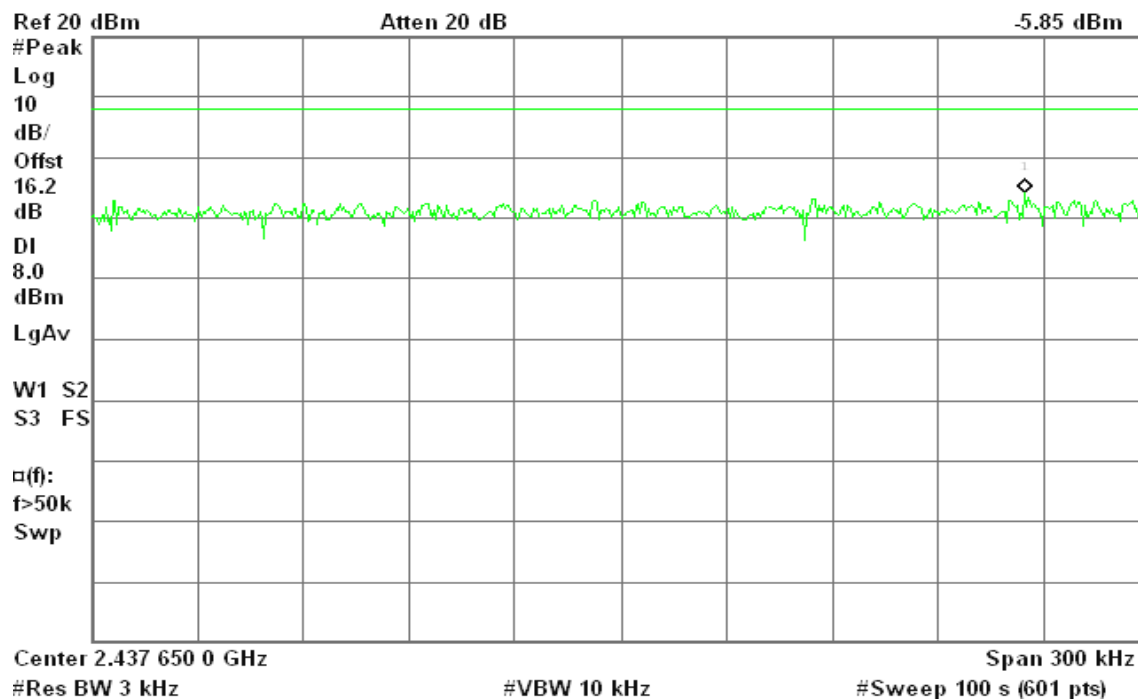




PPSD (CH High)

* Agilent 06:32:07 Oct 7, 2010

R T

Mkr1 2.459 485 9 GHz

-9.30 dBm

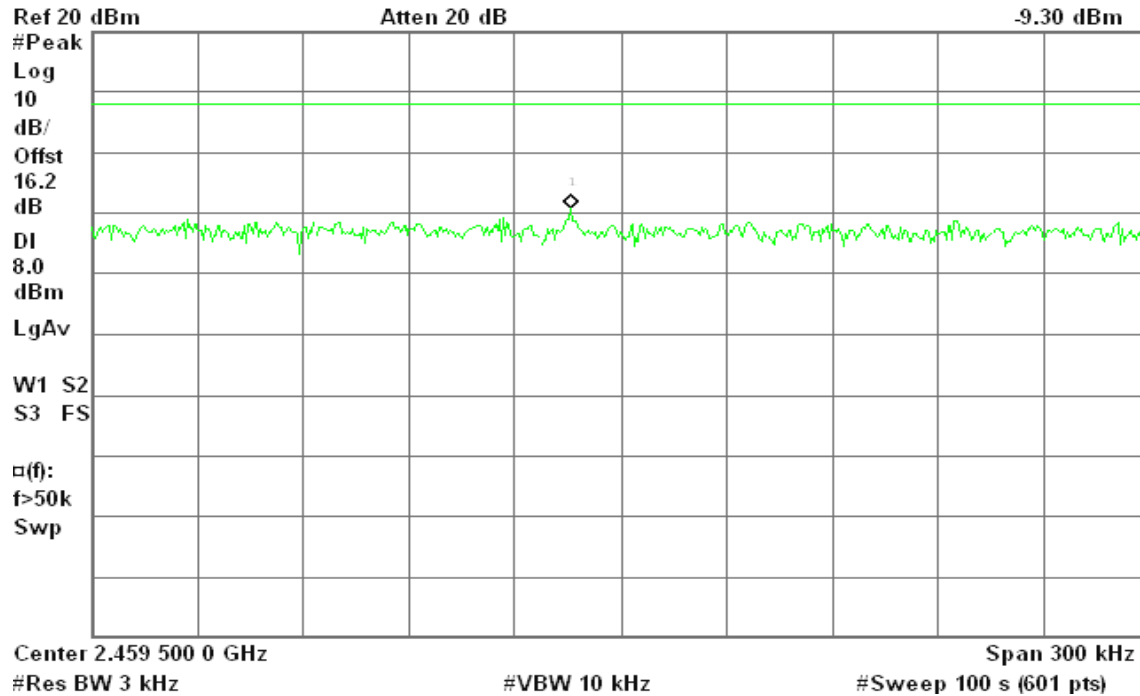

IEEE 802.11g mode


PPSD (CH Low)

* Agilent 06:21:59 Oct 7, 2010

R T

Mkr1 2.416 083 6 GHz

-14.59 dBm

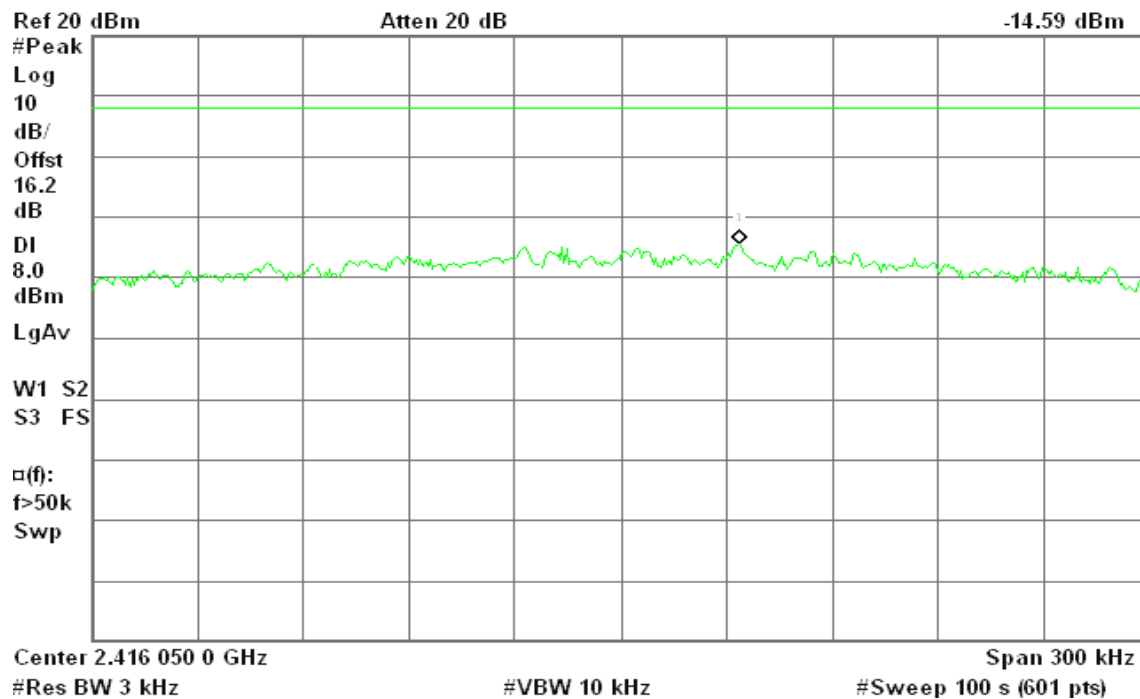




PPSD (CH Mid)

* Agilent 06:16:28 Oct 7, 2010

R T

Mkr1 2.437 617 1 GHz

-7.99 dBm

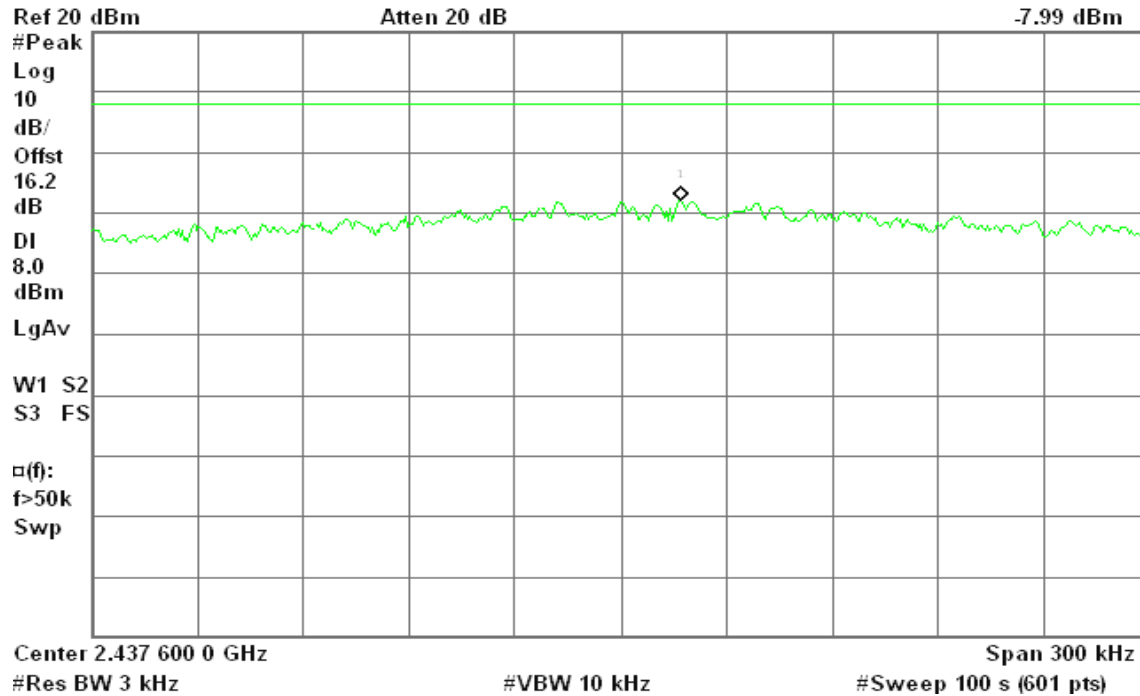


PPSD (CH High)

* Agilent 06:27:07 Oct 7, 2010

R T

Mkr1 2.457 235 2 GHz

-13.58 dBm

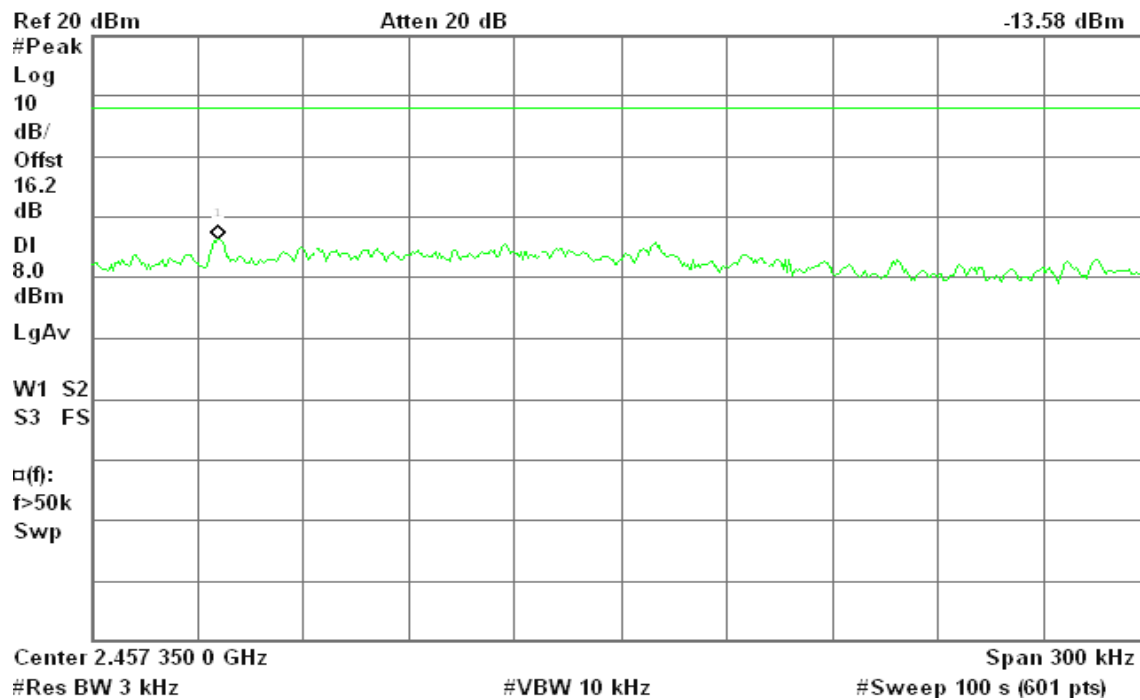



draft 802.11n Standard-20 MHz Channel mode


PPSD (CH Low)

Agilent 06:49:15 Oct 7, 2010

R T

Mkr1 2.408 860 8 GHz

-15.97 dBm

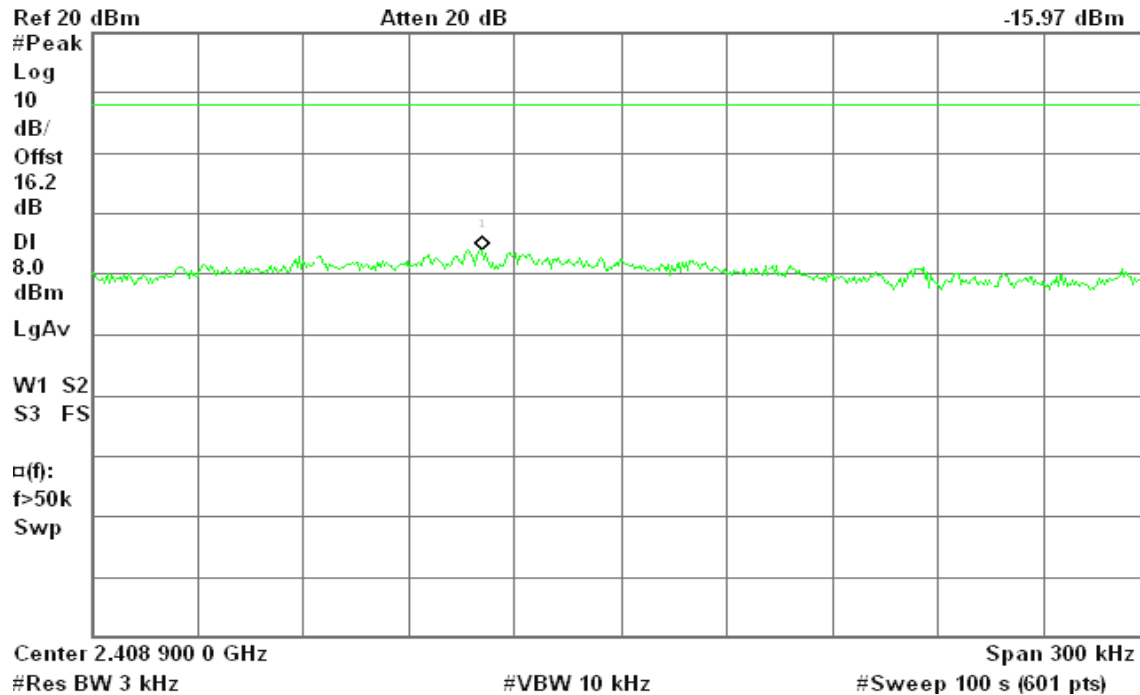


PPSD (CH Mid)

Agilent 07:00:17 Oct 7, 2010

R T

Mkr1 2.441 110 3 GHz

-7.60 dBm

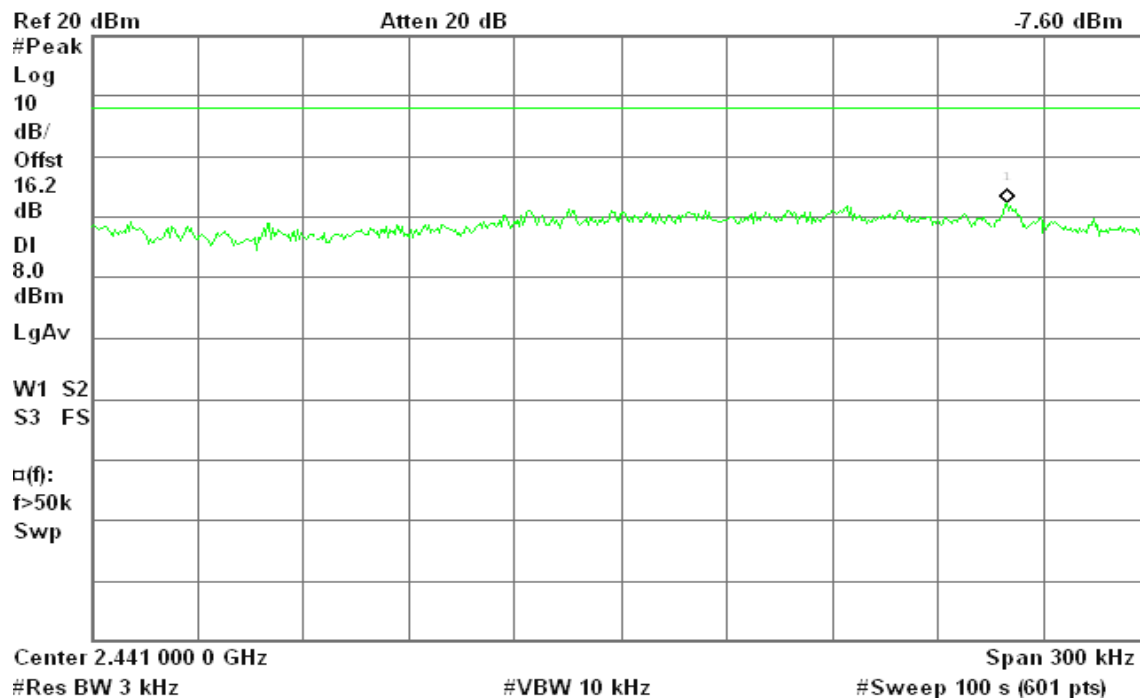




PPSD (CH High)

* Agilent 06:55:07 Oct 7, 2010

R T

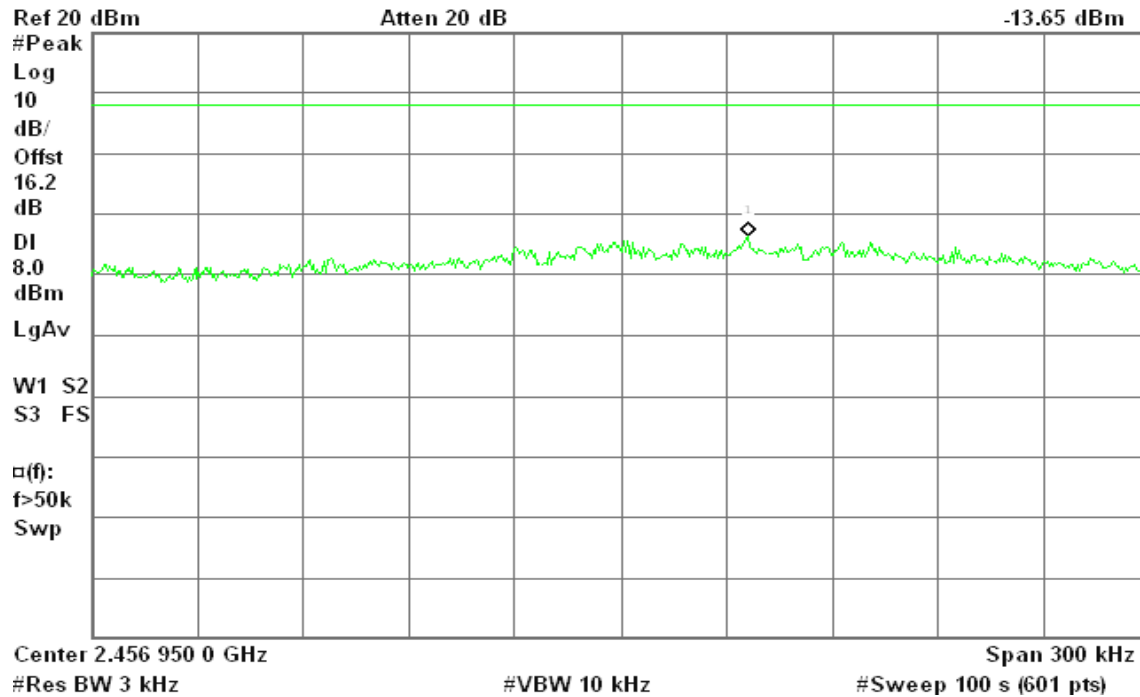
Mkr1 2.456 986 1 GHz
-13.65 dBm

draft 802.11n Wide-40 MHz Channel mode

PPSD (CH Low)

* Agilent 07:27:47 Oct 7, 2010

R T

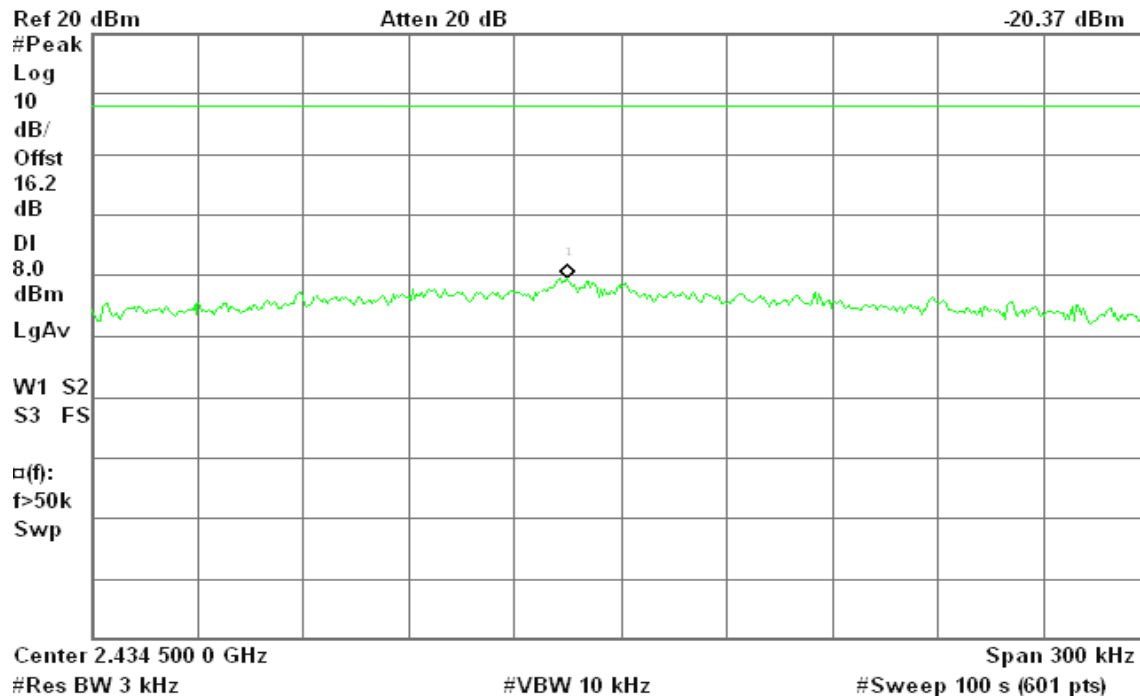
Mkr1 2.434 484 9 GHz
-20.37 dBm



PPSD (CH Mid)

* Agilent 07:38:03 Oct 7, 2010


R T

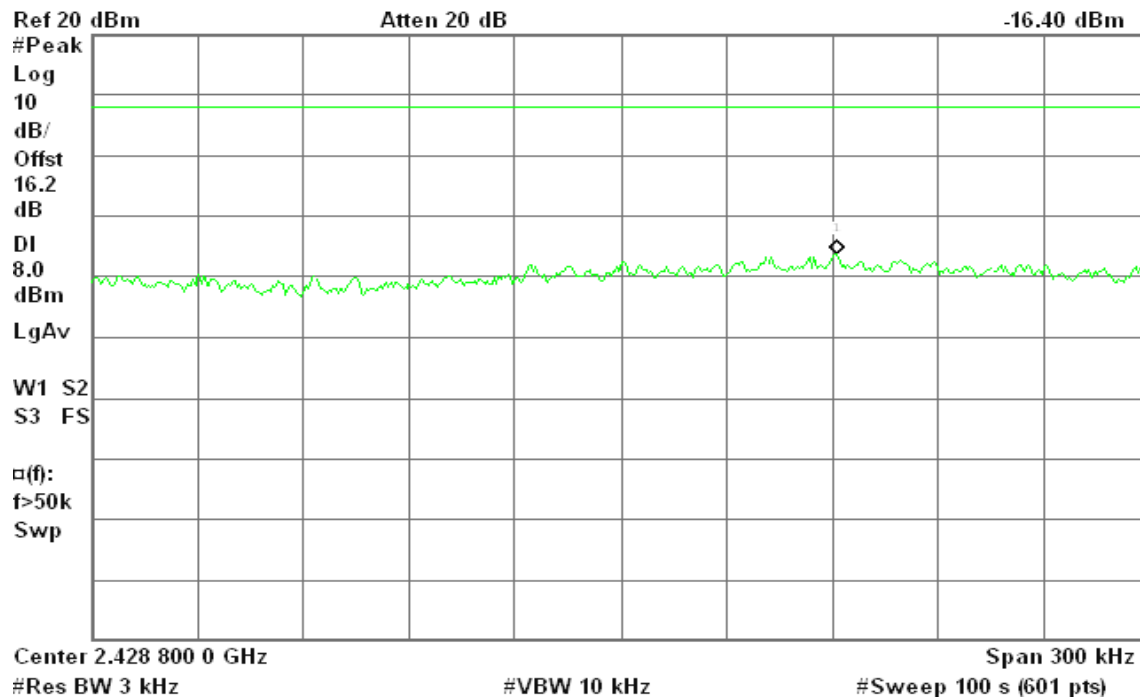Mkr1 2.428 861 6 GHz
-16.40 dBm

PPSD (CH High)

* Agilent 07:42:38 Oct 7, 2010

R T

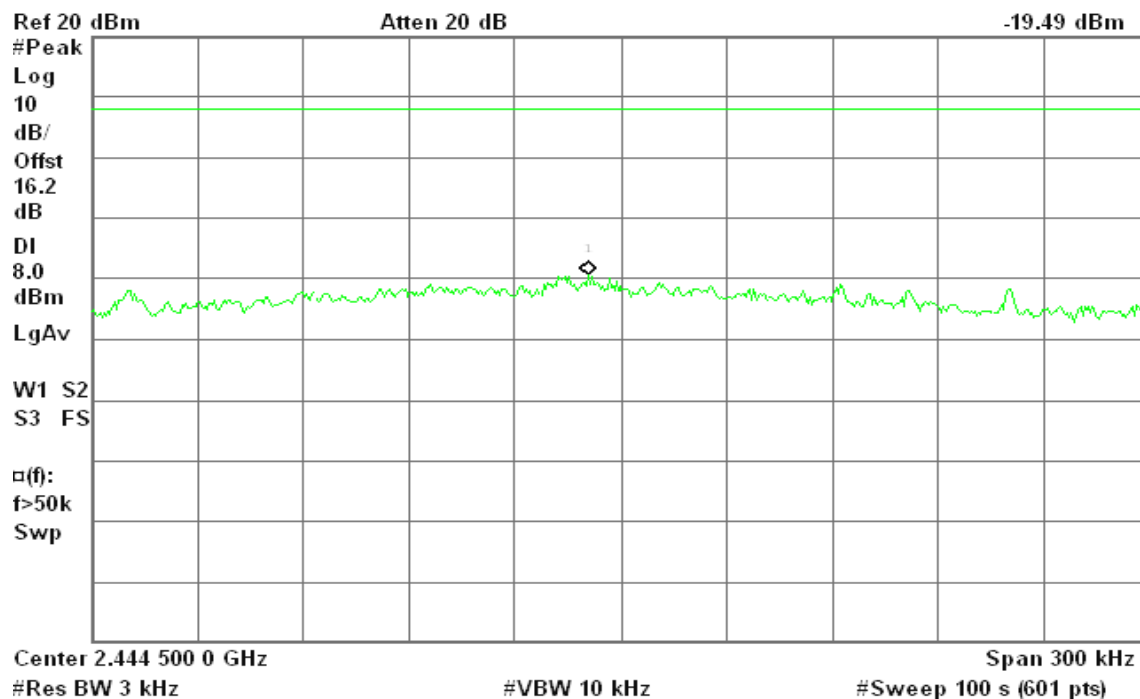Mkr1 2.444 490 5 GHz
-19.49 dBm




8.6 SPURIOUS EMISSIONS

8.6.1 Conducted Measurement

LIMIT

According to §15.247(d) & RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted

**Test Plot****IEEE 802.11b mode****CH Low**


* Agilent 07:13:27 Oct 7, 2010

R T

**CH Mid**

* Agilent 07:11:17 Oct 7, 2010

R T

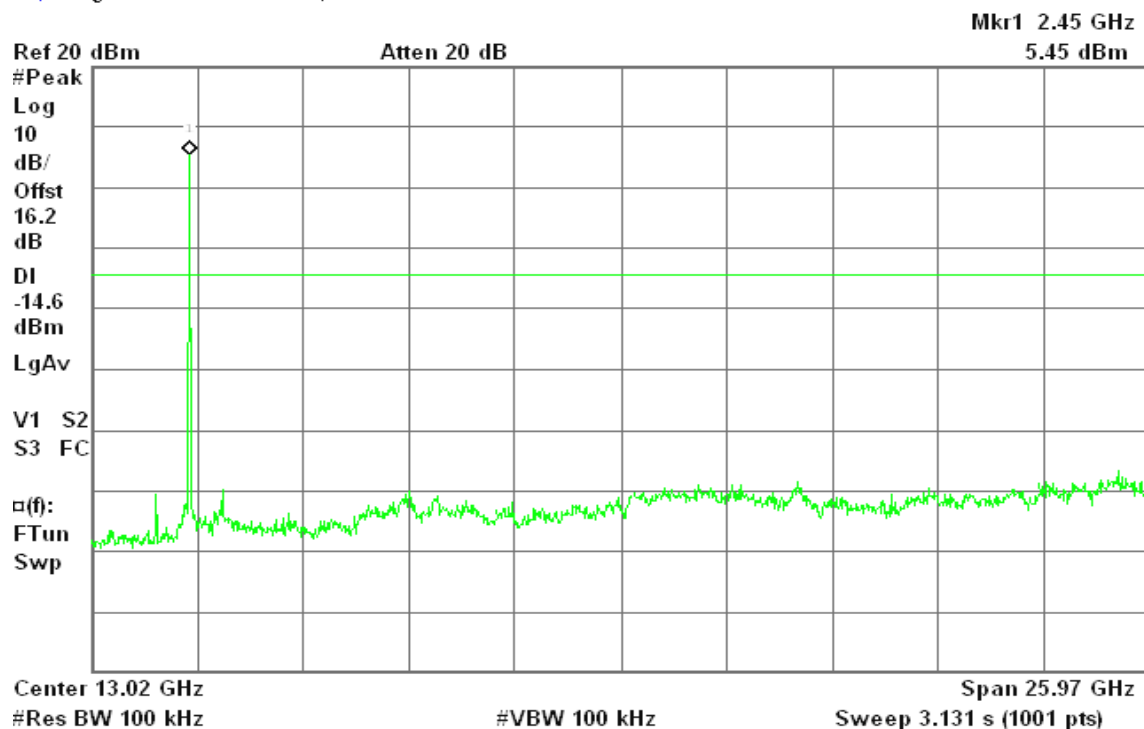

**CH High**

* Agilent 07:15:08 Oct 7, 2010

R T


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

2.03 dBm

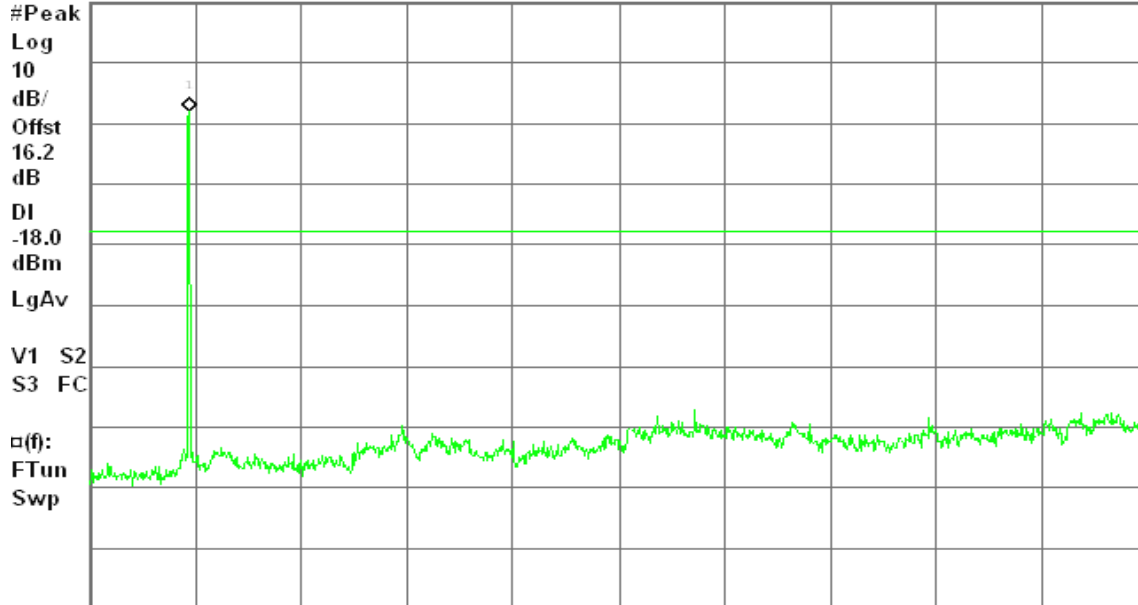

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g mode**CH Low**

* Agilent 06:23:14 Oct 7, 2010


R T

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-4.45 dBm

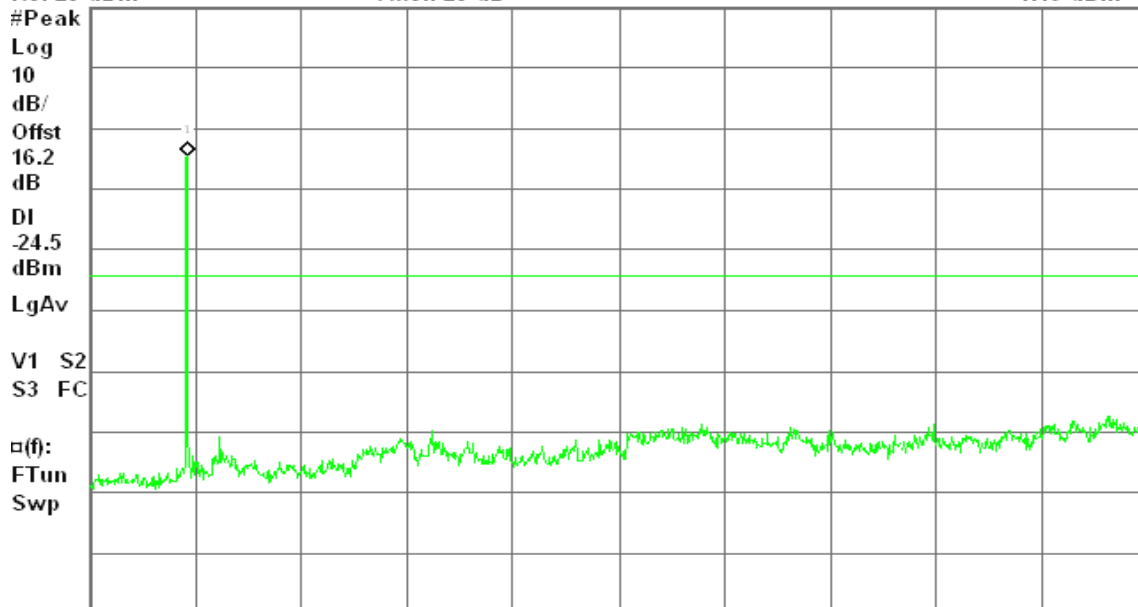

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

* Agilent 07:07:50 Oct 7, 2010

R T



CH High

* Agilent 06:27:53 Oct 7, 2010

R T






draft 802.11n Standard-20 MHz Channel mode

CH Low

Agilent 07:18:09 Oct 7, 2010


R T

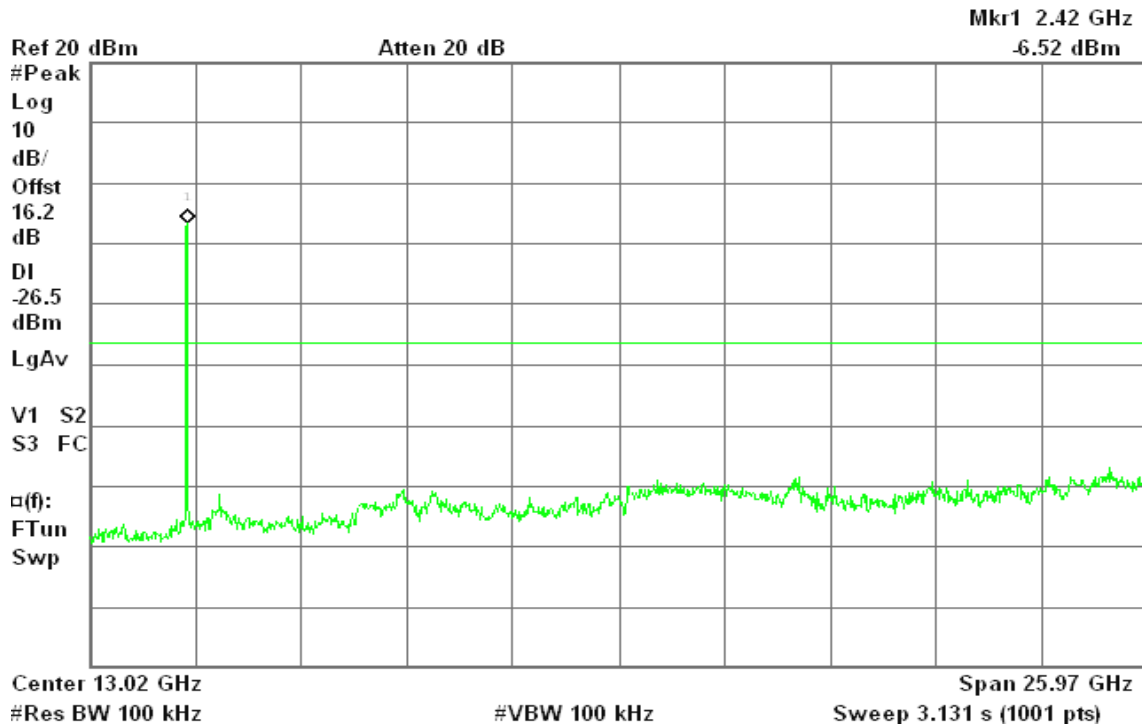

CH Mid

Agilent 07:02:48 Oct 7, 2010


R T

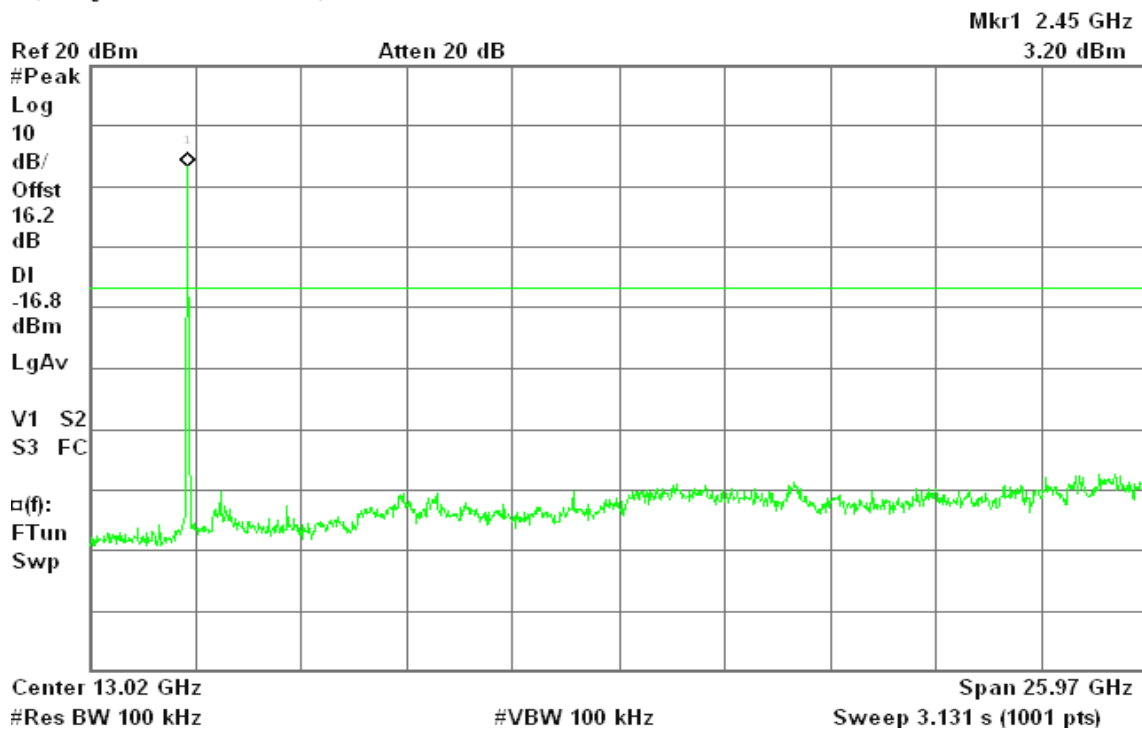

**CH High**


* Agilent 06:56:02 Oct 7, 2010

R L

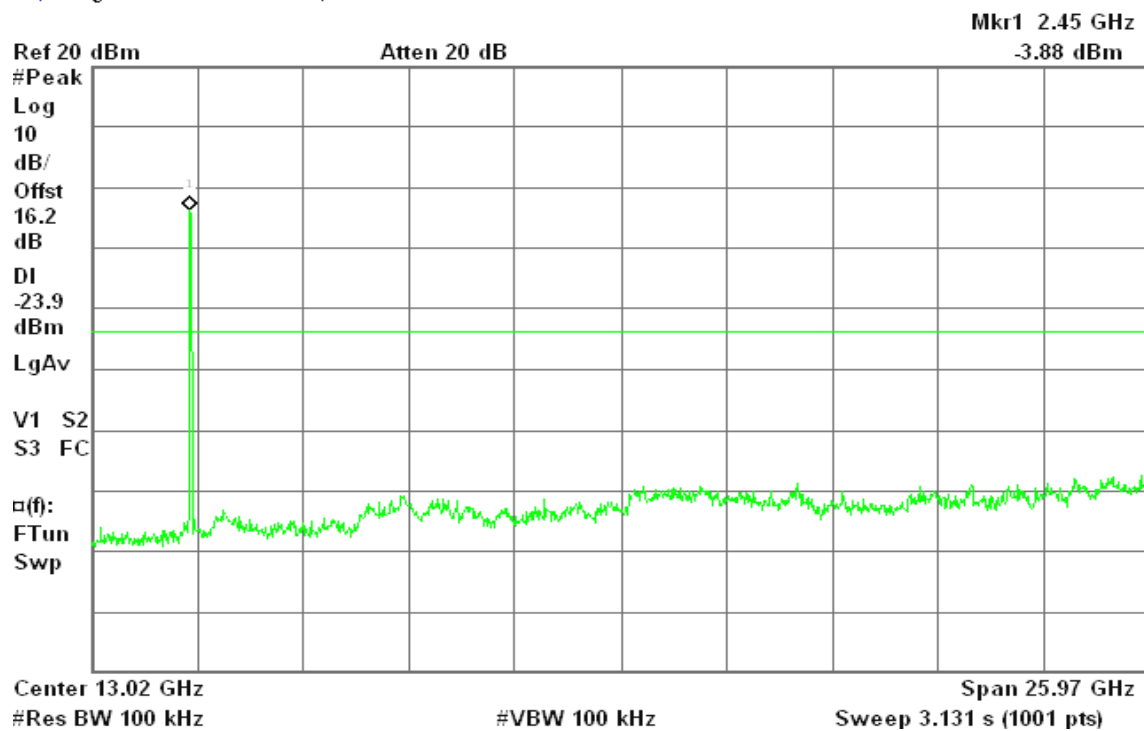**draft 802.11n Wide-40 MHz Channel mode****CH Low**

* Agilent 07:29:02 Oct 7, 2010

R T

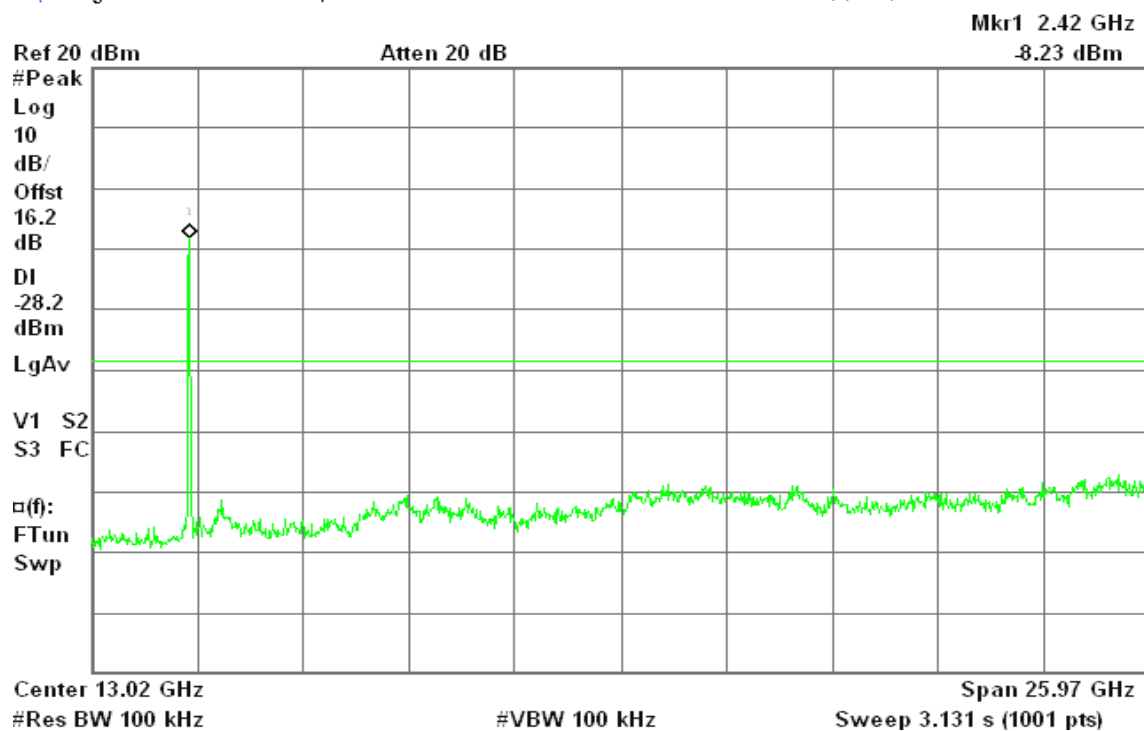




CH Mid

* Agilent 07:34:55 Oct 7, 2010


R T

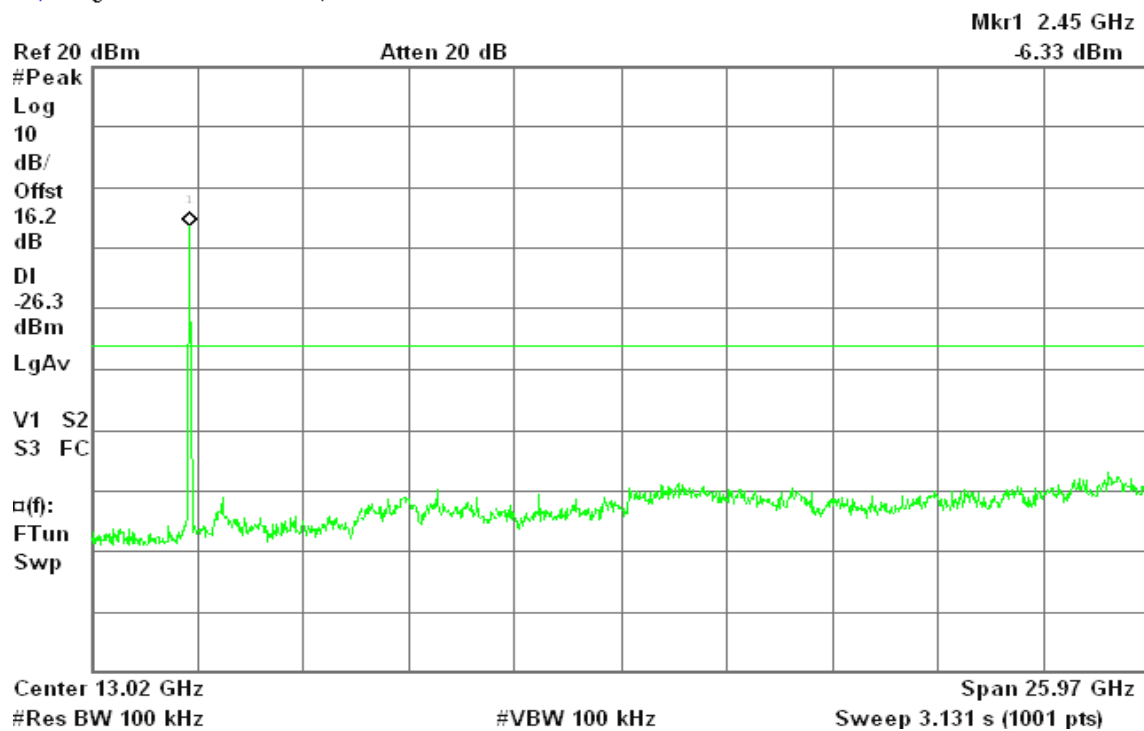

CH High

* Agilent 07:43:26 Oct 7, 2010

R T

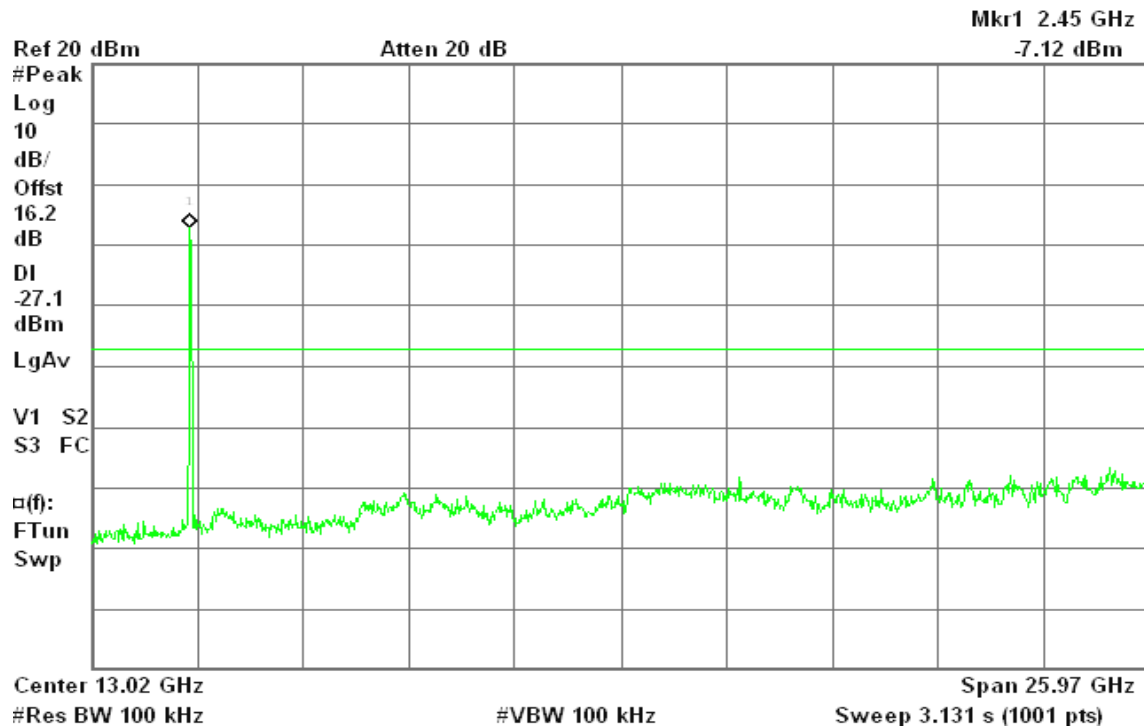



8.7 RADIATED EMISSIONS

LIMIT

1. According to §15.205, 209(a) & RSS-210 Clause 2.6 (Transmitter) and IC RSS-GEN Clause 6 (Receiver), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

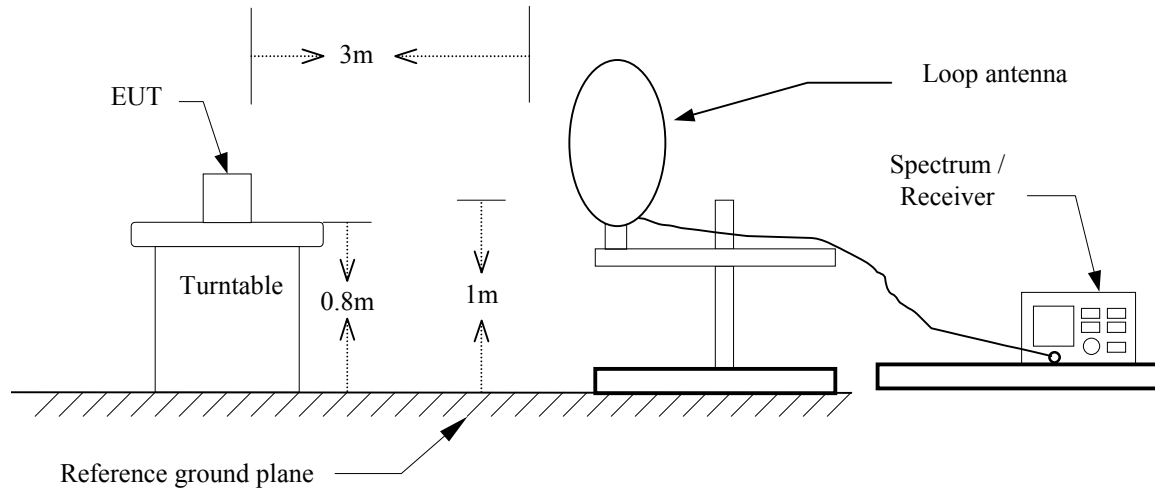


30MHz ~ 1GHz

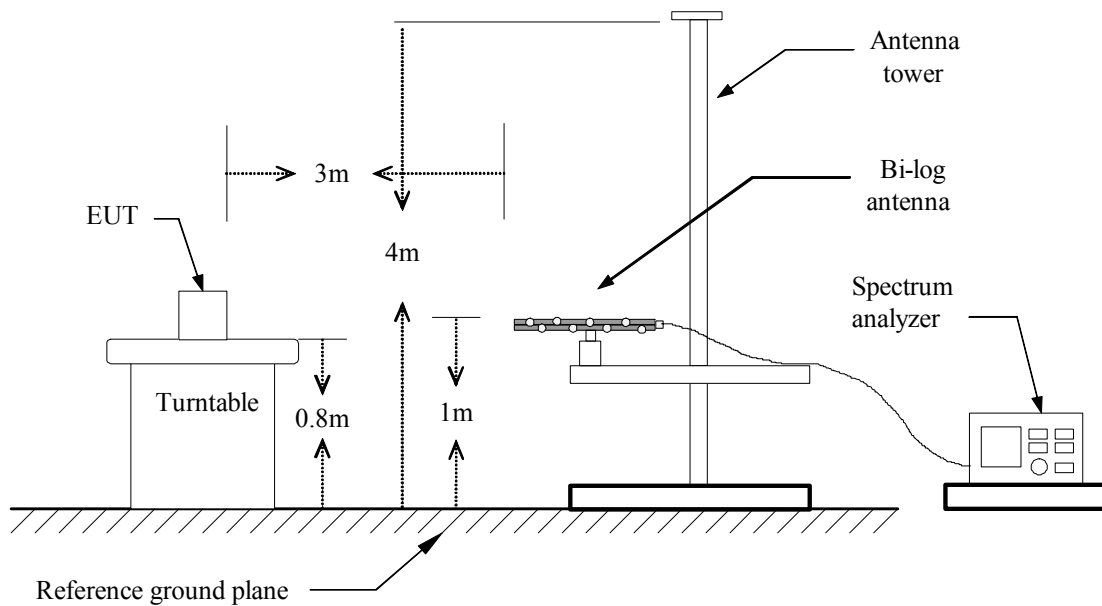



Above 1 GHz

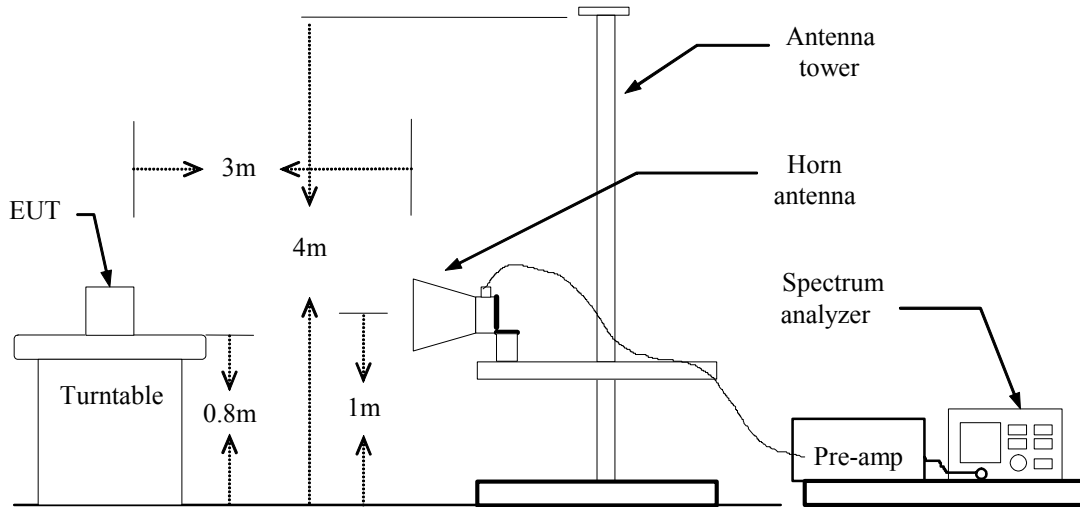



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** September 20, 2010**Temperature:** 23°C**Tested by:** Tom Jen**Humidity:** 40% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
47.78	V	47.05	-13.87	33.19	40.00	-6.81	Peak
209.45	V	50.14	-10.65	39.49	43.50	-6.01	Peak
372.73	V	42.45	-7.61	34.84	46.00	-11.16	Peak
532.78	V	40.29	-4.70	35.59	46.00	-10.41	Peak
715.47	V	38.85	-2.32	36.53	46.00	-9.47	Peak
959.58	V	33.79	0.44	34.23	46.00	-11.77	Peak
206.22	H	46.68	-10.40	36.28	43.50	-7.22	Peak
241.78	H	47.65	-11.06	36.60	46.00	-9.40	Peak
358.18	H	42.08	-7.89	34.18	46.00	-11.82	Peak
524.70	H	37.59	-4.81	32.78	46.00	-13.22	Peak
721.93	H	40.77	-2.22	38.55	46.00	-7.45	Peak
959.58	H	34.72	0.44	35.16	46.00	-10.84	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).



For Monopole Antenna

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low**Test Date:** October 5, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1273.33	V	58.16	35.50	-9.14	49.02	26.36	74.00	54.00	-27.64	AVG
N/A										
1256.67	H	58.94	35.70	-9.16	49.78	26.54	74.00	54.00	-27.46	AVG
3216.67	H	58.20	48.36	-1.17	57.03	47.19	74.00	54.00	-6.81	AVG
7225.00	H	49.10	35.16	5.24	54.34	40.40	74.00	54.00	-13.60	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** October 5, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1196.67	V	58.66	35.43	-9.26	49.39	26.17	74.00	54.00	-27.83	AVG
3250.00	V	55.80	47.12	-1.16	54.64	45.96	74.00	54.00	-8.04	AVG
7308.33	V	48.83	33.81	5.29	54.12	39.10	74.00	54.00	-14.90	AVG
N/A										
1160.00	H	58.56	35.10	-9.32	49.24	25.78	74.00	54.00	-28.22	AVG
3250.00	H	57.10	46.16	-1.16	55.94	45.00	74.00	54.00	-9.00	AVG
7308.33	H	50.10	35.28	5.29	55.39	40.57	74.00	54.00	-13.43	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** October 5, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1280.00	V	56.67	---	-9.13	47.54	---	74.00	54.00	-6.46	Peak
3283.33	V	55.80	46.50	-1.15	54.65	45.35	74.00	54.00	-8.65	AVG
N/A										
1170.00	H	56.73	---	-9.31	47.42	---	74.00	54.00	-6.58	Peak
3283.33	H	55.10	45.80	-1.15	53.95	44.65	74.00	54.00	-9.35	AVG
4925.00	H	54.30	46.73	1.14	55.44	47.87	74.00	54.00	-6.13	AVG
7383.33	H	50.43	33.75	5.34	55.78	39.09	74.00	54.00	-14.91	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** October 5, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1196.67	V	57.18	---	-9.26	47.92	---	74.00	54.00	-6.08	Peak
N/A										
1193.33	H	56.53	---	-9.27	47.26	---	74.00	54.00	-6.74	Peak
3216.67	H	55.95	47.91	-1.17	54.78	46.74	74.00	54.00	-7.26	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** October 5, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1260.00	V	56.86	---	-9.16	47.70	---	74.00	54.00	-6.30	Peak
3250.00	V	56.41	48.37	-1.16	55.25	47.21	74.00	54.00	-6.79	AVG
N/A										
1226.67	H	56.33	---	-9.21	47.12	---	74.00	54.00	-6.88	Peak
3250.00	H	49.11	---	-1.16	47.95	---	74.00	54.00	-6.05	Peak
7308.33	H	51.97	35.02	5.29	57.26	40.31	74.00	54.00	-13.69	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** October 5, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1160.00	V	57.30	---	-9.32	47.97	---	74.00	54.00	-6.03	Peak
3283.33	V	55.51	47.50	-1.15	54.36	46.35	74.00	54.00	-7.65	AVG
N/A										
1290.00	H	56.69	---	-9.11	47.58	---	74.00	54.00	-6.42	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: October 5, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1270.00	V	56.64	---	-9.14	47.50	---	74.00	54.00	-6.50	Peak
3216.67	V	55.32	45.30	-1.17	54.15	44.13	74.00	54.00	-9.87	AVG
N/A										
1206.67	H	56.98	---	-9.25	47.73	---	74.00	54.00	-6.27	Peak
3216.67	H	56.10	46.83	-1.17	54.93	45.66	74.00	54.00	-8.34	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid**Test Date:** October 5, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1096.67	V	56.57	---	-9.43	47.14	---	74.00	54.00	-6.86	Peak
3250.00	V	55.90	46.40	-1.16	54.74	45.24	74.00	54.00	-8.76	AVG
N/A										
1103.33	H	56.79	---	-9.42	47.38	---	74.00	54.00	-6.62	Peak
3250.00	H	55.45	46.38	-1.16	54.29	45.22	74.00	54.00	-8.78	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: October 5, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1160.00	V	56.83	---	-9.32	47.51	---	74.00	54.00	-6.49	Peak
3283.33	V	55.78	46.30	-1.15	54.63	45.15	74.00	54.00	-8.85	AVG
N/A										
1056.67	H	56.76	---	-9.50	47.26	---	74.00	54.00	-6.74	Peak
3283.33	H	55.30	45.73	-1.15	54.15	44.58	74.00	54.00	-9.42	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Low

Test Date: October 5, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1176.67	V	56.88	---	-9.30	47.58	---	74.00	54.00	-6.42	Peak
3233.33	V	55.41	45.35	-1.16	54.25	44.19	74.00	54.00	-9.81	AVG
N/A										
1326.67	H	56.56	---	-9.05	47.51	---	74.00	54.00	-6.49	Peak
3233.33	H	56.30	46.10	-1.16	55.14	44.94	74.00	54.00	-9.06	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Mid

Test Date: October 5, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1340.00	V	56.13	---	-9.03	47.10	---	74.00	54.00	-6.90	Peak
3250.00	V	55.28	45.40	-1.16	54.12	44.24	74.00	54.00	-9.76	AVG
N/A										
1190.00	H	56.25	---	-9.27	46.98	---	74.00	54.00	-7.02	Peak
3250.00	H	55.30	45.90	-1.16	54.14	44.74	74.00	54.00	-9.26	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH High

Test Date: October 5, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1326.67	V	56.00	---	-9.05	46.95	---	74.00	54.00	-7.05	Peak
3266.67	V	56.23	46.10	-1.16	55.07	44.94	74.00	54.00	-9.06	AVG
N/A										
1293.33	H	56.62	---	-9.10	47.52	---	74.00	54.00	-6.48	Peak
3266.67	H	55.45	45.83	-1.16	54.29	44.67	74.00	54.00	-9.33	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**For PIFA Antenna****Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** October 4, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1493.33	V	56.20	---	-8.77	47.43	---	74.00	54.00	-6.57	Peak
3216.67	V	51.64	46.36	-1.17	50.48	45.19	74.00	54.00	-8.81	AVG
N/A										
1576.67	H	58.16	35.40	-8.05	50.10	27.35	74.00	54.00	-26.65	AVG
4825.00	H	52.96	44.50	1.18	54.14	45.68	74.00	54.00	-8.32	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** October 4, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1996.67	V	59.09	44.65	-4.18	54.91	40.47	74.00	54.00	-13.53	AVG
N/A										
4875.00	H	54.59	46.81	1.16	55.75	47.79	74.00	54.00	-6.03	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** October 4, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1606.67	V	58.35	36.37	-7.78	50.57	28.59	74.00	54.00	-25.41	AVG
4925.00	V	47.78	36.88	1.14	48.92	38.02	74.00	54.00	-15.98	AVG
N/A										
1620.00	H	57.96	36.80	-7.65	50.31	29.15	74.00	54.00	-24.85	AVG
4925.00	H	53.57	46.73	1.14	54.71	47.87	74.00	54.00	-6.13	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** October 4, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	58.16	35.80	-8.76	49.40	27.04	74.00	54.00	-26.96	AVG
3216.67	V	49.16	---	-1.17	47.99	---	74.00	54.00	-6.01	Peak
N/A										
1553.33	H	57.79	36.10	-8.27	49.52	27.83	74.00	54.00	-26.17	AVG
3216.67	H	55.36	46.68	-1.17	54.19	45.51	74.00	54.00	-8.49	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** October 4, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1243.33	V	56.42	---	-9.19	47.23	---	74.00	54.00	-6.77	Peak
3250.00	V	55.16	48.09	-1.16	54.00	46.93	74.00	54.00	-7.07	AVG
7308.33	V	51.19	35.16	5.29	56.48	40.45	74.00	54.00	-13.55	AVG
N/A										
1450.00	H	58.13	36.10	-8.84	49.29	27.26	74.00	54.00	-26.74	AVG
3250.00	H	55.16	48.66	-1.16	54.00	47.50	74.00	54.00	-6.50	AVG
4875.00	H	52.86	38.55	1.16	54.02	39.71	74.00	54.00	-14.29	AVG
7300.00	H	57.58	37.90	5.29	62.87	43.19	74.00	54.00	-10.81	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** October 4, 2010**Temperature:** 25°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	59.17	36.00	-8.77	50.40	27.23	74.00	54.00	-26.77	AVG
3283.33	V	55.29	44.39	-1.15	54.14	43.24	74.00	54.00	-10.76	AVG
N/A										
1440.00	H	56.57	---	-8.86	47.71	---	74.00	54.00	-6.29	Peak
3283.33	H	49.10	---	-1.15	47.95	---	74.00	54.00	-6.05	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: October 4, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1196.67	V	57.12	---	-9.26	47.86	---	74.00	54.00	-6.14	Peak
3216.67	V	48.96	---	-1.17	47.79	---	74.00	54.00	-6.21	Peak
N/A										
1166.67	H	57.20	---	-9.31	47.89	---	74.00	54.00	-6.11	Peak
3216.67	H	55.24	46.79	-1.17	54.07	45.62	74.00	54.00	-8.38	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: October 4, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	58.56	35.73	-8.77	49.79	26.96	74.00	54.00	-27.04	AVG
3250.00	V	49.12	---	-1.16	47.96	---	74.00	54.00	-6.04	Peak
7300.00	V	52.73	36.13	5.29	58.02	41.42	74.00	54.00	-12.58	AVG
N/A										
1513.33	H	58.32	35.80	-8.64	49.68	27.16	74.00	54.00	-26.84	AVG
3250.00	H	55.16	48.45	-1.16	54.00	47.29	74.00	54.00	-6.71	AVG
4875.00	H	52.91	38.59	1.16	54.07	39.75	74.00	54.00	-14.25	AVG
7308.33	H	58.31	38.86	5.29	63.60	44.15	74.00	54.00	-9.85	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: October 4, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1196.67	V	56.64	---	-9.26	47.38	---	74.00	54.00	-6.62	Peak
3283.33	V	49.02	---	-1.15	47.87	---	74.00	54.00	-6.13	Peak
N/A										
1240.00	H	56.88	---	-9.19	47.69	---	74.00	54.00	-6.31	Peak
3283.33	H	55.16	44.21	-1.15	54.01	43.06	74.00	54.00	-10.94	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Low

Test Date: October 4, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1196.67	V	56.89	---	-9.26	47.63	---	74.00	54.00	-6.37	Peak
N/A										
1273.33	H	56.98	---	-9.14	47.84	---	74.00	54.00	-6.16	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH Mid

Test Date: October 4, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	58.06	35.73	-8.77	49.29	26.96	74.00	54.00	-27.04	AVG
N/A										
1326.67	H	56.70	---	-9.05	47.65	---	74.00	54.00	-6.35	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH High

Test Date: October 4, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	58.64	36.25	-8.77	49.88	-27.48	74.00	54.00	-26.52	AVG
N/A										
1260.00	H	56.94	---	-9.16	47.78	---	74.00	54.00	-6.22	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** RX / IEEE 802.11g / CH Mid**Test Date:** October 4, 2010**Temperature:** 23°C**Tested by:** Mark Yang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1596.67	V	54.68	---	-7.87	46.81	---	74.00	54.00	-7.19	Peak
N/A										
1783.33	H	53.28	---	-6.15	47.13	---	74.00	54.00	-6.87	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



8.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §7.2.2, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link


Test Date: August 20, 2010

Temperature: 21.4°C

Tested by: Vic Lin

Humidity: 59% RH

Line: L1

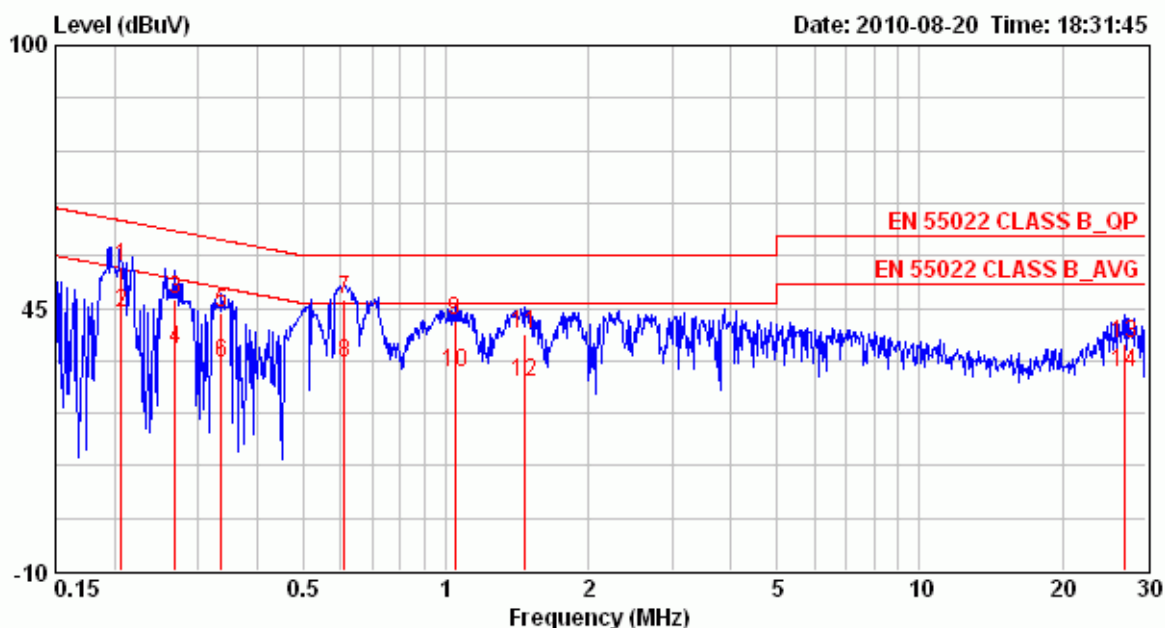

Freq. MHz	Corr. Factor dB	Reading Value dBuV		Emission Level dBuV		Limit dBuV		Margin dB	
		Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.206	0.09	53.42	43.81	53.51	43.90	63.36	53.36	-9.85	-9.46
0.269	0.09	46.91	36.38	47.00	36.47	61.16	51.16	-14.16	-14.69
0.336	0.08	43.81	33.37	43.89	33.45	59.31	49.31	-15.42	-15.86
0.611	0.10	46.53	33.52	46.63	33.62	56.00	46.00	-9.37	-12.38
1.043	0.13	42.41	31.27	42.54	31.40	56.00	46.00	-13.46	-14.60
1.464	0.15	39.57	29.52	39.72	29.67	56.00	46.00	-16.28	-16.33
26.984	0.81	36.61	30.50	37.42	31.31	60.00	50.00	-22.59	-18.70

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Operation Mode: Normal Link


Test Date: August 20, 2010

Temperature: 21.4°C

Tested by: Vic Lin

Humidity: 59% RH

Line: L2

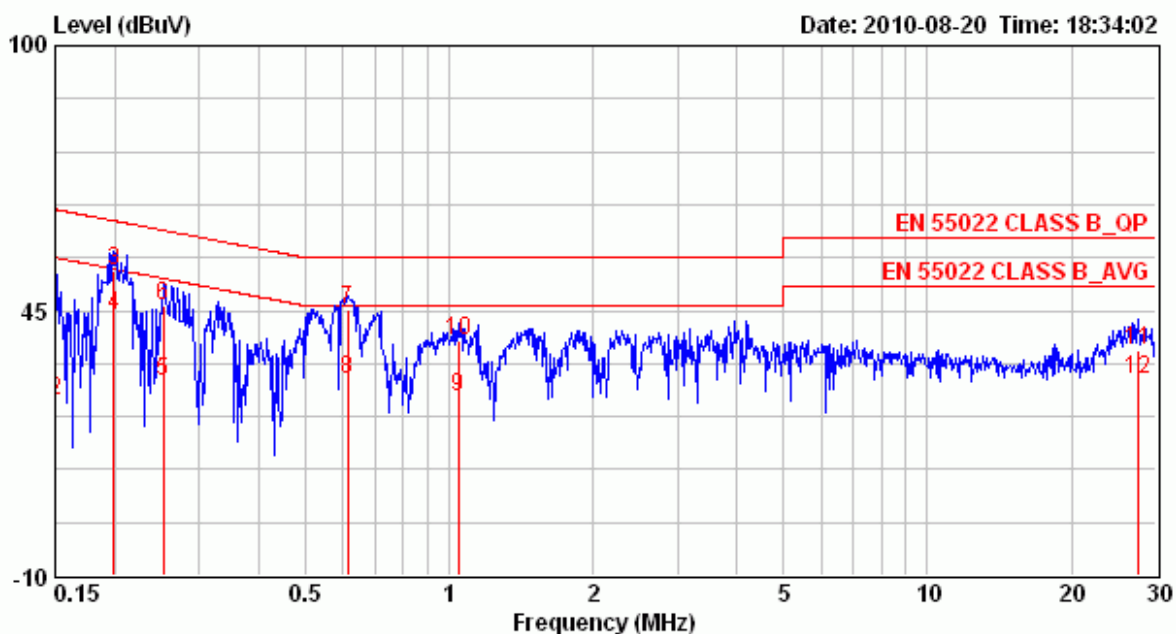

Freq. MHz	Corr. Factor dB	Reading Value dBuV		Emission Level dBuV		Limit dBuV		Margin dB	
		Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	0.11	44.68	25.98	44.79	26.09	66.00	56.00	-21.21	-29.91
0.199	0.11	53.22	43.89	53.33	44.00	63.67	53.67	-10.34	-9.67
0.252	0.11	45.97	30.05	46.08	30.16	61.69	51.69	-15.61	-21.53
0.614	0.12	44.91	30.57	45.03	30.69	56.00	46.00	-10.97	-15.31
1.043	0.14	38.59	26.83	38.73	26.97	56.00	46.00	-17.27	-19.03
27.562	0.77	35.98	29.95	36.75	30.72	60.00	50.00	-23.25	-19.28

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)