



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7**

CERTIFICATION TEST REPORT

FOR

2.4 GHZ SHORT RANGE RF MODULE

MODEL NUMBER: 1409

**FCC ID: C3K1409
IC: 3048A-1409**

REPORT NUMBER: 09U12932- 8, Revision A

ISSUE DATE: FEBRUARY 17, 2010

Prepared for
**MICROSOFT CORPORATION
1 MICROSOFT WAY
REDMOND, WA 98052, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	12/03/09	Initial Issue	F. Ibrahim
A	02/17/10	Revised radiated emissions data above 1 GHz, BE data, Worst-case configuration, EUT description, setup diagram and radiated emissions setup photos	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	6
5.6. <i>DESCRIPTION OF TEST SETUP</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. ANTENNA PORT TEST RESULTS	10
7.1. <i>20 dB AND 99% BANDWIDTH</i>	10
7.2. <i>HOPPING FREQUENCY SEPARATION</i>	14
7.3. <i>NUMBER OF HOPPING CHANNELS</i>	15
7.4. <i>AVERAGE TIME OF OCCUPANCY</i>	18
7.5. <i>OUTPUT POWER</i>	20
7.6. <i>AVERAGE POWER</i>	21
7.7. <i>CONDUCTED SPURIOUS EMISSIONS</i>	22
8. RADIATED TEST RESULTS	27
8.1. <i>LIMITS AND PROCEDURE</i>	27
8.2. <i>RADIO MODULE INSIDE ENCLOSURE</i>	28
8.2.1. <i>TRANSMITTER ABOVE 1 GHz</i>	28
8.2.2. <i>RECEIVER ABOVE 1 GHz</i>	37
8.3. <i>RADIO MODULE OUTSIDE ENCLOSURE</i>	38
8.3.1. <i>TRANSMITTER ABOVE 1 GHz</i>	38
8.3.2. <i>RECEIVER ABOVE 1 GHz</i>	47
8.3.3. <i>WORST-CASE BELOW 1 GHz</i>	48
9. AC POWER LINE CONDUCTED EMISSIONS	51
10. MAXIMUM PERMISSIBLE EXPOSURE	55

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MICROSOFT CORPORATION
1 MICROSOFT WAY
REDMOND, WA 98052, U.S.A.

EUT DESCRIPTION: 2.4 GHZ SHORT RANGE RF MODULE

MODEL: 1409

SERIAL NUMBER: X821258-006: EV3B ID295 (CONDUCTED UNITS)
X821258-006: EV3B IC282 (RADIATED UNITS)
Host: 906444F1150088600305 (RADIATED TEST ONLY)

DATE TESTED: NOVEMBER 17 - DECEMBER 01, 2009
FEBRUARY 11-12, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



MENGISTU MEKURIA
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a 2.4 GHz Short Range RF frequency hopping transceiver Module.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Output Power (dBm)	Output Power (mW)
2402 - 2482	4.72	2.96

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Patch Antenna that soldered to the printed circuit board. The antenna has a maximum gain of 5.0 dBi

5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was WirelessDeviceTest v1.1.2. The driver used during the test is version 4.15

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2402 MHz.

The EUT is a desktop device. All radiated tests were conducted based on the normal or natural orientation of the EUT.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
NoteBook	DELL	PP10S	CN-0C8862-48643-57L-1789
AC Adaptor	DELL	N5825	CN-0N5825-48661-575-A028
NoteBook	DELL	D620	(01)7898349890528
AC Adaptor	DELL	LA65NS0-00	CN-0DF263-71615-72M-2925
Level Converter with USB	MICROSOFT	N/A	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	0.9 m	N/A
2	DC	1	DC	Un-shielded	1.8m	N/A
4	USB	1	USB	Un-shielded	0.6m	N/A

TEST SETUP

The EUT was tested as stand-alone unit.

SETUP DIAGRAM FOR EMISSION TESTS

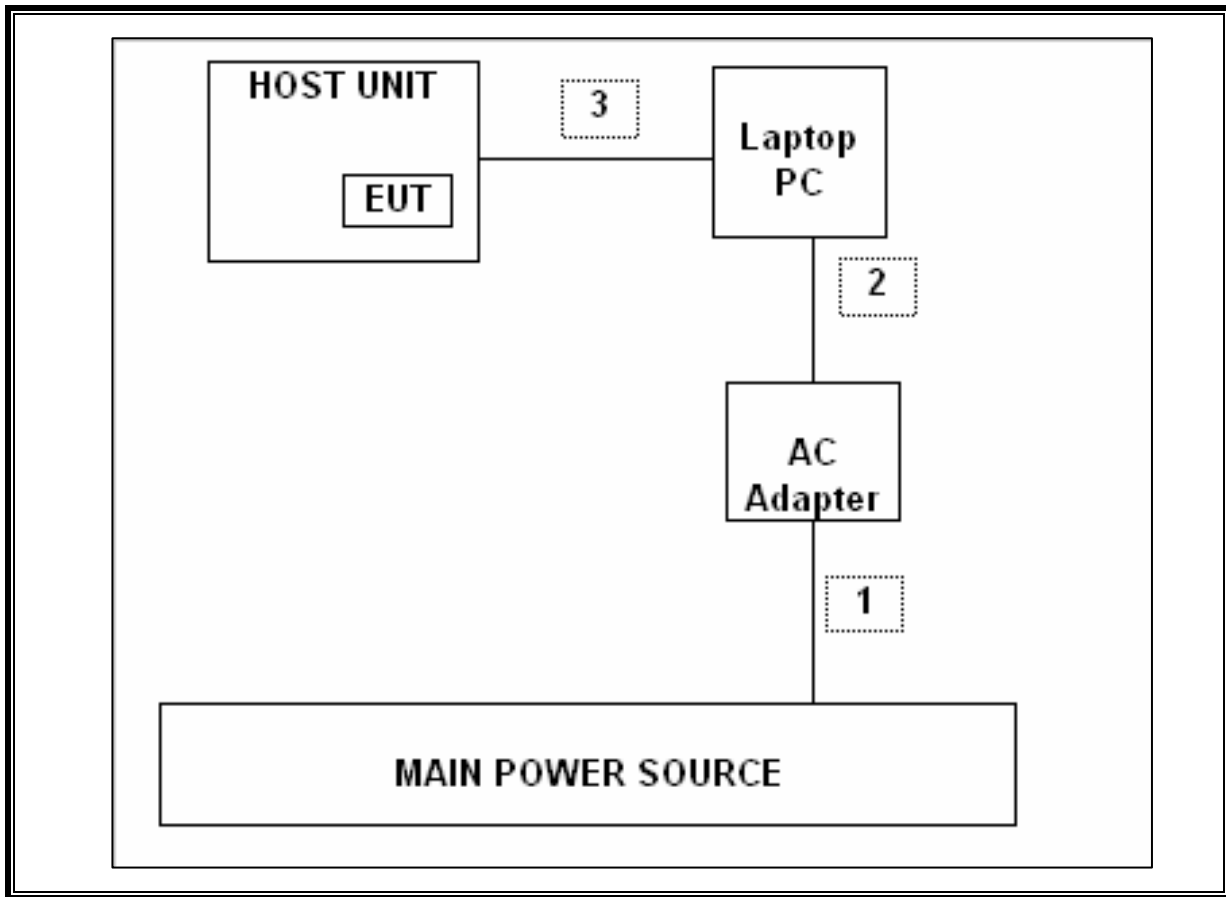

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01176	8/24/2010
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/31/10
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01161	12/09/10
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	8/24/2010
Antenna, Horn, 18 GHz	EMCO	3115	C00945	07/29/10
Antenna, Horn, 18 GHz	EMCO	3115	C00872	07/29/10
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	7/14/2010
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	7/14/2010
Peak Power Sensor	Boonton	57318	N/A	02/02/10
Peak Power Meter	Boonton	4541	C01186	01/19/10
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	08/04/10
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	08/04/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	7/6/2010
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/6/2010
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	5/6/2011
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR

7. ANTENNA PORT TEST RESULTS

7.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.4000	1.3336
Middle	2442	1.4000	1.3338
High	2482	1.3990	1.3357



20 dB BANDWIDTH

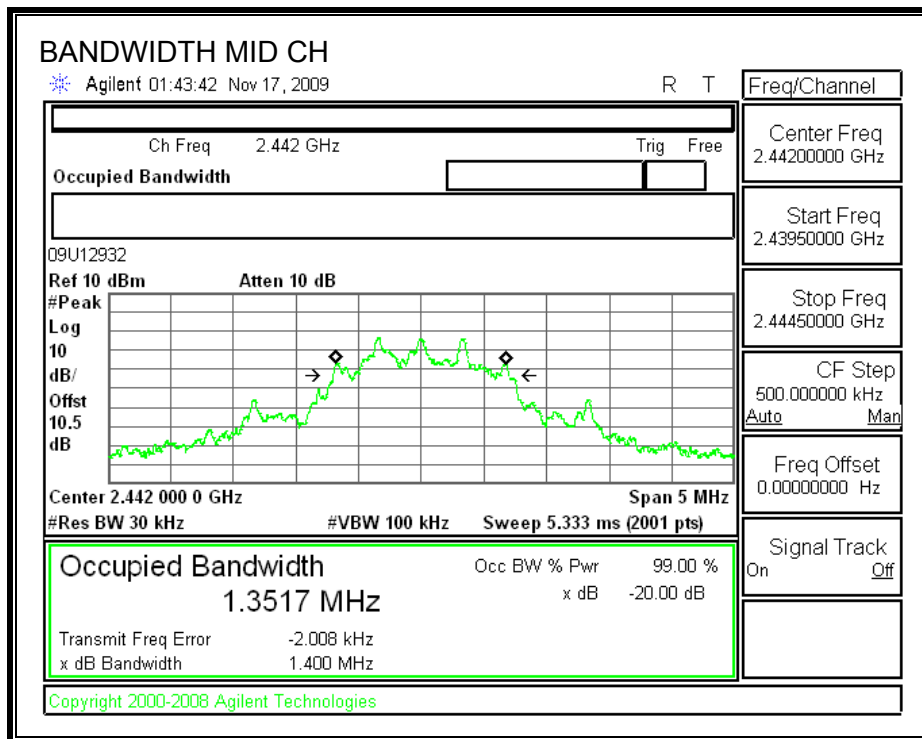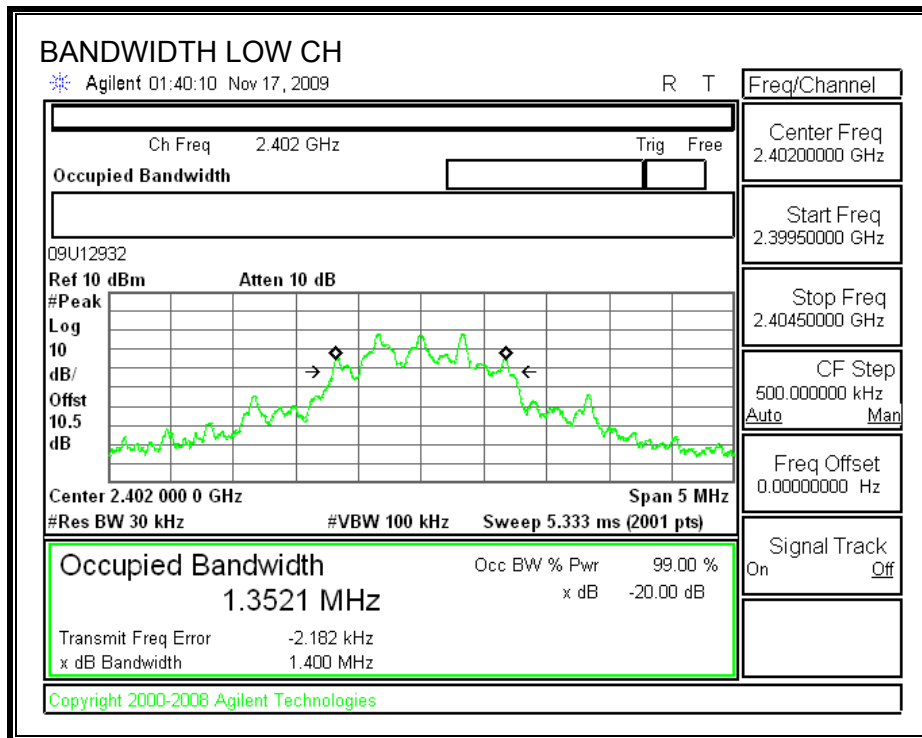

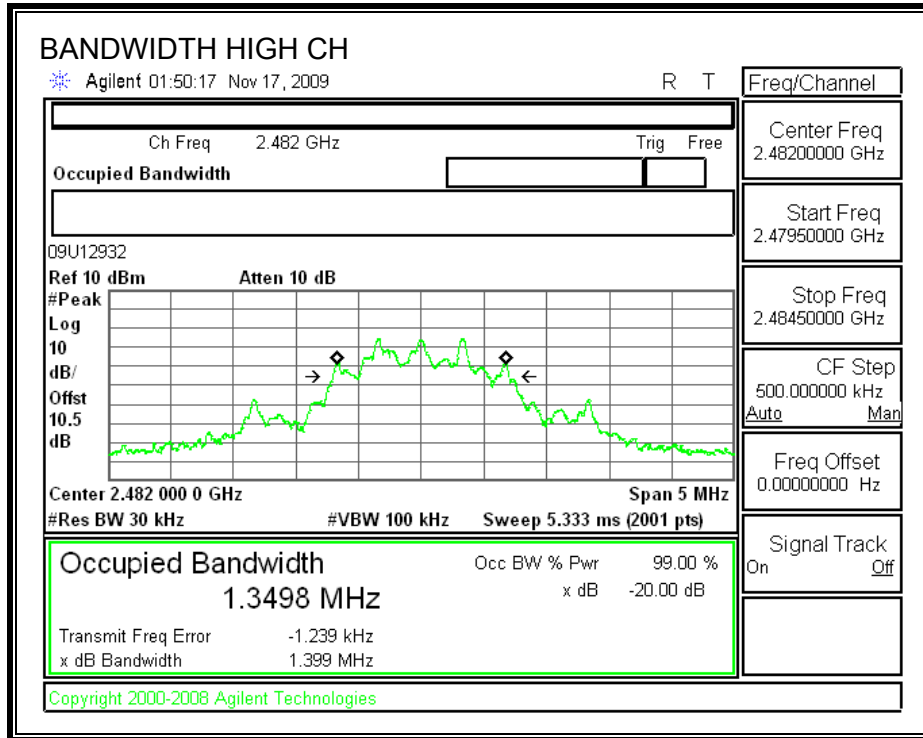

99% BANDWIDTH

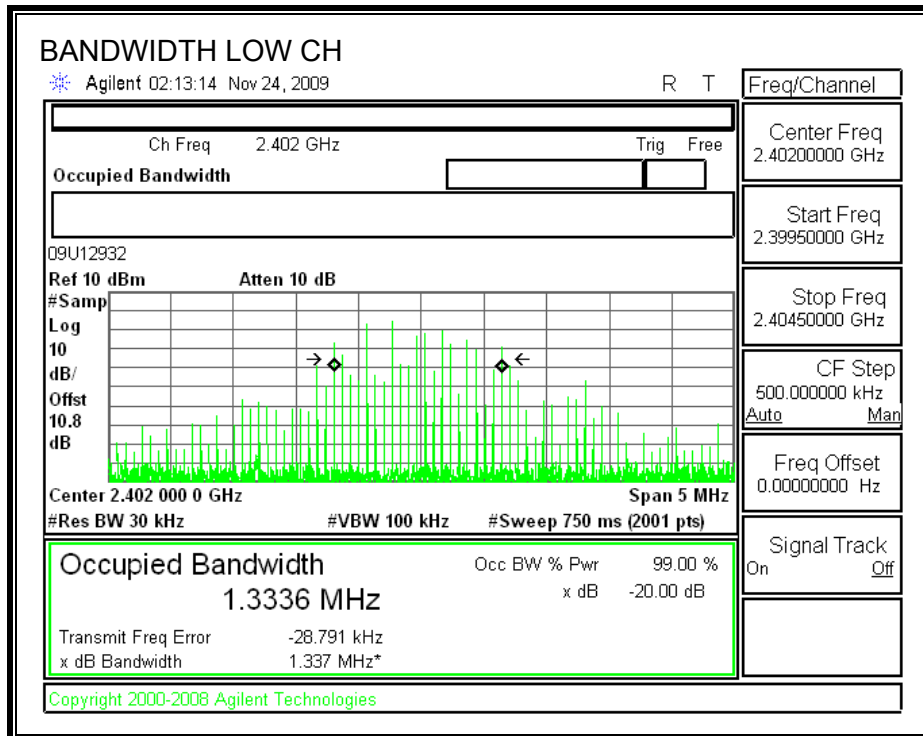

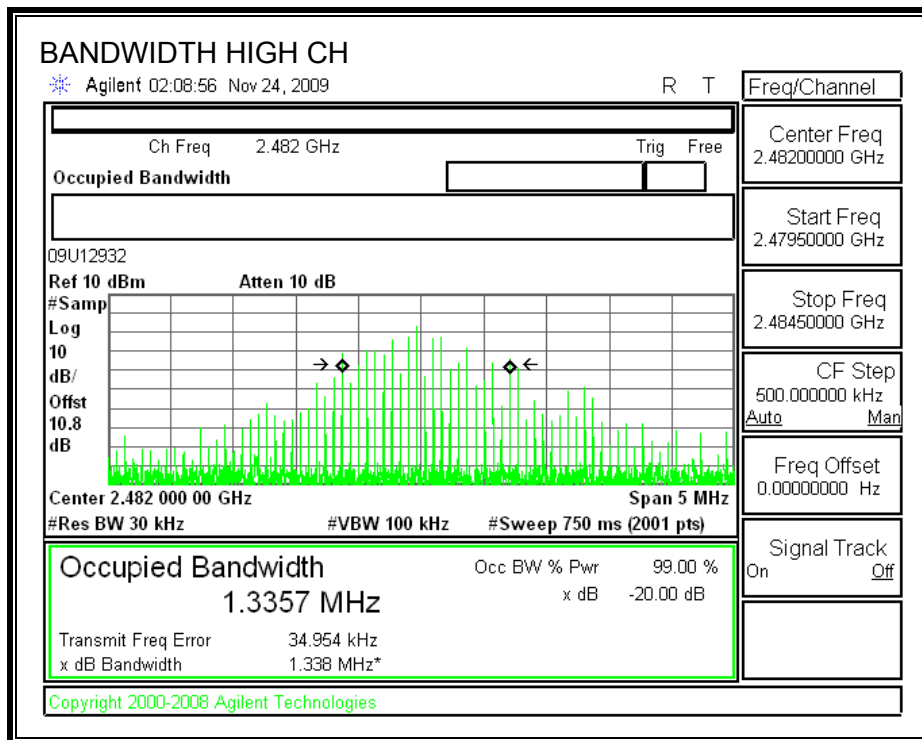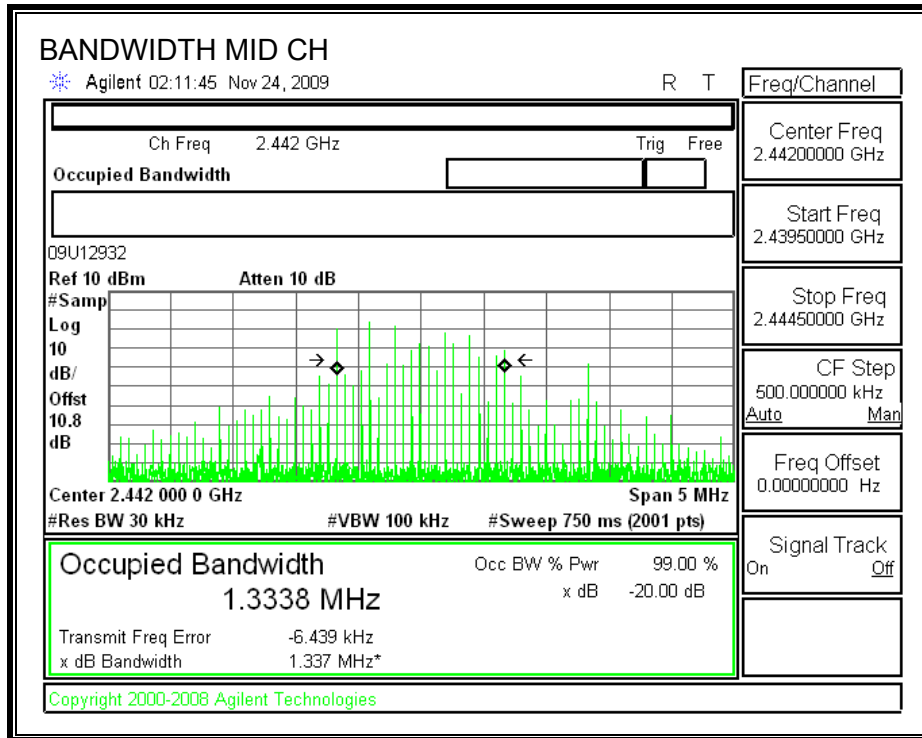

7.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

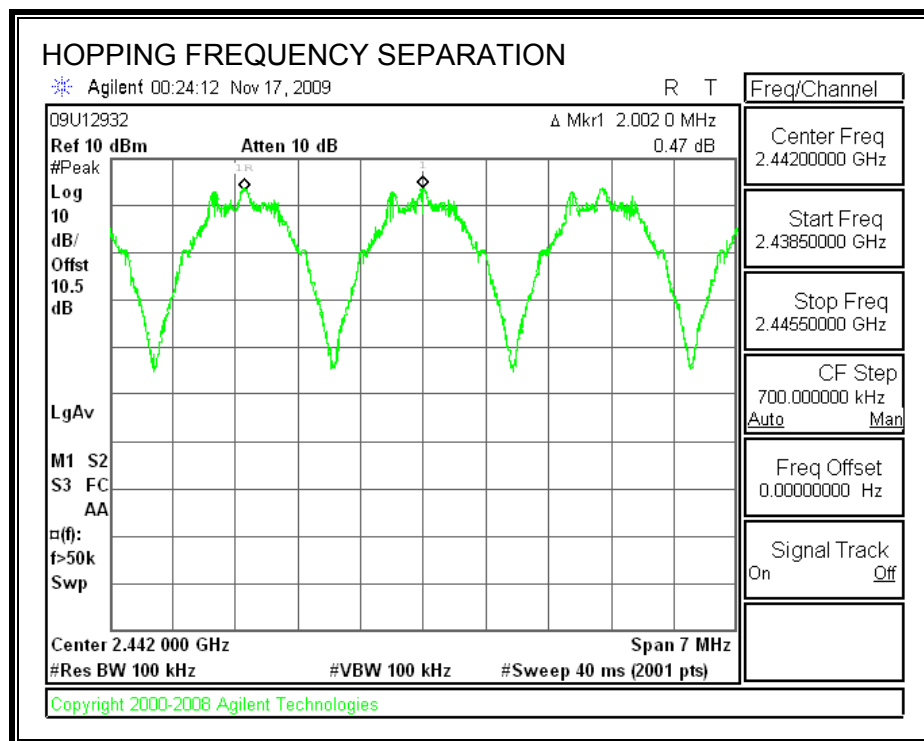

7.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Total of number of hopping channel = 41.

NUMBER OF HOPPING CHANNELS

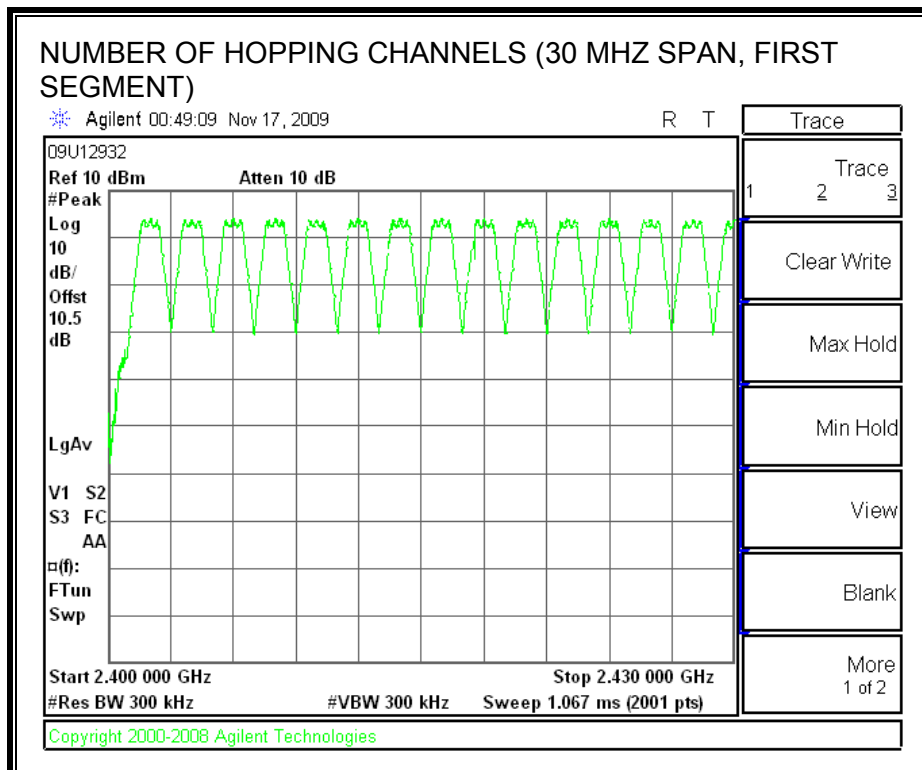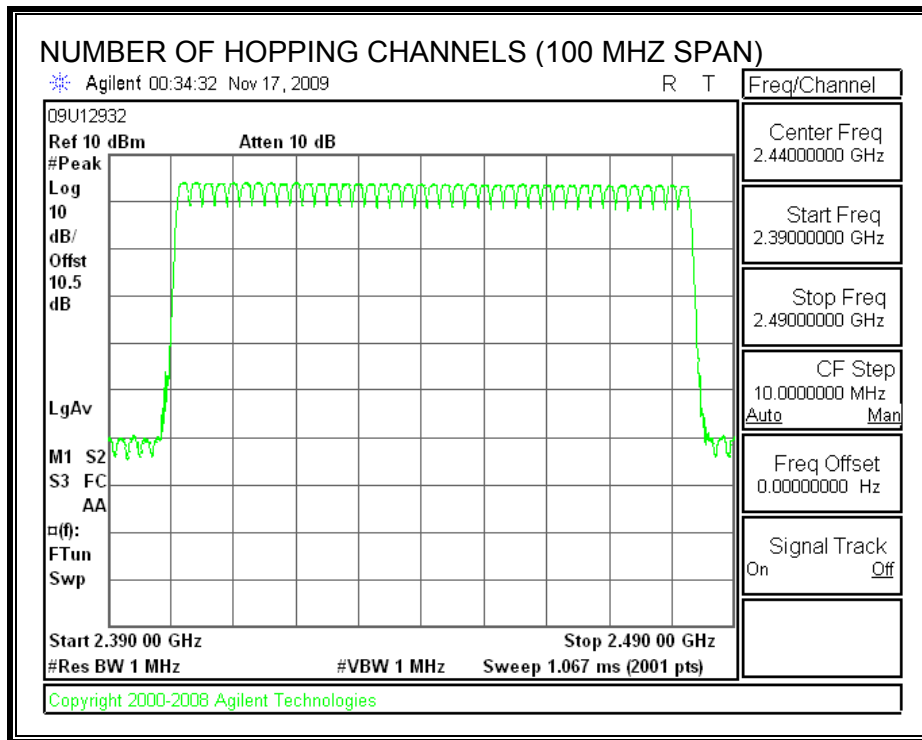

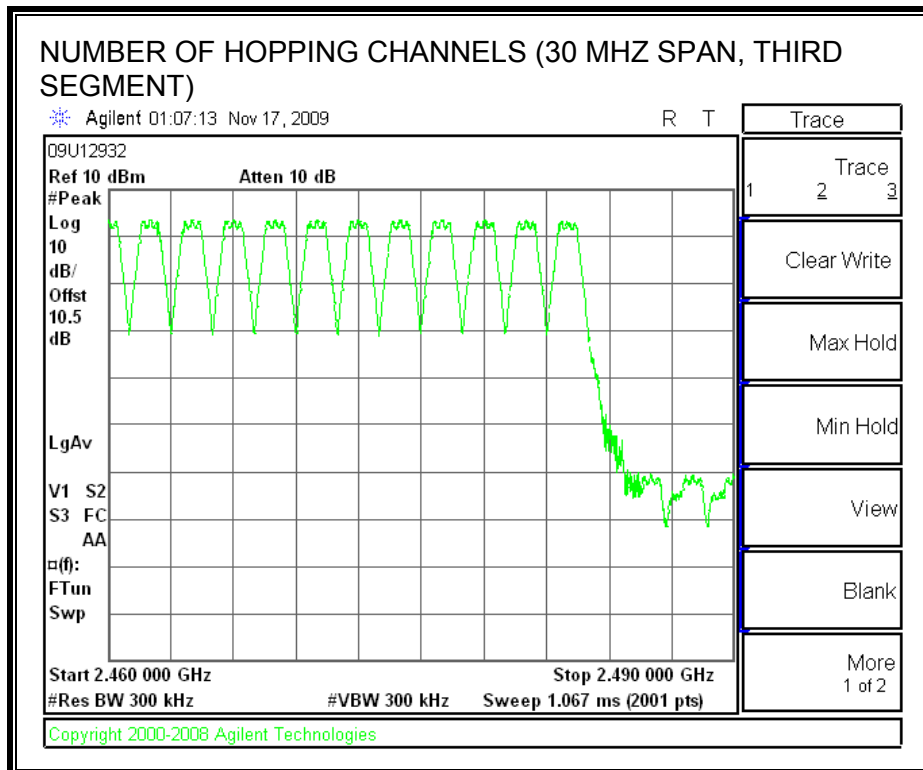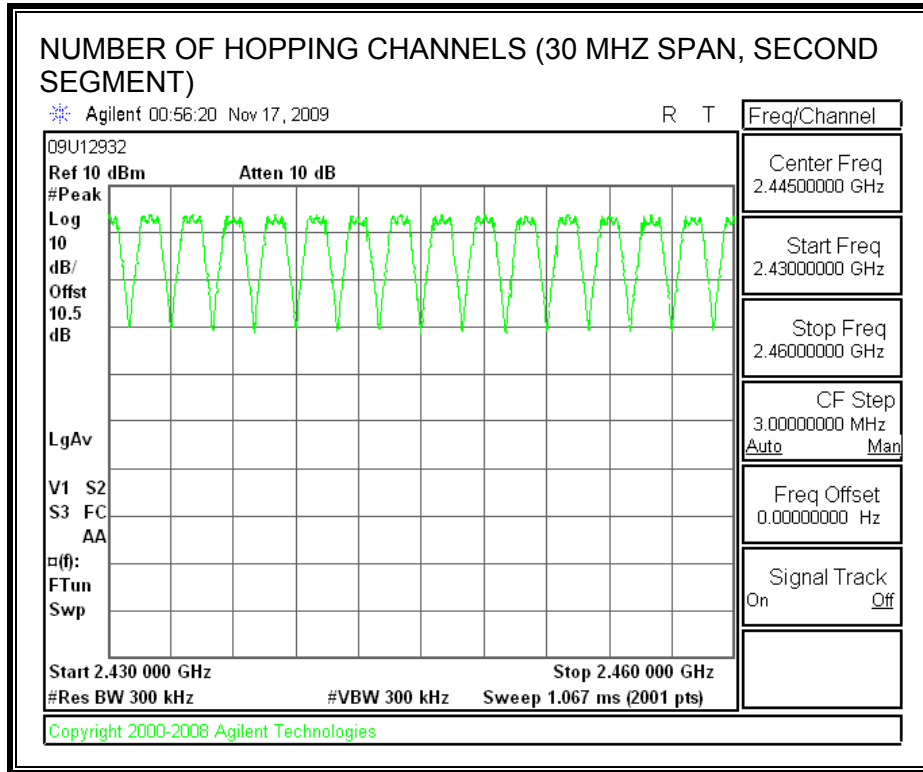

7.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 1.64 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 16.4 second period (41 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 1.64 \text{ s}) * \text{ pulse width}$.

RESULTS


Time Of Occupancy = $10 * 28 \text{ pulses} * 0.38 \text{ msec} = 0.10640 \text{ Seconds}$

Pulse Width (msec)	Number of Pulses in 1.64 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
0.3800	28	0.10640	0.4	0.294

PULSE WIDTH

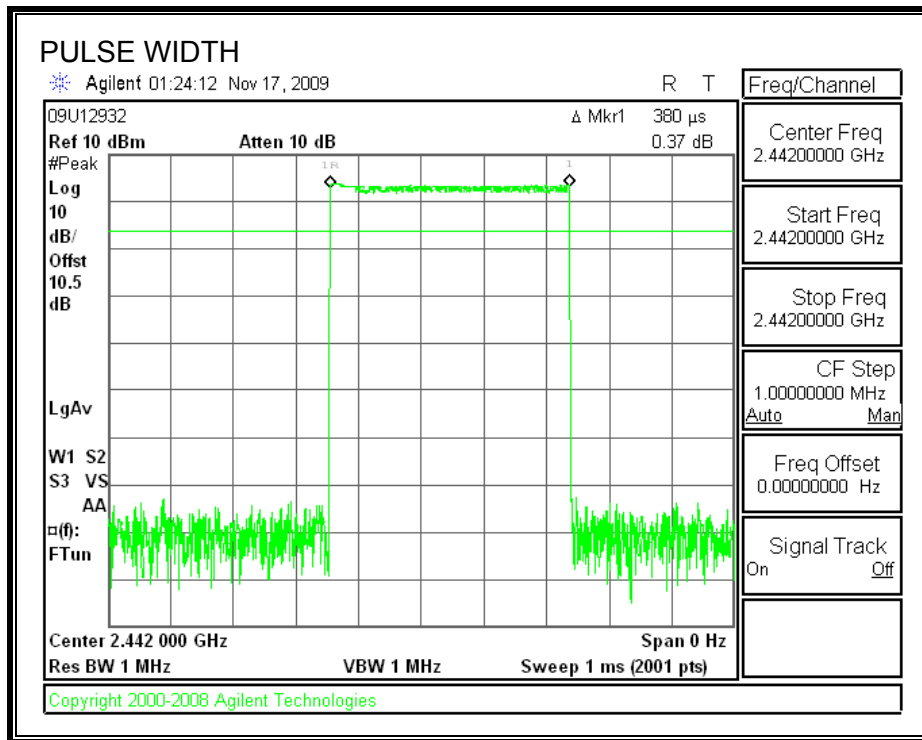

NUMBER OF PULSES IN 1.64 SECOND OBSERVATION PERIOD

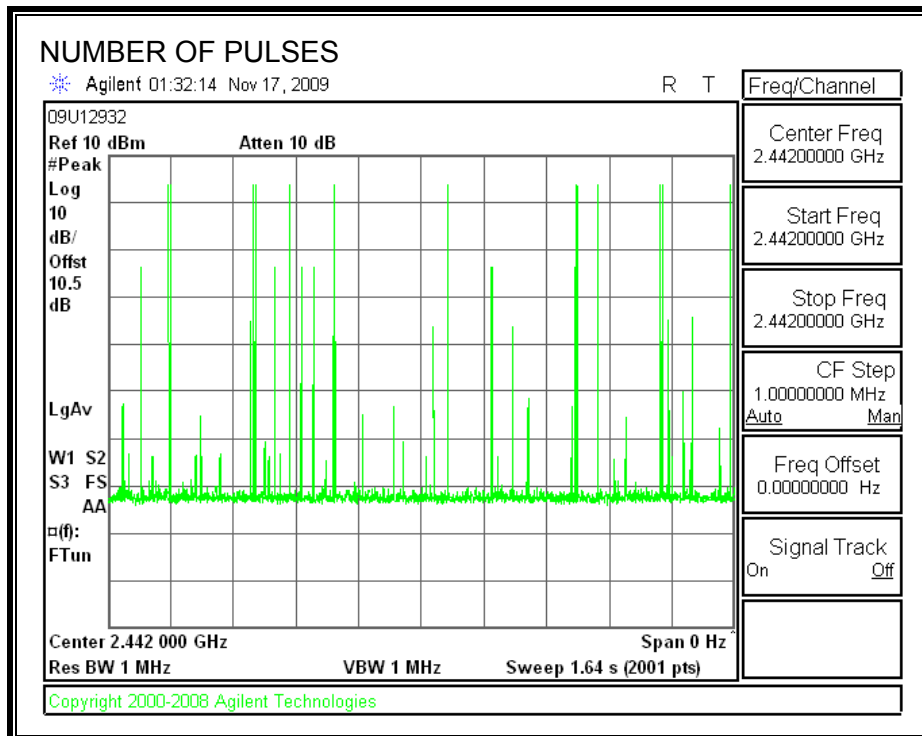

7.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a peak power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	4.72	21	-16.25
Middle	2442	4.45	21	-16.52
High	2482	4.08	21	-16.89

7.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.8 dB (including 10 dB pad and 0.8 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	4.21
Middle	2442	3.92
High	2482	3.53

7.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

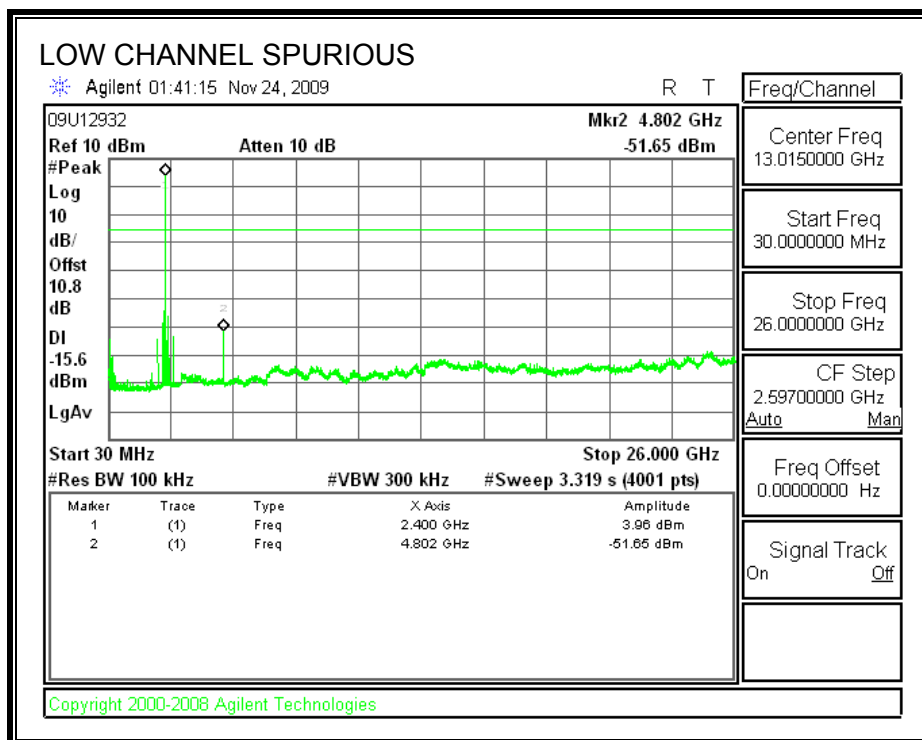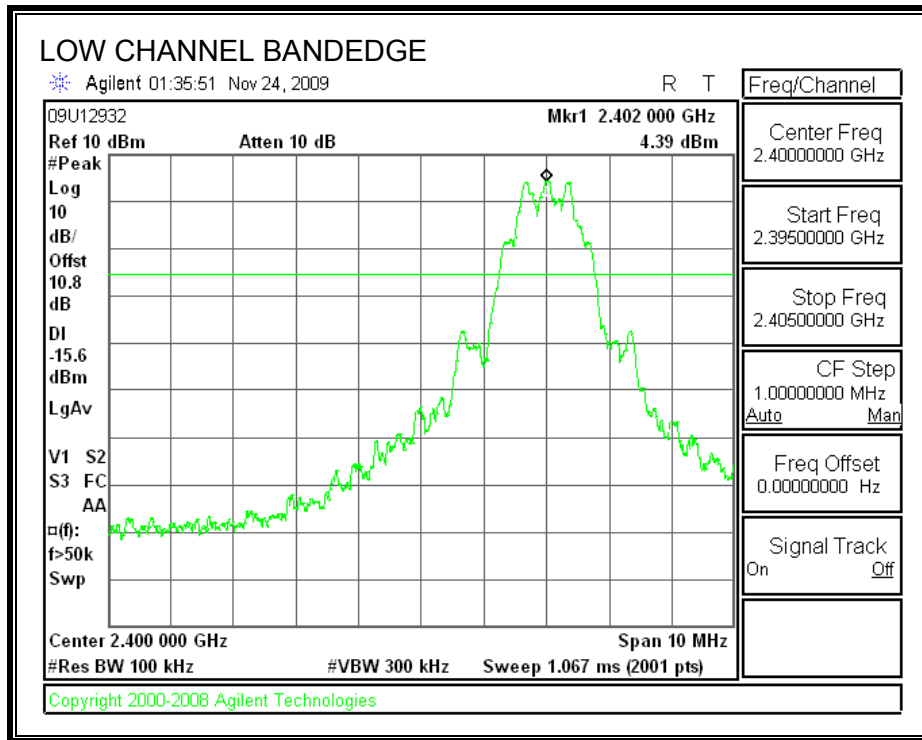



SPURIOUS EMISSIONS, MID CHANNEL

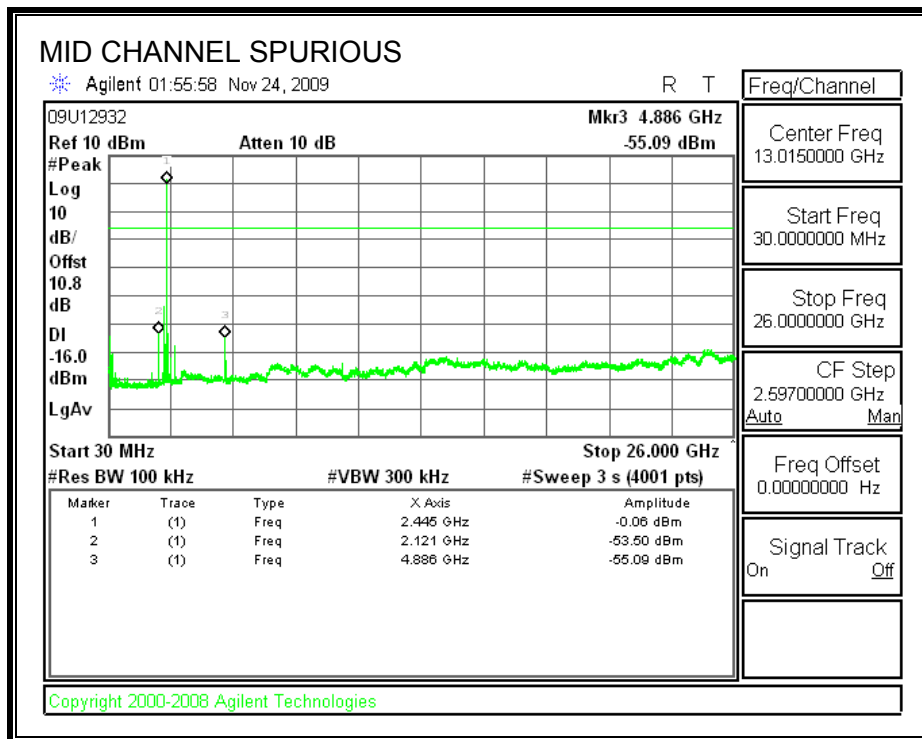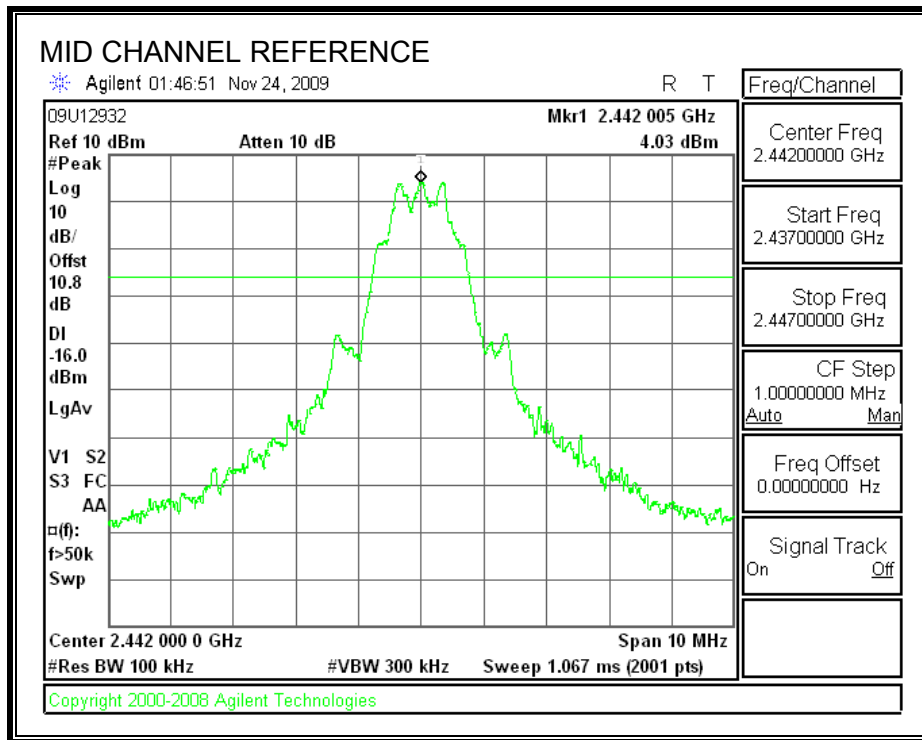

SPURIOUS EMISSIONS, HIGH CHANNEL

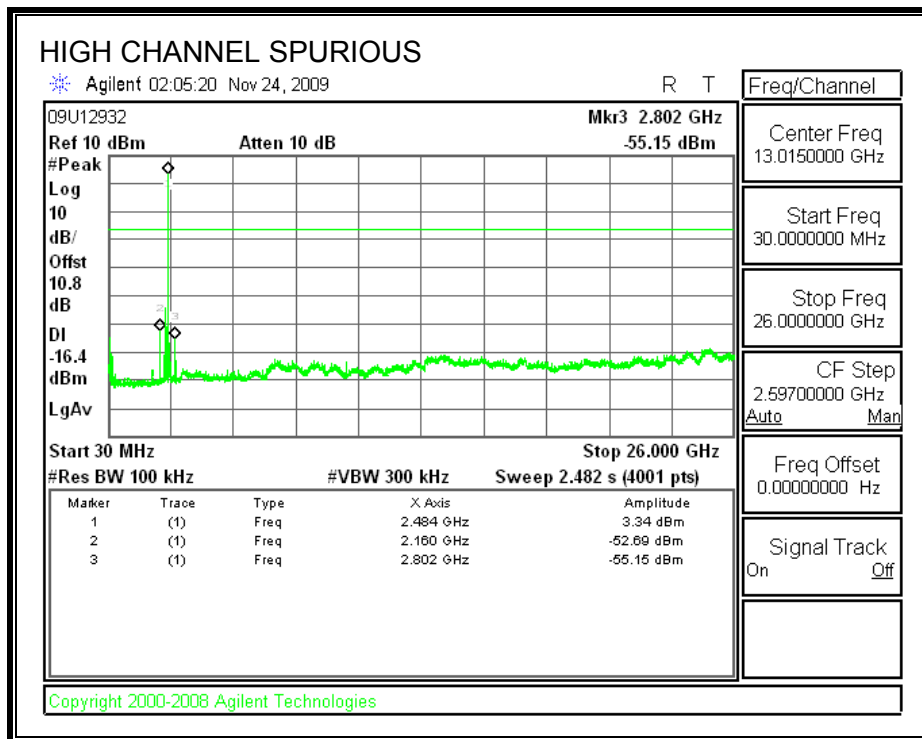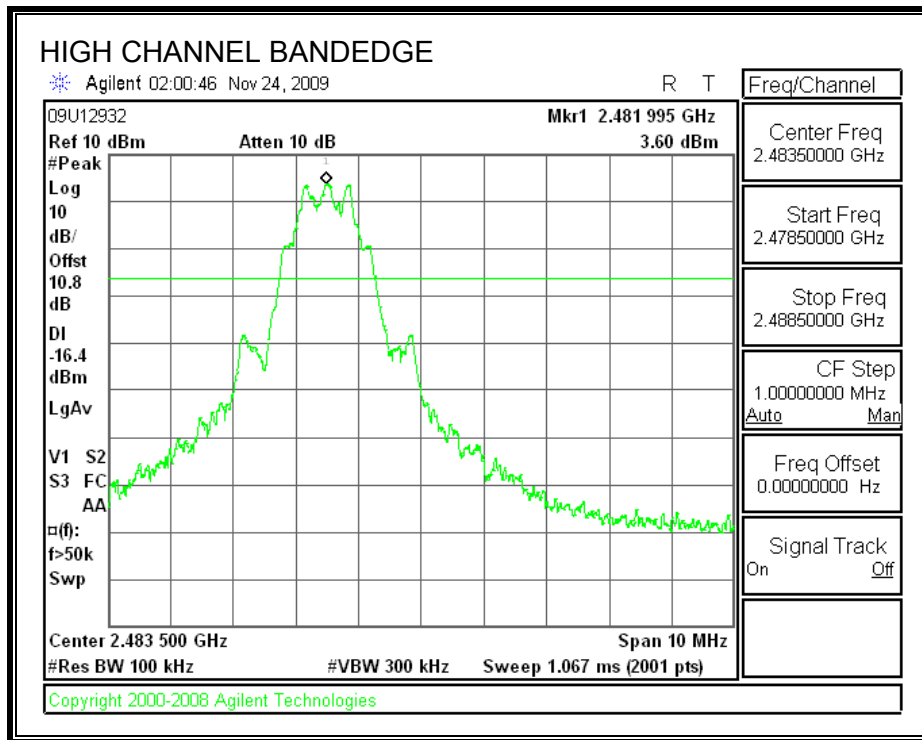

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

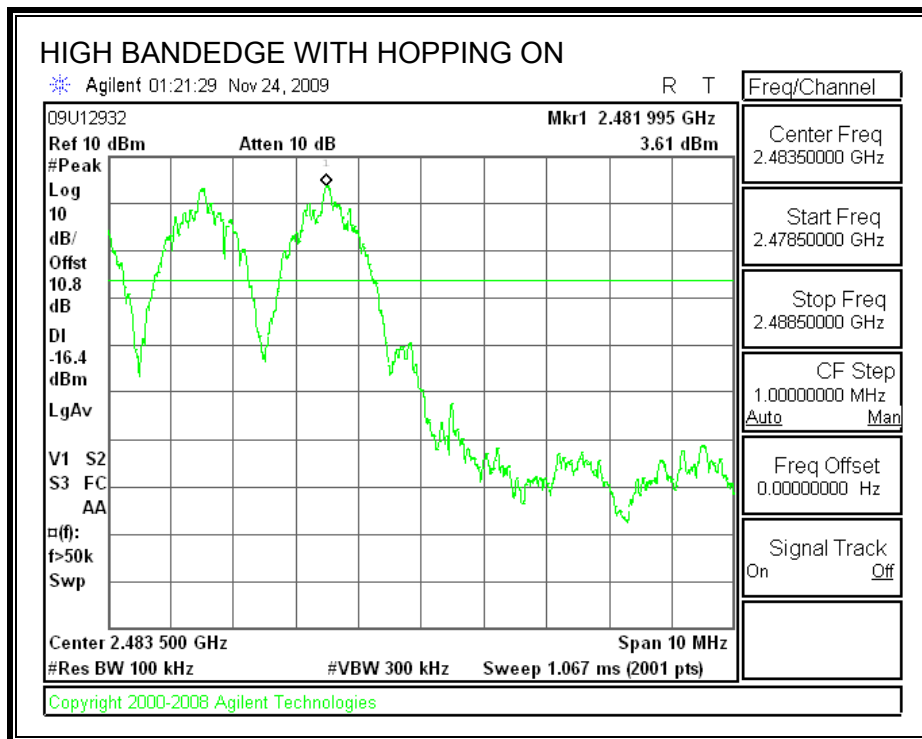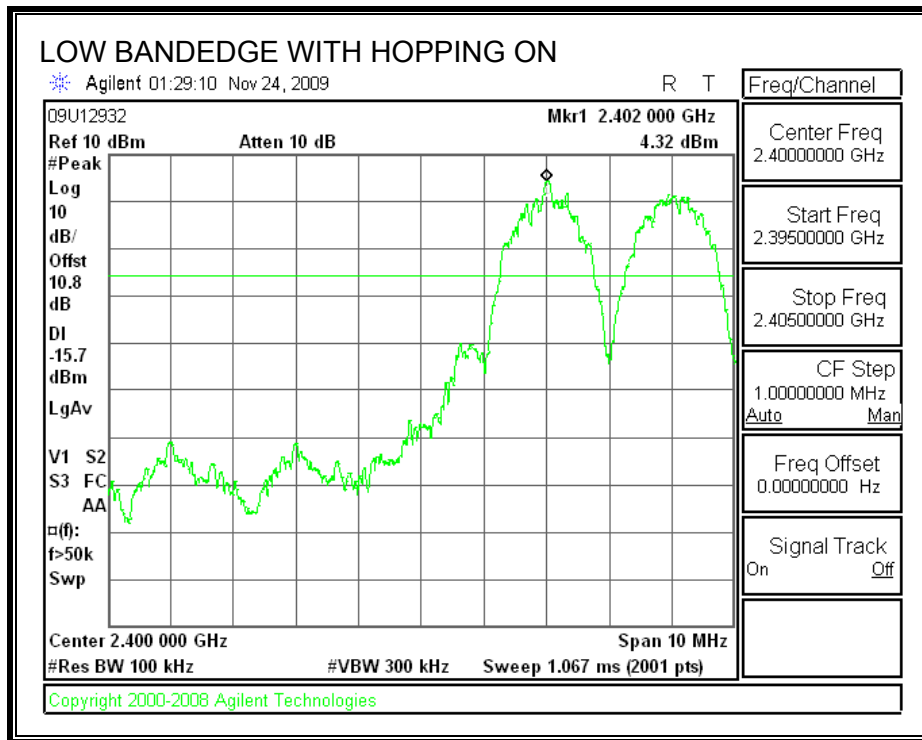

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. RADIO MODULE INSIDE ENCLOSURE



8.2.1. TRANSMITTER ABOVE 1 GHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

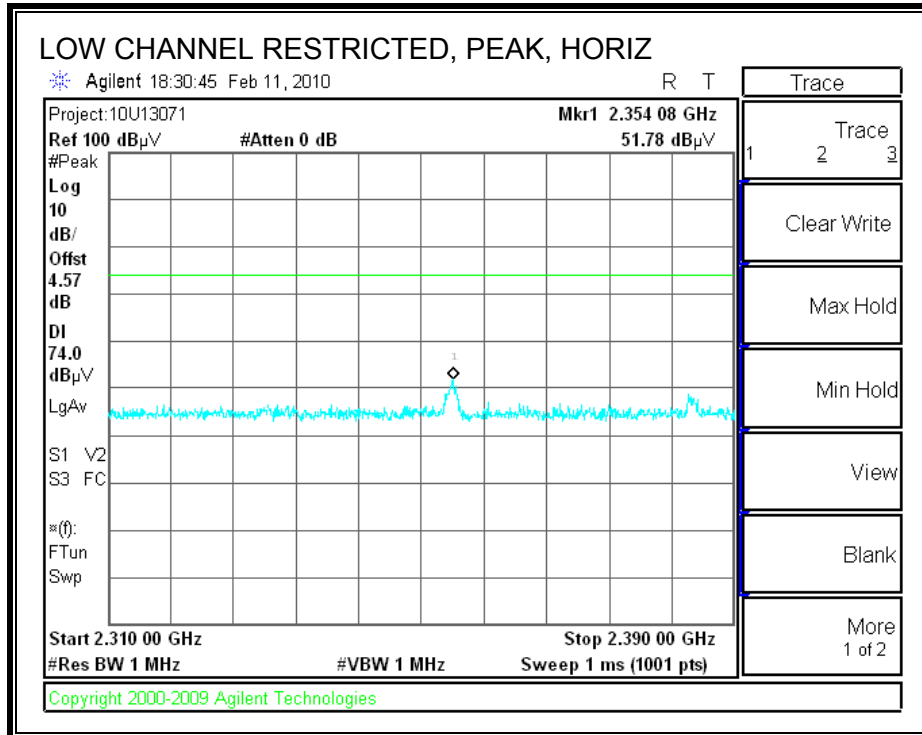

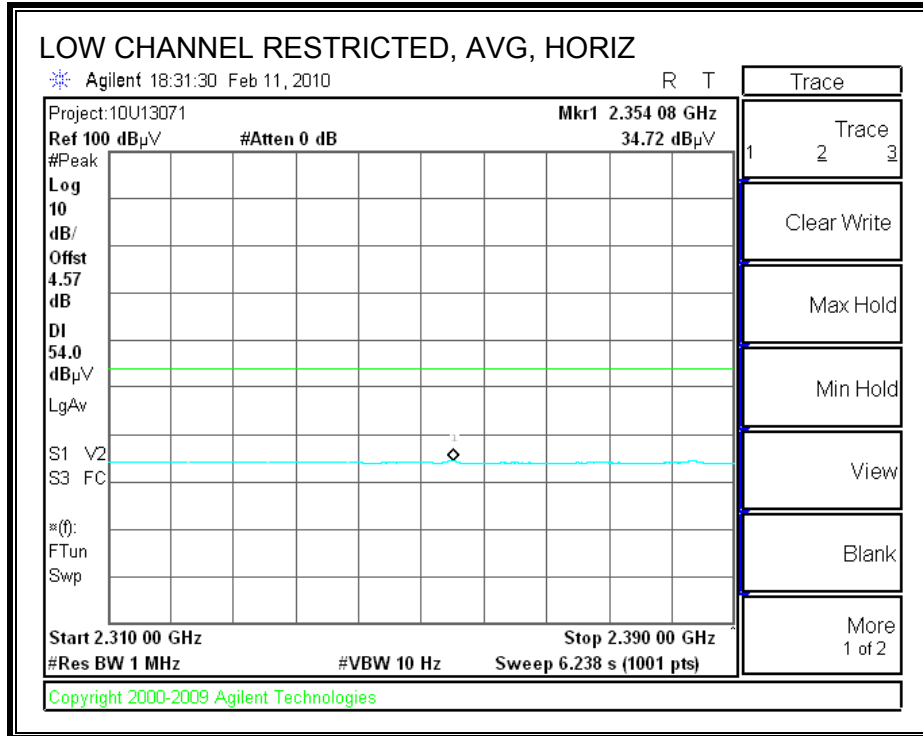



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

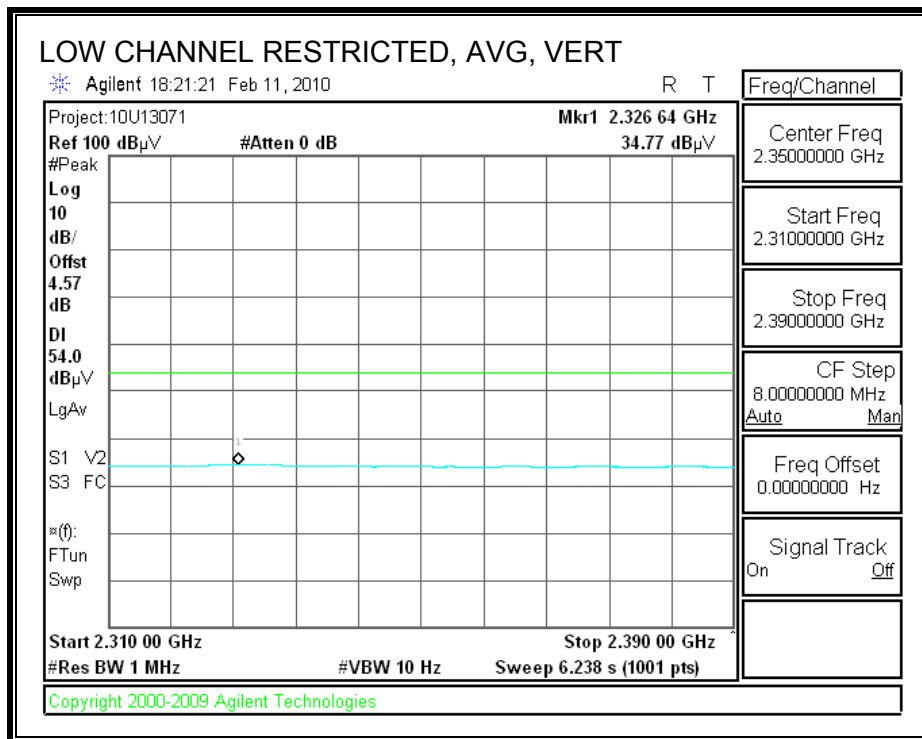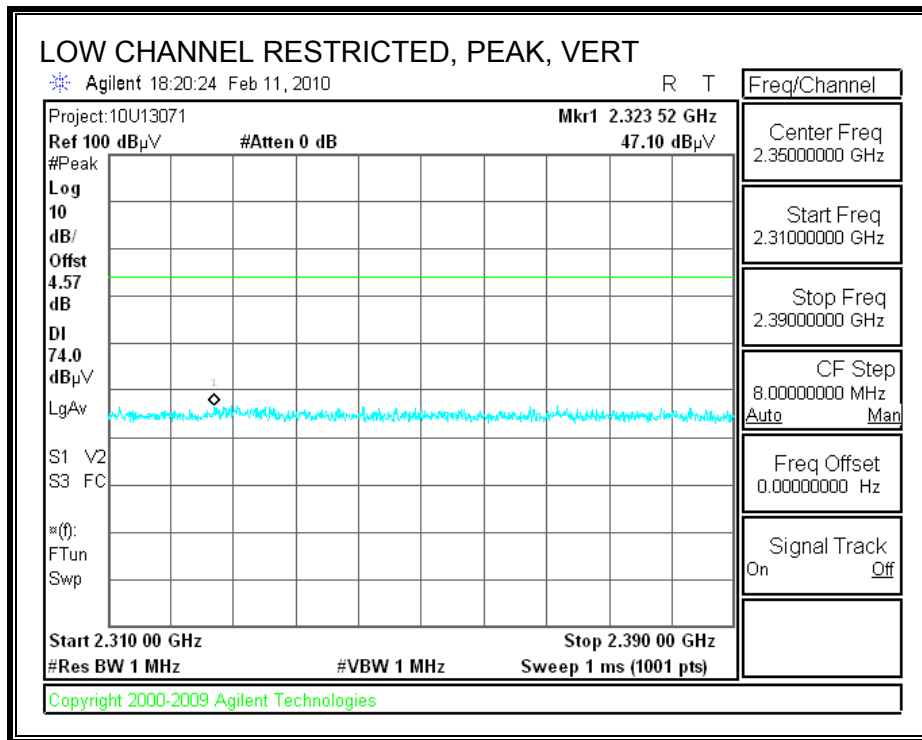


RESTRICTED BANDEDGE (HIGH CHANNEL, MARKER DELTA)



Tabular Results:


Freq (MHz)	Polarization	Detector	Reading (dBuV/m)	Delta Applied (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.5	H	PK	99.25	45.41	53.84	74	-20.16
2483.5	H	AV	37.44	45.41	-7.97	54	-61.97
2483.5	V	PK	103.35	44.62	58.73	74	-15.27
2483.5	V	AV	37.68	44.62	-6.94	54	-60.94

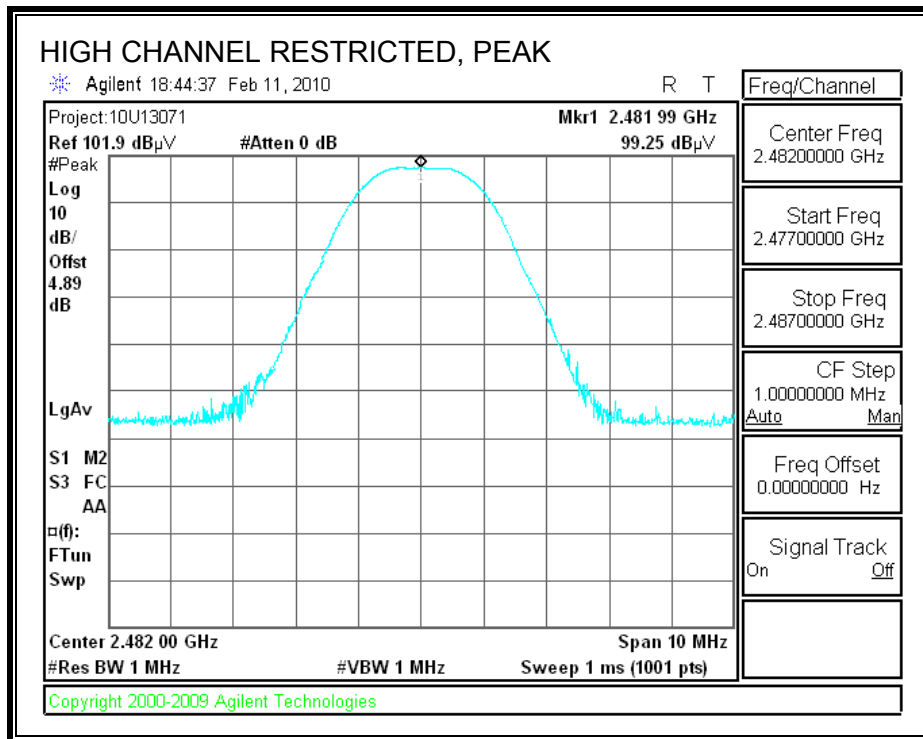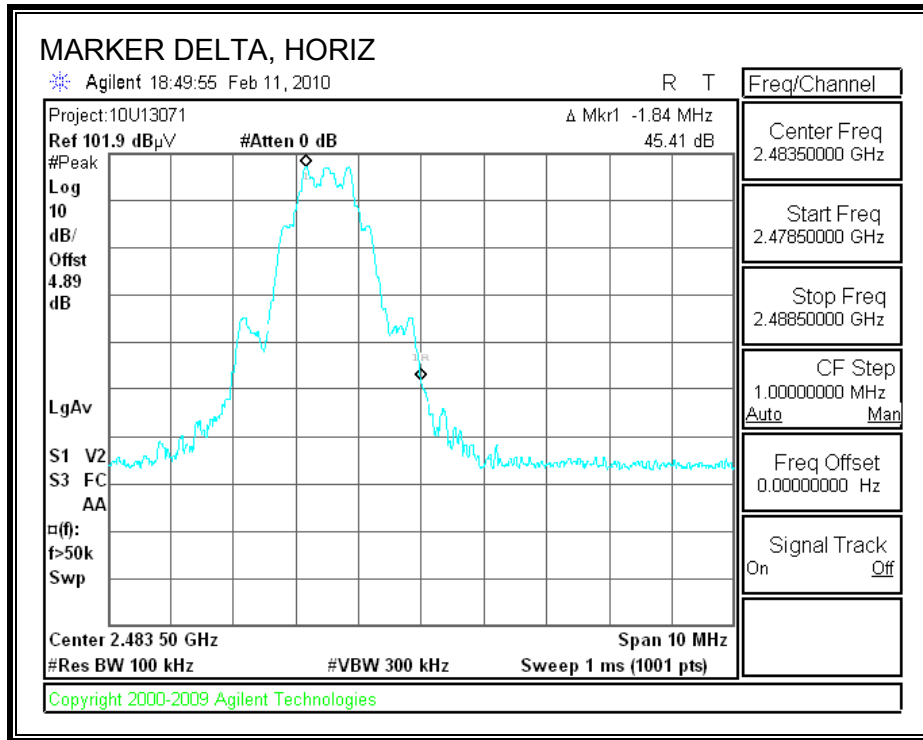

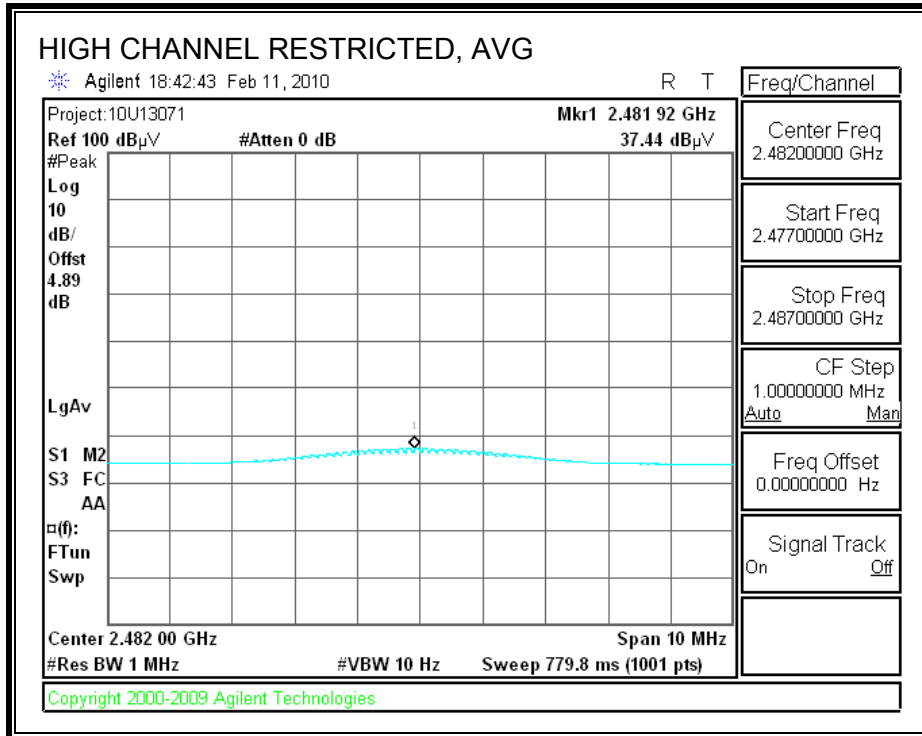

RESTRICTED BANDEDGE (HIGH CHANNEL, MARKER DELTA)

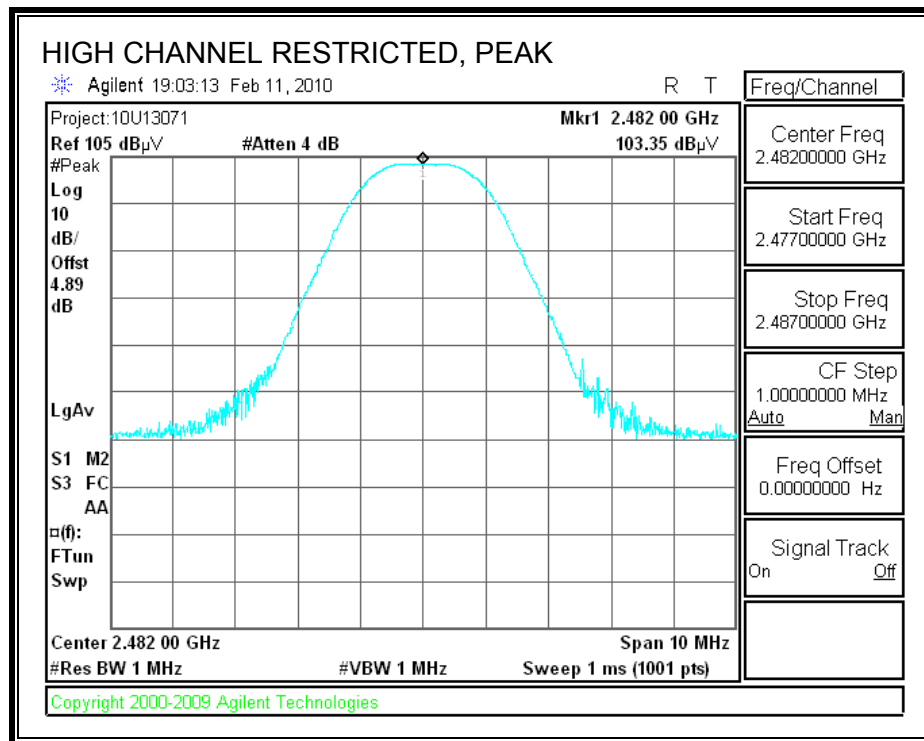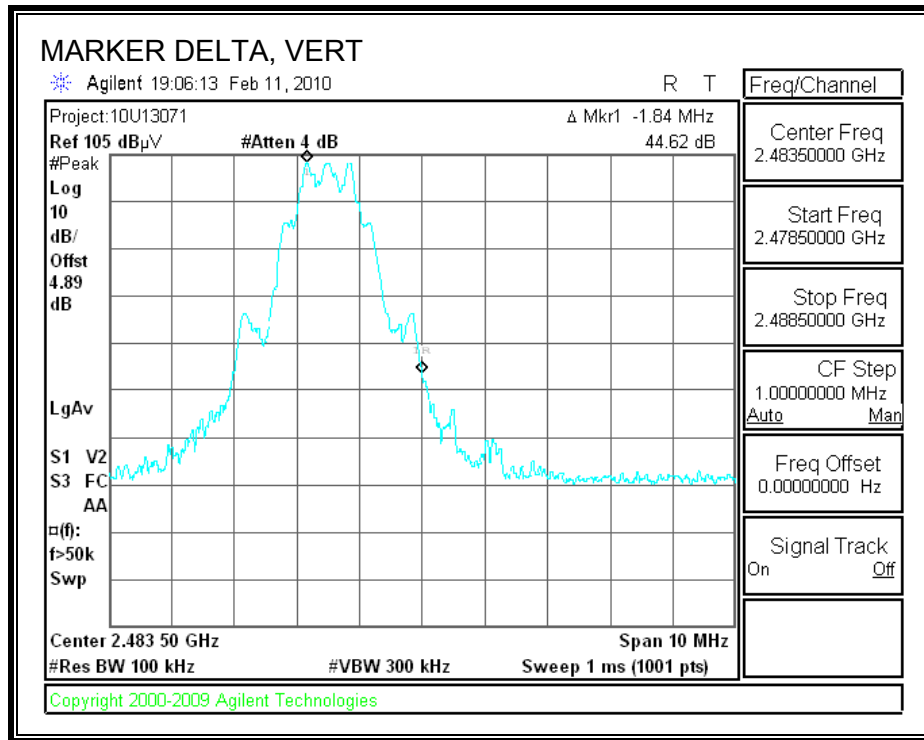

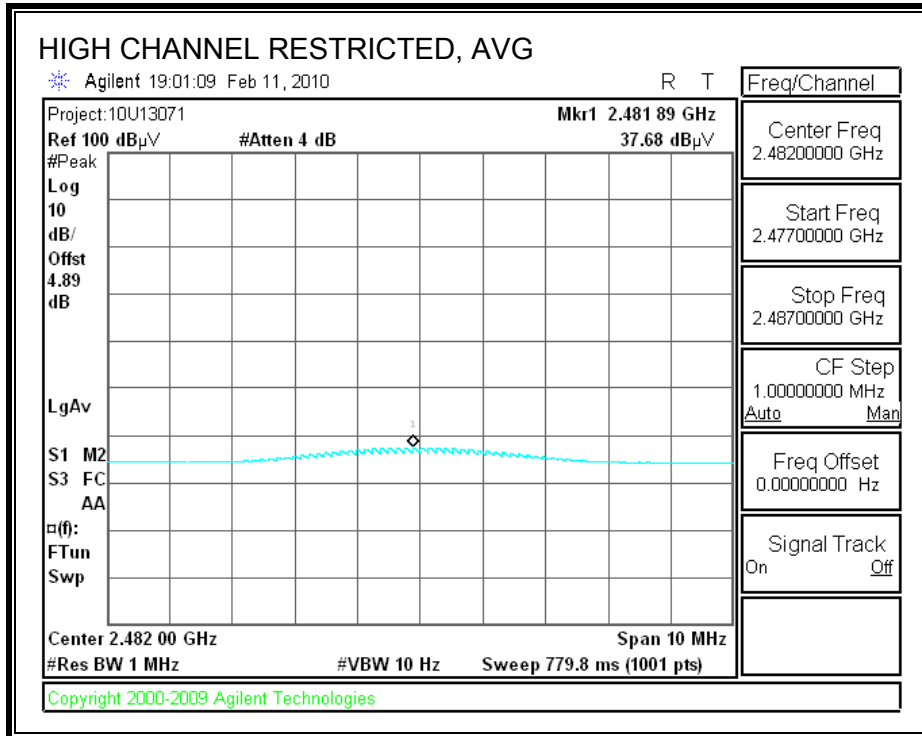

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Company: MICROSOFT CORPORATIONS
 Project #: 10U13071
 Date: 2/11/2010
 Test Engineer: MENGISTU MEKURIA
 Configuration: EUT INSIDE HOST AND POWERED FROM THE LAPTOP
 Mode: TX MODE

Test Equipment:

Horn 1-18GHz T73; S/N: 6717 @3m	Pre-amplifer 1-26GHz T144 Miteq 3008A00931	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit FCC 15.209
------------------------------------	---	-----------------------	--------------	---------------------

Hi Frequency Cables

3' cable 22807700 3' cable 22807700	12' cable 22807600 12' cable 22807600	20' cable 22807500 20' cable 22807500	HPF	Reject Filter R_001	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz
--	--	--	-----	------------------------	---

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2402 MHz)															
1.225	3.0	57.3	41.1	24.6	2.6	-39.2	0.0	0.0	45.4	29.1	74	54	-28.6	-24.9	V
1.450	3.0	56.4	39.4	25.4	2.9	-38.8	0.0	0.0	45.8	28.8	74	54	-28.2	-25.2	V
1.665	3.0	57.9	34.9	26.1	3.1	-38.5	0.0	0.0	48.6	25.5	74	54	-25.4	-28.5	V
1.990	3.0	53.8	40.0	27.2	3.4	-38.1	0.0	0.0	46.4	32.6	74	54	-27.6	-21.4	V
4.985	3.0	44.5	27.2	33.2	5.9	-36.5	0.0	0.0	47.1	29.9	74	54	-26.9	-24.1	V
1.265	3.0	53.3	35.3	24.7	2.7	-39.1	0.0	0.0	41.6	23.6	74	54	-32.4	-30.4	H
1.450	3.0	57.8	40.0	25.4	2.9	-38.8	0.0	0.0	47.2	29.4	74	54	-26.8	-24.6	H
1.575	3.0	59.4	34.0	25.8	3.0	-38.7	0.0	0.0	49.5	24.1	74	54	-24.5	-29.9	H
Mid Channel (2442 MHz)															
1.225	3.0	57.5	41.0	24.6	2.6	-39.2	0.0	0.0	45.5	29.0	74	54	-28.5	-25.0	V
1.450	3.0	56.1	39.2	25.4	2.9	-38.8	0.0	0.0	45.5	28.6	74	54	-28.5	-25.4	V
1.665	3.0	57.0	34.9	26.1	3.1	-38.5	0.0	0.0	47.6	25.6	74	54	-26.4	-28.4	V
1.990	3.0	55.6	39.6	27.2	3.4	-38.1	0.0	0.0	48.2	32.1	74	54	-25.8	-21.9	V
4.985	3.0	44.0	27.5	33.2	5.9	-36.5	0.0	0.0	46.7	30.2	74	54	-27.3	-23.8	V
1.265	3.0	52.4	36.0	24.7	2.7	-39.1	0.0	0.0	40.7	24.3	74	54	-33.3	-29.7	H
1.450	3.0	58.5	39.9	25.4	2.9	-38.8	0.0	0.0	47.9	29.3	74	54	-26.1	-24.7	H
1.665	3.0	60.6	34.1	26.1	3.1	-38.5	0.0	0.0	51.3	24.7	74	54	-22.7	-29.3	H
Hi Channel (2482 MHz)															
1.560	3.0	56.7	41.5	25.7	3.0	-38.7	0.0	0.0	46.7	31.6	74	54	-27.3	-22.4	V
1.665	3.0	56.7	38.5	26.1	3.1	-38.5	0.0	0.0	47.3	29.2	74	54	-26.7	-24.8	V
1.990	3.0	54.5	39.1	27.2	3.4	-38.1	0.0	0.0	47.1	31.7	74	54	-26.9	-22.3	V
4.985	3.0	44.1	27.3	33.2	5.9	-36.5	0.0	0.0	46.8	29.9	74	54	-27.2	-24.1	V
1.265	3.0	52.5	34.9	24.7	2.7	-39.1	0.0	0.0	40.8	23.2	74	54	-33.2	-30.8	H
1.450	3.0	58.2	39.7	25.4	2.9	-38.8	0.0	0.0	47.6	29.1	74	54	-26.4	-24.9	H
1.665	3.0	61.8	34.4	26.1	3.1	-38.5	0.0	0.0	52.5	25.0	74	54	-21.5	-29.0	H

Rev. 07.22.09

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.2.2. RECEIVER ABOVE 1 GHz

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Company: MICROSOFT CORPORATIONS
 Project #: 10U13071
 Date: 2/11/2010
 Test Engineer: MENGISTU MEKURIA
 Configuration: EUT INSIDE HOST AND POWERED FROM THE LAPTOP
 Mode: RX MODE

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T144 Miteq 3008A00931			FCC 15.209

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Mid Channel (2442 MHz)															
1.225	3.0	58.7	40.6	24.6	2.6	-39.2	0.0	0.0	46.8	28.6	74	54	-27.2	-25.4	V
1.450	3.0	57.7	39.5	25.4	2.9	-38.8	0.0	0.0	47.1	28.9	74	54	-26.9	-25.1	V
1.665	3.0	70.6	34.9	26.1	3.1	-38.5	0.0	0.0	61.2	25.6	74	54	-12.8	-28.4	Y
1.450	3.0	58.9	39.8	25.4	2.9	-38.8	0.0	0.0	48.3	29.2	74	54	-25.7	-24.8	H
1.660	3.0	68.6	34.6	26.1	3.1	-38.5	0.0	0.0	59.2	25.2	74	54	-14.8	-28.8	H


Rev. 07.22.09


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.3. RADIO MODULE OUTSIDE ENCLOSURE



8.3.1. TRANSMITTER ABOVE 1 GHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

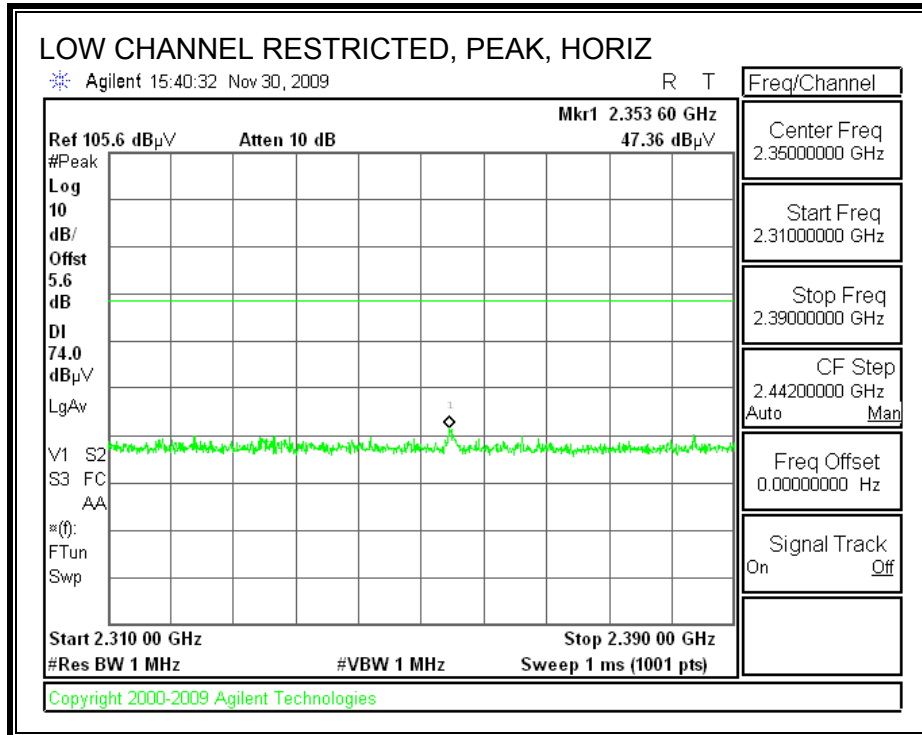

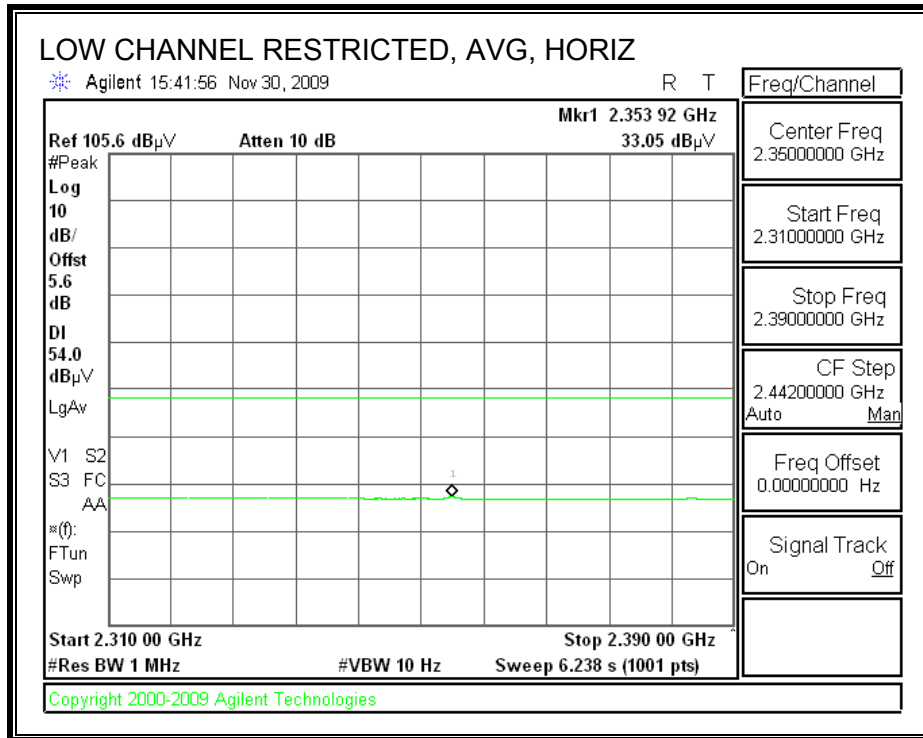



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

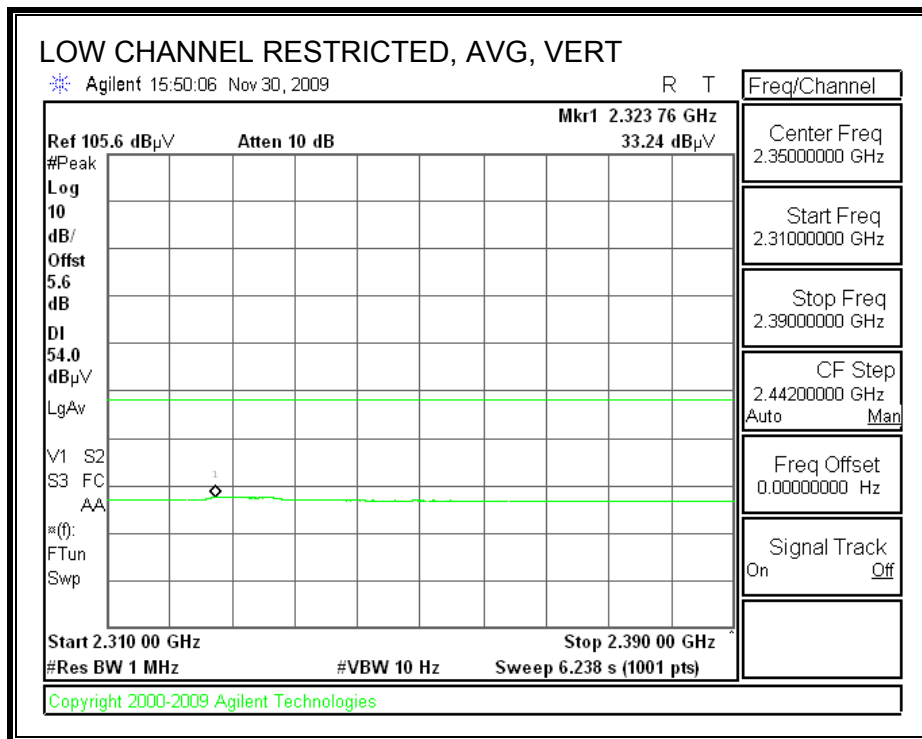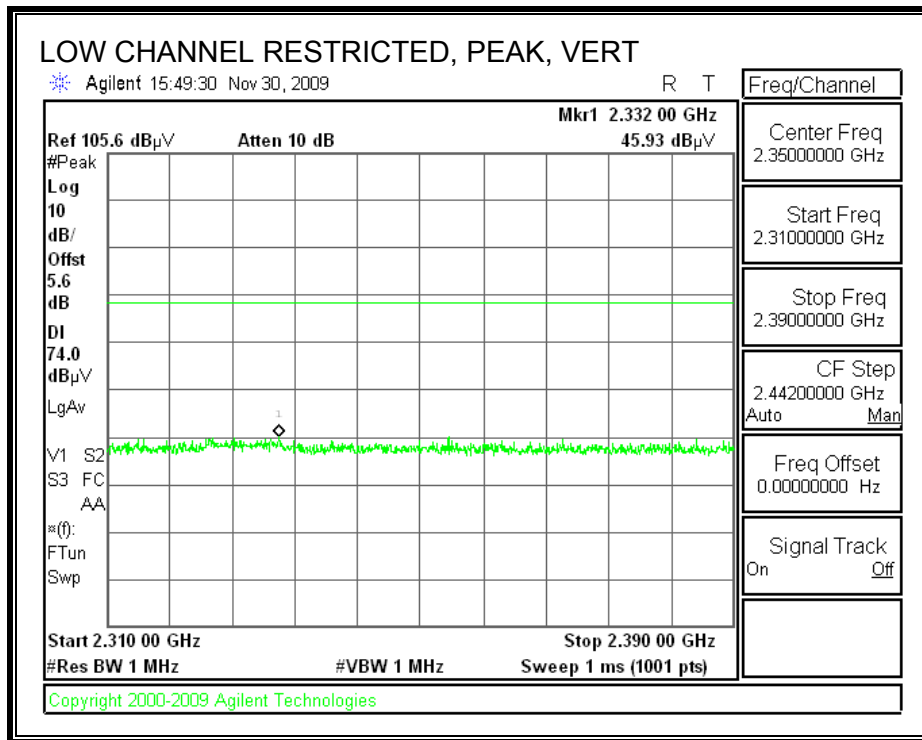


RESTRICTED BANDEDGE (HIGH CHANNEL, MARKER DELTA)



Tabular Results:


Freq (MHz)	Polarization	Detector	Reading (dBuV/m)	Delta Applied (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.5	H	PK	92.59	44.44	48.15	74	-25.85
2483.5	H	AV	35.33	44.44	-9.11	54	-63.11
2483.5	V	PK	94.41	43.52	50.89	74	-23.11
2483.5	V	AV	35.55	43.52	-7.97	54	-61.97

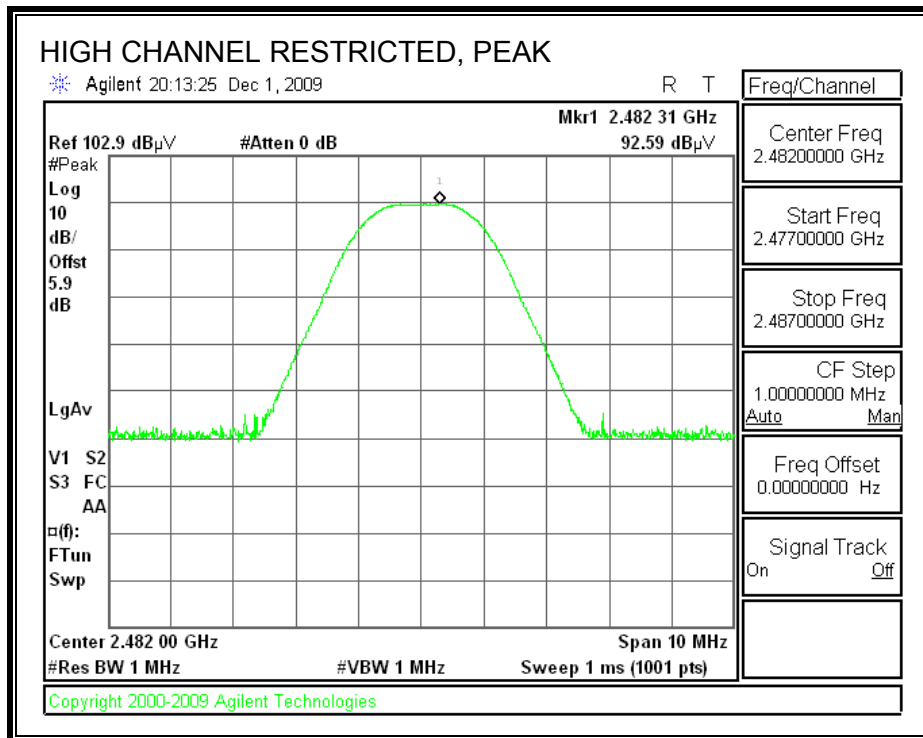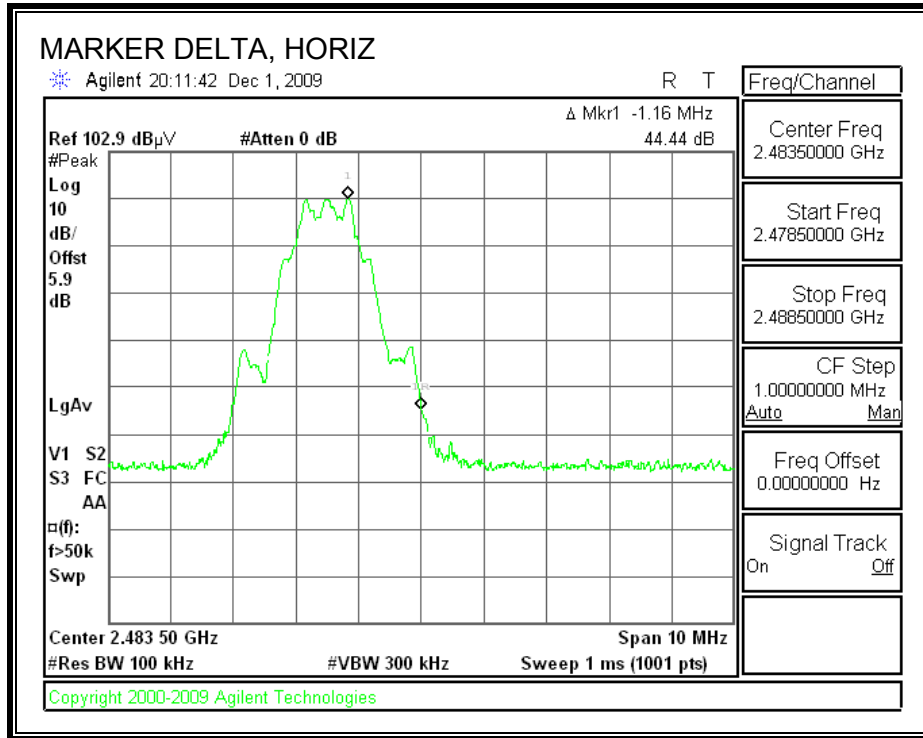

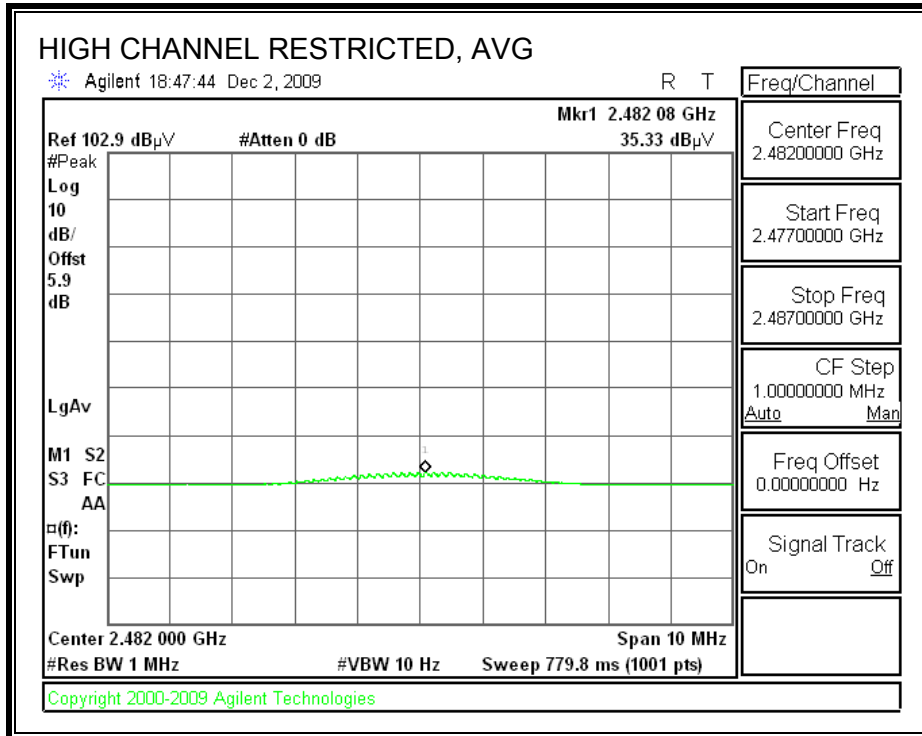

RESTRICTED BANDEDGE (HIGH CHANNEL, MARKER DELTA)

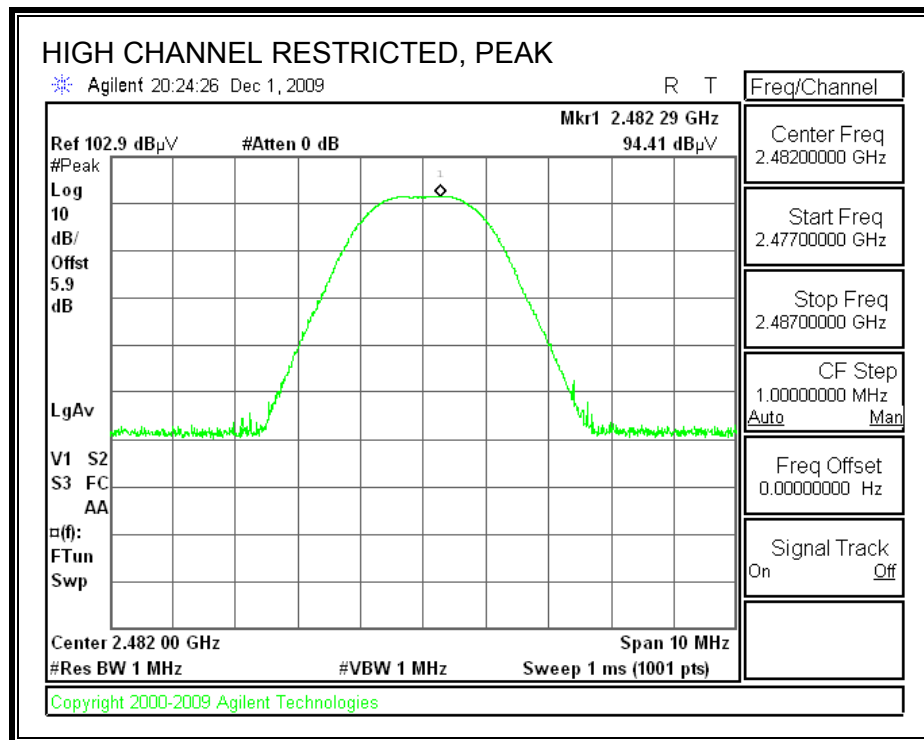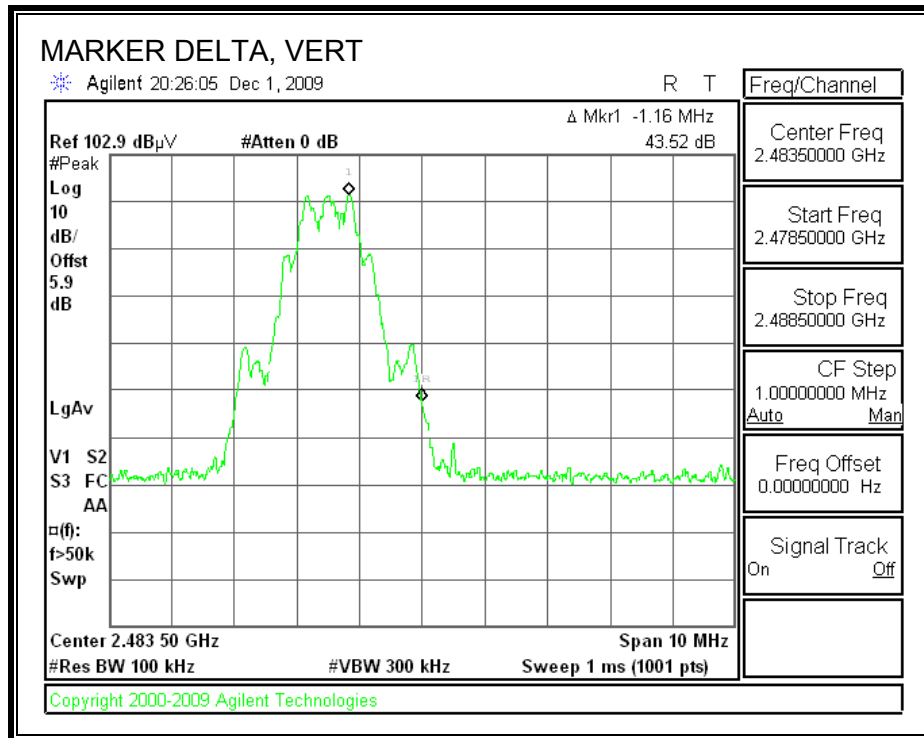

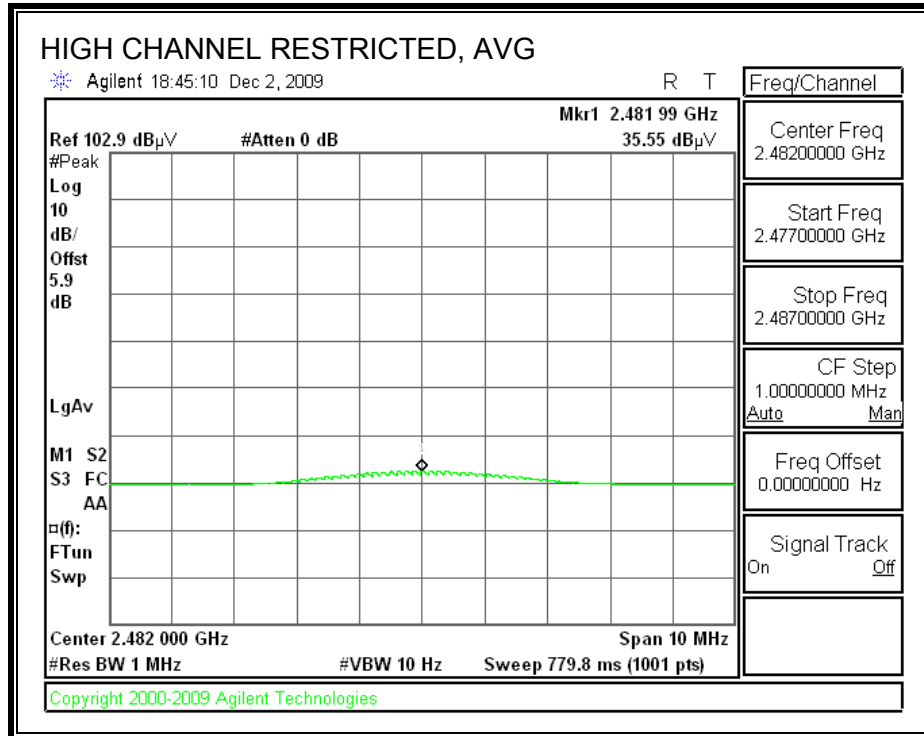

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Company: Microsoft
 Project #: 09U12932
 Date: 11/30/09
 Test Engineer: Monica Harrison
 Configuration: Laptop w/USB
 Mode: TX IC282

Test Equipment:

Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T34 HP 8449B	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit FCC 15.209
Hi Frequency Cables			HPF	Reject Filter R_002
3' cable 22807700 3' cable 22807700	12' cable 22807600 12' cable 22807600	20' cable 22807500 20' cable 22807500	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
2.402															
1.448	3.0	56.1	38.9	26.0	2.9	-37.6	0.0	0.0	47.3	30.1	74	54	-26.7	-23.9	V
1.225	3.0	54.3	36.4	25.2	2.6	-37.9	0.0	0.0	44.2	26.3	74	54	-29.8	-27.7	V
1.665	3.0	63.2	33.1	26.7	3.1	-37.3	0.0	0.0	55.7	25.6	74	54	-18.3	-28.4	V
1.448	3.0	53.9	37.9	26.0	2.9	-37.6	0.0	0.0	45.1	29.1	74	54	-28.9	-24.9	H
1.675	3.0	52.4	29.9	26.7	3.1	-37.3	0.0	0.0	44.9	22.4	74	54	-29.1	-31.6	H
2.442															
1.000	3.0	65.8	38.4	24.5	2.4	-38.3	0.0	0.0	54.4	26.9	74	54	-19.6	-27.1	V
1.125	3.0	50.4	40.7	24.9	2.5	-38.1	0.0	0.0	39.7	30.0	74	54	-34.3	-24.0	V
1.448	3.0	56.8	39.3	26.0	2.9	-37.6	0.0	0.0	48.0	30.5	74	54	-26.0	-23.5	V
1.663	3.0	64.8	30.5	26.7	3.1	-37.3	0.0	0.0	57.2	22.9	74	54	-16.8	-31.1	H
1.125	3.0	52.8	41.9	24.9	2.5	-38.1	0.0	0.0	42.1	31.2	74	54	-31.9	-22.8	H
1.225	3.0	54.0	35.9	25.2	2.6	-37.9	0.0	0.0	43.8	25.8	74	54	-30.2	-28.2	H
1.448	3.0	54.9	38.0	26.0	2.9	-37.6	0.0	0.0	46.1	29.2	74	54	-27.9	-24.8	H
2.482															
1.009	3.0	56.5	38.0	24.5	2.4	-38.2	0.0	0.0	45.1	26.7	74	54	-28.9	-27.3	V
1.224	3.0	52.7	36.7	25.2	2.6	-37.9	0.0	0.0	42.6	26.6	74	54	-31.4	-27.4	V
1.448	3.0	56.8	39.6	26.0	2.9	-37.6	0.0	0.0	48.0	30.8	74	54	-26.0	-23.2	V
1.447	3.0	54.5	38.2	26.0	2.9	-37.6	0.0	0.0	45.7	29.4	74	54	-28.3	-24.6	H
1.225	3.0	52.9	37.9	25.2	2.6	-37.9	0.0	0.0	42.8	27.8	74	54	-31.2	-26.2	H
1.996	3.0	49.1	30.2	27.8	3.5	-36.9	0.0	0.0	43.5	24.6	74	54	-30.5	-29.4	H

Rev. 11.10.08

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.3.2. RECEIVER ABOVE 1 GHz

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Company: Microsoft
Project #: 09U12932
Date: 11/30/09
Test Engineer: Monica Harrison
Configuration: Laptop w/USB
Mode: RX IC282

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T34 HP 8449B			FCC 15.209

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz ; VBW=10Hz


f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	Fitr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)
1.125	3.0	45.0	33.6	24.9	2.5	-38.1	10.0	0.0	44.3	32.9	74	54	-29.7	-21.1	V


Rev. 11.10.08

f Measurement Frequency	Amp Preamp Gain	Avg Lim Average Field Strength Limit
Dist Distance to Antenna	D Corr Distance Correct to 3 meters	Pk Lim Peak Field Strength Limit
Read Analyzer Reading	Avg Average Field Strength @ 3 m	Avg Mar Margin vs. Average Limit
AF Antenna Factor	Peak Calculated Peak Field Strength	Pk Mar Margin vs. Peak Limit
CL Cable Loss	HPF High Pass Filter	

8.3.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

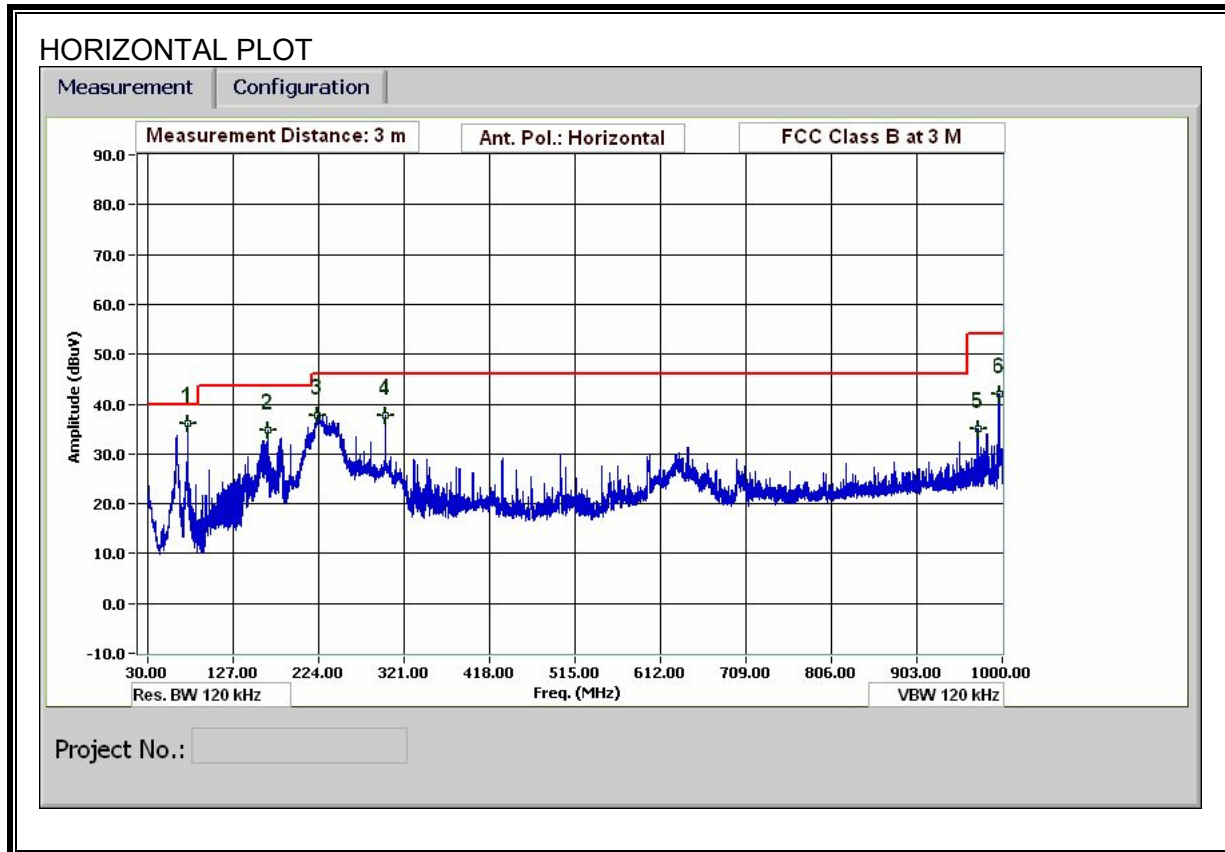

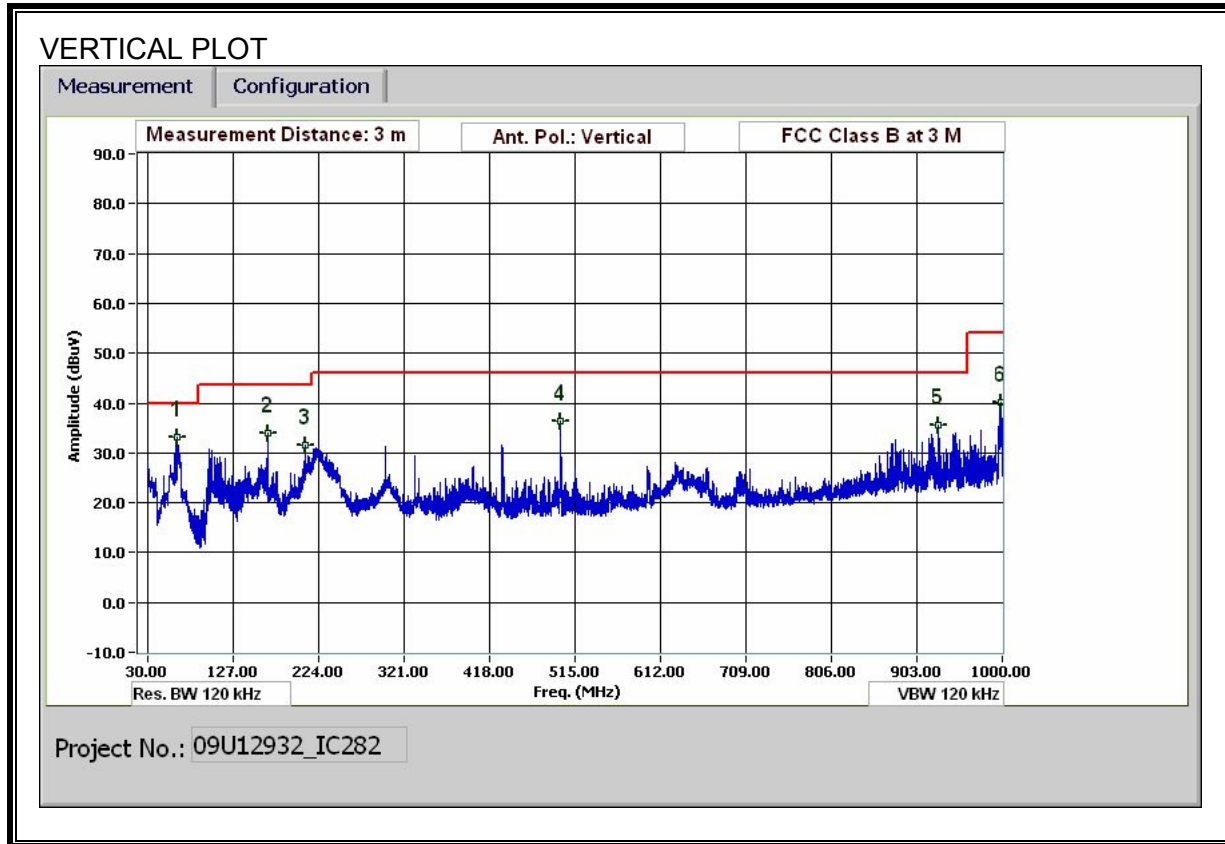

HORIZONTAL AND VERTICAL DATA

30-1000MHz Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Test Engr: Monica Harrison
 Date: 11/25/09
 Project #: 09U12932_IC828
 Company: Microsoft
 EUT Description: FHSS Module
 Test Target: FCC B
 Mode Oper: TX

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters
 Read Analyzer Reading Filter Filter Insert Loss
 AF Antenna Factor Corr. Calculated Field Strength
 CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
63.361	3.0	52.9	8.0	0.7	28.3	0.0	0.0	33.3	40.0	-6.7	V	P	
166.206	3.0	48.5	12.0	1.1	27.7	0.0	0.0	33.9	43.5	-9.6	V	P	
208.807	3.0	45.8	11.9	1.2	27.4	0.0	0.0	31.6	43.5	-11.9	V	P	
498.859	3.0	46.1	16.8	2.0	28.6	0.0	0.0	36.3	46.0	-9.7	V	P	
927.997	3.0	38.3	22.3	2.8	27.8	0.0	0.0	35.5	46.0	-10.5	V	P	
999.040	3.0	42.0	22.7	2.9	27.6	0.0	0.0	40.0	54.0	-14.0	V	P	
75.002	3.0	55.5	8.1	0.7	28.3	0.0	0.0	36.1	40.0	-3.9	H	P	
75.138	3.0	53.6	8.1	0.7	28.3	0.0	0.0	34.1	40.0	-5.9	H	QP	
166.566	3.0	49.5	11.9	1.1	27.7	0.0	0.0	34.8	43.5	-8.7	H	P	
221.888	3.0	51.9	11.9	1.2	27.4	0.0	0.0	37.6	46.0	-8.4	H	P	
299.411	3.0	50.3	13.5	1.5	27.4	0.0	0.0	37.8	46.0	-8.2	H	P	
972.039	3.0	37.5	22.5	2.9	27.7	0.0	0.0	35.2	54.0	-18.8	H	P	
996.280	3.0	44.2	22.7	2.9	27.6	0.0	0.0	42.1	54.0	-11.9	H	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Class	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.17	55.16	--	39.23	0.00	65.06	55.06	-9.90	-15.83	L1
0.28	45.76	--	33.96	0.00	60.76	50.76	-15.00	-16.80	L1
3.80	44.11	--	30.68	0.00	56.00	46.00	-11.89	-15.32	L1
0.17	56.59	--	39.75	0.00	65.06	55.06	-8.47	-15.31	L2
2.08	38.88	--	29.30	0.00	56.00	46.00	-17.12	-16.70	L2
3.74	42.52	--	28.39	0.00	56.00	46.00	-13.48	-17.61	L2
6 Worst Data									

LINE 1 RESULTS



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 7 File#: L1_01_00_EV3B_IC282.emi Date: 11-25-2009 Time: 18:37:34

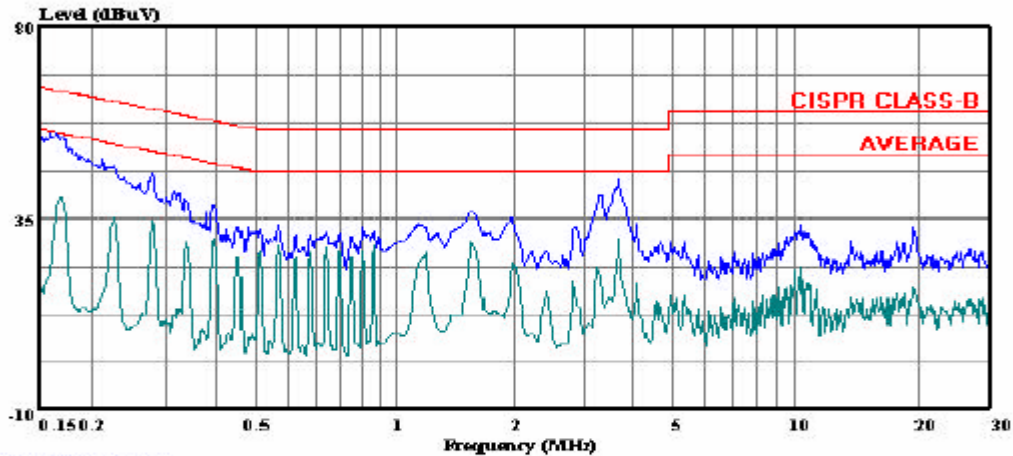


(Line Conduction)

Trace: 5

Ref Trace:

Condition: CISPR CLASS-B
Test Operator: : Monica Harrison
Project #: : 09U12932
Company: : Microsoft
EUT Description: : FHSS Module
Configuration: : EUT and Laptop
Mode: : TX (Worst Case)
Target: : FCC Class B
Voltage: : 115V / 60Hz
: L1: Peak (Blue), Average (Green)

LINE 2 RESULTS

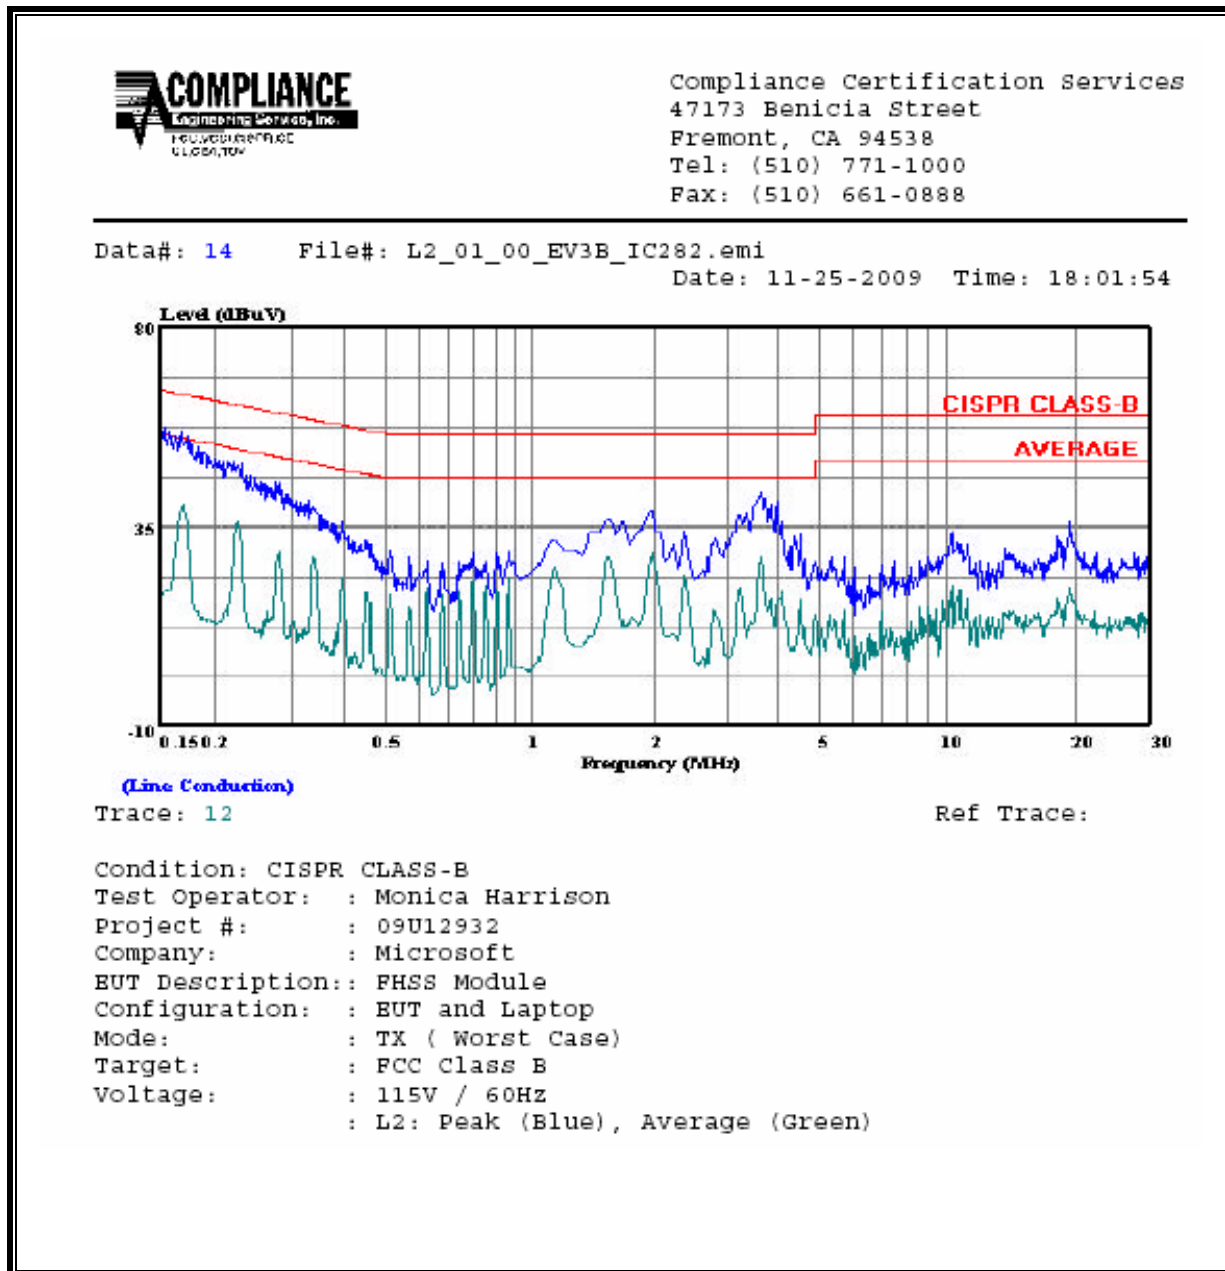

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

From IC Safety Code 6, Section 2.2 Table 5 Column 4, $S = 10 \text{ W/m}^2$

RESULTS

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
FHSS	2.4 GHz	20.0	4.72	5.00	0.0019	0.0186

END OF REPORT