



# FCC TEST REPORT

**REPORT NO.:** RF120130C22

**MODEL NO.:** 1497

**FCC ID:** C3K1497

**RECEIVED:** Jan. 16, 2012

**TESTED:** Jan. 16 ~ Jan. 19, 2012

**ISSUED:** Feb. 01, 2012

**APPLICANT:** Microsoft Corporation

**ADDRESS:** One Microsoft Way, Redmond WA 98052-6399,  
U.S.A

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New  
Taipei City, Taiwan (R.O.C)

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 50 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





## TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION .....	5
2. SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY.....	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT .....	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	9
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	10
3.4 DESCRIPTION OF SUPPORT UNITS .....	10
4. TEST TYPES AND RESULTS .....	11
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	11
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	11
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES .....	13
4.1.4 DEVIATION FROM TEST STANDARD .....	13
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS .....	14
4.1.7 TEST RESULTS .....	15
4.2 NUMBER OF HOPPING FREQUENCY USED .....	30
4.2.1 LIMIT OF HOPPING FREQUENCY USED.....	30
4.2.2 TEST SETUP.....	30
4.2.3 TEST INSTRUMENTS.....	30
4.2.4 TEST PROCEDURES .....	30
4.2.5 DEVIATION FROM TEST STANDARD .....	30
4.2.6 TEST RESULTS .....	30
4.3 DWELL TIME ON EACH CHANNEL .....	32
4.3.1 LIMIT OF DWELL TIME USED.....	32
4.3.2 TEST SETUP.....	32
4.3.3 TEST INSTRUMENTS.....	32
4.3.4 TEST PROCEDURES .....	32
4.3.5 DEVIATION FROM TEST STANDARD .....	32
4.3.6 TEST RESULTS .....	33
4.4 CHANNEL BANDWIDTH.....	37
4.4.1 LIMITS OF CHANNEL BANDWIDTH .....	37
4.4.2 TEST SETUP.....	37
4.4.3 TEST INSTRUMENTS.....	37
4.4.4 TEST PROCEDURE.....	37
4.4.5 DEVIATION FROM TEST STANDARD .....	37
4.4.6 EUT OPERATING CONDITION .....	37
4.4.7 TEST RESULTS .....	38
4.5 HOPPING CHANNEL SEPARATION .....	39
4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION .....	39
4.5.2 TEST SETUP.....	39
4.5.3 TEST INSTRUMENTS.....	39
4.5.4 TEST PROCEDURES .....	39
4.5.5 DEVIATION FROM TEST STANDARD .....	39
4.5.6 TEST RESULTS .....	40



A D T

4.6	MAXIMUM OUTPUT POWER.....	41
4.6.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT .....	41
4.6.2	TEST SETUP.....	41
4.6.3	TEST INSTRUMENTS.....	41
4.6.4	TEST PROCEDURES .....	41
4.6.5	DEVIATION FROM TEST STANDARD .....	41
4.6.6	EUT OPERATING CONDITION .....	41
4.6.7	TEST RESULTS .....	42
4.7	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	43
4.7.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	43
4.7.2	TEST INSTRUMENTS.....	43
4.7.3	TEST PROCEDURE.....	43
4.7.4	DEVIATION FROM TEST STANDARD .....	43
4.7.5	EUT OPERATING CONDITION .....	43
4.7.6	TEST RESULTS .....	43
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	48
6.	INFORMATION ON THE TESTING LABORATORIES .....	49
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	50



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Feb. 01, 2012

## 1. CERTIFICATION

**PRODUCT:** Microsoft Wireless Mouse  
**MODEL:** 1497  
**BRAND:** Microsoft  
**APPLICANT:** Microsoft Corporation  
**TESTED:** Jan. 16 ~ Jan. 19, 2012  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS:** **FCC Part 15, Subpart C (Section 15.247)**  
ANSI C63.4-2003  
ANSI C63.10-2009

The above equipment (model: 1497) have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , DATE: Feb. 01, 2012  
Pettie Chen / Specialist

APPROVED BY :  , DATE: Feb. 01, 2012  
Gary Chang / Technical Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	NA	Power supply is 3Vdc from batteries.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -12.9dB at 2398.0MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

**NOTE:** If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Microsoft Wireless Mouse
<b>MODEL NO.</b>	1497
<b>FCC ID</b>	C3K1497
<b>POWER SUPPLY</b>	3.0Vdc (battery)
<b>MODULATION TYPE</b>	GFSK
<b>MODULATION TECHNOLOGY</b>	FHSS
<b>TRANSFER RATE</b>	1Mbps
<b>FREQUENCY RANGE</b>	2402 ~ 2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>MAX. OUTPUT POWER</b>	0.847mW
<b>ANTENNA TYPE</b>	Monopole line, printed on PCB antenna with 5.49dBi gain
<b>ANTENNA CONNECTOR</b>	NA
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ACCESSORY DEVICES</b>	Battery (3Vdc, 100 mA)

**NOTE:**

1. The following samples are provided for final test.

<b>SAMPLE</b>	<b>SERIAL NO.</b>
Sample 1	185
Sample 2	295
Sample 3	330


2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

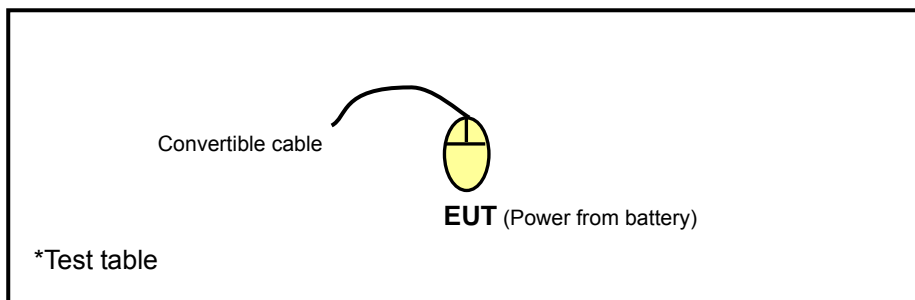



### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE $\geq$ 1G	RE $<$ 1G	APCM	
A	√	√	-	Serial No.: 185
B	√	√	√	Serial No.: 295
C	√	√	-	Serial No.: 330

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz      **RE $<$ 1G**: Radiated Emission below 1GHz

**APCM**: Antenna Port Conducted Measurement

**NOTE**: "-": Means no effect.

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A, B, C	0 to 78	0, 39, 78	GFSK

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A, B, C	0 to 78	39	GFSK

#### ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
B	0 to 78	0, 39, 78	GFSK



A D T

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	22deg. C, 65%RH	120Vac, 60Hz	Antony Lee
RE $<$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Sun Lin
APCM	25deg. C, 65%RH	120Vac, 60Hz	Brad Wu

**3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**ANSI C63.4-2003**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit.

## 4. TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 19, 2011	Apr. 18, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 04, 2011	Aug. 03, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 12, 2011	Apr. 11, 2012
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Sep. 06, 2011	Sep. 05, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 20, 2011	Jul. 19, 2012
Preamplifier Agilent	8449B	3008A01911	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8447D	2944A10638	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295013/4 283403/4	Aug. 19, 2011	Aug. 18, 2012
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 13, 2011	Aug. 12, 2012
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA
High Speed Peak Power Meter	ML2495A	0842014	Apr. 26, 2011	Apr. 25, 2012
Power Sensor	MA2411B	0738404	Apr. 26, 2011	Apr. 25, 2012

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 9.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 460141.
  5. The IC Site Registration No. is IC 7450F-4.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

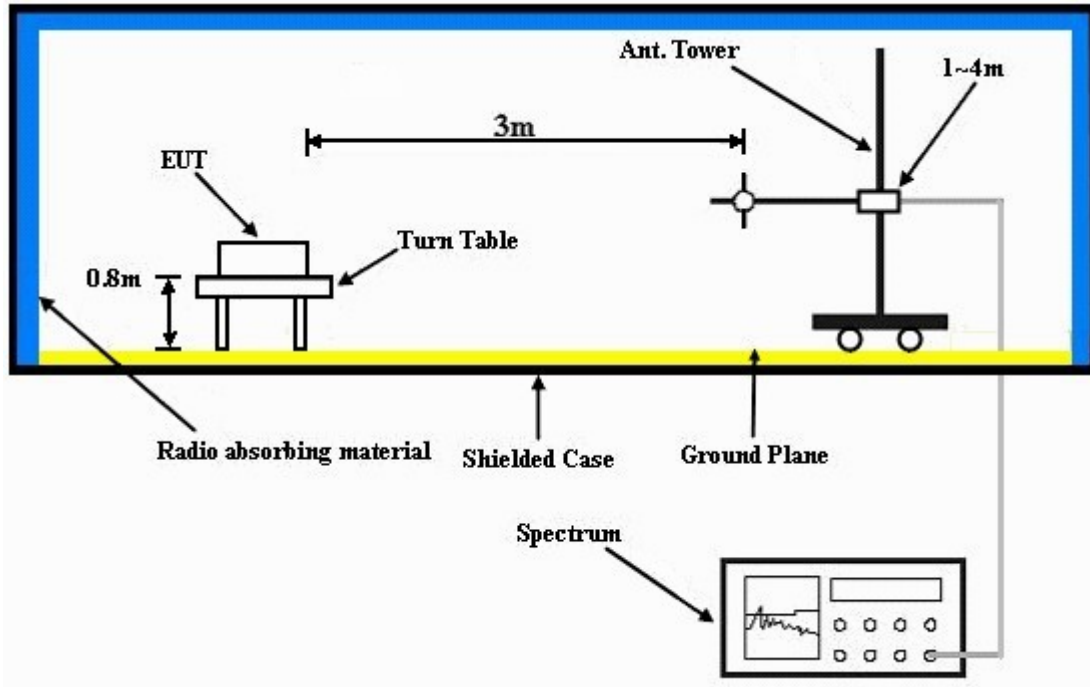

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 TEST RESULTS

##### ABOVE 1GHz WORST-CASE DATA : GFSK

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	38.9 PK	74.0	-35.1	1.35 H	140	7.00	31.90
2	2390.00	29.3 AV	54.0	-24.7	1.35 H	140	-2.60	31.90
3	#2398.00	41.3 PK	80.1	-38.8	1.36 H	140	9.40	31.90
4	#2398.00	32.0 AV	50.0	-18.0	1.36 H	140	0.10	31.90
5	#2400.00	41.9 PK	80.1	-38.2	1.37 H	140	10.00	31.90
6	#2400.00	11.8 AV	50.0	-38.2	1.37 H	140	-20.10	31.90
7	*2402.00	100.1 PK			1.37 H	140	68.20	31.90
8	*2402.00	70.0 AV			1.37 H	140	38.10	31.90
9	4804.00	46.9 PK	74.0	-27.1	1.00 H	25	8.90	38.00
10	4804.00	16.8 AV	54.0	-37.2	1.00 H	25	-21.20	38.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	37.9 PK	74.0	-36.1	1.00 V	274	5.80	32.10
2	2390.00	28.5 AV	54.0	-25.5	1.00 V	274	-3.60	32.10
3	#2398.00	38.4 PK	71.1	-32.7	1.00 V	274	6.20	32.20
4	#2398.00	28.1 AV	41.0	-12.9	1.00 V	274	-4.10	32.20
5	#2400.00	34.1 PK	71.1	-37.0	1.00 V	274	1.90	32.20
6	#2400.00	4.0 AV	41.0	-37.0	1.00 V	274	-28.20	32.20
7	*2402.00	91.1 PK			1.00 V	274	58.90	32.20
8	*2402.00	61.0 AV			1.00 V	274	28.80	32.20
9	4804.00	47.9 PK	74.0	-26.1	1.00 V	193	9.40	38.50
10	4804.00	17.8 AV	54.0	-36.2	1.00 V	193	-20.70	38.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .
  8. "#": The radiated frequency is out the restricted band.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	101.8 PK			1.34 H	142	69.80	32.00
2	*2441.00	71.7 AV			1.34 H	142	39.70	32.00
3	4882.00	46.7 PK	74.0	-27.3	1.00 H	26	8.50	38.20
4	4882.00	16.6 AV	54.0	-37.4	1.00 H	26	-21.60	38.20
5	7323.00	52.4 PK	74.0	-21.6	1.00 H	258	7.80	44.60
6	7323.00	22.3 AV	54.0	-31.7	1.00 H	258	-22.30	44.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	90.7 PK			1.00 V	276	58.70	32.00
2	*2441.00	60.6 AV			1.00 V	276	28.60	32.00
3	4882.00	48.0 PK	74.0	-26.0	1.00 V	199	9.80	38.20
4	4882.00	17.9 AV	54.0	-36.1	1.00 V	199	-20.30	38.20
5	7323.00	53.1 PK	74.0	-20.9	1.00 V	201	8.50	44.60
6	7323.00	23.0 AV	54.0	-31.0	1.00 V	201	-21.60	44.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.3 PK			1.33 H	144	69.10	32.20
2	*2480.00	71.2 AV			1.33 H	144	39.00	32.20
3	2483.50	39.0 PK	74.0	-35.0	1.33 H	144	6.80	32.20
4	2483.50	8.9 AV	54.0	-45.1	1.33 H	144	-23.30	32.20
5	2485.50	42.0 PK	74.0	-32.0	1.35 H	145	9.80	32.20
6	2485.50	31.5 AV	54.0	-22.5	1.35 H	145	-0.70	32.20
7	4960.00	47.4 PK	74.0	-26.6	1.00 H	27	9.00	38.40
8	4960.00	17.3 AV	54.0	-36.7	1.00 H	27	-21.10	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.6 PK			1.00 V	270	58.40	32.20
2	*2480.00	60.5 AV			1.00 V	270	28.30	32.20
3	2483.50	33.2 PK	74.0	-40.8	1.00 V	270	1.00	32.20
4	2483.50	3.1 AV	54.0	-50.9	1.00 V	270	-29.10	32.20
5	2485.50	39.1 PK	74.0	-34.9	1.00 V	270	6.90	32.20
6	2485.50	28.3 AV	54.0	-25.7	1.00 V	270	-3.90	32.20
7	4960.00	46.2 PK	74.0	-27.8	1.00 V	199	7.80	38.40
8	4960.00	16.1 AV	54.0	-37.9	1.00 V	199	-22.30	38.40

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	40.5 PK	74.0	-33.5	1.09 H	347	9.00	31.50
2	2390.00	28.7 AV	54.0	-25.3	1.09 H	347	-2.80	31.50
3	#2398.00	42.8 PK	80.3	-37.5	1.09 H	347	11.30	31.50
4	#2398.00	30.8 AV	50.2	-19.4	1.09 H	347	-0.70	31.50
5	#2400.00	37.9 PK	80.3	-42.4	1.09 H	347	6.40	31.50
6	#2400.00	7.8 AV	50.2	-42.4	1.09 H	347	-23.70	31.50
7	*2402.00	100.3 PK			1.09 H	347	68.70	31.60
8	*2402.00	70.2 AV			1.09 H	347	38.60	31.60
9	4804.00	46.5 PK	74.0	-27.5	1.15 H	18	8.90	37.60
10	4804.00	16.4 AV	54.0	-37.6	1.15 H	18	-21.20	37.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	38.5 PK	74.0	-35.5	1.36 V	39	7.00	31.50
2	2390.00	27.8 AV	54.0	-26.2	1.36 V	39	-3.70	31.50
3	#2398.00	39.7 PK	72.2	-32.5	1.36 V	39	8.20	31.50
4	#2398.00	28.6 AV	42.1	-13.5	1.36 V	39	-2.90	31.50
5	#2400.00	33.9 PK	72.2	-38.3	1.36 V	39	2.40	31.50
6	#2400.00	3.8 AV	42.1	-38.3	1.36 V	39	-27.70	31.50
7	*2402.00	92.2 PK			1.36 V	39	60.60	31.60
8	*2402.00	62.1 AV			1.36 V	39	30.50	31.60
9	4804.00	46.6 PK	74.0	-27.4	1.22 V	145	9.00	37.60
10	4804.00	16.5 AV	54.0	-37.5	1.22 V	145	-21.10	37.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .
  8. "#":The radiated frequency is out the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.0 PK			1.12 H	324	68.30	31.70
2	*2441.00	69.9 AV			1.12 H	324	38.20	31.70
3	4882.00	47.7 PK	74.0	-26.3	1.15 H	18	9.90	37.80
4	4882.00	17.6 AV	54.0	-36.4	1.15 H	18	-20.20	37.80
5	7323.00	47.2 PK	74.0	-26.8	1.22 H	47	3.30	43.90
6	7323.00	17.1 AV	54.0	-36.9	1.22 H	47	-26.80	43.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	91.7 PK			1.38 V	22	60.00	31.70
2	*2441.00	61.6 AV			1.38 V	22	29.90	31.70
3	4882.00	46.9 PK	74.0	-27.1	1.31 V	70	9.10	37.80
4	4882.00	16.8 AV	54.0	-37.2	1.31 V	70	-21.00	37.80
5	7323.00	52.8 PK	74.0	-21.2	1.51 V	218	8.90	43.90
6	7323.00	22.7 AV	54.0	-31.3	1.51 V	218	-21.20	43.90

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.6 PK			1.31 H	343	67.70	31.90
2	*2480.00	69.5 AV			1.31 H	343	37.60	31.90
3	2483.50	40.1 PK	74.0	-33.9	1.31 H	343	8.20	31.90
4	2483.50	10.0 AV	54.0	-44.0	1.31 H	343	-21.90	31.90
5	2485.50	48.5 PK	74.0	-25.5	1.31 H	343	16.60	31.90
6	2485.50	37.2 AV	54.0	-16.8	1.31 H	343	5.30	31.90
7	4960.00	46.8 PK	74.0	-27.2	1.01 H	78	8.80	38.00
8	4960.00	16.7 AV	54.0	-37.3	1.01 H	78	-21.30	38.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.3 PK			1.28 V	45	59.40	31.90
2	*2480.00	61.2 AV			1.28 V	45	29.30	31.90
3	2483.50	36.7 PK	74.0	-37.3	1.28 V	45	4.80	31.90
4	2483.50	6.6 AV	54.0	-47.4	1.28 V	45	-25.30	31.90
5	2485.50	45.7 PK	74.0	-28.3	1.28 V	45	13.80	31.90
6	2485.50	35.3 AV	54.0	-18.7	1.28 V	45	3.40	31.90
7	4960.00	46.3 PK	74.0	-27.7	1.34 V	152	8.30	38.00
8	4960.00	16.2 AV	54.0	-37.8	1.34 V	152	-21.80	38.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	39.2 PK	74.0	-34.8	1.35 H	329	7.70	31.50
2	2390.00	27.8 AV	54.0	-26.2	1.35 H	329	-3.70	31.50
3	#2398.00	41.9 PK	80.2	-38.3	1.35 H	329	10.40	31.50
4	#2398.00	30.3 AV	50.1	-19.8	1.35 H	329	-1.20	31.50
5	#2400.00	39.3 PK	80.2	-40.9	1.35 H	329	7.80	31.50
6	#2400.00	9.2 AV	50.1	-40.9	1.35 H	329	-22.30	31.50
7	*2402.00	100.2 PK			1.35 H	329	68.60	31.60
8	*2402.00	70.1 AV			1.35 H	329	38.50	31.60
9	4804.00	46.2 PK	74.0	-27.8	1.03 H	340	8.60	37.60
10	4804.00	16.1 AV	54.0	-37.9	1.03 H	340	-21.50	37.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	38.5 PK	74.0	-35.5	1.35 V	18	7.00	31.50
2	2390.00	28.0 AV	54.0	-26.0	1.35 V	18	-3.50	31.50
3	#2398.00	40.3 PK	72.2	-31.9	1.35 V	18	8.80	31.50
4	#2398.00	28.3 AV	42.1	-13.8	1.35 V	18	-3.20	31.50
5	#2400.00	33.5 PK	72.2	-38.7	1.35 V	18	2.00	31.50
6	#2400.00	3.4 AV	42.1	-38.7	1.35 V	18	-28.10	31.50
7	*2402.00	92.2 PK			1.35 V	18	60.60	31.60
8	*2402.00	62.1 AV			1.35 V	18	30.50	31.60
9	4804.00	47.3 PK	74.0	-26.7	1.06 V	199	9.70	37.60
10	4804.00	17.2 AV	54.0	-36.8	1.06 V	199	-20.40	37.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .
  8. "#":The radiated frequency is out the restricted band.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	99.3 PK			1.12 H	351	67.60	31.70
2	*2441.00	69.2 AV			1.12 H	351	37.50	31.70
3	4882.00	47.2 PK	74.0	-26.8	1.57 H	135	9.40	37.80
4	4882.00	17.1 AV	54.0	-36.9	1.57 H	135	-20.70	37.80
5	7323.00	52.9 PK	74.0	-21.1	1.05 H	17	9.00	43.90
6	7323.00	22.8 AV	54.0	-31.2	1.05 H	17	-21.10	43.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	91.5 PK			1.32 V	77	59.80	31.70
2	*2441.00	61.4 AV			1.32 V	77	29.70	31.70
3	4882.00	46.7 PK	74.0	-27.3	1.05 V	204	8.90	37.80
4	4882.00	16.6 AV	54.0	-37.4	1.05 V	204	-21.20	37.80
5	7323.00	51.7 PK	74.0	-22.3	1.75 V	273	7.80	43.90
6	7323.00	21.6 AV	54.0	-32.4	1.75 V	273	-22.30	43.90

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Antony Lee
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.0 PK			1.34 H	350	67.10	31.90
2	*2480.00	68.9 AV			1.34 H	350	37.00	31.90
3	2483.50	41.0 PK	74.0	-33.0	1.34 H	350	9.10	31.90
4	2483.50	10.9 AV	54.0	-43.1	1.34 H	350	-21.00	31.90
5	2485.50	40.2 PK	74.0	-33.8	1.34 H	350	8.30	31.90
6	2485.50	29.2 AV	54.0	-24.8	1.34 H	350	-2.70	31.90
7	4960.00	47.0 PK	74.0	-27.0	1.54 H	115	9.00	38.00
8	4960.00	16.9 AV	54.0	-37.1	1.54 H	115	-21.10	38.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.1 PK			1.28 V	57	59.20	31.90
2	*2480.00	61.0 AV			1.28 V	57	29.10	31.90
3	2483.50	33.8 PK	74.0	-40.2	1.28 V	57	1.90	31.90
4	2483.50	3.7 AV	54.0	-50.3	1.28 V	57	-28.20	31.90
5	2485.50	40.8 PK	74.0	-33.2	1.28 V	57	8.90	31.90
6	2485.50	28.5 AV	54.0	-25.5	1.28 V	57	-3.40	31.90
7	4960.00	48.0 PK	74.0	-26.0	1.15 V	194	10.00	38.00
8	4960.00	17.9 AV	54.0	-36.1	1.15 V	194	-20.10	38.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB.
  7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

**BELOW 1GHz WORST-CASE DATA : GFSK**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	107.67	18.0 QP	43.5	-25.5	2.00 H	94	7.60	10.40
2	142.67	20.9 QP	43.5	-22.6	1.00 H	10	7.20	13.70
3	234.05	23.8 QP	46.0	-22.2	1.00 H	325	11.30	12.50
4	372.09	22.1 QP	46.0	-23.9	2.00 H	10	5.30	16.80
5	525.69	26.8 QP	46.0	-19.2	1.00 H	10	6.00	20.80
6	545.14	27.0 QP	46.0	-19.0	2.00 H	10	5.80	21.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	107.67	26.3 QP	43.5	-17.2	1.25 V	58	15.90	10.40
2	162.11	22.9 QP	43.5	-20.6	1.00 V	34	8.90	14.00
3	189.33	25.6 QP	43.5	-17.9	1.00 V	235	13.50	12.10
4	243.77	21.9 QP	46.0	-24.1	1.00 V	97	9.00	12.90
5	350.71	20.9 QP	46.0	-25.1	1.00 V	91	4.60	16.30
6	381.82	19.1 QP	46.0	-26.9	2.00 V	124	2.00	17.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	162.11	19.2 QP	43.5	-24.3	2.00 H	64	5.20	14.00
2	239.88	24.8 QP	46.0	-21.2	1.25 H	43	12.10	12.70
3	374.04	22.2 QP	46.0	-23.8	1.00 H	343	5.30	16.90
4	455.70	23.0 QP	46.0	-23.0	2.00 H	331	4.00	19.00
5	525.69	26.4 QP	46.0	-19.6	1.00 H	10	5.60	20.80
6	574.30	23.6 QP	46.0	-22.4	1.25 H	10	1.70	21.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.79	17.6 QP	40.0	-22.4	1.25 V	334	5.00	12.60
2	107.67	25.1 QP	43.5	-18.4	1.00 V	226	14.70	10.40
3	189.33	26.2 QP	43.5	-17.3	1.25 V	232	14.10	12.10
4	243.77	22.3 QP	46.0	-23.7	1.00 V	127	9.40	12.90
5	350.71	20.7 QP	46.0	-25.3	1.00 V	319	4.40	16.30
6	525.69	21.4 QP	46.0	-24.6	1.50 V	34	0.60	20.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	107.67	18.7 QP	43.5	-24.8	2.00 H	262	8.30	10.40
2	162.11	20.4 QP	43.5	-23.1	2.00 H	346	6.40	14.00
3	239.88	27.5 QP	46.0	-18.5	1.00 H	148	14.80	12.70
4	274.88	24.4 QP	46.0	-21.6	1.00 H	112	10.40	14.00
5	525.69	26.0 QP	46.0	-20.0	1.25 H	256	5.20	20.80
6	545.14	26.7 QP	46.0	-19.3	1.00 H	220	5.50	21.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	107.67	26.0 QP	43.5	-17.5	1.00 V	148	15.60	10.40
2	134.89	21.6 QP	43.5	-21.9	1.00 V	10	8.40	13.20
3	162.11	22.4 QP	43.5	-21.1	1.00 V	7	8.40	14.00
4	189.33	25.2 QP	43.5	-18.3	2.00 V	226	13.10	12.10
5	243.77	22.8 QP	46.0	-23.2	1.00 V	85	9.90	12.90
6	350.71	21.4 QP	46.0	-24.6	1.00 V	202	5.10	16.30


- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

## 4.2 NUMBER OF HOPPING FREQUENCY USED

### 4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

### 4.2.2 TEST SETUP



### 4.2.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.2.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

### 4.2.5 DEVIATION FROM TEST STANDARD

No deviation.



### 4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T

### GFSK

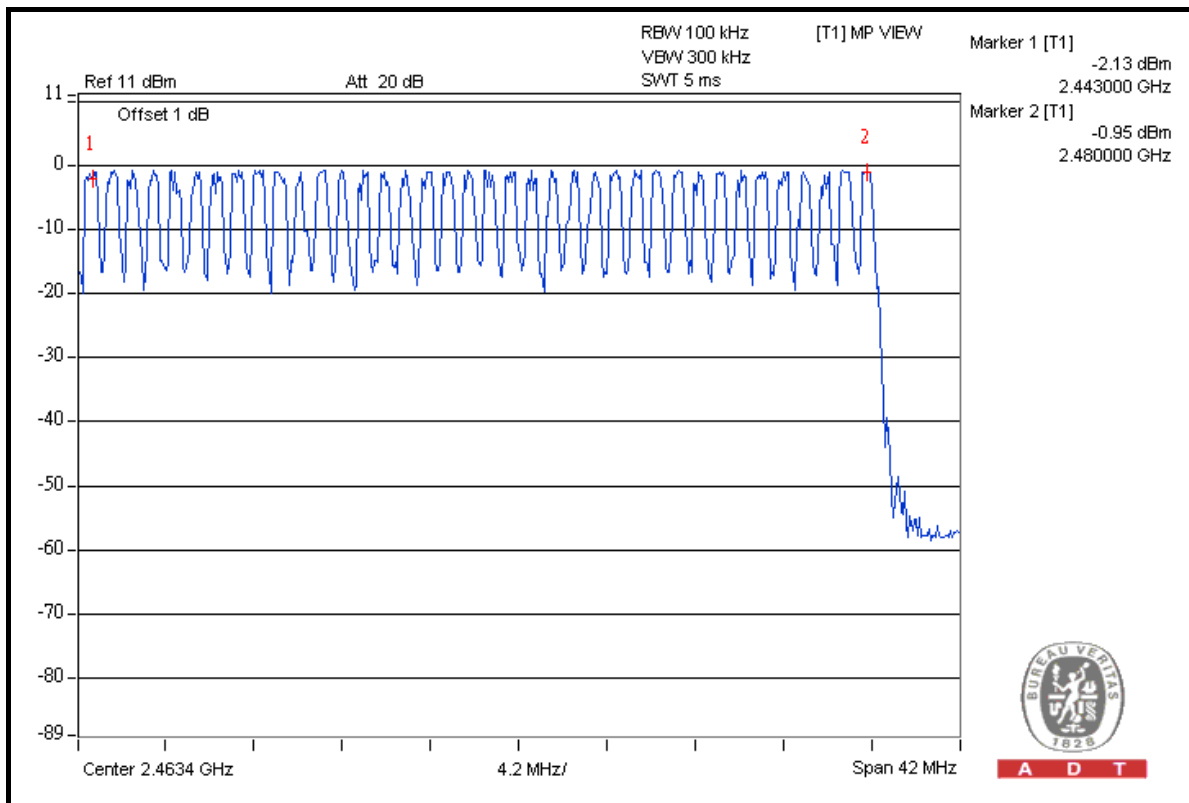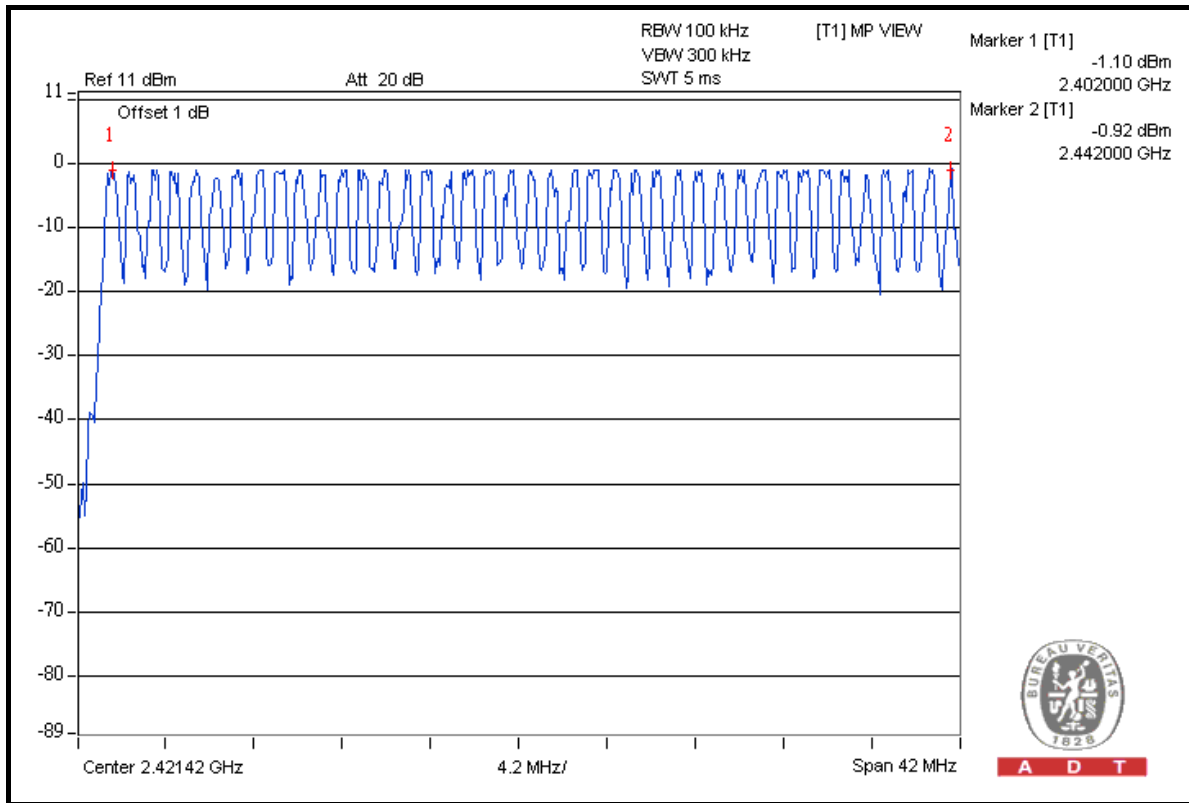


### 4.3 DWELL TIME ON EACH CHANNEL

#### 4.3.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 4.3.2 TEST SETUP



#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.



### 4.3.6 TEST RESULTS

#### GFSK



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.468	147.888	400
DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.734	295.890	400
DH5	18 (times / 5 sec) * 6.32 = 113.76 times	3.000	341.280	400

**NOTE:** Test plots of the transmitting time slot are shown on next 3 pages.



A D T



### DH1

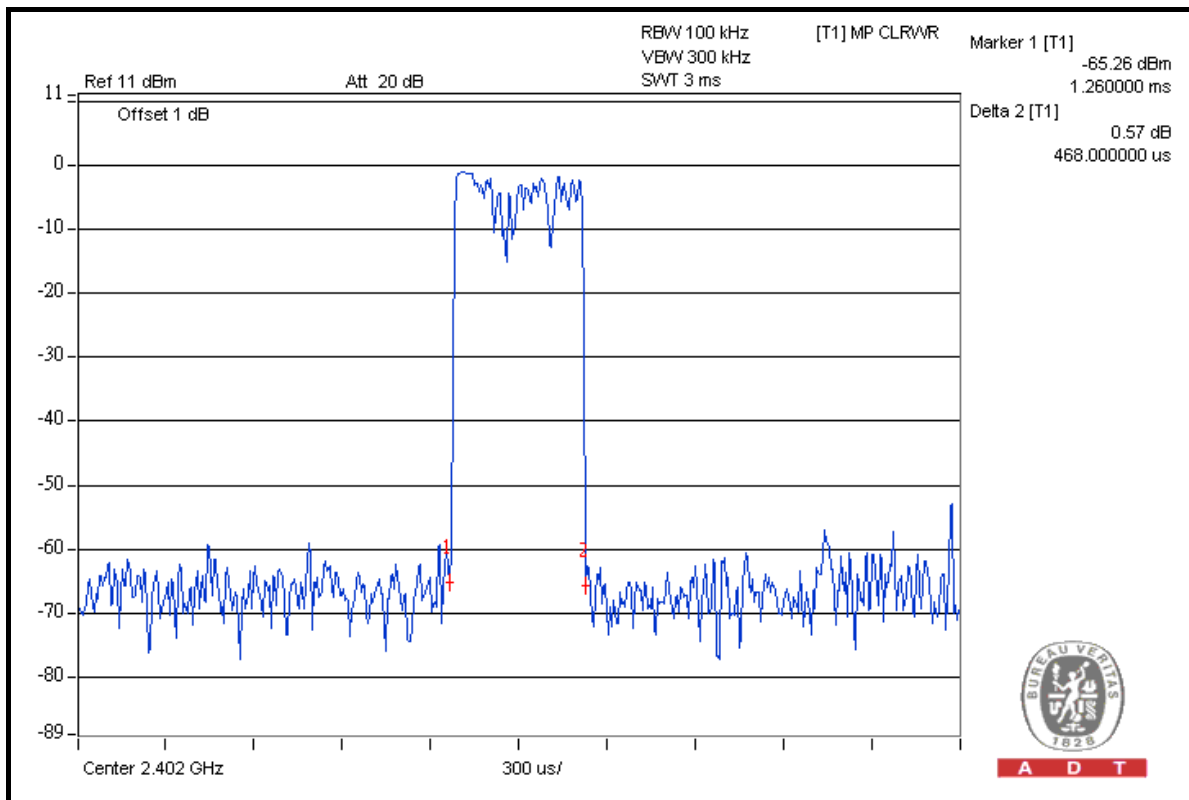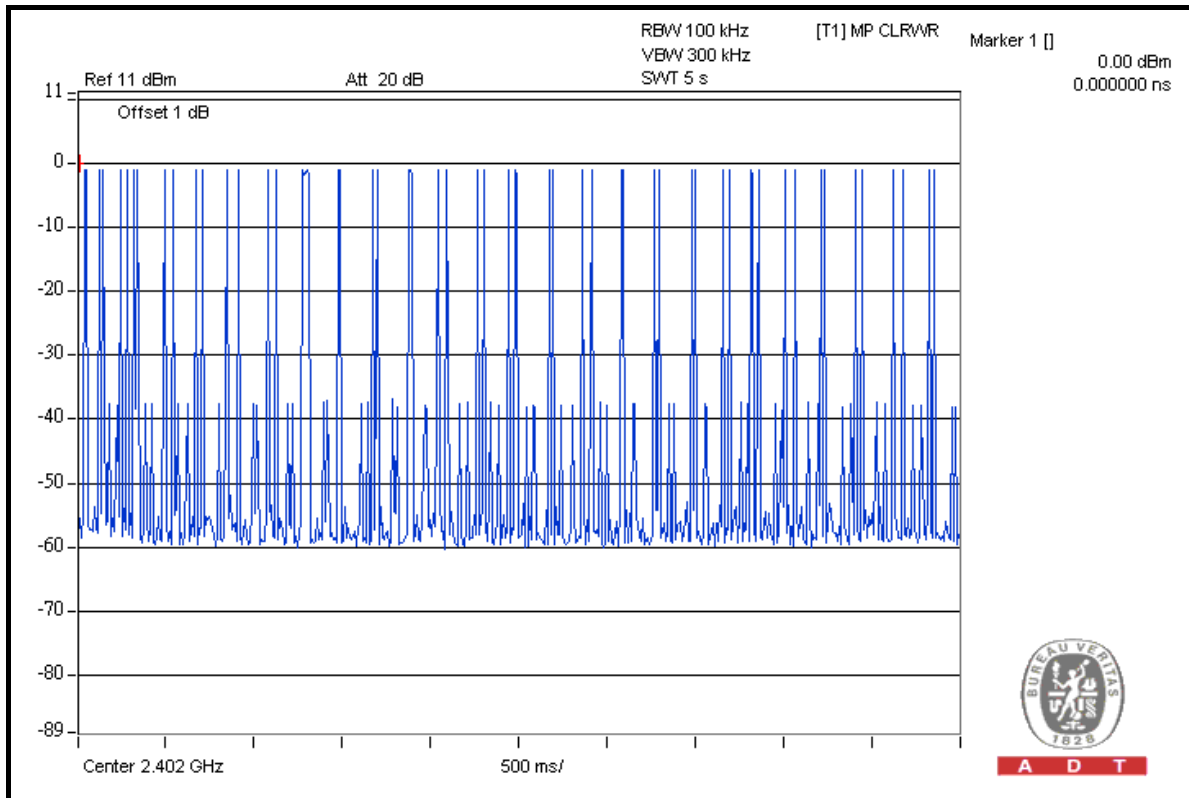



A D T



### DH3

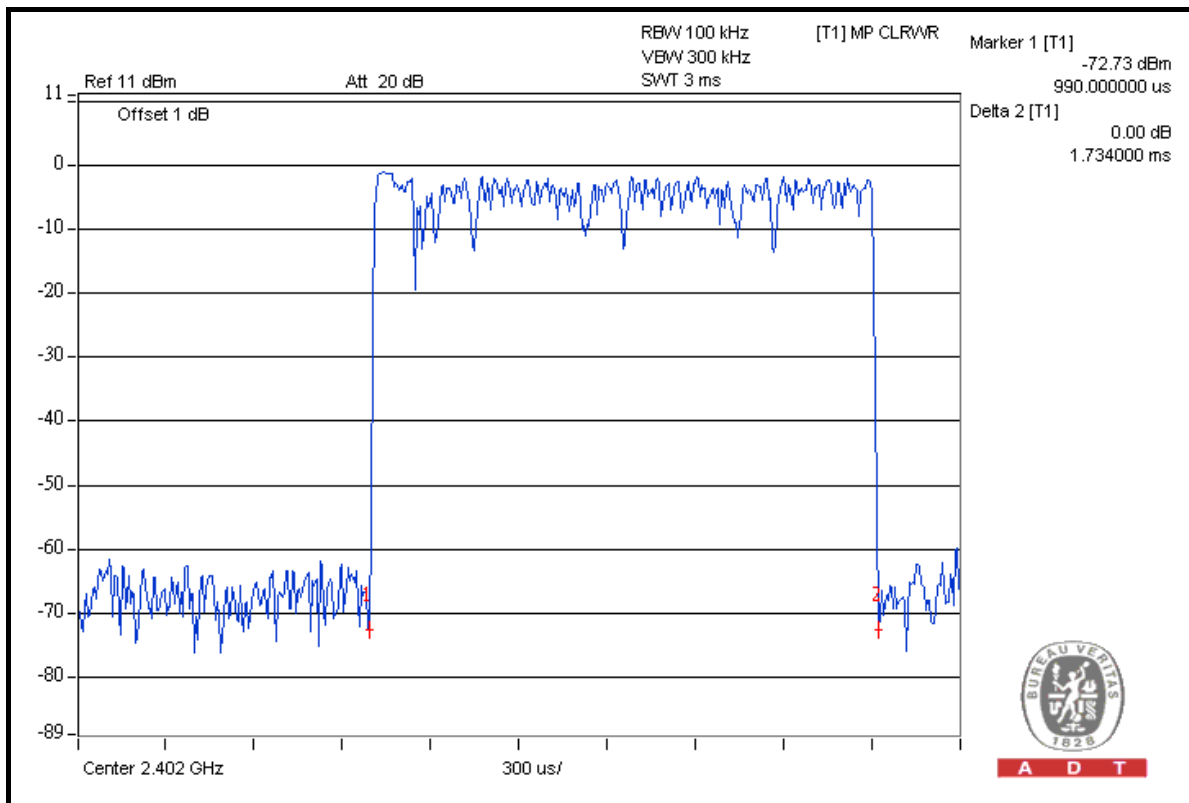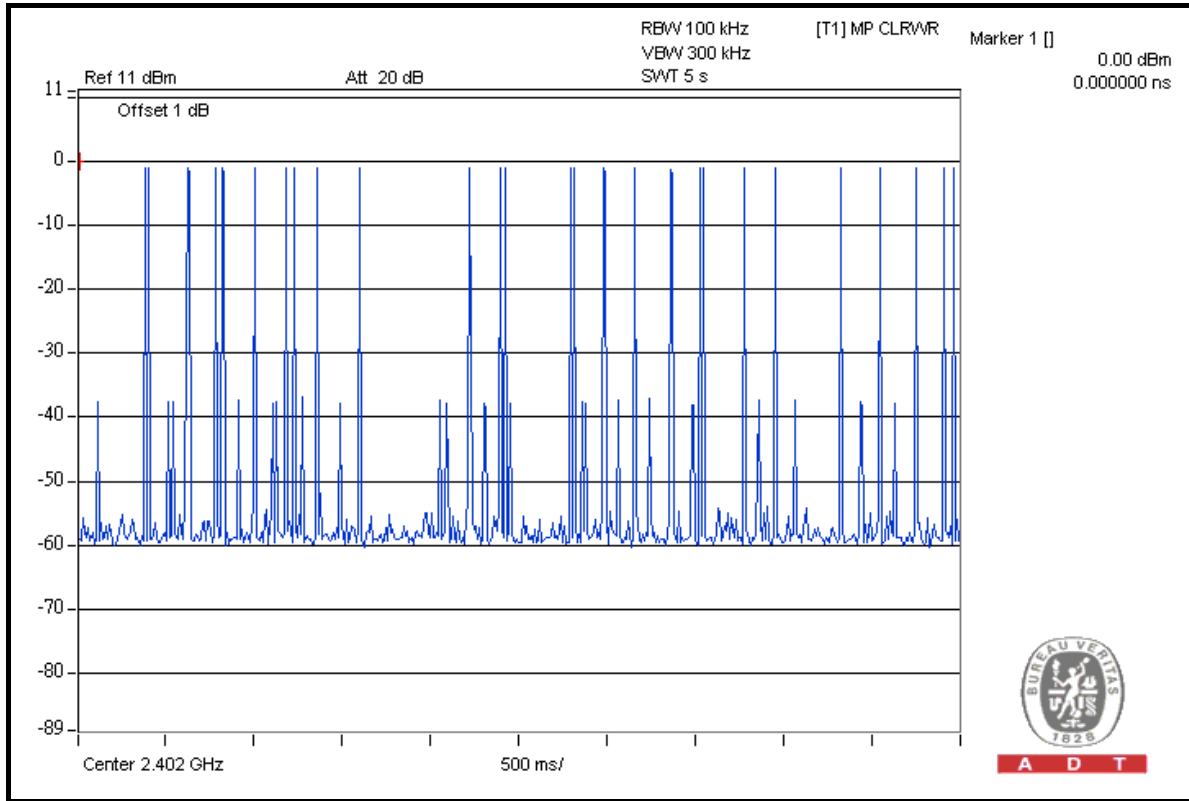



A D T

### DH5

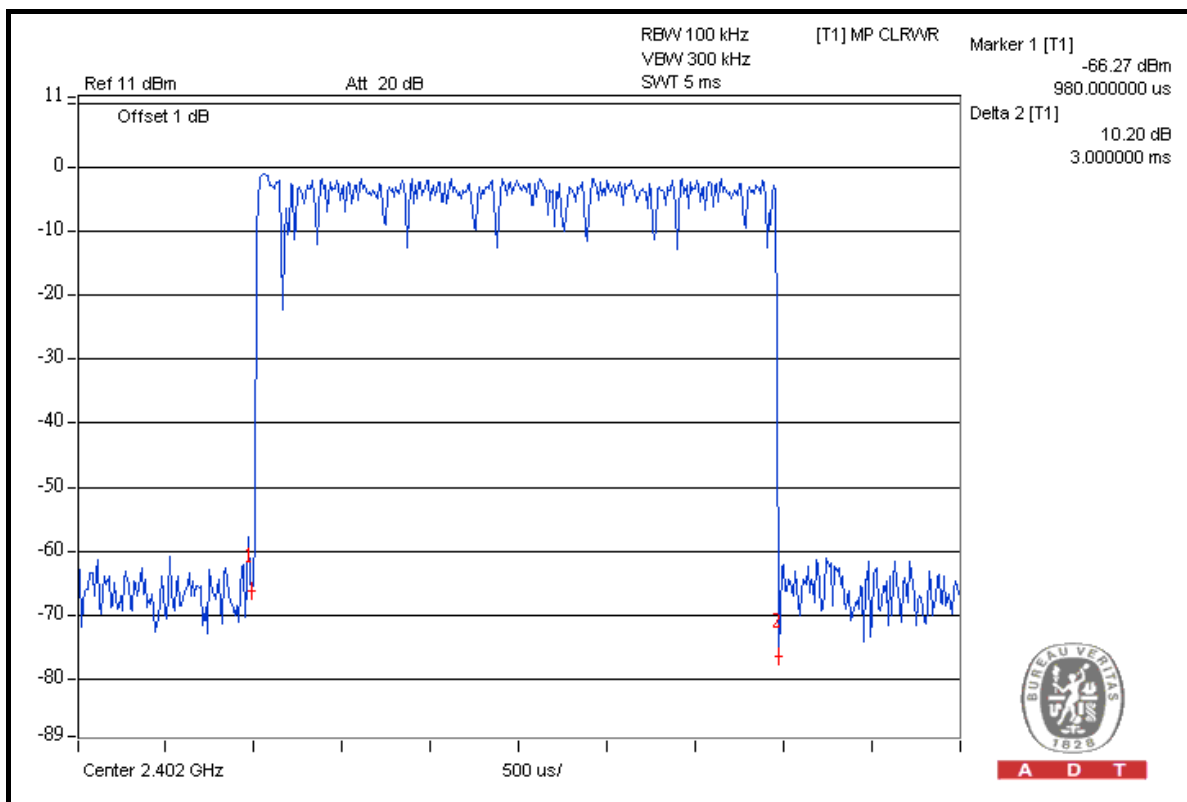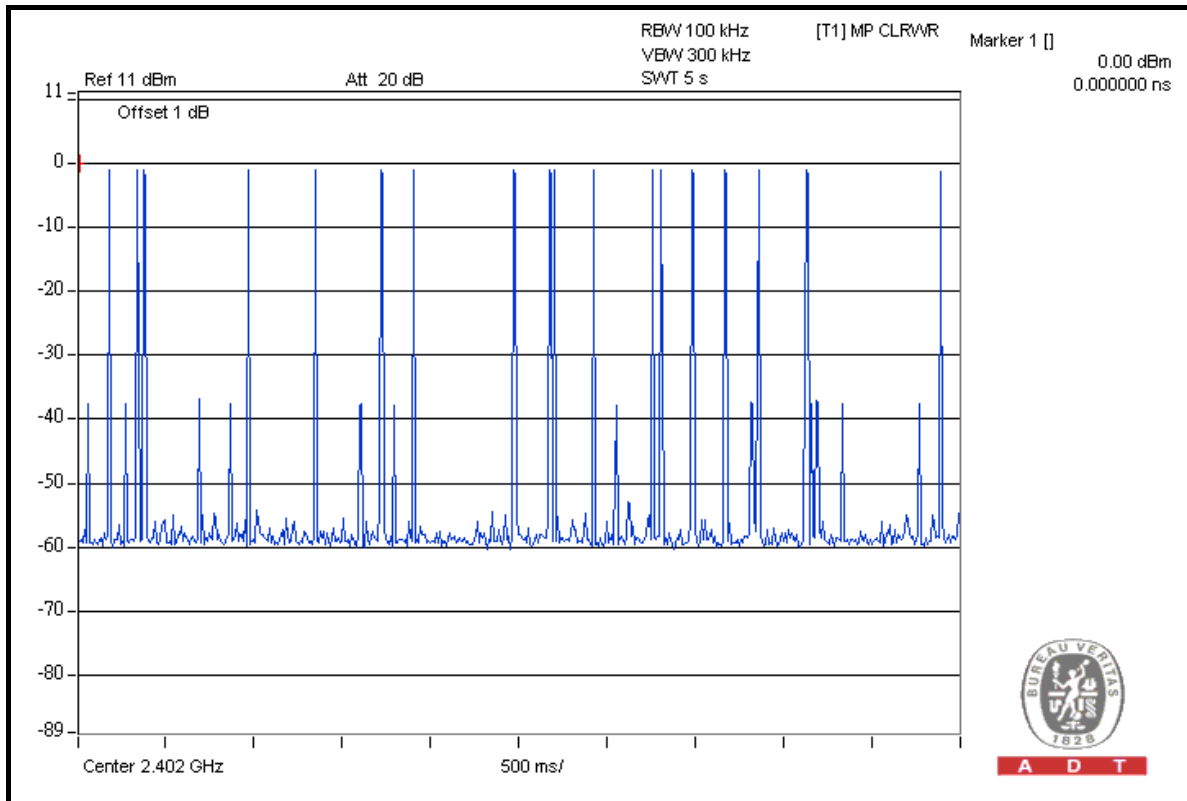


## 4.4 CHANNEL BANDWIDTH

### 4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.4.2 TEST SETUP



### 4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### 4.4.7 TEST RESULTS

#### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.030
39	2441	1.020
78	2480	1.010

#### CH 0

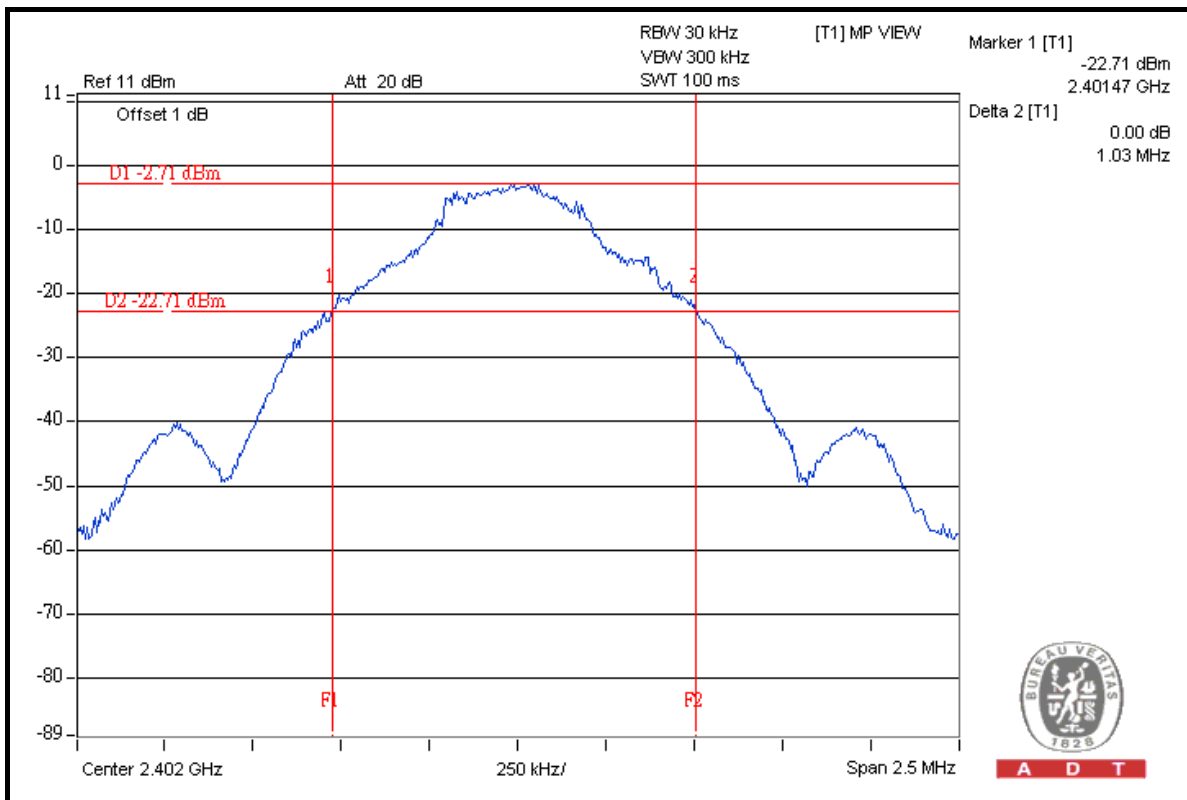


## 4.5 HOPPING CHANNEL SEPARATION

### 4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.




A D T

### 4.5.6 TEST RESULTS

#### GFSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.010	1.030	0.687	PASS
39	2441	1.010	1.020	0.680	PASS
78	2480	1.010	1.010	0.673	PASS

**NOTE:** The minimum limit is two-third 20dB bandwidth.

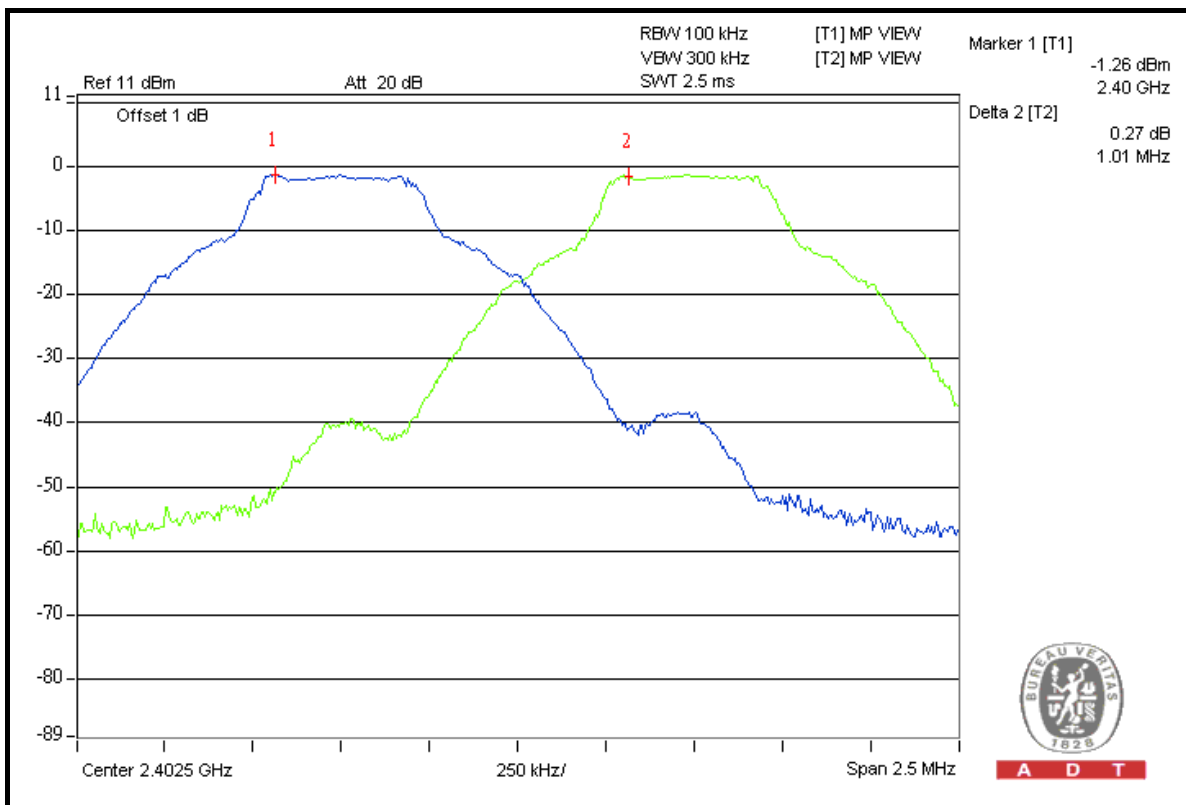




## 4.6 MAXIMUM OUTPUT POWER

### 4.6.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

### 4.6.2 TEST SETUP



### 4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

### 4.6.7 TEST RESULTS

#### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (mW)	PASS/FAIL
0	2402	0.824	-0.84	125	PASS
39	2441	0.847	-0.72	125	PASS
78	2480	0.830	-0.81	125	PASS

#### CH 39

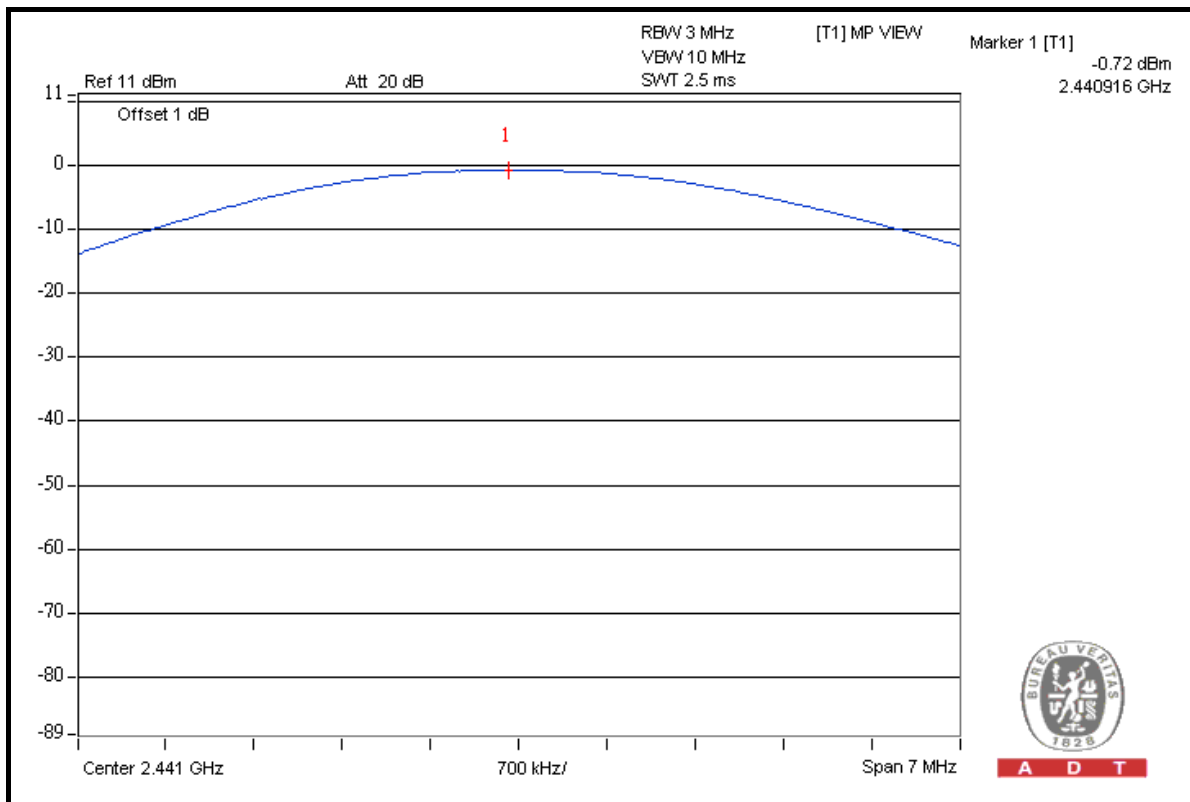

## 4.7 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

### 4.7.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

### 4.7.2 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.7.3 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set VBW =300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.7.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit continuously.



### 4.7.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



A D T



# GFSK Hopping disabled Low Channel

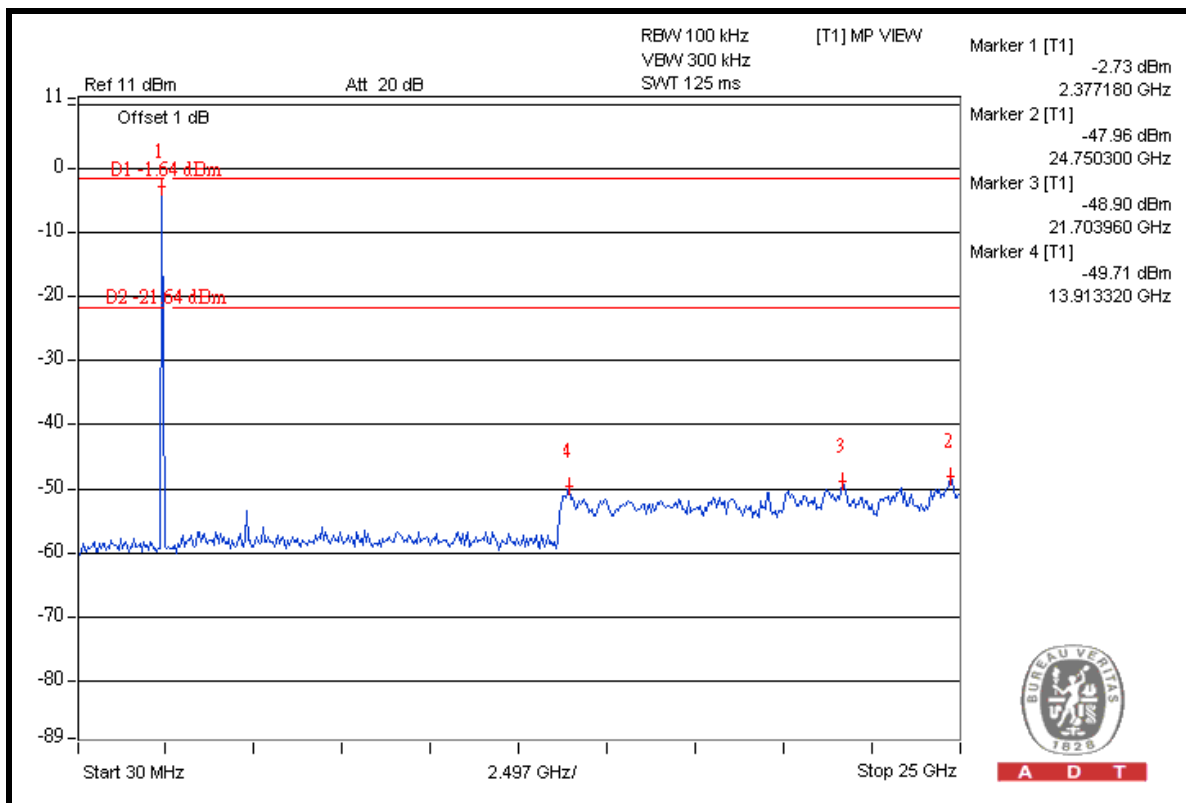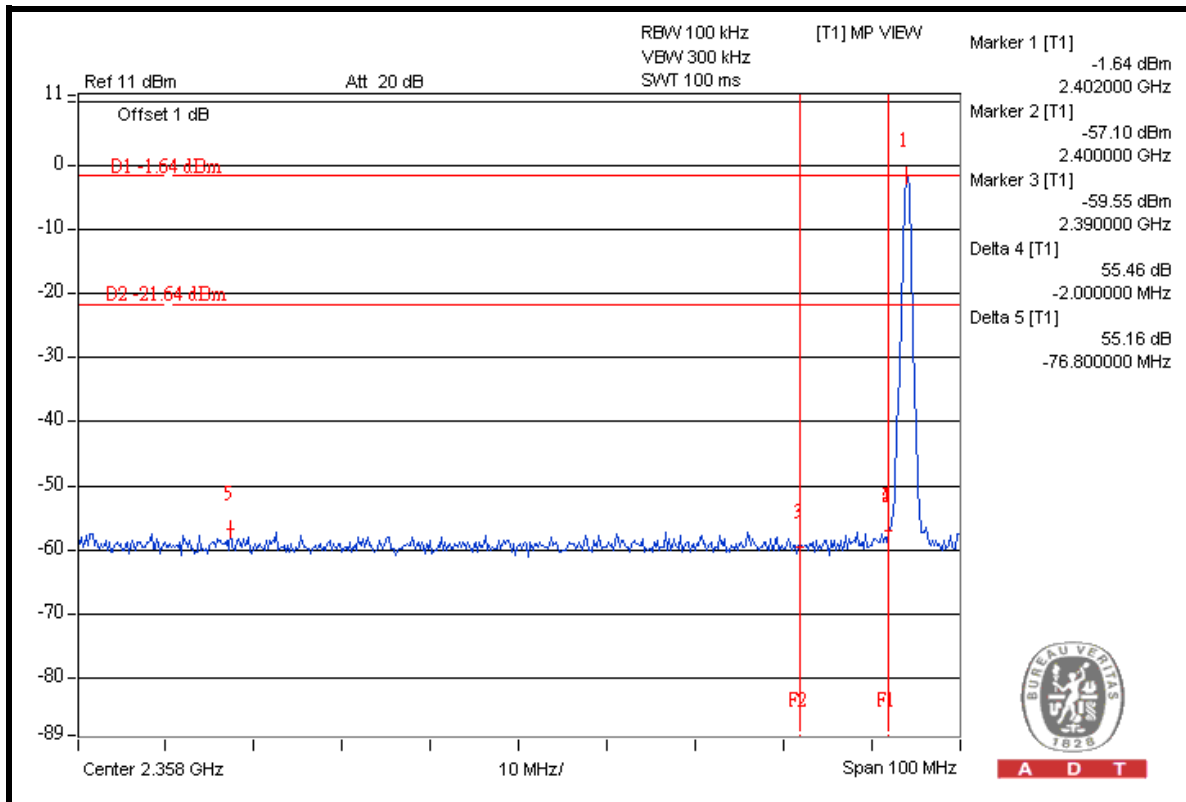



A D T



## Hopping disabled High Channel

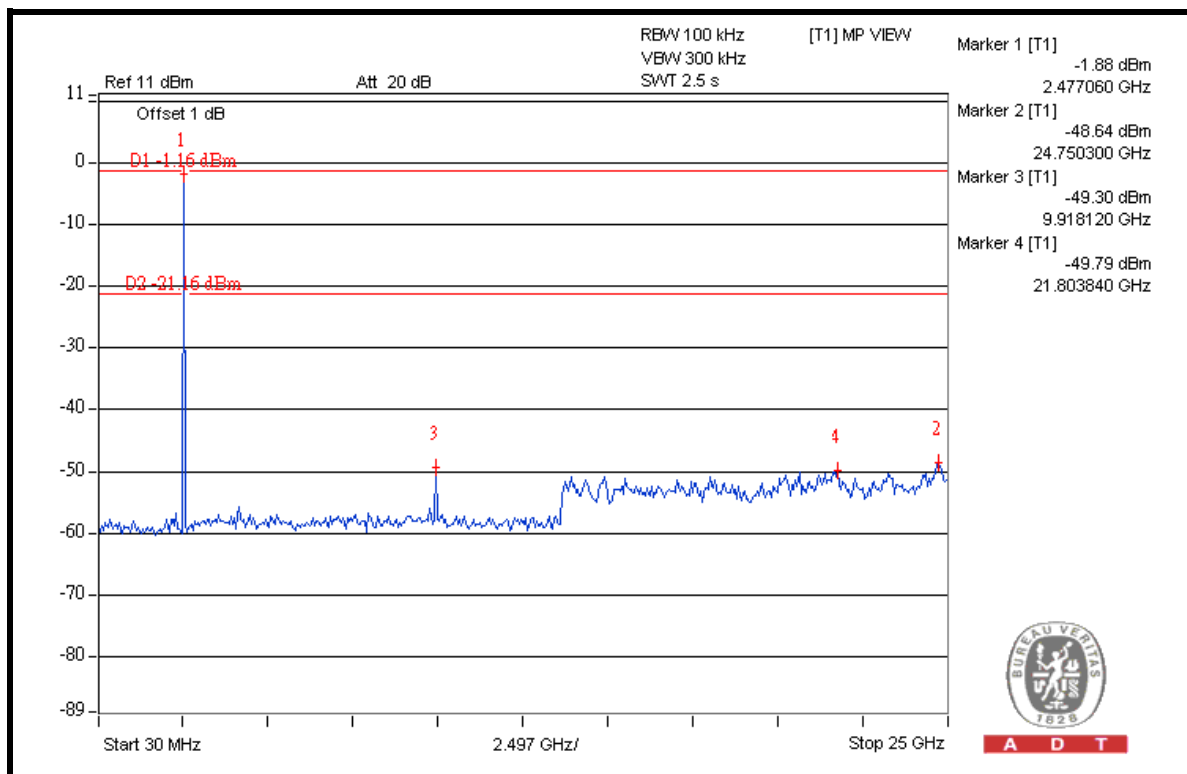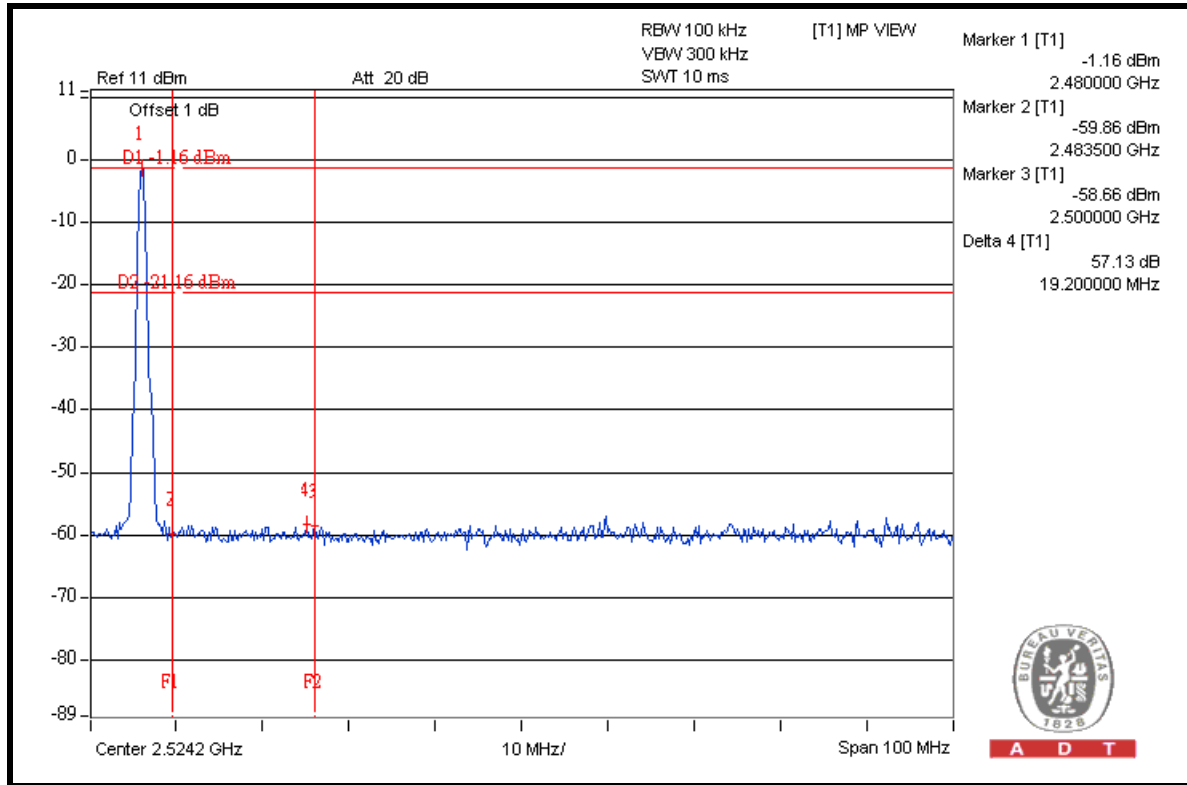



A D T



# Hopping enabled Low Channel

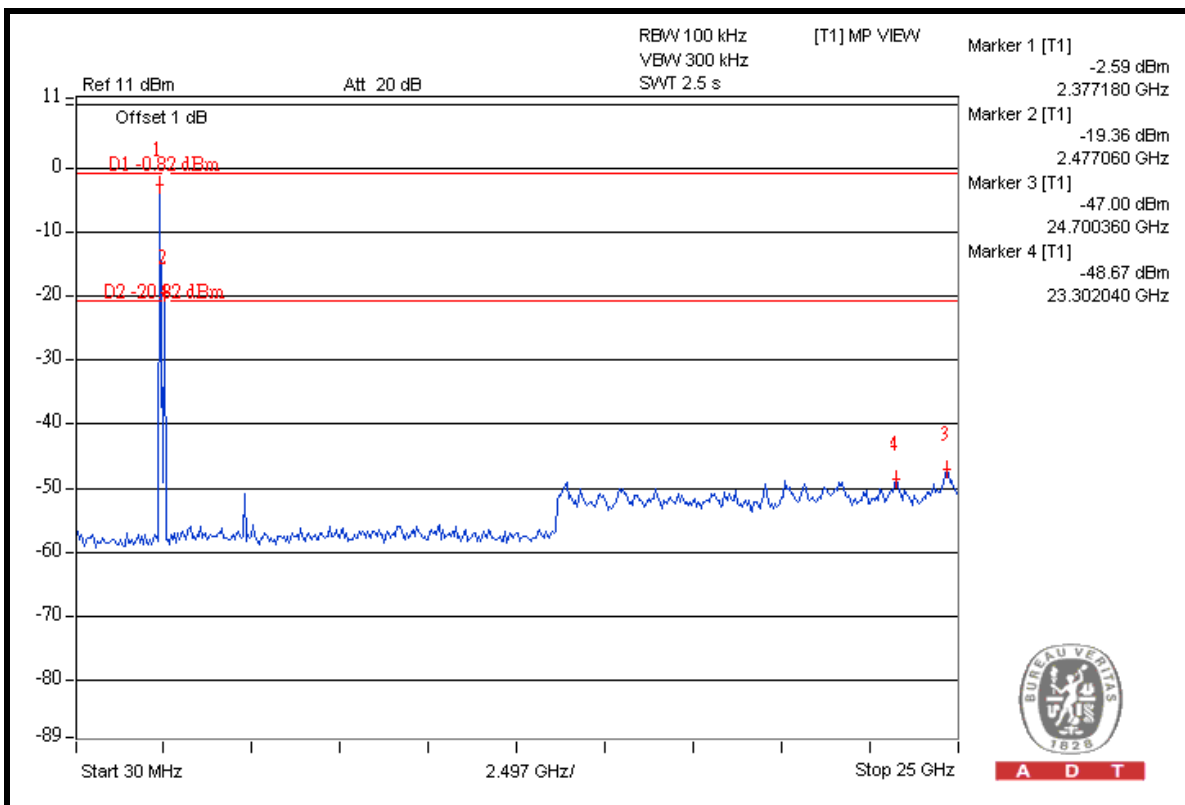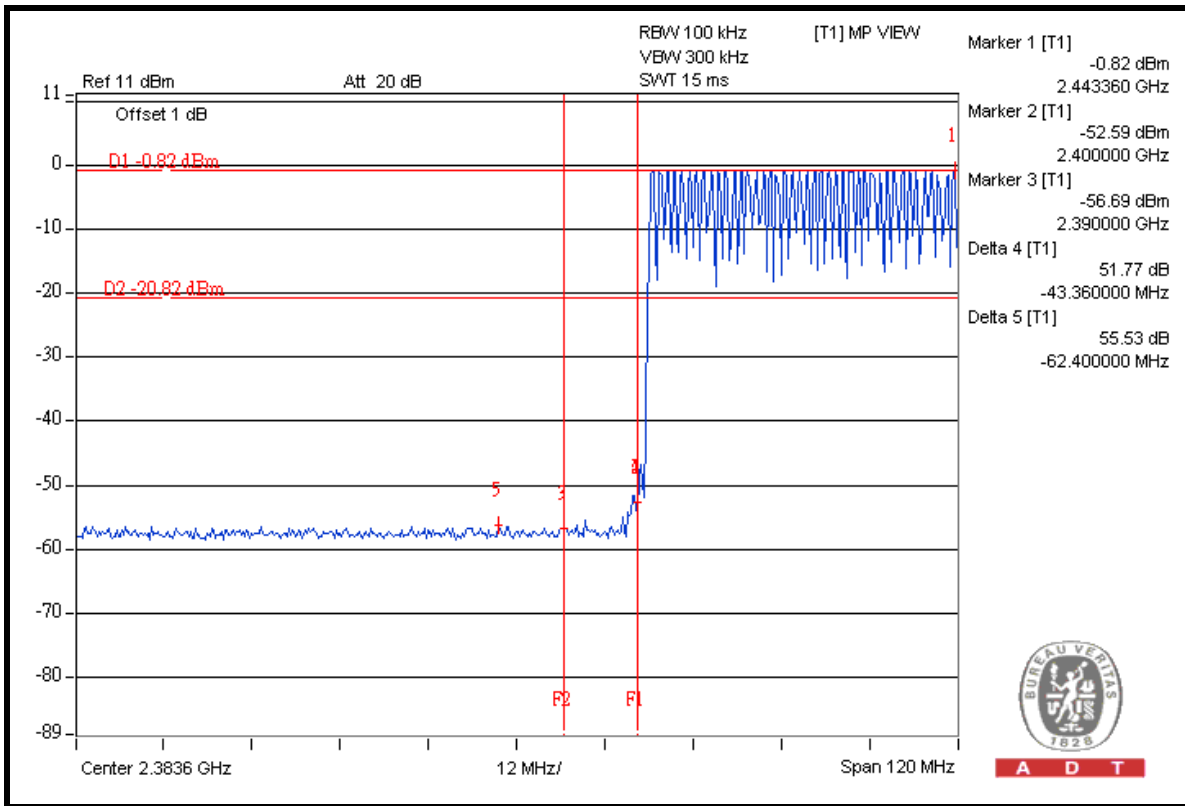



A D T

## Hopping enabled High Channel

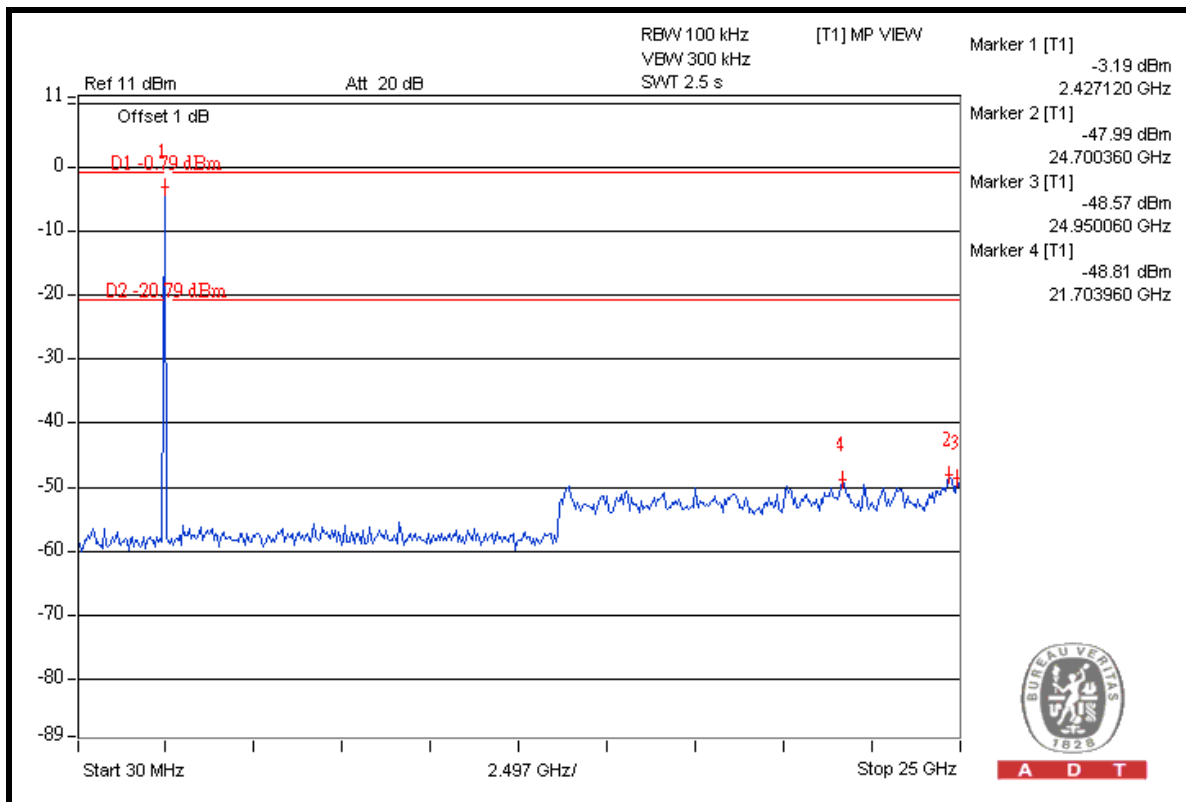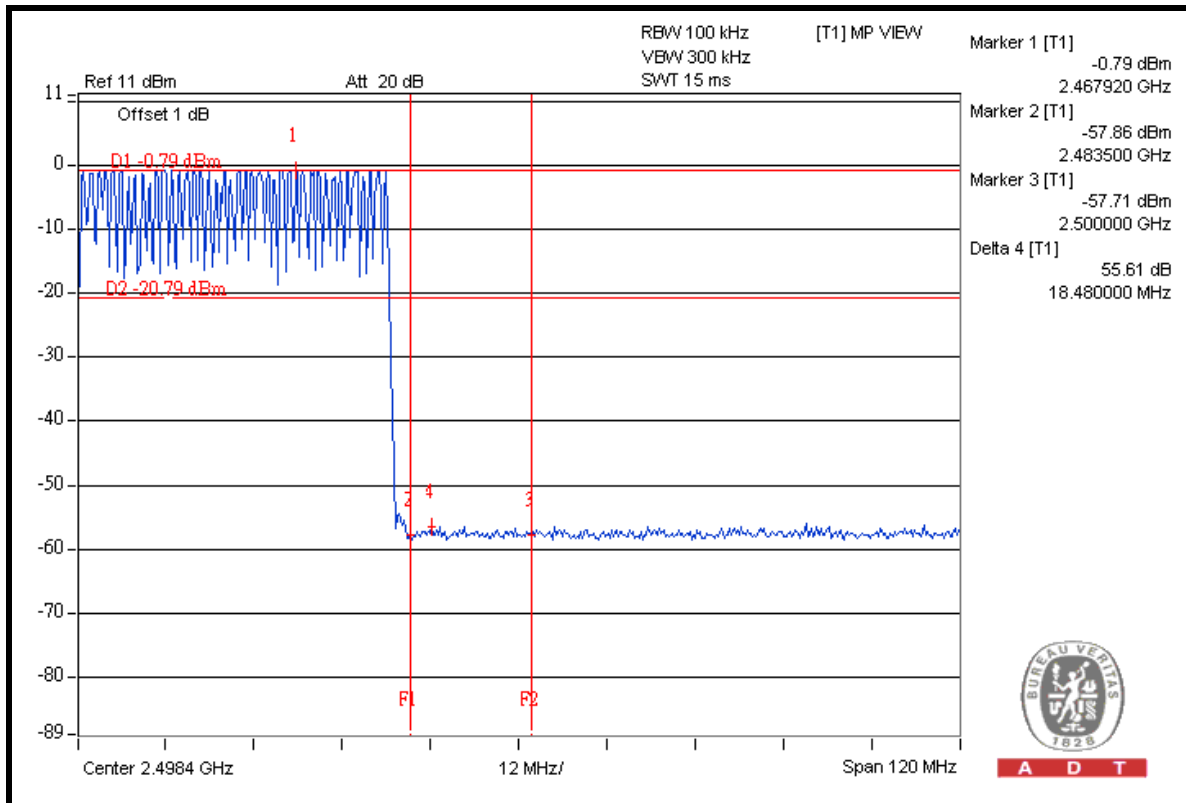

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5.phtml](http://www.adt.com.tw/index.5.phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## **7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**---END---**