



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8
CERTIFICATION TEST REPORT**

FOR

Accessory Wireless Controller

MODEL NUMBER: 1546

**FCC ID: C3K1546
IC: 3048A-1546**

REPORT NUMBER: 12U14344-1, Revision D

ISSUE DATE: June 1, 2012

Prepared for
**MICROSOFT CORPORATION
ONE MICROSOFT WAY
REDMOND, WA 98052, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	05/10/12	Initial Issue	T.LEE
A	05/29/12	Added Duty Cycle	T. LEE
B	05/29/12	Updated report to maintain product confidentiality	A. Zaffar
C	06/01/12	Corrected Duty Cycle	T. LEE
D	06/01/12	Corrected Harmonic with Duty Cycle	T. LEE

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.6. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1.1. 20 dB AND 99% BANDWIDTH	11
7.1.2. HOPPING FREQUENCY SEPARATION	18
7.1.3. NUMBER OF HOPPING CHANNELS	20
7.1.4. AVERAGE TIME OF OCCUPANCY	24
7.1.5. OUTPUT POWER	27
7.1.6. AVERAGE POWER	31
7.1.7. CONDUCTED SPURIOUS EMISSIONS	32
7.1.8. DUTY CYCLE	41
8. RADIATED TEST RESULTS	42
<i>LIMITS AND PROCEDURE</i>	42
8.1. <i>Standard Non-metallic Enclosure</i>	43
8.1.1. TRANSMITTER ABOVE 1 GHz	43
8.1.2. WORST-CASE BELOW 1 GHz	50
8.2. <i>Metallic Artwork Enclosure</i>	53
8.2.1. TRANSMITTER ABOVE 1 GHz	53
8.2.2. WORST-CASE BELOW 1 GHz	60
9. MAXIMUM PERMISSIBLE EXPOSURE	63
10. SETUP PHOTOS	66

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MICROSOFT CORPORATION
ONE MICROSOFT WAY
REDMOND, WA 98052 U.S.A.

EUT DESCRIPTION: Accessory Wireless Controller

MODEL: 1546

SERIAL NUMBER: Standard Non-metallic Enclosure:
EV2 103(Conducted) & EV2 229(Radiated)
Metallic Artwork Enclosure: EV2B(Radiated)

DATE TESTED: April 18 – May 10, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	PASS
INDUSTRY CANADA RSS-GEN Issue 3	PASS

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



TIMOTHY K. LEE
STAFF ENGINEER
UL CCS

VIEN TRAN / DENNIS HUANG
EMC TECHNICIAN / ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a frequency hopping transceiver host. EUT is using the proprietary communication protocol to interact with a console. Proprietary communication protocol is detailed in the theory of operation.

The radio module is manufactured by Microsoft, Model 1546.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Output Power (dBm)	Output Power (mW)
2402 - 2482	3.80	2.40

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an inverted-F antenna, which is soldered to the printed circuit board. This antenna has a maximum gain of -0.2 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Radon EEPROM, rev. 0410 for Normal Plastic Cover and Radon EEPROM, rev. 0452 for Metallic Cover.

The EUT driver software installed in the host laptop support equipment during testing was FPM Driver, rev. 8.1.0.0.

The test utility software used during testing was Wireless Device Test Ver. 113 and ACCUsbtUartTestTool Ver. 1-21-2012. Product firmware version: 4.10

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2442 MHz.

The EUT is a portable device that has three orientations; therefore X, Y, and Z orientations have been investigated. The worst case was found to be Y orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	L420	LR-78PNB	DoC
AC Adaptor	Lenovo	42T4418	11S42T14418ZiZGW13PA94	DoC
USB Jump cable	Microsoft	EV3C-0007	6/24/2005	N/A
Interface Cable and PCB	Boron	MCS015	EV2C-IB039	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identic Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	0.9m	none
2	DC	1	DC	Shielded	1.8m	Ferrite
3	USB	1	I/O	Shielded	0.5m	none
4	USB	1	I/O	Shielded	2.8m	Ferrite

TEST SETUP

The EUT is tested as stand-alone unit.

SETUP DIAGRAM FOR TESTS

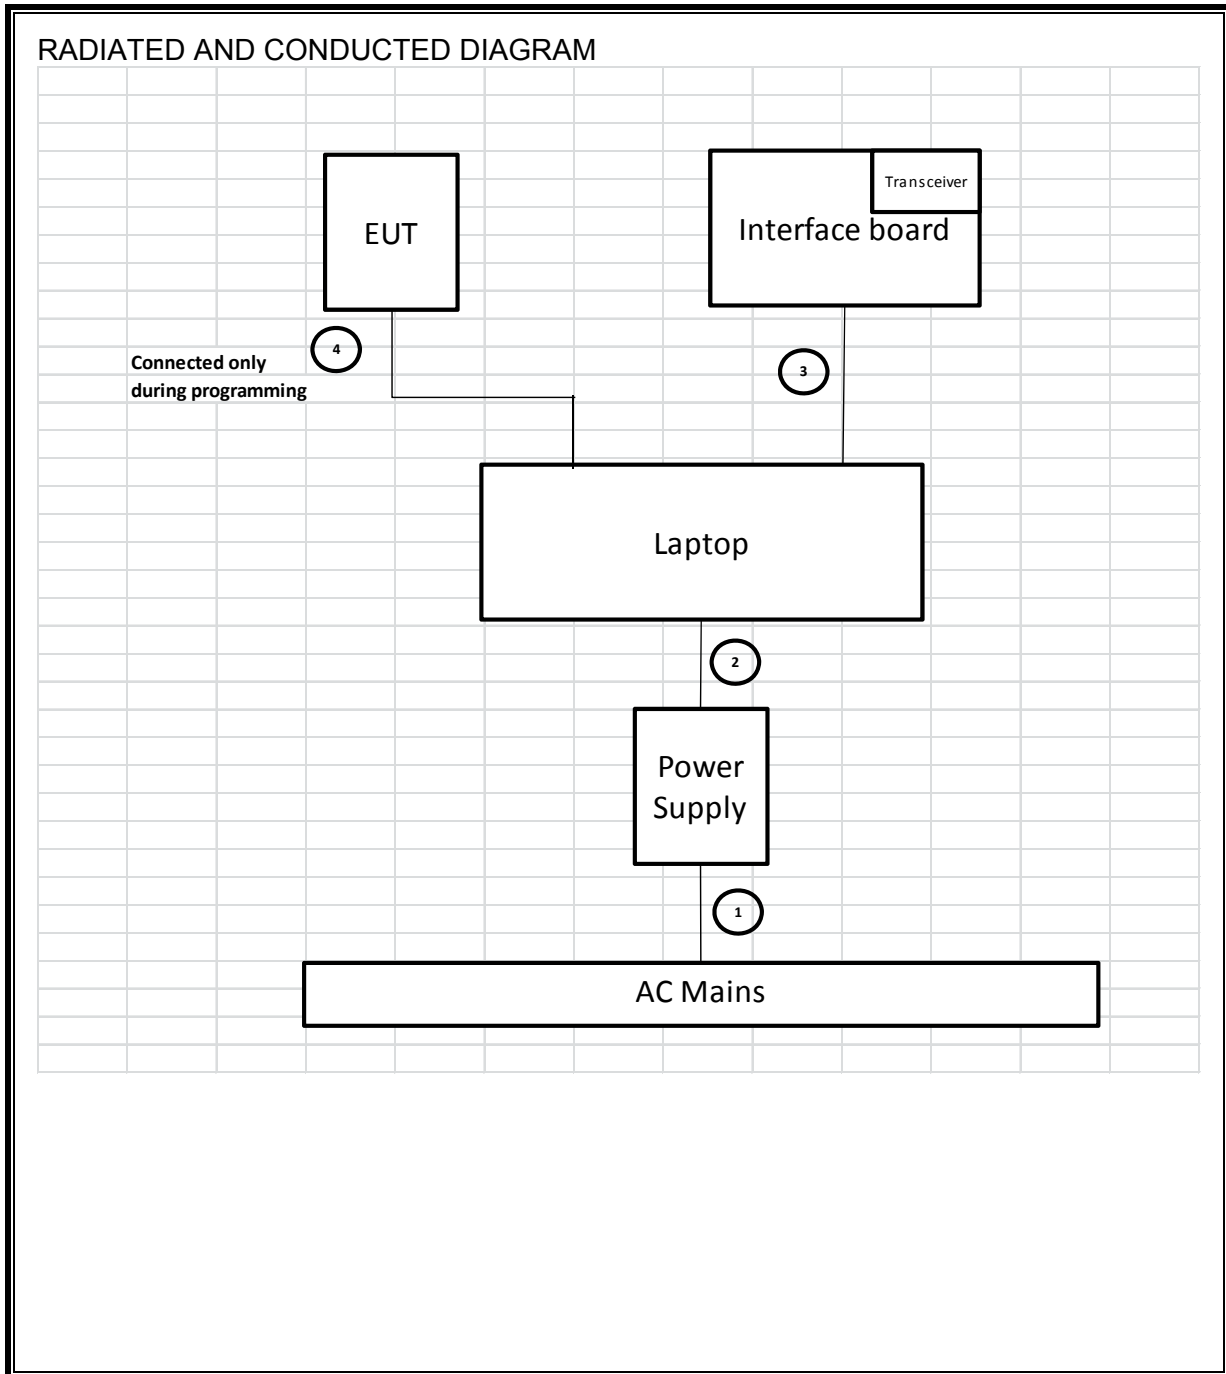

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/11	12/13/13
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00996	05/04/11	05/04/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	09/20/11	09/20/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	07/18/11	07/18/12
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	09/02/11	09/02/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	11/11/11	11/11/12
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	01/26/12	01/26/13

7. ANTENNA PORT TEST RESULTS

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1404	1265
Middle	2442	1405	1290.7
High	2482	1403	1361


20 dB BANDWIDTH

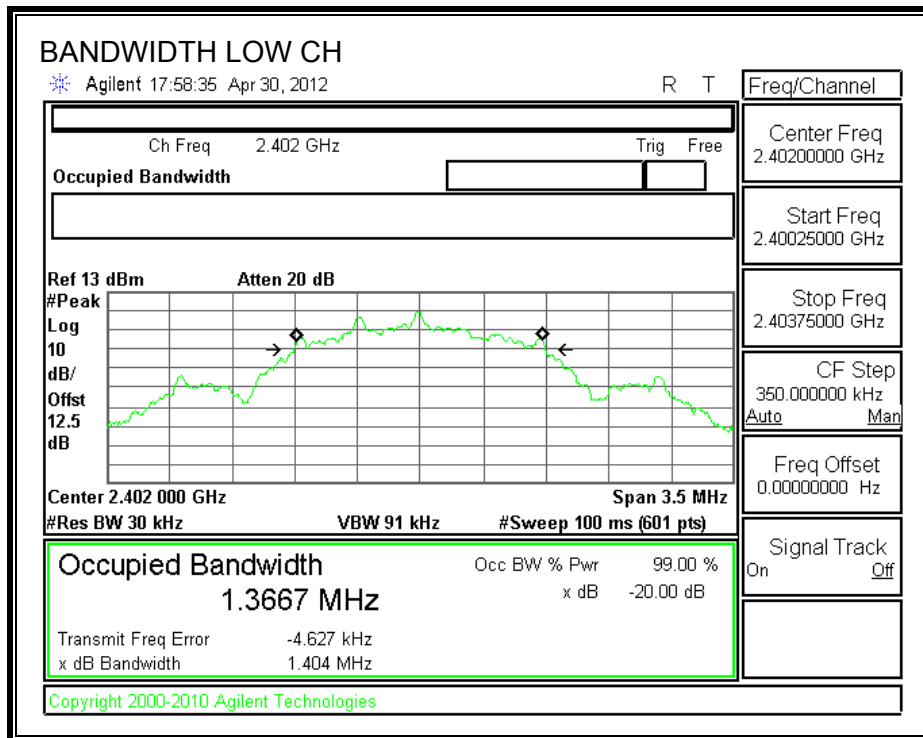


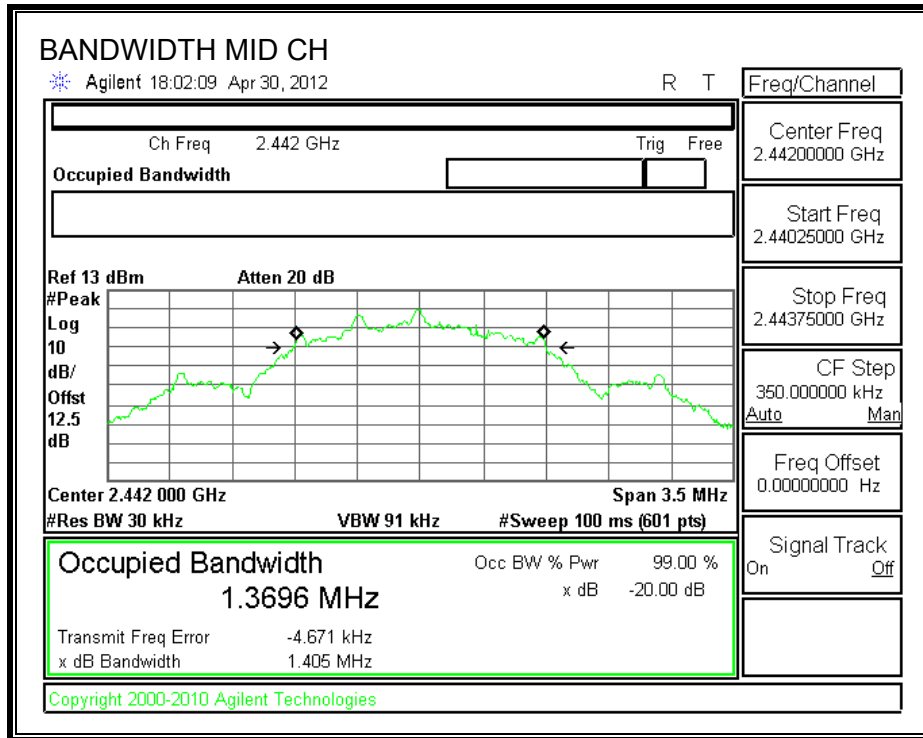


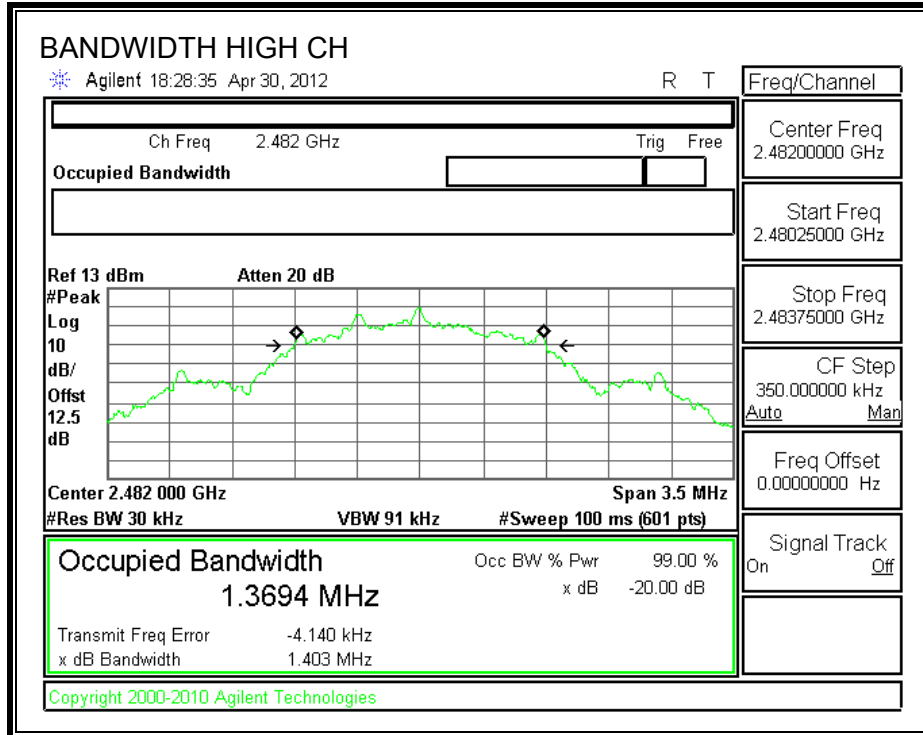

99% BANDWIDTH

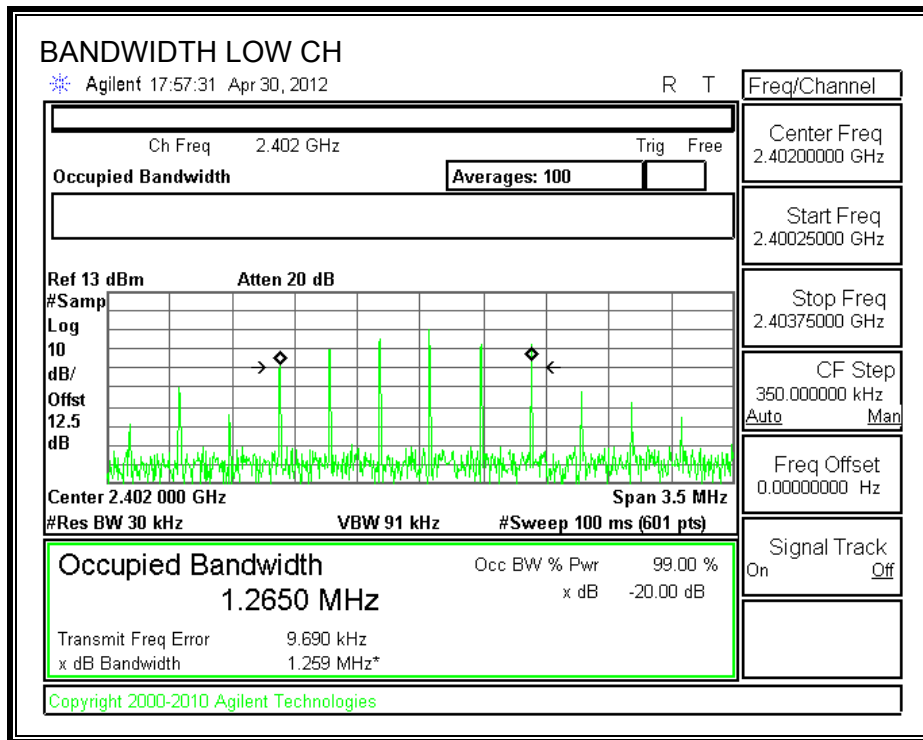

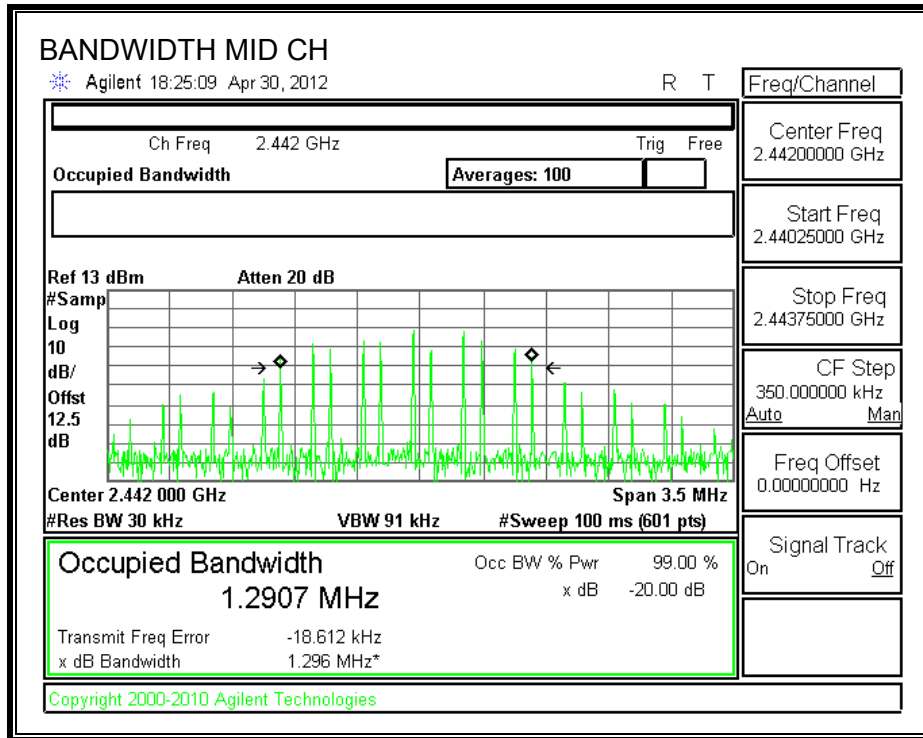

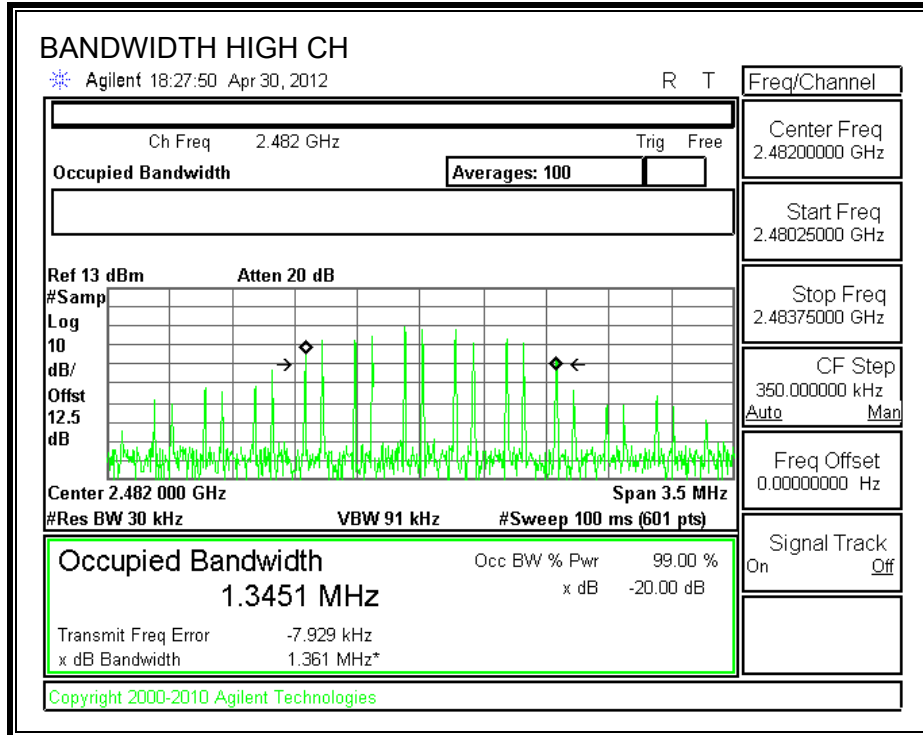

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

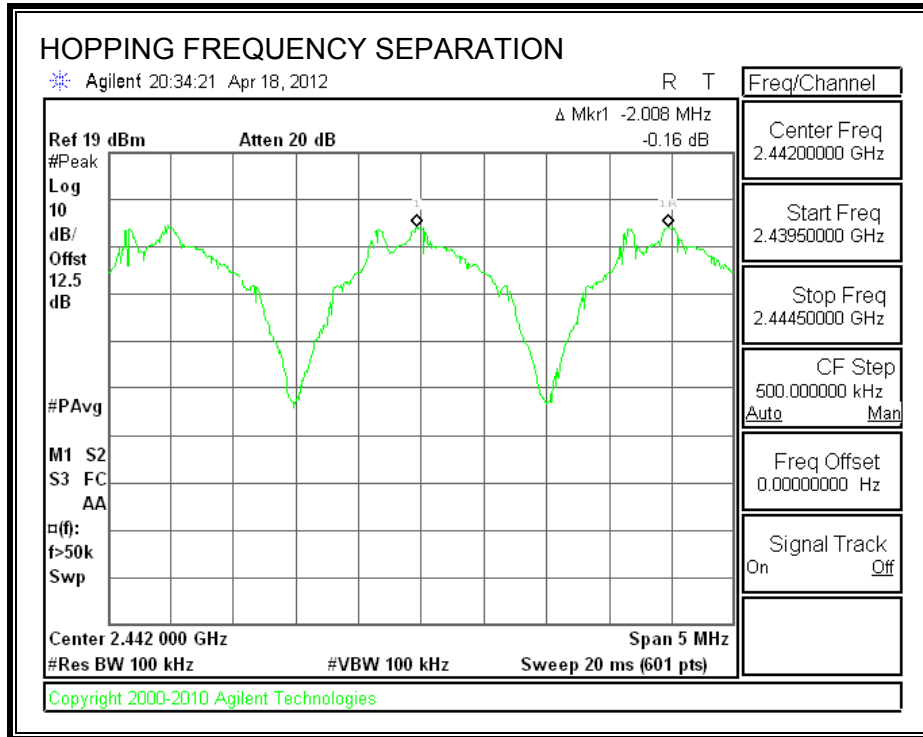

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

41 Channels observed.

NUMBER OF HOPPING CHANNELS

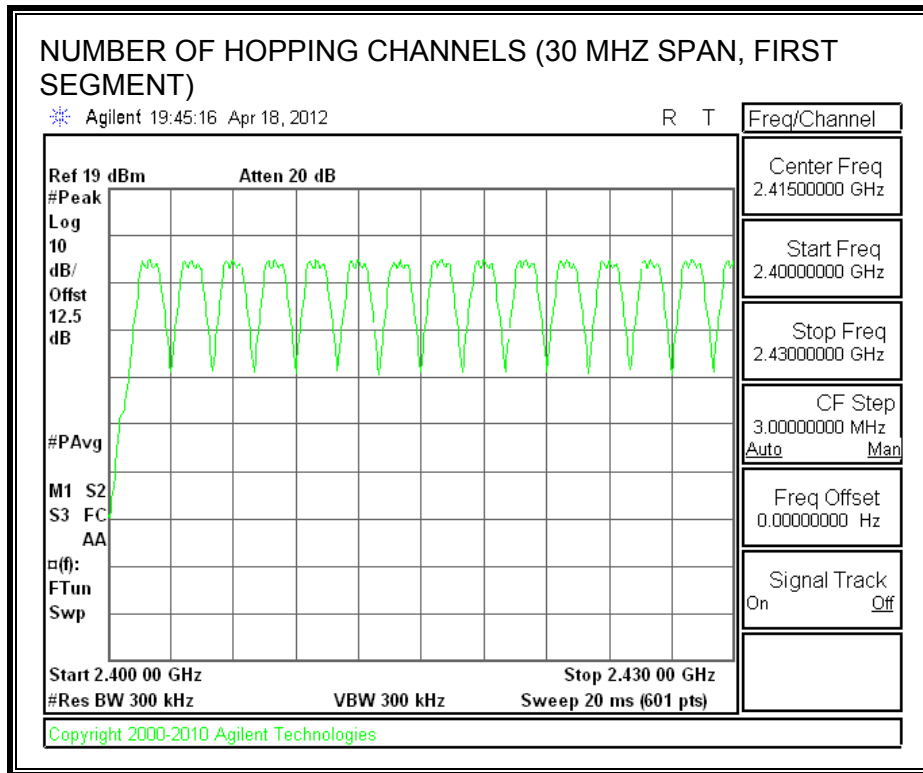

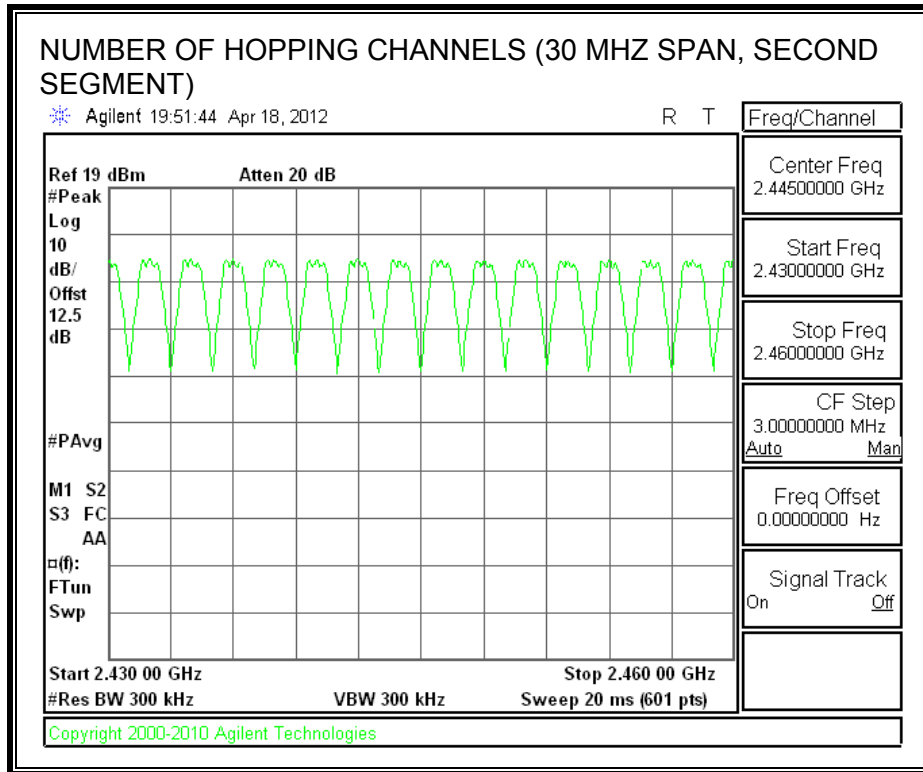

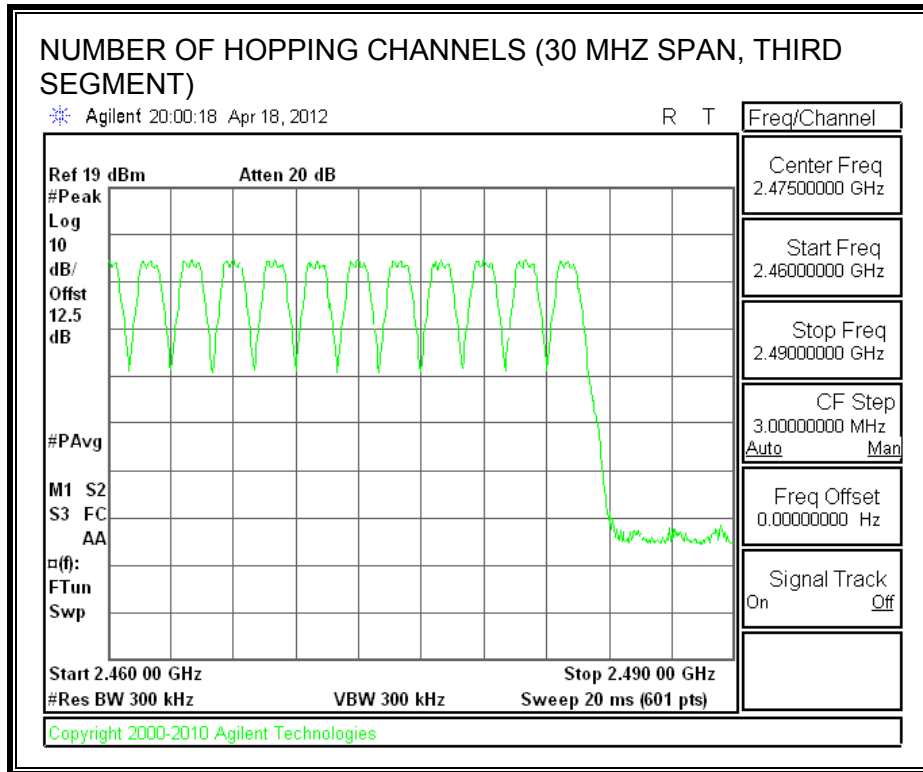

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 1.64 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 16.4 second period (41 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 1.64 \text{ s}) * \text{ pulse width}$.

RESULTS


Time Of Occupancy = $10 * 21 \text{ pulses} * 0.2633 \text{ msec} = 55 \text{ msec}$

Pulse Width (msec)	Number of Pulses in 1.64 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
0.2633	21	0.055	0.4	-0.345

PULSE WIDTH

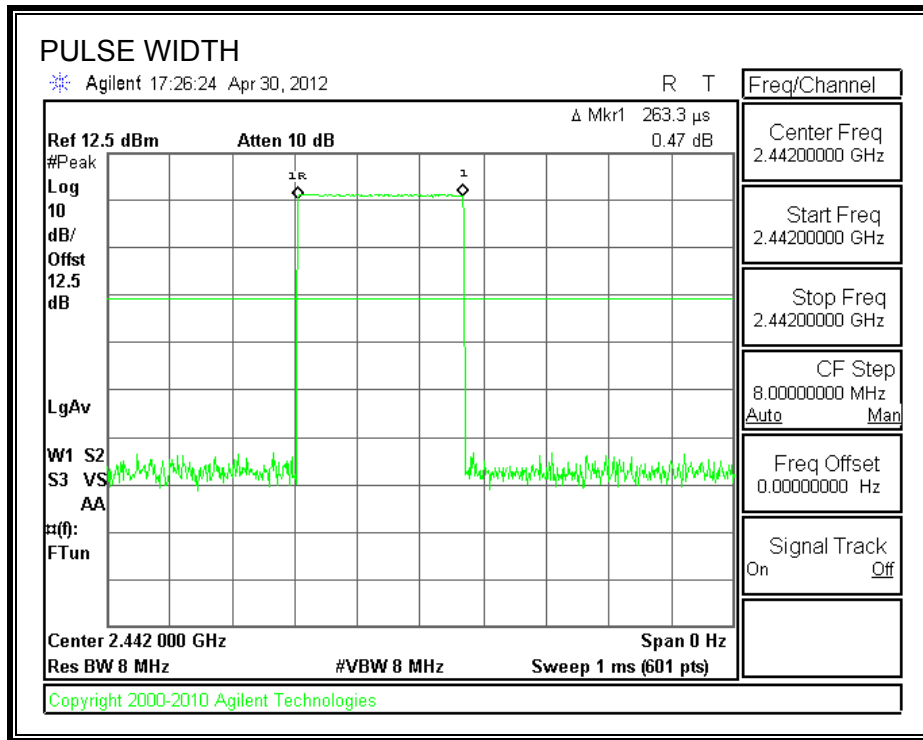

NUMBER OF PULSES IN 1.64 SECOND OBSERVATION PERIOD

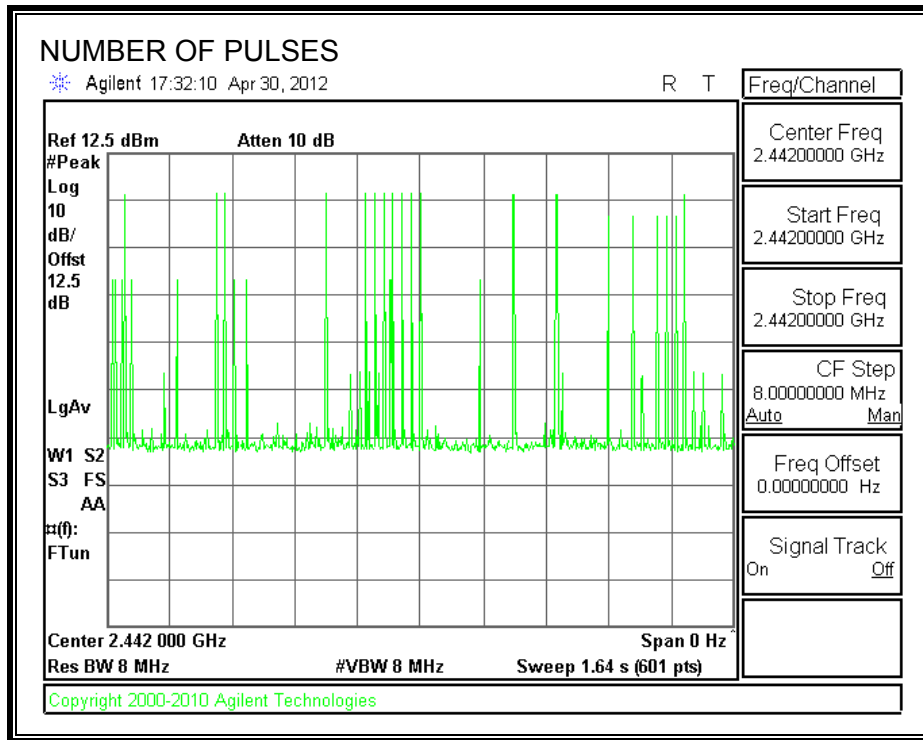

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.80	30	-26.20
Middle	2442	3.78	30	-26.22
High	2482	3.53	30	-26.47

OUTPUT POWER

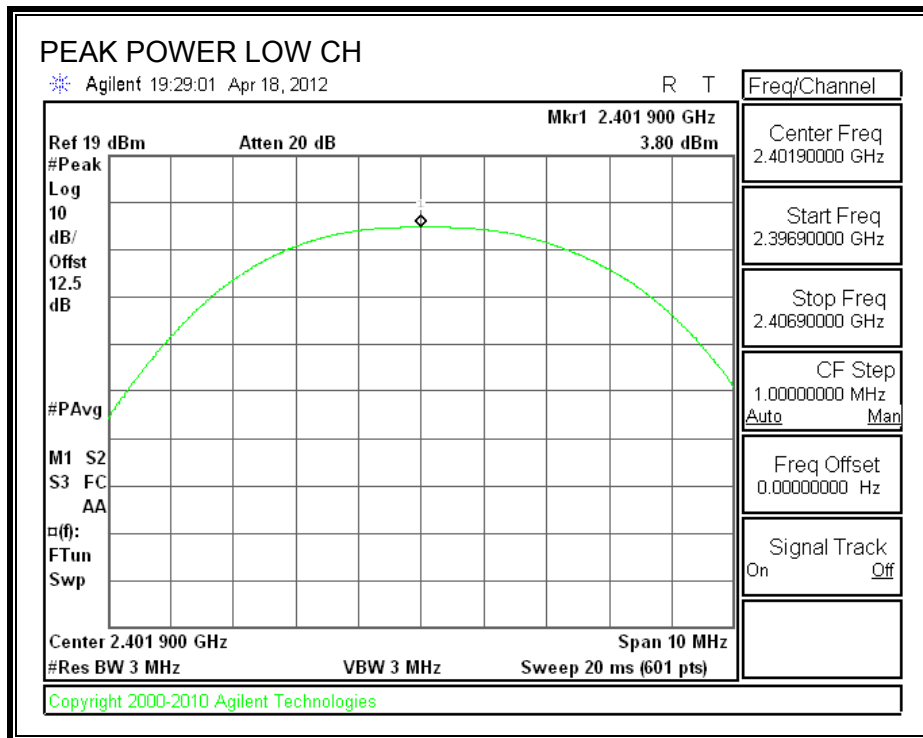

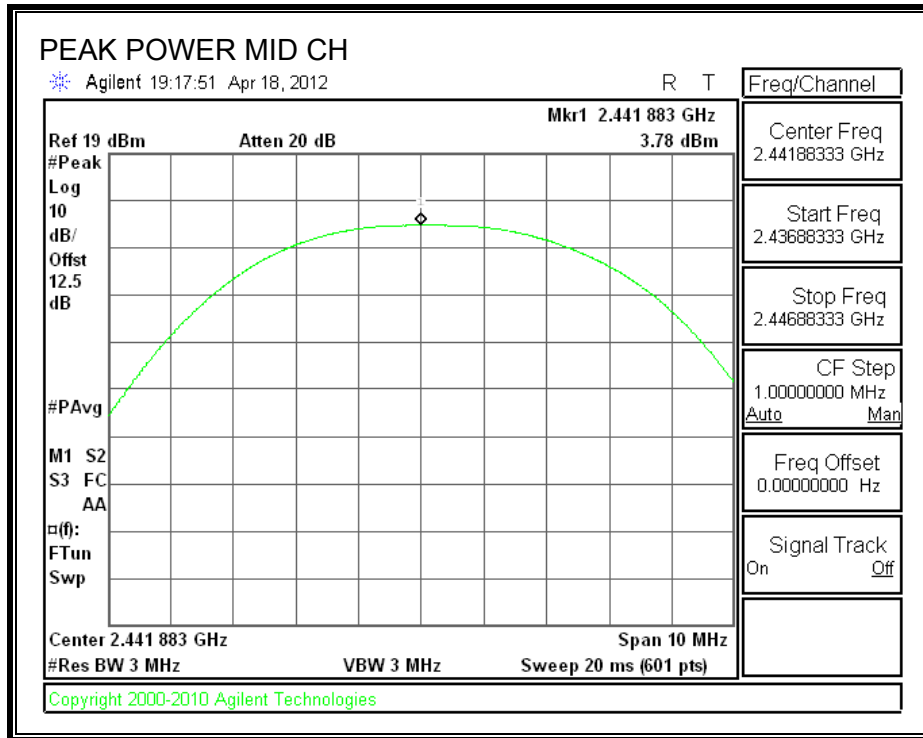

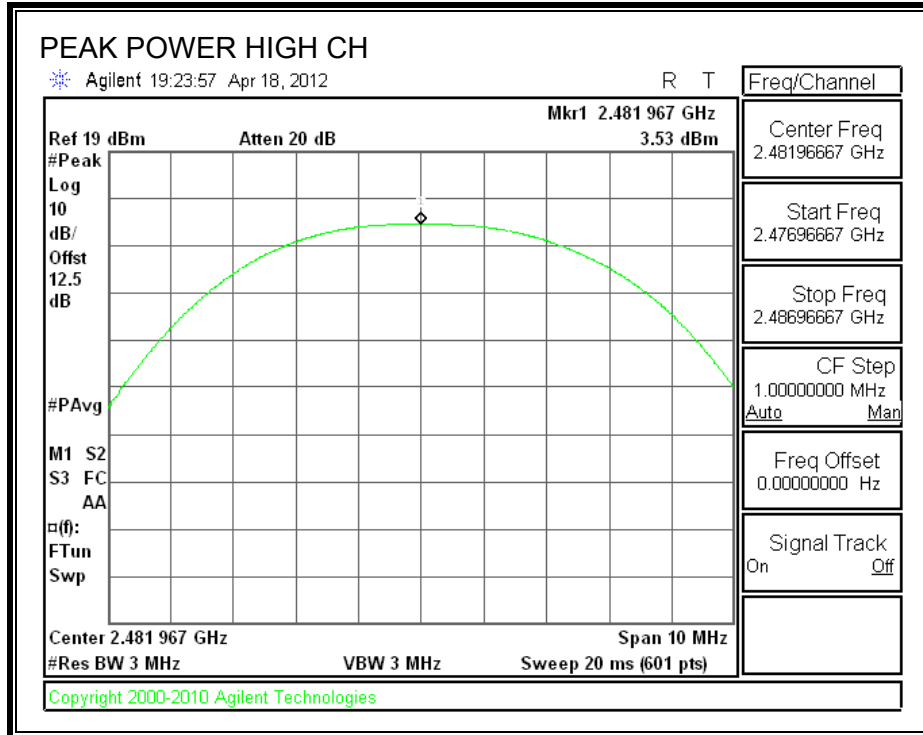

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 12.5 dB (including 2.5 dB cable loss) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-10.98
Middle	2442	-10.71
High	2482	-11.18

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

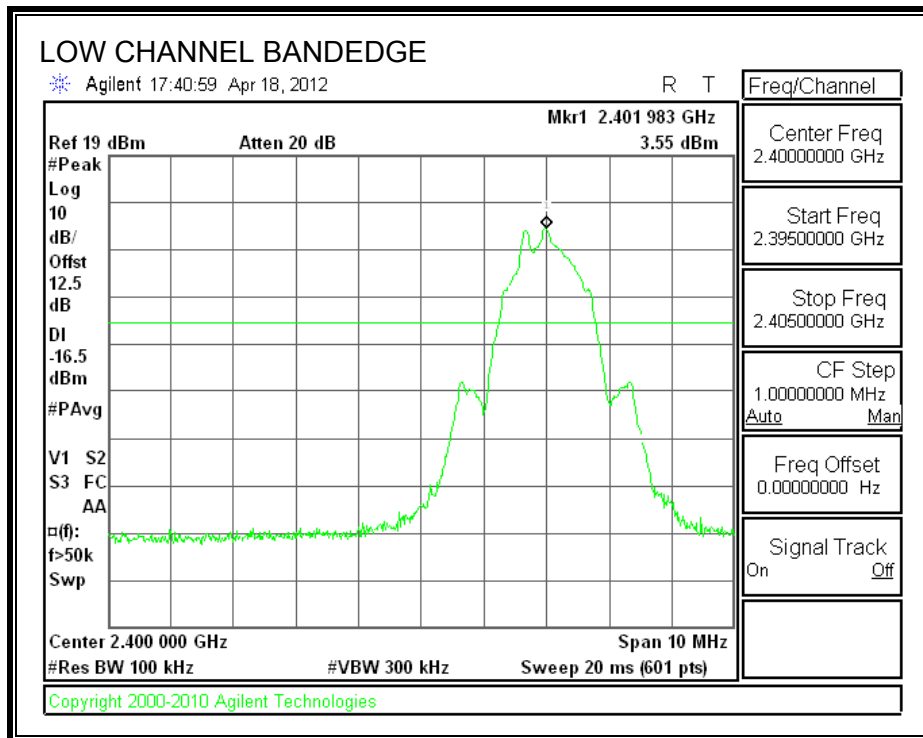

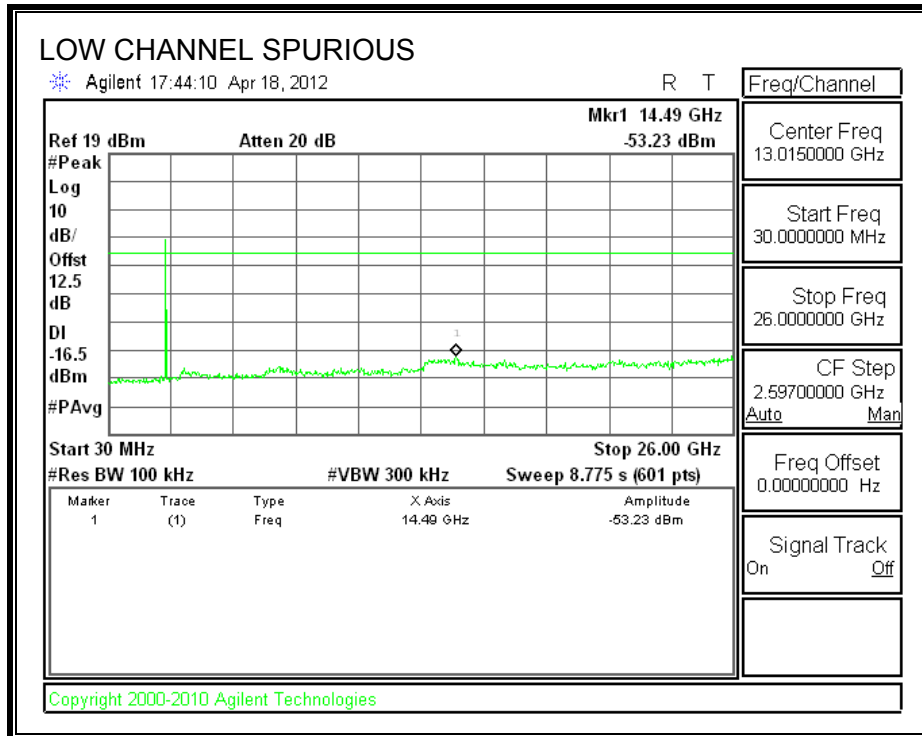



SPURIOUS EMISSIONS, MID CHANNEL

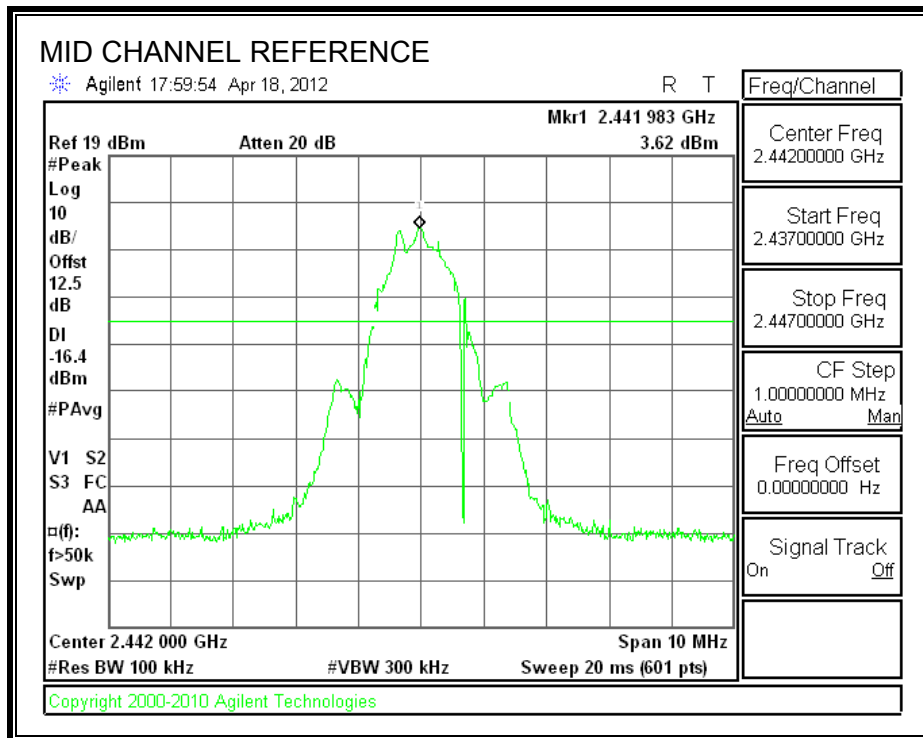

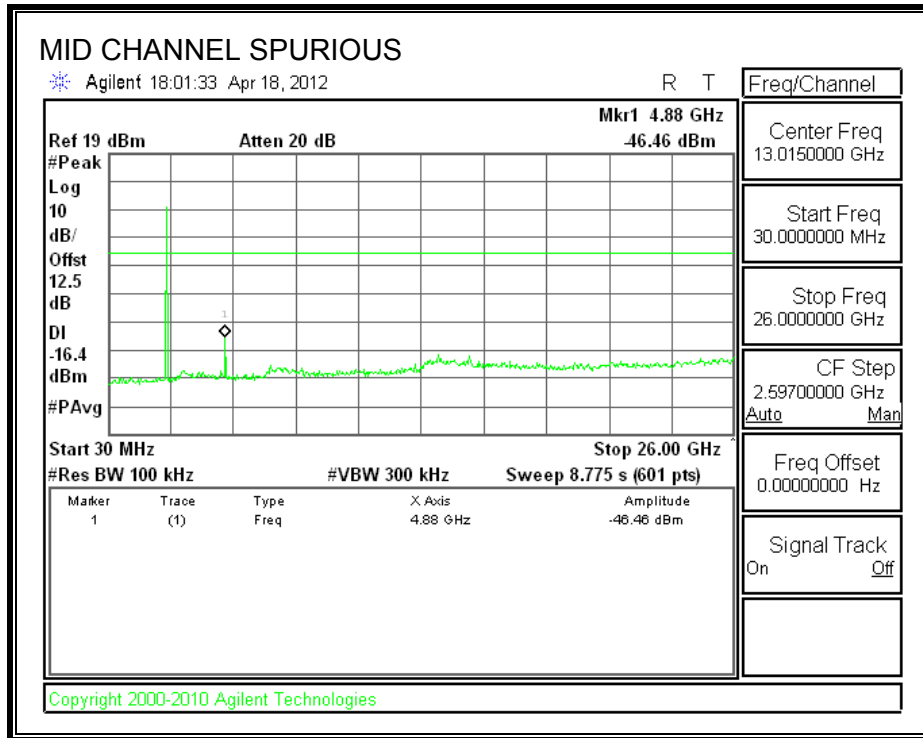



SPURIOUS EMISSIONS, HIGH CHANNEL

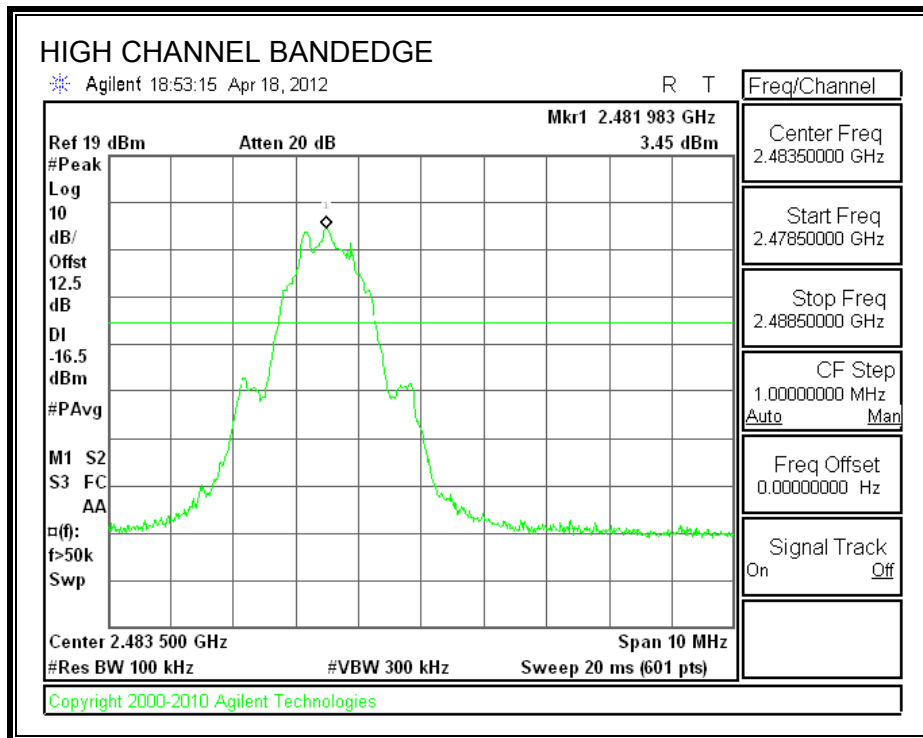

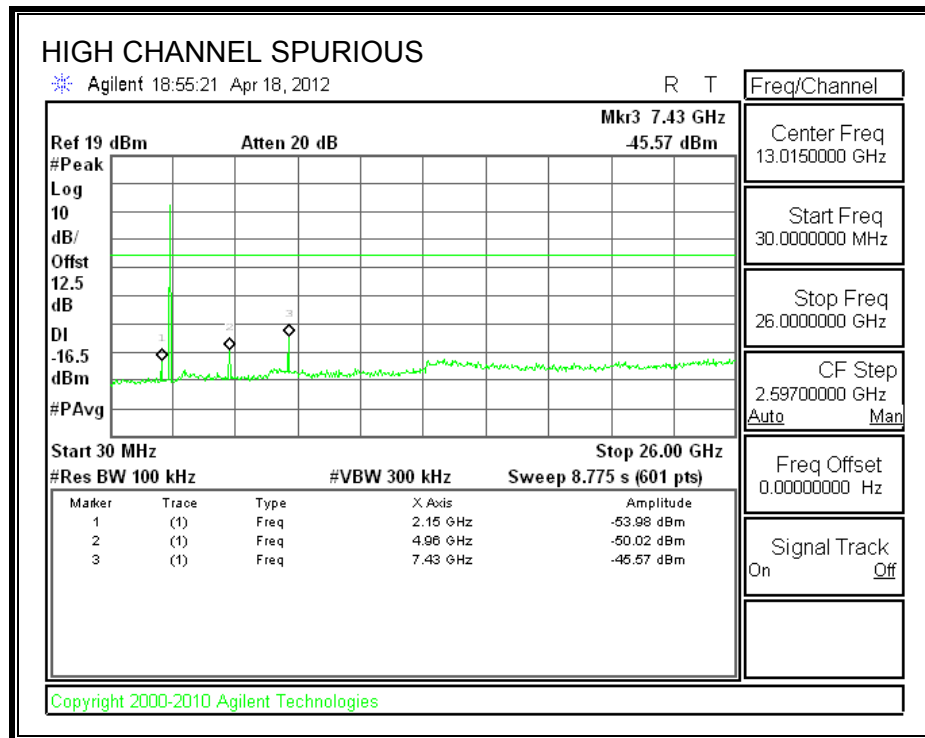

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

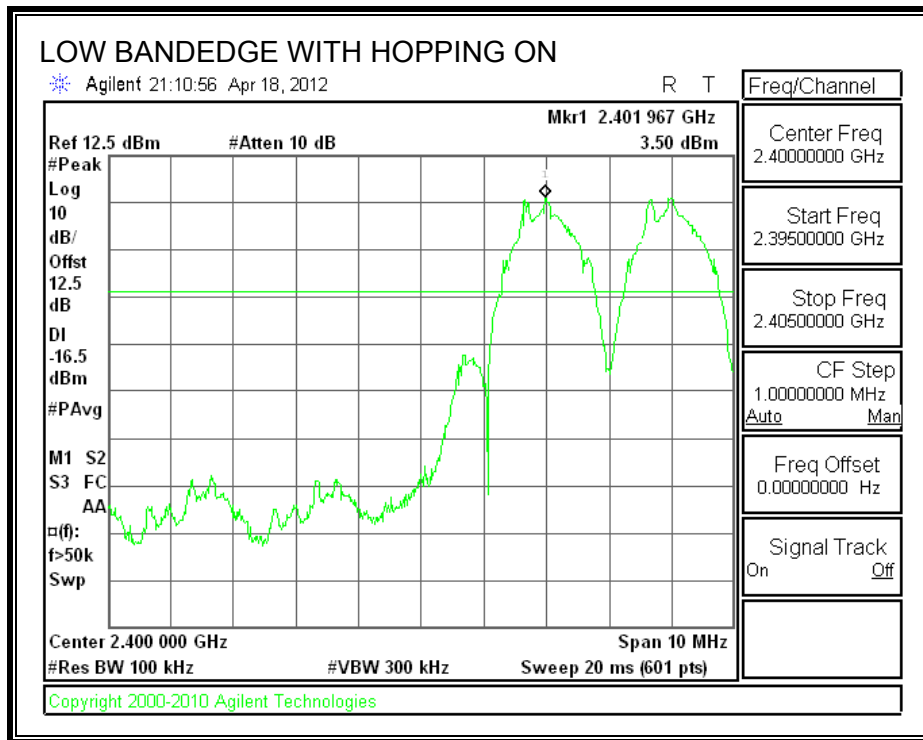

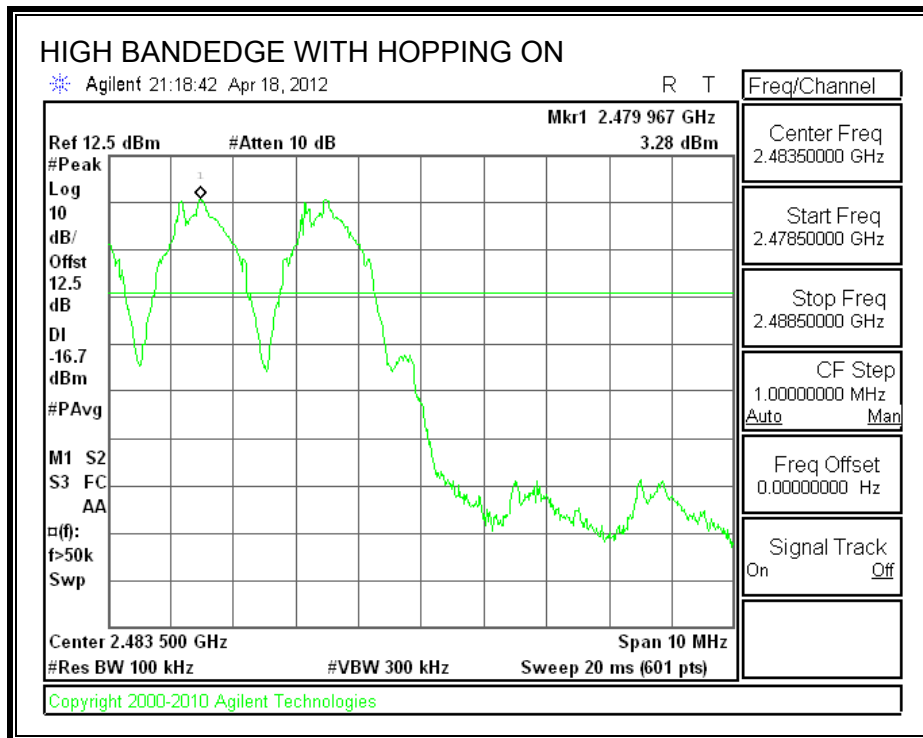


7.1.8. DUTY CYCLE

LIMITS

None; for reporting purposes only.

RESULTS

Mode	Tx on (usec)	Tx on + Tx off (usec)	Duty Cycle (%)	Correction Factor (dB)
FHSS	270	7995	3.38	14.71

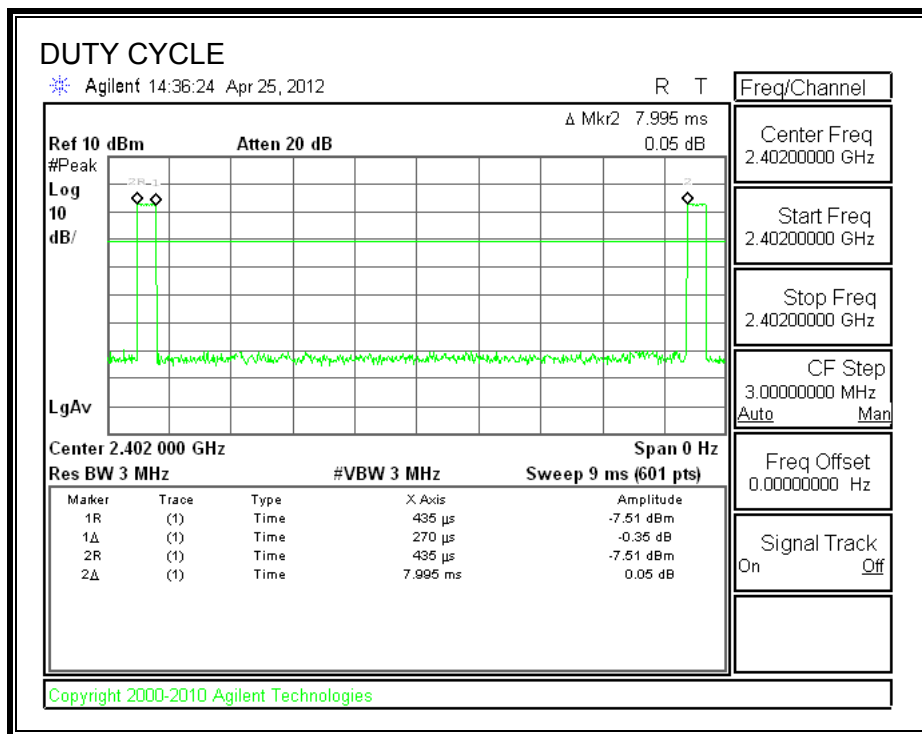

8. RADIATED TEST RESULTS

LIMITS AND PROCEDURE

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.1. Standard Non-metallic Enclosure

8.1.1. TRANSMITTER ABOVE 1 GHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

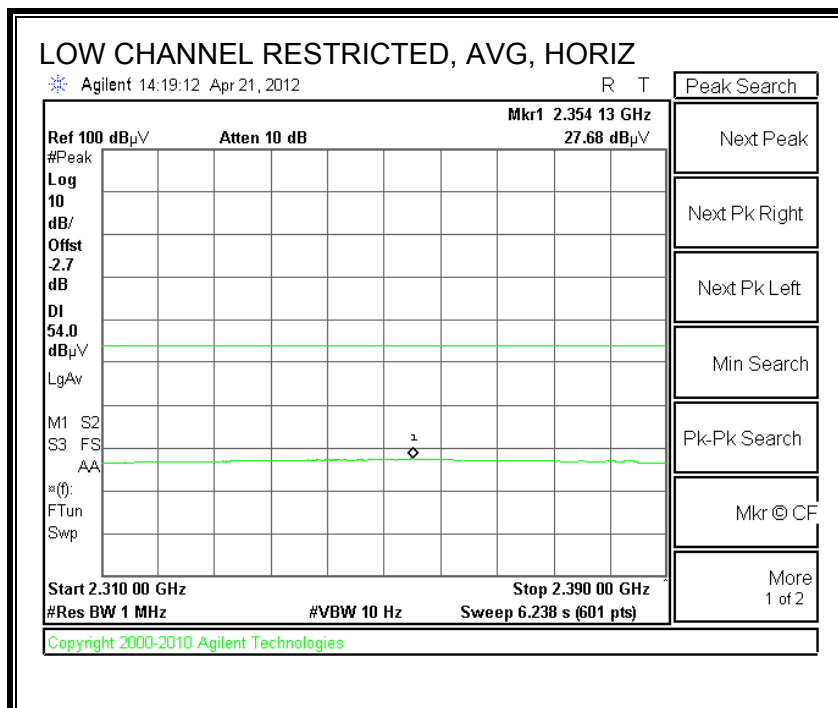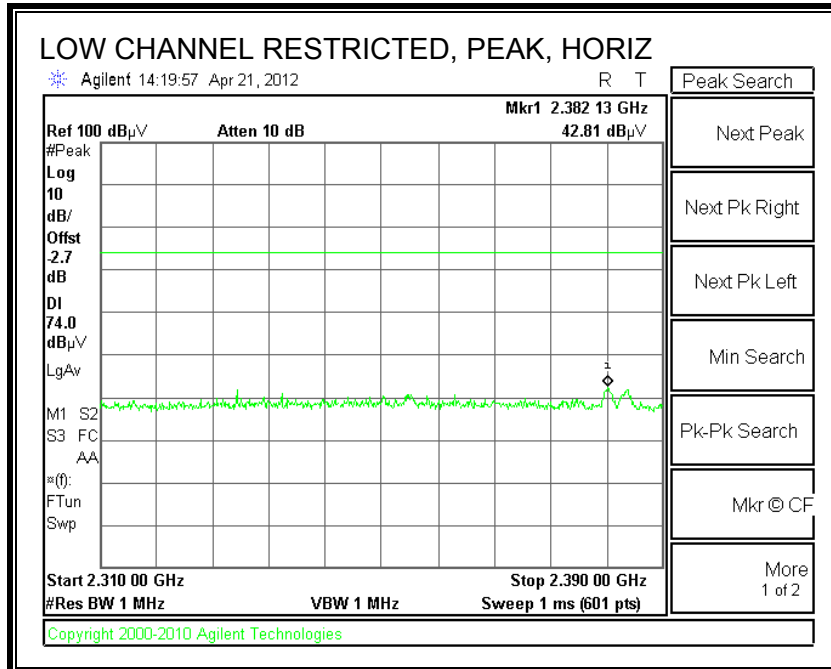


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

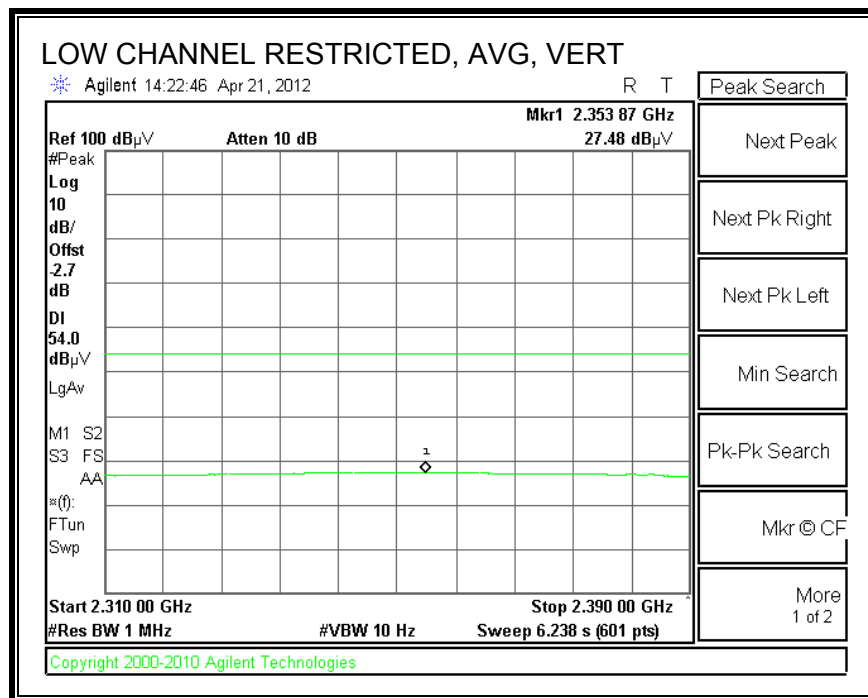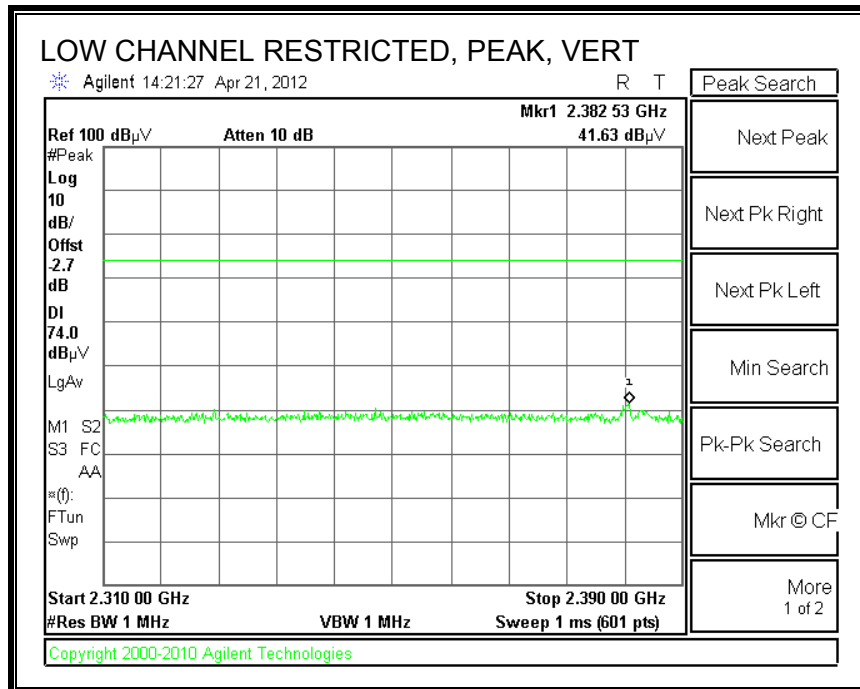


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL) (Marker Delta Method)

Fundamental Peak Power = 98.49dBuV

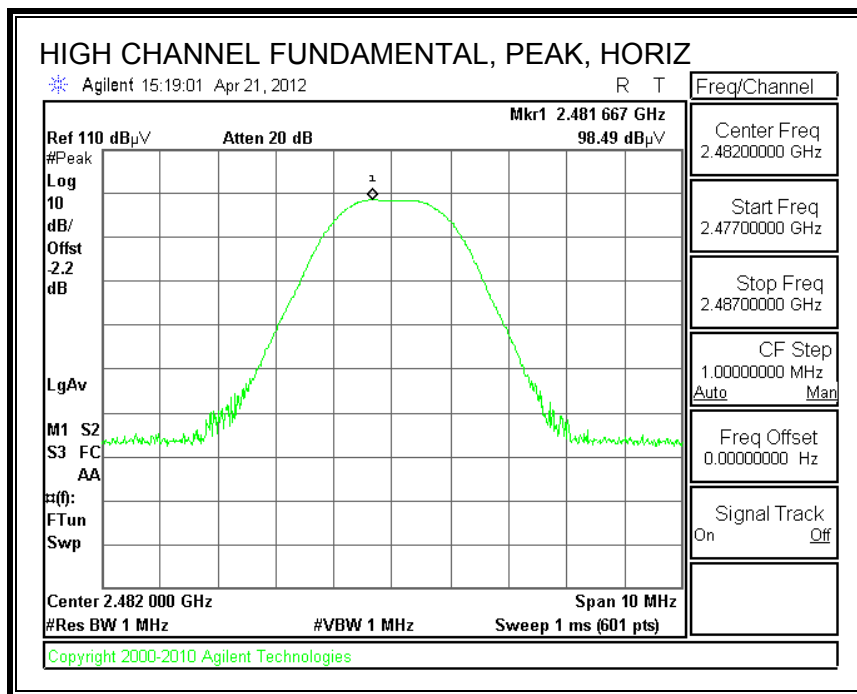

Delta from Marker Peak to Highest Marker in Restricted Band = 41.44dB

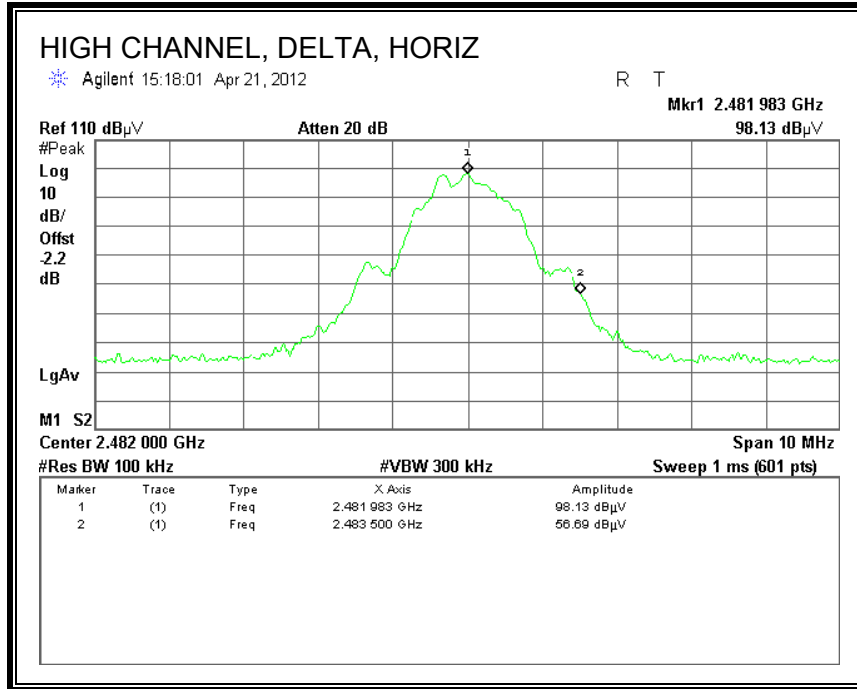

CALCULATION

_ Peak Reading = Fundamental Peak Field Strength - Delta


_ Peak Margin = Peak Reading - 74

	Delta (dB)	Horn Antenna	Fundamental (dBuV/m)		Reading (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
			Peak	AVG	Peak	AVG	Peak	AVG	Peak	AVG
High Ch, 2482MHz	41.44	Horizontal	98.49	N/A	57.05	42.34	74	54	-16.95	-11.66


AVG Power = Peak Reading – Duty Cycle
 = 57.05 dBuV/m - 14.71dBuV/m
 = 42.34 dBuV/m

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

Fundamental Peak Power = 97.14dBuV

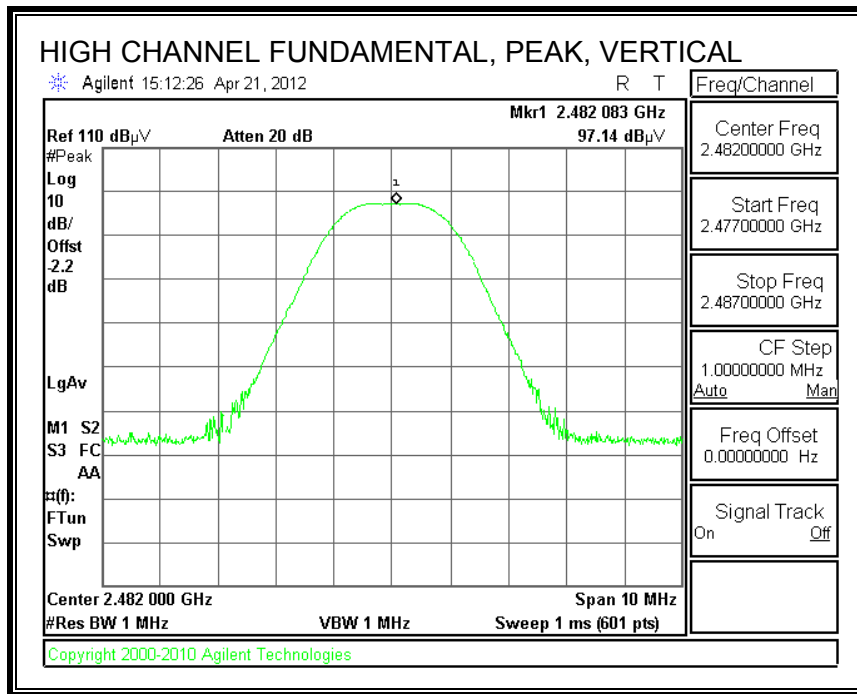

Delta from Marker Peak to Highest Marker in Restricted Band = 40.61

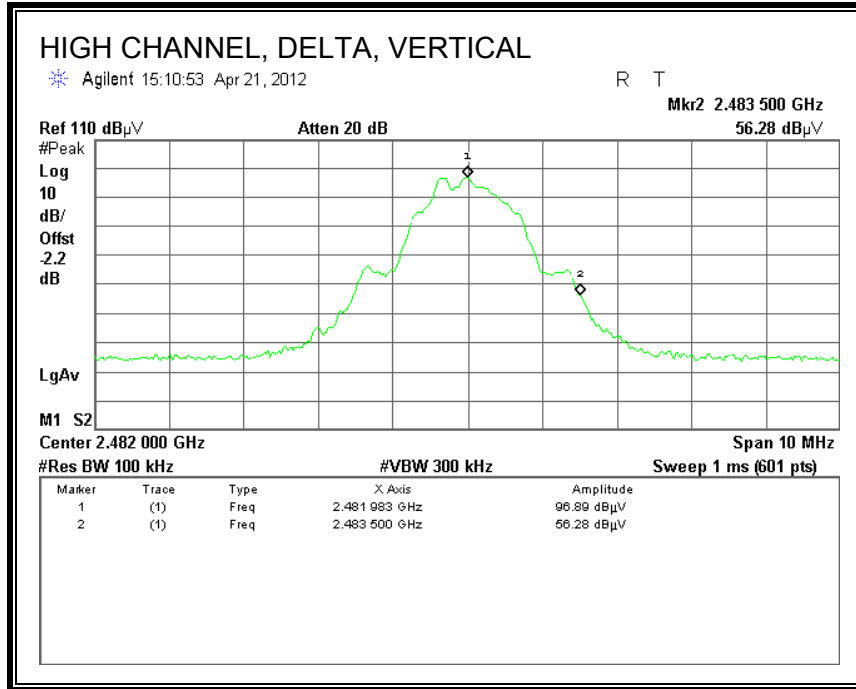

CALCULATION

_ Peak Reading = Fundamental Peak Field Strength - Delta

_ Peak Margin = Peak Reading - 74

	Delta (dB)	Horn Antenna	Fundamental (dBuV/m)		Reading (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
			Peak	AVG	Peak	AVG	Peak	AVG	Peak	AVG
High Ch, 2482MHz	40.61	Vertical	97.14	N/A	56.53	41.82	74	54	-17.47	-12.18


AVG Power = Peak Reading – Duty Cycle
 = 56.53 dBuV/m - 14.71dBuV/m
 = 41.82 dBuV/m

HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement																		
Compliance Certification Services, Fremont 3m Chamber																		
Company:		Dennis Huang																
Project #:		12U14344																
Date:		4/21/2012																
Test Engineer:		Microsoft																
Configuration:		15.247 Worst Case Test																
Mode:		Tx Mode																
Test Equipment:																		
Horn 1-18GHz			Pre-amplifer 1-26GHz			Pre-amplifer 26-40GHz			Horn > 18GHz			Limit						
T60; S/N: 2238 @3m			T34 HP 8449B									FCC 15.205						
Hi Frequency Cables																		
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter		Peak Measurements RBW=VBW=1MHz				
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001		Average Measurements RBW=1MHz ; VBW=10Hz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)			
Low Channel - 2402MHz																		
4.804	3.0	56.0	26.8	33.1	6.8	-34.1	0.0	0.0	61.8	47.1	74	54	-12.2	-6.9	V			
4.804	3.0	59.3	25.5	33.1	6.8	-34.1	0.0	0.0	65.1	50.4	74	54	-8.9	-3.6	H			
Mid Channel - 2442MHz																		
4.884	3.0	57.0	26.9	33.2	6.8	-34.0	0.0	0.0	63.0	48.3	74	54	-11.0	-5.7	V			
7.326	3.0	53.8	24.0	36.3	9.1	-33.1	0.0	0.0	66.1	51.4	74	54	-7.9	-2.6	V			
4.884	3.0	58.4	25.9	33.2	6.8	-34.0	0.0	0.0	64.4	49.7	74	54	-9.6	-4.3	H			
7.326	3.0	47.3	23.6	36.3	9.1	-33.1	0.0	0.0	59.6	44.9	74	54	-14.4	-9.1	H			
High Channel - 2482MHz																		
4.964	3.0	56.6	29.2	33.2	6.9	-34.0	0.0	0.0	62.7	48.0	74	54	-11.3	-6.0	V			
7.446	3.0	50.5	29.4	36.5	9.1	-33.0	0.0	0.0	63.1	48.4	74	54	-10.9	-5.6	V			
4.964	3.0	59.2	28.4	33.2	6.9	-34.0	0.0	0.0	65.3	50.6	74	54	-8.7	-3.4	H			
7.446	3.0	47.6	28.8	36.5	9.1	-33.0	0.0	0.0	60.2	45.5	74	54	-13.8	-8.5	H			
Rev. 11.10.11																		
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit					
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit					
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit					
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit					
CL	Cable Loss					HPF	High Pass Filter											

8.1.2. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

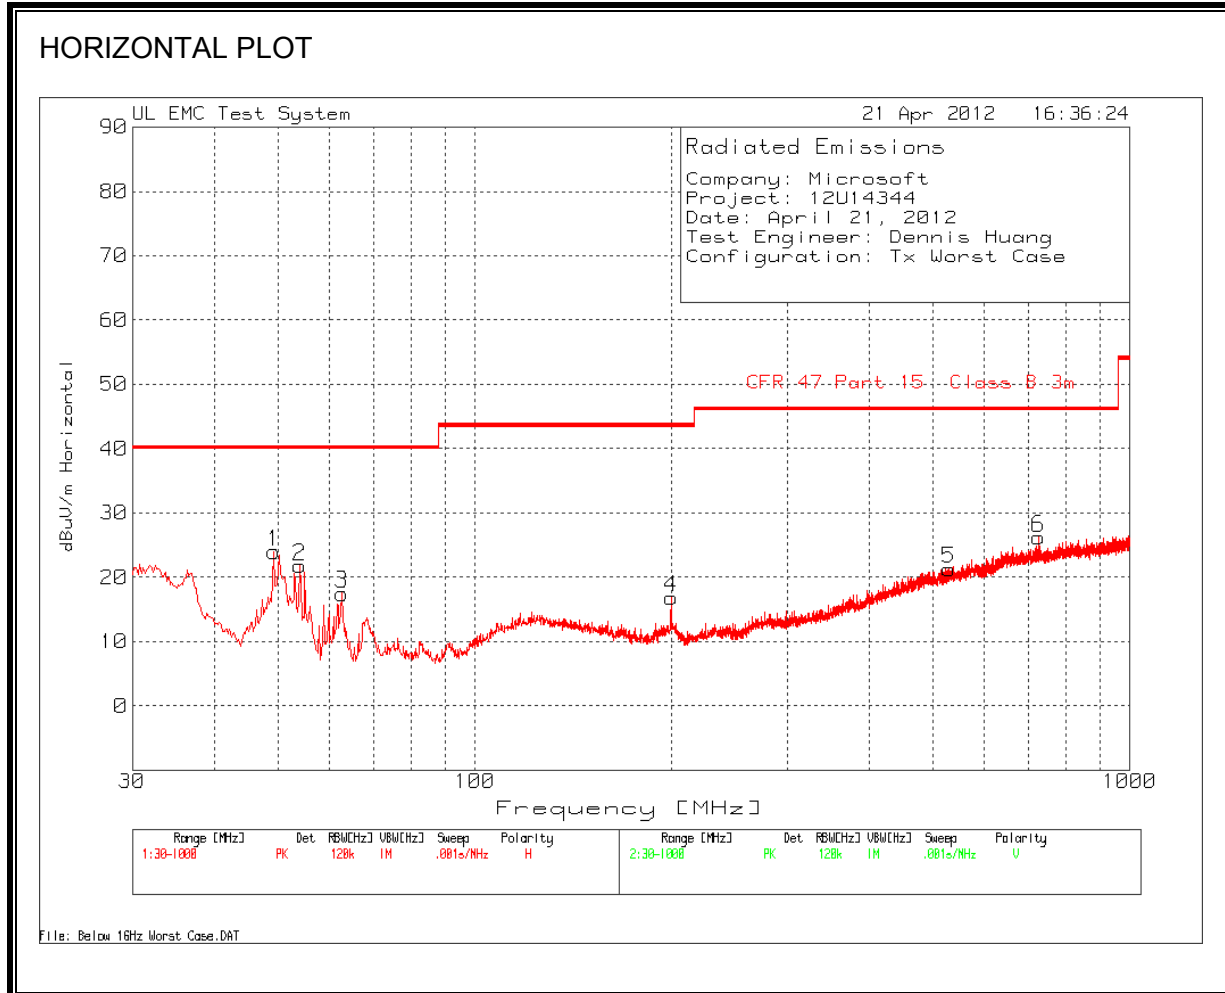

VERTICAL PLOT

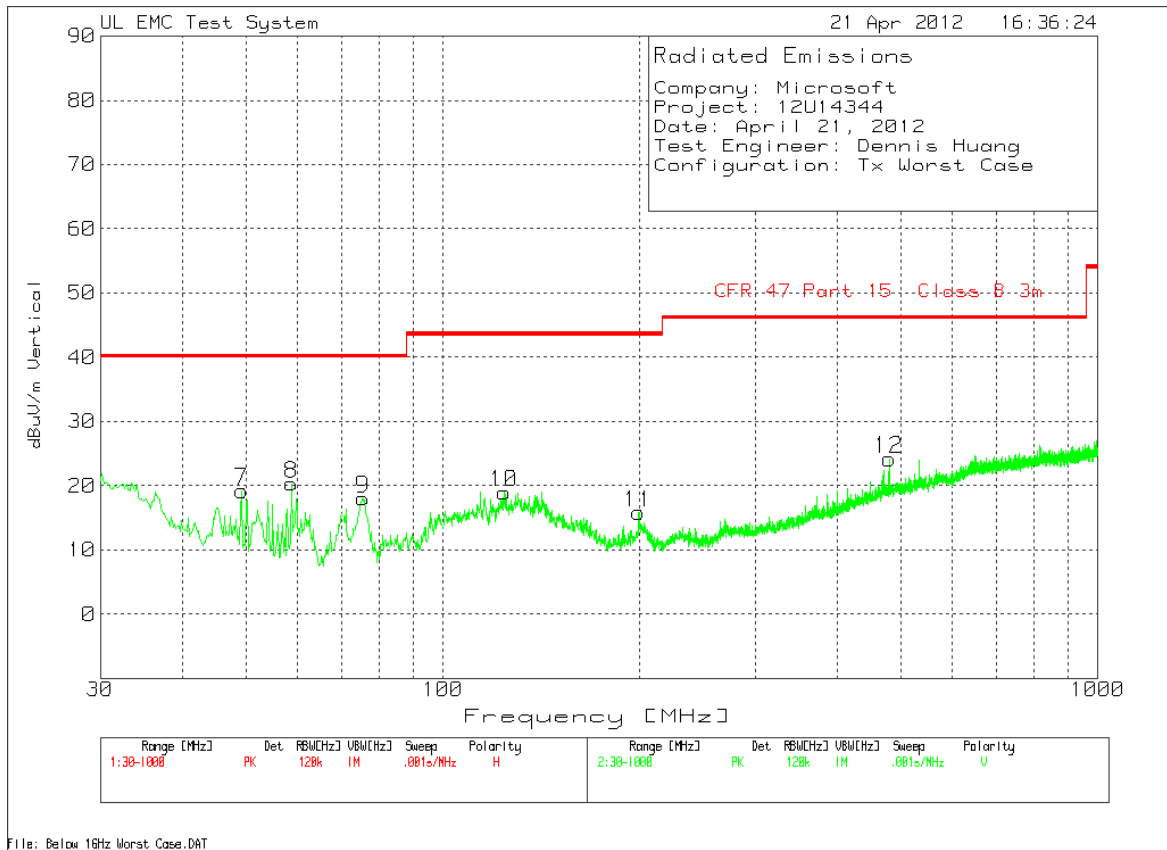

HORIZONTAL AND VERTICAL DATA

Company: Microsoft
 Project: 12U14344
 Date: April 21, 2012
 Test Engineer: Dennis Huang
 Configuration: Tx Worst Case

Test Frequency	Raw Reading (dBuV/m)	Detector	Amplifier + Cable Loss [dB]	Bilog Antenna Loss [dB]	Corrected Reading (dBuV/m)	Part 15 Class B Limit (dBuV/m)	Margin	Antenna Height [cm]	Polarity
49.3845	43.2	PK	-27.3	8.1	24	40	-16	201	Horz
54.0368	42.07	PK	-27.3	7	21.77	40	-18.23	400	Horz
62.7598	37.19	PK	-27.2	7.5	17.49	40	-22.51	201	Horz
199.6143	30.89	PK	-26.2	12.2	16.89	43.5	-26.61	100	Horz
530.1199	27.91	PK	-24.6	18	21.31	46	-24.69	400	Horz
725.7094	29.1	PK	-23.3	20.4	26.2	46	-19.8	100	Horz



Test Frequency	Raw Reading (dBuV/m)	Detector	Amplifier + Cable Loss [dB]	Bilog Antenna Loss [dB]	Corrected Reading (dBuV/m)	Part 15 Class B Limit (dBuV/m)	Margin	Ant Height [cm]	Polarity
49.3845	38.46	PK	-27.3	8.1	19.26	40	-20.74	101	Vert
58.689	40.44	PK	-27.2	7.1	20.34	40	-19.66	201	Vert
75.5536	37.04	PK	-27.1	8.1	18.04	40	-21.96	201	Vert
124.0148	31.65	PK	-26.7	14	18.95	43.5	-24.55	101	Vert
199.0328	29.95	PK	-26.2	12.1	15.85	43.5	-27.65	201	Vert
480.4956	31.53	PK	-25	17.7	24.23	46	-21.77	101	Vert

PK - Peak detector
 QP - Quasi-Peak detector
 LnAv - Linear Average detector
 LgAv - Log Average detector
 Av - Average detector
 CAV - CISPR Average detector
 RMS - RMS detection
 CRMS - CISPR RMS detection
 Text File: below 1ghz.TXT
 File: below 1ghz.DAT

8.2. Metallic Artwork Enclosure



8.2.1. TRANSMITTER ABOVE 1 GHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

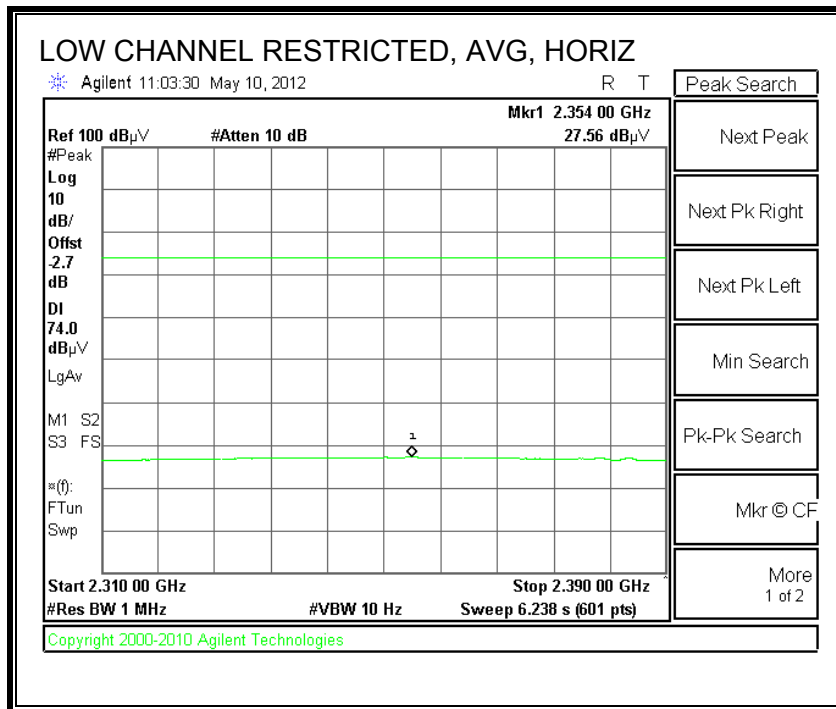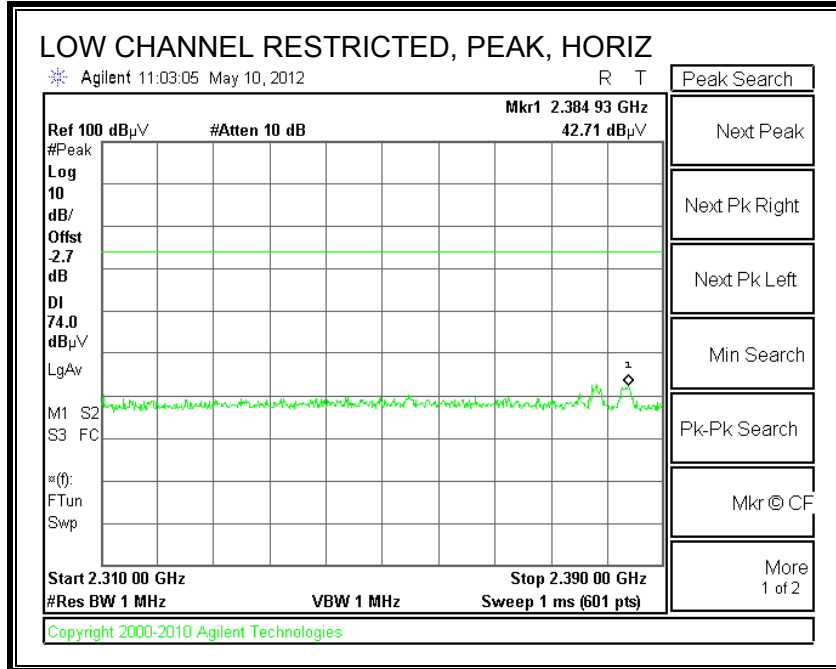

Limit for Average is at 54 dBuV/m. Limit line on graph does not depict the actual limit.


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

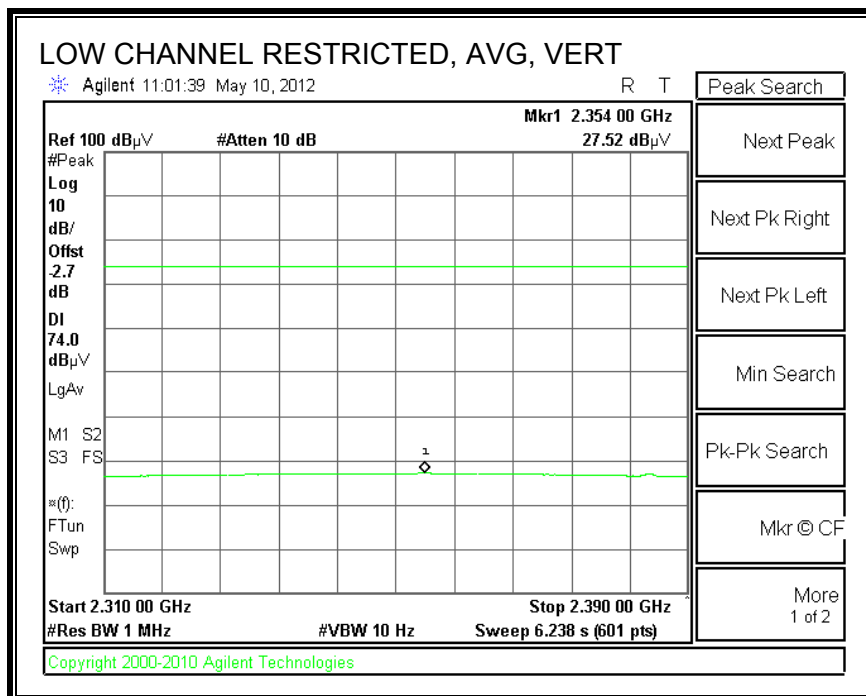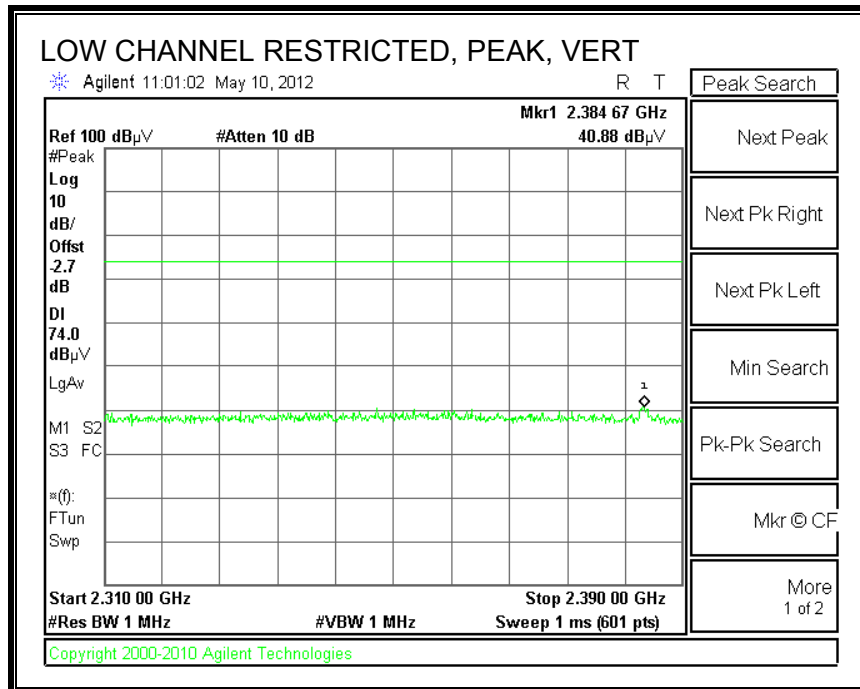


Limit for Average is at 54 dBuV/m. Limit line on graph does not depict the actual limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL) (Marker Delta Method)

Fundamental Peak Power = 103.14dBuV

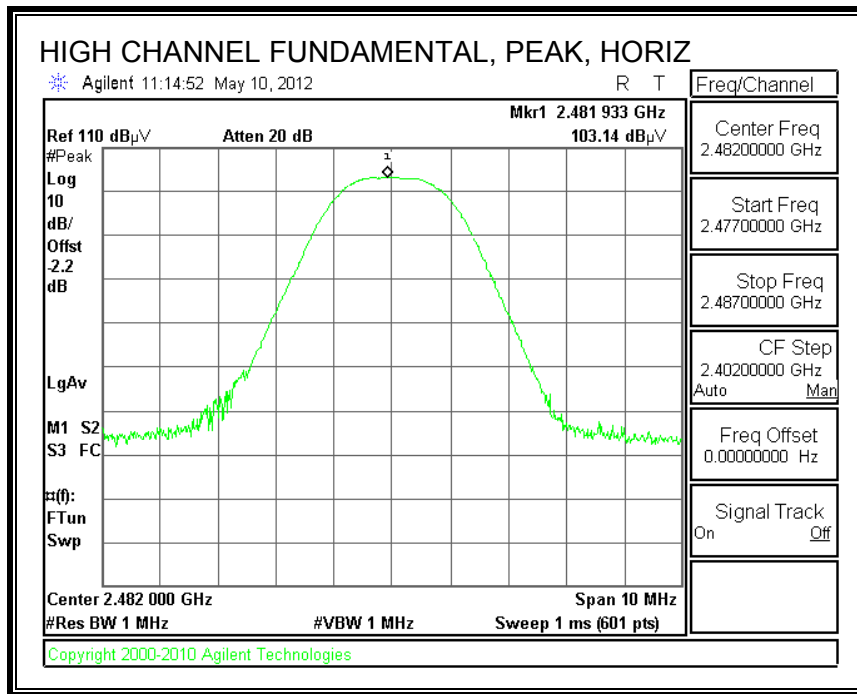

Delta from Marker Peak to Highest Marker in Restricted Band = 42.91dB

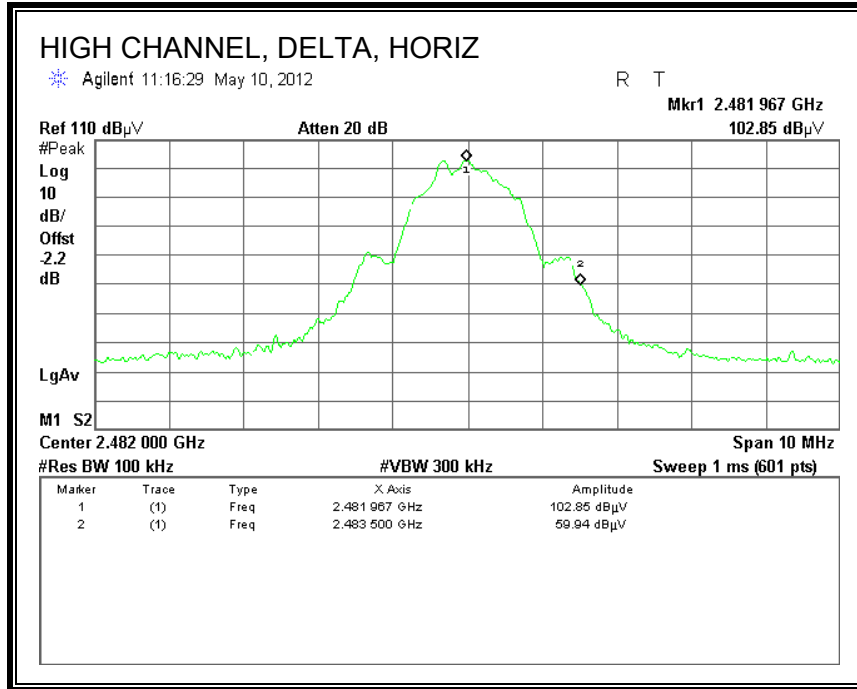

CALCULATION

_ Peak Reading = Fundamental Peak Field Strength - Delta


_ Peak Margin = Peak Reading - 74

	Delta (dB)	Horn Antenna	Fundamental (dBuV/m)		Reading (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
			Peak	AVG	Peak	AVG	Peak	AVG	Peak	AVG
High Ch, 2482MHz	42.91	Horizontal	103.14	N/A	60.23	45.52	74	54	-13.77	-8.48


AVG Power = Peak Reading – Duty Cycle
 = 60.23 dBuV/m - 14.71dBuV/m
 = 45.52 dBuV/m

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

Fundamental Peak Power = 94.64dBuV

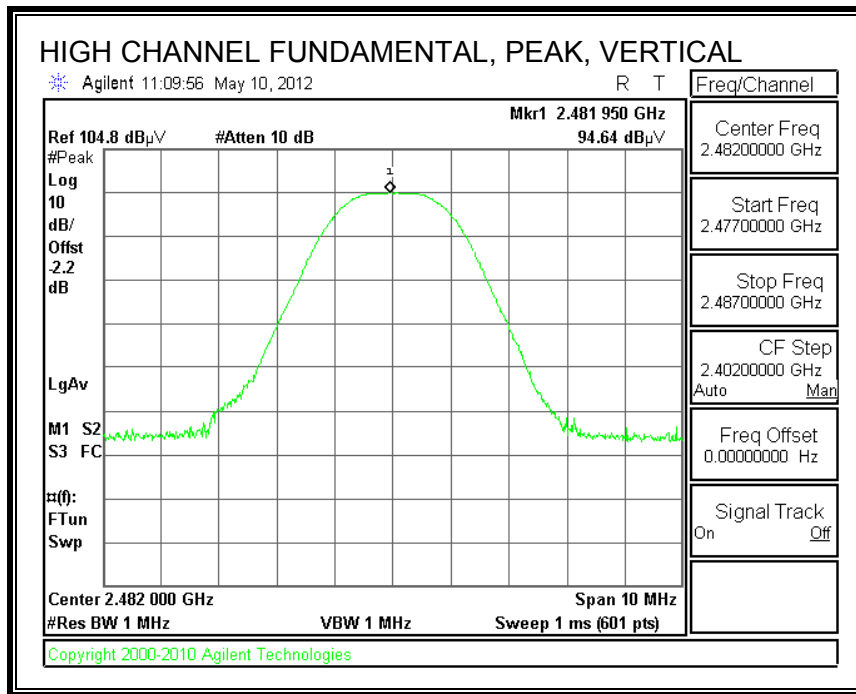

Delta from Marker Peak to Highest Marker in Restricted Band = 41.50

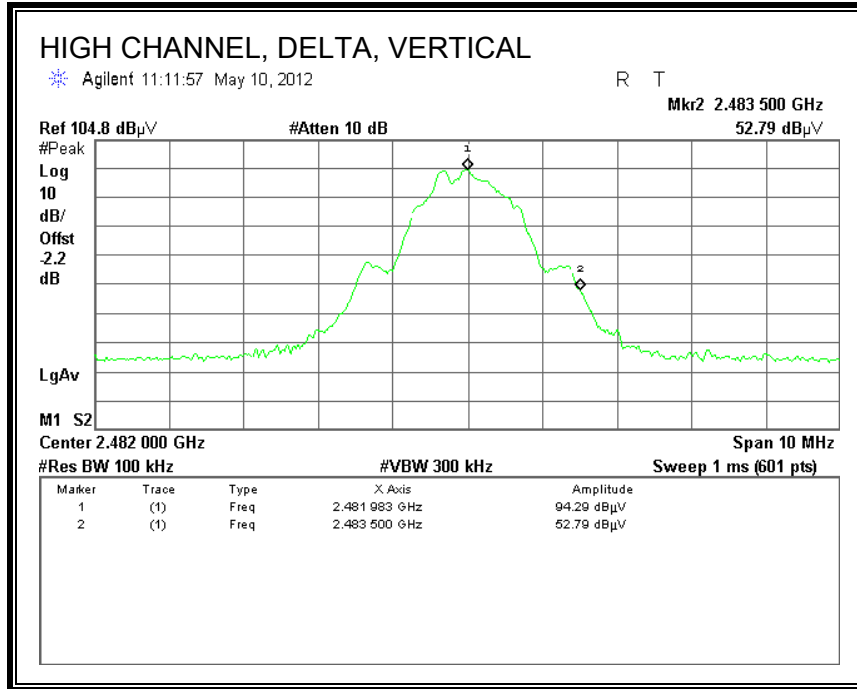

CALCULATION

_ Peak Reading = Fundamental Peak Field Strength - Delta

_ Peak Margin = Peak Reading - 74

	Delta (dB)	Horn Antenna	Fundamental (dBuV/m)		Reading (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
			Peak	AVG	Peak	AVG	Peak	AVG	Peak	AVG
High Ch, 2482MHz	41.5	Vertical	94.64	N/A	53.14	38.43	74	54	-20.86	-15.57


AVG Power = Peak Reading – Duty Cycle
 = 53.14 dBuV/m - 14.71dBuV/m
 = 38.43 dBuV/m


HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 3m Chamber																	
Company:		Dennis Huang															
Project #:		12U14344															
Date:		5/10/2012															
Test Engineer:		Microsoft															
Configuration:		15.247 Worst Case Test (Metallic Cover)															
Mode:		Tx Mode															
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T60; S/N: 2238 @3m			T34 HP 8449B									FCC 15.205					
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF		Reject Filter		Peak Measurements				
3' cable 22807700			12' cable 22807600			20' cable 22807500					R_001		RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz				
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	Filtr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)		
Low Channel - 2402MHz																	
4.804	3.0	54.4	25.7	33.1	6.8	-34.1	0.0	0.0	60.2	45.5	74	54	-13.8	-8.5	V		
4.804	3.0	57.0	25.8	33.1	6.8	-34.1	0.0	0.0	62.8	48.1	74	54	-11.2	-5.9	H		
Mid Channel - 2442MHz																	
4.884	3.0	55.6	26.1	33.2	6.8	-34.0	0.0	0.0	61.6	46.9	74	54	-12.4	-7.1	V		
7.326	3.0	52.1	24.0	36.3	9.1	-33.1	0.0	0.0	64.4	49.7	74	54	-9.6	-4.3	V		
4.884	3.0	56.0	26.0	33.2	6.8	-34.0	0.0	0.0	62.0	47.3	74	54	-12.0	-6.7	H		
7.326	3.0	46.1	23.6	36.3	9.1	-33.1	0.0	0.0	58.4	43.7	74	54	-15.6	-10.3	H		
High Channel - 2482MHz																	
4.964	3.0	54.7	25.9	33.2	6.9	-34.0	0.0	0.0	60.8	46.1	74	54	-13.2	-7.9	V		
7.446	3.0	52.6	24.4	36.5	9.1	-33.0	0.0	0.0	65.2	50.5	74	54	-8.8	-3.5	V		
4.964	3.0	58.4	25.2	33.2	6.9	-34.0	0.0	0.0	64.5	49.8	74	54	-9.5	-4.2	H		
7.446	3.0	46.9	23.9	36.5	9.1	-33.0	0.0	0.0	59.5	44.8	74	54	-14.5	-9.2	H		
Rev. 11.10.11																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

8.2.2. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

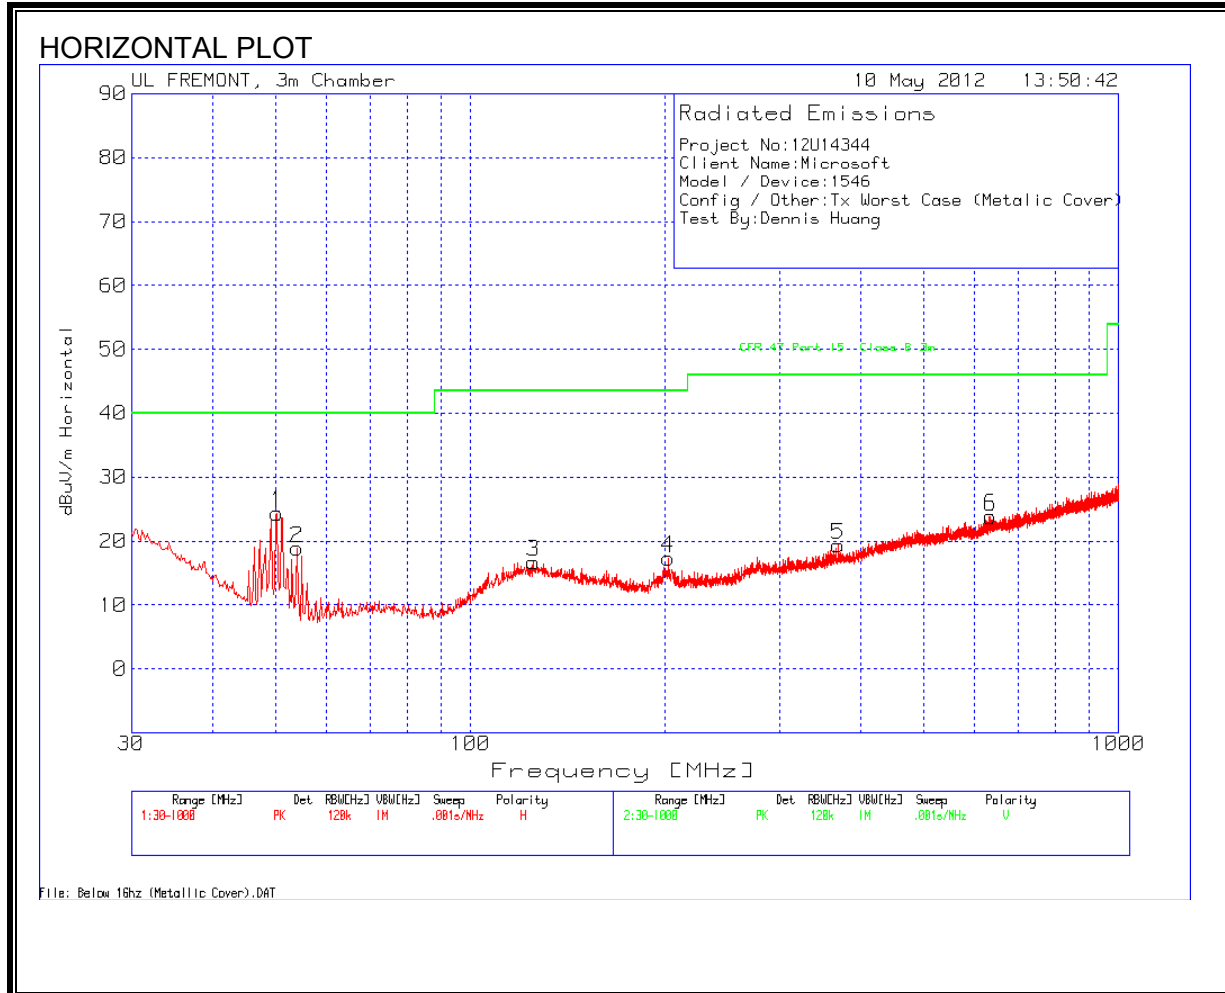

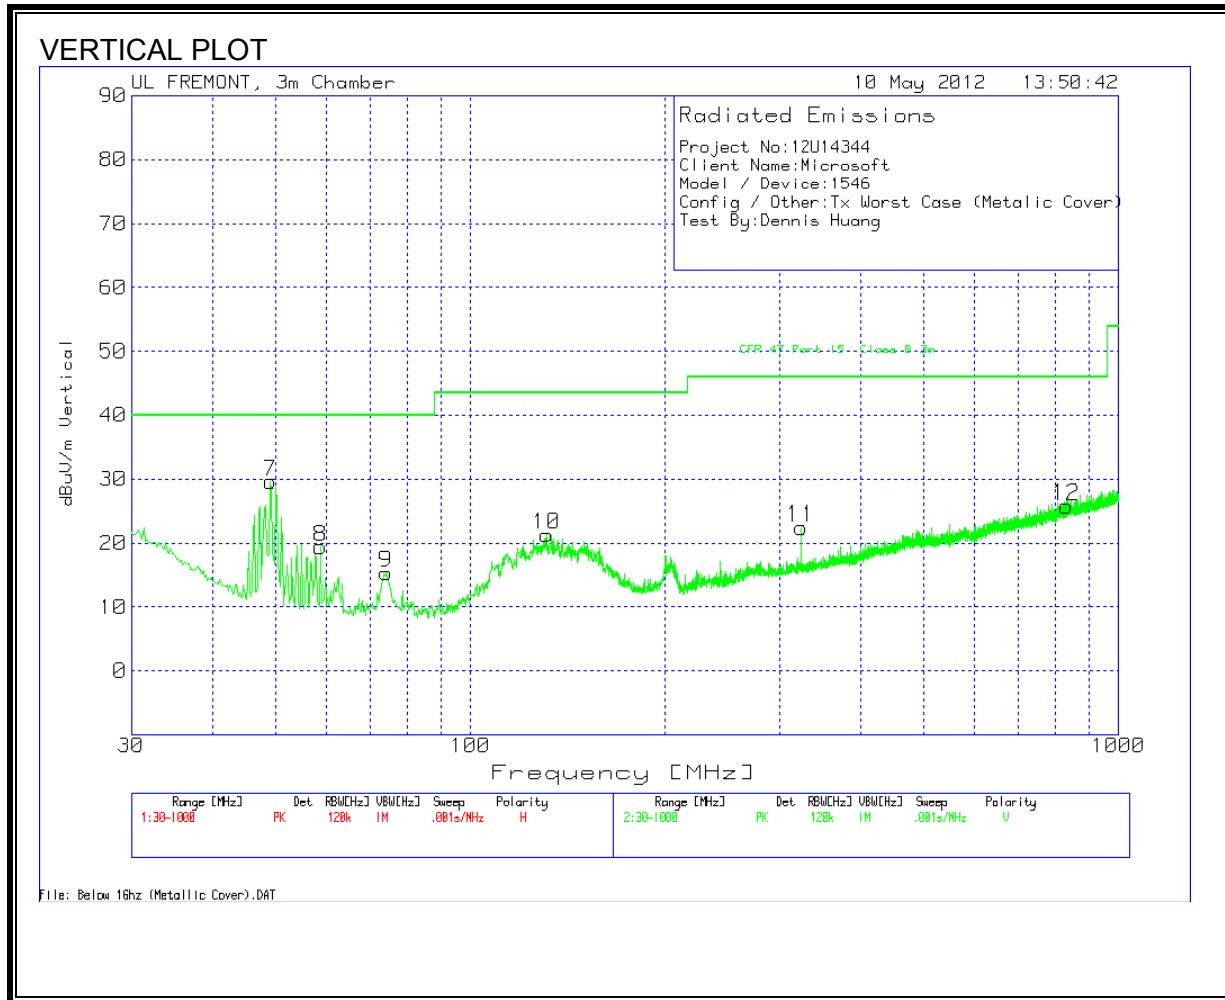

HORIZONTAL AND VERTICAL DATA

Company: Microsoft
 Project: 12U14344
 Date: May 10, 2012
 Test Engineer: Dennis Huang
 Configuration: Tx Worst Case (Metallic Cover)

Test Frequency	Raw Reading (dBuV/m)	Detector	Amplifier + Cable Loss [dB]	Bilog Antenna Loss [dB]	Corrected Reading (dBuV/m)	Part 15 Class B Limit (dBuV/m)	Margin	Antenna Height [cm]	Polarity
50.3537	43.87	PK	-27.3	7.8	24.37	40	-15.63	201	Horz
54.0368	39.1	PK	-27.2	7	18.9	40	-21.1	399	Horz
125.1779	29.21	PK	-26.5	14	16.71	43.5	-26.79	399	Horz
202.1343	31.26	PK	-25.8	11.9	17.36	43.5	-26.14	301	Horz
369.6163	29.86	PK	-25.5	15	19.36	46	-26.64	100	Horz
635.3777	29.77	PK	-25.5	19.6	23.87	46	-22.13	301	Horz

Test Frequency	Raw Reading (dBuV/m)	Detector	Amplifier + Cable Loss [dB]	Bilog Antenna Loss [dB]	Corrected Reading (dBuV/m)	Part 15 Class B Limit (dBuV/m)	Margin	Ant Height [cm]	Polarity
49.1906	48.74	PK	-27.3	8.2	29.64	40	-10.36	101	Vert
58.689	39.51	PK	-27.2	7.1	19.41	40	-20.59	201	Vert
74.1966	34.25	PK	-27.1	8.2	15.35	40	-24.65	101	Vert
131.1871	34.19	PK	-26.5	13.6	21.29	43.5	-22.21	101	Vert
324.0628	33.96	PK	-25.3	13.8	22.46	46	-23.54	201	Vert
831.3549	28.58	PK	-24.4	21.6	25.78	46	-20.22	101	Vert

PK - Peak detector
 QP - Quasi-Peak detector
 LnAv - Linear Average detector
 LgAv - Log Average detector
 Av - Average detector
 CAV - CISPR Average detector
 RMS - RMS detection
 CRMS - CISPR RMS detection
 Text File: Below 1Ghz (Metallic Cover).TXT
 File: Below 1Ghz (Metallic Cover).DAT

9. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \text{Pi} * D^2)$$

where

- S = Power density in W/m²
- EIRP = Equivalent Isotropic Radiated Power in W
- D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

where

- D = Separation distance in m
- EIRP = Equivalent Isotropic Radiated Power in W
- S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

- Px = Power of transmitter x
- Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
2.4 GHz	FHSS	0.20	11.18	-0.20	0.0249	0.00249