

FCC Test Report

Report No.: RF150713D10

FCC ID: C3K1737

Test Model: 1737

Received Date: Jun. 28, 2015

Test Date: Jun. 28 ~ Jul. 13, 2015

Issued Date: Jul. 17, 2015

Applicant: MICROSOFT CORPORATION

Address: ONE MICROSOFT WAY REDMOND, WA 98052-6399, U.S.A

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
3 General Information	6
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3 Description of Support Units.....	10
3.3.1 Configuration of System under Test.....	10
3.4 General Description of Applied Standards.....	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Set Up.....	15
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results.....	16
4.2 Frequency Tolerance Measurement.....	32
4.2.1 Limits of Frequency Tolerance Measurement.....	32
4.2.2 Test Setup.....	32
4.2.3 Test Instruments.....	32
4.2.4 Test Procedure.....	32
4.2.5 Deviation from Test Standard.....	32
4.2.6 EUT Operating Condition.....	32
4.2.7 Test Results.....	33
5 Pictures of Test Arrangements	34
Appendix – Information on the Testing Laboratories	35



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150713D10	Original release.	Jul. 17, 2015

1 Certificate of Conformity

Product: Wireless Mouse

Brand: Microsoft®

Test Model: 1737

Sample Status: Engineering sample

Applicant: MICROSOFT CORPORATION

Test Date: Jun. 28 ~ Jul. 13, 2015

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.249)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Jessica Cheng , **Date:** Jul. 17, 2015
(Jessica Cheng / Senior Specialist)

Approved by : Rex Lai , **Date:** Jul. 17, 2015
(Rex Lai / Assistant Manager)

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.249)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Power supply is 1.5Vdc from battery
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -7.3dB at 2483.50MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	4.00 dB
Radiated Emissions above 1 GHz	Above 1GHz	3.36 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Mouse
Brand	Microsoft®
Test Model	1737
Status of EUT	Engineering sample
Power Supply Rating	1.5Vdc
Modulation Type	GFSK
Operating Frequency	2403MHz ~ 2480MHz
Number of Channel	24
Antenna Type	PCB antenna with 0.5dBi gain
Antenna Connector	N/A
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. The EUT is a Wireless Mouse.
2. The EUT has serial samples, which are defined as their serial numbers as follows:

Model No.	Serial No.
1737	EVT333, EVT338, EVT339, EVT350

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

24 channels are provided to this EUT:

Channel Group	Channel	Frequency (MHz)	Channel Group	Channel	Frequency (MHz)
Subset A	0	2403	Subset D	12	2405
	1	2419		13	2425
	2	2478		14	2444
	3	2468		15	2452
Subset B	4	2429	Subset E	16	2423
	5	2450		17	2446
	6	2470		18	2456
	7	2480		19	2474
Subset C	8	2421	Subset F	20	2417
	9	2431		21	2427
	10	2472		22	2448
	11	2454		23	2476

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE [≥] 1G	RE<1G	PLC	FT	
-	√	√	√	√	-

Where **RE[≥]1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement
FT: Frequency Tolerance

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	SERIAL NO.
-	0 to 23	0, 14, 7	GFSK	EVT333
-	0 to 23	0, 14, 7	GFSK	EVT338
-	0 to 23	0, 14, 7	GFSK	EVT339

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	SERIAL NO.
-	0 to 23	0	GFSK	EVT333
-	0 to 23	0	GFSK	EVT338
-	0 to 23	0	GFSK	EVT339

Frequency Tolerance:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	SERIAL NO.
-	0 to 23	0, 14, 7	GFSK	EVT350



Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	28deg. C, 59%RH	1.5Vdc	Aaron You
RE<1G	28deg. C, 70%RH	1.5Vdc	Aaron You
FT	24deg. C, 75%RH	1.5Vdc	Saxon Lee




3.3 Description of Support Units

The EUT has been tested as an independent unit together without any necessary accessory or support unit.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	EUT	Microsoft®	1737	EVT333, EVT338, EVT339, EVT350	-	-

3.3.1 Configuration of System under Test

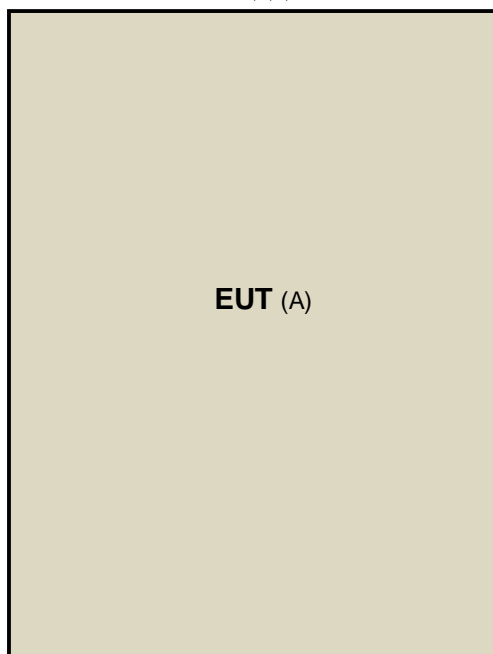

(Powered from battery)

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.249)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2015	Feb. 25, 2016
HP Preamplifier	8449B	3008A01201	Feb. 26, 2015	Feb. 25, 2016
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Mar. 01, 2015	Feb. 28, 2016
Agilent Spectrum	E4446A	MY51100050	Oct. 24, 2014	Oct. 23, 2015
Agilent TEST RECEIVER	N9038A	MY51210129	Jan. 20, 2015	Jan. 19, 2016
Schwarzbeck Antenna	VULB 9168	139	Feb. 04, 2015	Feb. 03, 2016
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2015	May 28, 2017
Schwarzbeck Horn Antenna	BBHA-9170	212	Feb. 09, 2015	Feb. 08, 2016
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Feb. 10, 2015	Feb. 09, 2016
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V7.6.15.9.4	NA	NA	NA
SUHNER RF cable	SF104	CABLE-CH6	Aug. 15, 2014	Aug. 14, 2015
SUHNER RF cable	SF102	Cable-CH8-3.6m	Aug. 15, 2014	Aug. 14, 2015
EMCO Horn Antenna	3115	00028257	Feb. 05, 2015	Feb. 04, 2016
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 29, 2014	Sep. 28, 2015
Anritsu Power Sensor	MA2411B	0738404	Apr. 21, 2015	Apr. 20, 2016
Anritsu Power Meter	ML2495A	0842014	Apr. 21, 2015	Apr. 20, 2016

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.
 4. The Industry Canada Reference No. IC 7450E-6.
 5. The FCC Site Registration No. is 447212.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

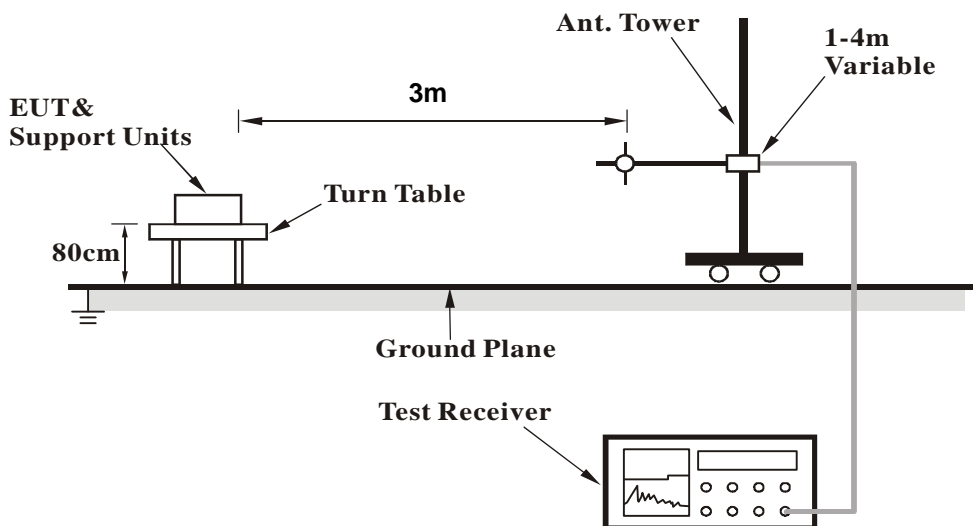

<Frequency Range above 1GHz>

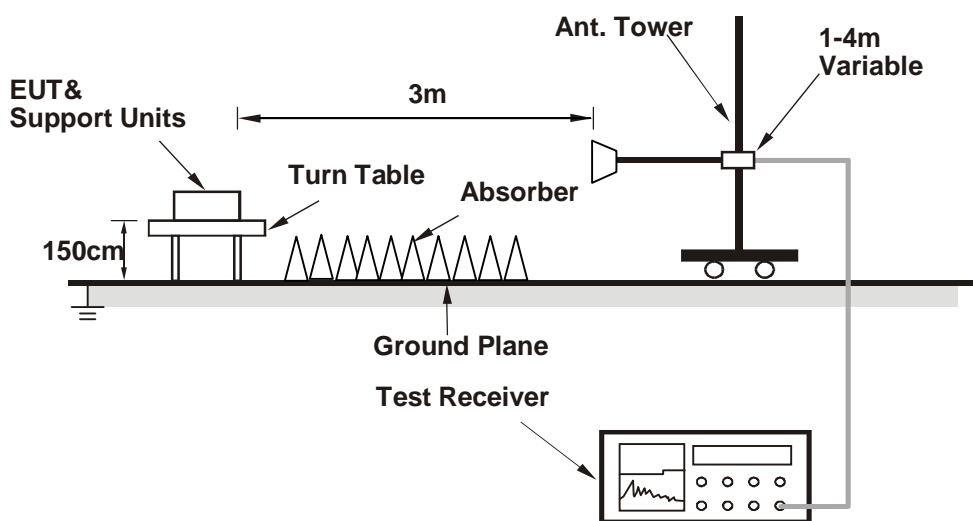

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results
Above 1GHz Data (For Fundamental, Harmonics) :

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT333		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2403.00	94.1 PK	114.0	-19.9	1.37 H	19	98.69	-4.56
2	*2403.00	60.5 AV	94.0	-33.5	1.37 H	19	65.07	-4.56
3	4806.00	52.6 PK	74.0	-21.4	1.61 H	115	50.79	1.85
4	4806.00	19.0 AV	54.0	-35.0	1.61 H	115	17.17	1.85
5	7209.00	56.9 PK	74.0	-17.1	1.19 H	180	49.86	7.04
6	7209.00	23.3 AV	54.0	-30.7	1.19 H	180	16.24	7.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2403.00	86.8 PK	114.0	-27.3	1.00 V	320	91.31	-4.56
2	*2403.00	53.1 AV	94.0	-40.9	1.00 V	320	57.69	-4.56
3	4806.00	52.4 PK	74.0	-21.6	1.25 V	0	50.51	1.85
4	4806.00	18.7 AV	54.0	-35.3	1.25 V	0	16.89	1.85
5	7209.00	55.1 PK	74.0	-18.9	1.27 V	104	48.09	7.04
6	7209.00	21.5 AV	54.0	-32.5	1.27 V	104	14.47	7.04

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The average value of fundamental frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:
 $20 \log (\text{Duty cycle}) = 20 \log (0.173 \text{ ms} / 8.304 \text{ ms}) = -33.6 \text{ dB}$
 Please see page 19 for plotted duty.

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT333		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2444.00	94.3 PK	114.0	-19.7	1.35 H	1	98.73	-4.39
2	*2444.00	60.7 AV	94.0	-33.3	1.35 H	1	65.11	-4.39
3	4888.00	52.4 PK	74.0	-21.6	1.41 H	144	50.41	1.96
4	4888.00	18.8 AV	54.0	-35.3	1.41 H	144	16.79	1.96
5	7332.00	59.7 PK	74.0	-14.3	1.01 H	170	52.47	7.27
6	7332.00	26.1 AV	54.0	-27.9	1.01 H	170	18.85	7.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2444.00	87.5 PK	114.0	-26.5	1.29 V	225	91.92	-4.39
2	*2444.00	53.9 AV	94.0	-40.1	1.29 V	225	58.30	-4.39
3	4888.00	51.9 PK	74.0	-22.2	1.41 V	6	49.89	1.96
4	4888.00	18.2 AV	54.0	-35.8	1.41 V	6	16.27	1.96
5	7332.00	58.2 PK	74.0	-15.8	1.00 V	315	50.90	7.27
6	7332.00	24.6 AV	54.0	-29.5	1.00 V	315	17.28	7.27

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The average value of fundamental frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:

$$20 \log (\text{Duty cycle}) = 20 \log (0.173 \text{ ms} / 8.304 \text{ ms}) = -33.6 \text{ dB}$$
Please see page 19 for plotted duty.

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT333		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	93.6 PK	114.0	-20.4	1.17 H	164	97.87	-4.25
2	*2480.00	60.0 AV	94.0	-34.0	1.17 H	164	64.25	-4.25
3	4960.00	58.1 PK	74.0	-15.9	1.73 H	149	56.02	2.08
4	4960.00	24.5 AV	54.0	-29.5	1.73 H	149	22.40	2.08
5	7440.00	62.0 PK	74.0	-12.0	1.00 H	156	54.63	7.40
6	7440.00	28.4 AV	54.0	-25.6	1.00 H	156	21.01	7.40


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	84.0 PK	114.0	-30.0	1.00 V	30	88.25	-4.25
2	*2480.00	50.4 AV	94.0	-43.6	1.00 V	30	54.63	-4.25
3	4960.00	56.3 PK	74.0	-17.8	1.47 V	358	54.17	2.08
4	4960.00	22.6 AV	54.0	-31.4	1.47 V	358	20.55	2.08
5	7440.00	61.8 PK	74.0	-12.2	1.35 V	352	54.36	7.40
6	7440.00	28.1 AV	54.0	-25.9	1.35 V	352	20.74	7.40

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The average value of fundamental frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:

$$20 \log (\text{Duty cycle}) = 20 \log (0.173 \text{ ms} / 8.304 \text{ ms}) = -33.6 \text{ dB}$$
Please see page 19 for plotted duty.

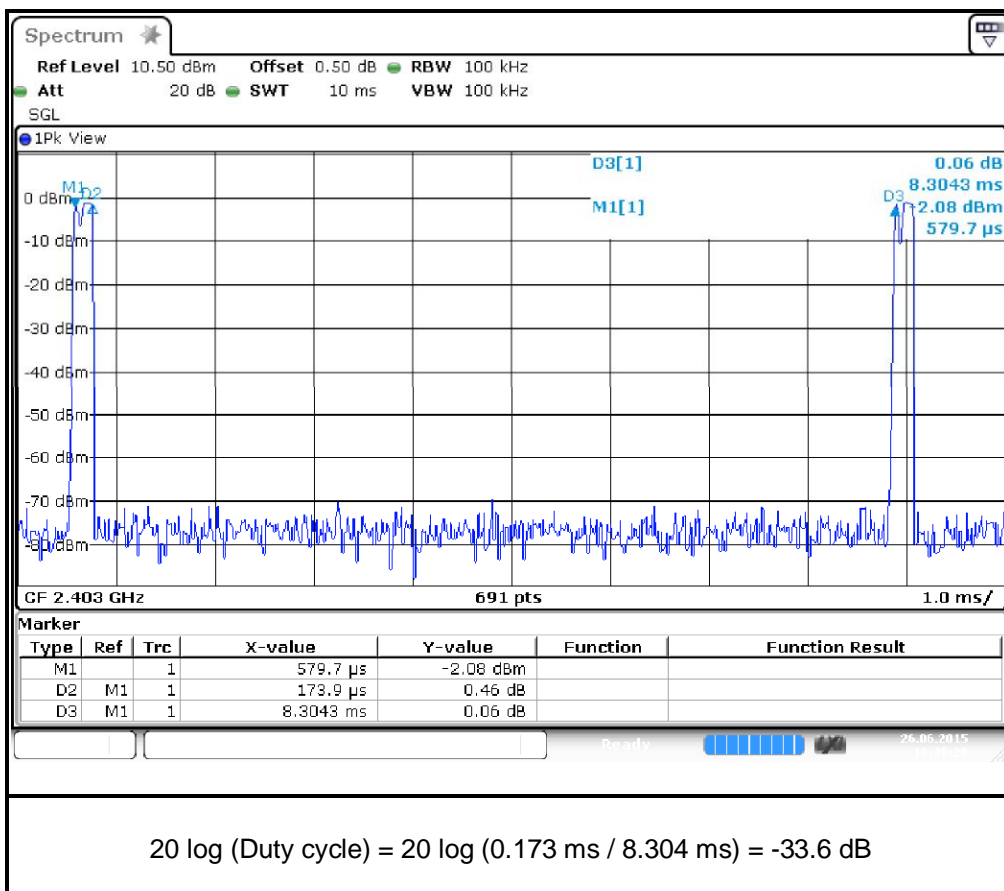

ABOVE 1GHz DATA (For Spurious Emission) :

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT333		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.37 H	19	62.05	-4.65
2	2390.00	38.8 AV	54.0	-15.2	1.37 H	19	43.43	-4.65
3	2400.00	50.2 PK	74.0	-23.8	1.37 H	19	54.79	-4.58
4	2400.00	16.6 AV	54.0	-37.4	1.37 H	19	21.17	-4.58
5	2748.00	40.5 PK	74.0	-33.5	1.28 H	117	43.94	-3.42
6	2748.00	27.2 AV	54.0	-26.8	1.28 H	117	30.58	-3.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.5 PK	74.0	-22.5	1.00 V	320	56.15	-4.65
2	2390.00	35.9 AV	54.0	-18.1	1.00 V	320	40.53	-4.65
3	2400.00	42.4 PK	74.0	-31.7	1.00 V	320	46.93	-4.58
4	2400.00	8.7 AV	54.0	-45.3	1.00 V	320	13.31	-4.58
5	2748.00	39.2 PK	74.0	-34.8	1.02 V	158	42.61	-3.42
6	2748.00	26.6 AV	54.0	-27.4	1.02 V	158	30.02	-3.42

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT333		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	40.6 PK	74.0	-33.5	1.20 H	342	43.89	-3.34
2	2795.00	27.7 AV	54.0	-26.3	1.20 H	342	31.01	-3.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	38.9 PK	74.0	-35.1	1.41 V	160	42.22	-3.34
2	2795.00	26.8 AV	54.0	-27.2	1.41 V	160	30.15	-3.34

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT333		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.50	66.7 PK	74.0	-7.3	1.17 H	164	70.89	-4.22
2	2483.50	33.1 AV	54.0	-21.0	1.17 H	164	37.27	-4.22
3	2836.00	40.9 PK	74.0	-33.1	1.33 H	149	44.02	-3.16
4	2836.00	27.9 AV	54.0	-26.1	1.33 H	149	31.09	-3.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.50	58.3 PK	74.0	-15.7	1.00 V	30	62.49	-4.22
2	2483.50	24.7 AV	54.0	-29.4	1.00 V	30	28.87	-4.22
3	2836.00	39.4 PK	74.0	-34.6	1.25 V	110	42.55	-3.16
4	2836.00	27.5 AV	54.0	-26.5	1.25 V	110	30.69	-3.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT338		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	39.7 PK	74.0	-34.3	1.42 H	258	43.11	-3.42
2	2748.00	27.4 AV	54.0	-26.6	1.42 H	258	30.84	-3.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	39.1 PK	74.0	-34.9	1.53 V	155	42.51	-3.42
2	2748.00	26.9 AV	54.0	-27.2	1.53 V	155	30.27	-3.42

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT338		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	39.8 PK	74.0	-34.2	1.33 H	332	43.18	-3.34
2	2795.00	27.6 AV	54.0	-26.4	1.33 H	332	30.96	-3.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	39.4 PK	74.0	-34.7	1.50 V	148	42.69	-3.34
2	2795.00	26.9 AV	54.0	-27.1	1.50 V	148	30.28	-3.34

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT338		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	40.3 PK	74.0	-33.7	1.07 H	124	43.44	-3.16
2	2836.00	27.8 AV	54.0	-26.2	1.07 H	124	30.92	-3.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	39.8 PK	74.0	-34.2	1.10 V	360	42.95	-3.16
2	2836.00	27.1 AV	54.0	-26.9	1.10 V	360	30.30	-3.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT339		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	39.6 PK	74.0	-34.4	1.29 H	131	43.02	-3.42
2	2748.00	27.3 AV	54.0	-26.8	1.29 H	131	30.67	-3.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	39.1 PK	74.0	-34.9	1.00 V	330	42.55	-3.42
2	2748.00	26.7 AV	54.0	-27.3	1.00 V	330	30.10	-3.42

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT339		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	39.9 PK	74.0	-34.1	1.58 H	100	43.27	-3.34
2	2795.00	27.5 AV	54.0	-26.5	1.58 H	100	30.86	-3.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	39.1 PK	74.0	-35.0	1.22 V	348	42.39	-3.34
2	2795.00	27.1 AV	54.0	-26.9	1.22 V	348	30.43	-3.34

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EVT339		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	40.5 PK	74.0	-33.5	1.10 H	106	43.62	-3.16
2	2836.00	27.8 AV	54.0	-26.2	1.10 H	106	30.94	-3.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	39.7 PK	74.0	-34.3	1.40 V	332	42.85	-3.16
2	2836.00	27.4 AV	54.0	-26.7	1.40 V	332	30.51	-3.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
SERIAL NO.	EVT333		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.92	16.0 QP	40.0	-24.0	4.00 H	34	30.60	-14.60
2	152.95	14.9 QP	43.5	-28.6	4.00 H	58	28.50	-13.58
3	296.12	18.0 QP	46.0	-28.0	2.90 H	71	30.41	-12.40
4	511.99	27.9 QP	46.0	-18.1	1.76 H	266	36.12	-8.24
5	840.03	27.5 QP	46.0	-18.5	1.00 H	48	29.91	-2.43
6	903.39	29.0 QP	46.0	-17.0	1.00 H	360	30.54	-1.55

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.74	24.7 QP	40.0	-15.3	1.28 V	328	38.33	-13.61
2	118.37	15.7 QP	43.5	-27.8	1.00 V	342	32.12	-16.44
3	310.72	18.5 QP	46.0	-27.5	1.27 V	68	30.56	-12.03
4	619.18	23.1 QP	46.0	-22.9	2.53 V	0	29.24	-6.13
5	742.61	25.8 QP	46.0	-20.2	2.71 V	239	29.81	-3.99
6	978.22	28.7 QP	54.0	-25.4	2.33 V	358	28.91	-0.26

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
SERIAL NO.	EVT338		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.92	14.7 QP	40.0	-25.3	4.00 H	338	29.27	-14.60
2	158.53	15.0 QP	43.5	-28.6	4.00 H	244	28.47	-13.52
3	350.49	17.2 QP	46.0	-28.8	2.25 H	345	28.87	-11.63
4	507.58	27.4 QP	46.0	-18.6	1.85 H	88	35.71	-8.29
5	759.05	25.6 QP	46.0	-20.4	1.00 H	113	29.26	-3.63
6	888.69	27.6 QP	46.0	-18.4	1.00 H	299	29.70	-2.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.96	23.8 QP	40.0	-16.2	1.27 V	221	37.39	-13.58
2	115.55	15.9 QP	43.5	-27.6	1.00 V	56	32.77	-16.84
3	307.61	22.6 QP	46.0	-23.4	1.00 V	75	34.64	-12.08
4	629.17	23.3 QP	46.0	-22.7	1.88 V	0	29.13	-5.80
5	761.09	26.0 QP	46.0	-20.0	2.43 V	210	29.58	-3.57
6	965.23	28.0 QP	54.0	-26.0	1.97 V	186	28.57	-0.54

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
SERIAL NO.	EVT339		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.17	14.5 QP	40.0	-25.5	4.00 H	215	29.06	-14.57
2	158.39	15.0 QP	43.5	-28.5	4.00 H	256	28.52	-13.52
3	377.53	18.2 QP	46.0	-27.8	2.99 H	360	29.07	-10.83
4	510.21	27.7 QP	46.0	-18.3	1.75 H	277	35.94	-8.28
5	819.24	27.8 QP	46.0	-18.2	1.00 H	106	30.52	-2.73
6	914.98	28.0 QP	46.0	-18.0	1.00 H	25	29.32	-1.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.57	24.3 QP	40.0	-15.7	1.00 V	303	37.95	-13.64
2	117.88	19.3 QP	43.5	-24.2	1.00 V	11	35.74	-16.46
3	223.56	17.5 QP	46.0	-28.5	1.00 V	150	33.90	-16.36
4	507.63	22.2 QP	46.0	-23.8	2.37 V	360	30.53	-8.29
5	629.72	23.5 QP	46.0	-22.5	2.65 V	87	29.27	-5.79
6	840.73	27.1 QP	46.0	-18.9	2.13 V	284	29.57	-2.44

REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Frequency Tolerance Measurement

4.2.1 Limits of Frequency Tolerance Measurement

Limit : $\pm 0.001\%$

4.2.2 Test Setup

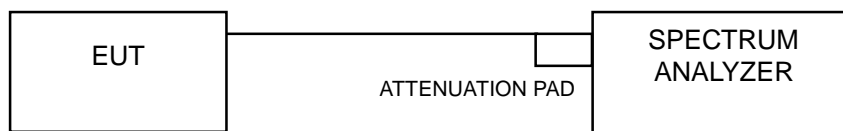

4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.001\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

4.2.5 Deviation from Test Standard

No deviation

4.2.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.2.7 Test Results

SERIAL NO.: EVT350

CH 0

TEST CONDITION			Carrier Frequency (MHz)	Frequency Drift (kHz)	Frequency error (%)
Tnom(°C)	+20	Vnom(V)	2402.9737	0.00	0.00000%
Tmin(°C)	-20	Vmin(V)	2402.9868	13.10	0.00055%
		Vmax(V)	2402.9867	13.00	0.00054%
Tmax(°C)	+55	Vmin(V)	2402.9766	2.90	0.00012%
		Vmax(V)	2402.9764	2.70	0.00011%
Limit : ±0.001%					

CH 14

TEST CONDITION			Carrier Frequency (MHz)	Frequency Drift (kHz)	Frequency error (%)
Tnom(°C)	+20	Vnom(V)	2443.9729	0.00	0.00000%
Tmin(°C)	-20	Vmin(V)	2443.9860	13.10	0.00054%
		Vmax(V)	2443.9859	13.00	0.00053%
Tmax(°C)	+55	Vmin(V)	2443.9859	13.00	0.00053%
		Vmax(V)	2443.9856	12.70	0.00052%
Limit : ±0.001%					

CH 7

TEST CONDITION			Carrier Frequency (MHz)	Frequency Drift (kHz)	Frequency error (%)
Tnom(°C)	+20	Vnom(V)	2479.9725	0.00	0.00000%
Tmin(°C)	-20	Vmin(V)	2479.9856	13.10	0.00053%
		Vmax(V)	2479.9857	13.20	0.00053%
Tmax(°C)	+55	Vmin(V)	2479.9856	13.10	0.00053%
		Vmax(V)	2479.9858	13.30	0.00054%
Limit : ±0.001%					

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---