



RADIO TEST REPORT

For

MODEL NO.:1769

FCC ID: C3K1769

IC ID: 3048A-1769

Test Report No. R-TR402-FCCISED-UNII-1

Issue Date: March 23, 2017

FCC CFR47 Part 15 Subpart E
Innovation, Science and Economic Development
Canada RSS-247 Issue 1

Prepared by

Microsoft EMC Laboratory
17760 NE 67th Ct,
Redmond WA, 98052, U.S.A.
425-421-9799

sajose@microsoft.com



TESTING CERT #3472.01

Table of Contents

1	Record of Revisions.....	2
2	Deviations from Standards	6
3	Facilities and Accreditations	6
3.1	Test Facility	6
3.2	Accreditations	6
3.3	Test Equipment	6
4	Measurement Uncertainty.....	6
5	Product Description	7
5.1	Test Configurations	7
5.2	Environmental Conditions.....	8
5.3	Antenna Requirements and Gain Information	8
5.4	Equipment Modifications	8
5.5	Dates of Testing	8
6	Test Results Summary	9
7	Test Equipment List.....	11
8	Test Site Description.....	14
8.1	Radiated Emissions Test Site.....	14
8.1.1	Radiated Measurements in 30 MHz - 1000 MHz	14
8.1.2	Radiated Measurements above 1GHz	14
8.2	Antenna port conducted measurements.....	14
8.3	Test Setup Diagrams	14
9	Test Results- Conducted	17
9.1	26-dB Emission Bandwidth.....	17
9.1.1	Test Requirement:.....	17
9.1.2	Test Method:	17
9.1.3	Limits:	17
9.1.4	Test Results:	17
9.2	99% Occupied Bandwidth	18
9.2.1	Test Requirement:.....	18
9.2.2	Test Method:	18
9.2.3	Limits:	18
9.2.4	Test Results:	18
9.2.5	Test Data:.....	19

9.3	6-dB Bandwidth	69
9.3.1	Test Requirement:	69
9.3.2	Test Method:	69
9.3.3	Limits:	69
9.3.4	Test Results:	69
9.3.5	Test Data:	70
9.4	Maximum Conducted Output Power	87
9.4.1	Test Requirement:	87
9.4.2	Test Method:	87
9.4.3	Limits:	87
9.4.4	Test Results:	87
9.5	Power Spectral Density	88
9.5.1	Test Requirement:	88
9.5.2	Test Method:	88
9.5.3	Limits:	88
9.5.4	Test Results:	89
9.5.5	Test Data	90
9.6	Radiated Spurious and Band Edge Emissions	151
9.6.1	Test Requirement:	151
9.6.2	Test Method:	151
9.6.3	Limits:	154
9.6.4	Test Result:	154
9.6.5	Test Data:	155
9.7	AC Line Conducted Emissions	200
9.7.1	Test Requirements	200
9.7.2	Test Method	200
9.7.3	Limit	200
9.7.4	Test Result:	200
9.7.5	Test Data:	201

Test Report Attestation

Microsoft Corporation**Model:** 1769**FCC ID:** C3K1769**ISED ID:** 3048A-1769**Applicable Standards**


Specification	Test Result
FCC CFR47 Rule Parts 15.207, 15.209, 15.407	Pass
Innovation, Science and Economic Development Canada RSS-247 Issue 1, RSS-GEN Issue 4	Pass

Microsoft EMC Laboratory attests that the product model identified in this report has been tested to and meets the requirements identified in the above standards. The test results in this report solely pertains to the specific sample tested, under the conditions and operating modes as provided by the customer.

This report shall not be used to claim product certification, approval, or endorsement by A2LA or any agency of any Government. Reproduction, duplication or publication of extracts from this test report is prohibited and requires prior written approval of Microsoft EMC Laboratory.



Written By: Andy Shen
Radio Test Engineer



Reviewed/ Issued By: Sajay Jose
EMC/RF Compliance Lab Manager

2 Deviations from Standards

None.

3 Facilities and Accreditations

3.1 Test Facility

All test facilities used to collect the test data are located at Microsoft EMC Laboratory,
 17760 NE 67th Ct,
 Redmond WA, 98052, USA

3.2 Accreditations

The lab is established and follows procedures as outlined in IEC/ISO 17025 and A2LA accreditation requirements.

A2LA Accredited Testing Certificate Number: 3472.01

FCC Registration Number: US1141

IC Site Registration Numbers: 3048A-3, 3048A-4

3.3 Test Equipment

The site and related equipment are constructed in conformance with the requirements of ANSI C63.4:2014 and other equivalent applicable standards.

Test site requirements for measurements above 1 GHz are in accordance with ANSI C63.4:2014.

ANSI C63.10:2013 and the appropriate KDB test methods were followed.

4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the product, as specified in ETSI TR 100 028. This represents an expanded uncertainty expressed at 95% confidence level using a coverage factor $k=2$. These levels are for reference only and not included to determine product compliance.

Expanded uncertainty calculations are available upon request.

Test item	Uncertainty	Unit
Radiated disturbance (30 MHz to 1 GHz)	5.99	dB
Radiated disturbance (1 GHz to 18 GHz)	5.12	dB
Conducted Disturbance at Mains Port	3.31	dB
Uncertainty for Conducted Power test	1.277	dB
Uncertainty for Conducted Spurious emission test	2.742	dB
Uncertainty for Bandwidth test	178	kHz
Uncertainty for DC power test	0.05	%
Uncertainty for test site temperature	0.5	°C
Uncertainty for test site Humidity	3	%
Uncertainty for time	0.189	%

5 Product Description

Company Name:	Microsoft Corporation
Address:	One Microsoft Way
City, State, Zip:	Redmond, WA 98052-6399
Customer Contact:	Mike Boucher
Functional Description of the EUT:	Portable Computing Device with IEEE 802.11a/b/g/n/ac MIMO supporting 20/40/80 MHz bandwidths, and Bluetooth 4.0 Radios.
Model:	1769
FCC ID:	C3K1769
IC ID:	3048A-1769
Radio under test:	IEEE 802.11a/n/ac supporting 20/40/80 MHz Bandwidths 5150- 5250 MHz, 5250-5350 MHz, 5470-5725 MHz and 5725- 5850 MHz. This device does not support the straddle channels that overlap the 5470 -5725MHz and 5725-5850 MHz bands.
Modulation(s):	OFDM – BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
EUT Classification:	UNII
Equipment Design State:	Prototype/Production Equivalent
Equipment Condition:	Good
Test Sample Details:	RF Conducted Test Sample SN: 005372463857, 010566364757 RF Radiated Test Sample SN: 005372463857, 010566364757, 014995763957, 010557364757

5.1 Test Configurations

Test software “WiFi Tool” (V2.7.5), provided by the customer, and “Lab Tool” (V2.0.0.77), from the module vendor, were used to program the EUT to transmit continuously and change modes of operation.

All modes of operation were investigated initially and full testing performed on the worst-case modes as described below-

802.11a: 6Mbps

802.11n HT20: MCS0

802.11n HT40: MCS0

802.11ac VHT80: MCS0

5.2 Environmental Conditions

Ambient air temperature of the test site was within the range of 10 °C to 40 °C (50 °F to 104 °F) unless the EUT specified testing over a different temperature range. Humidity levels were in the range of 10% to 90% relative humidity. Testing conditions were within tolerance, and any deviations required from the EUT are reported.

5.3 Antenna Requirements and Gain Information

The antennas are internal, permanently attached and there are no provisions for connection to an external antenna.

Antenna Gain		
Frequency Band (MHz)	Chain A MIMO Wi-Fi Antenna Peak Gain (dBi)	Chain B Main Antenna Wi-Fi Peak Gain (dBi)
UNII Band 1- 5150 to 5250	3.2	3.4
UNII Band 2a – 5250 to 5350	3.5	3.5
UNII Band 2c – 5470 to 5725	5.2	5.2
UNII Band 3 – 5725 to 5850	4.5	4.2

Simultaneous transmission on both transmit chains was observed to be the worst-case mode of operation for all test cases. Since transmit signals in CSD modes are correlated only over small bandwidths, and not over the entire signal bandwidth, the combined in-band gain for total power is considered as uncorrelated and calculated using the following formula as specified in KDB 662911 D01 Multiple Transmitter Output v02r01:

$$\text{Uncorrelated Directional gain} = 10\log [(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] \text{ dBi}$$

Since transmit signals in CSD modes are correlated over small bandwidths, the total gain will influence PSD measurements. The combined gain for PSD is considered to be correlated and calculated using the following formula as specified in KDB 662911 D01 Multiple Transmitter Output v02r01:

$$\text{Correlated Directional gain} = 10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N_{ANT}] \text{ dBi}$$

Combined Directional Antenna Gain		
Frequency Band (MHz)	Uncorrelated Directional Gain (dBi)	Correlated Directional Gain (dBi) (for PSD only)
UNII Band 1- 5150 to 5250	3.30	6.31
UNII Band 2a – 5250 to 5350	3.50	6.51
UNII Band 2c – 5470 to 5725	5.20	8.21
UNII Band 3 – 5725 to 5850	4.35	7.36

5.4 Equipment Modifications

No modifications were made during testing.

5.5 Dates of Testing

Testing was performed from December 9, 2017 to January 17, 2017, and March 15, 2017.

6 Test Results Summary

Test Description	Applicable Bands (GHz)	FCC CFR 47/ISED Rule Part	Limit	Test Result
26dB Emission Bandwidth	5.15 – 5.25 5.25 – 5.35 5.47 – 5.725	15.407 (a) RSS-247 [6.2.1]	Reporting and Measurement Purposes	NA
99% bandwidth	5.15 – 5.25 5.25 – 5.35 5.47 – 5.725	RSS-247 [6.2]	Reporting and Measurement Purposes	NA
6 dB Bandwidth	5.725 – 5.85	15.407 (e) RSS-247 [6.2.4]	≥ 500kHz	Pass
Output Power	5.15 – 5.25	15.407 (a)(1)(iv)	≤ 250 mW or 10 + 10 log ₁₀ B* whichever is less	Pass
		RSS-247 [6.2.1]	≤ 200 mW or 10 + 10 log ₁₀ B* e.i.r.p whichever is less	Pass
	5.25 – 5.35 5.47 – 5.725	15.407 (a)(2) RSS-247 [6.2]	≤ 250 mW or 11 + 10 log ₁₀ B* whichever is less ≤ 1 W or 17 + 10 log ₁₀ B* e.i.r.p whichever is less	Pass
	5.725 – 5.85	15.407 (a)(3) RSS-247 [6.2]	≤ 1000 mW	Pass
Power Spectral Density	5.15 – 5.25	15.407 (a)(1)(iv)	≤ 11dBm/MHz	Pass
		RSS-247 [6.2]	≤ 10dBm/MHz e.i.r.p.	Pass
	5.25 – 5.35 5.47 – 5.725	15.407 (a)(2) RSS-247 [6.2]	≤ 11dBm/MHz	Pass
	5.725 – 5.85	15.407 (a)(3) RSS-247 [6.2]	≤ 30dBm/500kHz	Pass
Radiated Spurious Emissions/ Restricted Band Emissions	5.15 – 5.25 5.25 – 5.35 5.47 – 5.725 5.725 – 5.85	15.407 (b), 15.205, 15.209, RSS-Gen [8.9]	FCC CFR 47 15.209 limits RSS-Gen [8.9]	Pass

AC Power Line Conducted Emissions	5.15 – 5.25 5.25 – 5.35 5.47 – 5.725 5.725 – 5.85	15.407 (b), 15.207 RSS-Gen [8.8]	FCC CFR 47 15.207 limits RSS-Gen [8.8]	Pass
---	--	--	---	------

* Note: **B-** FCC references 26dB bandwidth and ISED references 99% bandwidth.

7 Test Equipment List

Equipment used for Radiated and Conducted Measurements				
Manufacturer	Description	Model #	Asset #	Calibration Due
Rohde & Schwarz	EMI Test Receiver	ESU40	RF-012	4/14/2017
Rohde & Schwarz	EMI Test Receiver	ESU40	RF-229	4/13/2017
Rohde & Schwarz	Signal Analyzer	FSV40	RF-228	4/12/2017
Rohde & Schwarz	Power Meter	NRP-Z81	RF-283	4/12/2017
Rohde & Schwarz	Power Meter	NRP-Z91	RF-182	12/04/2017
Keysight	Spectrum Analyzer	N9030A	EMC-846	4/20/2017
Sunol Sciences	Antenna - Broadband Hybrid	JB6	RF-039	5/27/2017
ETS-Lindgren	Antenna	3117-PA	EMC-858	4/21/2017
ETS-Lindgren	Antenna	3117-PA	RF-137	2/25/2017
ETS-Lindgren	Antenna – Standard Gain Horn	3160-09	EMC-452	6/03/2017
ETS-Lindgren	Antenna – Standard Gain Horn	3160-10	RF-038	6/03/2017
Rohde & Schwarz	Custom Filter Bank+PreAmp	SFUNIT RX	RF-324	12/02/2017
Rohde & Schwarz	Custom Filter Bank+PreAmp	SFUNIT RX	RF-323	12/06/2017
Rohde & Schwarz	Pre-Amp	TS-PR26	RF-042	12/05/2017
Rohde & Schwarz	Pre-Amp	TS-PR40	RF-200	12/05/2017
Rohde & Schwarz	Switch and Control Unit	OSP130	RF-018	12/02/2017
Rohde & Schwarz	Switch and Control Unit	OSP130	RF-249	12/06/2017
Rohde & Schwarz	Switch and Control Unit	OSP150	RF-019	12/02/2017
Rohde & Schwarz	Switch and Control Unit	OSP150	RF-250	12/06/2017
Murata	RF Cable	MXHQ87WA3000	RF-359	9/20/2017
Murata	RF Cable	MXHQ87WA3000	RF-392	9/20/2017
MegaPhase	RF Cable	EMC3-N1N1-394	EMC-1034	12/02/2017

Manufacturer	Description	Model #	Asset #	Calibration Due
Sucoflex	RF Cable	104PE	RF-430	12/02/2017
Huber & Suhner	RF Cable	SucoFlex 100	RF-350	1/4/2018
Huber & Suhner	RF Cable	PE7087-10	RF-341	1/26/2017
Huber & Suhner	RF Cable	SucoFlex 102A	RF-269	12/05/2017
Huber & Suhner	RF Cable	N/A	RF-599	12/06/2017
Madge Tech	THP Monitor	PRHT Temp 2000	EMC-679	11/15/2017
Madge Tech	THP Monitor	PRHT Temp 2000	EMC-681	10/25/2017
Micro-Coax	RF Cable	UFA142A	RF-088	10/05/2017
Micro-Coax	RF Cable	UTI Flex	RF-350	12/06/2017
Micro-Coax	RF Cable	UTI Flex	RF-359	12/02/2017
Micro-Coax	RF Cable	UTI Flex	RF-354	12/06/2017
Micro-Coax	RF Cable	UFB311A-1-0787-50U50U	EMC-351	12/02/2017
Teledyne	RF Cable	57500	EMC-1025	1/4/2018
Pasternack	Attenuator	PE7087-10	RF-125	1/26/2017
Pasternack	Attenuator	PE7087-10	RF-341	1/26/2017
Pasternack	Attenuator	2082	RF-304	1/26/2017
ETS-Lindgren	Antenna - Standard Gain	3160-09	RF-179	6/3/2017
Rohde & Schwarz	Software	EMC-32 V10.01.00	NA	NA

Note: Items with Calibration Due data marked as N/A are characterized before test, where applicable.

Equipment used for Line Conducted Emissions Measurement				
Manufacturer	Description	Model #	Asset #	Calibration Due
Rohde & Schwarz	EMI Test Receiver	ESR 3	EMC-669	4/14/2017
Teseq	Test LISN	NNB 51	EMC-057	6/22/2017
Teseq	AC LISN	NNB 51	EMC-056	5/3/2017
Micro-Coax	RF Cable	UFA210A-1-1800-50U50U	EMC-367	8/4/2017
Madge Tech	THP Monitor	PRHTemp2000	EMC-170	8/31/2017
ETS	TILE SW	Ver 7.1.3.60	EMC-985	N/A
Fluke	Multimeter	189	EMC-650	7/25/2017

Note: Items with Calibration Due data marked as N/A are characterized before test, where applicable.

8 Test Site Description

8.1 Radiated Emissions Test Site

Radiated measurements are performed in a 3m semi-anechoic chamber, which meets NSA requirements for the frequency range of 30MHz to 1000MHz. For measurements above 1 GHz, absorbers are laid out on the ground plane between the receiving antenna and the EUT to meet Site VSWR requirements in accordance with ANSI C63.4:2014.

8.1.1 Radiated Measurements in 30 MHz - 1000 MHz

The EUT is positioned on a turntable at a height of 80cm using a non-conducting table. A linearly polarized broadband antenna is positioned at 3m from the EUT periphery. The turntable is rotated 360 degrees and the antenna height varied from 1m to 4m to determine the highest emissions. This is repeated for both Horizontal and Vertical polarizations of the measurement antenna. All possible orientations of the EUT were investigated for emissions and the vertical standing mode was identified as the worst case configuration.

8.1.2 Radiated Measurements above 1GHz

The EUT is positioned on a Turntable at a height of 1.5m. A linearly polarized antenna is positioned at 3m from the EUT periphery. Guidelines in ANSI C63.10:2013 were followed with respect to maximizing the emissions. The measurement antenna is set at a fixed 1.5m height while the turntable is rotated 360 degrees and the EUT elevation angle is varied from 0 to 150 degrees to determine the highest emissions. This is repeated for both Horizontal and Vertical polarizations of the measurement antenna. Measurements above 18GHz were performed at a 3m distance.

8.2 Antenna port conducted measurements

All antenna port conducted measurements were performed on a bench-top setup consisting of a spectrum analyzer, power meter (as necessary), splitters/combiners (as necessary), attenuators, and pre-characterized RF cables.

The correction factors between the EUT and the spectrum analyzer were added internally in the analyzer settings, where applicable. The plots displayed takes into account these correction factors.

8.3 Test Setup Diagrams

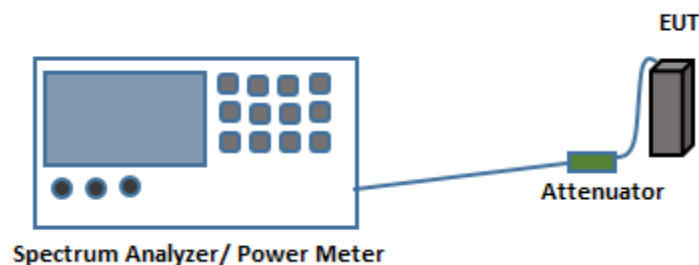


Figure 8-1. Test Setup for Antenna port conducted measurements

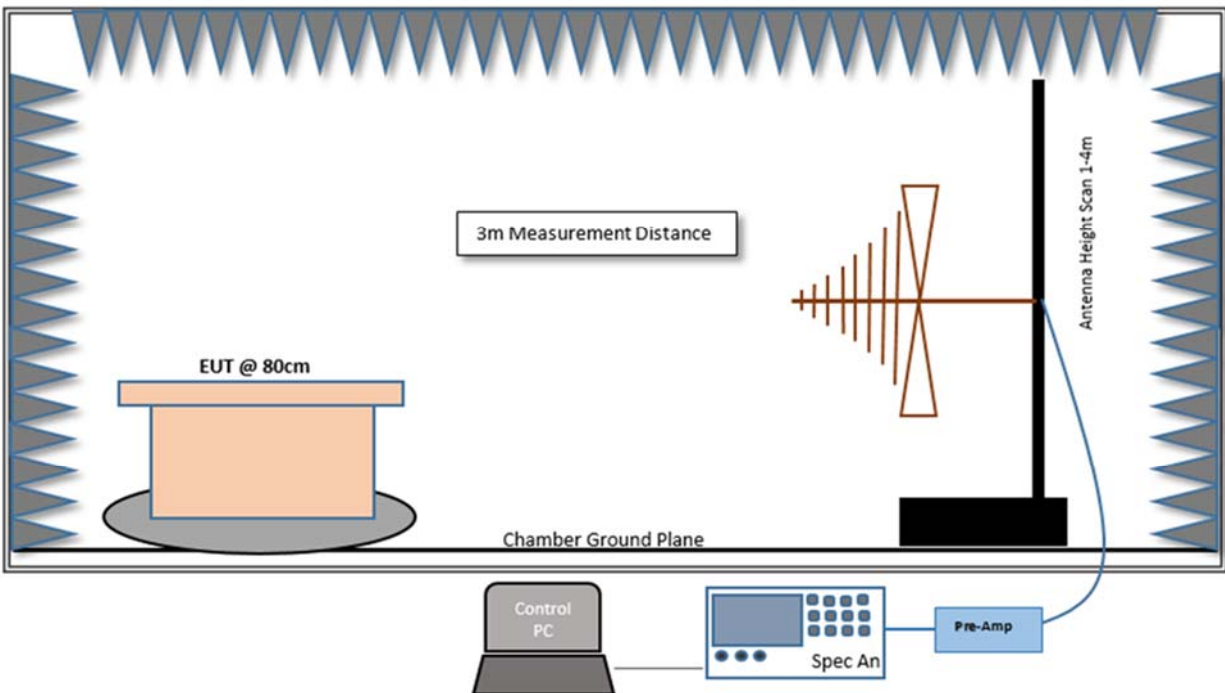


Figure 8-2. Test Setup for Radiated measurements in 30MHz- 1GHz Range

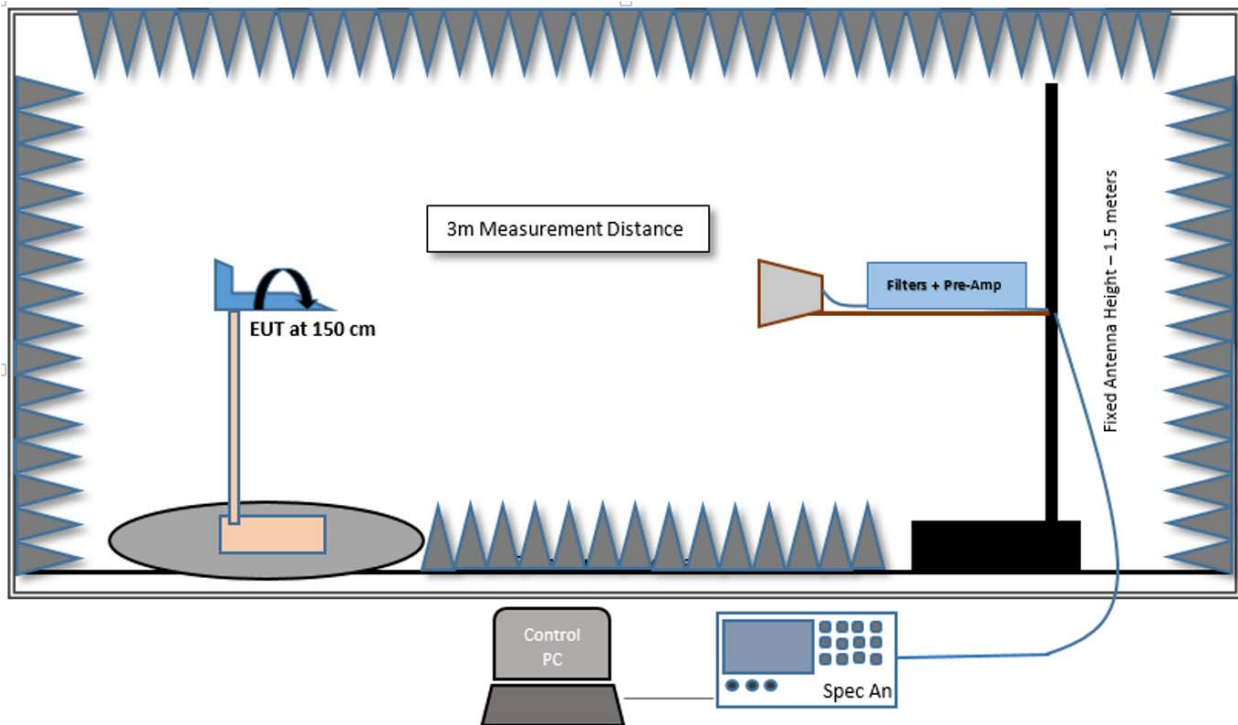


Figure 8-3. Test Setup for Radiated measurements in 1GHz- 18GHz Range

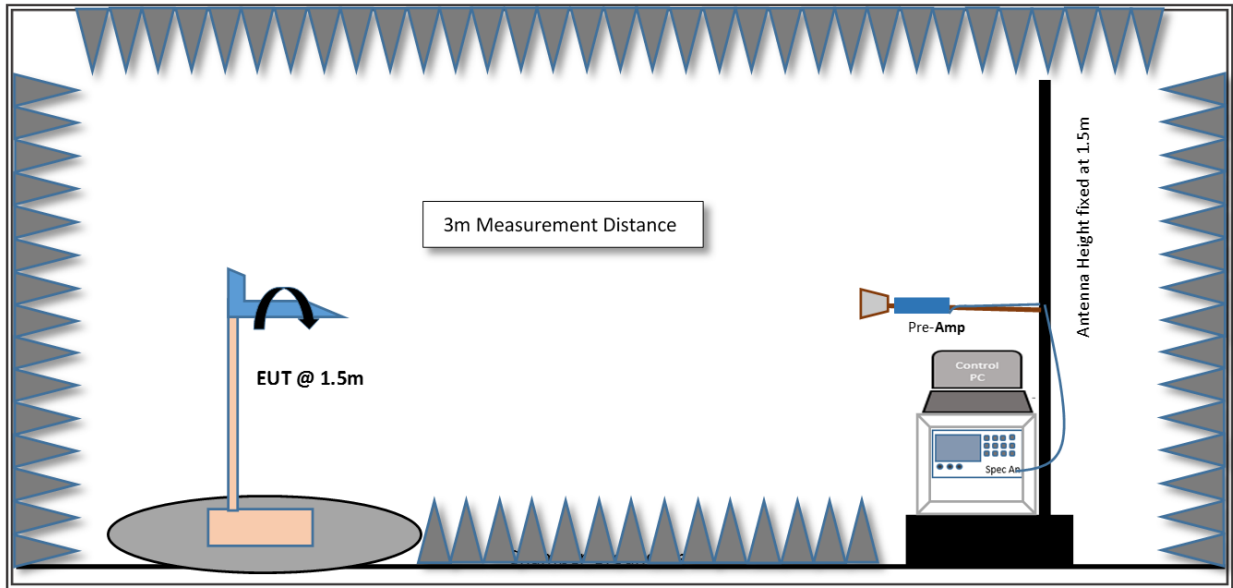


Figure 8-4. Test Setup for Radiated measurements >18GHz

9 Test Results- Conducted

9.1 26-dB Emission Bandwidth

9.1.1 Test Requirement:

FCC CFR 47 Rule Part 15.407 (a)
ISED RSS-247 [6.2.1]

9.1.2 Test Method:

Measurements were performed according to the procedures defined in KDB 789033- General UNII Test Procedures New Rules v01r03 and ANSI C63.10:2013.

Spectrum Analyzer settings:

RBW = approximately 1% of the Emissions Bandwidth

VBW \geq 3xRBW

Trace Mode= Peak Detector (Max Hold)

Sweep time= Auto

The in-built functionality of the Spectrum Analyzer is used to measure the 26-dB emission bandwidth.

9.1.3 Limits:

Reporting and measurement purposes only.

9.1.4 Test Results:

See Section 9.2.5.

9.2 99% Occupied Bandwidth

9.2.1 Test Requirement:

ISED RSS-247 [6.2]

9.2.2 Test Method:

Measurements were performed according to the procedures defined in KDB 789033- General UNII Test Procedures New Rules v01r03 and ANSI C63.10 2013.

Spectrum Analyzer settings:

Set the center frequency to the nominal EUT channel center frequency

Span = 1.5 to 5.0 time the 99% Occupied Bandwidth

RBW = 1% to 5% of the 99% Occupied Bandwidth

VBW \geq 3xRBW

Trace Mode= Peak Detector (Max Hold)

Sweep time= Auto

The built-in functionality of the Spectrum Analyzer is used to measure the 99% Occupied Bandwidth.

9.2.3 Limits:

Reporting and measurement purposes only.


9.2.4 Test Results:

See Section 9.2.5.


9.2.5 Test Data:

9.2.5.1 Chain A 802.11a 26-dB Emission Bandwidth


Chain A 802.11a 26-dB Emission Bandwidth				
Band	Channel No.	Frequency (MHz)	26-dB Emission Bandwidth (MHz)	99% Occupied BW (MHz)
UNII-1	36	5180	19.22	16.56
	44	5220	19.54	16.58
	48	5240	19.82	16.56
UNII-2A	52	5260	19.22	16.57
	60	5300	19.75	16.56
	64	5320	19.29	16.54
UNII-2C	100	5500	19.43	16.55
	116	5580	19.56	16.59
	140	5700	19.27	16.56
UNII-3	149	5745	19.67	16.58
	157	5785	19.36	16.54
	165	5825	19.39	16.54

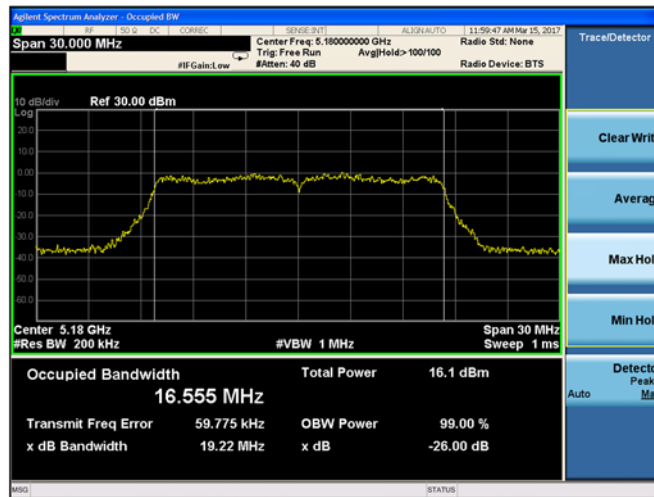


Plot 9-1. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 36)

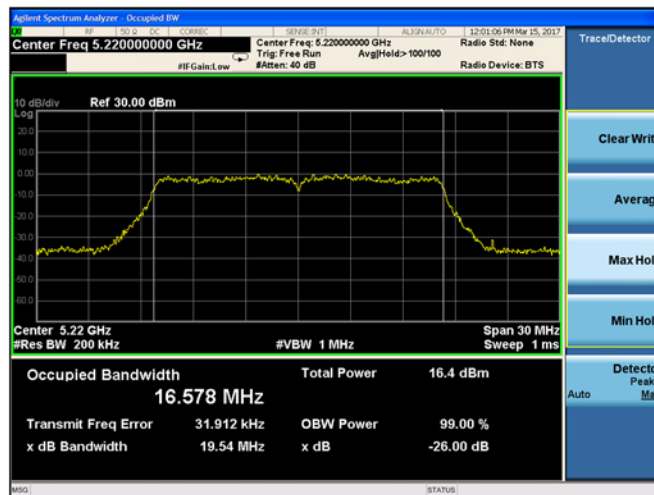


Plot 9-2. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 44)

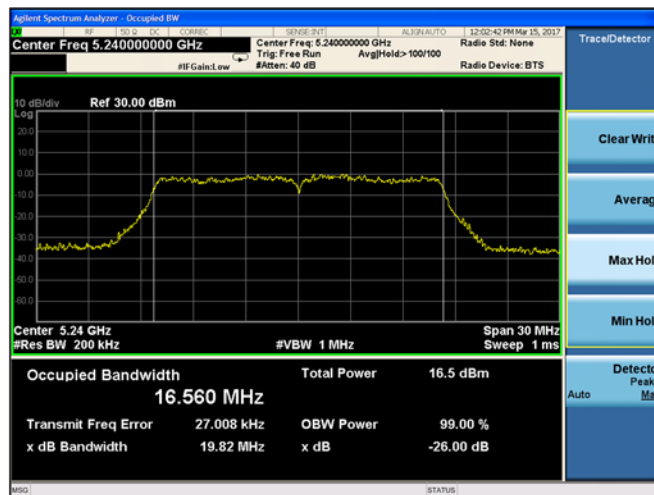


Plot 9-3 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 48)

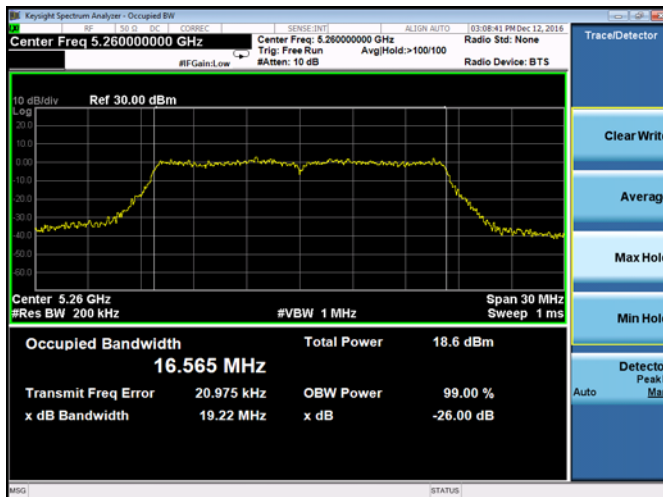


Plot 9-4. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 52)

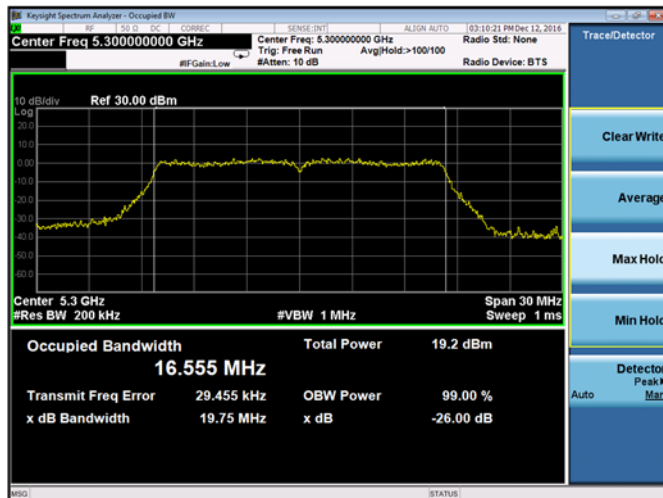

Plot 9-5. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 60)

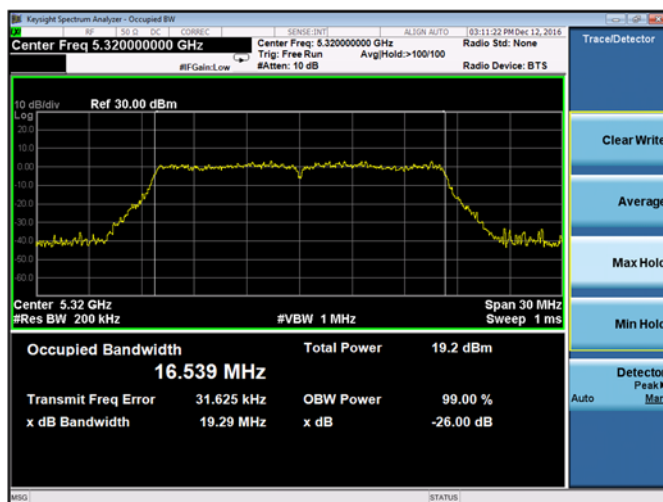


Plot 9-6. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 64)

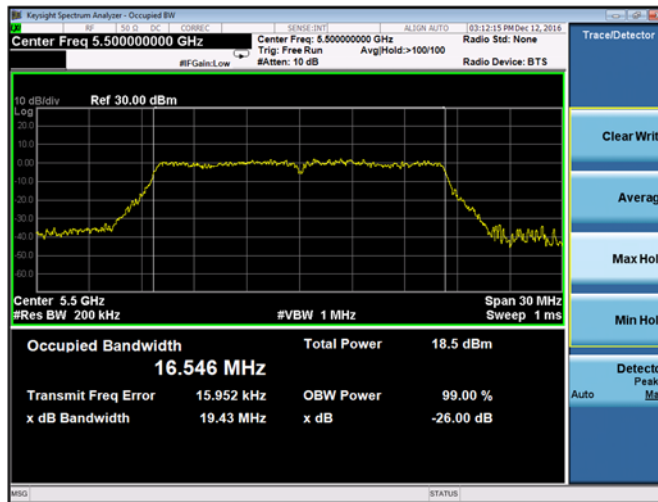


Plot 9-7 . 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 100)




Plot 9-8. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 116)

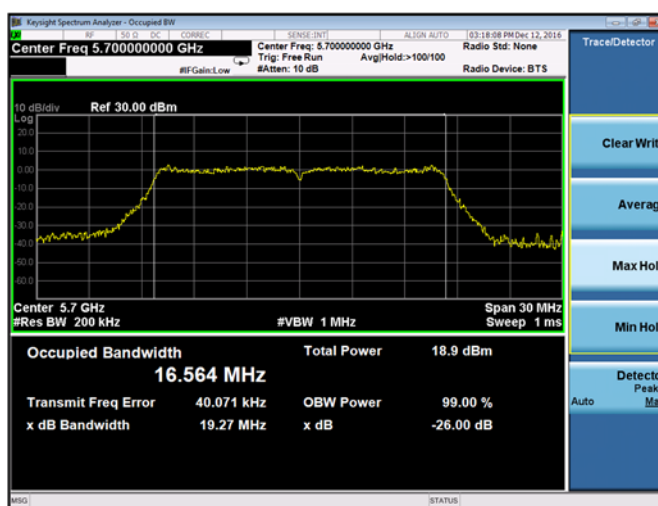


Plot 9-9. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 140)

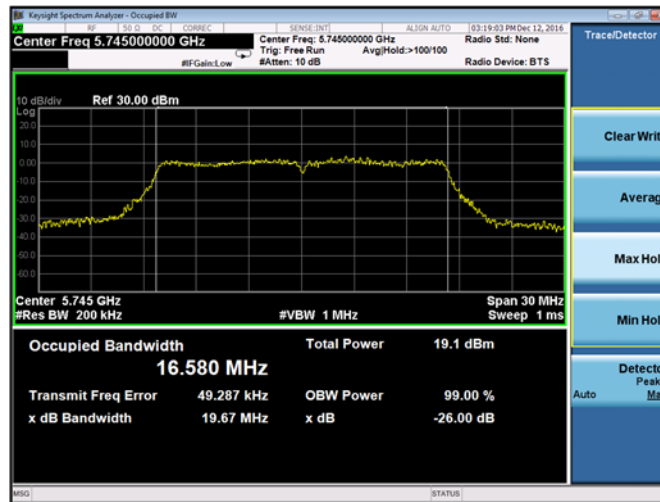

Plot 9-10. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 149)

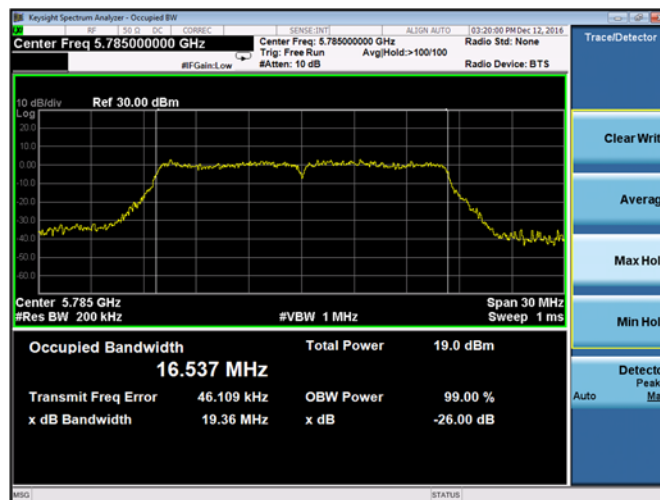


Plot 9-11. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 157)

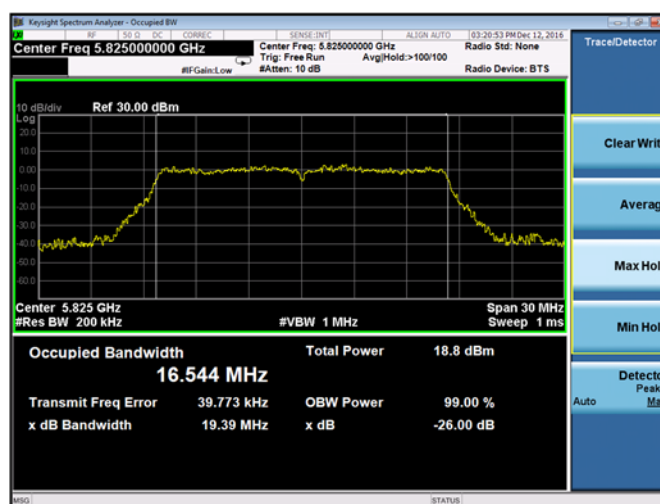


Plot 9-12. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11a (Ch. 165)

9.2.5.2 Chain B 802.11a 26-dB Emission Bandwidth


Chain B 802.11a 26-dB Emission Bandwidth				
Band	Channel No.	Frequency (MHz)	26-dB Emission Bandwidth (MHz)	99% Occupied BW (MHz)
UNII-1	36	5180	19.44	16.53
	44	5220	19.52	16.51
	48	5240	19.39	16.54
UNII-2A	52	5260	19.60	16.54
	60	5300	19.33	16.49
	64	5320	19.53	16.51
UNII-2C	100	5500	18.96	16.49
	116	5580	19.42	16.52
	140	5700	19.21	16.52
UNII-3	149	5745	19.16	16.49
	157	5785	19.32	16.51
	165	5825	19.31	16.52

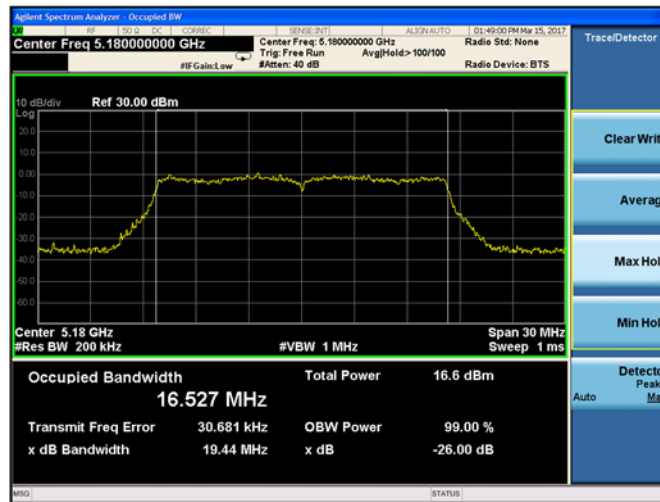


Plot 9-13. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 36)

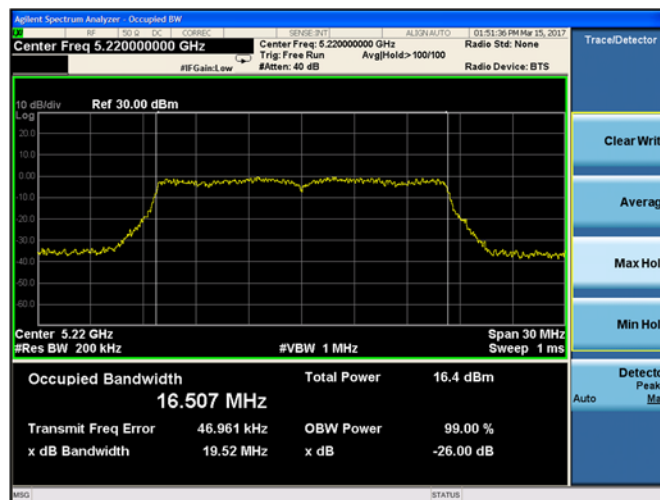


Plot 9-14. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 44)

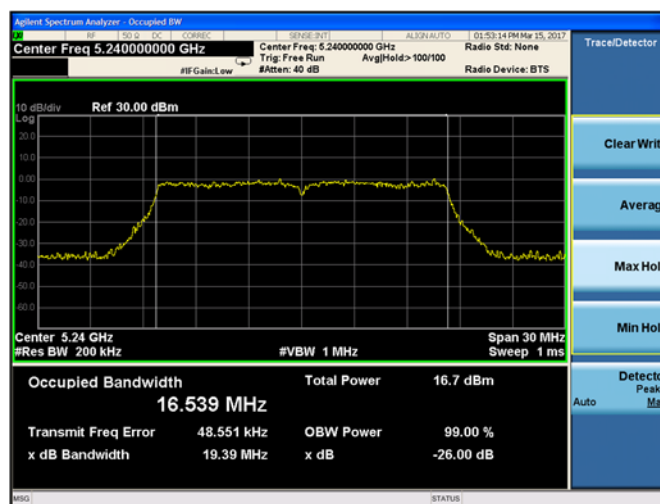


Plot 9-15. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 48)

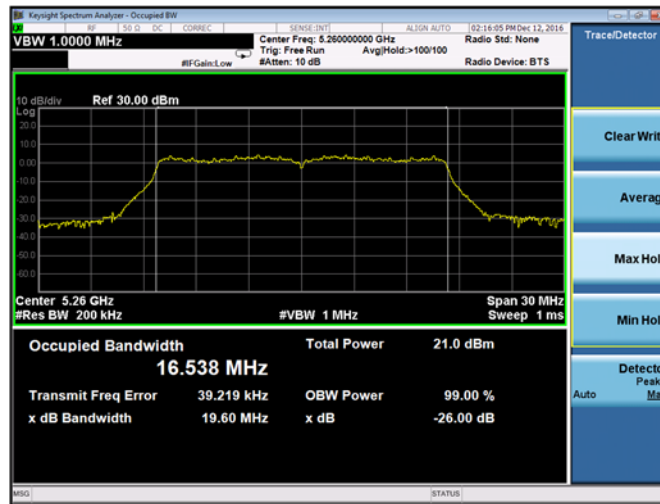


Plot 9-16. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 52)

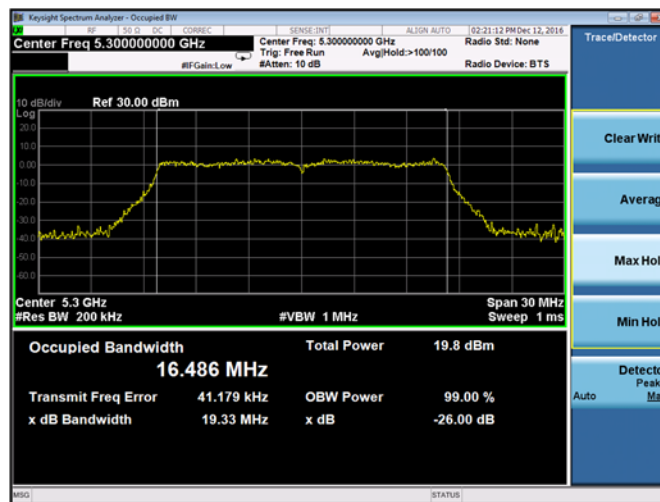


Plot 9-17. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 60)

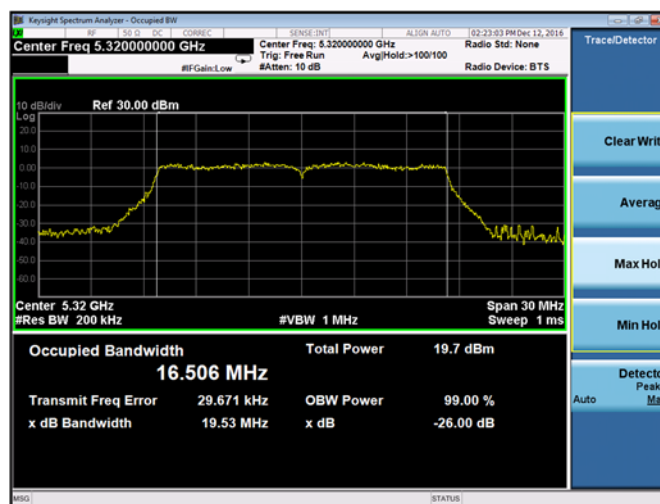

Plot 9-18. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 64)

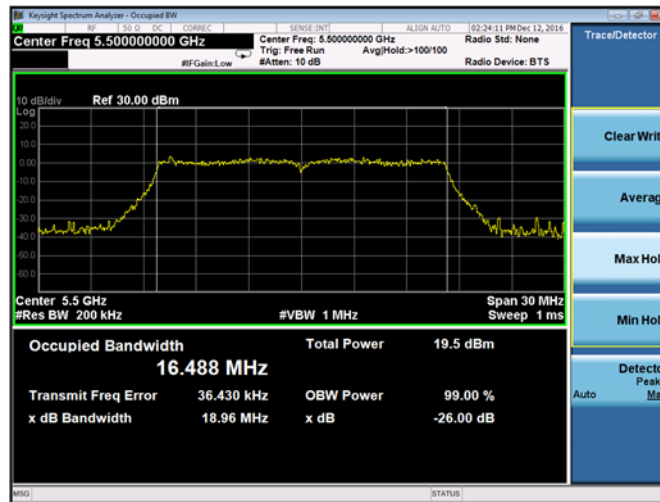


Plot 9-19. 26-dB Emission Bandwidth Chain and 99% OBW B 802.11a (Ch. 100)

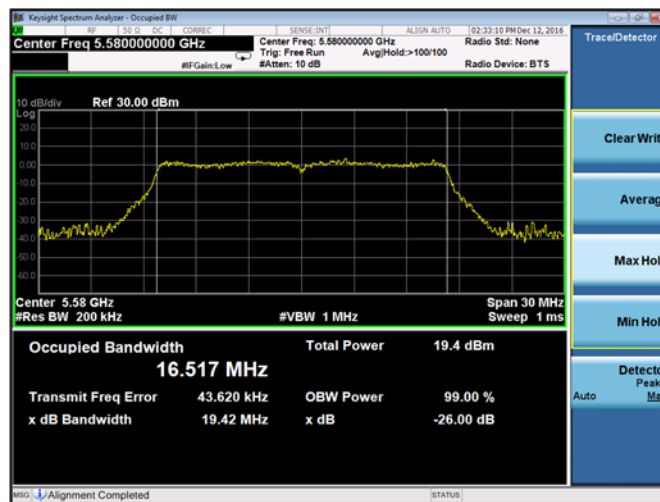


Plot 9-20. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 116)




Plot 9-21. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 140)

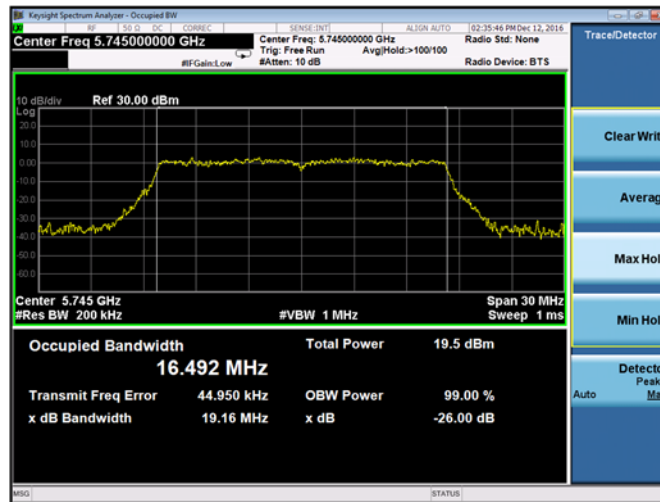

Plot 9-22. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 149)

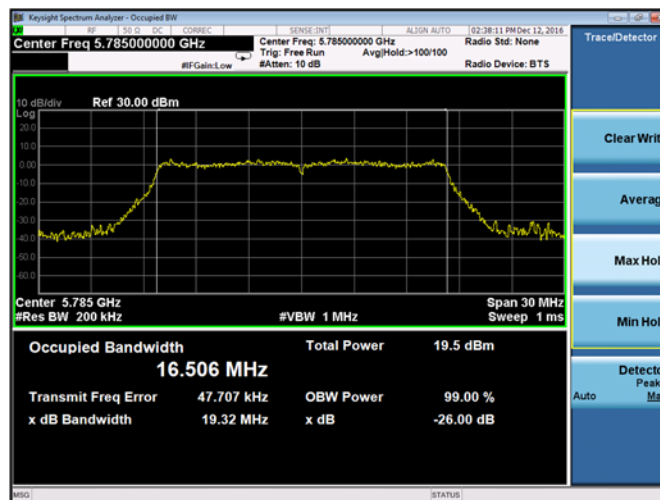


Plot 9-23. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 157)

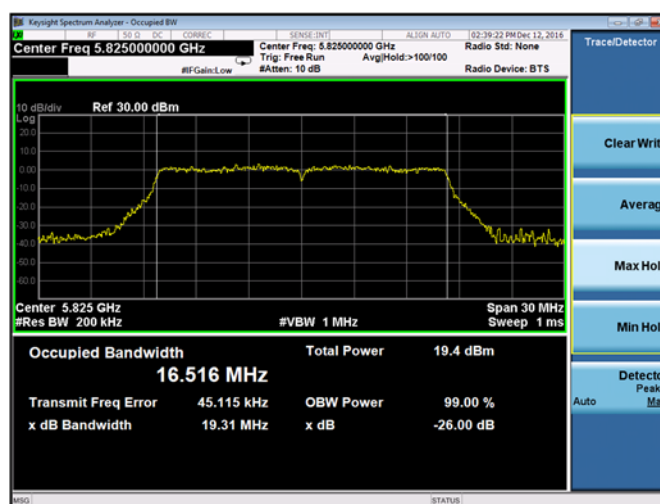


Plot 9-24. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11a (Ch. 165)

9.2.5.3 Chain A 802.11n HT20 26-dB Emission Bandwidth


Chain A 802.11n HT20 26-dB Emission Bandwidth				
Band	Channel No.	Frequency (MHz)	26-dB Emission Bandwidth (MHz)	99% Occupied BW (MHz)
UNII-1	36	5180	20.06	17.60
	44	5220	19.91	17.61
	48	5240	19.74	17.59
UNII-2A	52	5260	20.04	17.60
	60	5300	19.69	17.62
	64	5320	19.63	17.61
UNII-2C	100	5500	19.73	17.61
	116	5580	19.82	17.61
	140	5700	19.90	17.60
UNII-3	149	5745	20.12	17.63
	157	5785	19.92	17.59
	165	5825	19.94	17.62

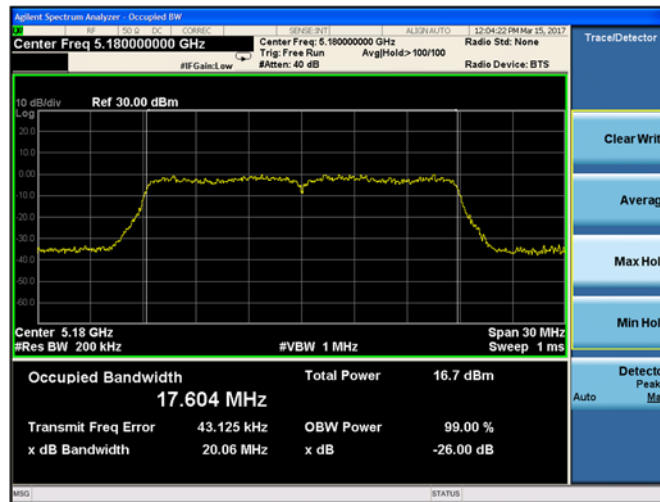


Plot 9-25. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 36)

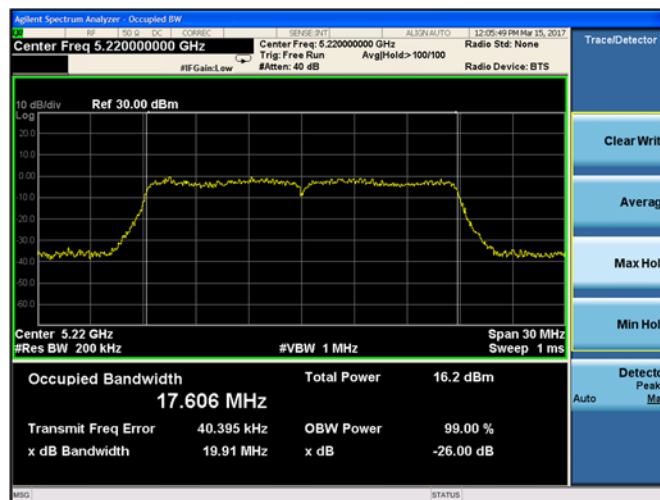


Plot 9-26. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 44)

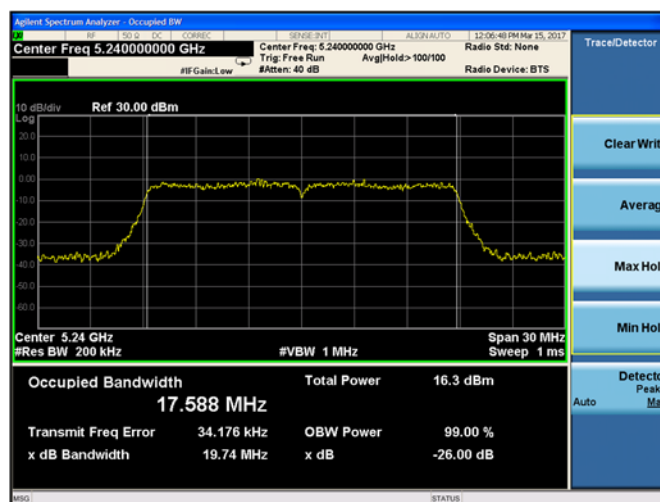


Plot 9-27. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 48)

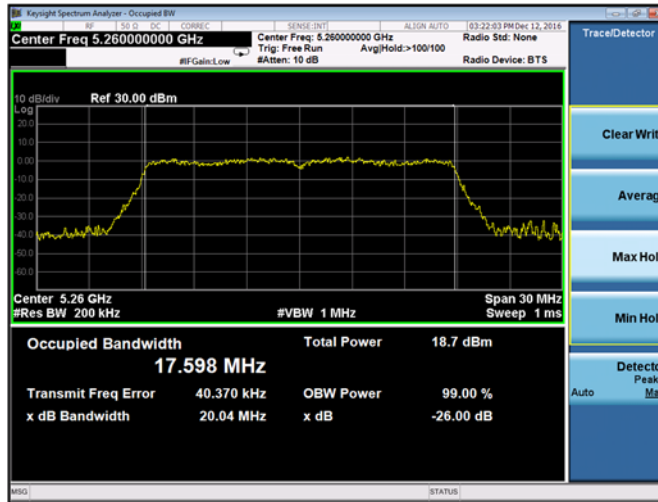


Plot 9-28. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 52)

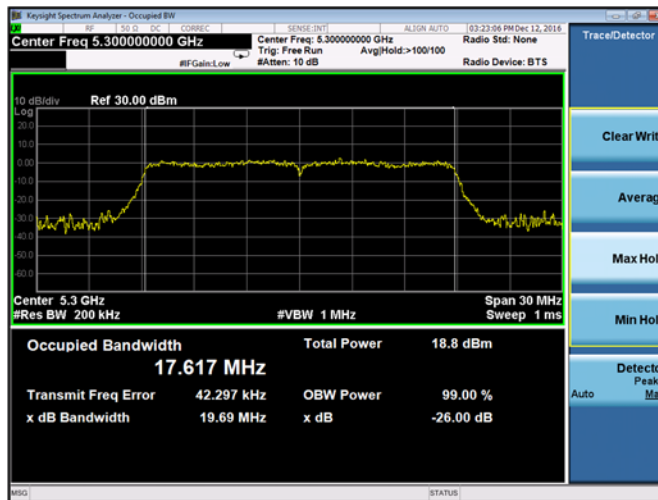


Plot 9-29. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 60)

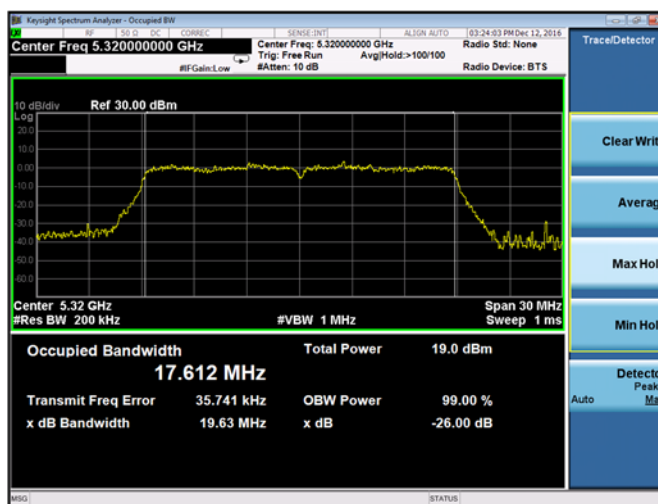


Plot 9-30. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 64)

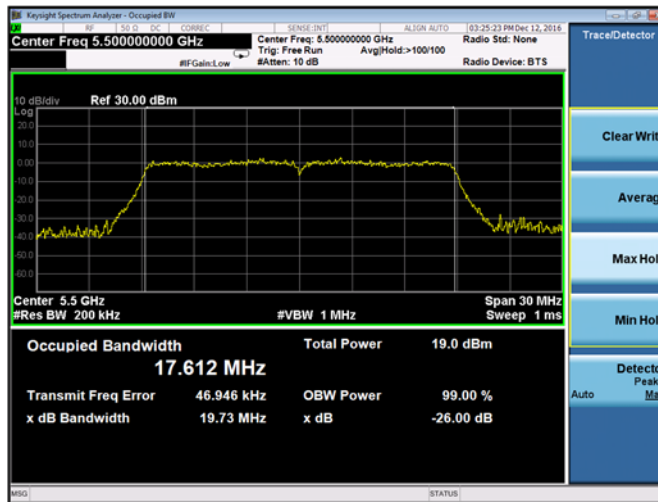


Plot 9-31. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 100)

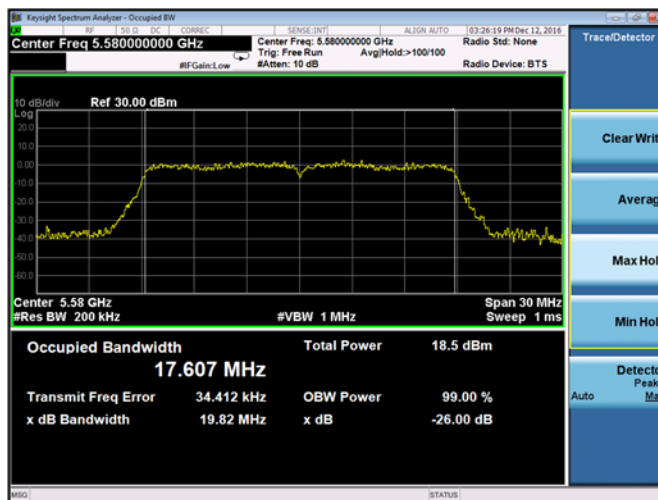


Plot 9-32. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 116)

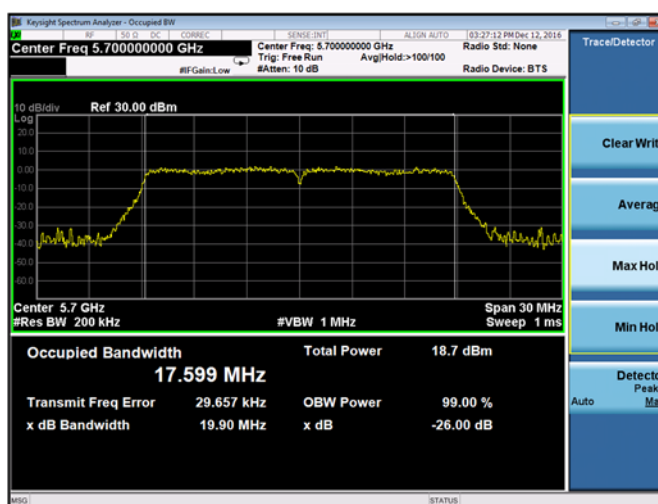


Plot 9-33. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 140)

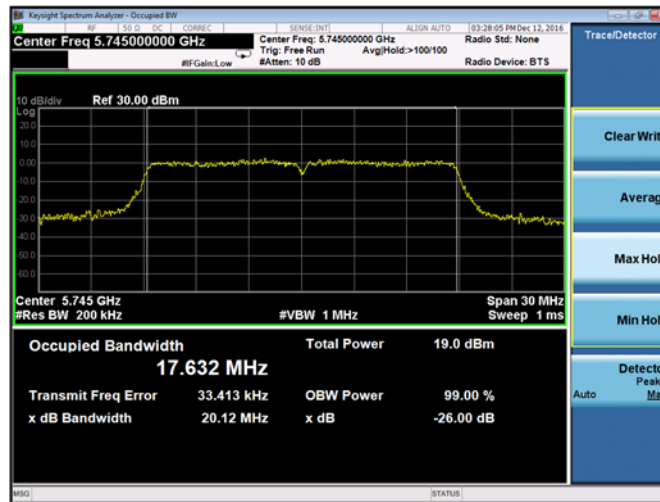

Plot 9-34. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 149)

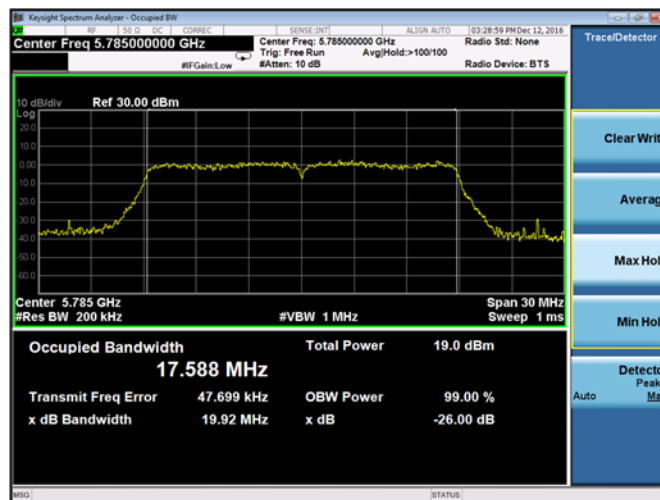


Plot 9-35. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 157)

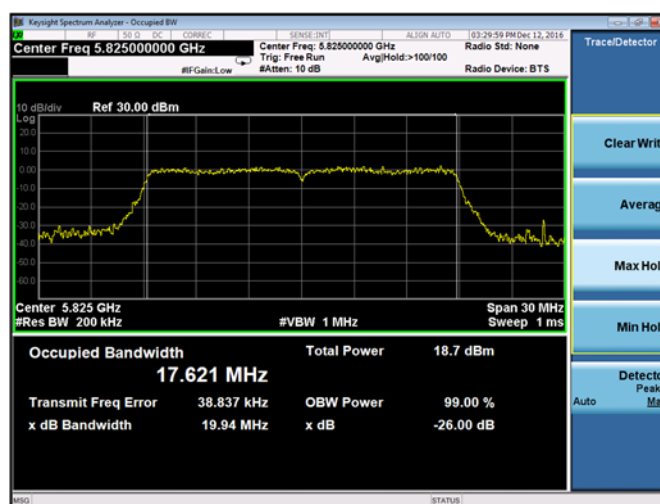


Plot 9-36. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT20 (Ch. 165)

9.2.5.4 Chain B 802.11n HT20 26-dB Emission Bandwidth


Chain B 802.11n HT20 26-dB Emission Bandwidth				
Band	Channel No.	Frequency (MHz)	26-dB Emission Bandwidth (MHz)	99% Occupied BW (MHz)
UNII-1	36	5180	20.00	17.61
	44	5220	20.01	17.62
	48	5240	20.15	17.62
UNII-2A	52	5260	19.89	17.62
	60	5300	19.86	17.61
	64	5320	19.71	17.62
UNII-2C	100	5500	19.76	17.60
	116	5580	19.83	17.62
	140	5700	19.79	17.60
UNII-3	149	5745	19.93	17.60
	157	5785	20.09	17.63
	165	5825	19.77	17.60

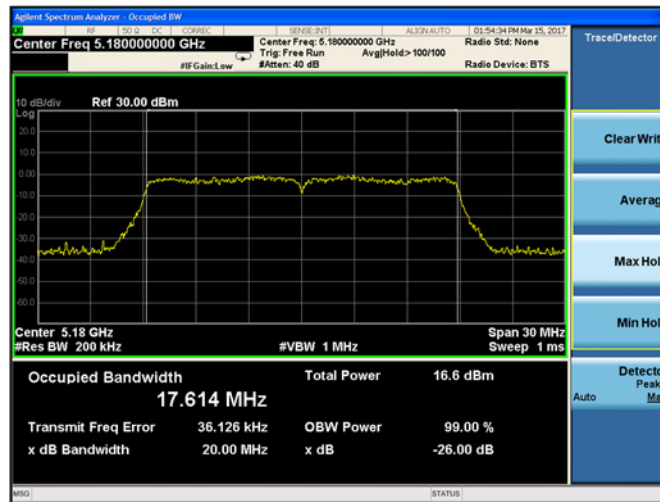


Plot 9-37. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 36)

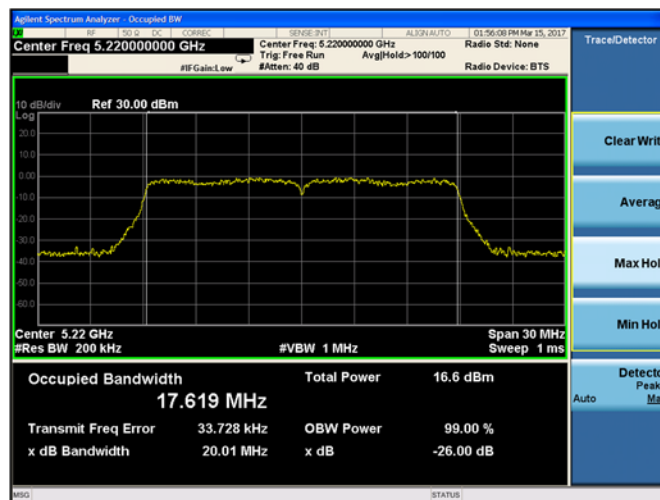


Plot 9-38. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 44)

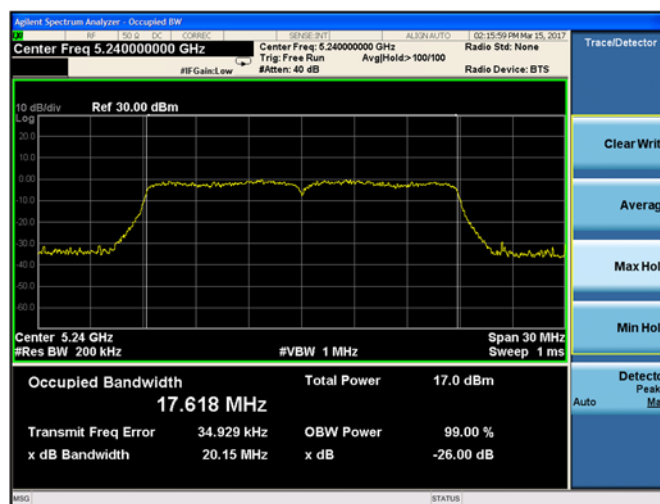

Plot 9-39. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 48)

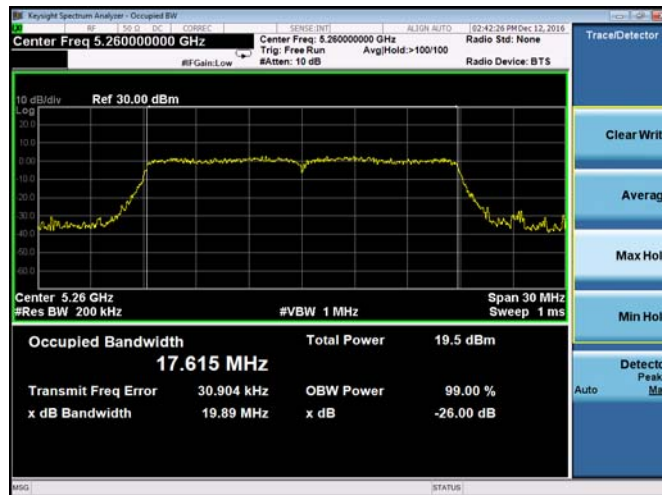

Plot 9-40. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 52)

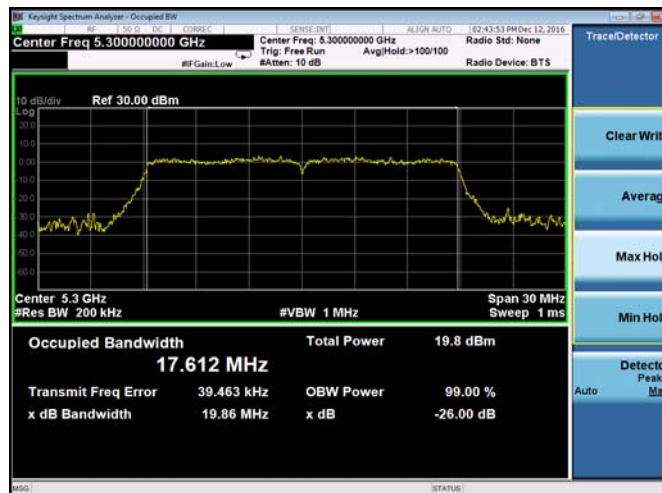


Plot 9-41. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 60)




Plot 9-42. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 64)




Plot 9-43. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 100)

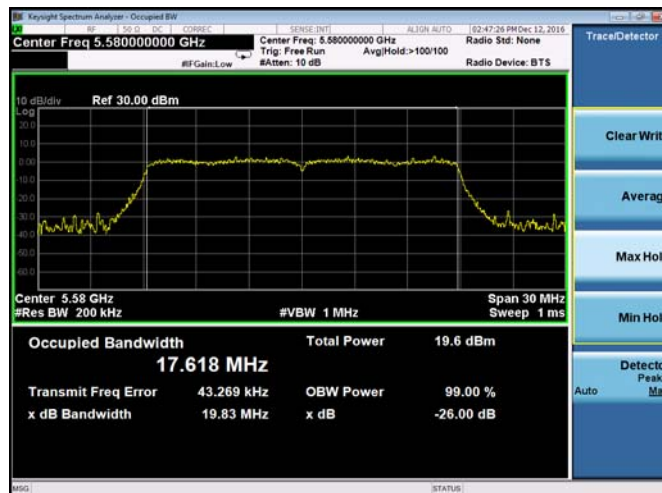


Plot 9-44. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 116)

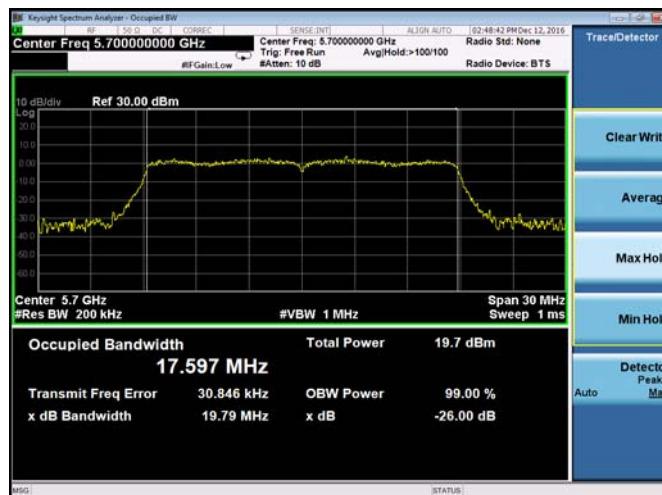

Plot 9-45. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 140)

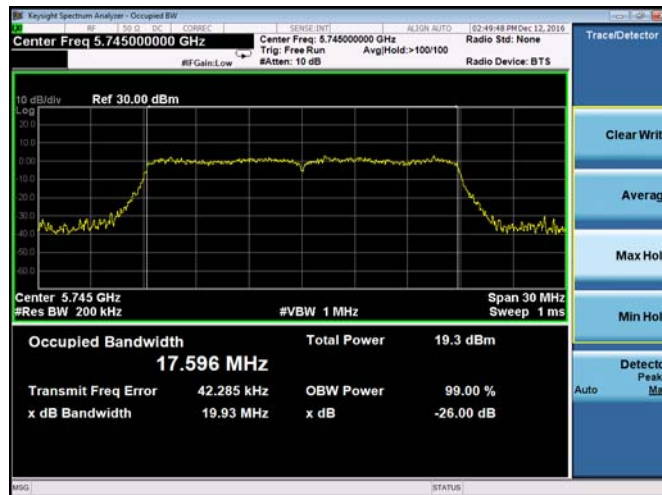

Plot 9-46. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 149)

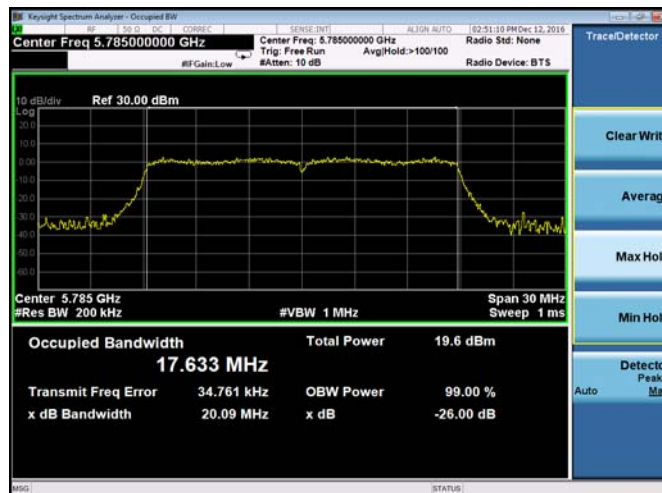


Plot 9-47. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 157)




Plot 9-48. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT20 (Ch. 165)

9.2.5.5 Chain A 802.11n HT40 26-dB Emission Bandwidth


Chain A 802.11n HT40 26-dB Emission Bandwidth				
Band	Channel No.	Frequency (MHz)	26-dB Emission Bandwidth (MHz)	99% Occupied BW (MHz)
UNII-1	38	5190	40.38	36.10
	46	5230	40.32	36.06
UNII-2A	54	5270	40.71	36.08
	62	5310	40.65	36.12
UNII-2C	102	5510	40.10	36.08
	110	5550	40.01	36.08
	134	5670	40.57	36.09
UNII-3	151	5755	40.05	36.05
	159	5795	40.65	36.10

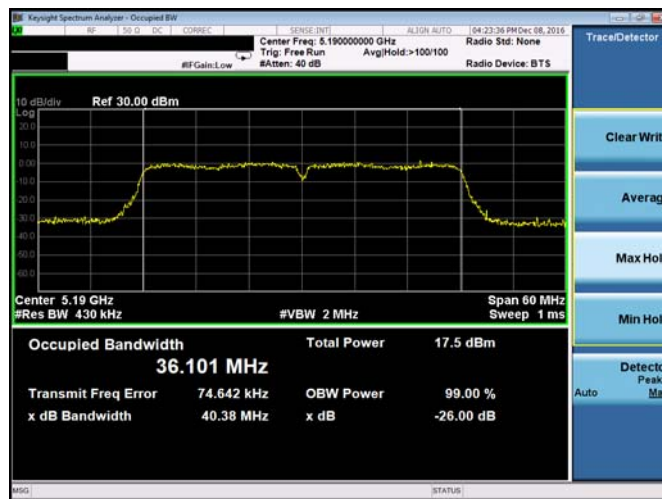


Plot 9-49. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 38)

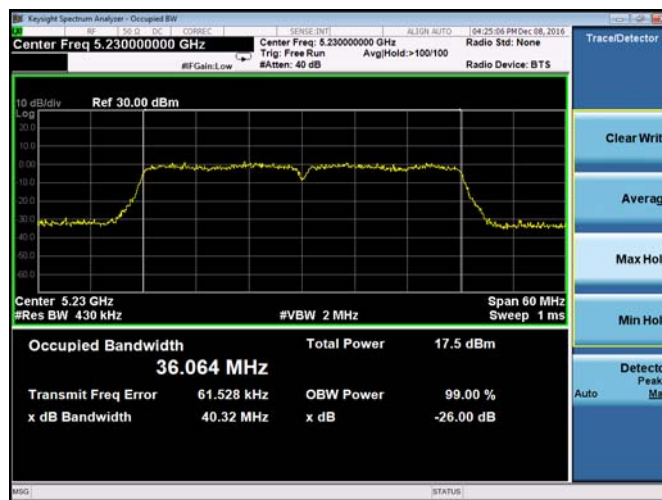


Plot 9-50. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 46)

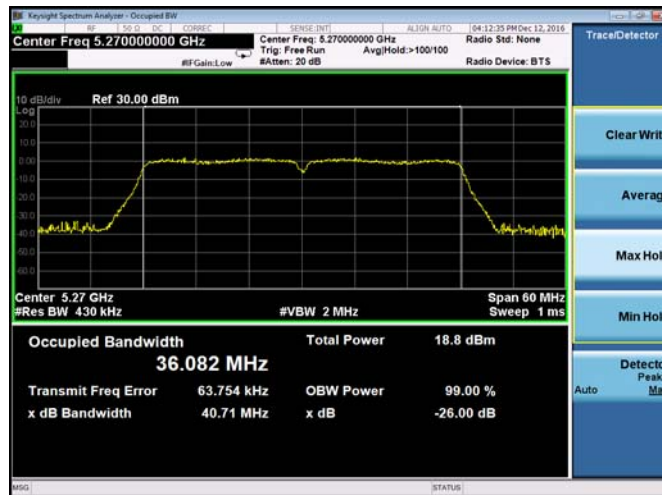


Plot 9-51. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 54)

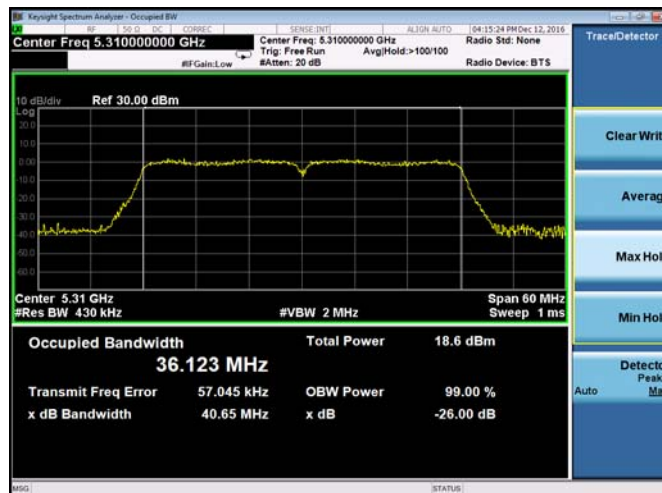


Plot 9-52. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 62)

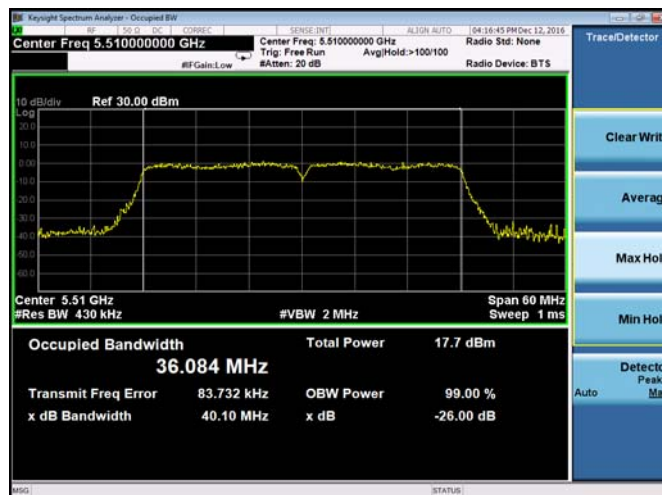

Plot 9-53. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 102)

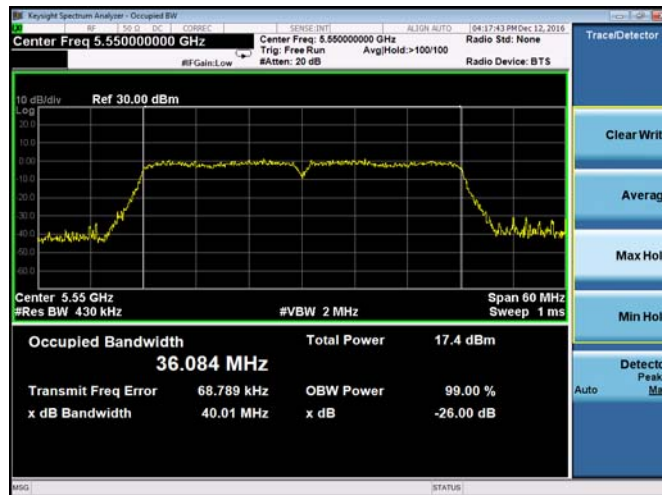


Plot 9-54. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 110)

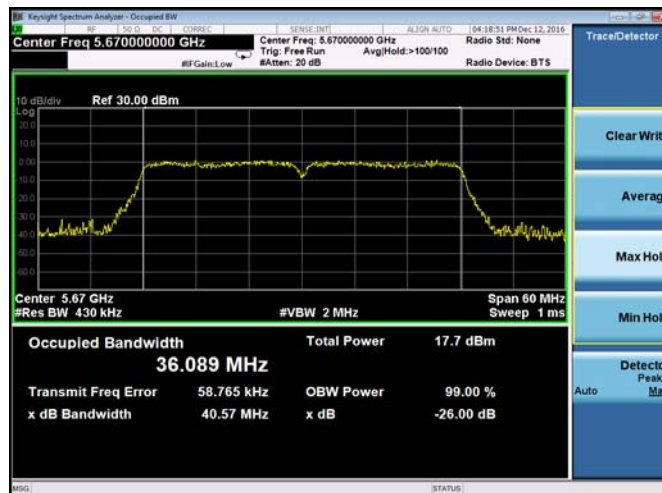

Plot 9-55. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 134)




Plot 9-56. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 151)

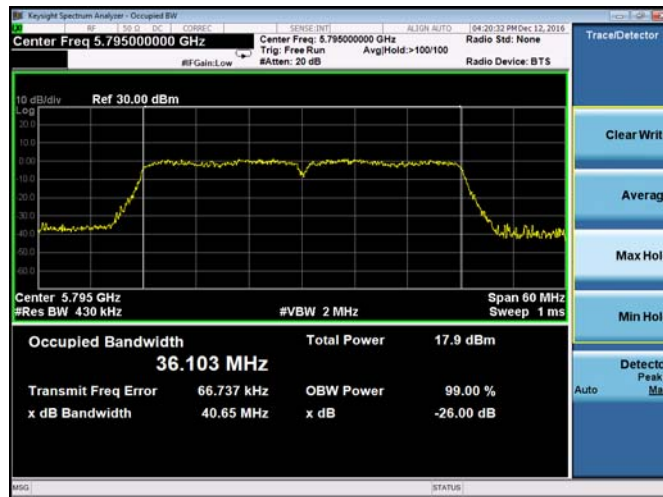


Plot 9-57. 26-dB Emission Bandwidth and 99% OBW Chain A 802.11n HT40 (Ch. 159)

9.2.5.6 Chain B 802.11n HT40 26-dB Emission Bandwidth


Chain B 802.11n HT40 26-dB Emission Bandwidth				
Band	Channel No.	Frequency (MHz)	26-dB Emission Bandwidth (MHz)	99% Occupied BW (MHz)
UNII-1	38	5190	39.74	36.11
	46	5230	39.38	36.10
UNII-2A	54	5270	39.34	36.12
	62	5310	39.56	36.07
UNII-2C	102	5510	39.68	36.09
	110	5550	39.46	36.11
	134	5670	39.60	36.09
UNII-3	151	5755	39.73	36.09
	159	5795	40.12	36.09

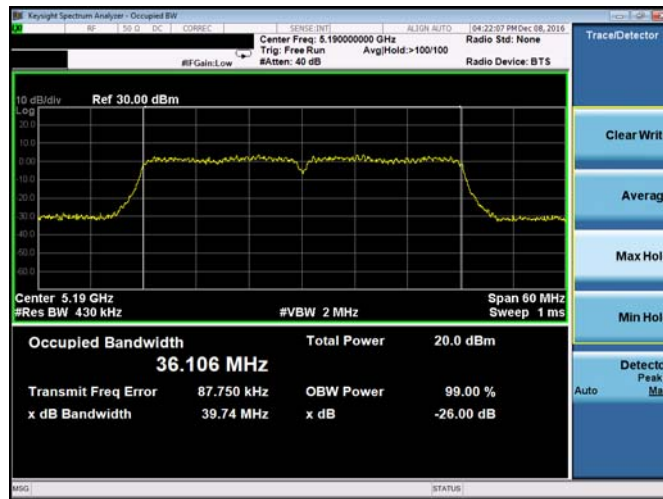


Plot 9-58. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 38)

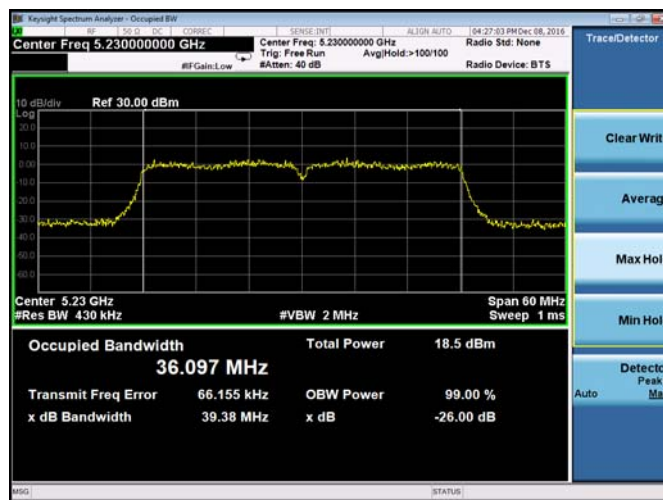


Plot 9-59. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 46)

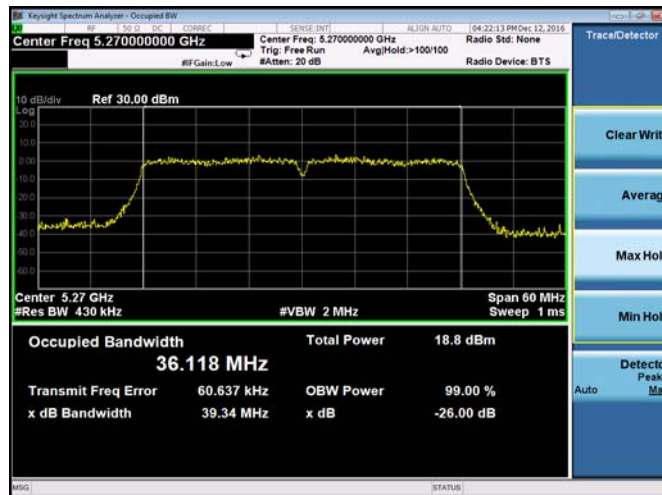


Plot 9-60. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 54)

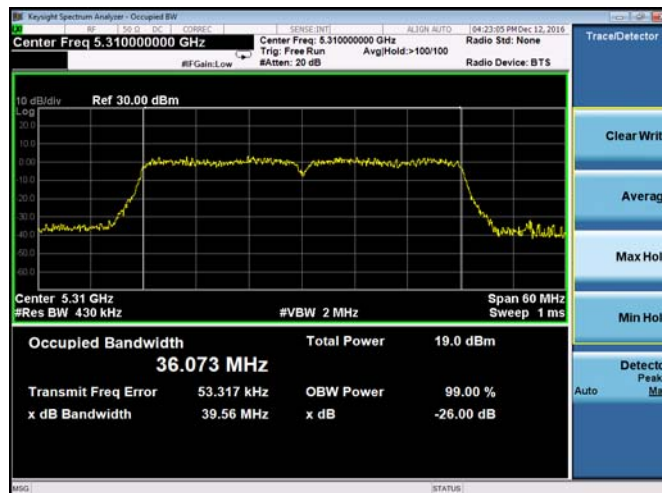

Plot 9-61. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 62)

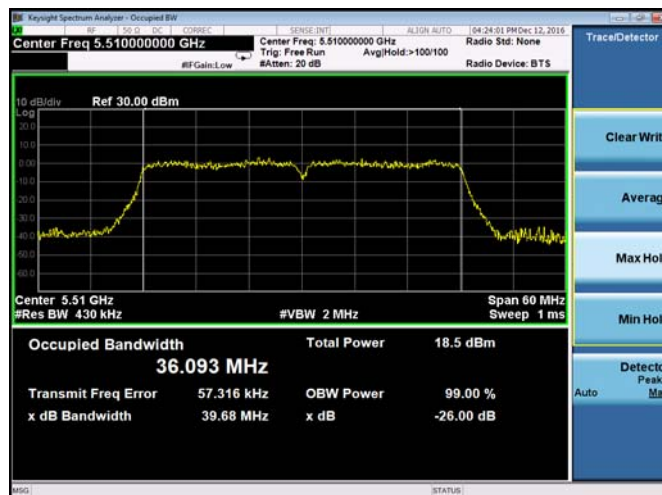


Plot 9-62. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 102)

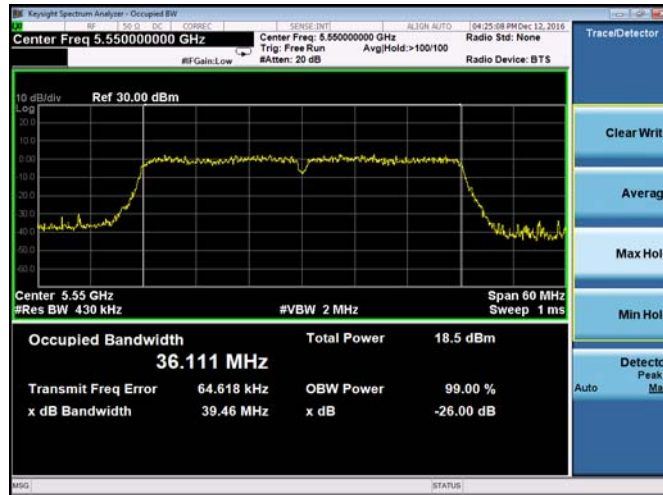


Plot 9-63. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 110)



Plot 9-64. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 134)

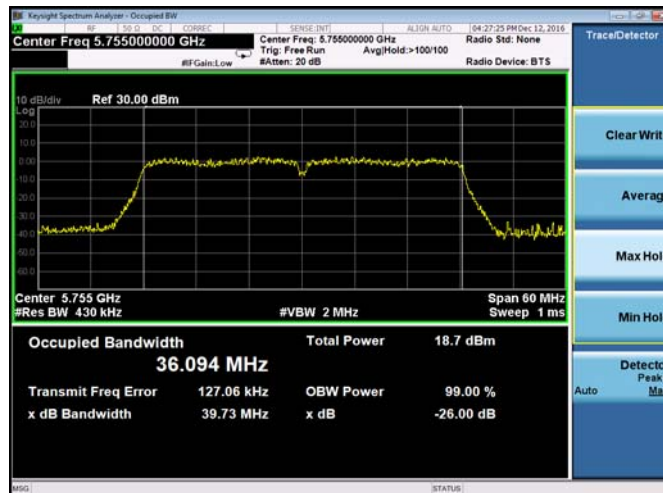


Plot 9-65. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 151)

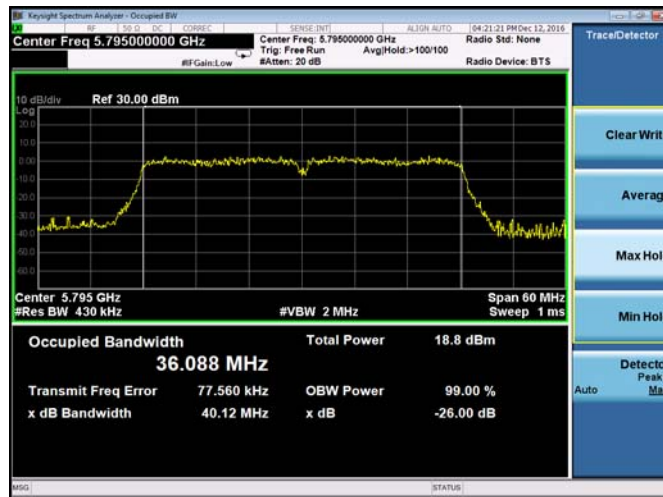


Plot 9-66. 26-dB Emission Bandwidth and 99% OBW Chain B 802.11n HT40 (Ch. 159)

9.2.5.7 Chain A 802.11ac VHT20 26-dB Emission Bandwidth


Chain A 802.11ac VHT 20 26-dB Emission Bandwidth				
Band	Channel No.	Frequency (MHz)	26-dB Emission Bandwidth (MHz)	99% Occupied BW (MHz)
UNII-1	36	5180	19.93	17.61
	44	5220	19.94	17.60
	48	5240	20.08	17.61
UNII-2A	52	5260	20.15	17.59
	60	5300	20.06	17.60
	64	5320	19.74	17.60
UNII-2C	100	5500	19.72	17.59
	116	5580	19.72	17.61
	140	5700	19.82	17.59
UNII-3	149	5745	19.94	17.63
	157	5785	20.01	17.61
	165	5825	19.78	17.58

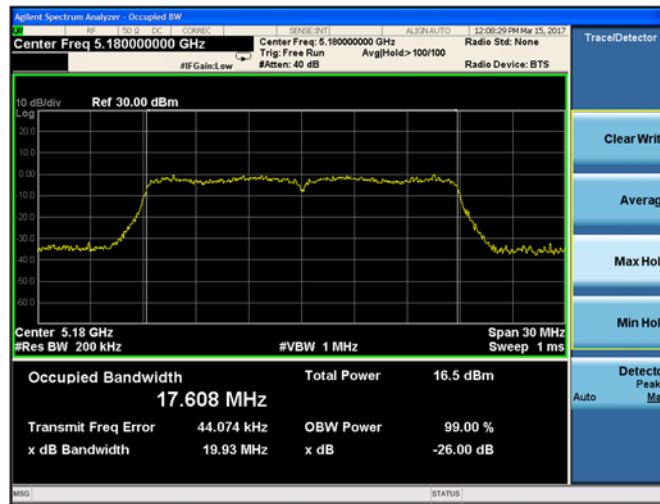


Plot 9-67. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 36)

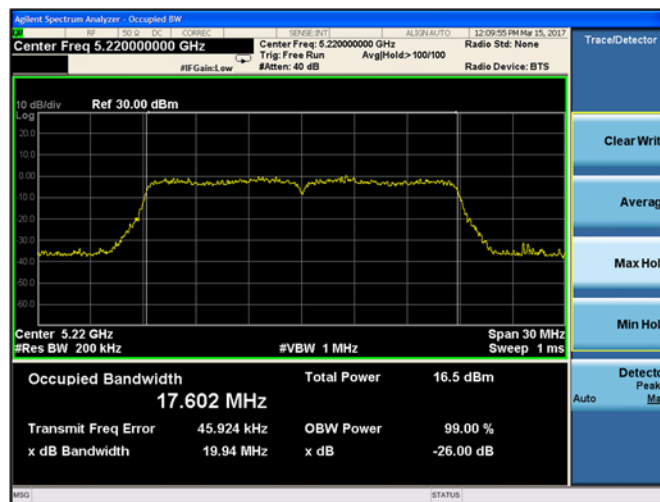


Plot 9-68. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 44)

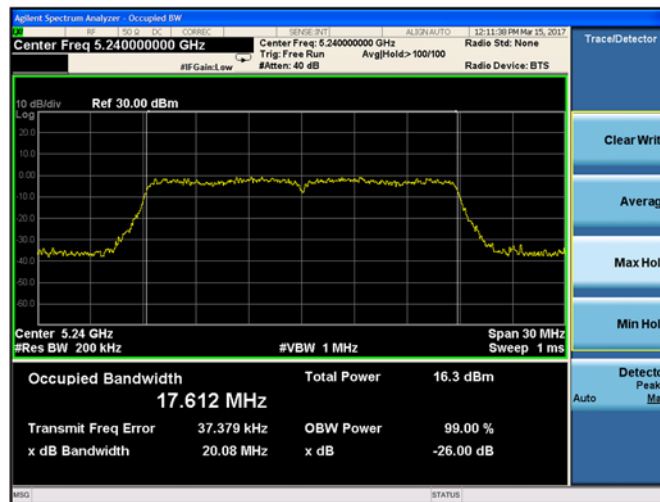


Plot 9-69. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 48)

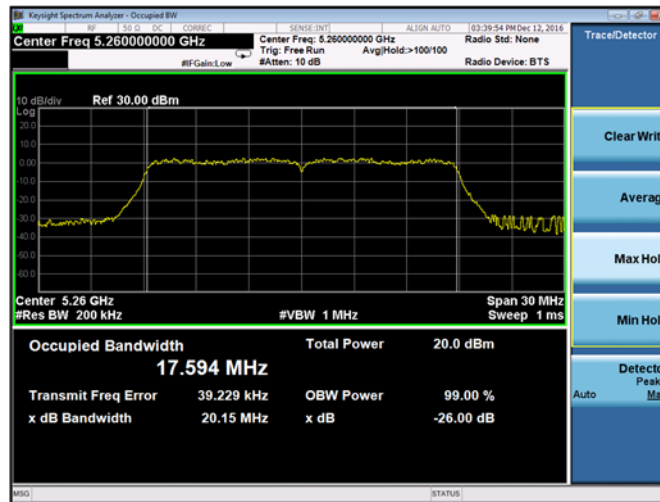


Plot 9-70. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 52)

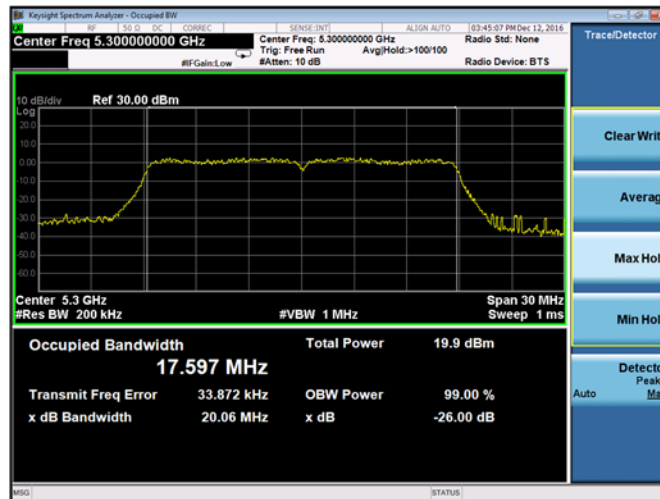


Plot 9-71. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 60)

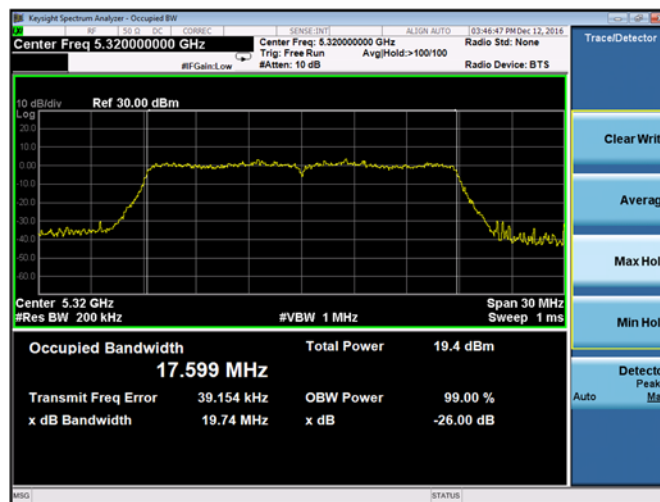


Plot 9-72. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 64)

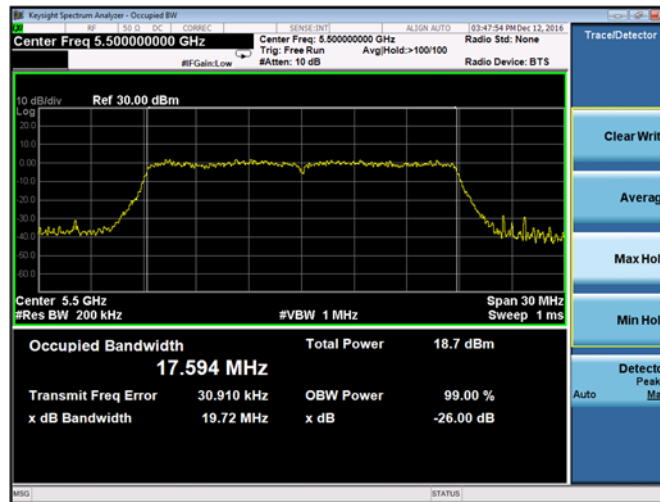

Plot 9-73. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 100)

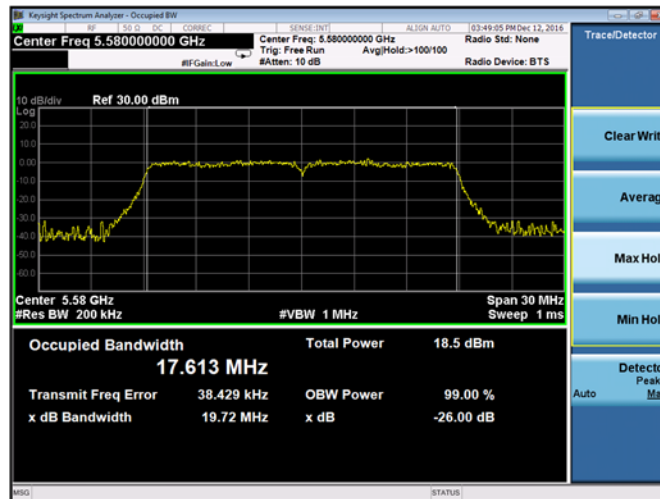

Plot 9-74. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 116)

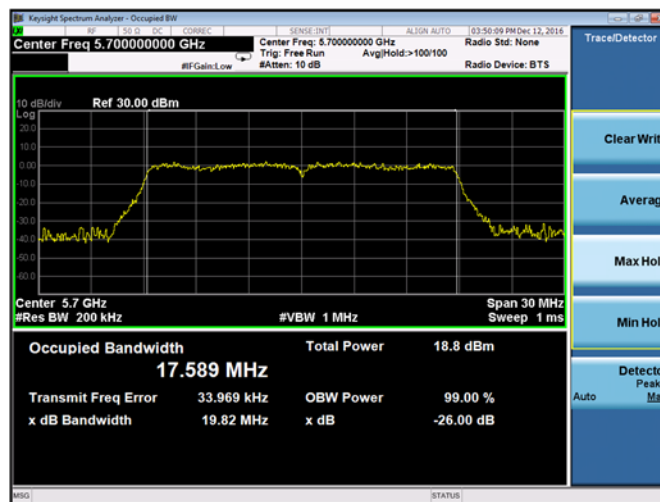

Plot 9-75. 26dB Emission Bandwidth and 99% OBW Chain A 802.11ac VHT 20 (CH. 140)