







802.11a – Channel 116

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3720.31 PK	55.11	74	-18.89	-46.95	6.8	-40.15
2	3720.31 AV	34.69	54	-19.31	-67.37	6.8	-60.57
3	7446.87 PK	54.85	74	-19.15	-47.21	6.8	-40.41
4	7440.62 AV	38.4	54	-15.6	-63.66	6.8	-56.86
5	11159.37 PK	52.81	74	-21.19	-49.25	6.8	-42.45
6	11164.06 AV	34.34	54	-19.66	-67.72	6.8	-60.92
7	16743 PK	63.09	68.2	-5.11	-38.97	6.8	-32.17

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

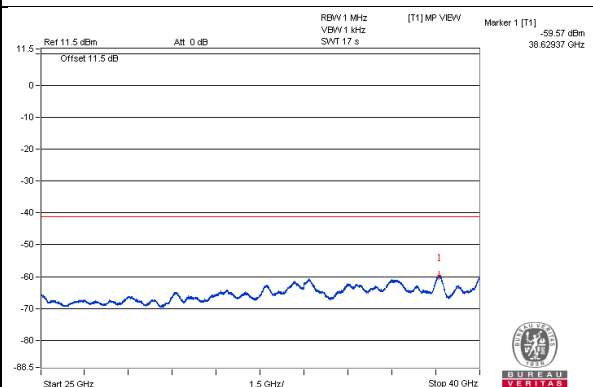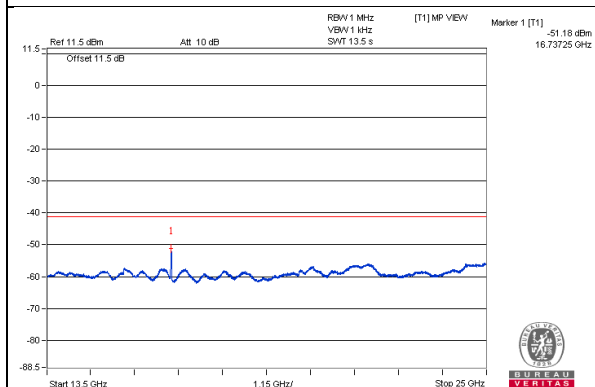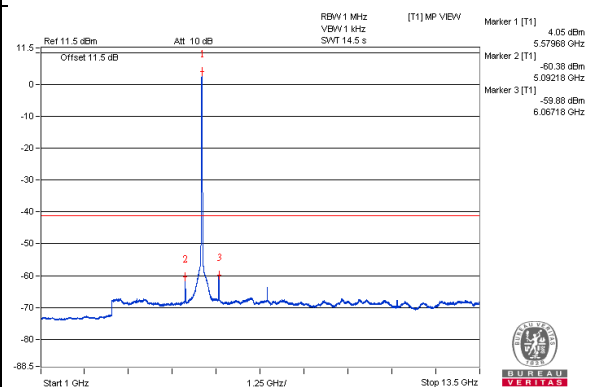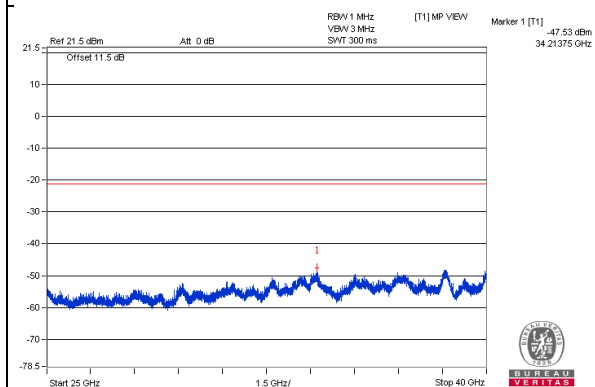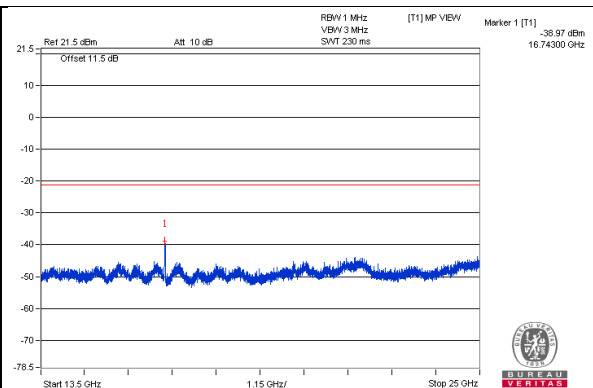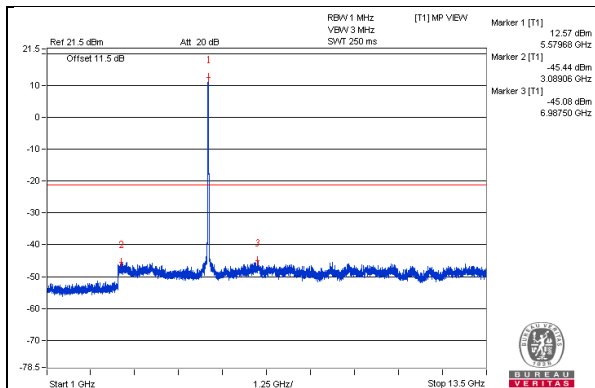


Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5466.15 PK	56.98	74	-17.02	-45.08	6.8	-38.28
2	5469.71 AV	44.22	54	-9.78	-57.84	6.8	-51.04

Note :

$$\text{Emission Level (dBUV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

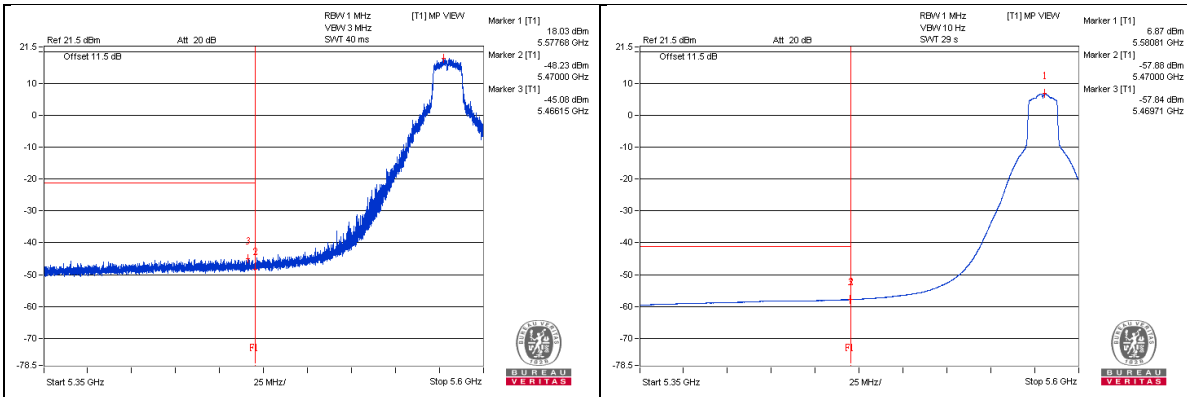

802.11a – Channel 140







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.87 PK	55.43	74	-18.57	-46.63	6.8	-39.83
2	3800 AV	34.79	54	-19.21	-67.27	6.8	-60.47
3	7596.87 PK	54.66	74	-19.34	-47.4	6.8	-40.6
4	7600 AV	36.38	54	-17.62	-65.68	6.8	-58.88
5	11395.31 PK	56.53	74	-17.47	-45.53	6.8	-38.73
6	11401.56 AV	40.77	54	-13.23	-61.29	6.8	-54.49
7	17102.37 PK	62.91	68.2	-5.29	-39.15	6.8	-32.35

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

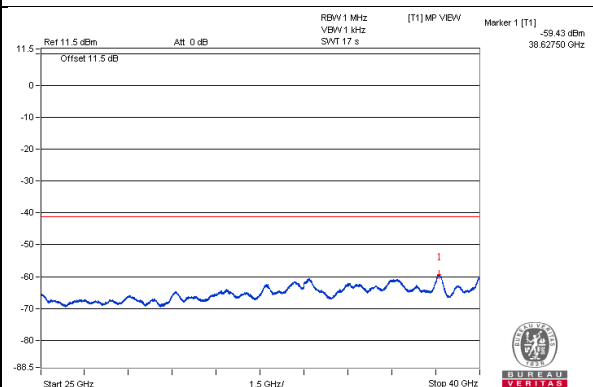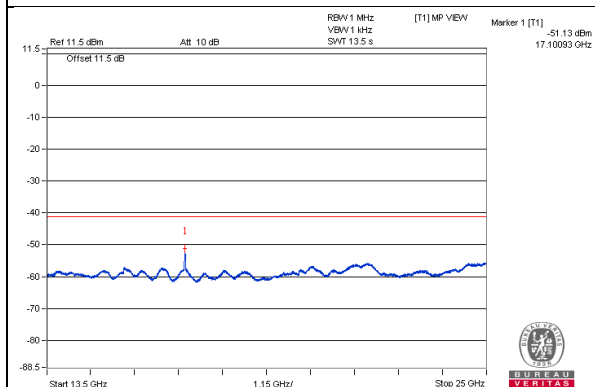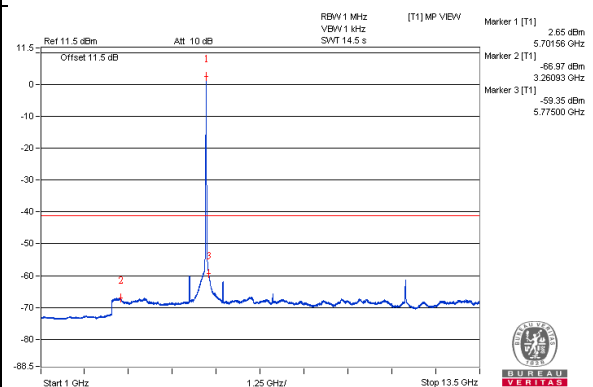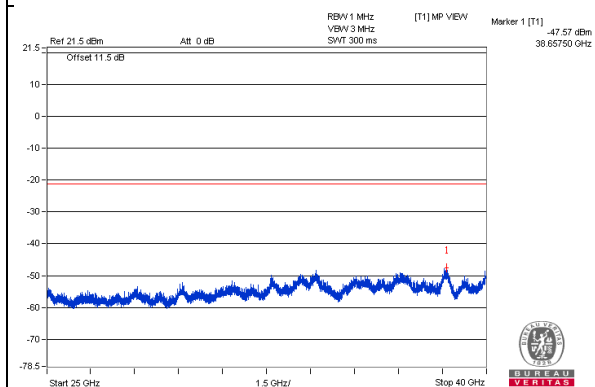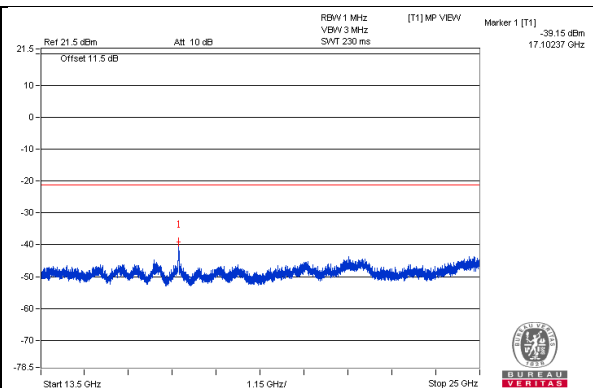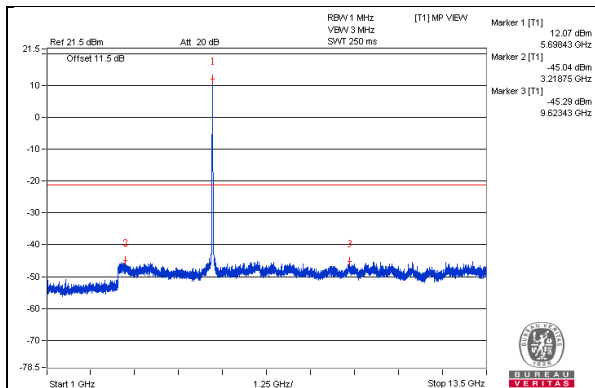


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5728.15 PK	70.65	74	-3.35	-31.41	6.8	-24.61
2	5725 AV	53.94	54	-0.06	-48.12	6.8	-41.32

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

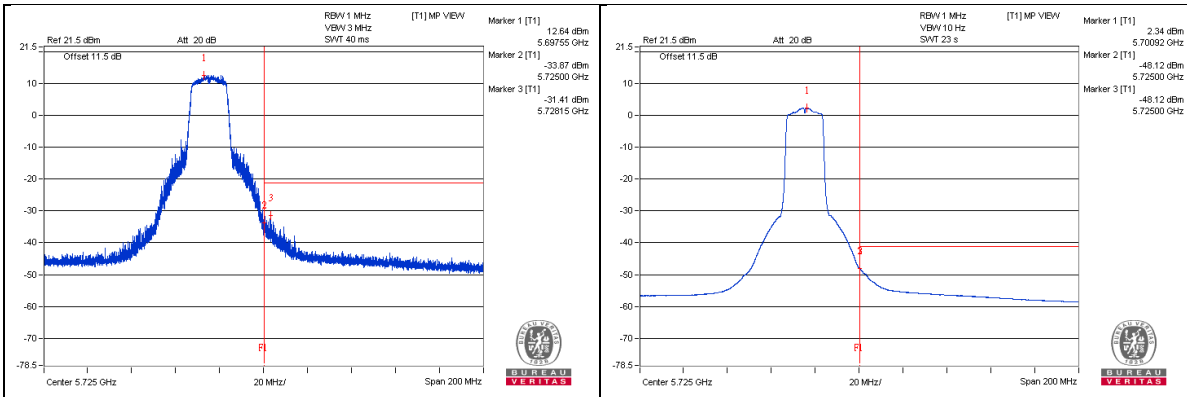

802.11a – Channel 144







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.25 PK	55.26	74	-18.74	-46.8	6.8	-40
2	3812.5 AV	34.56	54	-19.44	-67.5	6.8	-60.7
3	7634.37 PK	54.28	74	-19.72	-47.78	6.8	-40.98
4	7626.56 AV	36.11	54	-17.89	-65.95	6.8	-59.15
5	11446.87 PK	56.04	74	-17.96	-46.02	6.8	-39.22
6	11442.18 AV	41.52	54	-12.48	-60.54	6.8	-53.74
7	17164.18 PK	67.45	68.2	-0.75	-34.61	6.8	-27.81

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

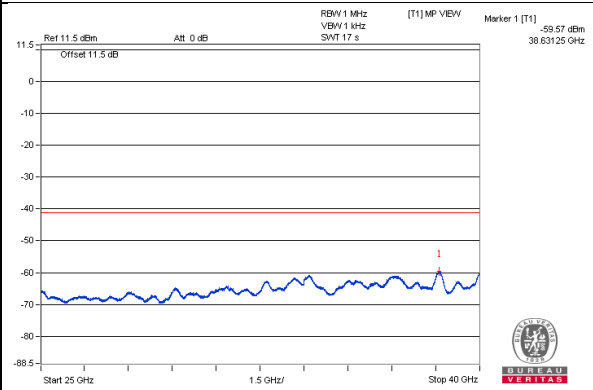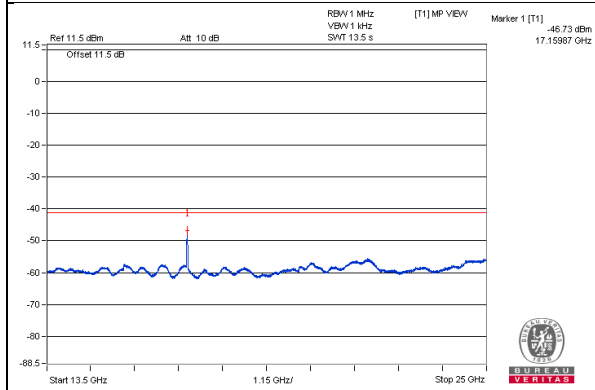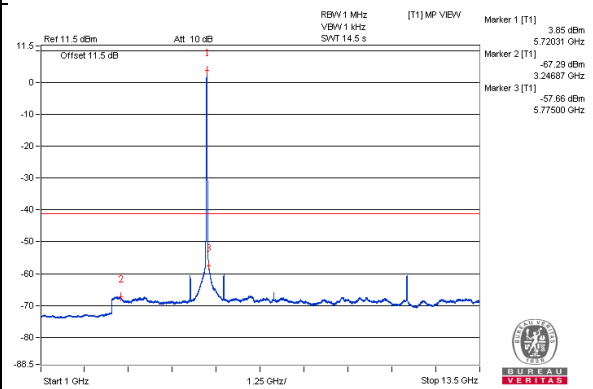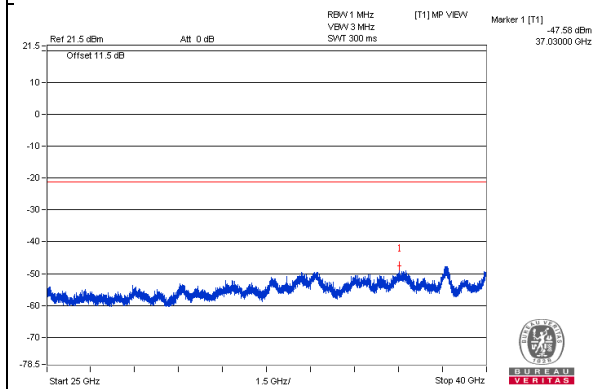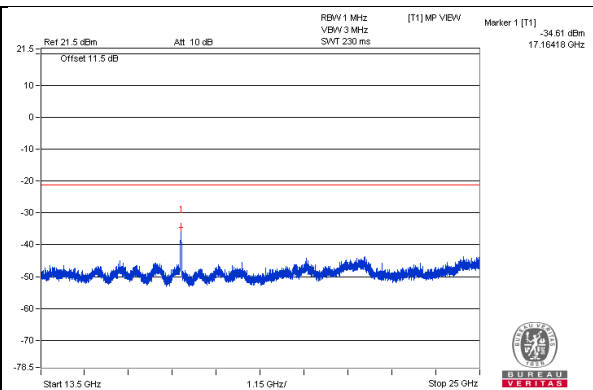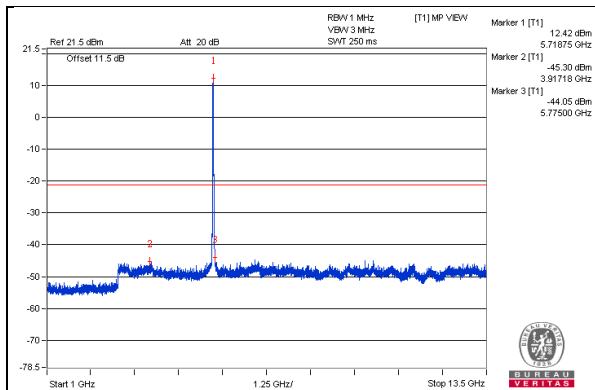


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5852.08 PK	57.79	74	-16.21	-44.27	6.8	-37.47
2	5850.92 AV	43.71	54	-10.29	-58.35	6.8	-51.55

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

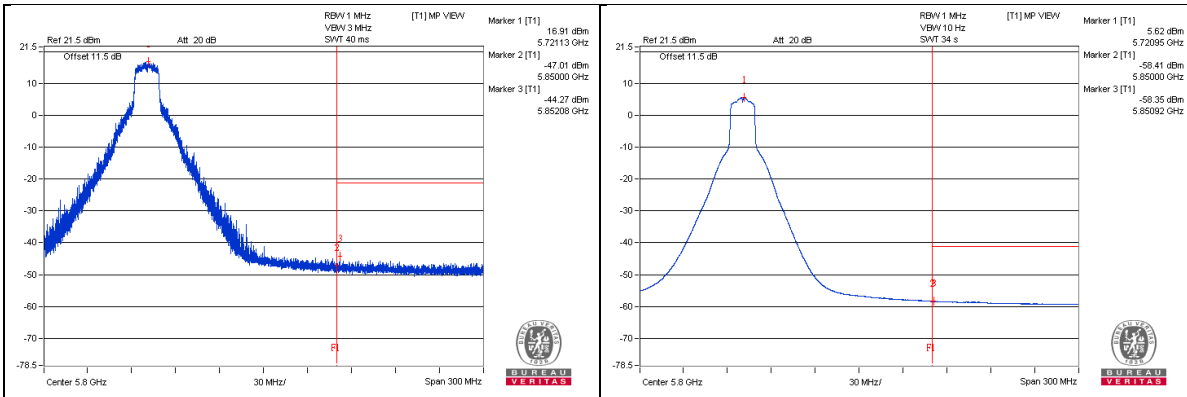

802.11a – Channel 149







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.87 PK	55.75	74	-18.25	-46.31	6.8	-39.51
2	3829.68 AV	34.97	54	-19.03	-67.09	6.8	-60.29
3	7660.93 PK	55.19	74	-18.81	-46.87	6.8	-40.07
4	7659.37 AV	36.67	54	-17.33	-65.39	6.8	-58.59
5	11492.18 PK	55.37	74	-18.63	-46.69	6.8	-39.89
6	11489.06 AV	40.96	54	-13.04	-61.1	6.8	-54.3
7	17241.81 PK	64.53	68.2	-3.67	-37.53	6.8	-30.73


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

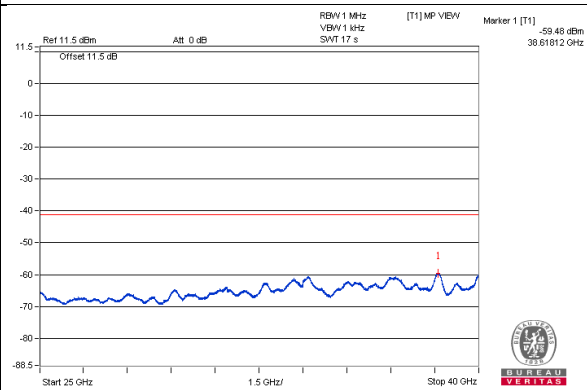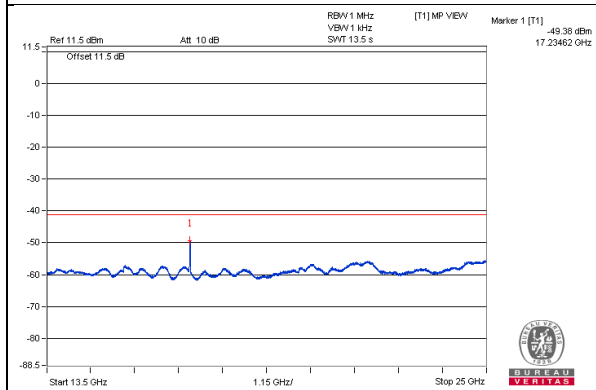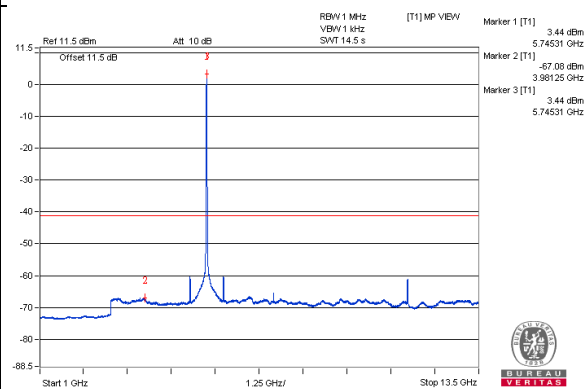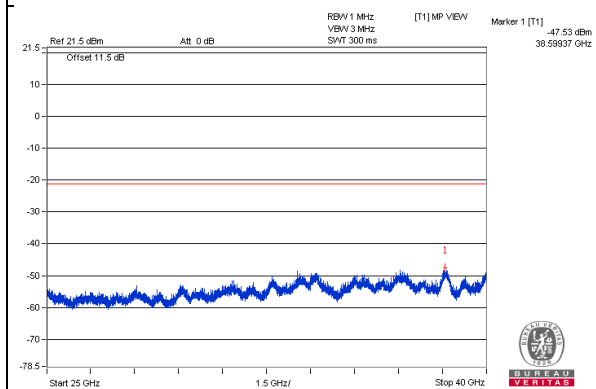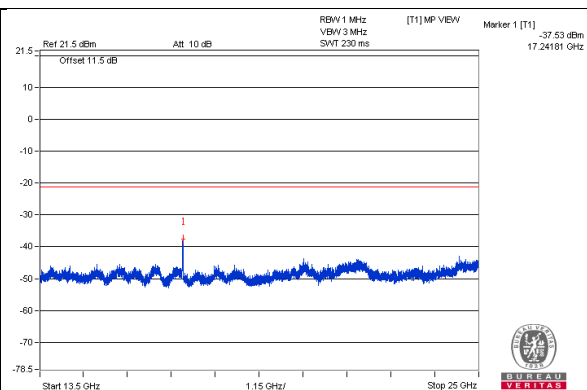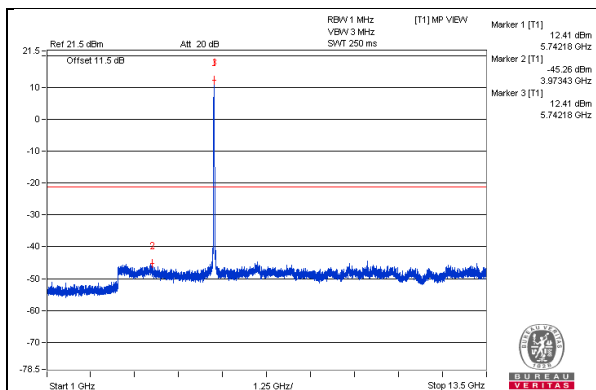

Bandedge table

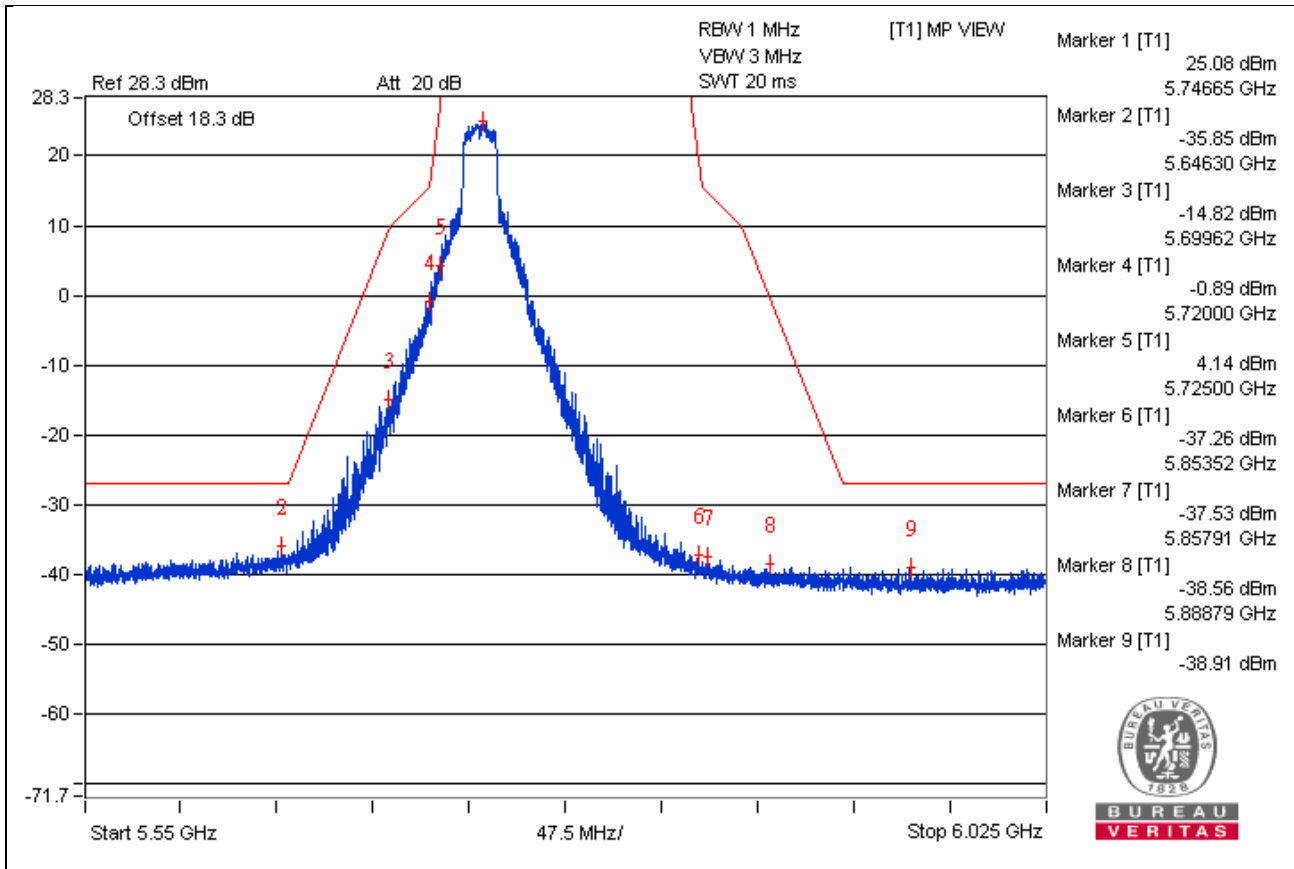

802.11a – Channel 157







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3853.12 PK	55.34	74	-18.66	-46.72	6.8	-39.92
2	3856.25 AV	34.98	54	-19.02	-67.08	6.8	-60.28
3	7714.06 PK	55.34	74	-18.66	-46.72	6.8	-39.92
4	7714.06 AV	36.84	54	-17.16	-65.22	6.8	-58.42
5	11579.68 PK	53.88	74	-20.12	-48.18	6.8	-41.38
6	11568.75 AV	33.91	54	-20.09	-68.15	6.8	-61.35
7	17351.06 PK	60.53	68.2	-7.67	-41.53	6.8	-34.73


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

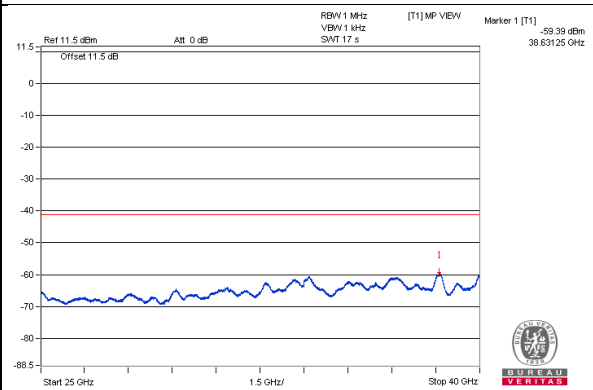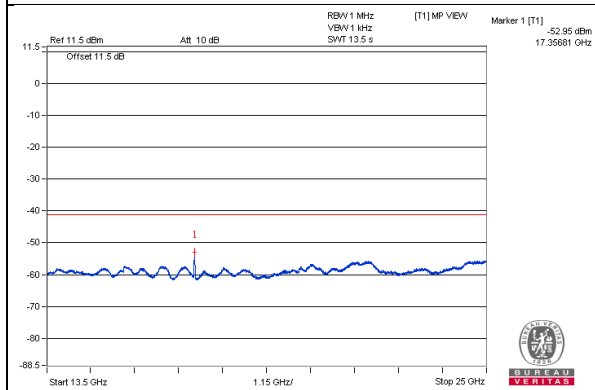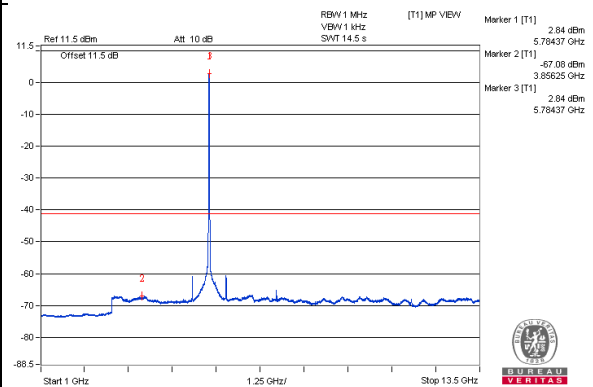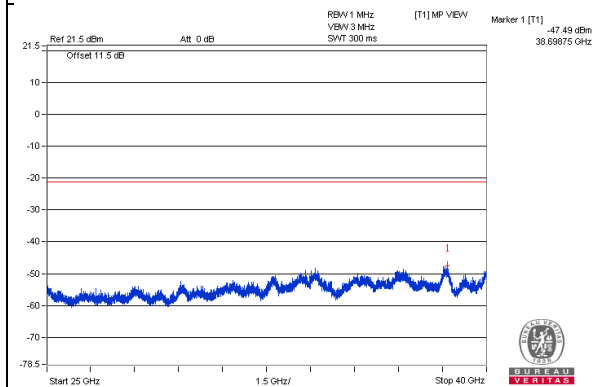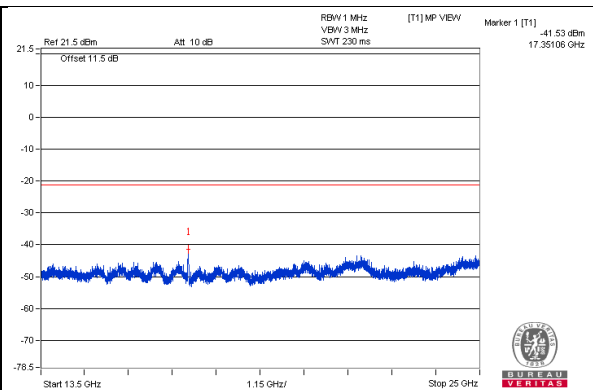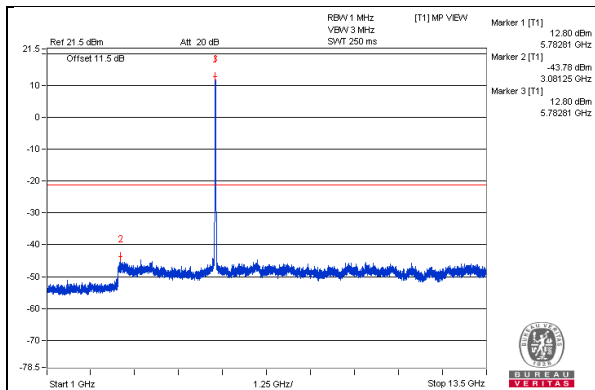

Bandedge table

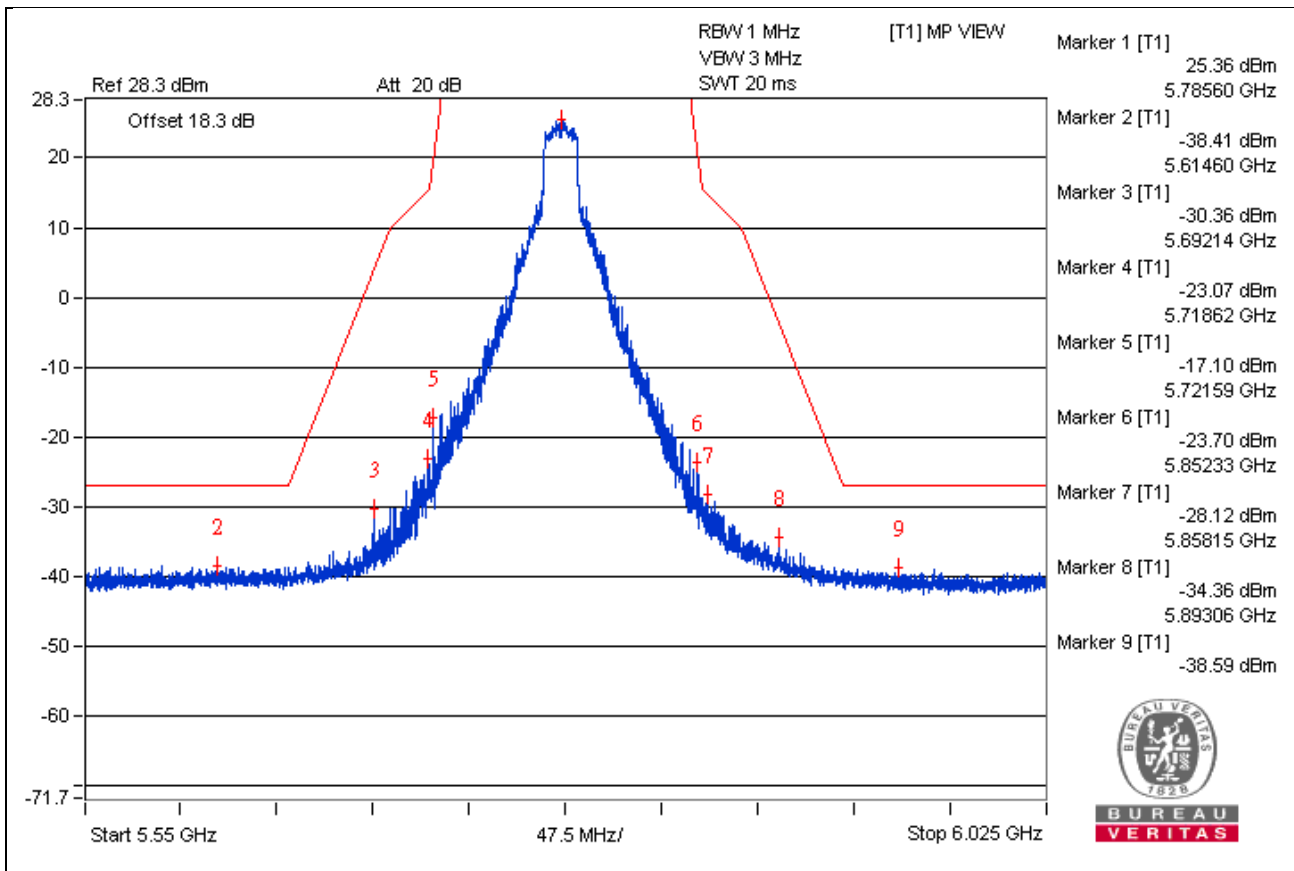

802.11a – Channel 165







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3881.25 PK	54.82	74	-19.18	-47.24	6.8	-40.44
2	3882.81 AV	35.18	54	-18.82	-66.88	6.8	-60.08
3	7764.06 PK	54.97	74	-19.03	-47.09	6.8	-40.29
4	7767.18 AV	37.14	54	-16.86	-64.92	6.8	-58.12
5	11656.25 PK	52.96	74	-21.04	-49.1	6.8	-42.3
6	11650 AV	33.76	54	-20.24	-68.3	6.8	-61.5
7	17476.12 PK	58.8	68.2	-9.4	-43.26	6.8	-36.46


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

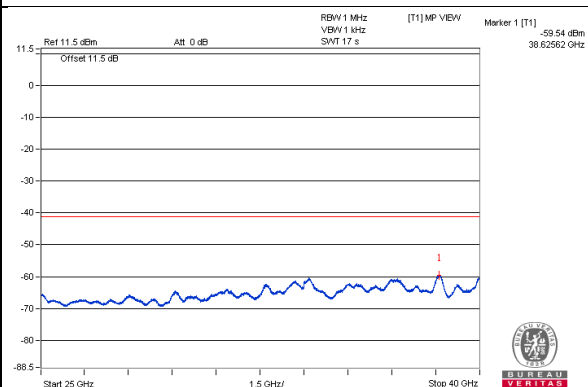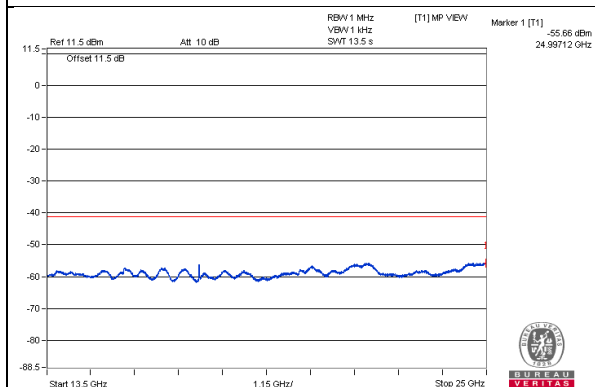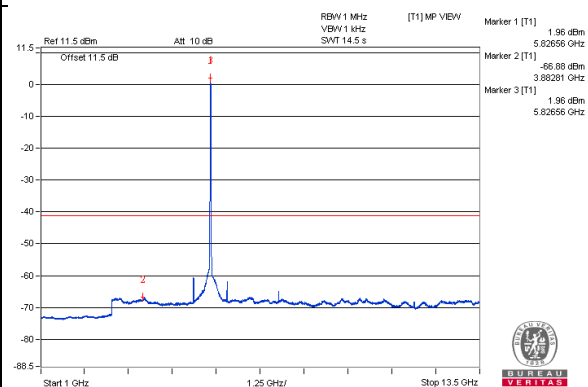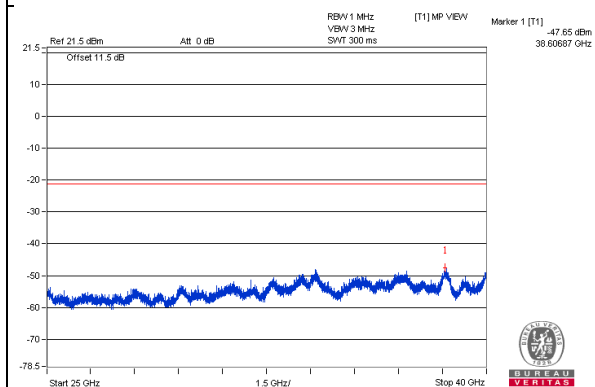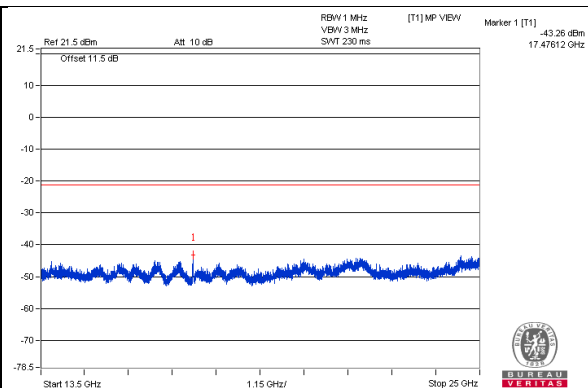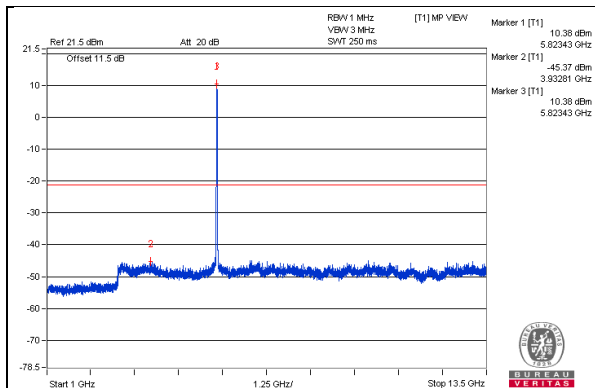

Bandedge table

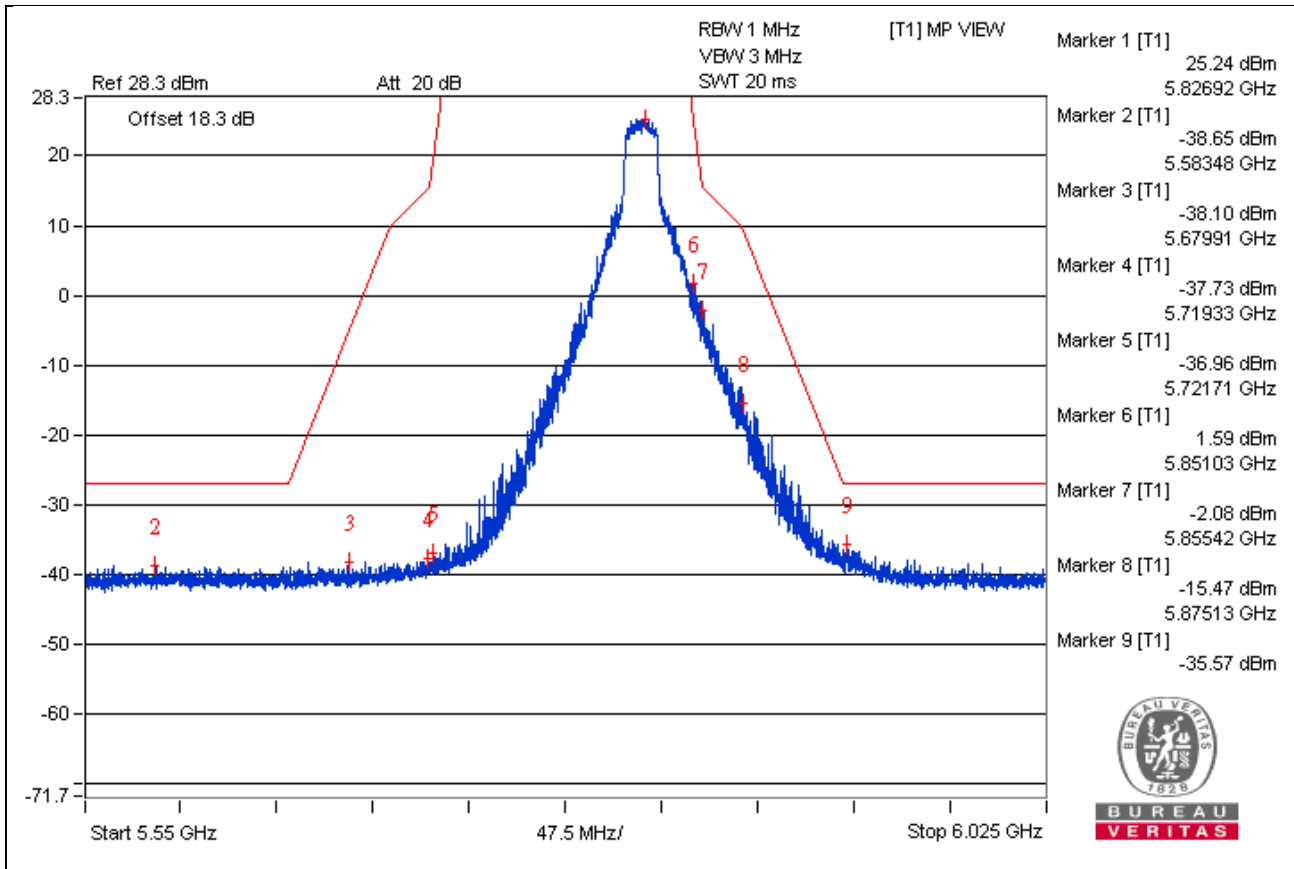







802.11ac (VHT20) - Channel 36
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3462.5 PK	54.39	74	-19.61	-47.67	6.8	-40.87
2	3453.12 AV	34.31	54	-19.69	-67.75	6.8	-60.95
3	6907.81 PK	55.6	74	-18.4	-46.46	6.8	-39.66
4	6906.25 AV	36.93	54	-17.07	-65.13	6.8	-58.33
5	10359.37 PK	55.23	74	-18.77	-46.83	6.8	-40.03
6	10357.81 AV	34.54	54	-19.46	-67.52	6.8	-60.72
7	15536.93 PK	60.28	74	-13.72	-41.78	6.8	-34.98
8	15542.68 AV	48.39	54	-5.61	-53.67	6.8	-46.87

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

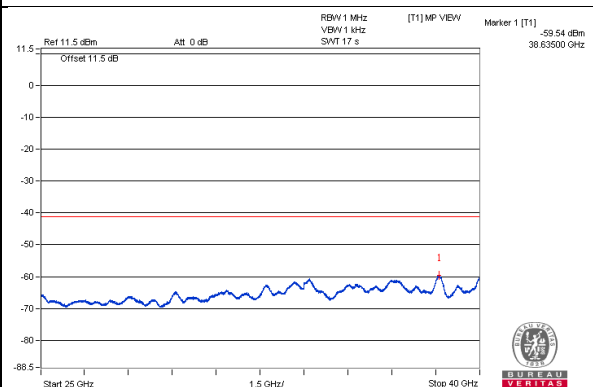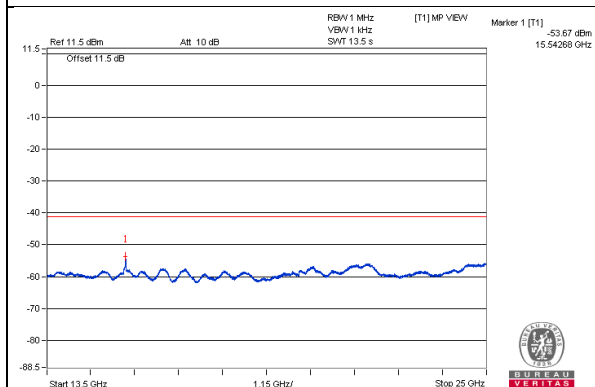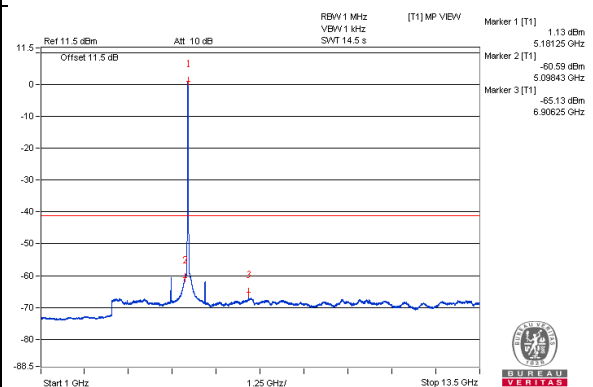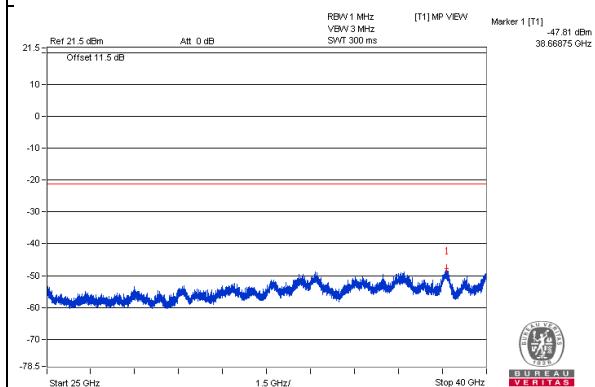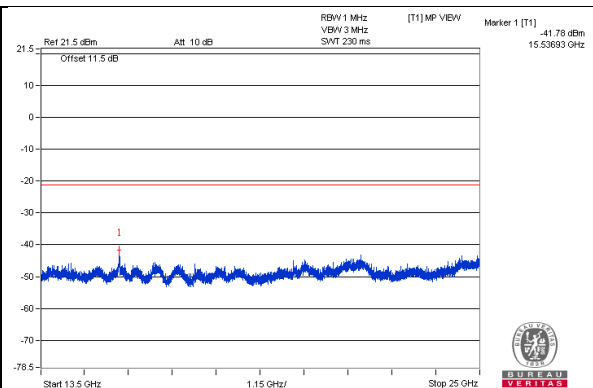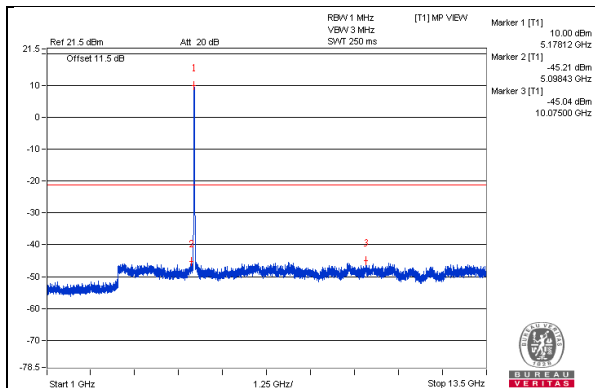


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5149.87 PK	72.23	74	-1.77	-29.83	6.8	-23.03
2	5149.82 AV	51.86	54	-2.14	-50.2	6.8	-43.4

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






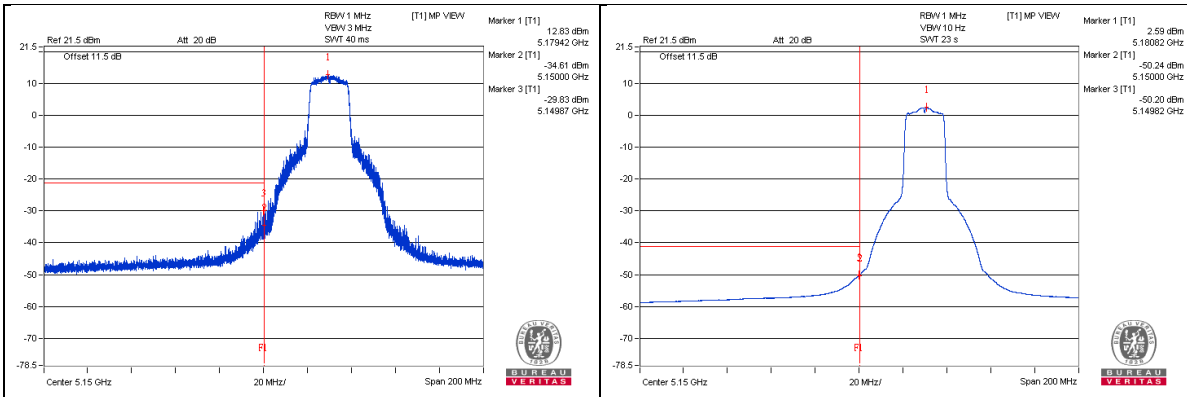


802.11ac (VHT20) - Channel 40
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3471.87 PK	54.17	74	-19.83	-47.89	6.8	-41.09
2	3465.62 AV	33.96	54	-20.04	-68.1	6.8	-61.3
3	6929.68 PK	55.17	74	-18.83	-46.89	6.8	-40.09
4	6932.81 AV	38.43	54	-15.57	-63.63	6.8	-56.83
5	10395.31 PK	55.06	74	-18.94	-47	6.8	-40.2
6	10401.56 AV	35.62	54	-18.38	-66.44	6.8	-59.64
7	15601.62 PK	62.73	74	-11.27	-39.33	6.8	-32.53
8	15600.18 AV	49.61	54	-4.39	-52.45	6.8	-45.65

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

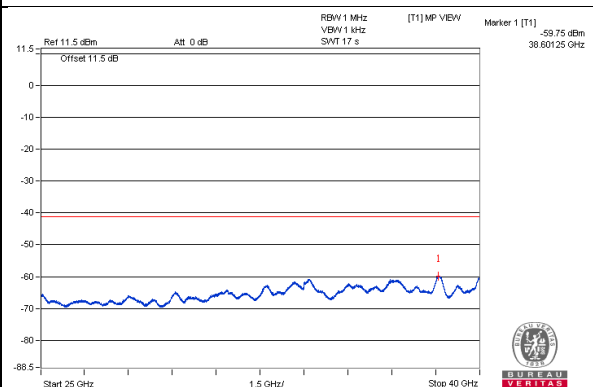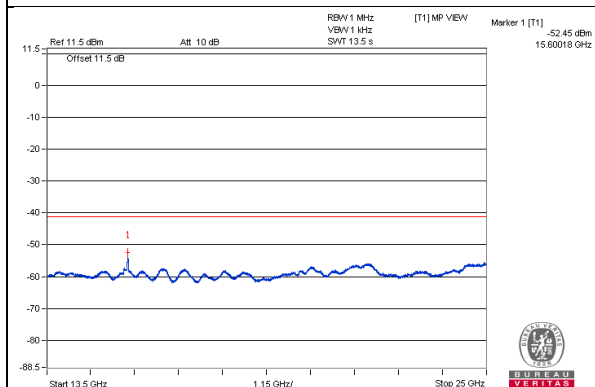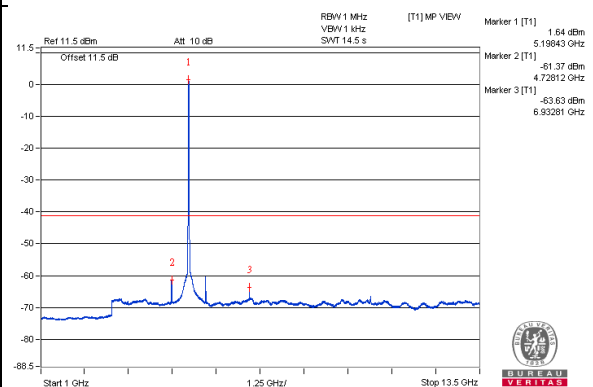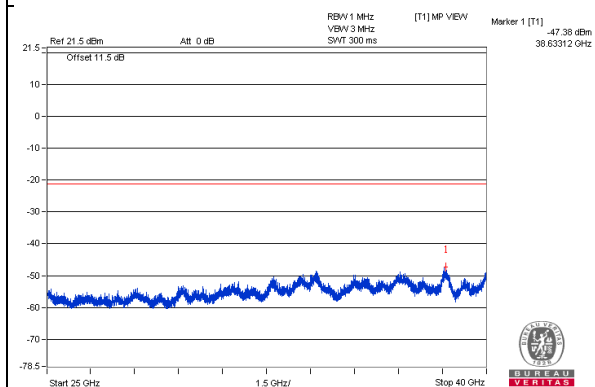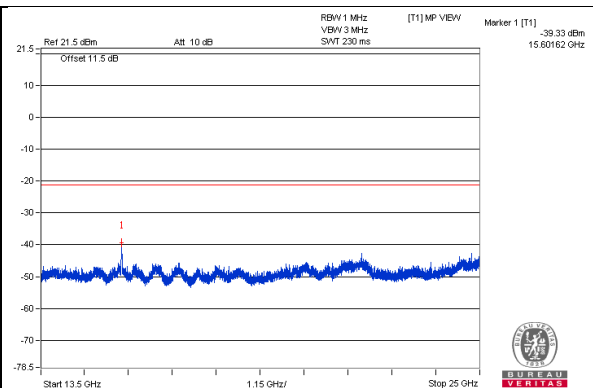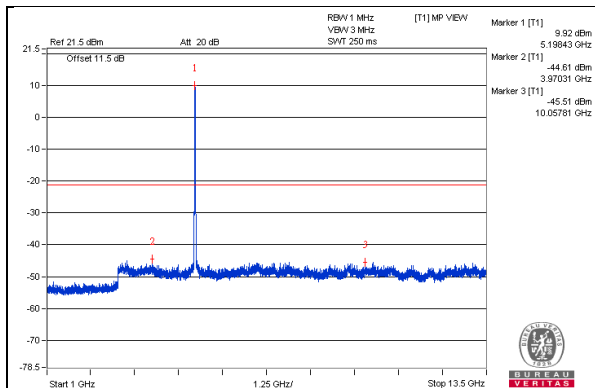


Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5149.82 PK	73.92	74	-0.08	-28.14	6.8	-21.34
2	5149.82 AV	51.28	54	-2.72	-50.78	6.8	-43.98

Note :

$$\text{Emission Level (dBUV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

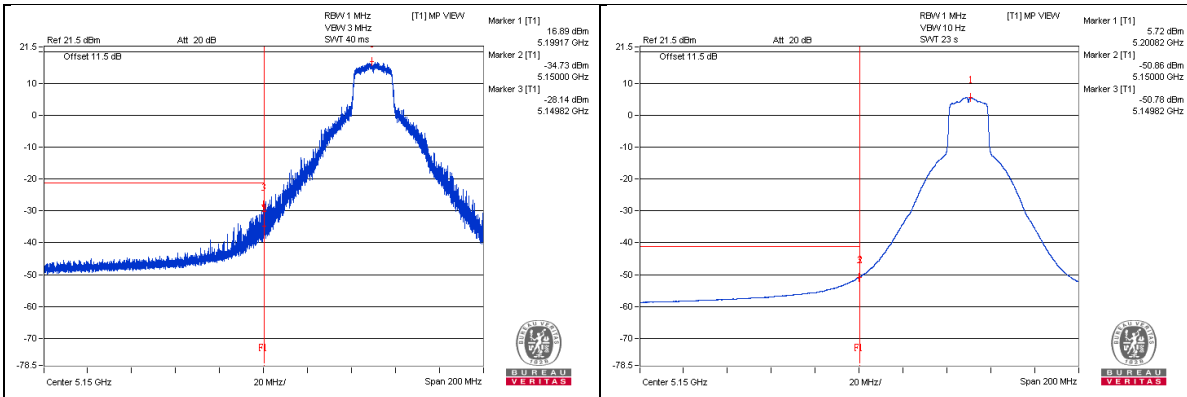







802.11ac (VHT20) - Channel 48
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3495.31 PK	54.13	74	-19.87	-47.93	6.8	-41.13
2	3492.18 AV	33.88	54	-20.12	-68.18	6.8	-61.38
3	6992.18 PK	54.79	74	-19.21	-47.27	6.8	-40.47
4	6985.93 AV	37.9	54	-16.1	-64.16	6.8	-57.36
5	10485.93 PK	55.25	74	-18.75	-46.81	6.8	-40.01
6	10479.68 AV	35.19	54	-18.81	-66.87	6.8	-60.07
7	15723.81 PK	59.61	74	-14.39	-42.45	6.8	-35.65
8	15718.06 AV	47.07	54	-6.93	-54.99	6.8	-48.19

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

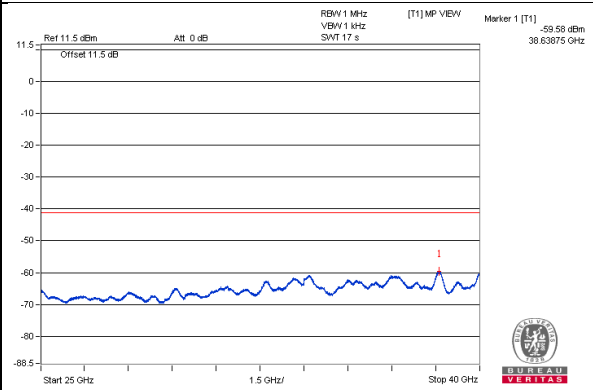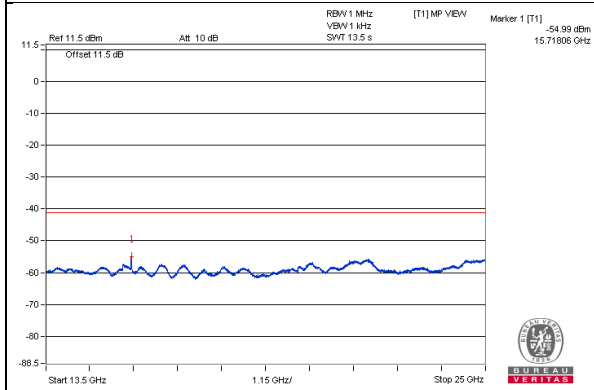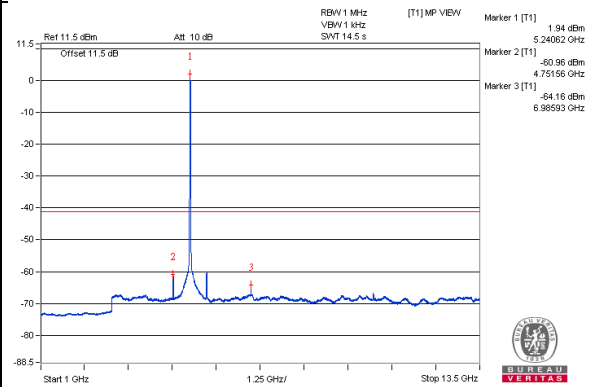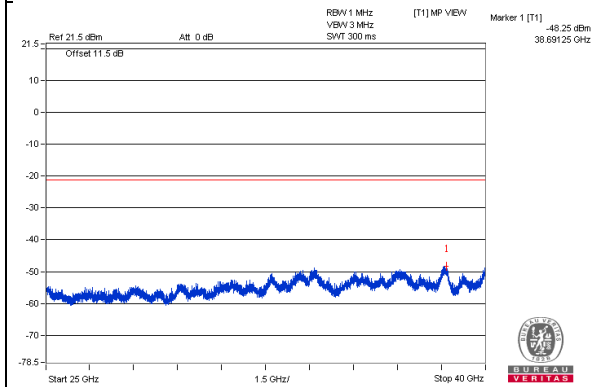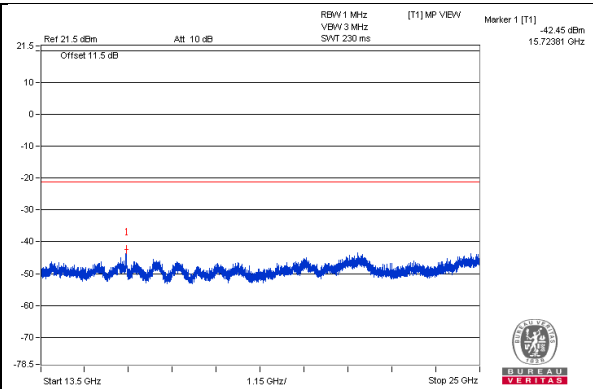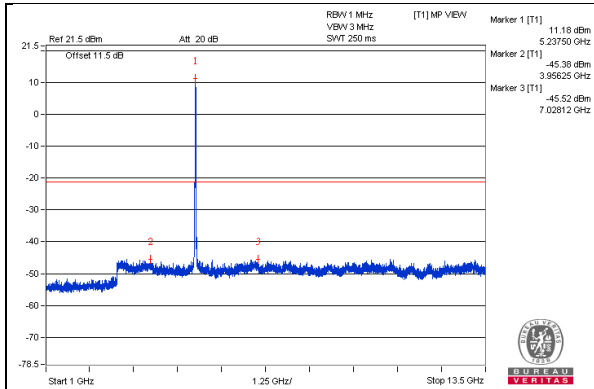


Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5146.9 PK	58.58	74	-15.42	-43.48	6.8	-36.68
2	5149.85 AV	45.09	54	-8.91	-56.97	6.8	-50.17

Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

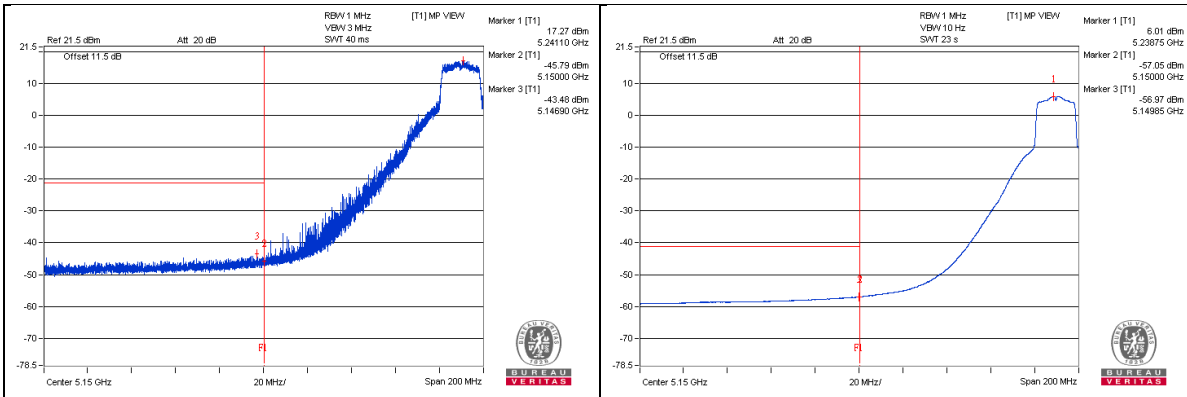







802.11ac (VHT20) - Channel 52
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3504.68 PK	53.91	74	-20.09	-48.15	6.8	-41.35
2	3506.25 AV	34.23	54	-19.77	-67.83	6.8	-61.03
3	7006.25 PK	56.04	74	-17.96	-46.02	6.8	-39.22
4	7014.06 AV	37.97	54	-16.03	-64.09	6.8	-57.29
5	10518.75 PK	54.99	74	-19.01	-47.07	6.8	-40.27
6	10520.31 AV	34.3	54	-19.7	-67.76	6.8	-60.96
7	15787.06 PK	58.46	74	-15.54	-43.6	6.8	-36.8
8	15781.31 AV	47.16	54	-6.84	-54.9	6.8	-48.1

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

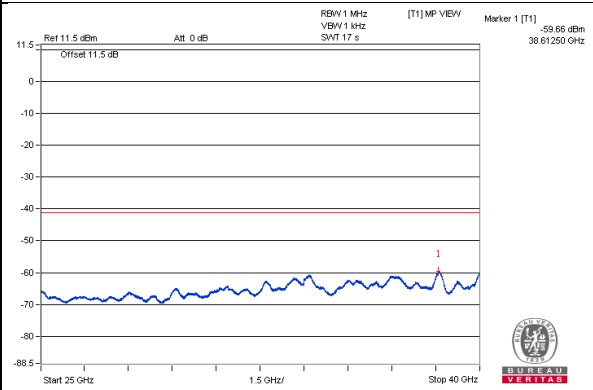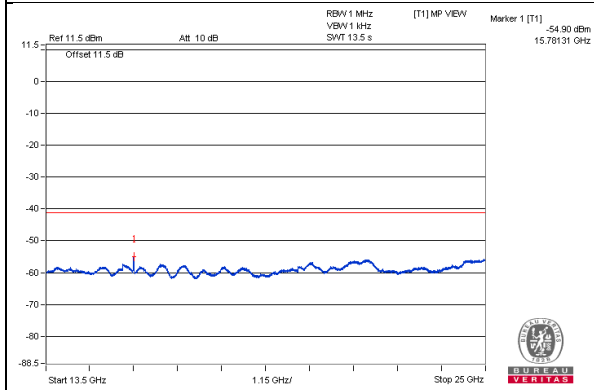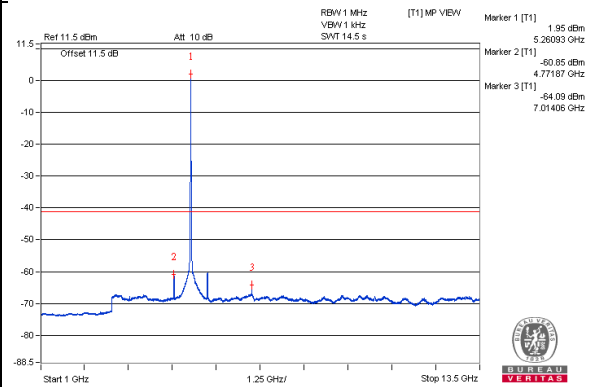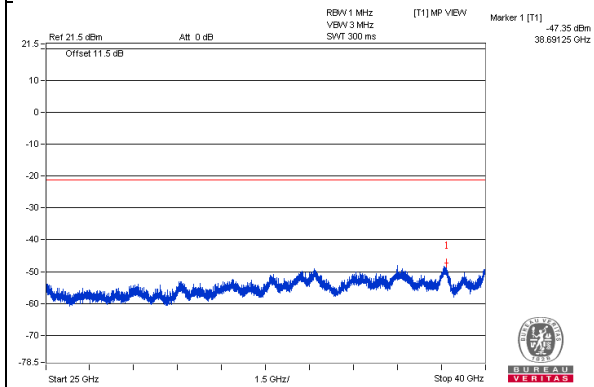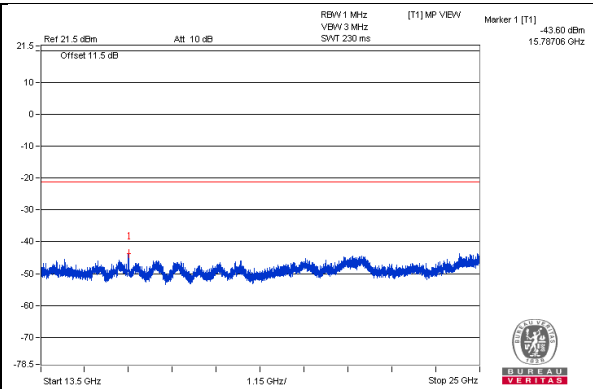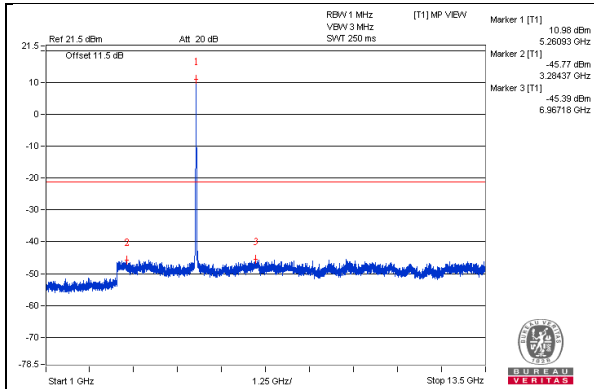


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5107.6 PK	56.7	74	-17.3	-45.36	6.8	-38.56
2	5149.85 AV	44.13	54	-9.87	-57.93	6.8	-51.13

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






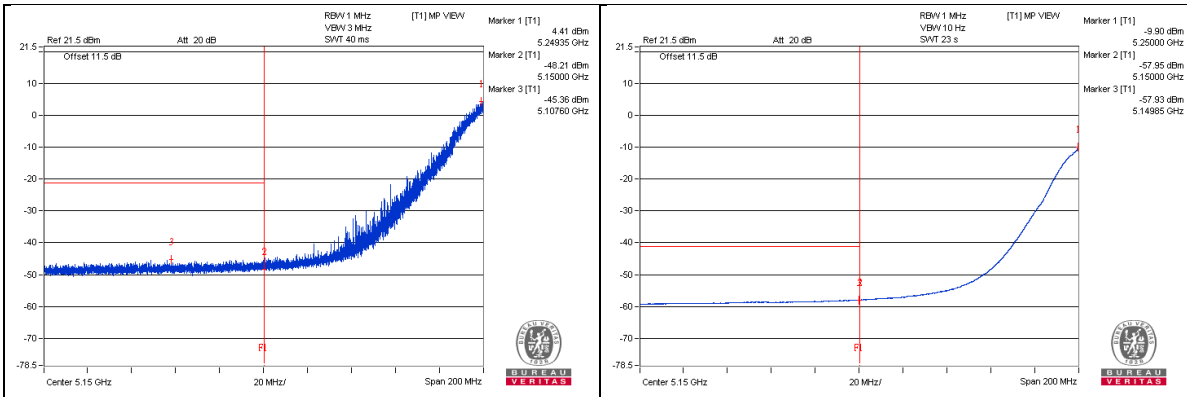


802.11ac (VHT20) - Channel 60
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3529.68 PK	54.34	74	-19.66	-47.72	6.8	-40.92
2	3532.81 AV	33.84	54	-20.16	-68.22	6.8	-61.42
3	7067.18 PK	54.35	74	-19.65	-47.71	6.8	-40.91
4	7067.18 AV	35.71	54	-18.29	-66.35	6.8	-59.55
5	10606.25 PK	54.59	74	-19.41	-47.47	6.8	-40.67
6	15899.18 PK	61.18	74	-12.82	-40.88	6.8	-34.08
7	15900.62 AV	50	54	-4	-52.06	6.8	-45.26

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

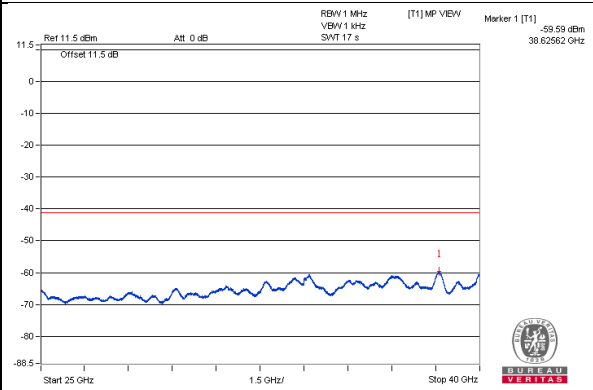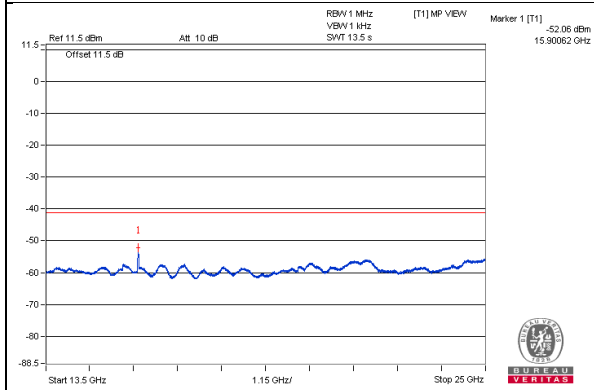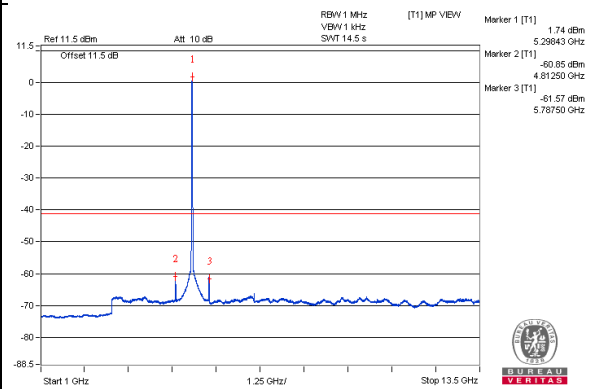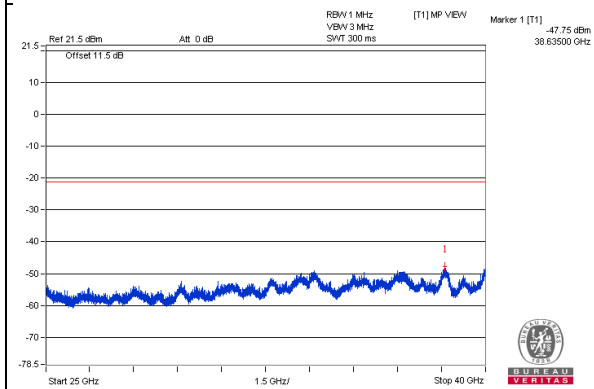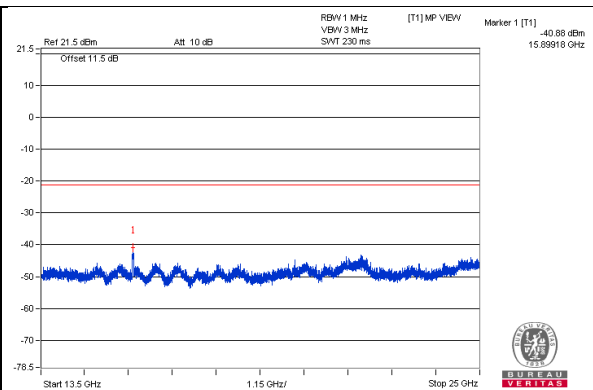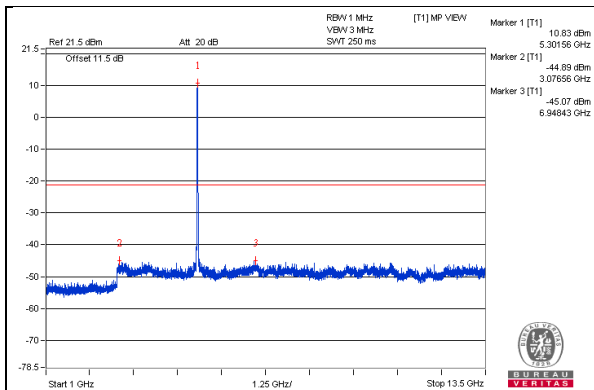


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5350.9 PK	72.45	74	-1.55	-29.61	6.8	-22.81
2	5350 AV	50.92	54	-3.08	-51.14	6.8	-44.34

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

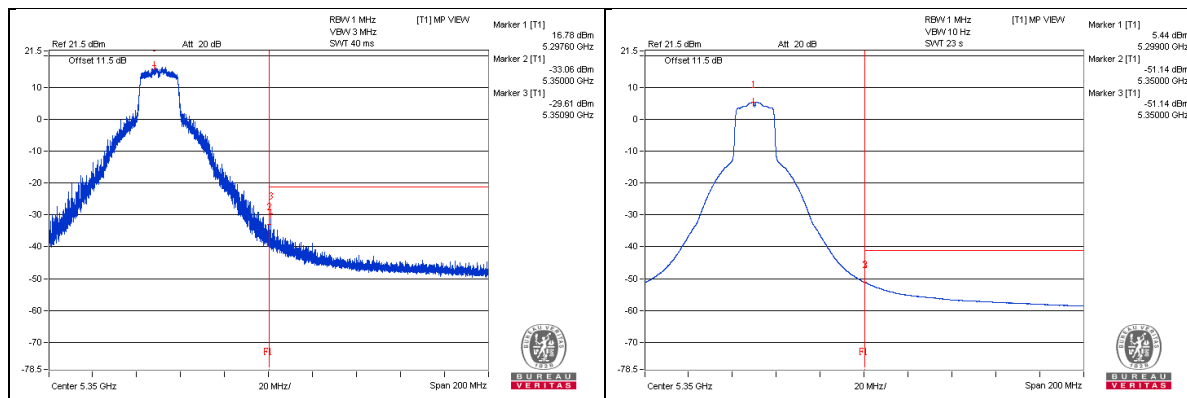







802.11ac (VHT20) - Channel 64
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3537.5 PK	54.67	74	-19.33	-47.39	6.8	-40.59
2	3546.87 AV	34.06	54	-19.94	-68	6.8	-61.2
3	7095.31 PK	53.91	74	-20.09	-48.15	6.8	-41.35
4	7093.75 AV	34.65	54	-19.35	-67.41	6.8	-60.61
5	10631.25 PK	54.69	74	-19.31	-47.37	6.8	-40.57
6	10639.06 AV	34.6	54	-19.4	-67.46	6.8	-60.66
7	15963.87 PK	61.3	74	-12.7	-40.76	6.8	-33.96
8	15961 AV	48.58	54	-5.42	-53.48	6.8	-46.68

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

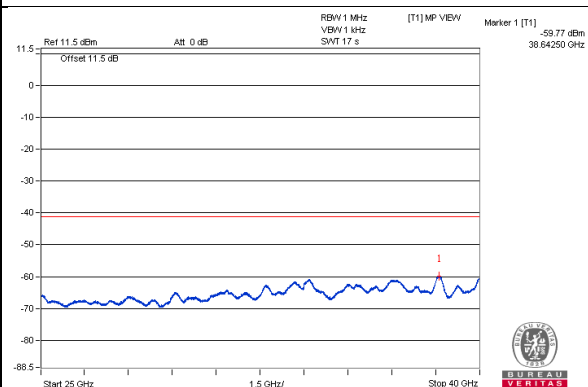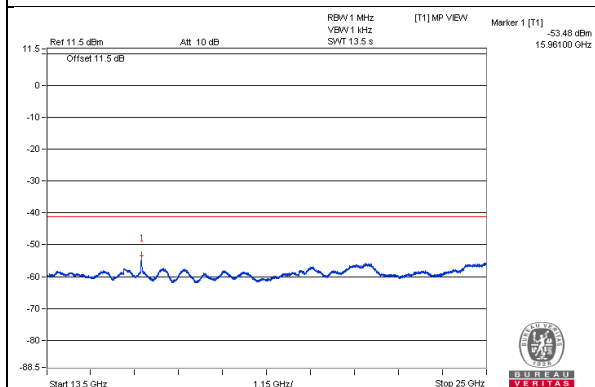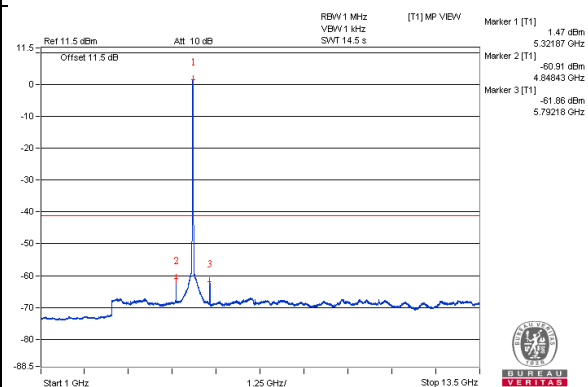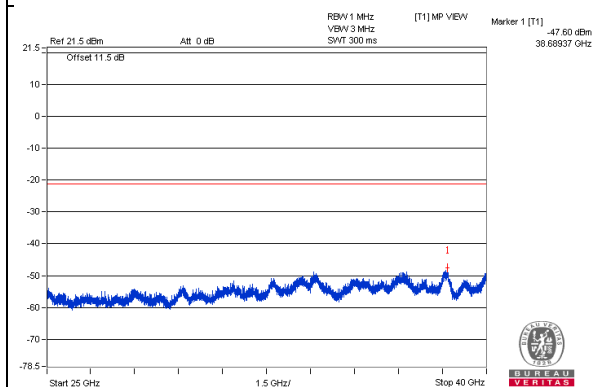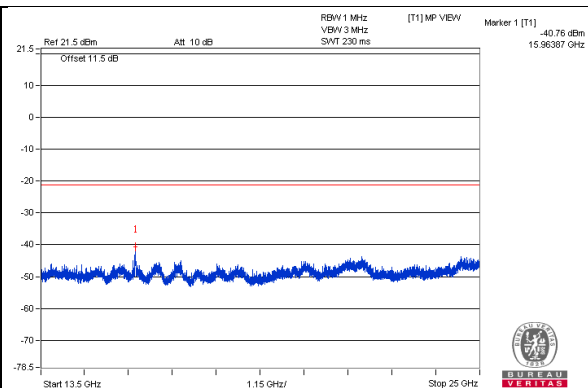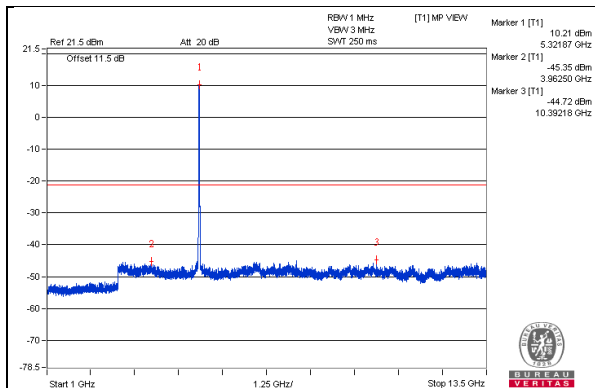


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5350.32 PK	72.34	74	-1.66	-29.72	6.8	-22.92
2	5350 AV	53.2	54	-0.8	-48.86	6.8	-42.06

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






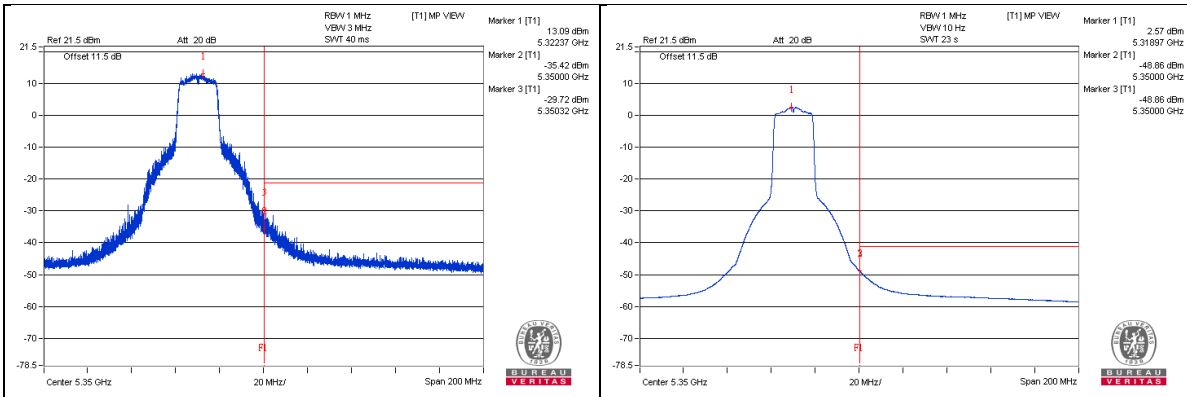


802.11ac (VHT20) – Channel 100
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3662.5 PK	54.95	74	-19.05	-47.11	6.8	-40.31
2	3665.62 AV	34.7	54	-19.3	-67.36	6.8	-60.56
3	7326.56 PK	55.04	74	-18.96	-47.02	6.8	-40.22
4	7332.81 AV	36.12	54	-17.88	-65.94	6.8	-59.14
5	11003.12 PK	54.5	74	-19.5	-47.56	6.8	-40.76
6	10998.43 AV	39.15	54	-14.85	-62.91	6.8	-56.11
7	16492.87 PK	59	68.2	-9.2	-43.06	6.8	-36.26

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

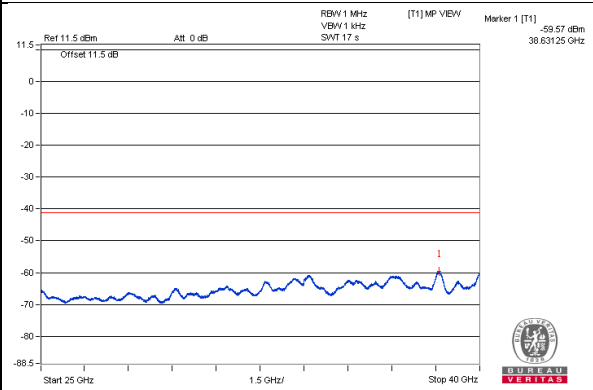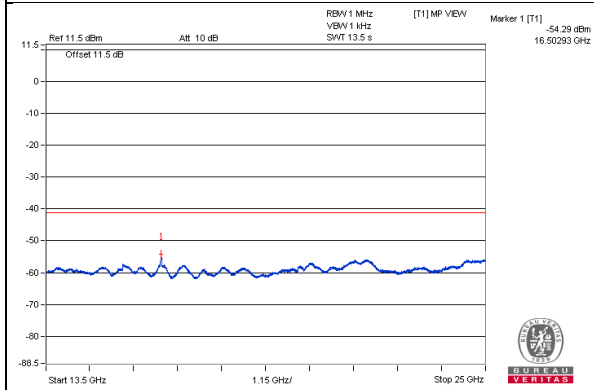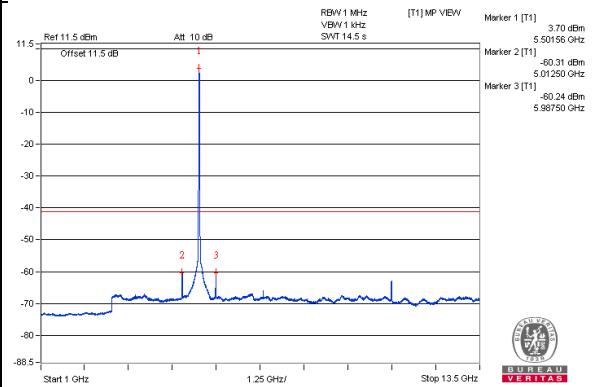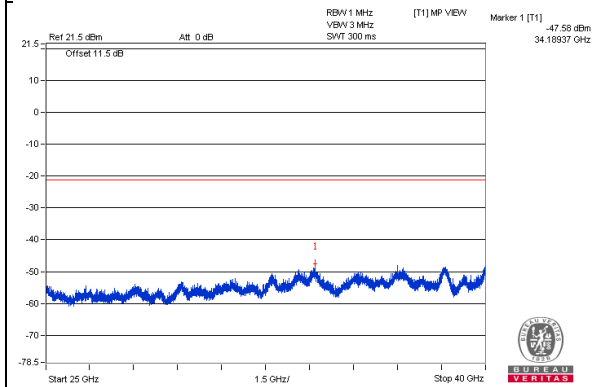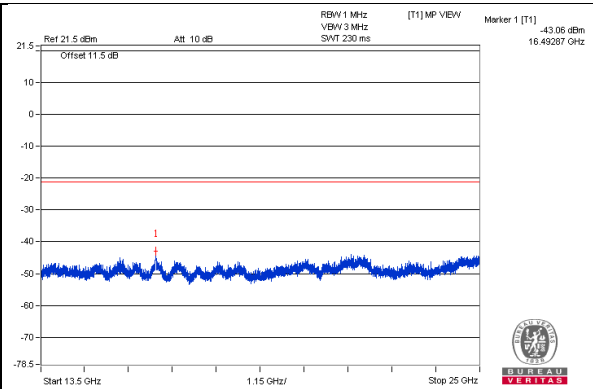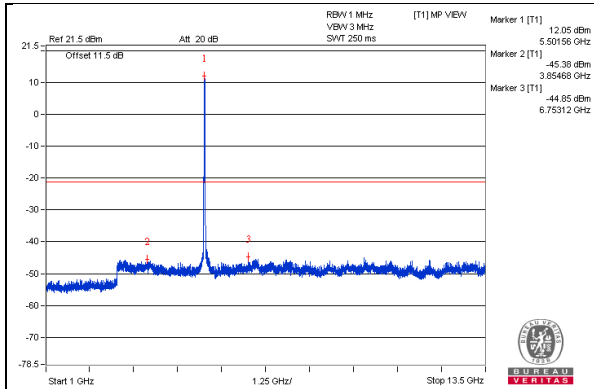


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5467.78 PK	70.57	74	-3.43	-31.49	6.8	-24.69
2	5470 AV	51.78	54	-2.22	-50.28	6.8	-43.48

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






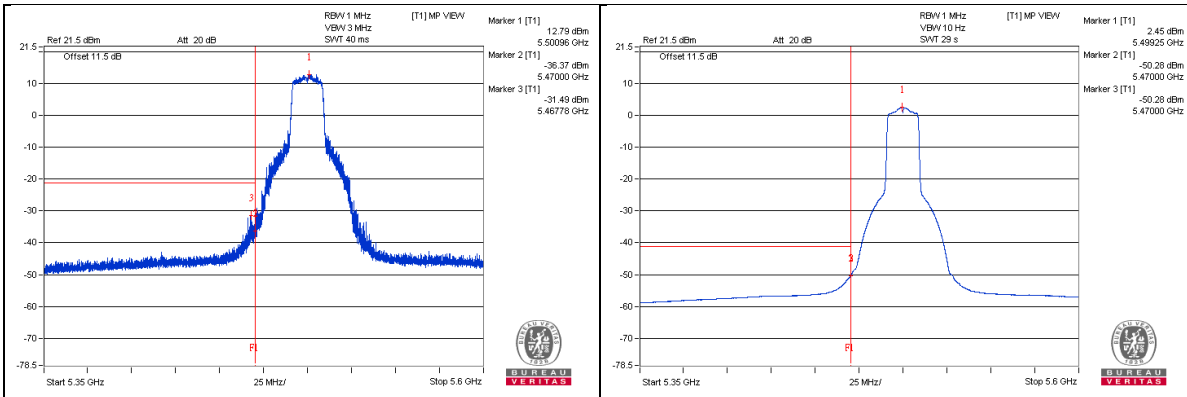


802.11ac (VHT20) – Channel 116
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3710.93 PK	54.21	74	-19.79	-47.85	6.8	-41.05
2	3720.31 AV	34.73	54	-19.27	-67.33	6.8	-60.53
3	7445.31 PK	55.26	74	-18.74	-46.8	6.8	-40
4	7440.62 AV	38.25	54	-15.75	-63.81	6.8	-57.01
5	11165.62 PK	53.9	74	-20.1	-48.16	6.8	-41.36
6	11164.06 AV	34.4	54	-19.6	-67.66	6.8	-60.86
7	16735.81 PK	62.56	68.2	-5.64	-39.5	6.8	-32.7

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

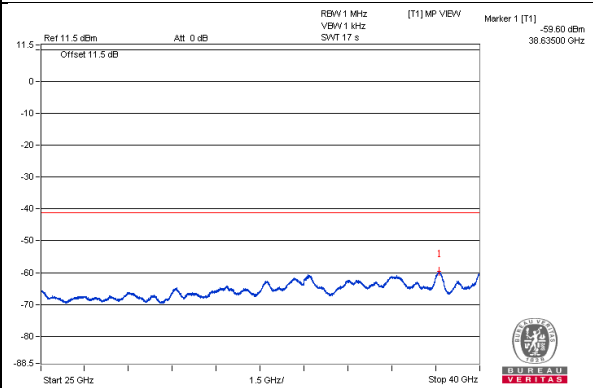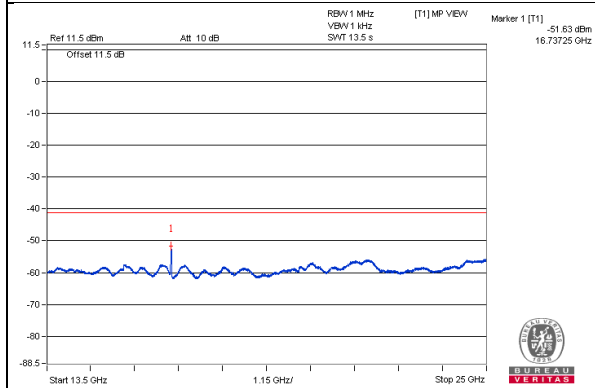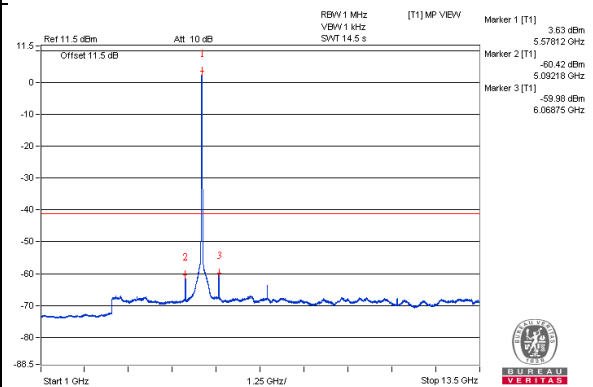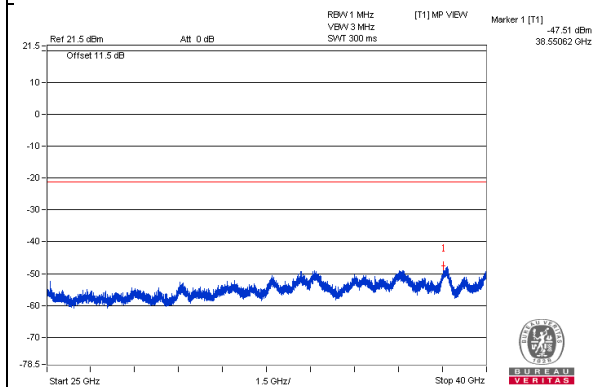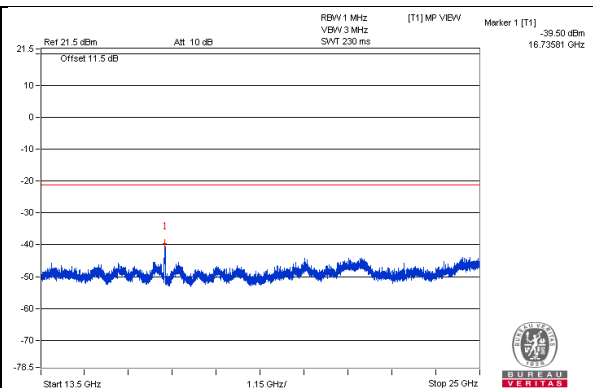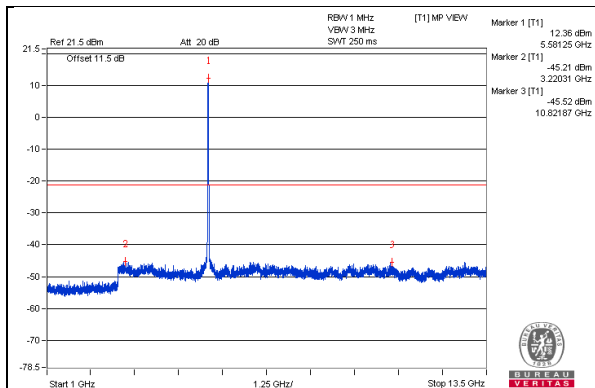


Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5426.4 PK	57.69	74	-16.31	-44.37	6.8	-37.57
2	5469.37 AV	44.27	54	-9.73	-57.79	6.8	-50.99

Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.






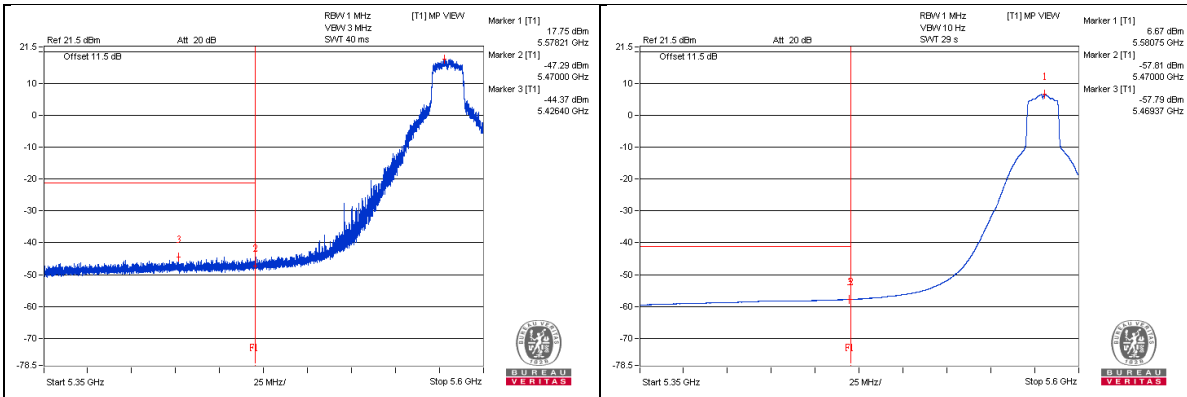


802.11ac (VHT20) – Channel 140
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.56 PK	55.32	74	-18.68	-46.74	6.8	-39.94
2	3800 AV	34.91	54	-19.09	-67.15	6.8	-60.35
3	7609.37 PK	55.19	74	-18.81	-46.87	6.8	-40.07
4	7600 AV	36.55	54	-17.45	-65.51	6.8	-58.71
5	11403.12 PK	56.8	74	-17.2	-45.26	6.8	-38.46
6	11401.56 AV	39.3	54	-14.7	-62.76	6.8	-55.96
7	17105.25 PK	60.87	68.2	-7.33	-41.19	6.8	-34.39

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

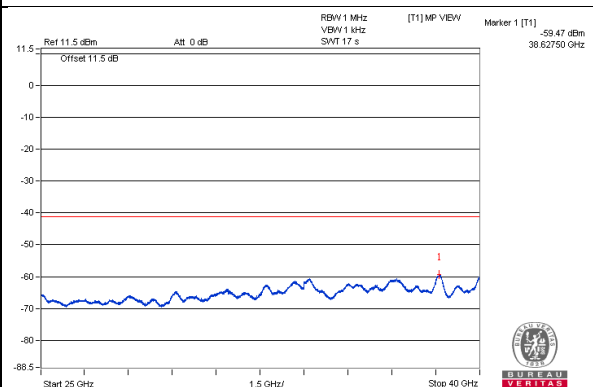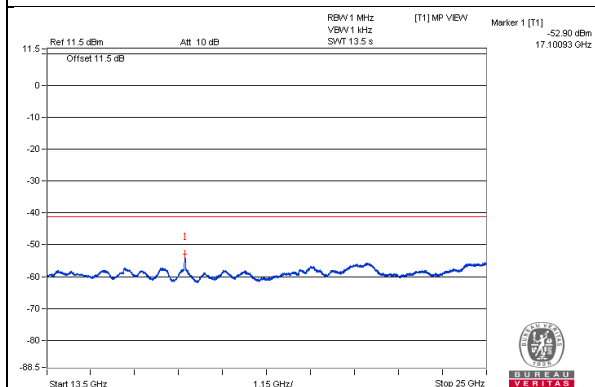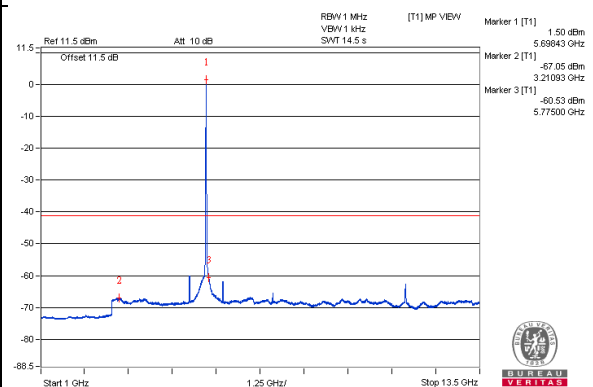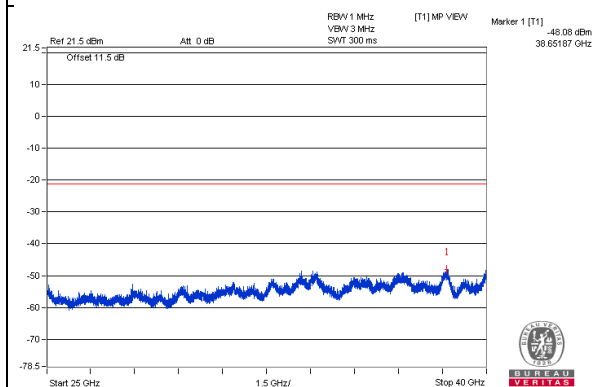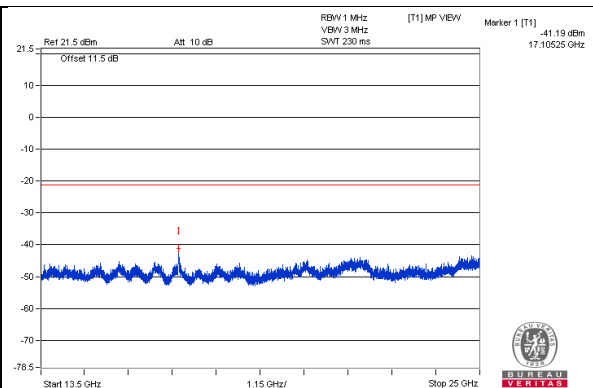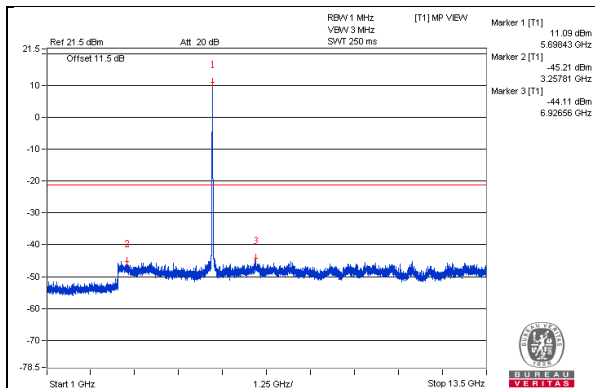


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5725 PK	69.16	74	-4.84	-32.9	6.8	-26.1
2	5725 AV	52.98	54	-1.02	-49.08	6.8	-42.28

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






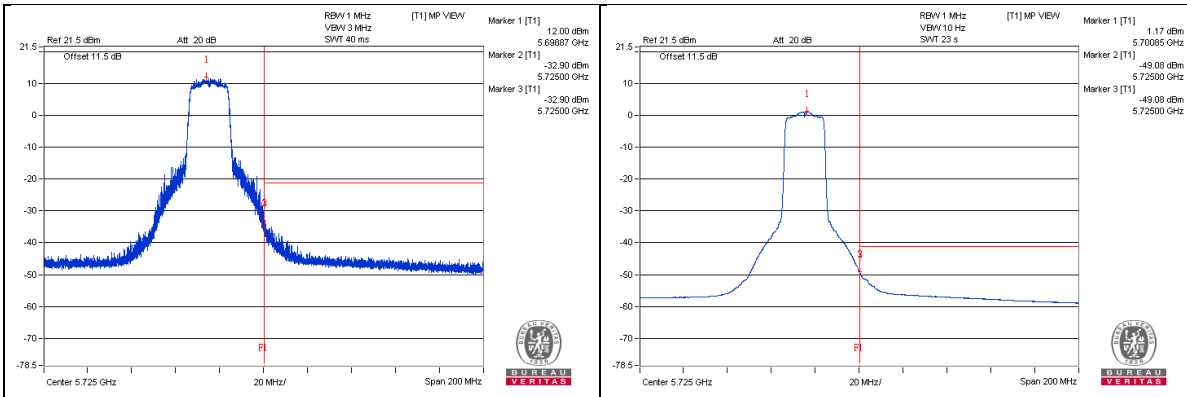


802.11ac (VHT20) – Channel 144
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.93 PK	55.52	74	-18.48	-46.54	6.8	-39.74
2	3812.5 AV	34.6	54	-19.4	-67.46	6.8	-60.66
3	7629.68 PK	55.22	74	-18.78	-46.84	6.8	-40.04
4	7626.56 AV	35.57	54	-18.43	-66.49	6.8	-59.69
5	11443.75 PK	55.78	74	-18.22	-46.28	6.8	-39.48
6	11437.5 AV	40.95	54	-13.05	-61.11	6.8	-54.31
7	17162.75 PK	66.18	68.2	-2.02	-35.88	6.8	-29.08

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

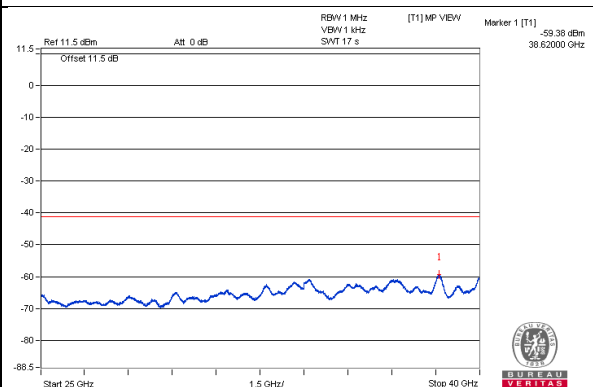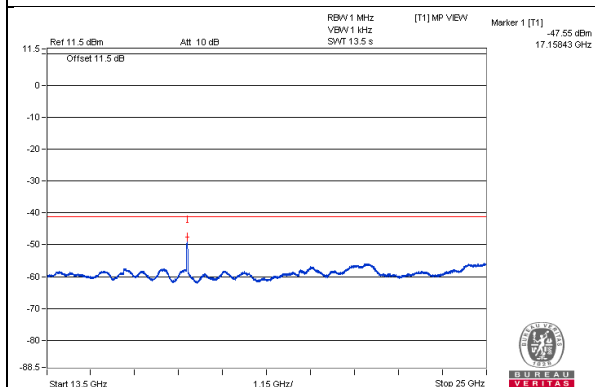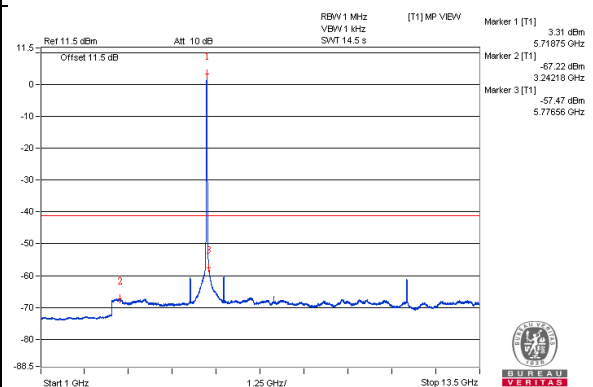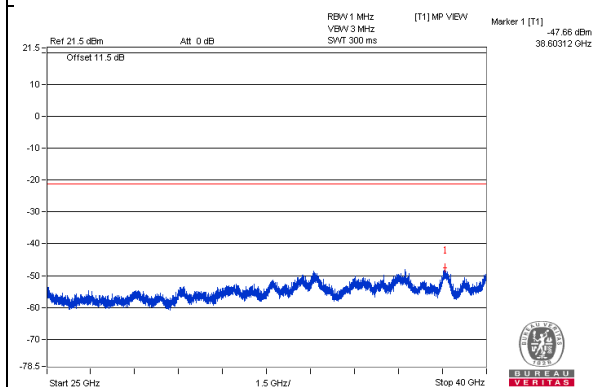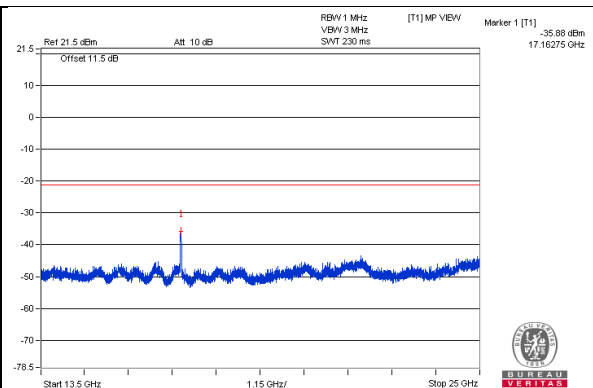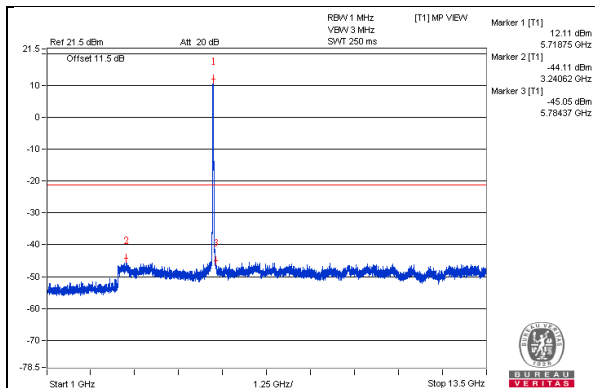


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5853.77 PK	56.84	74	-17.16	-45.22	6.8	-38.42
2	5850.43 AV	43.75	54	-10.25	-58.31	6.8	-51.51

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.






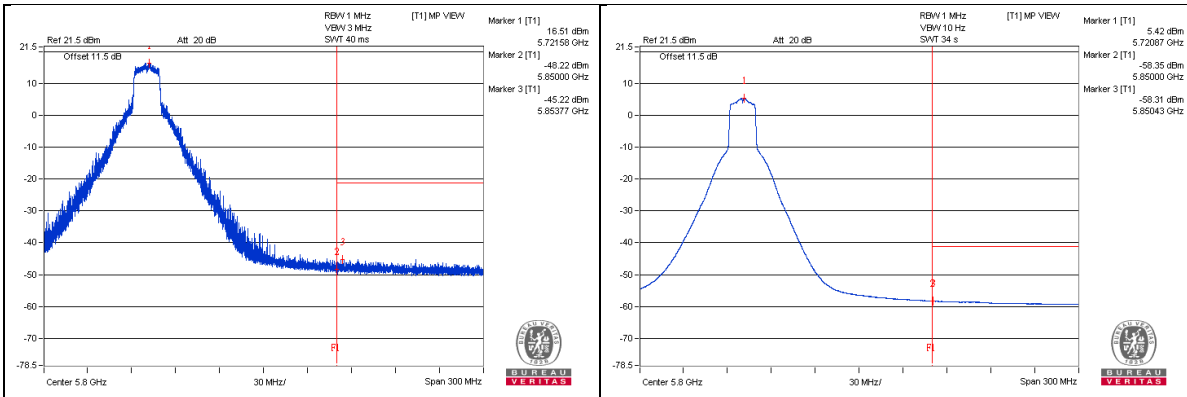


802.11ac (VHT20) – Channel 149
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.87 PK	56.35	74	-17.65	-45.71	6.8	-38.91
2	3829.68 AV	34.68	54	-19.32	-67.38	6.8	-60.58
3	7657.81 PK	55.31	74	-18.69	-46.75	6.8	-39.95
4	7660.93 AV	36.53	54	-17.47	-65.53	6.8	-58.73
5	11487.5 PK	55.35	74	-18.65	-46.71	6.8	-39.91
6	11490.62 AV	40.92	54	-13.08	-61.14	6.8	-54.34
7	17231.75 PK	64.63	68.2	-3.57	-37.43	6.8	-30.63

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

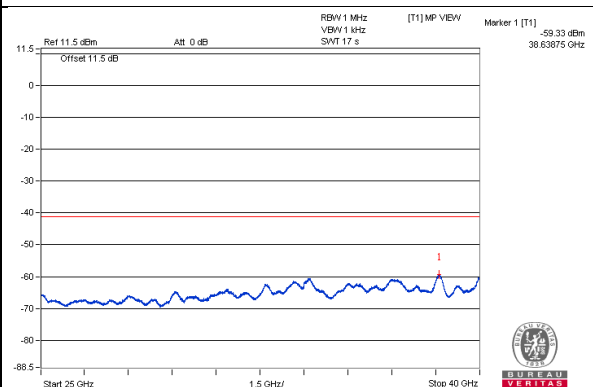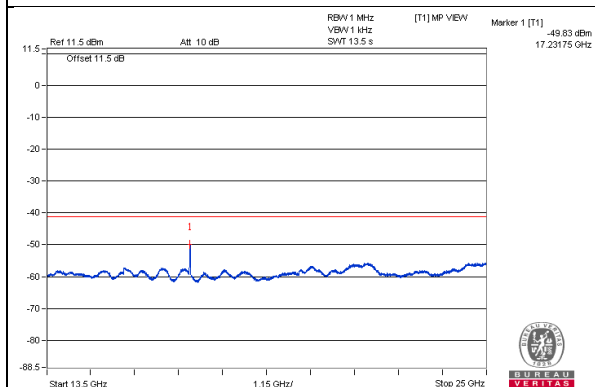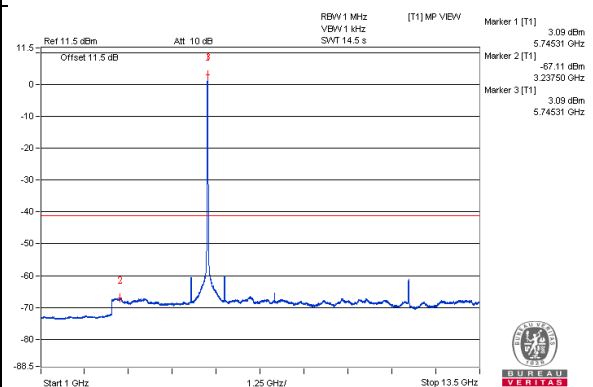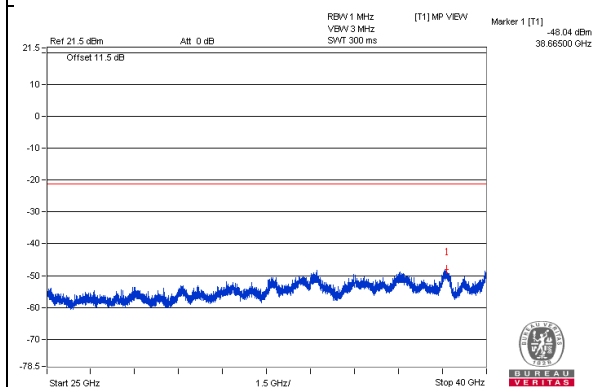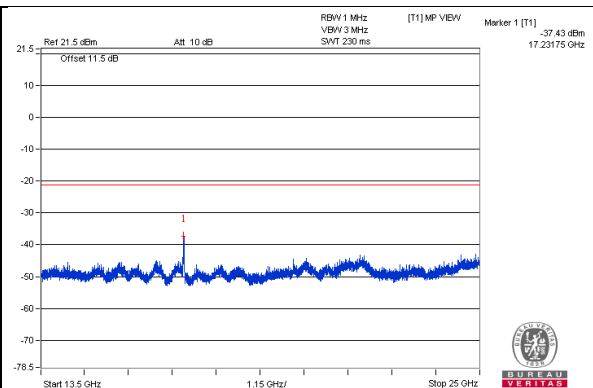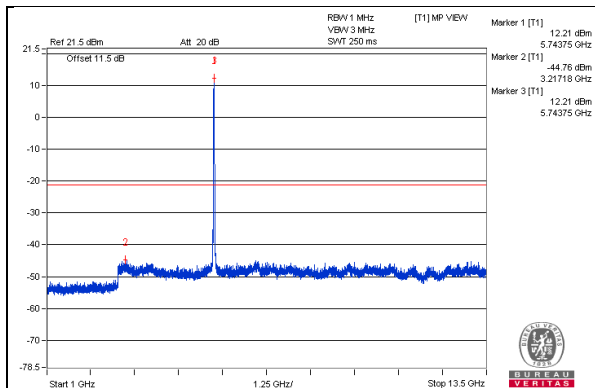

Bandedge table






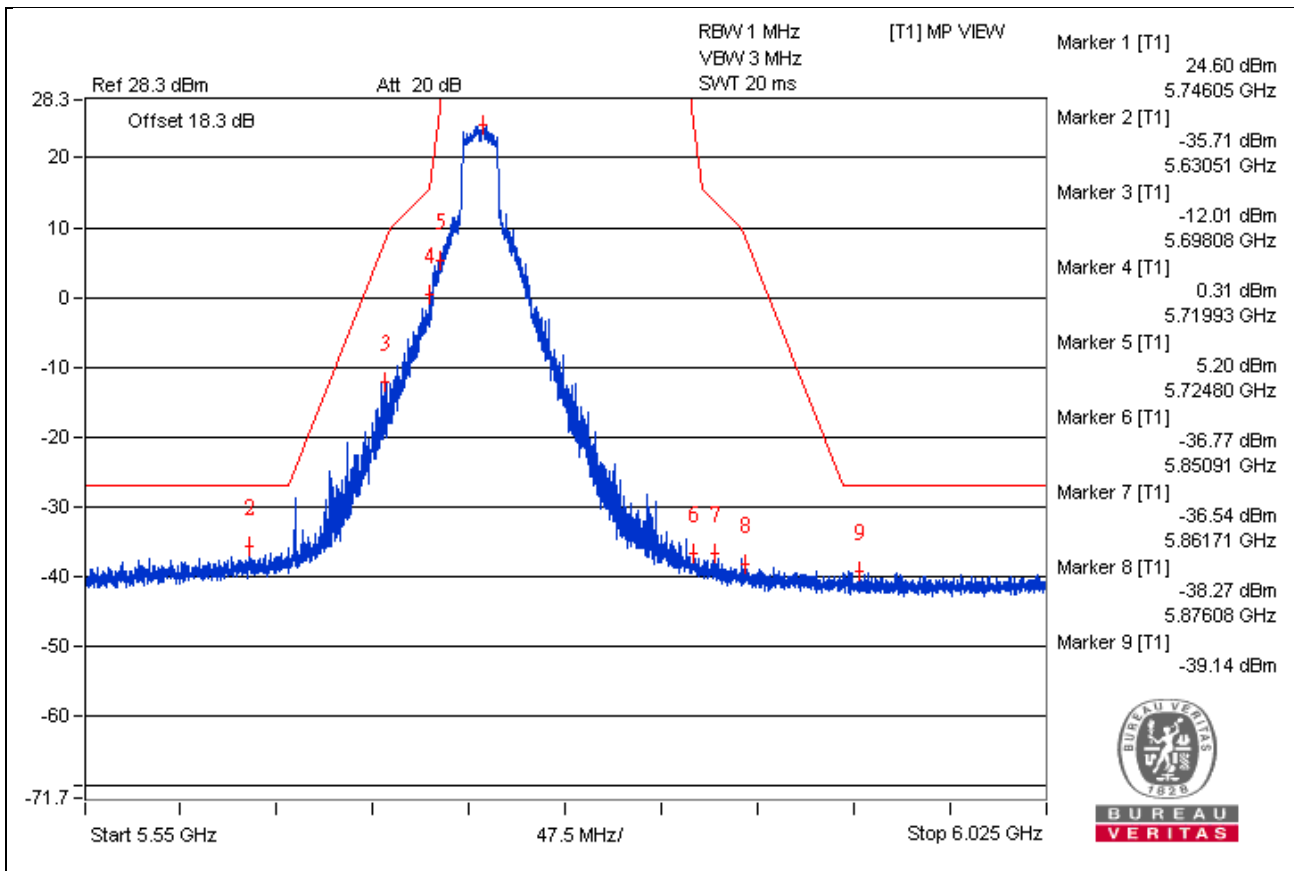


802.11ac (VHT20) – Channel 157
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3860.93 PK	55.61	74	-18.39	-46.45	6.8	-39.65
2	3856.25 AV	35	54	-19	-67.06	6.8	-60.26
3	7709.37 PK	54.93	74	-19.07	-47.13	6.8	-40.33
4	7714.06 AV	36.32	54	-17.68	-65.74	6.8	-58.94
5	11570.31 PK	54.04	74	-19.96	-48.02	6.8	-41.22
6	11565.62 AV	33.9	54	-20.1	-68.16	6.8	-61.36
7	17351.06 PK	60.2	68.2	-8	-41.86	6.8	-35.06

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

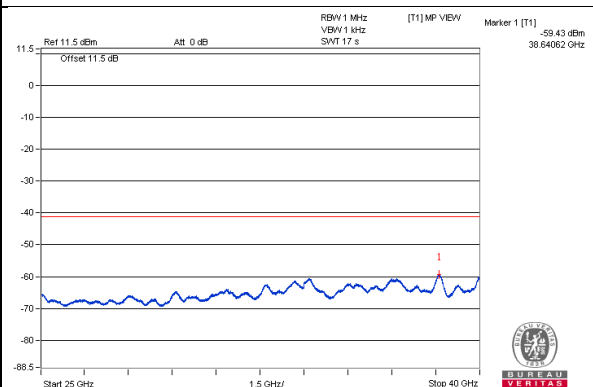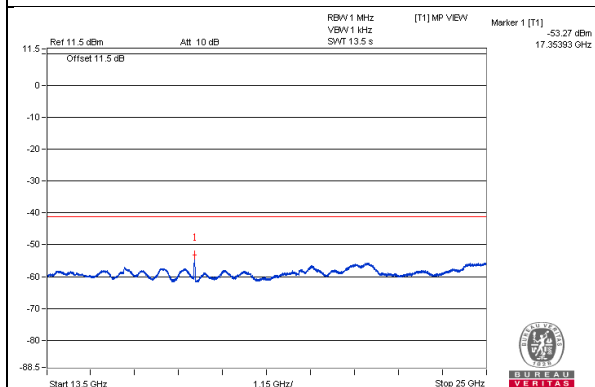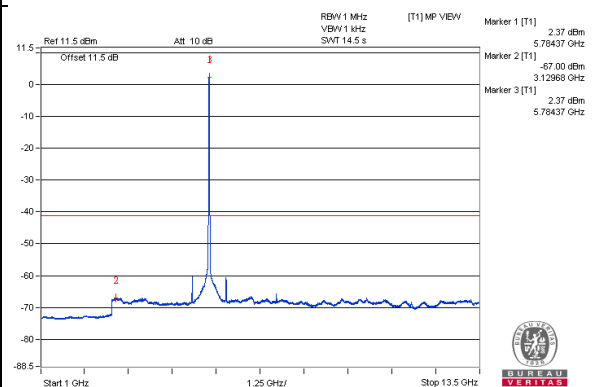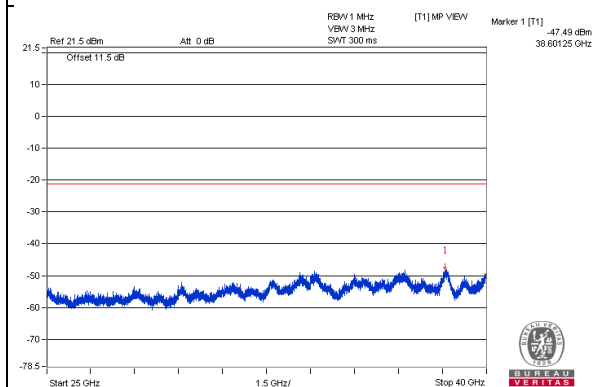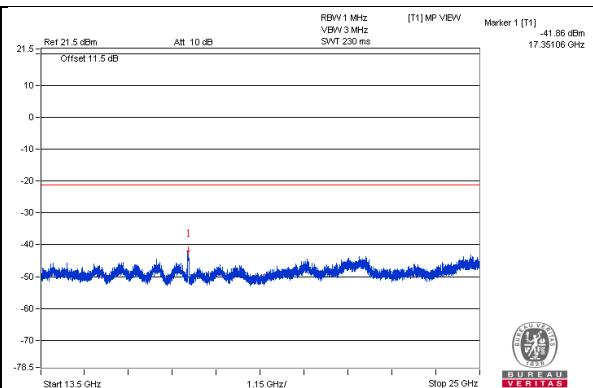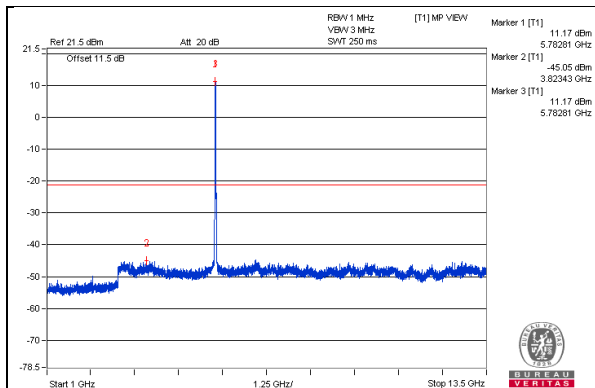

Bandedge table






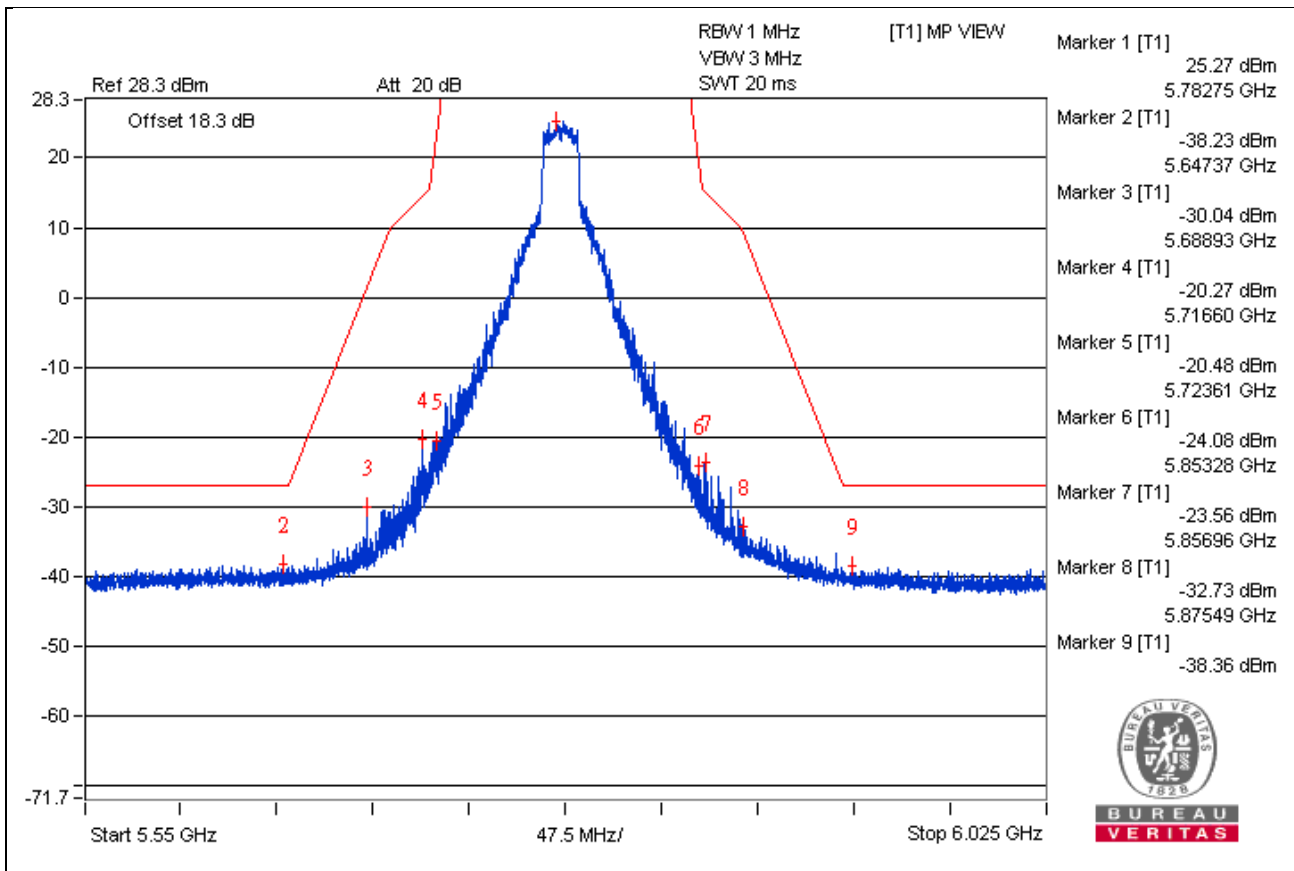


802.11ac (VHT20) – Channel 165
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3876.56 PK	55.55	74	-18.45	-46.51	6.8	-39.71
2	3882.81 AV	34.99	54	-19.01	-67.07	6.8	-60.27
3	7764.06 PK	55.06	74	-18.94	-47	6.8	-40.2
4	7767.18 AV	36.6	54	-17.4	-65.46	6.8	-58.66
5	11654.68 PK	52.77	74	-21.23	-49.29	6.8	-42.49
6	11651.56 AV	33.67	54	-20.33	-68.39	6.8	-61.59
7	17473.25 PK	57.24	68.2	-10.96	-44.82	6.8	-38.02

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

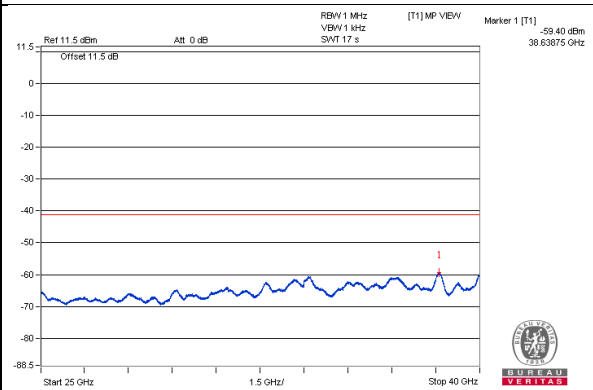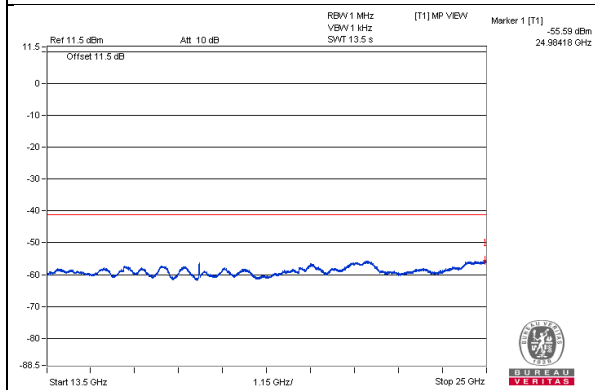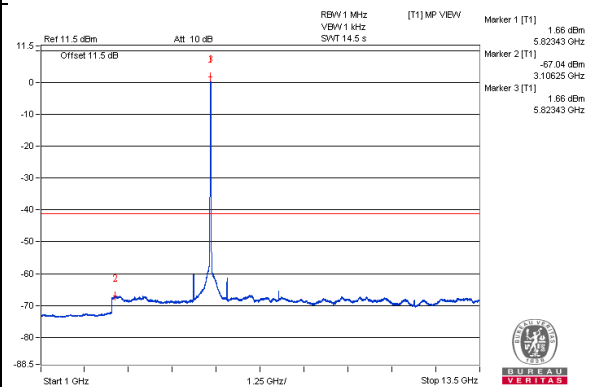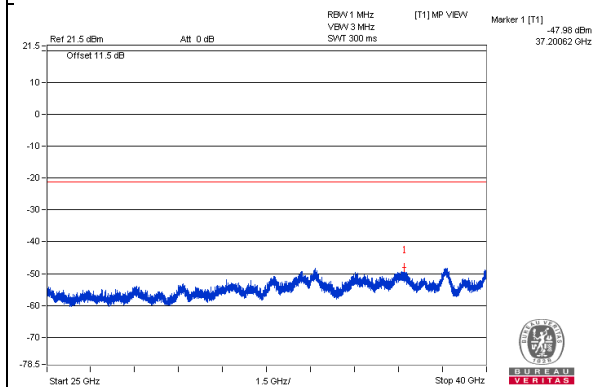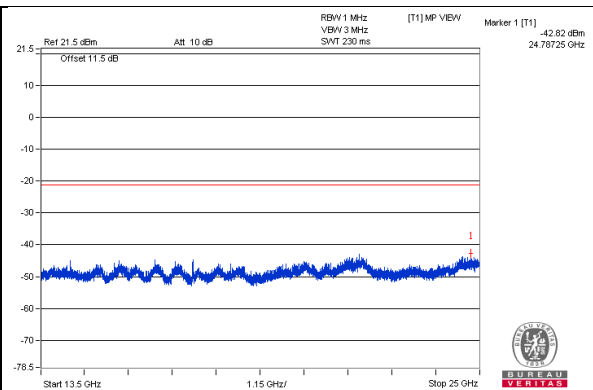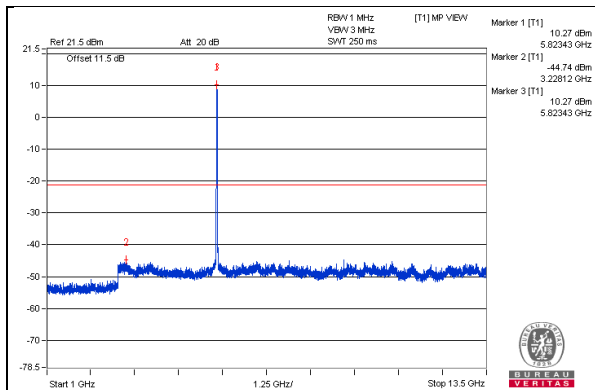

Bandedge table

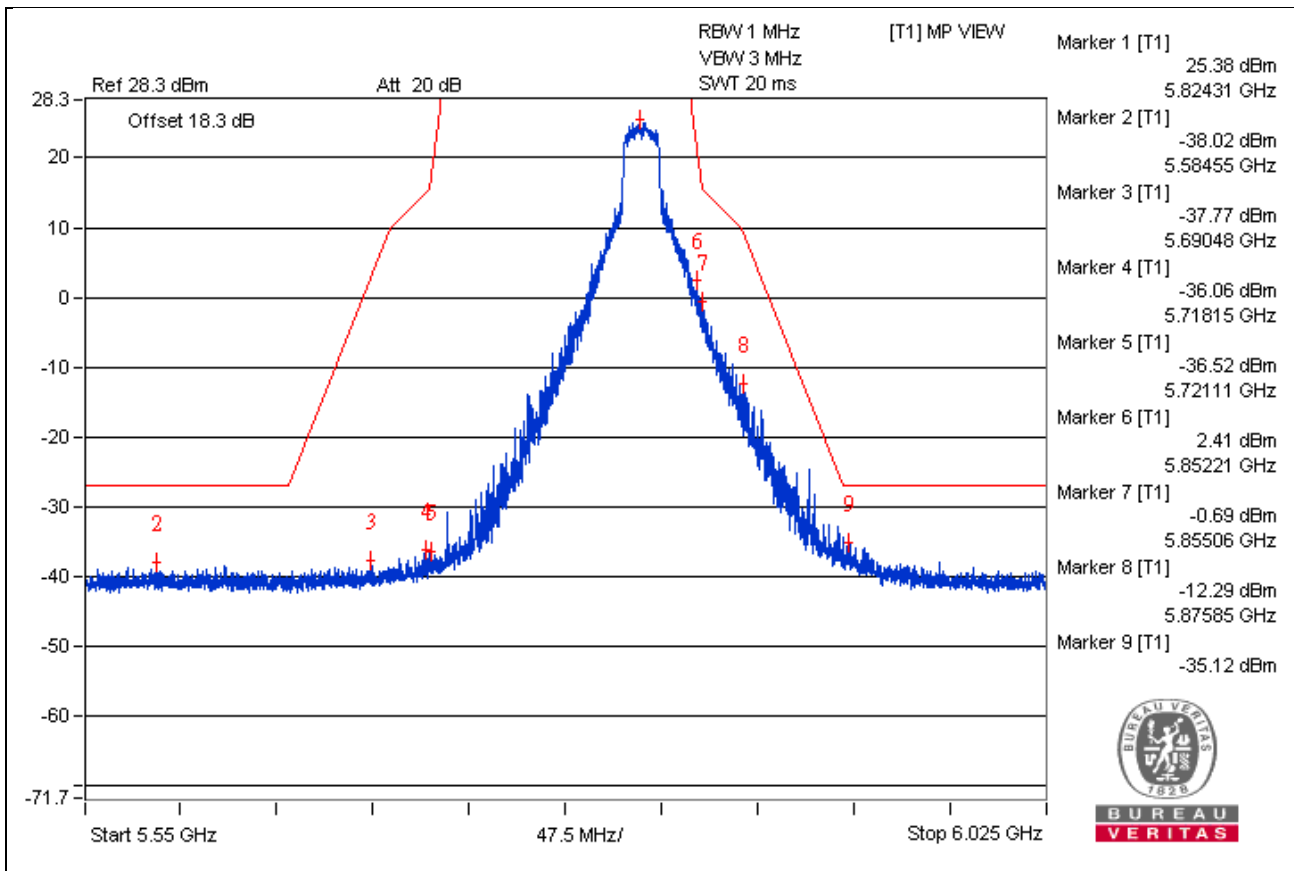







802.11ac (VHT40) - Channel 38
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3460.93 PK	54.58	74	-19.42	-47.48	6.8	-40.68
2	3459.37 AV	34.33	54	-19.67	-67.73	6.8	-60.93
3	6917.18 PK	55.34	74	-18.66	-46.72	6.8	-39.92
4	6920.31 AV	38.28	54	-15.72	-63.78	6.8	-56.98
5	10370.31 PK	55.4	74	-18.6	-46.66	6.8	-39.86
6	10385.93 AV	34.3	54	-19.7	-67.76	6.8	-60.96
7	15575.75 PK	57.94	74	-16.06	-44.12	6.8	-37.32
8	15571.43 AV	46.78	54	-7.22	-55.28	6.8	-48.48

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

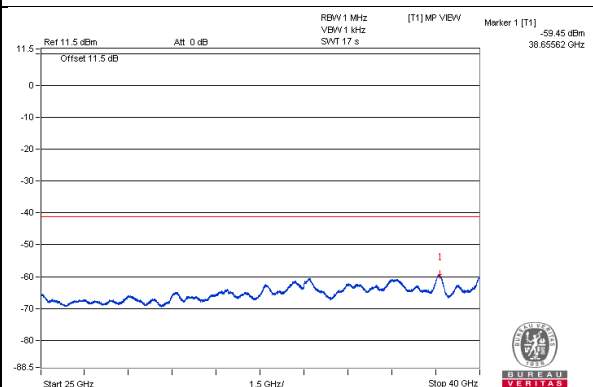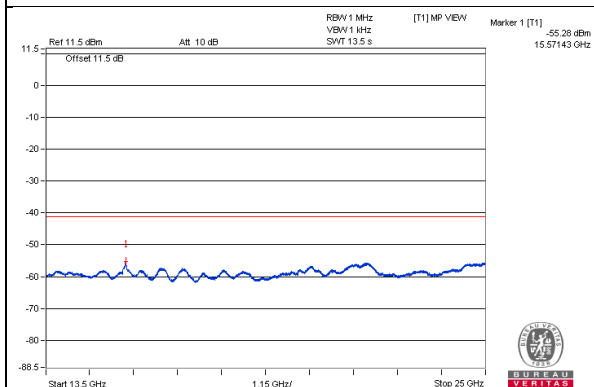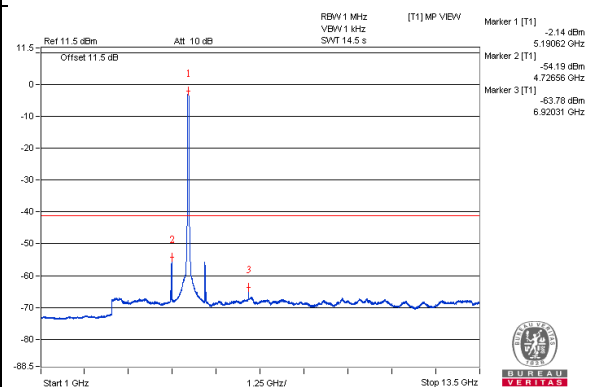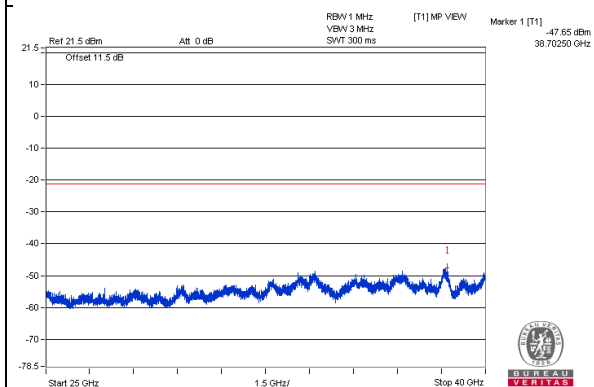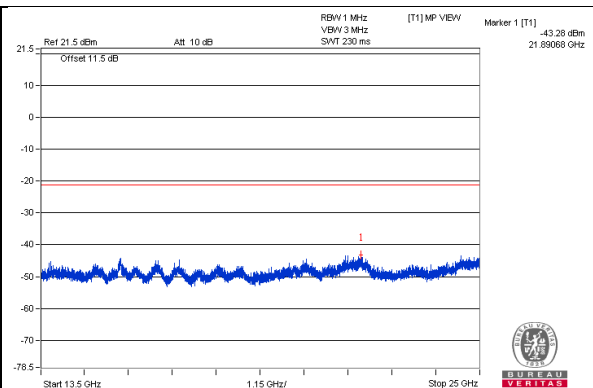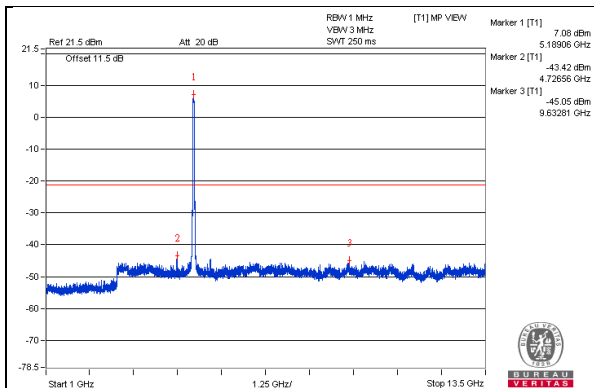


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5147.05 PK	73.4	74	-0.6	-28.66	6.8	-21.86
2	5149.85 AV	53.66	54	-0.34	-48.4	6.8	-41.6

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

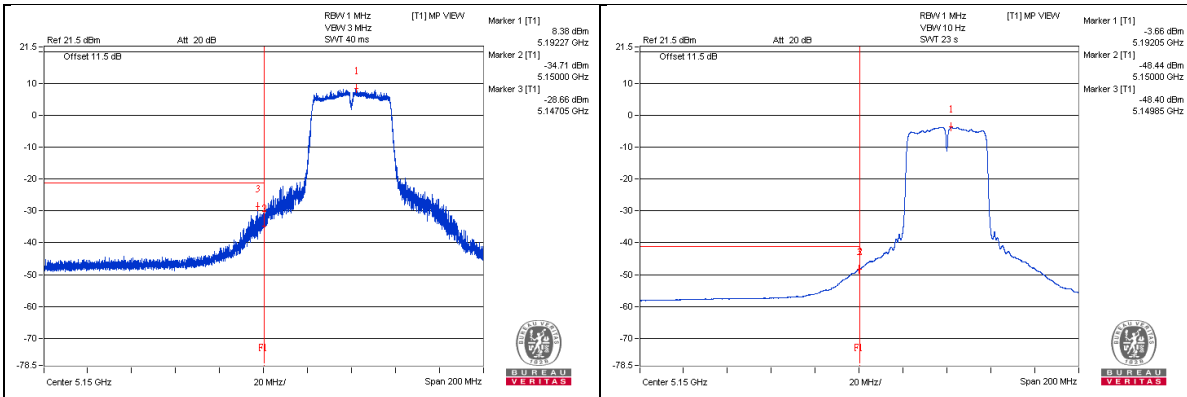







802.11ac (VHT40) - Channel 46
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3484.37 PK	54.15	74	-19.85	-47.91	6.8	-41.11
2	3485.93 AV	34.1	54	-19.9	-67.96	6.8	-61.16
3	6976.56 PK	56.44	74	-17.56	-45.62	6.8	-38.82
4	6973.43 AV	38.23	54	-15.77	-63.83	6.8	-57.03
5	10465.62 PK	54.71	74	-19.29	-47.35	6.8	-40.55
6	10450 AV	34.99	54	-19.01	-67.07	6.8	-60.27
7	15680.68 PK	56.72	74	-17.28	-45.34	6.8	-38.54
8	15682.12 AV	46.31	54	-7.69	-55.75	6.8	-48.95

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

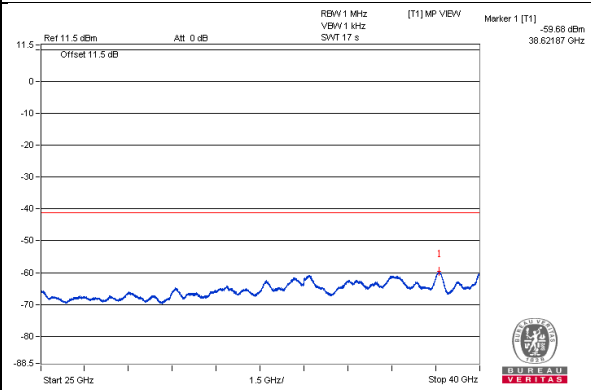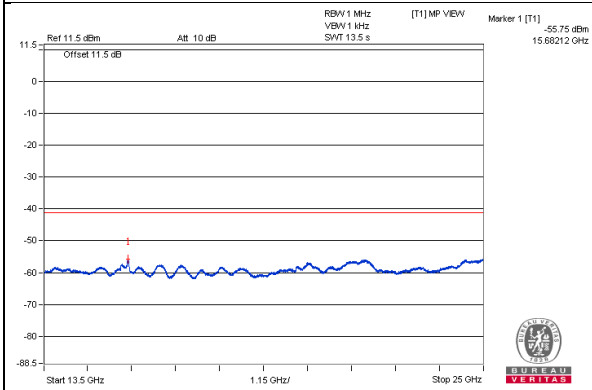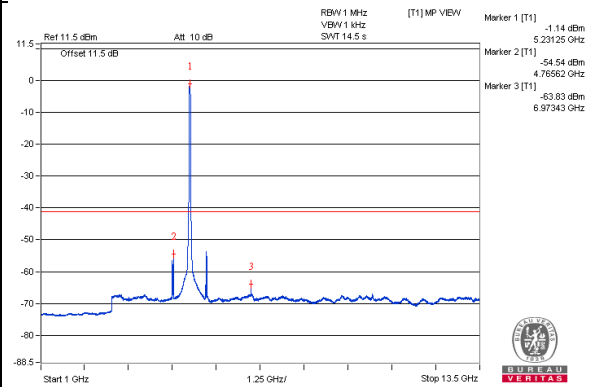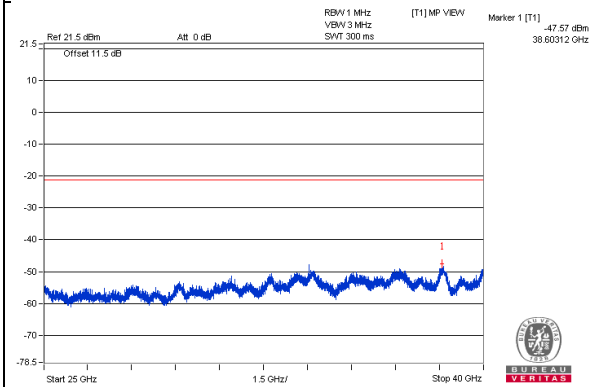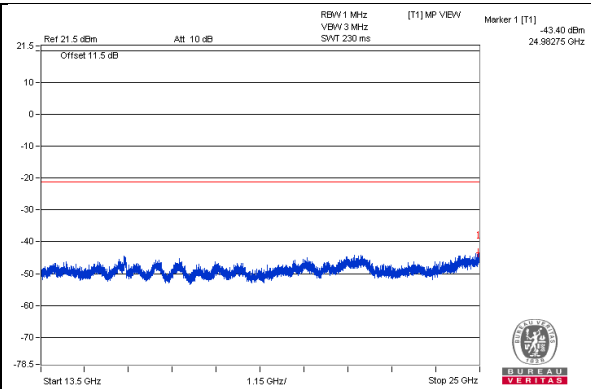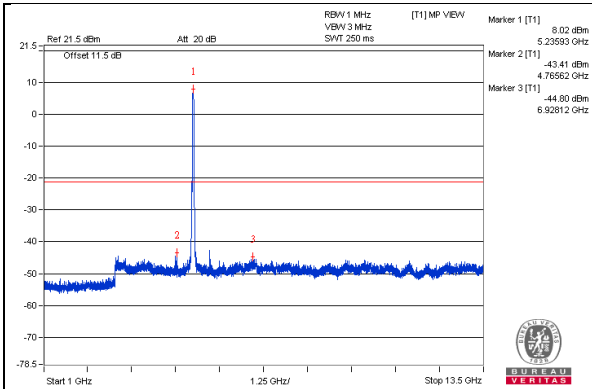


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5145.35 PK	73.23	74	-0.77	-28.83	6.8	-22.03
2	5149.85 AV	51.9	54	-2.1	-50.16	6.8	-43.36

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

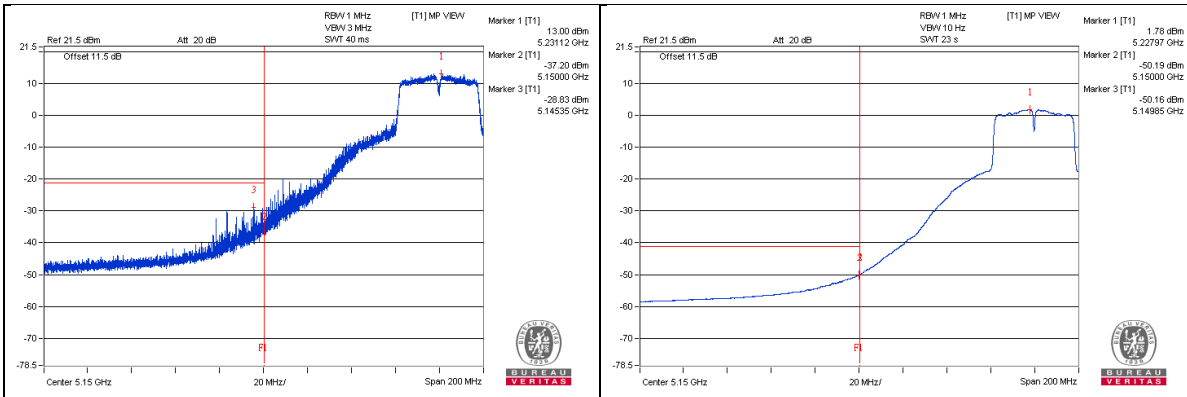







802.11ac (VHT40) - Channel 54
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3520.31 PK	54.31	74	-19.69	-47.75	6.8	-40.95
2	3512.5 AV	34.09	54	-19.91	-67.97	6.8	-61.17
3	7021.87 PK	56.02	74	-17.98	-46.04	6.8	-39.24
4	7026.56 AV	37.15	54	-16.85	-64.91	6.8	-58.11
5	10539.06 PK	54.68	74	-19.32	-47.38	6.8	-40.58
6	10546.87 AV	34.06	54	-19.94	-68	6.8	-61.2
7	15812.93 PK	57.58	74	-16.42	-44.48	6.8	-37.68
8	15815.81 AV	46	54	-8	-56.06	6.8	-49.26

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

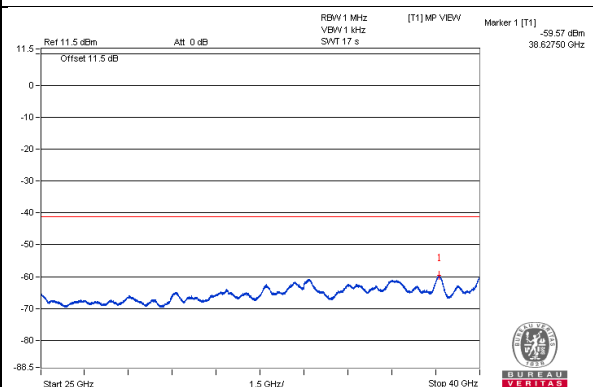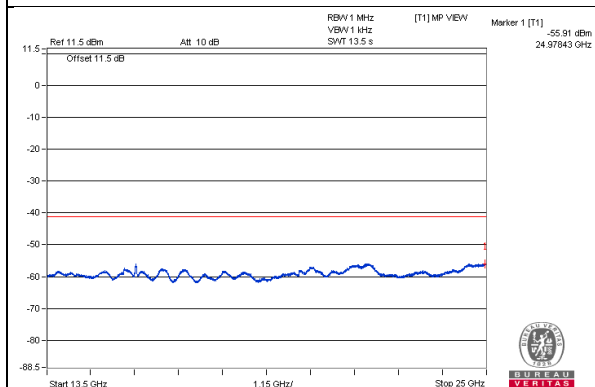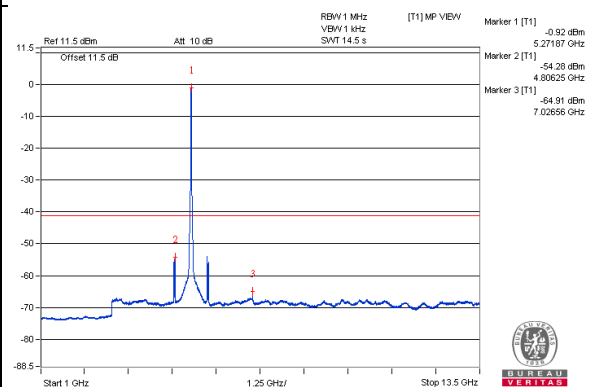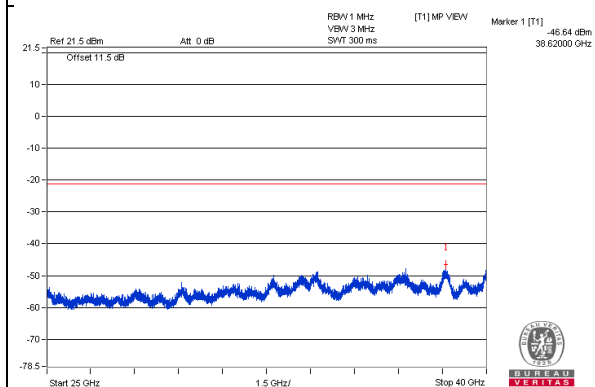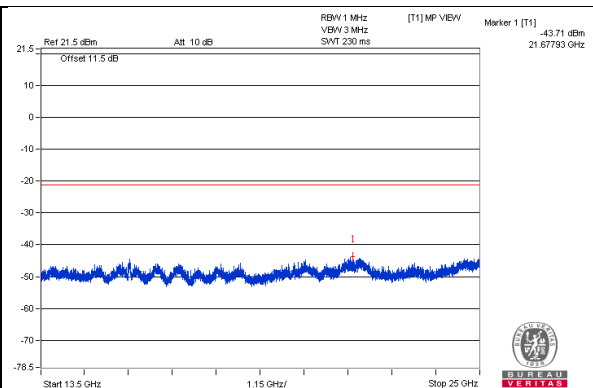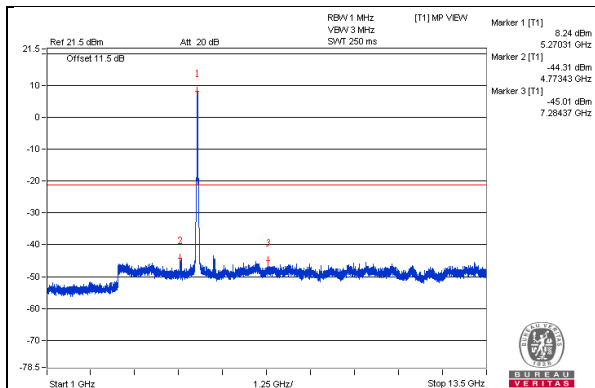


Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5368.1 PK	69.74	74	-4.26	-32.32	6.8	-25.52
2	5350.85 AV	52	54	-2	-50.06	6.8	-43.26

Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.






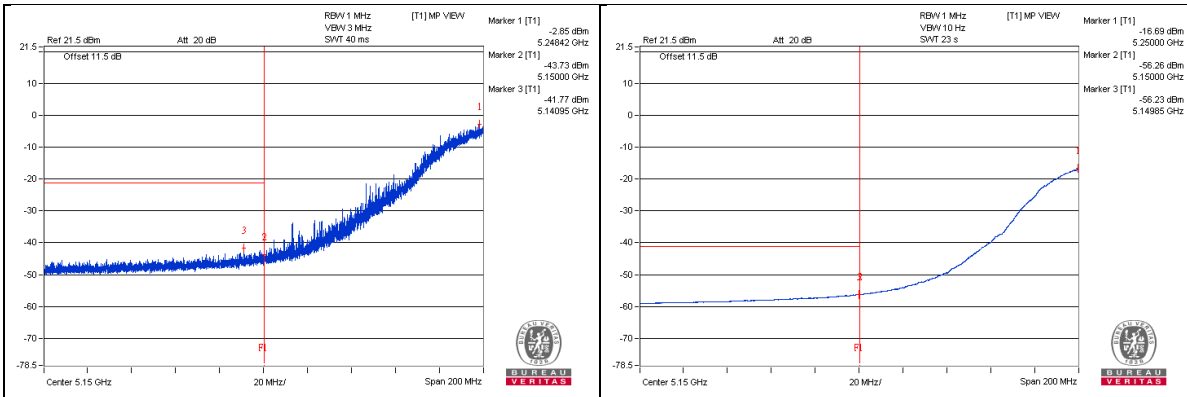


802.11ac (VHT40) - Channel 62
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3550 PK	53.84	74	-20.16	-48.22	6.8	-41.42
2	3539.06 AV	34.28	54	-19.72	-67.78	6.8	-60.98
3	7087.5 PK	54.56	74	-19.44	-47.5	6.8	-40.7
4	7079.68 AV	35.27	54	-18.73	-66.79	6.8	-59.99
5	10625 PK	54.39	74	-19.61	-47.67	6.8	-40.87
6	10621.87 AV	33.93	54	-20.07	-68.13	6.8	-61.33
7	15922.18 PK	57.25	74	-16.75	-44.81	6.8	-38.01
8	15926.5 AV	46	54	-8	-56.06	6.8	-49.26

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

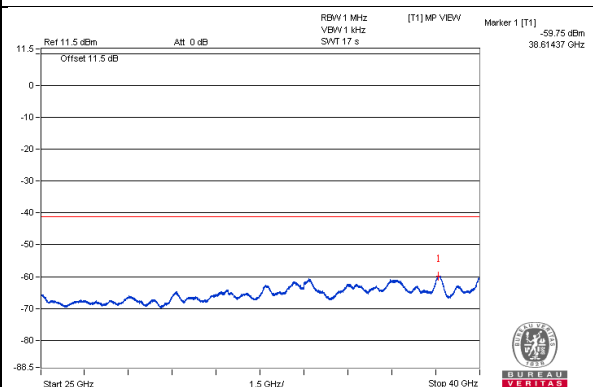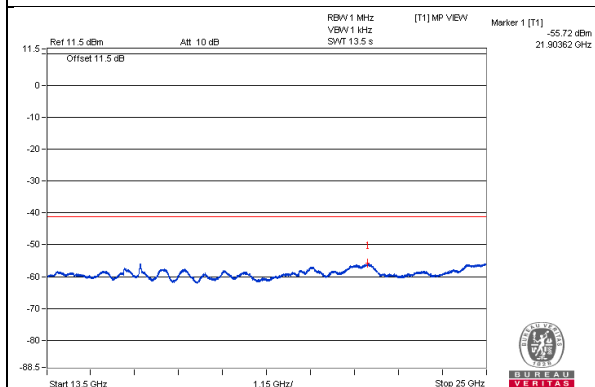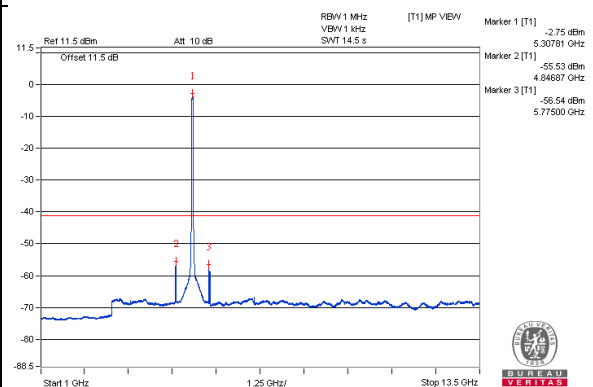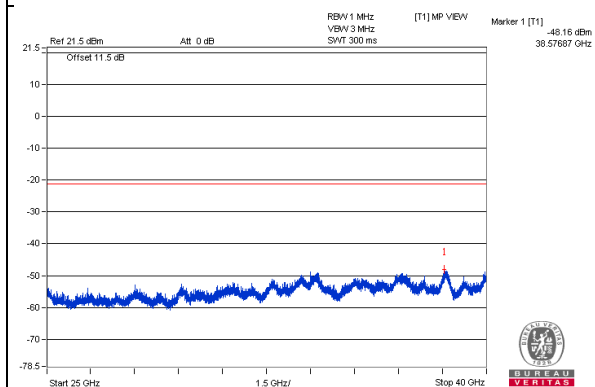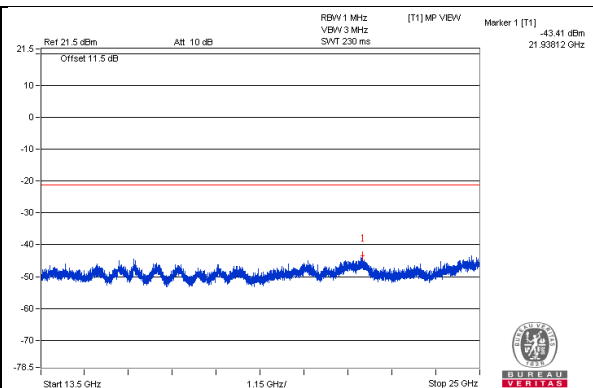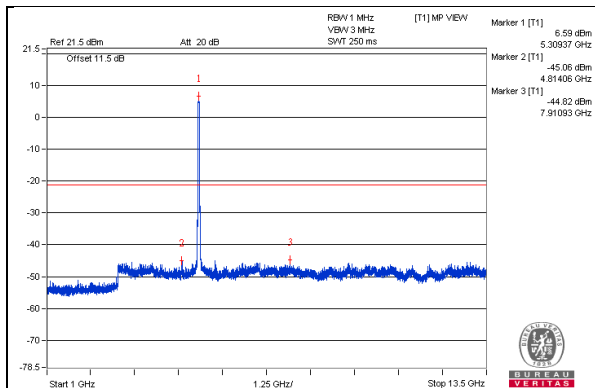


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5350.07 PK	72.64	74	-1.36	-29.42	6.8	-22.62
2	5350 AV	53.21	54	-0.79	-48.85	6.8	-42.05

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.






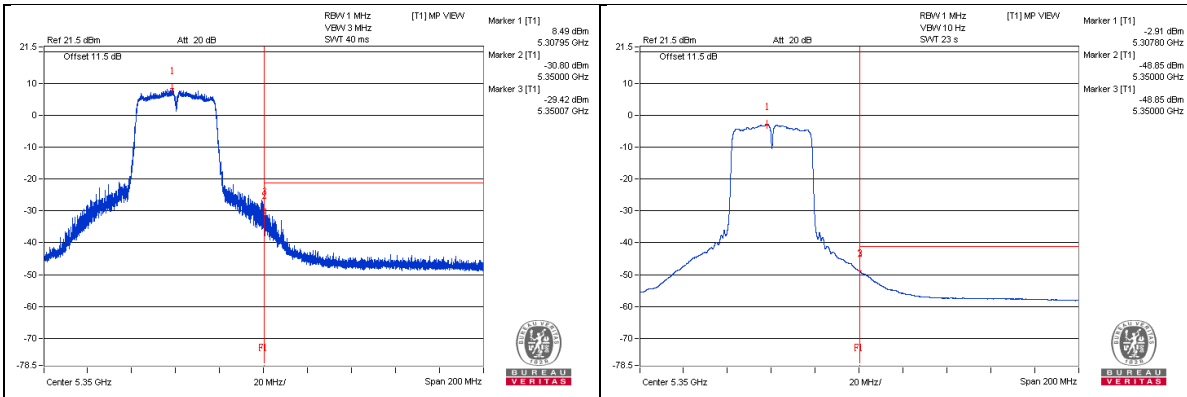


802.11ac (VHT40) – Channel 102
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3679.68 PK	55.34	74	-18.66	-46.72	6.8	-39.92
2	3673.43 AV	35.26	54	-18.74	-66.8	6.8	-60
3	7340.62 PK	55.66	74	-18.34	-46.4	6.8	-39.6
4	7346.87 AV	35.95	54	-18.05	-66.11	6.8	-59.31
5	11028.12 PK	52.89	74	-21.11	-49.17	6.8	-42.37
6	11015.62 AV	34.53	54	-19.47	-67.53	6.8	-60.73
7	16530.25 PK	55.87	68.2	-12.33	-46.19	6.8	-39.39

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

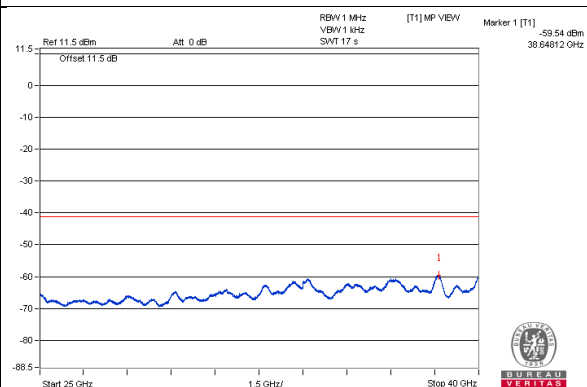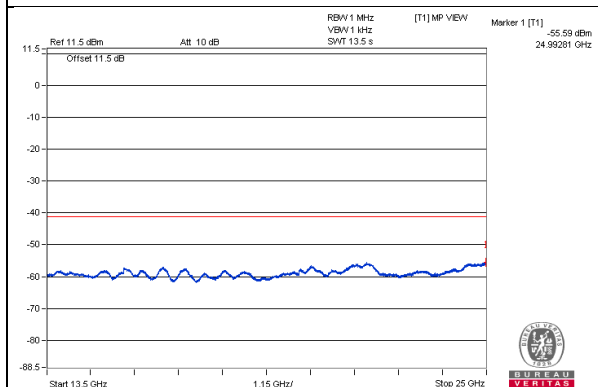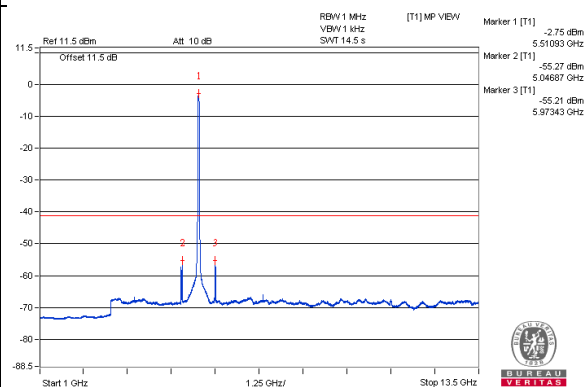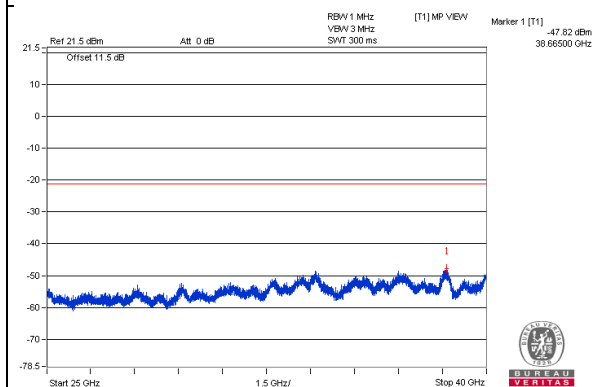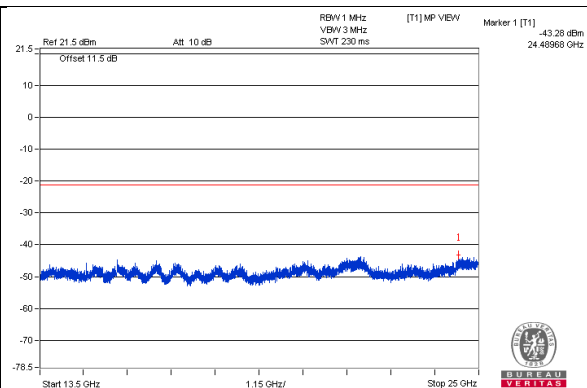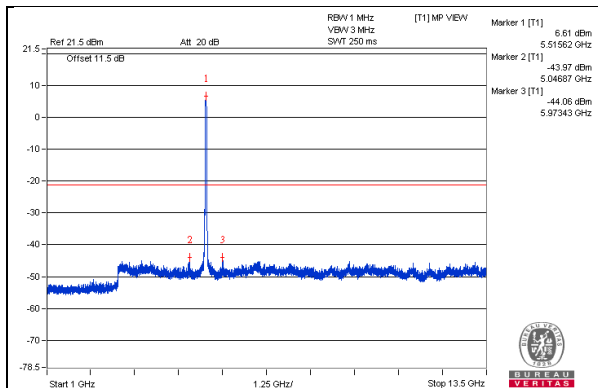


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5464.96 PK	72.17	74	-1.83	-29.89	6.8	-23.09
2	5470 AV	53.34	54	-0.66	-48.72	6.8	-41.92

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.






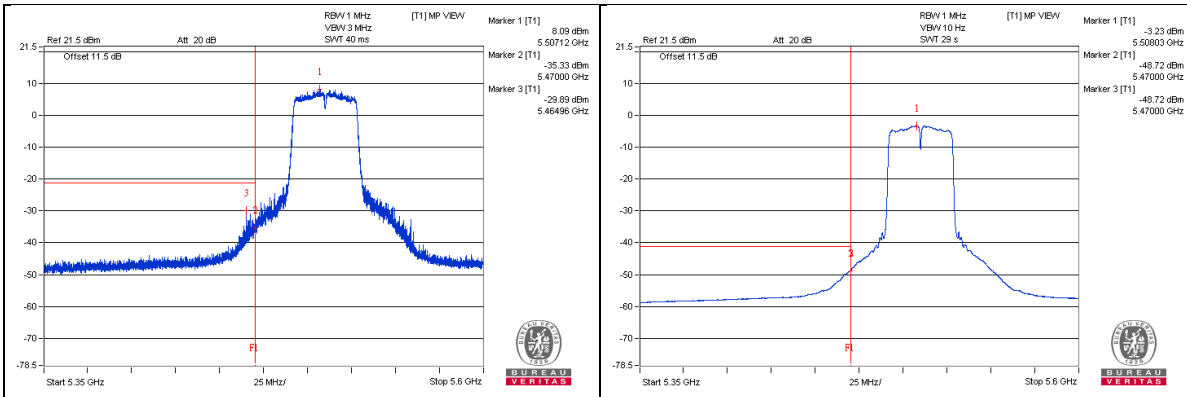


802.11ac (VHT40) – Channel 110
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3704.68 PK	55.41	74	-18.59	-46.65	6.8	-39.85
2	3700 AV	34.83	54	-19.17	-67.23	6.8	-60.43
3	7396.87 PK	55.55	74	-18.45	-46.51	6.8	-39.71
4	7400 AV	35.4	54	-18.6	-66.66	6.8	-59.86
5	11104.68 PK	53.46	74	-20.54	-48.6	6.8	-41.8
6	11100 AV	33.27	54	-20.73	-68.79	6.8	-61.99
7	16648.12 PK	59.51	68.2	-8.69	-42.55	6.8	-35.75

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

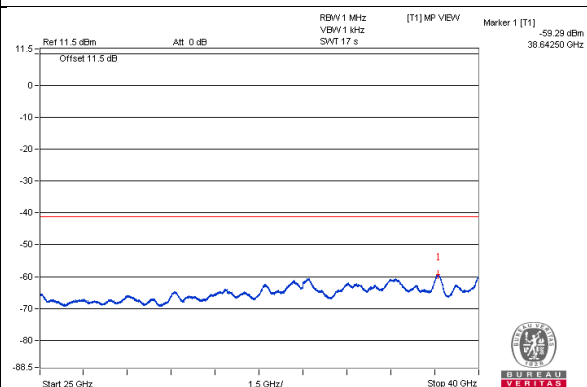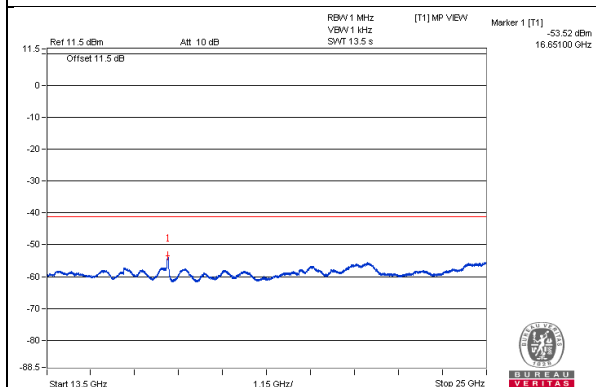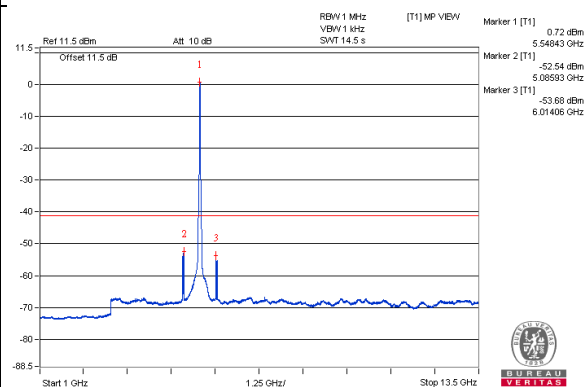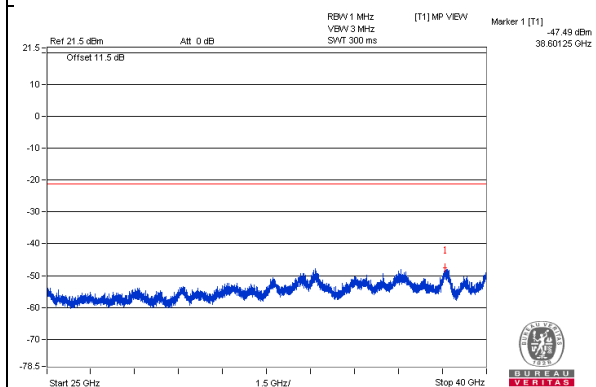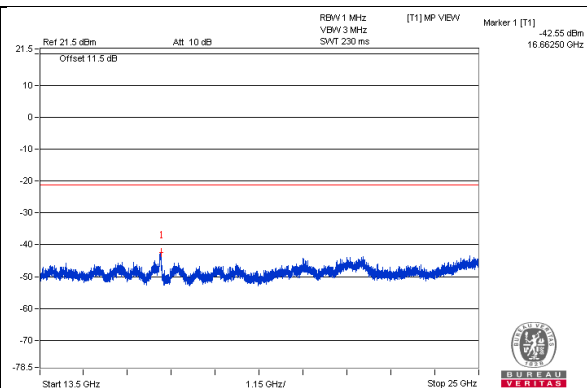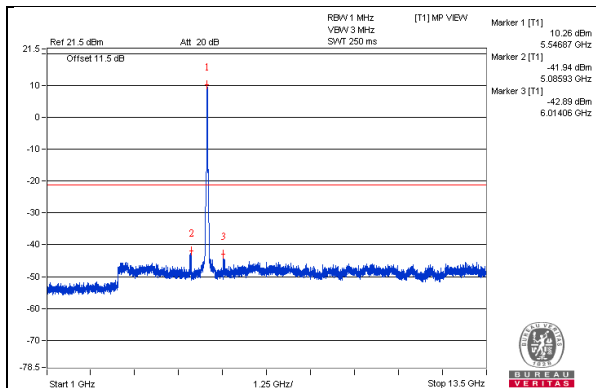


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5464.43 PK	72.36	74	-1.64	-29.7	6.8	-22.9
2	5469.87 AV	53.58	54	-0.42	-48.48	6.8	-41.68

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

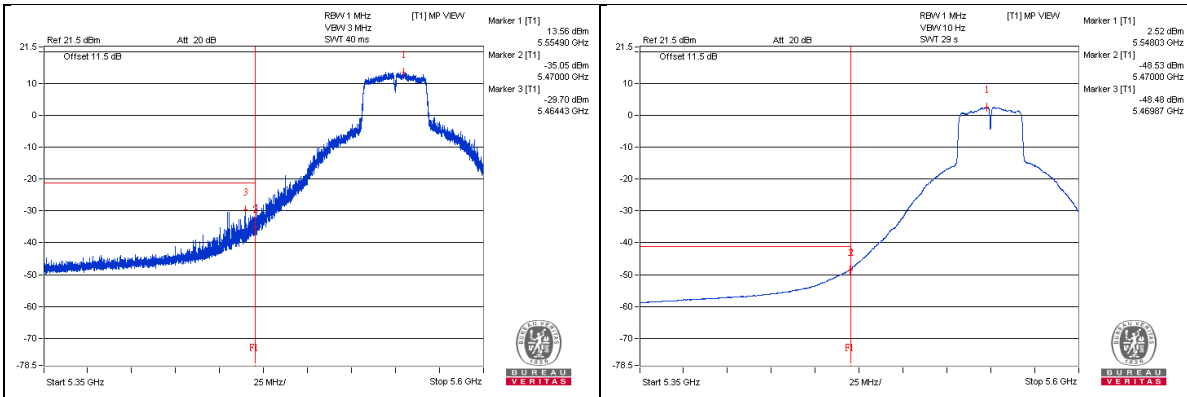







802.11ac (VHT40) – Channel 134
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.25 PK	56.43	74	-17.57	-45.63	6.8	-38.83
2	3779.68 AV	35.09	54	-18.91	-66.97	6.8	-60.17
3	7559.37 PK	55.23	74	-18.77	-46.83	6.8	-40.03
4	7559.37 AV	35.67	54	-18.33	-66.39	6.8	-59.59
5	11350 PK	55.12	74	-18.88	-46.94	6.8	-40.14
6	11340.62 AV	37.82	54	-16.18	-64.24	6.8	-57.44
7	17010.37 PK	58.64	68.2	-9.56	-43.42	6.8	-36.62

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

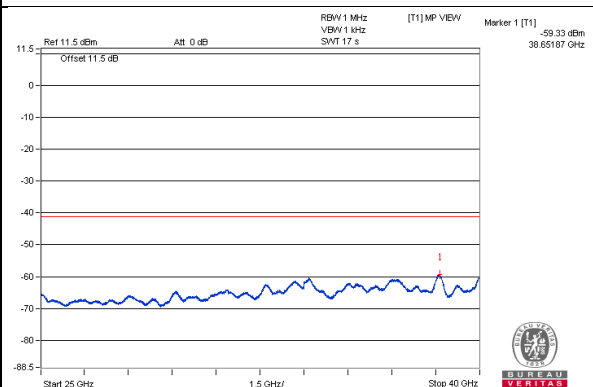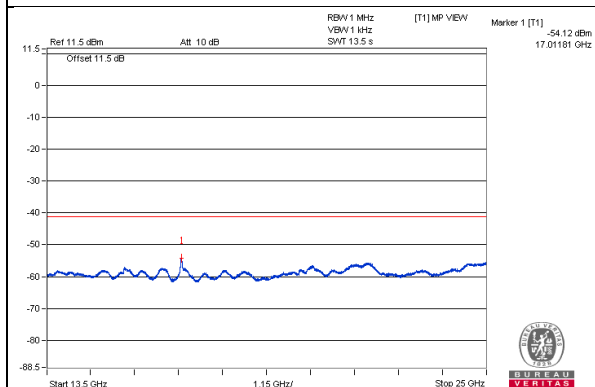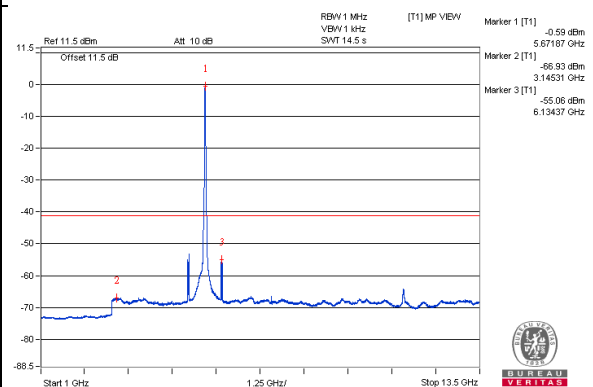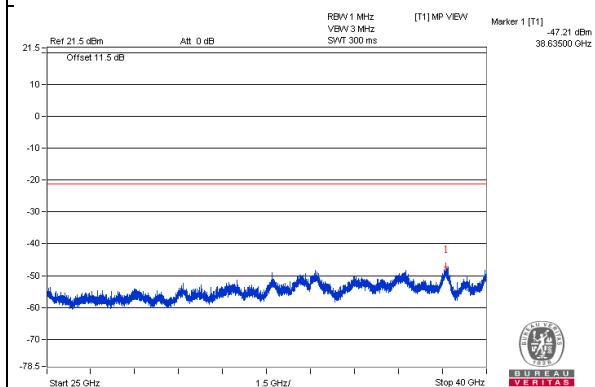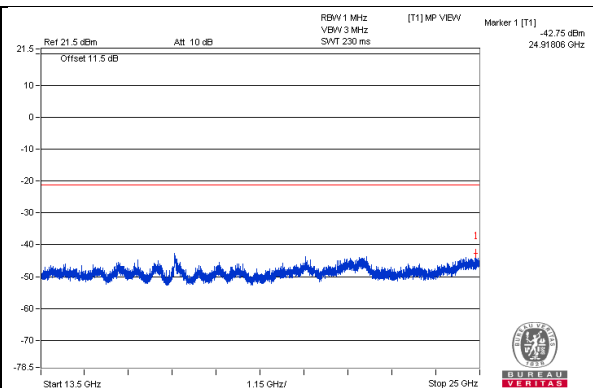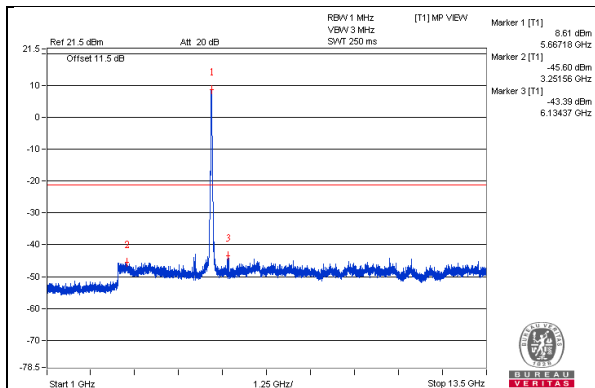


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5725.75 PK	73.38	74	-0.62	-28.68	6.8	-21.88
2	5725.02 AV	53.22	54	-0.78	-48.84	6.8	-42.04

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






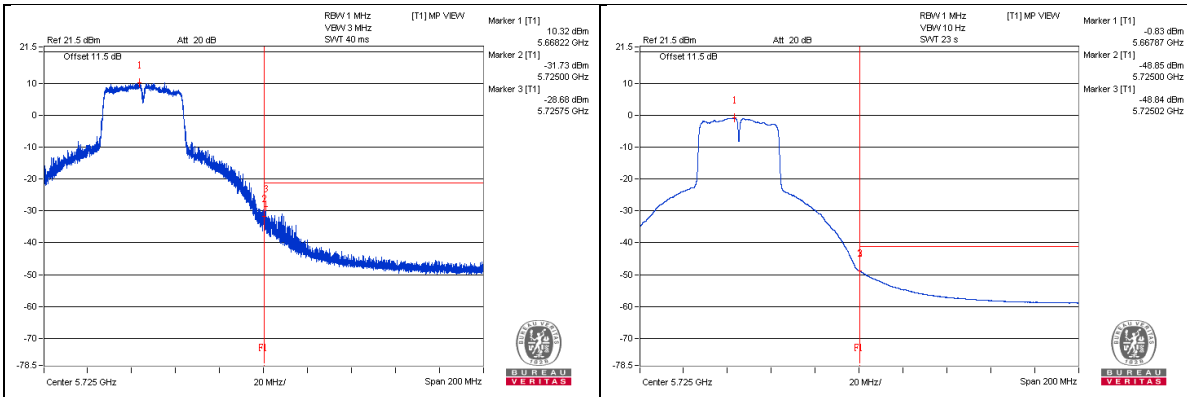


802.11ac (VHT40) – Channel 142
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.5 PK	55.88	74	-18.12	-46.18	6.8	-39.38
2	3806.25 AV	34.88	54	-19.12	-67.18	6.8	-60.38
3	7618.75 PK	55.97	74	-18.03	-46.09	6.8	-39.29
4	7614.06 AV	35.73	54	-18.27	-66.33	6.8	-59.53
5	11425 PK	56.12	74	-17.88	-45.94	6.8	-39.14
6	11418.75 AV	38.85	54	-15.15	-63.21	6.8	-56.41
7	17126.81 PK	61.89	68.2	-6.31	-40.17	6.8	-33.37

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

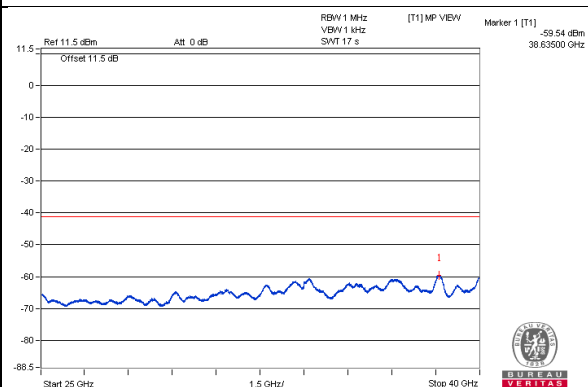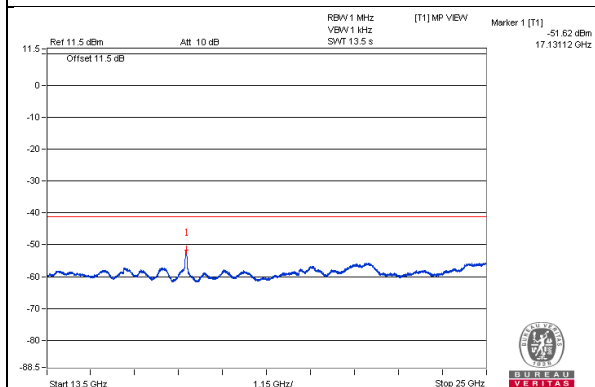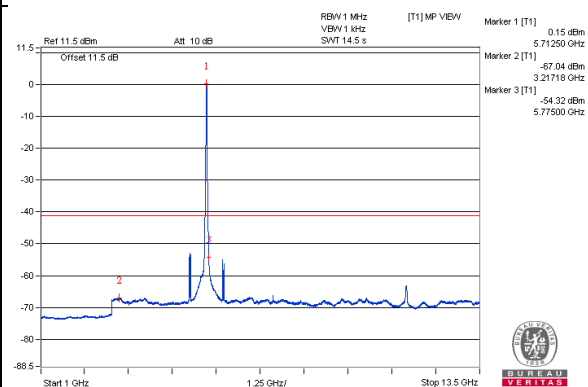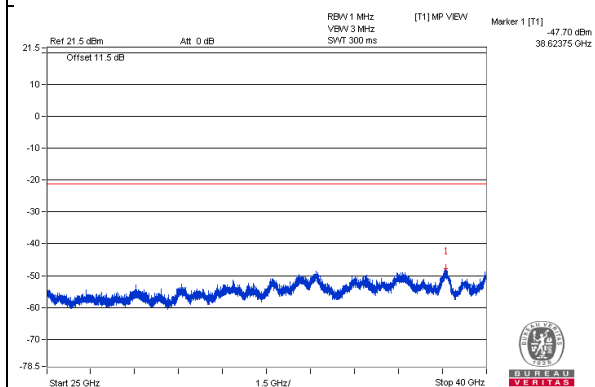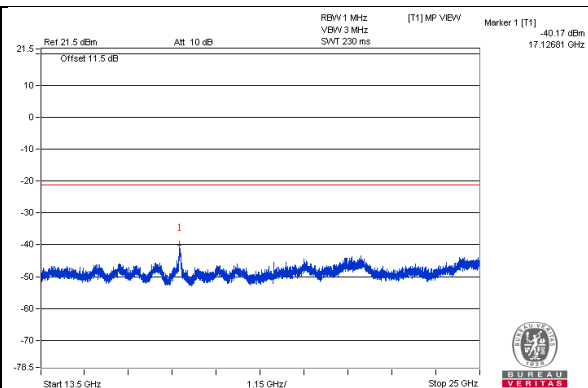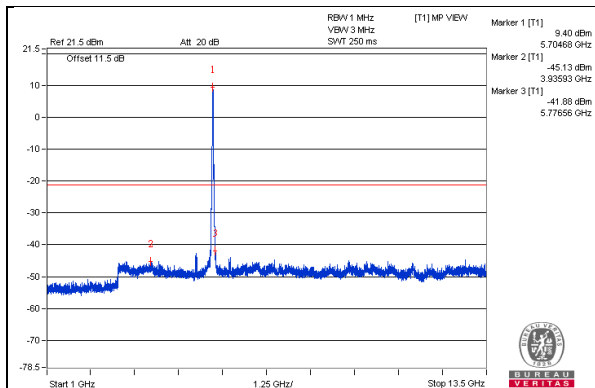


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5857.67 PK	67.22	74	-6.78	-34.84	6.8	-28.04
2	5850.02 AV	47.21	54	-6.79	-54.85	6.8	-48.05

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.






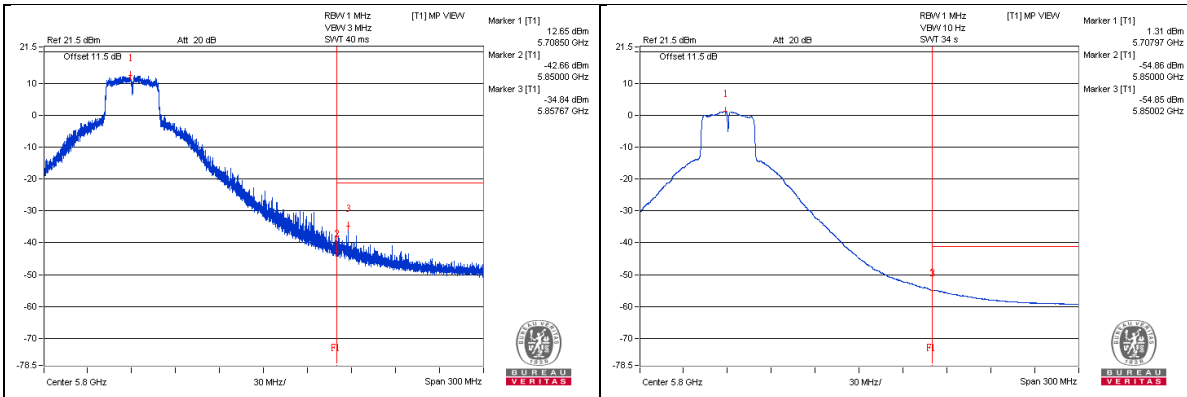


802.11ac (VHT40) – Channel 151
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.5 PK	55.31	74	-18.69	-46.75	6.8	-39.95
2	3835.93 AV	34.69	54	-19.31	-67.37	6.8	-60.57
3	7671.87 PK	55.4	74	-18.6	-46.66	6.8	-39.86
4	7673.43 AV	37.34	54	-16.66	-64.72	6.8	-57.92
5	11503.12 PK	54.48	74	-19.52	-47.58	6.8	-40.78
6	11500 AV	37.28	54	-16.72	-64.78	6.8	-57.98
7	17261.93 PK	61.02	68.2	-7.18	-41.04	6.8	-34.24

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

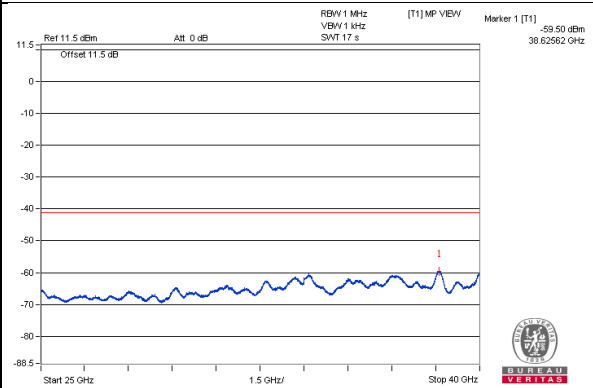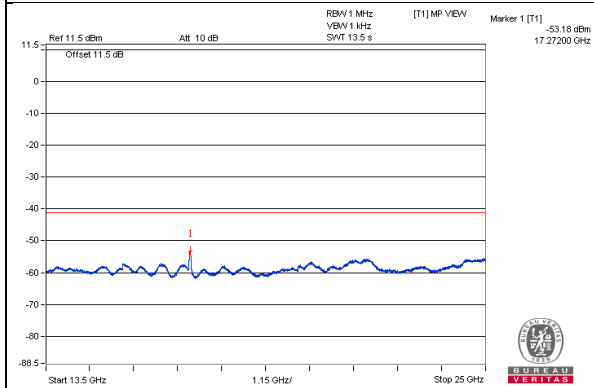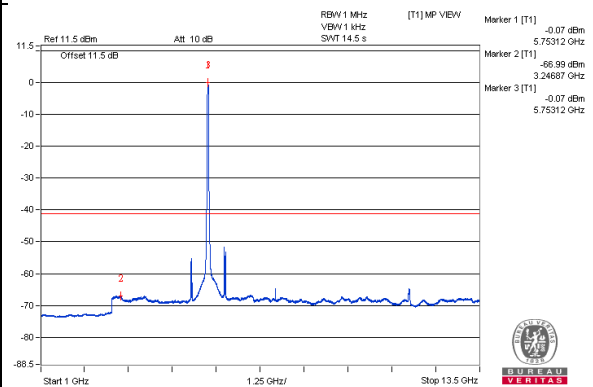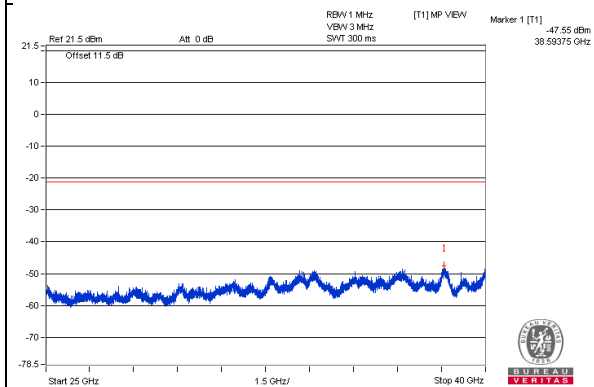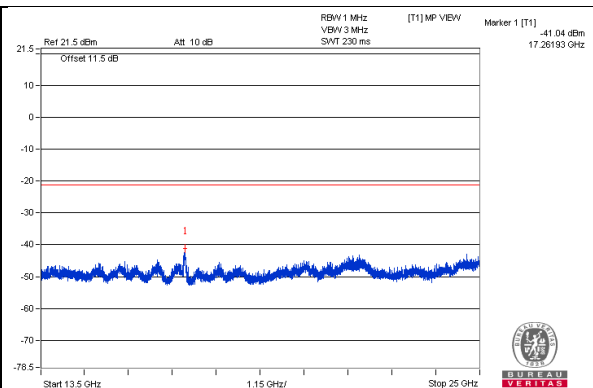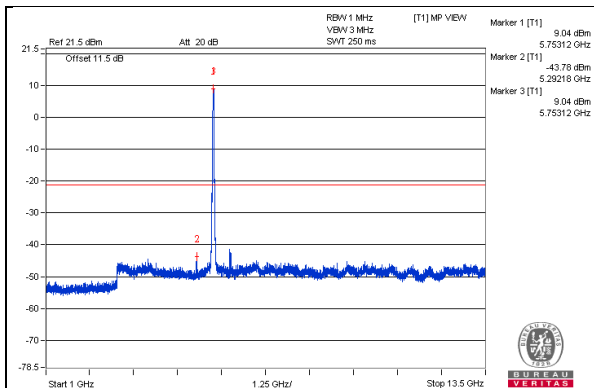

Bandedge table






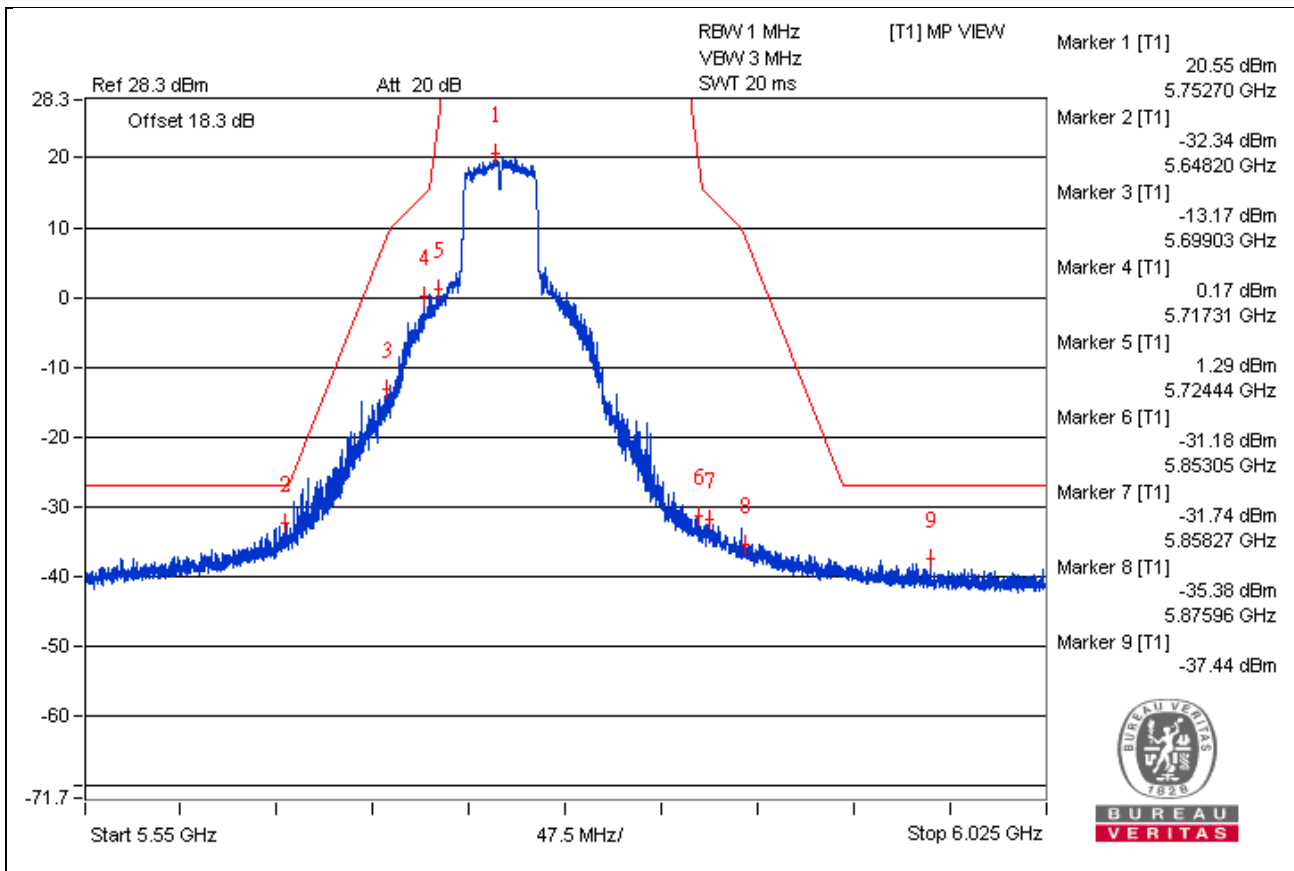


802.11ac (VHT40) – Channel 159
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3868.75 PK	54.87	74	-19.13	-47.19	6.8	-40.39
2	3862.5 AV	35.12	54	-18.88	-66.94	6.8	-60.14
3	7734.37 PK	54.3	74	-19.7	-47.76	6.8	-40.96
4	7726.56 AV	36.3	54	-17.7	-65.76	6.8	-58.96
5	11598.43 PK	52.75	74	-21.25	-49.31	6.8	-42.51
6	11590.62 AV	32.83	54	-21.17	-69.23	6.8	-62.43
7	17384.12 PK	58.38	68.2	-9.82	-43.68	6.8	-36.88

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

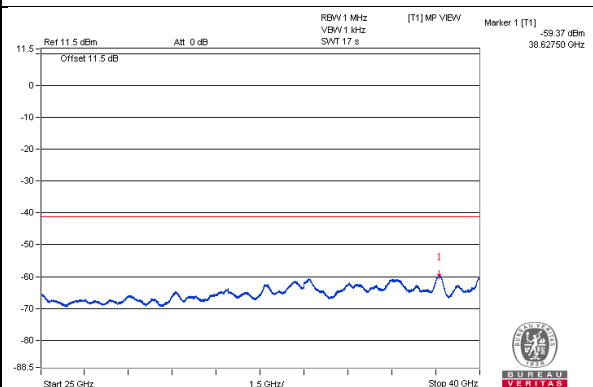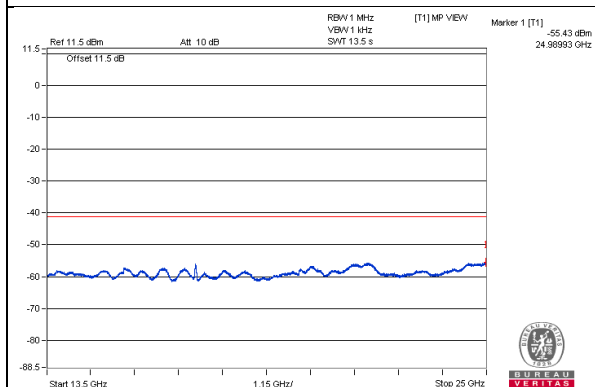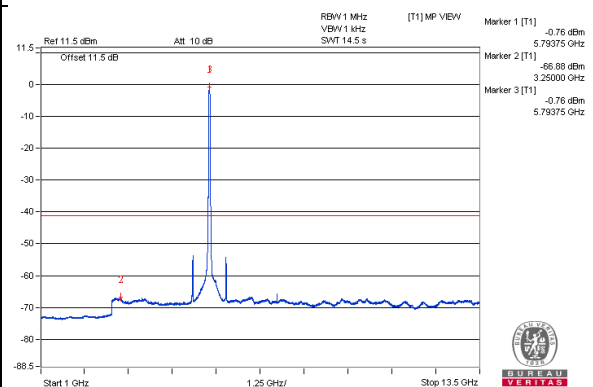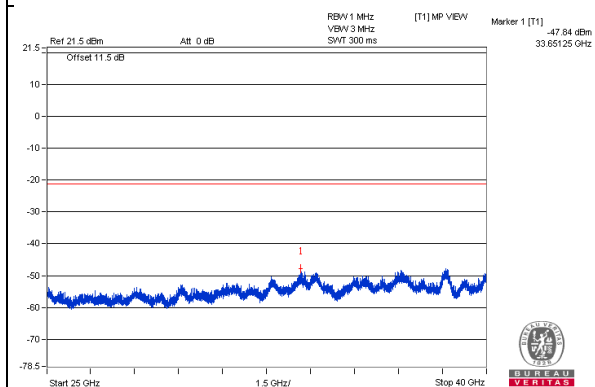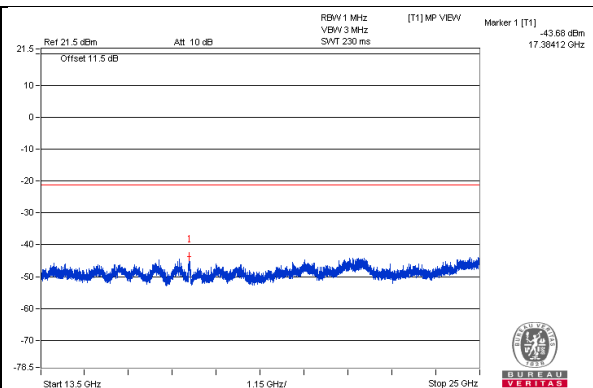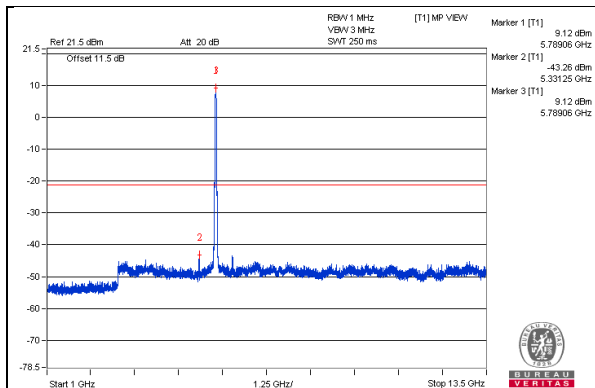

Bandedge table

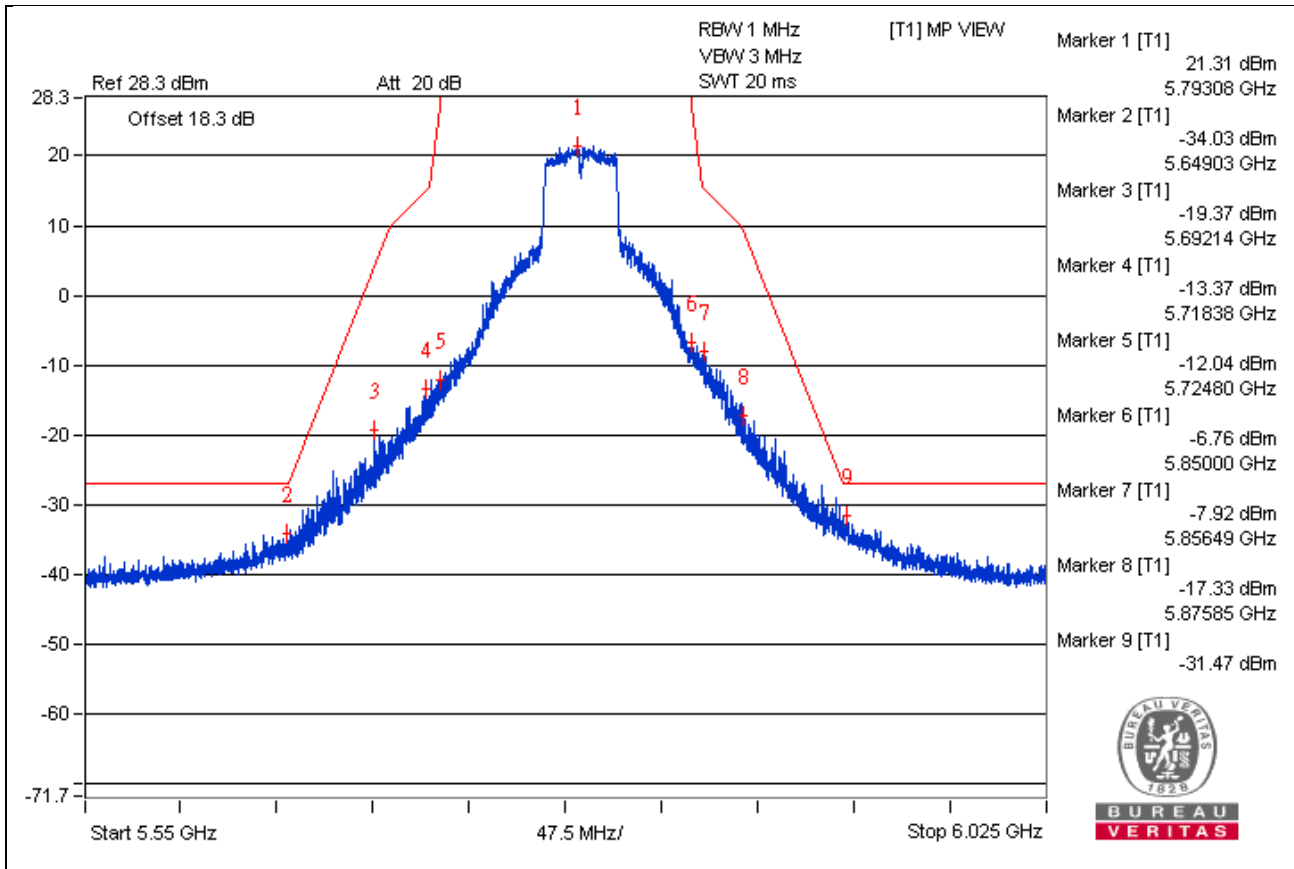







802.11ac (VHT80) - Channel 42
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3475 PK	54.9	74	-19.1	-47.16	6.8	-40.36
2	3473.43 AV	34.66	54	-19.34	-67.4	6.8	-60.6
3	6940.62 PK	55.3	74	-18.7	-46.76	6.8	-39.96
4	6946.87 AV	37.87	54	-16.13	-64.19	6.8	-57.39
5	10417.18 PK	55.85	74	-18.15	-46.21	6.8	-39.41
6	10420.31 AV	34.21	54	-19.79	-67.85	6.8	-61.05
7	15637.56 PK	57.34	74	-16.66	-44.72	6.8	-37.92
8	15623.18 AV	45.18	54	-8.82	-56.88	6.8	-50.08

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

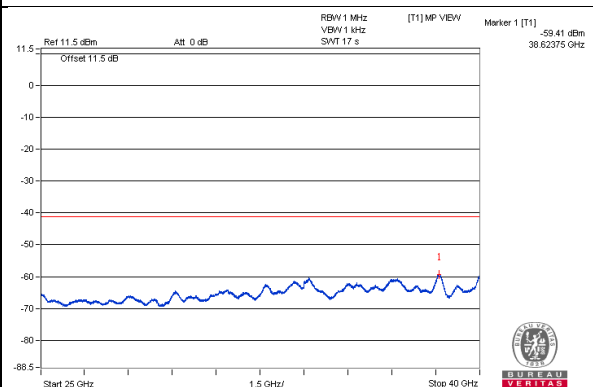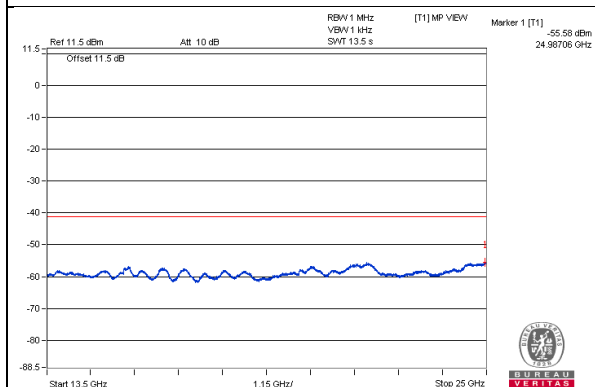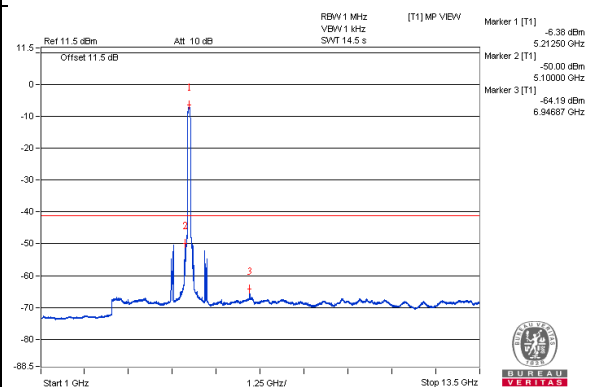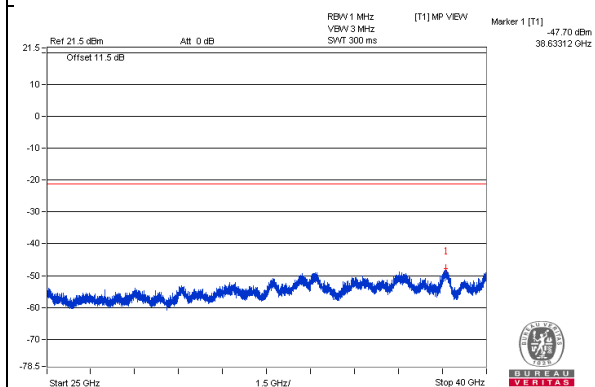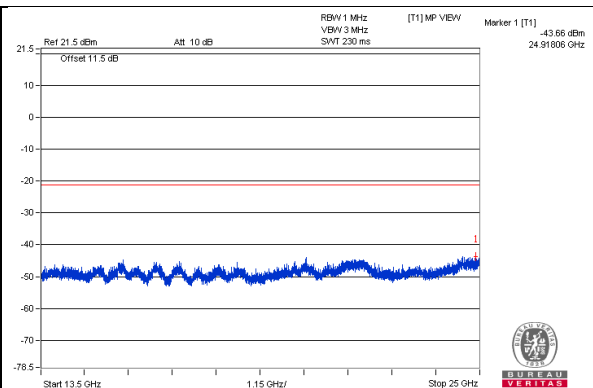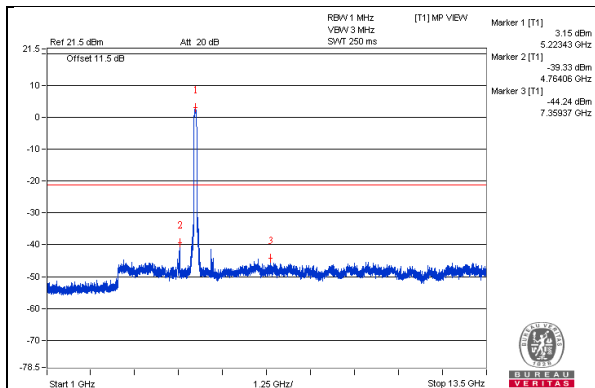


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5141.3 PK	70.53	74	-3.47	-31.53	6.8	-24.73
2	5141.27 AV	53.13	54	-0.87	-48.93	6.8	-42.13

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

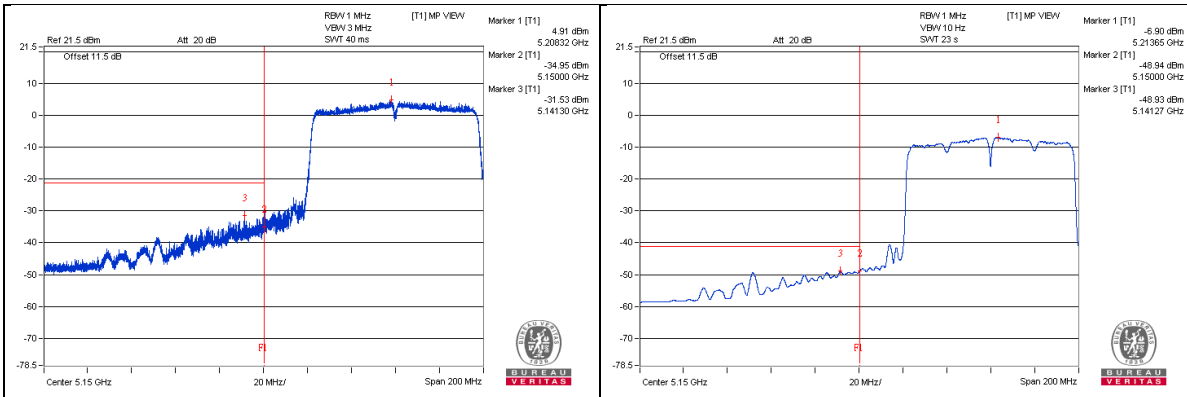







802.11ac (VHT80) - Channel 58
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3525 PK	54.28	74	-19.72	-47.78	6.8	-40.98
2	3526.56 AV	34.53	54	-19.47	-67.53	6.8	-60.73
3	7057.81 PK	54.81	74	-19.19	-47.25	6.8	-40.45
4	7053.12 AV	36.85	54	-17.15	-65.21	6.8	-58.41
5	10579.68 PK	54.17	74	-19.83	-47.89	6.8	-41.09
6	10570.31 AV	33.68	54	-20.32	-68.38	6.8	-61.58
7	15874.75 PK	54.91	74	-19.09	-47.15	6.8	-40.35
8	15879.06 AV	43.9	54	-10.1	-58.16	6.8	-51.36

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

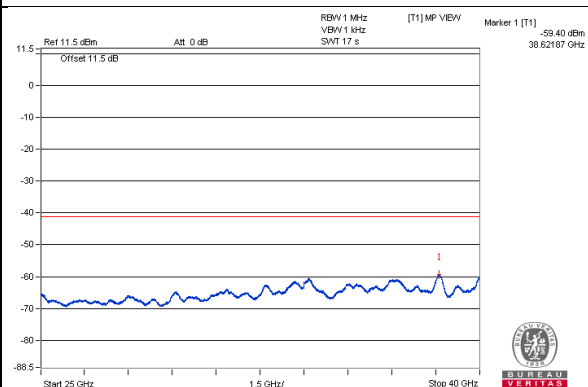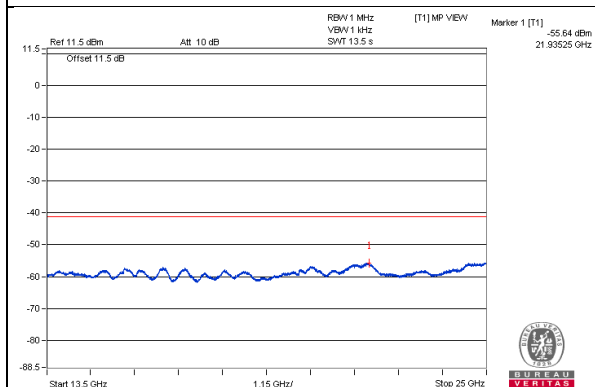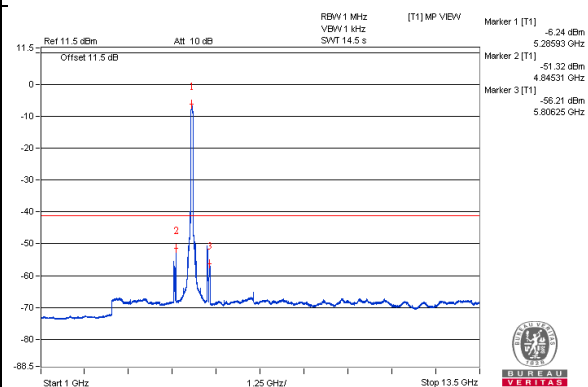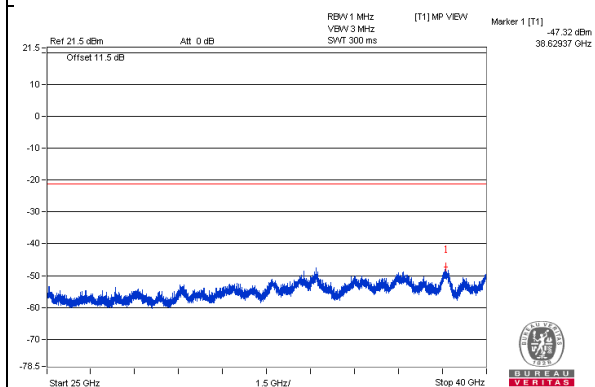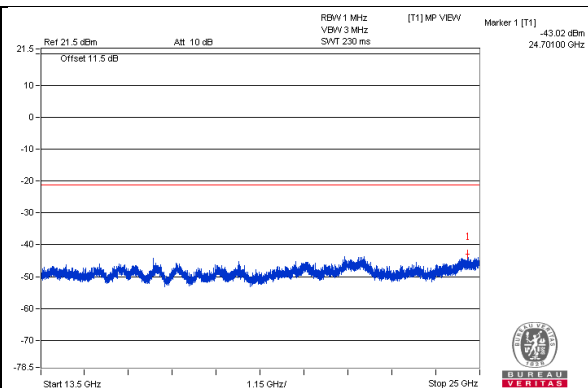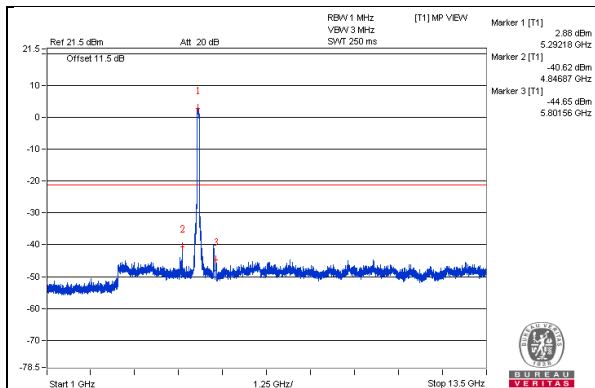


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5360.62 PK	72.6	74	-1.4	-29.46	6.8	-22.66
2	5352.2 AV	53.44	54	-0.56	-48.62	6.8	-41.82

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

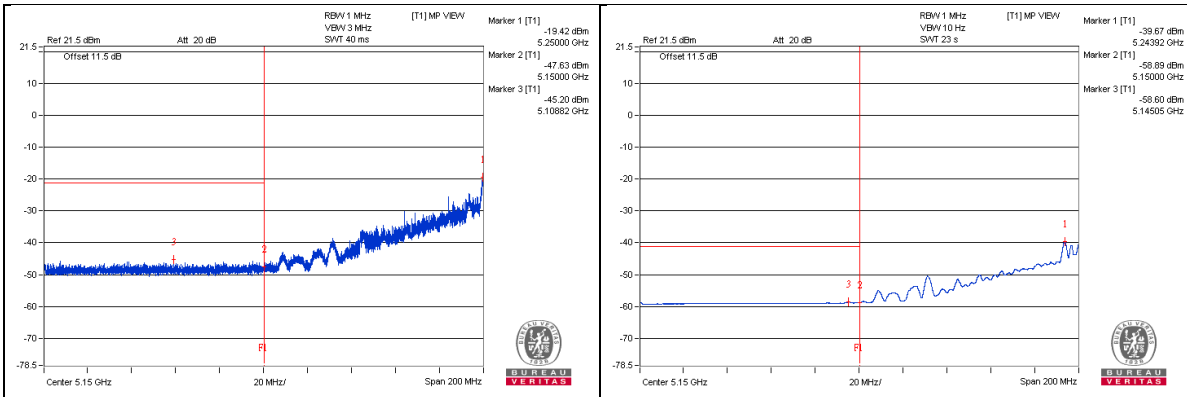







802.11ac (VHT80) - Channel 106
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3692.18 PK	55.5	74	-18.5	-46.56	6.8	-39.76
2	3685.93 AV	35.56	54	-18.44	-66.5	6.8	-59.7
3	7376.56 PK	55.82	74	-18.18	-46.24	6.8	-39.44
4	7373.43 AV	36.87	54	-17.13	-65.19	6.8	-58.39
5	11057.81 PK	52.8	74	-21.2	-49.26	6.8	-42.46
6	11068.75 AV	32.73	54	-21.27	-69.33	6.8	-62.53
7	16597.81 PK	55.24	68.2	-12.96	-46.82	6.8	-40.02

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

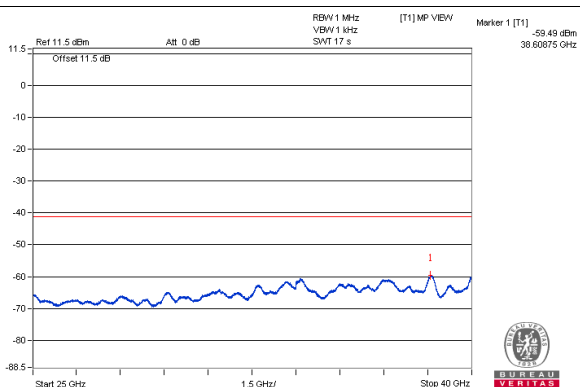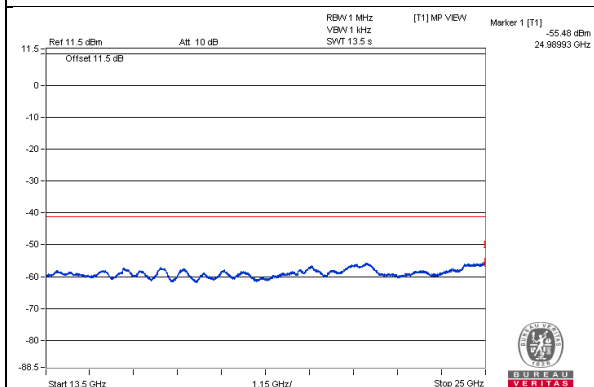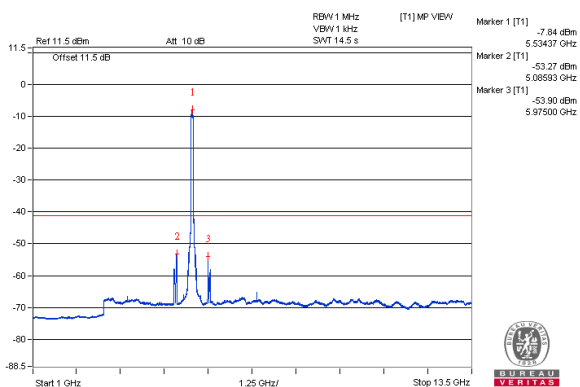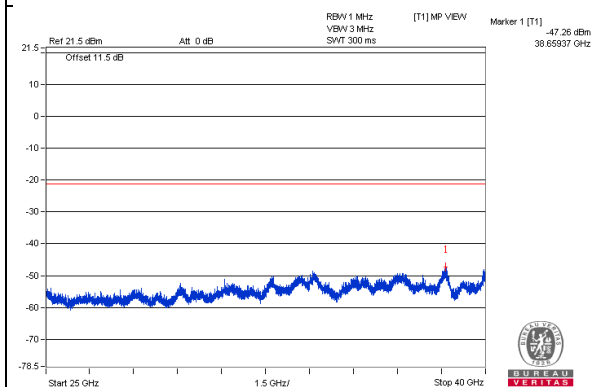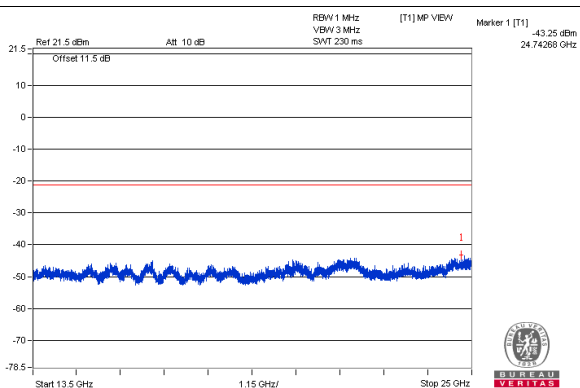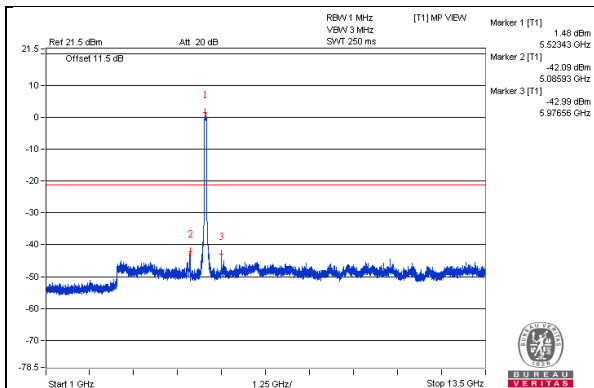


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5468.18 PK	69	74	-5	-33.06	6.8	-26.26
2	5470 AV	53.67	54	-0.33	-48.39	6.8	-41.59

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

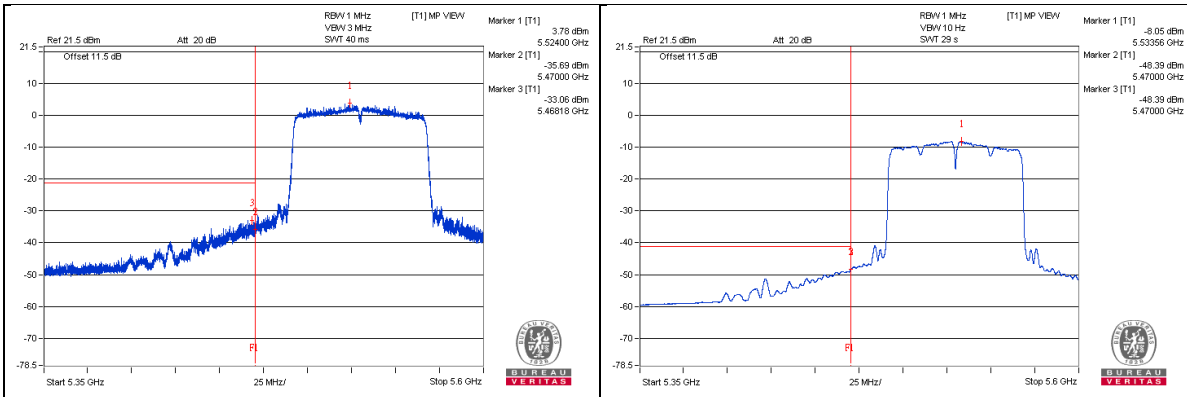

802.11ac (VHT80) - Channel 122







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3746.87 PK	55.39	74	-18.61	-46.67	6.8	-39.87
2	3739.06 AV	34.8	54	-19.2	-67.26	6.8	-60.46
3	7479.68 PK	54.81	74	-19.19	-47.25	6.8	-40.45
4	7479.68 AV	37.71	54	-16.29	-64.35	6.8	-57.55
5	11217.18 PK	54.38	74	-19.62	-47.68	6.8	-40.88
6	11229.68 AV	36.46	54	-17.54	-65.6	6.8	-58.8
7	16826.37 PK	58.65	68.2	-9.55	-43.41	6.8	-36.61

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

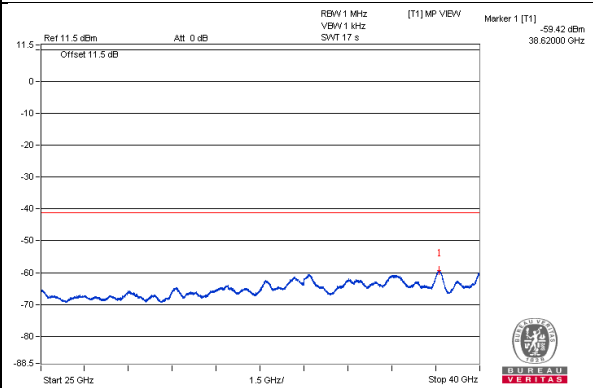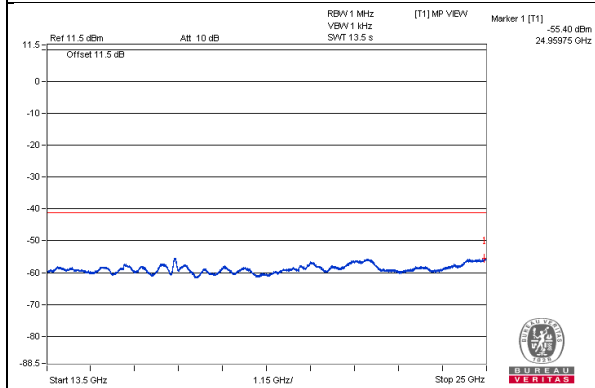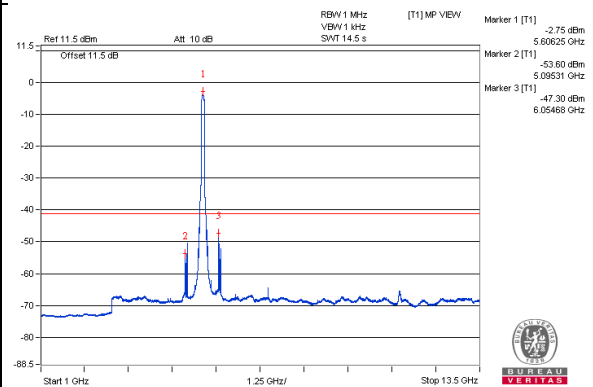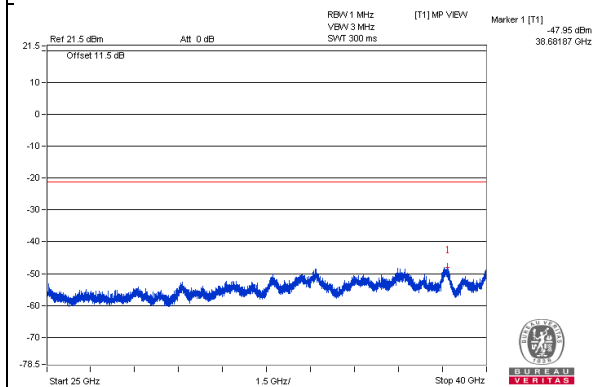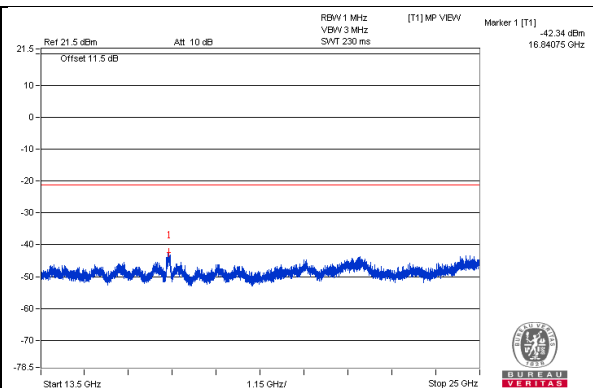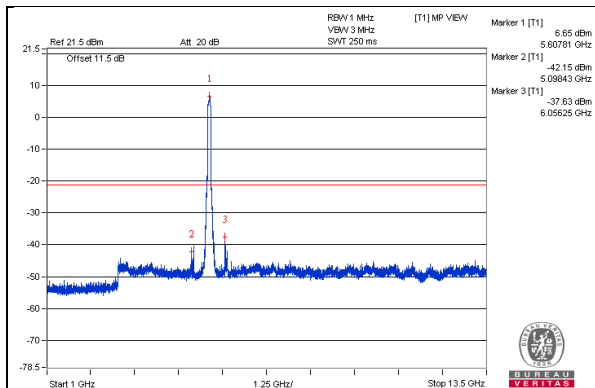


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5725.17 PK	68.32	74	-5.68	-33.74	6.8	-26.94
2	5725.02 AV	52.37	54	-1.63	-49.69	6.8	-42.89

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






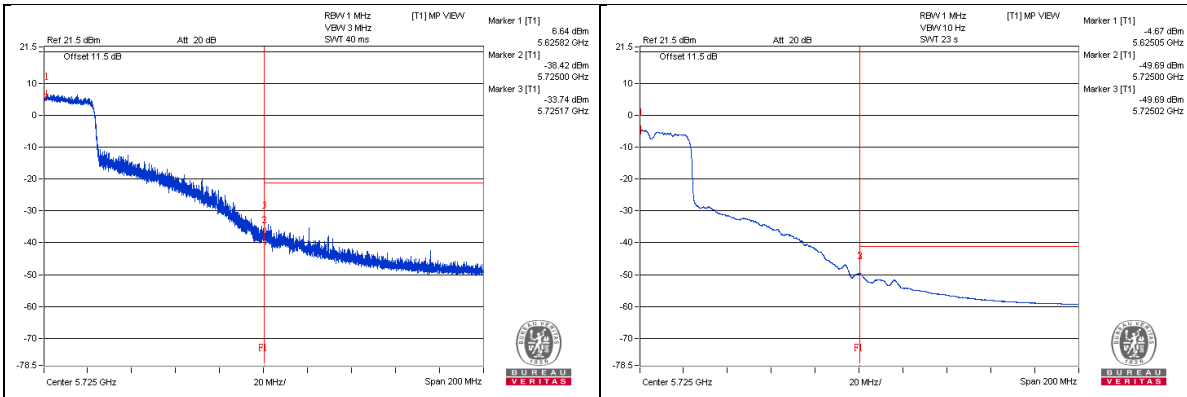


802.11ac (VHT80) – Channel 138
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.56 PK	57.02	74	-16.98	-45.04	6.8	-38.24
2	3792.18 AV	34.9	54	-19.1	-67.16	6.8	-60.36
3	7587.5 PK	55.19	74	-18.81	-46.87	6.8	-40.07
4	7587.5 AV	35.63	54	-18.37	-66.43	6.8	-59.63
5	11385.93 PK	55.57	74	-18.43	-46.49	6.8	-39.69
6	11387.5 AV	36.68	54	-17.32	-65.38	6.8	-58.58
7	17073.62 PK	59.49	68.2	-8.71	-42.57	6.8	-35.77

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

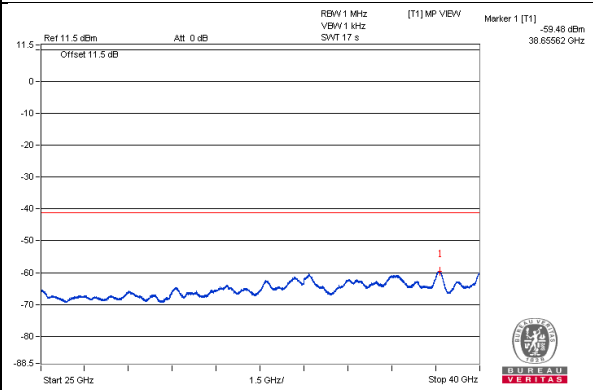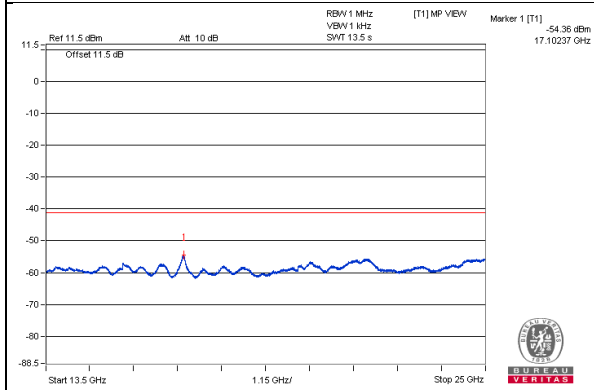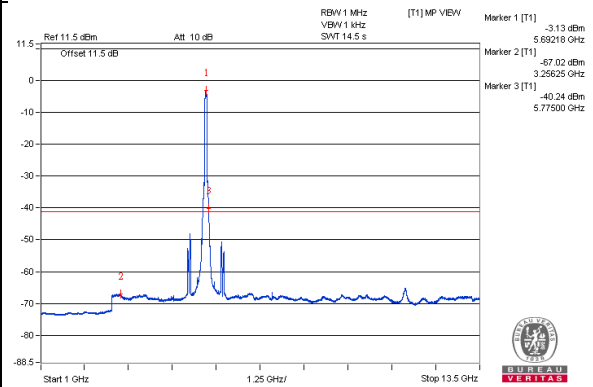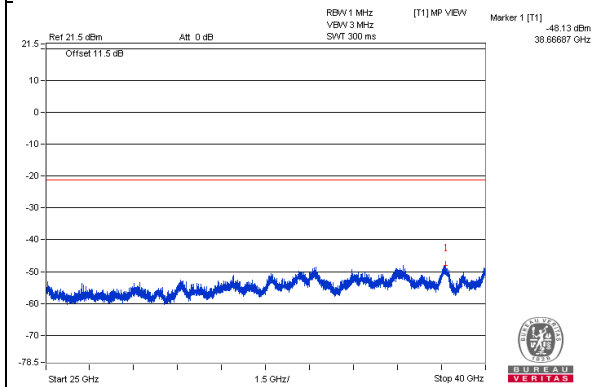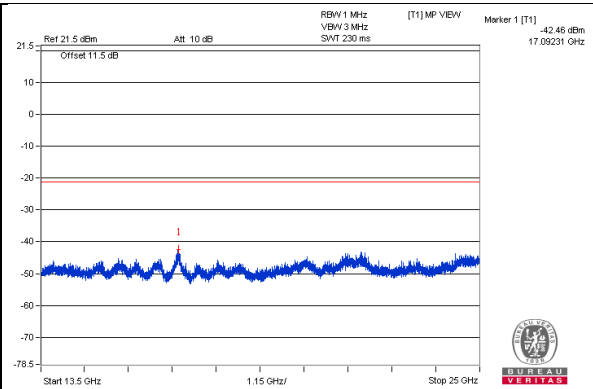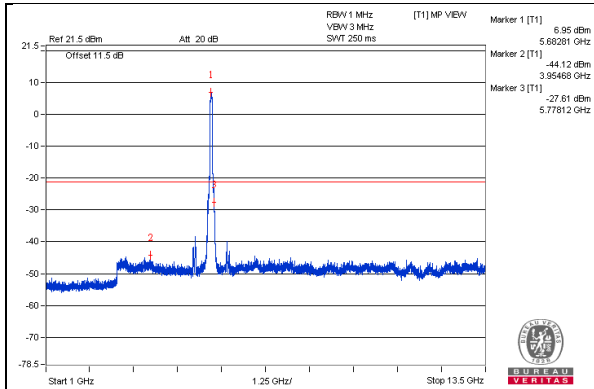


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5852.31 PK	68.8	74	-5.2	-33.26	6.8	-26.46
2	5850.06 AV	51.77	54	-2.23	-50.29	6.8	-43.49

Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.






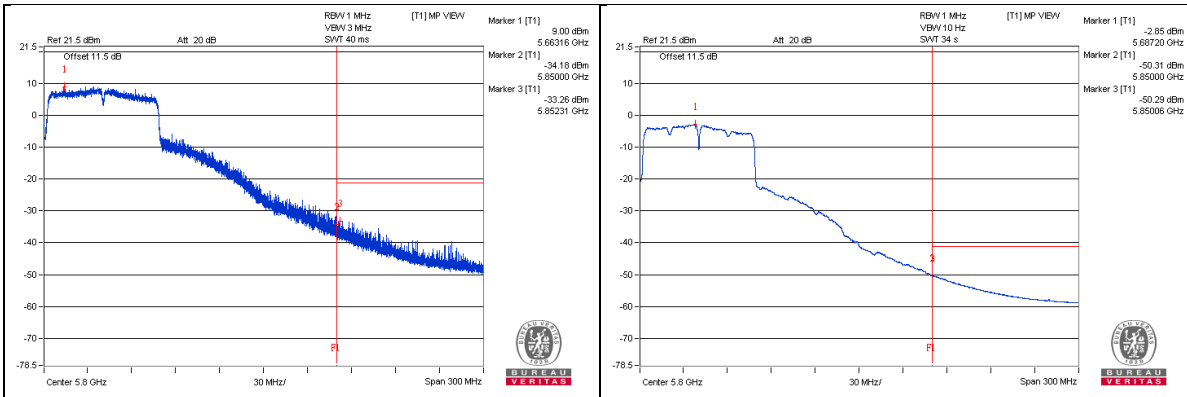


802.11ac (VHT80) – Channel 155
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3851.56 PK	55.48	74	-18.52	-46.58	6.8	-39.78
2	3850 AV	35.11	54	-18.89	-66.95	6.8	-60.15
3	7700 PK	55.11	74	-18.89	-46.95	6.8	-40.15
4	7700 AV	36.65	54	-17.35	-65.41	6.8	-58.61
5	11542.18 PK	54.26	74	-19.74	-47.8	6.8	-41
6	11545.31 AV	33.59	54	-20.41	-68.47	6.8	-61.67
7	17325.18 PK	57.16	68.2	-11.04	-44.9	6.8	-38.1

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

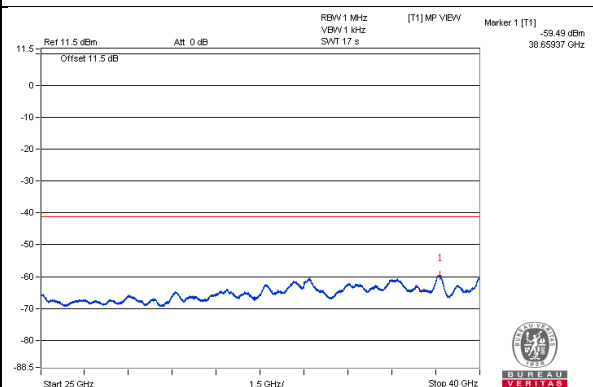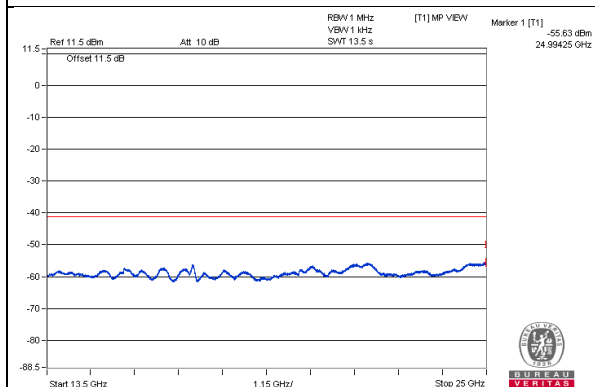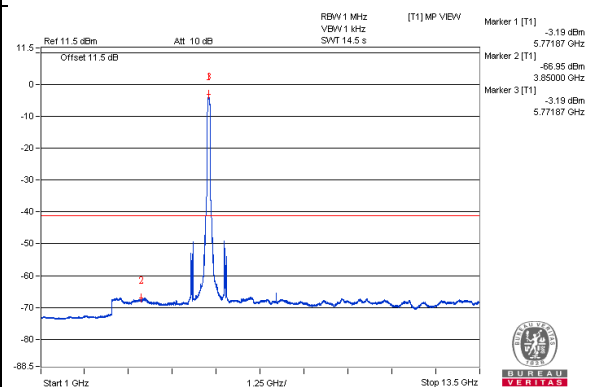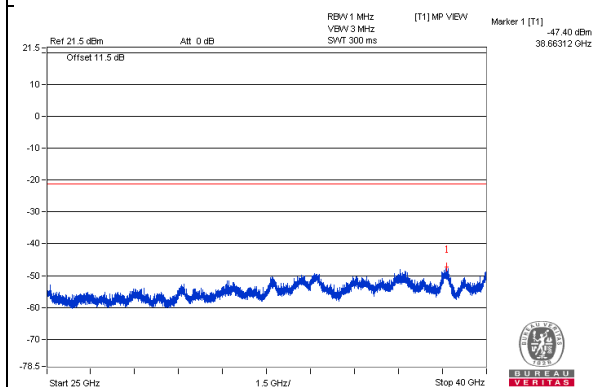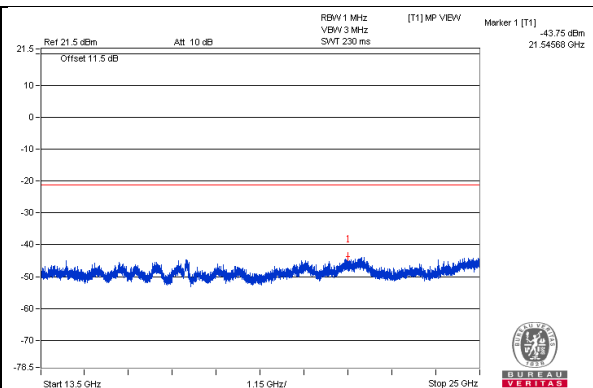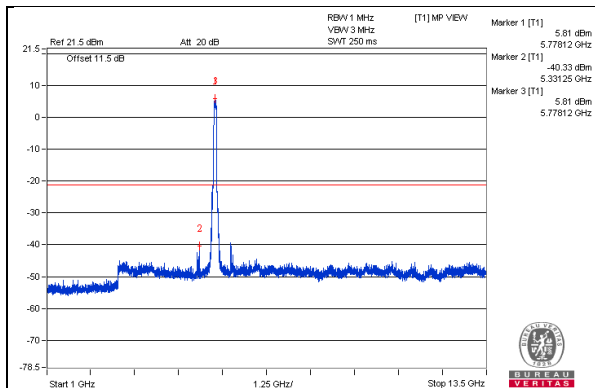

Bandedge table

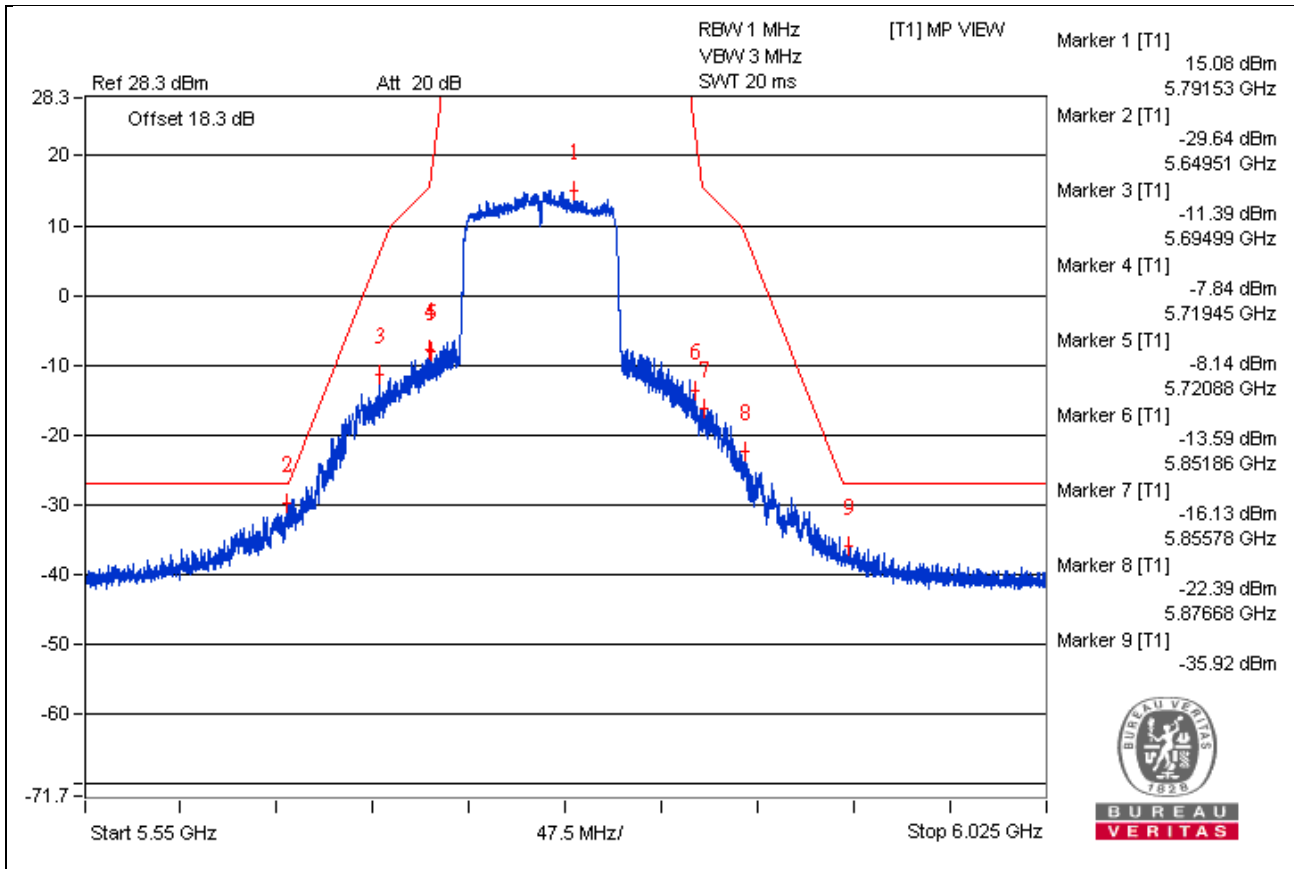

2TX Mode

802.11ac (VHT20) - Channel 36

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3456.25 PK	57.37	74	-16.63	-47.46	-47.96	6.8	-37.89
2	3453.12 AV	37.38	54	-16.62	-68.08	-67.34	6.8	-57.88
3	6914.06 PK	59.41	74	-14.59	-45.57	-45.75	6.8	-35.85
4	6906.25 AV	38.08	54	-15.92	-66.74	-67.26	6.8	-57.18
5	10367.18 PK	57.88	74	-16.12	-47.75	-46.7	6.8	-37.38
6	10360.93 AV	39.38	54	-14.62	-66.68	-64.88	6.8	-55.88
7	15545.56 PK	67.68	74	-6.32	-35.17	-42.19	6.8	-27.58
8	15536.93 AV	54.94	54	* 0.94	-48.82	-52.02	6.8	-40.32


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

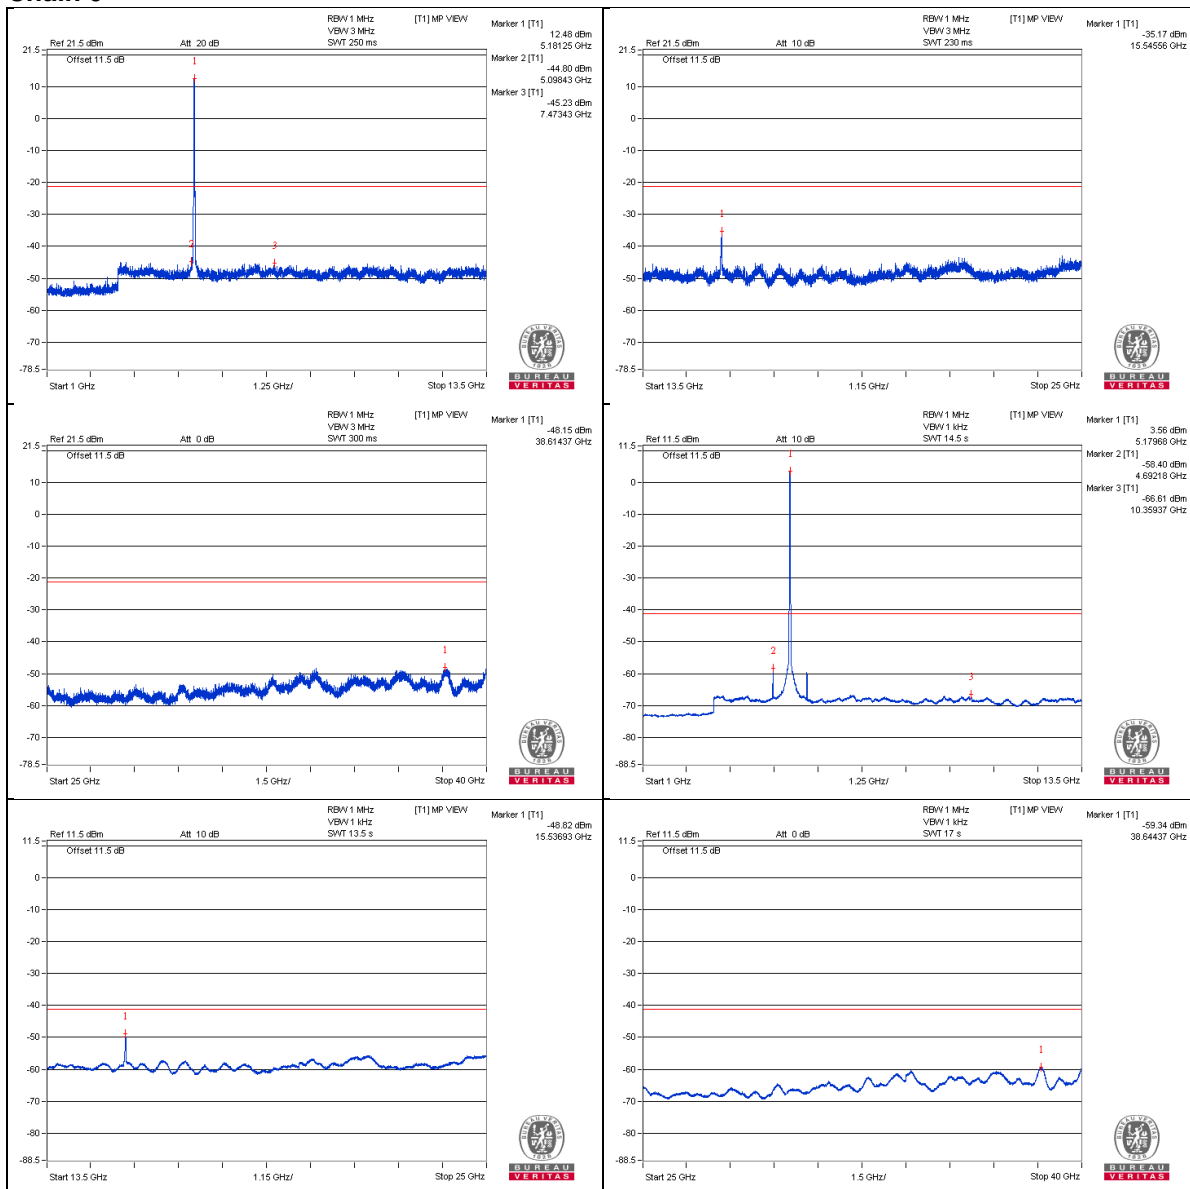

Chain 1

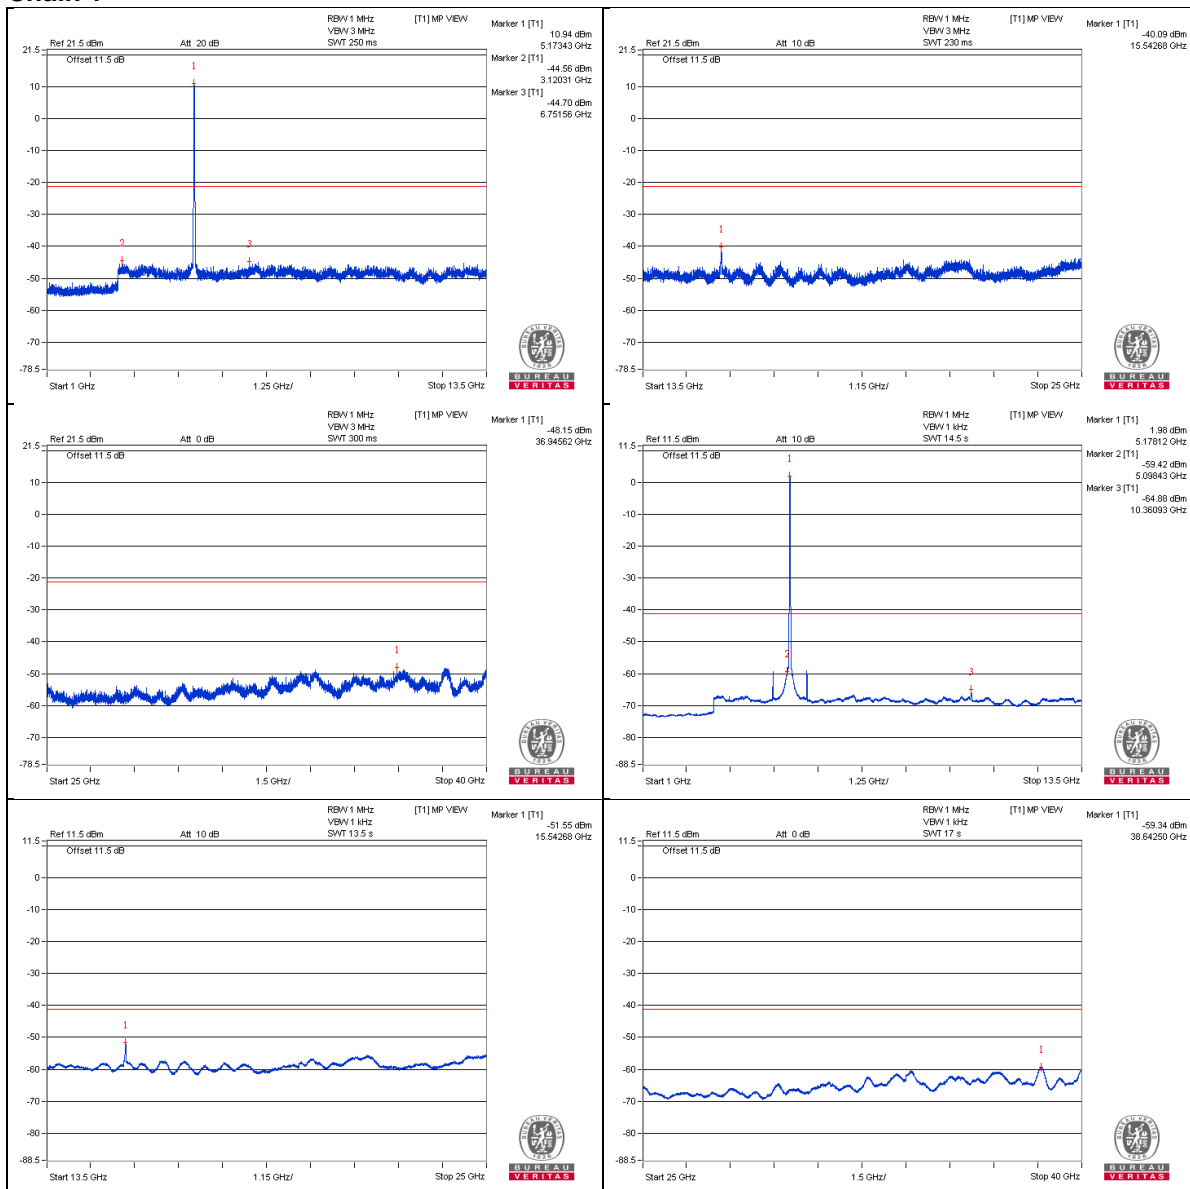

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5149.42 PK	69.33	74	-4.67	-33.99	-38.73	6.8	-25.93
2	5150 AV	53.68	54	-0.32	-51.04	-51.77	6.8	-41.58

Note :



$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain 0

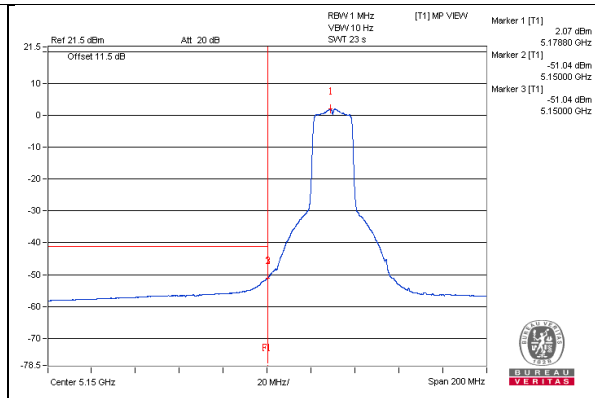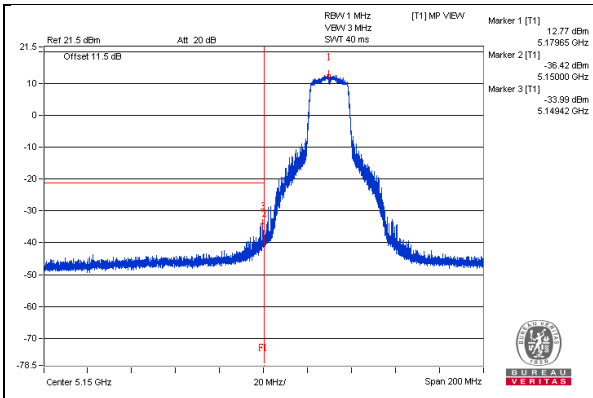

Chain 1

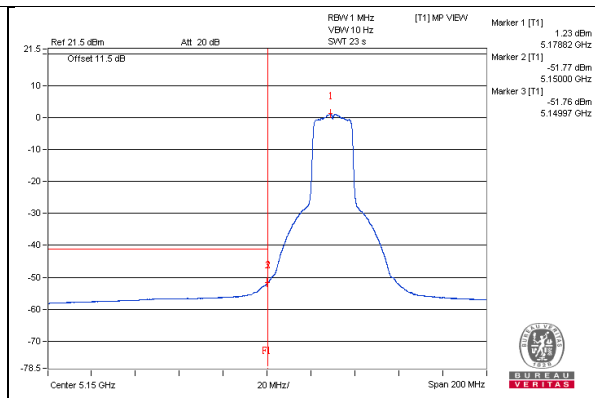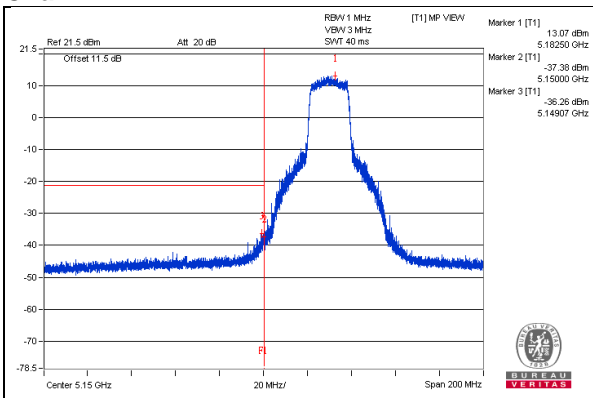

802.11ac (VHT20) - Channel 40
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3462.5 PK	57.55	74	-16.45	-46.97	-48.14	6.8	-37.71
2	3465.62 AV	37.44	54	-16.56	-68.2	-67.12	6.8	-57.82
3	6926.56 PK	59.47	74	-14.53	-46.98	-44.55	6.8	-35.79
4	6932.81 AV	38.99	54	-15.01	-65.27	-67.07	6.8	-56.27
5	10393.75 PK	57.83	74	-16.17	-47.94	-46.63	6.8	-37.43
6	10400 AV	40.51	54	-13.49	-66.49	-63.23	6.8	-54.75
7	15597.31 PK	68.78	74	-5.22	-34.09	-40.99	6.8	-26.48
8	15597.31 AV	57.69	54	* 3.69	-45.96	-49.52	6.8	-37.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

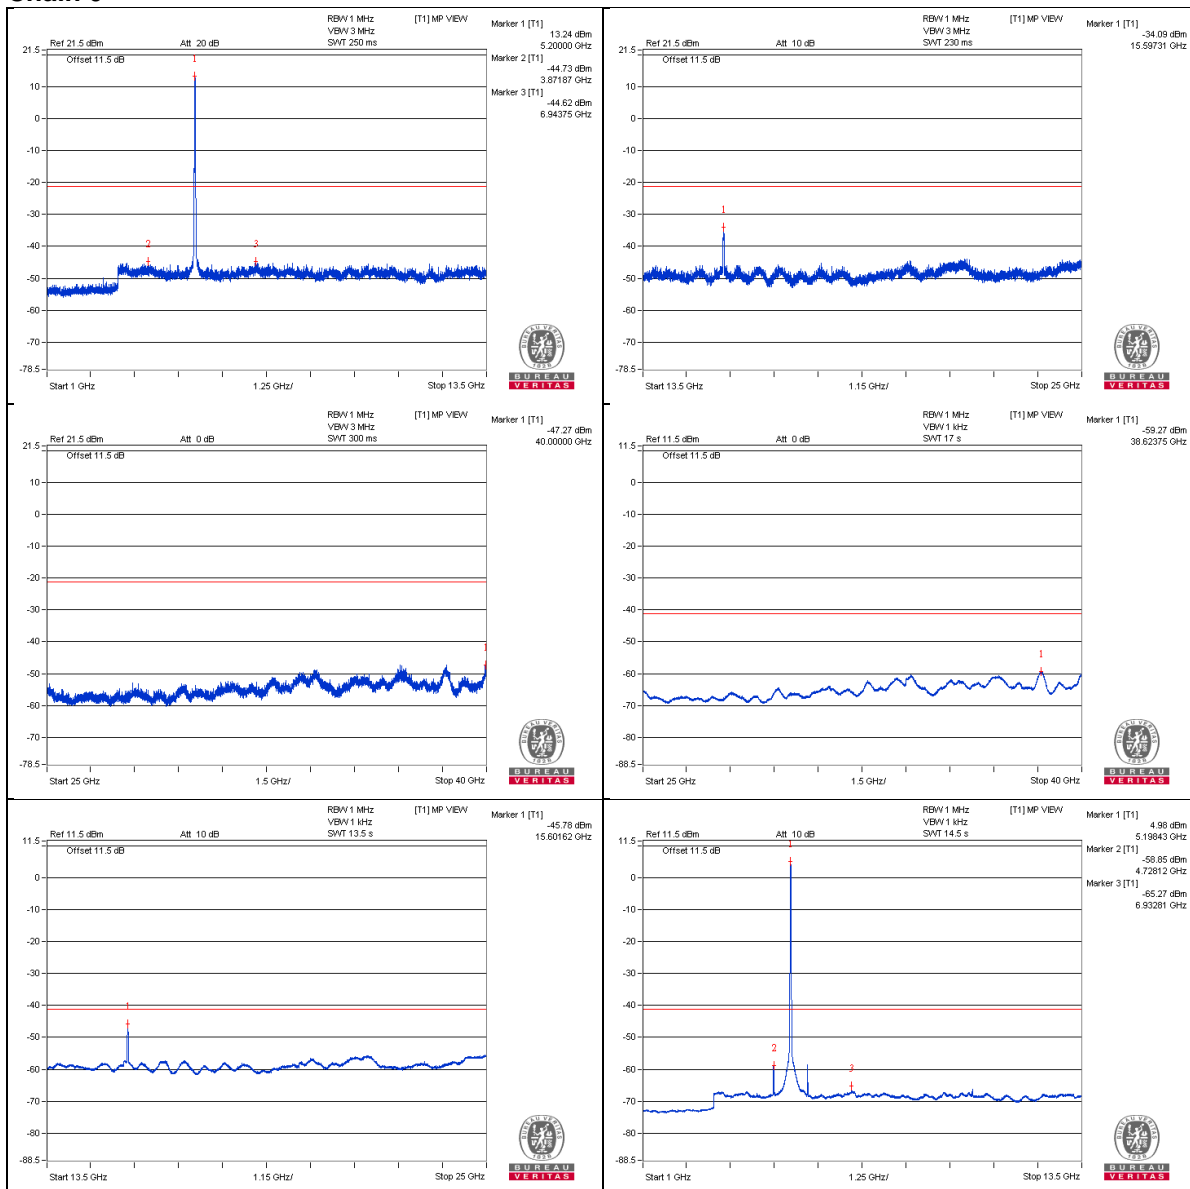

Chain 1

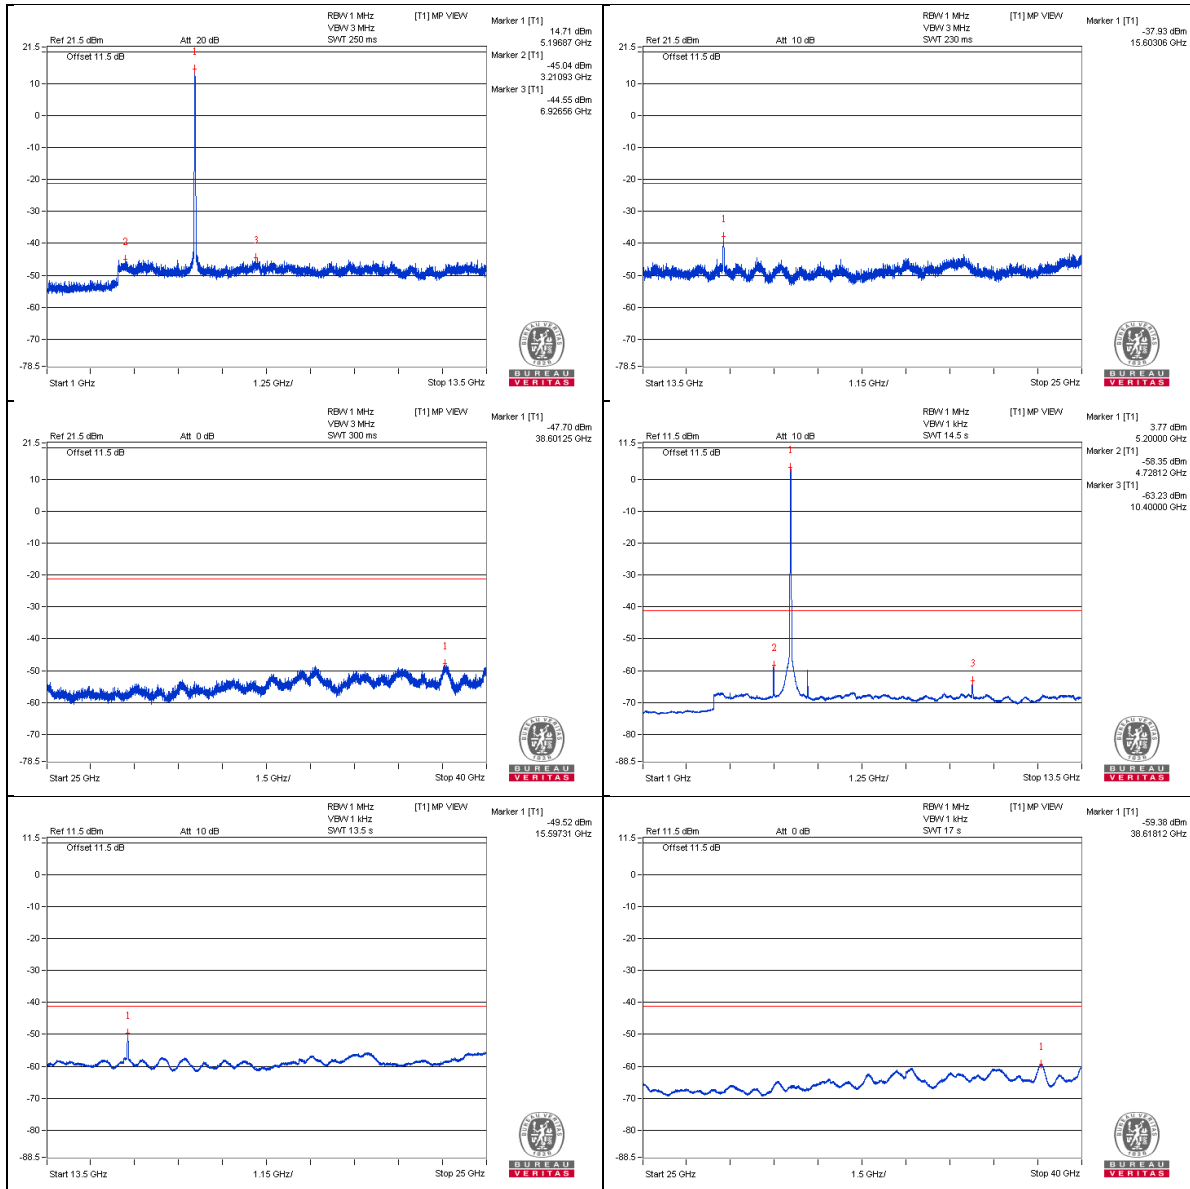

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5147.52 PK	62.54	74	-11.46	-43.78	-41.56	6.8	-32.72
2	5150 AV	49.67	54	-4.33	-55.16	-55.65	6.8	-45.59

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

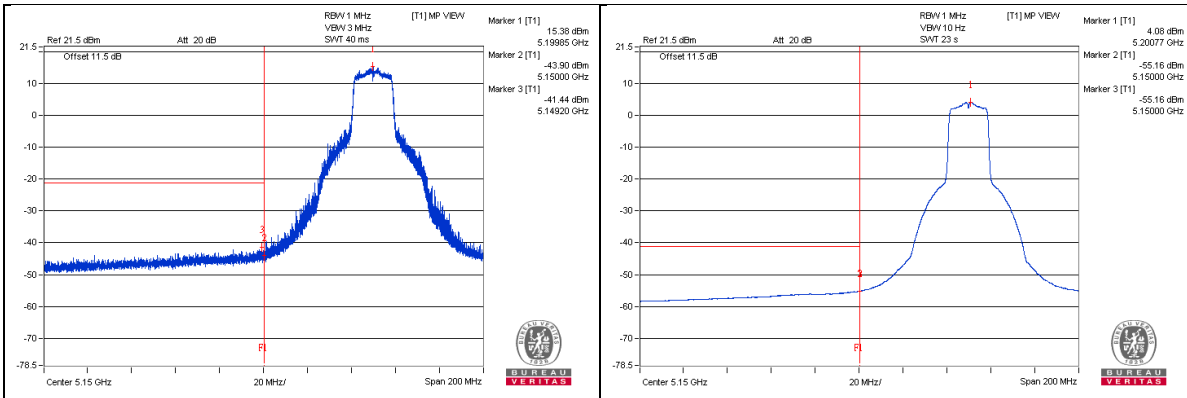

Chain 1

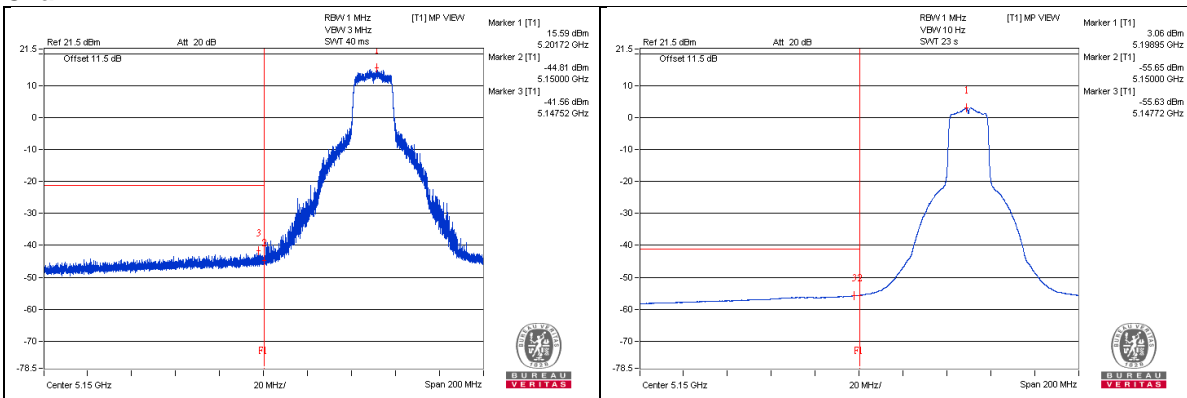

802.11ac (VHT20) - Channel 48
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3496.87 PK	57.06	74	-16.94	-47.31	-48.85	6.8	-38.2
2	3492.18 AV	37.1	54	-16.9	-68.47	-67.52	6.8	-58.16
3	6993.75 PK	59.33	74	-14.67	-46.32	-45.23	6.8	-35.93
4	6985.93 AV	39.79	54	-14.21	-64.04	-67.03	6.8	-55.47
5	10481.25 PK	58.16	74	-15.84	-48.43	-45.78	6.8	-37.1
6	10479.68 AV	41.34	54	-12.66	-66.18	-62.18	6.8	-53.92
7	15719.5 PK	68.16	74	-5.84	-36.82	-37.01	6.8	-27.1
8	15719.5 AV	55.85	54	* 1.85	-48.99	-49.46	6.8	-39.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

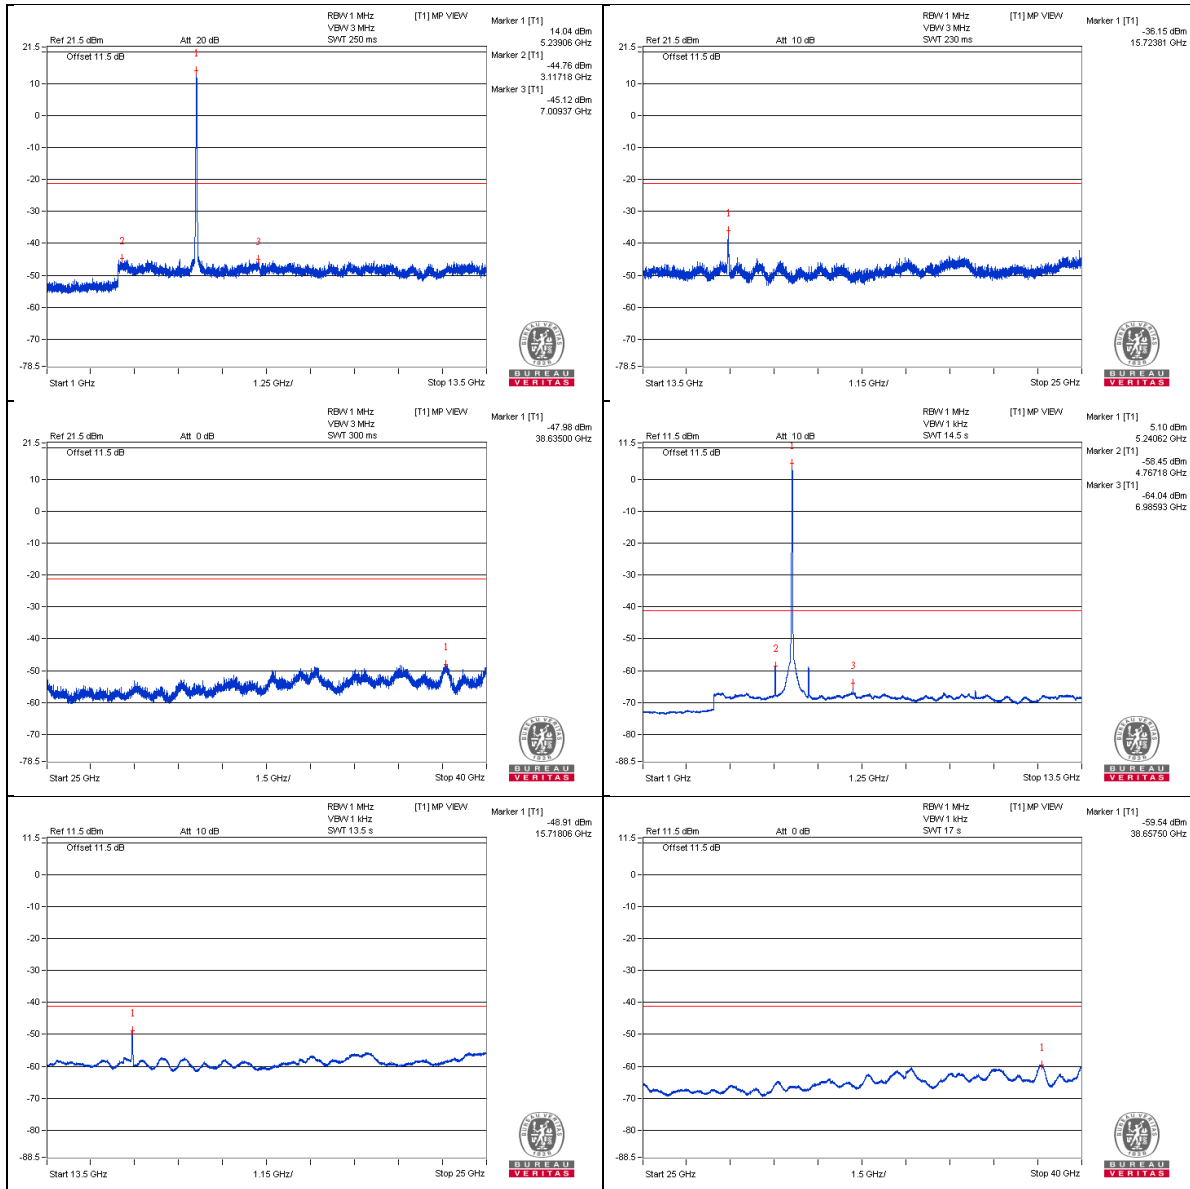

Chain 1

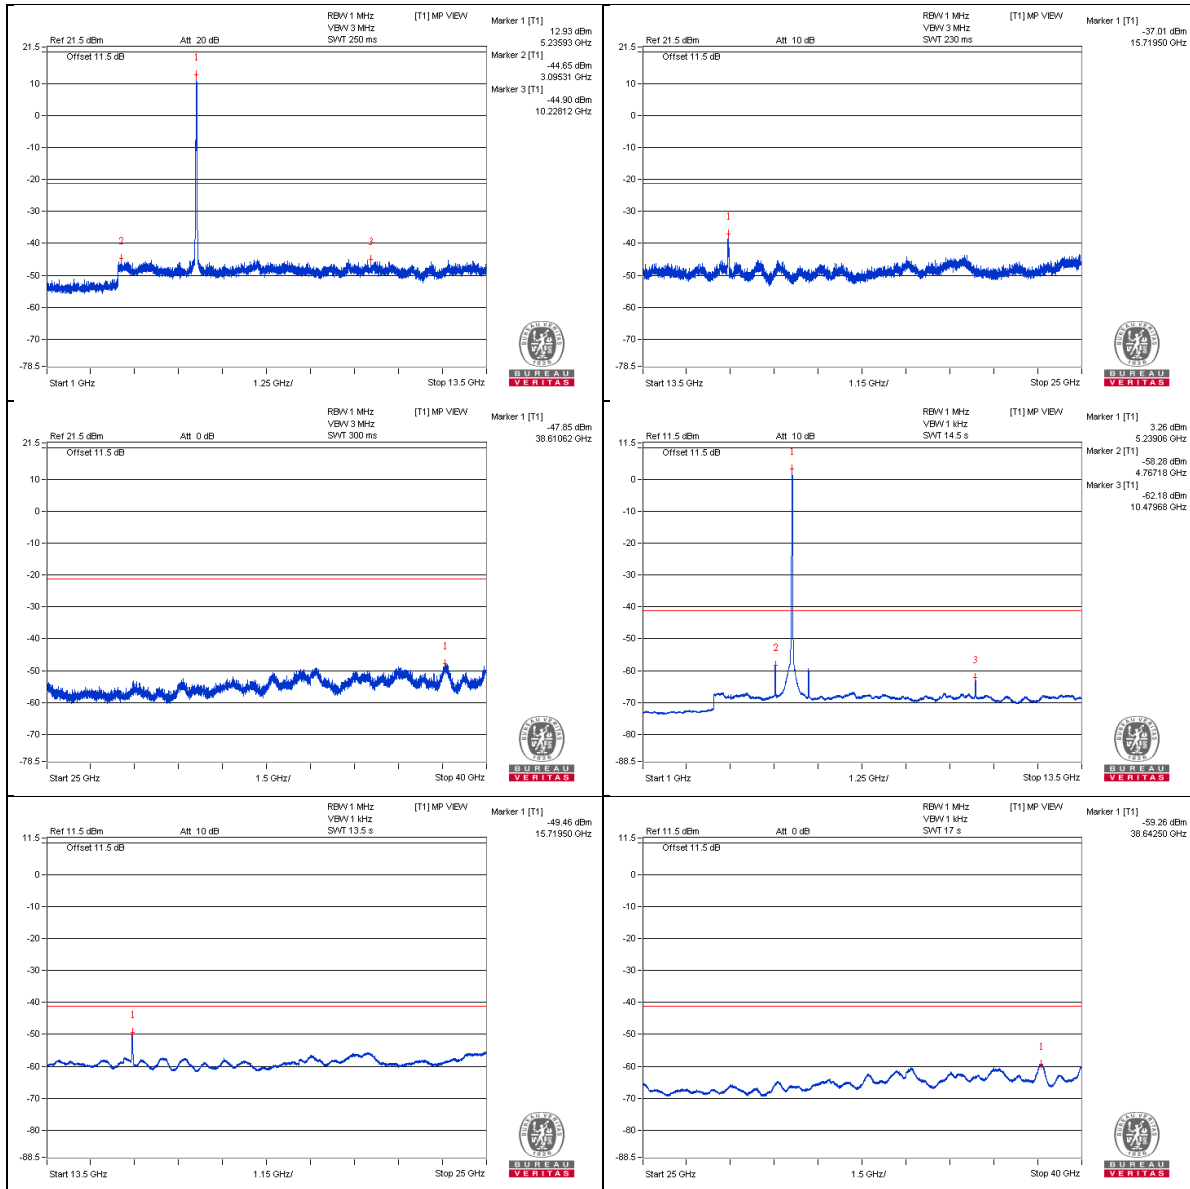

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5146.75 PK	60.46	74	-13.54	-44.12	-45.16	6.8	-34.8
2	5150 AV	47.92	54	-6.08	-57.1	-57.2	6.8	-47.34

Note :



$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain 0

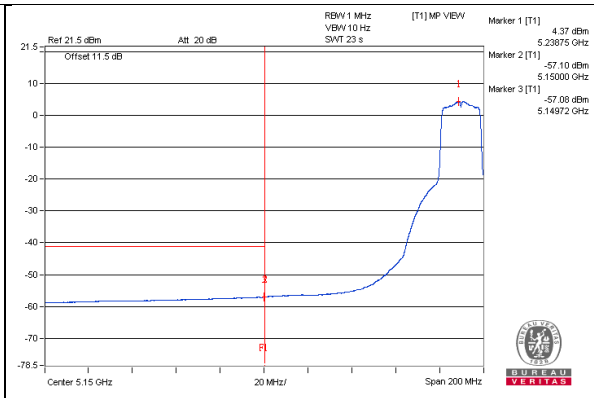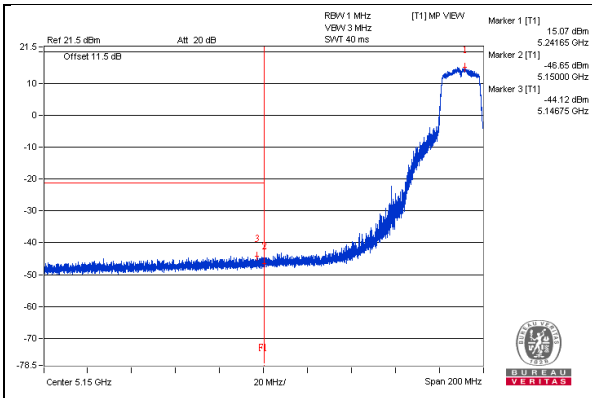

Chain 1

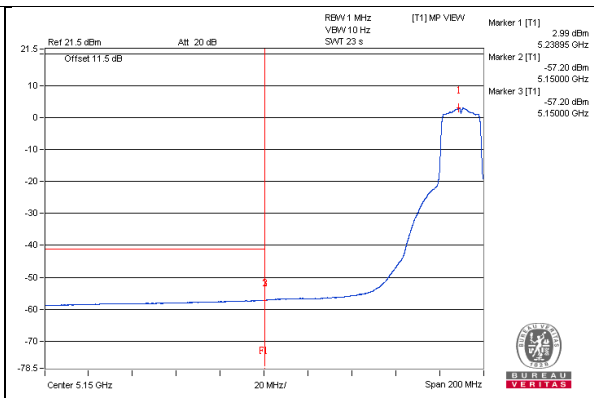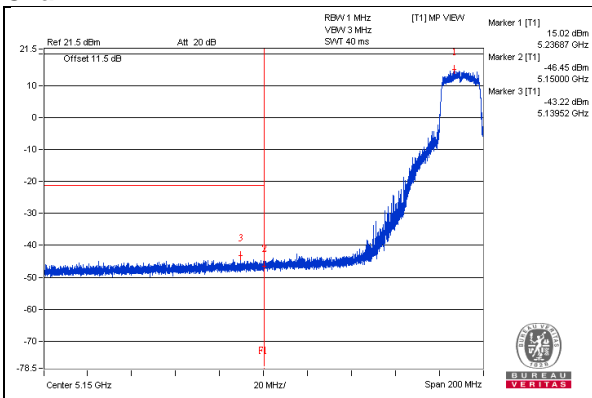

802.11ac (VHT20) - Channel 52
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3509.37 PK	57.38	74	-16.62	-47.57	-47.81	6.8	-37.88
2	3506.25 AV	37.5	54	-16.5	-68.18	-67.04	6.8	-57.76
3	7009.37 PK	59.22	74	-14.78	-46.86	-45.03	6.8	-36.04
4	7012.5 AV	39.79	54	-14.21	-64.13	-66.85	6.8	-55.47
5	10518.75 PK	58.31	74	-15.69	-47.14	-46.41	6.8	-36.95
6	10518.75 AV	41.57	54	-12.43	-65.73	-62.03	6.8	-53.69
7	15779.87 PK	67.23	74	-6.77	-38.5	-37.26	6.8	-28.03
8	15779.87 AV	55.14	54	* 1.14	-50.28	-49.6	6.8	-40.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

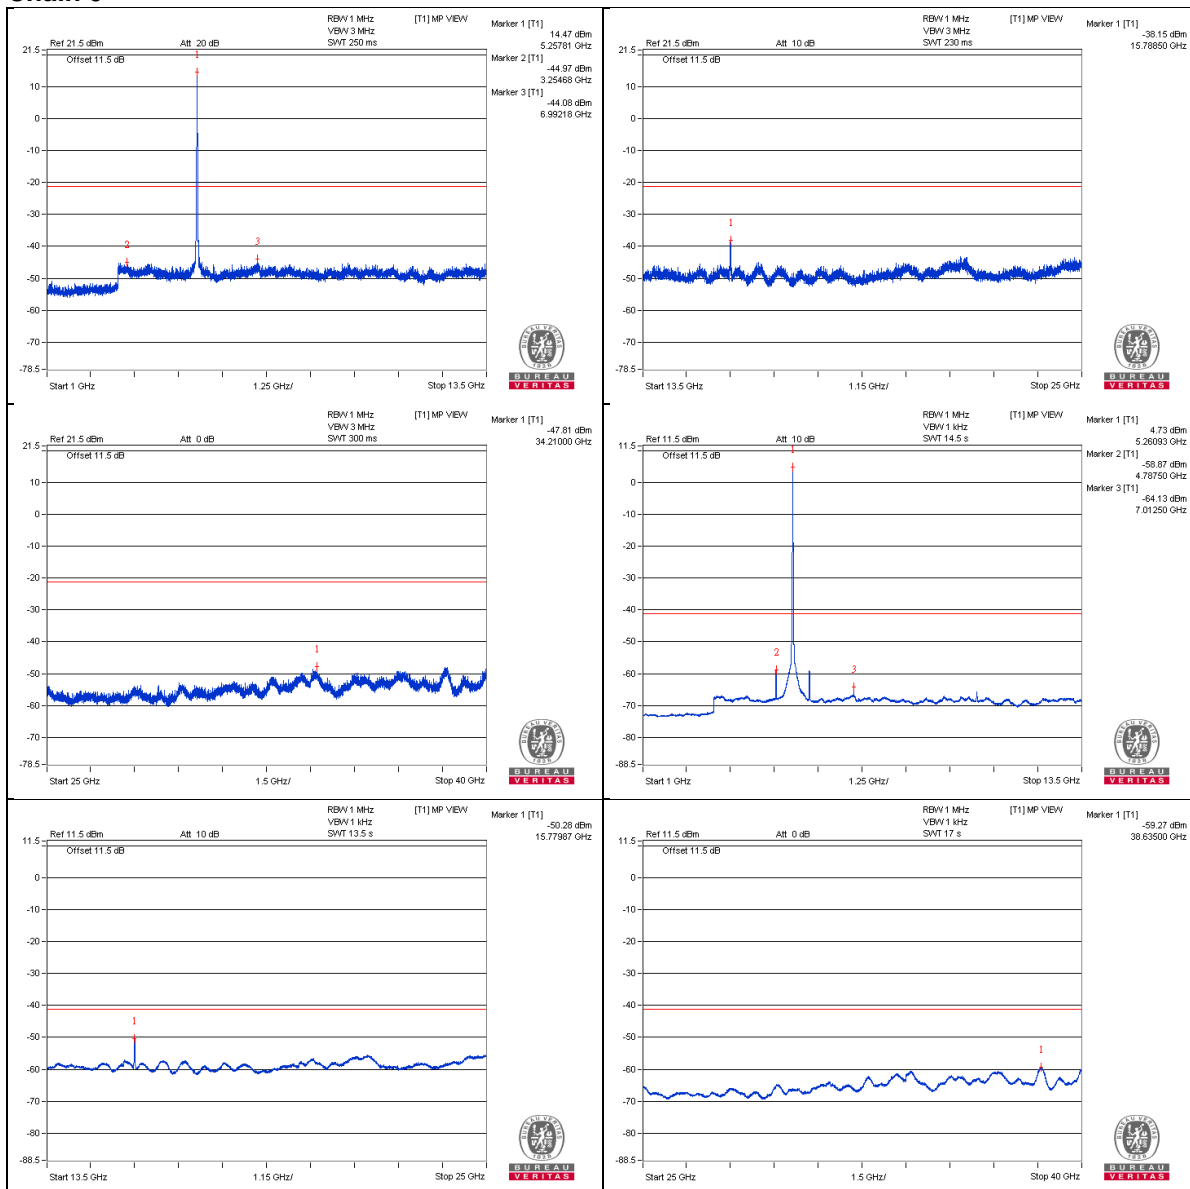

Chain 1

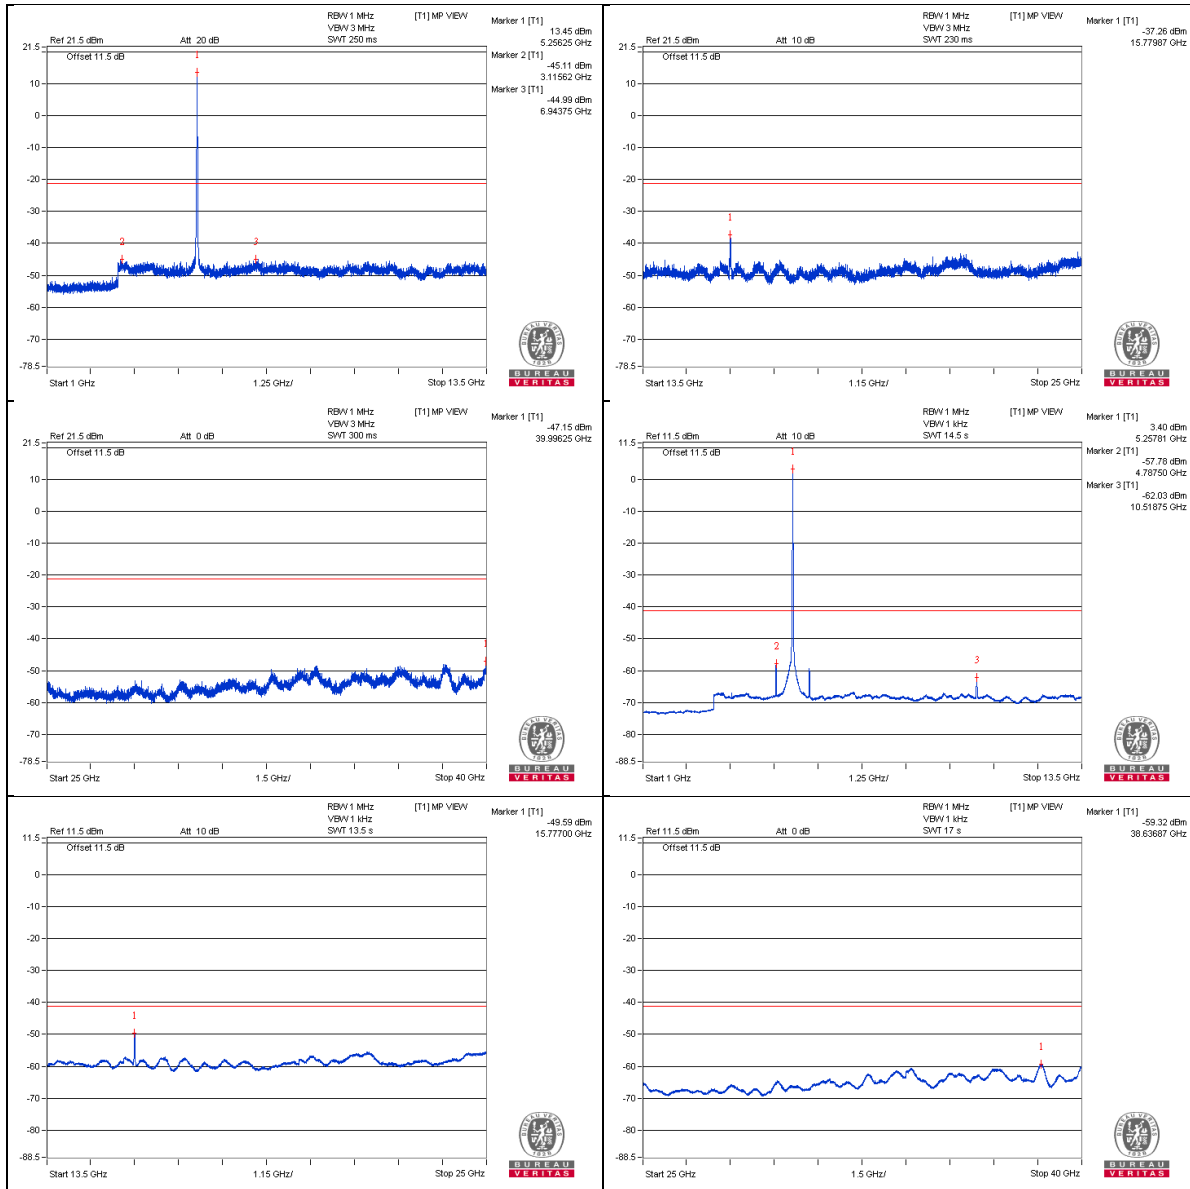

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5139.87 PK	59.64	74	-14.36	-45	-45.91	6.8	-35.62
2	5149.97 AV	47.56	54	-6.44	-57.55	-57.47	6.8	-47.7

Note :



$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain 0

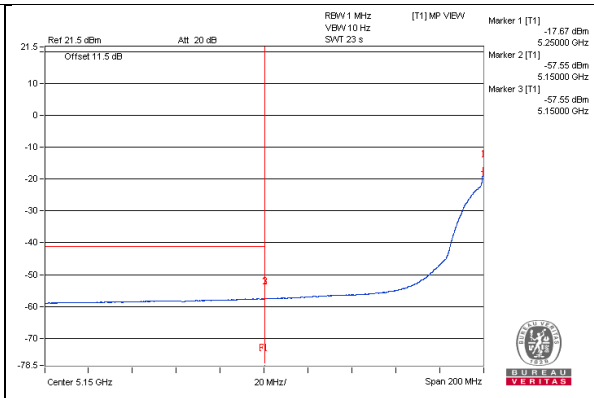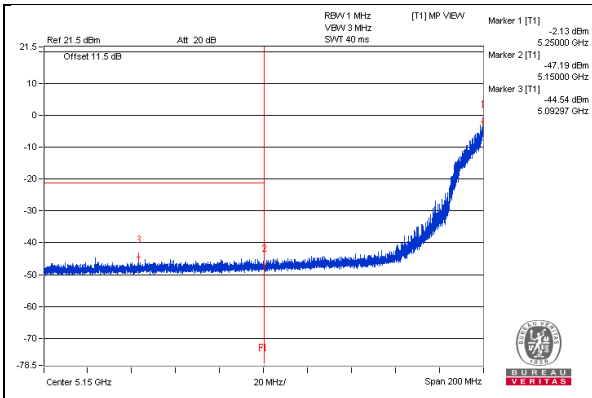

Chain 1

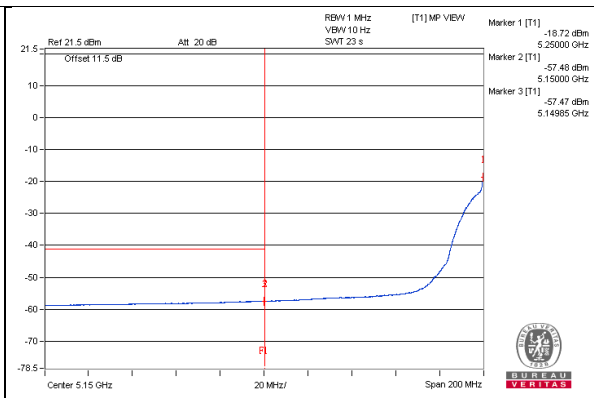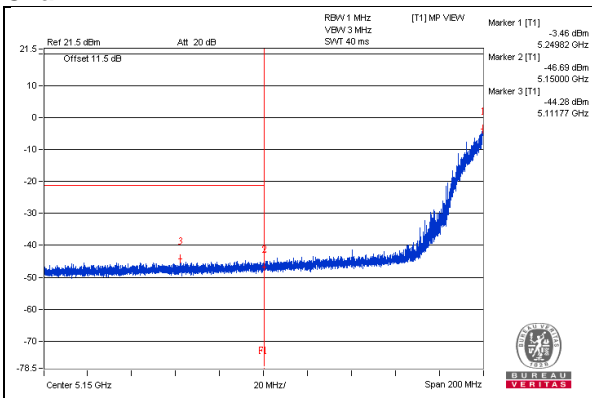

802.11ac (VHT20) - Channel 60
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3525 PK	57.74	74	-16.26	-47.42	-47.25	6.8	-37.52
2	3532.81 AV	37.5	54	-16.5	-67.97	-67.21	6.8	-57.76
3	7059.37 PK	57.27	74	-16.73	-47.14	-48.58	6.8	-37.99
4	7067.18 AV	38.17	54	-15.83	-65.81	-68.37	6.8	-57.09
5	10593.75 PK	58.65	74	-15.35	-46.81	-46.07	6.8	-36.61
6	10600 AV	43.56	54	-10.44	-62.13	-60.97	6.8	-51.7
7	15900.62 PK	70.66	74	-3.34	-35.6	-33.47	6.8	-24.6
8	15899.18 AV	58.23	54	* 4.23	-46.2	-47.59	6.8	-37.03

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

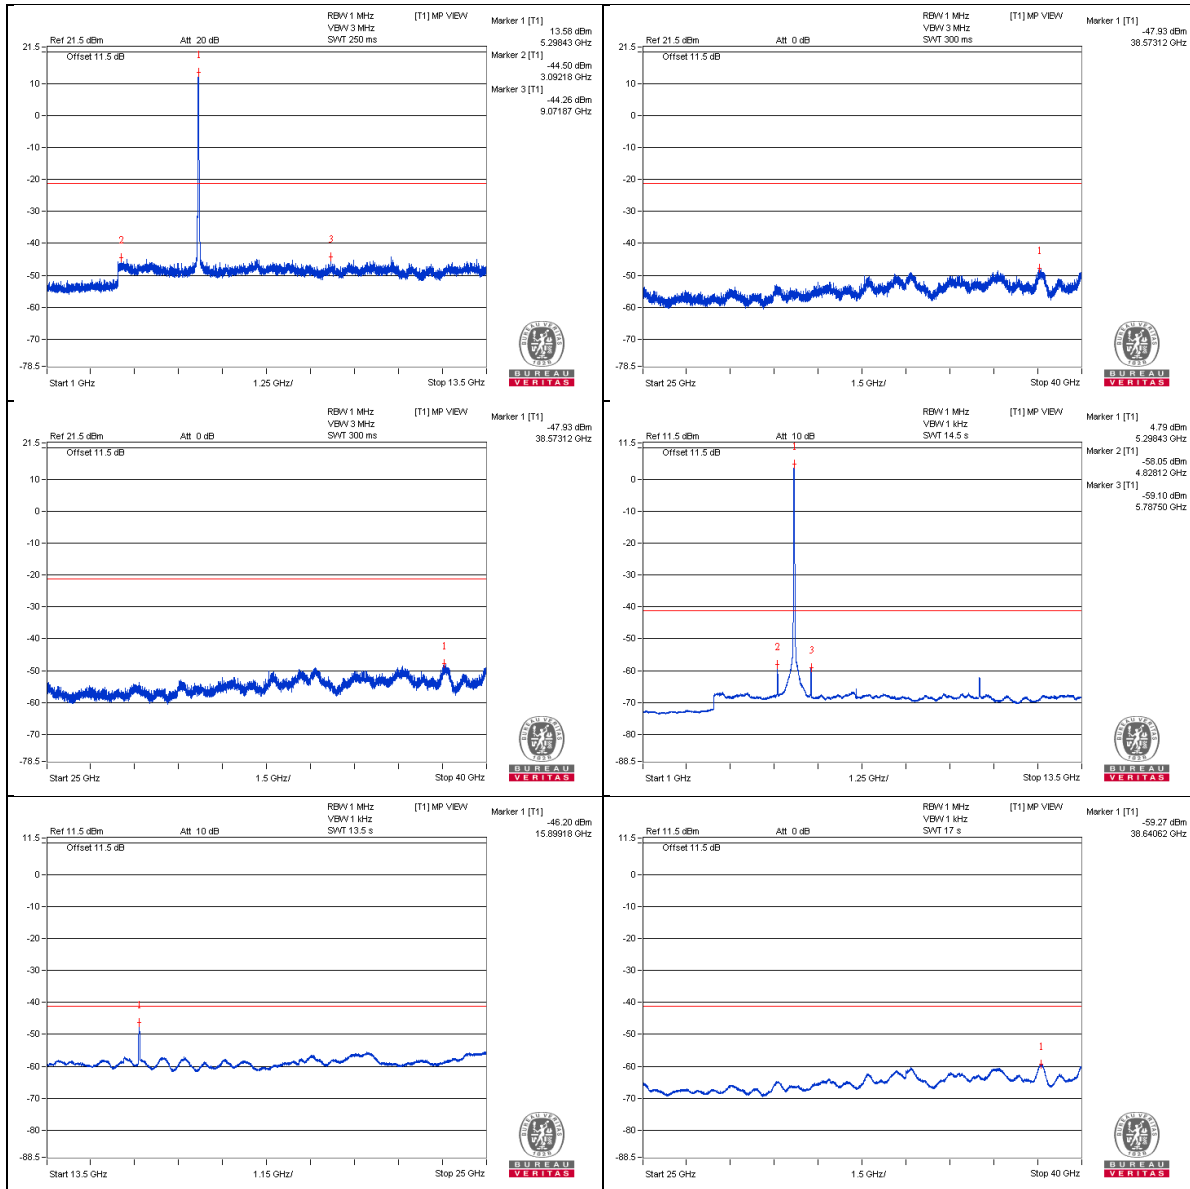

Chain 1

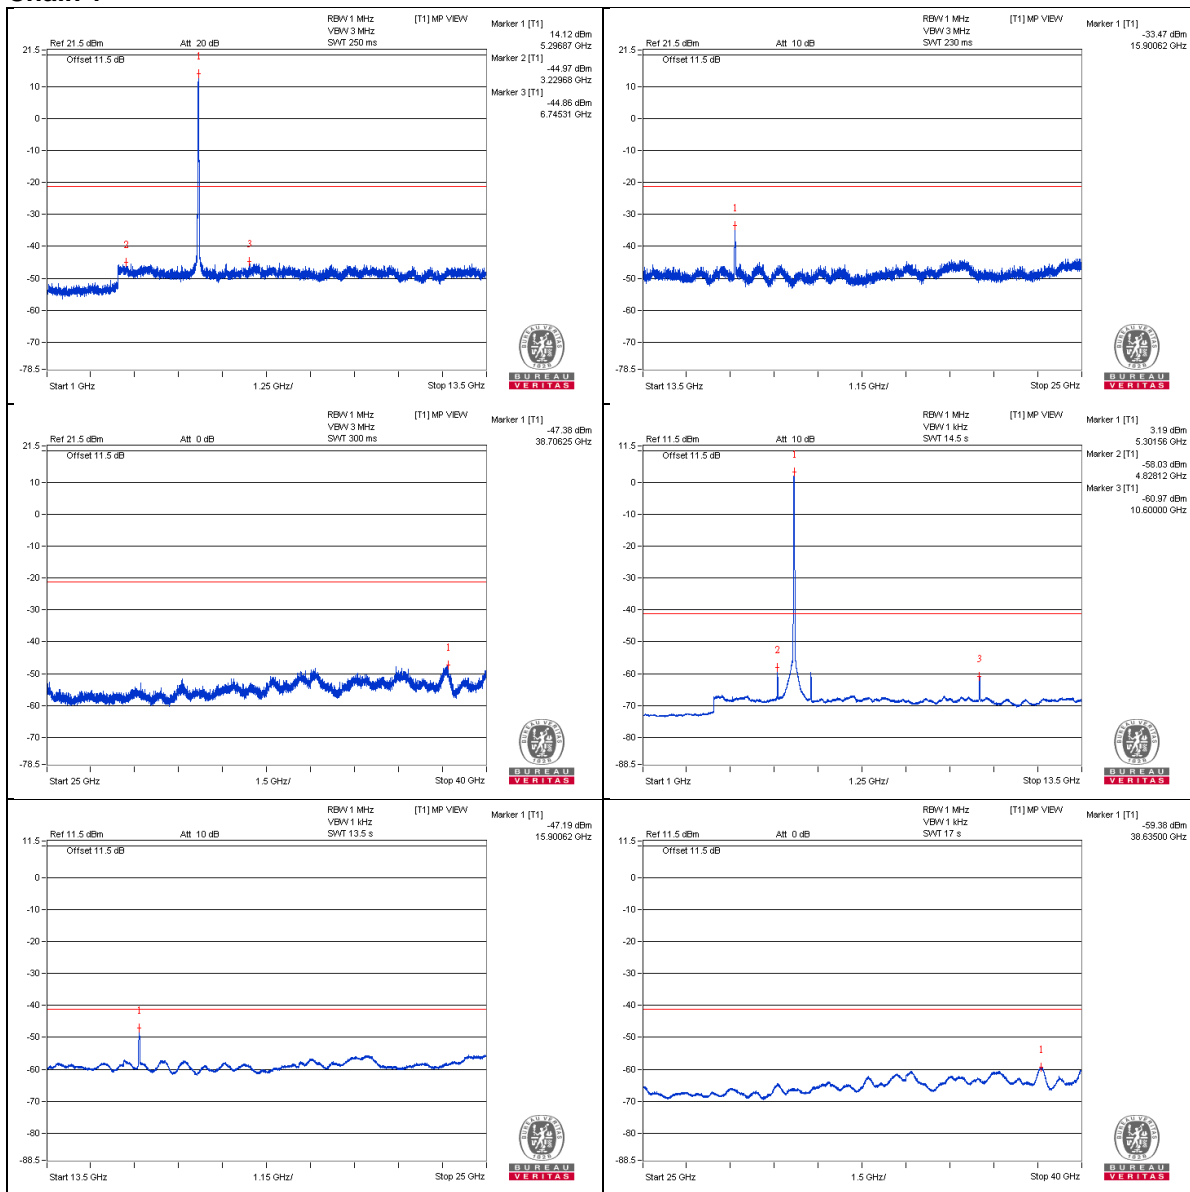

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5350.72 PK	64.59	74	-9.41	-38.31	-45	6.8	-30.67
2	5350 AV	49.9	54	-4.1	-54.94	-55.42	6.8	-45.36

Note :



$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain 0

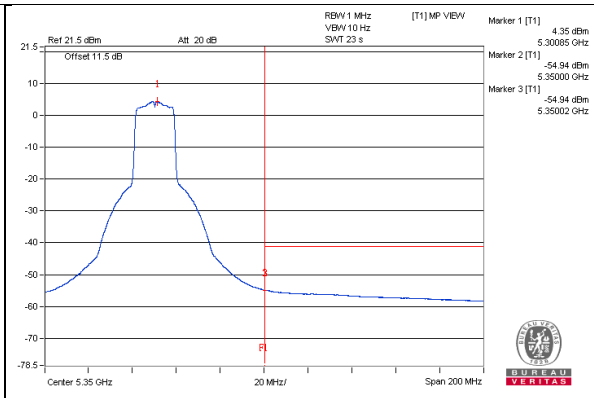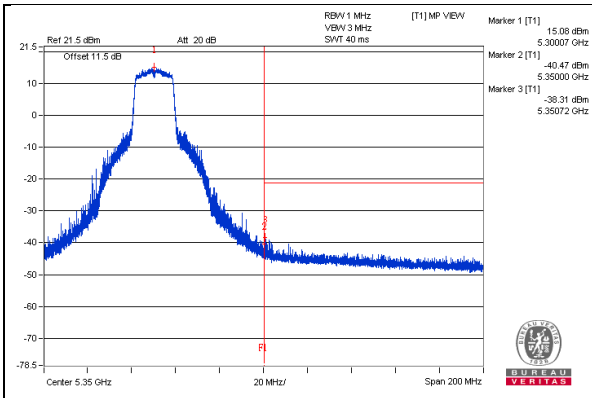

Chain 1

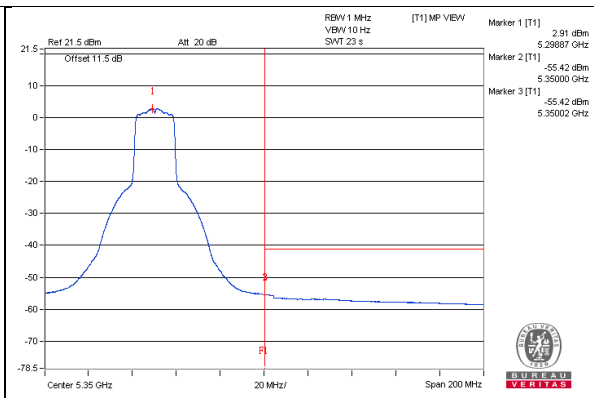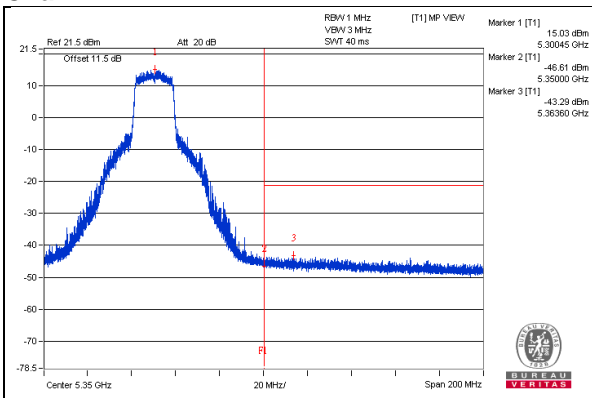

802.11ac (VHT20) - Channel 64
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3548.43 PK	57.57	74	-16.43	-47.3	-47.72	6.8	-37.69
2	3546.87 AV	37.51	54	-16.49	-68.01	-67.16	6.8	-57.75
3	7103.12 PK	57.71	74	-16.29	-48.01	-46.8	6.8	-37.55
4	7093.75 AV	37.55	54	-16.45	-66.68	-68.56	6.8	-57.71
5	10640.62 PK	59.1	74	-14.9	-46.87	-45.23	6.8	-36.16
6	10639.06 AV	42.53	54	-11.47	-63.64	-61.66	6.8	-52.73
7	15961 PK	66.84	74	-7.16	-40.8	-36.62	6.8	-28.42
8	15958.12 AV	54.9	54	* 0.9	-51.44	-49.19	6.8	-40.36

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

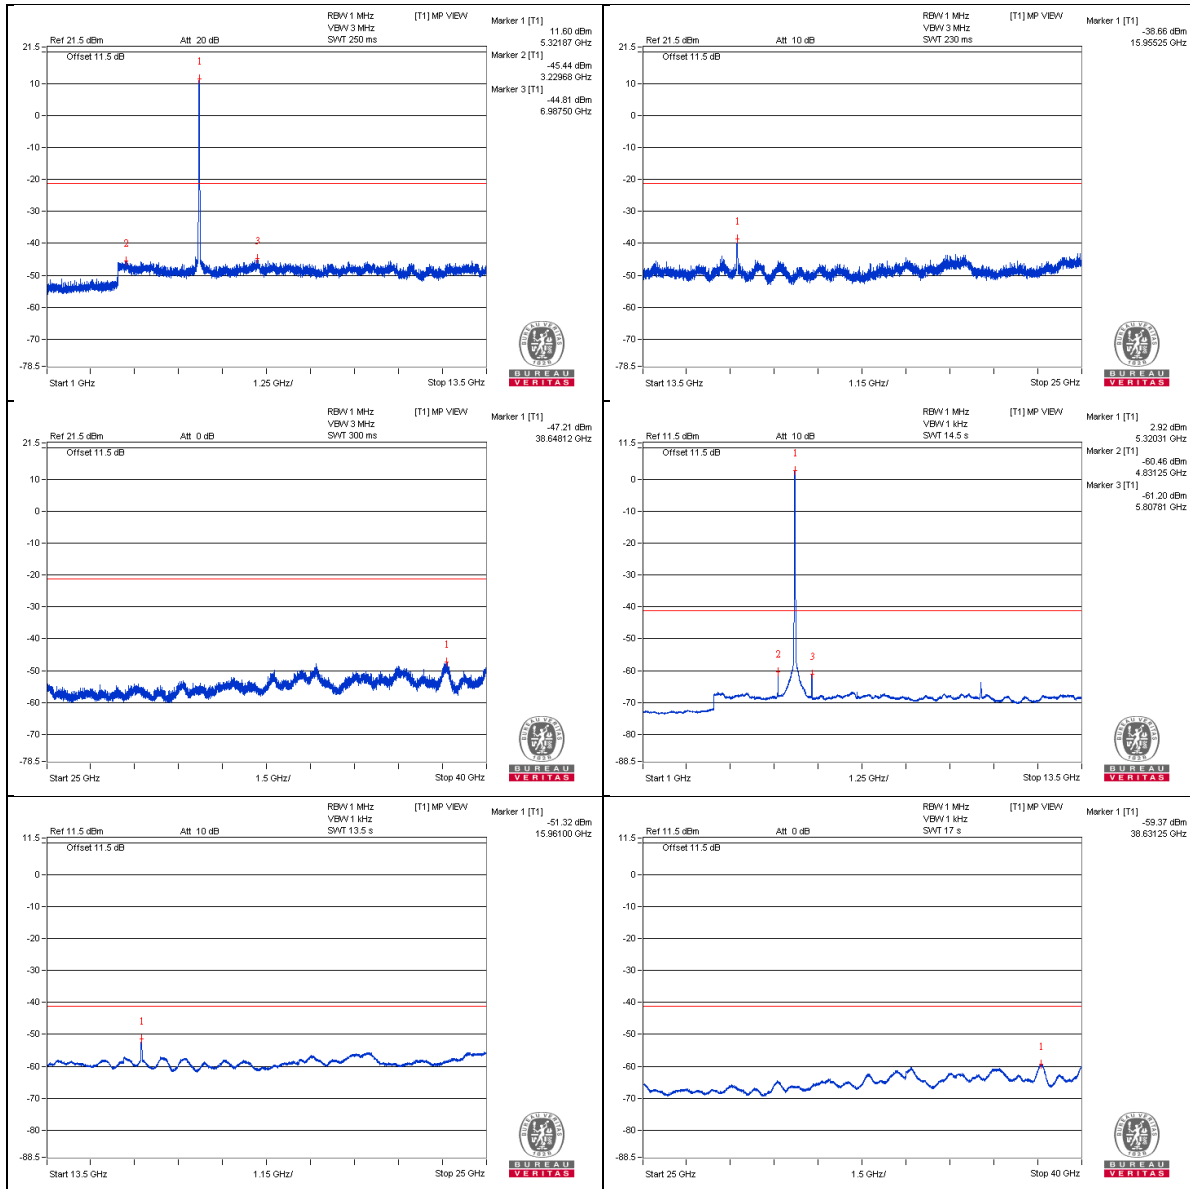

Chain 1

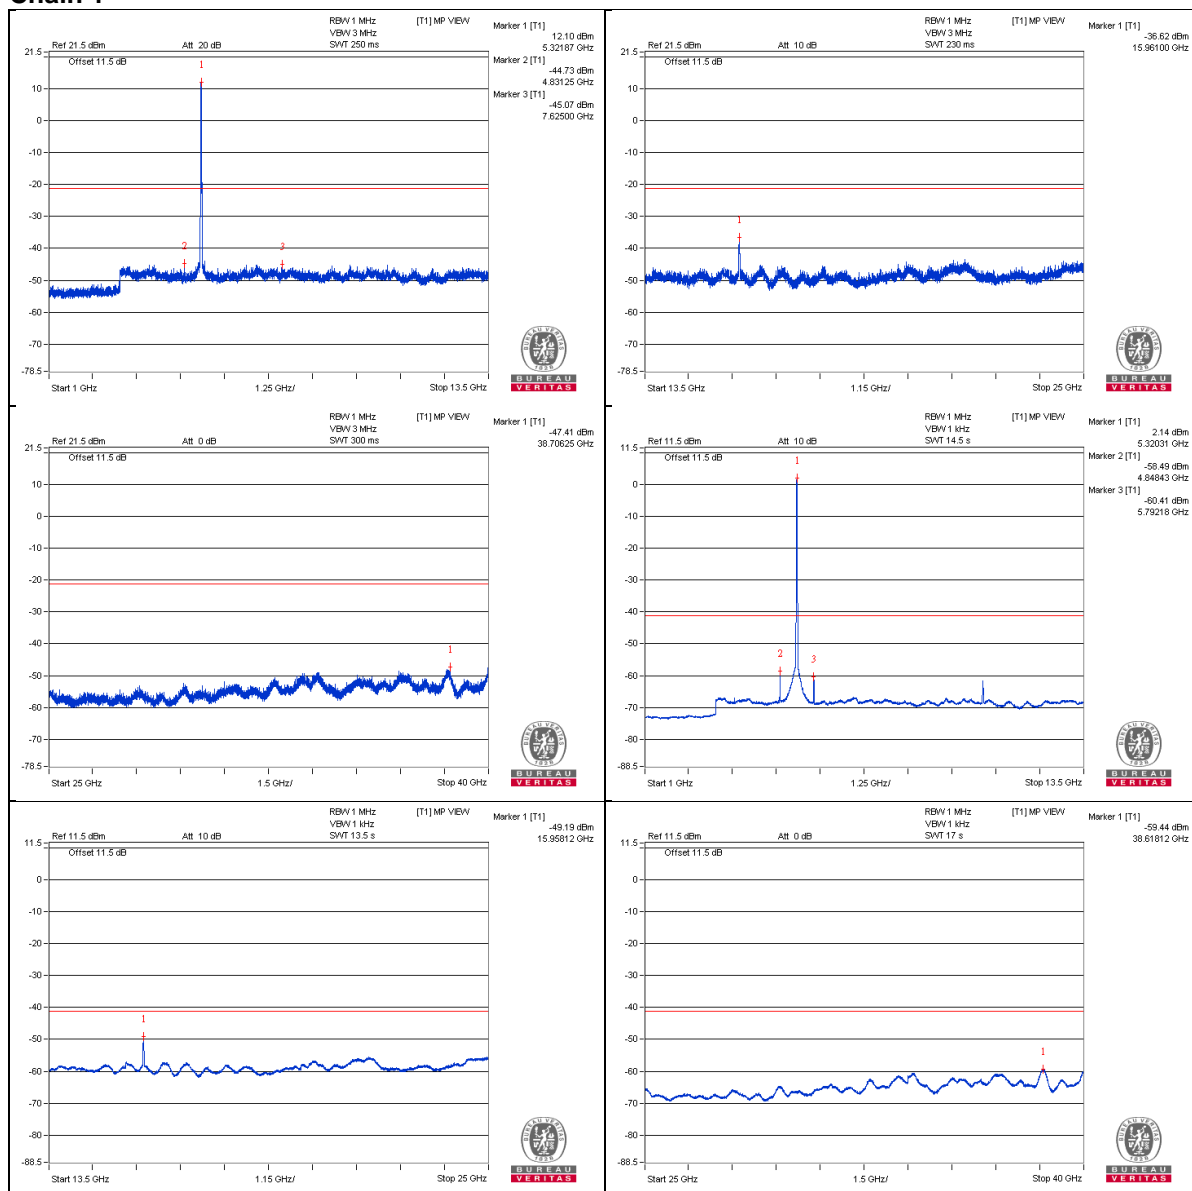

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5351.67 PK	68.54	74	-5.46	-36.56	-36.51	6.8	-26.72
2	5350 AV	53.47	54	-0.53	-51.46	-51.75	6.8	-41.79

Note :



$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain 0

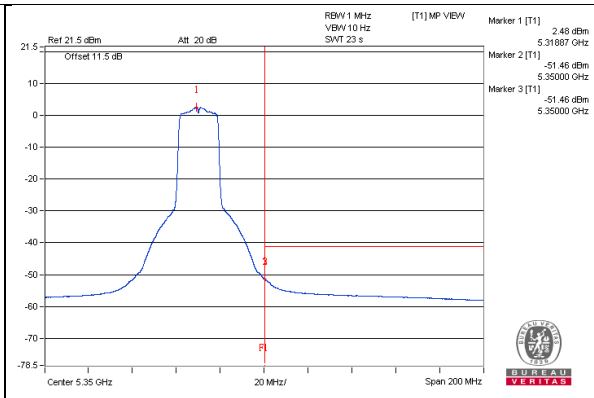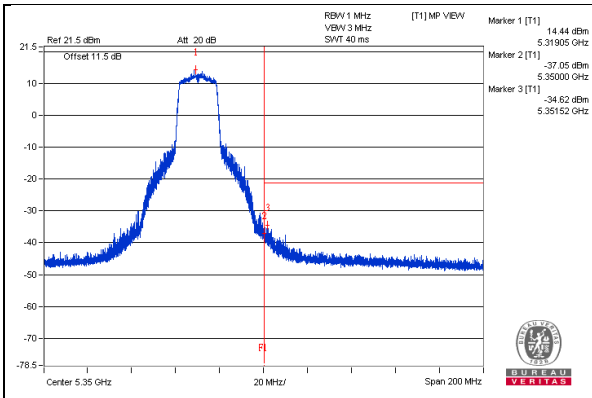

Chain 1

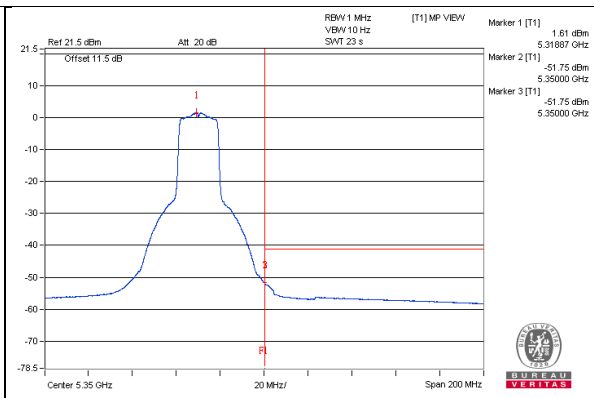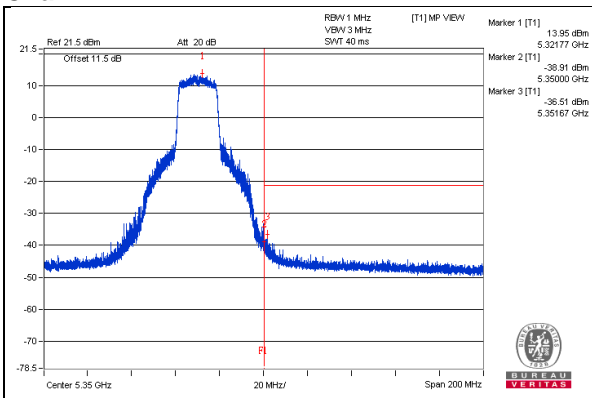


802.11ac (VHT20) – Channel 100
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3664.06 PK	57.48	74	-16.52	-46.6	-48.87	6.8	-37.78
2	3665.62 AV	38.39	54	-15.61	-67.26	-66.17	6.8	-56.87
3	7328.12 PK	58.42	74	-15.58	-47.13	-46.22	6.8	-36.84
4	7332.81 AV	39.27	54	-14.73	-64.56	-67.54	6.8	-55.99
5	10992.18 PK	59.65	74	-14.35	-48.82	-43.54	6.8	-35.61
6	11001.56 AV	46.75	54	-7.25	-64.86	-55.82	6.8	-48.51
7	16502.93 PK	66.62	68.2	-1.58	-40.57	-37.03	6.8	-28.64


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

Chain 0

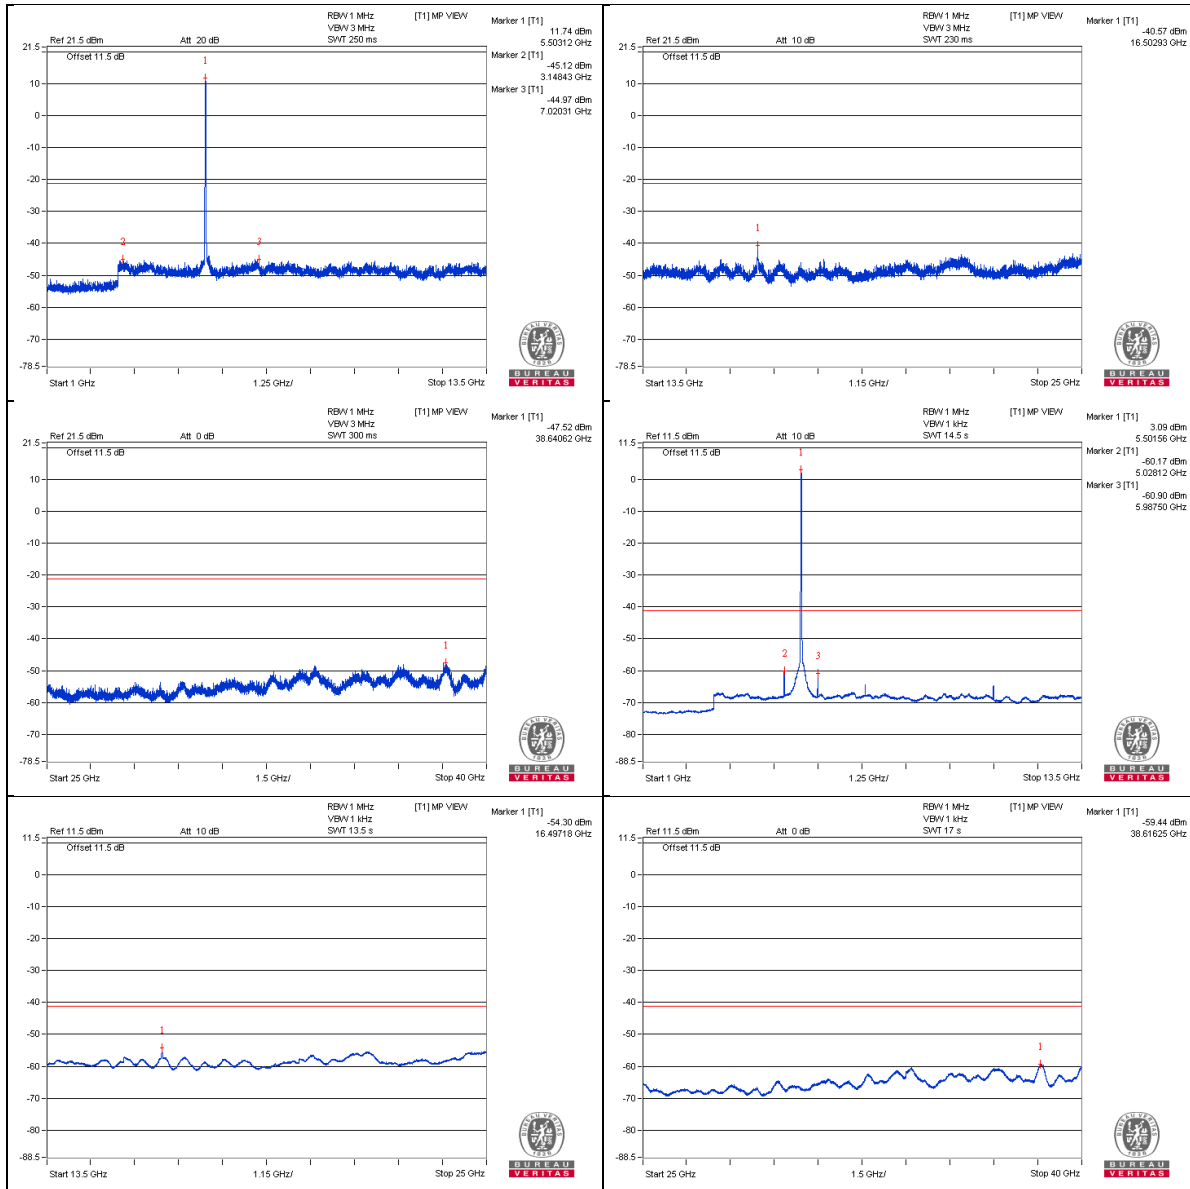

Chain 1

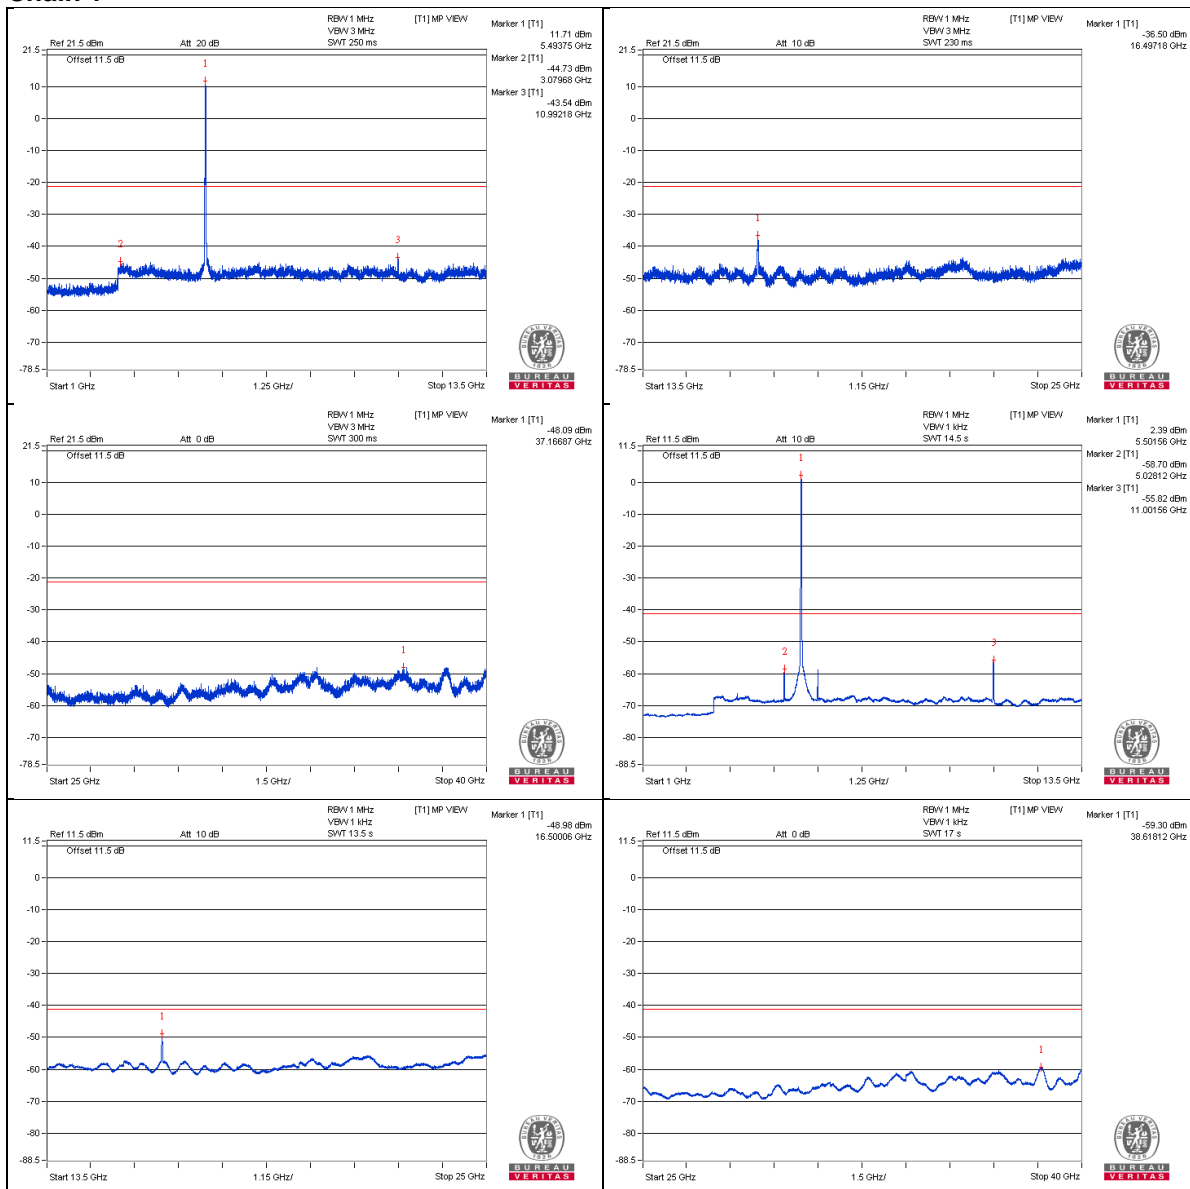


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5467.81 PK	68.64	74	-5.36	-34.47	-40.12	6.8	-26.62
2	5470 AV	53.52	54	-0.48	-52.13	-51.04	6.8	-41.74


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain 0

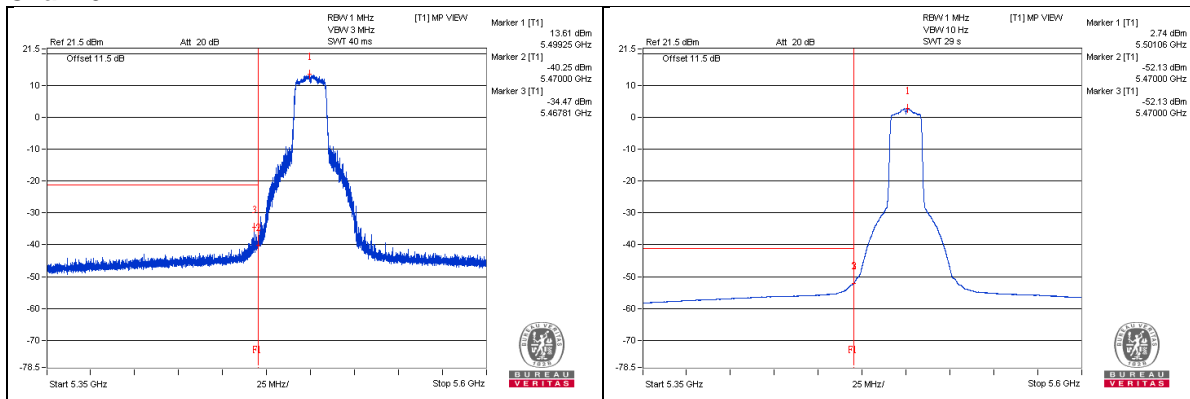

Chain 1

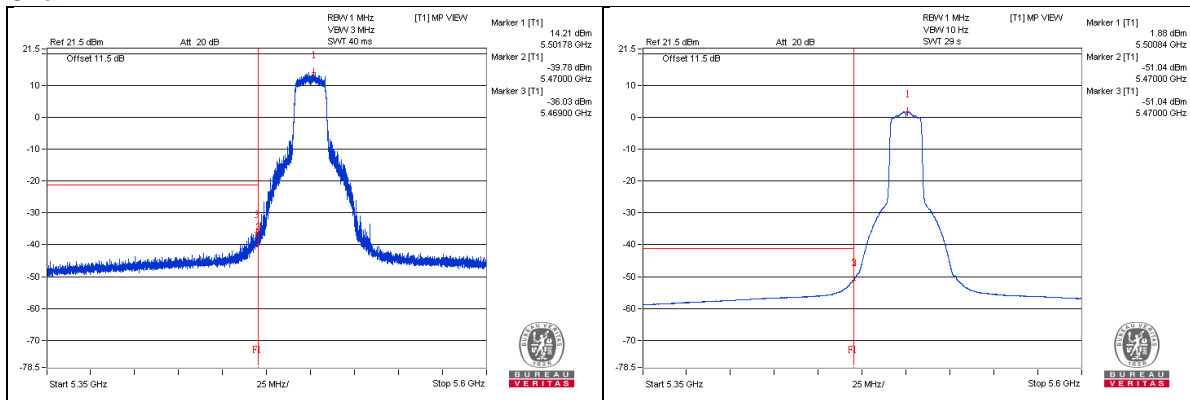

802.11ac (VHT20) – Channel 116
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3715.62 PK	58.91	74	-15.09	-45.46	-46.99	6.8	-36.35
2	3718.75 AV	37.94	54	-16.06	-67.24	-67.02	6.8	-57.32
3	7450 PK	58.06	74	-15.94	-46.63	-47.42	6.8	-37.2
4	7440.62 AV	37.83	54	-16.17	-67.14	-67.35	6.8	-57.43
5	11159.37 PK	60.4	74	-13.6	-48.15	-42.77	6.8	-34.86
6	11160.93 AV	46.57	54	-7.43	-62.22	-56.53	6.8	-48.69
7	16737.25 PK	71.07	68.2	* 2.87	-34.18	-33.83	6.8	-24.19


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

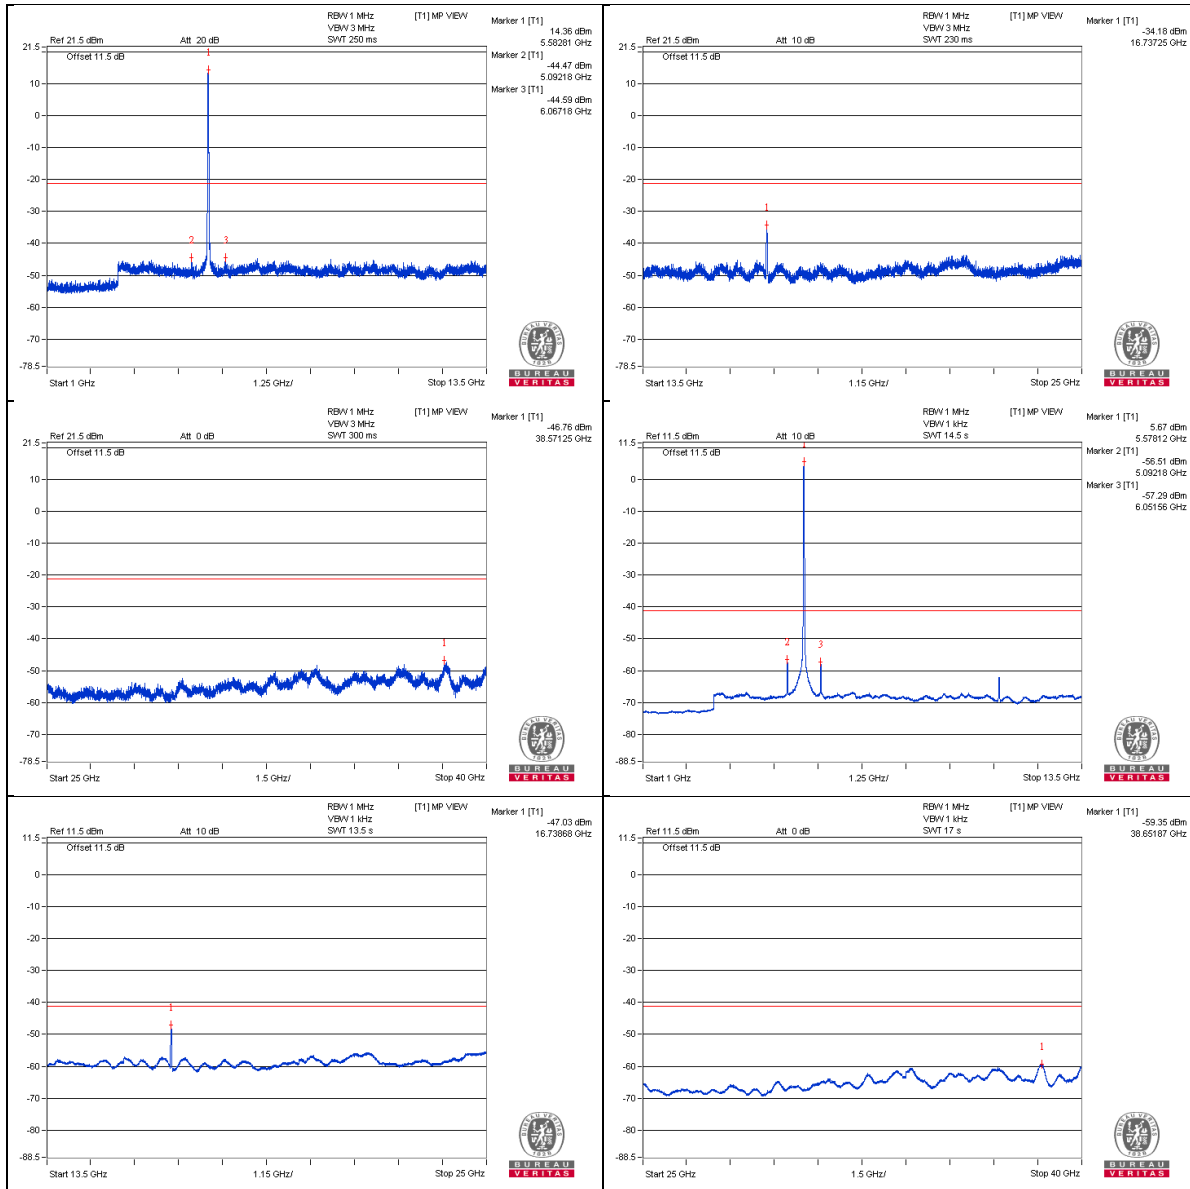

Chain 1

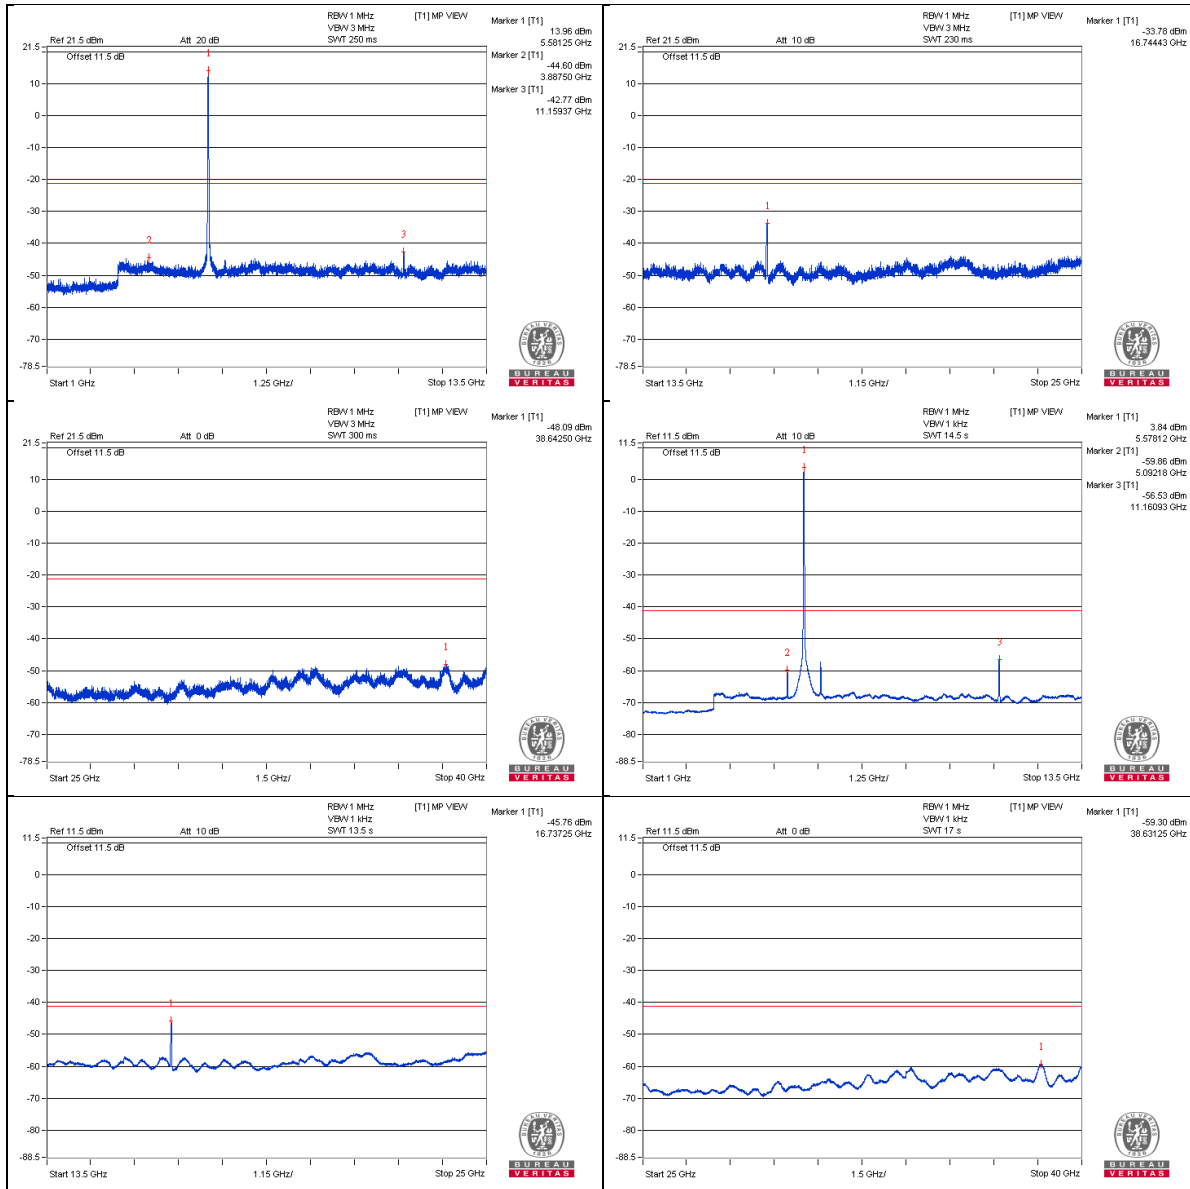

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5465.31 PK	59.79	74	-14.21	-44	-47.09	6.8	-35.47
2	5469.28 AV	47.73	54	-6.27	-57.31	-57.37	6.8	-47.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

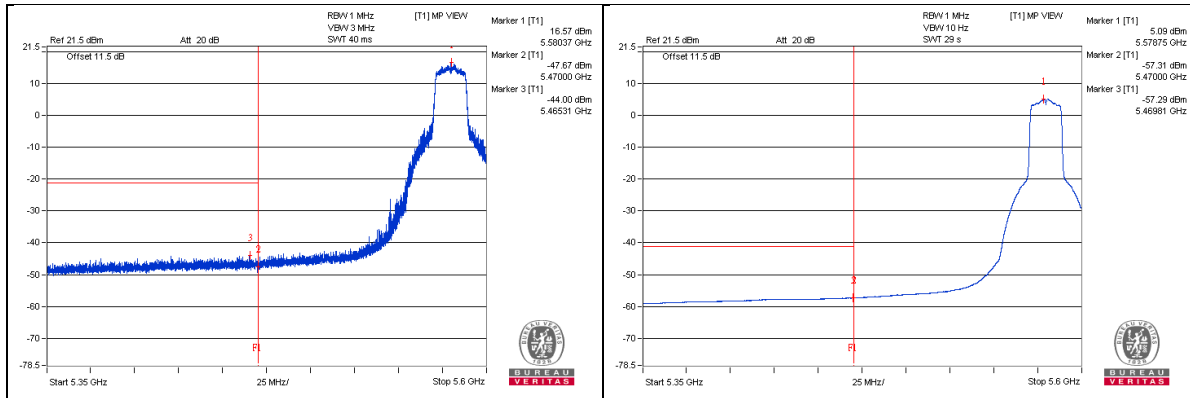

Chain 1

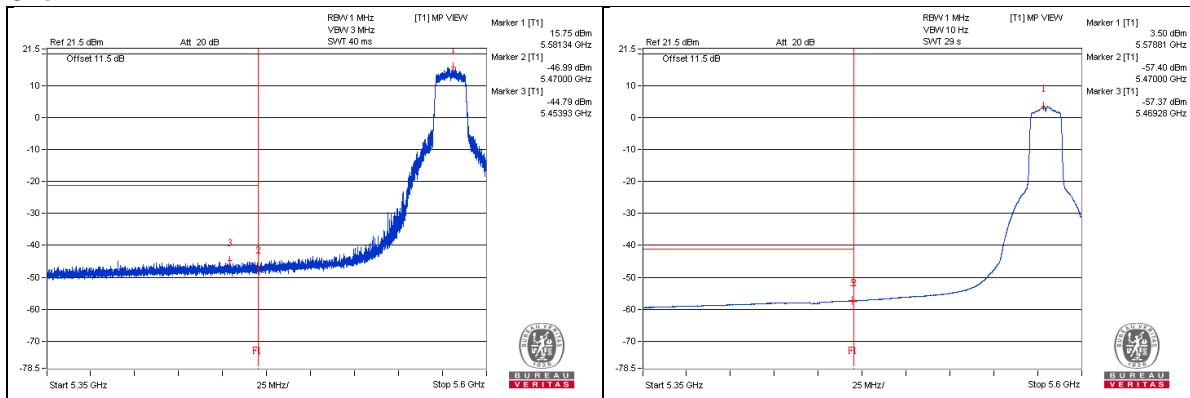


802.11ac (VHT20) – Channel 140
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3796.87 PK	58.64	74	-15.36	-46.66	-46.22	6.8	-36.62
2	3800 AV	38.39	54	-15.61	-67.19	-66.23	6.8	-56.87
3	7606.25 PK	57.41	74	-16.59	-48.47	-46.98	6.8	-37.85
4	7600 AV	38.38	54	-15.62	-65.56	-68.23	6.8	-56.88
5	11403.12 PK	59.97	74	-14.03	-46.72	-43.92	6.8	-35.29
6	11401.56 AV	45.3	54	-8.7	-61.91	-58.34	6.8	-49.96
7	17096.62 PK	66.64	68.2	-1.56	-41.23	-36.74	6.8	-28.62


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.

Chain 0

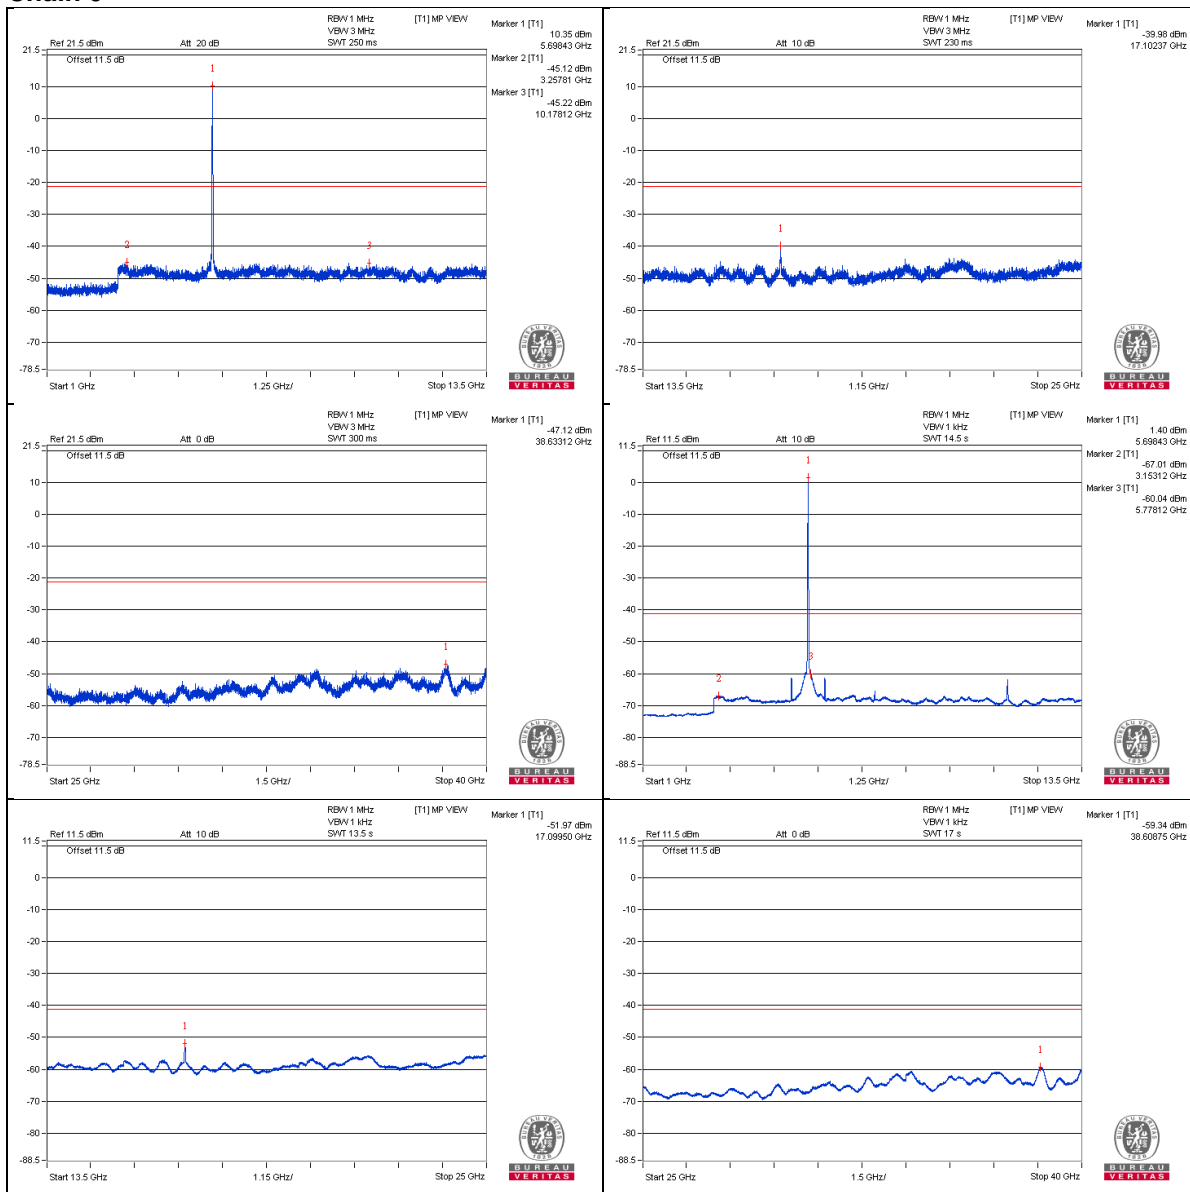

Chain 1

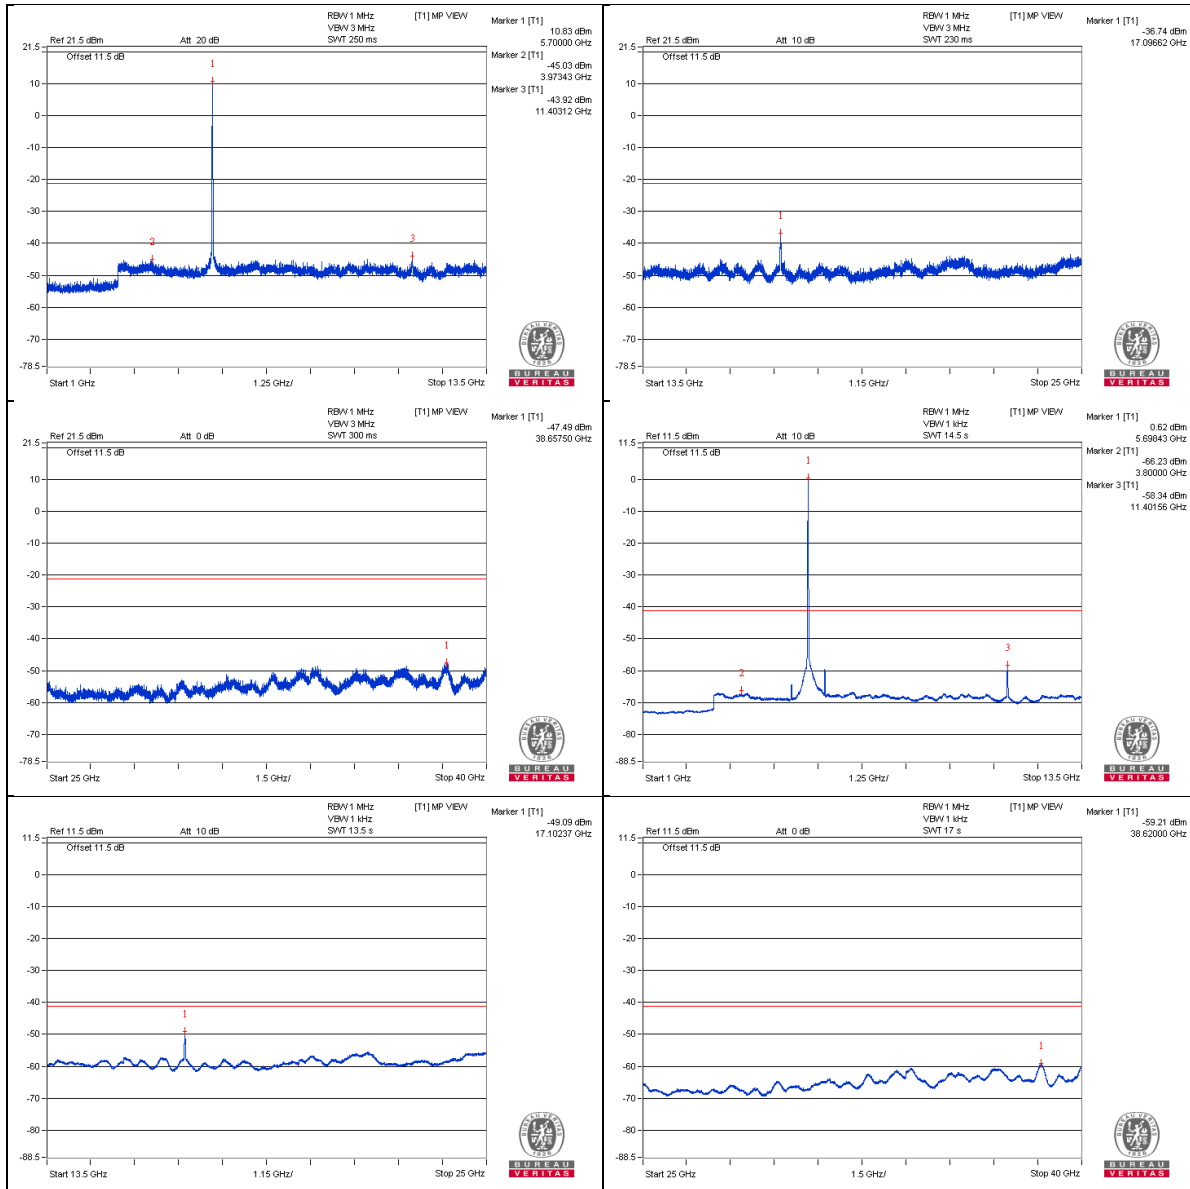

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5725.02 PK	66.97	74	-7.03	-37.11	-39.38	6.8	-28.29
2	5725 AV	53.15	54	-0.85	-51.23	-52.75	6.8	-42.11

Note :



$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain 0

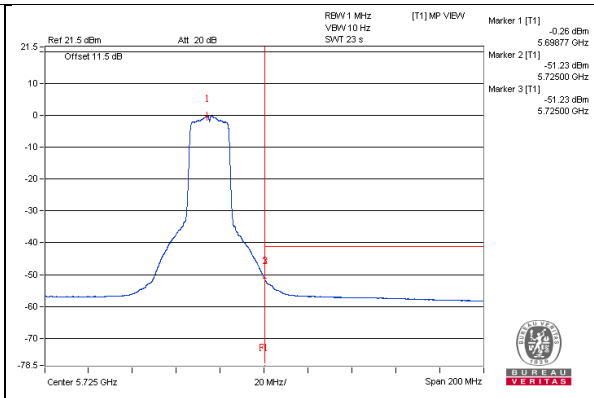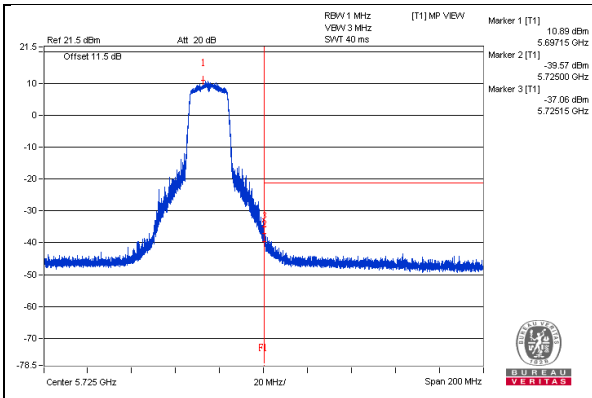

Chain 1

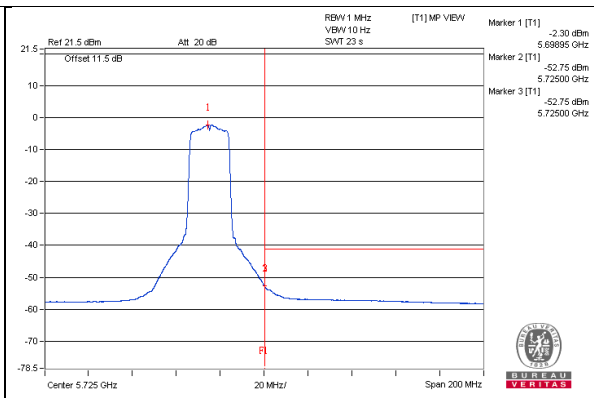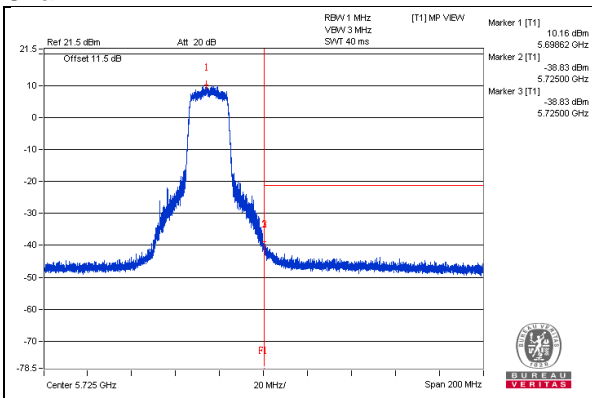

802.11ac (VHT20) – Channel 144
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3804.68 PK	58.39	74	-15.61	-46.72	-46.64	6.8	-36.87
2	3821.87 AV	37.51	54	-16.49	-67.65	-67.47	6.8	-57.75
3	7623.43 PK	57.79	74	-16.21	-46.72	-47.92	6.8	-37.47
4	7626.56 AV	37.83	54	-16.17	-66.49	-68.14	6.8	-57.43
5	11439.06 PK	63.82	74	-10.18	-42.68	-40.17	6.8	-31.44
6	11440.62 AV	51.68	54	-2.32	-54.93	-52.25	6.8	-43.58
7	17161.31 PK	80.2	68.2	* 12	-28.99	-22.79	6.8	-15.06

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)

Chain 0

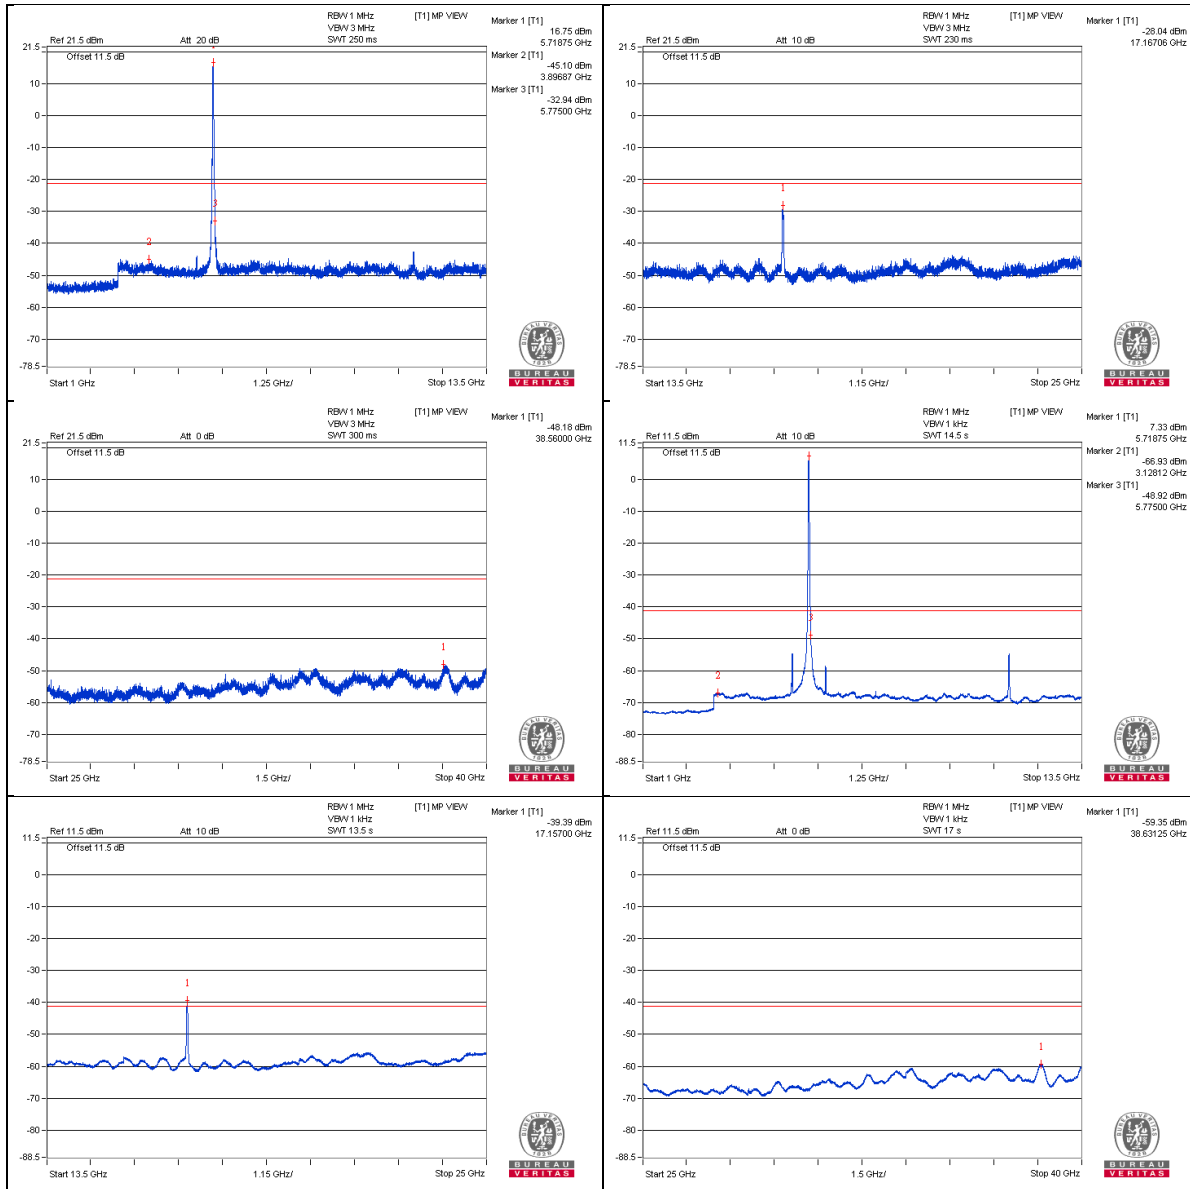

Chain 1

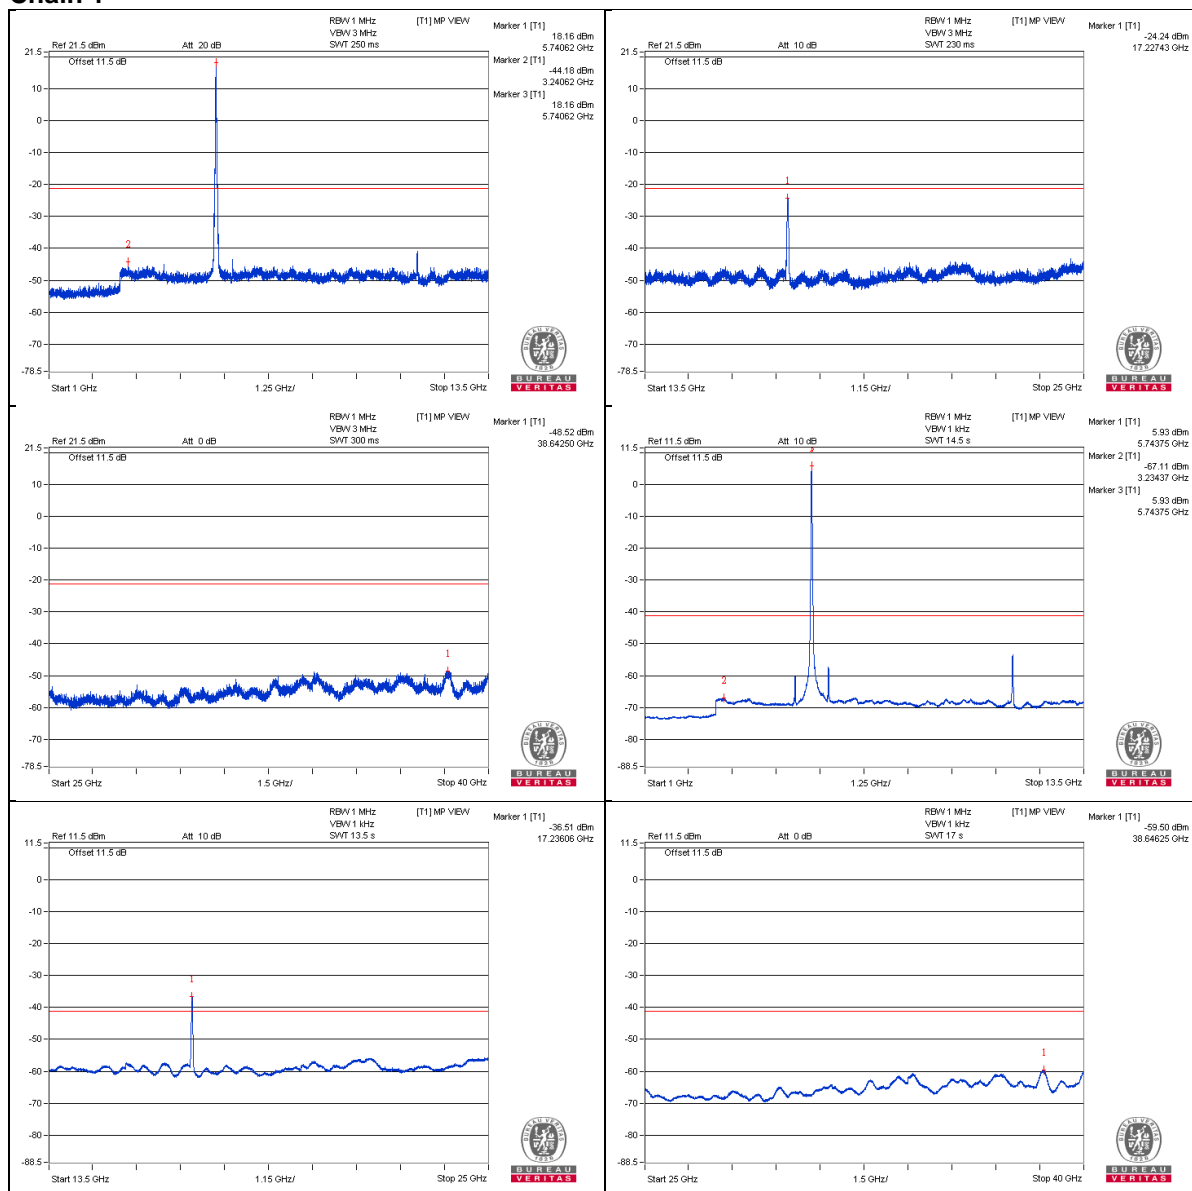

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	5863.75 PK	60.07	74	-13.93	-44.04	-46.23	6.8	-35.19
2	5850.4 AV	47.26	54	-6.74	-57.68	-57.94	6.8	-48

Note :


$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

Chain 0

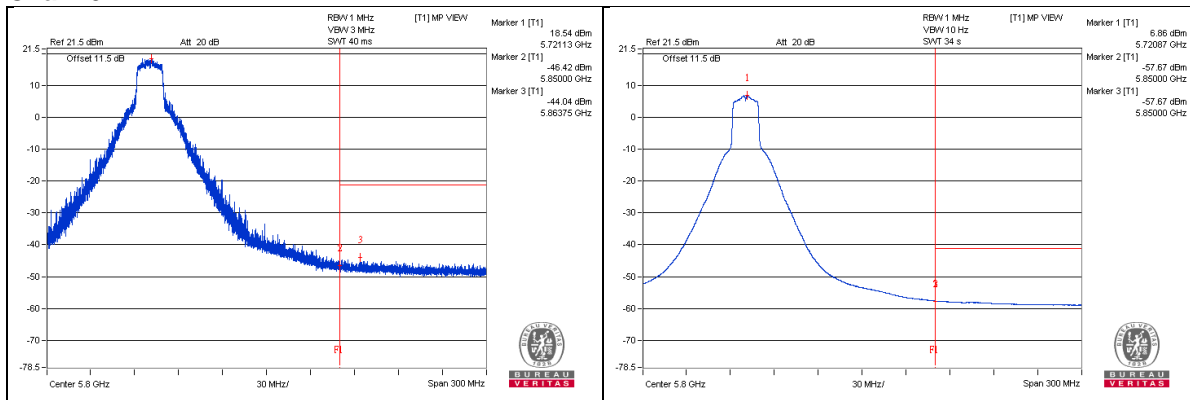

Chain 1

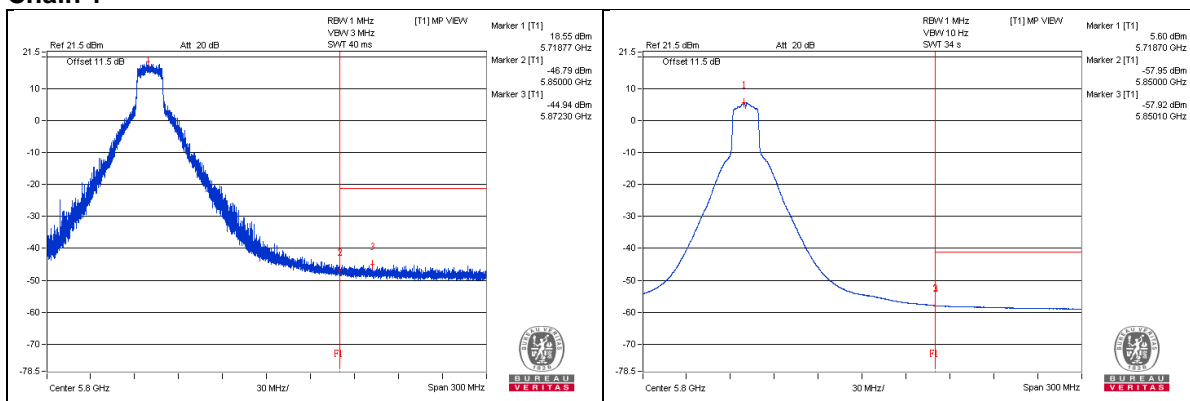

802.11ac (VHT20) – Channel 149
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3831.25 PK	58.39	74	-15.61	-45.51	-48.28	6.8	-36.87
2	3821.87 AV	37.41	54	-16.59	-67.5	-67.83	6.8	-57.85
3	7668.75 PK	57.01	74	-16.99	-47.13	-49.24	6.8	-38.25
4	7660.93 AV	37.18	54	-16.82	-67.72	-68.07	6.8	-58.08
5	11492.18 PK	62.67	74	-11.33	-44.97	-40.8	6.8	-32.59
6	11489.06 AV	50	54	-4	-57.08	-53.7	6.8	-45.26
7	17237.5 PK	79.12	68.2	* 10.92	-26.73	-25.29	6.8	-16.14


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
 d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)


Chain 0

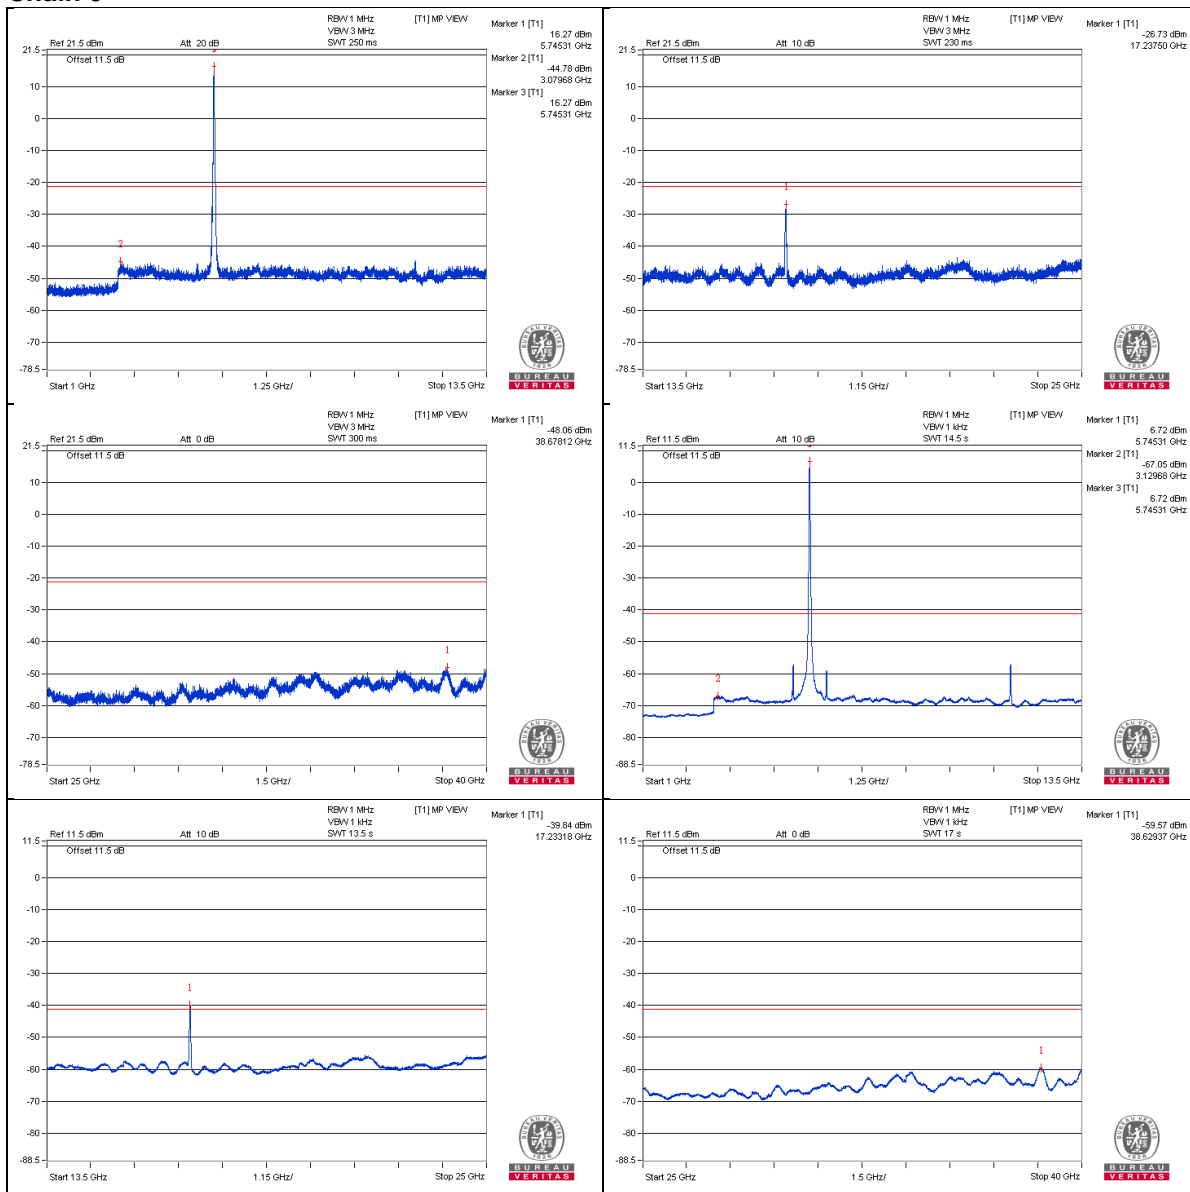


Chain 1

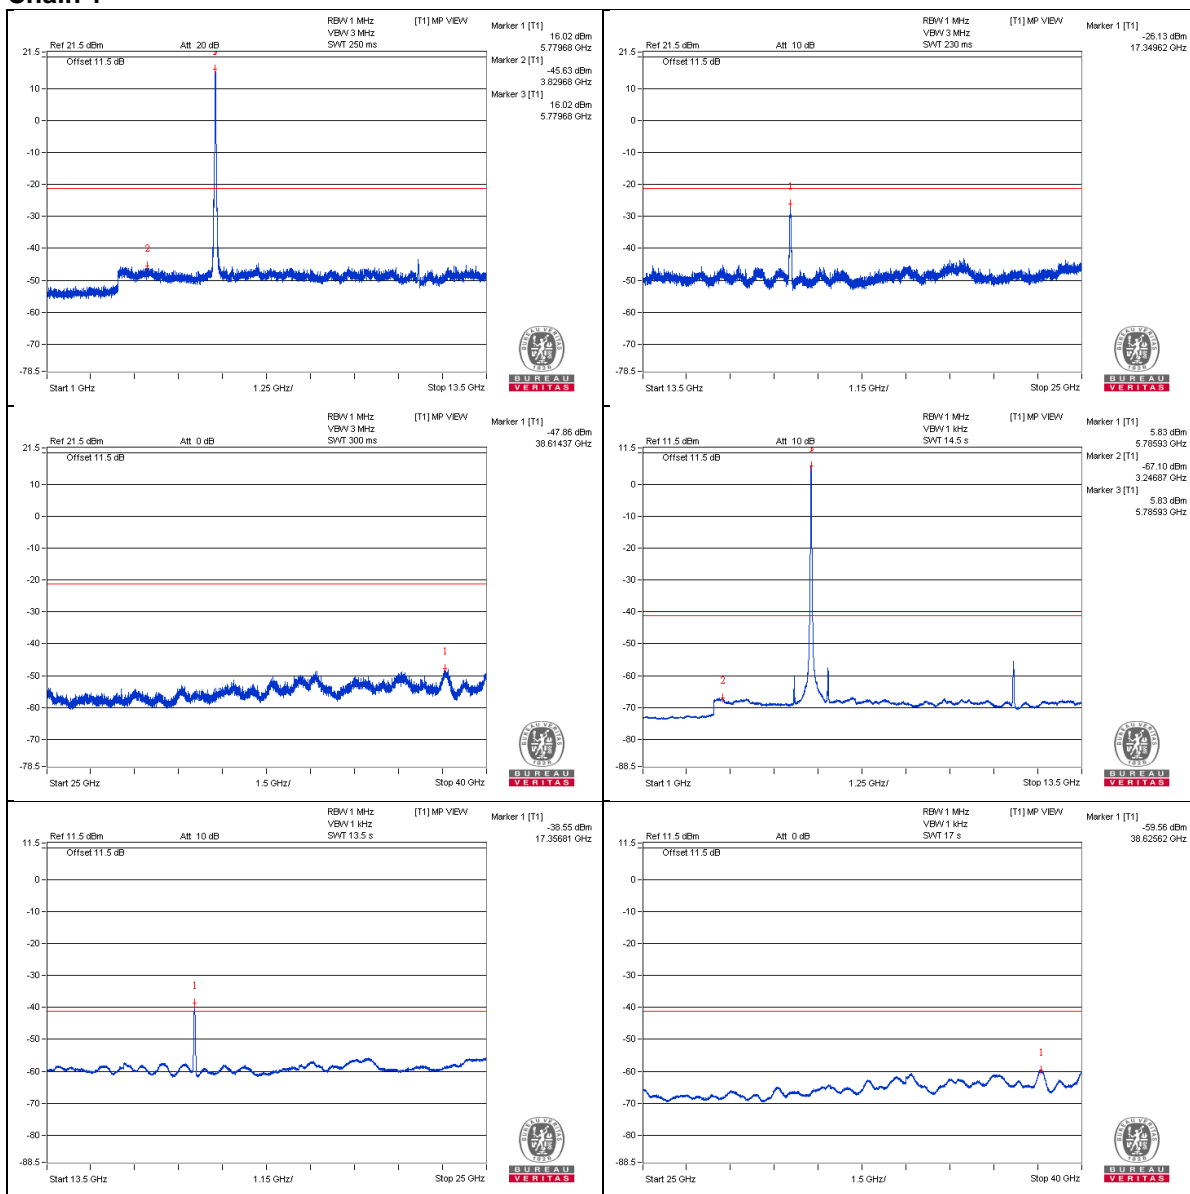

Bandedge table Chain 0

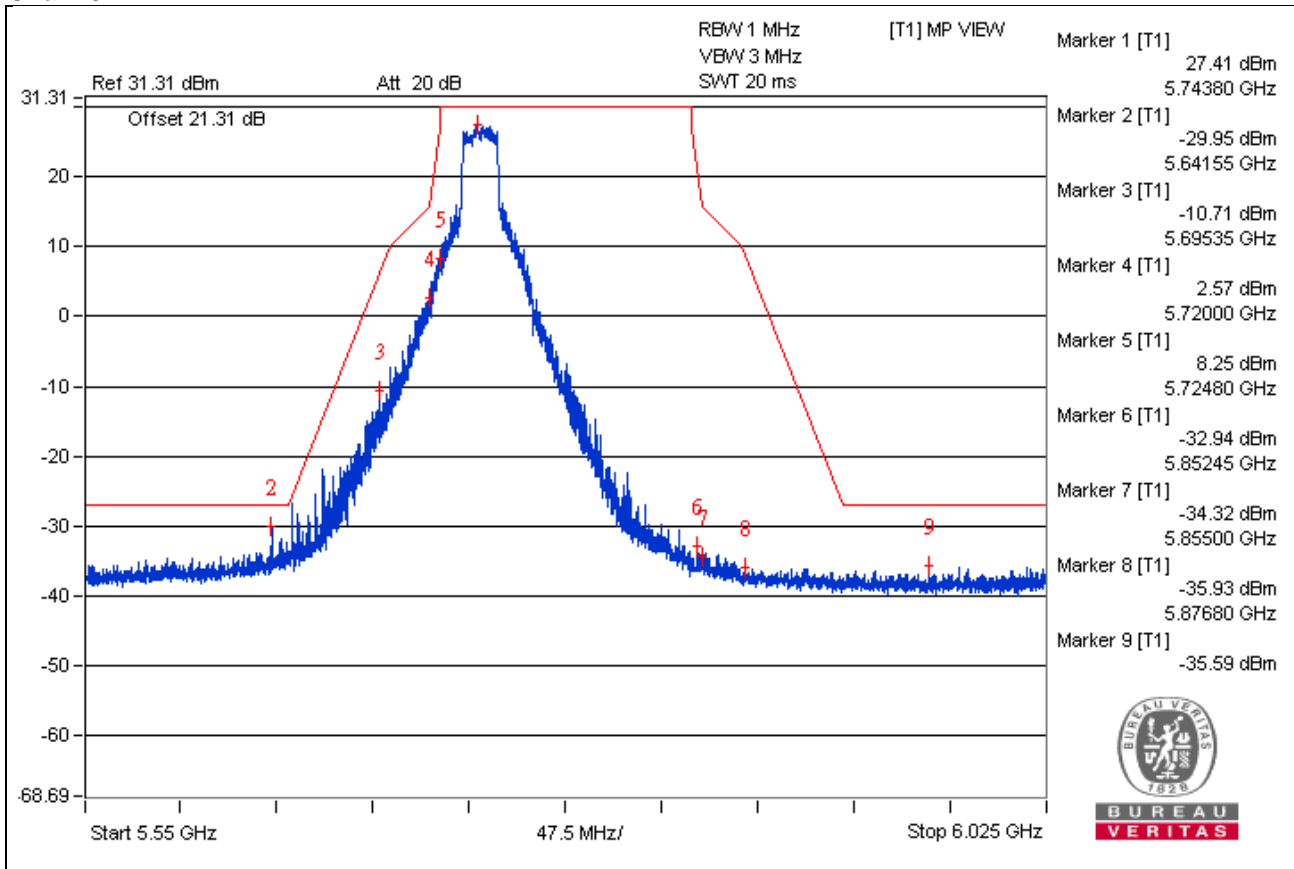

Chain 1

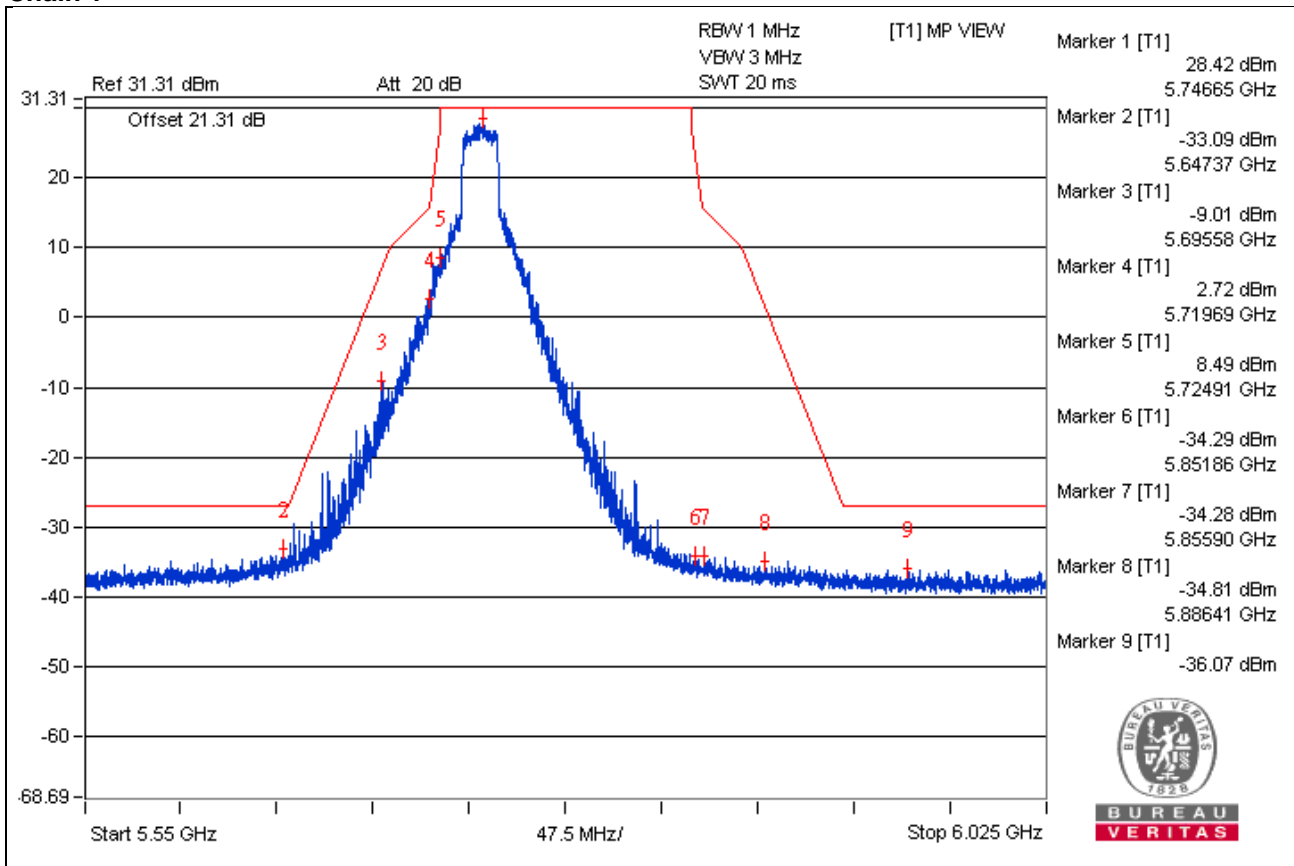

802.11ac (VHT20) – Channel 157
Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain 0	Chain 1		
1	3864.06 PK	58.45	74	-15.55	-46.88	-46.38	6.8	-36.81
2	3856.25 AV	37.42	54	-16.58	-67.84	-67.46	6.8	-57.84
3	7706.25 PK	56.95	74	-17.05	-47.91	-48.35	6.8	-38.31
4	7712.5 AV	36.74	54	-17.26	-68.05	-68.63	6.8	-58.52
5	11571.87 PK	60.41	74	-13.59	-46.14	-43.56	6.8	-34.85
6	11570.31 AV	47.79	54	-6.21	-60.31	-55.51	6.8	-47.47
7	17349.62 PK	76.34	68.2	* 8.14	-36.21	-26.13	6.8	-18.92

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer Appendix A)


Chain 0

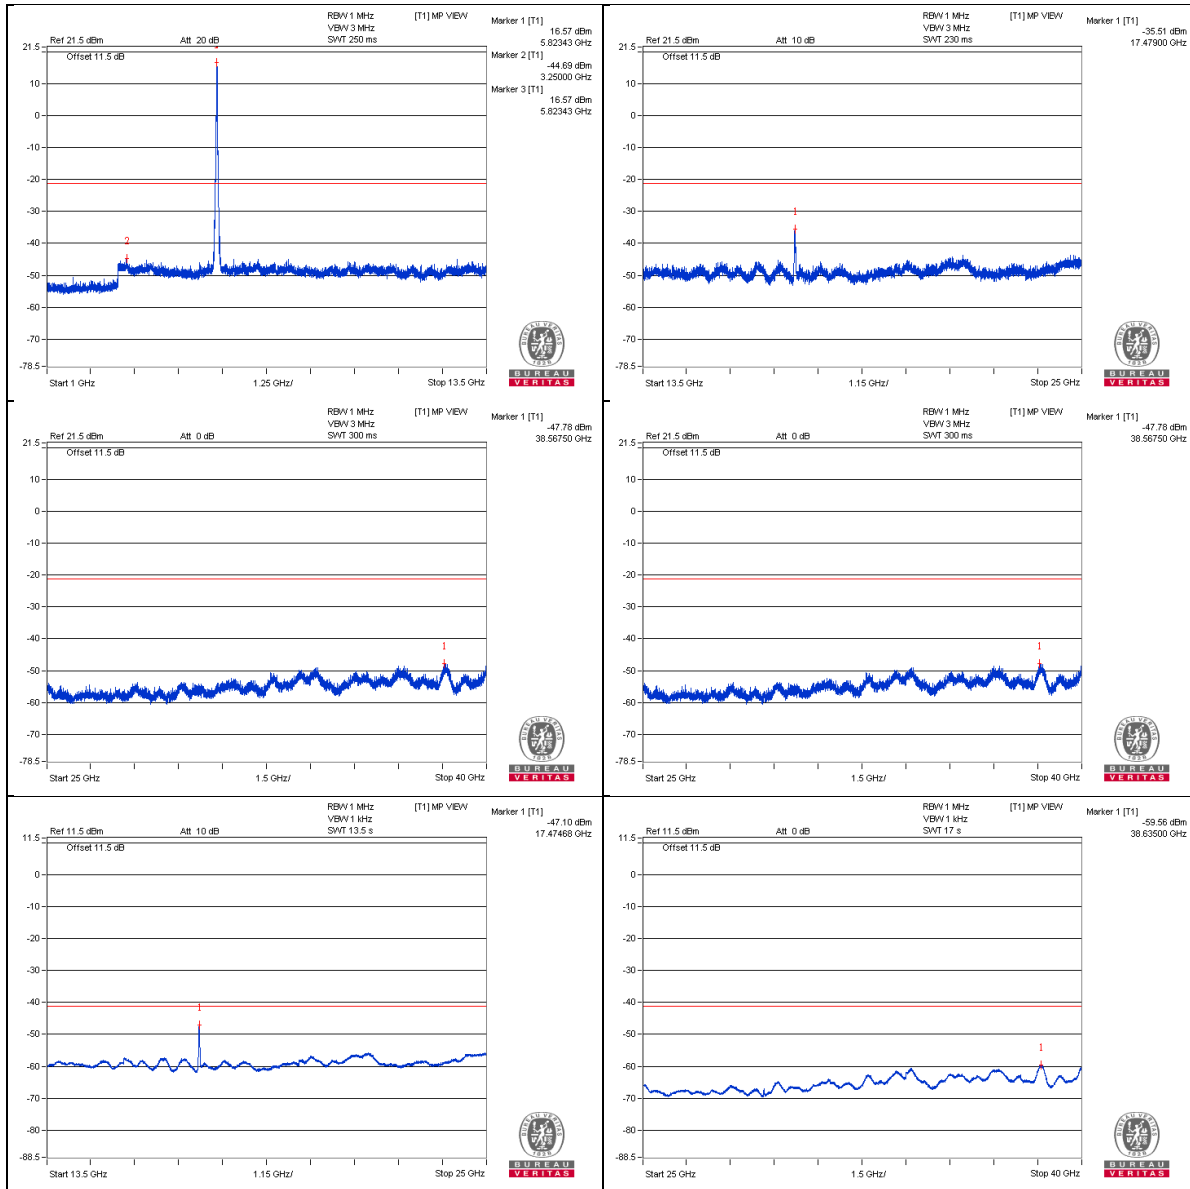

Chain 1

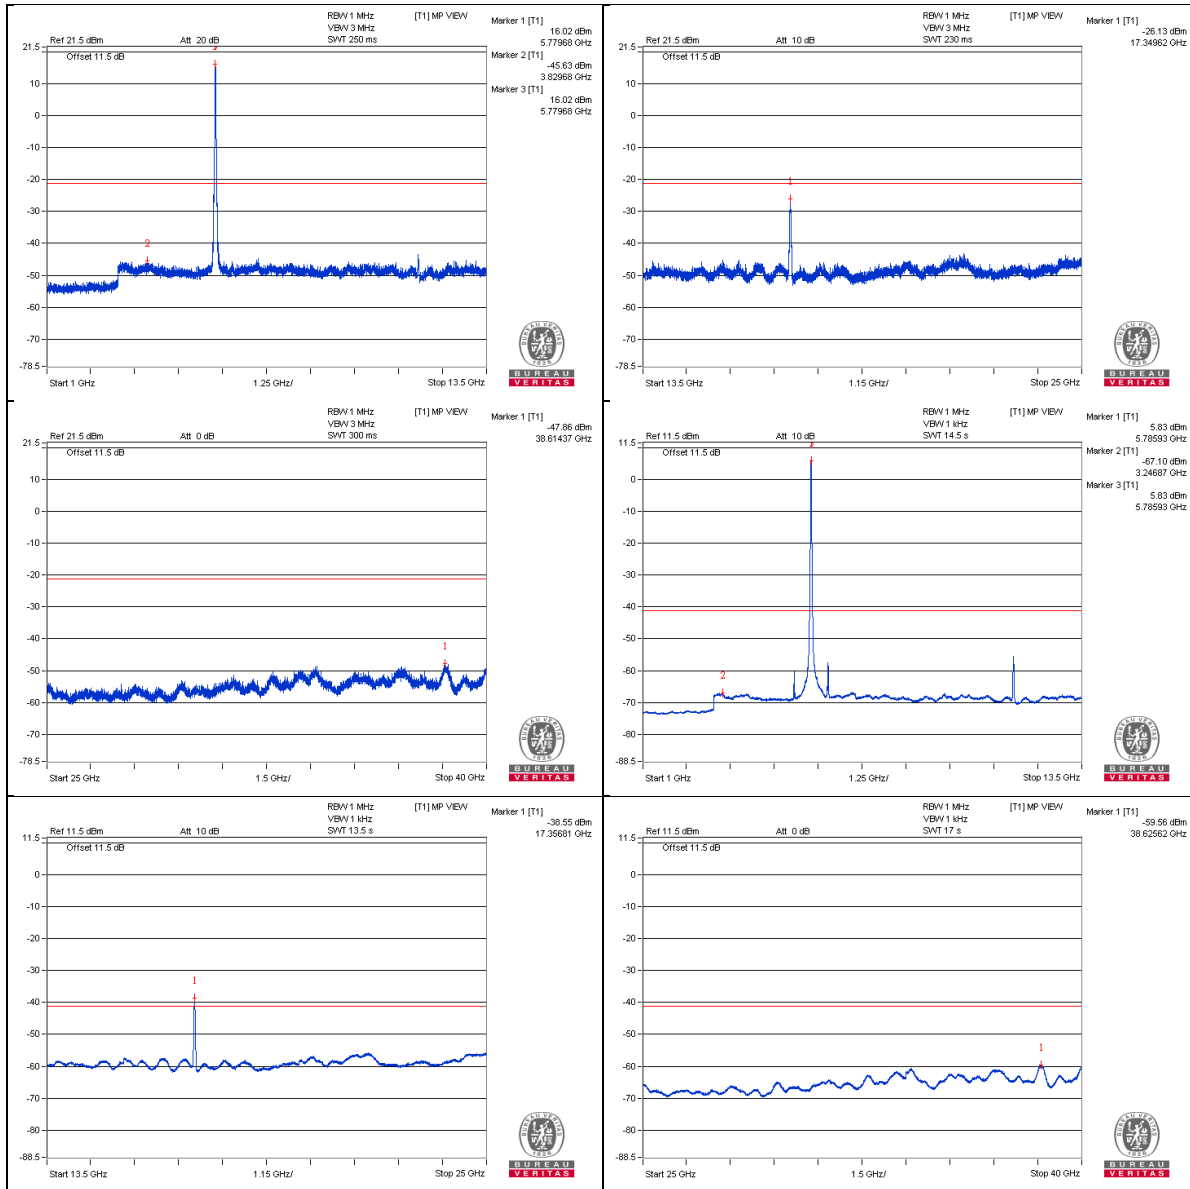

Bandedge table Chain 0

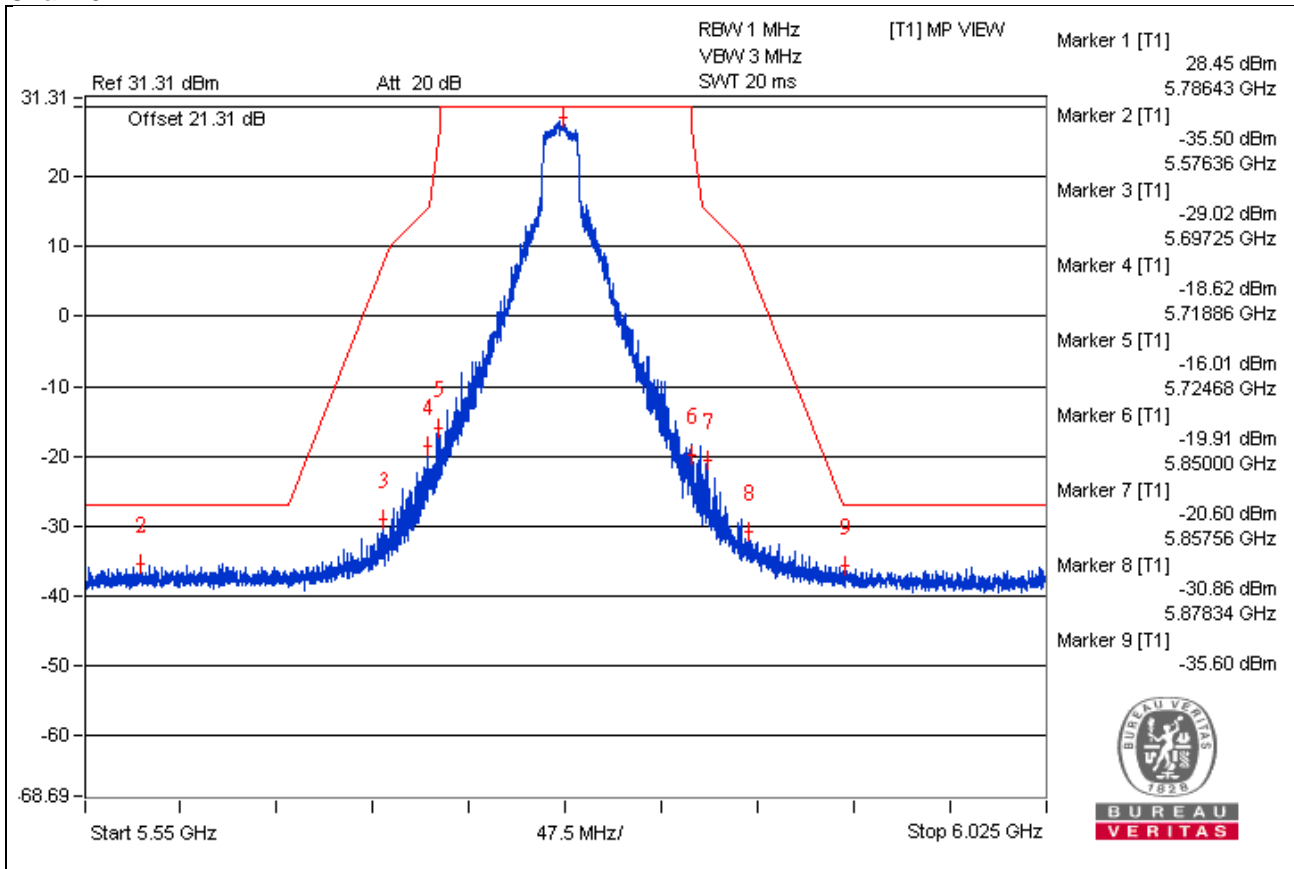

Chain 1

