



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Microsoft Corporation
Applicant Address	One Microsoft Way Redmond WA 98052 USA
FCC ID	C3K1804
Manufacturer's company	Microsoft Corporation
Manufacturer Address	One Microsoft Way Redmond WA 98052 USA

Product Name	802.11n 1T2R wireless radio
Brand Name	Microsoft
Model No.	1804
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Jul. 07, 2016
Final Test Date	Jul. 23, 2016
Submission Type	Original Equipment

### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r02, KDB662911 D01 v02r01, ET Docket No. 13-49; FCC 16-24.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes .....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. EUT Operation during Test .....	10
3.10. Duty Cycle.....	10
3.11. Test Configurations .....	11
<b>4. TEST RESULT</b> .....	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	18
4.3. 6dB Spectrum Bandwidth Measurement .....	32
4.4. Maximum Conducted Output Power Measurement.....	37
4.5. Power Spectral Density Measurement .....	40
4.6. Radiated Emissions Measurement .....	48
4.7. Band Edge Emissions Measurement .....	79
4.8. Frequency Stability Measurement .....	89
4.9. Antenna Requirements .....	92
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>93</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>95</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A9</b>



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR670537AB	Rev. 01	Initial issue of report	Aug. 26, 2016



## 1. VERIFICATION OF COMPLIANCE

Product Name : 802.11n 1T2R wireless radio  
Brand Name : Microsoft  
Model No. : 1804  
Applicant : Microsoft Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 07, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies
4.4	15.407(a)	Maximum Conducted Output Power	Complies
4.5	15.407(a)	Power Spectral Density	Complies
4.6	15.407(b)	Radiated Emissions	Complies
4.7	15.407(b)	Band Edge Emissions	Complies
4.8	15.407(g)	Frequency Stability	Complies
4.9	15.203	Antenna Requirements	Complies

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (1TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11a: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth
Channel Bandwidth (99%)	<b>For PIFA Ant.</b> Band 1: IEEE 802.11a: 16.85 MHz IEEE 802.11n MCS0 (HT20): 17.80 MHz Band 4: IEEE 802.11a: 17.19 MHz IEEE 802.11n MCS0 (HT20): 17.97 MHz <b>For Dipole Ant.</b> Band 1: IEEE 802.11a: 16.85 MHz IEEE 802.11n MCS0 (HT20): 17.80 MHz Band 4: IEEE 802.11a: 17.19 MHz IEEE 802.11n MCS0 (HT20): 17.92 MHz
Maximum Conducted Output Power	<b>For PIFA Ant.</b> Band 1: IEEE 802.11a: 15.05 dBm IEEE 802.11n MCS0 (HT20): 14.93 dBm Band 4: IEEE 802.11a: 15.14 dBm IEEE 802.11n MCS0 (HT20): 15.53 dBm <b>For Dipole Ant.</b> Band 1: IEEE 802.11a: 15.05 dBm IEEE 802.11n MCS0 (HT20): 14.93 dBm Band 4: IEEE 802.11a: 15.14 dBm IEEE 802.11n MCS0 (HT20): 15.53 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor

#### Antenna and Bandwidth

Antenna	Single (TX)
Bandwidth Mode	20 MHz
IEEE 802.11a	V
IEEE 802.11n	V

#### IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS0-7

Note: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT only supports HT20.

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name (P/N)	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX	3.5	5.0
2	Amphenol	C-8243-15-000-74-TA	Dipole Antenna	I-PEX	-	6.49

Note: The EUT has two antennas.

**For 2.4GHz WLAN function:**

**For IEEE 802.11b/g/n mode (1TX/1RX):**


Only Chain 1 can be used as transmitting antenna and receiving antenna.

**For 5GHz WLAN function:**

**For IEEE 802.11a/n mode (1TX/2RX):**

Only Chain 2 can be used as transmitting antenna.

Both Chain 2 and Chain 3 can be used as receiving antenna.

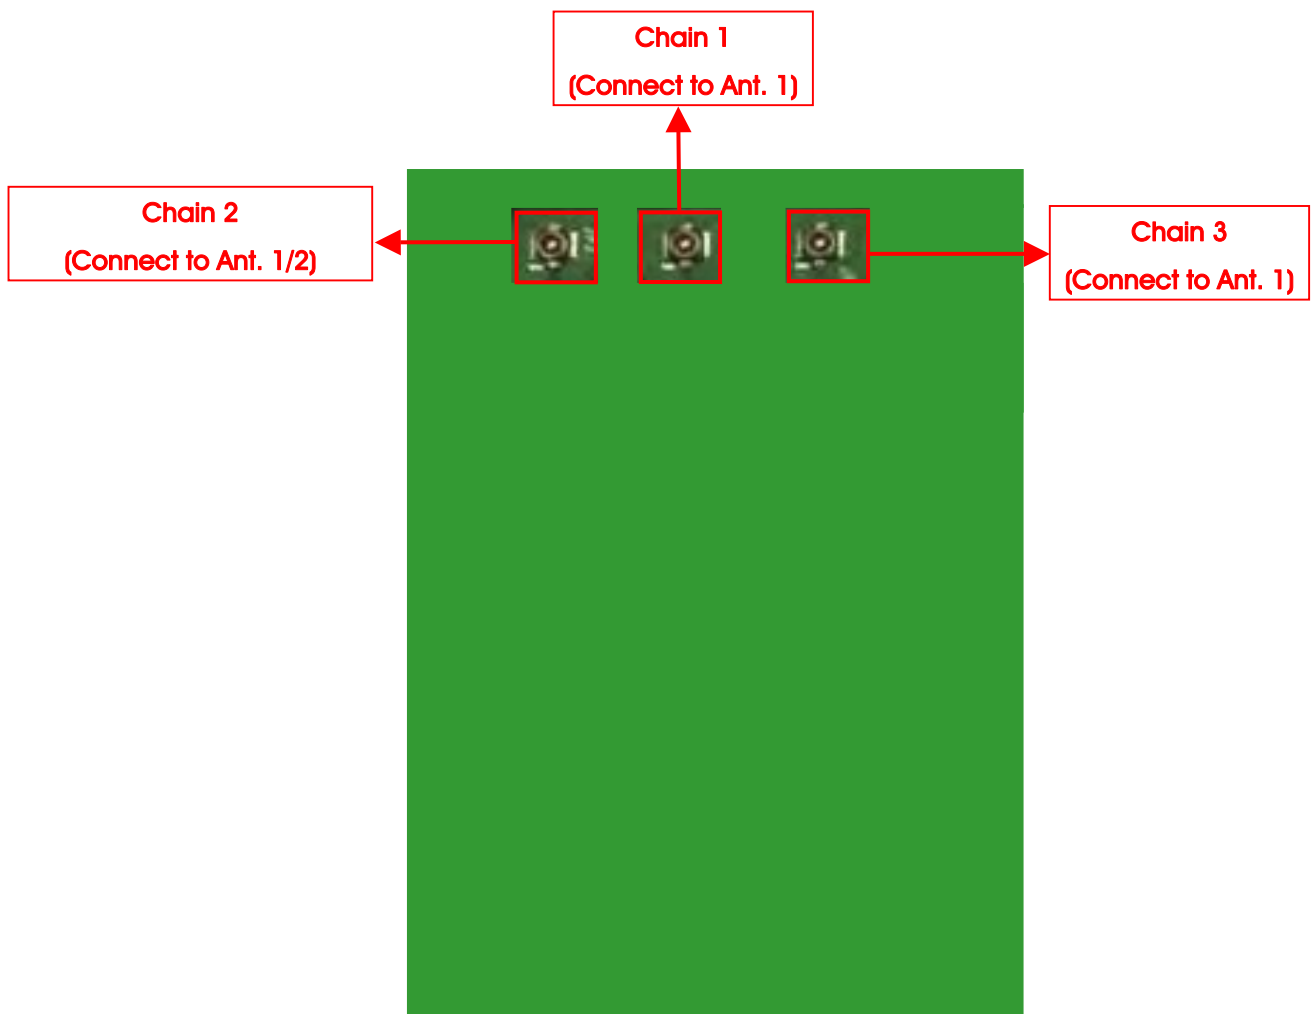



### 3.4. Table for Carrier Frequencies

The EUT has only one bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157 /165	2
	11n HT20	Band 1&4	MCS0	36/40/48/149/157 /165	2
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157 /165	2
	11n HT20	Band 1&4	MCS0	36/40/48/149/157 /165	2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157 /165	2
	11n HT20	Band 1&4	MCS0	36/40/48/149/157 /165	2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	2
	11n HT20	Band 4	MCS0	149/157/165	2
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157 /165	2
	11n HT20	Band 1&4	MCS0	36/40/48/149/157 /165	2
Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157 /165	2
	11n HT20	Band 1&4	MCS0	36/40/48/149/157 /165	2
Frequency Stability	20 MHz	Band 1&4	-	40/157	2

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. EUT - 2.4GHz

Mode 2. EUT - 5GHz

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Below 1GHz):**

Mode 1. EUT - 2.4GHz

Mode 2. EUT - 5GHz

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Above 1GHz):**

The EUT can be placed in X-axis, Y-axis and Z-axis. After evaluating, The worst case was found at X-axis, so it's recorded in this report.

Mode 1. CTX

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

#### For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
AP Router	Planex	GW-AP54SGX	KA220030603014-1
NB	DELL	E6430	DoC
Test fixture	Liteon	WCBN3501R(PC)_EVB	N/A
Earphone	SHYARO CHI	MIC-04	DoC
Mouse	Logitech	M-U0026	DoC

#### For Test Site No: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
WLAN AP	Netgear	R7500	PY314300288
NB	DELL	E4300	DoC
Test fixture	Liteon	WCBN3501R(PC)_EVB	N/A
Earphone	e-Power	S90W	DoC
Mouse	Logitech	M-U0026	DoC

#### For Test Site No: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
Test fixture	Liteon	WCBN3501R(PC)_EVB	N/A

#### For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Test Fixture	Liteon	WCBN3501R(PC)_EVB	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For PIFA Ant.

Test Software Version	MT 7662 QA V1.0.3.13					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	3F	3F	3F	3F	3E	3E
802.11n MCS0 HT20	3F	3F	3F	3F	3E	3E

For Dipole Ant.

Test Software Version	MT 7662 QA V1.0.3.13					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	3F	3F	3F	3F	3E	3E
802.11n MCS0 HT20	3F	3F	3F	3F	3E	3E

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.430	1.640	87.20	0.60	0.70
802.11n MCS0 HT20	1.340	1.550	86.45	0.63	0.75

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

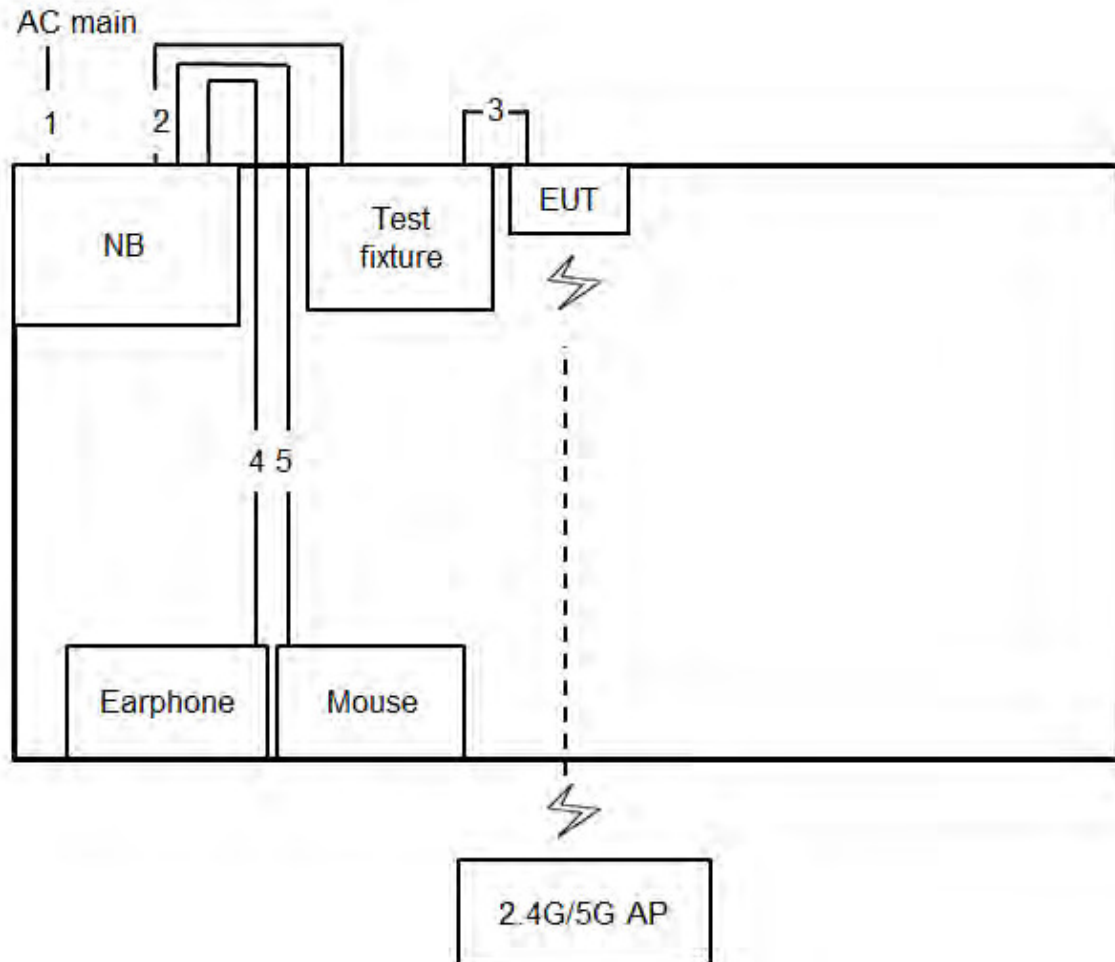

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	USB cable	Yes	0.2m
3	Bus cable	No	0.1m
4	Audio cable	No	1.4m
5	USB cable	Yes	1.8m


### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

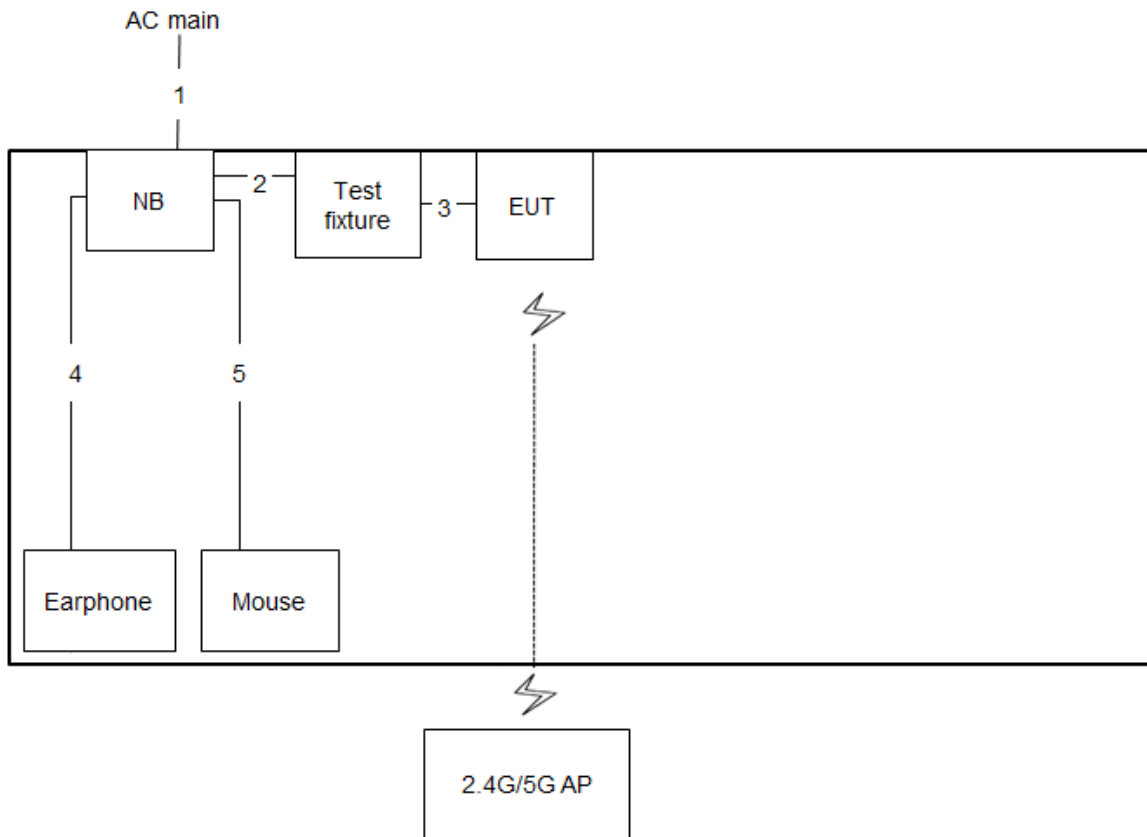

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	USB cable	Yes	0.2m
3	Bus cable	No	0.1m
4	Audio cable	No	1.4m
5	USB cable	Yes	1.8m

Test Configuration: above 1GHz

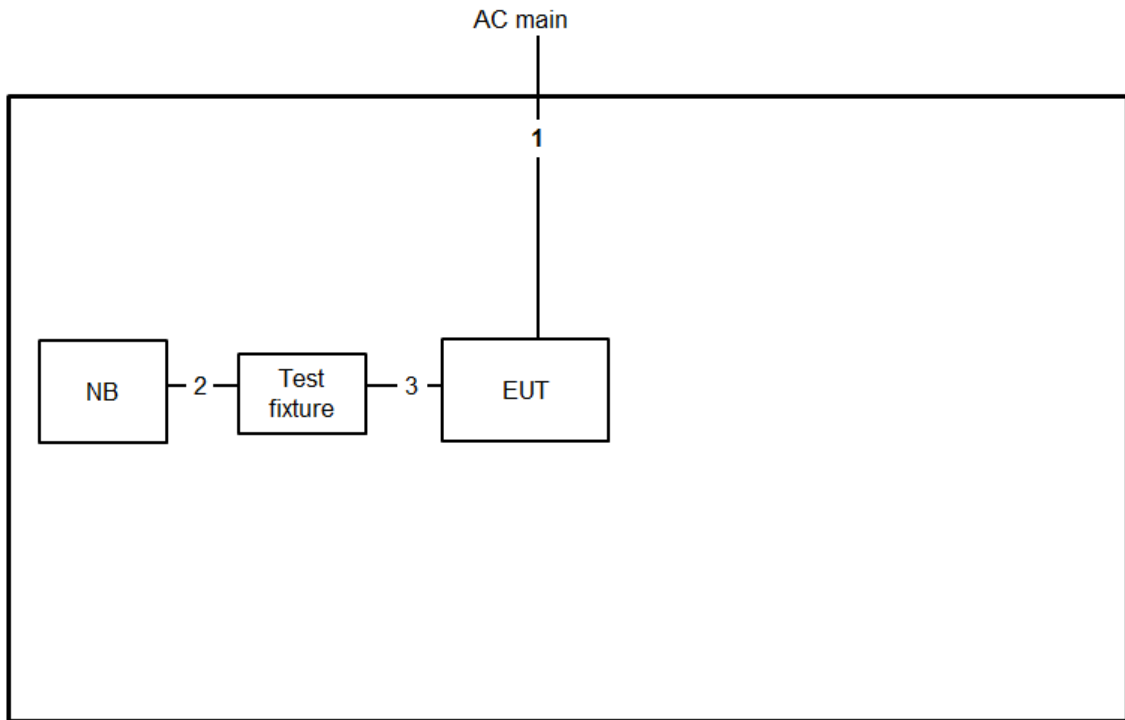

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	USB cable	Yes	0.2m
3	Bus cable	No	0.1m



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

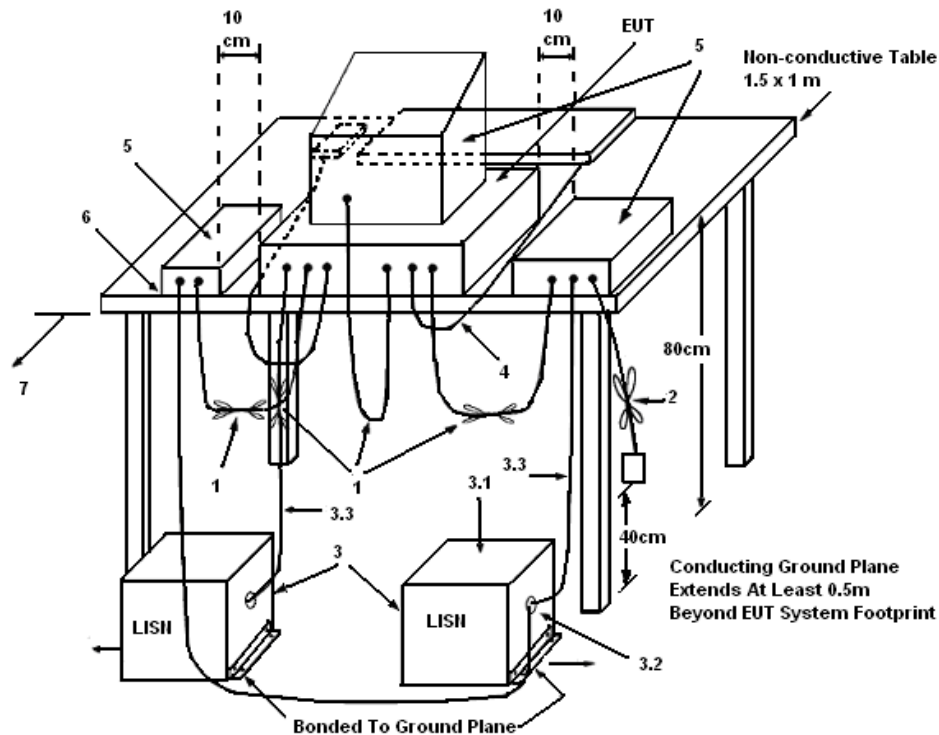

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	60%
Test Engineer	GN Hou	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

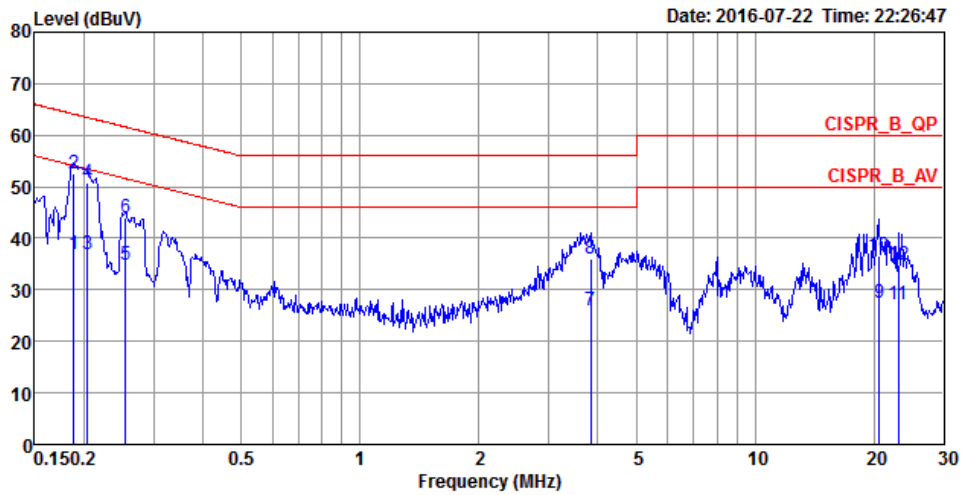

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1884	36.86	-17.25	54.11	26.76	9.92	0.18	LINE	Average
2	0.1884	52.53	-11.58	64.11	42.43	9.92	0.18	LINE	QP
3	0.2040	36.80	-16.65	53.45	26.70	9.92	0.18	LINE	Average
4	0.2040	50.63	-12.82	63.45	40.53	9.92	0.18	LINE	QP
5	0.2548	34.90	-16.70	51.60	24.85	9.92	0.13	LINE	Average
6	0.2548	44.05	-17.55	61.60	34.00	9.92	0.13	LINE	QP
7	3.8399	25.97	-20.03	46.00	15.89	9.99	0.09	LINE	Average
8	3.8399	36.08	-19.92	56.00	26.00	9.99	0.09	LINE	QP
9	20.5944	27.38	-22.62	50.00	16.82	10.32	0.24	LINE	Average
10	20.5944	36.63	-23.37	60.00	26.07	10.32	0.24	LINE	QP
11	23.0181	27.02	-22.98	50.00	16.37	10.39	0.26	LINE	Average
12	23.0181	34.78	-25.22	60.00	24.13	10.39	0.26	LINE	QP

Temperature	22°C	Humidity	60%
Test Engineer	GN Hou	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

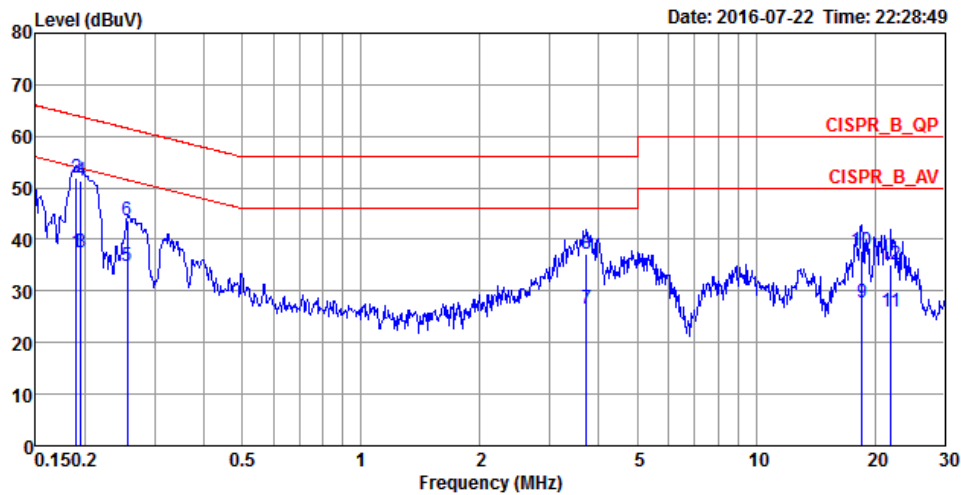

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1904	37.46	-16.56	54.02	27.35	9.92	0.19	NEUTRAL	Average
2	0.1904	52.09	-11.93	64.02	41.98	9.92	0.19	NEUTRAL	QP
3	0.1955	37.59	-16.21	53.80	27.48	9.92	0.19	NEUTRAL	Average
4	0.1955	51.37	-12.43	63.80	41.26	9.92	0.19	NEUTRAL	QP
5	0.2562	34.82	-16.74	51.56	24.77	9.92	0.13	NEUTRAL	Average
6	0.2562	43.59	-17.97	61.56	33.54	9.92	0.13	NEUTRAL	QP
7	3.7198	26.54	-19.46	46.00	16.46	9.99	0.09	NEUTRAL	Average
8	3.7198	37.23	-18.77	56.00	27.15	9.99	0.09	NEUTRAL	QP
9	18.5237	27.89	-22.11	50.00	17.37	10.29	0.23	NEUTRAL	Average
10	18.5237	37.67	-22.33	60.00	27.15	10.29	0.23	NEUTRAL	QP
11	21.9463	26.10	-23.90	50.00	15.49	10.36	0.25	NEUTRAL	Average
12	21.9463	35.19	-24.81	60.00	24.58	10.36	0.25	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	24°C	Humidity	51%
Test Engineer	Paul Chen		

##### For PIFA Ant.


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	20.44	16.85
	5200 MHz	20.00	16.76
	5240 MHz	20.09	16.85
	5745 MHz	27.48	17.02
	5785 MHz	28.87	17.19
	5825 MHz	25.57	16.93
802.11n MCS0 HT20	5180 MHz	20.35	17.71
	5200 MHz	20.35	17.80
	5240 MHz	20.26	17.71
	5745 MHz	28.09	17.97
	5785 MHz	27.39	17.97
	5825 MHz	23.74	17.80

##### For Dipole Ant.


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	20.44	16.85
	5200 MHz	20.00	16.76
	5240 MHz	20.09	16.85
	5745 MHz	27.48	17.02
	5785 MHz	28.87	17.19
	5825 MHz	25.57	16.93
802.11n MCS0 HT20	5180 MHz	20.35	17.71
	5200 MHz	20.35	17.80
	5240 MHz	20.26	17.71
	5745 MHz	28.09	17.97
	5785 MHz	27.39	17.97
	5825 MHz	23.74	17.80

For PIFA Ant.

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5180 MHz

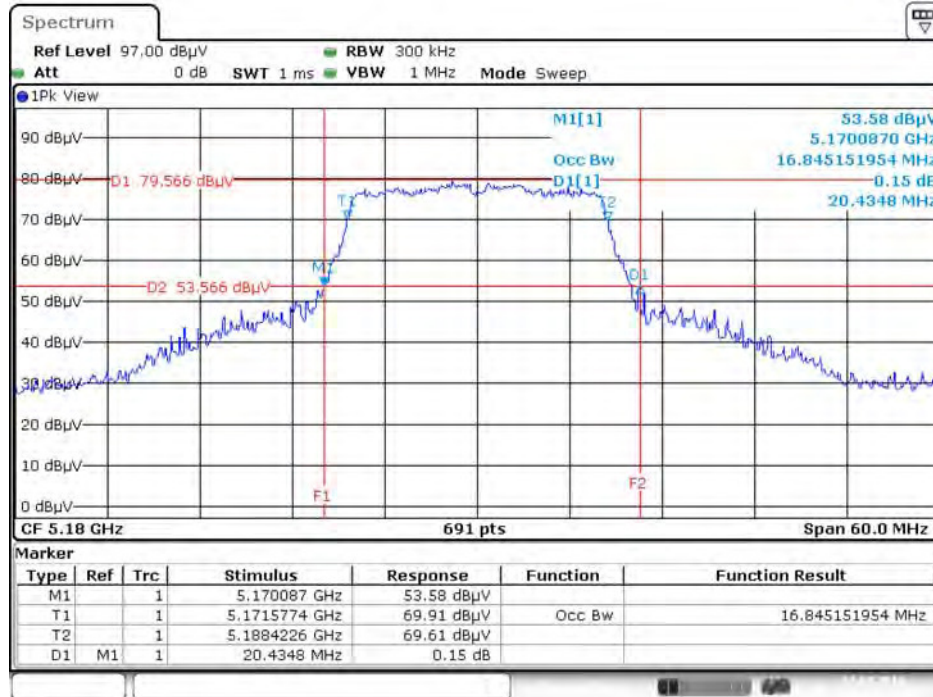


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5200 MHz

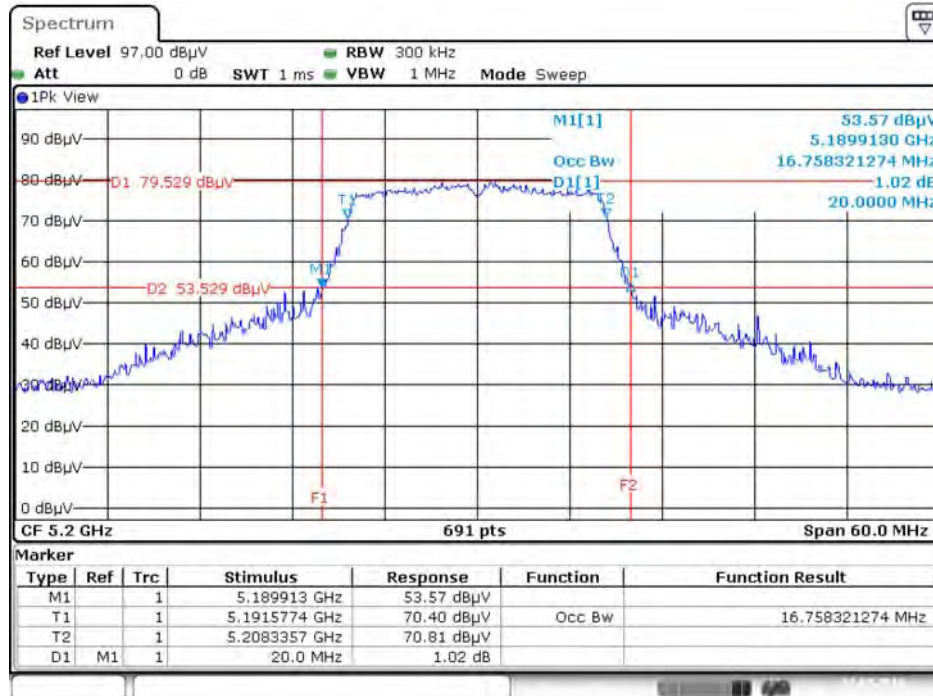




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5240 MHz

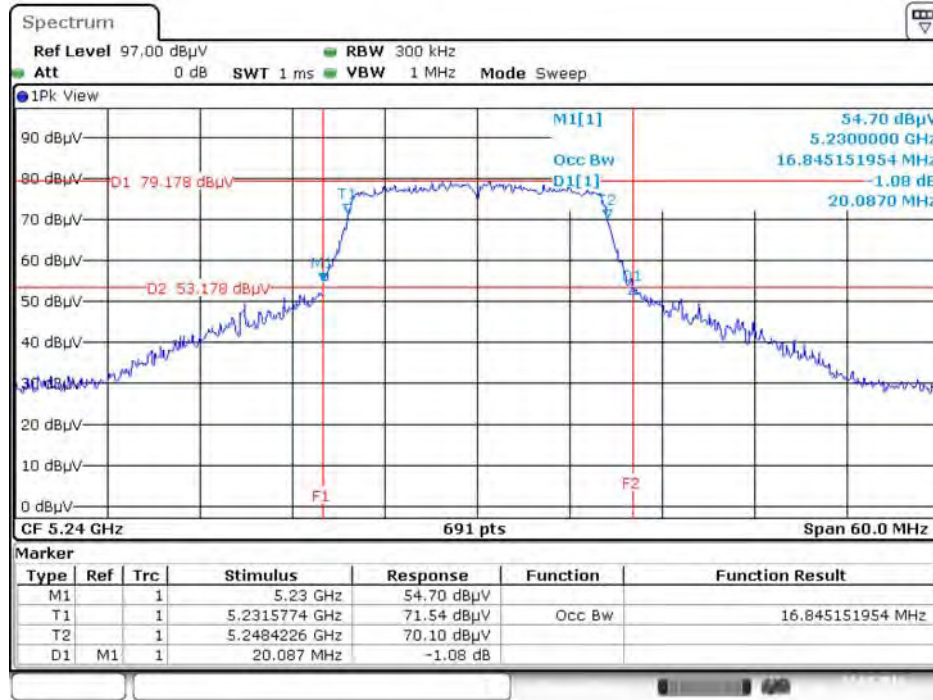

Date: 23.JUL.2016 15:52:42


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5745 MHz

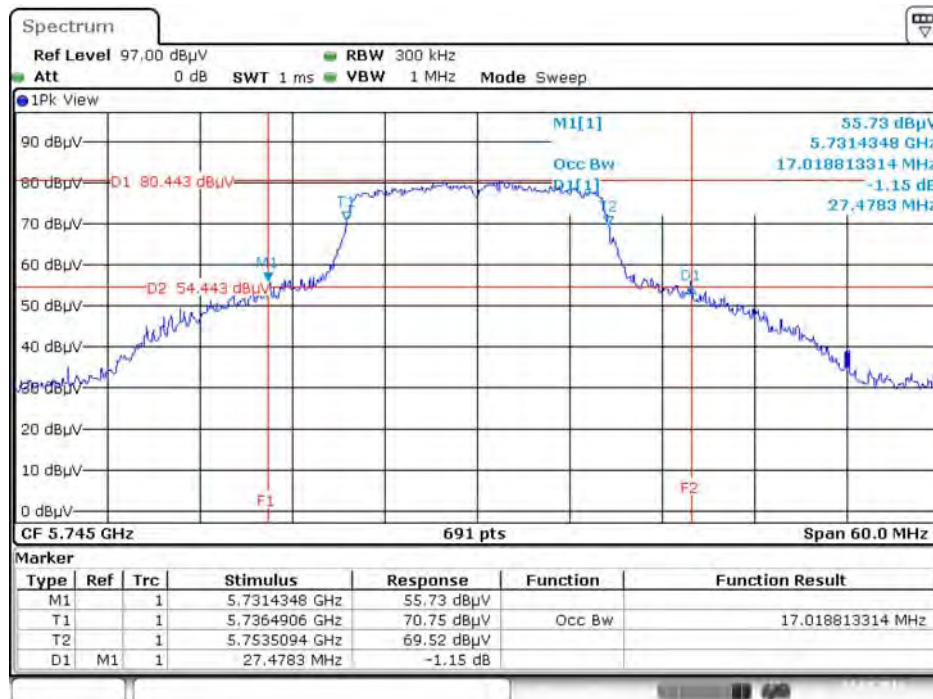

Date: 23.JUL.2016 15:51:21




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5785 MHz

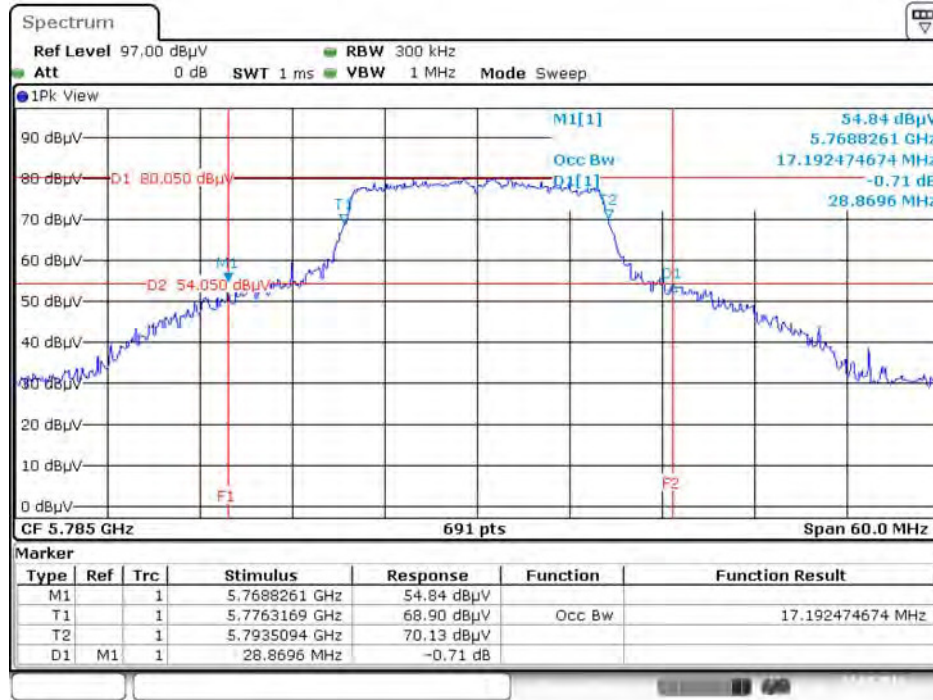


Date: 23.JUL.2016 15:50:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5825 MHz

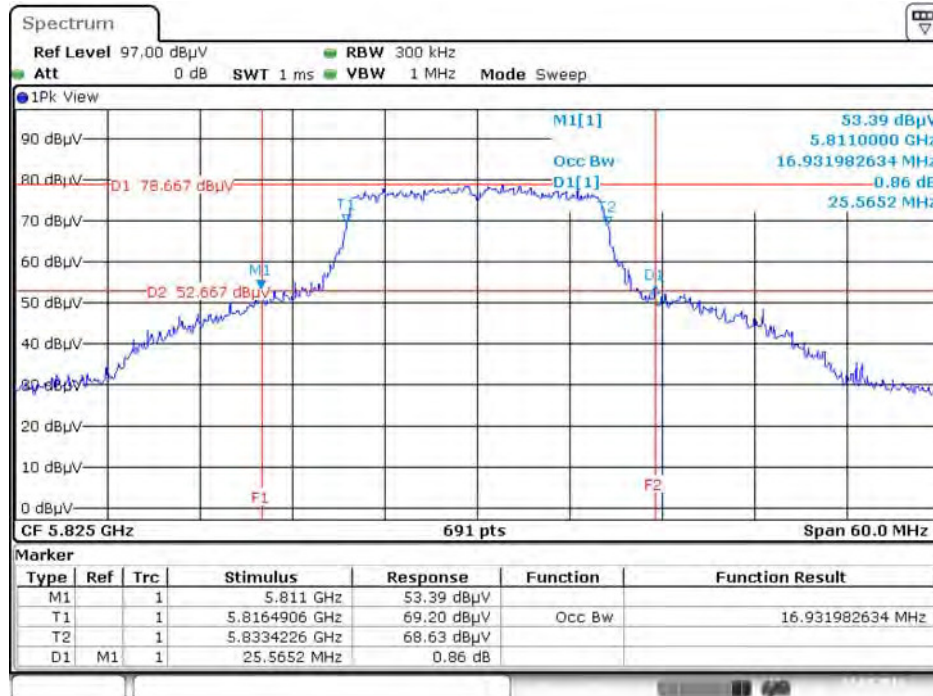


Date: 23.JUL.2016 15:50:30


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5180 MHz

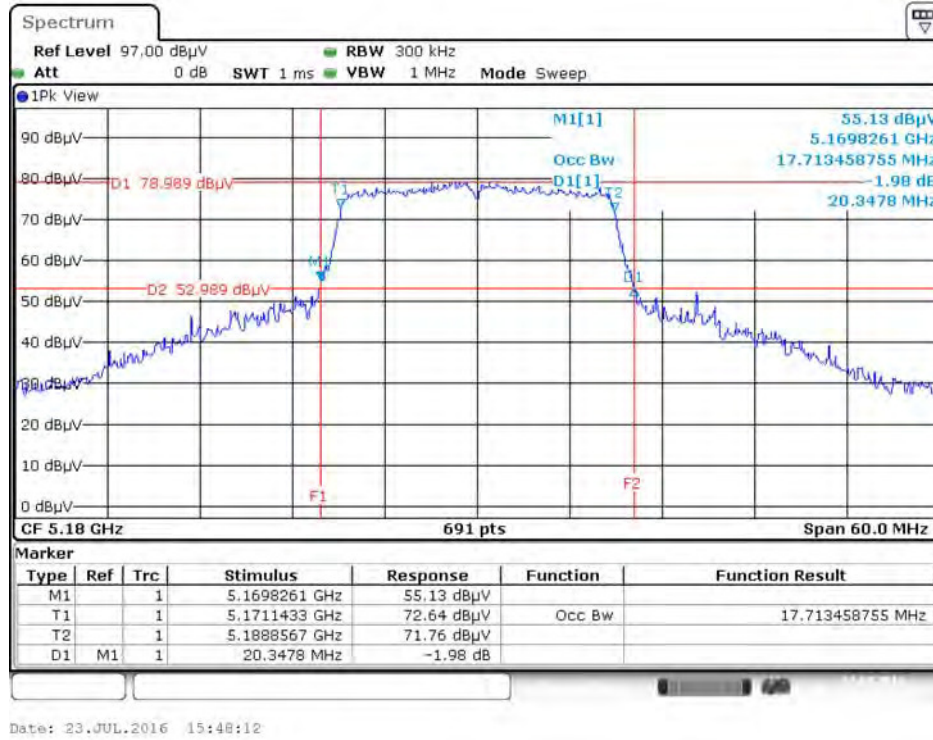

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5200 MHz

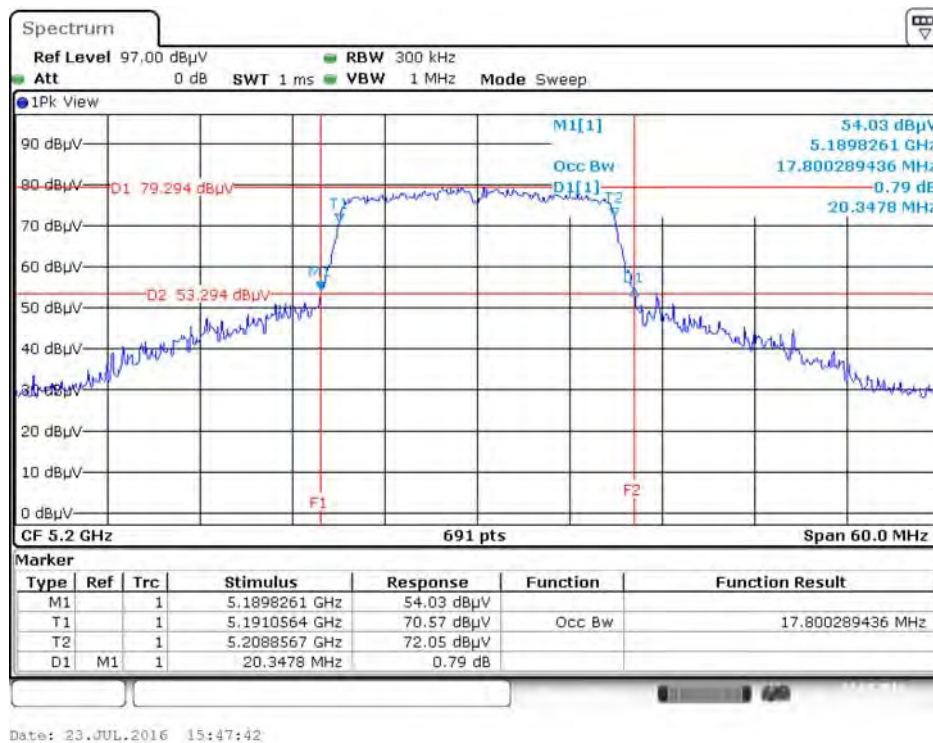


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5240 MHz

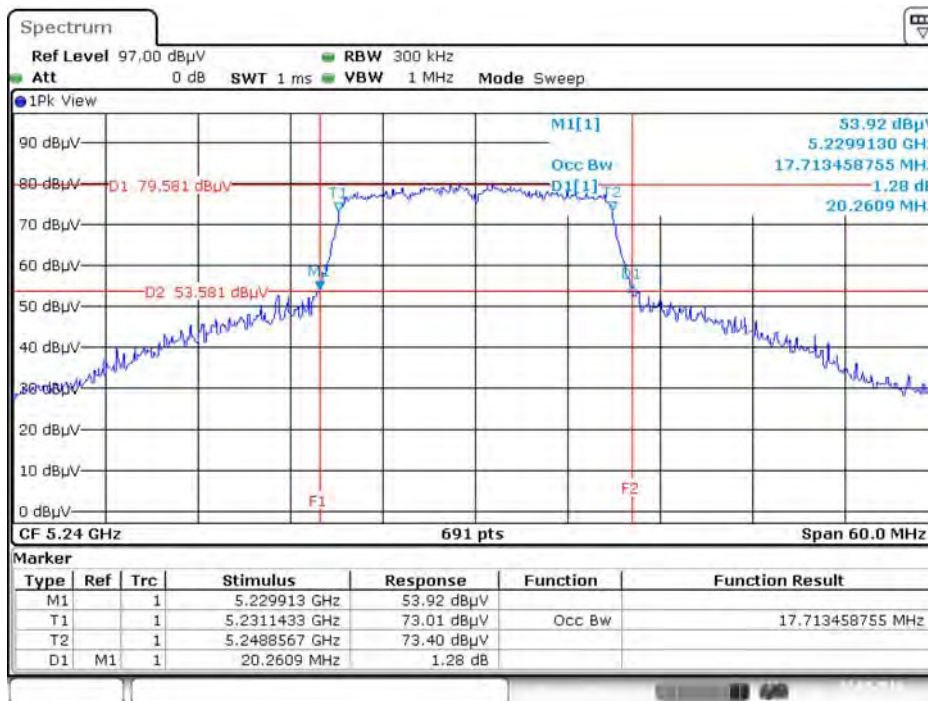

Date: 23.JUL.2016 15:46:21


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5745 MHz

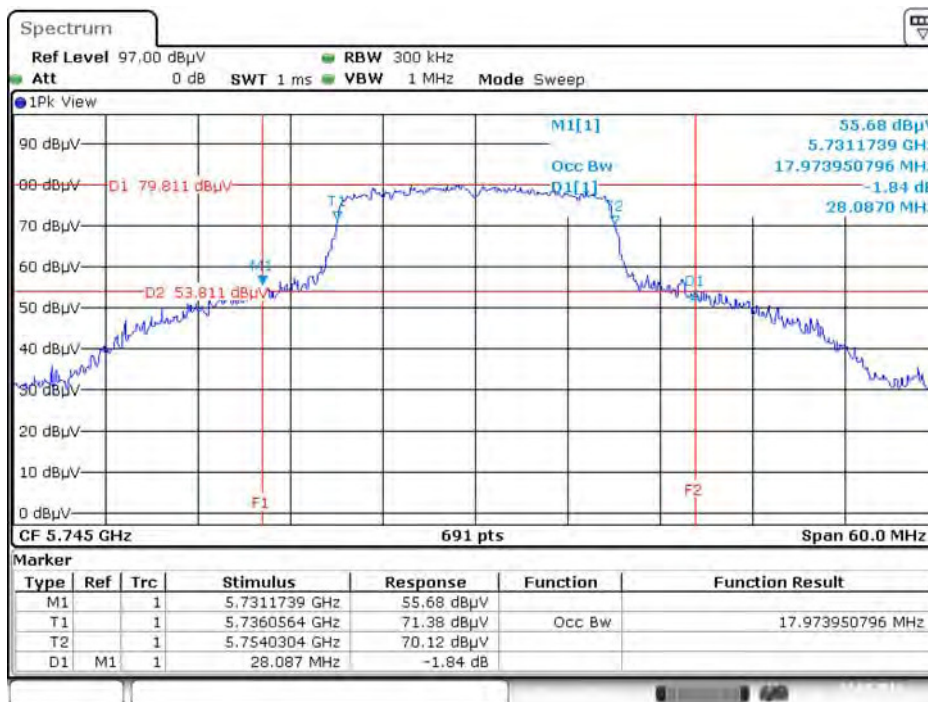


Date: 23.JUL.2016 15:48:58



26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5785 MHz

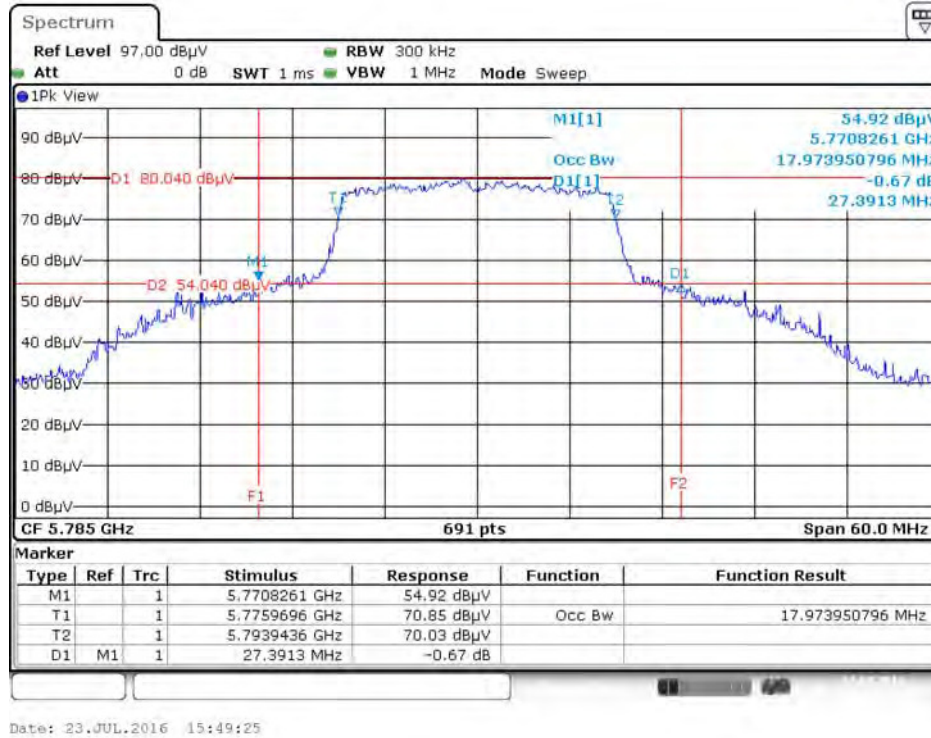


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5825 MHz

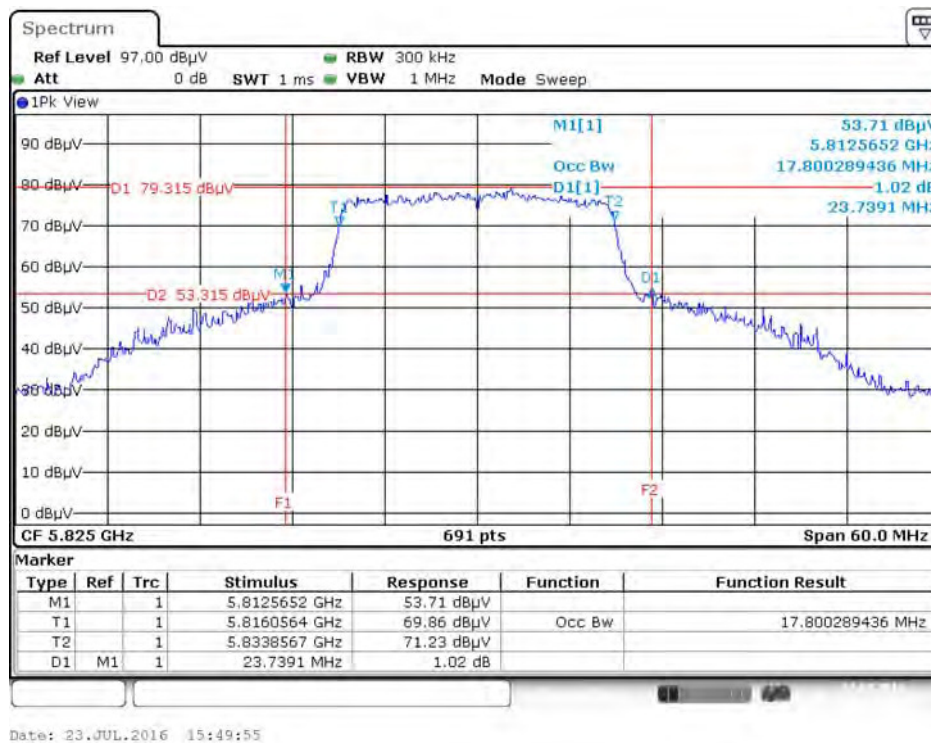


For Dipole Ant.

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5180 MHz

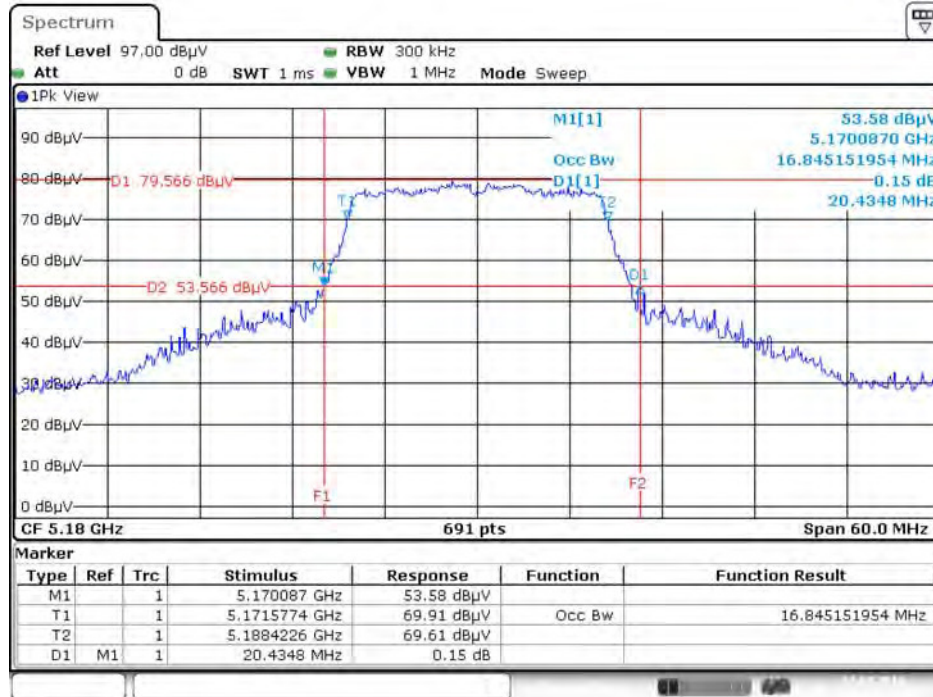


Date: 23.JUL.2016 15:51:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5200 MHz

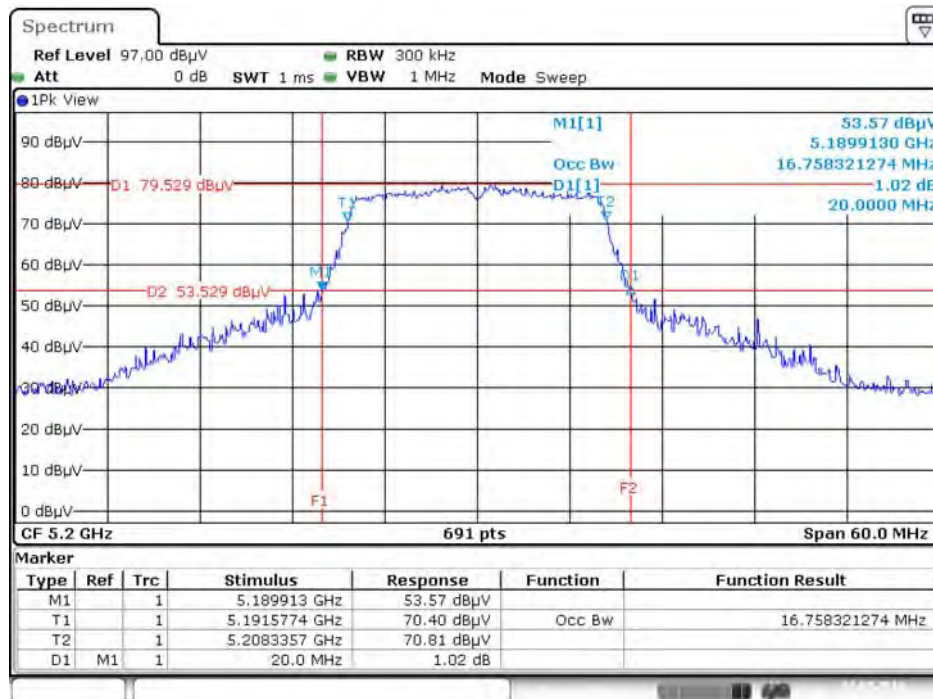


Date: 23.JUL.2016 15:52:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5240 MHz

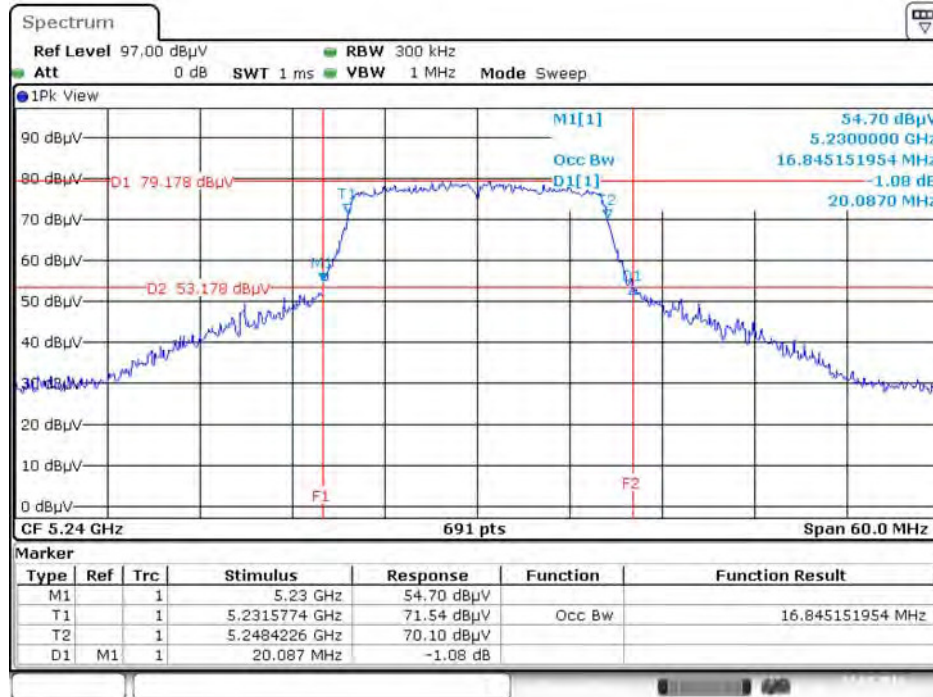

Date: 23.JUL.2016 15:52:42


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5745 MHz

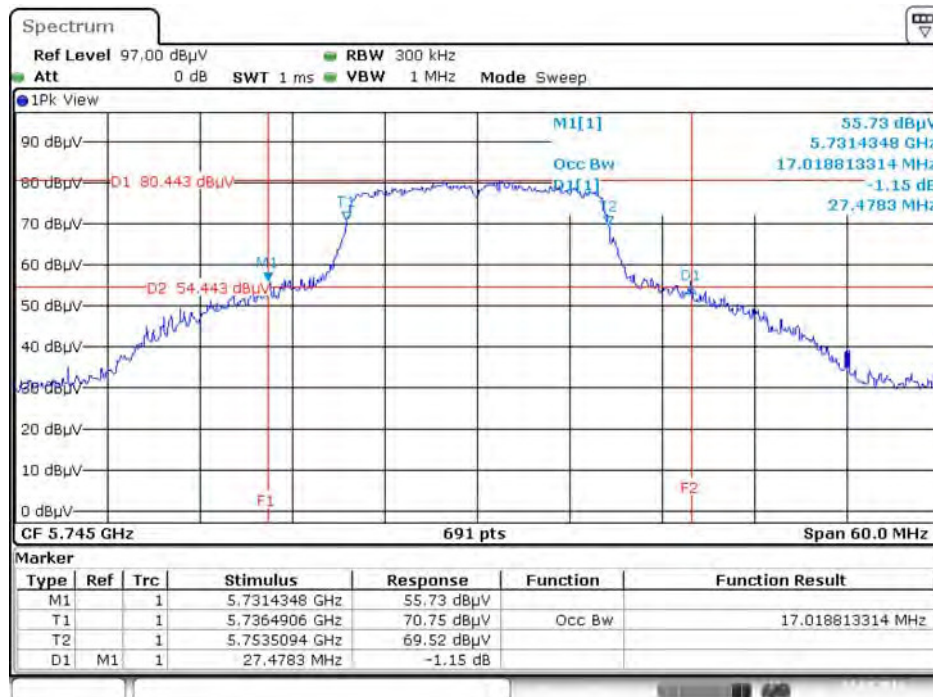

Date: 23.JUL.2016 15:51:21




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5785 MHz

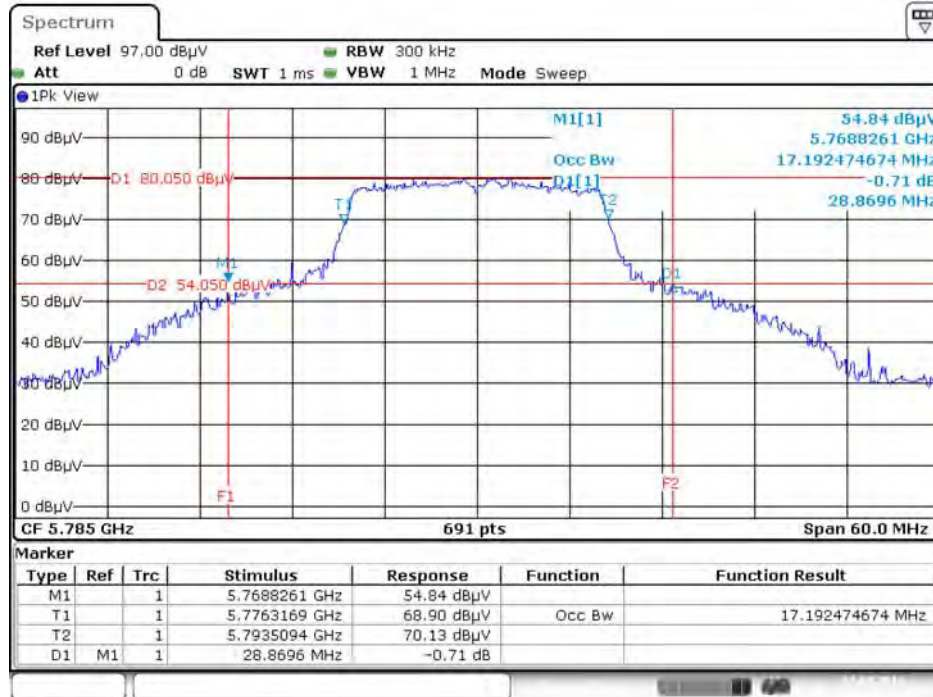


Date: 23.JUL.2016 15:50:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5825 MHz

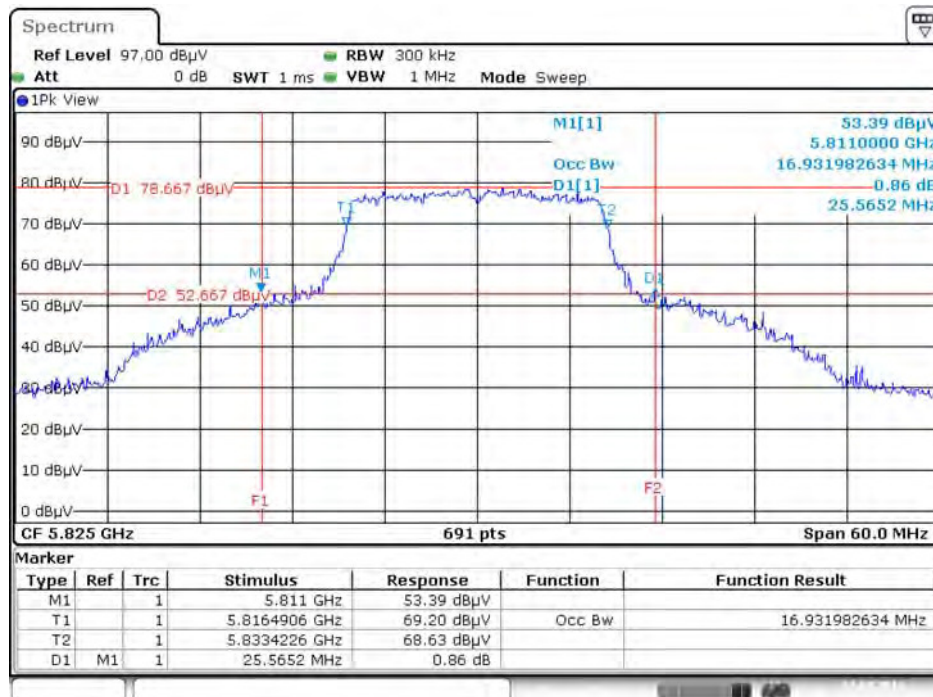


Date: 23.JUL.2016 15:50:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5180 MHz

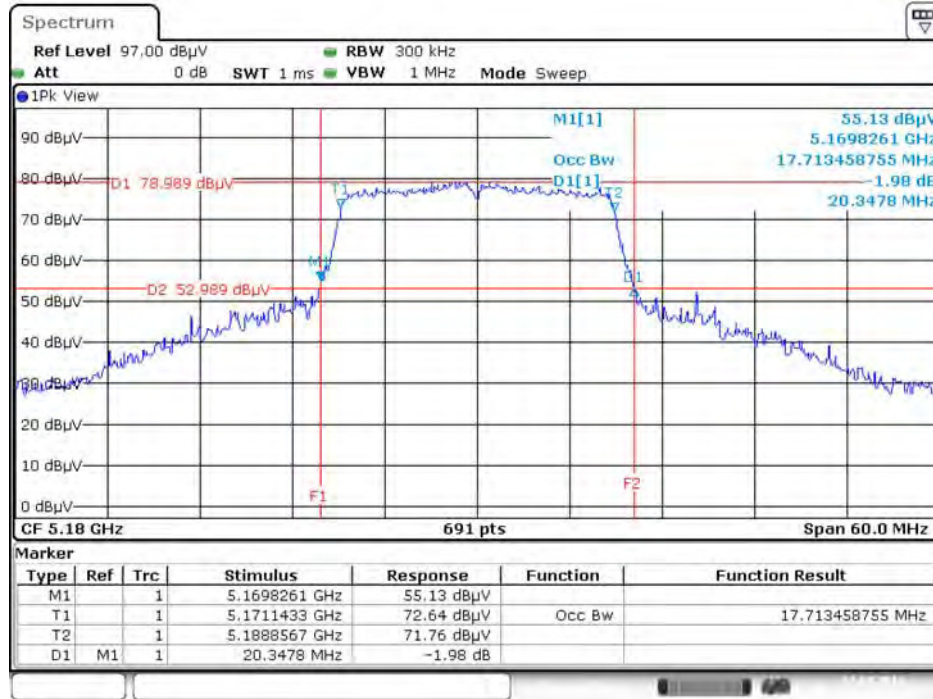

Date: 23.JUL.2016 15:48:12


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5200 MHz

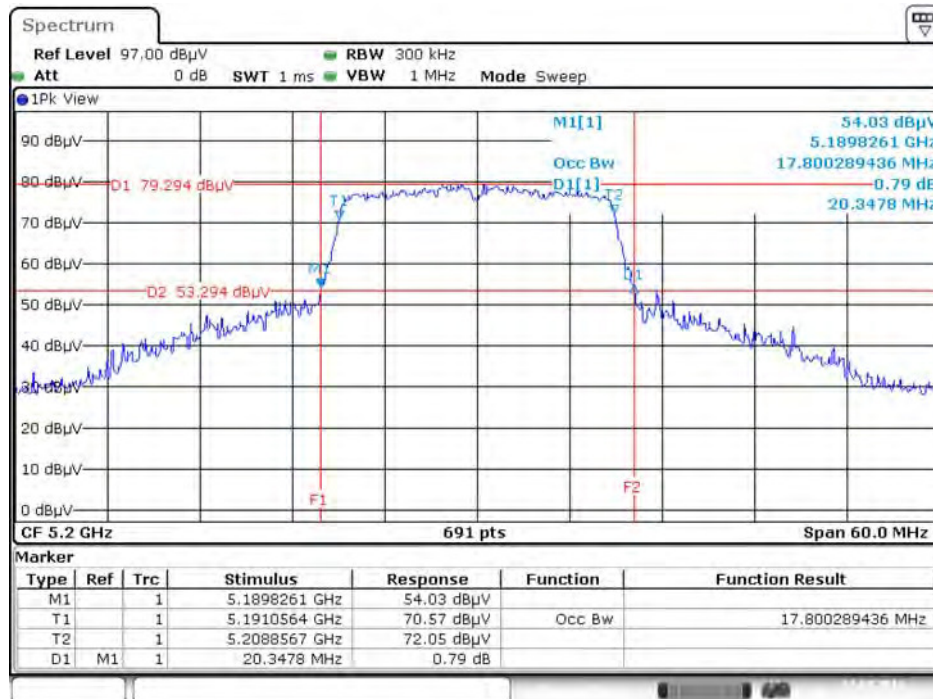

Date: 23.JUL.2016 15:47:42




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5240 MHz

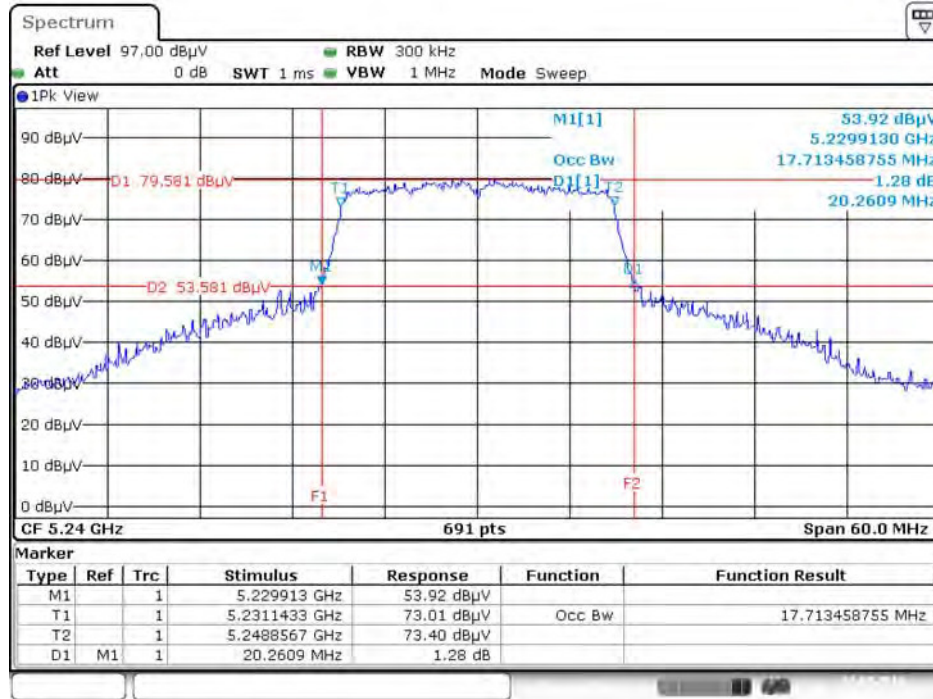


Date: 23.JUL.2016 15:46:21

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5745 MHz

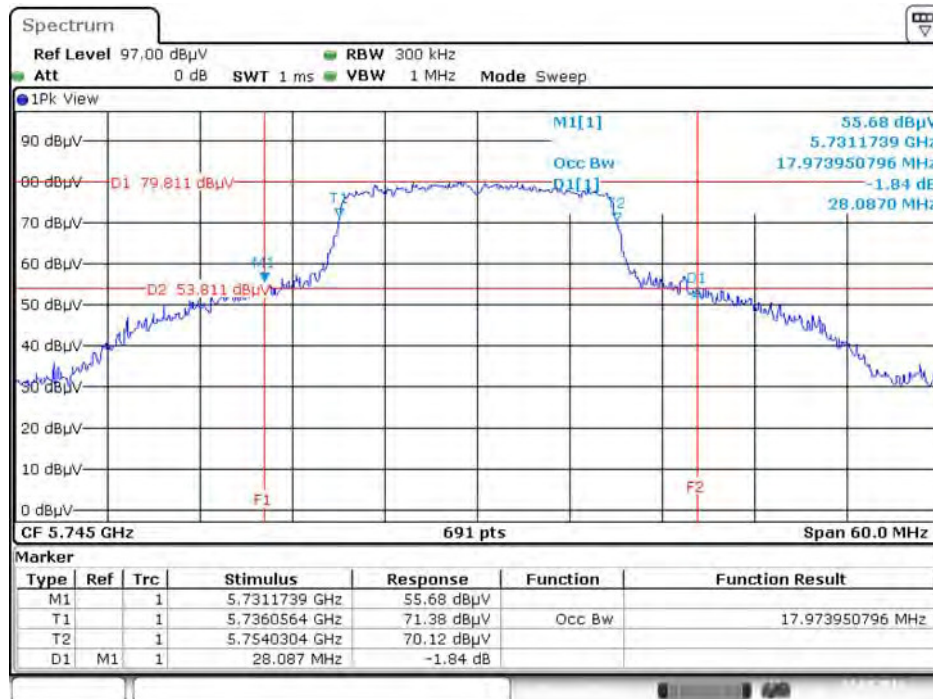


Date: 23.JUL.2016 15:48:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5785 MHz

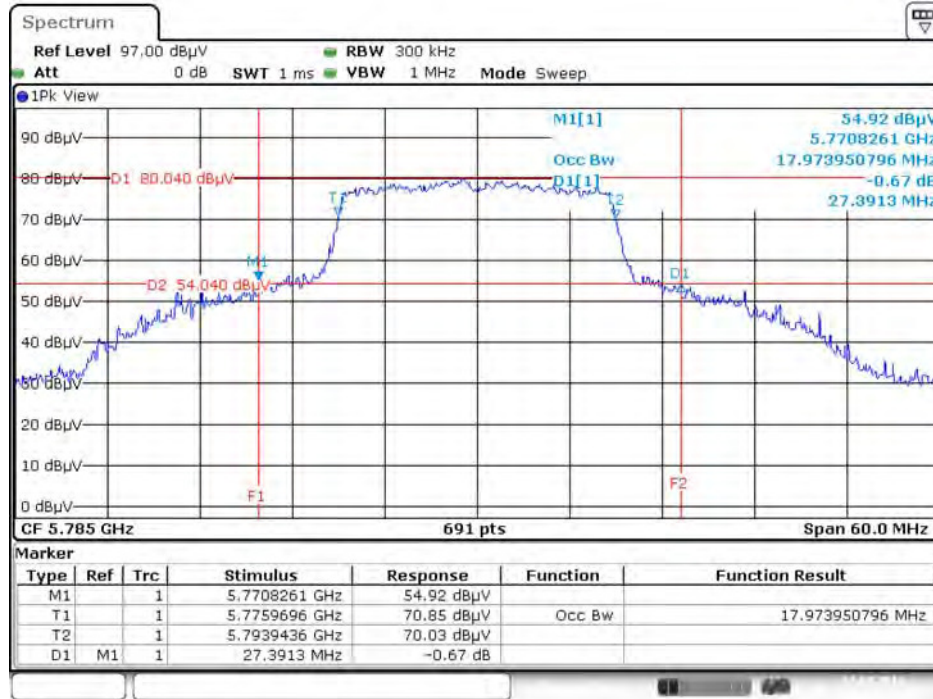

Date: 23.JUL.2016 15:49:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5825 MHz

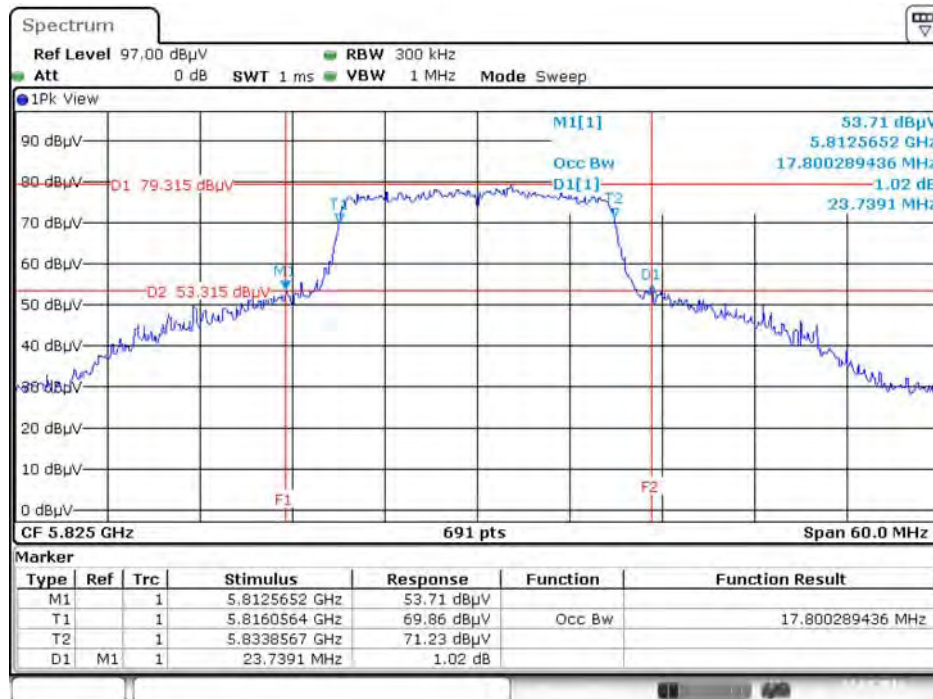

Date: 23.JUL.2016 15:49:55

### 4.3. 6dB Spectrum Bandwidth Measurement

#### 4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	24°C	<b>Humidity</b>	51%
<b>Test Engineer</b>	Paul Chen		

##### For PIFA Ant.

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.29	500	Complies
	5785 MHz	16.35	500	Complies
	5825 MHz	16.23	500	Complies
802.11n MCS0 HT20	5745 MHz	17.16	500	Complies
	5785 MHz	16.87	500	Complies
	5825 MHz	16.52	500	Complies

##### For Dipole Ant.

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.29	500	Complies
	5785 MHz	16.35	500	Complies
	5825 MHz	16.23	500	Complies
802.11n MCS0 HT20	5745 MHz	17.16	500	Complies
	5785 MHz	16.87	500	Complies
	5825 MHz	16.52	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




For PIFA Ant.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5825 MHz

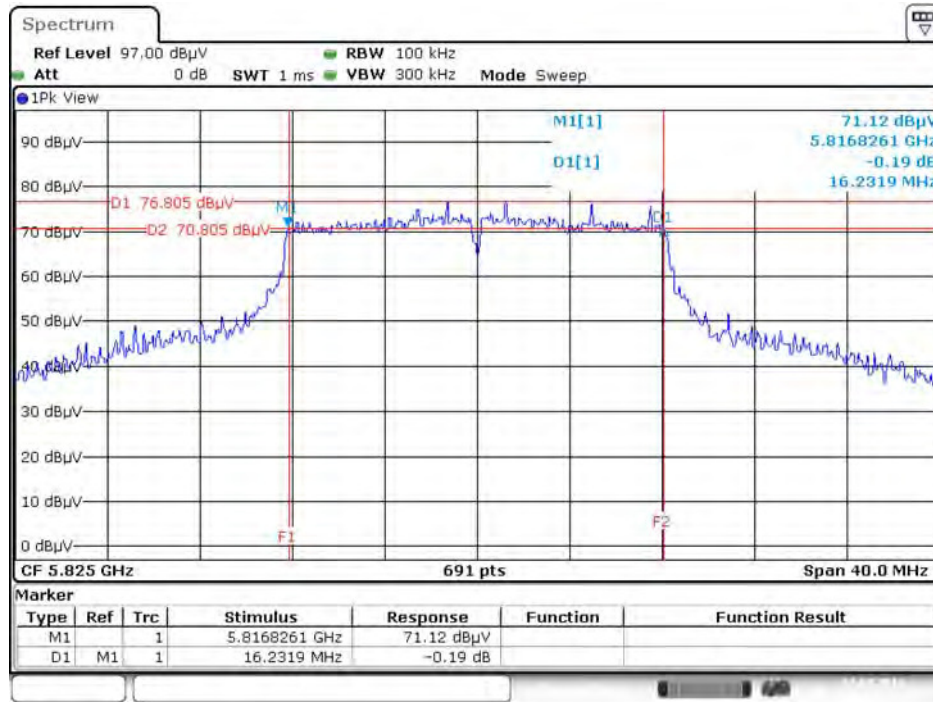

Date: 23.JUL.2016 15:54:51


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5825 MHz

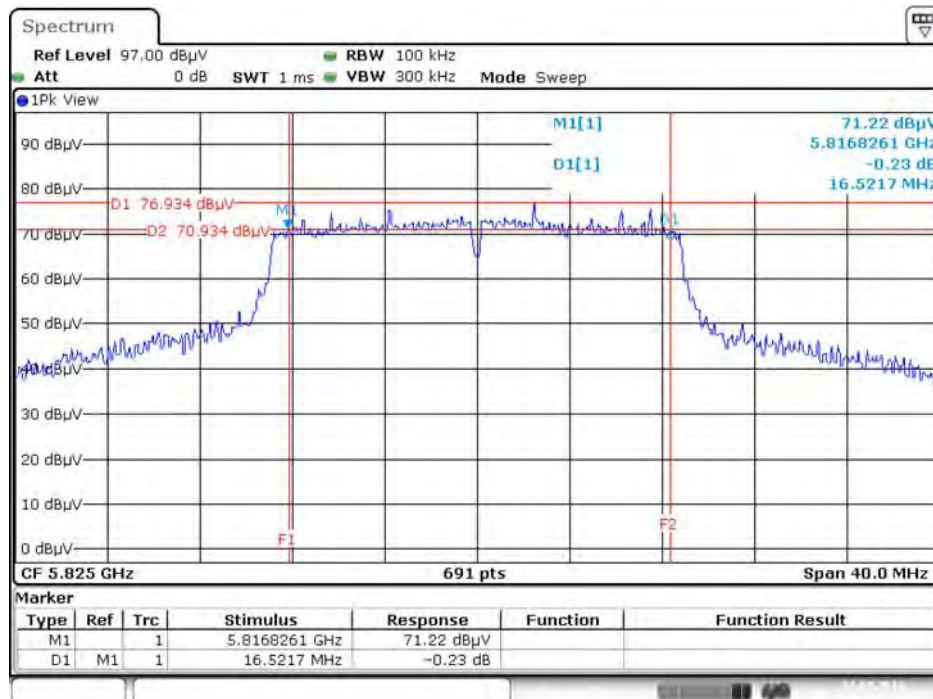

Date: 23.JUL.2016 15:55:14


For Dipole Ant.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 2 / 5825 MHz

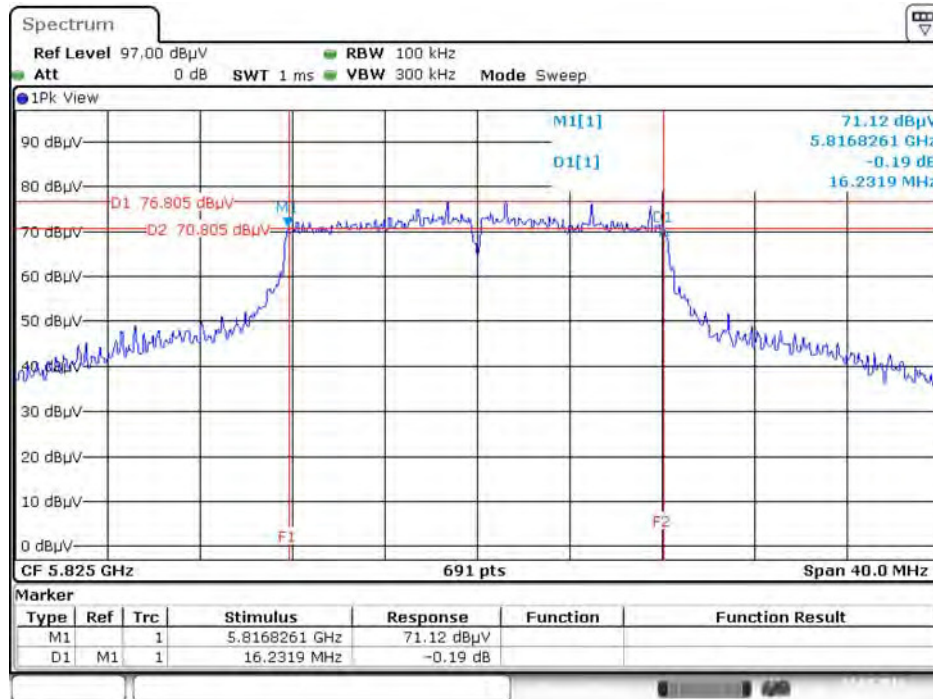

Date: 23.JUL.2016 15:54:51

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5825 MHz

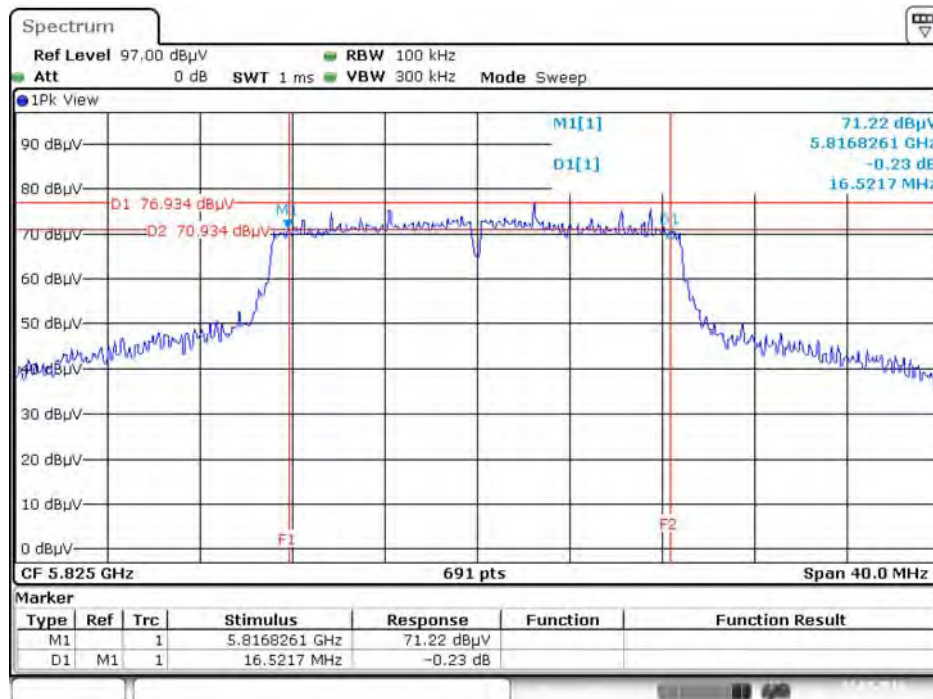

Date: 23.JUL.2016 15:55:14

## 4.4. Maximum Conducted Output Power Measurement

### 4.4.1. Limit

Frequency Band	Limit
<input type="checkbox"/> 5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p>
<input type="checkbox"/> Indoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<input type="checkbox"/> Fixed point-to-point access points	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p>
<input checked="" type="checkbox"/> Client devices	<p>The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>



☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
---	----------------	--

#### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	AVERAGE

#### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems,add every result of the values by mathematic formula.

#### 4.4.4. Test Setup Layout



#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	51%
Test Engineer	Paul Chen	Test Date	Jul. 23, 2016

##### For PIFA Ant.

Mode	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 2		
802.11a	5180 MHz	14.54	23.98	Complies
	5200 MHz	14.94	23.98	Complies
	5240 MHz	15.05	23.98	Complies
	5745 MHz	15.14	30.00	Complies
	5785 MHz	14.93	30.00	Complies
	5825 MHz	14.71	30.00	Complies
802.11n MCS0 HT20	5180 MHz	14.52	23.98	Complies
	5200 MHz	14.85	23.98	Complies
	5240 MHz	14.93	23.98	Complies
	5745 MHz	15.53	30.00	Complies
	5785 MHz	14.86	30.00	Complies
	5825 MHz	14.49	30.00	Complies

##### For Dipole Ant.

Mode	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 2		
802.11a	5180 MHz	14.54	23.49	Complies
	5200 MHz	14.94	23.49	Complies
	5240 MHz	15.05	23.49	Complies
	5745 MHz	15.14	29.51	Complies
	5785 MHz	14.93	29.51	Complies
	5825 MHz	14.71	29.51	Complies
802.11n MCS0 HT20	5180 MHz	14.52	23.49	Complies
	5200 MHz	14.85	23.49	Complies
	5240 MHz	14.93	23.49	Complies
	5745 MHz	15.53	29.51	Complies
	5785 MHz	14.86	29.51	Complies
	5825 MHz	14.49	29.51	Complies

Note:

For Band 1: Gain = 6.49dBi > 6dBi, so Limit = 23.98 - (6.49 - 6) = 23.49 dBm

For Band 4: Gain = 6.49dBi > 6dBi, so Limit = 30 - (6.49 - 6) = 29.51 dBm

## 4.5. Power Spectral Density Measurement

### 4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input checked="" type="checkbox"/>	Client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

#### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add  $10\log(500\text{kHz}/\text{RBW})$  and the final result should  $\leq 30$  dBm.

#### 4.5.4. Test Setup Layout

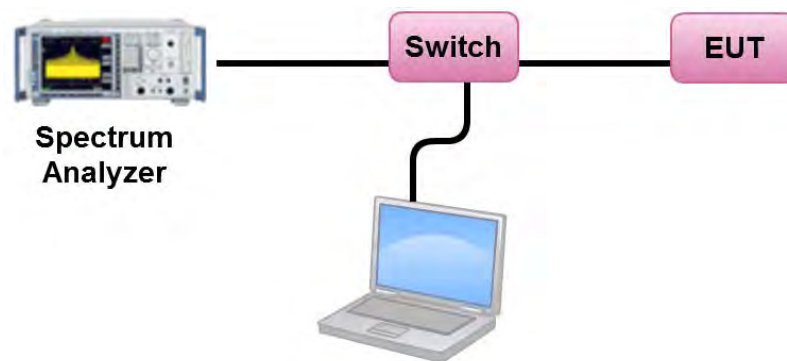

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	51%
Test Engineer	Paul Chen		

For PIFA Ant.

Configuration IEEE 802.11a / Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.29	11.00	Complies
40	5200 MHz	1.82	11.00	Complies
48	5240 MHz	1.78	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	2.12	-3.01	-0.89	30.00	Complies
157	5785 MHz	1.84	-3.01	-1.17	30.00	Complies
165	5825 MHz	1.59	-3.01	-1.42	30.00	Complies

Configuration IEEE 802.11n MCS0 HT20 / Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.37	11.00	Complies
40	5200 MHz	1.60	11.00	Complies
48	5240 MHz	1.57	11.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	2.23	-3.01	-0.78	30.00	Complies
157	5785 MHz	1.45	-3.01	-1.56	30.00	Complies
165	5825 MHz	1.33	-3.01	-1.68	30.00	Complies

For Dipole Ant.

Configuration IEEE 802.11a / Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.29	10.51	Complies
40	5200 MHz	1.82	10.51	Complies
48	5240 MHz	1.78	10.51	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	2.12	-3.01	-0.89	29.51	Complies
157	5785 MHz	1.84	-3.01	-1.17	29.51	Complies
165	5825 MHz	1.59	-3.01	-1.42	29.51	Complies

Configuration IEEE 802.11n MCS0 HT20 / Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.37	10.51	Complies
40	5200 MHz	1.60	10.51	Complies
48	5240 MHz	1.57	10.51	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	2.23	-3.01	-0.78	29.51	Complies
157	5785 MHz	1.45	-3.01	-1.56	29.51	Complies
165	5825 MHz	1.33	-3.01	-1.68	29.51	Complies

Note:

For Band 1: Gain = 6.49dBi > 6dBi, so Limit = 11 - (6.49 - 6) = 10.51 dBm/MHz

For Band 4: Gain = 6.49dBi > 6dBi, so Limit = 30 - (6.49 - 6) = 29.51 dBm/500kHz


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




For PIFA Ant.


Power Density Plot on Configuration IEEE 802.11a / Chain 2 / 5200 MHz

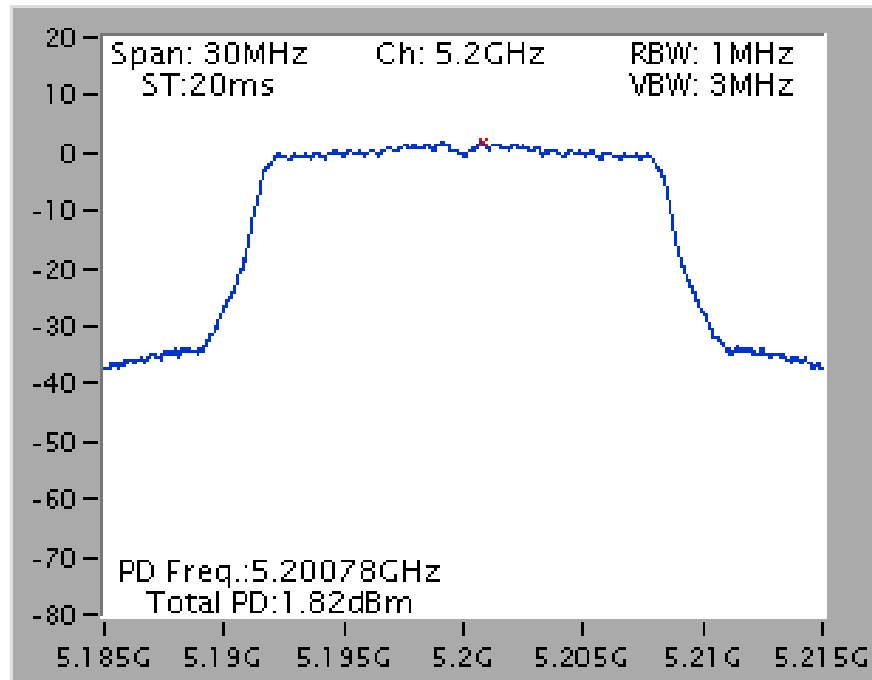


Power Density Plot on Configuration IEEE 802.11a / Chain 2 / 5745 MHz

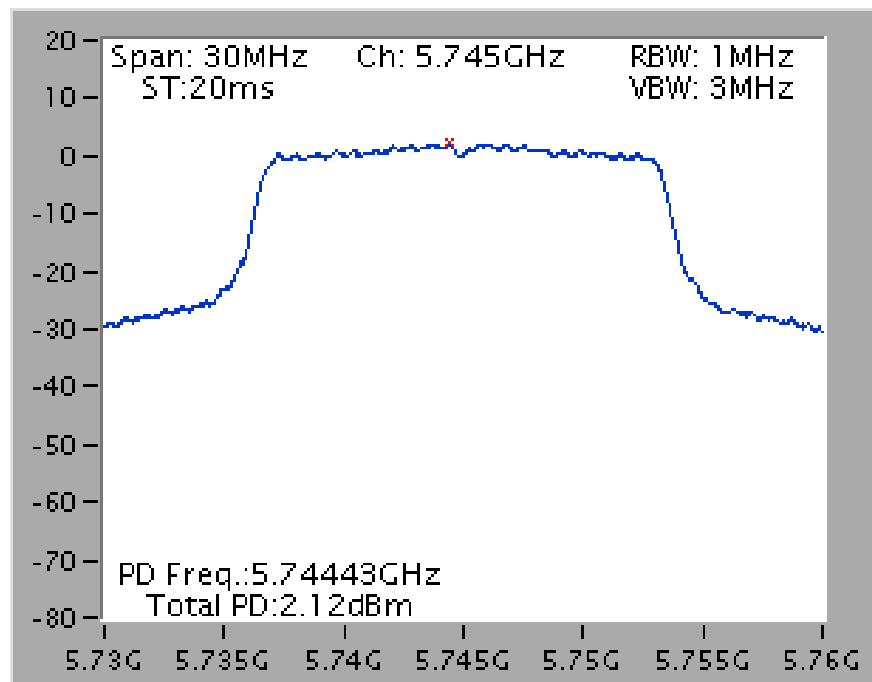

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5200 MHz

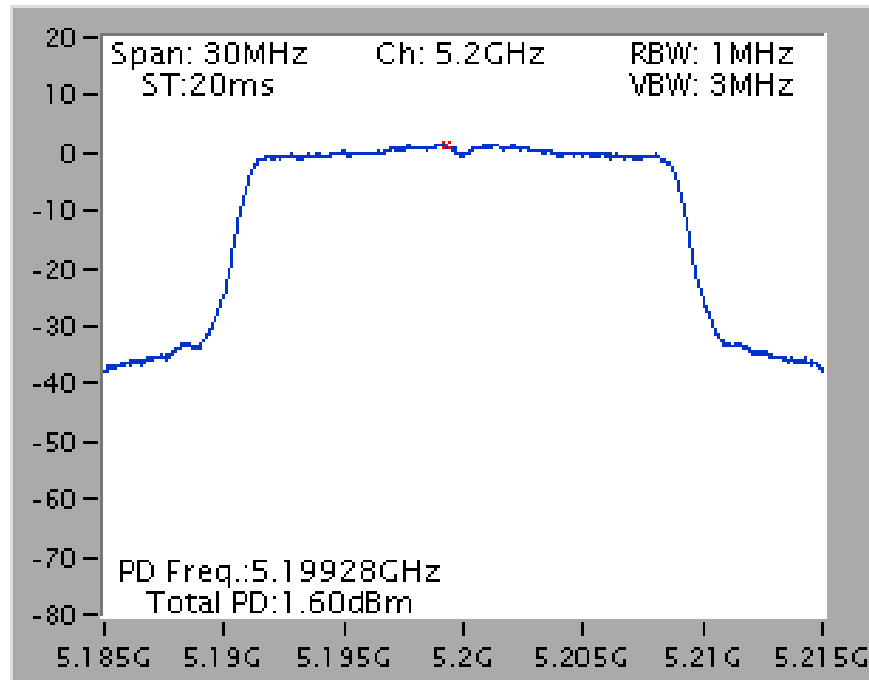


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5745 MHz

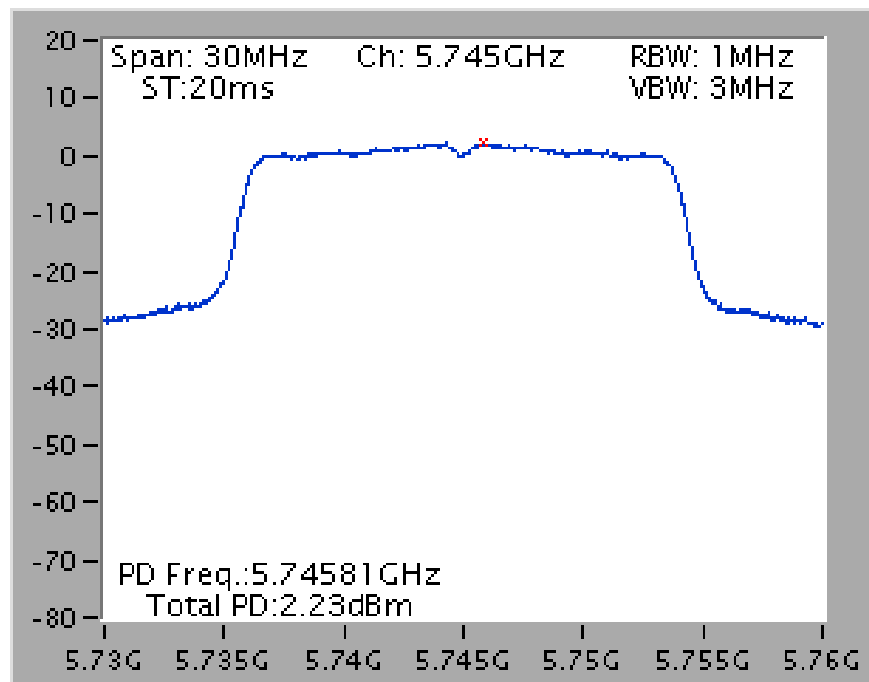


For Dipole Ant.


Power Density Plot on Configuration IEEE 802.11a / Chain 2 / 5200 MHz

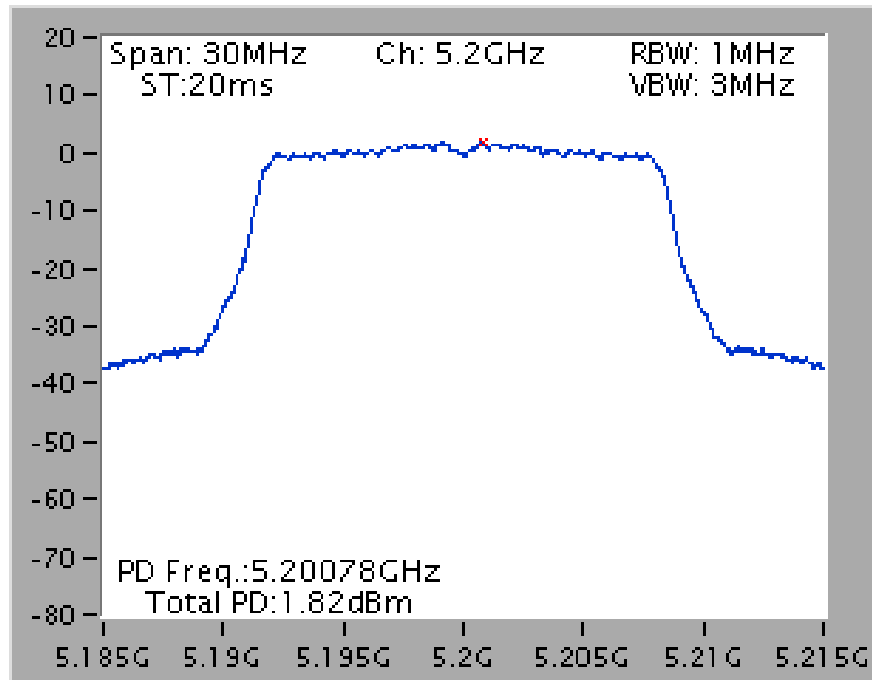


Power Density Plot on Configuration IEEE 802.11a / Chain 2 / 5745 MHz

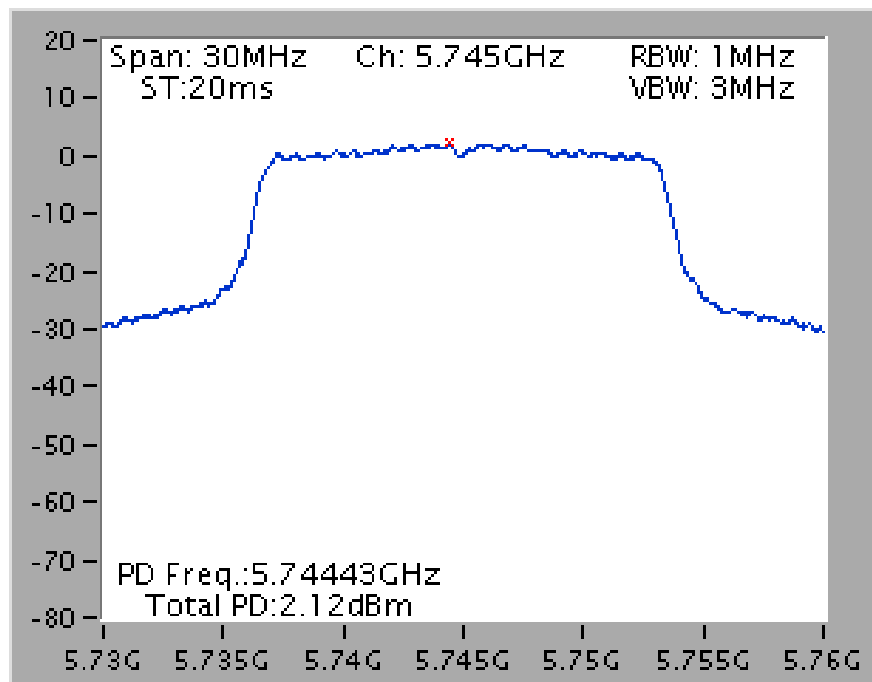

## Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5200 MHz

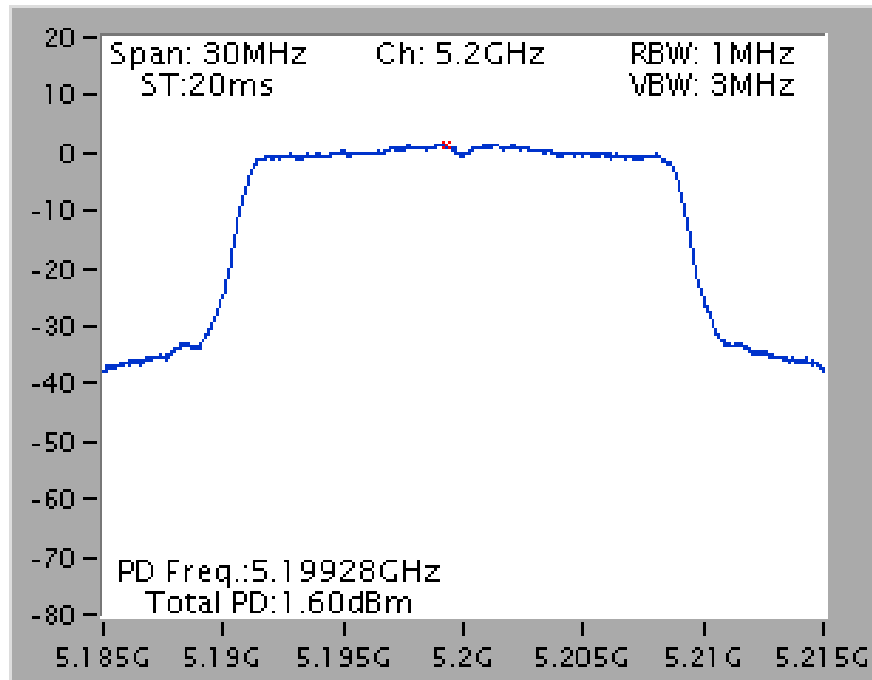

## Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 2 / 5745 MHz

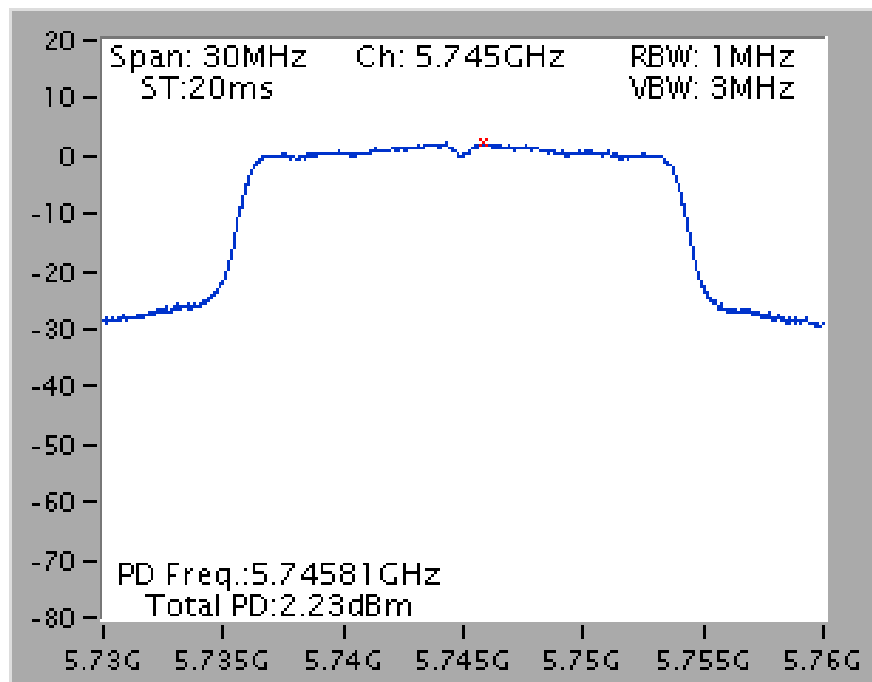

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.25-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP


#### 4.6.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

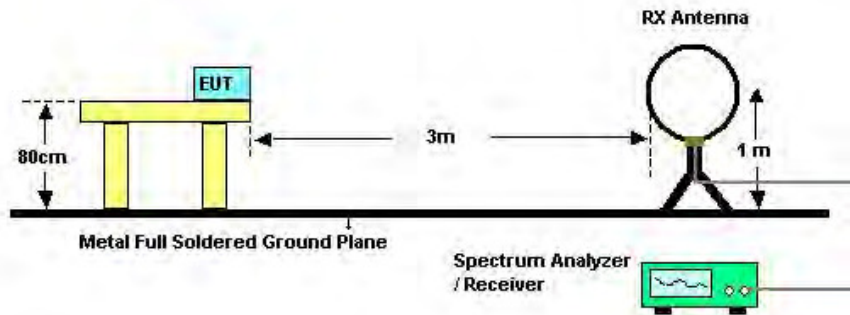

For Radiated Emissions: 30MHz~1GHz

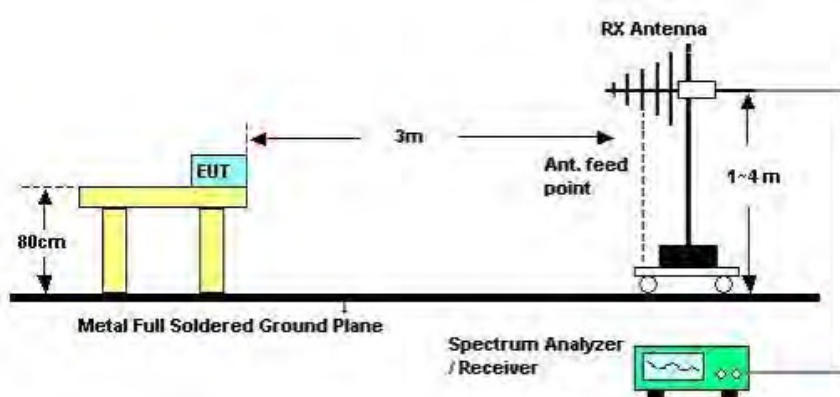

For Radiated Emissions: Above 1GHz

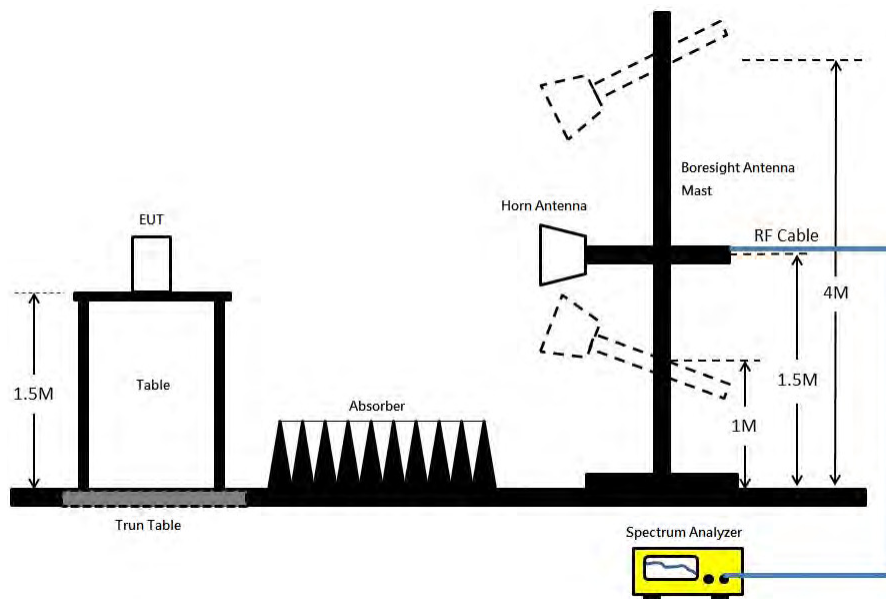

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	Normal Link
Test Date	Jul. 20, 2016	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

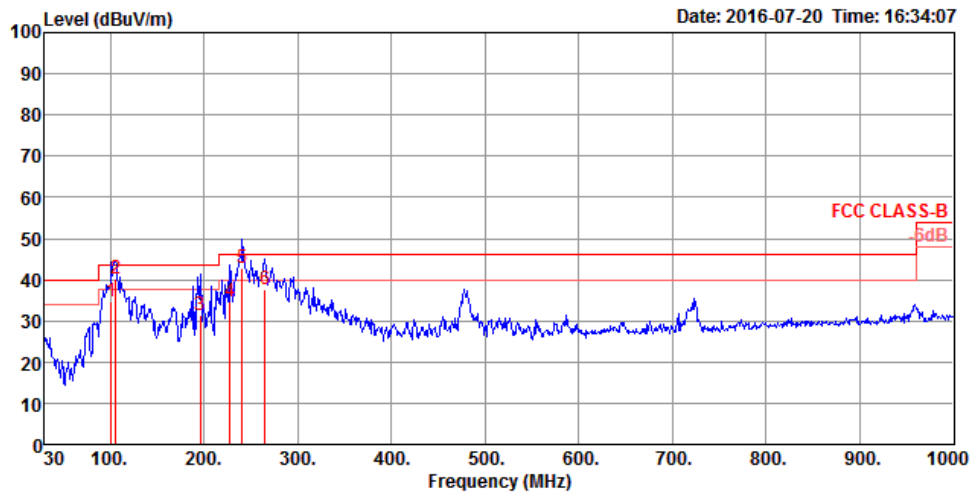

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	100.81	34.80	43.50	-8.70	48.59	0.87	17.73	32.39	200	359	QP	HORIZONTAL
2	105.66	40.24	43.50	-3.26	53.45	0.89	18.29	32.39	200	337	QP	HORIZONTAL
3	195.87	31.30	43.50	-12.20	46.00	1.21	16.42	32.33	200	170	QP	HORIZONTAL
4	227.88	34.84	46.00	-11.16	48.50	1.29	17.36	32.31	100	3	QP	HORIZONTAL
5	240.49	42.68	46.00	-3.32	55.21	1.32	18.46	32.31	200	50	QP	HORIZONTAL
6	264.74	37.54	46.00	-8.46	48.70	1.38	19.76	32.30	125	207	QP	HORIZONTAL

**Vertical**

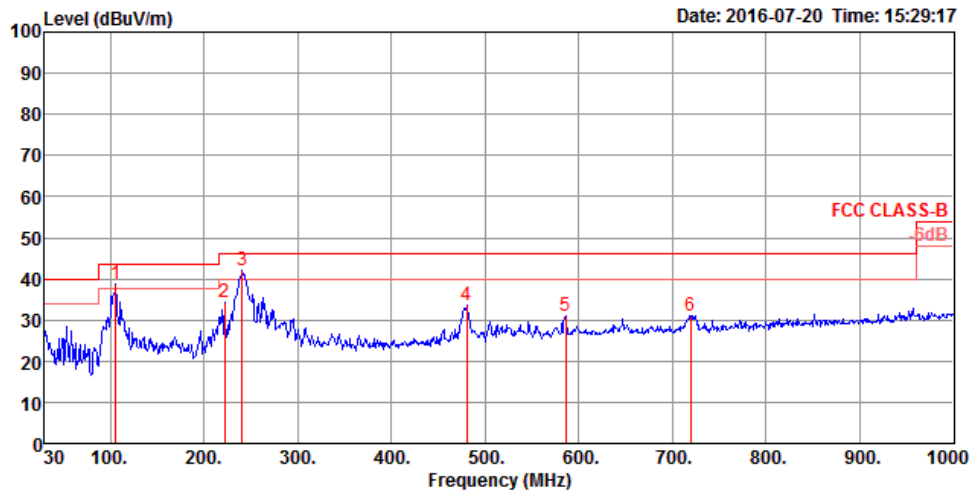

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	105.66	38.72	43.50	-4.78	51.93	0.89	18.29	32.39	200	263 Peak	VERTICAL
2	222.06	34.24	46.00	-11.76	48.24	1.28	17.04	32.32	150	178 Peak	VERTICAL
3	240.49	42.13	46.00	-3.87	54.66	1.32	18.46	32.31	125	190 Peak	VERTICAL
4	480.08	33.43	46.00	-12.57	40.17	1.90	23.71	32.35	200	282 Peak	VERTICAL
5	585.81	31.01	46.00	-14.99	36.09	2.09	25.23	32.40	200	276 Peak	VERTICAL
6	719.67	31.16	46.00	-14.84	35.09	2.31	26.10	32.34	125	295 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

For PIFA Ant.

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11a CH 36 / Chain 2
Test Date	Jul. 20, 2016		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15535.30	58.34	74.00	-15.66	42.50	12.53	38.45	35.14	138	195	Peak	HORIZONTAL
2	15541.12	45.16	54.00	-8.84	29.32	12.53	38.45	35.14	138	195	Average	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15537.40	45.32	54.00	-8.68	29.48	12.53	38.45	35.14	186	99	Average	VERTICAL
2	15542.70	58.03	74.00	-15.97	42.19	12.53	38.45	35.14	186	99	Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 40 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15603.32	58.98	74.00	-15.02	43.28	12.55	38.34	35.19	114	344	Peak	HORIZONTAL
2	15604.34	45.70	54.00	-8.30	30.00	12.55	38.34	35.19	114	344	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.98	59.30	74.00	-14.70	43.60	12.55	38.34	35.19	122	254	Peak	VERTICAL
2	15603.54	45.38	54.00	-8.62	29.68	12.55	38.34	35.19	122	254	Average	VERTICAL





<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15721.16	46.06	54.00	-7.94	30.51	12.56	38.23	35.24	170	204	Average	HORIZONTAL
2	15722.54	59.95	74.00	-14.05	44.40	12.56	38.23	35.24	170	204	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15723.16	46.08	54.00	-7.92	30.53	12.56	38.23	35.24	108	343	Average	VERTICAL
2	15724.66	58.85	74.00	-15.15	43.30	12.56	38.23	35.24	108	343	Peak	VERTICAL

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 149 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11486.84	42.98	54.00	-11.02	27.97	10.06	39.70	34.75	203	52 Average	HORIZONTAL
2	11488.62	56.26	74.00	-17.74	41.25	10.06	39.70	34.75	203	52 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11485.50	42.85	54.00	-11.15	27.84	10.06	39.70	34.75	152	150 Average	VERTICAL
2	11487.20	56.00	74.00	-18.00	40.99	10.06	39.70	34.75	152	150 Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 157 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.28	43.07	54.00	-10.93	28.10	10.08	39.65	34.76	110	216	Average	HORIZONTAL
2	11570.22	56.03	74.00	-17.97	41.06	10.08	39.65	34.76	110	216	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.40	56.04	74.00	-17.96	41.07	10.08	39.65	34.76	119	143	Peak	VERTICAL
2	11574.14	43.18	54.00	-10.82	28.21	10.08	39.65	34.76	119	143	Average	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11646.42	43.19	54.00	-10.81	28.28	10.09	39.59	34.77	110	239	Average	HORIZONTAL
2	11653.82	55.78	74.00	-18.22	40.89	10.10	39.57	34.78	110	239	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11646.62	43.13	54.00	-10.87	28.22	10.09	39.59	34.77	127	297	Average	VERTICAL
2	11649.54	55.65	74.00	-18.35	40.74	10.09	39.59	34.77	127	297	Peak	VERTICAL

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 36 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15538.64	45.65	54.00	-8.35	29.81	12.53	38.45	35.14	103	0 Average	HORIZONTAL
2	15541.22	58.35	74.00	-15.65	42.51	12.53	38.45	35.14	103	0 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15539.44	58.28	74.00	-15.72	42.44	12.53	38.45	35.14	212	208 Peak	VERTICAL
2	15539.72	45.43	54.00	-8.57	29.59	12.53	38.45	35.14	212	208 Average	VERTICAL

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 40 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15596.02	58.42	74.00	-15.58	42.65	12.54	38.39	35.16	168	242 Peak	HORIZONTAL
2	15598.18	45.70	54.00	-8.30	29.93	12.54	38.39	35.16	168	242 Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15598.32	45.86	54.00	-8.14	30.09	12.54	38.39	35.16	154	332 Average	VERTICAL
2	15605.00	58.80	74.00	-15.20	43.10	12.55	38.34	35.19	154	332 Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15718.98	58.49	74.00	-15.51	42.94	12.56	38.23	35.24	180	109	Peak	HORIZONTAL
2	15719.52	45.98	54.00	-8.02	30.43	12.56	38.23	35.24	180	109	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15722.06	45.90	54.00	-8.10	30.35	12.56	38.23	35.24	196	37	Average	VERTICAL
2	15722.98	58.69	74.00	-15.31	43.14	12.56	38.23	35.24	196	37	Peak	VERTICAL





<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 149 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11485.48	55.78	74.00	-18.22	40.77	10.06	39.70	34.75	194	251 Peak	HORIZONTAL
2	11485.92	42.74	54.00	-11.26	27.73	10.06	39.70	34.75	194	251 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11486.46	43.01	54.00	-10.99	28.00	10.06	39.70	34.75	134	158 Average	VERTICAL
2	11489.62	56.33	74.00	-17.67	41.32	10.06	39.70	34.75	134	158 Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 157 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11567.52	55.77	74.00	-18.23	40.80	10.08	39.65	34.76	203	211	Peak	HORIZONTAL
2	11572.46	43.01	54.00	-10.99	28.04	10.08	39.65	34.76	203	211	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11565.96	56.54	74.00	-17.46	41.57	10.08	39.65	34.76	162	124	Peak	VERTICAL
2	11569.76	43.17	54.00	-10.83	28.20	10.08	39.65	34.76	162	124	Average	VERTICAL

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11647.78	55.65	74.00	-18.35	40.74	10.09	39.59	34.77	132	123	Peak	HORIZONTAL
2	11648.86	43.08	54.00	-10.92	28.17	10.09	39.59	34.77	132	123	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11648.14	56.08	74.00	-17.92	41.17	10.09	39.59	34.77	178	179	Peak	VERTICAL
2	11651.08	42.86	54.00	-11.14	27.97	10.10	39.57	34.78	178	179	Average	VERTICAL



For Dipole Ant.

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11a CH 36 / Chain 2
Test Date	Jul. 20, 2016		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15530.38	57.67	74.00	-16.33	40.97	12.06	38.13	33.49	109	151	Peak	HORIZONTAL
2	15542.21	44.92	54.00	-9.08	28.22	12.06	38.13	33.49	109	151	Average	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15532.02	44.92	54.00	-9.08	28.22	12.06	38.13	33.49	116	272	Average	VERTICAL
2	15532.02	57.97	74.00	-16.03	41.27	12.06	38.13	33.49	116	272	Peak	VERTICAL

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 40 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15590.03	57.31	74.00	-16.69	40.70	12.09	38.05	33.53	134	182	Peak	HORIZONTAL
2	15590.48	44.67	54.00	-9.33	28.06	12.09	38.05	33.53	134	182	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.99	57.60	74.00	-16.40	41.04	12.11	37.98	33.53	122	109	Peak	VERTICAL
2	15605.00	44.56	54.00	-9.44	28.00	12.11	37.98	33.53	122	109	Average	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15712.34	57.75	74.00	-16.25	41.43	12.15	37.84	33.67	128	236 Peak	HORIZONTAL
2	15719.39	44.80	54.00	-9.20	28.48	12.15	37.84	33.67	128	236 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15723.27	57.60	74.00	-16.40	41.28	12.15	37.84	33.67	120	180 Peak	VERTICAL
2	15729.13	44.84	54.00	-9.16	28.52	12.15	37.84	33.67	120	180 Average	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 149 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11481.15	43.62	54.00	-10.38	27.57	10.08	39.15	33.18	114	305	Average	HORIZONTAL
2	11485.19	56.98	74.00	-17.02	40.86	10.10	39.20	33.18	114	305	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11481.79	43.64	54.00	-10.36	27.59	10.08	39.15	33.18	118	255	Average	VERTICAL
2	11483.33	56.85	74.00	-17.15	40.80	10.08	39.15	33.18	118	255	Peak	VERTICAL





<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 157 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11562.47	56.92	74.00	-17.08	40.79	10.13	39.20	33.20	118	255	Peak	HORIZONTAL
2	11566.54	43.26	54.00	-10.74	27.13	10.13	39.20	33.20	118	255	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11560.03	43.38	54.00	-10.62	27.25	10.13	39.20	33.20	123	175	Average	VERTICAL
2	11572.15	55.84	74.00	-18.16	39.71	10.13	39.20	33.20	123	175	Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11640.74	56.47	74.00	-17.53	40.33	10.16	39.20	33.22	123	181	Peak	HORIZONTAL
2	11645.83	43.40	54.00	-10.60	27.26	10.16	39.20	33.22	123	181	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11655.35	43.44	54.00	-10.56	27.28	10.18	39.20	33.22	121	259	Average	VERTICAL
2	11656.06	56.48	74.00	-17.52	40.32	10.18	39.20	33.22	121	259	Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 36 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15531.60	57.69	74.00	-16.31	40.99	12.06	38.13	33.49	123	249 Peak	HORIZONTAL
2	15538.08	44.86	54.00	-9.14	28.16	12.06	38.13	33.49	123	249 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15531.86	57.57	74.00	-16.43	40.87	12.06	38.13	33.49	113	145 Peak	VERTICAL
2	15535.71	44.97	54.00	-9.03	28.27	12.06	38.13	33.49	113	145 Average	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 40 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15598.72	57.67	74.00	-16.33	41.06	12.09	38.05	33.53	118	221 Peak	HORIZONTAL
2	15605.71	44.64	54.00	-9.36	28.08	12.11	37.98	33.53	118	221 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15595.42	44.66	54.00	-9.34	28.05	12.09	38.05	33.53	115	307 Average	VERTICAL
2	15597.66	57.77	74.00	-16.23	41.16	12.09	38.05	33.53	115	307 Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15713.59	57.30	74.00	-16.70	40.98	12.15	37.84	33.67	121	278 Peak	HORIZONTAL
2	15725.83	44.94	54.00	-9.06	28.62	12.15	37.84	33.67	121	278 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15711.19	58.51	74.00	-15.49	42.14	12.15	37.84	33.62	124	219 Peak	VERTICAL
2	15714.46	45.04	54.00	-8.96	28.72	12.15	37.84	33.67	124	219 Average	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 149 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11480.10	56.43	74.00	-17.57	40.38	10.08	39.15	33.18	125	313 Peak	HORIZONTAL
2	11488.85	43.63	54.00	-10.37	27.51	10.10	39.20	33.18	125	313 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11491.22	43.69	54.00	-10.31	27.57	10.10	39.20	33.18	121	167 Average	VERTICAL
2	11493.72	56.26	74.00	-17.74	40.14	10.10	39.20	33.18	121	167 Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 157 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11562.95	43.36	54.00	-10.64	27.23	10.13	39.20	33.20	132	242 Average	HORIZONTAL
2	11574.42	56.45	74.00	-17.55	40.32	10.13	39.20	33.20	132	242 Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11563.69	43.43	54.00	-10.57	27.30	10.13	39.20	33.20	128	167 Average	VERTICAL
2	11569.46	56.22	74.00	-17.78	40.09	10.13	39.20	33.20	128	167 Peak	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11644.74	43.53	54.00	-10.47	27.39	10.16	39.20	33.22	114	301	Average	HORIZONTAL
2	11657.85	56.46	74.00	-17.54	40.30	10.18	39.20	33.22	114	301	Peak	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11655.13	56.85	74.00	-17.15	40.69	10.18	39.20	33.22	124	218	Peak	VERTICAL
2	11656.60	43.58	54.00	-10.42	27.42	10.18	39.20	33.22	124	218	Average	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.25-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

The test procedure is the same as section 4.6.3.

#### **4.7.4. Test Setup Layout**

This test setup layout is the same as that shown in section 4.6.4.

#### **4.7.5. Test Deviation**

There is no deviation with the original standard.

#### **4.7.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

For PIFA Ant.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 36, 40, 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

##### Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.60	59.73	74.00	-14.27	52.87	6.92	34.85	34.91	171	199 Peak	VERTICAL
2	5149.40	47.56	54.00	-6.44	40.70	6.92	34.85	34.91	171	199 Average	VERTICAL
3	5178.20	105.19			98.29	6.93	34.88	34.91	171	199 Peak	VERTICAL
4	5179.00	96.10			89.20	6.93	34.88	34.91	171	199 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5109.20	59.01	74.00	-14.99	52.20	6.90	34.81	34.90	138	189 Peak	VERTICAL
2	5116.80	47.04	54.00	-6.96	40.21	6.91	34.82	34.90	138	189 Average	VERTICAL
3	5197.60	106.45			99.53	6.93	34.90	34.91	138	189 Peak	VERTICAL
4	5201.20	96.75			89.83	6.93	34.90	34.91	138	189 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5114.60	46.92	54.00	-7.08	40.09	6.91	34.82	34.90	174	196 Average	HORIZONTAL
2	5122.40	58.47	74.00	-15.53	51.64	6.91	34.82	34.90	174	196 Peak	HORIZONTAL
3	5238.80	105.01			98.00	6.98	34.94	34.91	174	196 Peak	HORIZONTAL
4	5241.20	95.95			88.94	6.98	34.94	34.91	174	196 Average	HORIZONTAL
5	5366.00	59.59	74.00	-14.41	52.32	7.12	35.06	34.91	174	196 Peak	HORIZONTAL
6	5384.60	47.61	54.00	-6.39	40.32	7.13	35.08	34.92	174	196 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 149, 157, 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5508.00	60.60	68.20	-7.60	53.04	7.28	35.20	34.92	160	198	Peak	VERTICAL
2	5746.00	96.89			89.29	7.29	35.25	34.94	160	198	Average	VERTICAL
3	5746.00	106.68			99.08	7.29	35.25	34.94	160	198	Peak	VERTICAL
4	5977.00	59.56	68.20	-8.64	51.73	7.50	35.30	34.97	160	198	Peak	VERTICAL

Item 2, 3 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5583.00	60.80	68.20	-7.40	53.13	7.38	35.22	34.93	148	197	Peak	VERTICAL
2	5784.00	106.44			98.87	7.26	35.26	34.95	148	197	Peak	VERTICAL
3	5787.00	96.72			89.15	7.26	35.26	34.95	148	197	Average	VERTICAL
4	5954.00	60.44	68.20	-7.76	52.67	7.45	35.29	34.97	148	197	Peak	VERTICAL

Item 2, 3 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5626.00	60.39	68.20	-7.81	52.71	7.38	35.23	34.93	148	196	Peak	VERTICAL
2	5823.00	105.21			97.59	7.30	35.27	34.95	148	196	Peak	VERTICAL
3	5824.00	95.65			88.03	7.30	35.27	34.95	148	196	Average	VERTICAL
4	6020.00	61.56	68.20	-6.64	53.68	7.54	35.31	34.97	148	196	Peak	VERTICAL

Item 2, 3 are the fundamental frequency at 5825 MHz.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 36, 40, 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

### Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5147.40	47.42	54.00	-6.58	40.56	6.92	34.85	34.91	162	199	Average	VERTICAL
2	5149.60	60.53	74.00	-13.47	53.67	6.92	34.85	34.91	162	199	Peak	VERTICAL
3	5179.00	96.03			89.13	6.93	34.88	34.91	162	199	Average	VERTICAL
4	5180.20	105.83			98.93	6.93	34.88	34.91	162	199	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5128.80	47.08	54.00	-6.92	40.24	6.91	34.84	34.91	151	190	Average	VERTICAL
2	5146.80	58.74	74.00	-15.26	51.88	6.92	34.85	34.91	151	190	Peak	VERTICAL
3	5198.00	105.80			98.88	6.93	34.90	34.91	151	190	Peak	VERTICAL
4	5199.20	96.48			89.56	6.93	34.90	34.91	151	190	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5109.80	46.83	54.00	-7.17	40.02	6.90	34.81	34.90	169	206	Average	HORIZONTAL
2	5112.80	59.08	74.00	-14.92	52.25	6.91	34.82	34.90	169	206	Peak	HORIZONTAL
3	5241.20	92.99			85.98	6.98	34.94	34.91	169	206	Average	HORIZONTAL
4	5242.40	102.62			95.61	6.98	34.94	34.91	169	206	Peak	HORIZONTAL
5	5381.00	47.65	54.00	-6.35	40.36	7.13	35.08	34.92	169	206	Average	HORIZONTAL
6	5384.60	59.65	74.00	-14.35	52.36	7.13	35.08	34.92	169	206	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.



<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 149, 157, 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5554.00	60.98	68.20	-7.22	53.35	7.34	35.21	34.92	164	204 Peak	HORIZONTAL
2	5743.00	103.25			95.65	7.29	35.25	34.94	164	204 Peak	HORIZONTAL
3	5744.00	93.41			85.81	7.29	35.25	34.94	164	204 Average	HORIZONTAL
4	5951.00	60.28	68.20	-7.92	52.51	7.45	35.29	34.97	164	204 Peak	HORIZONTAL

Item 2, 3 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5631.00	59.57	68.20	-8.63	51.89	7.38	35.23	34.93	158	196 Peak	VERTICAL
2	5784.00	96.48			88.91	7.26	35.26	34.95	158	196 Average	VERTICAL
3	5787.00	105.38			97.81	7.26	35.26	34.95	158	196 Peak	VERTICAL
4	6029.00	60.73	68.20	-7.47	52.83	7.56	35.31	34.97	158	196 Peak	VERTICAL

Item 2, 3 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5634.00	60.27	68.20	-7.93	52.59	7.38	35.23	34.93	151	197 Peak	VERTICAL
2	5824.00	94.99			87.37	7.30	35.27	34.95	151	197 Average	VERTICAL
3	5824.00	104.29			96.67	7.30	35.27	34.95	151	197 Peak	VERTICAL
4	5990.00	60.80	68.20	-7.40	52.97	7.50	35.30	34.97	151	197 Peak	VERTICAL

Item 2, 3 are the fundamental frequency at 5825 MHz.

## For Dipole Ant.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 36, 40, 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

## Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5148.75	60.54	74.00	-13.46	53.28	6.44	33.74	32.92	224	359	Peak	HORIZONTAL
2	5150.00	46.79	54.00	-7.21	39.53	6.44	33.74	32.92	224	359	Average	HORIZONTAL
3	5178.08	107.74			100.40	6.47	33.79	32.92	224	359	Peak	HORIZONTAL
4	5181.76	97.33			89.99	6.47	33.79	32.92	224	359	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

## Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5116.35	58.98	74.00	-15.02	51.79	6.41	33.69	32.91	206	360	Peak	HORIZONTAL
2	5146.47	46.58	54.00	-7.42	39.32	6.44	33.74	32.92	206	360	Average	HORIZONTAL
3	5199.04	106.42			99.04	6.48	33.82	32.92	206	360	Peak	HORIZONTAL
4	5201.28	97.48			90.10	6.48	33.82	32.92	206	360	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

## Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5122.69	58.77	74.00	-15.23	51.59	6.41	33.69	32.92	224	360	Peak	HORIZONTAL
2	5145.77	46.31	54.00	-7.69	39.05	6.44	33.74	32.92	224	360	Average	HORIZONTAL
3	5239.04	96.93			89.44	6.52	33.89	32.92	224	360	Average	HORIZONTAL
4	5239.04	105.89			98.40	6.52	33.89	32.92	224	360	Peak	HORIZONTAL
5	5354.42	59.45	74.00	-14.55	51.67	6.62	34.08	32.92	224	360	Peak	HORIZONTAL
6	5365.48	46.72	54.00	-7.28	38.95	6.62	34.08	32.93	224	360	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.





<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11a CH 149, 157, 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Channel 149**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5646.50	59.84	68.20	-8.36	51.62	6.80	34.39	32.97	218	353	Peak	HORIZONTAL
2	5744.00	107.98			99.62	6.90	34.45	32.99	218	353	Peak	HORIZONTAL
3	5744.20	98.78			90.42	6.90	34.45	32.99	218	353	Average	HORIZONTAL
4	5980.00	60.41	68.20	-7.79	51.88	7.00	34.59	33.06	218	353	Peak	HORIZONTAL

Item 2, 3 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5610.50	59.59	68.20	-8.61	51.41	6.77	34.37	32.96	275	197	Peak	HORIZONTAL
2	5784.00	106.06			97.67	6.93	34.47	33.01	275	197	Peak	HORIZONTAL
3	5785.80	97.09			88.70	6.93	34.47	33.01	275	197	Average	HORIZONTAL
4	5949.50	59.79	68.20	-8.41	51.28	6.99	34.57	33.05	275	197	Peak	HORIZONTAL

Item 2, 3 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5601.50	59.85	68.20	-8.35	51.70	6.75	34.36	32.96	218	349	Peak	HORIZONTAL
2	5823.50	107.28			98.84	6.96	34.50	33.02	218	349	Peak	HORIZONTAL
3	5824.20	98.39			89.95	6.96	34.50	33.02	218	349	Average	HORIZONTAL
4	5987.00	59.92	68.20	-8.28	51.39	7.00	34.59	33.06	218	349	Peak	HORIZONTAL

Item 2, 3 are the fundamental frequency at 5825 MHz.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 36, 40, 48 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

### Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5138.65	58.20	74.00	-15.80	50.97	6.43	33.72	32.92	208	327 Peak	HORIZONTAL
2	5149.55	46.43	54.00	-7.57	39.17	6.44	33.74	32.92	208	327 Average	HORIZONTAL
3	5178.56	94.58			87.24	6.47	33.79	32.92	208	327 Average	HORIZONTAL
4	5179.04	104.07			96.73	6.47	33.79	32.92	208	327 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5103.85	58.26	74.00	-15.74	51.10	6.40	33.67	32.91	148	178 Peak	VERTICAL
2	5142.95	46.18	54.00	-7.82	38.92	6.44	33.74	32.92	148	178 Average	VERTICAL
3	5201.60	95.84			88.43	6.49	33.84	32.92	148	178 Peak	VERTICAL
4	5203.21	86.47			79.06	6.49	33.84	32.92	148	178 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5102.02	58.80	74.00	-15.20	51.64	6.40	33.67	32.91	198	354 Peak	HORIZONTAL
2	5106.35	46.12	54.00	-7.88	38.96	6.40	33.67	32.91	198	354 Average	HORIZONTAL
3	5240.00	104.68			97.19	6.52	33.89	32.92	198	354 Peak	HORIZONTAL
4	5241.92	95.37			87.88	6.52	33.89	32.92	198	354 Average	HORIZONTAL
5	5365.48	59.07	74.00	-14.93	51.30	6.62	34.08	32.93	198	354 Peak	HORIZONTAL
6	5374.62	46.52	54.00	-7.48	38.70	6.64	34.11	32.93	198	354 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 149, 157, 165 / Chain 2
<b>Test Date</b>	Jul. 20, 2016		

**Channel 149**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5617.50	60.42	68.20	-7.78	52.24	6.77	34.37	32.96	200	345	Peak	HORIZONTAL
2	5745.00	107.37			99.01	6.90	34.45	32.99	200	345	Peak	HORIZONTAL
3	5745.80	97.94			89.59	6.90	34.45	33.00	200	345	Average	HORIZONTAL
4	5942.00	59.73	68.20	-8.47	51.22	6.99	34.57	33.05	200	345	Peak	HORIZONTAL

Item 2, 3 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5643.00	58.85	68.20	-9.35	50.63	6.80	34.39	32.97	150	284	Peak	VERTICAL
2	5785.00	98.40			90.01	6.93	34.47	33.01	150	284	Peak	VERTICAL
3	5785.80	89.04			80.65	6.93	34.47	33.01	150	284	Average	VERTICAL
4	5975.50	60.25	68.20	-7.95	51.73	6.99	34.58	33.05	150	284	Peak	VERTICAL

Item 2, 3 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5619.00	59.90	68.20	-8.30	51.72	6.77	34.37	32.96	200	359	Peak	HORIZONTAL
2	5824.00	105.51			97.07	6.96	34.50	33.02	200	359	Peak	HORIZONTAL
3	5824.20	96.08			87.64	6.96	34.50	33.02	200	359	Average	HORIZONTAL
4	5932.50	60.02	68.20	-8.18	51.52	6.98	34.56	33.04	200	359	Peak	HORIZONTAL

Item 2, 3 are the fundamental frequency at 5825 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is  $5^\circ\text{C} \sim 60^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

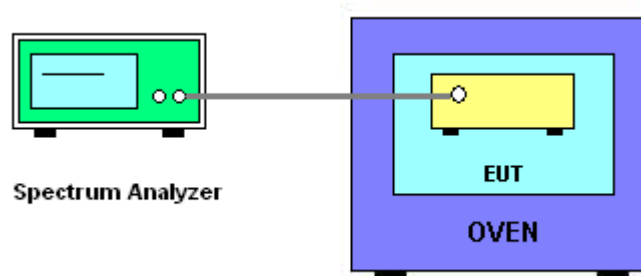

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	24°C	<b>Humidity</b>	51%
<b>Test Engineer</b>	Paul Chen	<b>Test Date</b>	Jul. 23, 2016

Mode: 20 MHz / Chain 2

#### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5199.9921	5199.9916	5199.9915	5199.9909
110.00	5199.9918	5199.9912	5199.9902	5199.9898
93.50	5199.9915	5199.9908	5199.9906	5199.9903
Max. Deviation (MHz)	0.0085	0.0092	0.0098	0.0102
Max. Deviation (ppm)	1.63	1.77	1.88	1.96
Result	Complies			

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
5	5199.9906	5199.9904	5199.9900	5199.9890
10	5199.9909	5199.9908	5199.9907	5199.9906
20	5199.9910	5199.9907	5199.9903	5199.9893
30	5199.9918	5199.9910	5199.9900	5199.9896
40	5199.9934	5199.9925	5199.9916	5199.9913
50	5199.9950	5199.9948	5199.9939	5199.9931
60	5199.9964	5199.9957	5199.9953	5199.9947
Max. Deviation (MHz)	0.0112	0.0118	0.0119	0.0127
Max. Deviation (ppm)	2.15	2.27	2.28	2.44
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9926	5784.9921	5784.9911	5784.9910
110.00	5784.9918	5784.9913	5784.9909	5784.9908
93.50	5784.9916	5784.9912	5784.9906	5784.9899
Max. Deviation (MHz)	0.0084	0.0088	0.0094	0.0101
Max. Deviation (ppm)	1.45	1.52	1.62	1.74
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
5	5784.9876	5784.9868	5784.9860	5784.9850
10	5784.9894	5784.9885	5784.9880	5784.9875
20	5784.9901	5784.9893	5784.9885	5784.9881
30	5784.9918	5784.9909	5784.9908	5784.9900
40	5784.9934	5784.9933	5784.9925	5784.9919
50	5784.9940	5784.9930	5784.9924	5784.9918
60	5784.9960	5784.9952	5784.9945	5784.9943
Max. Deviation (MHz)	0.0141	0.0147	0.0148	0.0150
Max. Deviation (ppm)	2.43	2.54	2.55	2.59
Result	Complies			

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
BILOG ANTENNA	TESEQ	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Mar. 01, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2016	Conducted (TH01-CB)





Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%