



RADIO TEST REPORT

For

MODEL NO.: 1855

FCC ID: C3K1855

IC ID: 3048A-1855

Test Report No. R-TR516-FCCISED-DFS-3

Issue Date: July 15, 2019

FCC CFR47 Part 15 Subpart E
Innovation, Science and Economic Development
Canada RSS-247 Issue 2

Prepared by

Microsoft EMC Laboratory
17760 NE 67th Ct,
Redmond WA, 98052, U.S.A.
425-421-9799

dasalina@microsoft.com



TESTING CERT #3472.01

1 Record of Revisions

| Revision | Date | Section | Page(s) | Summary of Changes | Author/Revised By: |
|----------|----------|---------|---------|---|--------------------|
| 1.0 | 06/07/19 | All | All | Version 1.0 | Jems Pradhan |
| 2.0 | 07/03/19 | 4 | 8 | Removed Main and MIMO antenna designation | Daniel Salinas |
| 3.0 | 07/15/19 | 4 | 7 | Corrected Typo in IC ID | Daniel Salinas |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Table of Contents

| | | |
|-------|--|----|
| 1 | Record of Revisions..... | 2 |
| 2 | Deviations from Standards | 6 |
| 3 | Facilities and Accreditations | 6 |
| 3.1 | Test Facility | 6 |
| 3.2 | Accreditations | 6 |
| 4 | Product Description | 7 |
| 4.1 | Test Configurations | 8 |
| 4.2 | Environmental Conditions..... | 8 |
| 4.3 | Antenna Requirements..... | 8 |
| 4.4 | Equipment Modifications | 8 |
| 4.5 | Dates of Testing | 8 |
| 5 | Test Results Summary | 9 |
| 6 | Test Equipment List..... | 10 |
| 7 | Test Method..... | 11 |
| 7.1 | Antenna port conducted measurements..... | 11 |
| 7.2 | Test Setup Diagrams..... | 11 |
| 7.3 | Radar Waveform Verification..... | 12 |
| 7.4 | Channel Loading | 16 |
| 7.4.1 | Test Method | 16 |
| 8 | Test Results..... | 18 |
| 8.1 | Channel Move Time | 18 |
| 8.1.1 | Test Requirement:..... | 18 |
| 8.1.2 | Test Method: | 18 |
| 8.1.3 | Limits: | 18 |
| 8.1.4 | Test Results: | 18 |
| 8.1.5 | Test Data..... | 18 |
| 8.2 | Channel Closing Transmission Time..... | 22 |
| 8.2.1 | Test Requirement:..... | 22 |
| 8.2.2 | Test Method: | 22 |
| 8.2.3 | Limits: | 22 |
| 8.2.4 | Test Results: | 22 |
| 8.2.5 | Test Data..... | 22 |
| 8.3 | Non-Occupancy Period | 25 |

| | | |
|-------|------------------------|----|
| 8.3.1 | Test Requirement:..... | 25 |
| 8.3.2 | Test Method: | 25 |
| 8.3.3 | Limits: | 25 |
| 8.3.4 | Test Results: | 25 |
| 8.3.5 | Test Data:..... | 25 |

Test Report Attestation

Microsoft Corporation**Model:** 1855**FCC ID:** C3K1855**IC ID:** 3048A-1855**Applicable Standards**

| Specification | Test Result |
|--|-------------|
| FCC 47CFR Rule Parts 15.407 (DFS) | Pass |
| Innovation, Science and Economic Development Canada RSS-247 Issue 2 (DFS) | Pass |

Microsoft EMC Laboratory attests that the product model identified in this report has been tested to and meets the requirements identified in the above standards. The test results in this report solely pertains to the specific sample tested, under the conditions and operating modes as provided by the customer.

This report shall not be used to claim product certification, approval, or endorsement by A2LA or any agency of any Government. Reproduction, duplication or publication of extracts from this test report is prohibited and requires prior written approval of Microsoft EMC Laboratory.

This report replaces previously issued report number R-TR516-FCCISED-DFS-2 issued 07/03/2019.



Written By:

Jems Pradhan

Radio Compliance Test Engineer



Reviewed/ Issued By: Daniel Salinas

Radio Compliance Lab Technical
Manager

2 Deviations from Standards

None.

3 Facilities and Accreditations

3.1 Test Facility

All test facilities used to collect the test data are located at Microsoft EMC Laboratory,
17760 NE 67th Ct,
Redmond WA, 98052, USA

3.2 Accreditations

The lab is established and follows procedures as outlined in IEC/ISO 17025 and A2LA accreditation requirements.

A2LA Accredited Testing Certificate Number: 3472.01

FCC Registration Number: US1141

IC Site Registration Numbers: 3048A-3, 3048A-4

4 Product Description

| | |
|--|---|
| Company Name: | Microsoft Corporation |
| Address: | One Microsoft Way |
| City, State, Zip: | Redmond, WA 98052-6399 |
| Customer Contact: | Chaitrali Limaye |
| Functional Description of the EUT: | Radio transceiver with 802.11a/b/g/n/ac MIMO radio supporting 20/40/80MHz bandwidths, Bluetooth 5.0 |
| Model: | 1855 |
| FCC ID: | C3K1855 |
| IC ID: | 3048A-1855 |
| Radio under test: | IEEE 802.11a/n/ac with 20MHz, 40MHz and 80MHz Signal Bandwidths |
| Modulation(s): | OFDM – BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM |
| EUT Classification: | UNII Client Device without radar detection |
| RF Conducted port impedance: | 50 Ω in the frequency range of operation |
| Antenna Gain Measurement Verification: | N/A – Measurements were performed using conducted test methods |
| Transmit Power Control: | The EUT does not implement TPC |
| Wireless Bridge or Mesh Capability: | The device does not implement bridge or mesh modes. |
| Power – Cycle Time: | N/A. The EUT is a client device without radar detection |
| Radar Waveform Information: | The EUT does not detect or store information regarding radar waveforms |
| Equipment Design State: | Prototype/Production Equivalent (EV3) |
| Equipment Condition: | Good |
| Test Sample Details: | RF Conducted Test Sample: SN: M1042497-004 |

4.1 Test Configurations

The device was setup in normal operation and connected wirelessly to an 802.11 access point on 40 MHz and 80 MHz bandwidth channels.

Iperf was used to generate a continuous amount of traffic to meet channel loading conditions and allow for random pinging intervals and dynamically allocate the talk/listen ratio.

Measurements were performed on Chain 0 of the EUT. DFS signals were injected into 5 GHz Tx/Rx port B of the Master device.

4.2 Environmental Conditions

Ambient air temperature of the test site was within the range of 10 °C to 40 °C (50 °F to 104 °F) unless the EUT specified testing over a different temperature range. Humidity levels were in the range of 10% to 90% relative humidity. Testing conditions were within tolerance and any deviations required from the EUT are reported.

4.3 Antenna Requirements

The antennas are internal, permanently attached and there are no provisions for connection to an external antenna.

| Frequency Band (MHz) | Antenna Gain | |
|-----------------------------|---------------------------------------|---------------------------------------|
| | Wi-Fi Chain 0 Antenna Peak Gain (dBi) | Wi-Fi Chain 1 Antenna Peak Gain (dBi) |
| UNII Band 1- 5150 to 5250 | 4.3 | 5.7 |
| UNII Band 2a – 5250 to 5350 | 4.3 | 6 |
| UNII Band 2c – 5470 to 5725 | 5.2 | 6.6 |
| UNII Band 3 – 5725 to 5850 | 3.0 | 3.2 |

Simultaneous transmission on both transmit chains was observed to be the worst-case mode of operation for all test cases. Since the transmit signals are completely uncorrelated in regard to transmit power, the combined gain is calculated using the following formula as specified in KDB 662911 D01 Multiple Transmitter Output v02r01:

$$\text{Directional gain} = 10 \log [(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

| Combined Directional Antenna Gain | |
|-----------------------------------|--|
| Frequency Band (MHz) | Uncorrelated Combined Directional Gain (dBi) |
| UNII Band 1- 5150 to 5250 | 5.06 |
| UNII Band 2a – 5250 to 5350 | 5.23 |
| UNII Band 2c – 5470 to 5725 | 5.96 |
| UNII Band 3 – 5725 to 5850 | 3.10 |

4.4 Equipment Modifications

No modifications were made during testing.

4.5 Dates of Testing

Testing was performed from March 22nd – May24th, 2019.

5 Test Results Summary

| Test Description | FCC CFR 47/ ISED Rule Part | Limit | Test Result |
|--------------------------------------|-------------------------------------|--|-------------|
| In-Service Monitoring | 15.407(h)(2)(iv) RSS-247 [6.3] | Monitor Co-channel Radar | N/A* |
| Channel Availability Check | 15.407 (h)(2)(ii) RSS-247 [6.3] | 60s Detection | N/A* |
| Channel Move Time | 15.407 (h)(2)(iii) RSS-247 [6.3] | 10s | Pass |
| Channel Closing Transmission Time | 15.407 (h)(2)(iii) RSS-247 [6.3] | 200ms + Aggregate 60ms over remaining 10s period | Pass |
| Non-Occupancy Period | 15.407 (h)(2)(iv) RSS-247 [6.3] | 30 minutes | Pass |

*Note: The EUT is a Client device without radar detection.

6 Test Equipment List

| Manufacturer | Description | Model # | Asset # | FCC ID | Calibration Due |
|-----------------|--------------------------------|-------------------|----------|---------------------------|-----------------|
| Rohde & Schwarz | VSG | SMBV100A | RF-141 | N/A | 04/12/2020 |
| Cisco | Cisco Aironet ISO Access Point | AIR-AP1252AG-A-K9 | RF-331 | LDK 102061, LDK 102062 | N/A* |
| Rohde & Schwarz | Signal Analyzer | FSV40 | RF-245 | N/A | 04/12/2020 |
| L-Com | RF Combiner | SC5802N | RF-048 | N/A | N/A* |
| L-Com | RF Combiner | SC5802N | RF-049 | N/A | N/A* |
| Agilent | DC power Supply | E3632A | EMC-1152 | N/A | N/A* |
| Pasternack | LPF DC to 7GHz | PE87FL1015 | RF-649 | N/A | N/A* |
| Pasternack | Attenuator | PE7087-10 | RF-862 | N/A | N/A* |
| XMA | Attenuator | 3082-6156-10 | EMC-109 | N/A | N/A* |
| Pasternack | Attenuator | PE7005-20 | RF-083 | N/A | N/A* |
| Pasternack | Attenuator | PE7087-10 | RF-555 | N/A | N/A* |
| Pasternack | Cable | PE304-48 | RF-665 | N/A | N/A* |
| Rosenberger | Cable | L72-449-1830 | RF-111 | N/A | N/A* |
| Nokia | Cable | 0730231 | RF-715 | N/A | N/A* |
| Argosy | Cable | ARL72-450-1830 | EMC-316 | N/A | N/A* |
| Micro-tronics | Notch Filter | BRM50702 | RF-056 | N/A | N/A* |
| Murata | Cable | MXJA01JA1000 | RF-883 | N/A | N/A* |

Note: Equipment with Calibration Due Date of "N/A*" are functionally verified or characterized before test.

7 Test Method

7.1 Antenna port conducted measurements

Antenna port conducted measurements were performed on a bench-top setup consisting of a spectrum analyzer, splitters/combiners (as necessary), attenuators, and pre-characterized RF cables.

The correction factors between the EUT, support equipment, radar test generator and the spectrum analyzer are added internally in the test system.

7.2 Test Setup Diagrams

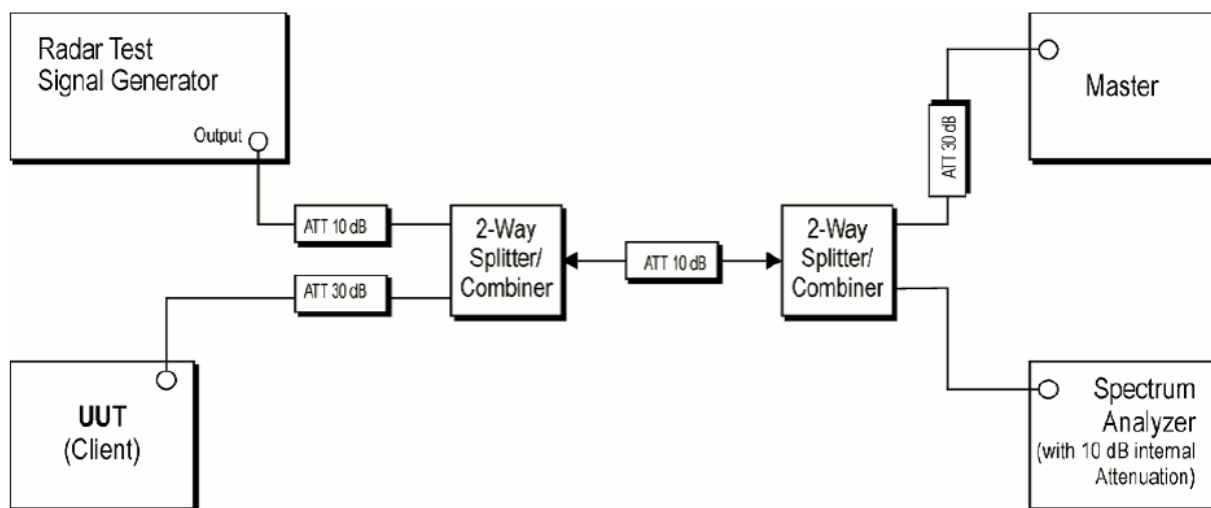


Figure 1. Test Setup for Antenna Port Conducted Measurements

7.3 Radar Waveform Verification


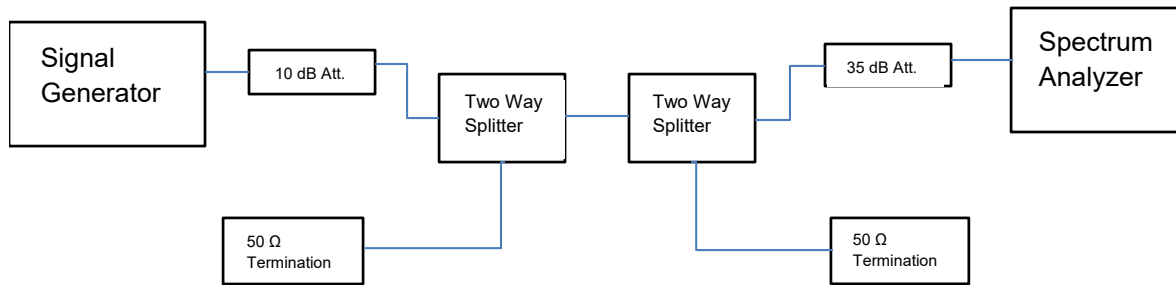


Figure 2. Test Setup for Conducted Measurement Radar Verification

| Device Type | Device | Min. Output Power (dBm) | Max Output Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Required Radar Detection Threshold Level (dBm) |
|-------------|-------------------------|-------------------------|------------------------|--------------------|------------|--|
| Master | CISCO AIR-AP1252AG-A-K9 | -1 | 20 | 6 | 26 | -64 |
| Master | Linksys WRT3200 ACM | 12.10 | 23.97 | 5.1 | 29.07 | -64 |
| Client | Microsoft Model 1855 | 14.68 | 20.05 | 5.96 | 26.01 | N/A |


| DFS Measurement | Radar Type |
|-----------------------------------|------------|
| Channel Move Time | 0 |
| Channel Closing Transmission Time | 0 |
| Non-Occupancy Period | 0 |

| Rader Type | Frequency (MHz) | Level (dBm) | Pulse count | Pulse width (µs) | Pulse Repetition Interval (ms) |
|------------|-----------------|-------------|-------------|------------------|--------------------------------|
| 0 | 5550 | -63.91 | 18 | 1.00 | 1.416 |
| 0 | 5610 | -63.93 | 18 | 1.00 | 1.417 |

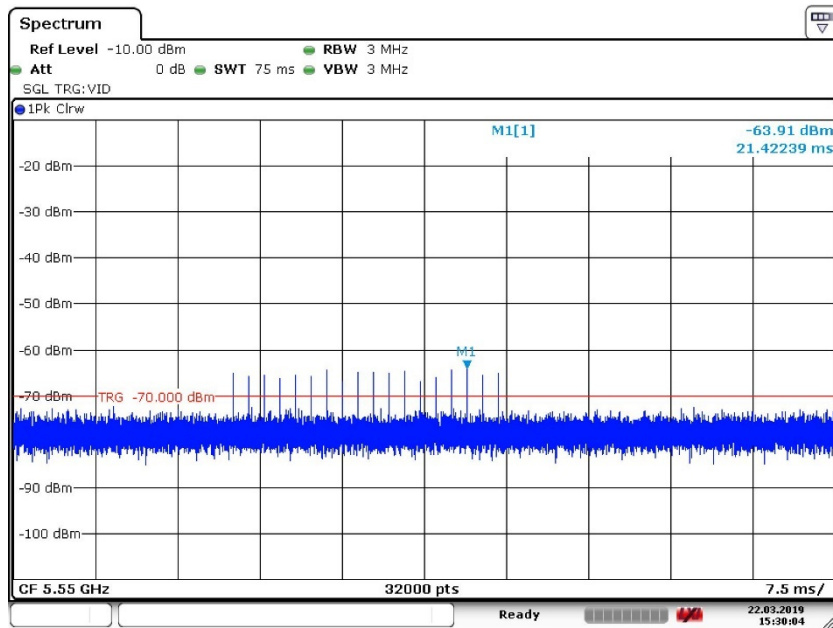


Date: 22.MAR.2019 15:30:04

Figure 3. Radar Burst Level at -64dBm: Radar Type 0 (5550 MHz 40 MHz BW)

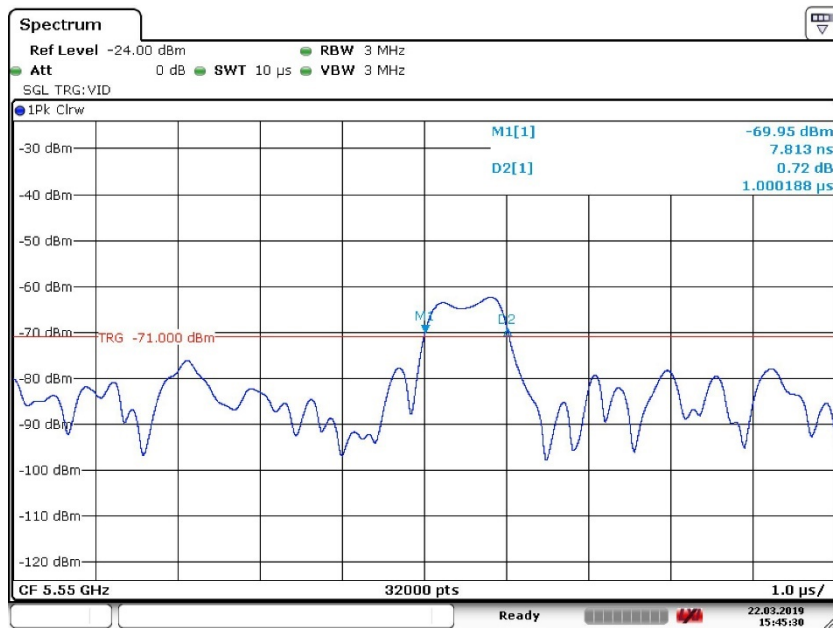


Date: 22.MAR.2019 15:45:30

Figure 4. Radar Pulse width: Radar Type 0 (5550 MHz 40 MHz BW)

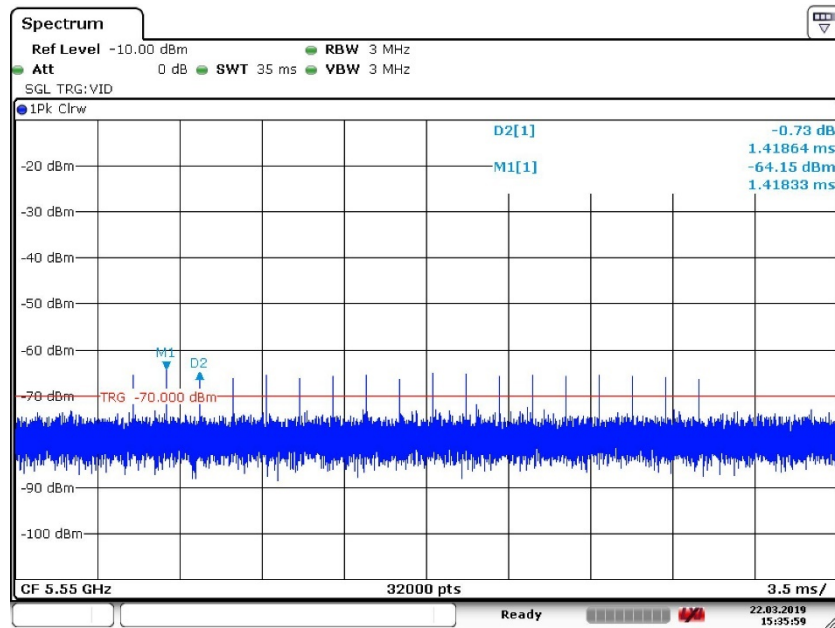


Date: 22.MAR.2019 15:35:59

Figure 5. Radar Pulse Repetition Interval: Radar Type 0 (5550 MHz 40 MHz BW)

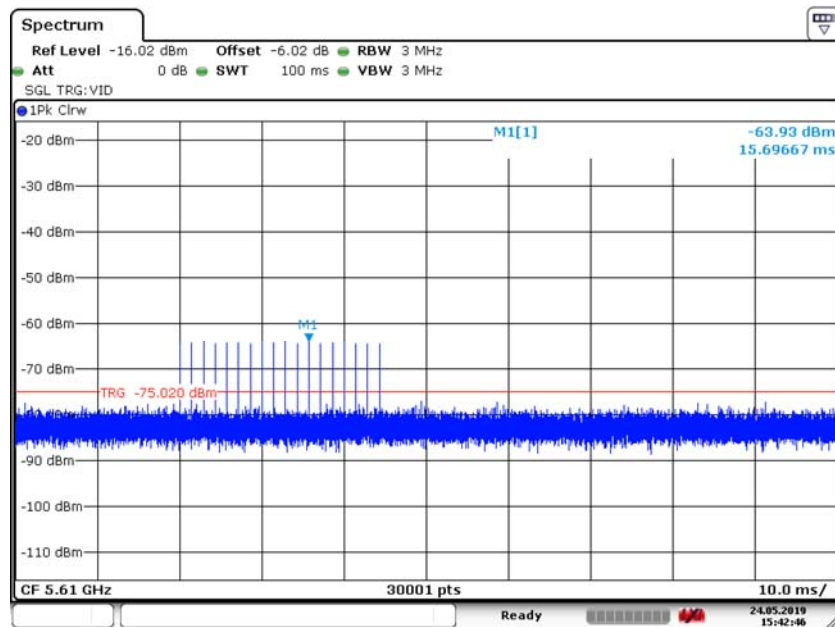


Date: 24.MAY.2019 15:42:47

Figure 6. Radar Burst Level at -64dBm: Radar Type 0 (5610 MHz 80 MHz BW)

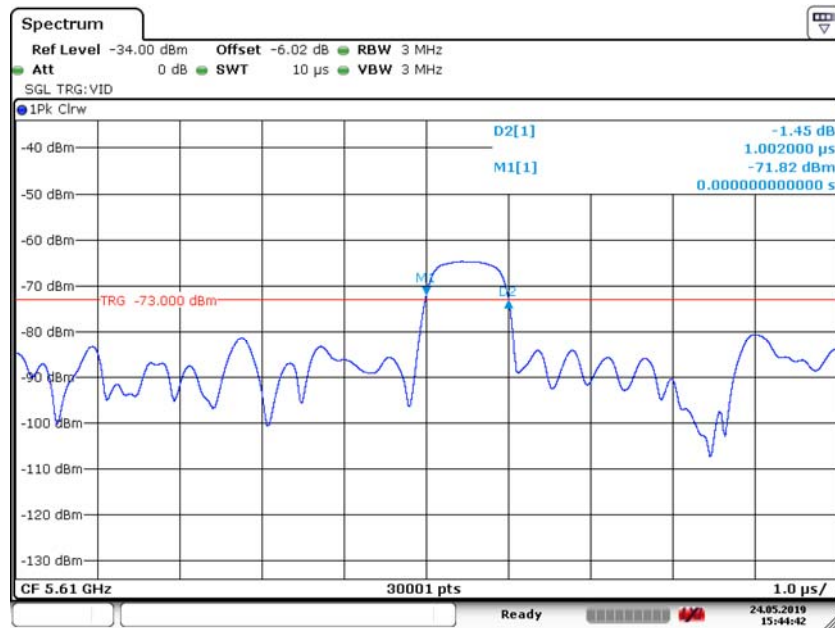

Date: 24.MAY.2019 15:44:42

Figure 7. Radar Pulse width: Radar Type 0 (5610 MHz 80 MHz BW)

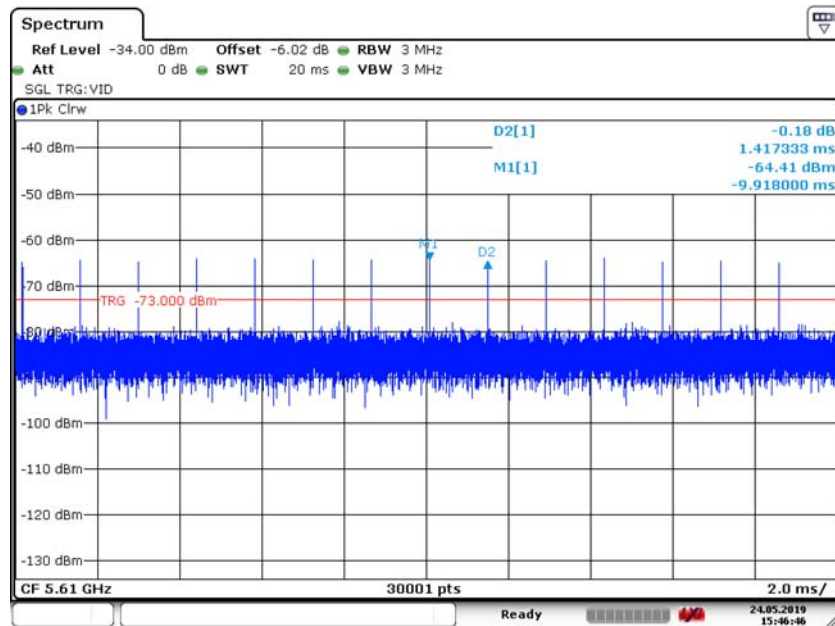

Date: 24.MAY.2019 15:46:46

Figure 8. Radar Pulse Repetition Interval: Radar Type 0 (5610 MHz 80 MHz BW)

7.4 Channel Loading


7.4.1 Test Method

Channel Loading measurements were taken with a spectrum analyzer. CSV files were captured, and Channel Loading was calculated using that measured data. Channel Loading was measured and verified to be > 17%.

Channel Loading is calculated using the following formula:


$$\text{Channel Loading (\%)} = \frac{\text{On Time}}{(\text{On Time} + \text{Off Time})} \times 100$$

| Frequency (MHz) | Signal Bandwidth (MHz) | Total On Time (ms) | On Time + Off Time (ms) | Channel Loading (%) |
|-----------------|------------------------|--------------------|-------------------------|---------------------|
| 5550 | 40 | 95.867 | 500 | 19.17 |
| 5610 | 80 | 122.283 | 500 | 24.66 |

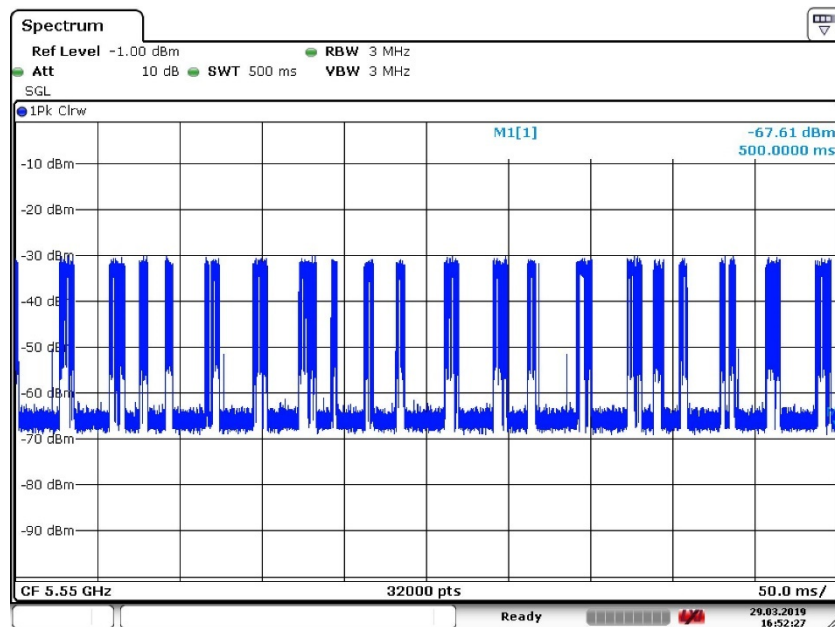

Date: 29.MAR.2019 16:52:27

Figure 9. Channel Loading (5550 MHz 40 MHz BW)

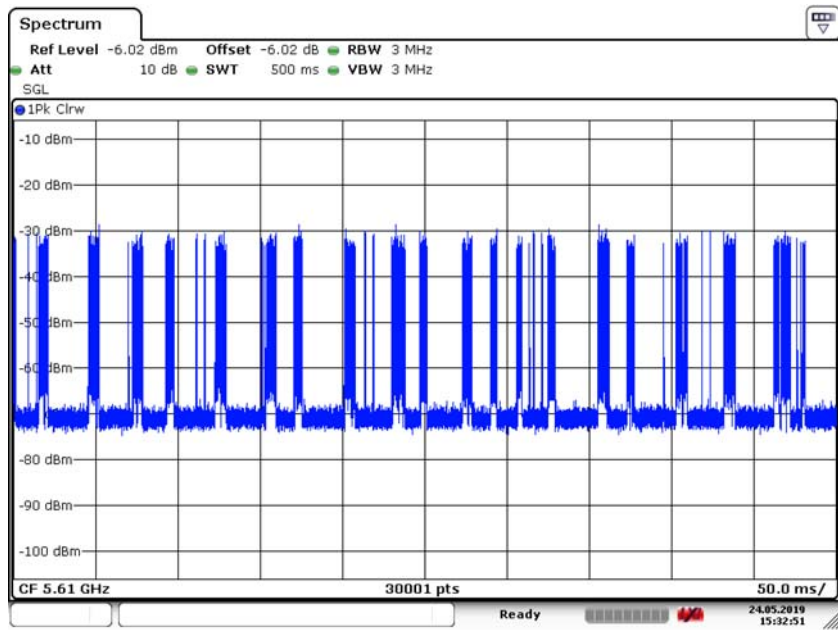

Date: 24.MAY.2019 15:32:51

Figure 10. Channel Loading (5610 MHz 80 MHz BW)

8 Test Results

8.1 Channel Move Time

8.1.1 Test Requirement:

FCC CFR 47 Rule Part 15.407 (h)(2)(iv)

ISED Canada RSS-247 [6.3]

8.1.2 Test Method:

Measurements were performed according to the procedures defined in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

8.1.3 Limits:

After a radar signal is detected, the device shall cease all transmissions on the operating channel within 10 seconds.

8.1.4 Test Results:

Pass.

The EUT ceased transmission on the channel within 200ms and there was less than an aggregate of 60ms transmission time in a 10s period.

8.1.5 Test Data

8.1.5.1 Channel Move Time

| Frequency (MHz) | Signal Bandwidth (MHz) | Channel Move Time (s) | Limit (s) | Result |
|-----------------|------------------------|-----------------------|-----------|--------|
| 5550 | 40 | 0.052 | 10 | Pass |
| 5610 | 80 | 2.107 | 10 | Pass |

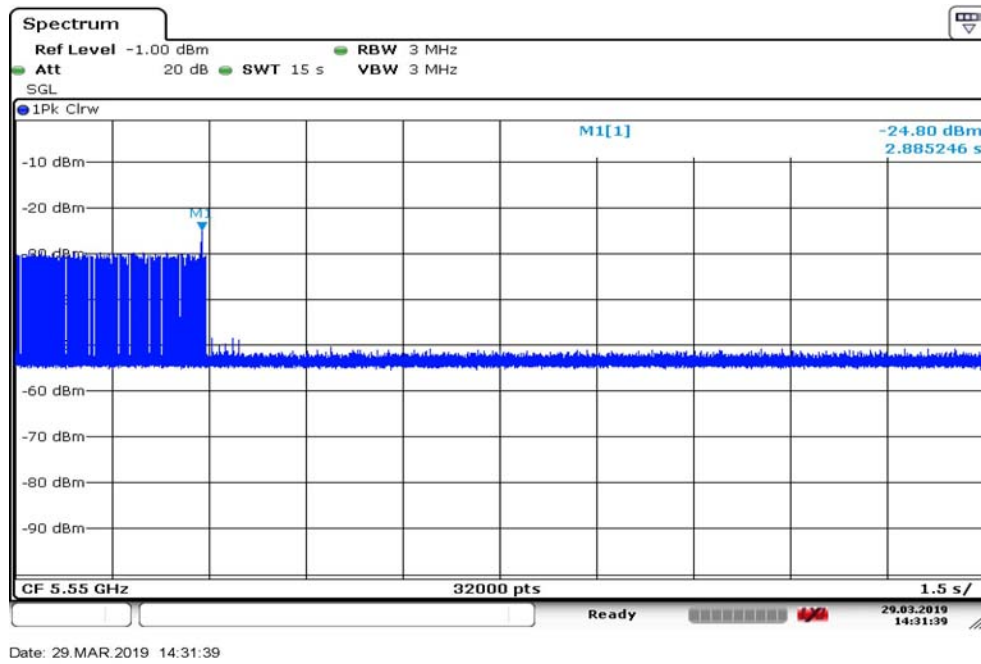


Figure 11. DFS Radar Detection Plot Channel 5550 MHz

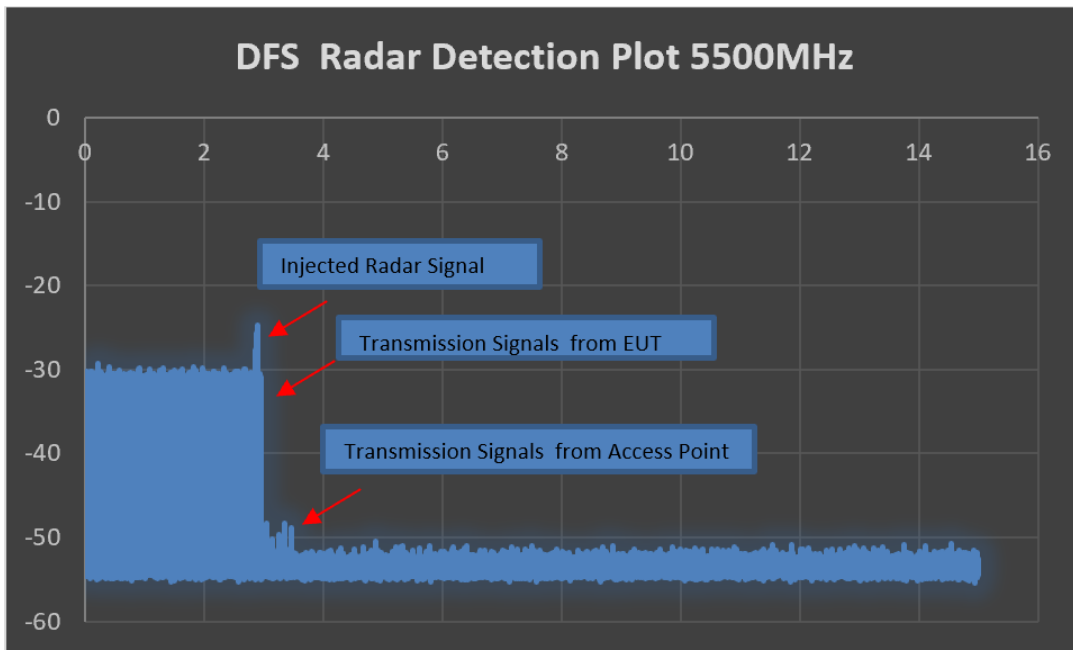


Figure 12. DFS Radar Detection Plot Channel 5550 MHz

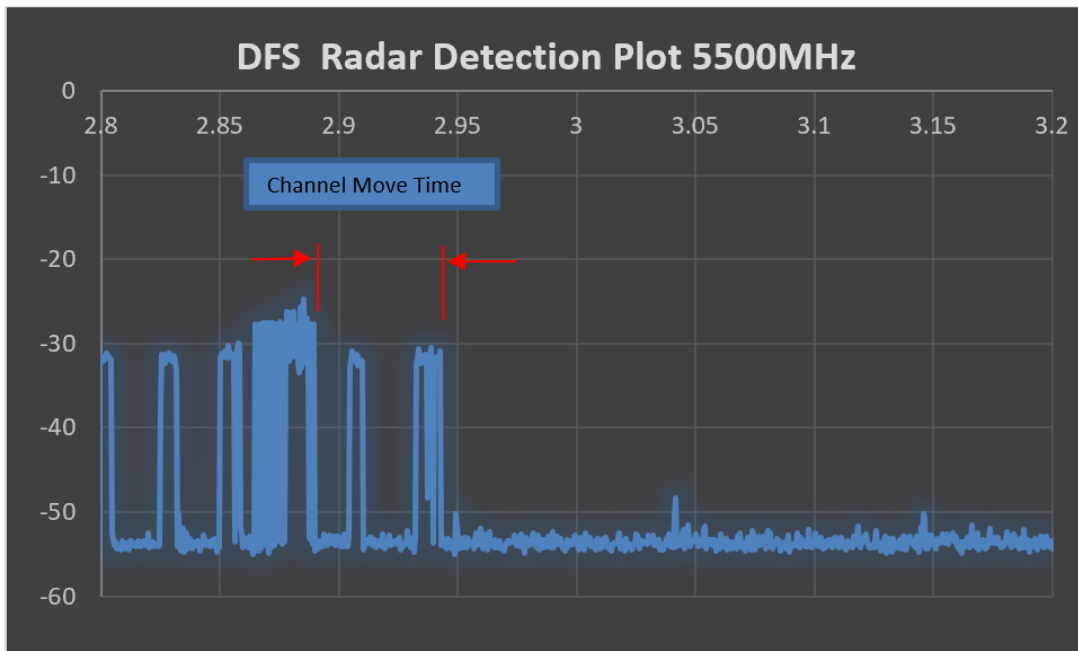


Figure 13. Channel Move Time 5550 MHz

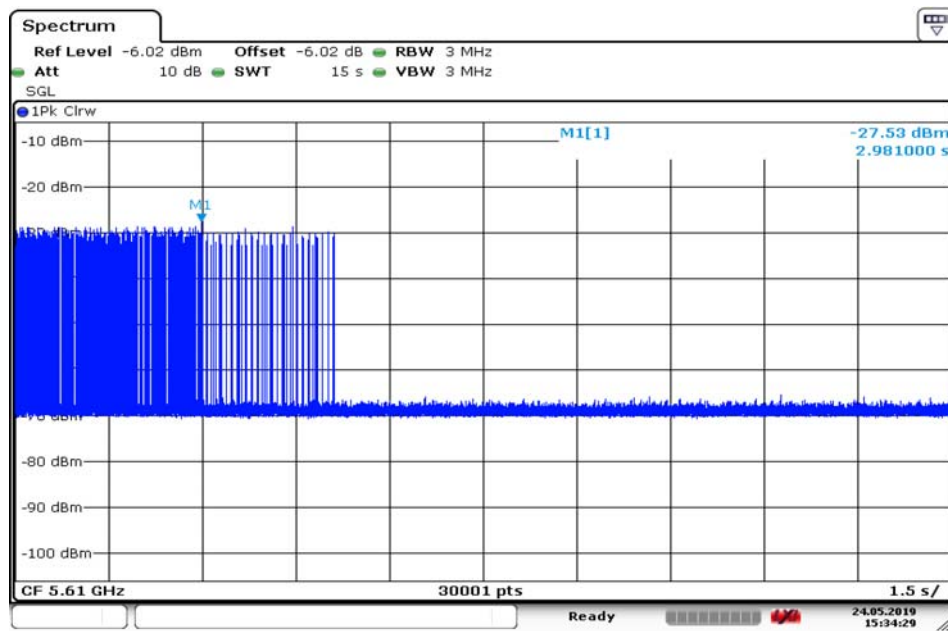


Figure 14. DFS Radar Detection Plot Channel 5610 MHz

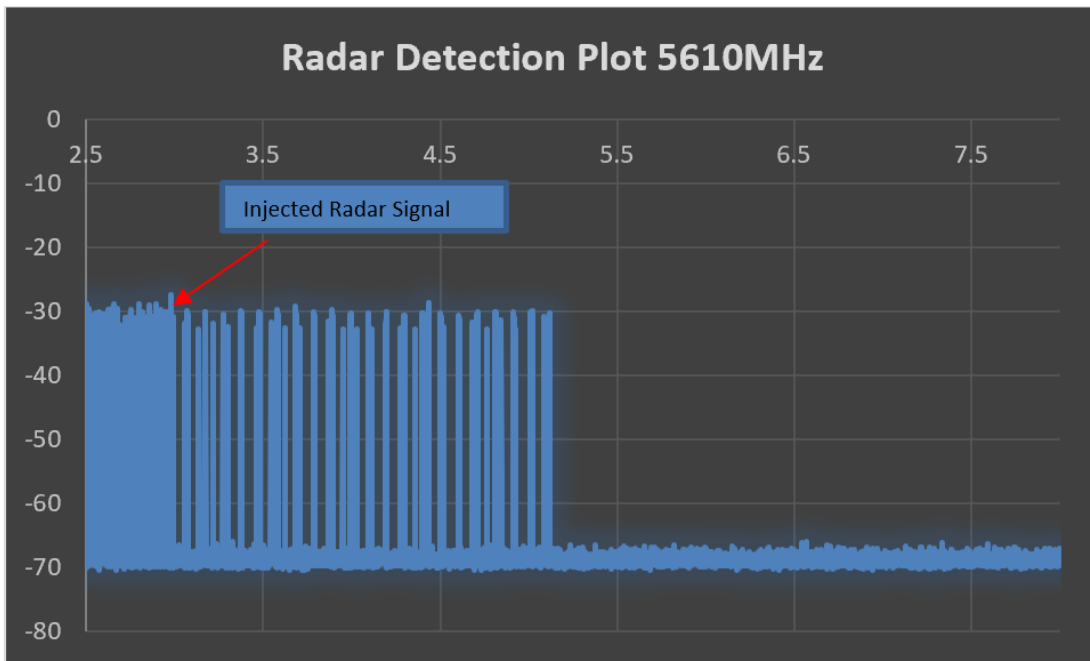


Figure 15. DFS Radar Detection Plot Channel 5610 MHz

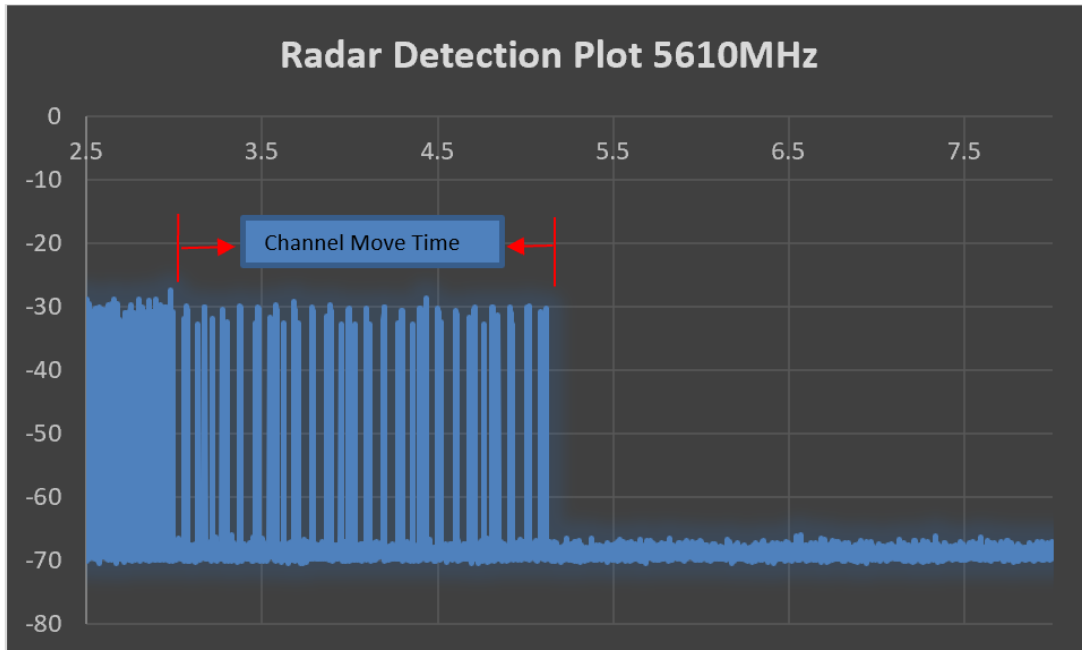


Figure 16. Channel Move Time 5610 MHz

8.2 Channel Closing Transmission Time

8.2.1 Test Requirement:

FCC CFR 47 Rule Part 15.407 (h)(2)(iii)

ISED Canada RSS-247 [6.3]

8.2.2 Test Method:

Measurements were performed according to the procedures defined in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

8.2.3 Limits:

After the radar burst has been applied, the EUT shall cease normal transmission on the channel within 200ms starting at the beginning of the channel move time. Control signaling required to facilitate a channel move (an aggregate of 60ms) over the remaining 10-second period of the channel move time is permissible.

8.2.4 Test Results:

Pass.

The EUT ceased transmission on the channel within the allotted time.

8.2.5 Test Data

| Carrier Frequency (MHz) | Channel Bandwidth (MHz) | Channel Closing Transmission Time (ms) | Channel Closing Transmission Time Limit + Aggregate Control Signaling Time Limit (ms) | Result |
|-------------------------|-------------------------|--|---|--------|
| 5510 | 40 | 0.016 | 200 +60 | Pass |
| 5610 | 80 | 3.5 | 200 +60 | Pass |

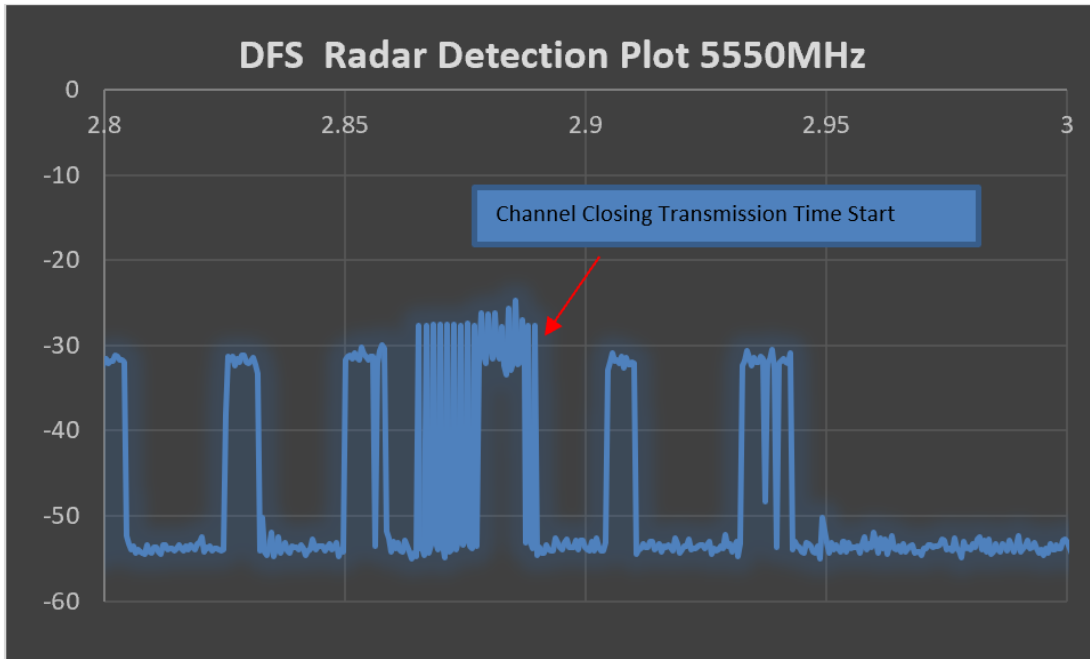


Figure 17. Channel Closing Transmission Time (5550 MHz)

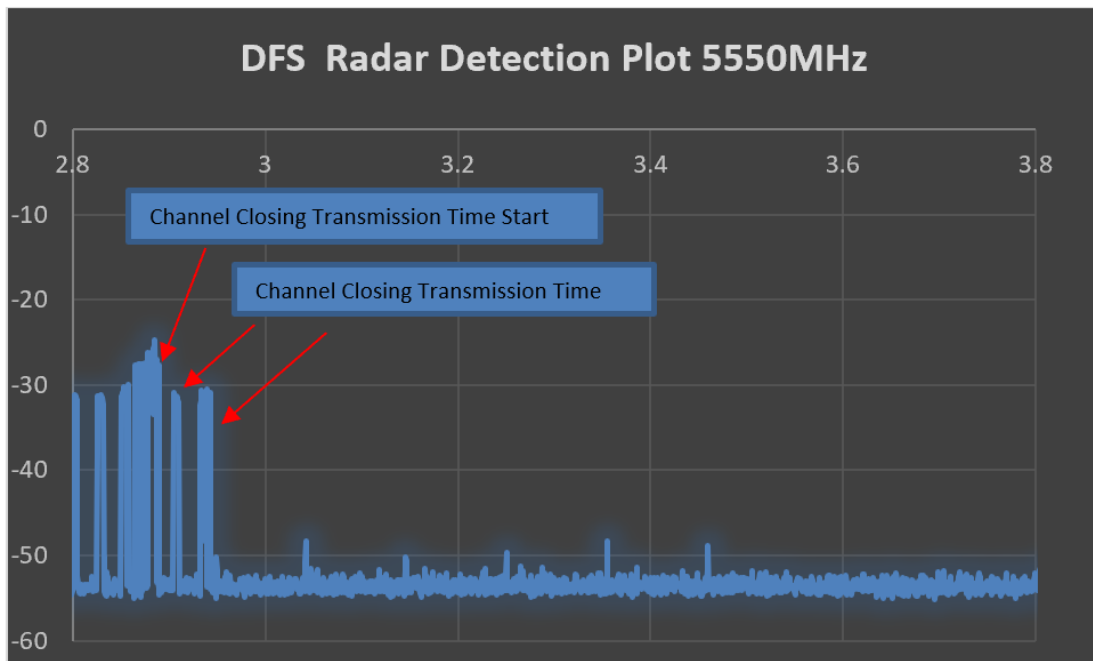


Figure 18. Channel Closing Transmission Time (5550 MHz)

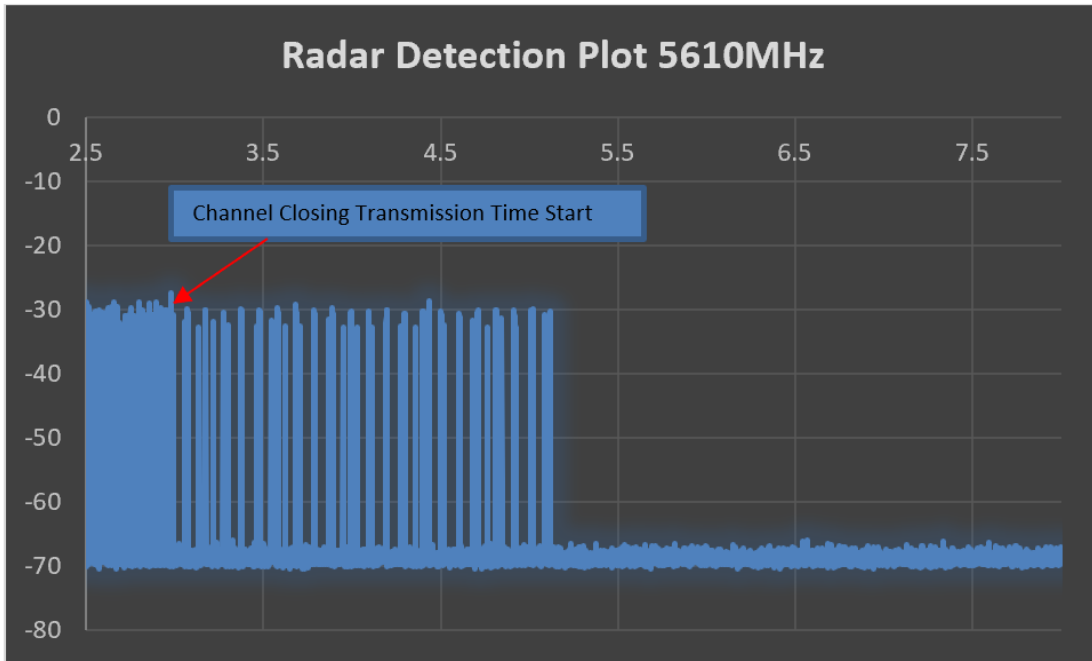


Figure 19. Channel Closing Transmission Time (5610 MHz)

8.3 Non-Occupancy Period

8.3.1 Test Requirement:

FCC CFR 47 Rule Part 15.407 (h)(2)(iv)

ISED Canada RSS-247 [6.3]

8.3.2 Test Method:

Measurements were performed according to the procedures defined in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

8.3.3 Limits:

A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.


8.3.4 Test Results:

Pass.

After radar was detected by the master device, the EUT did not transmit on the tested channel for at least 30 minutes.

8.3.5 Test Data:

Plot shown for 2000 second sweep time.

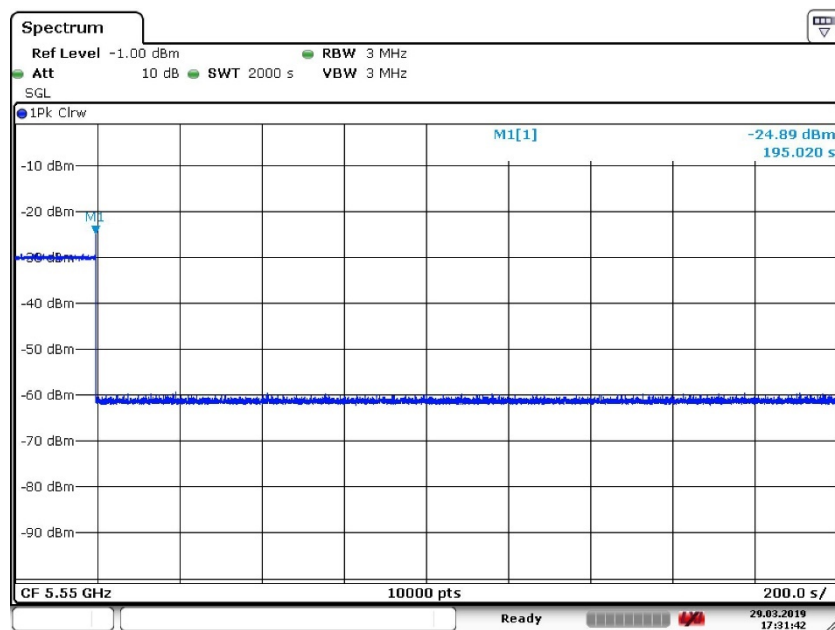

Date: 29.MAR.2019 17:31:43

Figure 21. 30 Minute Non-Occupancy Period (5550 MHz)

End of Report