


**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

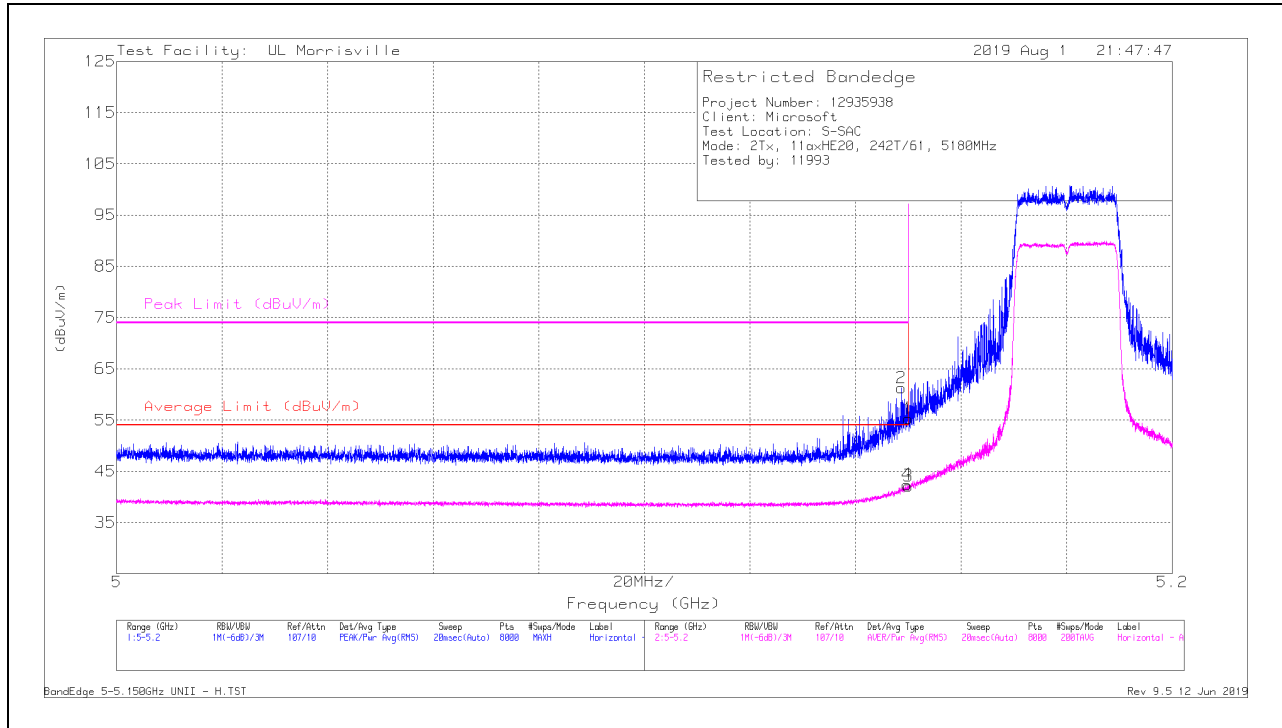

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	43.59	Pk	34.3	-22.6	55.29	-	-	74	-18.71	49	370	H
2	* ** 5.14867	49.59	Pk	34.3	-22.6	61.29	-	-	74	-12.71	49	370	H
3	* ** 5.14999	30.44	RMS	34.3	-22.6	42.14	54	-11.86	-	-	49	370	H
4	* ** 5.14979	30.69	RMS	34.3	-22.6	42.39	54	-11.61	-	-	49	370	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

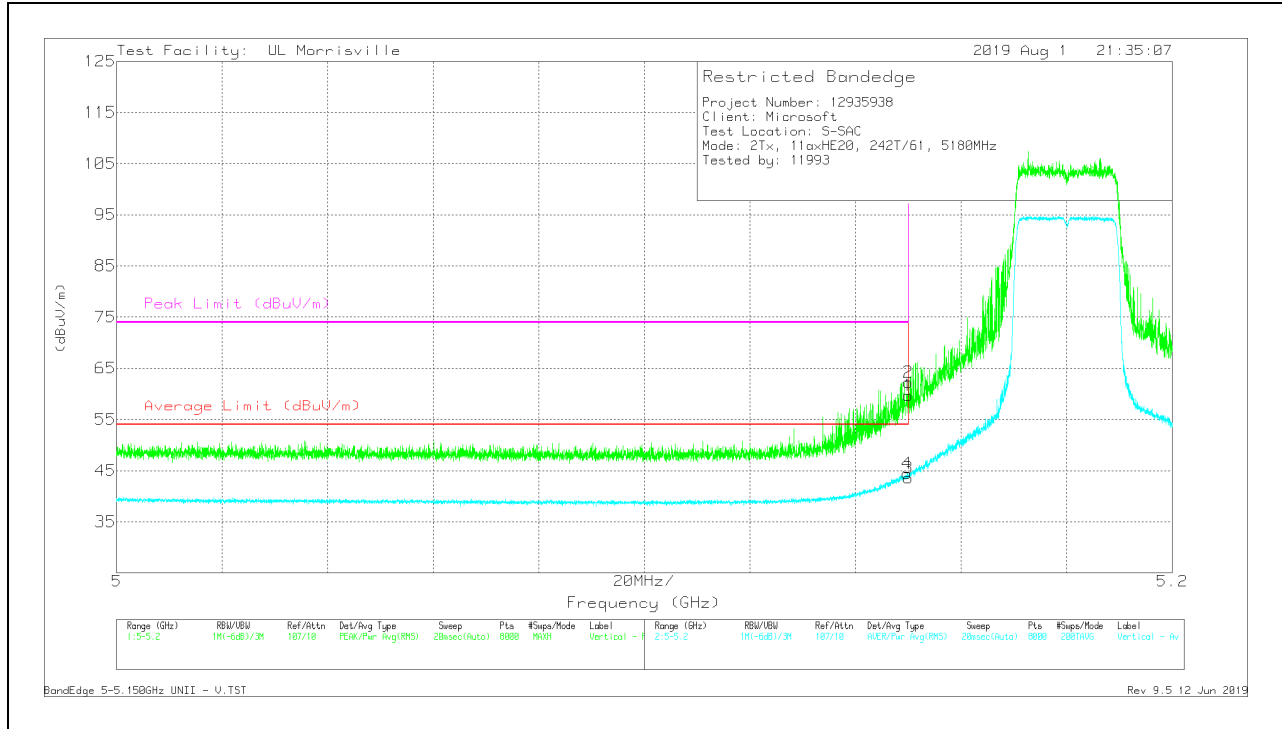


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	47.98	Pk	34.3	-22.6	59.68	-	-	74	-14.32	52	206	V
2	*** 5.14994	50.59	Pk	34.3	-22.6	62.29	-	-	74	-11.71	52	206	V
3	*** 5.14999	31.88	RMS	34.3	-22.6	43.58	54	-10.42	-	-	52	206	V
4	*** 5.14979	32.72	RMS	34.3	-22.6	44.42	54	-9.58	-	-	52	206	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL RESULTS

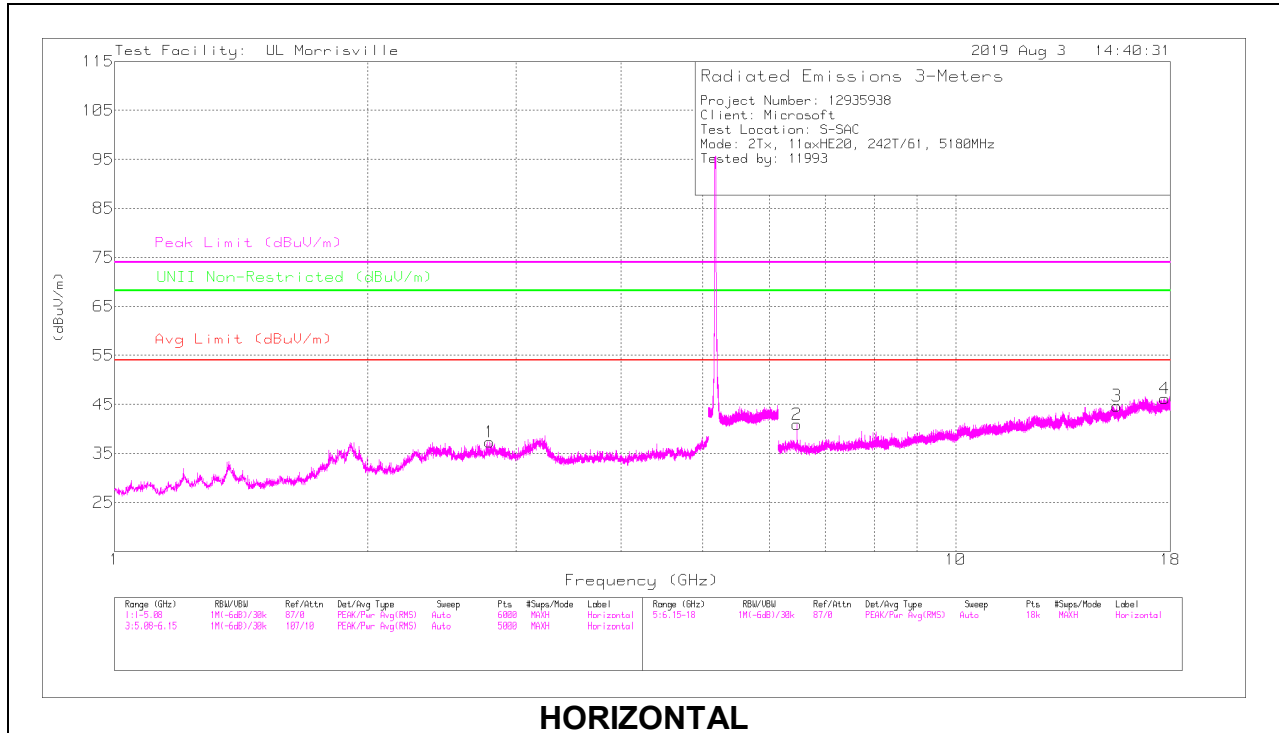

**HORIZONTAL**

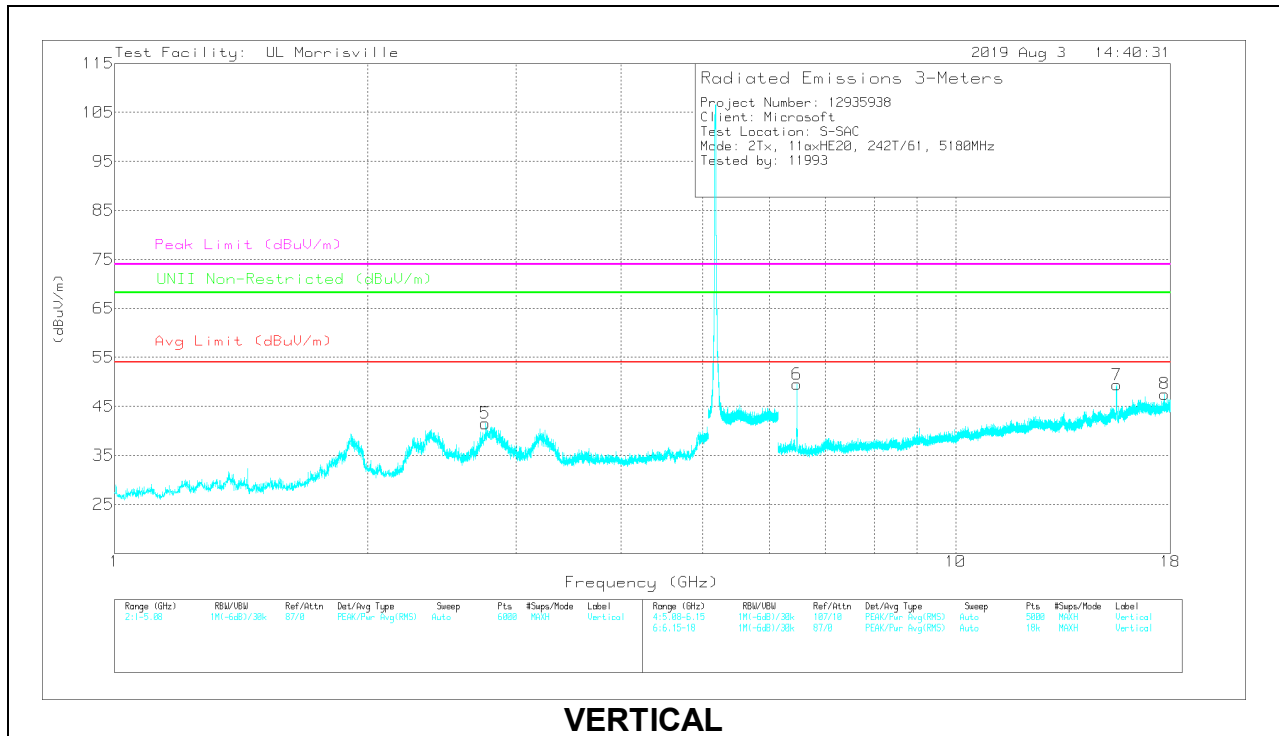

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.79473	46.6	PK-U	32.2	-33.5	45.3	-	-	74	-28.7	-	-	139	133	H
	*** 2.79441	34.35	ADR	32.2	-33.5	33.05	54	-20.95	-	-	-	-	139	133	H
5	*** 2.76064	50.74	PK-U	32.3	-33.5	49.54	-	-	74	-24.46	-	-	101	244	V
	*** 2.7606	39.03	ADR	32.3	-33.5	37.83	54	-16.17	-	-	-	-	101	244	V
3	*** 15.55104	40.87	PK-U	40	-24.5	56.37	-	-	74	-17.63	-	-	300	263	H
	*** 15.55079	27.4	ADR	40	-24.5	42.9	54	-11.1	-	-	-	-	300	263	H
4	*** 17.73281	33.76	PK-U	41.2	-22	52.96	-	-	74	-21.04	-	-	0	275	H
	*** 17.73312	21.9	ADR	41.2	-22	41.1	54	-12.9	-	-	-	-	0	275	H
7	*** 15.54674	43.75	PK-U	40	-24.5	59.25	-	-	74	-14.75	-	-	29	292	V
	*** 15.54679	30.32	ADR	40	-24.5	45.82	54	-8.18	-	-	-	-	29	292	V
8	*** 17.72982	33.71	PK-U	41.2	-22	52.91	-	-	74	-21.09	-	-	280	317	V
	*** 17.73009	21.67	ADR	41.2	-22	40.87	54	-13.13	-	-	-	-	280	317	V
2	6.47509	42.1	PK-U	35.5	-28.6	49	-	-	-	-	68.2	-19.2	292	378	H
6	6.47514	47.91	PK-U	35.5	-28.6	54.81	-	-	-	-	68.2	-13.39	48	234	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

PK - Peak detector

### MID CHANNEL RESULTS

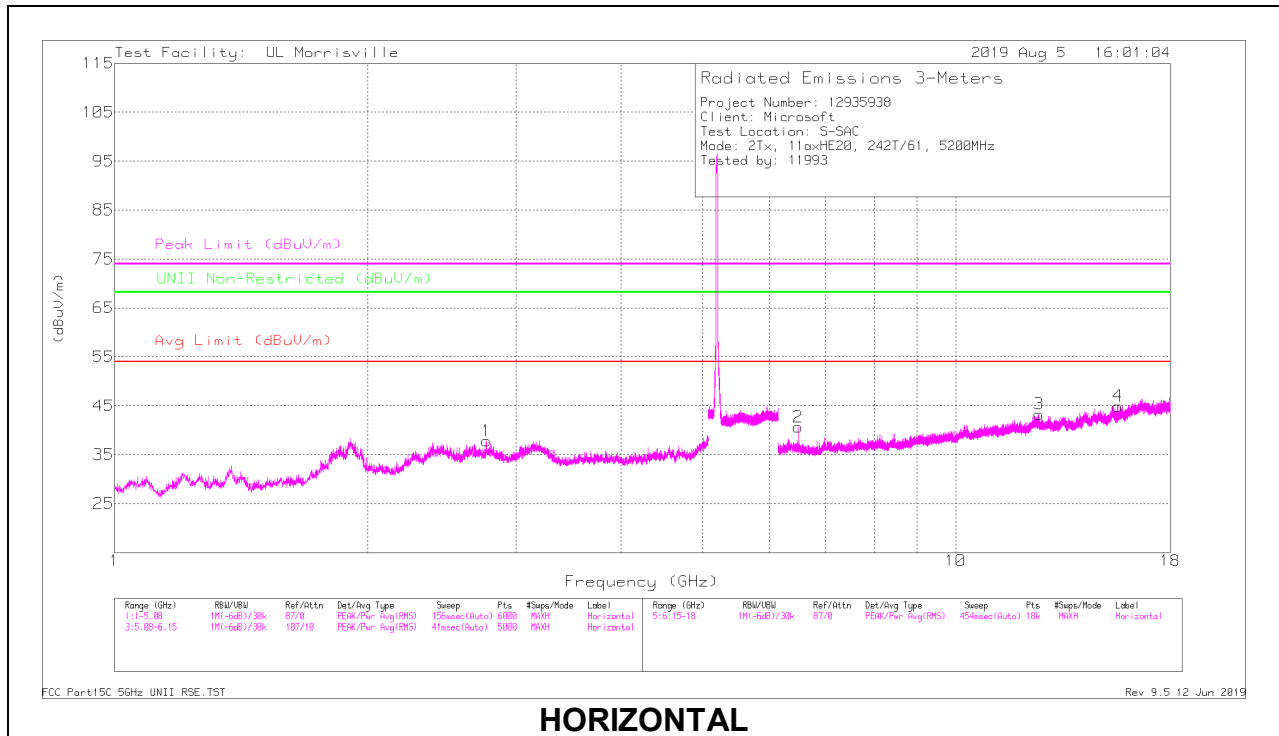

**HORIZONTAL**

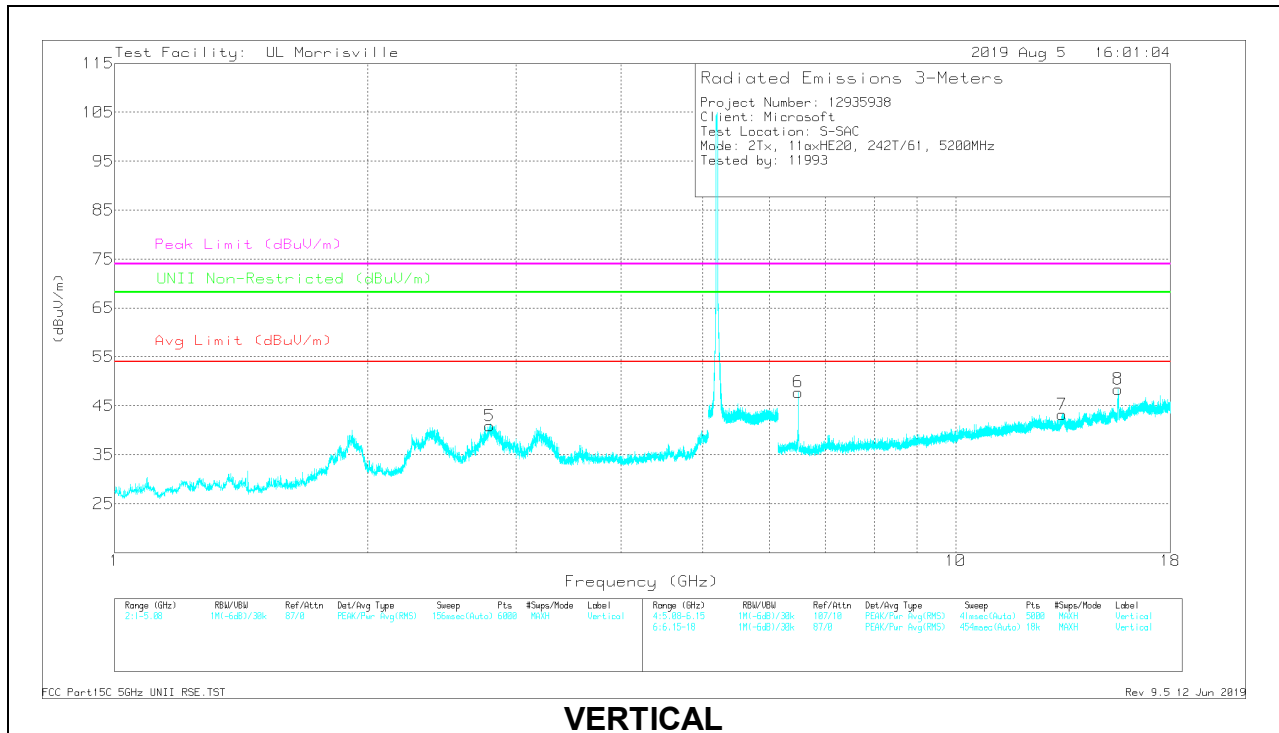

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.76737	46.63	PK-U	32.2	-33.5	45.33	-	-	74	-28.67	-	-	142	139	H
	*** 2.76709	34.59	ADR	32.2	-33.5	33.29	54	-20.71	-	-	-	-	142	139	H
5	*** 2.7926	51.41	PK-U	32.2	-33.5	50.11	-	-	74	-23.89	-	-	101	234	V
	*** 2.79293	39.98	ADR	32.2	-33.5	38.68	54	-15.32	-	-	-	-	101	234	V
3	*** 12.55556	34.45	PK-U	39	-24.1	49.35	-	-	74	-24.65	-	-	342	355	H
	*** 12.55647	21.98	ADR	39	-24.1	36.88	54	-17.12	-	-	-	-	342	355	H
4	*** 15.59501	40.5	PK-U	40	-24.4	56.1	-	-	74	-17.9	-	-	301	268	H
	*** 15.59517	27.91	ADR	40	-24.4	43.51	54	-10.49	-	-	-	-	301	268	H
7	*** 13.3814	34.13	PK-U	39	-23.8	49.33	-	-	74	-24.67	-	-	26	158	V
	*** 13.38152	22.31	ADR	39	-23.8	37.51	54	-16.49	-	-	-	-	26	158	V
8	*** 15.60007	43.11	PK-U	40	-24.3	58.81	-	-	74	-15.19	-	-	29	293	V
	*** 15.59999	30.69	ADR	40	-24.3	46.39	54	-7.61	-	-	-	-	29	293	V
2	6.50009	46.64	PK-U	35.5	-28.5	53.64	-	-	-	-	68.2	-14.56	31	248	V
6	6.50013	39.06	PK-U	35.5	-28.5	46.06	-	-	-	-	68.2	-22.14	295	377	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

Pk - Peak detector

### HIGH CHANNEL RESULTS

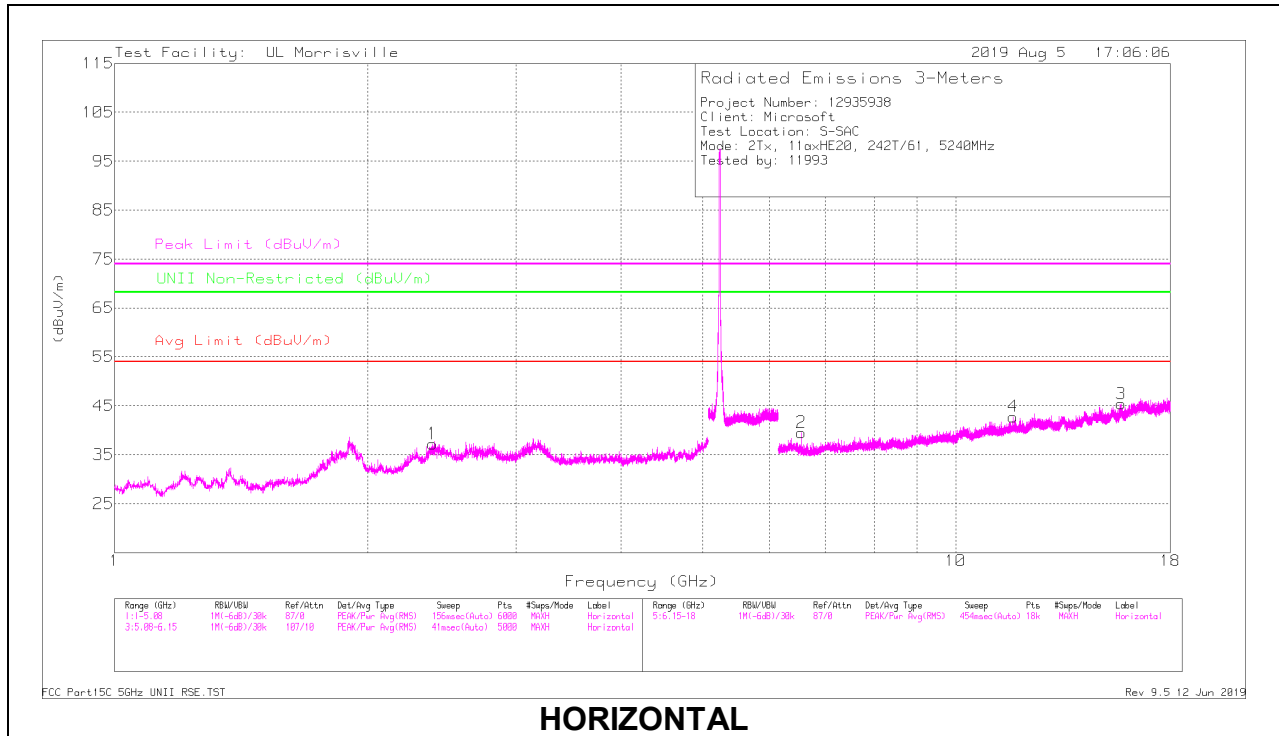

**HORIZONTAL**

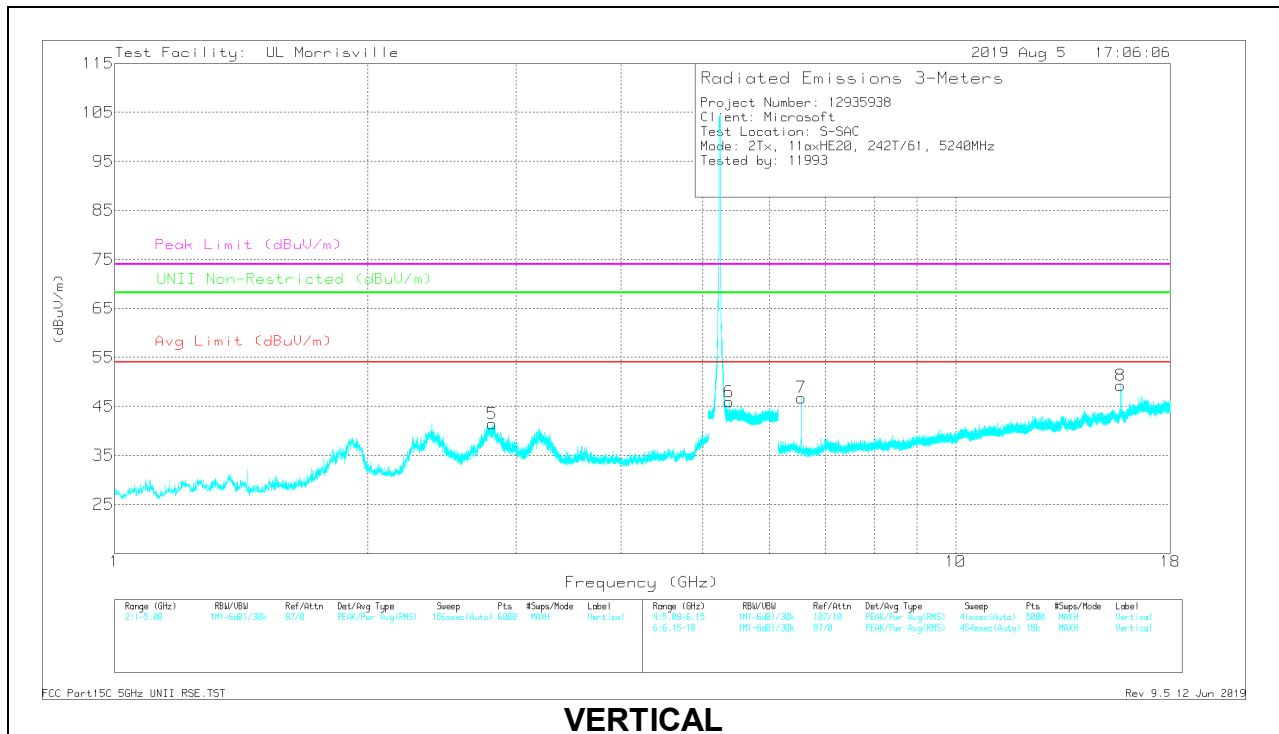

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.3872	47.77	PK-U	31.9	-33.9	45.77	-	-	74	-28.23	-	-	355	105	H
	*** 2.38644	35.61	ADR	31.9	-33.9	33.61	54	-20.39	-	-	-	-	355	105	H
5	*** 2.81003	52.58	PK-U	32.1	-33.5	51.18	-	-	74	-22.82	-	-	100	234	V
	*** 2.81097	40.62	ADR	32.1	-33.5	39.22	54	-14.78	-	-	-	-	100	234	V
6	*** 5.37939	40.59	PK-U	34.4	-23.2	51.79	-	-	74	-22.21	-	-	0	228	V
	*** 5.37969	28.66	ADR	34.4	-23.2	39.86	54	-14.14	-	-	-	-	0	228	V
3	*** 15.72732	41.15	PK-U	40.3	-22.8	58.65	-	-	74	-15.35	-	-	334	296	H
	*** 15.72703	28.28	ADR	40.3	-22.8	45.78	54	-8.22	-	-	-	-	334	296	H
4	*** 11.71328	33.79	PK-U	38.4	-24.1	48.09	-	-	74	-25.91	-	-	11	362	H
	*** 11.71283	21.92	ADR	38.4	-24.1	36.22	54	-17.78	-	-	-	-	11	362	H
8	*** 15.71546	42.57	PK-U	40.2	-22.8	59.97	-	-	74	-14.03	-	-	23	277	V
	*** 15.71636	30.49	ADR	40.2	-22.8	47.89	54	-6.11	-	-	-	-	23	277	V
2	6.54986	41.76	PK-U	35.5	-28.8	48.46	-	-	-	-	68.2	-19.74	324	400	H
7	6.55003	46.5	PK-U	35.5	-28.8	53.2	-	-	-	-	68.2	-15	53	251	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


Pk - Peak detector



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

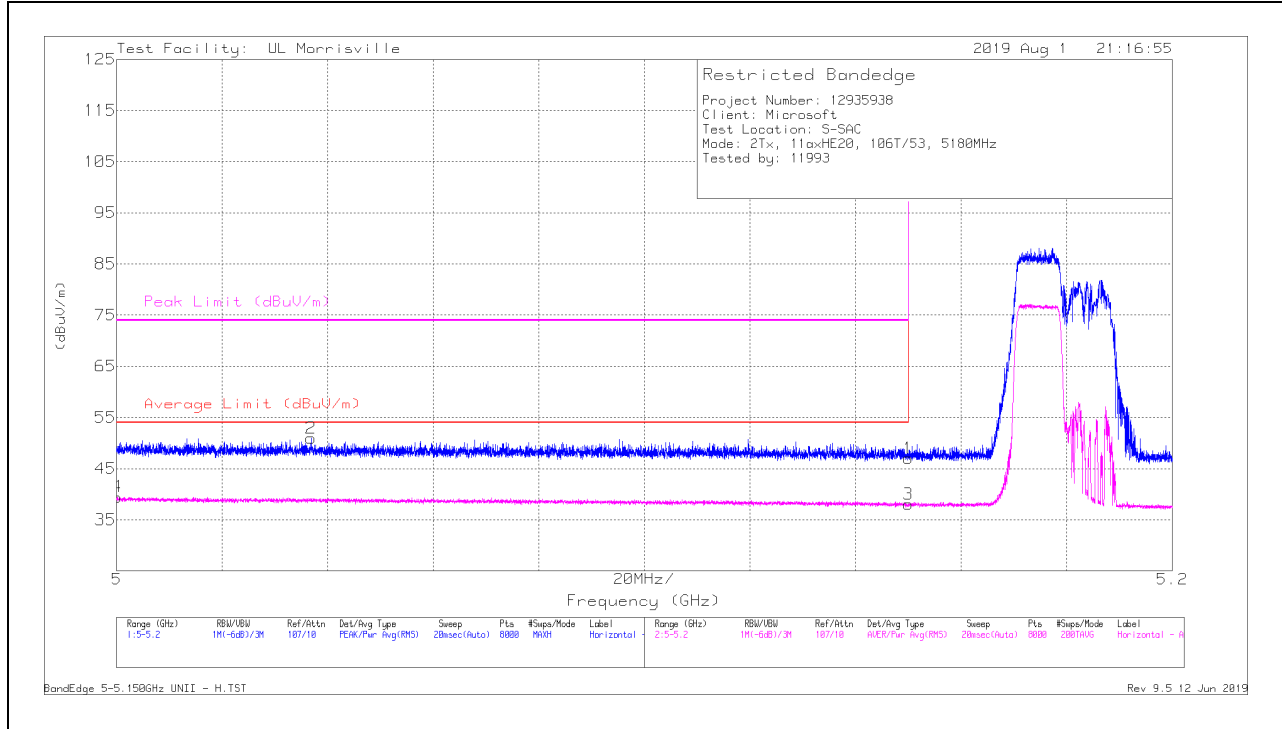

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	35.34	Pk	34.3	-22.6	47.04	-	-	74	-26.96	53	344	H
2	* ** 5.03683	39.13	Pk	34.2	-22.4	50.93	-	-	74	-23.07	53	344	H
3	* ** 5.14999	26.37	RMS	34.3	-22.6	38.07	54	-15.93	-	-	53	344	H
4	* ** 5.00005	27.47	RMS	34.2	-22.2	39.47	54	-14.53	-	-	53	344	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

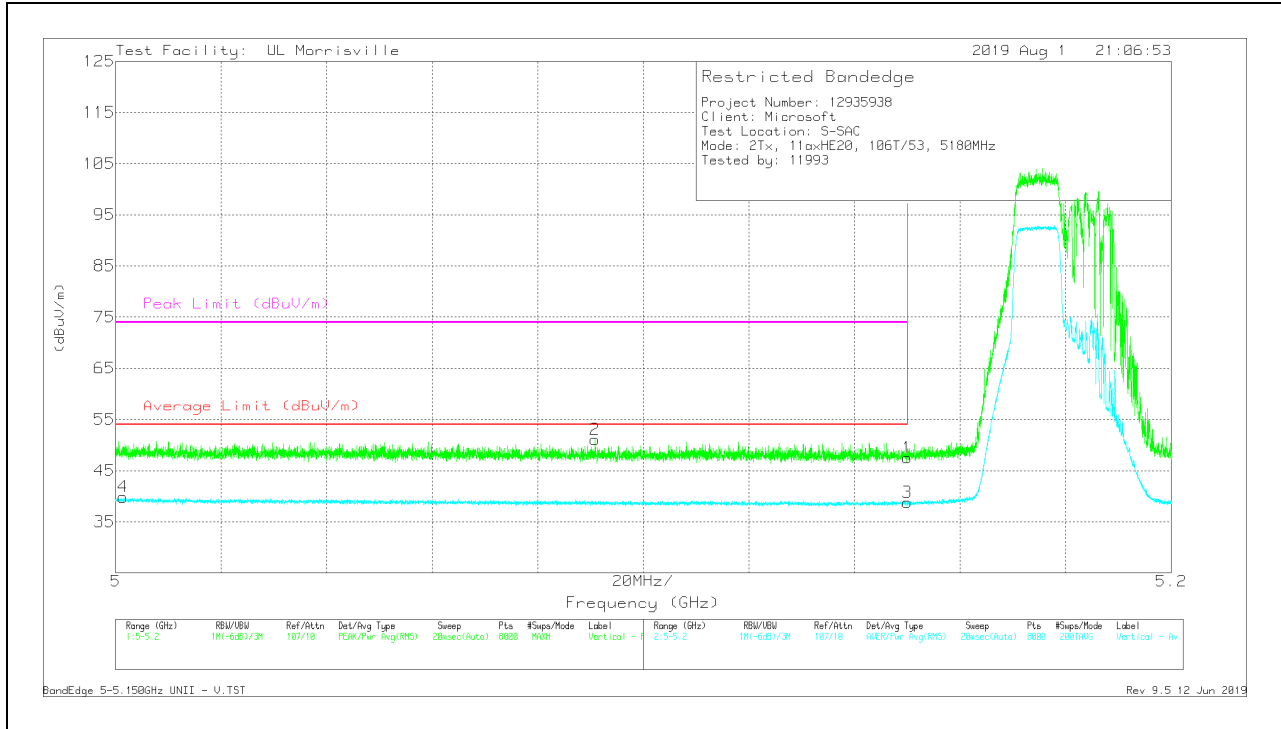


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	35.83	Pk	34.3	-22.6	47.53	-	-	74	-26.47	43	341	V
2	* ** 5.09084	39.5	Pk	34.2	-22.6	51.1	-	-	74	-22.9	43	341	V
3	* ** 5.14999	27.07	RMS	34.3	-22.6	38.77	54	-15.23	-	-	43	341	V
4	* ** 5.00143	27.84	RMS	34.2	-22.2	39.84	54	-14.16	-	-	43	341	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

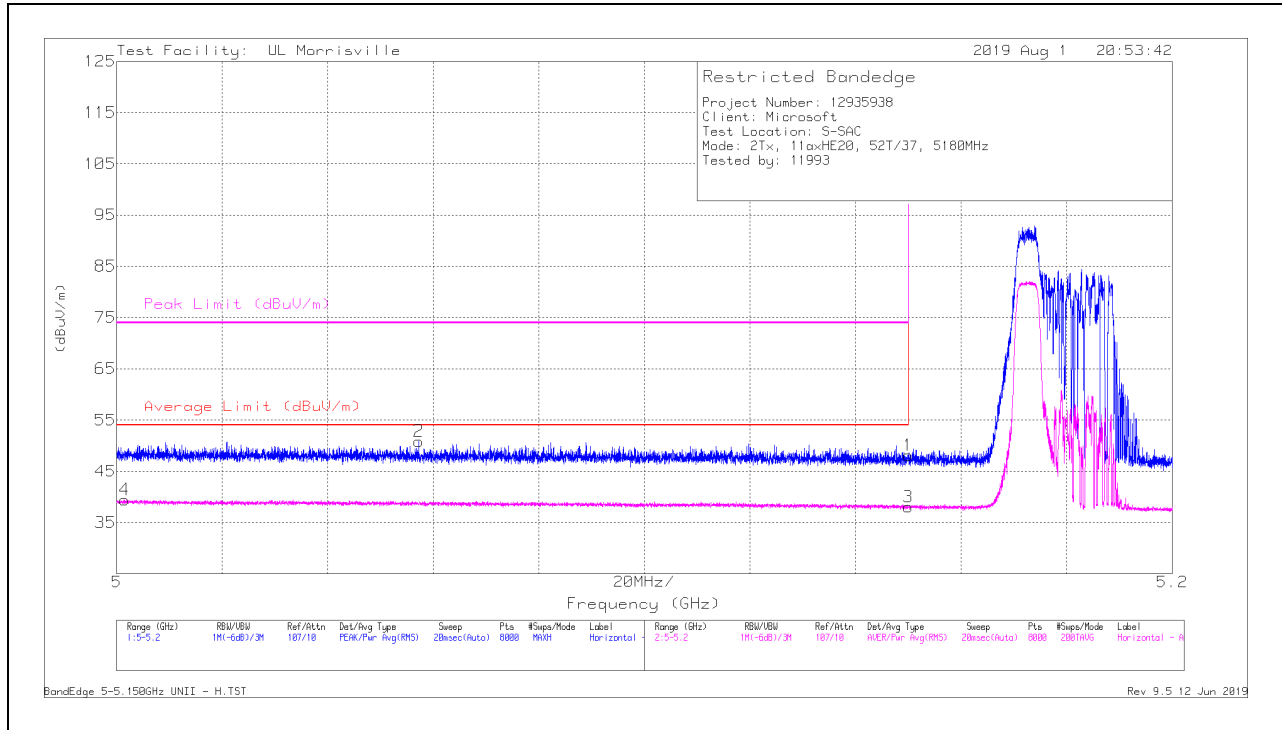

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	36.42	Pk	34.3	-22.6	48.12	-	-	74	-25.88	332	224	H
2	* ** 5.05726	39.17	Pk	34.2	-22.5	50.87	-	-	74	-23.13	332	224	H
3	* ** 5.14999	26.32	RMS	34.3	-22.6	38.02	54	-15.98	-	-	332	224	H
4	* ** 5.00158	27.44	RMS	34.2	-22.2	39.44	54	-14.56	-	-	332	224	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

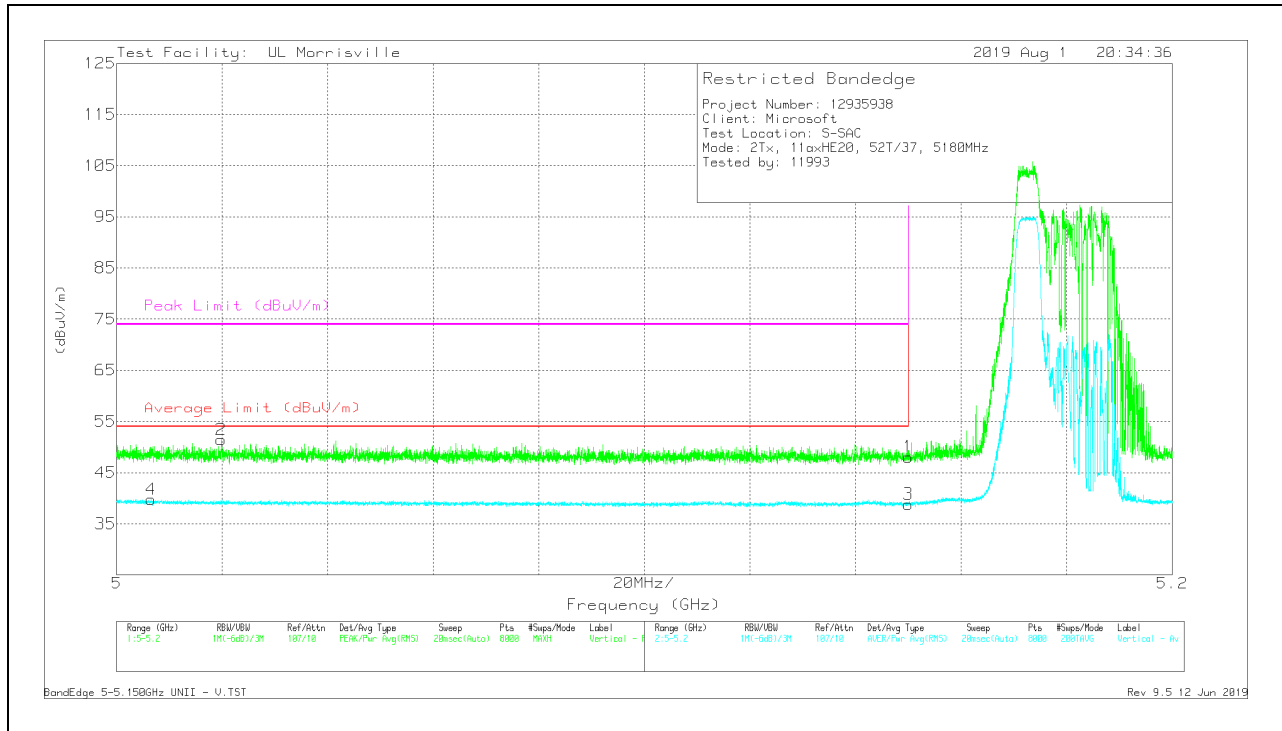


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	36.37	Pk	34.3	-22.6	48.07	-	-	74	-25.93	57	227	V
2	*** 5.0198	39.54	Pk	34.2	-22.3	51.44	-	-	74	-22.56	57	227	V
3	*** 5.14999	27.14	RMS	34.3	-22.6	38.84	54	-15.16	-	-	57	227	V
4	*** 5.00655	27.75	RMS	34.2	-22.2	39.75	54	-14.25	-	-	57	227	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

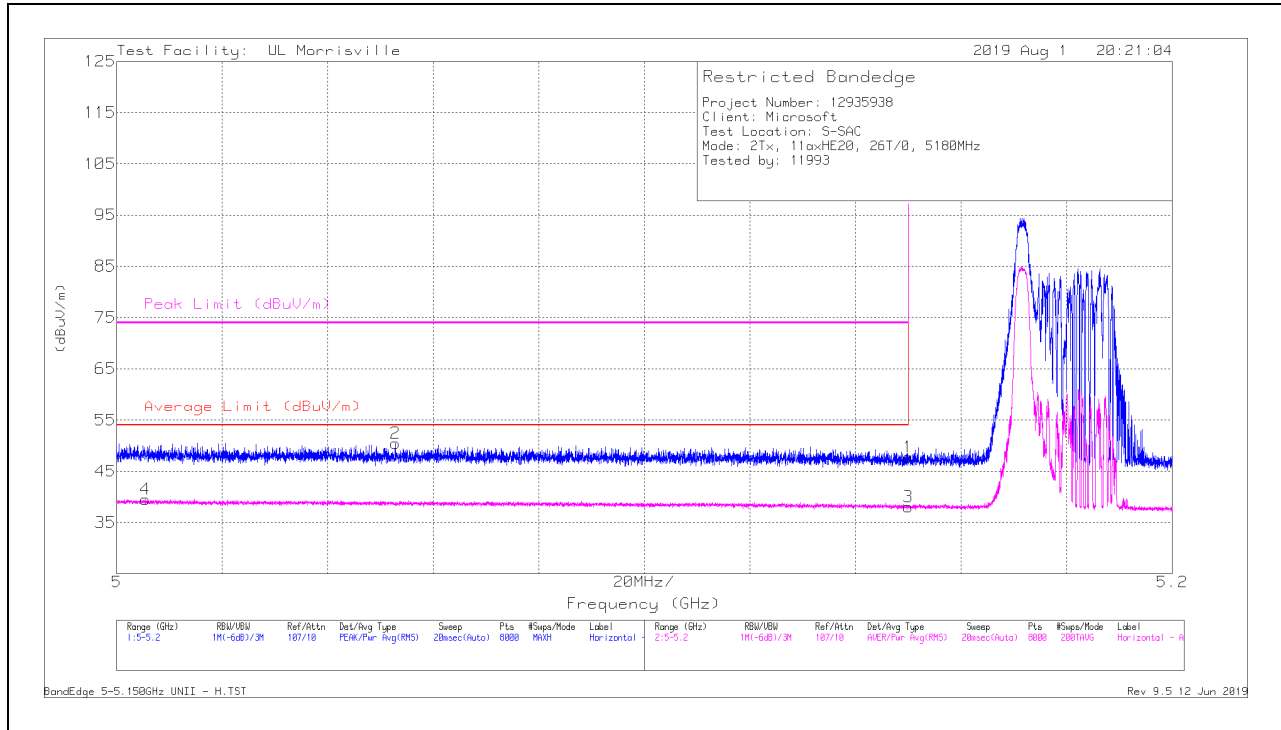

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	36.08	Pk	34.3	-22.6	47.78	-	-	74	-26.22	50	145	H
2	* ** 5.05286	38.76	Pk	34.2	-22.5	50.46	-	-	74	-23.54	50	145	H
3	* ** 5.14999	26.34	RMS	34.3	-22.6	38.04	54	-15.96	-	-	50	145	H
4	* ** 5.0055	27.51	RMS	34.2	-22.2	39.51	54	-14.49	-	-	50	145	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

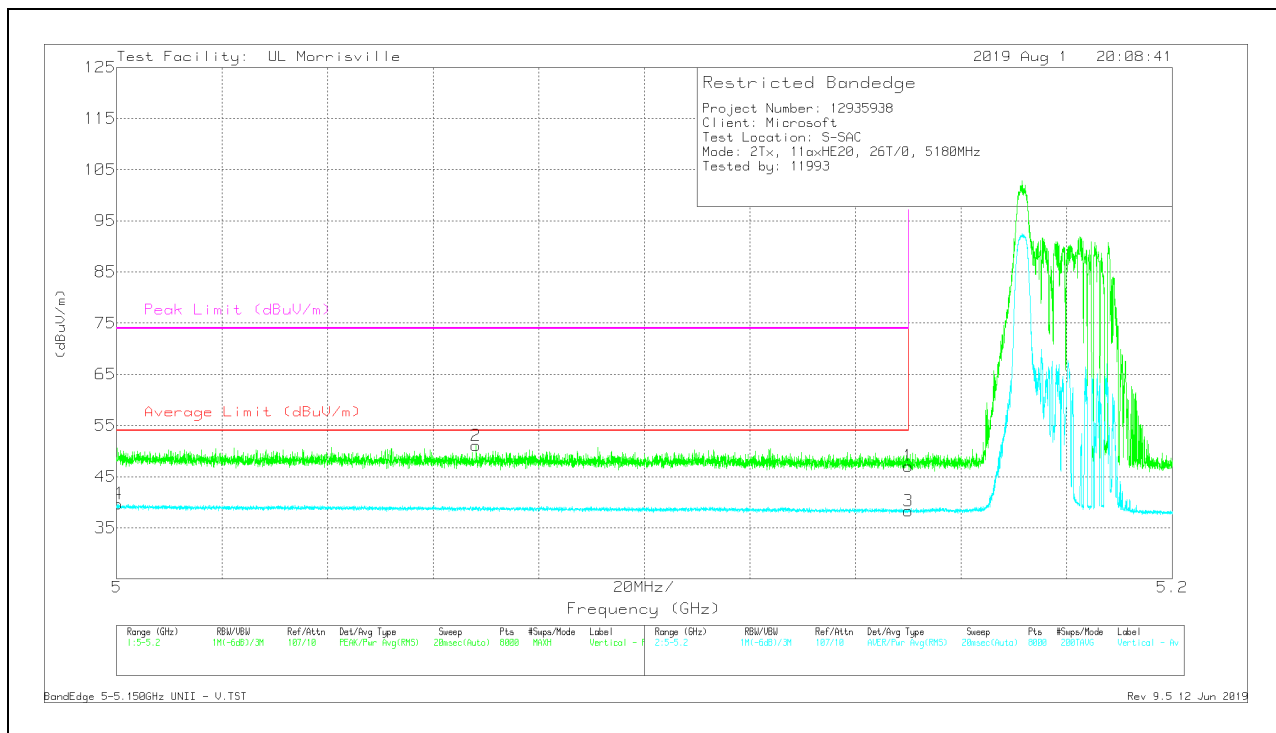

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	35.39	Pk	34.3	-22.6	47.09	-	-	74	-26.91	353	200	V
2	* ** 5.06806	39.37	Pk	34.2	-22.5	51.07	-	-	74	-22.93	353	200	V
3	* ** 5.14999	26.56	RMS	34.3	-22.6	38.26	54	-15.74	-	-	353	200	V
4	* ** 5.00018	27.7	RMS	34.2	-22.2	39.7	54	-14.3	-	-	353	200	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.1.2. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.2 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – SU MODE

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

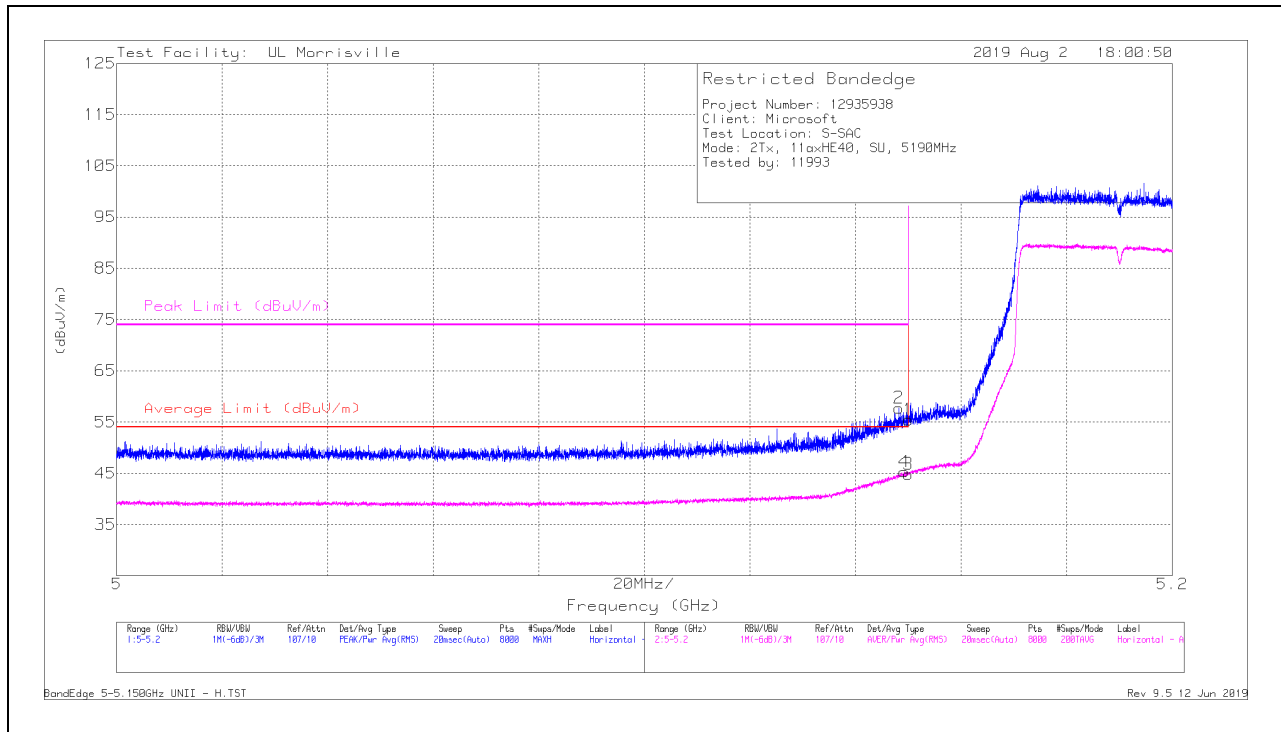

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	43.76	Pk	34.3	-22.6	55.46	-	-	74	-18.54	55	381	H
2	*** 5.14819	46.06	Pk	34.3	-22.6	57.76	-	-	74	-16.24	55	381	H
3	*** 5.14999	33.15	RMS	34.3	-22.6	44.85	54	-9.15	-	-	55	381	H
4	*** 5.14922	33.57	RMS	34.3	-22.6	45.27	54	-8.73	-	-	55	381	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

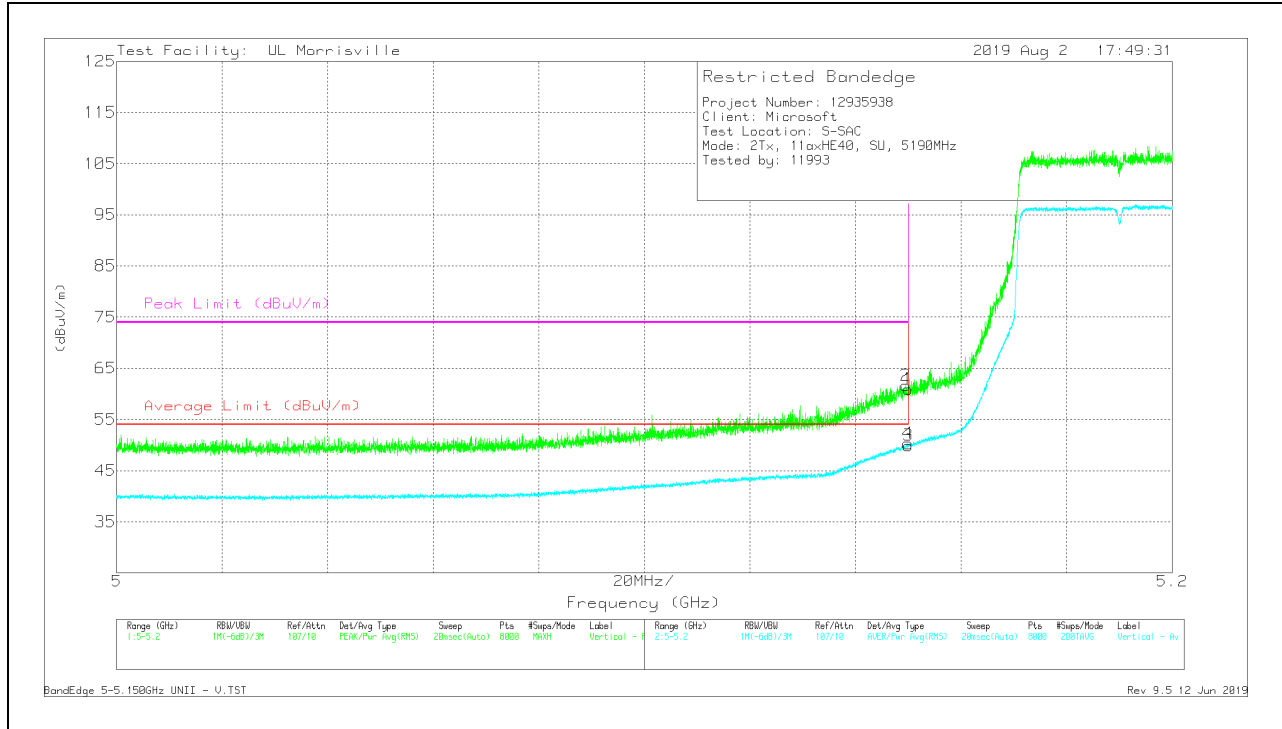

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	49.27	Pk	34.3	-22.6	60.97	-	-	74	-13.03	10	294	V
2	* ** 5.14954	49.94	Pk	34.3	-22.6	61.64	-	-	74	-12.36	10	294	V
3	* ** 5.14999	38.21	RMS	34.3	-22.6	49.91	54	-4.09	-	-	10	294	V
4	* ** 5.14992	38.59	RMS	34.3	-22.6	50.29	54	-3.71	-	-	10	294	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

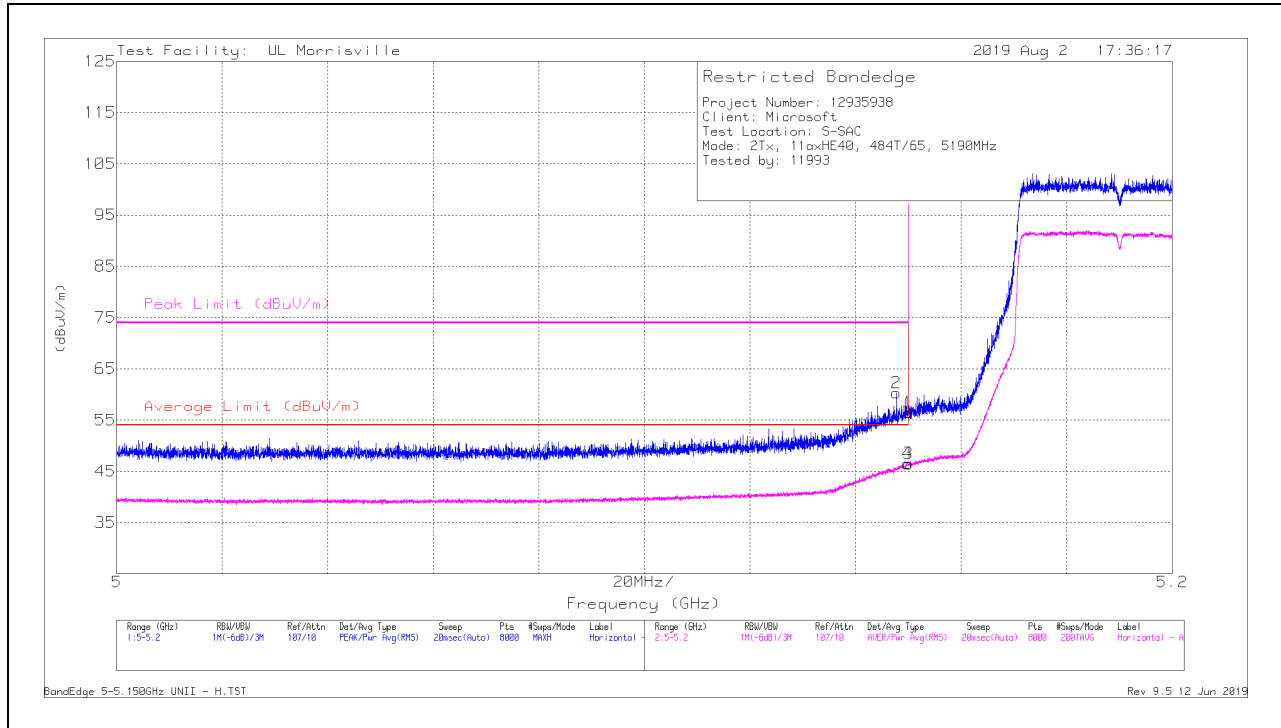

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	44.77	Pk	34.3	-22.6	56.47	-	-	74	-17.53	49	384	H
2	* ** 5.14774	48.59	Pk	34.3	-22.6	60.29	-	-	74	-13.71	49	384	H
3	* ** 5.14999	34.77	RMS	34.3	-22.6	46.47	54	-7.53	-	-	49	384	H
4	* ** 5.14984	34.87	RMS	34.3	-22.6	46.57	54	-7.43	-	-	49	384	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

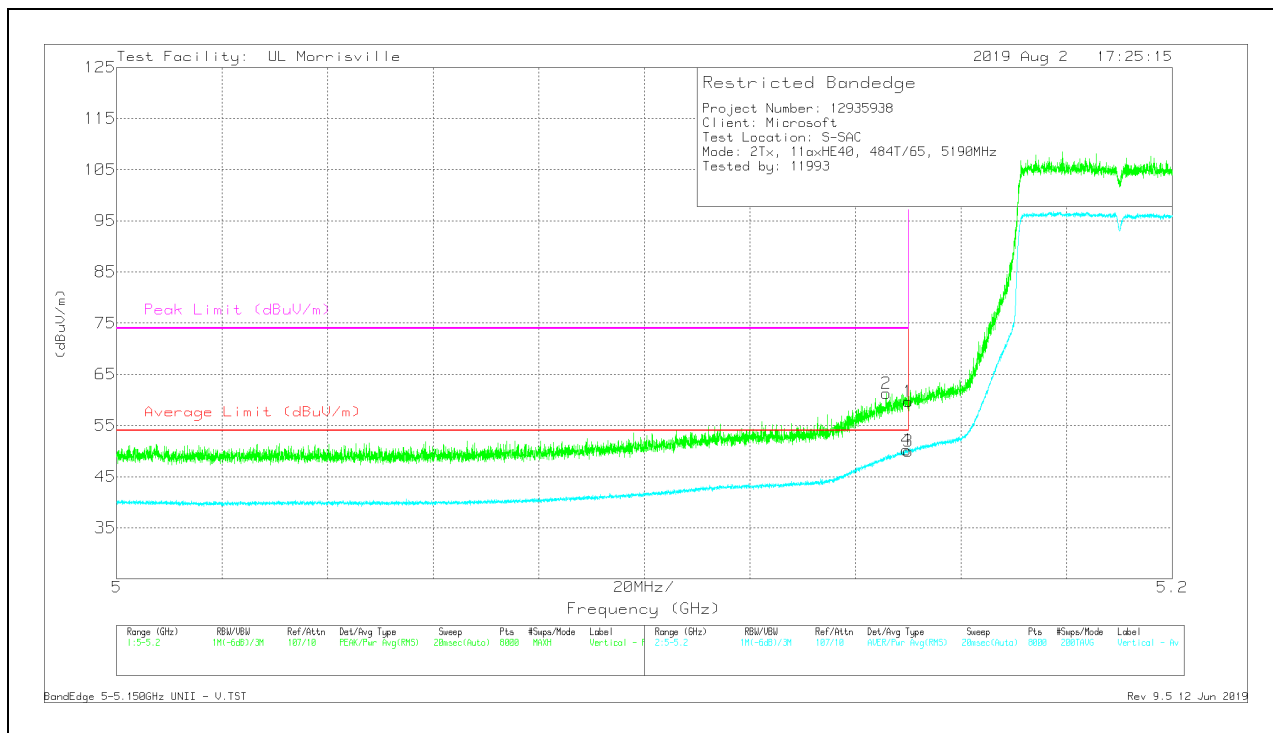


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	47.97	Pk	34.3	-22.6	59.67	-	-	74	-14.33	19	301	V
2	* ** 5.14577	49.56	Pk	34.3	-22.6	61.26	-	-	74	-12.74	19	301	V
3	* ** 5.14999	38.27	RMS	34.3	-22.6	49.97	54	-4.03	-	-	19	301	V
4	* ** 5.14964	38.51	RMS	34.3	-22.6	50.21	54	-3.79	-	-	19	301	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

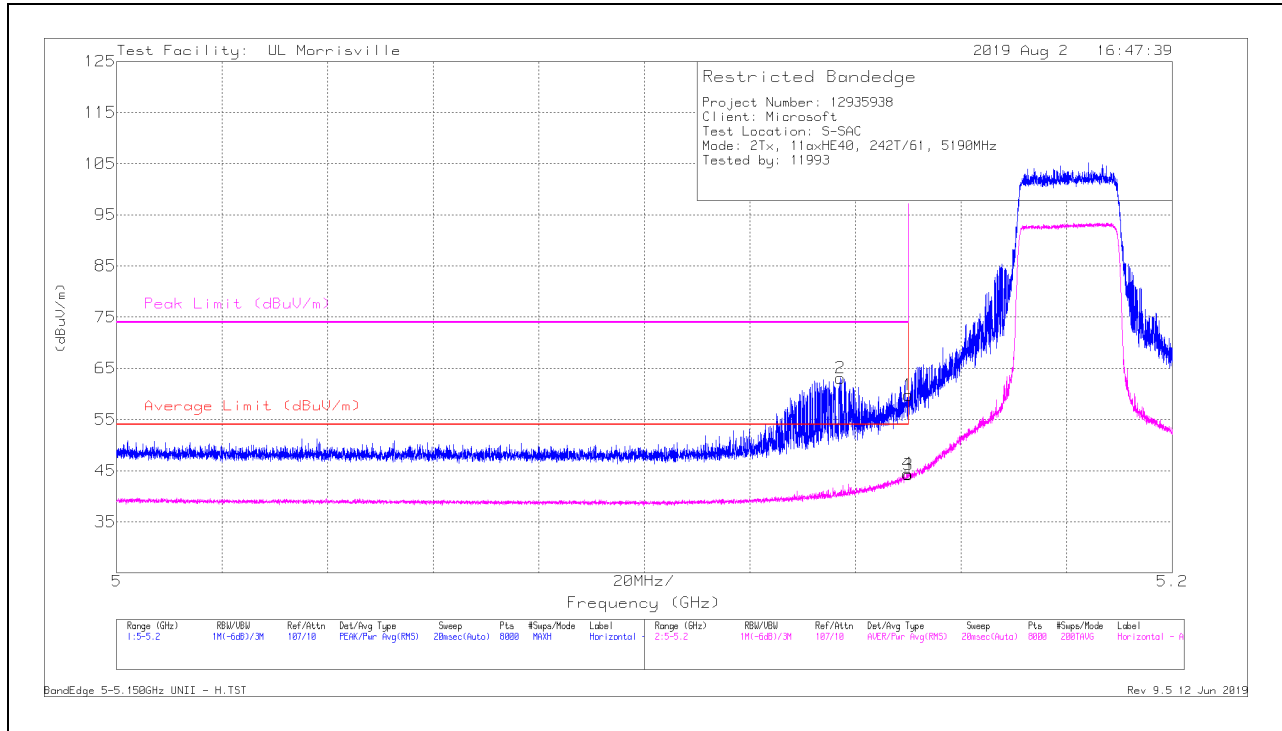

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14997	48.06	Pk	34.3	-22.6	59.76	-	-	74	-14.24	22	352	H
2	* ** 5.13714	51.38	Pk	34.2	-22.5	63.08	-	-	74	-10.92	22	352	H
3	* ** 5.14999	32.51	RMS	34.3	-22.6	44.21	54	-9.79	-	-	22	352	H
4	* ** 5.14982	32.69	RMS	34.3	-22.6	44.39	54	-9.61	-	-	22	352	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

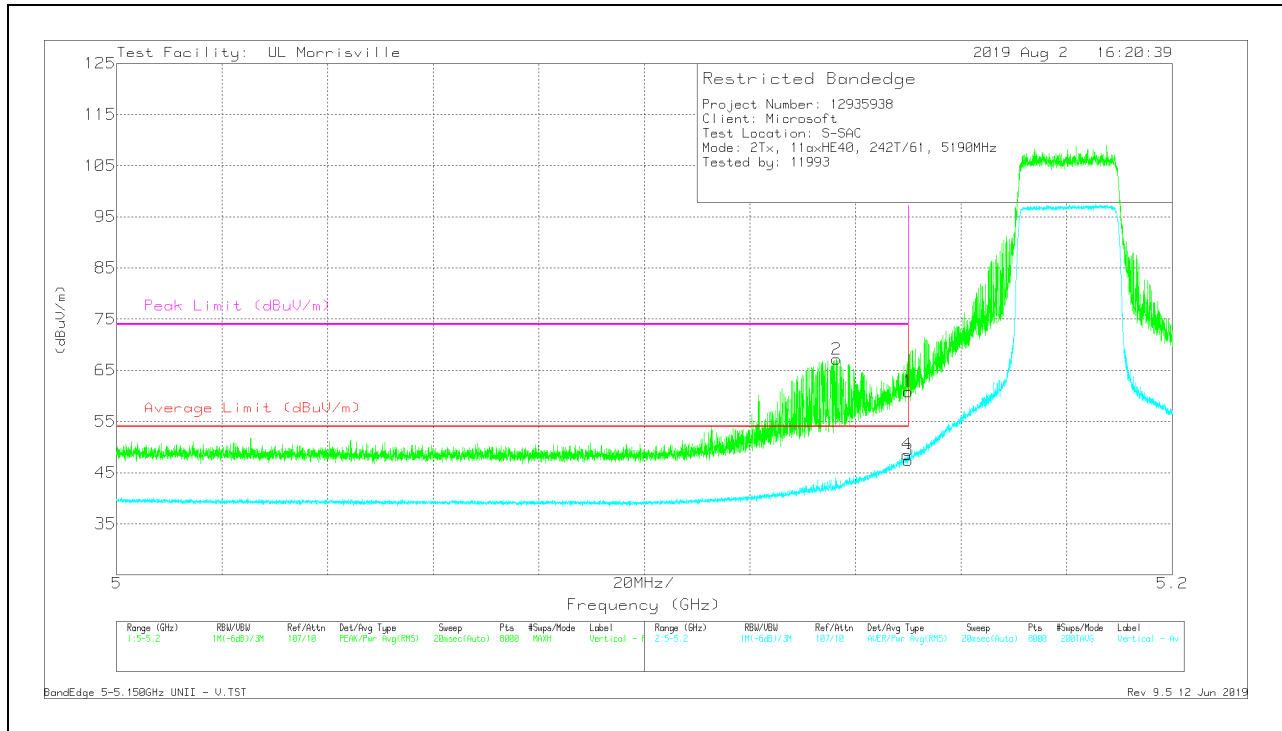


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	49.13	Pk	34.3	-22.6	60.83	-	-	74	-13.17	52	247	V
2	* ** 5.13639	55.5	Pk	34.2	-22.5	67.2	-	-	74	-6.8	52	247	V
3	* ** 5.14999	35.75	RMS	34.3	-22.6	47.45	54	-6.55	-	-	52	247	V
4	* ** 5.14979	36.86	RMS	34.3	-22.6	48.56	54	-5.44	-	-	52	247	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

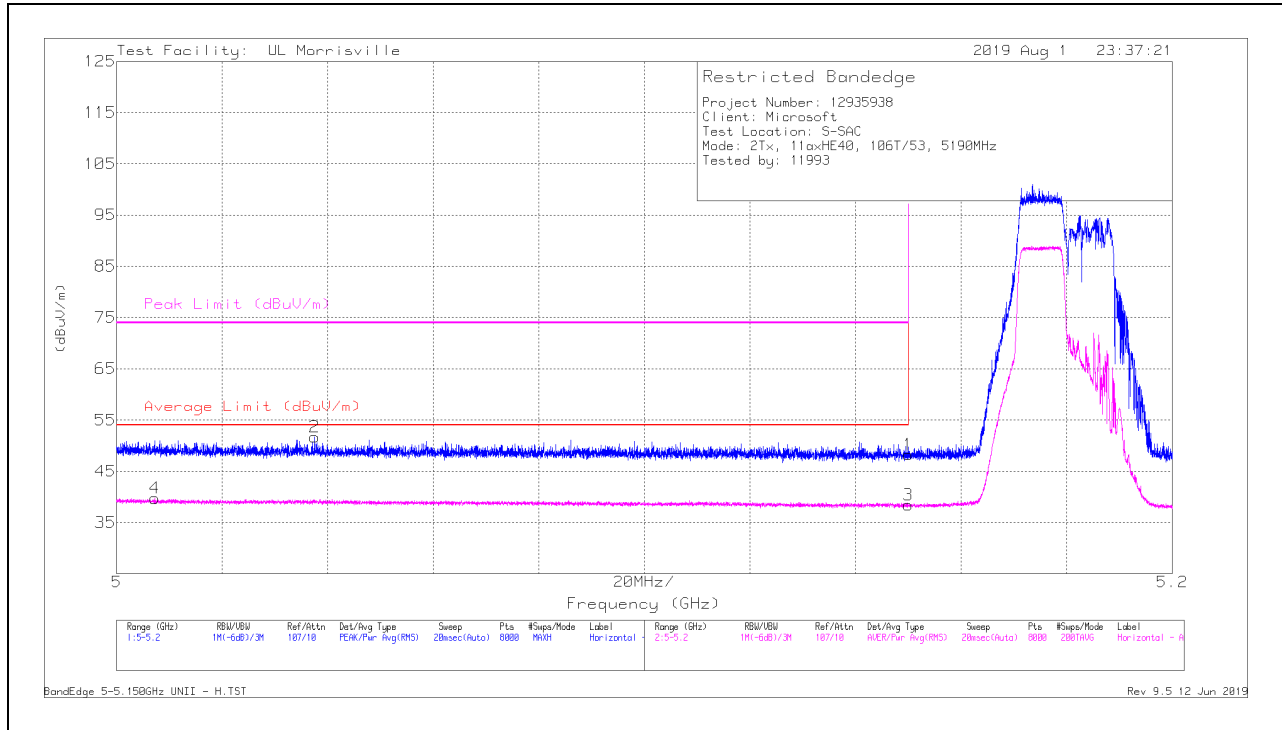

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	36.52	Pk	34.3	-22.6	48.22	-	-	74	-25.78	14	375	H
2	*** 5.03753	39.87	Pk	34.2	-22.4	51.67	-	-	74	-22.33	14	375	H
3	*** 5.14999	26.73	RMS	34.3	-22.6	38.43	54	-15.57	-	-	14	375	H
4	*** 5.0072	27.73	RMS	34.2	-22.2	39.73	54	-14.27	-	-	14	375	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

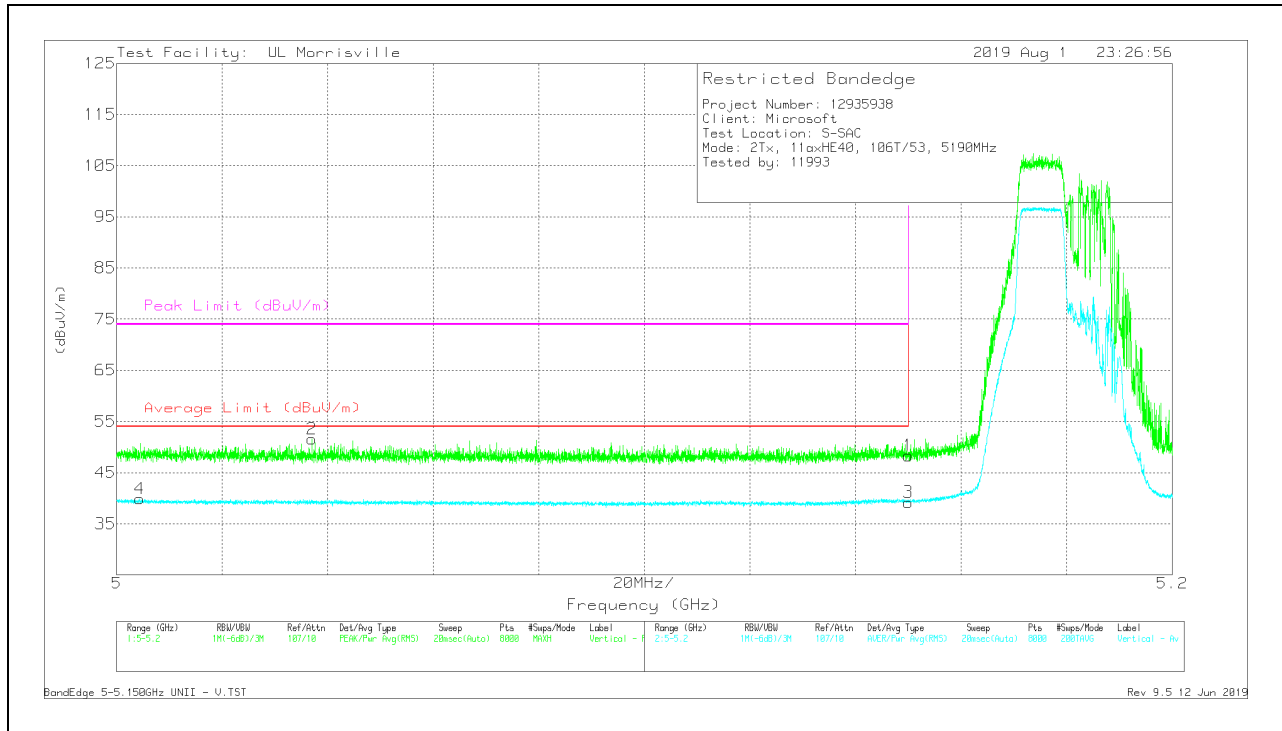


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	36.63	Pk	34.3	-22.6	48.33	-	-	74	-25.67	13	251	V
2	*** 5.03698	39.77	Pk	34.2	-22.4	51.57	-	-	74	-22.43	13	251	V
3	*** 5.14999	27.51	RMS	34.3	-22.6	39.21	54	-14.79	-	-	13	251	V
4	*** 5.0044	27.9	RMS	34.2	-22.2	39.9	54	-14.1	-	-	13	251	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

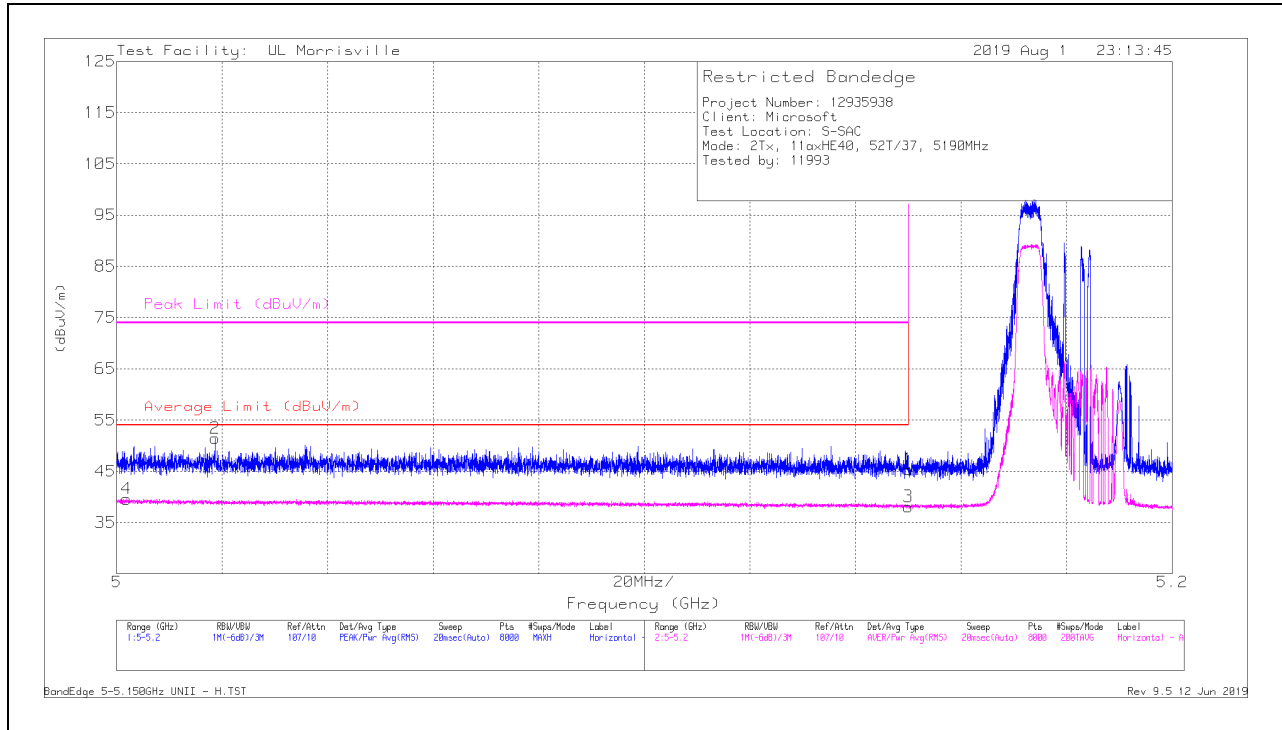

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	33.66	Pk	34.3	-22.6	45.36	-	-	74	-28.64	44	216	H
2	* ** 5.01863	39.56	Pk	34.2	-22.3	51.46	-	-	74	-22.54	44	216	H
3	* ** 5.14999	26.4	RMS	34.3	-22.6	38.1	54	-15.9	-	-	44	216	H
4	* ** 5.00188	27.6	RMS	34.2	-22.2	39.6	54	-14.4	-	-	44	216	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

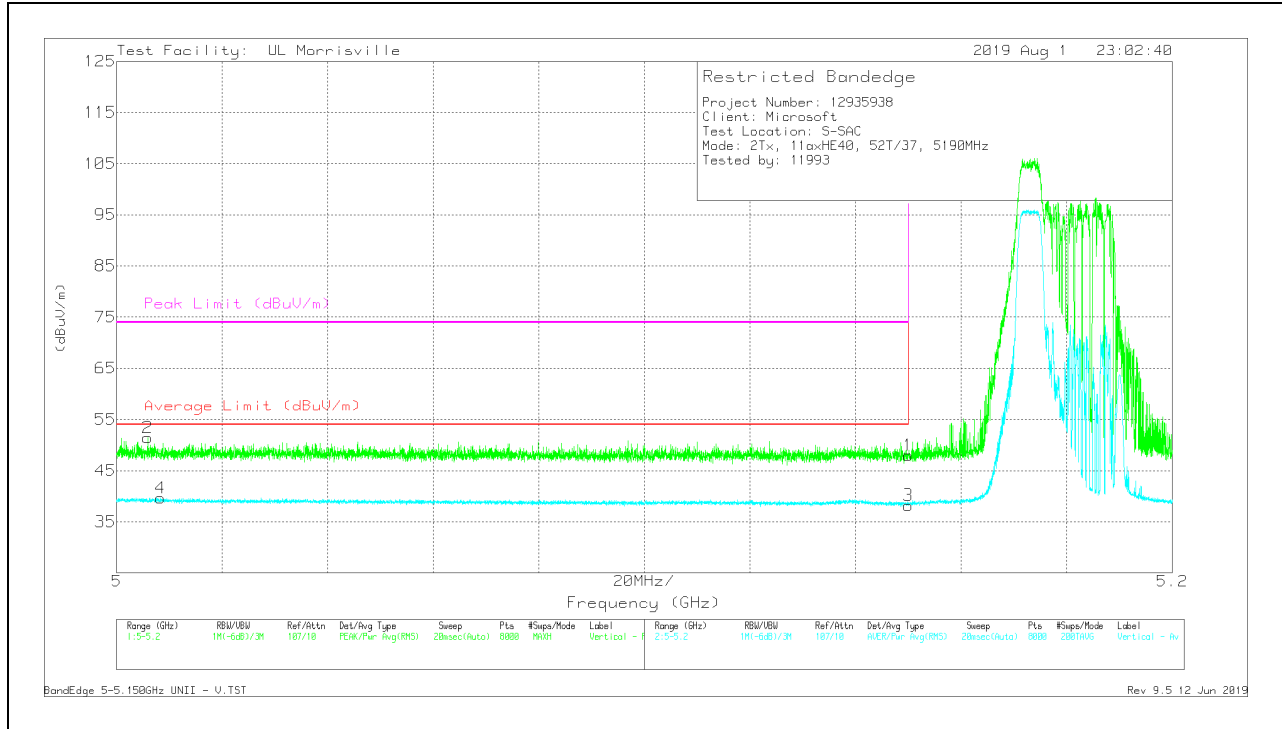

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	36.31	Pk	34.3	-22.6	48.01	-	-	74	-25.99	17	320	V
2	* ** 5.00588	39.46	Pk	34.2	-22.2	51.46	-	-	74	-22.54	17	320	V
3	* ** 5.14999	26.51	RMS	34.3	-22.6	38.21	54	-15.79	-	-	17	320	V
4	* ** 5.00833	27.68	RMS	34.2	-22.2	39.68	54	-14.32	-	-	17	320	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

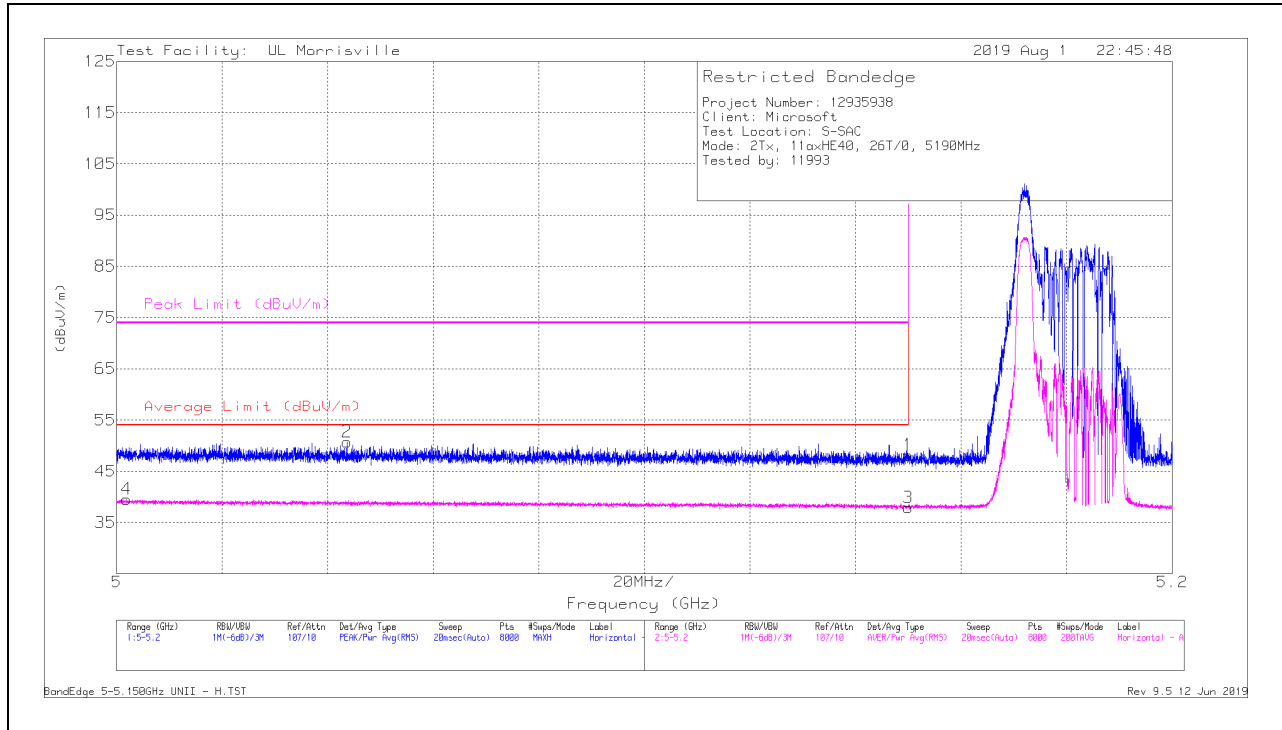

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	36.47	Pk	34.3	-22.6	48.17	-	-	74	-25.83	49	338	H
2	*** 5.04363	38.96	Pk	34.2	-22.4	50.76	-	-	74	-23.24	49	338	H
3	*** 5.14999	26.19	RMS	34.3	-22.6	37.89	54	-16.11	-	-	49	338	H
4	*** 5.00193	27.57	RMS	34.2	-22.2	39.57	54	-14.43	-	-	49	338	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

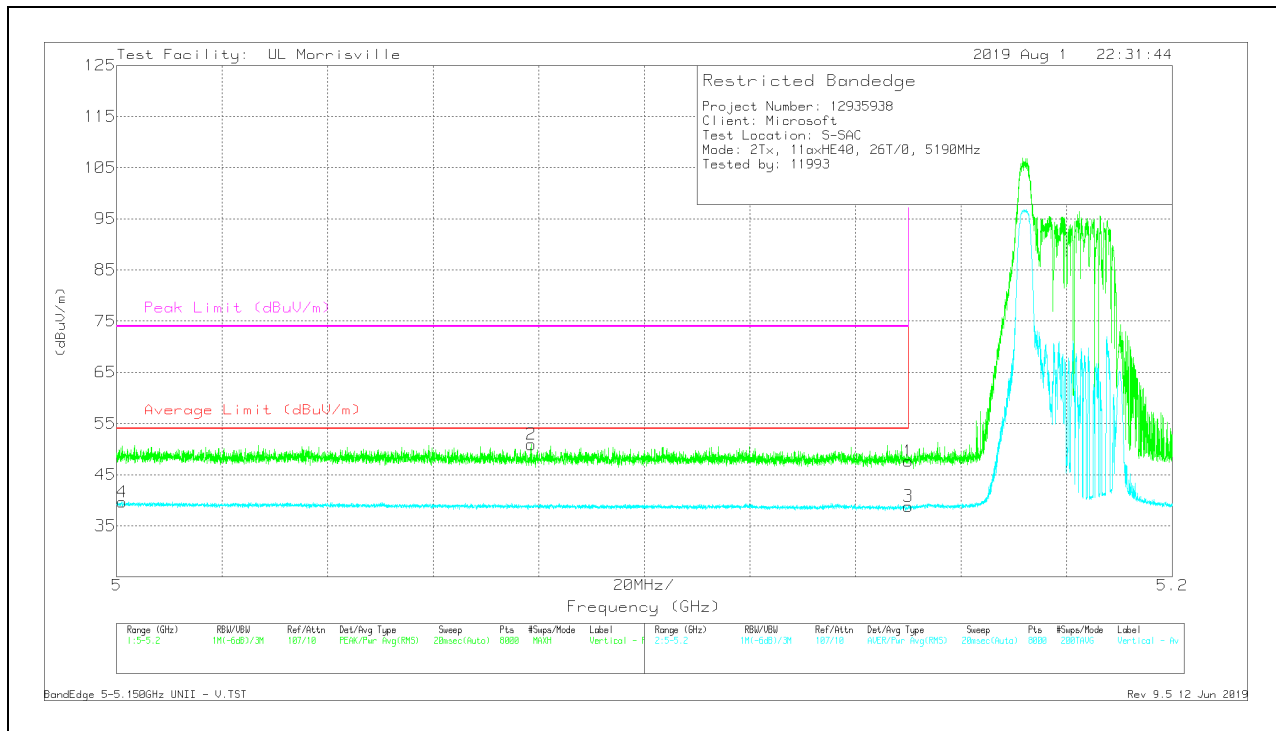

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	35.91	Pk	34.3	-22.6	47.61	-	-	74	-26.39	57	252	V
2	* ** 5.07851	39.21	Pk	34.2	-22.5	50.91	-	-	74	-23.09	57	252	V
3	* ** 5.14999	27.14	RMS	34.3	-22.6	38.84	54	-15.16	-	-	57	252	V
4	* ** 5.00108	27.67	RMS	34.2	-22.2	39.67	54	-14.33	-	-	57	252	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.1.3. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.2 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – SU MODE

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

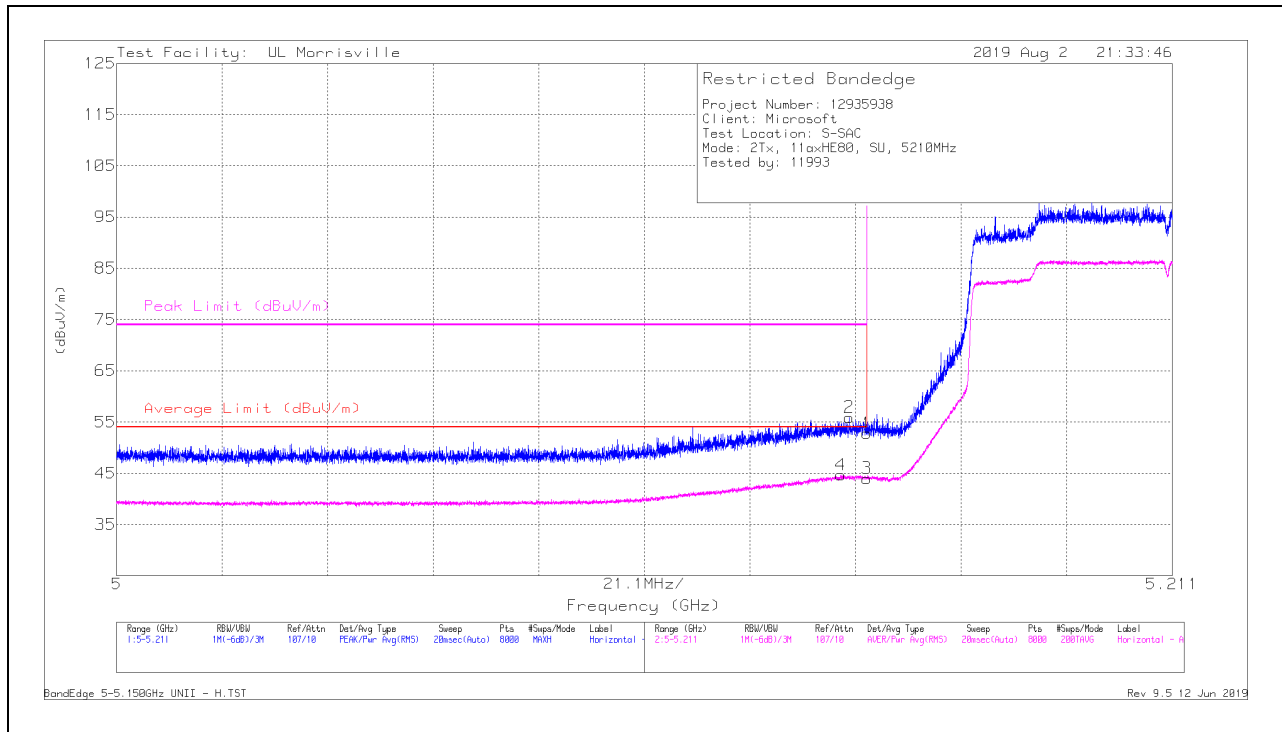

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	41.07	Pk	34.3	-22.6	52.77	-	-	74	-21.23	50	396	H
2	*** 5.14642	44.22	Pk	34.3	-22.6	55.92	-	-	74	-18.08	50	396	H
3	*** 5.14999	32.3	RMS	34.3	-22.6	44	54	-10	-	-	50	396	H
4	*** 5.14474	32.87	RMS	34.3	-22.5	44.67	54	-9.33	-	-	50	396	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

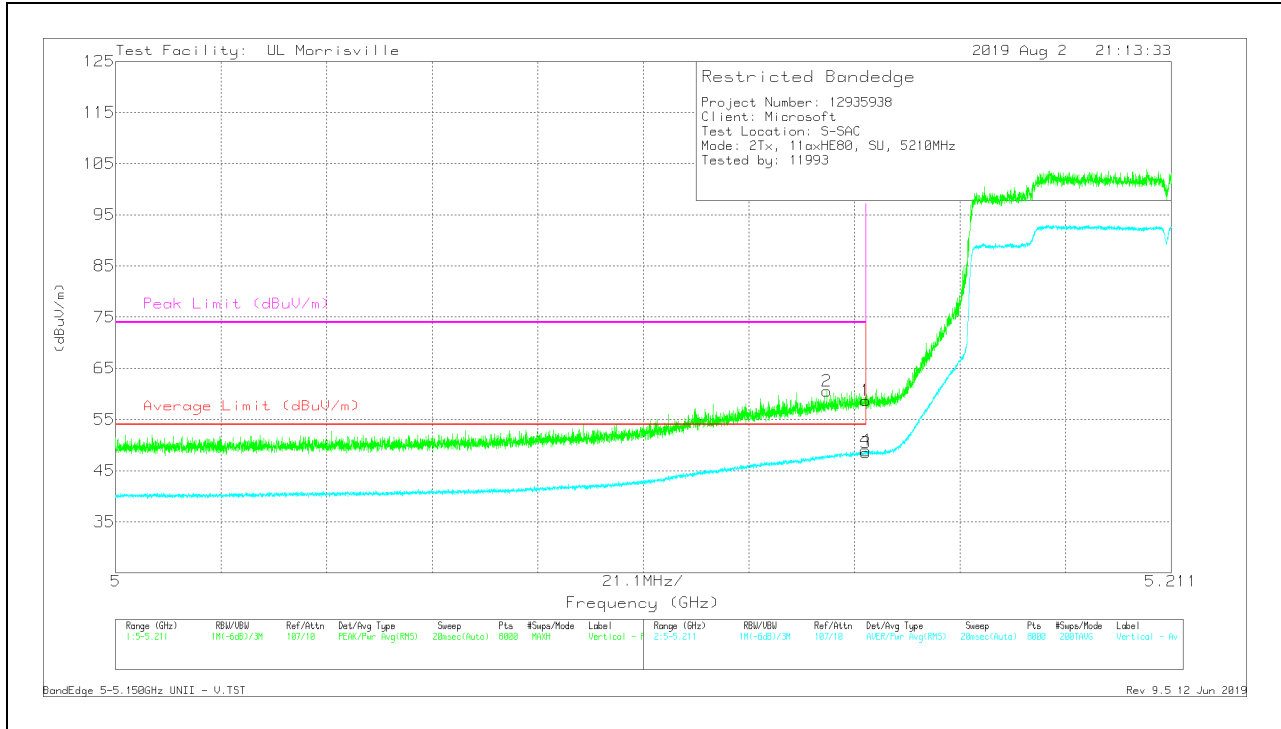


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	47.01	Pk	34.3	-22.6	58.71	-	-	74	-15.29	13	263	V
2	* ** 5.14213	48.74	Pk	34.3	-22.5	60.54	-	-	74	-13.46	13	263	V
3	* ** 5.14999	36.77	RMS	34.3	-22.6	48.47	54	-5.53	-	-	13	263	V
4	* ** 5.14988	37.24	RMS	34.3	-22.6	48.94	54	-5.06	-	-	13	263	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index 67**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

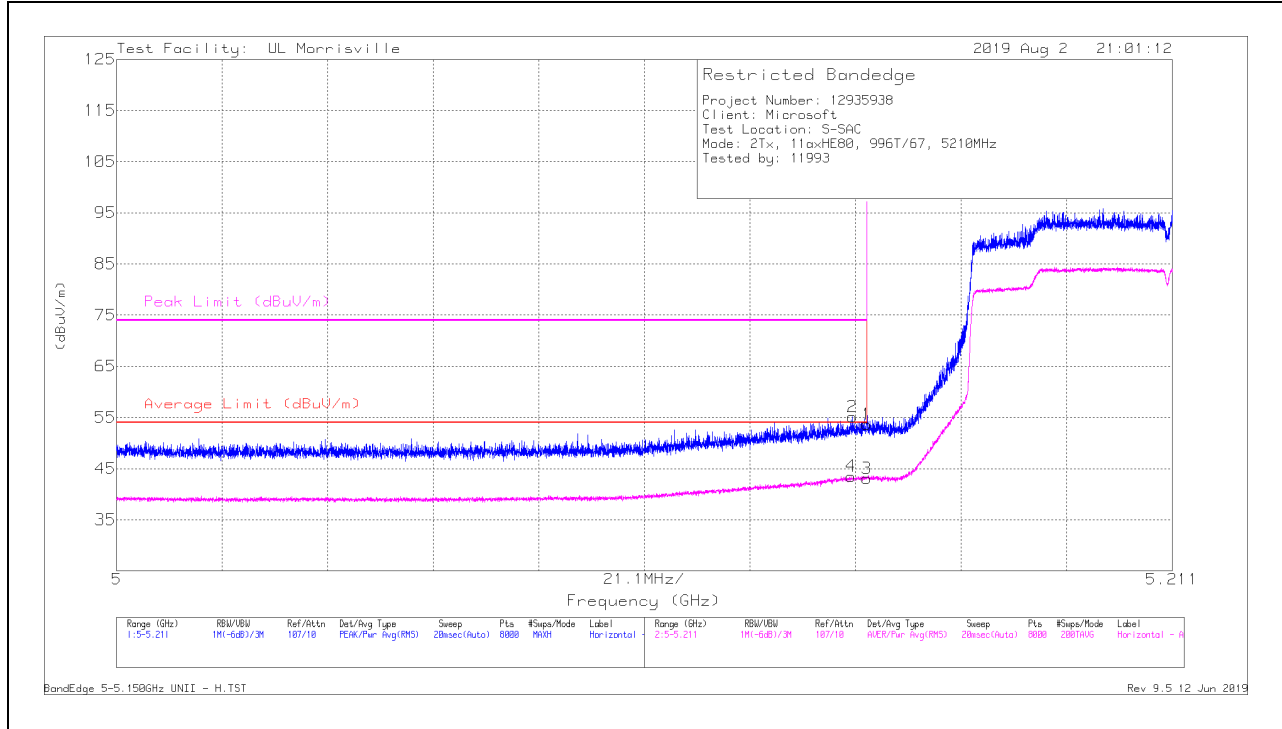

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	41.92	Pk	34.3	-22.6	53.62	-	-	74	-20.38	58	294	H
2	* ** 5.14701	43.41	Pk	34.3	-22.6	55.11	-	-	74	-18.89	58	294	H
3	* ** 5.14999	31.38	RMS	34.3	-22.6	43.08	54	-10.92	-	-	58	294	H
4	* ** 5.14679	31.81	RMS	34.3	-22.6	43.51	54	-10.49	-	-	58	294	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

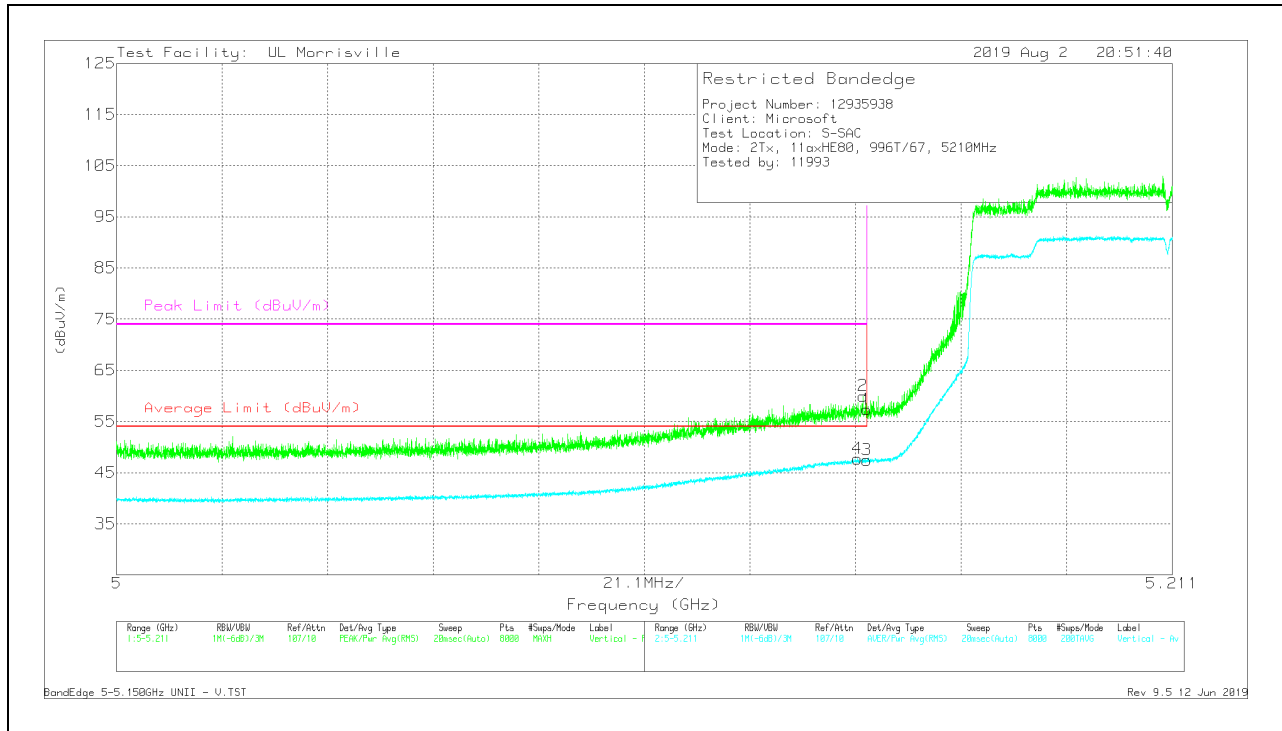


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	45.62	Pk	34.3	-22.6	57.32	-	-	74	-16.68	62	228	V
2	* ** 5.14914	48.29	Pk	34.3	-22.6	59.99	-	-	74	-14.01	62	228	V
3	* ** 5.14999	35.76	RMS	34.3	-22.6	47.46	54	-6.54	-	-	62	228	V
4	* ** 5.14809	36.02	RMS	34.3	-22.6	47.72	54	-6.28	-	-	62	228	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

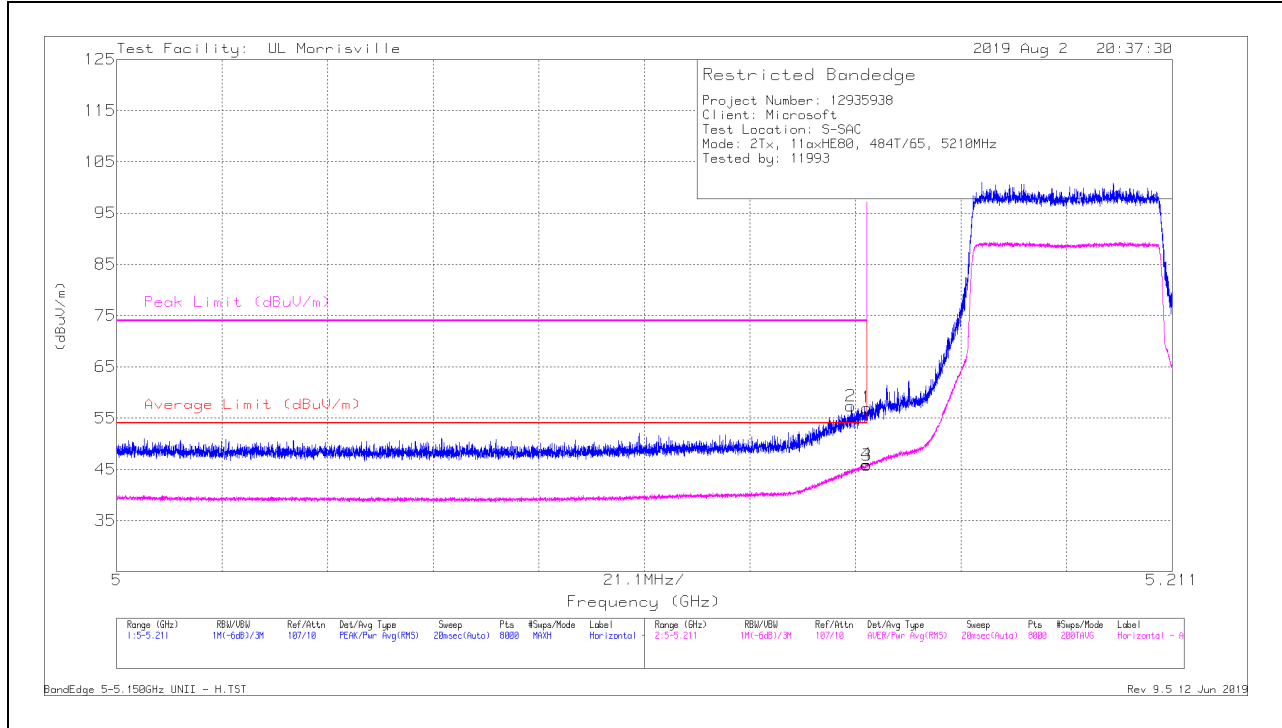

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	45.34	Pk	34.3	-22.6	57.04	-	-	74	-16.96	17	345	H
2	* ** 5.14674	45.67	PK	34.3	-22.6	57.37	-	-	74	-16.63	17	345	H
3	* ** 5.14999	34.1	RMS	34.3	-22.6	45.8	54	-8.2	-	-	17	345	H
4	* ** 5.14988	34.26	RMS	34.3	-22.6	45.96	54	-8.04	-	-	17	345	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

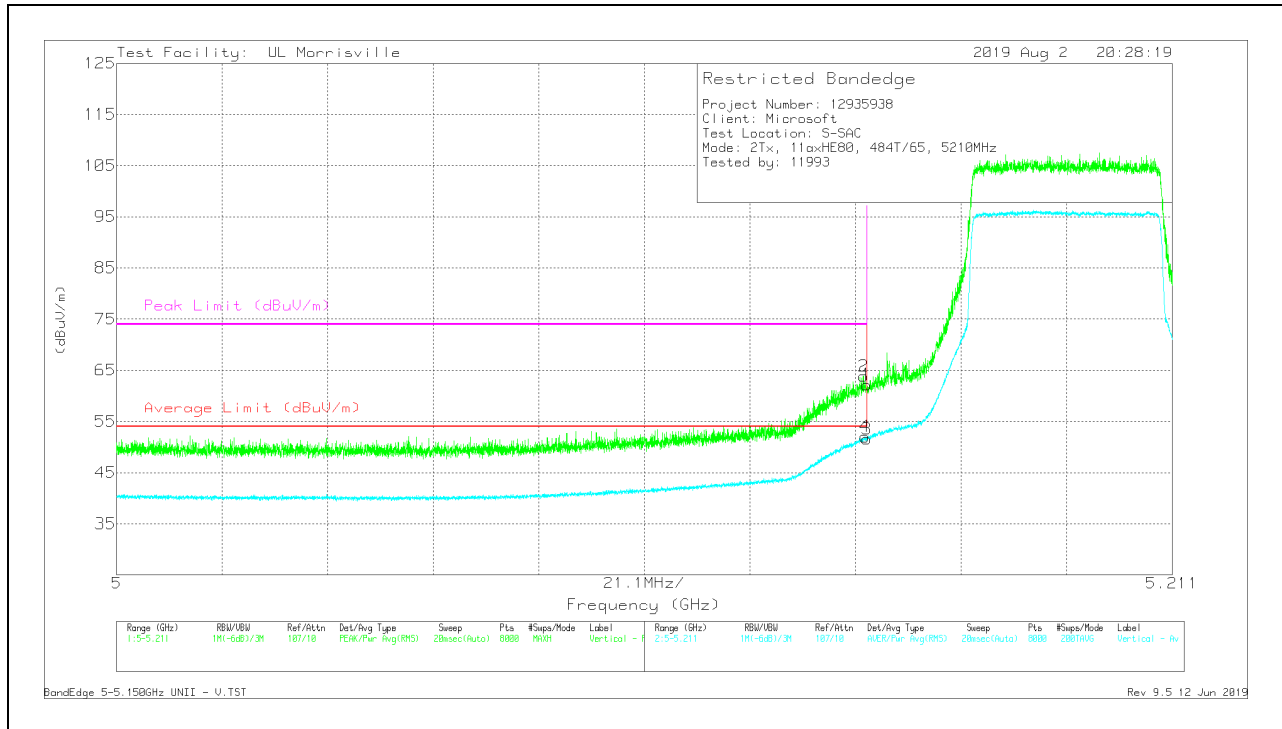

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	50.48	Pk	34.3	-22.6	62.18	-	-	74	-11.82	17	270	V
2	* ** 5.14933	52.18	Pk	34.3	-22.6	63.88	-	-	74	-10.12	17	270	V
3	* ** 5.14999	39.9	RMS	34.3	-22.6	51.6	54	-2.4	-	-	17	270	V
4	* ** 5.14962	40.32	RMS	34.3	-22.6	52.02	54	-1.98	-	-	17	270	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

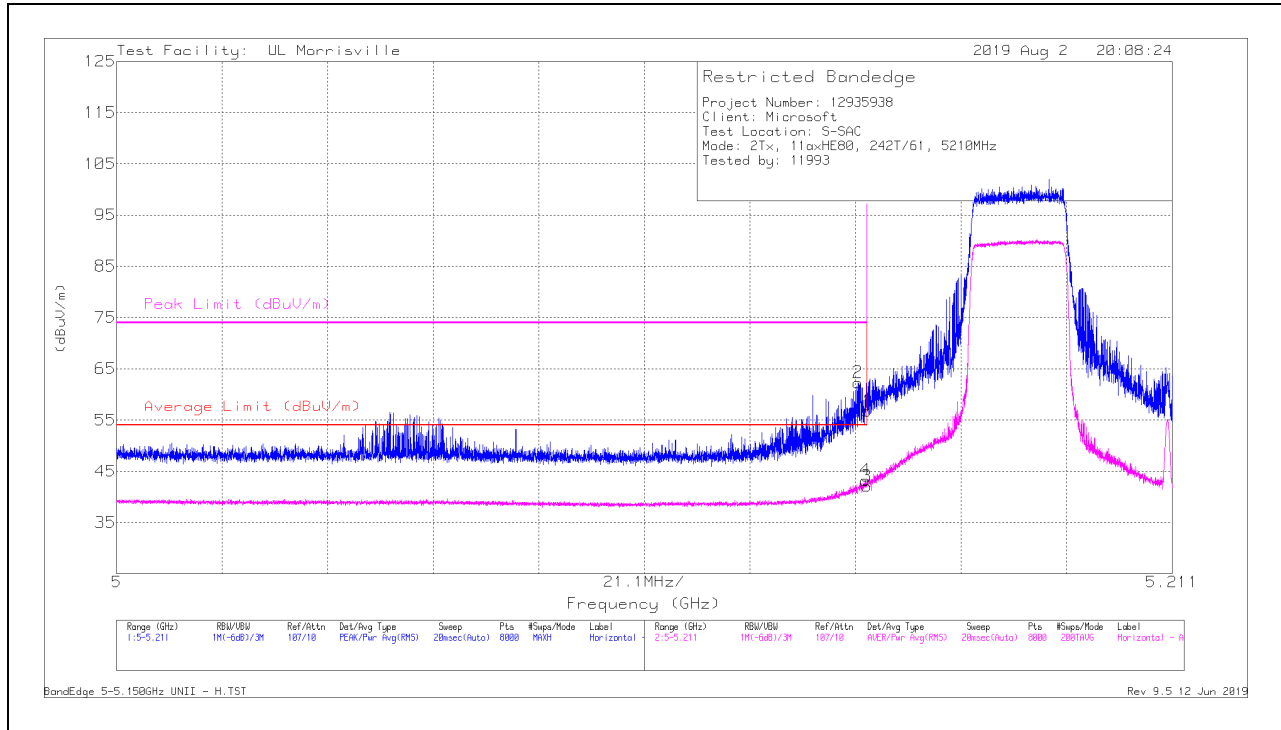

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	45.05	Pk	34.3	-22.6	56.75	-	-	74	-17.25	50	260	H
2	*** 5.14822	50.62	Pk	34.3	-22.6	62.32	-	-	74	-11.68	50	260	H
3	*** 5.14999	30.38	RMS	34.3	-22.6	42.08	54	-11.92	-	-	50	260	H
4	*** 5.1497	31.58	RMS	34.3	-22.6	43.28	54	-10.72	-	-	50	260	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

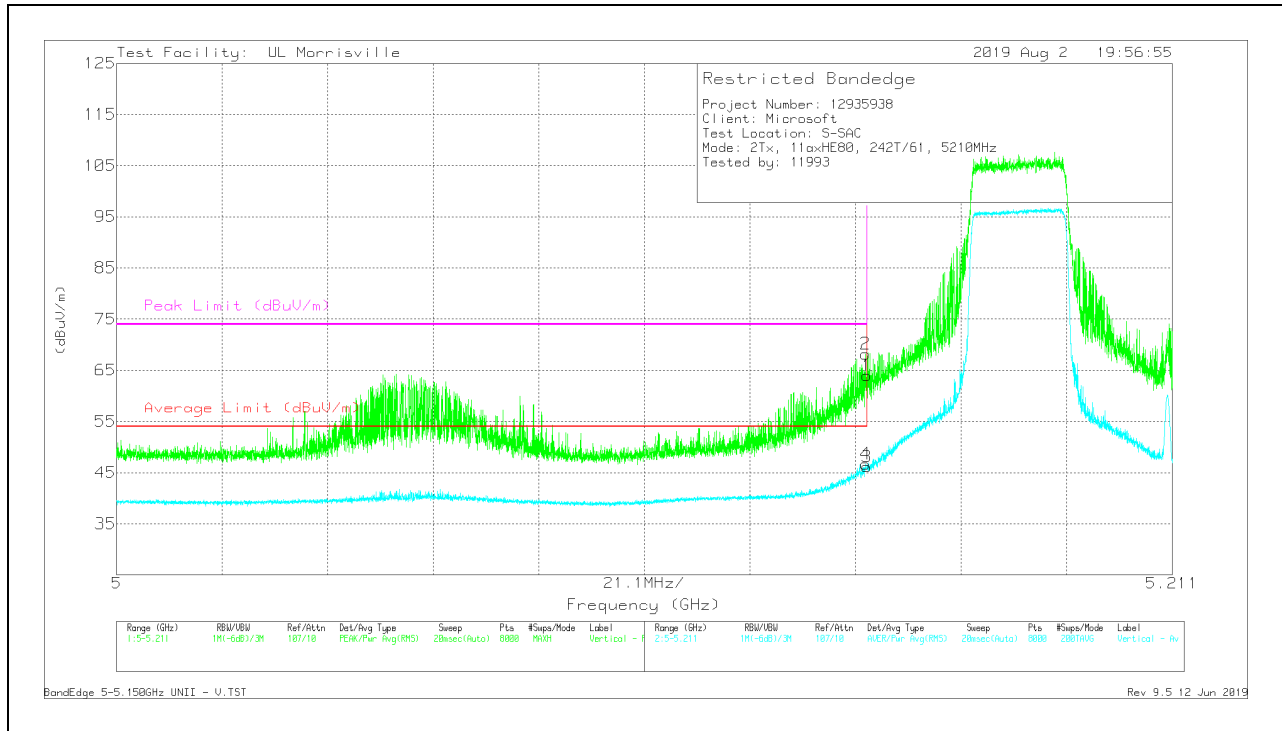


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	52.26	Pk	34.3	-22.6	63.96	-	-	74	-10.04	60	222	V
2	* ** 5.14964	56.52	Pk	34.3	-22.6	68.22	-	-	74	-5.78	60	222	V
3	* ** 5.14999	34.43	RMS	34.3	-22.6	46.13	54	-7.87	-	-	60	222	V
4	* ** 5.14972	35	RMS	34.3	-22.6	46.7	54	-7.3	-	-	60	222	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

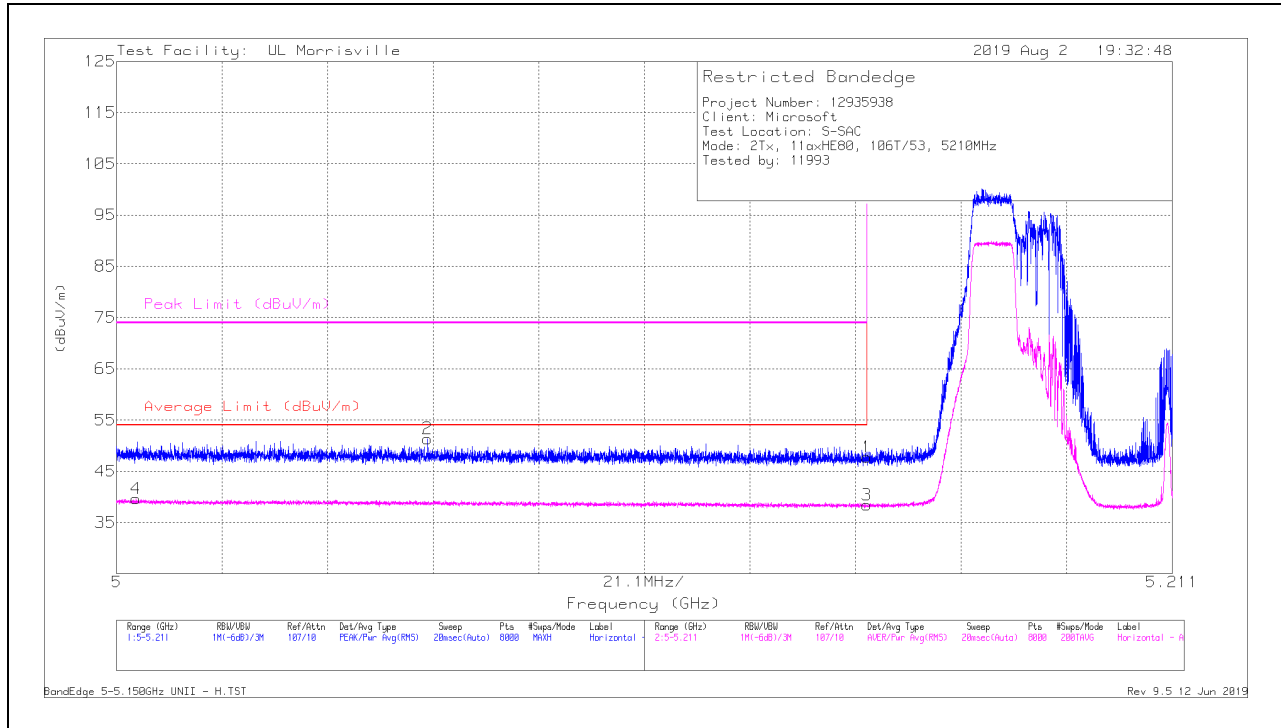

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	36.08	Pk	34.3	-22.6	47.78	-	-	74	-26.22	65	357	H
2	*** 5.06215	39.68	Pk	34.2	-22.5	51.38	-	-	74	-22.62	65	357	H
3	*** 5.14999	26.73	RMS	34.3	-22.6	38.43	54	-15.57	-	-	65	357	H
4	*** 5.00385	27.63	RMS	34.2	-22.2	39.63	54	-14.37	-	-	65	357	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

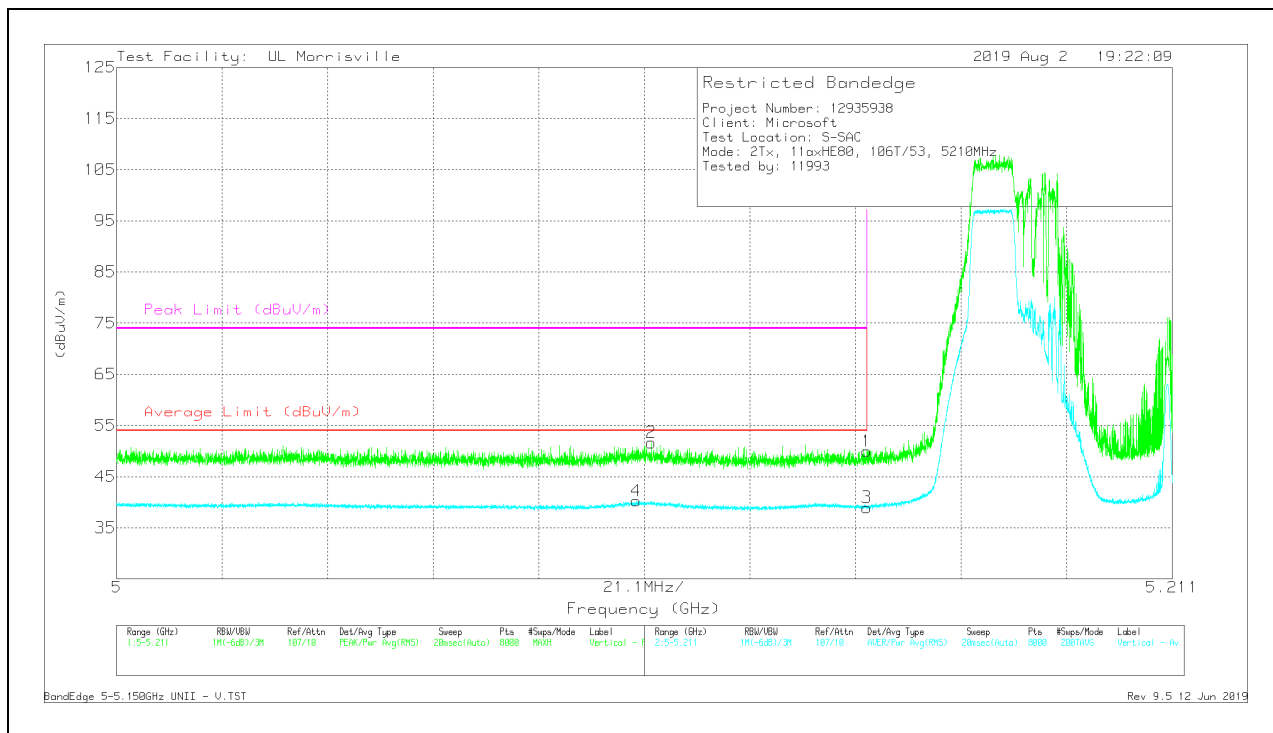


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	38.26	Pk	34.3	-22.6	49.96	-	-	74	-24.04	52	261	V
2	*** 5.10686	40.04	Pk	34.2	-22.6	51.64	-	-	74	-22.36	52	261	V
3	*** 5.14999	27.26	RMS	34.3	-22.6	38.96	54	-15.04	-	-	52	261	V
4	*** 5.1038	28.63	RMS	34.2	-22.6	40.23	54	-13.77	-	-	52	261	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

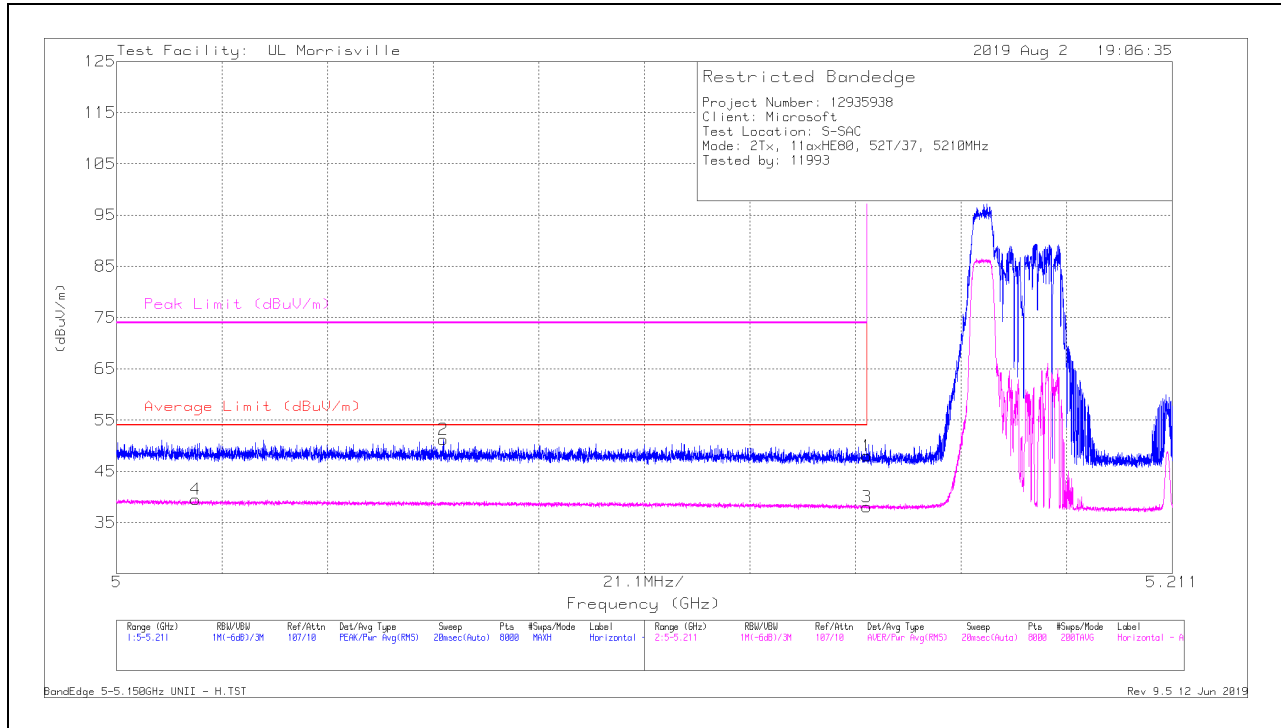

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	36.32	Pk	34.3	-22.6	48.02	-	-	74	-25.98	341	255	H
2	*** 5.06534	39.48	Pk	34.2	-22.5	51.18	-	-	74	-22.82	341	255	H
3	*** 5.14999	26.35	RMS	34.3	-22.6	38.05	54	-15.95	-	-	341	255	H
4	*** 5.01585	27.63	RMS	34.2	-22.3	39.53	54	-14.47	-	-	341	255	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

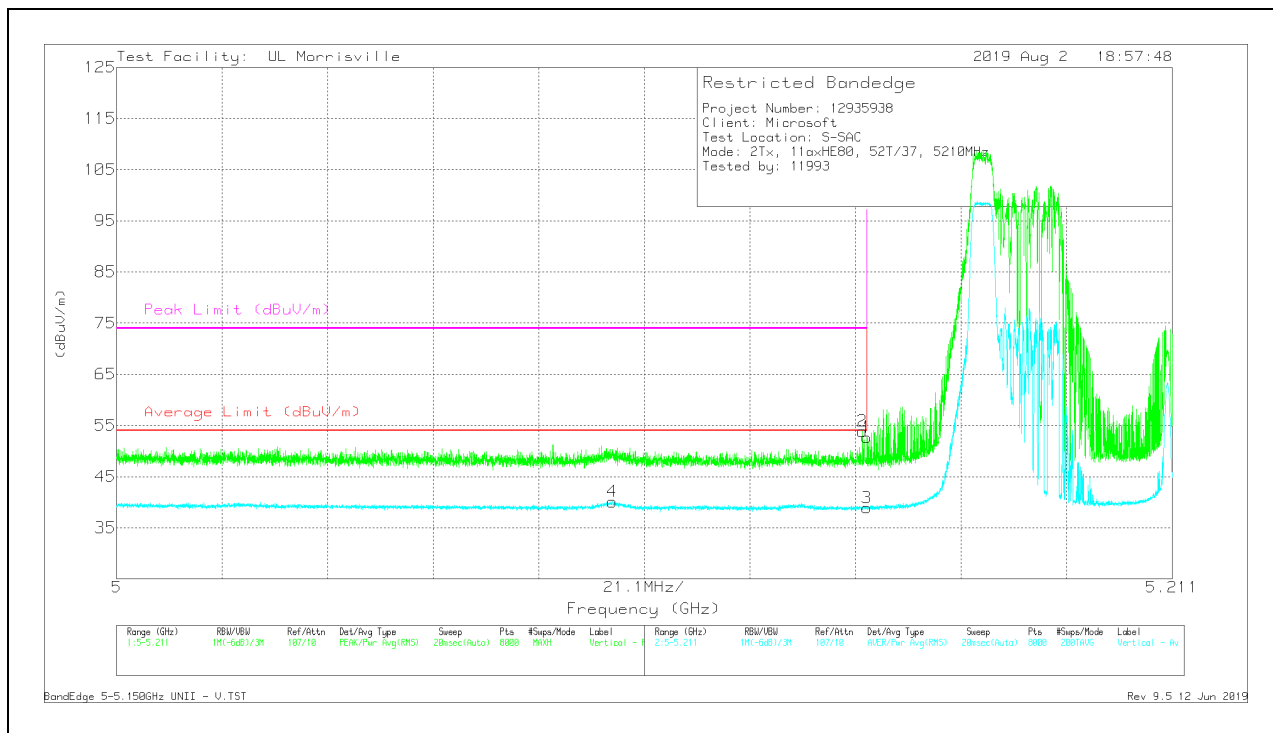


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	41.01	Pk	34.3	-22.6	52.71	-	-	74	-21.29	56	264	V
2	* ** 5.14906	42.16	Pk	34.3	-22.6	53.86	-	-	74	-20.14	56	264	V
3	* ** 5.14999	27.2	RMS	34.3	-22.6	38.9	54	-15.1	-	-	56	264	V
4	* ** 5.09905	28.49	RMS	34.2	-22.6	40.09	54	-13.91	-	-	56	264	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

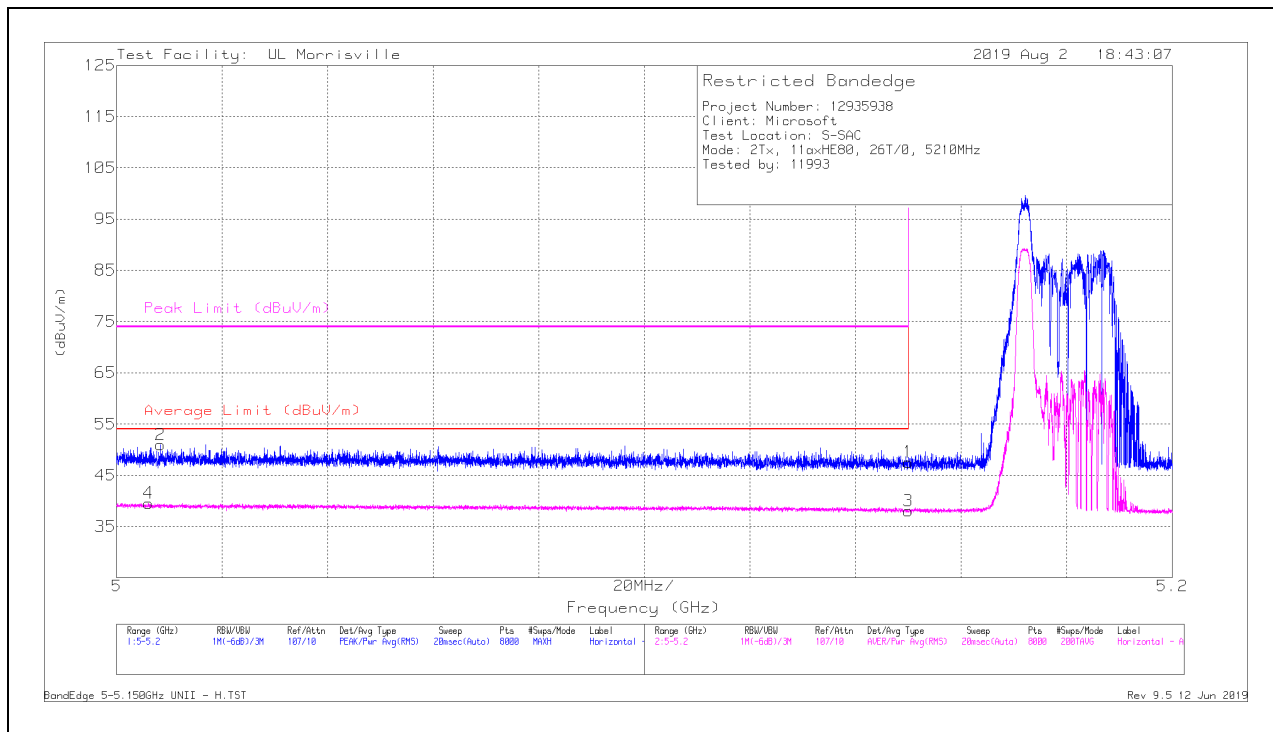

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	35.86	Pk	34.3	-22.6	47.56	-	-	74	-26.44	56	391	H
2	*** 5.00833	38.96	Pk	34.2	-22.2	50.96	-	-	74	-23.04	56	391	H
3	*** 5.14999	26.37	RMS	34.3	-22.6	38.07	54	-15.93	-	-	56	391	H
4	*** 5.006	27.56	RMS	34.2	-22.2	39.56	54	-14.44	-	-	56	391	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

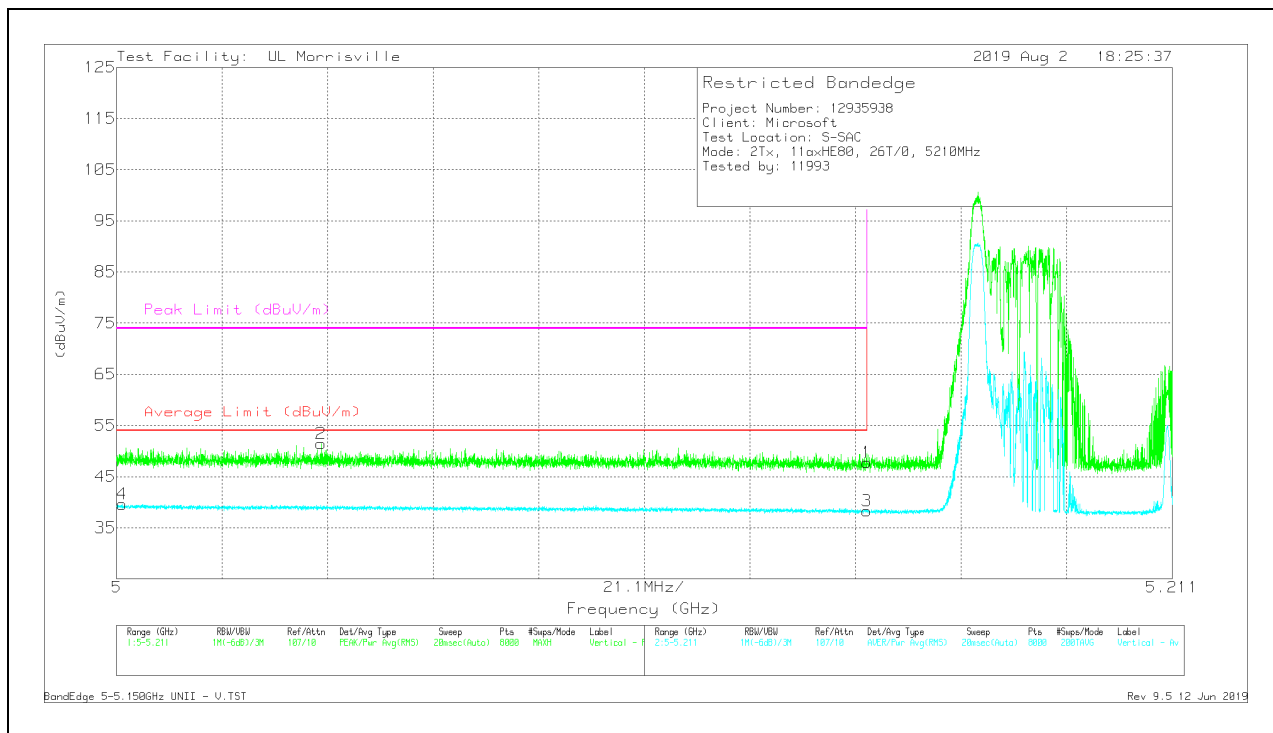

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	36.09	Pk	34.3	-22.6	47.79	-	-	74	-26.21	342	276	V
2	* ** 5.04086	39.61	Pk	34.2	-22.4	51.41	-	-	74	-22.59	342	276	V
3	* ** 5.14999	26.61	RMS	34.3	-22.6	38.31	54	-15.69	-	-	342	276	V
4	* ** 5.00106	27.6	RMS	34.2	-22.2	39.6	54	-14.4	-	-	342	276	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection




### 10.1.4. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.3 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – SU MODE

#### BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL RESULT

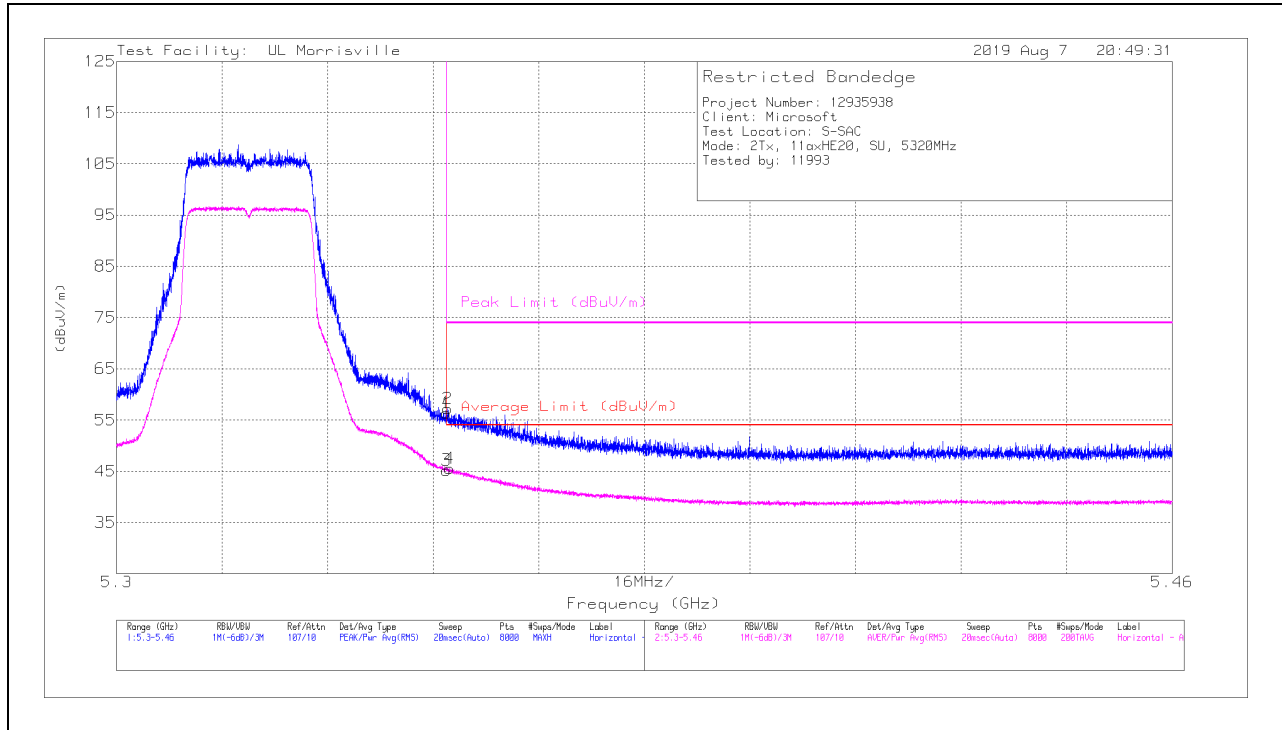

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	45.2	Pk	34.4	-23.2	56.4	-	-	74	-17.6	25	349	H
2	*** 5.35021	46.03	Pk	34.4	-23.2	57.23	-	-	74	-16.77	25	349	H
3	*** 5.35001	34.03	RMS	34.4	-23.2	45.23	54	-8.77	-	-	25	349	H
4	*** 5.35043	34.37	RMS	34.4	-23.2	45.57	54	-8.43	-	-	25	349	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

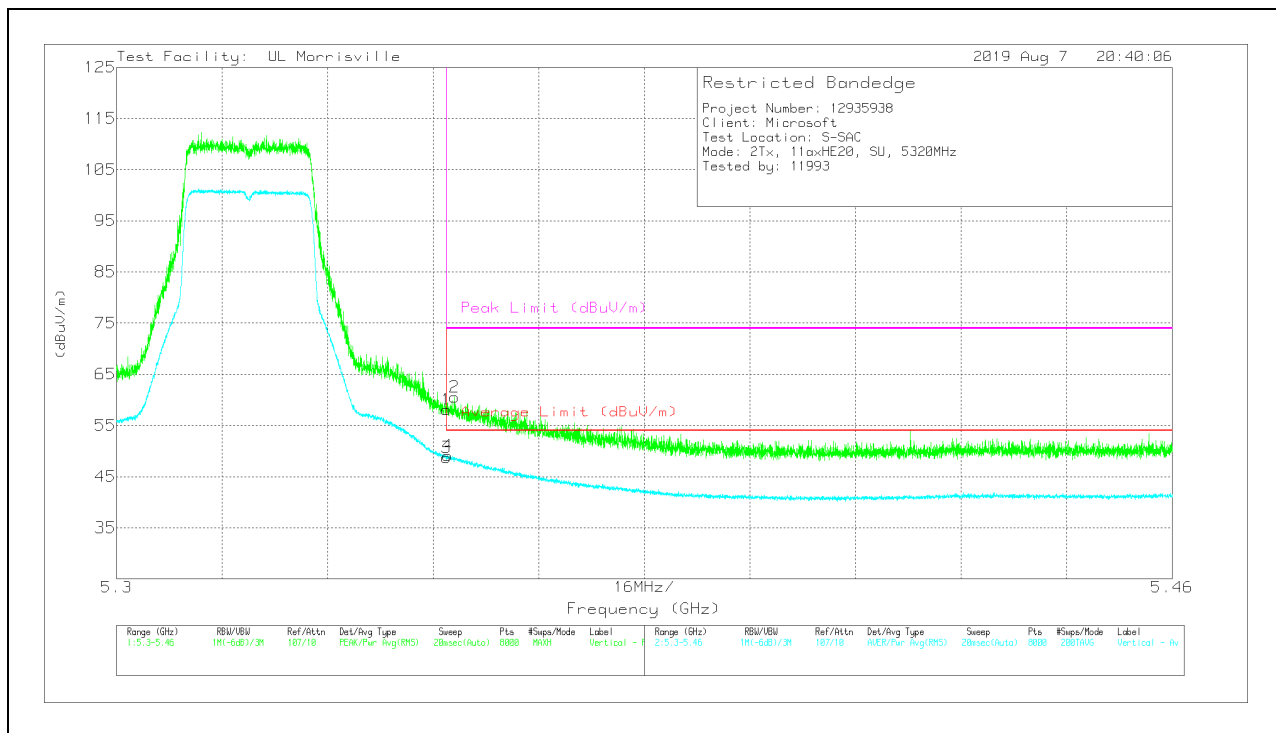


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	46.89	Pk	34.4	-23.2	58.09	-	-	74	-15.91	42	271	V
2	* ** 5.35125	49.37	Pk	34.4	-23.2	60.57	-	-	74	-13.43	42	271	V
3	* ** 5.35001	37.54	RMS	34.4	-23.2	48.74	54	-5.26	-	-	42	271	V
4	* ** 5.35015	37.9	RMS	34.4	-23.2	49.1	54	-4.9	-	-	42	271	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

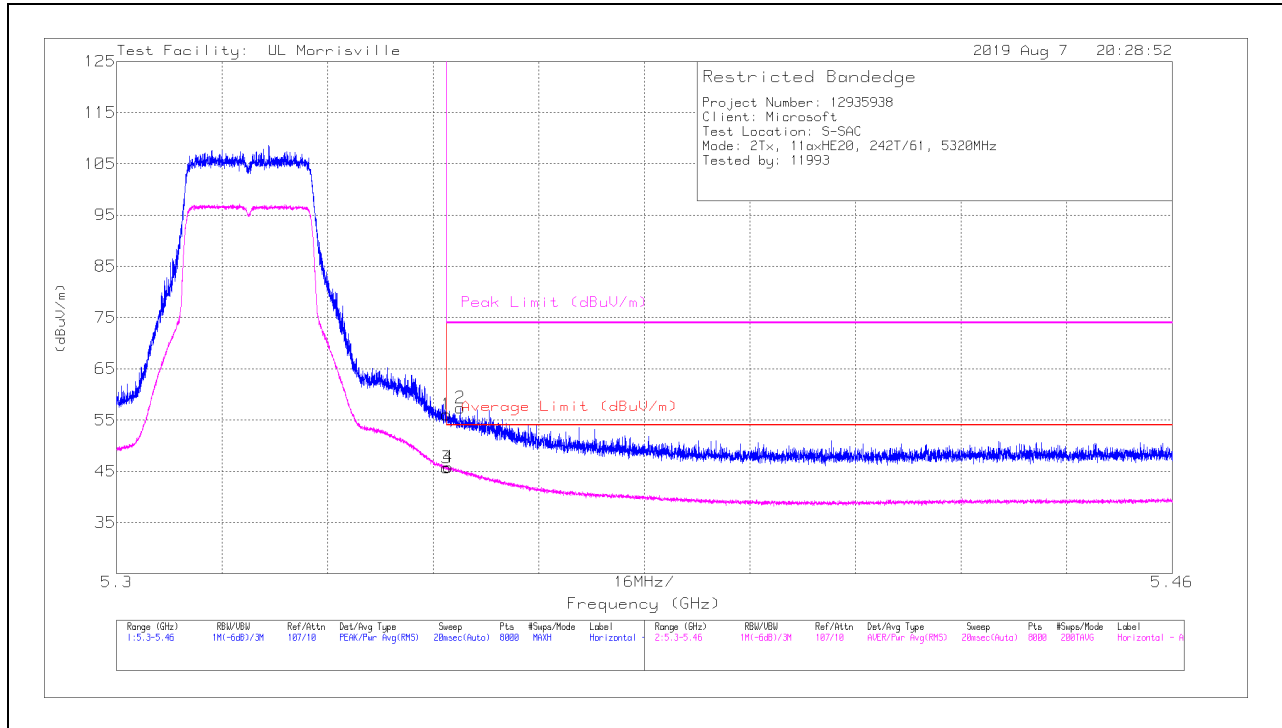

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	44.87	Pk	34.4	-23.2	56.07	-	-	74	-17.93	23	371	H
2	*** 5.35207	46.18	PK	34.4	-23.2	57.38	-	-	74	-16.62	23	371	H
3	*** 5.35001	34.52	RMS	34.4	-23.2	45.72	54	-8.28	-	-	23	371	H
4	*** 5.35029	34.63	RMS	34.4	-23.2	45.83	54	-8.17	-	-	23	371	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

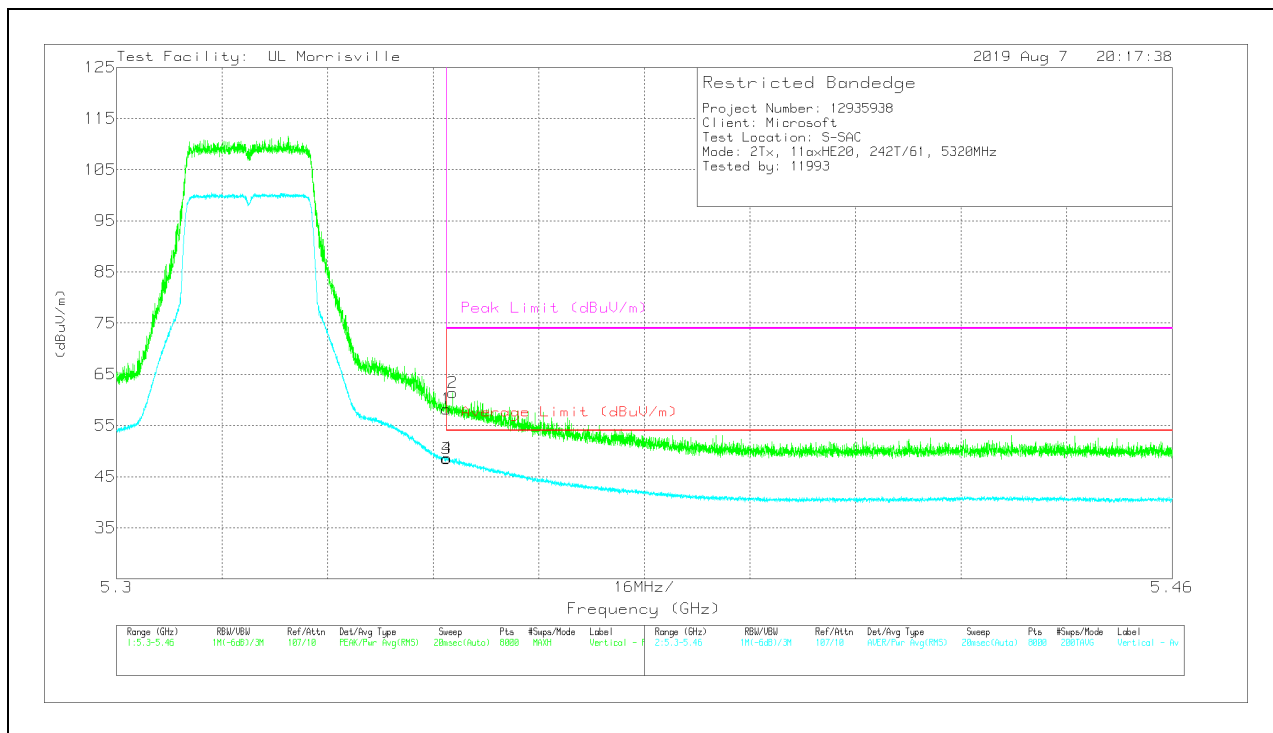


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	47.02	Pk	34.4	-23.2	58.22	-	-	74	-15.78	5	277	V
2	*** 5.35093	50.22	Pk	34.4	-23.2	61.42	-	-	74	-12.58	5	277	V
3	*** 5.35001	37.29	RMS	34.4	-23.2	48.49	54	-5.51	-	-	5	277	V
4	*** 5.35009	37.43	RMS	34.4	-23.2	48.63	54	-5.37	-	-	5	277	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 54**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

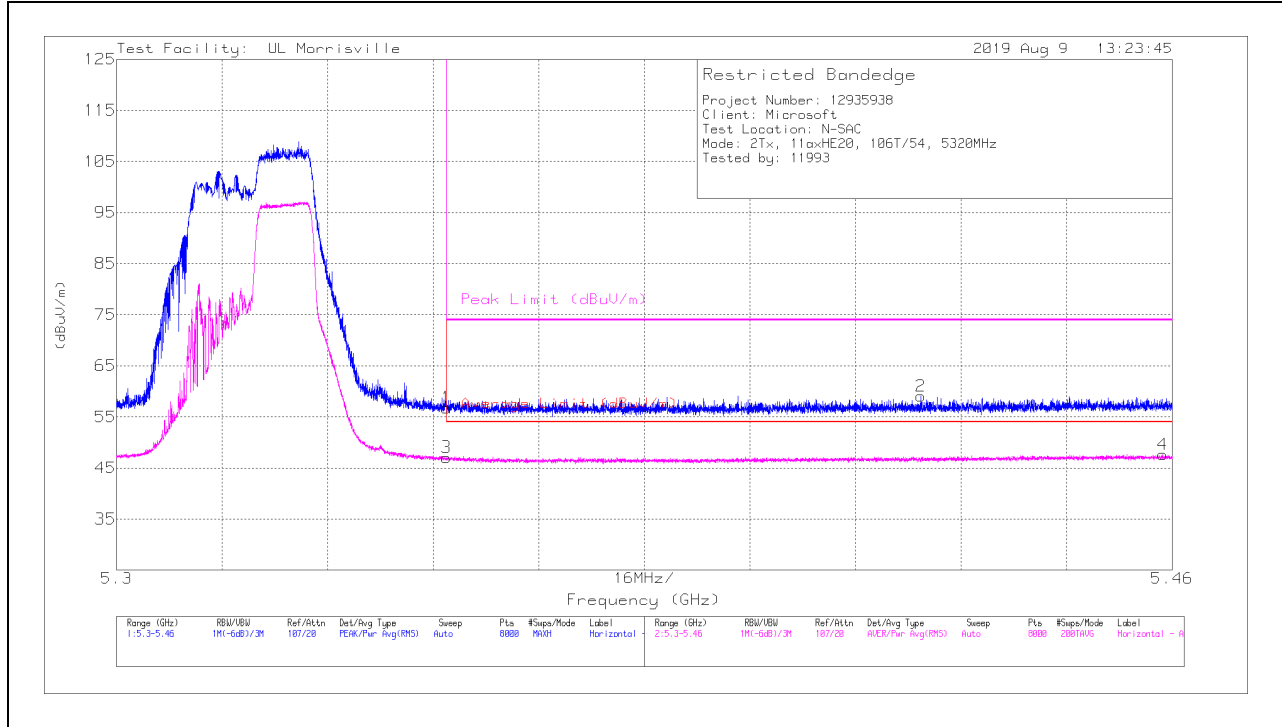

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.38	Pk	34.4	-23	56.78	-	-	74	-17.22	208	176	H
2	* ** 5.4219	47.65	Pk	34.4	-23	59.05	-	-	74	-14.95	208	176	H
3	* ** 5.35001	35.66	RMS	34.4	-23	47.06	54	-6.94	-	-	208	176	H
4	* ** 5.45854	36.21	RMS	34.4	-23	47.61	54	-6.39	-	-	208	176	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

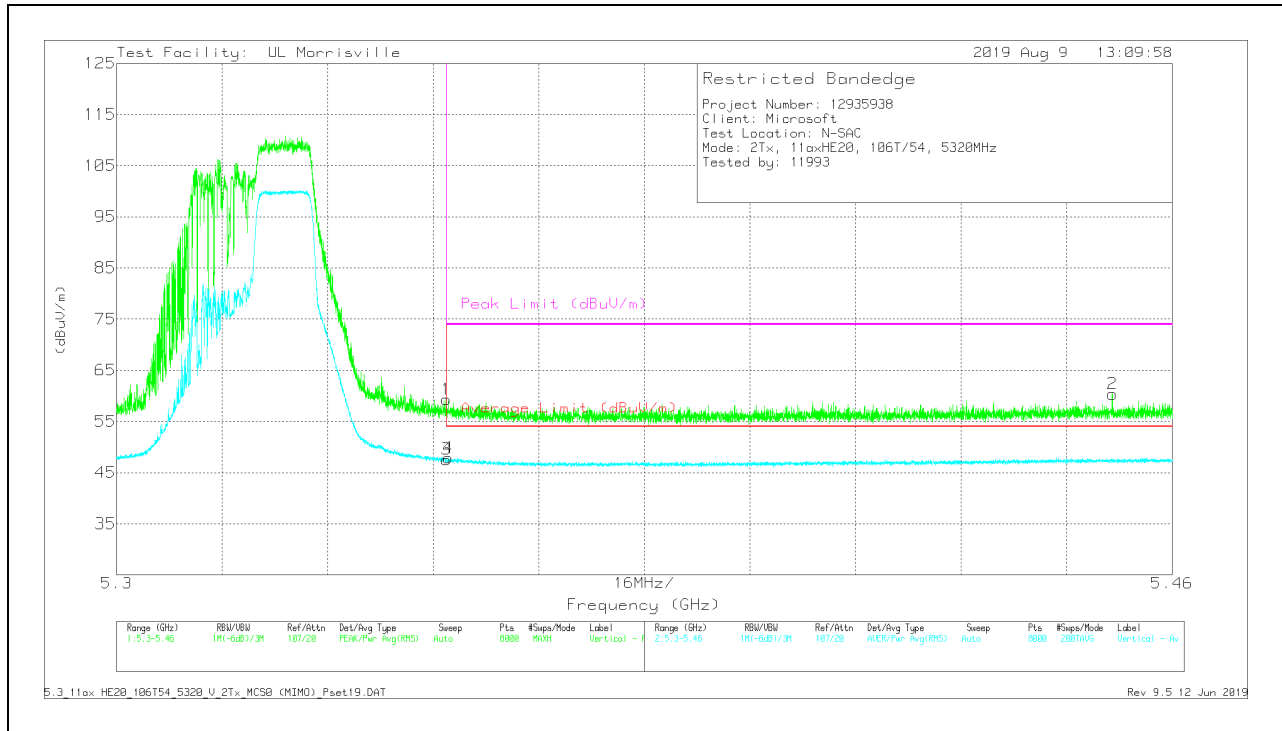


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	47.91	Pk	34.4	-23	59.31	-	-	74	-14.69	14	291	V
2	*** 5.4509	48.87	Pk	34.4	-22.9	60.37	-	-	74	-13.63	14	291	V
3	*** 5.35001	36.18	RMS	34.4	-23	47.58	54	-6.42	-	-	14	291	V
4	*** 5.35025	36.51	RMS	34.4	-23	47.91	54	-6.09	-	-	14	291	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 40**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

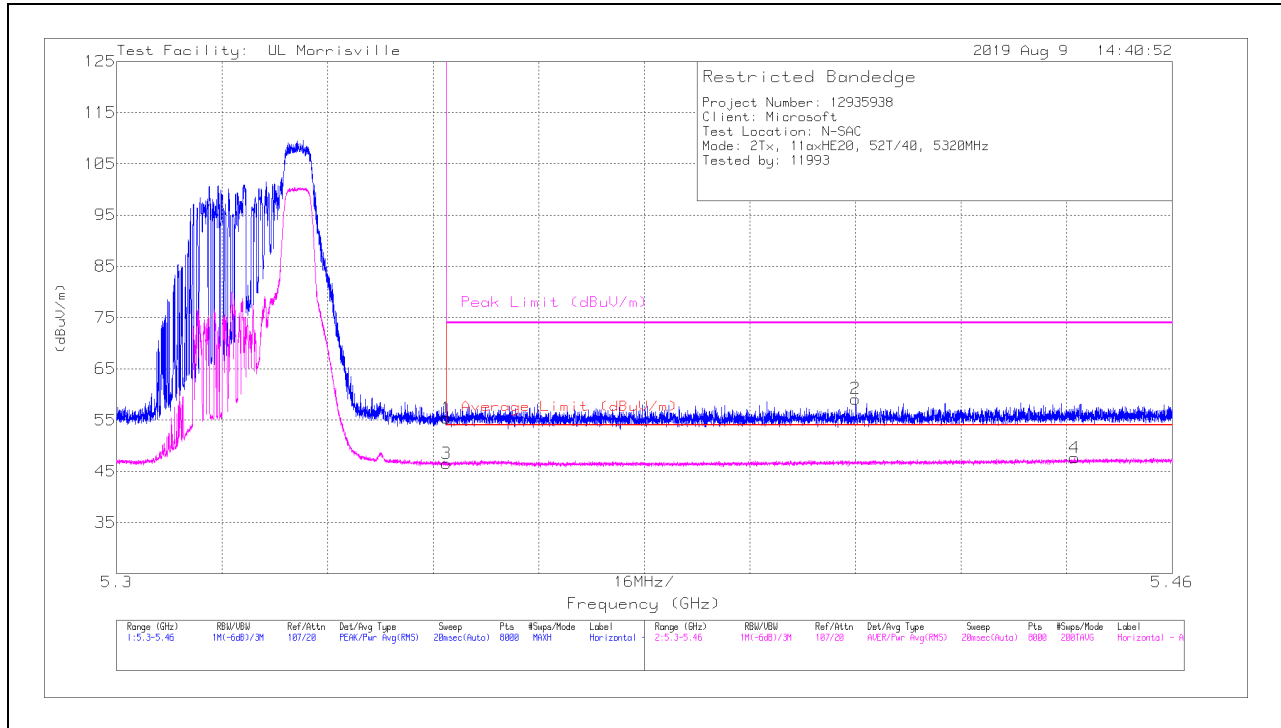

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	43.98	Pk	34.4	-23	55.38	-	-	74	-18.62	258	196	H
2	*** 5.41202	47.63	Pk	34.4	-22.9	59.13	-	-	74	-14.87	258	196	H
3	*** 5.35001	35.15	RMS	34.4	-23	46.55	54	-7.45	-	-	258	196	H
4	*** 5.44518	36.1	RMS	34.4	-22.9	47.6	54	-6.4	-	-	258	196	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

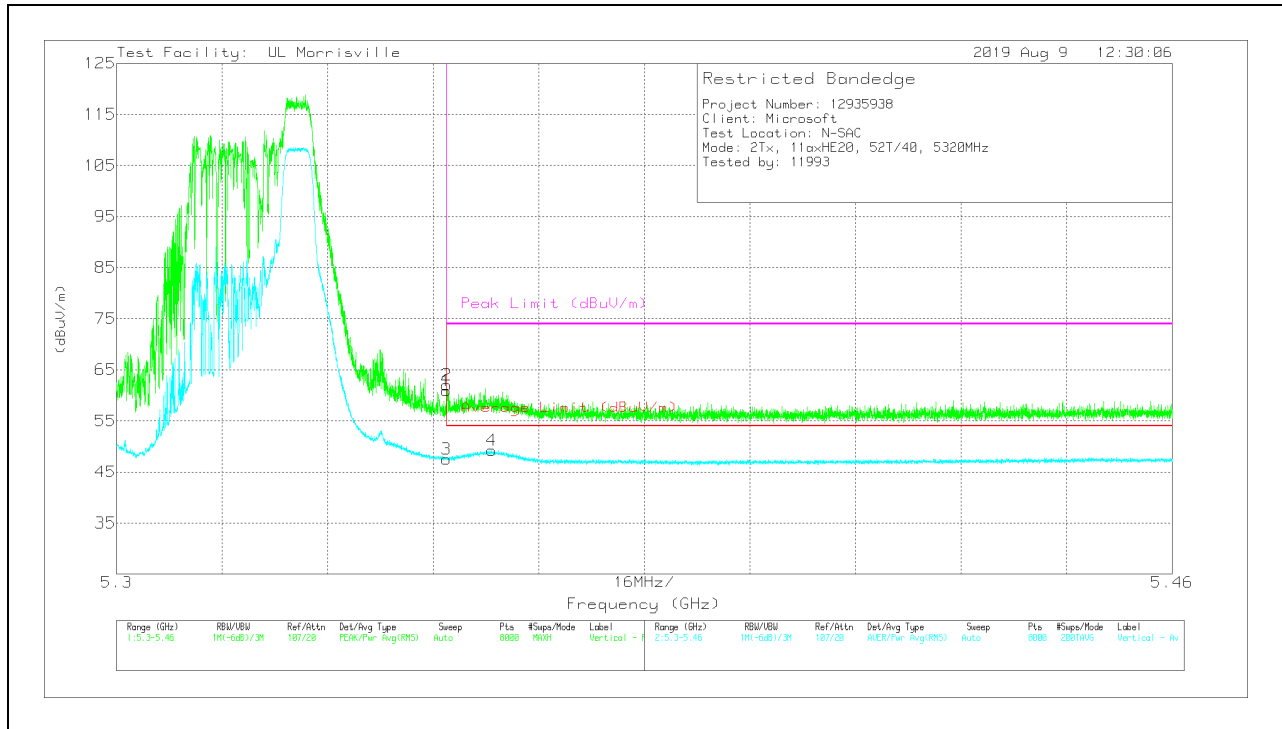

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	49.48	Pk	34.4	-23	60.88	-	-	74	-13.12	295	220	V
2	* ** 5.35003	50.62	Pk	34.4	-23	62.02	-	-	74	-11.98	295	220	V
3	* ** 5.35001	36.1	RMS	34.4	-23	47.5	54	-6.5	-	-	295	220	V
4	* ** 5.35685	37.94	RMS	34.4	-23.1	49.24	54	-4.76	-	-	295	220	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

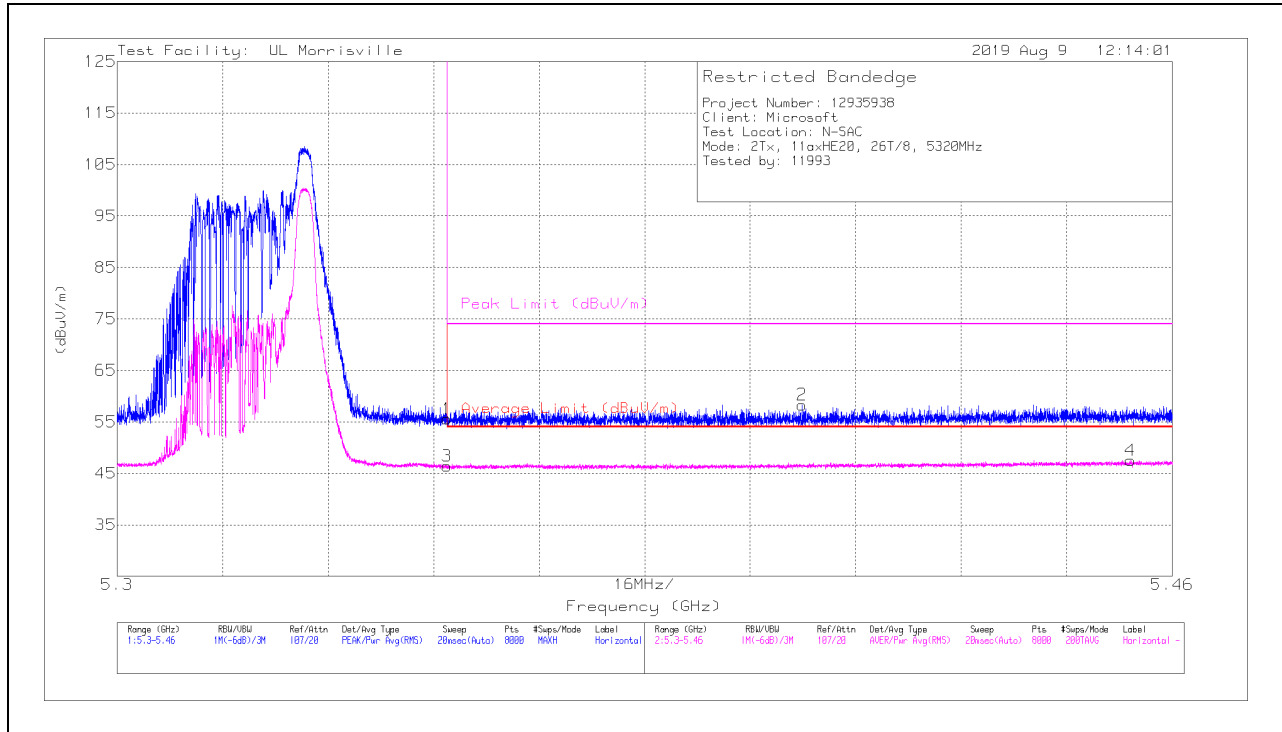

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	44.17	Pk	34.4	-23	55.57	-	-	74	-18.43	58	240	H
2	*** 5.4039	46.89	Pk	34.4	-23	58.29	-	-	74	-15.71	58	240	H
3	*** 5.35001	35.02	RMS	34.4	-23	46.42	54	-7.58	-	-	58	240	H
4	*** 5.45366	36.12	RMS	34.4	-23	47.52	54	-6.48	-	-	58	240	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

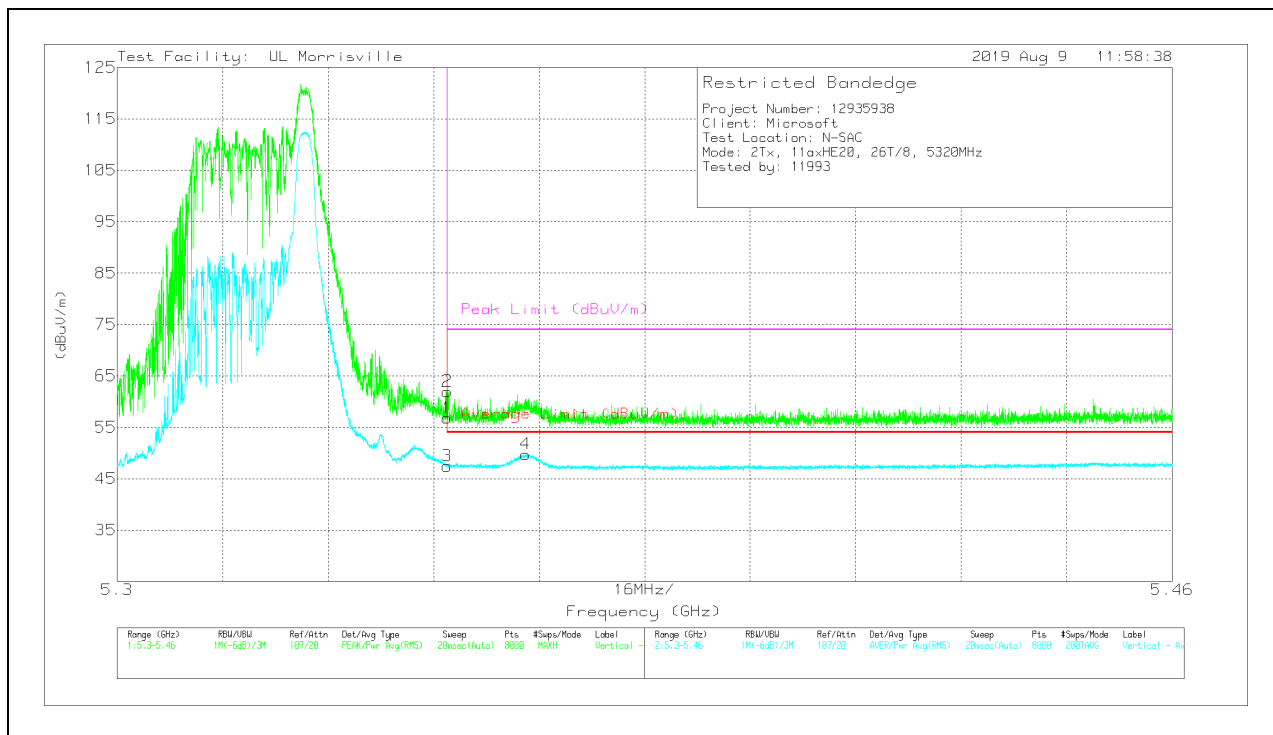


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.4	Pk	34.4	-23	56.8	-	-	74	-17.2	340	244	V
2	* ** 5.35009	50.58	Pk	34.4	-23	61.98	-	-	74	-12.02	340	244	V
3	* ** 5.35001	36.06	RMS	34.4	-23	47.46	54	-6.54	-	-	340	244	V
4	* ** 5.36197	38.47	RMS	34.4	-23.1	49.77	54	-4.23	-	-	340	244	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection


**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8**

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

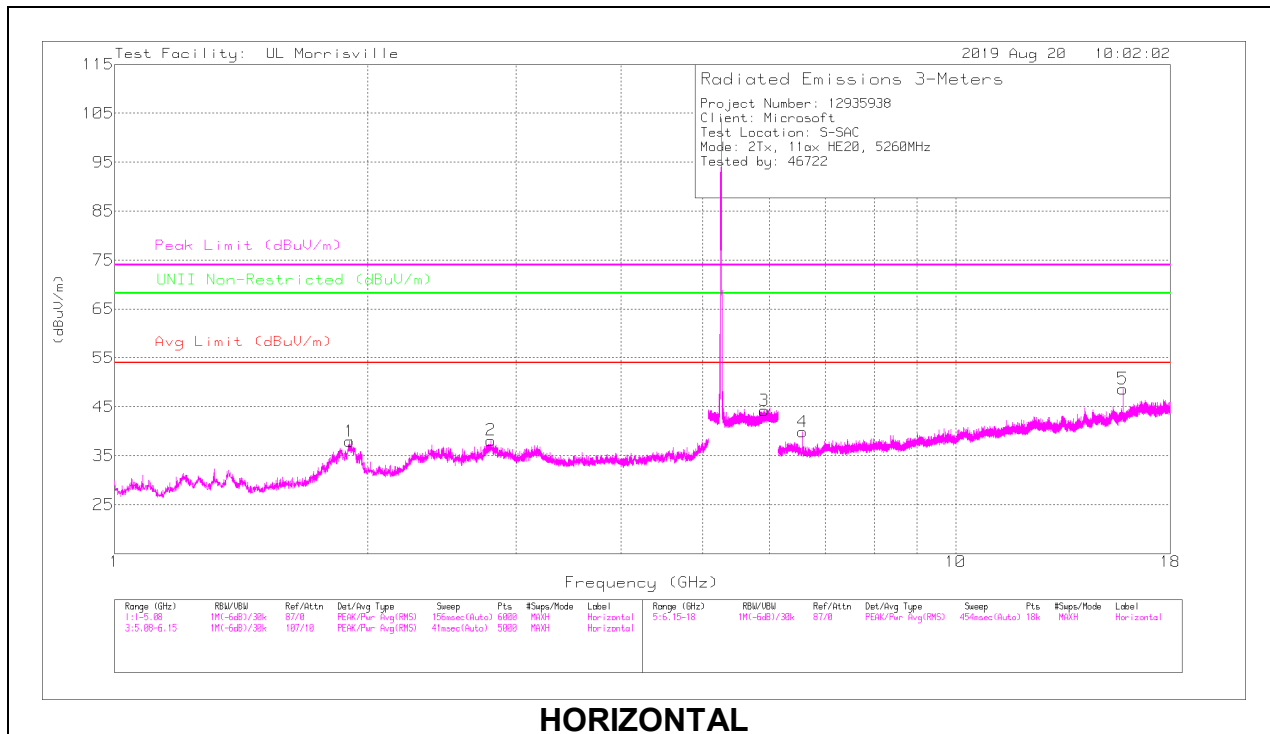

**HORIZONTAL**

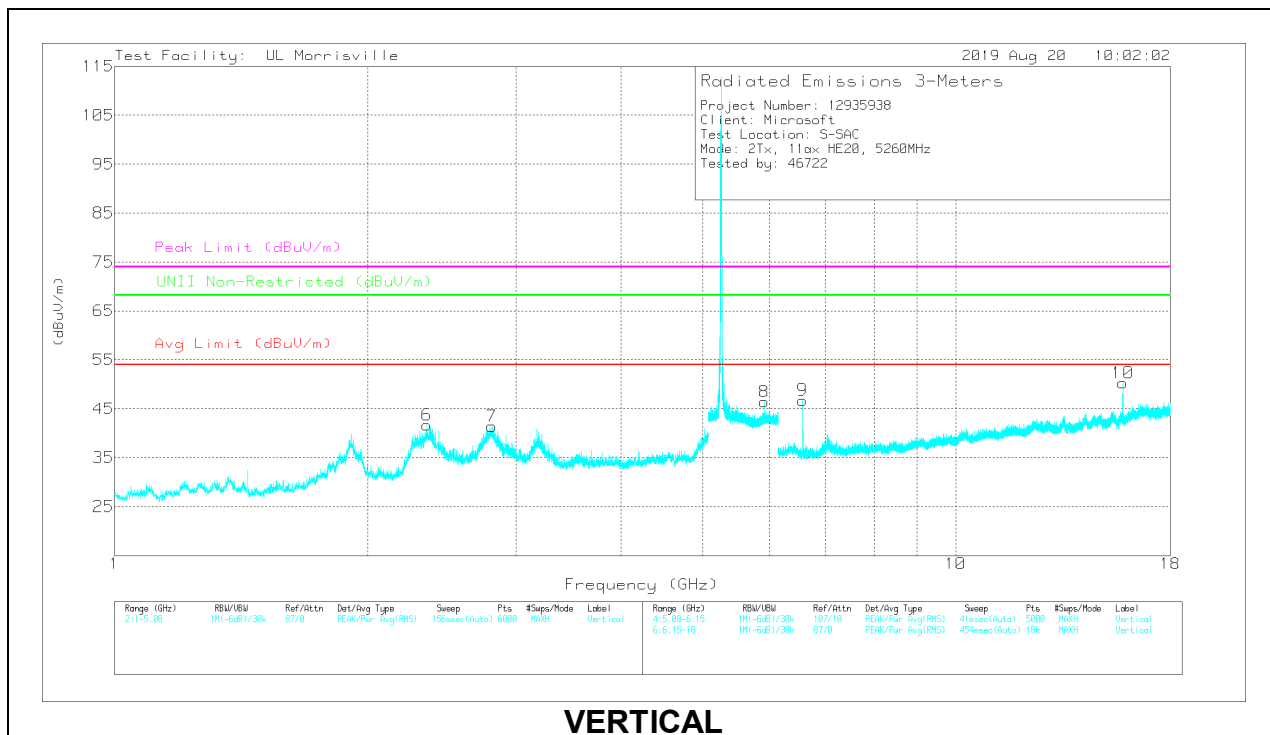

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 1.91463	50.28	PK-U	31.1	-34.2	47.18	-	-	-	-	68.2	-21.02	334	127	H
	** 1.91112	38.2	ADR	31.1	-34.2	35.1	54	-18.9	-	-	-	-	334	127	H
2	*** 2.82234	47.43	PK-U	32.1	-33.6	45.93	-	-	74	-28.07	-	-	8	178	H
	*** 2.82889	34.43	ADR	32.1	-33.6	32.93	54	-21.07	-	-	-	-	8	178	H
5	*** 15.804	41.24	PK-U	40.4	-23.4	58.24	-	-	74	-15.76	-	-	327	339	H
	*** 15.80537	31.24	ADR	40.4	-23.4	48.24	54	-5.76	-	-	-	-	327	339	H
3	5.92523	39.02	PK-U	34.9	-22.9	51.02	-	-	-	-	68.2	-17.18	60	335	H
4	6.57503	40.34	PK-U	35.5	-28.9	46.94	-	-	-	-	68.2	-21.26	356	101	H
6	*** 2.34467	51.18	PK-U	31.6	-34	48.78	-	-	74	-25.22	-	-	95	267	V
	*** 2.34917	39.53	ADR	31.6	-34	37.13	54	-16.87	-	-	-	-	95	267	V
7	*** 2.8133	52.08	PK-U	32.1	-33.5	50.68	-	-	74	-23.32	-	-	99	238	V
	*** 2.82068	40.77	ADR	32.1	-33.6	39.27	54	-14.73	-	-	-	-	99	238	V
10	*** 15.80425	46.59	PK-U	40.4	-23.4	63.59	-	-	74	-10.41	-	-	26	283	V
	*** 15.80548	36.17	ADR	40.4	-23.4	53.17	54	-8.3	-	-	-	-	26	283	V
8	5.92606	40.1	PK-U	34.9	-22.9	52.1	-	-	-	-	68.2	-16.1	64	205	V
9	6.5751	46.5	PK-U	35.5	-28.9	53.1	-	-	-	-	68.2	-15.1	18	249	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### MID CHANNEL RESULTS

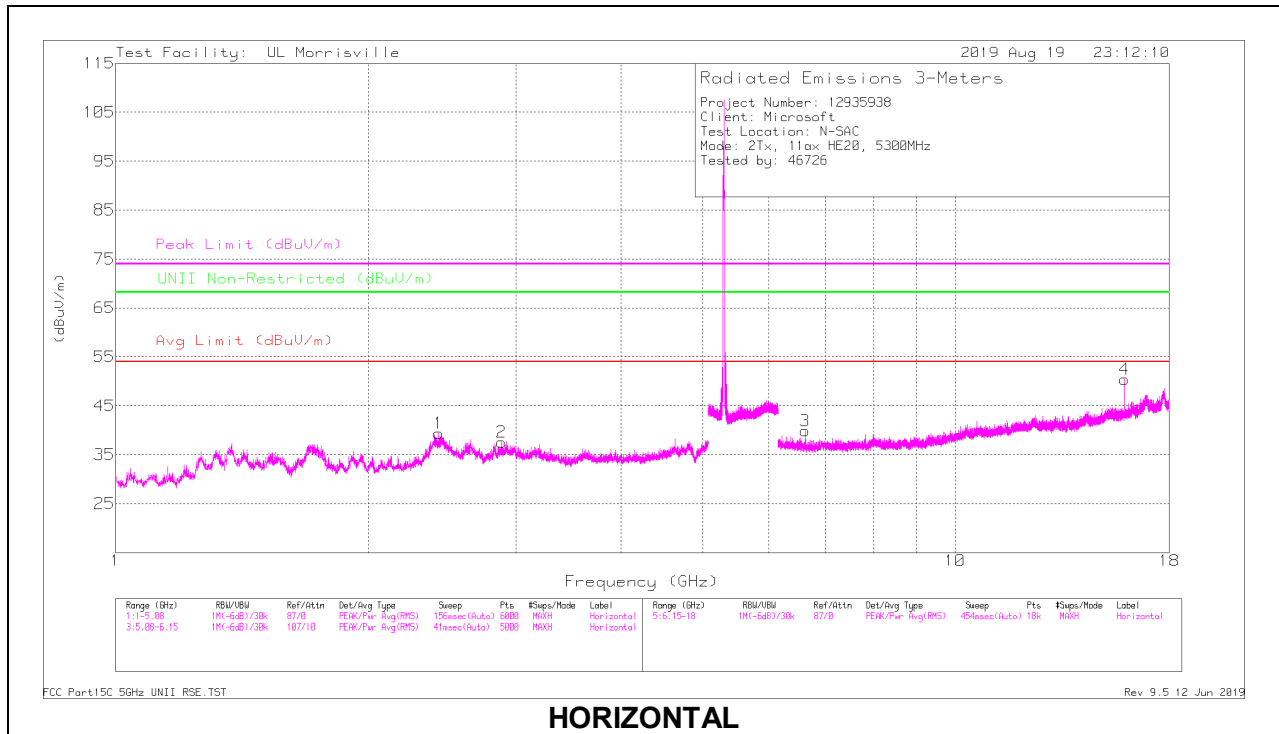

**HORIZONTAL**

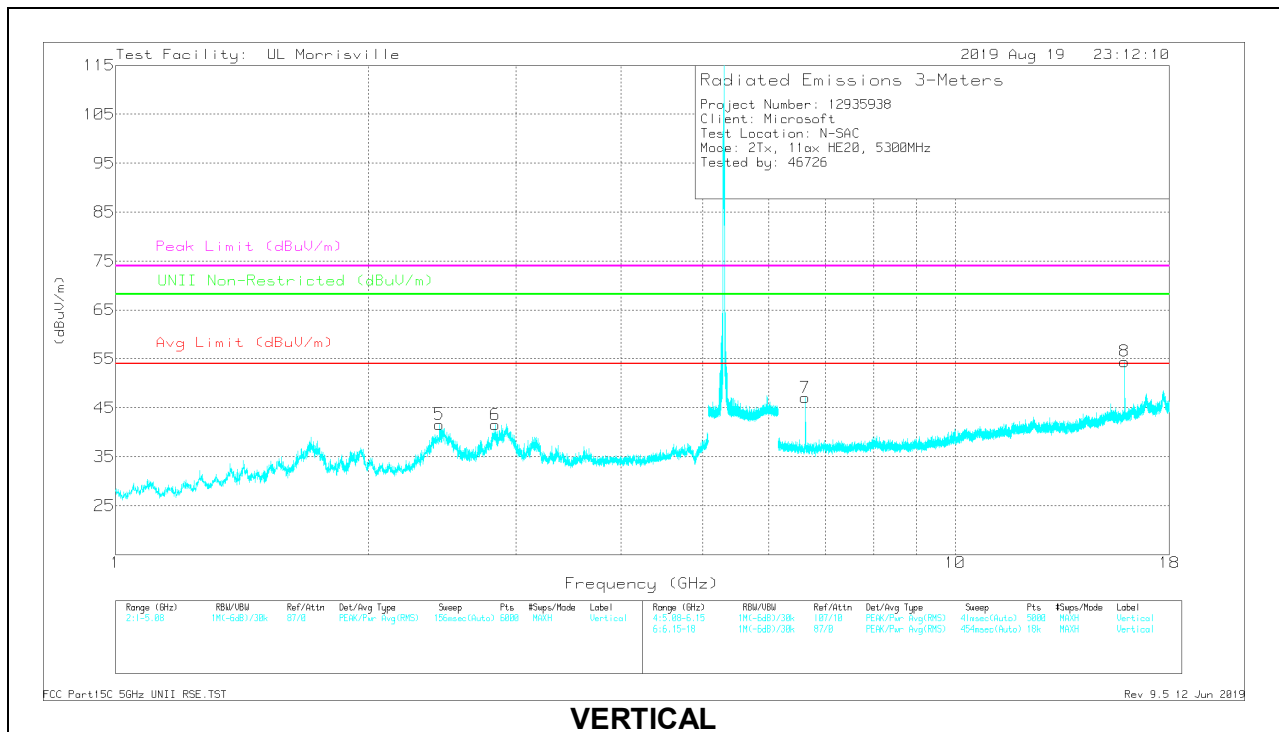


**VERTICAL**

**RADIATED EMISSIONS**


Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 2.86749	46.85	PK-U	32.5	-33.9	45.45	-	-	74	-28.55	-	-	76	171	H
	*** 2.86767	34.83	ADR	32.5	-33.9	33.43	54	-20.57	-	-	-	-	76	171	H
6	*** 2.81474	49.98	PK-U	32.4	-33.9	48.48	-	-	74	-25.52	-	-	32	215	V
	*** 2.81498	38.45	ADR	32.4	-33.9	36.95	54	-17.05	-	-	-	-	32	215	V
4	*** 15.92417	47.13	PK-U	40.3	-26.5	60.93	-	-	74	-13.07	-	-	260	366	H
	*** 15.92417	33.9	ADR	40.3	-26.5	47.7	54	-6.3	-	-	-	-	260	366	H
8	*** 15.92508	48.47	PK-U	40.3	-26.5	62.27	-	-	74	-11.73	-	-	310	127	V
	*** 15.92509	36.78	ADR	40.3	-26.5	50.58	54	-3.42	-	-	-	-	310	127	V
5	2.41181	51.54	PK-U	32	-34	49.54	-	-	-	-	68.2	-18.66	40	190	V
1	2.4202	46.73	PK-U	32.1	-34	44.83	-	-	-	-	68.2	-23.37	285	273	H
3	6.62494	44.17	PK-U	35.5	-30.7	48.97	-	-	-	-	68.2	-19.23	20	373	H
7	6.62509	47.05	PK-U	35.5	-30.7	51.85	-	-	-	-	68.2	-16.35	343	237	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL RESULTS

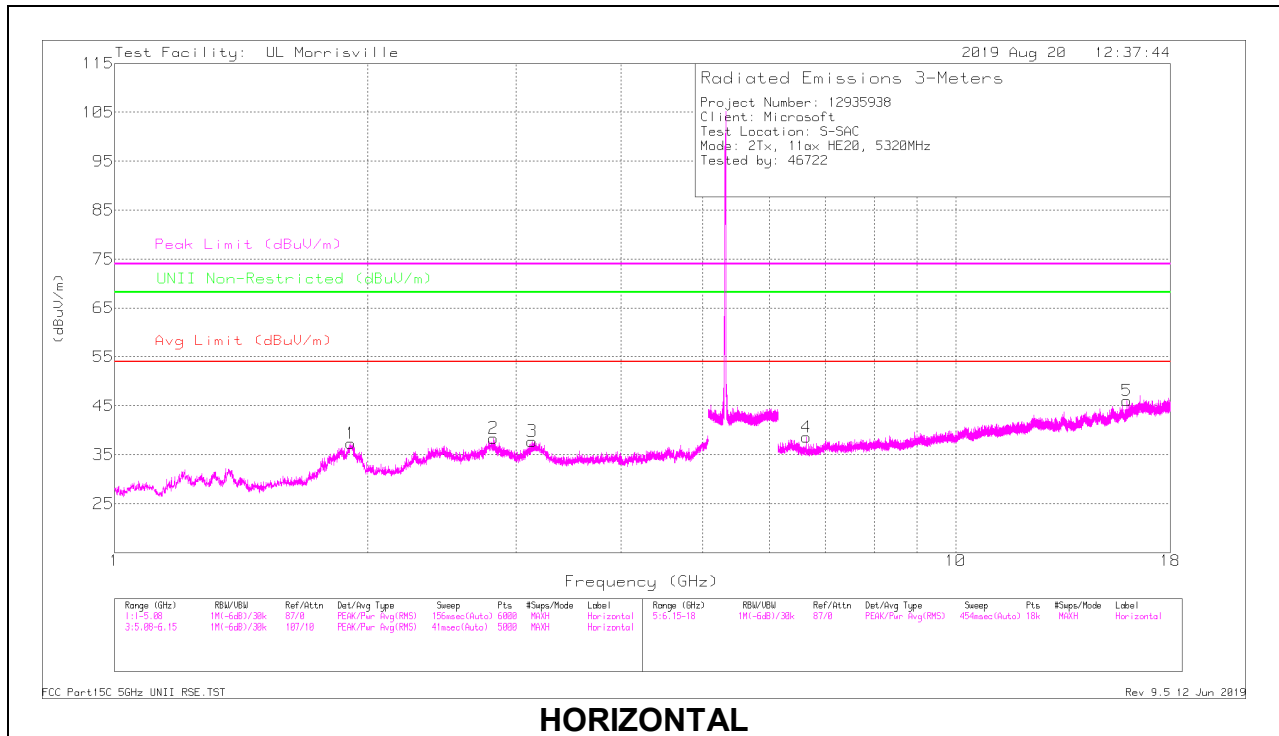

**HORIZONTAL**

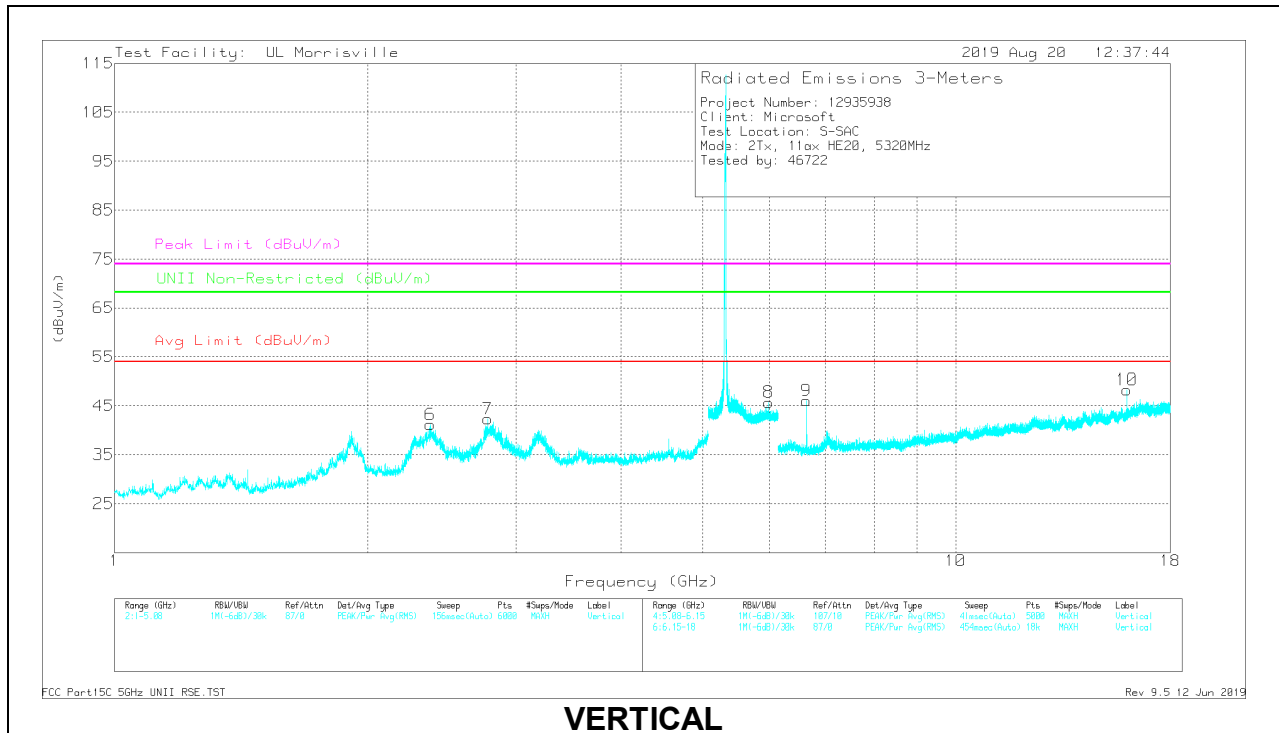

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 1.91024	48.69	PK-U	31.1	-34.2	0	45.59	-	-	-	-	68.2	-22.61	326	118	H
	** 1.90922	36.67	ADR	31.1	-34.1	0	33.67	-	-	-	-	-	-	326	118	H
2	*** 2.87674	48.3	PK-U	32.5	-33.6	0	47.2	-	-	74	-26.8	-	-	8	137	H
	*** 2.82988	36.17	ADR	32.1	-33.6	0	34.67	54	-19.33	-	-	-	-	8	137	H
5	*** 15.98405	43.02	PK-U	40.7	-24.1	0	59.62	-	-	74	-14.38	-	-	342	335	H
	*** 15.98552	32.37	ADR	40.7	-24.1	0	48.97	54	-5.03	-	-	-	-	342	335	H
3	3.15276	45.44	PK-U	33.2	-33.3	0	45.34	-	-	-	-	68.2	-22.86	292	107	H
4	6.65002	40.47	PK-U	35.5	-29	0	46.97	-	-	-	-	68.2	-21.23	77	386	H
6	*** 2.35753	51.43	PK-U	31.7	-34	0	49.13	-	-	74	-24.87	-	-	96	238	V
	*** 2.35428	39.74	ADR	31.7	-34	0	37.44	54	-16.56	-	-	-	-	96	238	V
7	*** 2.82038	52.28	PK-U	32.1	-33.6	0	50.78	-	-	74	-23.22	-	-	101	239	V
	*** 2.81768	40.71	ADR	32.1	-33.6	0	39.21	54	-14.79	-	-	-	-	101	239	V
10	*** 15.98328	43.98	PK-U	40.7	-24.1	0	60.58	-	-	74	-13.42	-	-	24	274	V
	*** 15.98546	32.93	ADR	40.7	-24.1	0	49.53	54	-4.47	-	-	-	-	24	274	V
8	5.99346	40.56	PK-U	35	-22.9	0	52.66	-	-	-	-	68.2	-15.54	356	237	V
9	6.64997	44.7	PK-U	35.5	-29	0	51.2	-	-	-	-	68.2	-17	53	255	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 PK-U - U-NII: Maximum Peak  
 ADR - U-NII AD primary method, RMS average




### 10.1.5. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.3 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – SU MODE

#### BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL RESULT

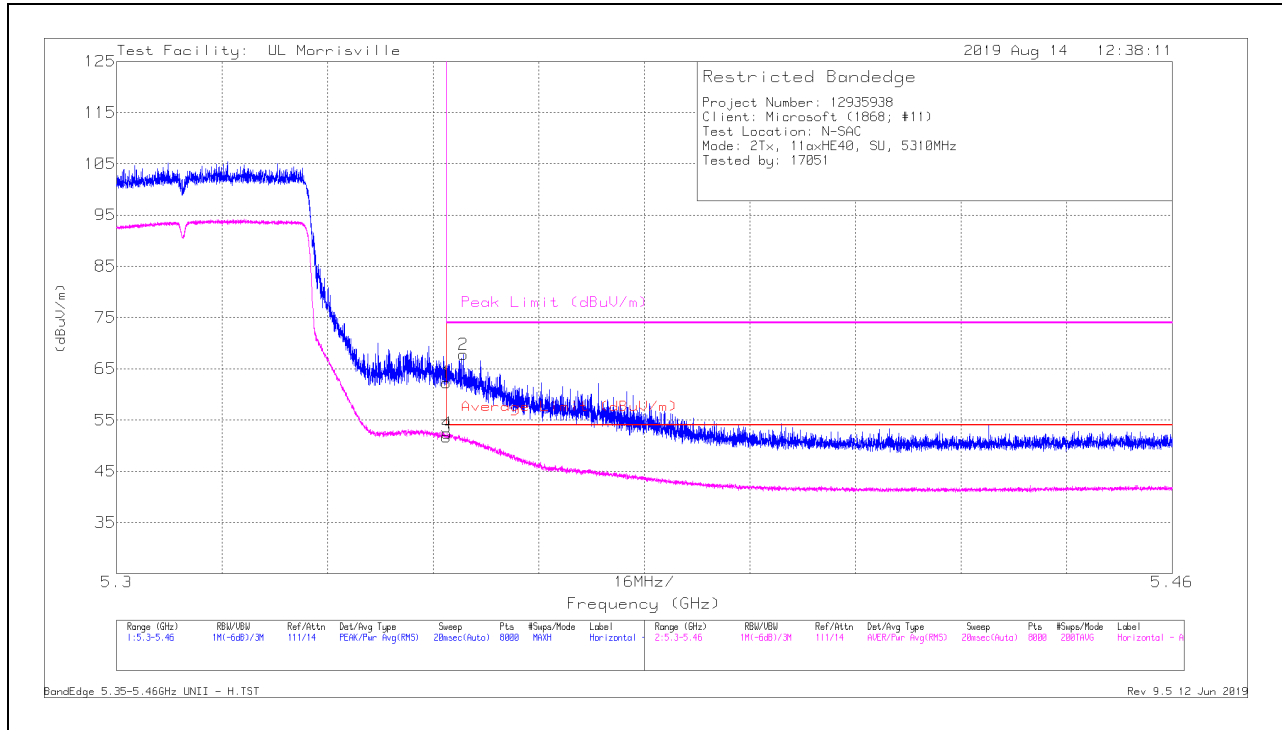

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	50.9	Pk	34.4	-23	62.3	-	-	74	-11.7	353	371	H
2	* ** 5.35253	56.49	Pk	34.4	-23.1	67.79	-	-	74	-6.21	353	371	H
3	* ** 5.35001	40.34	RMS	34.4	-23	51.74	54	-2.26	-	-	353	371	H
4	* ** 5.35005	41.04	RMS	34.4	-23	52.44	54	-1.56	-	-	353	371	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

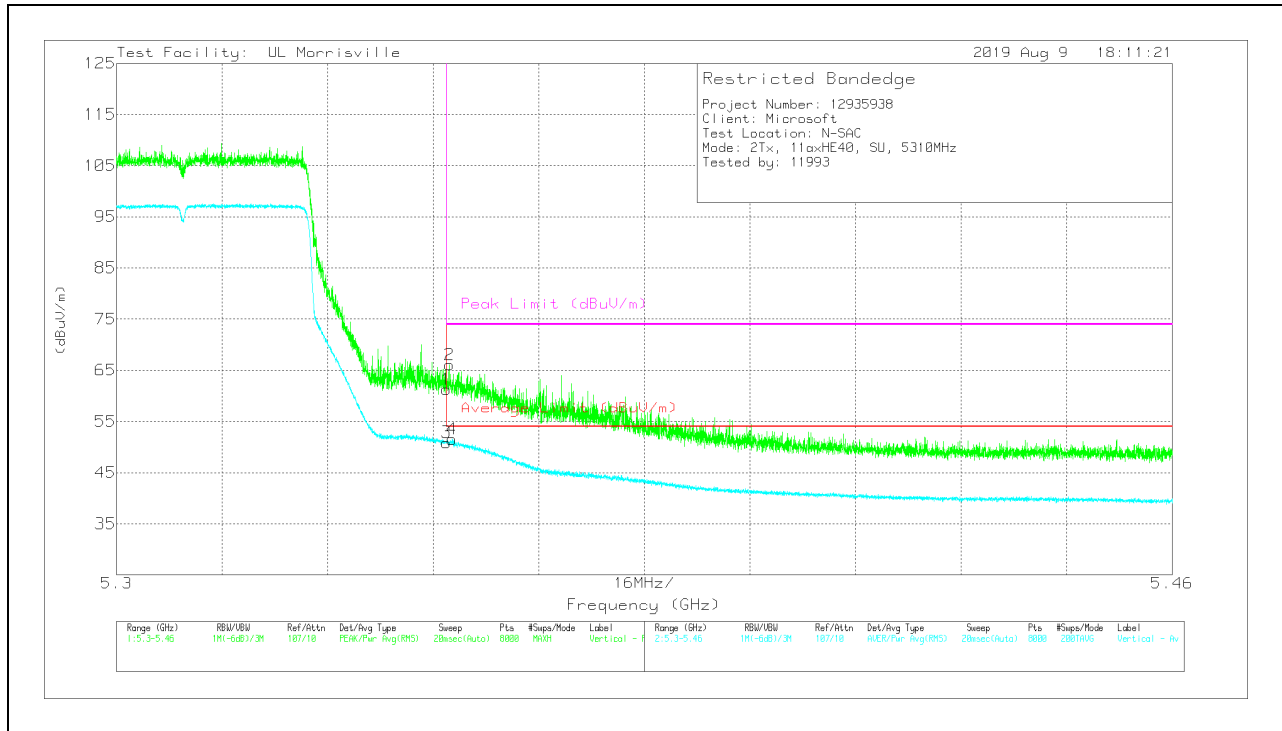


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	49.9	Pk	34.4	-23	61.3	-	-	74	-12.7	345	223	V
2	* ** 5.35049	54.66	Pk	34.4	-23	66.06	-	-	74	-7.94	345	223	V
3	* ** 5.35001	39.49	RMS	34.4	-23	50.89	54	-3.11	-	-	345	223	V
4	* ** 5.35085	40.12	RMS	34.4	-23	51.52	54	-2.48	-	-	345	223	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

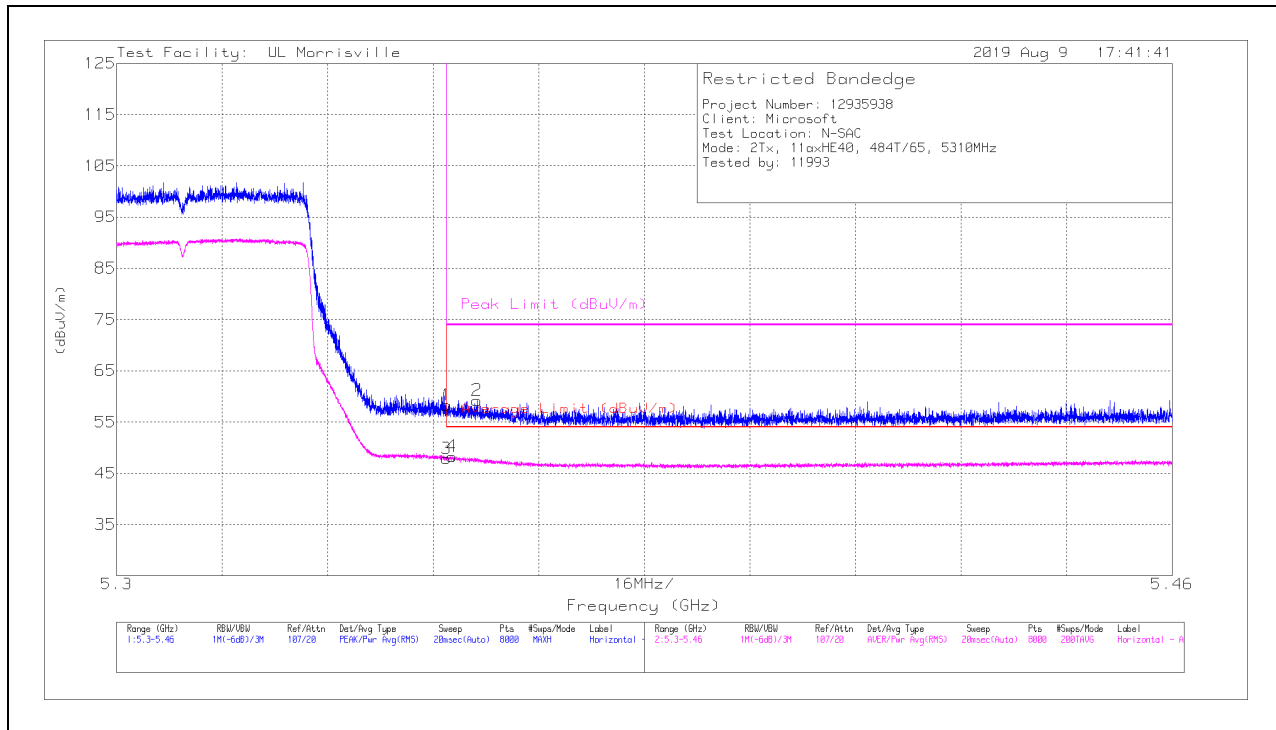

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* * * 5.35001	46.89	Pk	34.4	-23	58.29	-	-	74	-15.71	331	287	H
2	* * * 5.35461	47.93	Pk	34.4	-23.1	59.23	-	-	74	-14.77	331	287	H
3	* * * 5.35001	36.45	RMS	34.4	-23	47.85	54	-6.15	-	-	331	287	H
4	* * * 5.35081	36.9	RMS	34.4	-23	48.3	54	-5.7	-	-	331	287	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

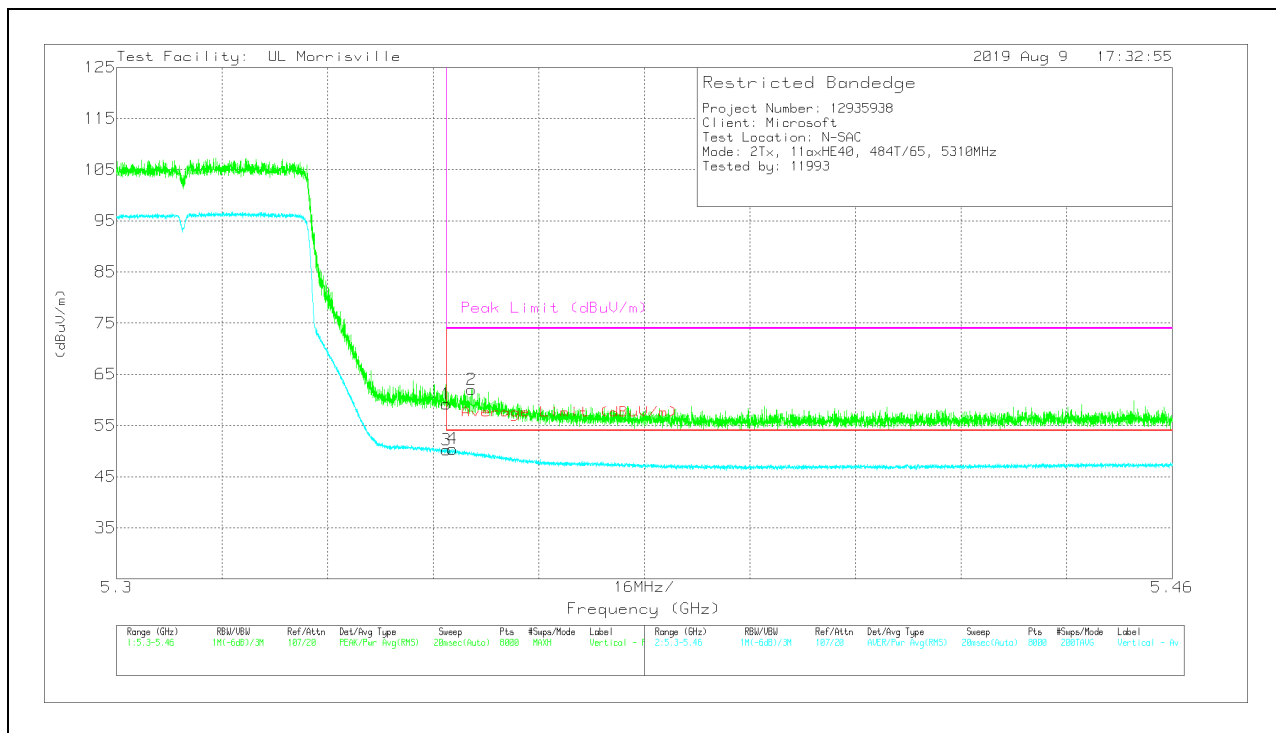


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	47.82	Pk	34.4	-23	59.22	-	-	74	-14.78	306	230	V
2	* ** 5.35383	50.7	Pk	34.4	-23.1	62	-	-	74	-12	306	230	V
3	* ** 5.35001	38.8	RMS	34.4	-23	50.2	54	-3.8	-	-	306	230	V
4	* ** 5.35093	39.01	RMS	34.4	-23	50.41	54	-3.59	-	-	306	230	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 62**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

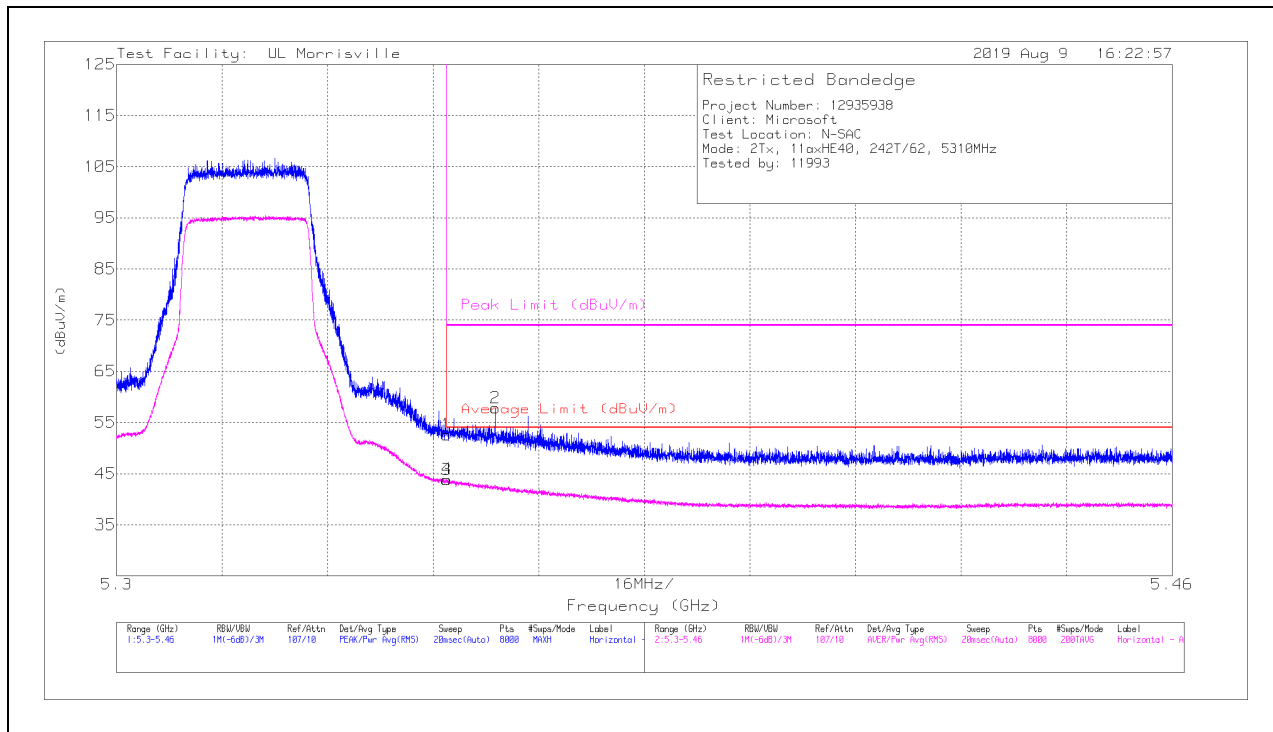

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	41.2	Pk	34.4	-23	52.6	-	-	74	-21.4	339	230	H
2	* ** 5.35743	46.53	Pk	34.4	-23.1	57.83	-	-	74	-16.17	339	230	H
3	* ** 5.35001	32.4	RMS	34.4	-23	43.8	54	-10.2	-	-	339	230	H
4	* ** 5.35011	32.49	RMS	34.4	-23	43.89	54	-10.11	-	-	339	230	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

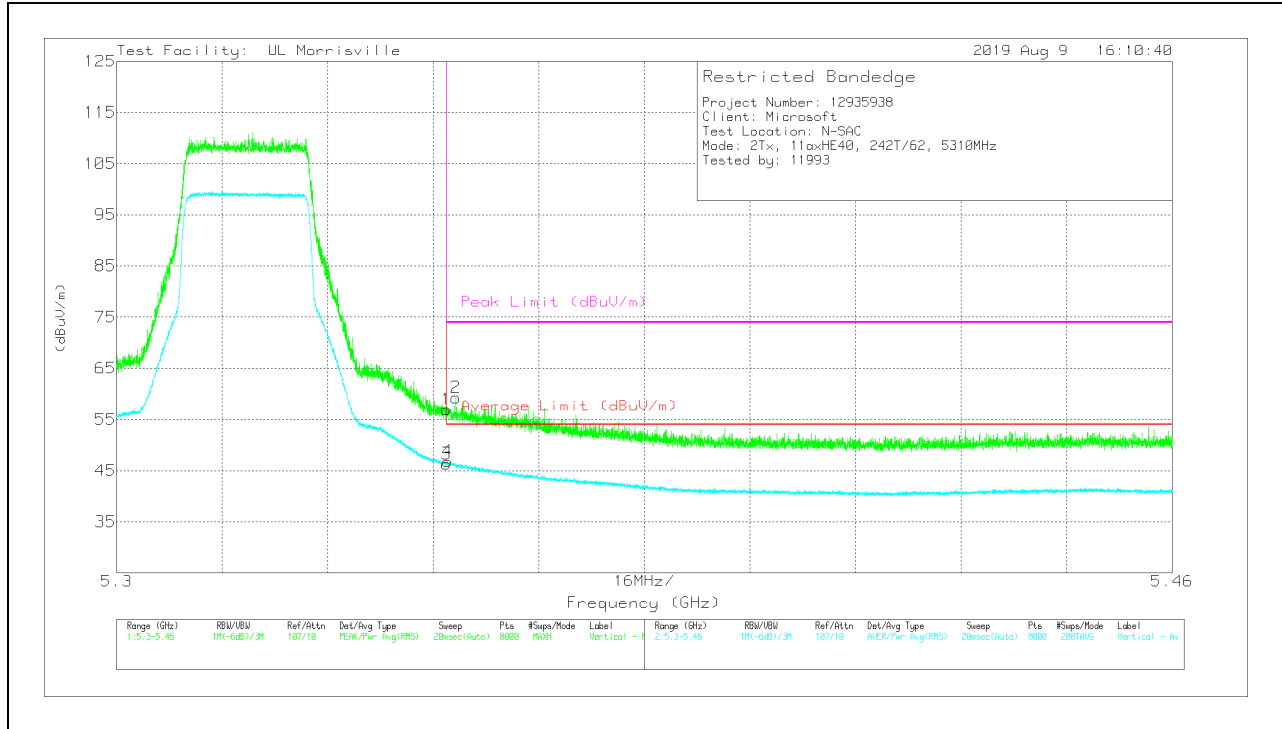


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.61	Pk	34.4	-23	57.01	-	-	74	-16.99	316	272	V
2	* ** 5.35143	47.86	Pk	34.4	-23	59.26	-	-	74	-14.74	316	272	V
3	* ** 5.35001	34.93	RMS	34.4	-23	46.33	54	-7.67	-	-	316	272	V
4	* ** 5.35017	35.41	RMS	34.4	-23	46.81	54	-7.19	-	-	316	272	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 56**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

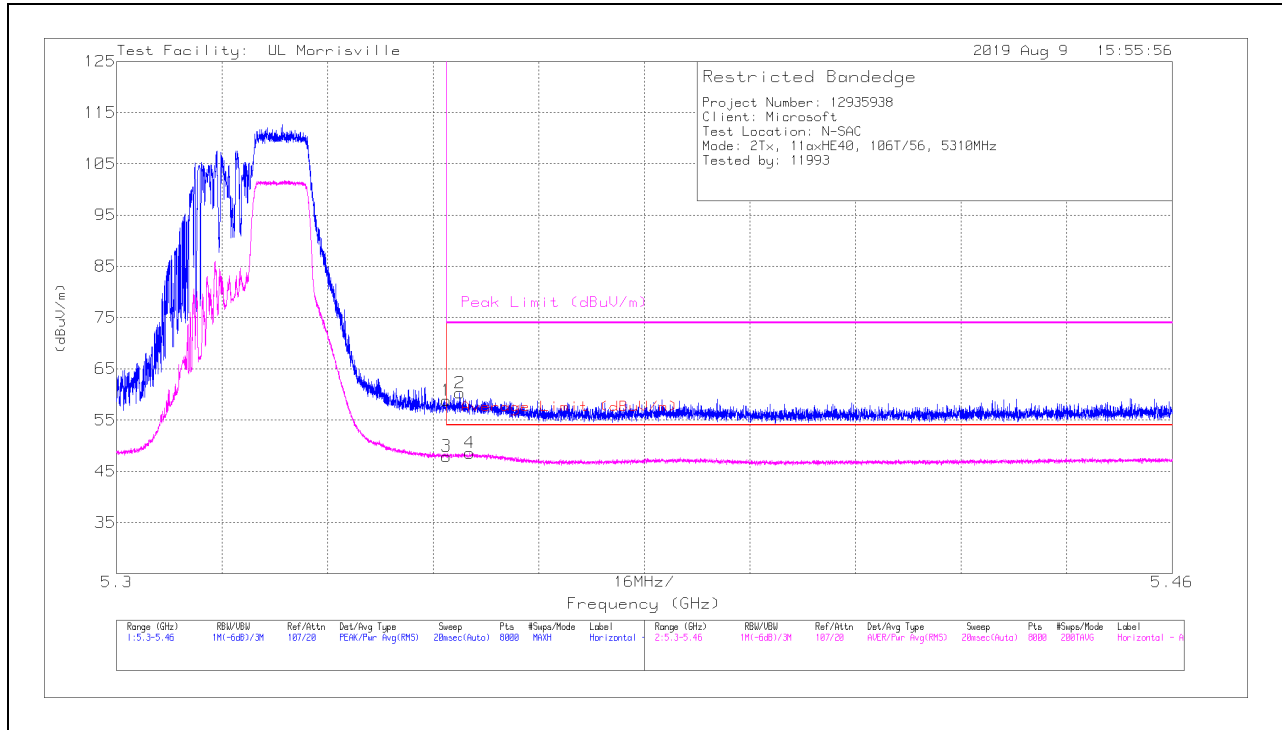

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	47.39	Pk	34.4	-23	58.79	-	-	74	-15.21	329	372	H
2	** * 5.35203	48.91	Pk	34.4	-23	60.31	-	-	74	-13.69	329	372	H
3	** * 5.35001	36.54	RMS	34.4	-23	47.94	54	-6.06	-	-	329	372	H
4	** * 5.35349	37.27	RMS	34.4	-23.1	48.57	54	-5.43	-	-	329	372	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

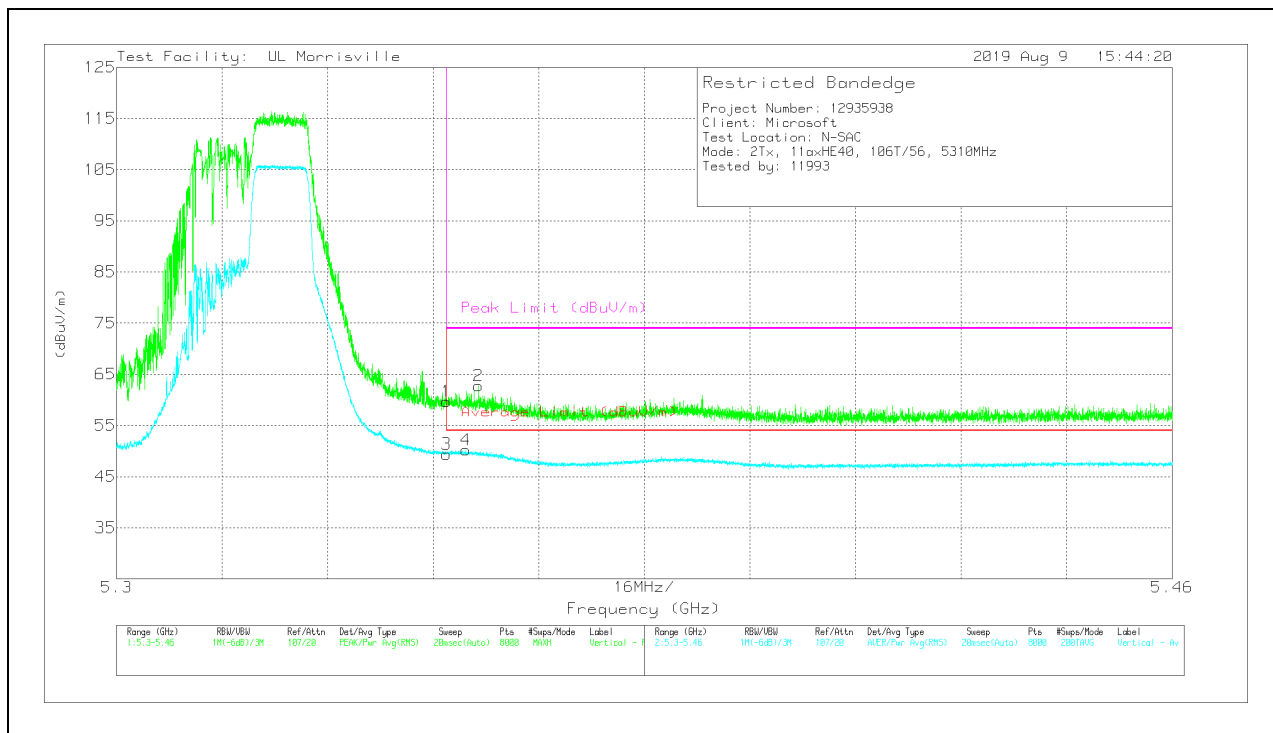

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	48.29	Pk	34.4	-23	59.69	-	-	74	-14.31	348	243	V
2	* ** 5.35487	51.42	Pk	34.4	-23.1	62.72	-	-	74	-11.28	348	243	V
3	* ** 5.35001	38	RMS	34.4	-23	49.4	54	-4.6	-	-	348	243	V
4	* ** 5.35293	38.89	RMS	34.4	-23.1	50.19	54	-3.81	-	-	348	243	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 44**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

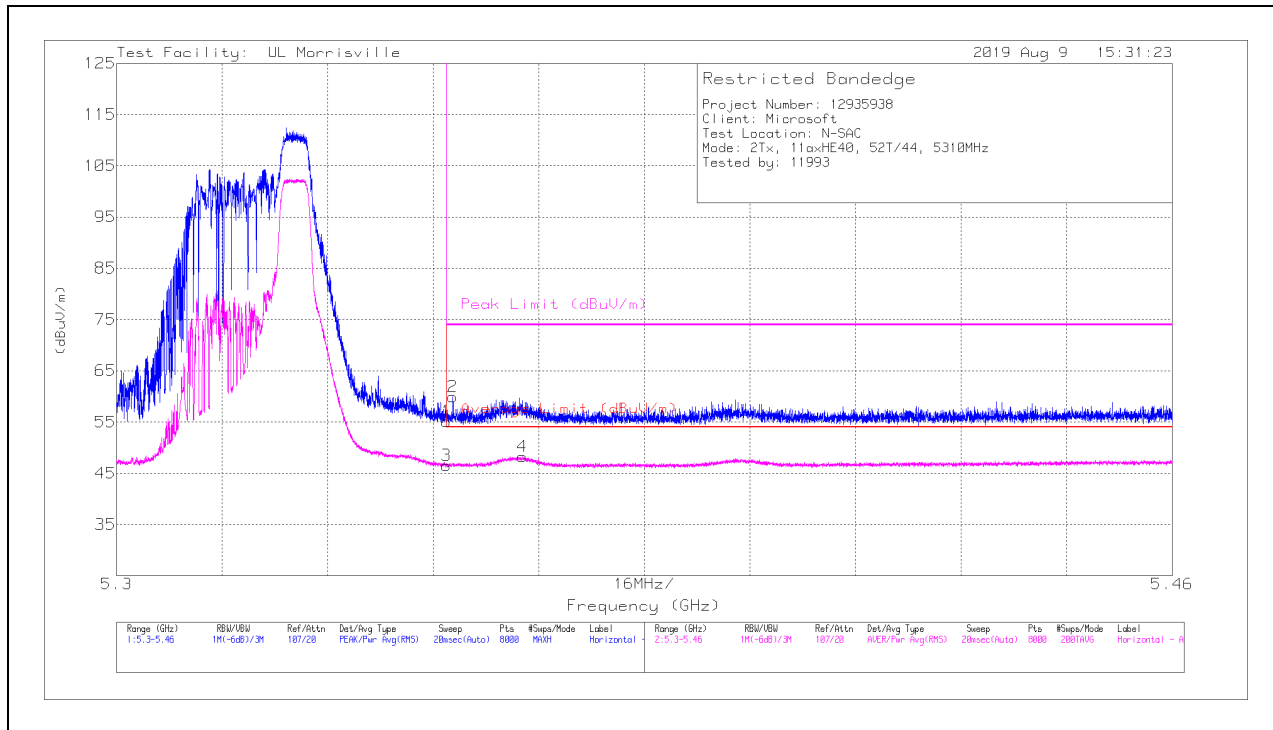

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	43.72	Pk	34.4	-23	55.12	-	-	74	-18.88	336	318	H
2	** * 5.35097	48.55	Pk	34.4	-23	59.95	-	-	74	-14.05	336	318	H
3	** * 5.35001	35.13	RMS	34.4	-23	46.53	54	-7.47	-	-	336	318	H
4	** * 5.36149	36.92	RMS	34.4	-23.1	48.22	54	-5.78	-	-	336	318	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

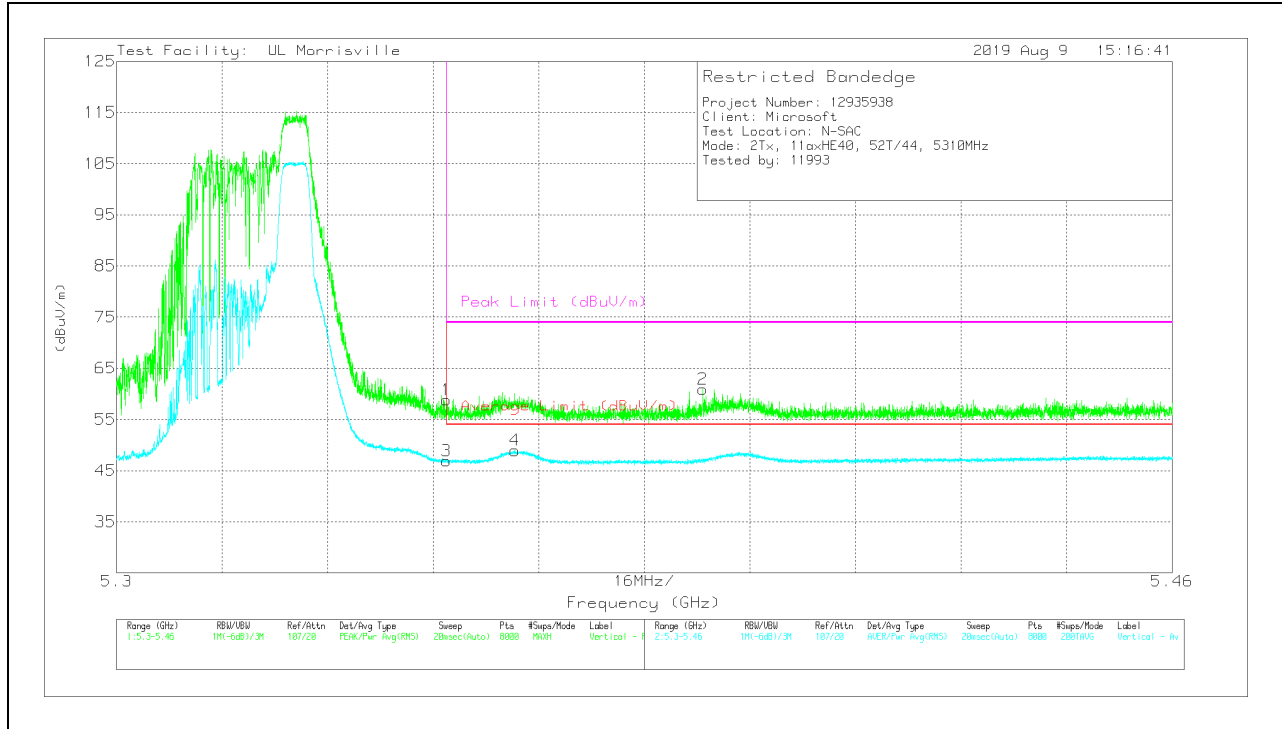


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	47.41	Pk	34.4	-23	58.81	-	-	74	-15.19	1	248	V
2	* ** 5.38887	49.6	Pk	34.4	-23.1	60.9	-	-	74	-13.1	1	248	V
3	* ** 5.35001	35.47	RMS	34.4	-23	46.87	54	-7.13	-	-	1	248	V
4	* ** 5.36033	37.64	RMS	34.4	-23.1	48.94	54	-5.06	-	-	1	248	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 17**

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

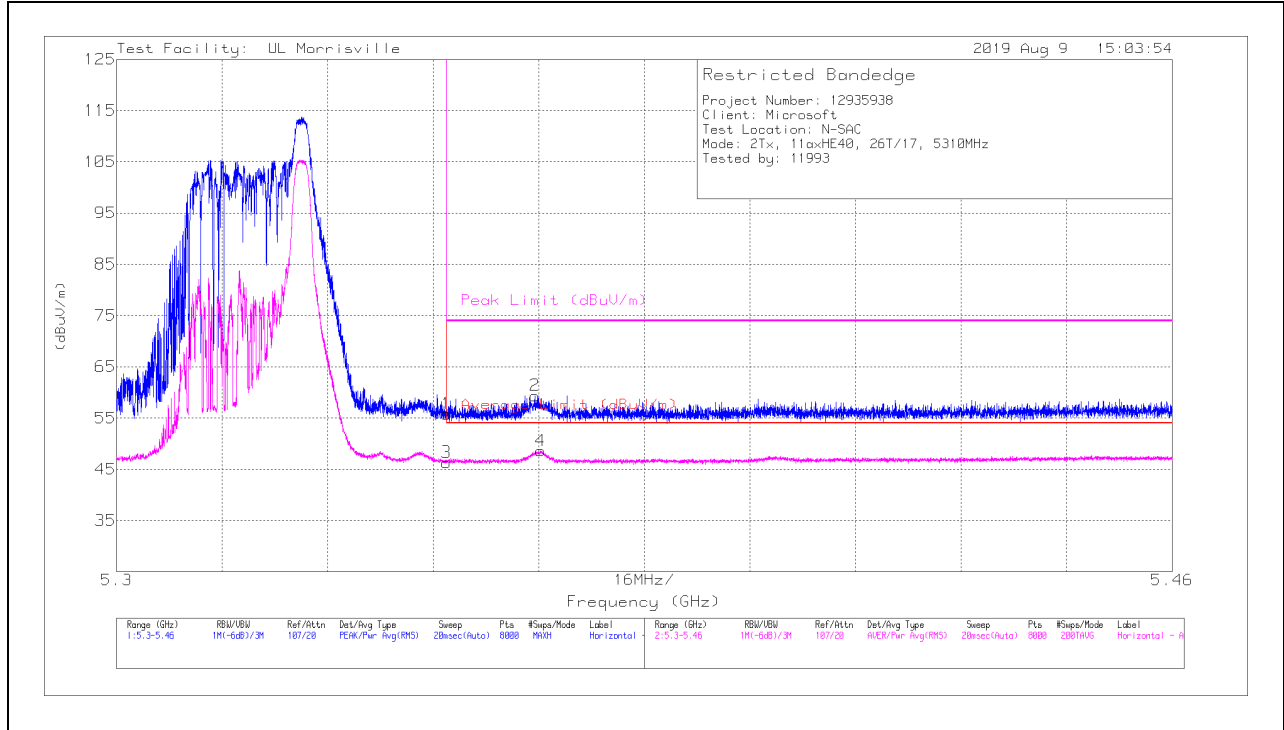

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	44.42	Pk	34.4	-23	55.82	-	-	74	-18.18	345	388	H
2	*** 5.36341	48.08	Pk	34.4	-23.1	59.38	-	-	74	-14.62	345	388	H
3	*** 5.35001	34.92	RMS	34.4	-23	46.32	54	-7.68	-	-	345	388	H
4	*** 5.36429	37.3	RMS	34.4	-23.1	48.6	54	-5.4	-	-	345	388	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

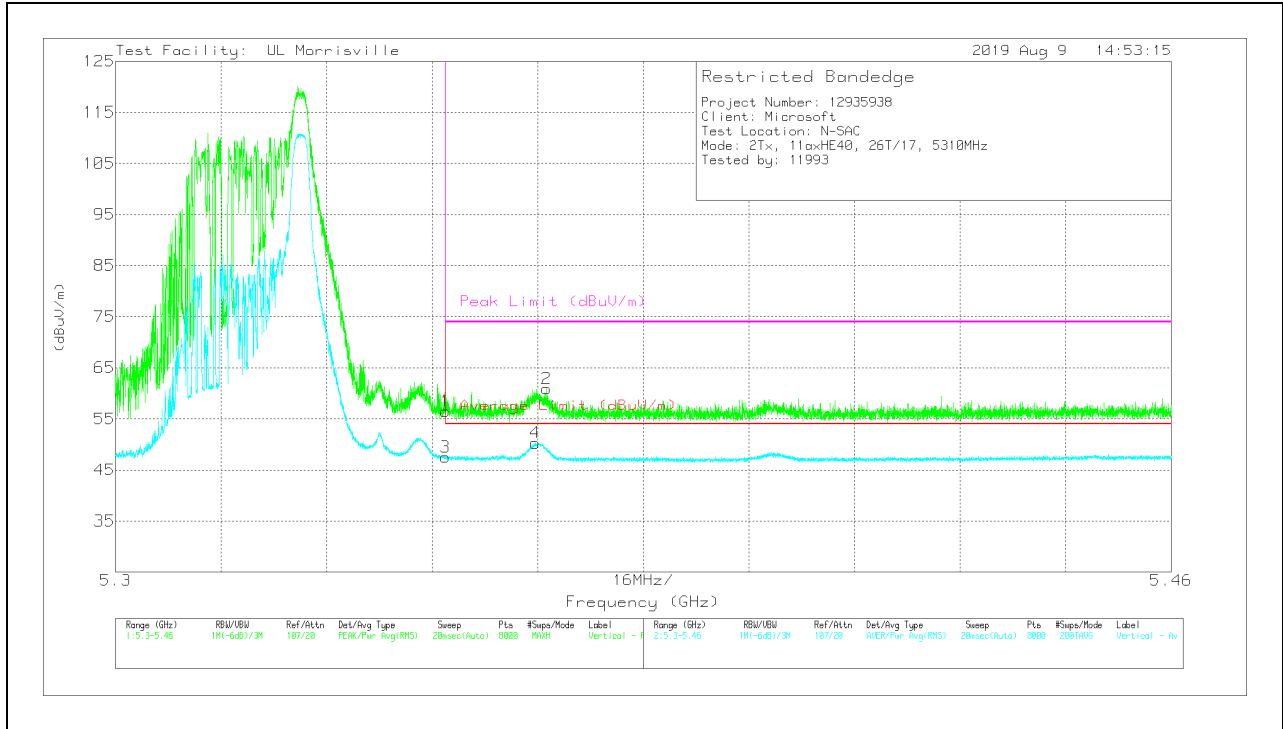

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	45.11	Pk	34.4	-23	56.51	-	-	74	-17.49	336	298	V
3	*** 5.35001	36.11	RMS	34.4	-23	47.51	54	-6.49	-	-	336	298	V
4	*** 5.36361	38.99	RMS	34.4	-23.1	50.29	54	-3.71	-	-	336	298	V
2	*** 5.36531	49.51	Pk	34.4	-23	60.91	-	-	74	-13.09	336	298	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.1.6. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.3 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – SU MODE

#### BANDEDGE (MID CHANNEL)

#### HORIZONTAL RESULT

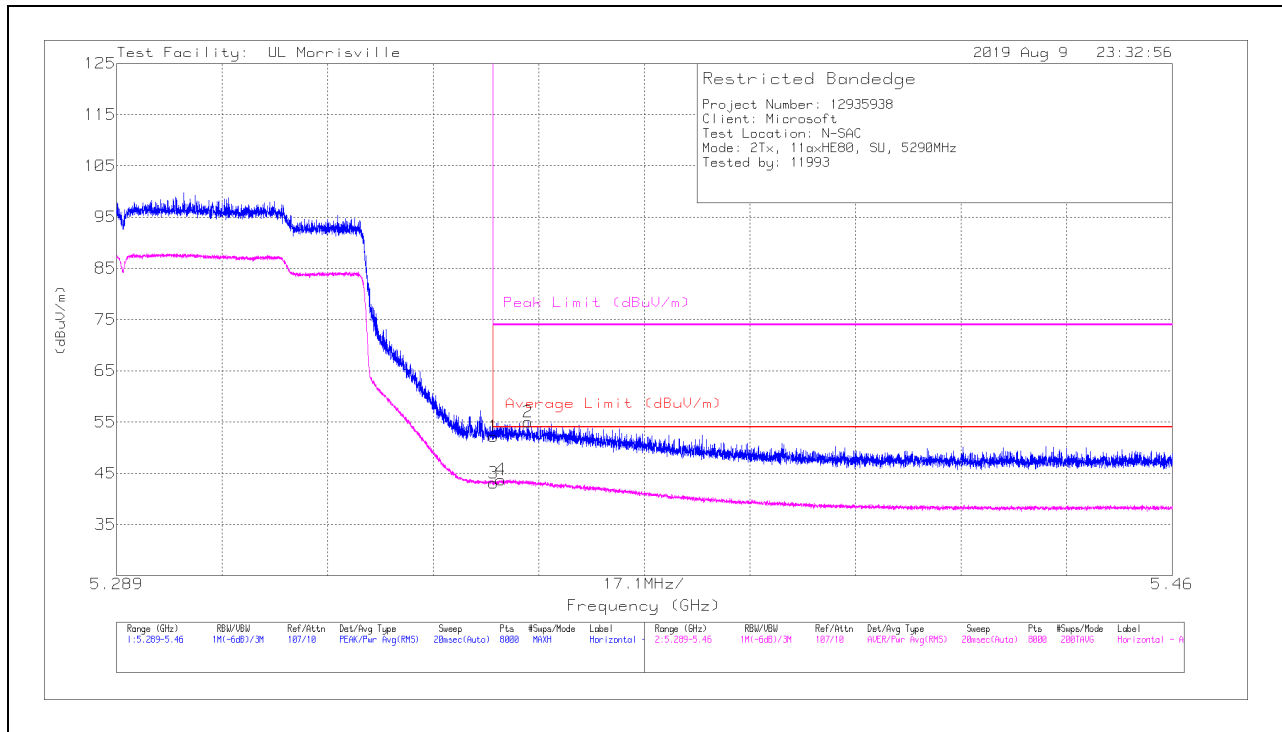

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	40.76	Pk	34.4	-23	52.16	-	-	74	-21.84	340	271	H
2	*** 5.35566	43.69	Pk	34.4	-23.1	54.99	-	-	74	-19.01	340	271	H
3	*** 5.35001	31.72	RMS	34.4	-23	43.12	54	-10.88	-	-	340	271	H
4	*** 5.35123	32.35	RMS	34.4	-23	43.75	54	-10.25	-	-	340	271	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

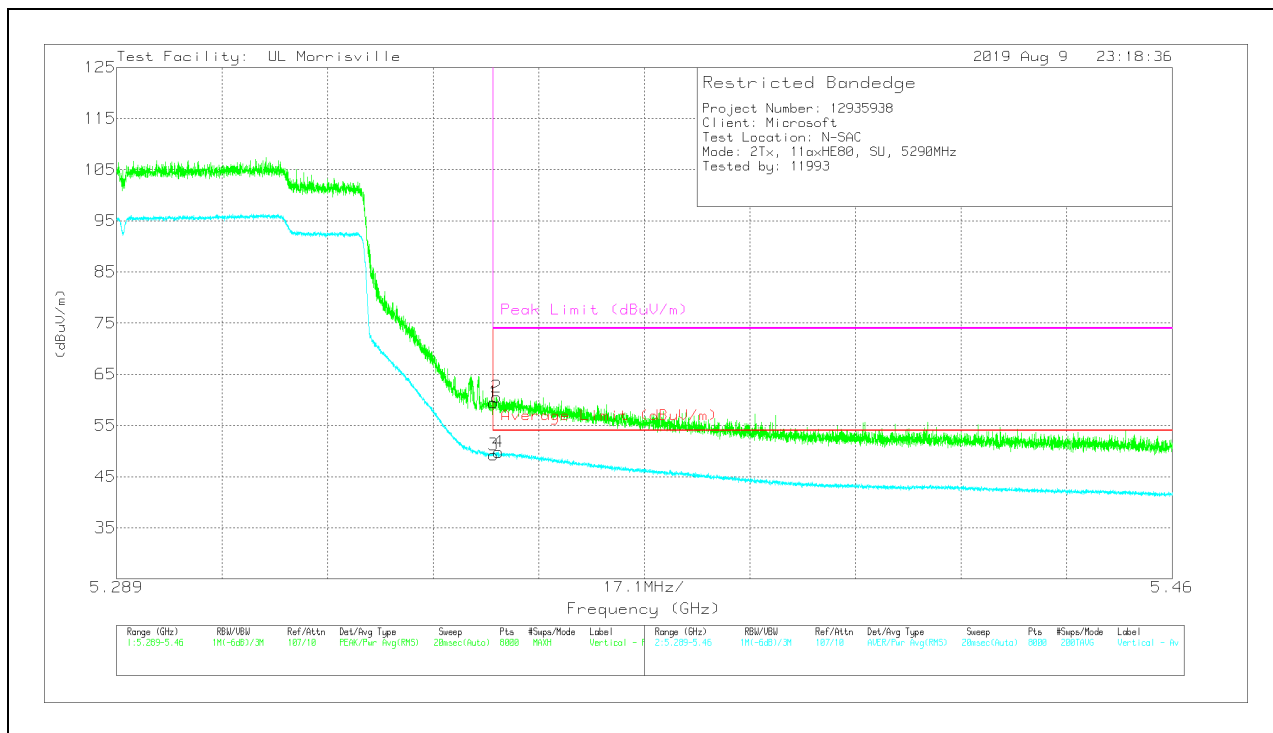


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	48.1	Pk	34.4	-23	59.5	-	-	74	-14.5	299	272	V
2	* ** 5.35055	49.18	Pk	34.4	-23	60.58	-	-	74	-13.42	299	272	V
3	* ** 5.35001	37.89	RMS	34.4	-23	49.29	54	-4.71	-	-	299	272	V
4	* ** 5.35089	38.4	RMS	34.4	-23	49.8	54	-4.2	-	-	299	272	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index 67**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

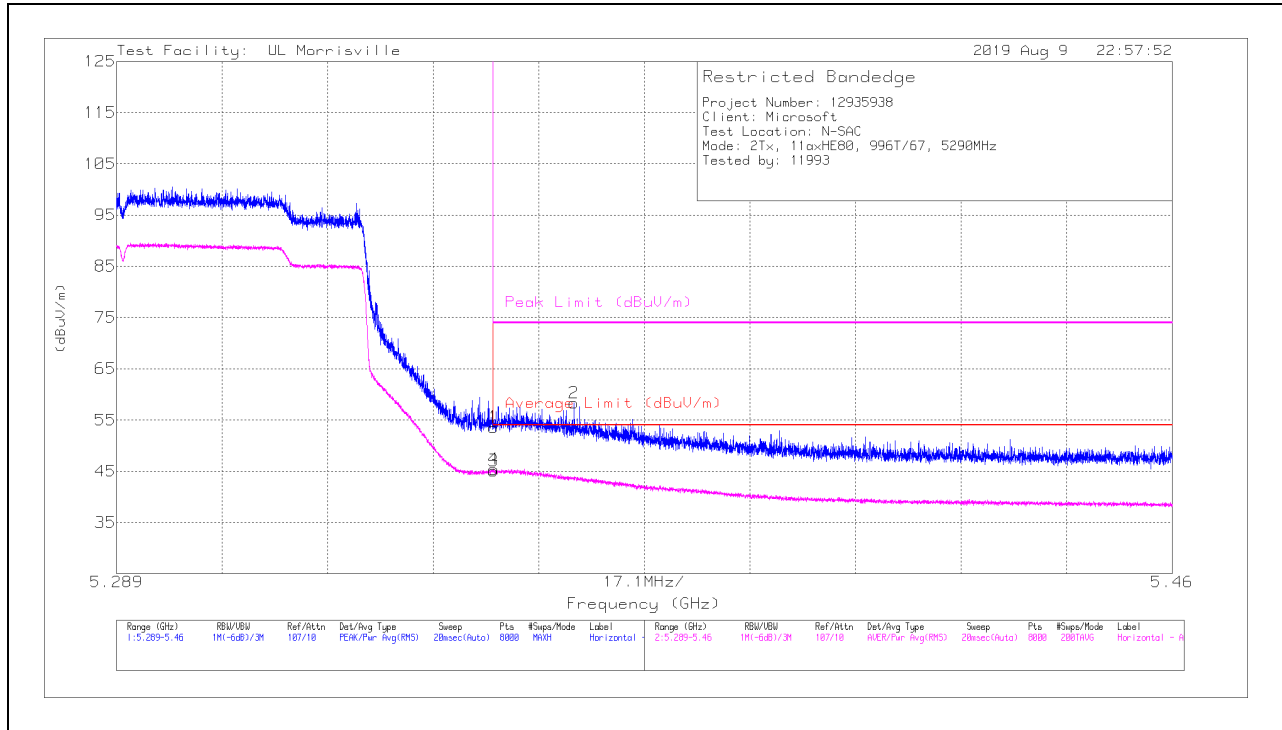

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	42.19	Pk	34.4	-23	53.59	-	-	74	-20.41	340	366	H
2	* ** 5.36305	47.05	Pk	34.4	-23.1	58.35	-	-	74	-15.65	340	366	H
3	* ** 5.35001	33.69	RMS	34.4	-23	45.09	54	-8.91	-	-	340	366	H
4	* ** 5.3501	33.98	RMS	34.4	-23	45.38	54	-8.62	-	-	340	366	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

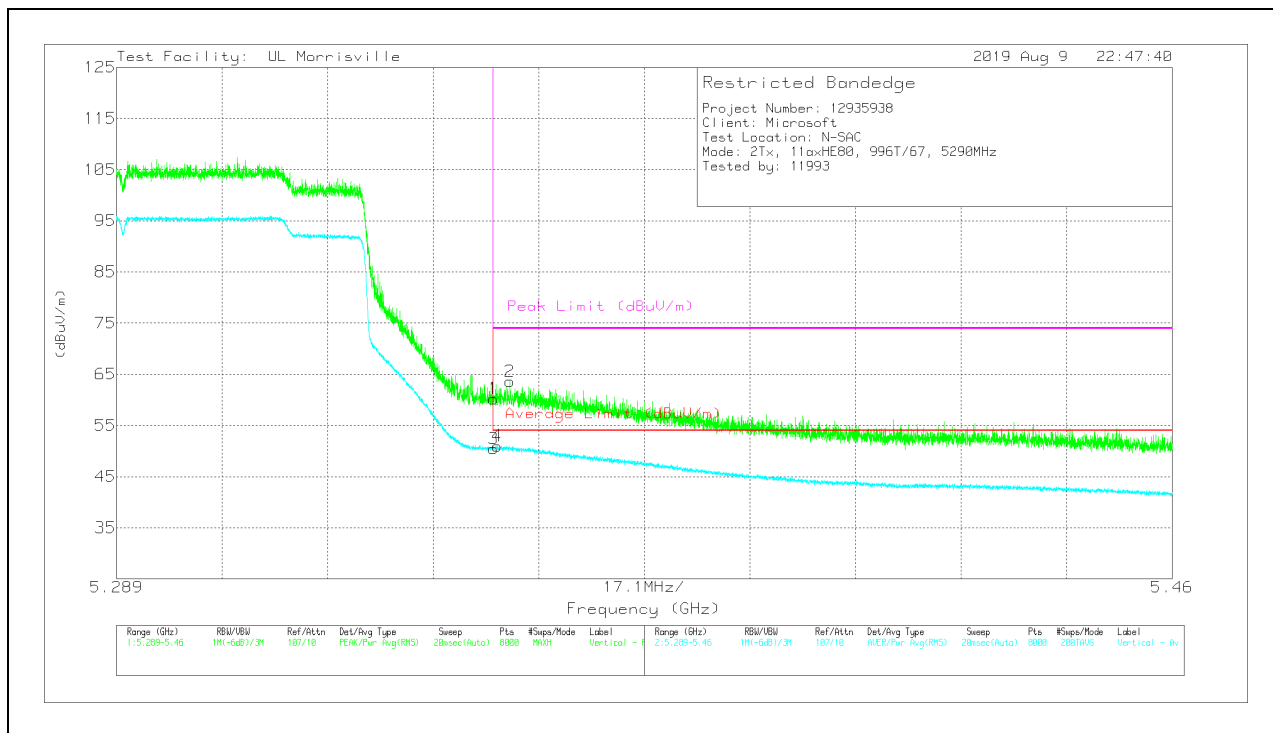

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	48.82	Pk	34.4	-23	60.22	-	-	74	-13.78	301	262	V
2	* ** 5.35273	52.34	Pk	34.4	-23.1	63.64	-	-	74	-10.36	301	262	V
3	* ** 5.35001	39.07	RMS	34.4	-23	50.47	54	-3.53	-	-	301	262	V
4	* ** 5.35065	39.6	RMS	34.4	-23	51	54	-3	-	-	301	262	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 66**

**BANDEDGE (MID CHANNEL)**


**HORIZONTAL RESULT**

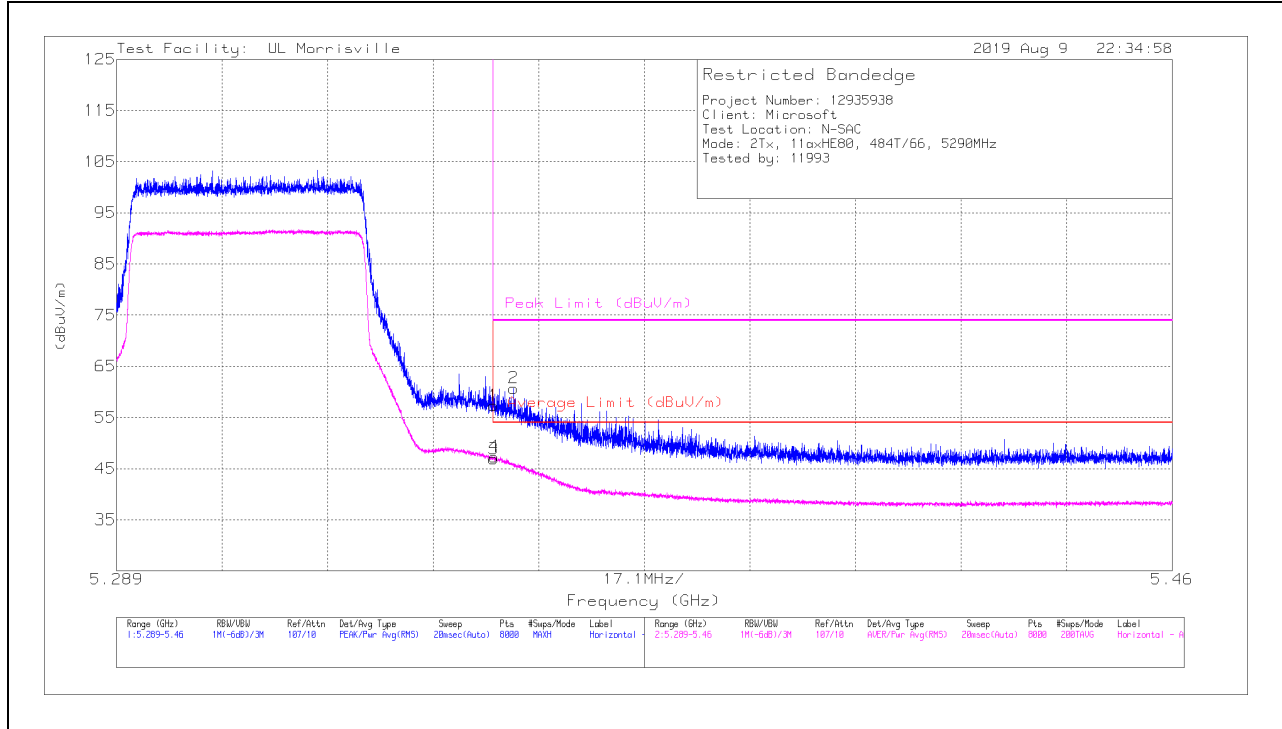

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.96	Pk	34.4	-23	57.36	-	-	74	-16.64	341	246	H
2	* ** 5.35335	49.43	Pk	34.4	-23.1	60.73	-	-	74	-13.27	341	246	H
3	* ** 5.35001	35.5	RMS	34.4	-23	46.9	54	-7.1	-	-	341	246	H
4	* ** 5.35012	35.92	RMS	34.4	-23	47.32	54	-6.68	-	-	341	246	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

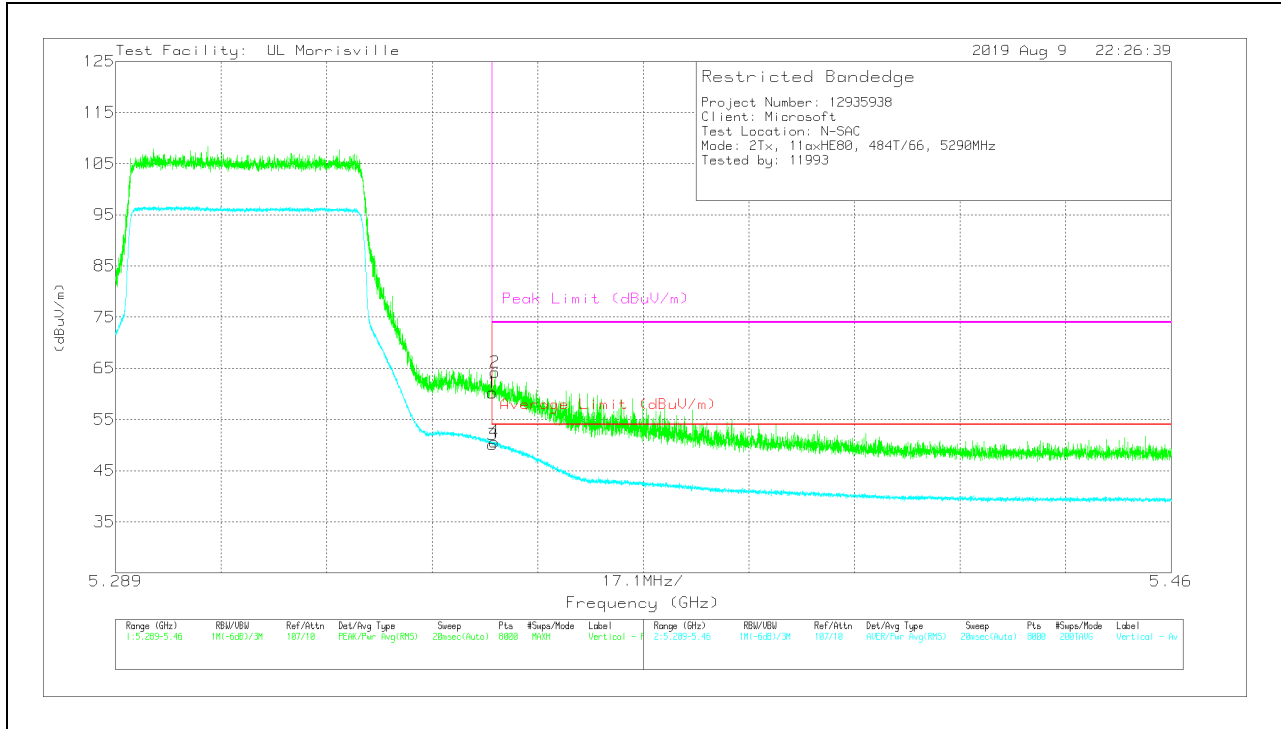


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	48.85	Pk	34.4	-23	60.25	-	-	74	-13.75	349	245	V
2	* ** 5.35042	52.8	Pk	34.4	-23	64.2	-	-	74	-9.8	349	245	V
3	* ** 5.35001	38.71	RMS	34.4	-23	50.11	54	-3.89	-	-	349	245	V
4	* ** 5.35033	39.22	RMS	34.4	-23	50.62	54	-3.38	-	-	349	245	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 64**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

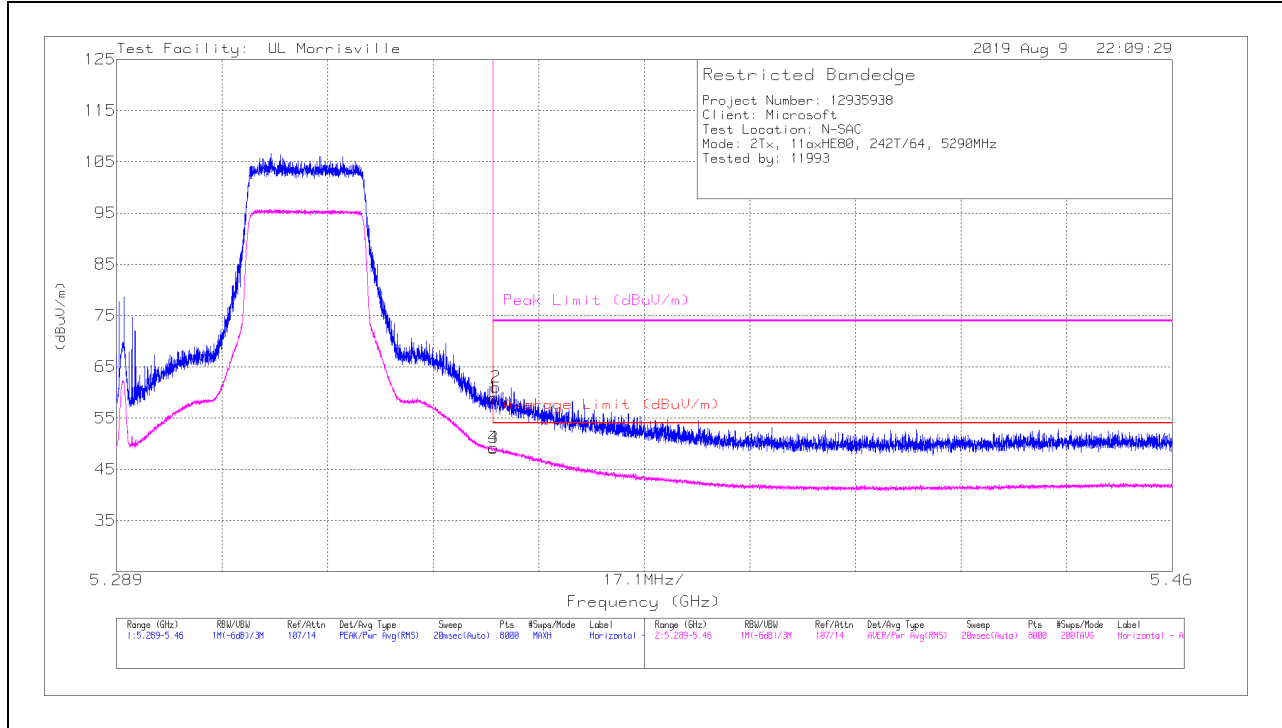

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	47.52	Pk	34.4	-23	58.92	-	-	74	-15.08	340	354	H
2	*** 5.35046	49.64	Pk	34.4	-23	61.04	-	-	74	-12.96	340	354	H
3	*** 5.35001	37.79	RMS	34.4	-23	49.19	54	-4.81	-	-	340	354	H
4	*** 5.35008	37.86	RMS	34.4	-23	49.26	54	-4.74	-	-	340	354	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

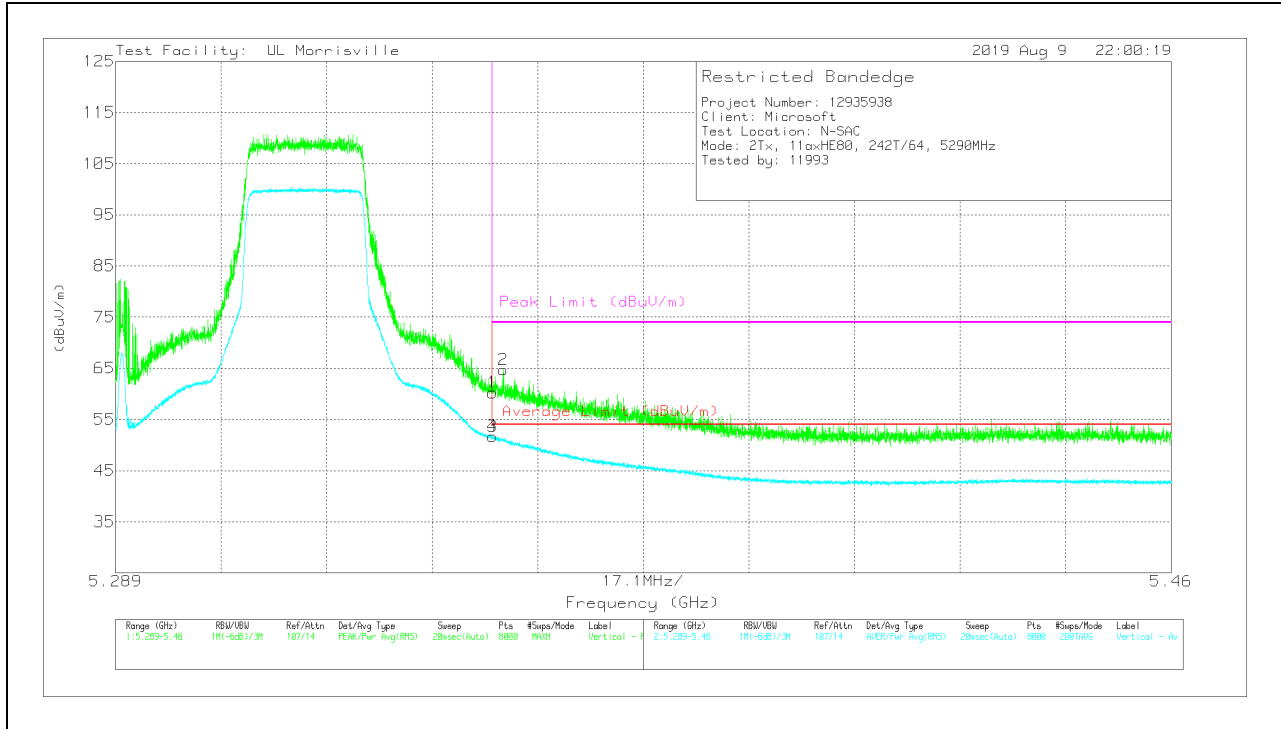


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	48.85	Pk	34.4	-23	60.25	-	-	74	-13.75	350	248	V
2	* ** 5.35174	53.34	Pk	34.4	-23	64.74	-	-	74	-9.26	350	248	V
3	* ** 5.35001	40.28	RMS	34.4	-23	51.68	54	-2.32	-	-	350	248	V
4	* ** 5.35003	40.31	RMS	34.4	-23	51.71	54	-2.29	-	-	350	248	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 60**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

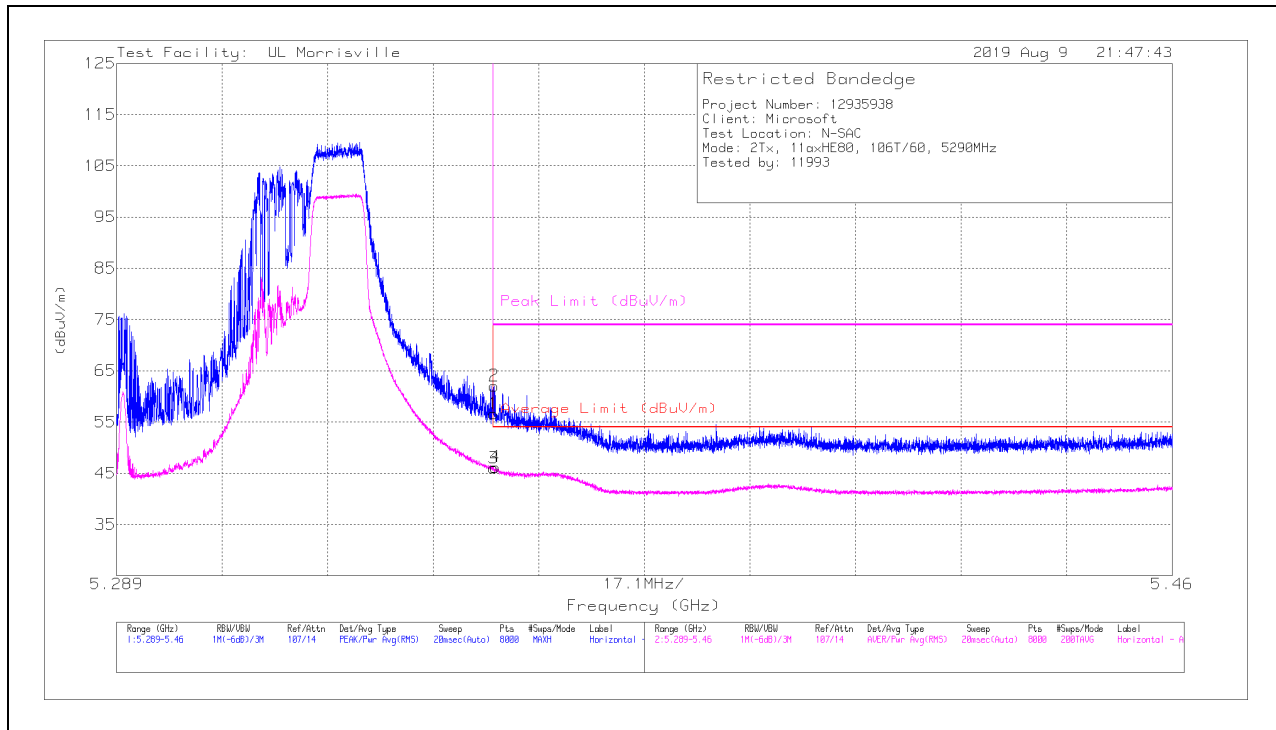

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* * * 5.35001	45.21	Pk	34.4	-23	56.61	-	-	74	-17.39	336	373	H
2	* * * 5.35018	50.67	Pk	34.4	-23	62.07	-	-	74	-11.93	336	373	H
3	* * * 5.35001	34.65	RMS	34.4	-23	46.05	54	-7.95	-	-	336	373	H
4	* * * 5.35036	34.83	RMS	34.4	-23	46.23	54	-7.77	-	-	336	373	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

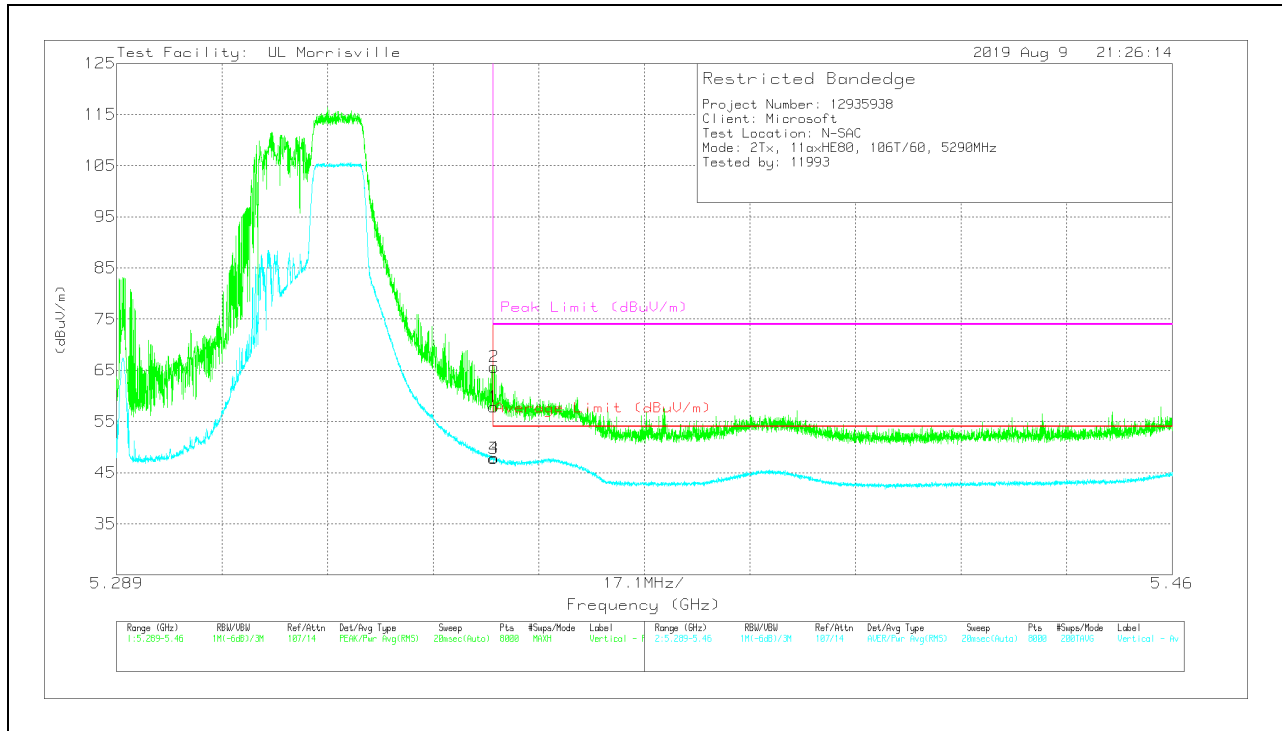


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	46.44	Pk	34.4	-23	57.84	-	-	74	-16.16	311	258	V
2	* ** 5.35018	54.26	Pk	34.4	-23	65.66	-	-	74	-8.34	311	258	V
3	* ** 5.35001	36.39	RMS	34.4	-23	47.79	54	-6.21	-	-	311	258	V
4	* ** 5.35016	36.45	RMS	34.4	-23	47.85	54	-6.15	-	-	311	258	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 52**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

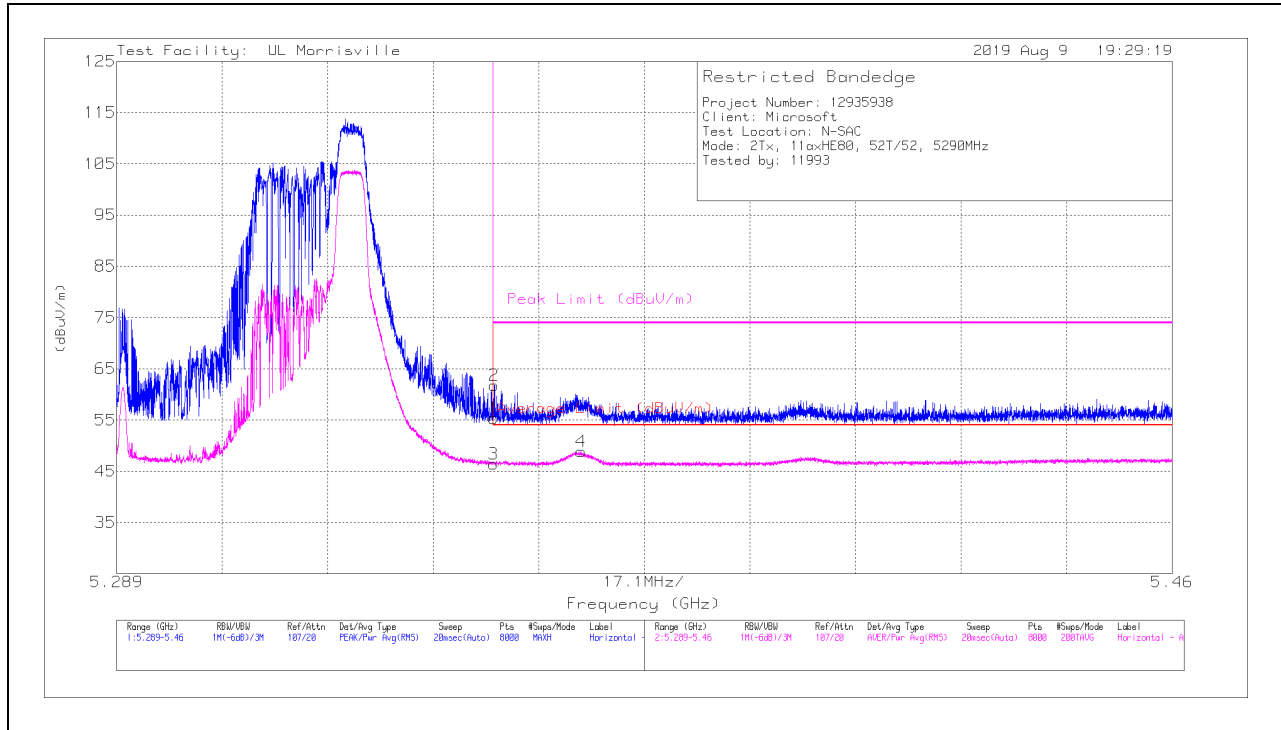

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.94	Pk	34.4	-23	55.34	-	-	74	-18.66	345	274	H
2	* ** 5.35012	50.36	Pk	34.4	-23	61.76	-	-	74	-12.24	345	274	H
3	* ** 5.35001	35.04	RMS	34.4	-23	46.44	54	-7.56	-	-	345	274	H
4	* ** 5.36425	37.54	RMS	34.4	-23.1	48.84	54	-5.16	-	-	345	274	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

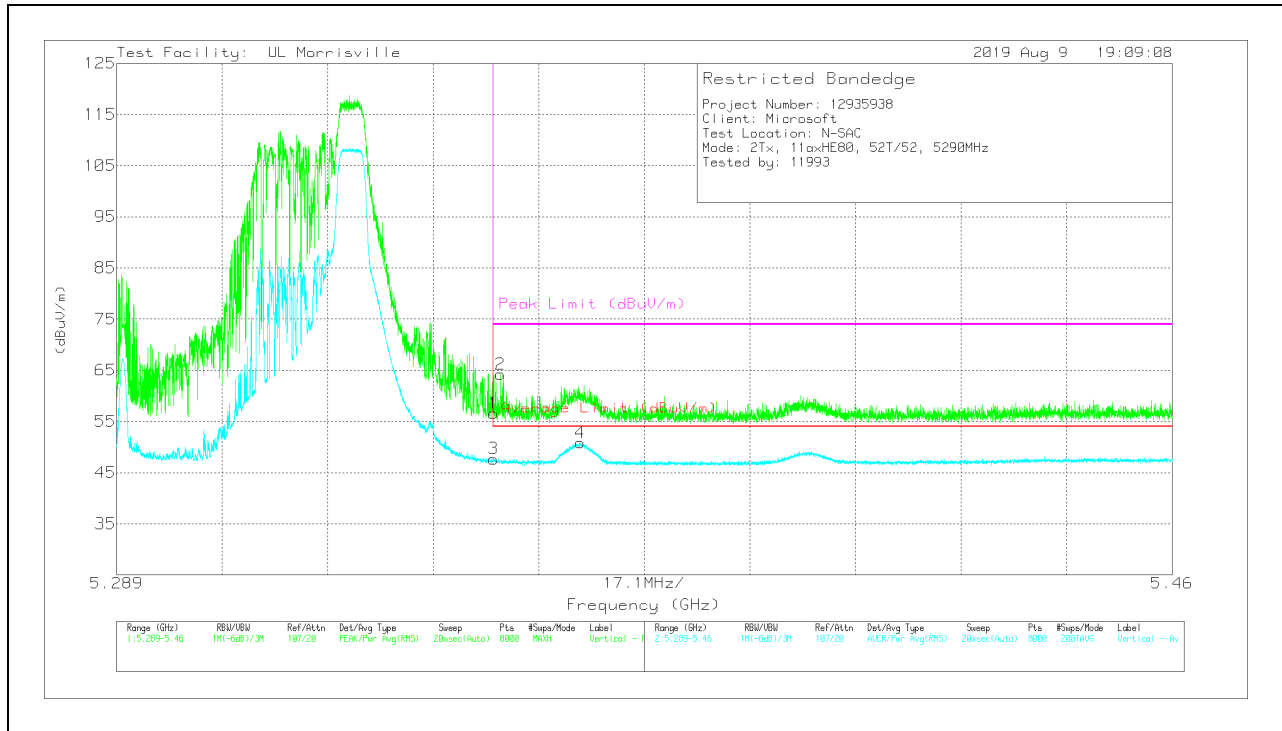

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.19	Pk	34.4	-23	56.59	-	-	74	-17.41	351	244	V
2	* ** 5.35119	52.83	Pk	34.4	-23	64.23	-	-	74	-9.77	351	244	V
3	* ** 5.35001	36.3	RMS	34.4	-23	47.7	54	-6.3	-	-	351	244	V
4	* ** 5.36408	39.53	RMS	34.4	-23.1	50.83	54	-3.17	-	-	351	244	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 36**

**BANDEDGE (MID CHANNEL)**

**HORIZONTAL RESULT**

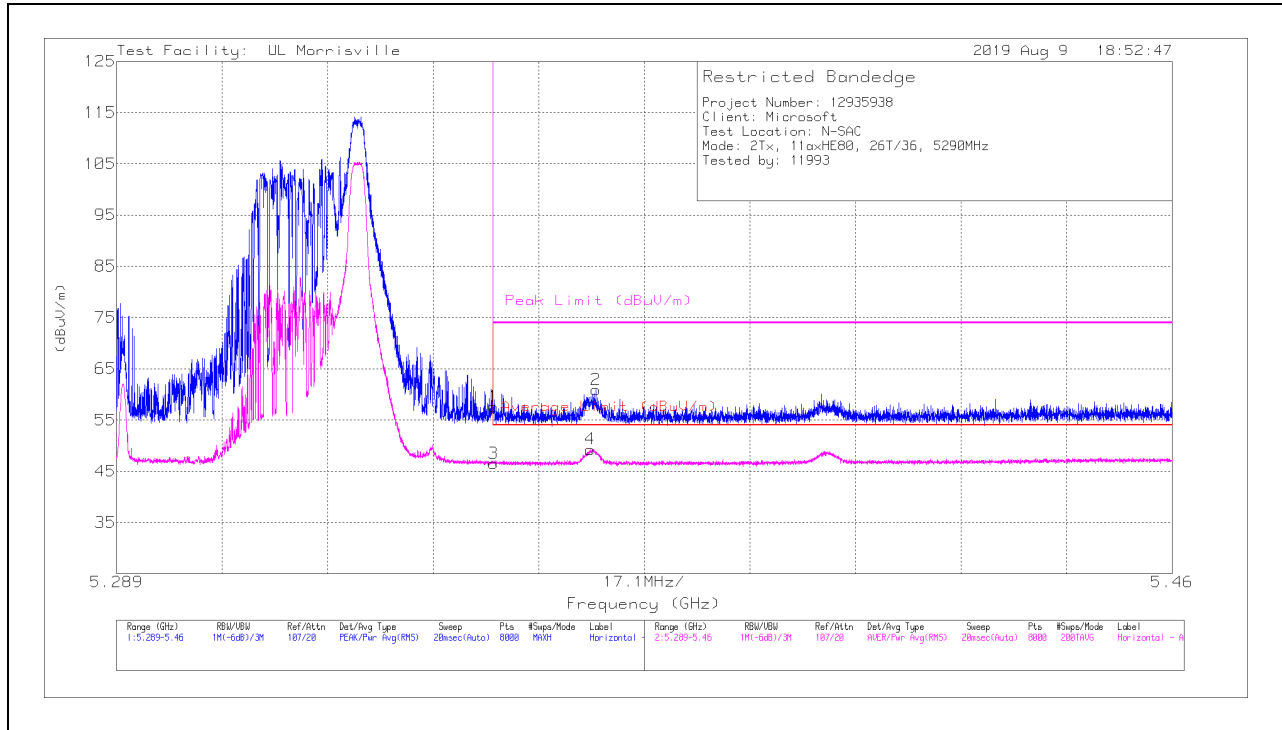

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	46.22	Pk	34.4	-23	57.62	-	-	74	-16.38	38	353	H
2	* ** 5.36662	49.49	Pk	34.4	-23	60.89	-	-	74	-13.11	38	353	H
3	* ** 5.35001	35.12	RMS	34.4	-23	46.52	54	-7.48	-	-	38	353	H
4	* ** 5.36577	37.9	RMS	34.4	-23	49.3	54	-4.7	-	-	38	353	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

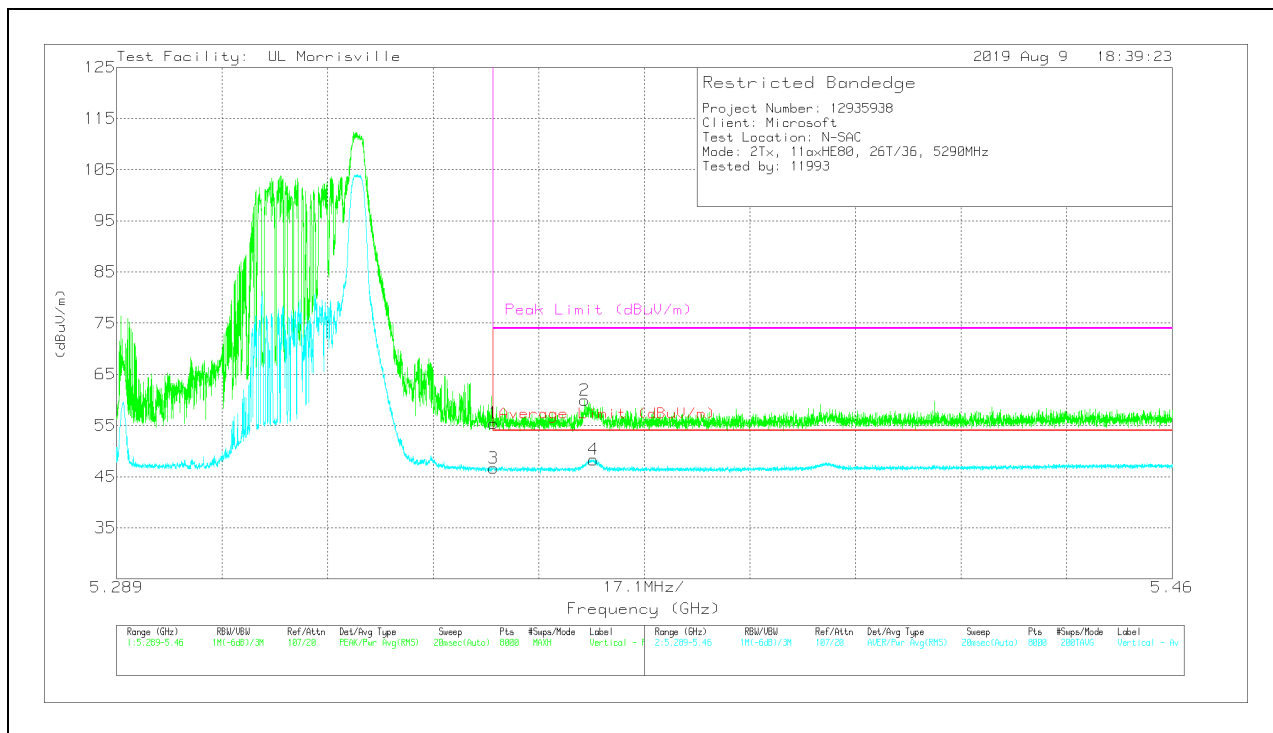

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	44.02	Pk	34.4	-23	55.42	-	-	74	-18.58	262	97	V
2	* ** 5.36481	48.49	Pk	34.4	-23	59.89	-	-	74	-14.11	262	97	V
3	* ** 5.35001	35.26	RMS	34.4	-23	46.66	54	-7.34	-	-	262	97	V
4	* ** 5.36624	36.92	RMS	34.4	-23	48.32	54	-5.68	-	-	262	97	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.1.7. TX ABOVE 1 GHz 802.11ax HE160 MODE IN THE 5.2 & 5.3 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – SU MODE

#### BANDEDGE (MID CHANNEL LOW EDGE)

#### HORIZONTAL RESULT

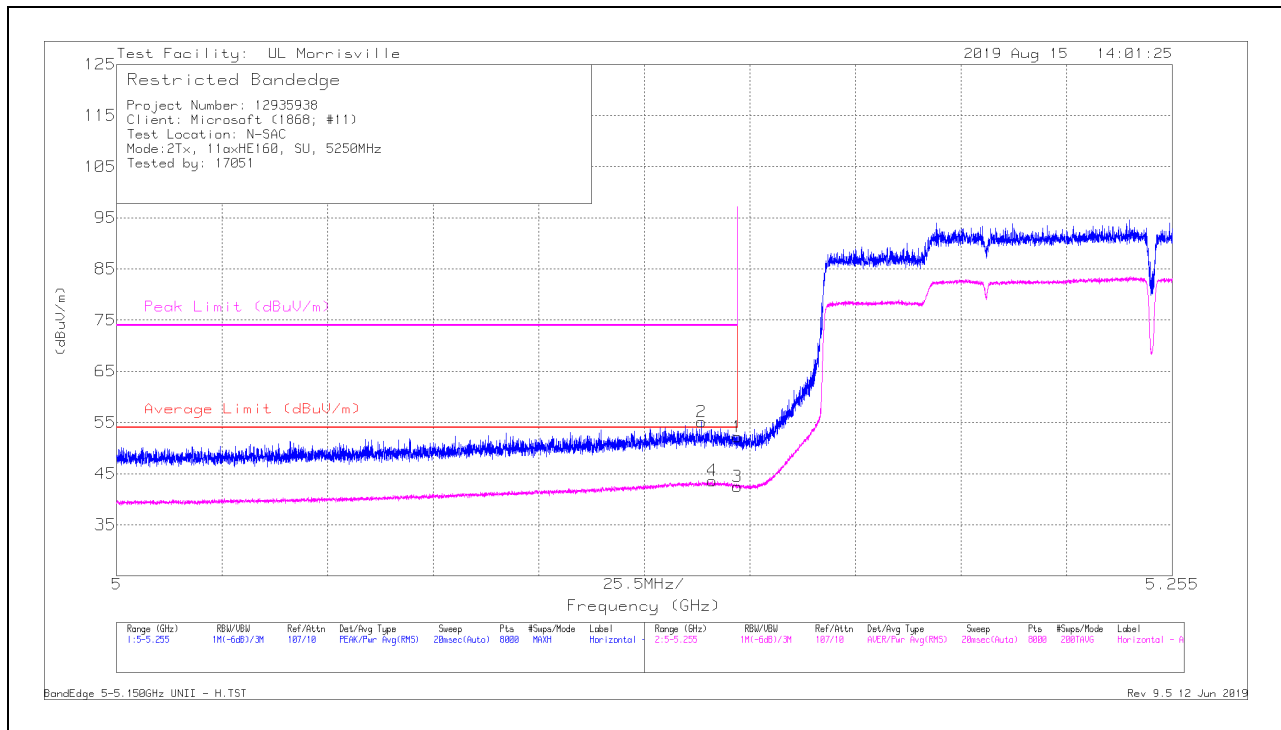

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	40.68	Pk	34.1	-22.6	52.18	-	-	74	-21.82	337	385	H
2	*** 5.14132	43.63	Pk	34.1	-22.6	55.13	-	-	74	-18.87	337	385	H
3	*** 5.14999	30.98	RMS	34.1	-22.6	42.48	54	-11.52	-	-	337	385	H
4	*** 5.14387	32.03	RMS	34.1	-22.5	43.63	54	-10.37	-	-	337	385	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

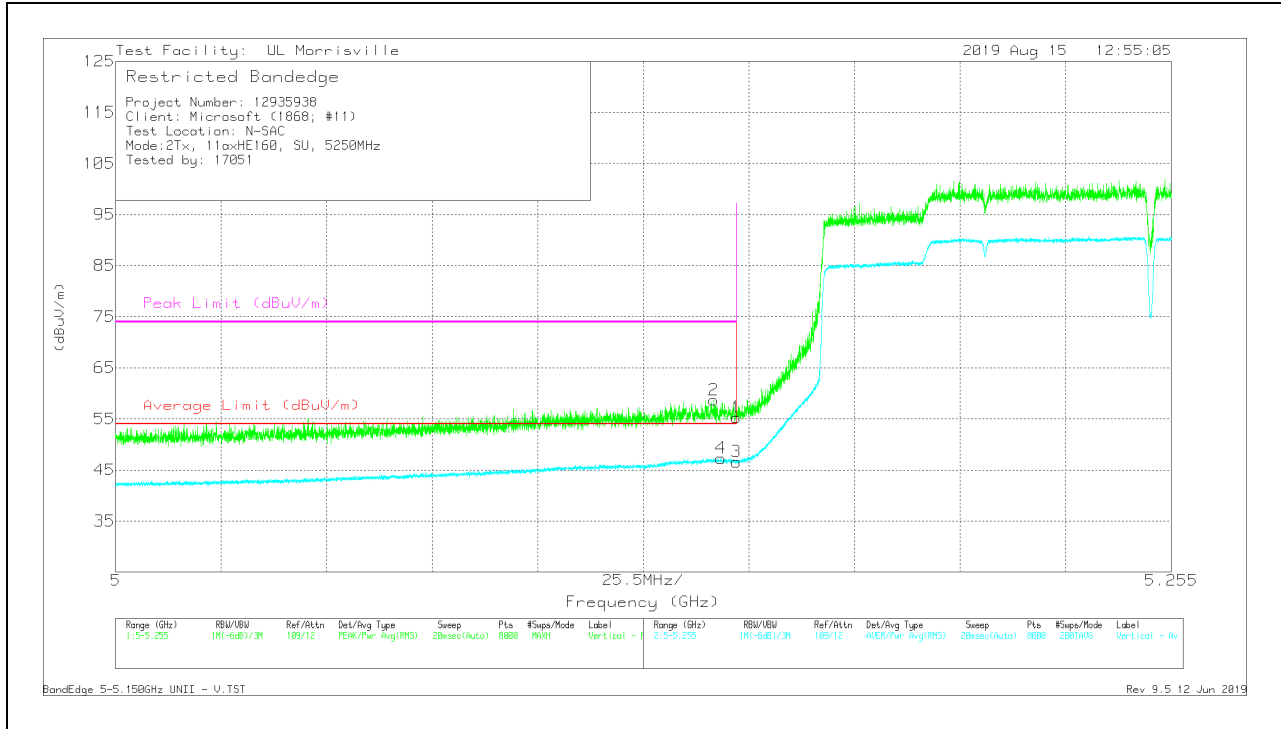


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	43.79	Pk	34.1	-22.6	55.29	-	-	74	-18.71	307	268	V
2	* ** 5.14444	47.06	Pk	34.1	-22.5	58.66	-	-	74	-15.34	307	268	V
3	* ** 5.14999	35.11	RMS	34.1	-22.6	46.61	54	-7.39	-	-	307	268	V
4	* ** 5.14623	35.82	RMS	34.1	-22.6	47.32	54	-6.68	-	-	307	268	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**BANDEDGE (MID CHANNEL HIGH EDGE)**


**HORIZONTAL RESULT**

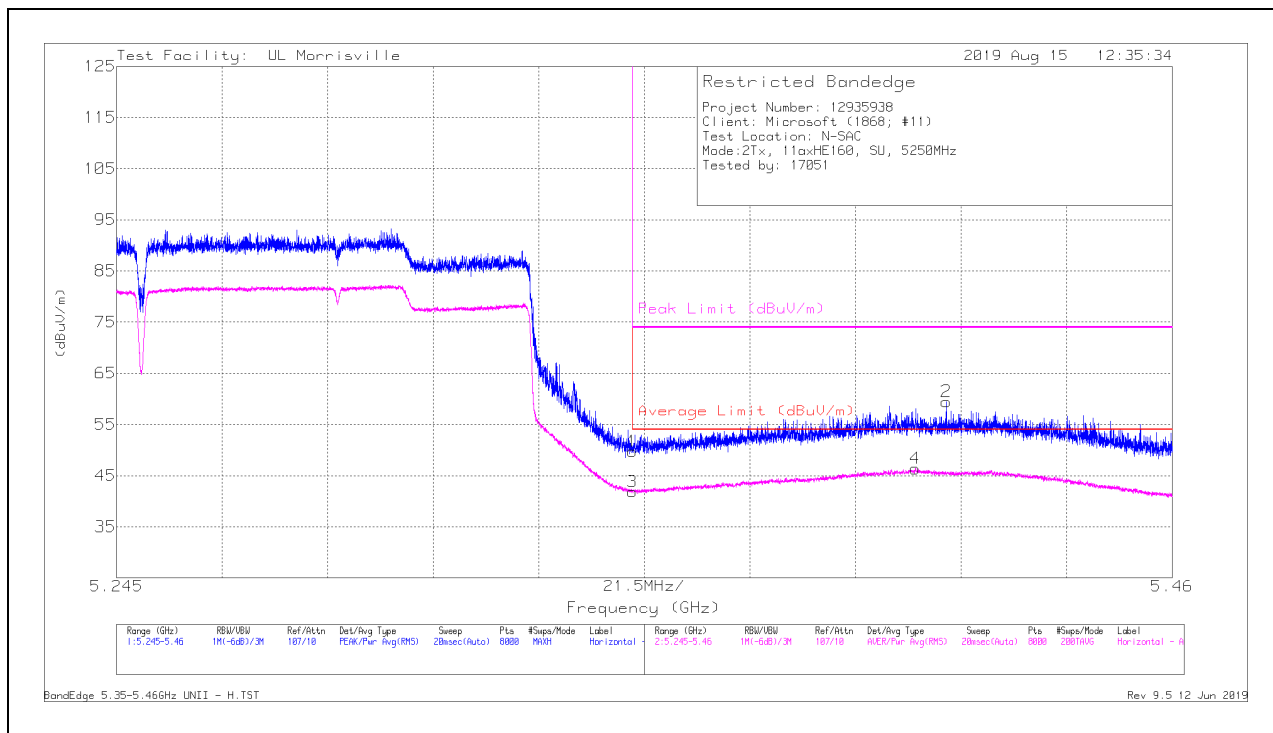

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	38.35	Pk	34.4	-23	49.75	-	-	74	-24.25	34	331	H
2	* ** 5.41398	48.08	Pk	34.4	-23	59.48	-	-	74	-14.52	34	331	H
3	* ** 5.35001	30.49	RMS	34.4	-23	41.89	54	-12.11	-	-	34	331	H
4	* ** 5.40769	34.96	RMS	34.4	-23	46.36	54	-7.64	-	-	34	331	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

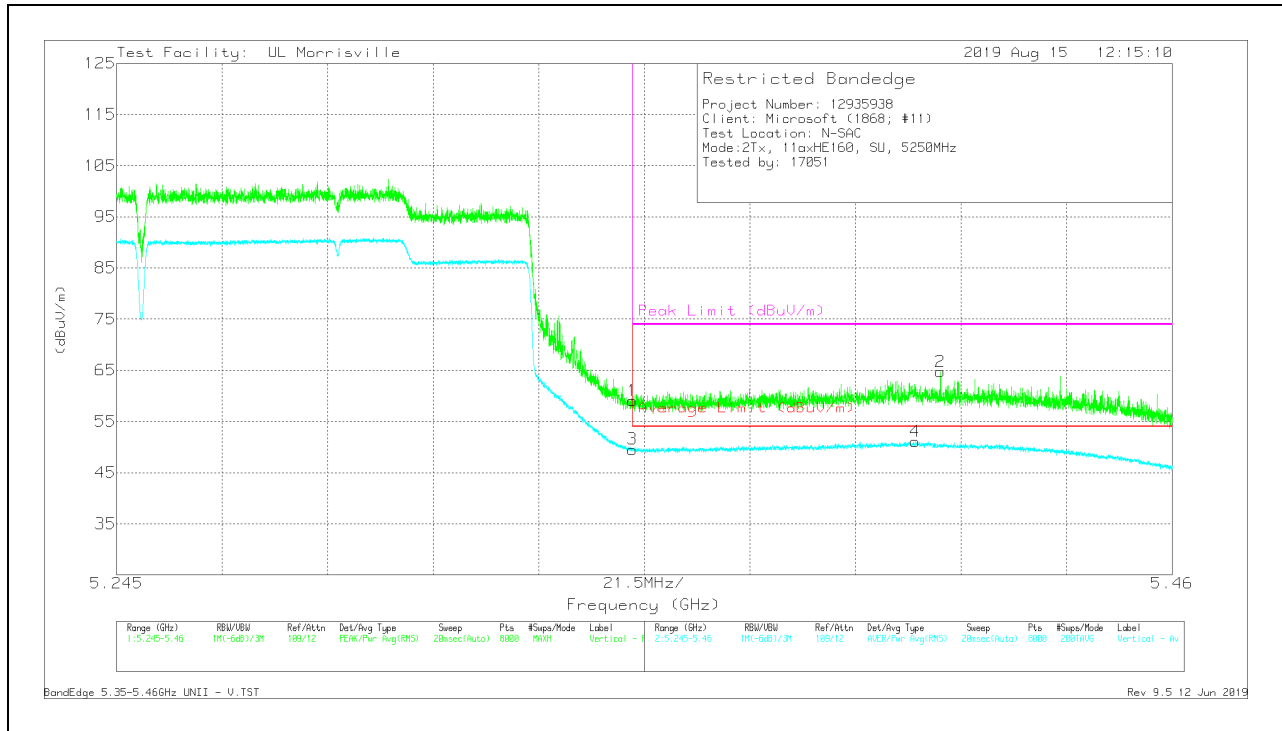


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	47.67	Pk	34.4	-23	59.07	-	-	74	-14.93	302	277	V
2	* ** 5.41277	53.34	Pk	34.4	-23	64.74	-	-	74	-9.26	302	277	V
3	* ** 5.35001	38.14	RMS	34.4	-23	49.54	54	-4.46	-	-	302	277	V
4	* ** 5.40761	39.7	RMS	34.4	-23	51.1	54	-2.9	-	-	302	277	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 2x996-Tones, RU Index 68**

**BANDEDGE (MID CHANNEL LOW EDGE)**

**HORIZONTAL RESULT**

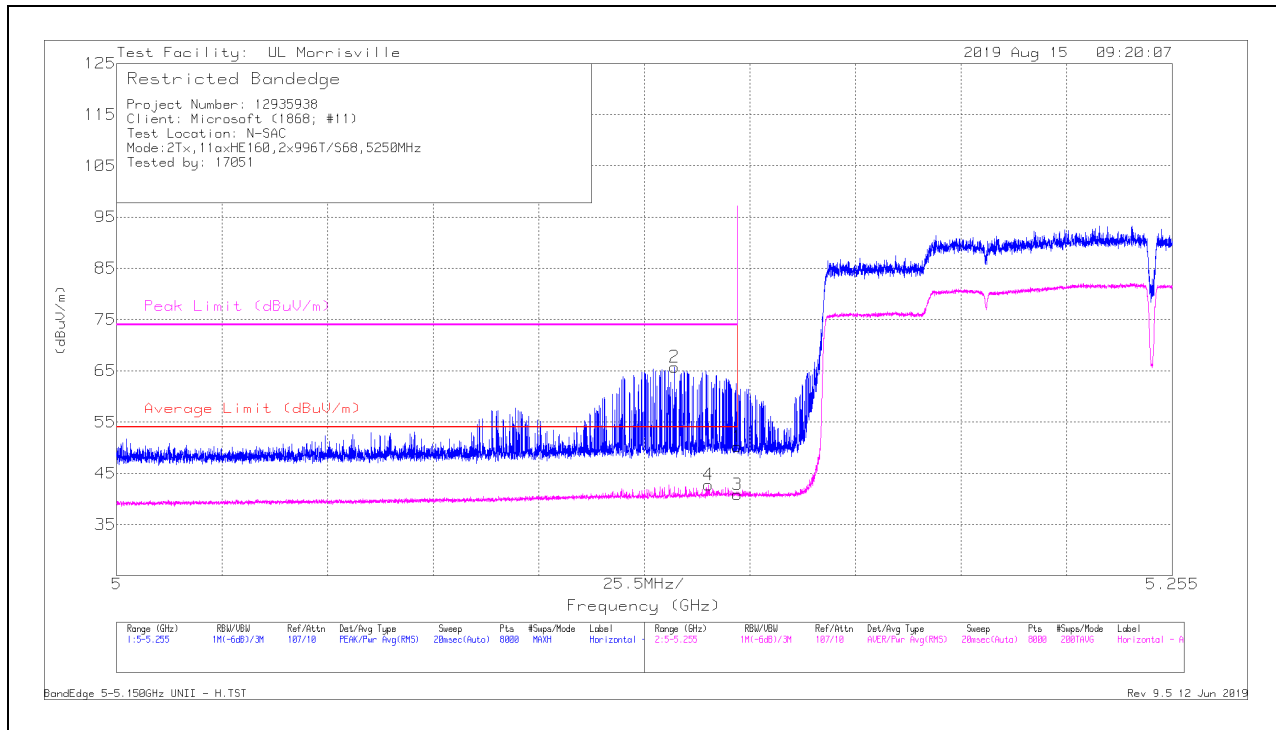

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	38.7	Pk	34.1	-22.6	50.2	-	-	74	-23.8	321	389	H
2	* ** 5.13472	54.35	Pk	34.1	-22.7	65.75	-	-	74	-8.25	321	389	H
3	* ** 5.14999	29.38	RMS	34.1	-22.6	40.88	54	-13.12	-	-	321	389	H
4	* ** 5.14298	31.16	RMS	34.1	-22.5	42.76	54	-11.24	-	-	321	389	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

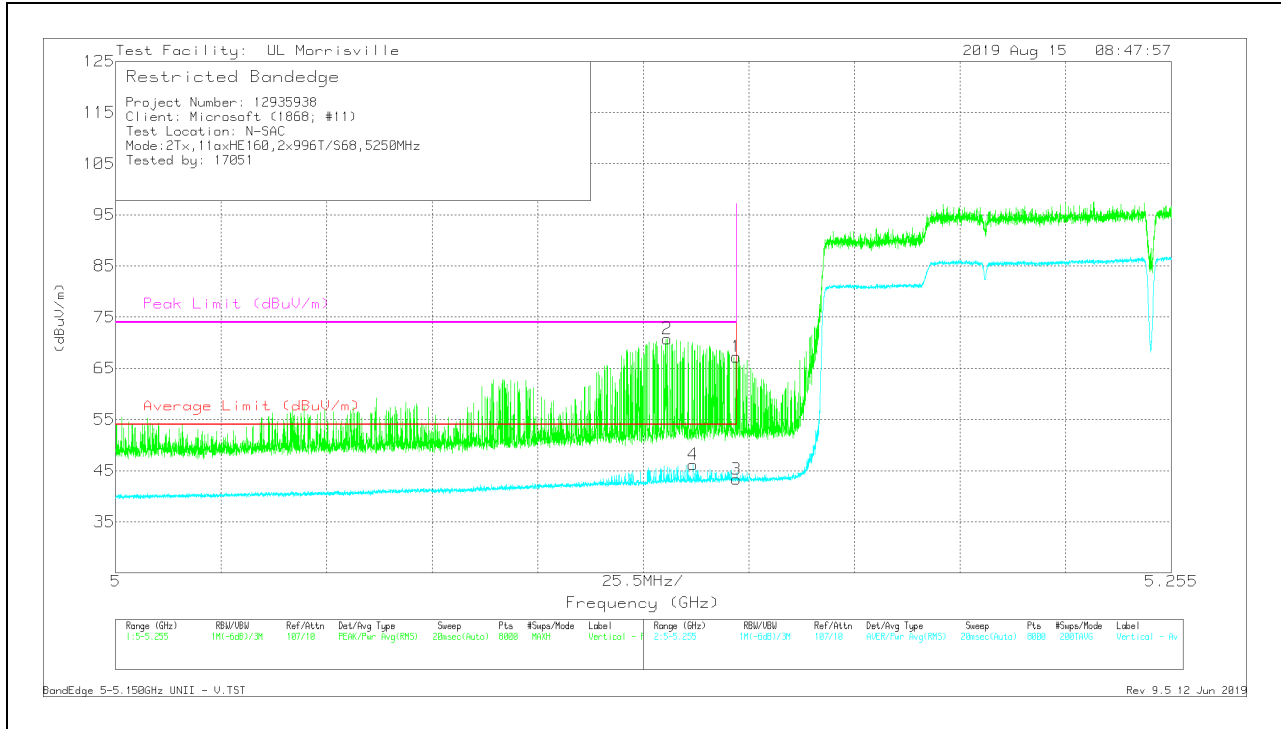

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	55.75	Pk	34.1	-22.6	67.25	-	-	74	-6.75	339	285	V
2	* ** 5.13325	59.38	Pk	34.1	-22.7	70.78	-	-	74	-3.22	339	285	V
3	* ** 5.14999	31.82	RMS	34.1	-22.6	43.32	54	-10.68	-	-	339	285	V
4	* ** 5.1395	34.7	RMS	34.1	-22.6	46.2	54	-7.8	-	-	339	285	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection



**BANDEDGE (MID CHANNEL HIGH EDGE)**


**HORIZONTAL RESULT**

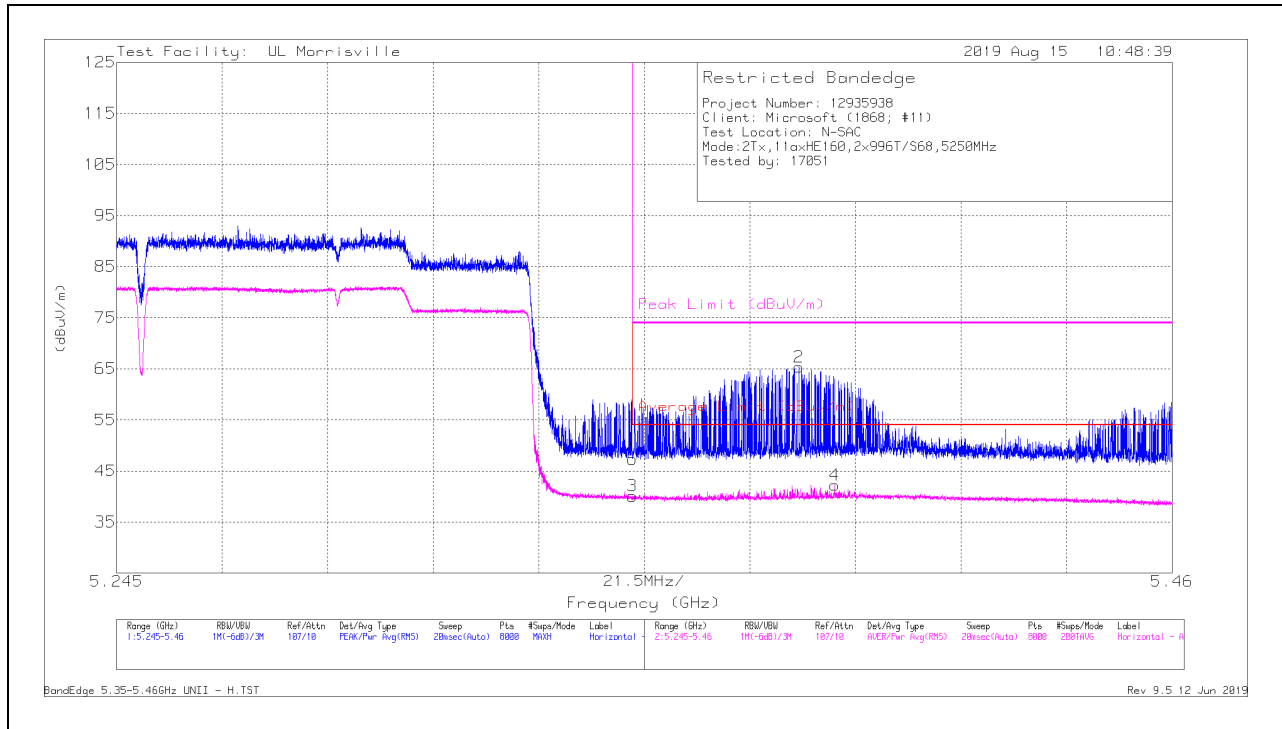

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	35.95	Pk	34.4	-23	47.35	-	-	74	-26.65	318	350	H
2	* ** 5.38396	53.93	Pk	34.4	-23	65.33	-	-	74	-8.67	318	350	H
3	* ** 5.35001	28.69	RMS	34.4	-23	40.09	54	-13.91	-	-	318	350	H
4	* ** 5.39124	30.84	RMS	34.4	-23	42.24	54	-11.76	-	-	318	350	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

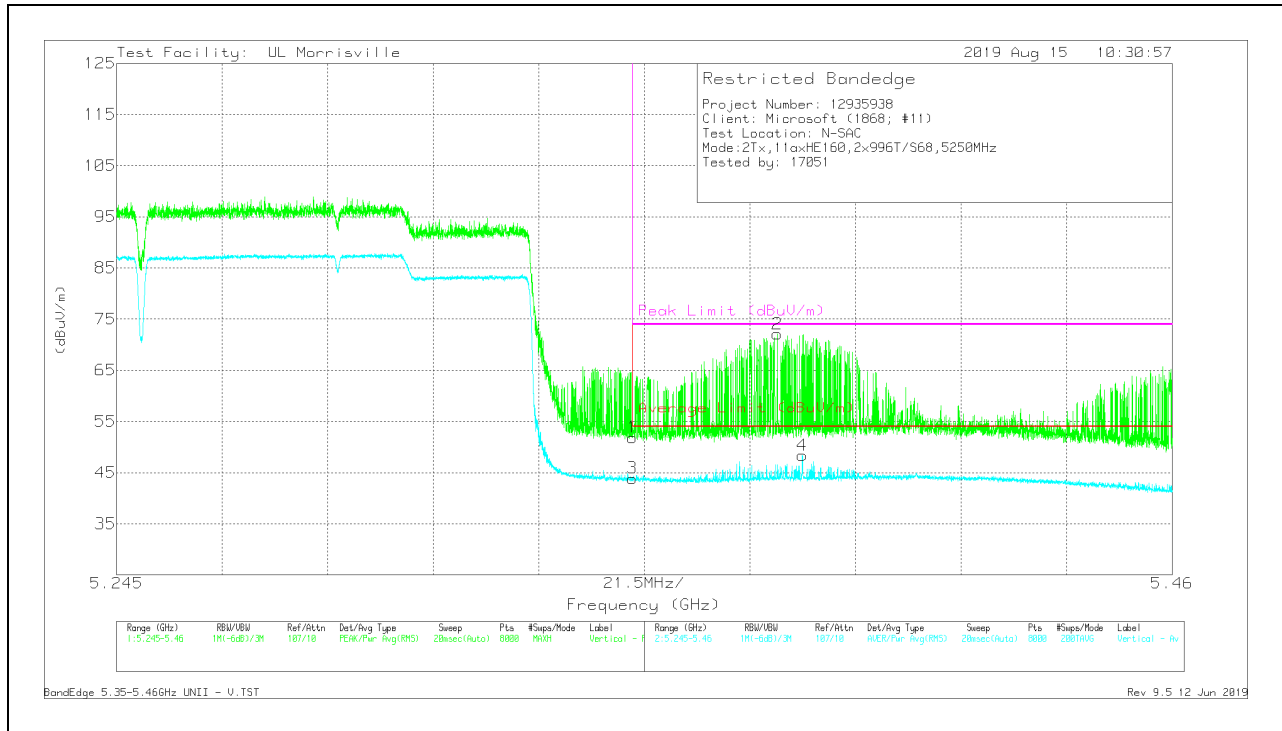

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.48	Pk	34.4	-23	51.88	-	-	74	-22.12	302	275	V
2	* ** 5.37955	60.67	Pk	34.4	-23	72.07	-	-	74	-1.93	302	275	V
3	* ** 5.35001	32.49	RMS	34.4	-23	43.89	54	-10.11	-	-	302	275	V
4	* ** 5.38466	37.04	RMS	34.4	-23.1	48.34	54	-5.66	-	-	302	275	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index 67**

**BANDEDGE (MID CHANNEL LOW EDGE)**


**HORIZONTAL RESULT**

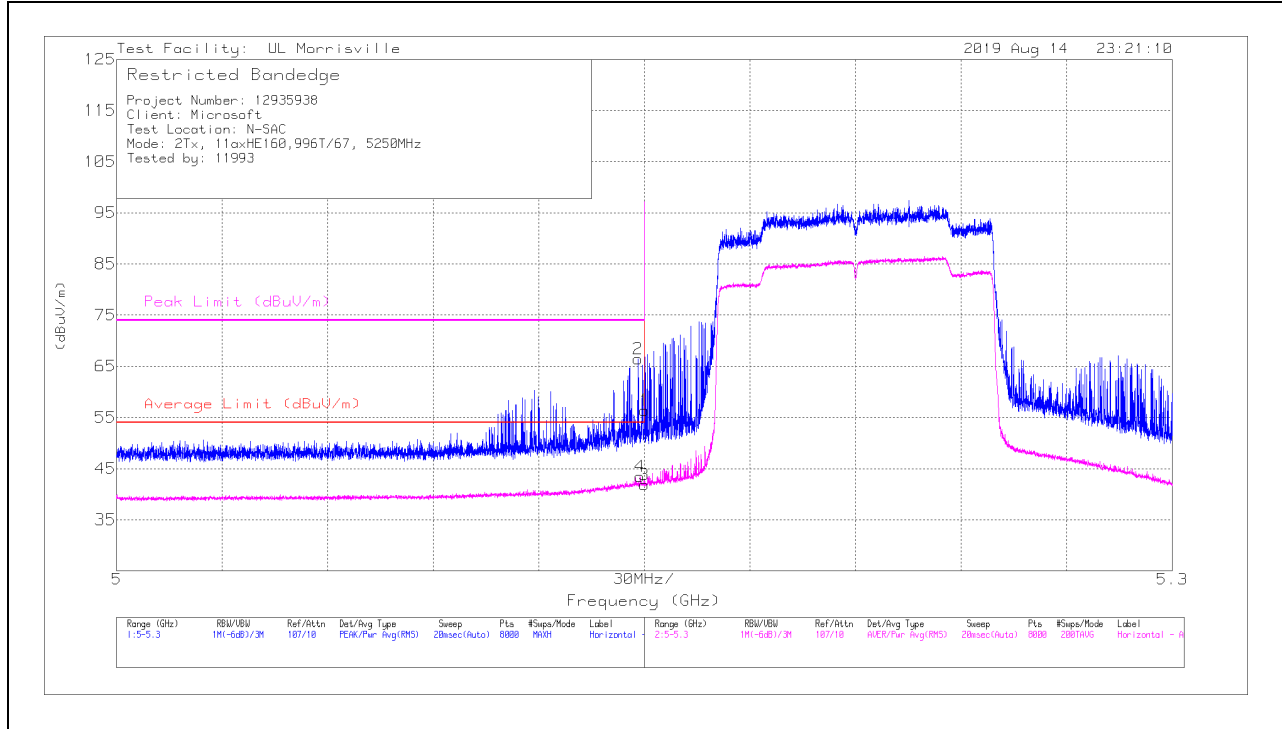

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	44.9	Pk	34.1	-22.6	56.4	-	-	74	-17.6	316	367	H
2	** * 5.14826	54.96	Pk	34.1	-22.6	66.46	-	-	74	-7.54	316	367	H
3	** * 5.14998	30.39	RMS	34.1	-22.6	41.89	54	-12.11	-	-	316	367	H
4	** * 5.14871	31.98	RMS	34.1	-22.6	43.48	54	-10.52	-	-	316	367	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

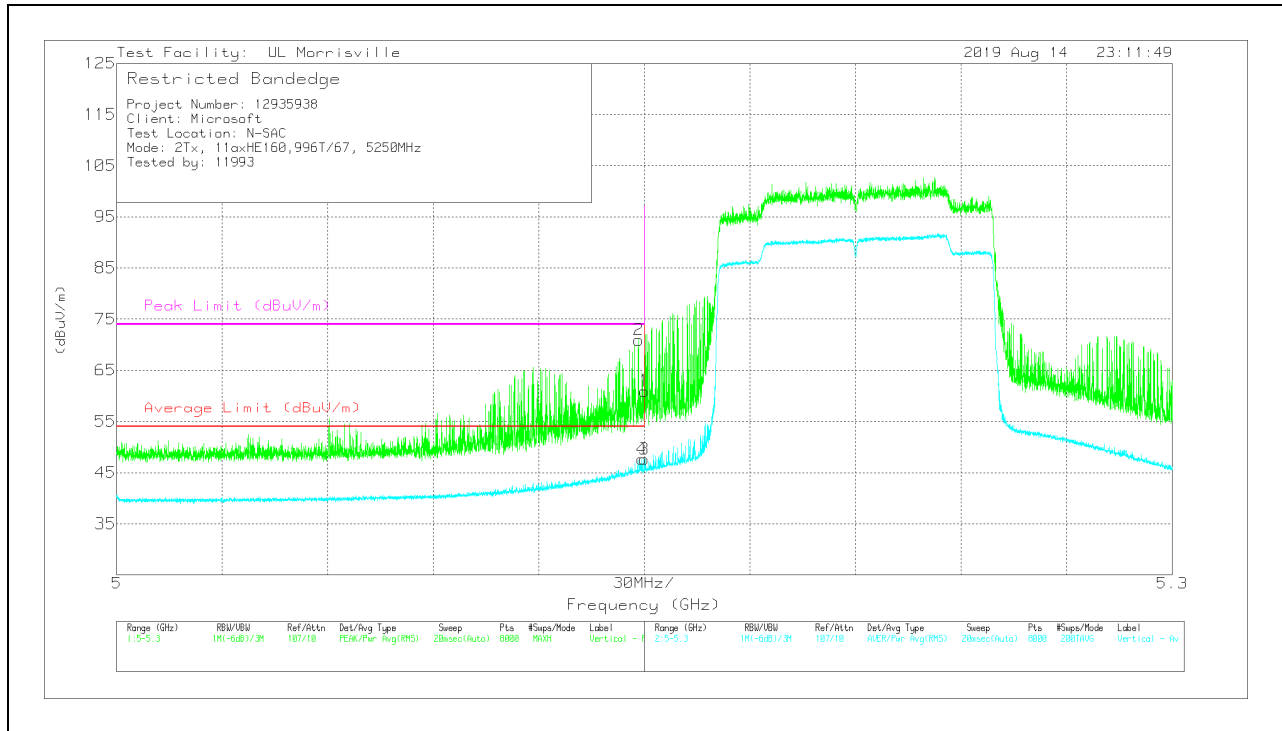


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	49.46	Pk	34.1	-22.6	60.96	-	-	74	-13.04	338	295	V
2	* ** 5.1483	59.44	Pk	34.1	-22.6	70.94	-	-	74	-3.06	338	295	V
3	* ** 5.14998	36.15	RMS	34.1	-22.6	47.65	54	-6.35	-	-	338	295	V
4	* ** 5.1492	36.13	RMS	34.1	-22.6	47.63	54	-6.37	-	-	338	295	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index S67**

**BANDEDGE (MID CHANNEL HIGH EDGE)**

**HORIZONTAL RESULT**

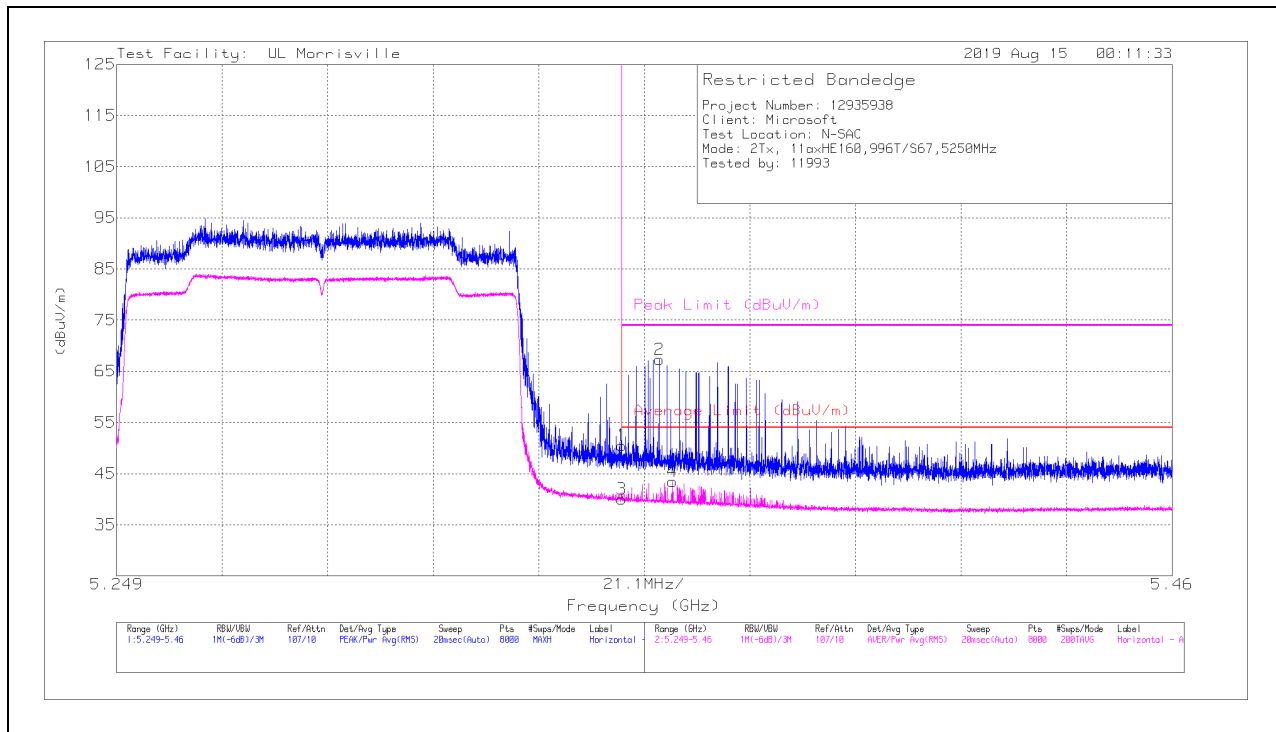

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35	39.11	Pk	34.4	-23	50.51	-	-	74	-23.49	346	349	H
2	* ** 5.35749	56	Pk	34.4	-23.1	67.3	-	-	74	-6.7	346	349	H
3	* ** 5.35	28.61	RMS	34.4	-23	40.01	54	-13.99	-	-	346	349	H
4	* ** 5.36018	32.12	RMS	34.4	-23.1	43.42	54	-10.58	-	-	346	349	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

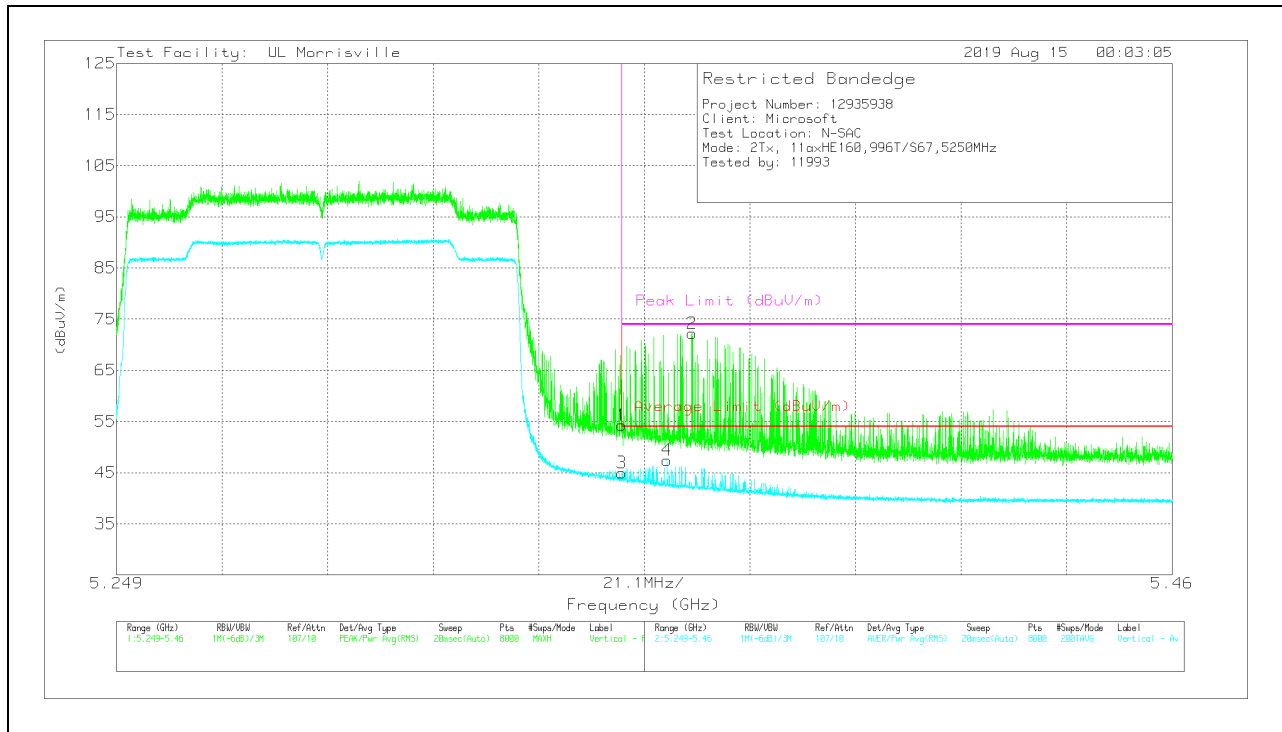

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35	42.87	Pk	34.4	-23	54.27	-	-	74	-19.73	336	275	V
2	** * 5.36401	60.9	Pk	34.4	-23.1	72.2	-	-	74	-1.8	336	275	V
3	*** 5.35	33.57	RMS	34.4	-23	44.97	54	-9.03	-	-	336	275	V
4	** * 5.35902	36.15	RMS	34.4	-23.1	47.45	54	-6.55	-	-	336	275	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65**

**BANDEDGE (MID CHANNEL LOW EDGE)**

**HORIZONTAL RESULT**

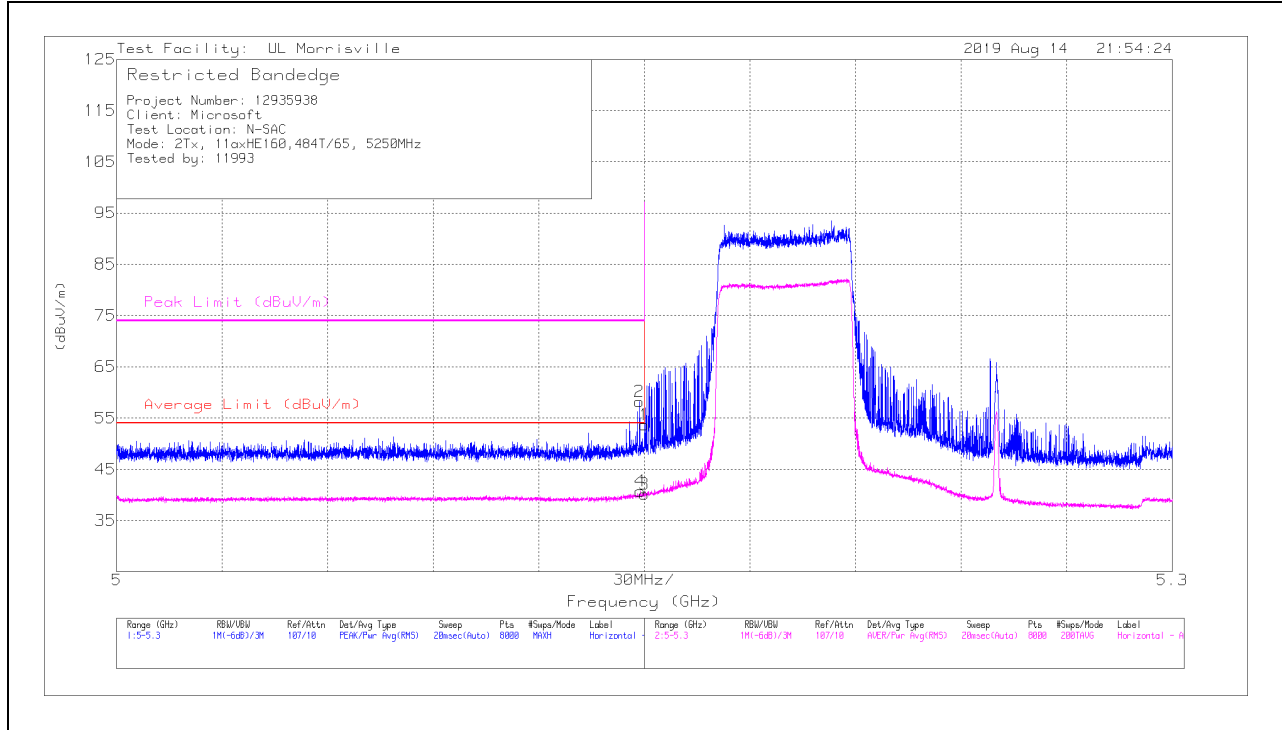

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	42.14	Pk	34.1	-22.6	53.64	-	-	74	-20.36	257	310	H
2	* ** 5.14856	46.72	Pk	34.1	-22.6	58.22	-	-	74	-15.78	257	310	H
3	* ** 5.14998	28.66	RMS	34.1	-22.6	40.16	54	-13.84	-	-	257	310	H
4	* ** 5.14882	29.21	RMS	34.1	-22.6	40.71	54	-13.29	-	-	257	310	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

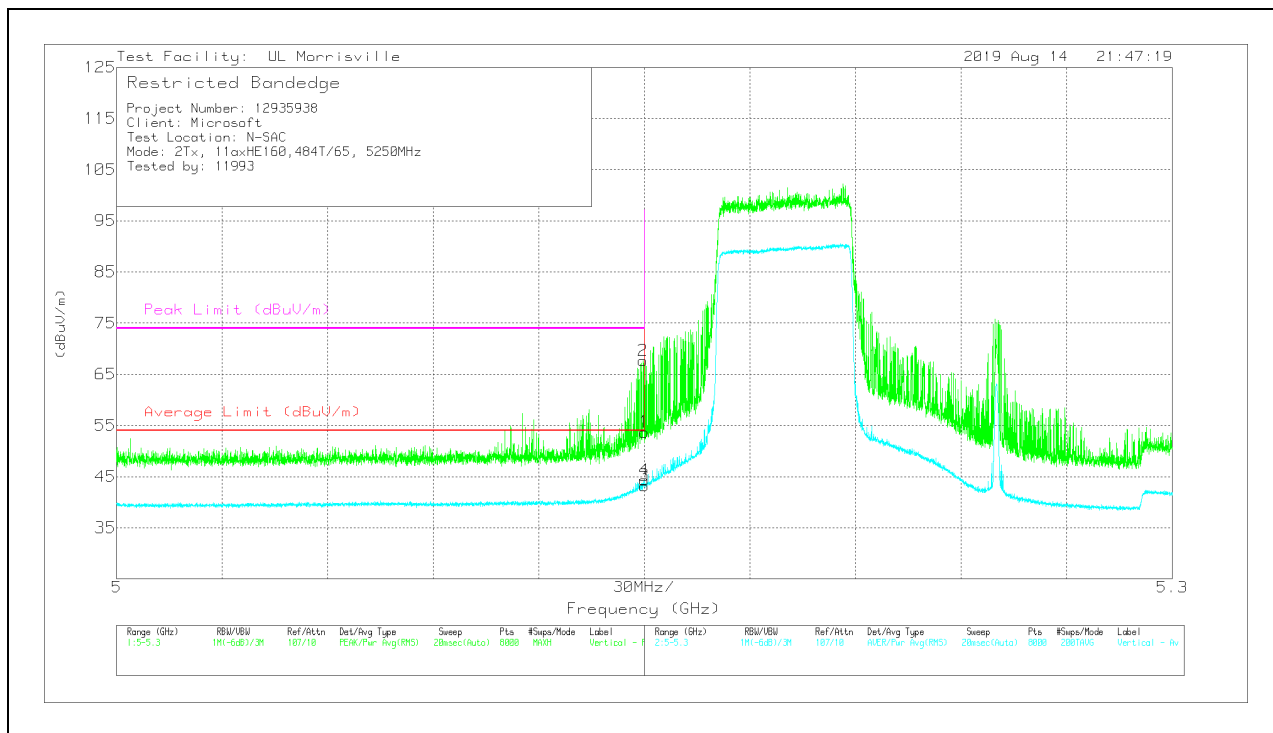

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	42.21	Pk	34.1	-22.6	53.71	-	-	74	-20.29	295	236	V
2	*** 5.14961	56.2	Pk	34.1	-22.6	67.7	-	-	74	-6.3	295	236	V
3	*** 5.14998	31.76	RMS	34.1	-22.6	43.26	54	-10.74	-	-	295	236	V
4	*** 5.14991	32.82	RMS	34.1	-22.6	44.32	54	-9.68	-	-	295	236	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index S66**

**BANDEDGE (MID CHANNEL HIGH EDGE)**


**HORIZONTAL RESULT**

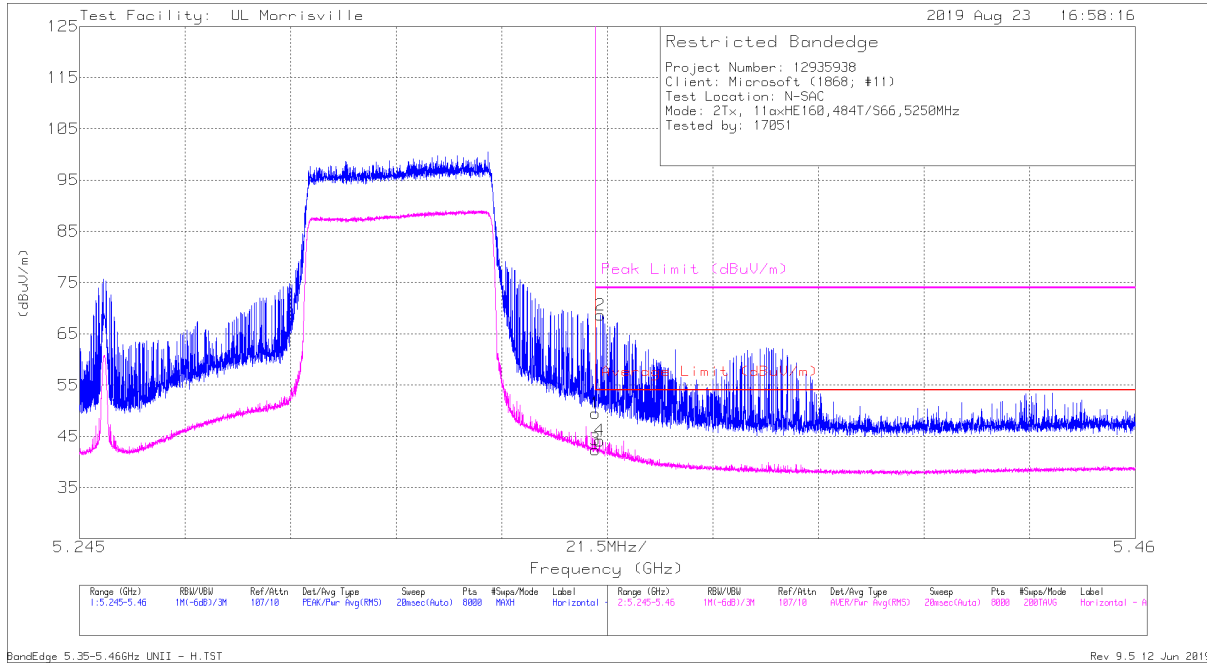

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	38.1	Pk	34.4	-23	49.5	-	-	74	-24.5	355	390	H
2	* 5.35103	57.28	Pk	34.4	-23	68.68	-	-	74	-5.32	355	390	H
3	* 5.35001	31	RMS	34.4	-23	42.4	54	-11.6	-	-	355	390	H
4	* 5.3509	32.75	RMS	34.4	-23	44.15	54	-9.85	-	-	355	390	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

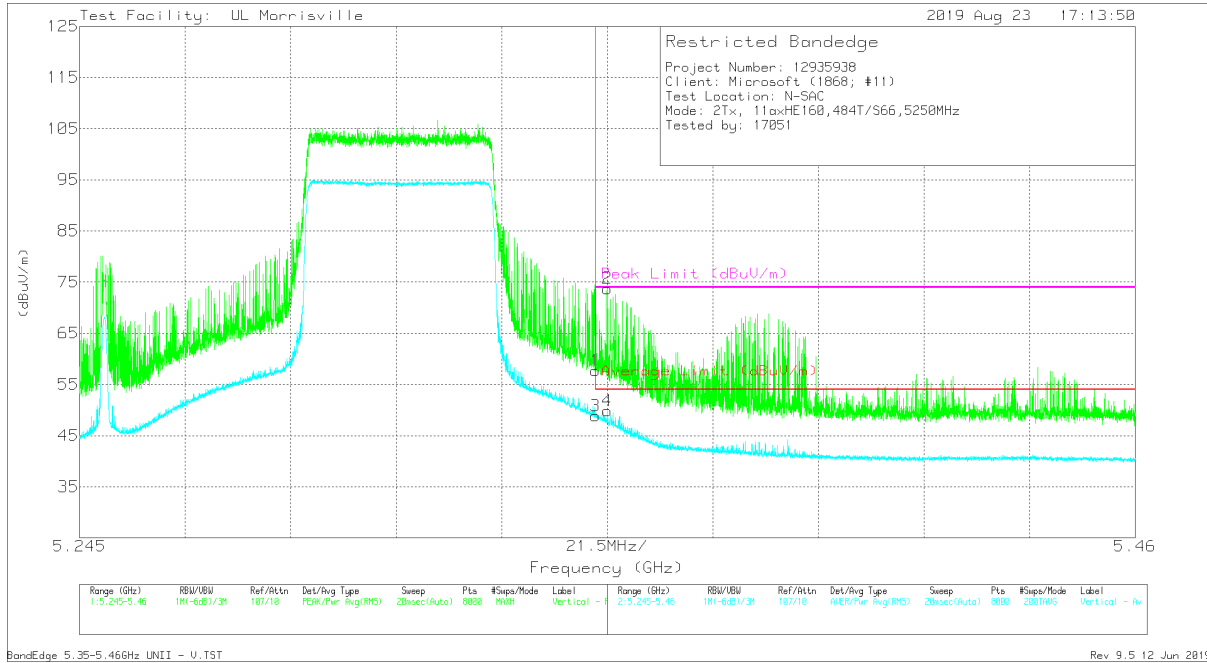

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	46.29	Pk	34.4	-23	57.69	-	-	74	-16.31	305	277	V
2	* 5.35251	62.46	Pk	34.4	-23.1	73.76	-	-	74	-.24	305	277	V
3	* 5.35001	37.43	RMS	34.4	-23	48.83	54	-5.17	-	-	305	277	V
4	* 5.35249	38.58	RMS	34.4	-23.1	49.88	54	-4.12	-	-	305	277	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**BANDEDGE (MID CHANNEL LOW EDGE)**


**HORIZONTAL RESULT**

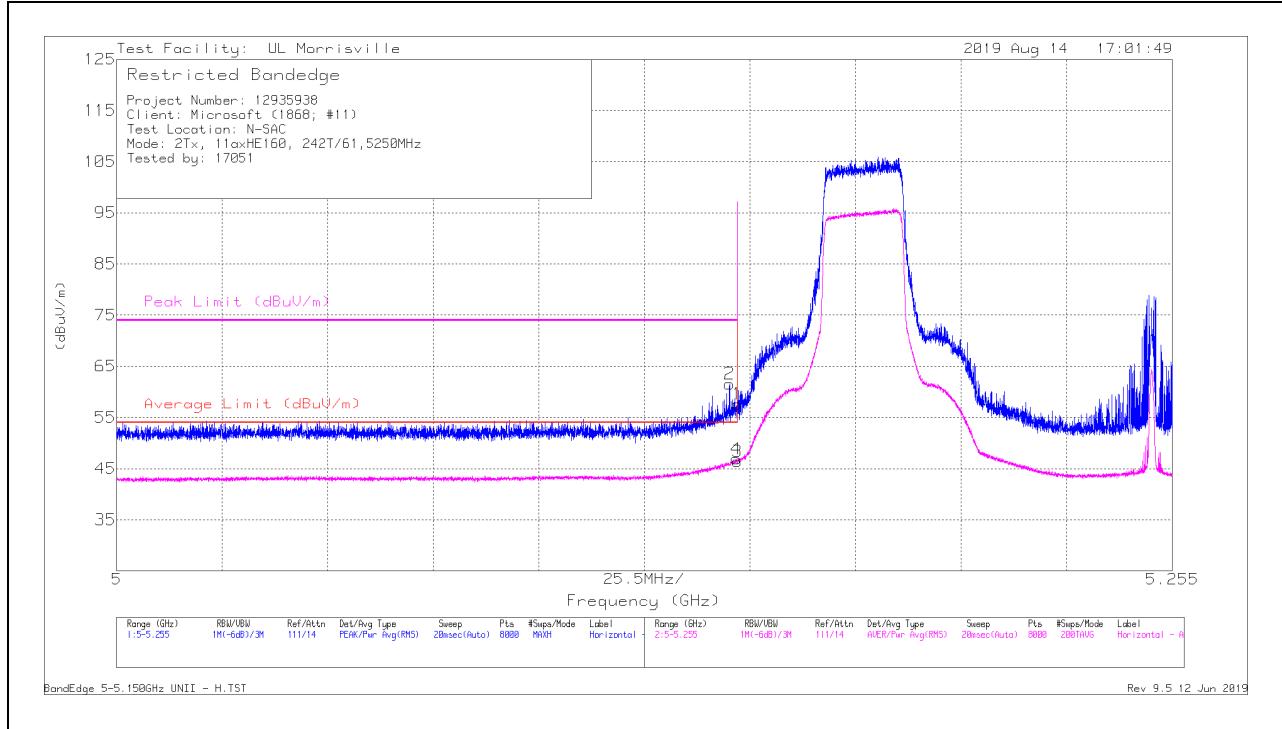

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	46.15	Pk	34.1	-22.6	57.65	-	-	74	-16.35	339	385	H
2	* ** 5.14805	50.08	Pk	34.1	-22.6	61.58	-	-	74	-12.42	339	385	H
3	* ** 5.14999	34.88	RMS	34.1	-22.6	46.38	54	-7.62	-	-	339	385	H
4	* ** 5.1497	35.38	RMS	34.1	-22.6	46.88	54	-7.12	-	-	339	385	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### VERTICAL RESULT

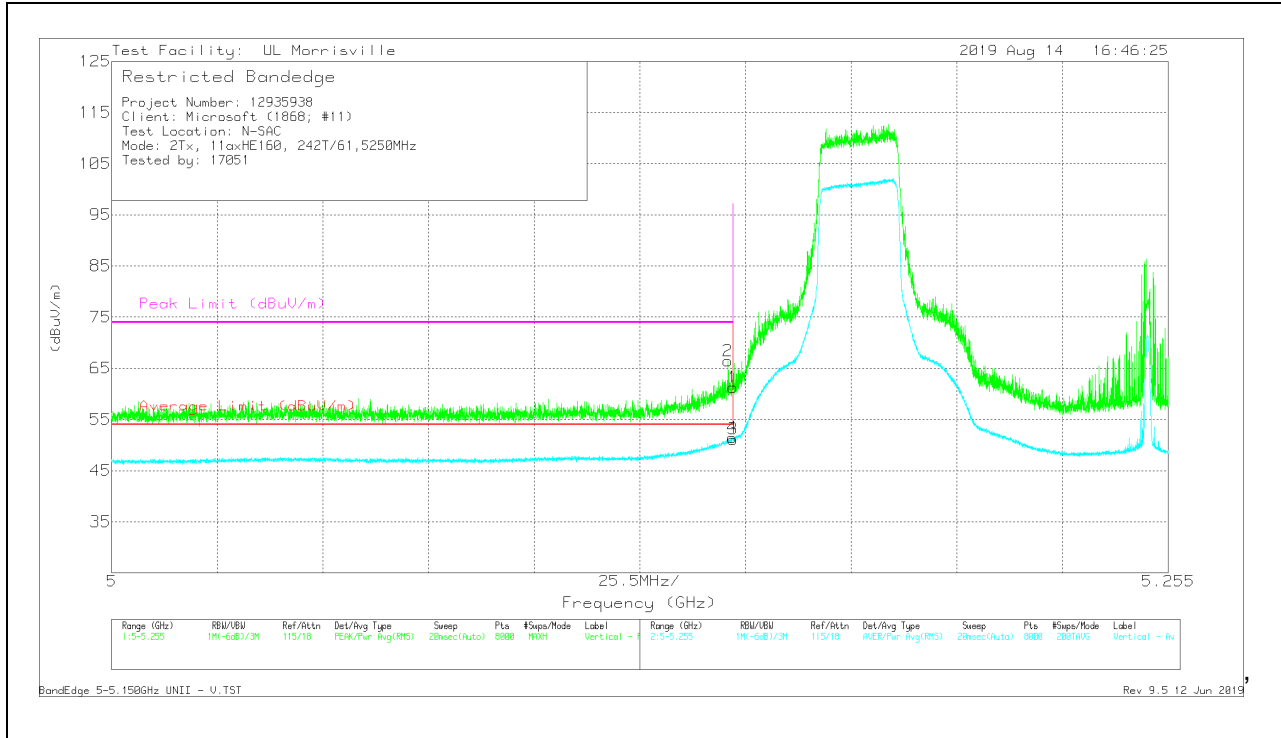


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	49.78	Pk	34.1	-22.6	61.28	-	-	74	-12.72	307	277	V
2	* ** 5.14878	54.97	Pk	34.1	-22.6	66.47	-	-	74	-7.53	307	277	V
3	* ** 5.14999	39.64	RMS	34.1	-22.6	51.14	54	-2.86	-	-	307	277	V
4	* ** 5.14977	39.96	RMS	34.1	-22.6	51.46	54	-2.54	-	-	307	277	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index S64**

**BANDEDGE (MID CHANNEL HIGH EDGE)**

**HORIZONTAL RESULT**

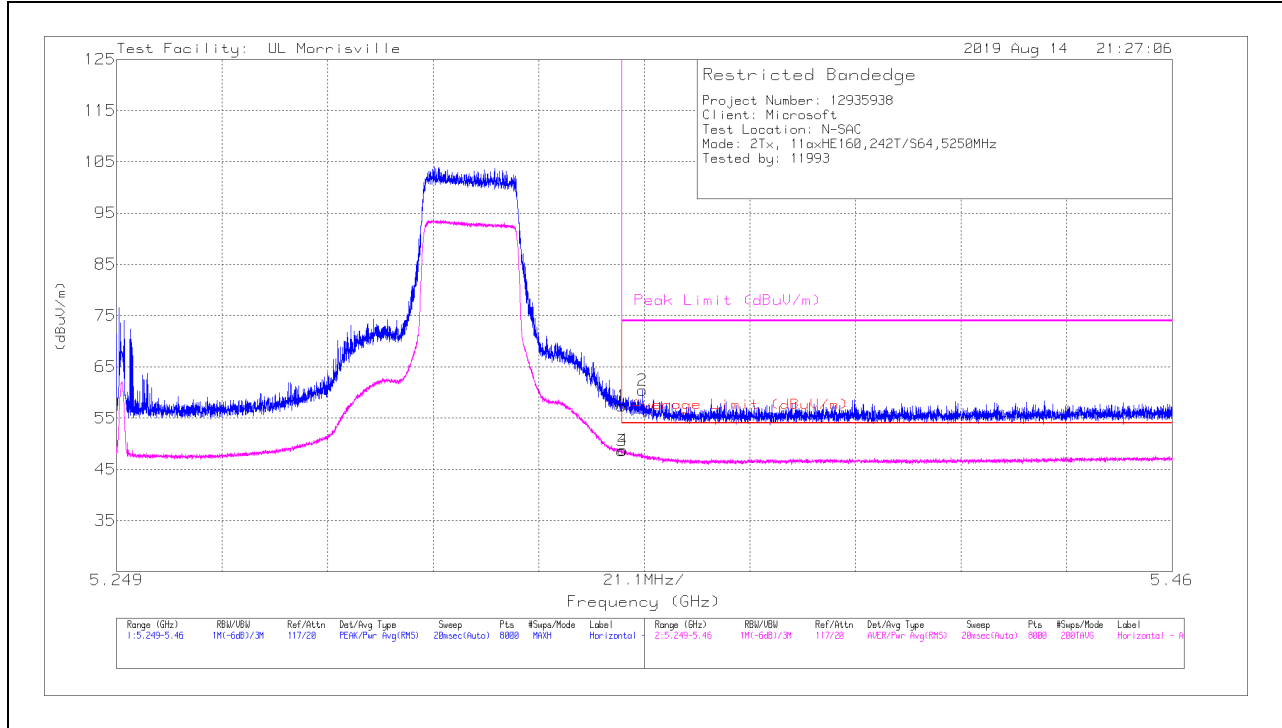

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35	45.93	Pk	34.4	-23	57.33	-	-	74	-16.67	344	288	H
2	*** 5.35412	49.09	Pk	34.4	-23.1	60.39	-	-	74	-13.61	344	288	H
3	*** 5.35	37.22	RMS	34.4	-23	48.62	54	-5.38	-	-	344	288	H
4	*** 5.35024	37.31	RMS	34.4	-23	48.71	54	-5.29	-	-	344	288	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

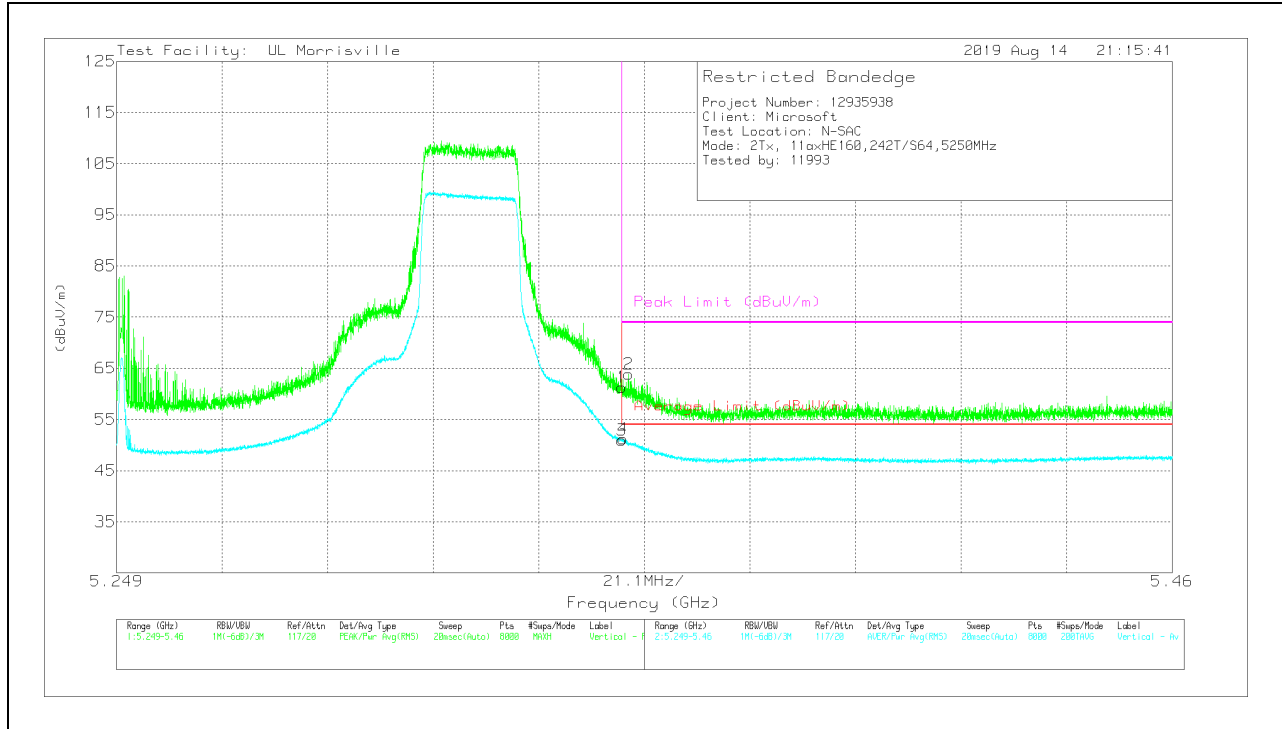


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35	49.9	Pk	34.4	-23	61.3	-	-	74	-12.7	336	196	V
2	* ** 5.35129	52.46	Pk	34.4	-23	63.86	-	-	74	-10.14	336	196	V
3	* ** 5.35	39.57	RMS	34.4	-23	50.97	54	-3.03	-	-	336	196	V
4	* ** 5.35024	39.77	RMS	34.4	-23	51.17	54	-2.83	-	-	336	196	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

**BANDEDGE (MID CHANNEL LOW EDGE)**

**HORIZONTAL RESULT**

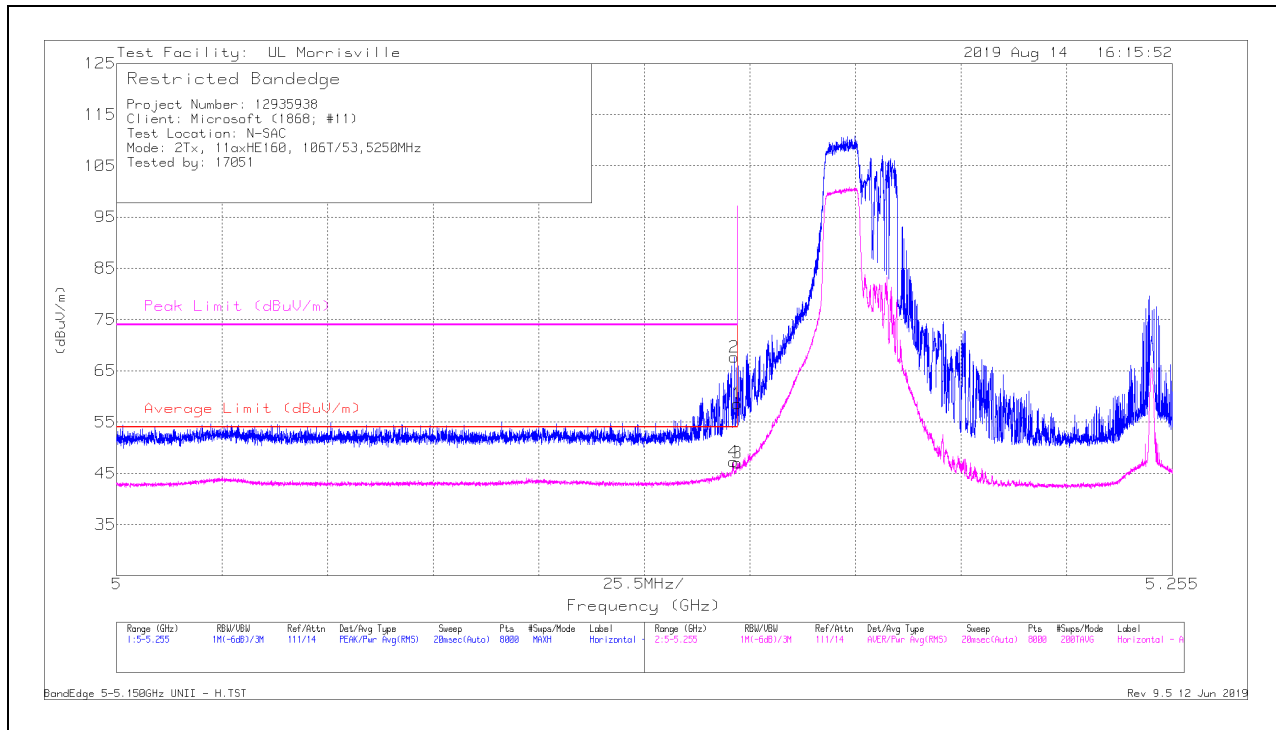

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	47.11	Pk	34.1	-22.6	58.61	-	-	74	-15.39	338	386	H
2	* ** 5.14913	56.2	Pk	34.1	-22.6	67.7	-	-	74	-6.3	338	386	H
3	* ** 5.14999	35.51	RMS	34.1	-22.6	47.01	54	-6.99	-	-	338	386	H
4	* ** 5.14907	35.76	RMS	34.1	-22.6	47.26	54	-6.74	-	-	338	386	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

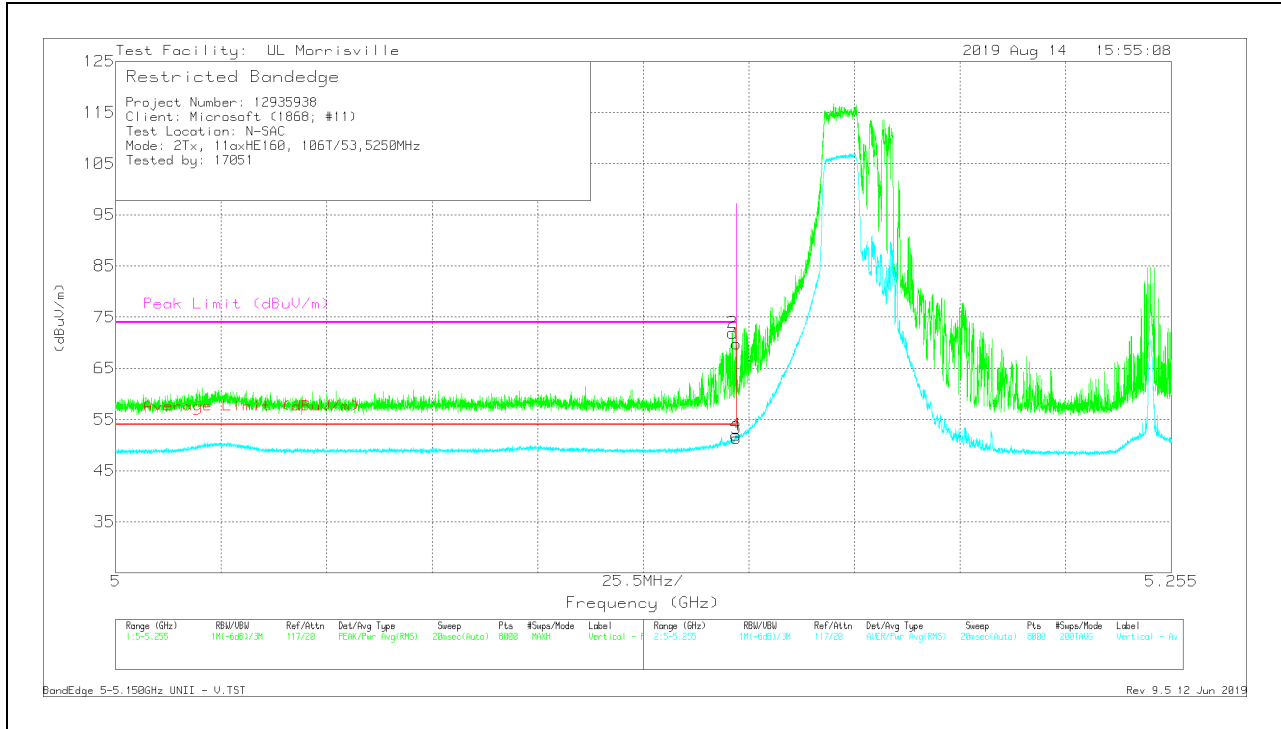

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	58.27	Pk	34.1	-22.6	69.77	-	-	74	-4.23	308	280	V
2	* ** 5.14897	60.43	Pk	34.1	-22.6	71.93	-	-	74	-2.07	308	280	V
3	* ** 5.14999	39.85	RMS	34.1	-22.6	51.35	54	-2.65	-	-	308	280	V
4	* ** 5.14986	40.49	RMS	34.1	-22.6	51.99	54	-2.01	-	-	308	280	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index S60**

**BANDEDGE (MID CHANNEL HIGH EDGE)**

**HORIZONTAL RESULT**

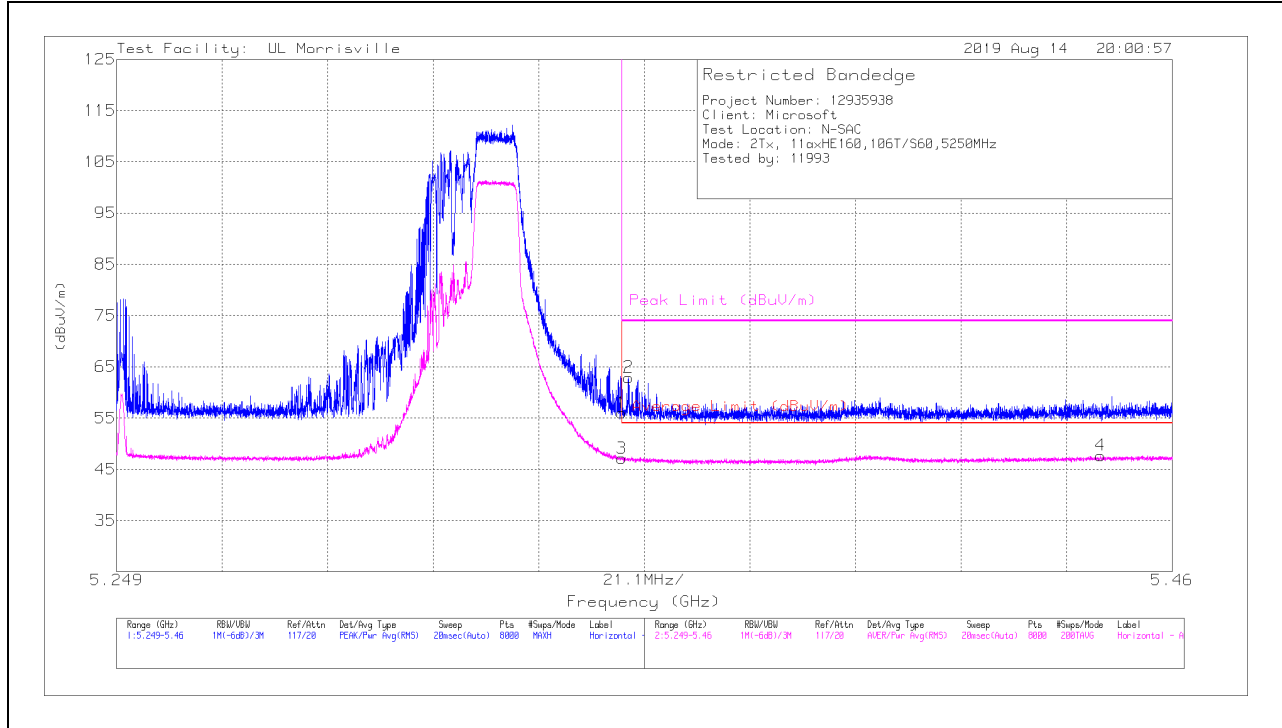

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35	44.57	Pk	34.4	-23	55.97	-	-	74	-18.03	313	356	H
2	*** 5.35135	51.53	Pk	34.4	-23	62.93	-	-	74	-11.07	313	356	H
3	*** 5.35	35.73	RMS	34.4	-23	47.13	54	-6.87	-	-	313	356	H
4	*** 5.44565	36.2	RMS	34.4	-22.9	47.7	54	-6.3	-	-	313	356	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

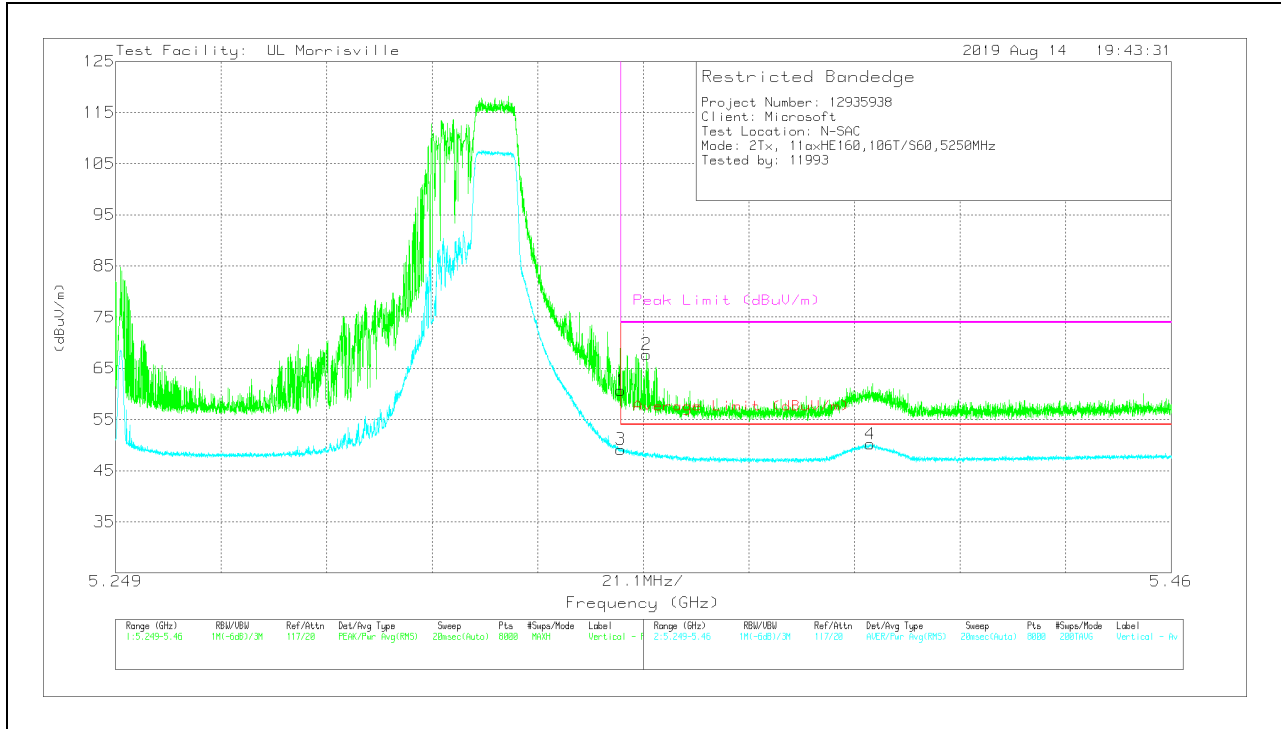


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35	49.26	Pk	34.4	-23	60.66	-	-	74	-13.34	342	281	V
2	* ** 5.35509	56.41	Pk	34.4	-23.1	67.71	-	-	74	-6.29	342	281	V
3	* ** 5.35	37.77	RMS	34.4	-23	49.17	54	-4.83	-	-	342	281	V
4	* ** 5.3998	38.82	RMS	34.4	-23	50.22	54	-3.78	-	-	342	281	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**BANDEDGE (MID CHANNEL LOW EDGE)**

**HORIZONTAL RESULT**

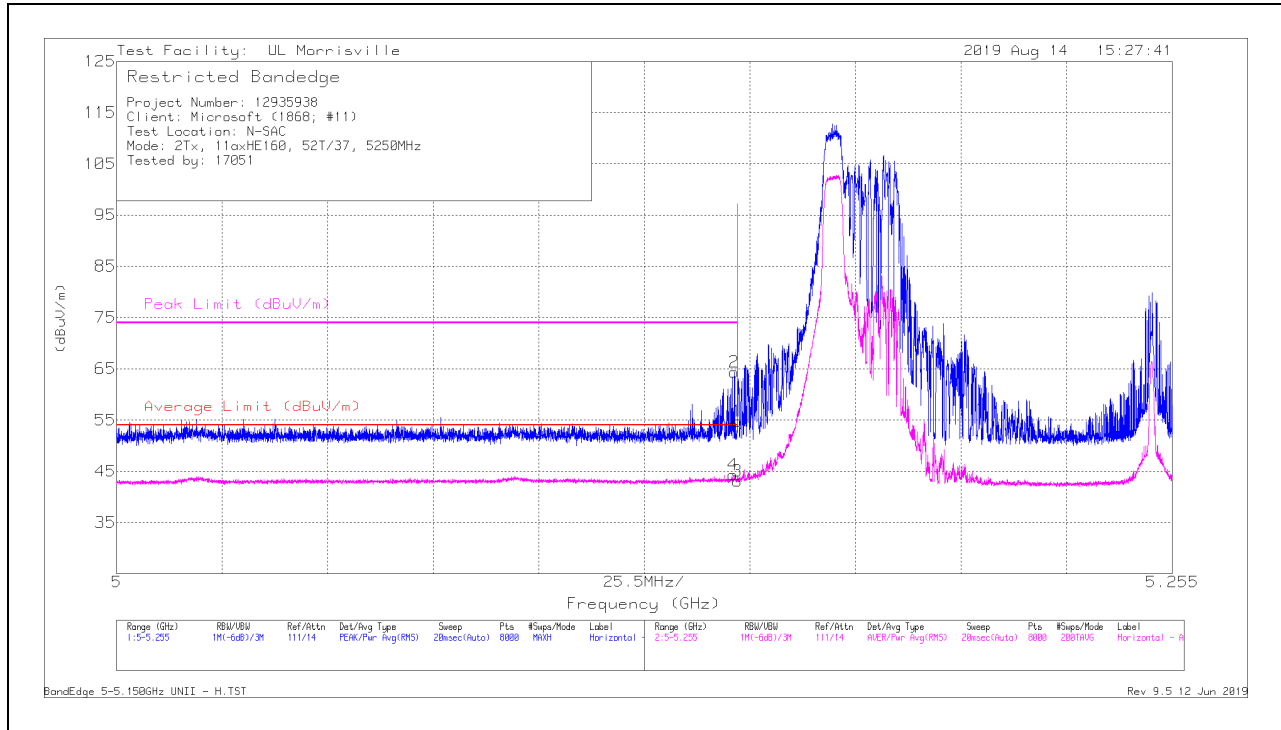

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	43.27	Pk	34.1	-22.6	54.77	-	-	74	-19.23	339	387	H
2	* ** 5.14923	52.83	Pk	34.1	-22.6	64.33	-	-	74	-9.67	339	387	H
3	* ** 5.14999	31.62	RMS	34.1	-22.6	43.12	54	-10.88	-	-	339	387	H
4	* ** 5.14891	32.79	RMS	34.1	-22.6	44.29	54	-9.71	-	-	339	387	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

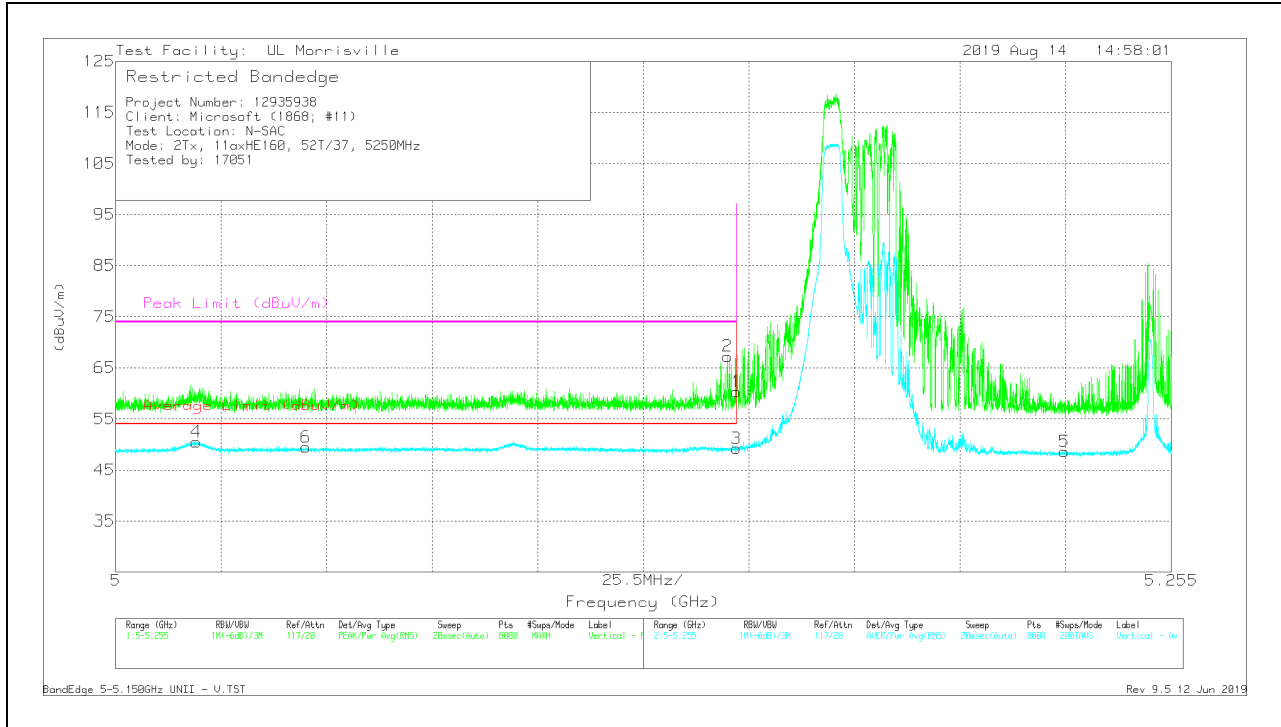


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	48.83	Pk	34.1	-22.6	60.33	-	-	74	-13.67	345	269	V
2	*** 5.14776	55.74	Pk	34.1	-22.6	67.24	-	-	74	-6.76	345	269	V
3	** 5.14999	37.7	RMS	34.1	-22.6	49.2	54	-4.8	-	-	345	269	V
4	*** 5.01948	38.71	RMS	34	-22.2	50.51	54	-3.49	-	-	345	269	V
5	** 5.22911	37.22	RMS	34.2	-22.8	48.62	-	-	-	-	345	269	V
6	*** 5.04594	37.75	RMS	34	-22.3	49.45	54	-4.55	-	-	345	269	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index S52**

**BANDEDGE (MID CHANNEL HIGH EDGE)**

**HORIZONTAL RESULT**

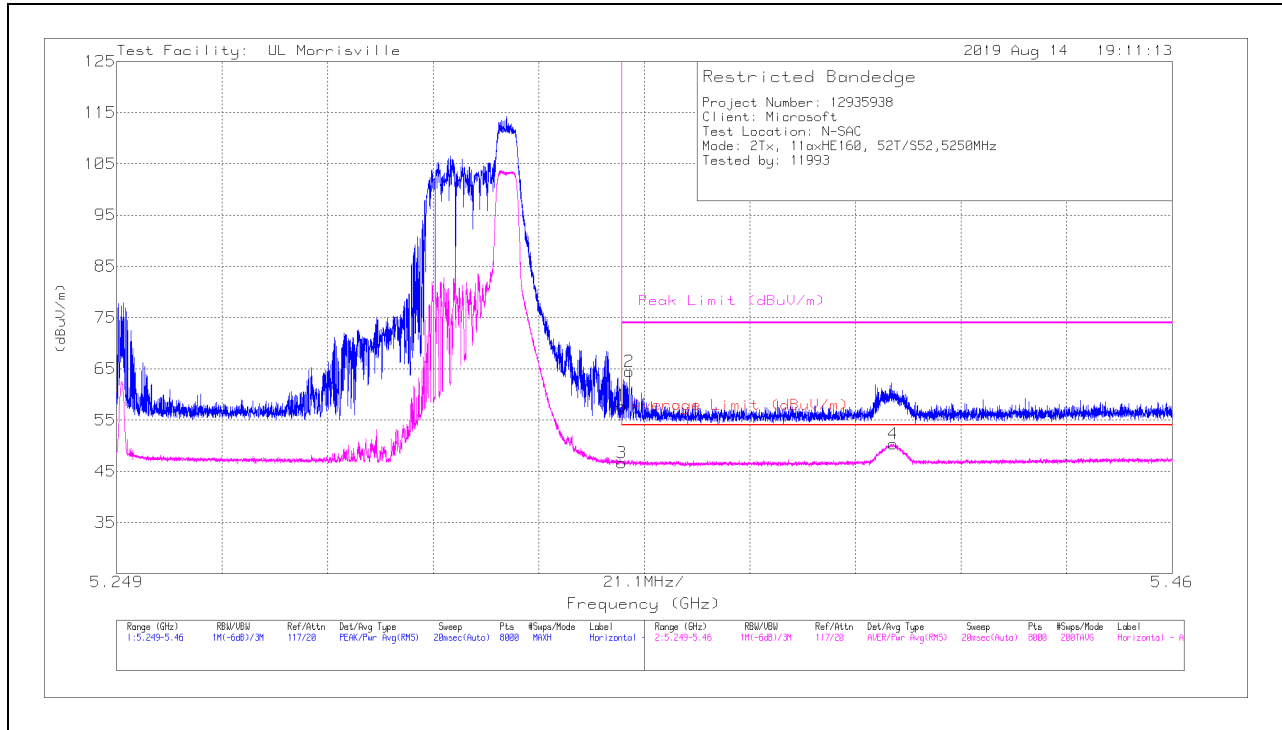

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35	46.37	Pk	34.4	-23	57.77	-	-	74	-16.23	349	359	H
2	*** 5.35143	53.08	Pk	34.4	-23	64.48	-	-	74	-9.52	349	359	H
3	*** 5.35	35.28	RMS	34.4	-23	46.68	54	-7.32	-	-	349	359	H
4	*** 5.40418	38.94	RMS	34.4	-23	50.34	54	-3.66	-	-	349	359	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

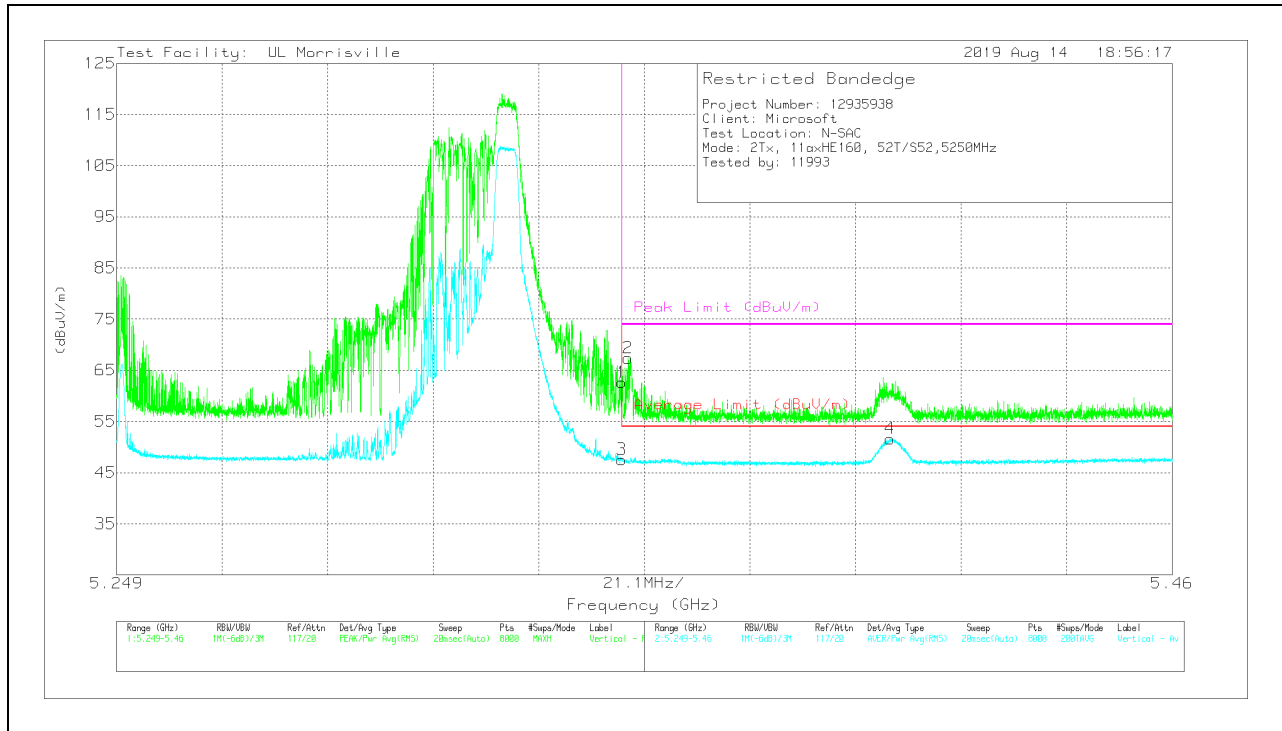


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35	51.21	Pk	34.4	-23	62.61	-	-	74	-11.39	354	268	V
2	* ** 5.35119	55.98	Pk	34.4	-23	67.38	-	-	74	-6.62	354	268	V
3	* ** 5.35	36.16	RMS	34.4	-23	47.56	54	-6.44	-	-	354	268	V
4	* ** 5.4036	40.23	RMS	34.4	-23	51.63	54	-2.37	-	-	354	268	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**BANDEDGE (MID CHANNEL LOW EDGE)**

**HORIZONTAL RESULT**

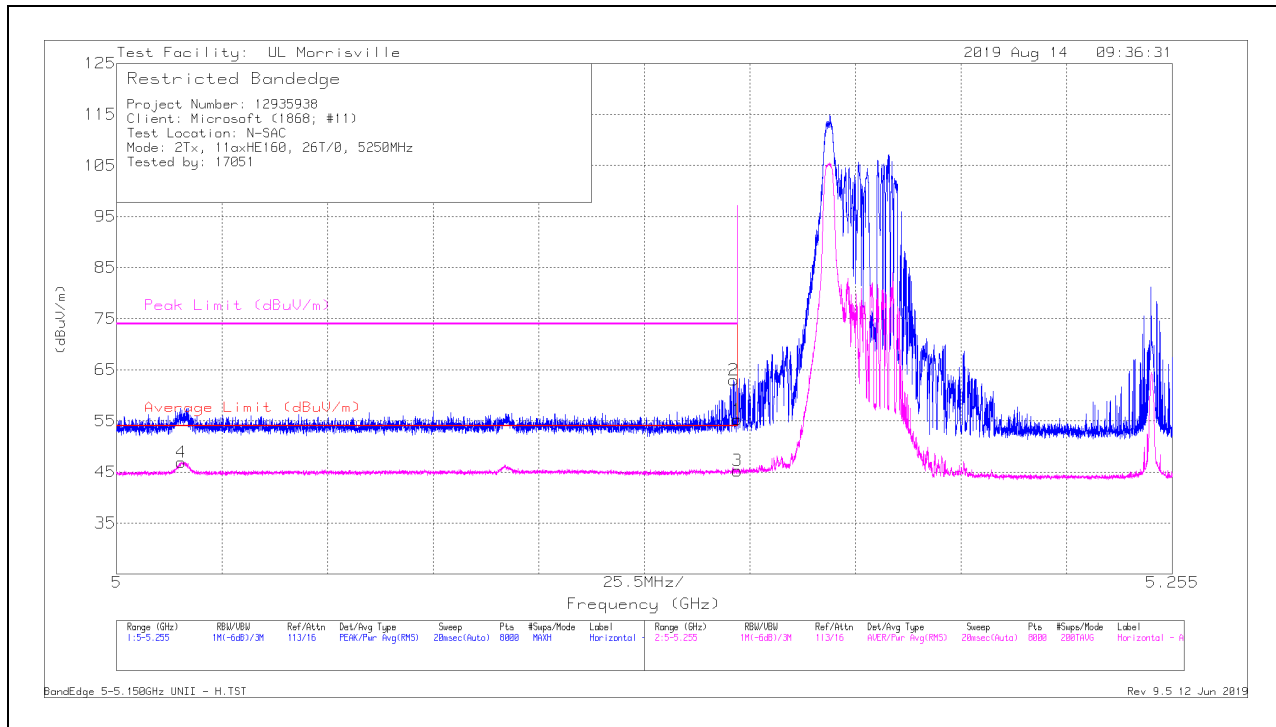

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	43.77	Pk	34.1	-22.6	55.27	-	-	74	-18.73	326	390	H
2	* ** 5.1491	51.52	Pk	34.1	-22.6	63.02	-	-	74	-10.98	326	390	H
3	* ** 5.14999	33.75	RMS	34.1	-22.6	45.25	54	-8.75	-	-	326	390	H
4	* ** 5.01556	35.07	RMS	34	-22.2	46.87	54	-7.13	-	-	326	390	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

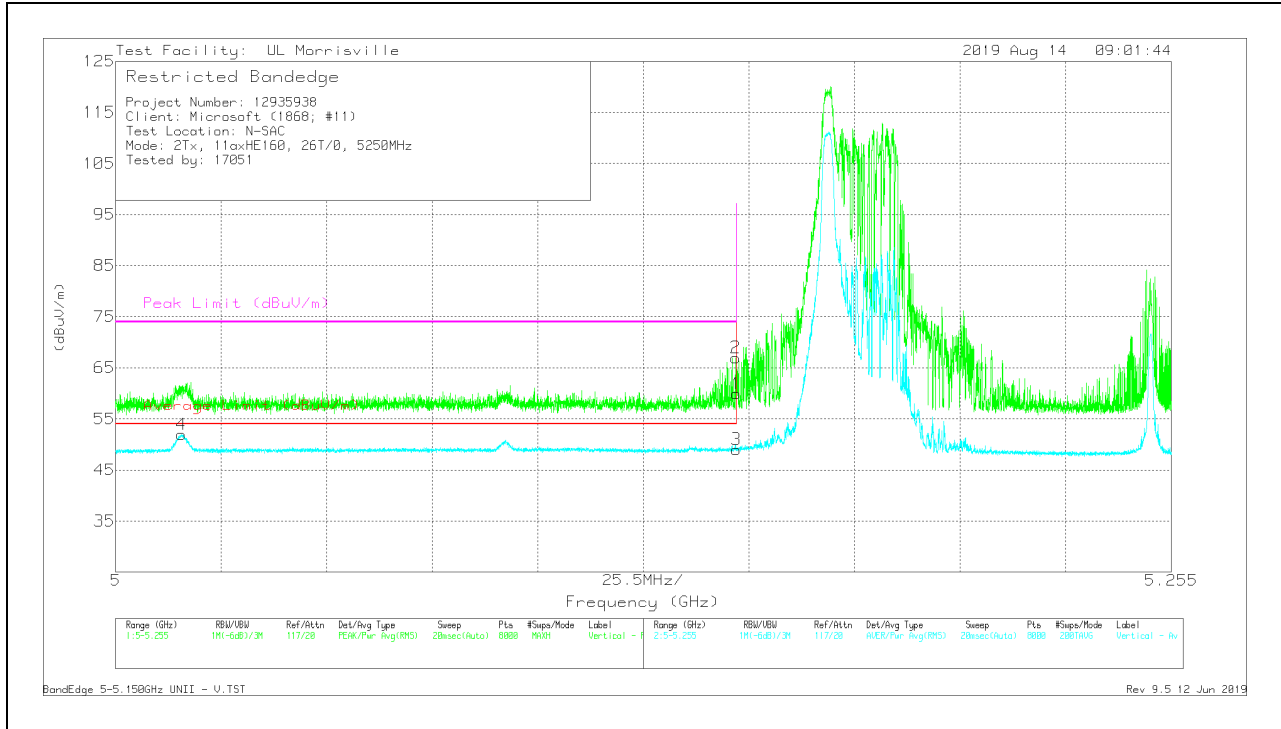

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	48.44	Pk	34.1	-22.6	59.94	-	-	74	-14.06	344	265	V
2	* ** 5.14974	55.49	Pk	34.1	-22.6	66.99	-	-	74	-7.01	344	265	V
3	* ** 5.14999	37.53	RMS	34.1	-22.6	49.03	54	-4.97	-	-	344	265	V
4	* ** 5.01597	40.15	RMS	34	-22.2	51.95	54	-2.05	-	-	344	265	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index S36**

**BANDEDGE (MID CHANNEL HIGH EDGE)**

**HORIZONTAL RESULT**

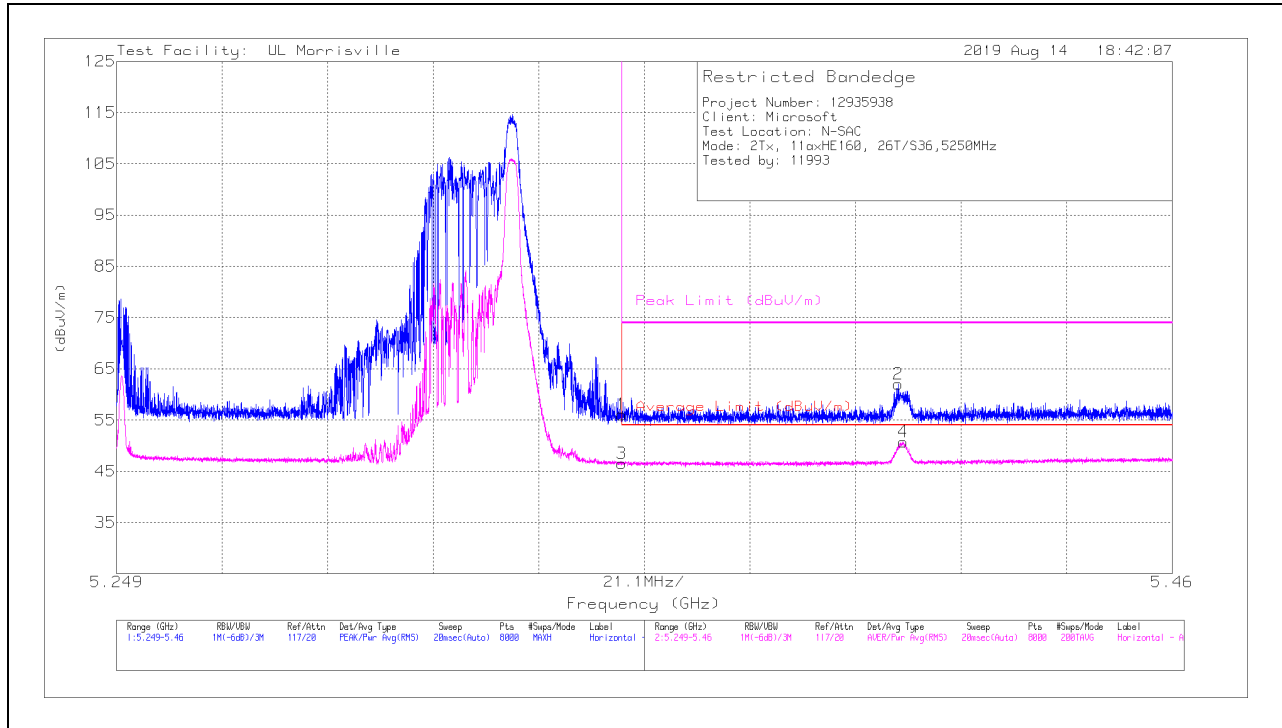

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35	44.67	Pk	34.4	-23	56.07	-	-	74	-17.93	350	378	H
2	*** 5.40518	50.58	Pk	34.4	-23	61.98	-	-	74	-12.02	350	378	H
3	*** 5.35	35.15	RMS	34.4	-23	46.55	54	-7.45	-	-	350	378	H
4	*** 5.40627	39.35	RMS	34.4	-23	50.75	54	-3.25	-	-	350	378	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

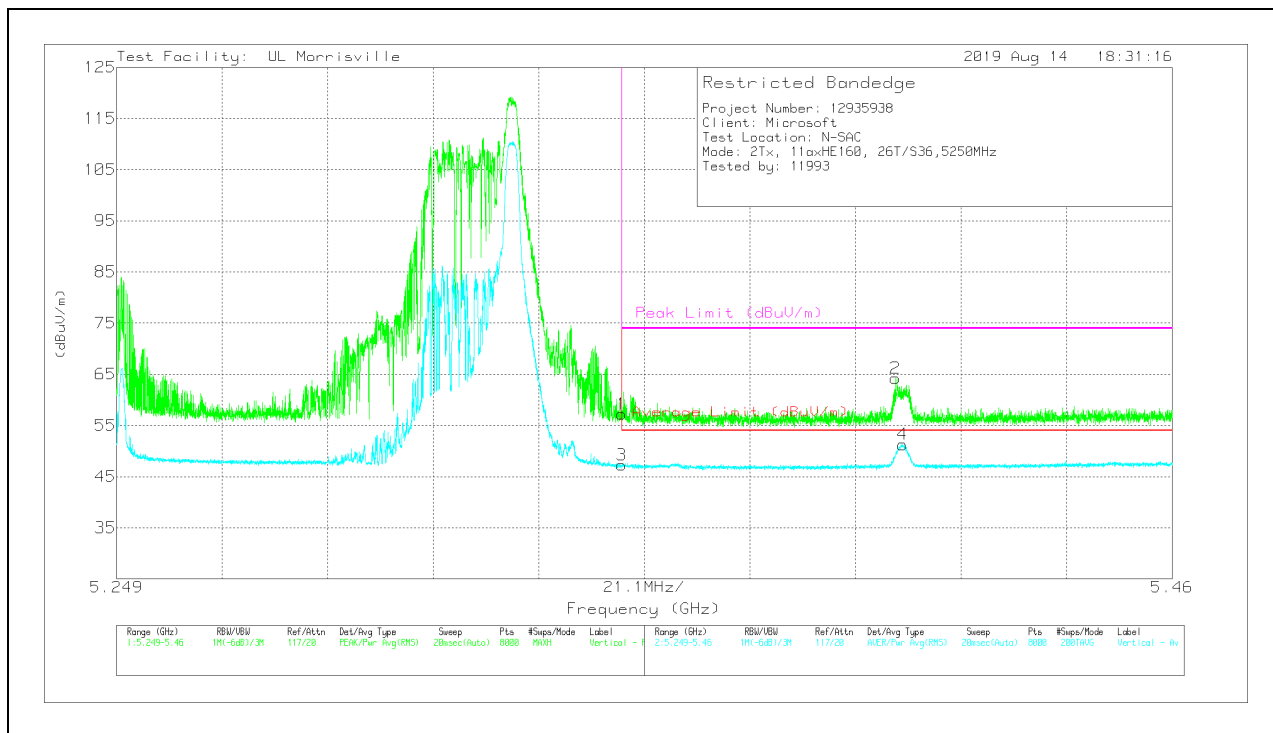

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35	45.79	Pk	34.4	-23	57.19	-	-	74	-16.81	353	255	V
2	*** 5.40466	52.86	Pk	34.4	-23	64.26	-	-	74	-9.74	353	255	V
3	*** 5.35	35.85	RMS	34.4	-23	47.25	54	-6.75	-	-	353	255	V
4	*** 5.40608	39.87	RMS	34.4	-23	51.27	54	-2.73	-	-	353	255	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

### 10.2. WORST-CASE BELOW 1GHz AND ABOVE 18 GHz

Radiated emissions below 1GHz, above 18GHz, and power line conducted emissions were performed in worst-case test report R12935938-E11 (FCC ID: C3K1868, IC: 3048A-1868)

## **11. AC LINE CONDUCTED EMISSIONS**

Radiated emissions below 1GHz, above 18GHz, and power line conducted emissions were performed in worst-case test report R12935938-E11 (FCC ID: C3K1868, IC: 3048A-1868).

## **12. SETUP PHOTOS**

Please refer to 12935938-EP1 for setup photos.

**END OF TEST REPORT**