


VERTICAL RESULT

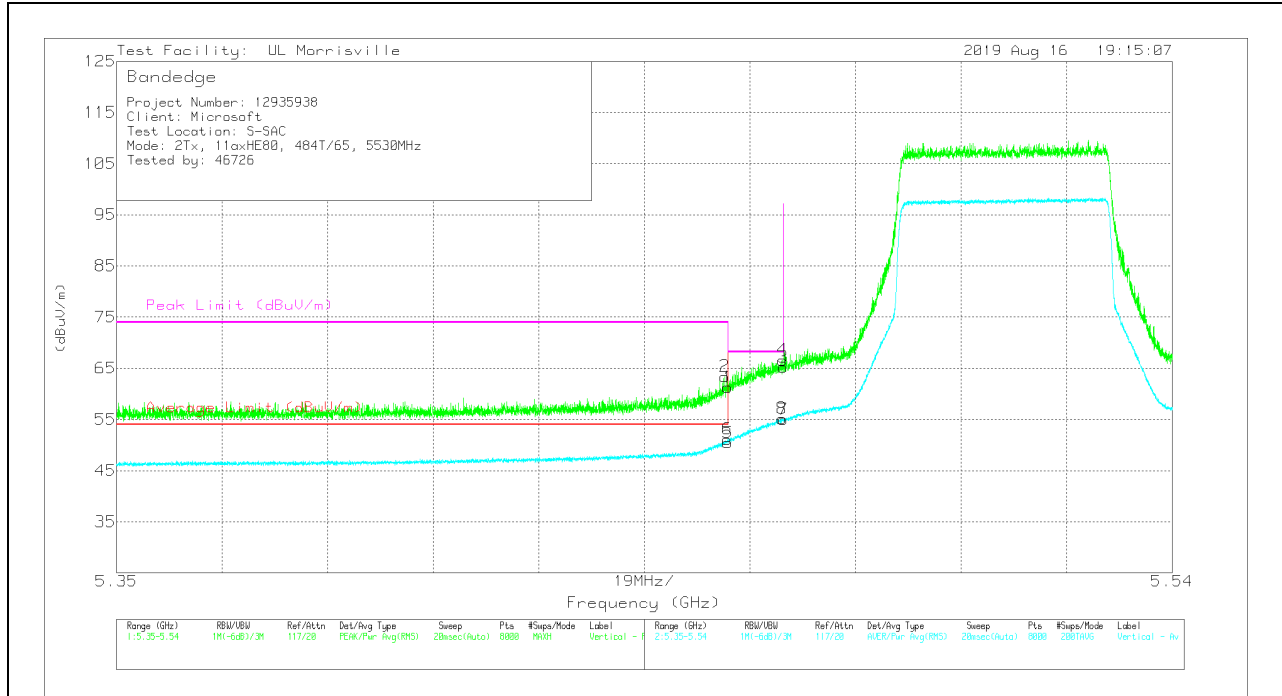

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	50.19	Pk	34.5	-23.4	61.29	-	-	74	-12.71	53	214	V
2	* ** 5.45943	52.32	Pk	34.5	-23.4	63.42	-	-	74	-10.58	53	214	V
5	* ** 5.45998	39.33	RMS	34.5	-23.4	50.43	54	-3.57	-	-	53	214	V
6	* ** 5.45993	40.04	RMS	34.5	-23.4	51.14	54	-2.86	-	-	53	214	V
8	5.46976	44.17	RMS	34.5	-23.5	55.17	-	-	-	-	53	214	V
4	5.46983	55.62	PK	34.5	-23.5	66.62	-	-	68.2	-1.58	53	214	V
3	5.46998	54.22	Pk	34.5	-23.5	65.22	-	-	68.2	-2.98	53	214	V
7	5.46998	44	RMS	34.5	-23.5	55	-	-	-	-	53	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 66

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

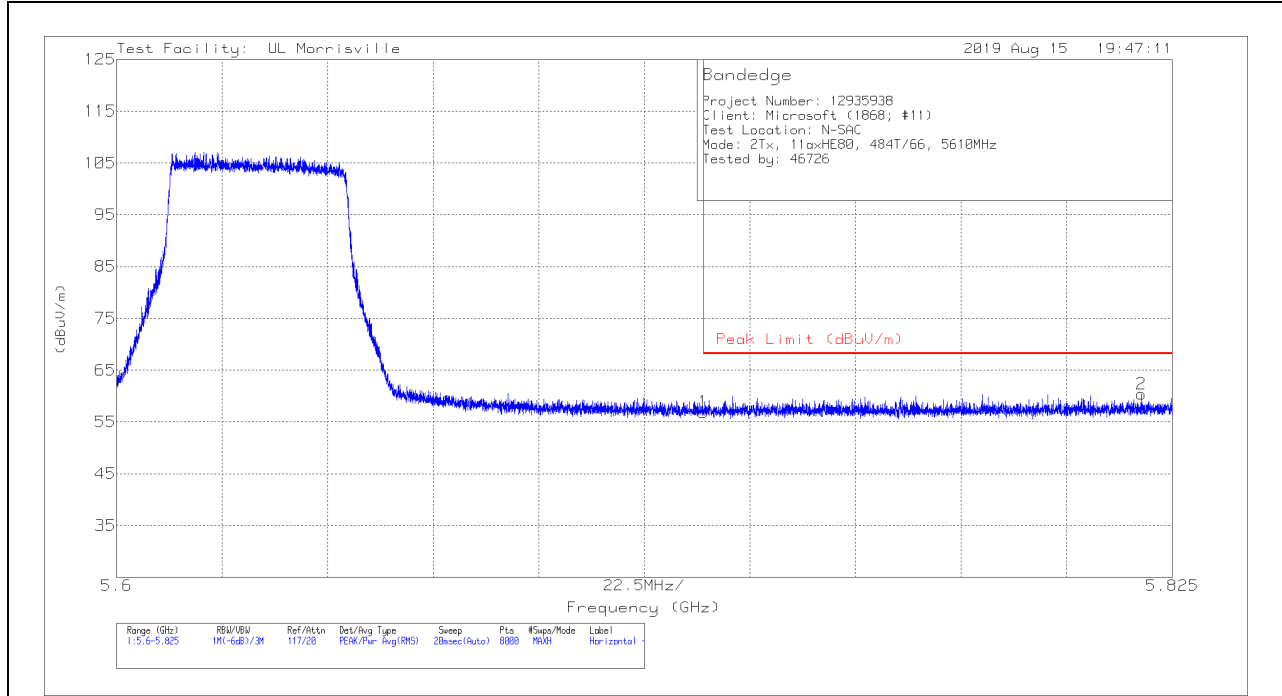

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.21	Pk	34.6	-22.9	56.91	68.2	-11.29	35	381	H
2	5.81842	48.22	Pk	34.8	-22.6	60.42	68.2	-7.78	35	381	H

Pk - Peak detector

VERTICAL RESULT

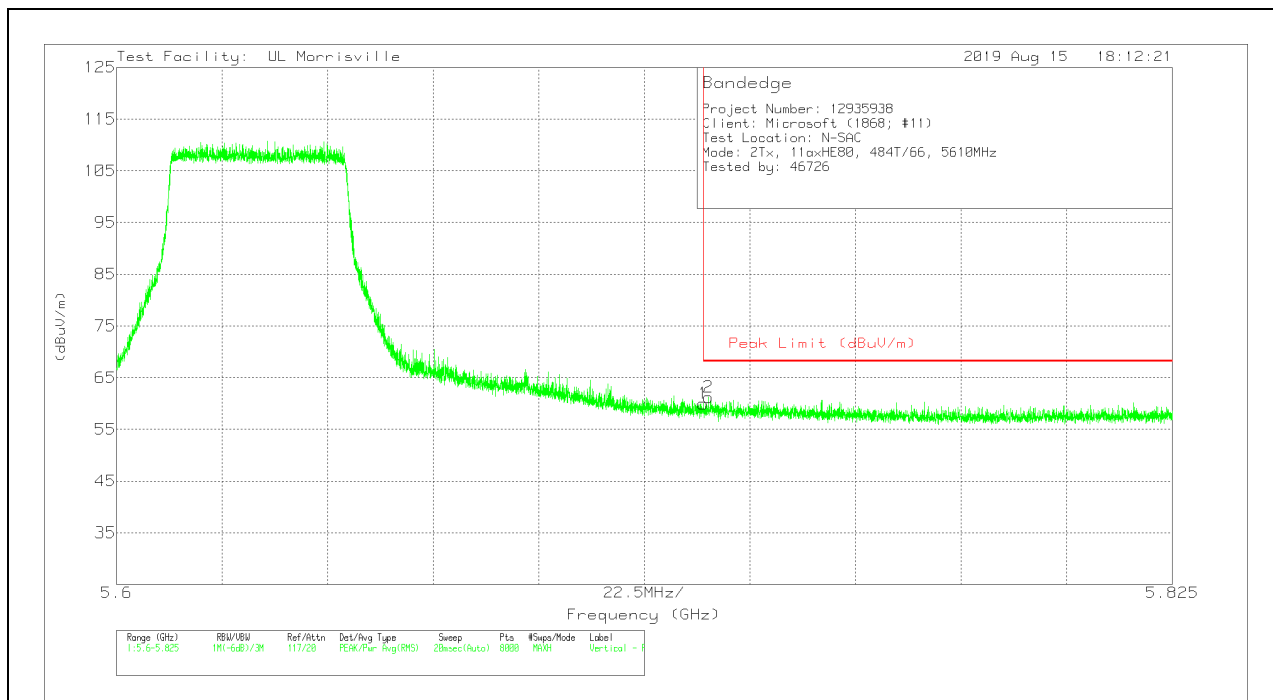


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	48.28	Pk	34.6	-22.9	59.98	68.2	-8.22	275	259	V
2	5.72613	49.5	Pk	34.6	-22.9	61.2	68.2	-7	275	259	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

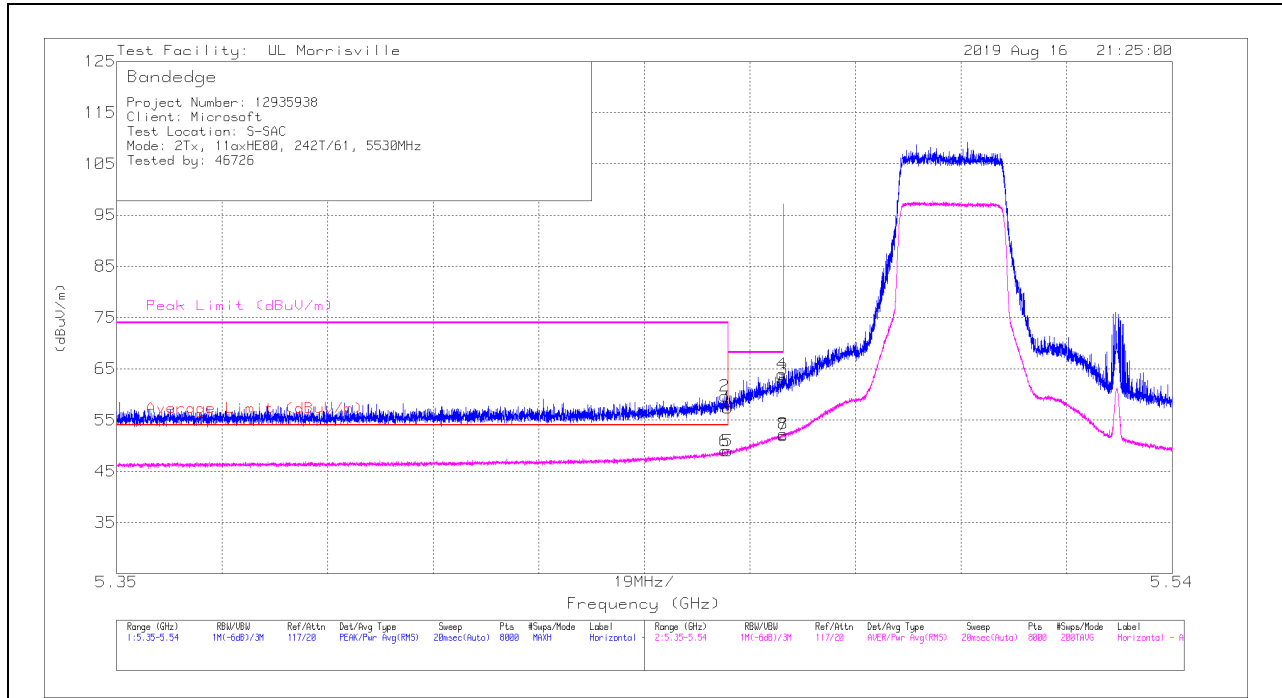

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	46.27	Pk	34.5	-23.4	57.37	-	-	74	-16.63	60	378	H
2	* ** 5.45943	48.58	Pk	34.5	-23.4	59.68	-	-	74	-14.32	60	378	H
5	* ** 5.45998	37.89	RMS	34.5	-23.4	48.99	54	-5.01	-	-	60	378	H
6	* ** 5.45945	37.9	RMS	34.5	-23.4	49	54	-5	-	-	60	378	H
4	5.46974	52.94	Pk	34.5	-23.5	63.94	-	-	68.2	-4.26	60	378	H
8	5.46995	41.26	RMS	34.5	-23.5	52.26	-	-	-	-	60	378	H
3	5.46998	52.03	Pk	34.5	-23.5	63.03	-	-	68.2	-5.17	60	378	H
7	5.46998	41	RMS	34.5	-23.5	52	-	-	-	-	60	378	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

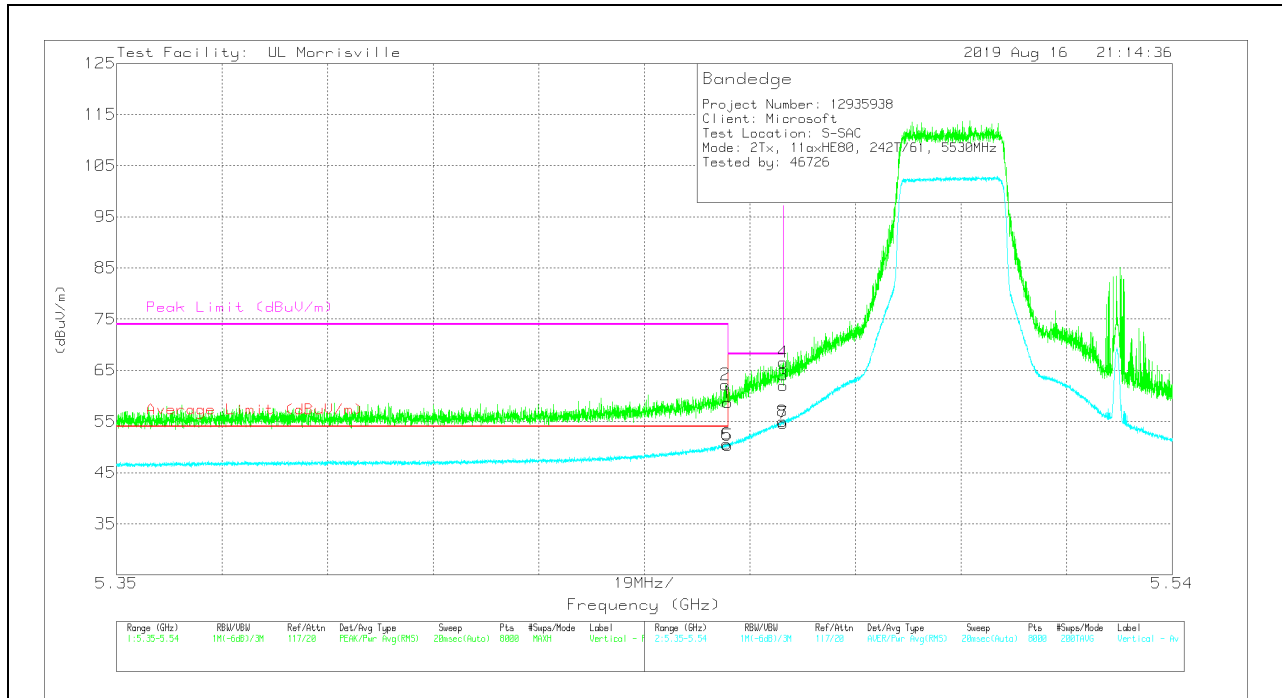


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	47.64	Pk	34.5	-23.4	58.74	-	-	74	-15.26	52	239	V
2	* ** 5.4596	51.08	Pk	34.5	-23.4	62.18	-	-	74	-11.82	52	239	V
5	* ** 5.45998	39.22	RMS	34.5	-23.4	50.32	54	-3.68	-	-	52	239	V
6	* ** 5.45979	39.5	RMS	34.5	-23.4	50.6	54	-3.4	-	-	52	239	V
8	5.46986	44.04	RMS	34.5	-23.5	55.04	-	-	-	-	52	239	V
4	5.46993	55.53	Pk	34.5	-23.5	66.53	-	-	68.2	-1.67	52	239	V
3	5.46998	51.08	Pk	34.5	-23.5	62.08	-	-	68.2	-6.12	52	239	V
7	5.46998	43.68	RMS	34.5	-23.5	54.68	-	-	-	-	52	239	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 64

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

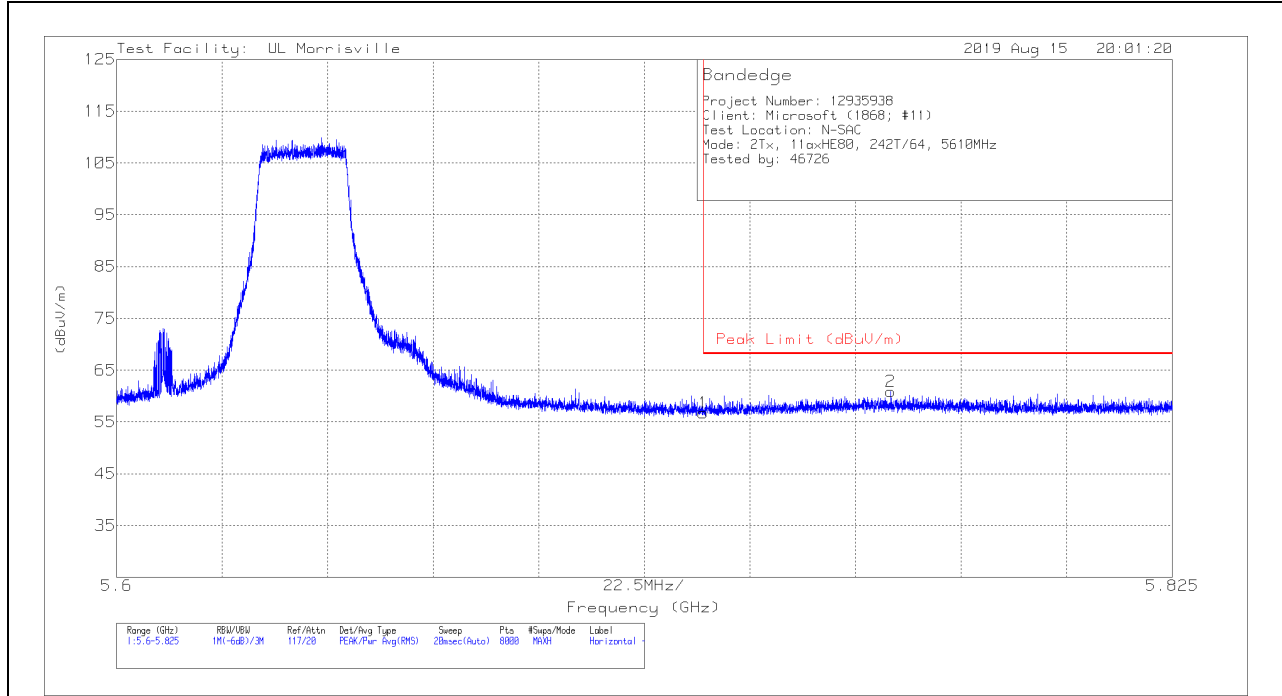

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.02	Pk	34.6	-22.9	56.72	68.2	-11.48	249	395	H
2	5.76503	48.98	Pk	34.7	-22.8	60.88	68.2	-7.32	249	395	H

Pk - Peak detector

VERTICAL RESULT

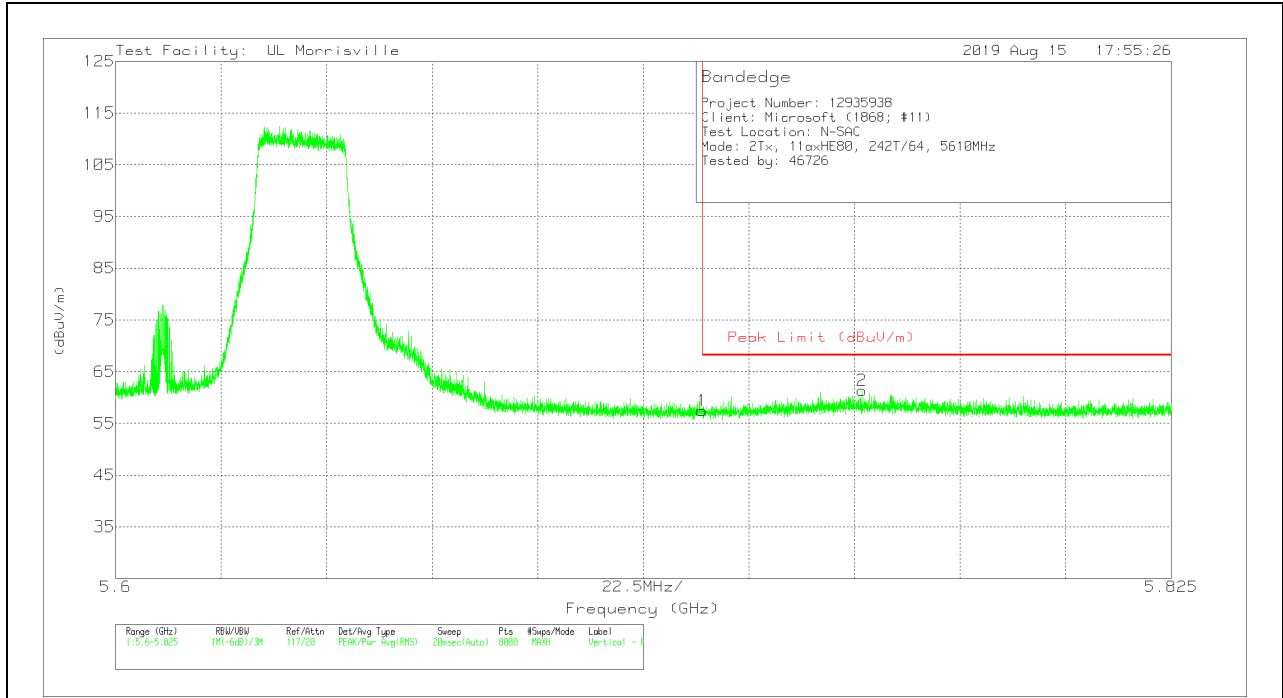


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.78	Pk	34.6	-22.9	57.48	68.2	-10.72	263	251	V
2	5.75907	49.46	Pk	34.7	-22.8	61.36	68.2	-6.84	263	251	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

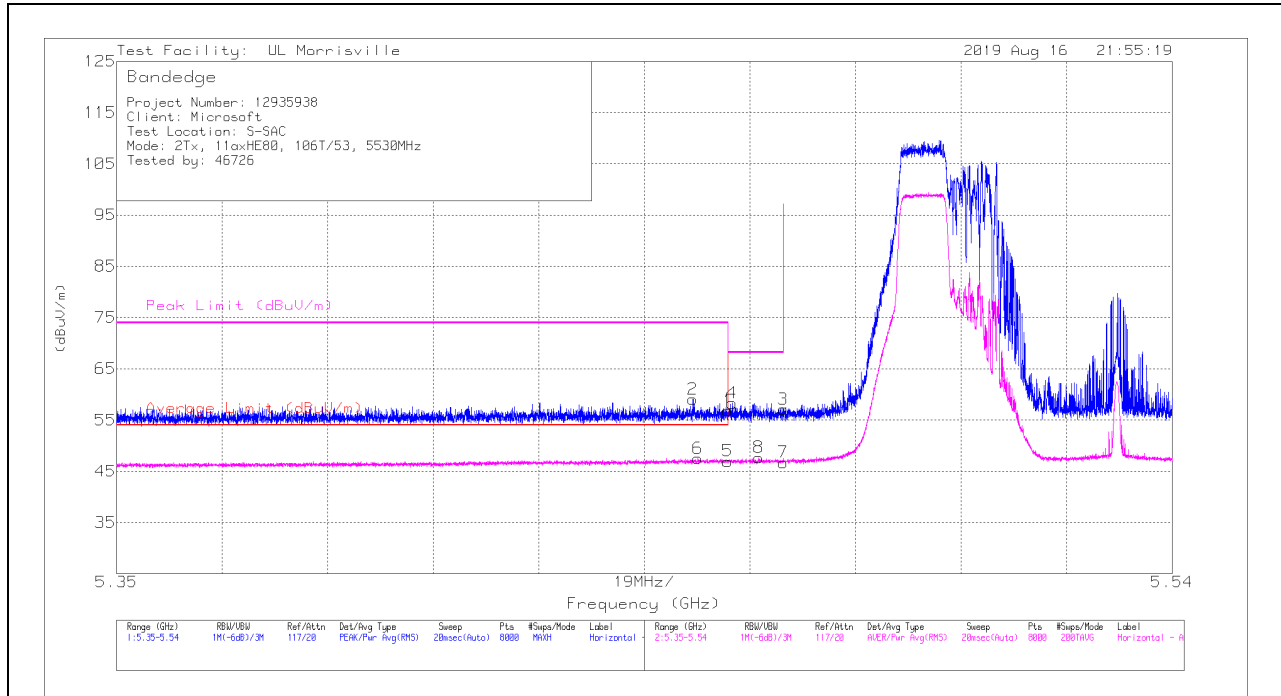

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	45.79	Pk	34.5	-23.4	56.89	-	-	74	-17.11	61	349	H
2	* ** 5.45373	47.9	Pk	34.5	-23.3	59.1	-	-	74	-14.9	61	349	H
5	* ** 5.45998	35.86	RMS	34.5	-23.4	46.96	54	-7.04	-	-	61	349	H
6	* ** 5.45461	36.43	RMS	34.5	-23.4	47.53	54	-6.47	-	-	61	349	H
4	5.46076	47.19	Pk	34.5	-23.4	58.29	-	-	68.2	-9.91	61	349	H
8	5.46558	36.69	RMS	34.5	-23.5	47.69	-	-	-	-	61	349	H
3	5.46998	46.07	Pk	34.5	-23.5	57.07	-	-	68.2	-11.13	61	349	H
7	5.46998	35.72	RMS	34.5	-23.5	46.72	-	-	-	-	61	349	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

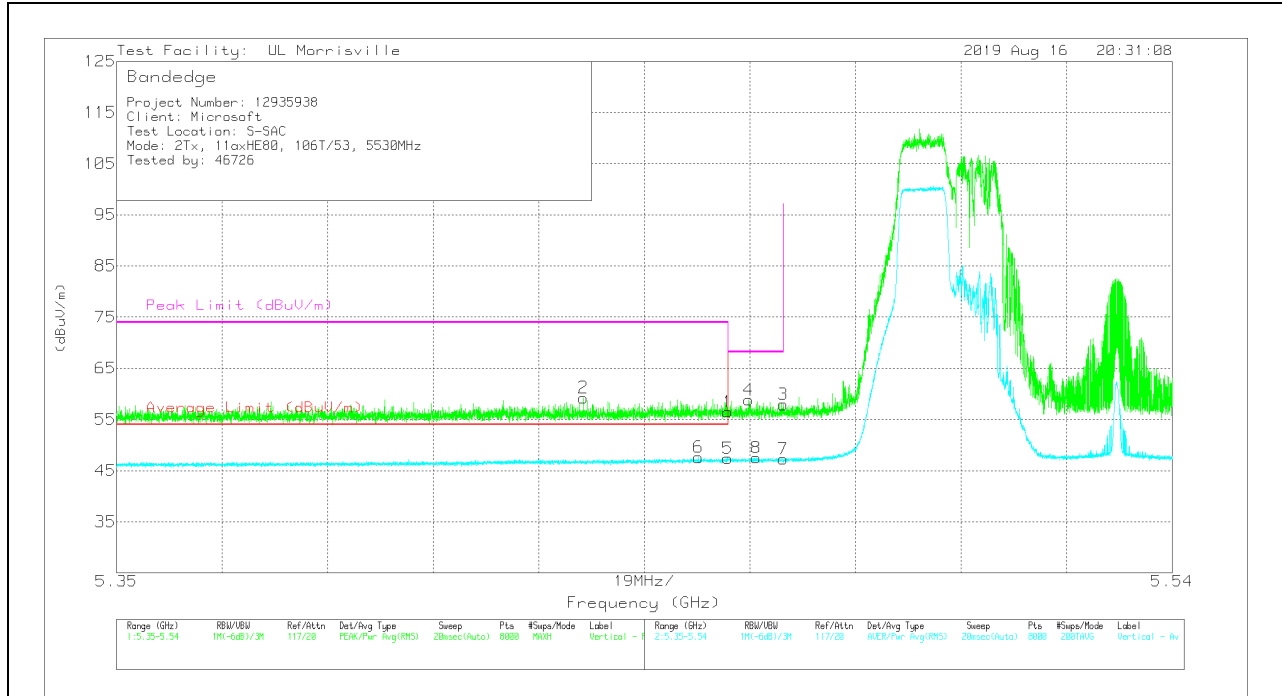

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	45.37	Pk	34.5	-23.4	56.47	-	-	74	-17.53	92	215	V
2	* ** 5.43401	48.14	Pk	34.5	-23.4	59.24	-	-	74	-14.76	92	215	V
5	* ** 5.45998	36.26	RMS	34.5	-23.4	47.36	54	-6.64	-	-	92	215	V
6	* ** 5.45473	36.49	RMS	34.5	-23.4	47.59	54	-6.41	-	-	92	215	V
4	5.46375	47.74	Pk	34.5	-23.4	58.84	-	-	68.2	-9.36	92	215	V
8	5.46516	36.42	RMS	34.5	-23.4	47.52	-	-	-	-	92	215	V
3	5.46998	46.91	Pk	34.5	-23.5	57.91	-	-	68.2	-10.29	92	215	V
7	5.46998	36.29	RMS	34.5	-23.5	47.29	-	-	-	-	92	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 60

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

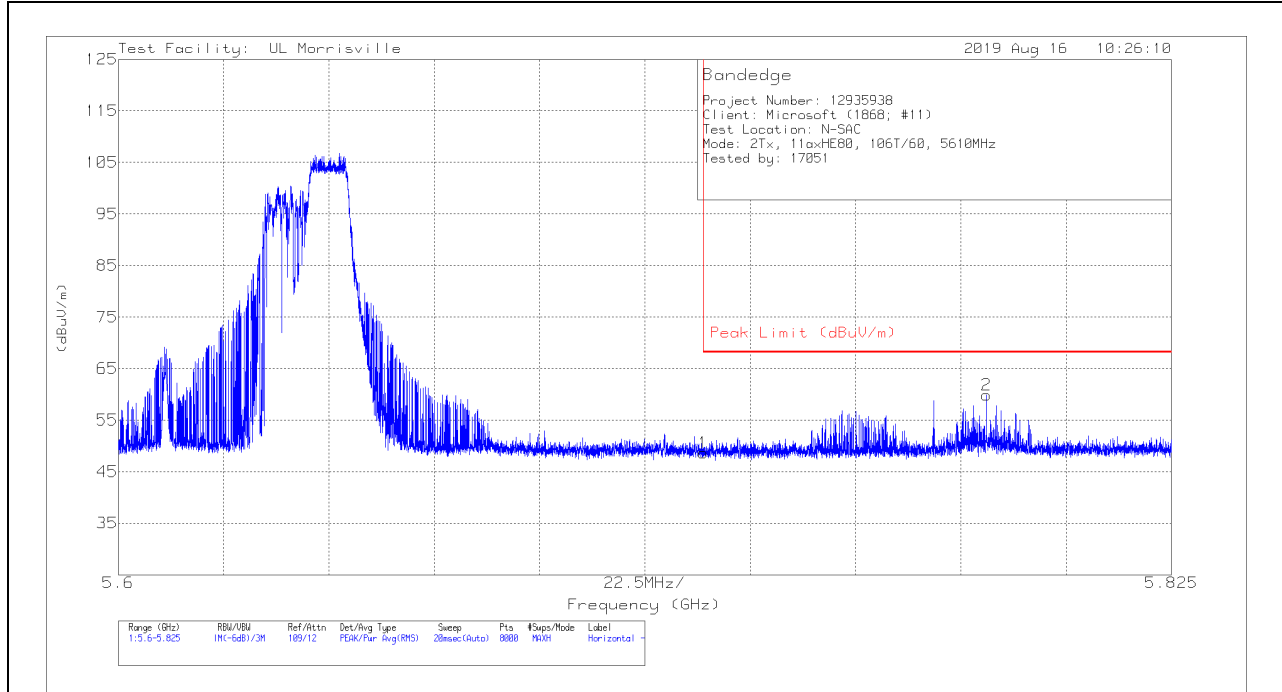

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	36.91	Pk	34.6	-22.9	48.61	68.2	-19.59	259	322	H
2	5.78551	47.85	Pk	34.7	-22.7	59.85	68.2	-8.35	259	322	H

Pk - Peak detector

VERTICAL RESULT

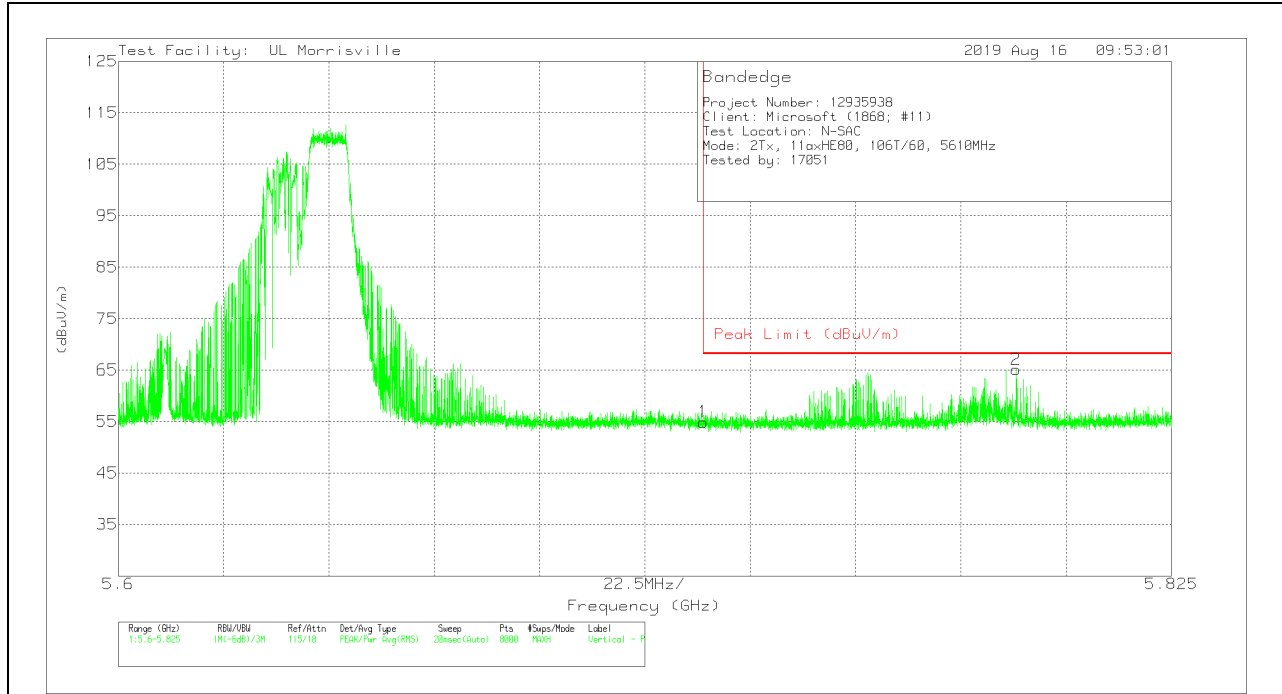


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	43.22	Pk	34.6	-22.9	54.92	68.2	-13.28	285	241	V
2	5.79184	53.15	Pk	34.7	-22.7	65.15	68.2	-3.05	285	241	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

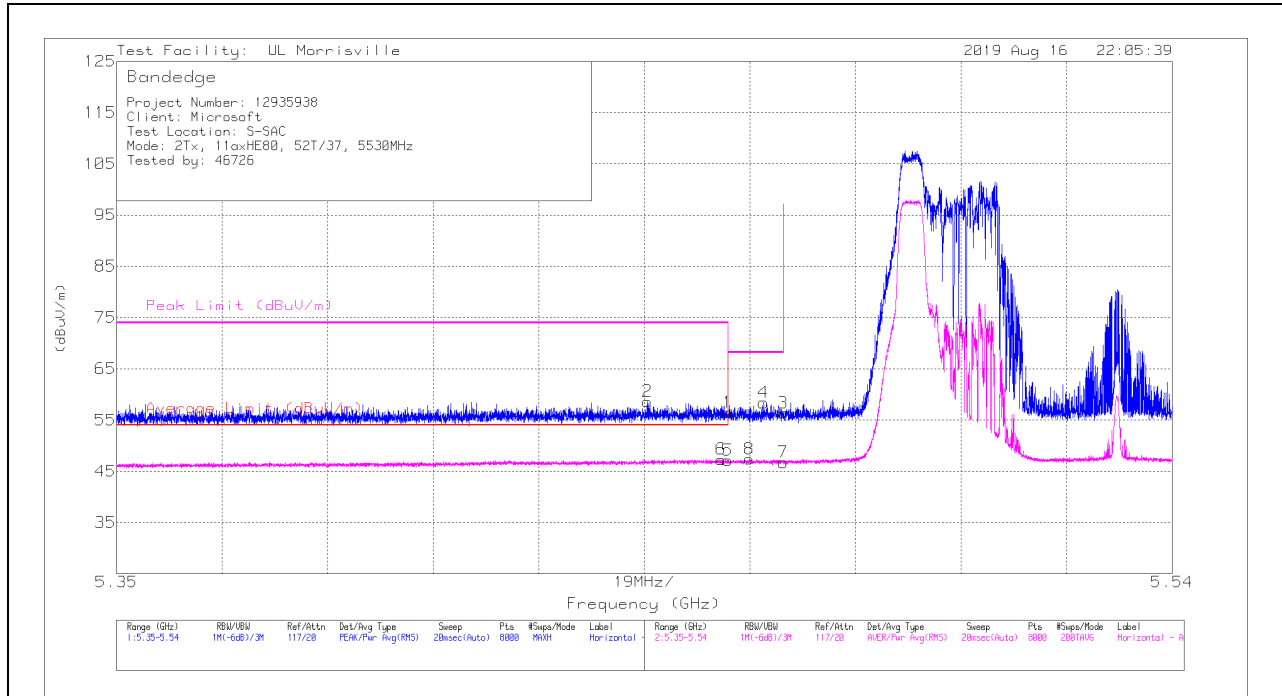

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	45.35	Pk	34.5	-23.4	56.45	-	-	74	-17.55	11	386	H
2	* ** 5.44558	47.52	Pk	34.5	-23.4	58.62	-	-	74	-15.38	11	386	H
5	* ** 5.45998	36.02	RMS	34.5	-23.4	47.12	54	-6.88	-	-	11	386	H
6	* ** 5.45877	36.23	RMS	34.5	-23.4	47.33	54	-6.67	-	-	11	386	H
8	5.46387	36.3	RMS	34.5	-23.4	47.4	-	-	-	-	11	386	H
4	5.46641	47.41	Pk	34.5	-23.5	58.41	-	-	68.2	-9.79	11	386	H
3	5.46998	45.35	Pk	34.5	-23.5	56.35	-	-	68.2	-11.85	11	386	H
7	5.46998	35.73	RMS	34.5	-23.5	46.73	-	-	-	-	11	386	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

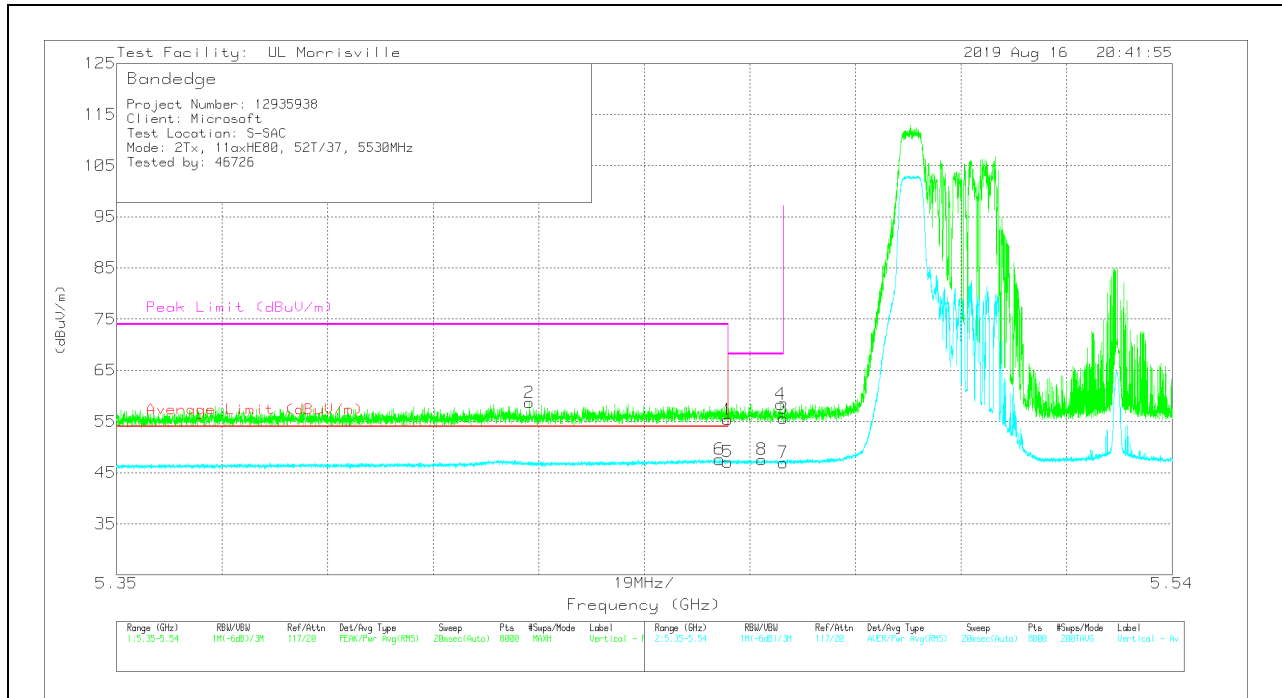


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	44.27	Pk	34.5	-23.4	55.37	-	-	74	-18.63	15	267	V
2	* ** 5.42428	47.68	Pk	34.4	-23.4	58.68	-	-	74	-15.32	15	267	V
5	* ** 5.45998	35.99	RMS	34.5	-23.4	47.09	54	-6.91	-	-	15	267	V
6	* ** 5.4585	36.49	RMS	34.5	-23.4	47.59	54	-6.41	-	-	15	267	V
8	5.46615	36.56	RMS	34.5	-23.5	47.56	-	-	-	-	15	267	V
4	5.4695	47.38	Pk	34.5	-23.5	58.38	-	-	68.2	-9.82	15	267	V
3	5.46998	44.65	Pk	34.5	-23.5	55.65	-	-	68.2	-12.55	15	267	V
7	5.46998	35.95	RMS	34.5	-23.5	46.95	-	-	-	-	15	267	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 52

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

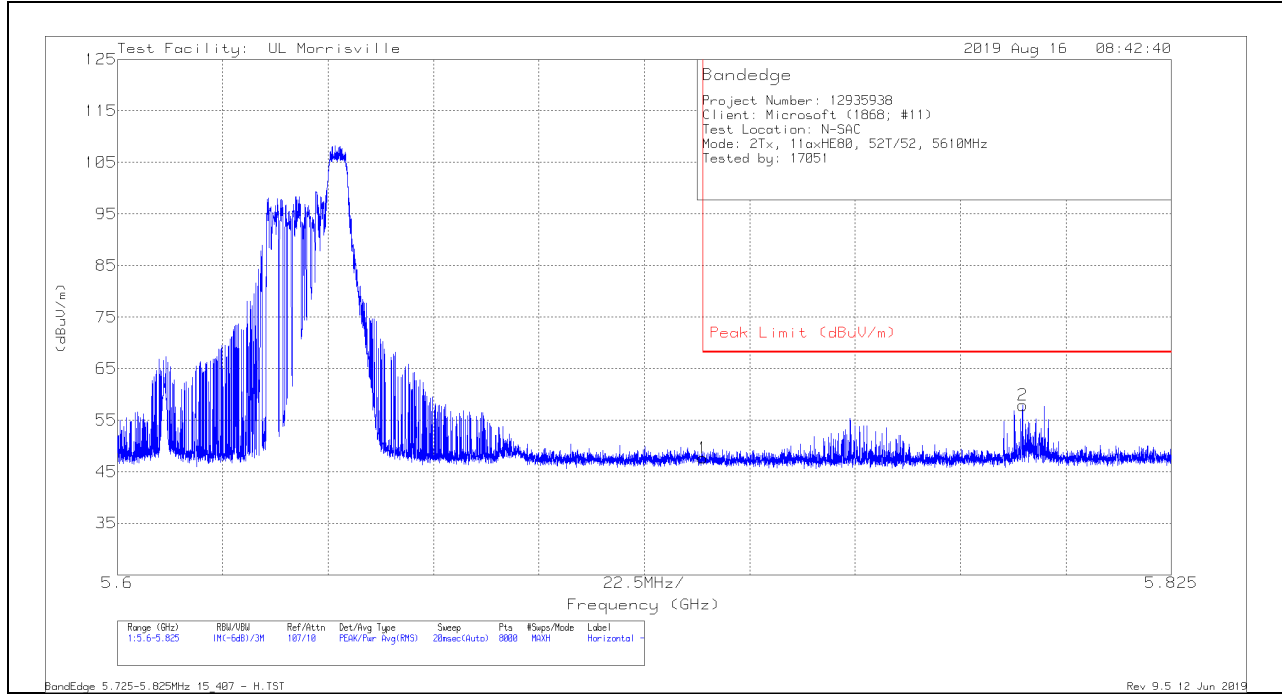

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	35.99	Pk	34.6	-22.9	47.69	68.2	-20.51	259	375	H
2	5.79322	45.87	Pk	34.7	-22.7	57.87	68.2	-10.33	259	375	H

Pk - Peak detector

VERTICAL RESULT

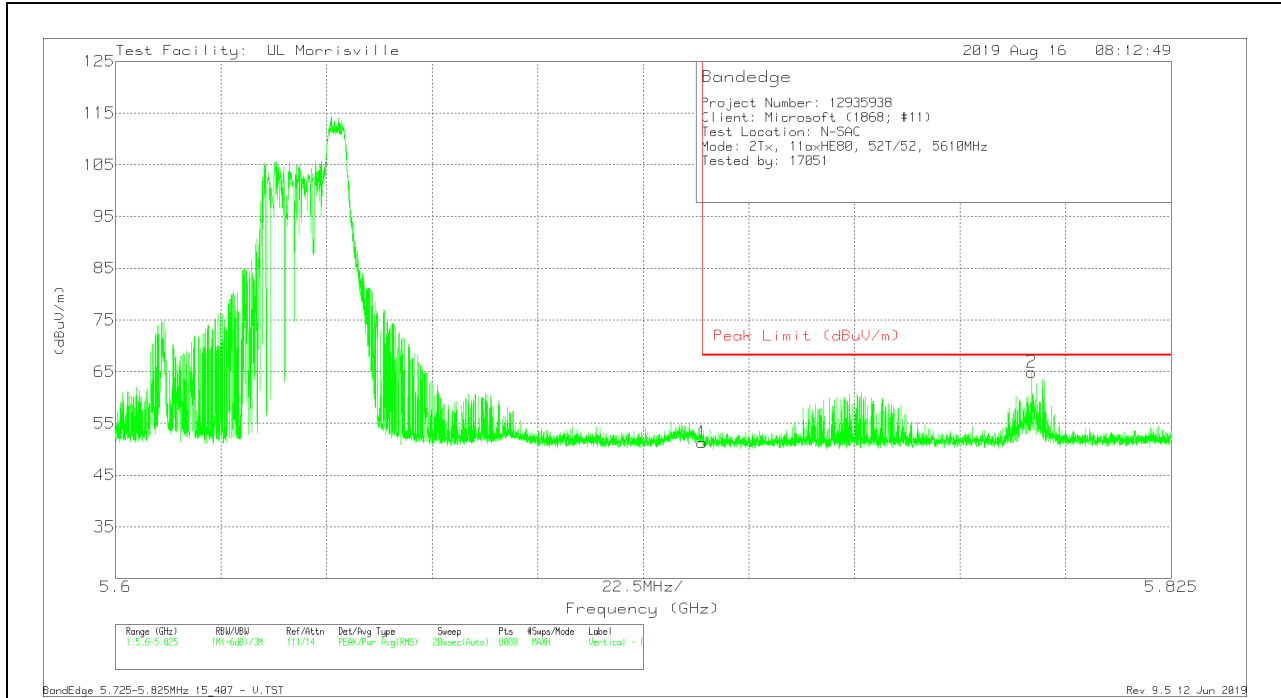


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.63	Pk	34.6	-22.9	51.33	68.2	-16.87	289	251	V
2	5.79522	52.94	Pk	34.7	-22.7	64.94	68.2	-3.26	289	251	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

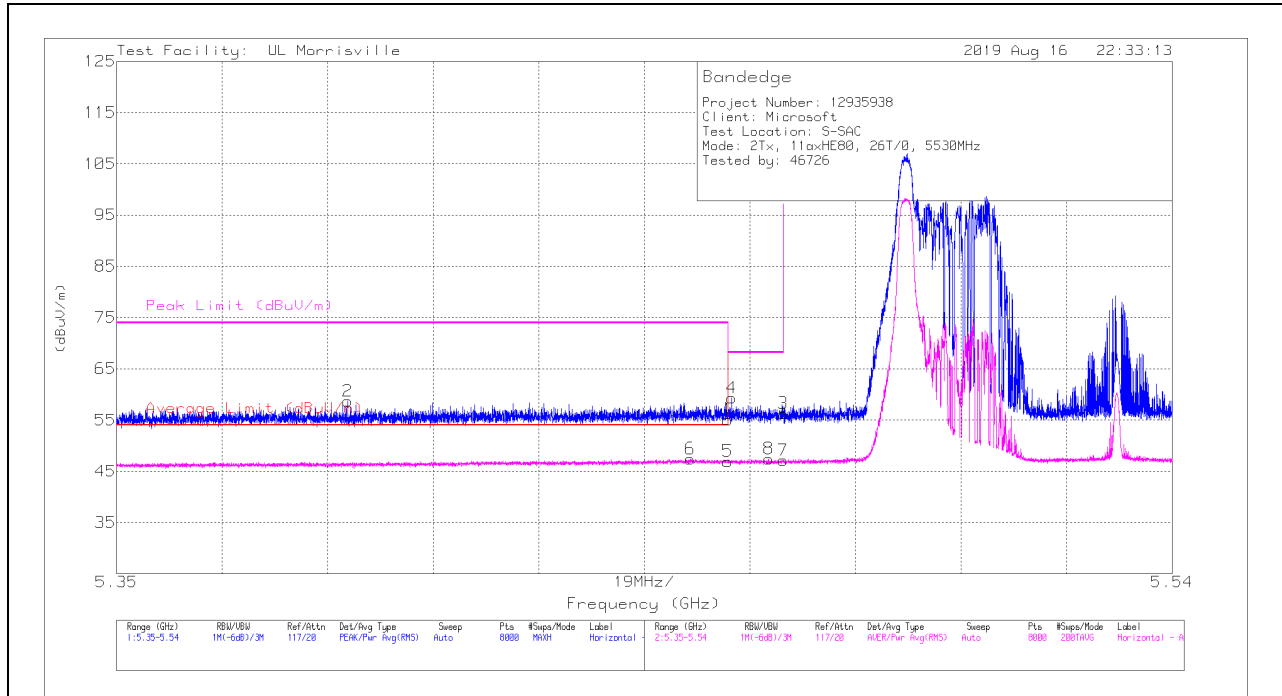

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	43.97	Pk	34.5	-23.4	55.07	-	-	74	-18.93	24	362	H
2	* ** 5.39162	47.56	Pk	34.4	-23.3	58.66	-	-	74	-15.34	24	362	H
5	* ** 5.45998	35.85	RMS	34.5	-23.4	46.95	54	-7.05	-	-	24	362	H
6	* ** 5.45325	36.23	RMS	34.5	-23.3	47.43	54	-6.57	-	-	24	362	H
4	5.46069	48.24	Pk	34.5	-23.4	59.34	-	-	68.2	-8.86	24	362	H
8	5.46734	36.44	RMS	34.5	-23.5	47.44	-	-	-	-	24	362	H
3	5.46998	45.28	Pk	34.5	-23.5	56.28	-	-	68.2	-11.92	24	362	H
7	5.46998	36.13	RMS	34.5	-23.5	47.13	-	-	-	-	24	362	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

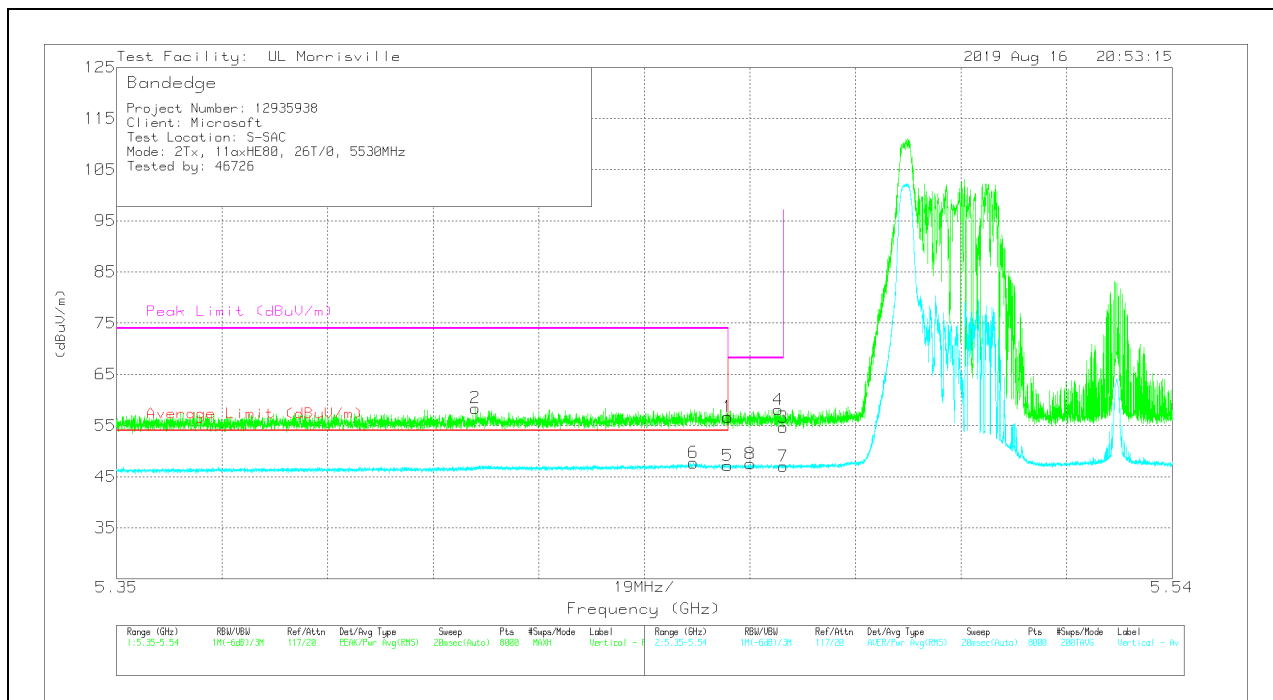

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45998	45.58	Pk	34.5	-23.4	56.68	-	-	74	-17.32	42	311	V
2	** * 5.41458	47.39	Pk	34.4	-23.4	58.39	-	-	74	-15.61	42	311	V
5	** * 5.45998	36.06	RMS	34.5	-23.4	47.16	54	-6.84	-	-	42	311	V
6	** * 5.45385	36.52	RMS	34.5	-23.3	47.72	54	-6.28	-	-	42	311	V
8	5.46404	36.39	RMS	34.5	-23.4	47.49	-	-	-	-	42	311	V
4	5.46903	47.07	Pk	34.5	-23.5	58.07	-	-	68.2	-10.13	42	311	V
3	5.46998	43.61	Pk	34.5	-23.5	54.61	-	-	68.2	-13.59	42	311	V
7	5.46998	36.05	RMS	34.5	-23.5	47.05	-	-	-	-	42	311	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 36

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

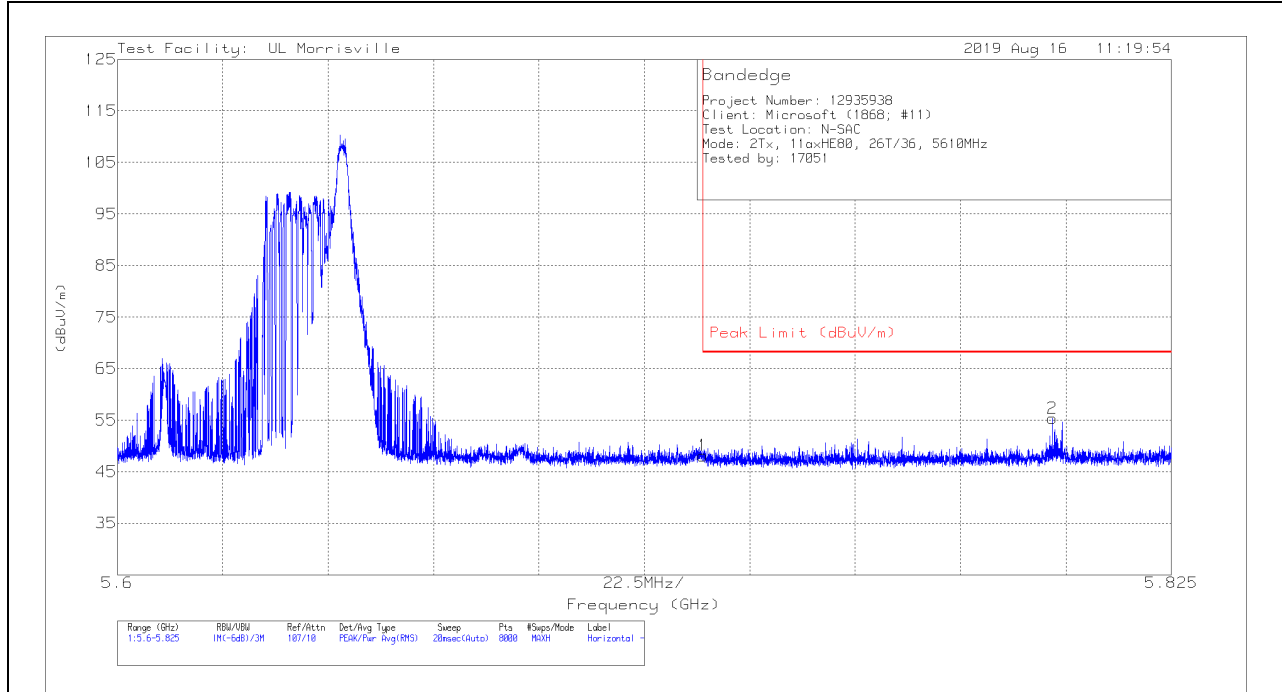

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	36.4	Pk	34.6	-22.9	48.1	68.2	-20.1	7	375	H
2	5.7996	43.31	Pk	34.7	-22.7	55.31	68.2	-12.89	7	375	H

Pk - Peak detector

VERTICAL RESULT

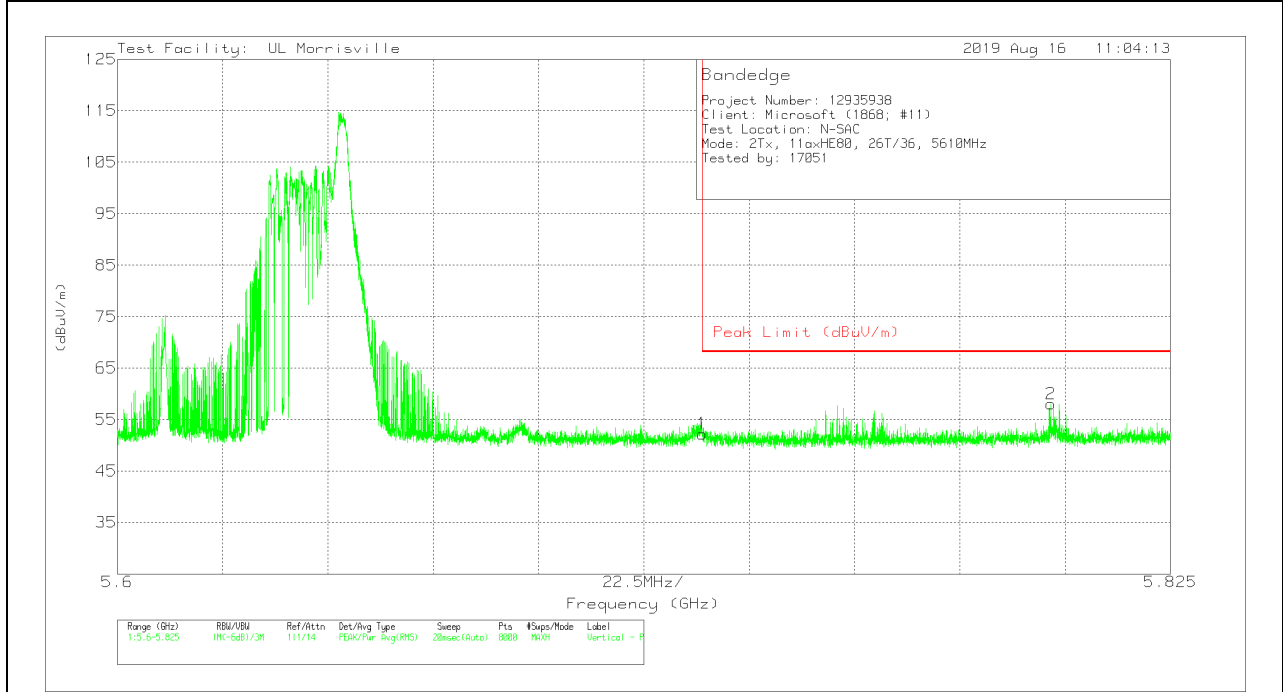

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.54	Pk	34.6	-22.9	52.24	68.2	-15.96	279	249	V
2	5.79941	46.06	Pk	34.7	-22.7	58.06	68.2	-10.14	279	249	V


Pk - Peak detector

10.1.4. TX ABOVE 1 GHz 802.11ax HE160 MODE IN THE 5.6 GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE – SU MODE

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

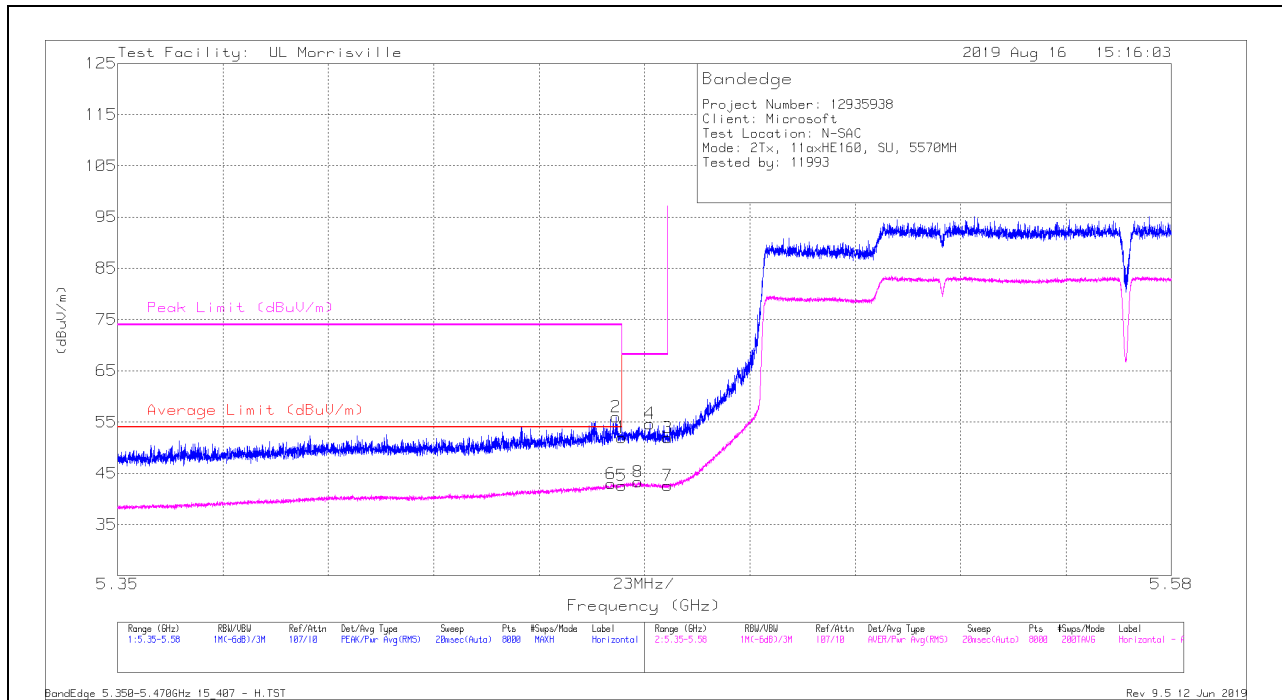

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	DCCF dBm	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	40.58	Pk	34.4	-23	0	51.98	-	-	74	-22.02	240	313	H
2	*** 5.45881	44.56	Pk	34.4	-23	0	55.96	-	-	74	-18.04	240	313	H
5	*** 5.45998	31.17	RMS	34.4	-23	0.09	42.66	54	-11.34	-	-	240	313	H
6	*** 5.45774	31.58	RMS	34.4	-23	0.09	43.07	54	-10.93	-	-	240	313	H
8	5.46355	31.95	RMS	34.4	-23	0.09	43.44	-	-	-	-	240	313	H
4	5.46614	43.29	Pk	34.4	-23	0	54.69	-	-	68.2	-13.51	240	313	H
3	5.46999	40.43	Pk	34.4	-22.9	0	51.93	-	-	68.2	-16.27	240	313	H
7	5.46999	31.07	RMS	34.4	-22.9	0.09	42.66	-	-	-	-	240	313	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

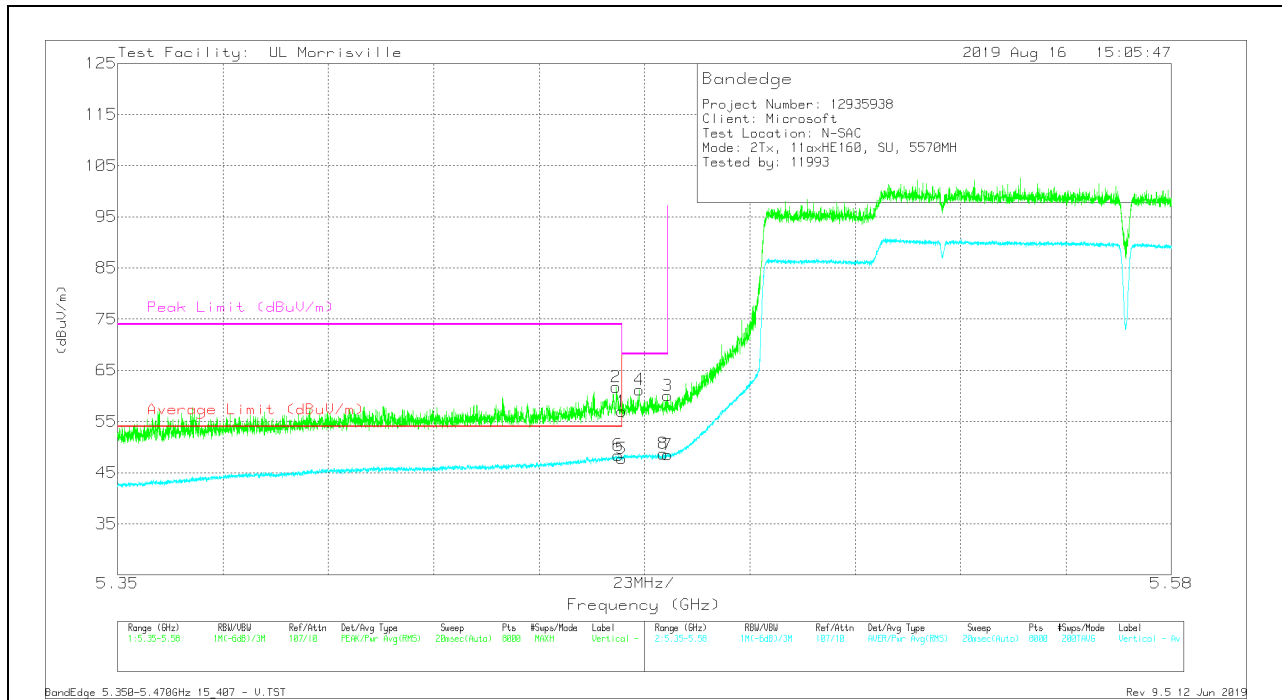


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	DCCF dBm	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	45.59	Pk	34.4	-23	0	56.99	-	-	74	-17.01	350	286	V
2	* ** 5.45878	50.33	Pk	34.4	-23	0	61.73	-	-	74	-12.27	350	286	V
5	* ** 5.45998	36.36	RMS	34.4	-23	0.09	47.85	54	-6.15	-	-	350	286	V
6	* ** 5.45927	37.02	RMS	34.4	-23	0.09	48.51	54	-5.49	-	-	350	286	V
4	5.46387	49.79	Pk	34.4	-23	0	61.19	-	-	68.2	-7.01	350	286	V
8	5.46907	37.2	RMS	34.4	-22.9	0.09	48.79	-	-	-	-	350	286	V
3	5.46999	48.55	Pk	34.4	-22.9	0	60.05	-	-	68.2	-8.15	350	286	V
7	5.46999	37.01	RMS	34.4	-22.9	0.09	48.60	-	-	-	-	350	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)


HORIZONTAL RESULT

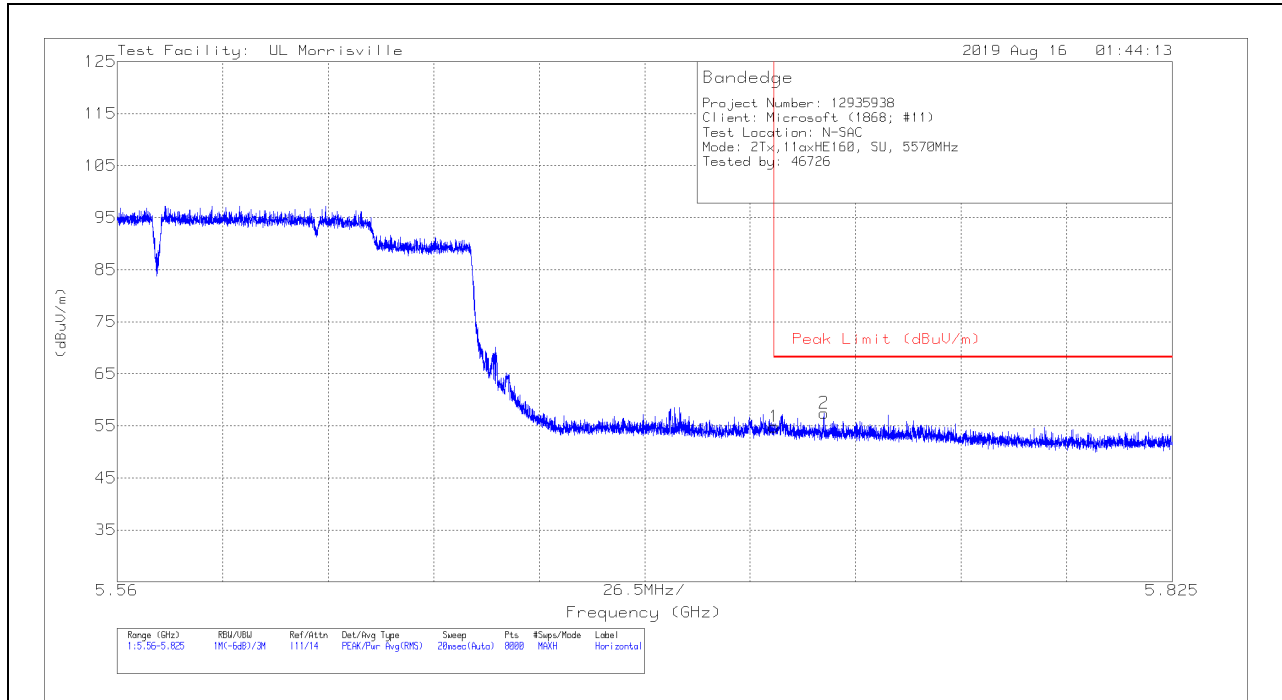

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	43.13	Pk	34.6	-22.9	54.83	68.2	-13.37	13	394	H
2	5.73751	45.55	Pk	34.7	-22.8	57.45	68.2	-10.75	13	394	H

Pk - Peak detector

VERTICAL RESULT

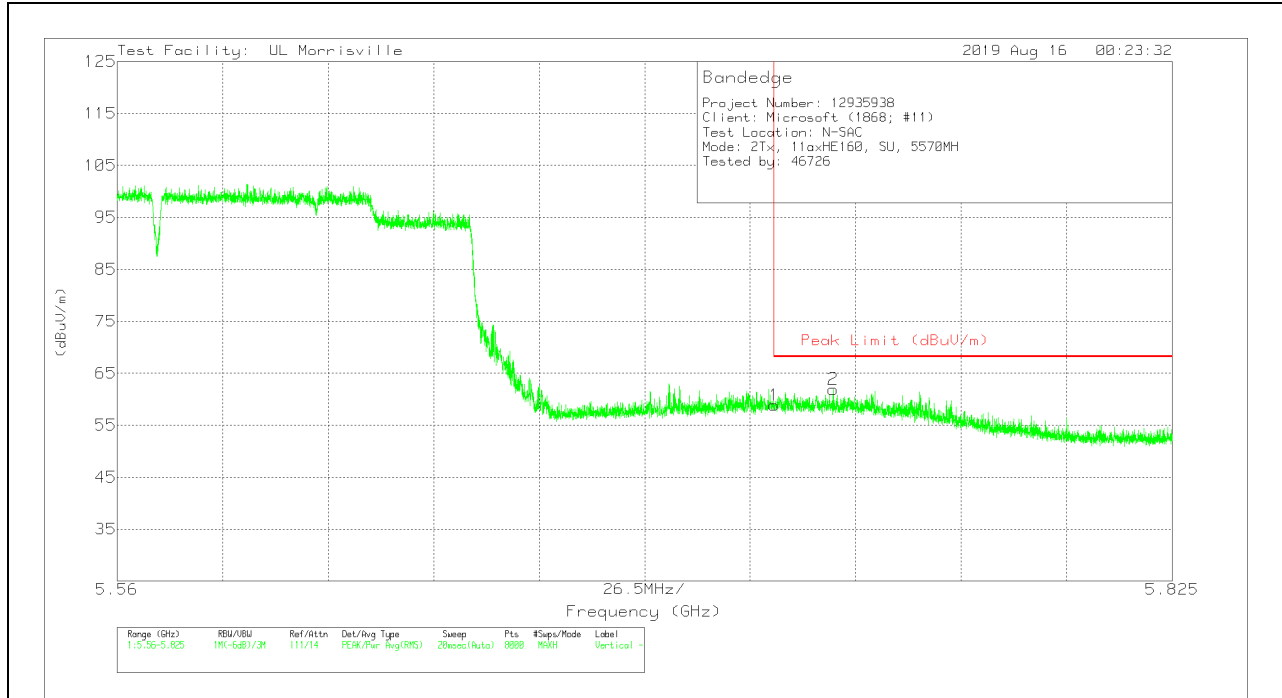


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	47.17	Pk	34.6	-22.9	58.87	68.2	-9.33	321	242	V
2	5.73986	50.04	Pk	34.7	-22.8	61.94	68.2	-6.26	321	242	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 2x996-Tones, RU Index 68

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

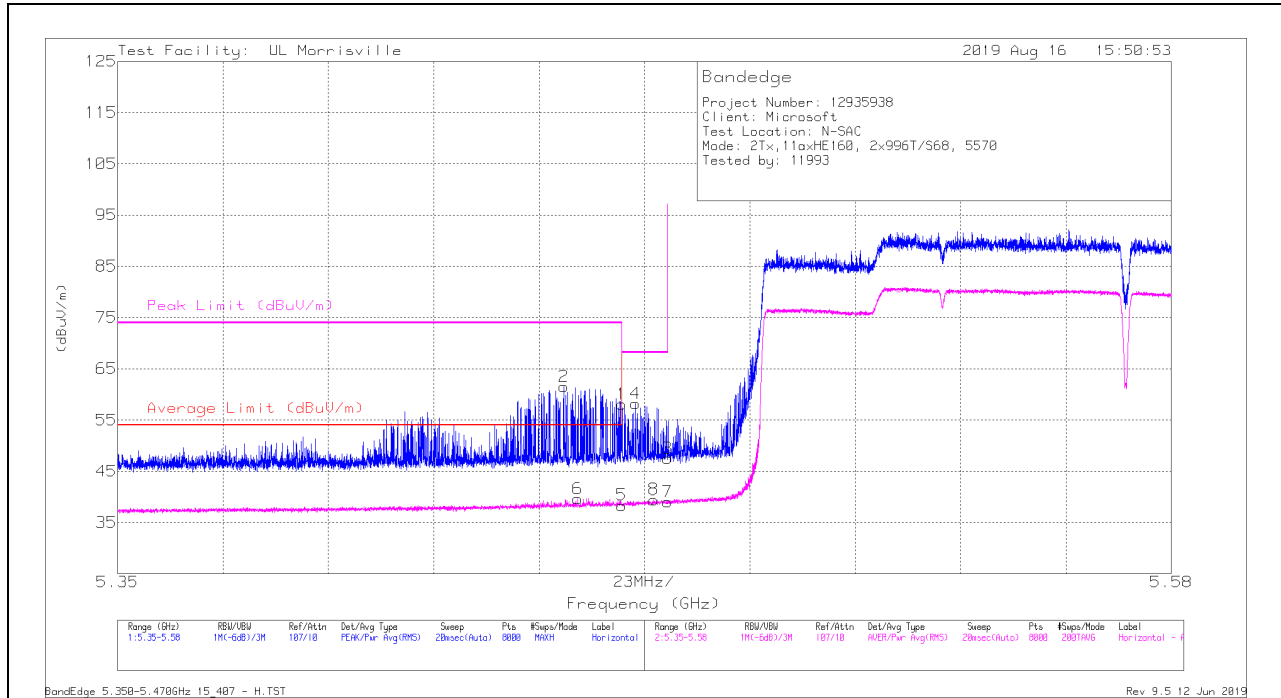

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45998	46.67	Pk	34.4	-23	58.07	-	-	74	-15.93	254	267	H
2	** * 5.44742	50.03	Pk	34.4	-22.9	61.53	-	-	74	-12.47	254	267	H
5	** * 5.45998	26.96	RMS	34.4	-23	38.36	54	-15.64	-	-	254	267	H
6	** * 5.45041	28.16	RMS	34.4	-22.9	39.66	54	-14.34	-	-	254	267	H
4	5.46303	46.81	Pk	34.4	-23	58.21	-	-	68.2	-9.99	254	267	H
8	5.46697	27.96	RMS	34.4	-22.9	39.46	-	-	-	-	254	267	H
3	5.46999	35.98	PK	34.4	-22.9	47.48	-	-	68.2	-20.72	254	267	H
7	5.46999	27.51	RMS	34.4	-22.9	39.01	-	-	-	-	254	267	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

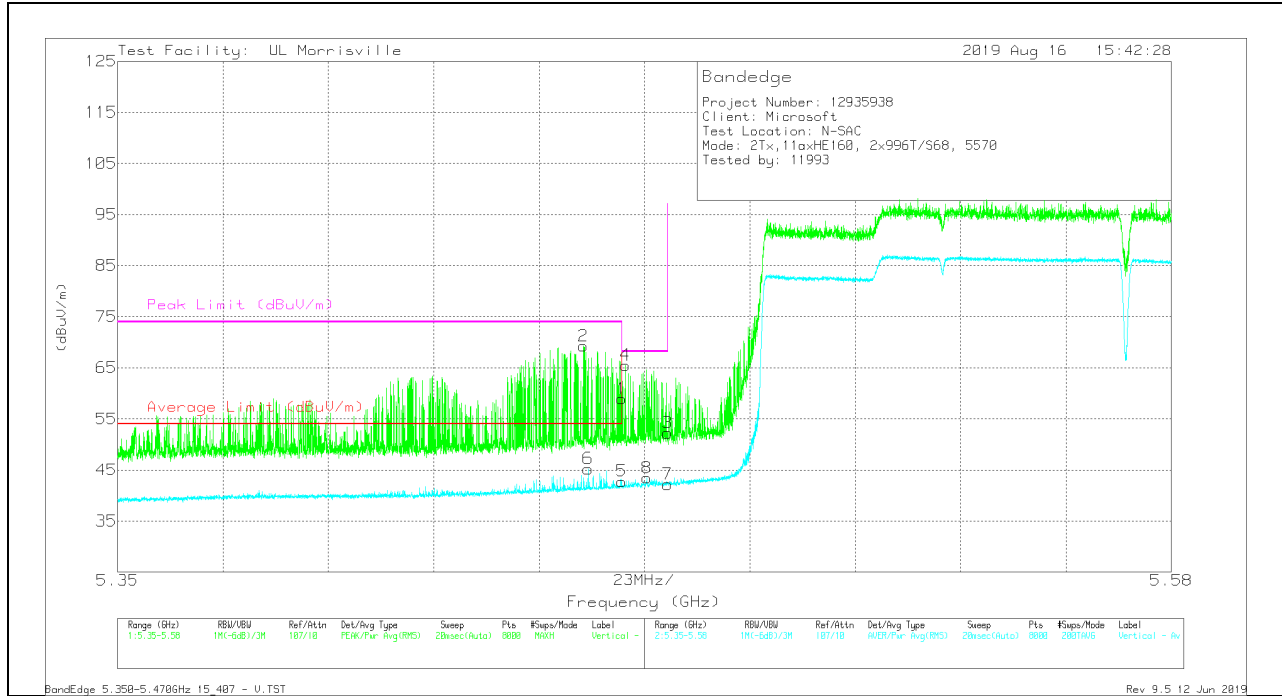


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 5.45162	57.76	Pk	34.4	-22.9	69.26	-	-	74	-4.74	340	253	V
6	* ** 5.45268	33.74	RMS	34.4	-22.9	45.24	54	-8.76	-	-	340	253	V
1	* ** 5.45998	47.51	Pk	34.4	-23	58.91	-	-	74	-15.09	340	253	V
5	* ** 5.45998	31.38	RMS	34.4	-23	42.78	54	-11.22	-	-	340	253	V
4	5.46085	54.11	Pk	34.4	-23	65.51	-	-	68.2	-2.69	340	253	V
8	5.46551	32.06	RMS	34.4	-23	43.46	-	-	-	-	340	253	V
3	5.46999	40.76	Pk	34.4	-22.9	52.26	-	-	68.2	-15.94	340	253	V
7	5.46999	30.68	RMS	34.4	-22.9	42.18	-	-	-	-	340	253	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)


HORIZONTAL RESULT

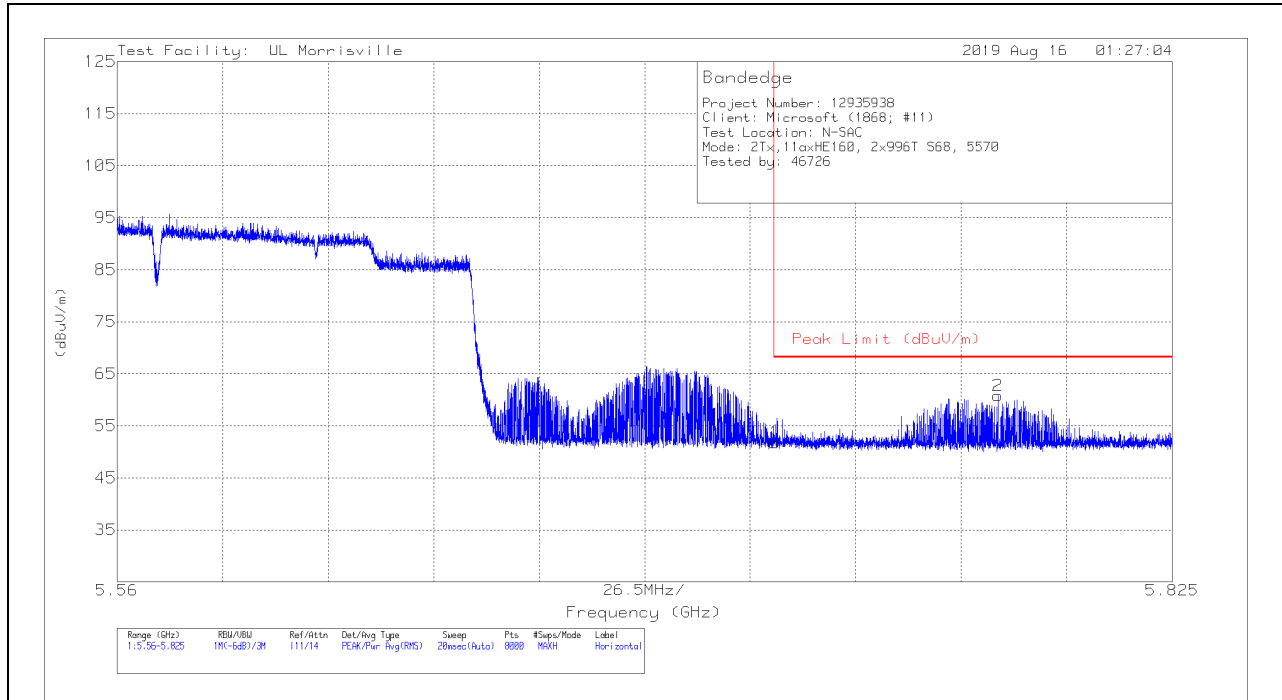

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	40.08	Pk	34.6	-22.9	51.78	68.2	-16.42	4	398	H
2	5.7812	48.79	Pk	34.7	-22.7	60.79	68.2	-7.41	4	398	H

Pk - Peak detector

VERTICAL RESULT

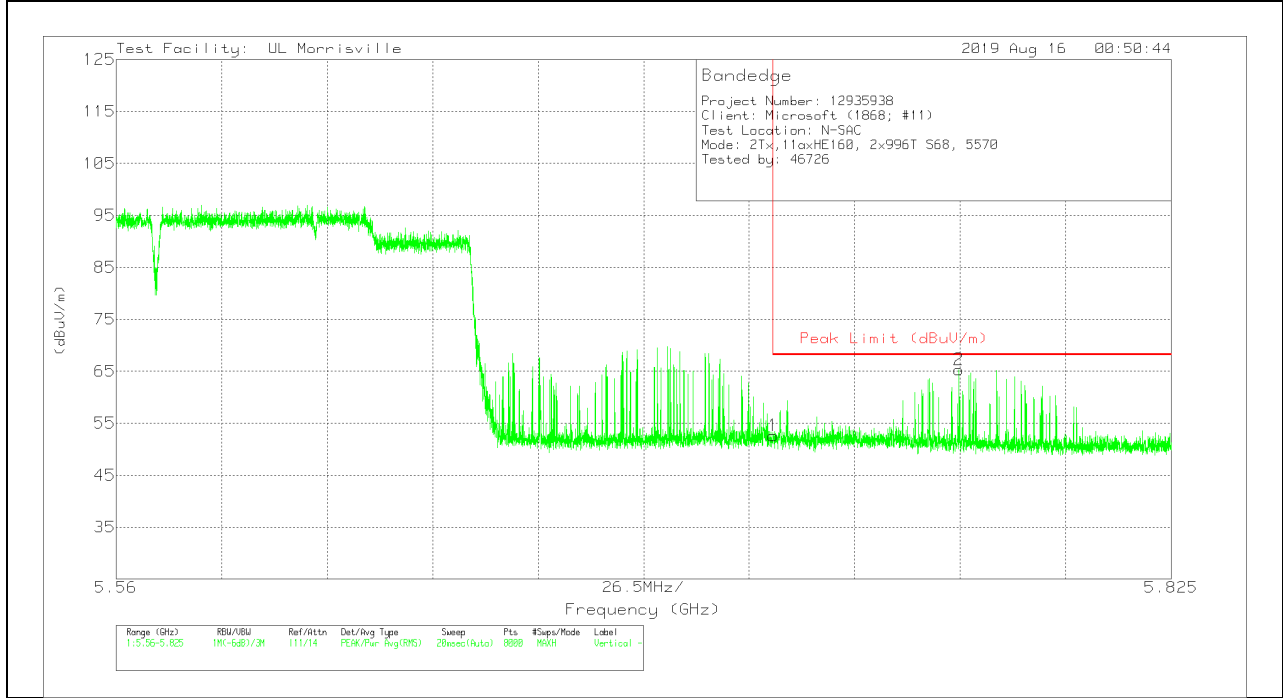


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	40.91	Pk	34.6	-22.9	52.61	68.2	-15.59	4	228	V
2	5.7716	53.41	Pk	34.7	-22.8	65.31	68.2	-2.89	4	228	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

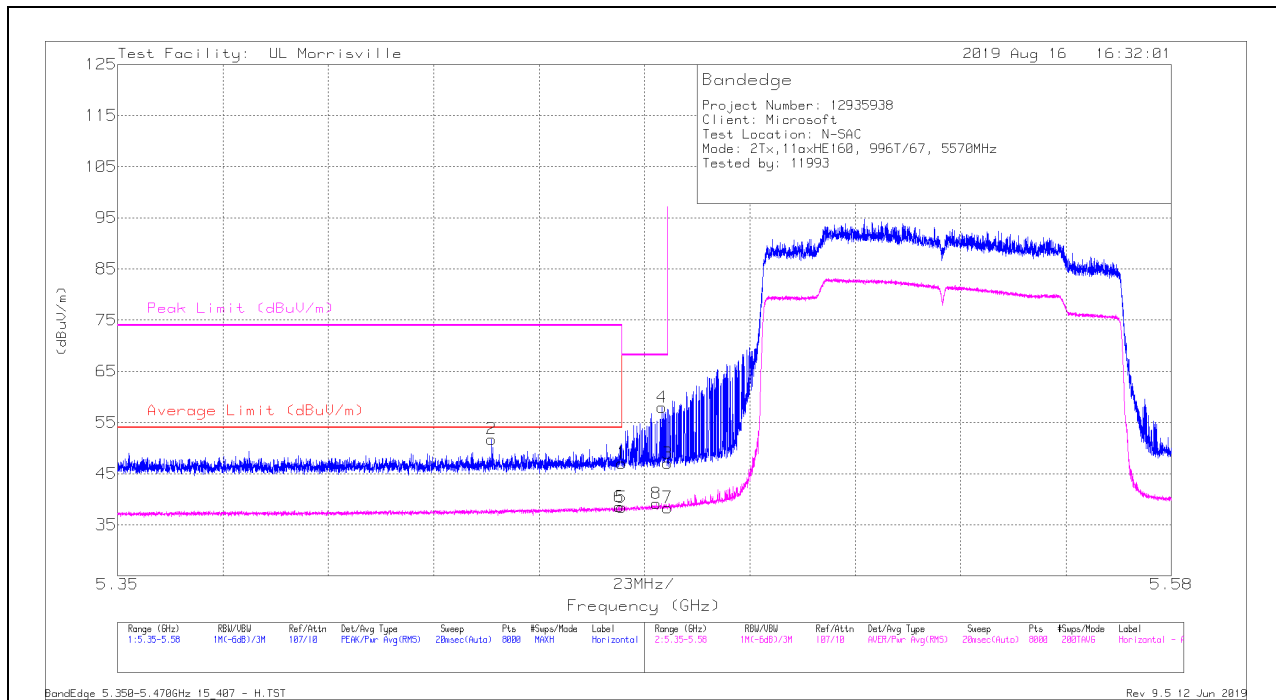

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	35.68	Pk	34.4	-23	47.08	-	-	74	-26.92	73	388	H
2	* ** 5.43158	40.36	Pk	34.4	-23	51.76	-	-	74	-22.24	73	388	H
5	* ** 5.45998	27.04	RMS	34.4	-23	38.44	54	-15.56	-	-	73	388	H
6	* ** 5.4595	27.14	RMS	34.4	-23	38.54	54	-15.46	-	-	73	388	H
8	5.4676	27.66	RMS	34.4	-22.9	39.16	-	-	-	-	73	388	H
4	5.46878	46.48	Pk	34.4	-22.9	57.98	-	-	68.2	-10.22	73	388	H
3	5.46999	35.5	Pk	34.4	-22.9	47	-	-	68.2	-21.2	73	388	H
7	5.46999	26.83	RMS	34.4	-22.9	38.33	-	-	-	-	73	388	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

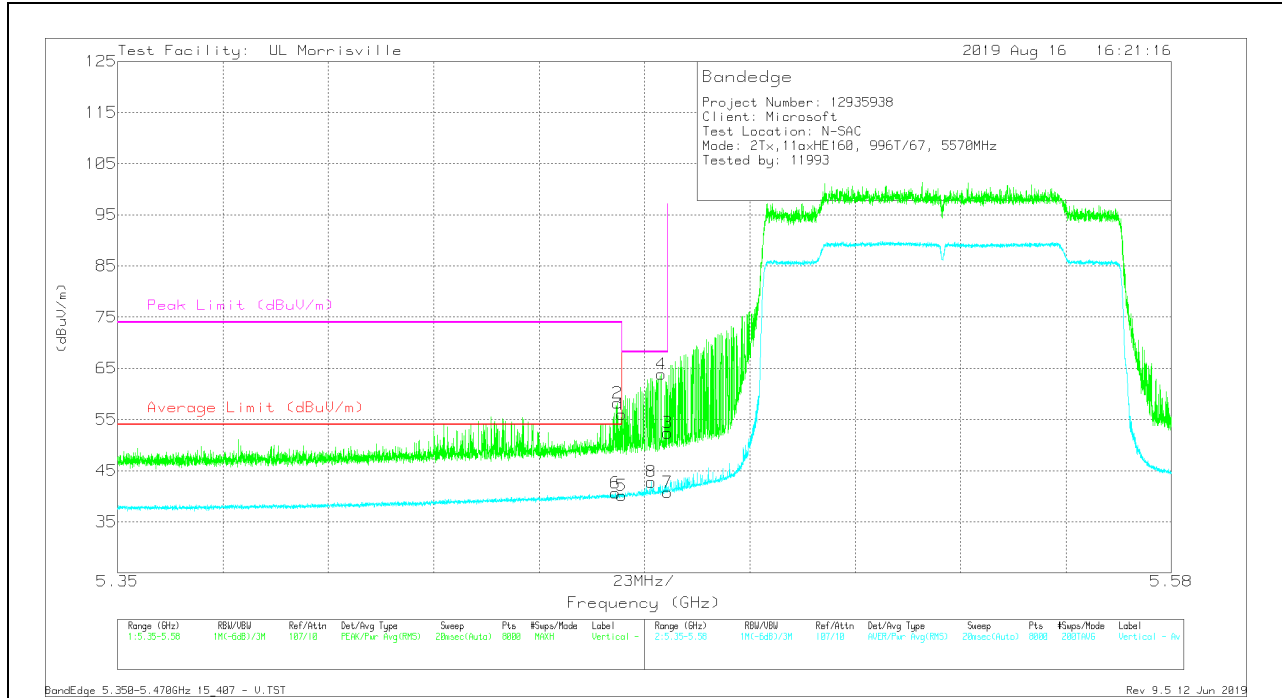


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	44.61	Pk	34.4	-23	56.01	-	-	74	-17.99	317	316	V
2	* ** 5.45912	46.82	Pk	34.4	-23	58.22	-	-	74	-15.78	317	316	V
5	* ** 5.45998	28.74	RMS	34.4	-23	40.14	54	-13.86	-	-	317	316	V
6	* ** 5.45863	29.25	RMS	34.4	-23	40.65	54	-13.35	-	-	317	316	V
8	5.46643	31.4	RMS	34.4	-23	42.8	-	-	-	-	317	316	V
4	5.46867	52.33	Pk	34.4	-22.9	63.83	-	-	68.2	-4.37	317	316	V
3	5.46999	40.88	Pk	34.4	-22.9	52.38	-	-	68.2	-15.82	317	316	V
7	5.46999	29.23	RMS	34.4	-22.9	40.73	-	-	-	-	317	316	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index S67

BANDEDGE (MID CHANNEL HIGH EDGE)


HORIZONTAL RESULT

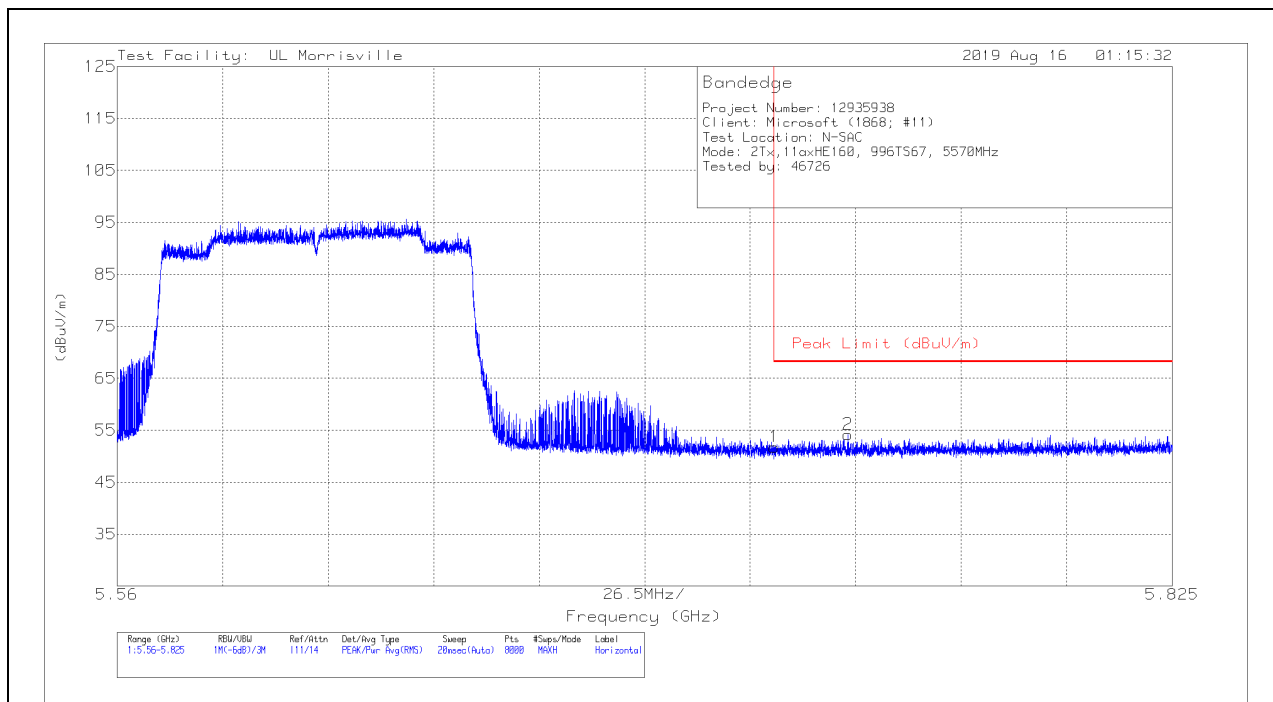

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	40.1	Pk	34.6	-22.9	51.8	68.2	-16.4	260	377	H
2	5.7436	42.28	Pk	34.7	-22.8	54.18	68.2	-14.02	260	377	H

Pk - Peak detector

VERTICAL RESULT

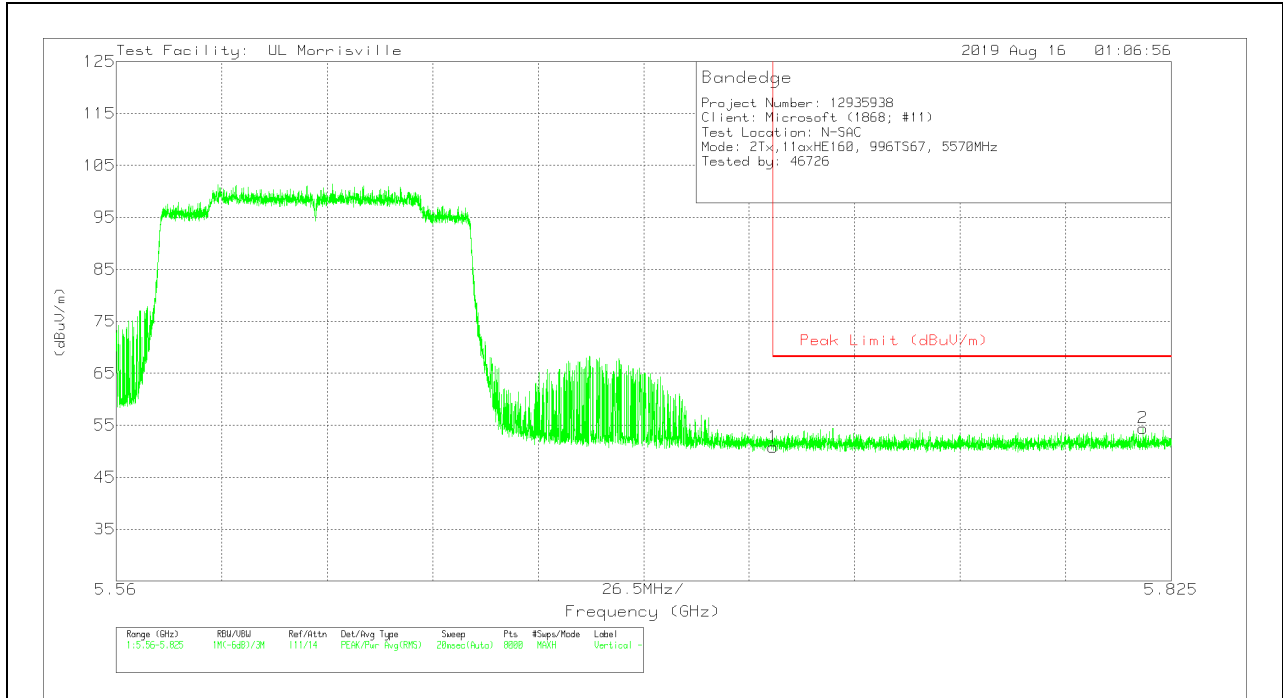


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	39.11	Pk	34.6	-22.9	50.81	68.2	-17.39	17	244	V
2	5.81791	42.25	Pk	34.8	-22.6	54.45	68.2	-13.75	17	244	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

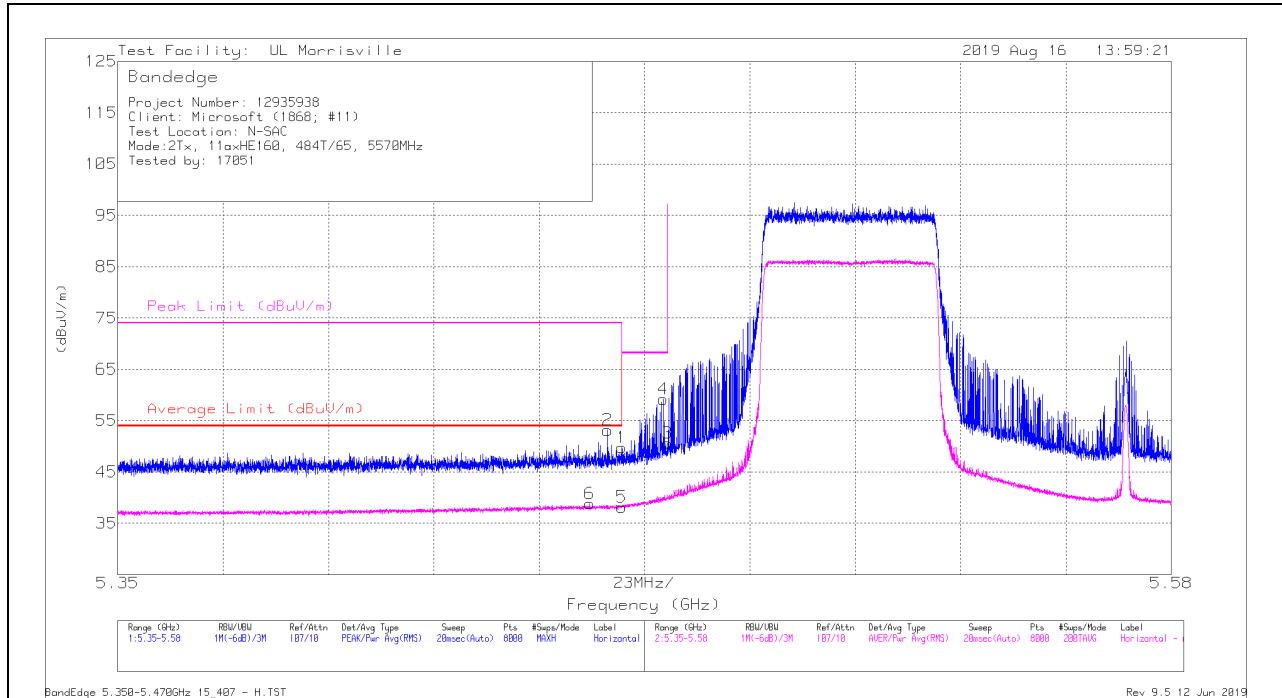

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	38.38	Pk	34.4	-23	49.78	-	-	74	-24.22	249	268	H
2	*** 5.45691	41.75	Pk	34.4	-23	53.15	-	-	74	-20.85	249	268	H
5	*** 5.45998	26.75	RMS	34.4	-23	38.15	54	-15.85	-	-	249	268	H
6	*** 5.453	27.33	RMS	34.4	-22.9	38.83	54	-15.17	-	-	249	268	H
4	5.46907	47.67	Pk	34.4	-22.9	59.17	-	-	68.2	-9.03	249	268	H
3	5.46999	39.09	Pk	34.4	-22.9	50.59	-	-	68.2	-17.61	249	268	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

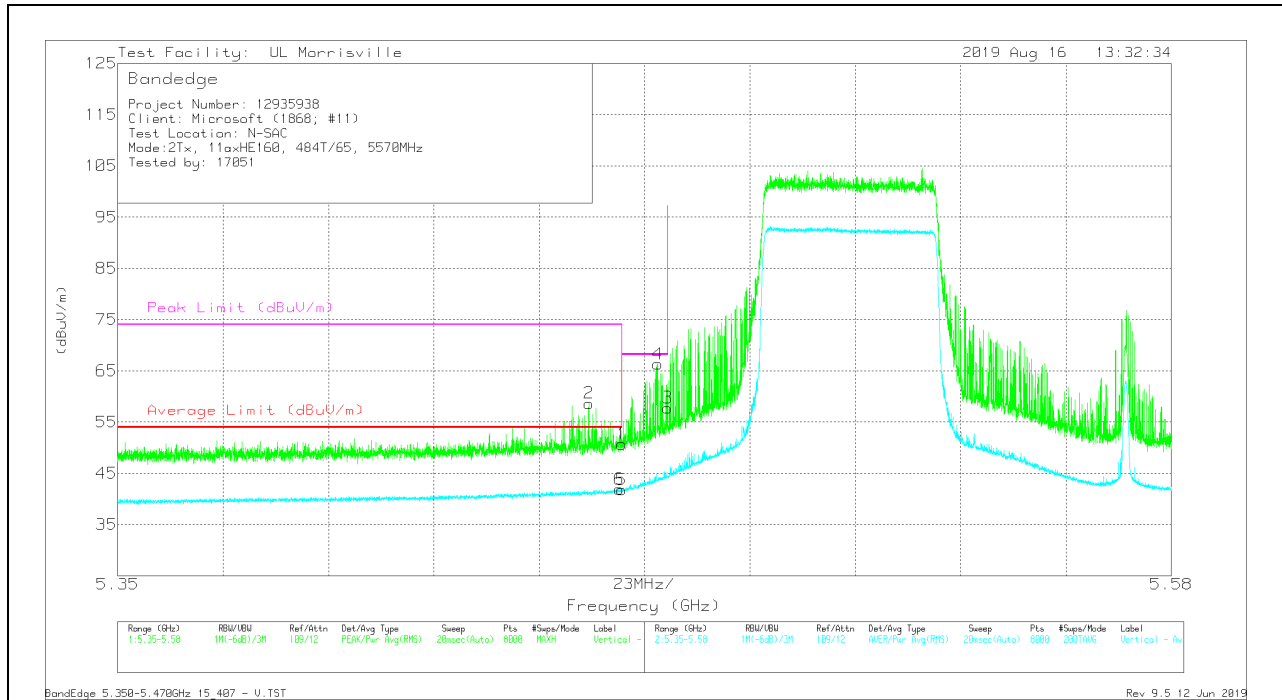


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 5.45282	47.16	Pk	34.4	-22.9	58.66	-	-	74	-15.34	302	286	V
6	** 5.45944	30.51	RMS	34.4	-23	41.91	54	-12.09	-	-	302	286	V
1	*** 5.45998	39.3	Pk	34.4	-23	50.7	-	-	74	-23.3	302	286	V
5	*** 5.45998	30.38	RMS	34.4	-23	41.78	54	-12.22	-	-	302	286	V
4	5.46789	54.82	Pk	34.4	-22.9	66.32	-	-	68.2	-1.88	302	286	V
3	5.46999	46.28	Pk	34.4	-22.9	57.78	-	-	68.2	-10.42	302	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index S66

BANDEDGE (MID CHANNEL HIGH EDGE)


HORIZONTAL RESULT

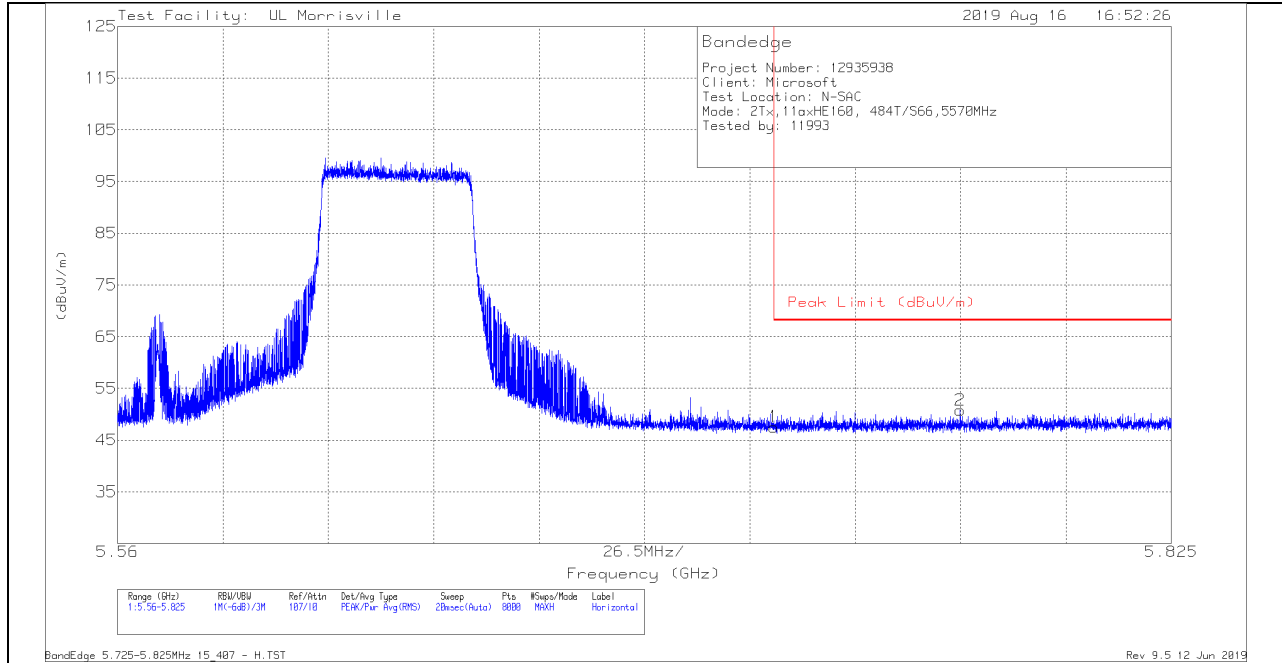

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	35.86	Pk	34.6	-22.9	47.56	68.2	-20.64	258	359	H
2	5.77189	38.86	Pk	34.7	-22.8	50.76	68.2	-17.44	258	359	H

Pk - Peak detector

VERTICAL RESULT

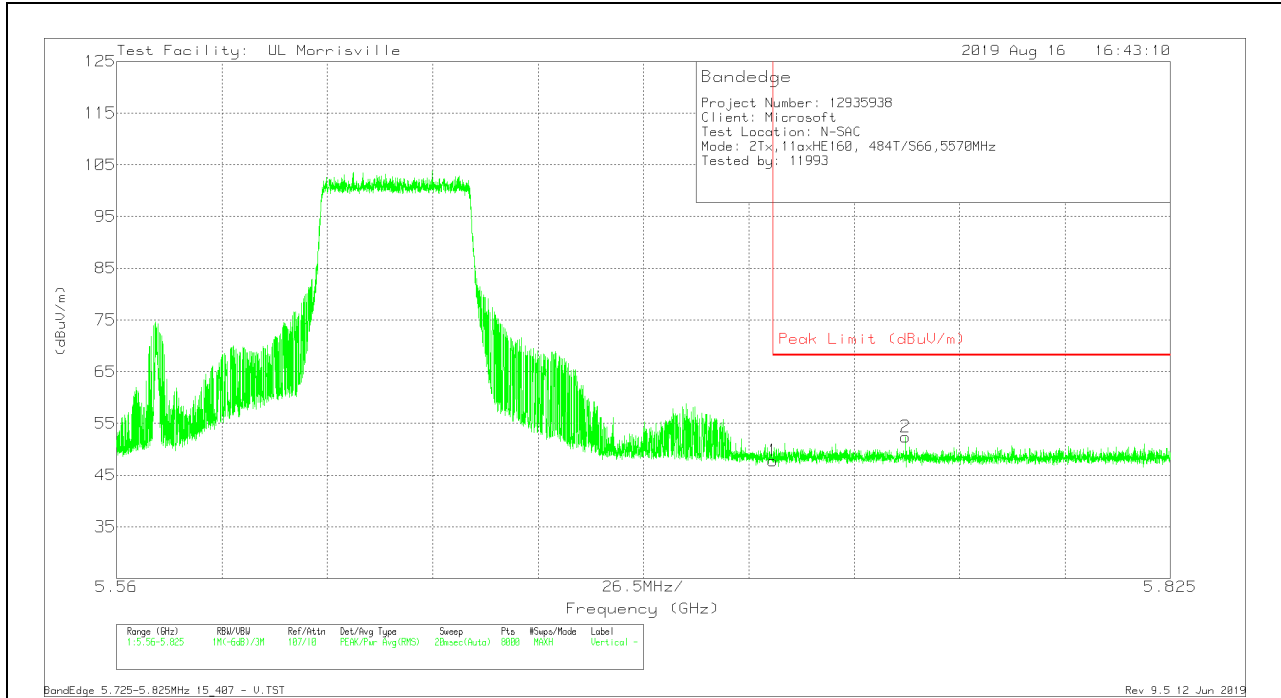


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	36.09	Pk	34.6	-22.9	47.79	68.2	-20.41	8	208	V
2	5.75838	40.51	Pk	34.7	-22.8	52.41	68.2	-15.79	8	208	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

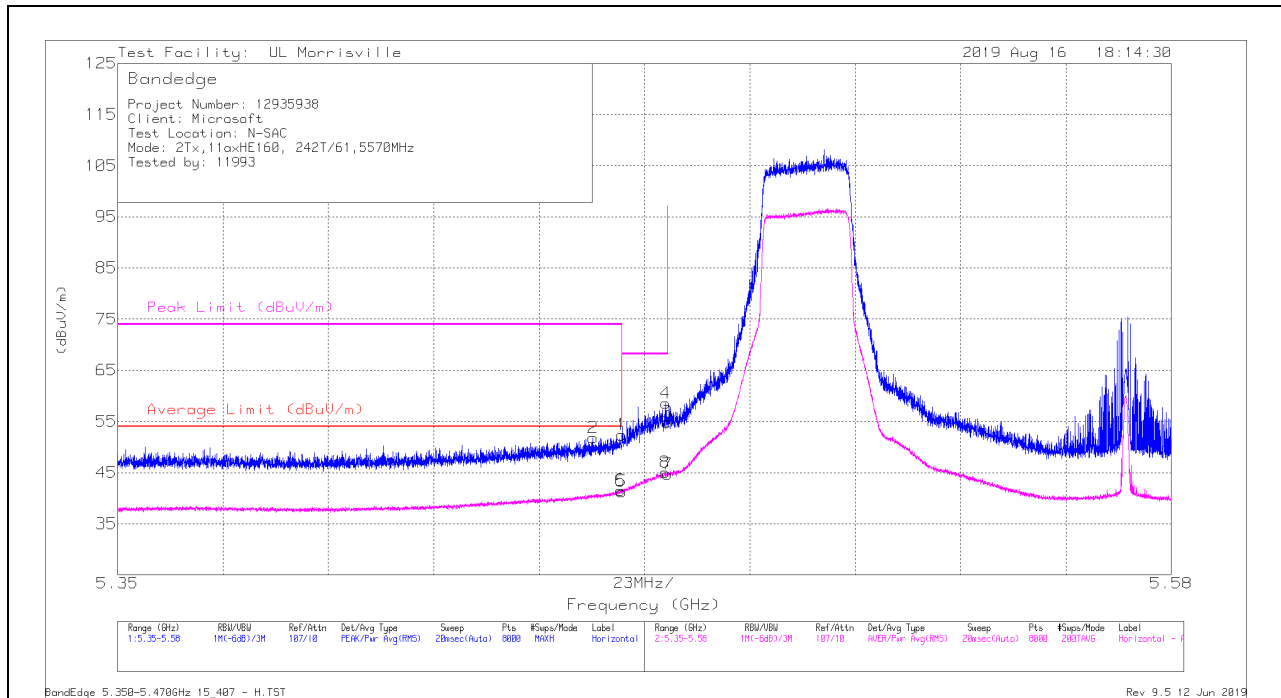

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	40.99	Pk	34.4	-23	52.39	-	-	74	-21.61	314	316	H
2	* ** 5.45377	40.41	Pk	34.4	-23	51.81	-	-	74	-22.19	314	316	H
5	* ** 5.45998	29.91	RMS	34.4	-23	41.31	54	-12.69	-	-	314	316	H
6	* ** 5.45973	30.15	RMS	34.4	-23	41.55	54	-12.45	-	-	314	316	H
8	5.46944	33.53	RMS	34.4	-22.9	45.03	-	-	-	-	314	316	H
4	5.46962	47.04	Pk	34.4	-22.9	58.54	-	-	68.2	-9.66	314	316	H
3	5.46999	43.36	Pk	34.4	-22.9	54.86	-	-	68.2	-13.34	314	316	H
7	5.46999	33.16	RMS	34.4	-22.9	44.66	-	-	-	-	314	316	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

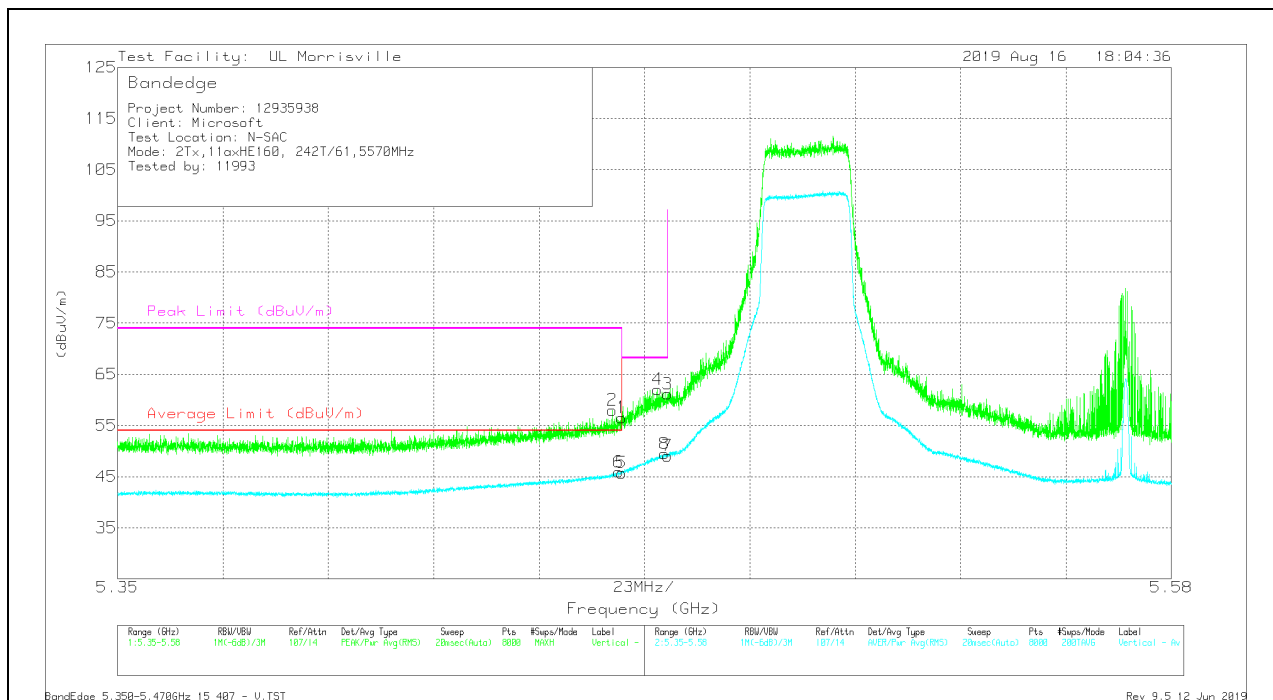


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	45.14	Pk	34.4	-23	56.54	-	-	74	-17.46	300	288	V
2	* ** 5.45791	46.61	Pk	34.4	-23	58.01	-	-	74	-15.99	300	288	V
5	* ** 5.45998	34.34	RMS	34.4	-23	45.74	54	-8.26	-	-	300	288	V
6	* ** 5.45929	34.53	RMS	34.4	-23	45.93	54	-8.07	-	-	300	288	V
4	5.46783	50.56	Pk	34.4	-22.9	62.06	-	-	68.2	-6.14	300	288	V
8	5.46939	37.95	RMS	34.4	-22.9	49.45	-	-	-	-	300	288	V
3	5.46999	49.68	Pk	34.4	-22.9	61.18	-	-	68.2	-7.02	300	288	V
7	5.46999	37.57	RMS	34.4	-22.9	49.07	-	-	-	-	300	288	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index S64

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

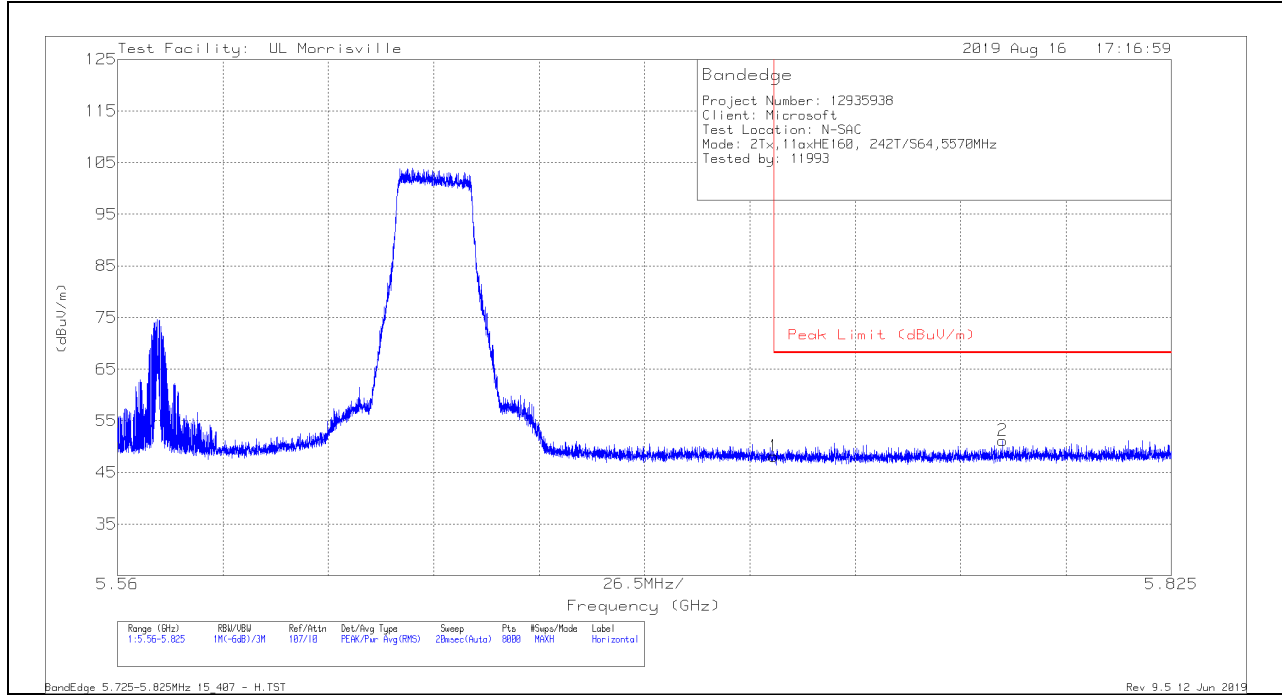

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	36.45	Pk	34.6	-22.9	48.15	68.2	-20.05	345	254	H
2	5.78253	39.2	Pk	34.7	-22.7	51.2	68.2	-17	345	254	H

Pk - Peak detector

VERTICAL RESULT

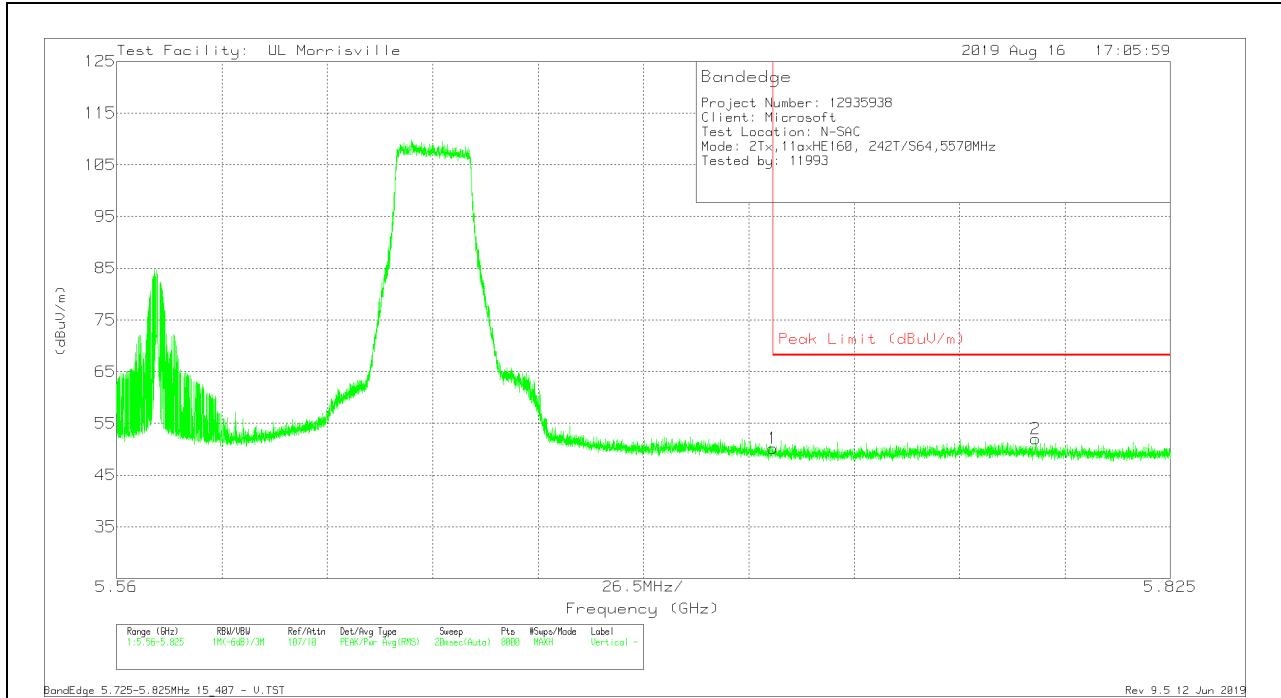


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	38.49	Pk	34.6	-22.9	50.19	68.2	-18.01	339	211	V
2	5.79117	40.03	Pk	34.7	-22.7	52.03	68.2	-16.17	339	211	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

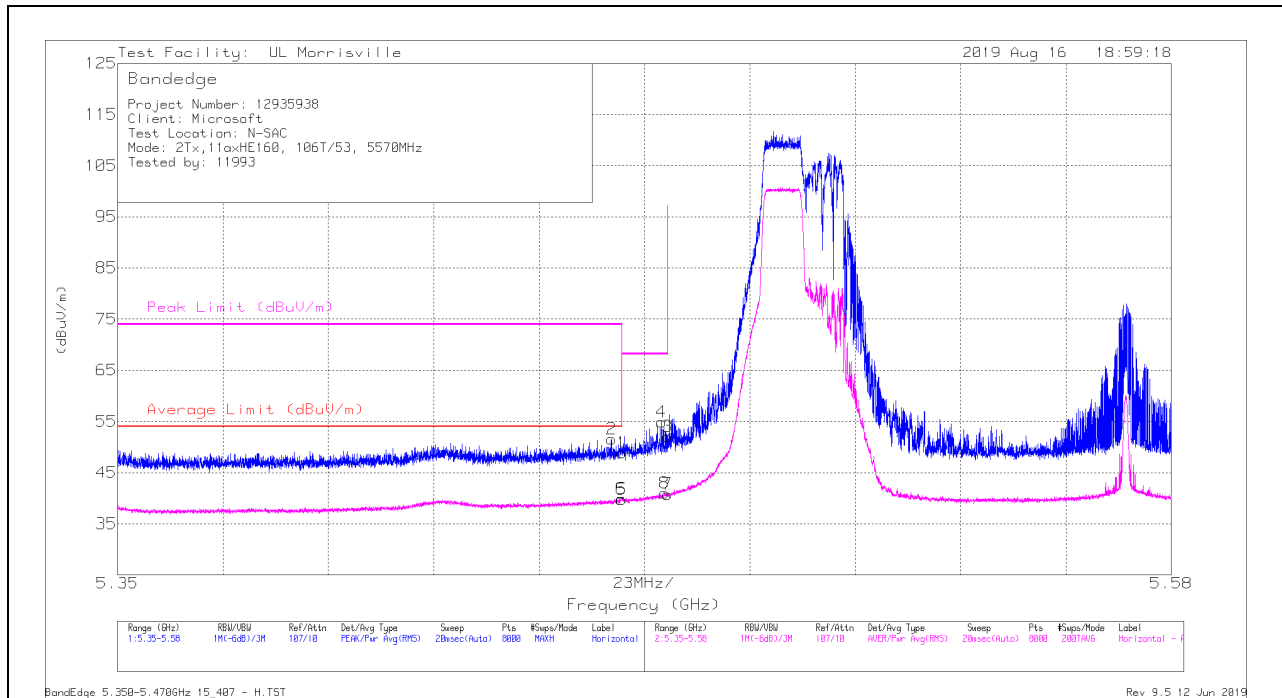

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* * * 5.45998	37.49	Pk	34.4	-23	48.89	-	-	74	-25.11	35	344	H
2	* * * 5.45777	40.14	Pk	34.4	-23	51.54	-	-	74	-22.46	35	344	H
5	* * * 5.45998	28.36	RMS	34.4	-23	39.76	54	-14.24	-	-	35	344	H
6	* * * 5.45996	28.44	RMS	34.4	-23	39.84	54	-14.16	-	-	35	344	H
4	5.46873	43.38	Pk	34.4	-22.9	54.88	-	-	68.2	-13.32	35	344	H
8	5.46933	29.48	RMS	34.4	-22.9	40.98	-	-	-	-	35	344	H
3	5.46999	40.59	Pk	34.4	-22.9	52.09	-	-	68.2	-16.11	35	344	H
7	5.46999	29.31	RMS	34.4	-22.9	40.81	-	-	-	-	35	344	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

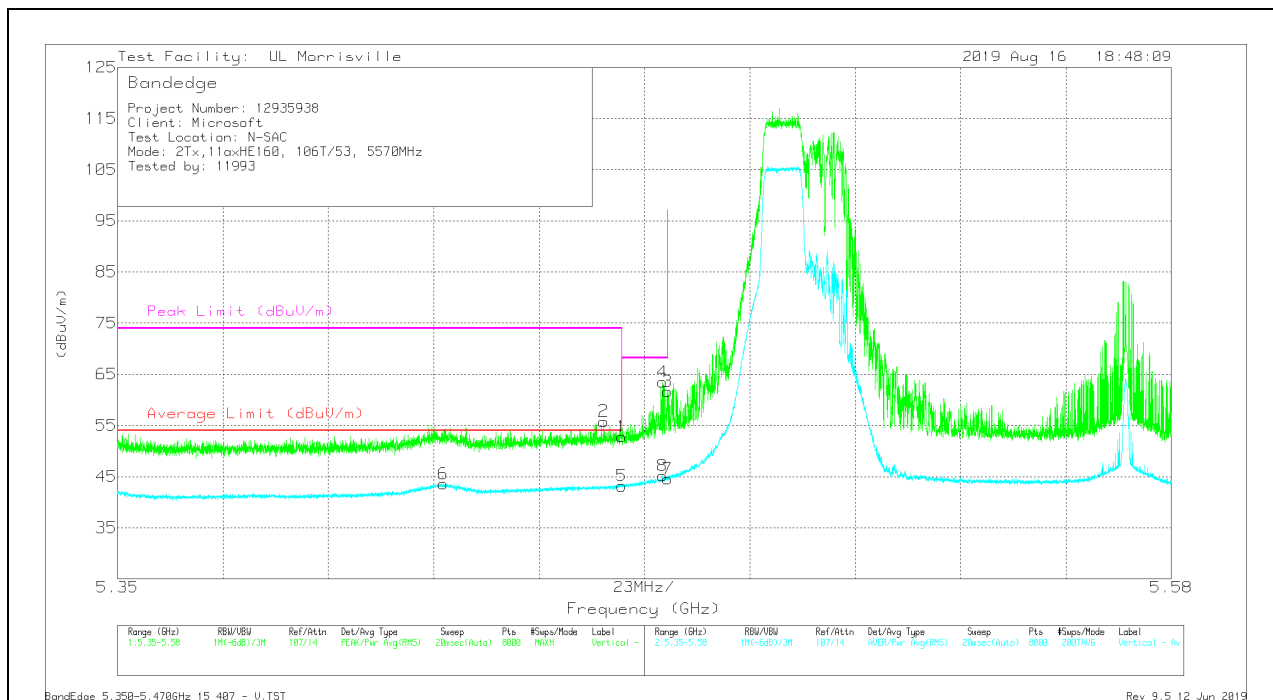


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	41.4	Pk	34.4	-23	52.8	-	-	74	-21.2	319	291	V
2	* ** 5.4561	44.4	Pk	34.4	-23	55.8	-	-	74	-18.2	319	291	V
5	* ** 5.45998	31.77	RMS	34.4	-23	43.17	54	-10.83	-	-	319	291	V
6	* ** 5.42105	32.17	RMS	34.4	-23	43.57	54	-10.43	-	-	319	291	V
8	5.4689	33.66	RMS	34.4	-22.9	45.16	-	-	-	-	319	291	V
4	5.46898	51.99	Pk	34.4	-22.9	63.49	-	-	68.2	-4.71	319	291	V
3	5.46999	50.18	Pk	34.4	-22.9	61.68	-	-	68.2	-6.52	319	291	V
7	5.46999	33.05	RMS	34.4	-22.9	44.55	-	-	-	-	319	291	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index S60

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

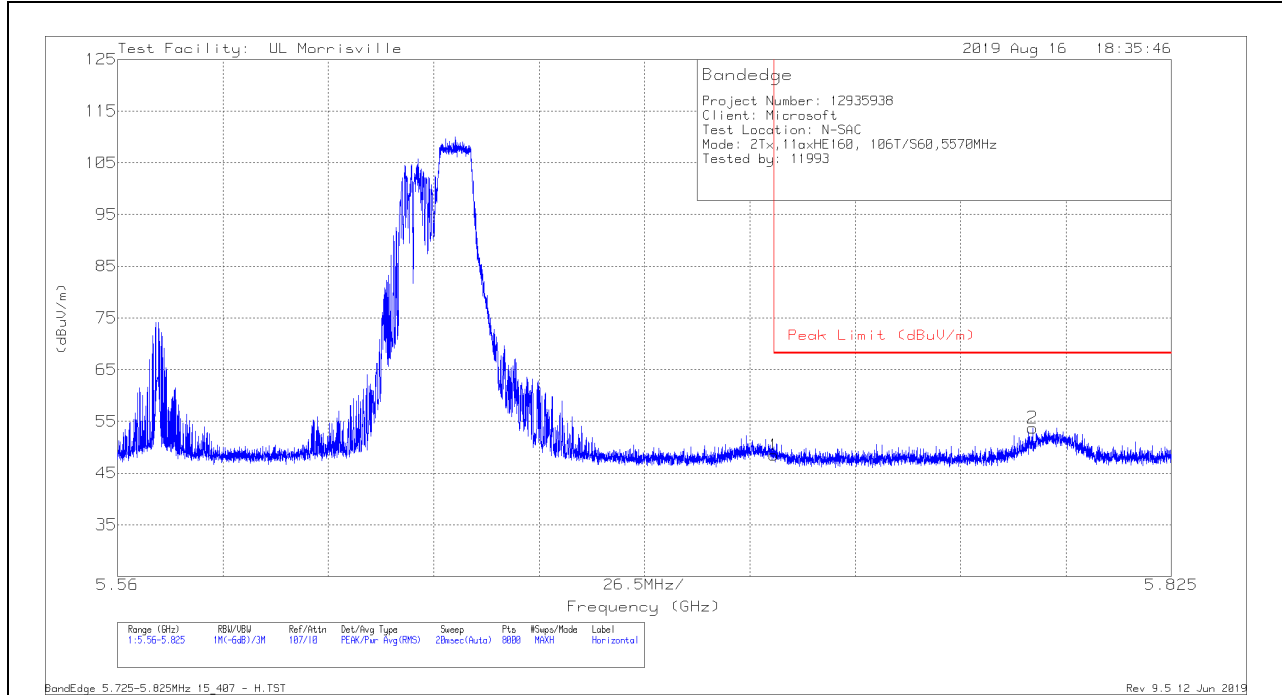

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	36.77	Pk	34.6	-22.9	48.47	68.2	-19.73	356	284	H
2	5.79008	41.74	Pk	34.7	-22.7	53.74	68.2	-14.46	356	284	H

Pk - Peak detector

VERTICAL RESULT

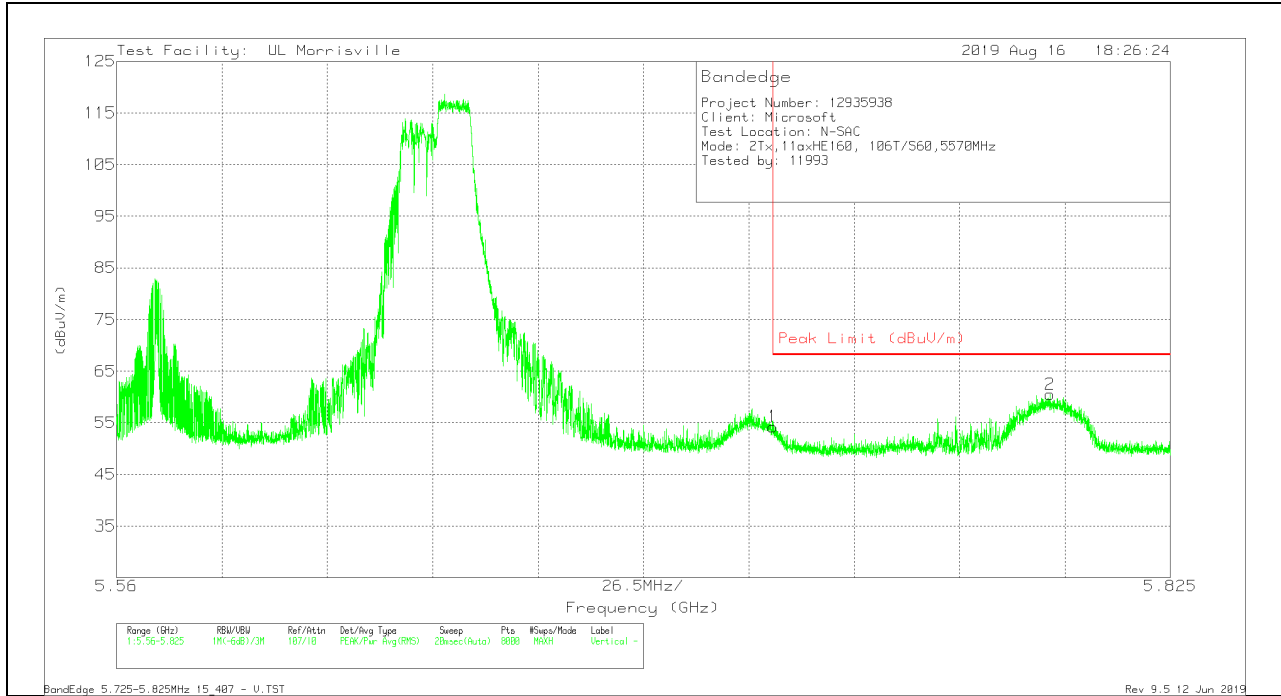


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	42.53	Pk	34.6	-22.9	54.23	68.2	-13.97	291	202	V
2	5.79475	48.54	Pk	34.7	-22.7	60.54	68.2	-7.66	291	202	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

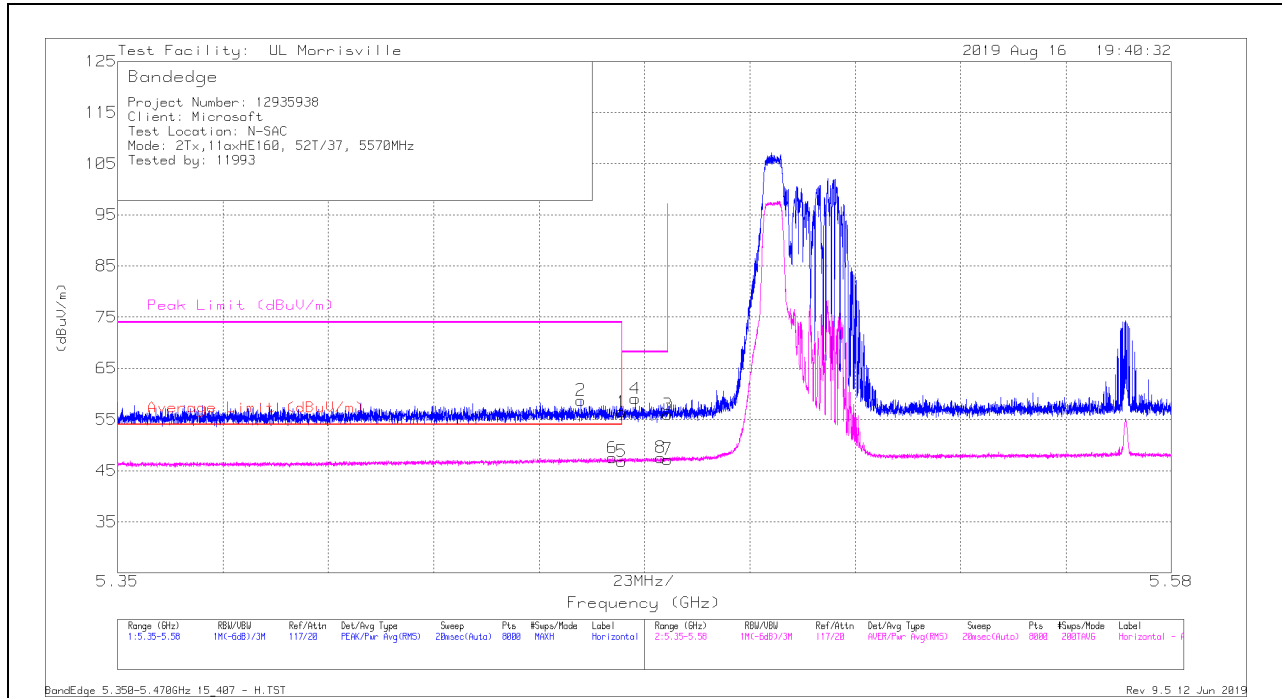

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45998	45.07	Pk	34.4	-23	56.47	-	-	74	-17.53	326	291	H
2	* ** 5.45107	47.24	Pk	34.4	-22.9	58.74	-	-	74	-15.26	326	291	H
5	* ** 5.45998	35.41	RMS	34.4	-23	46.81	54	-7.19	-	-	326	291	H
6	* ** 5.45794	36.09	RMS	34.4	-23	47.49	54	-6.51	-	-	326	291	H
4	5.46297	47.66	Pk	34.4	-23	59.06	-	-	68.2	-9.14	326	291	H
8	5.46852	36.07	RMS	34.4	-22.9	47.57	-	-	-	-	326	291	H
3	5.46999	44.49	Pk	34.4	-22.9	55.99	-	-	68.2	-12.21	326	291	H
7	5.46999	35.7	RMS	34.4	-22.9	47.2	-	-	-	-	326	291	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

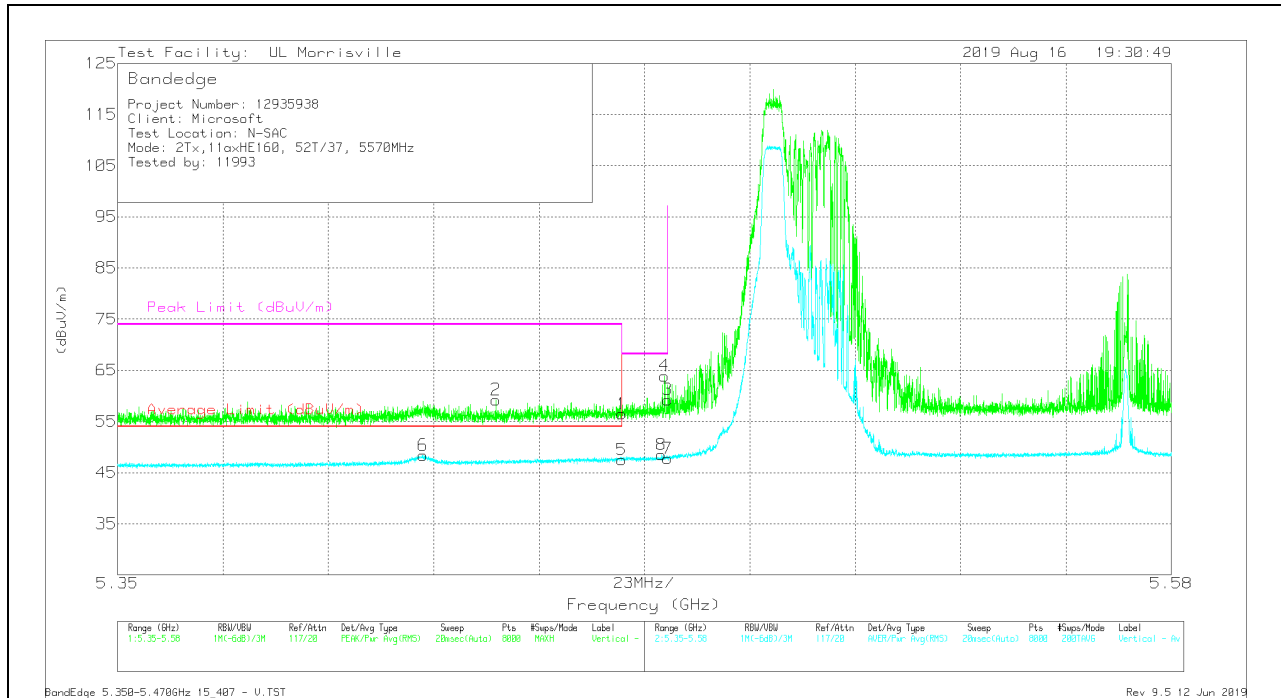


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	45.09	Pk	34.4	-23	56.49	-	-	74	-17.51	342	257	V
2	* ** 5.43258	47.83	Pk	34.4	-23	59.23	-	-	74	-14.77	342	257	V
5	* ** 5.45998	36.14	RMS	34.4	-23	47.54	54	-6.46	-	-	342	257	V
6	* ** 5.41668	37.01	RMS	34.4	-23	48.41	54	-5.59	-	-	342	257	V
8	5.4687	36.98	RMS	34.4	-22.9	48.48	-	-	-	-	342	257	V
4	5.46936	52.42	Pk	34.4	-22.9	63.92	-	-	68.2	-4.28	342	257	V
3	5.46999	47.75	Pk	34.4	-22.9	59.25	-	-	68.2	-8.95	342	257	V
7	5.46999	36.24	RMS	34.4	-22.9	47.74	-	-	-	-	342	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index S52

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

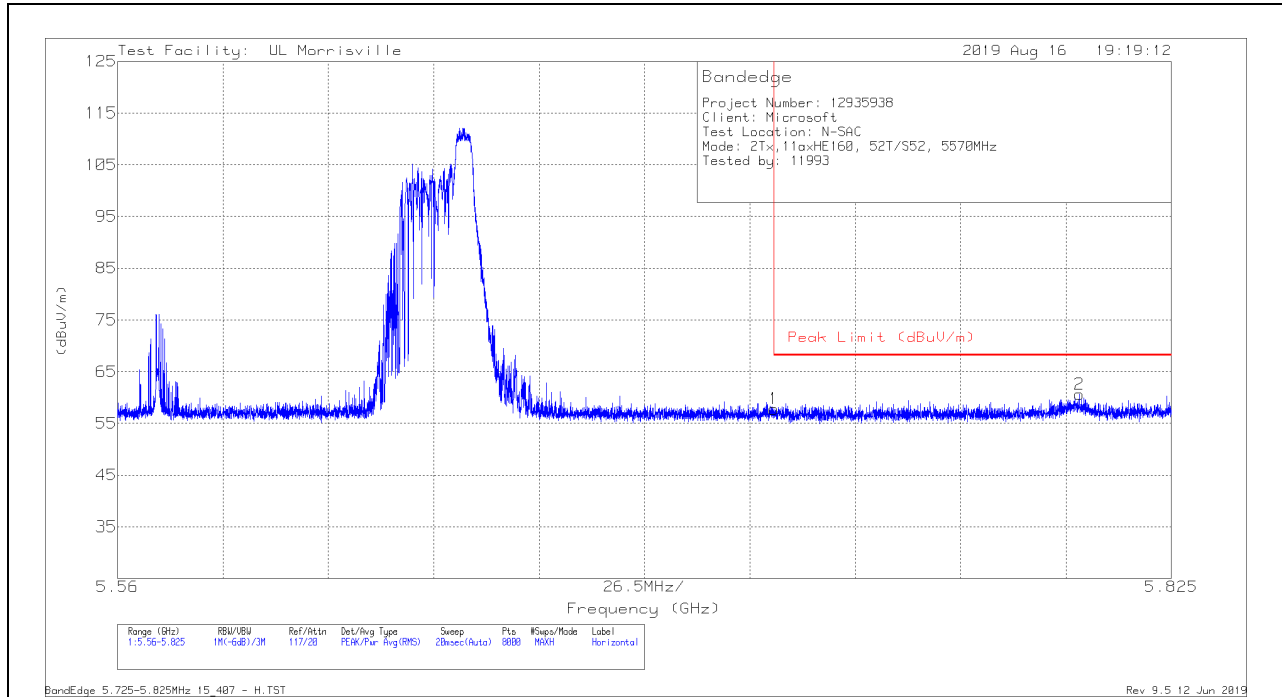

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	46.09	Pk	34.6	-22.9	57.79	68.2	-10.41	344	344	H
2	5.80181	48.62	Pk	34.7	-22.7	60.62	68.2	-7.58	344	344	H

Pk - Peak detector

VERTICAL RESULT

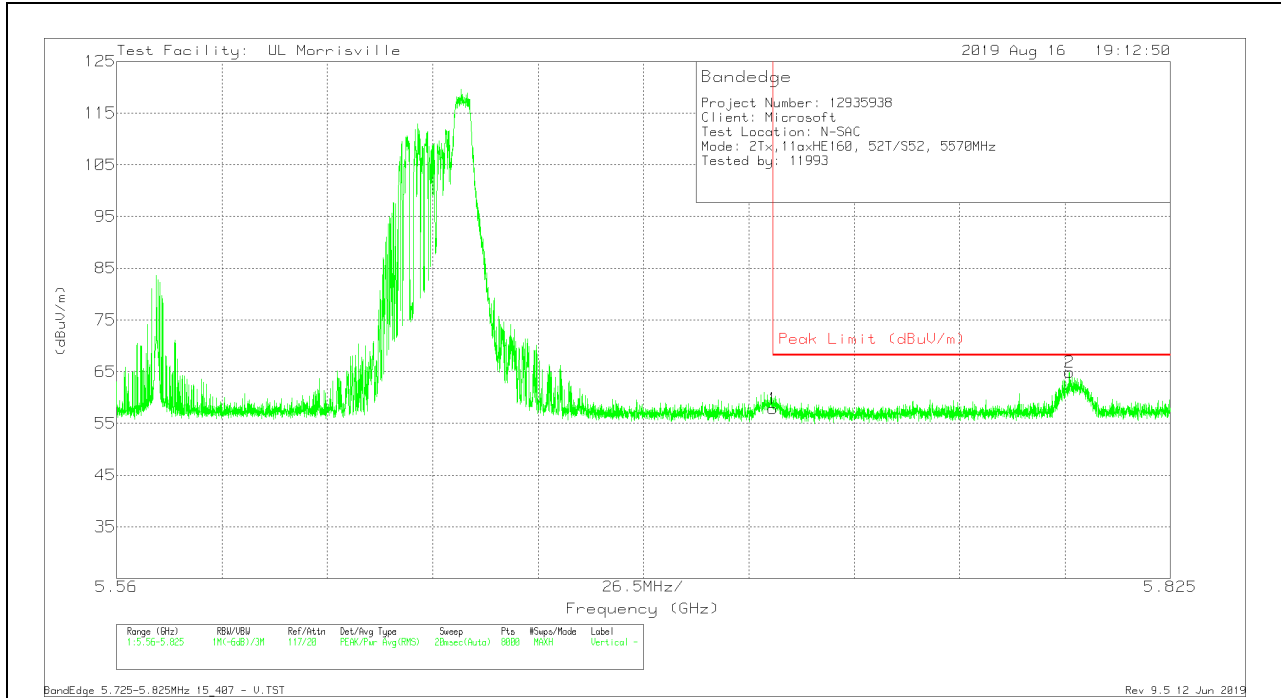


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	46.1	Pk	34.6	-22.9	57.8	68.2	-10.4	284	208	V
2	5.79959	52.9	Pk	34.7	-22.7	64.9	68.2	-3.3	284	208	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

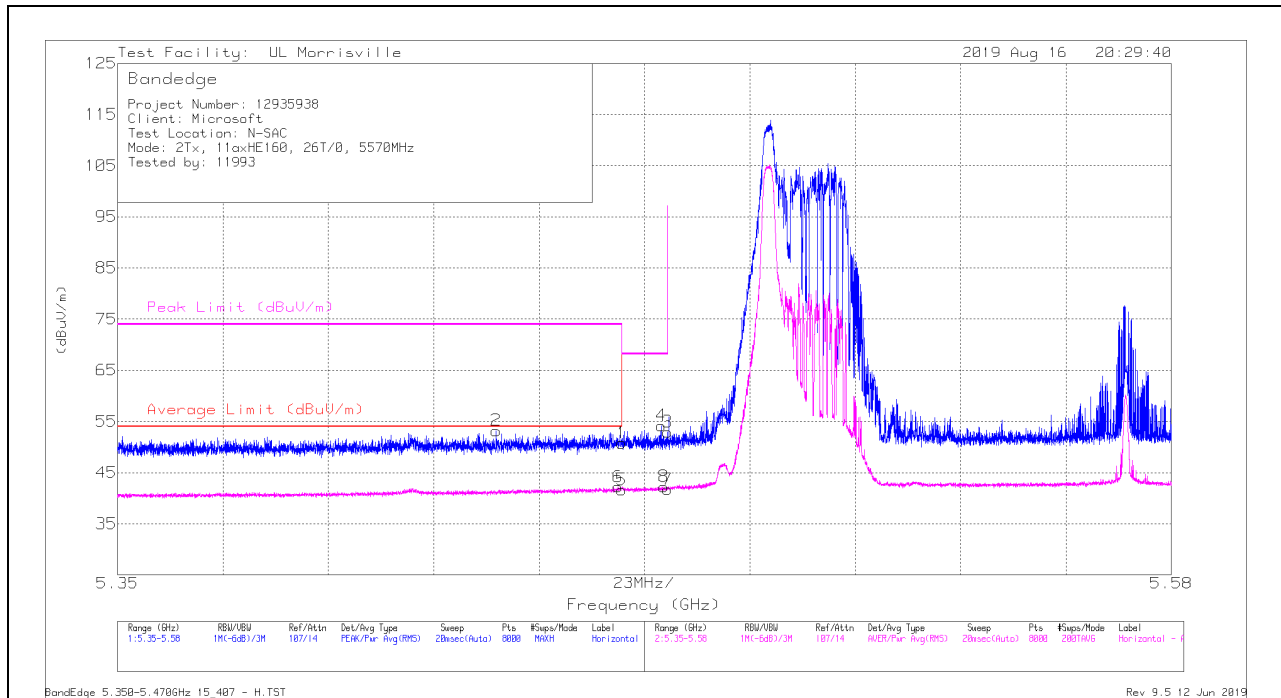

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	39.39	Pk	34.4	-23	50.79	-	-	74	-23.21	258	222	H
2	* ** 5.43264	41.83	Pk	34.4	-23	53.23	-	-	74	-20.77	258	222	H
5	* ** 5.45998	30.25	RMS	34.4	-23	41.65	54	-12.35	-	-	258	222	H
6	* ** 5.45918	30.81	RMS	34.4	-23	42.21	54	-11.79	-	-	258	222	H
4	5.46867	42.69	Pk	34.4	-22.9	54.19	-	-	68.2	-14.01	258	222	H
8	5.46919	30.77	RMS	34.4	-22.9	42.27	-	-	-	-	258	222	H
3	5.46999	41.46	Pk	34.4	-22.9	52.96	-	-	68.2	-15.24	258	222	H
7	5.46999	30.2	RMS	34.4	-22.9	41.7	-	-	-	-	258	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

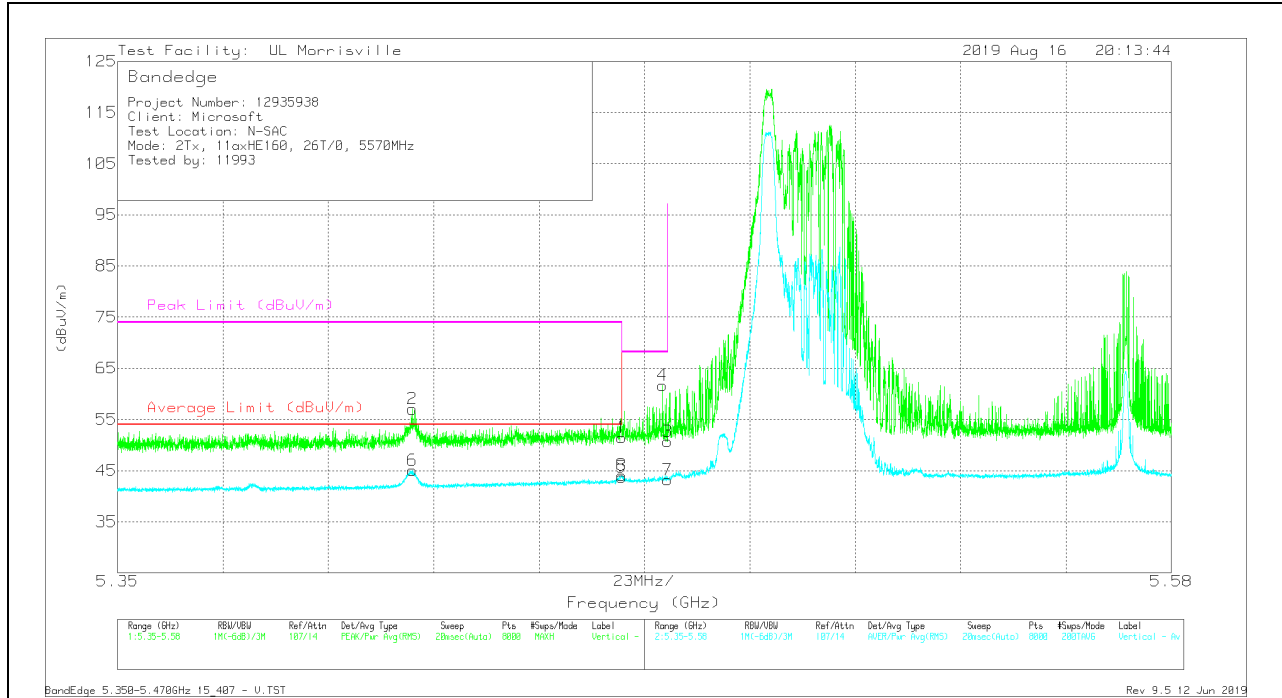


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	40.09	Pk	34.4	-23	51.49	-	-	74	-22.51	339	273	V
2	* ** 5.41432	45.66	Pk	34.4	-23	57.06	-	-	74	-16.94	339	273	V
5	* ** 5.45998	32.36	RMS	34.4	-23	43.76	54	-10.24	-	-	339	273	V
6	* ** 5.41429	33.66	RMS	34.4	-23	45.06	54	-8.94	-	-	339	273	V
8	5.46001	32.71	RMS	34.4	-23	44.11	-	-	-	-	339	273	V
4	5.46893	50.19	Pk	34.4	-22.9	61.69	-	-	68.2	-6.51	339	273	V
3	5.46999	39.22	Pk	34.4	-22.9	50.72	-	-	68.2	-17.48	339	273	V
7	5.46999	31.74	RMS	34.4	-22.9	43.24	-	-	-	-	339	273	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index S36

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

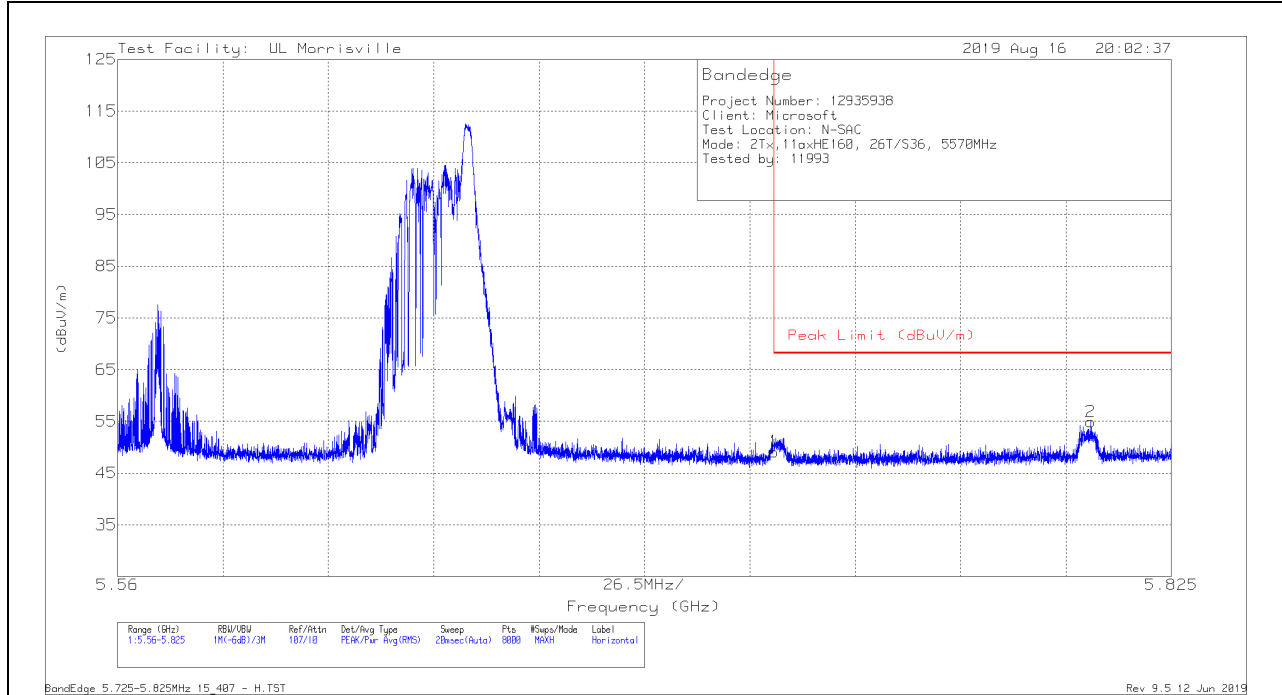

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	37.43	Pk	34.6	-22.9	49.13	68.2	-19.07	250	395	H
2	5.80476	42.81	Pk	34.8	-22.7	54.91	68.2	-13.29	250	395	H

Pk - Peak detector

VERTICAL RESULT

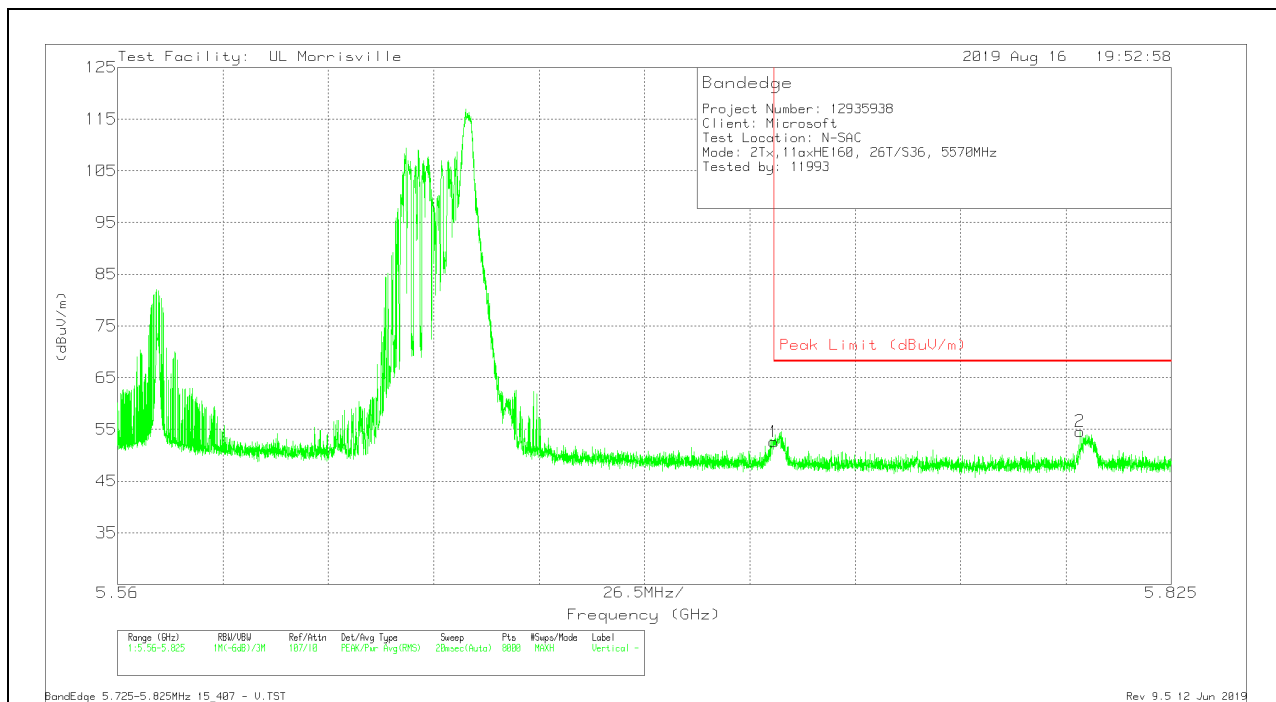

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	40.91	Pk	34.6	-22.9	52.61	68.2	-15.59	346	259	V
2	5.80201	42.61	Pk	34.7	-22.7	54.61	68.2	-13.59	346	259	V

Pk - Peak detector

10.2. WORST-CASE BELOW 1GHz AND ABOVE 18 GHz

Below 1 GHz and above 18 GHz were performed in worst-case test report R12935938-E11 (FCC ID: C3K1868, IC: 3048A-1868).

11. AC LINE CONDUCTED EMISSIONS

Power line conducted emissions were performed in worst-case test report R12935938-E11 (FCC ID: C3K1868, IC: 3048A-1868).

12. SETUP PHOTOS

Please refer to R12935938-EP1 for setup photos

END OF TEST REPORT