



RADIO TEST REPORT

For

MODEL NO.: 1914

FCC ID: C3K1914

IC ID: 3048A-1914

Test Report No. R-TR623-FCCISED-BTLE-1

Issue Date: June 1, 2020

FCC CFR47 Part 15 Subpart C
Innovation, Science and Economic Development
Canada RSS-247 Issue 2

Prepared by

Microsoft EMC Laboratory
17760 NE 67th Ct,
Redmond WA, 98052, U.S.A.
425-421-8641
dasalina@microsoft.com



TESTING CERT #3472.01

Table of Contents

1	Record of Revisions.....	2
2	Deviations from Standards	7
3	Facilities and Accreditations	7
3.1	Test Facility	7
3.2	Accreditations	7
3.3	Test Equipment	7
4	Measurement Uncertainty.....	7
5	Product Description	8
5.1	Test Configurations	8
5.2	Environmental Conditions.....	9
5.3	Antenna Requirements.....	9
5.4	Equipment Modifications	9
5.5	Dates of Testing	9
6	Test Results Summary	10
7	Test Equipment List.....	11
8	Test Site Description.....	13
8.1	Radiated Emissions Test Site.....	13
8.1.1	Radiated Measurements in 30 MHz - 1000 MHz	13
8.1.2	Radiated Measurements above 1GHz	13
8.2	Antenna port conducted measurements.....	13
8.3	Test Setup Diagrams.....	14
9	Test Results- Conducted	17
9.1	Duty Cycle	17
9.1.1	Test Requirement:.....	17
9.1.2	Test Method:	17
9.1.3	Limits:	17
9.1.4	Test Results:	17
9.1.5	Test Data:.....	17
9.2	6-dB Bandwidth	18
9.2.1	Test Requirement:.....	18
9.2.2	Test Method:	18
9.2.3	Limits:	18
9.2.4	Test Results:	18

9.2.5	Test Data:	19
9.3	99% Occupied Bandwidth	21
9.3.1	Test Requirement:	21
9.3.2	Test Method:	21
9.3.3	Limits:	21
9.3.4	Test Results:	21
9.3.5	Test Data:	22
9.4	Output Power	24
9.4.1	Test Requirement:	24
9.4.2	Test Method:	24
9.4.3	Limits:	24
9.4.4	Test Results:	24
9.4.5	Test Data:	25
9.5	Peak Power Density	27
9.5.1	Test Requirement:	27
9.5.2	Test Method:	27
9.5.3	Limits:	27
9.5.4	Test Results:	27
9.5.5	Test Data:	28
9.6	Conducted Spurious Emissions	30
9.6.1	Test Requirement:	30
9.6.2	Test Method:	30
9.6.3	Limits:	30
9.6.4	Test Result:	30
9.6.5	Test Data:	31
9.7	Conducted Band Edge Emissions	36
9.7.1	Test Requirement:	36
9.7.2	Test Method:	36
9.7.3	Limits:	36
9.7.4	Test Result:	36
9.7.5	Test Data:	37
9.8	Radiated Spurious and Band Edge Emissions	38
9.8.1	Test Requirement:	38
9.8.2	Test Method:	38

9.8.3	Limits:	41
9.8.4	Test Result:	41
9.8.5	Test Data:	42
9.9	AC Line Conducted Emissions	51
9.9.1	Test Requirements	51
9.9.2	Test Method	51
9.9.3	Limit.....	51
9.9.4	Test Result:	51
9.9.5	Test Data:	52

Test Report Attestation

Microsoft Corporation**Model:** 1914**FCC ID:** C3K1914**IC ID:** 3048A-1914**Applicable Standards**

Specification	Test Result
FCC 47CFR Rule Parts 15.207, 15.209, 15.247	Pass
Innovation, Science and Economic Development Canada RSS-247 Issue 2, RSS-GEN Issue 5	Pass

Microsoft EMC Laboratory attests that the product model identified in this report has been tested to and meets the requirements identified in the above standards. The test results in this report solely pertains to the specific sample tested, under the conditions and operating modes as provided by the customer.

This report shall not be used to claim product certification, approval, or endorsement by A2LA or any agency of any Government. Reproduction, duplication or publication of extracts from this test report is prohibited and requires prior written approval of Microsoft EMC Laboratory.



Written By: Vishwas Narayan

RF Test Engineer



Reviewed/ Issued By: Daniel Salinas

RF Compliance Technical Manager

2 Deviations from Standards

None.

3 Facilities and Accreditations

3.1 Test Facility

All test facilities used to collect the test data are located at Microsoft EMC Laboratory,
17760 NE 67th Ct,
Redmond WA, 98052, USA

3.2 Accreditations

The lab is established and follows procedures as outlined in IEC/ISO 17025 and A2LA accreditation requirements.

A2LA Accredited Testing Certificate Number: 3472.01

FCC Registration Number: US1141

IC Site Registration Numbers: 3048A-3, 3048A-4

3.3 Test Equipment

The site and related equipment are constructed in conformance with the requirements of ANSI C63.4:2014 and other equivalent applicable standards.

Test site requirements for measurements above 1 GHz are in accordance with ANSI C63.4:2014.

ANSI C63.10:2013 and the appropriate KDB test methods were followed.

4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the product, as specified in ETSI TR 100 028. This represents an expanded uncertainty expressed at 95% confidence level using a coverage factor $k=2$. These levels are for reference only and not included to determine product compliance.

Expanded uncertainty calculations are available upon request.

Test item	Uncertainty	Unit
Radiated disturbance (9 kHz to 1 GHz)	5.99	dB
Radiated disturbance (1 GHz to 40 GHz)	5.12	dB
Conducted Disturbance at Mains Port	3.31	dB
Uncertainty for Conducted Power test	1.277	dB
Uncertainty for Conducted Spurious emission test	2.742	dB
Uncertainty for Bandwidth test	4.98	kHz
Uncertainty for DC power test	0.05	%
Uncertainty for test site temperature	0.5	°C
Uncertainty for test site Humidity	3	%
Uncertainty for time	0.189	%

5 Product Description

Company Name:	Microsoft Corporation
Address:	One Microsoft Way
City, State, Zip:	Redmond, WA 98052-6399
Customer Contact:	Kyle Chen
Functional Description of the EUT:	Wireless Input device with 802.11 g/a/n 20 MHz Accessory, and Bluetooth Low Energy Radios
Model:	1914
FCC ID:	C3K1914
IC ID:	3048A-1914
Radio under test:	BTLE (2402- 2480 MHz)
Modulation(s):	GFSK
Antenna Information:	Integral Antenna. Manufacturer declared max Antenna Gain in 2.4GHz band of operation: 1.74 Bi
EUT Classification:	DTS
Equipment Design State:	Prototype/Production Equivalent (DV)
Equipment Condition:	Good
Test Sample Details:	RF Conducted Test Sample- Sample ID: R-623-DV-03 S/N: 0971000705012 RF Radiated Test Sample- Sample ID: R-623-DV-02 S/N: 0971000695012

5.1 Test Configurations

Test software COM - WCN Combo Tool. Version: W1509 provided by the customer was used to program the EUT to transmit continuously.

The device can operate in only GFSK modulation. Channel numbers 0, 19 and 39 were used as Low, Mid and High Channels respectively.

5.2 Environmental Conditions

Ambient air temperature of the test site was within the range of 10 °C to 40 °C (50 °F to 104 °F) unless the EUT specified testing over a different temperature range. Humidity levels were in the range of 10% to 90% relative humidity. Testing conditions were within tolerance, and any deviations required from the EUT are reported.

5.3 Antenna Requirements

The antennas are permanently attached and there are no provisions for connection to an external antenna.

5.4 Equipment Modifications

No modifications were made during testing.

5.5 Dates of Testing

Testing was performed from April 22nd,2020 to May 15th,2020.

5.6 Test Engineers:

Test Case	Test Engineers
Radiated	Akshay Landge Nitin Kishor Kumar Nanda Gopal Jeevarathnam Paulami Roy Pooja Akhoury
Conducted	Vishwas Narayan

6 Test Results Summary

Test Description	FCC CFR 47/ ISED Rule Part	Limit	Test Result
Duty Cycle	Reporting & Measurements	Reporting & Measurement Purposes only	N/A
6dB Bandwidth	15.247 (a)(2) RSS-247 [5.2]	$\geq 500\text{kHz}$	Pass
Occupied Bandwidth	Reporting & Measurements	Reporting & Measurement Purposes only	N/A
Output Power	15.247 (b)(3) RSS-247 [5.4]	≤ 1 Watt	Pass
Equivalent Isotropic Radiated Power	RSS-247 [5.4]	≤ 4 Watt	Pass
Power Spectral Density	15.247 (e) RSS-247 [5.2]	$\leq 8\text{dBm}/3\text{kHz}$	Pass
Conducted Band Edge/Unwanted Emissions	15.247 (d) RSS-247 [5.5]	At least 20dBc	Pass
Radiated Spurious Emissions/ Restricted Band Emissions	15.205, 15.209 RSS-247 [5.5] RSS-Gen [8.9]	FCC CFR 47 15.209 limits RSS-Gen [8.9]	Pass
AC Power Line Conducted Emissions	15.207 RSS-Gen [8.8]	FCC CFR 47 15.207 limits RSS-Gen [8.8]	Pass

7 Test Equipment List

Equipment used for Radiated and Conducted Measurements				
Manufacturer	Description	Model #	Asset #	Calibration Due
Keysight	Signal Analyzer	N9020B	RF-997	5/5/2020*
Rohde & Schwarz	EMI Test Receiver	ESU40	RF-248	4/5/2021
Rohde & Schwarz	EMI Test Receiver	ESU40	RF-192	4/5/2021
Rohde & Schwarz	Open Switch and Control	OSP130	RF-249	12/11/2020
Rohde & Schwarz	Open Switch and Control	OSP150	RF-250	12/11/2020
Rohde & Schwarz	Open Switch and Control	OSP130	RF-018	12/15/2020
Rohde & Schwarz	Open Switch and Control	OSP150	RF-019	12/15/2020
Rohde & Schwarz	Custom Filter Bank	SFUNIT RX	RF-323	12/5/2020
Rohde & Schwarz	Preamplifier	TS-PR26	RF-199	12/4/2020
Rohde & Schwarz	Power Meter	NRP2	RF-210	4/7/2021
Rohde & Schwarz	Power Sensor	NRP-Z81	RF-283	4/12/2021
Sunol Sciences	Antenna - Broadband	JB6	EMC-640	1/28/2021
ETS-Lindgren	Antenna – Passive Loop	6512	RF-202	2/21/2021
ETS-Lindgren	Antenna - Double-Ridged	3117	RF-139	6/14/2020
ETS-Lindgren	Antenna - Standard Gain	3160-09	EMC-452	11/21/2020
Huber & Suhner	RF Cable	SucoFlex 100	RF-452	12/15/2020
Huber & Suhner	RF Cable	SucoFlex 100	RF-350	12/5/2020
Huber and Suhner	RF-Cable	Cable- SucoFlex 106A	RF-599	12/6/2020
Huber & Suhner	RF Cable	SucoFlex 102A	RF-269	12/3/2020
Micro-Coax	RF Cable	UTI Flex	RF-359	12/15/2020
Micro-Coax	RF Cable	UTI Flex	RF-354	12/6/2020

Micro-Coax	RF Cable	UFB311A-1-0787-50U50U	EMC-351	12/15/2020
MegaPhase	RF Cable	EMC3-N1N1-394	RF-1035	12/26/2020
MegaPhase	RF Cable	EMC3-N1N1-394	RF-1036	12/26/2020
Madge Tech	THP Monitor	PRHTemp2000	EMC-167	8/19/2020
Murata	Cable	MXJA01JA1000	RF-885	4/28/2021
Pasternack	Attenuator	PE7004-6	EMC-951	1/28/2021
Pasternack	Attenuator	PE7087-6	RF-563	4/28/2021
PCE	Climate Meter	PCE-THB 40	EMC-1205	10/21/2020

Equipment used for Line Conducted Emissions Measurement				
Manufacturer	Description	Model #	Asset #	Calibration Due
Rohde & Schwarz	EMI Test Receiver	ESR3	EMC-669	4/12/2021
Teseq	Test LISN	NNB 051	EMC-056	7/23/2020
EMCO	AE LISN	3810/2 LISN	EMC-281	5/31/2020
Micro-Coax	RF Cable	CA HFK	EMC-887	7/15/2020
PCE	THP Monitor	PCE-THB 40	EMC-1206	10/15/2020
ETS Lindgren	TILE SW	Version 7.5.3.5	EMC-1105	N/A
Chroma	AC Power source	61602	EMC-598	N/A

Manufacturer	Description	Model #	Asset #	Calibration Due
Rohde & Schwarz	EMC 32 Test Software	V10.01.0	N/A	N/A

Note 1: Items with * were in calibration when the tests were performed.

Note 2: Items with Calibration Due date marked as N/A are characterized before use, where applicable.

8 Test Site Description

8.1 Radiated Emissions Test Site

Radiated measurements are performed in a 3m semi-anechoic chamber, which meets NSA requirements for the frequency range of 30MHz to 1000MHz. For measurements above 1 GHz, absorbers are placed on the ground plane between the receiving antenna and the EUT to meet Site VSWR requirements in accordance with ANSI C63.4:2014.

8.1.1 Radiated Measurements in 9kHz- 30 MHz

The EUT is positioned on a turntable at a height of 80cm using a non-conducting table. A loop antenna is positioned at 3m from the EUT periphery at 1m height from the ground. The turntable is rotated 360 degrees to determine the highest emissions. This is repeated for three orientations of the measurement antenna- parallel, perpendicular and ground-parallel. All possible orientations of the EUT were investigated for emissions and the flat orientation was identified as the worst-case configuration.

8.1.2 Radiated Measurements in 30 MHz - 1000 MHz

The EUT is positioned on a turntable at a height of 80cm using a non-conducting table. A linearly polarized broadband antenna is positioned at 3m from the EUT periphery. The turntable is rotated 360 degrees, and the antenna height varied from 1m to 4m to determine the highest emissions. This is repeated for both horizontal and vertical polarizations of the measurement antenna. All possible orientations of the EUT were investigated for emissions and the vertical standing orientation was identified as the worst-case configuration.

8.1.3 Radiated Measurements above 1GHz

The EUT is positioned on a turntable at a height of 1.5m. A linearly polarized antenna is positioned 3m from the EUT periphery. Guidelines in ANSI C63.10:2013 were followed with respect to maximizing the emissions. The measurement antenna is set at a fixed 1.5m height while the turntable is rotated 360 degrees and the EUT elevation angle is varied from 0 to 150 degrees to determine the highest emissions. This is repeated for both horizontal and vertical polarizations of the measurement antenna. Measurements above 18GHz were performed at a 3m distance. Near field scanning is performed to identify suspect frequencies above 1GHz.

8.2 Antenna port conducted measurements

All antenna port conducted measurements were performed on a bench-top setup consisting of a spectrum analyzer, power meter (as necessary), splitters/combiners (as necessary), attenuators, and pre-characterized RF cables.

The correction factors between the EUT and the spectrum analyzer were added internally in the analyzer settings, where applicable. The plots displayed take these correction factors into account.

8.3 Test Setup Diagrams

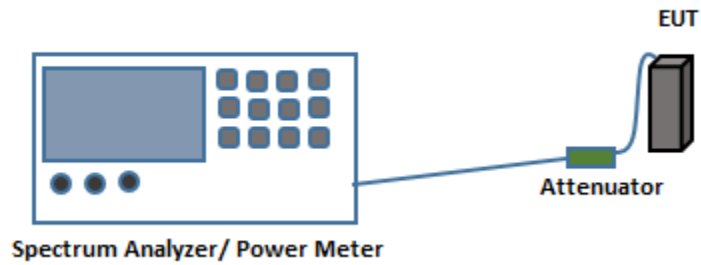


Fig.1. Test Setup for Antenna port conducted measurements

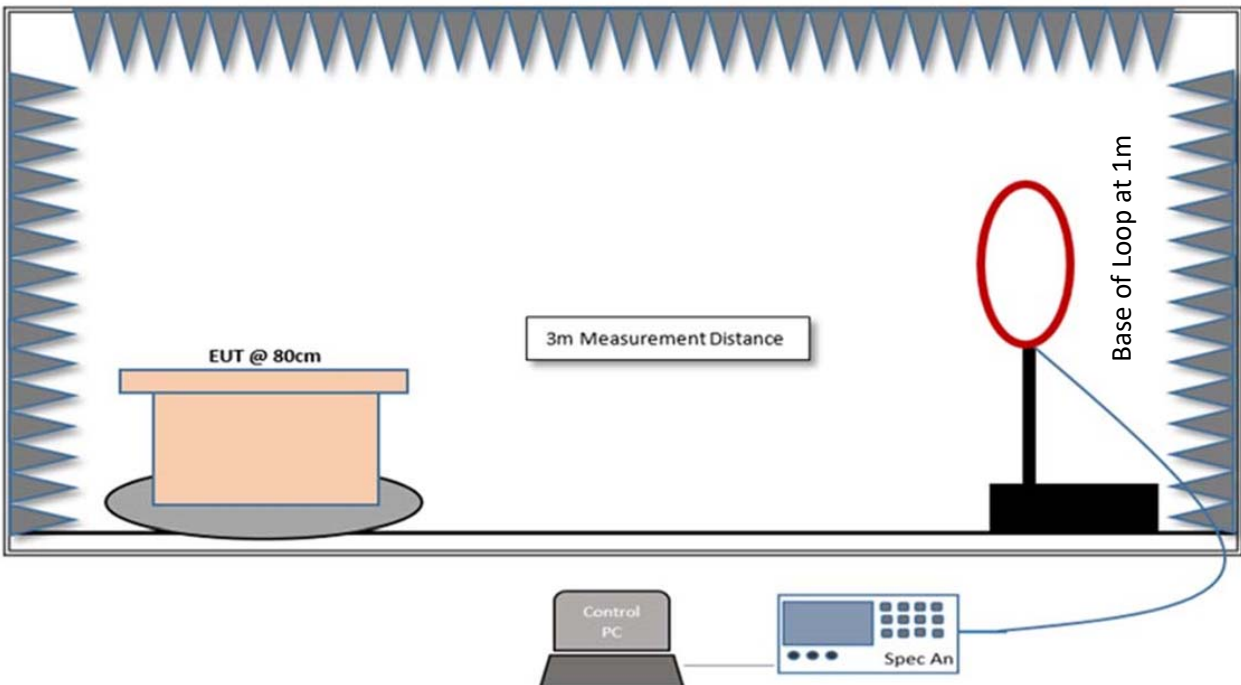


Fig.2. Test Setup for Radiated measurements in 9kHz - 30MHz Range

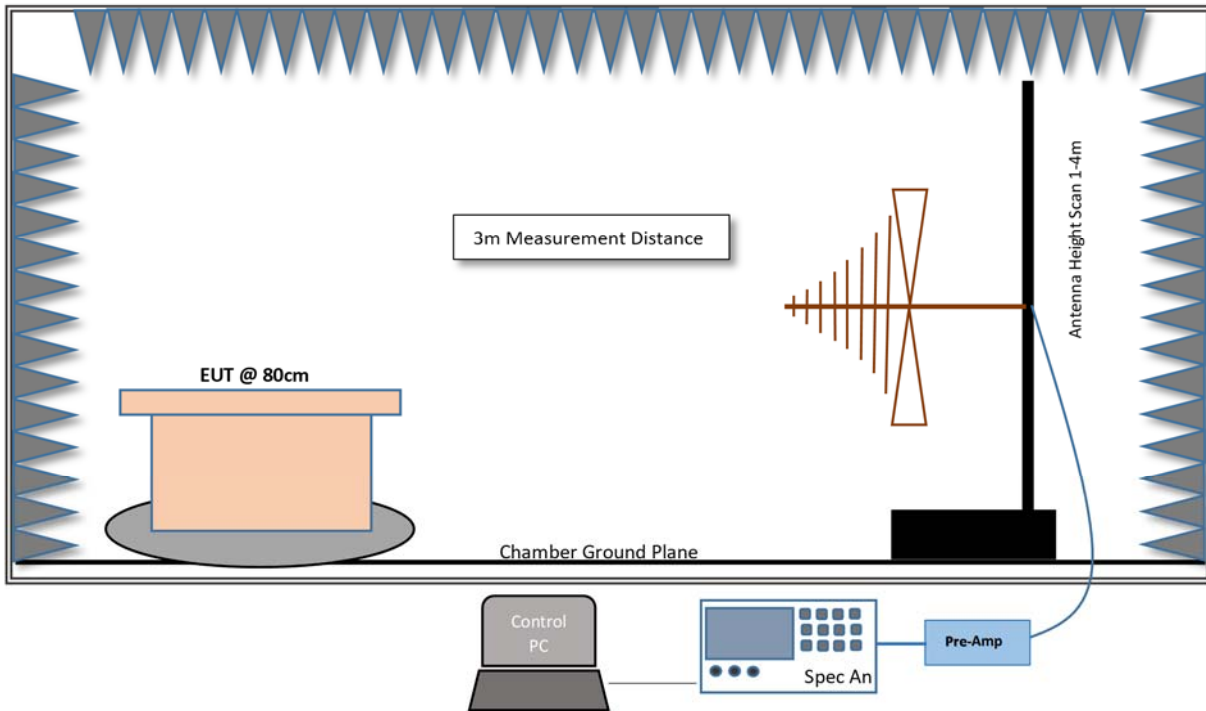


Fig.3. Test Setup for Radiated measurements in 30MHz- 1GHz Range

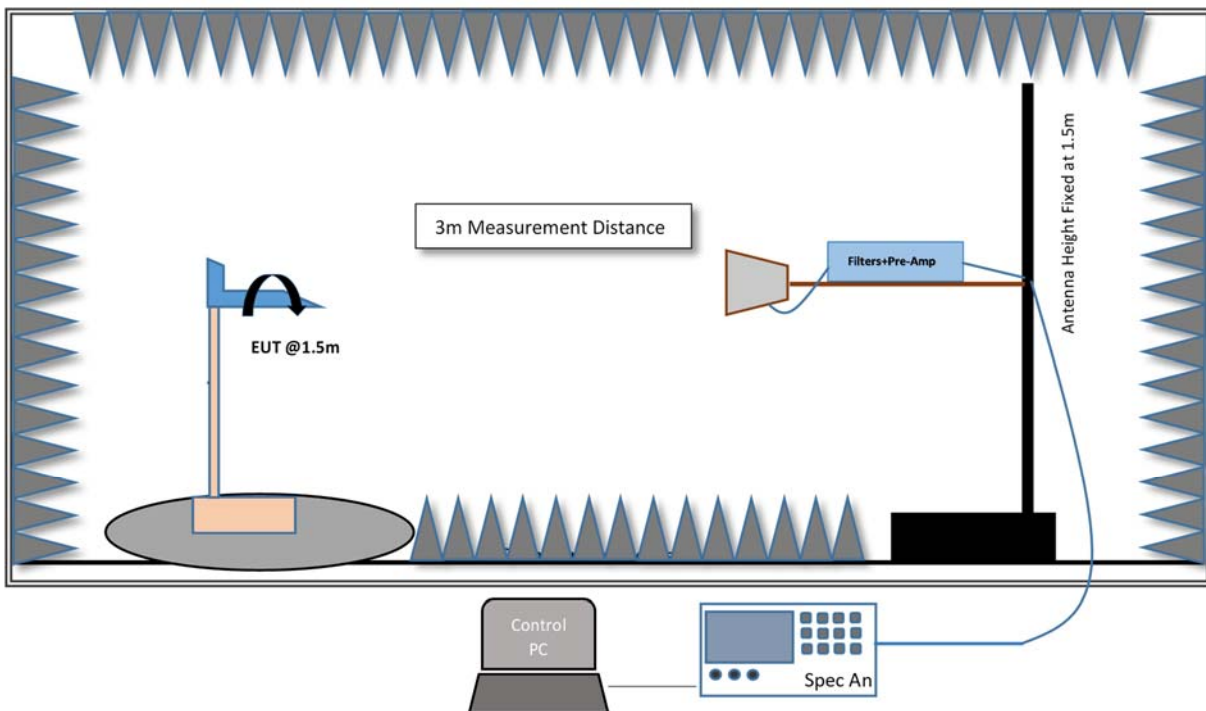


Fig.4. Test Setup for Radiated measurements in 1GHz- 18GHz Range

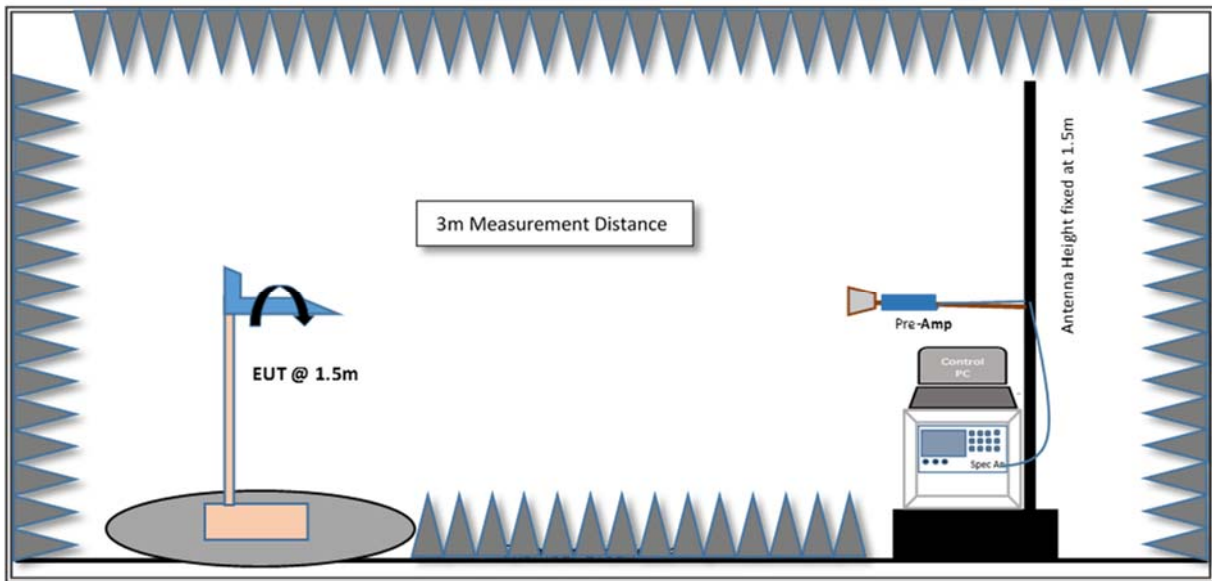


Fig.5. Test Setup for Radiated measurements >18GHz

9 Test Results- Conducted

9.1 Duty Cycle

9.1.1 Test Requirement:

Reporting and measurement purposes only.

9.1.2 Test Method:

Measurements were performed according to the procedure defined in ANSI C63.10: 2013.

Spectrum Analyzer Settings:

RBW \geq Occupied Bandwidth if possible; otherwise, set RBW to the largest available value

VBW \geq RBW \geq Signal Period

Detector = Peak

Span = 0 Hz

Sweep points > 100

9.1.3 Limits:

Reporting and measurement purposes only.

9.1.4 Test Results:

Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)
2440	0.376	0.624	60.256	2.200

9.1.5 Test Data:

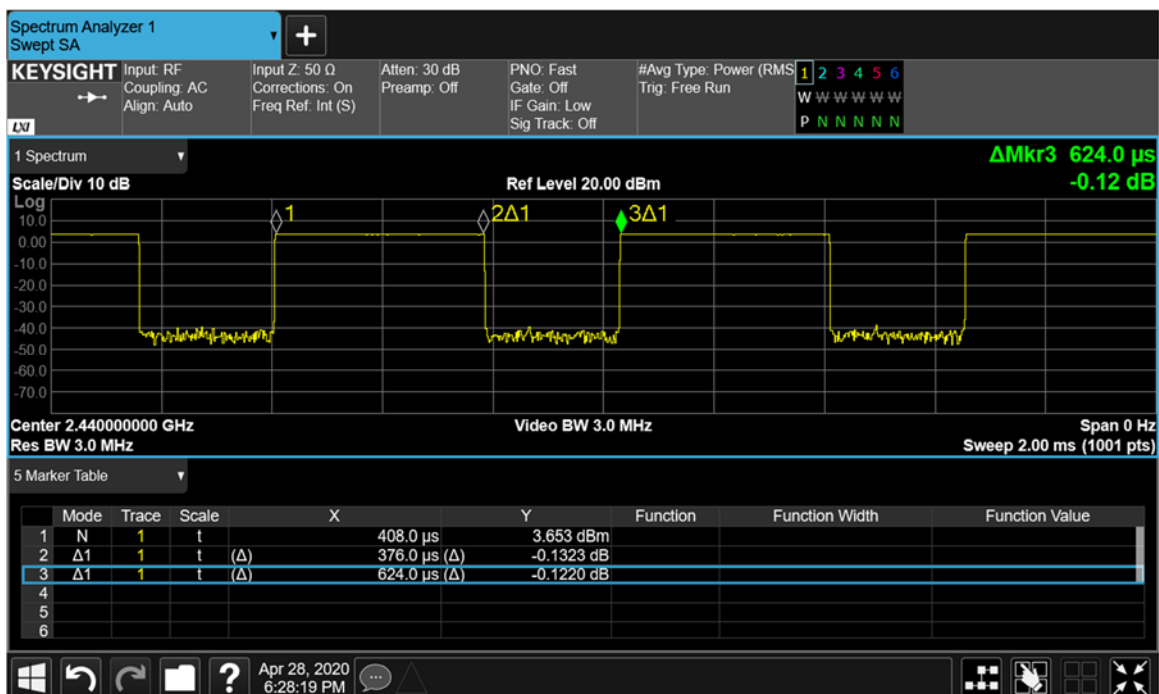


Figure 9-1 Duty Cycle 2440MHz (Ch.0)

9.2 6-dB Bandwidth

9.2.1 Test Requirement:

FCC CFR 47 Rule Part 15.247 (a)(2)

ISED RSS-247 [5.2]

9.2.2 Test Method:

Measurements were performed according to the procedure defined in KDB 558074- Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 V05 and ANSI C63.10: 2013.

Spectrum Analyzer settings:

RBW= 100 kHz

VBW \geq 3 RBW= 300 kHz.

Trace Mode= Peak Detector (Max Hold)

Sweep time= Auto Couple

The in-built functionality of the Spectrum Analyzer is used to measure the 6-dB bandwidth.

9.2.3 Limits:

The 6-dB bandwidth shall be at least 500 kHz

9.2.4 Test Results:

Frequency (MHz)	Test Mode	Channel No.	6dB Bandwidth (kHz)	Limit (kHz)	Result
2402	BT LE	0	701.1	>500	Pass
2440	BT LE	19	700.3	>500	Pass
2480	BT LE	39	699.2	>500	Pass

9.2.5 Test Data:

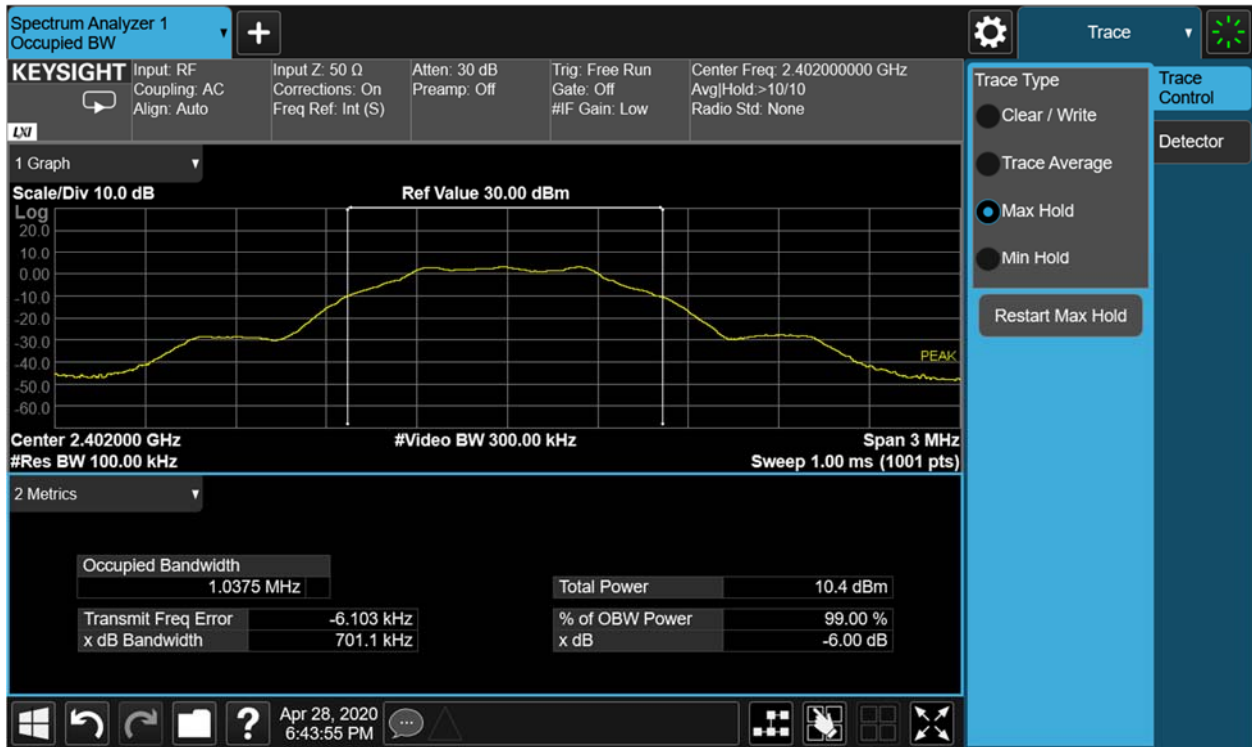


Figure 9-2 6dB Bandwidth (Ch. 0)

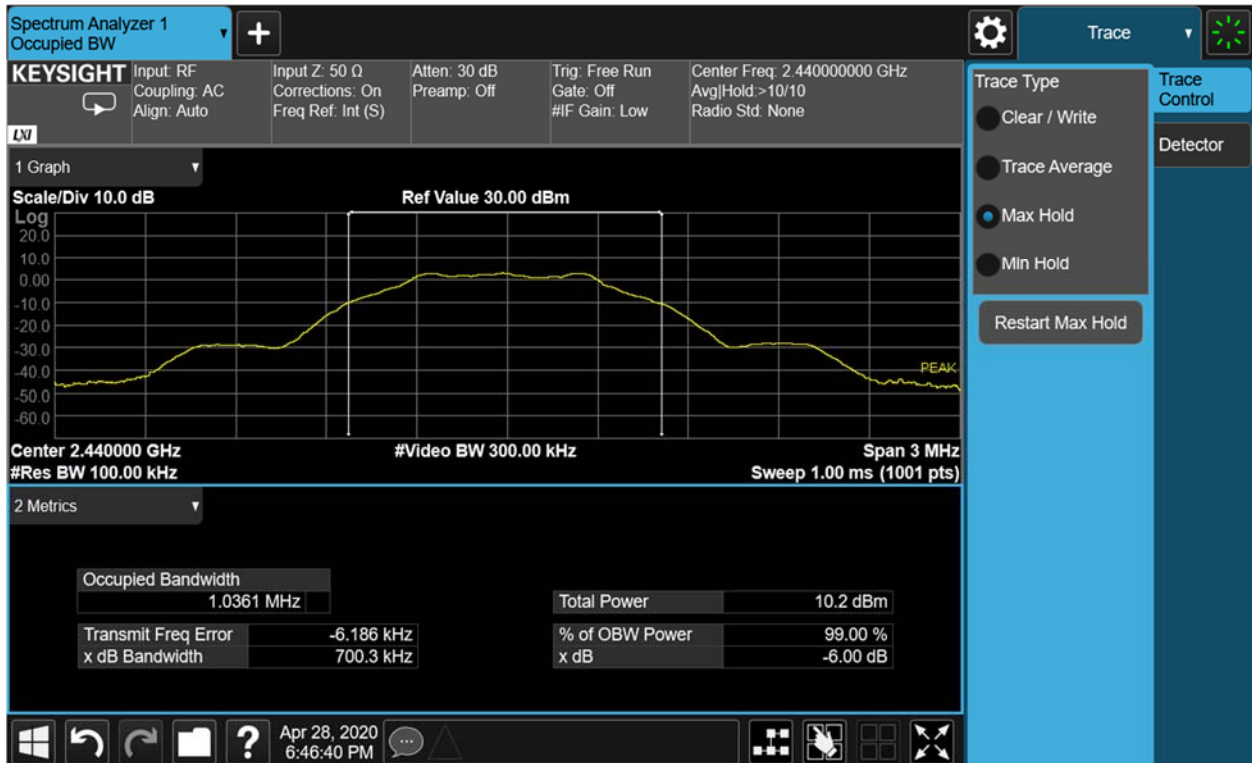


Figure 9-3 6dB Bandwidth (Ch. 19)

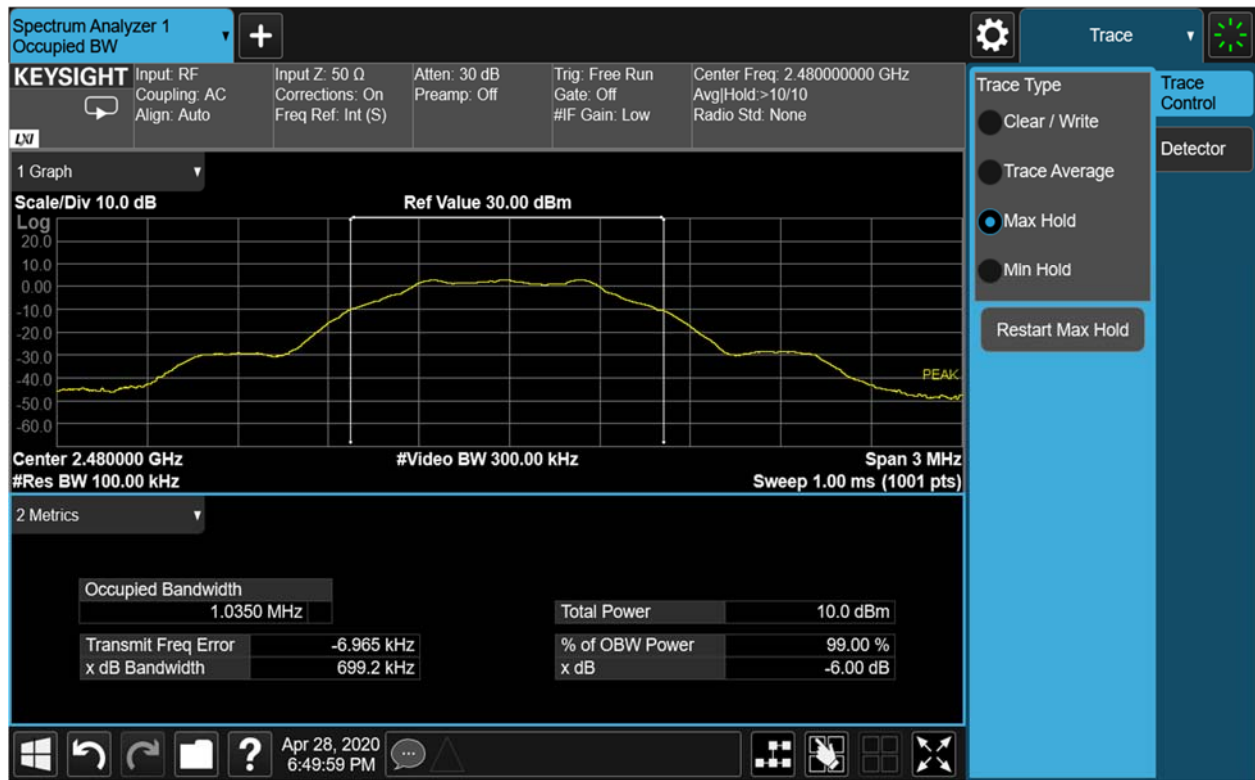


Figure 9-4 6dB Bandwidth (Ch. 39)

9.3 99% Occupied Bandwidth

9.3.1 Test Requirement:

The 99% Occupied Channel Bandwidth is the bandwidth that contains 99% of the power of the signal. This test is performed for reporting and measurement purposes only.

9.3.2 Test Method:

Measurements are performed according to ANSI C63.10: 2013.

Spectrum Analyzer settings:

Set analyzer center frequency to the nominal EUT channel frequency

Span is set to between 1.5 and 5.0 times the DTS bandwidth

RBW to: 1% to 5% of the OBW= 30 kHz

VBW \geq 3 RBW= 100 kHz

Detector = Peak

Sweep time = Auto Couple

Trace mode = max hold

Use the 99% power bandwidth function of the instrument.

9.3.3 Limits:

For reporting purpose only.

9.3.4 Test Results:

Frequency (MHz)	Test Mode	Channel No.	99% Bandwidth (MHz)
2402	BT LE	0	1.0237
2440	BT LE	19	1.0236
2480	BT LE	39	1.0229

9.3.5 Test Data:



Figure 9-5 99% Bandwidth (Ch. 0)

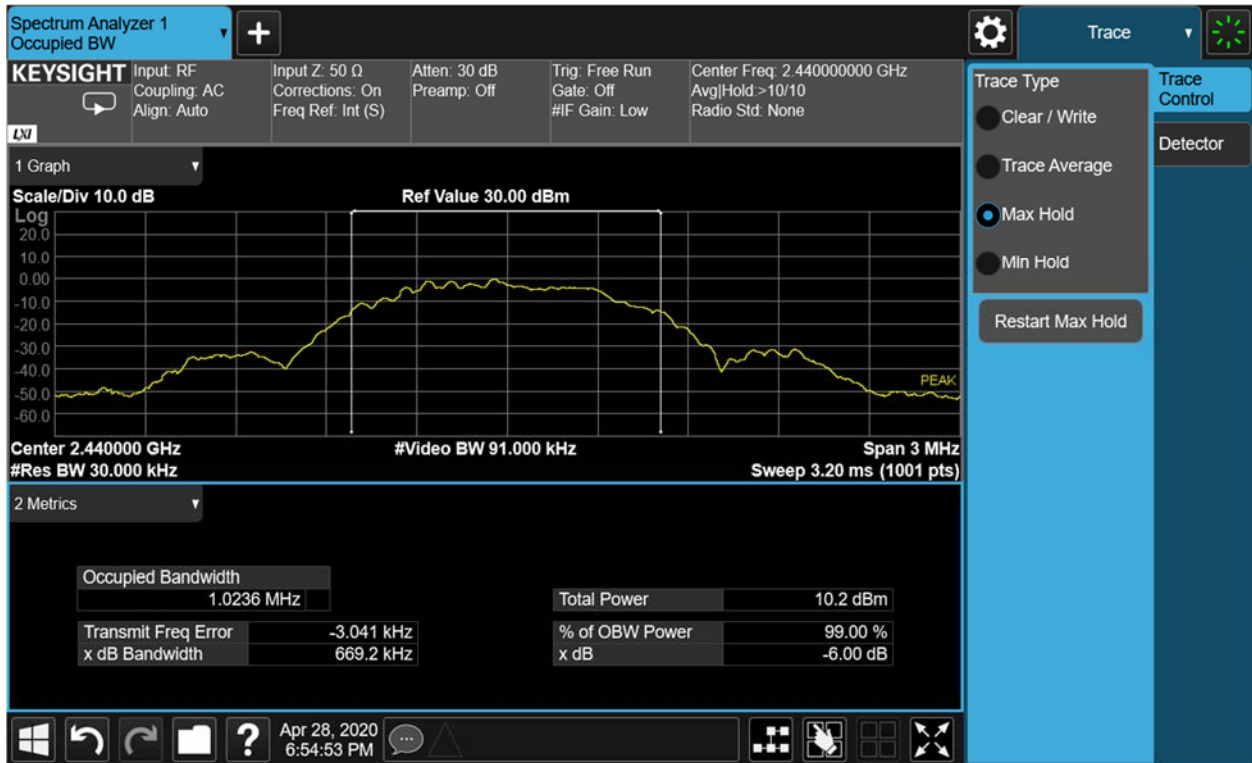


Figure 9-6 99% Bandwidth (Ch. 19)

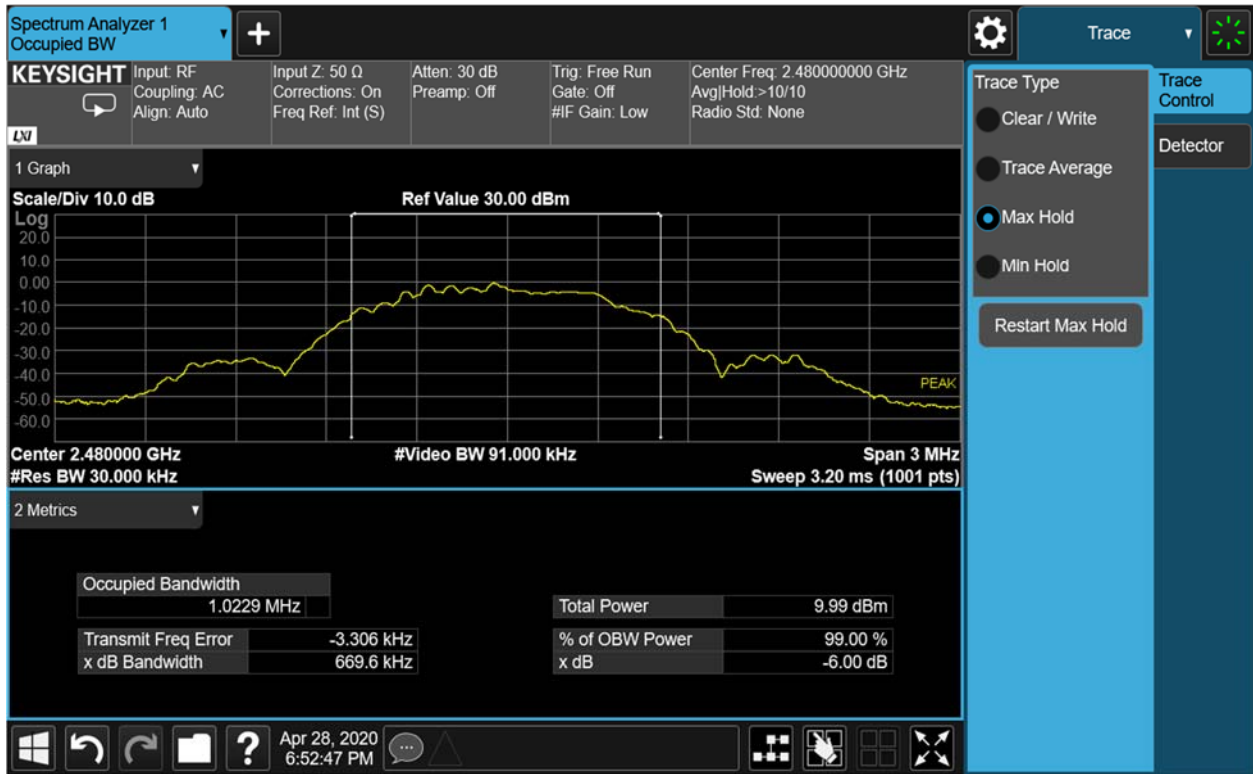


Figure 9-7 99% Bandwidth (Ch. 39)

9.4 Output Power

9.4.1 Test Requirement:

FCC CFR 47 Rule Part 15.247 (b)(3)

ISED RSS-247 [5.4]

9.4.2 Test Method:

Measurements were performed according to the procedure defined in KDB 558074 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 V05 and ANSI C63.10: 2013.

Spectrum Analyzer settings:

Peak Power:

RBW= 1 MHz

VBW= 3 MHz

Trace Mode= Peak Detector (Max Hold)

Sweep time= Auto Couple

Span= 3 MHz

9.4.3 Limits:

15.247: The maximum permissible peak output power is 30dBm (1 W)

RSS-247: The maximum peak conducted output power shall not exceed 30dBm (1 W) and the maximum radiated output power shall not exceed 36dBm (4 W) EIRP.

9.4.4 Test Results:

Frequency (MHz)	Mode	Channel No.	Cond. Peak Power (dBm)	Cond. Peak Power (W)	Cond. Peak Limit (dBm)	Margin (dB)	Result
2402	BT LE	0	4.190	0.00262	30	-25.81	Pass
2440	BT LE	19	4.020	0.00252	30	-25.98	Pass
2480	BT LE	39	3.840	0.00242	30	-26.16	Pass

Frequency (MHz)	Mode	Channel No.	Cond. Peak Power (dBm)	Max Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)	Result
2402	BT LE	0	4.190	1.740	5.930	36	-30.07	Pass
2440	BT LE	19	4.020	1.740	5.760	36	-30.24	Pass
2480	BT LE	39	3.840	1.740	5.580	36	-30.42	Pass

9.4.5 Test Data:

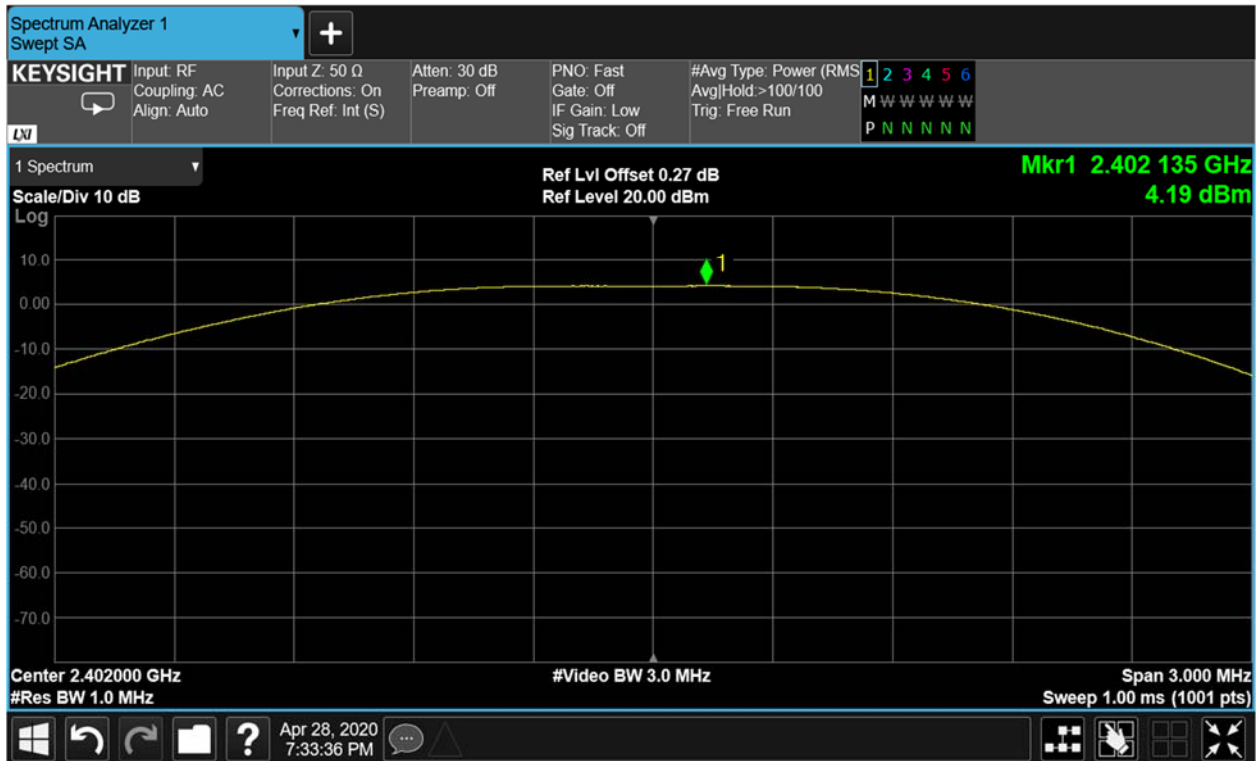


Figure 9-8 Peak Power (Ch. 0)

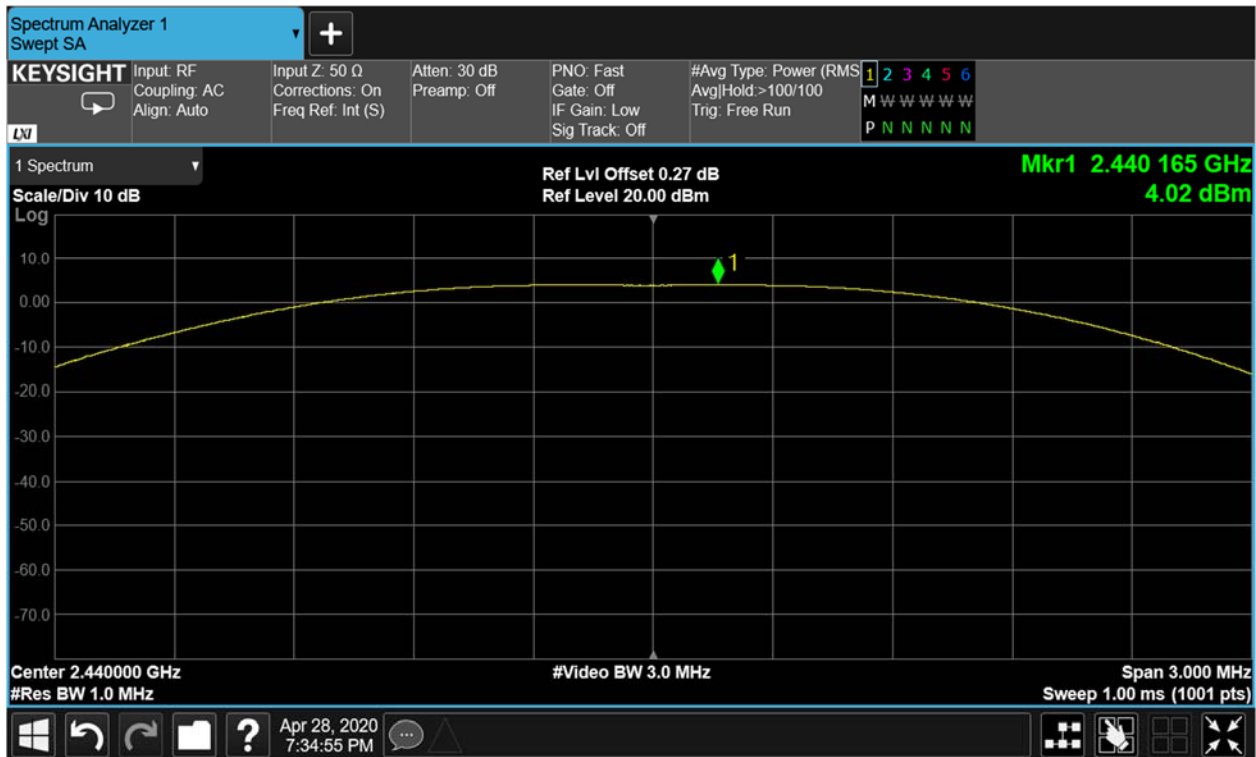


Figure 9-9 Peak Power (Ch. 19)

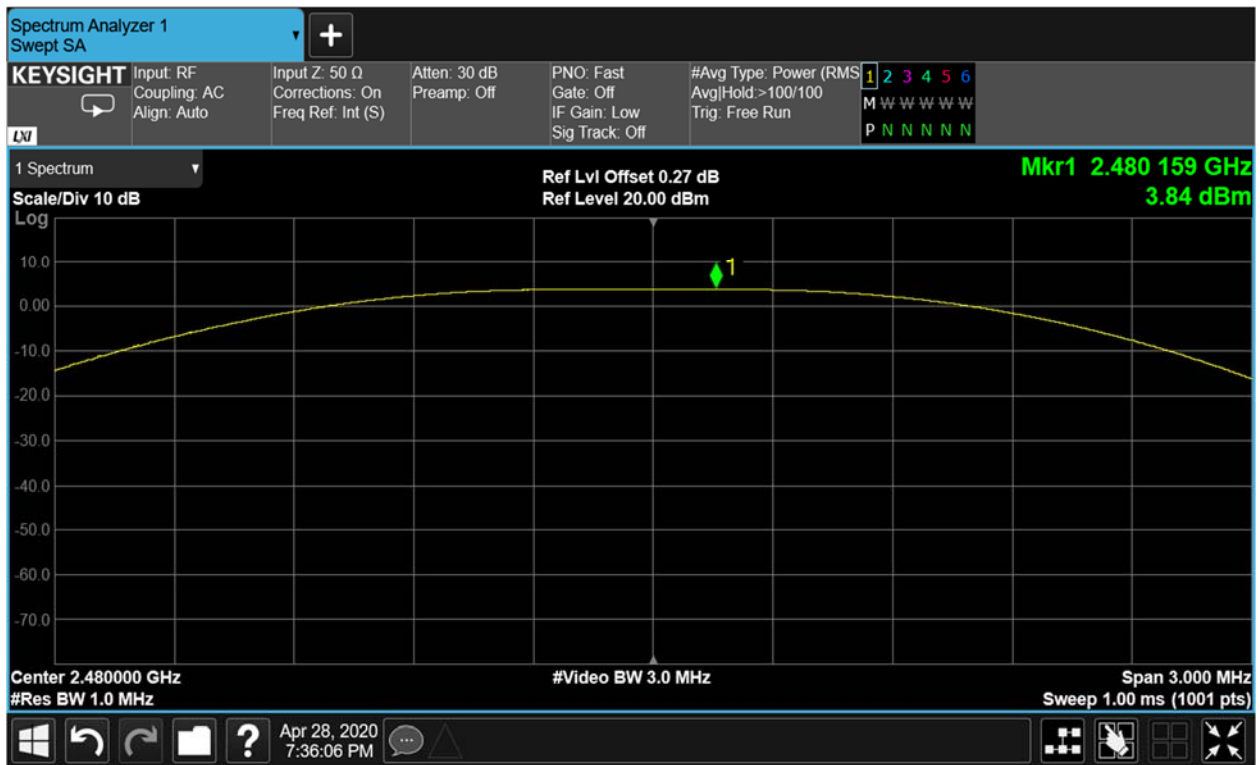


Figure 9-10 Peak Power (Ch. 39)

9.5 Peak Power Density

9.5.1 Test Requirement:

FCC CFR 47 Rule Part 15.247 (e)

ISED RSS-247 [5.2]

9.5.2 Test Method:

Measurements were performed according to the procedure defined in KDB 558074 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 V05 and ANSI C63.10: 2013.

Spectrum Analyzer settings:

RBW= 100 kHz

VBW= 300 kHz

Trace Mode= Peak Detector (Max Hold)

Sweep time= Auto Couple

Use the peak marker function to determine the maximum amplitude level within the RBW

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.5.3 Limits:

The maximum permissible power density is 8dBm/3kHz.

9.5.4 Test Results:

Frequency (MHz)	Test Mode	Channel No.	Power Spectral Density (dBm/100kHz)	Limit (dBm/3kHz)	Result
2402	BT LE	0	3.30	8	Pass
2440	BT LE	19	3.16	8	Pass
2480	BT LE	39	2.95	8	Pass

The test data shows that the EUT passes the requirement using 100kHz RBW setting and hence will meet the requirement for 3kHz BW.

9.5.5 Test Data:

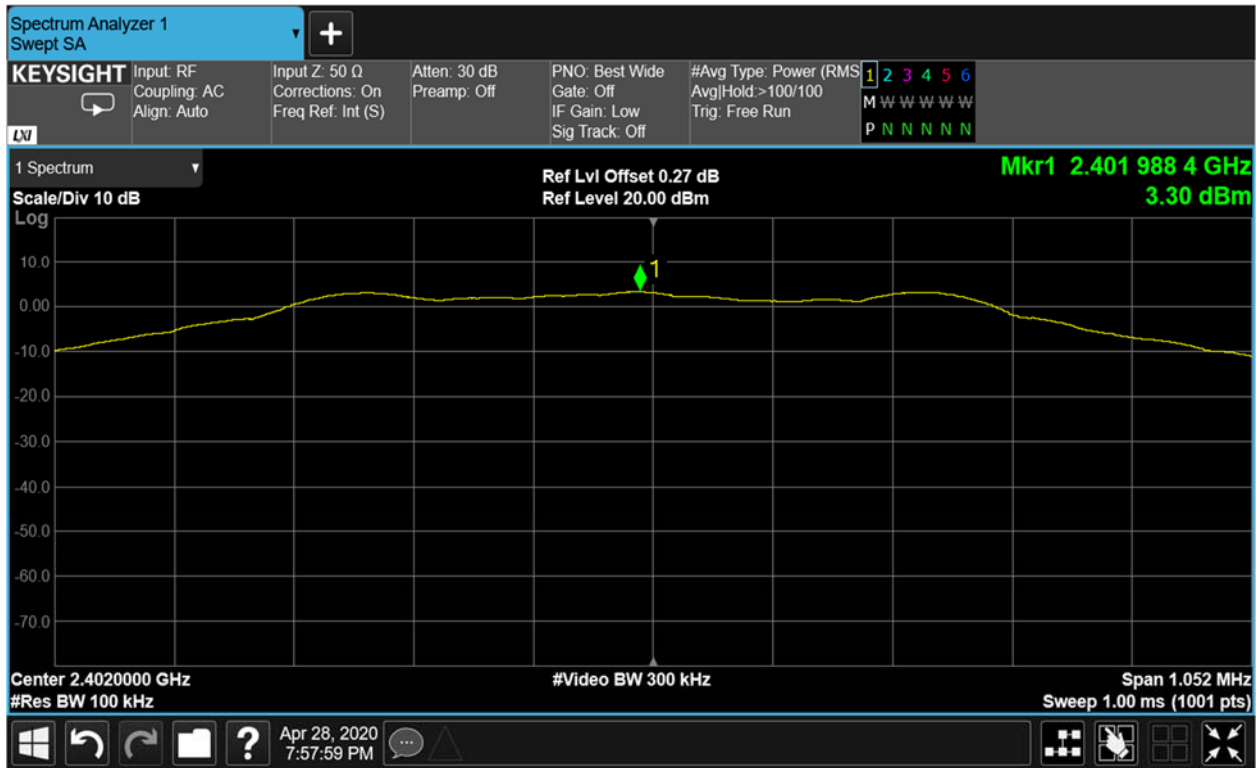


Figure 9-11 Power Spectral Density (Ch. 0)



Figure 9-12 Power Spectral Density (Ch. 19)

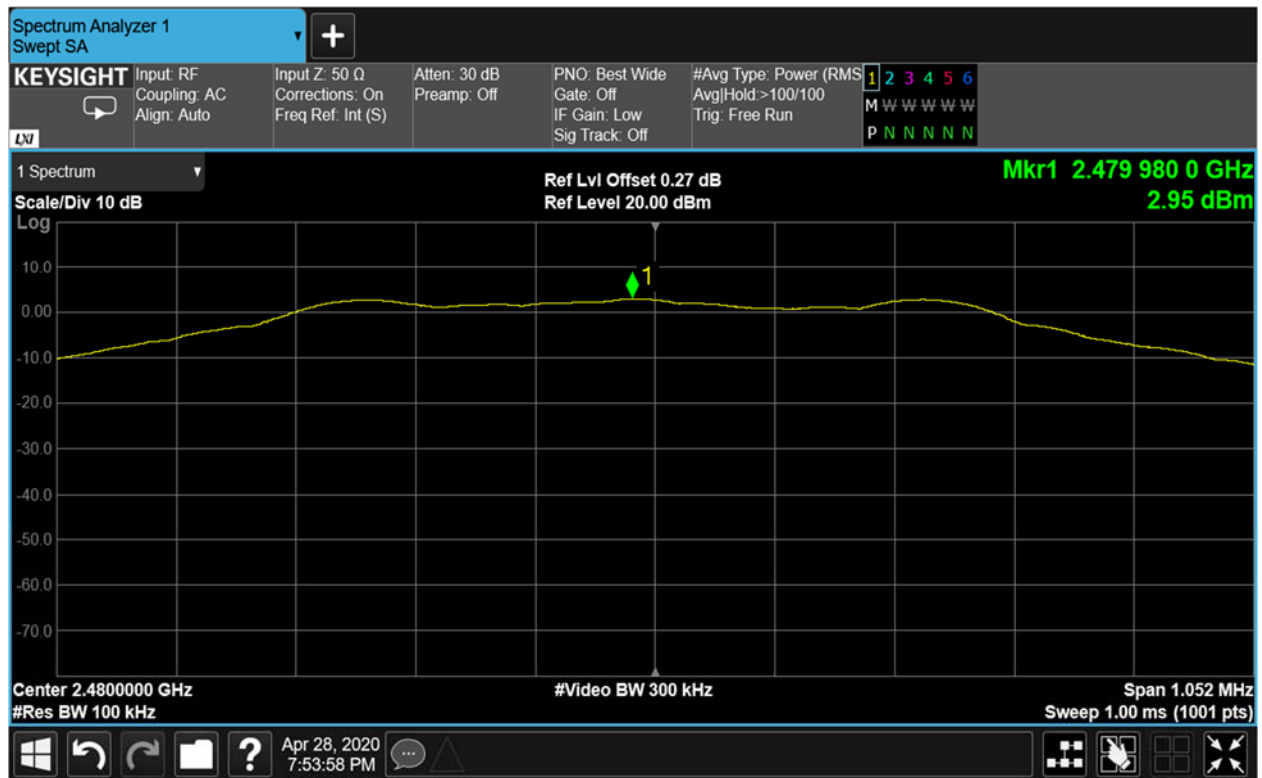


Figure 9-13 Power Spectral Density (Ch. 39)

9.6 Conducted Spurious Emissions

9.6.1 Test Requirement:

FCC CFR 47 Rule Part 15.247 (d)

ISED RSS-247 [5.5]

9.6.2 Test Method:

Measurements were performed according to the procedure defined in KDB 558074 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 V05 and ANSI C63.10: 2013.

Spectrum Analyzer settings:

Identification of Reference Level:

RBW= 100 kHz

VBW \geq 3 x RBW

Trace Mode= Peak Detector (Max Hold)

Sweep time= Auto Couple

Span >1.5 times DTS Bandwidth

Peak Marker function to determine the max PSD level.

Conducted Spurious Emissions:

RBW= 1 MHz

VBW \geq 3 x RBW = 3 MHz

Trace Mode = Peak Detector (Max Hold)

Sweep time = Auto Couple

Span= 30 MHz- 12 GHz; 12 GHz – 25 GHz

Sweep Points = 30000

9.6.3 Limits:

All spurious emissions at least 20 dBc.

9.6.4 Test Result:

Channel	Carrier Frequency (MHz)	Emission Frequency (MHz)	Emissions Amplitude (dBm/MHz)	Limit (dBm)	Margin (dB)	Result
0	2402	3177.000	-37.27	-16.70	-20.57	Pass
0	2402	24803.3	-34.90	-16.84	-19.80	Pass
19	2440	11550.700	-37.18	-17.05	-20.13	Pass
19	2440	24803.300	-34.90	-16.70	-18.20	Pass
39	2480	24873.000	-35.75	-16.84	-18.91	Pass
39	2480	24784.200	-35.51	-17.05	-18.46	Pass

9.6.5 Test Data:



Figure 9-14 Reference Level Measurement (Ch.0)

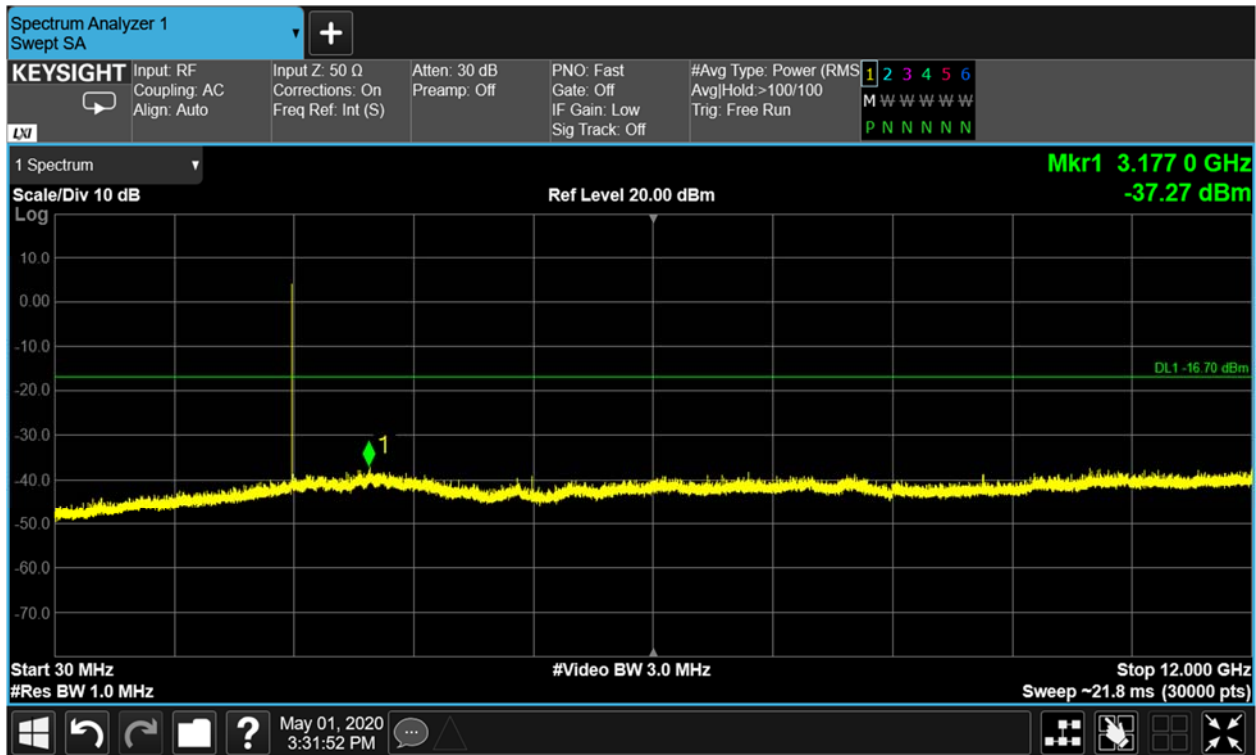


Figure 9-15 Conducted Spurious Emissions 30-12000 MHz (Ch. 0)

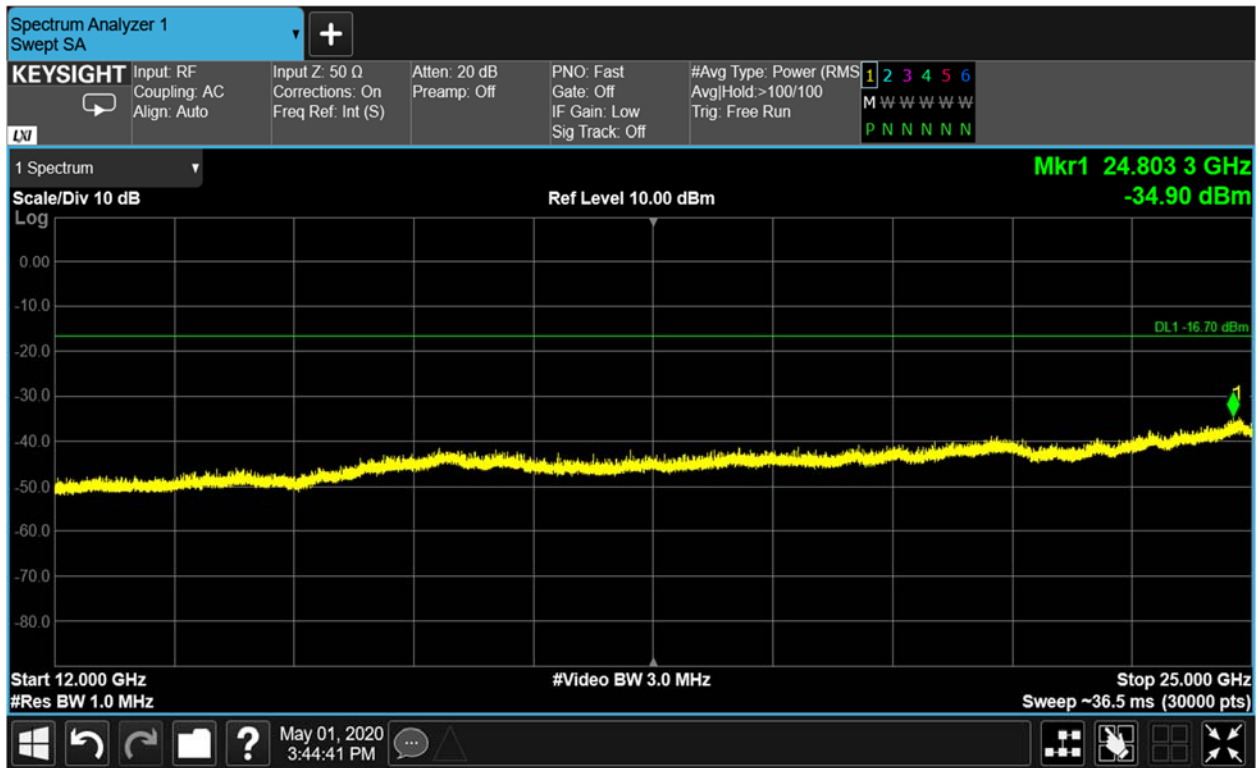


Figure 9-16 Conducted Spurious Emissions 12-25 GHz (Ch.0)

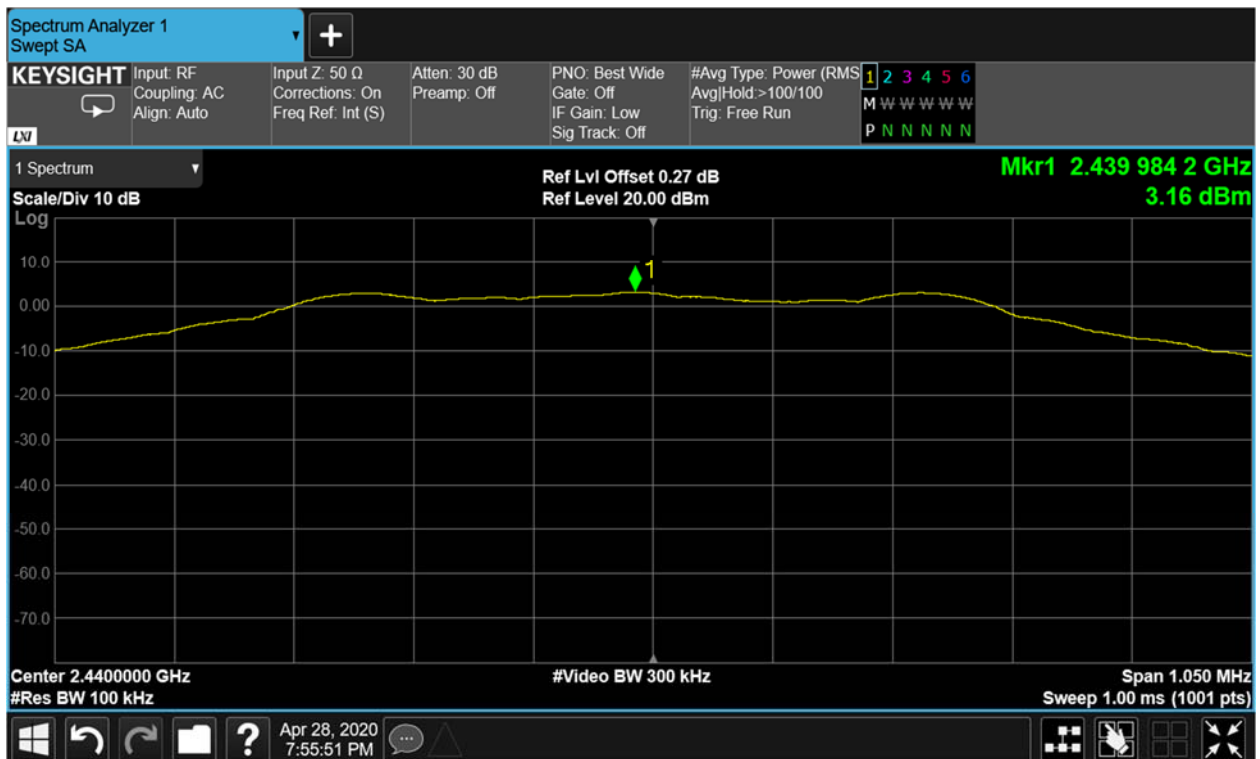


Figure 9-17 Reference Level Measurement (Ch.19)

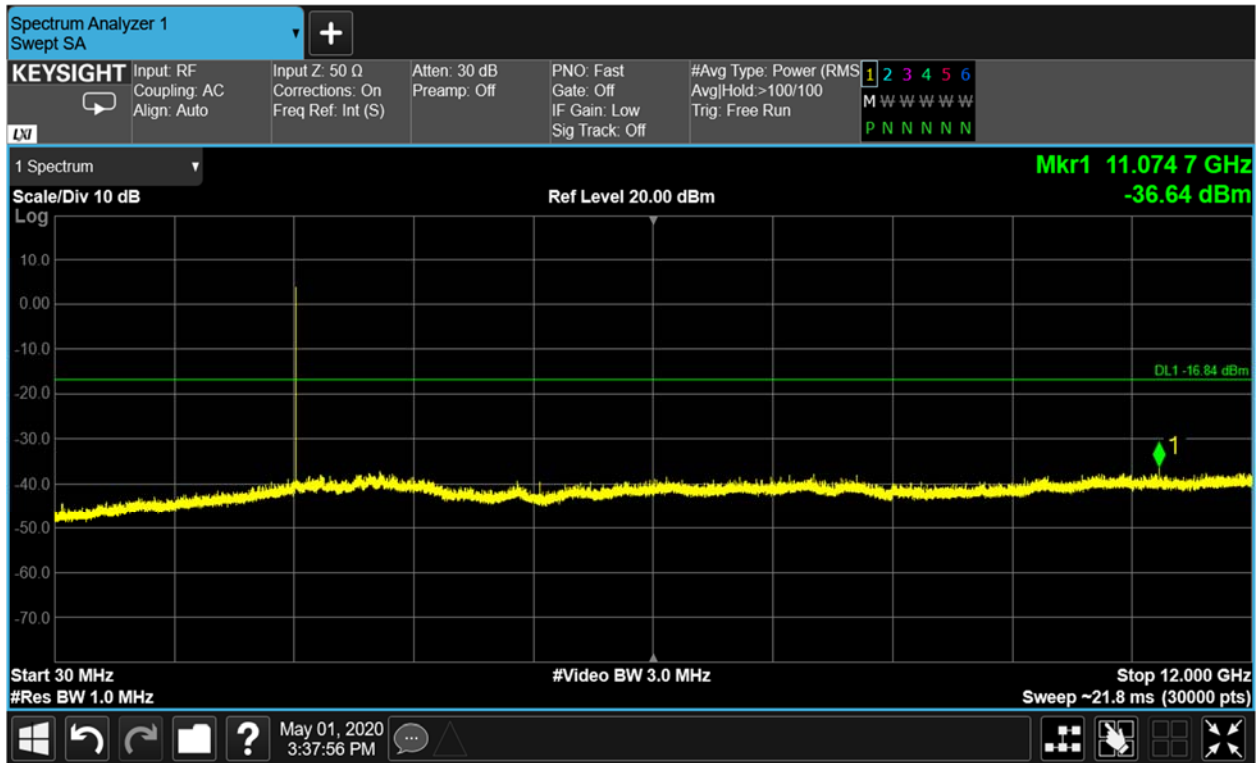


Figure 9-18 Conducted Spurious Emissions 30-12000 MHz (Ch. 19)

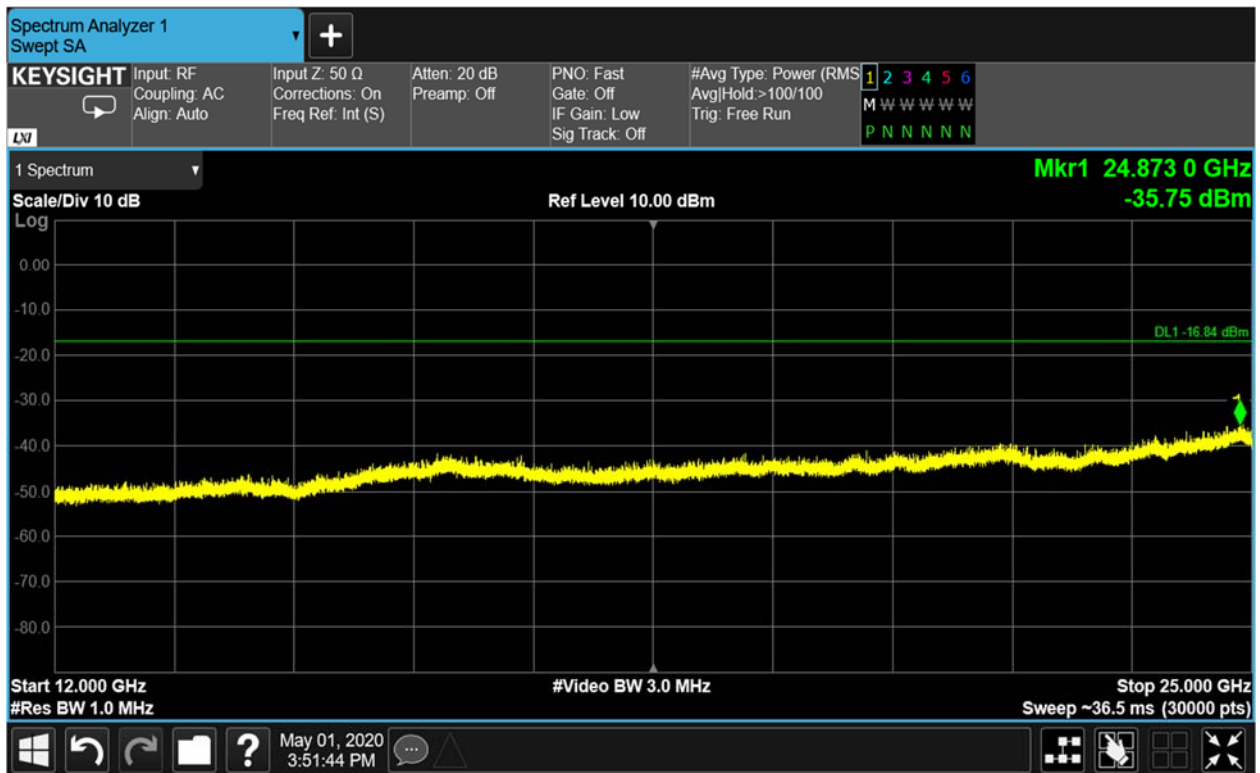


Figure 9-19 Conducted Spurious Emissions 12-25 GHz (Ch. 19)

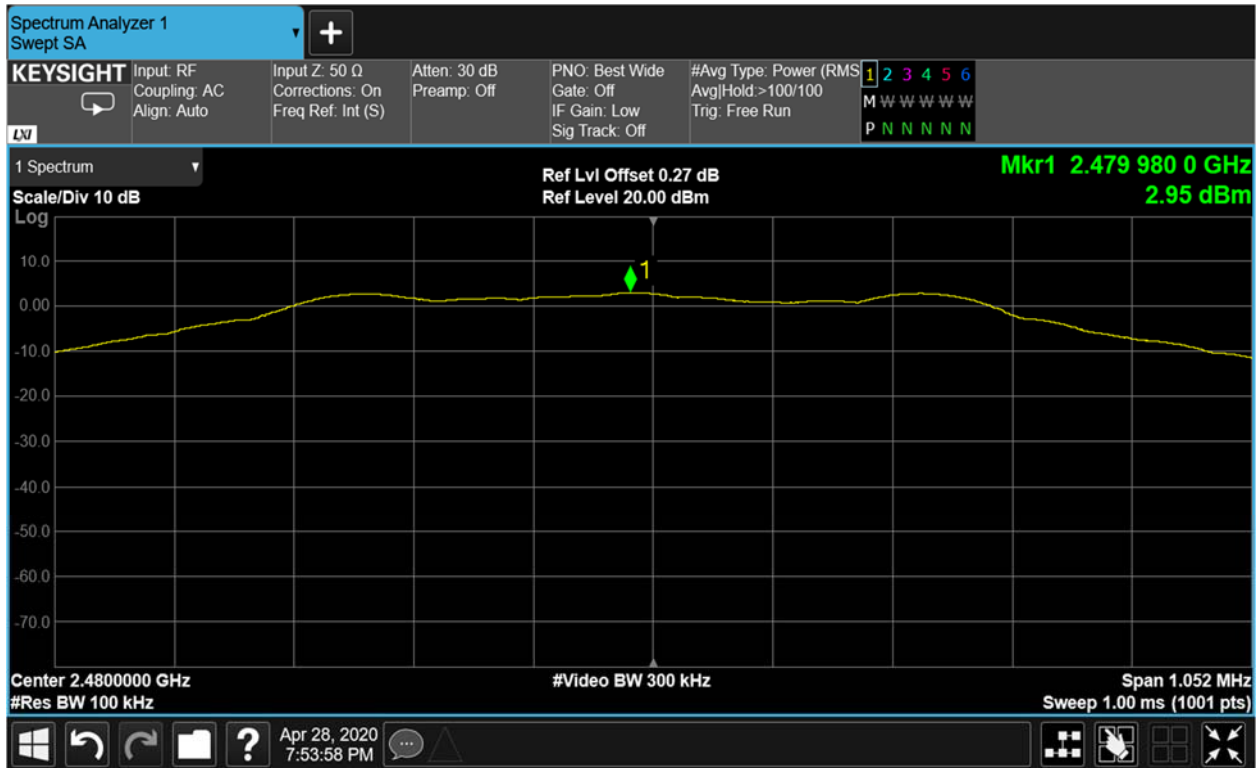


Figure 9-20 Reference Level Measurement (Ch.39)

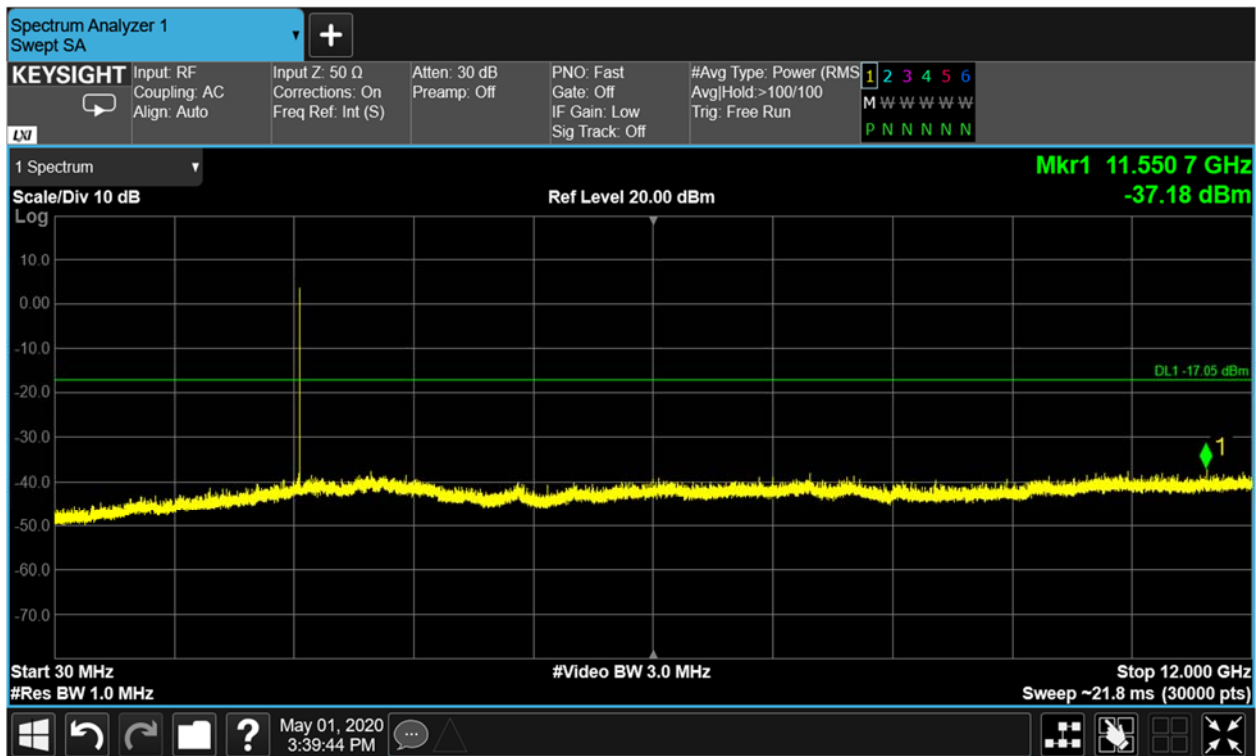


Figure 9-21 Conducted Spurious Emissions 30-12000 MHz (Ch.39)

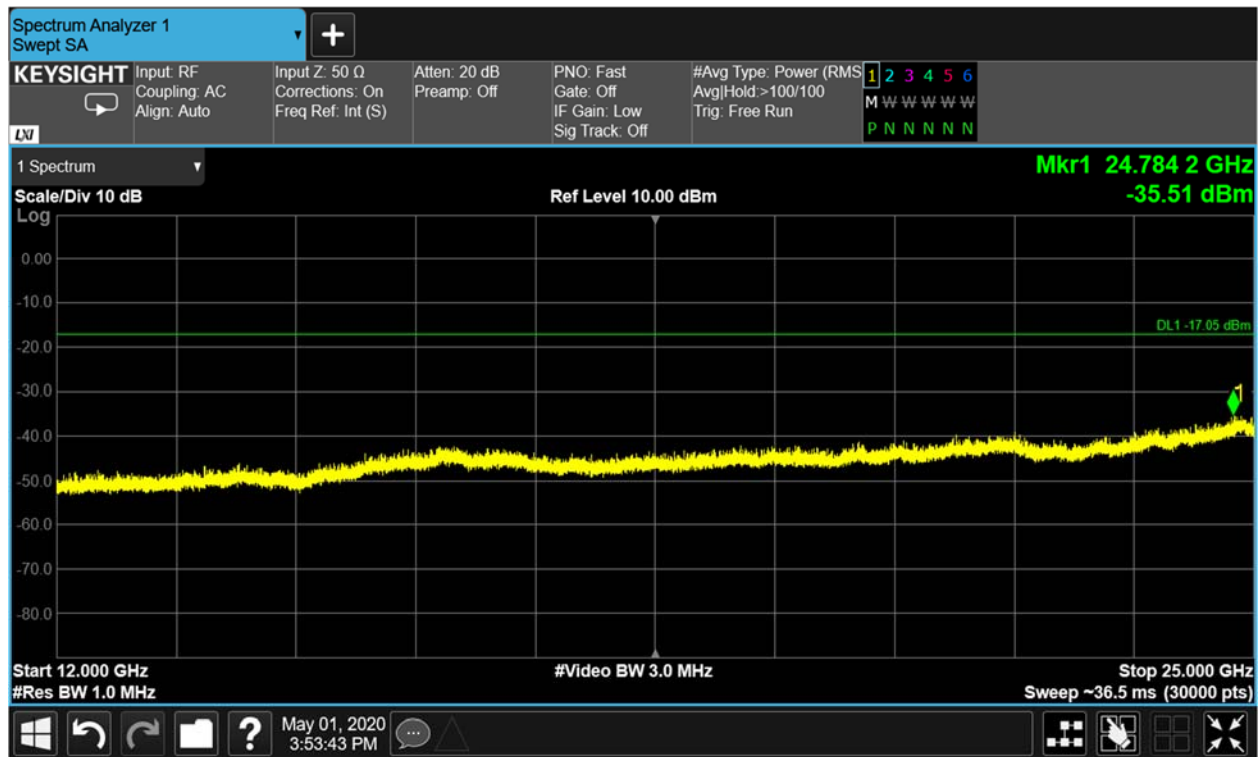


Figure 9-22 Conducted Spurious Emissions 12-25GHz (Ch.39)

9.7 Conducted Band Edge Emissions

9.7.1 Test Requirement:

FCC CFR 47 Rule Part 15.247 (d)

ISED RSS-247 [5.5]

9.7.2 Test Method:

Measurements were performed according to the procedure defined in KDB 558074 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 V05 and ANSI C63.10: 2013.

Spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW = 100 kHz

VBW = 300 kHz

Sweep = Auto Couple

Detector function = Peak

Trace = Max Hold

The trace was allowed to stabilize. The marker was set on the emission at the band edge, or on the highest modulation product outside of the band if this level is greater than that at the band edge. The delta marker function was set, and the marker-to-peak function moved to the peak of the in-band emission.

9.7.3 Limits:

All spurious emissions at least 20dBc.

9.7.4 Test Result:

Pass.

9.7.5 Test Data:

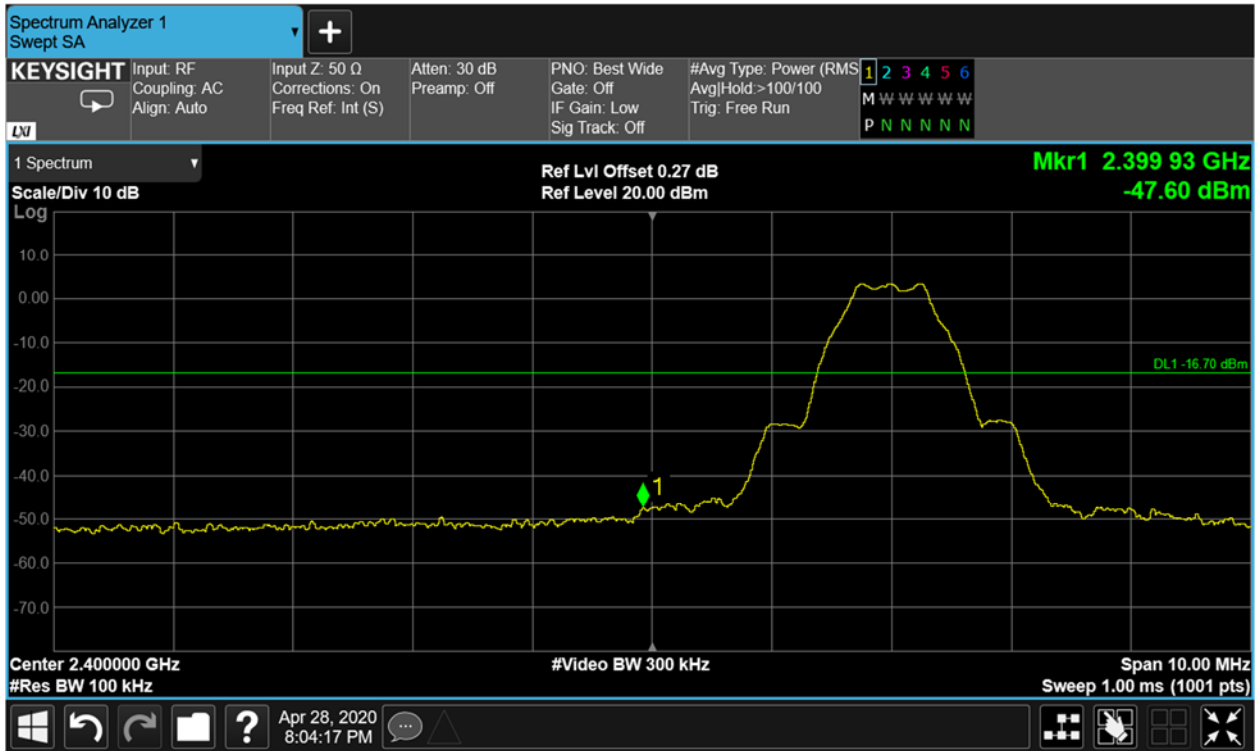


Figure 9-23 Conducted-Low Band Edge (Ch. 0)

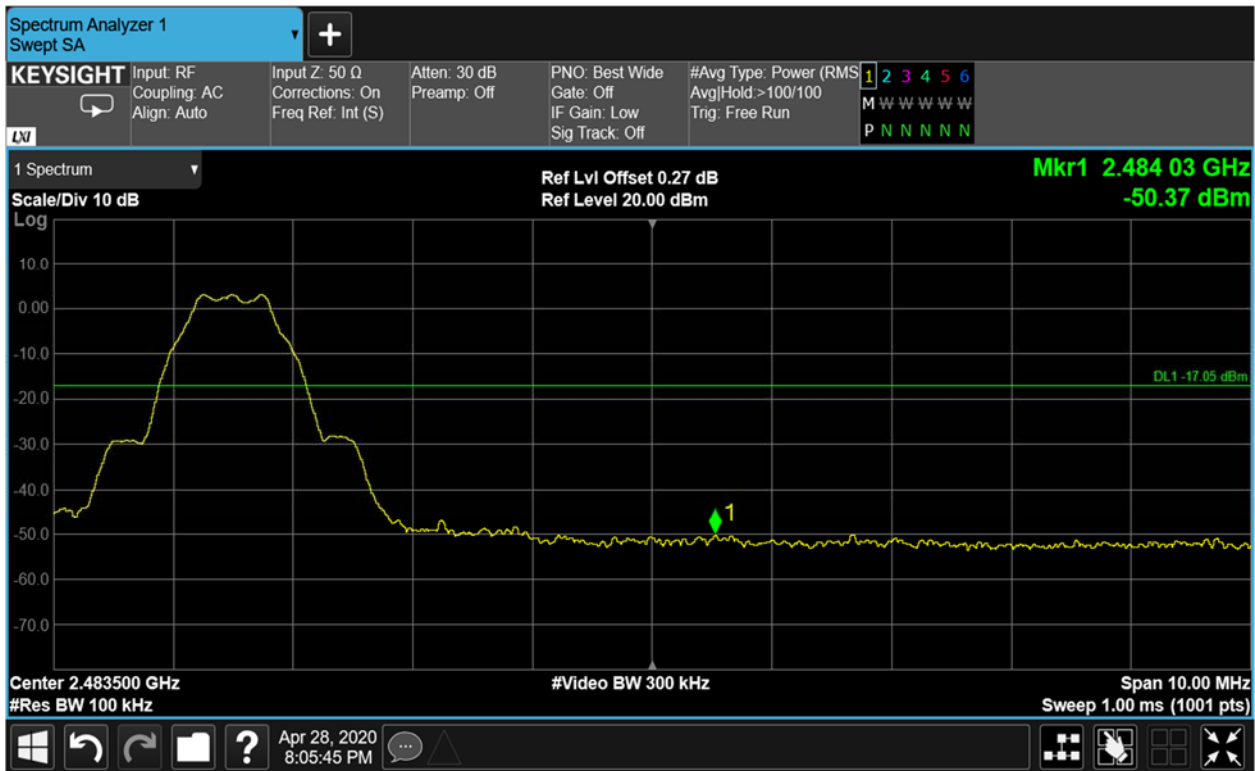


Figure 9-24 Conducted- High Band Edge (Ch. 39)

9.8 Radiated Spurious and Band Edge Emissions

9.8.1 Test Requirement:

FCC CFR 47 Rule Part 15.247 (d)

ISED RSS-247 [5.5] and RSS GEN [8.9]

9.8.2 Test Method:

Measurements were performed according to the procedure defined in KDB 558074 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 V05 and ANSI C63.10: 2013.

Radiated spurious measurements are made from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The limit for radiated spurious emissions is per 15.209 and RSS-247 [5.5]. Additionally, emissions found in the restricted bands listed in 15.205 and RSS-Gen were tested for compliance per limits in 15.209 and RSS-Gen.

The EUT was tested near the low, middle and high channels of operation. Guidelines in ANSI C63.10:2013 were followed with respect to maximizing the emissions.

A pre-amp and a high pass filter were required for this test, to provide the measuring system with sufficient sensitivity. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength.

Both horizontal and vertical antenna polarizations were investigated. Worst-case maximized data for both polarizations is shown in this test report.

Radiated Spurious Emissions**Spectrum Analyzer Settings:****9 kHz- 30 MHz:**

RBW= 1 kHz | 10kHz

VBW \geq 3 X RBW

Trace Mode: Peak Detector (Max Hold). Final measurements performed using QP Detector and RBW's as defined in ANSI C63.2.

Span= 9 kHz – 150 kHz and 150 kHz- 30 MHz

Sweep time= Auto

30 MHz- 1 GHz:

RBW = 120 kHz

VBW \geq 3 X RBW

Trace Mode: Peak Detector (Max Hold). Final measurements performed using QP Detector.

Span= 30 MHz - 1 GHz

Sweep time= Auto

Sweep points \geq 2 x Span/RBW**Above 1 GHz:**

RBW= 1 MHz

VBW= 3 MHz

Trace Mode: Peak Detector (Max Hold) and RMS Average Detector (Max Hold)

Span= 1 - 18 GHz and 18 - 26.5 GHz.

Sweep time= Auto

Sweep points \geq 2 x Span/RBW

Final Measurements above 1 GHz**Peak Measurements****Spectrum Analyzer Settings:**

RBW= 1 MHz

VBW= 3 MHz

Trace Mode: Peak Detector (Max Hold)

Span= wide enough to encompass the emission

Sweep Points $\geq 2 \times \text{Span}/\text{RBW}$

Sweep Time = Auto

RMS Average Measurements**Spectrum Analyzer Settings:**

RBW = 1 MHz

VBW $\geq 3 \times \text{RBW}$

Detector = RMS

Span = wide enough to encompass the emission

Sweep points $\geq 2 \times \text{Span}/\text{RBW}$

Sweep time = auto

Trace = Average at least 100 traces

Trace Averaging Type= power (RMS)

The duty cycle correction factor is added to the emission level.

Restricted Band-Edge Emissions**Peak Measurements****Spectrum Analyzer Settings:**

RBW = 1 MHz

VBW = 3 MHz

Trace Mode: Peak Detector (Max Hold)

Span = 2310 – 2500 MHz

Sweep Points = 401

Sweep Time = Auto

Average Measurements**Spectrum Analyzer Settings:**

RBW= 1 MHz

VBW= 3 MHz

VBW Mode = Linear

Trace Mode: RMS Detector (Average)

Span= 2310 – 2500 MHz

Sweep Points = 401

Sweep Time = Auto

Sweep Count = 200

Sample Calculation:

Field Strength Level: Amplitude (Analyzer level) + AFCL (Antenna Factor and Cable losses) –
Amplifier Gain = 50dBuV + 33 dB – 25 dB = 58dBuV/m

9.8.3 Limits:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (meters)	Corrected Field Strength for 3m measurement distance ($\text{dB}\mu\text{V}/\text{m}$)
0.009-0.490	2400/F (kHz)	300	48.5 - 13.8
0.490-1.705	24000/F (kHz)	30	33.8- 23.0
1.705-30	30	30	29.5
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
960-1000	500	3	54
Above 1000 (Restricted Frequency Bands)	500	3	54 (Average) 74 (Peak)
<p>The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y $\text{dB}\mu\text{V}/\text{m}$, which is equivalent to $Y-51.5 = Z \text{ dB}\mu\text{A}/\text{m}$, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.</p>			

9.8.4 Test Result:

Pass.

9.8.5 Test Data:

9.8.5.1 Radiated Restricted Band-edge emissions

RSE 1 - 18GHz Average Data							
Carrier Frequency (MHz)	Frequency (MHz)	Raw Avg. Amplitude (dBμV)	Correction Factor (dB)	DC Correction Factor (dB)	Corrected Avg. Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
2402	2390.00	29.63	13.10	2.23	44.96	54	-9.04
2480	2483.65	30.73	13.60	2.23	46.56	54	-7.44

RSE 1 - 18GHz Peak Data						
Carrier Frequency (MHz)	Frequency (MHz)	Raw Peak Amplitude (dBμV)	Correction Factor (dB)	Corrected Peak Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
2402	2374.98	39.33	13.1	52.43	74	-21.57
2480	2484.80	40.7	13.6	54.30	74	-19.70



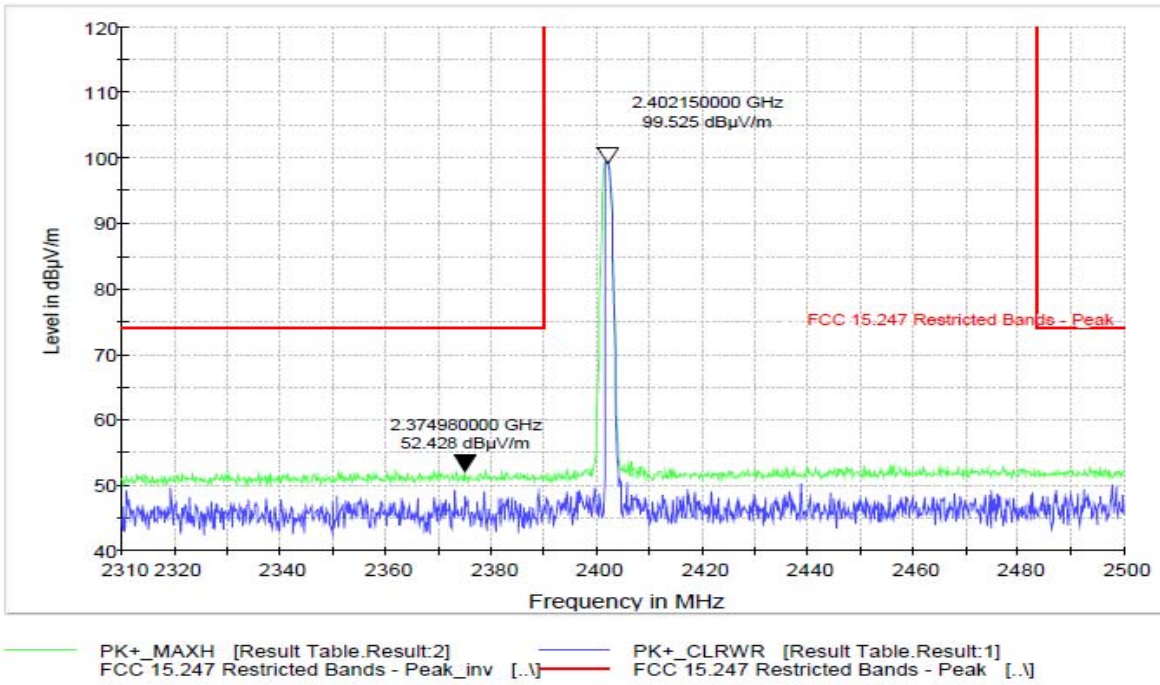


Figure 9-25 Radiated Restricted Band Edge (Ch. 0) Peak

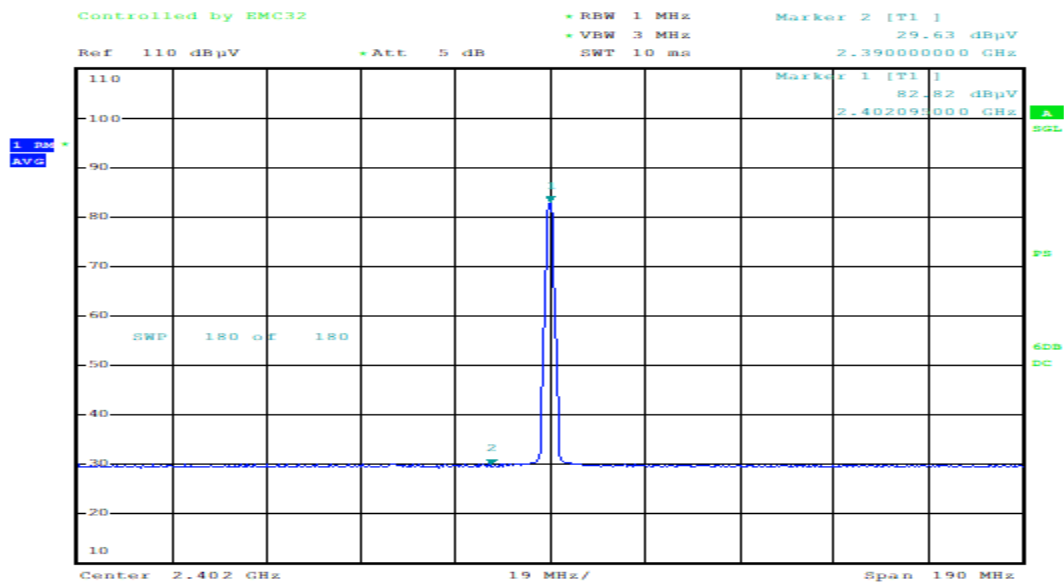


RF-24888
Date: 2.MAY.2020 06:46:14

Figure 9-26 Radiated Restricted Band Edge (Ch. 0) Average

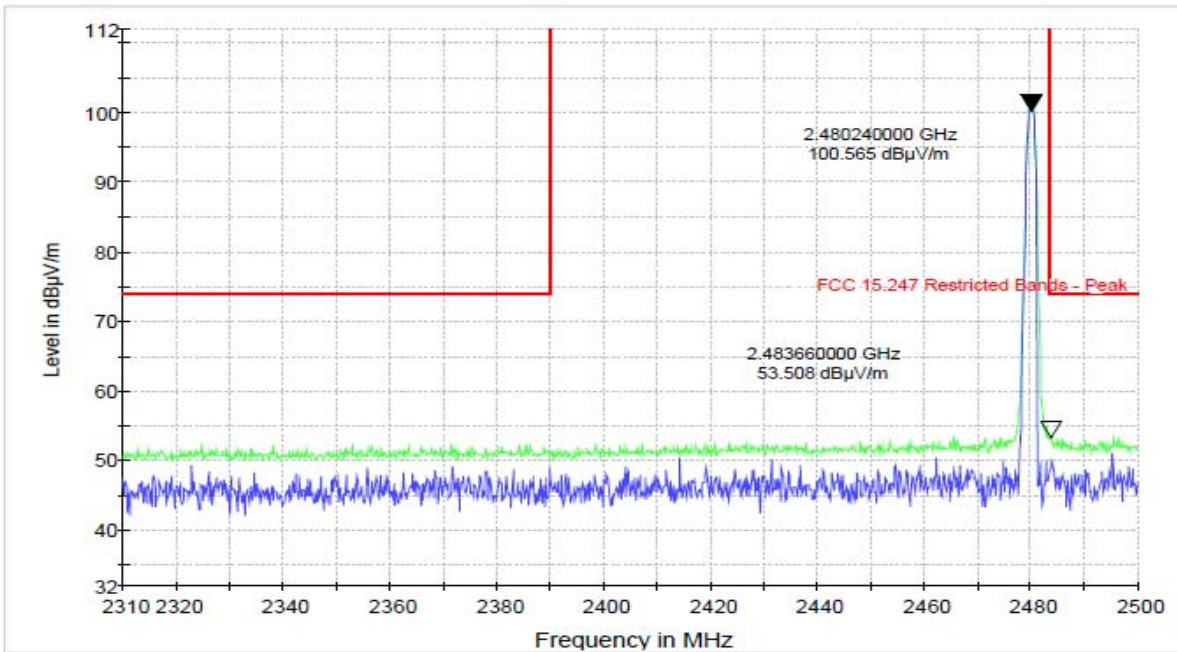

PK+ MAXH [Result Table.Result:2] PK+ CLRWR [Result Table.Result:1]
FCC 15.247 Restricted Bands - Peak_inv [...] FCC 15.247 Restricted Bands - Peak [...]

Figure 9-27 Radiated Restricted Band Edge (Ch. 39) Peak

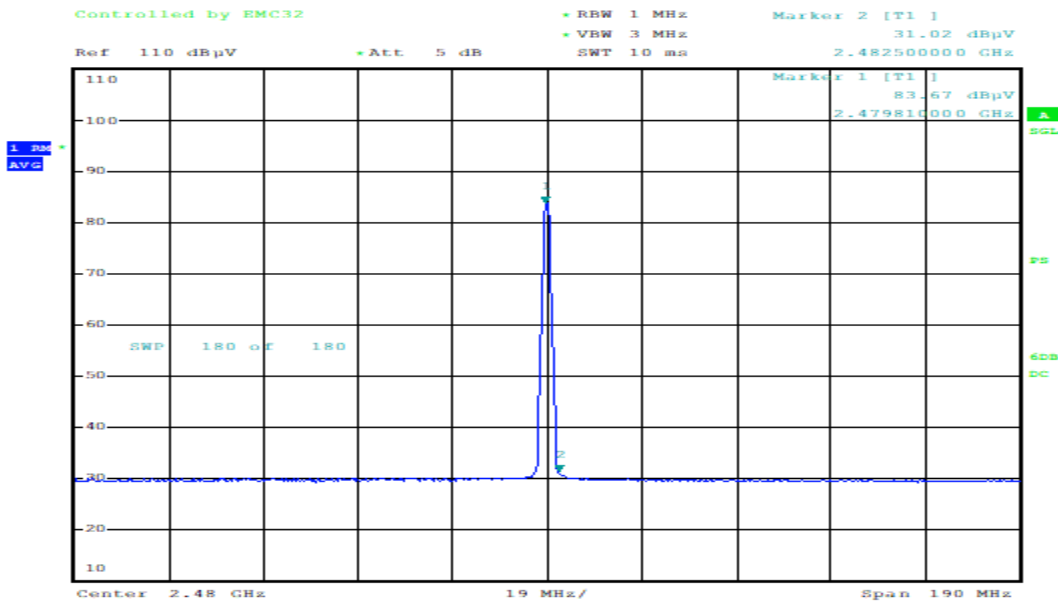

RF-24888

Date: 2.MAY.2020 06:27:05

Figure 9-28 Radiated Restricted Band Edge (Ch. 39) Average

9.8.5.2 Emissions in 9kHz-1GHz range

All channels and polarizations were tested and worst-case results from channel 0 with Perpendicular orientation shown here.

RSE 9kHz -30 MHz						
Carrier Frequency (MHz)	Emission Frequency (MHz)	Raw Quasi-Peak Amplitude (dB μ V/m)	Correction Factor (dB)	Corrected Quasi-Peak Field Strength (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Quasi-Peak Margin (dB)
2440	0.15546	-0.27	-17.2	-17.47	23.77	-41.24
2440	0.526	-4.05	11.8	7.75	33.18	-25.43
2440	11.904452	-14.11	-4.7	-18.81	29.54	-48.35

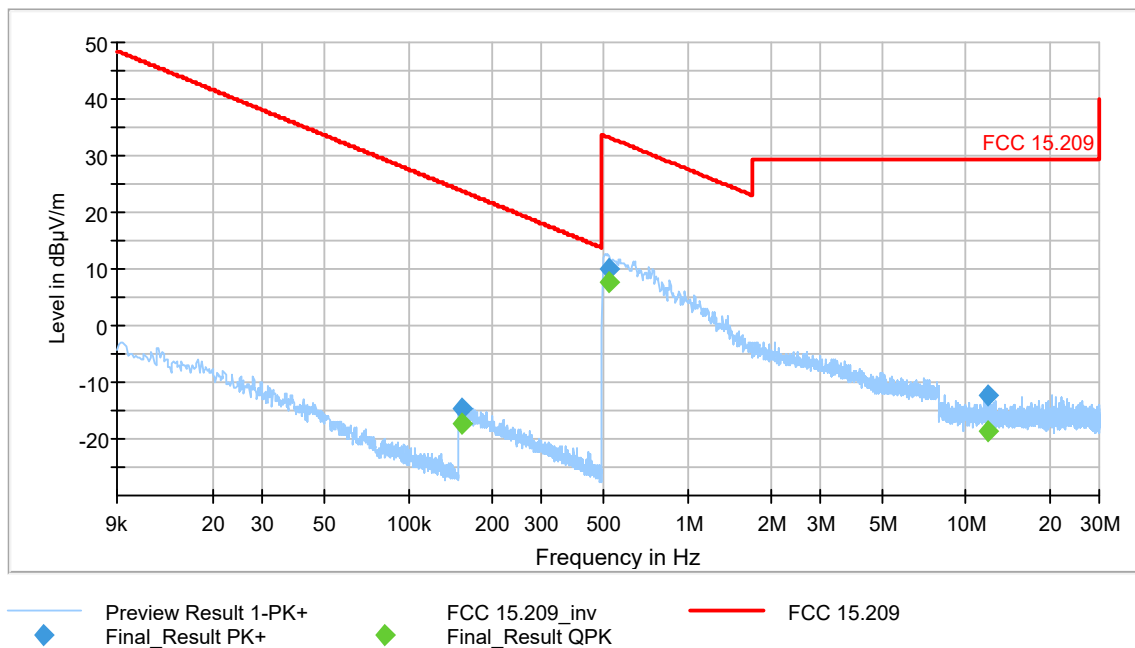


Figure 9-29 Radiated Spurious Emissions (Ch.0) 2440 (9kHz – 30MHz)

9.8.5.3 Emissions in 30 MHz- 1 GHz range

All channels were tested and worst-case results from channel 19 shown here.

RSE 30-1000 MHz						
Carrier Frequency (MHz)	Emission Frequency (MHz)	Raw Quasi-Peak Amplitude (dBμV/m)	Correction Factor (dB)	Corrected Quasi-Peak Field Strength (dBμV/m)	Quasi-Peak Limit (dBμV/m)	Quasi-Peak Margin (dB)
2440	931.8575	-1.7	31.7	30.7	46	-15.3

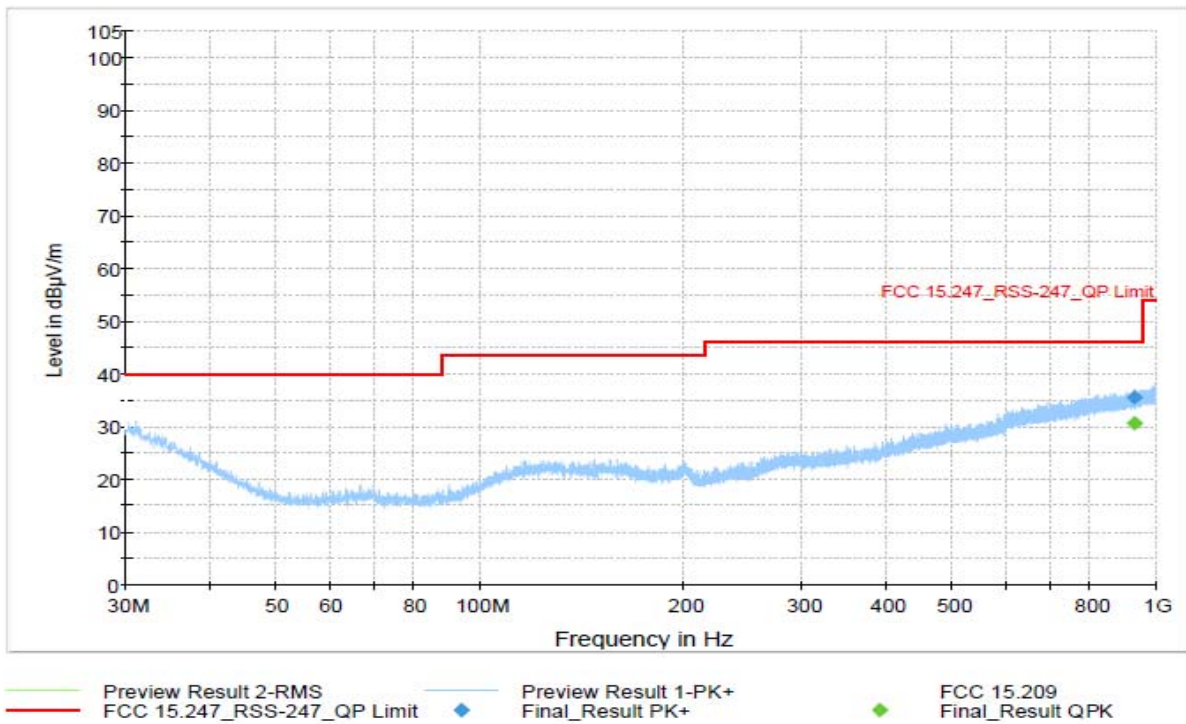


Figure 9-30 Radiated Spurious Emissions (Ch. 19) 2440 (30MHz - 1GHz)

9.8.5.4 Emissions in 1-18 GHz range

RSE 1 - 18GHz Average Data							
Carrier Frequency (MHz)	Frequency (MHz)	Raw Avg. Amplitude (dBμV)	Correction Factor (dB)	DC Correction Factor (dB)	Corrected Avg. Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
2402	3256*	32.8	7.1	0	39.90	54	-14.10
2402	4803.5	38.75	8.9	2.23	49.88	54	-4.12
2402	17623.7	20.85	23.6	0	44.45	54	-9.55
2440	3256*	33.78	7.1	0	40.88	54	-13.12
2440	4880.5	37.78	8.7	2.23	48.71	54	-5.29
2440	17998.5	20.5	24.8	0	45.30	54	-8.70
2480	3256*	32.25	7.1	0	39.35	54	-14.65
2480	4959.9	37.58	8.9	2.23	48.71	54	-5.29
2480	18000	20.54	24.8	0	45.34	54	-8.66

Note 1: Frequencies marked with (*) do not fall in the restricted band

RSE 1 - 18GHz Peak Data						
Carrier Frequency (MHz)	Frequency (MHz)	Raw Peak Amplitude (dBµV)	Correction Factor (dB)	Corrected Peak Field Strength (dBµV/m)	Peak Limit (dBµV/m)	Margin (dB)
2402	3256*	40.70	7.1	47.8	74	-26.20
2402	4803.5	43.45	8.9	52.35	74	-21.65
2402	17623.7	32.49	23.6	56.09	74	-17.91
2440	3256*	40.12	7.1	47.22	74	-26.78
2440	4879.9	42.90	8.7	51.60	74	-22.40
2440	17983.3	32.15	24.3	56.45	74	-17.55
2480	3256*	40.07	7.1	47.17	74	-26.83
2480	4959.5	42.97	8.9	51.87	74	-22.13
2480	17993.3	32.66	24.6	57.26	74	-16.74

Note 1: Frequencies marked with (*) do not fall in the restricted band

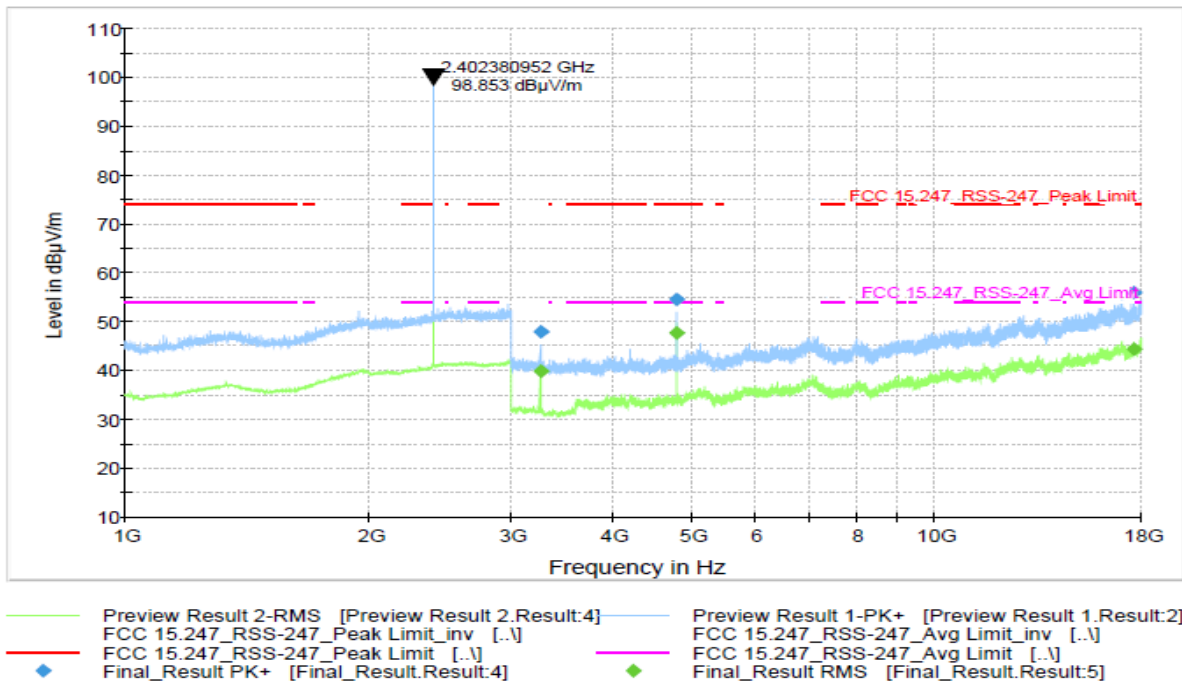


Figure 9-31 Radiated Spurious Emissions 1-18 GHz (Ch. 0)

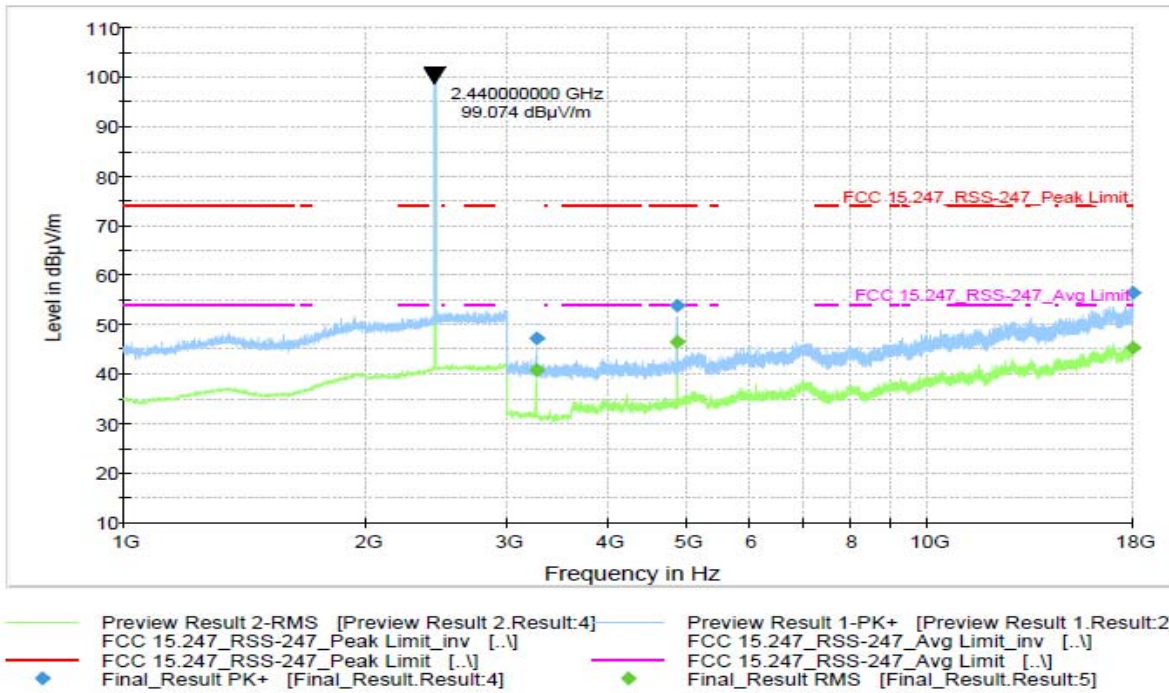


Figure 9-32 Radiated Spurious Emissions 1-18 GHz (Ch. 19)

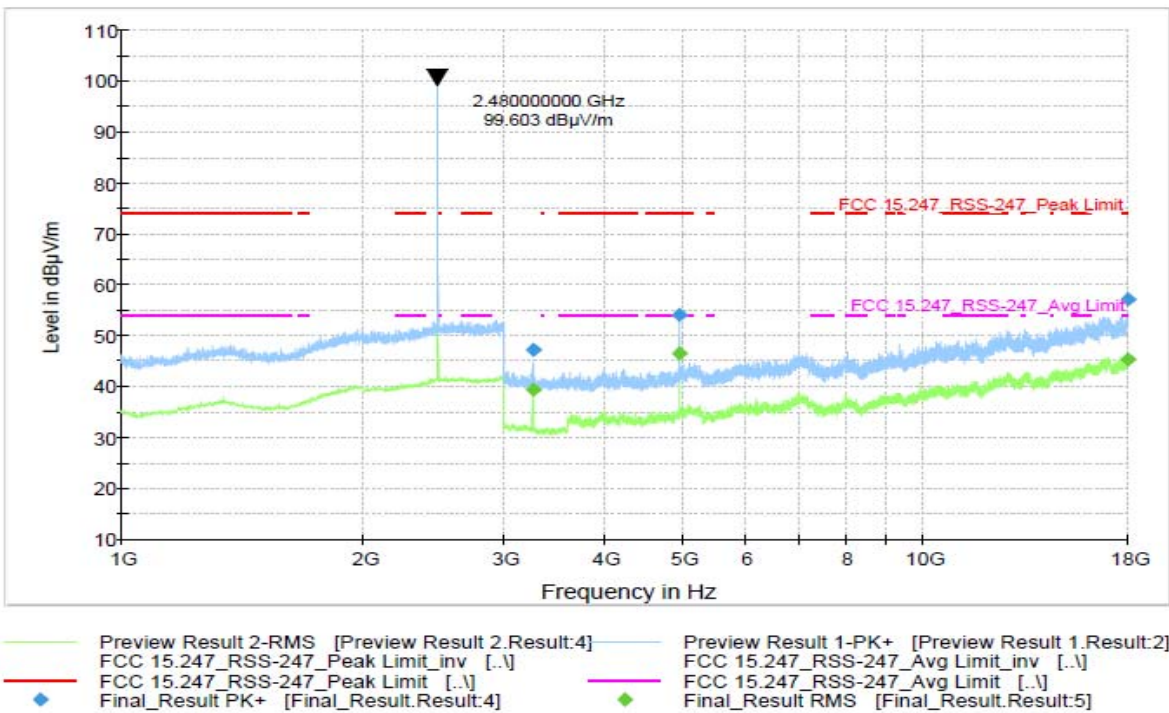


Figure 9-33 Radiated Spurious Emissions 1-18 GHz (Ch. 39)

9.8.5.5 Emissions in 18-26.5 GHz range

All channels were tested and worst-case results from channel 19 (2440 MHz) shown here. No significant emissions to report above noise floor.

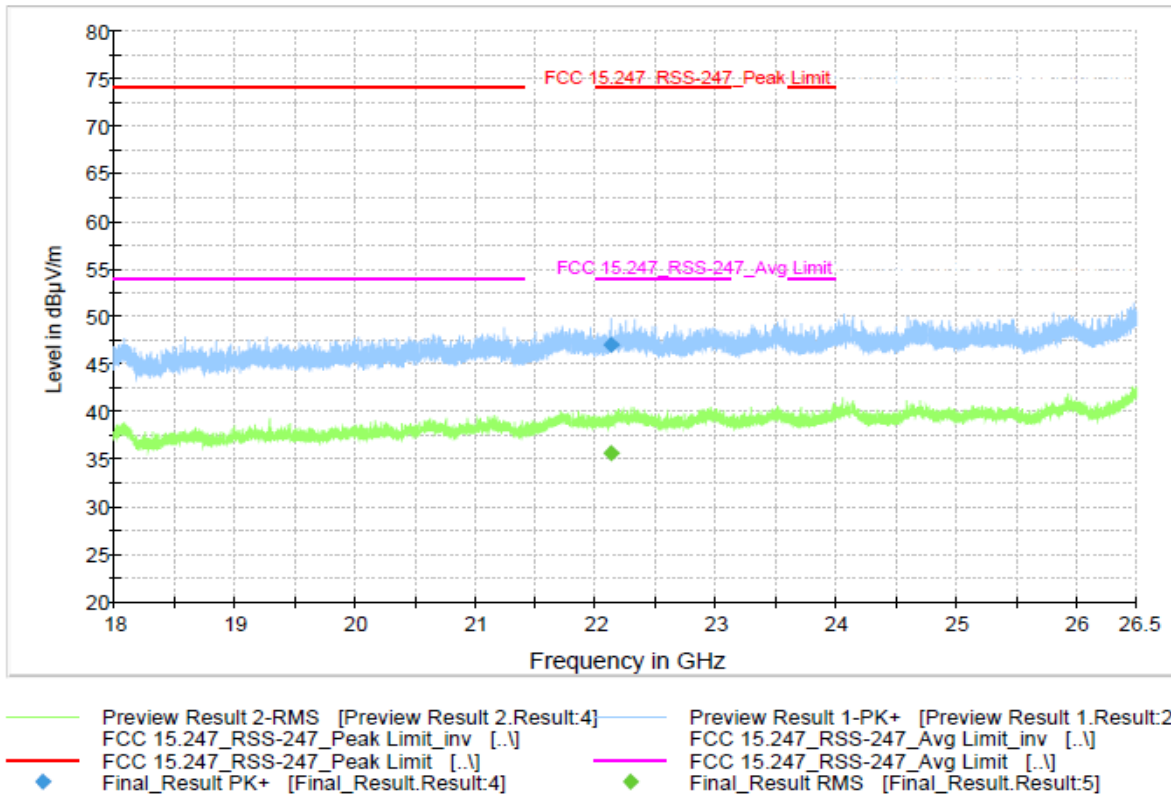


Figure 9-34 Radiated Spurious Emissions (Ch. 19) (18 – 26.5 GHz)

9.9 AC Line Conducted Emissions

9.9.1 Test Requirements

FCC CFR 47 Rule Part 15.207 (a)

ISED RSS Gen [8.8]

9.9.2 Test Method

Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the unsymmetric radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with the power cords that are used under normal operating conditions. These measurements are made using a LISN (Line Impedance Stabilization Network). AC powered peripherals are attached to a second LISN with the 50-ohm measuring port terminated by a 50 ohm resistive load.

The EUT is set to continuously transmit on Ch.19 at 4dBm power setting.

EMI Receiver Settings:

150 kHz – 30 MHz:

RBW= 9 kHz

VBW \geq 3 X RBW

Trace Mode: Peak Detector (Max Hold).

Final measurements were performed using Quasi-Peak and Average Detectors.

Span= 150 kHz – 30 MHz

Sweep time= Auto

9.9.3 Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

9.9.4 Test Result:

Pass

9.9.5 Test Data:

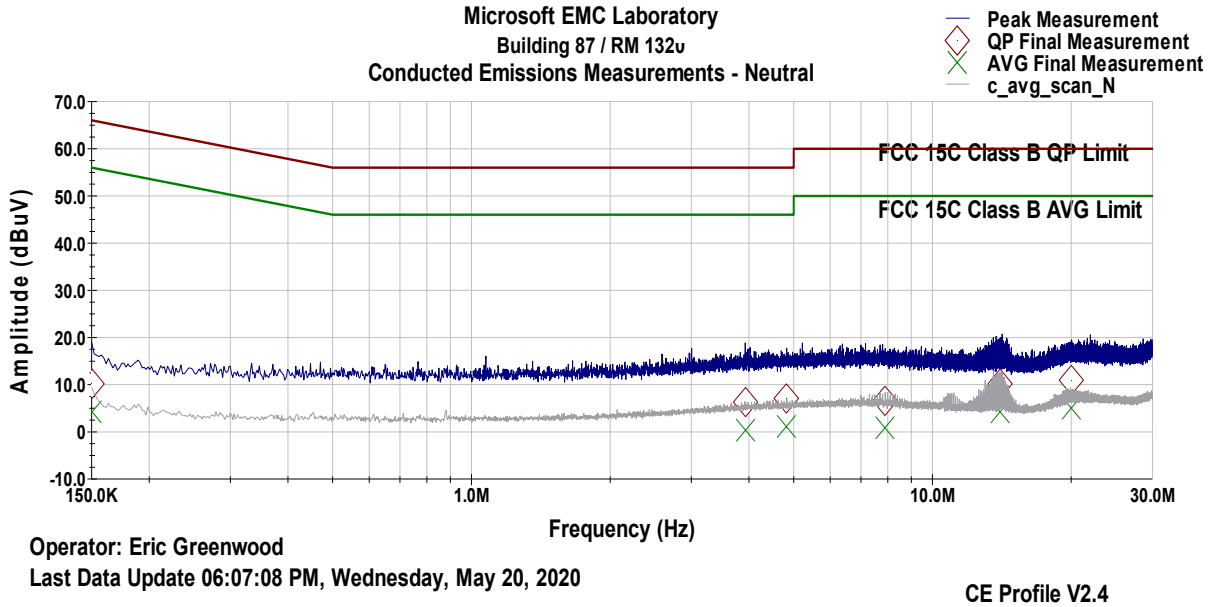


Figure 9-35 AC Line Conducted Emissions- Neutral (150 kHz- 30 MHz)

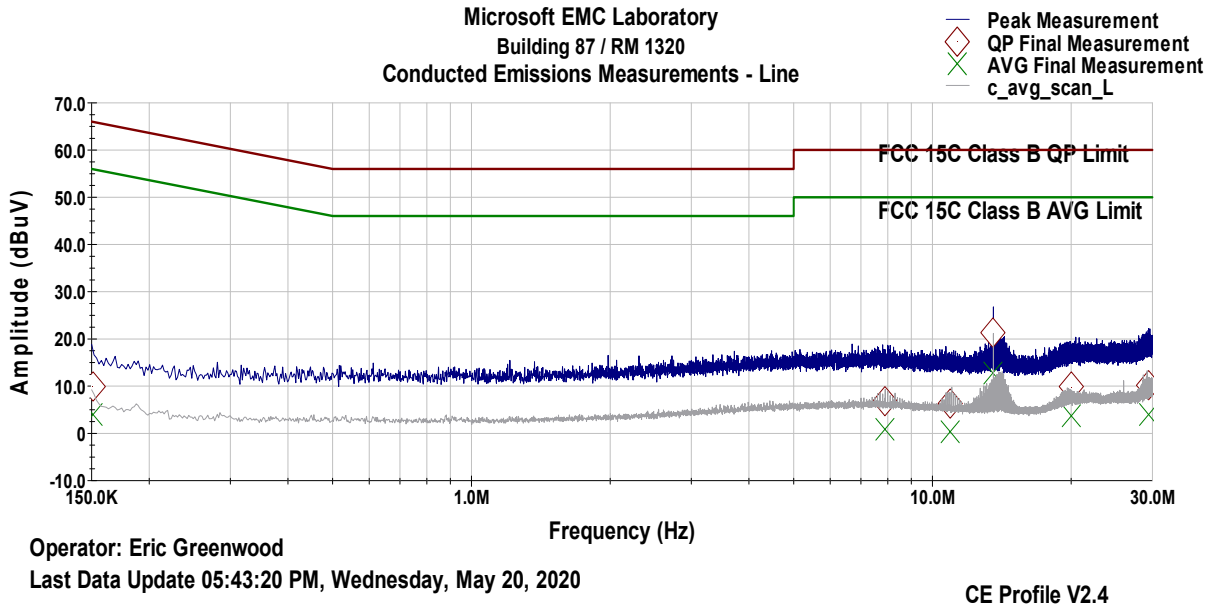


Figure 9-36 AC Line Conducted Emissions- Line (150 kHz- 30 MHz)

Frequency (MHz)	QP Net Reading (dB μ V)	AVG Net Reading (dB μ V)	Quasi-Peak Limit (dB μ V)	Average Limit (dB μ V)	Line Tested (L or N)	Quasi-Peak Margin (dB)	Average Margin (dB)
0.151	9.97	4.02	65.96	55.96	L	-55.99	-51.94
7.890	6.91	0.74	60.00	50.00	L	-53.09	-49.26
10.902	6.33	0.37	60.00	50.00	L	-53.67	-49.63
13.560	21.22	12.89	60.00	50.00	L	-38.78	-37.11
19.999	9.81	3.77	60.00	50.00	L	-50.19	-46.23
29.434	10.25	4.02	60.00	50.00	L	-49.75	-45.98
0.150	10.18	4.33	66.00	56.00	N	-55.82	-51.67
3.926	6.23	0.30	56.00	46.00	N	-49.77	-45.70
4.830	7.16	1.03	56.00	46.00	N	-48.84	-44.97
7.891	6.65	0.79	60.00	50.00	N	-53.35	-49.21
14.000	10.17	4.28	60.00	50.00	N	-49.83	-45.72
19.999	10.86	4.98	60.00	50.00	N	-49.14	-45.02

End of Report