



# RADIO TEST REPORT

For

MODEL NO.: 1914

FCC ID: C3K1914

IC ID: 3048A-1914

Test Report No. R-TR623-FCCISED-DFS-1

Issue Date: June 1, 2020

FCC CFR47 Part 15 Subpart E  
Innovation, Science and Economic Development  
Canada RSS-247 Issue 2

*Prepared by*

Microsoft EMC Laboratory  
17760 NE 67th Ct,  
Redmond WA, 98052, U.S.A.  
425-421-8641

[dasalina@microsoft.com](mailto:dasalina@microsoft.com)



TESTING CERT #3472.01

## 1 Record of Revisions

<b>Revision</b>	<b>Date</b>	<b>Section</b>	<b>Page(s)</b>	<b>Summary of Changes</b>	<b>Author/Revised By:</b>
1.0	06/01/2020	All	All	Version 1.0	Jems Pradhan

## Table of Contents

1	Record of Revisions.....	2
2	Deviations from Standards .....	6
3	Facilities and Accreditations .....	6
3.1	Test Facility .....	6
3.2	Accreditations .....	6
4	Product Description .....	7
4.1	Test Configurations .....	8
4.2	Environmental Conditions.....	8
4.3	Antenna Requirements.....	8
4.4	Equipment Modifications .....	8
4.5	Dates of Testing .....	8
5	Test Results Summary .....	9
6	Test Equipment List.....	10
7	Test Method.....	11
7.1	Antenna port conducted measurements.....	11
7.2	Test Setup Diagrams.....	11
7.3	Radar Waveform Verification.....	12
7.4	Channel Loading .....	17
7.4.1	Test Method .....	17
8	Test Results.....	19
8.1	Channel Move Time .....	19
8.1.1	Test Requirement:.....	19
8.1.2	Test Method: .....	19
8.1.3	Limits: .....	19
8.1.4	Test Results: .....	19
8.1.5	Test Data.....	19
8.2	Channel Closing Transmission Time.....	22
8.2.1	Test Requirement:.....	22
8.2.2	Test Method: .....	22
8.2.3	Limits: .....	22
8.2.4	Test Results: .....	22
8.2.5	Test Data.....	22
8.3	Non-Occupancy Period .....	24

8.3.1	Test Requirement:.....	24
8.3.2	Test Method: .....	24
8.3.3	Limits: .....	24
8.3.4	Test Results: .....	24
8.3.5	Test Data:.....	24

# Test Report Attestation

**Microsoft Corporation****Model:** 1914**FCC ID:** C3K1914**IC ID:** 3048A-1914**Applicable Standards**

Specification	Test Result
FCC 47CFR Rule Parts 15.407 (DFS)	Pass
Innovation, Science and Economic Development Canada RSS-247 Issue 2 (DFS)	Pass

Microsoft EMC Laboratory attests that the product model identified in this report has been tested to and meets the requirements identified in the above standards. The test results in this report solely pertains to the specific sample tested, under the conditions and operating modes as provided by the customer.

This report shall not be used to claim product certification, approval, or endorsement by A2LA or any agency of any Government. Reproduction, duplication or publication of extracts from this test report is prohibited and requires prior written approval of Microsoft EMC Laboratory.



Written By: Jems Pradhan

RF Test Engineer



Reviewed/ Issued By: Daniel Salinas

RF Compliance Technical Manager

## 2 Deviations from Standards

None.

## 3 Facilities and Accreditations

### 3.1 Test Facility

All test facilities used to collect the test data are located at Microsoft EMC Laboratory,  
17760 NE 67<sup>th</sup> Ct,  
Redmond WA, 98052, USA

### 3.2 Accreditations

The lab is established and follows procedures as outlined in IEC/ISO 17025 and A2LA accreditation requirements.

A2LA Accredited Testing Certificate Number: 3472.01

FCC Registration Number: US1141

IC Site Registration Numbers: 3048A-3, 3048A-4

## 4 Product Description

Company Name:	Microsoft Corporation
Address:	One Microsoft Way
City, State, Zip:	Redmond, WA 98052-6399
Customer Contact:	Kyle Chen
Functional Description of the EUT:	Wireless Input device with 802.11 g/a/n 20 MHz Accessory, and Bluetooth Low Energy Radios
Model:	1914
FCC ID:	C3K1914
IC ID:	3048A-1914
Radio under test:	IEEE 802.11a/n supporting 20 MHz Bandwidths 5150- 5250 MHz, 5250-5350 MHz, 5470-5725 MHz and 5725- 5850 MHz.
Modulation(s):	OFDM – BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
EUT Classification:	UNII Client Device without radar detection
RF Conducted port impedance:	50 $\Omega$ in the frequency range of operation
Antenna Gain Measurement Verification:	N/A
Transmit Power Control:	The EUT does not implement TPC
Wireless Bridge or Mesh Capability:	The device does not implement bridge or mesh modes.
Power – Cycle Time:	N/A. The EUT is a client device without radar detection
Radar Waveform Information:	The EUT does not detect or store information regarding radar waveforms
Equipment Design State:	Prototype/Production Equivalent (DV)
Equipment Condition:	Good
Test Sample Details:	RF Conducted Test Sample: <b>SN: 09710001205012, Sample ID: R-623-DV-05</b>
Test Engineer:	Jems Pradhan

#### 4.1 Test Configurations

The device was setup in normal operation and connected wirelessly to Microsoft Model # 1787 on 20 MHz bandwidth channels. “Durango DFS” a test software provided by the customer was used to program the EUT channel, mode, Regulatory Domain, audio streaming and data rate.

Spectrum analyzer was used to monitor the traffic and perform the measurements. Vector Signal Generator was used to generate the Radar Pulses. Measurements were performed on the main antenna. DFS signals were injected into 5 GHz Tx/Rx port B of the Master device, Microsoft Model # 1787.

#### 4.2 Environmental Conditions

Ambient air temperature of the test site was within the range of 10 °C to 40 °C (50 °F to 104 °F) unless the EUT specified testing over a different temperature range. Humidity levels were in the range of 10% to 90% relative humidity. Testing conditions were within tolerance and any deviations required from the EUT are reported.

#### 4.3 Antenna Requirements

The antennas are internal, permanently attached and there are no provisions for connection to an external antenna.

Frequency Band (MHz)	Antenna Gain	
	Max Gain (dBi) Tx Antenna Chain 0	Max Gain (dBi) Rx Diversity Chain 1
UNII Band 1- 5150 to 5250	3.77	4.03
UNII Band 2a – 5250 to 5350	4.40	3.08
UNII Band 2c – 5470 to 5725	4.12	3.97
UNII Band 3 – 5725 to 5850	3.71	3.56

#### 4.4 Equipment Modifications

No modifications were made during testing.

#### 4.5 Dates of Testing

Testing was performed from May 21 - May 22, 2020.



## 5 Test Results Summary

Test Description	FCC CFR 47/ ISED Rule Part	Limit	Test Result
In-Service Monitoring	15.407(h)(2)(iv) RSS-247 [6.3]	Monitor Co-channel Radar	N/A*
Channel Availability Check	15.407 (h)(2)(ii) RSS-247 [6.3]	60s Detection	N/A*
Channel Move Time	15.407 (h)(2)(iii) RSS-247 [6.3]	10s	Pass
Channel Closing Transmission Time	15.407 (h)(2)(iii) RSS-247 [6.3]	200ms + Aggregate 60ms over remaining 10s period	Pass
Non-Occupancy Period	15.407 (h)(2)(iv) RSS-247 [6.3]	30 minutes	Pass

\*Note: The EUT is a Client device without radar detection.

## 6 Test Equipment List

Manufacturer	Description	Model #	Asset #	FCC ID	Calibration Due
Agilent	Spectrum Analyzer	FSV40	RF-780	N/A	04/11/2021
Rohde & Schwarz	Vector Signal Generator	SMBV100A	RF-141	N/A	04/11/2021
L-Com	Combiner	SC5802N	RF-048	N/A	N/A*
L-Com	Combiner	SC5802N	RF-049	N/A	N/A*
Madge Tech	Temp Meter	PRHTemp2000	EMC-678	N/A	12/16/2020
Pasternack	30dB Attenuator	7092-30	RF-149	N/A	N/A*
Pasternack	20dB Attenuator	PE7005-20	EMC-1292	N/A	N/A*
Pasternack	10dB Attenuator	PE7087-10	RF-340	N/A	N/A*
Nokia	Cable	0730231	RF-715	N/A	N/A*
Pasternack	Cable	PE304-48	RF-665	N/A	N/A*
Huber & Suhner	Cable	SucoFlex 100	RF-352	N/A	N/A*
Rosenberger	Cable	L72-449-915	EMC-154	N/A	N/A*
Pasternack	Cable	PE304-48	RF-666	N/A	N/A*

Note: Equipment with Calibration Due Date of "N/A\*" are functionally verified or characterized before test.

## 7 Test Method

### 7.1 Antenna port conducted measurements

Antenna port conducted measurements were performed on a bench-top setup consisting of a spectrum analyzer, splitters/combiners (as necessary), attenuators, and pre-characterized RF cables.

### 7.2 Test Setup Diagrams

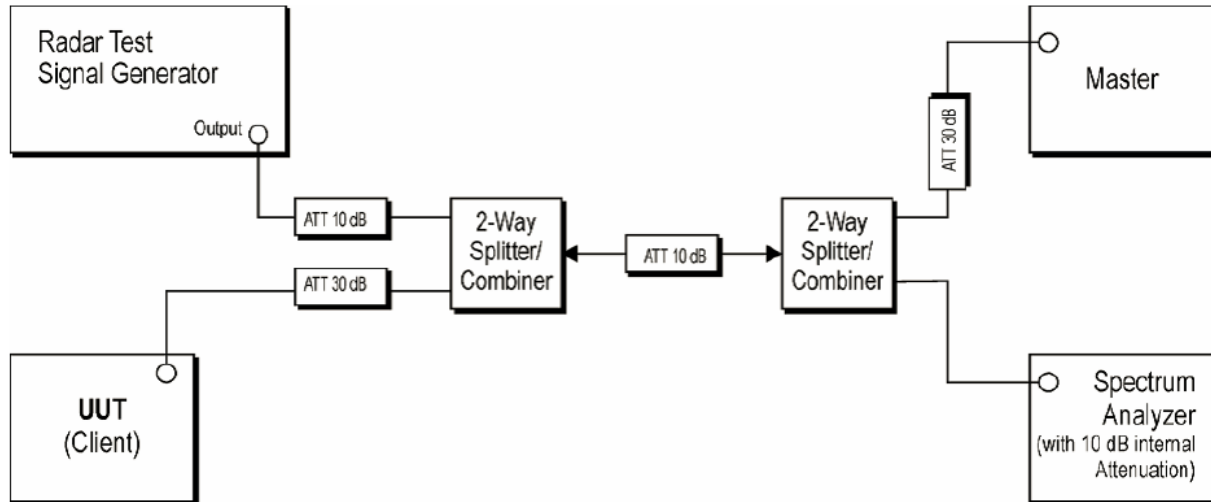


Figure 1. Test Setup for Antenna Port Conducted Measurements

### 7.3 Radar Waveform Verification

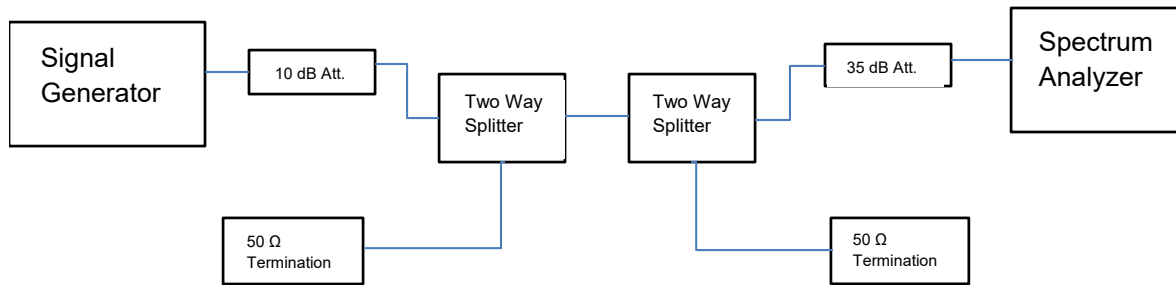


Figure 2. Test Setup for Conducted Measurement Radar Verification

Device Type	Device	Min. Output Power (dBm)	Max Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Required Radar Detection Threshold Level (dBm)
Master	Microsoft Model 1787	14.04	19.91	2.2	22.11	-64
Client	Microsoft Model 1914	7.88	8.20	3.77	11.97	N/A

DFS Measurement	Radar Type
Channel Move Time	0
Channel Closing Transmission Time	0
Non-Occupancy Period	0

Rader Type	Frequency (MHz)	Level (dBm)	Pulse count	Pulse width (µs)	Pulse Repetition Interval (ms)
0	5320	-63.92	18	1.00	1.428
0	5500	-64.07	18	1.00	1.428

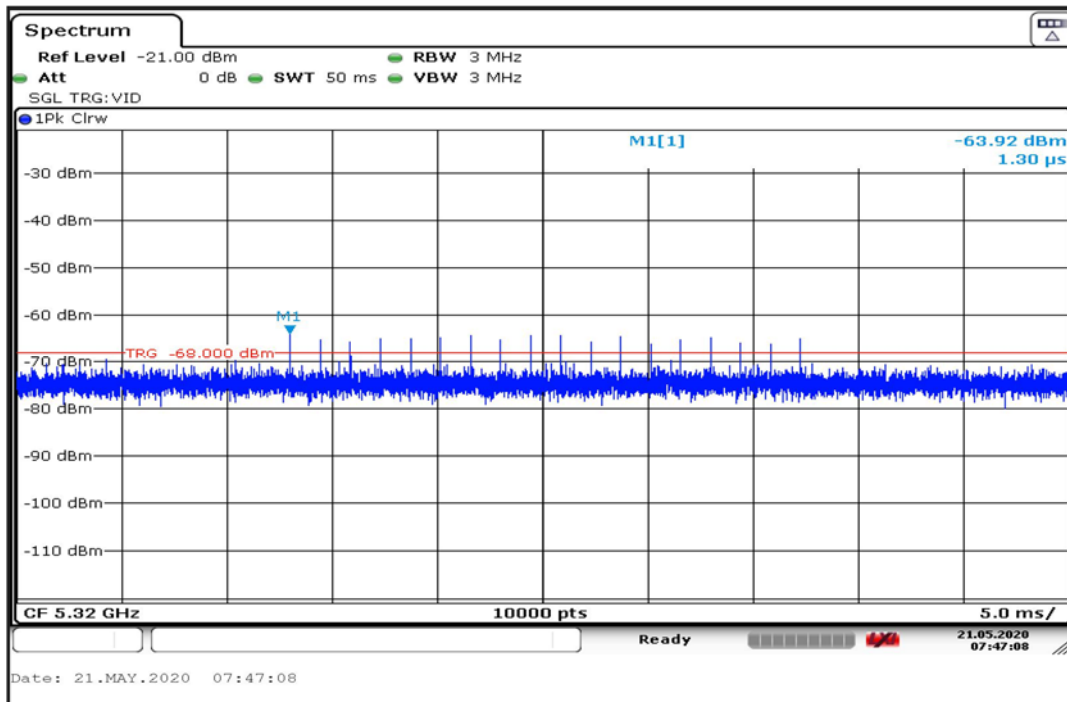


Figure 3. Radar Burst Level at -64dBm: Radar Type 0 (5320MHz, 20MHz BW)

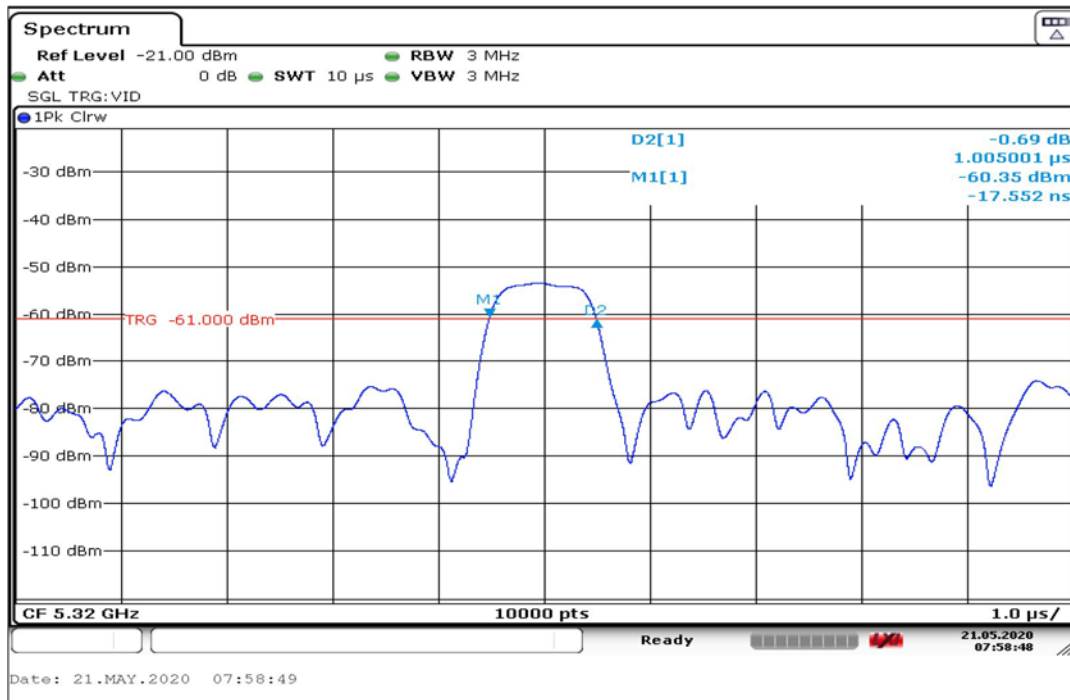


Figure 4. Radar Pulse width: Radar Type 0 (5320MHz, 20MHz BW)

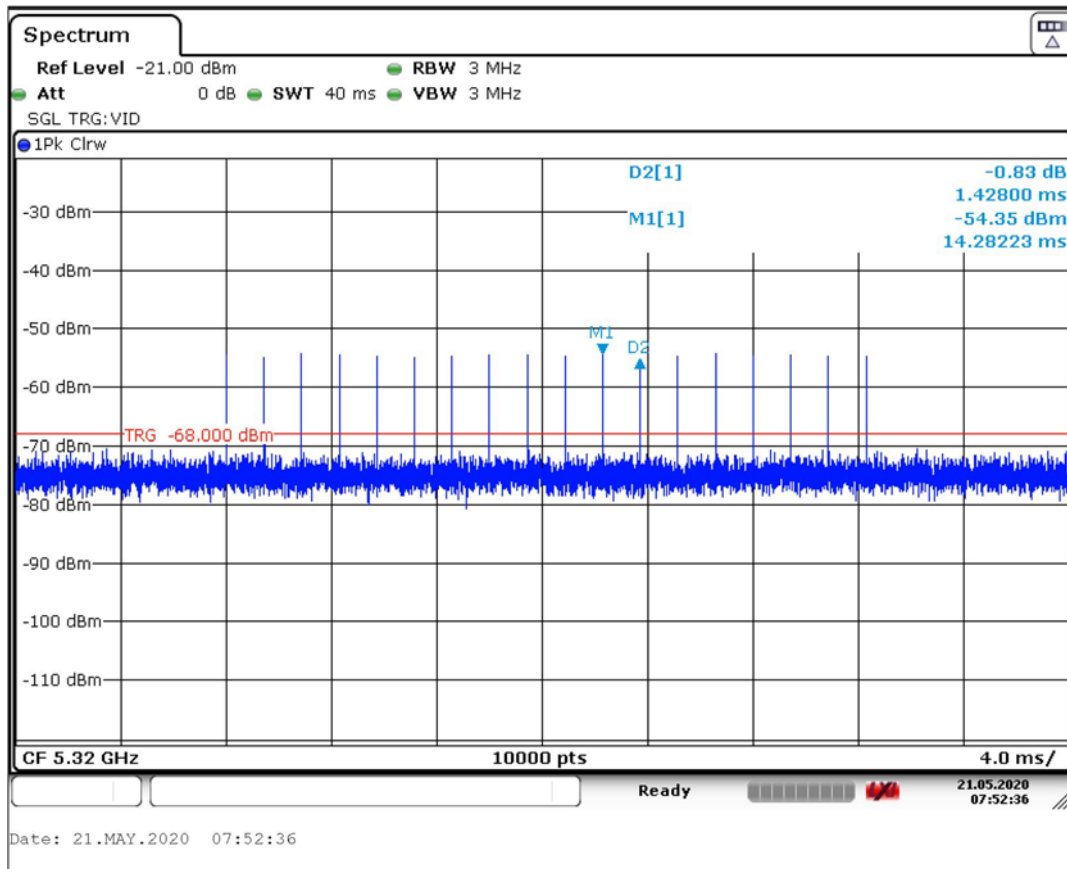


Figure 5. Radar Pulse Repetition Interval: Radar Type 0 (5320MHz, 20MHz BW)

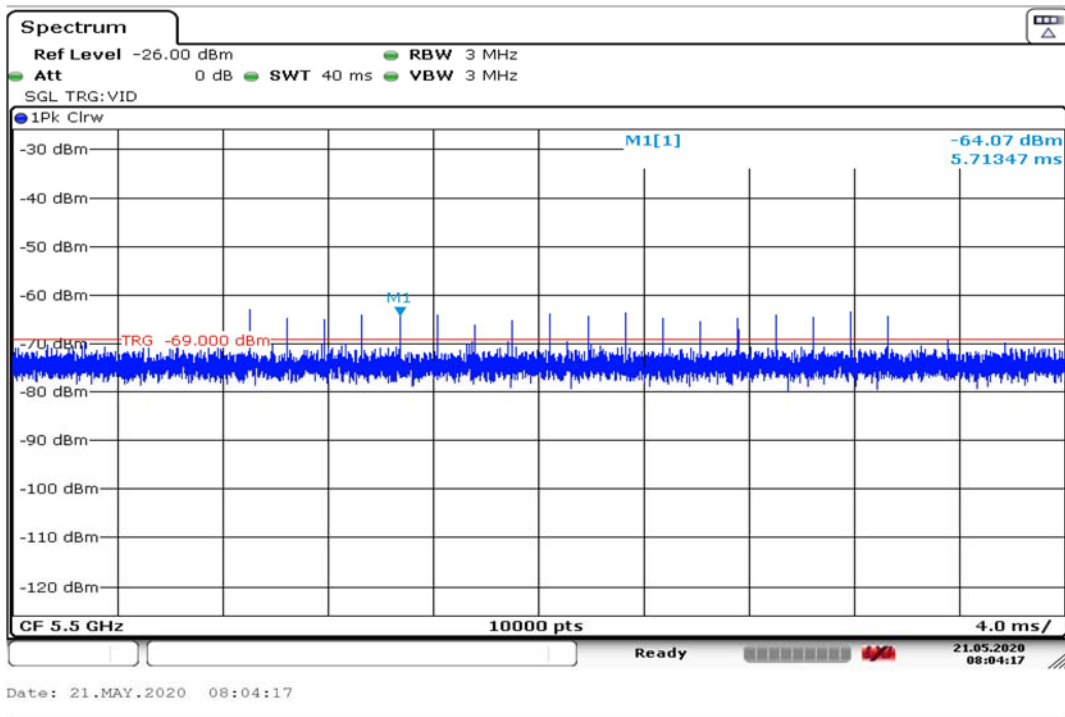


Figure 6. Radar Burst Level at -64dBm: Radar Type 0 (5500MHz, 20MHz BW)

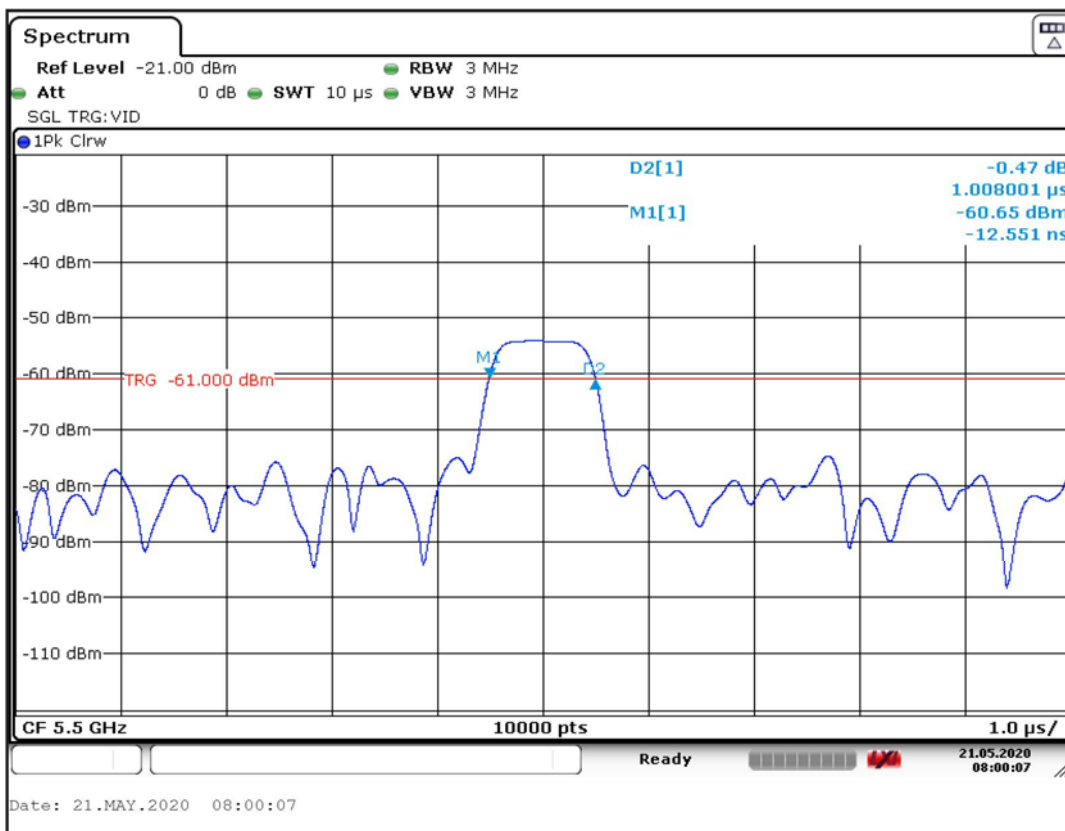


Figure 7. Radar Pulse width: Radar Type 0 (5500MHz, 20MHz BW)

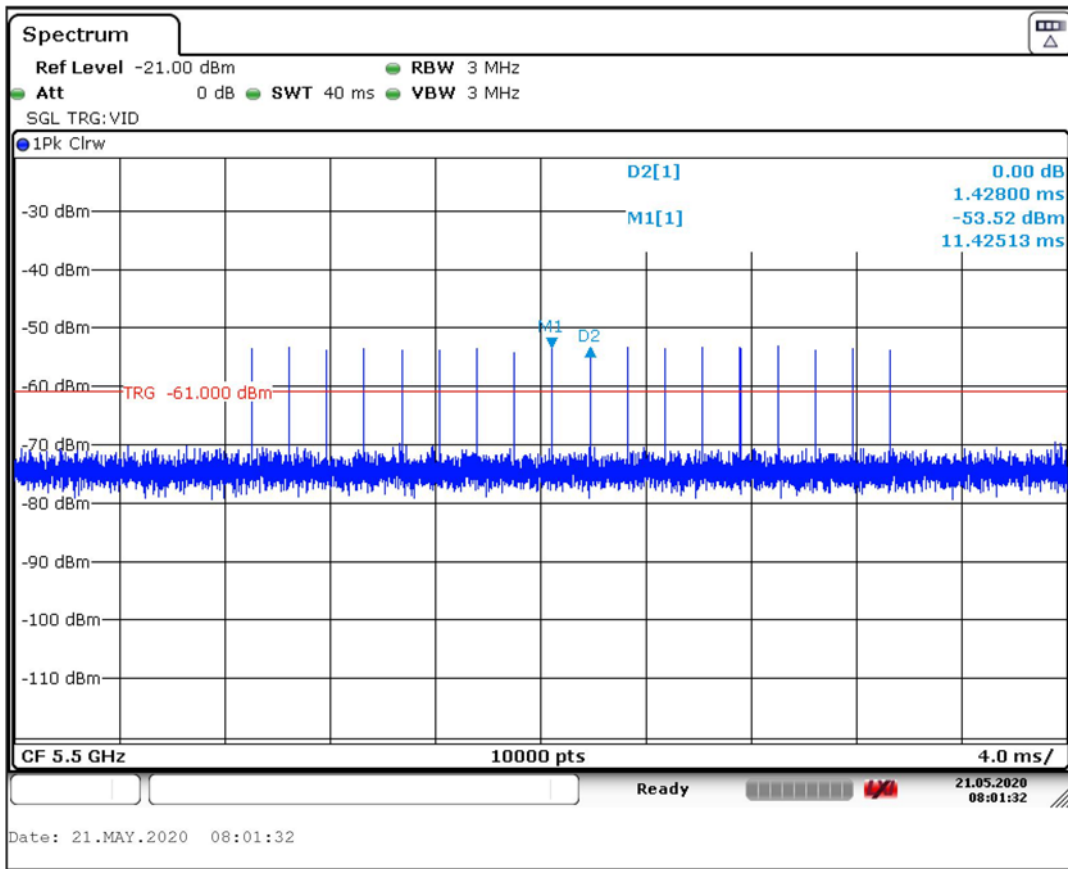


Figure 8. Radar Pulse Repetition Interval: Radar Type 0 (5500MHz, 20MHz BW)



## 7.4 Channel Loading

### 7.4.1 Test Method

Channel Loading measurements were taken with a spectrum analyzer. CSV files were generated, and Channel Loading was calculated using that measured data. Channel Loading was measured to be > 17%.

Channel Loading is calculated using the following formula:

$$\text{Channel Loading (\%)} = \frac{\text{On Time}}{(\text{On Time} + \text{Off Time})} \times 100$$

Frequency (MHz)	Signal Bandwidth (MHz)	Total On Time (ms)	On Time + Off Time (ms)	Channel Loading (%)
5320	20	26.43	100	26.43
5500	20	27.64	100	27.64

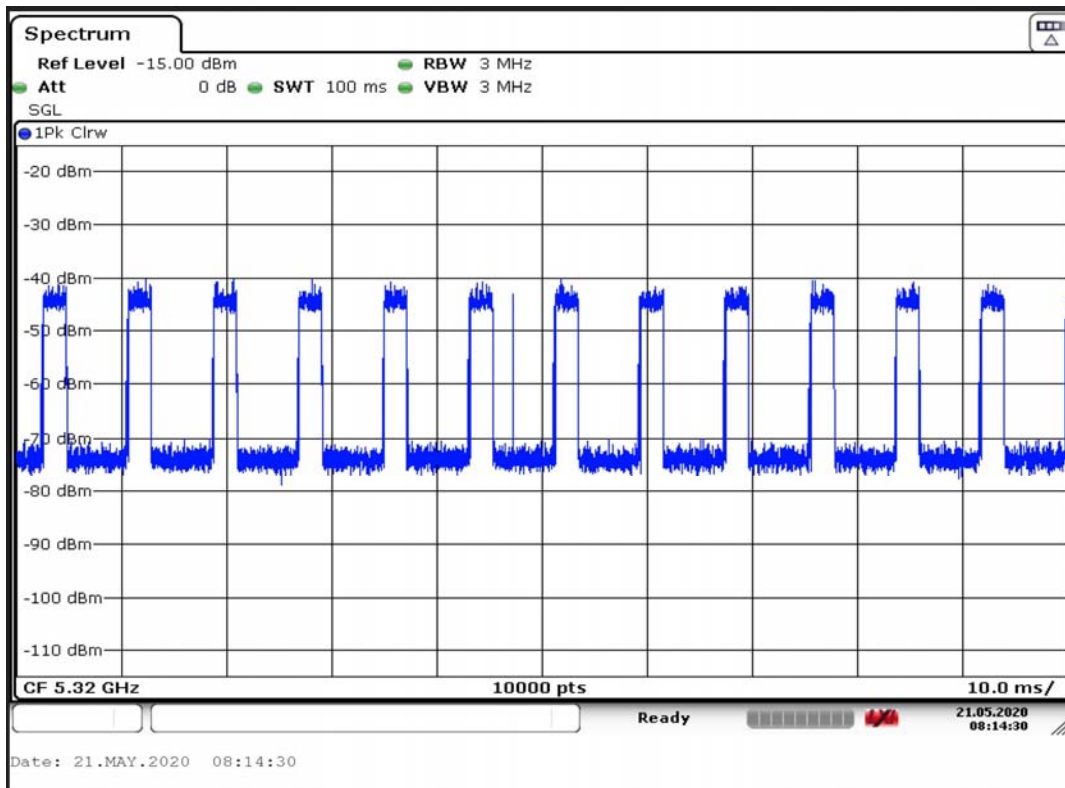


Figure 9. Channel Loading (5320MHz, 20MHz BW)

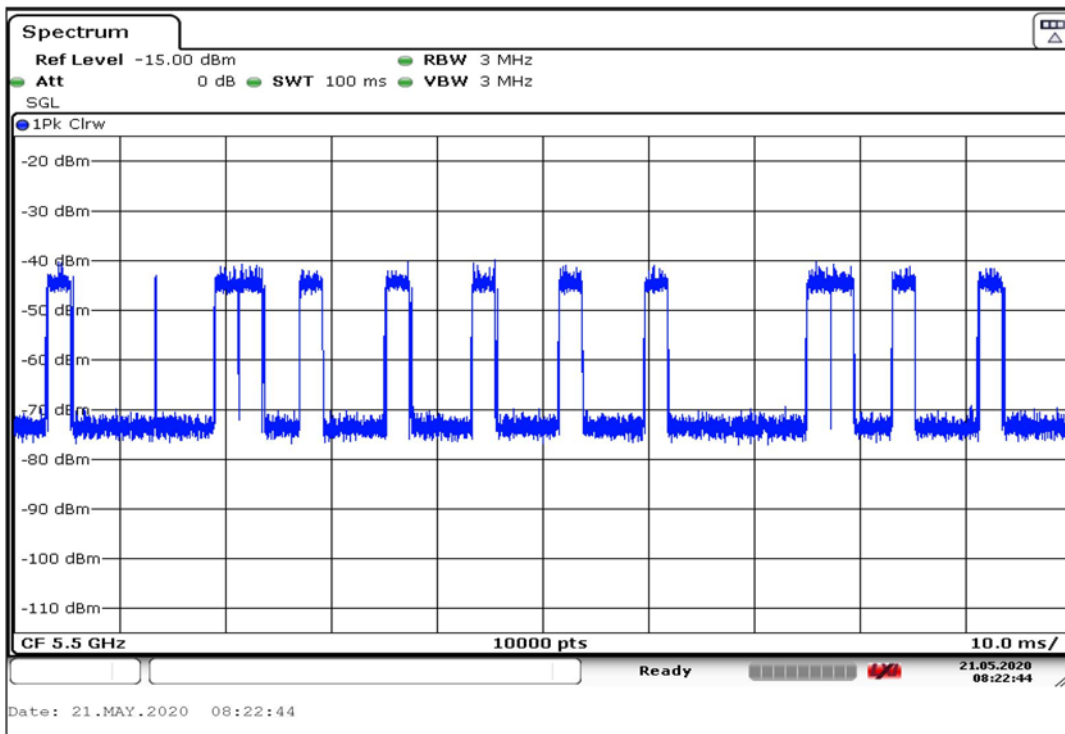


Figure 10. Channel Loading (5500MHz, 20MHz BW)

## 8 Test Results

### 8.1 Channel Move Time

#### 8.1.1 Test Requirement:

FCC CFR 47 Rule Part 15.407 (h)(2)(iv)

ISED Canada RSS-247 [6.3]

#### 8.1.2 Test Method:

Measurements were performed according to the procedures defined in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

#### 8.1.3 Limits:

After a radar signal is detected, the device shall cease all transmissions on the operating channel within 10 seconds.

#### 8.1.4 Test Results:

Pass.

The EUT ceased transmission on the channel within 200ms and there was less than an aggregate of 60ms transmission time in a 10s period.

### 8.1.5 Test Data

#### 8.1.5.1 Channel Move Time

Frequency (MHz)	Signal Bandwidth (MHz)	Channel Move Time (s)	Limit (s)	Result
5320	20	0.166	10	Pass
5500	20	0.162	10	Pass

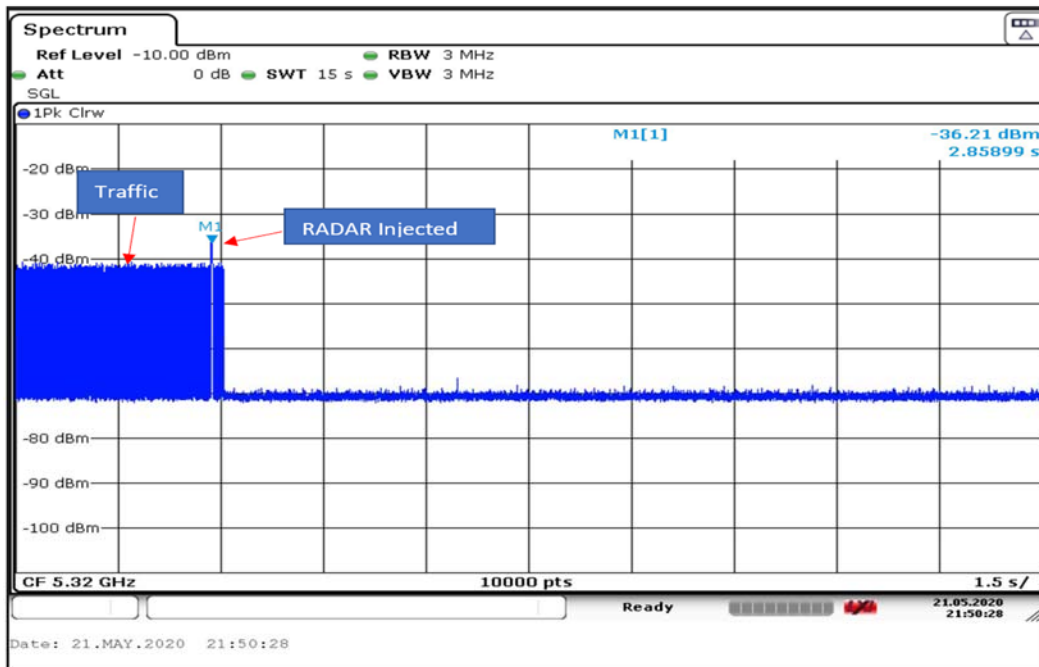


Figure 11. Channel Move Time 5320MHz

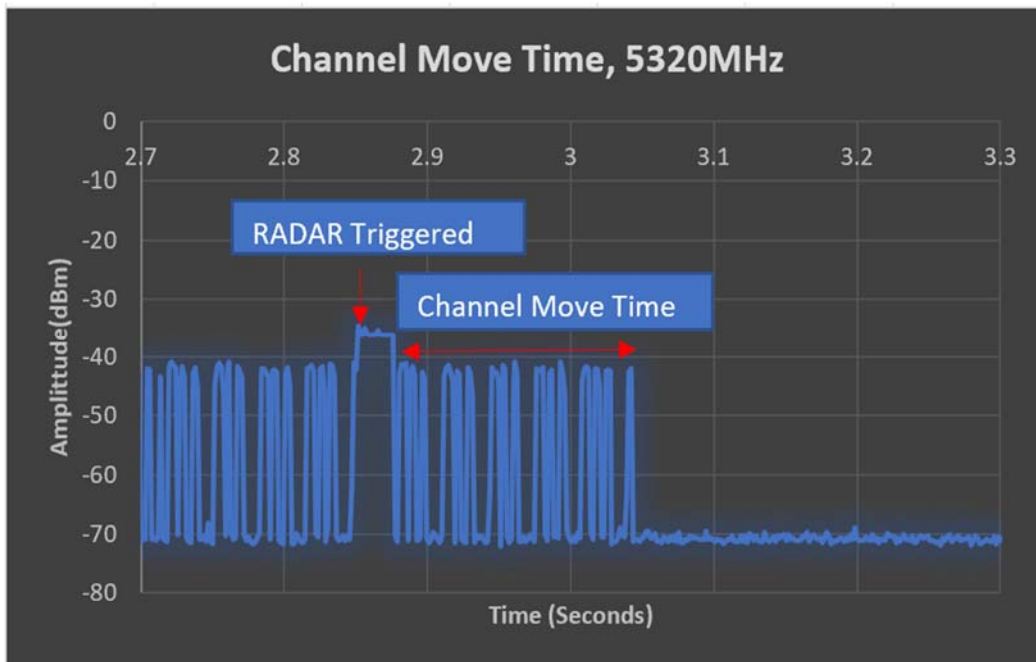


Figure 12. Channel Move Time 5320MHz

Figure 12 is a zoomed plot of Figure 11. Channel Move Time Starts at 2.877 seconds and ends at 3.043 seconds with a total Channel Move Time of 0.166 seconds

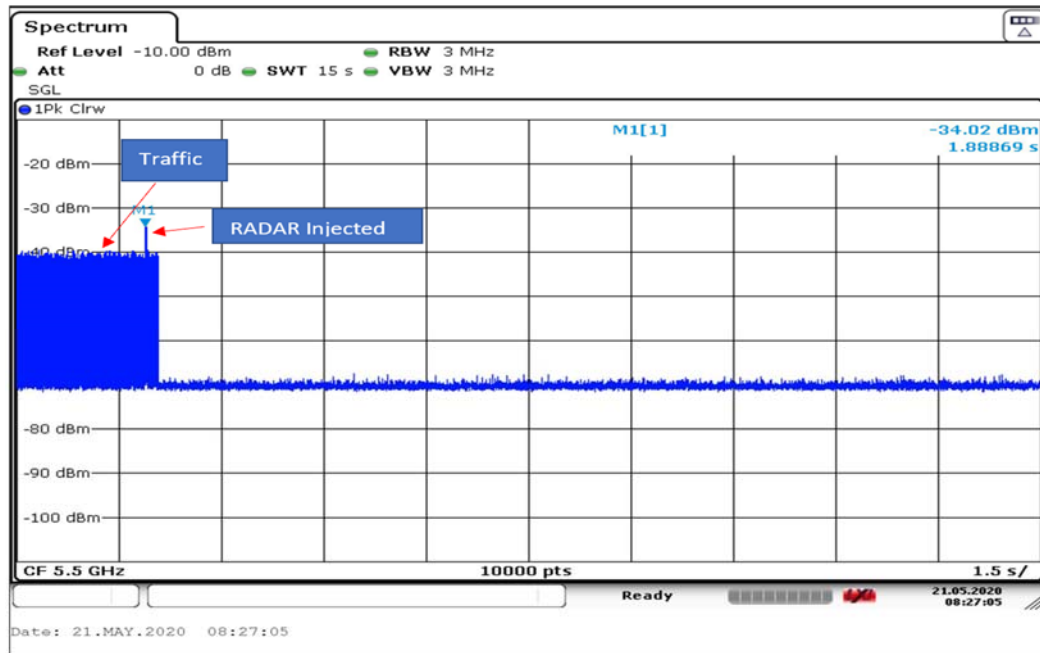


Figure 13. Channel Move Time 5500MHz

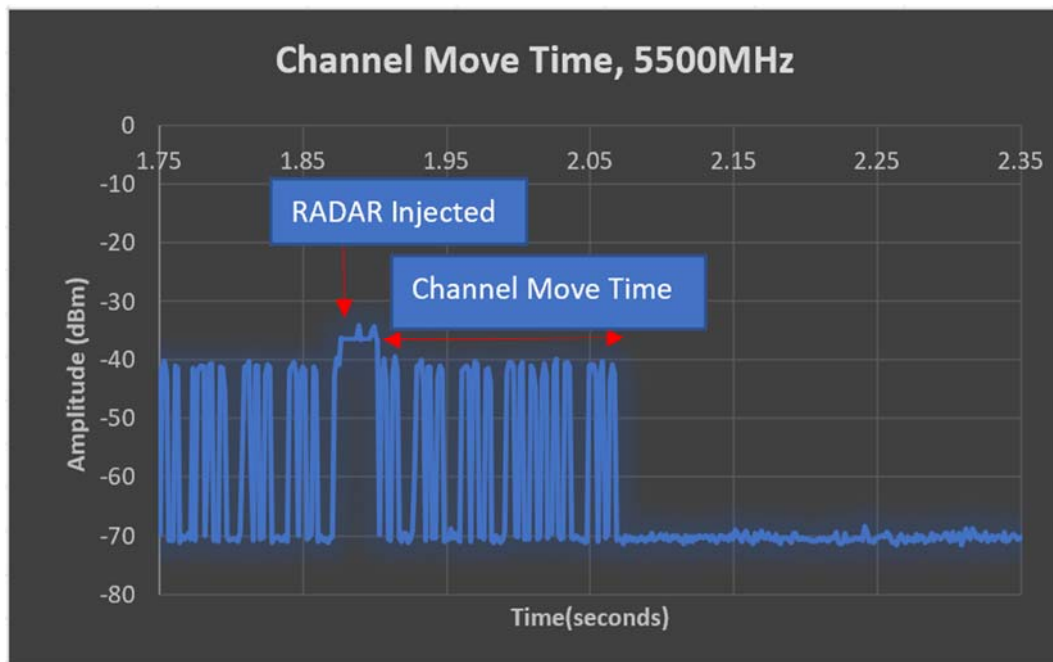


Figure 14. Channel Move Time 5500MHz

Figure 14 is a zoomed plot of Chanel 13. Channel Move Time Starts at 1.9066 seconds and ends at 2.0687 seconds with a total Channel Move Time of 0.1621 seconds

## 8.2 Channel Closing Transmission Time

### 8.2.1 Test Requirement:

FCC CFR 47 Rule Part 15.407 (h)(2)(iii)

ISED Canada RSS-247 [6.3]

### 8.2.2 Test Method:

Measurements were performed according to the procedures defined in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

### 8.2.3 Limits:

After the radar burst has been applied, the EUT shall cease normal transmission on the channel within 200 ms starting at the beginning of the channel move time. Control signaling required to facilitate a channel move (an aggregate of 60ms) over the remaining 10-second period of the channel move time is permissible.


### 8.2.4 Test Results:

Pass.

The EUT ceased transmission on the channel within the allotted time.


### 8.2.5 Test Data

Carrier Frequency (MHz)	Channel Bandwidth (MHz)	Channel Closing Transmission Time (ms)	Channel Closing Transmission Time Limit + Aggregate Control Signaling Time Limit (ms)	Result
5320	20	73.50	200 +60	Pass
5500	20	75.00	200 +60	Pass

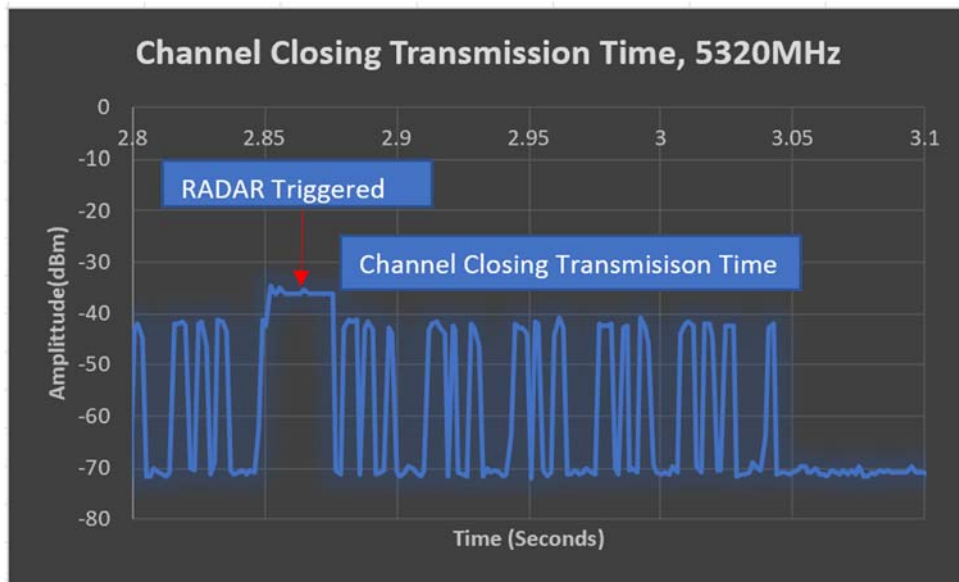

**Figure 15. Channel Closing Transmission Time (5320 MHz)**

Figure 15 is a zoomed plot of Figure 11. Total On-Time of 73.50ms is calculated after the Radar was injected.

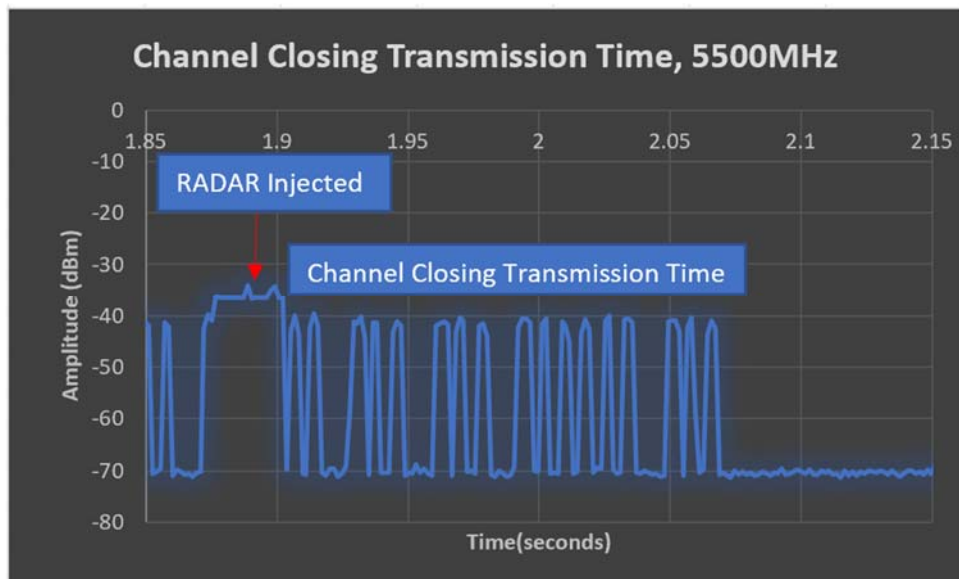

**Figure 16. Channel Closing Transmission Time (5500 MHz)**

Figure 16 is a zoomed plot of Figure 13. Total On-Time of 75.00ms is calculated after the Radar was injected.

### 8.3 Non-Occupancy Period

#### 8.3.1 Test Requirement:

FCC CFR 47 Rule Part 15.407 (h)(2)(iv)

ISED Canada RSS-247 [6.3]

#### 8.3.2 Test Method:

Measurements were performed according to the procedures defined in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

#### 8.3.3 Limits:

A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

#### 8.3.4 Test Results:

Pass.

After radar was detected by the master device, the EUT did not transmit on the tested channel for at least 30 minutes.

#### 8.3.5 Test Data:

Plot shown for 2000 second sweep time.

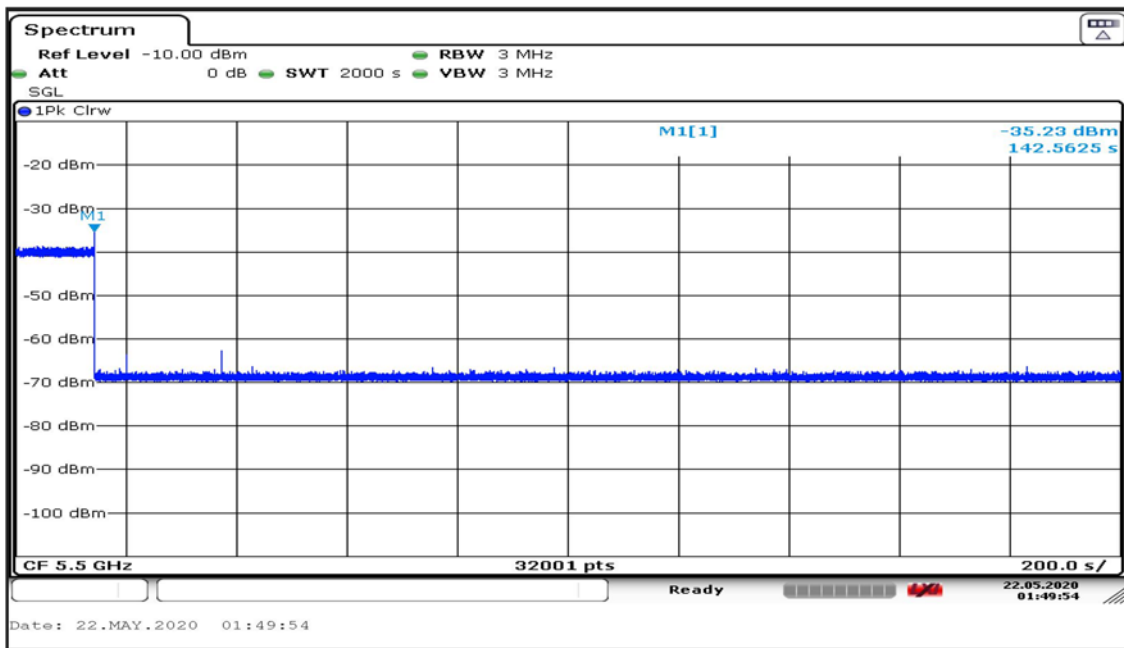


Figure 17. 30 Minute Non-Occupancy Period (5270 MHz)



# End of Report