

Page: 1 of 73

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

PARTIAL REPORT

OF

Applicant: Microsoft Corporation

One Microsoft Way, Redmond, WA 98052-6399 USA

Product Name: Portable Computing Device

Brand Name: Microsoft Model No.: 1927
Contains Wi-Fi Module

Model No.:

 FCC ID:
 C3K1927

 Contains FCC ID:
 C3K1956

 Report Number:
 E2/2019/90049

Report Number: E2/2019/90049 §15.407, Cat: NII, §15.247, Cat: DSS, DTS, §15.225

FCC Rule Part: 2, 22H & 24E & 27B, C & L & 90S

Issue Date: Mar. 19, 2020

Date of Test: Sep. 30, 2019 ~ Dec. 30, 2019

Date of EUT Received: Sep. 30, 2019

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Approved By:

Jazz Huang / Asst. Supervisor





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 2 of 73

Revision History					
Report Number	Revision	Description	Issue Date	Remark	
E2/2019/90049	Rev.00	Original.	Mar. 19, 2020	Revised By: Yuri Tsai	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 3 of 73

Contents

1	GENERAL INFORMATIOGN	4
	SYSTEM TEST CONFIGURATION	
3	SUMMARY OF TEST RESULT	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	. 14
6	RADIATED EMISSION MEASUREMENT	. 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for source. Ref. Page 18 and the feet only to the sample(s) tested and such sample(s) are retained for source. Ref. Page 18 and the feet only to the sample(s) tested and such sample(s) are retained for source. Ref. Page 18 and the feet only to the sample(s) tested and such sample(s) tested and sample Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 73

GENERAL INFORMATIOQN

1.1 Product Description

General:

Product Name:	Portable Computing Device		
Brand Name:	Microsoft		
Model No.:	1927		
Contains Wi-Fi Module Model No.:	1956		
HW Version (Product):	EV2		
SW Version (Product):	Windows 10 Pro		
HW Version (Radio):	EV2		
SW Version (Radio):	19.43.4.4/99.0.49.7/21.60.1.1		
Radio Test Tool & Version:	DRTU 11.1941.0-10270		
Firmware Version (Chip):	1943-95cfa2-c8-00004.05		
	7.66Vdc from Rechargeable Lithium-Ion Polymer Battery or 15V from AC/DC Adapter		
Power Supply:	Battery: Model No.: DYNU01, Supplier: DYNAPACK		
	Adapter: Model No.: 1735, Supplier: LITEON		

Note:

This report is for host FCC ID: C3K1927 which contains the module FCC ID: C3K1956.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 5 of 73

1.2 Test Methodology of Applied Standards

FCC Part 15, Supbpart C §15.225

FCC Part 15, Subpart E §15.407

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v05r02

KDB 558074 D01 v05 DSS Meas. Guidance

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules

ANSI C63.10:2013

CC 47 CFR Part 2, 22H, 24E, 27C, Part 90S.

ANSI C63.26-2015

KDB971168 D01 Power Meas license Digital System v03r01

KDB941225 D01 SAR test for 3G devices v03r01 (SAR Measurement Procedures for 3G Devices, WCDMA / HSPA) was used for EUT and Base station setting.

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333. (TAF code 0513)

FCC Registration Numbers are: TW0002

1.4 Special Accessories

AC Adapter is used while the test is conducted and there is no other accessory attached. This is the worst case condition.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 6 of 73

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT is configured to operate in a continuous transmission mode. EUT placement and various angles were checked to find worst mode where the emission characteristics are maximized.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Radiated Emissions (Simultaneous case)

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 7 of 73

2.4 Configuration of Tested System

Fig. 2-1 Radiated Emission Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
3	NFC Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 8 of 73

SUMMARY OF TEST RESULT

FCC Rules	Description Of Test	Result
\$2.1053 \$22.917(a) \$24.238(a) \$27.53(c)(2),(4) \$27.50(c)(5) \$27.53(f) \$27.53(g) \$27.53(h) \$27.53(m)(4) \$90.691(a)(1)(2)	Field Strength of Spurious Radiation	Compliant
§15.407(b)	Undesirable Radiated Emissions	Compliant
§15.205 §15.209 §15.247(d)	Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	Spurious Emission	Compliant
§15.225 (a)-(d)	Radiated Emission	Compliant

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 9 of 73

DESCRIPTION OF TEST MODES

4.1 Operated in U-NII Bands

13 channels are provided for 802.11b, 802.11g and 802.11n HT20 / ax HE20

are provided for 602.115, 602.119 and 602.1111_111207 ax_1122				
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	
1	2412 MHz	8	2447 MHz	
2	2417 MHz	9	2452 MHz	
3	2422 MHz	10	2457 MHz	
4	2427 MHz	11	2462 MHz	
5	2432 MHz	12	2467 MHz	
6	2437 MHz	13	2472 MHz	
7	2442 MHz			

9 channels are provided for 802.11n HT40 / ax HE40

	—	_	
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	8	2447 MHz
4	2427 MHz	9	2452 MHz
5	2432 MHz	10	2457 MHz
6	2437 MHz	11	2462 MHz
7	2442 MHz		

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of his document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 73

4.2 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

	To charmole are provided for Blackeon						
СН	FREQUENCY	CH	FREQUENCY	CH	FREQUENCY	СН	FREQUENCY
0	2402 MHz	20	2422 MHz	40	2442 MHz	70	2462 MHz
1	2403 MHz	21	2423 MHz	41	2443 MHz	71	2463 MHz
2	2404 MHz	22	2424 MHz	42	2444 MHz	72	2464 MHz
3	2405 MHz	23	2425 MHz	43	2445 MHz	73	2465 MHz
4	2406 MHz	24	2426 MHz	44	2446 MHz	74	2466 MHz
5	2407 MHz	25	2427 MHz	45	2447 MHz	75	2467 MHz
6	2408 MHz	26	2428 MHz	46	2448 MHz	76	2468 MHz
7	2409 MHz	27	2429 MHz	47	2449 MHz	77	2469 MHz
8	2410 MHz	28	2430 MHz	48	2450 MHz	78	2470 MHz
9	2411 MHz	29	2431 MHz	49	2451 MHz	79	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

4.3 Operated in 13.56 MHz Band

1. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.

2. Only one configuration is supported/applicable as follows.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL
NFC	1	1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of his document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 73

4.4 Operated in U-NII Bands

Operated band in 5150 MHz ~5250 MHz:

4 channels are provided for 802.11a, 802.11n HT20, 802.11ac VHT20 / ax HE20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n HT40, 802.11ac VHT40 / ax HE40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac VHT80 / ax HE80

CHANNEL	FREQUENCY	
42	5210 MHz	

1 channel is provided for 802.11ac_VHT160 / ax_HE160

CHANNEL	FREQUENCY
50	5250 MHz

Operated band in 5250 MHz ~5350 MHz:

4 channels are provided for 802.11a, 802.11n HT20, 802.11ac VHT20 / ax HE20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n HT40, 802.11ac VHT40 / ax HE40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac VHT80 / ax HE80

CHANNEL	FREQUENCY
58	5290 MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for elec-

tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 12 of 73

Operated band in 5470 MHz ~5725 MHz:

11 channels are provided for 802.11a, 802.11n HT20, 802.11ac VHT20 / ax HE20

	, <u>-</u>	- , <u>-</u>	
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

5 channels are provided for 802.11n_HT40, 802.11ac_VHT40 / ax_HE40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac VHT80 / ax HE80

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 channel is provided for 802.11ac_VHT160 / ax_HE160

CHANNEL	FREQUENCY
114	5570 MHz

Operated band in 5725 MHz ~5850 MHz:

5 channels are provided for 802.11a, 802.11n HT20, 802.11ac VHT20 / ax HE20

			-
CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n_HT40, 802.11ac_VHT40 / ax_HE40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac VHT80 / ax HE80

CHANNEL	FREQUENCY
155	5775 MHz

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 73

4.5 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.
- 4. For 802.11n HT and VHT modes, the HT emission testing was considered as a worst case scenario and was performed at power levels, per transimit chain, greater than or equal to the maximum power in any HT mode.
- 5. For MIMO modes, the 2TX emission testing was considered as a worst case scenario and was performed at power levels, per transimit chain, greater than or equal to the maximum power in any 1TX mode.
- 6. The EUT is supporting LTE, BT, BLE, 802.11 a/b/g/n/ac/ax and NFC mode, pre-scanned on simultaneous radiated emission on above available combinations, the worst case was reported on this report.
 - The field strength of radiation emission was measured as EUT stand-up position (H, E1 mode) and lie down position (E2 mode), the worst case E2 position was reported.

4.6 Simultaneous Radiated Emission Test Mode:

Mode 1: BT BR + WLAN 5G Mode 2: BLE + WLAN 5G Mode 3: NFC + WLAN 2.4G Mode 4: NFC + WLAN 5G Mode 5: LTE + WLAN 2.4G Mode 6: LTE + WLAN 5G

Mode 7: LTE + WLAN 5G + NFC

Mode 8: LTE + BT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for elec-

This document is issued by the Company's subject to its General Conditions of Service printed overlead, available of request of accessible at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 14 of 73

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
26dB & 6dB Emission Bandwidth	+/- 123.36 Hz
The Maximum Output Power Measurement	+/- 0.96 dB
Peak Power Spectral Density Measurement	+/- 1.67 dB
Frequency Stability	+/- 123.36 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC=+/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	9kHz-30MHz: +/-2.87dB
	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz-30MHz: +/-2.87dB
Measurement uncertainty (Polarization : Horizontal)	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of his document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 73

6 RADIATED EMISSION MEASUREMENT

6.1 Standard Applicable

For NII

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- 1. For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
- 2. For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

APPLICABLE TO	LIMIT			
FCC KDB 789033 D02 General UNII Test Procedures New Rules	FIELD STRE	ENGTH AT 3m		
	PK: 74 (dBμV/m)	AV 54 (dBμV/m)		
APPLICABLE TO	EIRP LIMIT FIELD STRENGTH			
15.407(b)(1) RSS-247 6.2.1.2 15.407(b)(2) RSS-247 6.2.2.2 15.407(b)(3) RSS-247 6.2.3.2	PK: -27 (dBm/MHz)	PK: 68.3 (dBμV/m)		
15.407(b)(4)(i) RSS-247 6.2.4.2	PK:-27 (dBm/MHz) *1 PK:10 (dBm/MHz) *2 PK:15.6 (dBm/MHz) *3 PK:27 (dBm/MHz) *4	PK: 68.2(dBµV/m) *1 PK:105.2 (dBµV/m) *2 PK: 110.8(dBµV/m) *3 PK:122.2 (dBµV/m) *4		

^{*1} beyond 75 MHz or more above of the bandedge.

EIRP = $((E*d)^2) / 30$, where E is the field in V/m, d is the measurement distance (3m), EIRP is the equivalent isotropically radiated power in Watts.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Page: 16 of 73

Unwanted spurious emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(KHz)	300
0.490-1.705	24000/F(KHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)

For DTS & DSS,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below. And according to §15.33(a) (1) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所形分列が明り近根音場不能対応となる可見、同時に依めます場合のできない。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 17 of 73

Note:

- 1. The lower limit shall apply at the transition frequencies.
- Emission level (dB μ V/m) = 20 log Emission level (μ V/m)

For DXX,

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- Emission level in dBμV/m=20 log (μV/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 18 of 73

For PCB

According to FCC §2.1053,

FCC §22.917(a), §24.238(a), §27.53 (h), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm).

§27.53 (c)

- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB (-13dBm)
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations;
- §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC §27.53(c) (5) & FCC §27.53(g)

Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC §27.53(h) (3)

Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 19 of 73

FCC §27.53(m) (4) (6)

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Measurement procedure. Compliance with these rules is based on the use of measurement in strumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 20 of 73

6.2 Measurement Equipment Used

	SGS SAC-III						
Name of Equip- ment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due		
Broadband An- tenna	TESEQ	CBL 6112D	35240	09/09/2019	09/08/2020		
Horn Antenna	Schwarzbeck	BBHA9170	185	08/07/2019	08/06/2020		
Horn Antenna	Schwarzbeck	BBHA9120D	1187	01/09/2019	01/08/2020		
Loop Antenna	ETS.LINDGREN	6502	143303	04/25/2019	04/24/2020		
EMI Test Receiver	R&S	ESU 40	100363	04/15/2019	04/14/2020		
Radio Communi- cation Analyer	Anritsu	MT8820C	6201107337	07/17/2019	07/16/2020		
Pre-Amplifier	EMC Instru- ments	EMC330	980096	12/25/2018	12/24/2019		
Pre-Amplifier	EMC Instru- ments	EMC0011830	980199	12/25/2018	12/24/2019		
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	12/25/2018	12/24/2019		
Highpass Filter	Micro Tronics	BRM50701-01	G008	12/25/2018	12/24/2019		
Band Rejection Filter	Micro-Tronics	G015	RF100	12/25/2018	12/24/2019		
Band Rejection Filter	Micro-Tronics	G016	RF101	12/25/2018	12/24/2019		
Notch Filter	Woken	EWT-54-0037	RF54	12/25/2018	12/24/2019		
Notch Filter	Woken	EWT-54-0038	RF55	12/25/2018	12/24/2019		
Band Rejection Filter	Micro-Tronics	G021	RF102	12/25/2018	12/24/2019		
Coaxial Cable	Huber Suhner	SUCOFLEX 104	MY17388/4	12/25/2018	12/24/2019		
Coaxial Cable	Huber Suhner	RG 214/U	W22.03	12/25/2018	12/24/2019		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 21 of 73

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Pre-Amplifier	EMC Instruments	EMC330	980096	11/20/2019	11/19/2020
Pre-Amplifier	EMC Instruments	EMC0011830	980199	11/20/2019	11/19/2020
Pre-Amplifier	EMC Instruments	EMC184045B	980135	11/20/2019	11/19/2020
Highpass Filter	Micro Tronics	BRM50701-01	G008	11/20/2019	11/19/2020
Band Rejection Fil- ter	Micro-Tronics	G015	RF100	11/20/2019	11/19/2020
Band Rejection Fil- ter	Micro-Tronics	G016	RF101	11/20/2019	11/19/2020
Notch Filter	Woken	EWT-54-0037	RF54	11/20/2019	11/19/2020
Notch Filter	Woken	EWT-54-0038	RF55	11/20/2019	11/19/2020
Band Rejection Fil- ter	Micro-Tronics	G021	RF102	11/20/2019	11/19/2020
Coaxial Cable	Huber Suhner	SUCOFLEX 104	MY17388/4	11/20/2019	11/19/2020
Coaxial Cable	Huber Suhner	RG 214/U	W22.03	11/20/2019	11/19/2020

Note: The measurement was taken place with the long duration of the time, and additional equip ment list as shown above indicate those equipment of which has been subject to undertake the calibration in intermediate period of time of the measurement.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 22 of 73

6.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

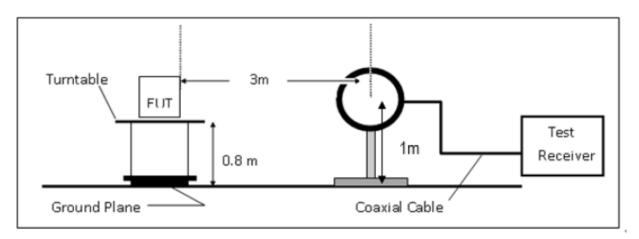

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

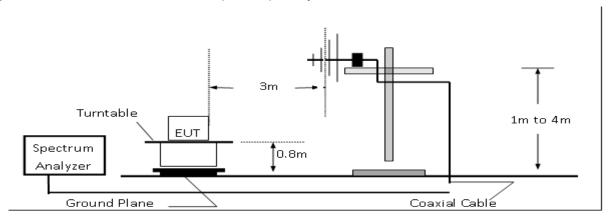

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

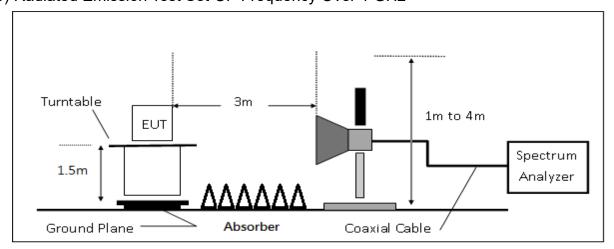

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所形分列が明り近根では大田の両人のの原理に関いて、本根管大型を公司管理計画である。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 23 of 73

6.4 Measurement Procedure (Simultaneous case)

- The testing follows the Measurement Procedure of ANSI C63.10:2013.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

6.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 24 of 73

Actual $FS(dB\mu V/m) = SPA$. Reading level($dB\mu V$) + Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) - Pre_Amplifier Gain(dB)

6.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

6.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 25 of 73

Radiated Spurious Emission Measurement Result

WIFI+BT


Report Number :E2/2019/90049 **Test Date** :2019-12-30

Operation Mode :802.11a + BTBR Temp./Humi. :22.9/52

Test Channel :5220 MHz + 2480 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Ashton

:E2 Plan **EUT Pol**

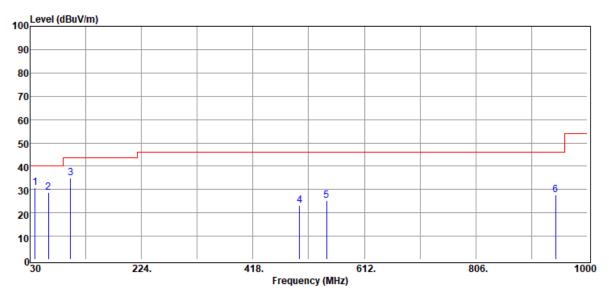

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
38.73	QP	39.68	-9.04	30.64	40.00	-9.36
62.01	Peak	50.32	-21.43	28.89	40.00	-11.11
100.81	Peak	51.96	-17.06	34.90	43.50	-8.60
499.48	Peak	31.65	-8.44	23.21	46.00	-22.79
546.04	Peak	31.93	-6.74	25.19	46.00	-20.81
944.71	Peak	31.57	-3.73	27.84	46.00	-18.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

下子可分成型 UNIX 音響を発生性対象人体の発見 プロザロ体のほと称音句と、本来を表現を発音を持ちませた。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 26 of 73


Report Number **Test Date** :E2/2019/90049 :2019-11-14

Operation Mode :802.11a + BTBR Temp./Humi. :22.9/52

Test Channel :5220 MHz + 2480 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

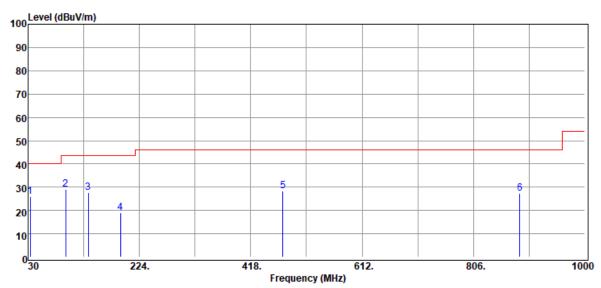

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
33.88	Peak	31.92	-6.05	25.87	40.00	-14.13
95.96	Peak	46.99	-18.04	28.95	43.50	-14.55
134.76	Peak	42.00	-14.48	27.52	43.50	-15.98
191.02	Peak	37.12	-18.01	19.11	43.50	-24.39
474.26	Peak	37.26	-8.72	28.54	46.00	-17.46
886.51	Peak	32.33	-4.84	27.49	46.00	-18.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:Ashton

Page: 27 of 73

Engineer


Report Number **Test Date** :E2/2019/90049 :2019-11-13

Operation Mode :802.11a + BTBR Temp./Humi. :22.1/64

Test Channel :5220 MHz + 2480 MHz Antenna Pol. :VERTICAL

Test Mode :TX

EUT Pol :E2 Plan

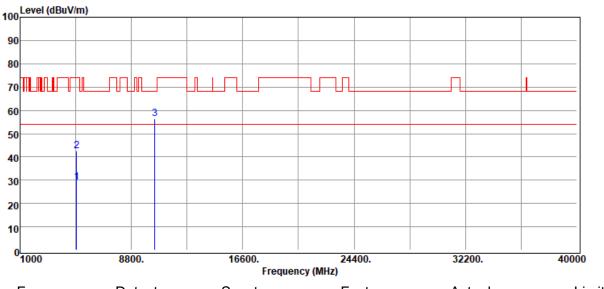

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4960.00	Average	17.59	11.31	28.90	54.00	-25.10
4960.00	Peak	31.27	11.31	42.58	74.00	-31.42
10440.00	Peak	31.30	25.08	56.38	68.20	-11.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 28 of 73


Report Number **Test Date** :E2/2019/90049 :2019-11-13

Operation Mode :802.11a + BTBR Temp./Humi. :22.1/64

Test Channel :5220 MHz + 2480 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

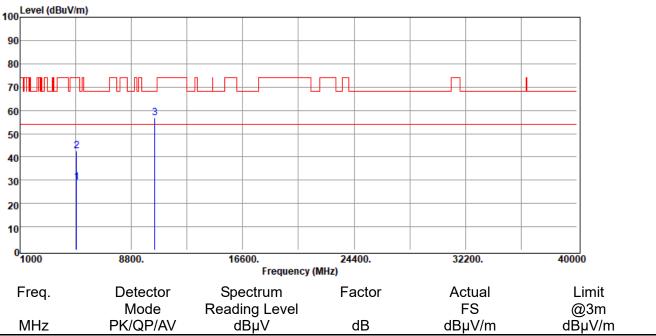

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4960.00	Average	17.69	11.31	29.00	54.00	-25.00
4960.00	Peak	31.25	11.31	42.56	74.00	-31.44
10440.00	Peak	31.57	25.08	56.65	68.20	-11.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 29 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

Operation Mode :802.11n20/B1 + BT BR Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2480 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

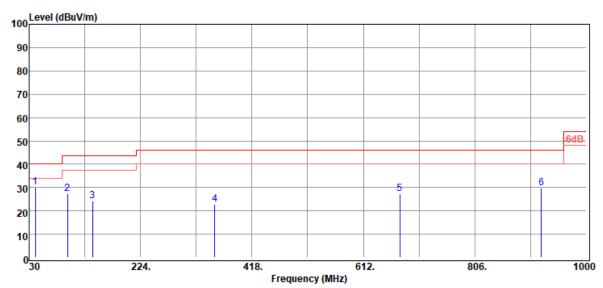

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
40.67	Peak	39.50	-9.33	30.17	40.00	-9.83
96.93	Peak	43.45	-16.13	27.32	43.50	-16.18
140.58	Peak	37.52	-13.18	24.34	43.50	-19.16
353.01	Peak	31.87	-9.13	22.74	46.00	-23.26
675.05	Peak	29.38	-2.20	27.18	46.00	-18.82
921.43	Peak	28.53	1.27	29.80	46.00	-16.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 30 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

Operation Mode :802.11n20/B1 + BT BR Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2480 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

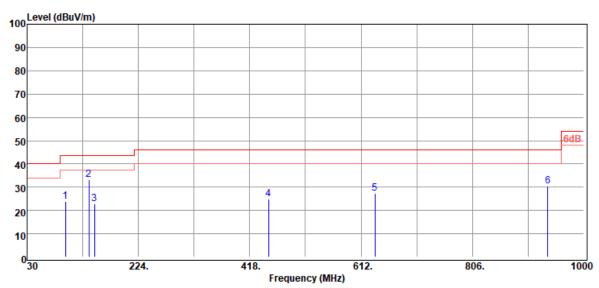

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
96.93	Peak	39.83	-16.13	23.70	43.50	-19.80
137.67	Peak	46.28	-13.11	33.17	43.50	-10.33
147.37	Peak	36.36	-13.56	22.80	43.50	-20.70
450.98	Peak	30.81	-5.88	24.93	46.00	-21.07
636.25	Peak	29.33	-1.90	27.43	46.00	-18.57
936.95	Peak	29.21	1.35	30.56	46.00	-15.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:Enzo

Page: 31 of 73

Report Number :E2/2019/90049 Test Date :2020-01-17

Operation Mode :802.11n20/B1 + BT BR Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2480 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer

EUT Pol :E2 Plan



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



:2020-01-17

Page: 32 of 73


Report Number **Test Date** :E2/2019/90049

Operation Mode :802.11n20/B1 + BT BR Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2480 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

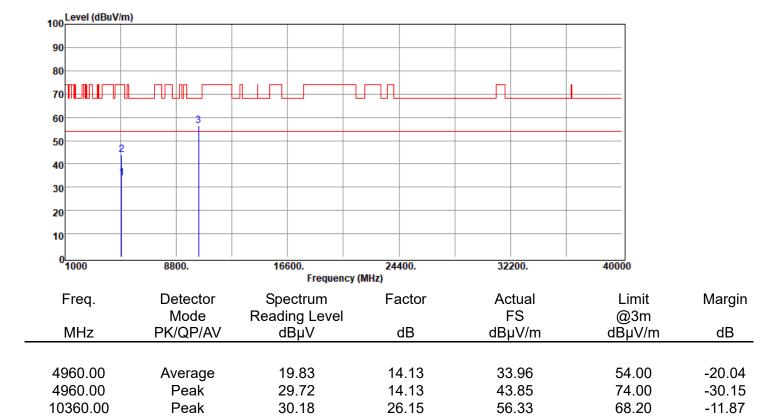

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所形分列が明り近根では大田の両人のの原理に関いて、本根管大型を公司管理計画である。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 33 of 73

WIFI+BLE


Report Number **Test Date** :E2/2019/90046 :2020-01-06

Operation Mode :802.11a + BLE 1M Temp./Humi. :21.4/67

Test Channel :5220 MHz + 2442 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

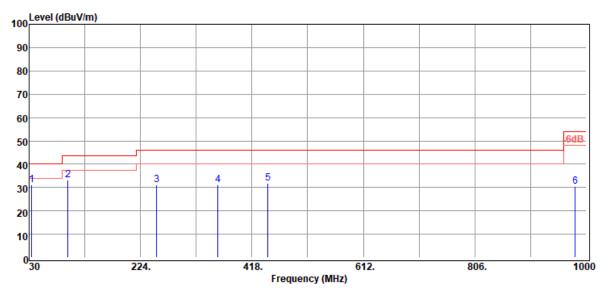

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB
34.85	Peak	36.59	-5.52	31.07	40.00	-8.93
97.90	Peak	49.18	-15.99	33.19	43.50	-10.31
252.13	Peak	42.52	-11.26	31.26	46.00	-14.74
358.83	Peak	40.05	-8.87	31.18	46.00	-14.82
446.13	Peak	38.02	-6.04	31.98	46.00	-14.02
980.60	Peak	28.75	1.87	30.62	54.00	-23.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 34 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

Operation Mode :802.11a + BLE 1M Temp./Humi. :21.4/67

Test Channel :5220 MHz + 2442 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

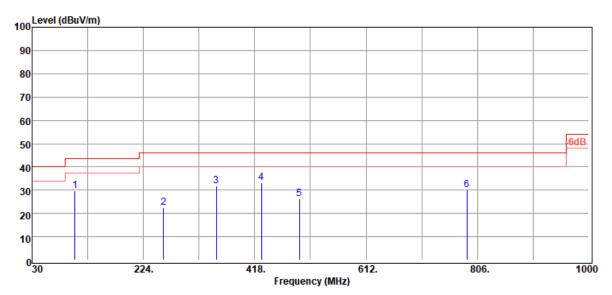

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
104.69	Peak	44.44	-14.81	29.63	43.50	-13.87
258.92	Peak	32.83	-10.49	22.34	46.00	-23.66
351.07	Peak	41.31	-9.30	32.01	46.00	-13.99
429.64	Peak	39.08	-5.99	33.09	46.00	-12.91
495.60	Peak	31.21	-5.05	26.16	46.00	-19.84
787.57	Peak	29.74	0.23	29.97	46.00	-16.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 35 of 73


Report Number :E2/2019/90049 Test Date :2020-01-06

Operation Mode :802.11a + BLE 1M Temp./Humi. :21.2/70

Test Channel :5220 MHz + 2442 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

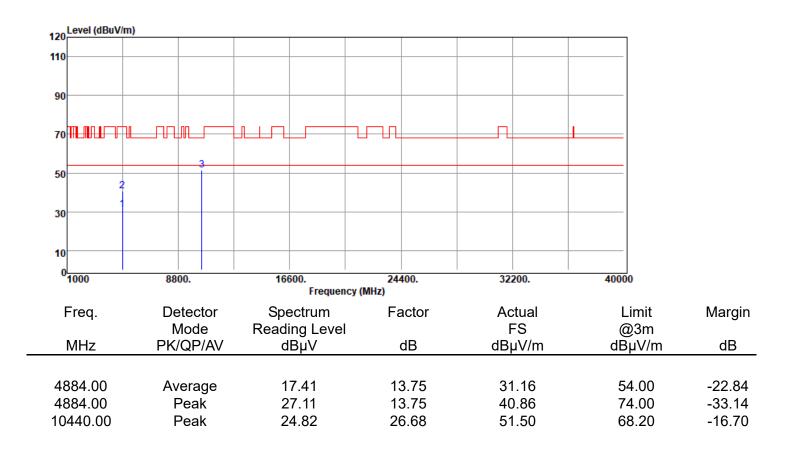

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document, htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 73


Report Number :E2/2019/90049 Test Date :2020-01-06

Operation Mode :802.11a + BLE 1M Temp./Humi. :21.2/70

Test Channel :5220 MHz + 2442 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

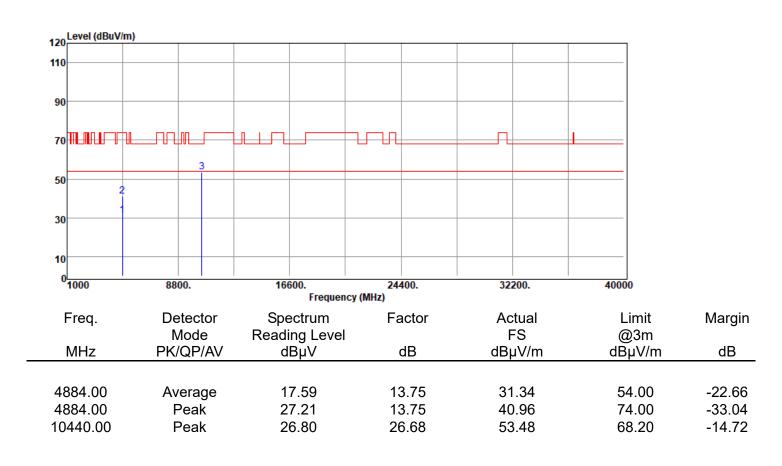

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 37 of 73

WIFI+NFC


Test Date Report Number :E2/2019/90049 :2019-11-14

Operation Mode :802.11b + NFC Temp./Humi. :23.6/52

Test Channel :2412 MHz + 13.56 MHz Antenna Pol. : Ground Parallel

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

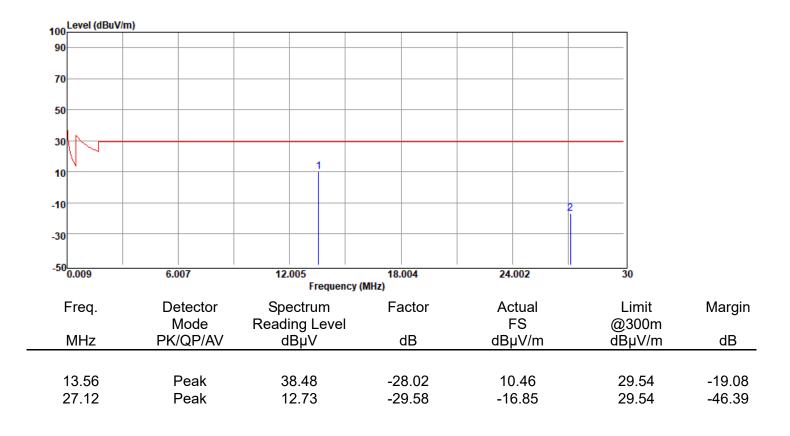

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 38 of 73


Report Number **Test Date** :E2/2019/90049 :2019-11-14

Operation Mode :802.11b + NFC Temp./Humi. :23.6/52

Test Channel :2412 MHz + 13.56 MHz Antenna Pol. : Parallel

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

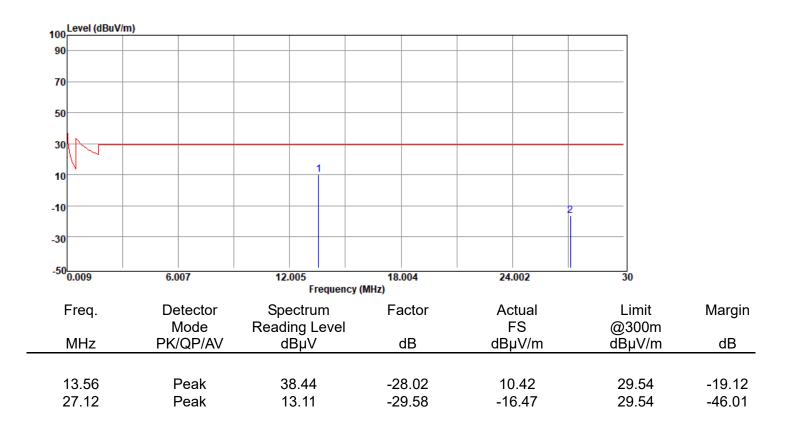

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 39 of 73


Report Number **Test Date** :2019-11-14 :E2/2019/90049

Operation Mode :802.11b + NFC Temp./Humi. :23.6/52

Test Channel :2412 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

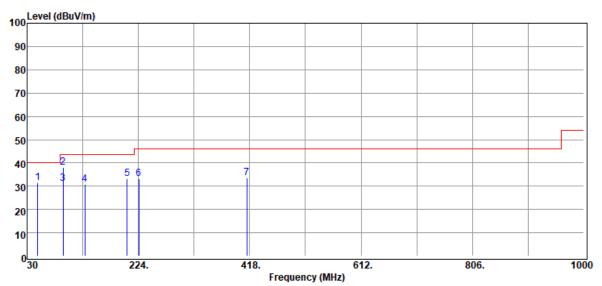

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
48.43	Peak	47.79	-16.22	31.57	40.00	-8.43
93.05	Peak	54.93	-16.79	38.14	43.50	-5.36
93.05	QP	49.26	-18.28	30.98	43.50	-12.52
130.88	Peak	45.33	-14.47	30.86	43.50	-12.64
204.60	Peak	50.52	-17.27	33.25	43.50	-10.25
224.97	Peak	50.04	-16.89	33.15	46.00	-12.85
413.15	Peak	43.11	-9.61	33.50	46.00	-12.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 40 of 73


Report Number **Test Date** :E2/2019/90049 :2019-11-14

Operation Mode :802.11b + NFC Temp./Humi. :23.6/52

Test Channel :2412 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

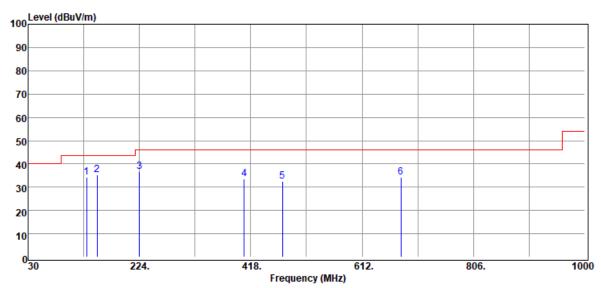

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
131.85	Peak	48.61	-14.45	34.16	43.50	-9.34
150.28	Peak	50.90	-15.72	35.18	43.50	-8.32
224.00	Peak	53.51	-16.97	36.54	46.00	-9.46
406.36	Peak	43.45	-9.80	33.65	46.00	-12.35
473.29	Peak	41.38	-8.79	32.59	46.00	-13.41
679.90	Peak	40.68	-6.53	34.15	46.00	-11.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 41 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

Operation Mode :802.11a + NFC Temp./Humi. :21.4/67

Test Channel :5220 MHz + 13.56 MHz Antenna Pol. :Parallel

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

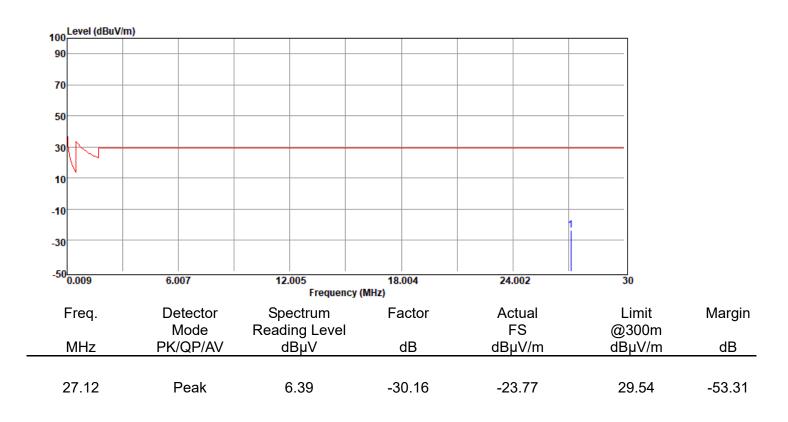

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 42 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

Operation Mode :802.11a + NFC Temp./Humi. :21.4/67

Test Channel :5220 MHz + 13.56 MHz Antenna Pol. :Ground Parallel

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

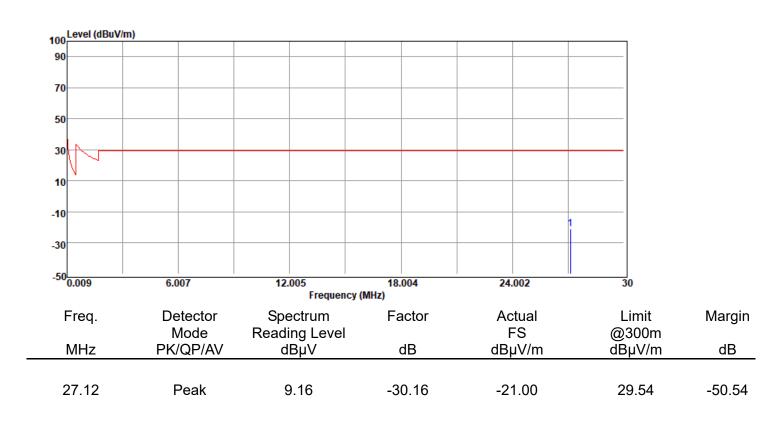

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 43 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

Operation Mode :802.11a + NFC Temp./Humi. :21.4/67

Test Channel :5220 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

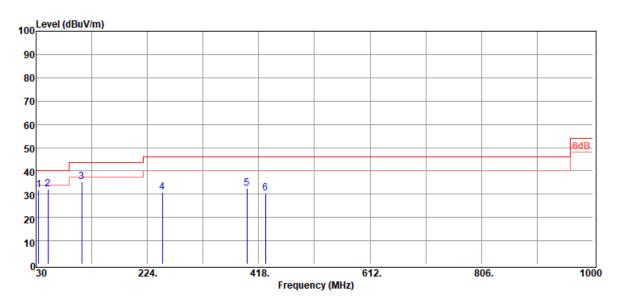

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
1711 12	11001770	αυμν	ub_	αυμν////	αυμν/ιιι	<u> </u>
34.85	Peak	37.48	-5.52	31.96	40.00	-8.04
50.37	Peak	48.75	-16.61	32.14	40.00	-7.86
109.54	Peak	49.33	-14.15	35.18	43.50	-8.32
250.19	Peak	42.47	-11.51	30.96	46.00	-15.04
397.63	Peak	40.07	-7.62	32.45	46.00	-13.55
429.64	Peak	36.57	-5.99	30.58	46.00	-15.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 44 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

Operation Mode :802.11a + NFC Temp./Humi. :21.4/67

Test Channel :5220 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

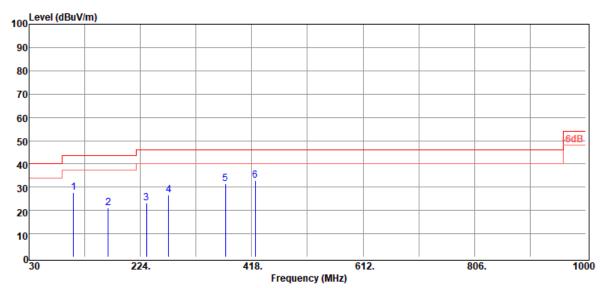

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
107.60	Peak	42.18	-14.46	27.72	43.50	-15.78
167.74	Peak	36.38	-15.22	21.16	43.50	-22.34
234.67	Peak	36.85	-13.59	23.26	46.00	-22.74
273.47	Peak	37.67	-11.10	26.57	46.00	-19.43
372.41	Peak	39.99	-8.38	31.61	46.00	-14.39
423.82	Peak	39.13	-6.22	32.91	46.00	-13.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 45 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

Operation Mode :802.11a + NFC Temp./Humi. :21.4/67

Test Channel :5220 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

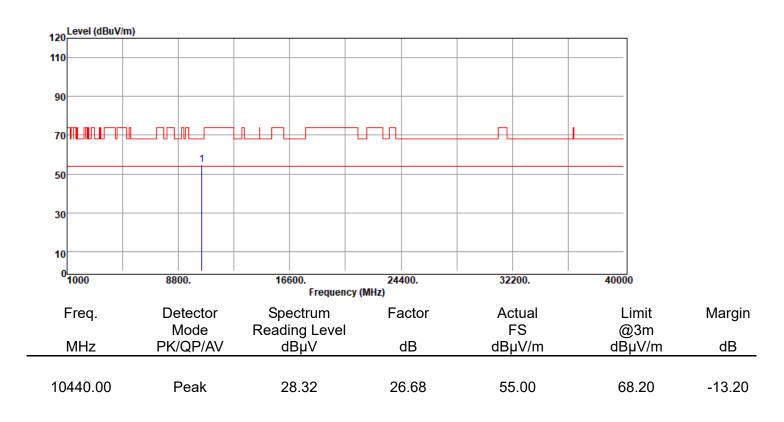

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 46 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

Operation Mode :802.11a + NFC Temp./Humi. :21.4/67

Test Channel :5220 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

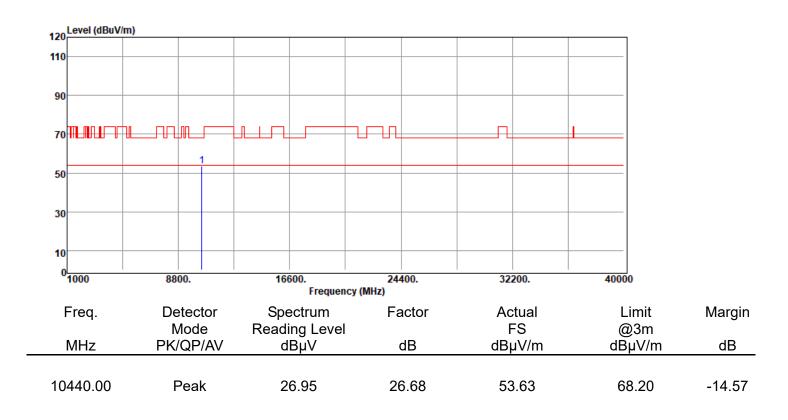

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 47 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

Operation Mode :802.11n20/B1 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

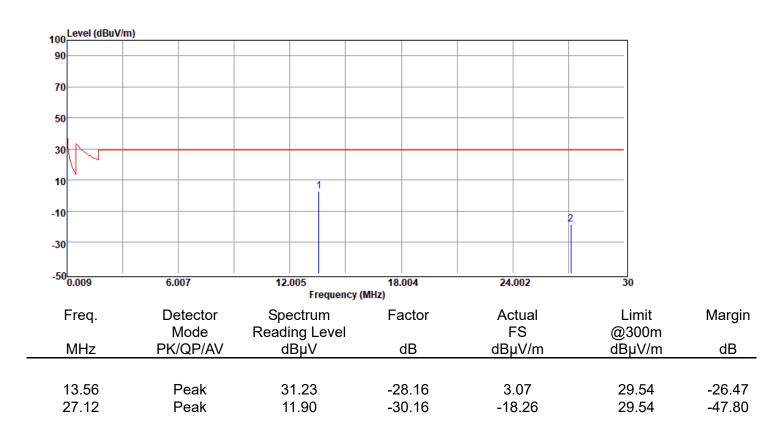

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 48 of 73


Report Number :E2/2019/90049 Test Date :2020-01-17

Operation Mode :802.11n20/B1 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

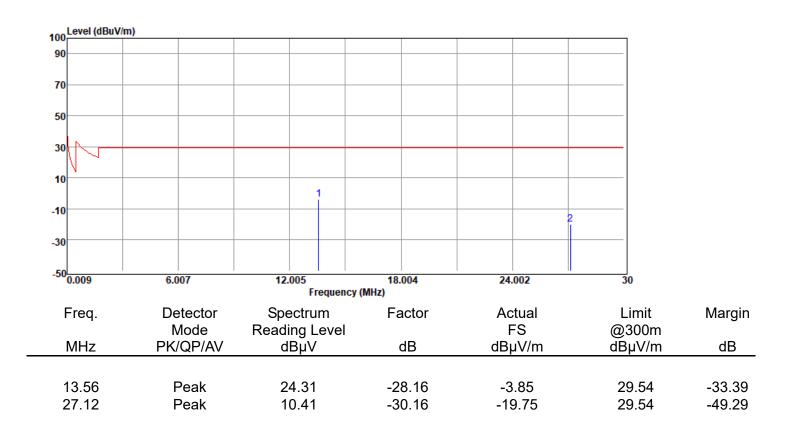

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 49 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

Operation Mode :802.11n20/B1 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

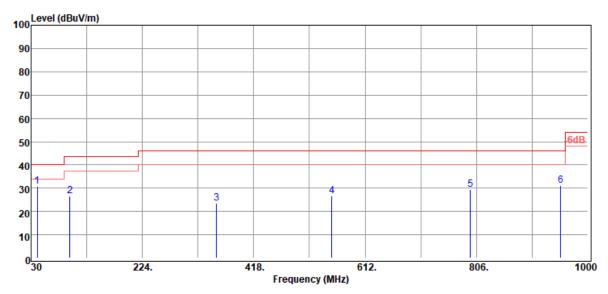

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBuV	dB	FS dBµV/m	@3m dBµV/m	dB
IVITZ	PN/QP/AV	иБμν	uБ	ασμν/ΙΙΙ	ασμν/ιιι	UD
40.67	Peak	40.00	-9.33	30.67	40.00	-9.33
97.90	Peak	42.59	-9.33 -15.99	26.60	43.50	-9.33 -16.90
353.01	Peak	32.62	-9.13	23.49	46.00	-22.51
553.80	Peak	30.06	-3.31	26.75	46.00	-19.25
795.33	Peak	29.34	0.22	29.56	46.00	-16.44
952.47	Peak	29.88	1.37	31.25	46.00	-14.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 50 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

Operation Mode :802.11n20/B1 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

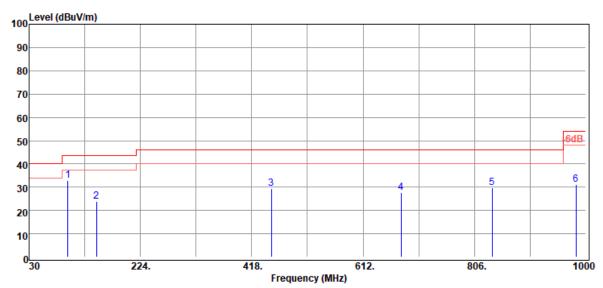

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
97.90	Peak	48.90	-15.99	32.91	43.50	-10.59
147.37	Peak	37.35	-13.56	23.79	43.50	-19.71
451.95	Peak	35.14	-5.87	29.27	46.00	-16.73
677.96	Peak	29.81	-2.04	27.77	46.00	-18.23
837.04	Peak	29.68	0.10	29.78	46.00	-16.22
982.54	Peak	29.27	1.82	31.09	54.00	-22.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 51 of 73


Report Number :E2/2019/90049 Test Date :2020-01-17

Operation Mode :802.11n20/B1 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

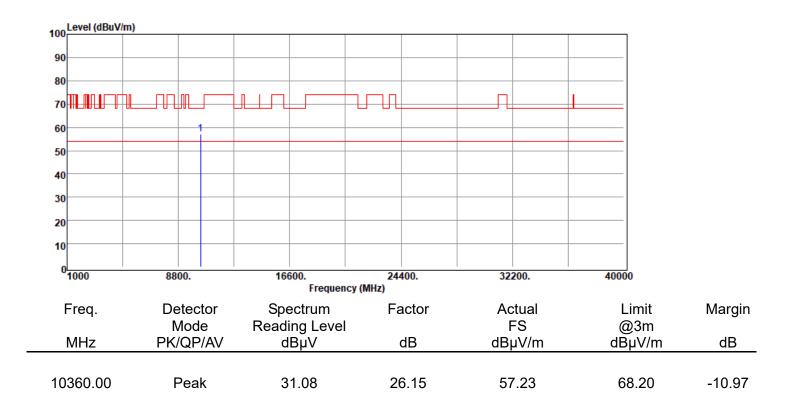

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 52 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

Operation Mode :802.11n20/B1 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

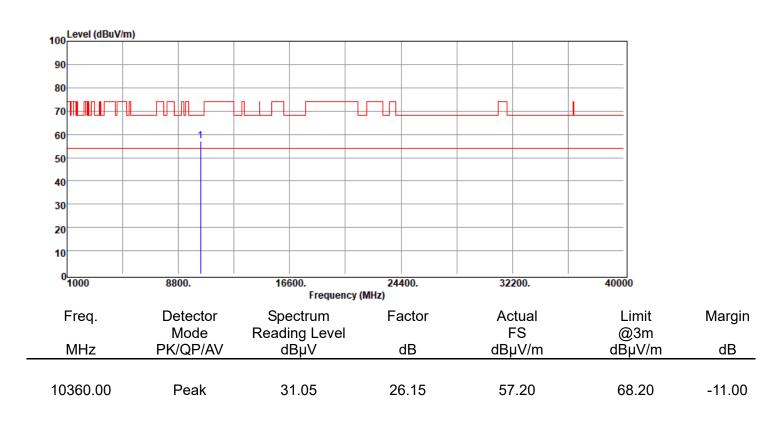

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



:Ashton

Page: 53 of 73

Engineer

WIFI+LTE


Report Number **Test Date** :E2/2019/90049 :2019-11-14

:802.11b + LTE B30 **Operation Mode** Temp./Humi. :22.1/56

Test Channel :2412 MHz + 2310 MHz Antenna Pol. :VERTICAL

Test Mode :TX

EUT Pol :E2 Plan

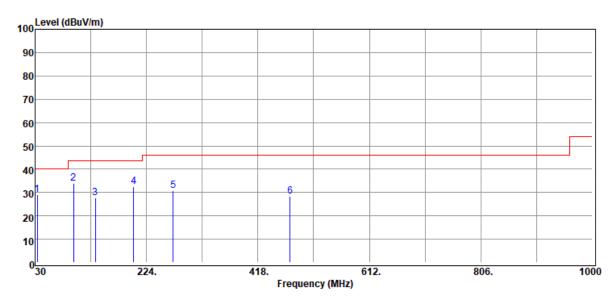

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
33.88	Peak	35.01	-6.05	28.96	40.00	-11.04
96.93	Peak	51.64	-17.66	33.98	43.50	-9.52
134.76	Peak	42.00	-14.48	27.52	43.50	-15.98
201.69	Peak	49.96	-17.41	32.55	43.50	-10.95
270.56	Peak	44.64	-13.68	30.96	46.00	-15.04
474.26	Peak	37.26	-8.72	28.54	46.00	-17.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:Ashton

Page: 54 of 73

Engineer


Report Number **Test Date** :E2/2019/90049 :2019-12-30

Operation Mode :802.11b + LTE B30 Temp./Humi. :22.1/56

Test Channel :2412 MHz + 2310 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX

EUT Pol :E2 Plan

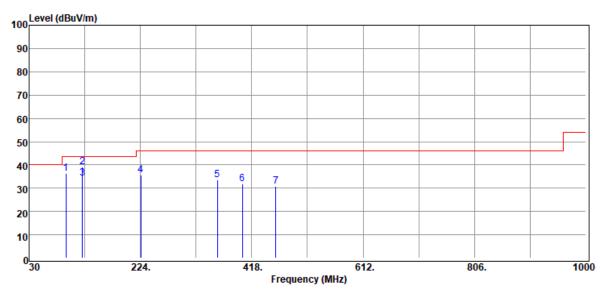

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
94.02	Peak	54.65	-18.16	36.49	43.50	-7.01
123.12	Peak	52.08	-12.84	39.24	43.50	-4.26
123.12	QP	48.97	-14.73	34.24	43.50	-9.26
224.97	Peak	52.60	-16.89	35.71	46.00	-10.29
357.86	Peak	45.58	-12.07	33.51	46.00	-12.49
401.51	Peak	41.81	-10.02	31.79	46.00	-14.21
459.71	Peak	40.36	-9.60	30.76	46.00	-15.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 55 of 73


Report Number **Test Date** :E2/2019/90049 :2019-11-14

Operation Mode :802.11b + LTE B30 Temp./Humi. :23.1/57

Test Channel :2412 MHz + 2310 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

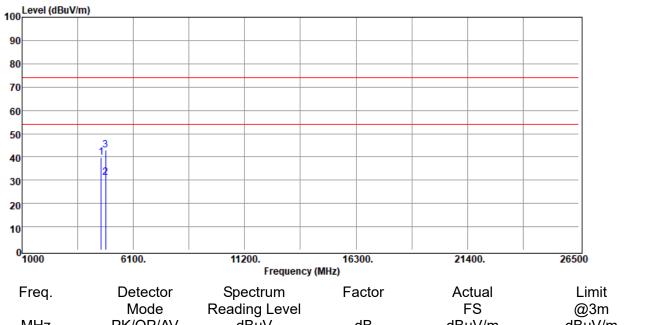

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
						_
4620.00	Peak	28.80	10.90	39.70	74.00	-34.30
4824.00	Average	20.10	11.01	31.11	54.00	-22.89
4824.00	Peak	31.80	11.01	42.81	74.00	-31.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 56 of 73


Report Number **Test Date** :E2/2019/90049 :2019-11-14

Operation Mode :802.11b + LTE B30 Temp./Humi. :23.1/57

Test Channel :2412 MHz + 2310 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

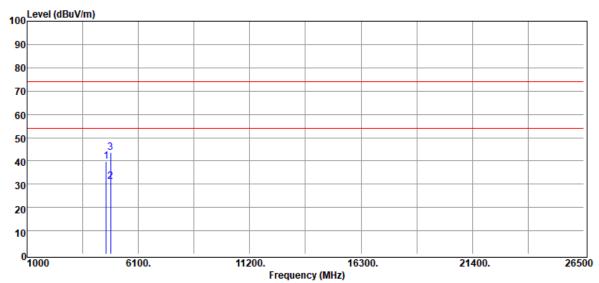

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4620.00	Peak	28.85	10.90	39.75	74.00	-34.25
4824.00	Average	20.05	11.01	31.06	54.00	-22.94
4824.00	Peak	32.45	11.01	43.46	74.00	-30.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 57 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

:802.11a + LTE B30 **Operation Mode** Temp./Humi. :21.4/67

Test Channel :5220 MHz + 2310 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

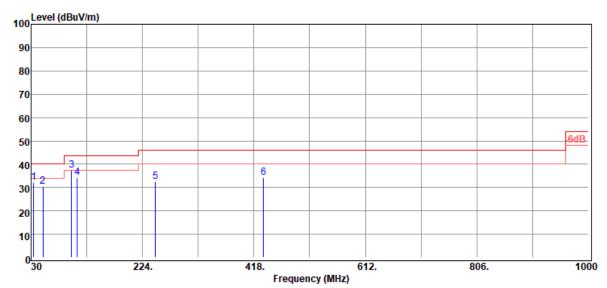

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
34.85	Peak	37.64	-5.52	32.12	40.00	-7.88
50.37	Peak	46.95	-16.61	30.34	40.00	-9.66
100.81	Peak	52.91	-15.47	37.44	43.50	-6.06
110.51	Peak	48.17	-14.05	34.12	43.50	-9.38
246.31	Peak	44.59	-12.05	32.54	46.00	-13.46
434.49	Peak	40.44	-6.03	34.41	46.00	-11.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 58 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

:802.11a + LTE B30 **Operation Mode** Temp./Humi. :21.4/67

Test Channel :5220 MHz + 2310 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

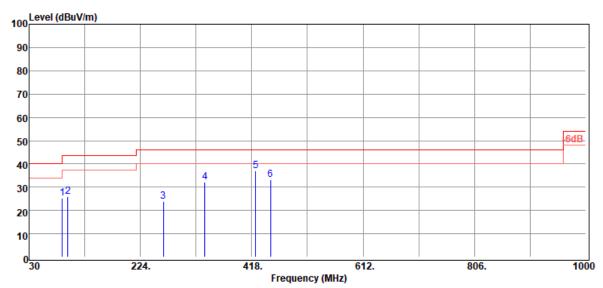

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dBμV/m	dB
88.20	Peak	42.82	-17.45	25.37	43.50	-18.13
97.90	Peak	42.00	-15.99	26.01	43.50	-17.49
263.77	Peak	34.40	-10.67	23.73	46.00	-22.27
336.52	Peak	41.69	-9.50	32.19	46.00	-13.81
424.79	Peak	43.06	-6.20	36.86	46.00	-9.14
450.98	Peak	39.05	-5.88	33.17	46.00	-12.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested and study are retained to 30 days only.

Physical Ref Results (1990) with the sample (s) tested to 1990 wit Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 59 of 73


Report Number :E2/2019/90049 Test Date :2020-01-06

Operation Mode :802.11a + LTE B30 Temp./Humi. :21.1/71

Test Channel :5220 MHz + 2310 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

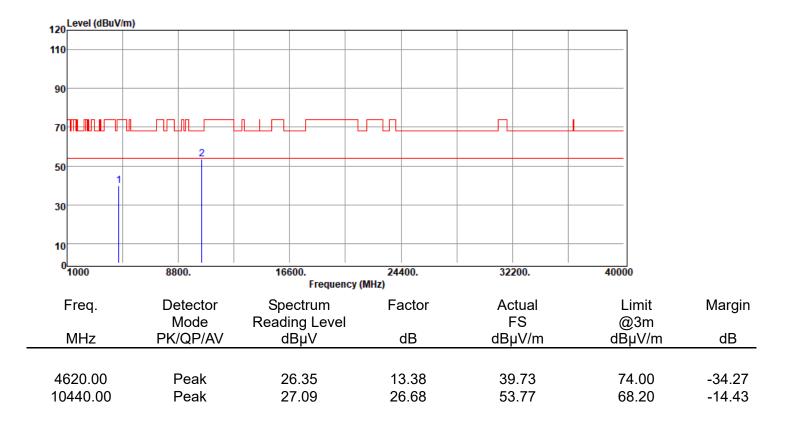

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 60 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-06

:802.11a + LTE B30 **Operation Mode** Temp./Humi. :21.1/71

Test Channel :5220 MHz + 2310 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

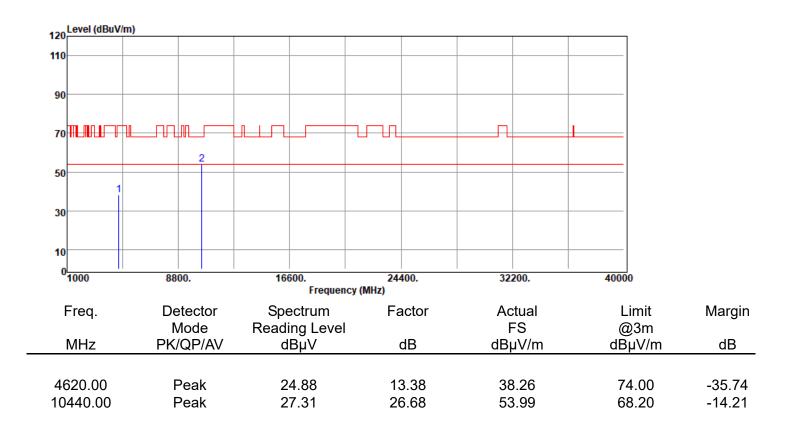

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 61 of 73

WIFI+LTE+NFC


Report Number :E2/2019/90049 Test Date :2020-01-17

Operation Mode :802.11n20/B1 + LTE B30 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2310 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

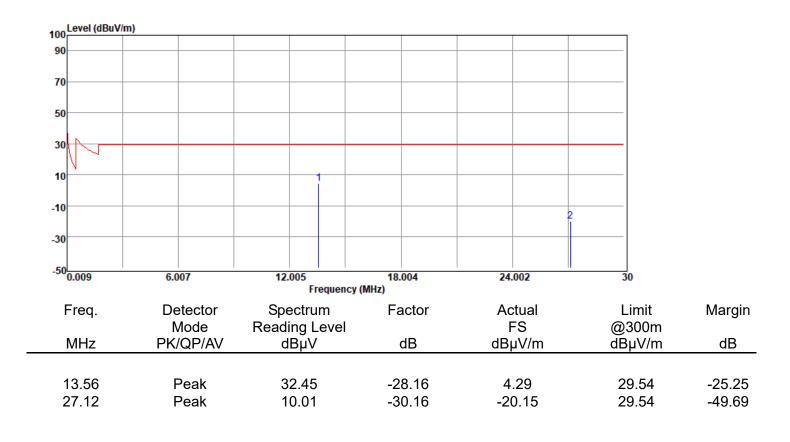

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 62 of 73


Report Number :E2/2019/90049 Test Date :2020-01-17

Operation Mode :802.11n20/B1 + LTE B30 + NFC Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2310 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

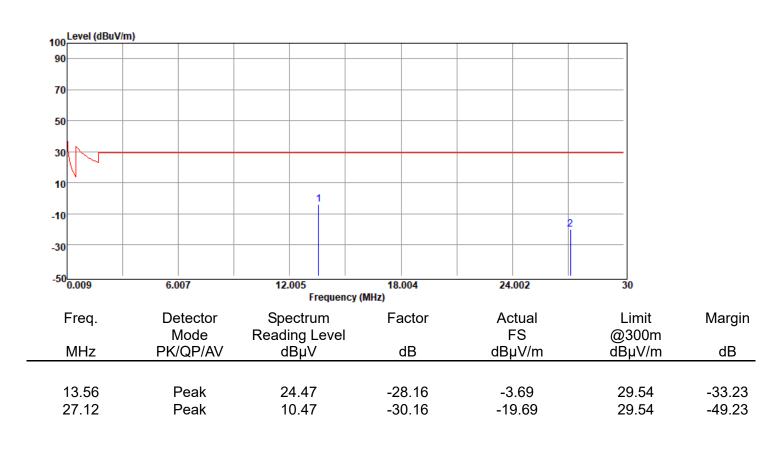

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 63 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

:802.11n20/B1 + LTE B30 + NFC **Operation Mode** Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2310 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

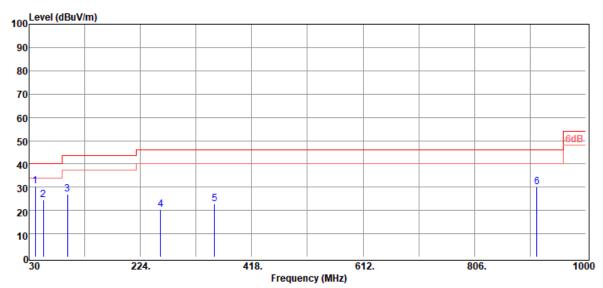

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dBμV/m	dB
40.67	Peak	39.75	-9.33	30.42	40.00	-9.58
55.22	Peak	44.28	-19.82	24.46	40.00	-15.54
96.93	Peak	43.01	-16.13	26.88	43.50	-16.62
258.92	Peak	30.80	-10.49	20.31	46.00	-25.69
353.01	Peak	32.08	-9.13	22.95	46.00	-23.05
914.64	Peak	29.11	1.10	30.21	46.00	-15.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 64 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

:802.11n20/B1 + LTE B30 + NFC **Operation Mode** Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2310 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

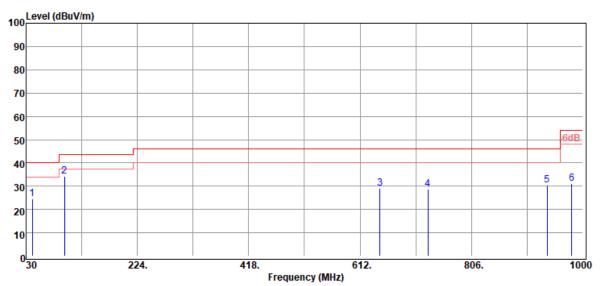

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
40.67	Peak	34.05	-9.33	24.72	40.00	-15.28
96.93	Peak	50.28	-16.13	34.15	43.50	-9.35
646.92	Peak	31.11	-2.10	29.01	46.00	-16.99
730.34	Peak	30.73	-2.05	28.68	46.00	-17.32
937.92	Peak	28.93	1.36	30.29	46.00	-15.71
980.60	Peak	29.13	1.87	31.00	54.00	-23.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 65 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

:802.11n20/B1 + LTE B30 + NFC **Operation Mode** Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2310 MHz + 13.56 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

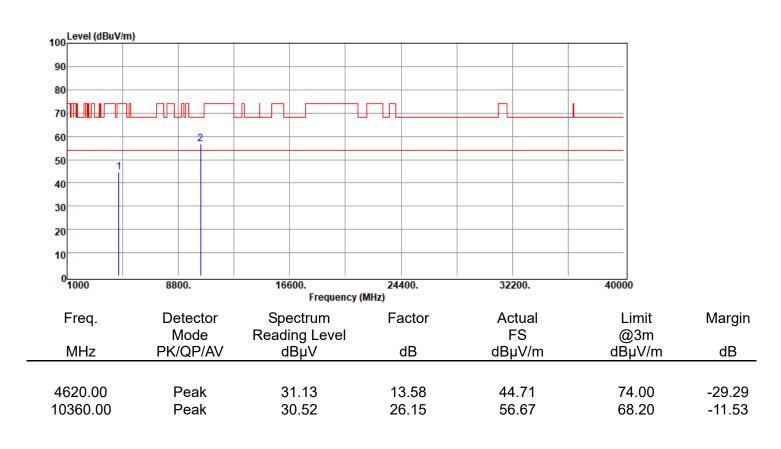

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 66 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-17

:802.11n20/B1 + LTE B30 + NFC **Operation Mode** Temp./Humi. :22.4/58

Test Channel :5180 MHz + 2310 MHz + 13.56 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Enzo

EUT Pol :E2 Plan

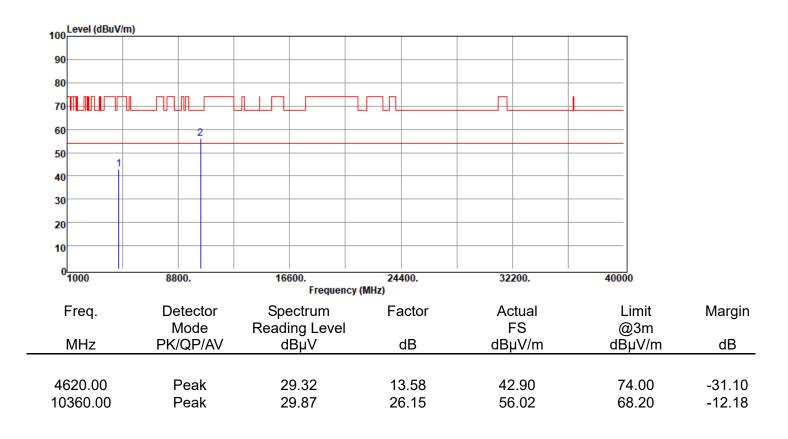

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 67 of 73

BT+LTE


Report Number **Test Date** :E2/2019/90049 :2020-01-10

:LTE+ BTBR **Operation Mode** Temp./Humi. :22.8/58

Test Channel :2310 MHz + 2441 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

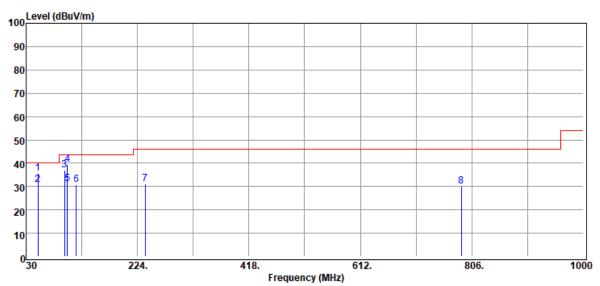

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
50.37	Peak	52.35	-16.61	35.74	40.00	-4.26
50.37	QP	47.50	-16.61	30.89	40.00	-9.11
96.93	Peak	53.17	-16.13	37.04	43.50	-6.46
101.78	Peak	54.68	-15.21	39.47	43.50	-4.03
101.78	QP	46.33	-15.21	31.12	43.50	-12.38
117.30	Peak	43.92	-13.17	30.75	43.50	-12.75
237.58	Peak	44.24	-13.24	31.00	46.00	-15.00
787.57	Peak	29.91	0.23	30.14	46.00	-15.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 68 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-10

Operation Mode :LTE+ BTBR Temp./Humi. :22.8/58

Test Channel :2310 MHz + 2441 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

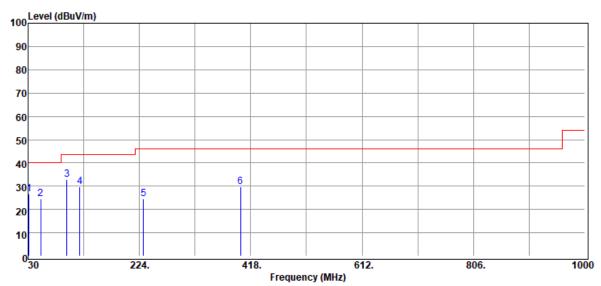

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBμV/m	dB
31.94	Peak	31.07	-4.26	26.81	40.00	-13.19
52.31	Peak	42.53	-18.12	24.41	40.00	-15.59
97.90	Peak	48.70	-15.99	32.71	43.50	-10.79
120.21	Peak	42.63	-12.92	29.71	43.50	-13.79
230.79	Peak	38.49	-14.01	24.48	46.00	-21.52
400.54	Peak	37.31	-7.49	29.82	46.00	-16.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 69 of 73


Report Number :E2/2019/90049 Test Date :2020-01-10

Operation Mode :LTE+ BTBR Temp./Humi. :22.4/60

Test Channel :2310 MHz + 2441 MHz Antenna Pol. :VERTICAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

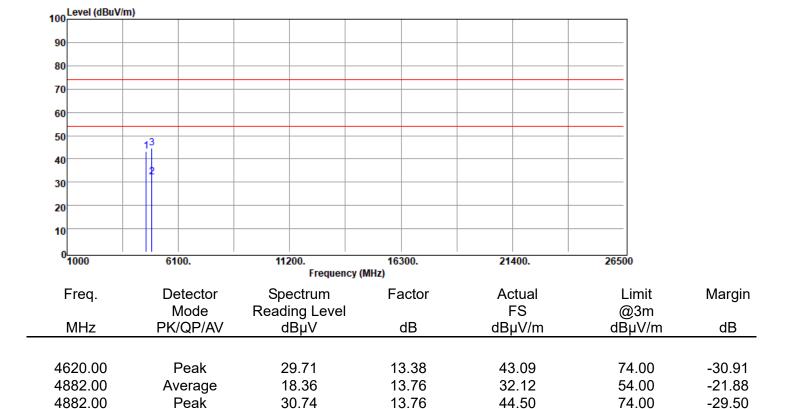

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days or	nly.
以北口上20回 月初中从用供收回24年上降日在来,同时月降日保口2007年,上旬中上后上八日老子北子,子子被从海剿	



Page: 70 of 73


Report Number **Test Date** :E2/2019/90049 :2020-01-10

Operation Mode :LTE+ BTBR Temp./Humi. :22.4/60

Test Channel :2310 MHz + 2441 MHz Antenna Pol. :HORIZONTAL

Test Mode :TX Engineer :Ashton

EUT Pol :E2 Plan

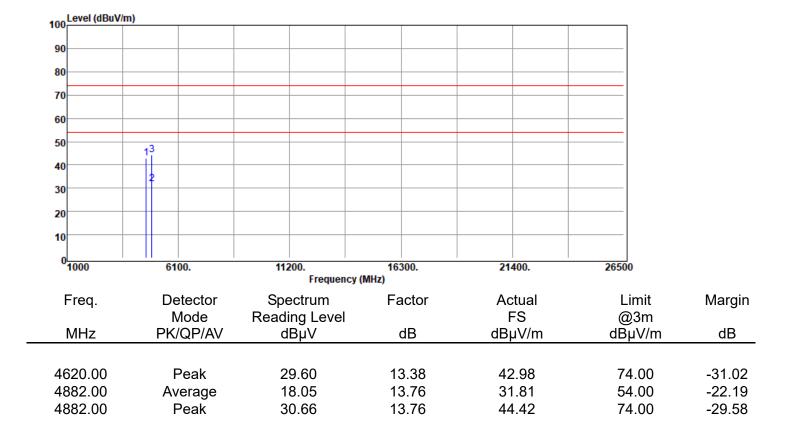

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。