



MID CHANNEL 6 RESULTS

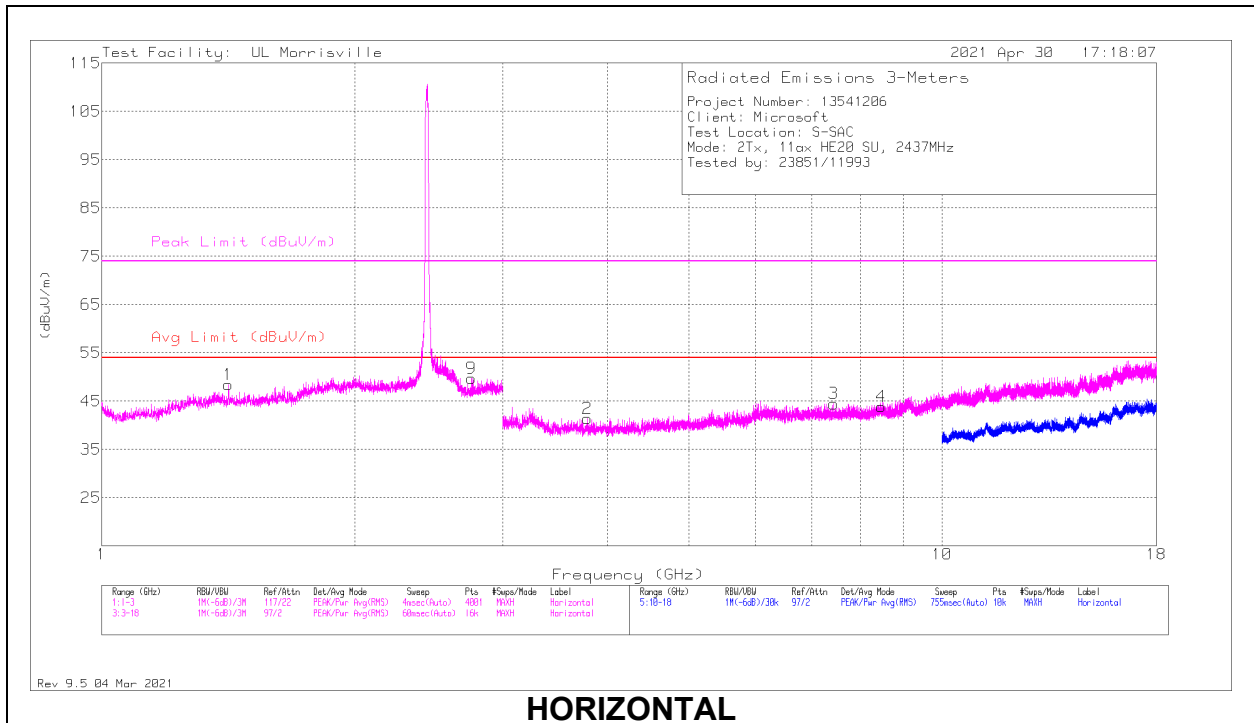

HORIZONTAL

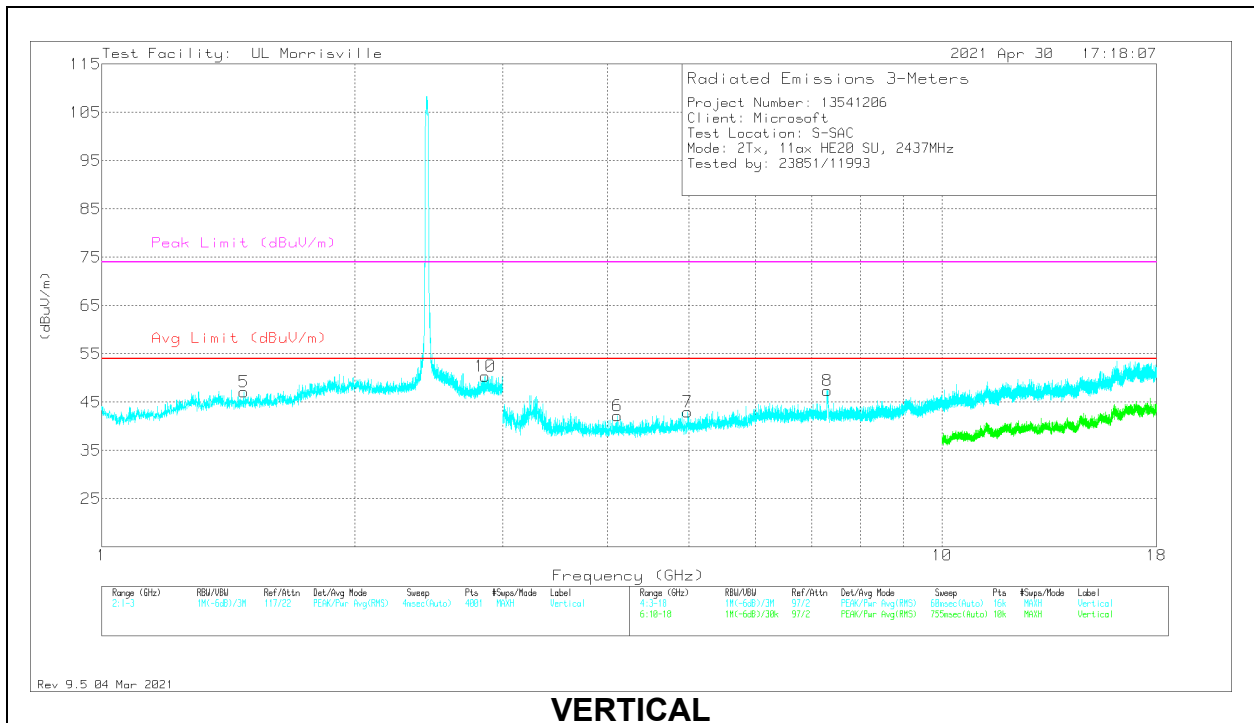



VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 1.41708	42.39	PK2	28.5	-22.7	0	48.19	-	-	74	-25.81	19	109	H
	* ** 1.41408	30.05	ADV	28.5	-22.7	.26	36.11	54	-17.89	-	-	19	109	H
9	* ** 2.75263	43.91	PK2	32.3	-25.8	0	50.41	-	-	74	-23.59	329	219	H
	* ** 2.75452	31.15	ADV	32.3	-25.8	.26	37.91	54	-16.09	-	-	329	219	H
5	* ** 1.476	41.47	Pk	28.2	-22.5	0	47.17	54	-6.83	74	-26.83	0-360	101	V
10	* ** 2.85833	46.79	PK2	32.5	-26	0	53.29	-	-	74	-20.71	112	206	V
	* ** 2.85847	34.52	ADV	32.5	-26	.26	41.28	54	-12.72	-	-	112	206	V
2	* ** 3.78188	40.72	Pk	33.4	-32.7	0	41.42	54	-12.58	74	-32.58	0-360	101	H
3	* ** 7.42969	36.57	Pk	35.6	-27.7	0	44.47	54	-9.53	74	-29.53	0-360	101	H
4	* ** 8.46938	35.02	Pk	35.9	-27	0	43.92	54	-10.08	74	-30.08	0-360	101	H
6	* ** 4.10625	40.76	Pk	33.5	-32.1	0	42.16	54	-11.84	74	-31.84	0-360	200	V
7	* ** 4.98375	40.27	Pk	34	-31.3	0	42.97	54	-11.03	74	-31.03	0-360	101	V
8	* ** 7.31156	39.32	Pk	35.6	-27.5	0	47.42	54	-6.58	74	-26.58	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK2 - Maximum Peak
 ADV - Linear Voltage Average

HIGH CHANNEL 13 RESULTS

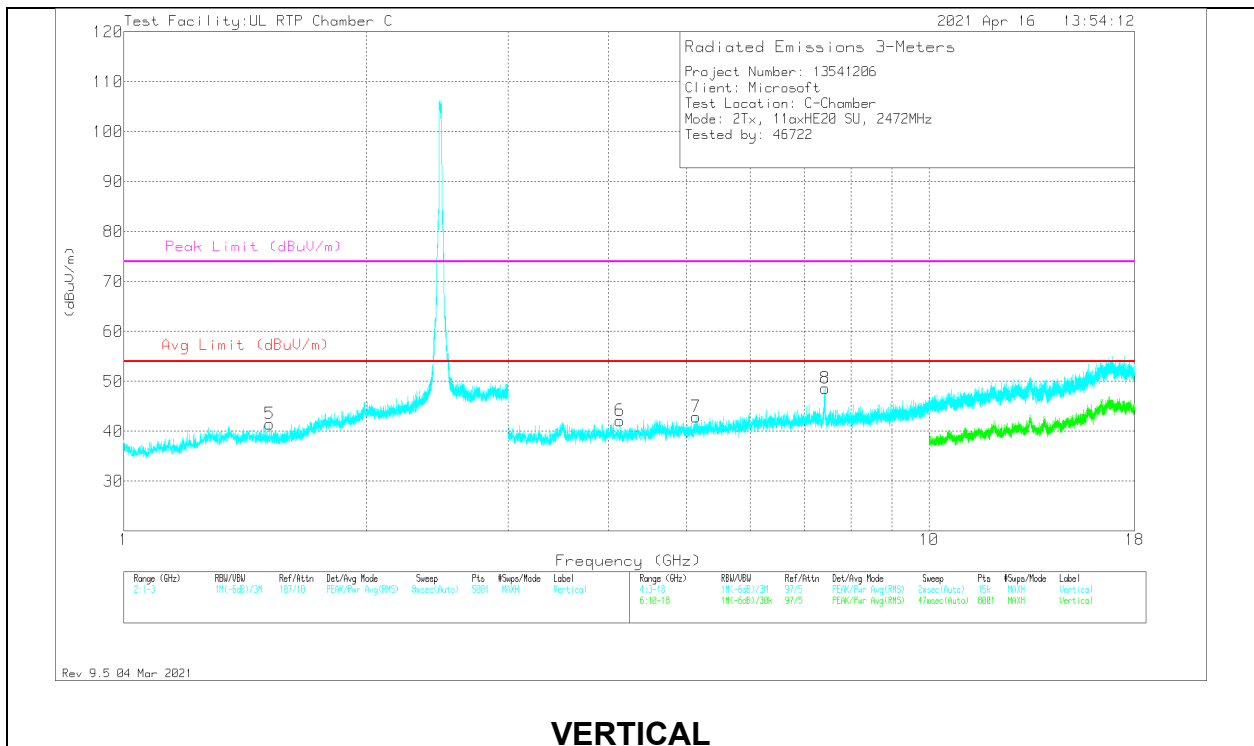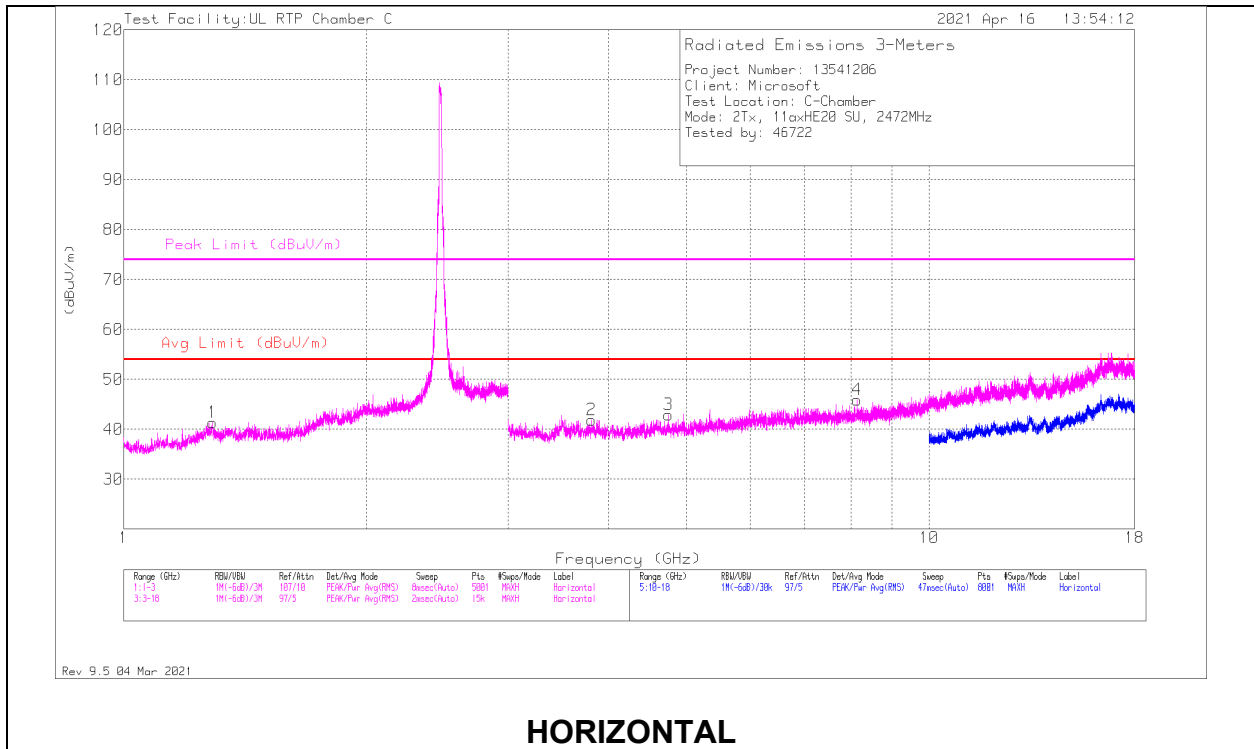

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.2898	32.74	Pk	28.8	-20.2	0	41.34	54	-12.66	74	-32.66	0-360	200	H
5	*** 1.5184	33.32	Pk	28	-19.8	0	41.52	54	-12.48	74	-32.48	0-360	101	V
2	* ** 3.811	55.7	Pk	33.5	-47.3	0	41.9	54	-12.1	74	-32.1	0-360	200	H
3	* ** 4.744	55.83	Pk	34.2	-47.1	0	42.93	54	-11.07	74	-31.07	0-360	200	H
4	* ** 8.146	53.09	Pk	36	-43.2	0	45.89	54	-8.11	74	-28.11	0-360	101	H
6	* ** 4.13	56.8	Pk	33.6	-48.3	0	42.1	54	-11.9	74	-31.9	0-360	200	V
7	* ** 5.136	54.24	Pk	34.3	-45.6	0	42.94	54	-11.06	74	-31.06	0-360	200	V
8	* ** 7.41532	60.86	PK2	35.9	-44.6	0	52.16	-	-	74	-21.84	180	257	V
	* ** 7.41332	46.84	ADV	35.9	-44.7	.26	38.30	54	-15.70	-	-	180	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

BANDEDGE (LOW CHANNEL 1)

HORIZONTAL RESULT

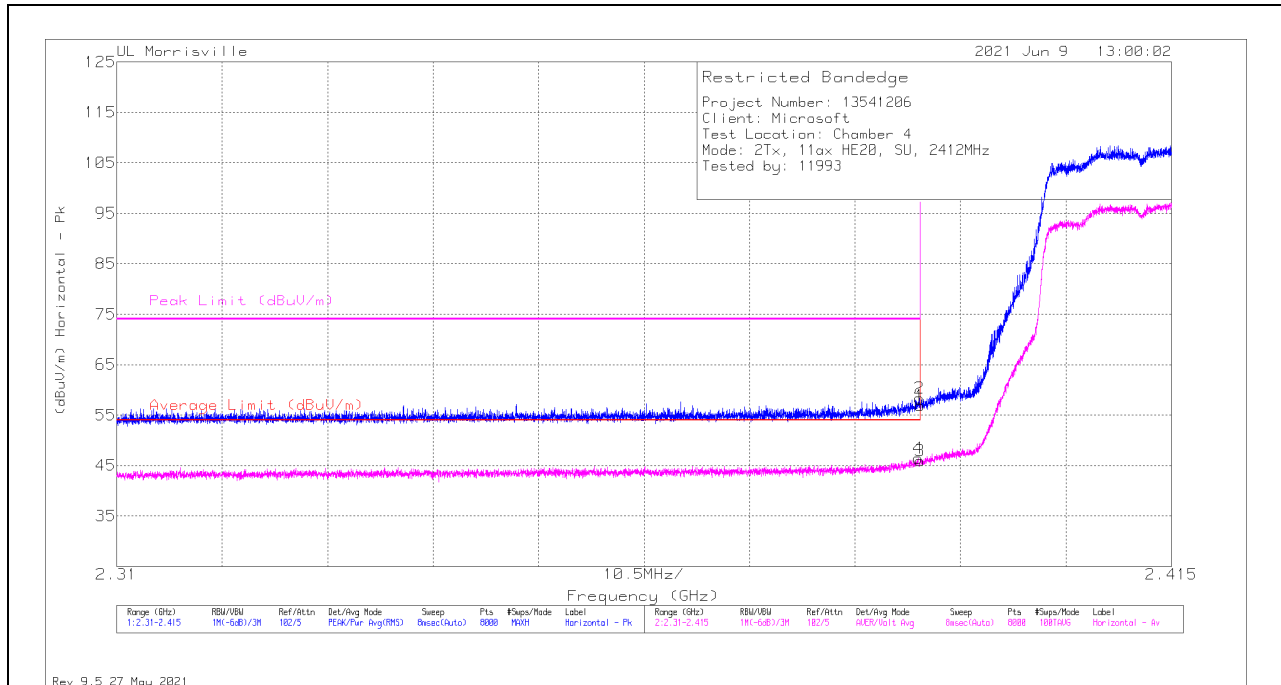

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	28.71	Pk	32	-13.8	10	0	56.91	-	-	74	-17.09	309	107	H
2	* ** 2.38994	30.2	Pk	32	-13.8	10	0	58.4	-	-	74	-15.6	309	107	H
3	* ** 2.39	17.49	ADV	32	-13.8	10	.26	45.95	54	-8.05	-	-	309	107	H
4	* ** 2.3898	17.99	ADV	32	-13.8	10	.26	46.45	54	-7.55	-	-	309	107	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

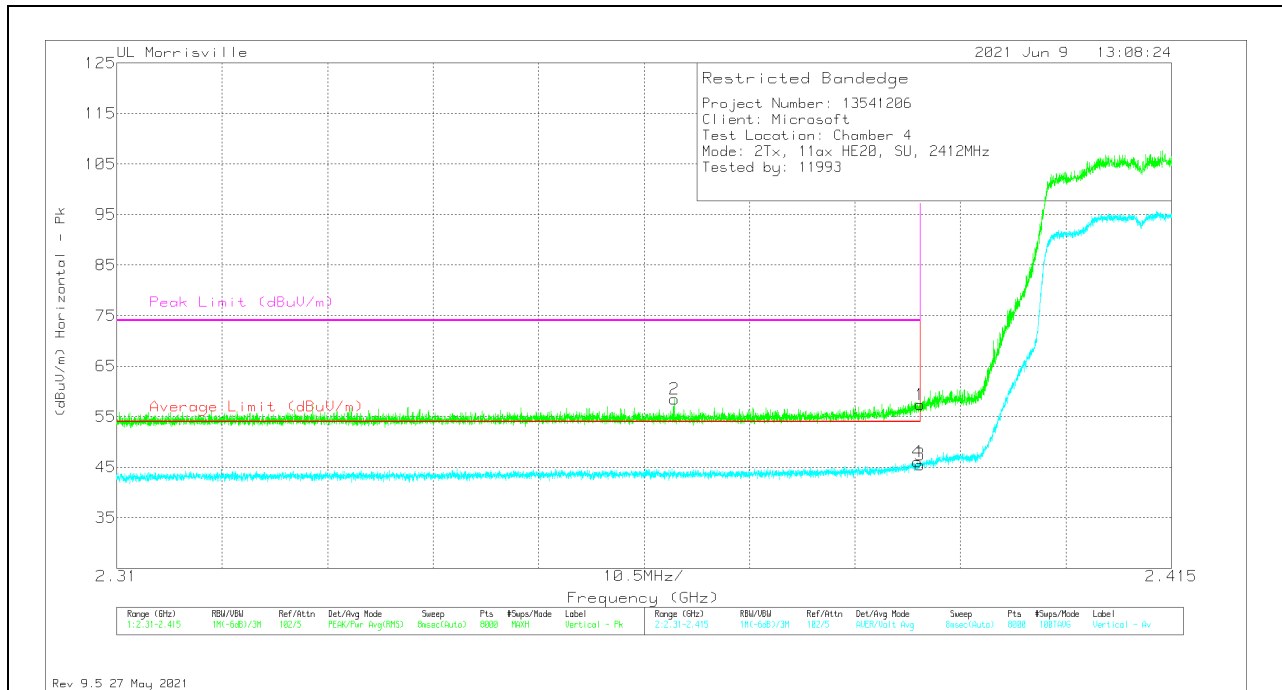


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	29.22	Pk	32	-13.8	10	0	57.42	-	-	74	-16.58	113	185	V
2	* ** 2.36551	30.38	Pk	32	-13.9	10	0	58.48	-	-	74	-15.52	113	185	V
3	* ** 2.39	17.05	ADV	32	-13.8	10	.26	45.51	54	-8.49	-	-	113	185	V
4	* ** 2.38975	17.56	ADV	32	-13.8	10	.26	46.02	54	-7.98	-	-	113	185	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 11)


HORIZONTAL RESULT

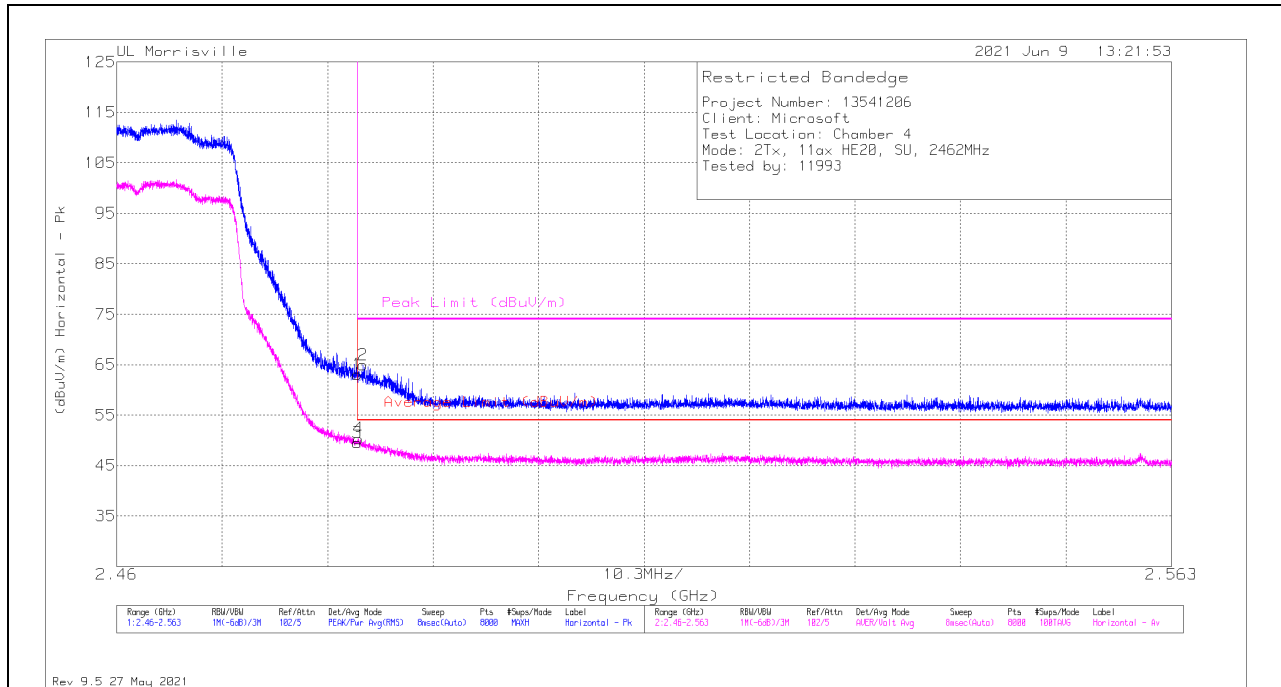

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	34.17	Pk	32.6	-13.7	10	0	63.07	-	-	74	-10.93	321	100	H
2	*** 2.48404	36.09	Pk	32.6	-13.7	10	0	64.99	-	-	74	-9.01	321	100	H
3	*** 2.4835	20.33	ADV	32.6	-13.7	10	.26	49.49	54	-4.51	-	-	321	100	H
4	*** 2.48362	21.19	ADV	32.6	-13.7	10	.26	50.35	54	-3.65	-	-	321	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

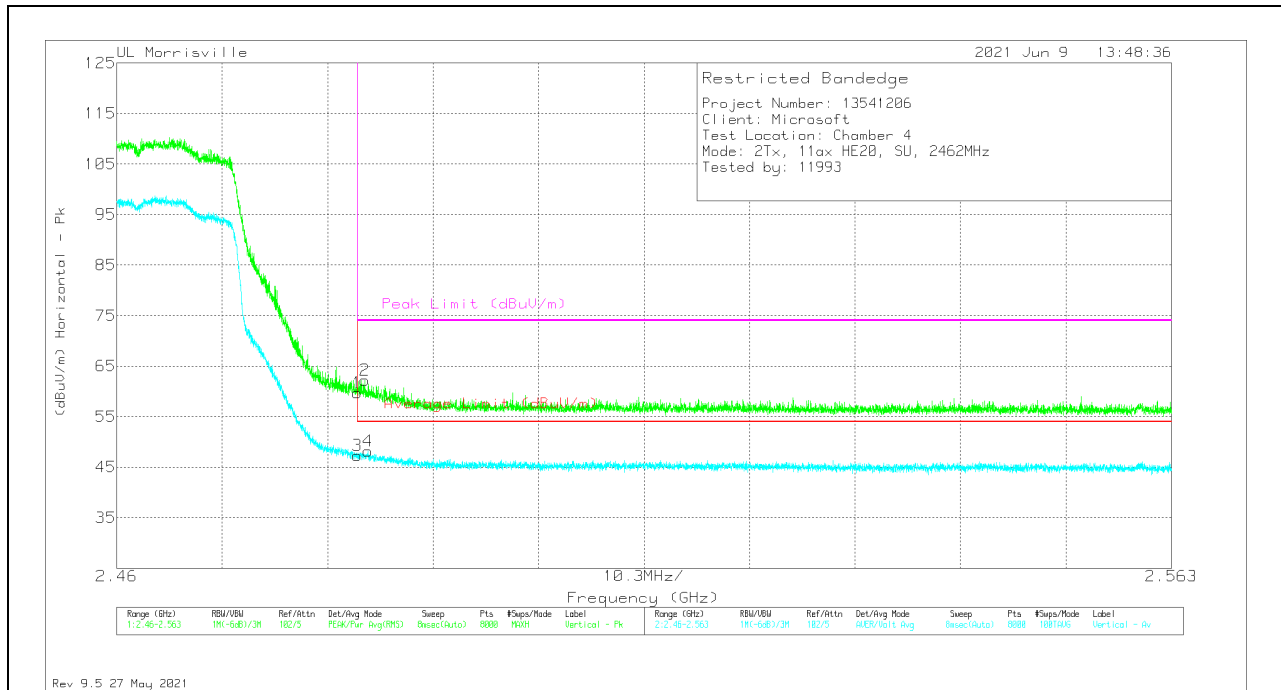


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	30.82	Pk	32.6	-13.7	10	0	59.72	-	-	74	-14.28	290	307	V
2	*** 2.48423	33.33	Pk	32.6	-13.7	10	0	62.23	-	-	74	-11.77	290	307	V
3	*** 2.4835	18.14	ADV	32.6	-13.7	10	.26	47.3	54	-6.7	-	-	290	307	V
4	*** 2.48453	19.06	ADV	32.6	-13.7	10	.26	48.22	54	-5.78	-	-	290	307	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 12)


HORIZONTAL RESULT

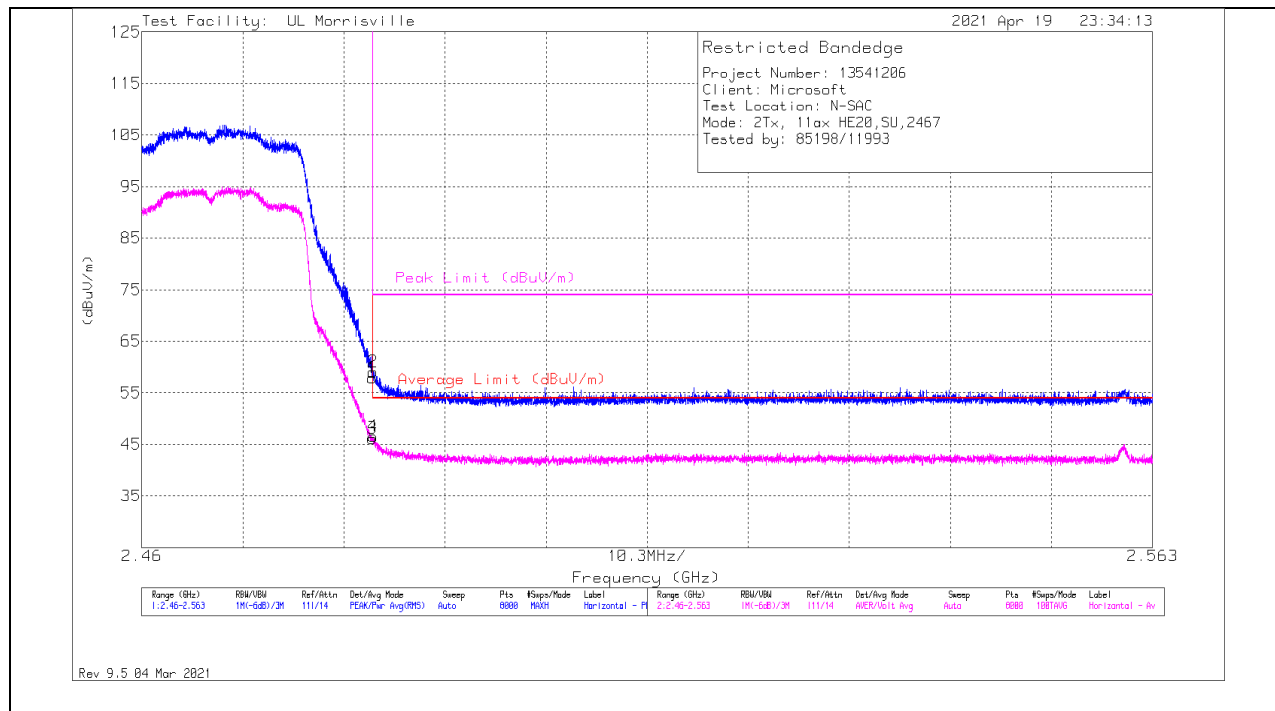

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	39.79	Pk	32.4	-24.3	10	0	57.89	-	-	74	-16.11	252	104	H
2	* ** 2.48354	40.96	Pk	32.4	-24.3	10	0	59.06	-	-	74	-14.94	252	104	H
3	* ** 2.4835	27.8	ADV	32.4	-24.3	10	.26	46.16	54	-7.84	-	-	252	104	H
4	* ** 2.48355	28.17	ADV	32.4	-24.3	10	.26	46.53	54	-7.47	-	-	252	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

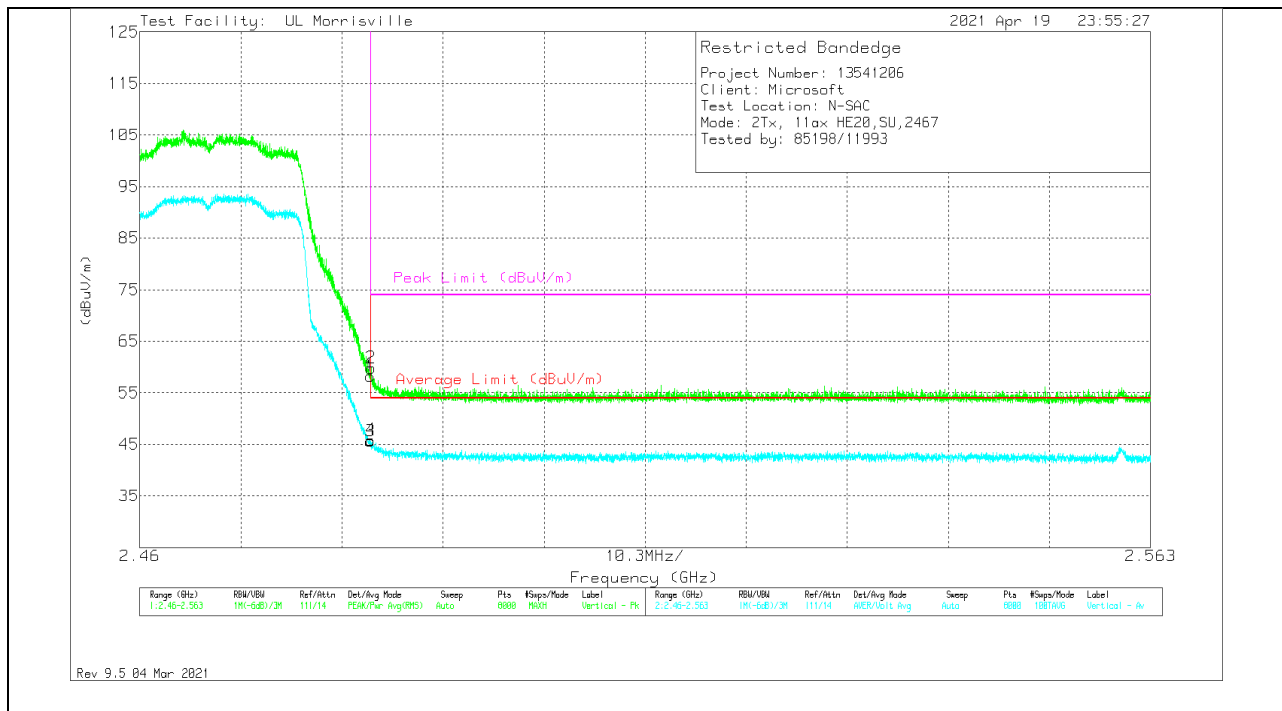

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	40.13	Pk	32.4	-24.3	10	0	58.23	-	-	74	-15.77	237	248	V
2	* ** 2.48356	41.72	Pk	32.4	-24.3	10	0	59.82	-	-	74	-14.18	237	248	V
3	* ** 2.4835	27.26	ADV	32.4	-24.3	10	.26	45.62	54	-8.38	-	-	237	248	V
4	* ** 2.48351	27.46	ADV	32.4	-24.3	10	.26	45.82	54	-8.18	-	-	237	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 13)

HORIZONTAL RESULT

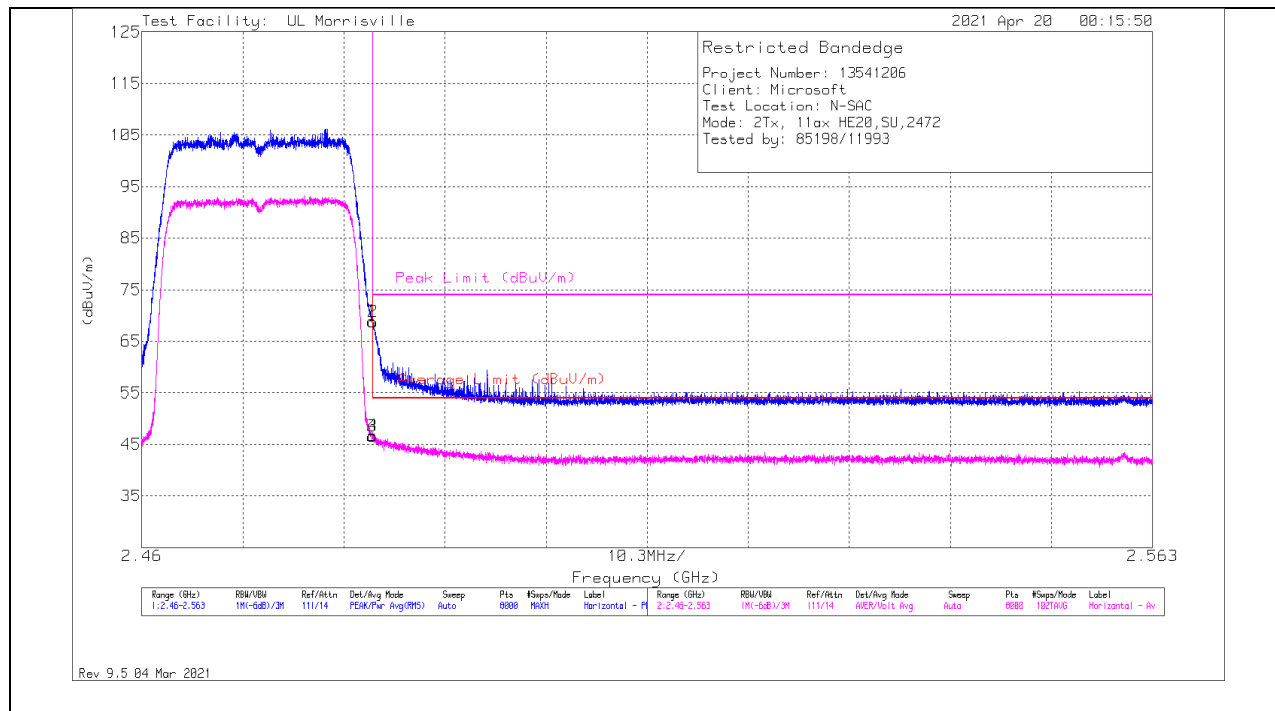

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	50.76	Pk	32.4	-24.3	10	0	68.86	-	-	74	-5.14	26	118	H
2	* ** 2.48356	50.67	Pk	32.4	-24.3	10	0	68.77	-	-	74	-5.23	26	118	H
3	* ** 2.4835	28.2	ADV	32.4	-24.3	10	.26	46.56	54	-7.44	-	-	26	118	H
4	* ** 2.48351	28.35	ADV	32.4	-24.3	10	.26	46.71	54	-7.29	-	-	26	118	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

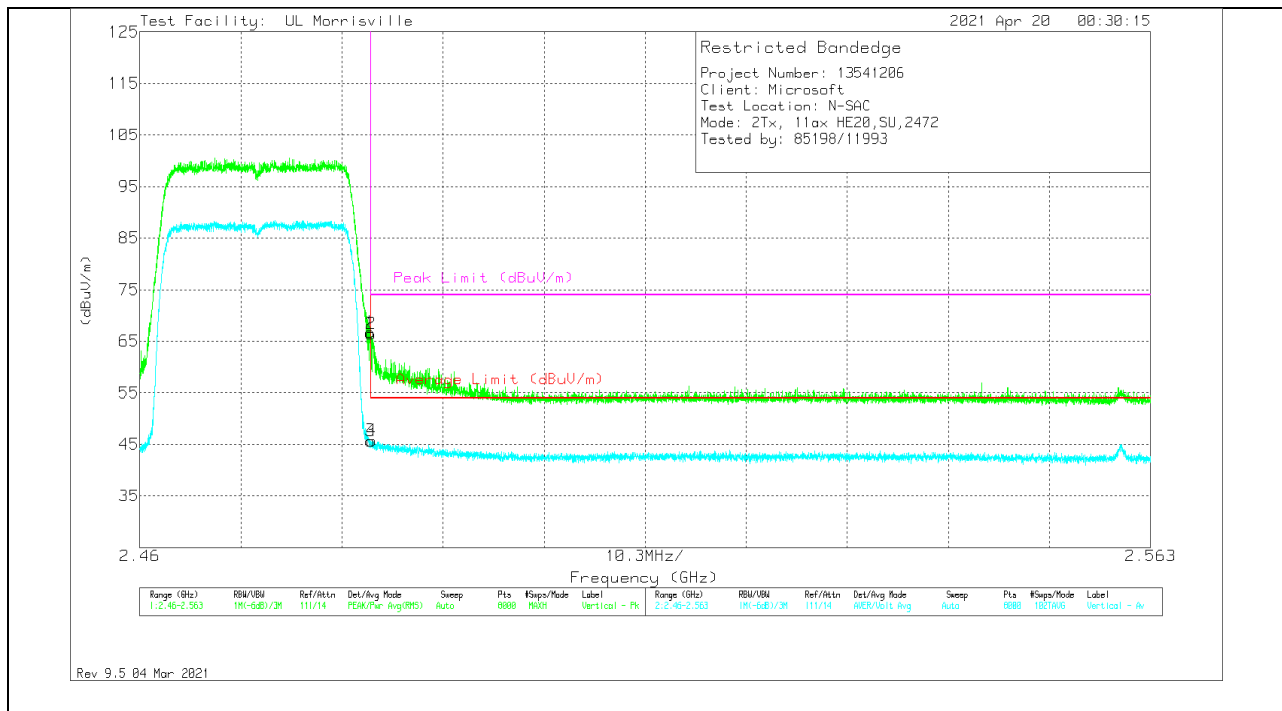

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	48.63	Pk	32.4	-24.3	10	0	66.73	-	-	74	-7.27	240	312	V
2	* ** 2.48354	48.34	Pk	32.4	-24.3	10	0	66.44	-	-	74	-7.56	240	312	V
3	* ** 2.4835	27.3	ADV	32.4	-24.3	10	.26	45.66	54	-8.34	-	-	240	312	V
4	* ** 2.48363	27.36	ADV	32.4	-24.3	10	.26	45.72	54	-8.28	-	-	240	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (LOW CHANNEL 1)

HORIZONTAL RESULT

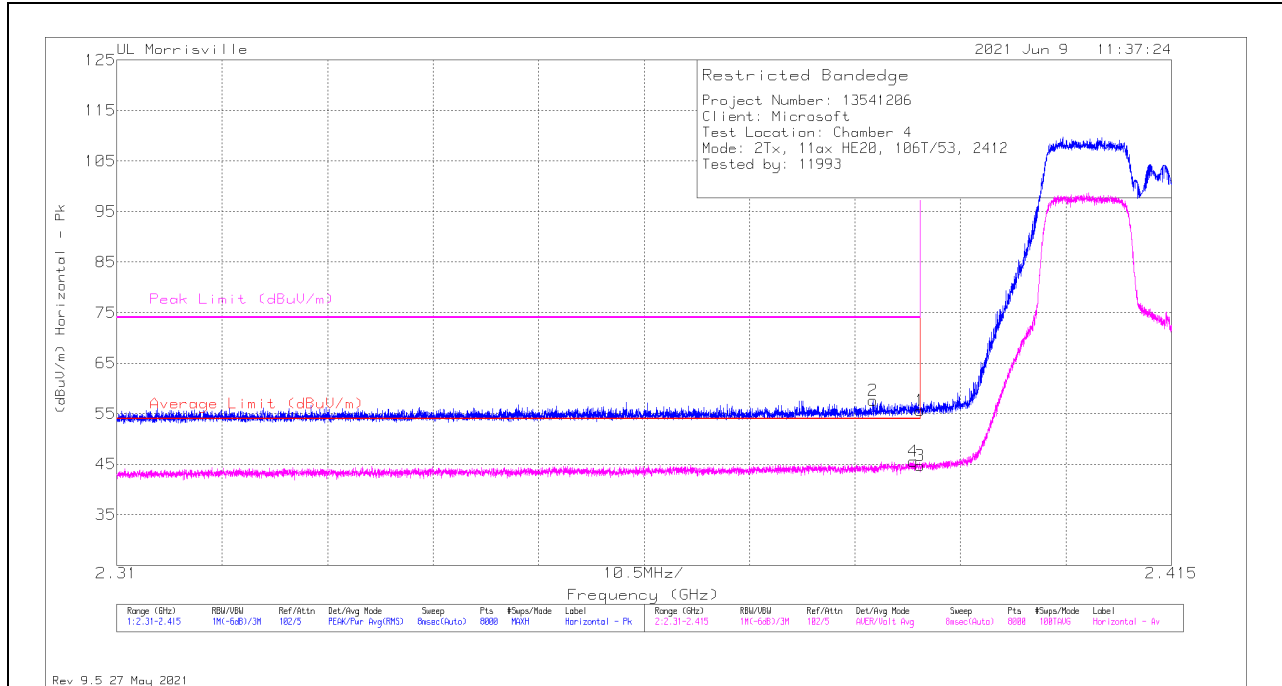

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	27.46	PK	32	-13.8	10	55.66	-	-	74	-18.34	59	312	H
2	*** 2.38527	29.44	PK	32	-13.8	10	57.64	-	-	74	-16.36	59	312	H
3	*** 2.39	16.52	ADV	32	-13.8	10	44.72	54	-9.28	-	-	59	312	H
4	*** 2.38931	17.39	ADV	32	-13.8	10	45.59	54	-8.41	-	-	59	312	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

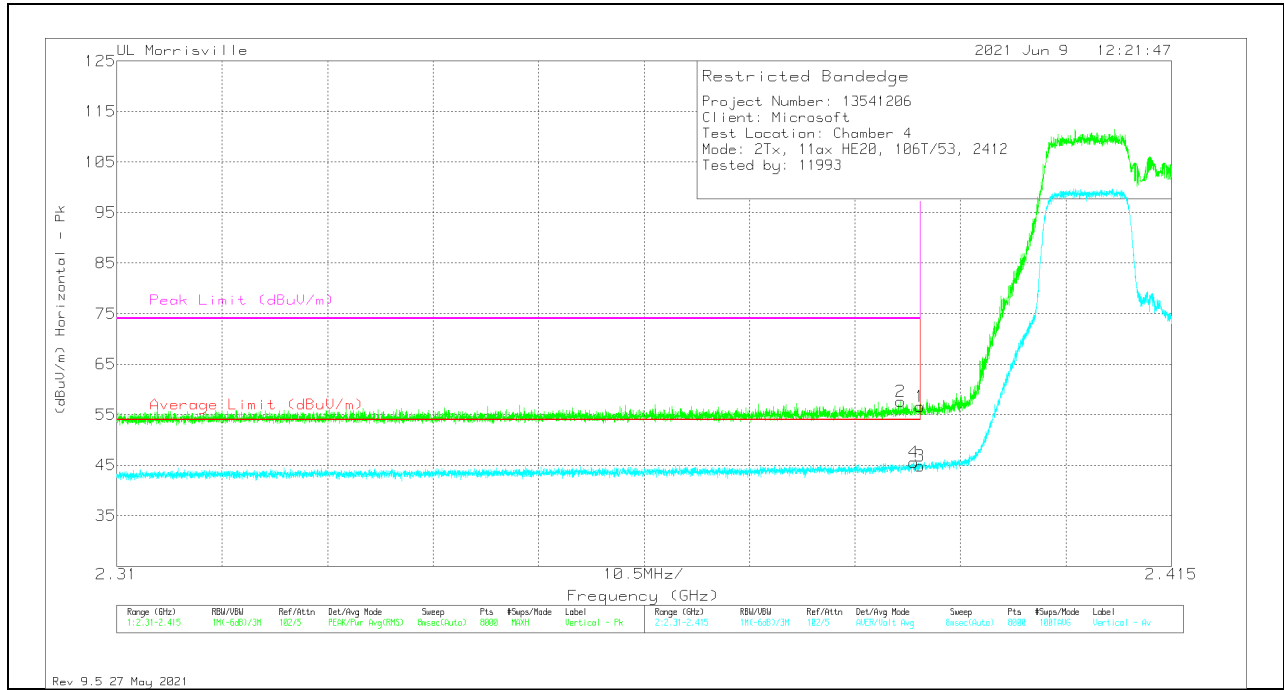


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	28.47	Pk	32	-13.8	10	56.67	-	-	74	-17.33	127	313	V
2	* ** 2.38805	29.4	Pk	32	-13.8	10	57.6	-	-	74	-16.4	127	313	V
3	* ** 2.39	16.62	ADV	32	-13.8	10	44.82	54	-9.18	-	-	127	313	V
4	* ** 2.38937	17.37	ADV	32	-13.8	10	45.57	54	-8.43	-	-	127	313	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (HIGH CHANNEL 11)

HORIZONTAL RESULT

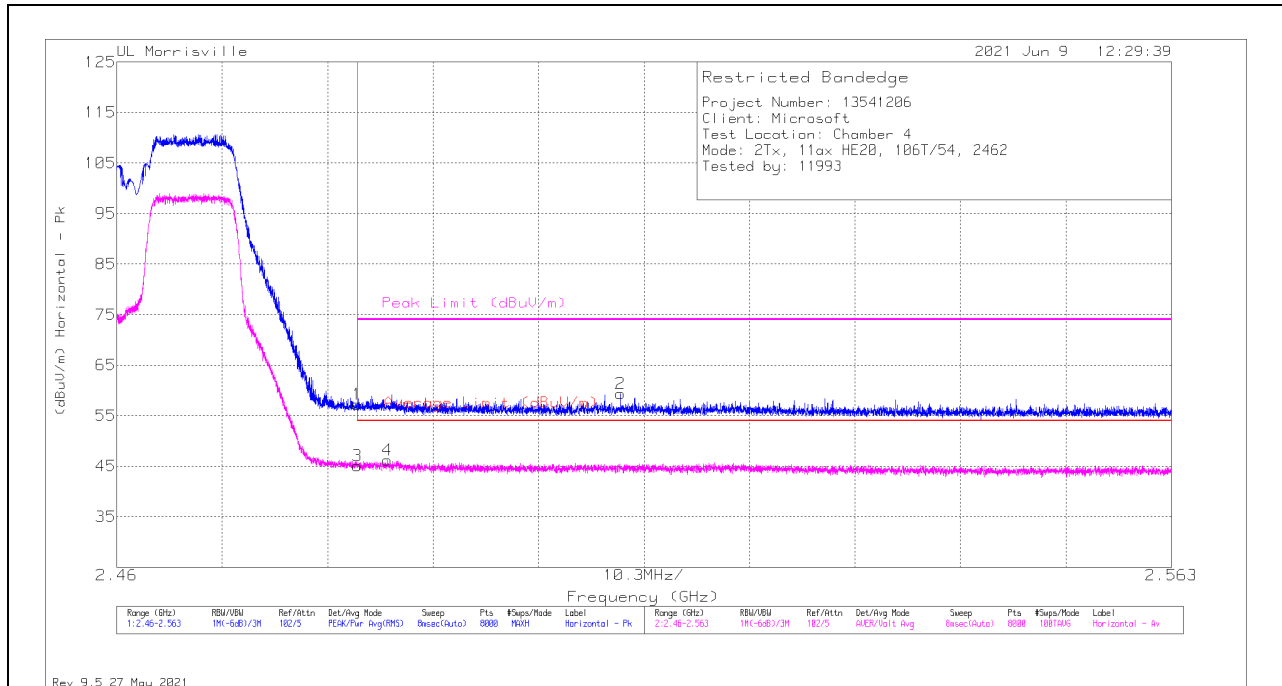

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	28.3	PK	32.6	-13.7	10	57.2	-	-	74	-16.8	316	336	H
2	** 2.50922	30.45	PK	32.5	-13.6	10	59.35	-	-	74	-14.65	316	336	H
3	*** 2.4835	16.2	ADV	32.6	-13.7	10	45.1	54	-8.9	-	-	316	336	H
4	*** 2.48642	17.3	ADV	32.6	-13.7	10	46.2	54	-7.8	-	-	316	336	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

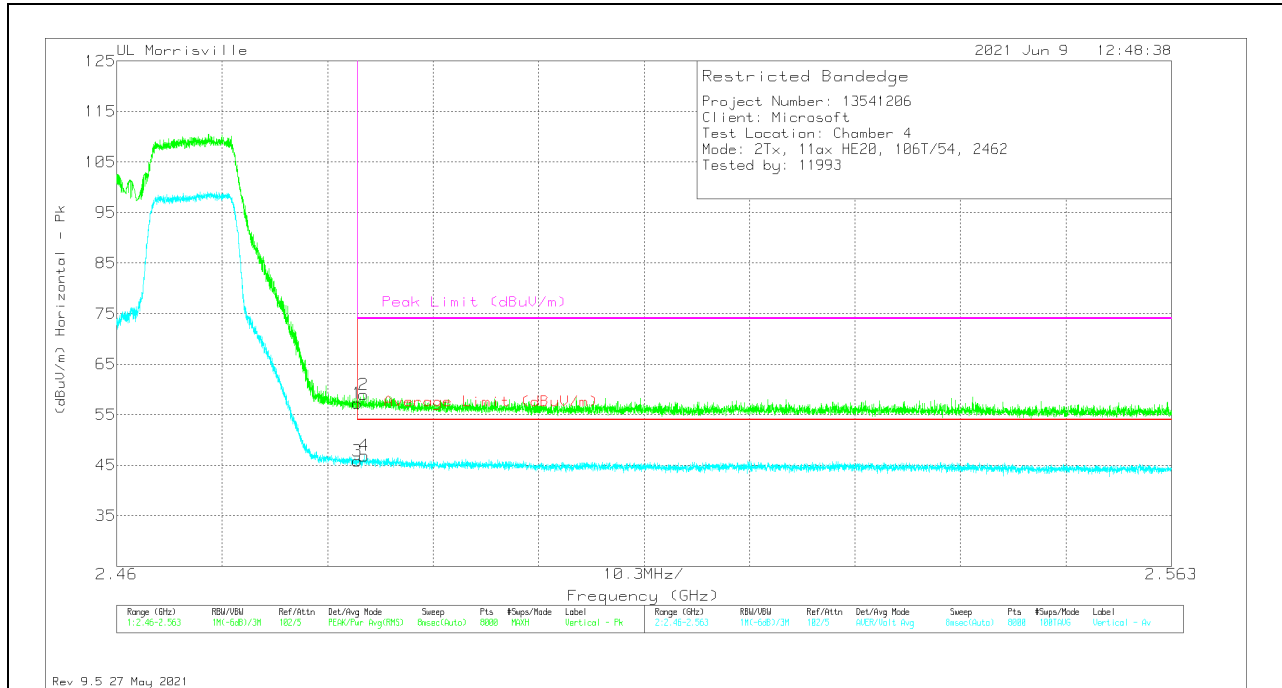


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	28.33	Pk	32.6	-13.7	10	57.23	-	-	74	-16.77	105	275	V
2	*** 2.48413	30.03	Pk	32.6	-13.7	10	58.93	-	-	74	-15.07	105	275	V
3	*** 2.4835	16.93	ADV	32.6	-13.7	10	45.83	54	-8.17	-	-	105	275	V
4	*** 2.48416	17.98	ADV	32.6	-13.7	10	46.88	54	-7.12	-	-	105	275	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEGE (HIGH CHANNEL 12)


HORIZONTAL RESULT

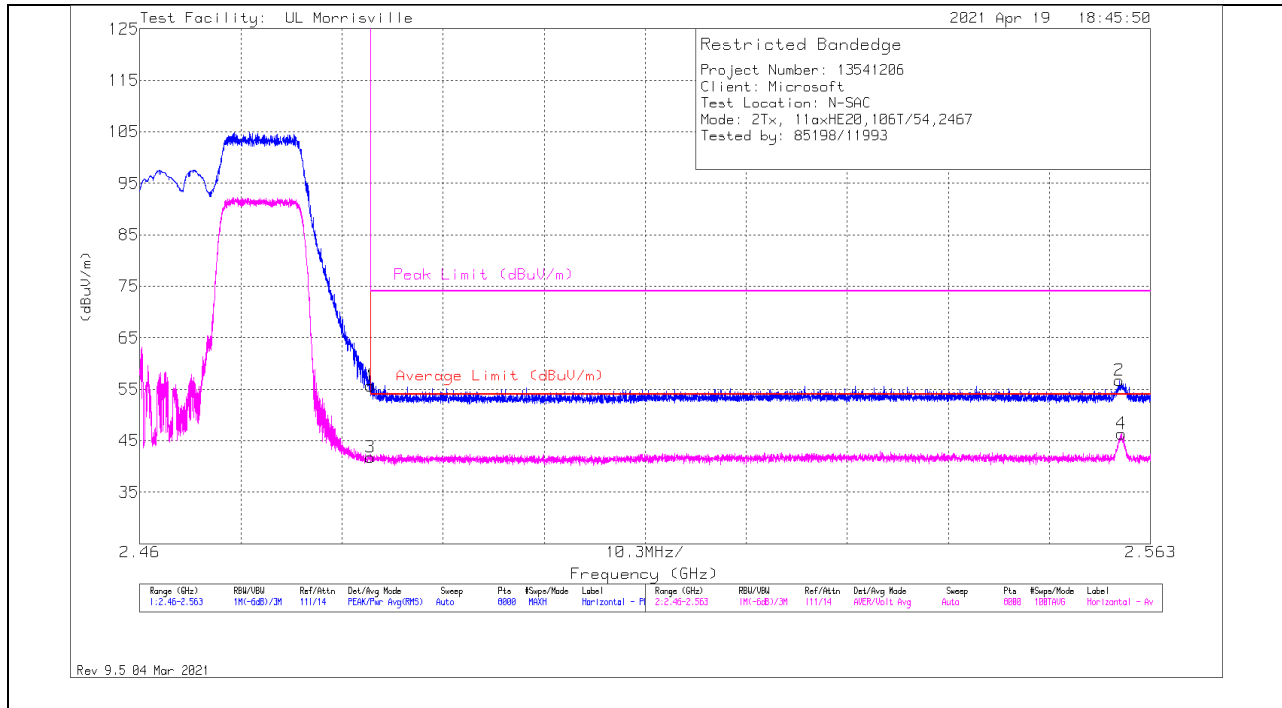

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	37.57	PK	32.4	-24.3	10	55.67	-	-	74	-18.33	269	111	H
2	** 2.5598	38.71	PK	32.3	-24.3	10	56.71	-	-	74	-17.29	269	111	H
3	* ** 2.4835	23.69	ADV	32.4	-24.3	10	41.79	54	-12.21	-	-	269	111	H
4	** 2.56003	28.34	ADV	32.3	-24.3	10	46.34	54	-7.66	-	-	269	111	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

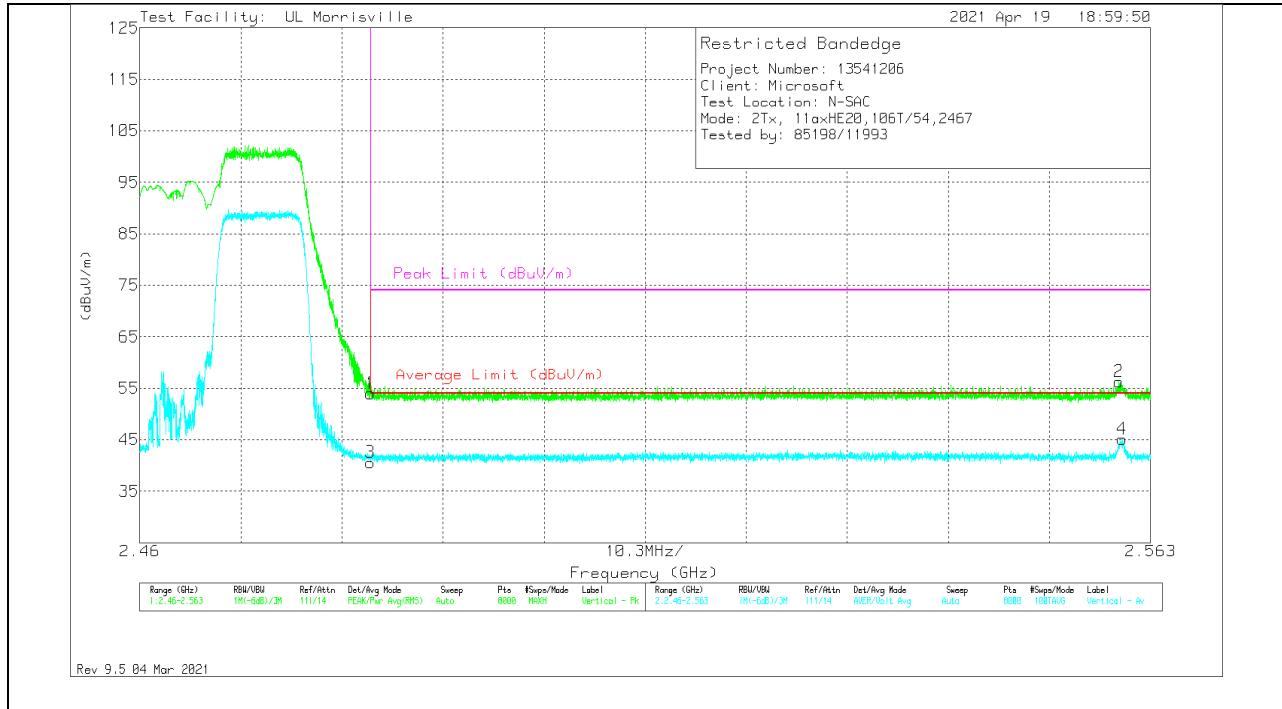

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	35.91	Pk	32.4	-24.3	10	54.01	-	-	74	-19.99	226	283	V
2	** 2.55976	38.3	Pk	32.3	-24.3	10	56.3	-	-	74	-17.7	226	283	V
3	* ** 2.4835	22.46	ADV	32.4	-24.3	10	40.56	54	-13.44	-	-	226	283	V
4	** 2.56011	27.1	ADV	32.3	-24.3	10	45.1	54	-8.9	-	-	226	283	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 13)


HORIZONTAL RESULT

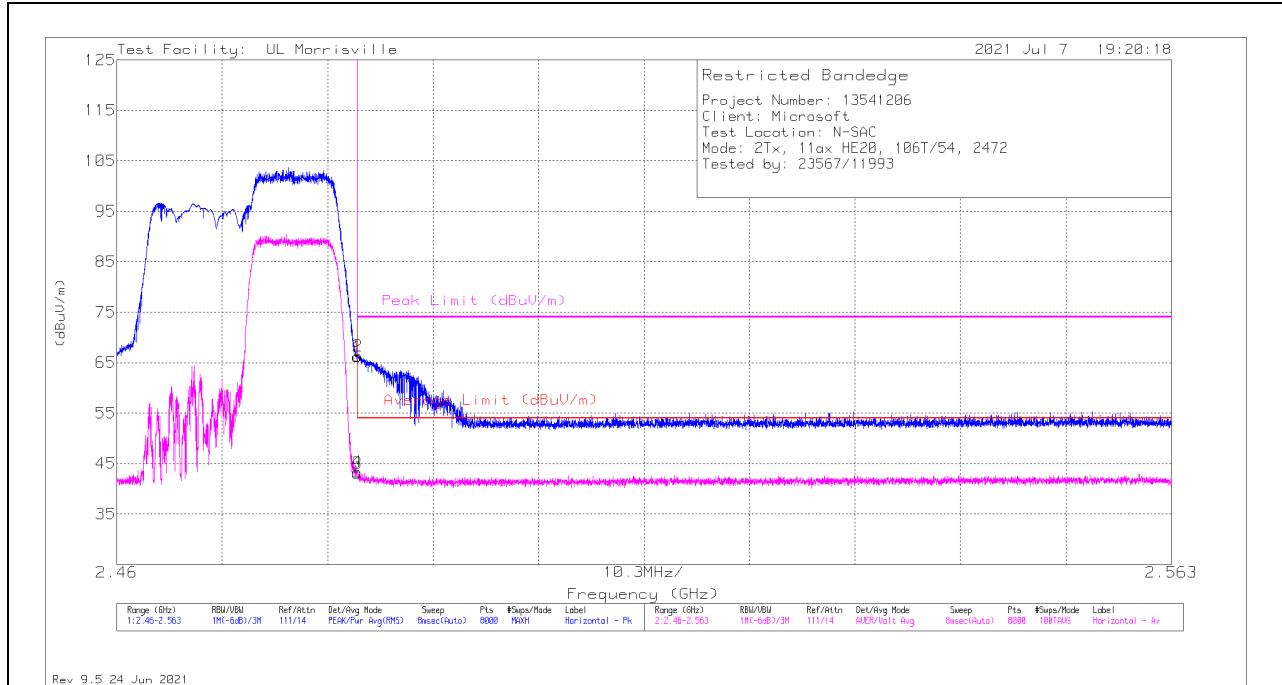

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	48.07	Pk	32.4	-24.3	10	66.17	-	-	74	-7.83	24	186	H
2	*** 2.48358	48.19	Pk	32.4	-24.3	10	66.29	-	-	74	-7.71	24	186	H
3	*** 2.4835	25	ADV	32.4	-24.3	10	43.1	54	-10.9	-	-	24	186	H
4	*** 2.48351	25.2	ADV	32.4	-24.3	10	43.3	54	-10.7	-	-	24	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

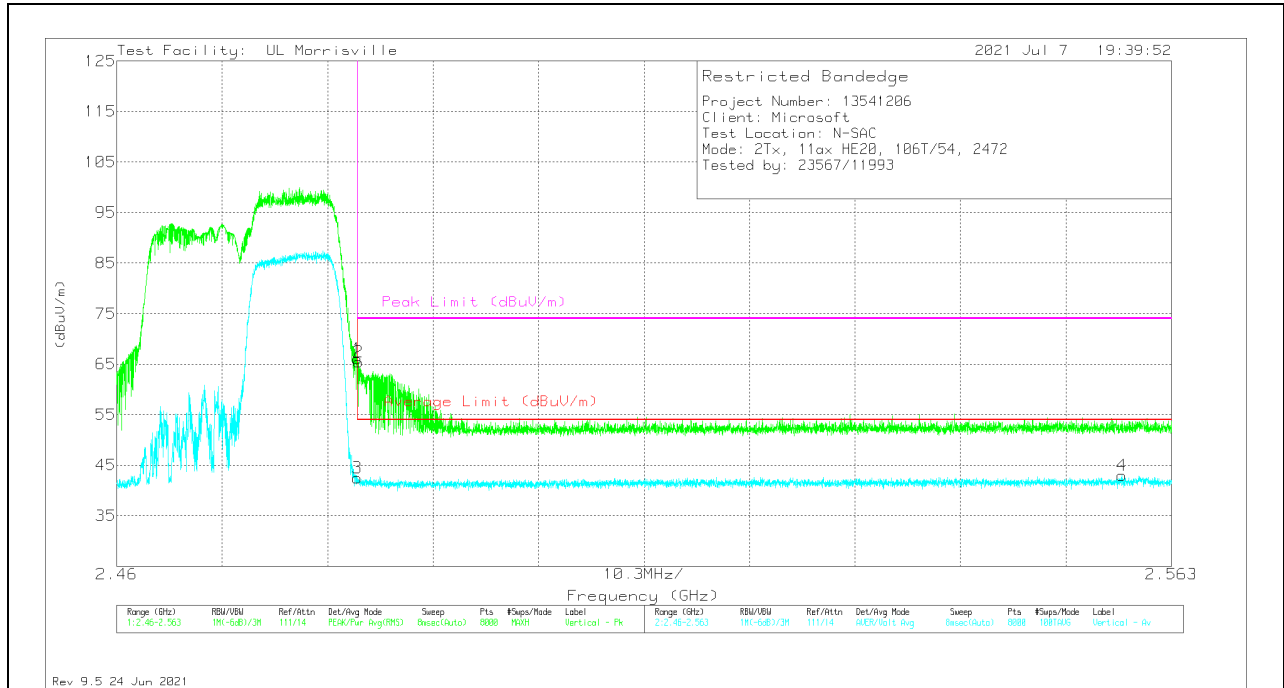


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	47.95	Pk	32.4	-24.3	10	66.05	-	-	74	-7.95	229	339	V
2	*** 2.48363	47.21	Pk	32.5	-24.3	10	65.41	-	-	74	-8.59	229	339	V
3	** 2.4835	24.33	ADV	32.4	-24.3	10	42.43	54	-11.57	-	-	229	339	V
4	** 2.55814	24.87	ADV	32.4	-24.3	10	42.97	54	-11.03	-	-	229	339	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 37

BANDEDGE (LOW CHANNEL 1)

HORIZONTAL RESULT

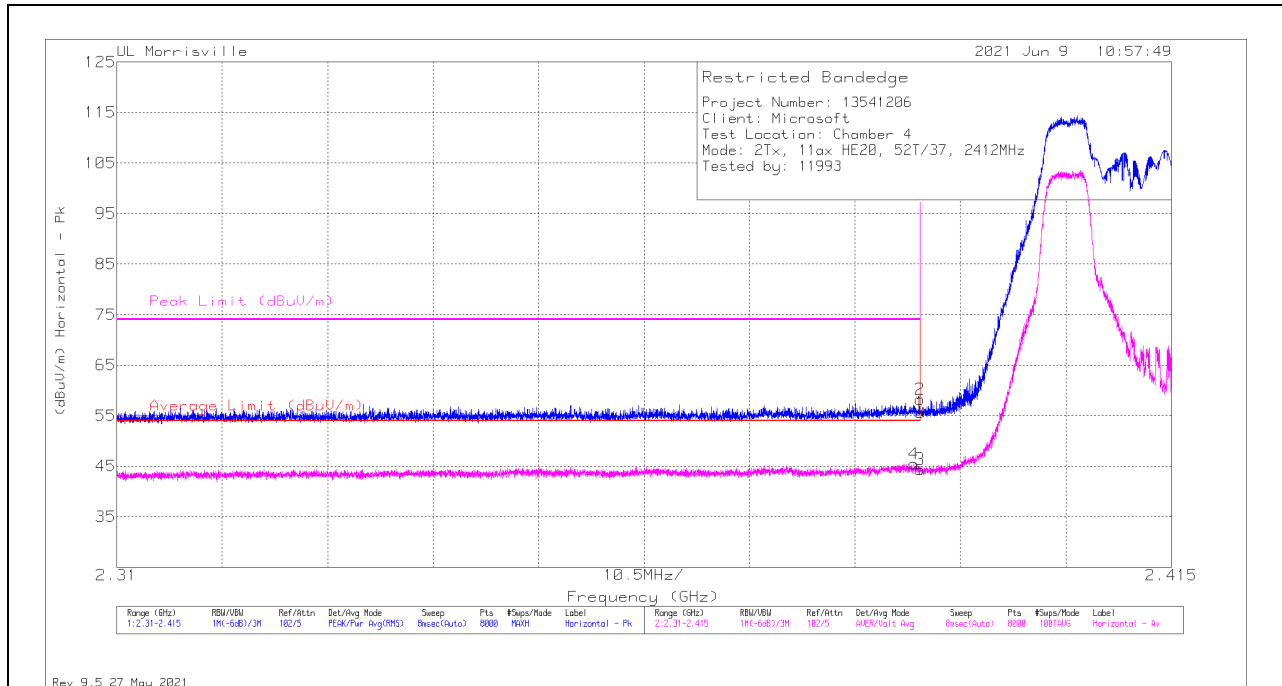

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	27.42	Pk	32	-13.8	10	55.62	-	-	74	-18.38	315	304	H
2	*** 2.38998	30	Pk	32	-13.8	10	58.2	-	-	74	-15.8	315	304	H
3	** 2.39	16.19	ADV	32	-13.8	10	44.39	54	-9.61	-	-	315	304	H
4	*** 2.38935	17.26	ADV	32	-13.8	10	45.46	54	-8.54	-	-	315	304	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

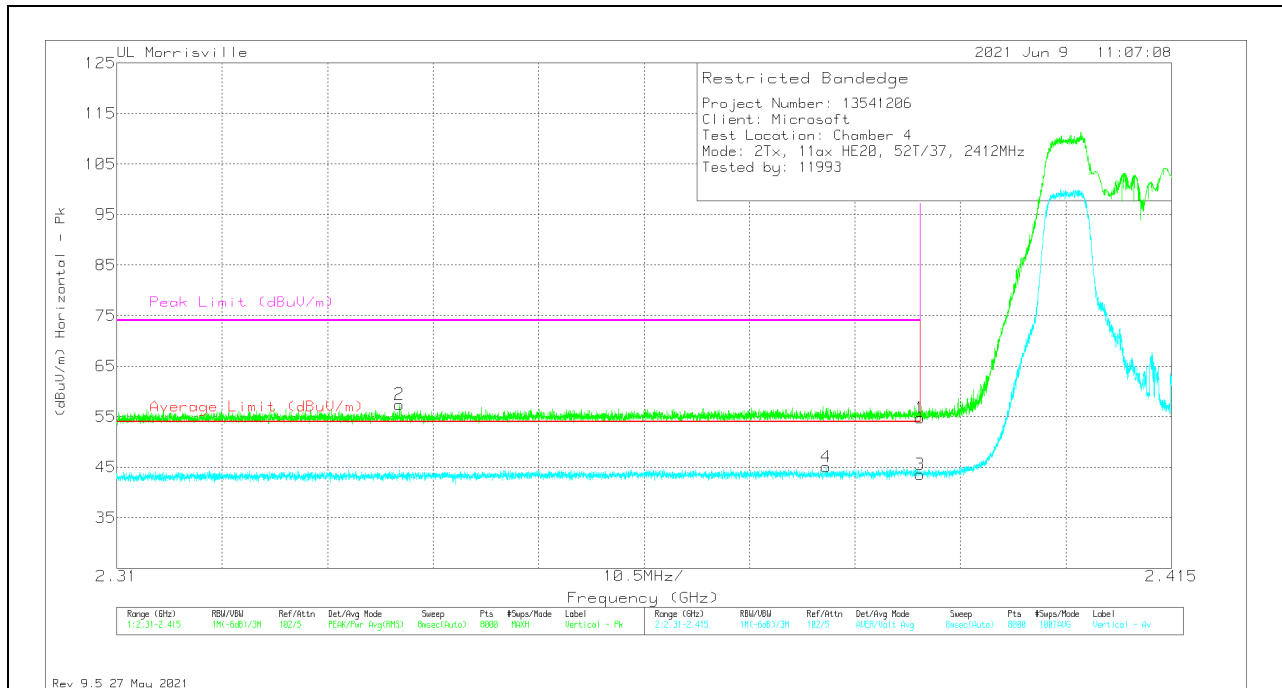


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	26.51	Pk	32	-13.8	10	54.71	-	-	74	-19.29	284	397	V
2	*** 2.33816	29.33	Pk	32	-13.9	10	57.43	-	-	74	-16.57	284	397	V
3	*** 2.39	15.42	ADV	32	-13.8	10	43.62	54	-10.38	-	-	284	397	V
4	*** 2.38065	16.96	ADV	32	-13.9	10	45.06	54	-8.94	-	-	284	397	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 40

BANDEDGE (HIGH CHANNEL 11)

HORIZONTAL RESULT

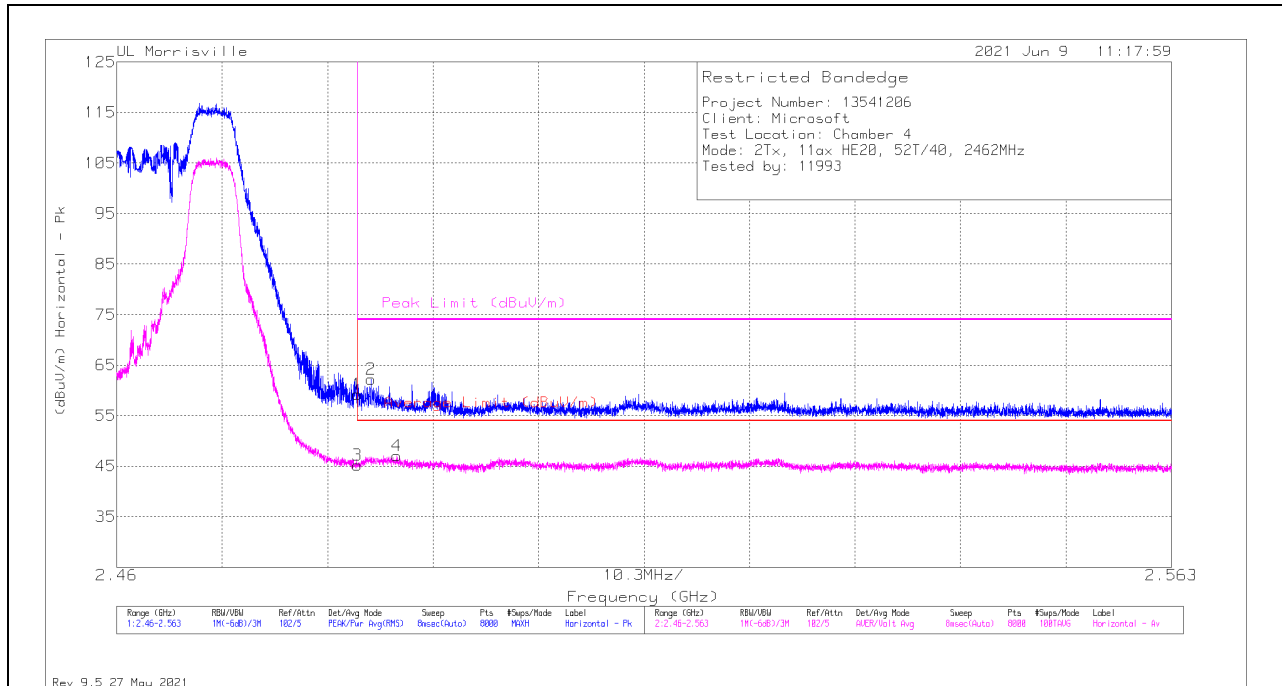

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	30.3	Pk	32.6	-13.7	10	59.2	-	-	74	-14.8	78	135	H
2	*** 2.48481	33.29	Pk	32.6	-13.7	10	62.19	-	-	74	-11.81	78	135	H
3	*** 2.4835	16.32	ADV	32.6	-13.7	10	45.22	54	-8.78	-	-	78	135	H
4	*** 2.48736	18.22	ADV	32.6	-13.7	10	47.12	54	-6.88	-	-	78	135	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

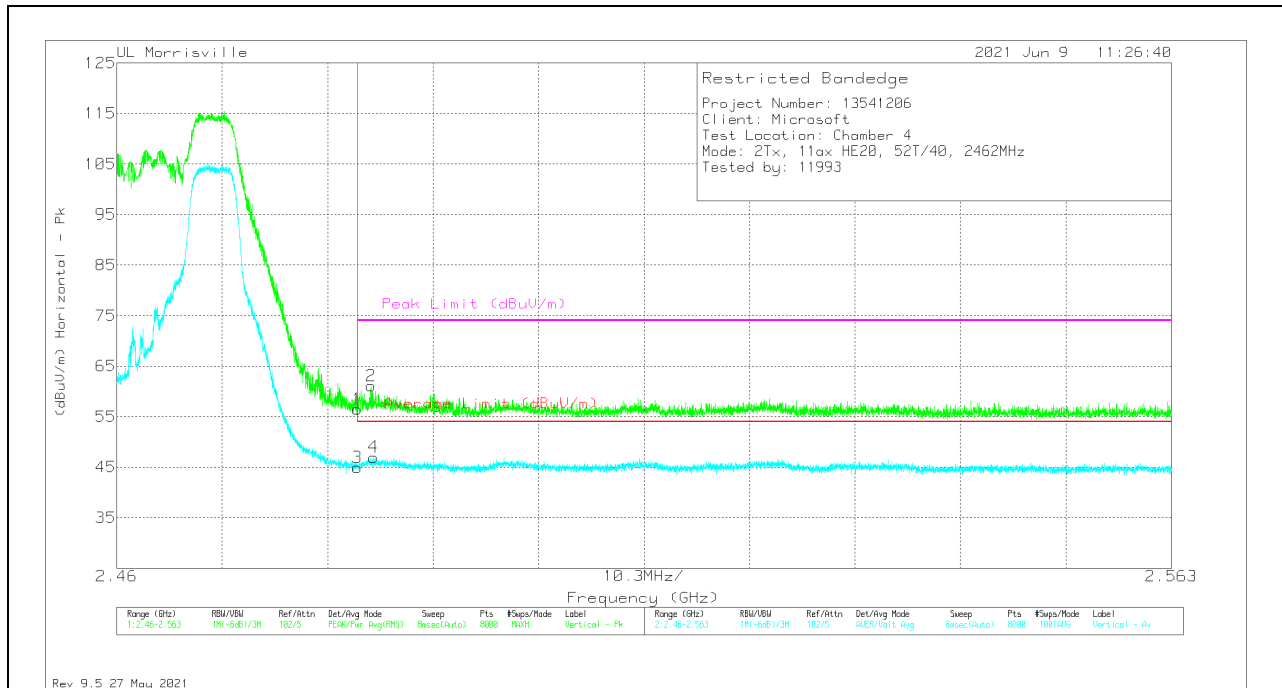


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	27.6	Pk	32.6	-13.7	10	56.5	-	-	74	-17.5	131	302	V
2	*** 2.48487	32.22	Pk	32.6	-13.7	10	61.12	-	-	74	-12.88	131	302	V
3	*** 2.4835	16.01	ADV	32.6	-13.7	10	44.91	54	-9.09	-	-	131	302	V
4	*** 2.48507	18.1	ADV	32.6	-13.7	10	47	54	-7	-	-	131	302	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANEDGE (HIGH CHANNEL 12)

HORIZONTAL RESULT

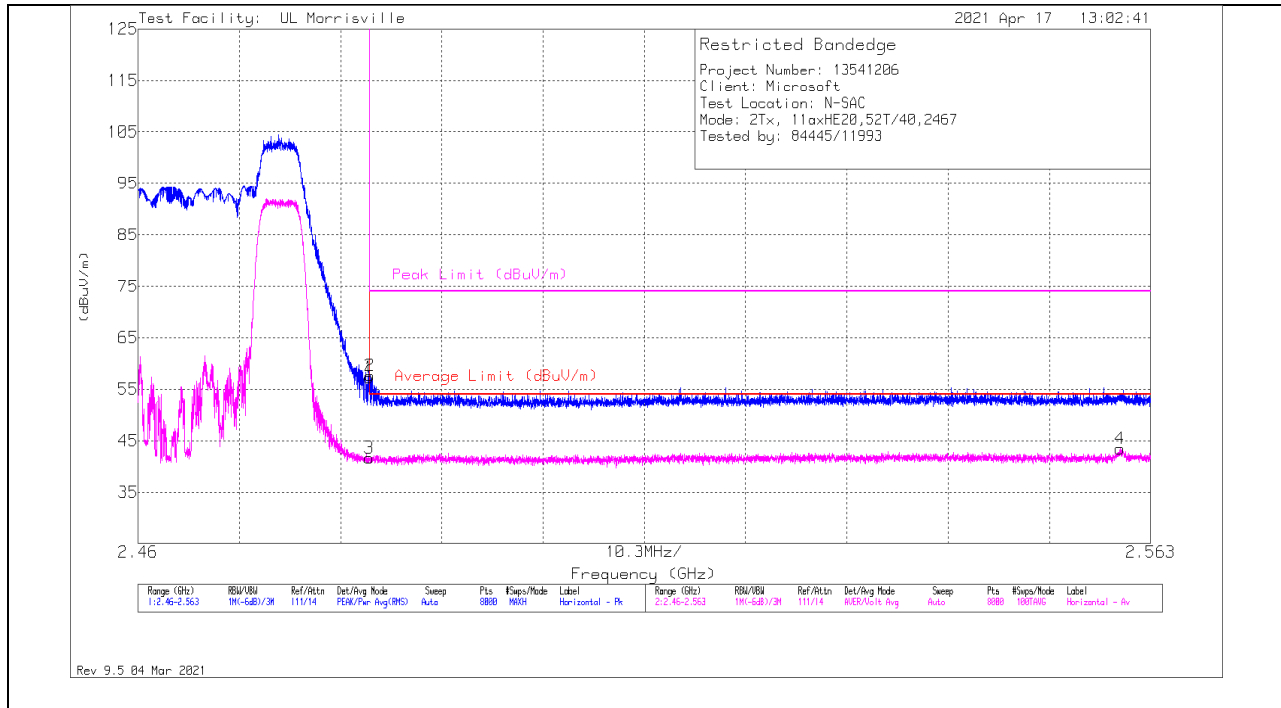

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	39.18	Pk	32.4	-24.3	10	57.28	-	-	74	-16.72	349	121	H
2	*** 2.48356	39.56	Pk	32.4	-24.3	10	57.66	-	-	74	-16.34	349	121	H
3	*** 2.4835	23.52	ADV	32.4	-24.3	10	41.62	54	-12.38	-	-	349	121	H
4	** 2.55989	25.48	ADV	32.3	-24.3	10	43.48	54	-10.52	-	-	349	121	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

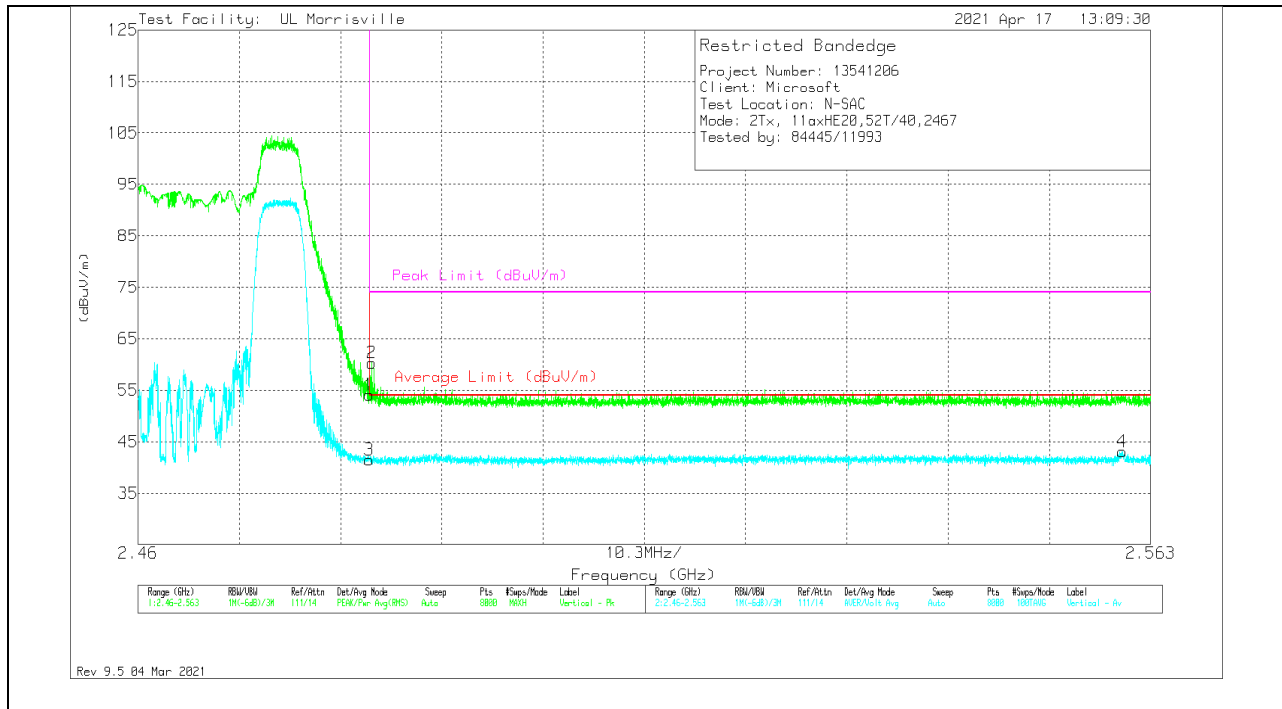

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	36.05	Pk	32.4	-24.3	10	54.15	-	-	74	-19.85	74	257	V
2	* ** 2.48376	42.26	Pk	32.4	-24.3	10	60.36	-	-	74	-13.64	74	257	V
3	* ** 2.4835	23.36	ADV	32.4	-24.3	10	41.46	54	-12.54	-	-	74	257	V
4	** 2.56011	25.06	ADV	32.3	-24.3	10	43.06	54	-10.94	-	-	74	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 13)

HORIZONTAL RESULT

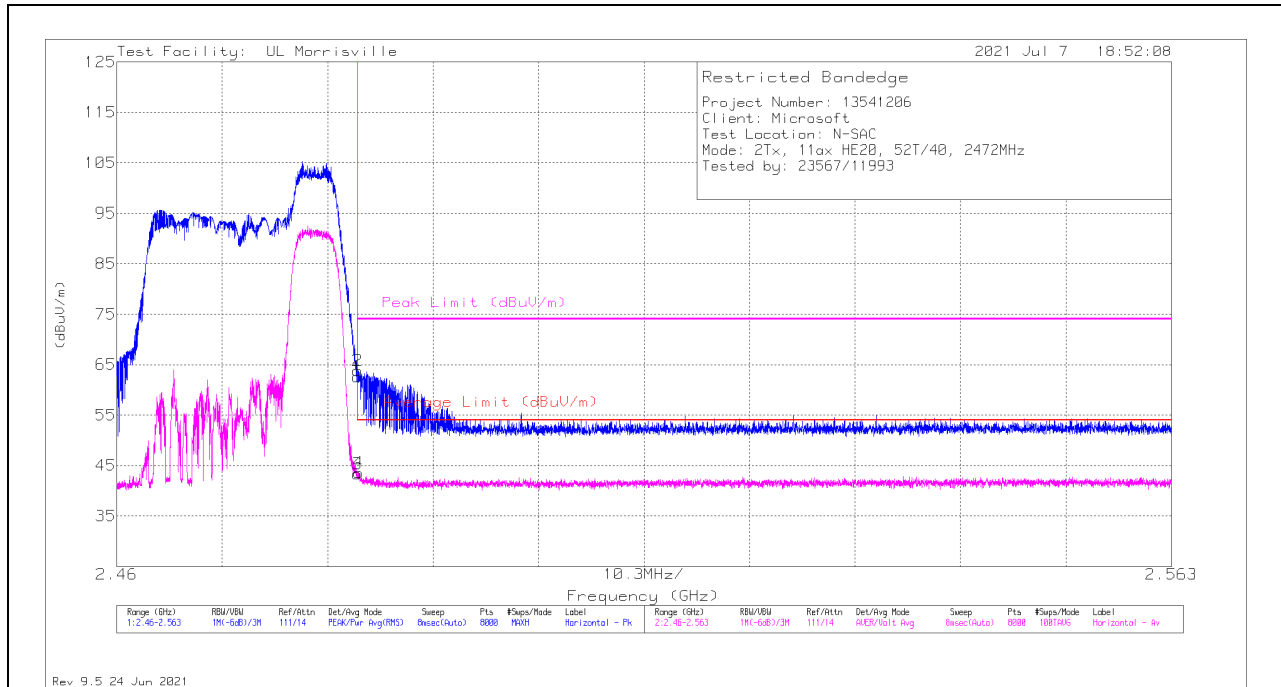

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	44.45	PK	32.4	-24.3	10	62.55	-	-	74	-11.45	34	116	H
2	** 2.48353	45.73	PK	32.4	-24.3	10	63.83	-	-	74	-10.17	34	116	H
3	*** 2.4835	25.29	ADV	32.4	-24.3	10	43.39	54	-10.61	-	-	34	116	H
4	*** 2.4836	25.53	ADV	32.4	-24.3	10	43.63	54	-10.37	-	-	34	116	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

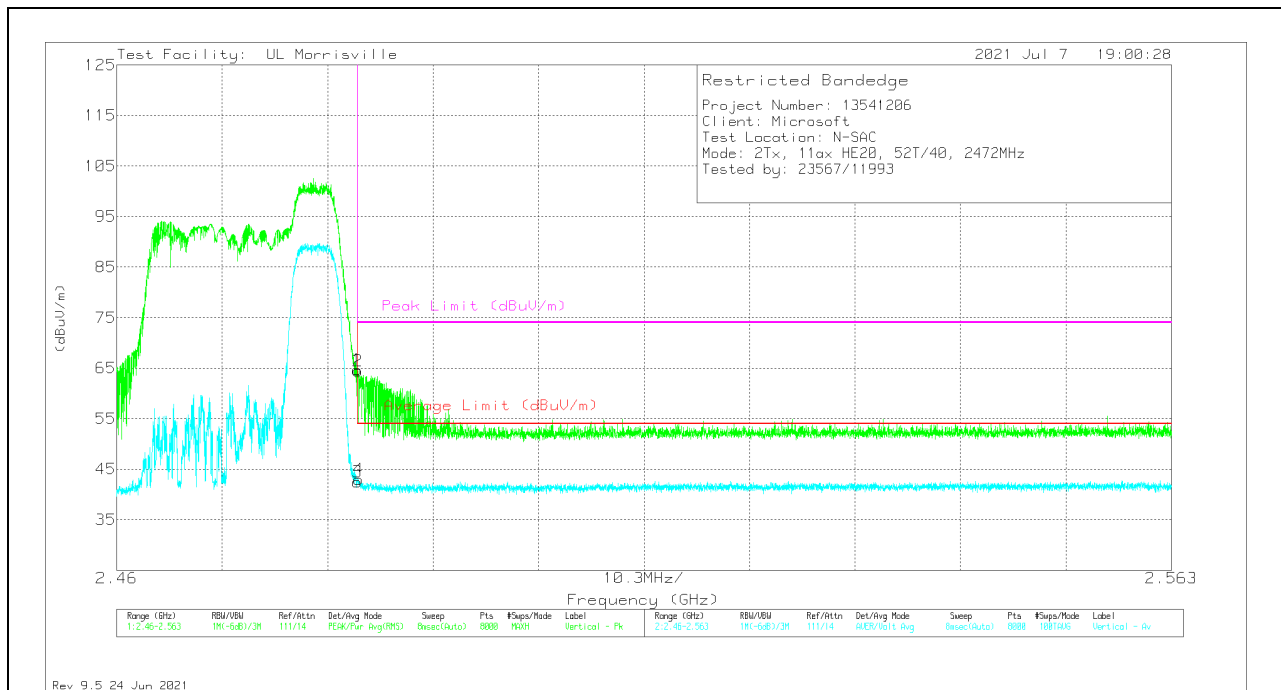


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	46.61	Pk	32.4	-24.3	10	64.71	-	-	74	-9.29	233	268	V
2	*** 2.48358	46.39	Pk	32.4	-24.3	10	64.49	-	-	74	-9.51	233	268	V
3	*** 2.4835	24.36	ADV	32.4	-24.3	10	42.46	54	-11.54	-	-	233	268	V
4	*** 2.48363	24.81	ADV	32.5	-24.3	10	43.01	54	-10.99	-	-	233	268	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL 1)


HORIZONTAL RESULT

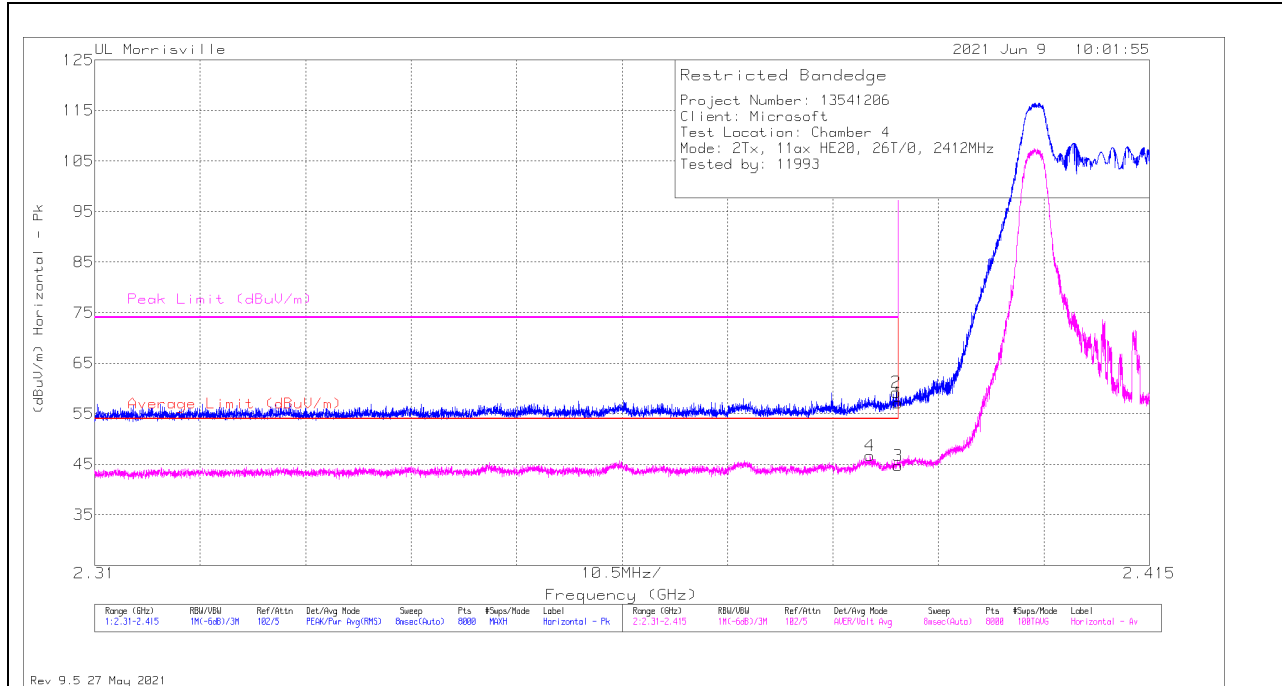

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	28.92	Pk	32	-13.8	10	57.12	-	-	74	-16.88	86	111	H
2	*** 2.38979	31.03	Pk	32	-13.8	10	59.23	-	-	74	-14.77	86	111	H
3	** 2.39	16.53	ADV	32	-13.8	10	44.73	54	-9.27	-	-	86	111	H
4	*** 2.3872	18.45	ADV	32	-13.8	10	46.65	54	-7.35	-	-	86	111	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

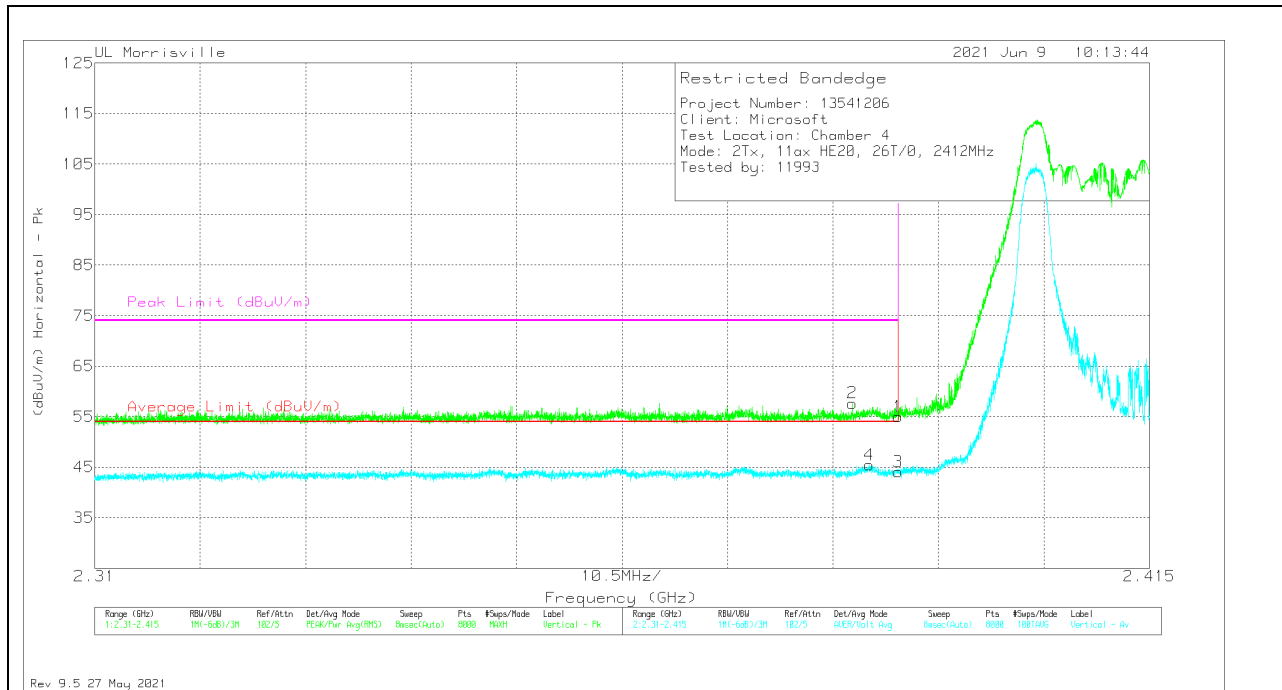

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	26.76	Pk	32	-13.8	10	54.96	-	-	74	-19.04	285	331	V
2	* ** 2.38541	29.48	Pk	32	-13.8	10	57.68	-	-	74	-16.32	285	331	V
3	* ** 2.39	15.86	ADV	32	-13.8	10	44.06	54	-9.94	-	-	285	331	V
4	* ** 2.38708	17.28	ADV	32	-13.8	10	45.48	54	-8.52	-	-	285	331	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL 11)

HORIZONTAL RESULT

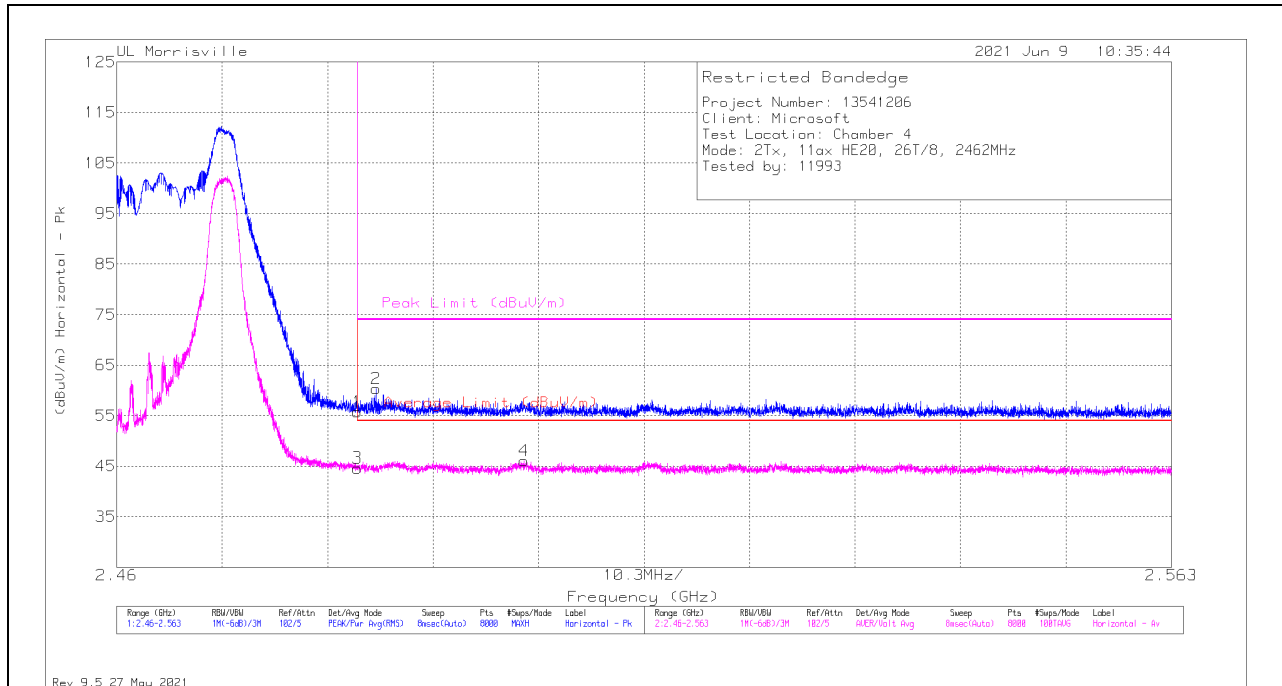

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 2.4835	26.81	Pk	32.6	-13.7	10	55.71	-	-	74	-18.29	0	336	H
2	** * 2.48532	31.44	Pk	32.6	-13.7	10	60.34	-	-	74	-13.66	0	336	H
3	** * 2.4835	15.74	ADV	32.6	-13.7	10	44.64	54	-9.36	-	-	0	336	H
4	** * 2.49979	17.16	ADV	32.6	-13.7	10	46.06	54	-7.94	-	-	0	336	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

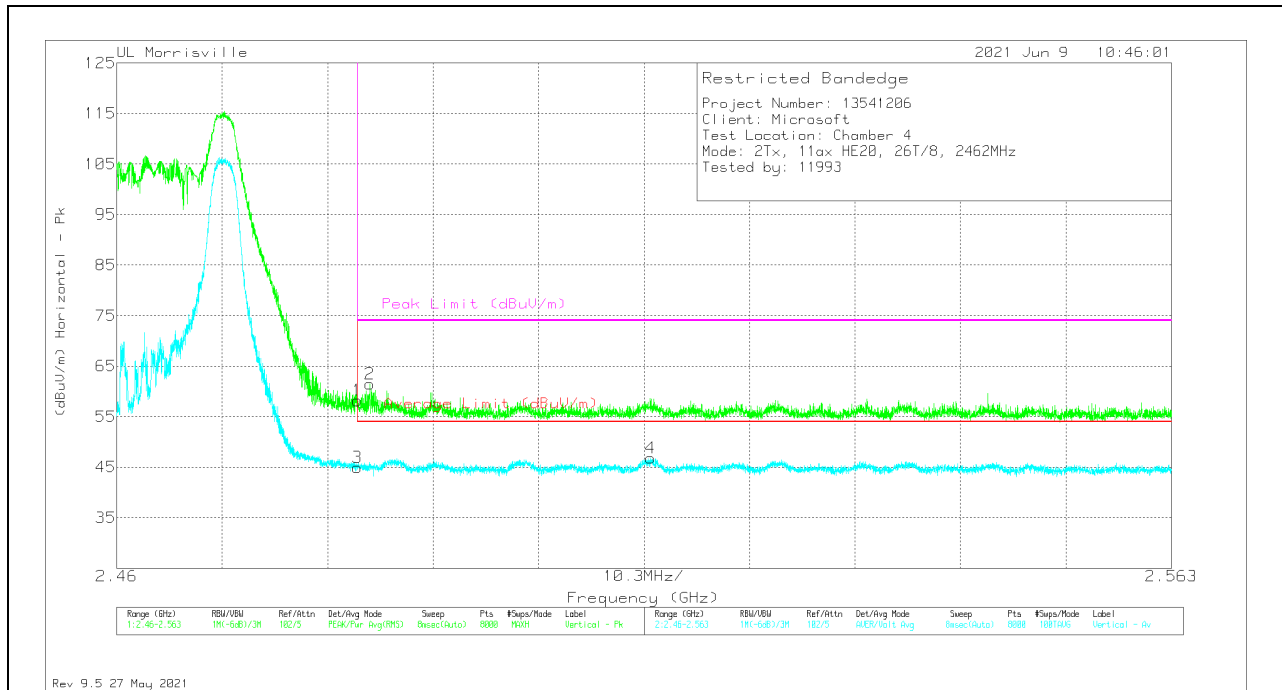


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	29.28	Pk	32.6	-13.7	10	58.18	-	-	74	-15.82	287	220	V
2	*** 2.48471	32.54	Pk	32.6	-13.7	10	61.44	-	-	74	-12.56	287	220	V
3	*** 2.4835	16.01	ADV	32.6	-13.7	10	44.91	54	-9.09	-	-	287	220	V
4	** 2.51216	17.93	ADV	32.5	-13.6	10	46.83	54	-7.17	-	-	287	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANEDGE (HIGH CHANNEL 12)

HORIZONTAL RESULT

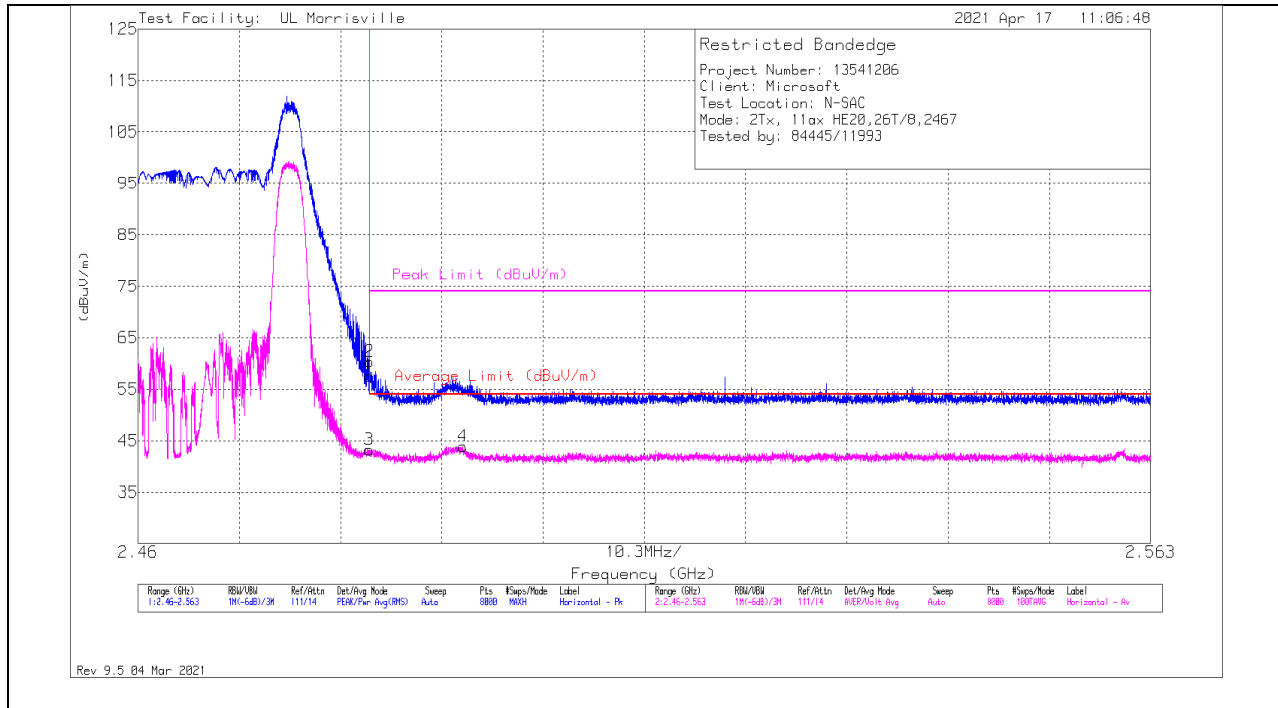

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	39.49	Pk	32.4	-24.3	10	57.59	-	-	74	-16.41	30	149	H
2	*** 2.48353	42.27	Pk	32.4	-24.3	10	60.37	-	-	74	-13.63	30	149	H
3	*** 2.4835	25.15	ADV	32.4	-24.3	10	43.25	54	-10.75	-	-	30	149	H
4	*** 2.49303	25.7	ADV	32.5	-24.3	10	43.9	54	-10.1	-	-	30	149	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

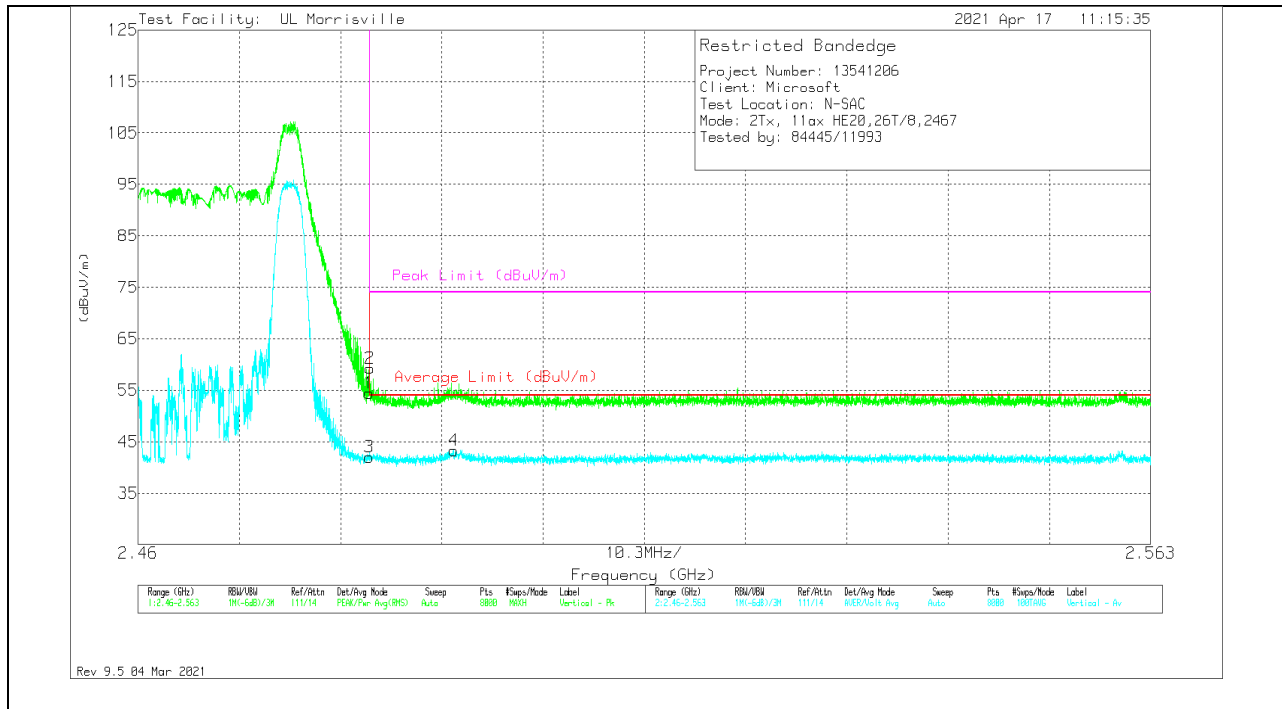

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	36.36	Pk	32.4	-24.3	10	54.46	-	-	74	-19.54	48	262	V
2	* ** 2.48355	41.15	Pk	32.4	-24.3	10	59.25	-	-	74	-14.75	48	262	V
3	* ** 2.4835	23.91	ADV	32.4	-24.3	10	42.01	54	-11.99	-	-	48	262	V
4	* ** 2.49212	25.13	ADV	32.5	-24.3	10	43.33	54	-10.67	-	-	48	262	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 13)


HORIZONTAL RESULT

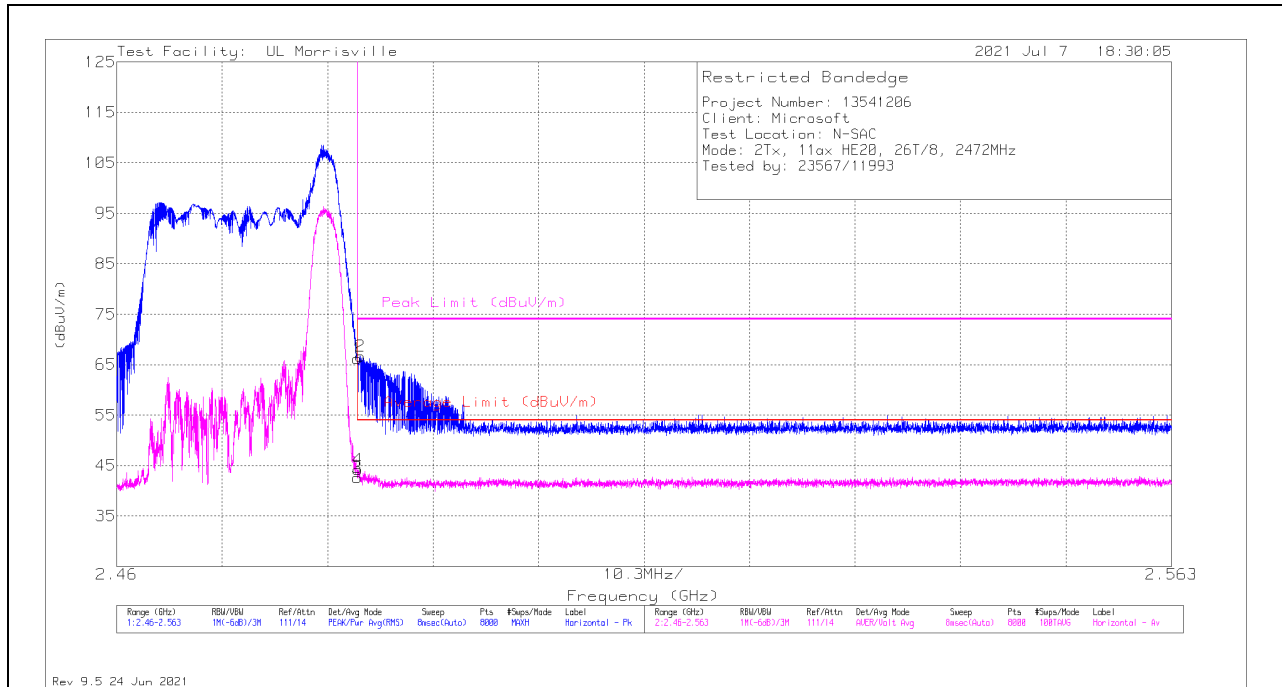

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	48.05	PK	32.4	-24.3	10	66.15	-	-	74	-7.85	22	163	H
2	*** 2.48381	48.43	Pk	32.5	-24.3	10	66.63	-	-	74	-7.37	22	163	H
3	*** 2.4835	24.52	ADV	32.4	-24.3	10	42.62	54	-11.38	-	-	22	163	H
4	*** 2.48354	26.07	ADV	32.4	-24.3	10	44.17	54	-9.83	-	-	22	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

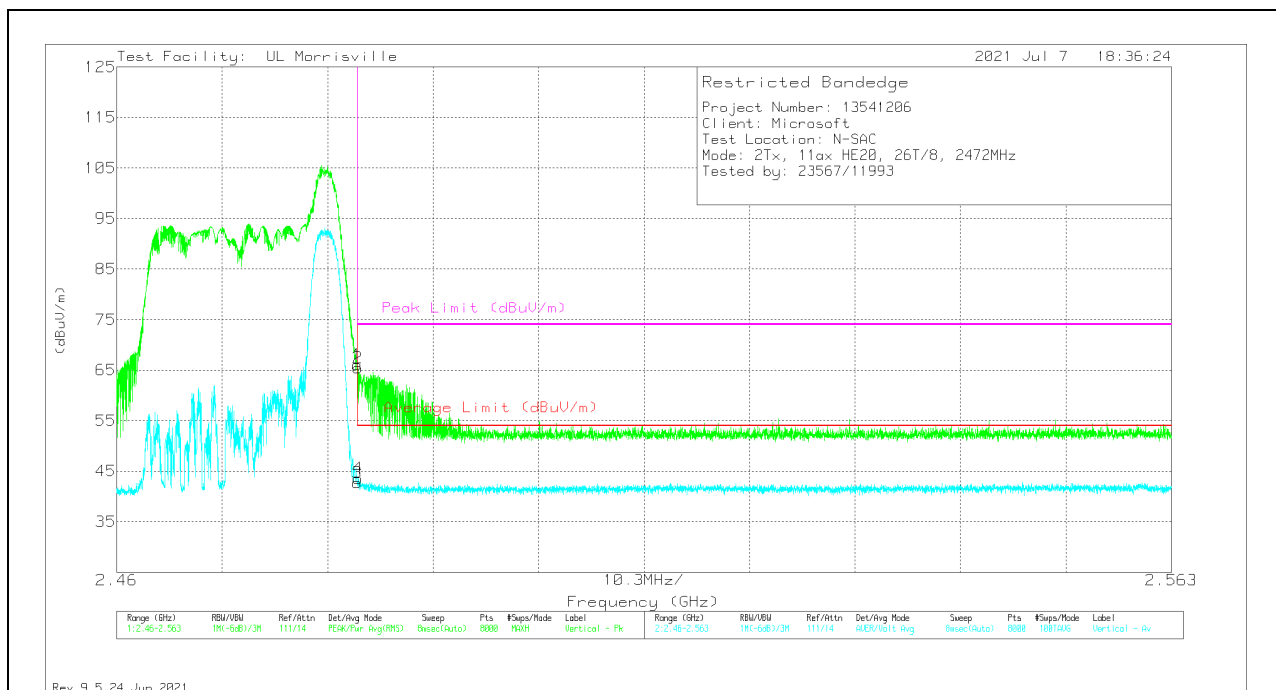

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	47.98	Pk	32.4	-24.3	10	66.08	-	-	74	-7.92	220	276	V
2	*** 2.48356	47.33	Pk	32.4	-24.3	10	65.43	-	-	74	-8.57	220	276	V
3	*** 2.4835	24.58	ADV	32.4	-24.3	10	42.68	54	-11.32	-	-	220	275	V
4	*** 2.48354	25.49	ADV	32.4	-24.3	10	43.59	54	-10.41	-	-	220	275	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

10.1.2. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 2.4GHz BAND


1TX Antenna A MODE: 52-Tones, RU Index 40

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL 3 RESULTS

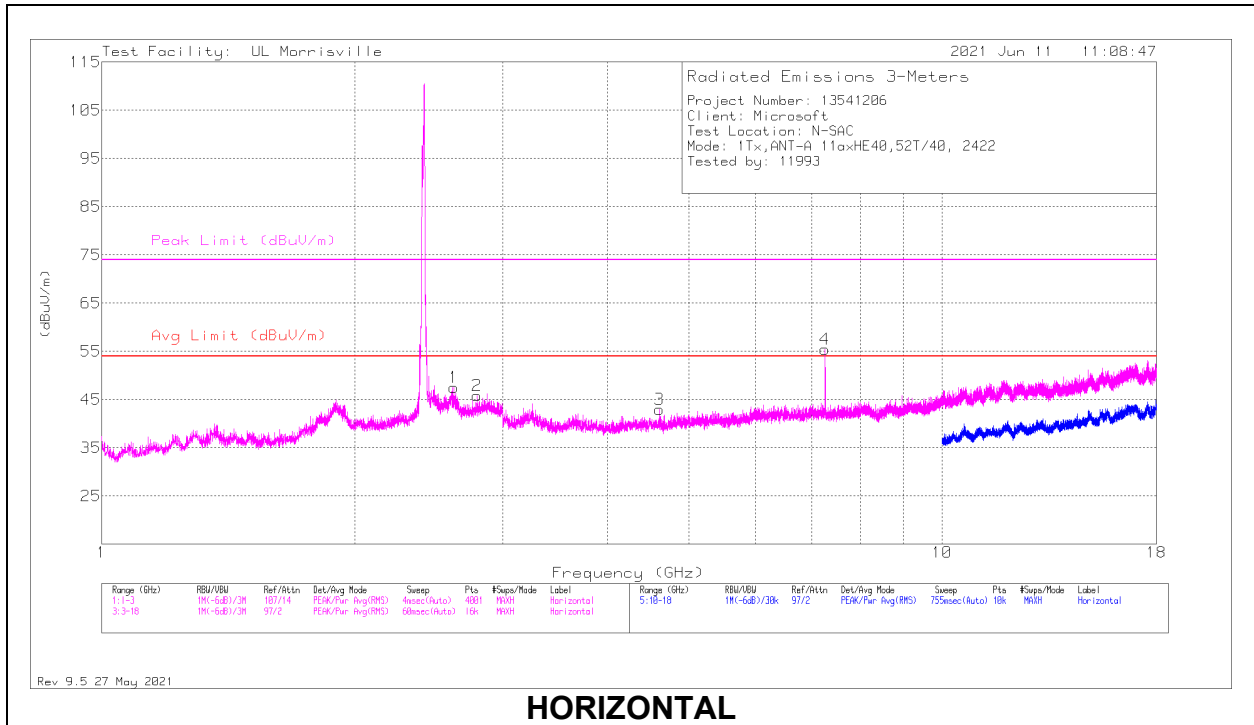

HORIZONTAL

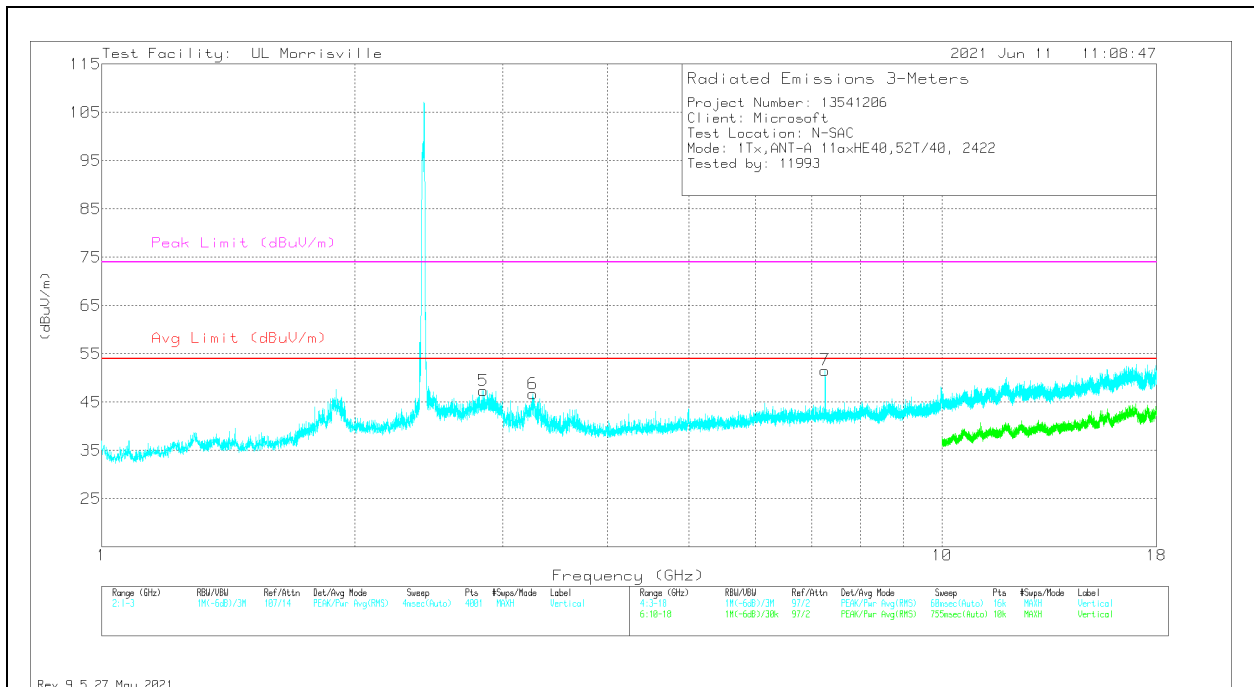

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 2.6255	39.17	Pk	32.4	-24.1	0	47.47	54	-6.53	74	-26.53	0-360	101	H
2	*** 2.7955	36.98	Pk	32.7	-23.8	0	45.88	54	-8.12	74	-28.12	0-360	101	H
5	*** 2.844	38.54	Pk	32.4	-23.6	0	47.34	54	-6.66	74	-26.66	0-360	200	V
3	*** 4.61438	41.36	Pk	34	-32.4	0	42.96	54	-11.04	74	-31.04	0-360	101	H
4	*** 7.25808	54.98	PK2	35.7	-29.4	0	61.28	-	-	74	-12.72	252	117	H
	*** 7.25907	40.66	ADV	35.7	-29.4	.31	47.27	54	-6.73	-	-	252	117	H
6	*** 3.26156	46.56	Pk	32.9	-32.7	0	46.76	54	-7.24	74	-27.24	0-360	200	V
7	*** 7.25516	53.54	PK2	35.7	-29.5	0	59.74	-	-	74	-14.26	341	258	V
	*** 7.25692	36.93	ADV	35.7	-29.4	.31	43.54	54	-10.46	-	-	341	258	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL 6 RESULTS

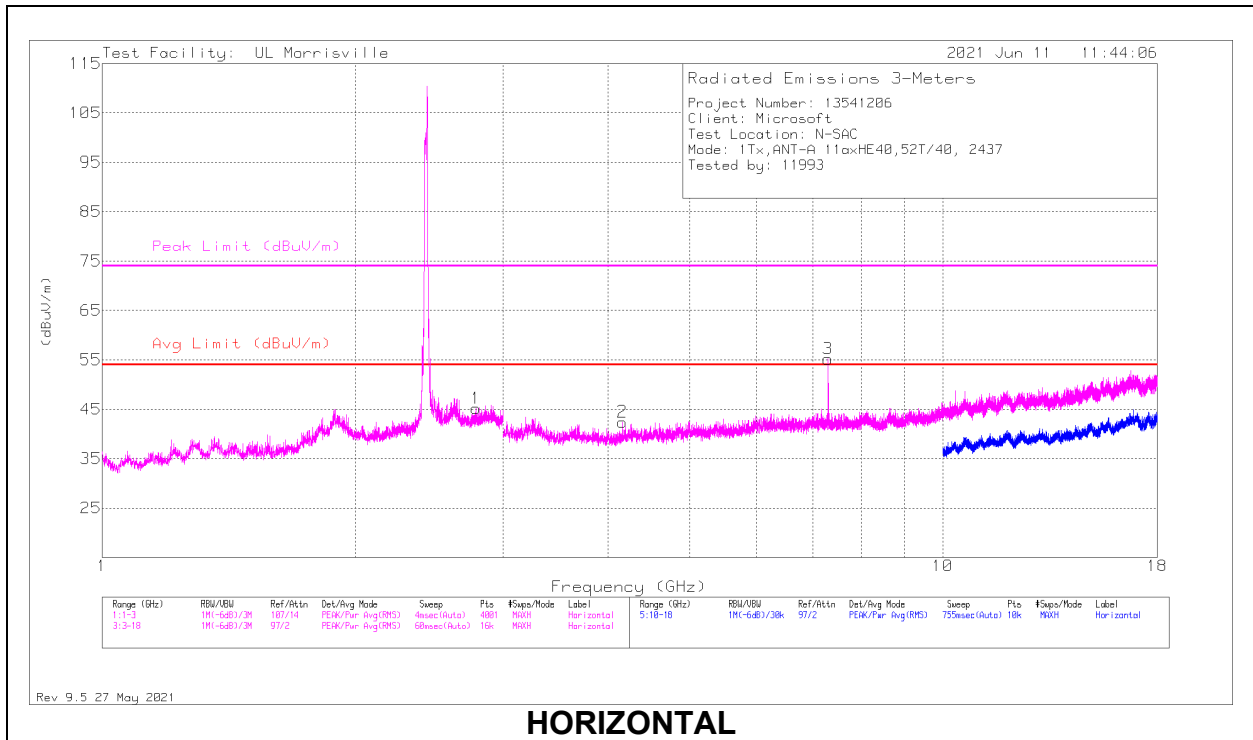

HORIZONTAL

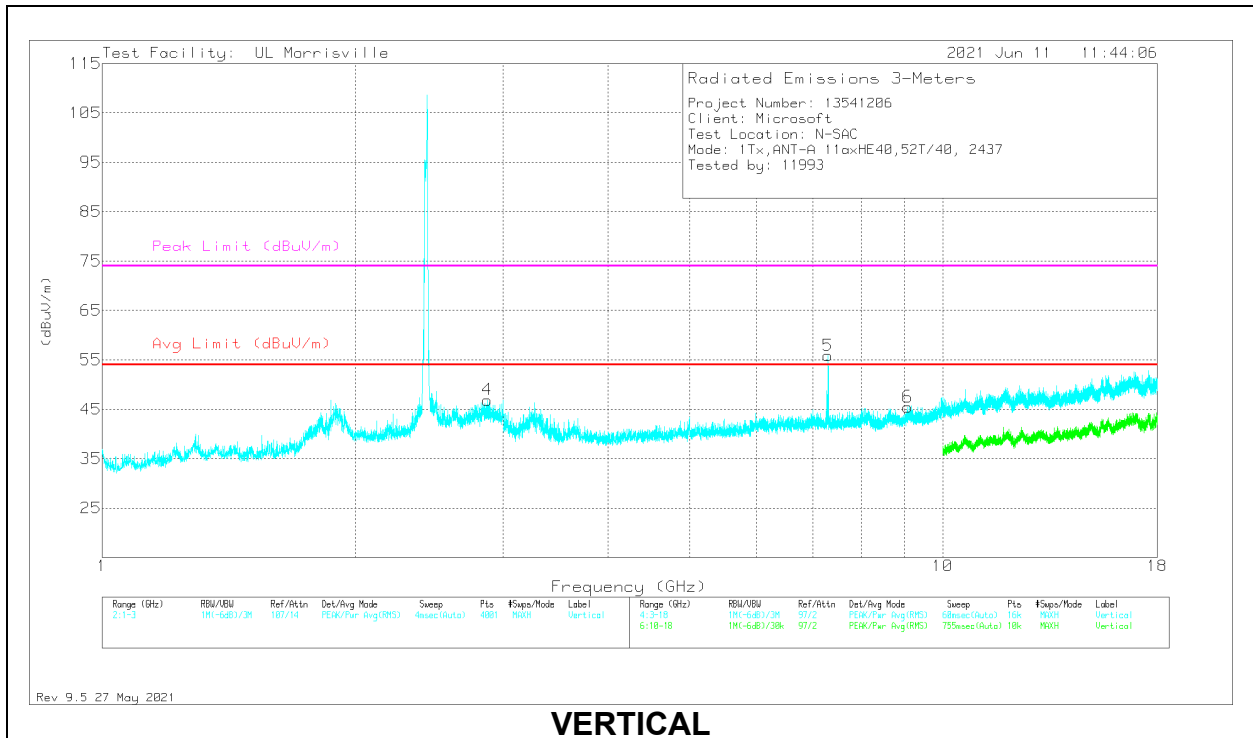

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.7835	36.25	Pk	32.7	-23.8	0	45.15	54	-8.85	74	-28.85	0-360	199	H
4	*** 2.871	38	Pk	32.5	-23.6	0	46.9	54	-7.1	74	-27.1	0-360	200	V
2	** 4.15688	41.01	Pk	33.6	-32.2	0	42.41	54	-11.59	74	-31.59	0-360	199	H
3	** 7.30283	54.19	PK2	35.6	-29.2	0	60.59	-	-	74	-13.41	271	104	H
	** 7.30436	41.49	ADV	35.6	-29.3	.31	48.1	54	-5.9	-	-	271	104	H
5	** 7.30013	56.8	PK2	35.6	-29.2	0	63.2	-	-	74	-10.8	319	252	V
	** 7.30218	41.59	ADV	35.6	-29.2	.31	48.3	54	-5.7	-	-	319	252	V
6	** 9.09	37.36	Pk	36.2	-28.1	0	45.46	54	-8.54	74	-28.54	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL 11 RESULTS

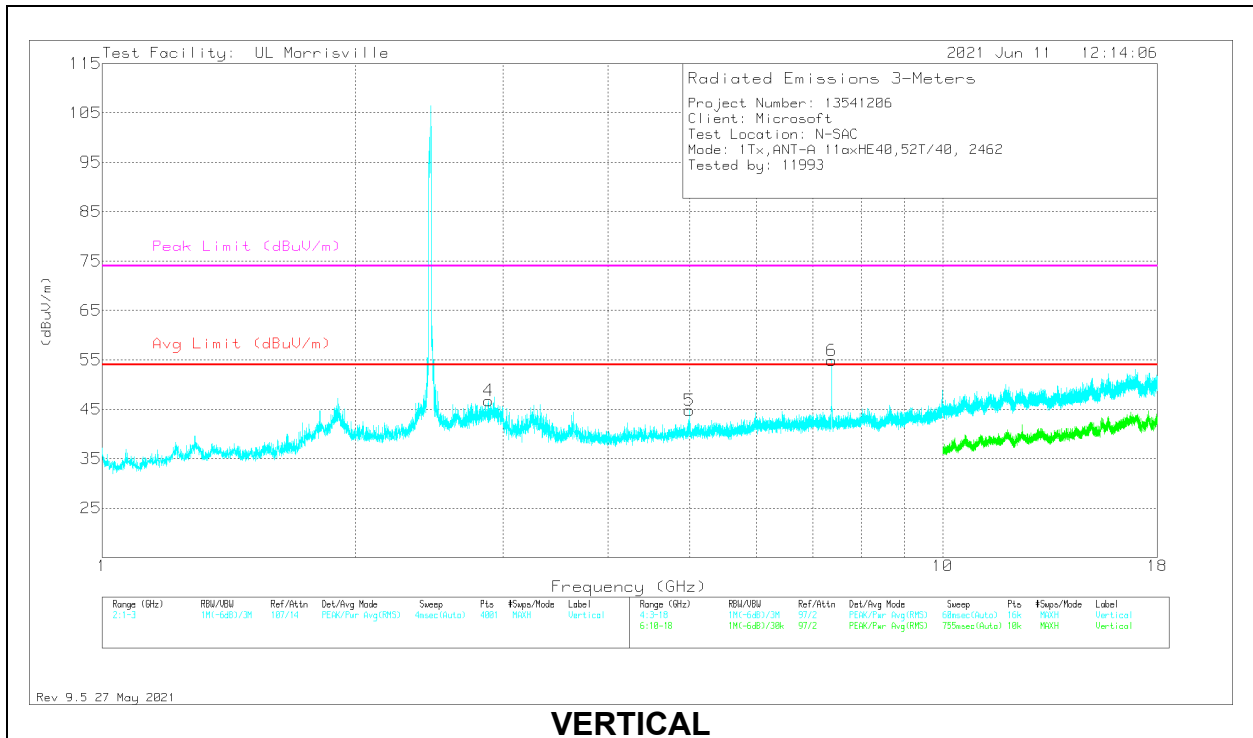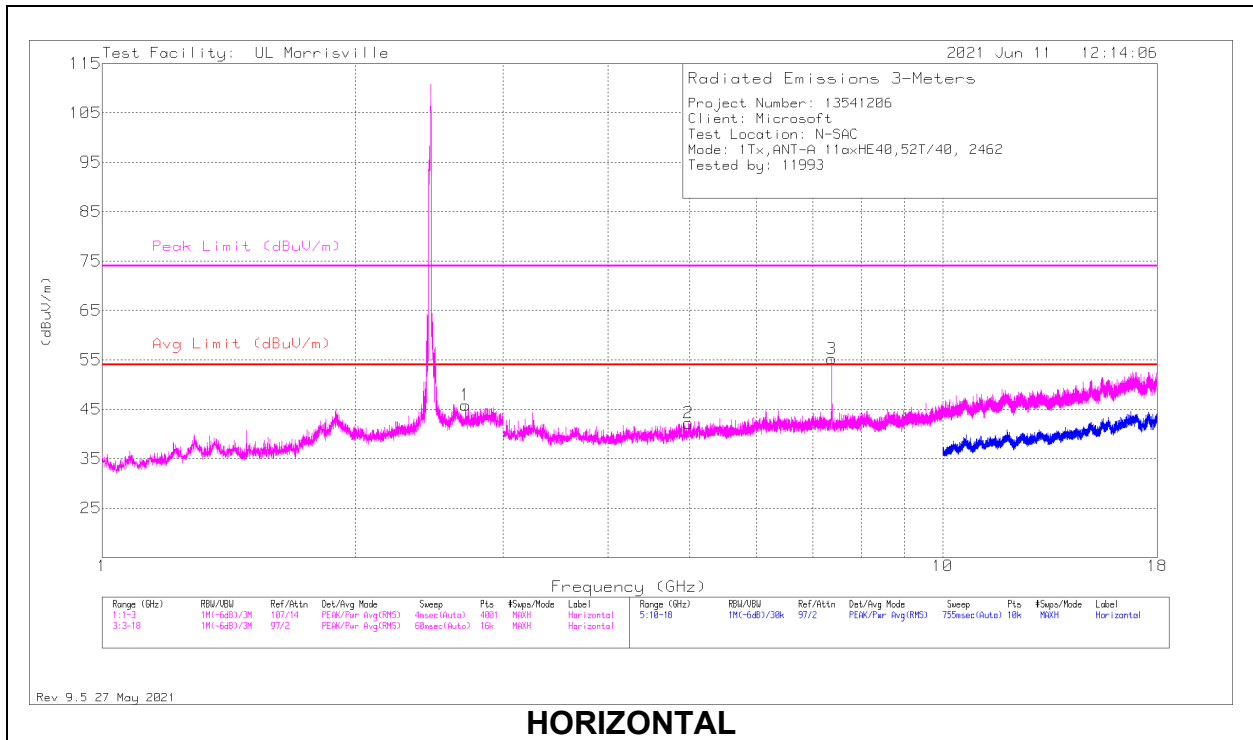

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.706	37.23	Pk	32.5	-23.9	0	45.83	54	-8.17	74	-28.17	0-360	101	H
4	*** 2.8805	37.63	Pk	32.6	-23.5	0	46.73	54	-7.27	74	-27.27	0-360	200	V
2	*** 4.98375	40.5	Pk	34.3	-32.6	0	42.2	54	-11.8	74	-31.8	0-360	101	H
3	*** 7.37506	53.11	PK2	35.6	-29.3	0	59.41	-	-	74	-14.59	274	104	H
	*** 7.37805	36.05	ADV	35.6	-29.3	.31	42.66	54	-11.34	-	-	274	104	H
5	*** 4.99594	42.98	Pk	34.4	-32.6	0	44.78	54	-9.22	74	-29.22	0-360	101	V
6	*** 7.37559	51.71	PK2	35.6	-29.3	0	58.01	-	-	74	-15.99	345	143	V
	*** 7.37708	35.21	ADV	35.6	-29.3	.31	41.82	54	-12.18	-	-	345	143	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector



PK2 - Maximum Peak

ADV - Linear Voltage Average

1TX Antenna B MODE: 52-Tones, RU Index 40

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL 3 RESULTS

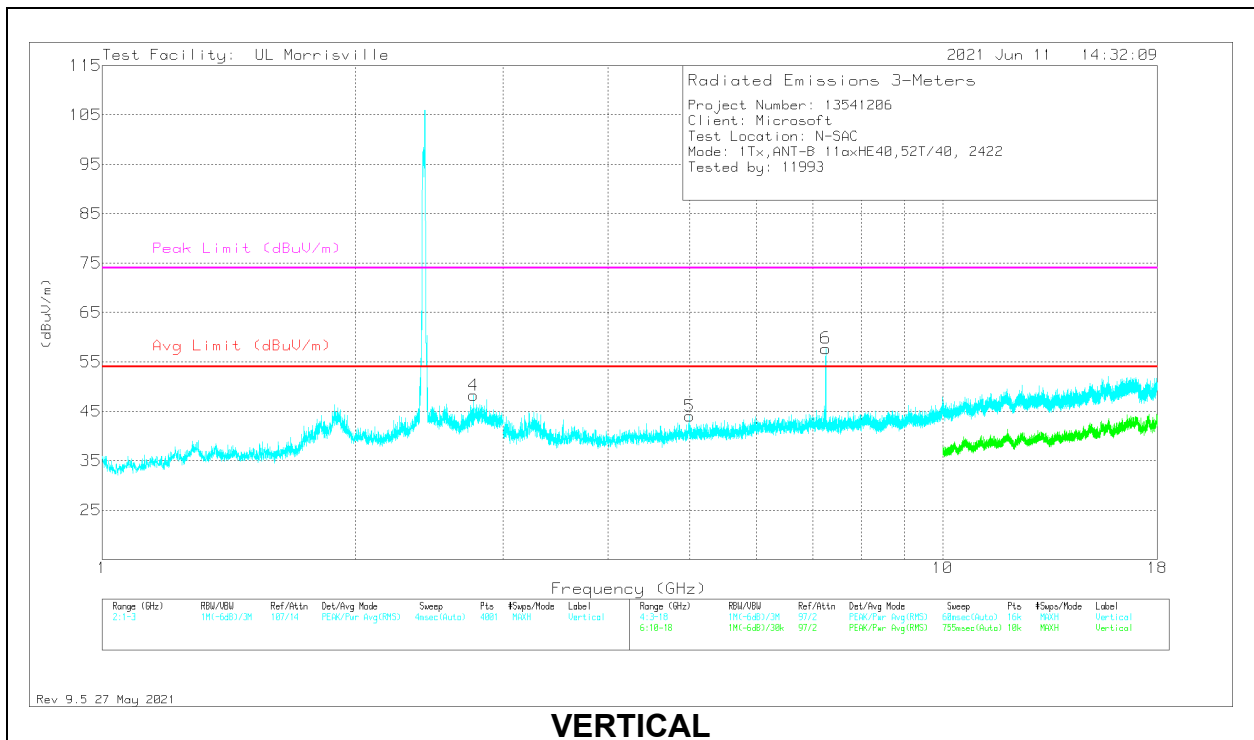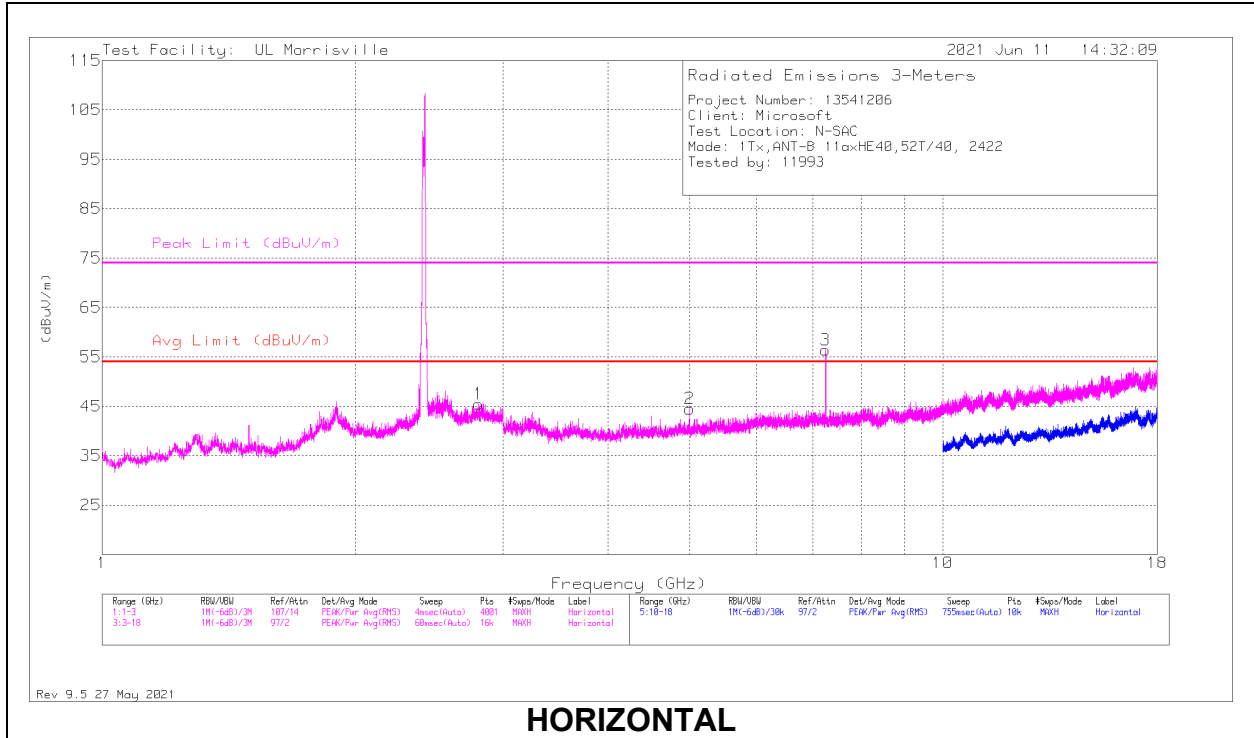

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.8045	36.65	Pk	32.6	-23.8	0	45.45	54	-8.55	74	-28.55	0-360	99	H
4	*** 2.76733	40.79	PK2	32.6	-23.8	0	49.59	-	-	74	-24.41	39	222	V
	*** 2.7684	28.22	ADV	32.6	-23.8	.31	37.33	54	-16.67	-	-	39	222	V
2	*** 4.99781	42.7	Pk	34.4	-32.6	0	44.5	54	-9.5	74	-29.5	0-360	101	H
3	*** 7.25838	54.64	PK2	35.7	-29.4	0	60.94	-	-	74	-13.06	268	194	H
	*** 7.2588	41.52	ADV	35.7	-29.4	.31	48.13	54	-5.87	-	-	268	194	H
5	*** 4.99781	42.22	Pk	34.4	-32.6	0	44.02	54	-9.98	74	-29.98	0-360	101	V
6	*** 7.25911	56.02	PK2	35.7	-29.4	0	62.32	-	-	74	-11.68	350	153	V
	*** 7.25891	43.02	ADV	35.7	-29.4	.31	49.63	54	-4.37	-	-	350	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL 6 RESULTS

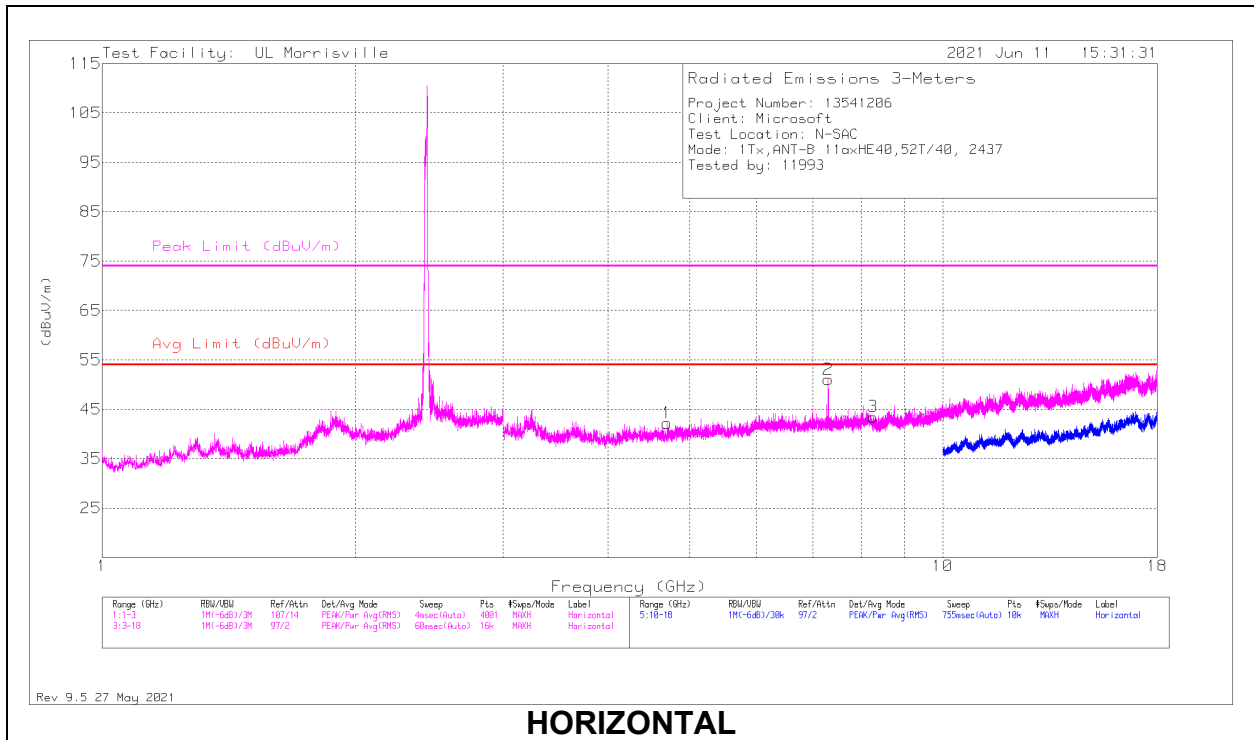

HORIZONTAL

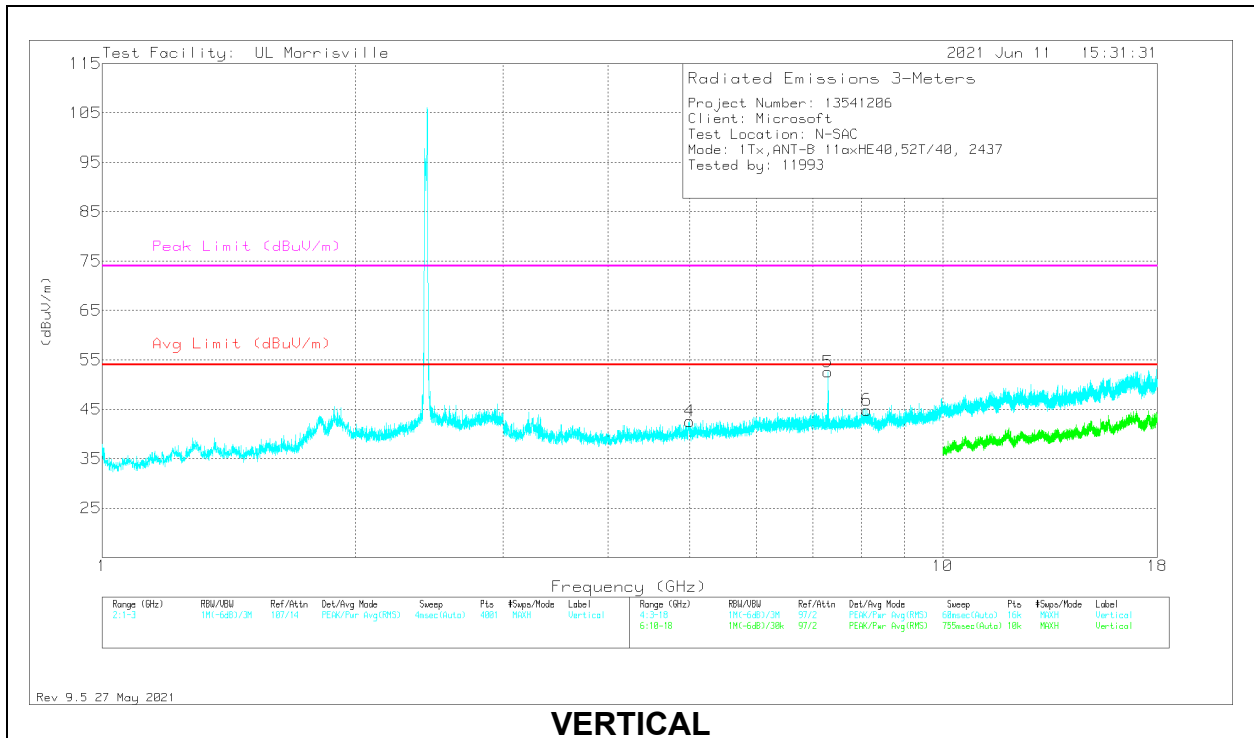

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.69875	40.6	Pk	33.8	-32.2	0	42.2	54	-11.8	74	-31.8	0-360	101	H
2	*** 7.30547	49.99	PK2	35.6	-29.3	0	56.29	-	-	74	-17.71	251	128	H
	*** 7.30364	36.94	ADV	35.6	-29.3	.31	43.55	54	-10.45	-	-	251	128	H
3	*** 8.26688	36.76	Pk	35.9	-29.2	0	43.46	54	-10.54	74	-30.54	0-360	101	H
4	*** 4.99875	40.78	Pk	34.4	-32.6	0	42.58	54	-11.42	74	-31.42	0-360	101	V
5	*** 7.29953	49.81	PK2	35.6	-29.2	0	56.21	-	-	74	-17.79	324	259	V
	*** 7.30173	34.04	ADV	35.6	-29.2	.31	40.75	54	-13.25	-	-	324	259	V
6	*** 8.12344	37.83	Pk	35.9	-28.9	0	44.83	54	-9.17	74	-29.17	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL 11 RESULTS

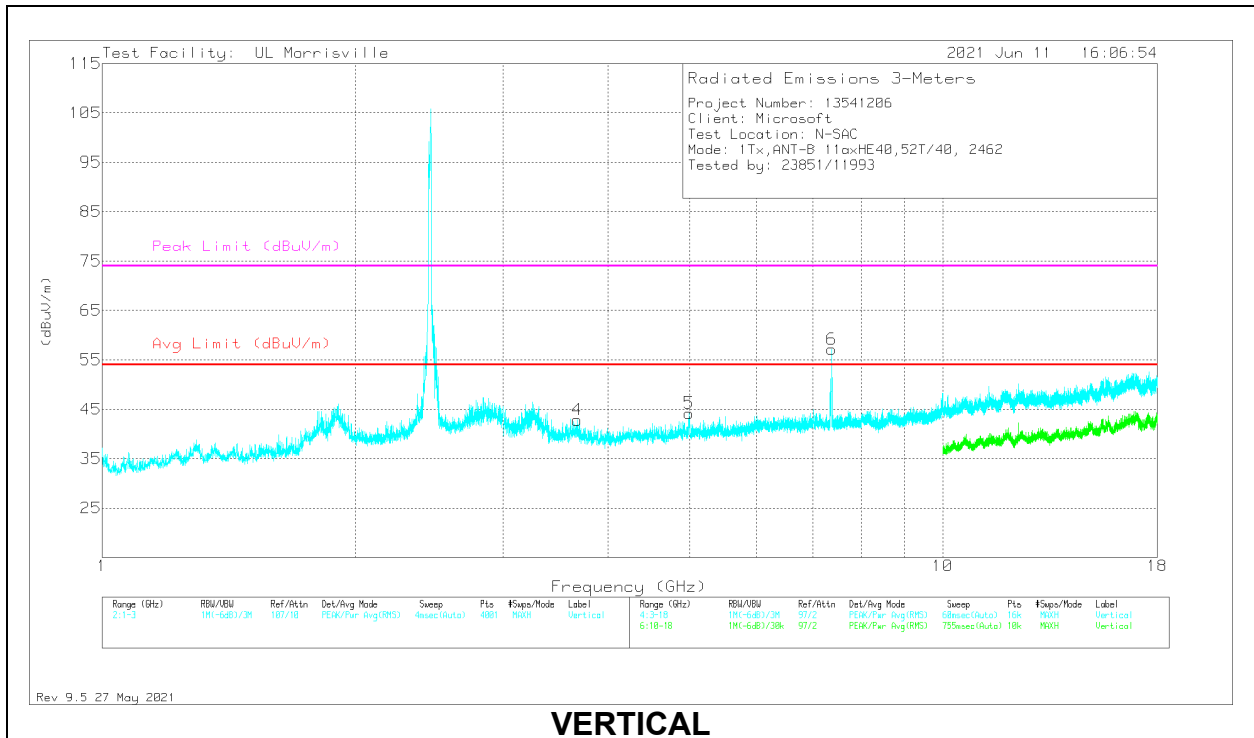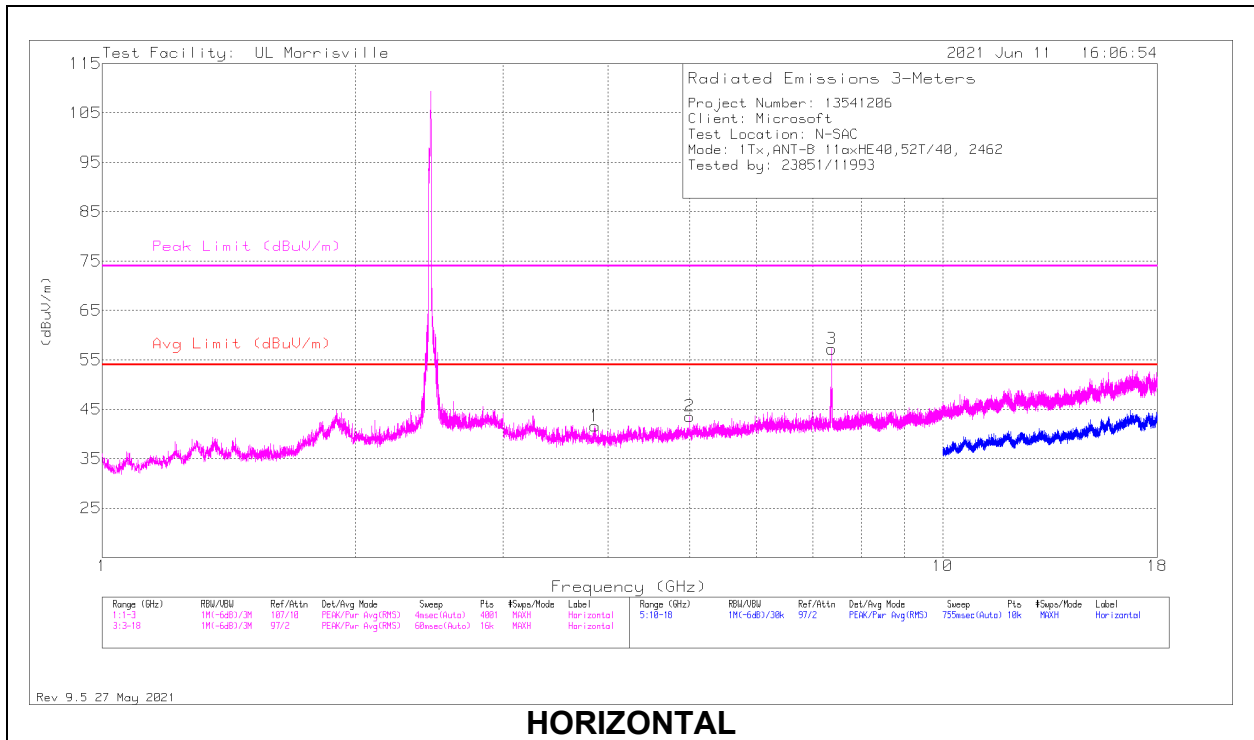

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 3.85781	40.43	Pk	33.3	-32.1	0	41.63	54	-12.37	74	-32.37	0-360	101	H
2	*** 4.99688	41.78	Pk	34.4	-32.6	0	43.58	54	-10.42	74	-30.42	0-360	101	H
3	*** 7.37692	53.27	PK2	35.6	-29.3	0	59.57	-	-	74	-14.43	246	130	H
	*** 7.3783	39.14	ADV	35.6	-29.3	.31	45.75	54	-8.25	-	-	246	130	H
4	*** 3.67313	41.15	Pk	33.4	-31.7	0	42.85	54	-11.15	74	-31.15	0-360	200	V
5	*** 4.99125	42.5	Pk	34.3	-32.6	0	44.2	54	-9.8	74	-29.8	0-360	101	V
6	*** 7.37689	53.96	PK2	35.6	-29.3	0	60.26	-	-	74	-13.74	345	254	V
	*** 7.37839	39.71	ADV	35.6	-29.3	.31	46.32	54	-7.68	-	-	345	254	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector



PK2 - Maximum Peak

ADV - Linear Voltage Average

1TX Antenna A MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL3 RESULTS

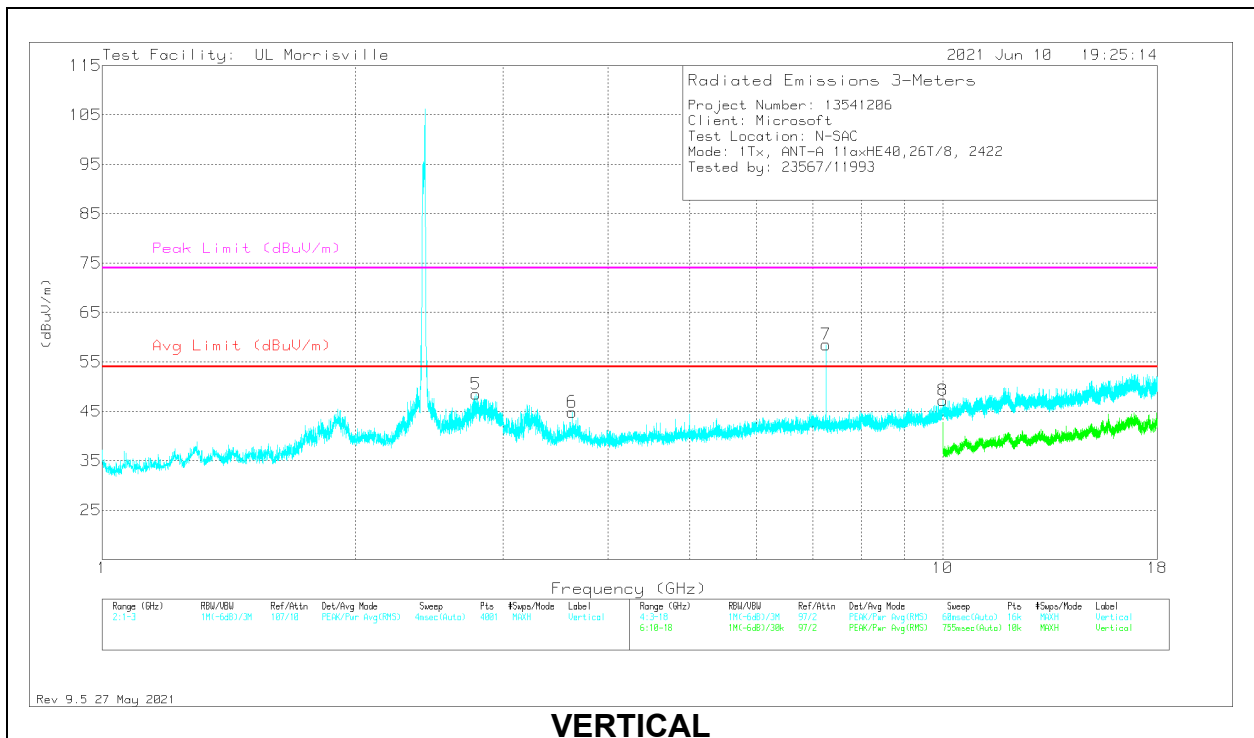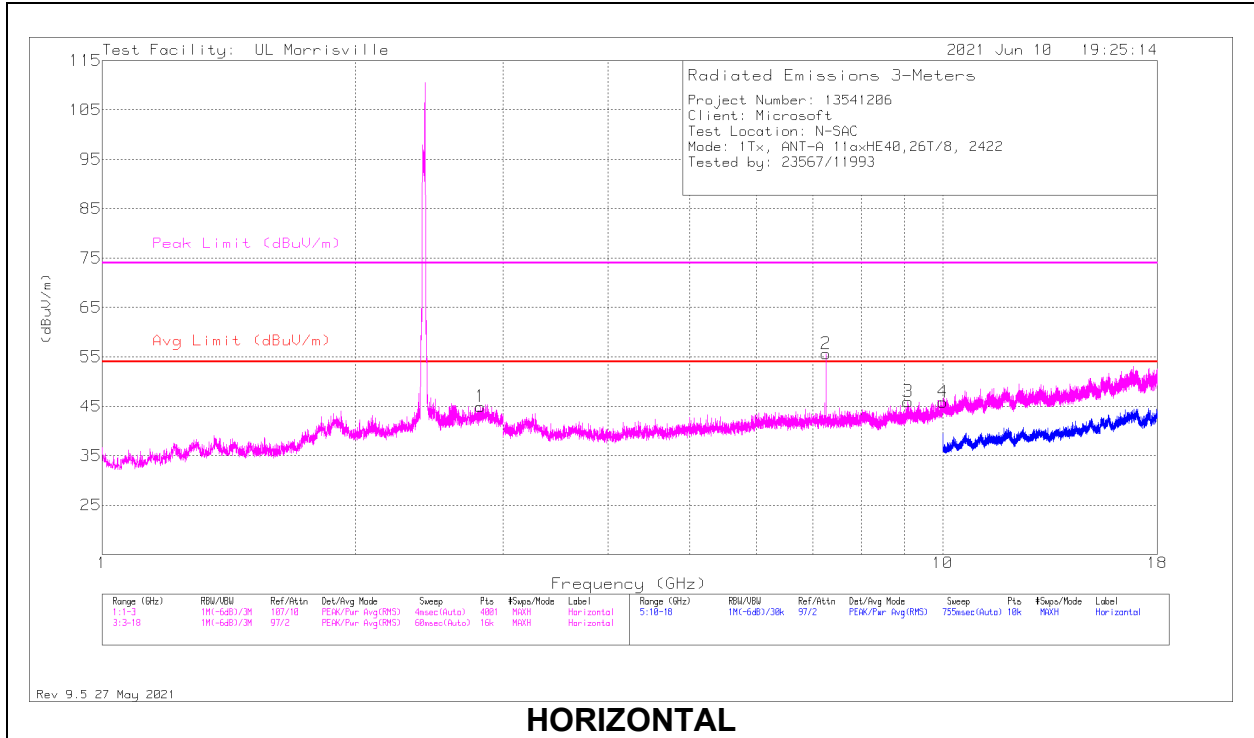

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* ** 2.78735	43.44	PK2	32.7	-23.8	0	52.34	-	-	74	-21.66	34	242	V
	* ** 2.78399	31.11	ADV	32.7	-23.8	.32	40.33	54	-13.67	-	-	34	242	V
2	* ** 7.25985	54.06	PK2	35.7	-29.4	0	60.36	-	-	74	-13.64	267	133	H
	* ** 7.26203	41.43	ADV	35.7	-29.4	.32	48.05	54	-5.95	-	-	267	133	H
7	* ** 7.26003	57.52	PK2	35.7	-29.4	0	63.82	-	-	74	-10.18	345	258	V
	* ** 7.26196	45.04	ADV	35.7	-29.4	.32	51.66	54	-2.34	-	-	345	258	V
1	* ** 2.819	36.05	Pk	32.6	-23.7	0	44.95	54	-9.05	74	-29.05	0-360	199	H
3	* ** 9.09281	37.77	Pk	36.3	-28.1	0	45.97	54	-8.03	74	-28.03	0-360	101	H
6	* ** 3.62156	42.84	Pk	33.3	-31.3	0	44.84	54	-9.16	74	-29.16	0-360	200	V
4	10.00031	36.36	Pk	37	-27.5	0	45.86	-	-	-	-	0-360	199	H
8	10.00031	37.72	Pk	37	-27.5	0	47.22	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL 6 RESULTS

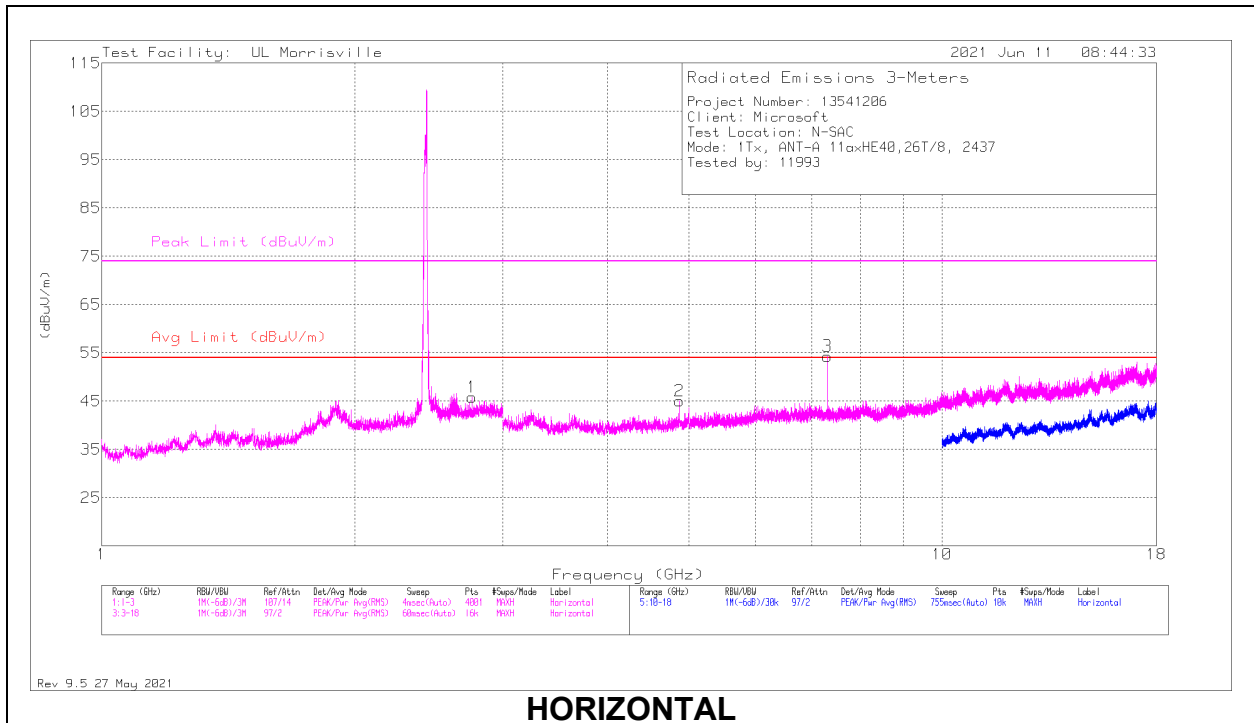

HORIZONTAL

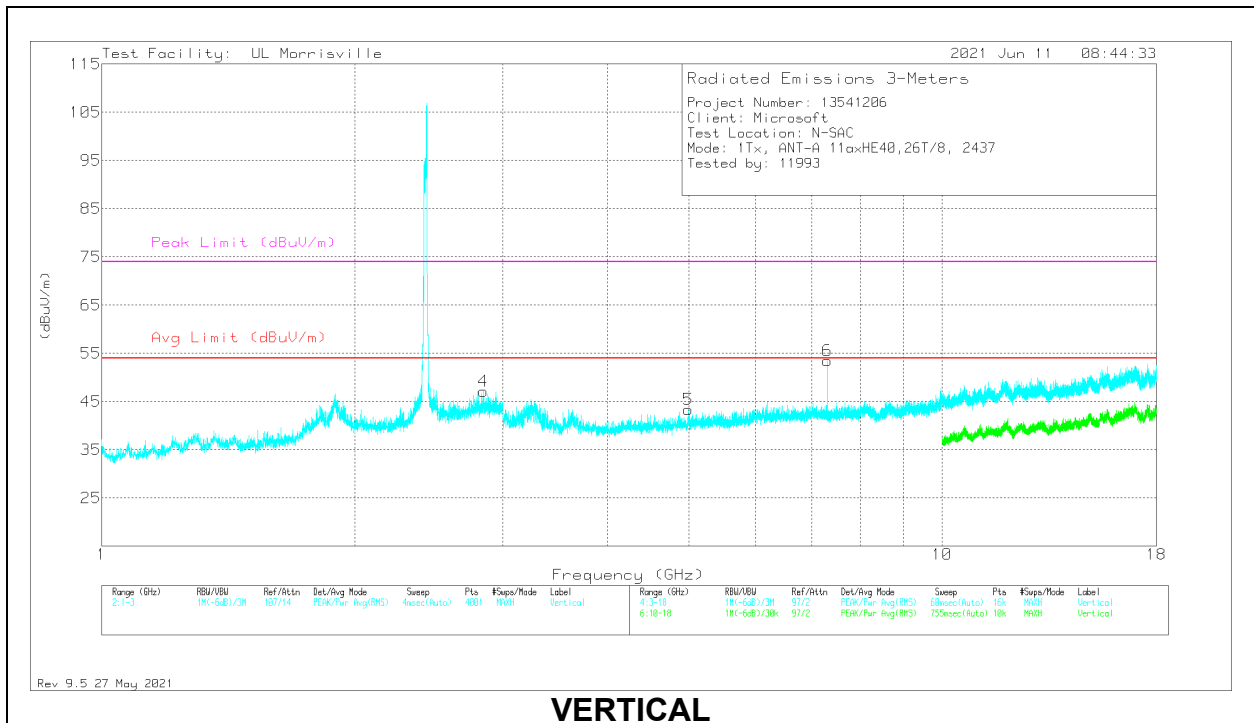

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.7575	37.04	Pk	32.6	-23.8	0	45.84	54	-8.16	74	-28.16	0-360	101	H
4	*** 2.844	38.28	Pk	32.4	-23.6	0	47.08	54	-6.92	74	-26.92	0-360	200	V
2	*** 4.87125	42.08	Pk	34.2	-31.2	0	45.08	54	-8.92	74	-28.92	0-360	101	H
3	*** 7.30518	52.7	PK2	35.6	-29.3	0	59	-	-	74	-15	276	117	H
	*** 7.30724	40.27	ADV	35.6	-29.3	.32	46.89	54	-7.11	-	-	276	117	H
5	*** 4.99219	41.63	Pk	34.3	-32.6	0	43.33	54	-10.67	74	-30.67	0-360	101	V
6	*** 7.30502	51.5	PK2	35.6	-29.3	0	57.8	-	-	74	-16.2	303	141	V
	*** 7.30714	39.47	ADV	35.6	-29.3	.32	46.09	54	-7.91	-	-	303	141	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL 11 RESULTS

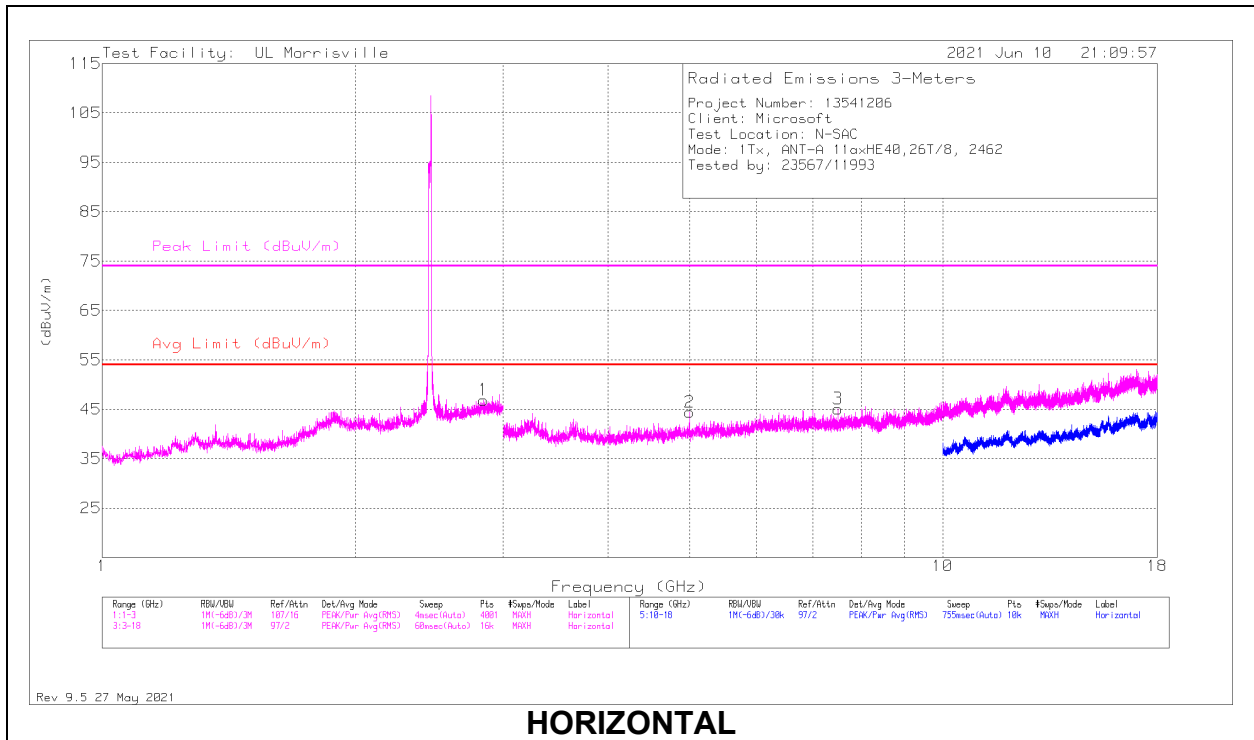

HORIZONTAL

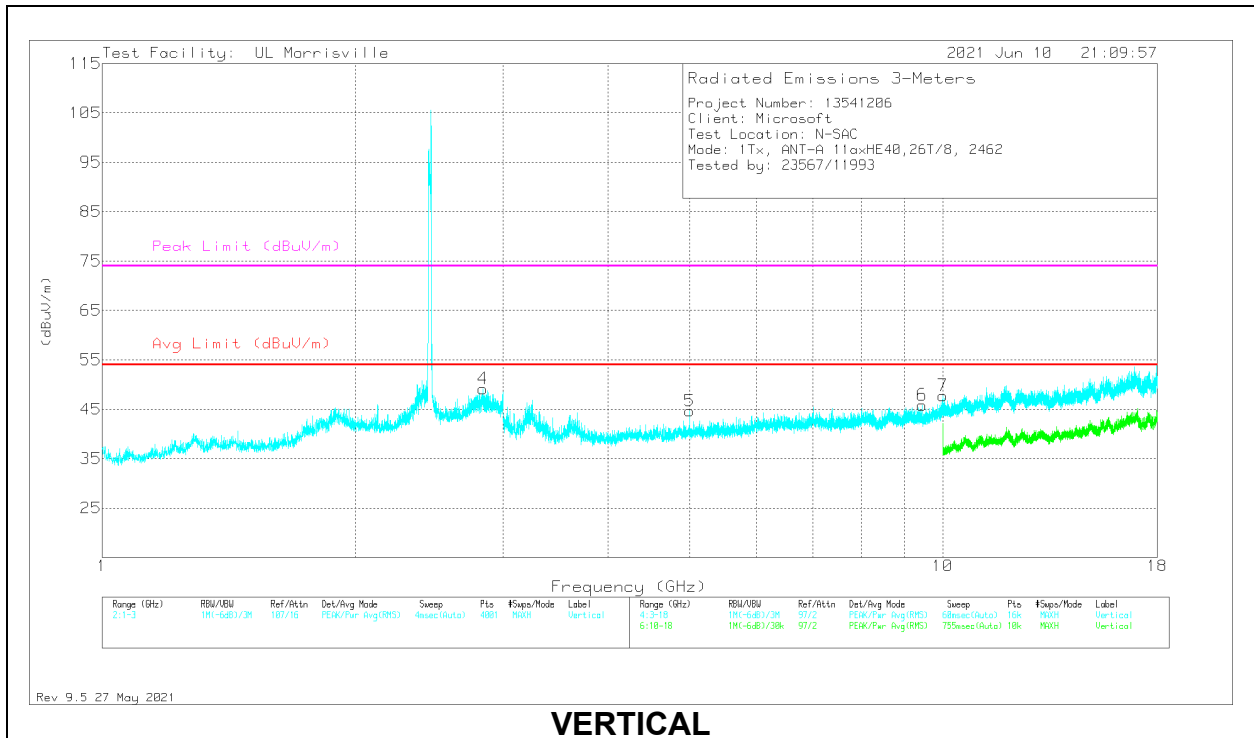

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.843	37.96	Pk	32.5	-23.6	0	46.86	54	-7.14	74	-27.14	0-360	101	H
4	* ** 2.83829	43.49	PK2	32.5	-23.6	0	52.39	-	-	74	-21.61	39	245	V
	* ** 2.83783	30.95	ADV	32.5	-23.6	.32	40.17	54	-13.83	-	-	39	245	V
2	* ** 4.99969	42.6	Pk	34.4	-32.6	0	44.4	54	-9.6	74	-29.6	0-360	101	H
3	* ** 7.50563	38.99	Pk	35.7	-29.6	0	45.09	54	-8.91	74	-28.91	0-360	101	H
5	* ** 4.99969	42.86	Pk	34.4	-32.6	0	44.66	54	-9.34	74	-29.34	0-360	101	V
6	* ** 9.4575	37.75	Pk	36.3	-28.2	0	45.85	54	-8.15	74	-28.15	0-360	101	V
7	10.00031	38.25	Pk	37	-27.5	0	47.75	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector



PK2 - Maximum Peak

ADV - Linear Voltage Average

1TX Antenna B MODE: 26-Tones, RU Index 8

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL 3 RESULTS

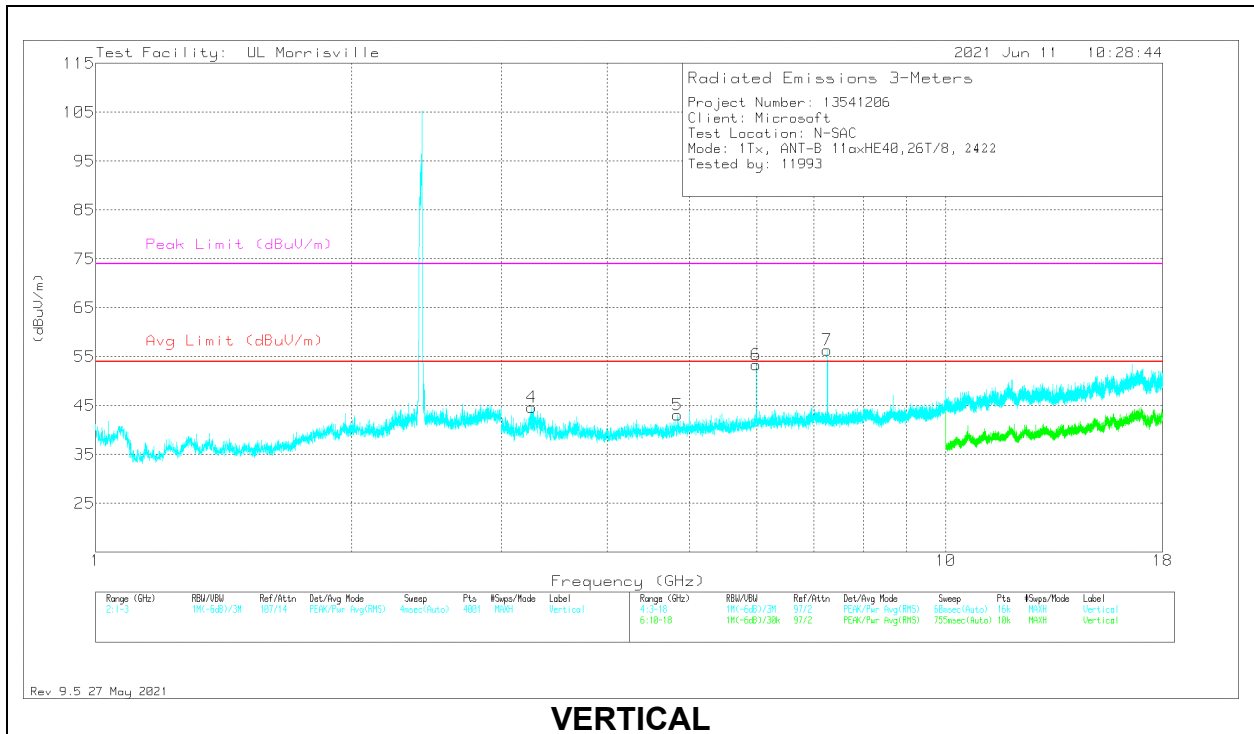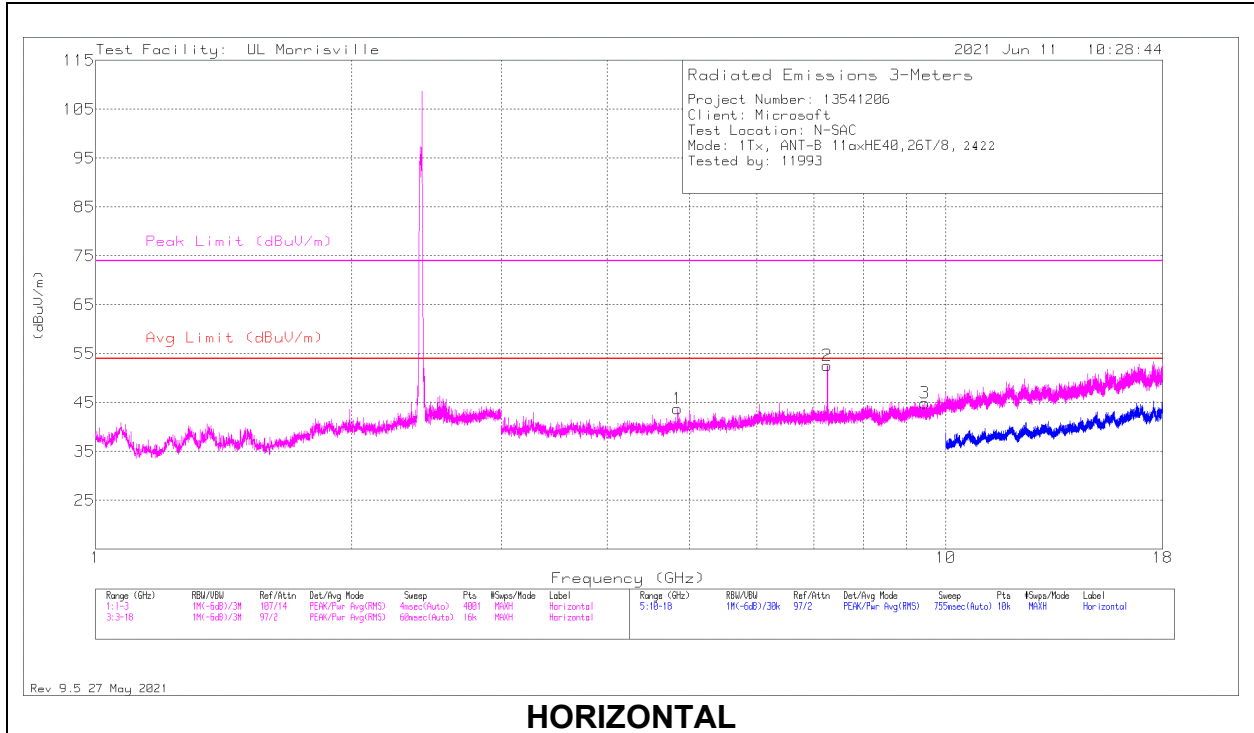

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.84125	40.71	Pk	34.1	-31.1	0	43.71	54	-10.29	74	-30.29	0-360	200	H
2	*** 7.26246	51.79	PK2	35.7	-29.3	0	58.19	-	-	74	-15.81	252	180	H
	*** 7.26219	40.21	ADV	35.7	-29.3	.32	46.93	54	-7.07	-	-	252	180	H
3	*** 9.45	36.81	Pk	36.3	-28.2	0	44.91	54	-9.09	74	-29.09	0-360	101	H
4	*** 3.26063	44.58	Pk	32.9	-32.8	0	44.68	54	-9.32	74	-29.32	0-360	200	V
5	*** 4.84125	40.06	Pk	34.1	-31.1	0	43.06	54	-10.94	74	-30.94	0-360	200	V
7	*** 7.26013	54.84	PK2	35.7	-29.4	0	61.14	-	-	74	-12.86	347	246	V
	*** 7.26192	44.02	ADV	35.7	-29.4	.32	50.64	54	-3.36	-	-	347	246	V
6	5.985	48.37	Pk	35.2	-30.2	0	53.37	-	-	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL 6 RESULTS

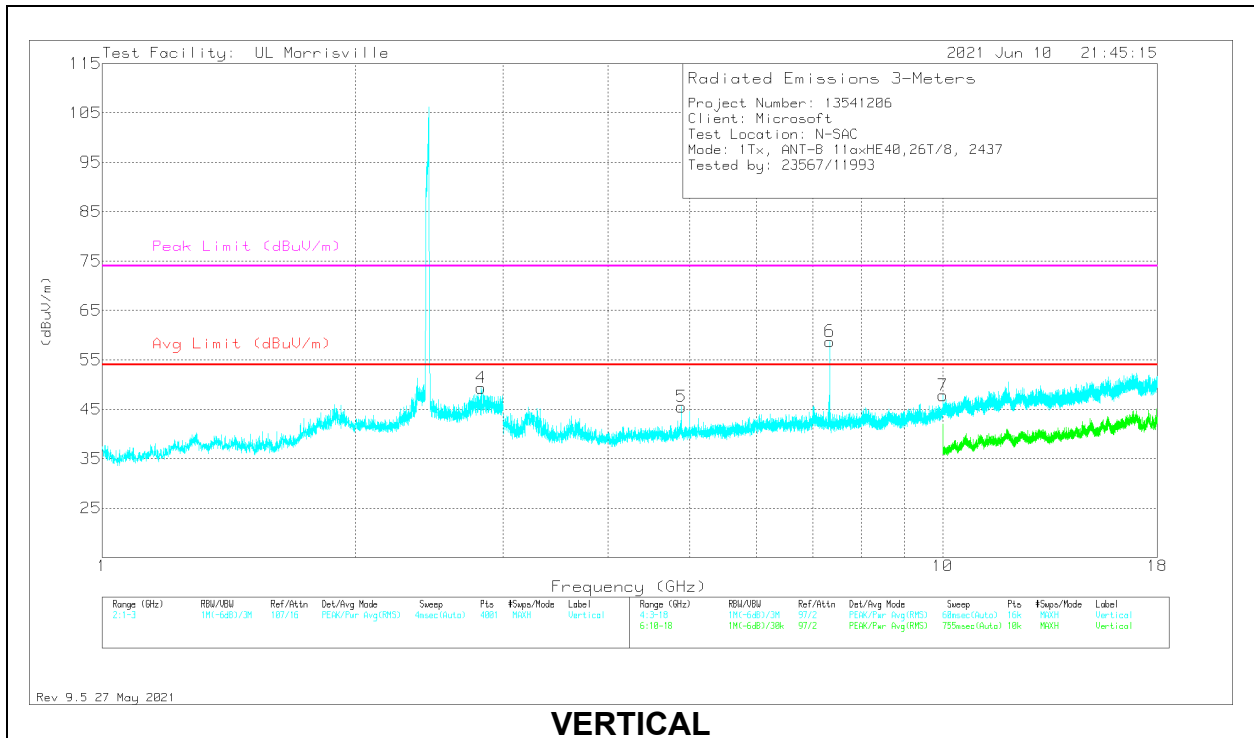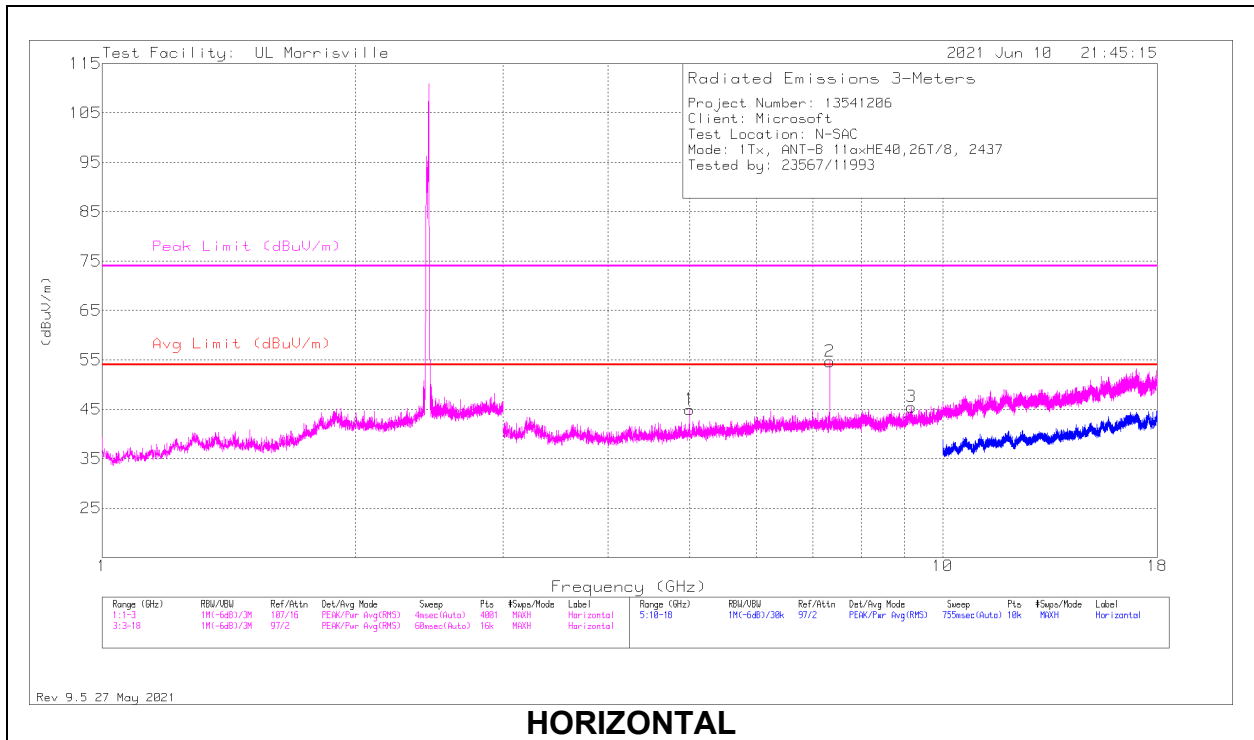

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* ** 2.82066	44.4	PK2	32.6	-23.7	0	53.3	-	-	74	-20.7	34	239	V
	* ** 2.82124	32.06	ADV	32.6	-23.7	.32	41.28	54	-12.72	-	-	34	239	V
2	* ** 7.33422	53.24	PK2	35.6	-29.2	0	59.64	-	-	74	-14.36	255	139	H
	* ** 7.3365	39.89	ADV	35.6	-29.2	.32	46.61	54	-7.39	-	-	255	139	H
6	* ** 7.33416	54.63	PK2	35.6	-29.2	0	61.03	-	-	74	-12.97	351	150	V
	* ** 7.33598	42.81	ADV	35.6	-29.2	.32	49.53	54	-4.47	-	-	351	150	V
1	* ** 4.99969	43.15	Pk	34.4	-32.6	0	44.95	54	-9.05	74	-29.05	0-360	101	H
3	* ** 9.17813	37.19	Pk	36.3	-28	0	45.49	54	-8.51	74	-28.51	0-360	200	H
5	* ** 4.89094	42.72	Pk	34.2	-31.4	0	45.52	54	-8.48	74	-28.48	0-360	200	V
7	10.00031	38.32	Pk	37	-27.5	0	47.82	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL 11 RESULTS

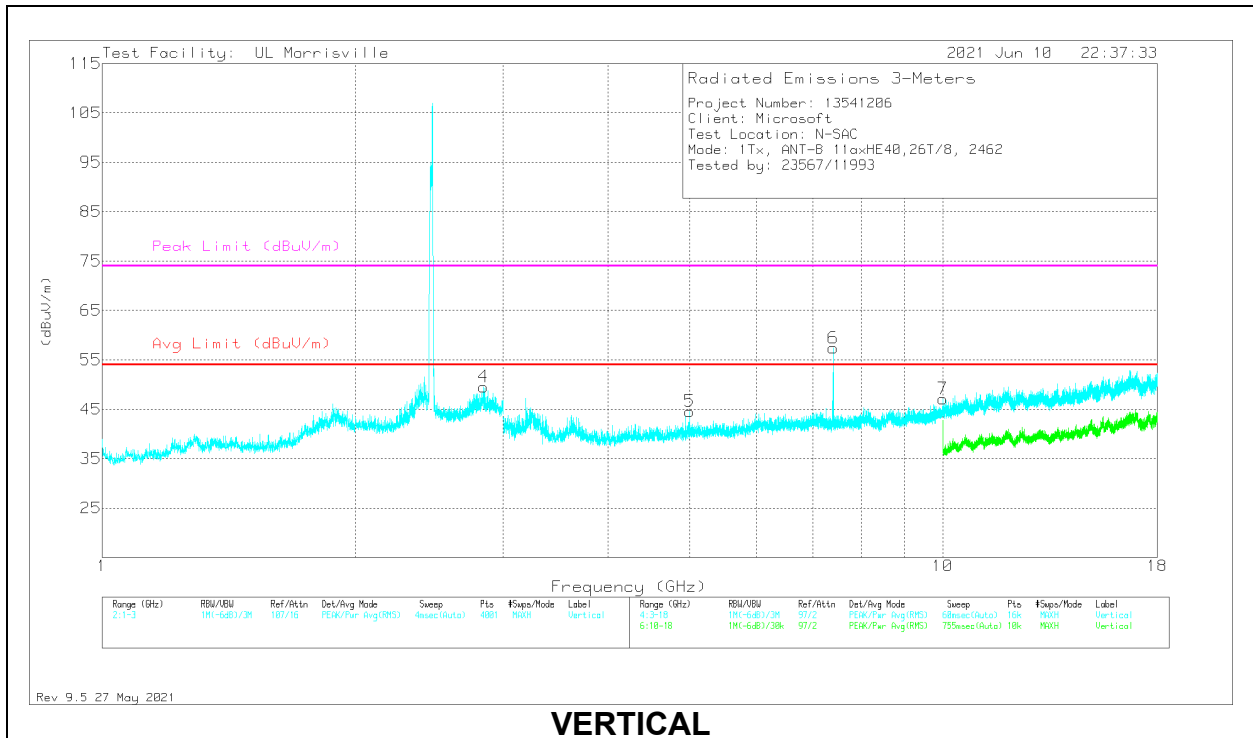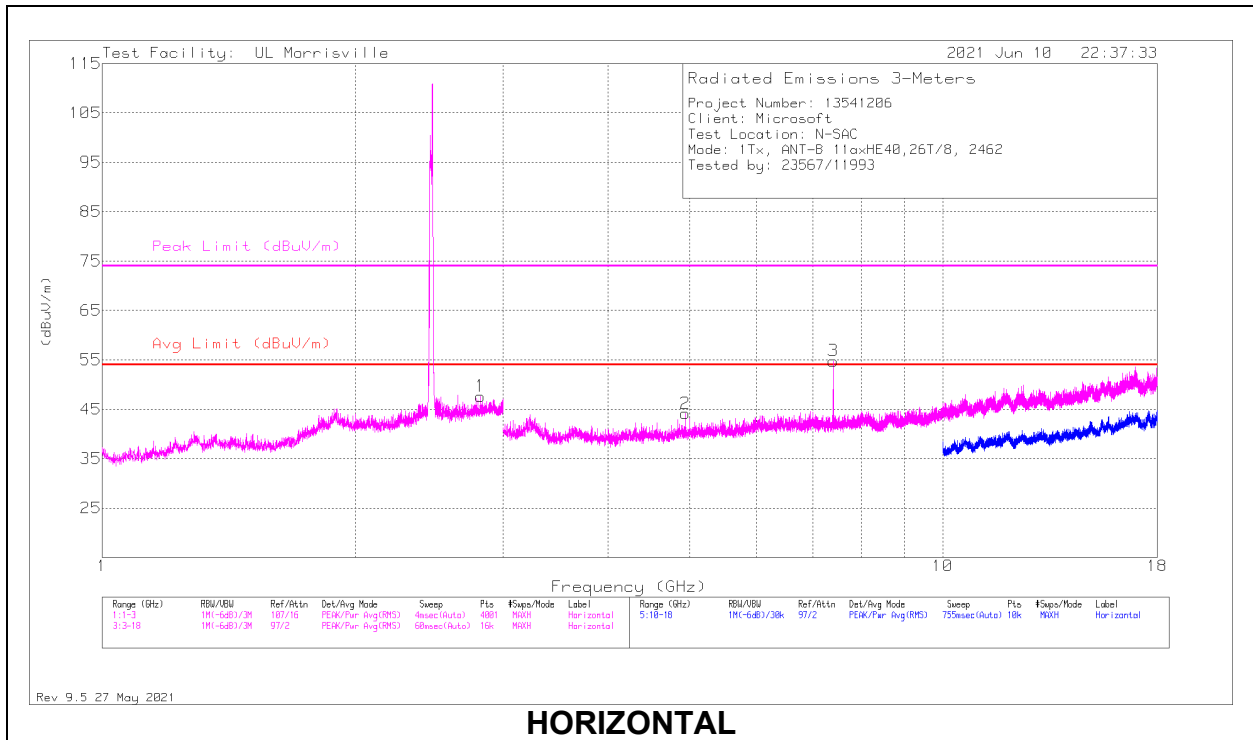

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* ** 2.84427	44.85	PK2	32.4	-23.6	0	53.65	-	-	74	-20.35	33	260	V
	* ** 2.8425	32.54	ADV	32.5	-23.6	.32	41.76	54	-12.24	-	-	33	260	V
3	* ** 7.40944	54.07	PK2	35.7	-29.2	0	60.57	-	-	74	-13.43	26	289	H
	* ** 7.41131	41.44	ADV	35.7	-29.2	.32	48.26	54	-5.74	-	-	26	289	H
6	* ** 7.40929	55.3	PK2	35.7	-29.2	0	61.8	-	-	74	-12.2	355	151	V
	* ** 7.4112	43.16	ADV	35.7	-29.2	.32	49.98	54	-4.02	-	-	355	151	V
1	* ** 2.8175	38.73	Pk	32.6	-23.7	0	47.63	54	-6.37	74	-26.37	0-360	200	H
2	* ** 4.93969	42.06	Pk	34.3	-32.2	0	44.16	54	-9.84	74	-29.84	0-360	101	H
5	* ** 4.99969	42.79	Pk	34.4	-32.6	0	44.59	54	-9.41	74	-29.41	0-360	200	V
7	10.00031	37.62	Pk	37	-27.5	0	47.12	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: SU, Single User

BANDEDGE (LOW CHANNEL 3)

HORIZONTAL RESULT

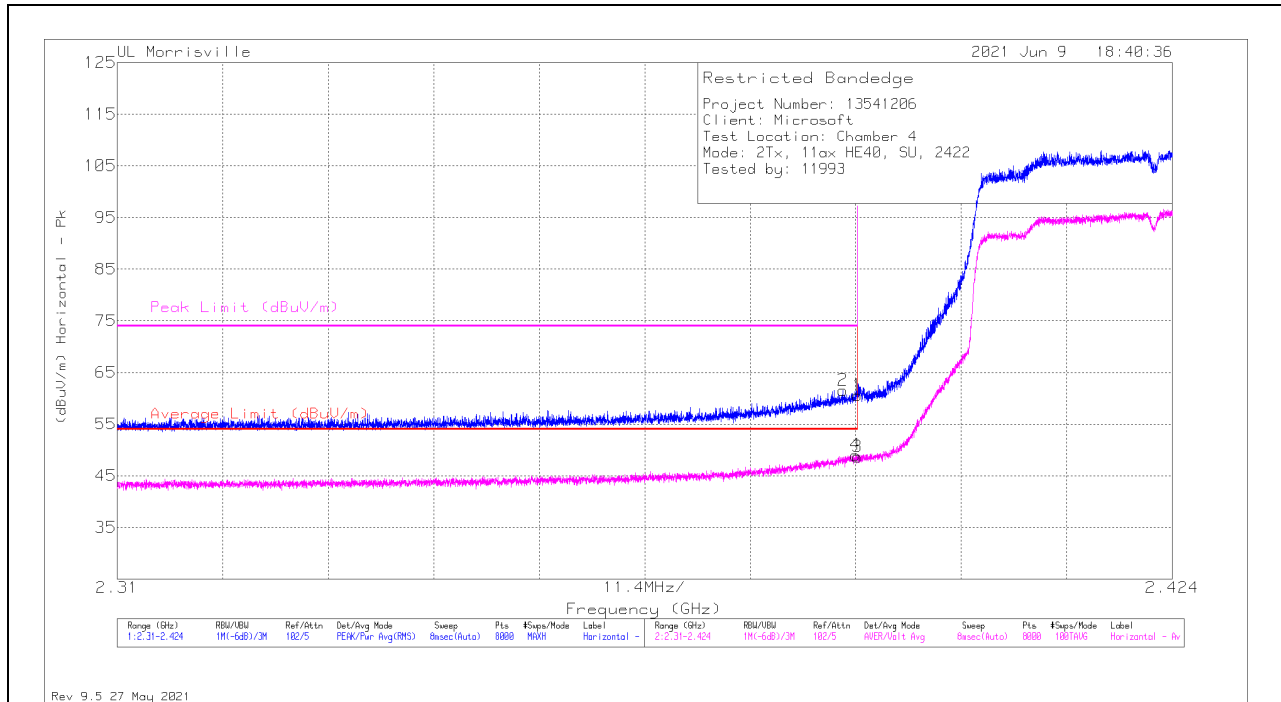

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	32.38	Pk	32	-13.8	10	0	60.58	-	-	74	-13.42	323	151	H
2	* ** 2.38841	33.36	Pk	32	-13.8	10	0	61.56	-	-	74	-12.44	323	151	H
3	* ** 2.39	20.18	ADV	32	-13.8	10	.3	48.68	54	-5.32	-	-	323	151	H
4	* ** 2.3898	20.54	ADV	32	-13.8	10	.3	49.04	54	-4.96	-	-	323	151	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

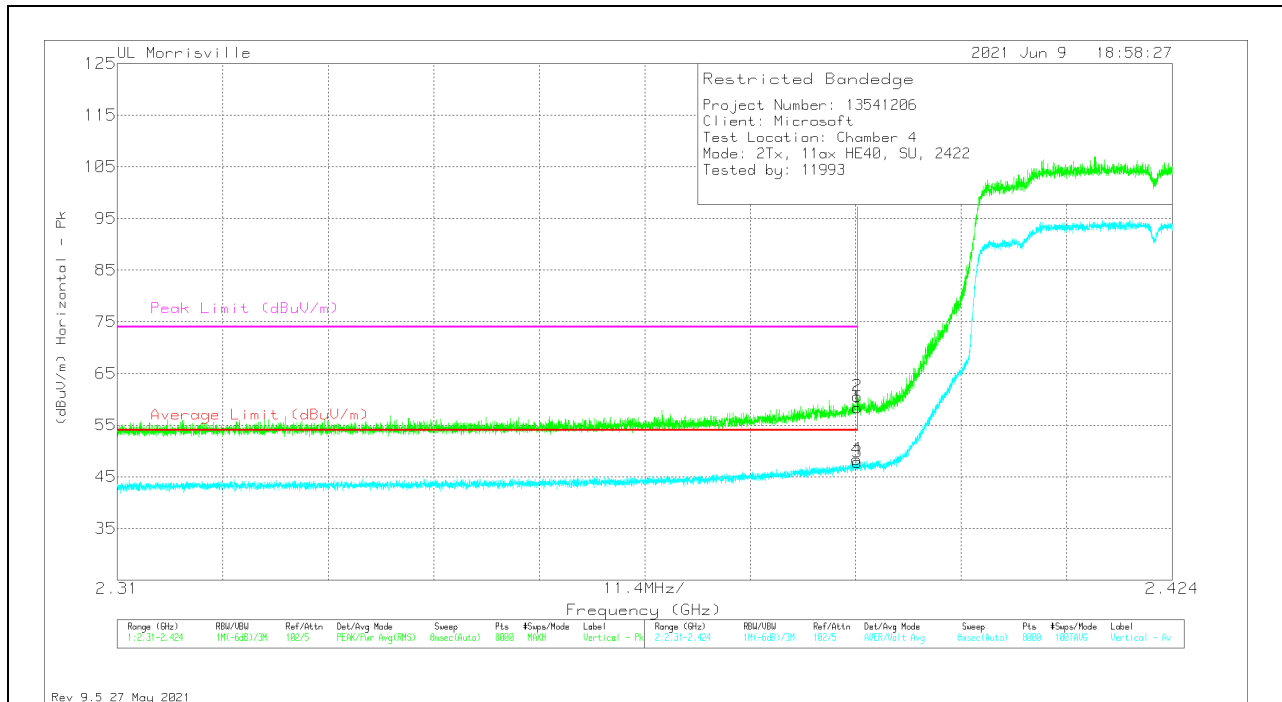


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	30.17	Pk	32	-13.8	10	0	58.37	-	-	74	-15.63	274	312	V
2	*** 2.38995	32.41	Pk	32	-13.8	10	0	60.61	-	-	74	-13.39	274	312	V
3	*** 2.39	19.34	ADV	32	-13.8	10	.3	47.84	54	-6.16	-	-	274	312	V
4	*** 2.38993	19.89	ADV	32	-13.8	10	.3	48.39	54	-5.61	-	-	274	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 9)


HORIZONTAL RESULT

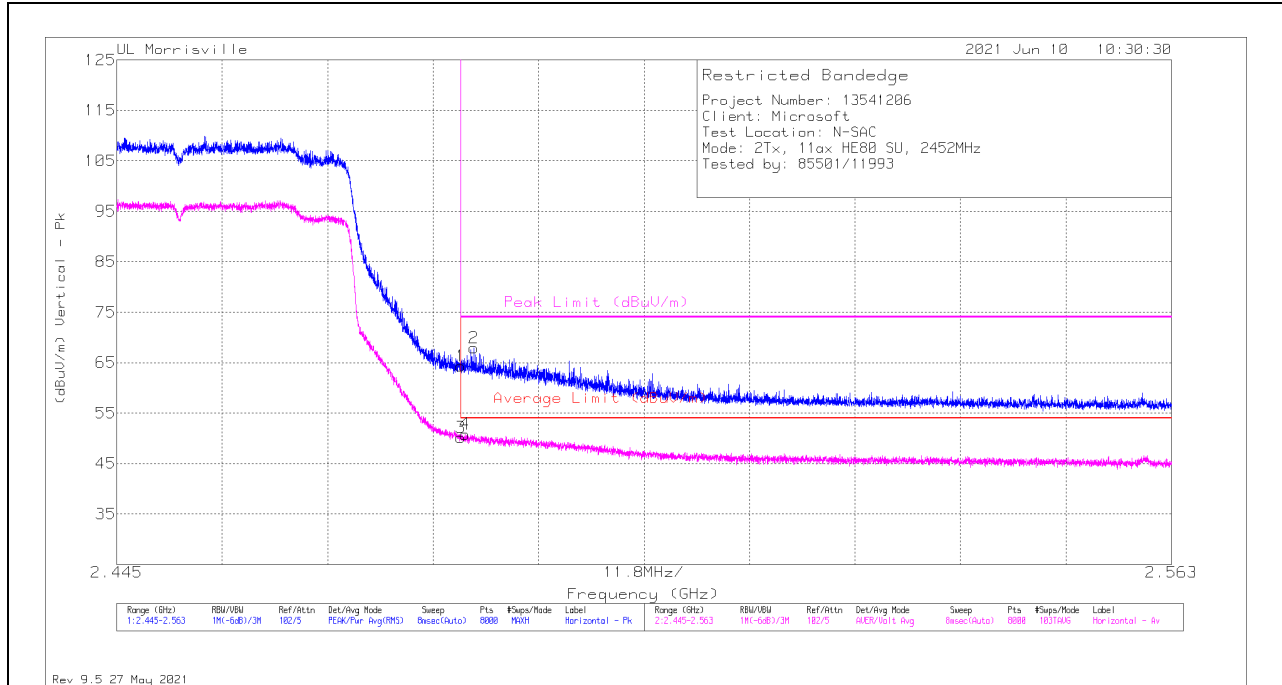

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	35.45	Pk	32.6	-13.7	10	0	64.35	-	-	74	-9.65	332	113	H
2	*** 2.48498	39.01	Pk	32.6	-13.7	10	0	67.91	-	-	74	-6.09	332	113	H
3	*** 2.4835	20.97	ADV	32.6	-13.7	10	.3	50.17	54	-3.83	-	-	332	113	H
4	*** 2.484	21.65	ADV	32.6	-13.7	10	.3	50.85	54	-3.15	-	-	332	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

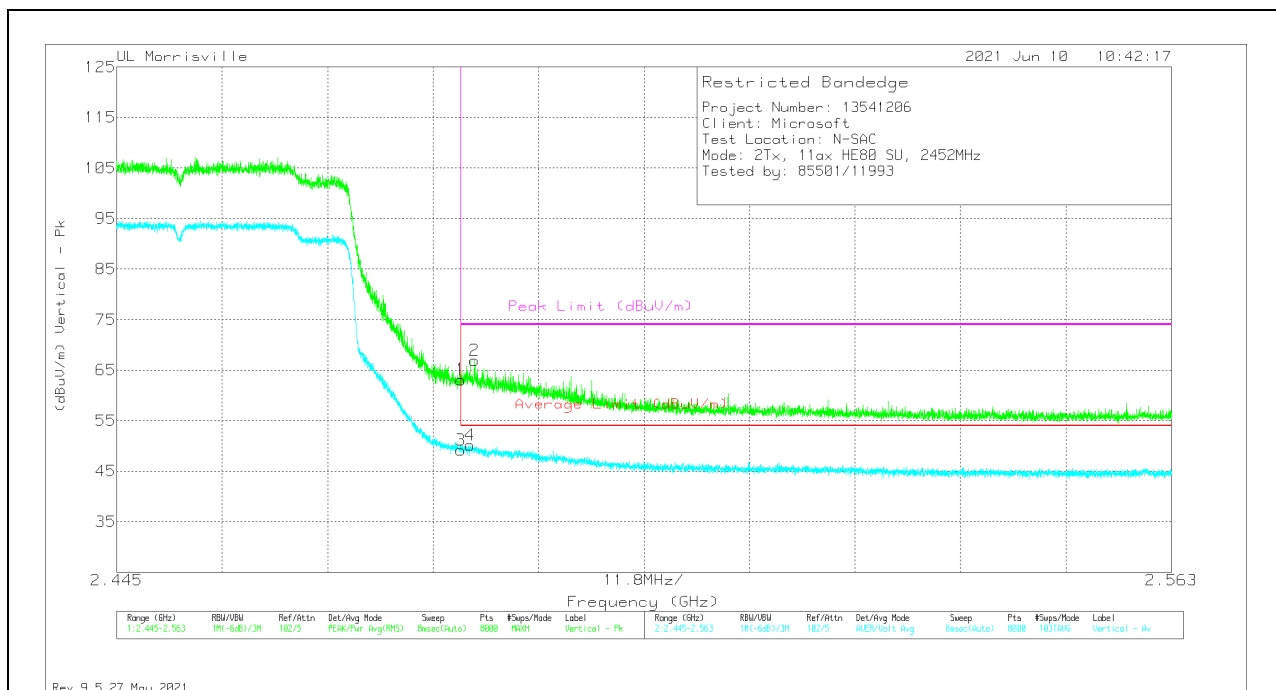

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	34.24	Pk	32.6	-13.7	10	0	63.14	-	-	74	-10.86	311	220	V
2	*** 2.48502	38	Pk	32.6	-13.7	10	0	66.9	-	-	74	-7.1	311	220	V
3	*** 2.4835	20.01	ADV	32.6	-13.7	10	.3	49.21	54	-4.79	-	-	311	220	V
4	*** 2.48451	20.97	ADV	32.6	-13.7	10	.3	50.17	54	-3.83	-	-	311	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 10)

HORIZONTAL RESULT

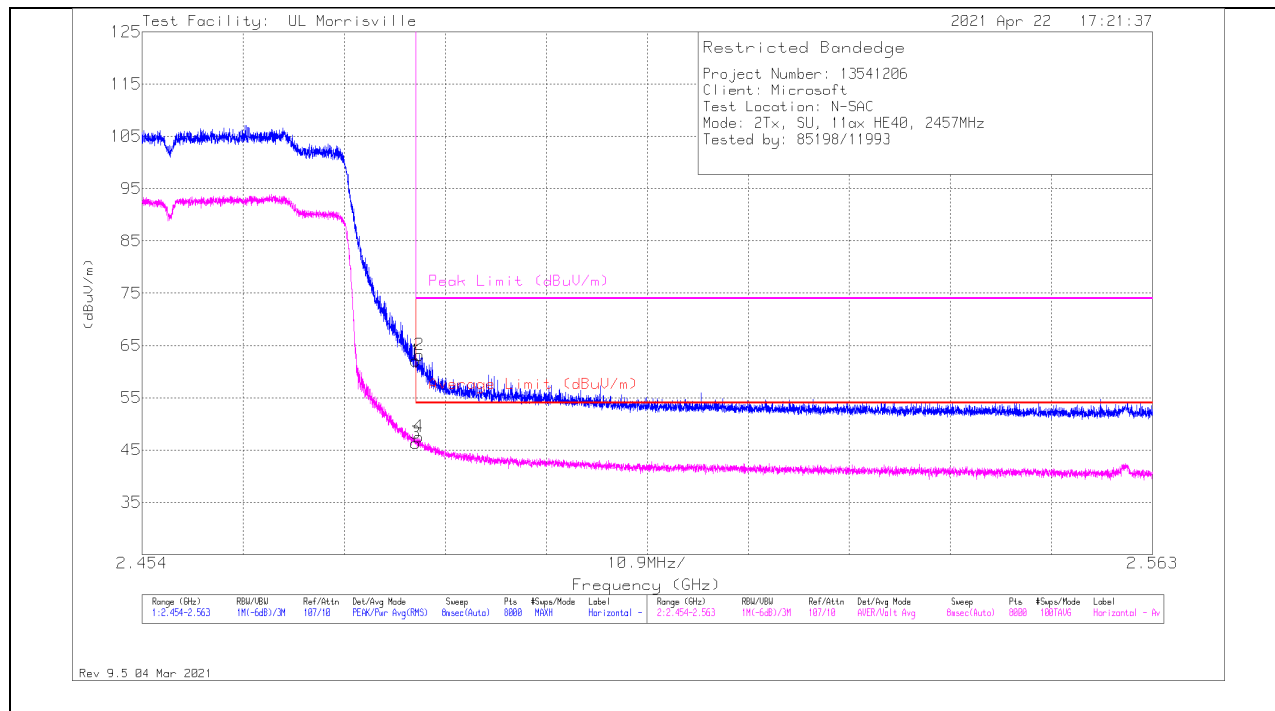

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	44	Pk	32.4	-24.3	10	0	62.1	-	-	74	-11.9	28	153	H
2	* ** 2.48391	45.09	Pk	32.4	-24.3	10	0	63.19	-	-	74	-10.81	28	153	H
3	* ** 2.4835	27.92	ADV	32.4	-24.3	10	.3	46.32	54	-7.68	-	-	28	153	H
4	* ** 2.48384	29.15	ADV	32.4	-24.3	10	.3	47.55	54	-6.45	-	-	28	153	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

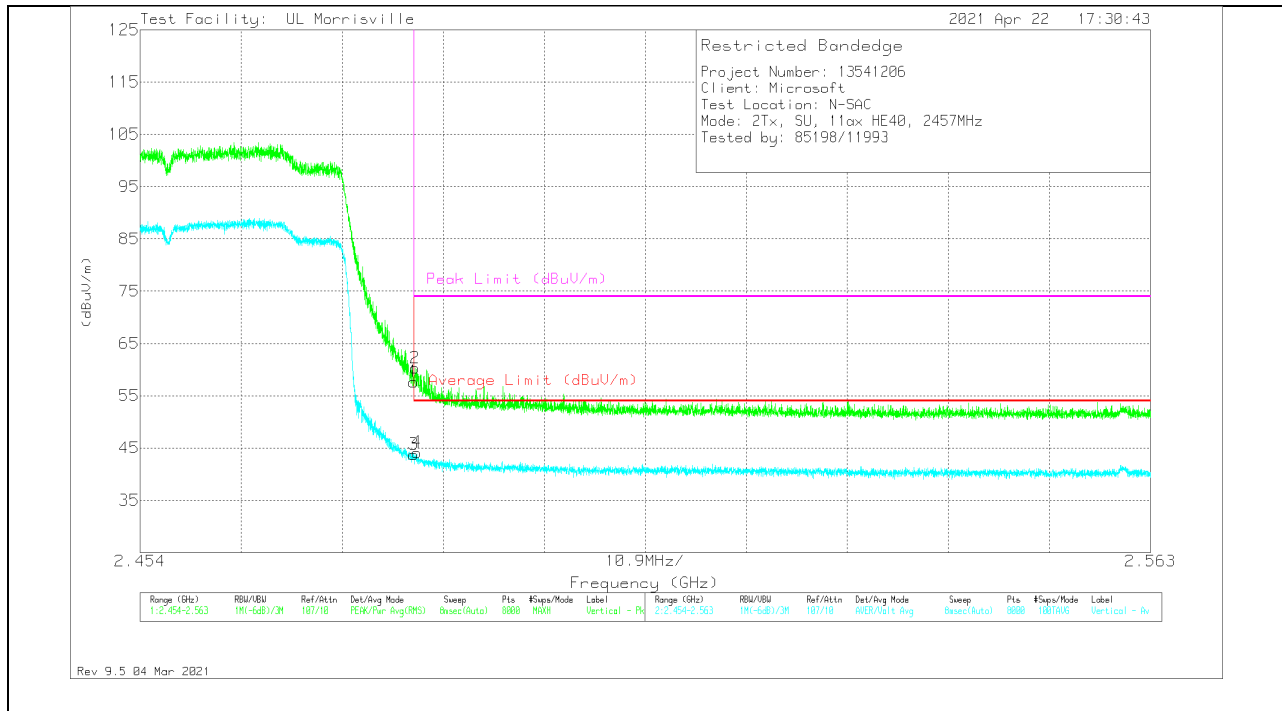

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	39.59	Pk	32.4	-24.3	10	0	57.69	-	-	74	-16.31	88	261	V
2	*** 2.48365	42.19	Pk	32.4	-24.3	10	0	60.29	-	-	74	-13.71	88	261	V
3	*** 2.4835	25.39	ADV	32.4	-24.3	10	.3	43.79	54	-10.21	-	-	88	261	V
4	*** 2.48386	25.75	ADV	32.4	-24.3	10	.3	44.15	54	-9.85	-	-	88	261	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 11)

HORIZONTAL RESULT

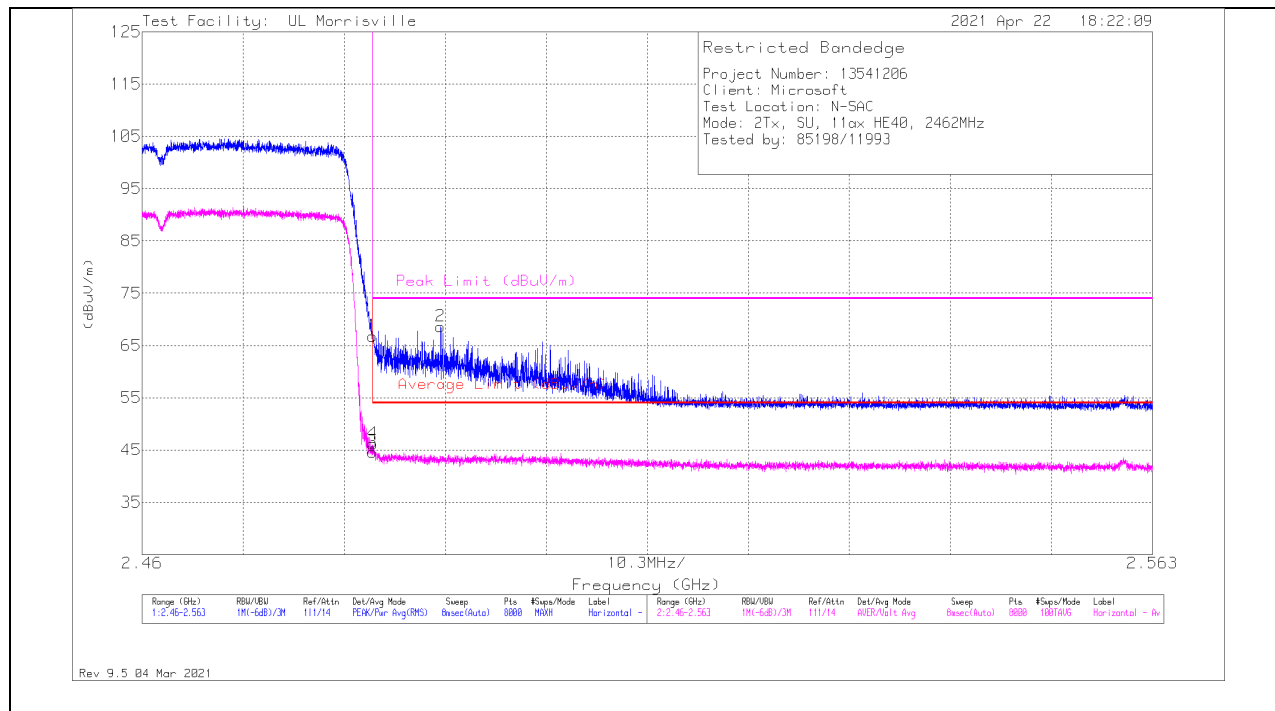

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	48.72	Pk	32.4	-24.3	10	0	66.82	-	-	74	-7.18	27	132	H
2	* ** 2.49044	50.45	Pk	32.5	-24.3	10	0	68.65	-	-	74	-5.35	27	132	H
3	* ** 2.4835	26.2	ADV	32.4	-24.3	10	.3	44.6	54	-9.4	-	-	27	132	H
4	* ** 2.48351	27.82	ADV	32.4	-24.3	10	.3	46.22	54	-7.78	-	-	27	132	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

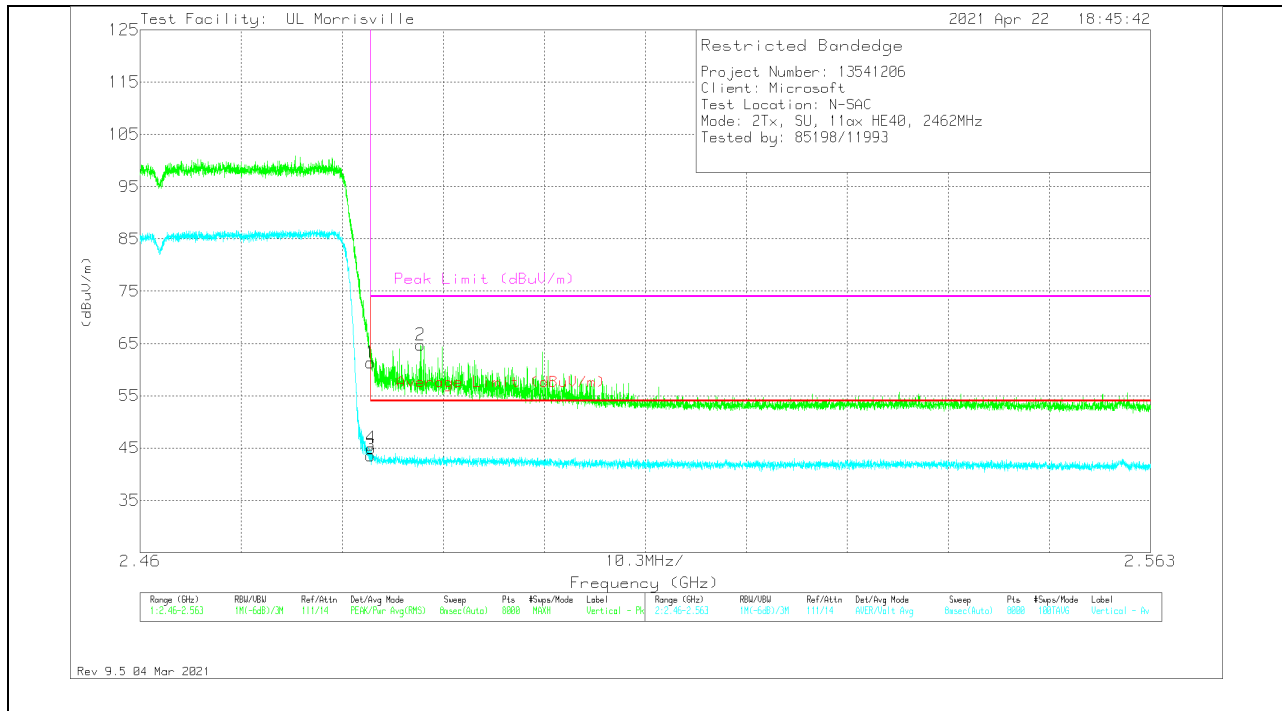

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	43.25	Pk	32.4	-24.3	10	0	61.35	-	-	74	-12.65	83	275	V
2	* ** 2.4886	46.51	Pk	32.5	-24.3	10	0	64.71	-	-	74	-9.29	83	275	V
3	* ** 2.4835	25.18	ADV	32.4	-24.3	10	.3	43.58	54	-10.42	-	-	83	275	V
4	* ** 2.48354	26.59	ADV	32.4	-24.3	10	.3	44.99	54	-9.01	-	-	83	275	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL 3)

HORIZONTAL RESULT

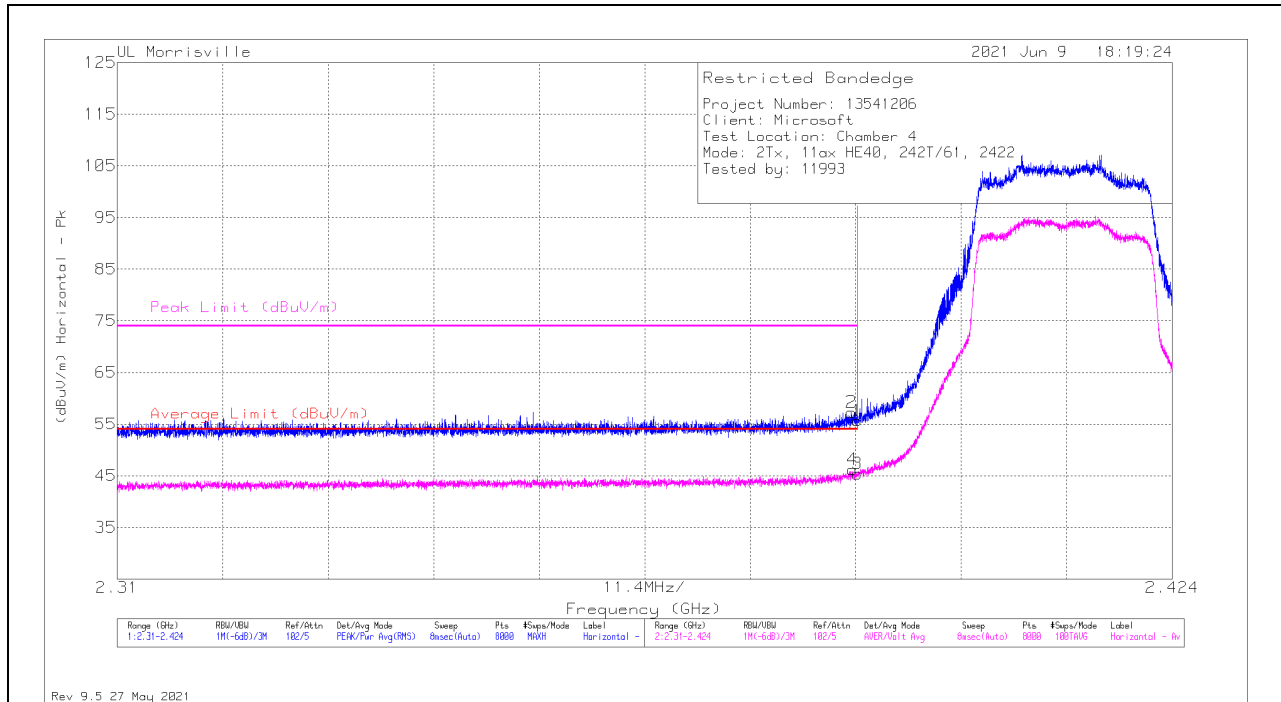

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	27.46	Pk	32	-13.8	10	0	55.66	-	-	74	-18.34	339	167	H
2	*** 2.38933	29.08	Pk	32	-13.8	10	0	57.28	-	-	74	-16.72	339	167	H
3	*** 2.39	16.89	ADV	32	-13.8	10	.31	45.4	54	-8.6	-	-	339	167	H
4	*** 2.38944	17.68	ADV	32	-13.8	10	.31	46.19	54	-7.81	-	-	339	167	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

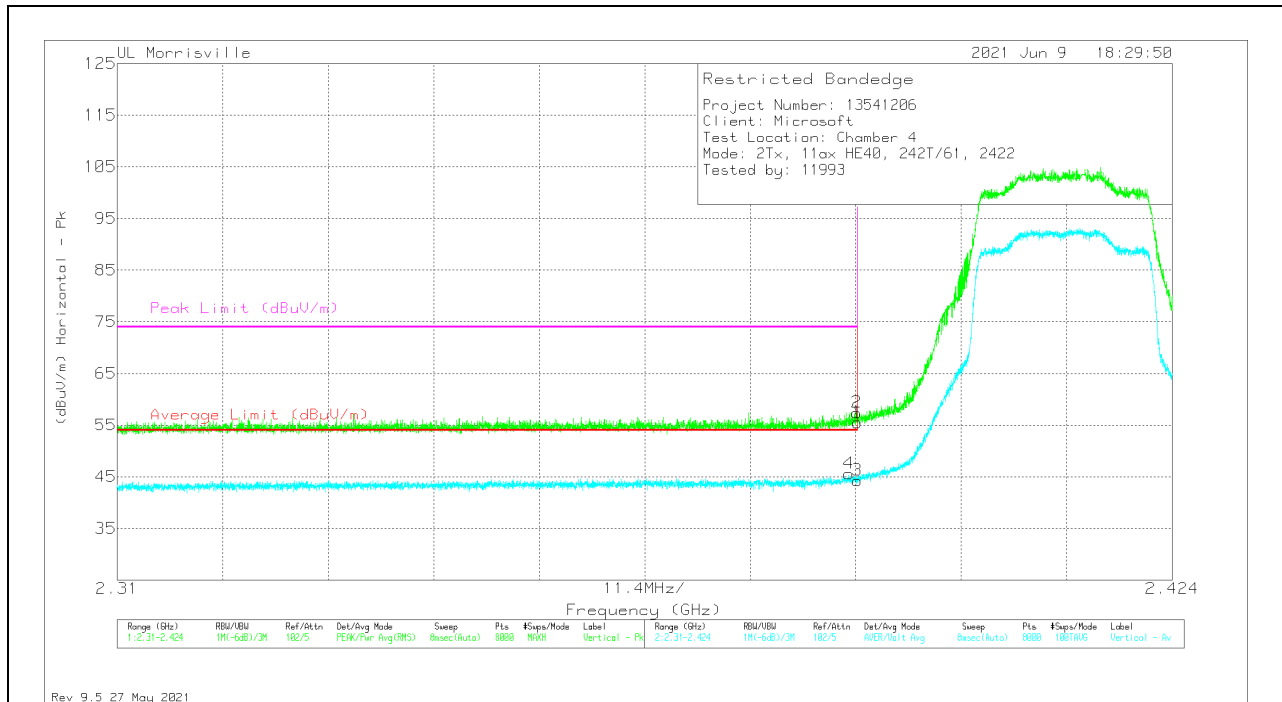


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	27.32	Pk	32	-13.8	10	0	55.52	-	-	74	-18.48	329	268	V
2	*** 2.38993	29.24	Pk	32	-13.8	10	0	57.44	-	-	74	-16.56	329	268	V
3	*** 2.39	15.78	ADV	32	-13.8	10	.31	44.29	54	-9.71	-	-	329	268	V
4	*** 2.38906	17.11	ADV	32	-13.8	10	.31	45.62	54	-8.38	-	-	329	268	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 242-Tones, RU Index 62

BANDEDGE (HIGH CHANNEL 9)

HORIZONTAL RESULT

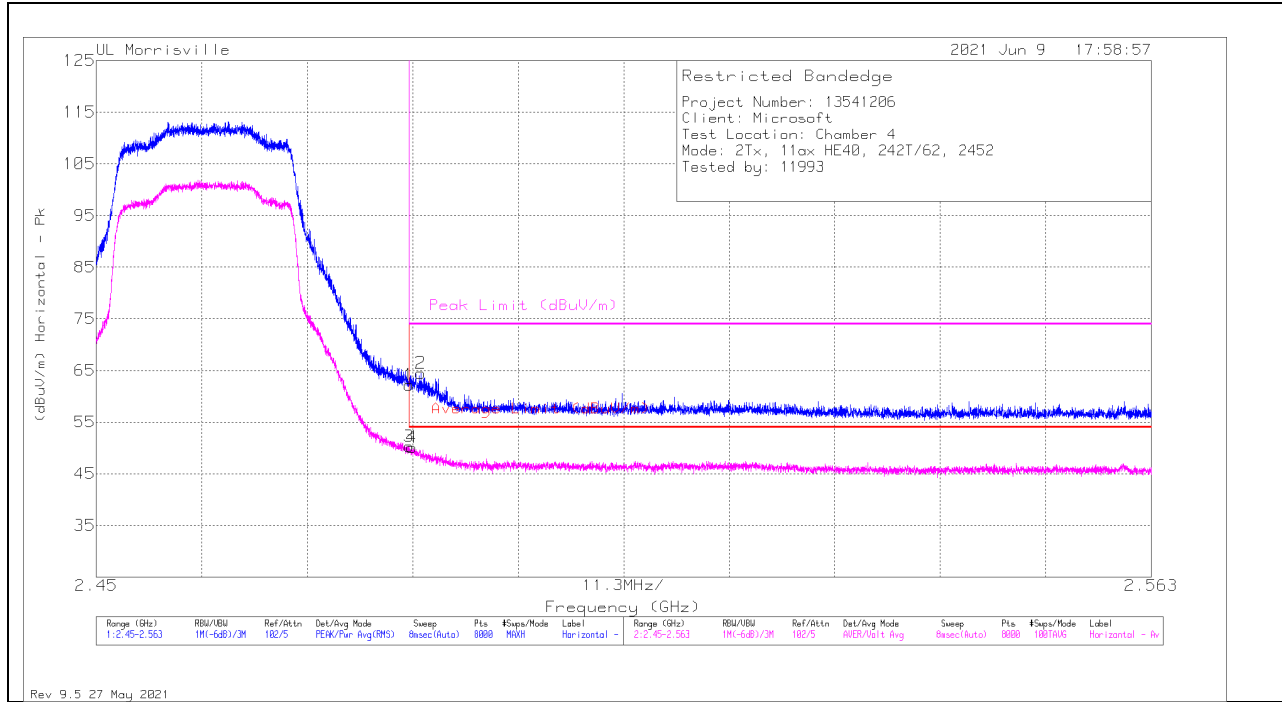

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.48351	33.31	Pk	32.6	-13.7	10	0	62.21	-	-	74	-11.79	316	100	H
2	*** 2.48475	35.57	Pk	32.6	-13.7	10	0	64.47	-	-	74	-9.53	316	100	H
3	*** 2.48351	21.11	ADV	32.6	-13.7	10	.31	50.32	54	-3.68	-	-	316	100	H
4	*** 2.48381	20.87	ADV	32.6	-13.7	10	.31	50.08	54	-3.92	-	-	316	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

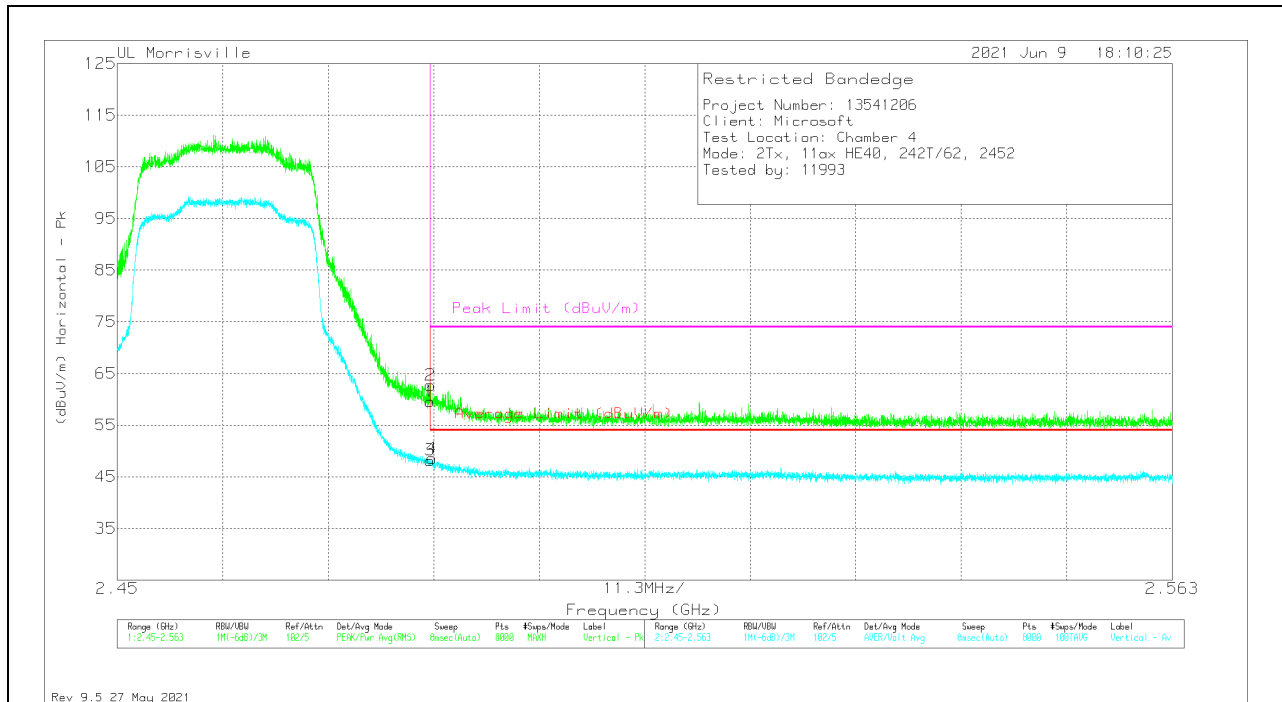


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.48351	30.65	Pk	32.6	-13.7	10	0	59.55	-	-	74	-14.45	293	300	V
2	** 2.48354	33.8	Pk	32.6	-13.7	10	0	62.7	-	-	74	-11.3	293	300	V
3	*** 2.48351	18.98	ADV	32.6	-13.7	10	.31	48.19	54	-5.81	-	-	293	300	V
4	*** 2.48369	19.36	ADV	32.6	-13.7	10	.31	48.57	54	-5.43	-	-	293	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEGE (HIGH CHANNEL 10)


HORIZONTAL RESULT

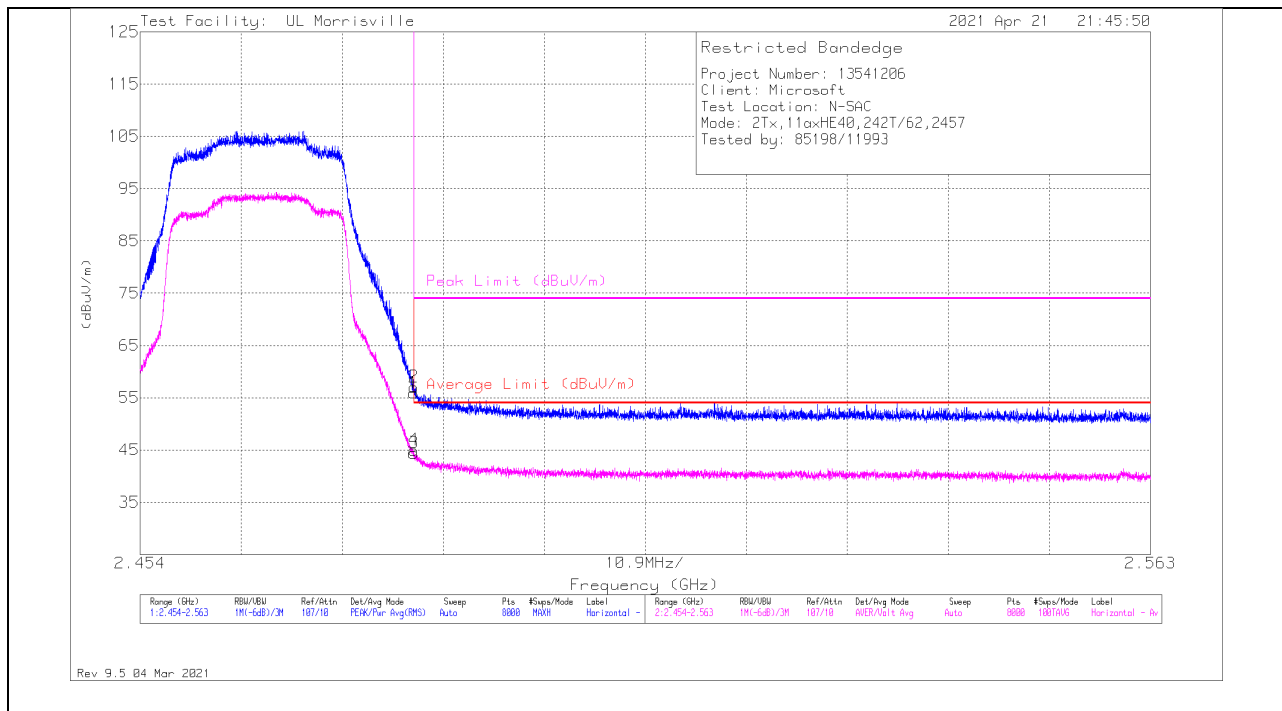

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	37.81	Pk	32.4	-24.3	10	0	55.91	-	-	74	-18.09	37	284	H
2	*** 2.48352	38.96	Pk	32.4	-24.3	10	0	57.06	-	-	74	-16.94	37	284	H
3	*** 2.4835	26.02	ADV	32.4	-24.3	10	.31	44.43	54	-9.57	-	-	37	284	H
4	*** 2.48353	26.58	ADV	32.4	-24.3	10	.31	44.99	54	-9.01	-	-	37	284	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

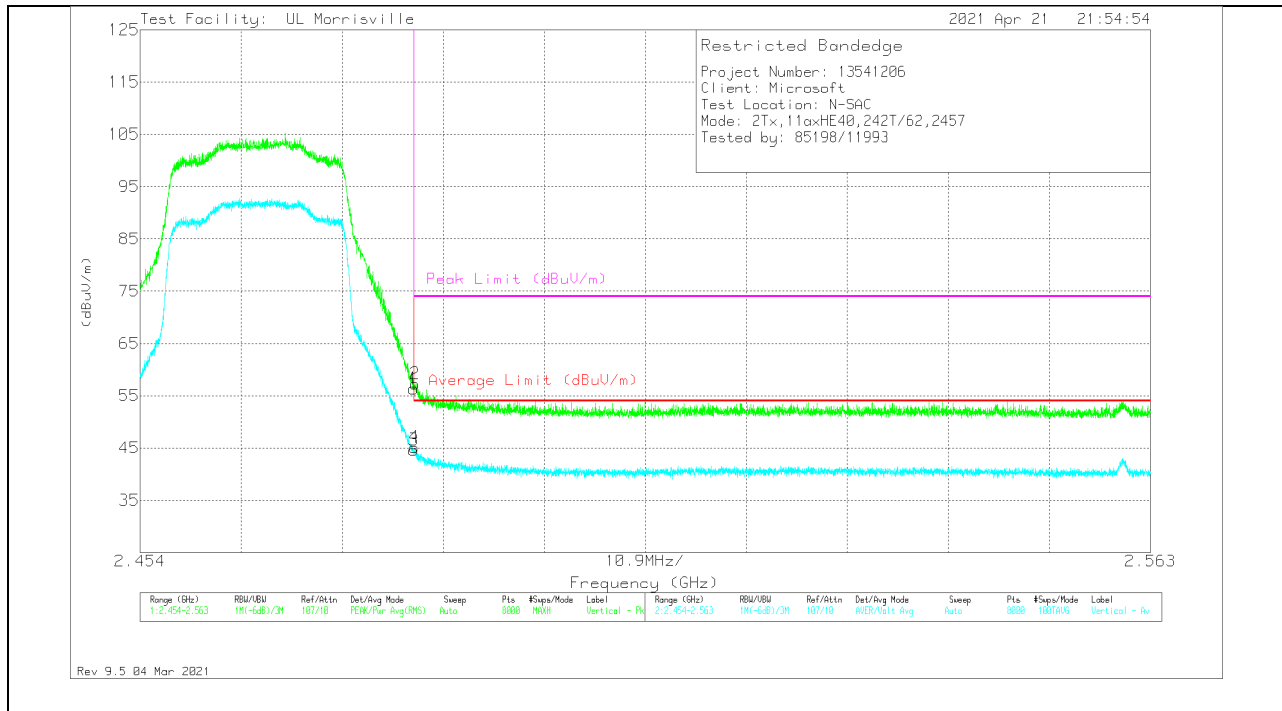


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	38.26	Pk	32.4	-24.3	10	0	56.36	-	-	74	-17.64	218	312	V
2	*** 2.48368	39.17	Pk	32.4	-24.3	10	0	57.27	-	-	74	-16.73	218	312	V
3	*** 2.4835	26.19	ADV	32.4	-24.3	10	.31	44.6	54	-9.4	-	-	218	312	V
4	*** 2.48358	26.71	ADV	32.4	-24.3	10	.31	45.12	54	-8.88	-	-	218	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 11)

HORIZONTAL RESULT

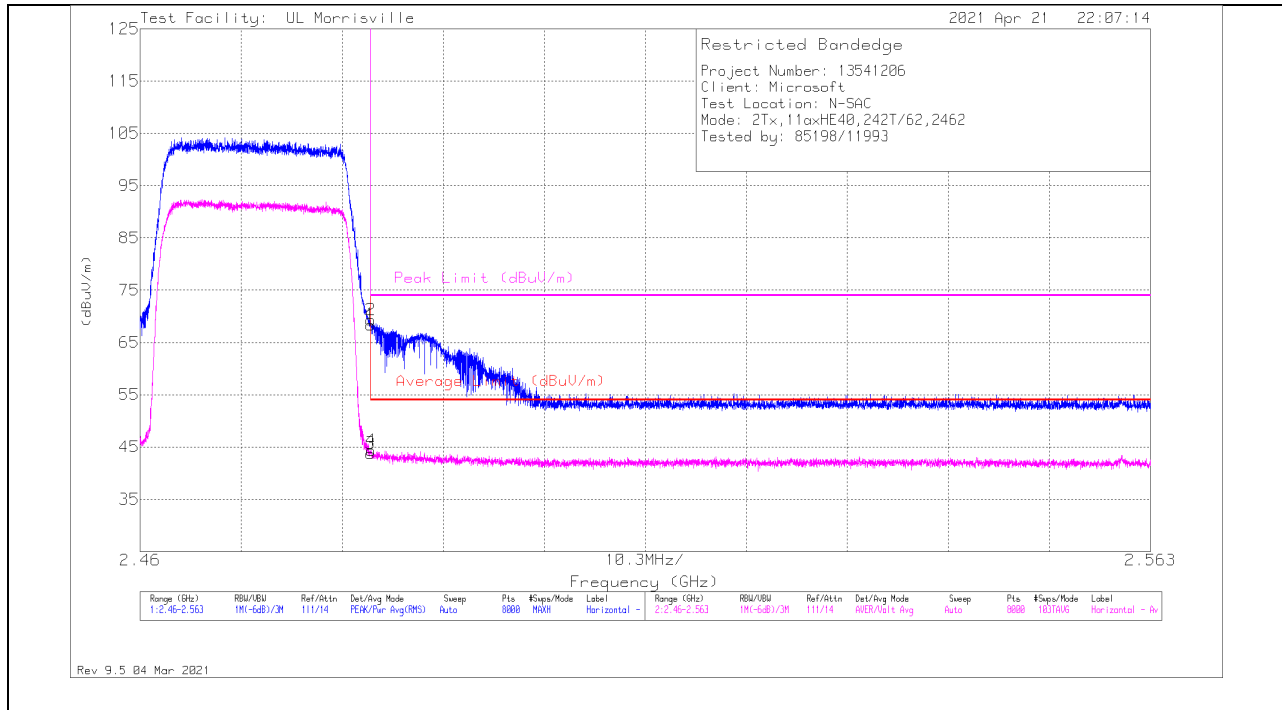

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	50.27	Pk	32.4	-24.3	10	0	68.37	-	-	74	-5.63	30	145	H
2	* ** 2.48351	51.19	Pk	32.4	-24.3	10	0	69.29	-	-	74	-4.71	30	145	H
3	* ** 2.4835	25.34	ADV	32.4	-24.3	10	.31	43.75	54	-10.25	-	-	30	145	H
4	* ** 2.48353	25.92	ADV	32.4	-24.3	10	.31	44.33	54	-9.67	-	-	30	145	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

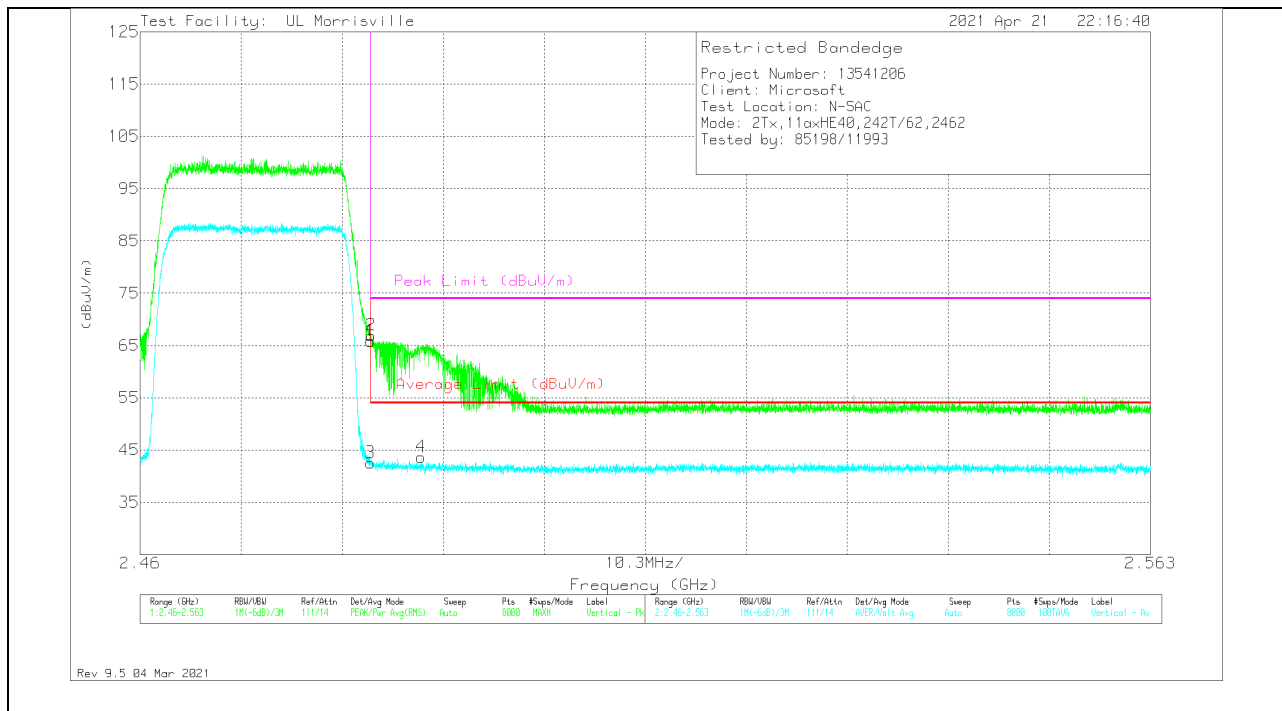


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	47.77	Pk	32.4	-24.3	10	0	65.87	-	-	74	-8.13	77	276	V
2	* ** 2.48353	48.84	Pk	32.4	-24.3	10	0	66.94	-	-	74	-7.06	77	276	V
3	* ** 2.4835	24.12	ADV	32.4	-24.3	10	.31	42.53	54	-11.47	-	-	77	276	V
4	* ** 2.48864	25.15	ADV	32.5	-24.3	10	.31	43.66	54	-10.34	-	-	77	276	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (LOW CHANNEL 3)

HORIZONTAL RESULT

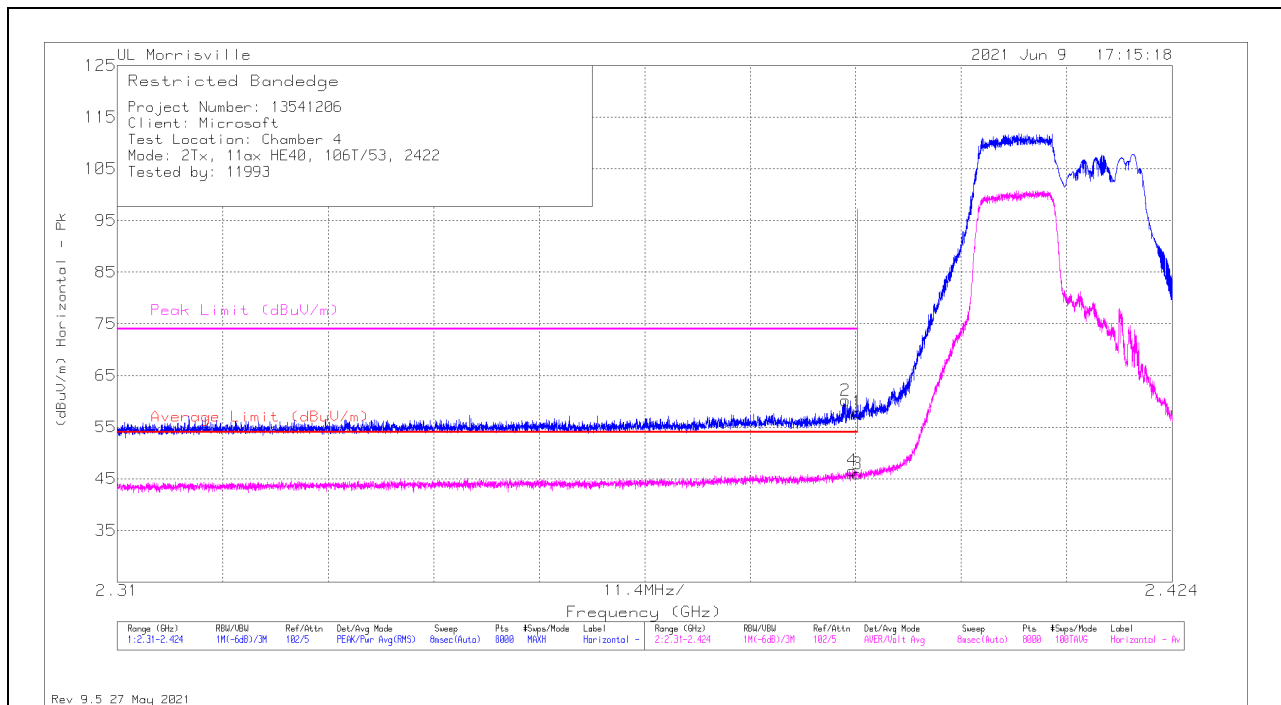

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	29.71	Pk	32	-13.8	10	0	57.91	-	-	74	-16.09	84	103	H
2	** 2.38867	31.95	Pk	32	-13.8	10	0	60.15	-	-	74	-13.85	84	103	H
3	** 2.39	17.44	ADV	32	-13.8	10	.31	45.95	54	-8.05	-	-	84	103	H
4	*** 2.38941	18.08	ADV	32	-13.8	10	.31	46.59	54	-7.41	-	-	84	103	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

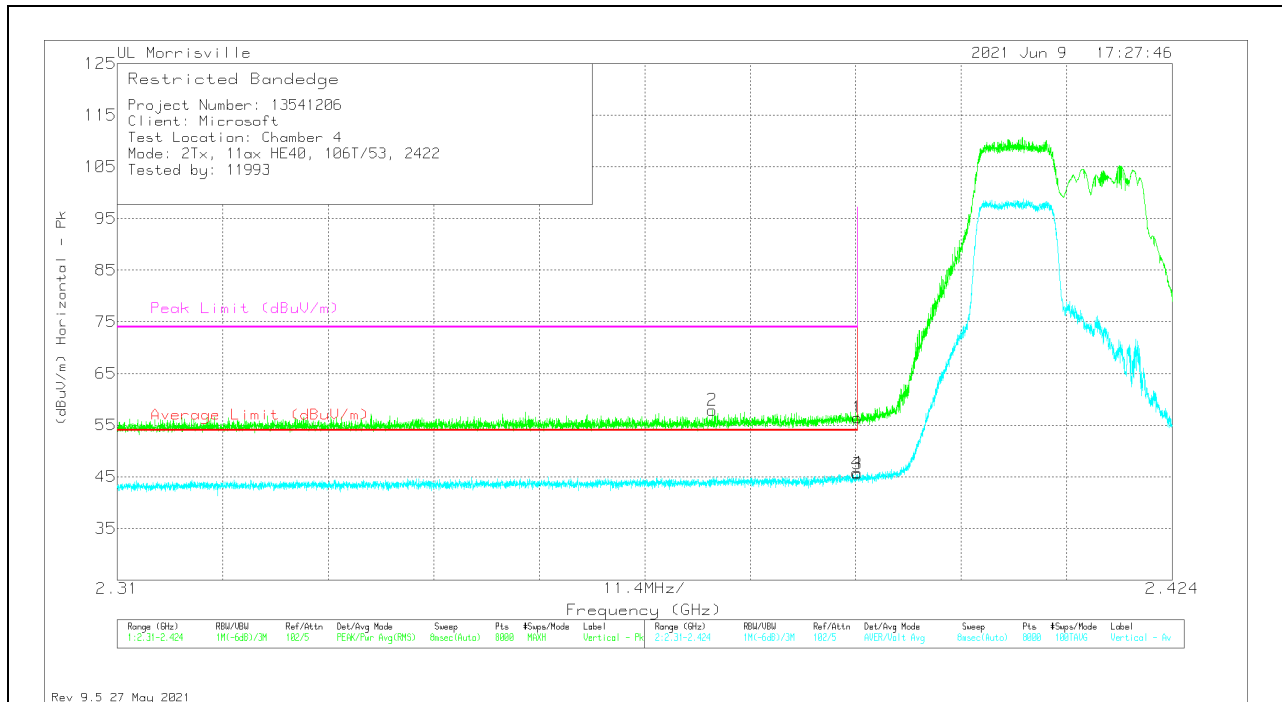


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	28.26	Pk	32	-13.8	10	0	56.46	-	-	74	-17.54	297	278	V
2	* ** 2.37431	29.79	Pk	32	-13.9	10	0	57.89	-	-	74	-16.11	297	278	V
3	* ** 2.39	17.04	ADV	32	-13.8	10	.31	45.55	54	-8.45	-	-	297	278	V
4	* ** 2.38994	17.29	ADV	32	-13.8	10	.31	45.8	54	-8.2	-	-	297	278	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average


2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 54

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL 3 RESULTS

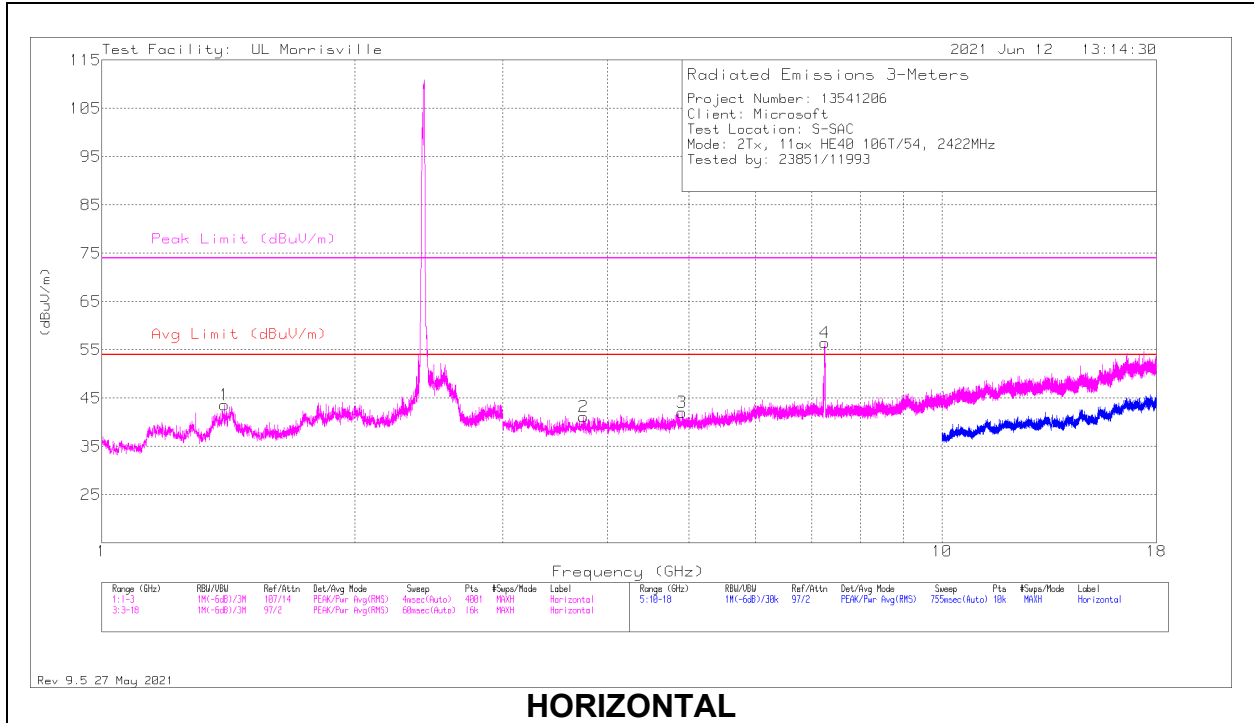

HORIZONTAL

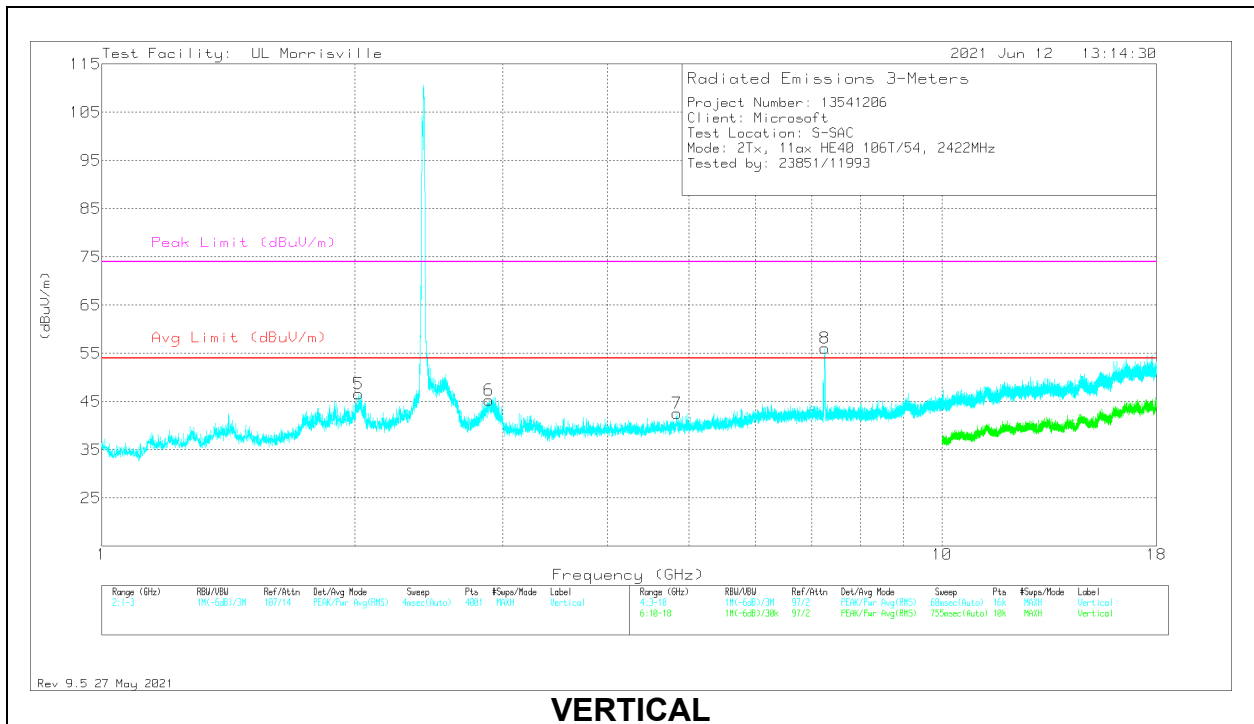

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.399	37.53	Pk	28.9	-22.8	0	43.63	54	-10.37	74	-30.37	0-360	199	H
5	** 2.021	38.26	Pk	31	-22.7	0	46.56	54	-7.44	74	-27.44	0-360	199	V
6	*** 2.889	38.48	Pk	32.7	-25.9	0	45.28	54	-8.72	74	-28.72	0-360	199	V
2	*** 3.7425	40.54	Pk	33.4	-32.8	0	41.14	54	-12.86	74	-32.86	0-360	101	H
3	*** 4.90594	38.94	Pk	34.1	-31	0	42.04	54	-11.96	74	-31.96	0-360	101	H
4	*** 7.25373	52.72	PK2	35.5	-27.6	0	60.62	-	-	74	-13.38	318	155	H
	*** 7.25152	37.37	ADV	35.5	-27.6	.31	45.58	54	-8.42	-	-	318	155	H
7	*** 4.83563	39.29	Pk	34.2	-30.9	0	42.59	54	-11.41	74	-31.41	0-360	101	V
8	*** 7.25305	46.8	PK2	35.5	-27.6	0	54.7	-	-	74	-19.3	15	103	V
	*** 7.25164	32.9	ADV	35.5	-27.6	.31	41.11	54	-12.89	-	-	15	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL 6 RESULTS

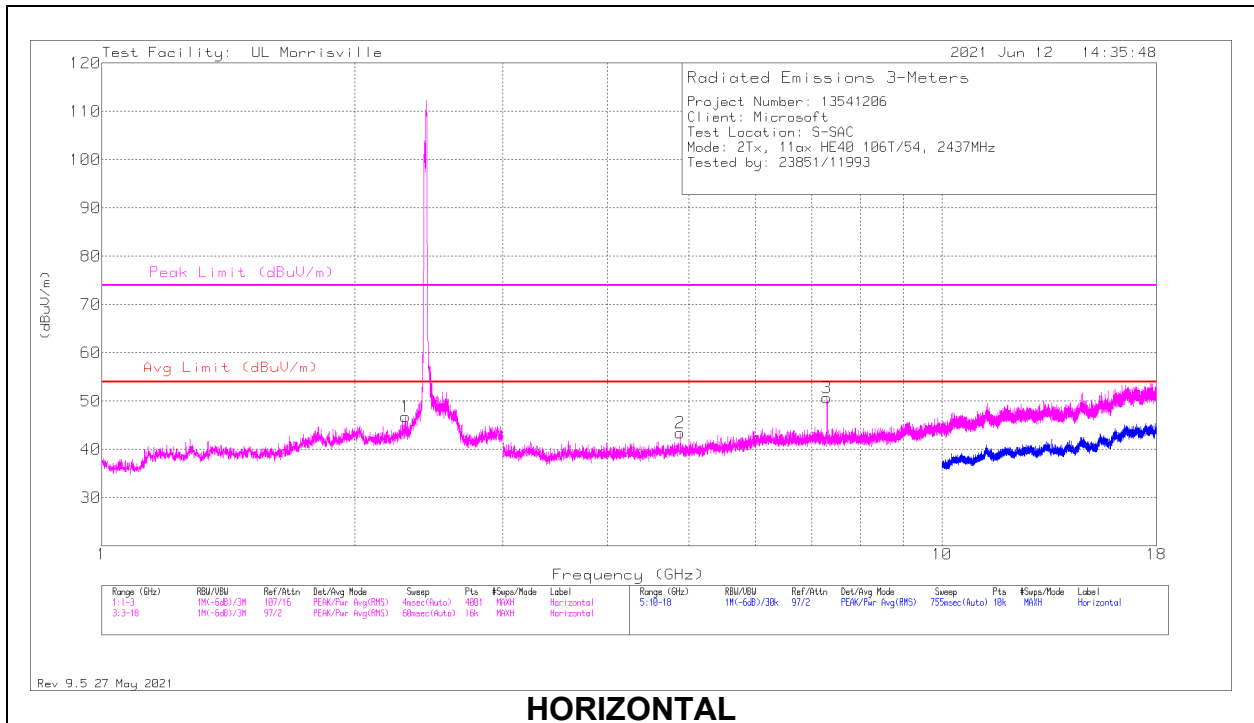

HORIZONTAL

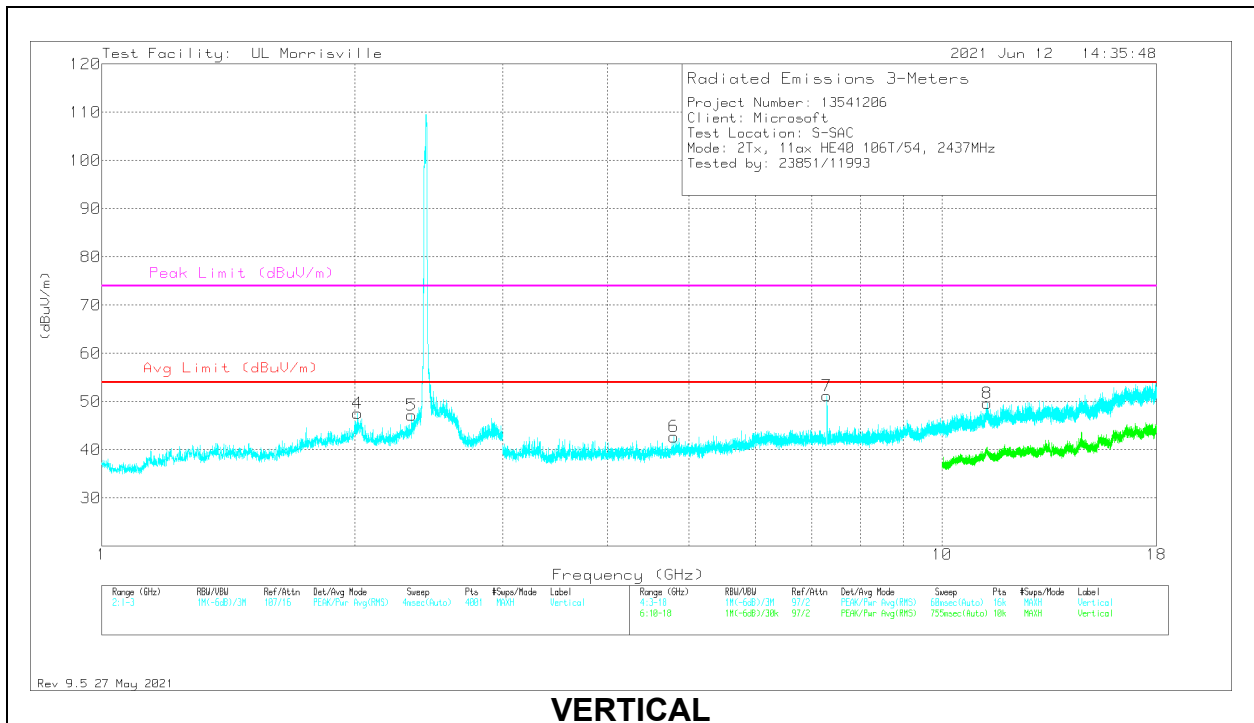


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.299	38.43	Pk	31.9	-23.5	0	46.83	54	-7.17	74	-27.17	0-360	101	H
4	** 2.0165	39.31	Pk	30.9	-22.6	0	47.61	54	-6.39	74	-26.39	0-360	199	V
5	*** 2.3375	39.14	Pk	31.9	-23.8	0	47.24	54	-6.76	74	-26.76	0-360	199	V
2	*** 4.88063	40.05	Pk	34.2	-30.8	0	43.45	54	-10.55	74	-30.55	0-360	199	H
3	*** 7.29801	50.35	PK2	35.7	-27.5	0	58.55	-	-	74	-15.45	317	138	H
	*** 7.29752	36.07	ADV	35.7	-27.5	.31	44.58	54	-9.42	-	-	317	138	H
6	*** 4.79906	39.42	Pk	34.1	-30.8	0	42.72	54	-11.28	74	-31.28	0-360	101	V
7	*** 7.29616	48.13	PK2	35.7	-27.5	0	56.33	-	-	74	-17.67	157	196	V
	*** 7.29702	33.93	ADV	35.7	-27.5	.31	42.44	54	-11.56	-	-	157	196	V
8	* ** 11.31216	35.37	PK2	38	-23	0	50.37	-	-	74	-23.63	201	363	V
	* ** 11.31442	22.5	ADV	38	-23	.31	37.81	54	-16.19	-	-	201	363	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK2 - Maximum Peak
 ADV - Linear Voltage Average

HIGH CHANNEL 11 RESULTS

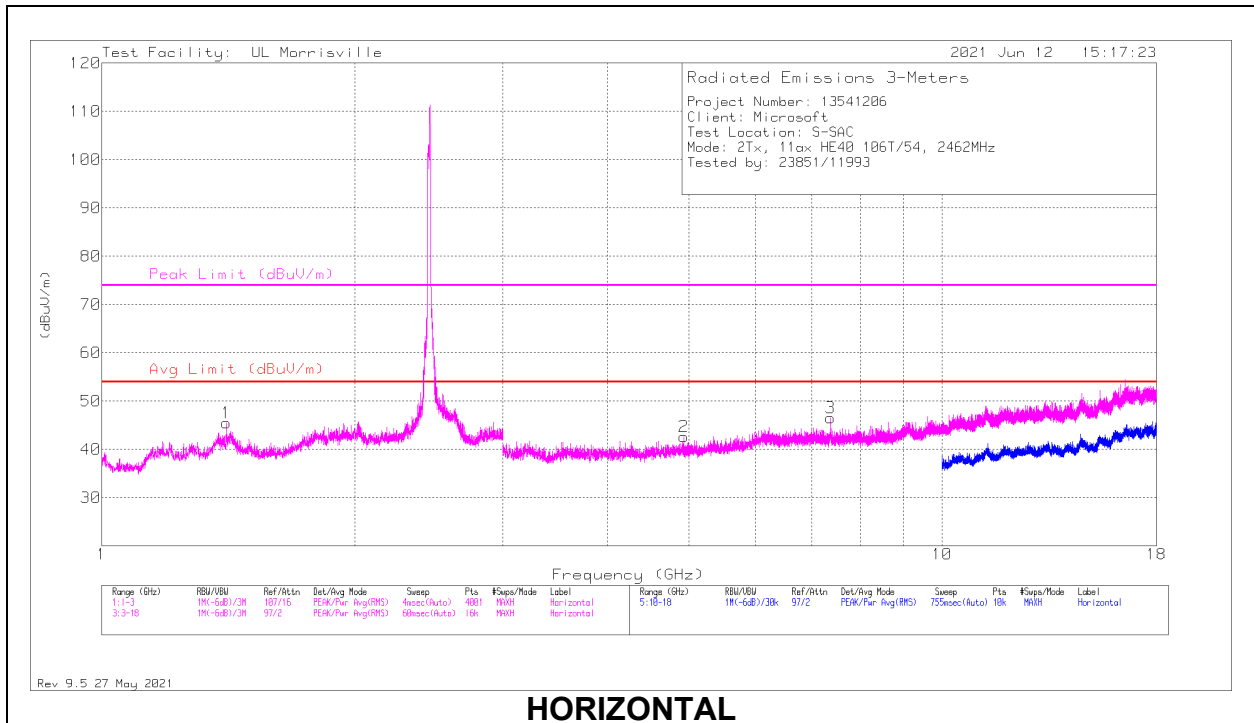

HORIZONTAL

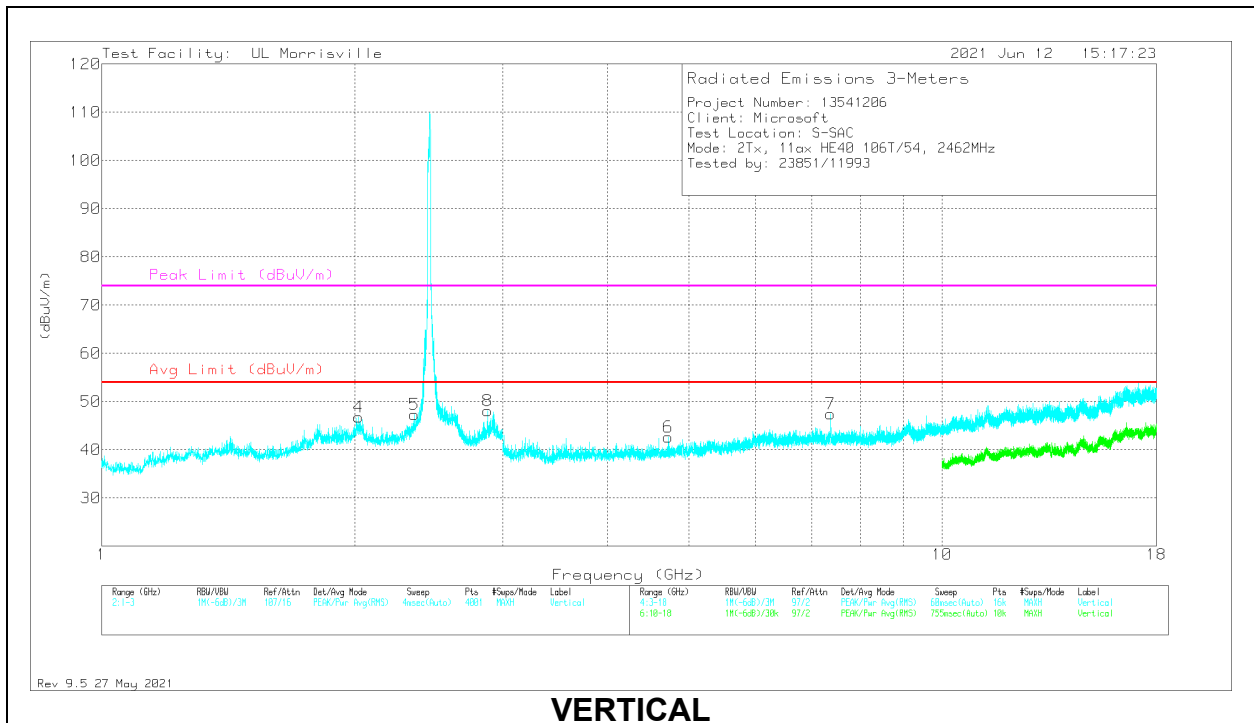

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.4065	39.43	Pk	28.8	-22.7	0	45.53	54	-8.47	74	-28.47	0-360	101	H
4	** 2.0215	38.39	Pk	31.1	-22.7	0	46.79	54	-7.21	74	-27.21	0-360	200	V
5	*** 2.354	38.92	Pk	32.2	-23.8	0	47.32	54	-6.68	74	-26.68	0-360	200	V
8	*** 2.87951	42.65	PK2	32.6	-25.8	0	49.45	-	-	74	-24.55	110	187	V
	*** 2.8779	29.72	ADV	32.6	-25.8	.31	36.83	54	-17.17	-	-	110	187	V
2	*** 4.92844	39.53	Pk	34	-30.9	0	42.63	54	-11.37	74	-31.37	0-360	101	H
3	*** 7.36969	38.29	Pk	35.7	-27.4	0	46.59	54	-7.41	74	-27.41	0-360	101	H
6	*** 4.725	40.25	Pk	34.1	-31.7	0	42.65	54	-11.35	74	-31.35	0-360	101	V
7	*** 7.36875	39.13	Pk	35.7	-27.4	0	47.43	54	-6.57	74	-26.57	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 56

BANDEDGE (HIGH CHANNEL 9)

HORIZONTAL RESULT

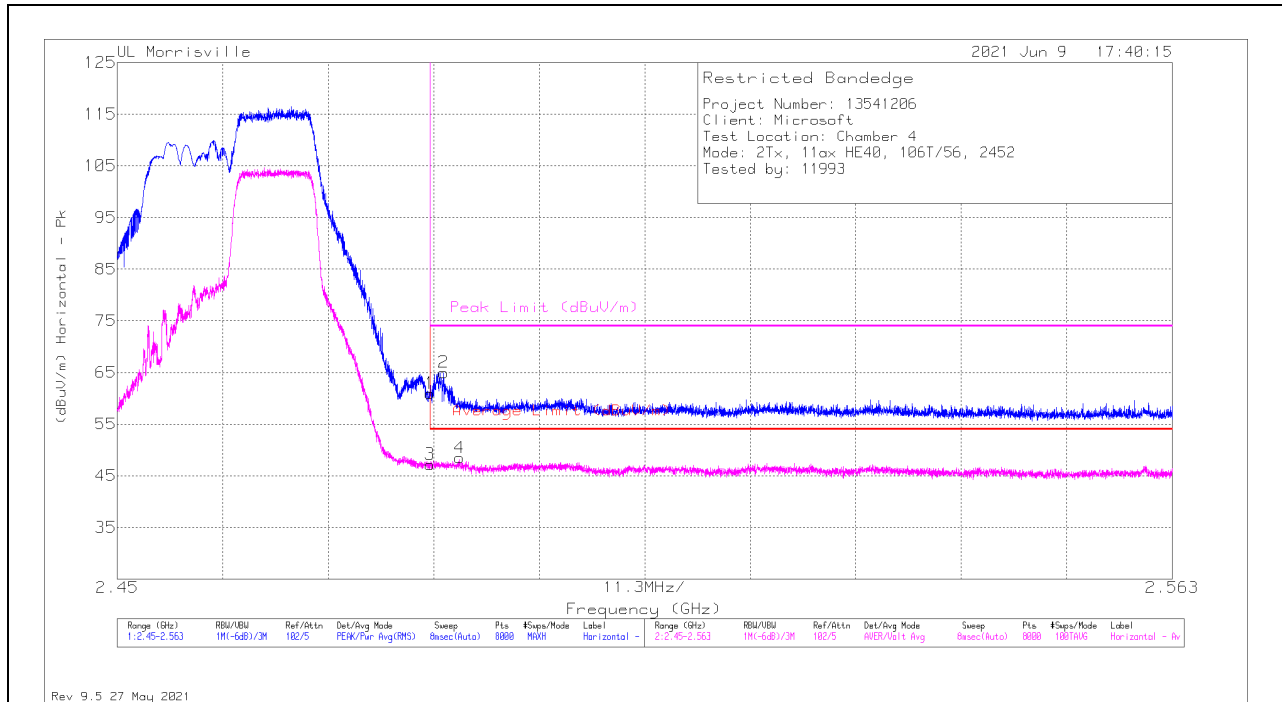

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.48351	32.06	Pk	32.6	-13.7	10	0	60.96	-	-	74	-13.04	325	128	H
2	*** 2.48495	36.09	Pk	32.6	-13.7	10	0	64.99	-	-	74	-9.01	325	128	H
3	** 2.48351	17.99	ADV	32.6	-13.7	10	.31	47.2	54	-6.8	-	-	325	128	H
4	*** 2.48666	19.26	ADV	32.6	-13.7	10	.31	48.47	54	-5.53	-	-	325	128	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

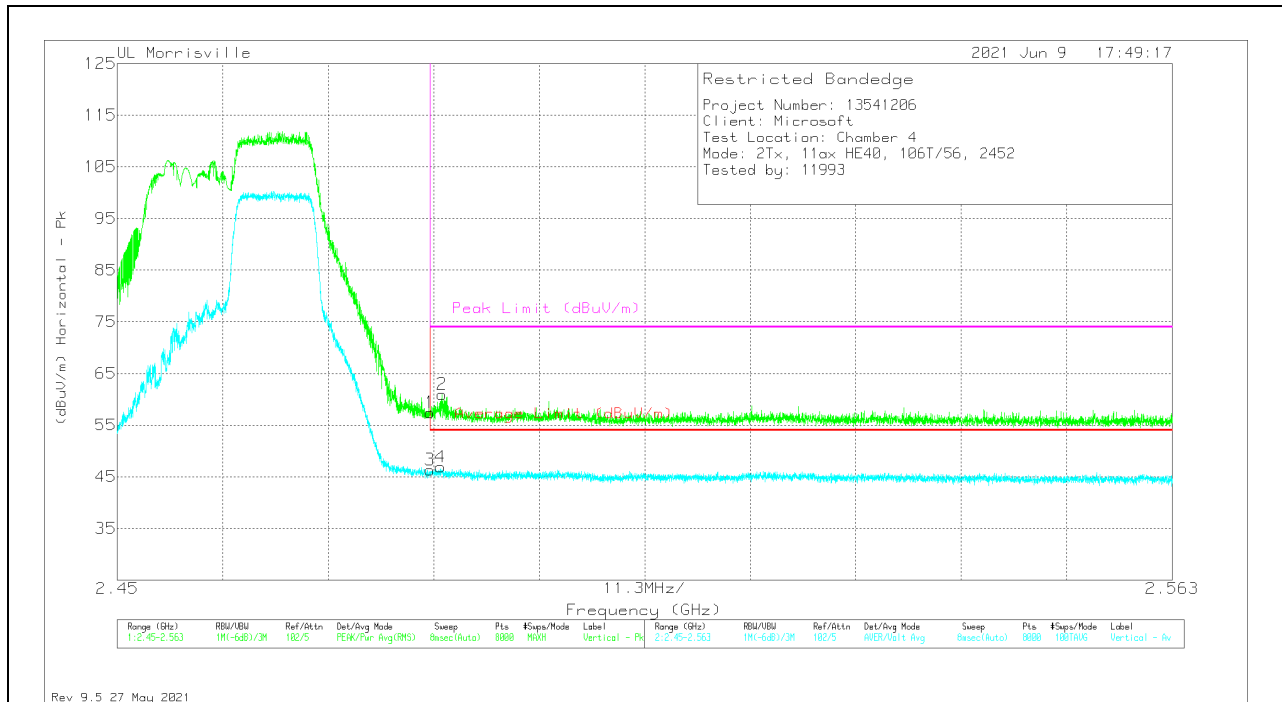

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.48351	28.53	Pk	32.6	-13.7	10	0	57.43	-	-	74	-16.57	268	227	V
2	** 2.48477	32.05	Pk	32.6	-13.7	10	0	60.95	-	-	74	-13.05	268	227	V
3	*** 2.48351	17.13	ADV	32.6	-13.7	10	.31	46.34	54	-7.66	-	-	268	227	V
4	*** 2.48463	17.67	ADV	32.6	-13.7	10	.31	46.88	54	-7.12	-	-	268	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEGE (HIGH CHANNEL 10)


HORIZONTAL RESULT

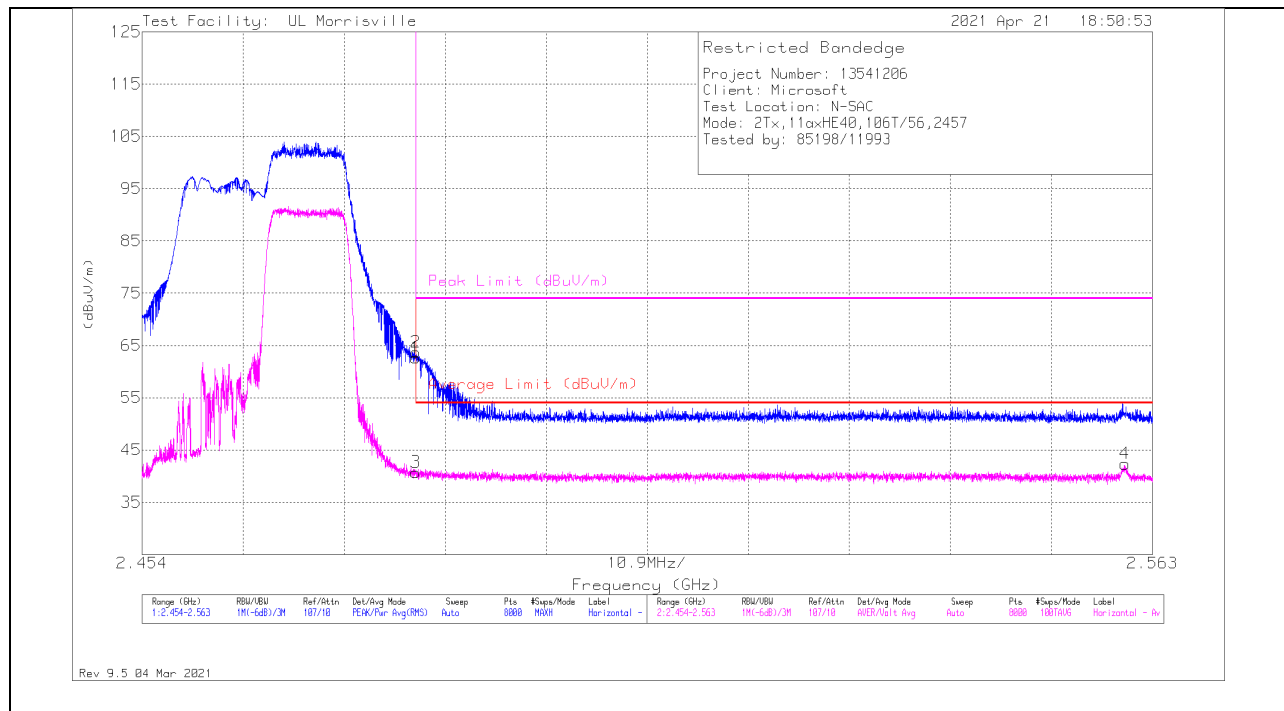

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	44.5	Pk	32.4	-24.3	10	0	62.6	-	-	74	-11.4	353	130	H
2	*** 2.48352	45.6	Pk	32.4	-24.3	10	0	63.7	-	-	74	-10.3	353	130	H
3	** 2.4835	22.33	ADV	32.4	-24.3	10	.31	40.74	54	-13.26	-	-	353	130	H
4	** 2.56003	24.05	ADV	32.3	-24.3	10	.31	42.36	54	-11.64	-	-	353	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

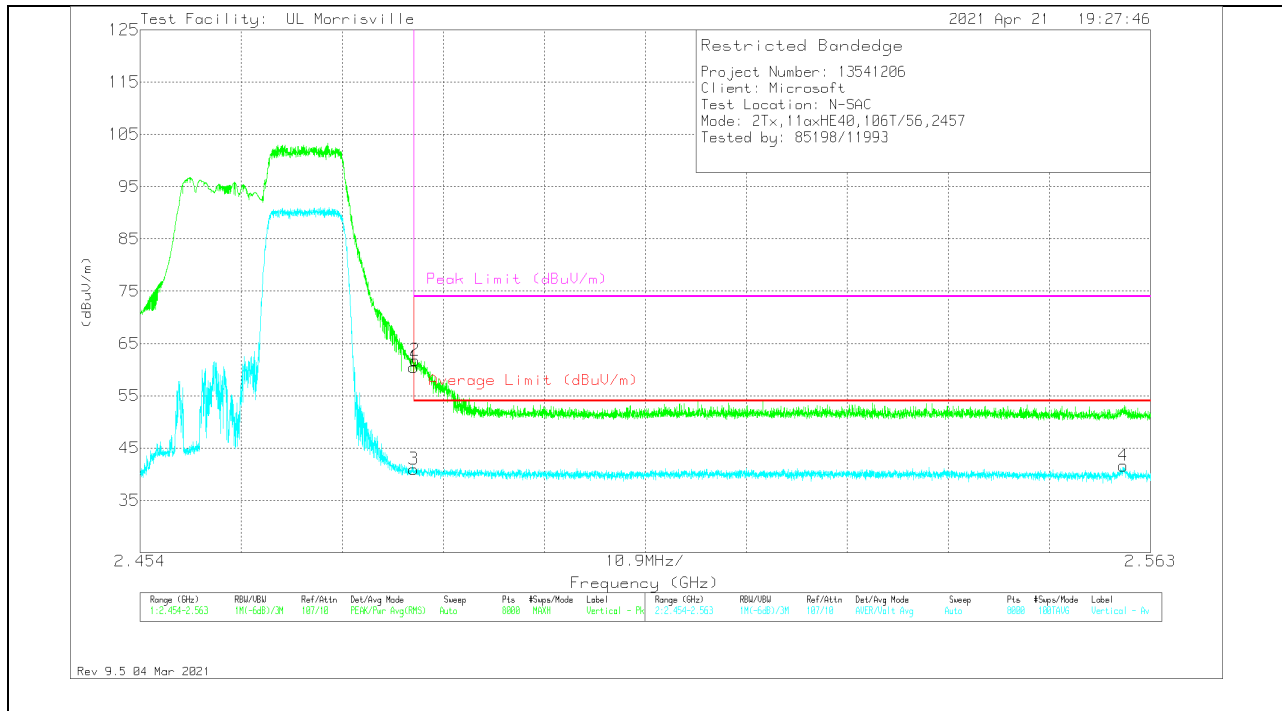


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	42.35	Pk	32.4	-24.3	10	0	60.45	-	-	74	-13.55	49	266	V
2	*** 2.48368	43.7	Pk	32.4	-24.3	10	0	61.8	-	-	74	-12.2	49	266	V
3	*** 2.4835	22.57	ADV	32.4	-24.3	10	.31	40.98	54	-13.02	-	-	49	266	V
4	** 2.56007	23.32	ADV	32.3	-24.3	10	.31	41.63	54	-12.37	-	-	49	266	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 11)


HORIZONTAL RESULT

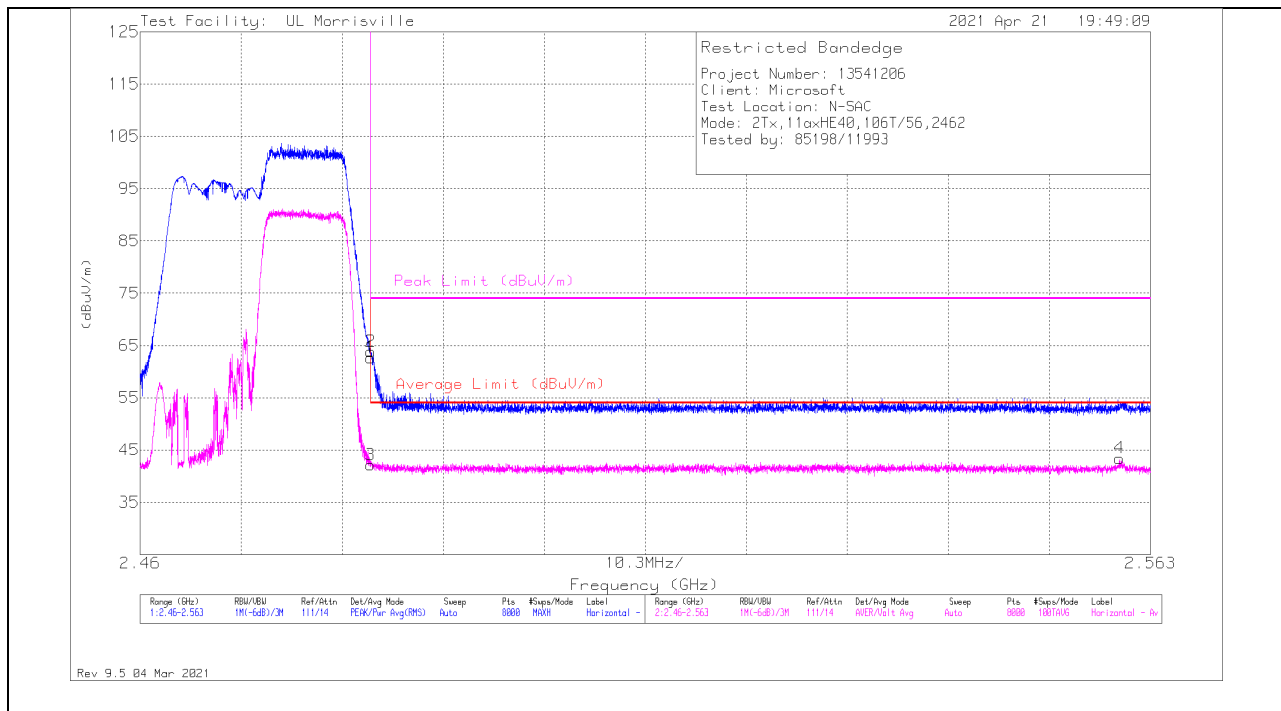

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	44.59	Pk	32.4	-24.3	10	0	62.69	-	-	74	-11.31	30	130	H
2	* ** 2.48351	45.74	Pk	32.4	-24.3	10	0	63.84	-	-	74	-10.16	30	130	H
3	* ** 2.4835	23.72	ADV	32.4	-24.3	10	.31	42.13	54	-11.87	-	-	30	130	H
4	** 2.55984	25.13	ADV	32.3	-24.3	10	.31	43.44	54	-10.56	-	-	30	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

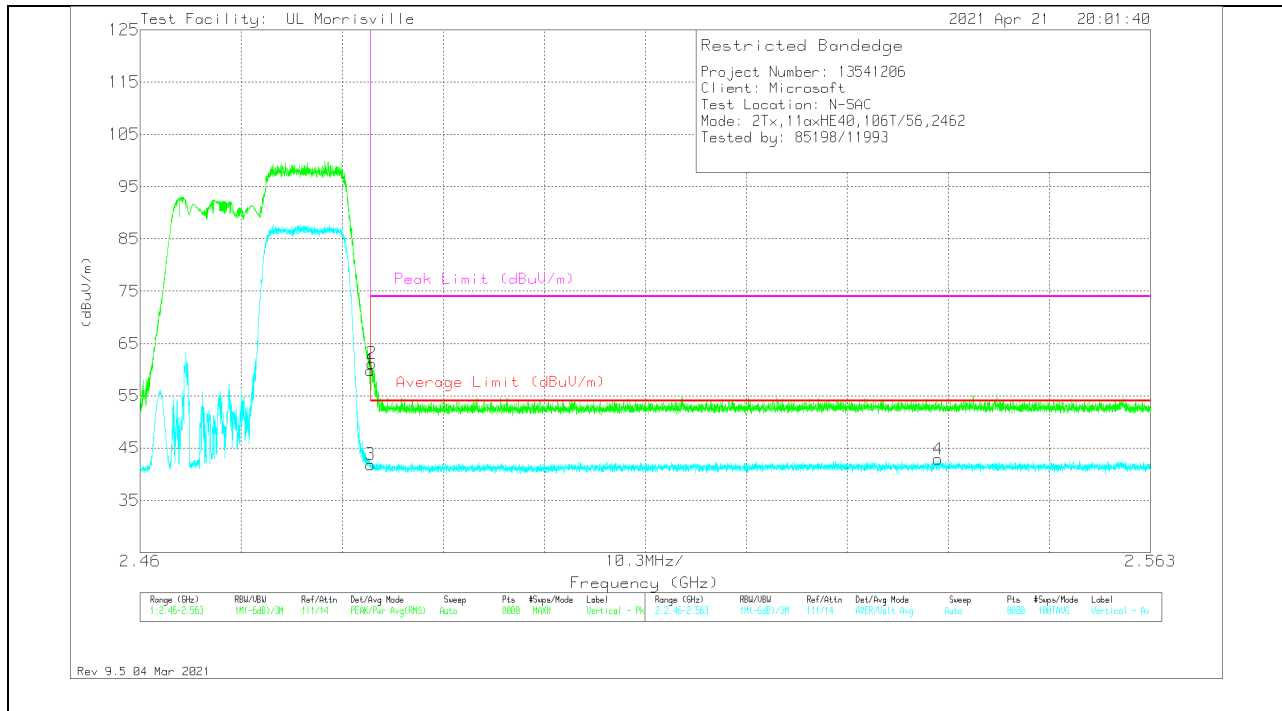


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	41.78	Pk	32.4	-24.3	10	0	59.88	-	-	74	-14.12	52	320	V
2	*** 2.48363	43.07	Pk	32.4	-24.3	10	0	61.17	-	-	74	-12.83	52	320	V
3	*** 2.4835	23.43	ADV	32.4	-24.3	10	.31	41.84	54	-12.16	-	-	52	320	V
4	** 2.54134	24.27	ADV	32.5	-24.2	10	.31	42.88	54	-11.12	-	-	52	320	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 37

BANDEDGE (LOW CHANNEL 3)


HORIZONTAL RESULT

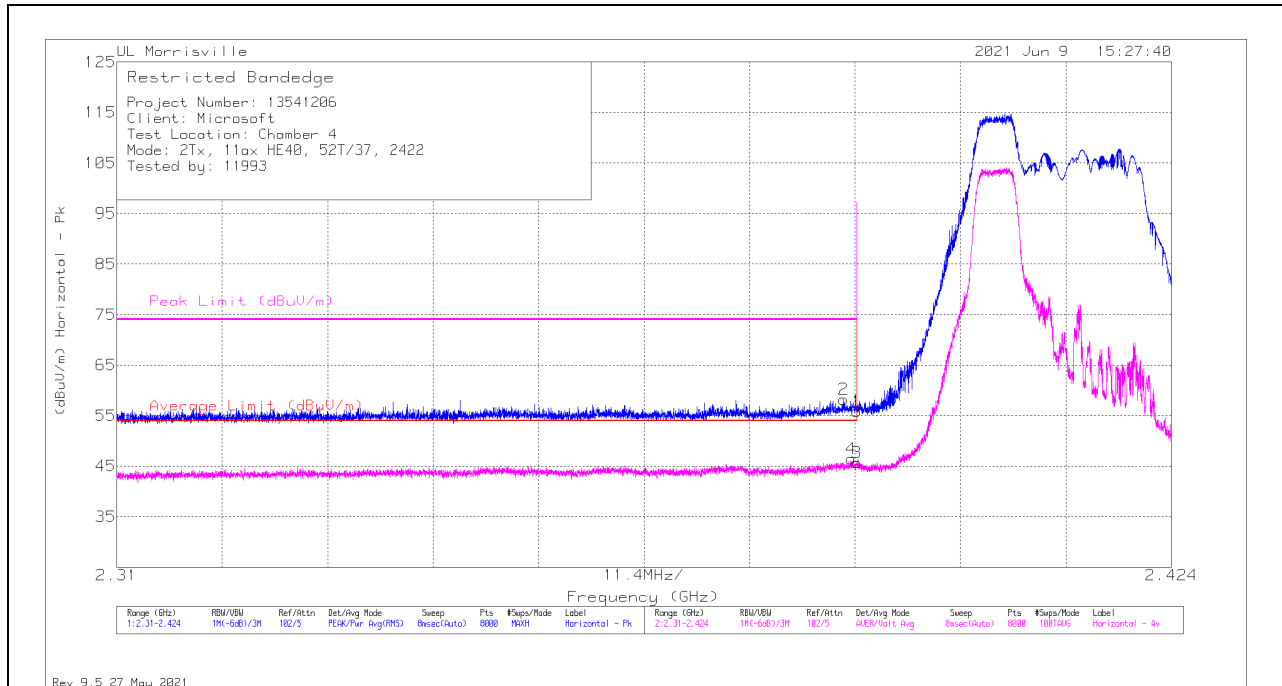

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.39	27.73	Pk	32	-13.8	10	0	55.93	-	-	74	-18.07	317	103	H
2	*** 2.38857	30.05	Pk	32	-13.8	10	0	58.25	-	-	74	-15.75	317	103	H
3	*** 2.39	17.15	ADV	32	-13.8	10	.32	45.67	54	-8.34	-	-	317	103	H
4	*** 2.38936	17.91	ADV	32	-13.8	10	.32	46.43	54	-7.58	-	-	317	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

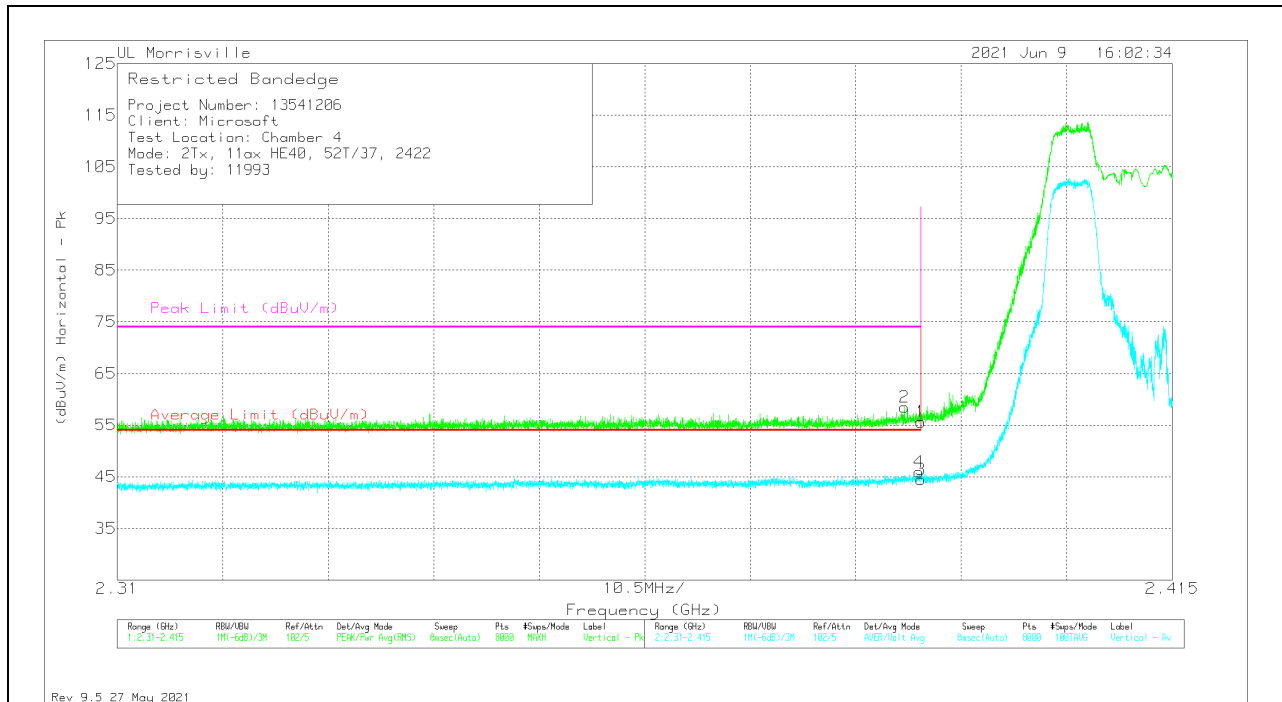


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	27.44	Pk	32	-13.8	10	0	55.64	-	-	74	-18.36	120	308	V
2	* ** 2.38836	30.26	Pk	32	-13.8	10	0	58.46	-	-	74	-15.54	120	308	V
3	* ** 2.39	15.95	ADV	32	-13.8	10	.32	44.47	54	-9.53	-	-	120	308	V
4	* ** 2.3898	17.39	ADV	32	-13.8	10	.32	45.91	54	-8.09	-	-	120	308	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average


2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 40

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL 3 RESULTS

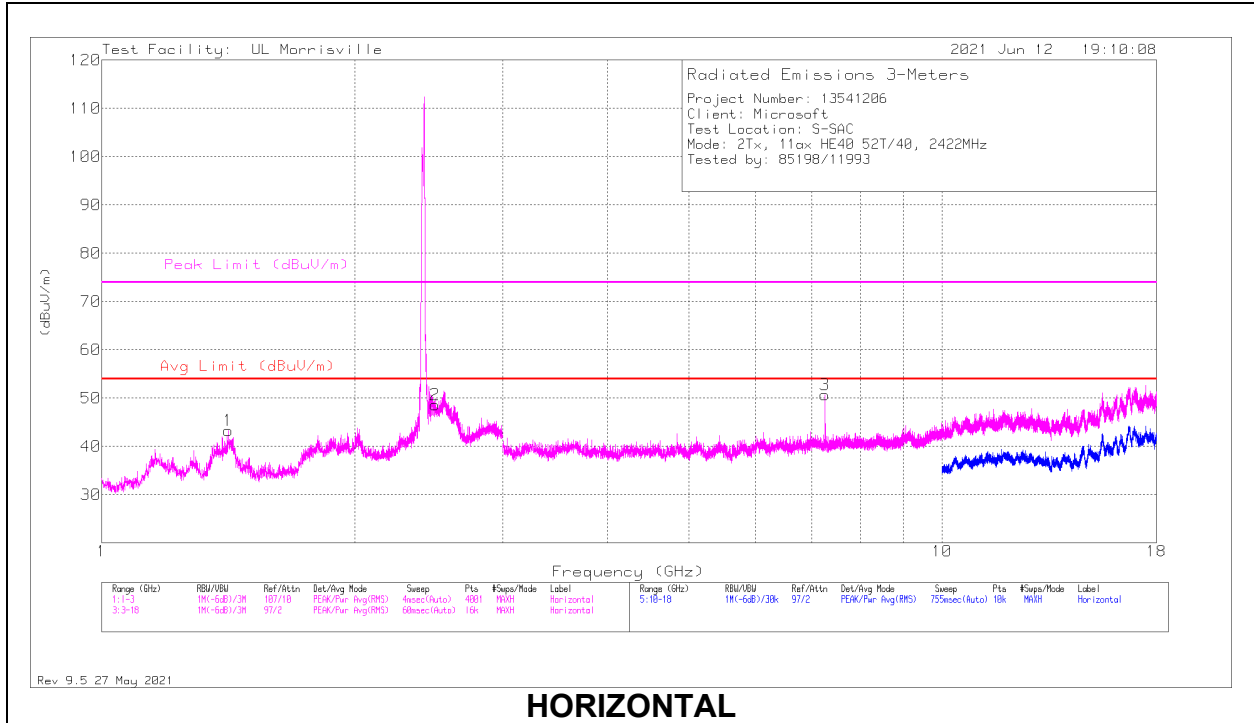

HORIZONTAL

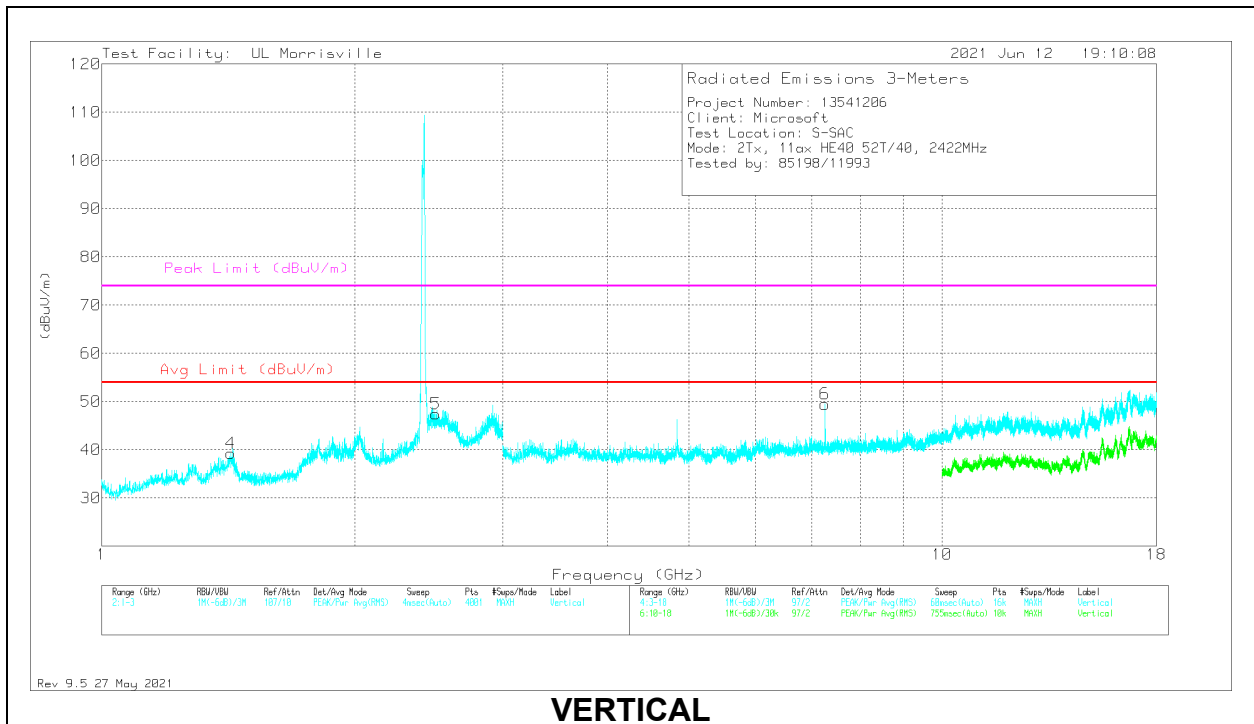

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.414	39.53	Pk	28.9	-25.1	0	43.33	54	-10.67	74	-30.67	0-360	200	H
2	*** 2.49489	45.21	PK2	32.5	-24.3	0	53.41	-	-	74	-20.59	336	127	H
	*** 2.49371	32.49	ADV	32.5	-24.3	.32	41.01	54	-12.99	-	-	336	127	H
4	*** 1.4235	35.62	Pk	28.8	-25.1	0	39.32	54	-14.68	74	-34.68	0-360	200	V
5	*** 2.4975	39.18	Pk	32.6	-24.3	0	47.48	54	-6.52	74	-26.52	0-360	200	V
3	*** 7.25654	49.35	PK2	35.7	-29.5	0	55.55	-	-	74	-18.45	107	148	H
	*** 7.25802	33.47	ADV	35.7	-29.4	.32	40.09	54	-13.91	-	-	107	148	H
6	*** 7.25892	43.17	PK2	35.7	-29.4	0	49.47	-	-	74	-24.53	74	226	V
	*** 7.25873	29.19	ADV	35.7	-29.4	.32	35.81	54	-18.19	-	-	74	226	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL 7 RESULTS

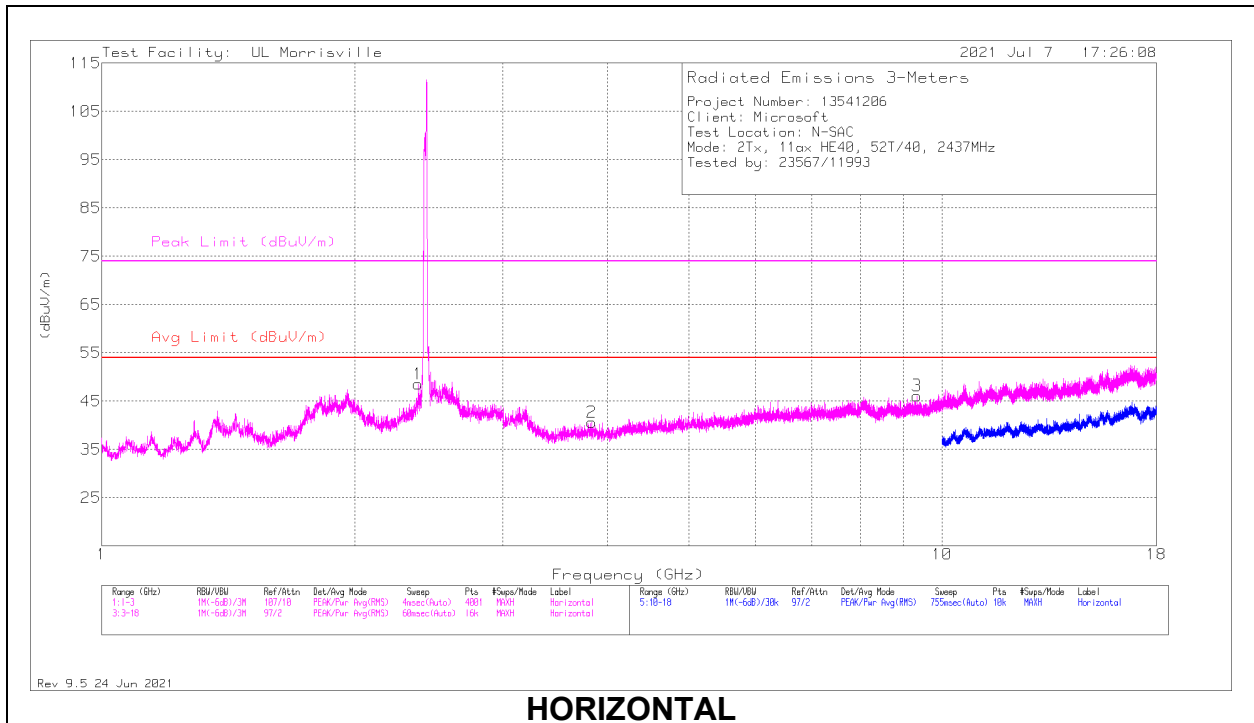

HORIZONTAL

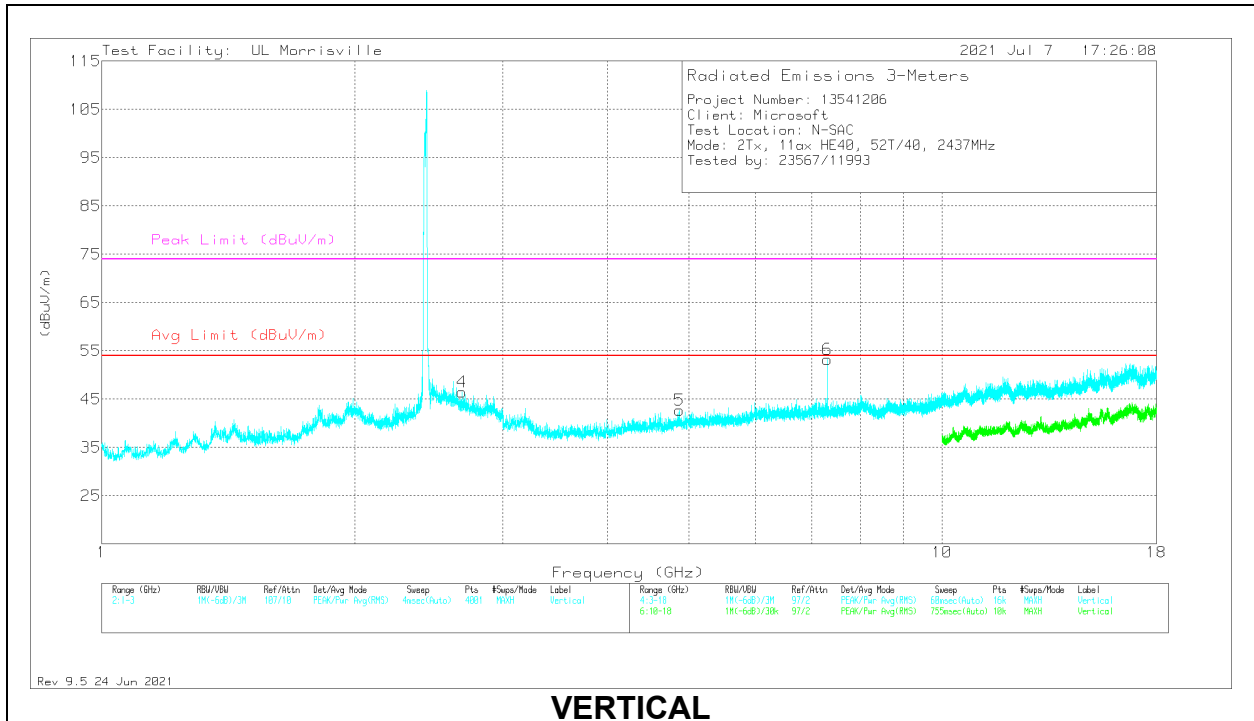

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38034	43.09	PK2	31.9	-24.4	0	50.59	-	-	74	-23.41	269	198	H
	*** 2.38082	30.15	ADV	31.9	-24.4	.31	37.96	54	-16.04	-	-	269	198	H
6	*** 7.30169	53.52	PK2	35.6	-29.2	0	59.92	-	-	74	-14.08	331	276	V
	*** 7.30397	38.21	ADV	35.6	-29.3	.31	44.82	54	-9.18	-	-	331	276	V
4	*** 2.6855	37.96	Pk	32.5	-24	0	46.46	54	-7.54	74	-27.54	0-360	101	V
2	*** 3.8325	39.79	Pk	33.4	-32.5	0	40.69	54	-13.31	74	-33.31	0-360	200	H
3	*** 9.33656	38.45	Pk	36.4	-28.7	0	46.15	54	-7.85	74	-27.85	0-360	101	H
5	*** 4.87125	39.73	Pk	34.2	-31.2	0	42.73	54	-11.27	74	-31.27	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL 11 RESULTS

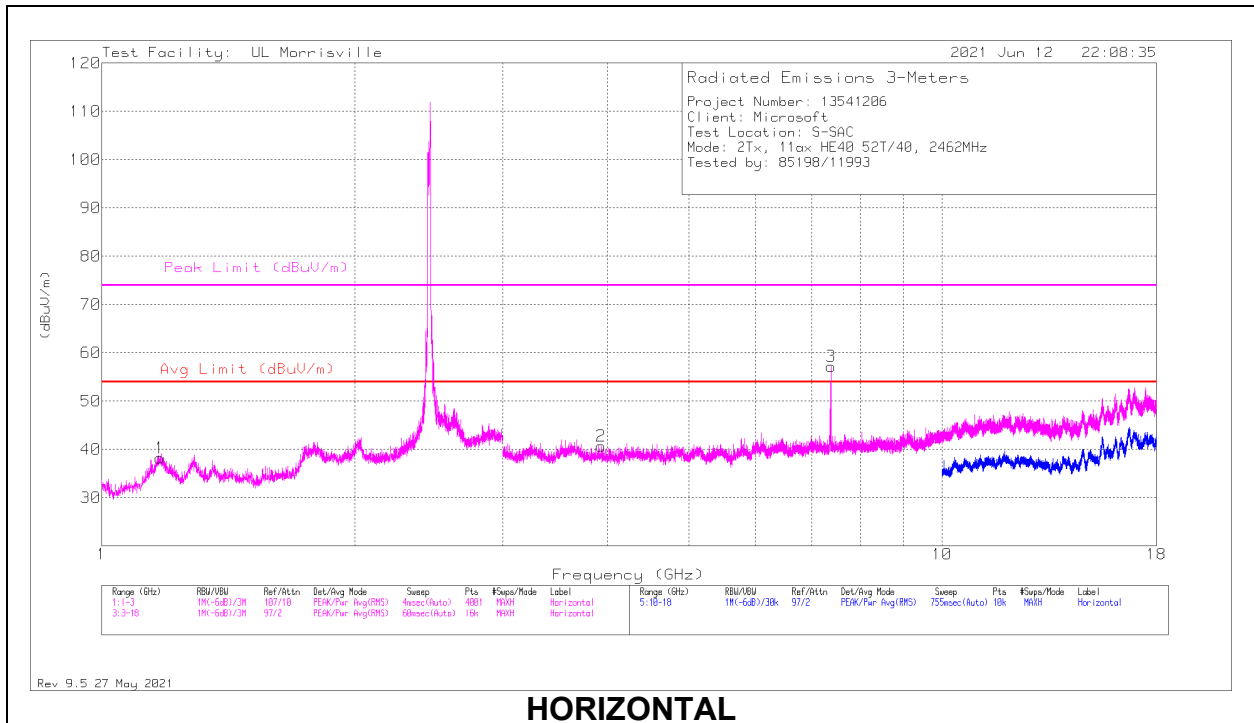

HORIZONTAL

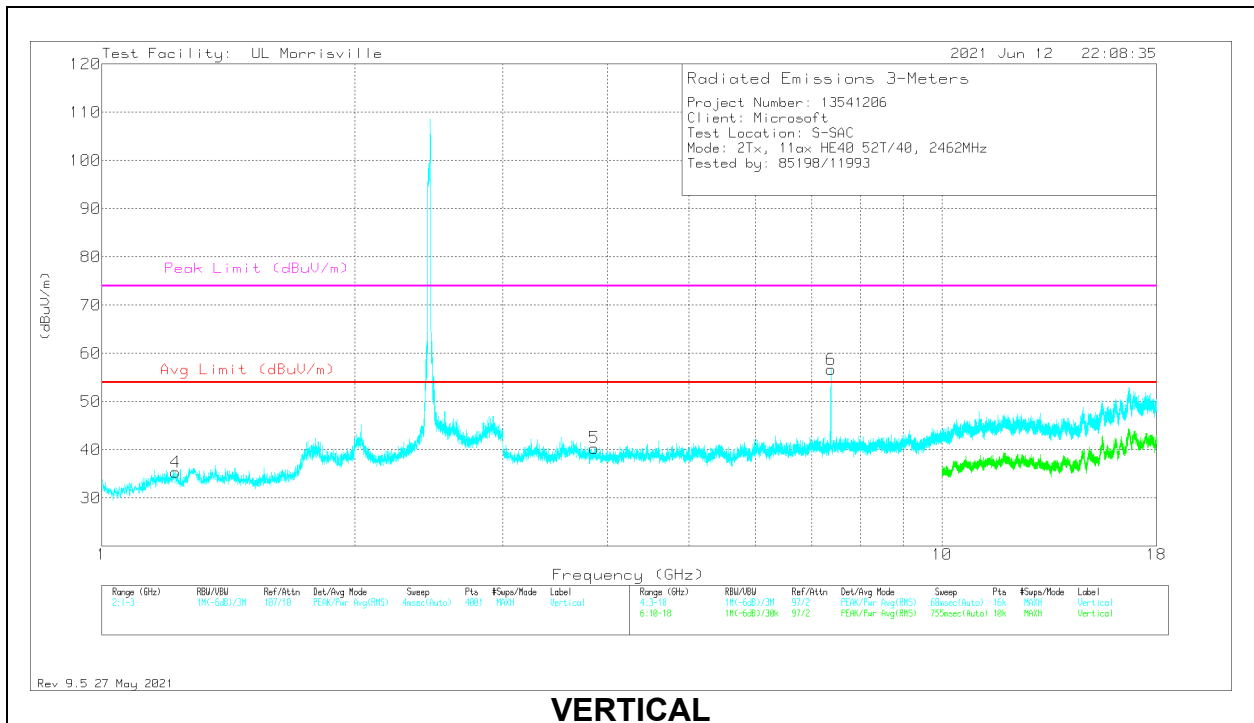

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.1725	36.11	Pk	28.3	-26.2	0	38.21	54	-15.79	74	-35.79	0-360	199	H
4	*** 1.2245	32.38	Pk	29	-26	0	35.38	54	-18.62	74	-38.62	0-360	199	V
2	*** 3.92906	39.31	Pk	33	-31.6	0	40.71	54	-13.29	74	-33.29	0-360	101	H
3	*** 7.37637	56.04	PK2	35.6	-29.3	0	62.34	-	-	74	-11.66	103	145	H
	*** 7.37775	36.96	ADV	35.6	-29.3	.32	43.58	54	-10.42	-	-	103	145	H
5	*** 3.855	39.28	Pk	33.3	-32.2	0	40.38	54	-13.62	74	-33.62	0-360	199	V
6	*** 7.37655	53.7	PK2	35.6	-29.3	0	60	-	-	74	-14	307	217	V
	*** 7.37682	35.36	ADV	35.6	-29.3	.32	41.98	54	-12.02	-	-	307	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADV - Linear Voltage Average