

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 61

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	19.22	19.22	28.20	-8.98

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	6.052	6.052	28.20	-22.15

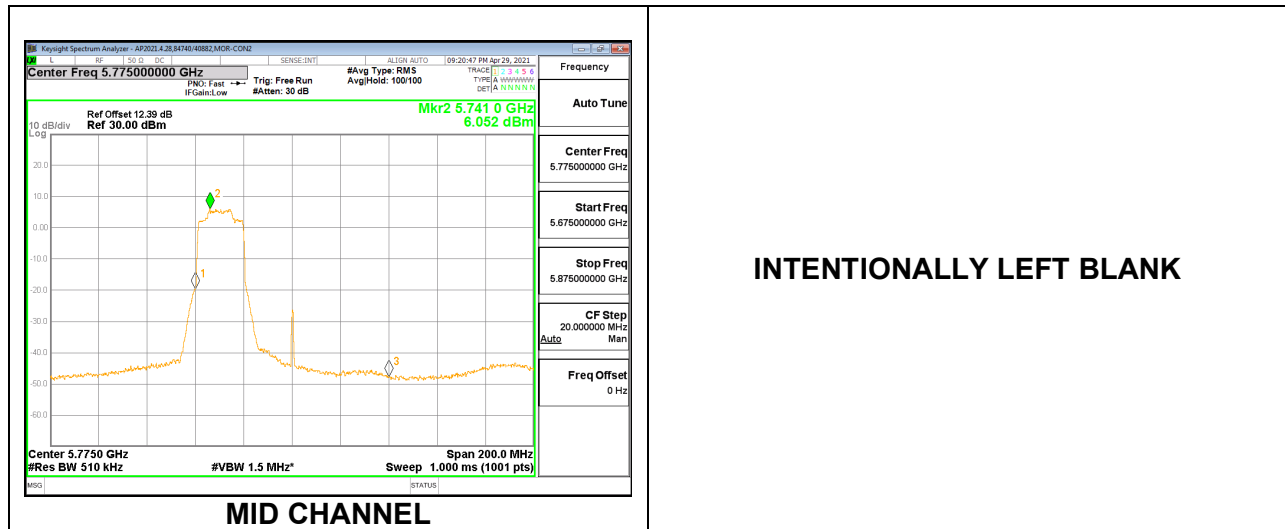

INTENTIONALLY LEFT BLANK

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 62

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	19.96	19.96	28.20	-8.24

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	6.142	6.142	28.20	-22.06

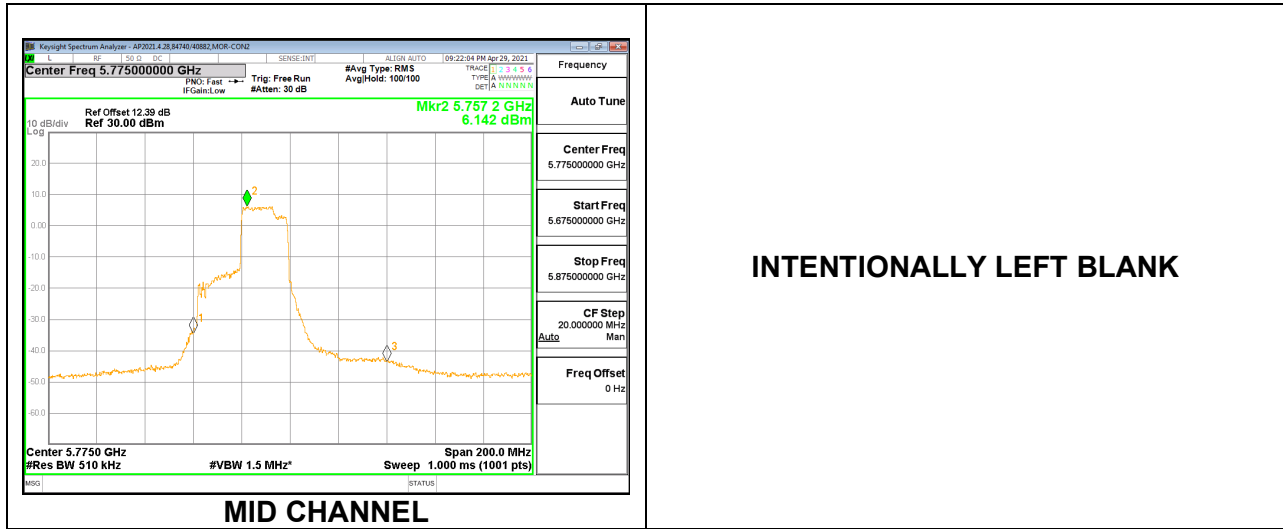

INTENTIONALLY LEFT BLANK

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 64

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20
138	5690	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	19.81	19.81	28.20	-8.39
138	5690	19.01	19.01	28.20	-9.19

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	6.557	6.557	28.20	-21.64
138	5690	2.462	2.462	28.20	-25.74

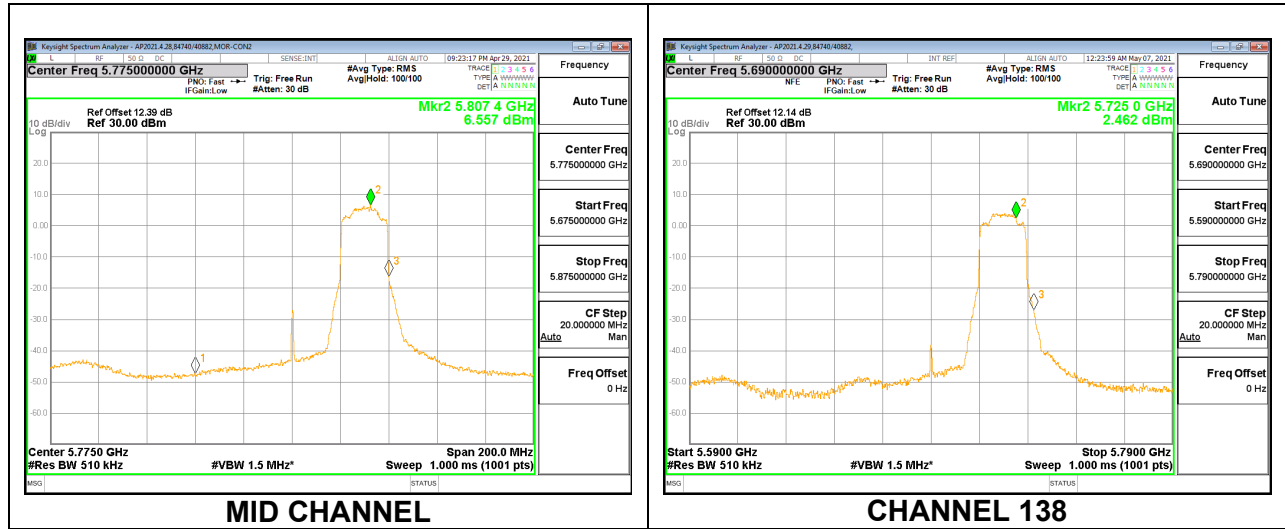

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 53

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	18.40	18.40	28.20	-9.80

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.207	7.207	28.20	-20.99

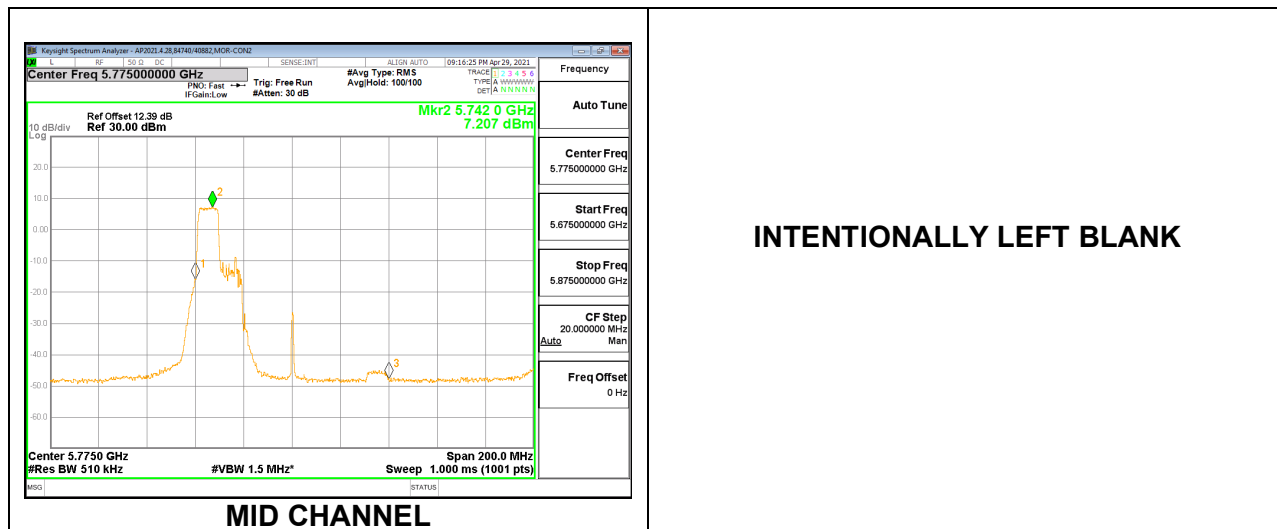

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 56

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	18.74	18.74	28.20	-9.46

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.488	7.488	28.20	-20.71

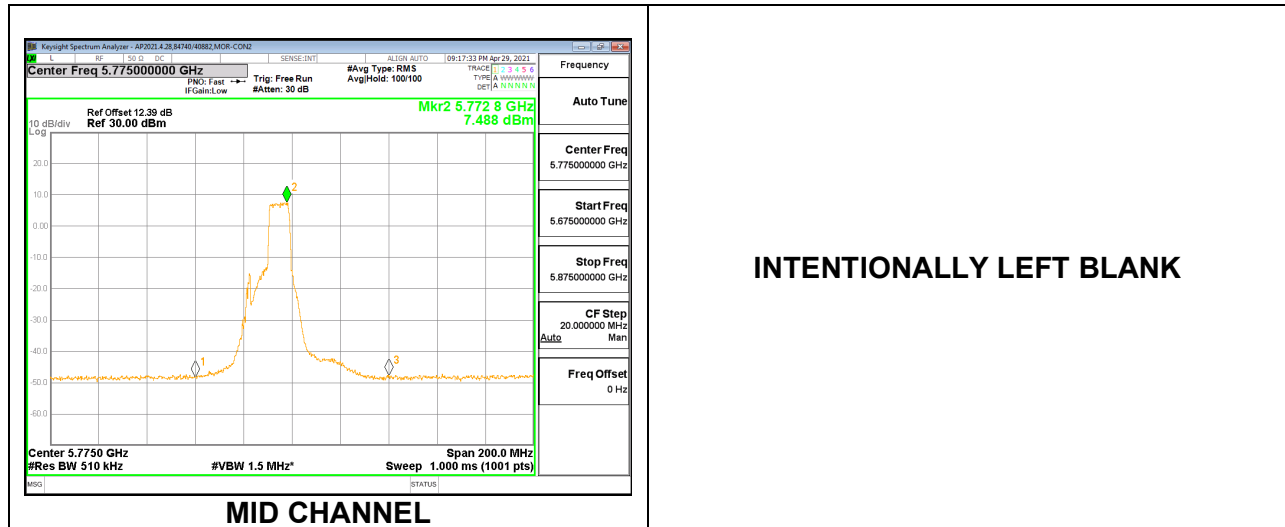

INTENTIONALLY LEFT BLANK

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 60

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20
138	5690	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	18.55	18.55	28.20	-9.65
138	5690	18.05	18.05	28.20	-10.15

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.558	7.558	28.20	-20.64
138	5690	5.441	5.441	28.20	-22.76

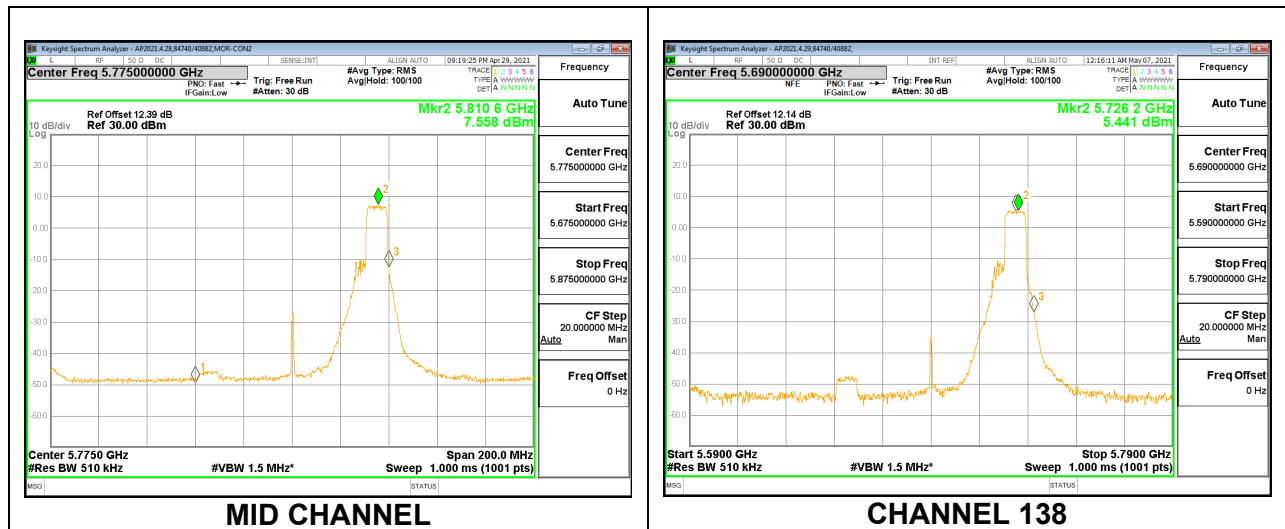

1TX Antenna A OFDMA MODE: 52-Tones, RU Index 37

Test Engineer:	22797/40882
Test Date:	2021-06-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.44	17.44	28.20	-10.76

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	8.296	8.296	28.20	-19.90

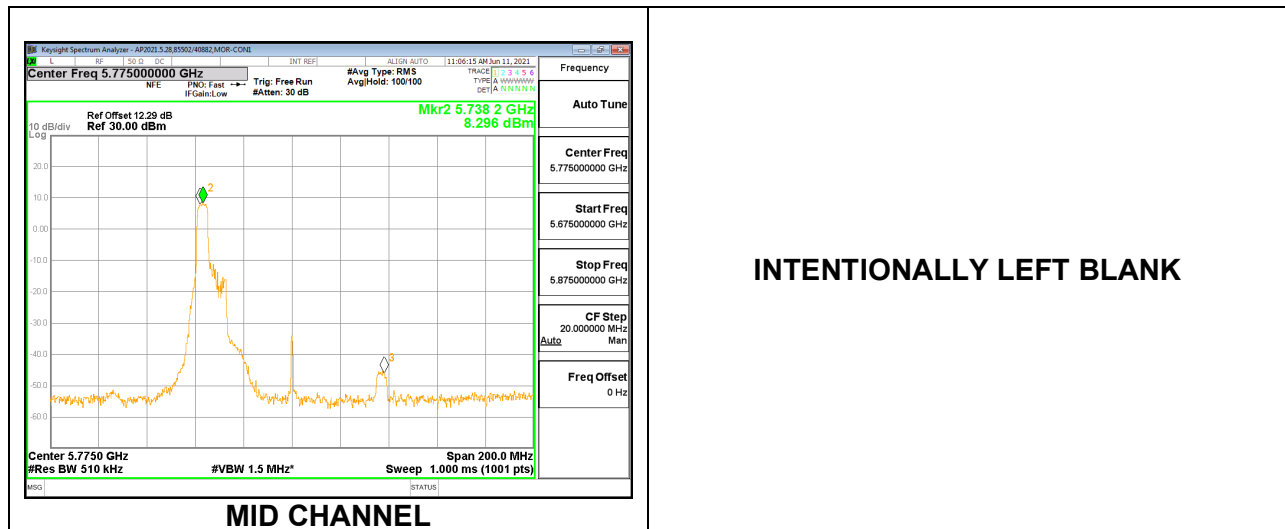

1TX Antenna A OFDMA MODE: 52-Tones, RU Index 44

Test Engineer:	22797/40882
Test Date:	2021-06-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.54	17.54	28.20	-10.66

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	8.483	8.483	28.20	-19.72

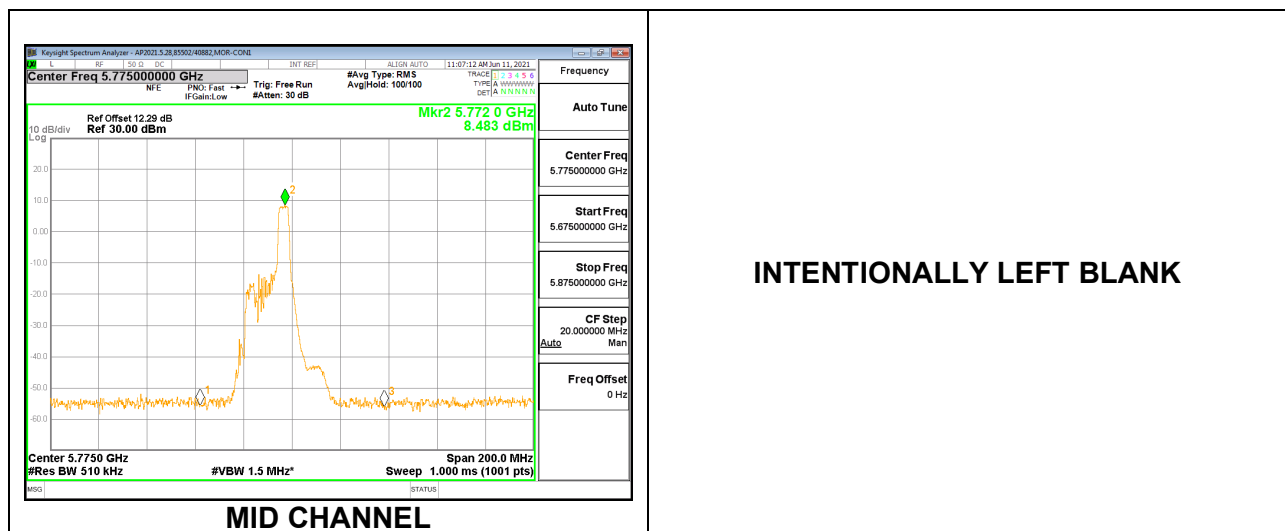

1TX Antenna A OFDMA MODE: 52-Tones, RU Index 52

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-06-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20
138	5690	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.34	17.34	28.20	-10.86
138	5690	15.05	15.05	28.20	-13.15

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	8.144	8.144	28.20	-20.06
138	5690	5.521	5.521	28.20	-22.68

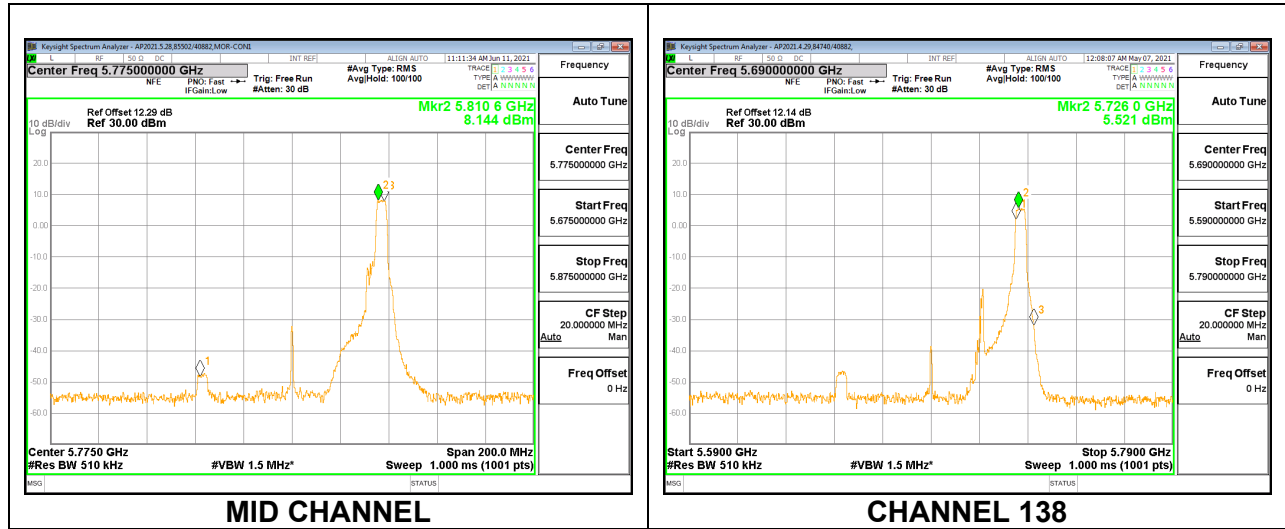

1TX Antenna A OFDMA MODE: 26-Tones, RU Index 0

Test Engineer:	22797/40882
Test Date:	2021-06-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	14.74	14.74	28.20	-13.46

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.417	7.417	28.20	-20.78

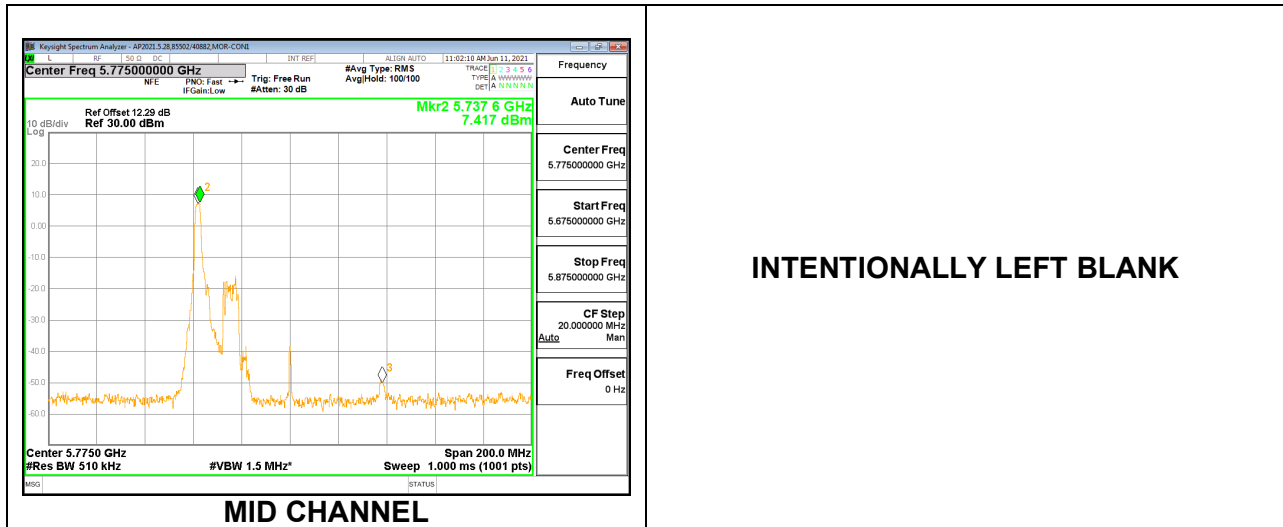

INTENTIONALLY LEFT BLANK

1TX Antenna A OFDMA MODE: 26-Tones, RU Index 18

Test Engineer:	22797/40882
Test Date:	2021-06-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	14.25	14.25	28.20	-13.95

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.170	7.170	28.20	-21.03

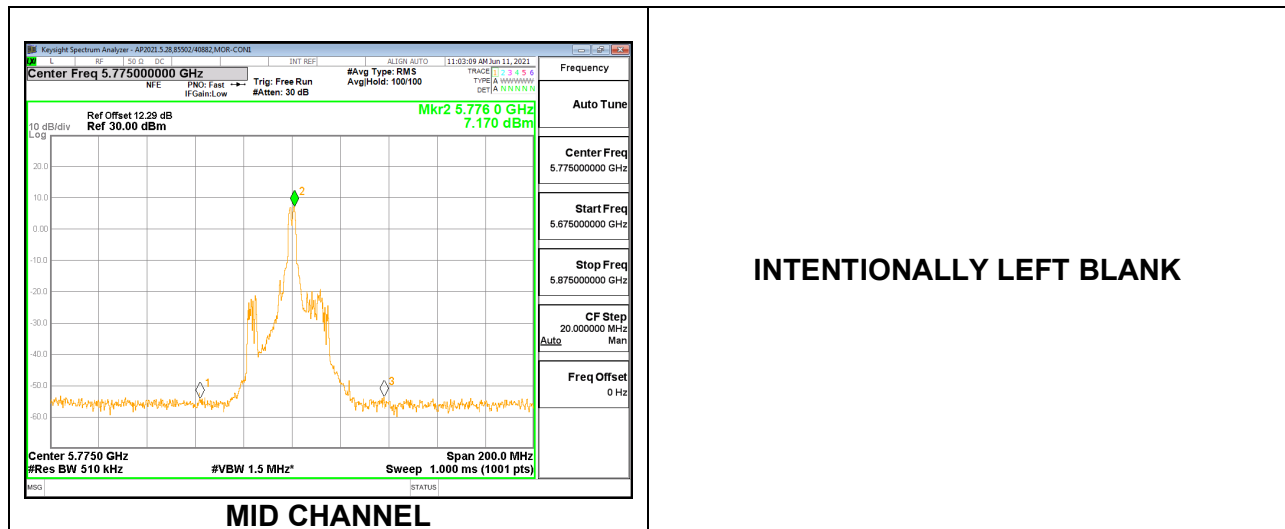

1TX Antenna A OFDMA MODE: 26-Tones, RU Index 36

Test Engineer:	22797/40882
Test Date:	2021-06-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/500KHz)
Mid	5775	7.80	28.20	28.20
138	5690	7.80	28.20	28.20


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	14.72	14.72	28.20	-13.48
138	5690	11.93	11.93	28.20	-16.27

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/500KHz)	Total Corr'd PSD (dBm/500KHz)	PSD Limit (dBm/500KHz)	PSD Margin (dB)
Mid	5775	7.878	7.878	28.20	-20.32
138	5690	5.384	5.384	28.20	-22.82

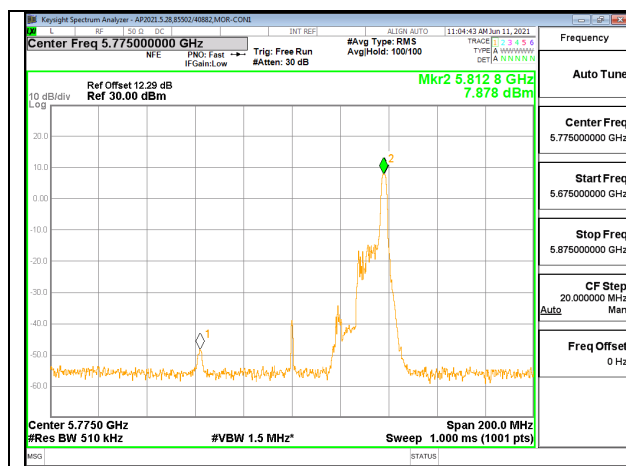

MID CHANNEL

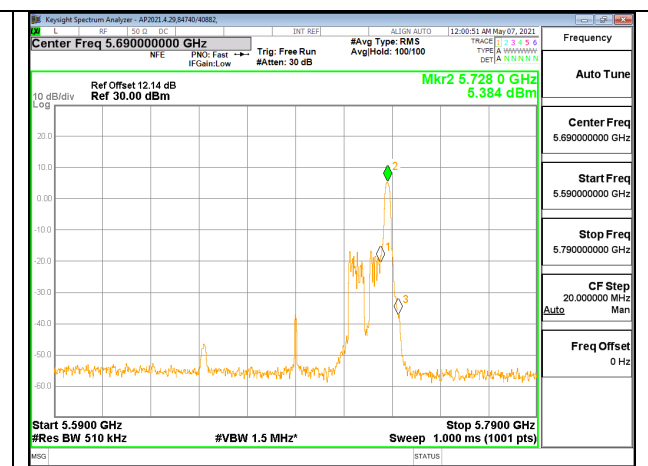

CHANNEL 138

1TX Antenna B OFDMA MODE: SU, Single User

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30
138	5690	7.70	28.30	28.30


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.50	15.50	28.30	-12.80
138	5690	14.98	15.10	28.30	-13.20

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	-5.352	-5.232	28.30	-33.53
138	5690	-10.105	-9.985	28.30	-38.29

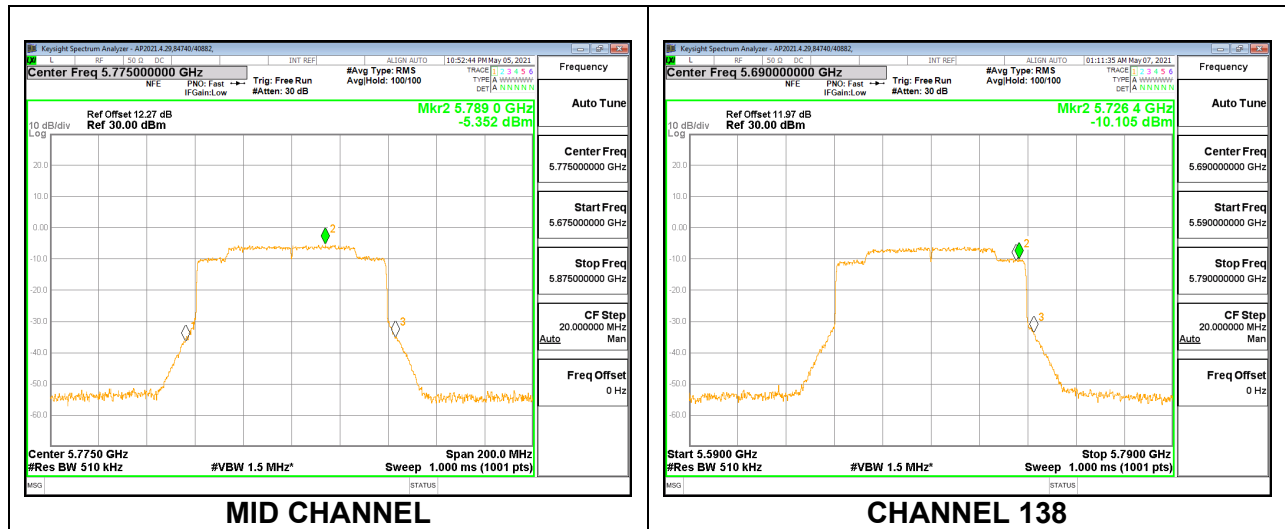

1TX Antenna B OFDMA MODE: 484-Tones, RU Index 65

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.42	15.42	28.30	-12.88

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	-1.184	-1.184	28.30	-29.48

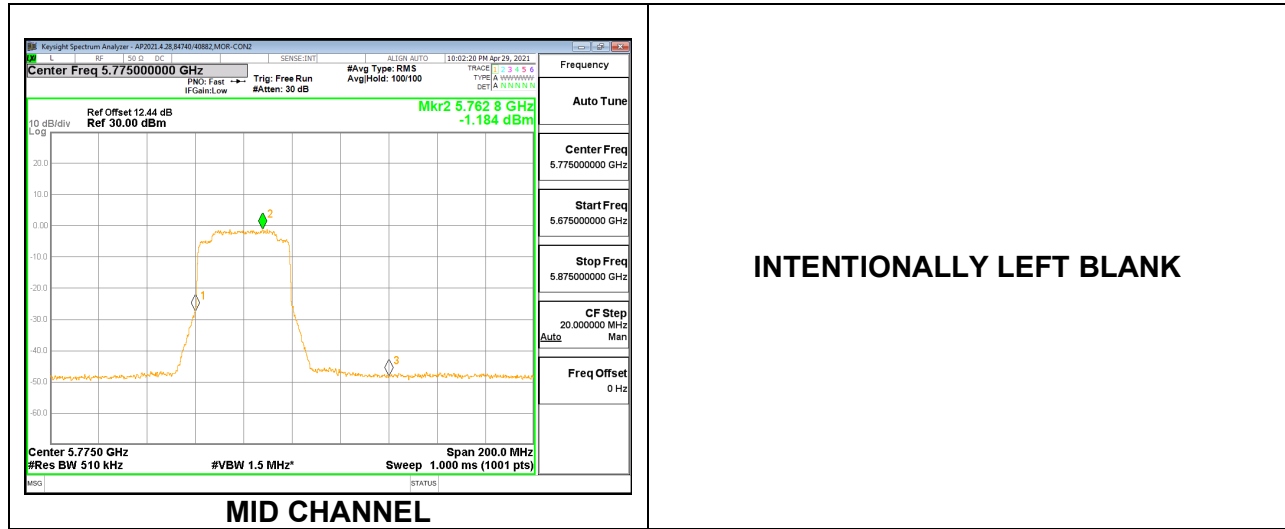

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 484-Tones, RU Index 66

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30
138	5690	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.33	15.33	28.30	-12.97
138	5690	15.90	15.90	28.30	-12.40

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	-1.463	-1.463	28.30	-29.76
138	5690	-5.209	-5.209	28.30	-33.51

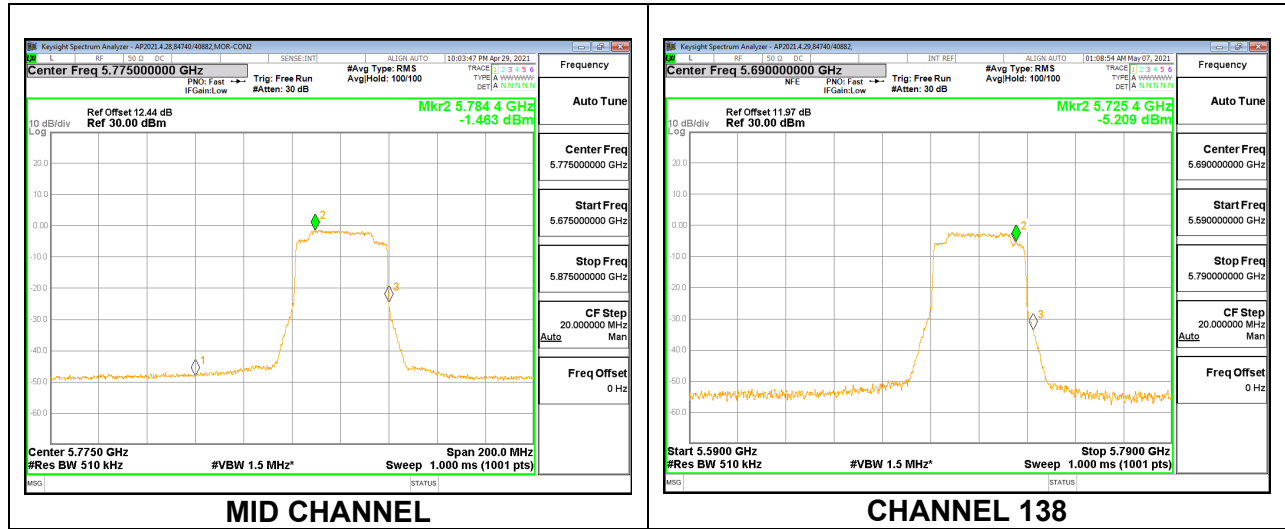

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 61

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	19.40	19.40	28.30	-8.90

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	5.625	5.625	28.30	-22.68

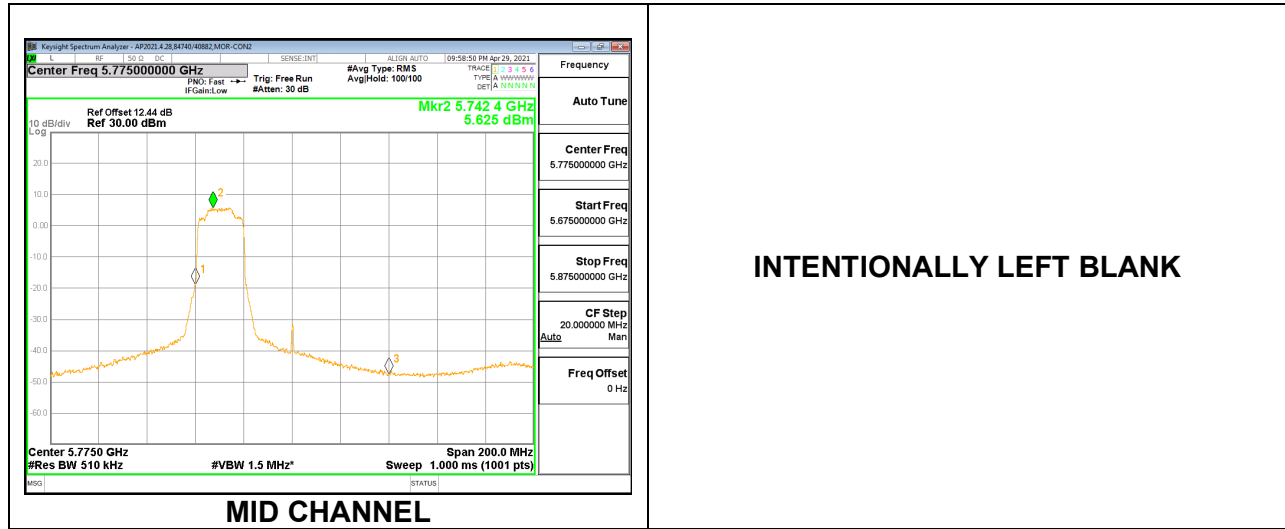

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 62

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	18.76	18.76	28.30	-9.54

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	5.783	5.783	28.30	-22.52

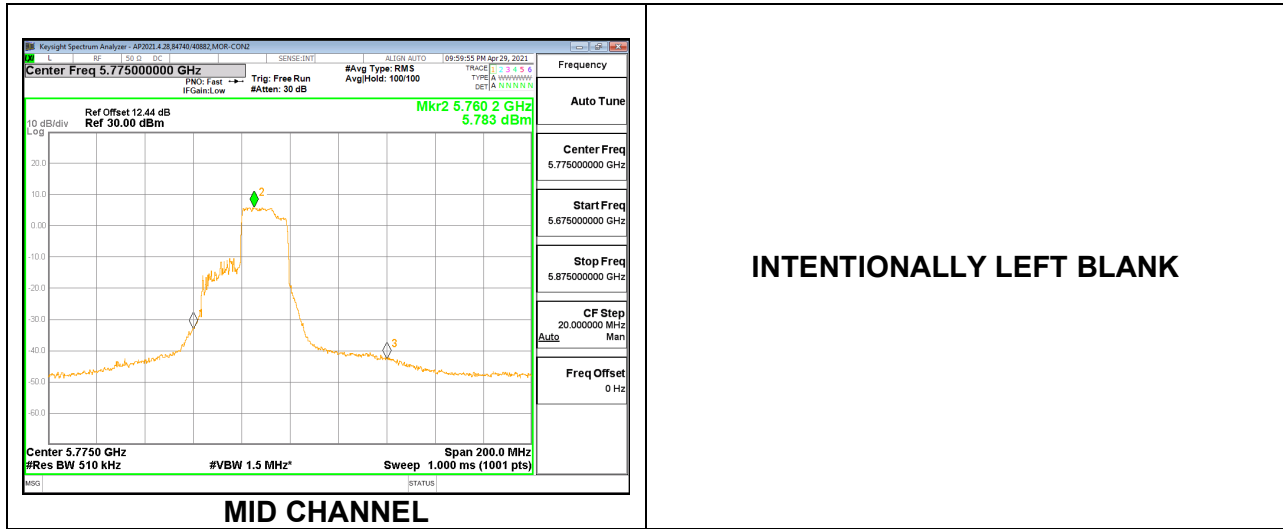

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 64

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30
138	5690	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	19.49	19.49	28.30	-8.81
138	5690	15.85	15.85	28.30	-12.45

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	5.764	5.764	28.30	-22.54
138	5690	-0.876	-0.876	28.30	-29.18

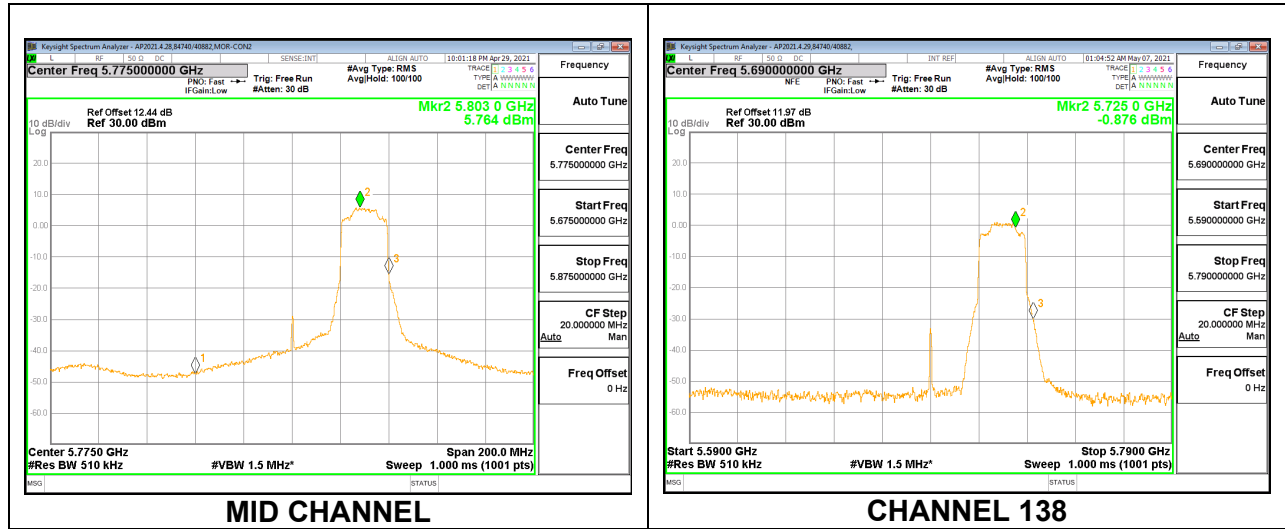

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 53

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	18.49	18.49	28.30	-9.81

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.271	7.271	28.30	-21.03

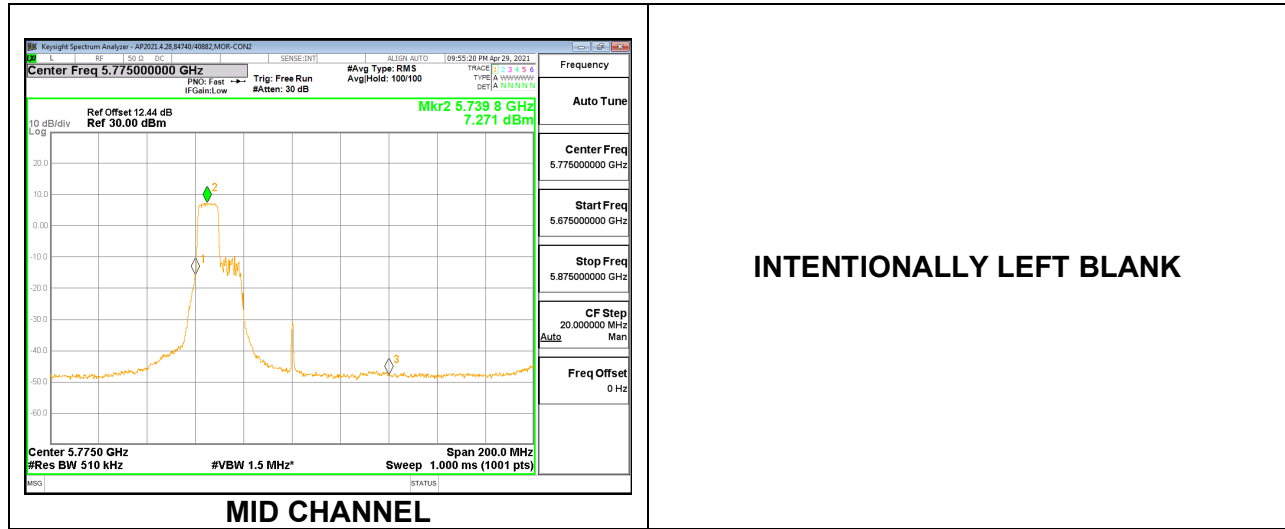

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 56

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	17.85	17.85	28.30	-10.45

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.516	7.516	28.30	-20.78

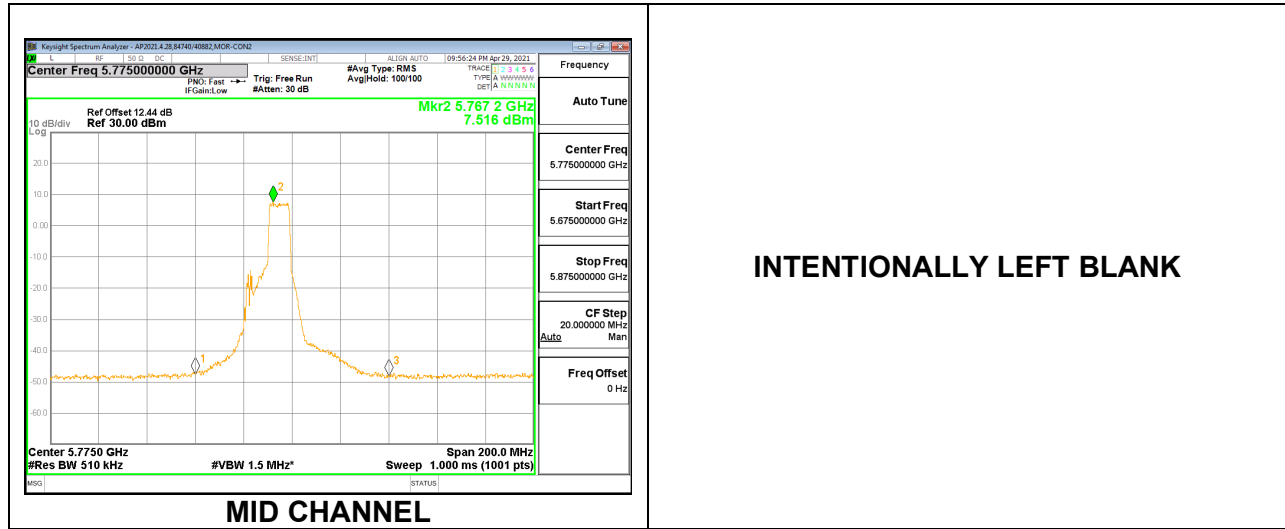

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 60

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30
138	5690	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	18.41	18.41	28.30	-9.89
138	5690	17.99	17.99	28.30	-10.31

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.166	7.166	28.30	-21.13
138	5690	5.327	5.327	28.30	-22.97

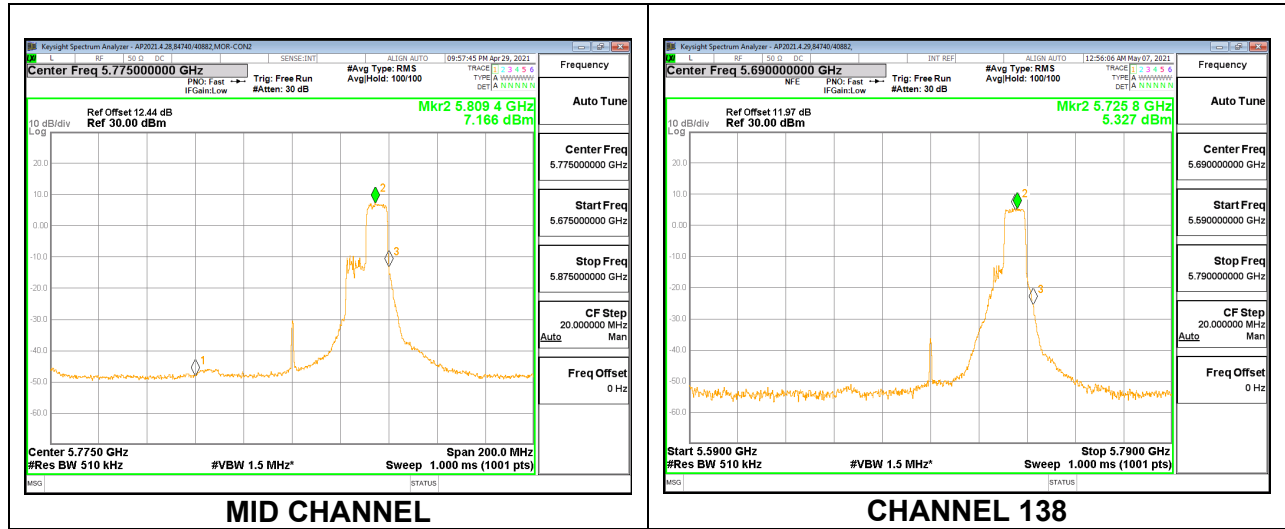

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 37

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.43	15.43	28.30	-12.87

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.251	7.251	28.30	-21.05

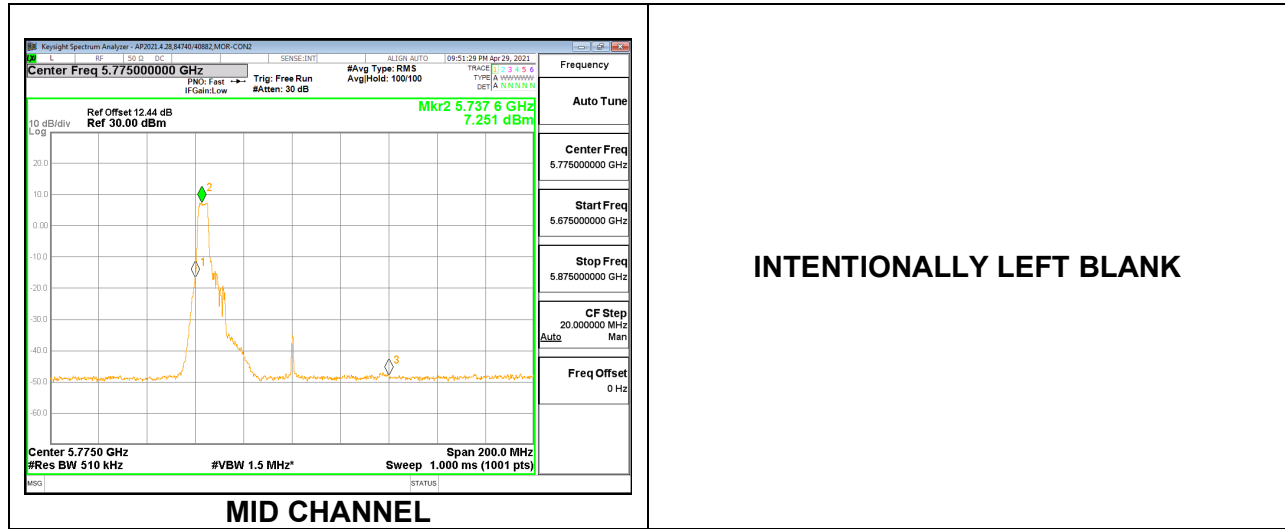

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 44

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	14.57	14.57	28.30	-13.73

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.408	7.408	28.30	-20.89

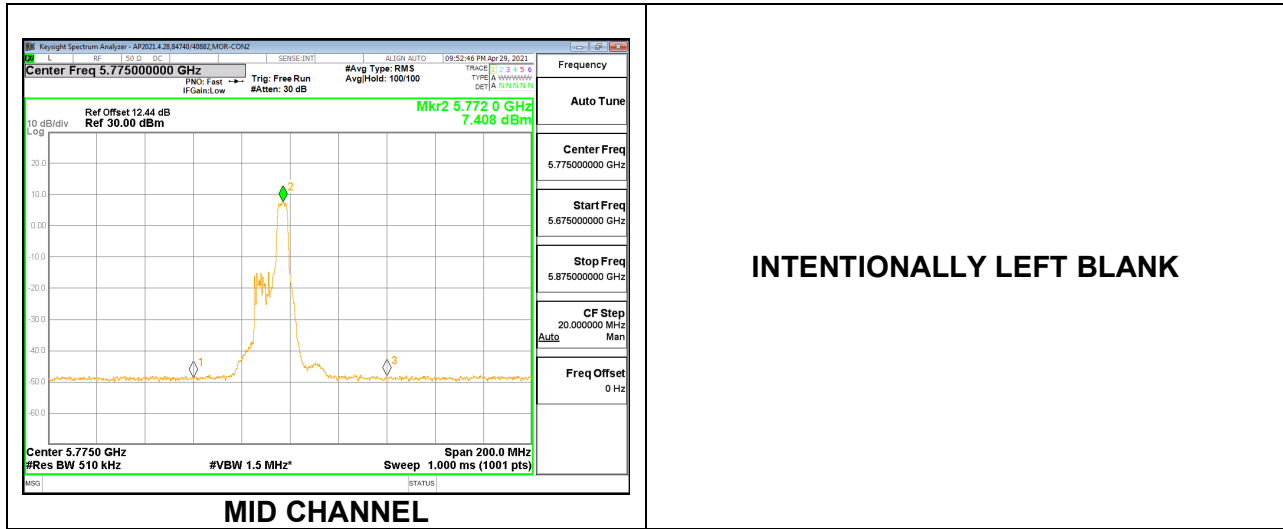

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 52

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30
138	5690	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.50	15.50	28.30	-12.80
138	5690	15.00	15.00	28.30	-13.30

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	6.840	6.840	28.30	-21.46
138	5690	5.361	5.361	28.30	-22.94

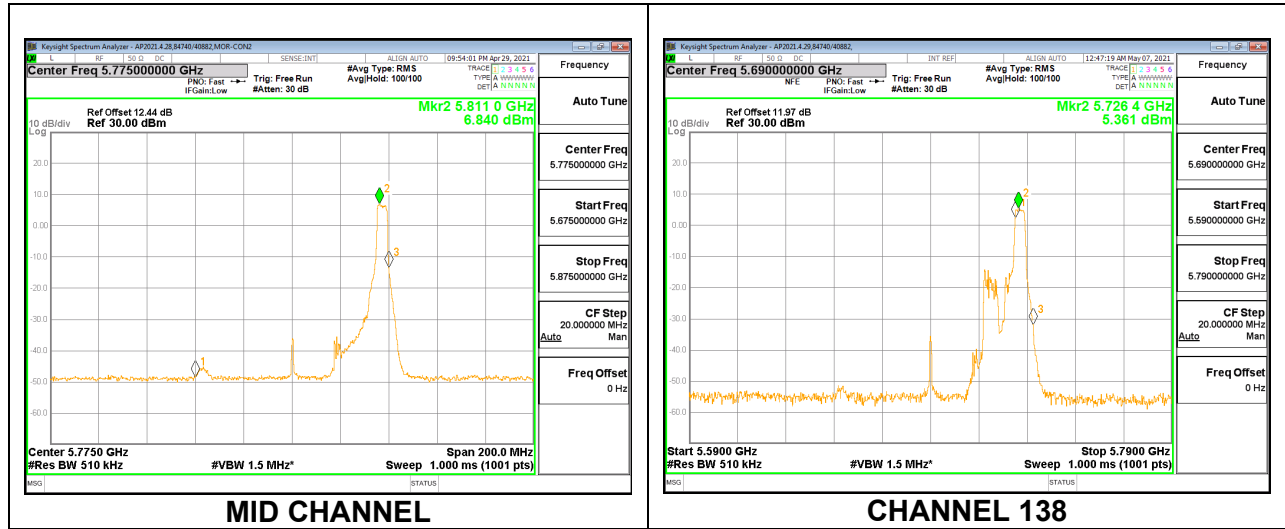

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 0

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	12.00	12.00	28.30	-16.30

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	7.199	7.199	28.30	-21.10

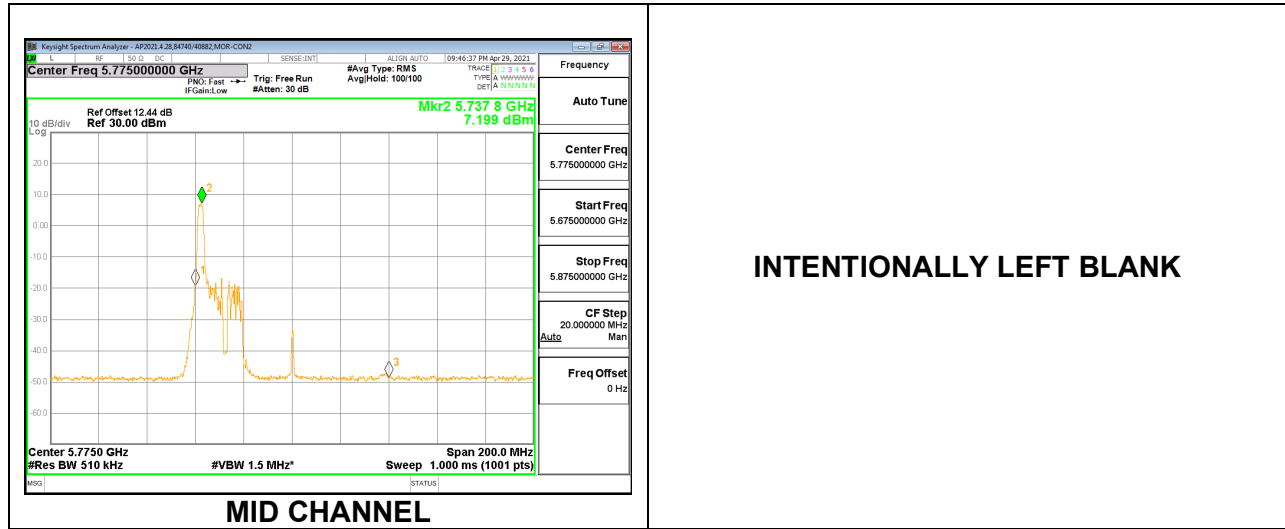

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 18

Test Engineer:	84740/40882
Test Date:	2021-04-29

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	11.46	11.46	28.30	-16.84

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	5.992	5.992	28.30	-22.31

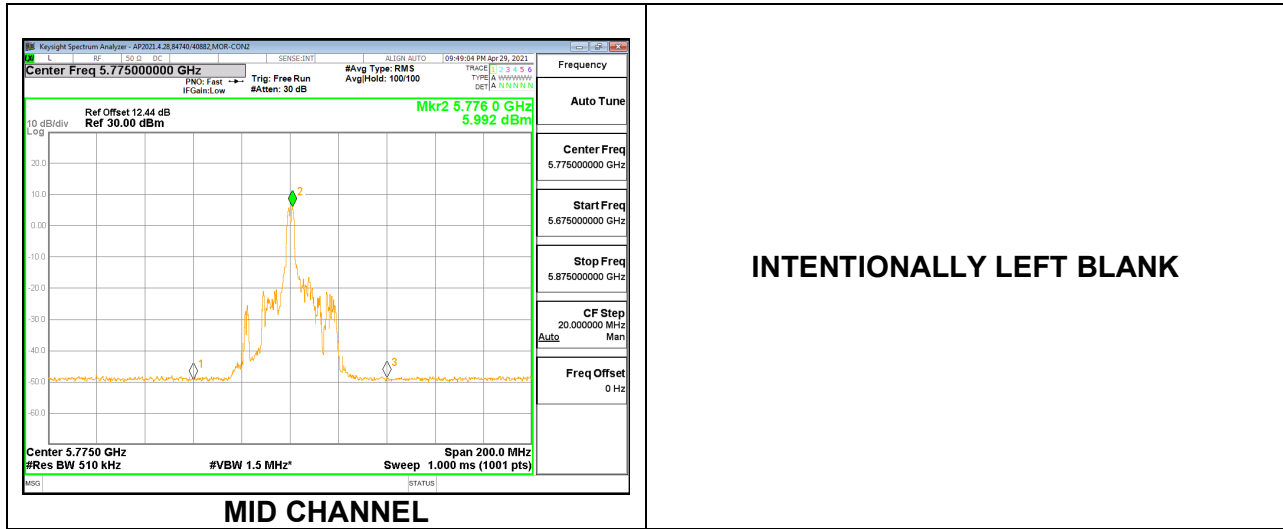

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 36

Test Engineer:	84740/40882
Test Date:	2021-04-29, 2021-05-07

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC/ISE Power Limit (dBm)	FCC/ISED PSD Limit (dBm/ 500KHz)
Mid	5775	7.70	28.30	28.30
138	5690	7.70	28.30	28.30


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	11.84	11.84	28.30	-16.46
138	5690	11.91	11.91	28.30	-16.39

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	6.532	6.532	28.30	-21.77
138	5690	5.297	5.297	28.30	-23.00

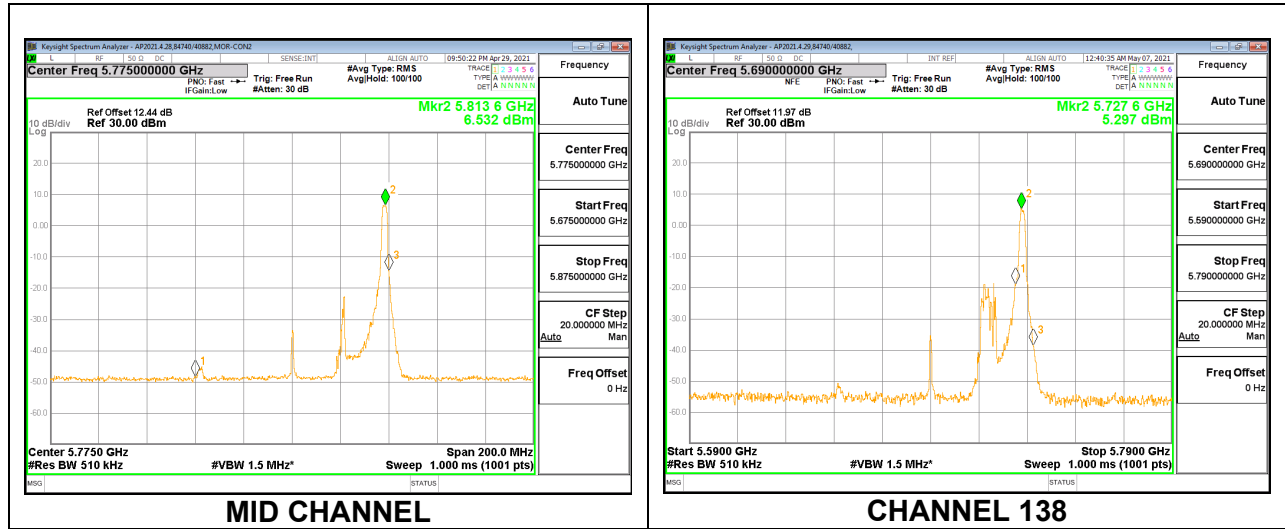

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands
FCC §15.407(b)(1-3) -Un-Restricted bands

After January 01, 2019 for Outside of the Restricted Bands Emissions

RSS 247 Issue 2 Sections
6.2.4.2 (for 5725-5850 MHz band)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.8GHz BAND

2TX Antenna A + Antenna B OFDMA MODE: SU, Single User

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

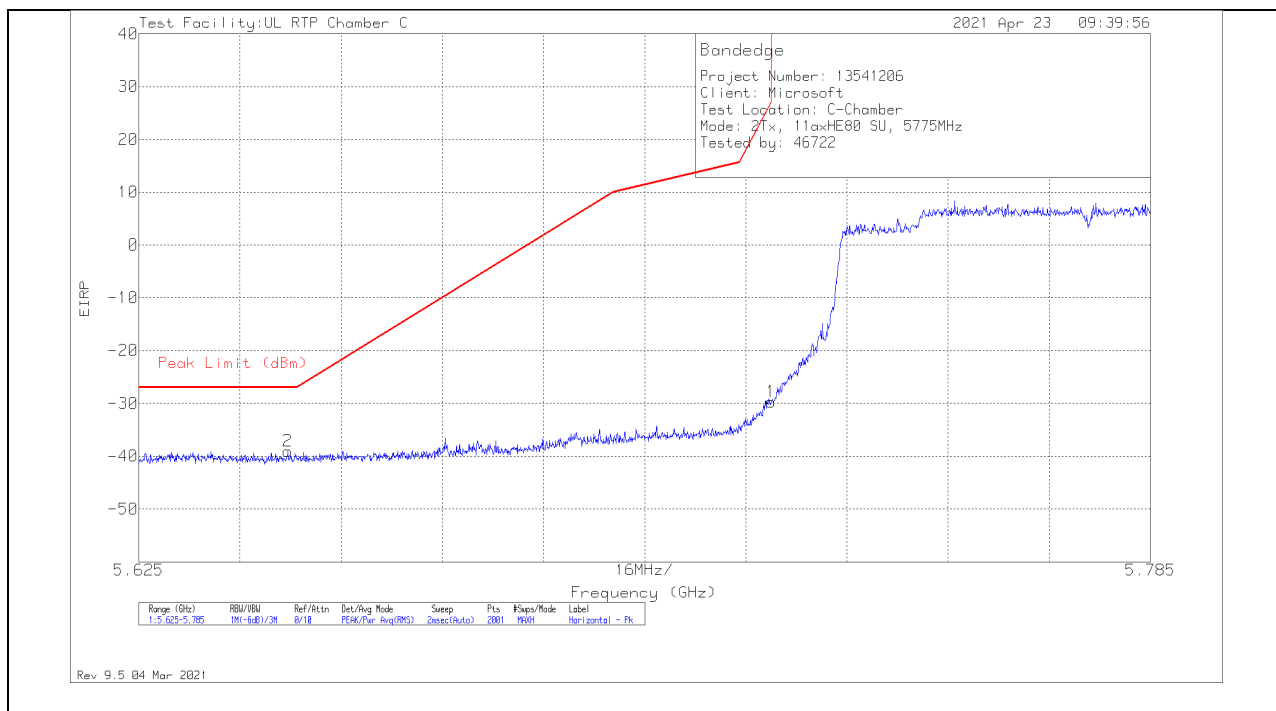

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6486	-72.68	Pk	34.8	-13	11.8	-39.08	-27	-12.08	193	230	H
1	5.725	-63.63	Pk	34.8	-12.7	11.8	-29.73	27	-56.73	193	230	H

Pk - Peak detector

VERTICAL RESULT

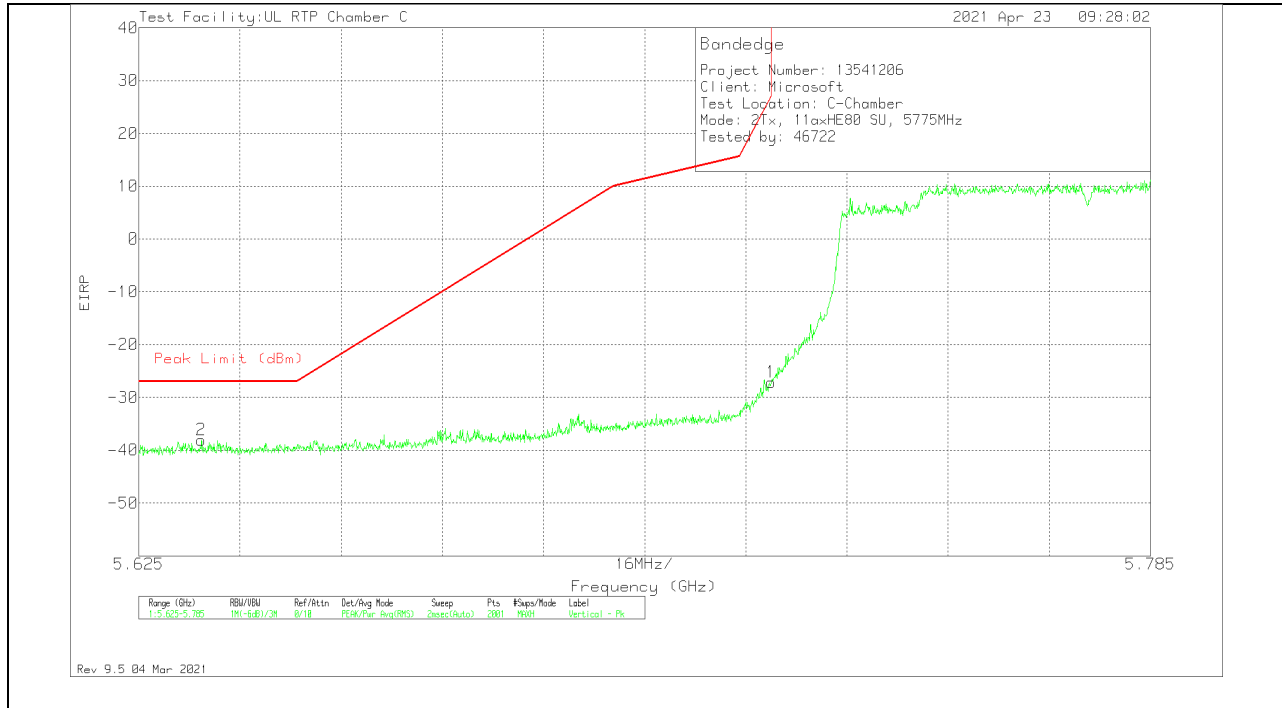


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63492	-72.2	Pk	34.8	-12.5	11.8	-38.1	-27	-11.1	208	255	V
1	5.725	-61.09	Pk	34.8	-12.7	11.8	-27.19	27	-54.19	208	255	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

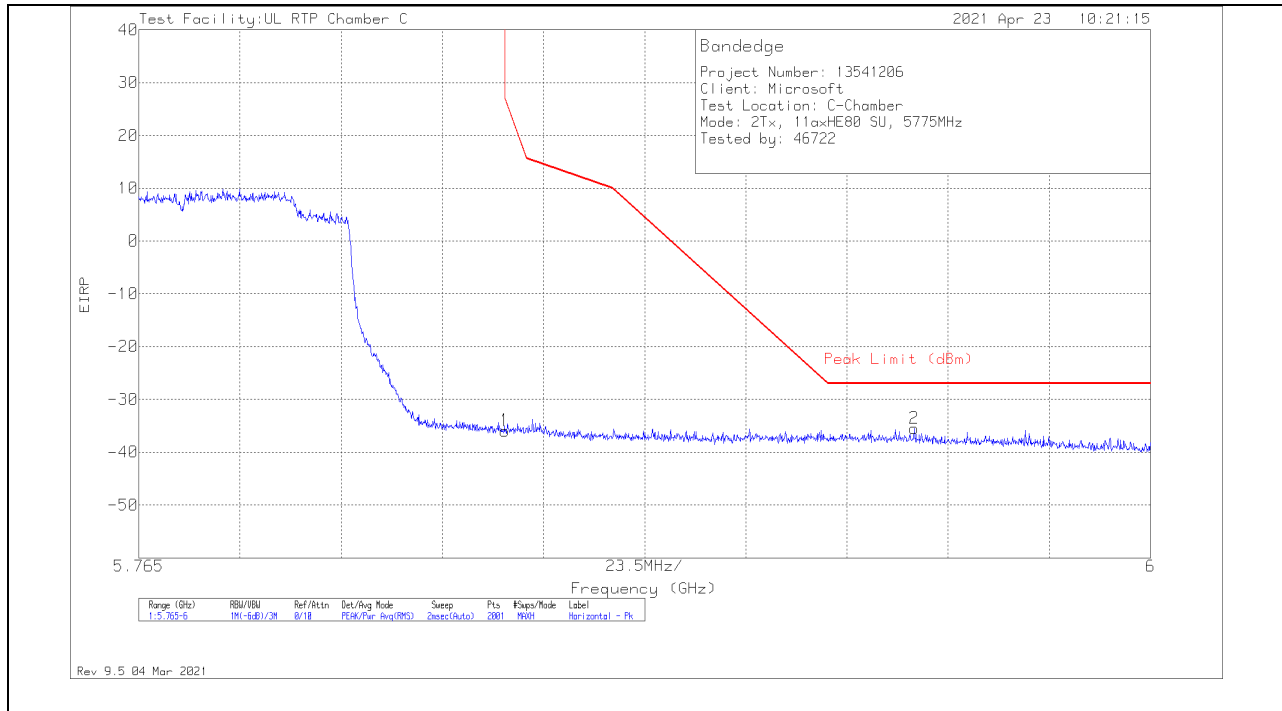

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-70.93	Pk	35.1	-11.9	11.8	-35.93	26.84	-62.77	210	285	H
2	5.94513	-70.63	Pk	35.3	-12	11.8	-35.53	-27	-8.53	210	285	H

Pk - Peak detector

VERTICAL RESULT

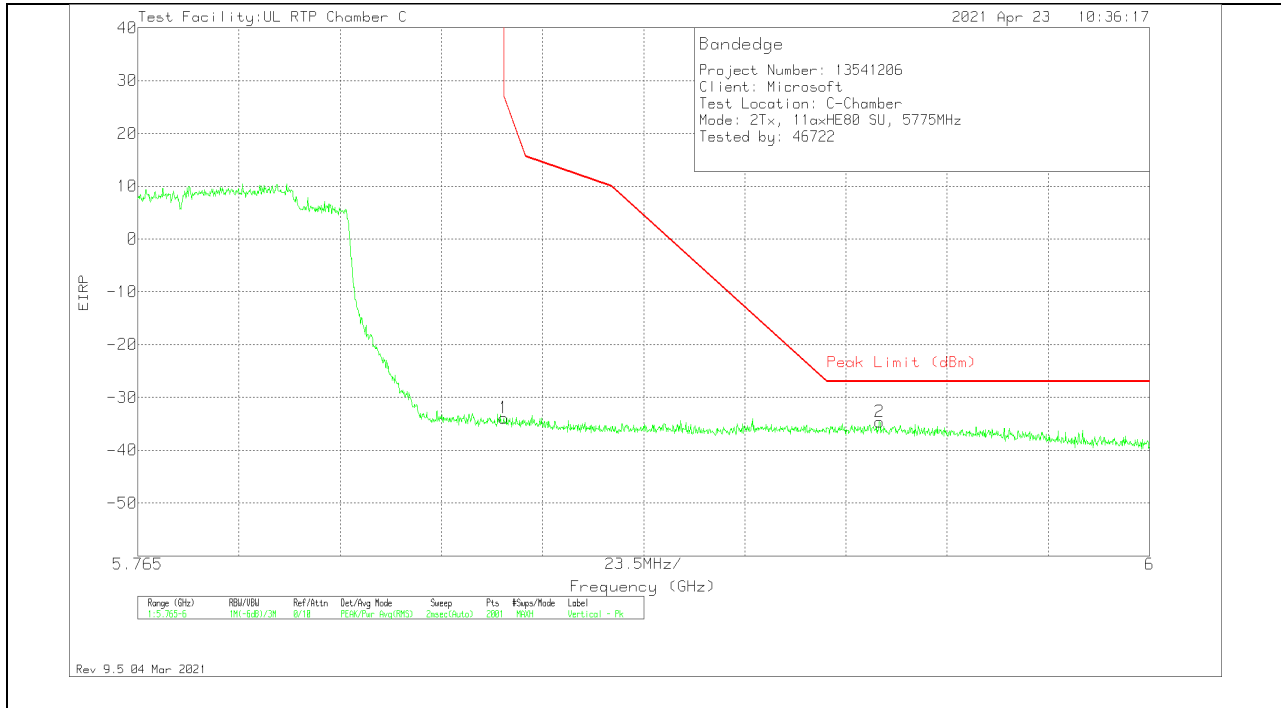


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-68.89	Pk	35.1	-11.9	11.8	-33.89	26.84	-60.73	214	394	V
2	5.93726	-69.84	Pk	35.3	-11.9	11.8	-34.64	-27	-7.64	214	394	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

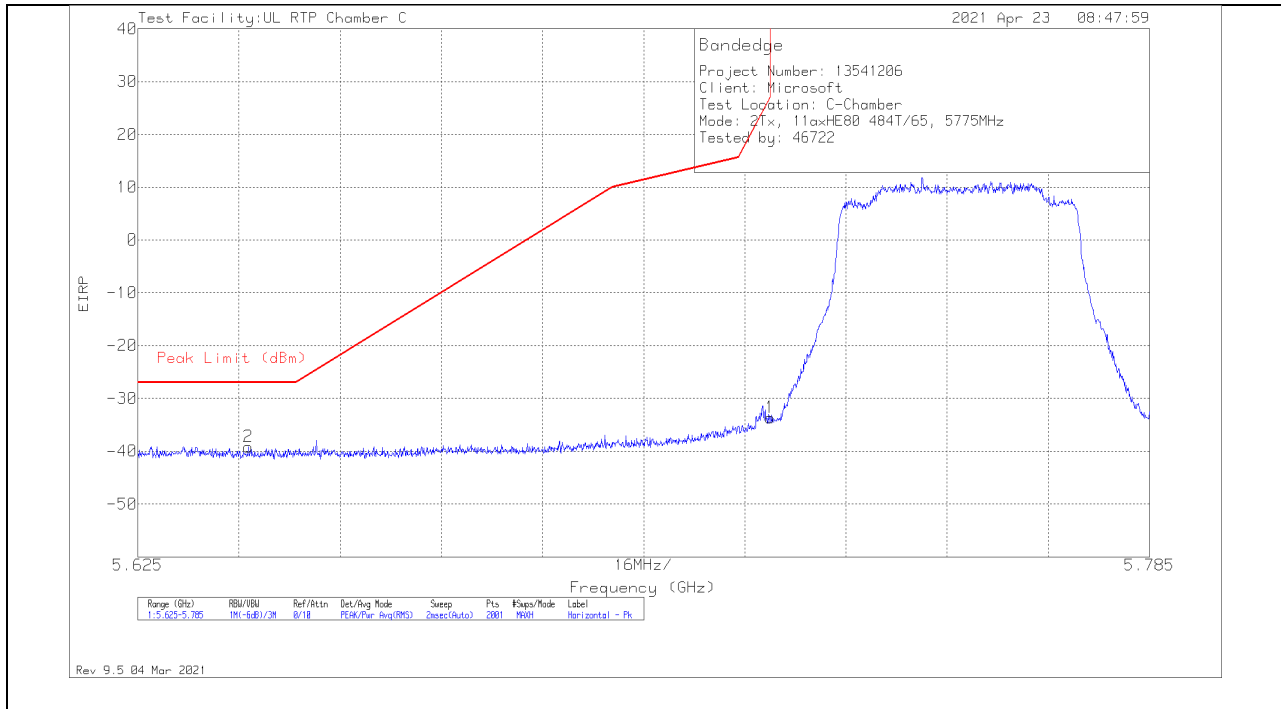

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64244	-72.83	PK	34.8	-12.9	11.8	-39.13	-27	-12.13	207	213	H
1	5.725	-67.6	PK	34.8	-12.7	11.8	-33.7	27	-60.7	207	213	H

Pk - Peak detector

VERTICAL RESULT

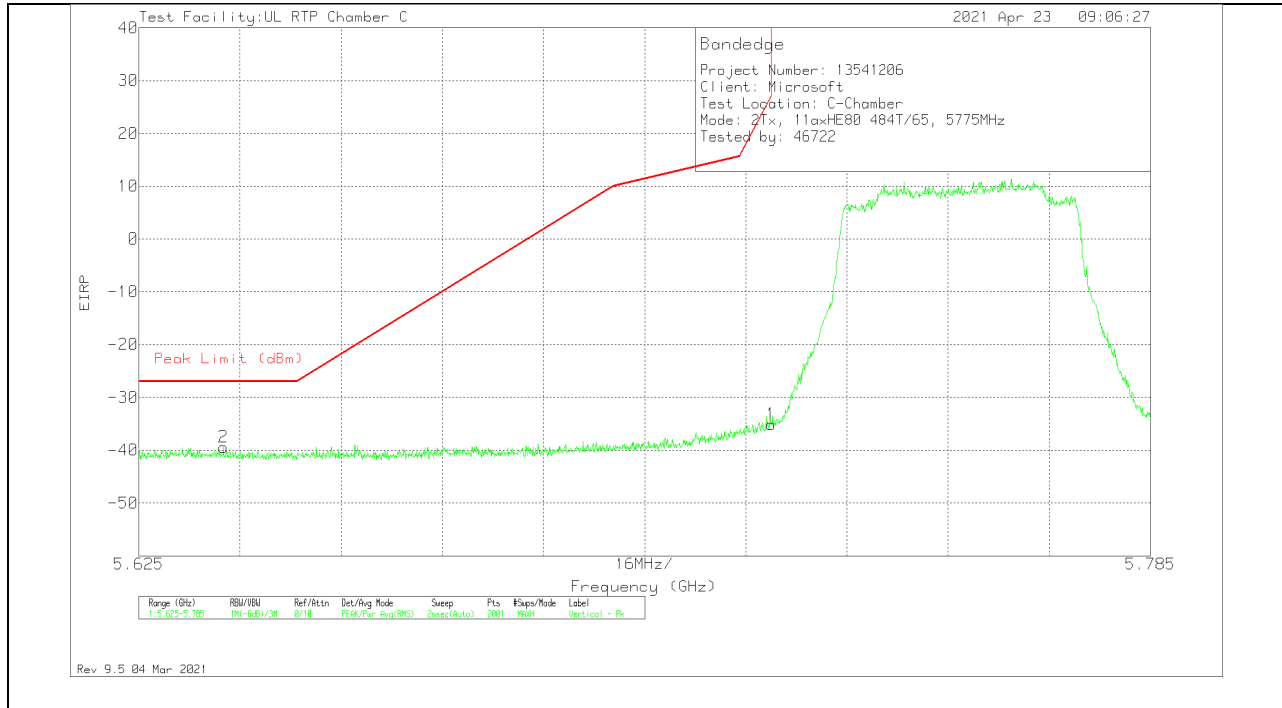


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63836	-73.33	Pk	34.8	-12.7	11.8	-39.43	-27	-12.43	221	188	V
1	5.725	-69.04	Pk	34.8	-12.7	11.8	-35.14	27	-62.14	221	188	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

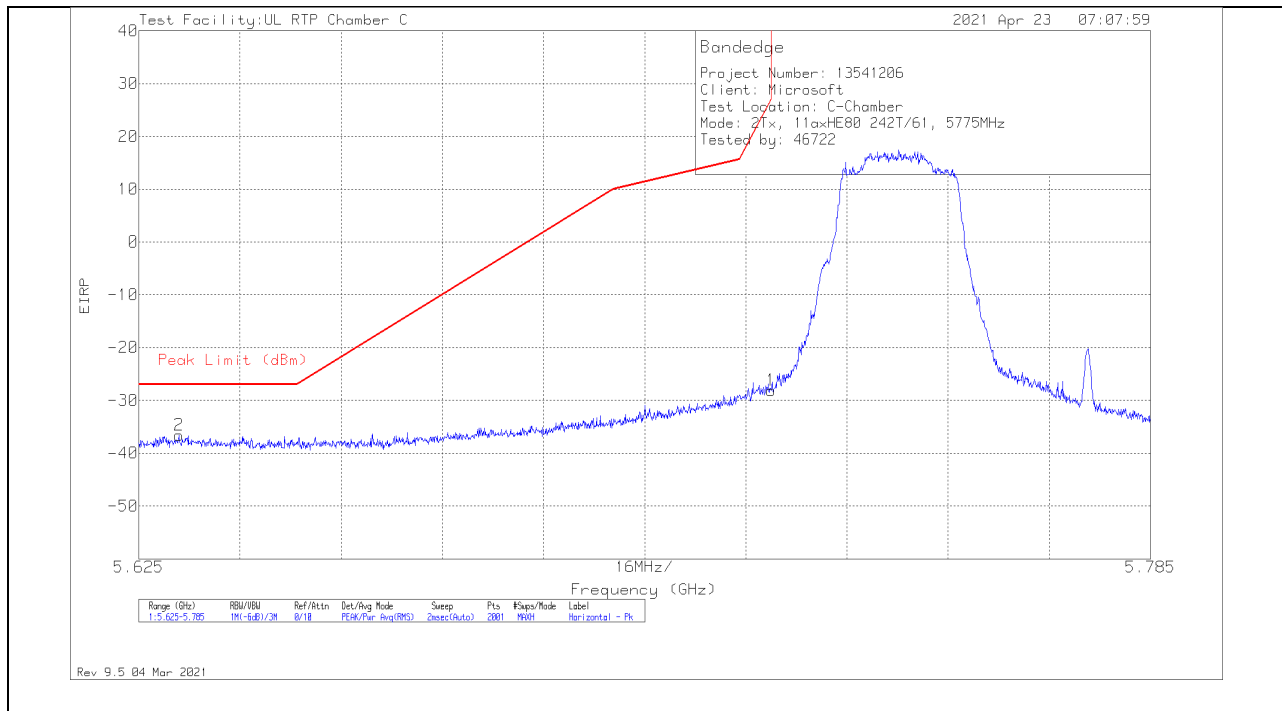

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6314	-70.77	Pk	34.8	-12.4	11.8	-36.57	-27	-9.57	213	292	H
1	5.725	-62	Pk	34.8	-12.7	11.8	-28.1	27	-55.1	213	292	H

Pk - Peak detector

VERTICAL RESULT

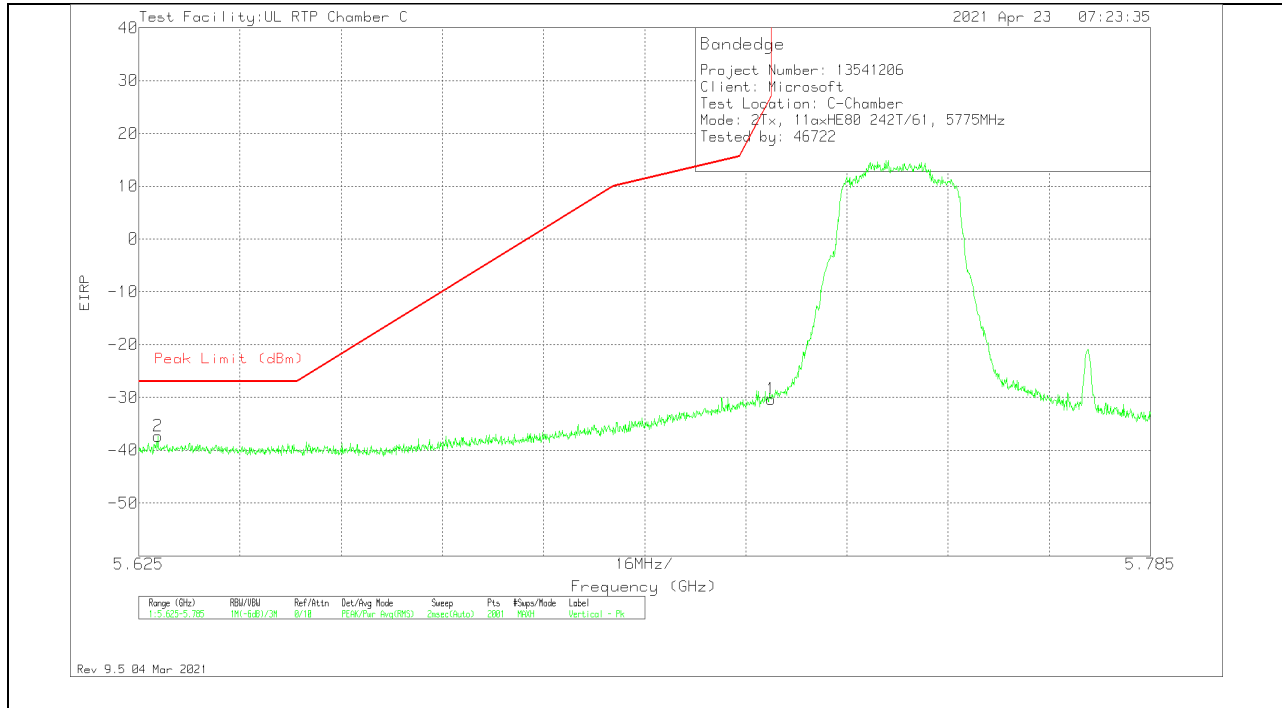


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62804	-71.4	Pk	34.8	-12.5	11.8	-37.3	-27	-10.3	226	207	V
1	5.725	-64.26	Pk	34.8	-12.7	11.8	-30.36	27	-57.36	226	207	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

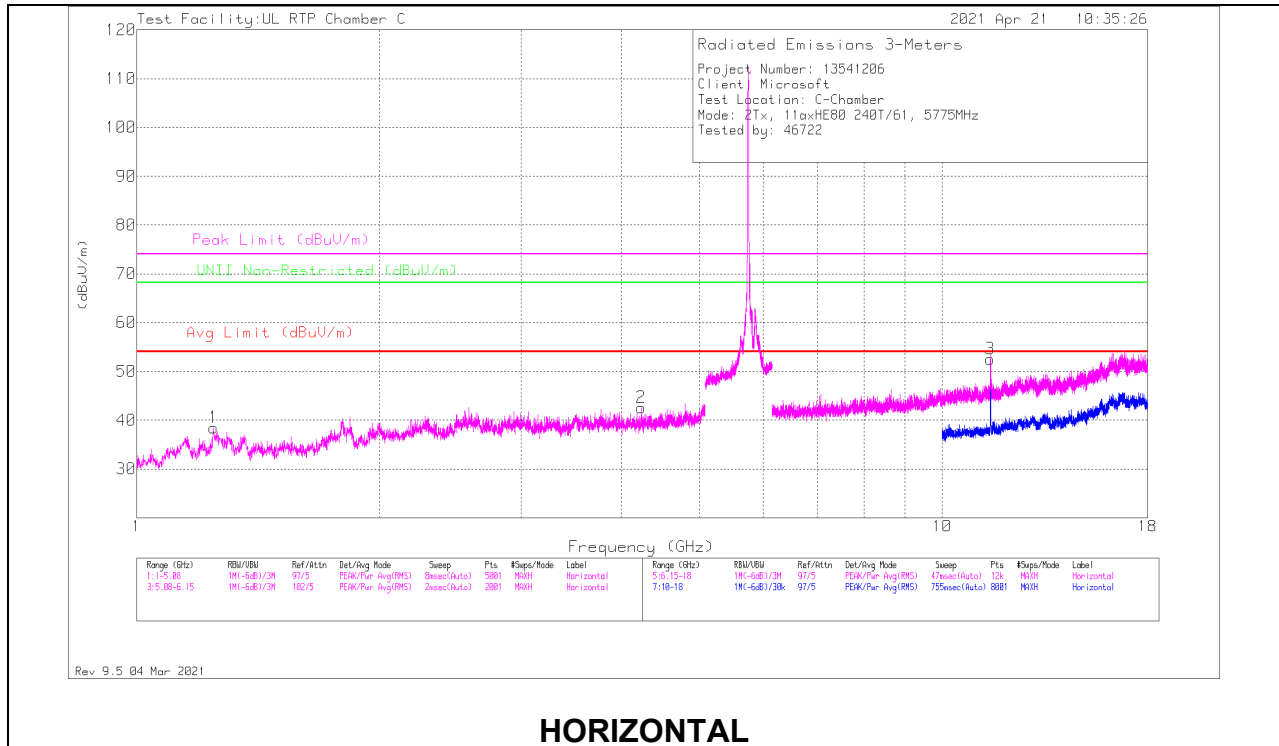

HORIZONTAL

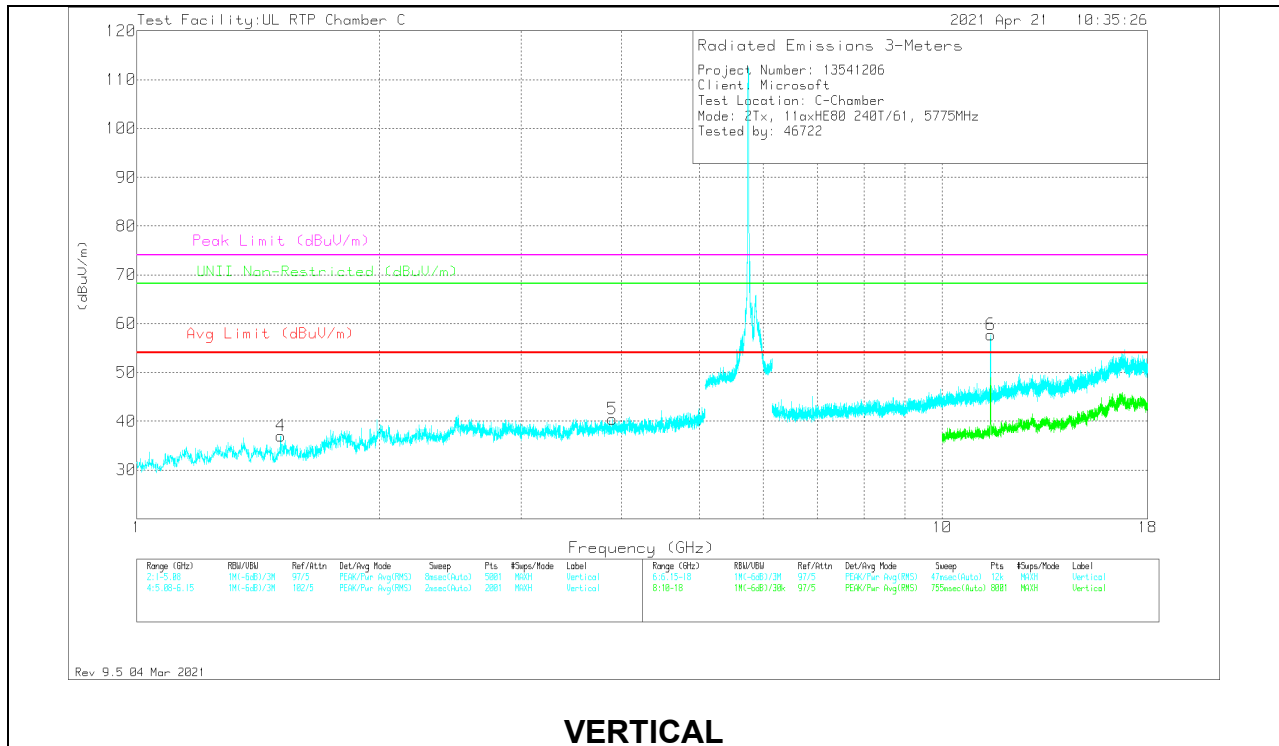

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.24643	63.88	Pk	28.2	-53.6	38.48	54	-15.52	74	-35.52	-	-	0-360	101	H
2	*** 4.22891	56.36	Pk	33.5	-47.3	42.56	54	-11.44	74	-31.44	-	-	0-360	101	H
4	*** 1.50918	61.73	Pk	28	-52.7	37.03	54	-16.97	74	-36.97	-	-	0-360	200	V
5	*** 3.8968	54.85	Pk	33.6	-48	40.45	54	-13.55	74	-33.55	-	-	0-360	101	V
3	*** 11.48314	58.08	PK-U	38.4	-39.4	57.08	-	-	74	-16.92	-	-	204	151	H
	*** 11.48489	44.4	ADV	38.4	-39.4	43.4	54	-10.6	-	-	-	-	204	151	H
6	*** 11.49007	62.58	PK-U	38.4	-39.5	61.48	-	-	74	-12.52	-	-	162	238	V
	*** 11.48838	50.12	ADV	38.4	-39.4	49.12	54	-4.88	-	-	-	-	162	238	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

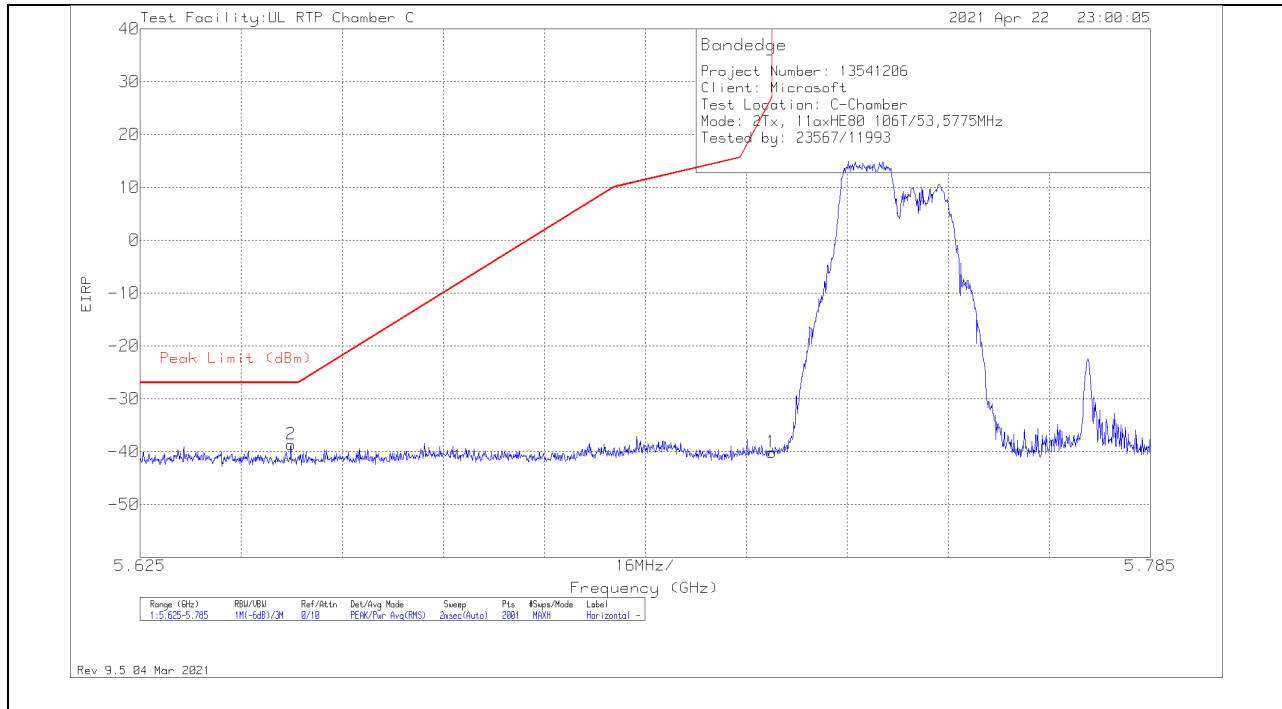

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64892	-72.24	Pk	34.8	-13	11.8	-38.64	-27	-11.64	355	290	H
1	5.725	-74.01	Pk	34.8	-12.7	11.8	-40.11	27	-67.11	355	290	H

Pk - Peak detector

VERTICAL RESULT

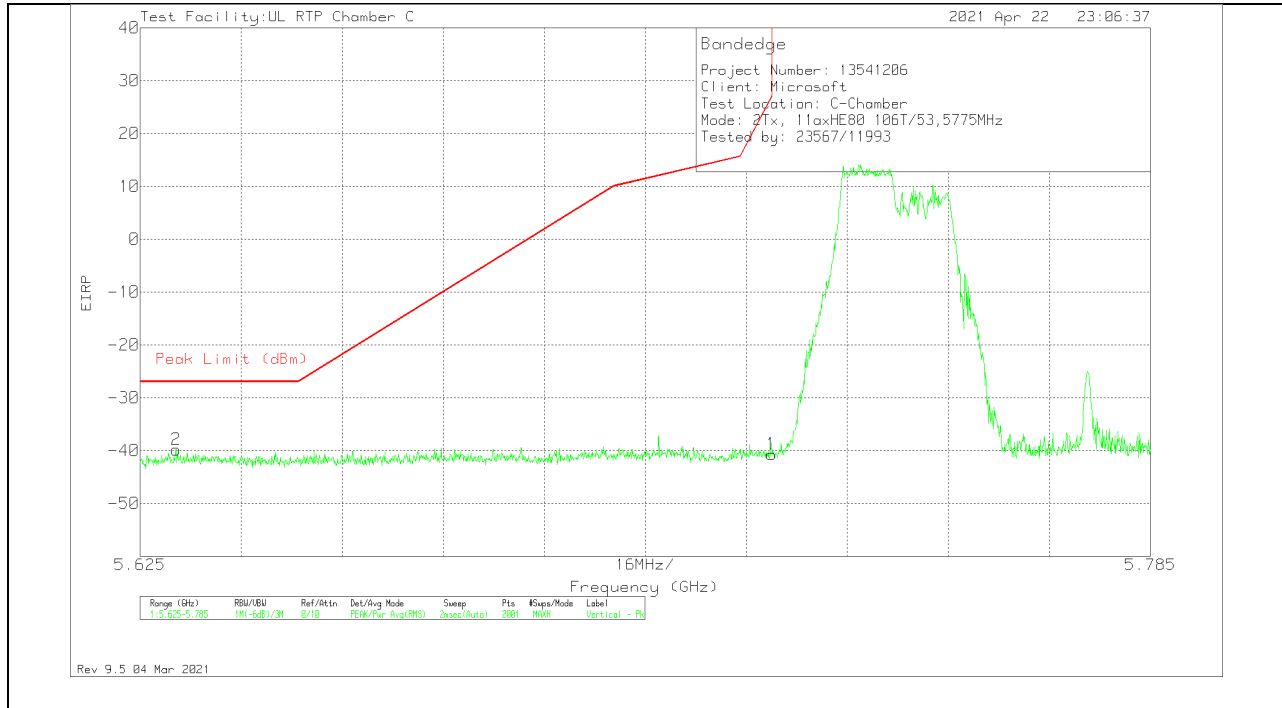


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63068	-74.02	Pk	34.8	-12.4	11.8	-39.82	-27	-12.82	15	238	V
1	5.725	-74.61	Pk	34.8	-12.7	11.8	-40.71	27	-67.71	15	238	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 37

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

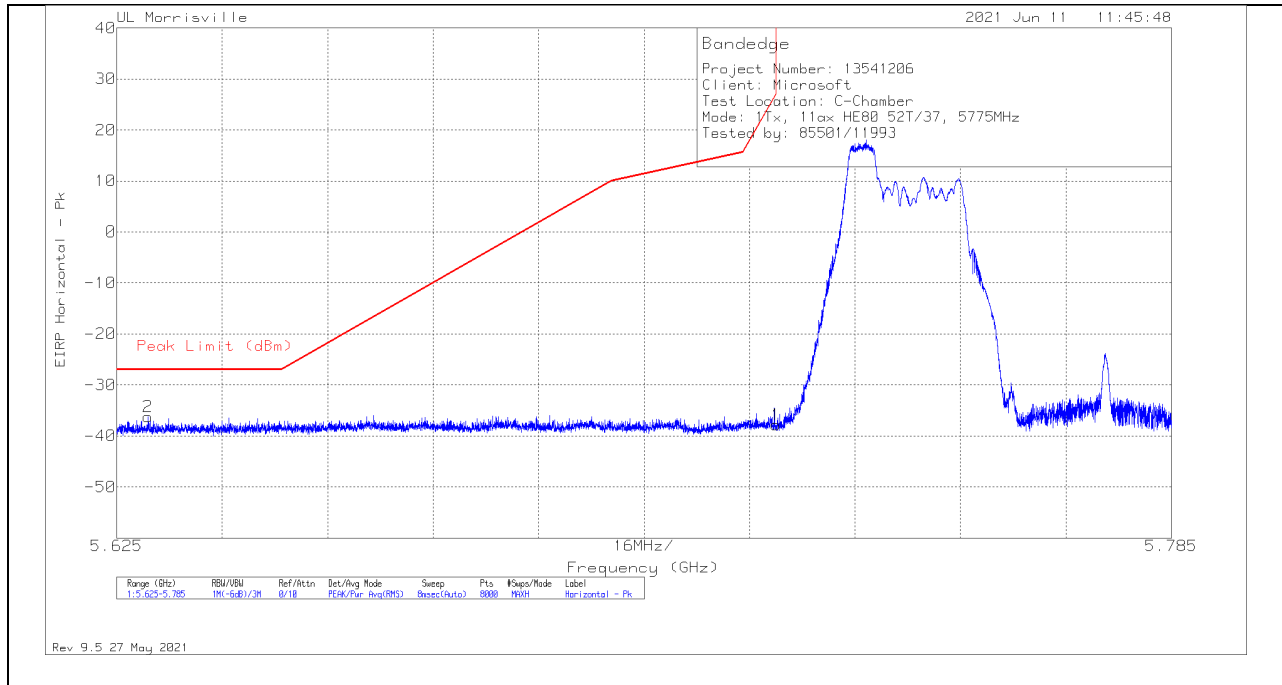

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62978	-72.91	Pk	34.4	-9.5	11.8	-36.21	-27	-9.21	17	367	H
1	5.725	-74.74	Pk	34.5	-9.4	11.8	-37.84	26.99	-64.83	17	367	H

Pk - Peak detector

VERTICAL RESULT

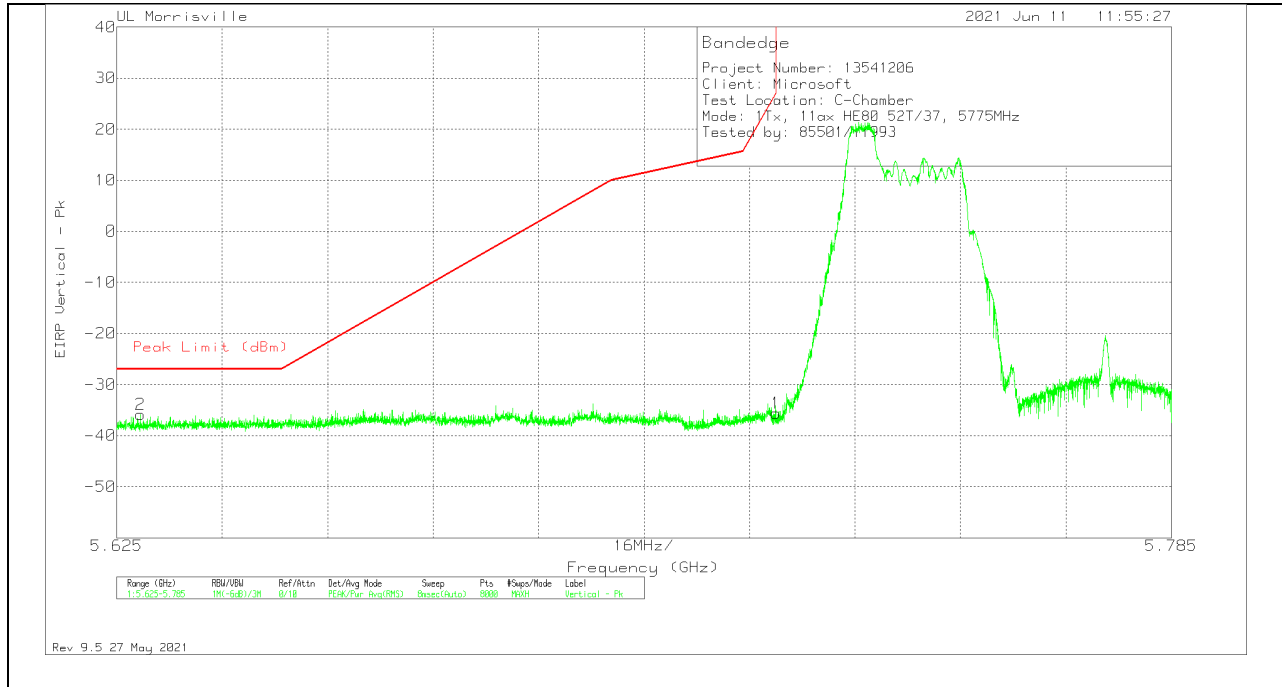


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62858	-72.56	Pk	34.4	-9.5	11.8	-35.86	-27	-8.86	18	174	V
1	5.725	-72.48	Pk	34.5	-9.4	11.8	-35.58	26.99	-62.57	18	174	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

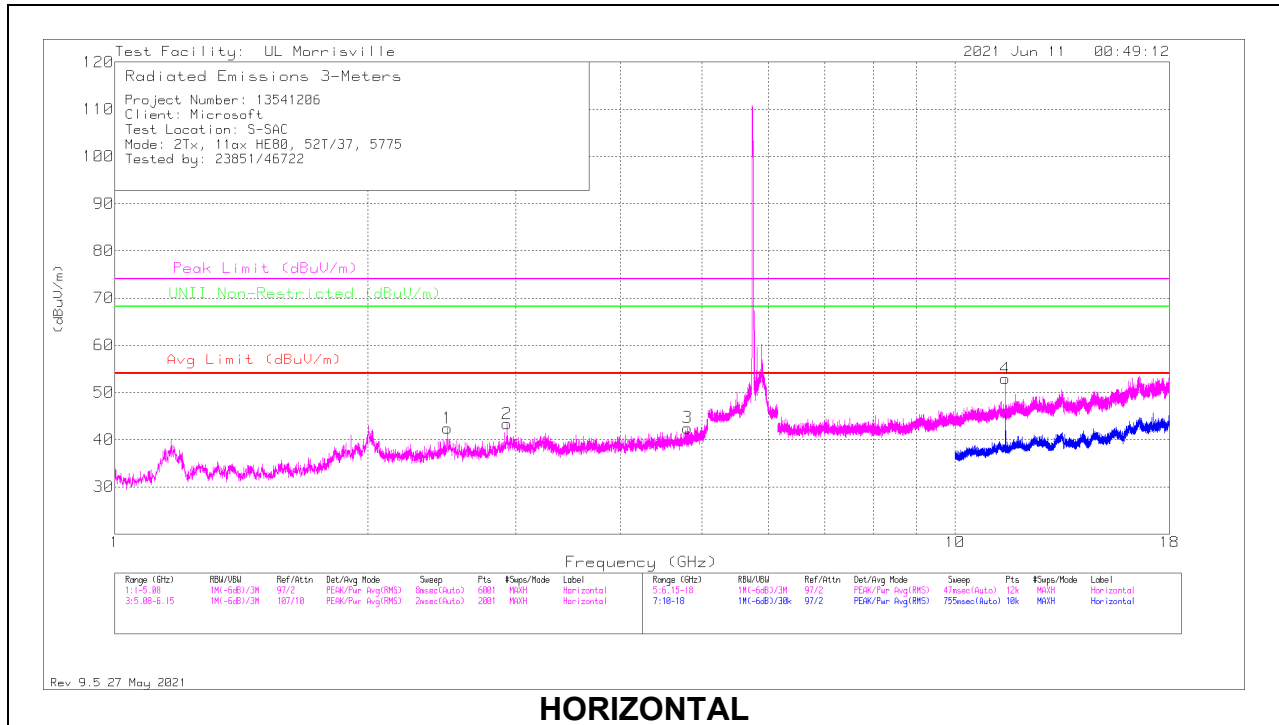

HORIZONTAL

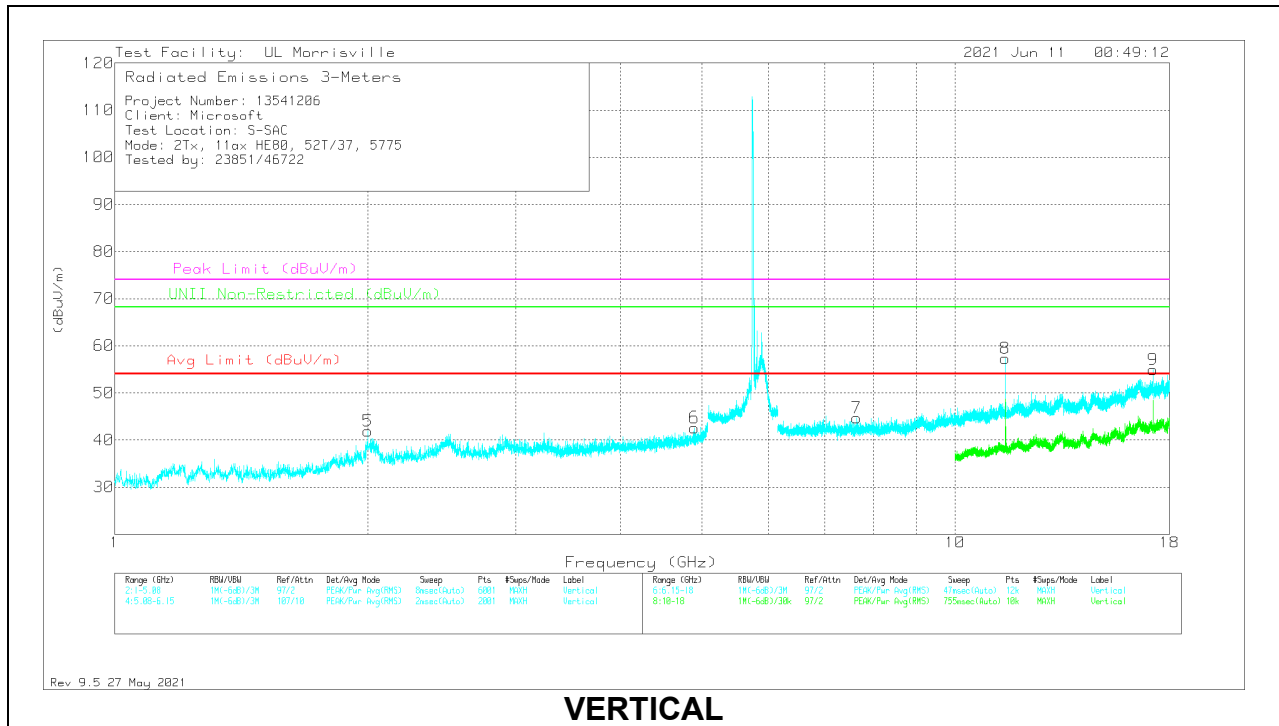

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.49056	43.9	Pk	32.4	-33.9	42.4	54	-11.6	74	-31.6	-	-	0-360	101	H
3	*** 4.80324	39.1	Pk	34.1	-30.7	42.5	54	-11.5	74	-31.5	-	-	0-360	101	H
6	*** 4.89232	38.63	Pk	34.1	-30.1	42.63	54	-11.37	74	-31.37	-	-	0-360	101	V
4	*** 11.47707	44.74	PK-U	38.1	-24.6	58.24	-	-	74	-15.76	-	-	46	259	H
	*** 11.4758	32.13	ADV	38.1	-24.5	45.73	54	-8.27	-	-	-	-	46	259	H
7	*** 7.64014	36.87	Pk	35.7	-27.9	44.67	54	-9.33	74	-29.33	-	-	0-360	200	V
8	*** 11.47879	48.86	PK-U	38.1	-24.6	62.36	-	-	74	-11.64	-	-	349	263	V
	*** 11.47651	35.62	ADV	38.1	-24.5	49.22	54	-4.78	-	-	-	-	349	263	V
5	2.00028	44.57	Pk	31.5	-34.2	41.87	-	-	-	-	68.2	-26.33	0-360	200	V
2	2.93188	43.84	Pk	33.1	-33.6	43.34	-	-	-	-	68.2	-24.86	0-360	101	H
9	17.21398	43.54	PK-U	41.5	-24.1	60.94	-	-	74	-13.06	68.2	-7.26	354	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

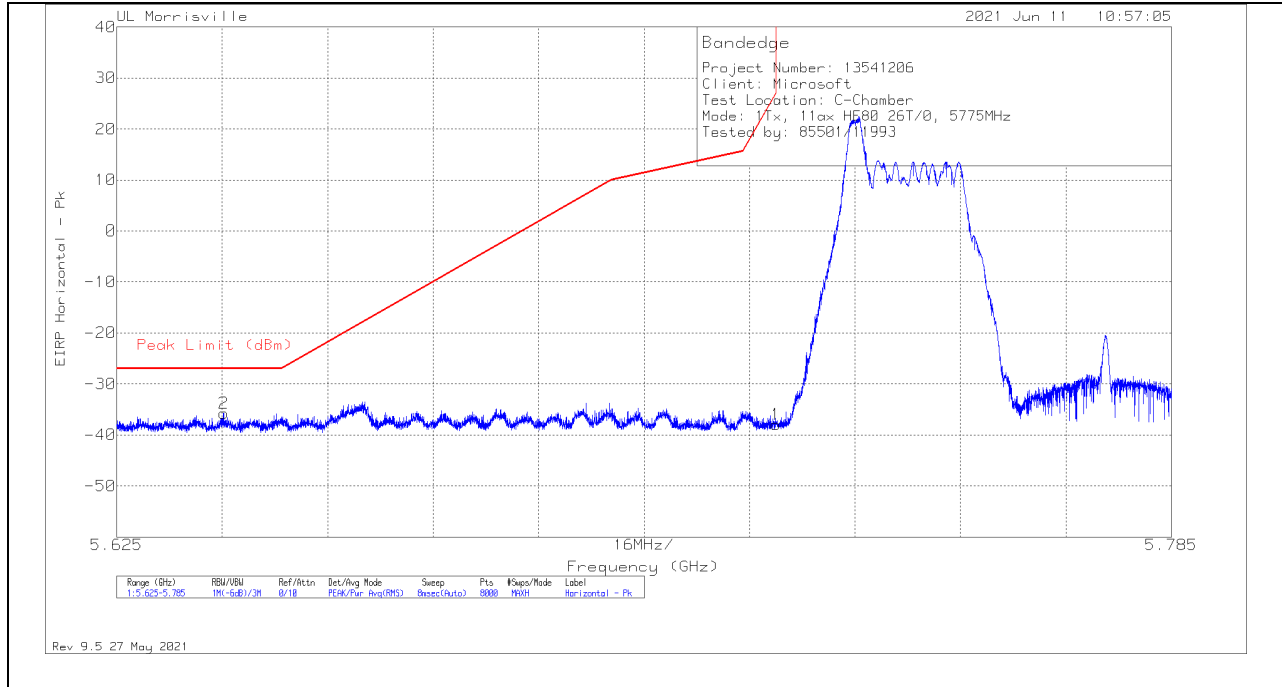

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6412	-72.48	Pk	34.4	-9.5	11.8	-35.78	-27	-8.78	25	265	H
1	5.725	-74.88	Pk	34.5	-9.4	11.8	-37.98	26.99	-64.97	25	265	H

Pk - Peak detector

VERTICAL RESULT

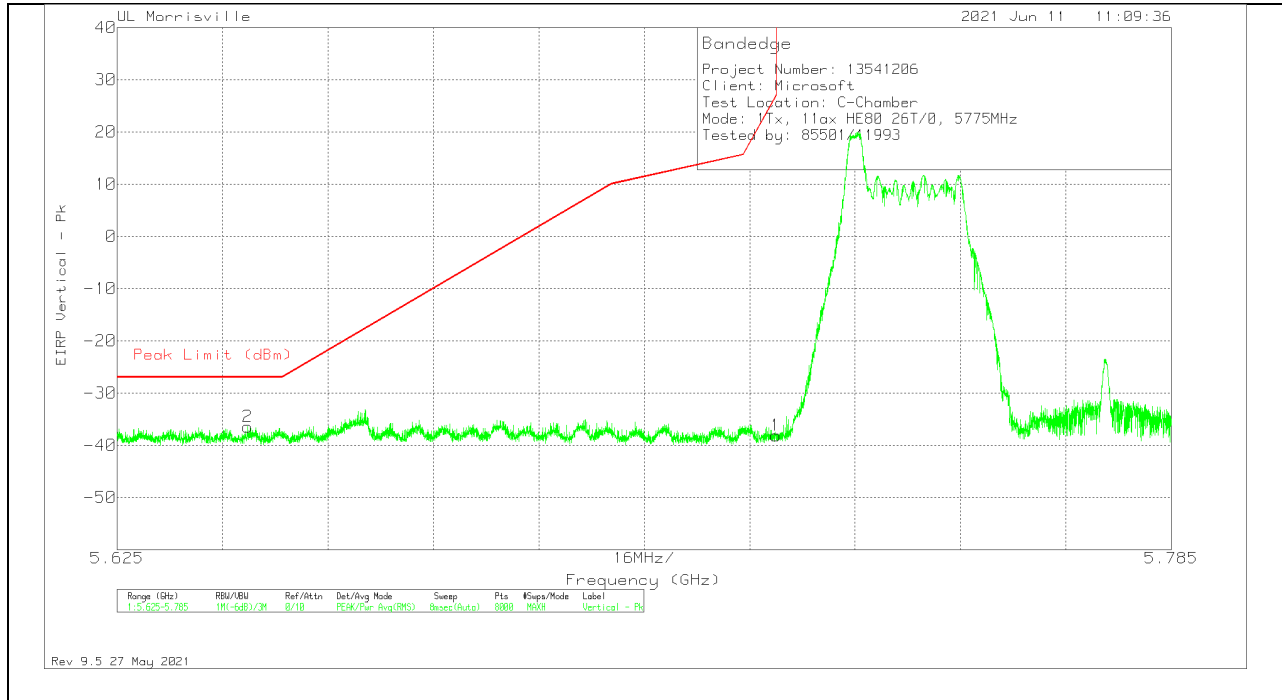


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64478	-73.15	Pk	34.4	-9.5	11.8	-36.45	-27	-9.45	33	273	V
1	5.725	-75.04	Pk	34.5	-9.4	11.8	-38.14	26.99	-65.13	33	273	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

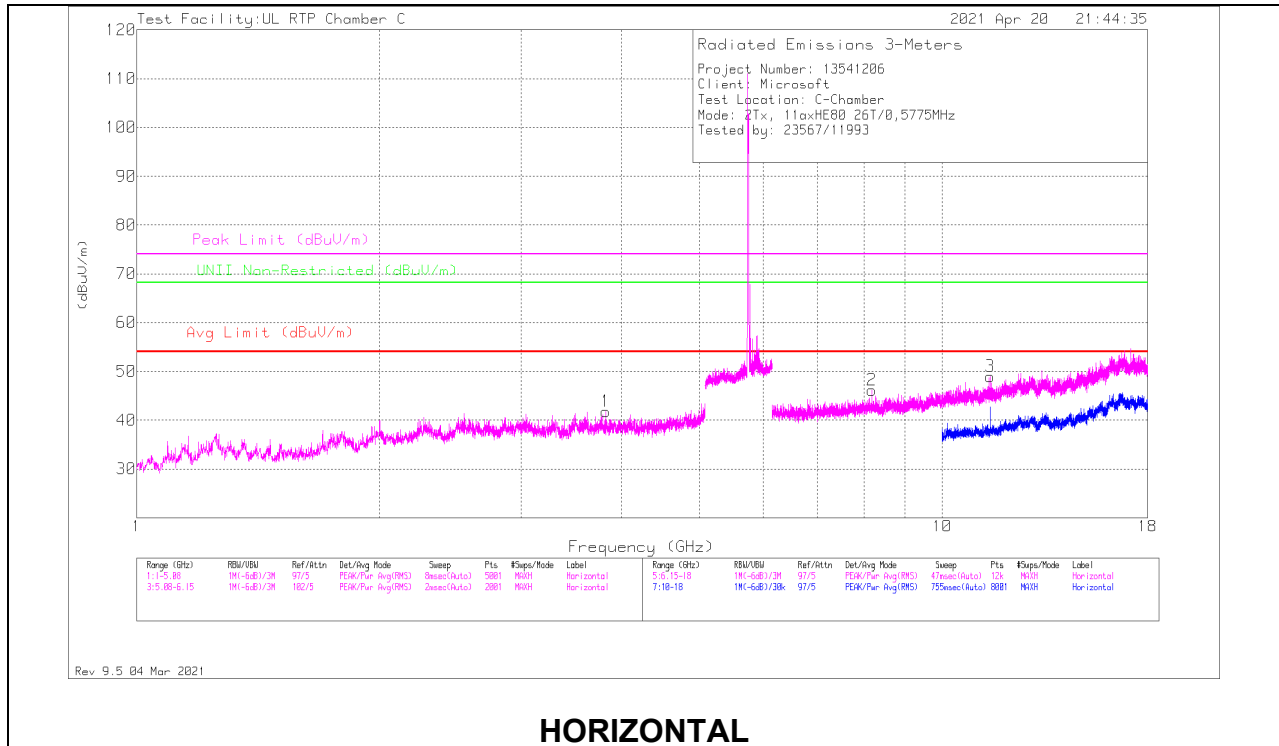

HORIZONTAL

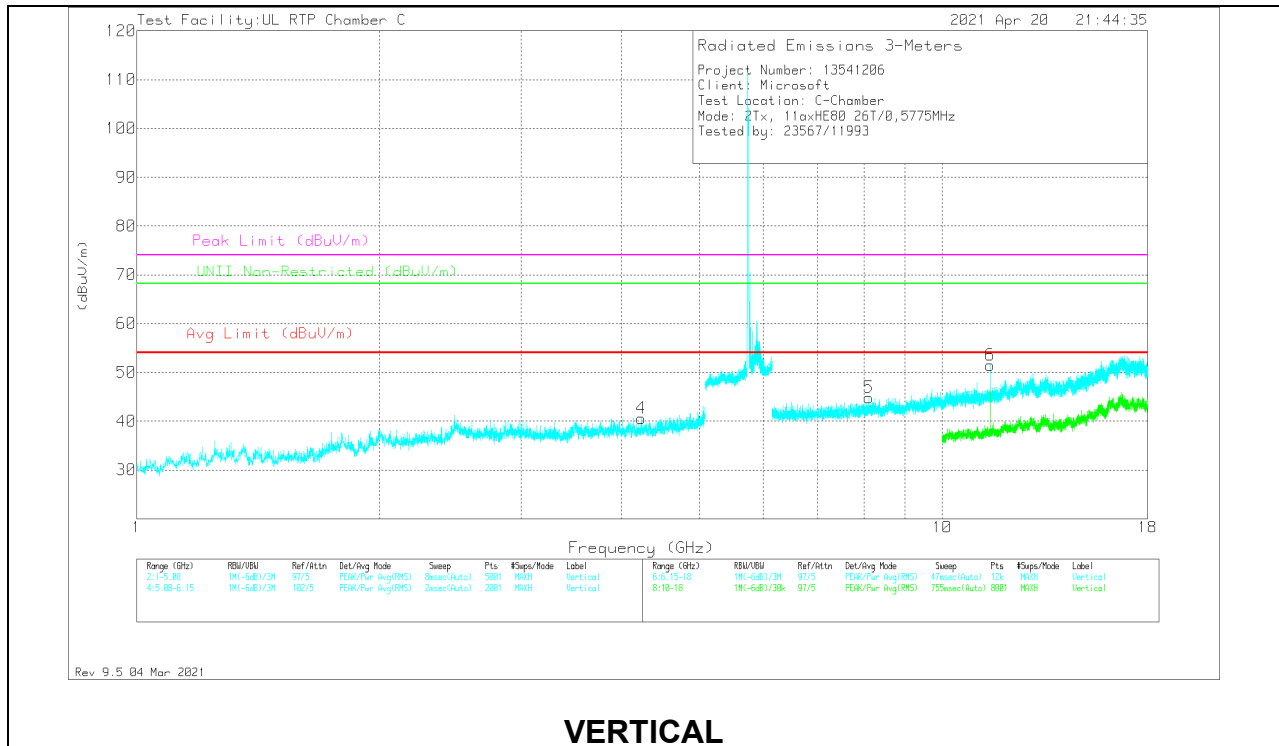

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 3.82254	56.47	Pk	33.5	-48.2	41.77	54	-12.23	74	-32.23	-	-	0-360	101	H
4	*** 4.23299	54.29	Pk	33.5	-47.2	40.59	54	-13.41	74	-33.41	-	-	0-360	200	V
2	*** 8.17635	53.6	Pk	36	-43.5	46.1	54	-7.9	74	-27.9	-	-	0-360	101	H
3	*** 11.47337	53.47	PK-U	38.4	-39.5	52.37	-	-	74	-21.63	-	-	265	149	H
	*** 11.47404	41.78	ADV	38.4	-39.5	40.68	54	-13.32	-	-	-	-	265	149	H
5	*** 8.11414	51.67	Pk	36	-42.9	44.77	54	-9.23	74	-29.23	-	-	0-360	101	V
6	*** 11.47412	56.06	PK-U	38.4	-39.5	54.96	-	-	74	-19.04	-	-	165	272	V
	*** 11.47422	44.94	ADV	38.4	-39.5	43.84	54	-10.16	-	-	-	-	165	272	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 484-Tones, RU Index 66

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

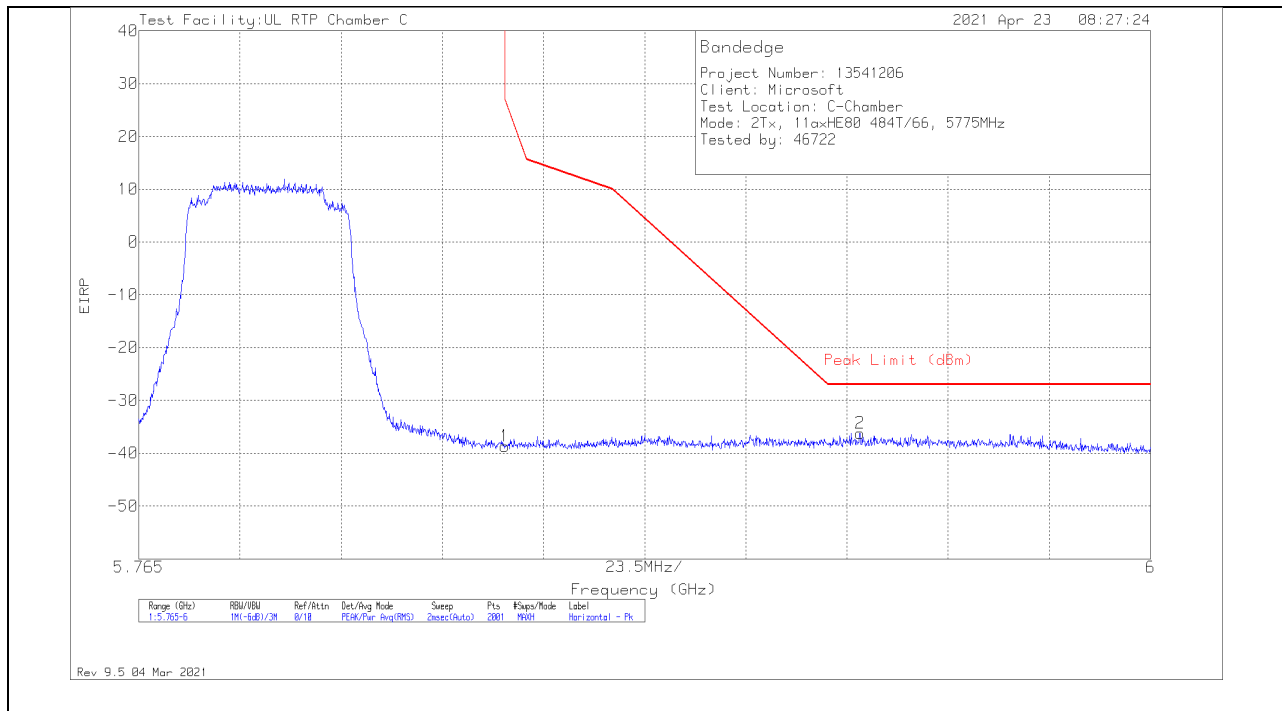

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-73.67	PK	35.1	-11.9	11.8	-38.67	26.84	-65.51	200	219	H
2	5.93256	-71.43	PK	35.3	-11.9	11.8	-36.23	-27	-9.23	200	219	H

Pk - Peak detector

VERTICAL RESULT

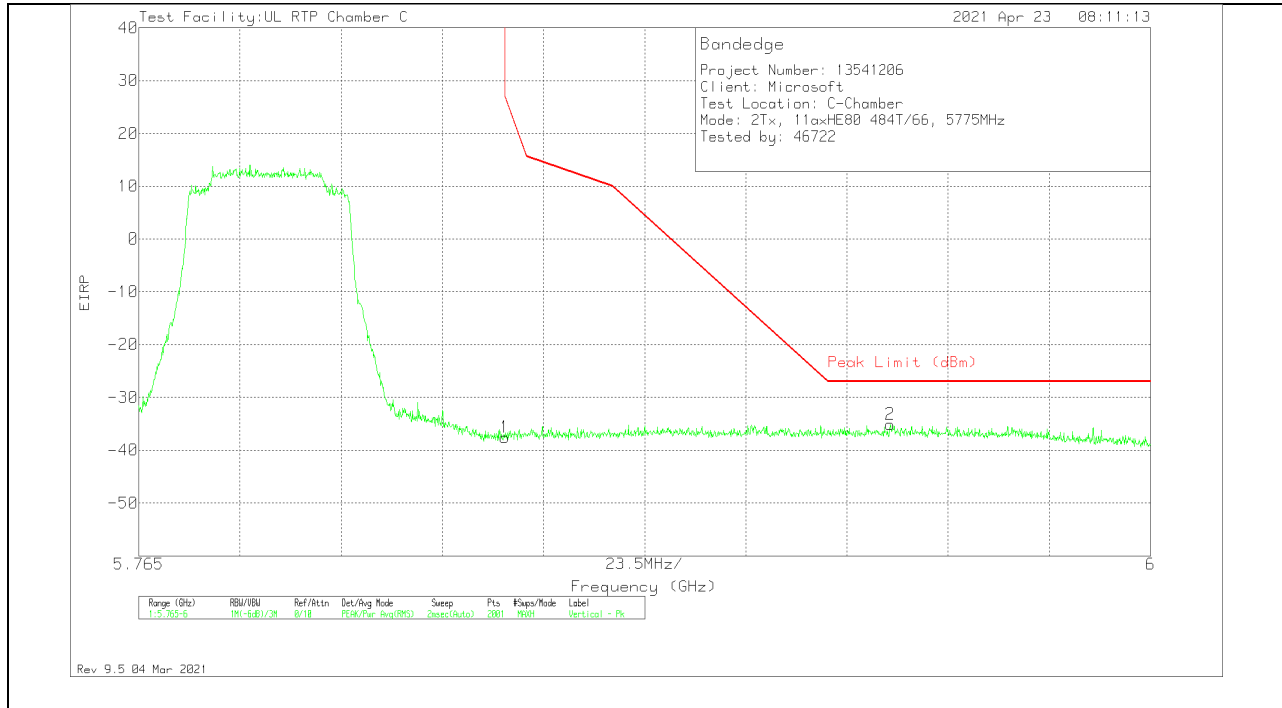


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-72.57	Pk	35.1	-11.9	11.8	-37.57	26.84	-64.41	211	391	V
2	5.93949	-70.32	Pk	35.3	-11.9	11.8	-35.12	-27	-8.12	211	391	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 242-Tones, RU Index 64

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

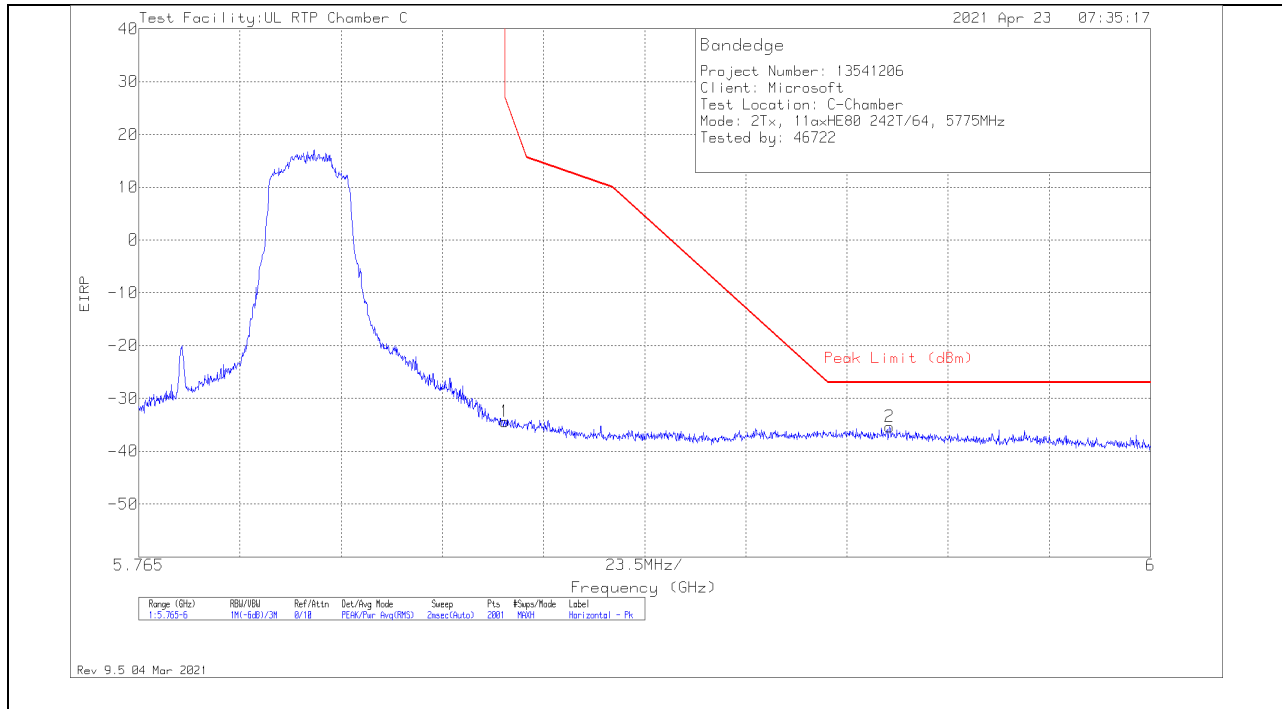

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-69.41	Pk	35.1	-11.9	11.8	-34.41	26.84	-61.25	188	209	H
2	5.93937	-70.53	Pk	35.3	-11.9	11.8	-35.33	-27	-8.33	188	209	H

Pk - Peak detector

VERTICAL RESULT

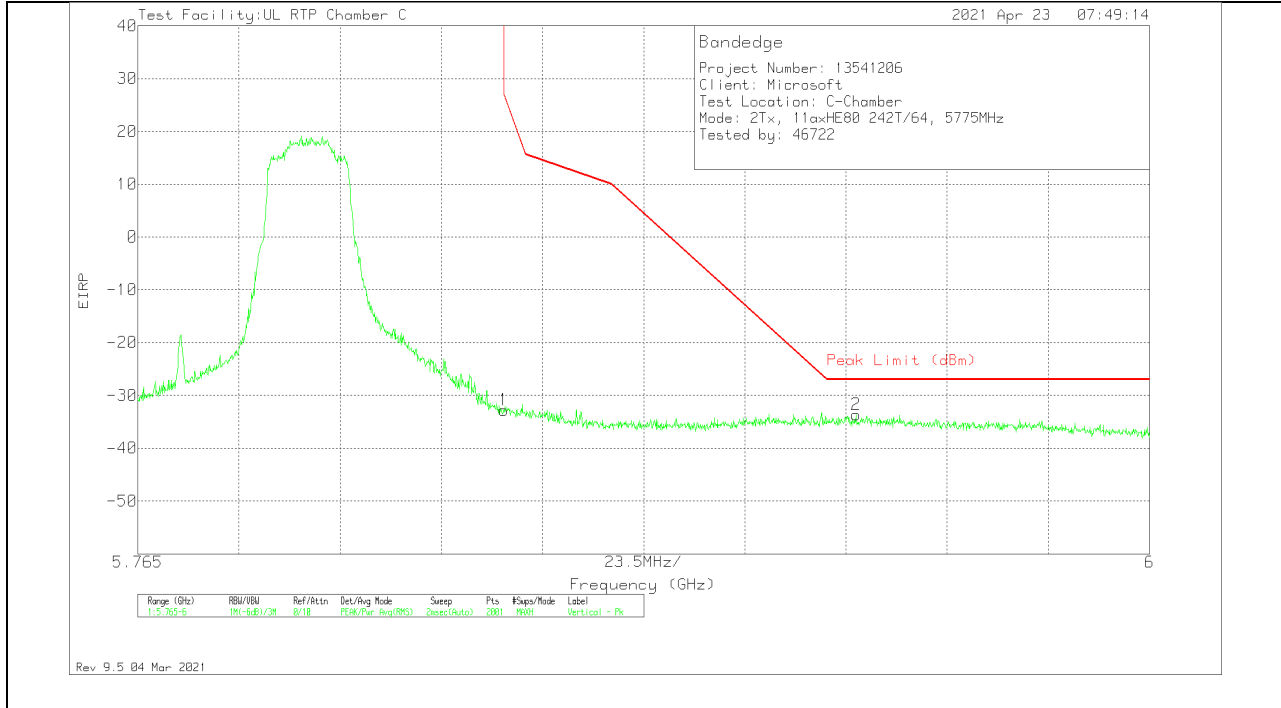


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-67.83	Pk	35.1	-11.9	11.8	-32.83	26.84	-59.67	196	182	V
2	5.93185	-68.81	Pk	35.3	-11.9	11.8	-33.61	-27	-6.61	196	182	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

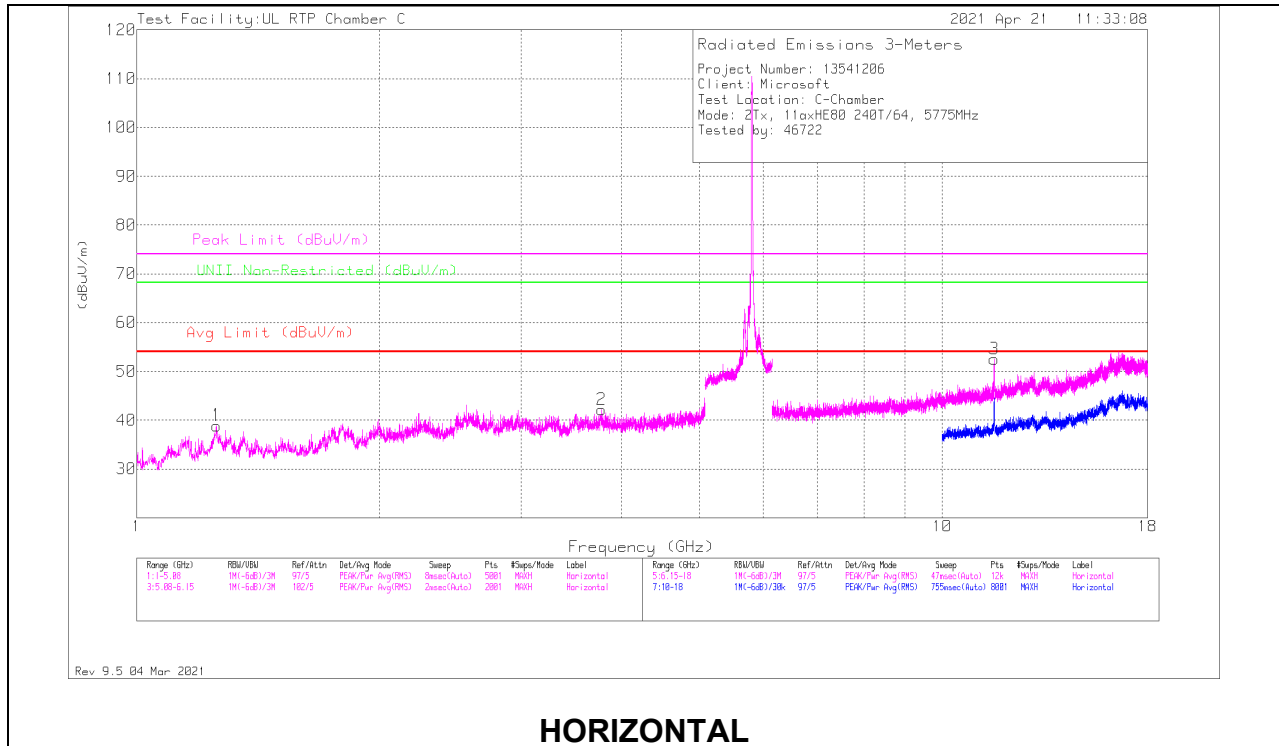

HORIZONTAL

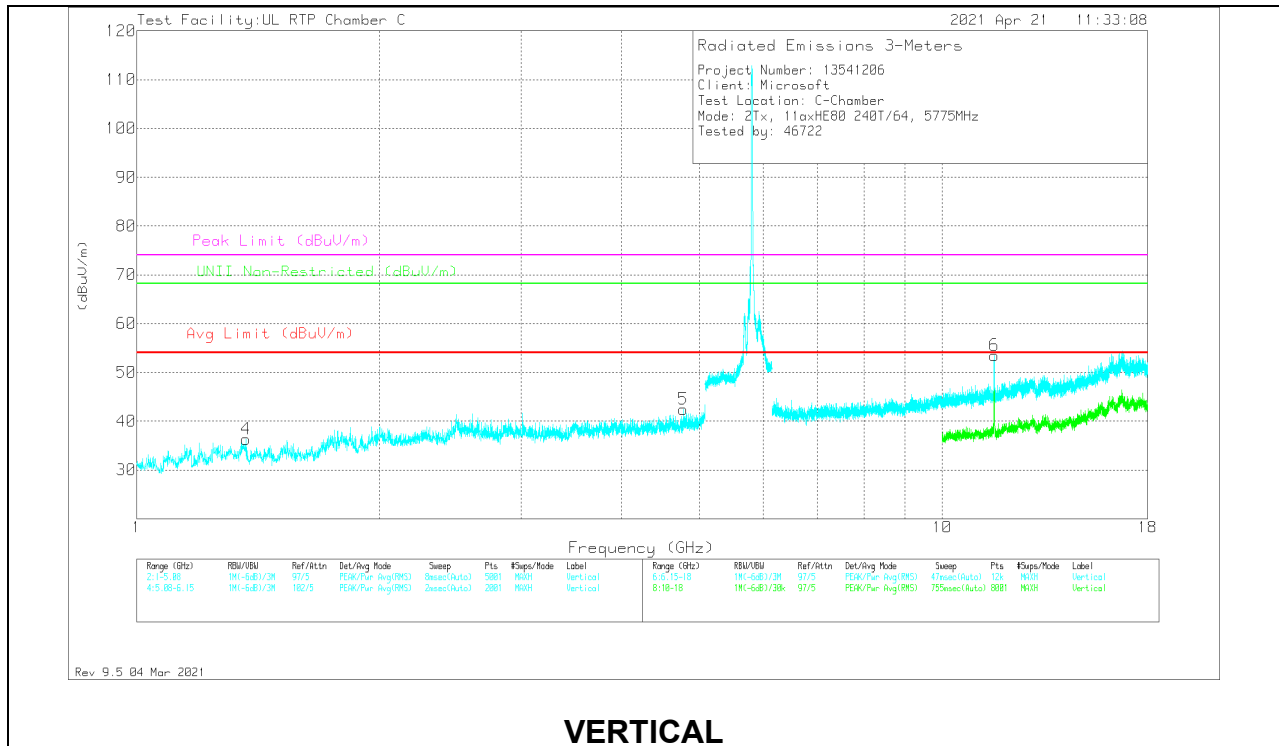

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.25541	64.21	Pk	28.4	-53.7	38.91	54	-15.09	74	-35.09	-	-	0-360	101	H
2	*** 3.77766	55.89	Pk	33.5	-47.2	42.19	54	-11.81	74	-31.81	-	-	0-360	101	H
4	*** 1.36557	60.54	Pk	29	-53.2	36.34	54	-17.66	74	-37.66	-	-	0-360	200	V
5	*** 4.77155	55.75	Pk	34.2	-47.5	42.45	54	-11.55	74	-31.55	-	-	0-360	101	V
3	*** 11.61303	57.51	PK-U	38.5	-39.7	56.31	-	-	74	-17.69	-	-	166	101	H
	*** 11.60931	45.34	ADV	38.5	-39.4	44.44	54	-9.56	-	-	-	-	166	101	H
6	*** 11.60882	57.5	PK-U	38.5	-39.3	56.7	-	-	74	-17.3	-	-	211	241	V
	*** 11.6098	44.79	ADV	38.5	-39.4	43.89	54	-10.11	-	-	-	-	211	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 60

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

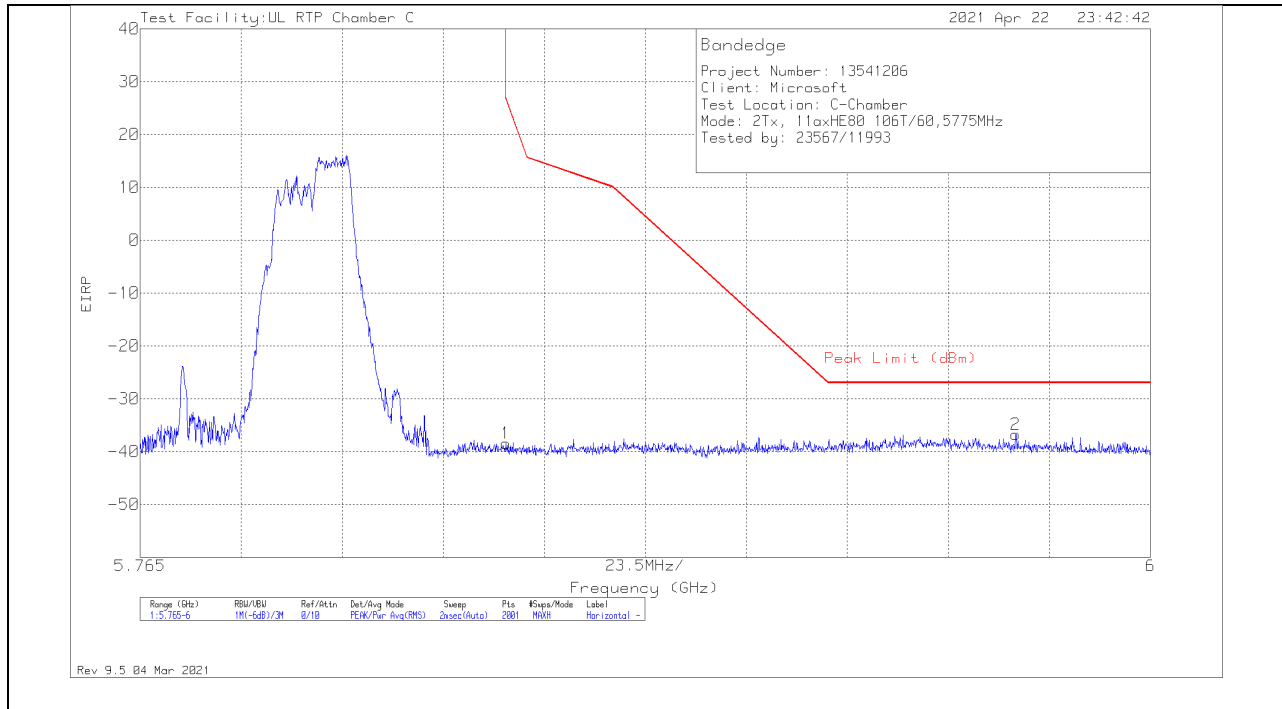

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-73.45	Pk	35.1	-11.9	11.8	-38.45	26.84	-65.29	20	367	H
2	5.96863	-72.09	Pk	35.4	-11.9	11.8	-36.79	-27	-9.79	20	367	H

Pk - Peak detector

VERTICAL RESULT

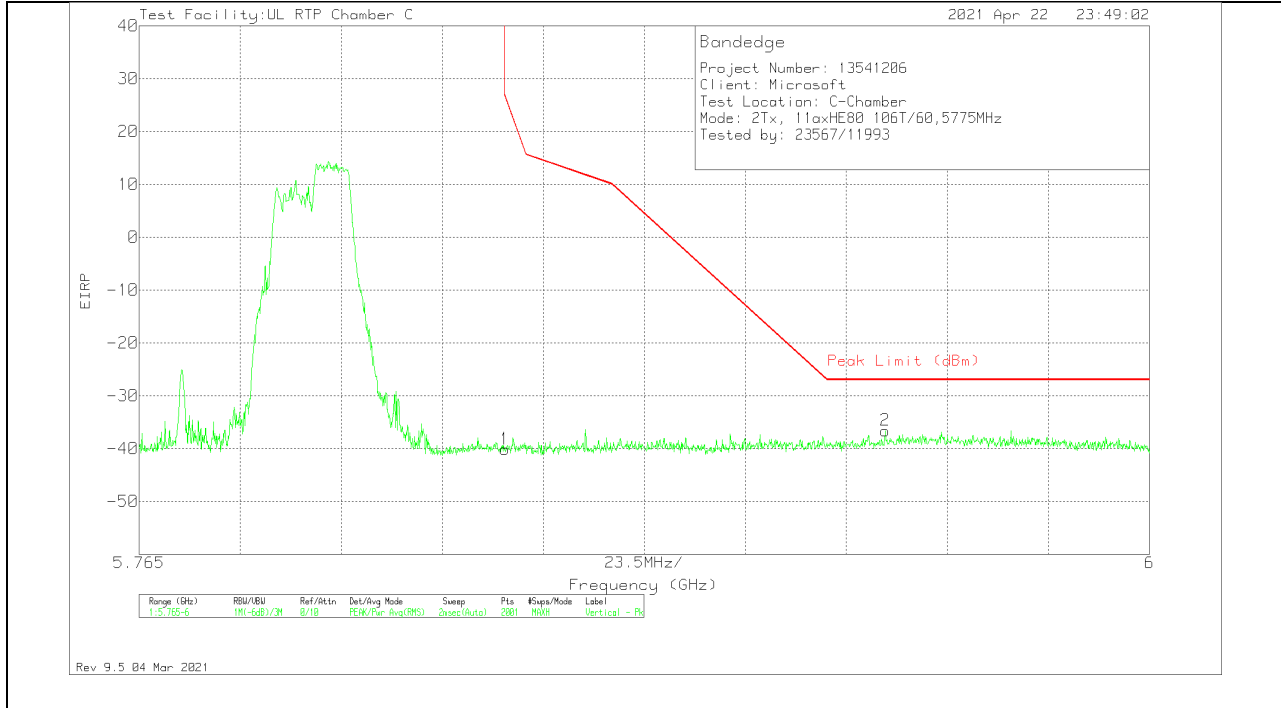


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-75.13	Pk	35.1	-11.9	11.8	-40.13	26.84	-66.97	34	157	V
2	5.93855	-71.79	Pk	35.3	-11.9	11.8	-36.59	-27	-9.59	34	157	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 52

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

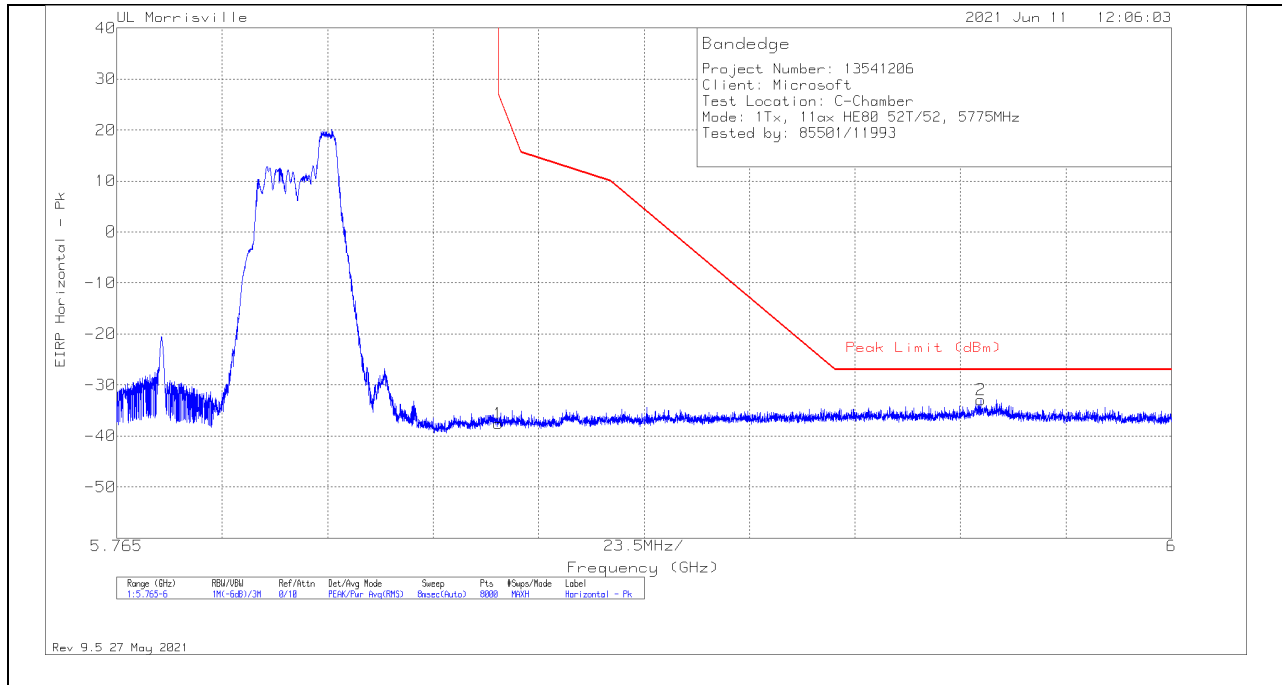

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-74.66	Pk	34.7	-9.4	11.8	-37.56	26.95	-64.51	30	164	H
2	5.95752	-70.5	Pk	35.1	-9.3	11.8	-32.9	-27	-5.9	30	164	H

Pk - Peak detector

VERTICAL RESULT

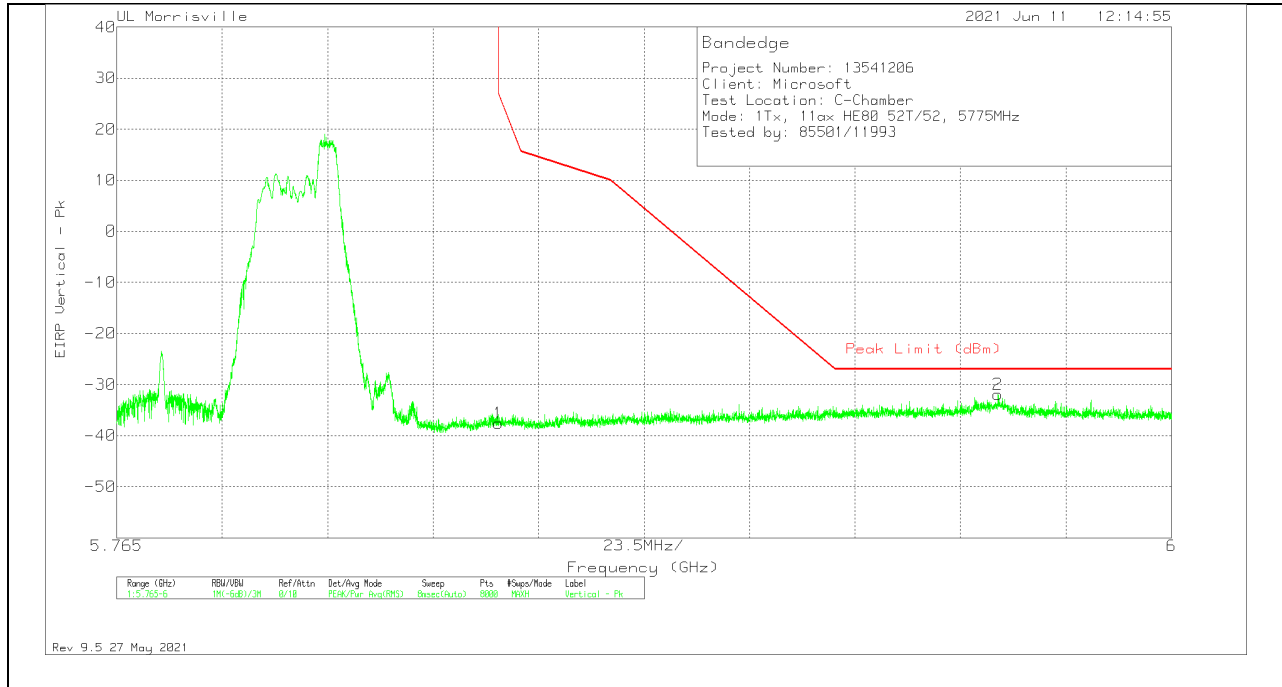


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-74.72	Pk	34.7	-9.4	11.8	-37.62	26.95	-64.57	34	118	V
2	5.96137	-69.5	Pk	35.1	-9.3	11.8	-31.9	-27	-4.9	34	118	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

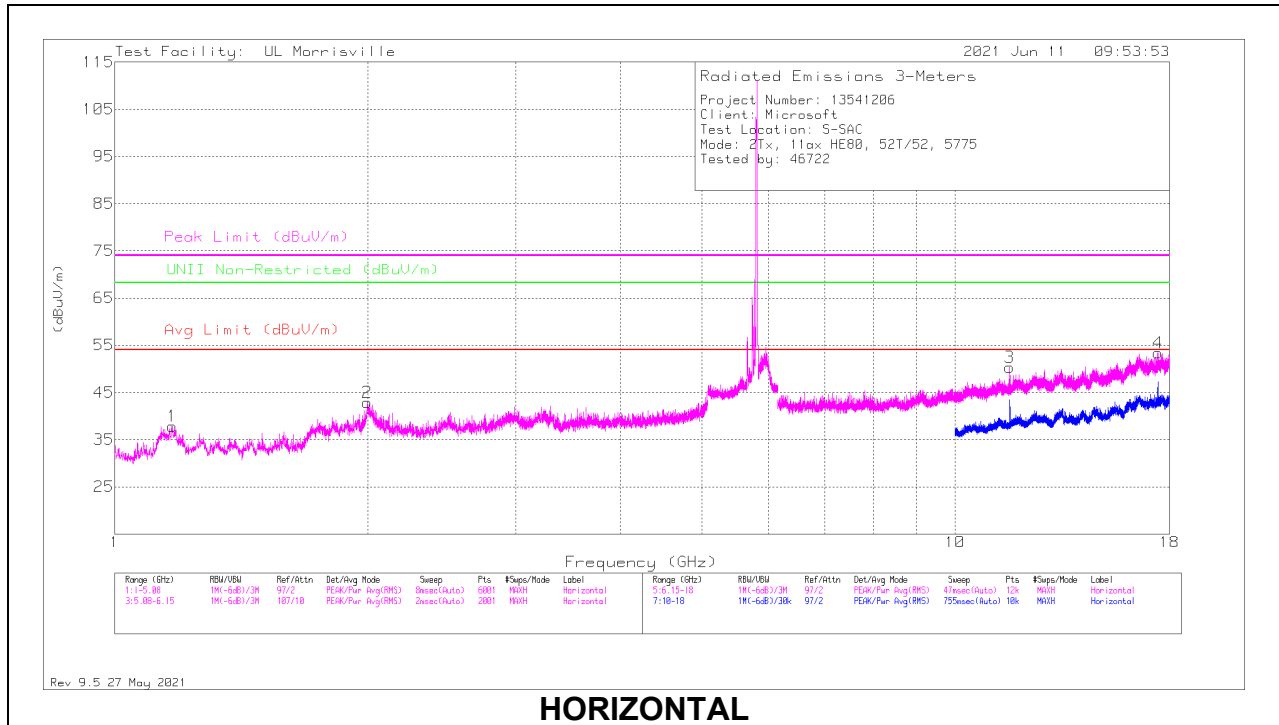

HORIZONTAL

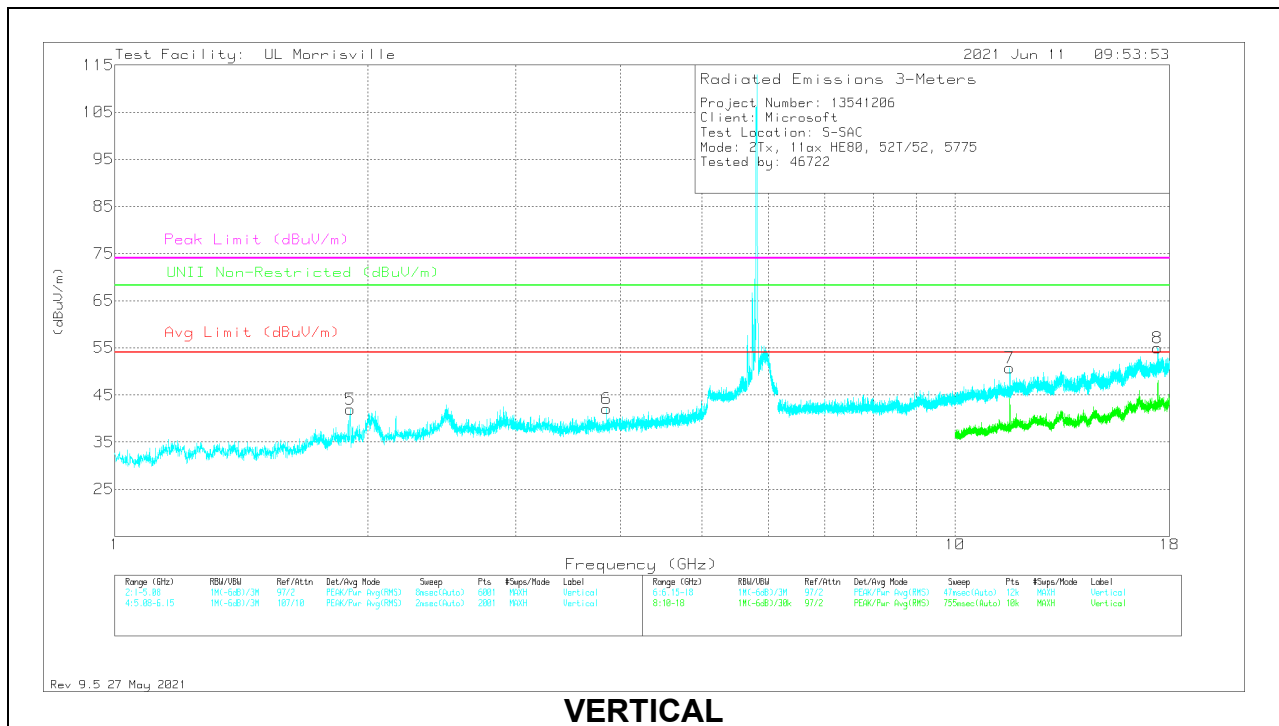

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.17136	45.05	Pk	28.1	-35.3	37.85	54	-16.15	74	-36.15	-	-	0-360	101	H
5	** 1.90644	45.34	Pk	30.9	-34.3	41.94	54	-12.06	74	-32.06	68.2	-26.26	0-360	101	V
6	*** 3.84716	41.25	Pk	33.4	-32.6	42.05	54	-11.95	74	-31.95	-	-	0-360	101	V
3	*** 11.62213	39.1	PK-U	38.2	-24.9	52.4	-	-	74	-21.6	-	-	357	165	H
	*** 11.62336	26.35	ADV	38.2	-24.9	39.65	54	-14.35	-	-	-	-	357	165	H
7	*** 11.62393	40.08	PK-U	38.2	-24.9	53.38	-	-	74	-20.62	-	-	26	161	V
	*** 11.62377	27.98	ADV	38.2	-24.9	41.28	54	-12.72	-	-	-	-	26	161	V
2	1.9962	45.72	Pk	31.4	-34.2	42.92	54	-11.08	74	-31.08	68.2	-25.28	0-360	199	H
8	17.43494	41.4	PK-U	41.4	-24	58.8	-	-	-	-	68.2	-9.4	82	226	V
4	17.43854	35.78	PK-U	41.4	-24	53.18	-	-	-	-	68.2	-15.02	357	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

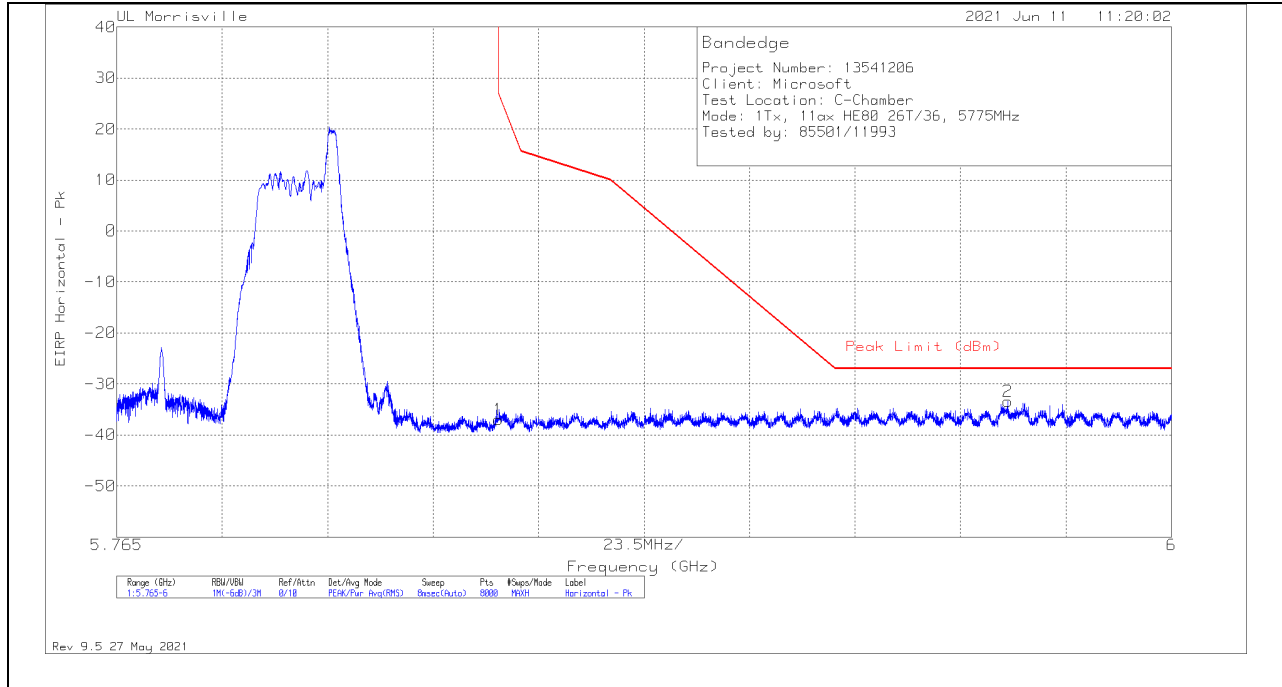

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-74.1	Pk	34.7	-9.4	11.8	-37	26.95	-63.95	20	297	H
2	5.96348	-71.03	Pk	35.1	-9.3	11.8	-33.43	-27	-6.43	20	297	H

Pk - Peak detector

VERTICAL RESULT

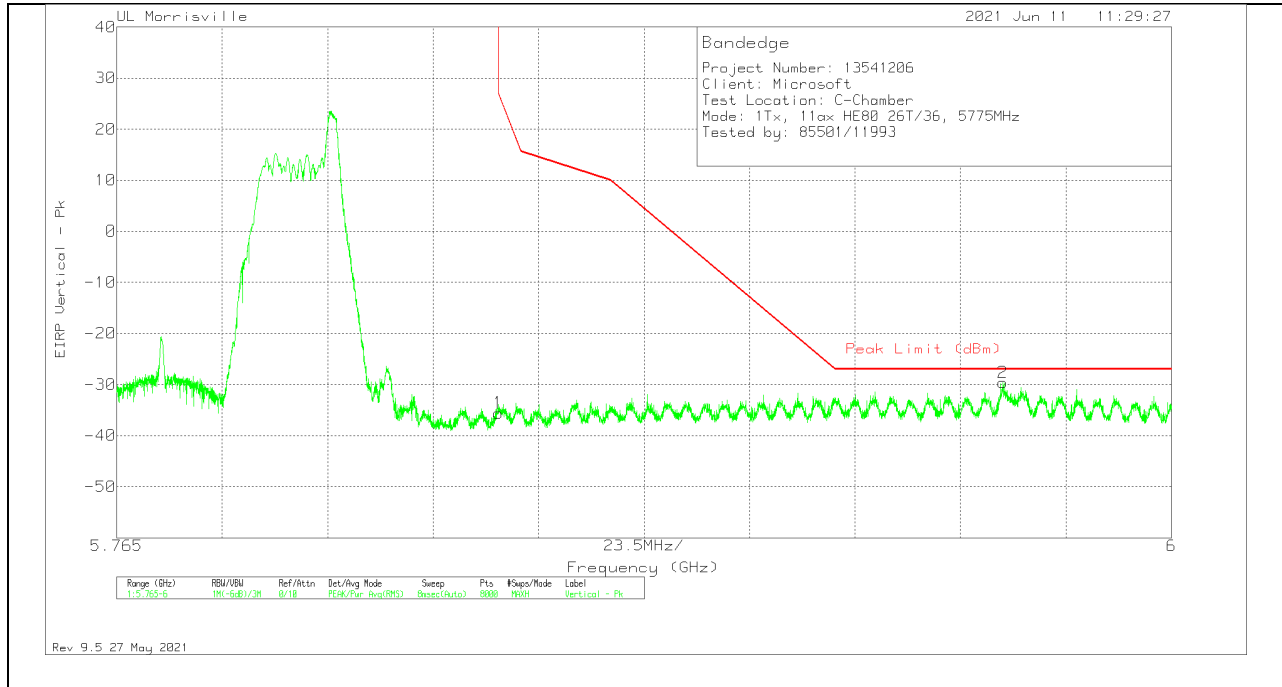


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-72.66	Pk	34.7	-9.4	11.8	-35.56	26.95	-62.51	18	297	V
2	5.96246	-67.18	Pk	35.1	-9.3	11.8	-29.58	-27	-2.58	18	297	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

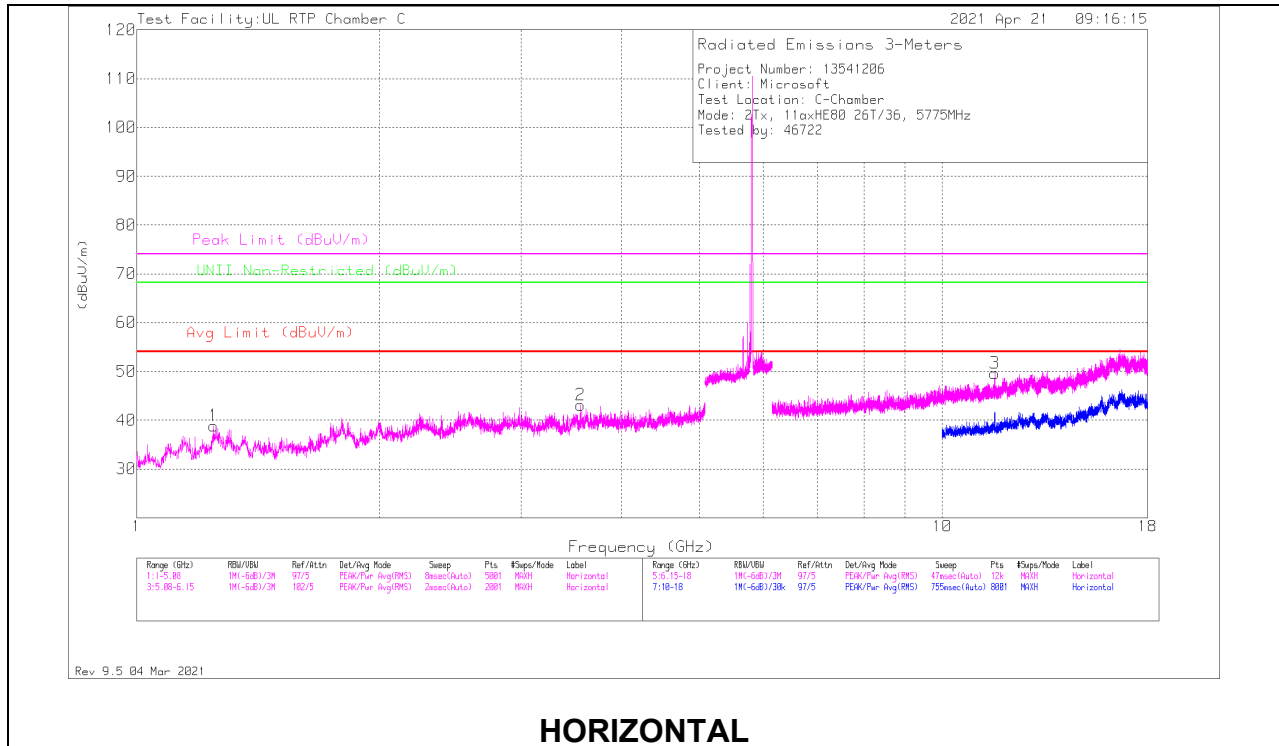

HORIZONTAL

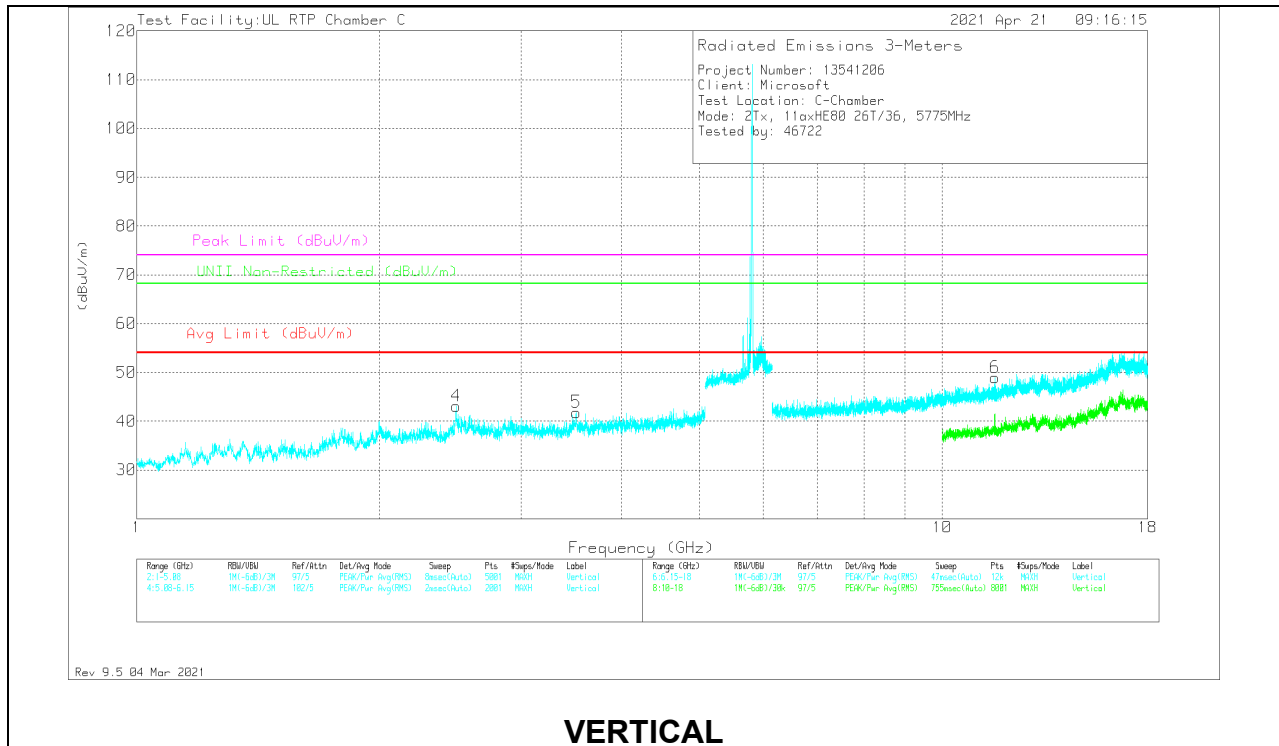

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.24643	64.25	Pk	28.2	-53.6	38.85	54	-15.15	74	-35.15	-	-	0-360	101	H
2	** 3.5549	58.48	Pk	33.2	-48.6	43.08	54	-10.92	74	-30.92	-	-	0-360	101	H
4	** 2.49246	60.63	Pk	32.7	-50.2	43.13	54	-10.87	74	-30.87	-	-	0-360	200	V
5	** 3.51573	56.43	Pk	34	-48.6	41.83	54	-12.17	74	-32.17	-	-	0-360	101	V
3	** 11.62631	54.03	PK-U	38.5	-39.1	53.43	-	-	74	-20.57	-	-	166	103	H
	** 11.62601	42.45	ADV	38.5	-39.1	41.85	54	-12.15	-	-	-	-	166	103	H
6	** 11.62602	54.5	PK-U	38.5	-39.1	53.9	-	-	74	-20.1	-	-	155	221	V
	** 11.62605	42.53	ADV	38.5	-39.1	41.93	54	-12.07	-	-	-	-	155	221	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average


2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID

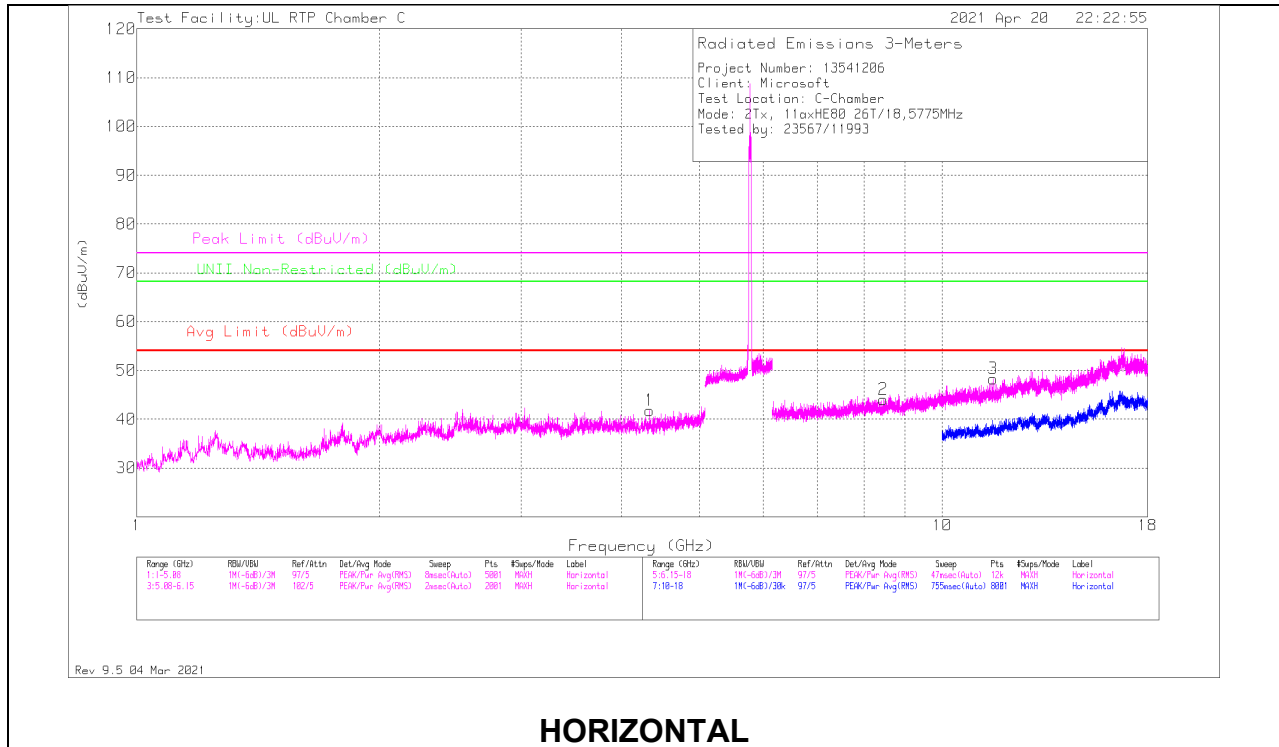

HORIZONTAL

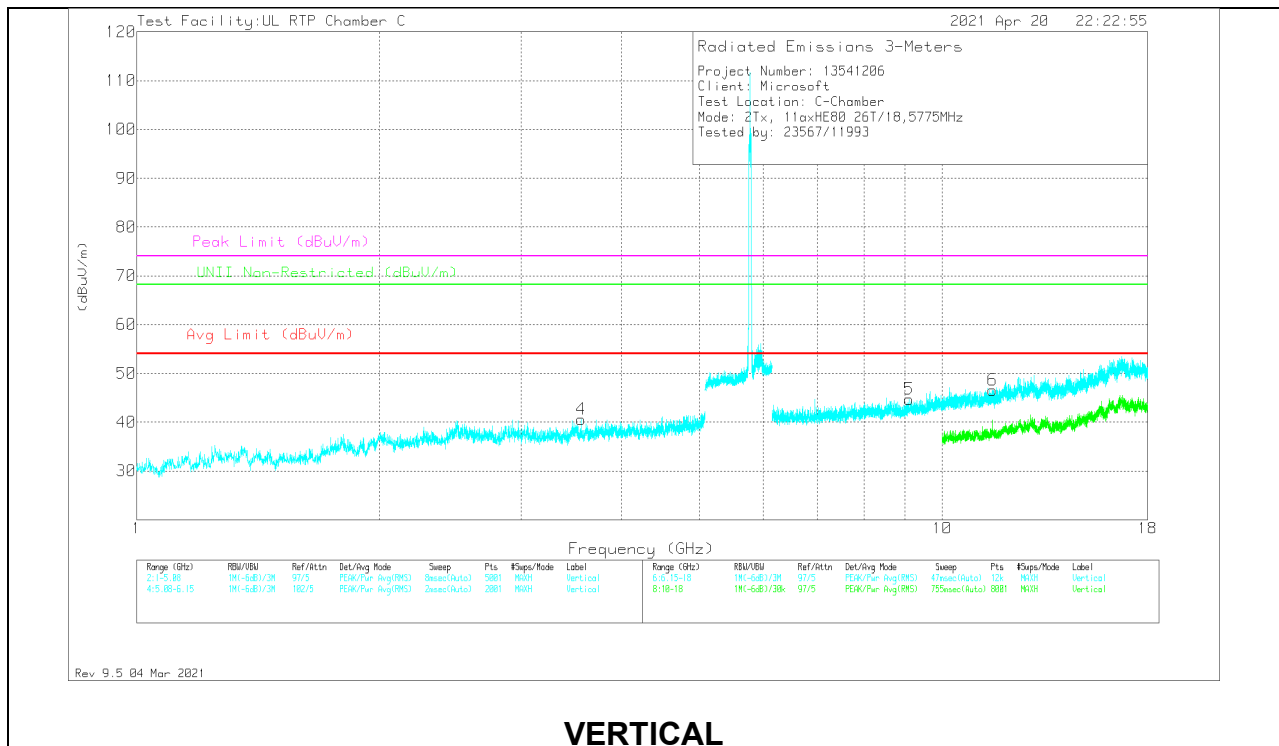

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.33173	55.49	Pk	33.7	-47.4	41.79	54	-12.21	74	-32.21	-	-	0-360	101	H
4	* ** 3.5655	55.62	Pk	33.2	-48.3	40.52	54	-13.48	74	-33.48	-	-	0-360	101	V
2	* ** 8.44693	50.58	Pk	35.9	-42.4	44.08	54	-9.92	74	-29.92	-	-	0-360	101	H
3	* ** 11.56895	49.34	PK-U	38.4	-39.1	48.64	-	-	74	-25.36	-	-	186	101	H
	* ** 11.56653	37.05	ADV	38.4	-38.9	36.55	54	-17.45	-	-	-	-	186	101	H
5	* ** 9.09473	50.97	Pk	36.4	-42.7	44.67	54	-9.33	74	-29.33	-	-	0-360	199	V
6	* ** 11.54866	47.7	Pk	38.4	-39.5	46.6	54	-7.4	74	-27.4	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average


2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 44

HARMONICS AND SPURIOUS EMISSIONS

MID

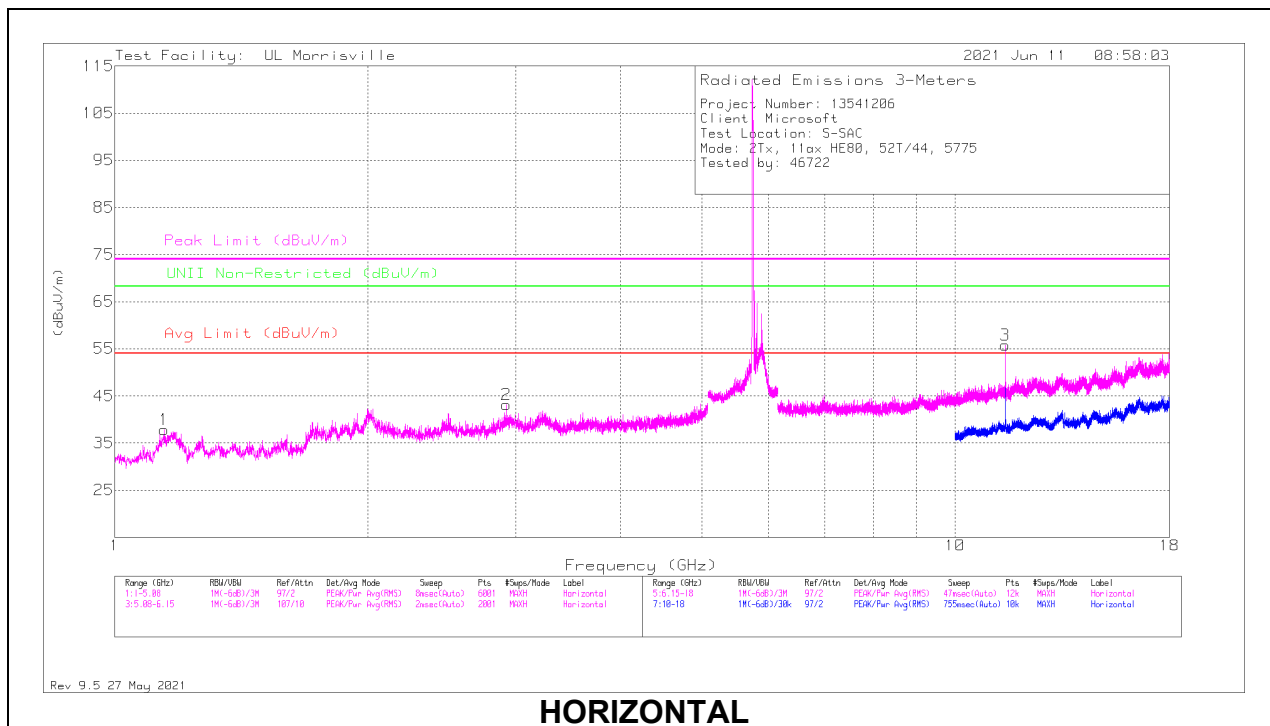

HORIZONTAL

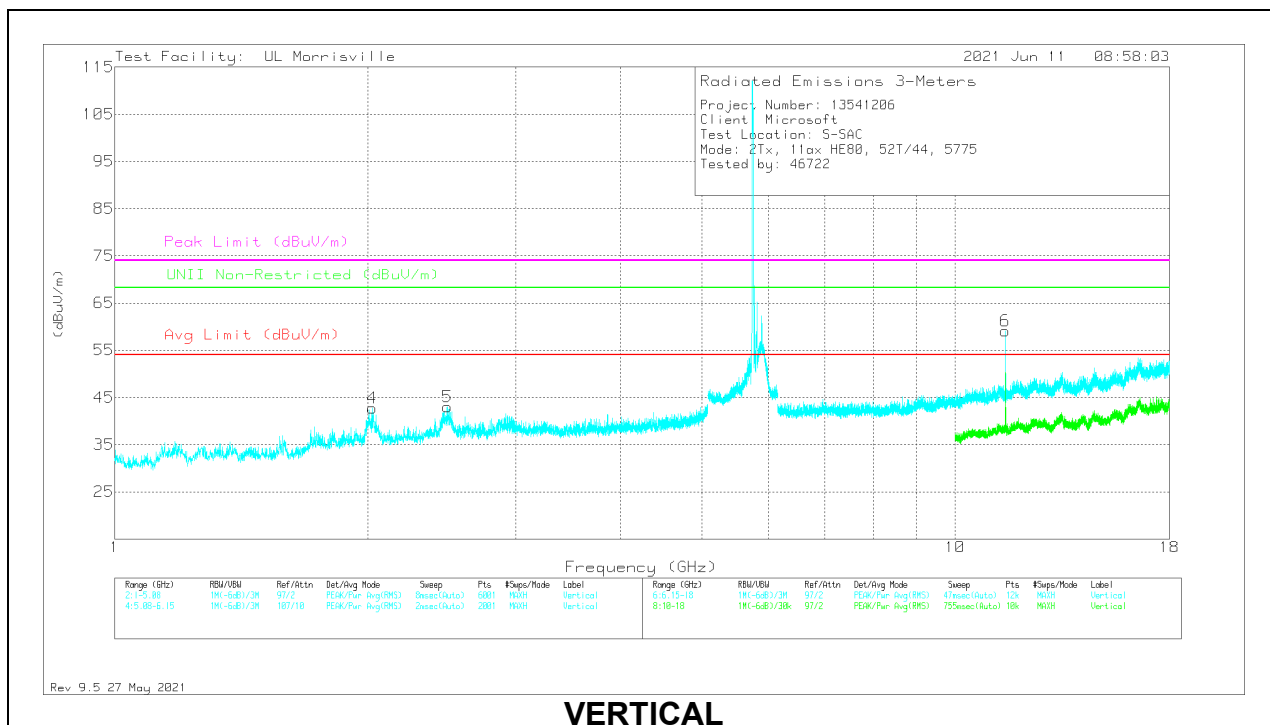

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 1.14416	45.36	Pk	27.8	-35.3	37.86	54	-16.14	74	-36.14	-	-	0-360	101	H
4	** 2.02408	45.95	Pk	31.1	-34.3	42.75	54	-11.25	74	-31.25	68.2	-25.45	0-360	199	V
5	* ** 2.48784	44.44	Pk	32.5	-33.9	43.04	54	-10.96	74	-30.96	-	-	0-360	101	V
3	* ** 11.47591	44.25	PK-U	38.1	-24.5	57.85	-	-	74	-16.15	-	-	2	220	H
	* ** 11.47613	31.43	ADV	38.1	-24.5	45.03	54	-8.97	-	-	-	-	2	220	H
6	* ** 11.47602	49.12	PK-U	38.1	-24.5	62.72	-	-	74	-11.28	-	-	350	308	V
	* ** 11.47597	36.34	ADV	38.1	-24.5	49.94	54	-4.06	-	-	-	-	350	308	V
2	2.92372	43.55	Pk	33.1	-33.5	43.15	-	-	-	-	68.2	-25.05	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna A OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

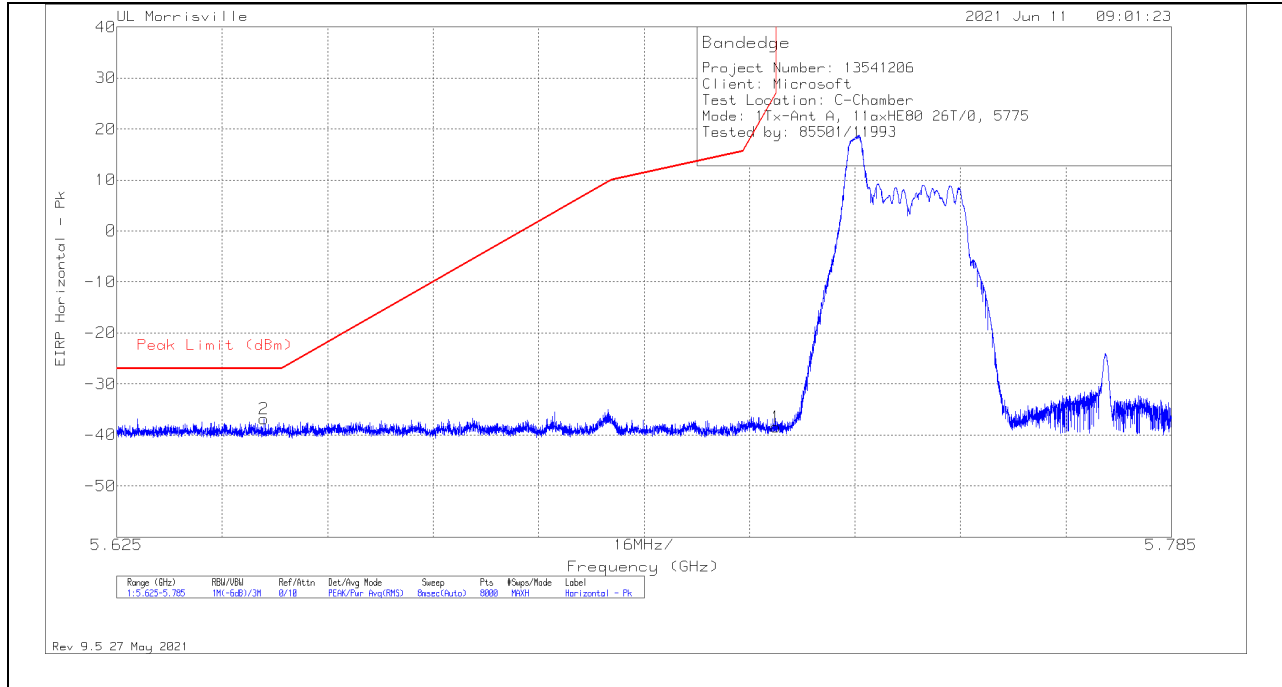

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6473	-73.59	Pk	34.4	-9.5	11.8	-36.89	-27	-9.89	180	100	H
1	5.725	-75.33	Pk	34.5	-9.4	11.8	-38.43	26.99	-65.42	180	100	H

Pk - Peak detector

VERTICAL RESULT


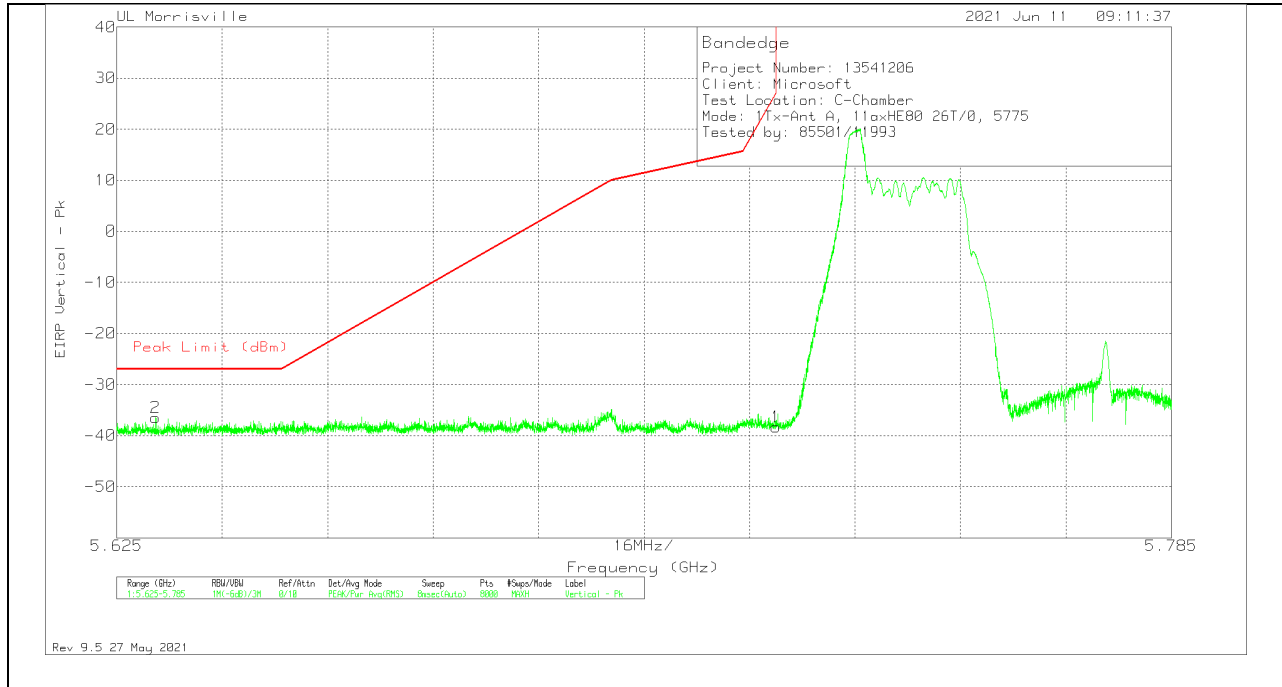


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63092	-73.16	Pk	34.4	-9.5	11.8	-36.46	-27	-9.46	211	119	V
1	5.725	-75.18	Pk	34.5	-9.4	11.8	-38.28	26.99	-65.27	211	119	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

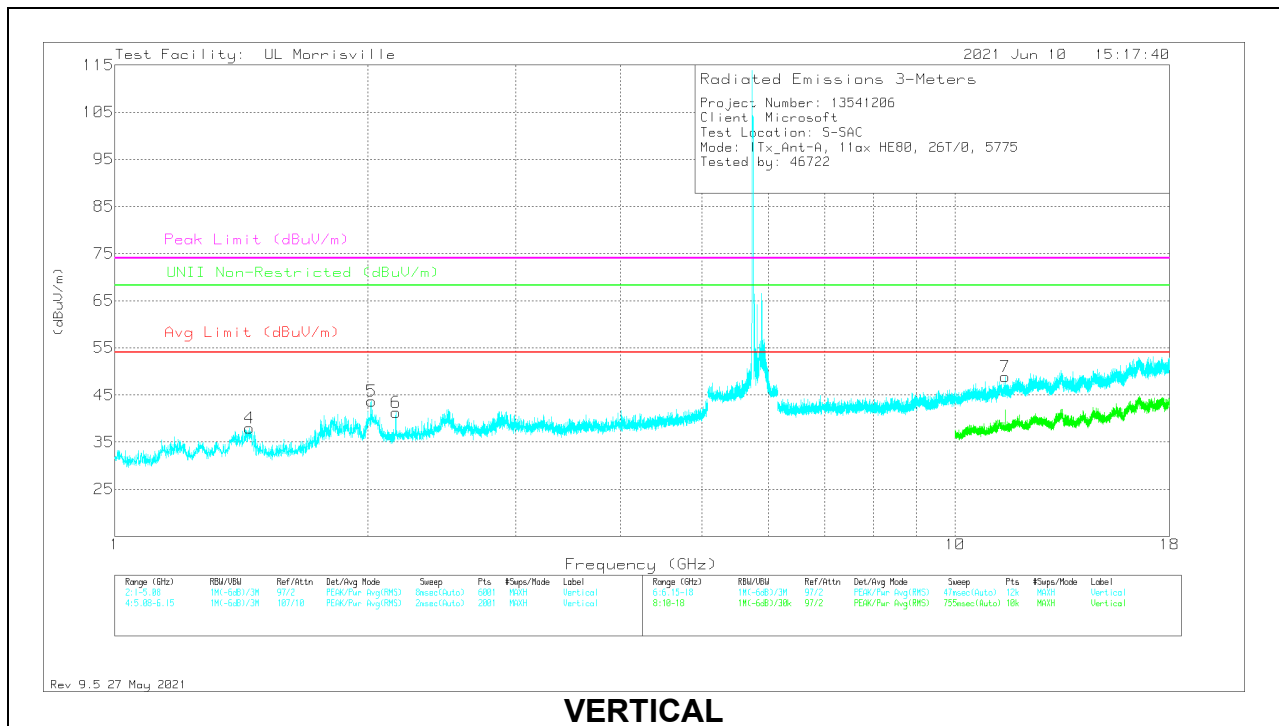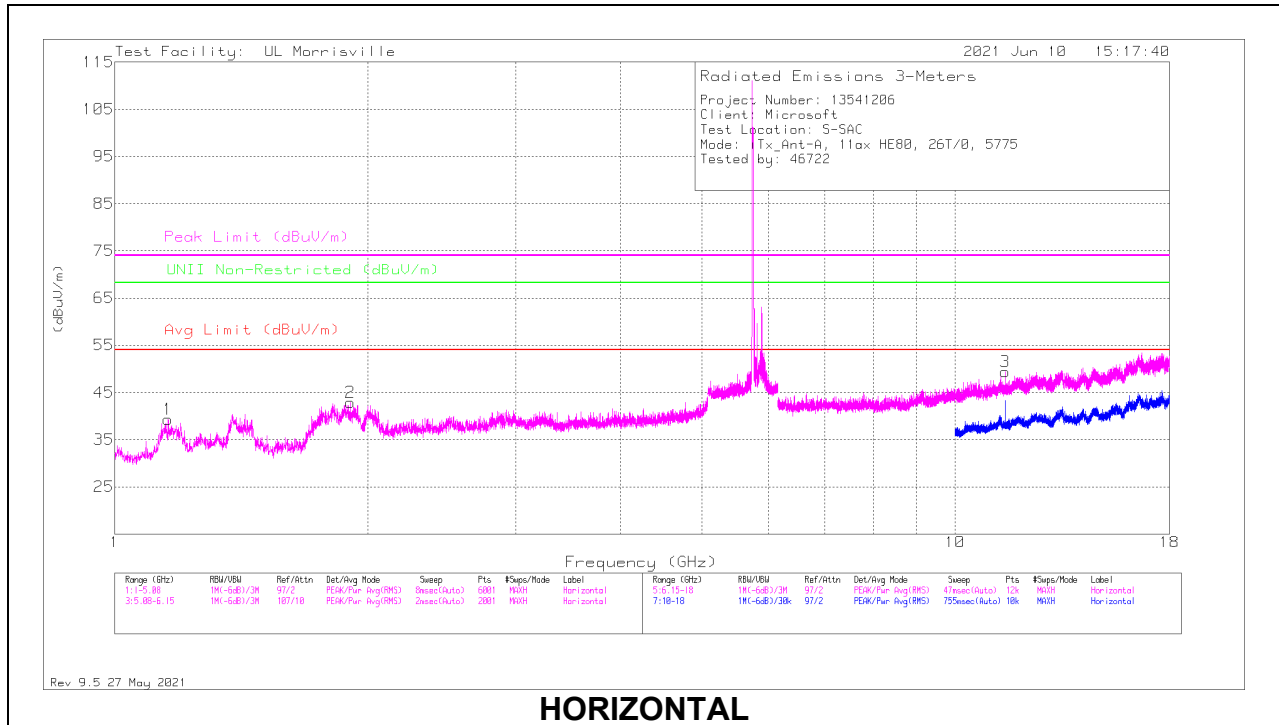

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 1.15776	46.74	Pk	27.8	-35.3	39.24	54	-14.76	74	-34.76	-	-	0-360	101	H
2	** 1.90576	46.26	Pk	30.9	-34.3	42.86	54	-11.14	74	-31.14	68.2	-25.34	0-360	101	H
4	* ** 1.44676	44.42	Pk	28.5	-35	37.92	54	-16.08	74	-36.08	-	-	0-360	200	V
5	** 2.02272	46.88	Pk	31.1	-34.3	43.68	54	-10.32	74	-30.32	68.2	-24.52	0-360	200	V
6	** 2.16008	43.44	Pk	32	-34.2	41.24	54	-12.76	74	-32.76	68.2	-26.96	0-360	200	V
3	* ** 11.47492	41.19	PK-U	38.1	-24.5	54.79	-	-	74	-19.21	-	-	101	162	H
	* ** 11.4742	30.3	ADV	38.1	-24.5	43.9	54	-10.1	-	-	-	-	101	162	H
7	* ** 11.47474	41.6	PK-U	38.1	-24.5	55.2	-	-	74	-18.8	-	-	69	228	V
	* ** 11.47426	30.03	ADV	38.1	-24.5	43.63	54	-10.37	-	-	-	-	69	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna A OFDMA MODE: 52-Tones, RU Index 37

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

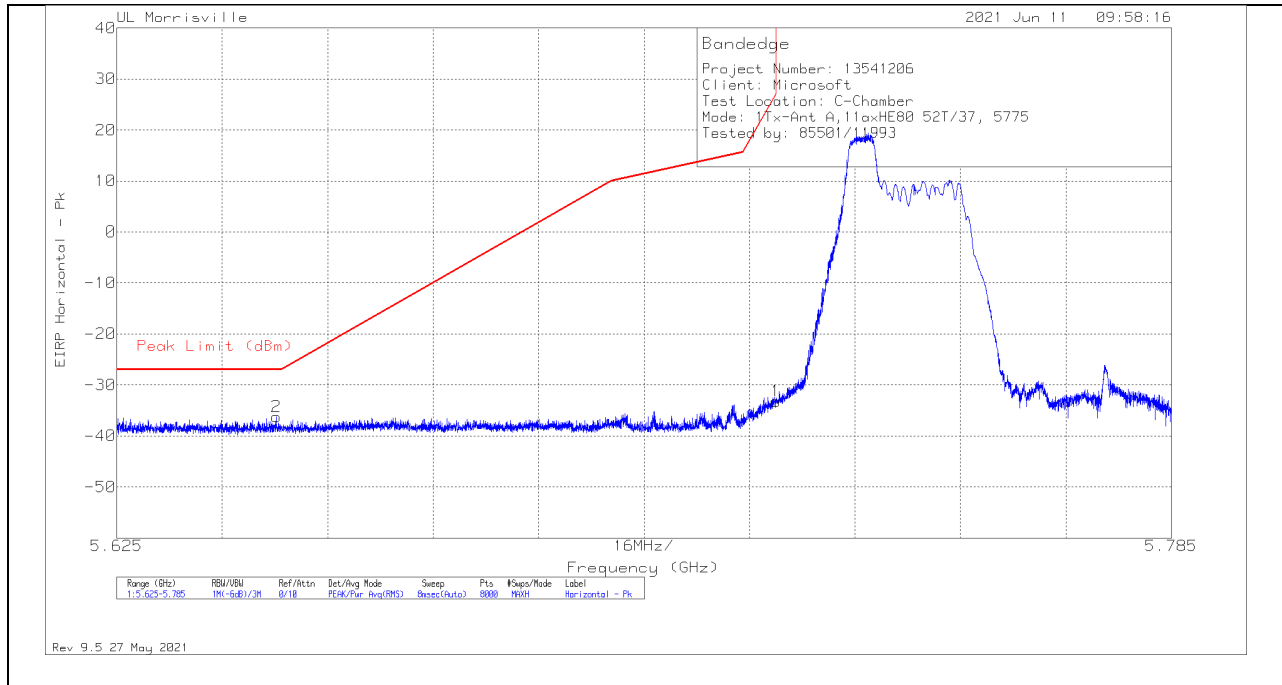

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64924	-72.96	Pk	34.4	-9.5	11.8	-36.26	-27	-9.26	206	110	H
1	5.725	-70.12	Pk	34.5	-9.4	11.8	-33.22	26.99	-60.21	206	110	H

Pk - Peak detector

VERTICAL RESULT


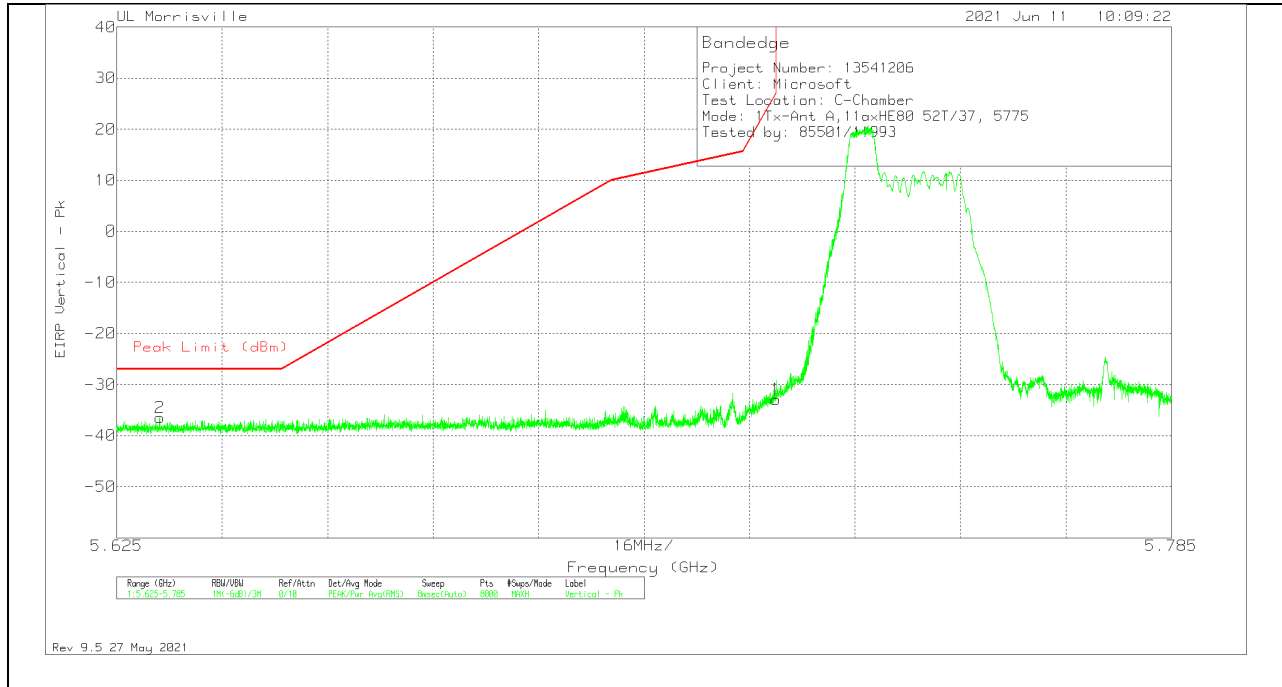


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63152	-73.28	Pk	34.4	-9.4	11.8	-36.48	-27	-9.48	208	103	V
1	5.725	-69.87	Pk	34.5	-9.4	11.8	-32.97	26.99	-59.96	208	103	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

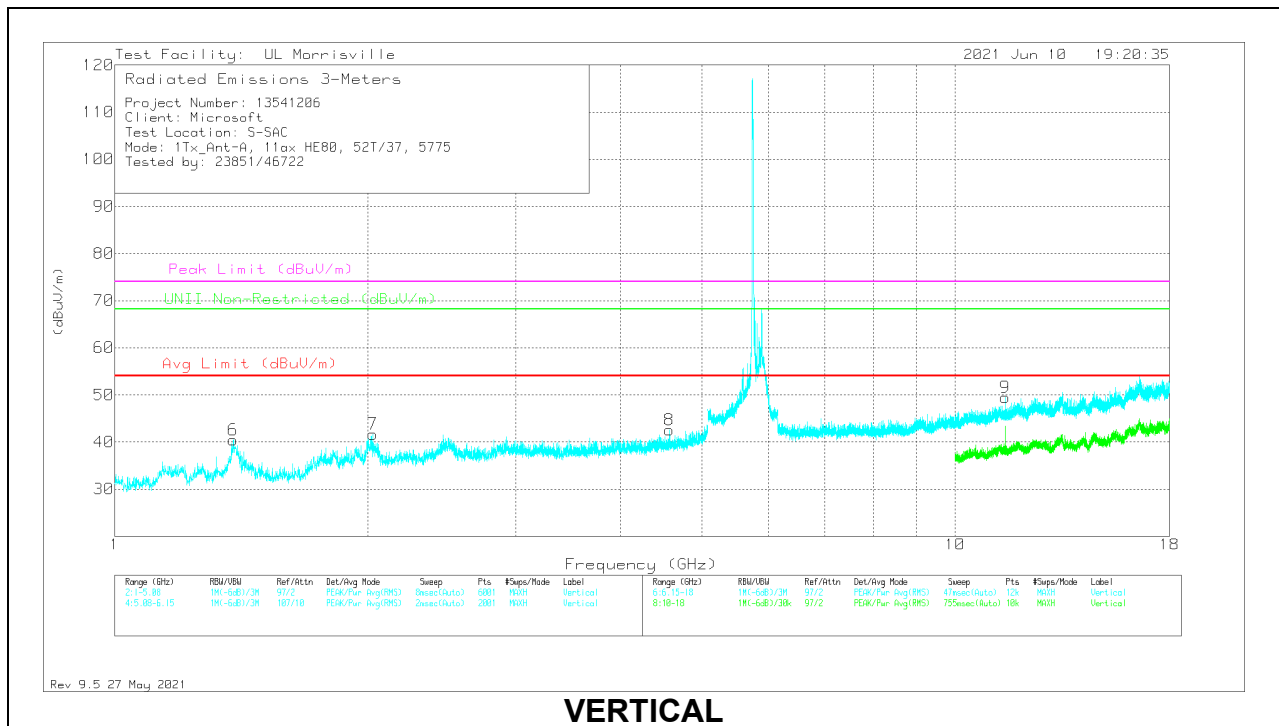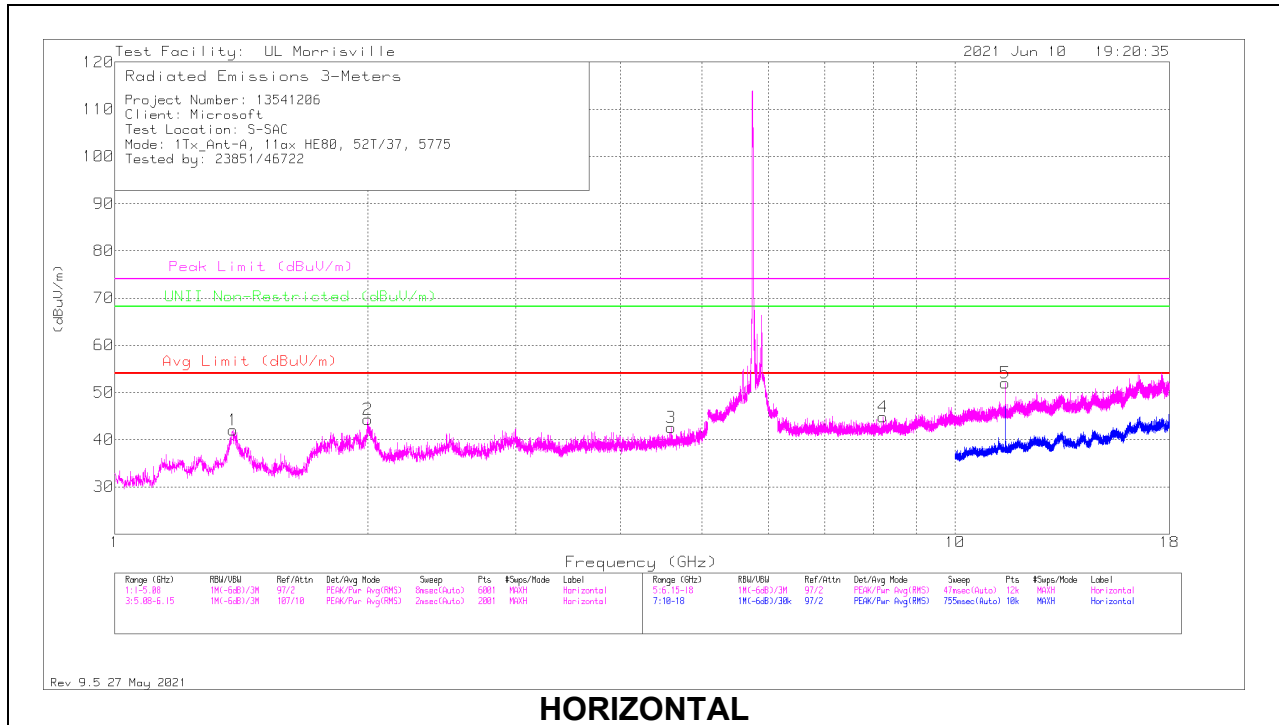

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.38216	47.78	Pk	29	-34.7	42.08	54	-11.92	74	-31.92	-	-	0-360	101	H
3	*** 4.59788	39.91	Pk	34.1	-31.4	42.61	54	-11.39	74	-31.39	-	-	0-360	200	H
6	*** 1.3842	46.19	Pk	29	-34.7	40.49	54	-13.51	74	-33.51	-	-	0-360	200	V
8	*** 4.57136	40.01	Pk	34	-31.5	42.51	54	-11.49	74	-31.49	-	-	0-360	101	V
4	*** 8.21684	36.72	Pk	35.8	-27.7	44.82	54	-9.18	74	-29.18	-	-	0-360	200	H
5	*** 11.47886	42.26	PK-U	38.1	-24.6	55.76	-	-	74	-18.24	-	-	190	188	H
	*** 11.47674	29.79	ADV	38.1	-24.6	43.29	54	-10.71	-	-	-	-	190	188	H
9	*** 11.47849	44.61	PK-U	38.1	-24.6	58.11	-	-	74	-15.89	-	-	169	110	V
	*** 11.47663	31.24	ADV	38.1	-24.6	44.74	54	-9.26	-	-	-	-	169	110	V
2	2.00028	47.03	Pk	31.5	-34.2	44.33	-	-	-	-	68.2	-23.87	0-360	200	H
7	2.02952	44.8	Pk	31.2	-34.3	41.7	-	-	-	-	68.2	-26.5	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

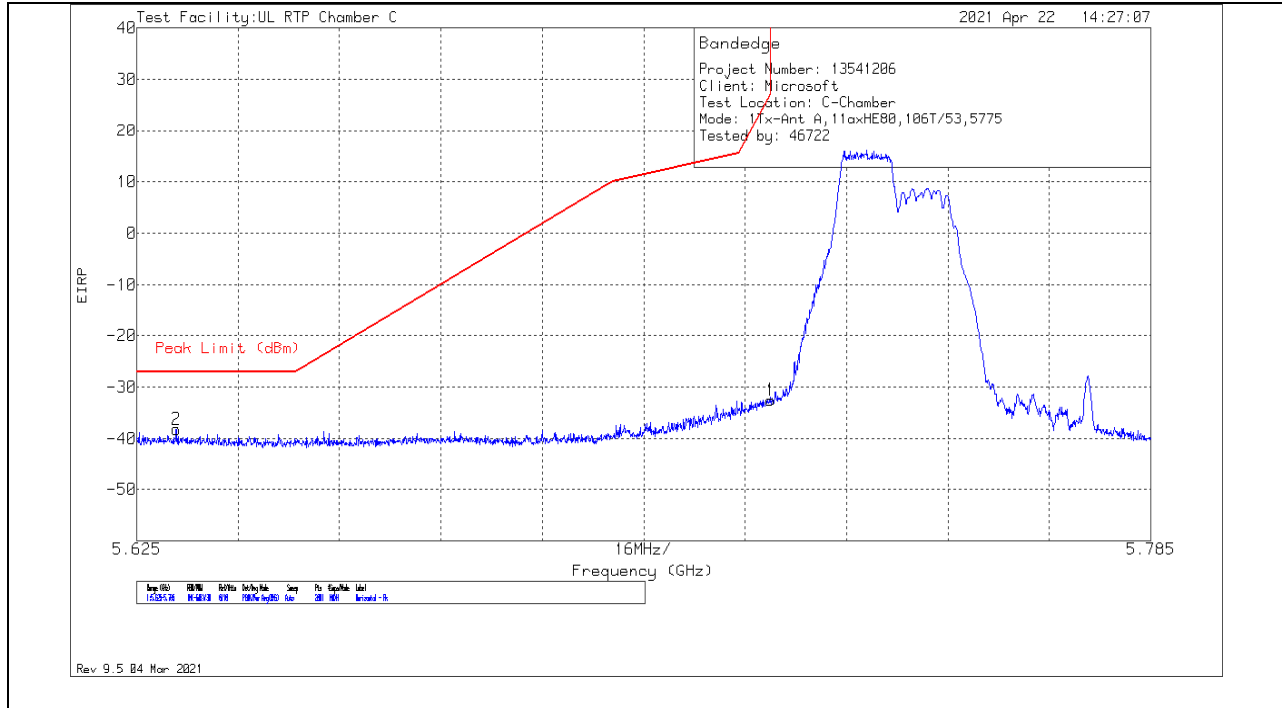

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63124	-72.42	Pk	34.8	-12.4	11.8	-38.22	-27	-11.22	192	246	H
1	5.725	-66.48	Pk	34.8	-12.7	11.8	-32.58	27	-59.58	192	246	H

Pk - Peak detector

VERTICAL RESULT

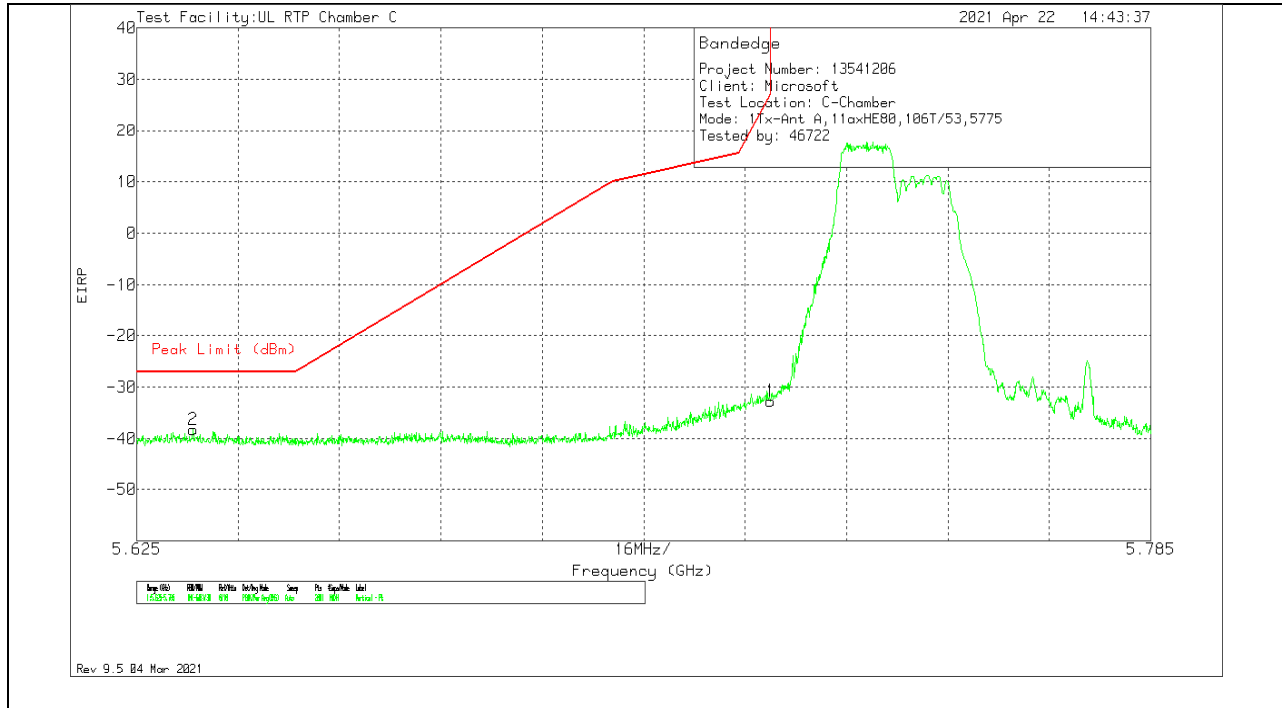


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63388	-72.47	Pk	34.8	-12.4	11.8	-38.27	-27	-11.27	193	252	V
1	5.725	-66.65	Pk	34.8	-12.7	11.8	-32.75	27	-59.75	193	252	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

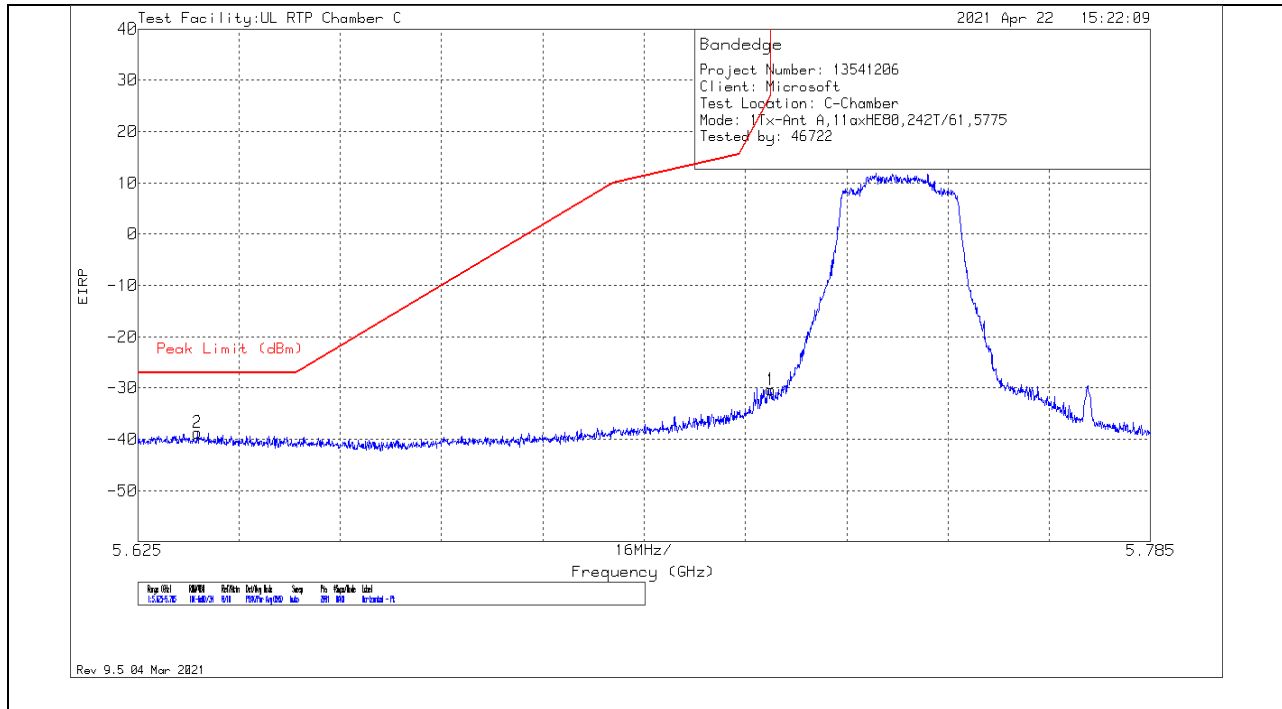

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63444	-72.8	Pk	34.8	-12.5	11.8	-38.7	-27	-11.7	218	216	H
1	5.725	-64.24	Pk	34.8	-12.7	11.8	-30.34	27	-57.34	218	216	H

Pk - Peak detector

VERTICAL RESULT

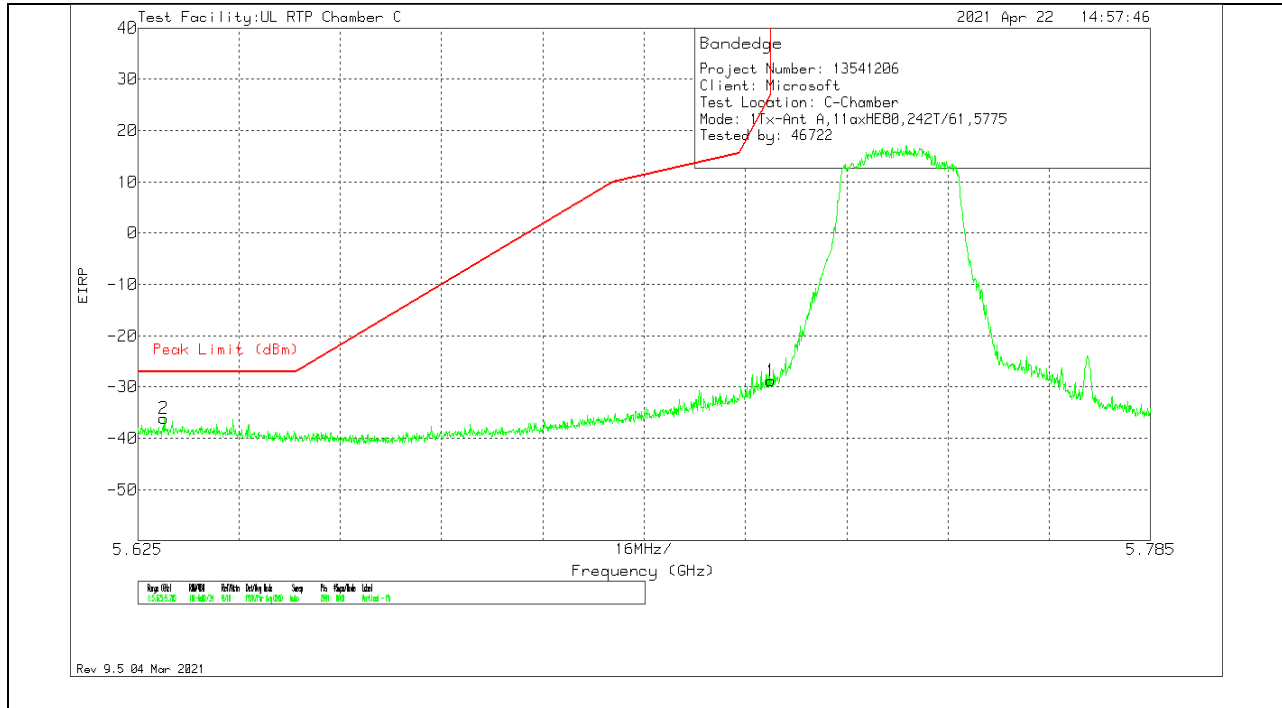


Pk - Peak detector

1TX Antenna A OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

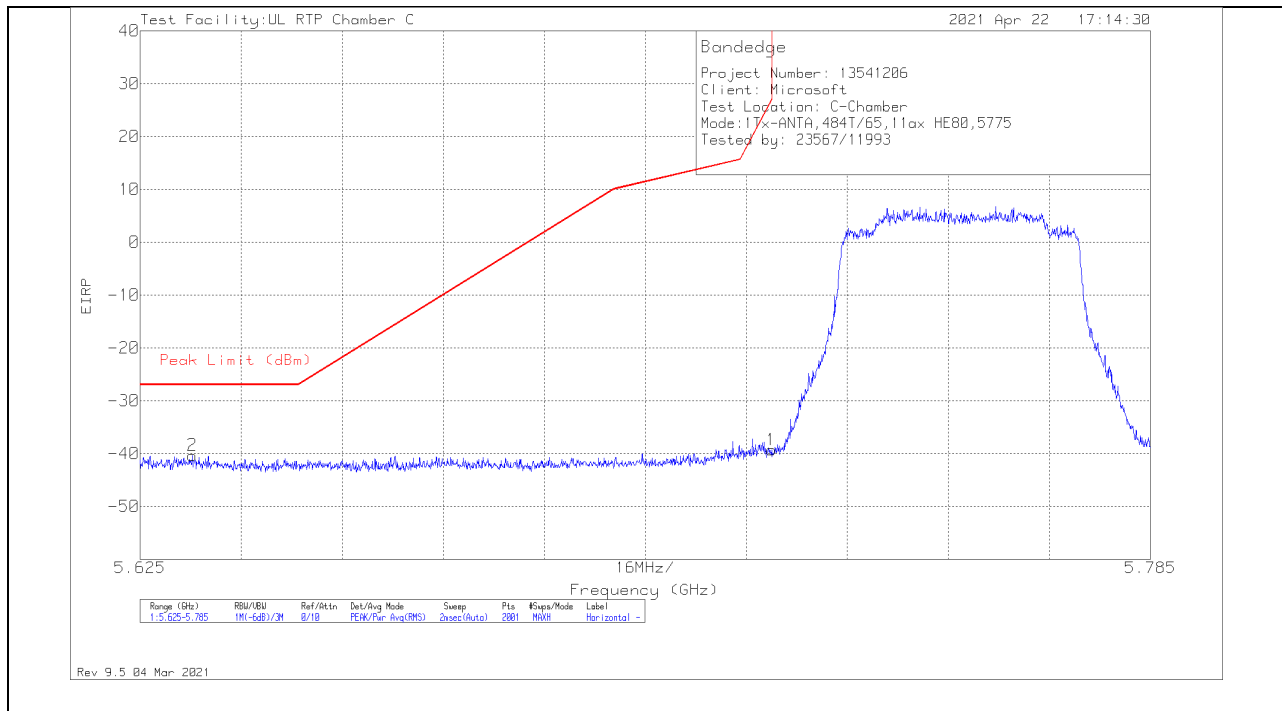

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63324	-74.55	Pk	34.8	-12.4	11.8	-40.35	-27	-13.35	190	141	H
1	5.725	-73.2	Pk	34.8	-12.7	11.8	-39.3	27	-66.3	190	141	H

Pk - Peak detector

VERTICAL RESULT

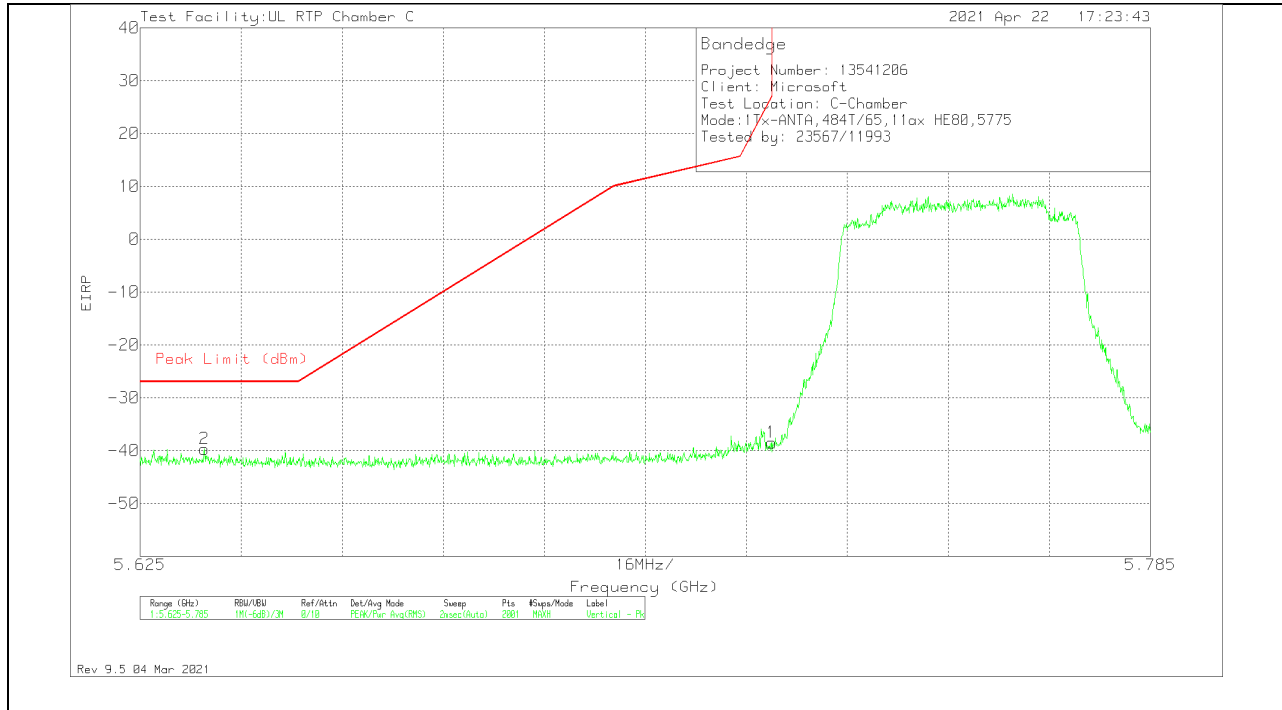


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63516	-73.8	Pk	34.8	-12.5	11.8	-39.7	-27	-12.7	206	263	V
1	5.725	-72.4	Pk	34.8	-12.7	11.8	-38.5	27	-65.5	206	263	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: SU, Single User

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

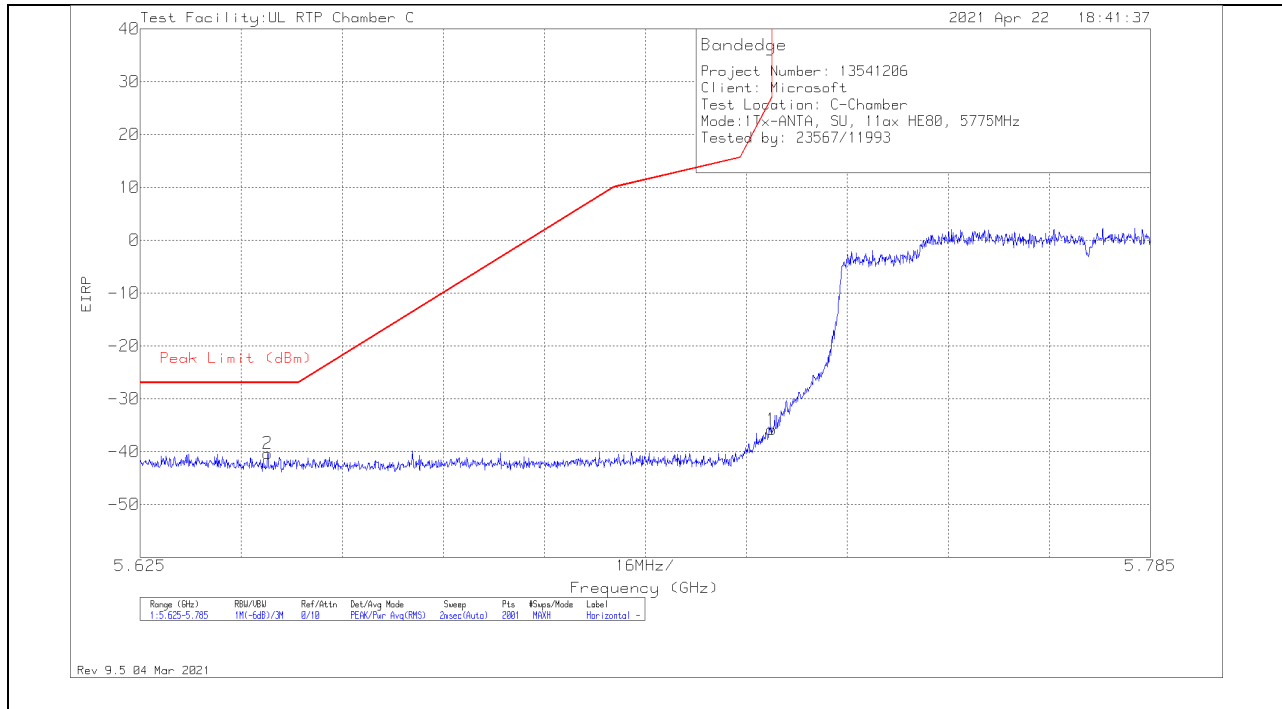

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64516	-73.96	Pk	34.8	-13	11.8	-40.36	-27	-13.36	201	286	H
1	5.725	-69.72	Pk	34.8	-12.7	11.8	-35.82	27	-62.82	201	286	H

Pk - Peak detector

VERTICAL RESULT

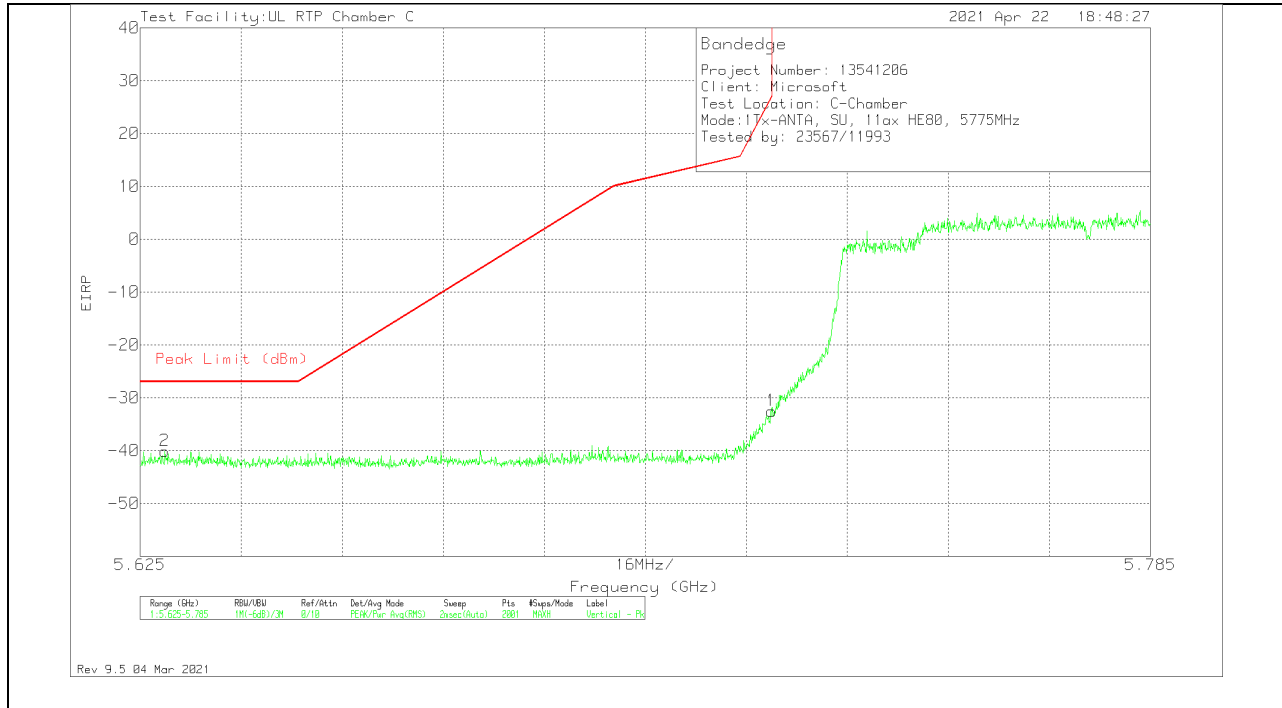


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62892	-74.28	Pk	34.8	-12.4	11.8	-40.08	-27	-13.08	204	167	V
1	5.725	-66.39	Pk	34.8	-12.7	11.8	-32.49	27	-59.49	204	167	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

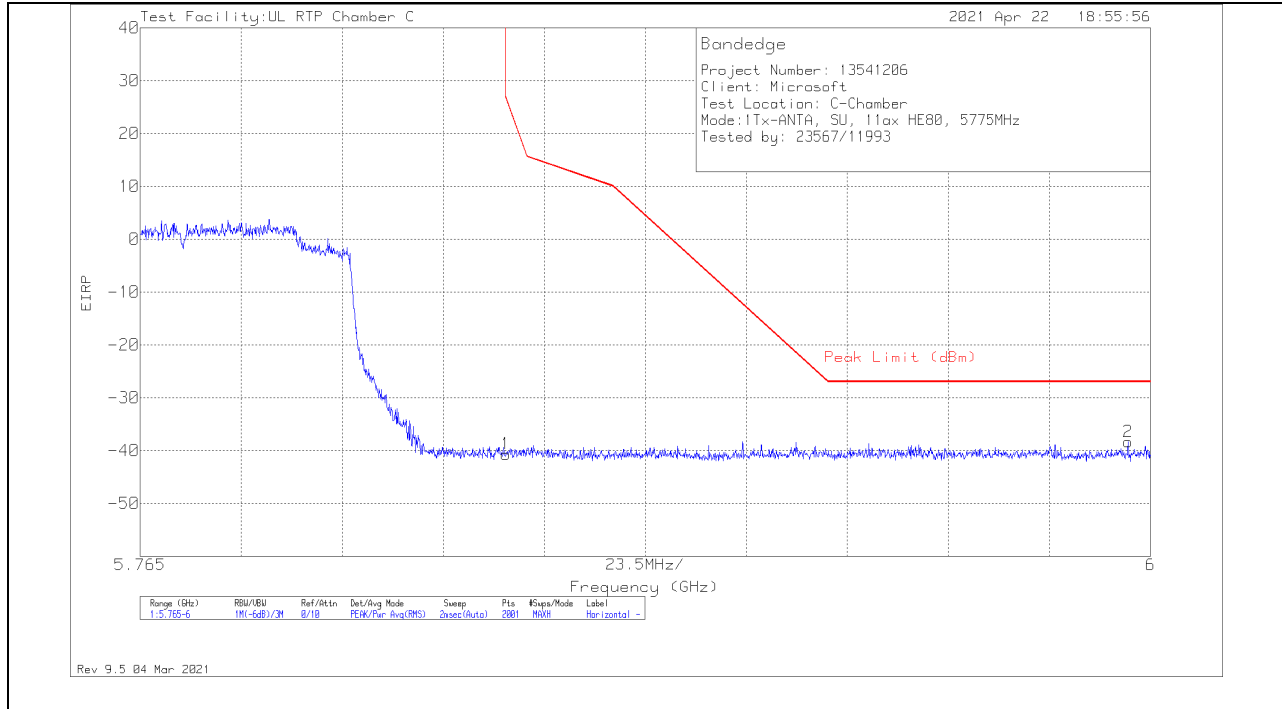

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-75.69	Pk	35.1	-11.9	11.8	-40.69	26.84	-67.53	178	101	H
2	5.99483	-73.86	Pk	35.4	-11.7	11.8	-38.36	-27	-11.36	178	101	H

Pk - Peak detector

VERTICAL RESULT

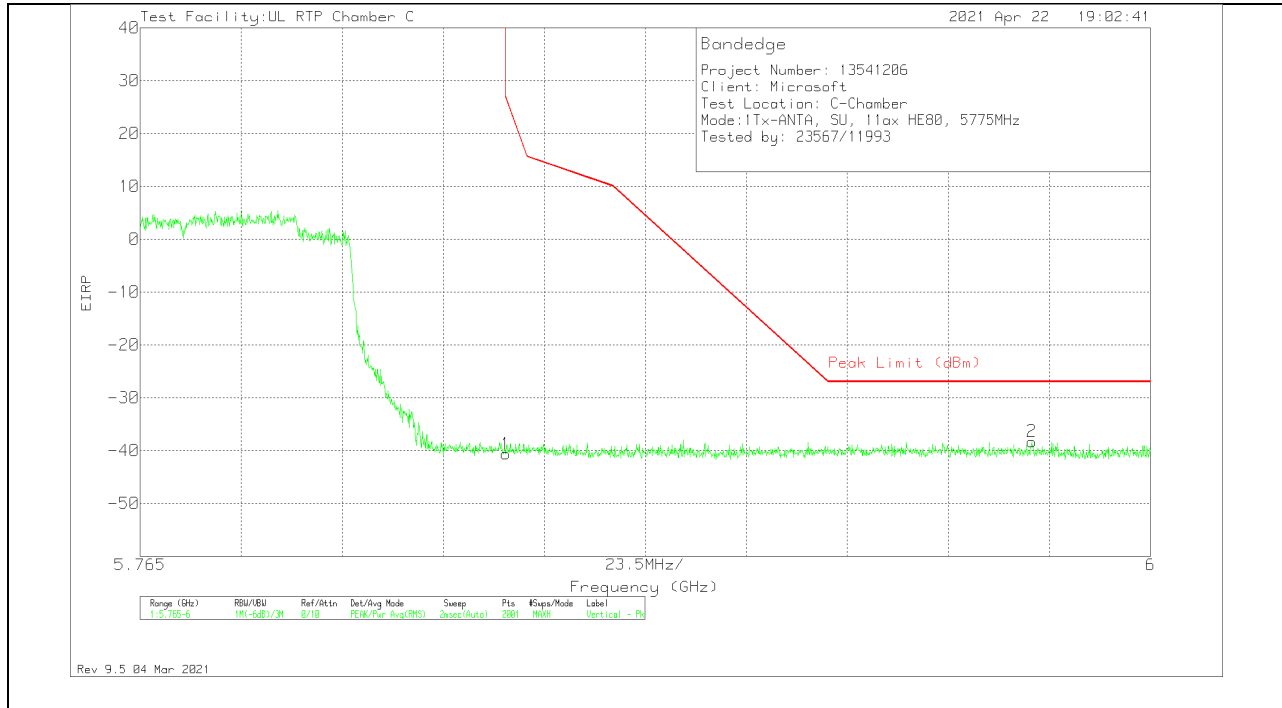


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-75.62	Pk	35.1	-11.9	11.8	-40.62	26.84	-67.46	206	102	V
2	5.97239	-73.79	Pk	35.4	-11.7	11.8	-38.29	-27	-11.29	206	102	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

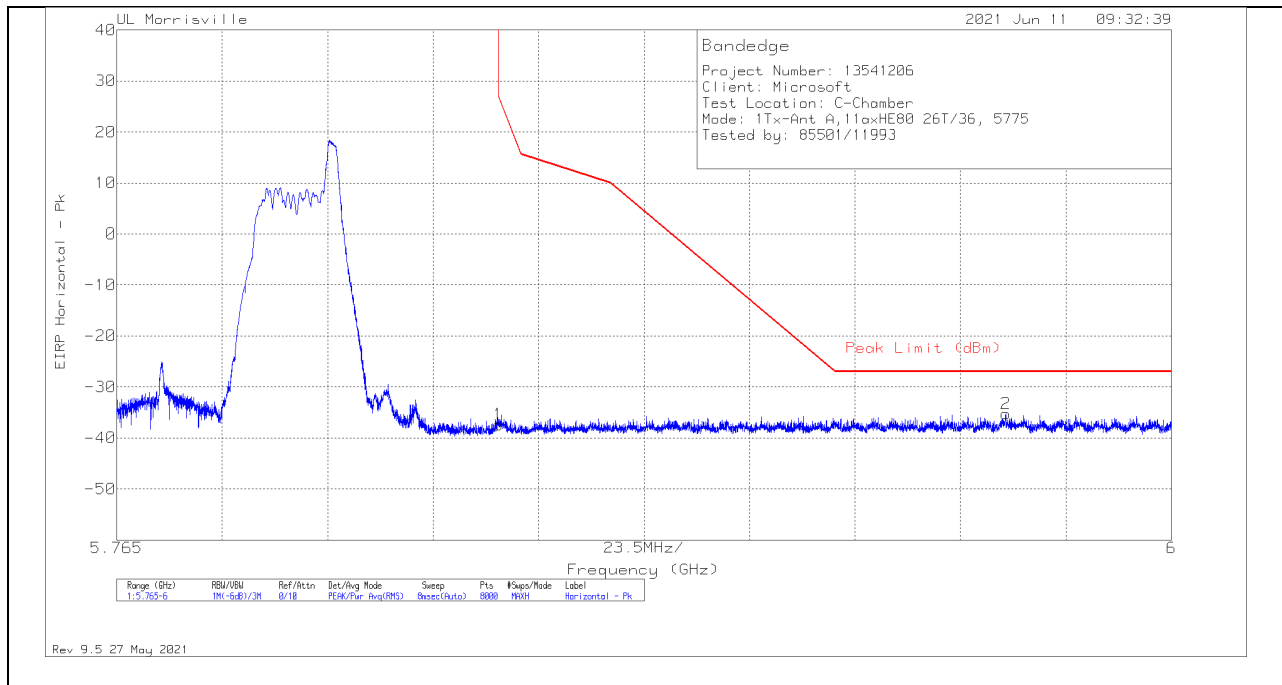

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-74.5	Pk	34.7	-9.4	11.8	-37.4	26.95	-64.35	196	100	H
2	5.9631	-72.83	Pk	35.1	-9.3	11.8	-35.23	-27	-8.23	196	100	H

Pk - Peak detector