


VERTICAL RESULT

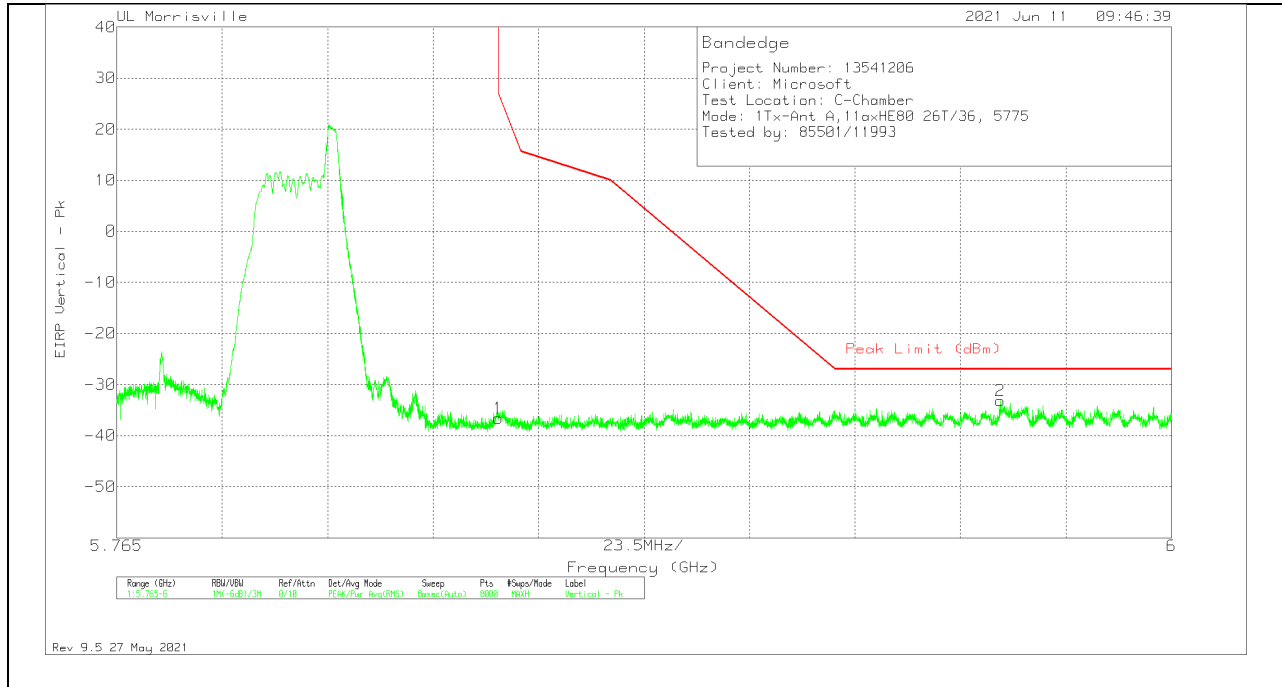


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-73.65	Pk	34.7	-9.4	11.8	-36.55	26.95	-63.5	212	117	V
2	5.96187	-70.79	Pk	35.1	-9.3	11.8	-33.19	-27	-6.19	212	117	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

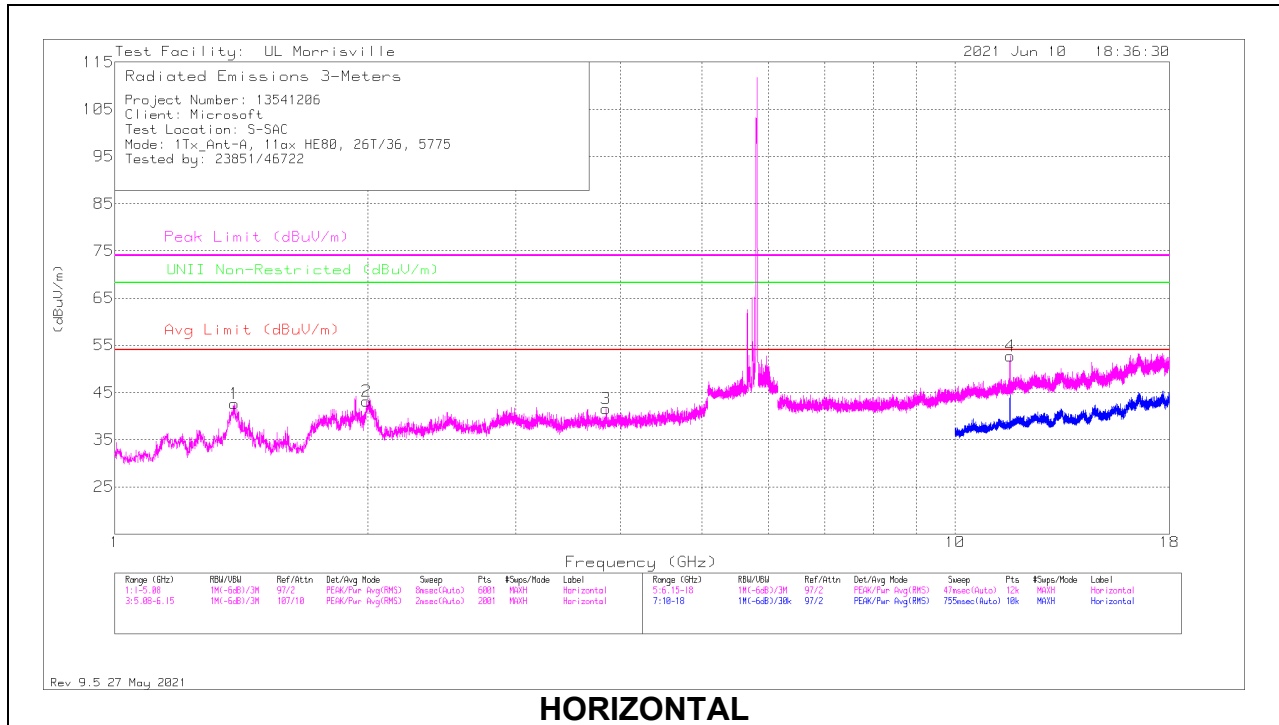

HORIZONTAL

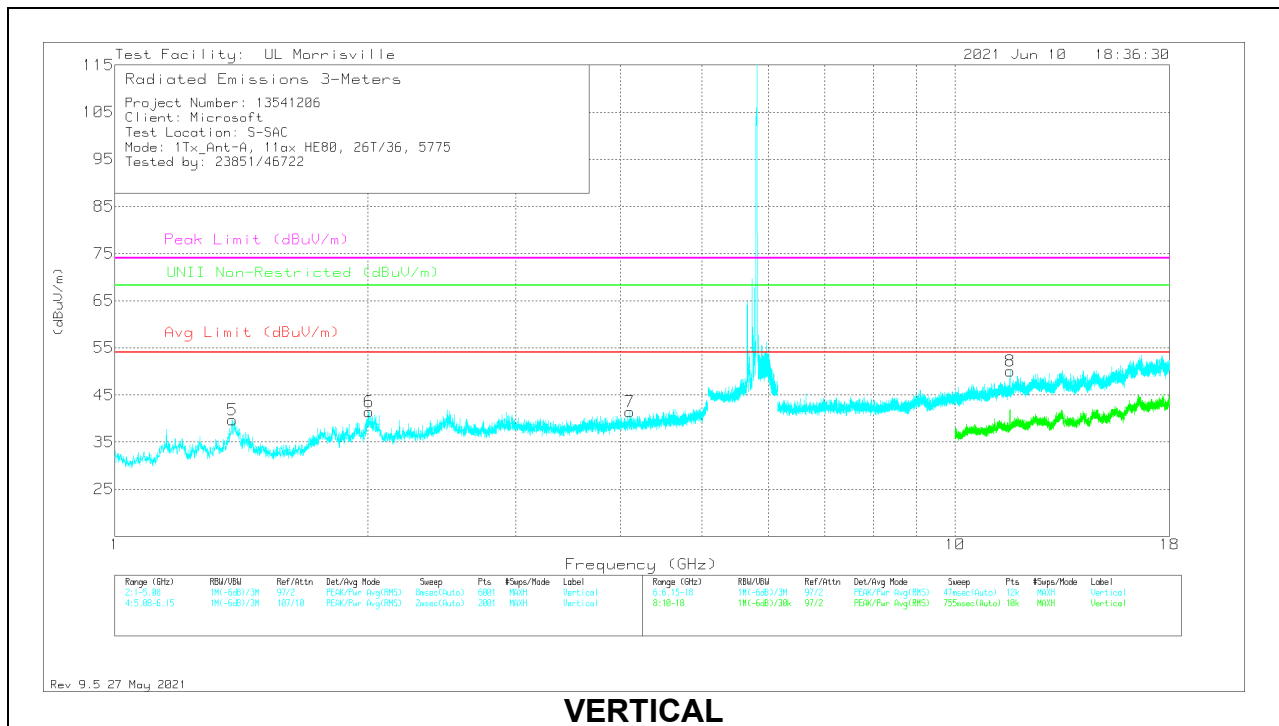

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.38896	48.3	Pk	29	-34.7	42.6	54	-11.4	74	-31.4	-	-	0-360	200	H
3	*** 3.8458	40.81	Pk	33.4	-32.6	41.61	54	-12.39	74	-32.39	-	-	0-360	101	H
5	*** 1.38012	45.42	Pk	29	-34.7	39.72	54	-14.28	74	-34.28	-	-	0-360	200	V
7	*** 4.10488	39.46	Pk	33.6	-31.7	41.36	54	-12.64	74	-32.64	-	-	0-360	200	V
4	*** 11.62482	42.05	PK-U	38.2	-24.9	55.35	-	-	74	-18.65	-	-	179	105	H
	*** 11.62599	31.34	ADV	38.2	-24.9	44.64	54	-9.36	-	-	-	-	179	105	H
8	*** 11.62493	40.94	PK-U	38.2	-24.9	54.24	-	-	74	-19.76	-	-	168	178	V
	*** 11.62601	29.62	ADV	38.2	-24.9	42.92	54	-11.08	-	-	-	-	168	178	V
2	1.99348	45.93	Pk	31.4	-34.2	43.13	-	-	-	-	68.2	-25.07	0-360	200	H
6	2.00708	44.83	Pk	30.9	-34.3	41.43	-	-	-	-	68.2	-26.77	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average


1TX Antenna A OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID

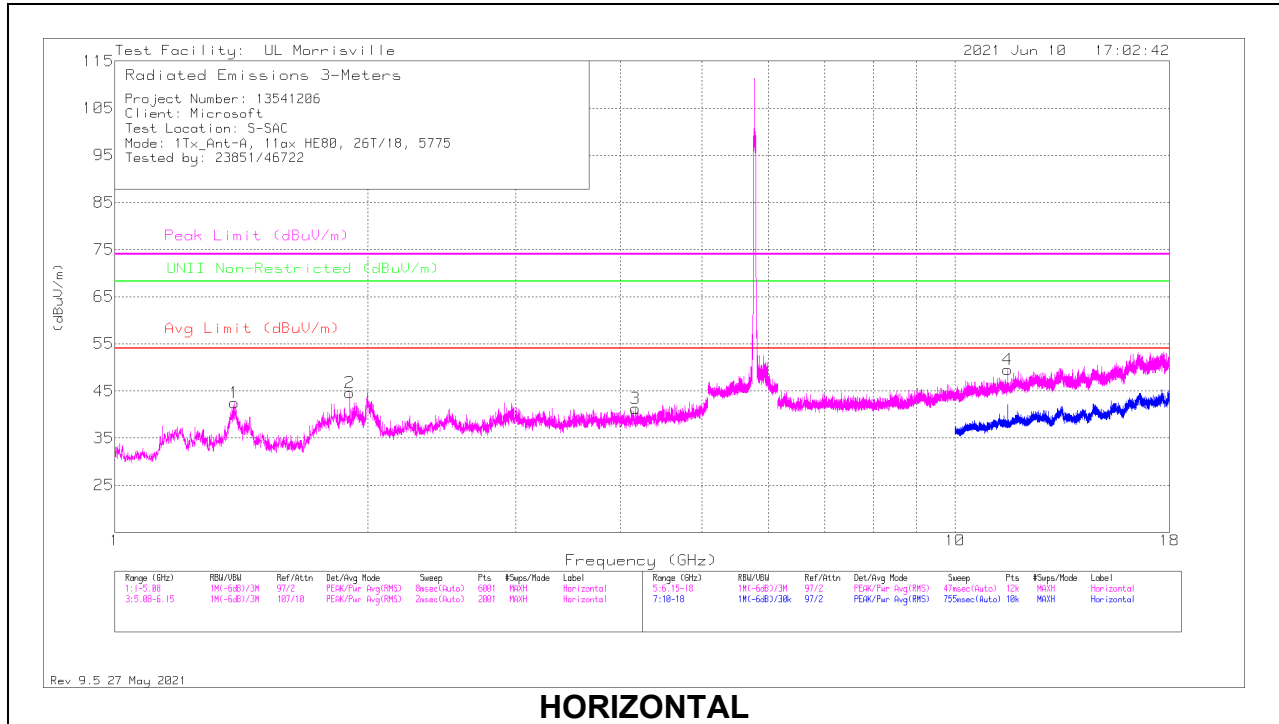

HORIZONTAL

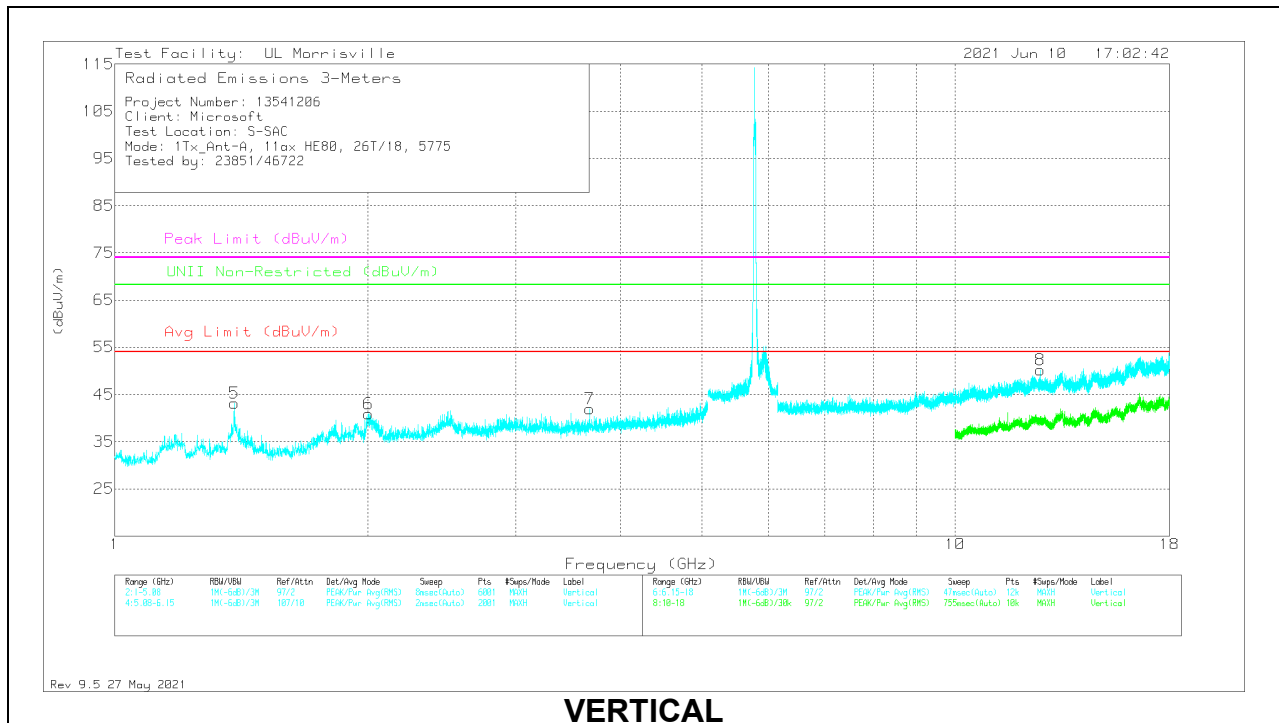

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.3876	48.19	Pk	29	-34.7	42.49	54	-11.51	74	-31.51	-	-	0-360	101	H
2	** 1.90508	47.97	Pk	30.9	-34.3	44.57	54	-9.43	74	-29.43	68.2	-23.63	0-360	200	H
3	*** 4.16336	39.05	Pk	33.6	-31.4	41.25	54	-12.75	74	-32.75	-	-	0-360	101	H
5	*** 1.38896	48.82	Pk	29	-34.7	43.12	54	-10.88	74	-30.88	-	-	0-360	200	V
7	*** 3.67512	41.01	Pk	33.2	-32.3	41.91	54	-12.09	74	-32.09	-	-	0-360	101	V
4	*** 11.54851	38.83	PK-U	38.2	-24.9	52.13	-	-	74	-21.87	-	-	158	185	H
	*** 11.5499	27.95	ADV	38.2	-24.9	41.25	54	-12.75	-	-	-	-	158	185	H
8	*** 12.6302	35.83	PK-U	39.1	-24.9	50.03	-	-	74	-23.97	-	-	27	343	V
	*** 12.63064	23.13	ADV	39.1	-24.9	37.33	54	-16.67	-	-	-	-	27	343	V
6	2.00572	44.22	Pk	31	-34.3	40.92	-	-	-	-	68.2	-27.28	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average


1TX Antenna A OFDMA MODE: 52-Tones, RU Index 44

HARMONICS AND SPURIOUS EMISSIONS

MID

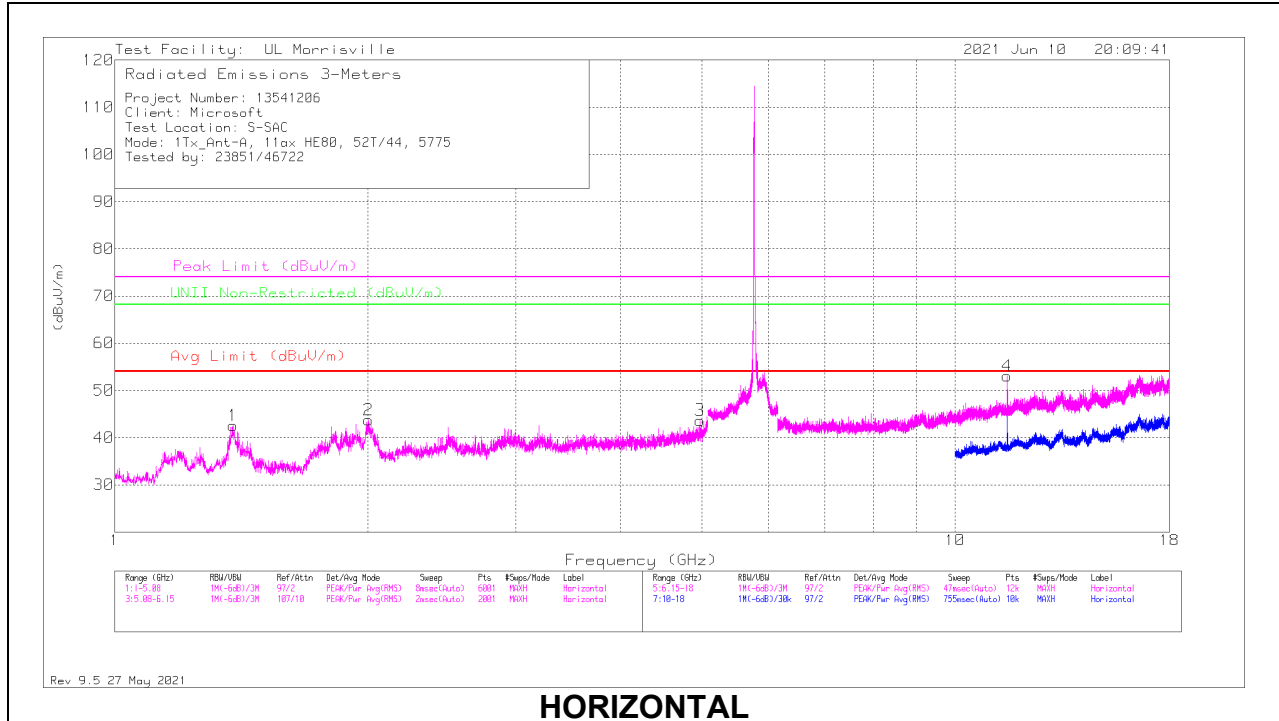

HORIZONTAL

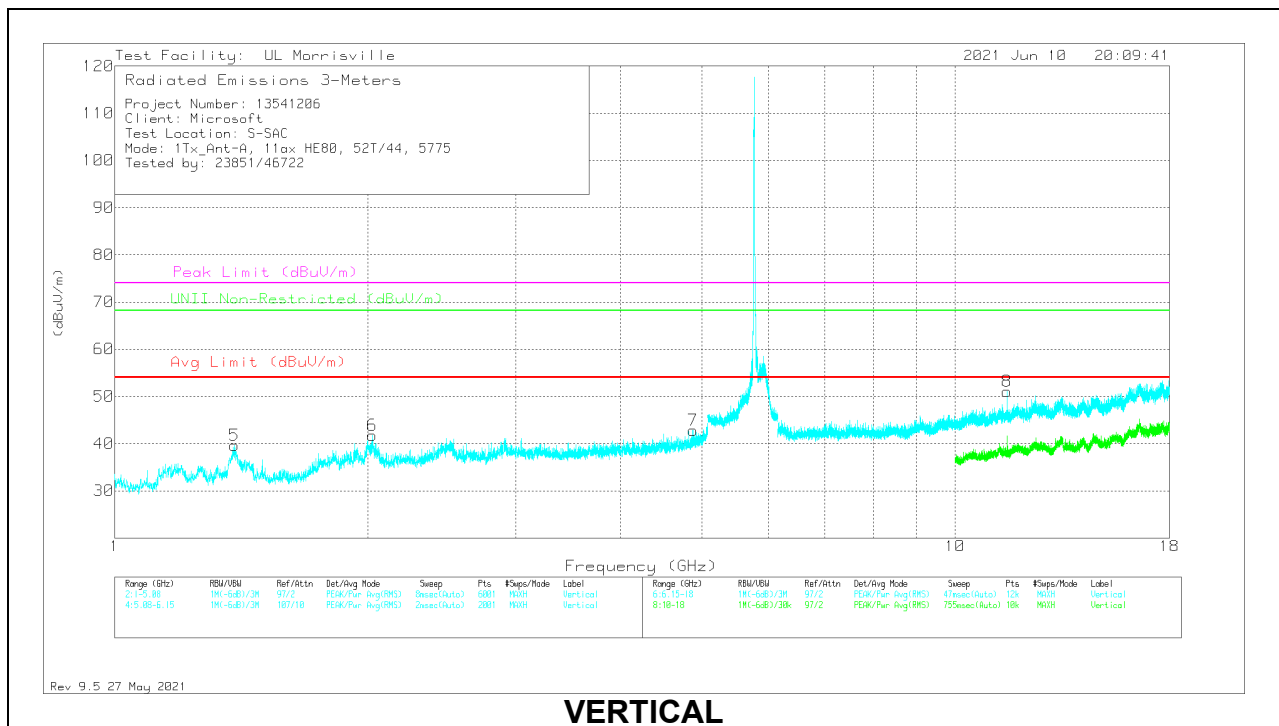

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 1.38216	48.29	Pk	29	-34.7	42.59	54	-11.41	74	-31.41	-	-	0-360	101	H
3	* ** 4.9712	39.09	Pk	34.1	-29.5	43.69	54	-10.31	74	-30.31	-	-	0-360	200	H
5	* ** 1.3876	45.4	Pk	29	-34.7	39.7	54	-14.3	74	-34.3	-	-	0-360	200	V
7	* ** 4.876	39.16	Pk	34.2	-30.5	42.86	54	-11.14	74	-31.14	-	-	0-360	101	V
4	* ** 11.54224	41.99	PK-U	38.2	-24.8	55.39	-	-	74	-18.61	-	-	191	201	H
	* ** 11.54364	30.13	ADV	38.2	-24.8	43.53	54	-10.47	-	-	-	-	191	201	H
8	* ** 11.54297	39.46	PK-U	38.2	-24.8	52.86	-	-	74	-21.14	-	-	256	201	V
	* ** 11.54306	27.48	ADV	38.2	-24.8	40.88	54	-13.12	-	-	-	-	256	201	V
2	2.00368	46.82	Pk	31.2	-34.2	43.82	-	-	-	-	68.2	-24.38	0-360	200	H
6	2.0268	44.93	Pk	31.1	-34.3	41.73	-	-	-	-	68.2	-26.47	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna A OFDMA MODE: 52-Tones, RU Index 52

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

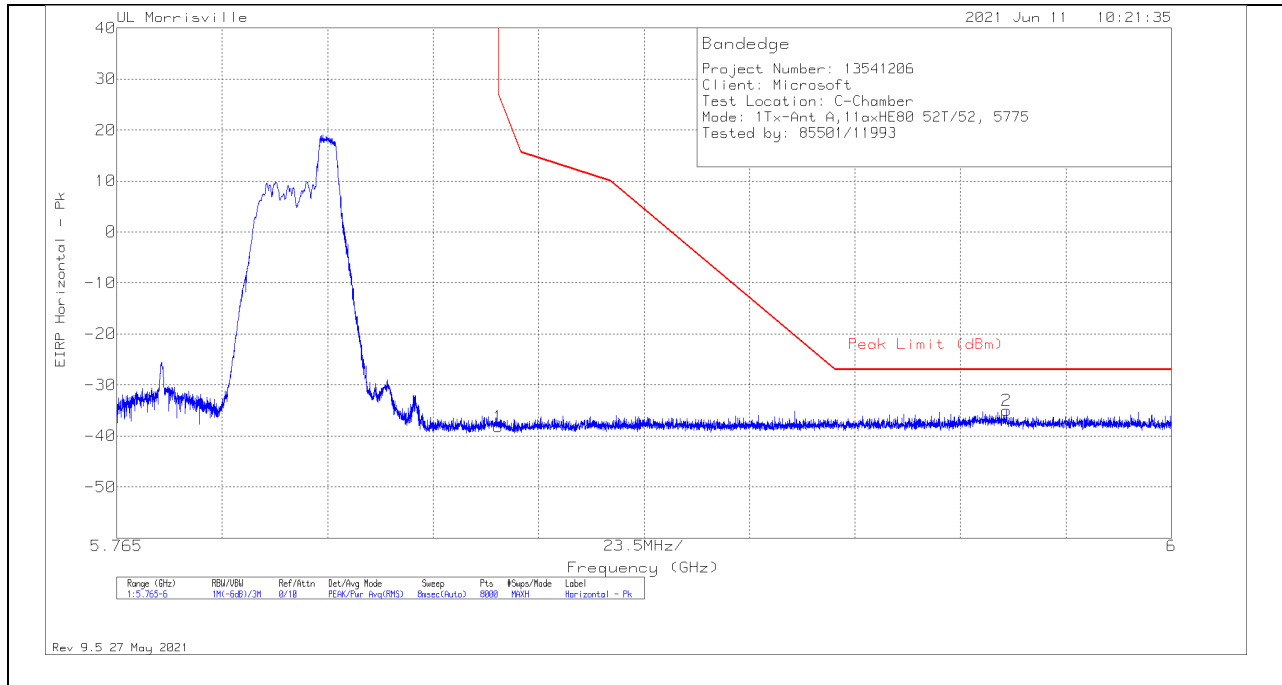

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-75.25	Pk	34.7	-9.4	11.8	-38.15	26.95	-65.1	203	100	H
2	5.96322	-72.61	Pk	35.1	-9.3	11.8	-35.01	-27	-8.01	203	100	H

Pk - Peak detector

VERTICAL RESULT

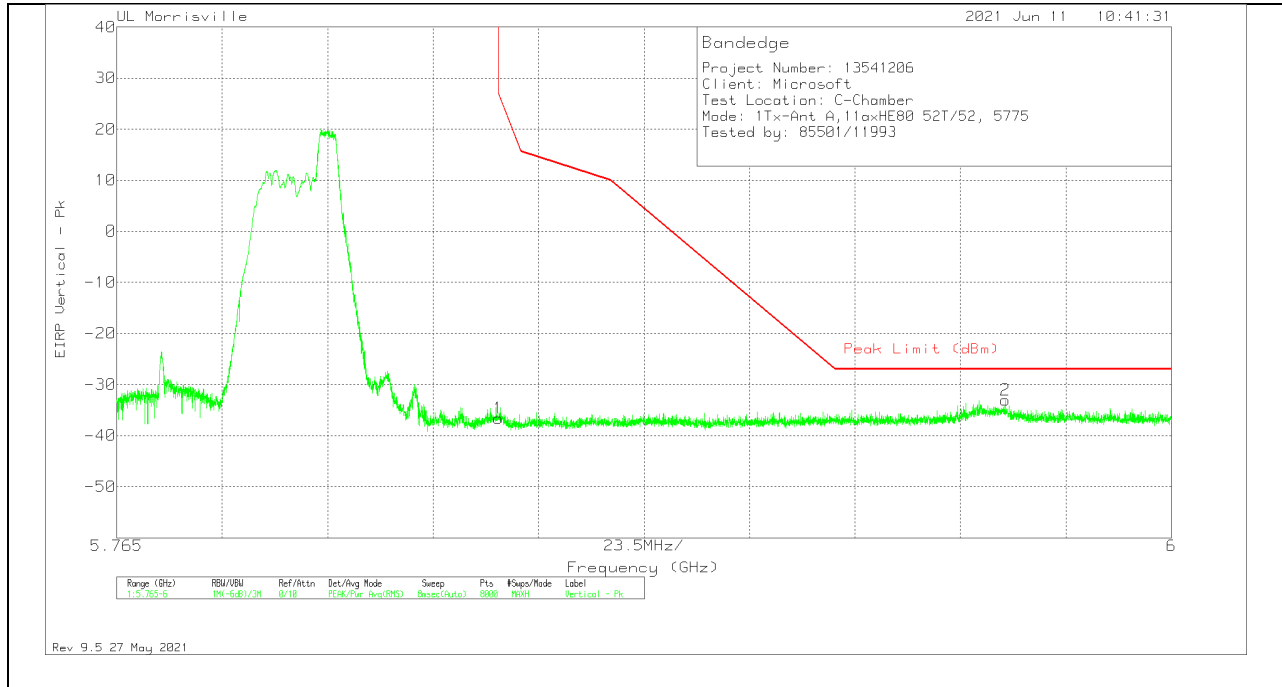


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-73.75	Pk	34.7	-9.4	11.8	-36.65	26.95	-63.6	202	195	V
2	5.96296	-70.62	Pk	35.1	-9.3	11.8	-33.02	-27	-6.02	202	195	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

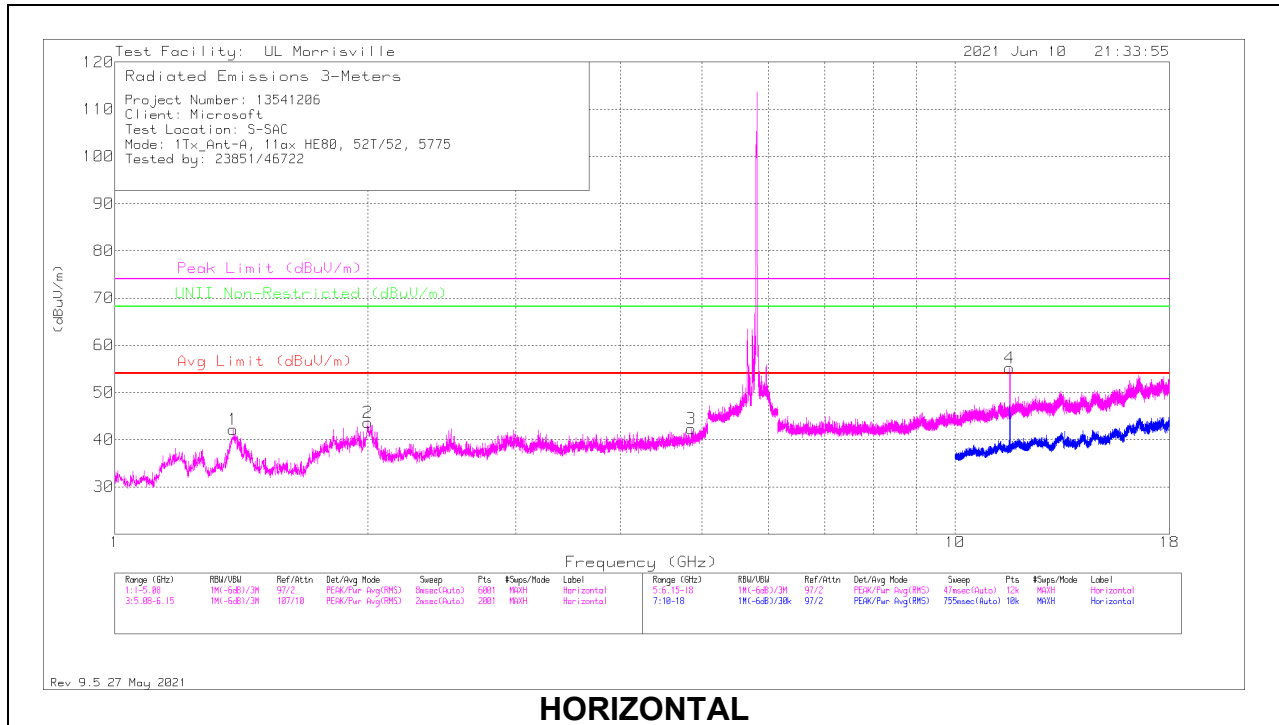

HORIZONTAL

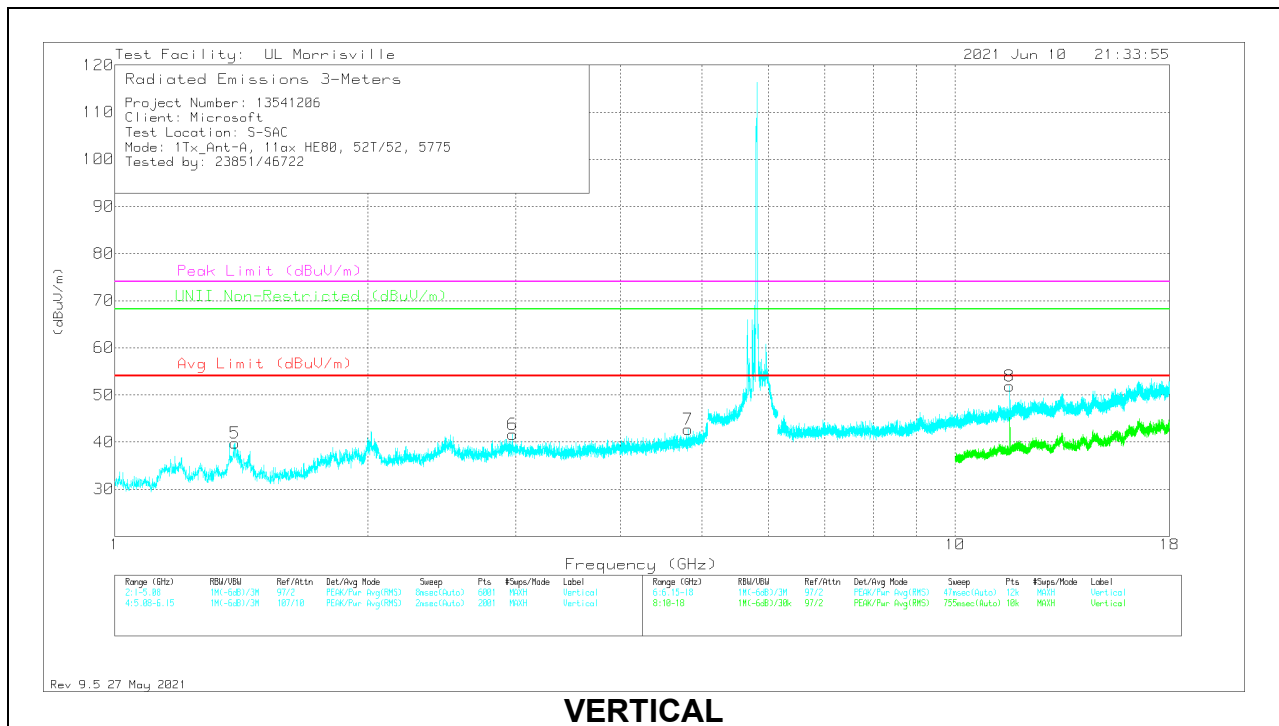

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.38284	47.92	Pk	29	-34.7	42.22	54	-11.78	74	-31.78	-	-	0-360	101	H
3	*** 4.85424	38.78	Pk	34.2	-30.7	42.28	54	-11.72	74	-31.72	-	-	0-360	199	H
5	*** 1.39032	45.46	Pk	29	-34.7	39.76	54	-14.24	74	-34.24	-	-	0-360	200	V
7	*** 4.81548	39.43	Pk	34.1	-30.8	42.73	54	-11.27	74	-31.27	-	-	0-360	101	V
4	*** 11.62323	45.35	PK-U	38.2	-24.9	58.65	-	-	74	-15.35	-	-	183	190	H
	*** 11.62377	33.32	ADV	38.2	-24.9	46.62	54	-7.38	-	-	-	-	183	190	H
8	*** 11.62295	43.76	PK-U	38.2	-24.9	57.06	-	-	74	-16.94	-	-	171	121	V
	*** 11.62395	31.42	ADV	38.2	-24.9	44.72	54	-9.28	-	-	-	-	171	121	V
2	2.00096	46.38	Pk	31.4	-34.2	43.58	-	-	-	-	68.2	-24.62	0-360	199	H
6	2.97404	41.99	Pk	33.2	-33.6	41.59	-	-	-	-	68.2	-26.61	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 60

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

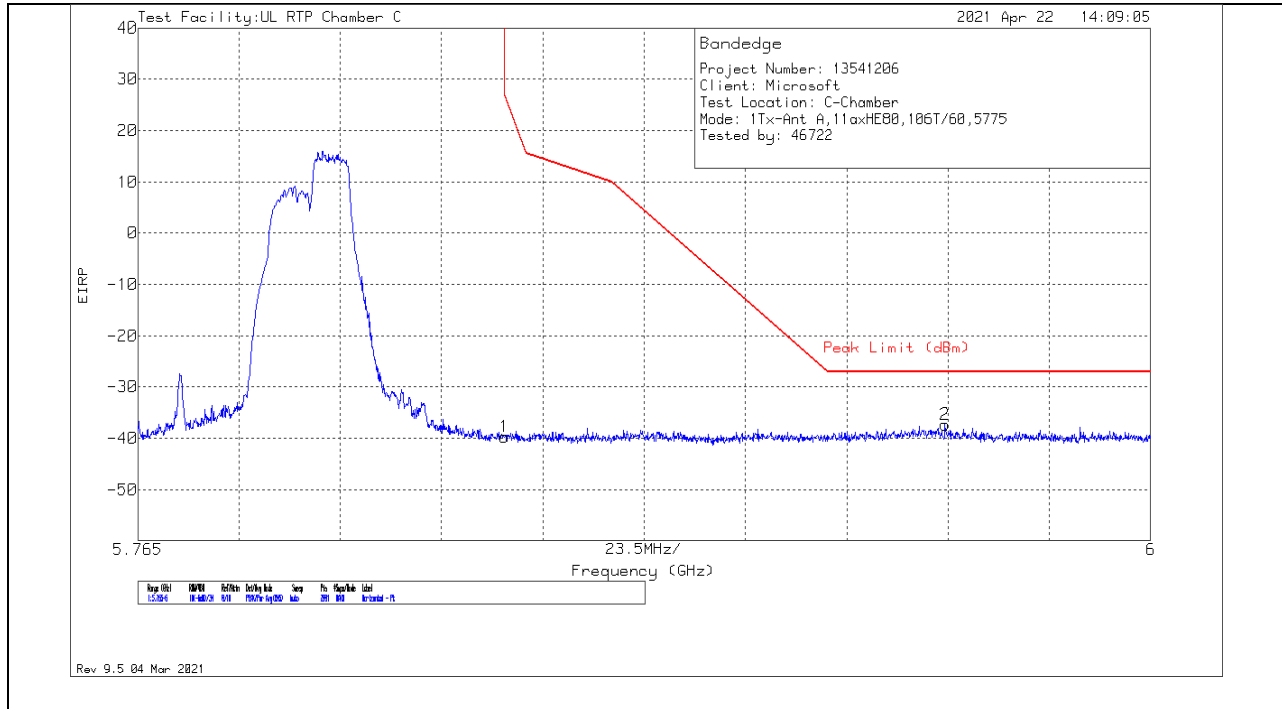

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-74.72	Pk	35.1	-11.9	11.8	-39.72	26.84	-66.56	185	263	H
2	5.9523	-72.46	Pk	35.4	-12.1	11.8	-37.36	-27	-10.36	185	263	H

Pk - Peak detector

VERTICAL RESULT

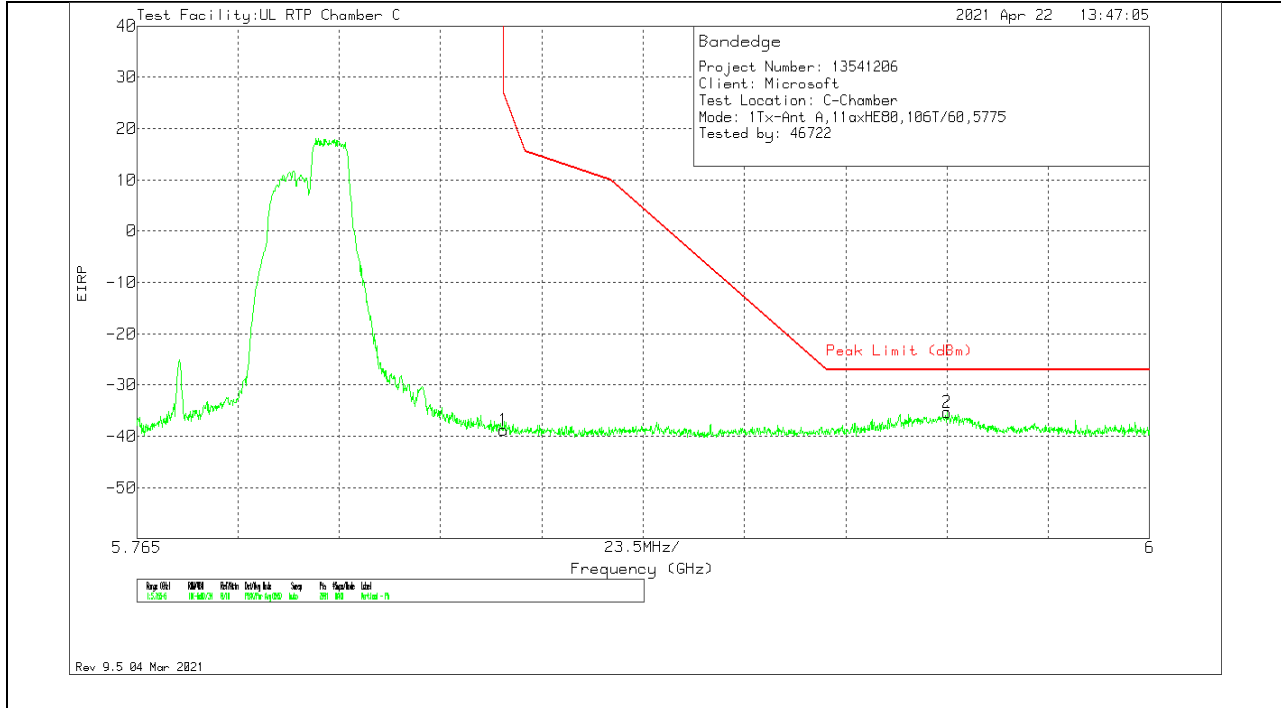


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-73.78	Pk	35.1	-11.9	11.8	-38.78	26.84	-65.62	181	215	V
2	5.953	-70.4	Pk	35.4	-12.1	11.8	-35.3	-27	-8.3	181	215	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 64

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

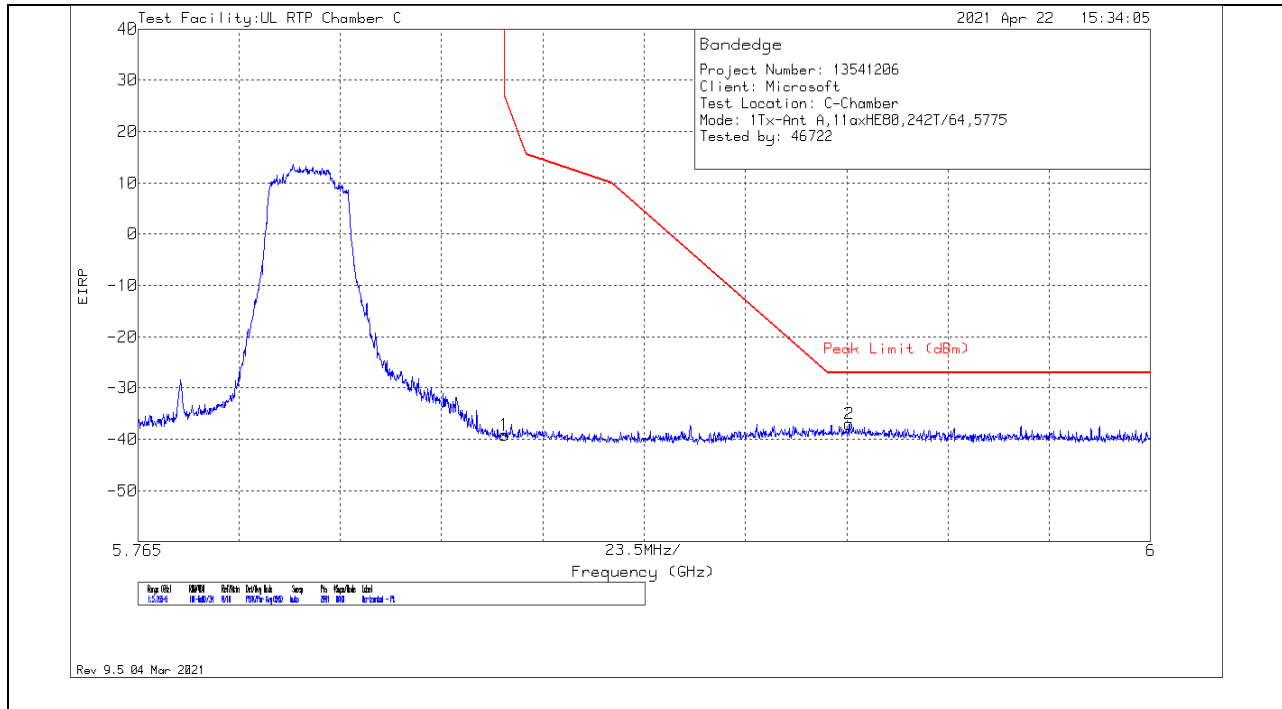

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-74.17	Pk	35.1	-11.9	11.8	-39.17	26.84	-66.01	193	244	H
2	5.93009	-72.23	Pk	35.3	-11.9	11.8	-37.03	-27	-10.03	193	244	H

Pk - Peak detector

VERTICAL RESULT

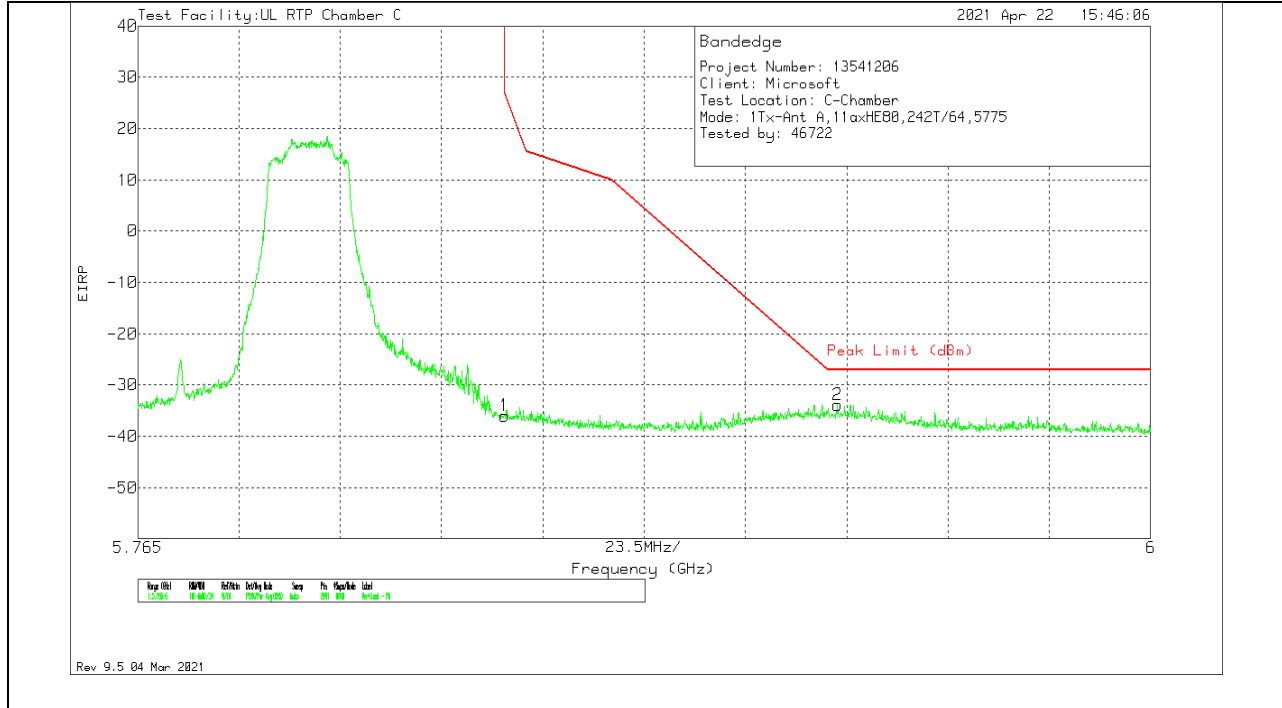

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-71	Pk	35.1	-11.9	11.8	-36	26.84	-62.84	188	115	V
2	5.92739	-69.05	Pk	35.3	-11.9	11.8	-33.85	-27	-6.85	188	115	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: 484-Tones, RU Index 66

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-76.46	Pk	35.1	-11.9	11.8	-41.46	26.84	-68.3	193	253	H
2	5.93702	-72.74	Pk	35.3	-11.9	11.8	-37.54	-27	-10.54	193	253	H

Pk - Peak detector

VERTICAL RESULT

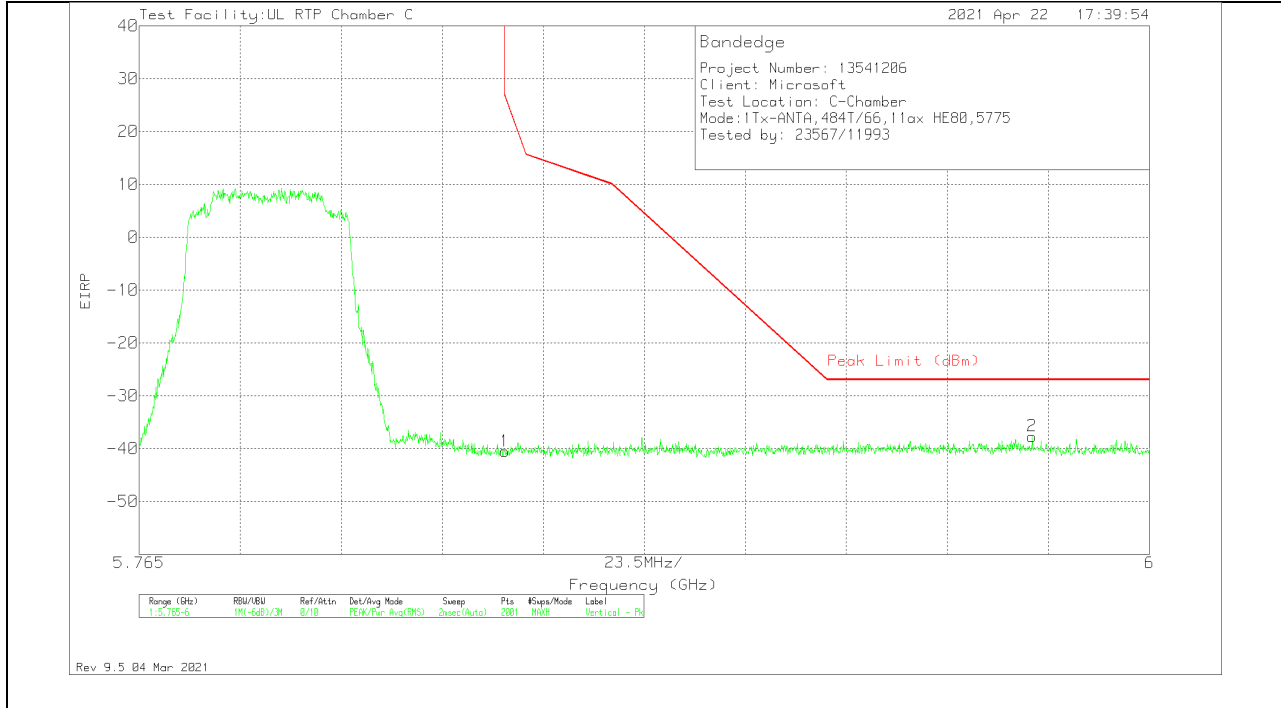


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-75.52	Pk	35.1	-11.9	11.8	-40.52	26.84	-67.36	194	153	V
2	5.97274	-73.07	Pk	35.4	-11.8	11.8	-37.67	-27	-10.67	194	153	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

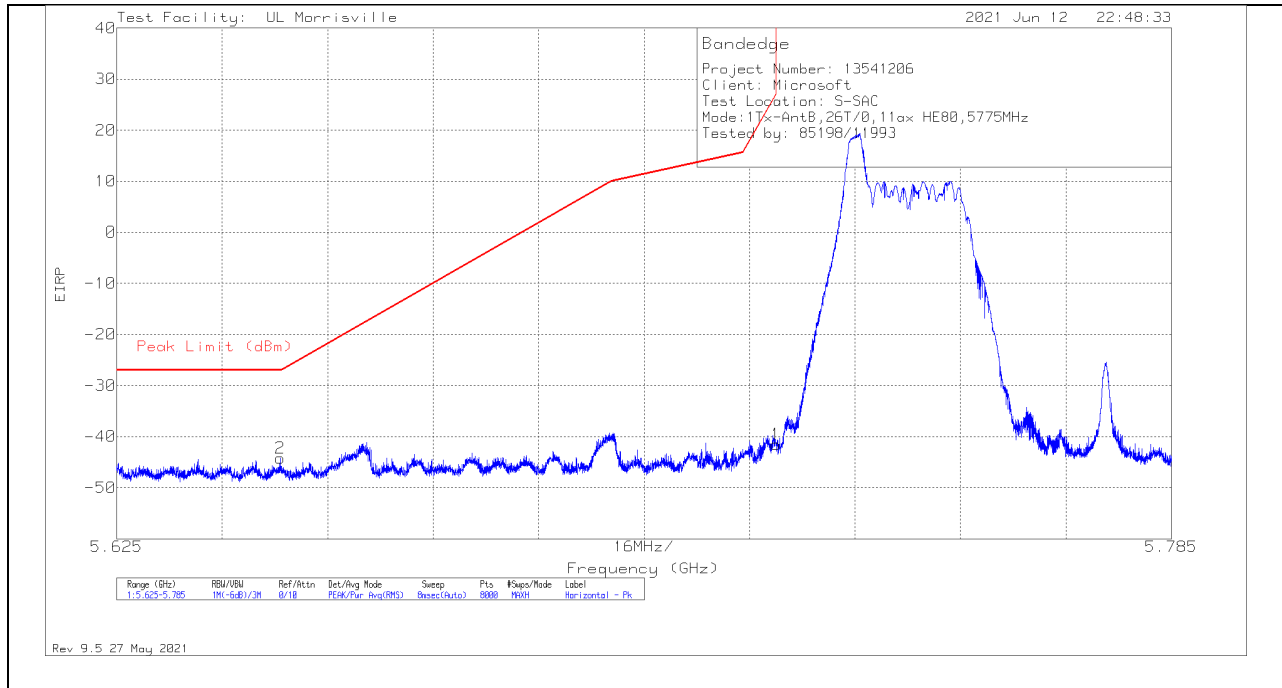

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64976	-67.37	Pk	34.7	-23.4	11.8	-44.27	-27	-17.27	37	286	H
1	5.725	-64.6	Pk	34.8	-23.5	11.8	-41.5	26.99	-68.49	37	286	H

Pk - Peak detector

VERTICAL RESULT

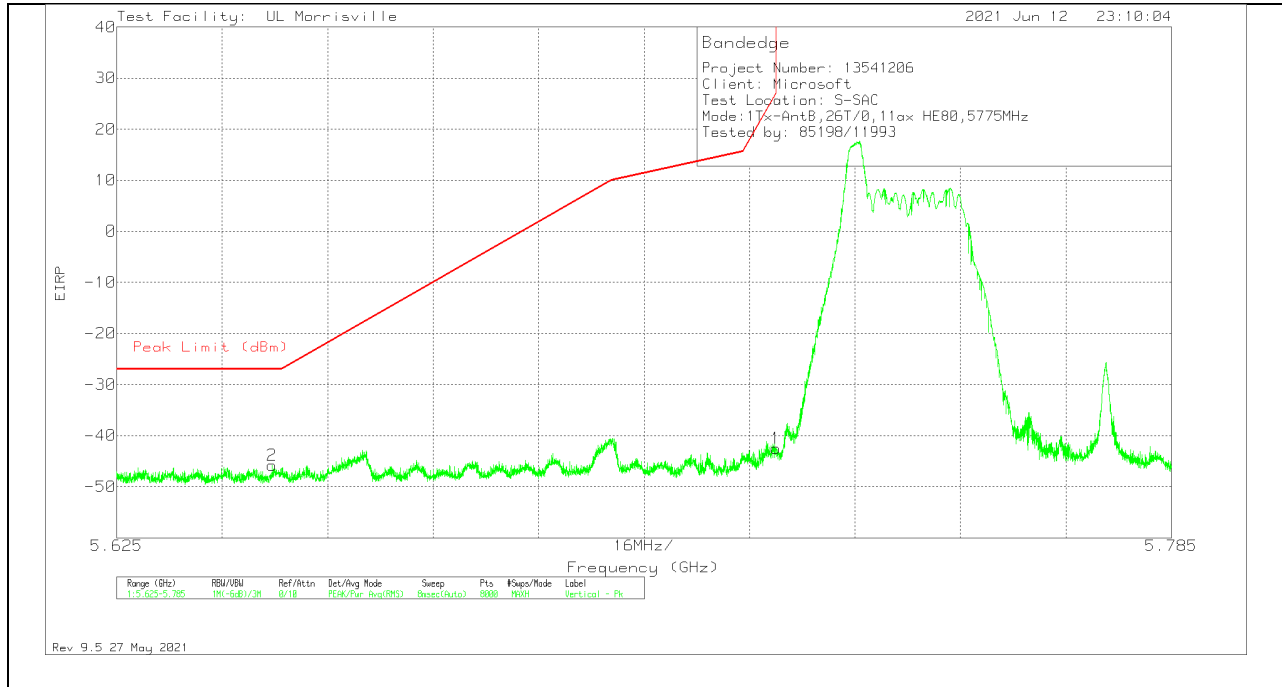


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64858	-69	Pk	34.7	-23.3	11.8	-45.8	-27	-18.8	54	203	V
1	5.725	-65.6	Pk	34.8	-23.5	11.8	-42.5	26.99	-69.49	54	203	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 37

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

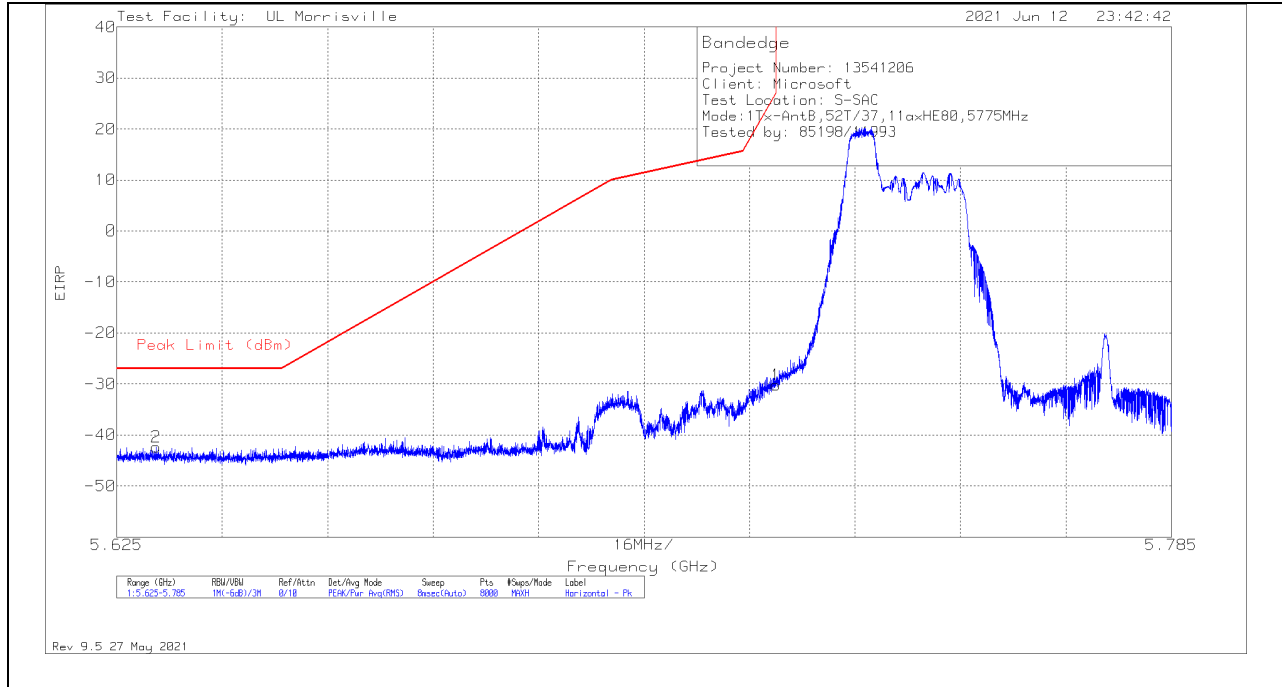

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63094	-65.52	Pk	34.7	-23.3	11.8	-42.32	-27	-15.32	26	151	H
1	5.725	-53.36	Pk	34.8	-23.5	11.8	-30.26	26.99	-57.25	26	151	H

Pk - Peak detector

VERTICAL RESULT

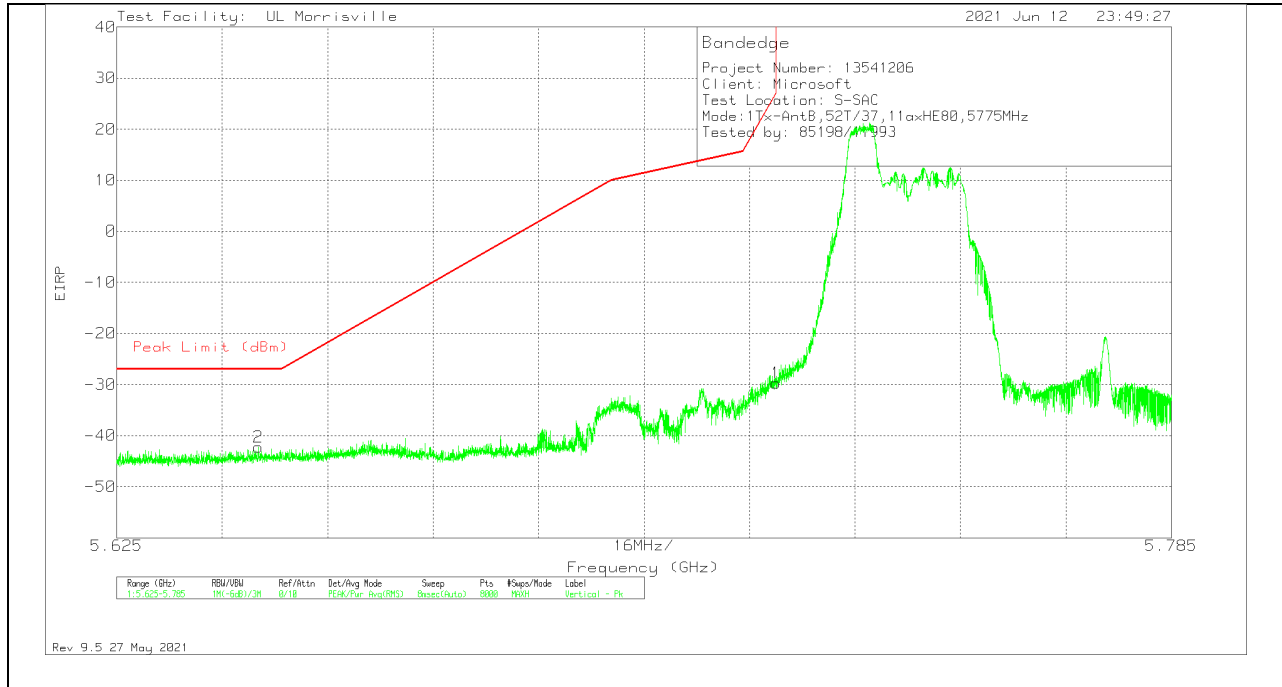


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64646	-65.42	Pk	34.7	-23.3	11.8	-42.22	-27	-15.22	29	156	V
1	5.725	-52.86	Pk	34.8	-23.5	11.8	-29.76	26.99	-56.75	29	156	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

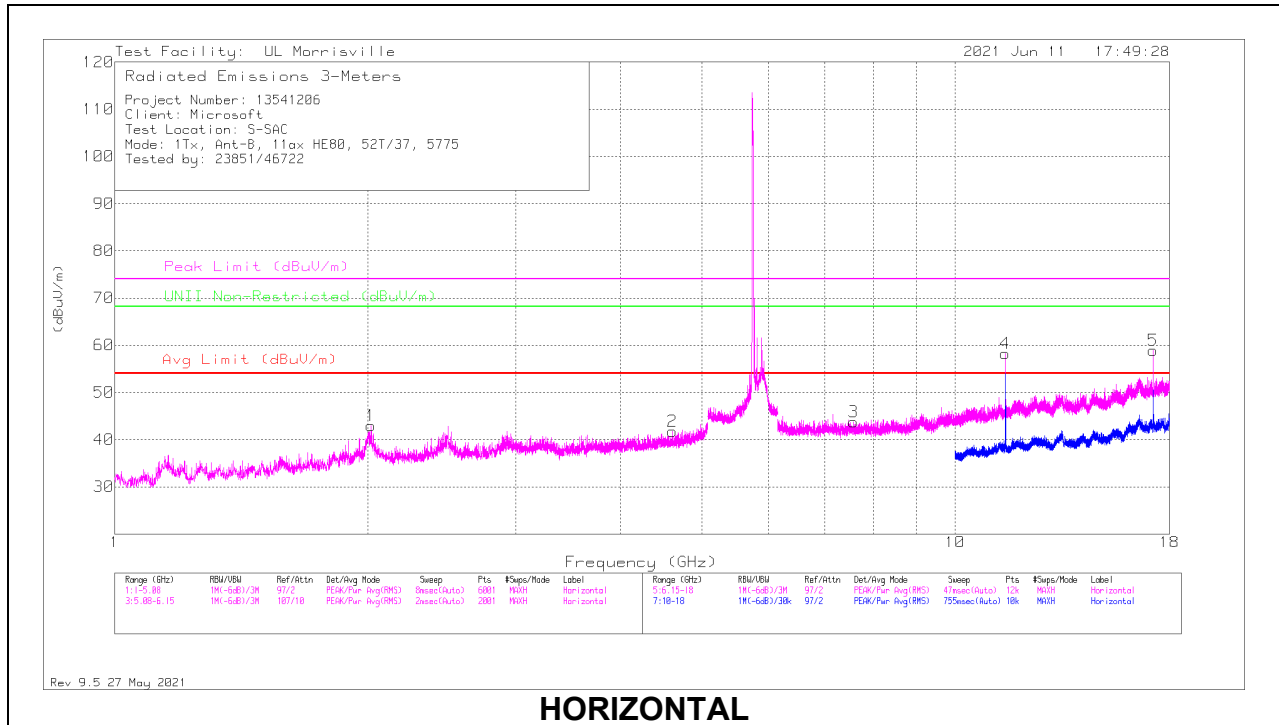

HORIZONTAL

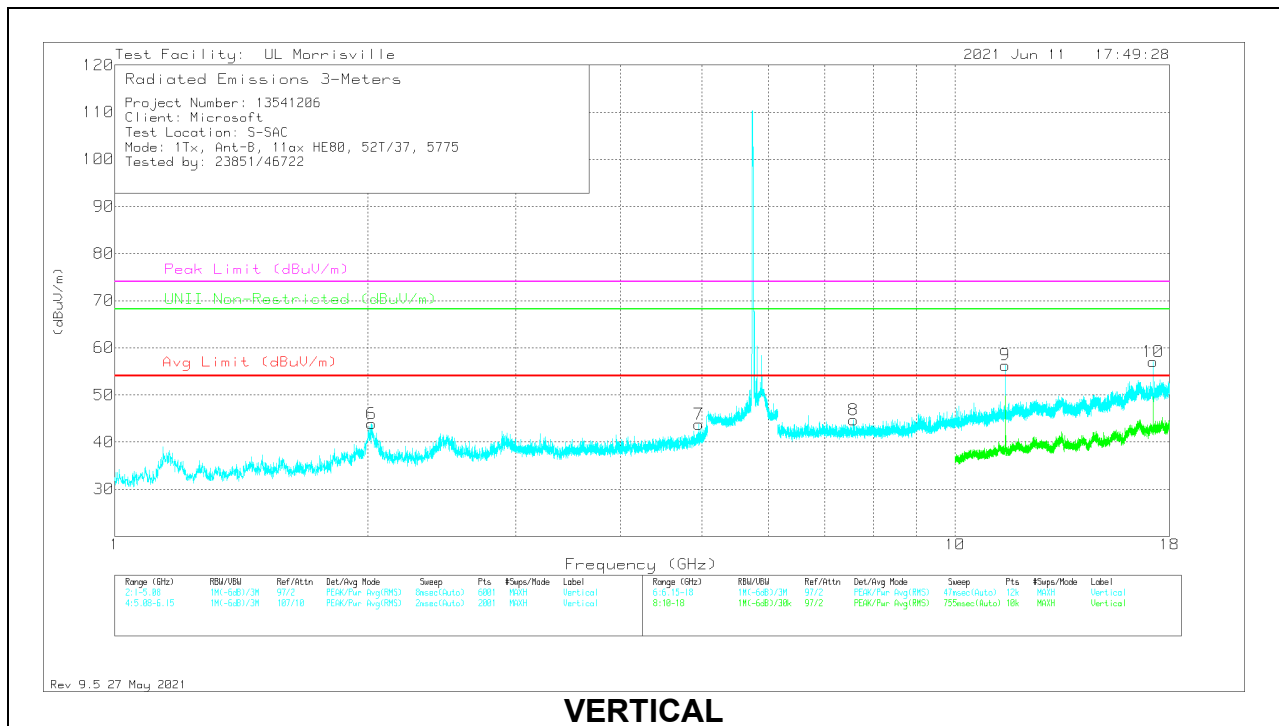

VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 2.01864	46.4	Pk	31	-34.4	43	54	-11	74	-31	68.2	-25.2	0-360	200	H
2	*** 4.61216	38.96	Pk	34.1	-31.3	41.76	54	-12.24	74	-32.24	-	-	0-360	200	H
6	** 2.02068	47.25	Pk	31	-34.4	43.85	54	-10.15	74	-30.15	68.2	-24.35	0-360	101	V
7	*** 4.9542	39.12	Pk	34	-29.4	43.72	54	-10.28	74	-30.28	-	-	0-360	101	V
3	*** 7.57299	35.66	Pk	35.6	-27.5	43.76	54	-10.24	74	-30.24	-	-	0-360	101	H
4	*** 11.47842	50.18	PK-U	38.1	-24.6	63.68	-	-	74	-10.32	-	-	257	110	H
	*** 11.47658	37.1	ADV	38.1	-24.6	50.6	54	-3.4	-	-	-	-	257	110	H
8	*** 7.5799	36.71	Pk	35.6	-27.6	44.71	54	-9.29	74	-29.29	-	-	0-360	101	V
9	*** 11.47702	47.7	PK-U	38.1	-24.6	61.2	-	-	74	-12.8	-	-	206	101	V
	*** 11.47665	34.79	ADV	38.1	-24.6	48.29	54	-5.71	-	-	-	-	206	101	V
10	17.21387	43.26	PK-U	41.5	-24.1	60.66	-	-	-	-	68.2	-7.54	243	166	V
5	17.21325	46.21	PK-U	41.5	-24.1	63.61	-	-	-	-	68.2	-4.59	229	204	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - U-NII: Maximum Peak
 ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

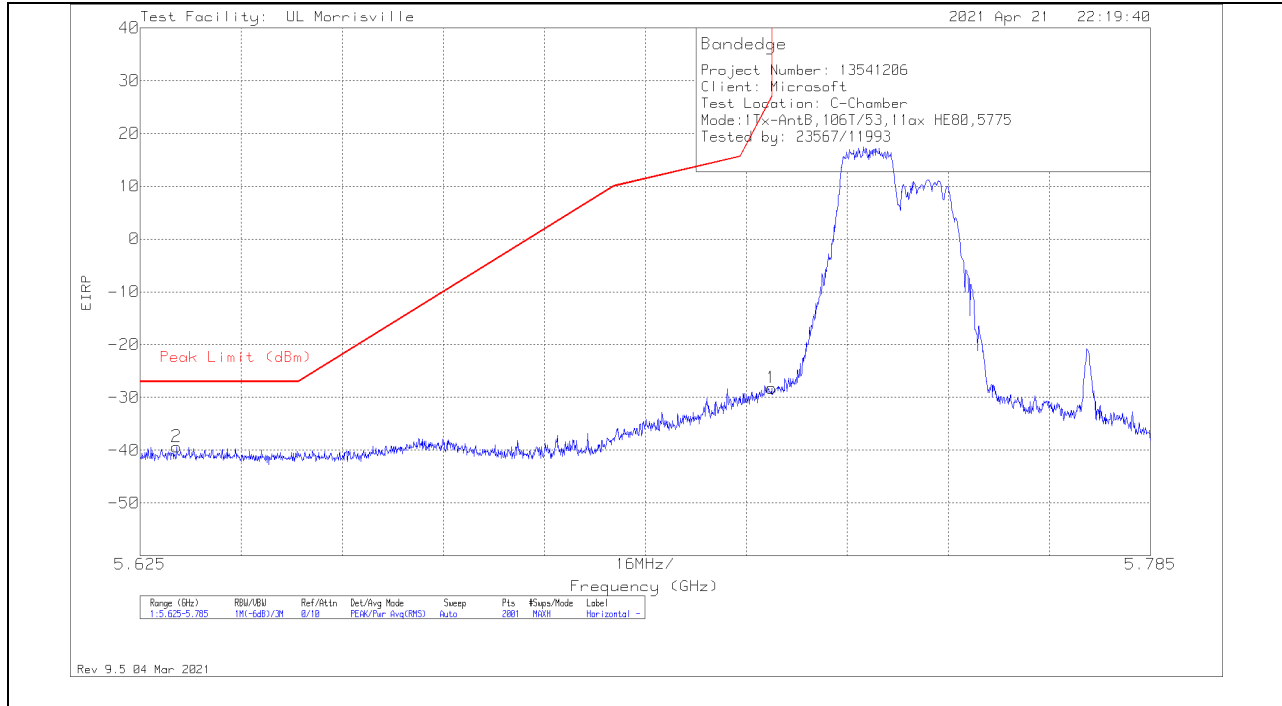

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63076	-73.53	Pk	34.8	-12.4	11.8	-39.33	-27	-12.33	248	195	H
1	5.725	-62.11	Pk	34.8	-12.7	11.8	-28.21	27	-55.21	248	195	H

Pk - Peak detector

VERTICAL RESULT

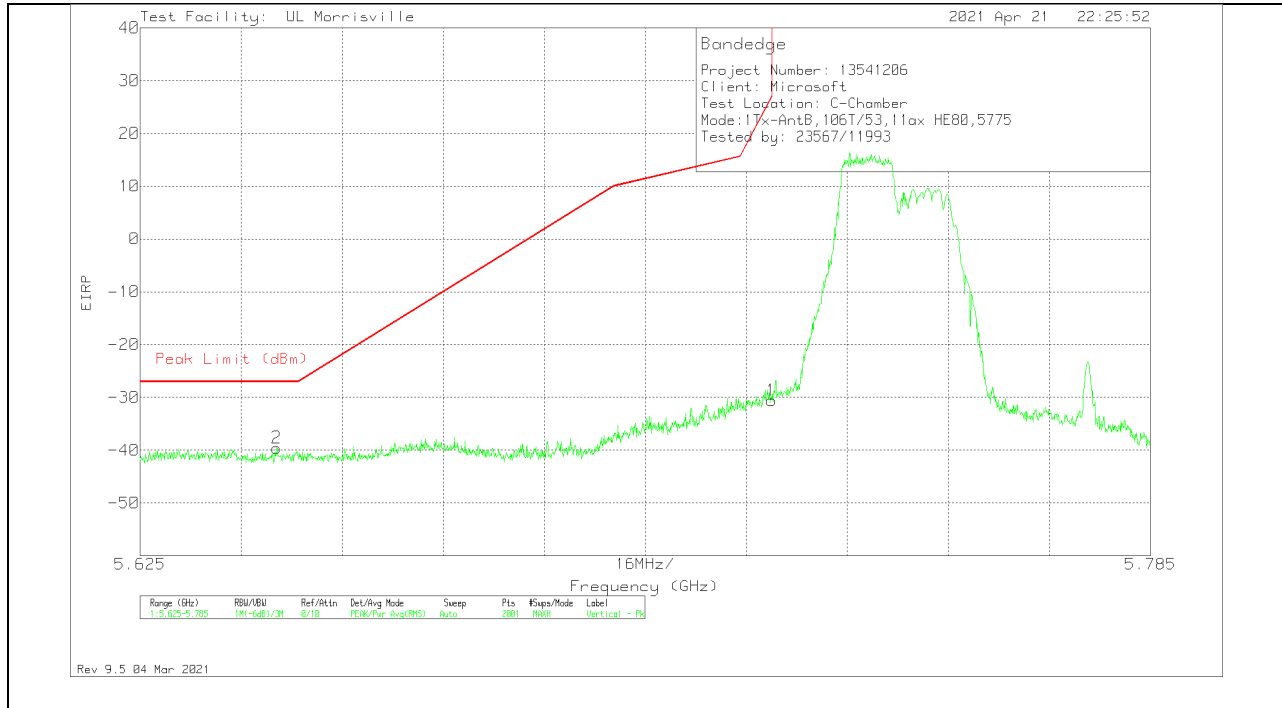


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6466	-73.2	Pk	34.8	-13	11.8	-39.6	-27	-12.6	236	221	V
1	5.725	-64.49	Pk	34.8	-12.7	11.8	-30.59	27	-57.59	236	221	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

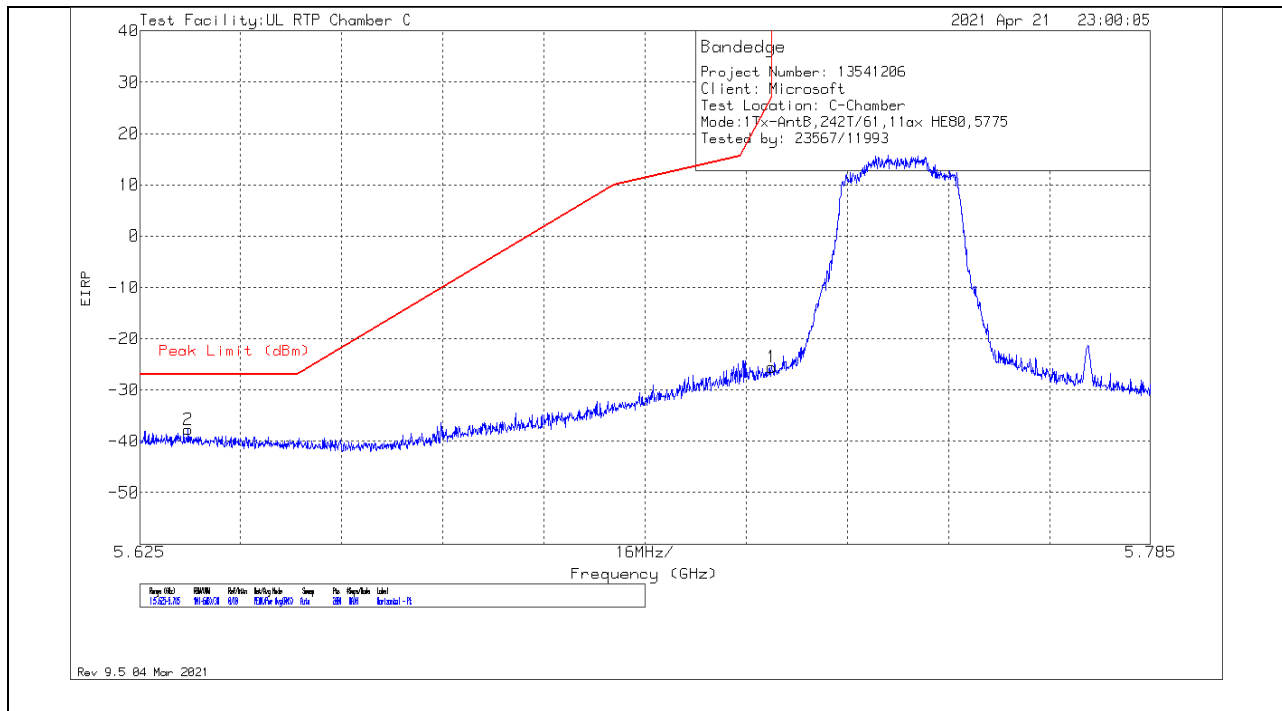

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63268	-71.98	Pk	34.8	-12.3	11.8	-37.68	-27	-10.68	202	247	H
1	5.725	-59.47	Pk	34.8	-12.7	11.8	-25.57	27	-52.57	202	247	H

Pk - Peak detector

VERTICAL RESULT

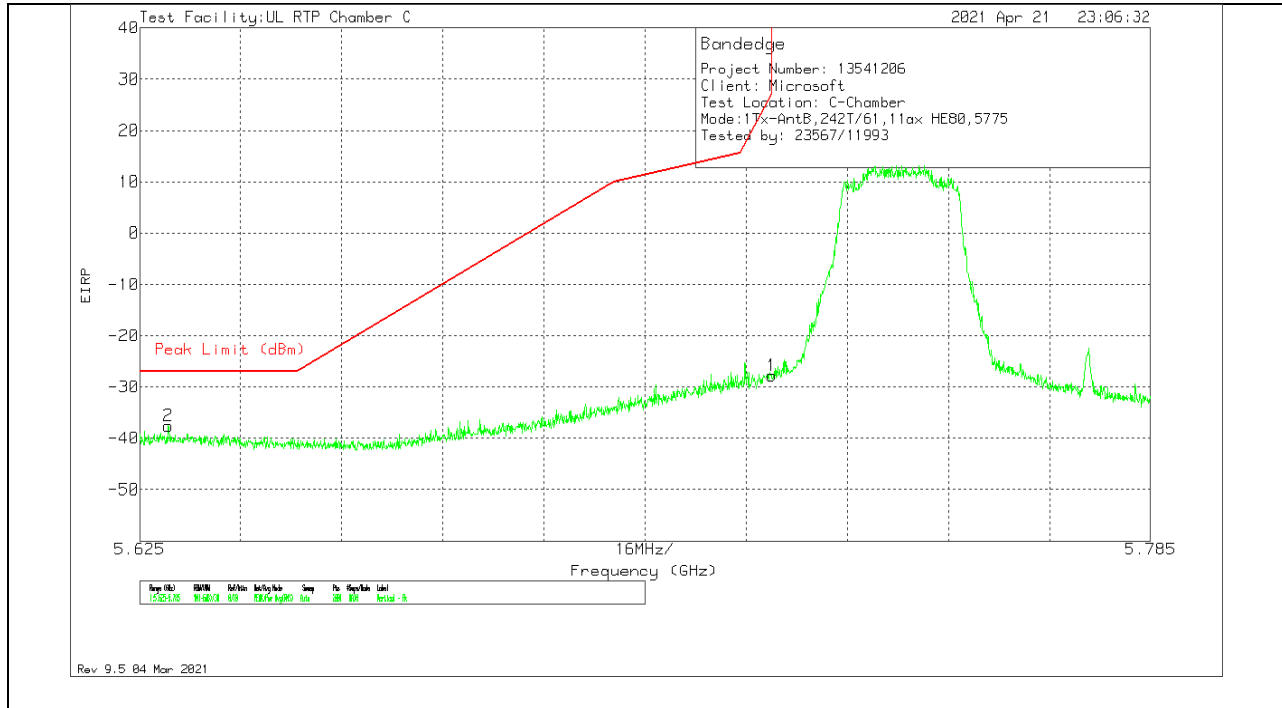


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62956	-71.78	Pk	34.8	-12.4	11.8	-37.58	-27	-10.58	188	101	V
1	5.725	-61.68	Pk	34.8	-12.7	11.8	-27.78	27	-54.78	188	101	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

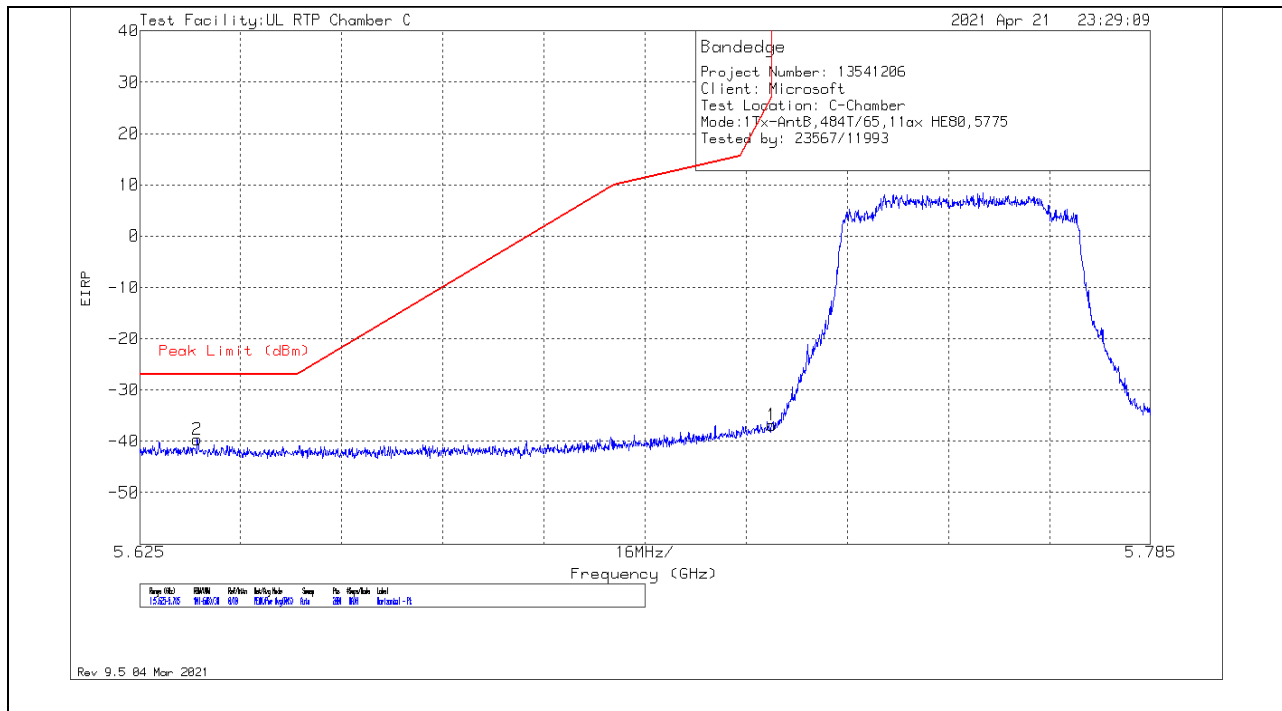

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63412	-73.79	Pk	34.8	-12.4	11.8	-39.59	-27	-12.59	219	211	H
1	5.725	-70.77	Pk	34.8	-12.7	11.8	-36.87	27	-63.87	219	211	H

Pk - Peak detector

VERTICAL RESULT

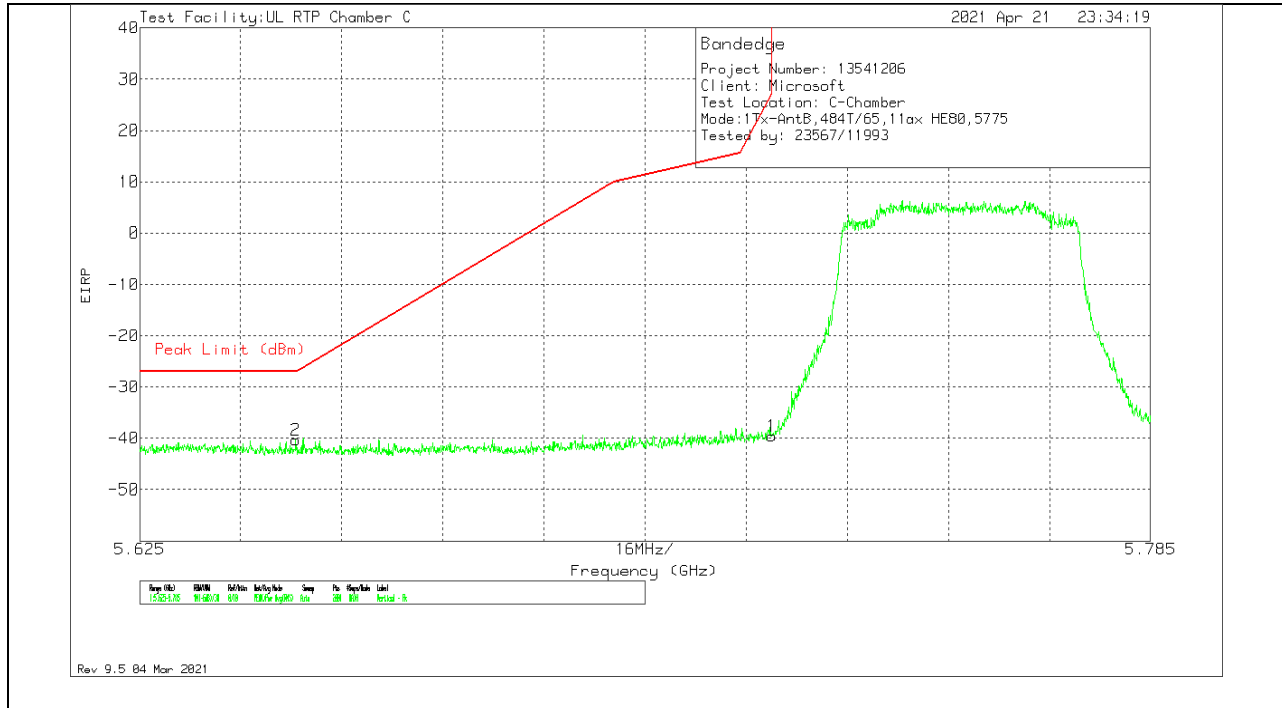


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64972	-73.93	Pk	34.8	-13	11.8	-40.33	-27	-13.33	215	243	V
1	5.725	-73.48	Pk	34.8	-12.7	11.8	-39.58	27	-66.58	215	243	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: SU, Single User

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

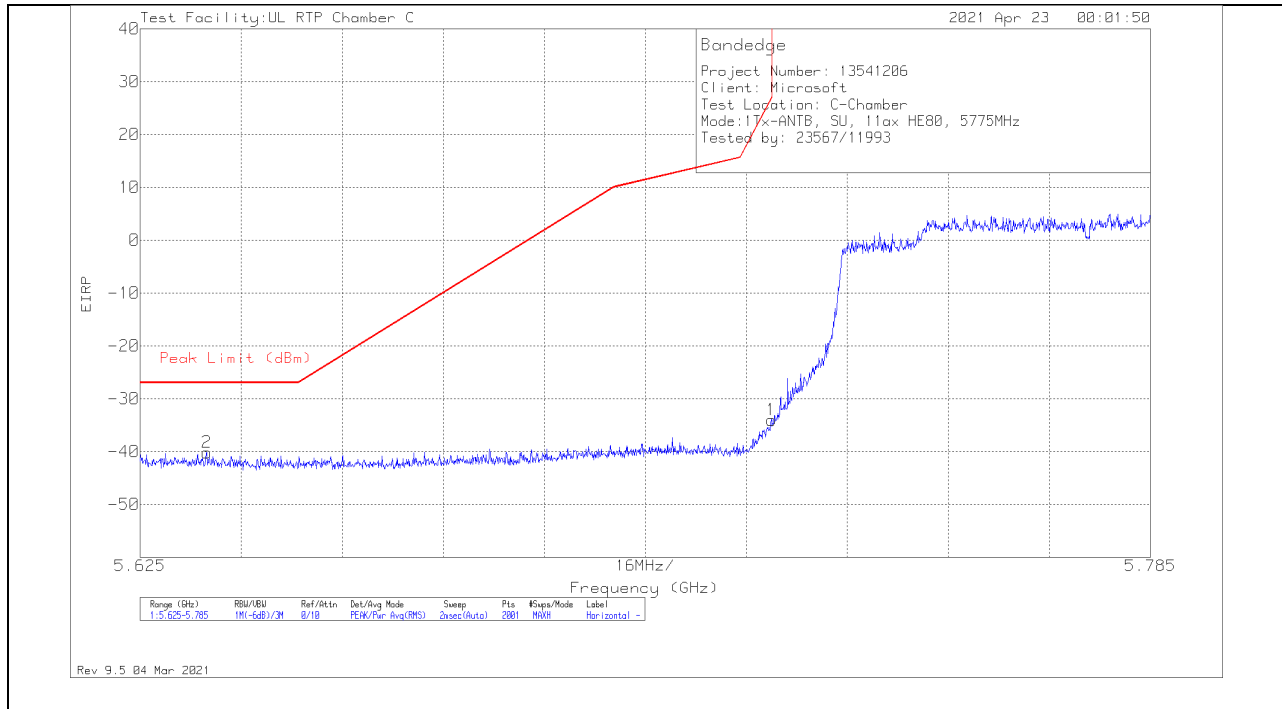

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63556	-74.29	Pk	34.8	-12.5	11.8	-40.19	-27	-13.19	23	193	H
1	5.725	-67.93	Pk	34.8	-12.7	11.8	-34.03	27	-61.03	23	193	H

Pk - Peak detector

VERTICAL RESULT

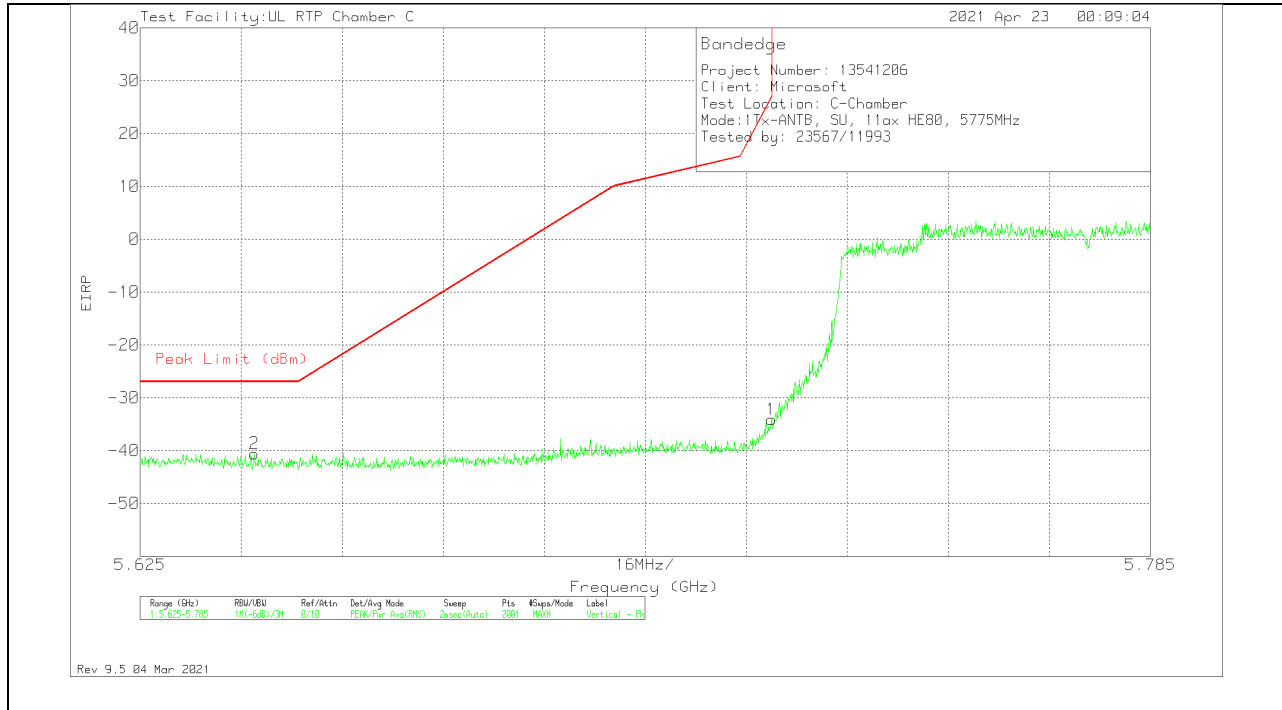


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64308	-74.2	Pk	34.8	-13	11.8	-40.6	-27	-13.6	24	173	V
1	5.725	-68.03	Pk	34.8	-12.7	11.8	-34.13	27	-61.13	24	173	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

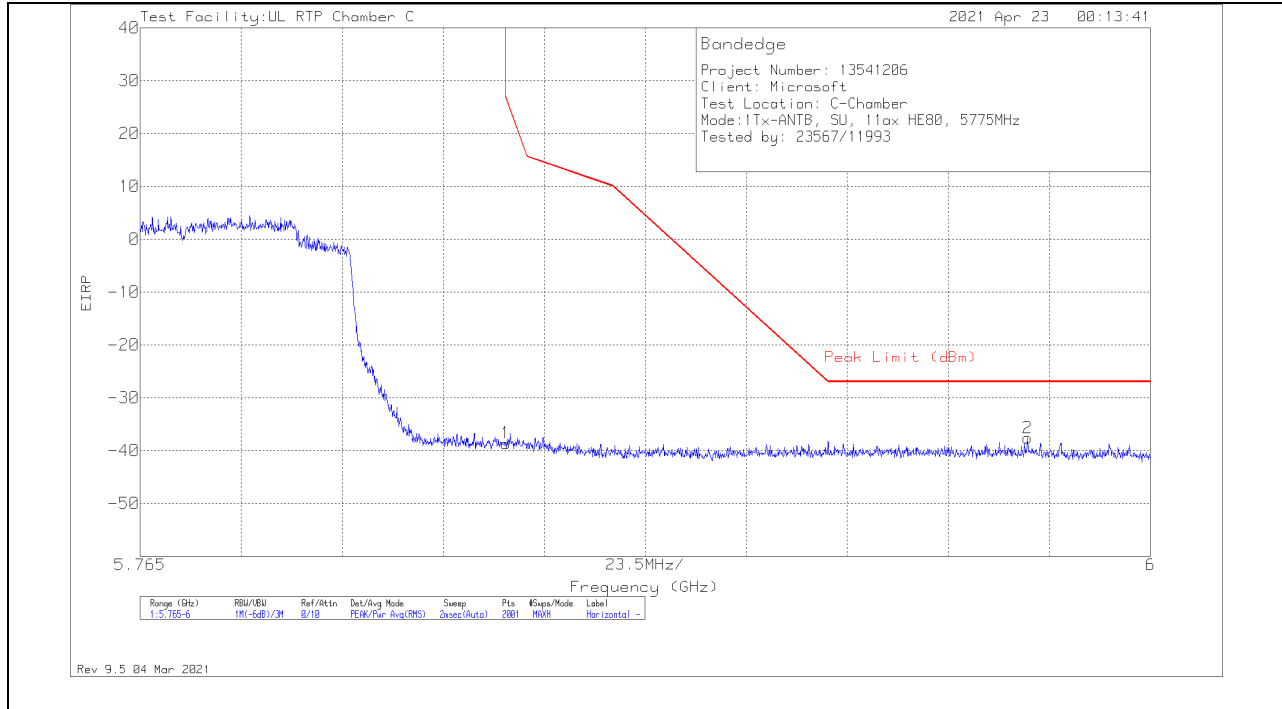

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-73.63	Pk	35.1	-11.9	11.8	-38.63	26.84	-65.47	334	154	H
2	5.97145	-73.02	Pk	35.4	-11.8	11.8	-37.62	-27	-10.62	334	154	H

Pk - Peak detector

VERTICAL RESULT

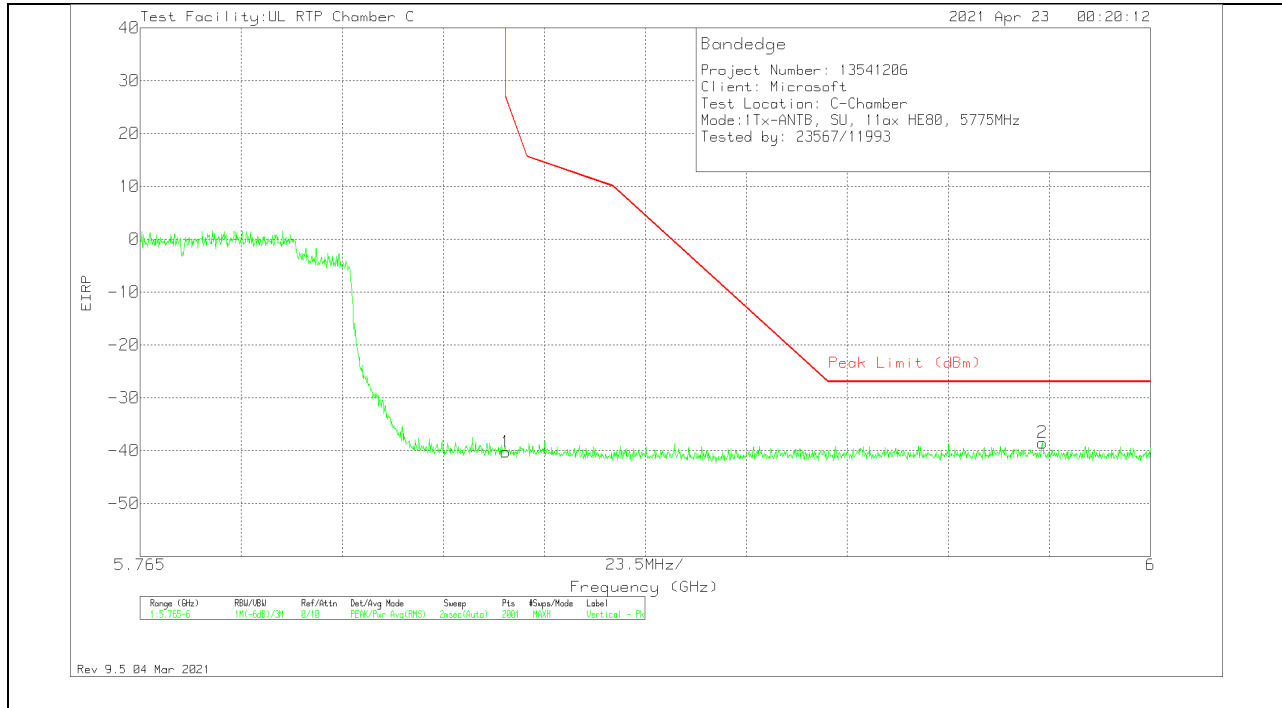


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-75.28	Pk	35.1	-11.9	11.8	-40.28	26.84	-67.12	71	103	V
2	5.97486	-73.91	Pk	35.4	-11.8	11.8	-38.51	-27	-11.51	71	103	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

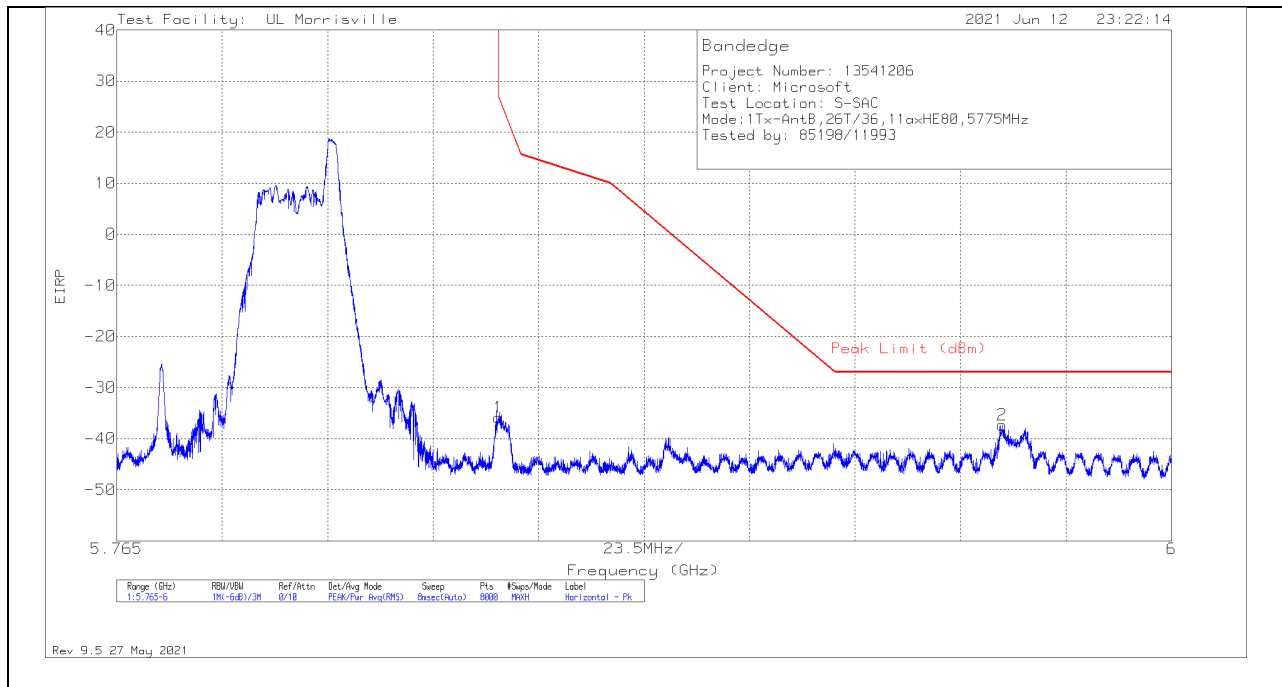

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-59.73	Pk	35.2	-23.1	11.8	-35.83	26.95	-62.78	26	221	H
2	5.96225	-61.46	Pk	35.2	-22.9	11.8	-37.36	-27	-10.36	26	221	H

Pk - Peak detector

VERTICAL RESULT

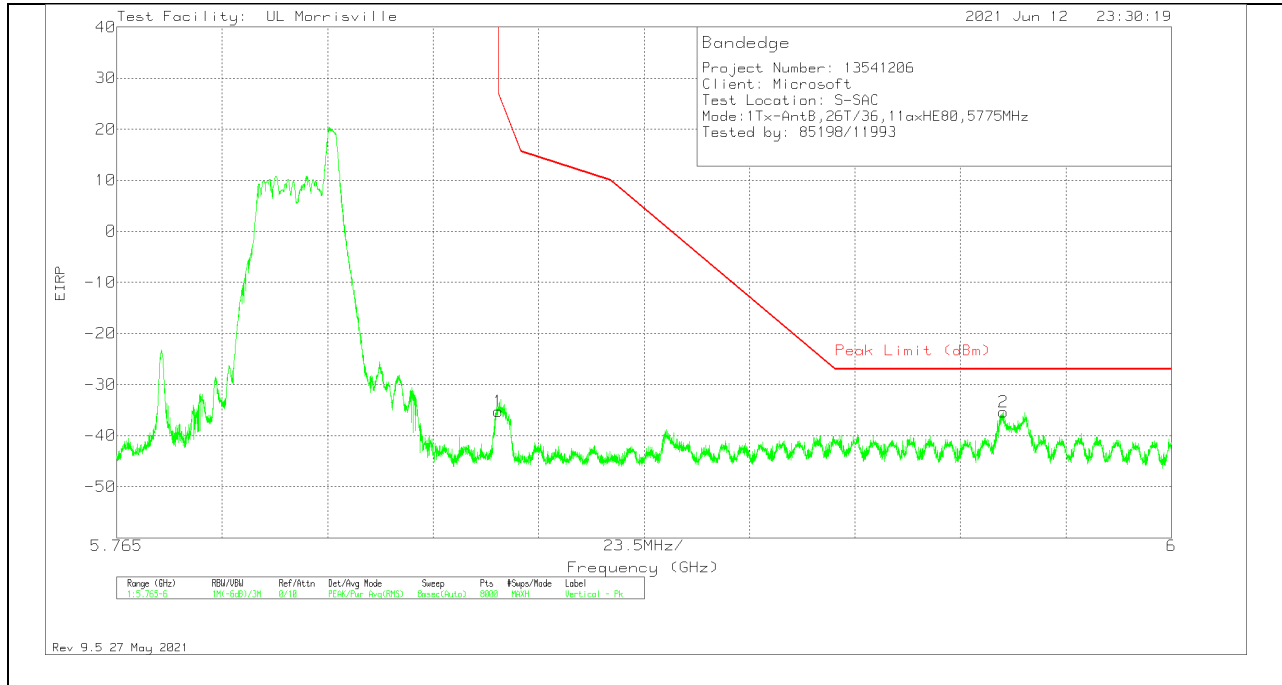


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-59.13	Pk	35.2	-23.1	11.8	-35.23	26.95	-62.18	26	160	V
2	5.96263	-59.52	Pk	35.2	-22.9	11.8	-35.42	-27	-8.42	26	160	V

Pk - Peak detector


1TX Antenna B OFDMA MODE: 52-Tones, RU Index 44

HARMONICS AND SPURIOUS EMISSIONS

MID

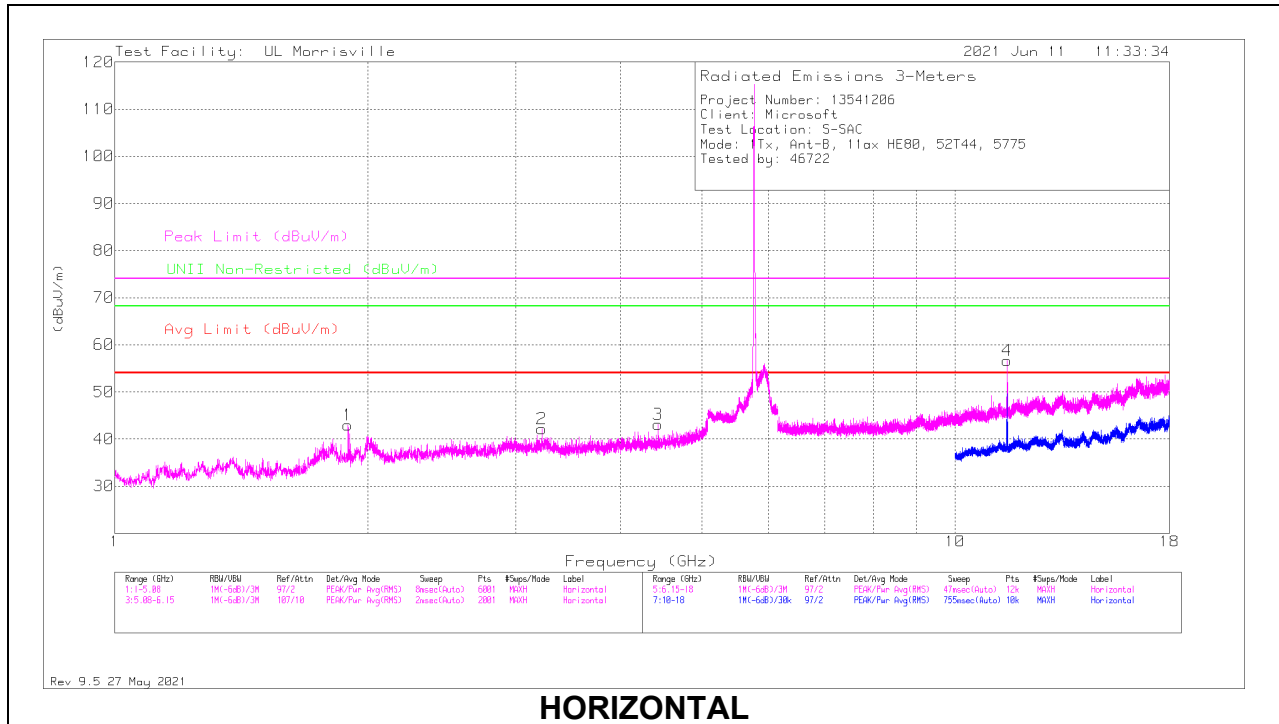

HORIZONTAL

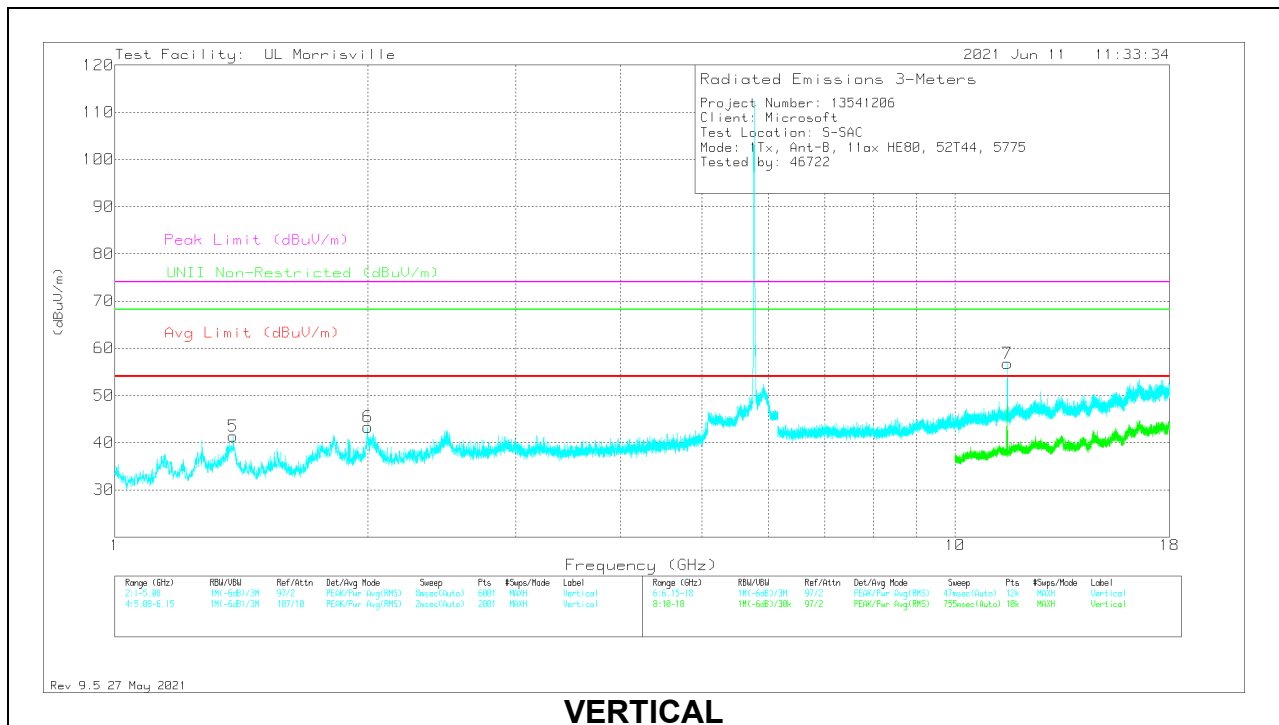

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 1.89556	46.36	Pk	30.9	-34.3	42.96	54	-11.04	74	-31.04	68.2	-25.24	0-360	199	H
5	*** 1.3842	47.05	Pk	29	-34.7	41.35	54	-12.65	74	-32.65	-	-	0-360	101	V
4	* ** 11.54222	47.61	PK-U	38.2	-24.8	61.01	-	-	74	-12.99	-	-	168	112	H
	* ** 11.54259	34.93	ADV	38.2	-24.8	48.33	54	-5.67	-	-	-	-	168	112	H
7	* ** 11.54405	45.82	PK-U	38.2	-24.8	59.22	-	-	74	-14.78	-	-	127	233	V
	* ** 11.54389	33.16	ADV	38.2	-24.8	46.56	54	-7.44	-	-	-	-	127	233	V
6	1.9996	46	Pk	31.5	-34.2	43.3	54	-10.7	74	-30.7	68.2	-24.9	0-360	199	V
2	3.22292	42.37	Pk	33.3	-33.5	42.17	54	-11.83	74	-31.83	68.2	-26.03	0-360	199	H
3	4.4306	40.65	Pk	33.7	-31.2	43.15	54	-10.85	74	-30.85	68.2	-25.05	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 52

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

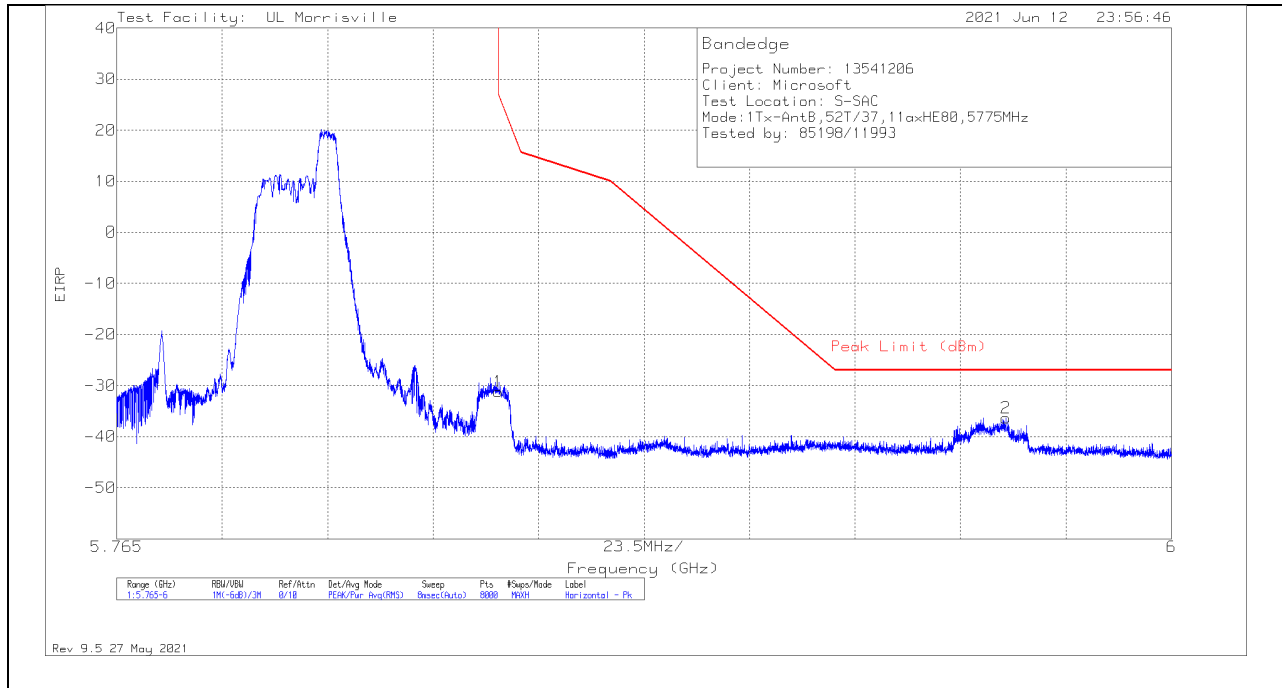

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-55.12	Pk	35.2	-23.1	11.8	-31.22	26.95	-58.17	33	278	H
2	5.96316	-60.43	Pk	35.2	-22.9	11.8	-36.33	-27	-9.33	33	278	H

Pk - Peak detector

VERTICAL RESULT


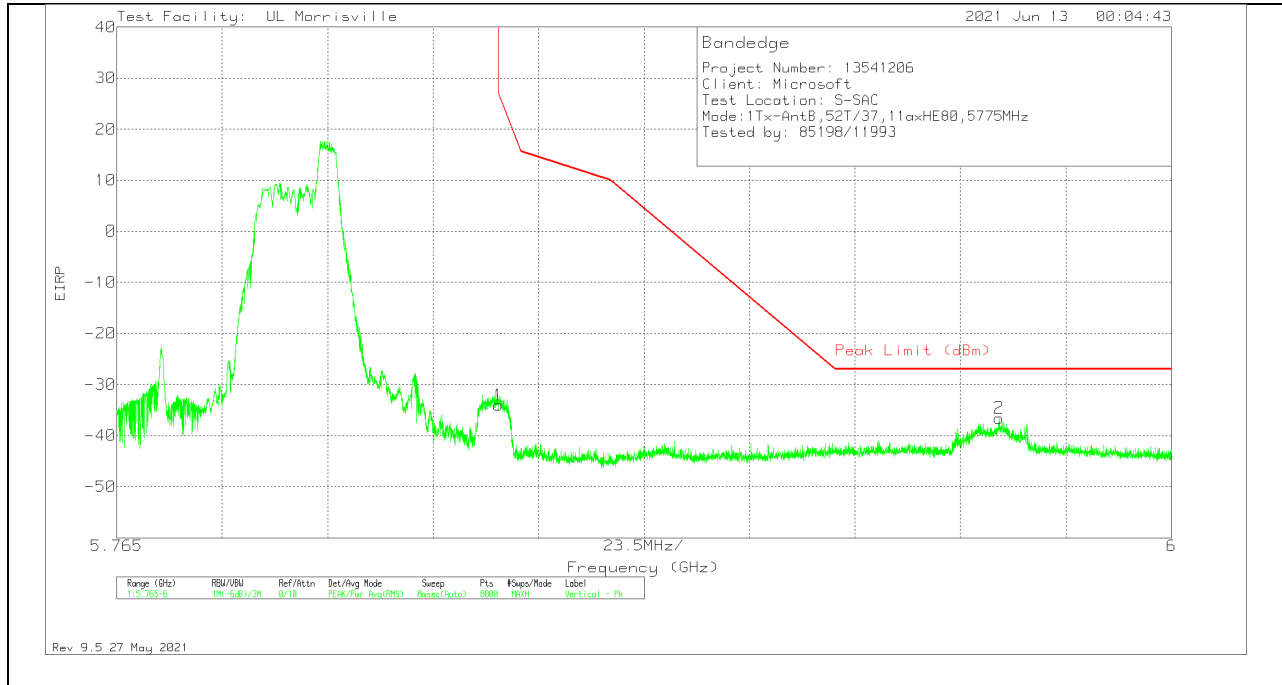


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-57.92	Pk	35.2	-23.1	11.8	-34.02	26.95	-60.97	55	129	V
2	5.96157	-60.74	Pk	35.2	-22.8	11.8	-36.54	-27	-9.54	55	129	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID

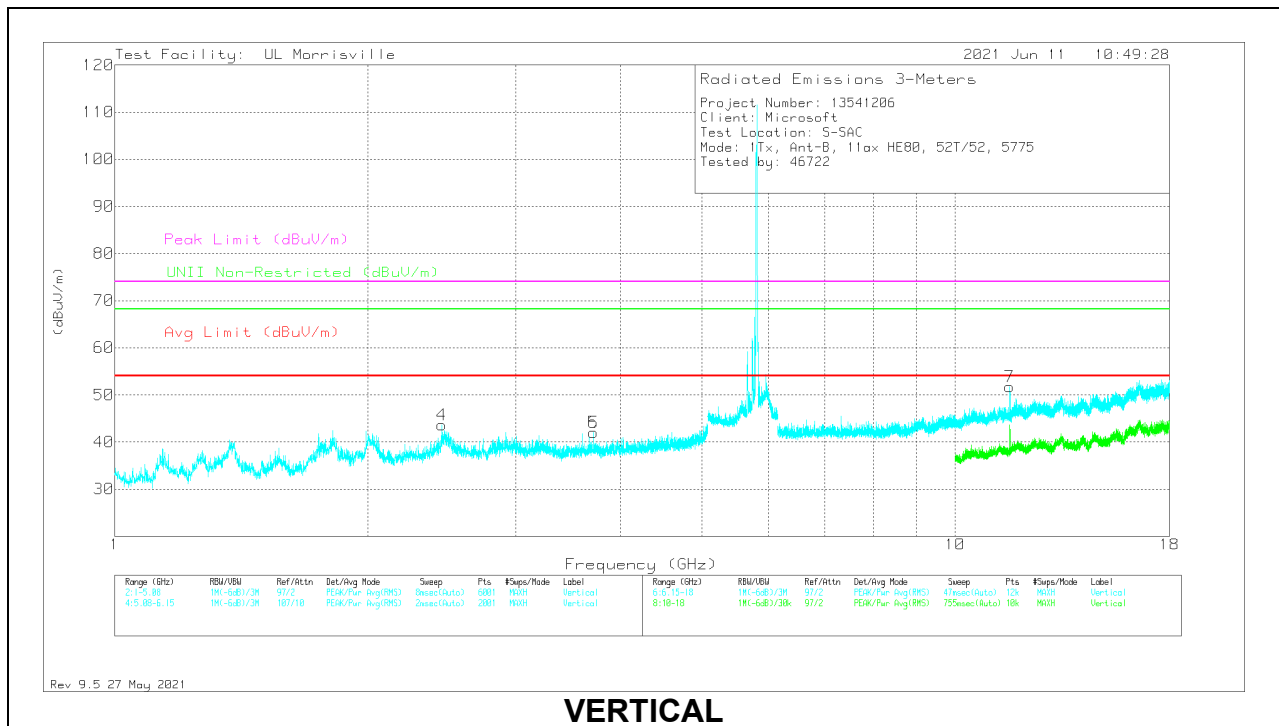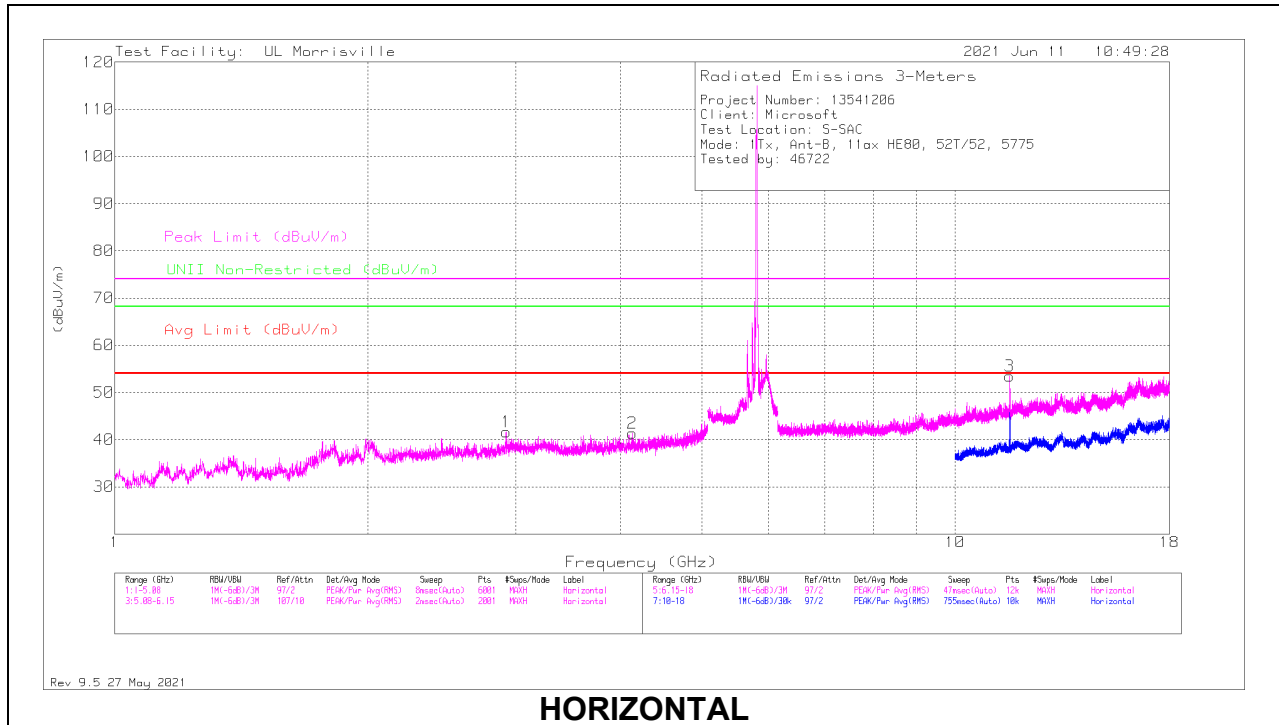

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 4.128	39.45	Pk	33.5	-31.6	41.35	54	-12.65	74	-32.65	-	-	0-360	101	H
5	* ** 3.71184	40.94	Pk	33.4	-32.3	42.04	54	-11.96	74	-31.96	-	-	0-360	101	V
6	* ** 3.71184	40.94	Pk	33.4	-32.3	42.04	54	-11.96	74	-31.96	-	-	0-360	101	V
3	* ** 11.62406	42.86	PK-U	38.2	-24.9	56.16	-	-	74	-17.84	-	-	179	121	H
	* ** 11.62414	30.88	ADV	38.2	-24.9	44.18	54	-9.82	-	-	-	-	179	121	H
7	* ** 11.62496	43.59	PK-U	38.2	-24.9	56.89	-	-	74	-17.11	-	-	121	234	V
	* ** 11.6238	31.3	ADV	38.2	-24.9	44.6	54	-9.4	-	-	-	-	121	234	V
4	2.45112	45.27	Pk	32.5	-34.1	43.67	54	-10.33	74	-30.33	68.2	-24.53	0-360	101	V
1	2.92304	42.01	Pk	33.1	-33.5	41.61	54	-12.39	74	-32.39	68.2	-26.59	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - U-NII: Maximum Peak

ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 60

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

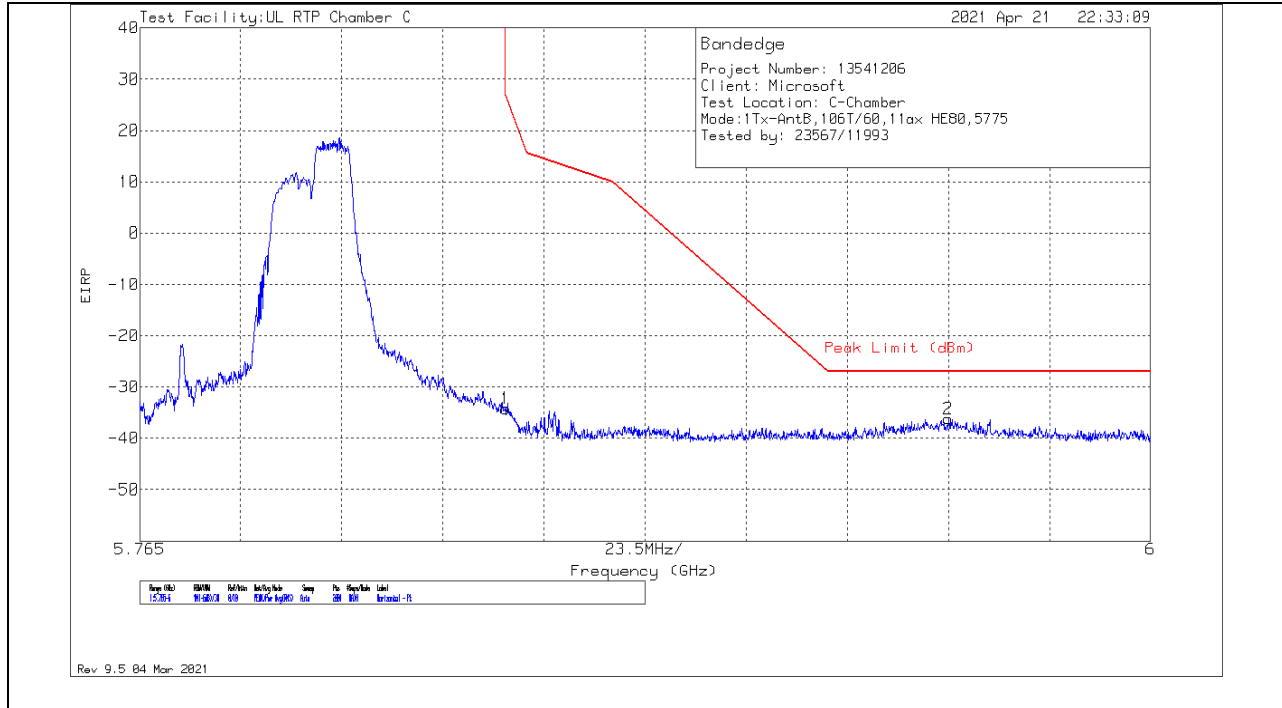

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-69.24	Pk	35.1	-11.9	11.8	-34.24	26.84	-61.08	245	211	H
2	5.953	-71.28	Pk	35.4	-12.1	11.8	-36.18	-27	-9.18	245	211	H

Pk - Peak detector

VERTICAL RESULT

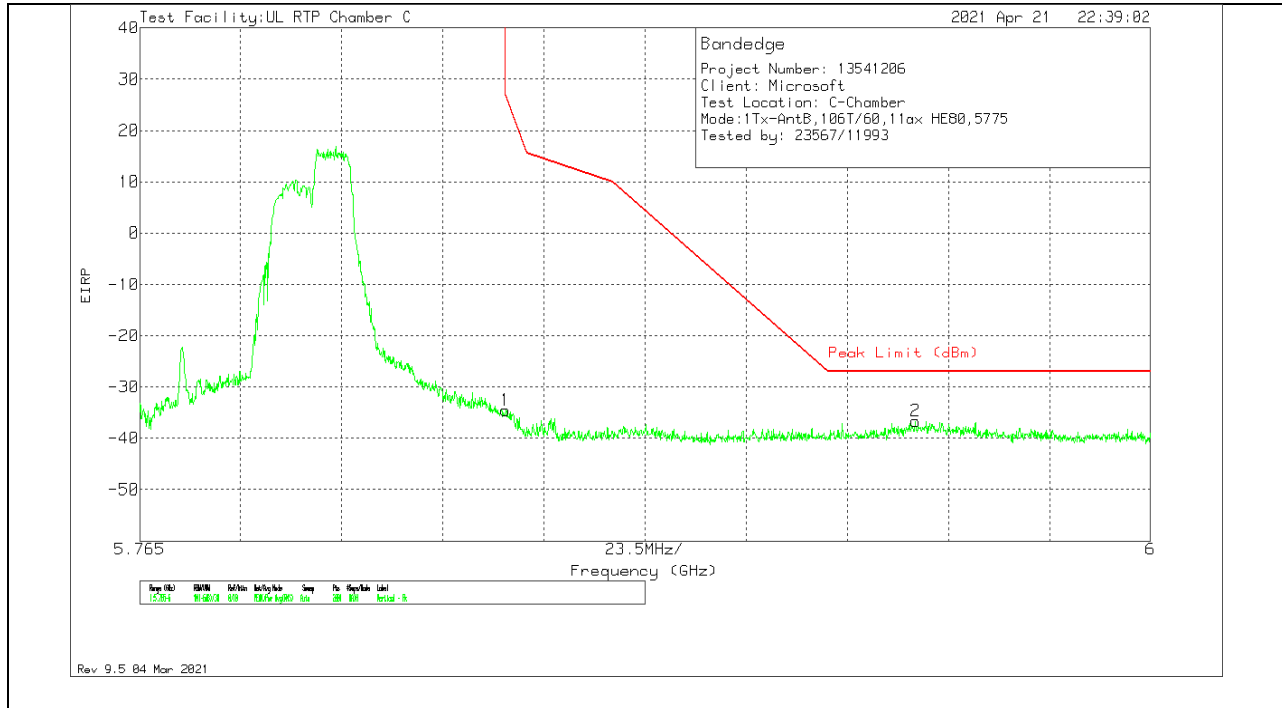


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-69.51	Pk	35.1	-11.9	11.8	-34.51	26.84	-61.35	190	205	V
2	5.94536	-71.76	Pk	35.3	-12	11.8	-36.66	-27	-9.66	190	205	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 64

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

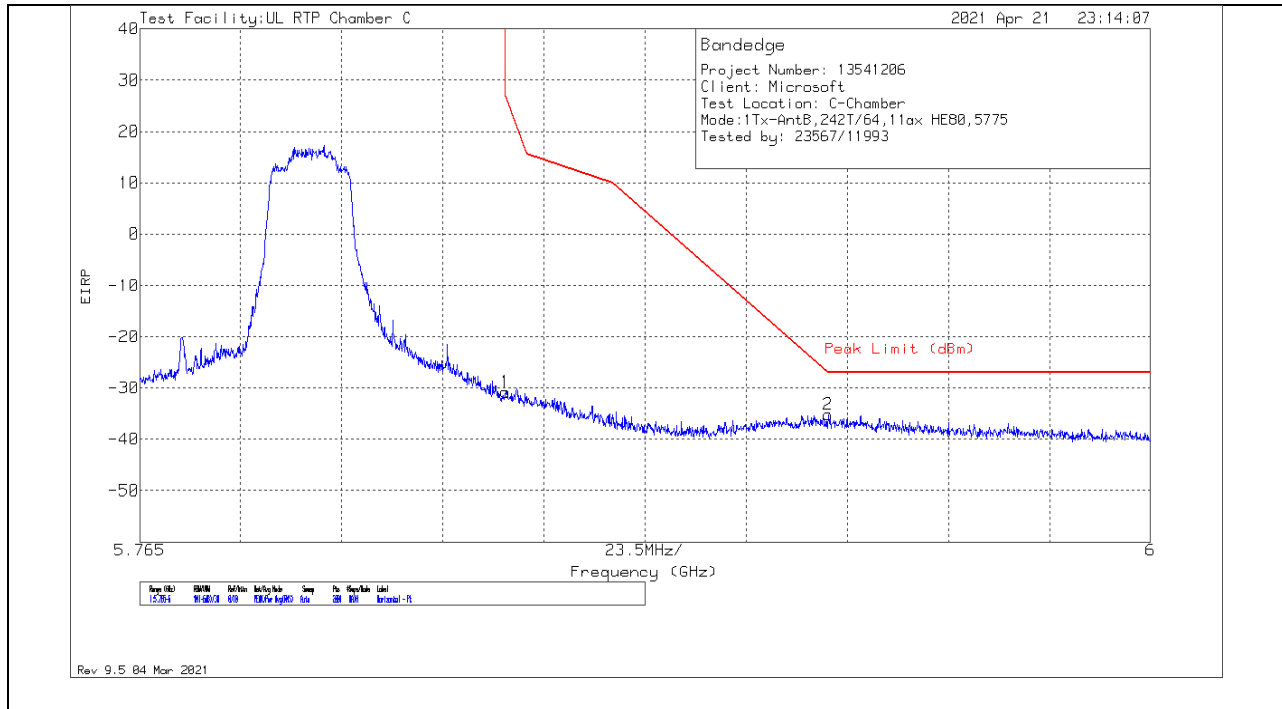

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-65.75	Pk	35.1	-11.9	11.8	-30.75	26.84	-57.59	130	102	H
2	5.92504	-70.37	Pk	35.3	-11.9	11.8	-35.17	-27	-8.17	130	102	H

Pk - Peak detector

VERTICAL RESULT

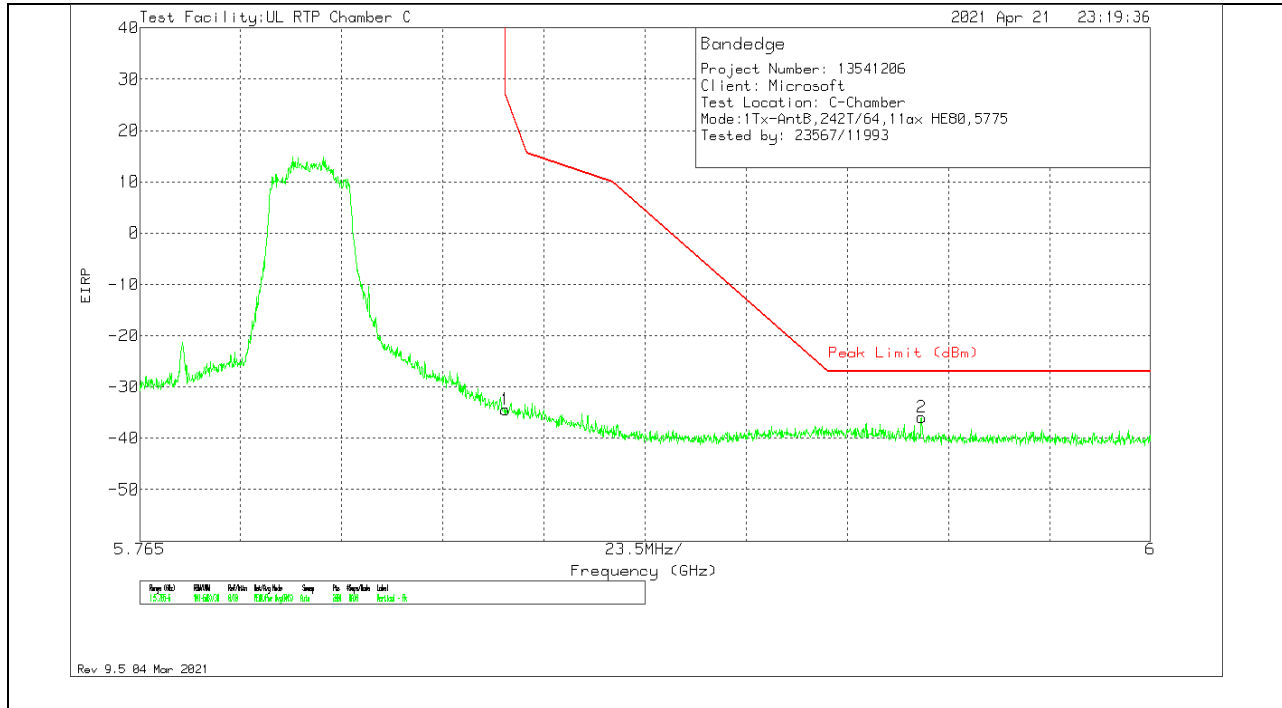


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-69.42	Pk	35.1	-11.9	11.8	-34.42	26.84	-61.26	230	250	V
2	5.94677	-71.05	Pk	35.3	-12	11.8	-35.95	-27	-8.95	230	250	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 484-Tones, RU Index 66

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

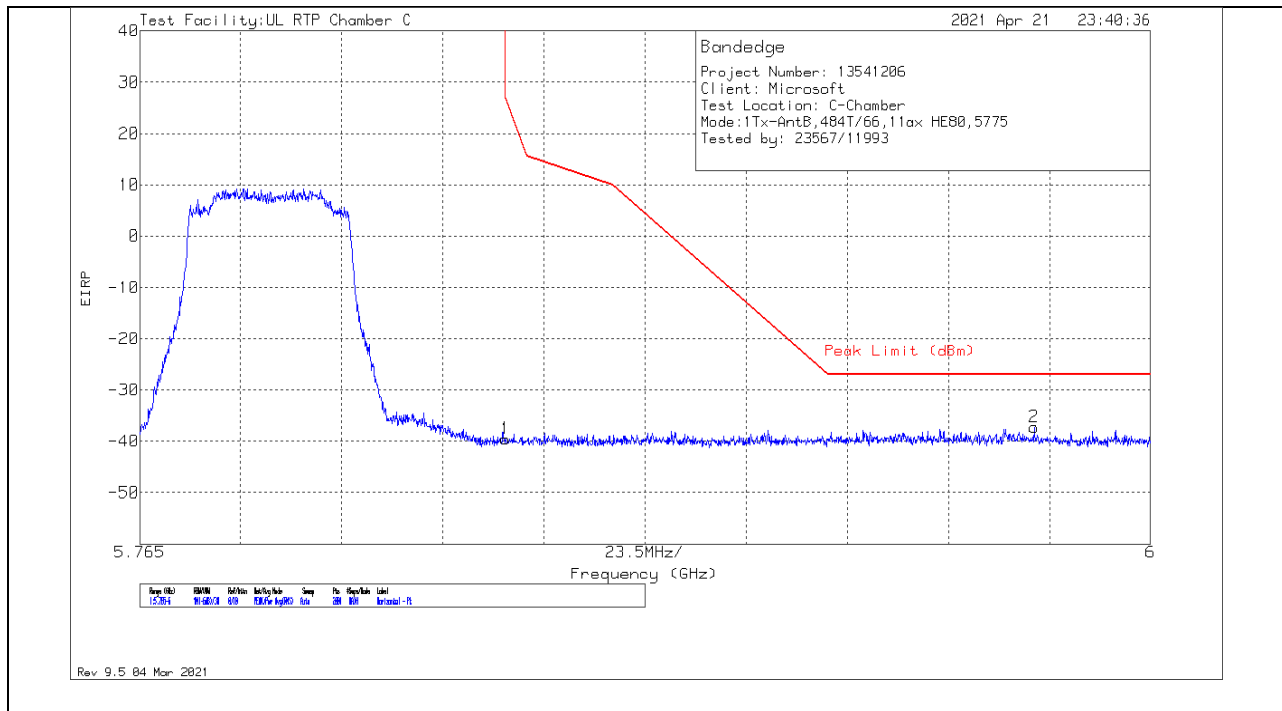

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-74.53	Pk	35.1	-11.9	11.8	-39.53	26.84	-66.37	241	175	H
2	5.97298	-72.61	Pk	35.4	-11.8	11.8	-37.21	-27	-10.21	241	175	H

Pk - Peak detector

VERTICAL RESULT

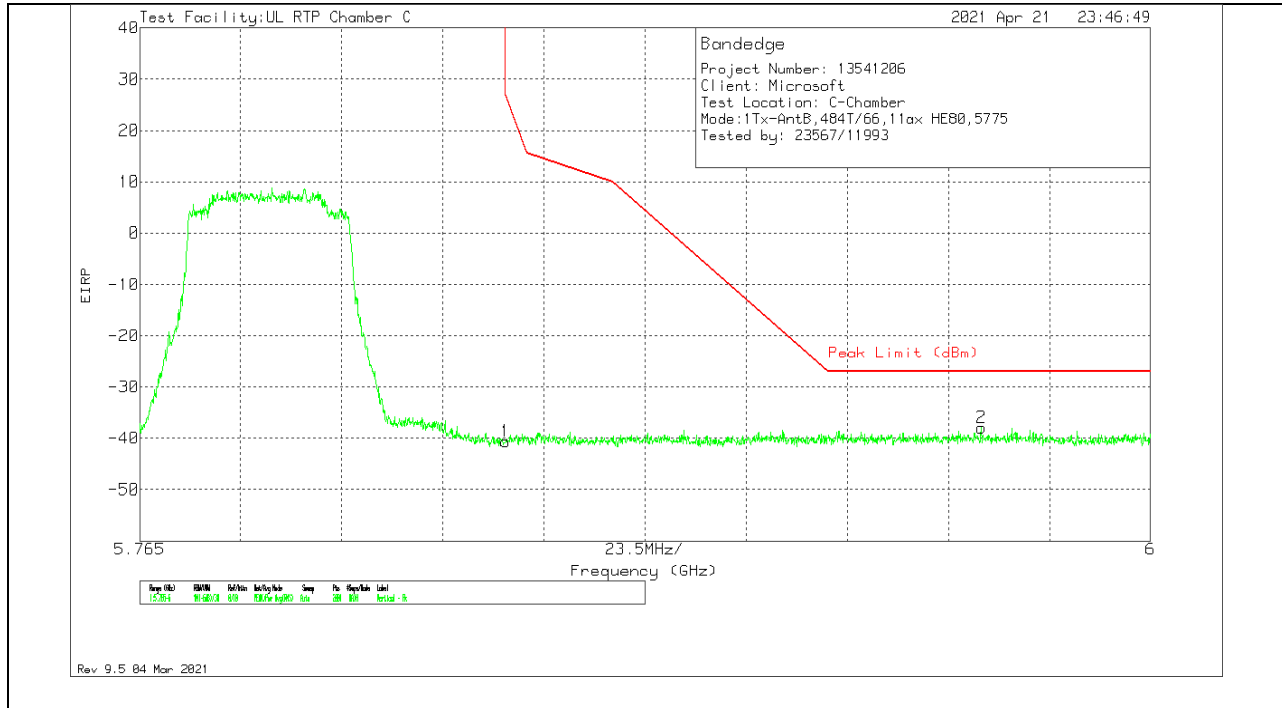

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85007	-75.63	Pk	35.1	-11.9	11.8	-40.63	26.84	-67.47	226	183	V
2	5.96064	-73.01	Pk	35.4	-12.1	11.8	-37.91	-27	-10.91	226	183	V


Pk - Peak detector

10.1.1. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.8GHZ BAND

2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

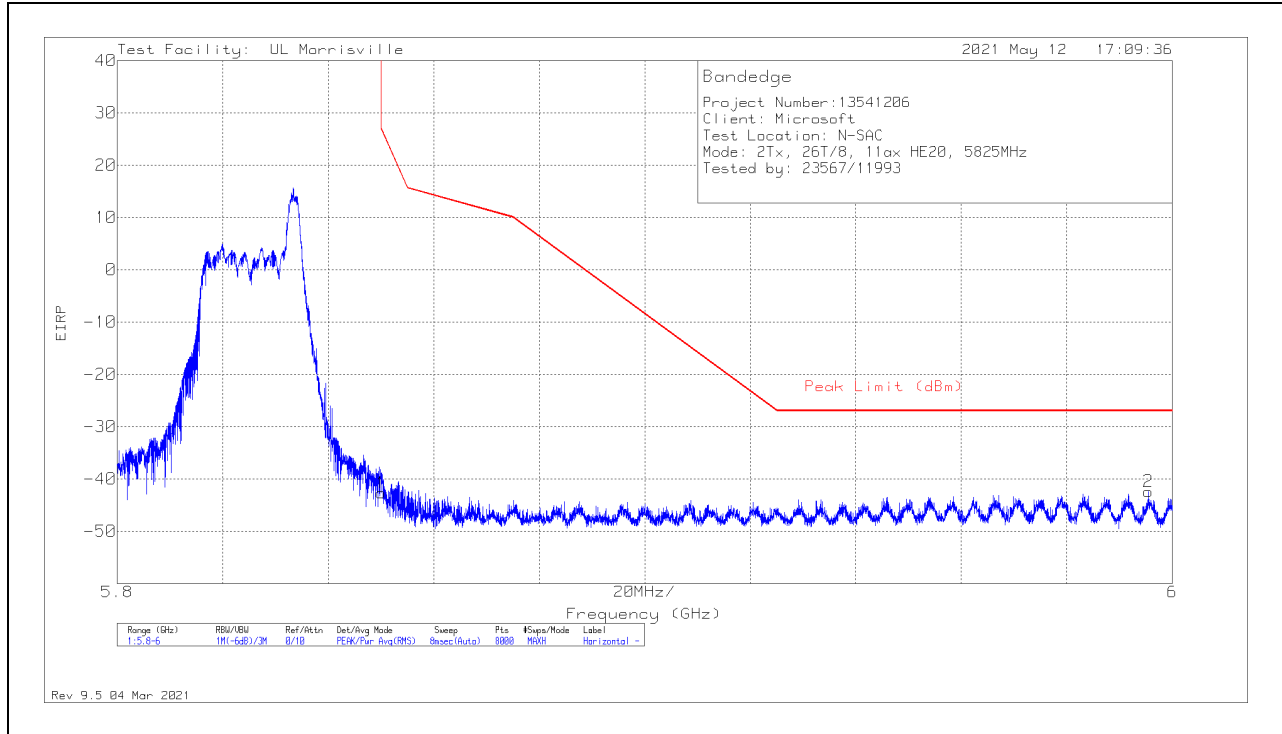

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-67.19	Pk	35.1	-22.4	11.8	-42.69	26.99	-69.68	252	126	H
2	5.99547	-67.41	Pk	35.2	-22	11.8	-42.41	-27	-15.41	252	126	H

Pk - Peak detector

VERTICAL RESULT

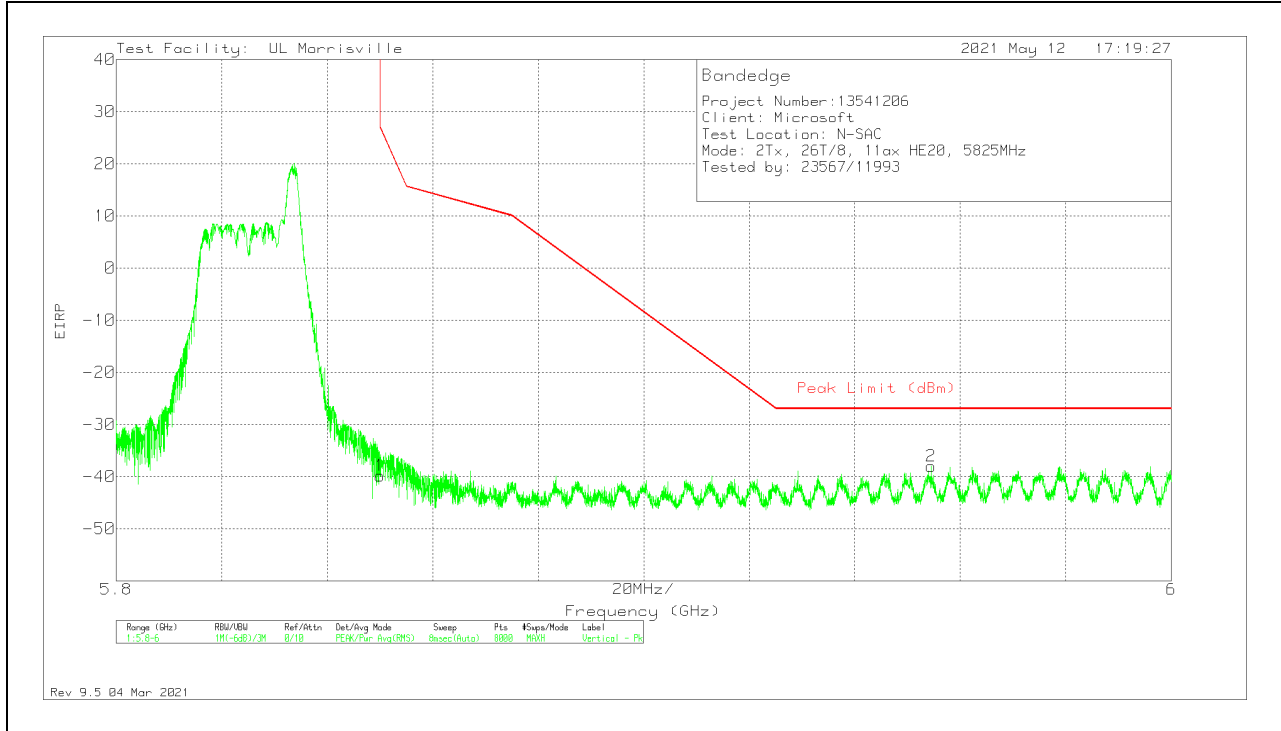


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-64.33	Pk	35.1	-22.4	11.8	-39.83	26.99	-66.82	330	243	V
2	5.95452	-63.11	Pk	35.3	-22	11.8	-38.01	-27	-11.01	330	243	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 40

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

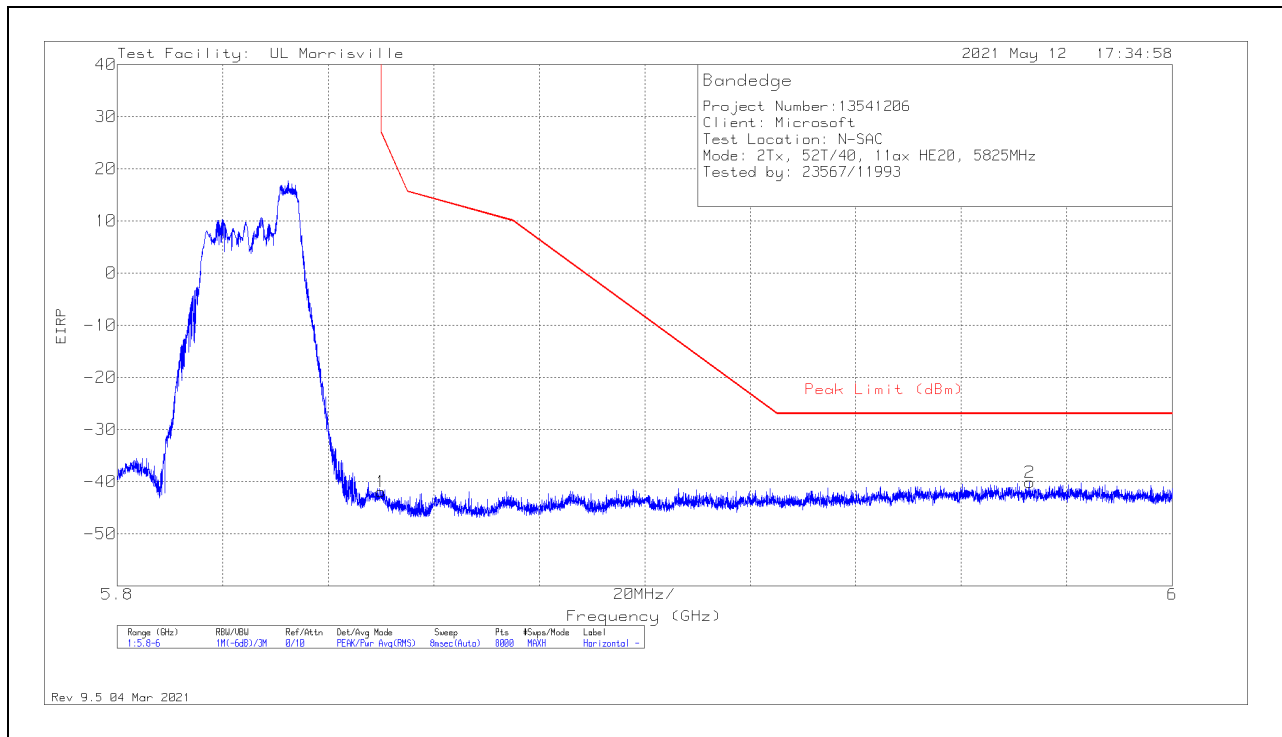

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-66.46	Pk	35.1	-22.4	11.8	-41.96	26.99	-68.95	337	341	H
2	5.973	-65.16	Pk	35.2	-22	11.8	-40.16	-27	-13.16	337	341	H

Pk - Peak detector

VERTICAL RESULT

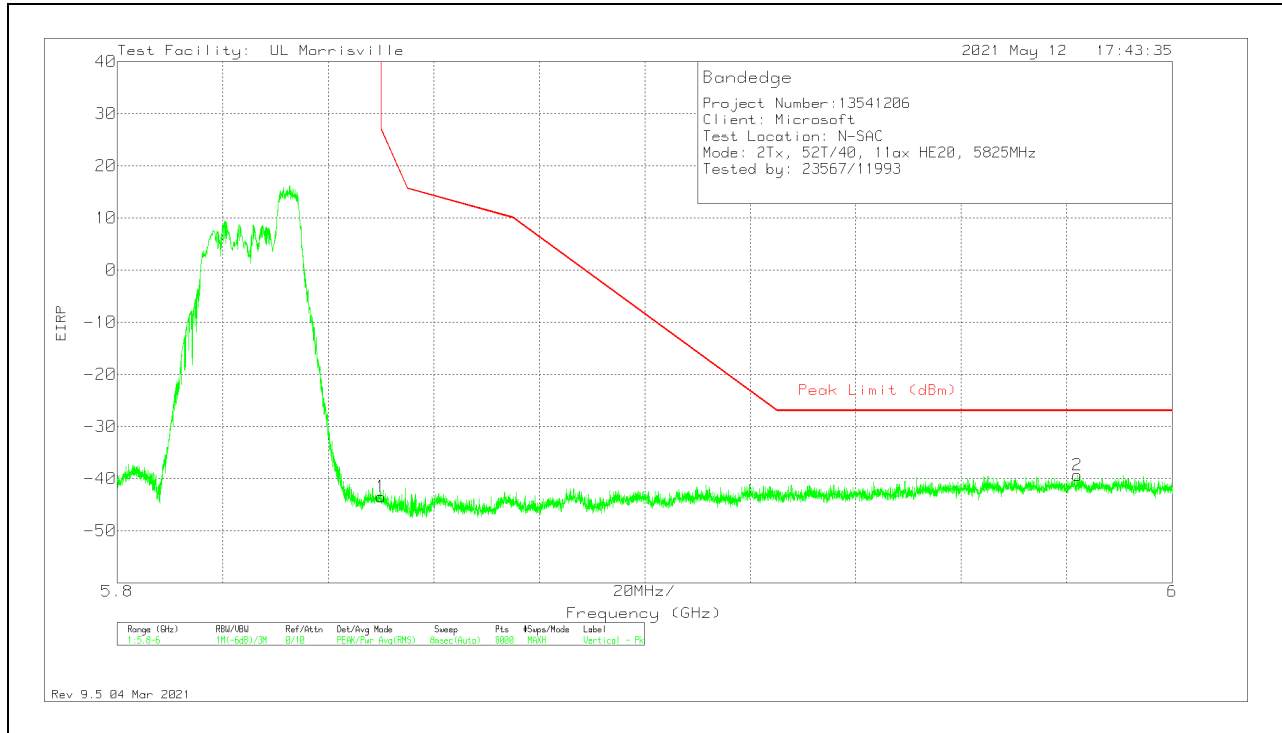


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-67.97	Pk	35.1	-22.4	11.8	-43.47	26.99	-70.46	348	168	V
2	5.98202	-64.35	Pk	35.2	-22	11.8	-39.35	-27	-12.35	348	168	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

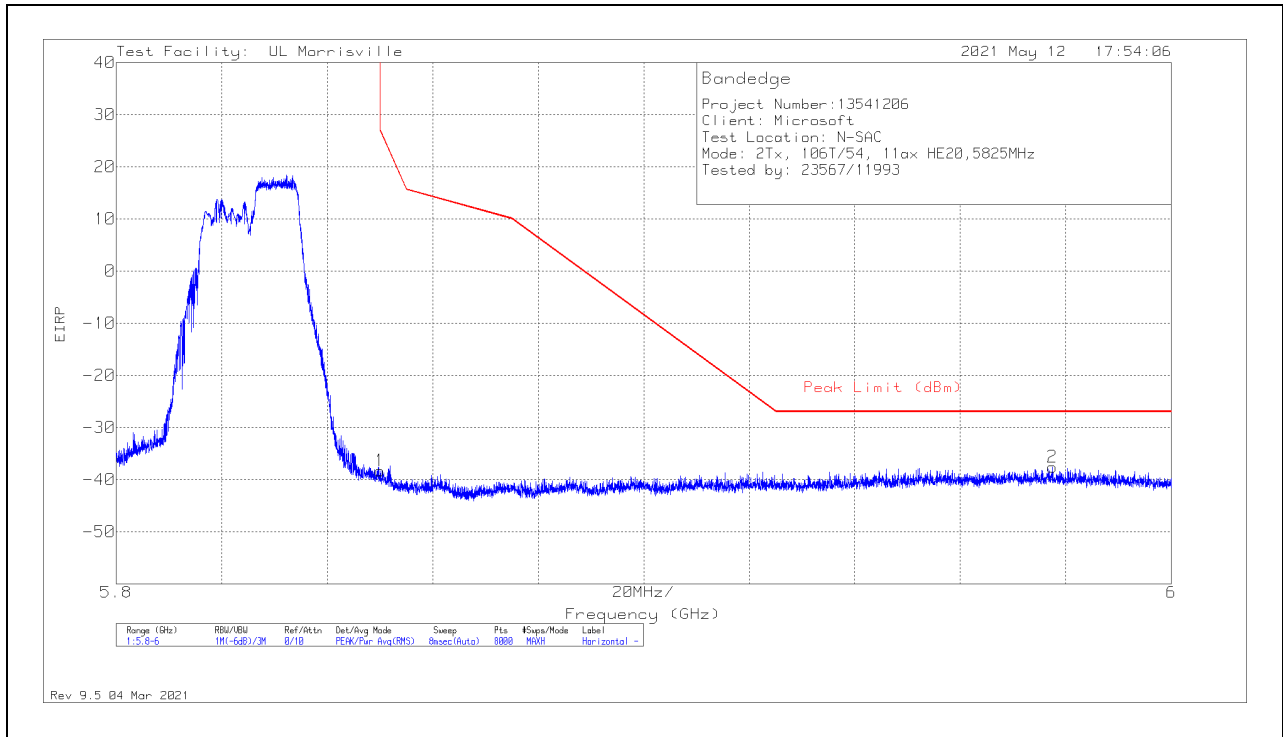

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-62.8	Pk	35.1	-22.4	11.8	-38.3	26.99	-65.29	320	338	H
2	5.9775	-62.57	Pk	35.2	-22	11.8	-37.57	-27	-10.57	320	338	H

Pk - Peak detector

VERTICAL RESULT

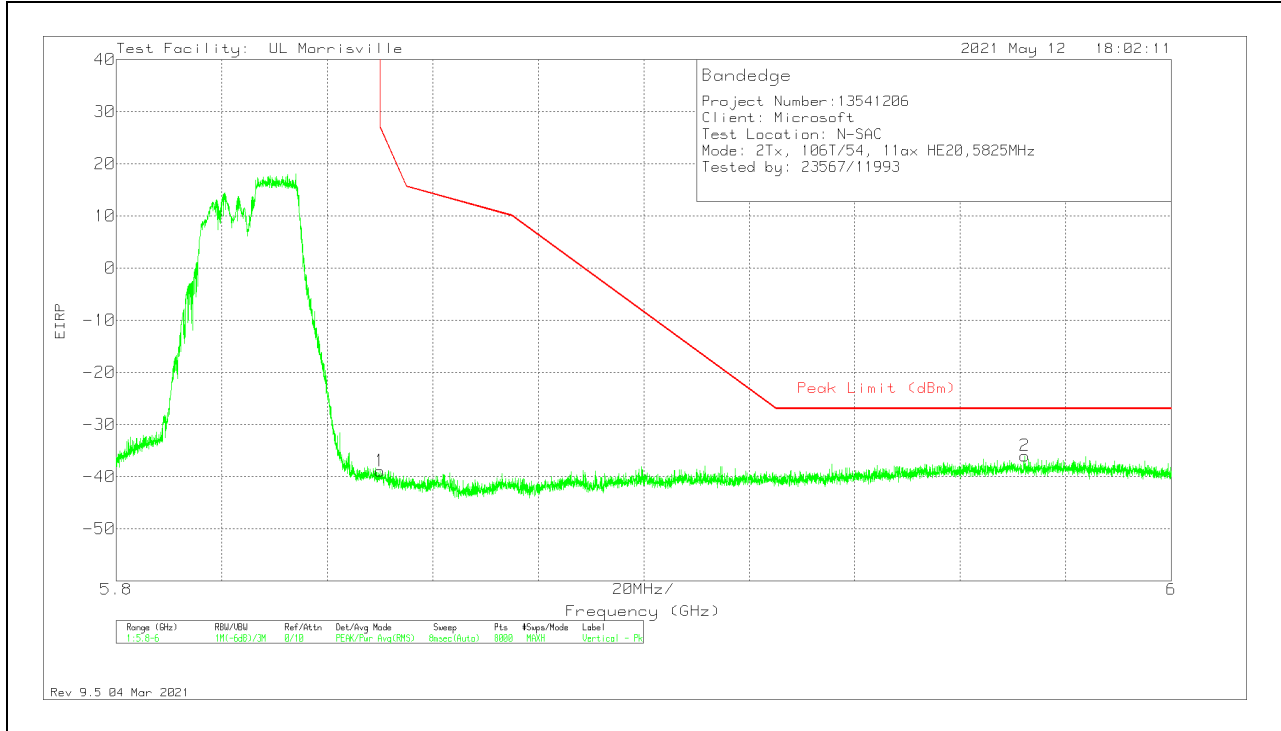


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-63.41	Pk	35.1	-22.4	11.8	-38.91	26.99	-65.9	323	175	V
2	5.97222	-60.99	Pk	35.2	-22	11.8	-35.99	-27	-8.99	323	175	V

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: SU, Single User

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

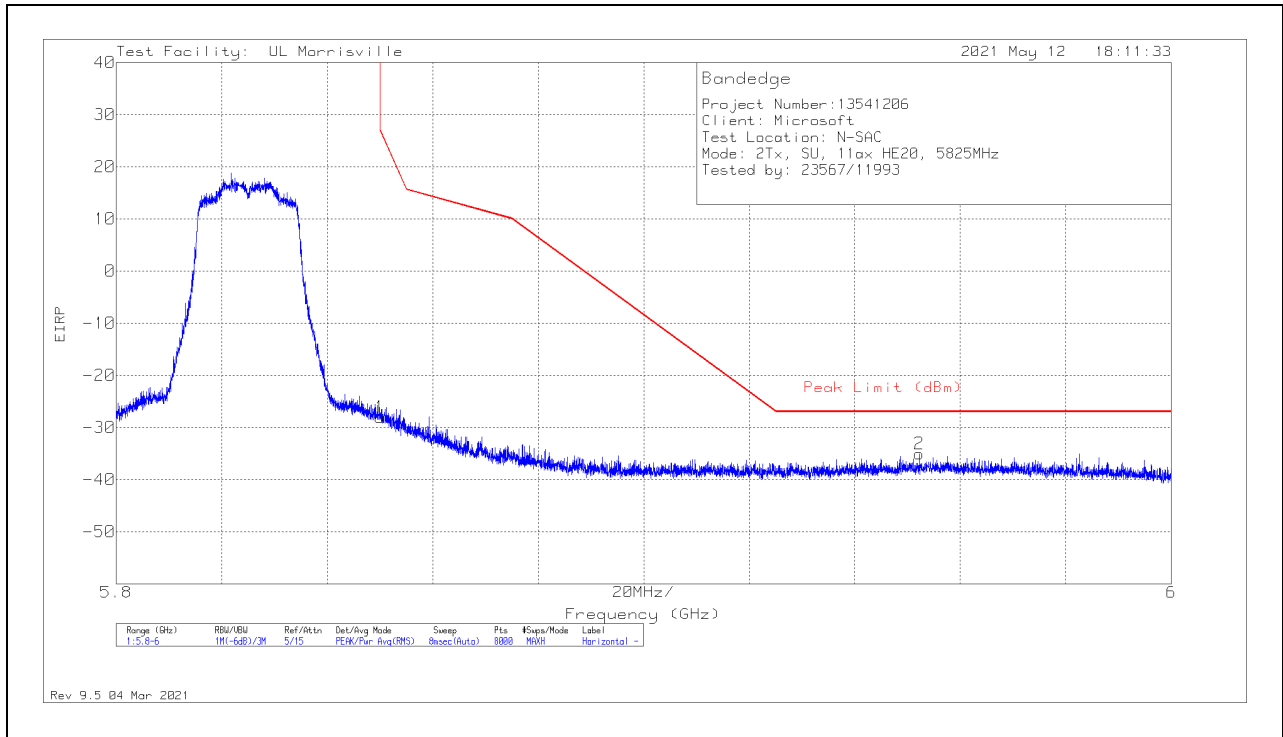

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-52.52	Pk	35.1	-22.4	11.8	-28.02	26.99	-55.01	316	263	H
2	5.95222	-60.14	Pk	35.3	-22	11.8	-35.04	-27	-8.04	316	263	H

Pk - Peak detector

VERTICAL RESULT

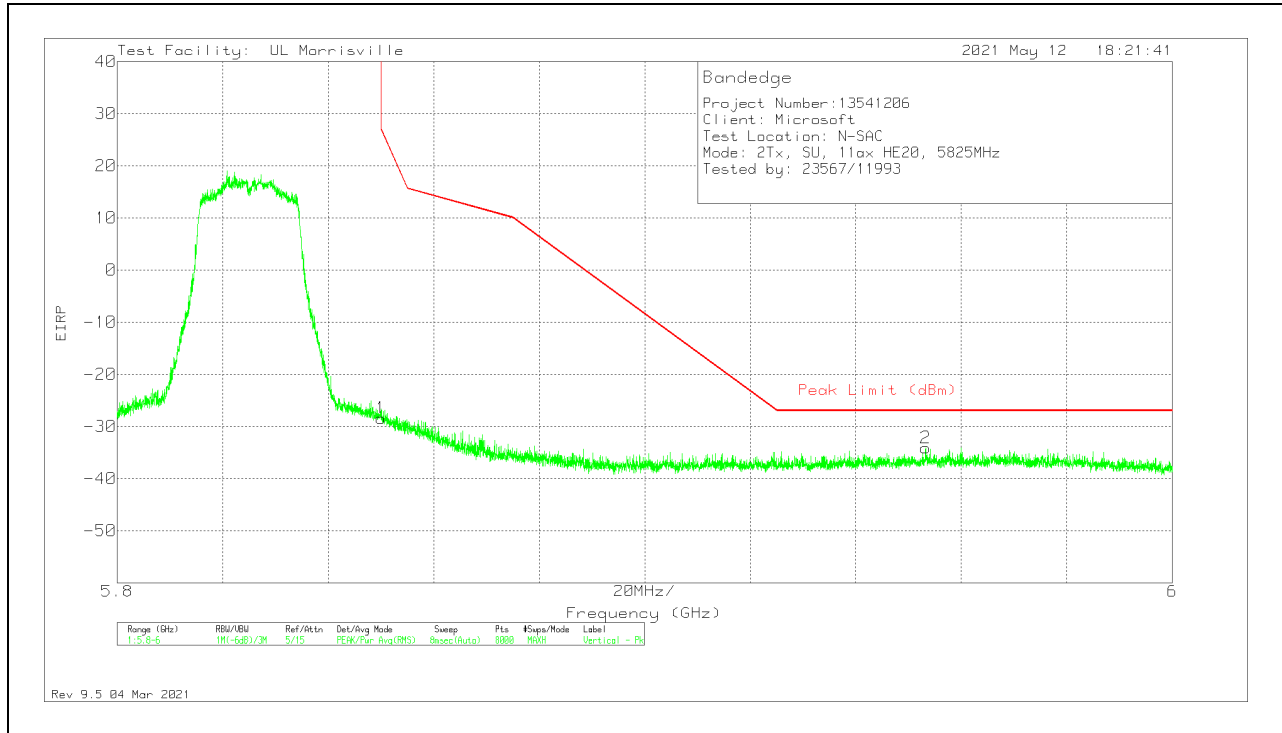


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-52.89	Pk	35.1	-22.4	11.8	-28.39	26.99	-55.38	314	185	V
2	5.95324	-59.21	Pk	35.3	-22	11.8	-34.11	-27	-7.11	314	185	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

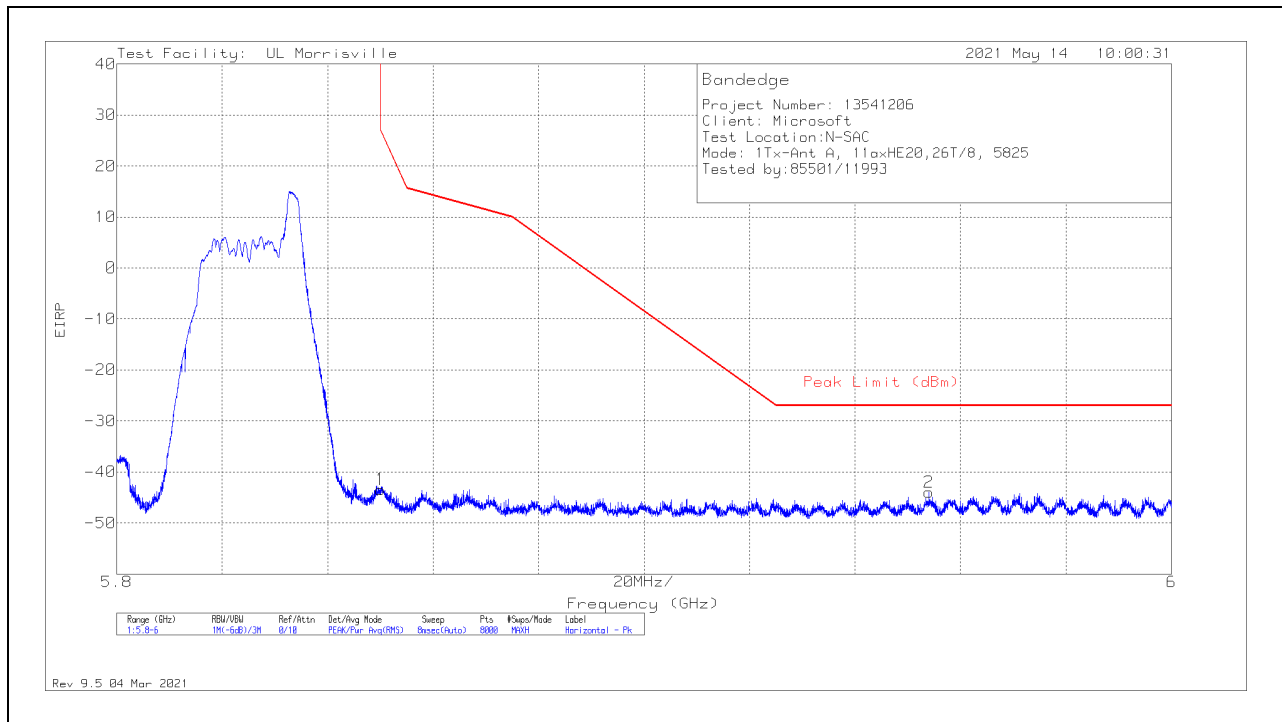

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-67.92	Pk	35.1	-22.4	11.8	-43.42	26.99	-70.41	148	195	H
2	5.95399	-69.04	Pk	35.3	-22	11.8	-43.94	-27	-16.94	148	195	H

Pk - Peak detector

VERTICAL RESULT

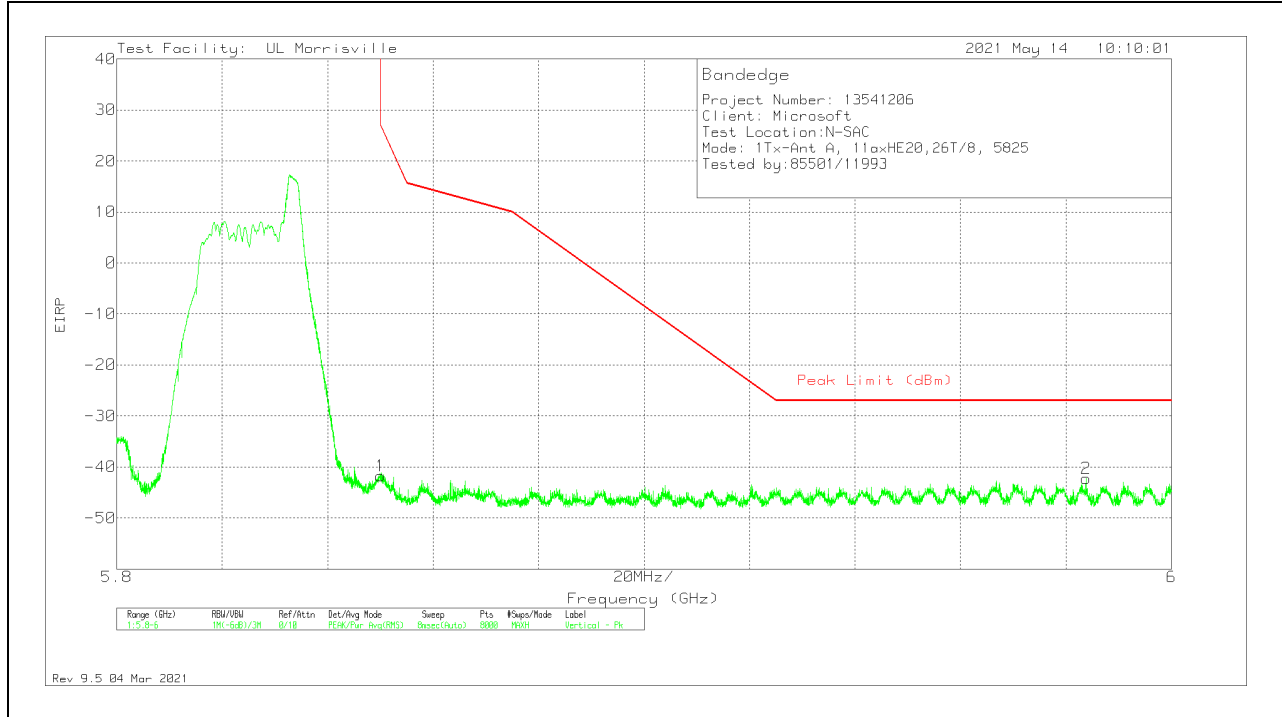


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-66.22	Pk	35.1	-22.4	11.8	-41.72	26.99	-68.71	147	243	V
2	5.9838	-67.16	Pk	35.2	-22.1	11.8	-42.26	-27	-15.26	147	243	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: 52-Tones, RU Index 40

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

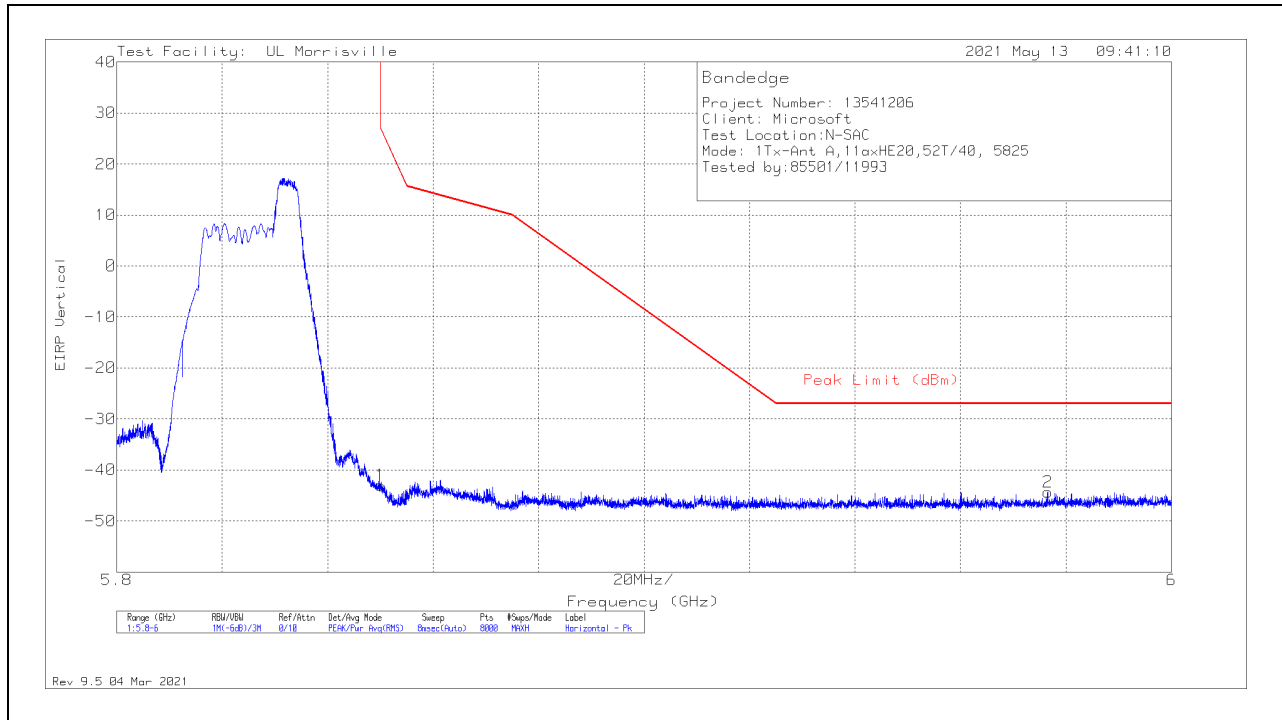

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-67.54	PK	35.1	-22.4	11.8	-43.04	26.99	-70.03	148	151	H
2	5.97655	-69.32	PK	35.2	-22	11.8	-44.32	-27	-17.32	148	151	H

Pk - Peak detector

VERTICAL RESULT

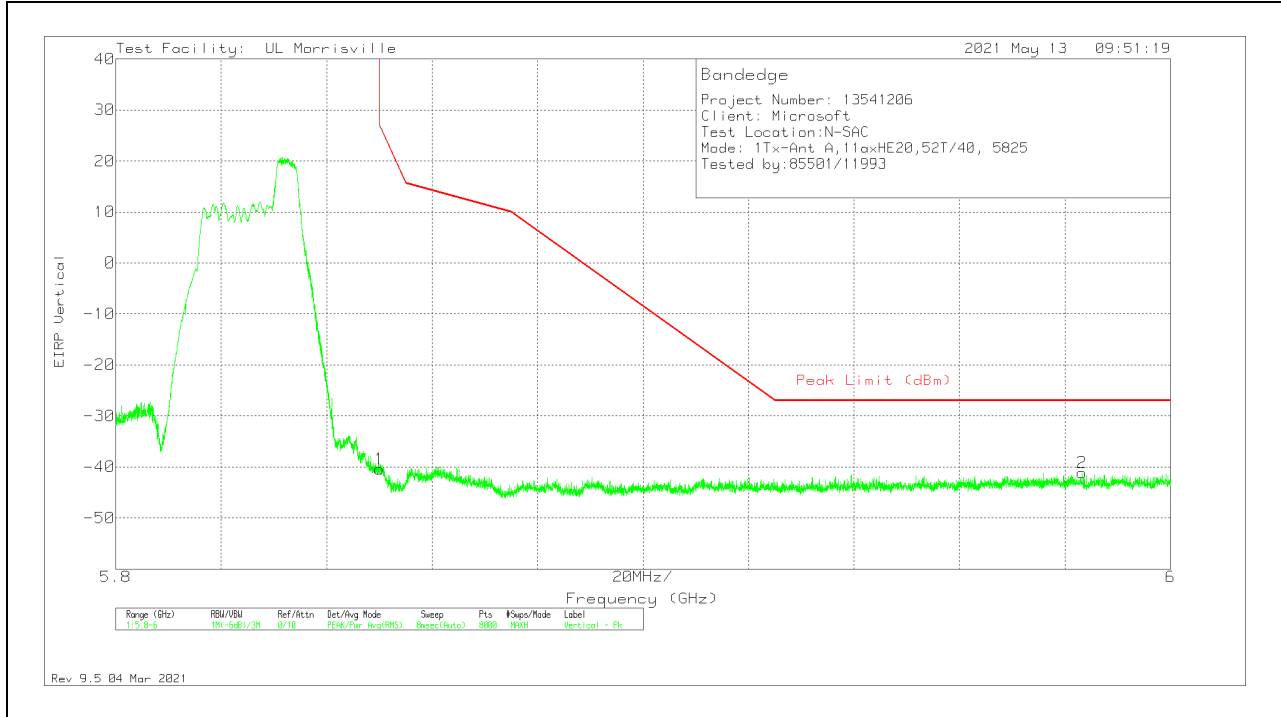


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-64.91	Pk	35.1	-22.4	11.8	-40.41	26.99	-67.4	153	149	V
2	5.98322	-65.99	Pk	35.2	-22.1	11.8	-41.09	-27	-14.09	153	149	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

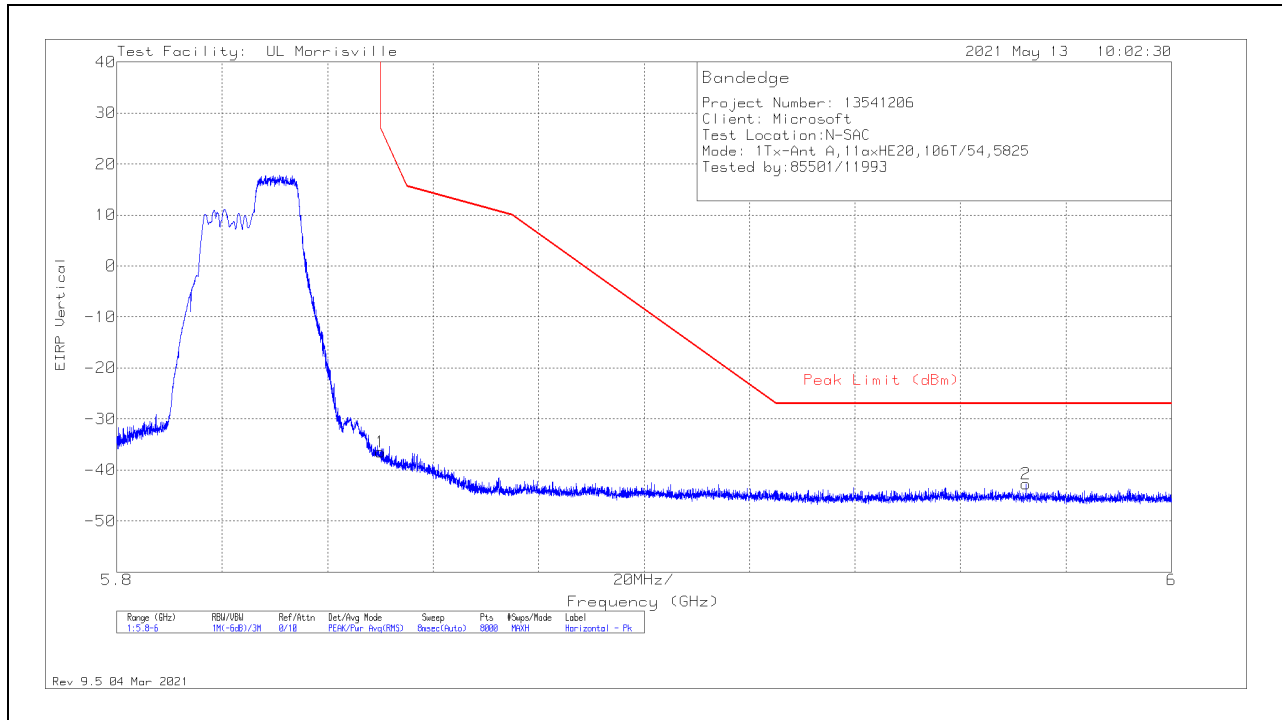

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-60.97	PK	35.1	-22.4	11.8	-36.47	26.99	-63.46	149	121	H
2	5.9724	-67.75	PK	35.2	-22	11.8	-42.75	-27	-15.75	149	121	H

Pk - Peak detector

VERTICAL RESULT

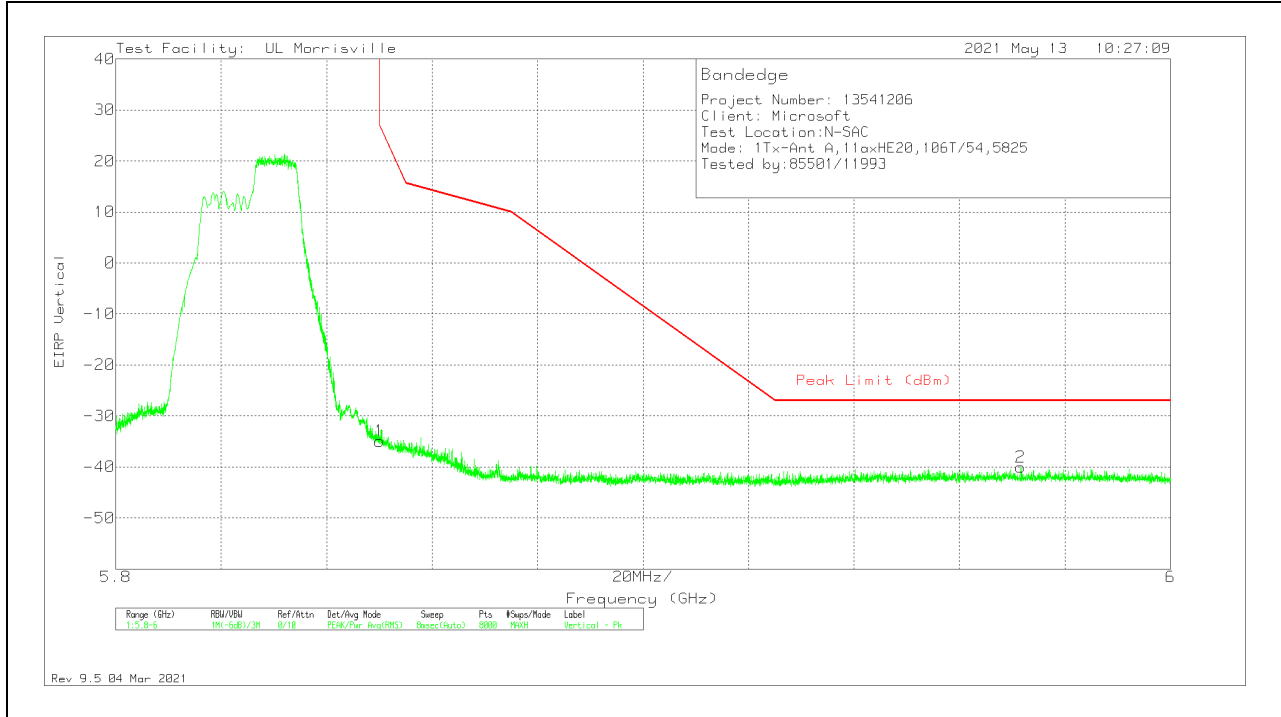


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-59.44	Pk	35.1	-22.4	11.8	-34.94	26.99	-61.93	142	159	V
2	5.97165	-65.01	Pk	35.2	-22	11.8	-40.01	-27	-13.01	142	159	V

Pk - Peak detector

1TX Antenna A OFDMA MODE: SU, Single User

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

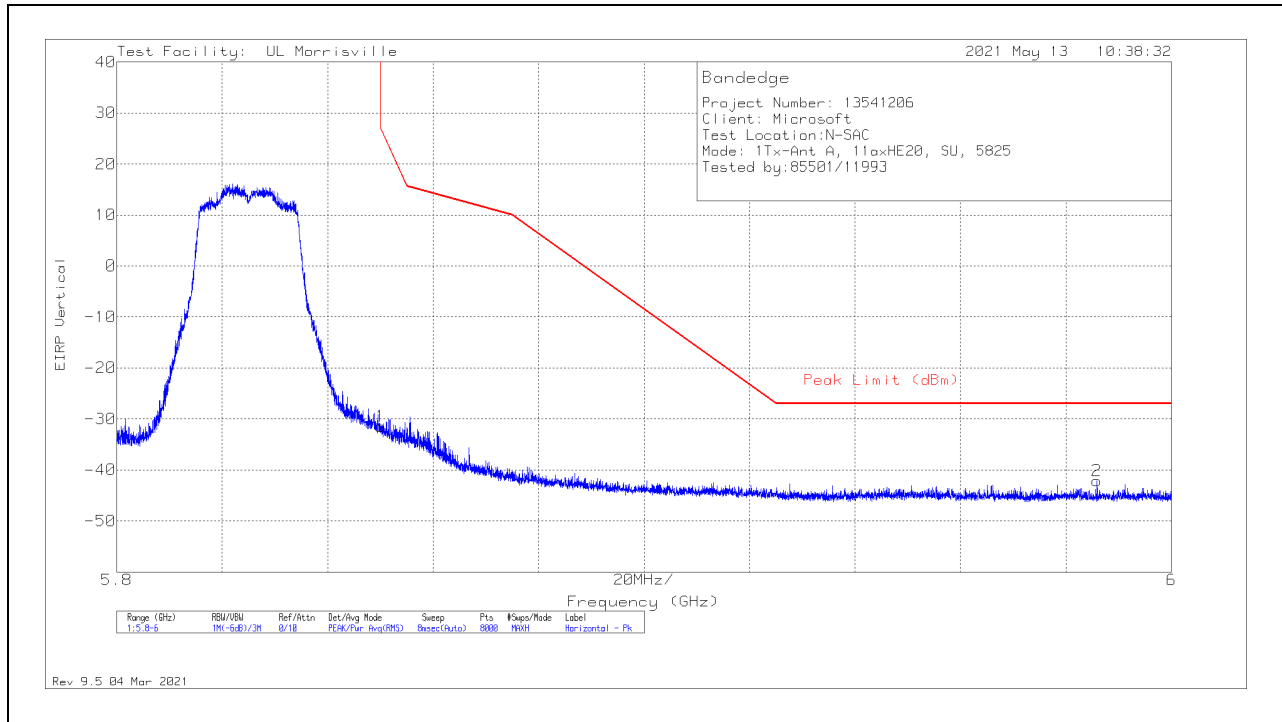

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-55.98	PK	35.1	-22.4	11.8	-31.48	26.99	-58.47	144	167	H
2	5.98587	-67.02	PK	35.2	-22.1	11.8	-42.12	-27	-15.12	144	167	H

Pk - Peak detector

VERTICAL RESULT

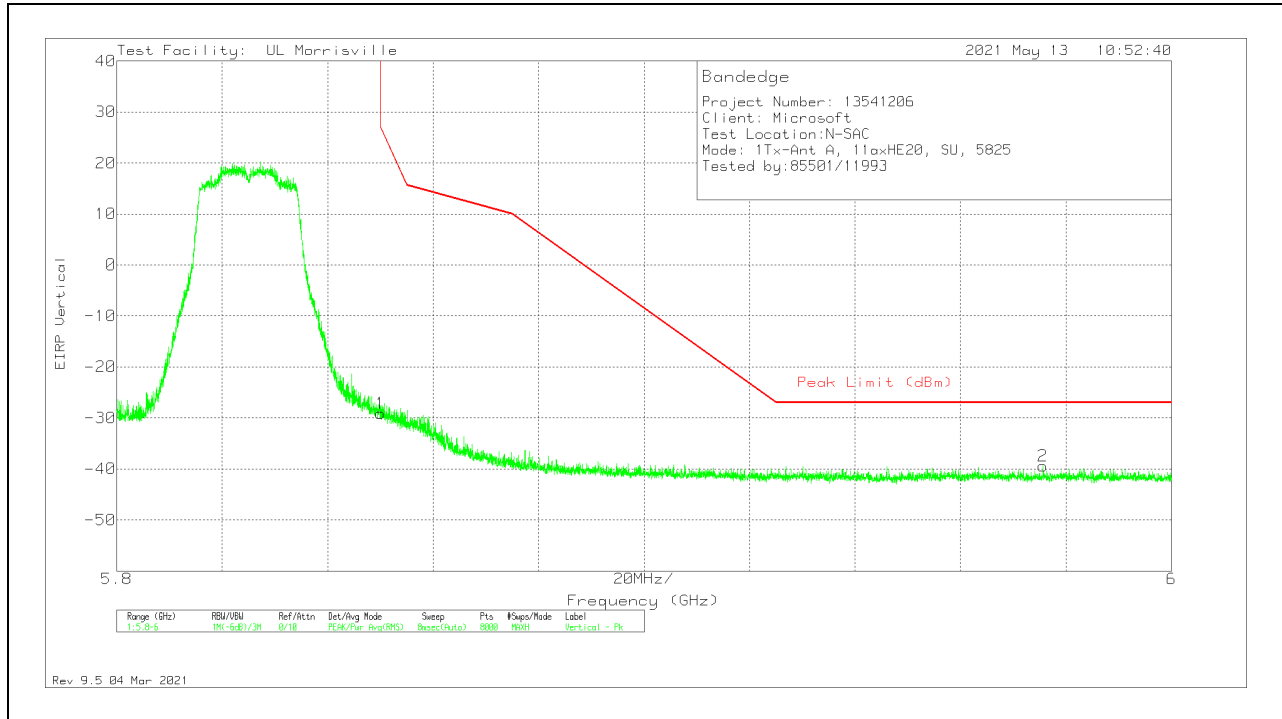


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-53.58	Pk	35.1	-22.4	11.8	-29.08	26.99	-56.07	149	188	V
2	5.97567	-64.42	Pk	35.2	-22	11.8	-39.42	-27	-12.42	149	188	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

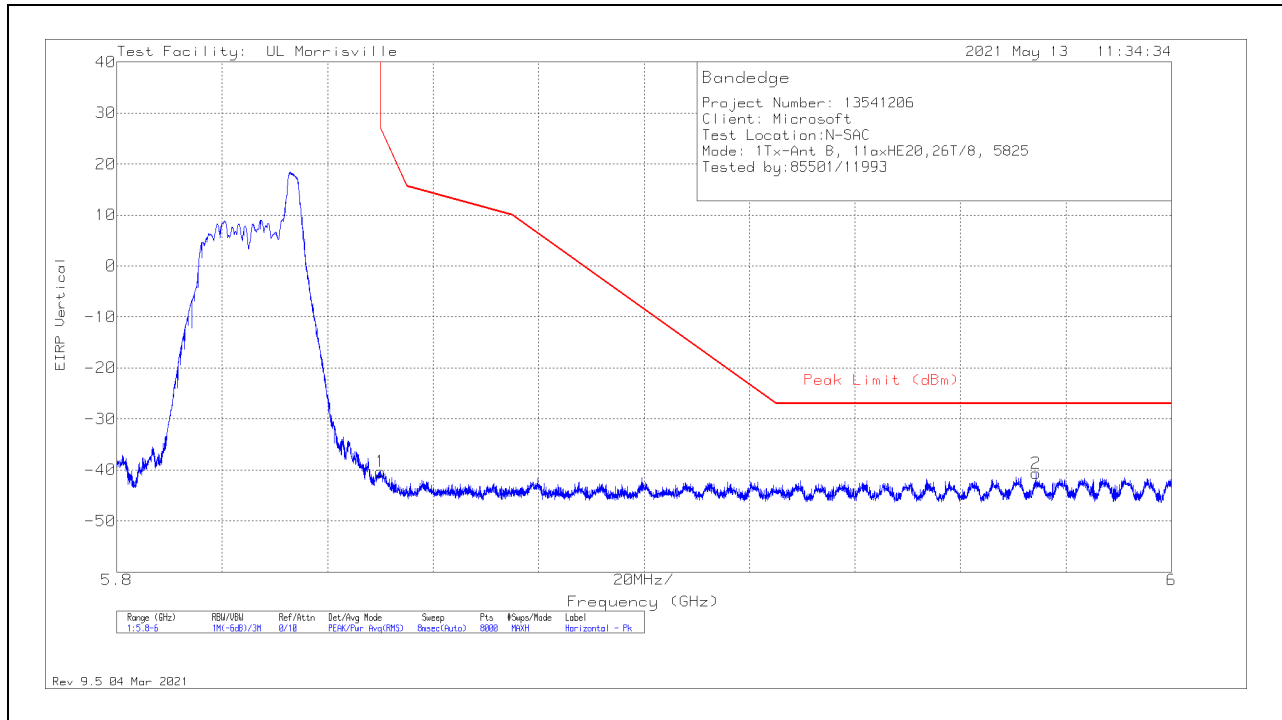

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-64.8	PK	35.1	-22.4	11.8	-40.3	26.99	-67.29	66	174	H
2	5.97432	-65.65	PK	35.2	-22	11.8	-40.65	-27	-13.65	66	174	H

Pk - Peak detector

VERTICAL RESULT

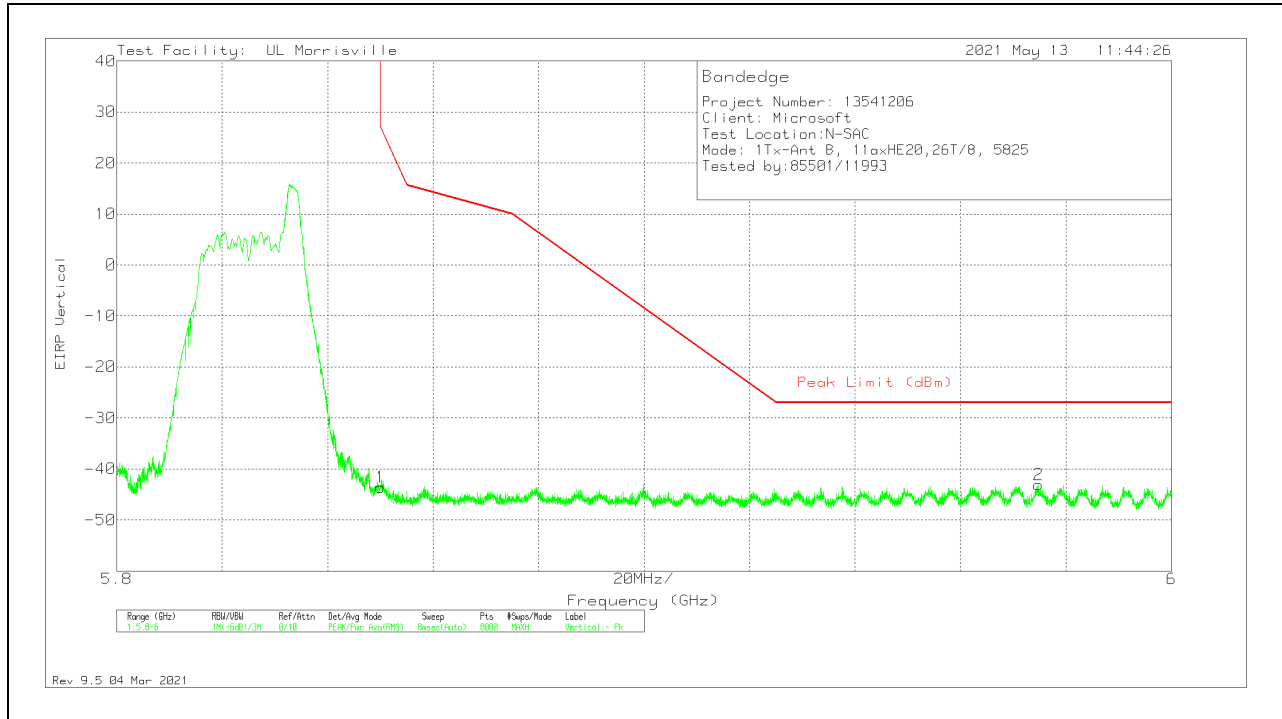


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-68.1	Pk	35.1	-22.4	11.8	-43.6	26.99	-70.59	148	146	V
2	5.97477	-68.1	Pk	35.2	-22	11.8	-43.1	-27	-16.1	148	146	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 40

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

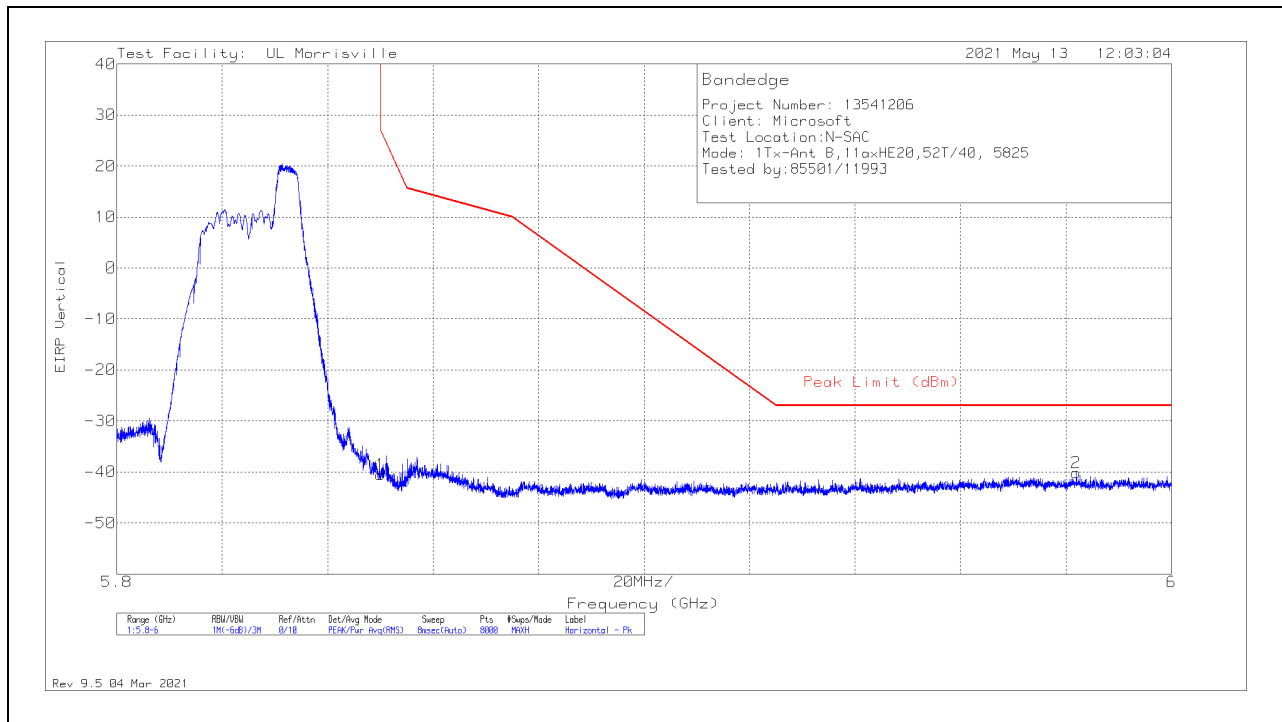

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-65.03	PK	35.1	-22.4	11.8	-40.53	26.99	-67.52	134	146	H
2	5.9819	-65.2	PK	35.2	-22	11.8	-40.2	-27	-13.2	134	146	H

Pk - Peak detector

VERTICAL RESULT

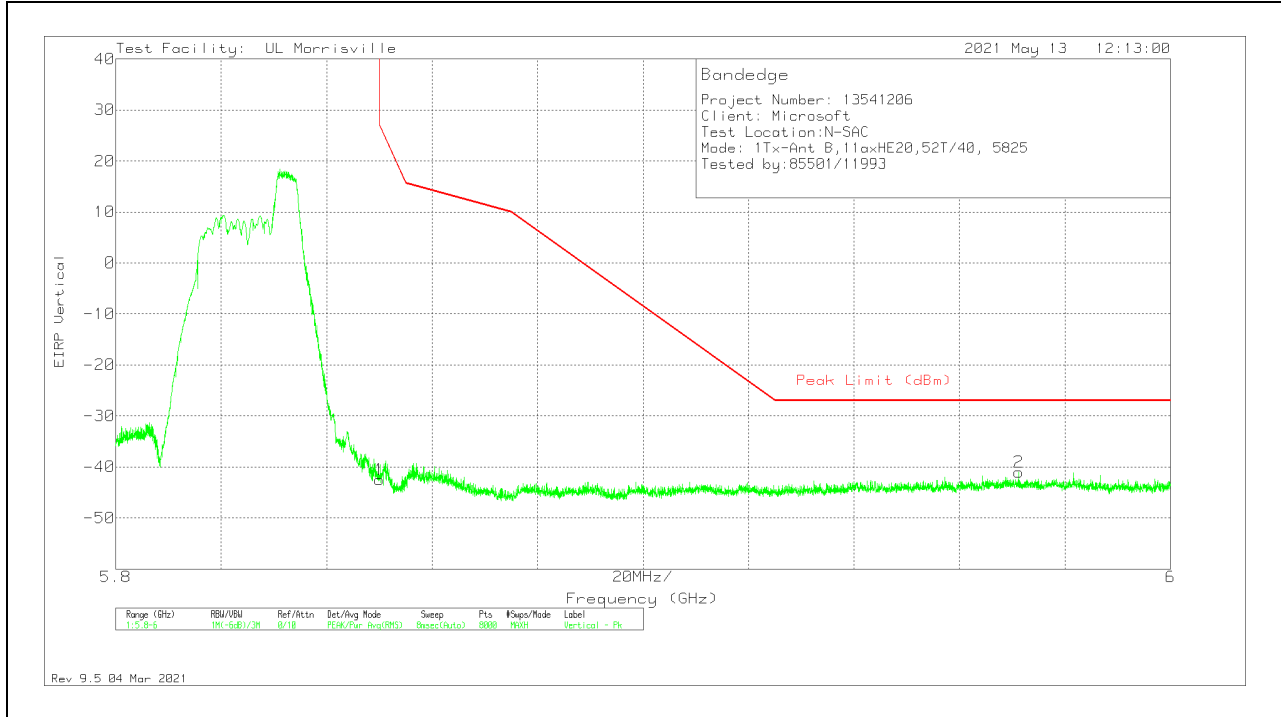


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-67	Pk	35.1	-22.4	11.8	-42.5	26.99	-69.49	165	151	V
2	5.9712	-65.97	Pk	35.2	-22	11.8	-40.97	-27	-13.97	165	151	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

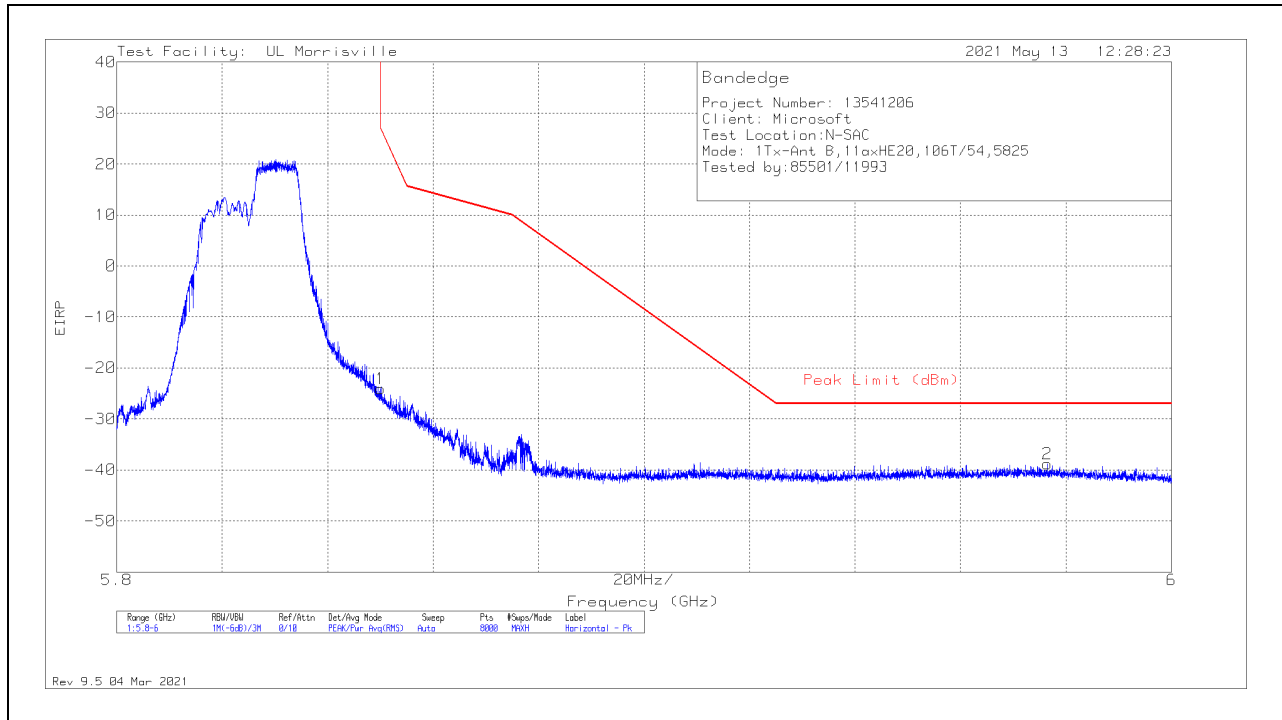

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-48.6	PK	35.1	-22.4	11.8	-24.1	26.99	-51.09	180	160	H
2	5.97645	-63.84	PK	35.2	-22	11.8	-38.84	-27	-11.84	180	160	H

Pk - Peak detector

VERTICAL RESULT

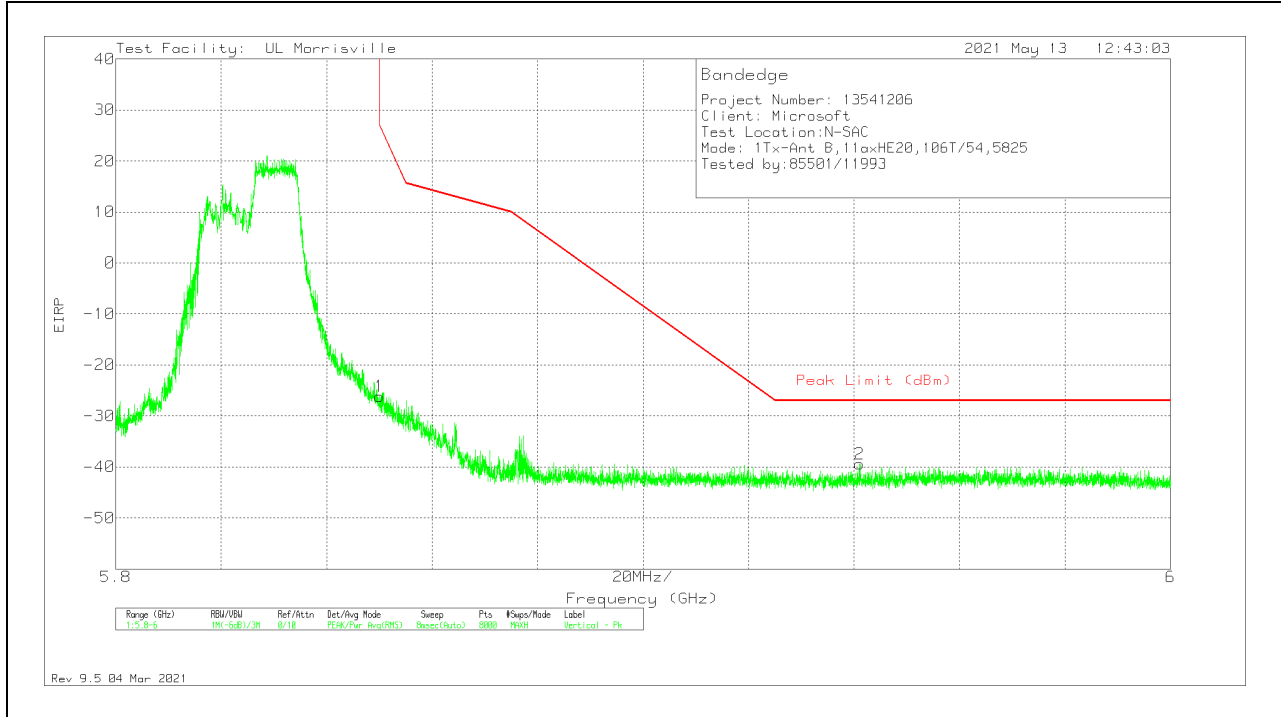


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-50.64	Pk	35.1	-22.4	11.8	-26.14	26.99	-53.13	143	179	V
2	5.94109	-64.42	Pk	35.2	-22	11.8	-39.42	-27	-12.42	143	179	V

Pk - Peak detector

1TX Antenna B OFDMA MODE: SU, Single User

BANDEDGE (CHANNEL 165 HIGH EDGE)


HORIZONTAL RESULT

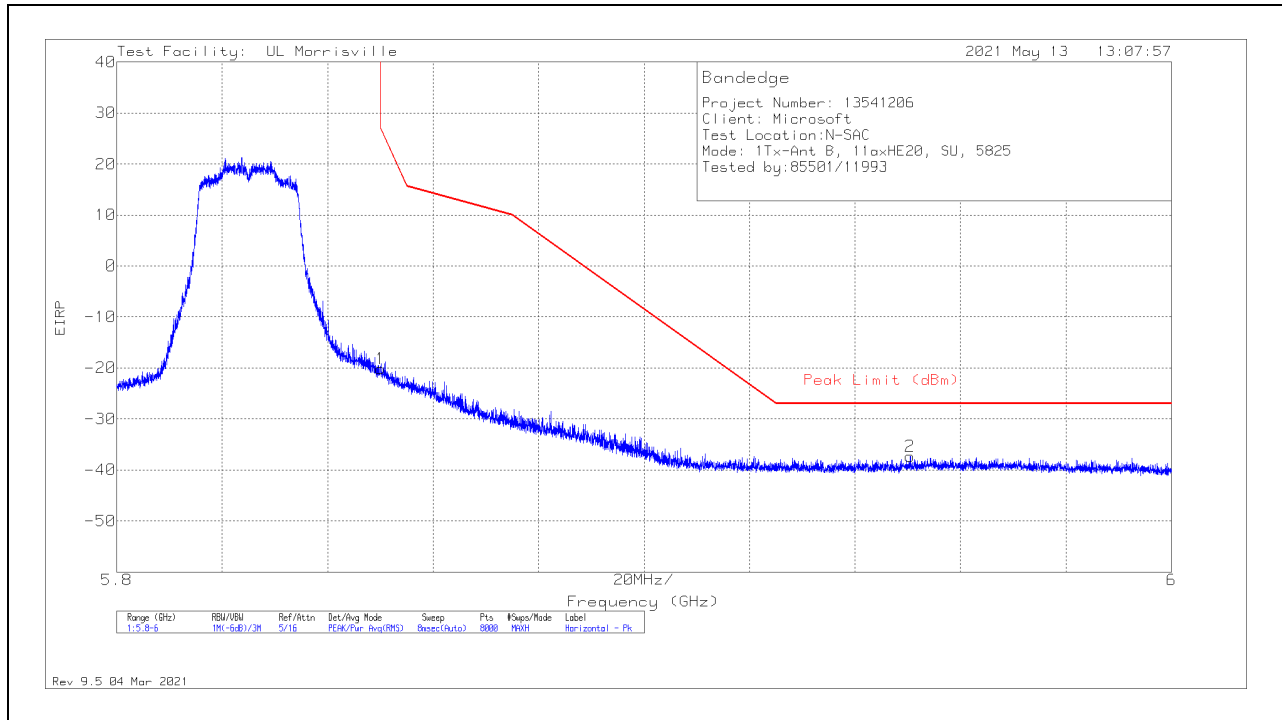

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-44.6	PK	35.1	-22.4	11.8	-20.1	26.99	-47.09	71	180	H
2	5.95049	-62.44	PK	35.3	-22	11.8	-37.34	-27	-10.34	71	180	H

Pk - Peak detector

VERTICAL RESULT

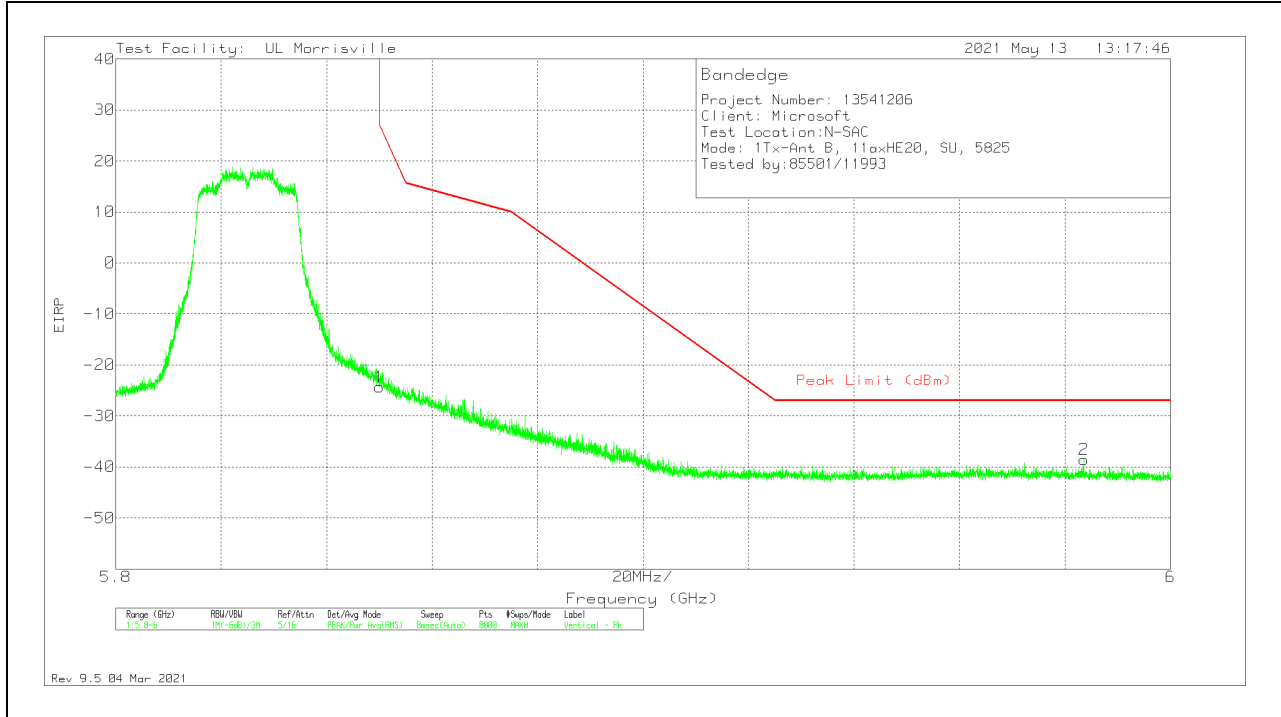

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-48.82	Pk	35.1	-22.4	11.8	-24.32	26.99	-51.31	163	184	V
2	5.98355	-63.46	Pk	35.2	-22.1	11.8	-38.56	-27	-11.56	163	184	V

Pk - Peak detector

11. SETUP PHOTOS

Please refer to R13541206-EP2 for setup photos.

END OF TEST REPORT