


2TX Antenna A + Antenna B SDM MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

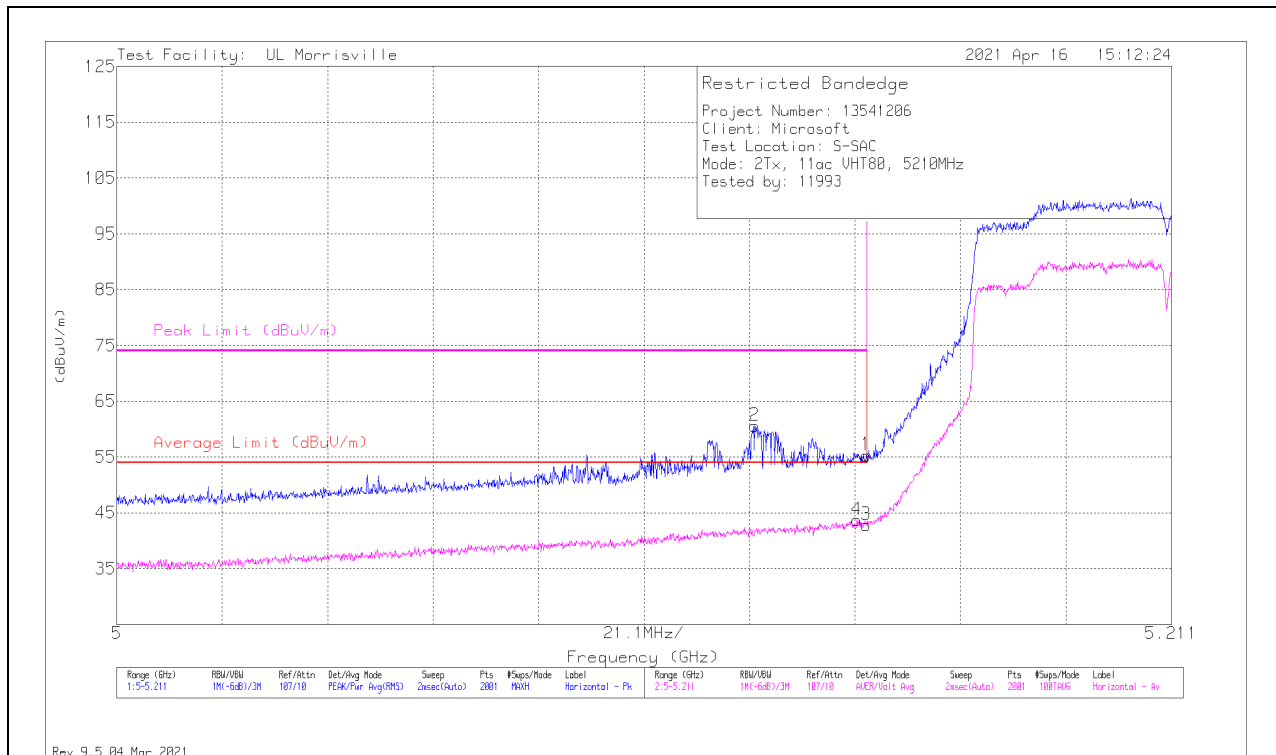

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.14992	43.52	Pk	34.2	-22.4	0	55.32	-	-	74	-18.68	31	159	H
2	** * 5.12766	48.95	Pk	34.1	-22.5	0	60.55	-	-	74	-13.45	31	159	H
3	* ** 5.14992	30.87	ADV	34.2	-22.4	.19	42.86	54	-11.14	-	-	31	159	H
4	* ** 5.14802	31.72	ADV	34.2	-22.4	.19	43.71	54	-10.29	-	-	31	159	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

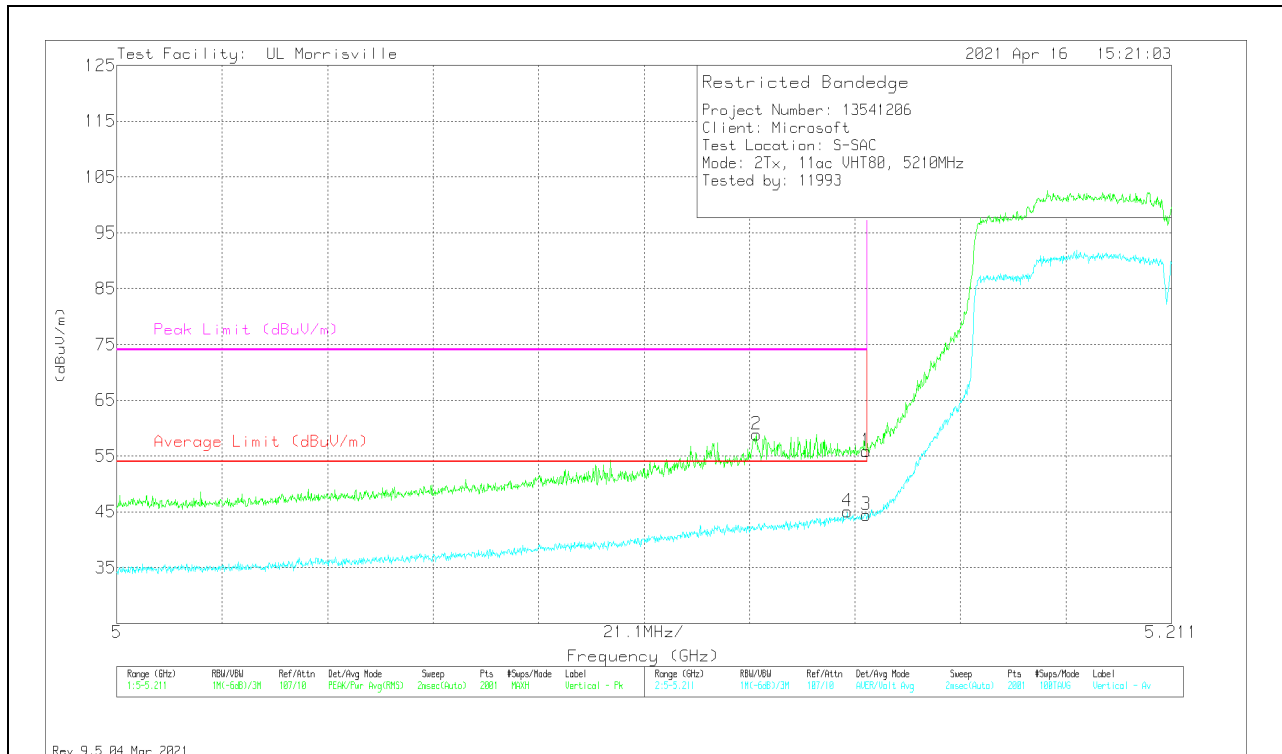

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.14992	44.06	Pk	34.2	-22.4	0	55.86	-	-	74	-18.14	45	170	V
2	** * 5.12797	47.22	Pk	34.1	-22.5	0	58.82	-	-	74	-15.18	45	170	V
3	* ** 5.14992	32.44	ADV	34.2	-22.4	.19	44.43	54	-9.57	-	-	45	169	V
4	* ** 5.14612	33.14	ADV	34.1	-22.4	.19	45.03	54	-8.97	-	-	45	169	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

10.1.5. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND

2TX Antenna A + Antenna B CDD MODE

BANDEDGE (HIGH CHANNEL 64)


HORIZONTAL RESULT

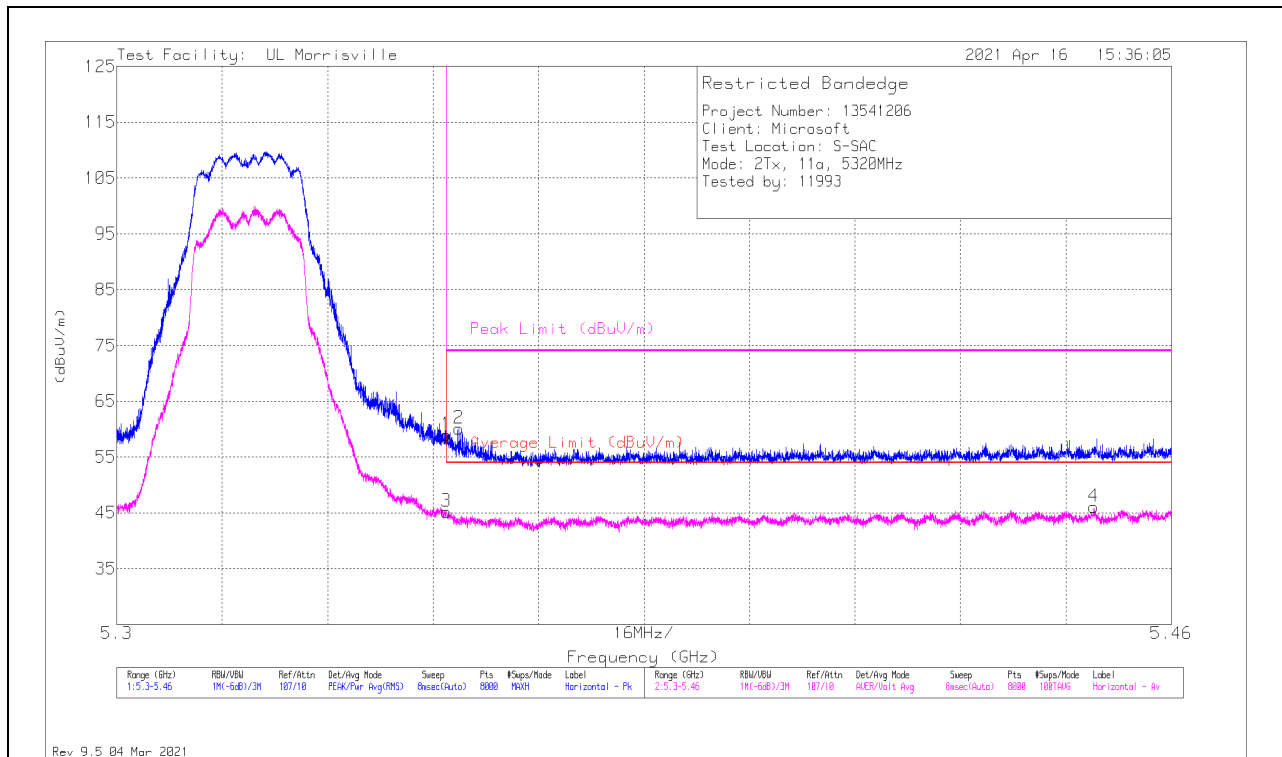

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	47.7	Pk	34.5	-23.2	0	59	-	-	74	-15	105	120	H
2	* ** 5.35191	48.81	Pk	34.5	-23.2	0	60.11	-	-	74	-13.89	105	120	H
3	* ** 5.35001	33.75	ADV	34.5	-23.2	.19	45.24	54	-8.76	-	-	105	120	H
4	* ** 5.44818	34.75	ADV	34.5	-23.4	.19	46.04	54	-7.96	-	-	105	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

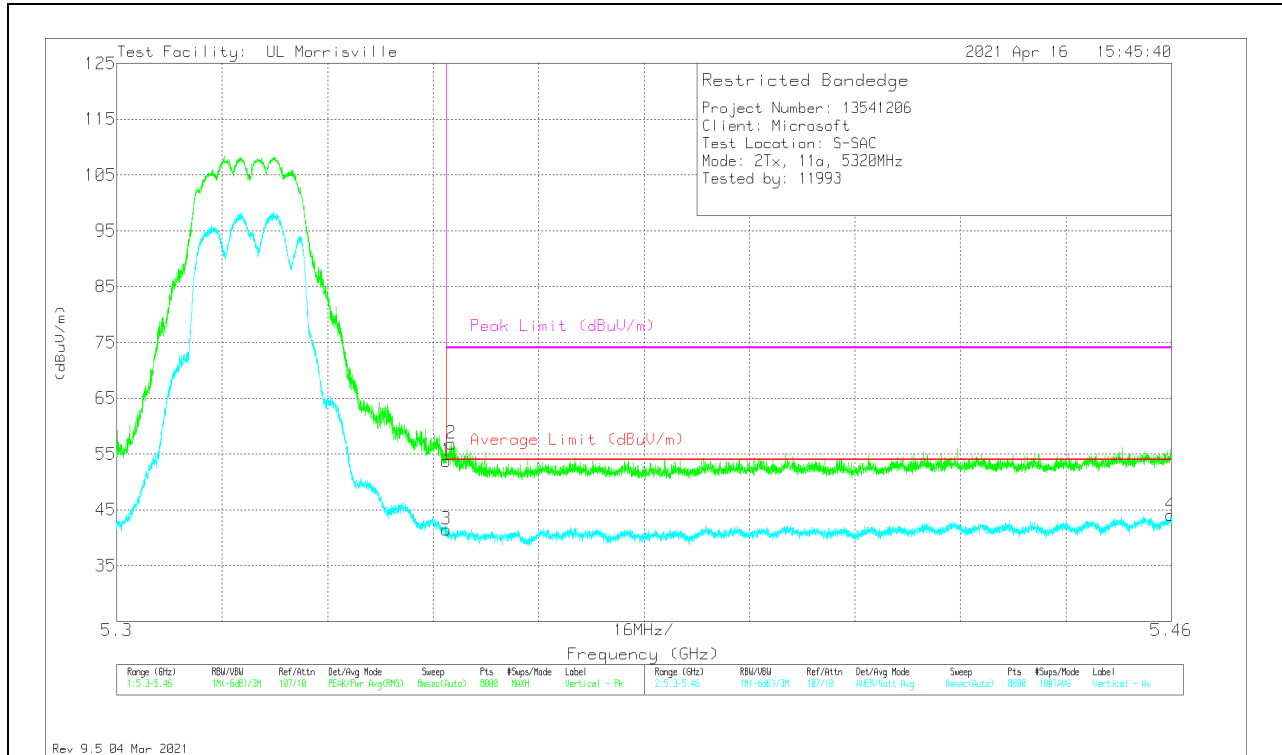


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	42.45	Pk	34.5	-23.2	0	53.75	-	-	74	-20.25	18	289	V
2	*** 5.35075	45.59	Pk	34.5	-23.2	0	56.89	-	-	74	-17.11	18	289	V
3	*** 5.35001	30.03	ADV	34.5	-23.2	.19	41.52	54	-12.48	-	-	18	289	V
4	*** 5.4599	32.87	ADV	34.5	-23.5	.19	44.06	54	-9.94	-	-	18	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 60)

HORIZONTAL RESULT

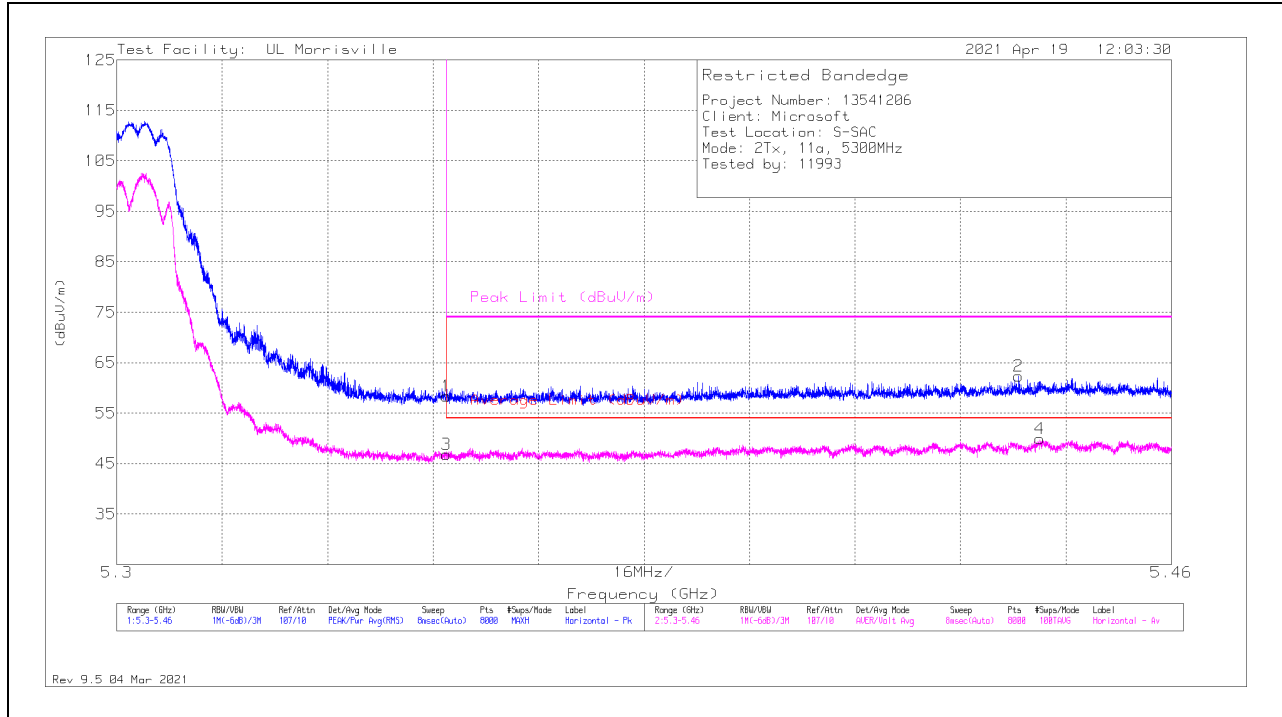

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	47.11	Pk	34.5	-23.2	0	58.41	-	-	74	-15.59	45	256	H
2	* ** 5.43684	51.21	Pk	34.5	-23.4	0	62.31	-	-	74	-11.69	45	256	H
3	* ** 5.35001	35.35	ADV	34.5	-23.2	.19	46.84	54	-7.16	-	-	45	256	H
4	* ** 5.44002	38.68	ADV	34.5	-23.5	.19	49.87	54	-4.13	-	-	45	256	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

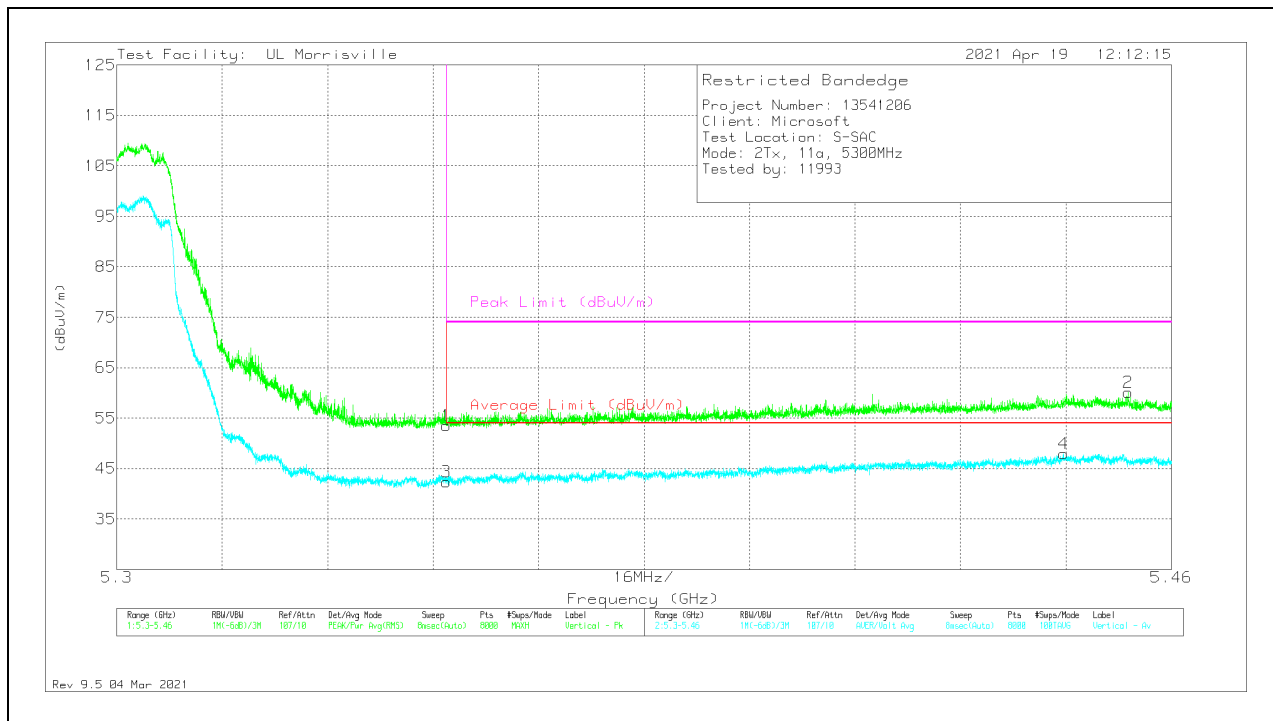

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 5.35001	42.26	Pk	34.5	-23.2	0	53.56	-	-	74	-20.44	295	250	V
2	** 5.45346	49.04	Pk	34.5	-23.4	0	60.14	-	-	74	-13.86	295	250	V
3	** 5.35001	30.82	ADV	34.5	-23.2	.19	42.31	54	-11.69	-	-	295	250	V
4	** 5.4436	36.72	ADV	34.5	-23.5	.19	47.91	54	-6.09	-	-	295	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 56)

HORIZONTAL RESULT

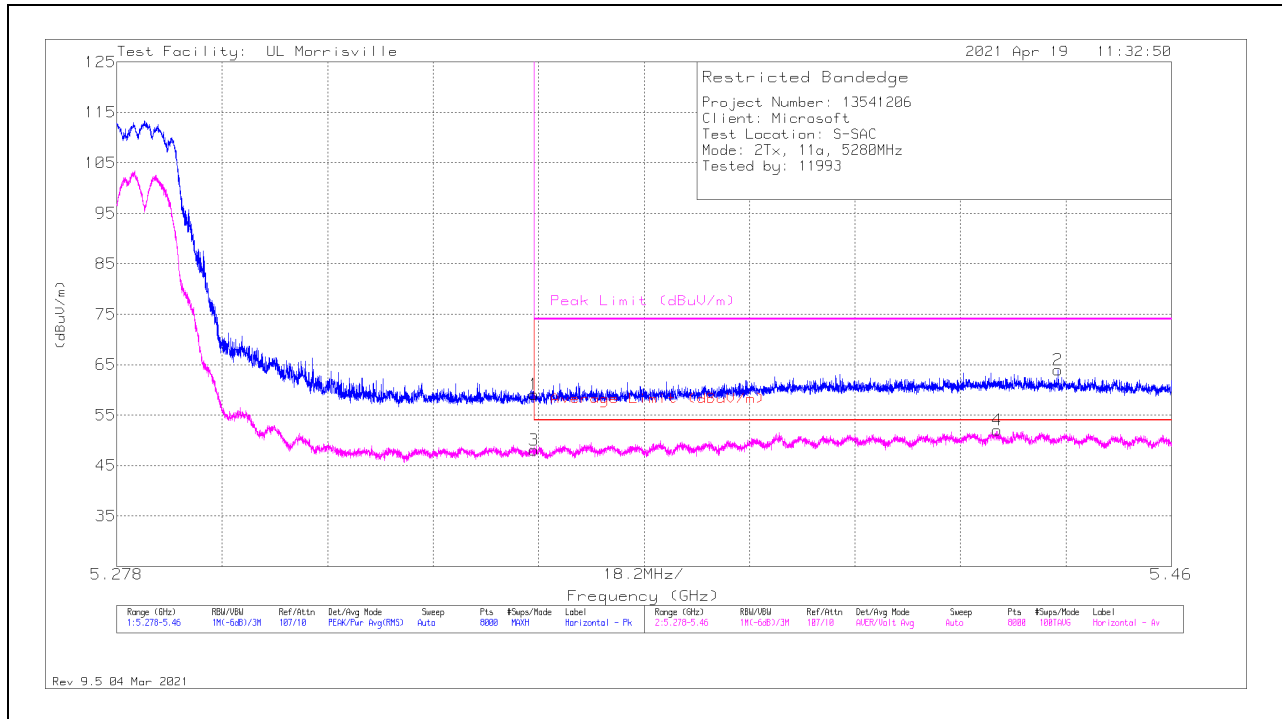

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	47.76	Pk	34.5	-23.2	0	59.06	-	-	74	-14.94	36	238	H
2	* ** 5.44041	52.9	Pk	34.5	-23.5	0	63.9	-	-	74	-10.1	36	238	H
3	* ** 5.35001	36.62	ADV	34.5	-23.2	.19	48.11	54	-5.89	-	-	36	238	H
4	* ** 5.42992	40.79	ADV	34.5	-23.5	.19	51.98	54	-2.02	-	-	36	238	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - U-NII AD primary method, Linear Voltage Average

VERTICAL RESULT

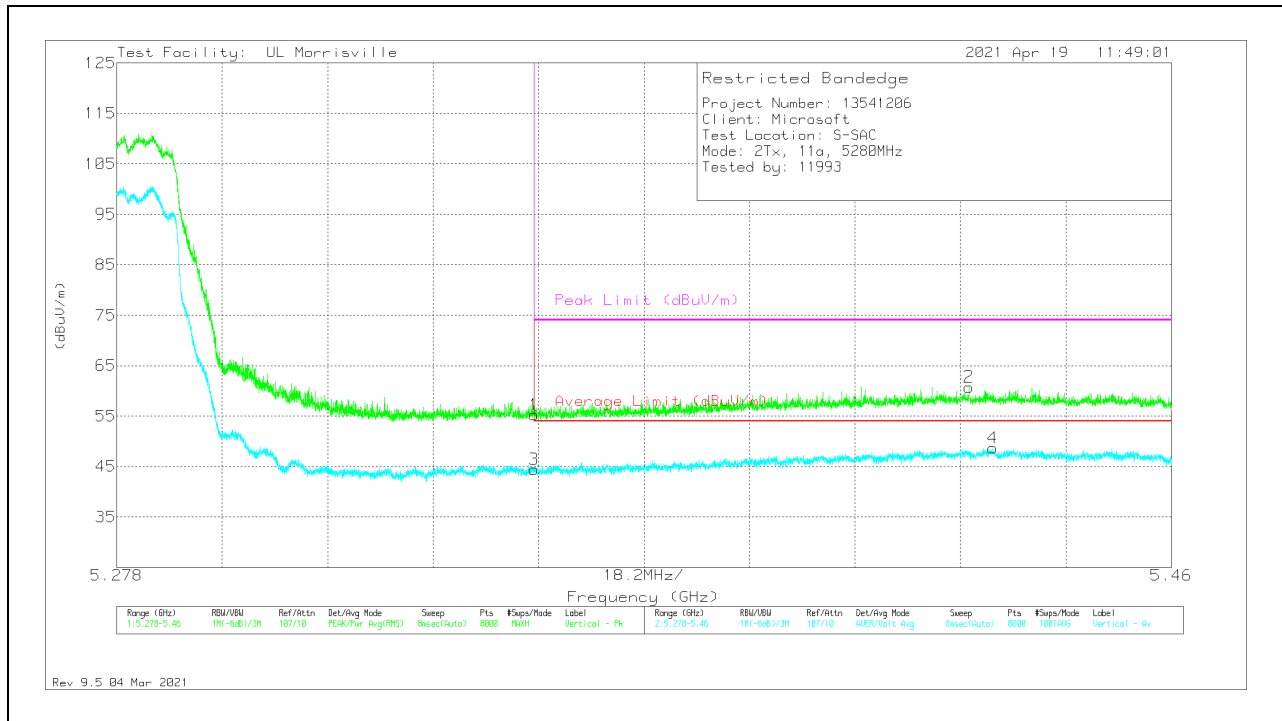


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.94	Pk	34.5	-23.2	0	55.24	-	-	74	-18.76	288	235	V
2	* ** 5.42505	49.68	Pk	34.5	-23.4	0	60.78	-	-	74	-13.22	288	235	V
3	* ** 5.35001	32.97	ADV	34.5	-23.2	.19	44.46	54	-9.54	-	-	288	235	V
4	* ** 5.42919	37.47	ADV	34.5	-23.5	.19	48.66	54	-5.34	-	-	288	235	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - U-NII AD primary method, Linear Voltage Average

BANDEDGE (HIGH CHANNEL 52)

HORIZONTAL RESULT

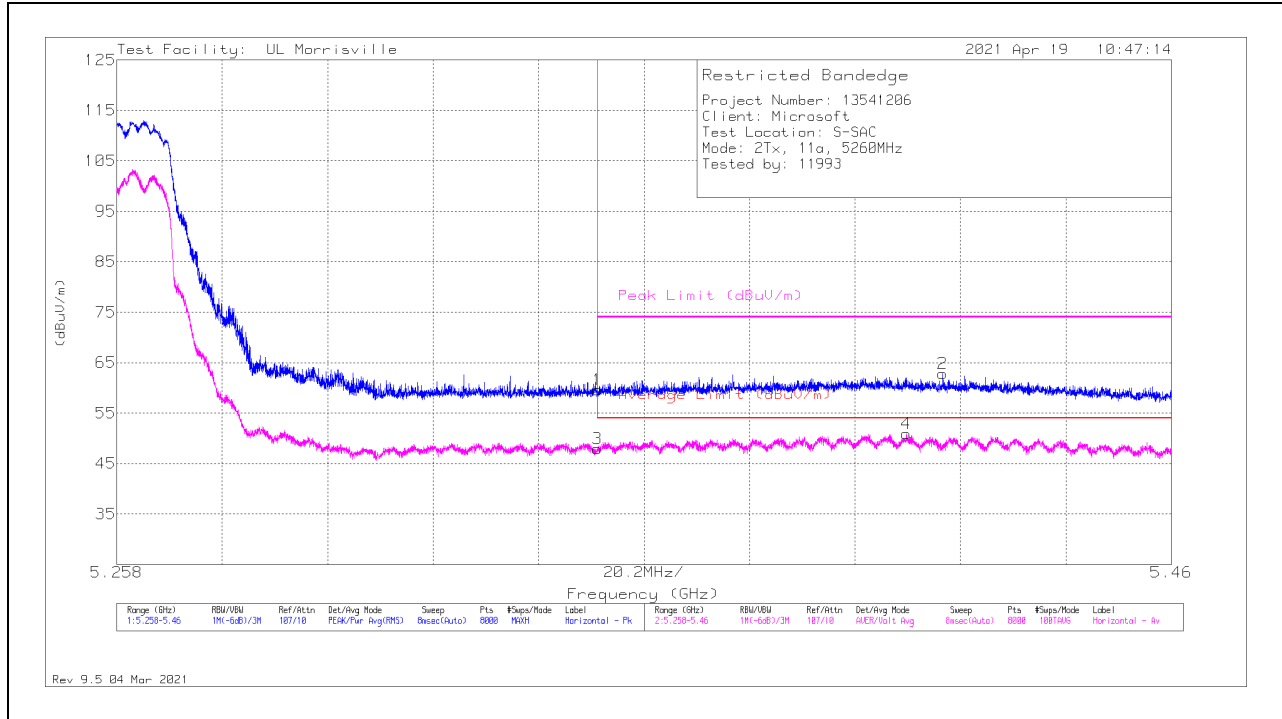

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	48.32	Pk	34.5	-23.2	0	59.62	-	-	74	-14.38	104	174	H
2	* ** 5.41624	51.58	Pk	34.5	-23.3	0	62.78	-	-	74	-11.22	104	174	H
3	* ** 5.35002	36.46	ADV	34.5	-23.2	.19	47.95	54	-6.05	-	-	104	174	H
4	* ** 5.40922	39.48	ADV	34.5	-23.3	.19	50.87	54	-3.13	-	-	104	174	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - U-NII AD primary method, Linear Voltage Average

VERTICAL RESULT

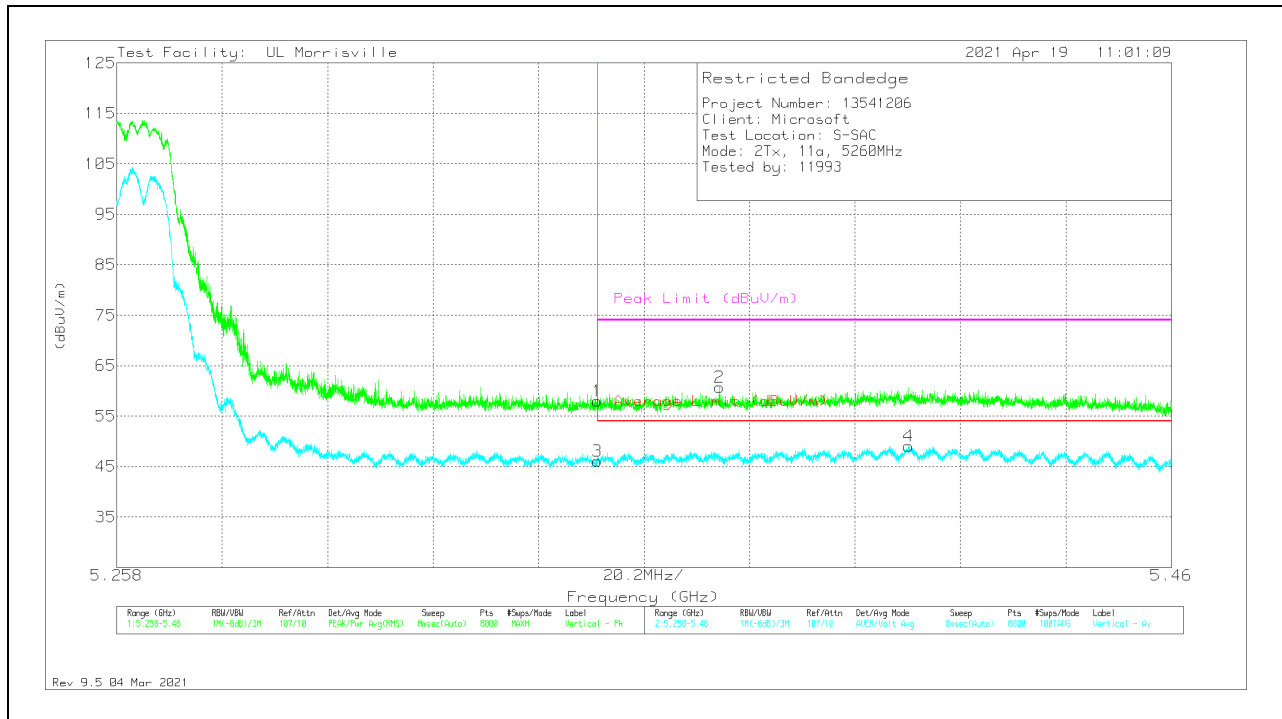


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	46.66	Pk	34.5	-23.2	0	57.96	-	-	74	-16.04	33	232	V
2	* ** 5.37351	49.49	Pk	34.5	-23.3	0	60.69	-	-	74	-13.31	33	232	V
3	* ** 5.35002	34.57	ADV	34.5	-23.2	.19	46.06	54	-7.94	-	-	33	232	V
4	* ** 5.40964	37.69	ADV	34.5	-23.3	.19	49.08	54	-4.92	-	-	33	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - U-NII AD primary method, Linear Voltage Average


HARMONICS AND SPURIOUS EMISSIONS

Note – Radiated Spurious emissions for this section was performed at the maximum power setting for Low/Mid/High Channels.

LOW CHANNEL RESULTS

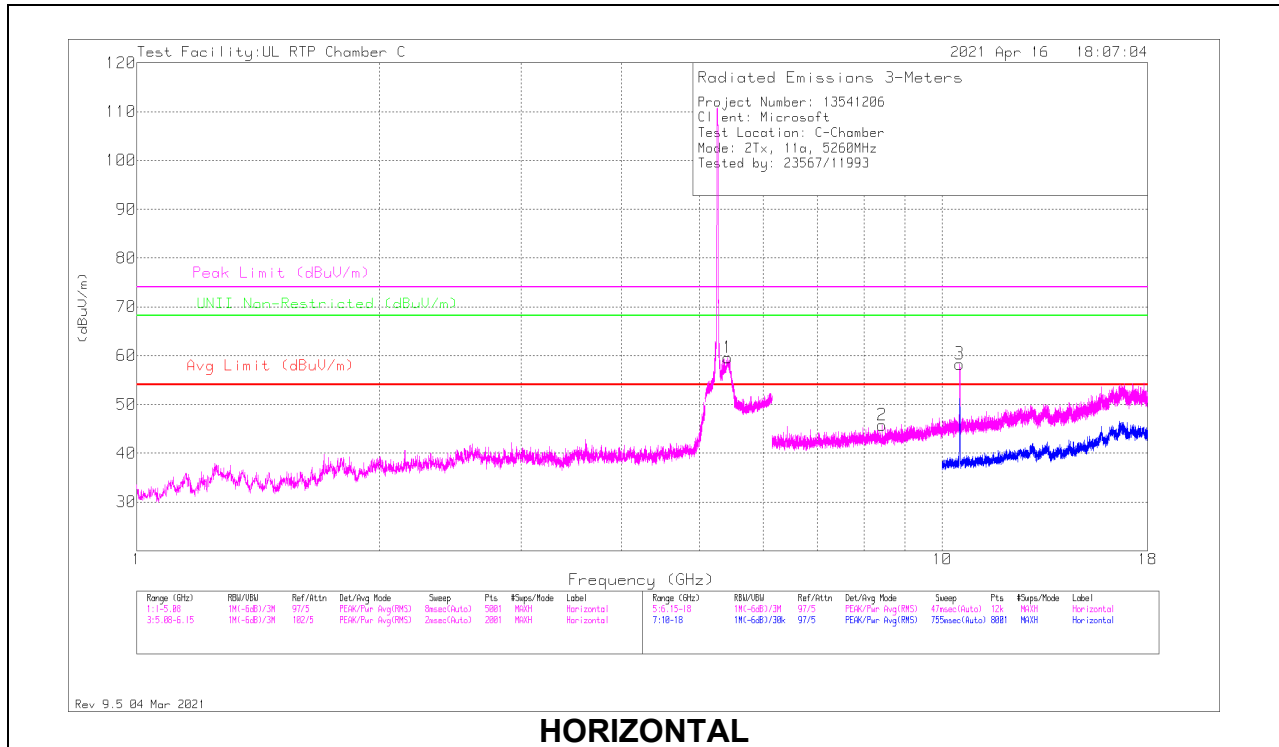

HORIZONTAL

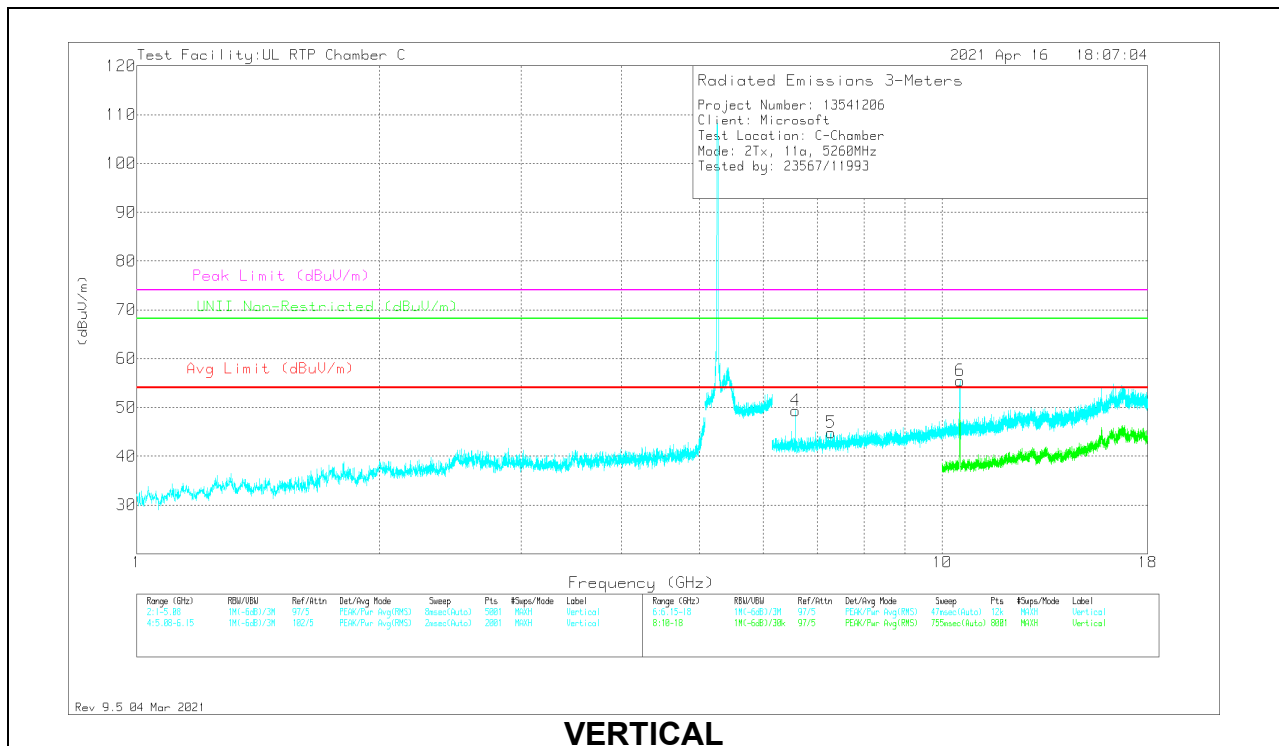

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.42169	43.39	PK-U	34.8	-13.4	0	64.79	-	-	74	-9.21	-	-	208	237	H
	* ** 5.42117	31.54	ADV	34.8	-13.4	.19	53.13	54	-.87	-	-	-	-	208	237	H
2	* ** 8.42816	52.43	Pk	36	-42.7	0	45.73	54	-8.27	74	-28.27	-	-	0-360	101	H
5	* ** 7.28168	52.85	Pk	35.9	-43.9	0	44.85	54	-9.15	74	-29.15	-	-	0-360	101	V
4	6.5749	63	PK-U	35.8	-45.5	0	53.3	-	-	-	-	68.2	-14.9	201	235	V
3	10.51887	64.81	PK-U	37.8	-40.5	0	62.11	-	-	-	-	68.2	-6.09	206	257	H
6	10.52504	61.46	PK-U	37.8	-40.6	0	58.66	-	-	-	-	68.2	-9.54	254	287	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

MID CHANNEL RESULTS

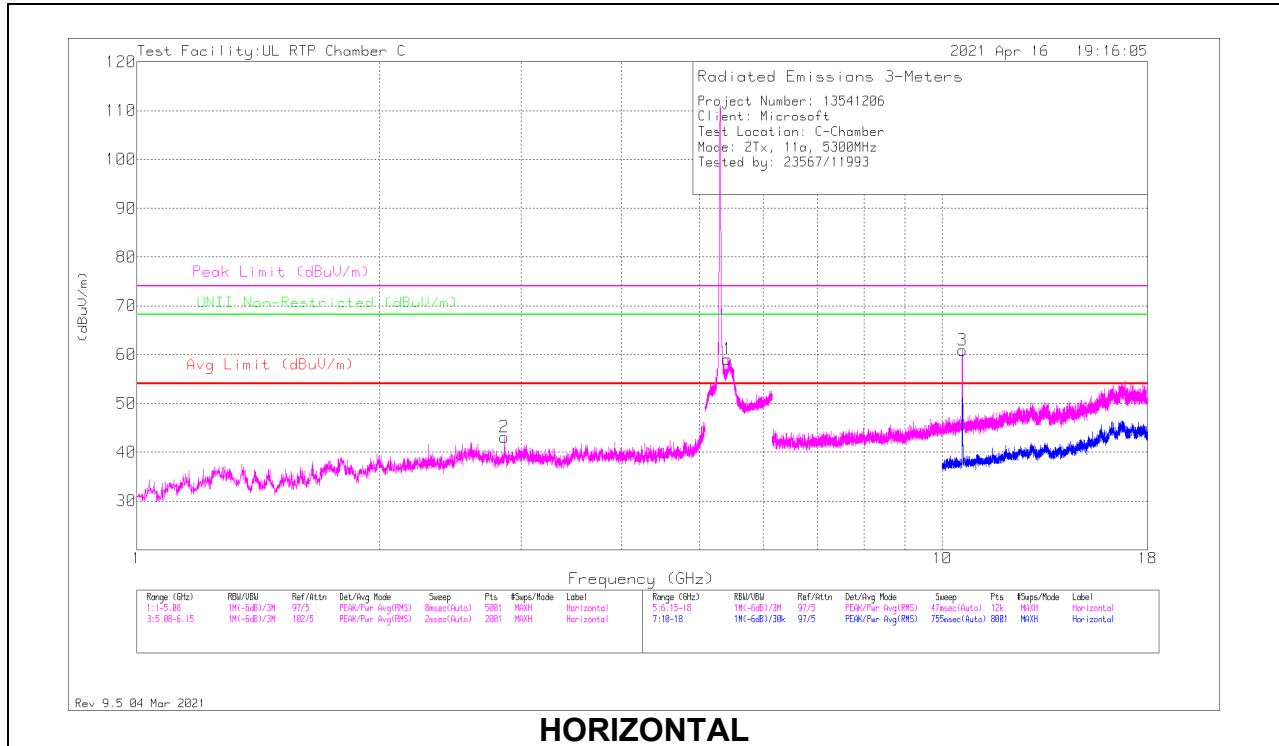

HORIZONTAL

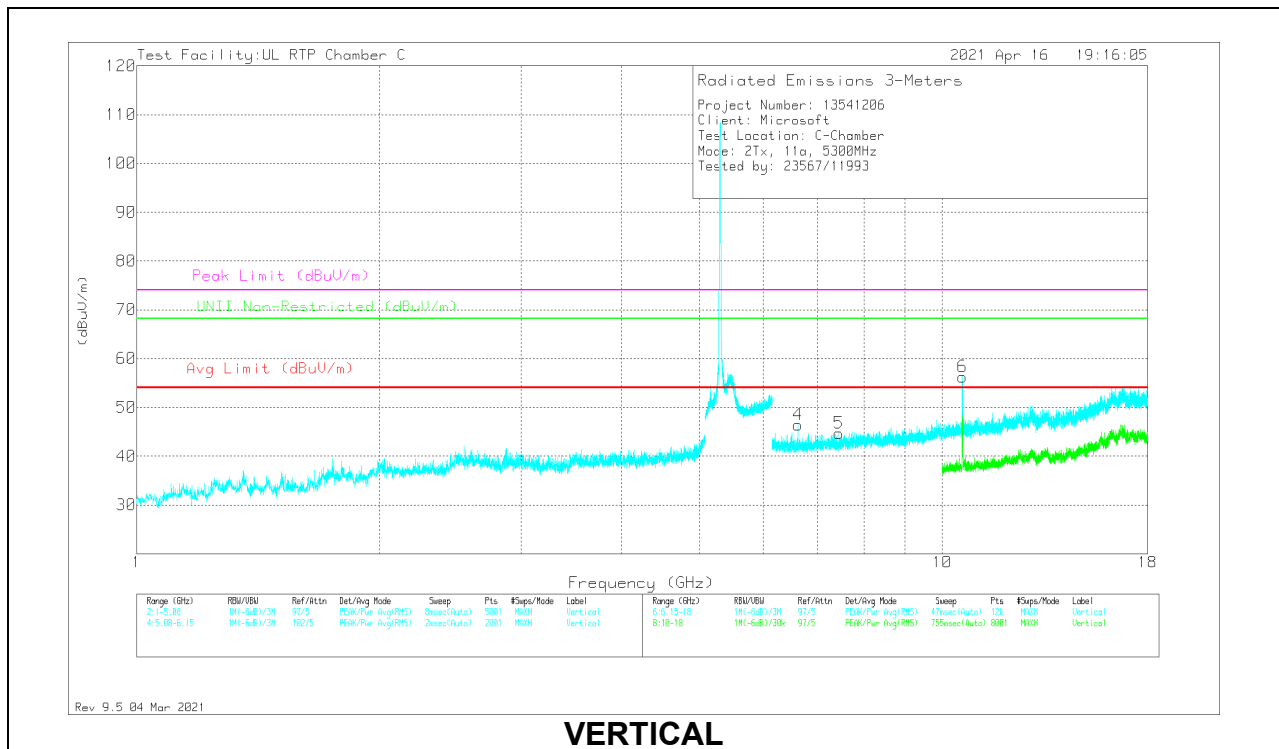

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.42312	41.11	PK-U	34.8	-13.4	0	62.51	-	-	74	-11.49	-	-	198	306	H
	* ** 5.422	28.81	ADV	34.8	-13.4	.19	50.4	54	-3.6	-	-	-	-	198	306	H
6	* ** 10.60508	63.4	PK-U	37.9	-40.7	0	60.6	-	-	74	-13.4	-	-	266	221	V
	* ** 10.60435	49.85	ADV	37.9	-40.7	.19	47.24	54	-6.76	-	-	-	-	266	221	V
2	* ** 2.86211	60.03	PK	32.5	-49.4	0	43.13	54	-10.87	74	-30.87	-	-	0-360	200	H
5	* ** 7.4456	53.35	PK	35.9	-44.5	0	44.75	54	-9.25	74	-29.25	-	-	0-360	101	V
3	10.59879	65.43	PK-U	37.9	-40.7	0	62.63	-	-	-	-	68.2	-5.57	267	104	H
4	6.62499	56.03	PK	35.8	-45.4	0	46.43	-	-	-	-	68.2	-21.77	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

PK - Peak detector

HIGH CHANNEL RESULTS

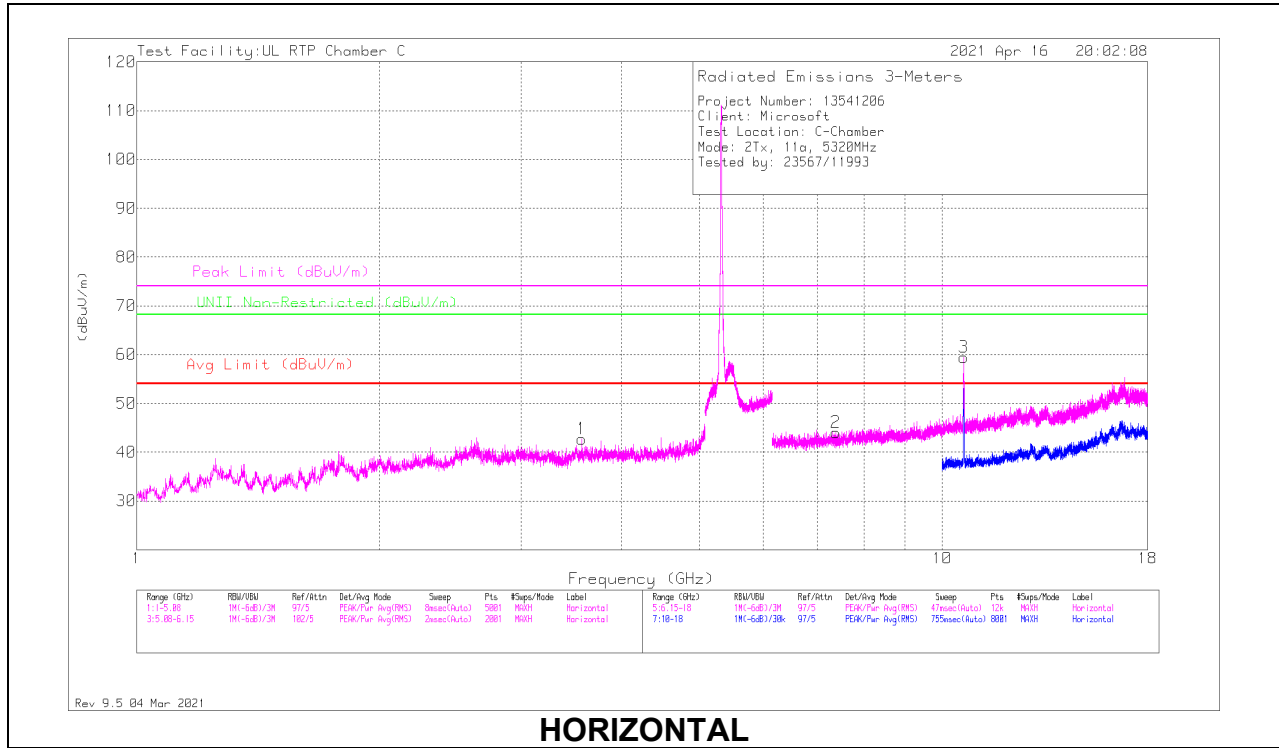

HORIZONTAL

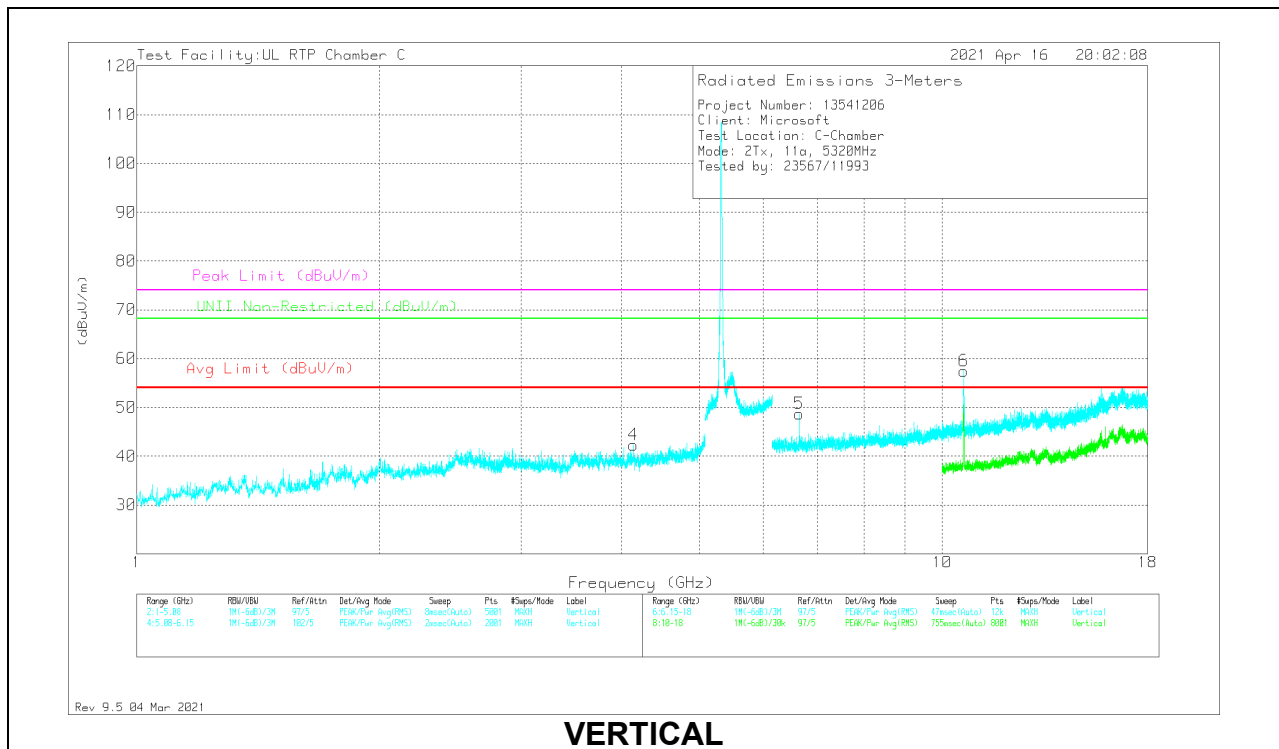

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 10.63945	65.91	PK-U	37.9	-40.3	0	63.51	-	-	74	-10.49	-	-	266	101	H
	* ** 10.63917	53.19	ADV	37.9	-40.3	.19	50.98	54	-3.02	-	-	-	-	266	101	H
6	* ** 10.64319	63.99	PK-U	37.9	-40.2	0	61.69	-	-	74	-12.31	-	-	256	233	V
	* ** 10.64298	50.98	ADV	37.9	-40.2	.19	48.87	54	-5.13	-	-	-	-	256	233	V
1	* ** 3.57203	57.56	Pk	33.2	-48.1	0	42.66	54	-11.34	74	-31.34	-	-	0-360	101	H
4	* ** 4.13589	56.22	Pk	33.5	-47.4	0	42.32	54	-11.68	74	-31.68	-	-	0-360	200	V
2	* ** 7.38043	52.87	Pk	35.9	-44.7	0	44.07	54	-9.93	74	-29.93	-	-	0-360	200	H
5	6.64999	62.34	PK-U	35.8	-44.9	0	53.24	-	-	-	-	68.2	-14.96	205	234	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak

ADV - Linear Voltage Average


Pk - Peak detector

10.1.6. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX Antenna A MODE

BANDEDGE (HIGH CHANNEL 64)


HORIZONTAL RESULT

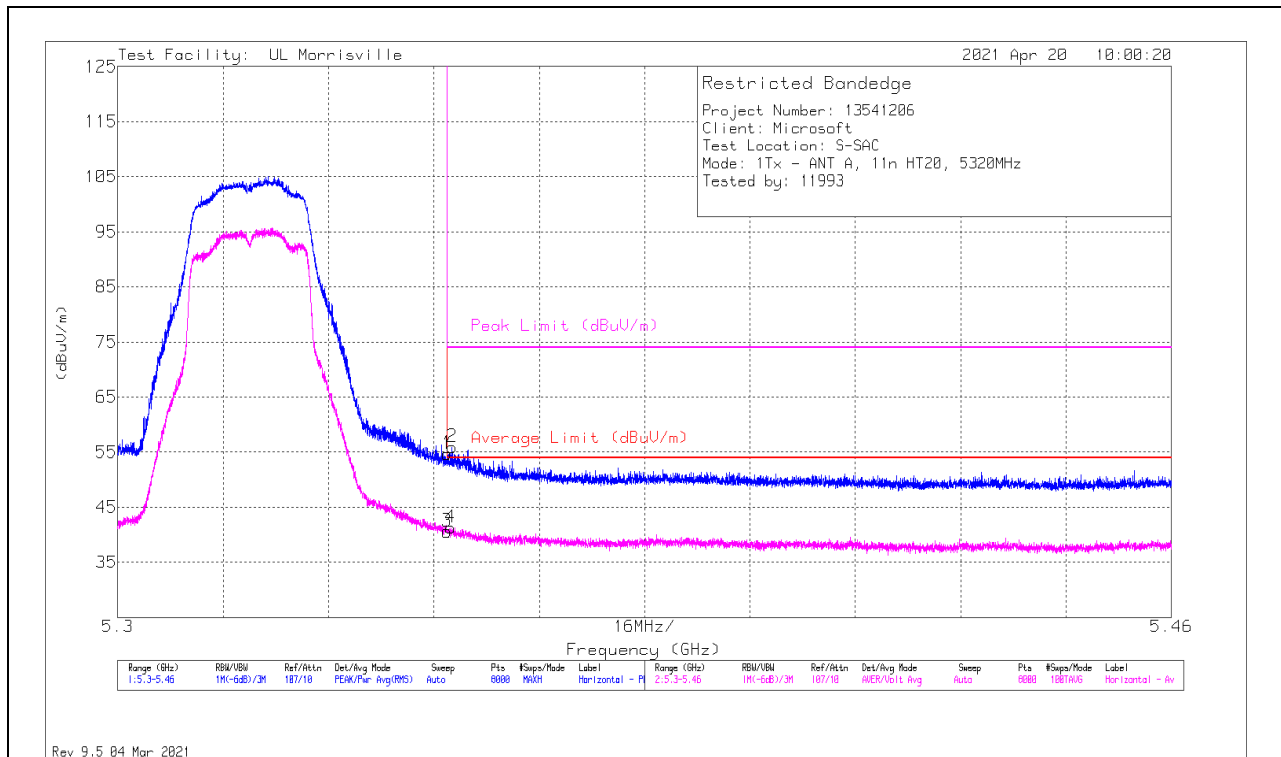

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	43.38	Pk	34.5	-23.2	54.68	-	-	74	-19.32	195	148	H
2	*** 5.35075	44.6	Pk	34.5	-23.2	55.9	-	-	74	-18.1	195	148	H
3	*** 5.35001	29.31	ADV	34.5	-23.2	40.61	54	-13.39	-	-	195	148	H
4	*** 5.35057	29.98	ADV	34.5	-23.2	41.28	54	-12.72	-	-	195	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

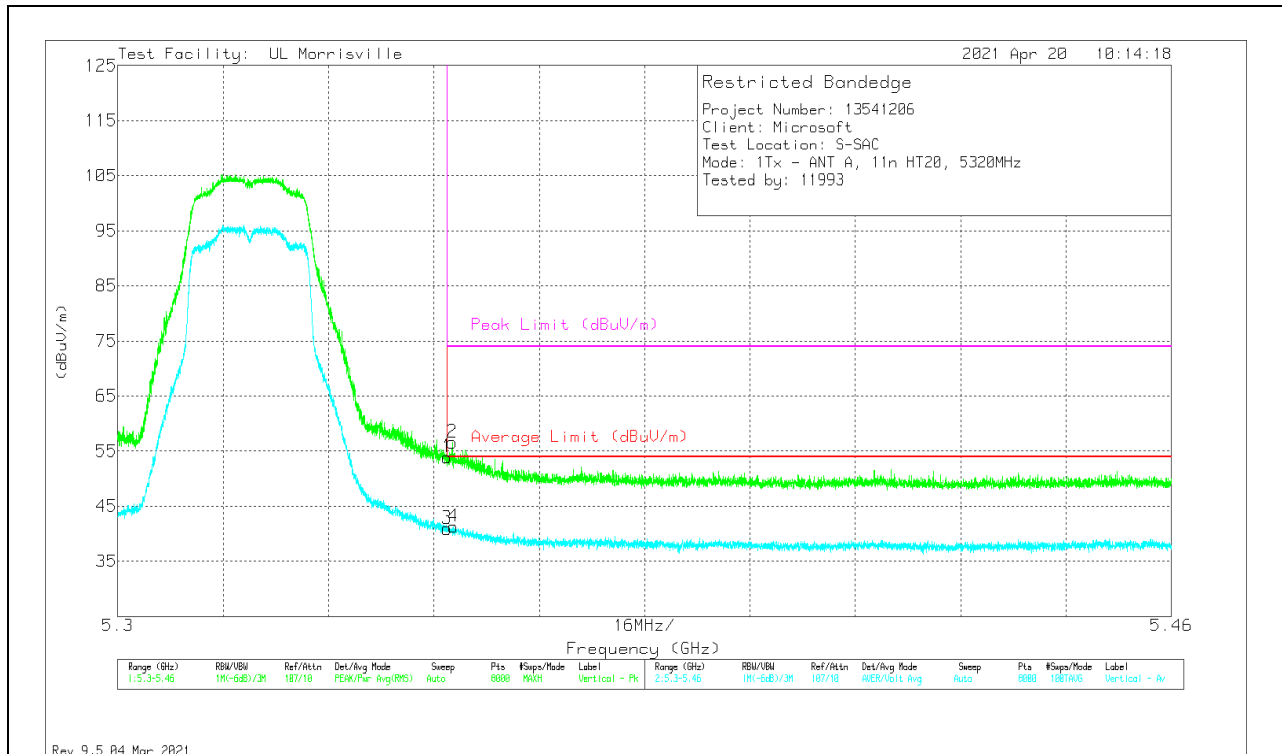


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	42.59	Pk	34.5	-23.2	53.89	-	-	74	-20.11	215	106	V
2	* ** 5.35077	45.31	Pk	34.5	-23.2	56.61	-	-	74	-17.39	215	106	V
3	* ** 5.35001	29.63	ADV	34.5	-23.2	40.93	54	-13.07	-	-	215	106	V
4	* ** 5.35095	29.96	ADV	34.5	-23.2	41.26	54	-12.74	-	-	215	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 60)


HORIZONTAL RESULT

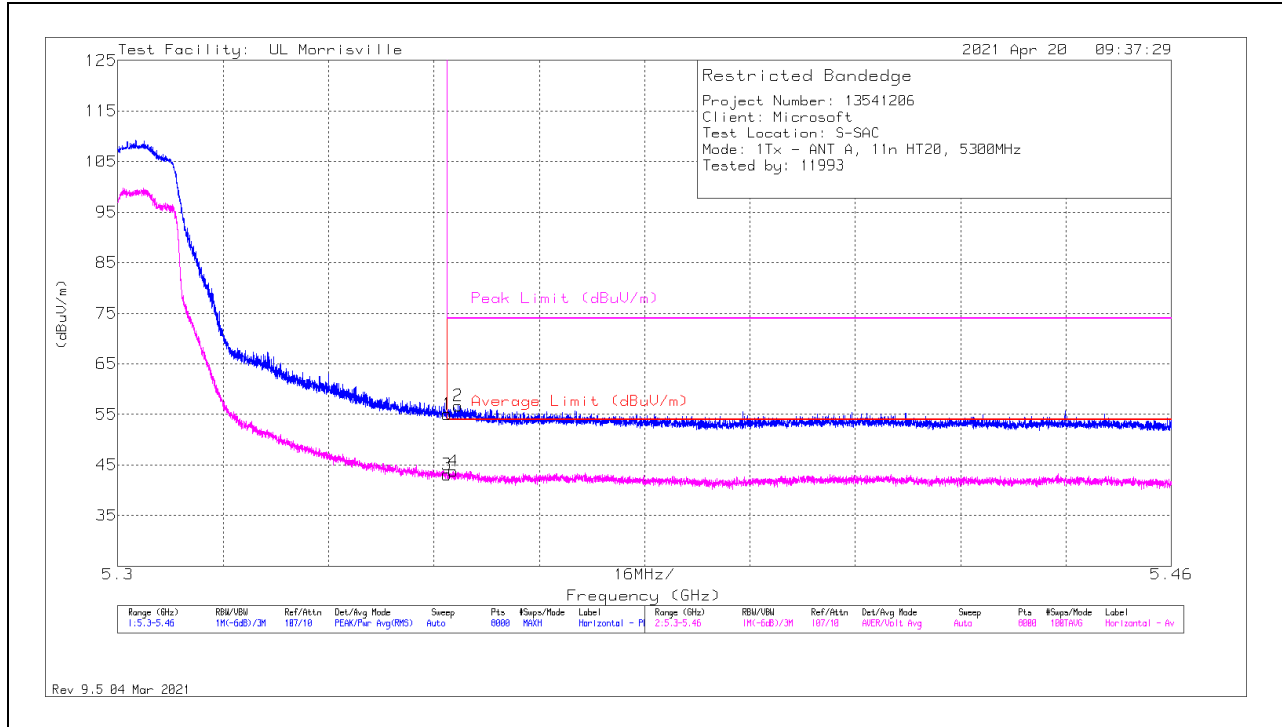

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.75	Pk	34.5	-23.2	55.05	-	-	74	-18.95	146	133	H
2	* ** 5.35167	45.43	Pk	34.5	-23.2	56.73	-	-	74	-17.27	146	133	H
3	* ** 5.35001	31.8	ADV	34.5	-23.2	43.1	54	-10.9	-	-	146	133	H
4	* ** 5.35095	32.49	ADV	34.5	-23.2	43.79	54	-10.21	-	-	146	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

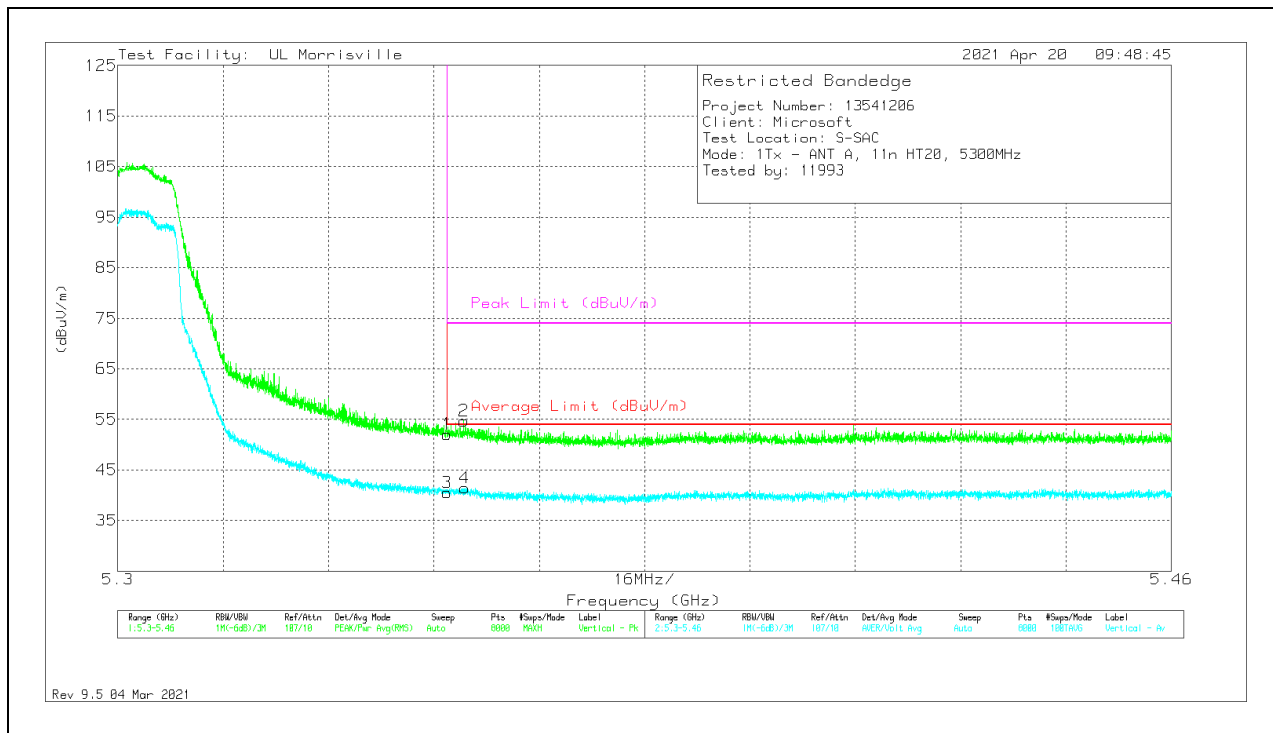


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.74	Pk	34.5	-23.2	52.04	-	-	74	-21.96	68	125	V
2	* ** 5.35253	43.42	Pk	34.5	-23.2	54.72	-	-	74	-19.28	68	125	V
3	* ** 5.35001	29.23	ADV	34.5	-23.2	40.53	54	-13.47	-	-	68	125	V
4	* ** 5.35271	30.12	ADV	34.5	-23.2	41.42	54	-12.58	-	-	68	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 56)


HORIZONTAL RESULT

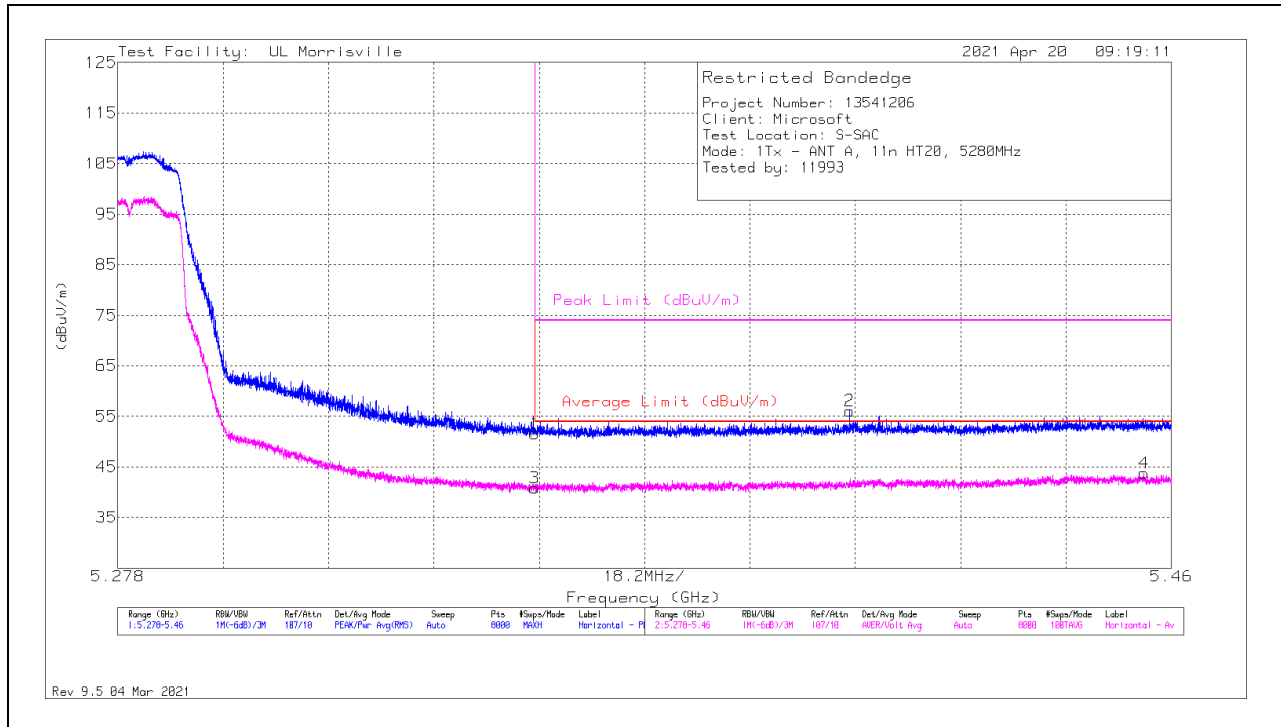

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.34	Pk	34.5	-23.2	51.64	-	-	74	-22.36	171	164	H
2	* ** 5.40442	44.91	Pk	34.5	-23.3	56.11	-	-	74	-17.89	171	164	H
3	* ** 5.35001	29.54	ADV	34.5	-23.2	40.84	54	-13.16	-	-	171	164	H
4	* ** 5.45525	32.77	ADV	34.5	-23.5	43.77	54	-10.23	-	-	171	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

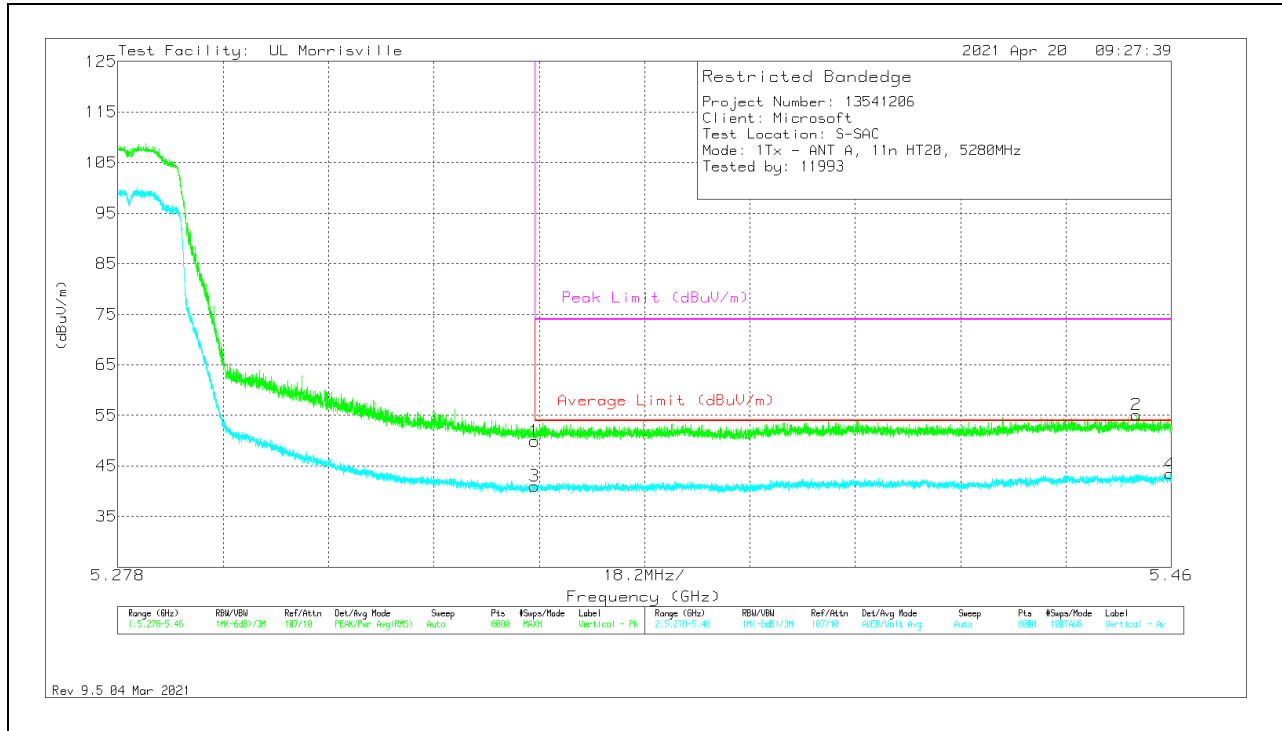


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	38.64	Pk	34.5	-23.2	49.94	-	-	74	-24.06	215	131	V
2	* ** 5.45395	44.01	Pk	34.5	-23.4	55.11	-	-	74	-18.89	215	131	V
3	* ** 5.35001	29.71	ADV	34.5	-23.2	41.01	54	-12.99	-	-	215	131	V
4	* ** 5.45977	32.44	ADV	34.5	-23.5	43.44	54	-10.56	-	-	215	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 52)


HORIZONTAL RESULT

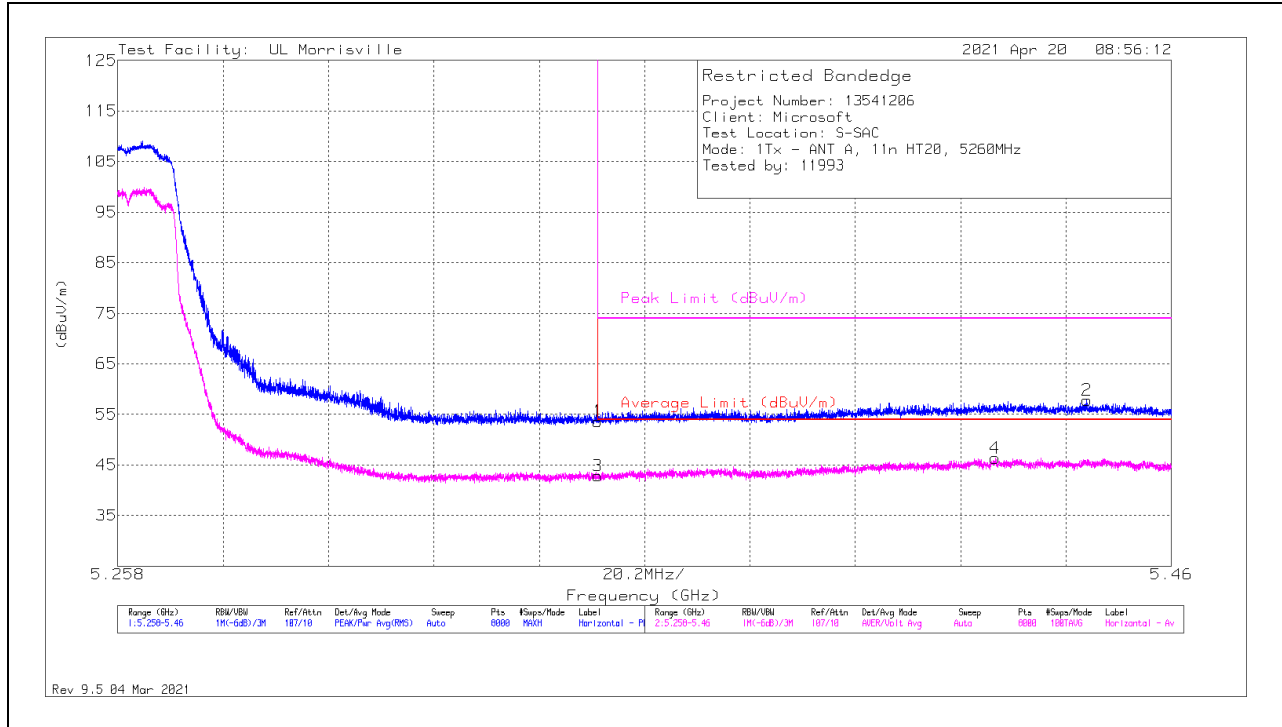

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	42.33	Pk	34.5	-23.2	53.63	-	-	74	-20.37	210	105	H
2	* ** 5.44376	46.82	Pk	34.5	-23.5	57.82	-	-	74	-16.18	210	105	H
3	* ** 5.35002	31.54	ADV	34.5	-23.2	42.84	54	-11.16	-	-	210	105	H
4	* ** 5.42624	35.27	ADV	34.5	-23.4	46.37	54	-7.63	-	-	210	105	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

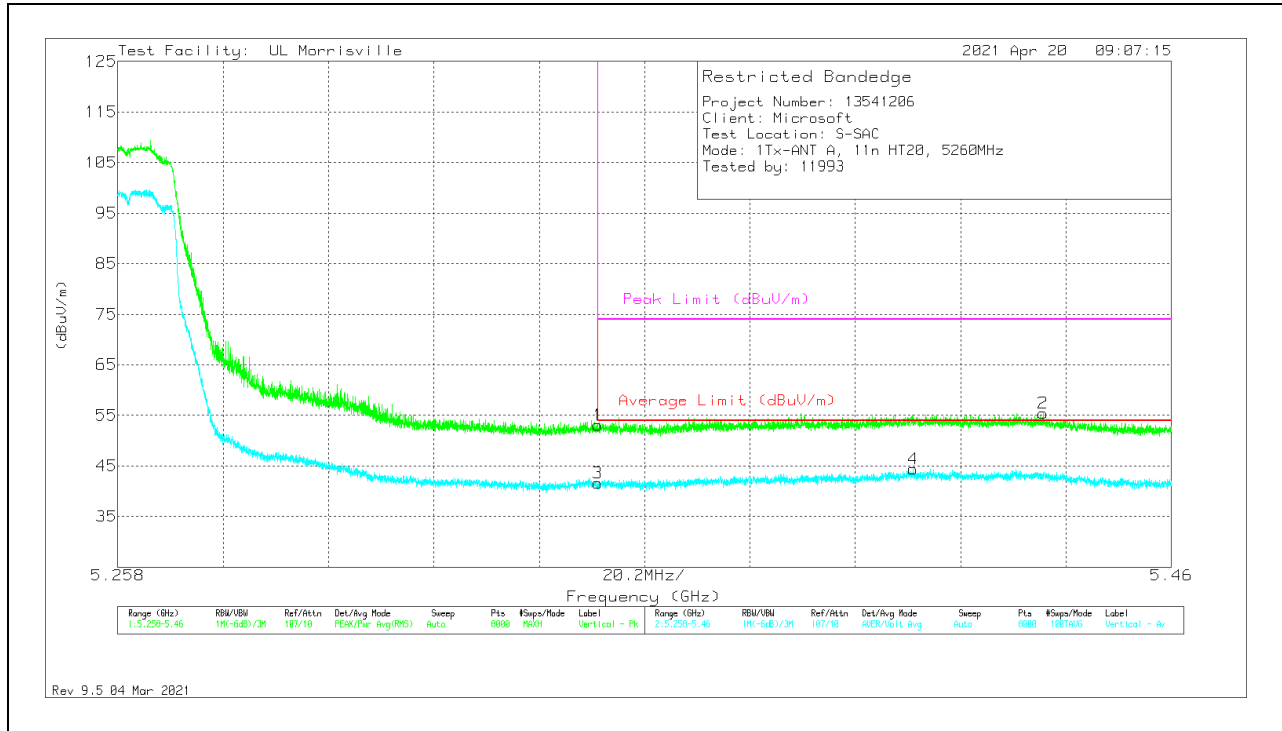


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	41.78	Pk	34.5	-23.2	53.08	-	-	74	-20.92	110	113	V
2	** * 5.4354	44.31	Pk	34.5	-23.4	55.41	-	-	74	-18.59	110	113	V
3	* ** 5.35002	30.28	ADV	34.5	-23.2	41.58	54	-12.42	-	-	110	113	V
4	* ** 5.41048	33.17	ADV	34.5	-23.3	44.37	54	-9.63	-	-	110	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B MODE

BANDEDGE (HIGH CHANNEL 64)

HORIZONTAL RESULT

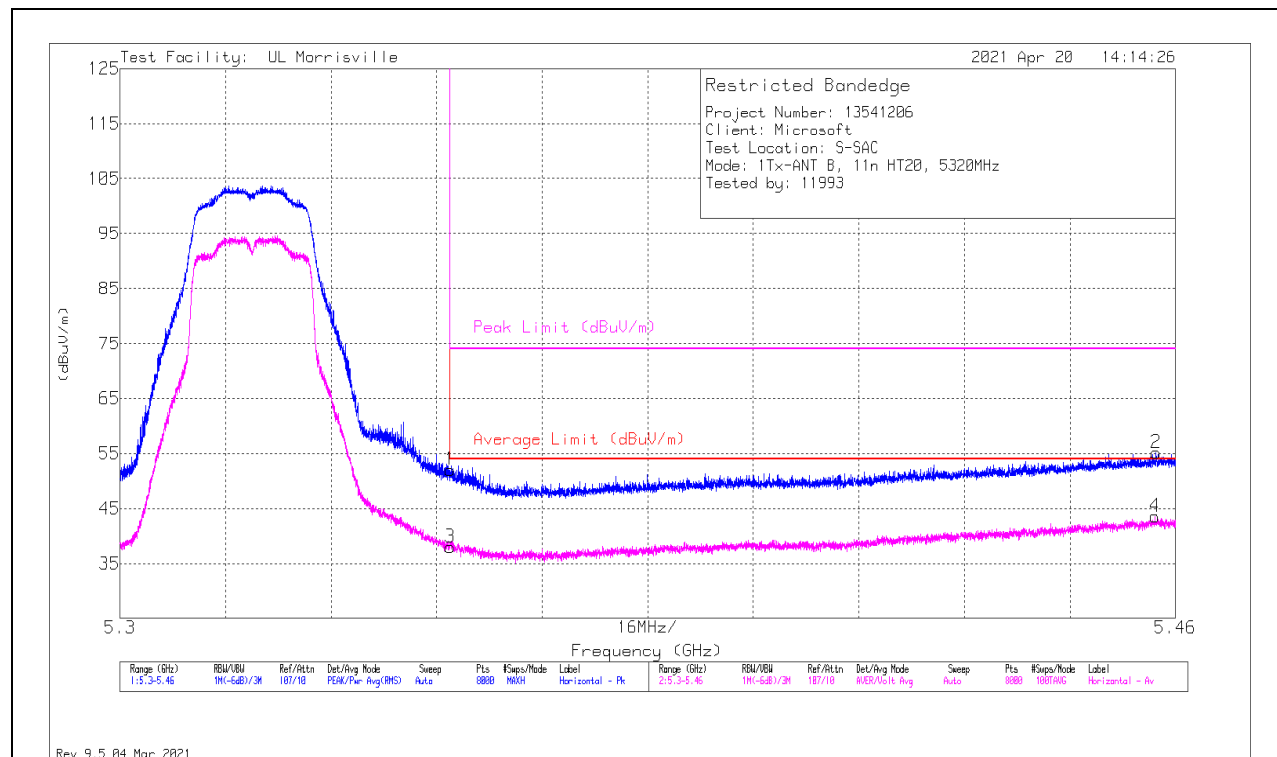

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	40.69	Pk	34.5	-23.2	51.99	-	-	74	-22.01	37	270	H
2	*** 5.45704	44.13	Pk	34.5	-23.5	55.13	-	-	74	-18.87	37	270	H
3	*** 5.35001	26.68	ADV	34.5	-23.2	37.98	54	-16.02	-	-	37	270	H
4	*** 5.45688	32.52	ADV	34.5	-23.5	43.52	54	-10.48	-	-	37	270	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

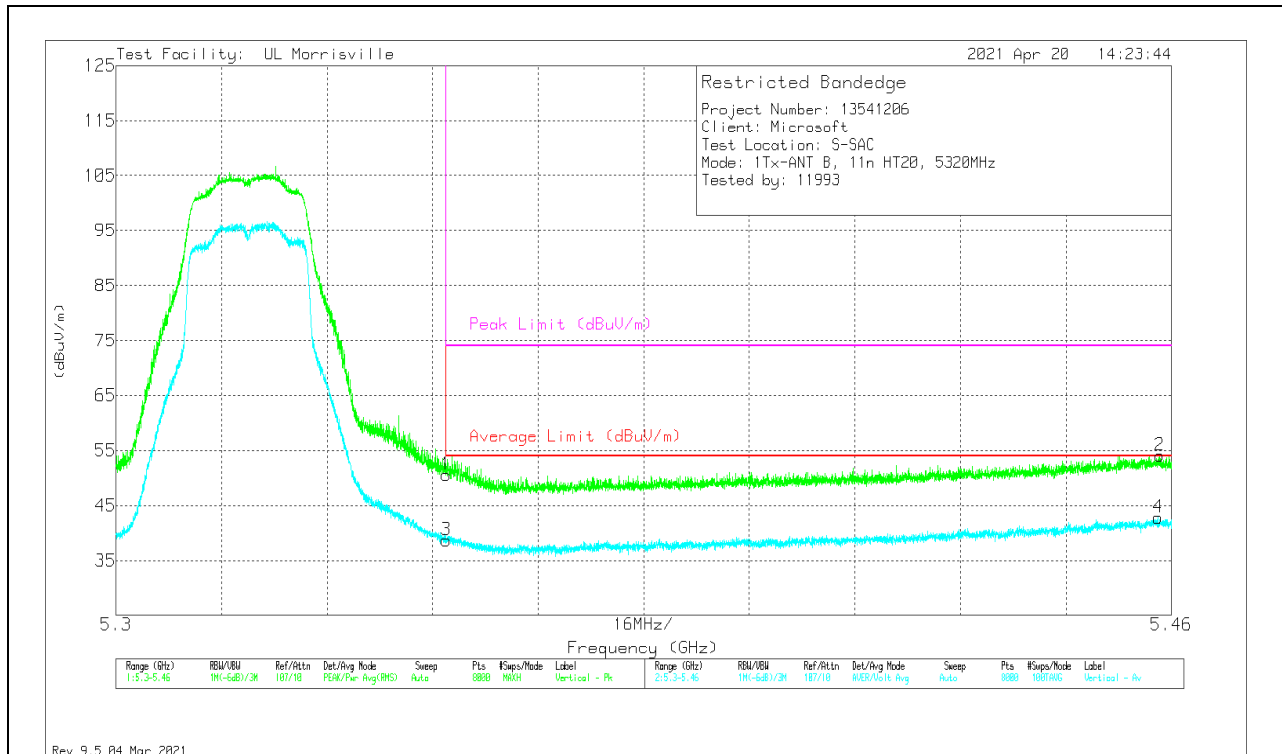


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	39.29	Pk	34.5	-23.2	50.59	-	-	74	-23.41	62	166	V
2	* ** 5.45822	43.07	Pk	34.5	-23.5	54.07	-	-	74	-19.93	62	166	V
3	* ** 5.35001	27.42	ADV	34.5	-23.2	38.72	54	-15.28	-	-	62	166	V
4	* ** 5.45794	31.84	ADV	34.5	-23.5	42.84	54	-11.16	-	-	62	166	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 60)


HORIZONTAL RESULT

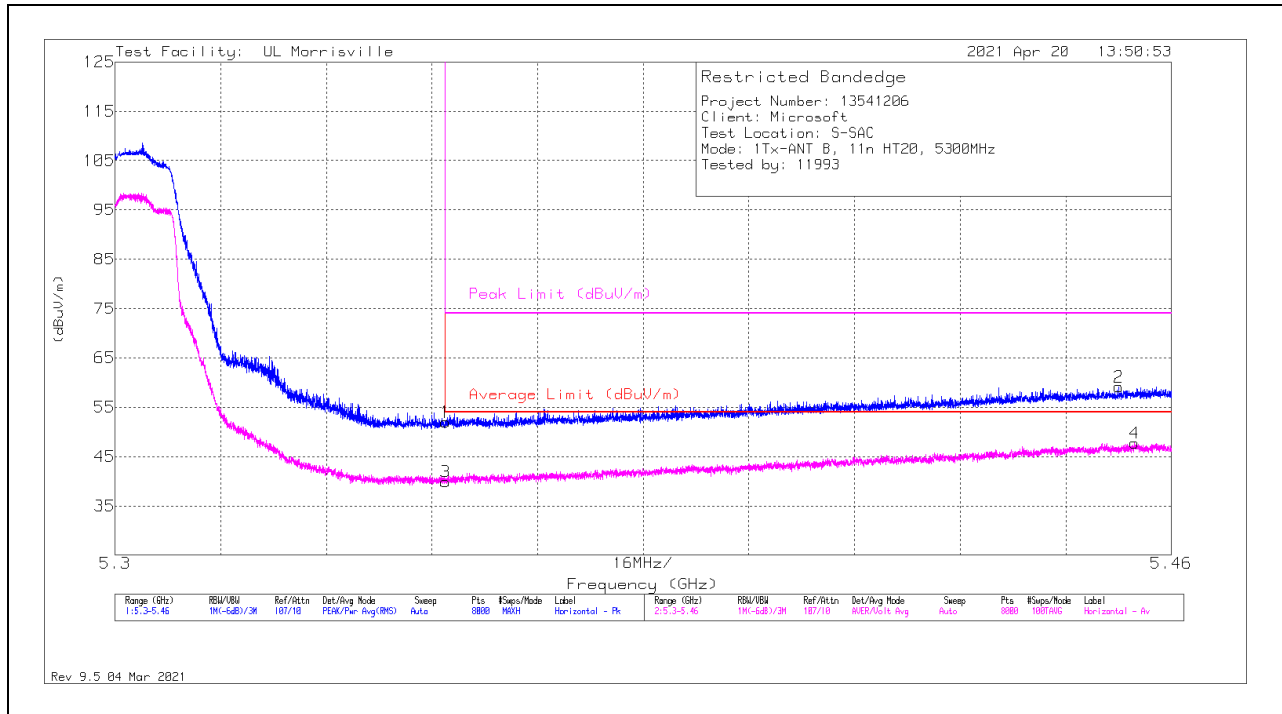

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.67	Pk	34.5	-23.2	51.97	-	-	74	-22.03	76	197	H
2	* ** 5.452	48.01	Pk	34.5	-23.4	59.11	-	-	74	-14.89	76	197	H
3	* ** 5.35001	28.6	ADV	34.5	-23.2	39.9	54	-14.1	-	-	76	197	H
4	* ** 5.45442	36.77	ADV	34.5	-23.5	47.77	54	-6.23	-	-	76	197	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

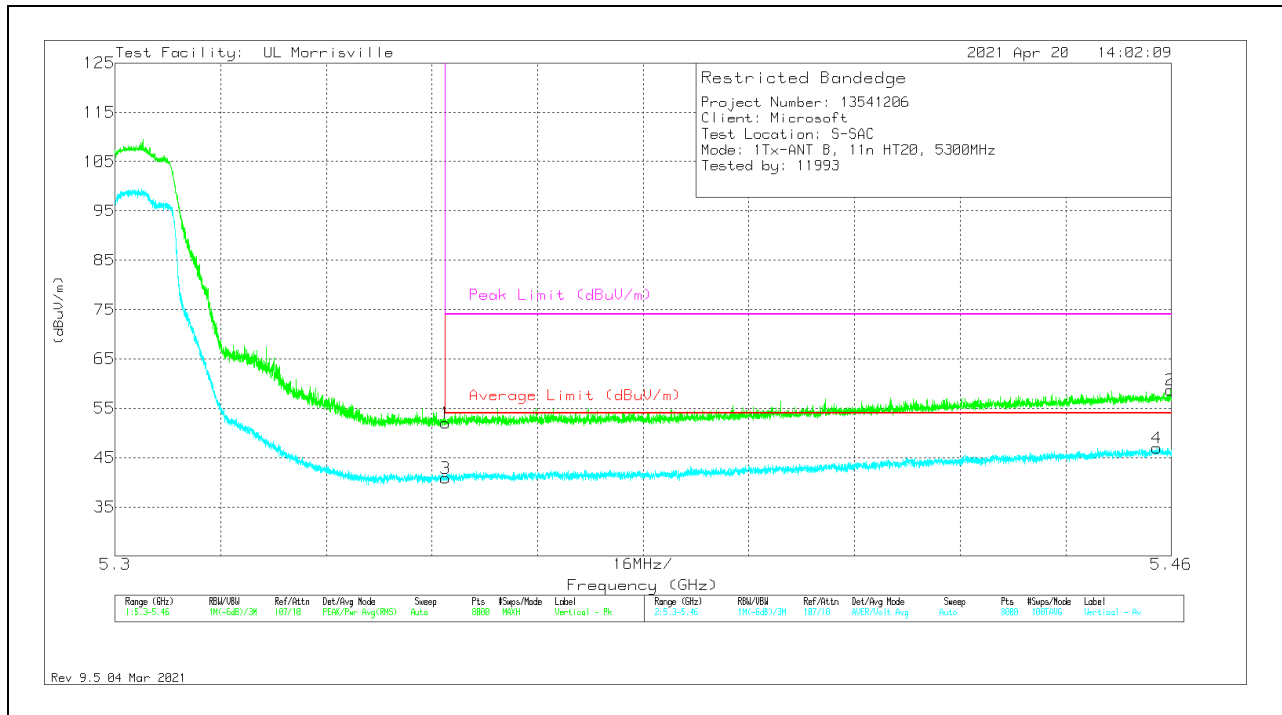


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.72	Pk	34.5	-23.2	52.02	-	-	74	-21.98	58	286	V
2	* ** 5.45986	47.76	Pk	34.5	-23.5	58.76	-	-	74	-15.24	58	286	V
3	* ** 5.35001	29.52	ADV	34.5	-23.2	40.82	54	-13.18	-	-	58	285	V
4	* ** 5.45778	35.95	ADV	34.5	-23.5	46.95	54	-7.05	-	-	58	285	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 56)


HORIZONTAL RESULT

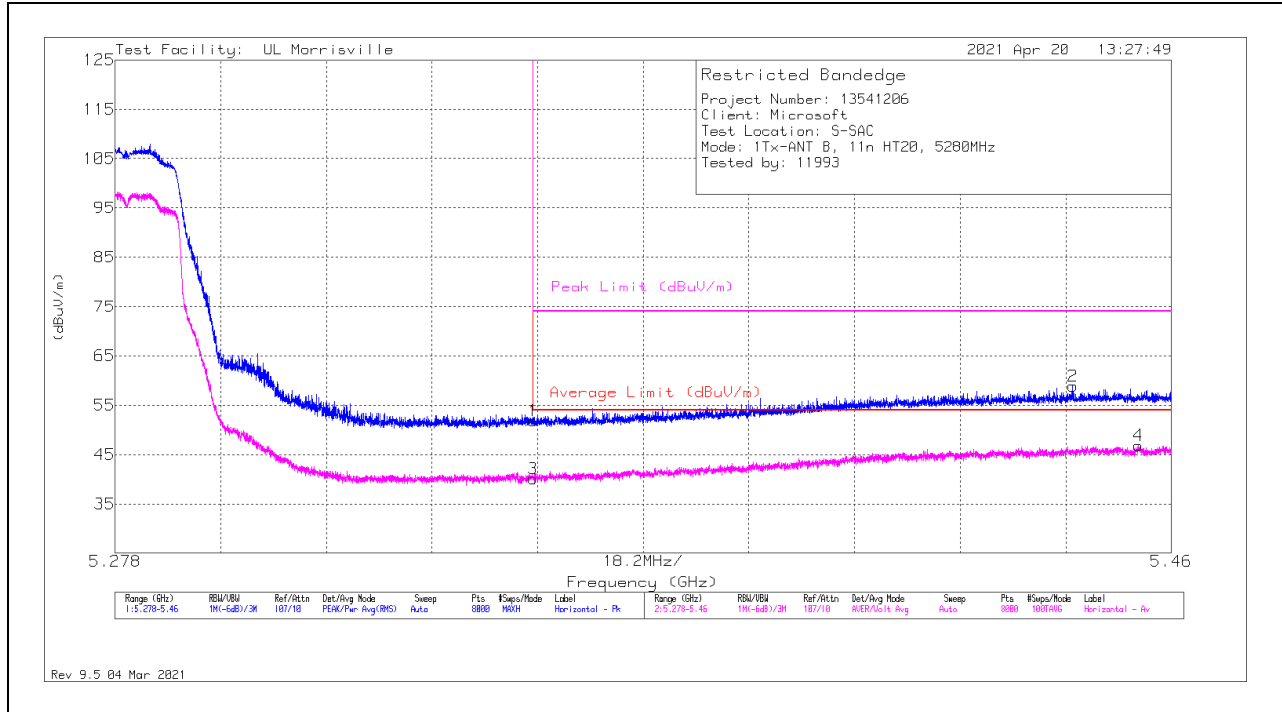

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.56	Pk	34.5	-23.2	51.86	-	-	74	-22.14	43	213	H
2	* ** 5.443	47.89	Pk	34.5	-23.5	58.89	-	-	74	-15.11	43	213	H
3	* ** 5.35001	28.85	ADV	34.5	-23.2	40.15	54	-13.85	-	-	43	213	H
4	* ** 5.45431	35.85	ADV	34.5	-23.5	46.85	54	-7.15	-	-	43	213	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

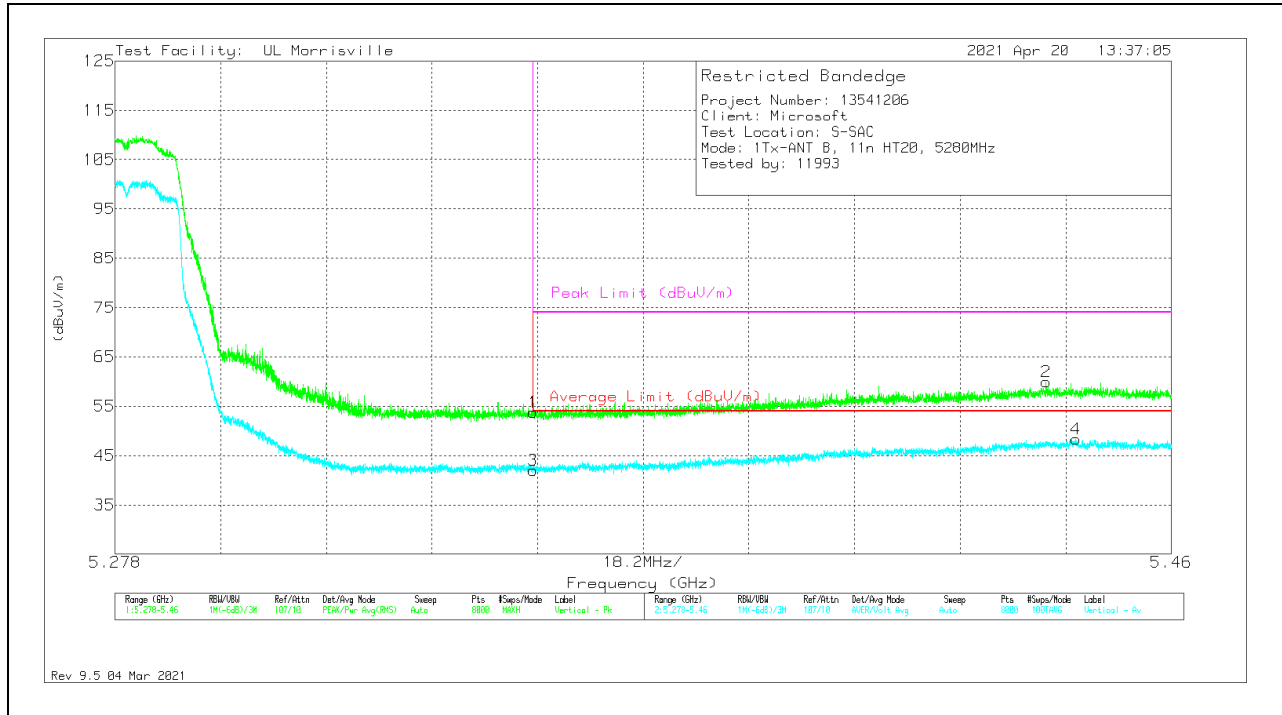


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	42.49	Pk	34.5	-23.2	53.79	-	-	74	-20.21	53	203	V
2	* ** 5.43841	48.87	Pk	34.5	-23.4	59.97	-	-	74	-14.03	53	203	V
3	* ** 5.35001	30.76	ADV	34.5	-23.2	42.06	54	-11.94	-	-	53	203	V
4	* ** 5.44353	37.35	ADV	34.5	-23.5	48.35	54	-5.65	-	-	53	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 52)


HORIZONTAL RESULT

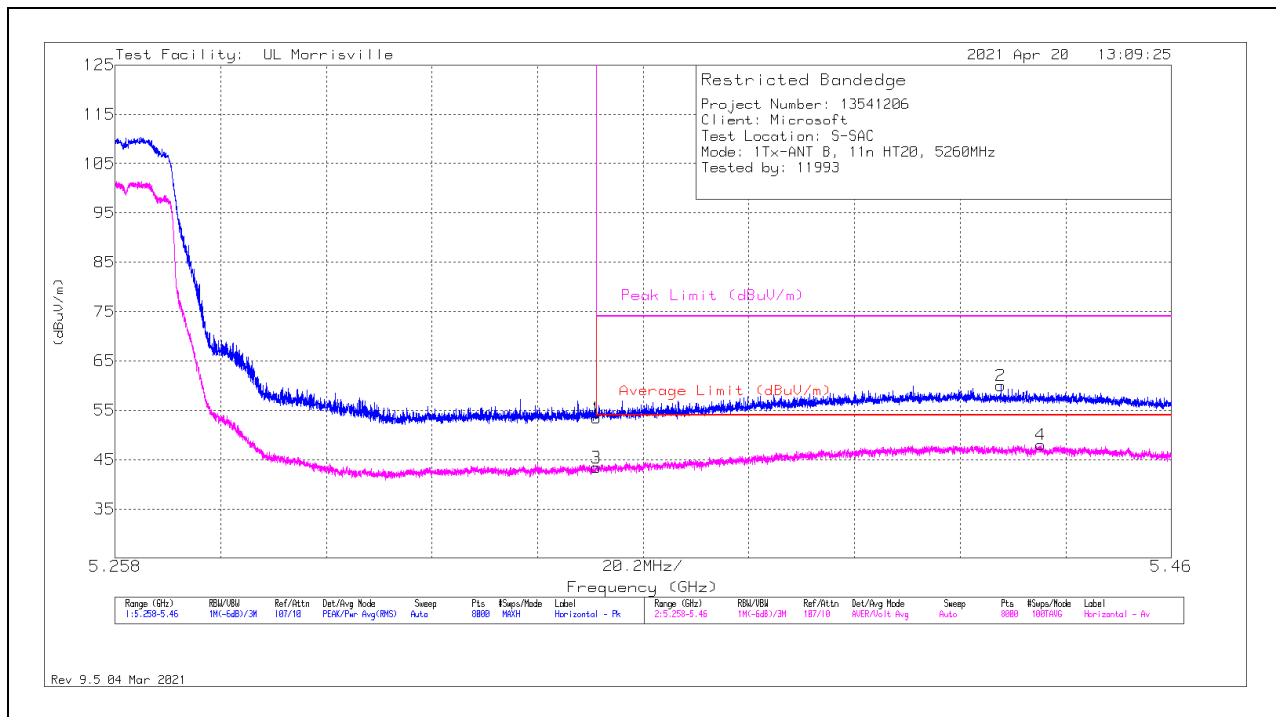

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	42.07	Pk	34.5	-23.2	53.37	-	-	74	-20.63	83	192	H
2	*** 5.42737	48.93	Pk	34.5	-23.4	60.03	-	-	74	-13.97	83	192	H
3	*** 5.35002	32.08	ADV	34.5	-23.2	43.38	54	-10.62	-	-	83	192	H
4	*** 5.43502	36.94	ADV	34.5	-23.4	48.04	54	-5.96	-	-	83	192	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

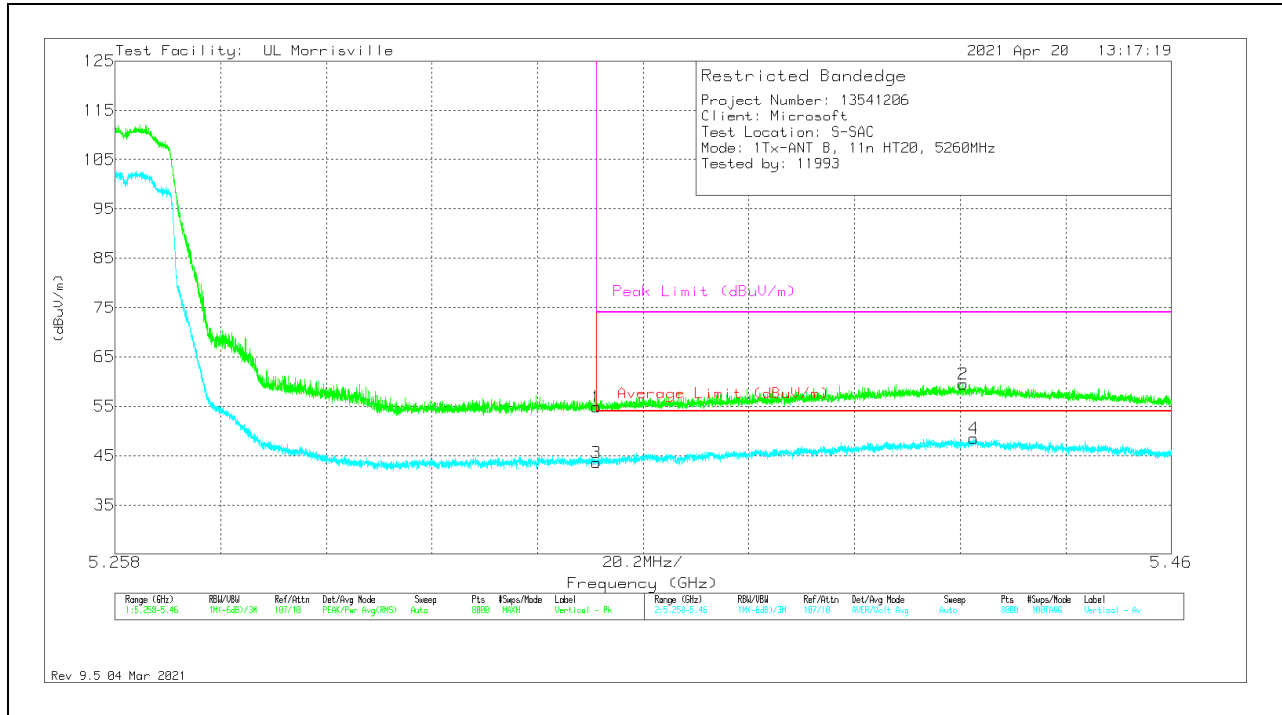


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	43.63	Pk	34.5	-23.2	54.93	-	-	74	-19.07	40	217	V
2	* ** 5.42012	48.42	Pk	34.5	-23.4	59.52	-	-	74	-14.48	40	217	V
3	* ** 5.35002	32.31	ADV	34.5	-23.2	43.61	54	-10.39	-	-	40	217	V
4	* ** 5.42217	37.36	ADV	34.5	-23.4	48.46	54	-5.54	-	-	40	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B SDM MODE

BANDEDGE (HIGH CHANNEL 64)

HORIZONTAL RESULT

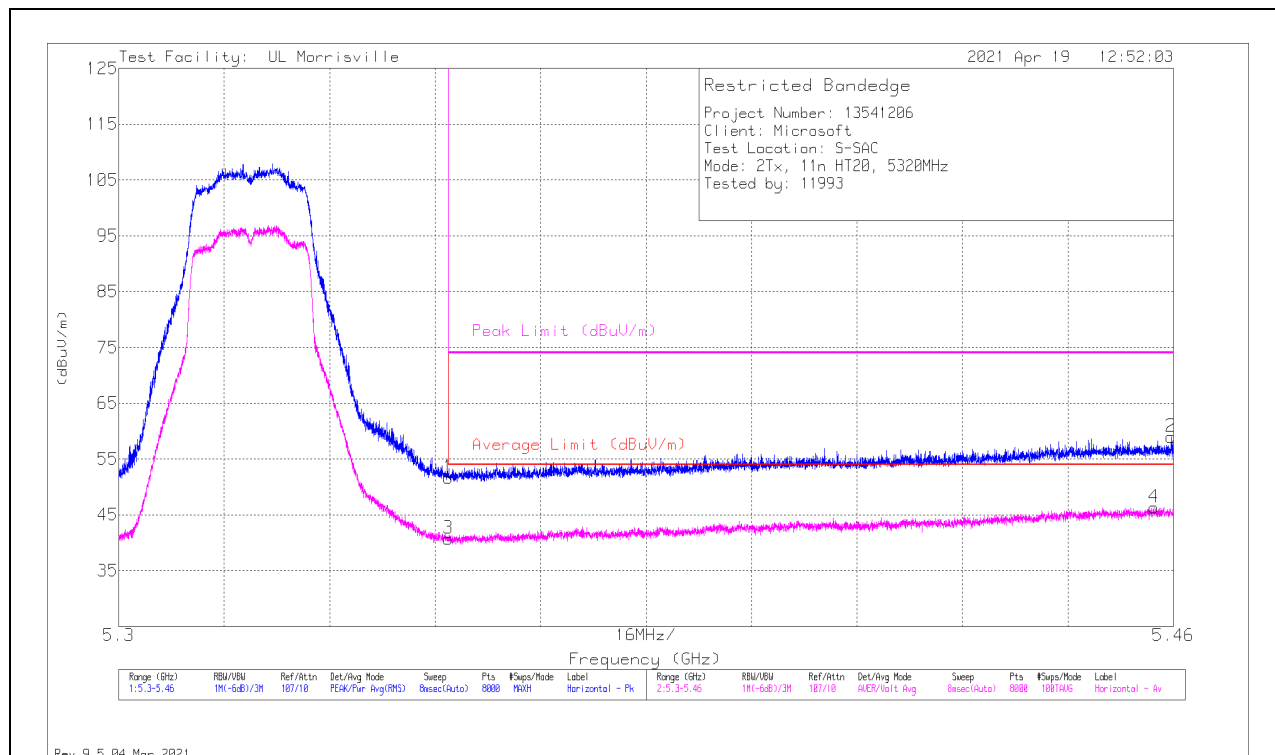

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	40.33	Pk	34.5	-23.2	51.63	-	-	74	-22.37	30	159	H
2	*** 5.45966	48.03	Pk	34.5	-23.5	59.03	-	-	74	-14.97	30	159	H
3	*** 5.35001	29.4	ADV	34.5	-23.2	40.7	54	-13.3	-	-	30	159	H
4	*** 5.45702	35.28	ADV	34.5	-23.5	46.28	54	-7.72	-	-	30	159	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

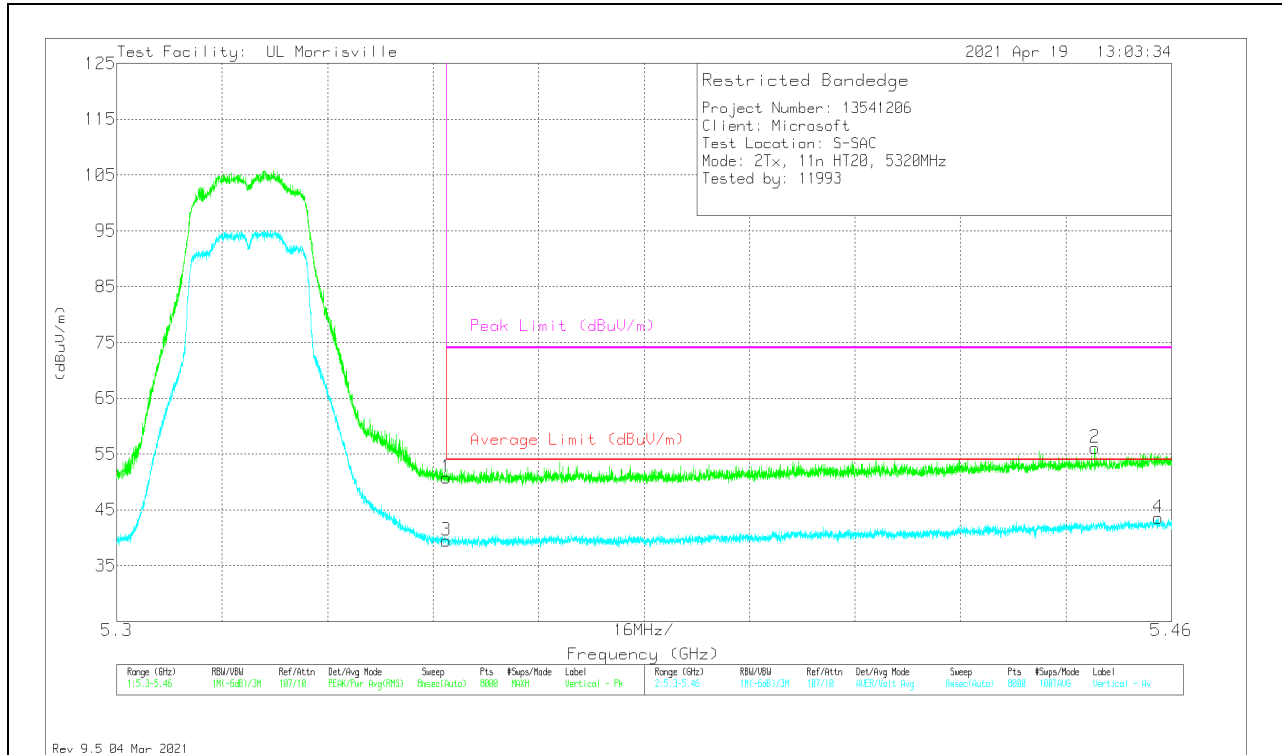


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	39.48	Pk	34.5	-23.2	50.78	-	-	74	-23.22	49	217	V
2	* ** 5.44836	45.08	Pk	34.5	-23.4	56.18	-	-	74	-17.82	49	217	V
3	* ** 5.35001	28.17	ADV	34.5	-23.2	39.47	54	-14.53	-	-	49	217	V
4	* ** 5.45802	32.6	ADV	34.5	-23.5	43.6	54	-10.4	-	-	49	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 60)


HORIZONTAL RESULT

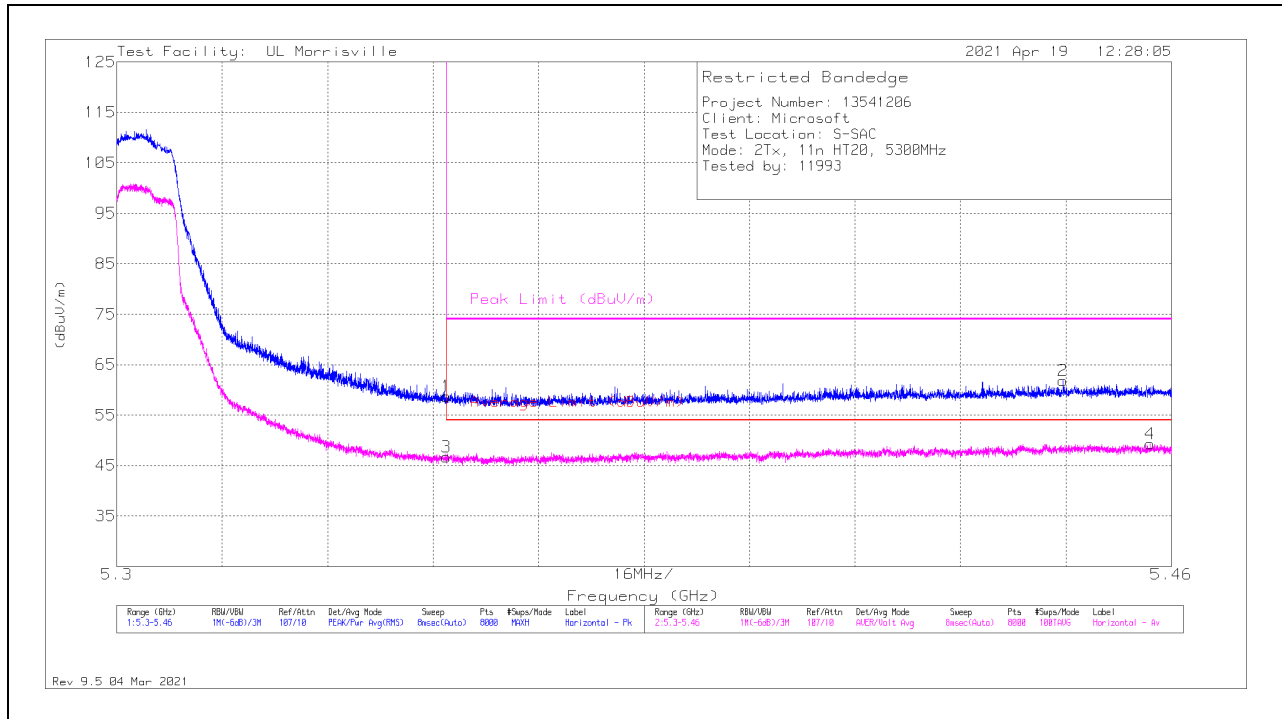

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	47.49	Pk	34.5	-23.2	58.79	-	-	74	-15.21	54	208	H
2	** * 5.44354	50.88	Pk	34.5	-23.5	61.88	-	-	74	-12.12	54	208	H
3	** * 5.35001	35.36	ADV	34.5	-23.2	46.66	54	-7.34	-	-	54	208	H
4	** * 5.45674	38.25	ADV	34.5	-23.5	49.25	54	-4.75	-	-	54	208	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

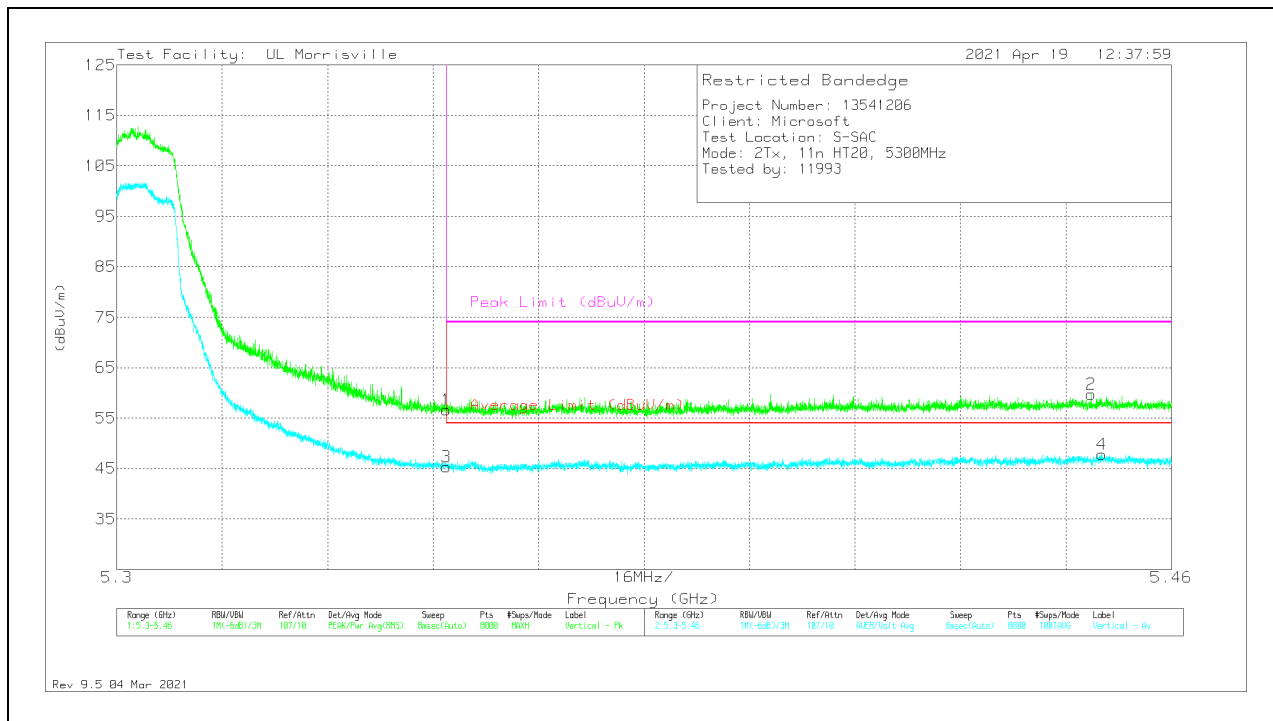

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	45.31	Pk	34.5	-23.2	56.61	-	-	74	-17.39	35	228	V
2	*** 5.44778	48.67	Pk	34.5	-23.4	59.77	-	-	74	-14.23	35	228	V
3	*** 5.35001	34.08	ADV	34.5	-23.2	45.38	54	-8.62	-	-	35	228	V
4	*** 5.44948	36.71	ADV	34.5	-23.4	47.81	54	-6.19	-	-	35	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

10.1.7. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX Antenna A MODE

BANDEDGE (HIGH CHANNEL 62)


HORIZONTAL RESULT

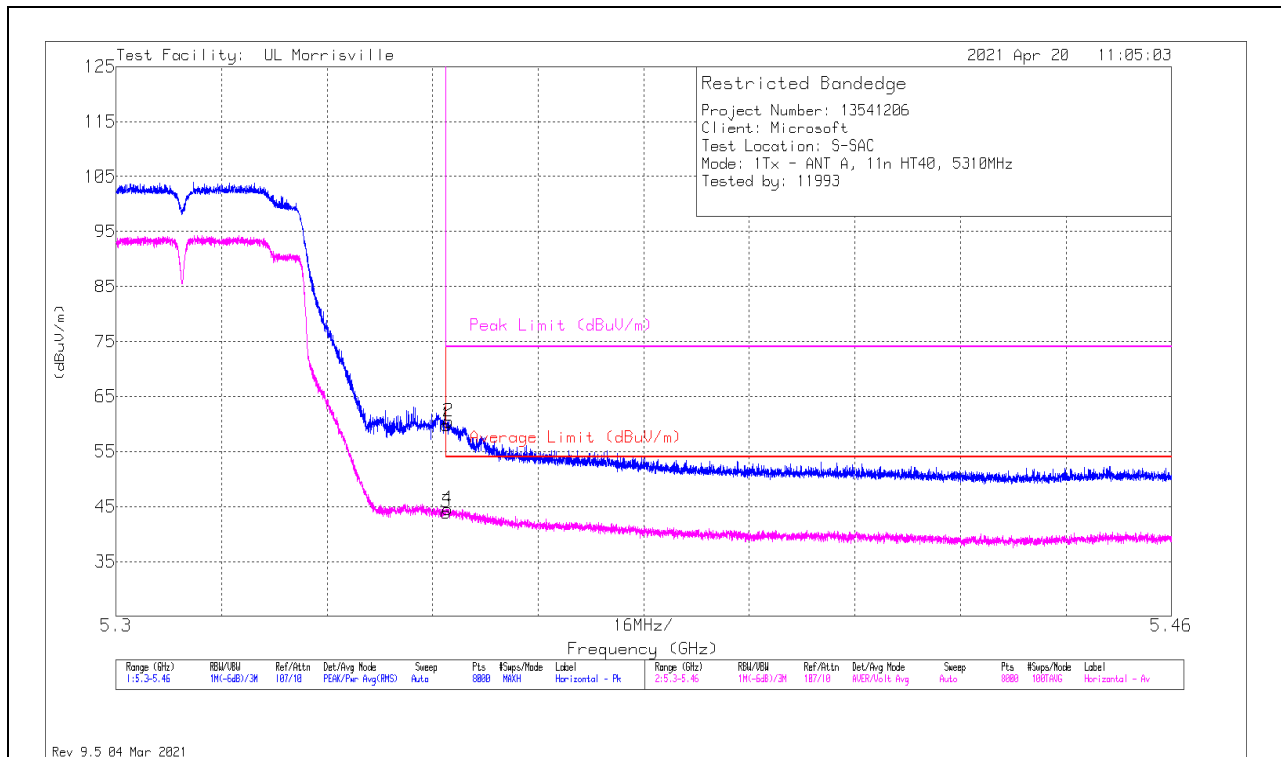

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	48.52	Pk	34.5	-23.2	59.82	-	-	74	-14.18	142	181	H
2	* ** 5.35039	49.18	Pk	34.5	-23.2	60.48	-	-	74	-13.52	142	181	H
3	* ** 5.35001	32.67	ADV	34.5	-23.2	43.97	54	-10.03	-	-	142	181	H
4	* ** 5.35027	33.23	ADV	34.5	-23.2	44.53	54	-9.47	-	-	142	181	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

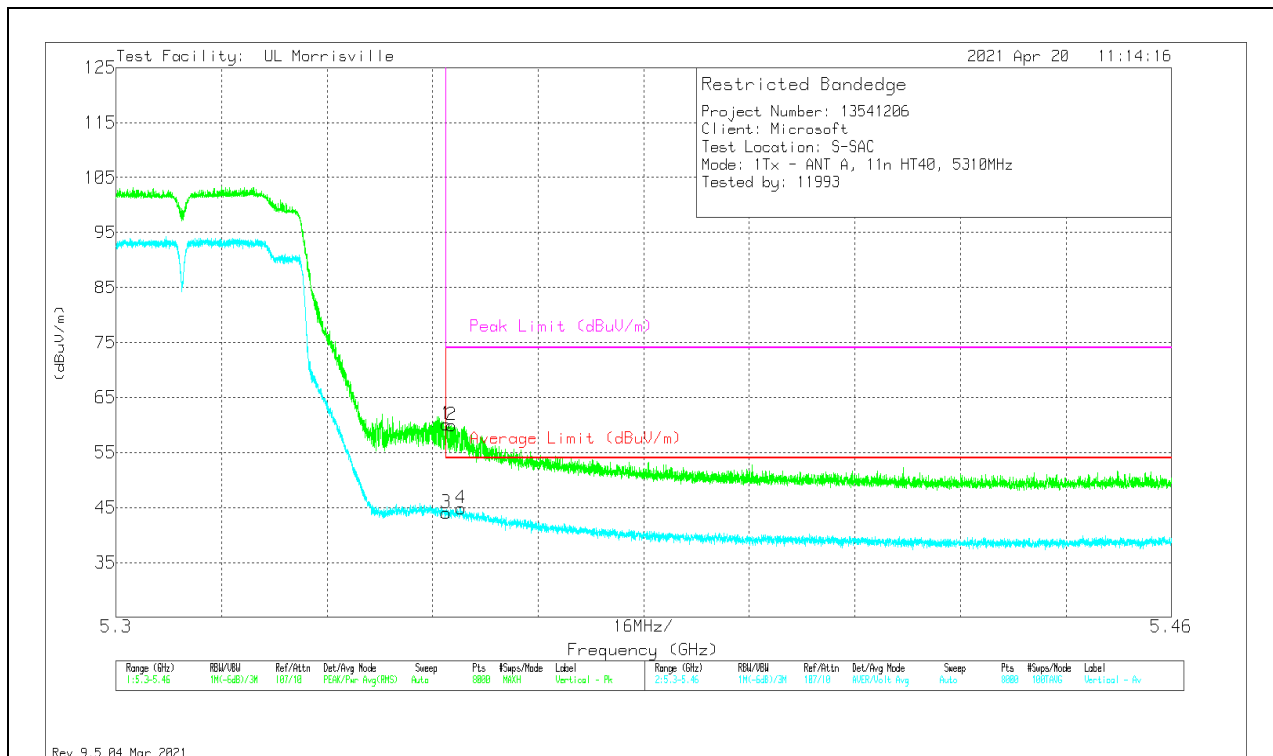


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	48.82	Pk	34.5	-23.2	60.12	-	-	74	-13.88	183	234	V
2	* ** 5.35085	48.68	Pk	34.5	-23.2	59.98	-	-	74	-14.02	183	234	V
3	* ** 5.35001	32.71	ADV	34.5	-23.2	44.01	54	-9.99	-	-	183	234	V
4	* ** 5.35227	33.55	ADV	34.5	-23.2	44.85	54	-9.15	-	-	183	234	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 54)


HORIZONTAL RESULT

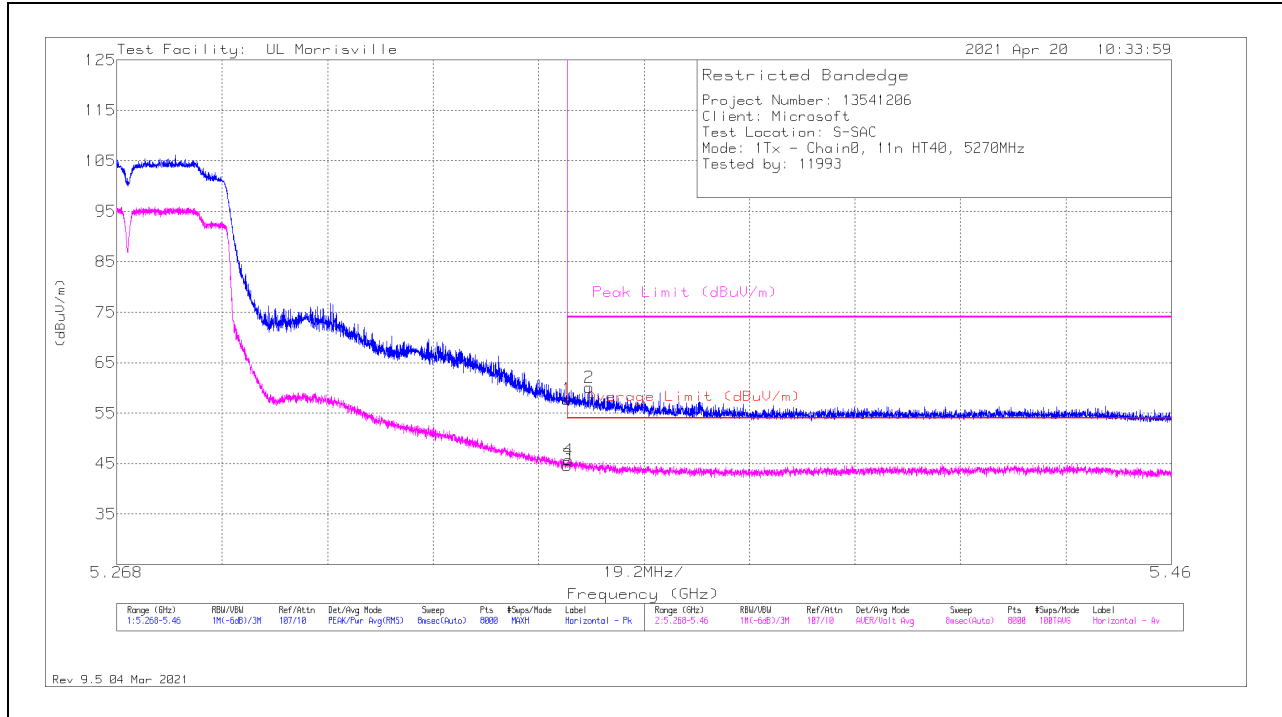

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	46.5	PK	34.5	-23.2	57.8	-	-	74	-16.2	184	118	H
2	*** 5.35395	48.83	Pk	34.5	-23.2	60.13	-	-	74	-13.87	184	118	H
3	*** 5.35002	33.34	ADV	34.5	-23.2	44.64	54	-9.36	-	-	184	118	H
4	*** 5.35026	34.35	ADV	34.5	-23.2	45.65	54	-8.35	-	-	184	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

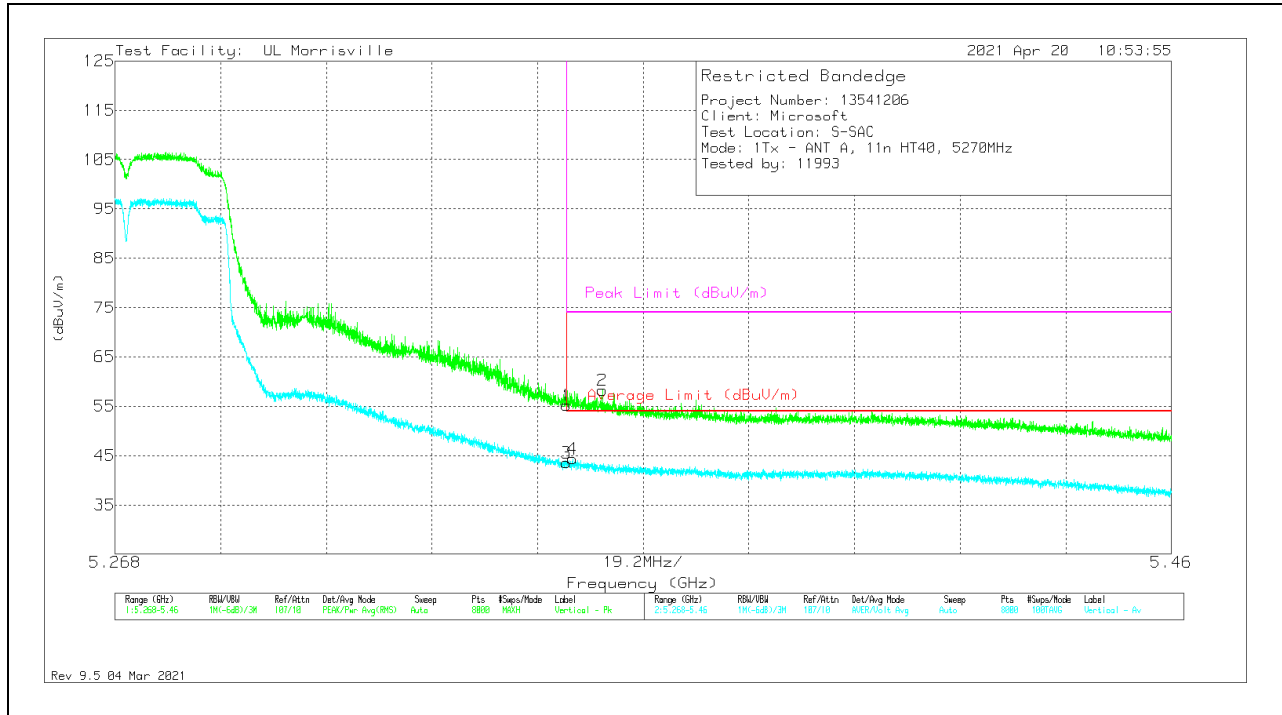


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	43.97	Pk	34.5	-23.2	55.27	-	-	74	-18.73	189	179	V
2	* ** 5.35657	46.98	Pk	34.5	-23.2	58.28	-	-	74	-15.72	189	179	V
3	* ** 5.35002	32.25	ADV	34.5	-23.2	43.55	54	-10.45	-	-	189	179	V
4	* ** 5.35115	33.04	ADV	34.5	-23.2	44.34	54	-9.66	-	-	189	179	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B MODE

BANDEDGE (HIGH CHANNEL 62)

HORIZONTAL RESULT

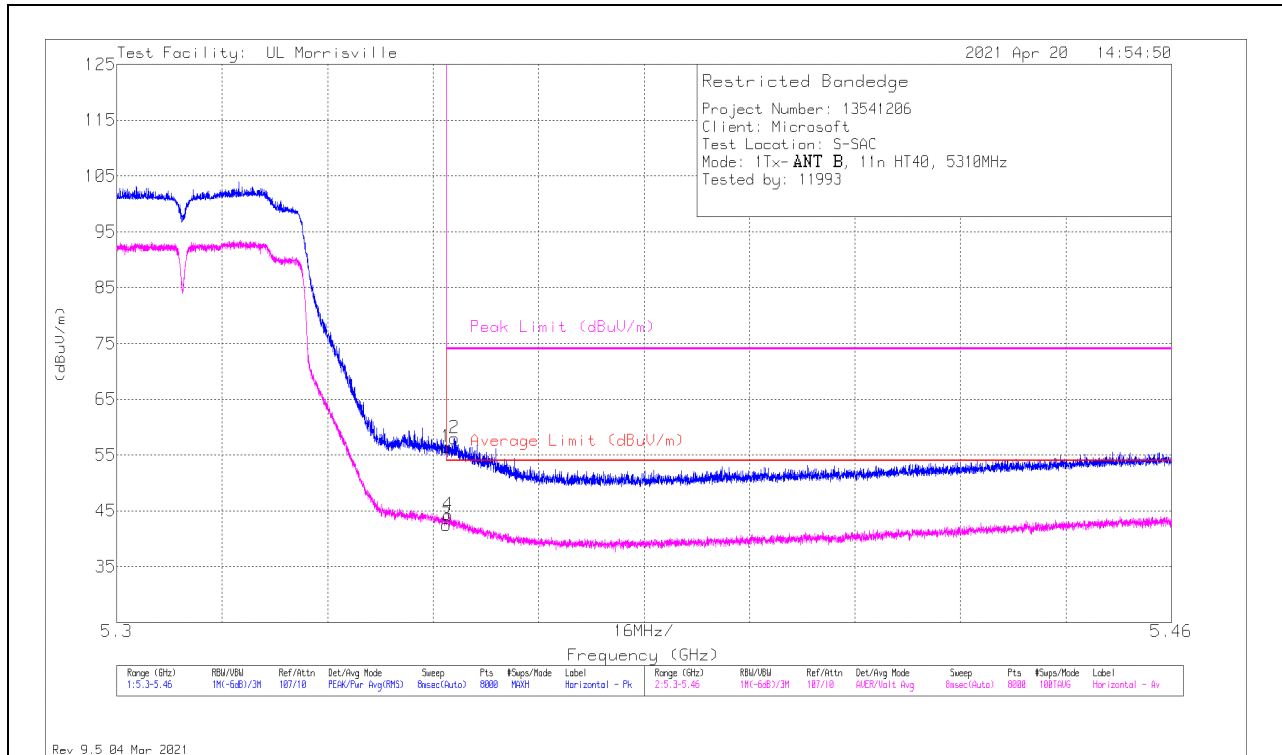

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	45.07	Pk	34.5	-23.2	56.37	-	-	74	-17.63	57	231	H
2	*** 5.35119	46.64	Pk	34.5	-23.2	57.94	-	-	74	-16.06	57	231	H
3	*** 5.35001	31.2	ADV	34.5	-23.2	42.5	54	-11.5	-	-	57	231	H
4	*** 5.35031	32.89	ADV	34.5	-23.2	44.19	54	-9.81	-	-	57	231	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

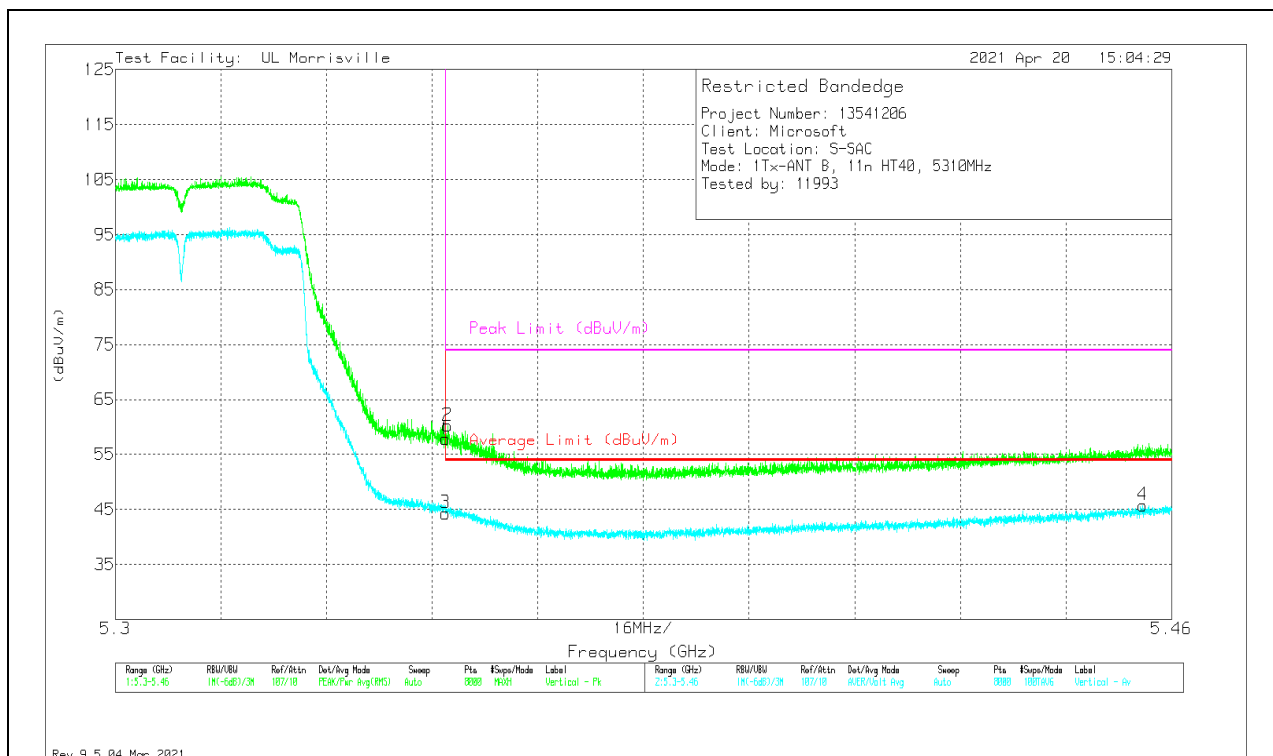


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	46.54	Pk	34.5	-23.2	57.84	-	-	74	-16.16	47	213	V
2	* ** 5.35033	48.95	Pk	34.5	-23.2	60.25	-	-	74	-13.75	47	213	V
3	* ** 5.35001	33.02	ADV	34.5	-23.2	44.32	54	-9.68	-	-	47	213	V
4	* ** 5.45564	34.75	ADV	34.5	-23.5	45.75	54	-8.25	-	-	47	213	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 54)


HORIZONTAL RESULT

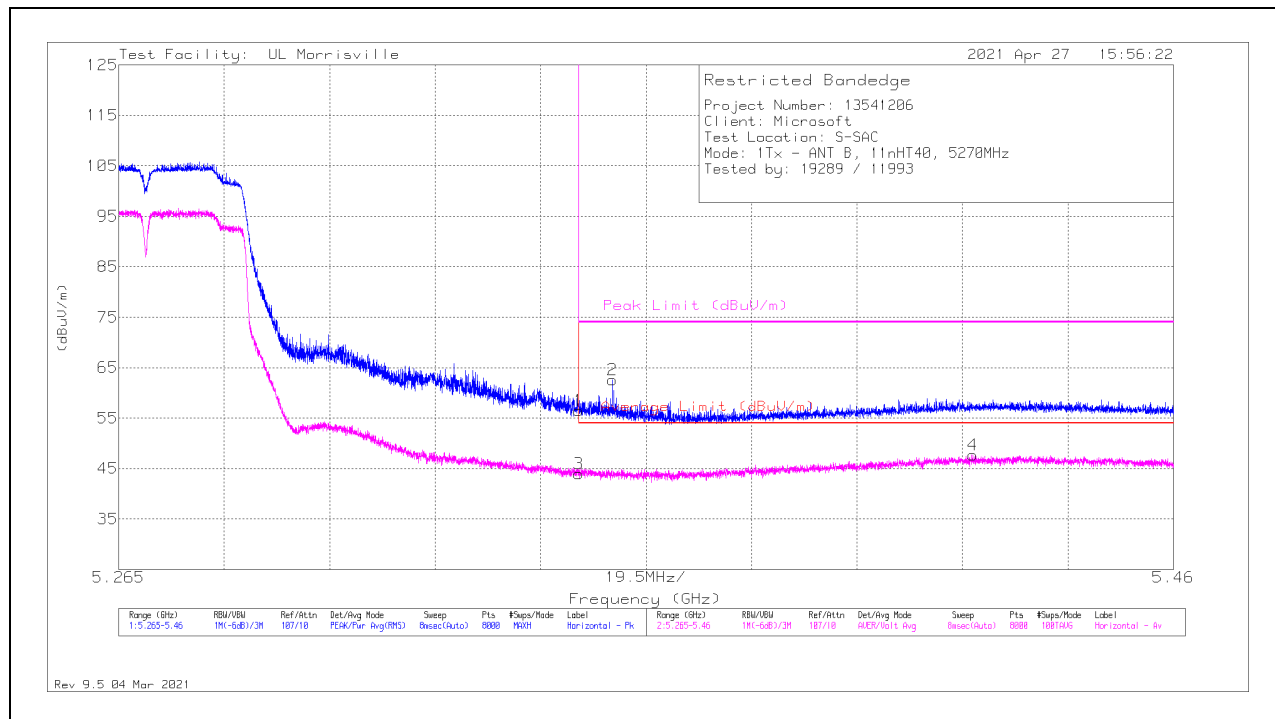

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	45.15	Pk	34.5	-23.2	56.45	-	-	74	-17.55	75	221	H
2	*** 5.35627	51.24	Pk	34.5	-23.2	62.54	-	-	74	-11.46	75	221	H
3	*** 5.35001	32.69	ADV	34.5	-23.2	43.99	54	-10.01	-	-	75	220	H
4	*** 5.42292	36.48	ADV	34.6	-23.4	47.68	54	-6.32	-	-	75	220	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

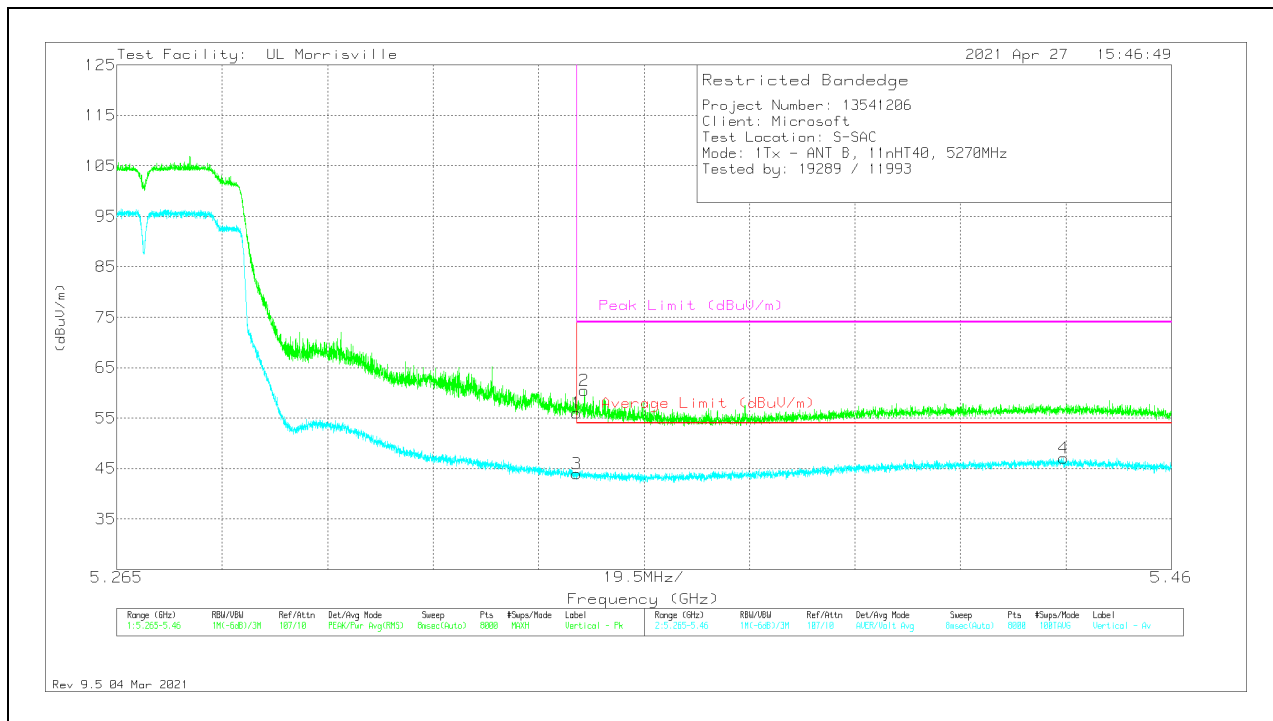

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	44.72	Pk	34.5	-23.2	56.02	-	-	74	-17.98	52	205	V
2	*** 5.35142	49.2	Pk	34.5	-23.2	60.5	-	-	74	-13.5	52	205	V
3	*** 5.35001	32.61	ADV	34.5	-23.2	43.91	54	-10.09	-	-	52	205	V
4	*** 5.44003	35.99	ADV	34.6	-23.5	47.09	54	-6.91	-	-	52	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B SDM MODE

BANDEDGE (HIGH CHANNEL 62)

HORIZONTAL RESULT

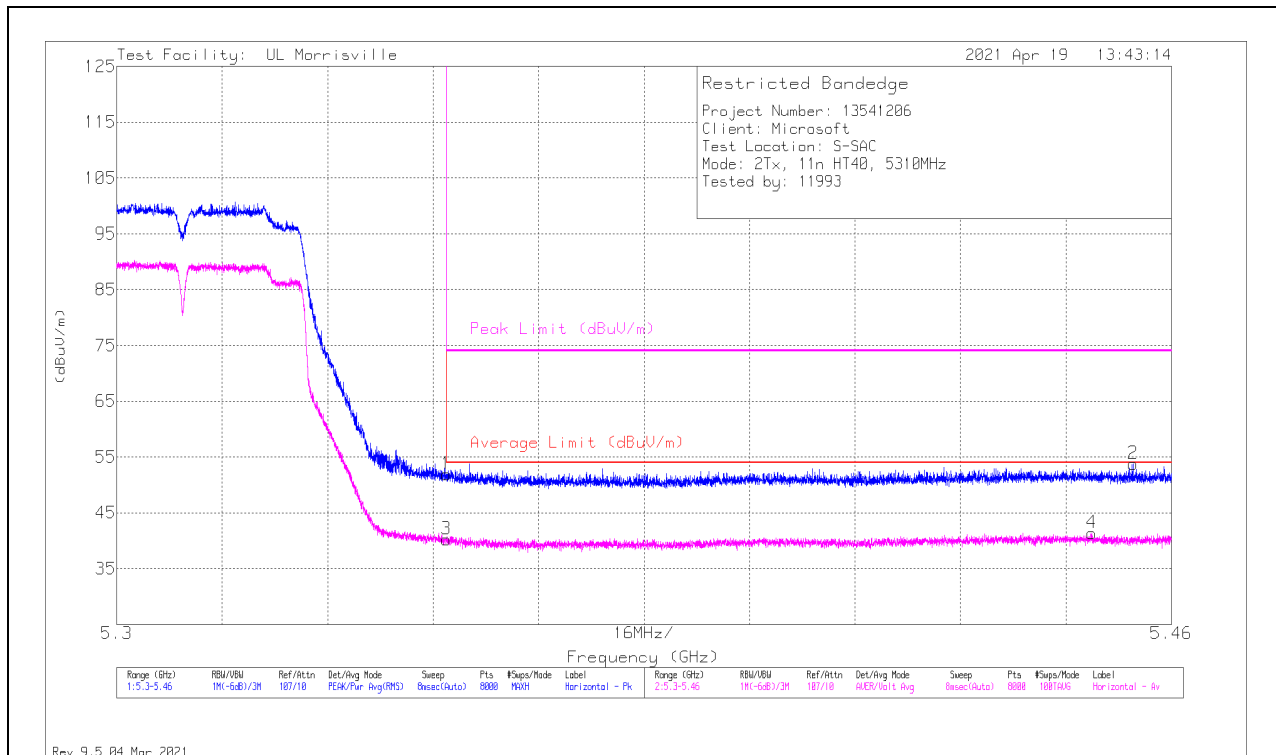

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	40.6	Pk	34.5	-23.2	51.9	-	-	74	-22.1	72	341	H
2	*** 5.45416	42.72	Pk	34.5	-23.4	53.82	-	-	74	-20.18	72	341	H
3	*** 5.35001	28.9	ADV	34.5	-23.2	40.2	54	-13.8	-	-	72	340	H
4	*** 5.44788	30.27	ADV	34.5	-23.4	41.37	54	-12.63	-	-	72	340	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

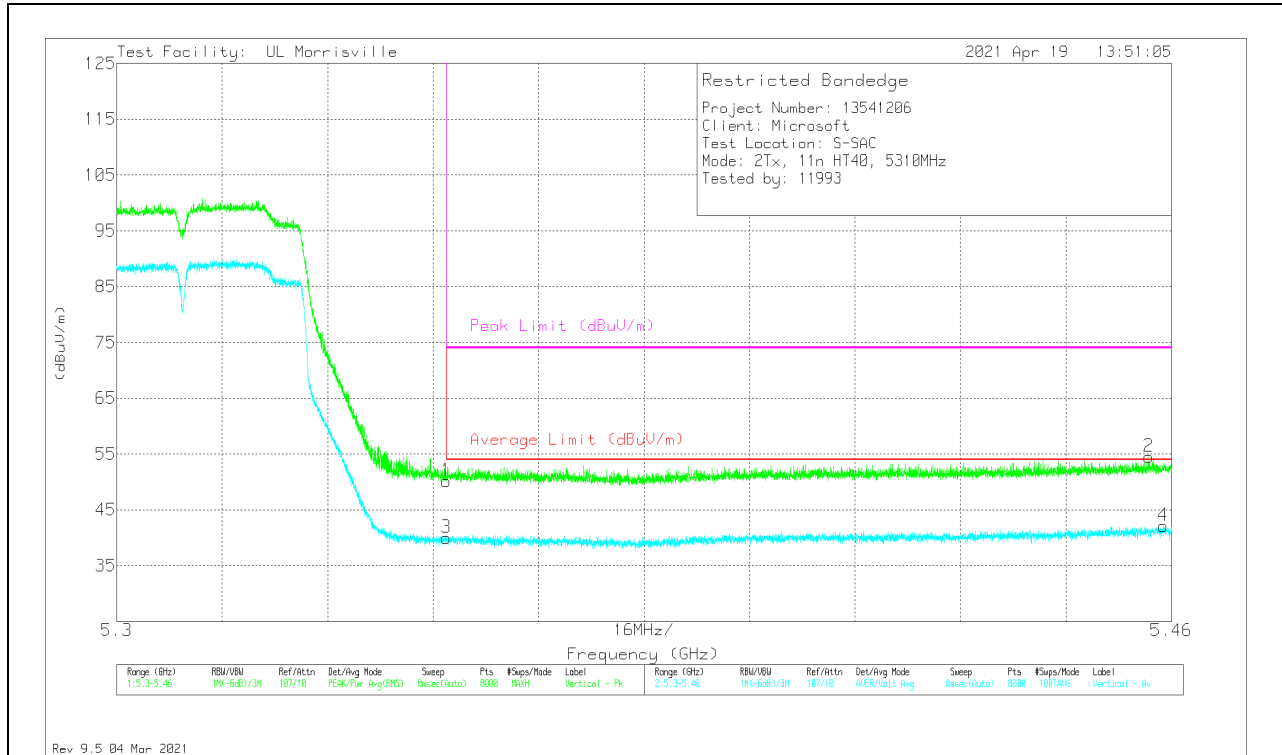


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	38.86	Pk	34.5	-23.2	50.16	-	-	74	-23.84	35	299	V
2	* ** 5.45658	43.52	Pk	34.5	-23.5	54.52	-	-	74	-19.48	35	299	V
3	* ** 5.35001	28.74	ADV	34.5	-23.2	40.04	54	-13.96	-	-	35	299	V
4	* ** 5.45876	31.05	ADV	34.5	-23.5	42.05	54	-11.95	-	-	35	299	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL 54)


HORIZONTAL RESULT

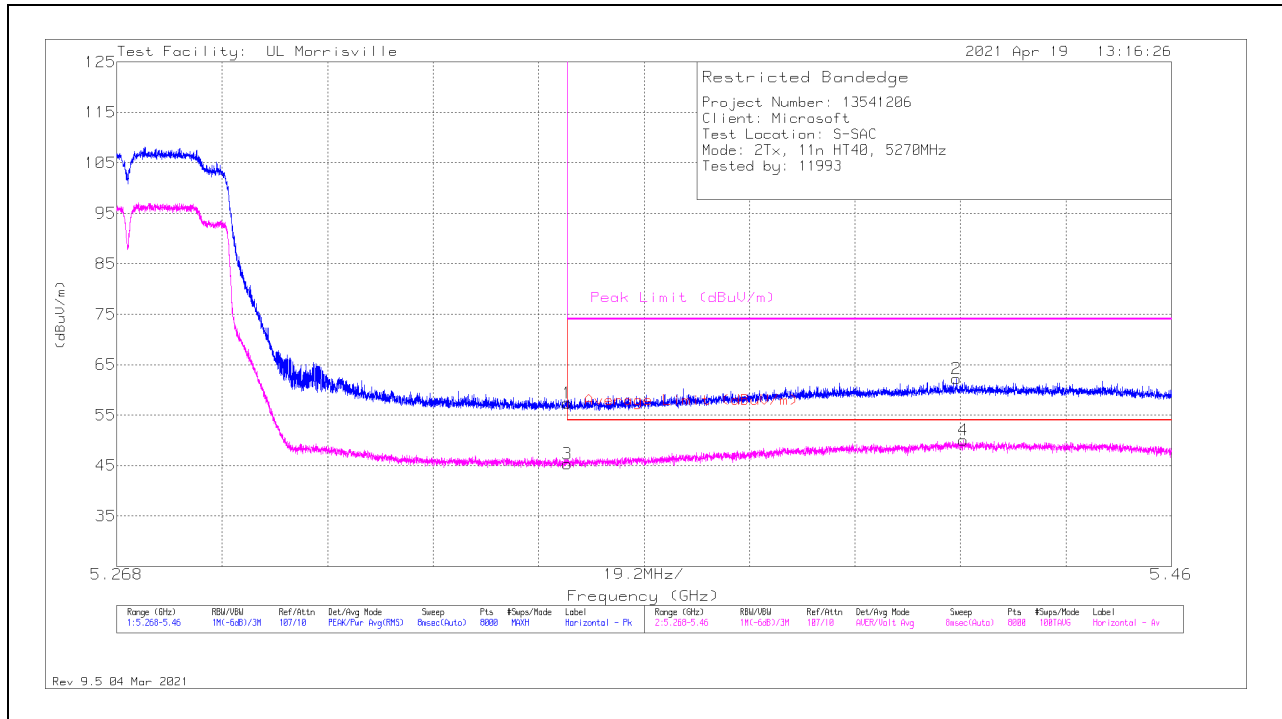

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	46.1	PK	34.5	-23.2	57.4	-	-	74	-16.6	30	243	H
2	*** 5.4209	51.06	PK	34.5	-23.4	62.16	-	-	74	-11.84	30	243	H
3	*** 5.35002	34.03	ADV	34.5	-23.2	45.33	54	-8.67	-	-	30	243	H
4	*** 5.42215	38.98	ADV	34.5	-23.4	50.08	54	-3.92	-	-	30	243	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

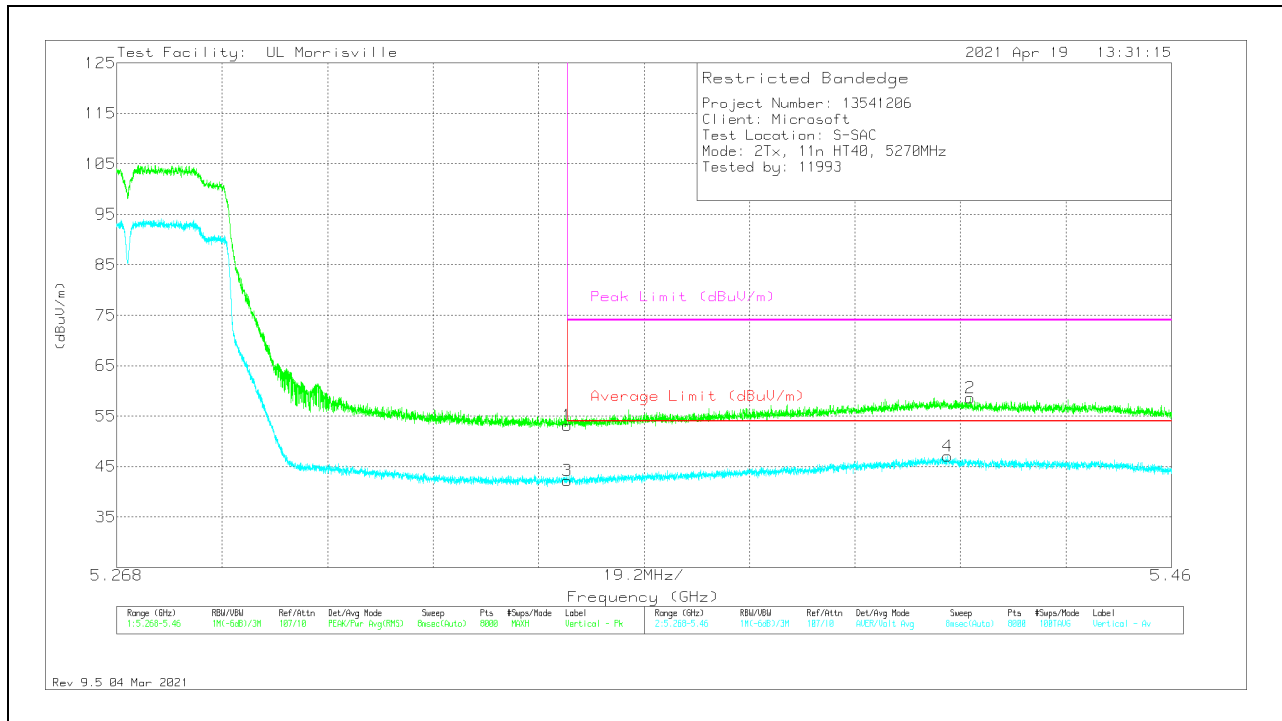

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	41.89	Pk	34.5	-23.2	53.19	-	-	74	-20.81	306	267	V
2	*** 5.42335	47.49	Pk	34.5	-23.4	58.59	-	-	74	-15.41	306	267	V
3	*** 5.35002	30.93	ADV	34.5	-23.2	42.23	54	-11.77	-	-	306	266	V
4	*** 5.41924	35.97	ADV	34.5	-23.4	47.07	54	-6.93	-	-	306	266	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

10.1.8. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX Antenna A MODE

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

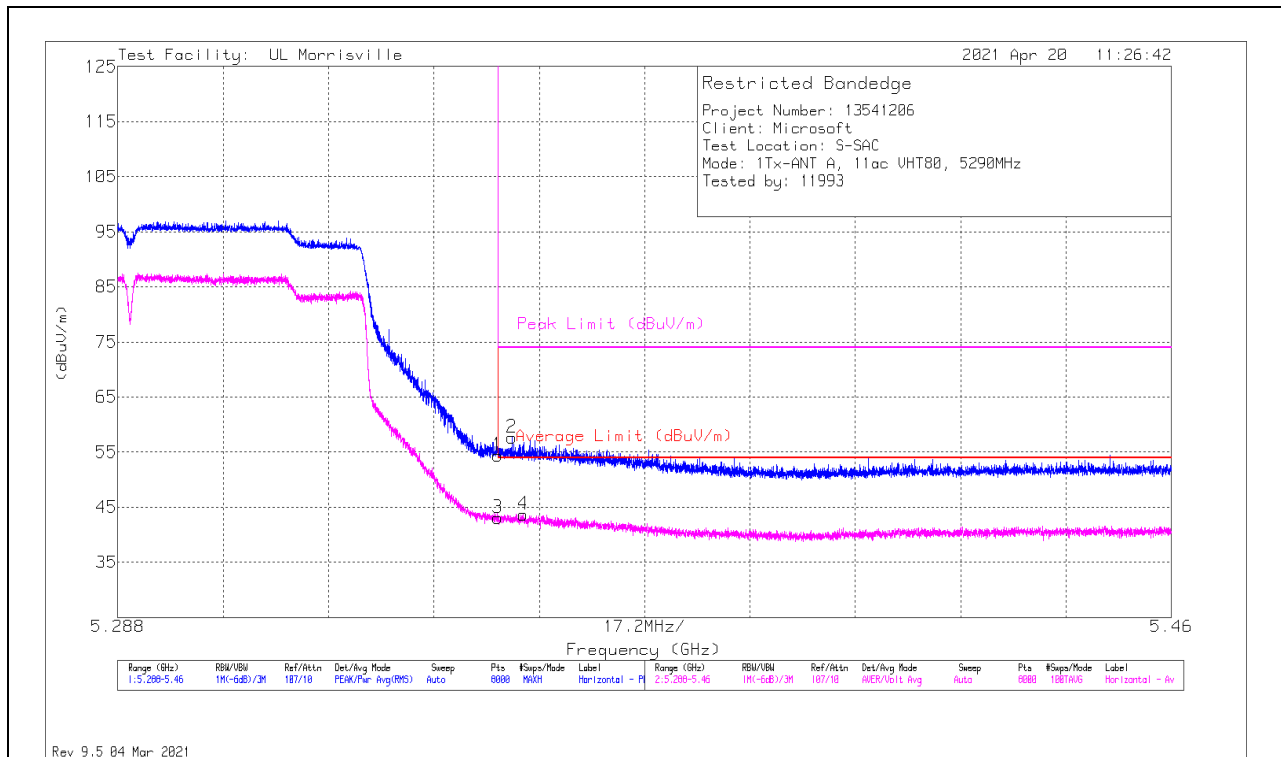

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.09	Pk	34.5	-23.2	54.39	-	-	74	-19.61	214	175	H
2	* ** 5.35232	46.33	Pk	34.5	-23.2	57.63	-	-	74	-16.37	214	175	H
3	* ** 5.35001	31.74	ADV	34.5	-23.2	43.04	54	-10.96	-	-	214	174	H
4	* ** 5.35419	32.41	ADV	34.5	-23.2	43.71	54	-10.29	-	-	214	174	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

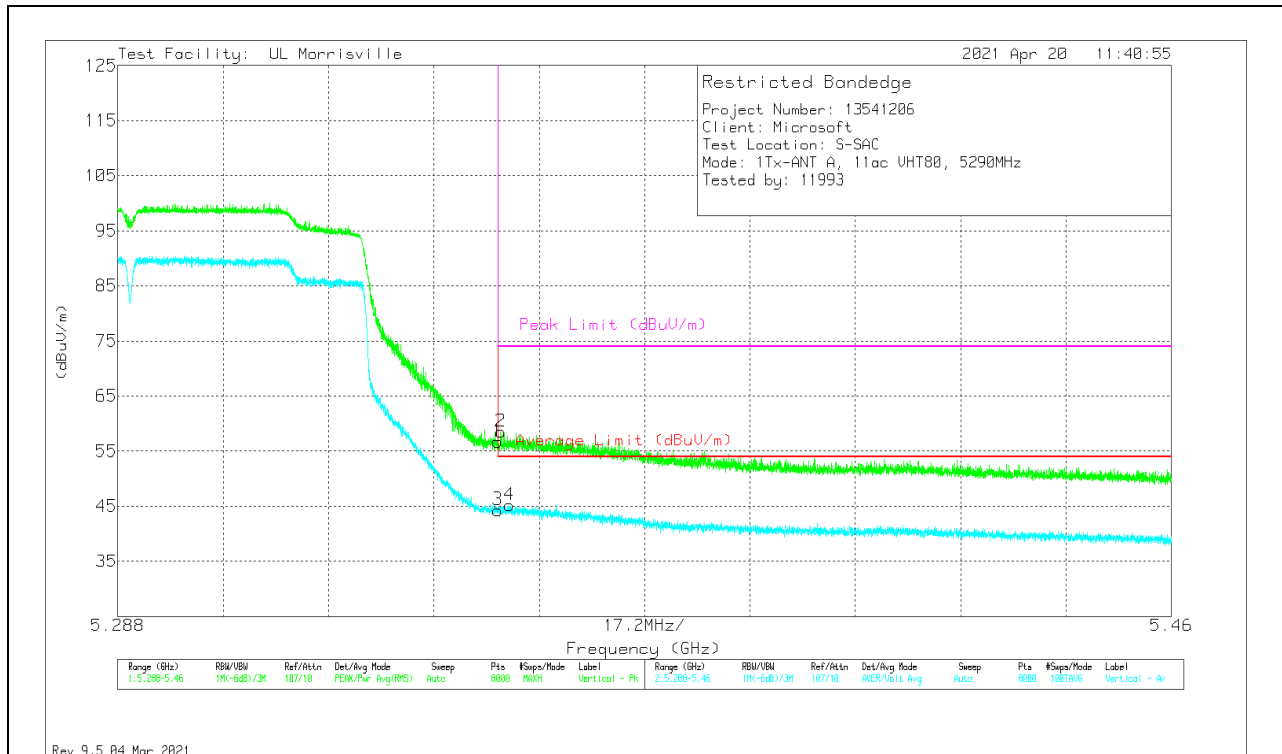


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.44	Pk	34.5	-23.2	56.74	-	-	74	-17.26	186	169	V
2	* ** 5.35051	47.18	Pk	34.5	-23.2	58.48	-	-	74	-15.52	186	169	V
3	* ** 5.35001	32.96	ADV	34.5	-23.2	44.26	54	-9.74	-	-	186	169	V
4	* ** 5.35193	33.89	ADV	34.5	-23.2	45.19	54	-8.81	-	-	186	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

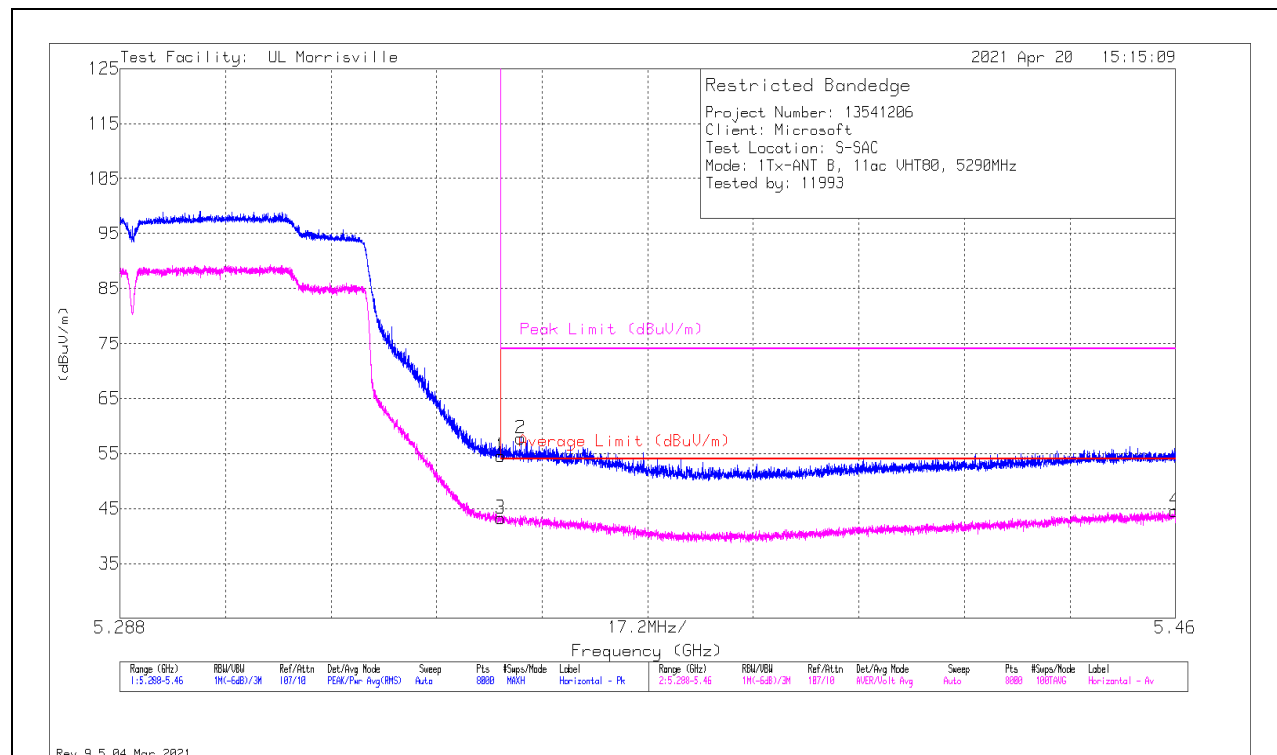

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	43.33	Pk	34.5	-23.2	54.63	-	-	74	-19.37	60	213	H
2	*** 5.3533	46.48	Pk	34.5	-23.2	57.78	-	-	74	-16.22	60	213	H
3	*** 5.35001	31.72	ADV	34.5	-23.2	43.02	54	-10.98	-	-	60	213	H
4	*** 5.45983	33.4	ADV	34.5	-23.5	44.40	54	-9.60	-	-	60	213	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

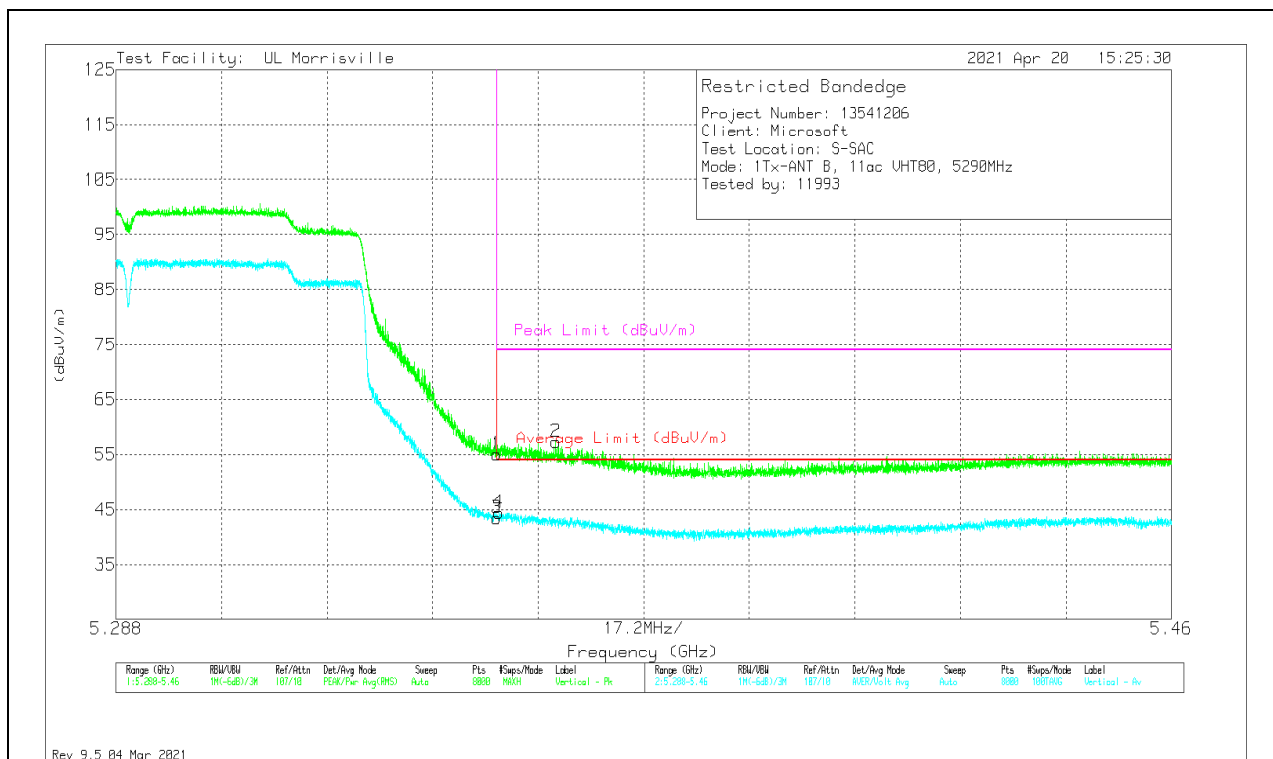

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	43.75	Pk	34.5	-23.2	55.05	-	-	74	-18.95	47	230	V
2	*** 5.35965	46	Pk	34.5	-23.2	57.3	-	-	74	-16.7	47	230	V
3	*** 5.35001	31.99	ADV	34.5	-23.2	43.29	54	-10.71	-	-	47	230	V
4	*** 5.35036	32.96	ADV	34.5	-23.2	44.26	54	-9.74	-	-	47	230	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B SDM MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

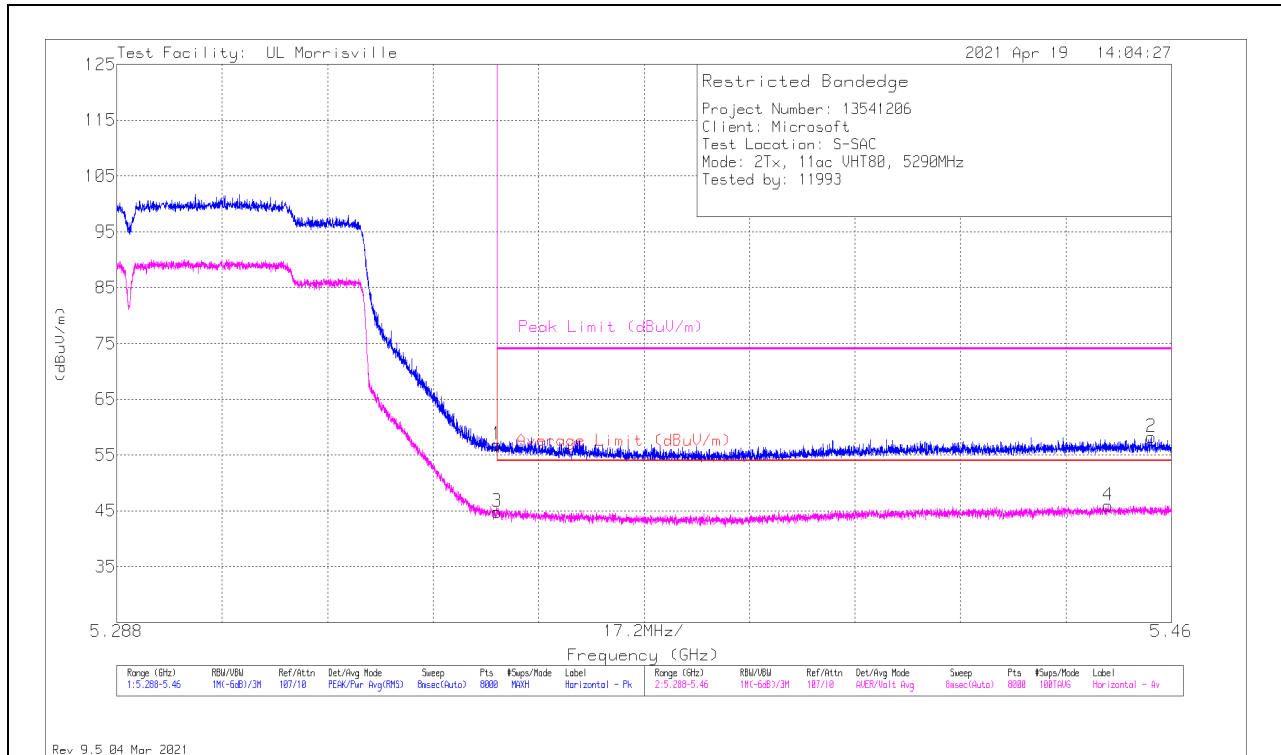

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.54	Pk	34.5	-23.2	56.84	-	-	74	-17.16	43	296	H
2	* ** 5.45673	47.26	Pk	34.5	-23.5	58.26	-	-	74	-15.74	43	296	H
3	* ** 5.35001	33.34	ADV	34.5	-23.2	44.64	54	-9.36	-	-	43	296	H
4	* ** 5.44968	34.7	ADV	34.5	-23.4	45.80	54	-8.20	-	-	43	296	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

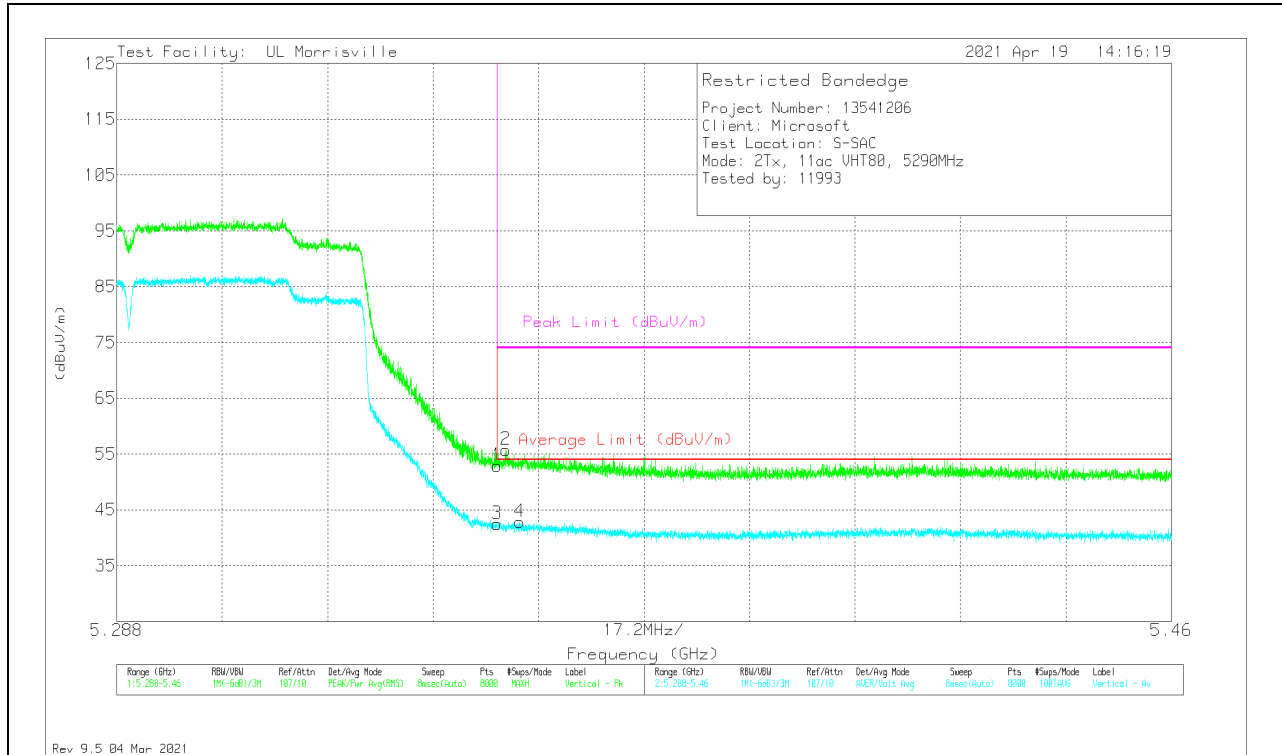

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	41.65	Pk	34.5	-23.2	52.95	-	-	74	-21.05	122	257	V
2	* ** 5.3515	44.43	Pk	34.5	-23.2	55.73	-	-	74	-18.27	122	257	V
3	* ** 5.35001	31.02	ADV	34.5	-23.2	42.32	54	-11.68	-	-	122	256	V
4	* ** 5.35367	31.39	ADV	34.5	-23.2	42.69	54	-11.31	-	-	122	256	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

10.1.9. TX ABOVE 1 GHz 802.11ac VHT160 MODE IN THE 5.2 & 5.3 GHz BAND

1TX Antenna A MODE

LOW BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

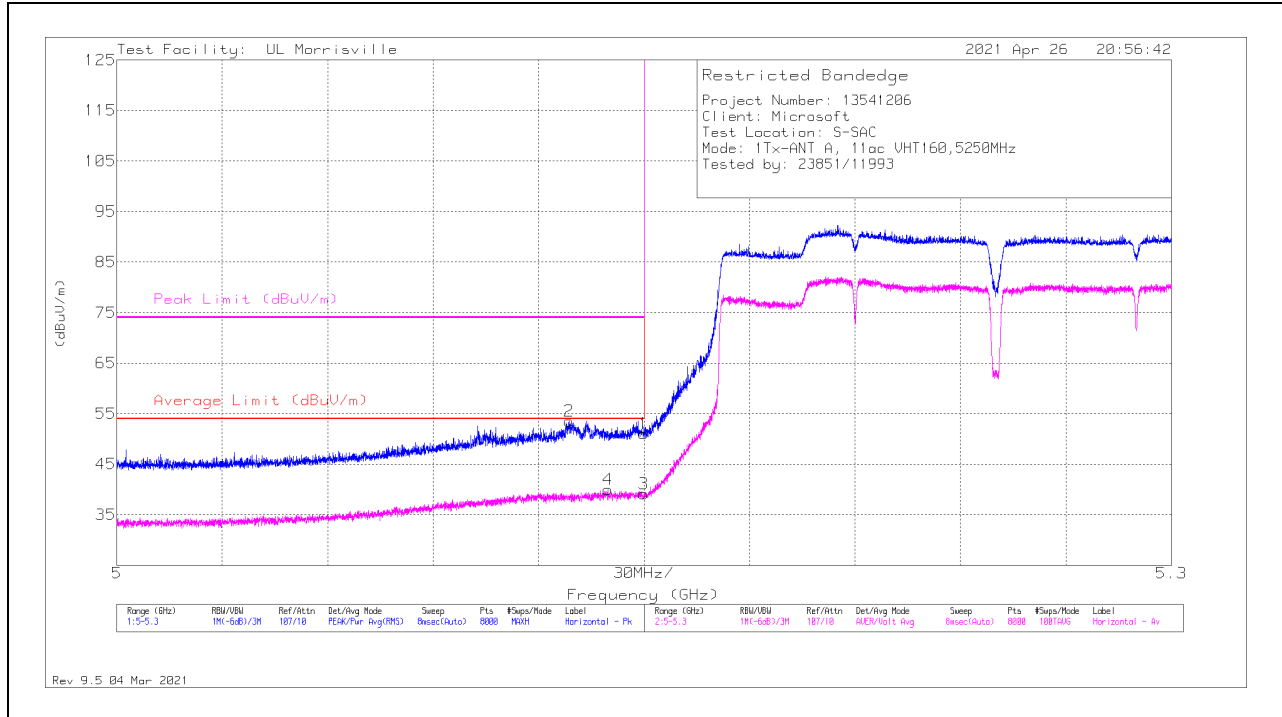

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	39.25	Pk	34.2	-22.4	51.05	-	-	74	-22.95	21	252	H
2	* ** 5.12868	41.97	Pk	34.1	-22.5	53.57	-	-	74	-20.43	21	252	H
3	* ** 5.14998	27.31	ADV	34.2	-22.4	39.11	54	-14.89	-	-	21	252	H
4	* ** 5.13974	28.35	ADV	34.1	-22.5	39.95	54	-14.05	-	-	21	252	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

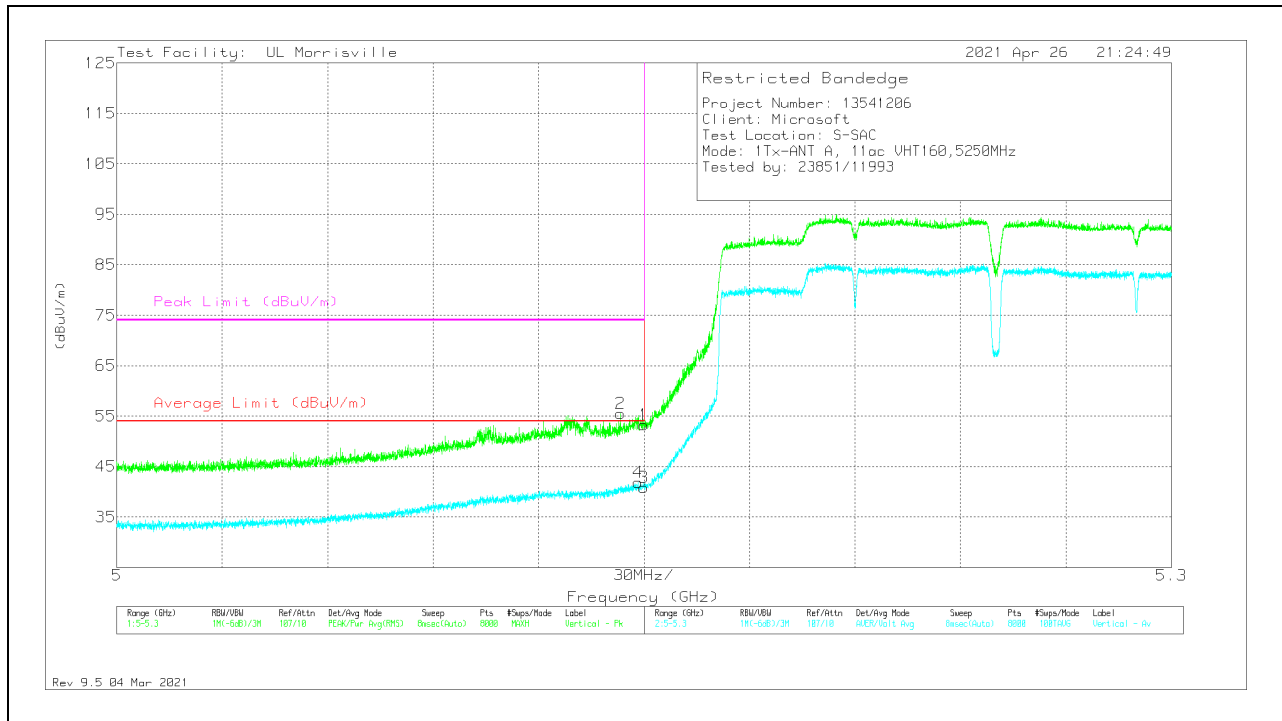


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	41.42	Pk	34.2	-22.4	53.22	-	-	74	-20.78	35	256	V
2	*** 5.14327	43.9	Pk	34.1	-22.5	55.5	-	-	74	-18.5	35	256	V
3	*** 5.14998	29.05	ADV	34.2	-22.4	40.85	54	-13.15	-	-	35	255	V
4	*** 5.14829	30.04	ADV	34.2	-22.4	41.84	54	-12.16	-	-	35	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

HIGH BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

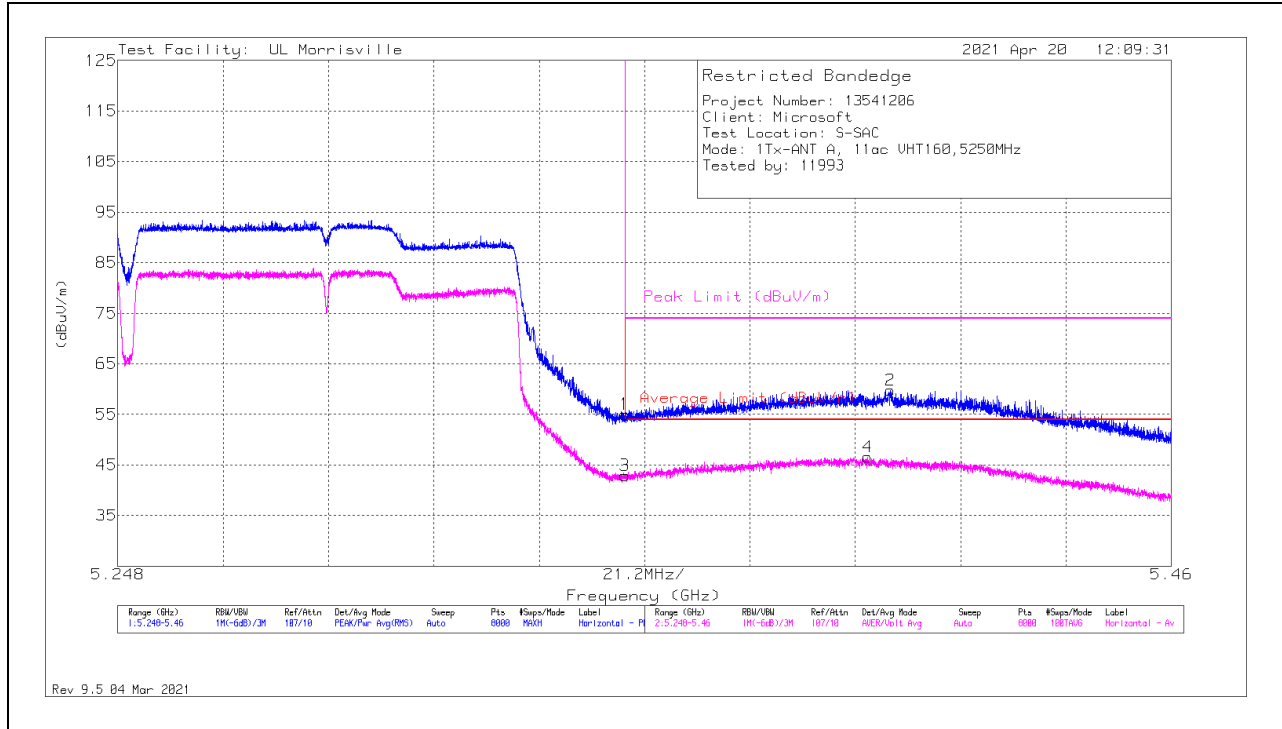

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.74	Pk	34.5	-23.2	55.04	-	-	74	-18.96	193	156	H
2	* ** 5.40344	48.54	Pk	34.5	-23.3	59.74	-	-	74	-14.26	193	156	H
3	* ** 5.35001	31.59	ADV	34.5	-23.2	42.89	54	-11.11	-	-	193	156	H
4	* ** 5.39886	35.38	ADV	34.5	-23.3	46.58	54	-7.42	-	-	193	156	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

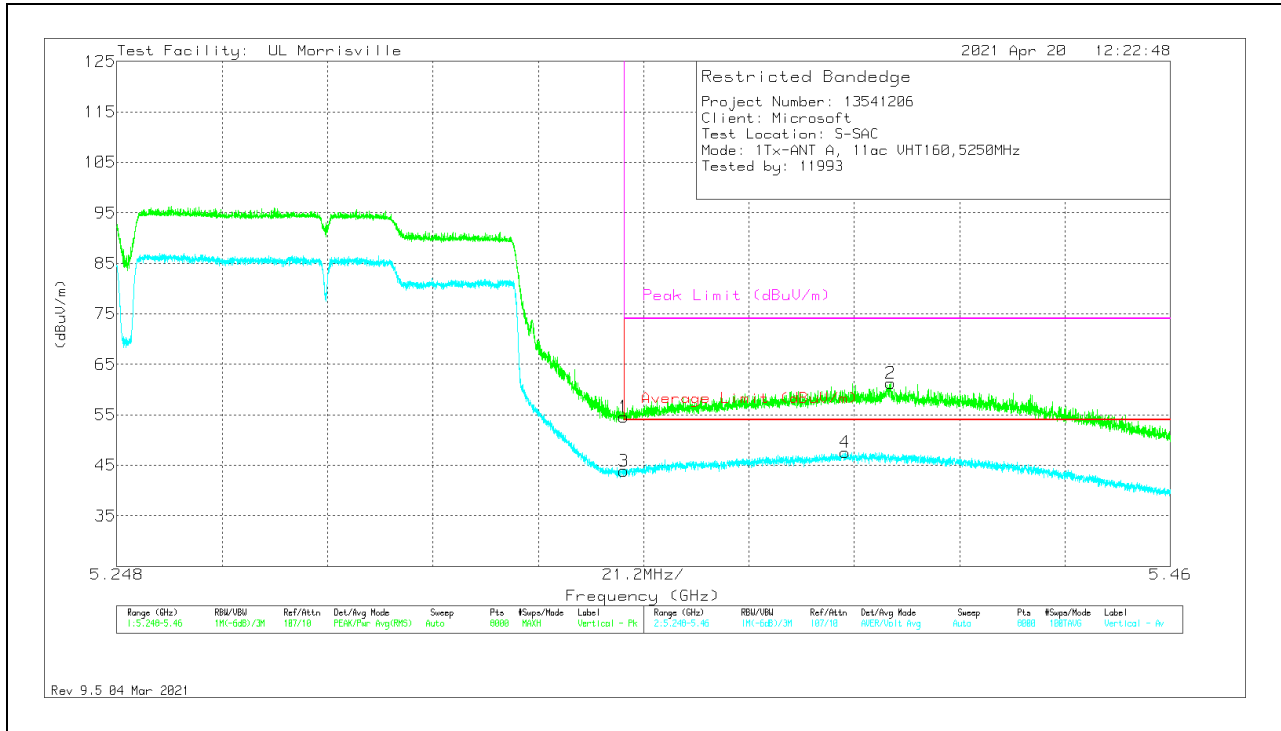


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.28	Pk	34.5	-23.2	54.58	-	-	74	-19.42	186	164	V
2	* ** 5.40373	50.1	Pk	34.5	-23.3	61.3	-	-	74	-12.7	186	164	V
3	* ** 5.35001	32.6	ADV	34.5	-23.2	43.9	54	-10.1	-	-	186	164	V
4	* ** 5.39454	36.37	ADV	34.5	-23.3	47.57	54	-6.43	-	-	186	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B MODE

LOW BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

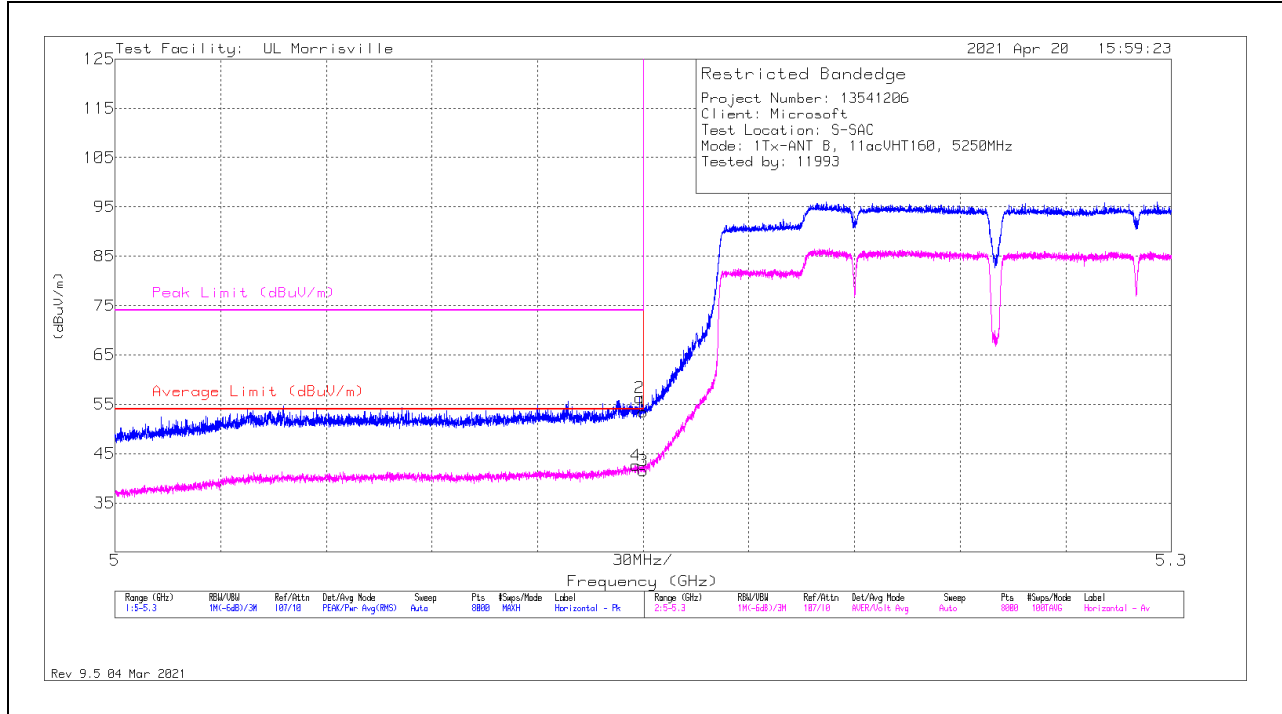

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	41.63	Pk	34.2	-22.4	53.43	-	-	74	-20.57	54	212	H
2	* ** 5.14897	44.54	Pk	34.2	-22.4	56.34	-	-	74	-17.66	54	212	H
3	* ** 5.14998	29.73	ADV	34.2	-22.4	41.53	54	-12.47	-	-	54	212	H
4	* ** 5.14781	30.82	ADV	34.2	-22.4	42.62	54	-11.38	-	-	54	212	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

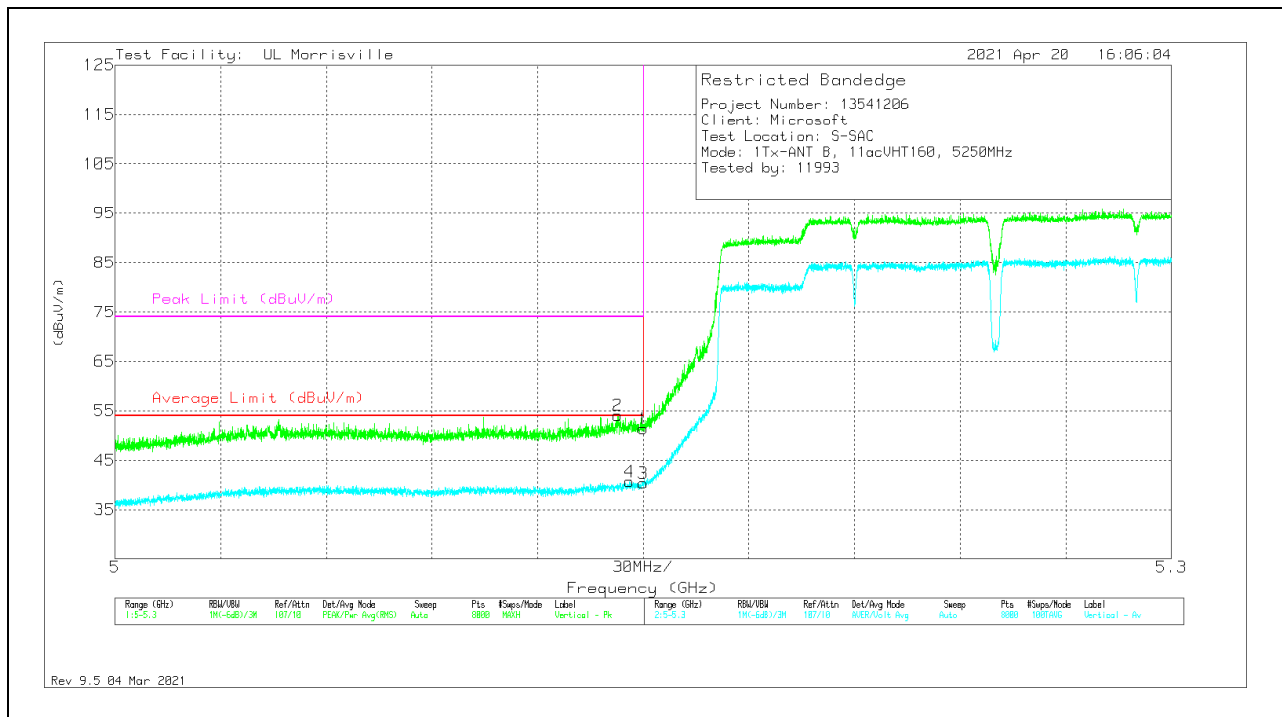

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	39.61	Pk	34.2	-22.4	51.41	-	-	74	-22.59	31	240	V
2	* ** 5.14274	42.55	Pk	34.1	-22.5	54.15	-	-	74	-19.85	31	240	V
3	* ** 5.14998	28.57	ADV	34.2	-22.4	40.37	54	-13.63	-	-	31	240	V
4	* ** 5.14604	28.97	ADV	34.1	-22.4	40.67	54	-13.33	-	-	31	240	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

HIGH BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

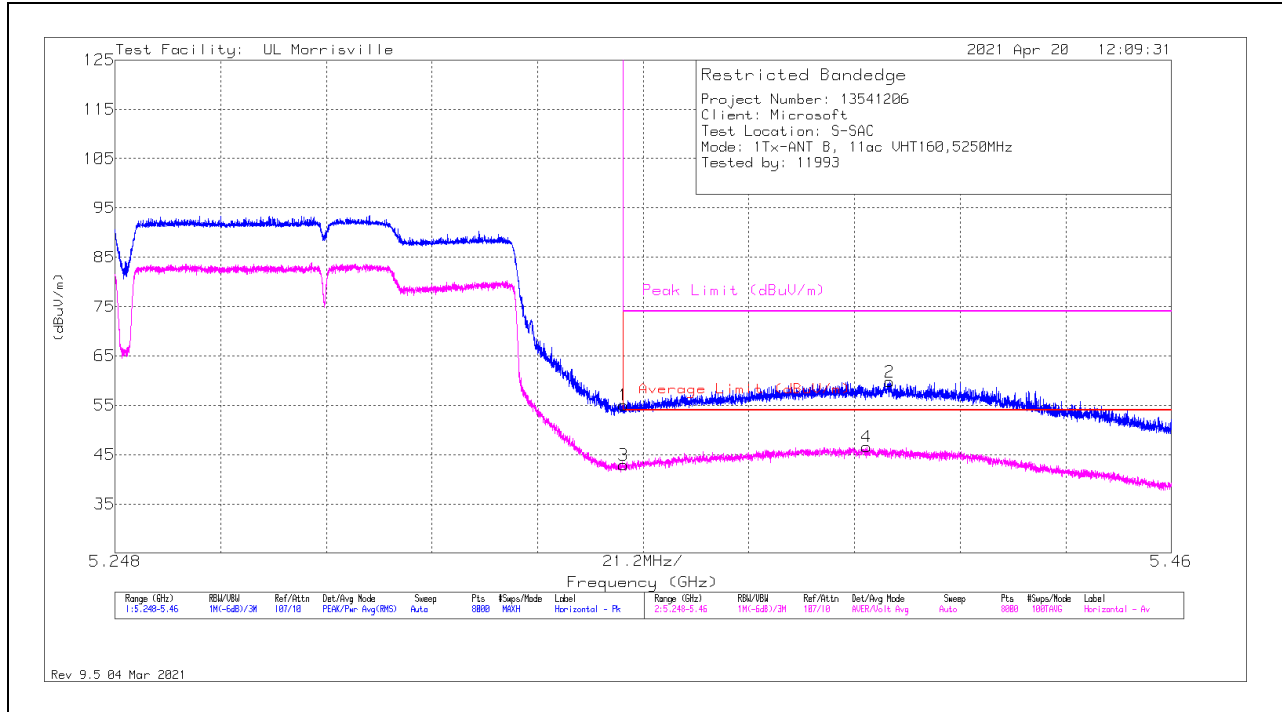

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	43.74	Pk	34.5	-23.2	55.04	-	-	74	-18.96	193	156	H
2	*** 5.40344	48.54	Pk	34.5	-23.3	59.74	-	-	74	-14.26	193	156	H
3	*** 5.35001	31.59	ADV	34.5	-23.2	42.89	54	-11.11	-	-	193	156	H
4	*** 5.39886	35.38	ADV	34.5	-23.3	46.58	54	-7.42	-	-	193	156	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

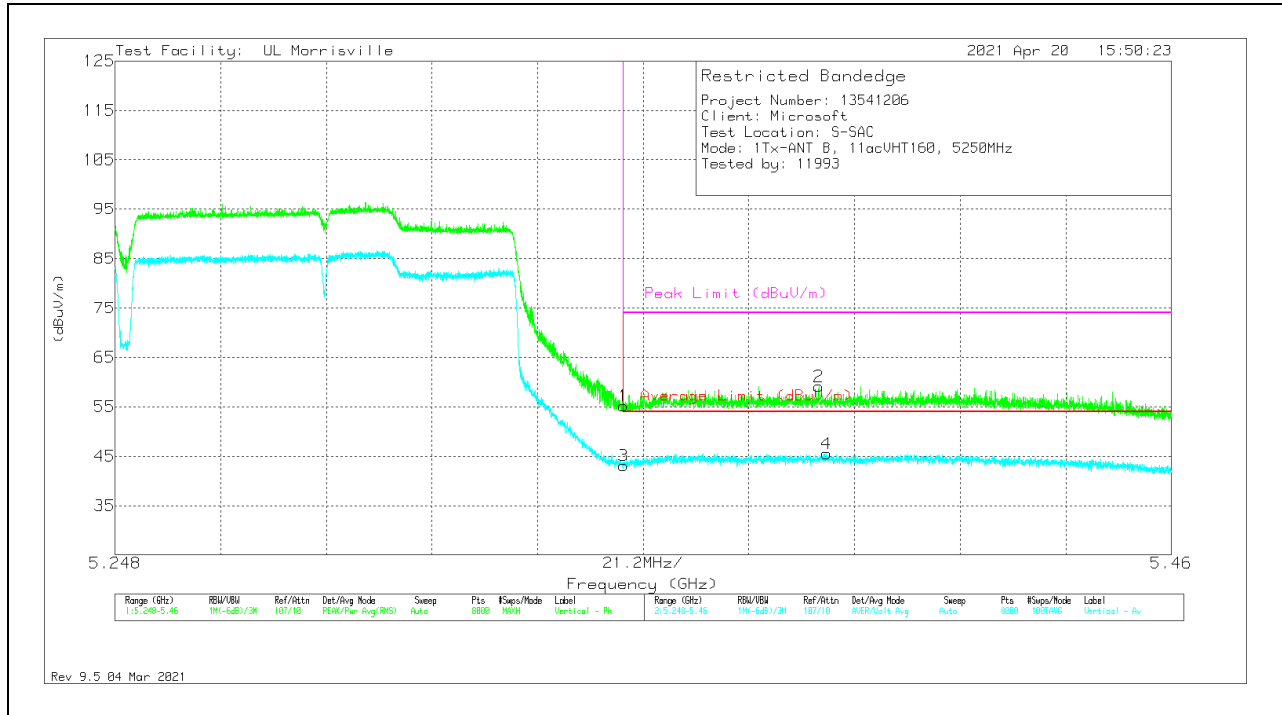

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.89	Pk	34.5	-23.2	55.19	-	-	74	-18.81	42	190	V
2	* ** 5.38923	47.9	Pk	34.5	-23.3	59.1	-	-	74	-14.9	42	190	V
3	* ** 5.35001	31.81	ADV	34.5	-23.2	43.11	54	-10.89	-	-	42	190	V
4	* ** 5.39077	34.37	ADV	34.5	-23.3	45.57	54	-8.43	-	-	42	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B SDM MODE

LOW BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

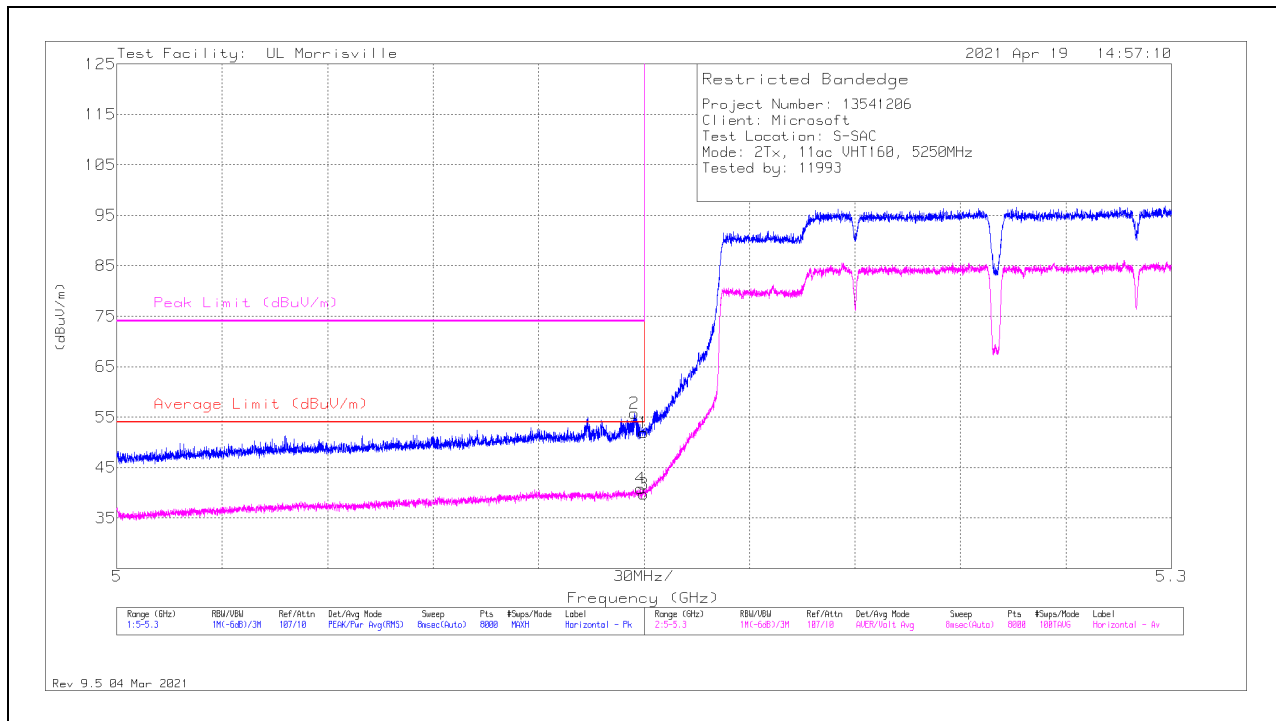

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	40.16	Pk	34.2	-22.4	51.96	-	-	74	-22.04	31	249	H
2	*** 5.14728	43.92	Pk	34.2	-22.4	55.72	-	-	74	-18.28	31	249	H
3	** 5.14998	27.97	ADV	34.2	-22.4	39.77	54	-14.23	-	-	31	249	H
4	** 5.14904	29.04	ADV	34.2	-22.4	40.84	54	-13.16	-	-	31	249	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

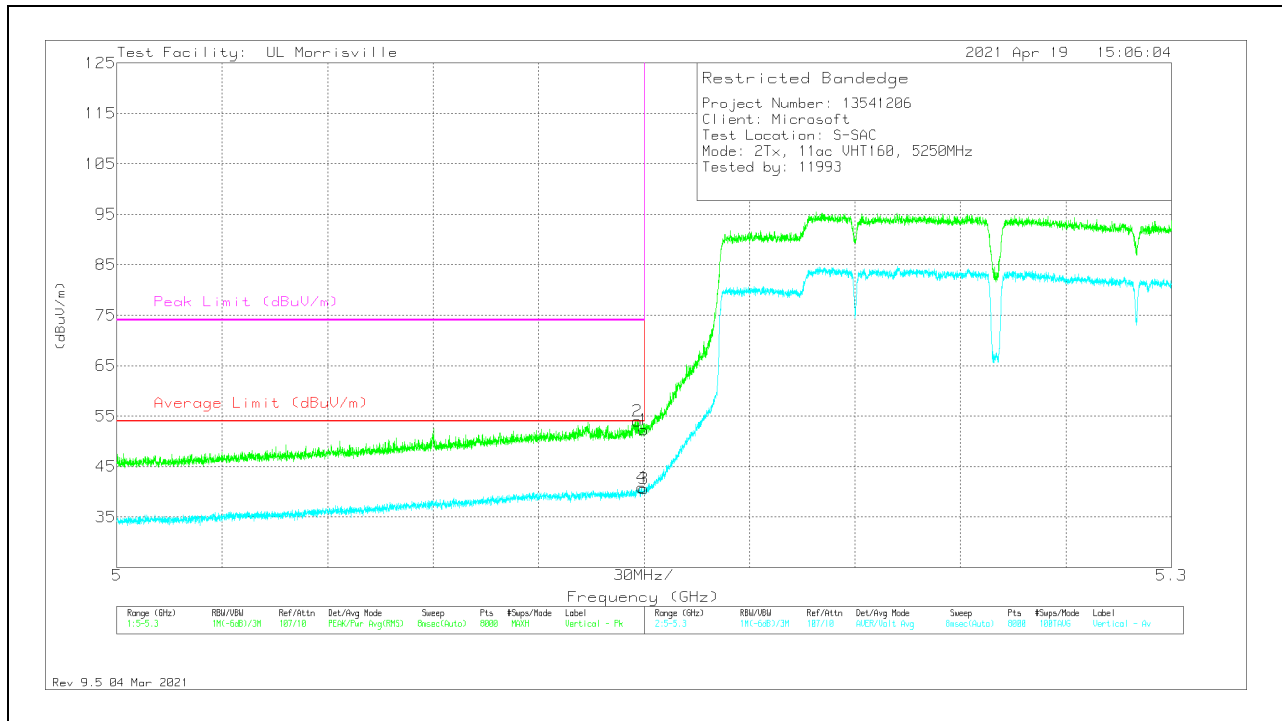


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	40.5	Pk	34.2	-22.4	52.3	-	-	74	-21.7	20	151	V
2	*** 5.14803	42.16	Pk	34.2	-22.4	53.96	-	-	74	-20.04	20	151	V
3	*** 5.14998	28.81	ADV	34.2	-22.4	40.61	54	-13.39	-	-	20	151	V
4	*** 5.14931	29.07	ADV	34.2	-22.4	40.87	54	-13.13	-	-	20	151	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

HIGH BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

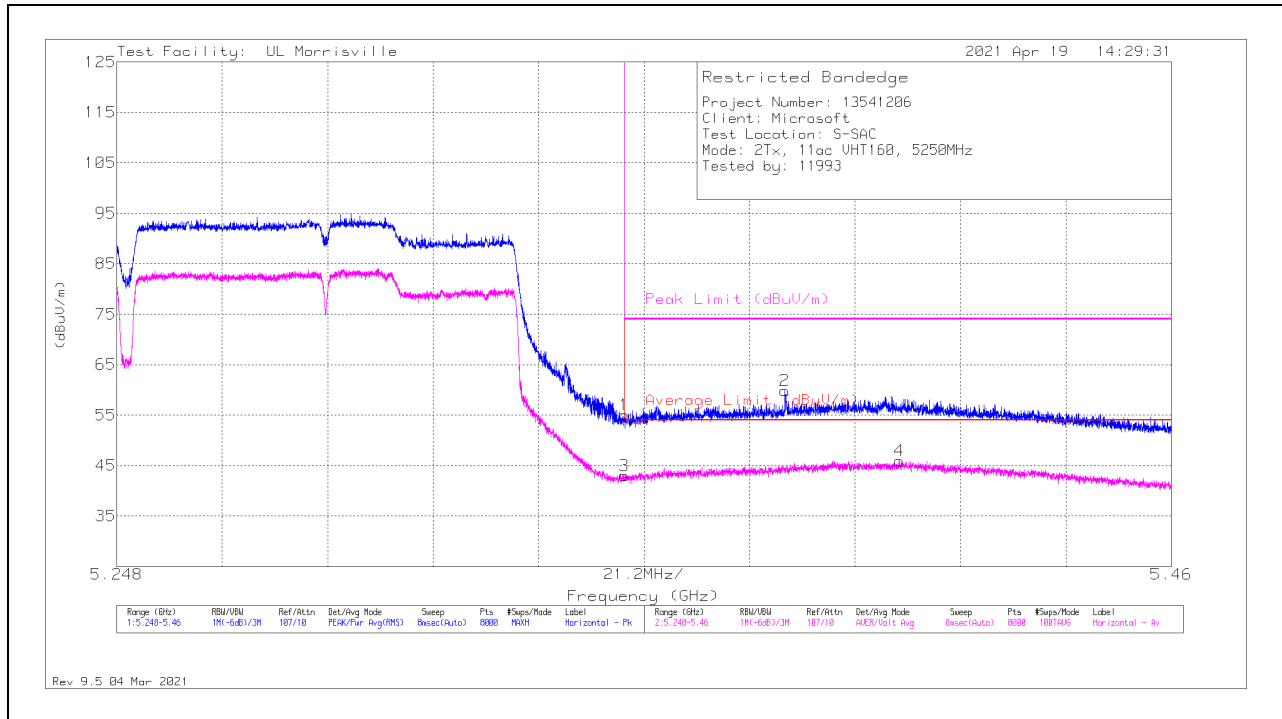

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	43.69	Pk	34.5	-23.2	54.99	-	-	74	-19.01	56	394	H
2	*** 5.38232	48.64	Pk	34.5	-23.3	59.84	-	-	74	-14.16	56	394	H
3	*** 5.35001	31.72	ADV	34.5	-23.2	43.02	54	-10.98	-	-	56	394	H
4	*** 5.40527	34.78	ADV	34.5	-23.3	45.98	54	-8.02	-	-	56	394	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

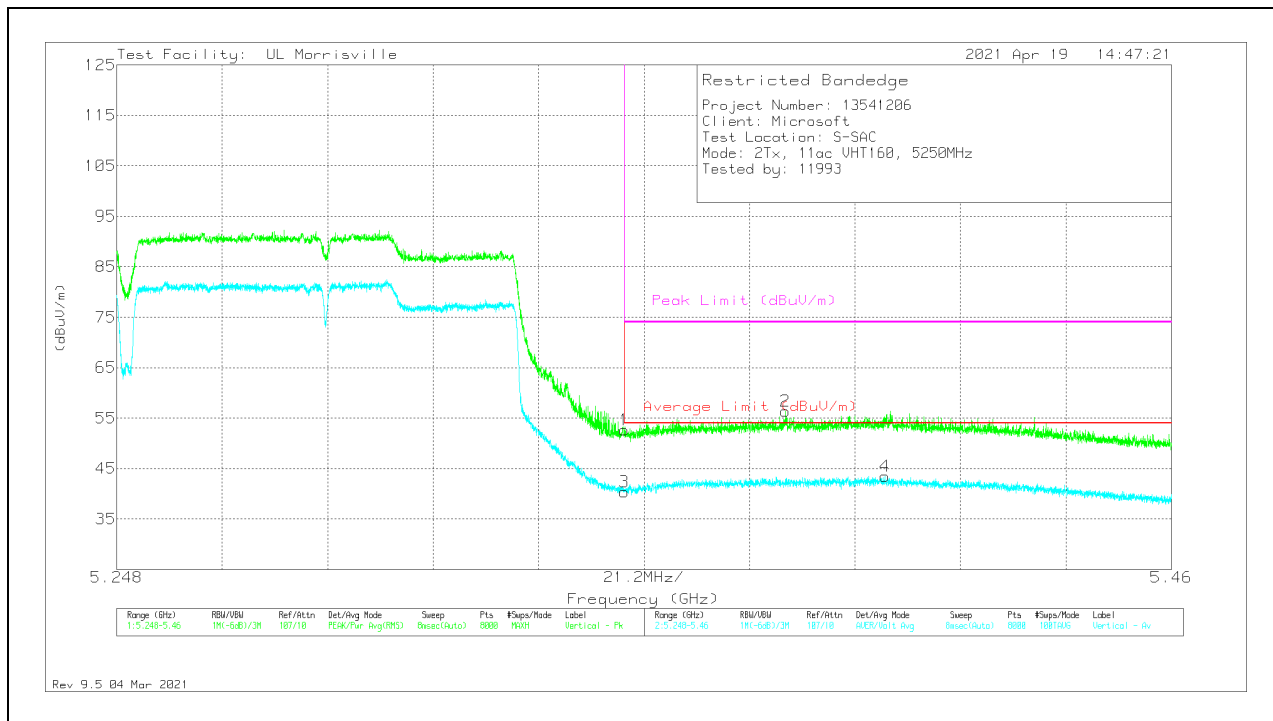

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	41.37	Pk	34.5	-23.2	52.67	-	-	74	-21.33	121	187	V
2	*** 5.3824	45.21	Pk	34.5	-23.3	56.41	-	-	74	-17.59	121	187	V
3	*** 5.35001	29.08	ADV	34.5	-23.2	40.38	54	-13.62	-	-	121	187	V
4	*** 5.40238	32.3	ADV	34.5	-23.3	43.5	54	-10.5	-	-	121	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

11. SETUP PHOTOS

Please refer to ER13541206-EP2 for setup photos.

END OF TEST REPORT