


VERTICAL RESULT

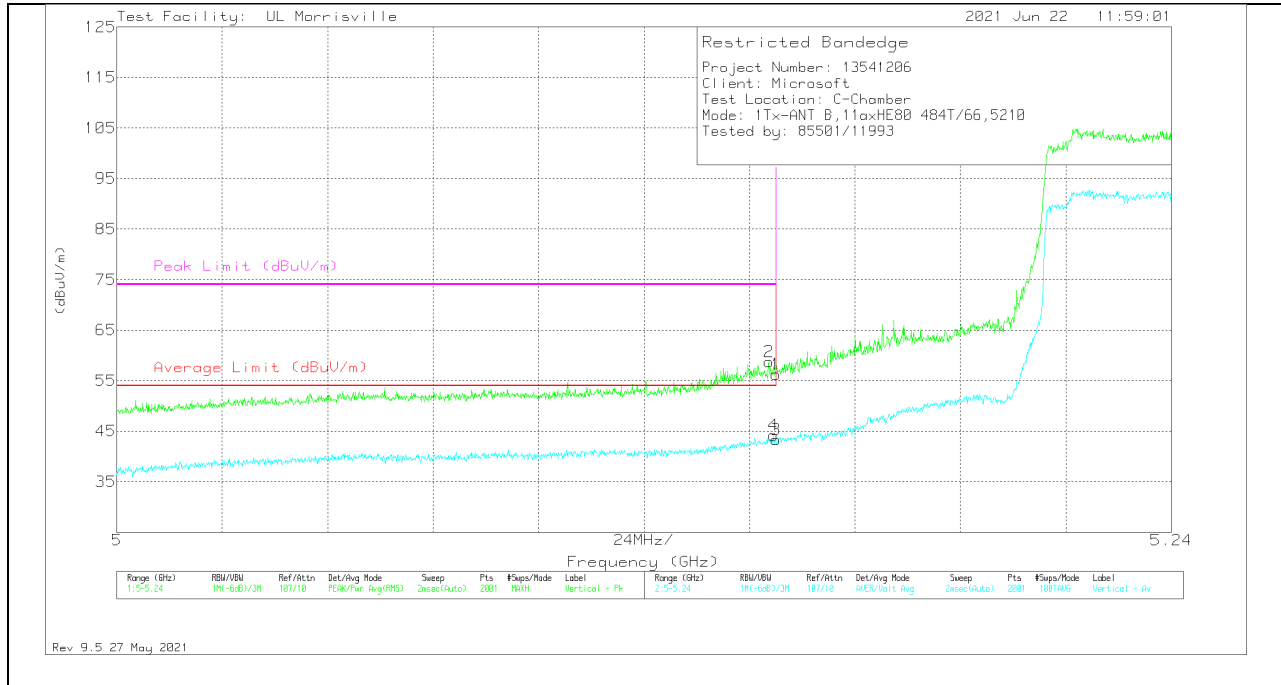

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.15	44.66	Pk	34.4	-22.8	56.26	-	-	74	-17.74	168	172	V
2	*** 5.14844	47.19	Pk	34.4	-22.8	58.79	-	-	74	-15.21	168	172	V
3	*** 5.15	31.77	ADV	34.4	-22.8	43.37	54	-10.63	-	-	168	172	V
4	*** 5.1494	32.56	ADV	34.4	-22.8	44.16	54	-9.84	-	-	168	172	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

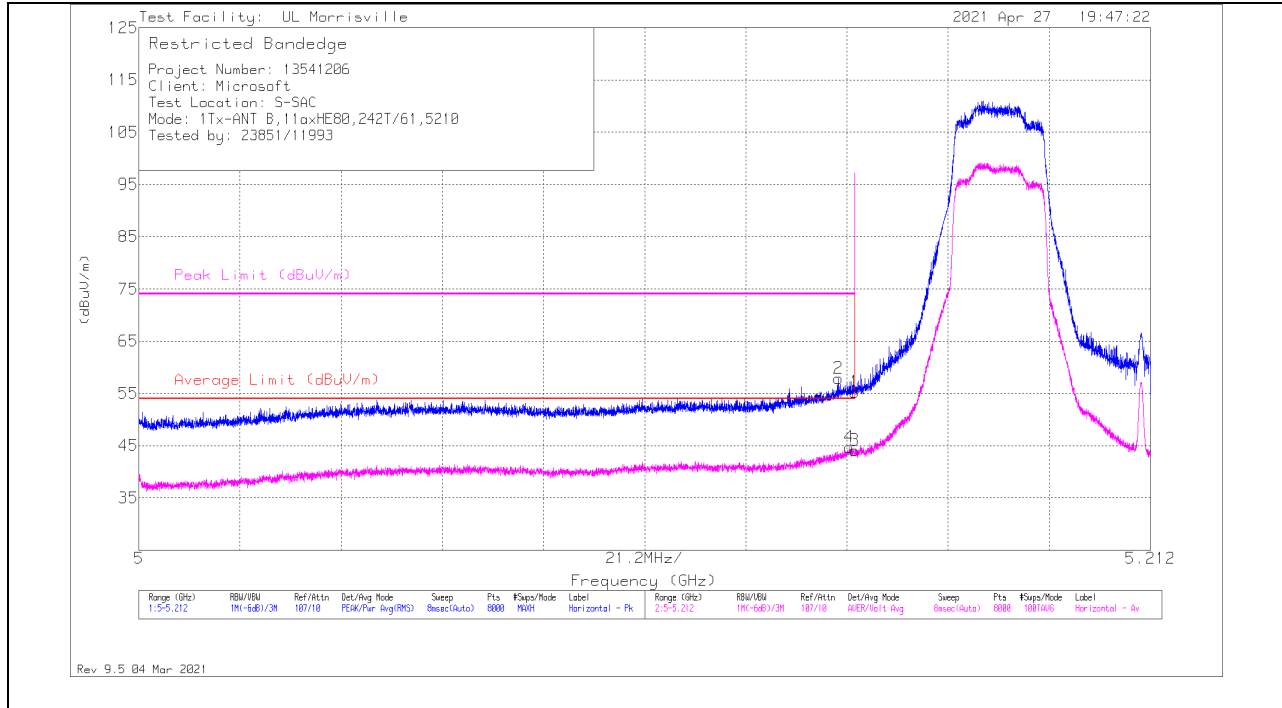

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	43.41	Pk	34.3	-22.4	55.31	-	-	74	-18.69	101	184	H
2	** 5.14661	45.92	Pk	34.3	-22.4	57.82	-	-	74	-16.18	101	184	H
3	*** 5.14998	32.21	ADV	34.3	-22.4	44.11	54	-9.89	-	-	101	184	H
4	*** 5.14889	32.79	ADV	34.3	-22.4	44.69	54	-9.31	-	-	101	184	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

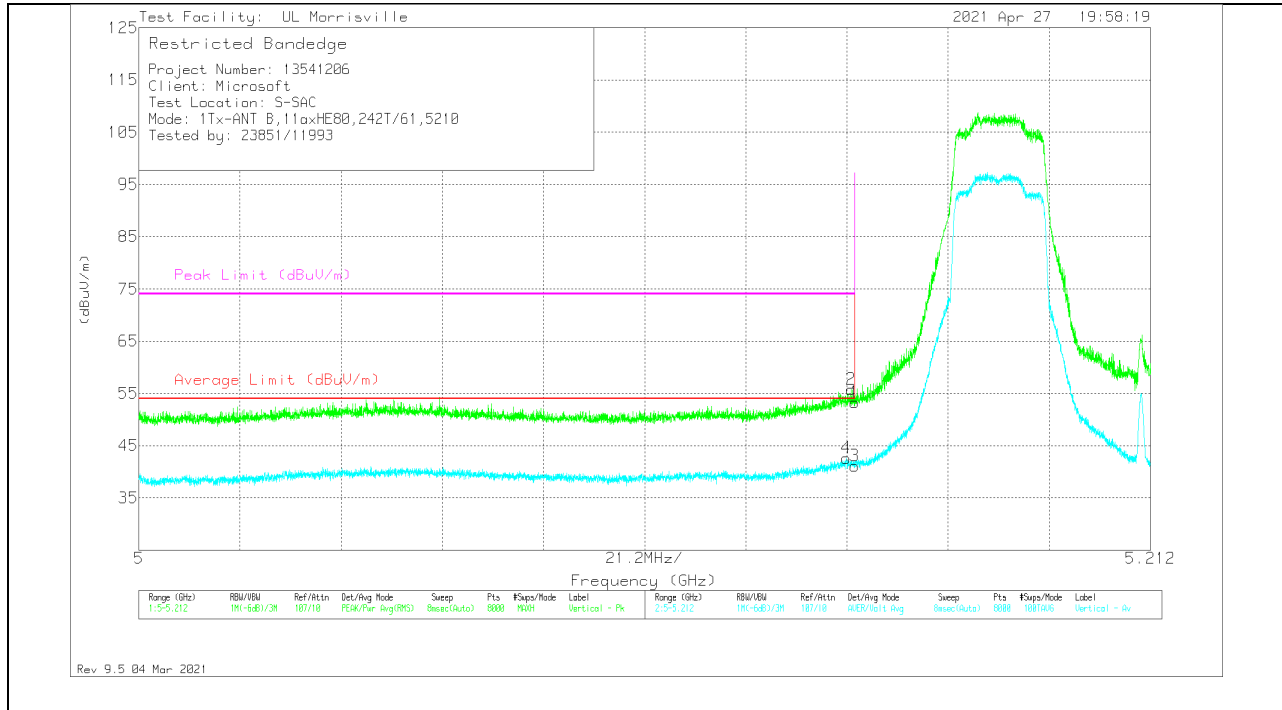


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	41.41	PK	34.3	-22.4	53.31	-	-	74	-20.69	60	127	V
2	*** 5.14921	43.85	PK	34.3	-22.4	55.75	-	-	74	-18.25	60	127	V
3	*** 5.14998	29.17	ADV	34.3	-22.4	41.07	54	-12.93	-	-	60	127	V
4	*** 5.14826	30.66	ADV	34.3	-22.4	42.56	54	-11.44	-	-	60	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 62

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

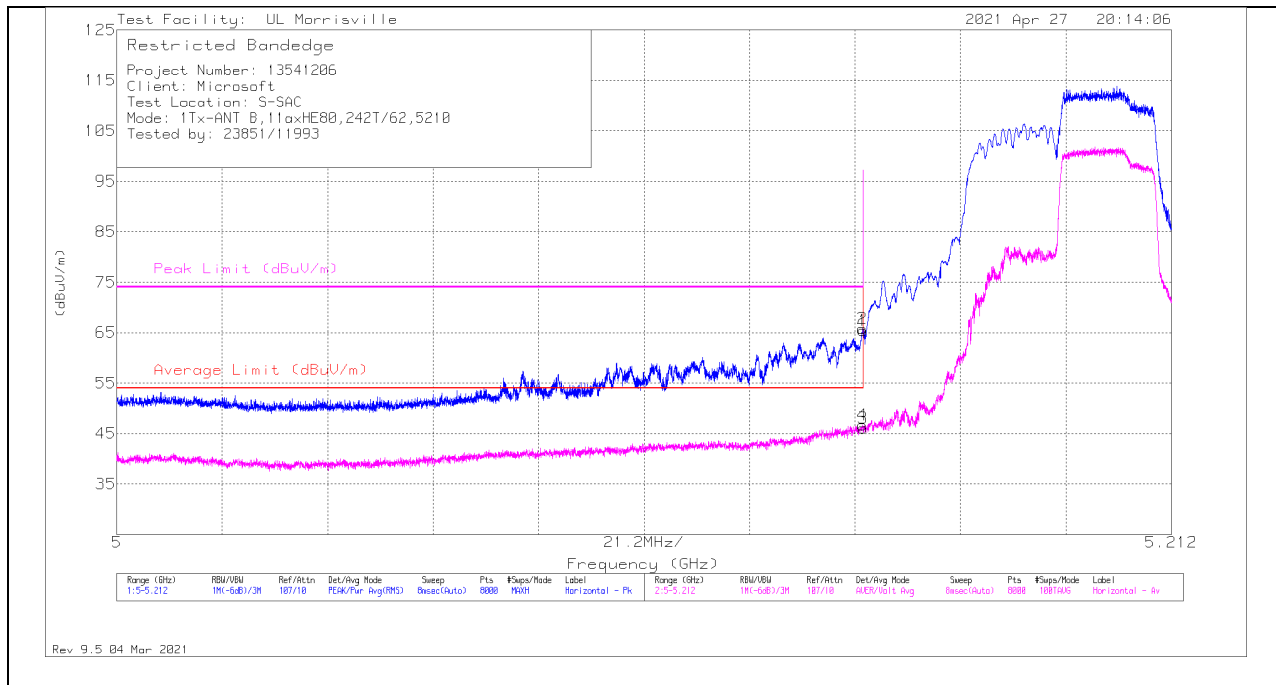

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	53.5	Pk	34.3	-22.4	65.4	-	-	74	-8.6	68	237	H
2	*** 5.14987	53.95	Pk	34.3	-22.4	65.85	-	-	74	-8.15	68	237	H
3	*** 5.14998	34.2	ADV	34.3	-22.4	46.1	54	-7.9	-	-	68	237	H
4	*** 5.1499	34.79	ADV	34.3	-22.4	46.69	54	-7.31	-	-	68	237	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

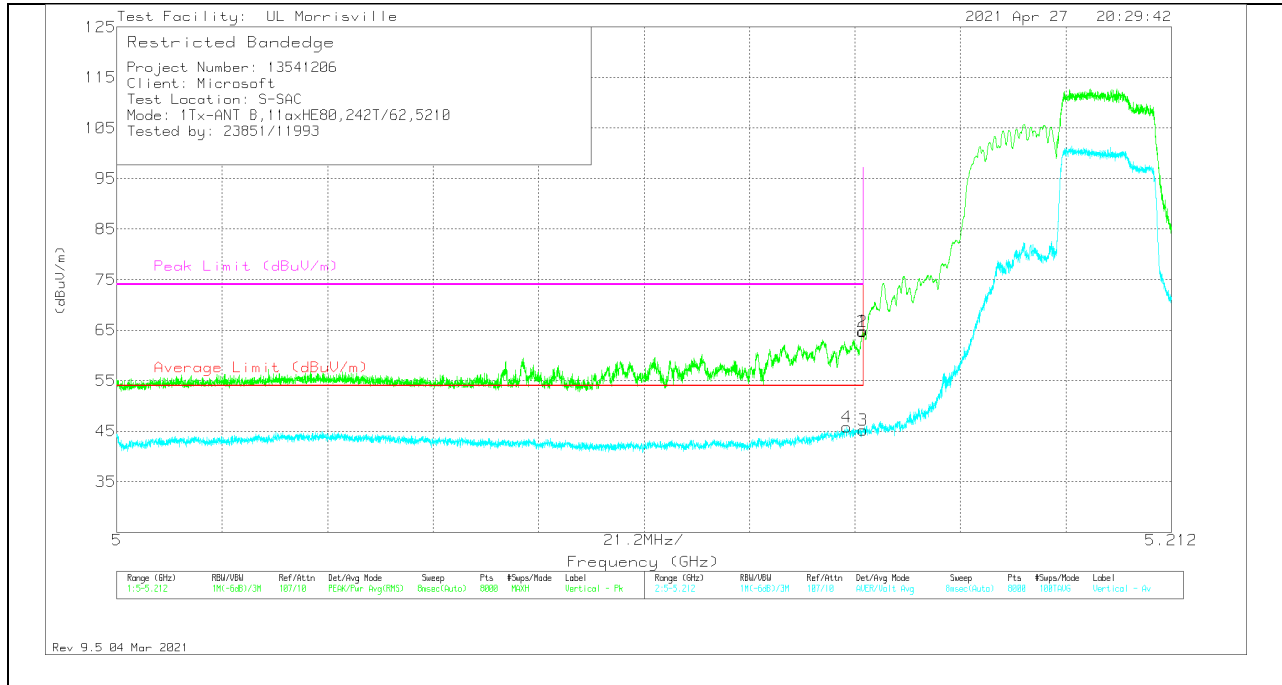


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	52.87	Pk	34.3	-22.4	64.77	-	-	74	-9.23	50	226	V
2	* ** 5.14993	52.8	Pk	34.3	-22.4	64.7	-	-	74	-9.3	50	226	V
3	* ** 5.14998	33.25	ADV	34.3	-22.4	45.15	54	-8.85	-	-	50	226	V
4	* ** 5.14677	33.87	ADV	34.3	-22.4	45.77	54	-8.23	-	-	50	226	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

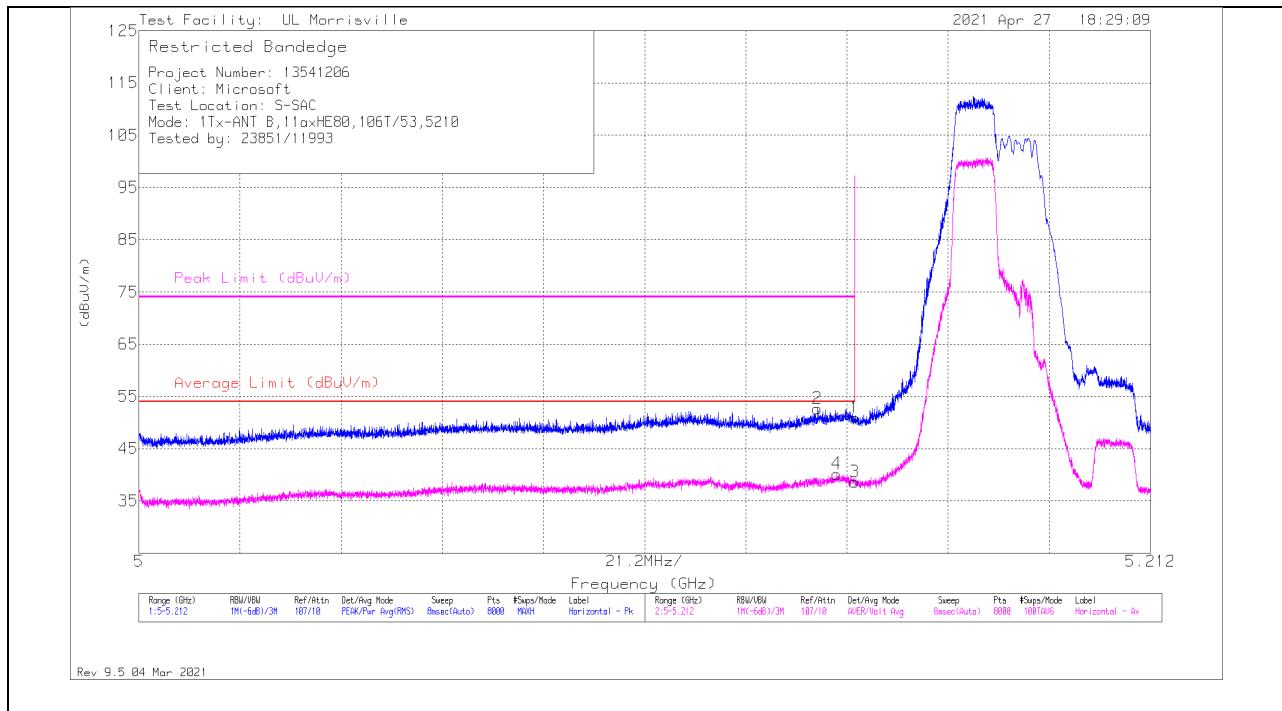

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	38.98	Pk	34.3	-22.4	50.88	-	-	74	-23.12	317	315	H
2	* ** 5.14224	40.86	Pk	34.3	-22.5	52.66	-	-	74	-21.34	317	315	H
3	* ** 5.14998	26.76	ADV	34.3	-22.4	38.66	54	-15.34	-	-	317	315	H
4	* ** 5.14622	28.27	ADV	34.3	-22.4	40.17	54	-13.83	-	-	317	315	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

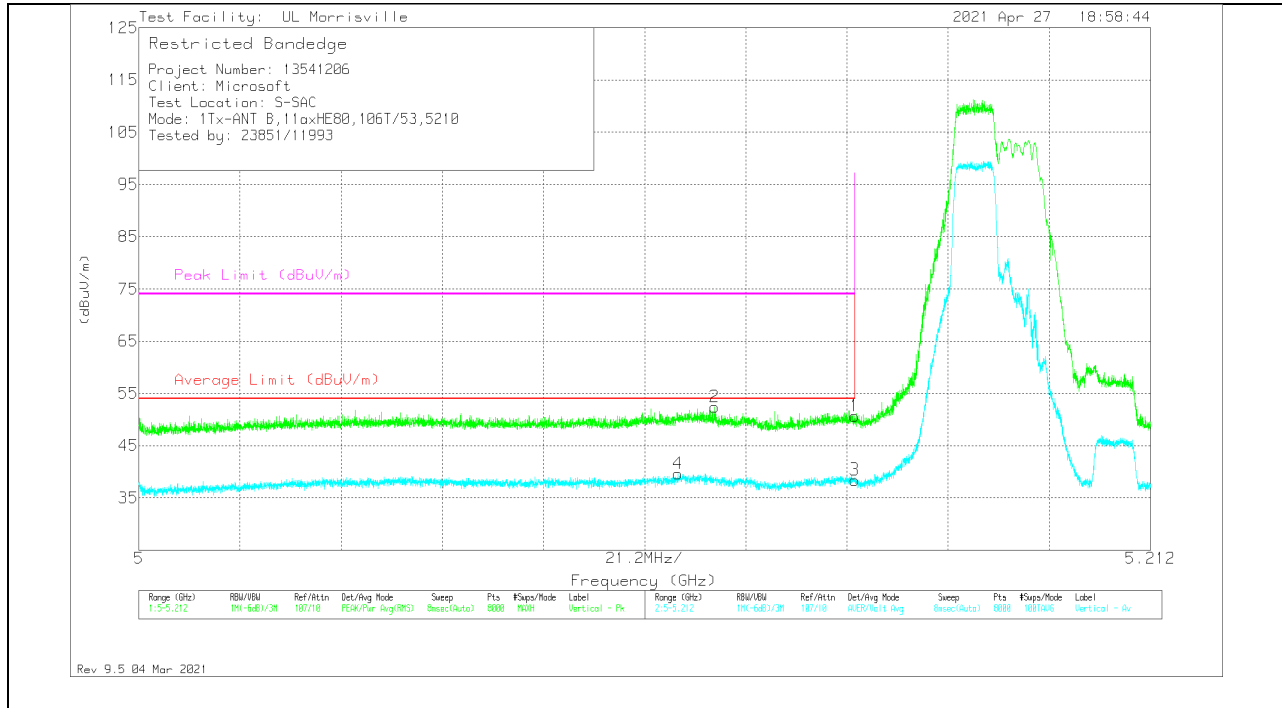


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	38.76	PK	34.3	-22.4	50.66	-	-	74	-23.34	59	112	V
2	*** 5.12067	40.67	PK	34.2	-22.5	52.37	-	-	74	-21.63	59	112	V
3	*** 5.14998	26.53	ADV	34.3	-22.4	38.43	54	-15.57	-	-	59	112	V
4	*** 5.11301	27.91	ADV	34.2	-22.5	39.61	54	-14.39	-	-	59	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

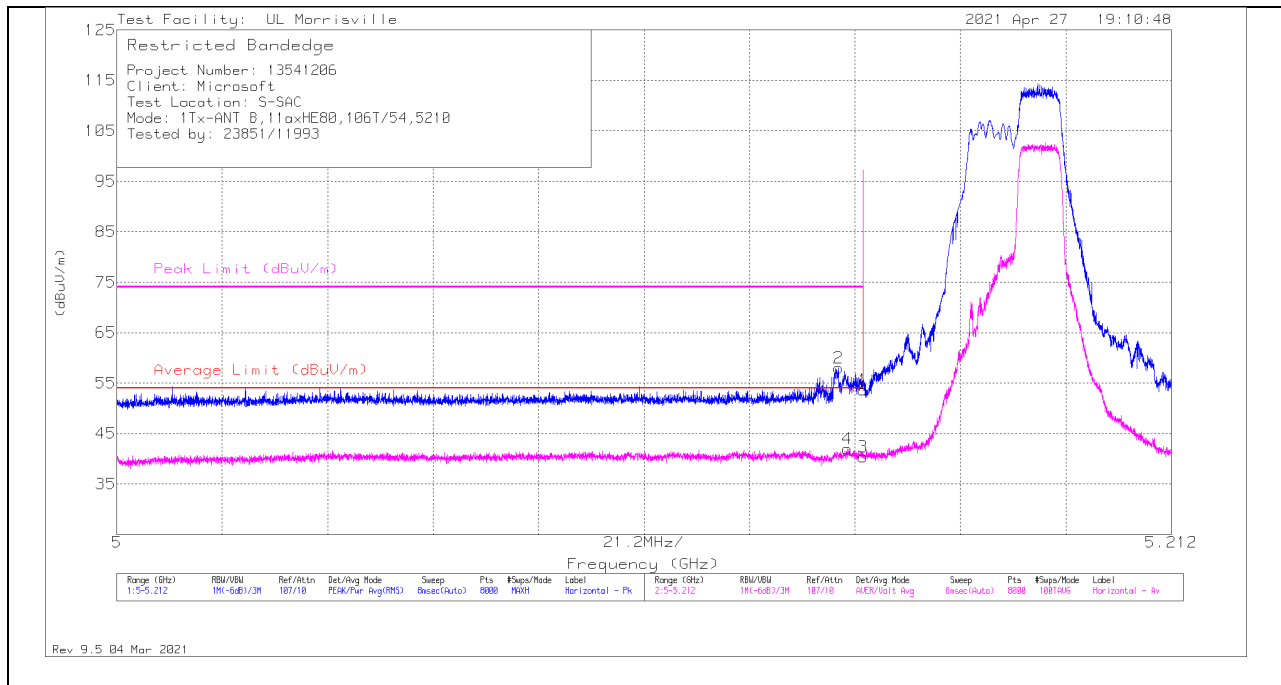

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14998	41.69	Pk	34.3	-22.4	53.59	-	-	74	-20.41	96	359	H
2	*** 5.14505	46.14	Pk	34.3	-22.4	58.04	-	-	74	-15.96	96	359	H
3	*** 5.14998	28.44	ADV	34.3	-22.4	40.34	54	-13.66	-	-	96	359	H
4	*** 5.14688	30.06	ADV	34.3	-22.4	41.96	54	-12.04	-	-	96	359	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

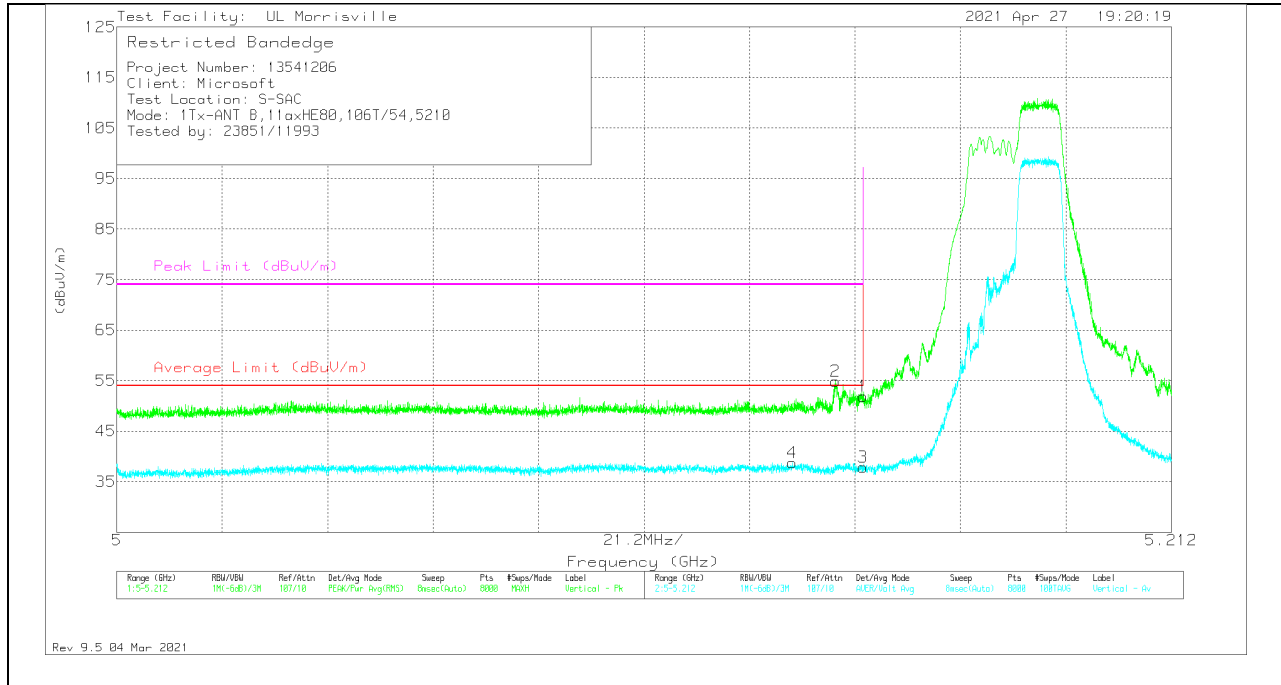


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	39.95	Pk	34.3	-22.4	51.85	-	-	74	-22.15	353	357	V
2	* ** 5.14452	43.06	Pk	34.3	-22.5	54.86	-	-	74	-19.14	353	357	V
3	* ** 5.14998	25.92	ADV	34.3	-22.4	37.82	54	-16.18	-	-	353	357	V
4	* ** 5.13577	27.1	ADV	34.2	-22.5	38.8	54	-15.2	-	-	353	357	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 37

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

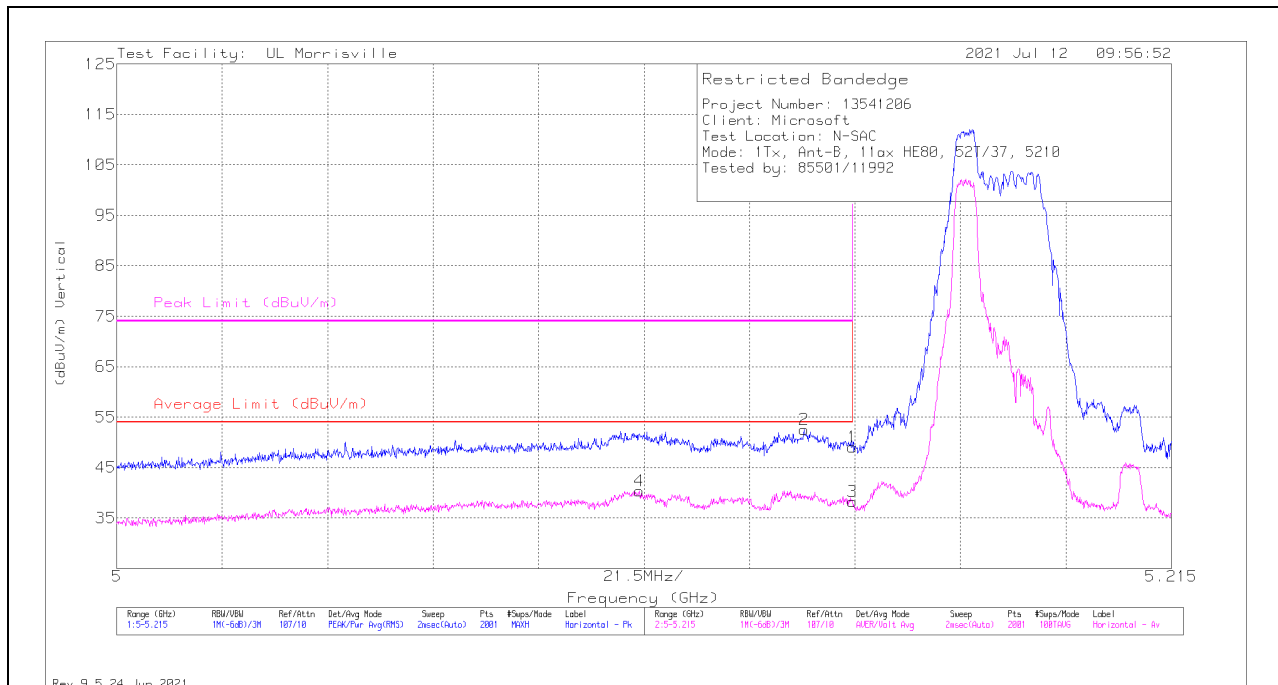

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14996	37.47	Pk	34.4	-22.8	49.07	-	-	74	-24.93	281	203	H
2	*** 5.14018	40.88	Pk	34.4	-22.7	52.58	-	-	74	-21.42	281	203	H
3	*** 5.14996	26.62	ADV	34.4	-22.8	38.22	54	-15.78	-	-	281	203	H
4	*** 5.10653	28.53	ADV	34.4	-22.6	40.33	54	-13.67	-	-	281	203	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

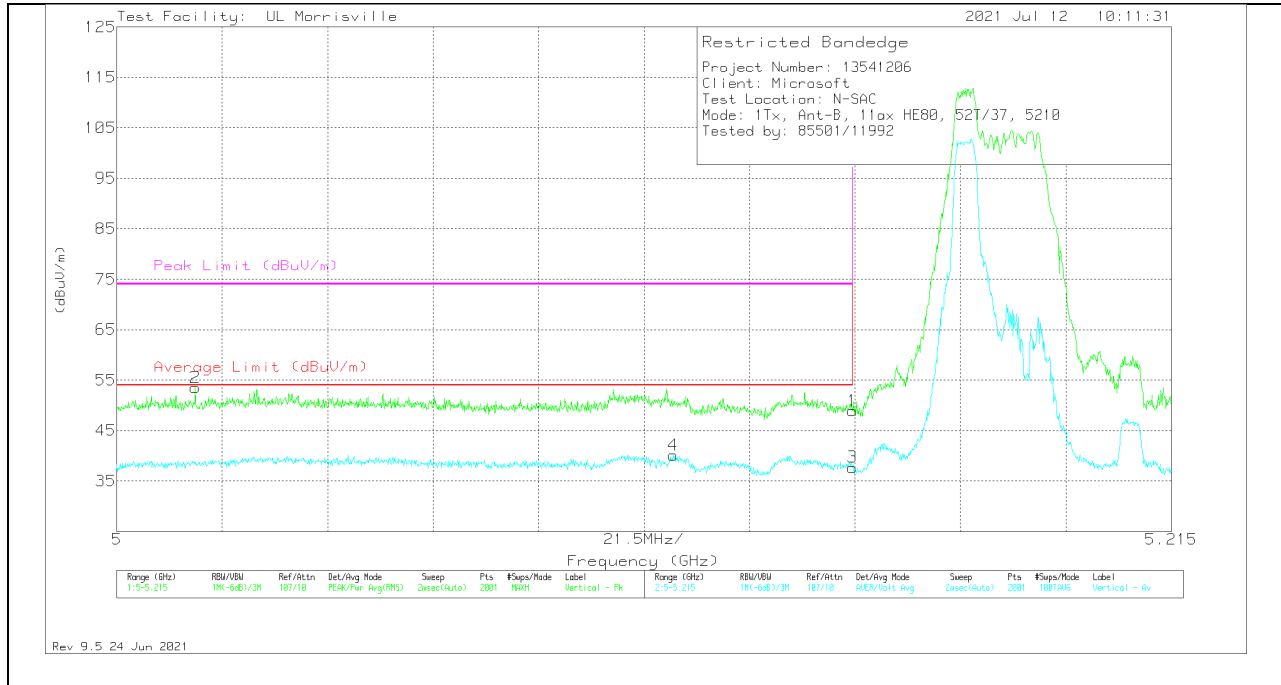

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14996	37.31	Pk	34.4	-22.8	48.91	-	-	74	-25.09	346	203	V
2	*** 5.01602	41.28	Pk	34.4	-22.2	53.48	-	-	74	-20.52	346	203	V
3	*** 5.14996	26.09	ADV	34.4	-22.8	37.69	54	-16.31	-	-	346	203	V
4	*** 5.11341	28.35	ADV	34.4	-22.6	40.15	54	-13.85	-	-	346	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

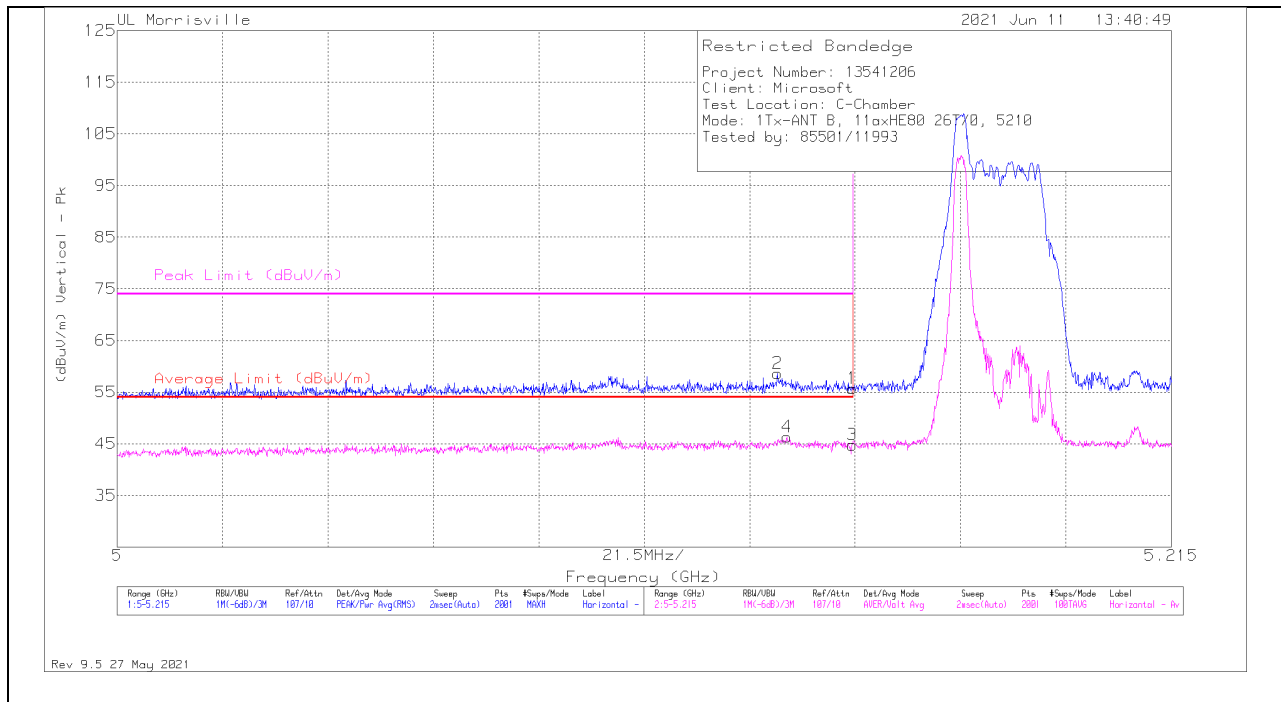

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14996	31.82	Pk	34.2	-10.3	55.72	-	-	74	-18.28	141	361	H
2	* ** 5.1347	34.62	Pk	34.2	-10.2	58.62	-	-	74	-15.38	141	361	H
3	* ** 5.14996	20.89	ADV	34.2	-10.3	44.79	54	-9.21	-	-	141	361	H
4	* ** 5.13663	22.32	ADV	34.2	-10.2	46.32	54	-7.68	-	-	141	361	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

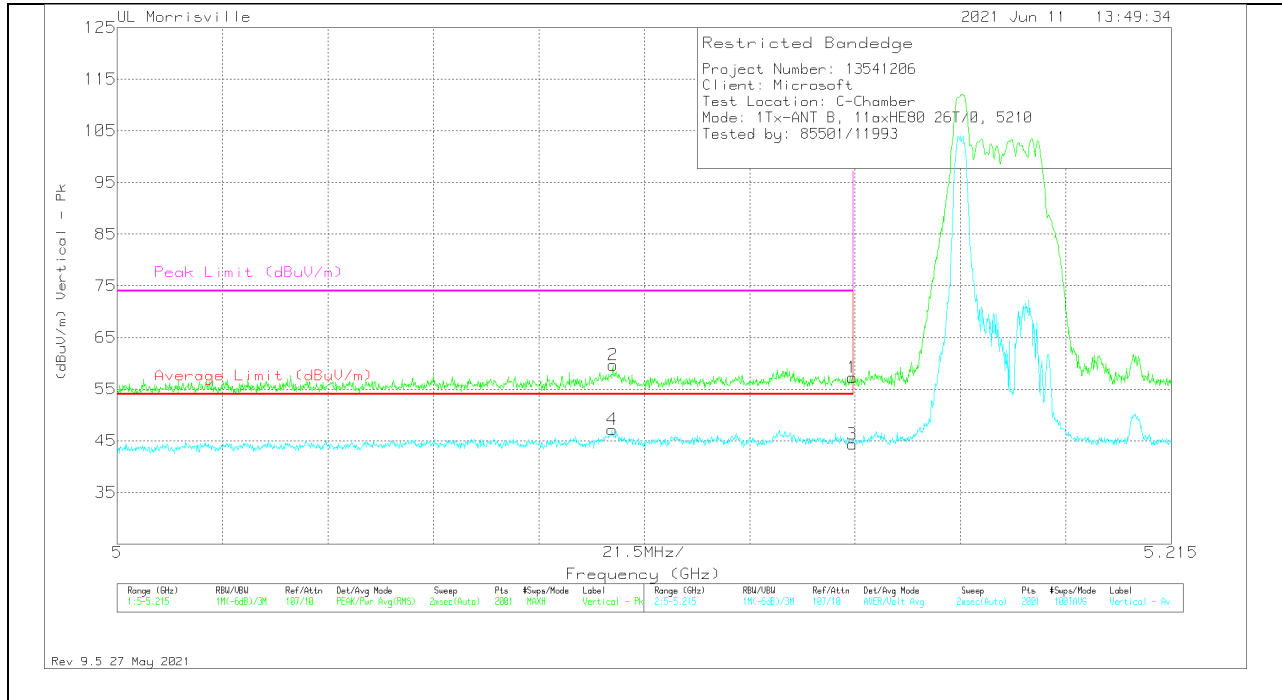

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14996	33.34	Pk	34.2	-10.3	57.24	-	-	74	-16.76	225	167	V
2	*** 5.10116	35.86	Pk	34.1	-10.3	59.66	-	-	74	-14.34	225	167	V
3	*** 5.14996	20.42	ADV	34.2	-10.3	44.32	54	-9.68	-	-	225	167	V
4	*** 5.10094	23.37	ADV	34.1	-10.3	47.17	54	-6.83	-	-	225	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

10.1.2. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.3GHz BAND

2TX Antenna A + Antenna B OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

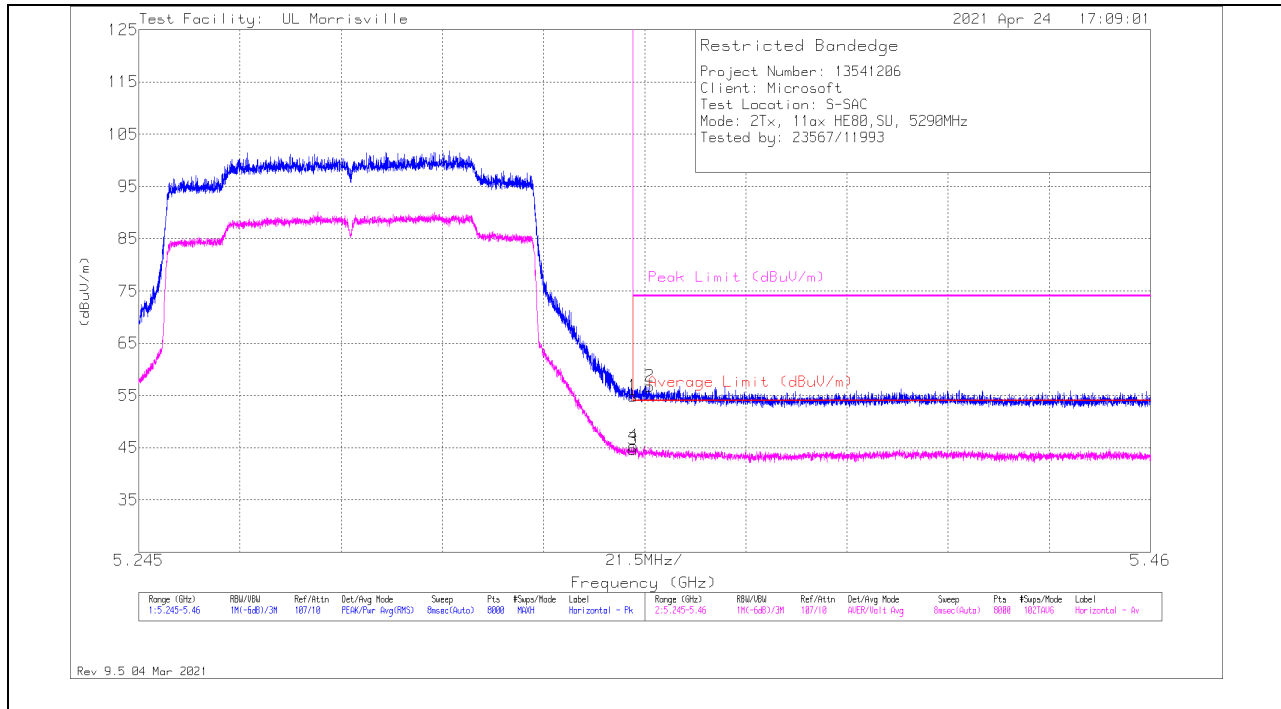

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.58	Pk	34.5	-23.2	0	54.88	-	-	74	-19.12	108	152	H
2	* ** 5.35361	45.5	Pk	34.5	-23.2	0	56.8	-	-	74	-17.2	108	152	H
3	* ** 5.35001	33.14	ADV	34.5	-23.2	.24	44.68	54	-9.32	-	-	108	152	H
4	* ** 5.35017	33.79	ADV	34.5	-23.2	.24	45.33	54	-8.67	-	-	108	152	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

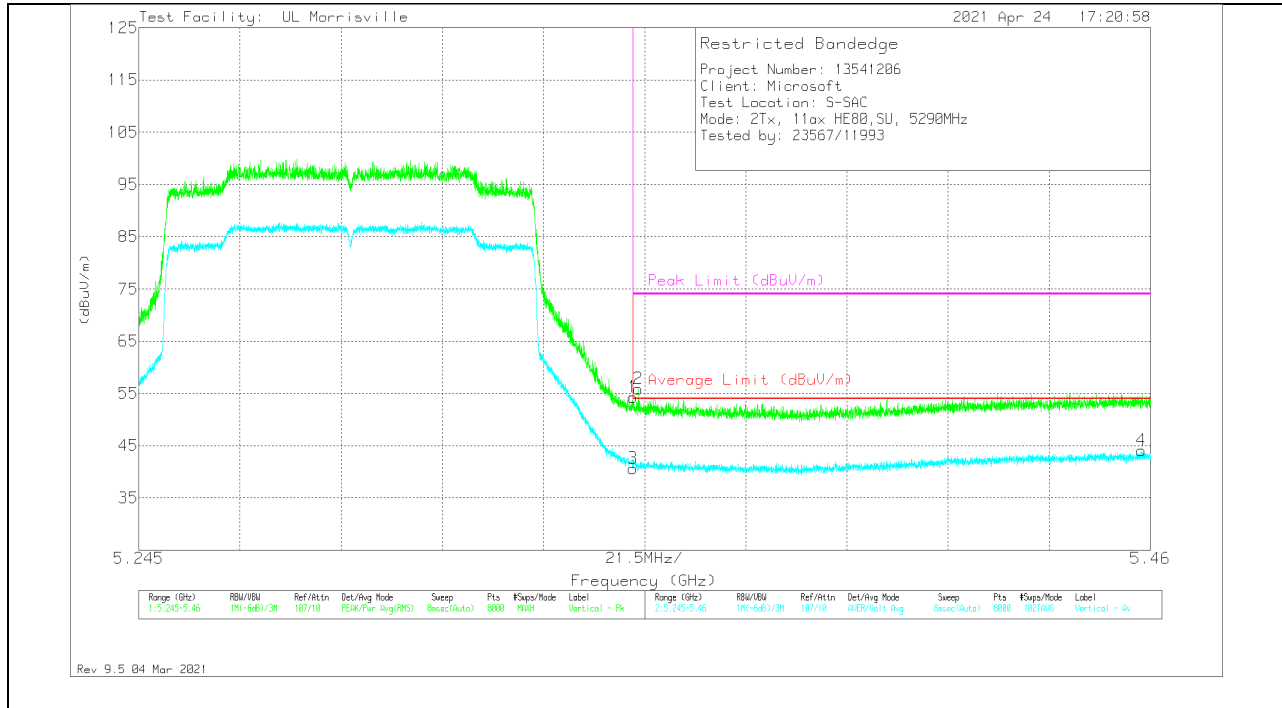


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.02	Pk	34.5	-23.2	0	54.32	-	-	74	-19.68	295	266	V
2	* ** 5.3512	44.63	Pk	34.5	-23.2	0	55.93	-	-	74	-18.07	295	266	V
3	* ** 5.35001	29.07	ADV	34.5	-23.2	.24	40.61	54	-13.39	-	-	295	266	V
4	* ** 5.45812	32.83	ADV	34.5	-23.5	.24	44.07	54	-9.93	-	-	295	266	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

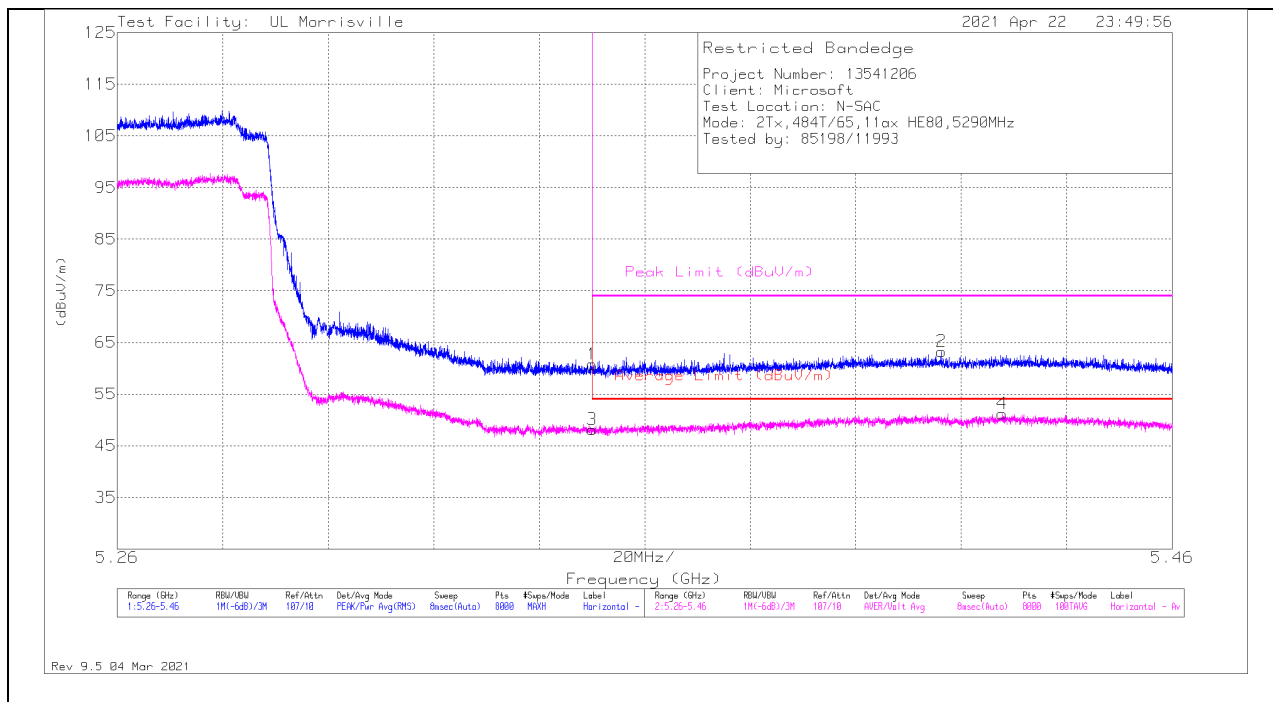

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	49.45	Pk	34.4	-23.1	60.75	-	-	74	-13.25	318	297	H
2	* ** 5.41624	51.87	Pk	34.4	-23	63.27	-	-	74	-10.73	318	297	H
3	* ** 5.35001	36.84	ADV	34.4	-23.1	48.14	54	-5.86	-	-	318	297	H
4	* ** 5.42777	39.92	ADV	34.4	-23.1	51.22	54	-2.78	-	-	318	297	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

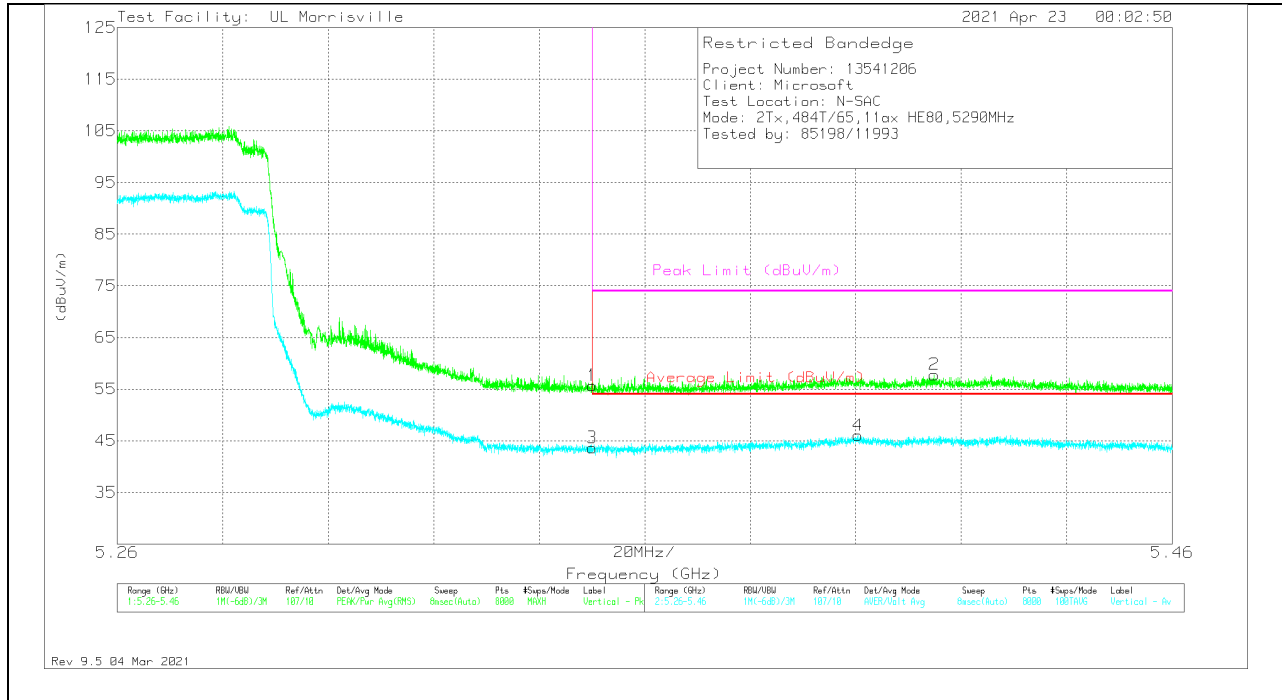

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	44.39	Pk	34.4	-23.1	55.69	-	-	74	-18.31	240	263	V
2	*** 5.41489	46.41	Pk	34.4	-23	57.81	-	-	74	-16.19	240	263	V
3	*** 5.35001	32.34	ADV	34.4	-23.1	43.64	54	-10.36	-	-	240	263	V
4	*** 5.40044	34.65	ADV	34.5	-23.1	46.05	54	-7.95	-	-	240	263	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 484-Tones, RU Index 66

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

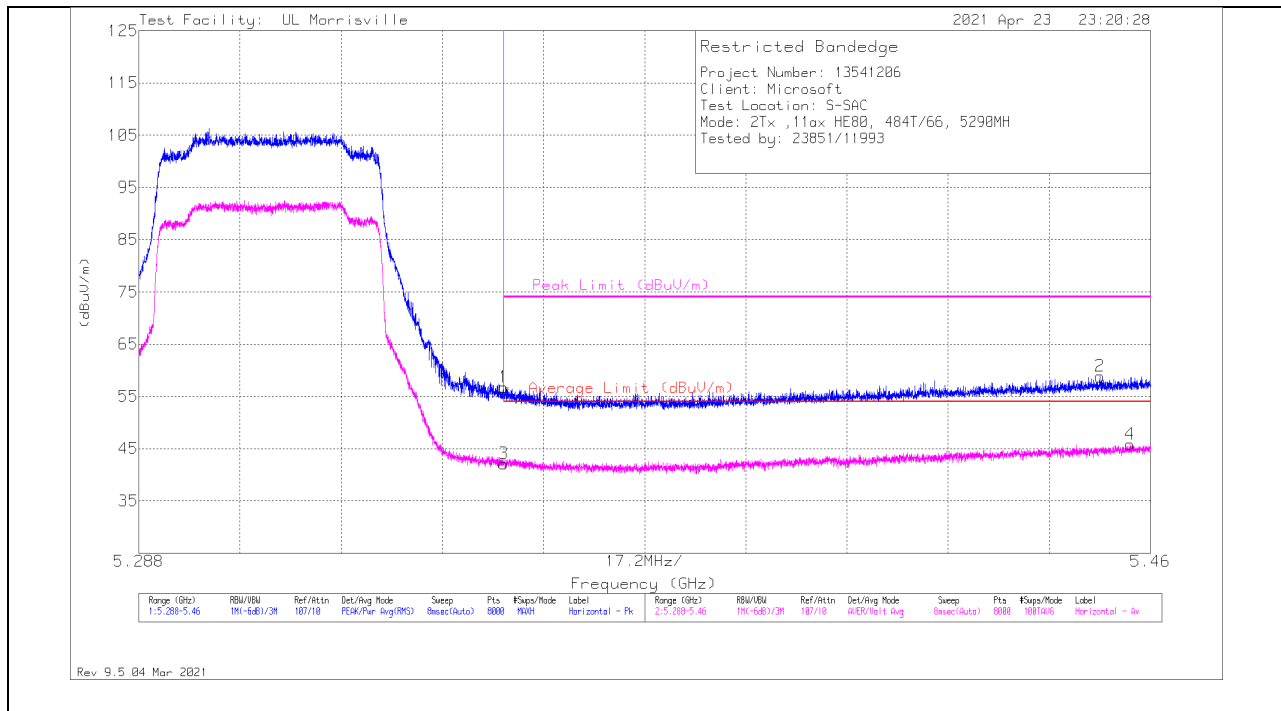

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	45.44	Pk	34.5	-23.2	56.74	-	-	74	-17.26	26	249	H
2	** * 5.4514	47.7	Pk	34.5	-23.4	58.8	-	-	74	-15.2	26	249	H
3	** * 5.35001	30.85	ADV	34.5	-23.2	42.15	54	-11.85	-	-	26	249	H
4	** * 5.45656	34.79	ADV	34.5	-23.5	45.79	54	-8.21	-	-	26	249	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

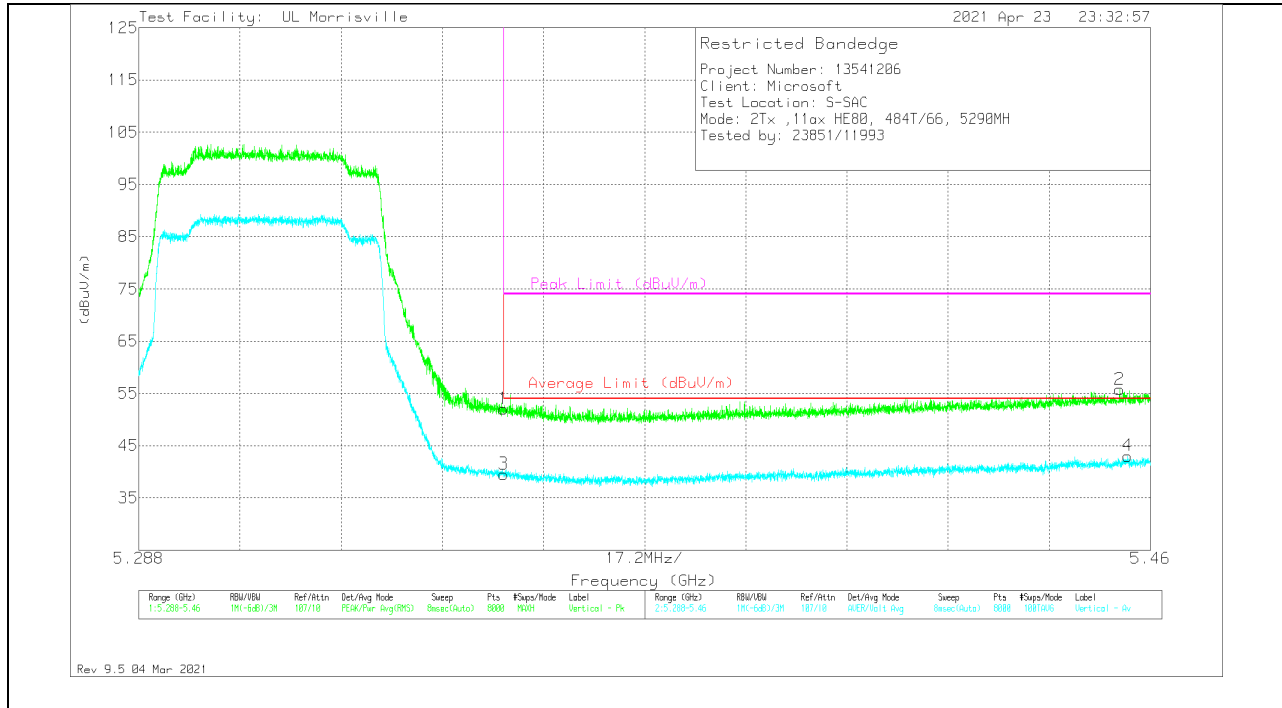


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	40.75	PK	34.5	-23.2	52.05	-	-	74	-21.95	52	222	V
2	** * 5.45473	44.73	PK	34.5	-23.5	55.73	-	-	74	-18.27	52	222	V
3	*** 5.35001	28.25	ADV	34.5	-23.2	39.55	54	-14.45	-	-	52	221	V
4	** * 5.45615	32.03	ADV	34.5	-23.5	43.03	54	-10.97	-	-	52	221	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 242-Tones, RU Index 63

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

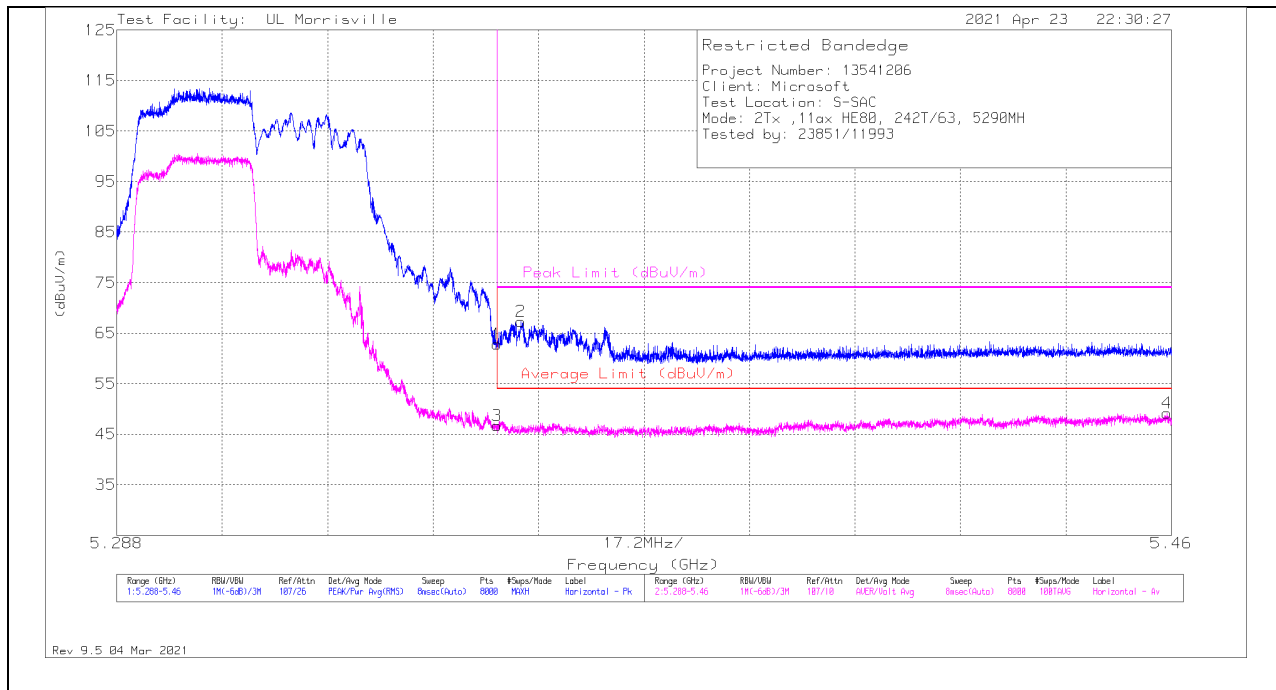

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	51.51	PK	34.5	-23.2	62.81	-	-	74	-11.19	2	185	H
2	* ** 5.35395	56.02	PK	34.5	-23.2	67.32	-	-	74	-6.68	2	185	H
3	* ** 5.35001	35.41	ADV	34.5	-23.2	46.71	54	-7.29	-	-	2	185	H
4	* ** 5.45927	38.17	ADV	34.5	-23.5	49.17	54	-4.83	-	-	2	185	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

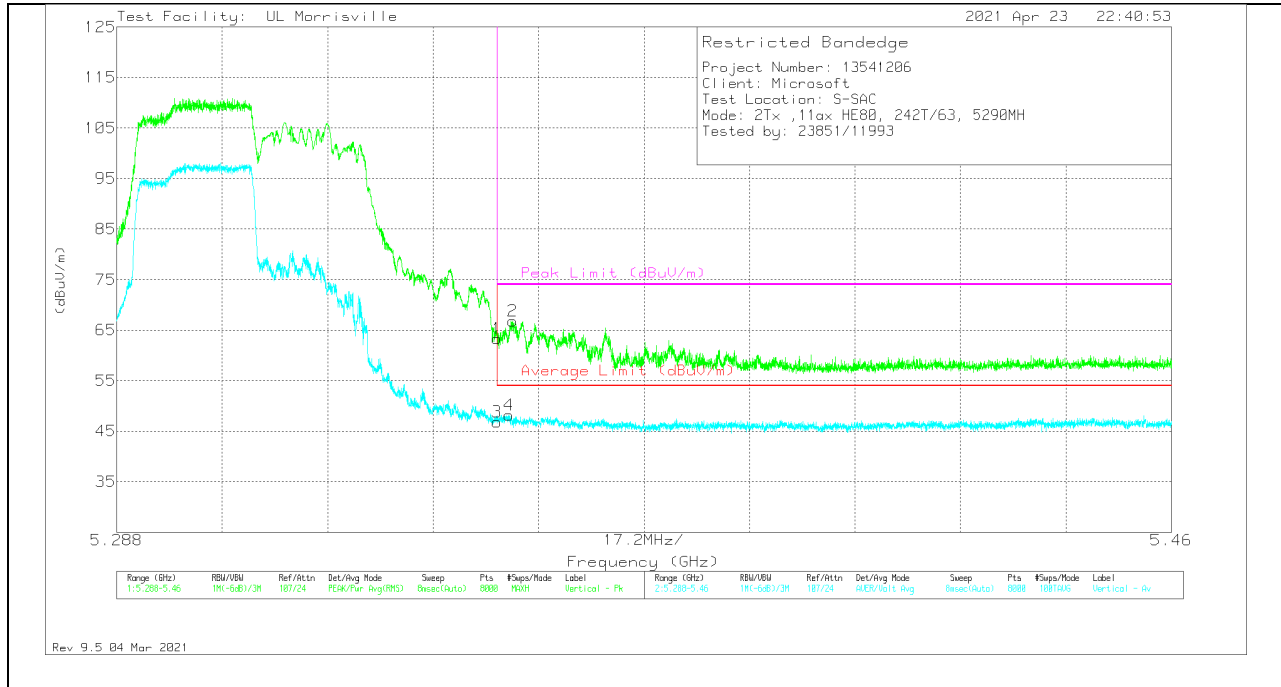

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	52.04	Pk	34.5	-23.2	63.34	-	-	74	-10.66	138	211	V
2	* ** 5.35257	55.48	Pk	34.5	-23.2	66.78	-	-	74	-7.22	138	211	V
3	* ** 5.35001	35.47	ADV	34.5	-23.2	46.77	54	-7.23	-	-	138	210	V
4	* ** 5.35201	36.86	ADV	34.5	-23.2	48.16	54	-5.84	-	-	138	210	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 242-Tones, RU Index 64

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

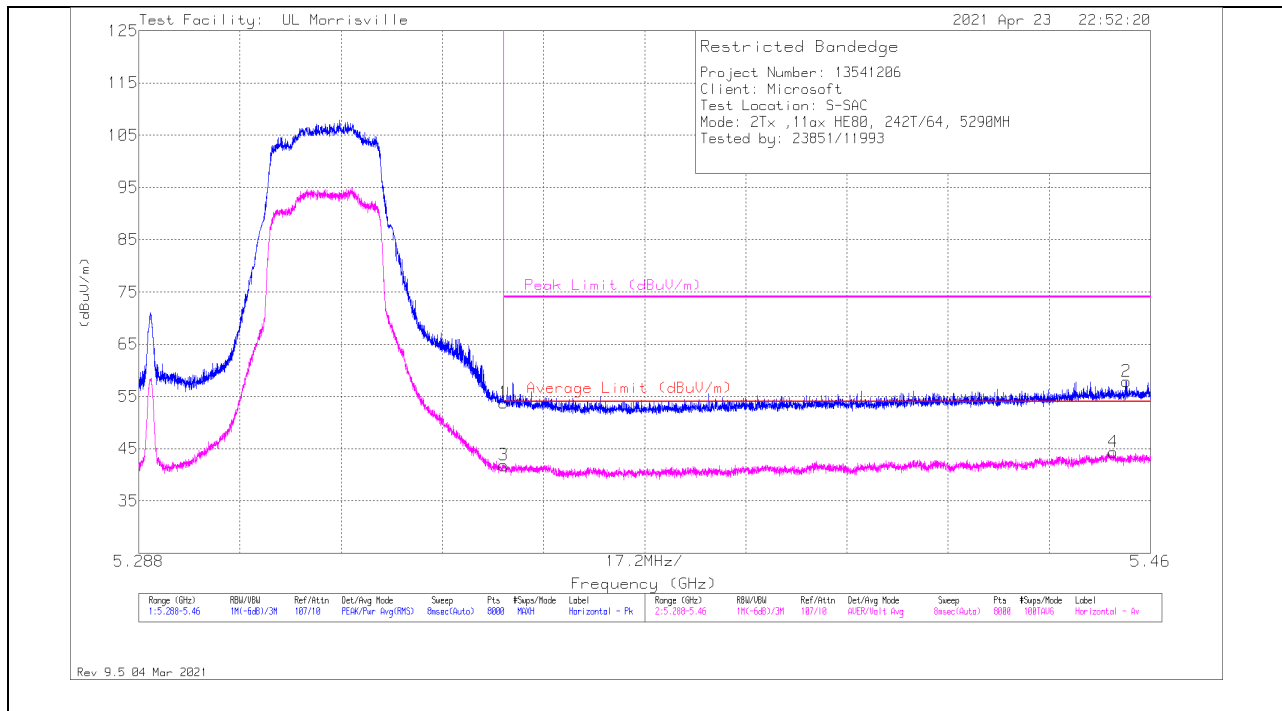

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	42.52	Pk	34.5	-23.2	53.82	-	-	74	-20.18	64	240	H
2	** * 5.45592	46.87	PK	34.5	-23.5	57.87	-	-	74	-16.13	64	240	H
3	** * 5.35001	30.49	ADV	34.5	-23.2	41.79	54	-12.21	-	-	64	240	H
4	** * 5.45364	33.26	ADV	34.5	-23.4	44.36	54	-9.64	-	-	64	240	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT


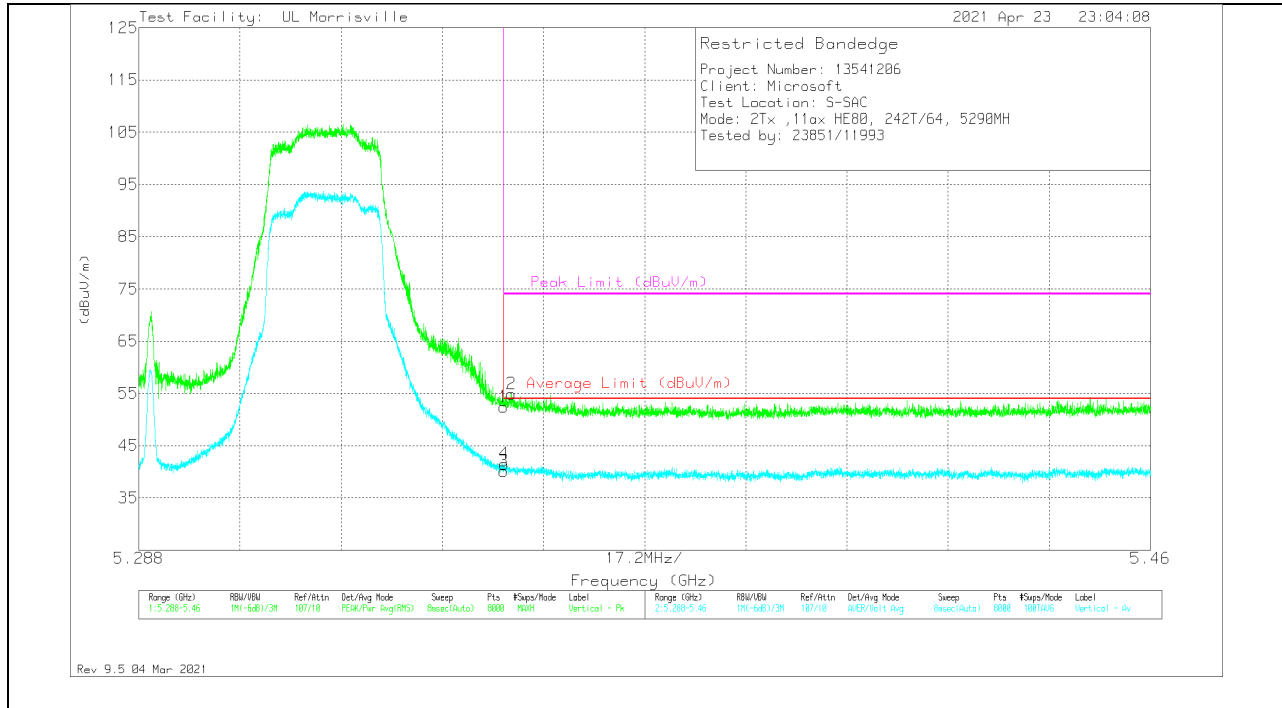


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	41.09	PK	34.5	-23.2	52.39	-	-	74	-21.61	143	251	V
2	*** 5.35135	43.53	PK	34.5	-23.2	54.83	-	-	74	-19.17	143	251	V
3	*** 5.35001	28.8	ADV	34.5	-23.2	40.1	54	-13.9	-	-	143	251	V
4	*** 5.35008	30.16	ADV	34.5	-23.2	41.46	54	-12.54	-	-	143	251	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

MID

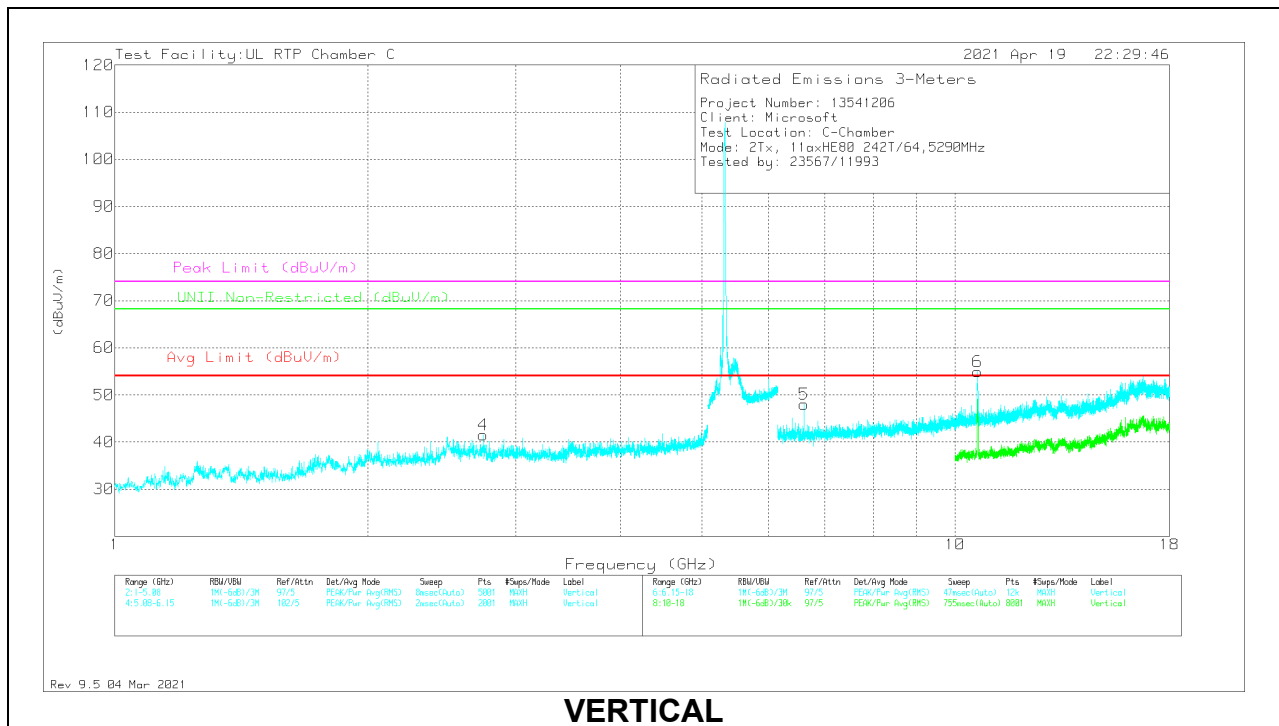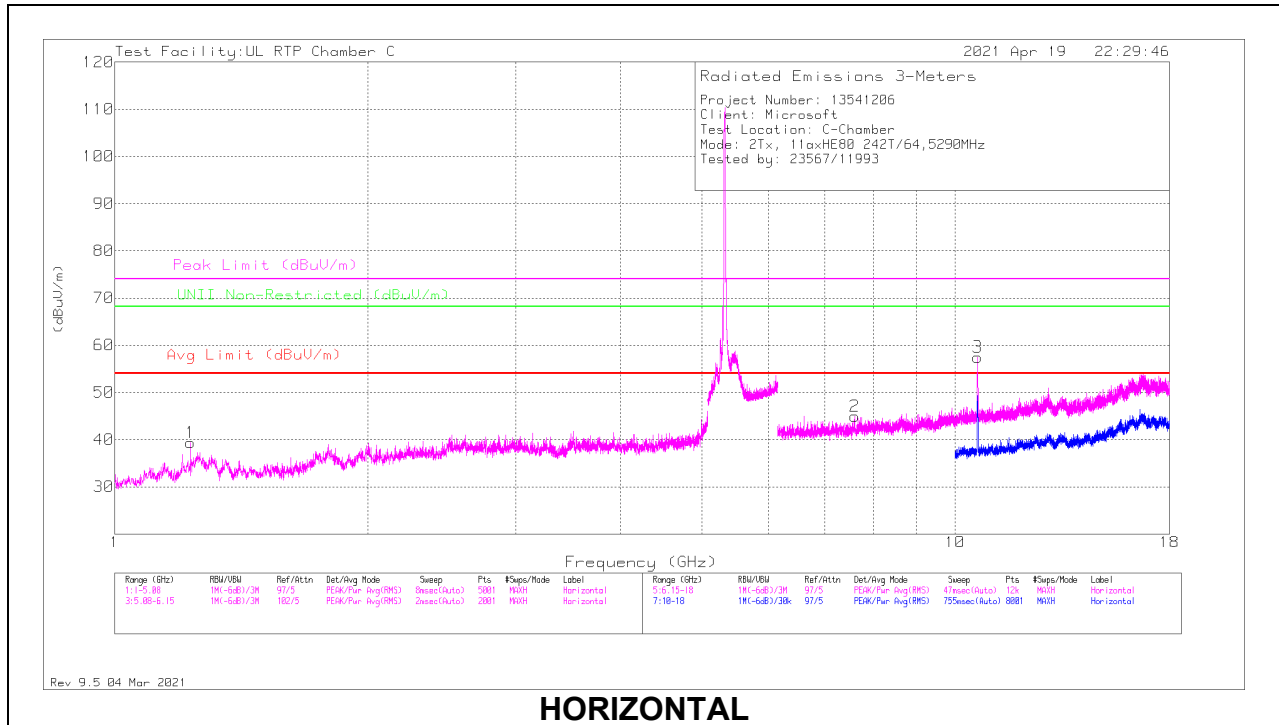

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl /Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	*** 10.6419	62.55	PK-U	37.9	-40.2	60.25	-	-	74	-13.75	-	-	120	147	H
	*** 10.64182	48.57	ADV	37.9	-40.2	46.27	54	-7.73	-	-	-	-	120	147	H
6	*** 10.64528	62.76	PK-U	37.9	-40.1	60.56	-	-	74	-13.44	-	-	162	246	V
	*** 10.64364	48.84	ADV	37.9	-40.2	46.54	54	-7.46	-	-	-	-	162	246	V
5	6.61249	63.12	PK-U	35.8	-45.4	53.52	-	-	-	-	68.2	-14.68	213	272	V
1	*** 1.23093	65.04	Pk	28.1	-53.8	39.34	54	-14.66	74	-34.66	-	-	0-360	101	H
4	*** 2.74461	59.34	Pk	32.4	-50.2	41.54	54	-12.46	74	-32.46	-	-	0-360	200	V
2	*** 7.6036	53.38	Pk	35.9	-44.3	44.98	54	-9.02	74	-29.02	-	-	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector


2TX Antenna A + Antenna B OFDMA MODE: 242-Tones, RU Index 61

HARMONICS AND SPURIOUS EMISSIONS

MID

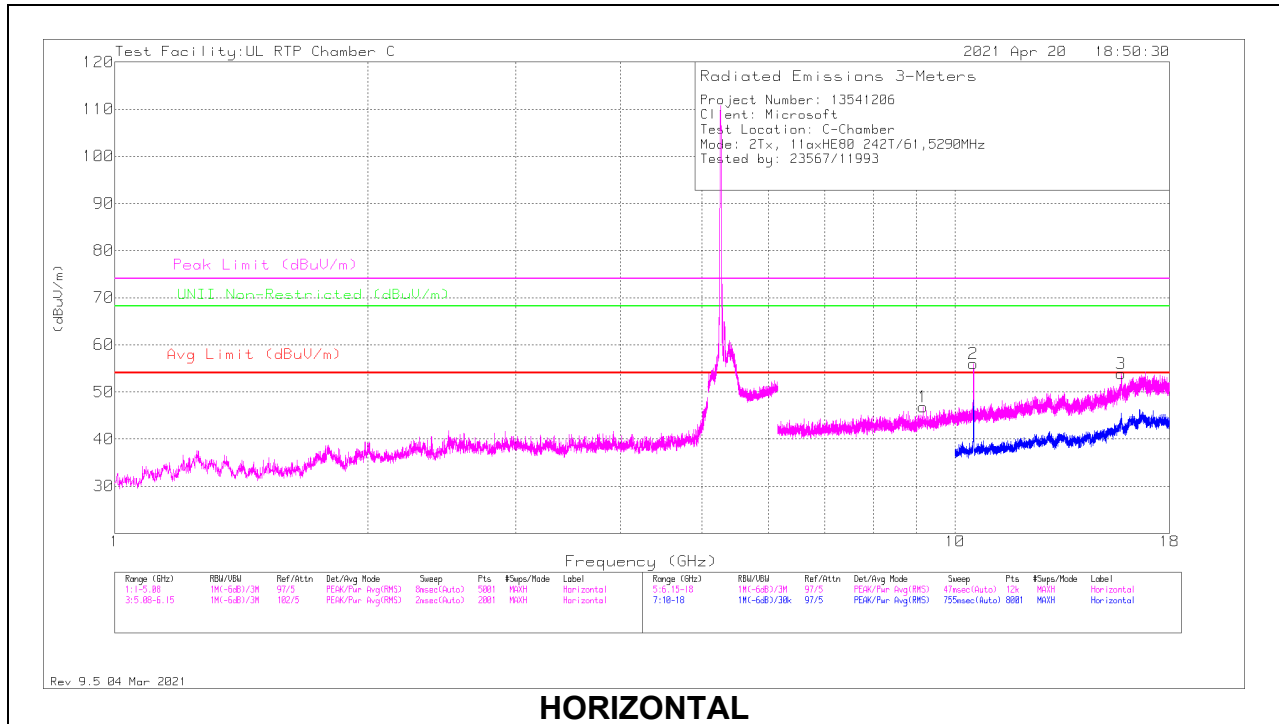

HORIZONTAL

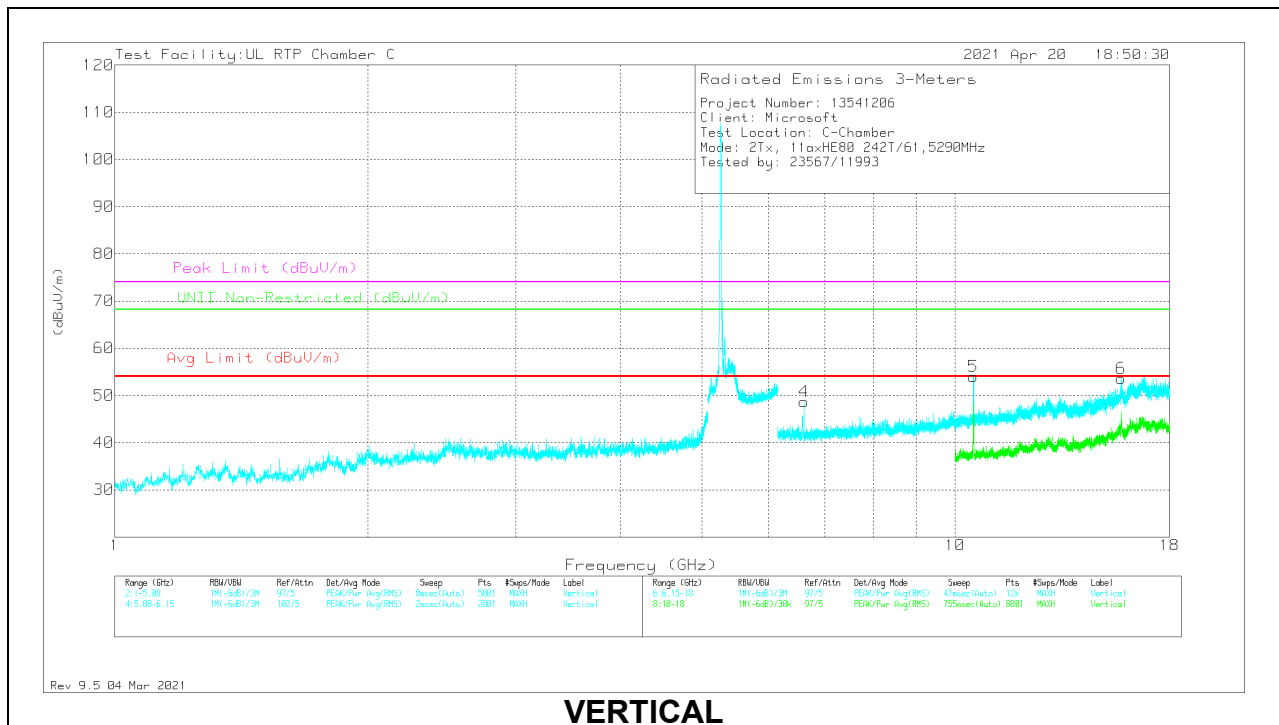

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 15.77266	48.48	PK-U	40.8	-33.9	55.38	-	-	74	-18.62	-	-	252	101	H
	* ** 15.7725	35.94	ADV	40.8	-33.9	42.84	54	-11.16	-	-	-	-	252	101	H
6	* ** 15.78163	51.85	PK-U	40.8	-34.8	57.85	-	-	74	-16.15	-	-	198	386	V
	* ** 15.7828	39.01	ADV	40.8	-34.8	45.01	54	-8.99	-	-	-	-	198	386	V
4	6.61263	64.07	PK-U	35.8	-45.4	54.47	-	-	-	-	68.2	-13.73	207	236	V
5	10.51938	61.42	PK-U	37.8	-40.5	58.72	-	-	-	-	68.2	-9.48	256	243	V
2	10.51984	61.6	PK-U	37.8	-40.5	58.9	-	-	-	-	68.2	-9.3	114	187	H
1	* ** 9.16978	52.28	Pk	36.4	-41.9	46.78	54	-7.22	74	-27.22	-	-	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 59

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

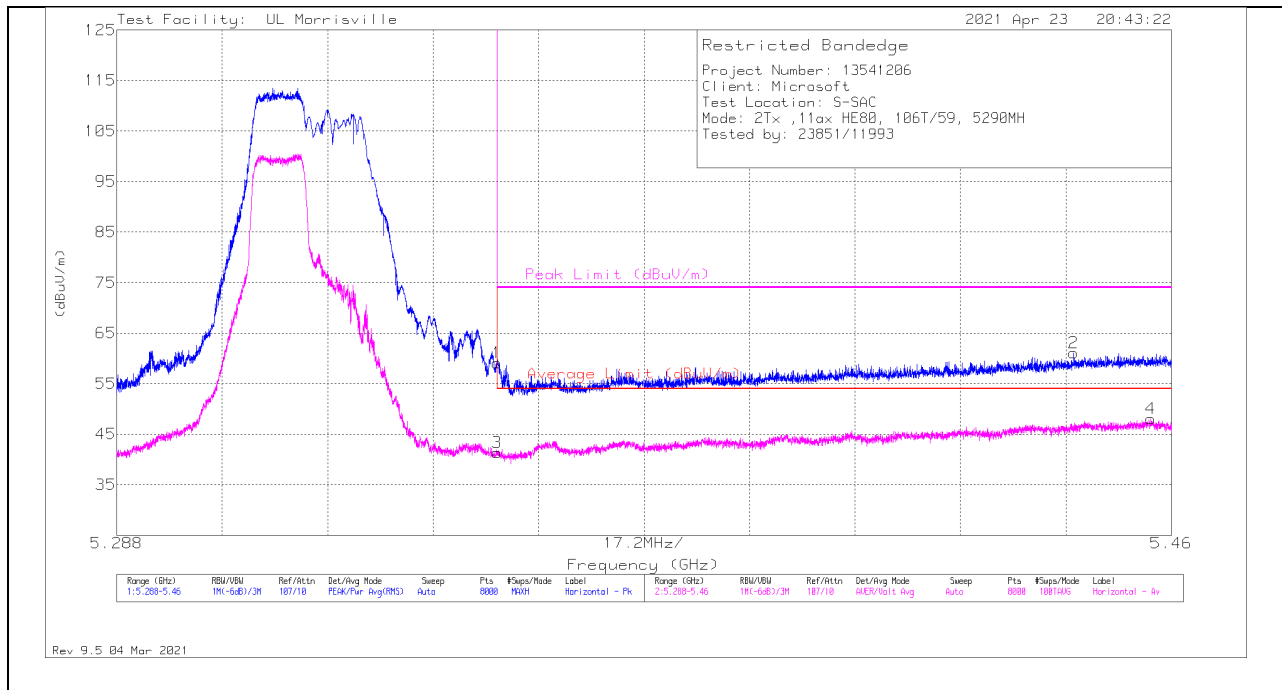

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	47.78	Pk	34.5	-23.2	59.08	-	-	74	-14.92	25	242	H
2	*** 5.44409	50.03	PK	34.5	-23.4	61.13	-	-	74	-12.87	25	242	H
3	*** 5.35001	30.02	ADV	34.5	-23.2	41.32	54	-12.68	-	-	25	242	H
4	*** 5.45663	37.02	ADV	34.5	-23.5	48.02	54	-5.98	-	-	25	242	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

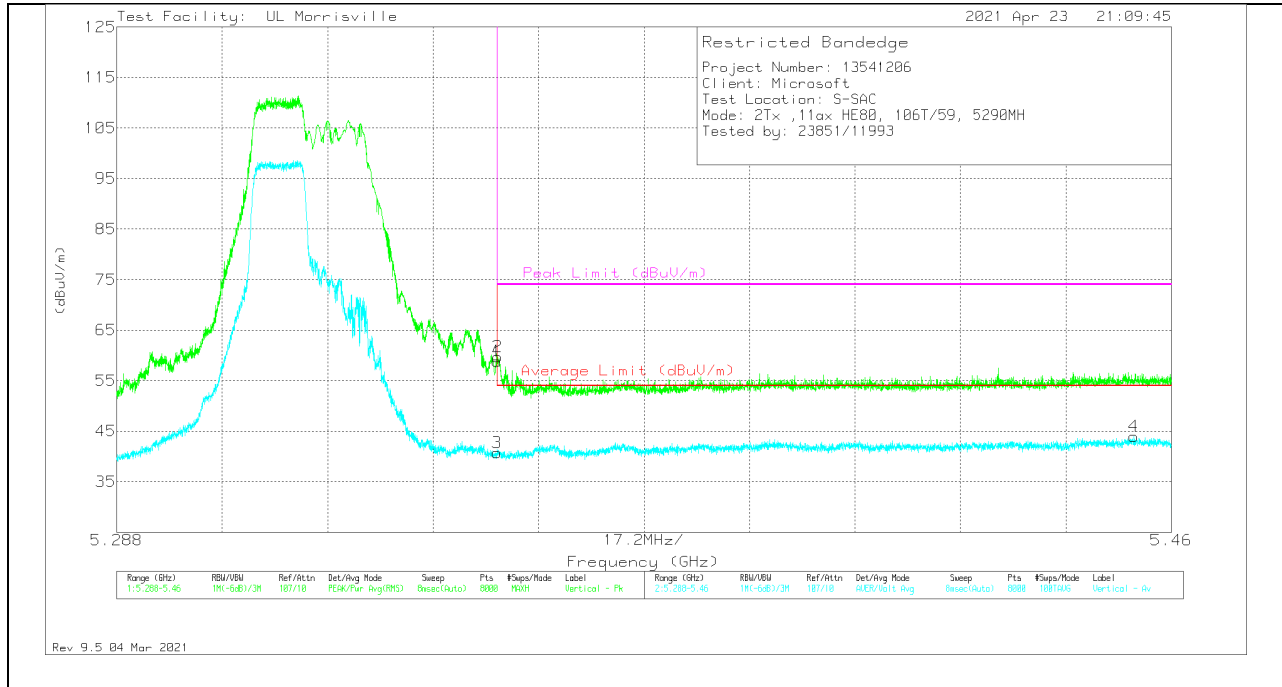

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	47.56	Pk	34.5	-23.2	58.86	-	-	74	-15.14	133	257	V
2	* ** 5.35012	48.45	Pk	34.5	-23.2	59.75	-	-	74	-14.25	133	257	V
3	* ** 5.35001	29.45	ADV	34.5	-23.2	40.75	54	-13.25	-	-	133	257	V
4	* ** 5.45387	32.85	ADV	34.5	-23.4	43.95	54	-10.05	-	-	133	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 106-Tones, RU Index 60

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

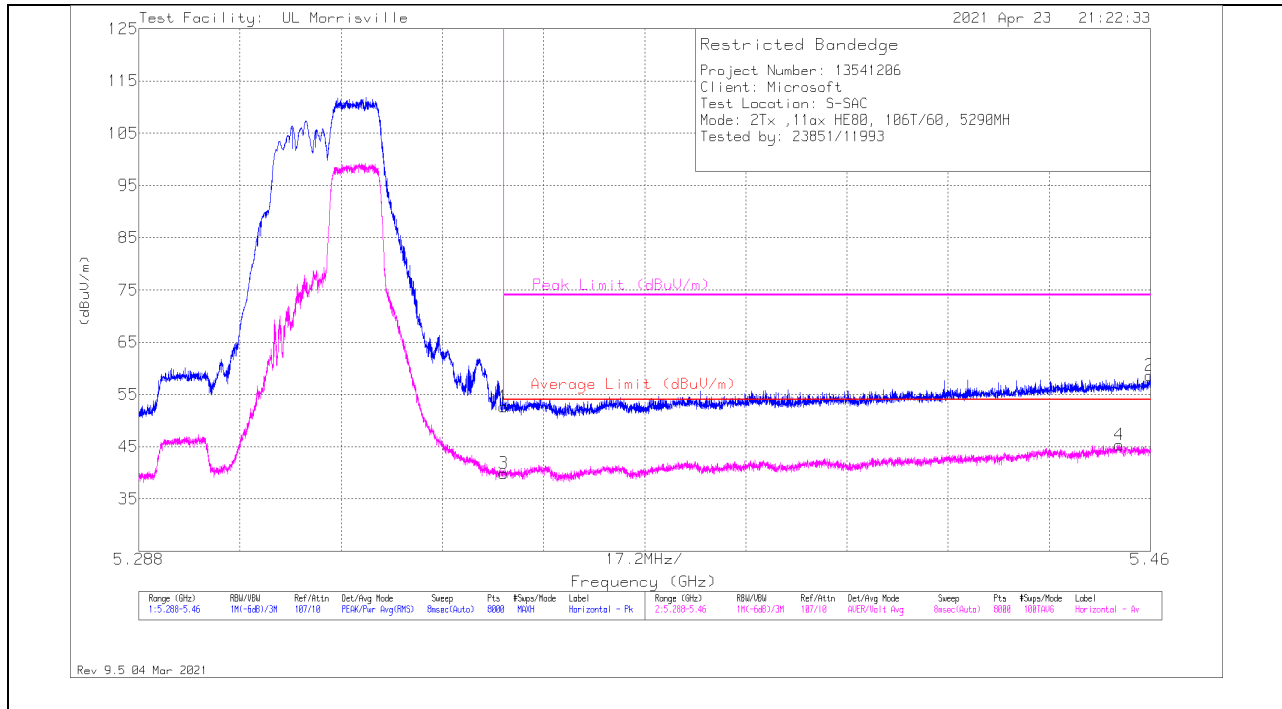

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	41.4	Pk	34.5	-23.2	52.7	-	-	74	-21.3	1	261	H
2	** * 5.4599	47.62	Pk	34.5	-23.5	58.62	-	-	74	-15.38	1	261	H
3	** * 5.35001	28.53	ADV	34.5	-23.2	39.83	54	-14.17	-	-	1	261	H
4	** * 5.45471	34.37	ADV	34.5	-23.5	45.37	54	-8.63	-	-	1	261	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

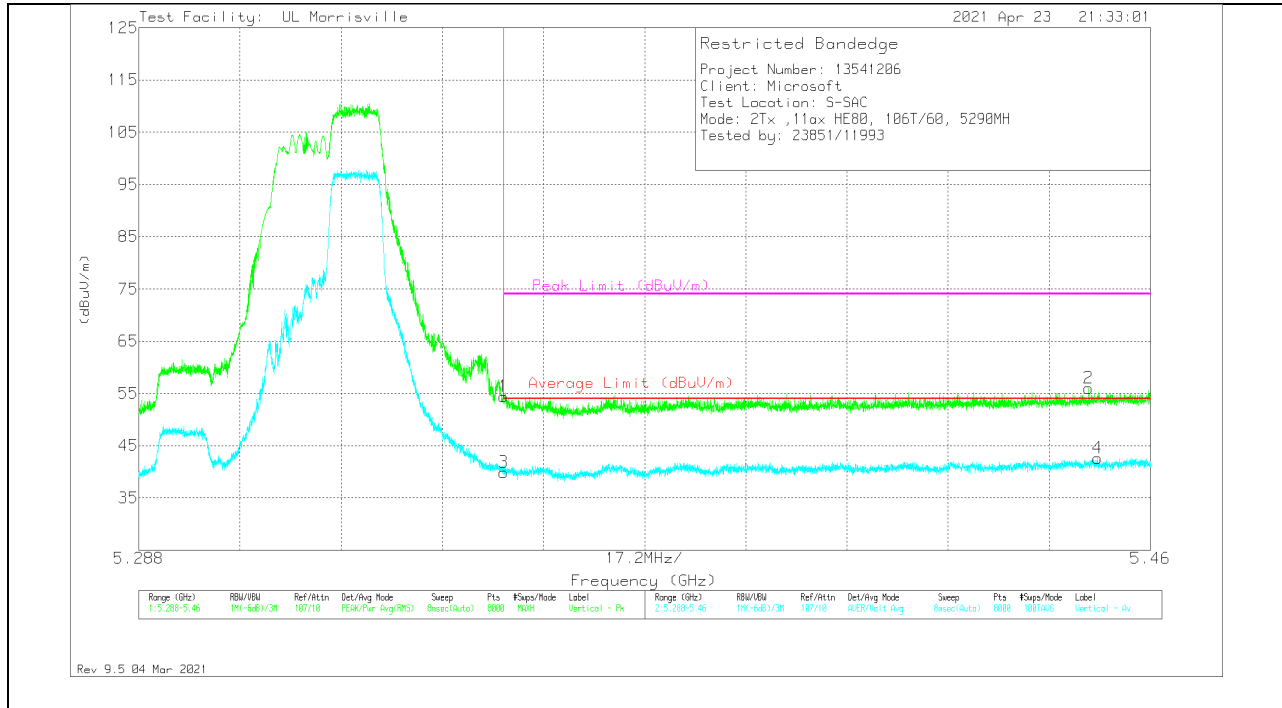


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	43.13	PK	34.5	-23.2	54.43	-	-	74	-19.57	123	225	V
2	*** 5.44949	44.91	PK	34.5	-23.4	56.01	-	-	74	-17.99	123	225	V
3	*** 5.35001	28.54	ADV	34.5	-23.2	39.84	54	-14.16	-	-	123	225	V
4	*** 5.45097	31.5	ADV	34.5	-23.4	42.6	54	-11.4	-	-	123	225	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 52-Tones, RU Index 52

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

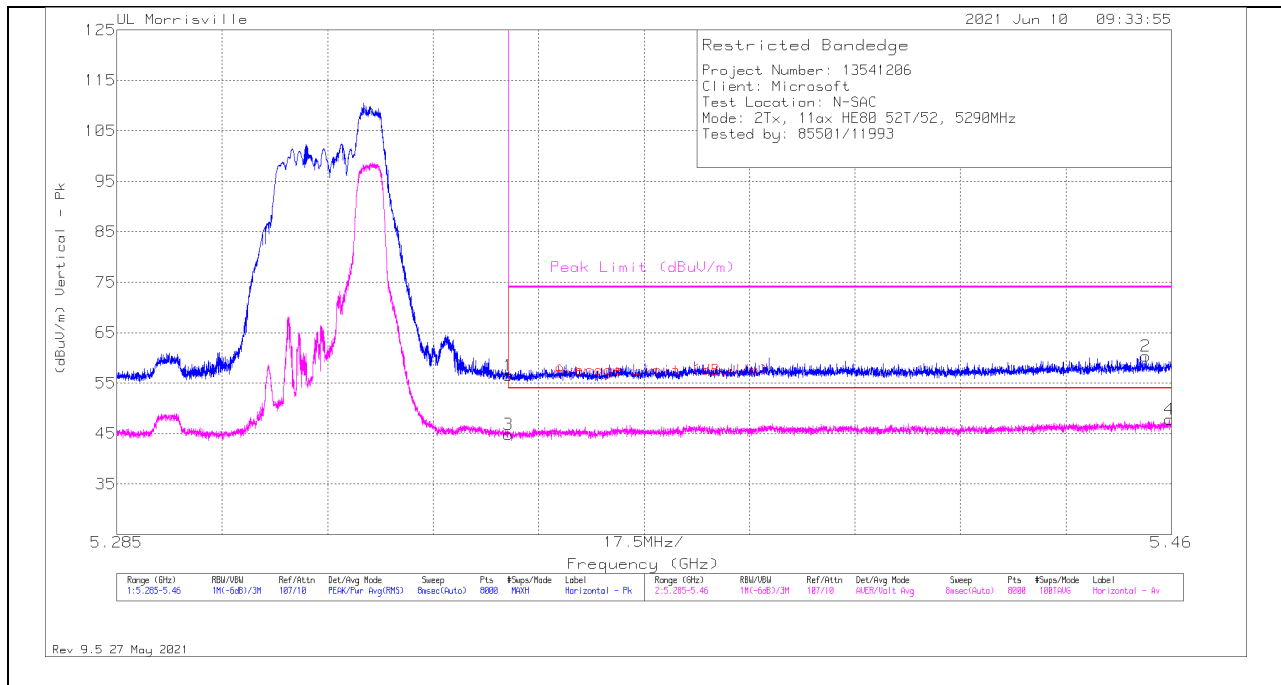

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.15	Pk	34.5	-10.1	56.55	-	-	74	-17.45	18	121	H
2	*** 5.45576	35.77	Pk	34.4	-9.8	60.37	-	-	74	-13.63	18	121	H
3	*** 5.35002	20.4	ADV	34.5	-10.1	44.8	54	-9.2	-	-	18	121	H
4	*** 5.45965	23.12	ADV	34.4	-9.7	47.82	54	-6.18	-	-	18	121	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

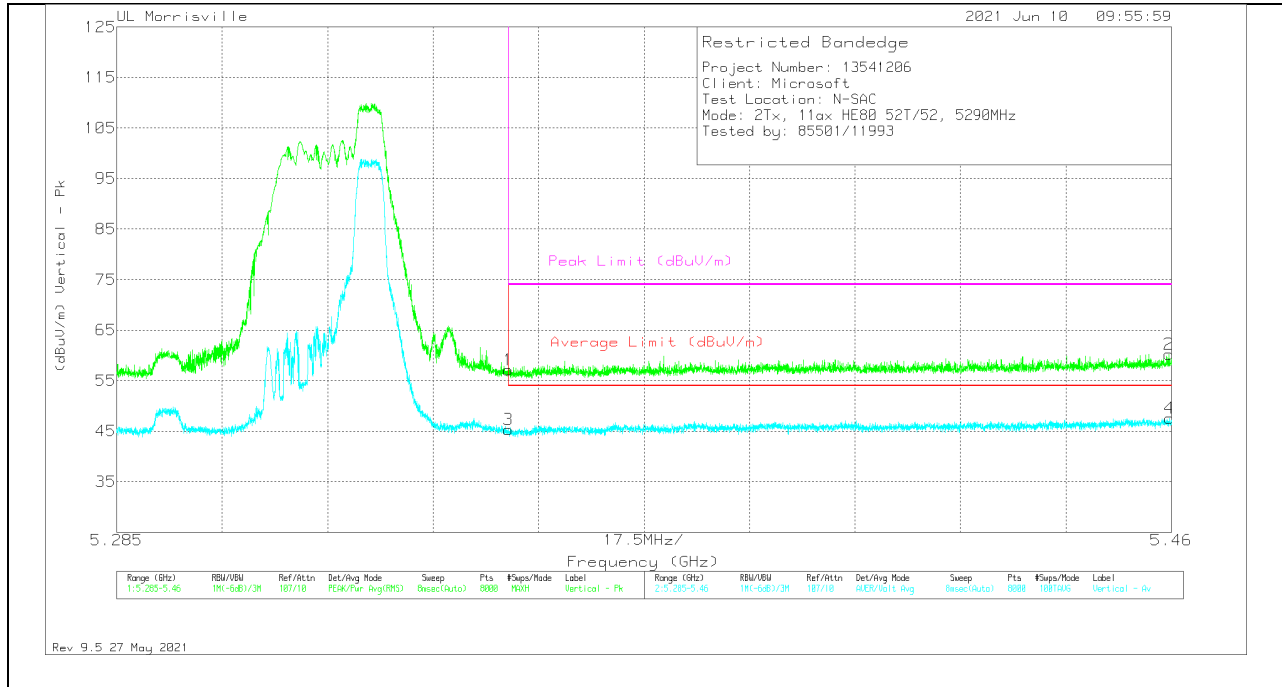

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.68	Pk	34.5	-10.1	57.08	-	-	74	-16.92	22	321	V
2	*** 5.45961	35.53	Pk	34.4	-9.7	60.23	-	-	74	-13.77	22	321	V
3	*** 5.35002	20.96	ADV	34.5	-10.1	45.36	54	-8.64	-	-	22	321	V
4	*** 5.4597	22.9	ADV	34.4	-9.7	47.6	54	-6.4	-	-	22	321	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

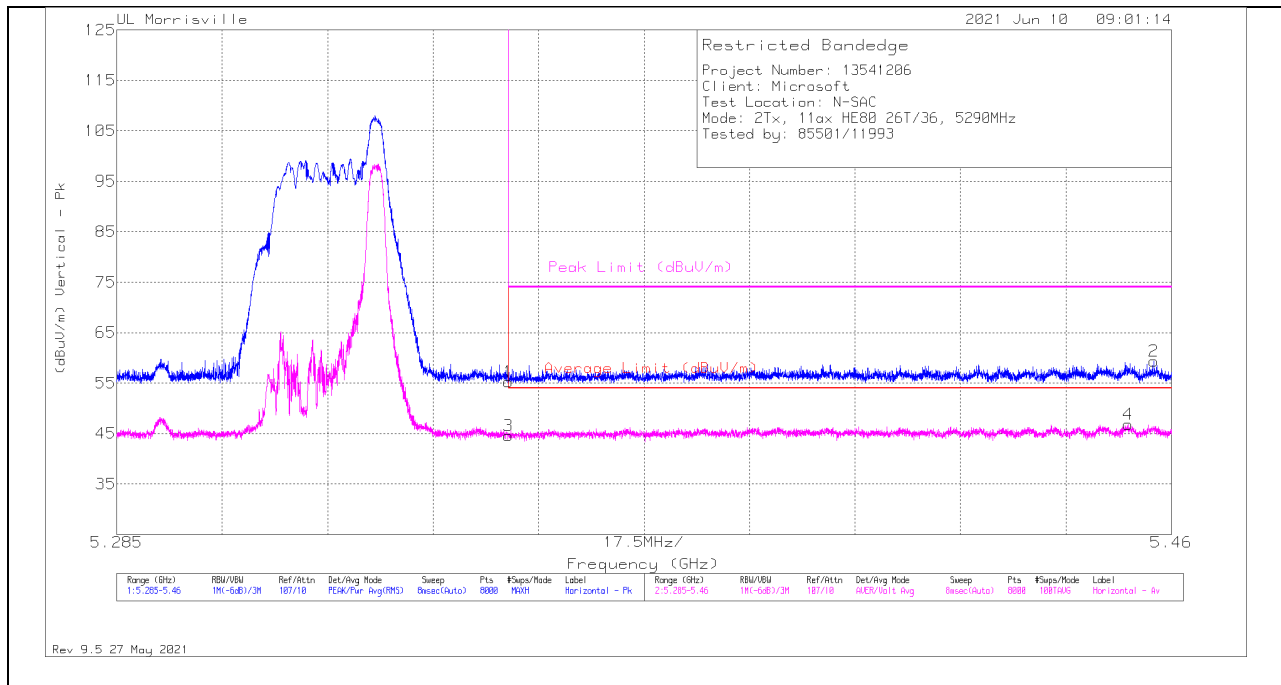

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	30.89	Pk	34.5	-10.1	55.29	-	-	74	-18.71	321	100	H
2	*** 5.45709	34.73	Pk	34.4	-9.8	59.33	-	-	74	-14.67	321	100	H
3	*** 5.35002	20.17	ADV	34.5	-10.1	44.57	54	-9.43	-	-	321	100	H
4	*** 5.4528	22.23	ADV	34.4	-9.8	46.83	54	-7.17	-	-	321	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

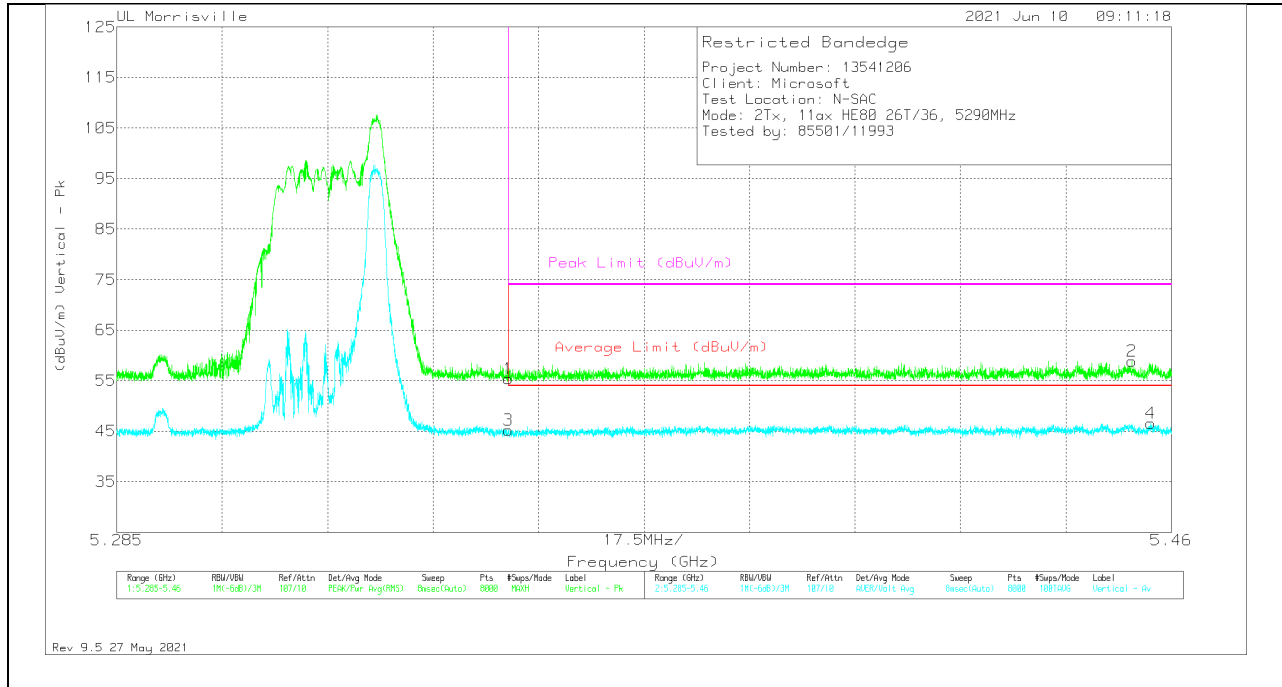

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	30.97	Pk	34.5	-10.1	55.37	-	-	74	-18.63	30	186	V
2	*** 5.45346	34.31	Pk	34.4	-9.8	58.91	-	-	74	-15.09	30	186	V
3	*** 5.35002	20.84	ADV	34.5	-10.1	45.24	54	-8.76	-	-	30	186	V
4	*** 5.45661	21.98	ADV	34.4	-9.8	46.58	54	-7.42	-	-	30	186	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

MID

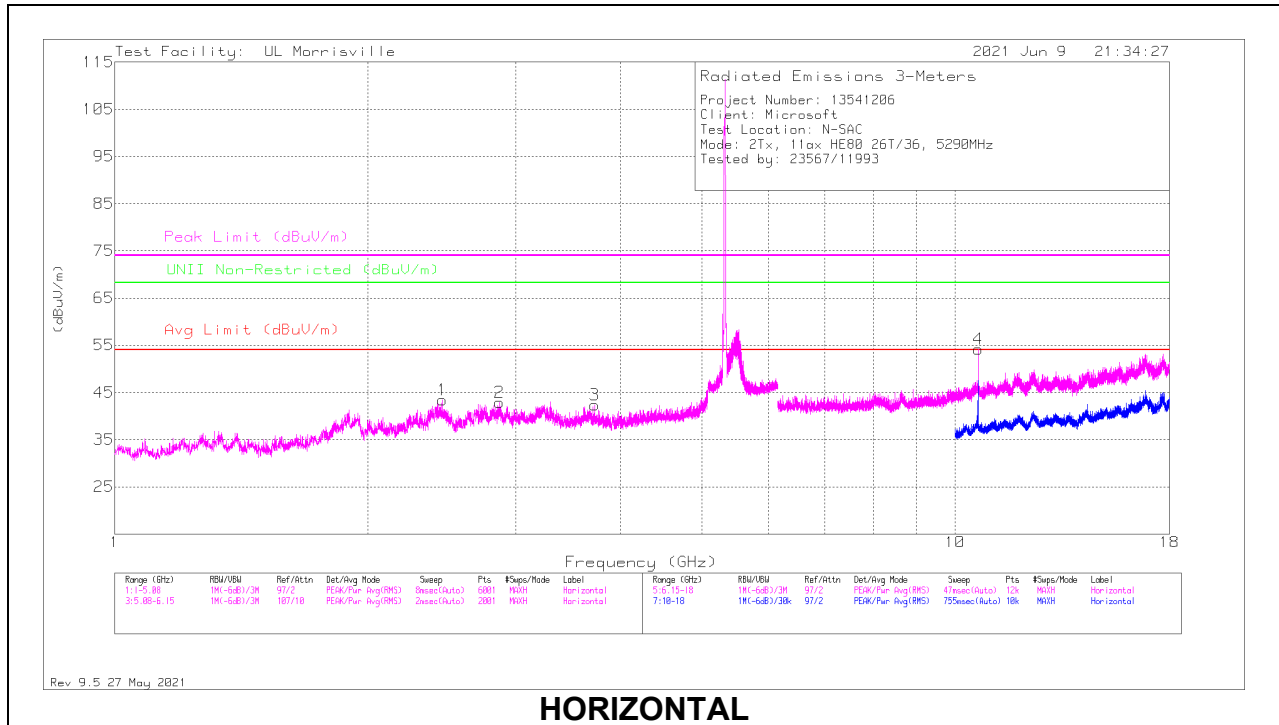

HORIZONTAL

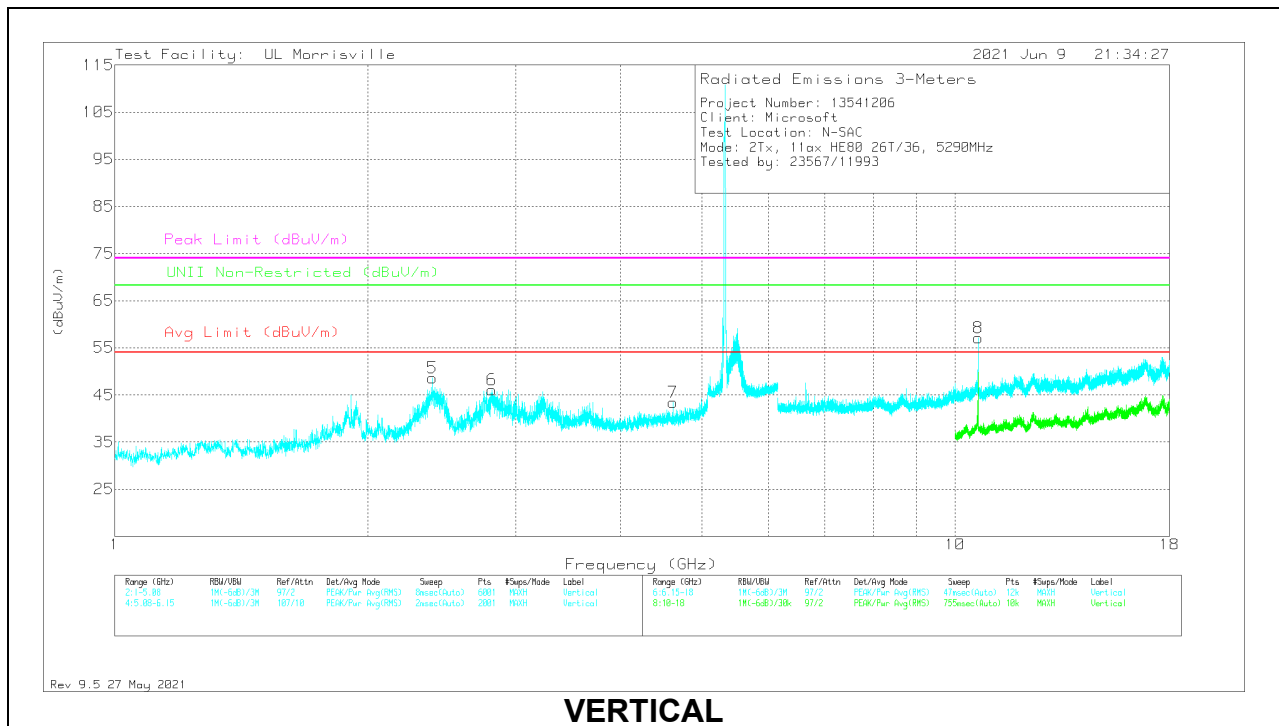

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* ** 2.38743	54.37	PK-U	31.8	-34.1	52.07	-	-	74	-21.93	-	-	29	252	V
	* ** 2.38939	42.18	ADV	31.8	-34.1	39.88	54	-14.12	-	-	-	-	29	252	V
4	* ** 10.65492	45.83	PK-U	37.7	-25.7	57.83	-	-	74	-16.17	-	-	31	115	H
	* ** 10.65608	34.51	ADV	37.7	-25.7	46.51	54	-7.49	-	-	-	-	31	115	H
8	* ** 10.65489	49.18	PK-U	37.7	-25.7	61.18	-	-	74	-12.82	-	-	15	168	V
	* ** 10.65613	37.44	ADV	37.7	-25.7	49.44	54	-4.56	-	-	-	-	15	168	V
2	* ** 2.86796	44.22	PK	32.5	-33.8	42.92	54	-11.08	74	-31.08	-	-	0-360	101	H
3	* ** 3.72408	41.8	PK	33.4	-32.9	42.3	54	-11.7	74	-31.7	-	-	0-360	199	H
6	* ** 2.81356	47.4	PK	32.6	-33.9	46.1	54	-7.9	74	-27.9	-	-	0-360	200	V
7	* ** 4.61624	41.24	PK	34	-31.8	43.44	54	-10.56	74	-30.56	-	-	0-360	101	V
1	2.45452	45.16	PK	32.3	-34.1	43.36	-	-	-	-	68.2	-24.84	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 PK-U - U-NII: Maximum Peak
 ADV - U-NII AD primary method, Linear Voltage Average
 PK - Peak detector


2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 0

HARMONICS AND SPURIOUS EMISSIONS

MID

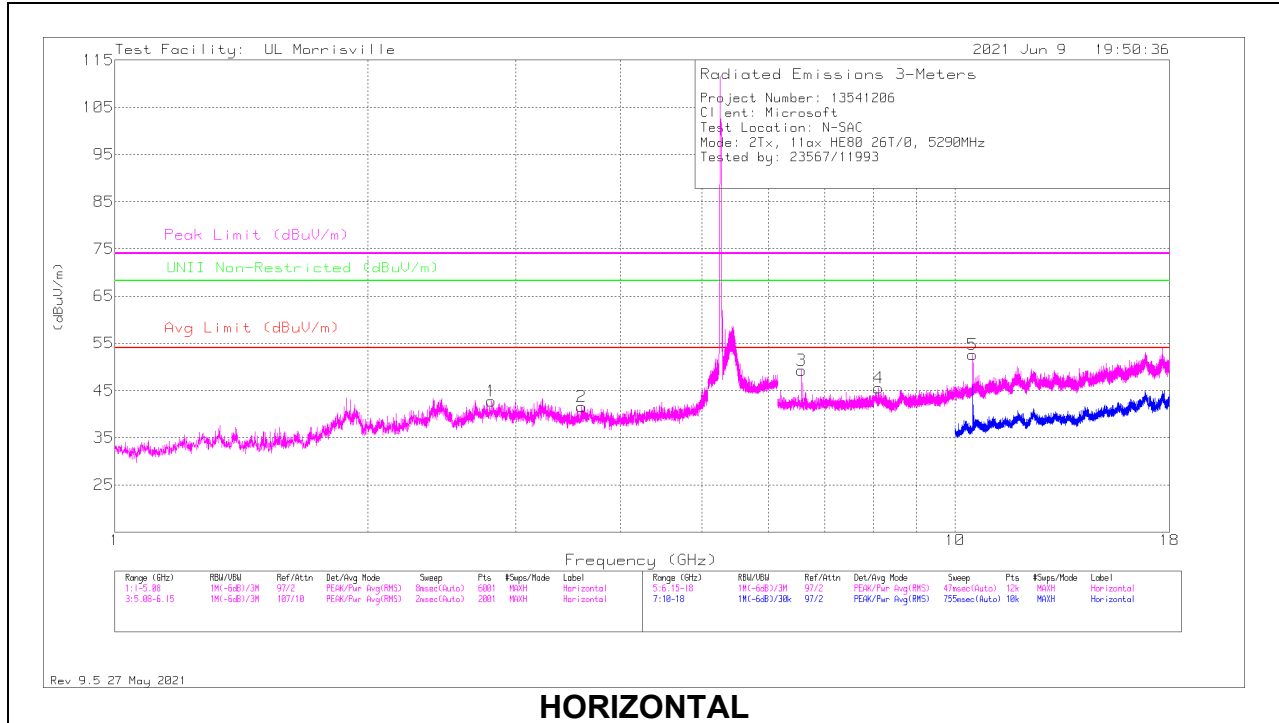

HORIZONTAL

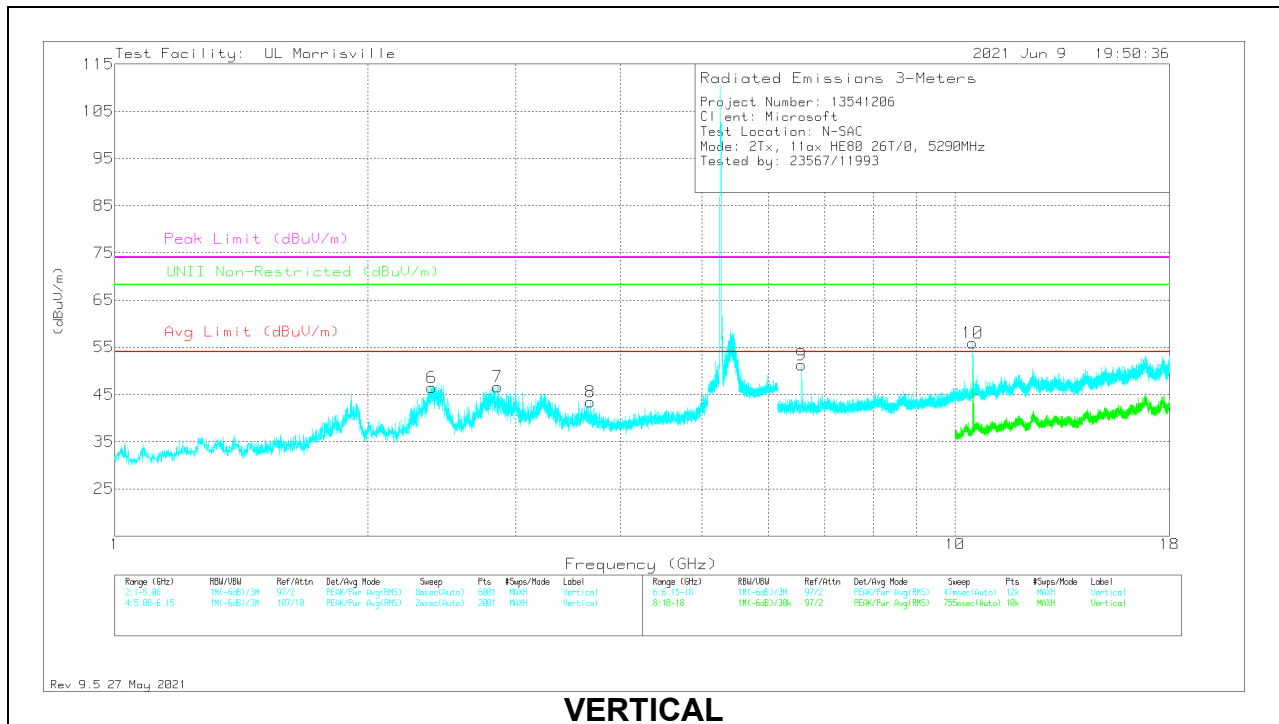

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.80744	43.95	Pk	32.6	-33.8	42.75	54	-11.25	74	-31.25	-	-	0-360	199	H
2	*** 3.59284	40.39	Pk	33.3	-32.1	41.59	54	-12.41	74	-32.41	-	-	0-360	101	H
6	*** 2.38244	48.77	Pk	31.8	-34.1	46.47	54	-7.53	74	-27.53	-	-	0-360	200	V
7	*** 2.8564	47.92	Pk	32.4	-33.7	46.62	54	-7.38	74	-27.38	-	-	0-360	200	V
8	*** 3.67988	42.57	Pk	33.3	-32.5	43.37	54	-10.63	74	-30.63	-	-	0-360	200	V
4	*** 8.10624	38.41	Pk	35.9	-28.8	45.51	54	-8.49	74	-28.49	-	-	0-360	199	H
3	6.56999	46.73	PK-U	35.7	-30.7	51.73	-	-	74	-22.27	68.2	-16.47	315	193	H
9	6.56968	50.07	PK-U	35.7	-30.7	55.07	-	-	74	-18.93	68.2	-13.13	316	218	V
10	10.50445	49.39	PK-U	37.5	-27.2	59.69	-	-	74	-14.31	68.2	-8.51	15	196	V
5	10.50505	46.3	PK-U	37.5	-27.2	56.6	-	-	74	-17.4	68.2	-11.6	17	307	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average


2TX Antenna A + Antenna B OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

MID

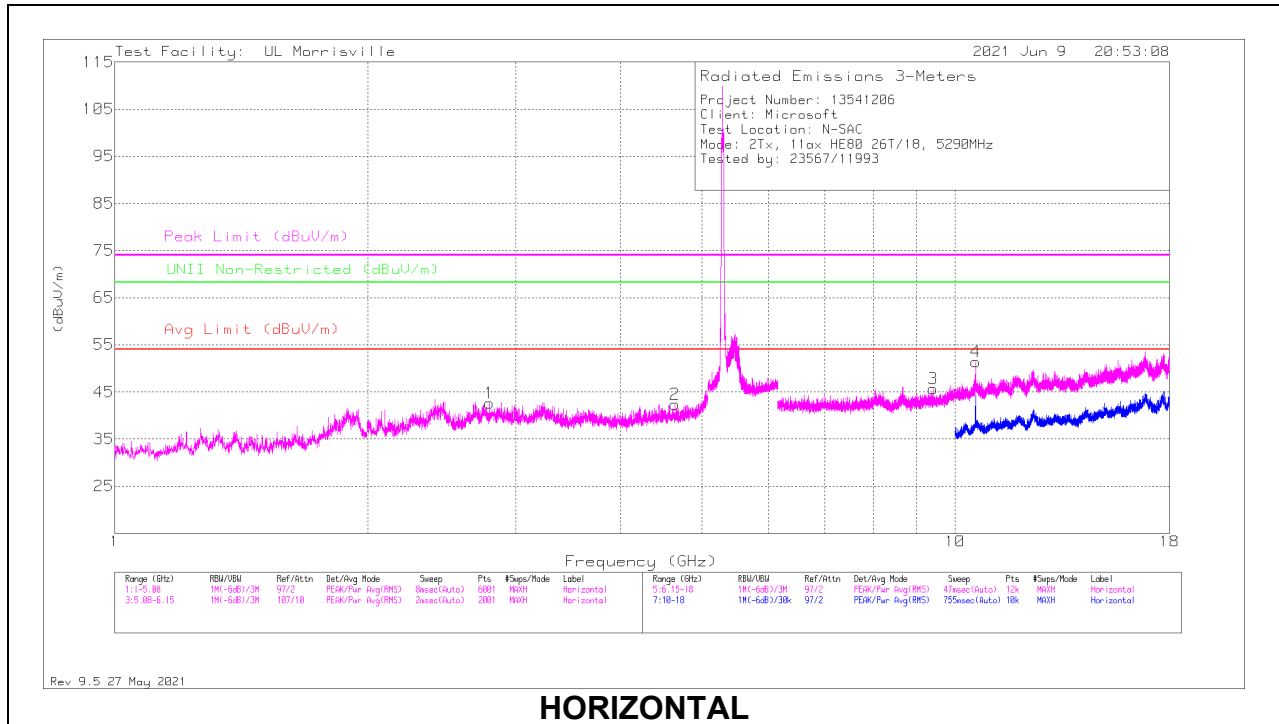

HORIZONTAL

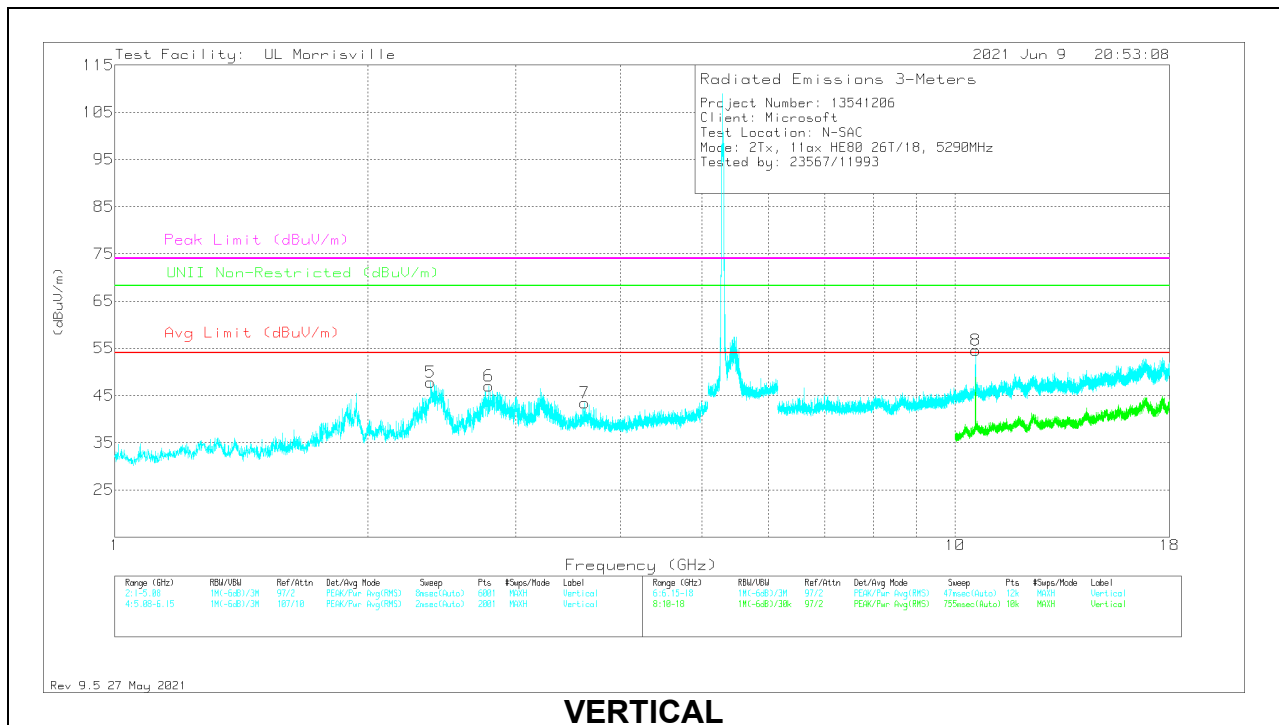

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.79384	43.69	Pk	32.7	-33.8	42.59	54	-11.41	74	-31.41	-	-	0-360	200	H
2	* ** 4.6414	39.66	Pk	33.9	-31.2	42.36	54	-11.64	74	-31.64	-	-	0-360	101	H
5	* ** 2.377	50.16	Pk	31.8	-34.2	47.76	54	-6.24	74	-26.24	-	-	0-360	200	V
6	* ** 2.78602	48.21	Pk	32.7	-33.9	47.01	54	-6.99	74	-26.99	-	-	0-360	200	V
7	* ** 3.62616	41.91	Pk	33.4	-31.9	43.41	54	-10.59	74	-30.59	-	-	0-360	200	V
3	* ** 9.41863	38.18	Pk	36.3	-28.8	45.68	54	-8.32	74	-28.32	-	-	0-360	101	H
4	10.58128	43.24	PK-U	37.6	-26	54.84	-	-	74	-19.16	68.2	-13.36	32	111	H
8	10.58175	45.61	PK-U	37.6	-26	57.21	-	-	74	-16.79	68.2	-10.99	16	138	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

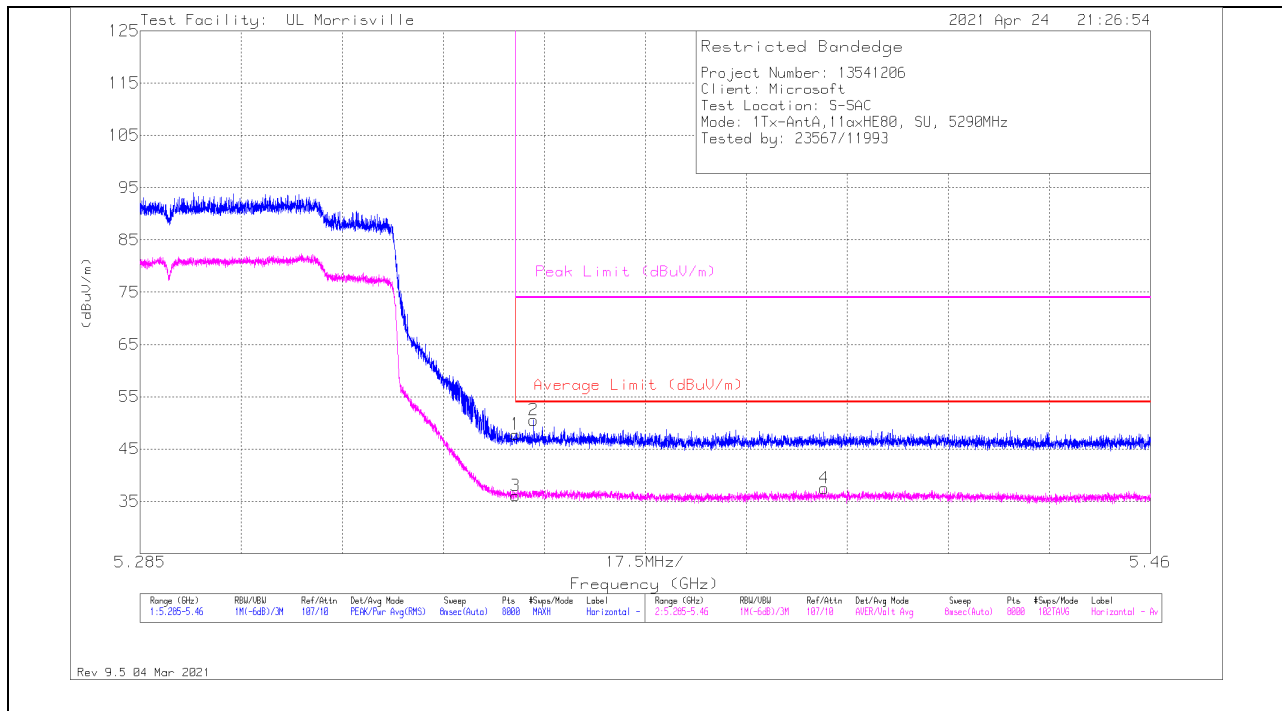

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	36.48	Pk	34.5	-23.2	0	47.78	-	-	74	-26.22	319	138	H
2	* ** 5.35313	39.23	Pk	34.5	-23.2	0	50.53	-	-	74	-23.47	319	138	H
3	* ** 5.35002	24.53	ADV	34.5	-23.2	.24	36.07	54	-17.93	-	-	319	138	H
4	* ** 5.40347	26.05	ADV	34.5	-23.3	.24	37.49	54	-16.51	-	-	319	138	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

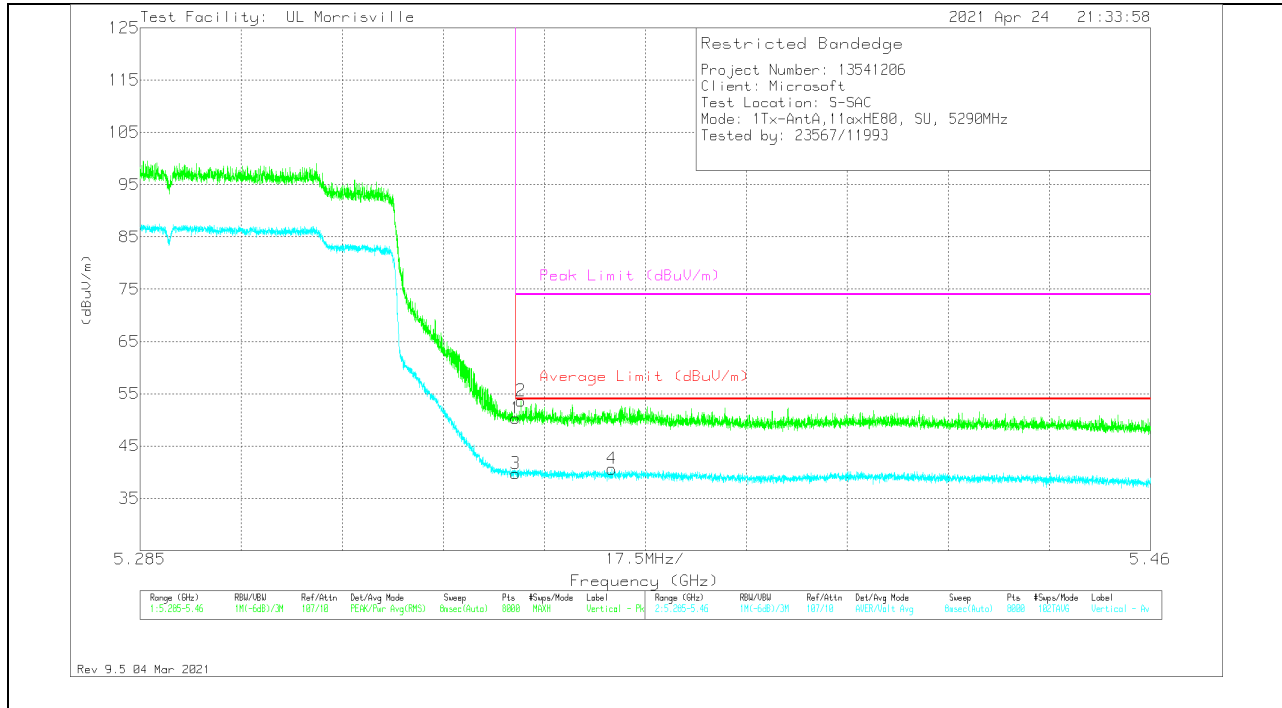


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	39	Pk	34.5	-23.2	0	50.3	-	-	74	-23.7	212	263	V
2	* ** 5.35094	42.33	Pk	34.5	-23.2	0	53.63	-	-	74	-20.37	212	263	V
3	* ** 5.35002	28.2	ADV	34.5	-23.2	.24	39.74	54	-14.26	-	-	212	263	V
4	* ** 5.36671	29.1	ADV	34.5	-23.2	.24	40.64	54	-13.36	-	-	212	263	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

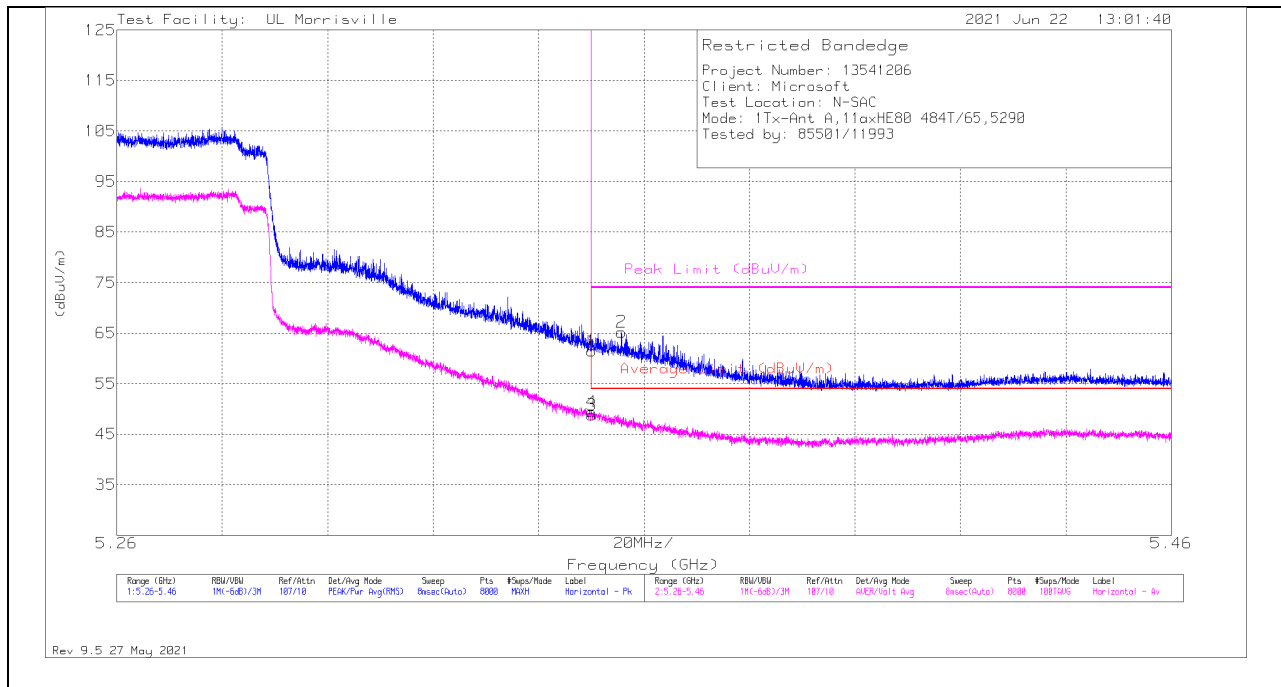

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	49.94	Pk	34.6	-23.1	61.44	-	-	74	-12.56	135	203	H
2	*** 5.35571	53.85	Pk	34.6	-23.2	65.25	-	-	74	-8.75	135	203	H
3	*** 5.35001	37.33	ADV	34.6	-23.1	48.83	54	-5.17	-	-	135	203	H
4	*** 5.35011	37.94	ADV	34.6	-23.1	49.44	54	-4.56	-	-	135	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

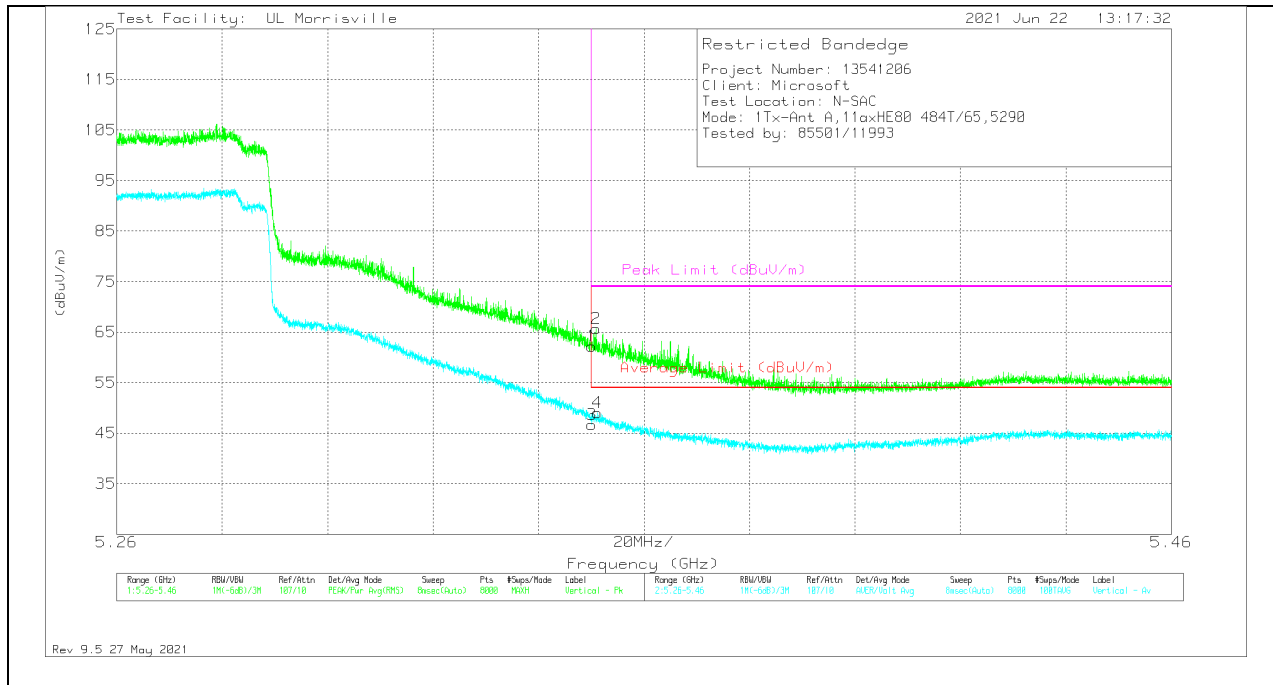

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	50.75	Pk	34.6	-23.1	62.25	-	-	74	-11.75	153	196	V
2	*** 5.35091	54.23	Pk	34.6	-23.2	65.63	-	-	74	-8.37	153	196	V
3	*** 5.35001	35.18	ADV	34.6	-23.1	46.68	54	-7.32	-	-	153	196	V
4	*** 5.35116	37.6	ADV	34.6	-23.2	49	54	-5	-	-	153	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: 484-Tones, RU Index 66

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

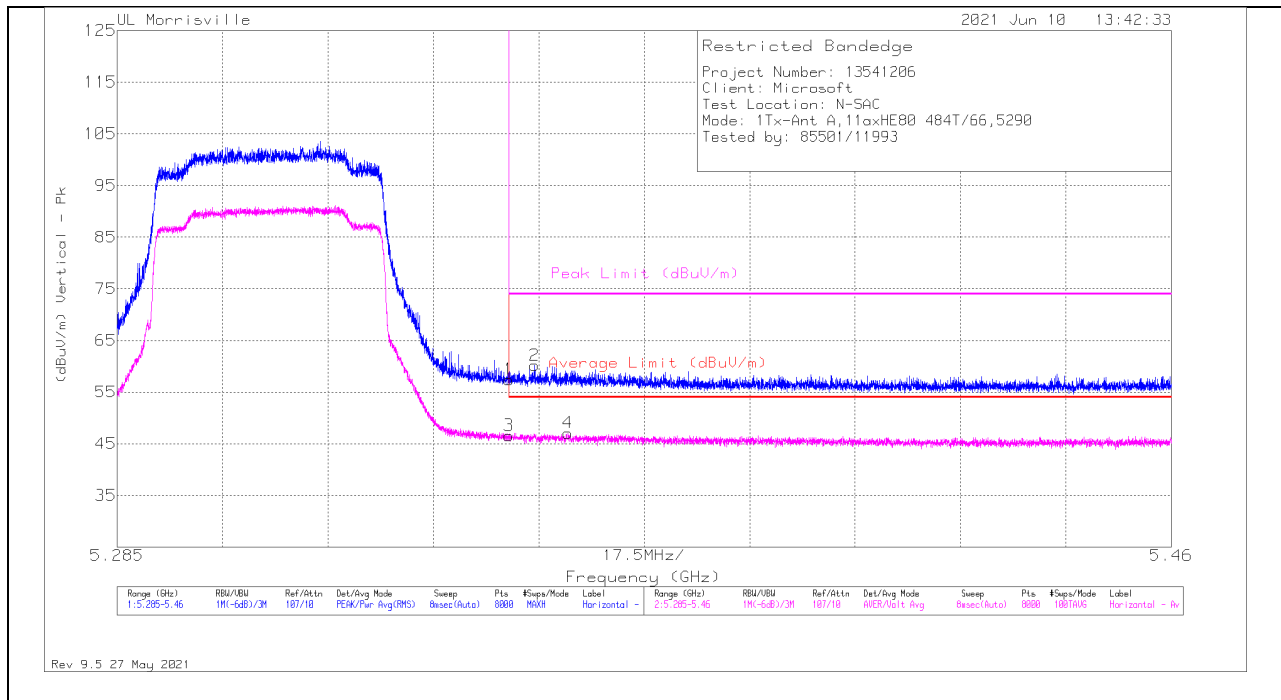

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	33.04	Pk	34.5	-10.1	57.44	-	-	74	-16.56	181	106	H
2	*** 5.35433	35.78	Pk	34.5	-10.1	60.18	-	-	74	-13.82	181	106	H
3	*** 5.35002	22.18	ADV	34.5	-10.1	46.58	54	-7.42	-	-	181	106	H
4	*** 5.35984	22.68	ADV	34.5	-10.1	47.08	54	-6.92	-	-	181	106	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

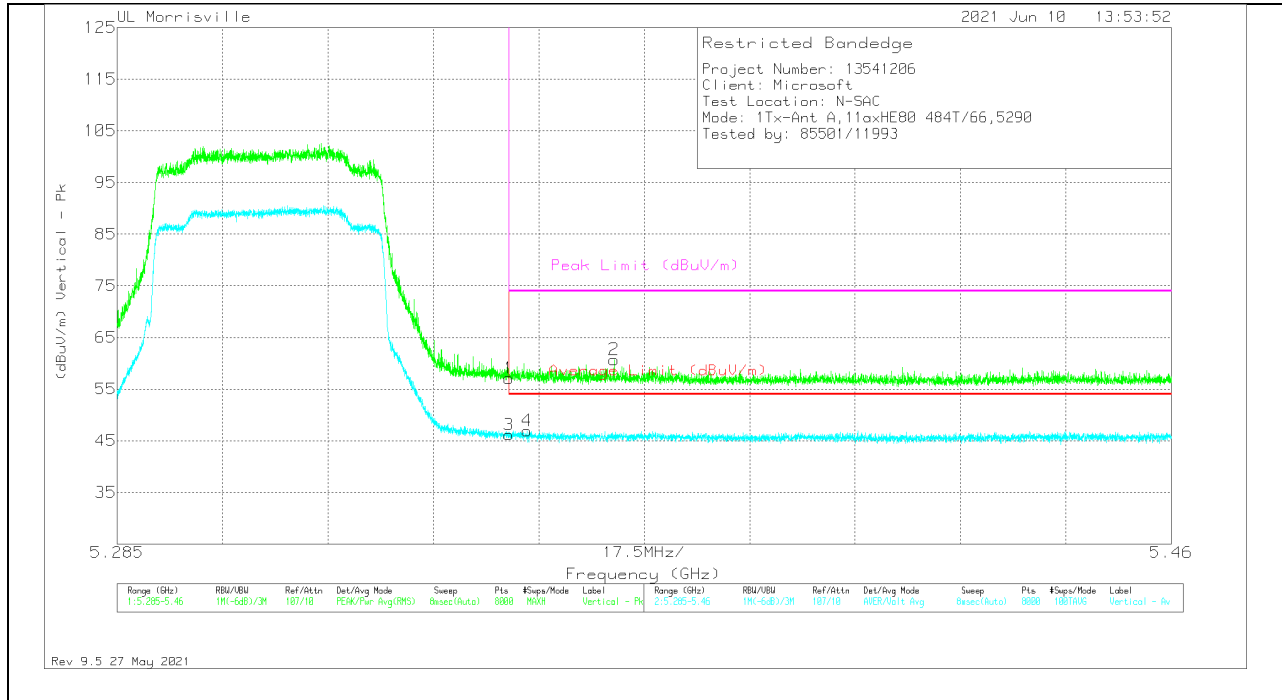

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.7	Pk	34.5	-10.1	57.1	-	-	74	-16.9	217	131	V
2	*** 5.36748	36.3	Pk	34.5	-10.1	60.7	-	-	74	-13.3	217	131	V
3	*** 5.35002	21.77	ADV	34.5	-10.1	46.17	54	-7.83	-	-	217	131	V
4	*** 5.35304	22.54	ADV	34.5	-10.1	46.94	54	-7.06	-	-	217	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 63

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

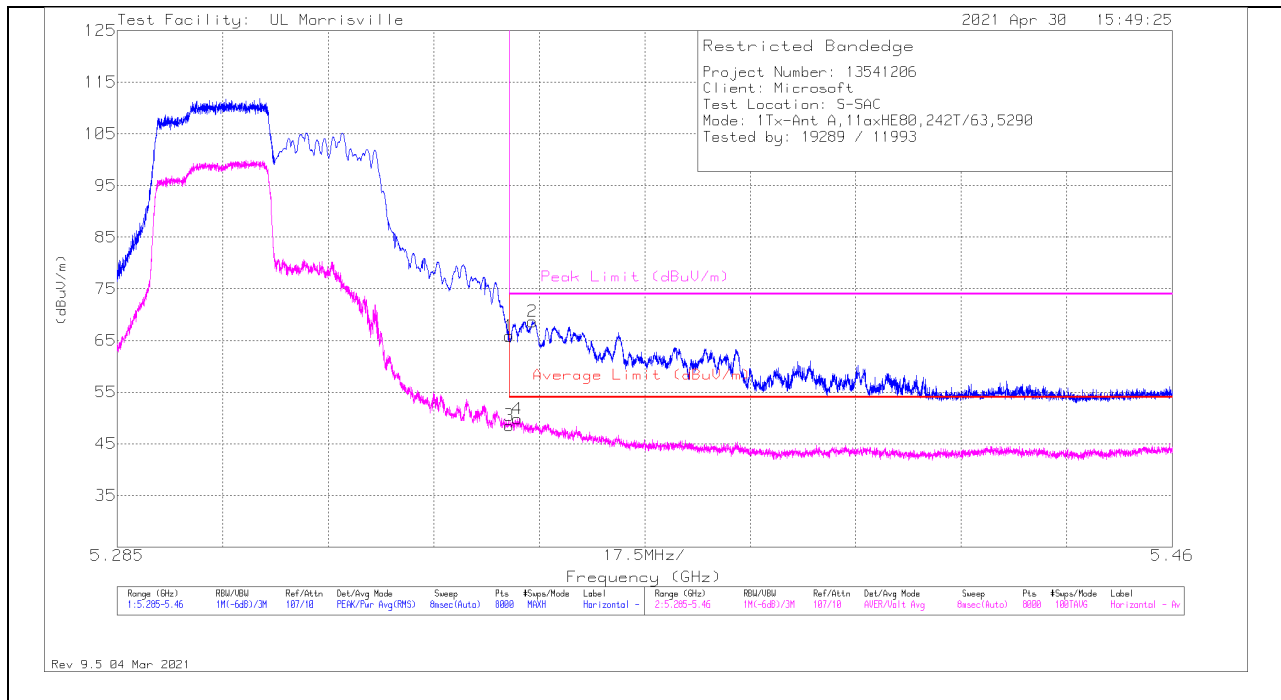

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	54.57	Pk	34.5	-23.2	65.87	-	-	74	-8.13	201	115	H
2	* ** 5.35389	57.37	Pk	34.5	-23.2	68.67	-	-	74	-5.33	201	115	H
3	* ** 5.35002	37.2	ADV	34.5	-23.2	48.5	54	-5.5	-	-	201	115	H
4	* ** 5.35138	38.53	ADV	34.5	-23.2	49.83	54	-4.17	-	-	201	115	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

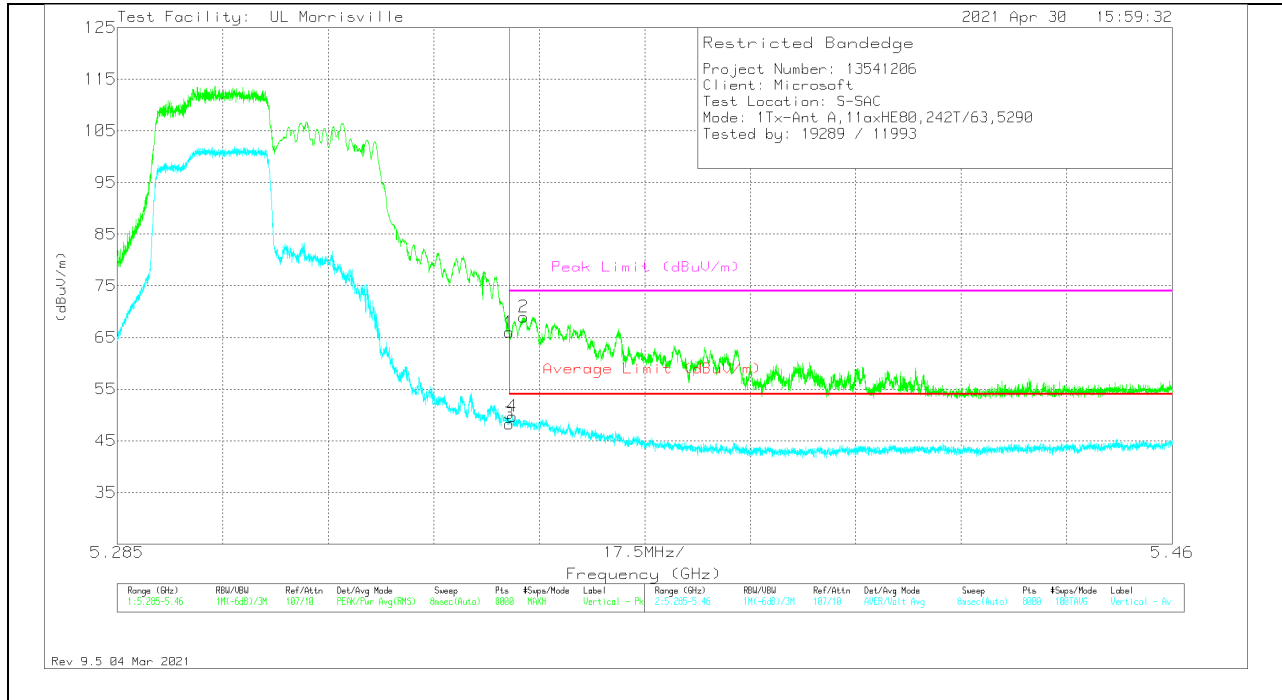


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	54.73	Pk	34.5	-23.2	66.03	-	-	74	-7.97	183	236	V
2	*** 5.35243	57.69	PK	34.5	-23.2	68.99	-	-	74	-5.01	183	236	V
3	*** 5.35002	37	ADV	34.5	-23.2	48.3	54	-5.7	-	-	183	236	V
4	*** 5.35052	38.42	ADV	34.5	-23.2	49.72	54	-4.28	-	-	183	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 64

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

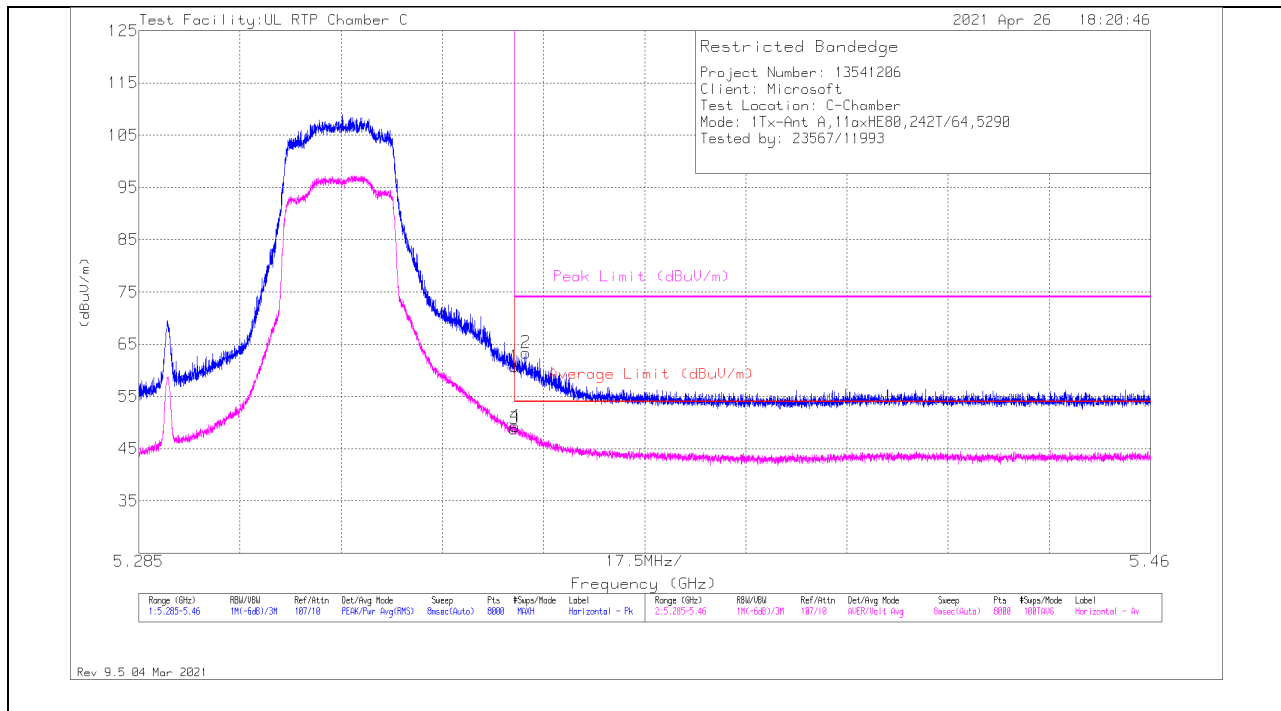

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	39.22	Pk	34.7	-13.2	60.72	-	-	74	-13.28	87	204	H
2	* ** 5.35197	41.99	Pk	34.7	-13.3	63.39	-	-	74	-10.61	87	204	H
3	* ** 5.35002	27.26	ADV	34.7	-13.2	48.76	54	-5.24	-	-	87	204	H
4	* ** 5.35013	27.78	ADV	34.7	-13.2	49.28	54	-4.72	-	-	87	204	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

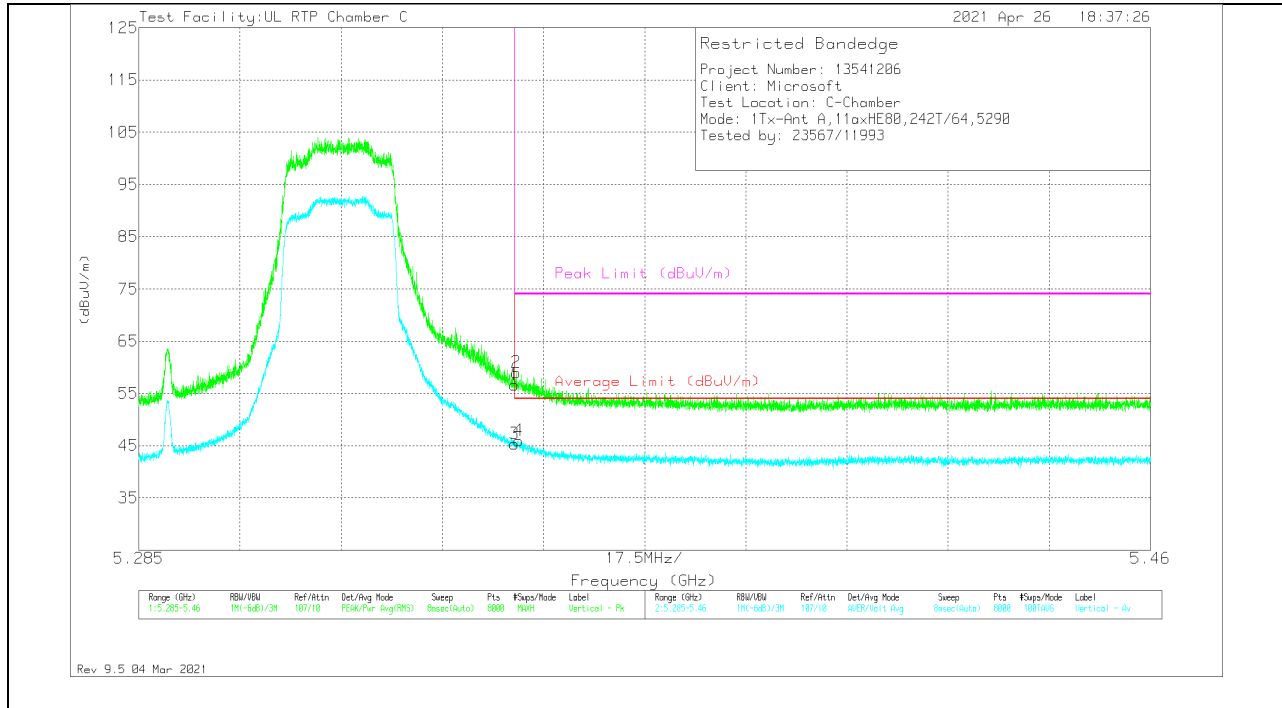


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	35.17	PK	34.7	-13.2	56.67	-	-	74	-17.33	17	208	V
2	*** 5.35031	37.5	PK	34.7	-13.2	59	-	-	74	-15	17	208	V
3	*** 5.35002	23.77	ADV	34.7	-13.2	45.27	54	-8.73	-	-	17	208	V
4	*** 5.35068	24.49	ADV	34.7	-13.2	45.99	54	-8.01	-	-	17	208	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - U-NII AD primary method, Linear Voltage Average

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 59

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

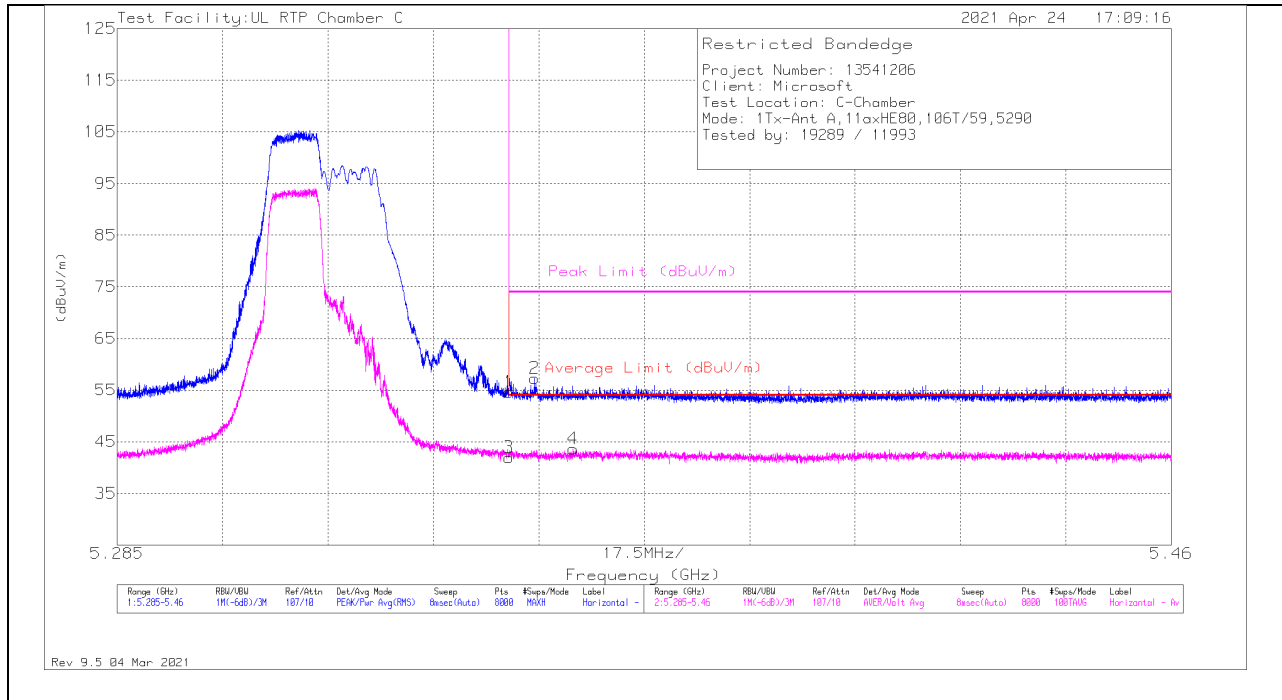

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	33.15	Pk	34.7	-13.2	54.65	-	-	74	-19.35	114	265	H
2	* ** 5.35427	35.98	Pk	34.7	-13.4	57.28	-	-	74	-16.72	114	265	H
3	* ** 5.35002	20.44	ADV	34.7	-13.2	41.94	54	-12.06	-	-	114	265	H
4	* ** 5.3607	22.35	ADV	34.7	-13.4	43.65	54	-10.35	-	-	114	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

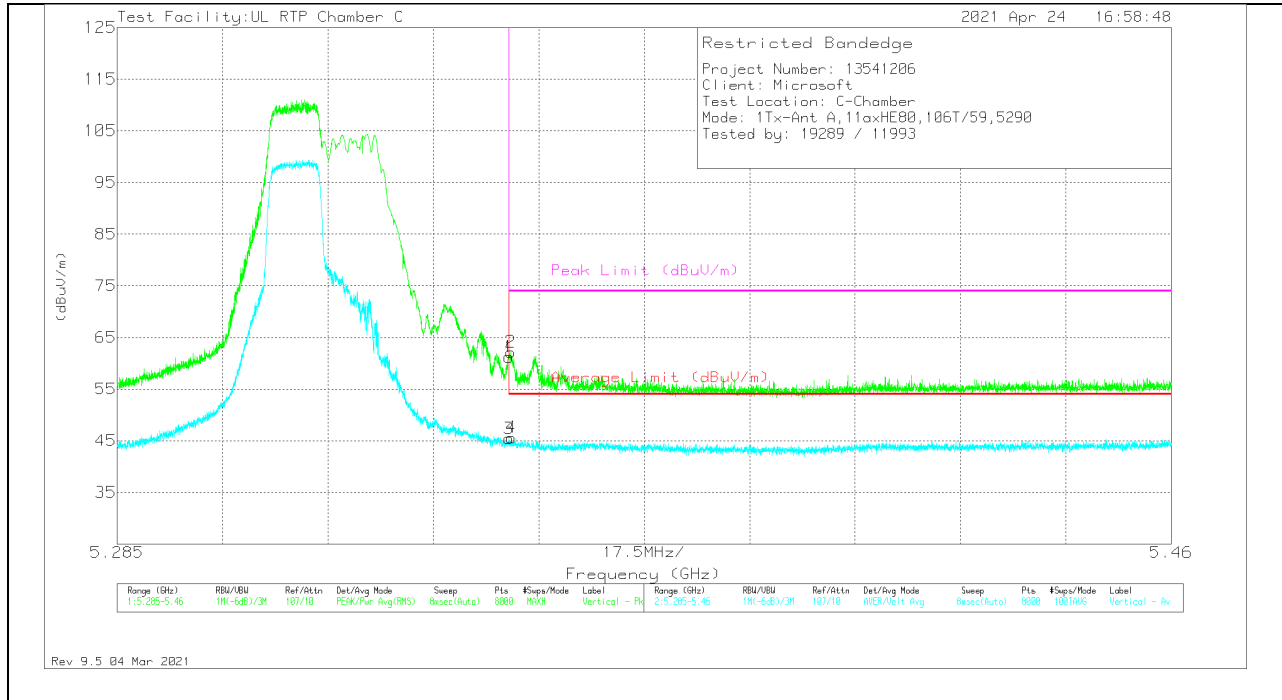

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	39.74	Pk	34.7	-13.2	61.24	-	-	74	-12.76	178	300	V
2	*** 5.35031	40.65	Pk	34.7	-13.2	62.15	-	-	74	-11.85	178	300	V
3	*** 5.35002	23.92	ADV	34.7	-13.2	45.42	54	-8.58	-	-	178	300	V
4	*** 5.35042	24.13	ADV	34.7	-13.2	45.63	54	-8.37	-	-	178	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: 106-Tones, RU Index 60

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

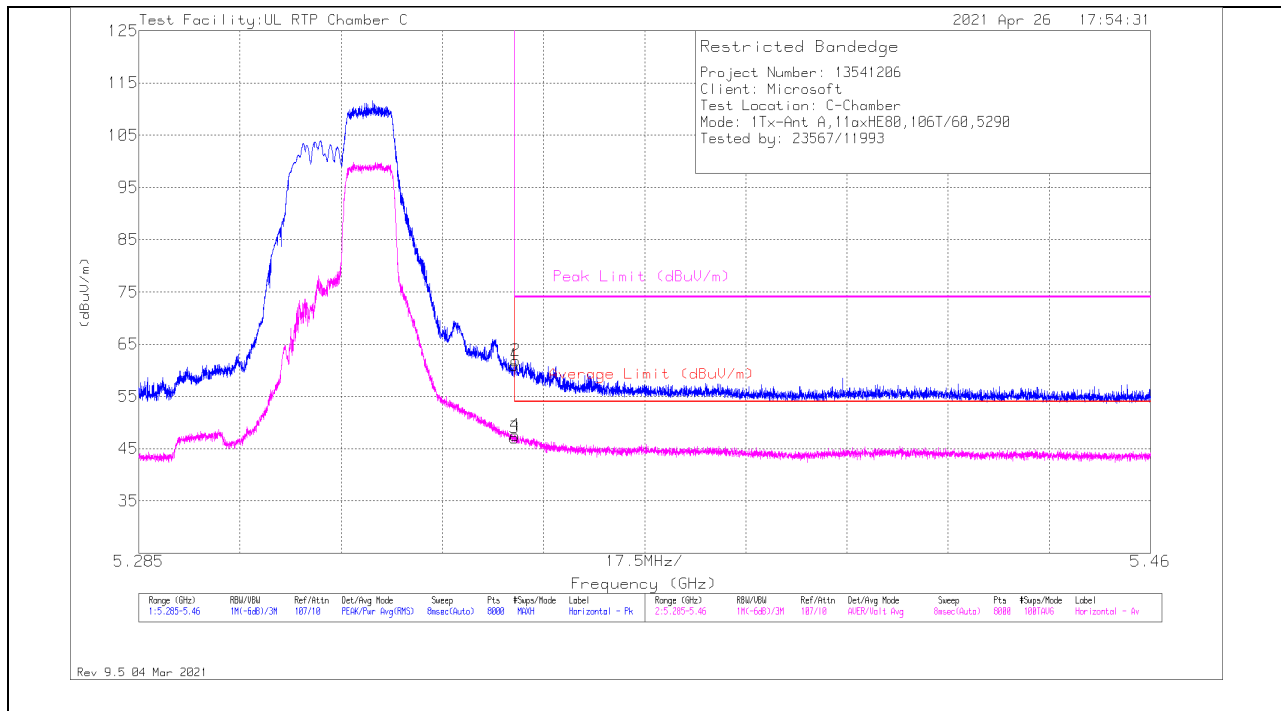

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	39.5	Pk	34.7	-13.2	61	-	-	74	-13	93	214	H
2	* ** 5.35017	40.33	Pk	34.7	-13.2	61.83	-	-	74	-12.17	93	214	H
3	* ** 5.35002	25.6	ADV	34.7	-13.2	47.1	54	-6.9	-	-	93	213	H
4	* ** 5.35004	26.11	ADV	34.7	-13.2	47.61	54	-6.39	-	-	93	213	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

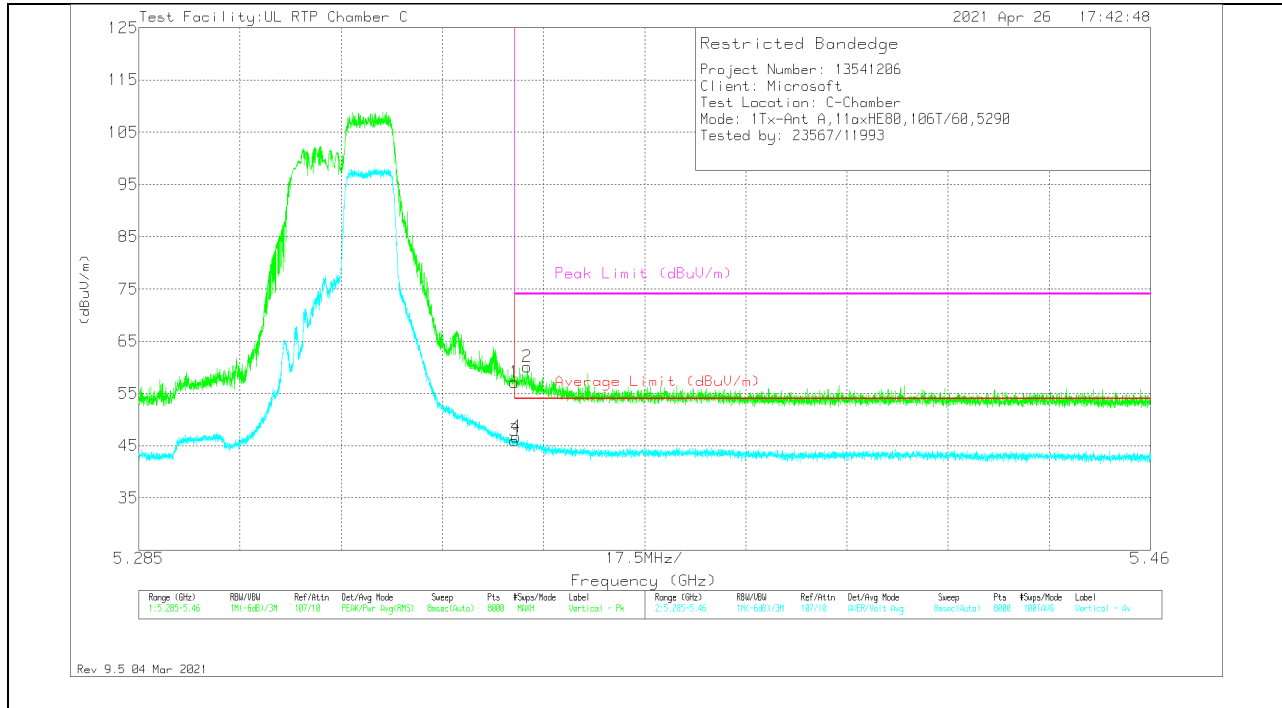


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	35.61	PK	34.7	-13.2	57.11	-	-	74	-16.89	118	256	V
2	*** 5.35221	38.72	PK	34.7	-13.3	60.12	-	-	74	-13.88	118	256	V
3	*** 5.35002	24.4	ADV	34.7	-13.2	45.9	54	-8.1	-	-	118	256	V
4	*** 5.35026	25.2	ADV	34.7	-13.2	46.7	54	-7.3	-	-	118	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: 52-Tones, RU Index 52

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

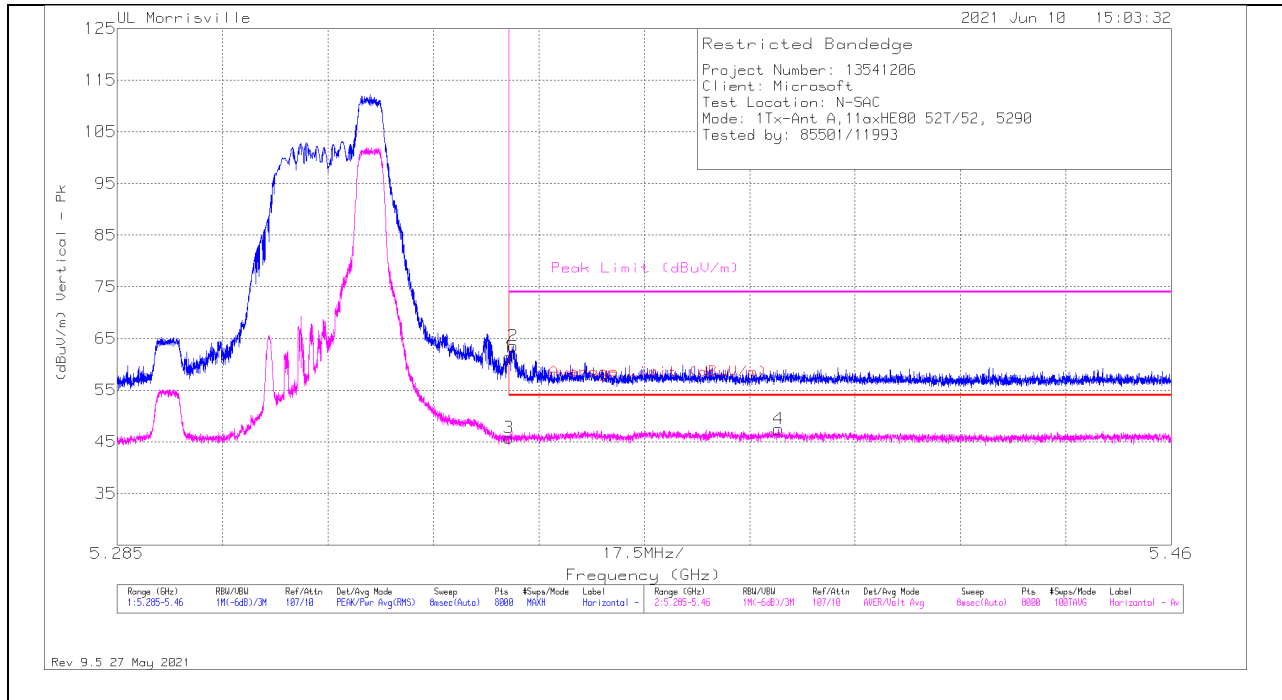

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	36.96	Pk	34.5	-10.1	61.36	-	-	74	-12.64	204	101	H
2	*** 5.35072	39.15	Pk	34.5	-10.1	63.55	-	-	74	-10.45	204	101	H
3	*** 5.35002	21.34	ADV	34.5	-10.1	45.74	54	-8.26	-	-	204	100	H
4	*** 5.39478	22.98	ADV	34.4	-9.9	47.48	54	-6.52	-	-	204	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

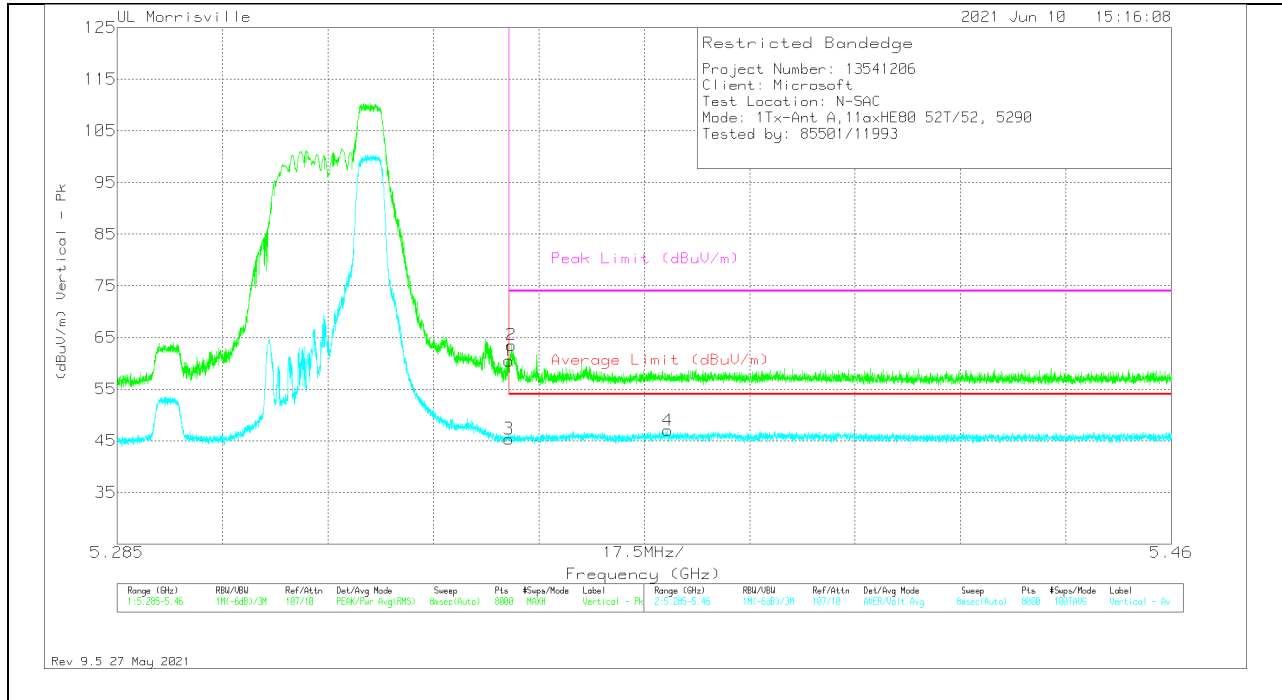

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	36.1	Pk	34.5	-10.1	60.5	-	-	74	-13.5	218	121	V
2	*** 5.35042	39.13	Pk	34.5	-10.1	63.53	-	-	74	-10.47	218	121	V
3	*** 5.35002	20.95	ADV	34.5	-10.1	45.35	54	-8.65	-	-	218	121	V
4	*** 5.37638	22.62	ADV	34.5	-10.1	47.02	54	-6.98	-	-	218	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

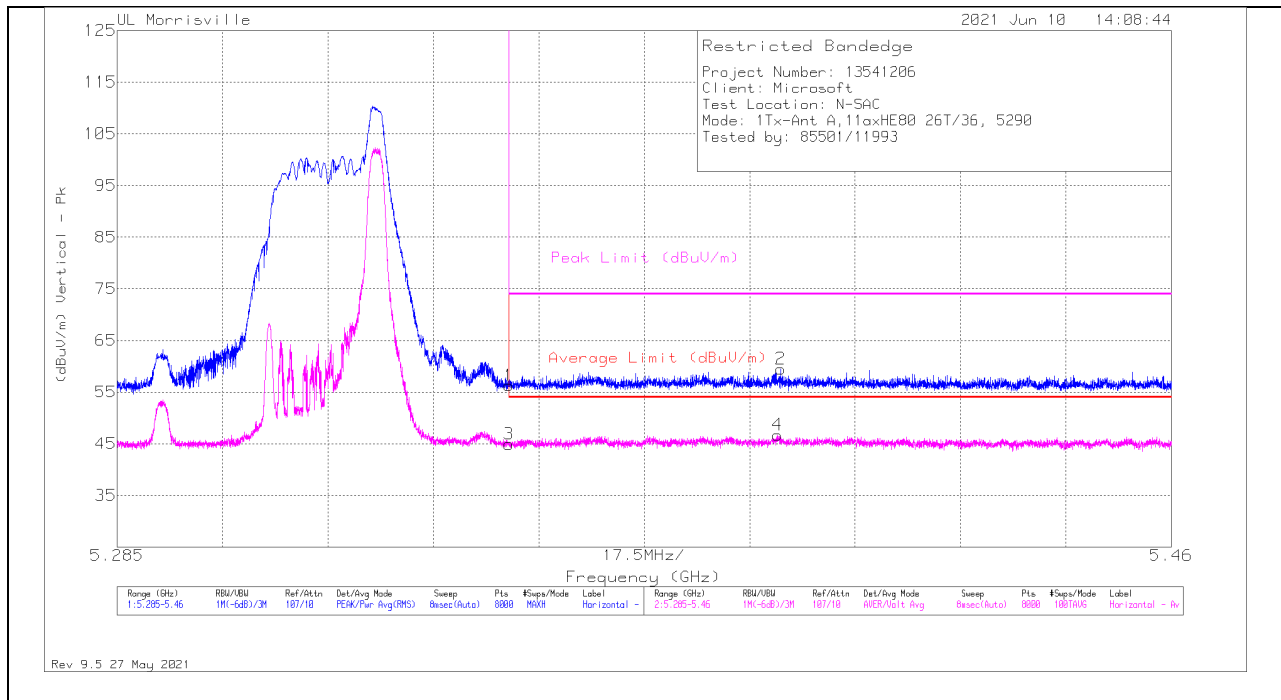

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	31.86	Pk	34.5	-10.1	56.26	-	-	74	-17.74	206	100	H
2	*** 5.39513	34.99	Pk	34.4	-9.9	59.49	-	-	74	-14.51	206	100	H
3	*** 5.35002	20.51	ADV	34.5	-10.1	44.91	54	-9.09	-	-	206	100	H
4	*** 5.39467	22.21	ADV	34.4	-9.9	46.71	54	-7.29	-	-	206	100	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

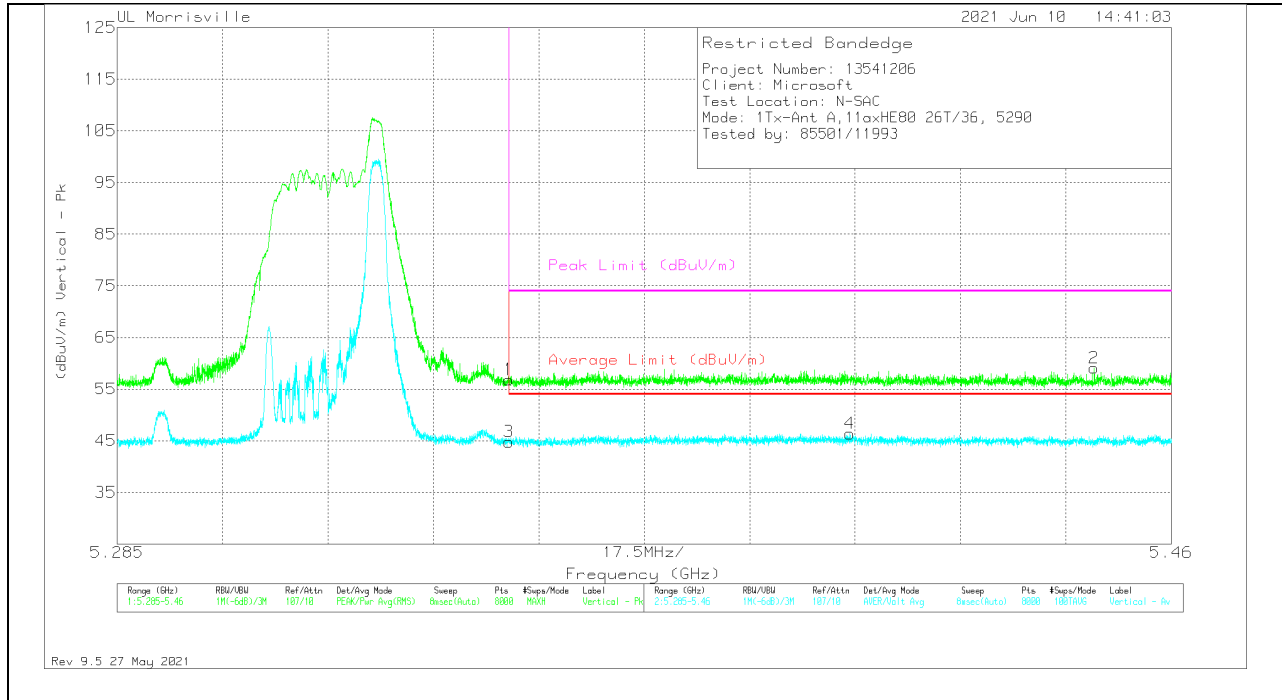

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.42	Pk	34.5	-10.1	56.82	-	-	74	-17.18	225	151	V
2	*** 5.44718	34.49	Pk	34.4	-9.8	59.09	-	-	74	-14.91	225	151	V
3	*** 5.35002	20.39	ADV	34.5	-10.1	44.79	54	-9.21	-	-	225	151	V
4	*** 5.40664	21.77	ADV	34.4	-9.8	46.37	54	-7.63	-	-	225	151	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

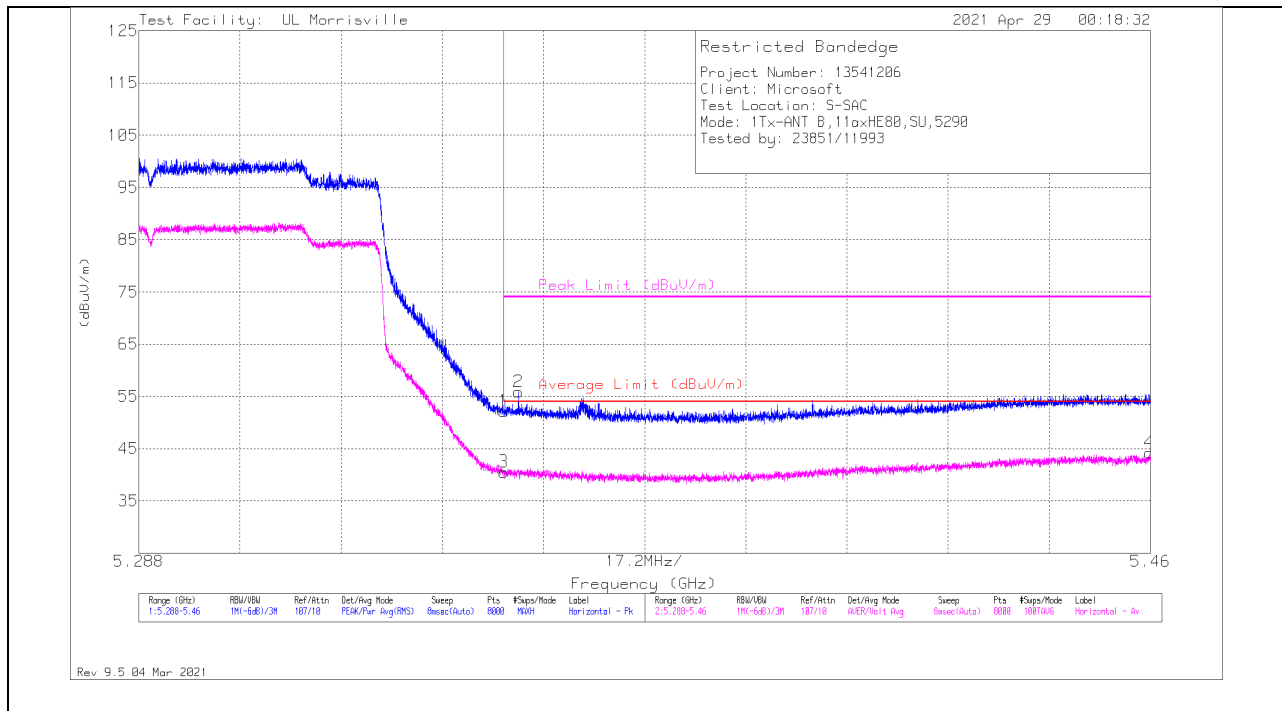

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.81	Pk	34.5	-23.2	0	52.11	-	-	74	-21.89	73	209	H
2	* ** 5.35253	44.56	Pk	34.5	-23.2	0	55.86	-	-	74	-18.14	73	209	H
3	* ** 5.35001	29	ADV	34.5	-23.2	.24	40.54	54	-13.46	-	-	73	209	H
4	* ** 5.45981	32.82	ADV	34.6	-23.5	.24	44.16	54	-9.84	-	-	73	209	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

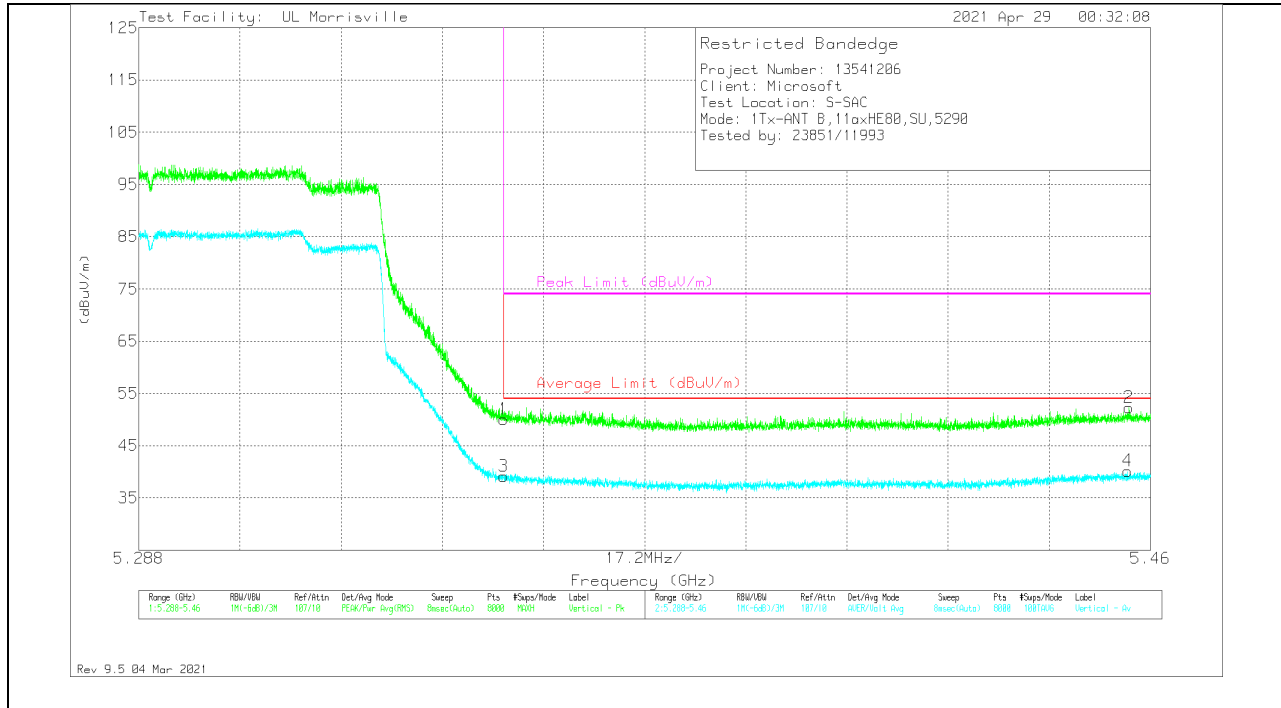


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	38.8	Pk	34.5	-23.2	0	50.1	-	-	74	-23.9	25	375	V
2	* ** 5.45635	41.21	Pk	34.6	-23.5	0	52.31	-	-	74	-21.69	25	375	V
3	* ** 5.35001	27.6	ADV	34.5	-23.2	.24	39.14	54	-14.86	-	-	25	375	V
4	* ** 5.45609	28.83	ADV	34.6	-23.5	.24	40.17	54	-13.83	-	-	25	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

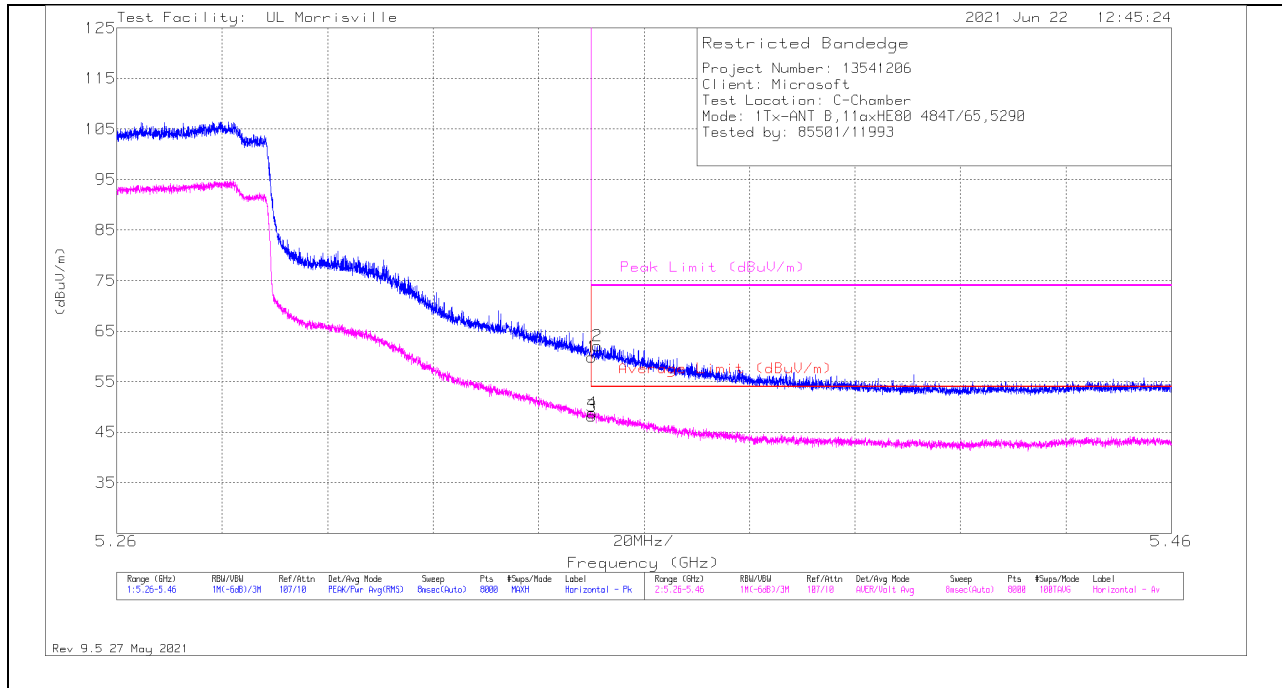

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	48.37	Pk	34.6	-23.1	59.87	-	-	74	-14.13	148	200	H
2	*** 5.35111	50.72	Pk	34.6	-23.2	62.12	-	-	74	-11.88	148	200	H
3	*** 5.35001	36.67	ADV	34.6	-23.1	48.17	54	-5.83	-	-	148	200	H
4	*** 5.35021	37.39	ADV	34.6	-23.2	48.79	54	-5.21	-	-	148	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

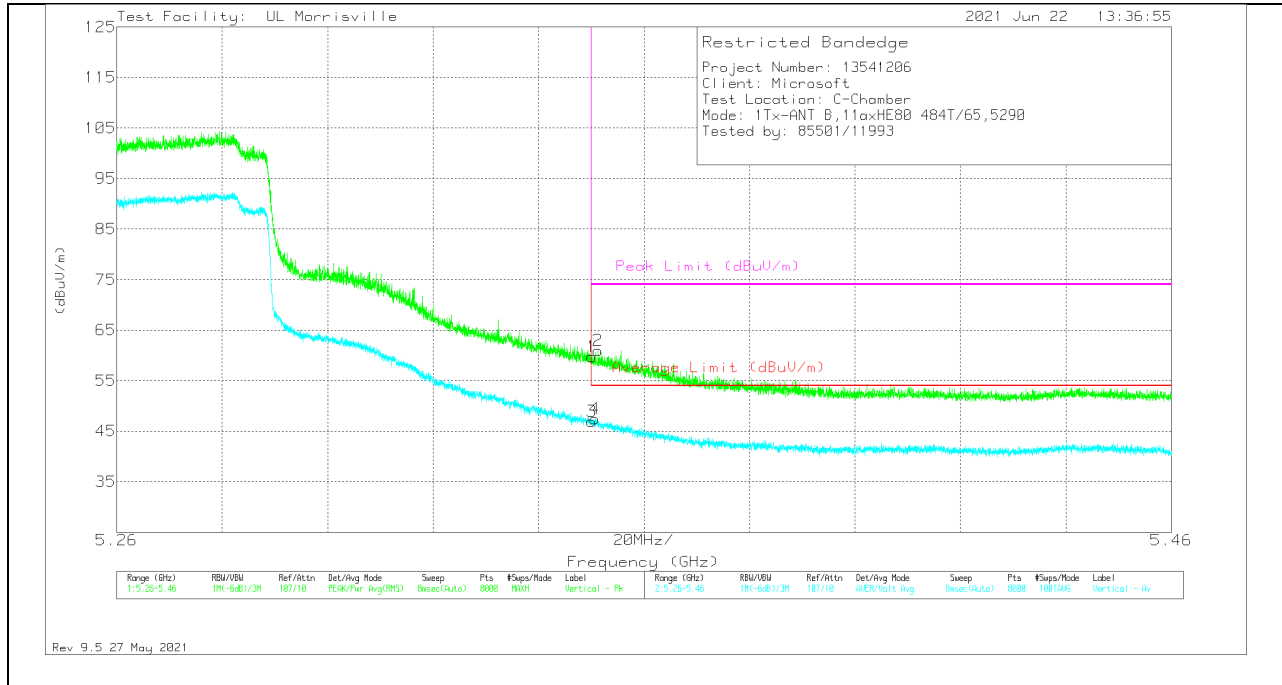

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0087 (db/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	48.27	Pk	34.6	-23.1	59.77	-	-	74	-14.23	147	182	V
2	*** 5.35131	49.61	Pk	34.6	-23.2	61.01	-	-	74	-12.99	147	182	V
3	*** 5.35001	35.45	ADV	34.6	-23.1	46.95	54	-7.05	-	-	147	182	V
4	*** 5.35066	36.03	ADV	34.6	-23.2	47.43	54	-6.57	-	-	147	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 484-Tones, RU Index 66

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

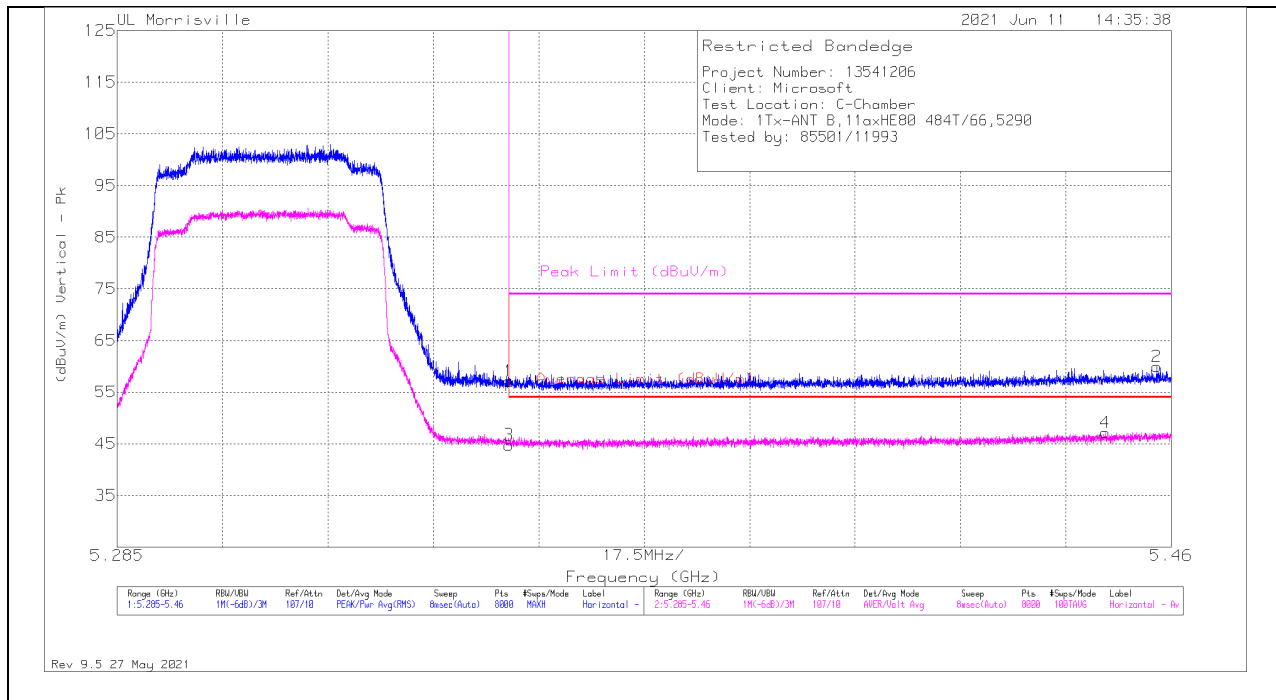

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.69	Pk	34.5	-10.1	57.09	-	-	74	-16.91	230	282	H
2	*** 5.4576	35.31	Pk	34.4	-9.8	59.91	-	-	74	-14.09	230	282	H
3	*** 5.35002	20.33	ADV	34.5	-10.1	44.73	54	-9.27	-	-	230	282	H
4	*** 5.44904	22.55	ADV	34.4	-9.8	47.15	54	-6.85	-	-	230	282	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

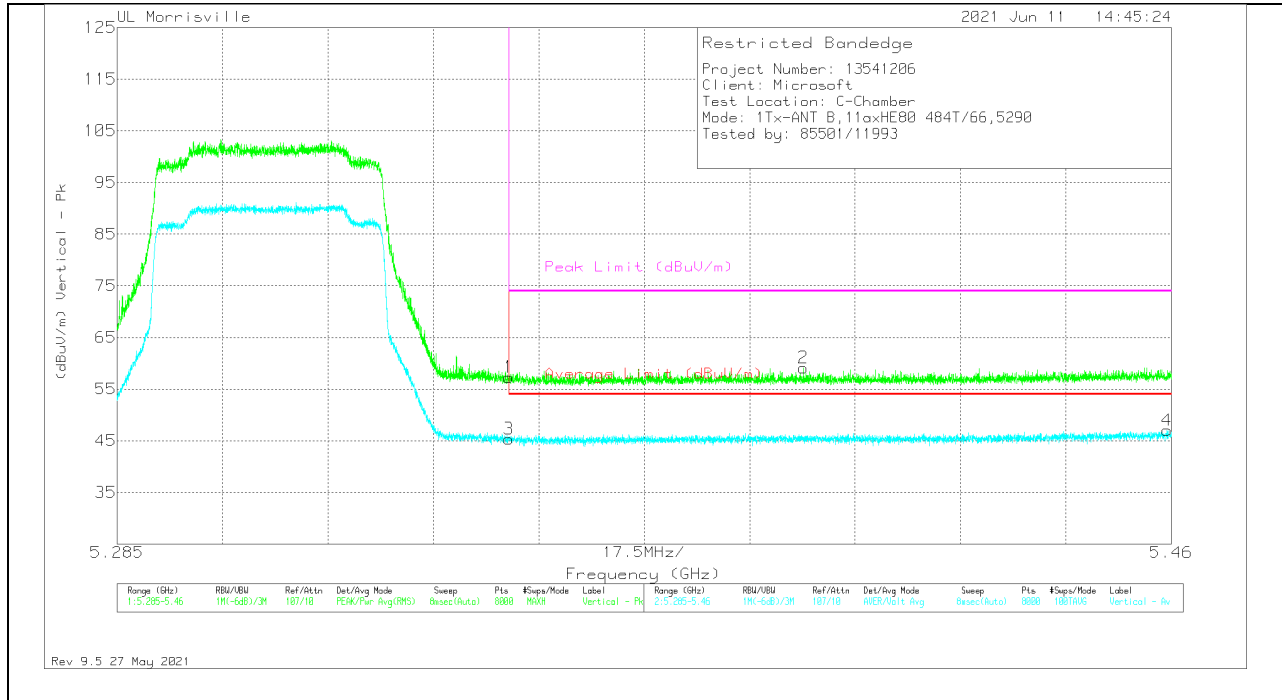

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.9	Pk	34.5	-10.1	57.3	-	-	74	-16.7	193	142	V
2	*** 5.39892	34.52	Pk	34.4	-9.8	59.12	-	-	74	-14.88	193	142	V
3	*** 5.35002	20.93	ADV	34.5	-10.1	45.33	54	-8.67	-	-	193	142	V
4	*** 5.4593	22.32	ADV	34.4	-9.7	47.02	54	-6.98	-	-	193	142	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 63

BANDEGE (MID CHANNEL)


HORIZONTAL RESULT

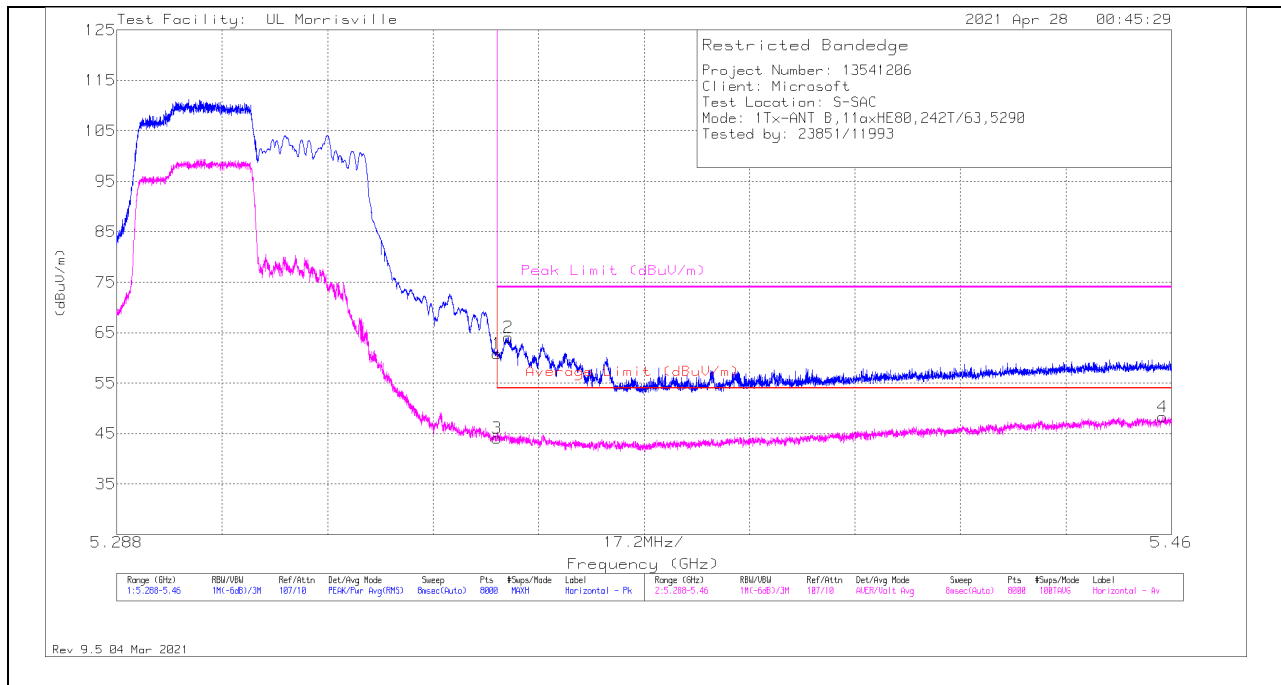

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	49.5	Pk	34.5	-23.2	60.8	-	-	74	-13.2	77	201	H
2	* ** 5.35182	52.72	Pk	34.5	-23.2	64.02	-	-	74	-9.98	77	201	H
3	* ** 5.35001	32.81	ADV	34.5	-23.2	44.11	54	-9.89	-	-	77	200	H
4	* ** 5.45858	37.21	ADV	34.6	-23.5	48.31	54	-5.69	-	-	77	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

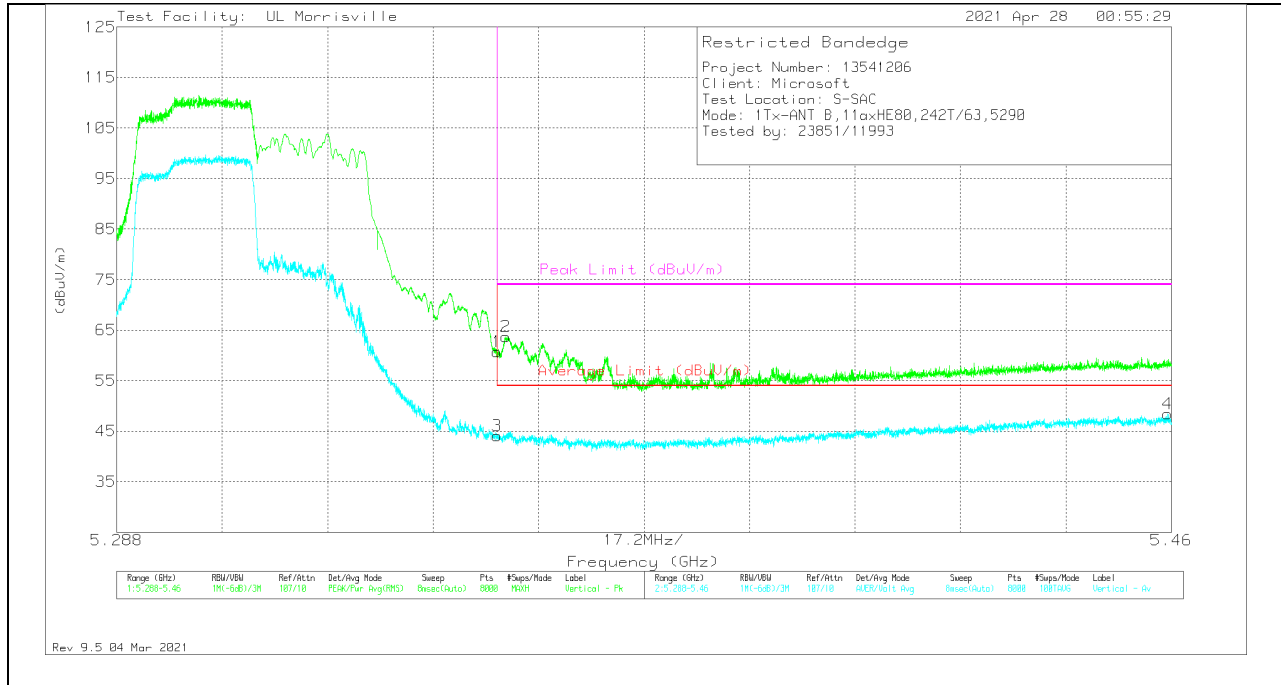


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	49.47	Pk	34.5	-23.2	60.77	-	-	74	-13.23	73	211	V
2	* ** 5.35146	52.42	Pk	34.5	-23.2	63.72	-	-	74	-10.28	73	211	V
3	* ** 5.35001	32.82	ADV	34.5	-23.2	44.12	54	-9.88	-	-	73	210	V
4	* ** 5.45938	37.29	ADV	34.6	-23.5	48.39	54	-5.61	-	-	73	210	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 64

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

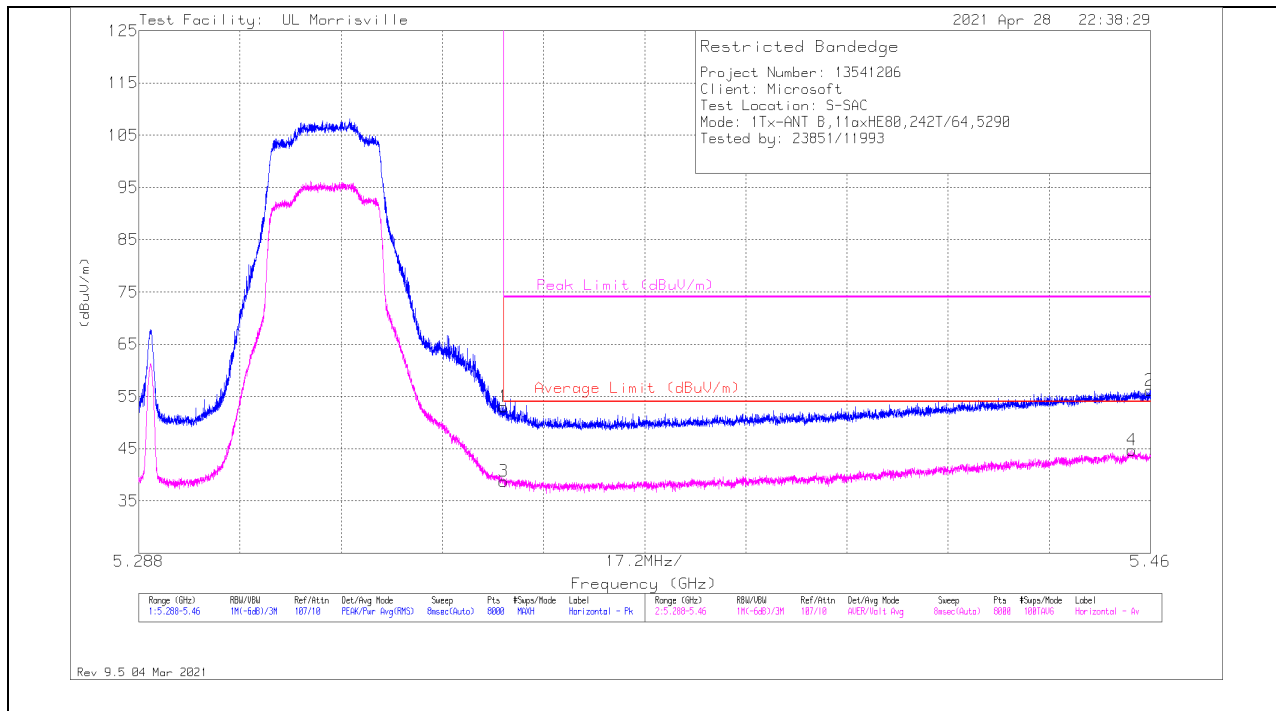

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	41.67	Pk	34.5	-23.2	52.97	-	-	74	-21.03	100	222	H
2	** * 5.45994	45.03	Pk	34.6	-23.5	56.13	-	-	74	-17.87	100	222	H
3	** * 5.35001	27.43	ADV	34.5	-23.2	38.73	54	-15.27	-	-	100	222	H
4	** * 5.4568	33.62	ADV	34.6	-23.5	44.72	54	-9.28	-	-	100	222	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

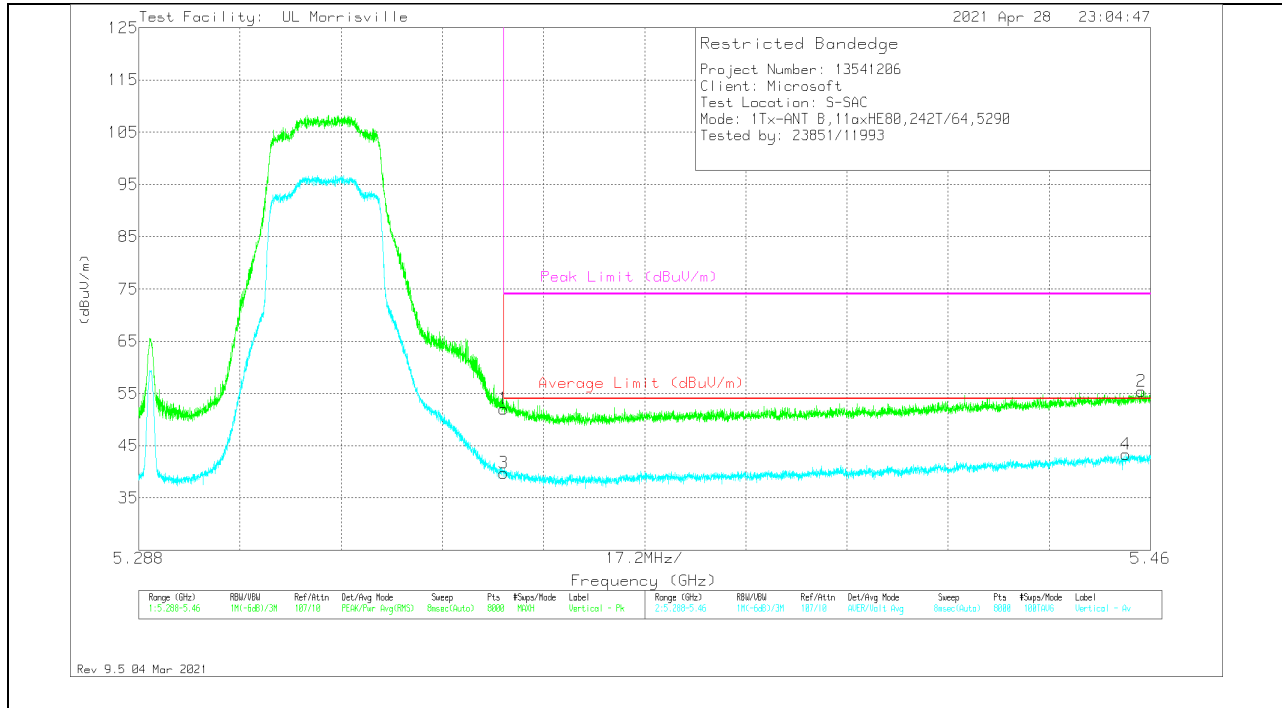


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	40.74	PK	34.5	-23.2	52.04	-	-	74	-21.96	21	211	V
2	*** 5.4585	44.33	PK	34.6	-23.5	55.43	-	-	74	-18.57	21	211	V
3	*** 5.35001	28.49	ADV	34.5	-23.2	39.79	54	-14.21	-	-	21	211	V
4	*** 5.45583	32.19	ADV	34.6	-23.5	43.29	54	-10.71	-	-	21	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 59

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

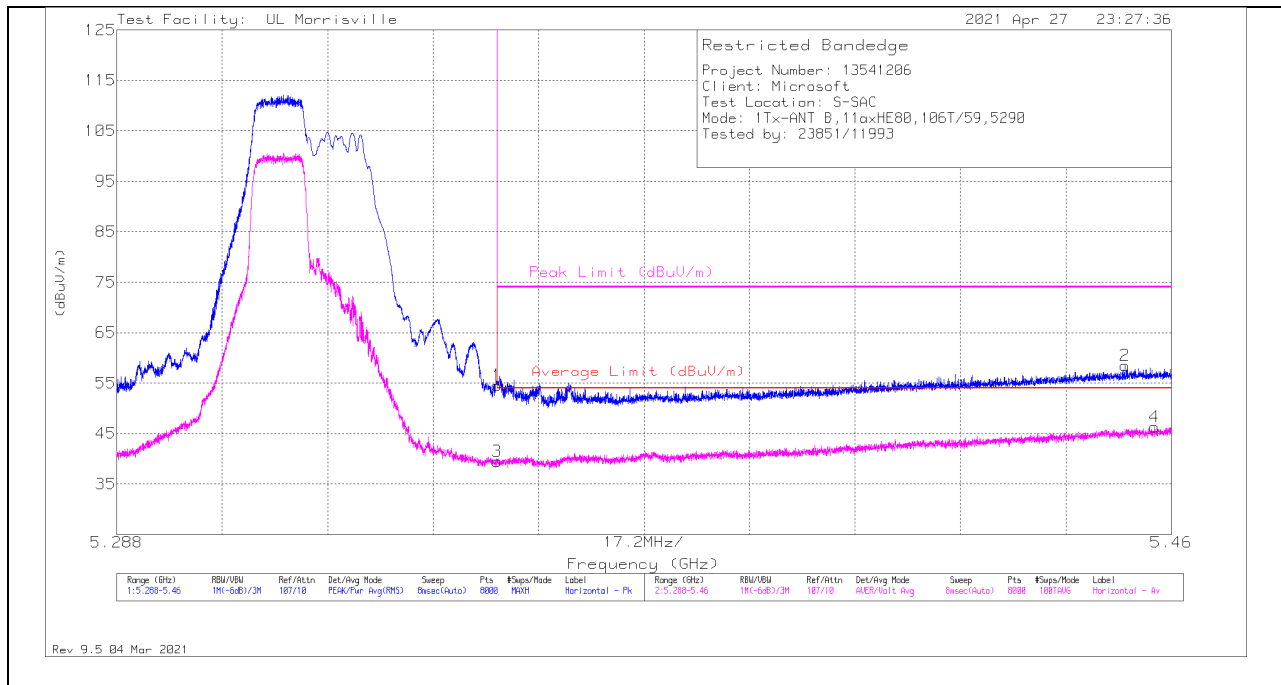

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.27	Pk	34.5	-23.2	54.57	-	-	74	-19.43	102	204	H
2	* ** 5.45243	47.28	Pk	34.6	-23.4	58.48	-	-	74	-15.52	102	204	H
3	* ** 5.35001	28.24	ADV	34.5	-23.2	39.54	54	-14.46	-	-	102	203	H
4	* ** 5.45725	35.19	ADV	34.6	-23.5	46.29	54	-7.71	-	-	102	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

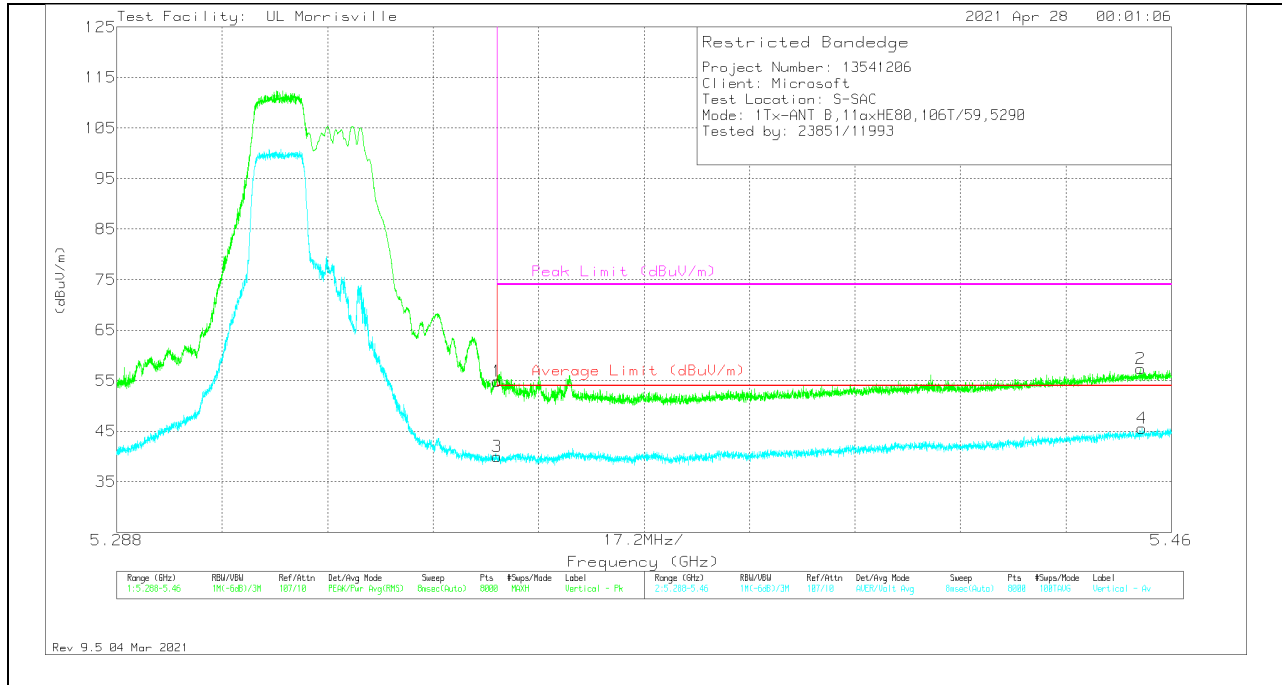


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	43.64	Pk	34.5	-23.2	54.94	-	-	74	-19.06	32	267	V
2	* ** 5.45499	46.3	Pk	34.6	-23.5	57.4	-	-	74	-16.6	32	267	V
3	* ** 5.35001	28.65	ADV	34.5	-23.2	39.95	54	-14.05	-	-	32	267	V
4	* ** 5.45519	34.5	ADV	34.6	-23.5	45.6	54	-8.4	-	-	32	267	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 106-Tones, RU Index 60

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

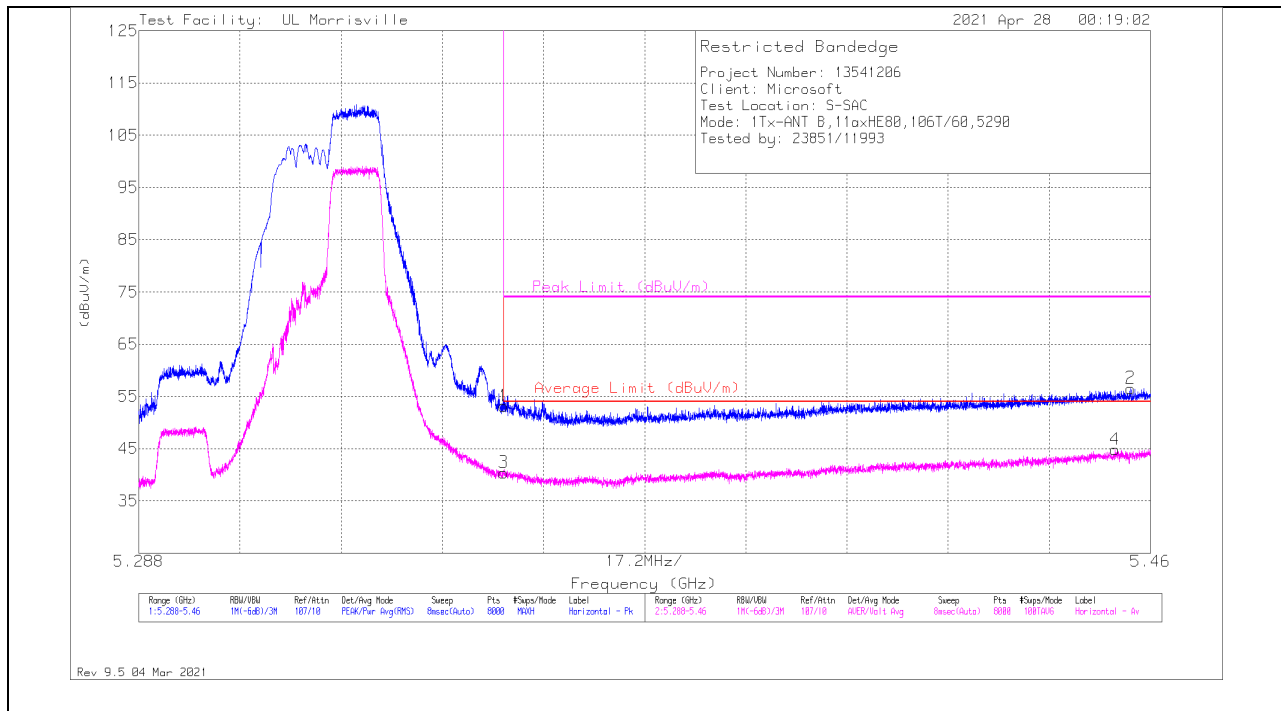

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.35001	41.9	Pk	34.5	-23.2	53.2	-	-	74	-20.8	95	194	H
2	** * 5.45667	45.46	Pk	34.6	-23.5	56.56	-	-	74	-17.44	95	194	H
3	** * 5.35001	29.12	ADV	34.5	-23.2	40.42	54	-13.58	-	-	95	194	H
4	** * 5.45394	33.67	ADV	34.6	-23.4	44.87	54	-9.13	-	-	95	194	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

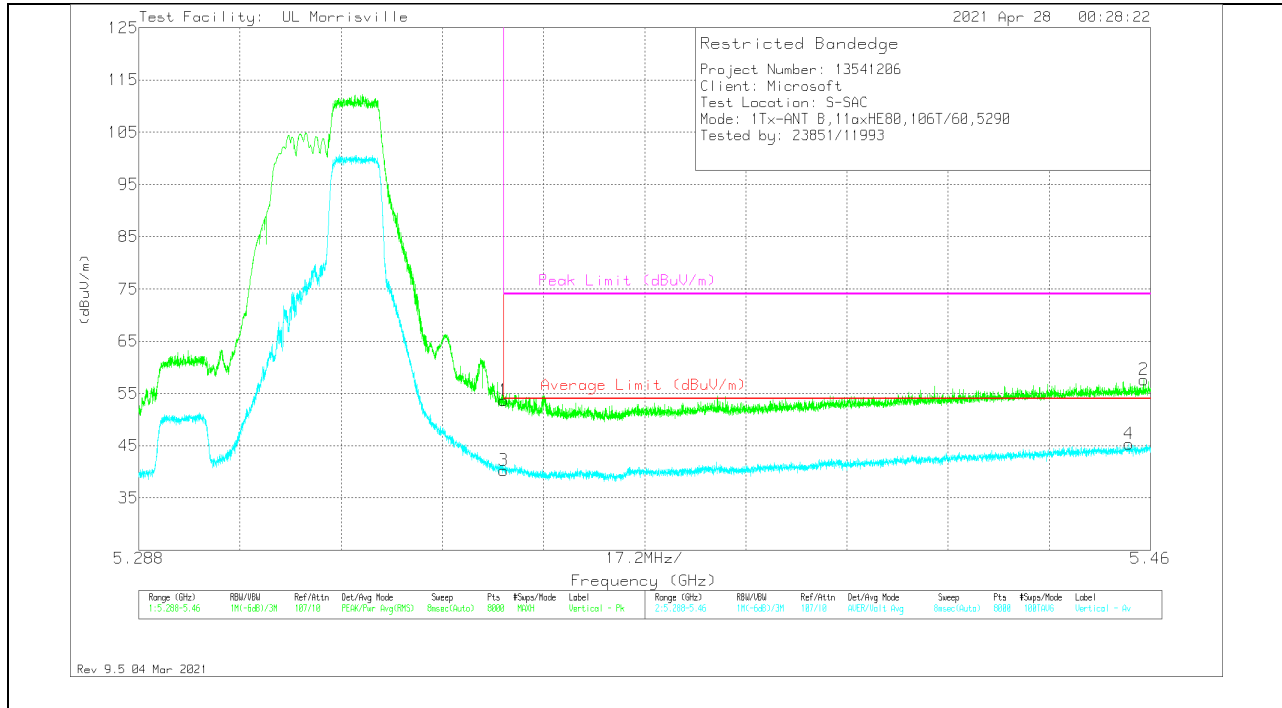


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35001	42.4	PK	34.5	-23.2	53.7	-	-	74	-20.3	54	248	V
2	*** 5.45884	46.47	PK	34.6	-23.5	57.57	-	-	74	-16.43	54	248	V
3	*** 5.35001	28.88	ADV	34.5	-23.2	40.18	54	-13.82	-	-	54	248	V
4	*** 5.4563	34.19	ADV	34.6	-23.5	45.29	54	-8.71	-	-	54	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 52-Tones, RU Index 52

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

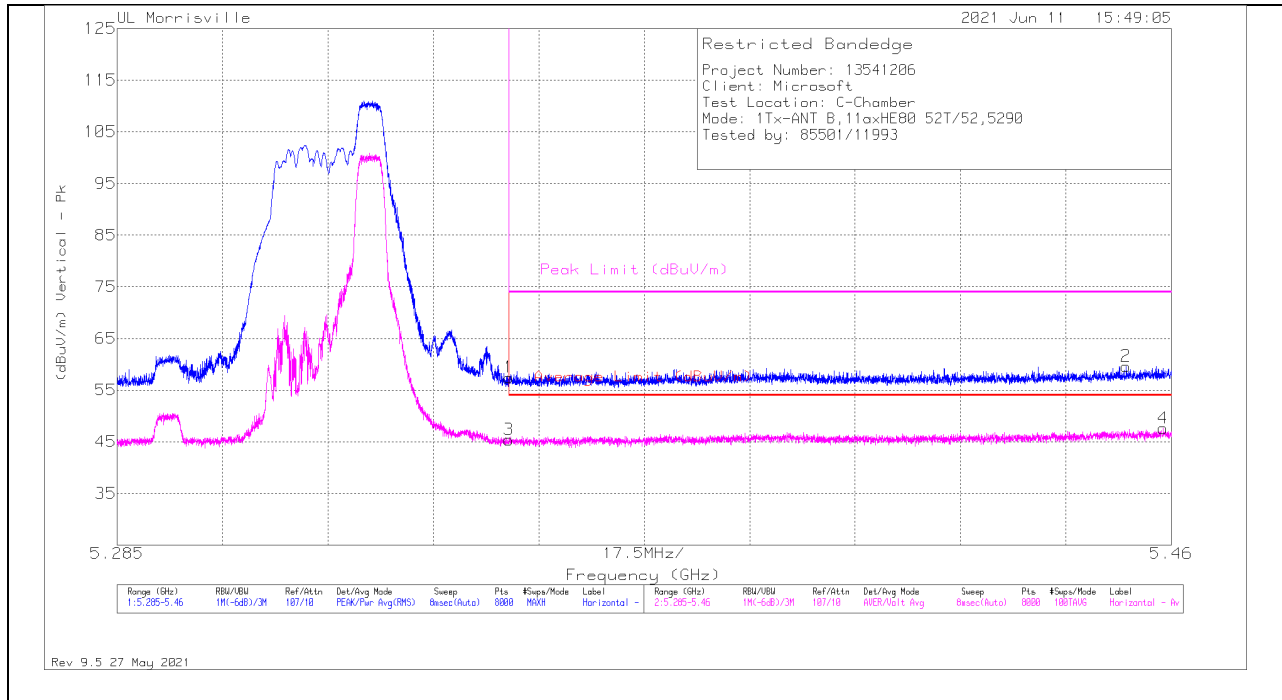

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	33.04	Pk	34.5	-10.1	57.44	-	-	74	-16.56	230	228	H
2	*** 5.45252	35.02	Pk	34.4	-9.8	59.62	-	-	74	-14.38	230	228	H
3	*** 5.35002	20.99	ADV	34.5	-10.1	45.39	54	-8.61	-	-	230	228	H
4	*** 5.45862	22.89	ADV	34.4	-9.7	47.59	54	-6.41	-	-	230	228	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

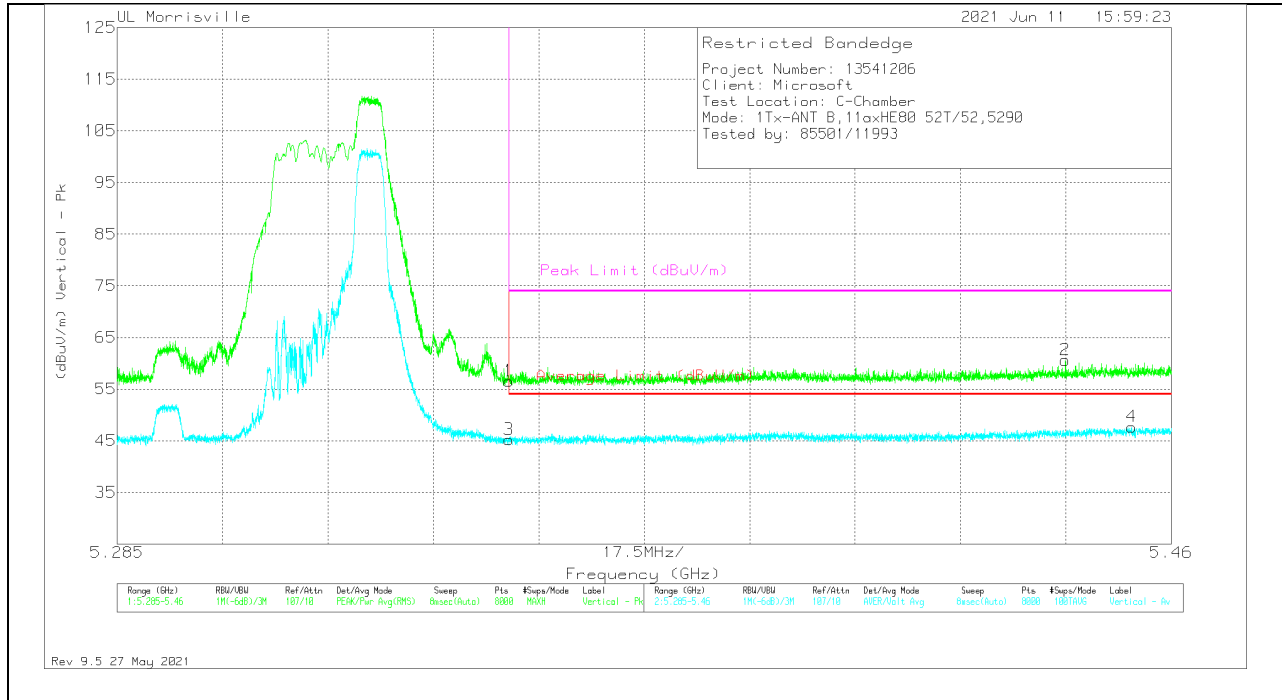

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.16	Pk	34.5	-10.1	56.56	-	-	74	-17.44	246	157	V
2	*** 5.44241	36.12	Pk	34.4	-9.9	60.62	-	-	74	-13.38	246	157	V
3	*** 5.35002	20.82	ADV	34.5	-10.1	45.22	54	-8.78	-	-	246	157	V
4	*** 5.45342	23.09	ADV	34.4	-9.8	47.69	54	-6.31	-	-	246	157	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 36

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

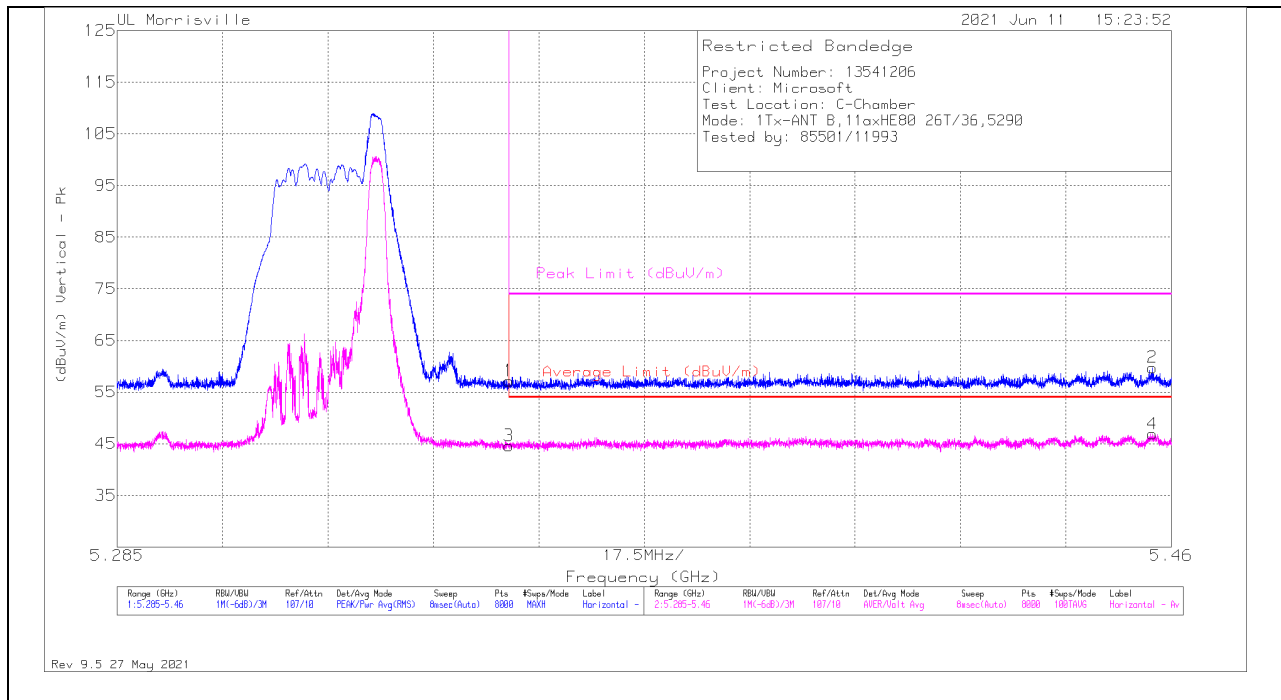

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.76	Pk	34.5	-10.1	57.16	-	-	74	-16.84	246	134	H
2	*** 5.45687	35.15	Pk	34.4	-9.8	59.75	-	-	74	-14.25	246	134	H
3	*** 5.35002	20.2	ADV	34.5	-10.1	44.6	54	-9.4	-	-	246	134	H
4	*** 5.45685	22.29	ADV	34.4	-9.8	46.89	54	-7.11	-	-	246	134	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

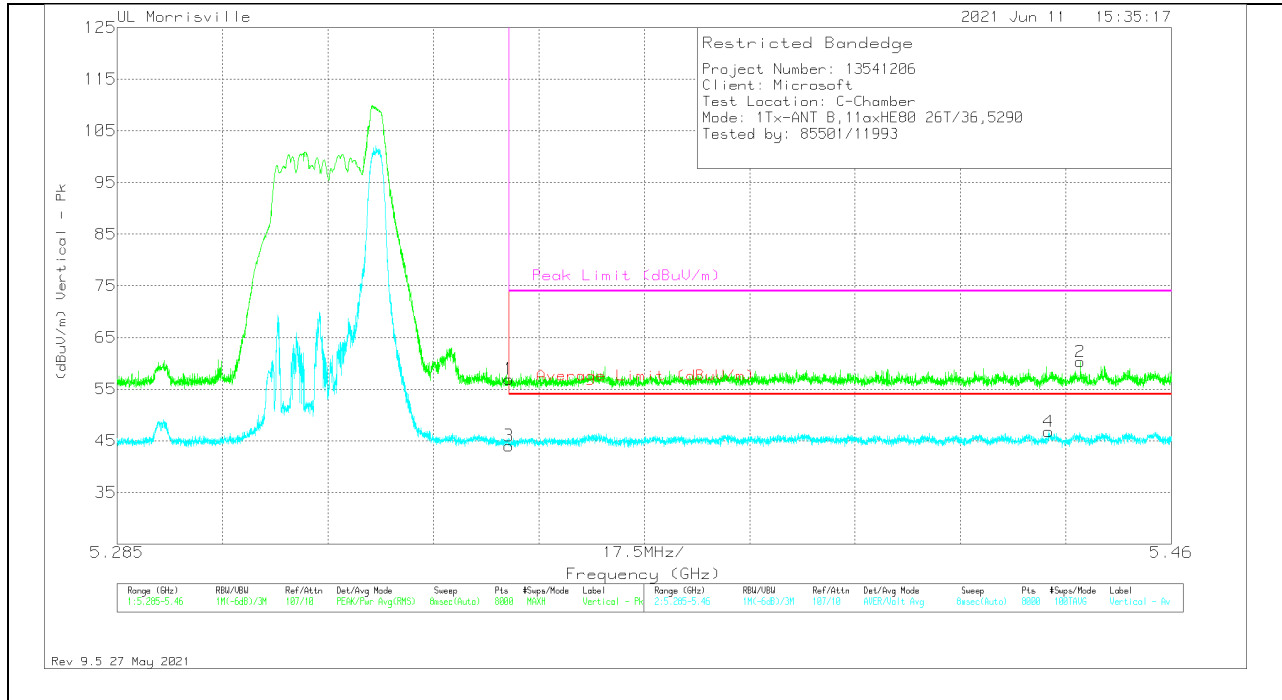

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.35002	32.52	Pk	34.5	-10.1	56.92	-	-	74	-17.08	218	268	V
2	*** 5.44488	35.7	Pk	34.4	-9.8	60.3	-	-	74	-13.7	218	268	V
3	*** 5.35002	19.59	ADV	34.5	-10.1	43.99	54	-10.01	-	-	218	268	V
4	*** 5.43961	22.28	ADV	34.4	-9.9	46.78	54	-7.22	-	-	218	268	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

10.1.3. TX ABOVE 1 GHz 802.11ax HE160 MODE IN THE 5.2GHz & 5.3GHz BAND

2TX Antenna A + Antenna B OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

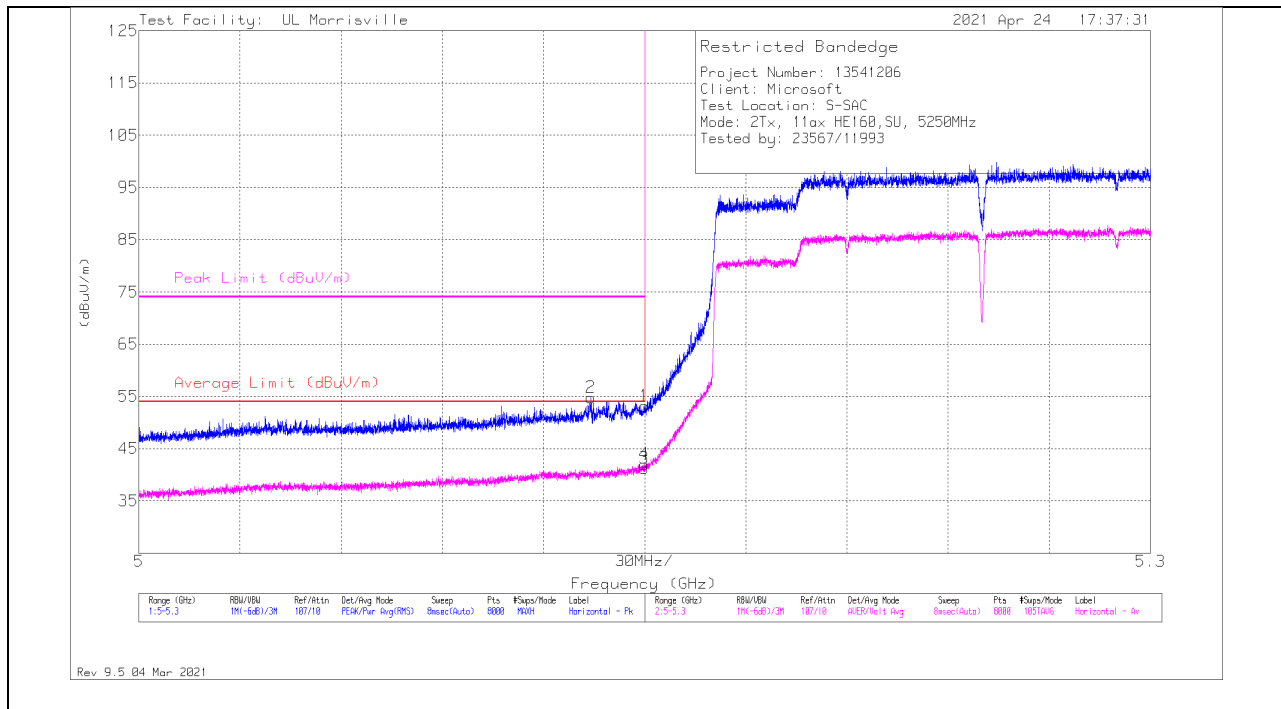

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	41.4	Pk	34.2	-22.4	0	53.2	-	-	74	-20.8	3	242	H
2	* ** 5.13404	43.11	Pk	34.1	-22.5	0	54.71	-	-	74	-19.29	3	242	H
3	* ** 5.14998	28.96	ADV	34.2	-22.4	.46	41.22	54	-12.78	-	-	3	242	H
4	* ** 5.14983	29.68	ADV	34.2	-22.4	.46	41.94	54	-12.06	-	-	3	242	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

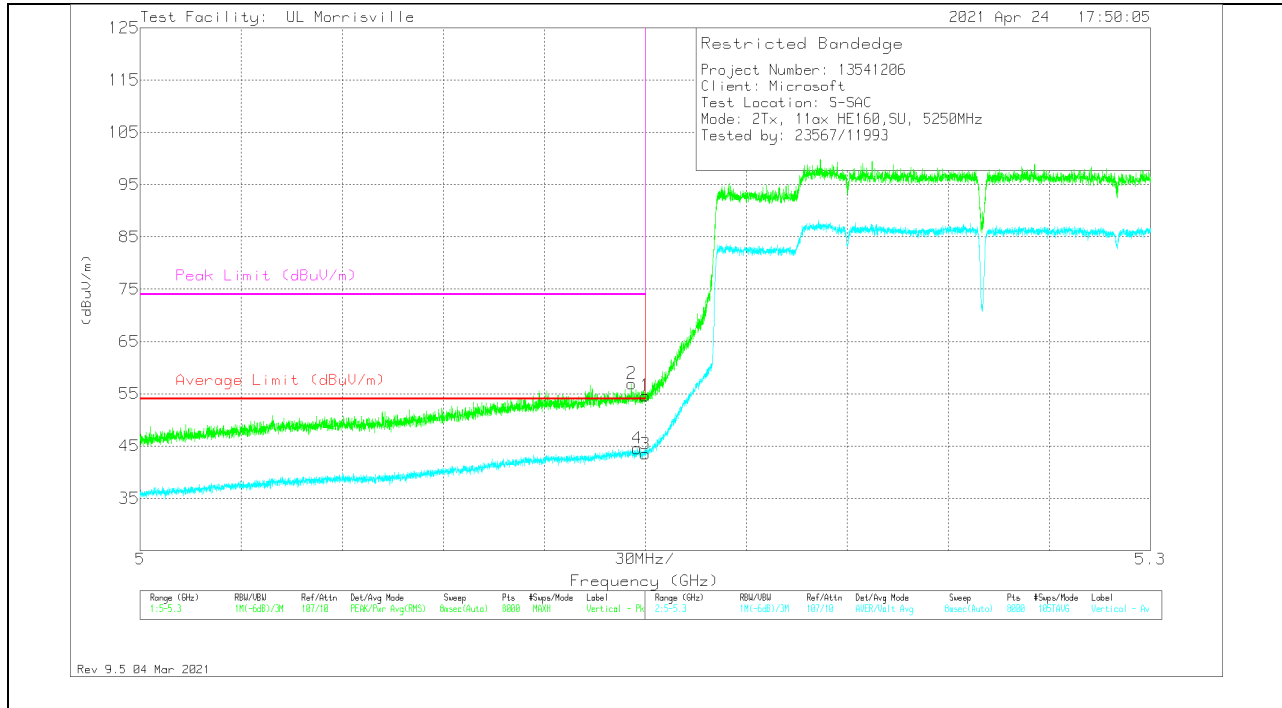


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14998	42.82	Pk	34.2	-22.4	0	54.62	-	-	74	-19.38	37	214	V
2	* ** 5.14589	45.22	Pk	34.1	-22.4	0	56.92	-	-	74	-17.08	37	214	V
3	* ** 5.14998	31.21	ADV	34.2	-22.4	.46	43.47	54	-10.53	-	-	37	214	V
4	* ** 5.14762	32.29	ADV	34.2	-22.4	.46	44.55	54	-9.45	-	-	37	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

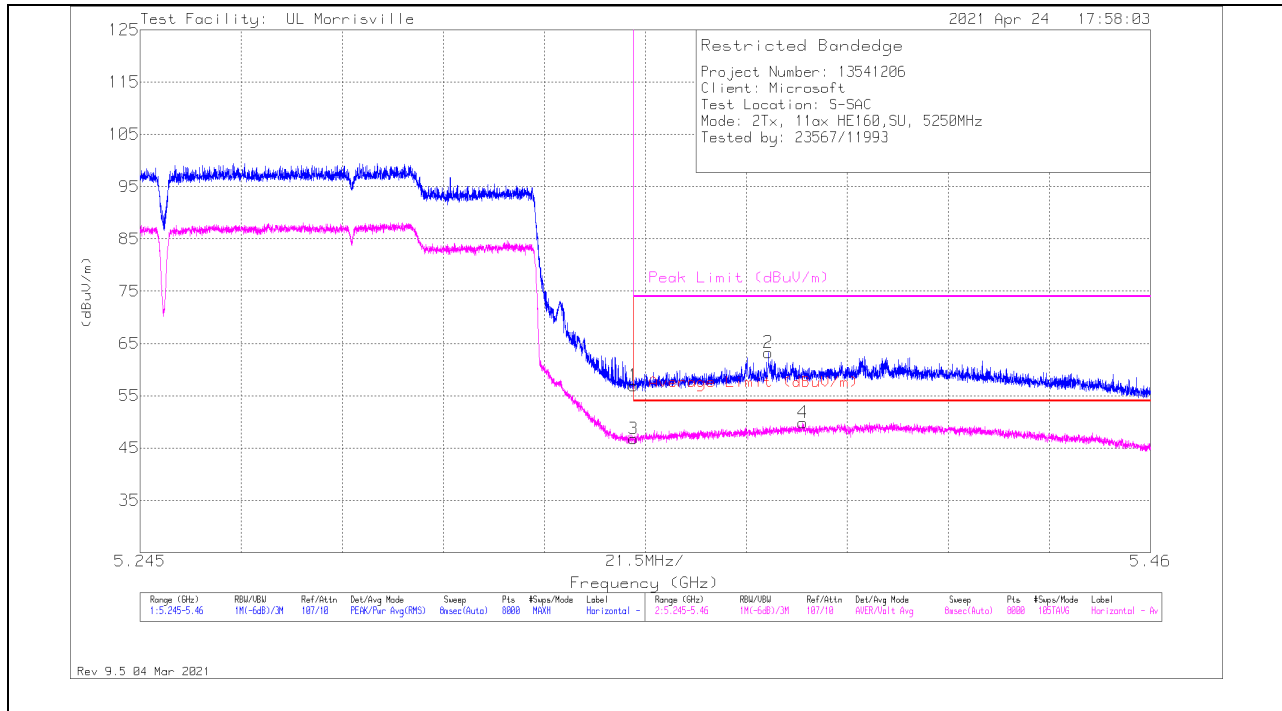

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.63	Pk	34.5	-23.2	0	56.93	-	-	74	-17.07	27	248	H
2	* ** 5.37866	52.04	Pk	34.5	-23.3	0	63.24	-	-	74	-10.76	27	248	H
3	* ** 5.35001	35.02	ADV	34.5	-23.2	.46	46.78	54	-7.22	-	-	27	248	H
4	* ** 5.38603	38.18	ADV	34.5	-23.3	.46	49.84	54	-4.16	-	-	27	248	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

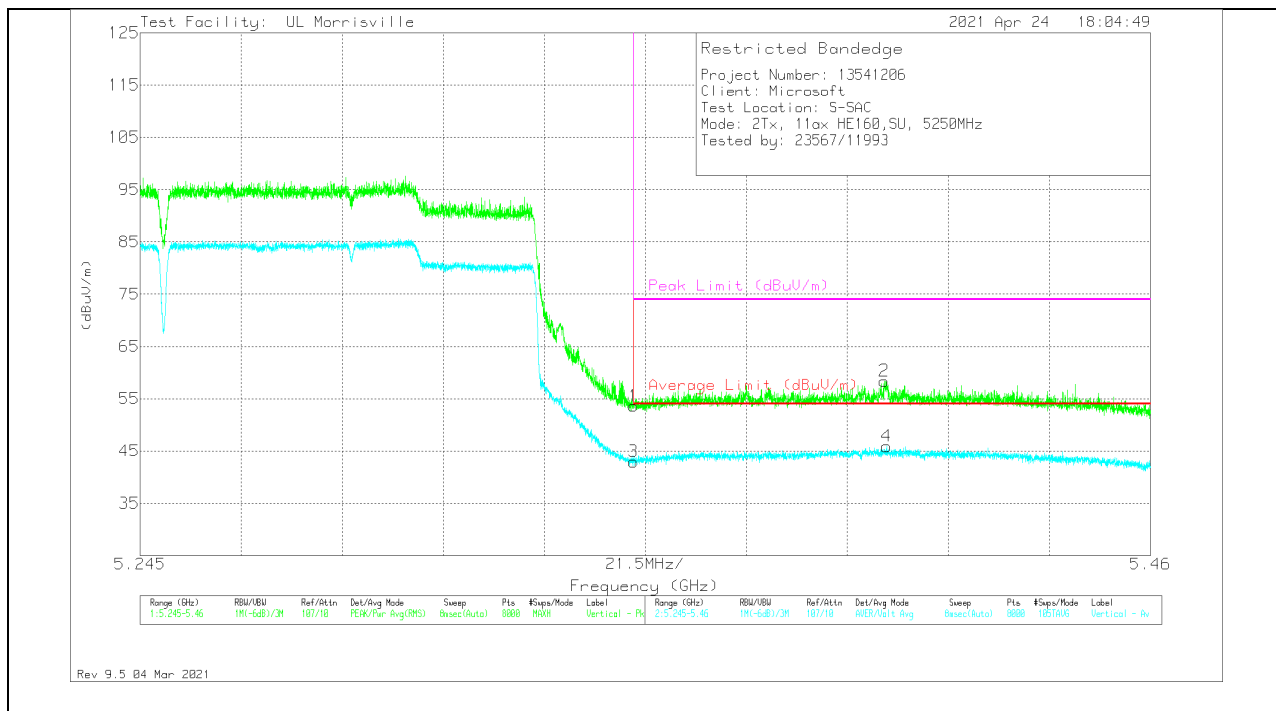


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	42.29	Pk	34.5	-23.2	0	53.59	-	-	74	-20.41	291	245	V
2	* ** 5.40334	47.17	Pk	34.5	-23.3	0	58.37	-	-	74	-15.63	291	245	V
3	* ** 5.35001	31.21	ADV	34.5	-23.2	.46	42.97	54	-11.03	-	-	291	245	V
4	* ** 5.40385	34.23	ADV	34.5	-23.3	.46	45.89	54	-8.11	-	-	291	245	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna A OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

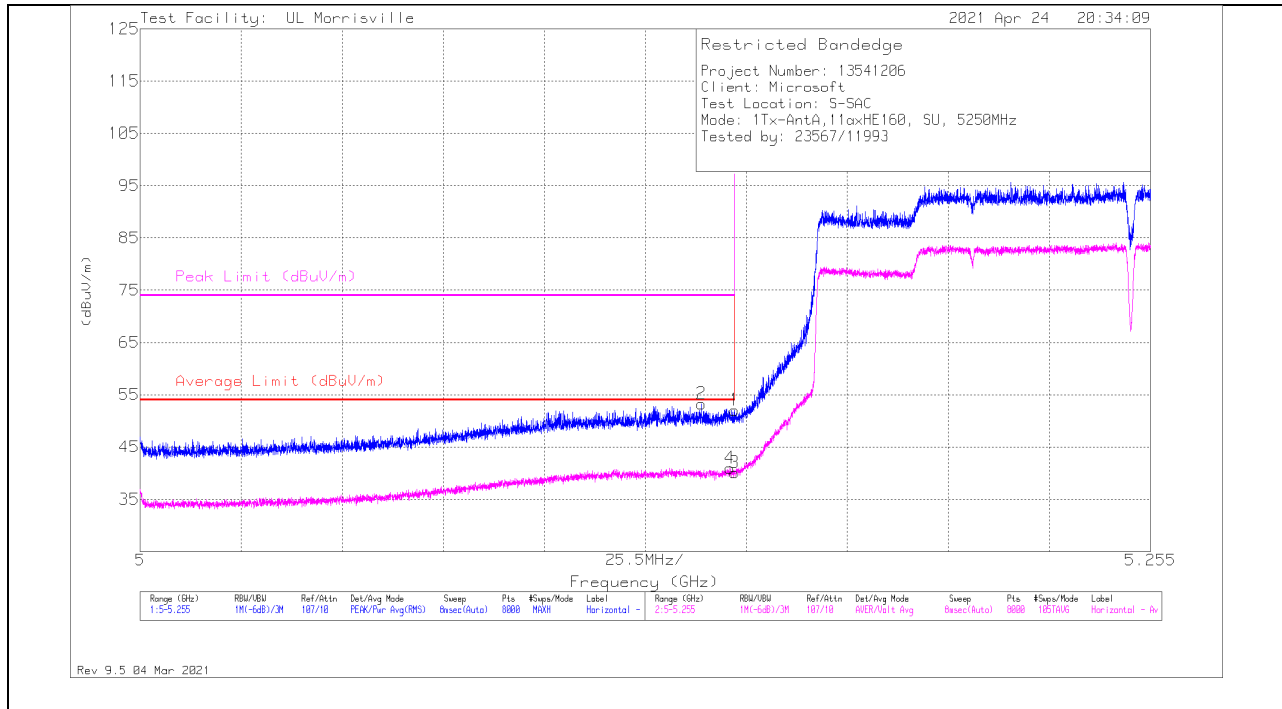

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	40.27	Pk	34.2	-22.4	0	52.07	-	-	74	-21.93	219	236	H
2	* ** 5.14164	41.69	Pk	34.1	-22.5	0	53.29	-	-	74	-20.71	219	236	H
3	* ** 5.14999	27.84	ADV	34.2	-22.4	.46	40.1	54	-13.9	-	-	219	236	H
4	* ** 5.14887	28.7	ADV	34.2	-22.4	.46	40.96	54	-13.04	-	-	219	236	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

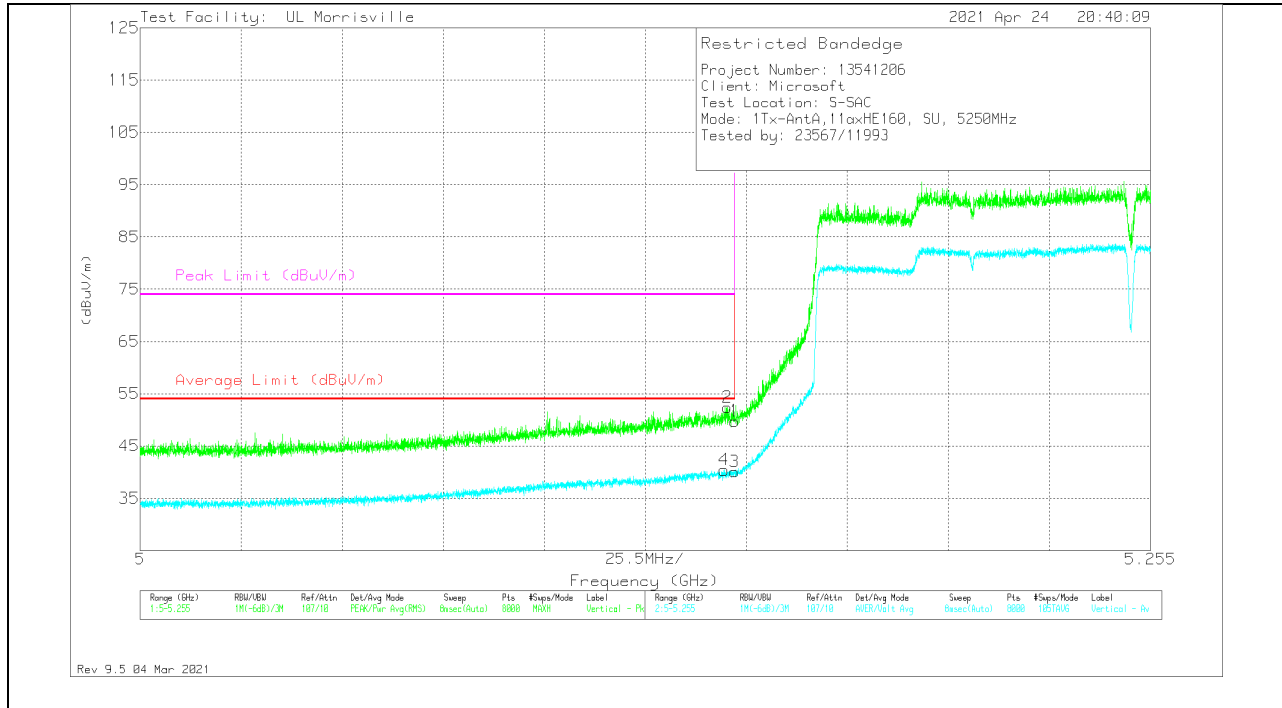


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	37.95	Pk	34.2	-22.4	0	49.75	-	-	74	-24.25	3	350	V
2	* ** 5.14824	40.56	Pk	34.2	-22.4	0	52.36	-	-	74	-21.64	3	350	V
3	* ** 5.14999	27.82	ADV	34.2	-22.4	.46	40.08	54	-13.92	-	-	3	350	V
4	* ** 5.14738	28.16	ADV	34.2	-22.4	.46	40.42	54	-13.58	-	-	3	350	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

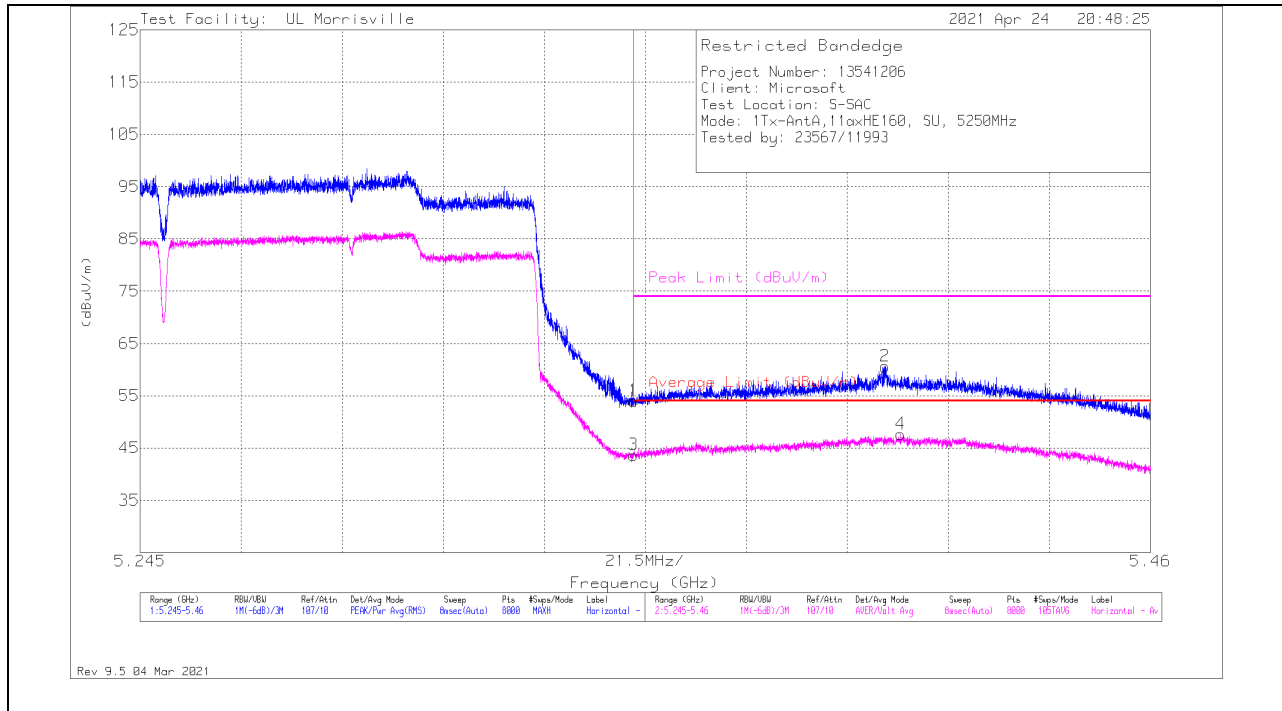

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	42.73	Pk	34.5	-23.2	0	54.03	-	-	74	-19.97	254	304	H
2	* ** 5.4035	49.42	Pk	34.5	-23.3	0	60.62	-	-	74	-13.38	254	304	H
3	* ** 5.35001	31.91	ADV	34.5	-23.2	.46	43.67	54	-10.33	-	-	254	303	H
4	* ** 5.40686	36	ADV	34.5	-23.3	.46	47.66	54	-6.34	-	-	254	303	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

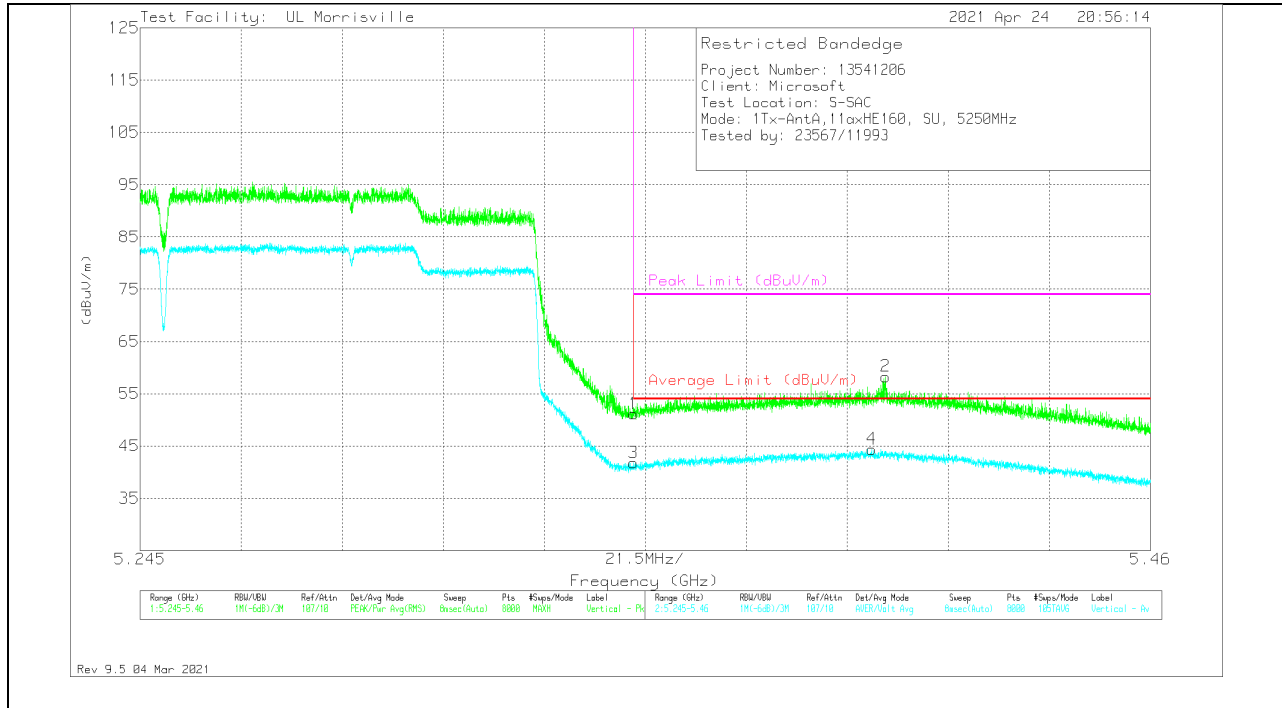


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	39.85	Pk	34.5	-23.2	0	51.15	-	-	74	-22.85	312	286	V
2	* ** 5.40361	47.1	Pk	34.5	-23.3	0	58.3	-	-	74	-15.7	312	286	V
3	* ** 5.35001	30.01	ADV	34.5	-23.2	.46	41.77	54	-12.23	-	-	312	286	V
4	* ** 5.40065	32.73	ADV	34.5	-23.3	.46	44.39	54	-9.61	-	-	312	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna B OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

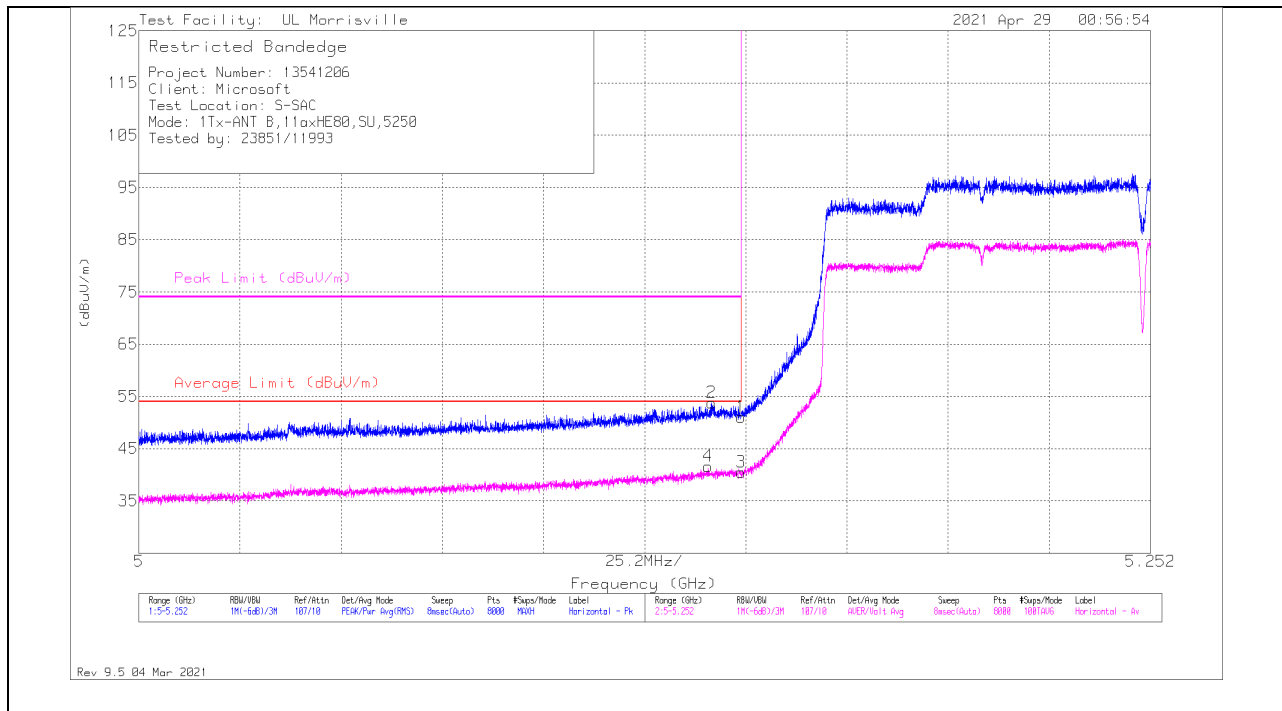

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	39.17	Pk	34.3	-22.4	0	51.07	-	-	74	-22.93	104	201	H
2	* ** 5.14265	42.01	Pk	34.3	-22.5	0	53.81	-	-	74	-20.19	104	201	H
3	* ** 5.14999	28.16	ADV	34.3	-22.4	.46	40.52	54	-13.48	-	-	104	200	H
4	* ** 5.14174	29.38	ADV	34.3	-22.5	.46	41.64	54	-12.36	-	-	104	200	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

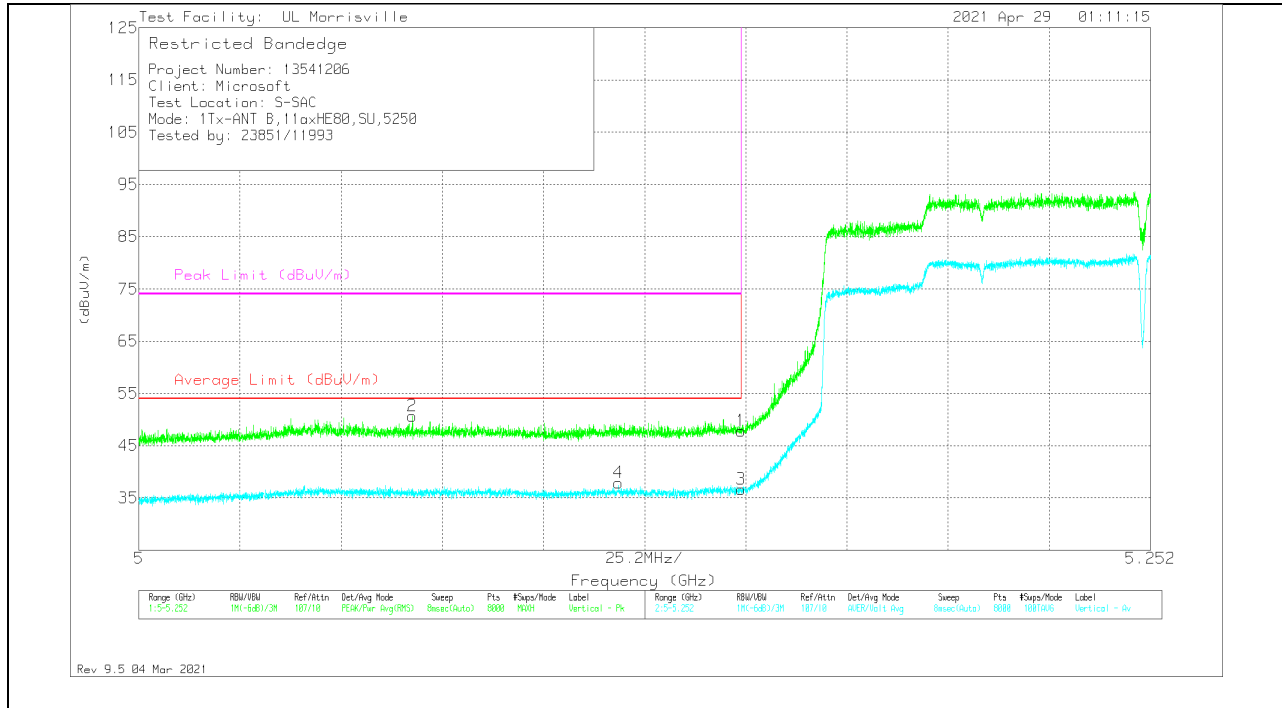


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	35.94	Pk	34.3	-22.4	0	47.84	-	-	74	-26.16	1	150	V
2	* ** 5.06817	39.08	Pk	34.1	-22.5	0	50.68	-	-	74	-23.32	1	150	V
3	* ** 5.14999	24.22	ADV	34.3	-22.4	.46	36.58	54	-17.42	-	-	1	150	V
4	* ** 5.11949	25.71	ADV	34.2	-22.5	.46	37.87	54	-16.13	-	-	1	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

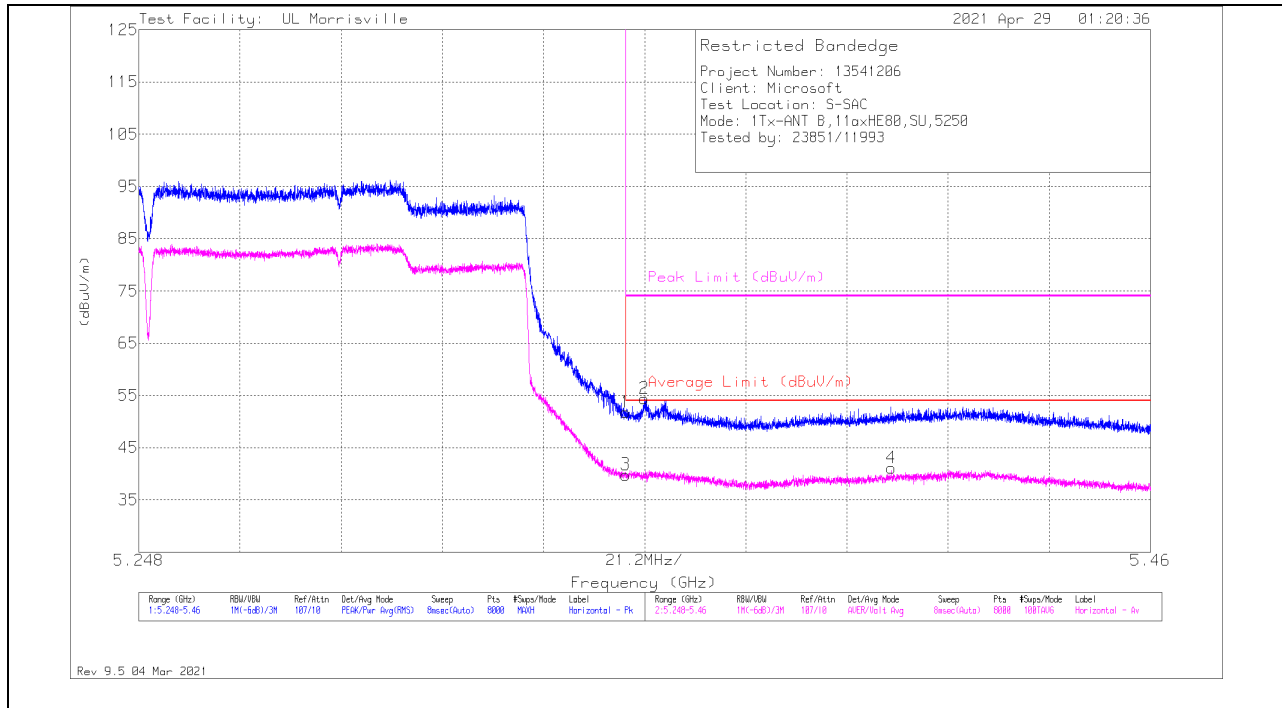

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	40.44	Pk	34.5	-23.2	0	51.74	-	-	74	-22.26	320	380	H
2	* ** 5.35399	43.11	Pk	34.5	-23.2	0	54.41	-	-	74	-19.59	320	380	H
3	* ** 5.35001	28.04	ADV	34.5	-23.2	.46	39.8	54	-14.2	-	-	320	380	H
4	* ** 5.40572	29.45	ADV	34.5	-23.3	.46	41.11	54	-12.89	-	-	320	380	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

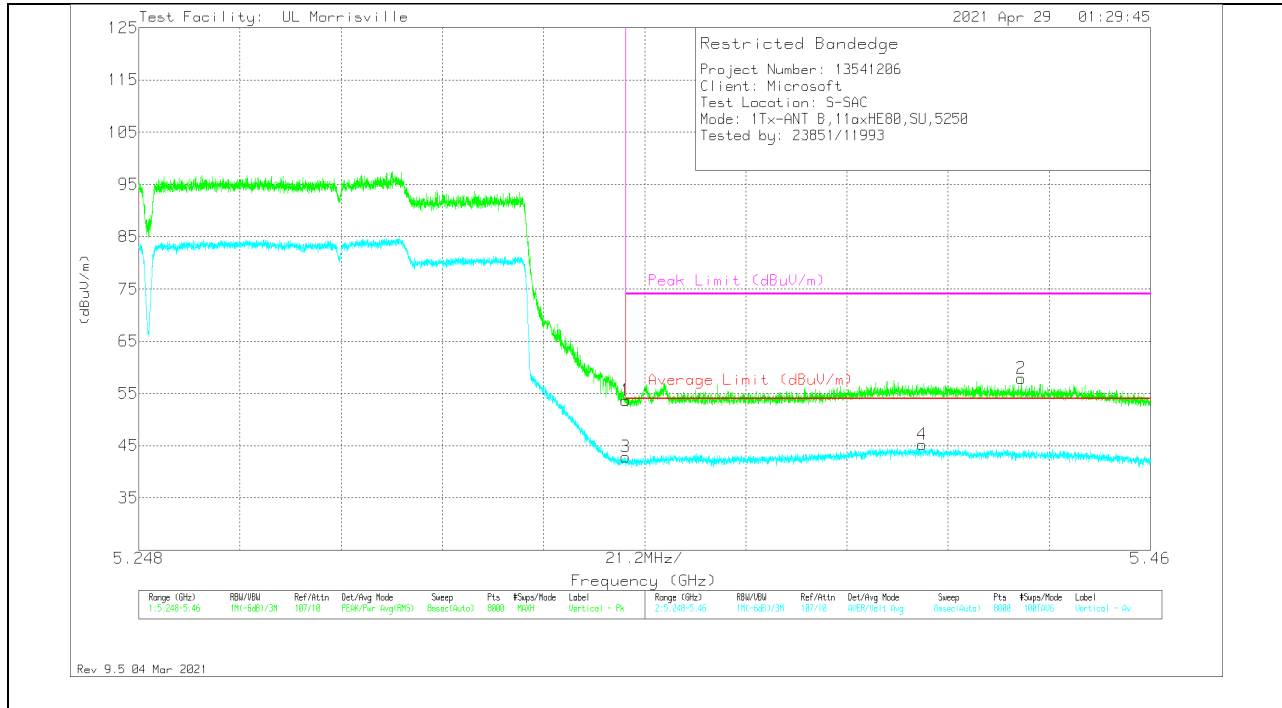

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	42.37	Pk	34.5	-23.2	0	53.67	-	-	74	-20.33	70	222	V
2	* ** 5.43296	46.65	Pk	34.6	-23.4	0	57.85	-	-	74	-16.15	70	222	V
3	* ** 5.35001	31.04	ADV	34.5	-23.2	.46	42.8	54	-11.2	-	-	70	222	V
4	* ** 5.41211	33.52	ADV	34.5	-23.3	.46	45.18	54	-8.82	-	-	70	222	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

11. SETUP PHOTOS

Please refer to R13541206-EP2 for setup photos.

END OF TEST REPORT