



LOW CHANNEL

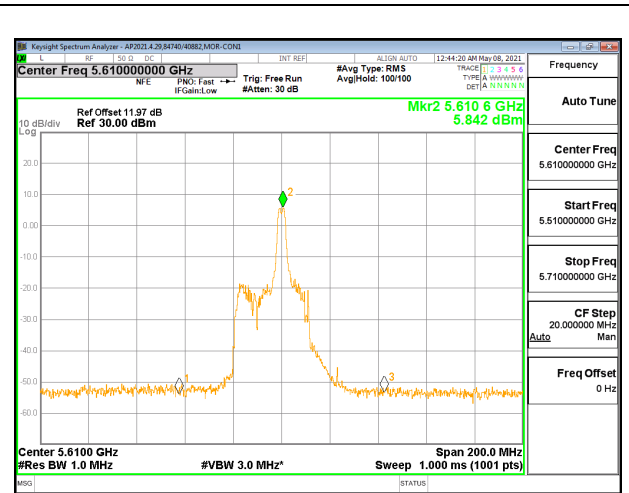

HIGH CHANNEL

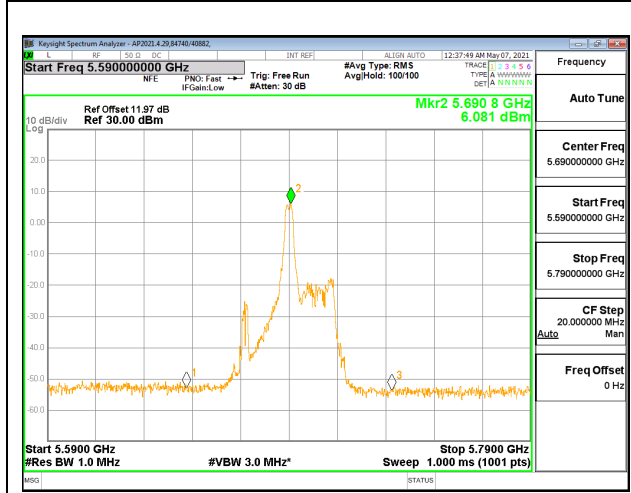

CHANNEL 138

INTENTIONALLY LEFT BLANK

1TX Antenna B OFDMA MODE: 26-Tones, RU Index 36

Test Engineer:	84740/40882
Test Date:	2021-05-03 – 2021-05-08

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5530	20.6000	3.5209	6.90
High	5610	20.4000	3.0988	6.90
138	5690	13.4000	2.1562	6.90

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5530	23.10	16.47	22.47	15.57	10.10	11.00	10.10
High	5610	23.10	15.91	21.91	15.01	10.10	11.00	10.10
138	5690	21.37	14.34	20.34	13.44	10.10	11.00	10.10


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	12.070	12.07	15.57	-3.50
High	5610	11.800	11.80	15.01	-3.21
138	5690	11.910	11.91	13.44	-1.53

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	7.431	7.431	10.10	-2.67
High	5610	7.081	7.081	10.10	-3.02
138	5690	7.847	7.847	10.10	-2.25

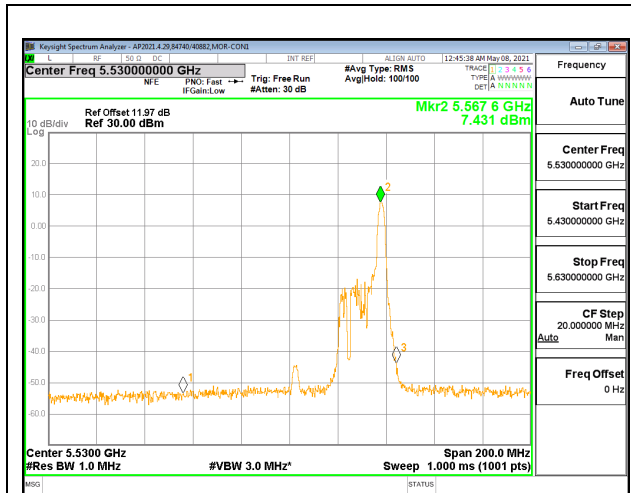

LOW CHANNEL

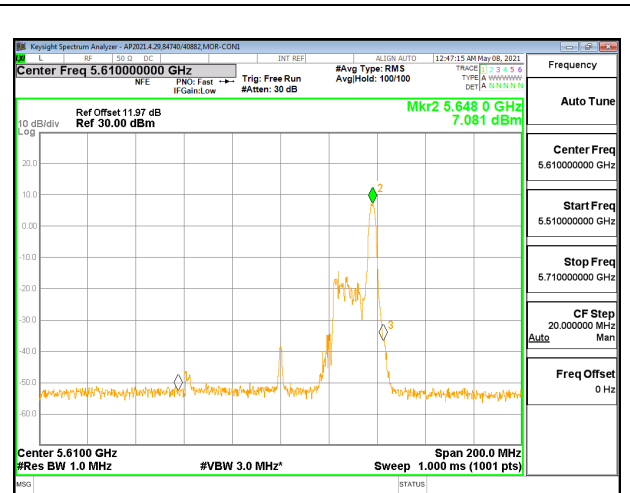

HIGH CHANNEL

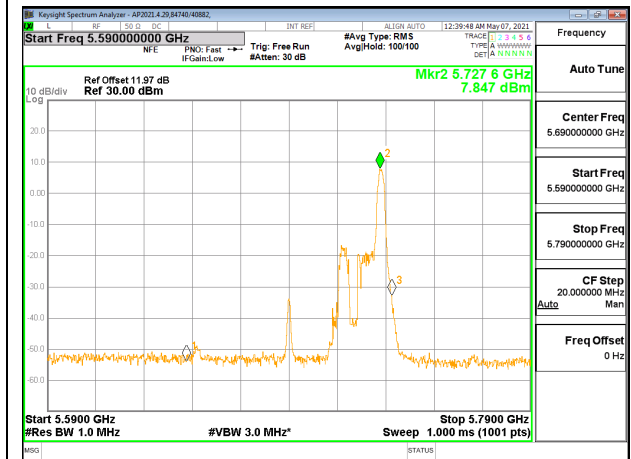

CHANNEL 138

INTENTIONALLY LEFT BLANK

9.4.7. 802.11ax HE160 MODE 2TX IN THE 5.6GHz BAND (FCC+IC)

2TX Antenna A + Antenna B SDM OFDMA MODE: SU, Single User

Test Engineer:	85502/40882
Test Date:	2021-05-04 – 2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
Low	5570	161.2000	153.2100	6.66	6.66

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.34	24.00	30.00	23.34	10.34	11.00	10.34



Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Antenna 1 Meas Power (dBm)	Antenna 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margi (dB)
Low	5570	12.73	12.70	15.73	23.34	-7.61

PSD Results

Channel	Frequency (MHz)	Antenna 1 Meas PSD (dBm/ 1MHz)	Antenna 2 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margi (dB)
Low	5570	-7.170	-7.578	-4.13	10.34	-14.47

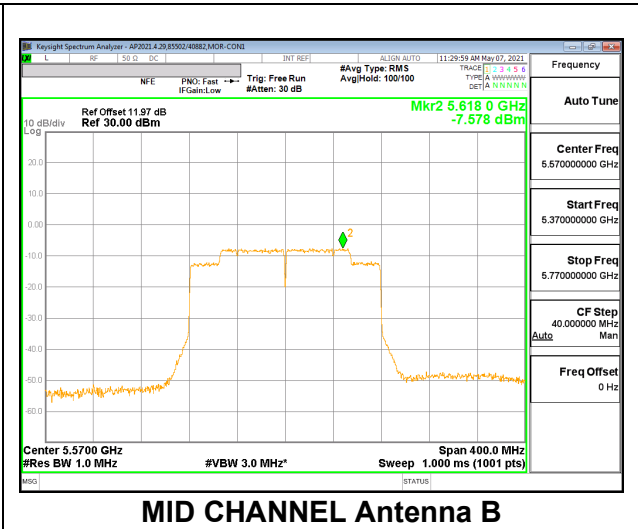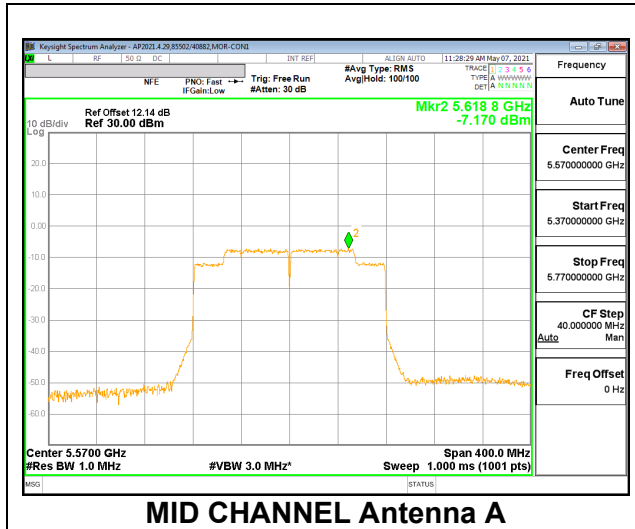

9.4.8. 802.11ax HE160 MODE 1TX IN THE 5.6GHz BAND (FCC+IC)

1TX Antenna A OFDMA MODE: SU, Single User

Test Engineer:	85502/40882
Test Date:	2021-05-04 – 2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	161.0000	153.2100	6.40

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.60	24.00	30.00	23.60	10.60	11.00	10.60


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	13.730	13.73	23.60	-9.87

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	-7.398	-7.17	10.60	-17.77

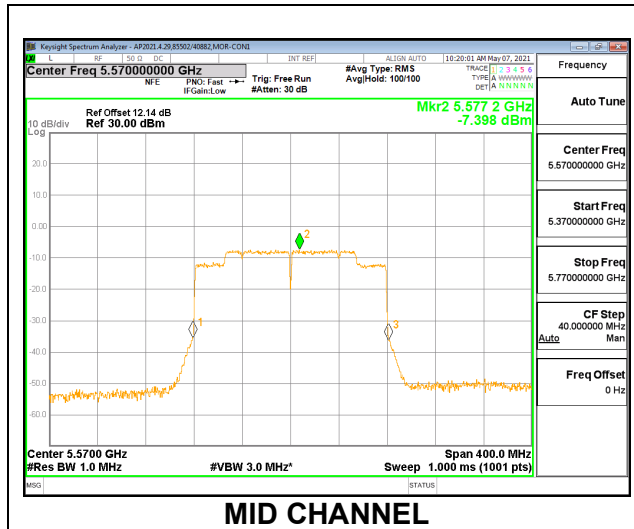

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 61

Test Engineer:	85502/40882
Test Date:	2021-05-04 – 2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	22.8000	18.4930	6.40

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.60	23.67	29.67	23.27	10.60	11.00	10.60


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	15.850	15.85	23.27	-7.42

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	4.934	4.93	10.60	-5.67

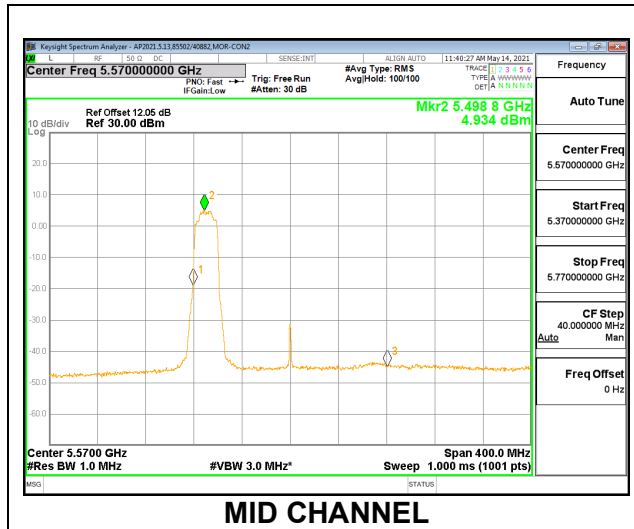

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 62

Test Engineer:	85502/40882
Test Date:	2021-05-04 – 2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	41.6000	23.6040	6.40

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.60	24.00	30.00	23.60	10.60	11.00	10.60


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	18.730	18.73	23.60	-4.87

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	6.295	6.30	10.60	-4.31

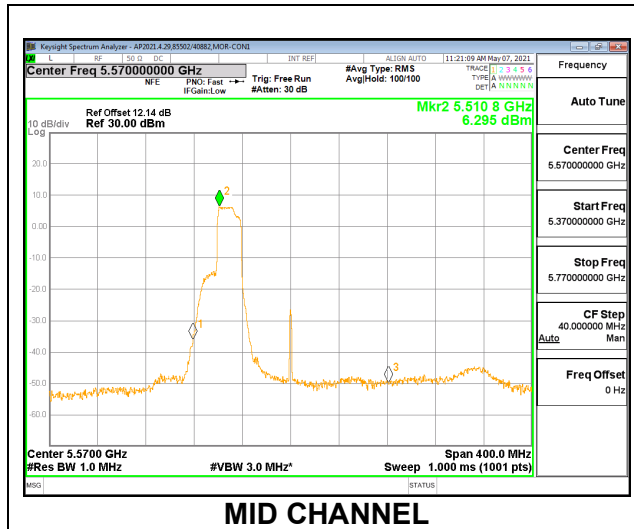

1TX Antenna A OFDMA MODE: 242-Tones, RU Index 64

Test Engineer:	85502/40882
Test Date:	2021-05-04 – 2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	24.00	18.7600	6.40

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.60	23.73	29.73	23.33	10.60	11.00	10.60


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	18.240	18.24	23.33	-5.09

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	6.265	6.27	10.60	-4.34

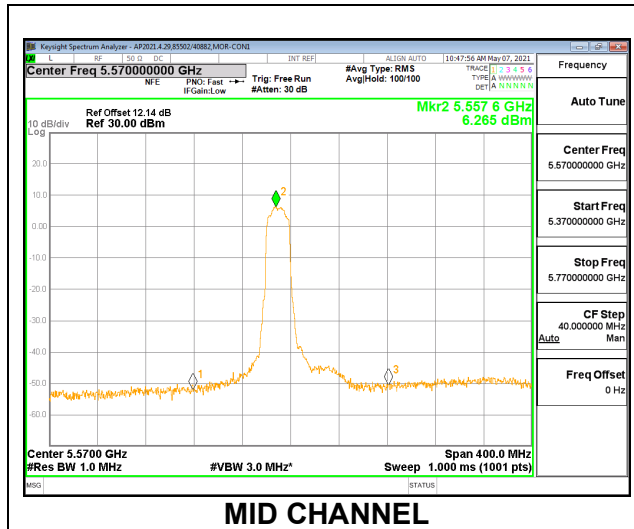

1TX Antenna A OFDMA MODE: 242-Tones, RU Index S64

Test Engineer:	85502/40882
Test Date:	2021-05-04 – 2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	24.0000	18.5160	6.40

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.60	23.68	29.68	23.28	10.60	11.00	10.60


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	17.970	17.97	23.28	-5.31

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	6.328	6.33	10.60	-4.27

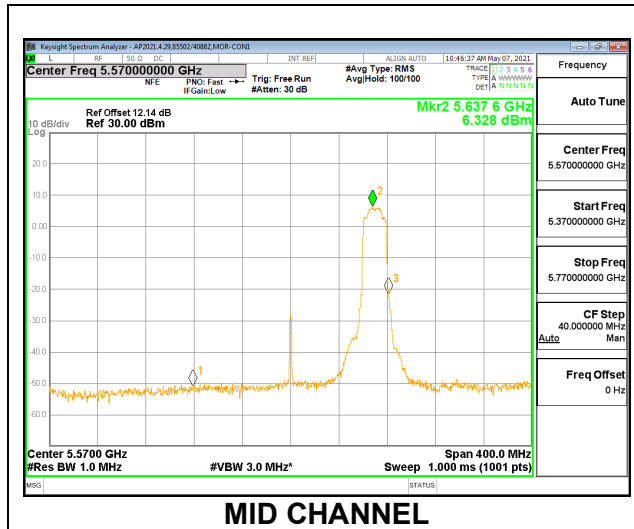

1TX Antenna B OFDMA MODE: SU, Single User

Test Engineer:	85502/40882
Test Date:	2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	161.20	154.3600	6.90

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.10	24.00	30.00	23.10	10.10	11.00	10.10


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	13.680	13.68	23.10	-9.42

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	-7.394	-7.16	10.10	-17.26

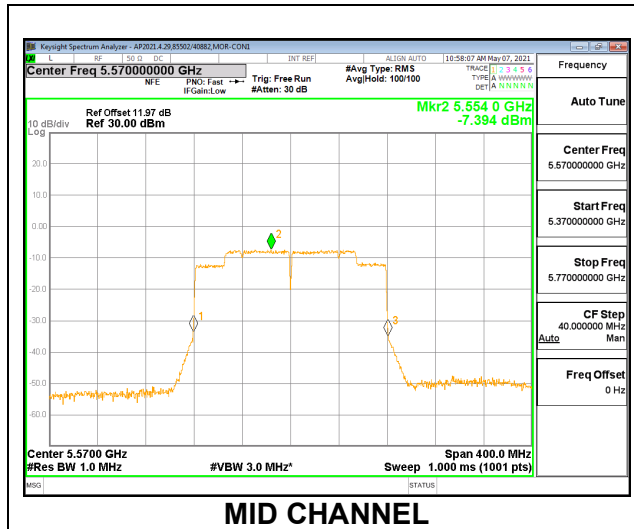

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 61

Test Engineer:	85502/40882
Test Date:	2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	24.0000	19.2730	6.90

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.10	23.85	29.85	22.95	10.10	11.00	10.10


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	15.620	15.62	22.95	-7.33

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	3.660	3.66	10.10	-6.44

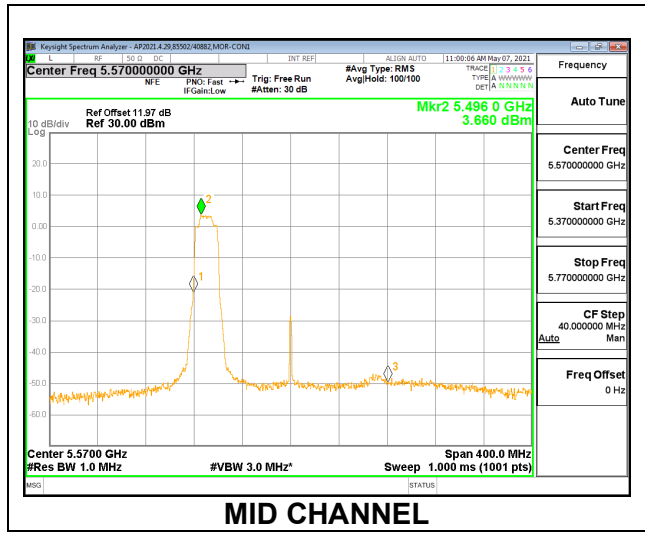

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 62

Test Engineer:	85502/40882
Test Date:	2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	40.8000	22.9460	6.90

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.10	24.00	30.00	23.10	10.10	11.00	10.10


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	16.530	16.53	23.10	-6.57

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	4.006	4.01	10.10	-6.09

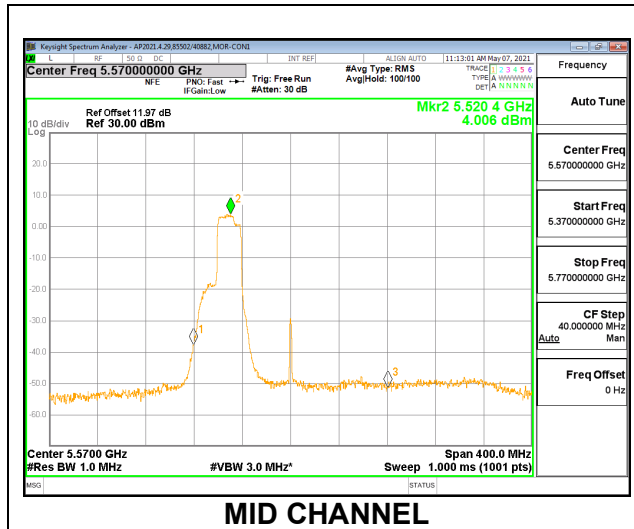

1TX Antenna B OFDMA MODE: 242-Tones, RU Index 64

Test Engineer:	85502/40882
Test Date:	2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	24.80	19.0020	6.90

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.10	23.79	29.79	22.89	10.10	11.00	10.10


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	15.640	15.64	22.89	-7.25

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	3.664	3.66	10.10	-6.44

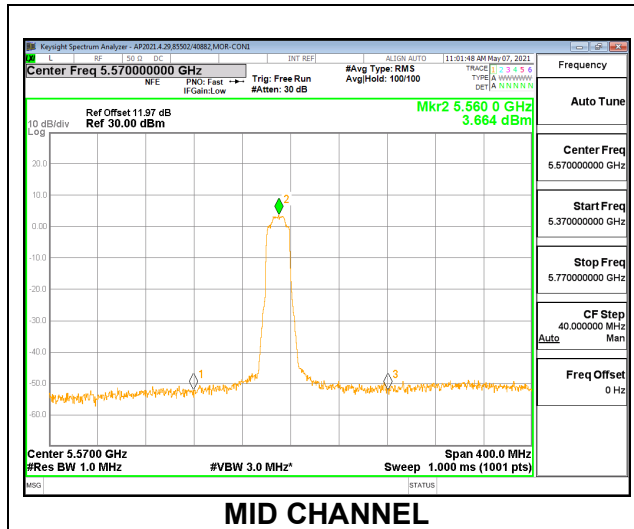

1TX Antenna B OFDMA MODE: 242-Tones, RU Index S64

Test Engineer:	85502/40882
Test Date:	2021-05-07

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5570	24.0000	18.7750	6.90

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm/ 1MHz)	ISED PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5570	23.10	23.74	29.74	22.84	10.10	11.00	10.10


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5570	15.320	15.32	22.84	-7.52

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5570	3.017	3.02	10.10	-7.08

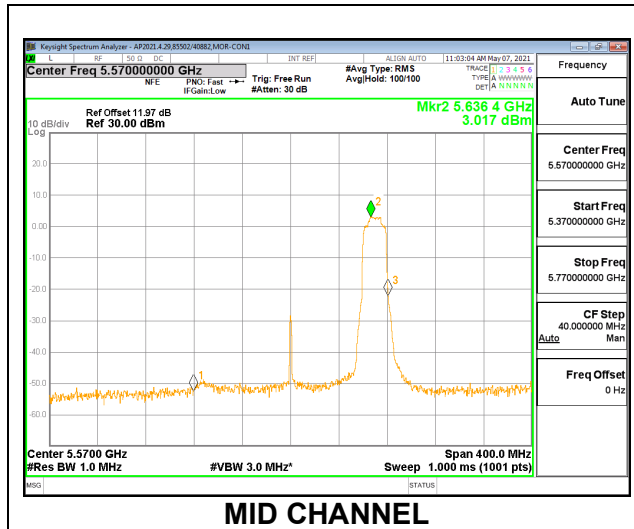

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands
FCC §15.407(b)(3) -Un-Restricted bands

After January 01, 2019 for Outside of the Restricted Bands Emissions

RSS 247 Issue 2 Sections
6.2.3.2 (for 5470-5600 MHz and 5650-5725 MHz bands)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

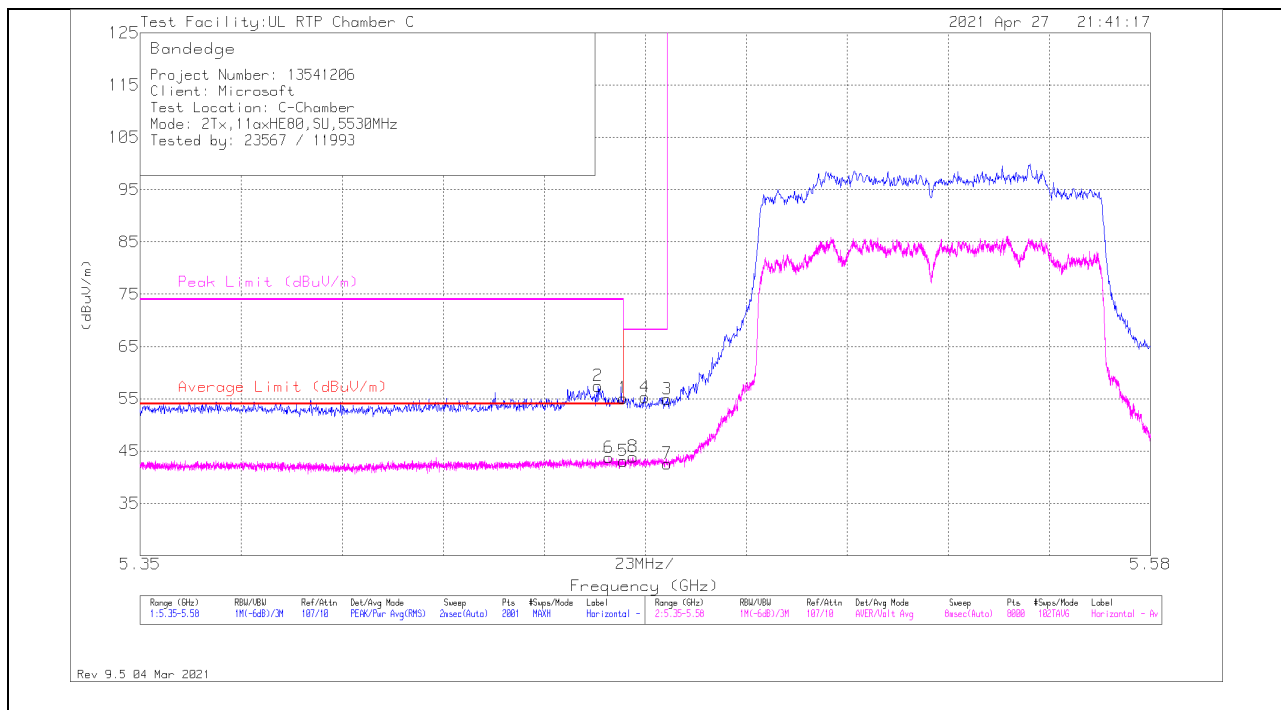

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	33.42	Pk	34.8	-13.1	0	55.12	-	-	74	-18.88	215	179	H
2	*** 5.45419	35.85	Pk	34.8	-13.2	0	57.45	-	-	74	-16.55	215	179	H
5	*** 5.45998	21.14	ADV	34.8	-13.1	.24	43.08	54	-10.92	-	-	215	179	H
6	*** 5.45671	21.89	ADV	34.8	-13.2	.24	43.73	54	-10.27	-	-	215	179	H
8	5.46223	21.95	ADV	34.8	-13.1	.24	43.89	-	-	-	-	215	179	H
4	5.46489	33.58	Pk	34.8	-13.1	0	55.28	-	-	68.2	-12.92	215	179	H
3	5.46995	33.3	Pk	34.8	-13.2	0	54.9	-	-	68.2	-13.3	215	179	H
7	5.46999	20.69	ADV	34.8	-13.2	.24	42.53	-	-	-	-	215	179	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

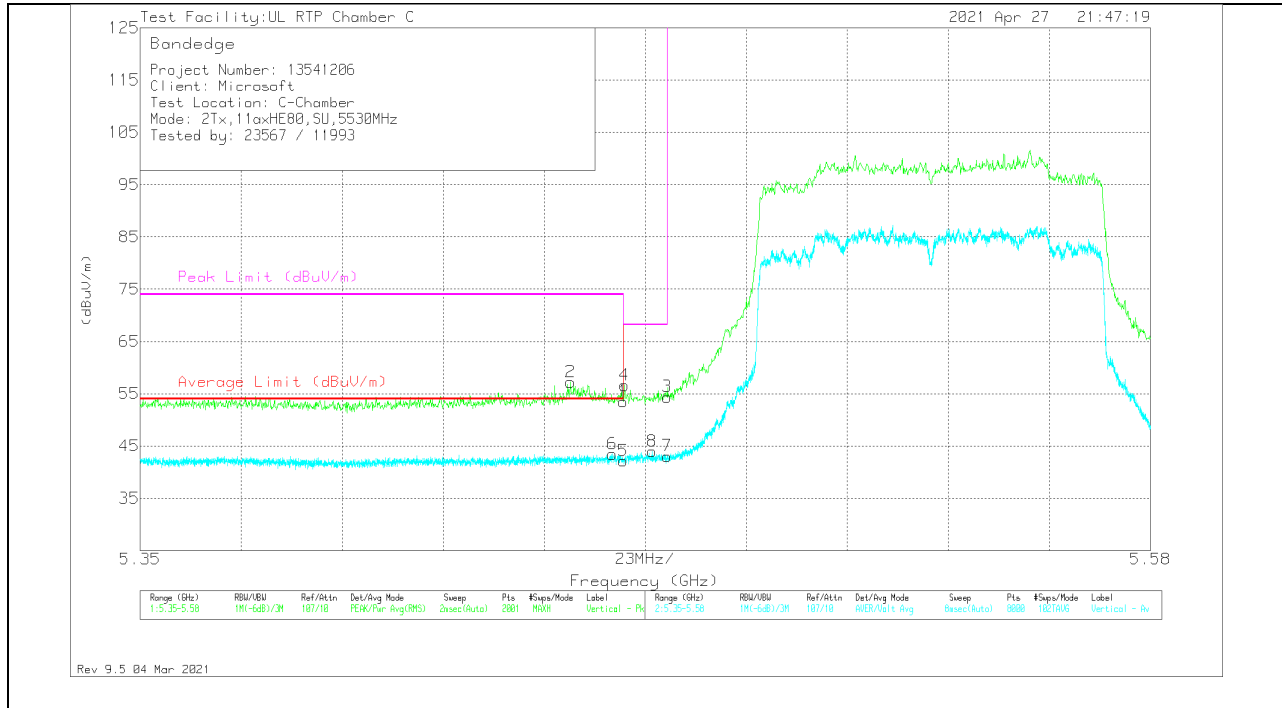

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	31.81	Pk	34.8	-13.1	0	53.51	-	-	74	-20.49	209	325	V
2	*** 5.44798	35.63	Pk	34.8	-13.2	0	57.23	-	-	74	-16.77	209	325	V
5	*** 5.45998	20.22	ADV	34.8	-13.1	.24	42.16	54	-11.84	-	-	209	325	V
6	*** 5.45748	21.61	ADV	34.8	-13.2	.24	43.45	54	-10.55	-	-	209	325	V
4	5.46029	34.92	Pk	34.8	-13.1	0	56.62	-	-	68.2	-11.58	209	325	V
8	5.4666	22.02	ADV	34.8	-13.1	.24	43.96	-	-	-	-	209	325	V
3	5.46995	32.8	Pk	34.8	-13.2	0	54.4	-	-	68.2	-13.8	209	325	V
7	5.46999	21.23	ADV	34.8	-13.2	.24	43.07	-	-	-	-	209	325	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

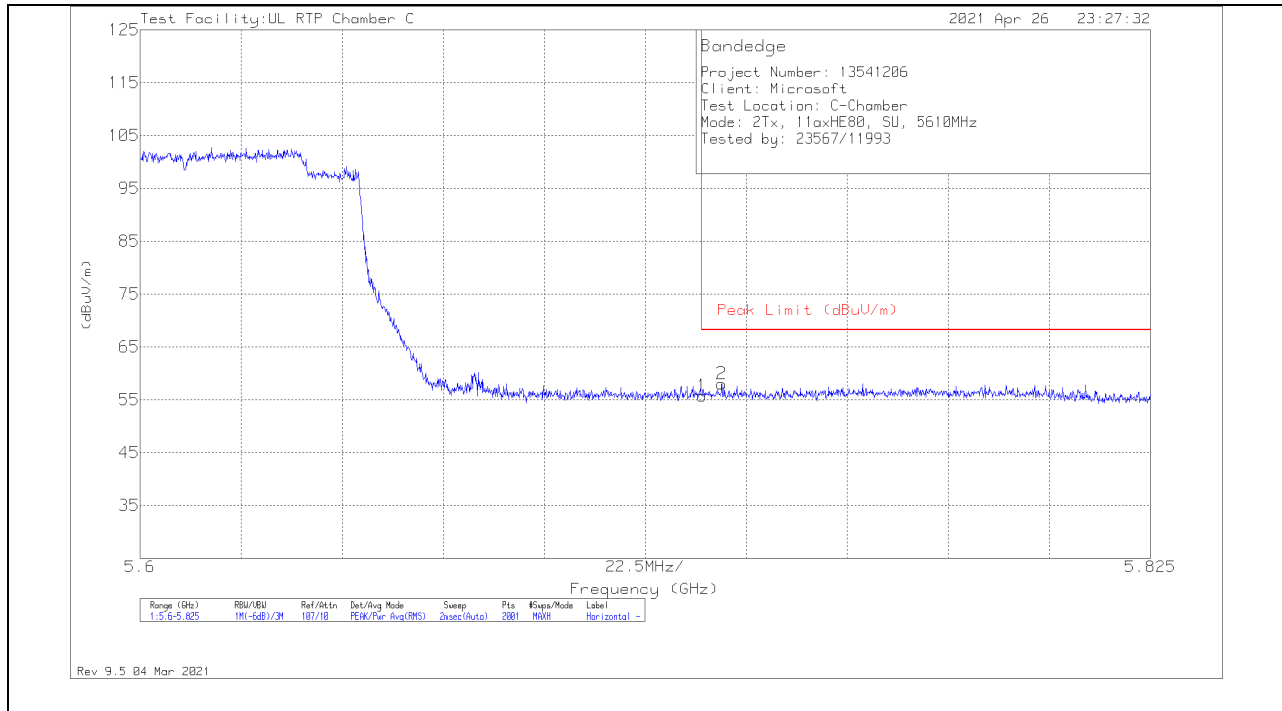

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	33.52	Pk	34.8	-12.6	55.72	68.2	-12.48	22	209	H
2	5.72949	35.81	Pk	34.8	-12.6	58.01	68.2	-10.19	22	209	H

Pk - Peak detector

VERTICAL RESULT

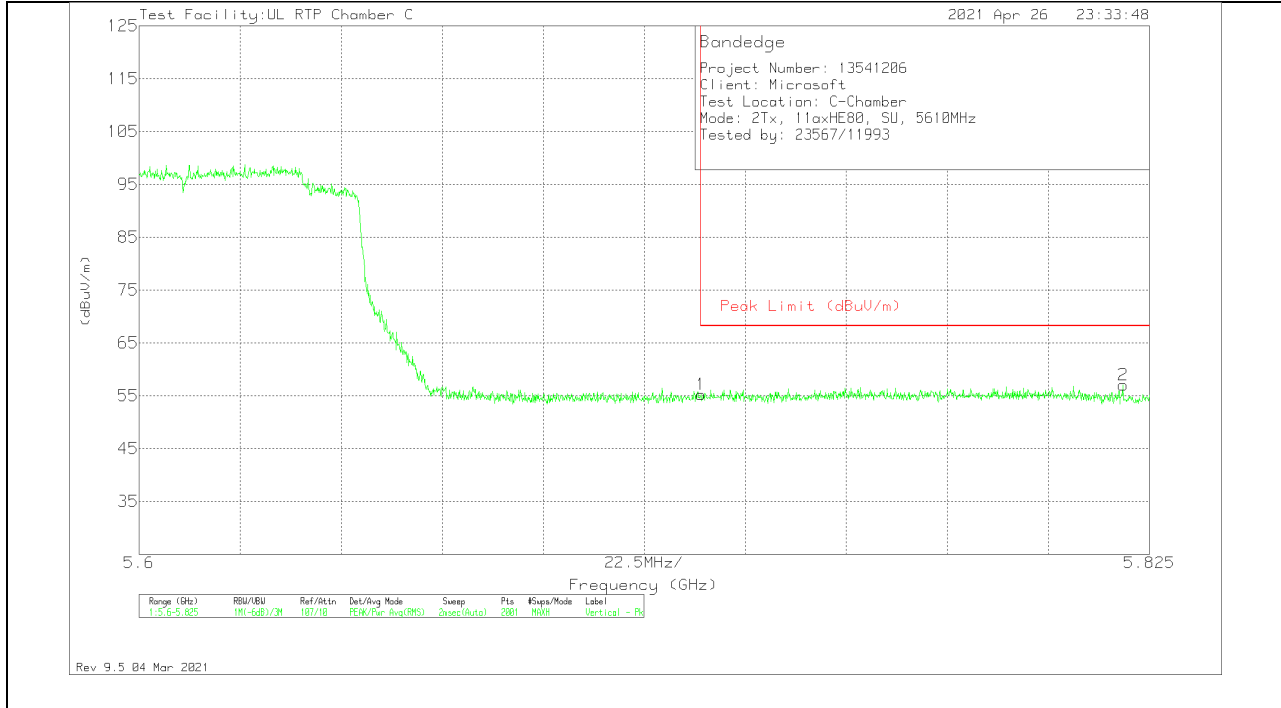


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	33	Pk	34.8	-12.6	55.2	68.2	-13	4	287	V
2	5.81915	34.32	Pk	35.1	-12.4	57.02	68.2	-11.18	4	287	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

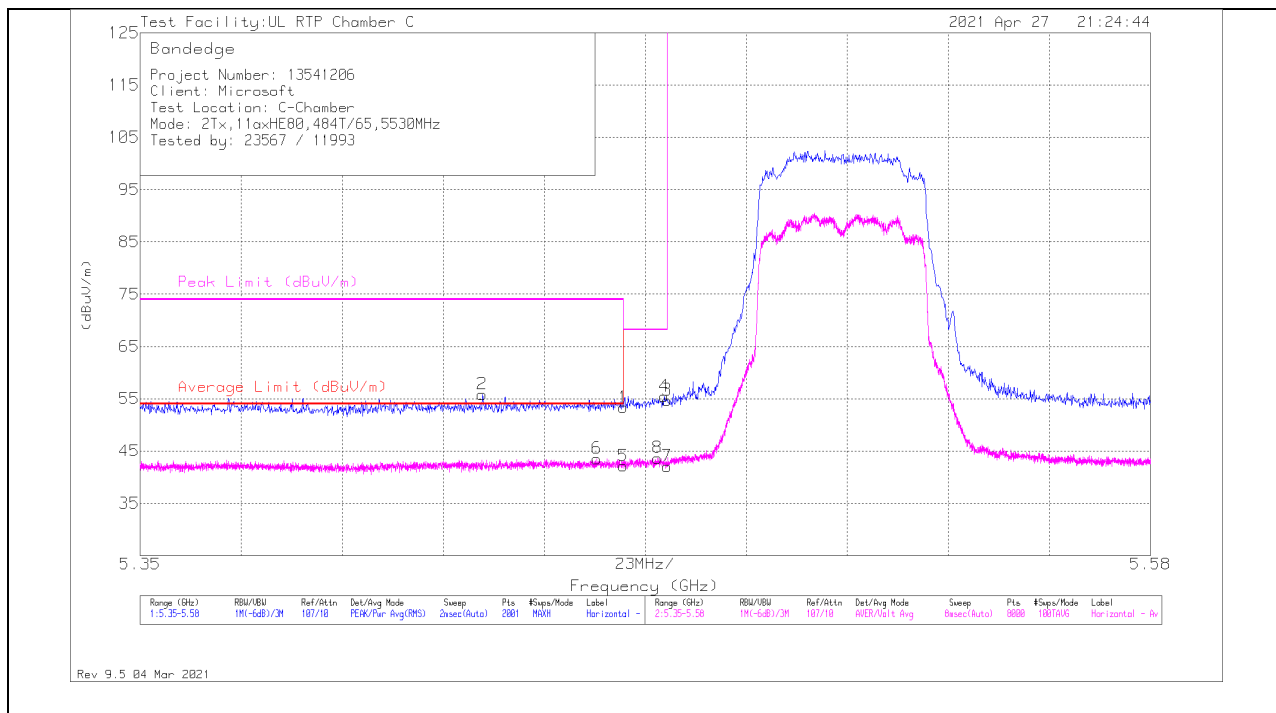

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45994	31.64	Pk	34.8	-13.1	53.34	-	-	74	-20.66	210	312	H
2	* ** 5.42786	34.45	Pk	34.8	-13.4	55.85	-	-	74	-18.15	210	312	H
5	* ** 5.45998	20.44	ADV	34.8	-13.1	42.14	54	-11.86	-	-	210	312	H
6	* ** 5.45392	21.96	ADV	34.8	-13.2	43.56	54	-10.44	-	-	210	312	H
8	5.46775	21.98	ADV	34.8	-13.1	43.68	-	-	-	-	210	312	H
4	5.46926	33.85	Pk	34.8	-13.2	55.45	-	-	68.2	-12.75	210	312	H
3	5.46995	33.14	Pk	34.8	-13.2	54.74	-	-	68.2	-13.46	210	312	H
7	5.46999	20.49	ADV	34.8	-13.2	42.09	-	-	-	-	210	312	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

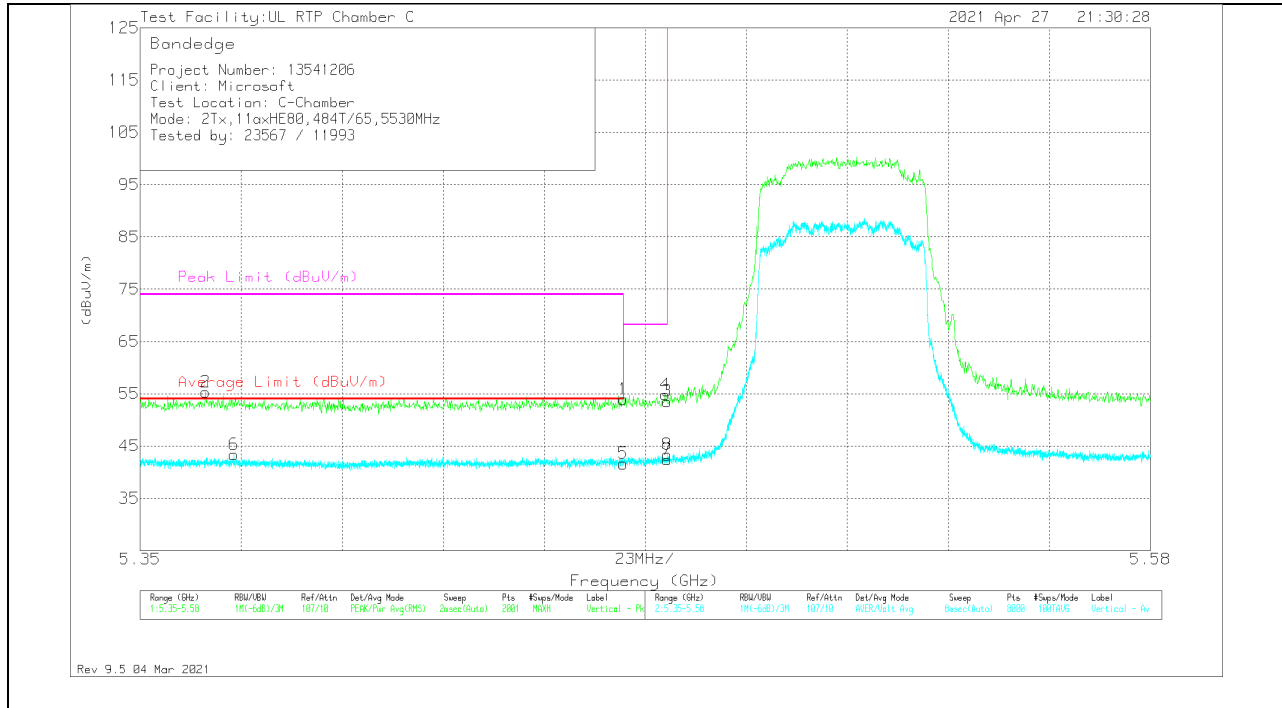

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	32.24	Pk	34.8	-13.1	53.94	-	-	74	-20.06	212	328	V
2	*** 5.36495	33.81	Pk	34.8	-13.3	55.31	-	-	74	-18.69	212	328	V
5	*** 5.45998	19.93	ADV	34.8	-13.1	41.63	54	-12.37	-	-	212	328	V
6	*** 5.37134	21.95	ADV	34.8	-13.4	43.35	54	-10.65	-	-	212	328	V
4	5.4696	33.21	Pk	34.8	-13.2	54.81	-	-	68.2	-13.39	212	328	V
3	5.46995	31.94	Pk	34.8	-13.2	53.54	-	-	68.2	-14.66	212	328	V
8	5.46996	21.74	ADV	34.8	-13.2	43.34	-	-	-	-	212	328	V
7	5.46999	20.79	ADV	34.8	-13.2	42.39	-	-	-	-	212	328	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 484-Tones, RU Index 66

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

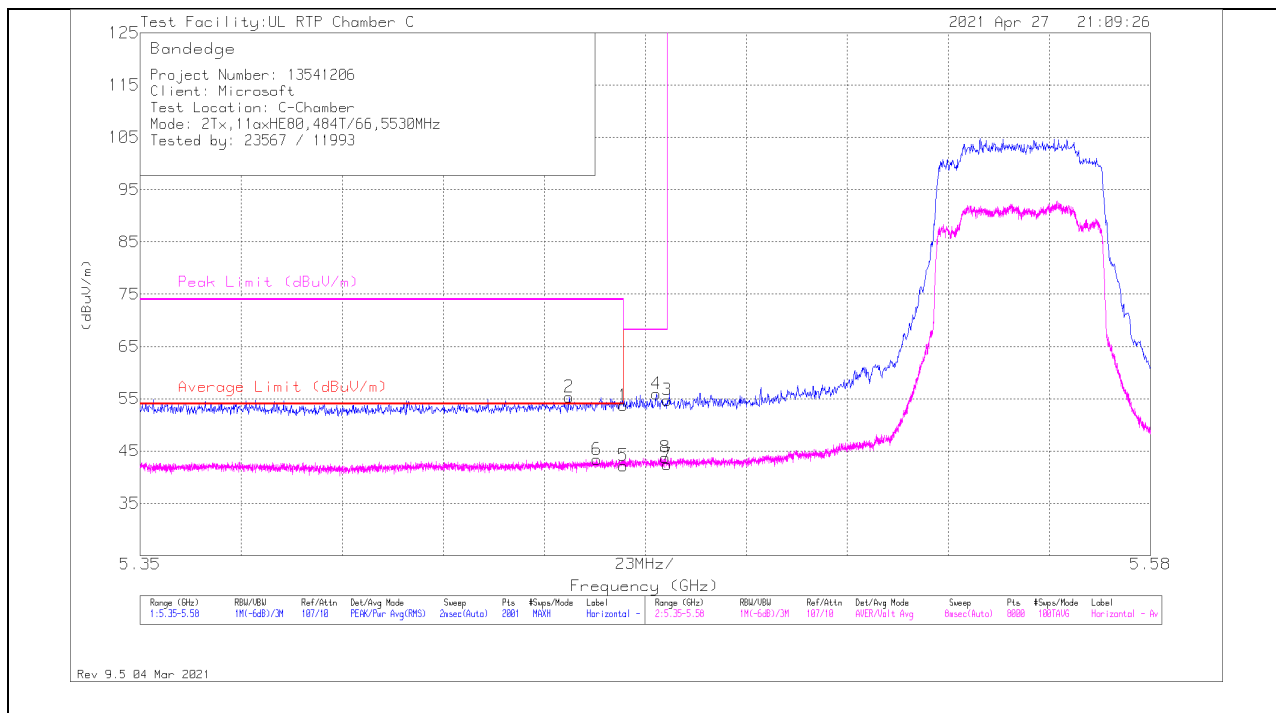

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45994	32.03	Pk	34.8	-13.1	53.73	-	-	74	-20.27	186	284	H
2	* ** 5.44764	33.74	Pk	34.8	-13.2	55.34	-	-	74	-18.66	186	284	H
5	* ** 5.45998	20.49	ADV	34.8	-13.1	42.19	54	-11.81	-	-	186	284	H
6	* ** 5.454	21.78	ADV	34.8	-13.2	43.38	54	-10.62	-	-	186	284	H
4	5.46753	34.23	Pk	34.8	-13.1	55.93	-	-	68.2	-12.27	186	284	H
8	5.46959	22.2	ADV	34.8	-13.2	43.8	-	-	-	-	186	284	H
3	5.46995	33.16	Pk	34.8	-13.2	54.76	-	-	68.2	-13.44	186	284	H
7	5.46999	20.82	ADV	34.8	-13.2	42.42	-	-	-	-	186	284	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

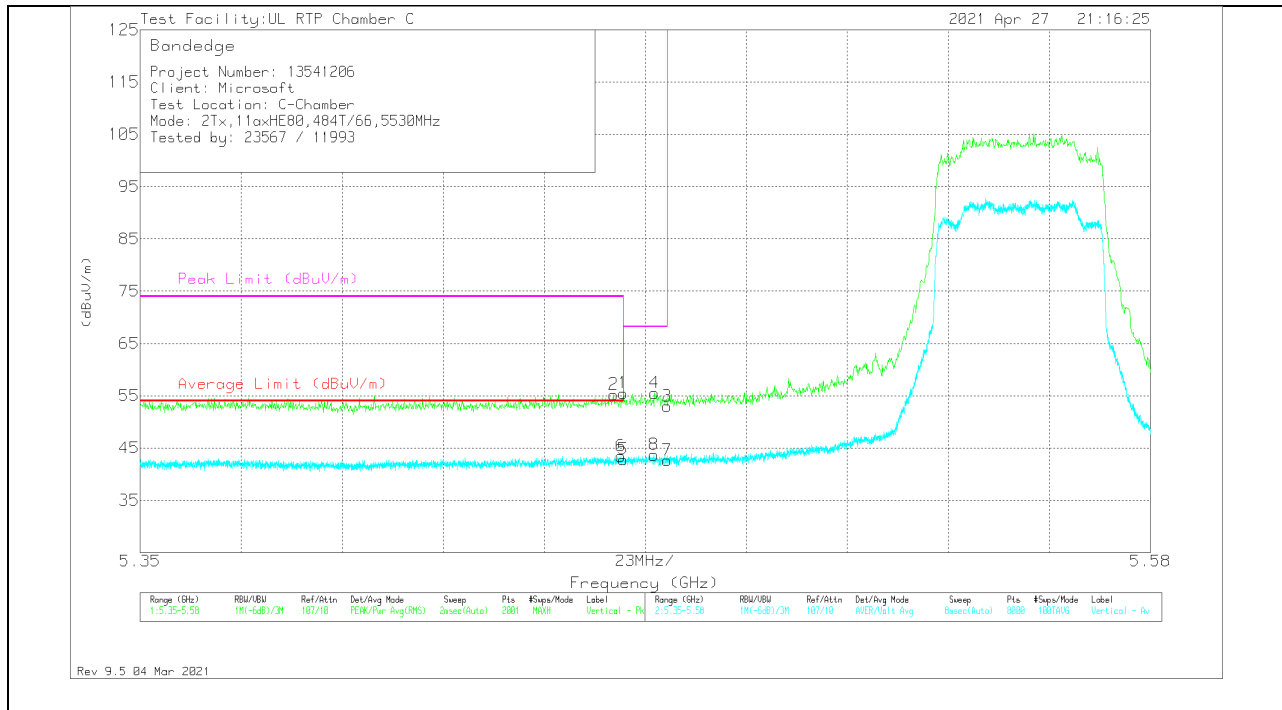

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	33.79	Pk	34.8	-13.1	55.49	-	-	74	-18.51	203	320	V
2	*** 5.45776	33.61	Pk	34.8	-13.2	55.21	-	-	74	-18.79	203	320	V
5	*** 5.45998	21.12	ADV	34.8	-13.1	42.82	54	-11.18	-	-	203	320	V
6	*** 5.45944	21.75	ADV	34.8	-13.1	43.45	54	-10.55	-	-	203	320	V
8	5.46697	22	ADV	34.8	-13.1	43.7	-	-	-	-	203	320	V
4	5.46707	33.81	Pk	34.8	-13.1	55.51	-	-	68.2	-12.69	203	320	V
3	5.46995	31.4	Pk	34.8	-13.2	53	-	-	68.2	-15.2	203	320	V
7	5.46999	21.04	ADV	34.8	-13.2	42.64	-	-	-	-	203	320	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

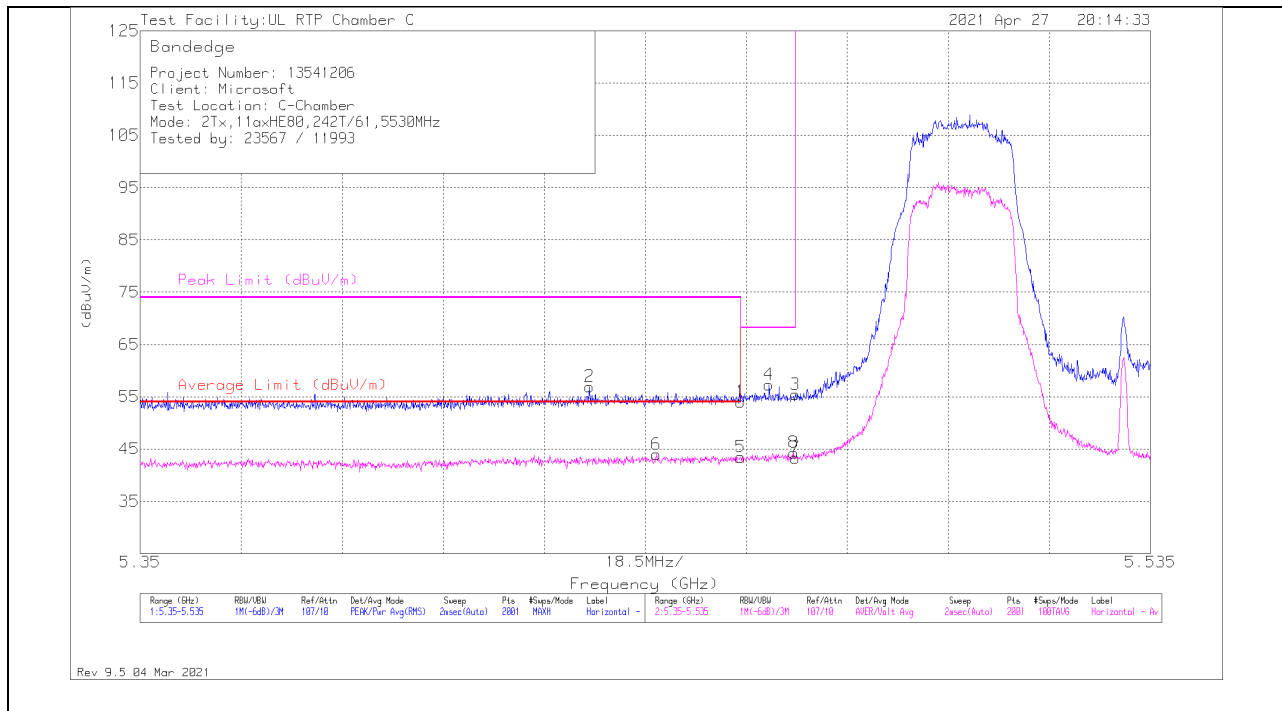

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45998	32.3	Pk	34.8	-13.1	54	-	-	74	-20	215	294	H
2	** * 5.43233	35.52	Pk	34.8	-13.4	56.92	-	-	74	-17.08	215	294	H
5	** * 5.45998	21.76	ADV	34.8	-13.1	43.46	54	-10.54	-	-	215	294	H
6	** * 5.44454	22.36	ADV	34.8	-13.2	43.96	54	-10.04	-	-	215	294	H
4	5.46516	35.61	Pk	34.8	-13.1	57.31	-	-	68.2	-10.89	215	294	H
8	5.4697	22.69	ADV	34.8	-13.2	44.29	-	-	-	-	215	294	H
3	5.46997	33.82	Pk	34.8	-13.2	55.42	-	-	68.2	-12.78	215	294	H
7	5.46997	21.73	ADV	34.8	-13.2	43.33	-	-	-	-	215	294	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

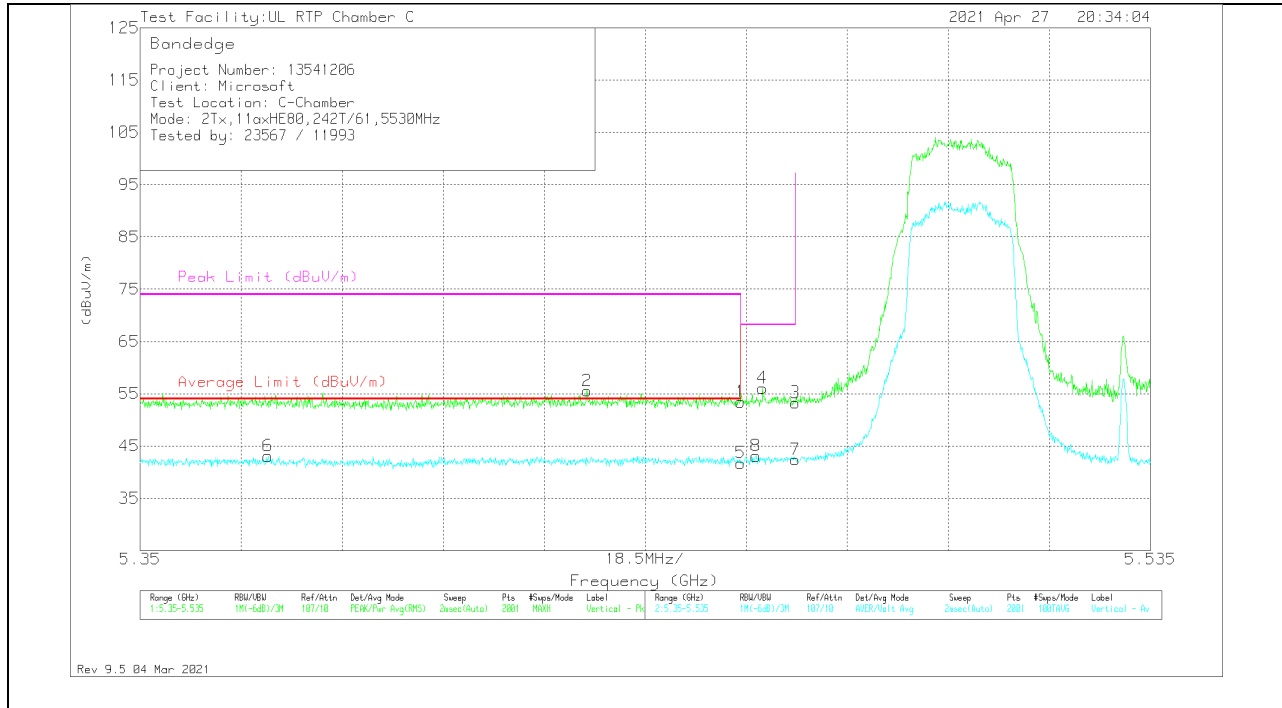

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	31.75	Pk	34.8	-13.1	53.45	-	-	74	-20.55	294	247	V
2	*** 5.43186	34.14	Pk	34.8	-13.4	55.54	-	-	74	-18.46	294	247	V
5	*** 5.45998	20.03	ADV	34.8	-13.1	41.73	54	-12.27	-	-	294	247	V
6	*** 5.3734	21.68	ADV	34.8	-13.4	43.08	54	-10.92	-	-	294	247	V
8	5.46276	21.39	ADV	34.8	-13.1	43.09	-	-	-	-	294	247	V
4	5.46396	34.37	Pk	34.8	-13.1	56.07	-	-	68.2	-12.13	294	247	V
3	5.46997	31.66	Pk	34.8	-13.2	53.26	-	-	68.2	-14.94	294	247	V
7	5.46997	20.8	ADV	34.8	-13.2	42.4	-	-	-	-	294	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW

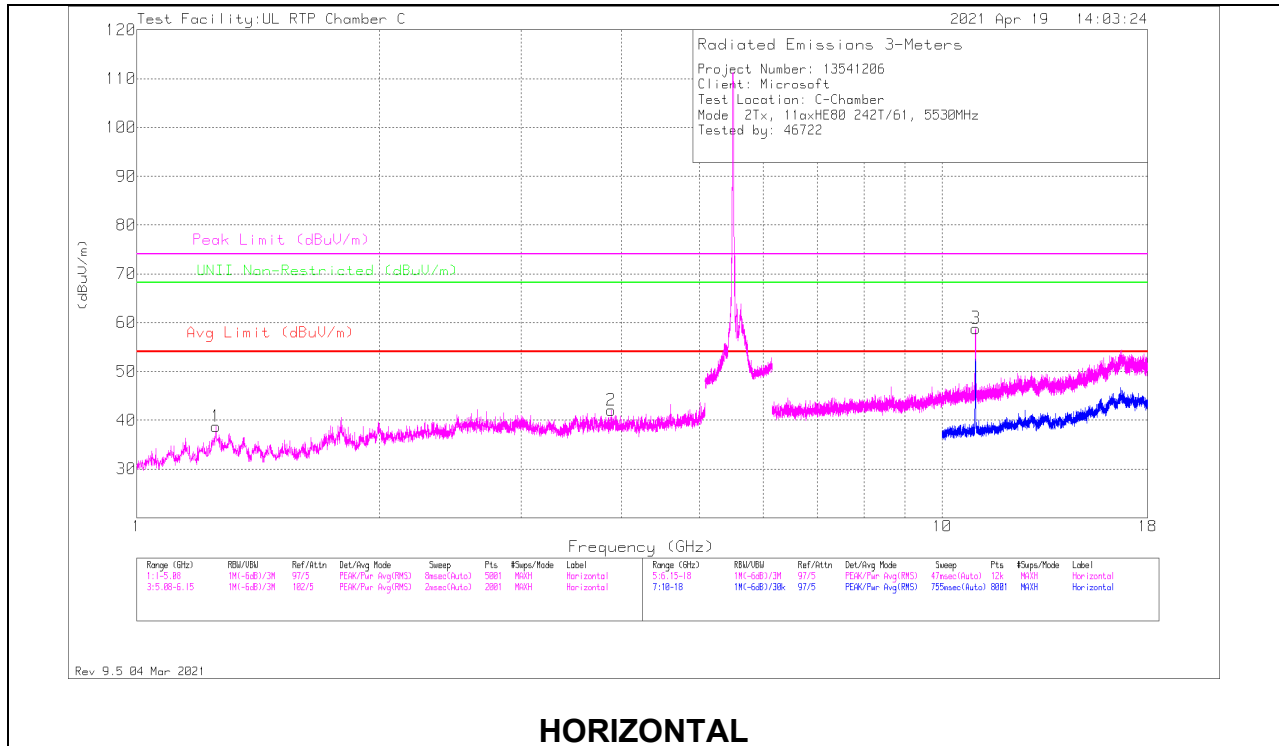

HORIZONTAL

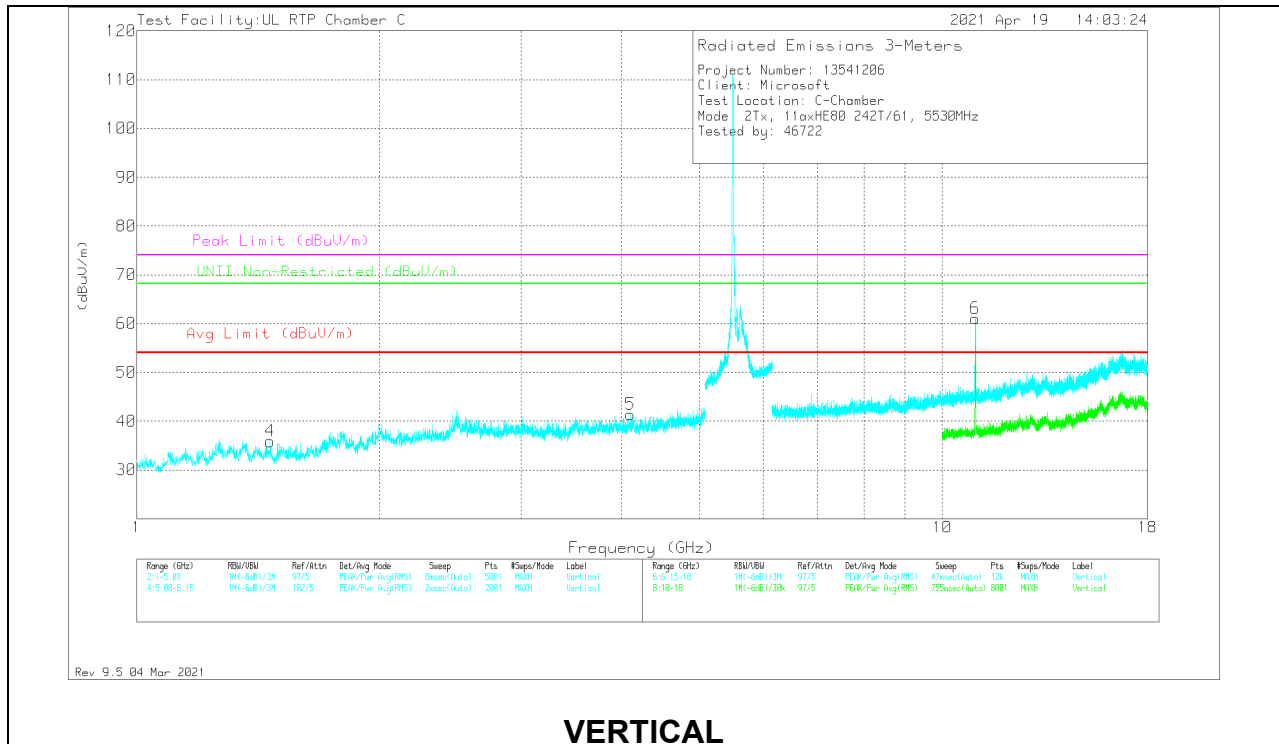

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.25378	64.01	Pk	28.4	-53.7	38.71	54	-15.29	74	-35.29	-	-	0-360	200	H
2	*** 3.8813	56.8	Pk	33.6	-48.4	42	54	-12	74	-32	-	-	0-360	101	H
4	*** 1.4643	60.26	Pk	28.2	-52.6	35.86	54	-18.14	74	-38.14	-	-	0-360	200	V
5	*** 4.1008	54.14	Pk	33.6	-46.4	41.34	54	-12.66	74	-32.66	-	-	0-360	101	V
3	*** 11.00347	64.62	PK-U	38	-39.7	62.92	-	-	74	-11.08	-	-	267	146	H
	*** 11.0029	51.87	ADV	38	-39.7	50.17	54	-3.83	-	-	-	-	267	146	H
6	*** 10.99833	67.92	PK-U	38	-39.3	66.62	-	-	74	-7.38	-	-	163	194	V
	*** 10.99895	54.39	ADV	38	-39.4	52.99	54	-1.01	-	-	-	-	163	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

HIGH

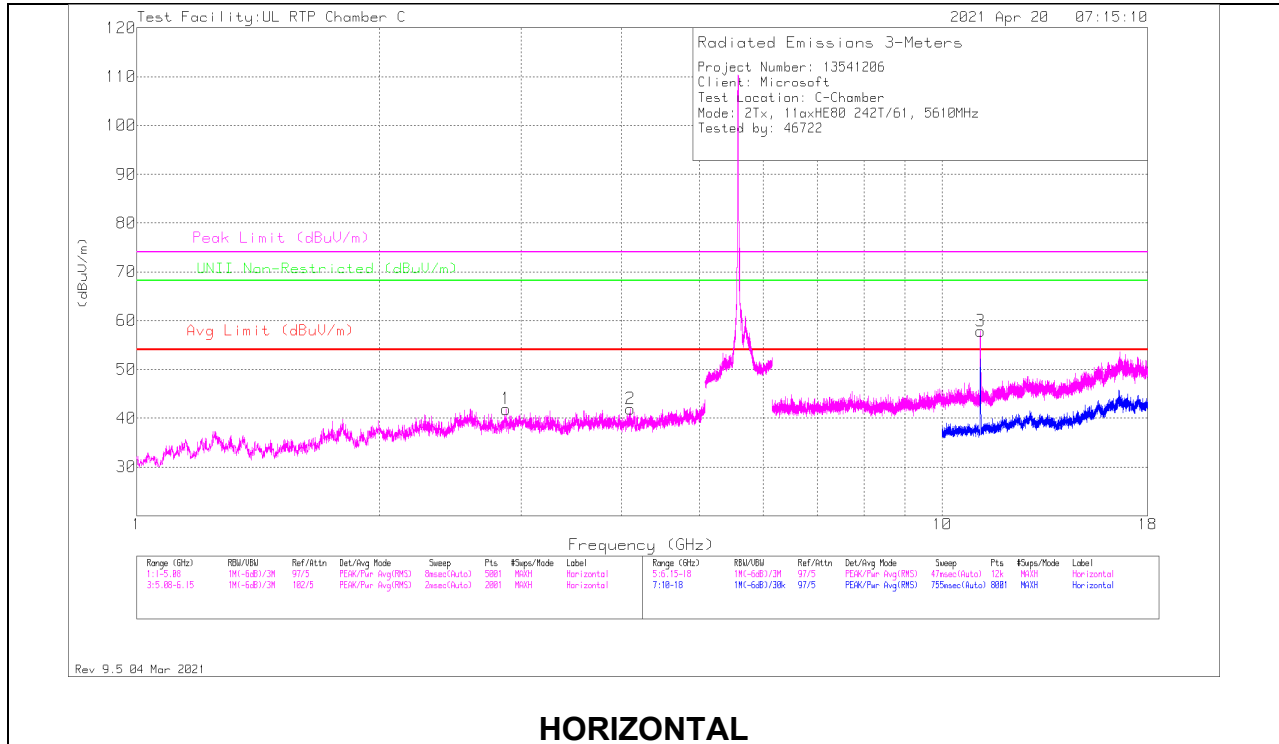

HORIZONTAL

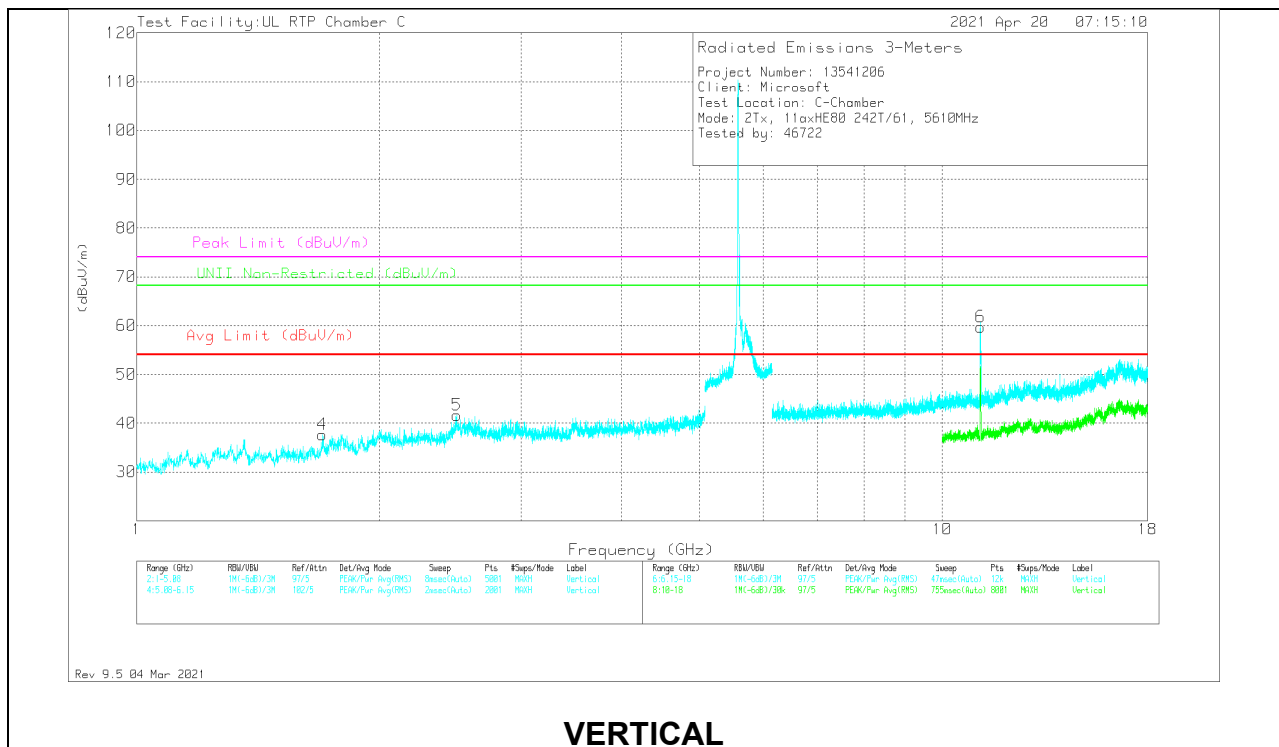

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.87354	58.84	Pk	32.5	-49.5	41.84	54	-12.16	74	-32.16	-	-	0-360	101	H
2	*** 4.09998	54.76	Pk	33.6	-46.5	41.86	54	-12.14	74	-32.14	-	-	0-360	101	H
4	*** 1.70094	61.2	Pk	28.9	-52.5	37.6	54	-16.4	74	-36.4	-	-	0-360	200	V
5	*** 2.49573	59.36	Pk	32.7	-50.4	41.66	54	-12.34	74	-32.34	-	-	0-360	200	V
3	*** 11.16534	63.01	PK-U	38.1	-39.9	61.21	-	-	74	-12.79	-	-	262	198	H
	*** 11.15994	49.42	ADV	38.1	-39.9	47.62	54	-6.38	-	-	-	-	262	198	H
6	*** 11.16096	66.92	PK-U	38.1	-39.9	65.12	-	-	74	-8.88	-	-	169	197	V
	*** 11.15932	54.29	ADV	38.1	-39.9	52.49	54	-1.51	-	-	-	-	169	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

CHANNEL 138

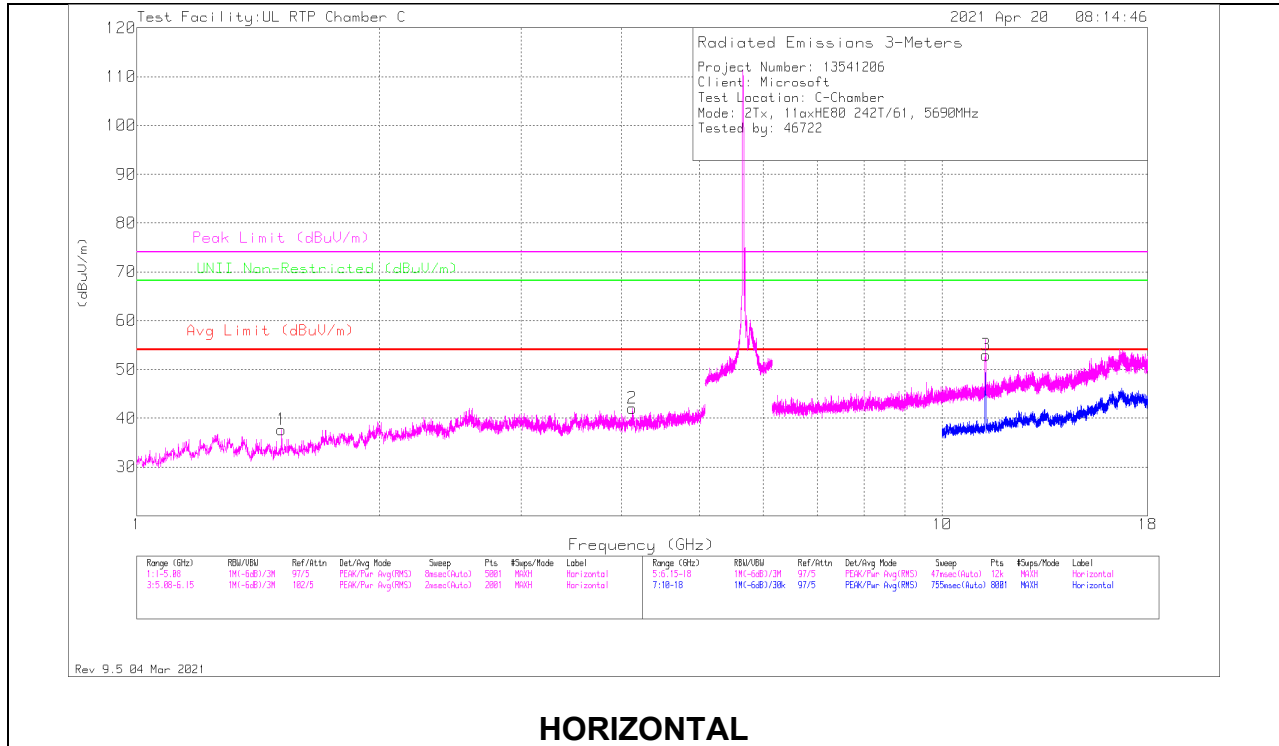

HORIZONTAL

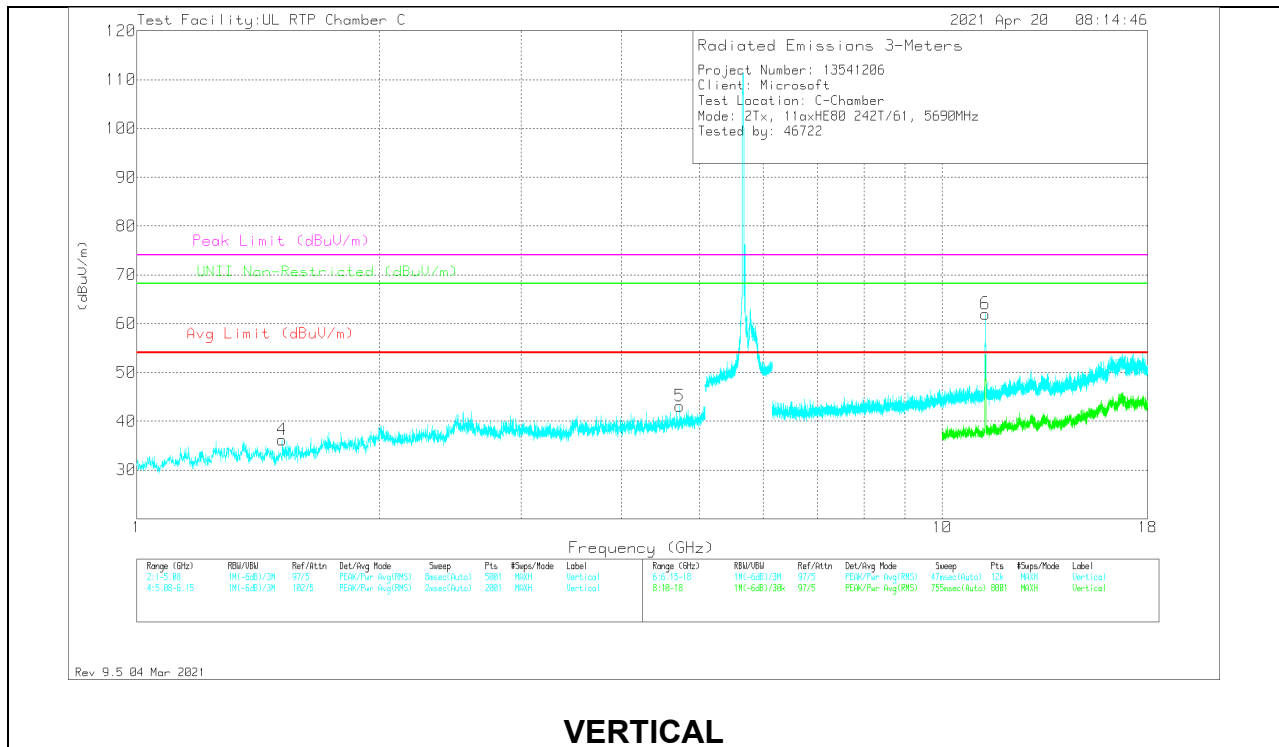

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.51326	62.35	Pk	28	-52.7	37.65	54	-16.35	74	-36.35	-	-	0-360	101	H
2	*** 4.12283	55.59	Pk	33.6	-47.1	42.09	54	-11.91	74	-31.91	-	-	0-360	101	H
4	*** 1.51571	60.93	Pk	28	-52.7	36.23	54	-17.77	74	-37.77	-	-	0-360	200	V
5	*** 4.72259	56.03	Pk	34.2	-47.1	43.13	54	-10.87	74	-30.87	-	-	0-360	101	V
3	*** 11.32122	61.98	PK-U	38.2	-39.3	60.88	-	-	74	-13.12	-	-	266	107	H
	*** 11.31917	48.6	ADV	38.2	-39.2	47.6	54	-6.4	-	-	-	-	266	107	H
6	*** 11.31636	66.09	PK-U	38.2	-39.2	65.09	-	-	74	-8.91	-	-	164	198	V
	*** 11.3211	53.29	ADV	38.2	-39.3	52.19	54	-1.81	-	-	-	-	164	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 242-Tones, RU Index 62

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

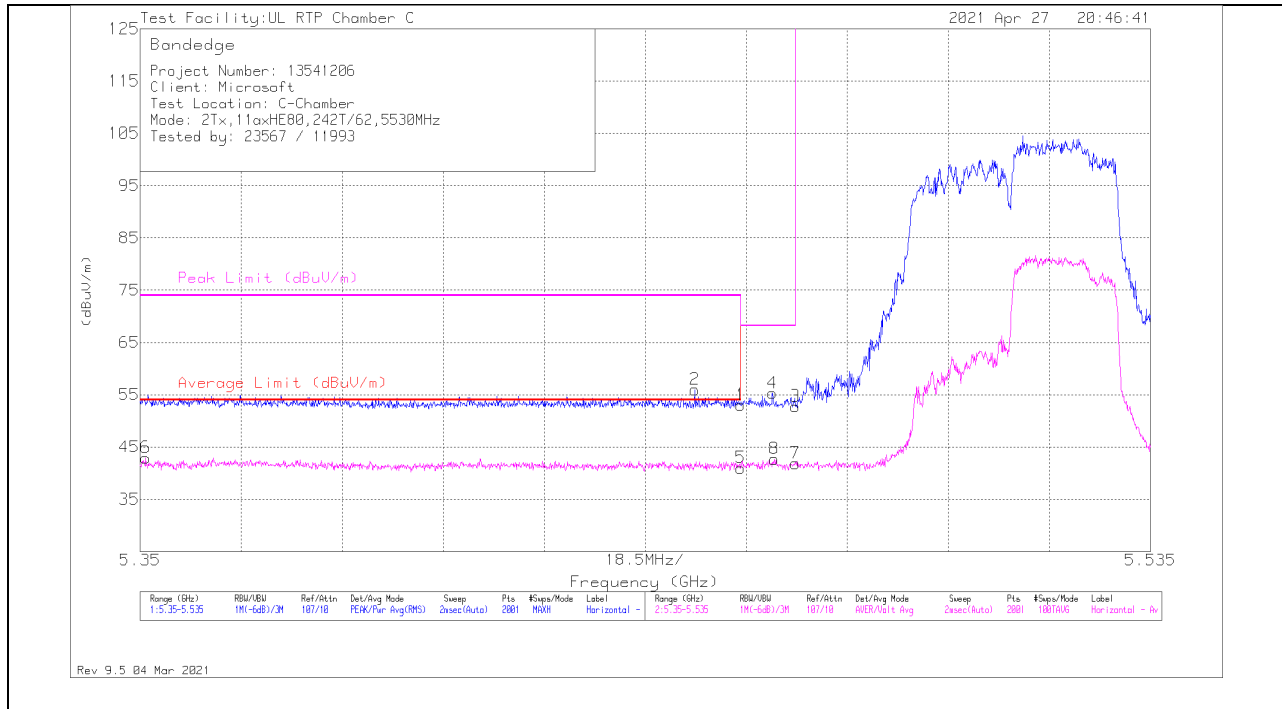

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45998	31.31	Pk	34.8	-13.1	53.01	-	-	74	-20.99	294	247	H
2	** * 5.45157	34.39	Pk	34.8	-13.2	55.99	-	-	74	-18.01	294	247	H
5	** * 5.45998	19.29	ADV	34.8	-13.1	40.99	54	-13.01	-	-	294	247	H
6	** * 5.35102	21.45	ADV	34.7	-13.2	42.95	54	-11.05	-	-	294	247	H
4	5.46581	33.61	Pk	34.8	-13.1	55.31	-	-	68.2	-12.89	294	247	H
8	5.46609	21.01	ADV	34.8	-13.1	42.71	-	-	-	-	294	247	H
3	5.46997	31.17	Pk	34.8	-13.2	52.77	-	-	68.2	-15.43	294	247	H
7	5.46997	20.27	ADV	34.8	-13.2	41.87	-	-	-	-	294	247	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

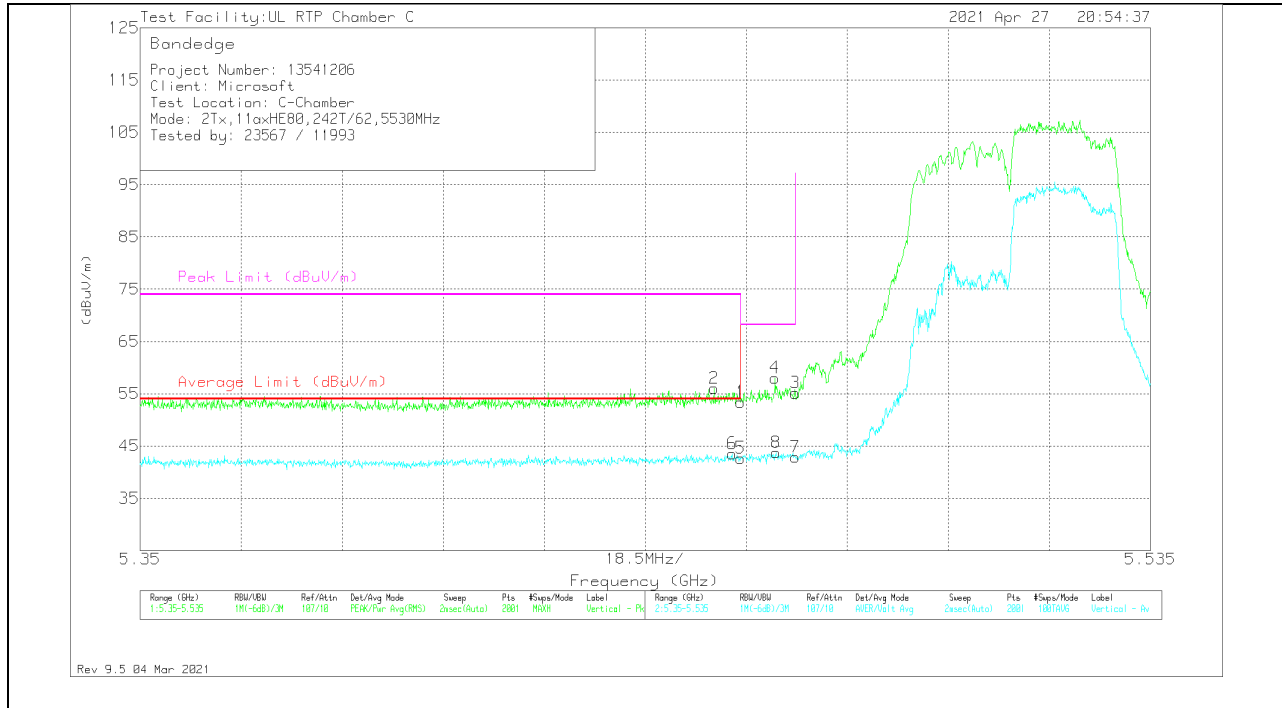

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	31.67	Pk	34.8	-13.1	53.37	-	-	74	-20.63	222	336	V
2	*** 5.45508	34.42	Pk	34.8	-13.2	56.02	-	-	74	-17.98	222	336	V
5	*** 5.45998	20.95	ADV	34.8	-13.1	42.65	54	-11.35	-	-	222	336	V
6	*** 5.45841	21.92	ADV	34.8	-13.2	43.52	54	-10.48	-	-	222	336	V
4	5.46627	36.34	Pk	34.8	-13.1	58.04	-	-	68.2	-10.16	222	336	V
8	5.46646	22.02	ADV	34.8	-13.1	43.72	-	-	-	-	222	336	V
3	5.46997	33.55	Pk	34.8	-13.2	55.15	-	-	68.2	-13.05	222	336	V
7	5.46997	21.29	ADV	34.8	-13.2	42.89	-	-	-	-	222	336	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 106-Tones, RU Index 53

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

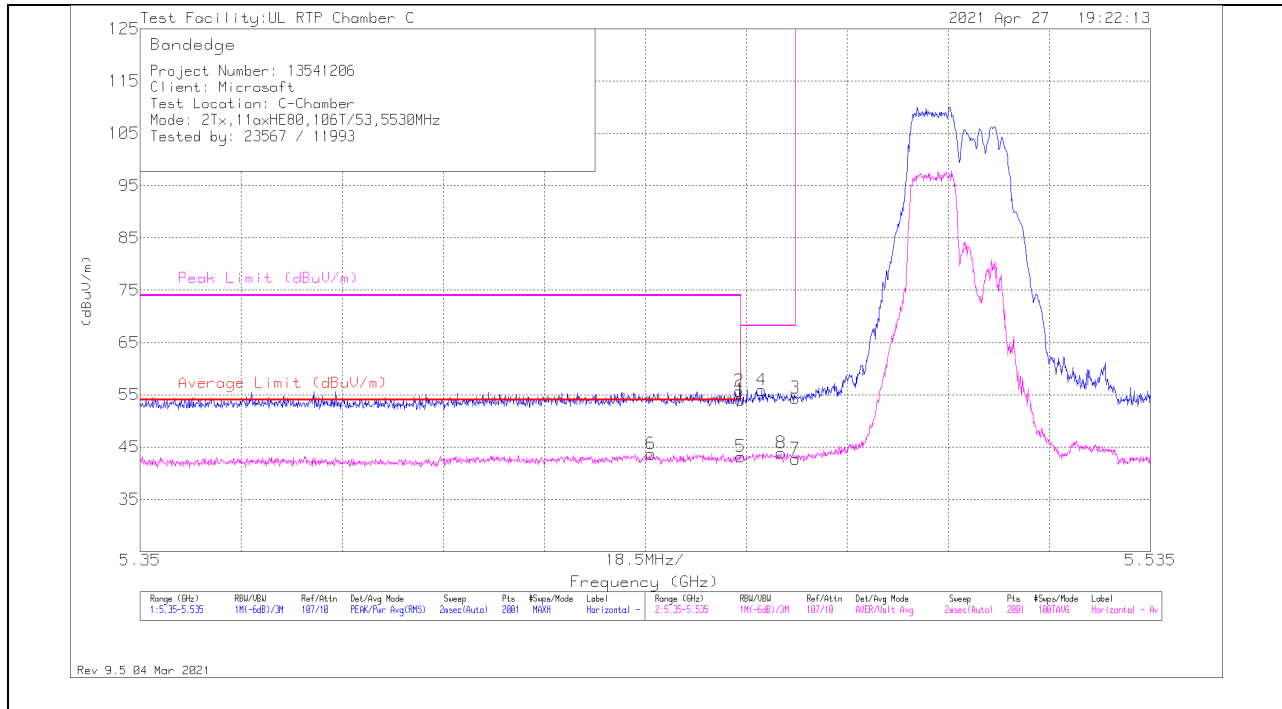

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.32	Pk	34.8	-13.1	54.02	-	-	74	-19.98	214	219	H
2	* ** 5.45971	34.02	Pk	34.8	-13.1	55.72	-	-	74	-18.28	214	219	H
5	* ** 5.45998	21.45	ADV	34.8	-13.1	43.15	54	-10.85	-	-	214	219	H
6	* ** 5.44352	22.09	ADV	34.8	-13.2	43.69	54	-10.31	-	-	214	219	H
4	5.46378	34.19	Pk	34.8	-13.1	55.89	-	-	68.2	-12.31	214	219	H
8	5.46738	22.17	ADV	34.8	-13.1	43.87	-	-	-	-	214	219	H
3	5.46997	32.78	Pk	34.8	-13.2	54.38	-	-	68.2	-13.82	214	219	H
7	5.46997	21.13	ADV	34.8	-13.2	42.73	-	-	-	-	214	219	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

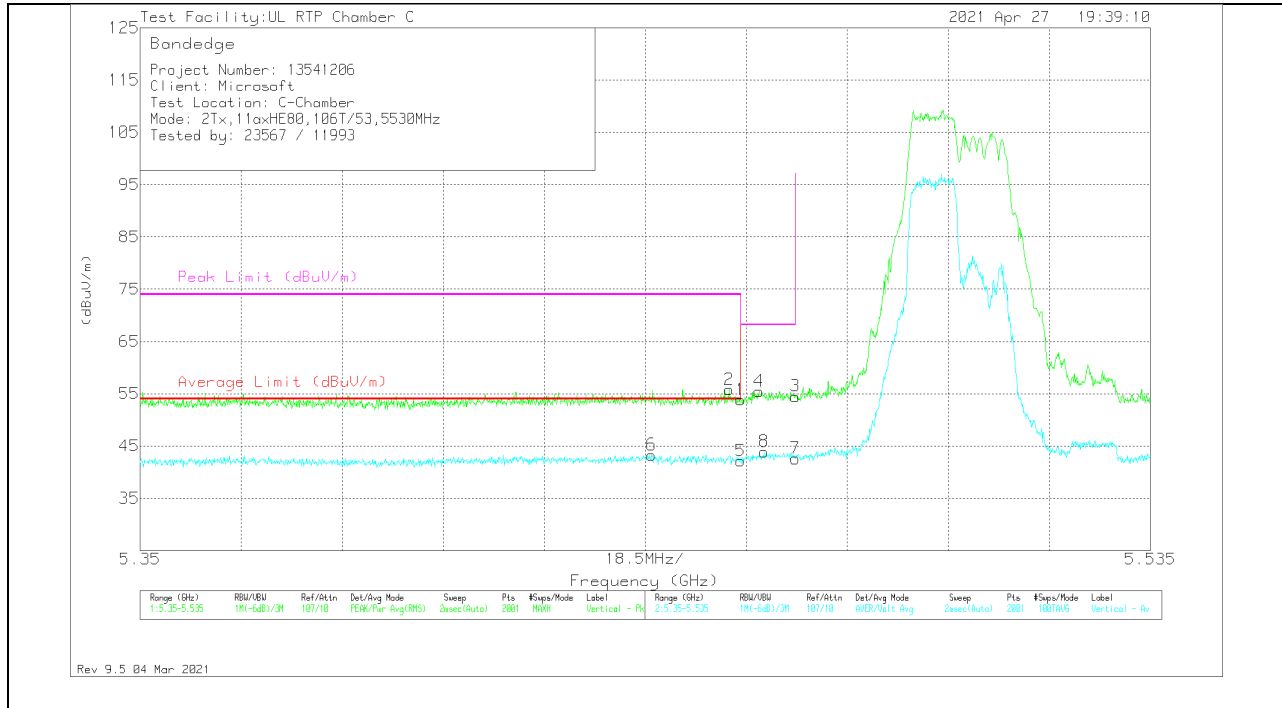

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	32.15	Pk	34.8	-13.1	53.85	-	-	74	-20.15	199	317	V
2	*** 5.45786	34.18	Pk	34.8	-13.2	55.78	-	-	74	-18.22	199	317	V
5	*** 5.45998	20.45	ADV	34.8	-13.1	42.15	54	-11.85	-	-	199	317	V
6	*** 5.44361	21.69	ADV	34.8	-13.2	43.29	54	-10.71	-	-	199	317	V
4	5.46331	33.76	Pk	34.8	-13.1	55.46	-	-	68.2	-12.74	199	317	V
8	5.46424	22.21	ADV	34.8	-13.1	43.91	-	-	-	-	199	317	V
3	5.46997	32.92	Pk	34.8	-13.2	54.52	-	-	68.2	-13.68	199	317	V
7	5.46997	21.01	ADV	34.8	-13.2	42.61	-	-	-	-	199	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 52-Tones, RU Index 37

BANDEGE (LOW CHANNEL)


HORIZONTAL RESULT

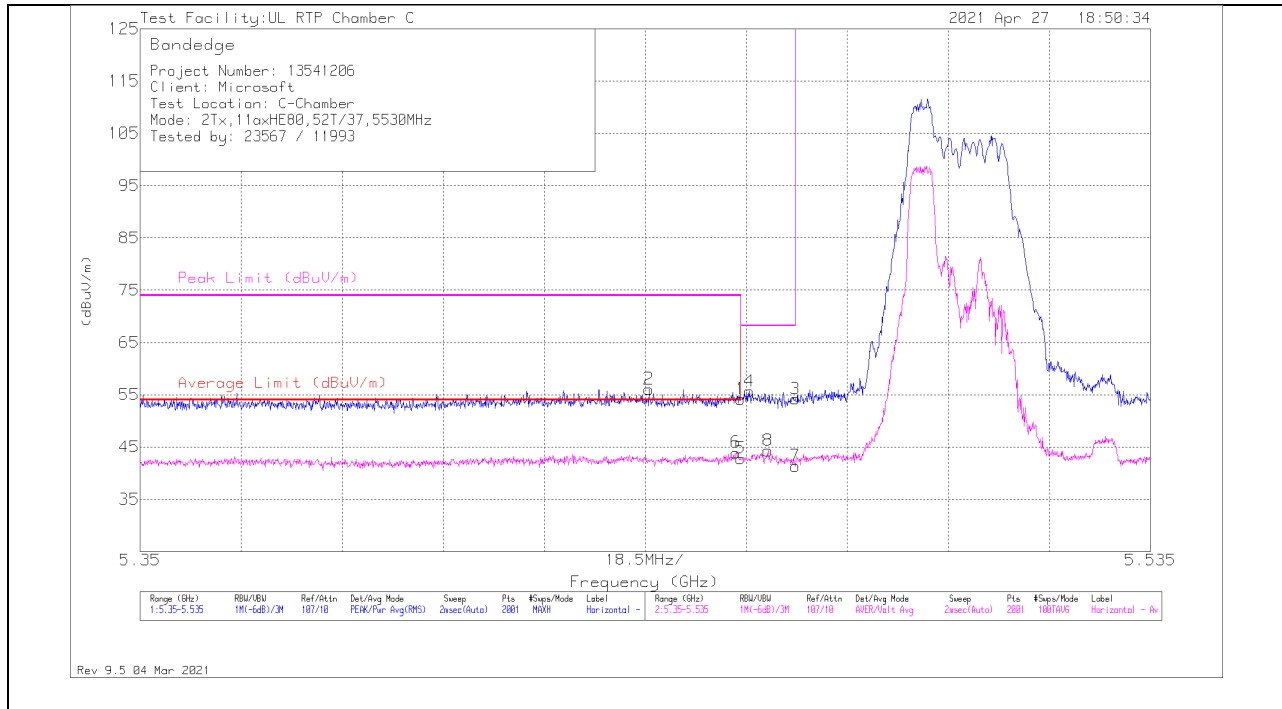

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.48	Pk	34.8	-13.1	54.18	-	-	74	-19.82	191	226	H
2	* ** 5.44315	34.46	Pk	34.8	-13.2	56.06	-	-	74	-17.94	191	226	H
5	* ** 5.45998	21.13	ADV	34.8	-13.1	42.83	54	-11.17	-	-	191	226	H
6	* ** 5.45906	22.22	ADV	34.8	-13.1	43.92	54	-10.08	-	-	191	226	H
4	5.46156	33.97	Pk	34.8	-13.1	55.67	-	-	68.2	-12.53	191	226	H
8	5.46498	22.6	ADV	34.8	-13.1	44.3	-	-	-	-	191	226	H
3	5.46997	32.6	Pk	34.8	-13.2	54.2	-	-	68.2	-14	191	226	H
7	5.46997	19.77	ADV	34.8	-13.2	41.37	-	-	-	-	191	226	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

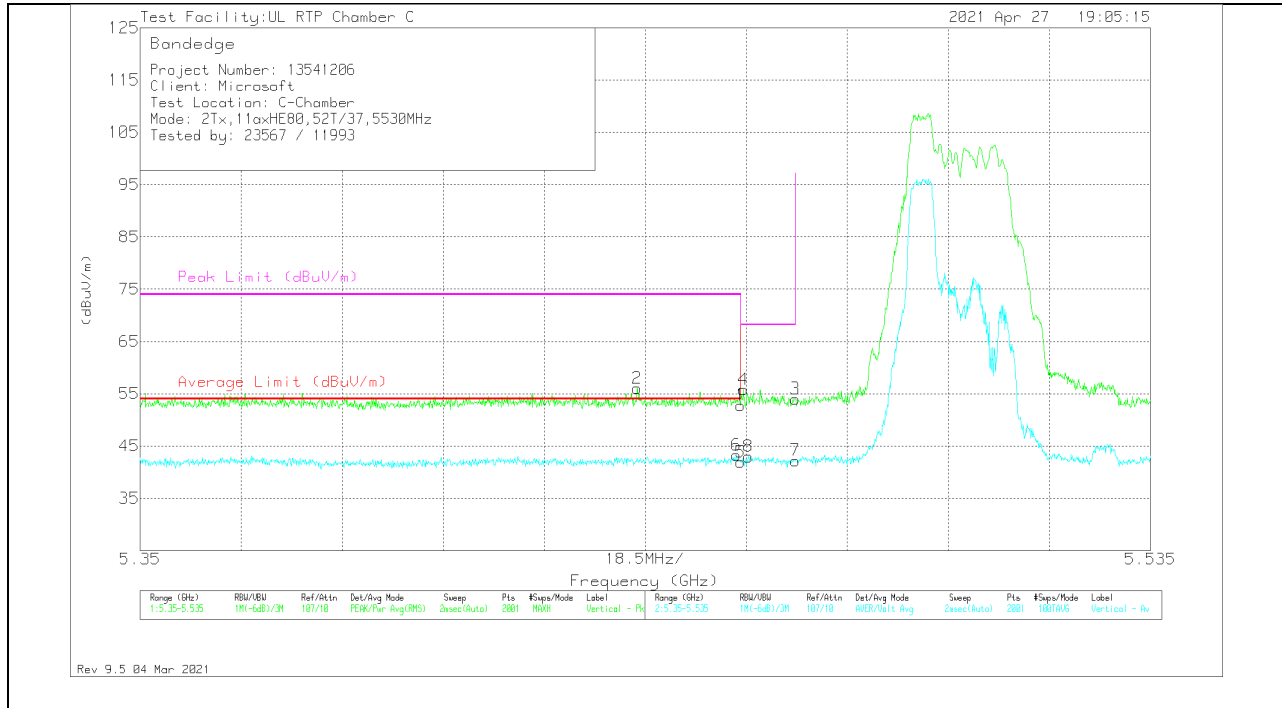

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45998	31.05	Pk	34.8	-13.1	52.75	-	-	74	-21.25	197	220	V
2	** * 5.44102	34.43	Pk	34.8	-13.2	56.03	-	-	74	-17.97	197	220	V
5	** * 5.45998	20.21	ADV	34.8	-13.1	41.91	54	-12.09	-	-	197	220	V
6	** * 5.45915	21.55	ADV	34.8	-13.1	43.25	54	-10.75	-	-	197	220	V
4	5.46045	34.09	Pk	34.8	-13.1	55.79	-	-	68.2	-12.41	197	220	V
8	5.46137	21.26	ADV	34.8	-13.1	42.96	-	-	-	-	197	220	V
3	5.46997	32.38	Pk	34.8	-13.2	53.98	-	-	68.2	-14.22	197	220	V
7	5.46997	20.62	ADV	34.8	-13.2	42.22	-	-	-	-	197	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

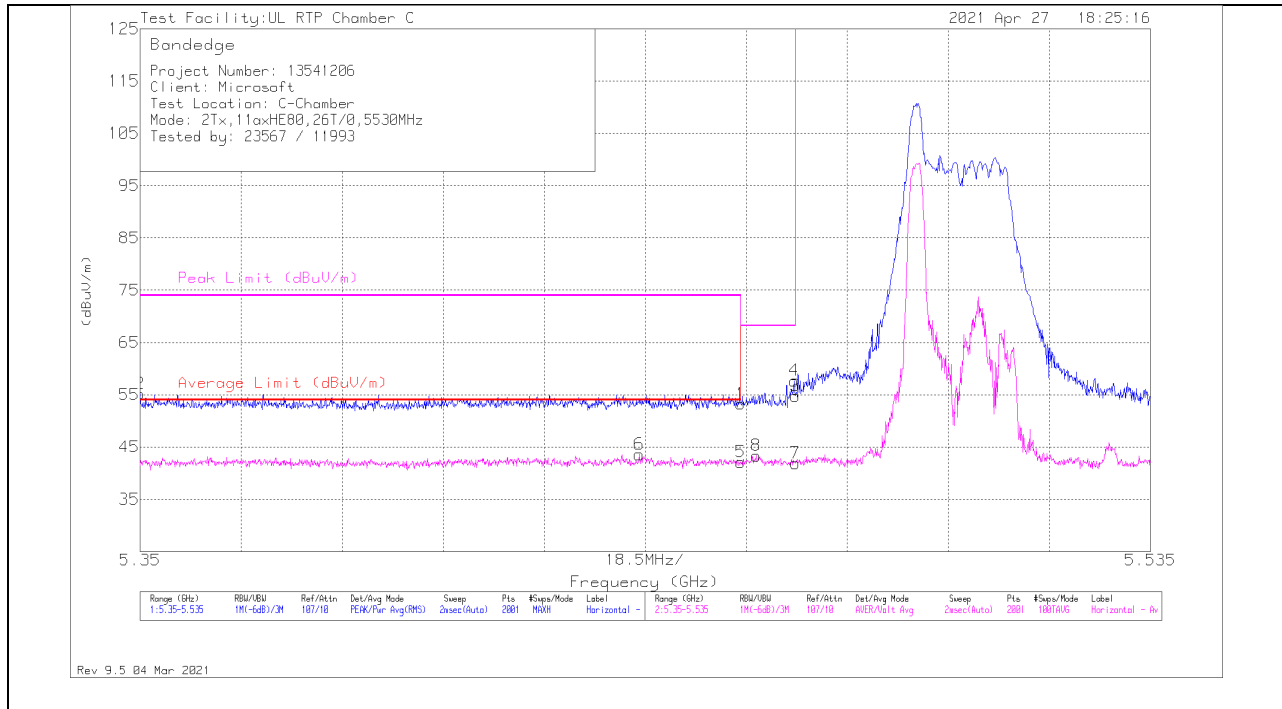

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	31.52	Pk	34.8	-13.1	53.22	-	-	74	-20.78	204	257	H
2	*** 5.35	33.68	Pk	34.7	-13.2	55.18	-	-	74	-18.82	204	257	H
5	*** 5.45998	20.41	ADV	34.8	-13.1	42.11	54	-11.89	-	-	204	257	H
6	*** 5.44139	21.97	ADV	34.8	-13.2	43.57	54	-10.43	-	-	204	257	H
8	5.46285	21.63	ADV	34.8	-13.1	43.33	-	-	-	-	204	257	H
4	5.46979	36.08	Pk	34.8	-13.2	57.68	-	-	68.2	-10.52	204	257	H
3	5.46997	33.18	Pk	34.8	-13.2	54.78	-	-	68.2	-13.42	204	257	H
7	5.46997	20.28	ADV	34.8	-13.2	41.88	-	-	-	-	204	257	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

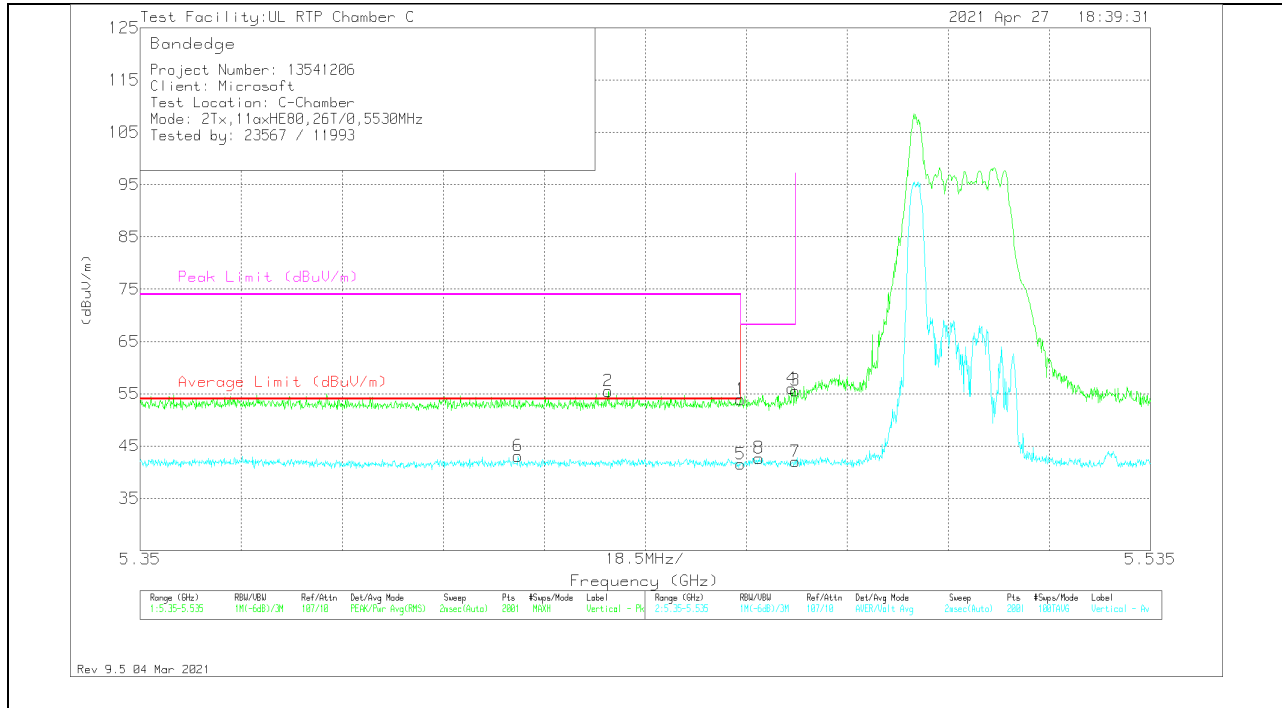

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	32.22	Pk	34.8	-13.1	53.92	-	-	74	-20.08	213	139	V
2	*** 5.43575	34	Pk	34.8	-13.3	55.5	-	-	74	-18.5	213	139	V
5	*** 5.45998	19.83	ADV	34.8	-13.1	41.53	54	-12.47	-	-	213	139	V
6	*** 5.41919	21.68	ADV	34.8	-13.4	43.08	54	-10.92	-	-	213	139	V
8	5.46331	20.97	ADV	34.8	-13.1	42.67	-	-	-	-	213	139	V
4	5.46933	34.43	Pk	34.8	-13.2	56.03	-	-	68.2	-12.17	213	139	V
3	5.46997	34.02	Pk	34.8	-13.2	55.62	-	-	68.2	-12.58	213	139	V
7	5.46997	20.43	ADV	34.8	-13.2	42.03	-	-	-	-	213	139	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW

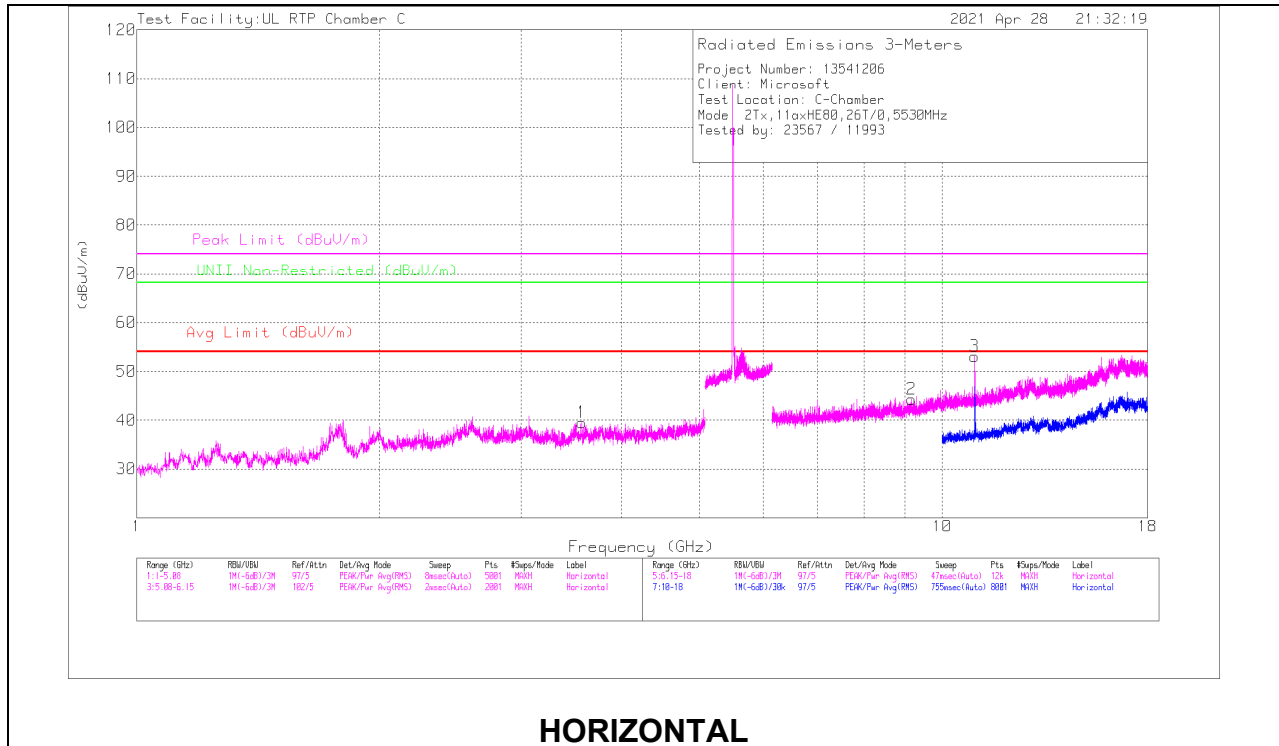

HORIZONTAL

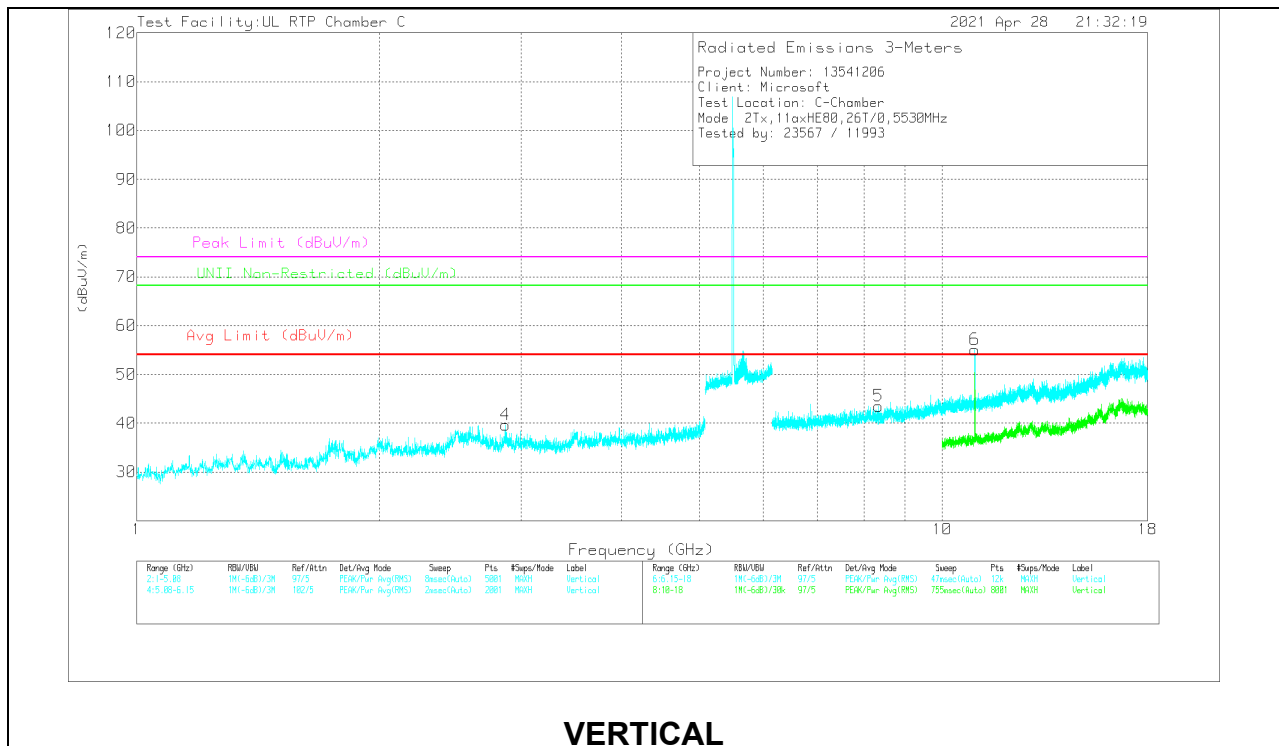

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 10.98504	57.9	PK-U	38	-39.4	56.5	-	-	74	-17.5	-	-	19	101	H
	* ** 10.98381	45.76	ADV	38	-39.5	44.26	54	-9.74	-	-	-	-	19	101	H
6	* ** 10.98449	29.94	PK-U	38	-39.4	28.54	-	-	74	-45.46	-	-	297	231	V
	* ** 10.98594	17.12	ADV	38	-39.3	15.82	54	-38.18	-	-	-	-	297	231	V
1	* ** 3.57203	54.35	Pk	33.2	-48.1	39.45	54	-14.55	74	-34.55	-	-	0-360	101	H
4	* ** 2.86864	56.6	Pk	32.5	-49.4	39.7	54	-14.3	74	-34.3	-	-	0-360	199	V
2	* ** 9.16978	49.81	Pk	36.4	-41.9	44.31	54	-9.69	74	-29.69	-	-	0-360	101	H
5	* ** 8.34225	50.05	Pk	36	-42.5	43.55	54	-10.45	74	-30.45	-	-	0-360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

HIGH

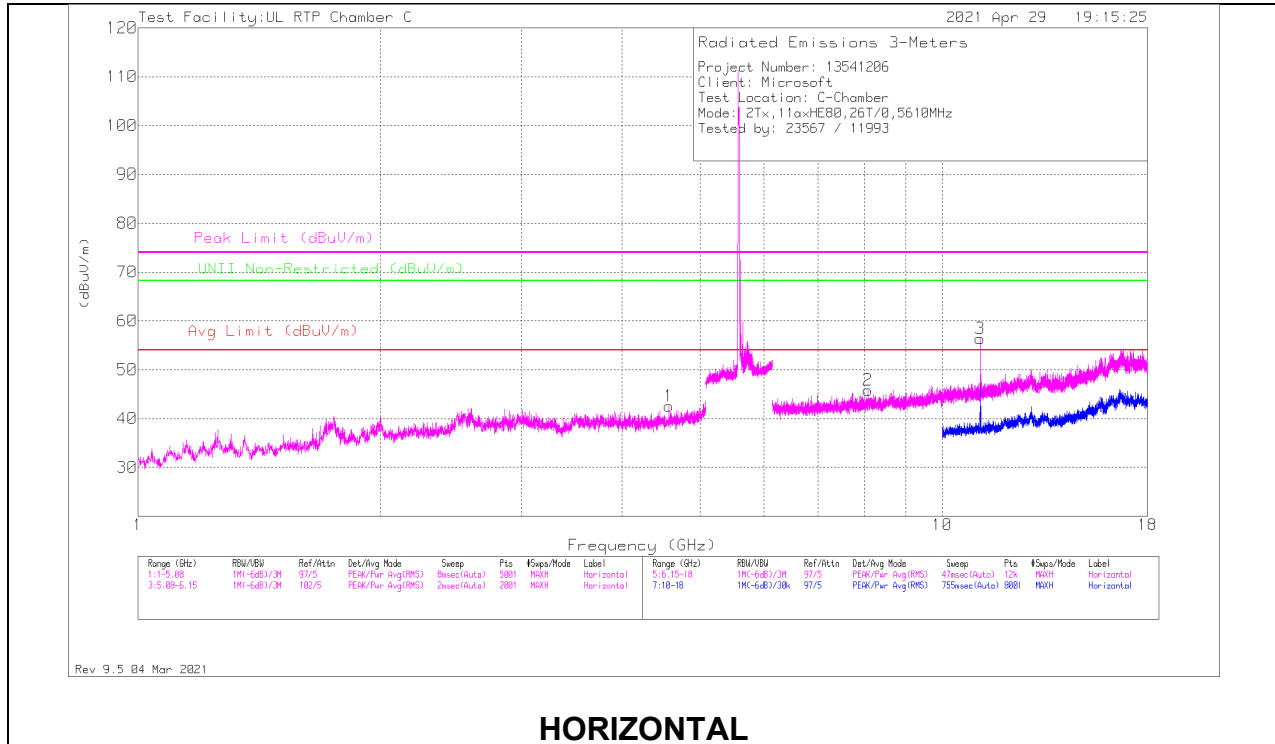

HORIZONTAL

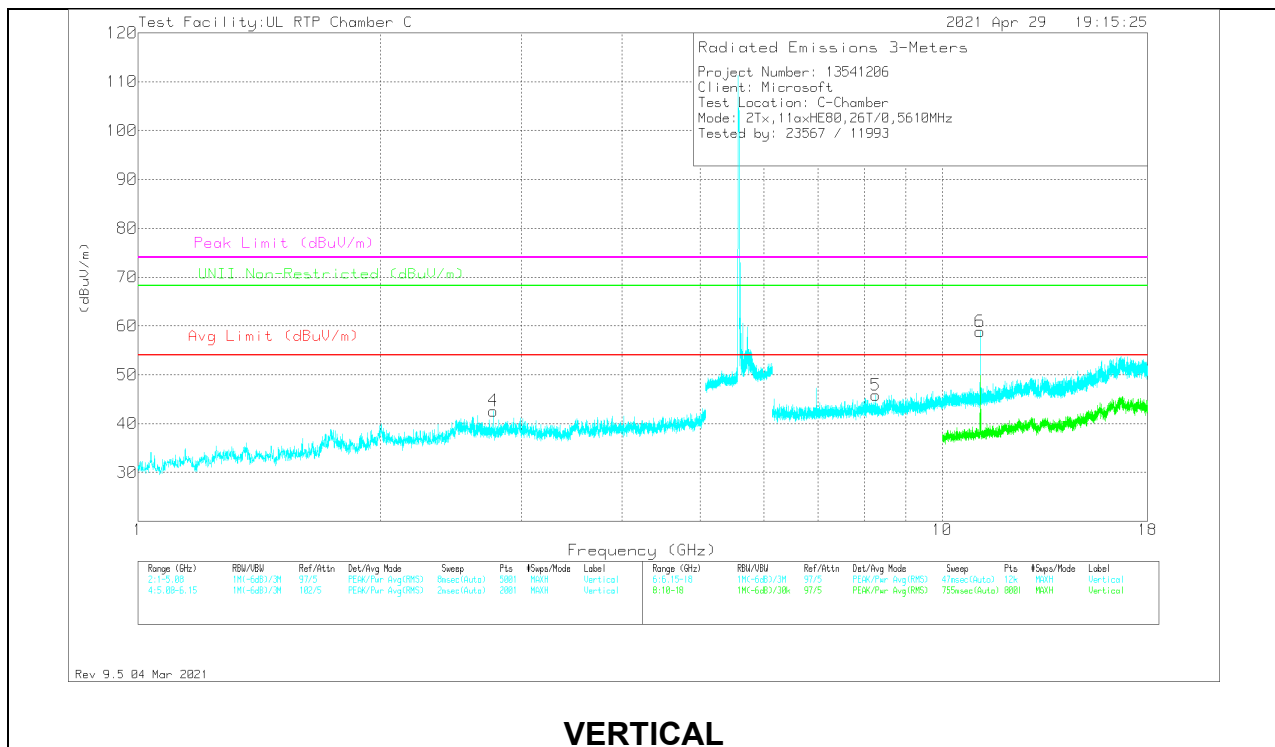

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.14431	60.52	PK-U	38.1	-40.3	58.32	-	-	74	-15.68	-	-	194	101	H
	* ** 11.14382	49.06	ADV	38.1	-40.3	46.86	54	-7.14	-	-	-	-	194	101	H
6	* ** 11.14541	63.75	PK-U	38.1	-40.3	61.55	-	-	74	-12.45	-	-	167	235	V
	* ** 11.14387	52.32	ADV	38.1	-40.3	50.12	54	-3.88	-	-	-	-	167	235	V
1	* ** 4.57326	55.24	Pk	34.2	-46.9	42.54	54	-11.46	74	-31.46	-	-	0-360	101	H
4	* ** 2.76664	60.3	Pk	32.4	-50.1	42.6	54	-11.4	74	-31.4	-	-	0-360	101	V
2	* ** 8.07958	52.39	Pk	36	-42.6	45.79	54	-8.21	74	-28.21	-	-	0-360	101	H
5	* ** 8.26128	51.98	Pk	36	-42.2	45.78	54	-8.22	74	-28.22	-	-	0-360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

CHANNEL 138

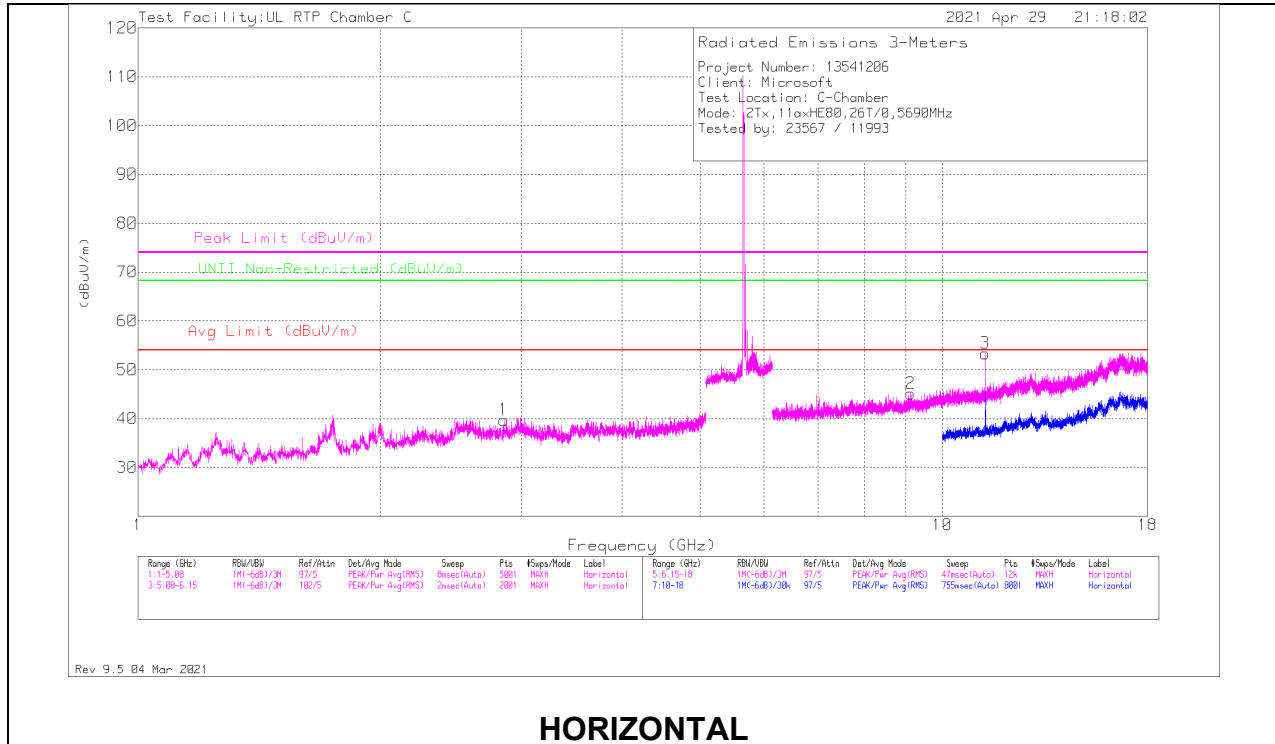

HORIZONTAL

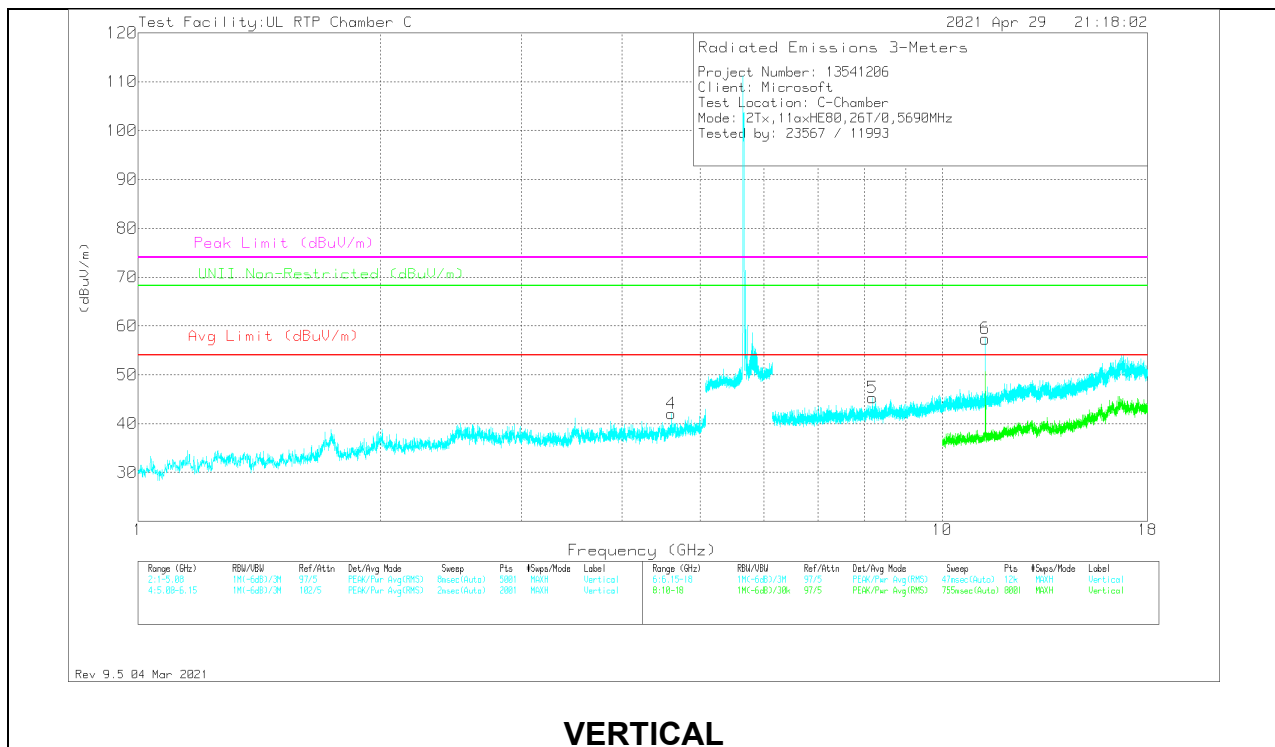

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.30528	58.56	PK-U	38.2	-39.6	57.16	-	-	74	-16.84	-	-	132	225	H
	* ** 11.30409	46.55	ADV	38.2	-39.5	45.25	54	-8.75	-	-	-	-	132	225	H
6	* ** 11.30521	62.32	PK-U	38.2	-39.6	60.92	-	-	74	-13.08	-	-	164	198	V
	* ** 11.30416	50.5	ADV	38.2	-39.5	49.2	54	-4.8	-	-	-	-	164	198	V
1	* ** 2.84987	56.93	PK	32.5	-49.7	39.73	54	-14.27	74	-34.27	-	-	0-360	200	H
4	* ** 4.60264	53.53	PK	34.3	-45.8	42.03	54	-11.97	74	-31.97	-	-	0-360	200	V
2	* ** 9.13719	51.01	PK	36.4	-42.3	45.11	54	-8.89	74	-28.89	-	-	0-360	101	H
5	* ** 8.18721	52.69	PK	36	-43.4	45.29	54	-8.71	74	-28.71	-	-	0-360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

PK - Peak detector


2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 18

HARMONICS AND SPURIOUS EMISSIONS

LOW

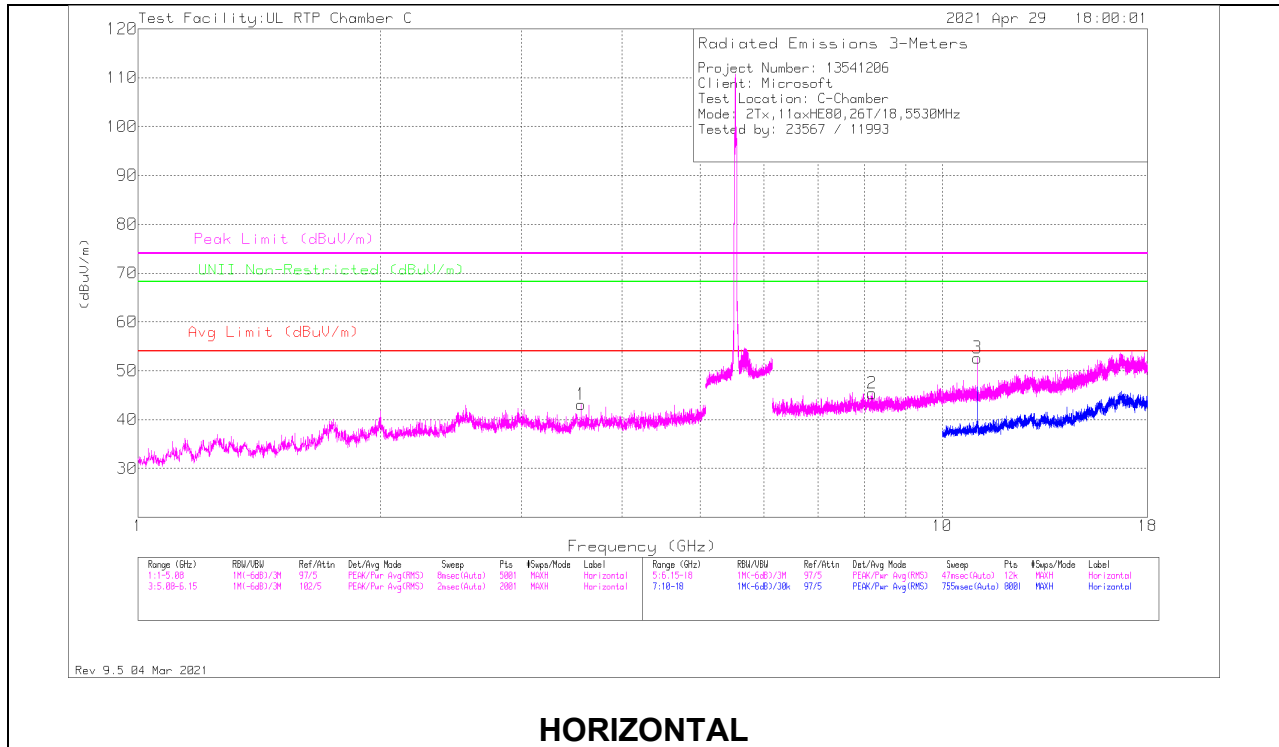

HORIZONTAL

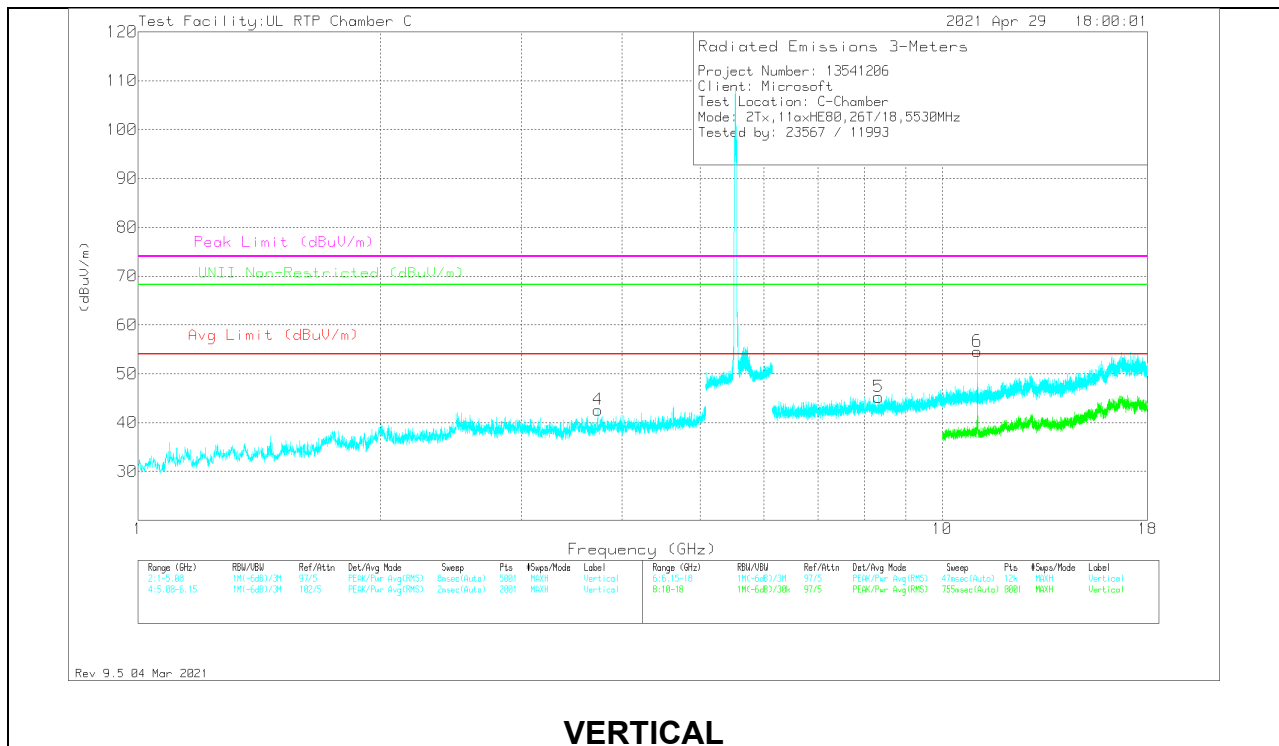

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	*** 11.05827	59.16	PK-U	38.1	-39.5	57.76	-	-	74	-16.24	-	-	133	230	H
	*** 11.0601	48.55	ADV	38.1	-39.5	47.15	54	-6.85	-	-	-	-	133	230	H
6	*** 11.06161	61.48	PK-U	38.1	-39.5	60.08	-	-	74	-13.92	-	-	151	245	V
	*** 11.06001	50.42	ADV	38.1	-39.5	49.02	54	-4.98	-	-	-	-	151	245	V
1	*** 3.55653	58.38	Pk	33.2	-48.5	43.08	54	-10.92	74	-30.92	-	-	0-360	199	H
4	*** 3.73034	56.92	Pk	33.4	-47.7	42.62	54	-11.38	74	-31.38	-	-	0-360	199	V
2	*** 8.17833	52.88	Pk	36	-43.5	45.38	54	-8.62	74	-28.62	-	-	0-360	200	H
5	*** 8.33139	52.04	Pk	36	-42.8	45.24	54	-8.76	74	-28.76	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

HIGH

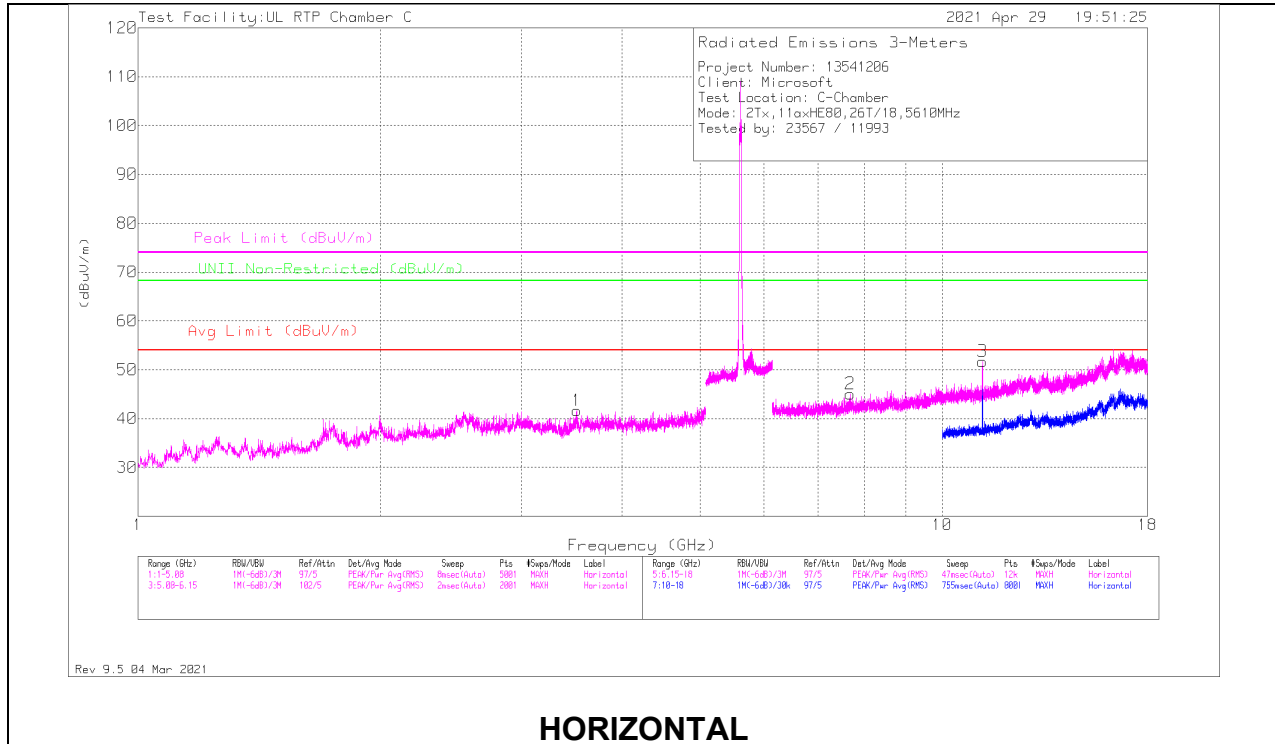

HORIZONTAL

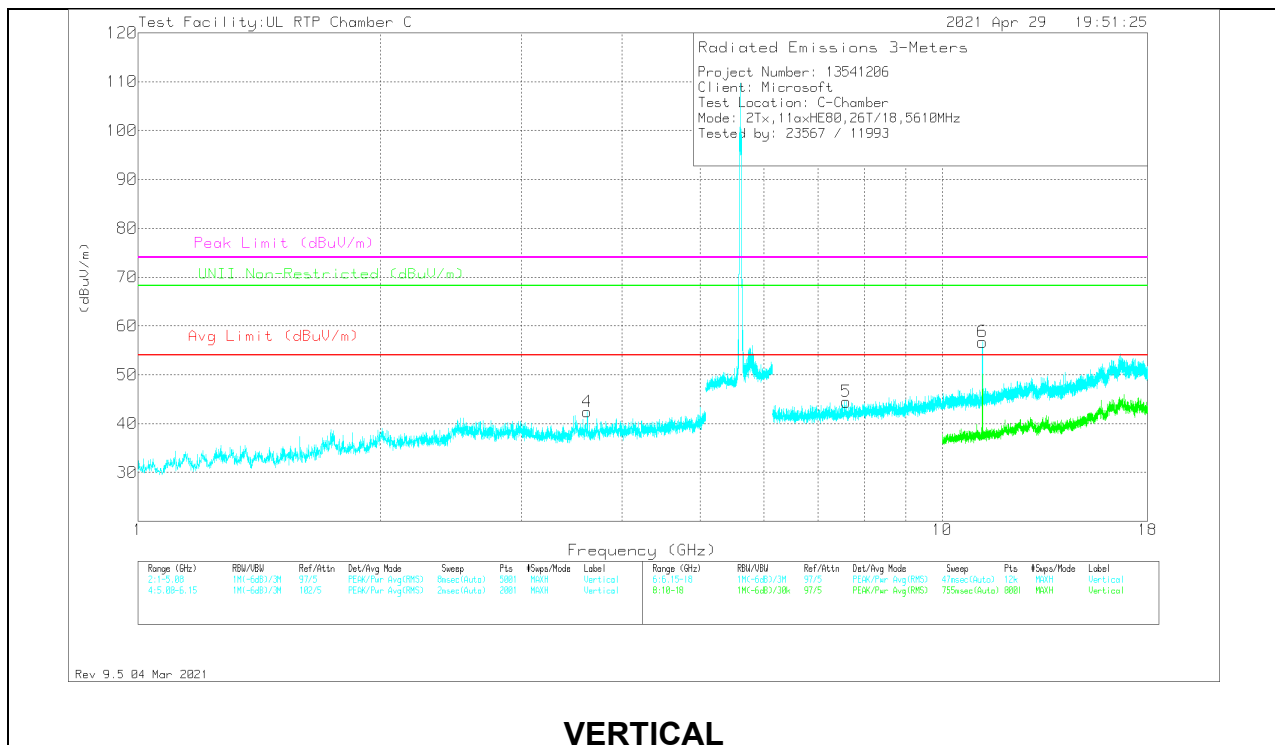

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.21881	57.39	PK-U	38.2	-39.2	56.39	-	-	74	-17.61	-	-	135	195	H
	* ** 11.22027	45.87	ADV	38.2	-39.2	44.87	54	-9.13	-	-	-	-	135	195	H
6	* ** 11.2219	31.12	PK-U	38.2	-39.2	30.12	-	-	74	-43.88	-	-	150	280	V
	* ** 11.22114	18.27	ADV	38.2	-39.1	17.37	54	-36.63	-	-	-	-	150	280	V
1	* ** 3.51083	55.83	Pk	34.1	-48.3	41.63	54	-12.37	74	-32.37	-	-	0-360	200	H
4	* ** 3.61528	57.29	Pk	33.2	-48.1	42.39	54	-11.61	74	-31.61	-	-	0-360	200	V
2	* ** 7.68359	52.04	Pk	35.9	-42.9	45.04	54	-8.96	74	-28.96	-	-	0-360	101	H
5	* ** 7.5957	52.87	Pk	35.9	-44.3	44.47	54	-9.53	74	-29.53	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

CHANNEL 138

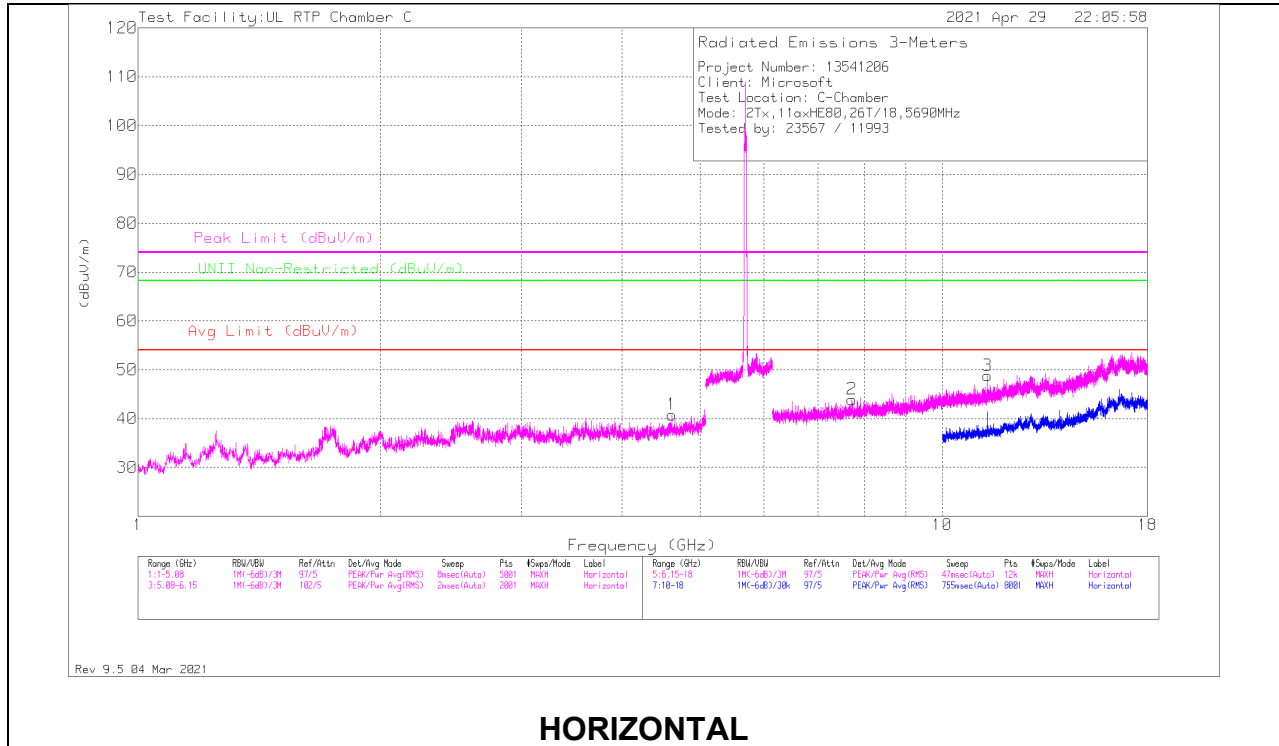

HORIZONTAL

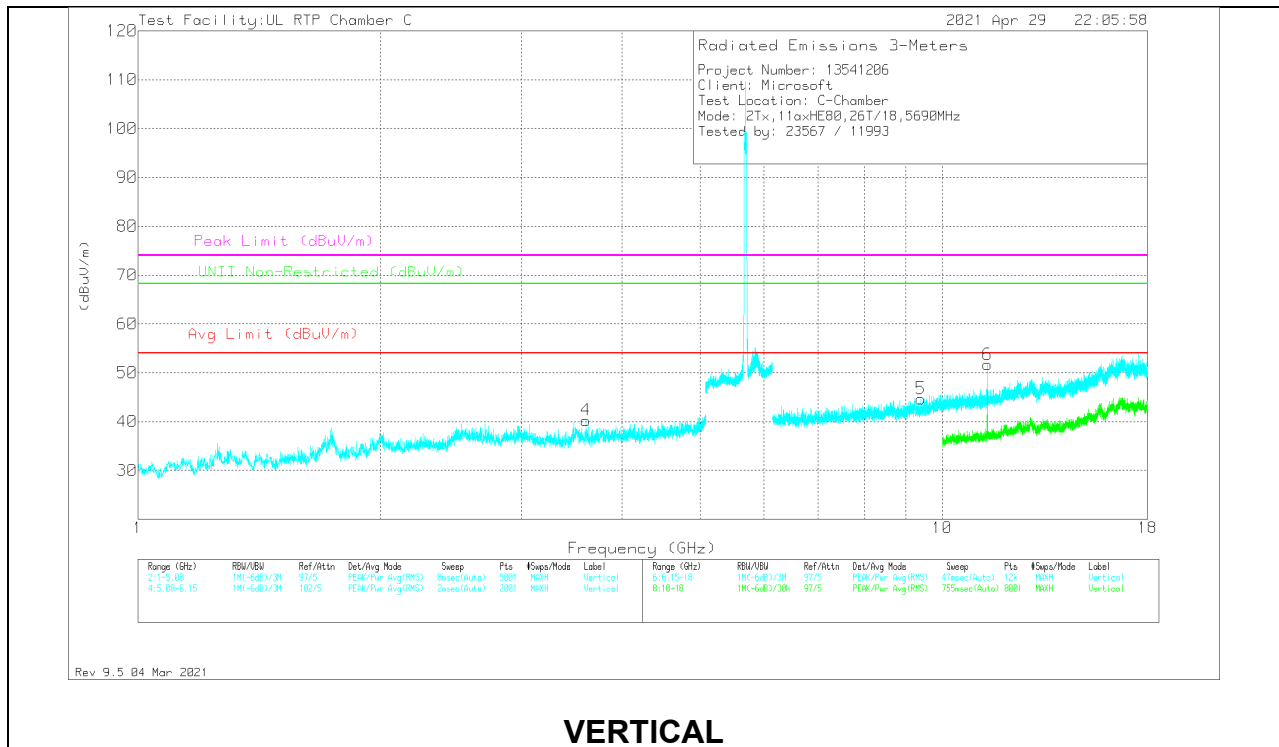

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.37845	54.23	PK-U	38.3	-39.1	53.43	-	-	74	-20.57	-	-	202	230	H
	* ** 11.37978	42.17	ADV	38.3	-39.1	41.37	54	-12.63	-	-	-	-	202	230	H
6	* ** 11.37791	57.31	PK-U	38.3	-39.1	56.51	-	-	74	-17.49	-	-	162	241	V
	* ** 11.37993	46.35	ADV	38.3	-39.1	45.55	54	-8.45	-	-	-	-	162	241	V
1	* ** 4.60998	52.69	Pk	34.3	-46.2	40.79	54	-13.21	74	-33.21	-	-	0-360	101	H
4	* ** 3.6063	55.07	Pk	33.2	-48	40.27	54	-13.73	74	-33.73	-	-	0-360	200	V
2	* ** 7.72111	50.81	Pk	35.9	-42.8	43.91	54	-10.09	74	-30.09	-	-	0-360	101	H
5	* ** 9.40579	49.65	Pk	36.7	-41.7	44.65	54	-9.35	74	-29.35	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector


2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 36

HARMONICS AND SPURIOUS EMISSIONS

LOW

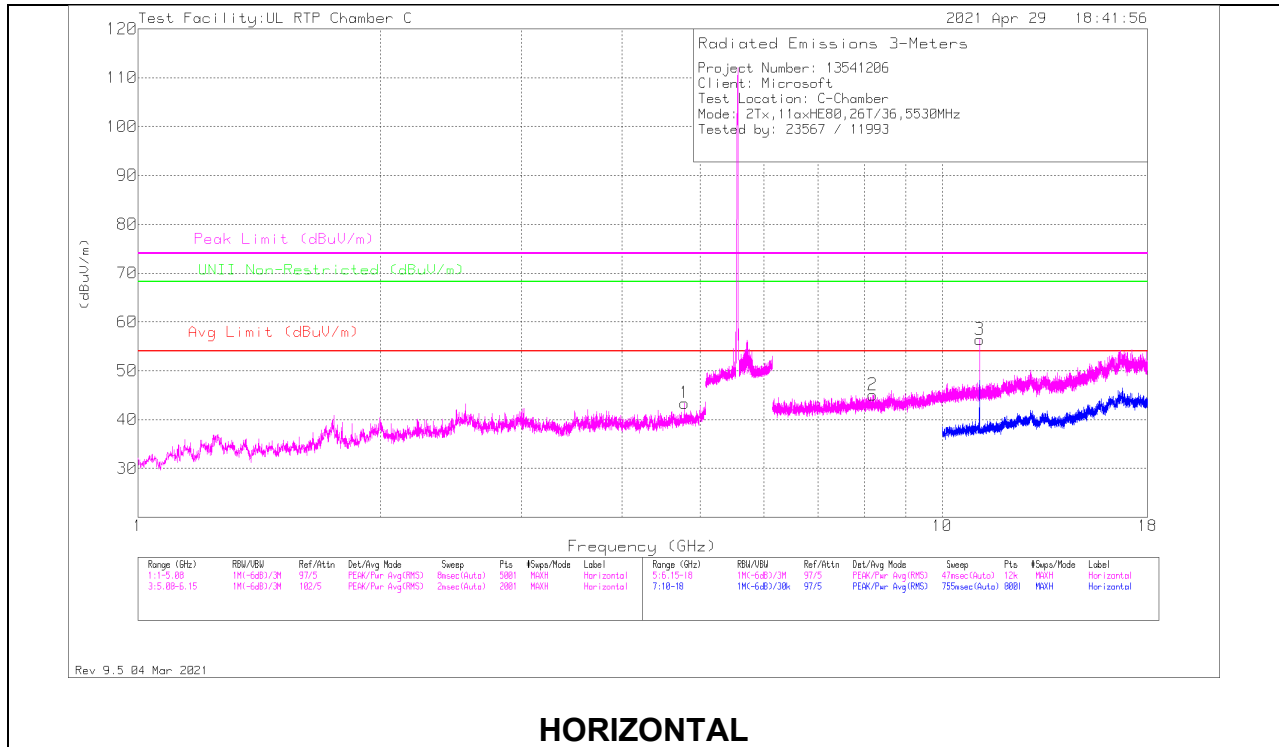

HORIZONTAL

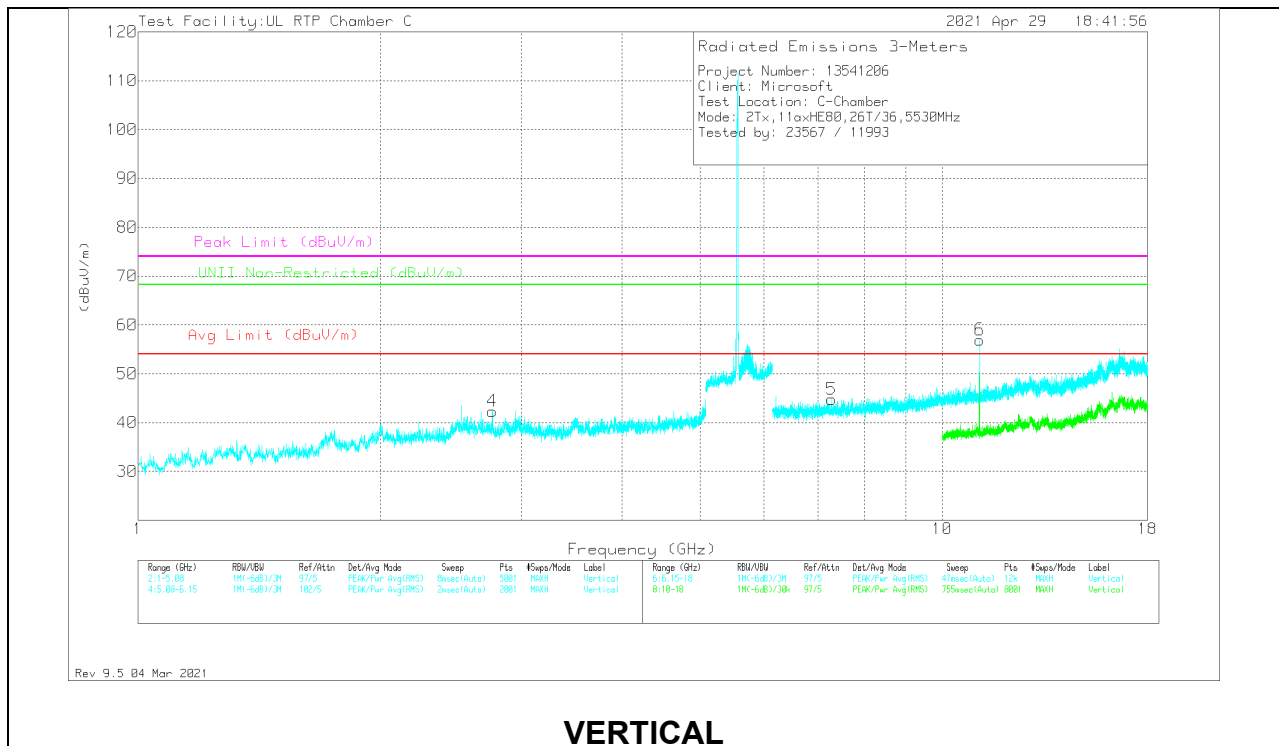

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.13477	62.75	PK-U	38.1	-40.5	60.35	-	-	74	-13.65	-	-	133	223	H
	* ** 11.13621	50.46	ADV	38.1	-40.5	48.06	54	-5.94	-	-	-	-	133	223	H
6	* ** 11.13476	64.57	PK-U	38.1	-40.5	62.17	-	-	74	-11.83	-	-	144	343	V
	* ** 11.13628	52.77	ADV	38.1	-40.5	50.37	54	-3.63	-	-	-	-	144	343	V
1	* ** 4.78134	56.2	Pk	34.3	-47.1	43.4	54	-10.6	74	-30.6	-	-	0-360	101	H
4	* ** 2.75766	60.02	Pk	32.4	-50.1	42.32	54	-11.68	74	-31.68	-	-	0-360	200	V
2	* ** 8.19709	52.18	Pk	36	-43.1	45.08	54	-8.92	74	-28.92	-	-	0-360	101	H
5	* ** 7.28365	52.84	Pk	35.9	-44	44.74	54	-9.26	74	-29.26	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

HIGH

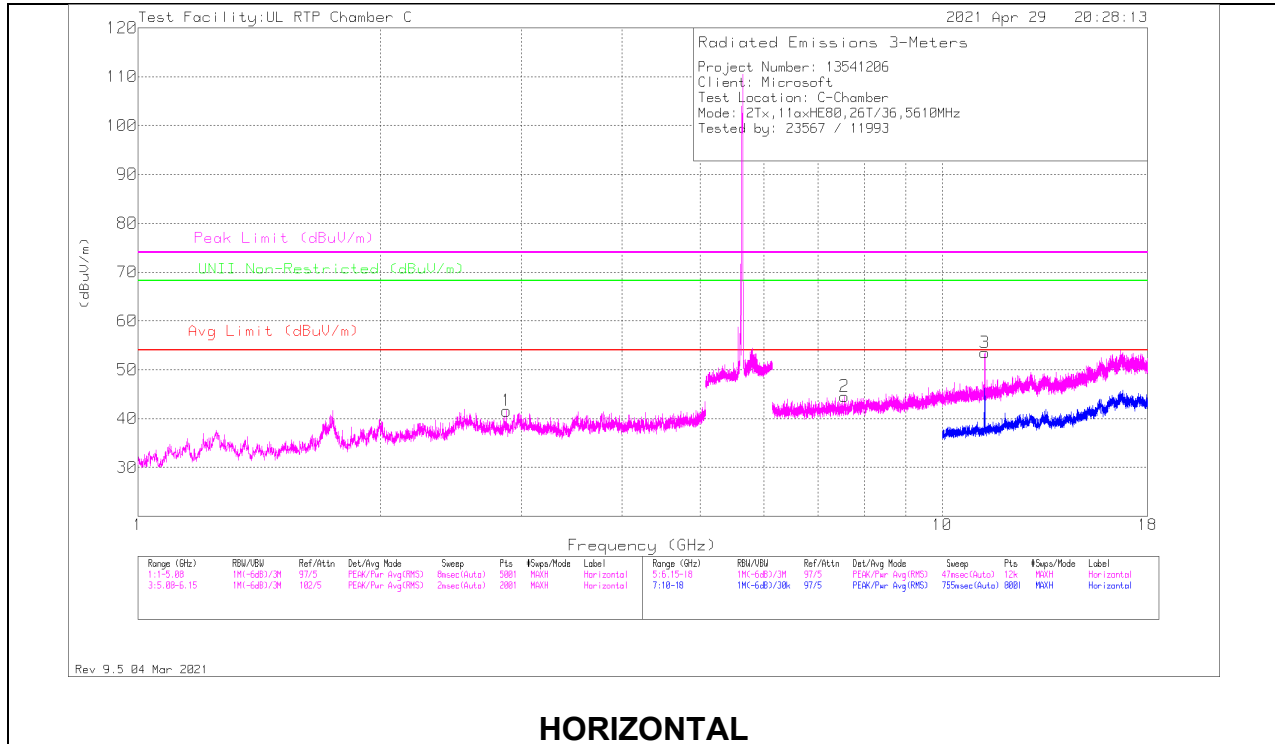

HORIZONTAL

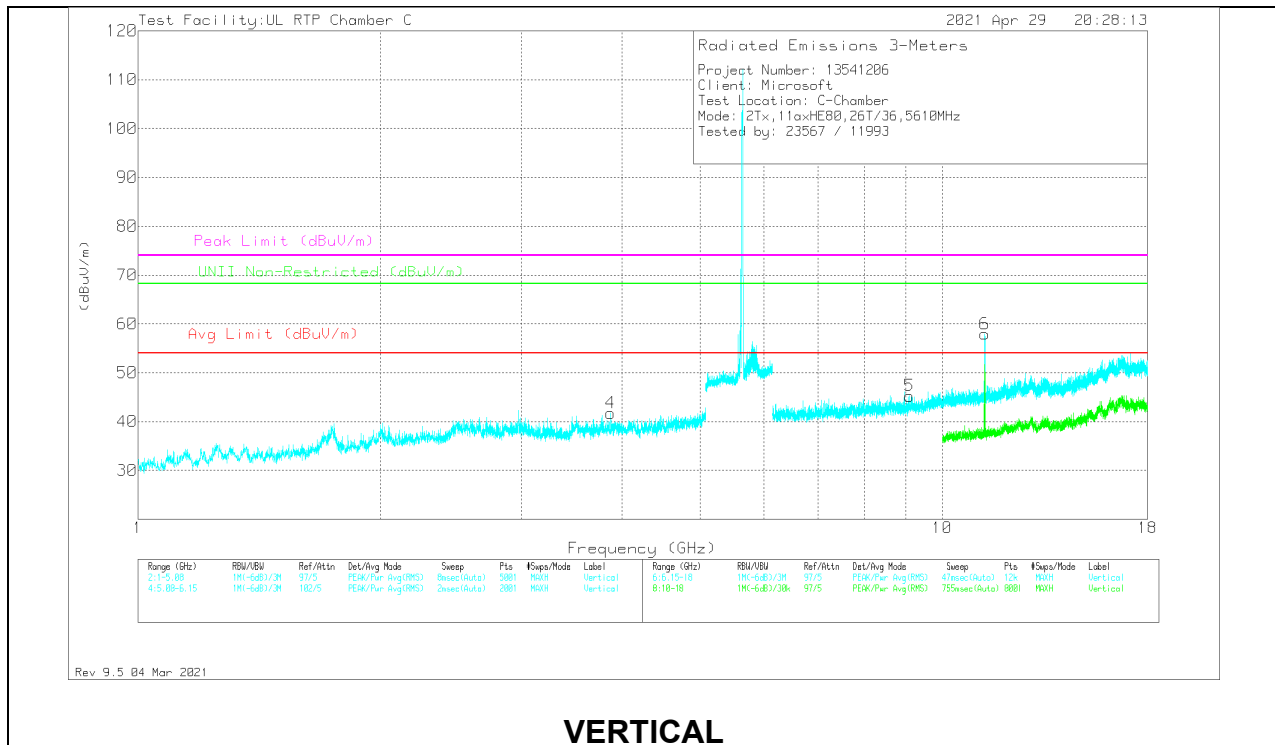

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.29541	59.77	PK-U	38.2	-39.2	58.77	-	-	74	-15.23	-	-	135	226	H
	* ** 11.29609	47.34	ADV	38.2	-39.2	46.34	54	-7.66	-	-	-	-	135	226	H
6	* ** 11.29491	62.93	PK-U	38.2	-39.2	61.93	-	-	74	-12.07	-	-	161	210	V
	* ** 11.29566	50.61	ADV	38.2	-39.1	49.71	54	-4.29	-	-	-	-	161	210	V
1	* ** 2.87109	58.5	Pk	32.5	-49.4	41.6	54	-12.4	74	-32.4	-	-	0-360	200	H
4	* ** 3.86661	56.92	Pk	33.5	-48.7	41.72	54	-12.28	74	-32.28	-	-	0-360	101	V
2	* ** 7.5562	51.92	Pk	35.9	-43.3	44.52	54	-9.48	74	-29.48	-	-	0-360	200	H
5	* ** 9.1046	51.45	Pk	36.4	-42.6	45.25	54	-8.75	74	-28.75	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector

CHANNEL 138

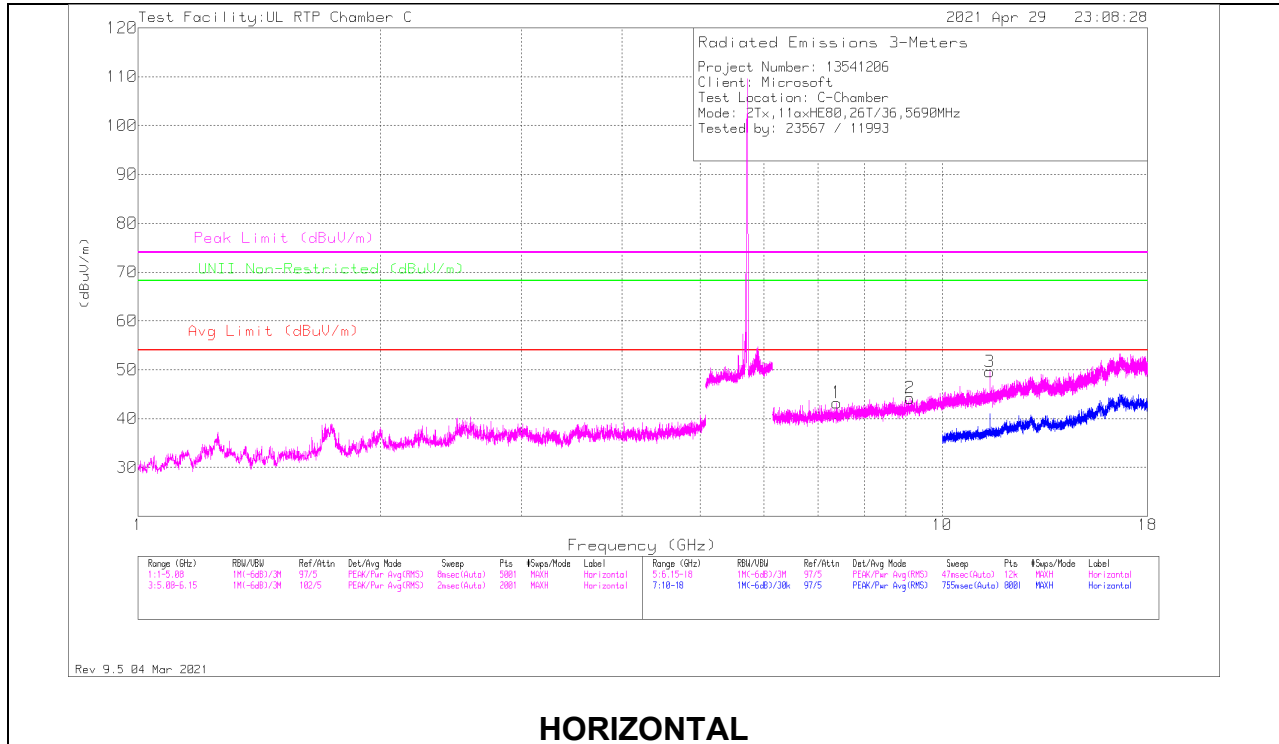

HORIZONTAL

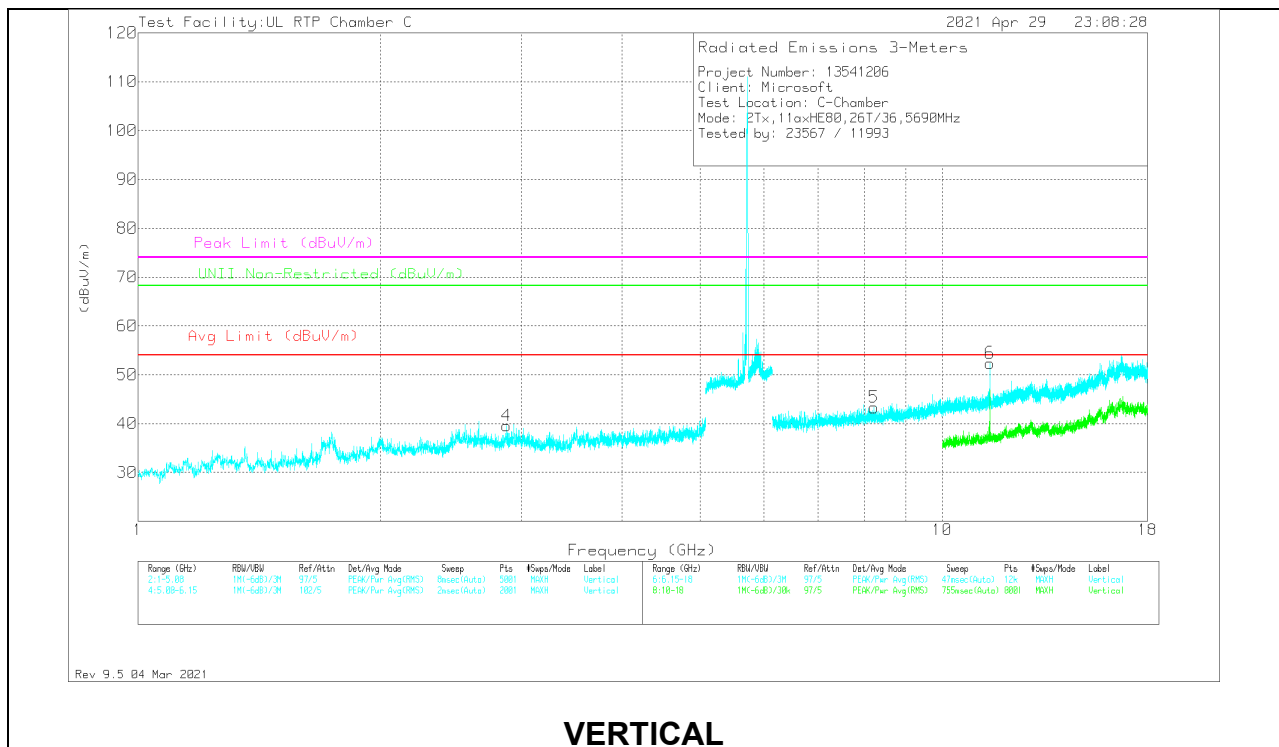

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.45476	53.75	PK-U	38.4	-39.6	52.55	-	-	74	-21.45	-	-	209	237	H
	* ** 11.45584	41.64	ADV	38.4	-39.6	40.44	54	-13.56	-	-	-	-	209	237	H
6	* ** 11.45512	58.15	PK-U	38.4	-39.5	57.05	-	-	74	-16.95	-	-	163	196	V
	* ** 11.45612	46.56	ADV	38.4	-39.6	45.36	54	-8.64	-	-	-	-	163	196	V
4	* ** 2.87354	56.53	Pk	32.5	-49.5	39.53	54	-14.47	74	-34.47	-	-	0-360	101	V
1	* ** 7.39524	51.73	Pk	35.9	-44.4	43.23	54	-10.77	74	-30.77	-	-	0-360	101	H
2	* ** 9.11448	50.59	Pk	36.4	-42.8	44.19	54	-9.81	74	-29.81	-	-	0-360	200	H
5	* ** 8.22671	49.78	Pk	36	-42.5	43.28	54	-10.72	74	-30.72	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

Pk - Peak detector


2TX Antenna 1 + Antenna 2 OFDMA MODE: 242-Tones, RU Index 64

HARMONICS AND SPURIOUS EMISSIONS

LOW

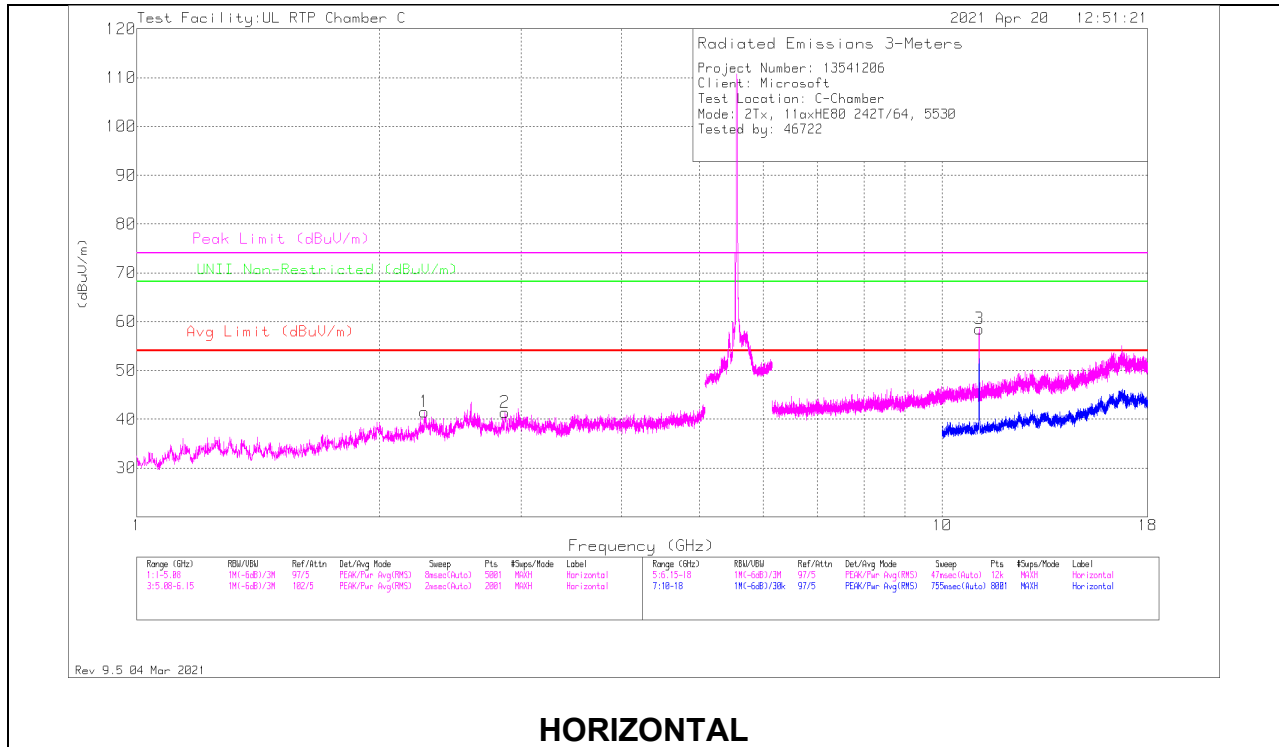

HORIZONTAL

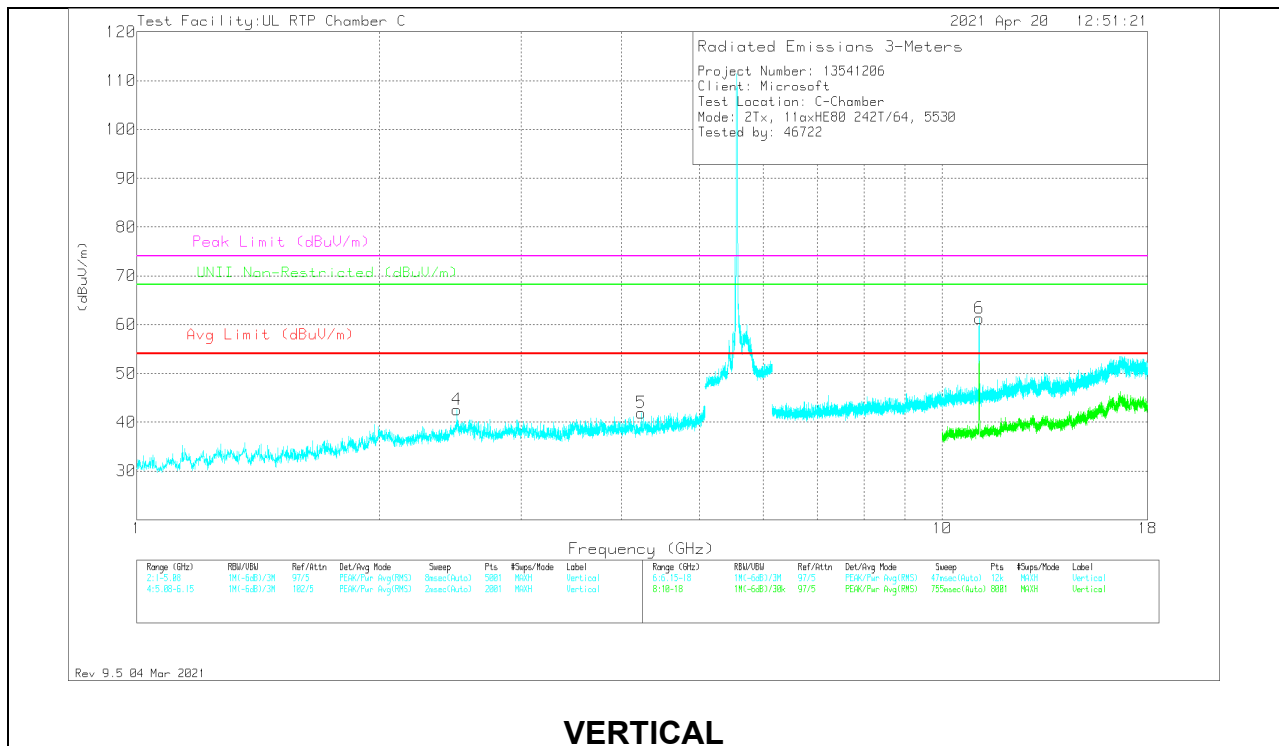

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.27622	60.75	Pk	31.8	-51	41.55	54	-12.45	74	-32.45	-	-	0-360	200	H
2	*** 2.86538	58.27	Pk	32.5	-49.4	41.37	54	-12.63	74	-32.63	-	-	0-360	101	H
4	*** 2.49736	60.29	Pk	32.7	-50.4	42.59	54	-11.41	74	-31.41	-	-	0-360	200	V
5	*** 4.23381	55.63	Pk	33.5	-47.2	41.93	54	-12.07	74	-32.07	-	-	0-360	101	V
3	*** 11.11862	64.12	PK-U	38.1	-40.2	62.02	-	-	74	-11.98	-	-	259	101	H
	*** 11.12006	50.9	ADV	38.1	-40.3	48.7	54	-5.3	-	-	-	-	259	101	H
6	*** 11.12699	68.05	PK-U	38.1	-40.5	65.65	-	-	74	-8.35	-	-	146	292	V
	*** 11.11885	54.77	ADV	38.1	-40.3	52.57	54	-1.43	-	-	-	-	146	292	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

HIGH

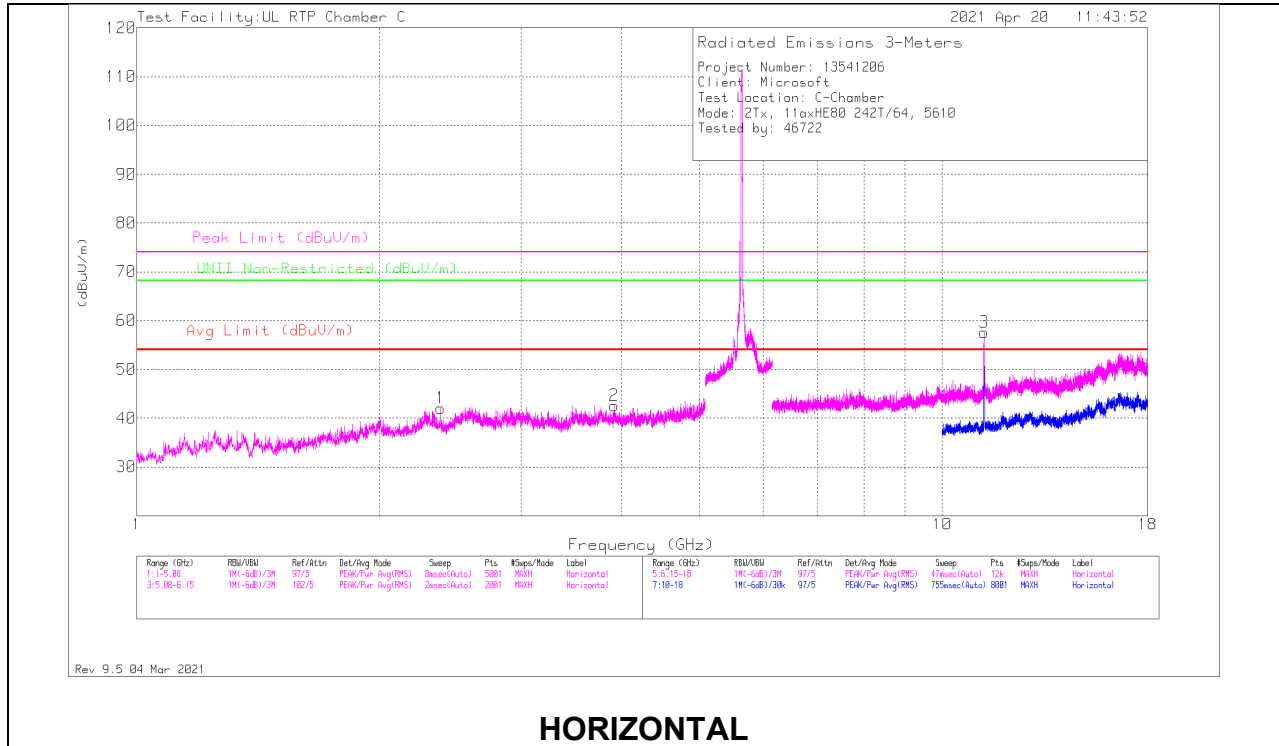

HORIZONTAL

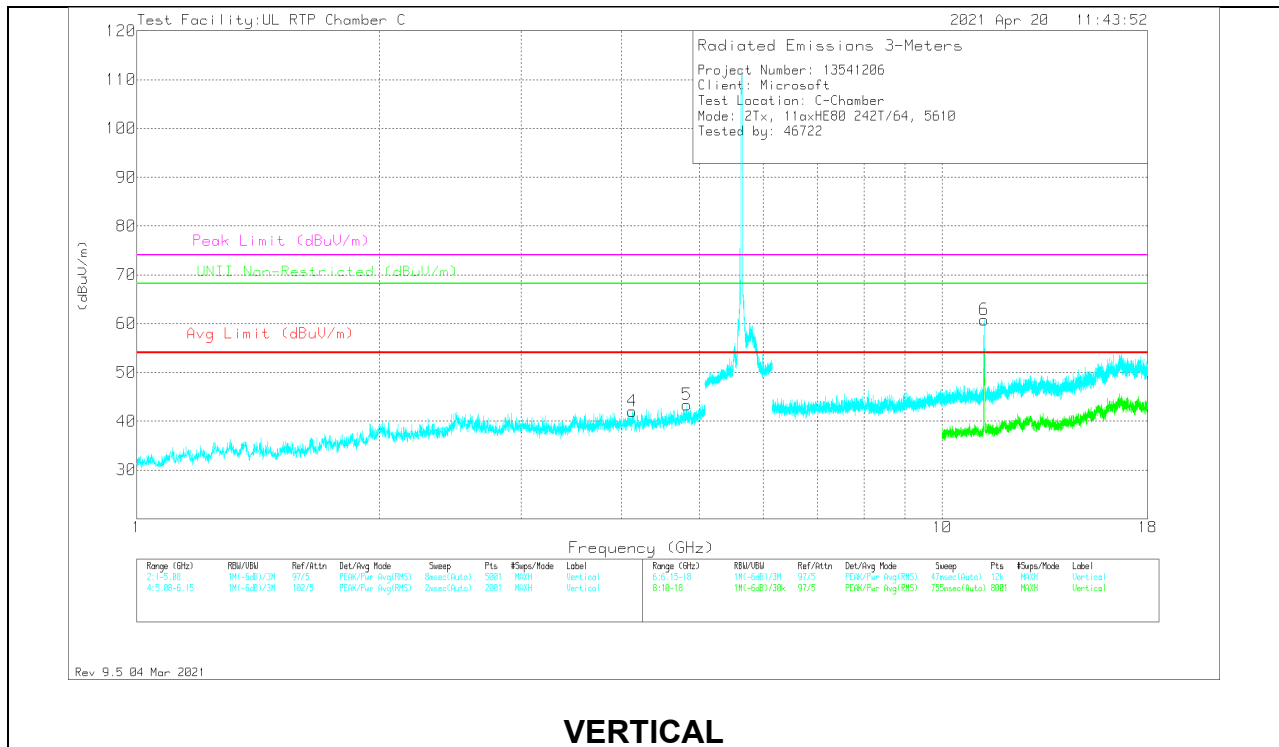

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38557	61.23	Pk	32.1	-51.3	42.03	54	-11.97	74	-31.97	-	-	0-360	101	H
2	*** 3.91965	56.16	Pk	33.6	-47.2	42.56	54	-11.44	74	-31.44	-	-	0-360	101	H
4	*** 4.12691	55.68	Pk	33.6	-47.2	42.08	54	-11.92	74	-31.92	-	-	0-360	200	V
5	*** 4.82296	55.34	Pk	34.2	-46.2	43.34	54	-10.66	74	-30.66	-	-	0-360	101	V
3	*** 11.27695	63.48	PK-U	38.2	-39.4	62.28	-	-	74	-11.72	-	-	134	231	H
	*** 11.27557	50.33	ADV	38.2	-39.3	49.23	54	-4.77	-	-	-	-	134	231	H
6	*** 11.27775	67.39	PK-U	38.2	-39.4	66.19	-	-	74	-7.81	-	-	164	238	V
	*** 11.27885	54.48	ADV	38.2	-39.4	53.28	54	-7.2	-	-	-	-	164	238	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

CHANNEL 138

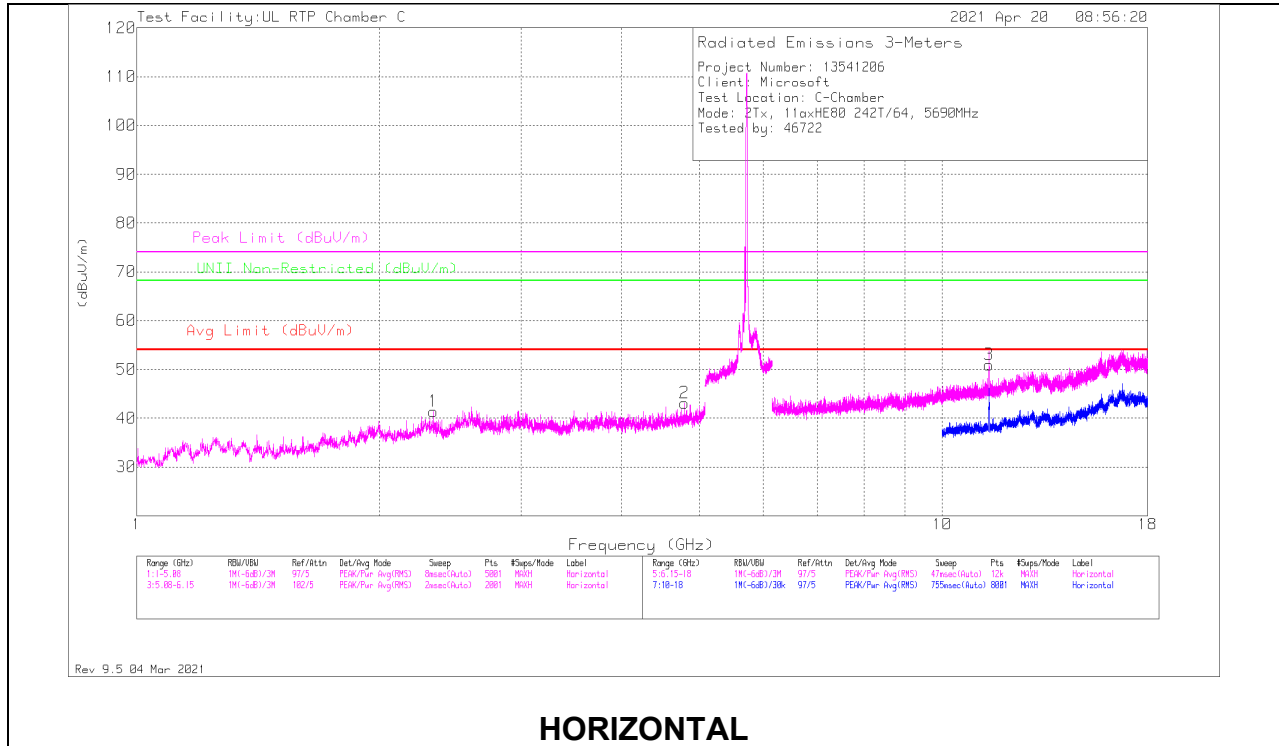

HORIZONTAL

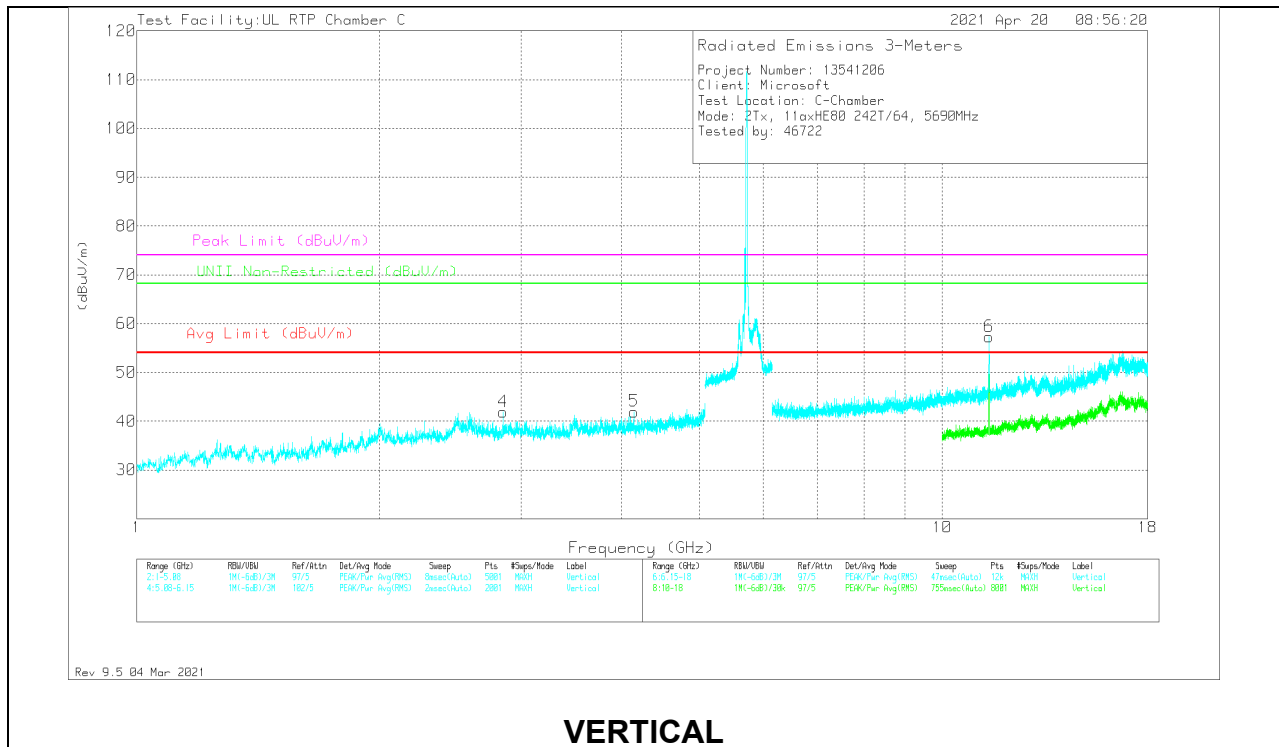

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.33579	60.52	Pk	32	-51.1	41.42	54	-12.58	74	-32.58	-	-	0-360	101	H
2	*** 4.79114	55.41	Pk	34.3	-46.6	43.11	54	-10.89	74	-30.89	-	-	0-360	101	H
4	*** 2.85069	59.07	Pk	32.5	-49.7	41.87	54	-12.13	74	-32.13	-	-	0-360	101	V
5	*** 4.14405	55.67	Pk	33.5	-47.2	41.97	54	-12.03	74	-32.03	-	-	0-360	199	V
3	*** 11.4399	57.07	PK-U	38.3	-39.6	55.77	-	-	74	-18.23	-	-	96	145	H
	*** 11.4395	44.67	ADV	38.3	-39.6	43.37	54	-10.63	-	-	-	-	96	145	H
6	*** 11.44007	62.66	PK-U	38.4	-39.6	61.46	-	-	74	-12.54	-	-	165	235	V
	*** 11.43564	50.56	ADV	38.3	-39.3	49.56	54	-4.44	-	-	-	-	165	235	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: SU, Single User

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

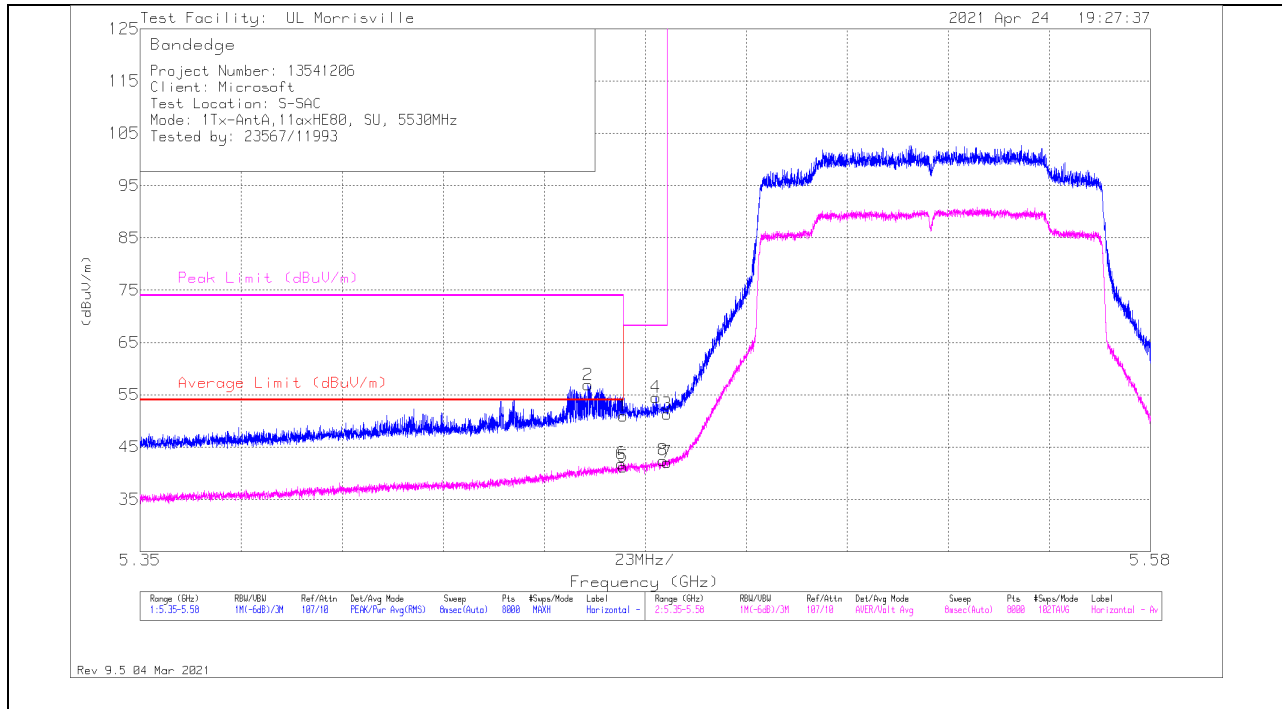

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	39.94	Pk	34.5	-23.5	0	50.94	-	-	74	-23.06	212	286	H
2	*** 5.45196	45.8	PK	34.5	-23.4	0	56.9	-	-	74	-17.1	212	286	H
5	*** 5.45998	29.99	ADV	34.5	-23.5	.24	41.23	54	-12.77	-	-	212	286	H
6	*** 5.45952	30.56	ADV	34.5	-23.5	.24	41.8	54	-12.2	-	-	212	286	H
4	5.46743	43.59	Pk	34.5	-23.6	0	54.49	-	-	68.2	-13.71	212	286	H
8	5.46904	31.22	ADV	34.5	-23.5	.24	42.46	-	-	-	-	212	286	H
3	5.46999	40.3	Pk	34.5	-23.5	0	51.3	-	-	68.2	-16.9	212	286	H
7	5.46999	30.83	ADV	34.5	-23.5	.24	42.07	-	-	-	-	212	286	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

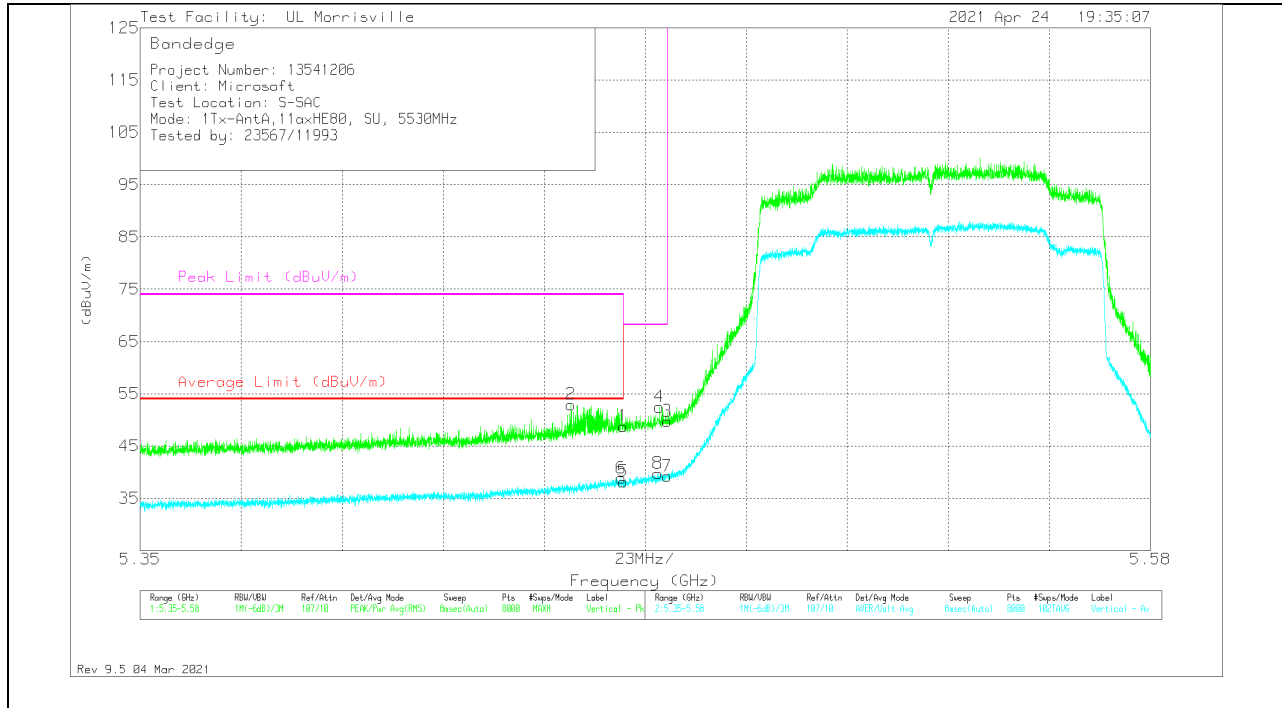

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	37.79	Pk	34.5	-23.5	0	48.79	-	-	74	-25.21	190	259	V
2	* ** 5.44811	41.83	Pk	34.5	-23.4	0	52.93	-	-	74	-21.07	190	259	V
5	* ** 5.45998	26.96	ADV	34.5	-23.5	.24	38.2	54	-15.8	-	-	190	259	V
6	* ** 5.4595	27.62	ADV	34.5	-23.5	.24	38.86	54	-15.14	-	-	190	259	V
8	5.46786	28.61	ADV	34.5	-23.6	.24	39.75	-	-	-	-	190	259	V
4	5.46821	41.56	Pk	34.5	-23.6	0	52.46	-	-	68.2	-15.74	190	259	V
3	5.46999	38.72	Pk	34.5	-23.5	0	49.72	-	-	68.2	-18.48	190	259	V
7	5.46999	27.97	ADV	34.5	-23.5	.24	39.21	-	-	-	-	190	259	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

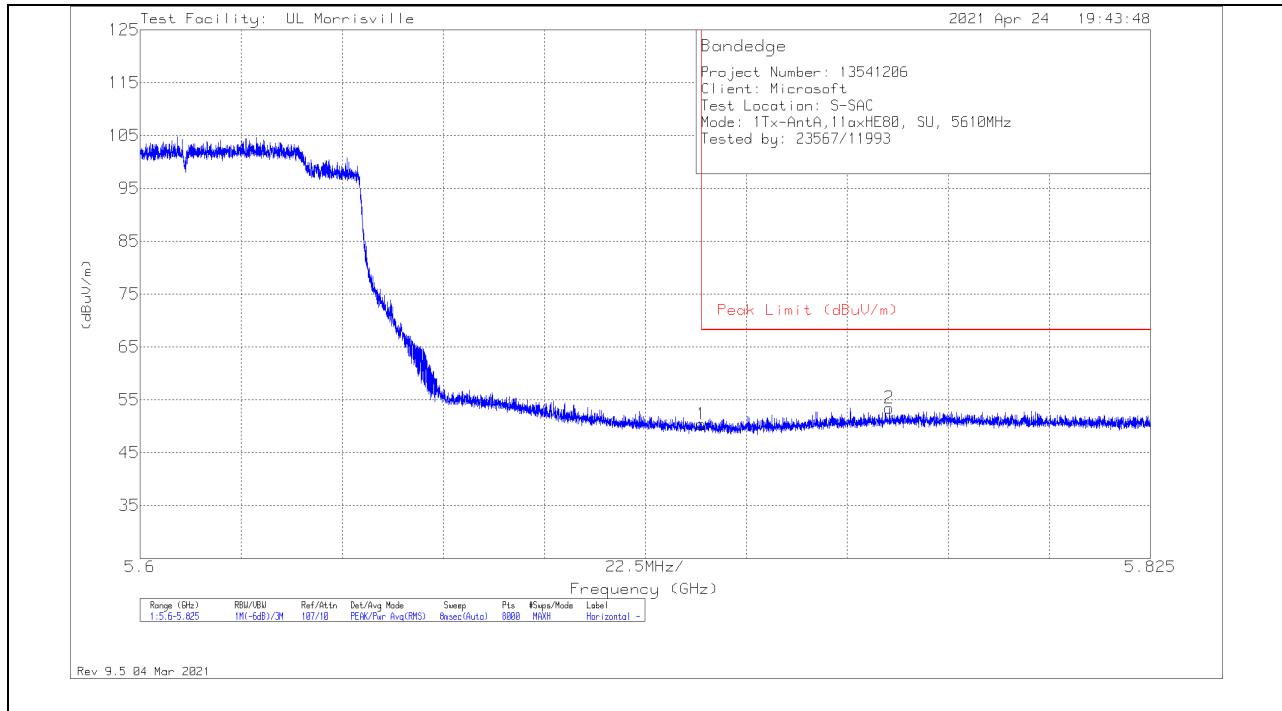

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.26	Pk	34.6	-23.5	50.36	68.2	-17.84	224	250	H
2	5.76686	42.03	Pk	34.7	-23.3	53.43	68.2	-14.77	224	250	H

Pk - Peak detector

VERTICAL RESULT

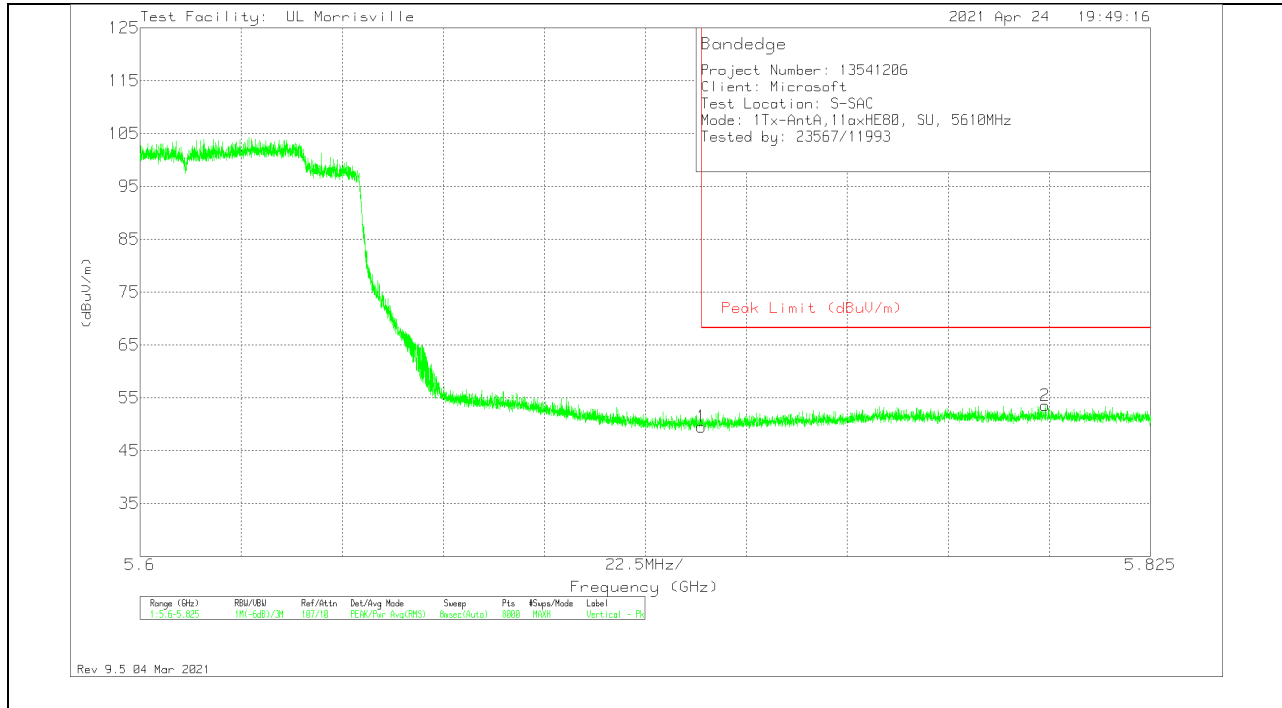


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	38.42	Pk	34.6	-23.5	49.52	68.2	-18.68	208	191	V
2	5.80157	41.92	Pk	34.7	-23.1	53.52	68.2	-14.68	208	191	V

Pk - Peak detector

1TX Antenna 1 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

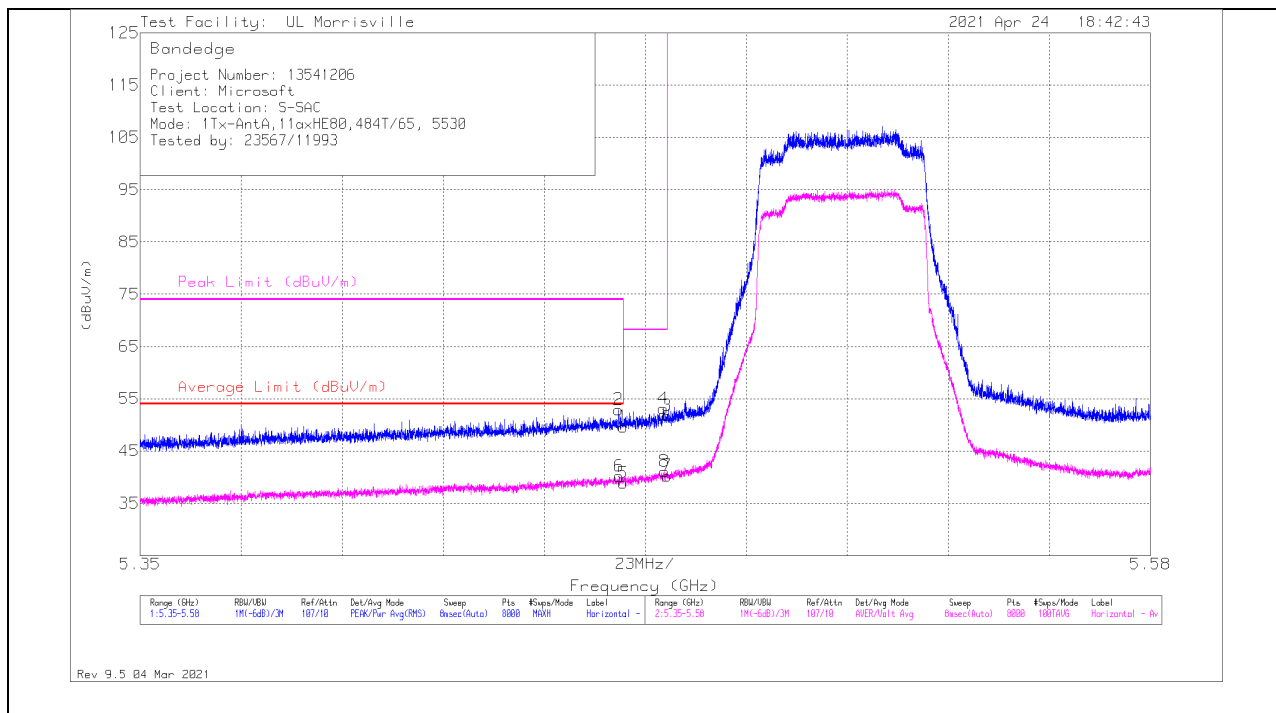

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45998	38.65	Pk	34.5	-23.5	49.65	-	-	74	-24.35	220	229	H
2	** * 5.45892	41.89	Pk	34.5	-23.5	52.89	-	-	74	-21.11	220	229	H
5	** * 5.45998	27.87	ADV	34.5	-23.5	38.87	54	-15.13	-	-	220	229	H
6	** * 5.45906	29.17	ADV	34.5	-23.5	40.17	54	-13.83	-	-	220	229	H
4	5.4691	42.11	Pk	34.5	-23.5	53.11	-	-	68.2	-15.09	220	229	H
8	5.46936	30.09	ADV	34.5	-23.5	41.09	-	-	-	-	220	229	H
3	5.46999	40.78	PK	34.5	-23.5	51.78	-	-	68.2	-16.42	220	229	H
7	5.46999	29.27	ADV	34.5	-23.5	40.27	-	-	-	-	220	229	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

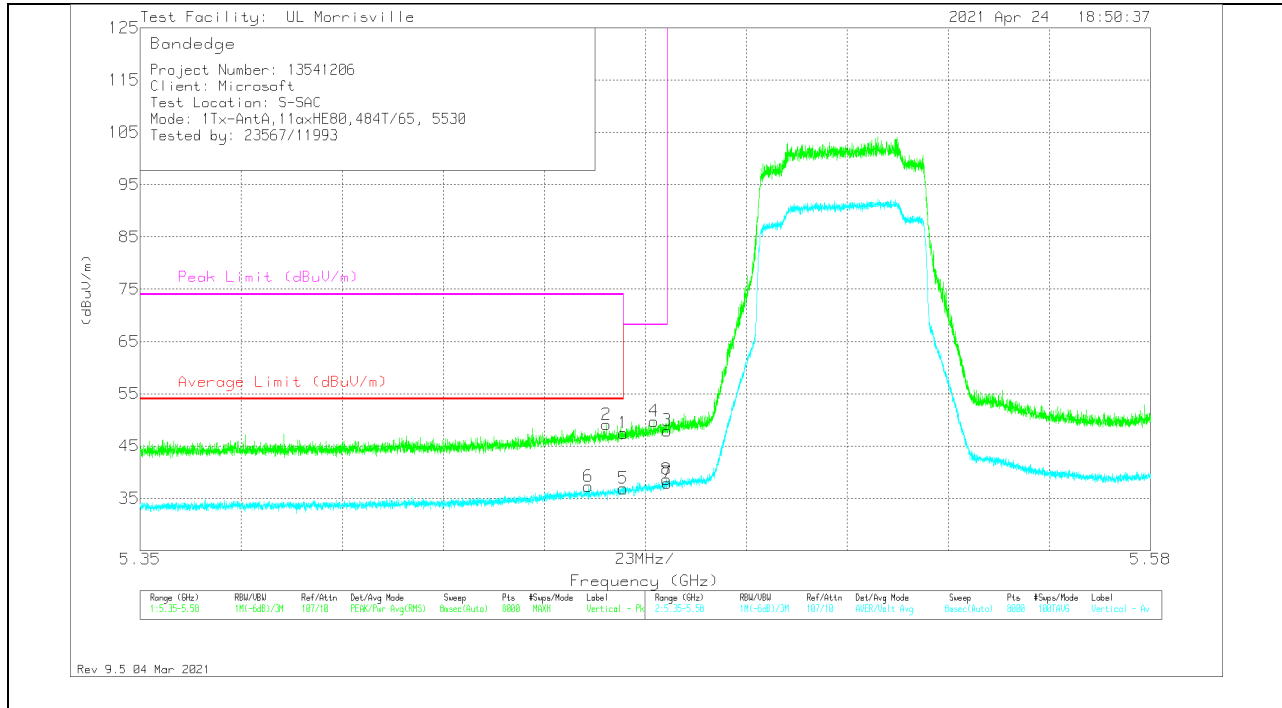

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	36.48	PK	34.5	-23.5	47.48	-	-	74	-26.52	188	262	V
2	*** 5.45613	38.08	PK	34.5	-23.5	49.08	-	-	74	-24.92	188	262	V
5	*** 5.45998	25.88	ADV	34.5	-23.5	36.88	54	-17.12	-	-	188	262	V
6	*** 5.45208	26.17	ADV	34.5	-23.4	37.27	54	-16.73	-	-	188	262	V
4	5.46697	38.85	PK	34.5	-23.6	49.75	-	-	68.2	-18.45	188	262	V
8	5.46985	27.62	ADV	34.5	-23.5	38.62	-	-	-	-	188	262	V
3	5.46999	36.93	PK	34.5	-23.5	47.93	-	-	68.2	-20.27	188	262	V
7	5.46999	26.9	ADV	34.5	-23.5	37.9	-	-	-	-	188	262	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: 484-Tones, RU Index 66

BANDEGE (LOW CHANNEL)


HORIZONTAL RESULT

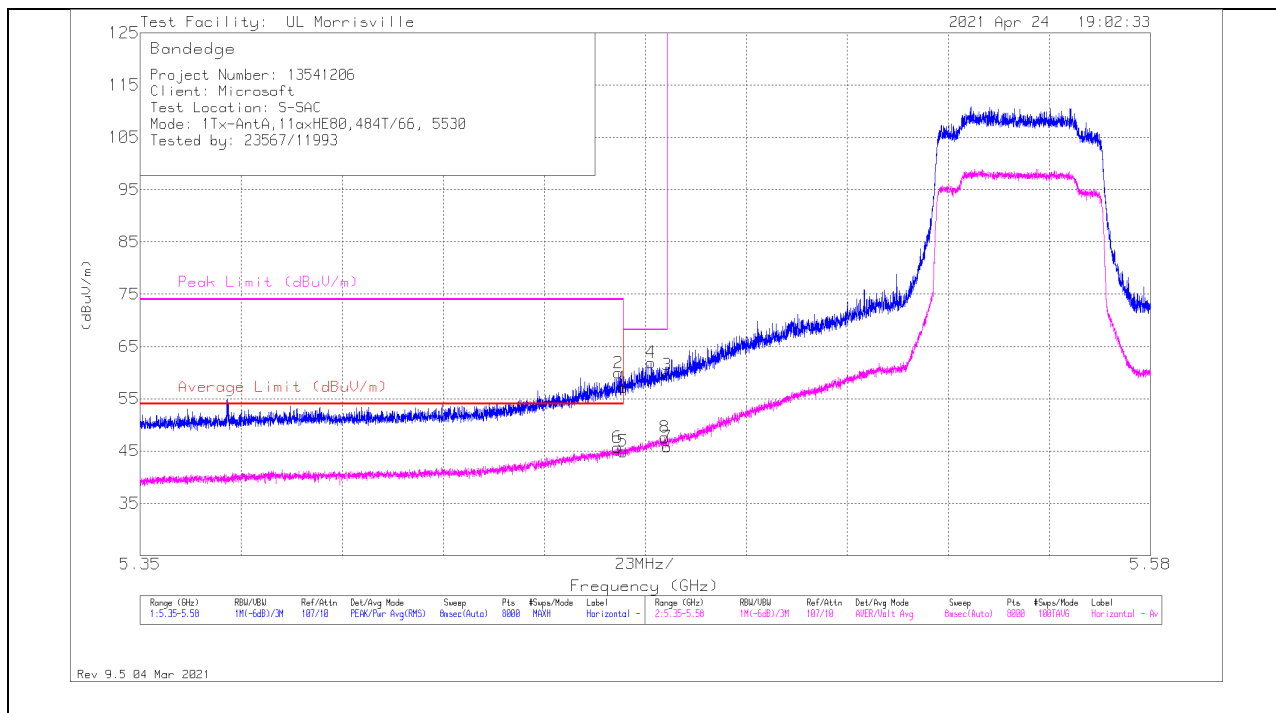

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	46.11	Pk	34.5	-23.5	57.11	-	-	74	-16.89	220	228	H
2	* ** 5.45892	48.91	Pk	34.5	-23.5	59.91	-	-	74	-14.09	220	228	H
5	* ** 5.45998	33.91	ADV	34.5	-23.5	44.91	54	-9.09	-	-	220	228	H
6	* ** 5.45869	34.68	ADV	34.5	-23.5	45.68	54	-8.32	-	-	220	228	H
4	5.46628	51	Pk	34.5	-23.6	61.9	-	-	68.2	-6.3	220	228	H
8	5.46939	36.6	ADV	34.5	-23.5	47.6	-	-	-	-	220	228	H
3	5.46999	48.58	Pk	34.5	-23.5	59.58	-	-	68.2	-8.62	220	228	H
7	5.46999	34.79	ADV	34.5	-23.5	45.79	-	-	-	-	220	228	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

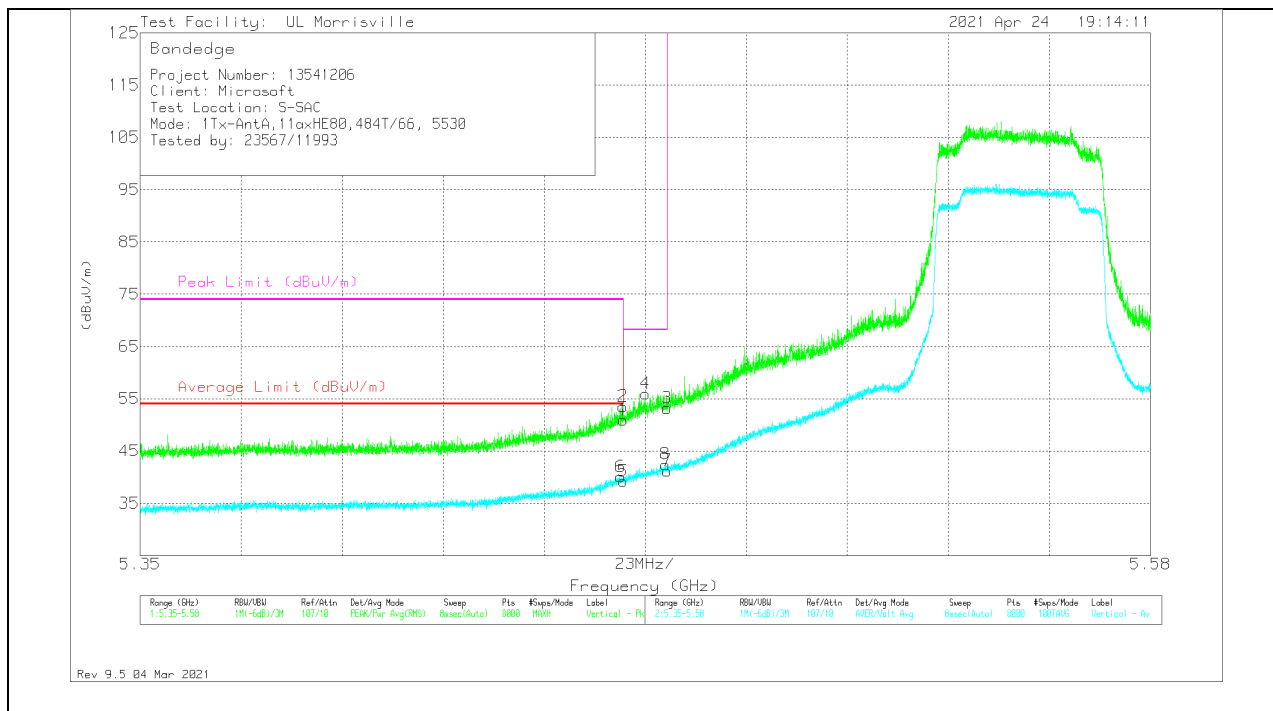

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	39.97	Pk	34.5	-23.5	50.97	-	-	74	-23.03	192	158	V
2	*** 5.45993	42.52	Pk	34.5	-23.5	53.52	-	-	74	-20.48	192	158	V
5	*** 5.45998	28.23	ADV	34.5	-23.5	39.23	54	-14.77	-	-	192	158	V
6	*** 5.45938	29.08	ADV	34.5	-23.5	40.08	54	-13.92	-	-	192	158	V
4	5.46507	44.96	Pk	34.5	-23.5	55.96	-	-	68.2	-12.24	192	158	V
8	5.46959	31.46	ADV	34.5	-23.5	42.46	-	-	-	-	192	158	V
3	5.46999	42.2	Pk	34.5	-23.5	53.2	-	-	68.2	-15	192	158	V
7	5.46999	30.23	ADV	34.5	-23.5	41.23	-	-	-	-	192	158	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

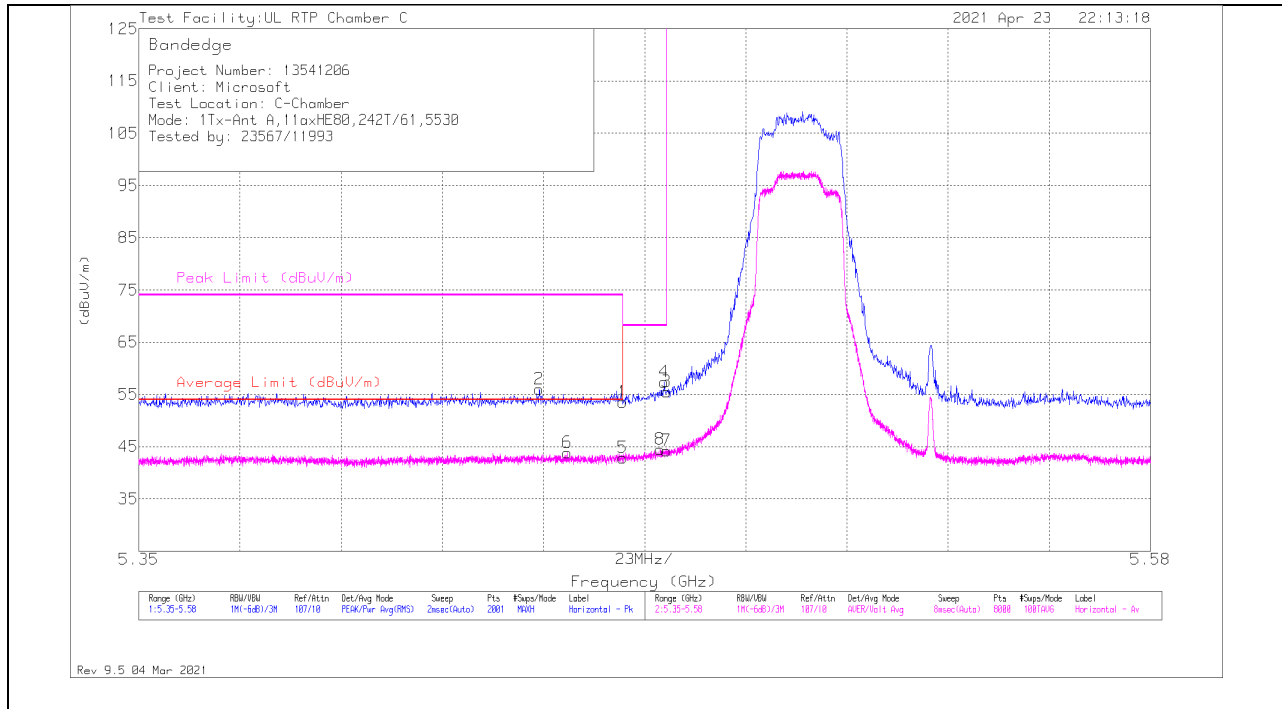

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45994	31.77	Pk	34.8	-13.1	53.47	-	-	74	-20.53	266	168	H
2	** * 5.44097	34.39	Pk	34.8	-13.2	55.99	-	-	74	-18.01	266	168	H
5	** * 5.45998	21.13	ADV	34.8	-13.1	42.83	54	-11.17	-	-	266	168	H
6	** * 5.44748	22.23	ADV	34.8	-13.2	43.83	54	-10.17	-	-	266	168	H
8	5.46844	22.8	ADV	34.8	-13.2	44.4	-	-	-	-	266	168	H
4	5.46949	35.82	Pk	34.8	-13.2	57.42	-	-	68.2	-10.78	266	168	H
3	5.46995	33.95	Pk	34.8	-13.2	55.55	-	-	68.2	-12.65	266	168	H
7	5.46999	22.57	ADV	34.8	-13.2	44.17	-	-	-	-	266	168	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

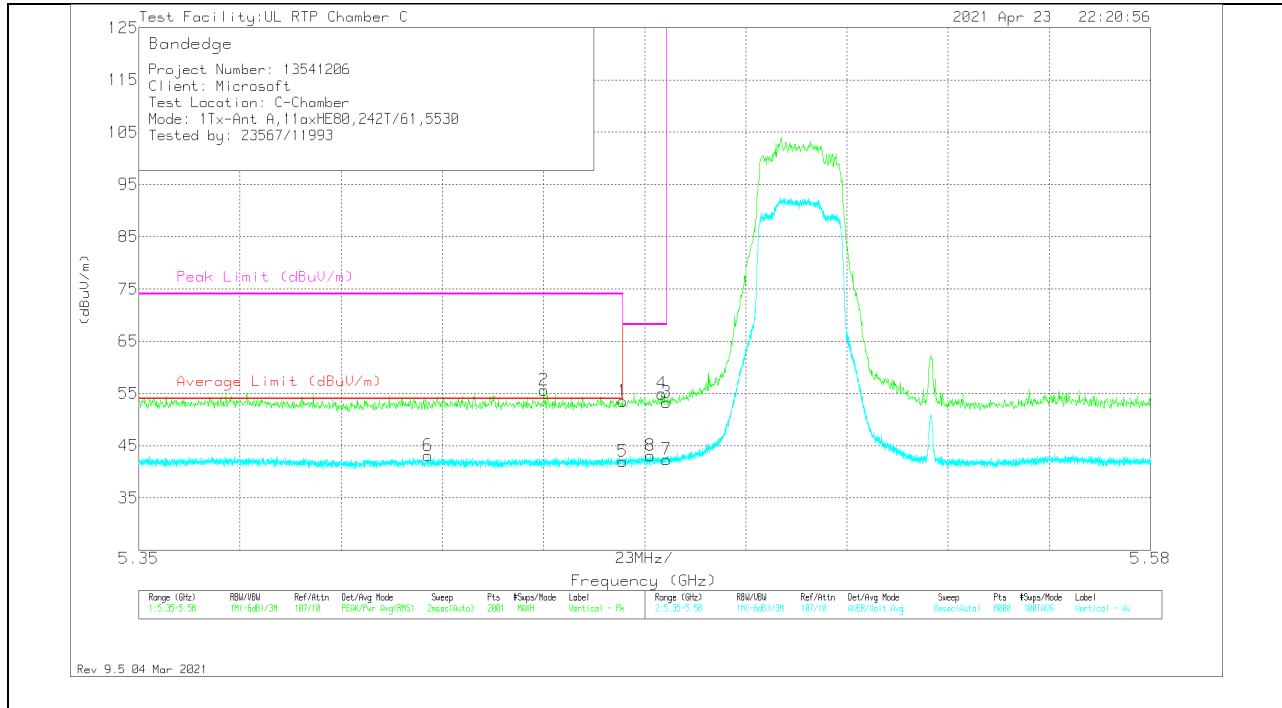

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	31.78	Pk	34.8	-13.1	53.48	-	-	74	-20.52	197	230	V
2	*** 5.44212	33.98	Pk	34.8	-13.2	55.58	-	-	74	-18.42	197	230	V
5	*** 5.45998	20.23	ADV	34.8	-13.1	41.93	54	-12.07	-	-	197	230	V
6	*** 5.4157	21.69	ADV	34.8	-13.4	43.09	54	-10.91	-	-	197	230	V
8	5.46622	21.4	ADV	34.8	-13.1	43.1	-	-	-	-	197	230	V
4	5.46891	33.35	Pk	34.8	-13.2	54.95	-	-	68.2	-13.25	197	230	V
3	5.46995	31.64	Pk	34.8	-13.2	53.24	-	-	68.2	-14.96	197	230	V
7	5.46999	20.69	ADV	34.8	-13.2	42.29	-	-	-	-	197	230	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: 242-Tones, RU Index 62

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

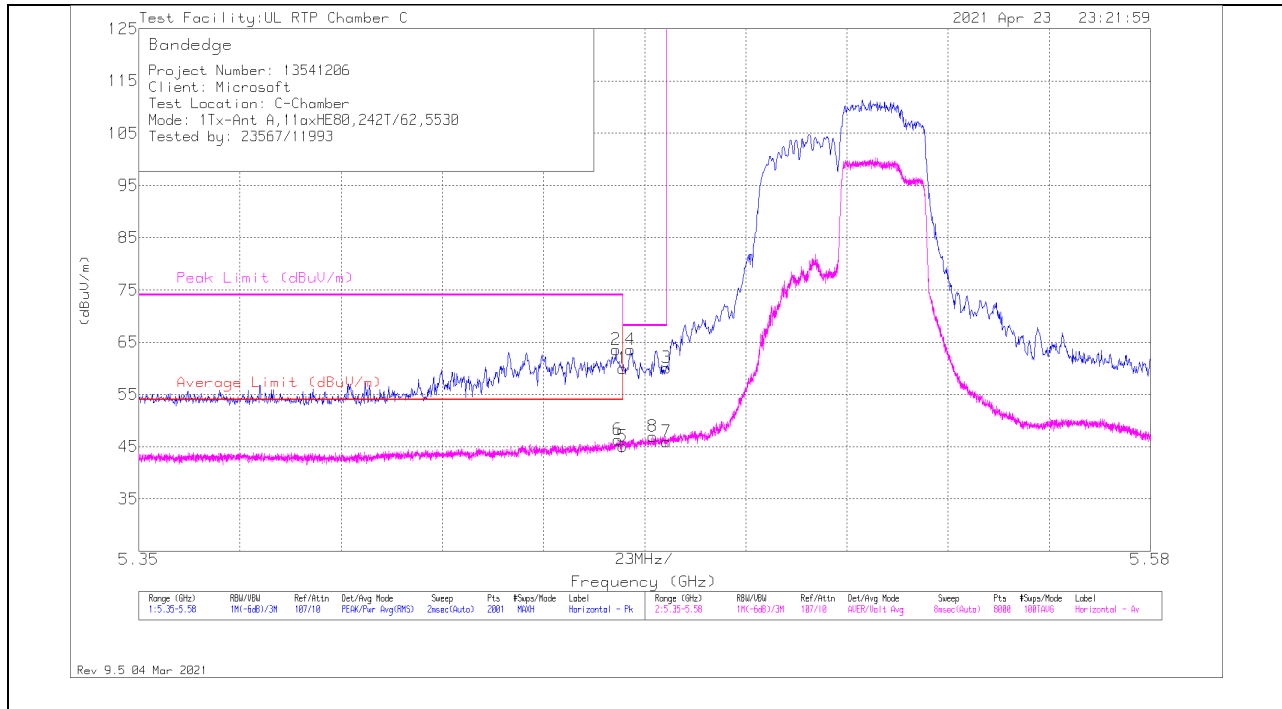

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45994	38.25	Pk	34.8	-13.1	59.95	-	-	74	-14.05	205	231	H
2	** * 5.45845	42.03	Pk	34.8	-13.2	63.63	-	-	74	-10.37	205	231	H
5	** * 5.45998	23.42	ADV	34.8	-13.1	45.12	54	-8.88	-	-	205	231	H
6	** * 5.45895	24.61	ADV	34.8	-13.1	46.31	54	-7.69	-	-	205	231	H
4	5.46178	41.88	Pk	34.8	-13.1	63.58	-	-	68.2	-4.62	205	231	H
8	5.46683	25.27	ADV	34.8	-13.1	46.97	-	-	-	-	205	231	H
3	5.46995	38.46	Pk	34.8	-13.2	60.06	-	-	68.2	-8.14	205	231	H
7	5.46999	24.34	ADV	34.8	-13.2	45.94	-	-	-	-	205	231	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

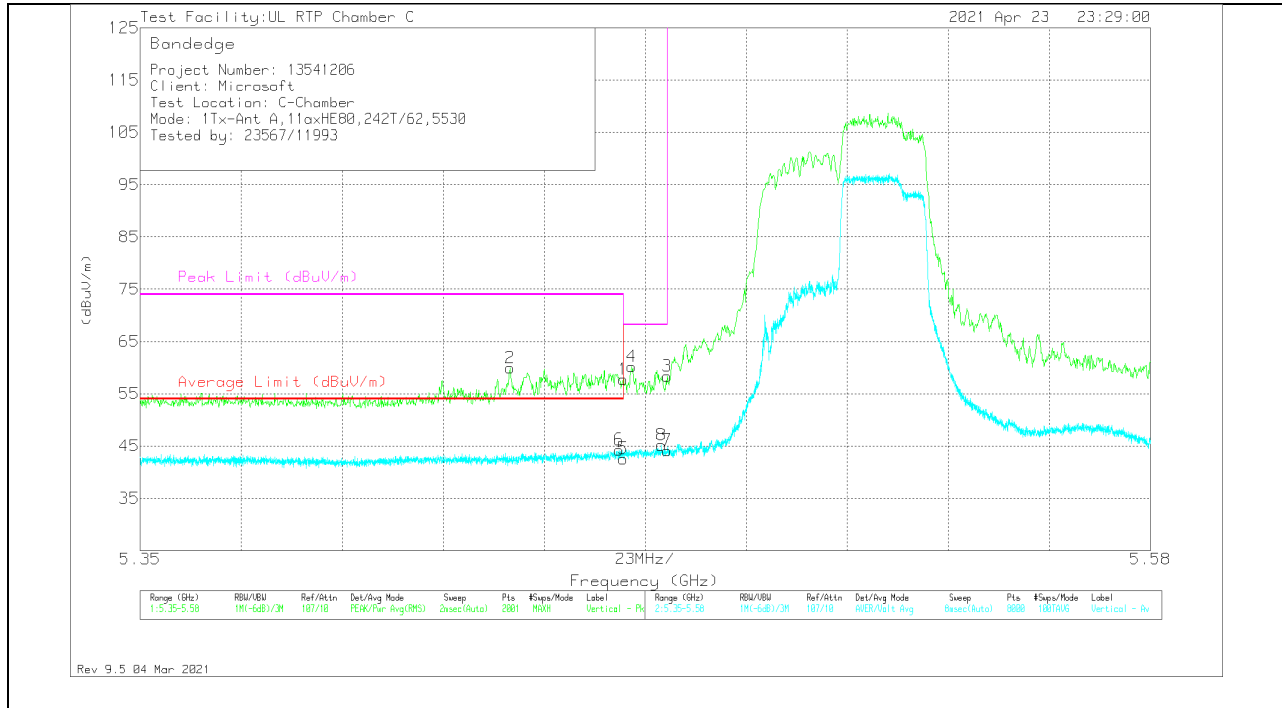

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	36.03	Pk	34.8	-13.1	57.73	-	-	74	-16.27	193	196	V
2	*** 5.43418	38.52	Pk	34.8	-13.4	59.92	-	-	74	-14.08	193	196	V
5	*** 5.45998	20.85	ADV	34.8	-13.1	42.55	54	-11.45	-	-	193	196	V
6	*** 5.45906	22.55	ADV	34.8	-13.1	44.25	54	-9.75	-	-	193	196	V
4	5.4619	38.46	Pk	34.8	-13.1	60.16	-	-	68.2	-8.04	193	196	V
8	5.46867	23.57	ADV	34.8	-13.2	45.17	-	-	-	-	193	196	V
3	5.46995	36.73	Pk	34.8	-13.2	58.33	-	-	68.2	-9.87	193	196	V
7	5.46999	22.53	ADV	34.8	-13.2	44.13	-	-	-	-	193	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

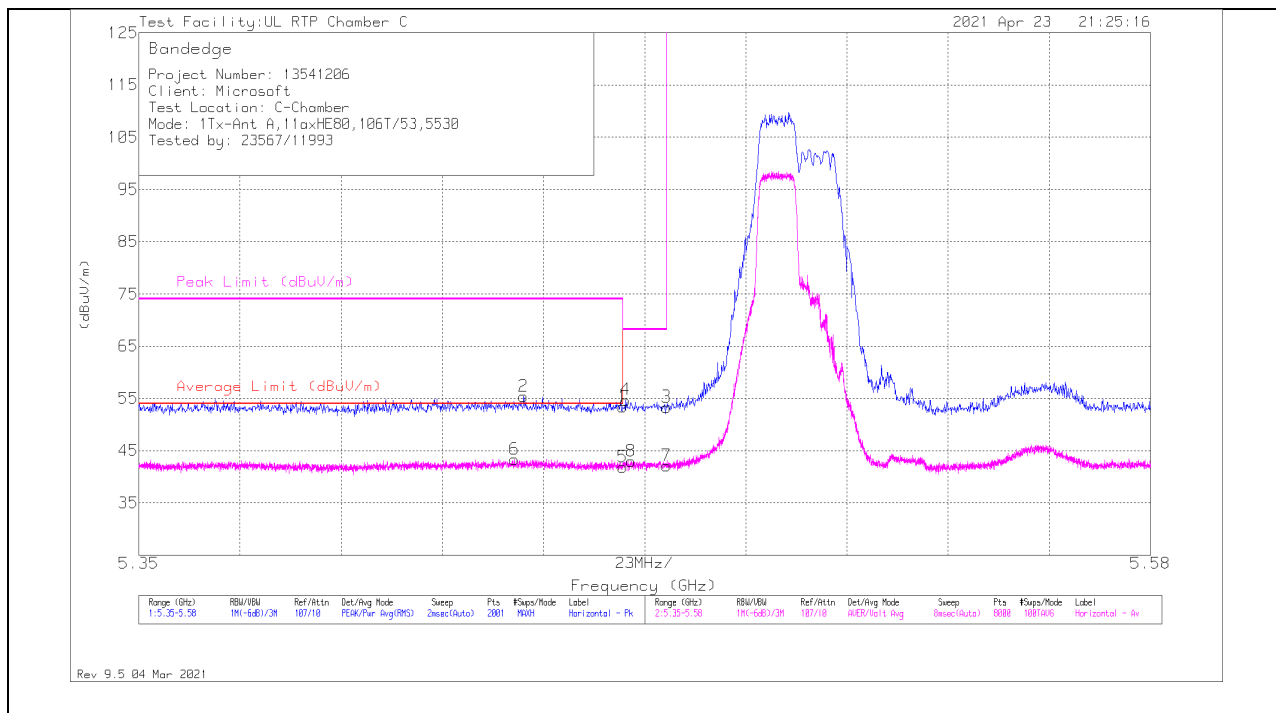

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45994	31.69	Pk	34.8	-13.1	53.39	-	-	74	-20.61	240	263	H
2	* ** 5.43752	33.9	Pk	34.8	-13.3	55.4	-	-	74	-18.6	240	263	H
5	* ** 5.45998	20.16	ADV	34.8	-13.1	41.86	54	-12.14	-	-	240	263	H
6	* ** 5.4354	21.83	ADV	34.8	-13.3	43.33	54	-10.67	-	-	240	263	H
4	5.46063	33	Pk	34.8	-13.1	54.7	-	-	68.2	-13.5	240	263	H
8	5.46191	21.26	ADV	34.8	-13.1	42.96	-	-	-	-	240	263	H
3	5.46995	31.73	Pk	34.8	-13.2	53.33	-	-	68.2	-14.87	240	263	H
7	5.46999	20.51	ADV	34.8	-13.2	42.11	-	-	-	-	240	263	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

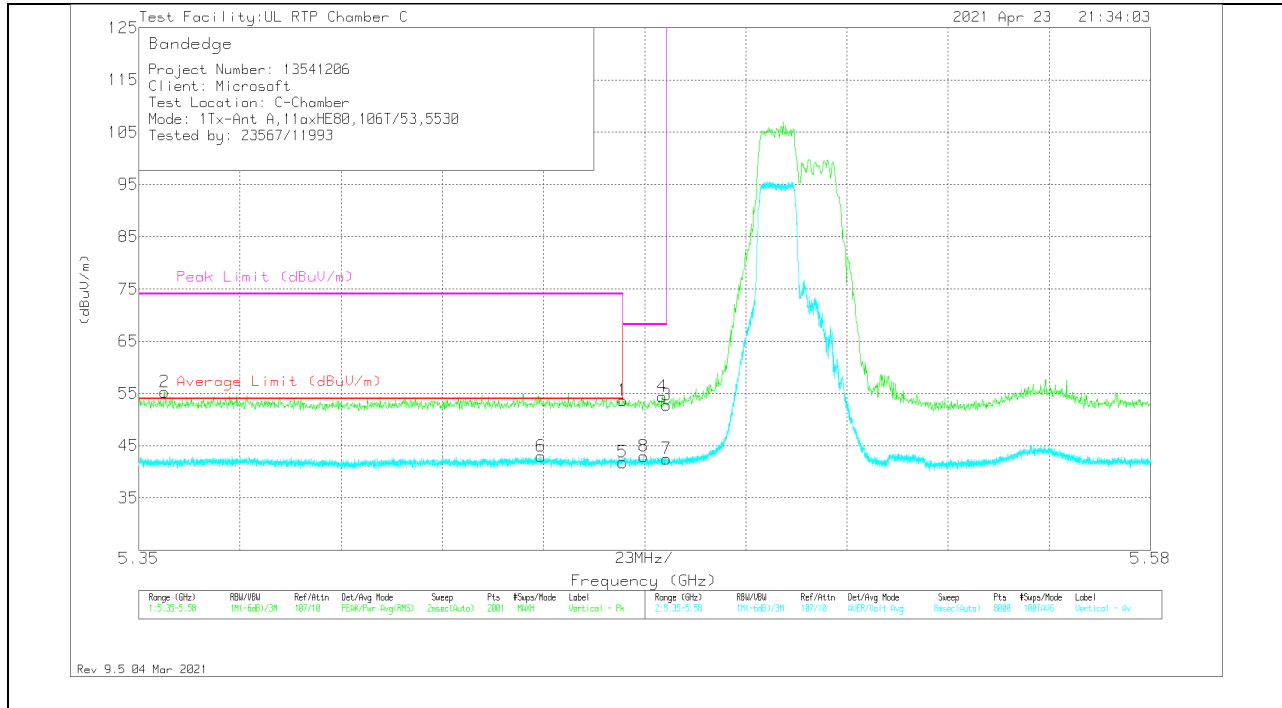

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	31.97	Pk	34.8	-13.1	53.67	-	-	74	-20.33	186	248	V
2	*** 5.35587	33.96	Pk	34.7	-13.4	55.26	-	-	74	-18.74	186	248	V
5	*** 5.45998	20.09	ADV	34.8	-13.1	41.79	54	-12.21	-	-	186	248	V
6	*** 5.44144	21.35	ADV	34.8	-13.2	42.95	54	-11.05	-	-	186	248	V
8	5.46479	21.26	ADV	34.8	-13.1	42.96	-	-	-	-	186	248	V
4	5.46903	32.76	Pk	34.8	-13.2	54.36	-	-	68.2	-13.84	186	248	V
3	5.46995	31.13	Pk	34.8	-13.2	52.73	-	-	68.2	-15.47	186	248	V
7	5.46999	20.83	ADV	34.8	-13.2	42.43	-	-	-	-	186	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

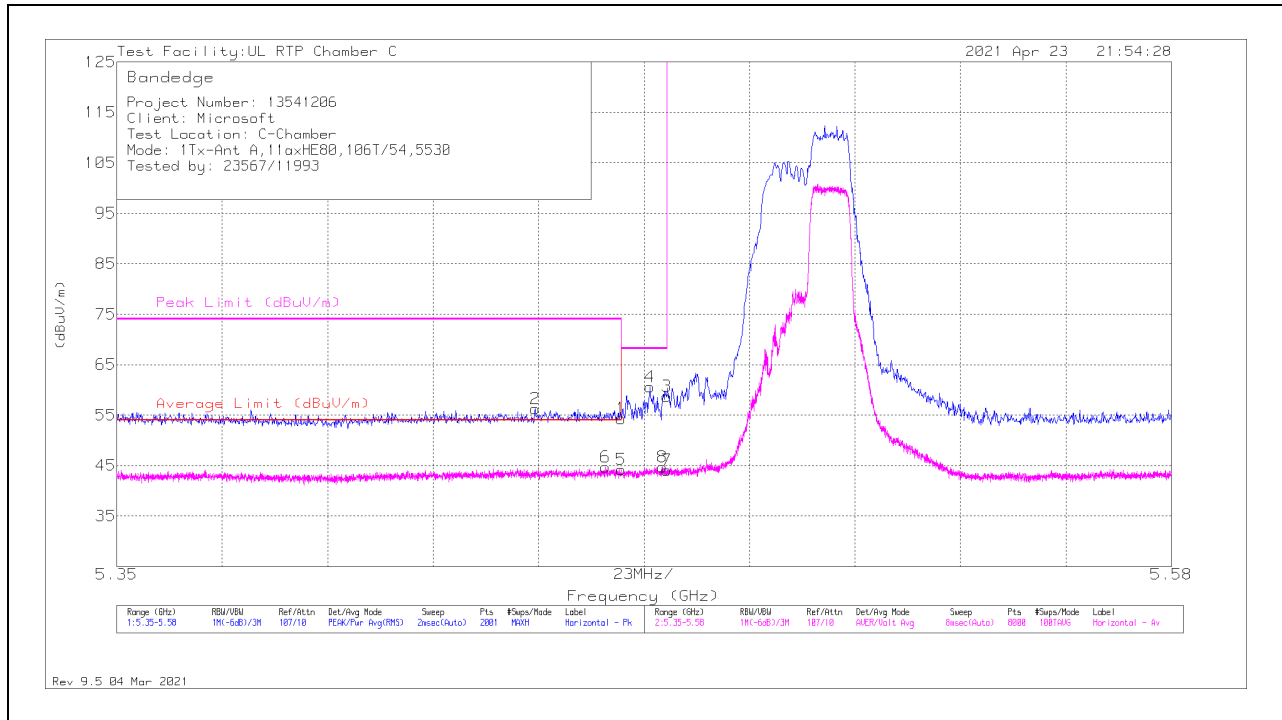

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45994	32.63	Pk	34.8	-13.1	54.33	-	-	74	-19.67	208	249	H
2	* ** 5.44131	34.67	Pk	34.8	-13.2	56.27	-	-	74	-17.73	208	249	H
5	* ** 5.45998	22.56	ADV	34.8	-13.1	44.26	54	-9.74	-	-	208	249	H
6	* ** 5.45665	23.11	ADV	34.8	-13.2	44.71	54	-9.29	-	-	208	249	H
4	5.46627	38.89	Pk	34.8	-13.1	60.59	-	-	68.2	-7.61	208	249	H
8	5.46901	23.16	ADV	34.8	-13.2	44.76	-	-	-	-	208	249	H
3	5.46995	37.14	Pk	34.8	-13.2	58.74	-	-	68.2	-9.46	208	249	H
7	5.46999	22.53	ADV	34.8	-13.2	44.13	-	-	-	-	208	249	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

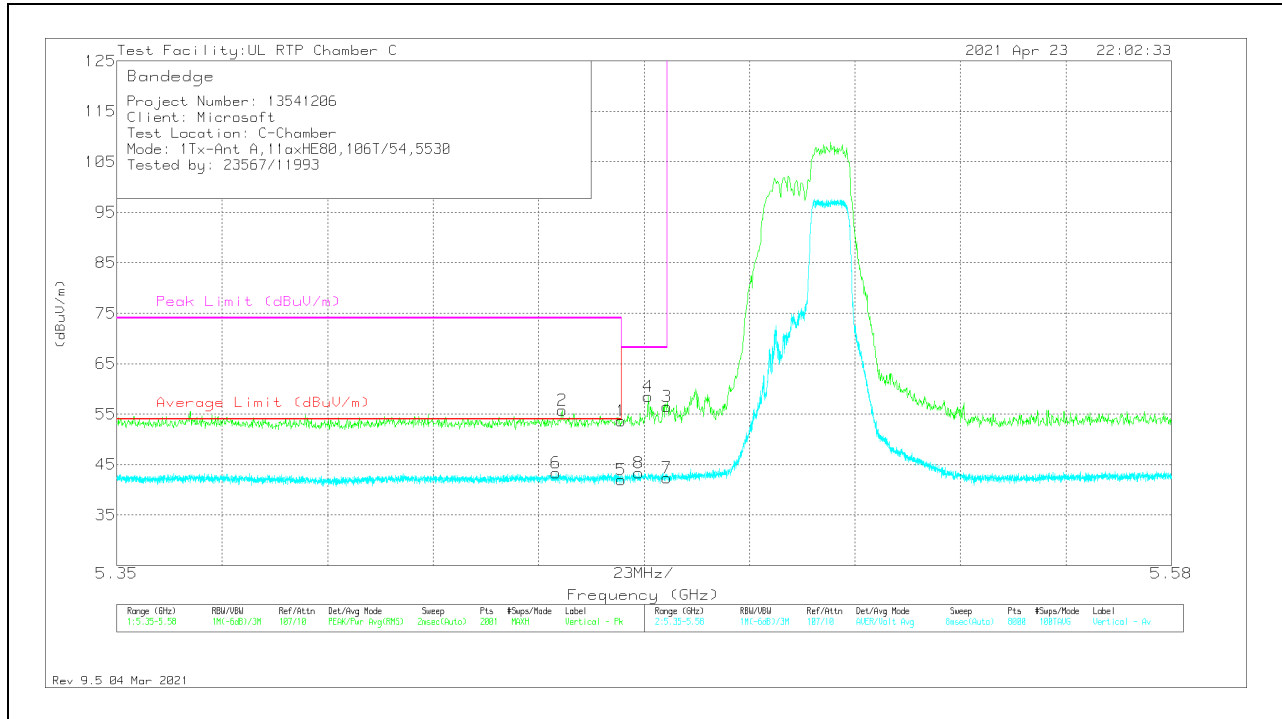


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	31.93	Pk	34.8	-13.1	53.63	-	-	74	-20.37	197	185	V
2	*** 5.44718	34.19	Pk	34.8	-13.2	55.79	-	-	74	-18.21	197	185	V
5	*** 5.45998	20.22	ADV	34.8	-13.1	41.92	54	-12.08	-	-	197	185	V
6	*** 5.44578	21.73	ADV	34.8	-13.2	43.33	54	-10.67	-	-	197	185	V
8	5.46381	21.68	ADV	34.8	-13.1	43.38	-	-	-	-	197	185	V
4	5.46592	36.79	Pk	34.8	-13.1	58.49	-	-	68.2	-9.71	197	185	V
3	5.46995	34.91	Pk	34.8	-13.2	56.51	-	-	68.2	-11.69	197	185	V
7	5.46999	20.77	ADV	34.8	-13.2	42.37	-	-	-	-	197	185	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: 52-Tones, RU Index 37

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

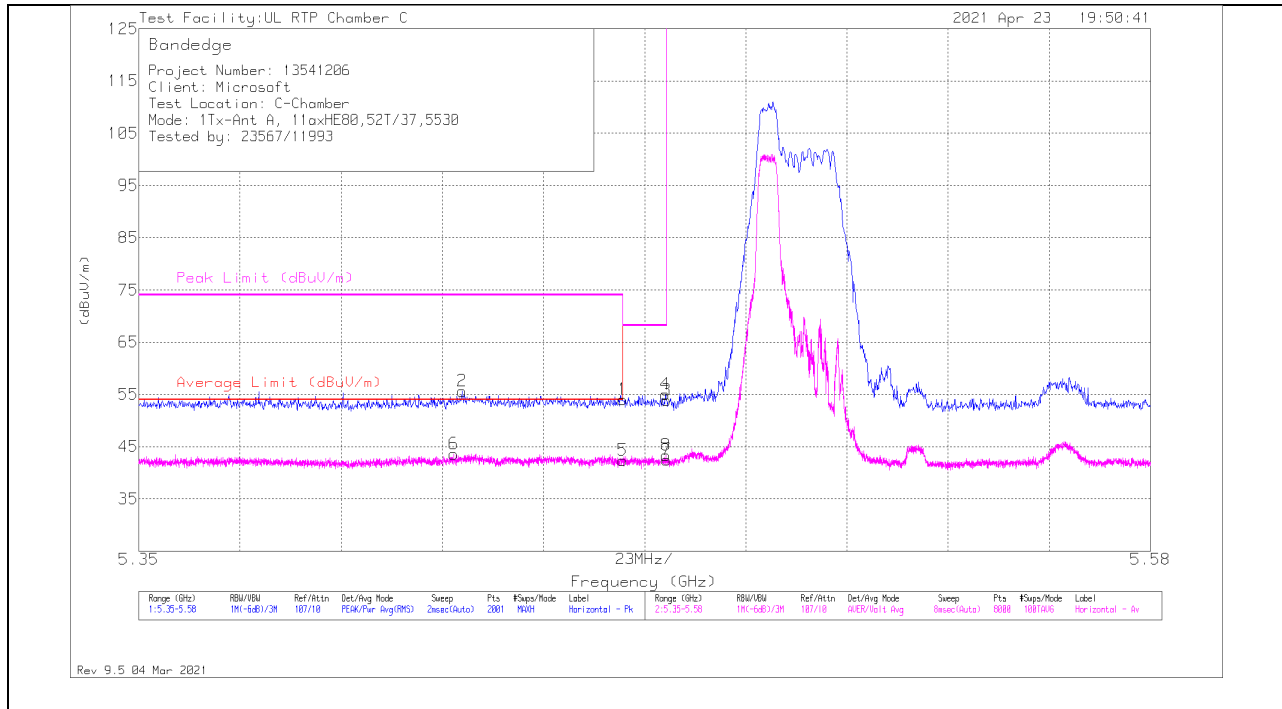

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45994	32.26	Pk	34.8	-13.1	53.96	-	-	74	-20.04	272	166	H
2	** * 5.42349	34.19	Pk	34.8	-13.4	55.59	-	-	74	-18.41	272	166	H
5	** * 5.45998	20.63	ADV	34.8	-13.1	42.33	54	-11.67	-	-	272	166	H
6	** * 5.42163	22.23	ADV	34.8	-13.4	43.63	54	-10.37	-	-	272	166	H
4	5.46972	33.43	Pk	34.8	-13.2	55.03	-	-	68.2	-13.17	272	166	H
8	5.46979	21.69	ADV	34.8	-13.2	43.29	-	-	-	-	272	166	H
3	5.46995	32.32	Pk	34.8	-13.2	53.92	-	-	68.2	-14.28	272	166	H
7	5.46999	20.88	ADV	34.8	-13.2	42.48	-	-	-	-	272	166	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

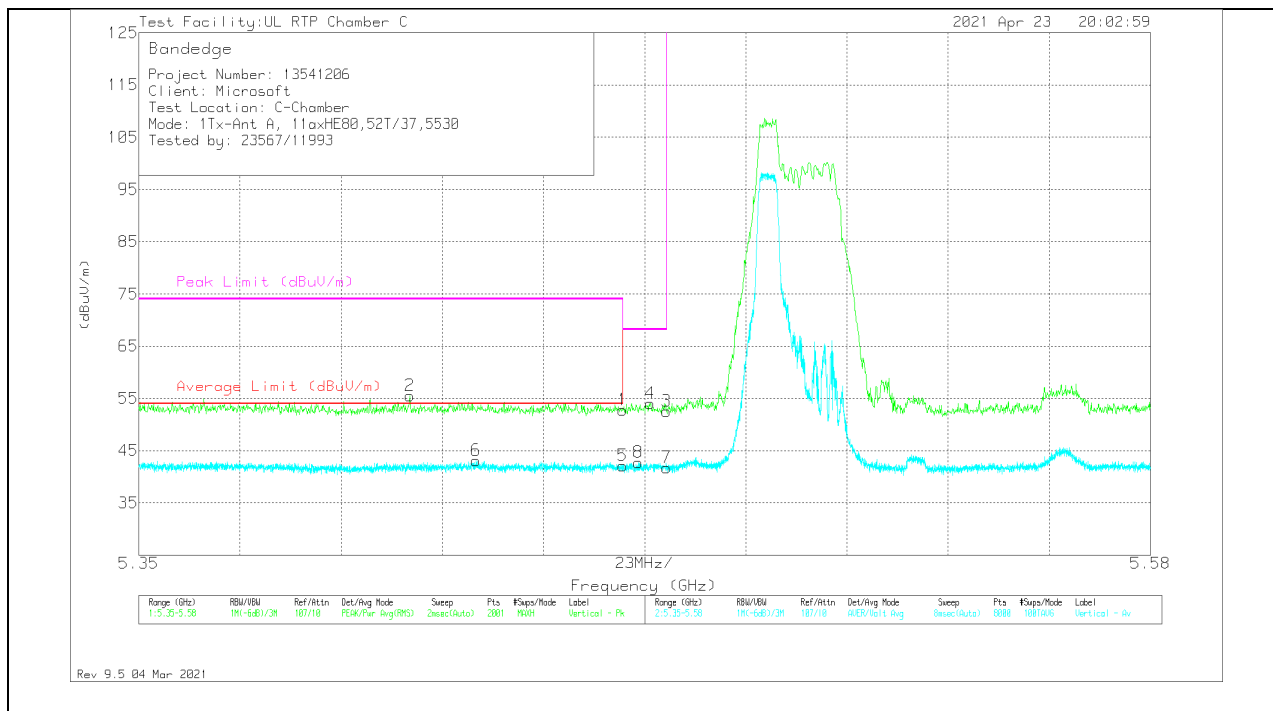

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	31.04	Pk	34.8	-13.1	52.74	-	-	74	-21.26	196	247	V
2	*** 5.41164	34.15	Pk	34.8	-13.4	55.55	-	-	74	-18.45	196	247	V
5	*** 5.45998	20.43	ADV	34.8	-13.1	42.13	54	-11.87	-	-	196	247	V
6	*** 5.42666	21.73	ADV	34.8	-13.4	43.13	54	-10.87	-	-	196	247	V
8	5.46361	21.06	ADV	34.8	-13.1	42.76	-	-	-	-	196	247	V
4	5.46627	32.37	Pk	34.8	-13.1	54.07	-	-	68.2	-14.13	196	247	V
3	5.46995	30.96	Pk	34.8	-13.2	52.56	-	-	68.2	-15.64	196	247	V
7	5.46999	20.07	ADV	34.8	-13.2	41.67	-	-	-	-	196	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: 26-Tones, RU Index 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

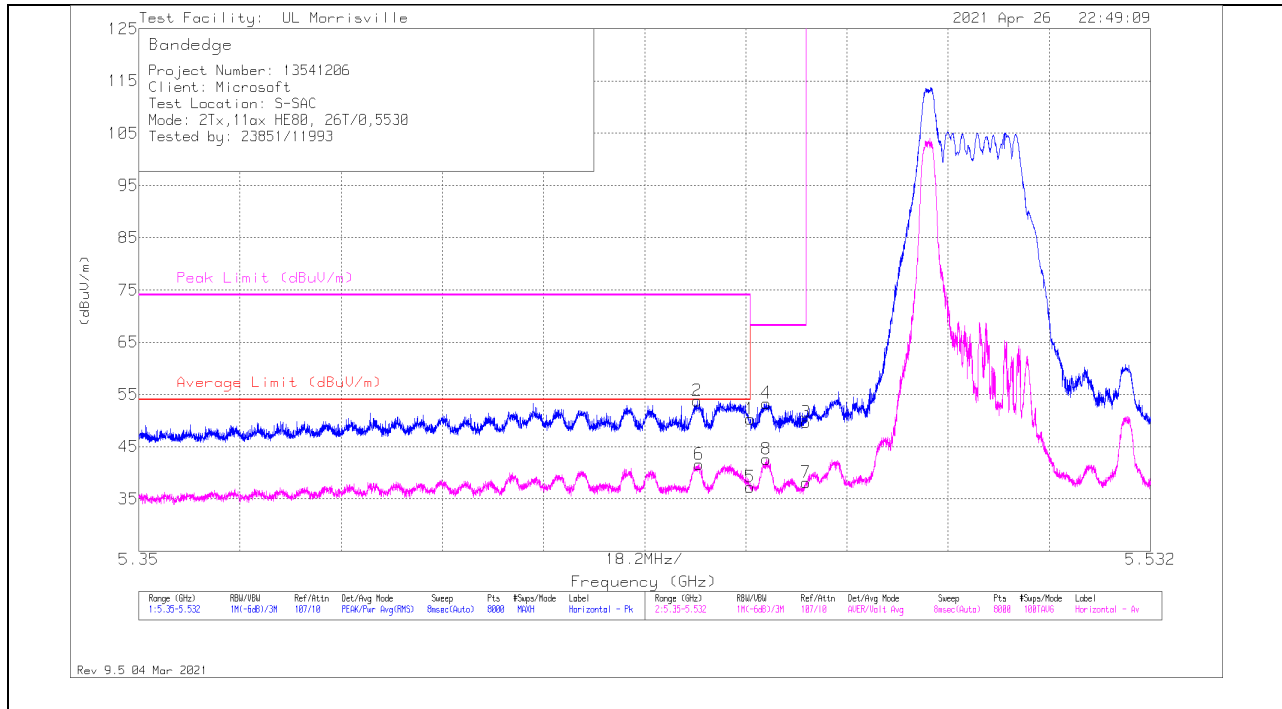

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45999	39.34	Pk	34.5	-23.5	50.34	-	-	74	-23.66	37	398	H
2	** * 5.45048	42.67	Pk	34.5	-23.4	53.77	-	-	74	-20.23	37	398	H
5	** * 5.45999	26.26	ADV	34.5	-23.5	37.26	54	-16.74	-	-	37	398	H
6	** * 5.45075	30.5	ADV	34.5	-23.4	41.6	54	-12.4	-	-	37	398	H
4	5.46285	42.33	Pk	34.5	-23.5	53.33	-	-	68.2	-14.87	37	398	H
8	5.46292	31.58	ADV	34.5	-23.5	42.58	-	-	-	-	37	398	H
3	5.47	38.63	PK	34.5	-23.5	49.63	-	-	68.2	-18.57	37	398	H
7	5.47	27.1	ADV	34.5	-23.5	38.1	-	-	-	-	37	398	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

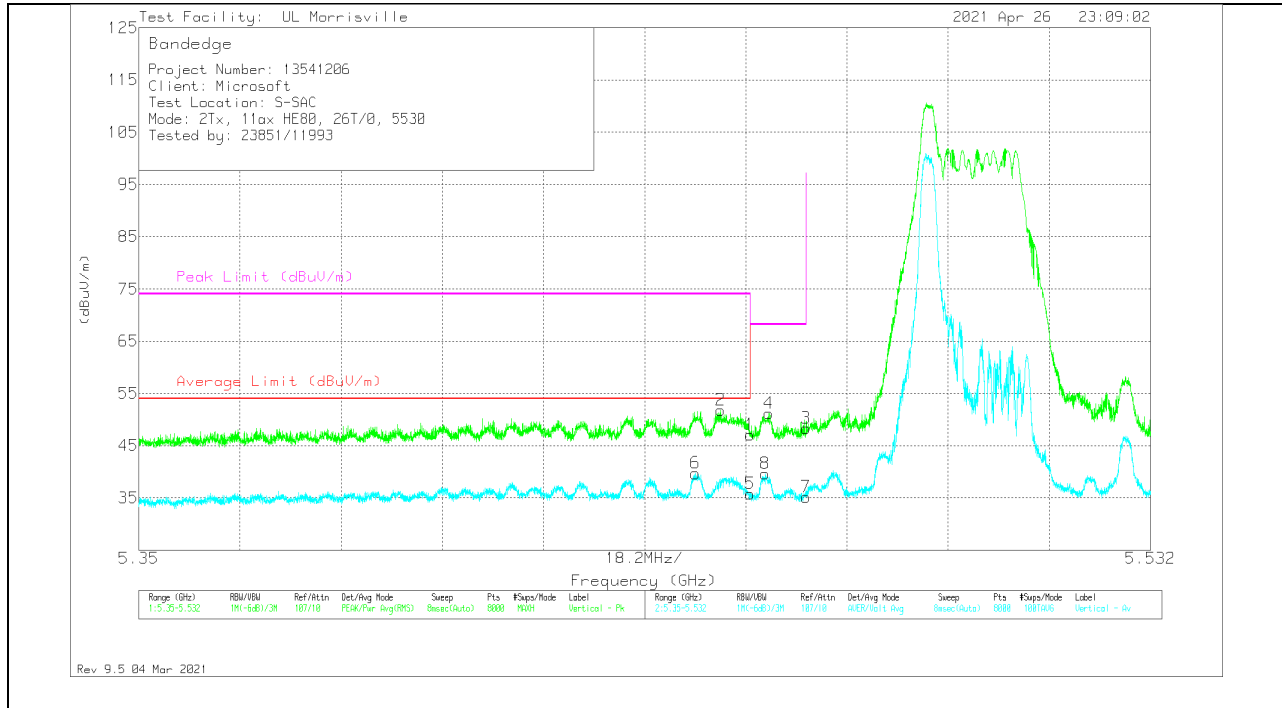

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	36.01	PK	34.5	-23.5	47.01	-	-	74	-26.99	18	313	V
2	*** 5.45464	40.83	PK	34.5	-23.5	51.83	-	-	74	-22.17	18	313	V
5	*** 5.45999	24.71	ADV	34.5	-23.5	35.71	54	-18.29	-	-	18	313	V
6	*** 5.45009	28.58	ADV	34.5	-23.4	39.68	54	-14.32	-	-	18	313	V
8	5.46272	28.56	ADV	34.5	-23.5	39.56	-	-	-	-	18	313	V
4	5.46336	40.2	PK	34.5	-23.5	51.2	-	-	68.2	-17	18	313	V
3	5.47	37.36	PK	34.5	-23.5	48.36	-	-	68.2	-19.84	18	313	V
7	5.47	24.2	ADV	34.5	-23.5	35.2	-	-	-	-	18	313	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

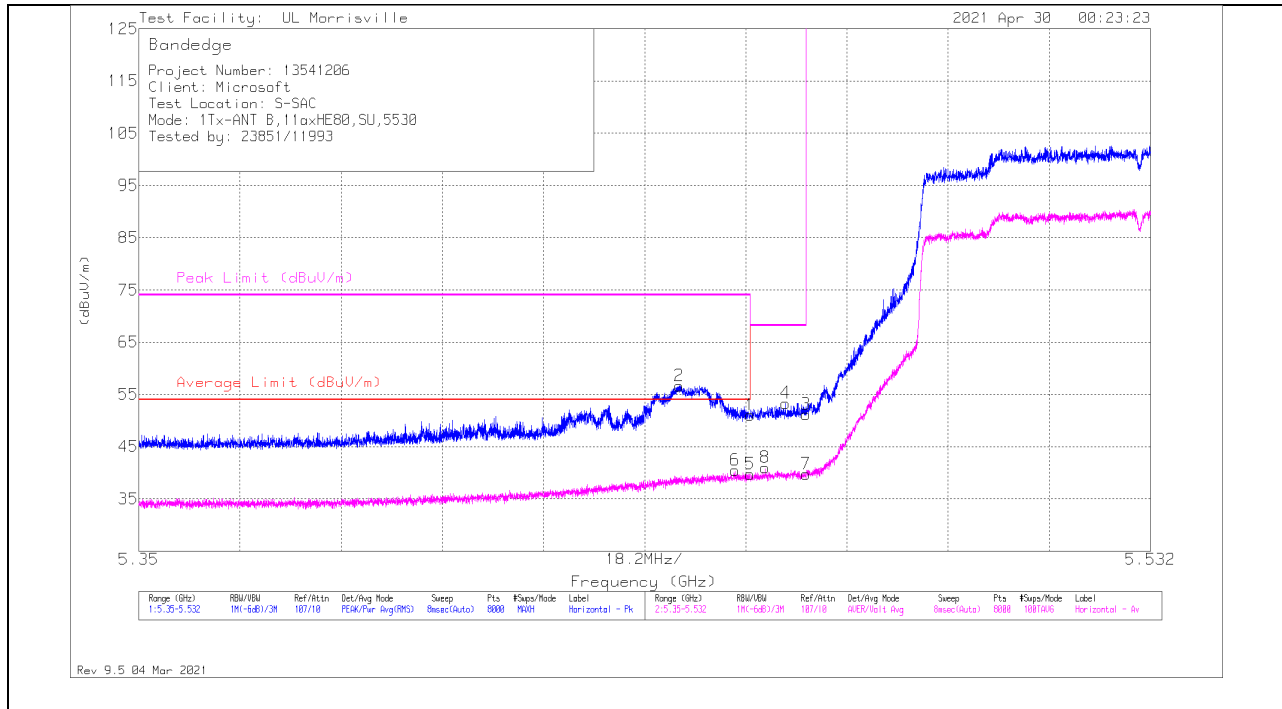

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45999	39.97	Pk	34.6	-23.5	0	51.07	-	-	74	-22.93	48	210	H
2	** * 5.44725	45.47	Pk	34.6	-23.4	0	56.67	-	-	74	-17.33	48	210	H
5	** * 5.45999	28.36	ADV	34.6	-23.5	.24	39.7	54	-14.3	-	-	48	210	H
6	** * 5.45728	29.11	ADV	34.6	-23.5	.24	40.45	54	-13.55	-	-	48	210	H
8	5.4627	29.64	ADV	34.6	-23.5	.24	40.98	-	-	-	-	48	210	H
4	5.46634	42.33	Pk	34.6	-23.6	0	53.33	-	-	68.2	-14.87	48	210	H
3	5.47	40.09	Pk	34.6	-23.5	0	51.19	-	-	68.2	-17.01	48	210	H
7	5.47	28.42	ADV	34.6	-23.5	.24	39.76	-	-	-	-	48	210	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

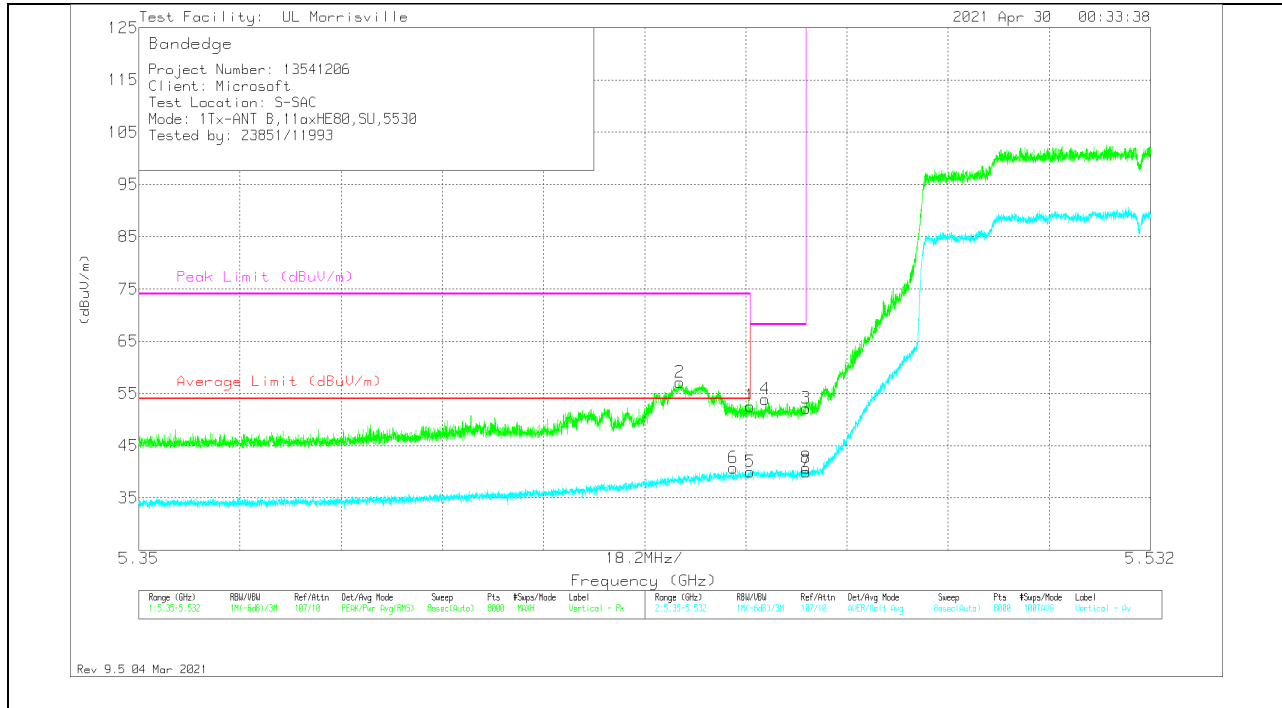

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	41.49	Pk	34.6	-23.5	0	52.59	-	-	74	-21.41	64	205	V
2	* ** 5.44736	45.87	Pk	34.6	-23.4	0	57.07	-	-	74	-16.93	64	205	V
5	* ** 5.45999	28.62	ADV	34.6	-23.5	.24	39.96	54	-14.04	-	-	64	205	V
6	* ** 5.45689	29.37	ADV	34.6	-23.5	.24	40.71	54	-13.29	-	-	64	205	V
4	5.46267	42.81	Pk	34.6	-23.5	0	53.91	-	-	68.2	-14.29	64	205	V
8	5.46998	29.44	ADV	34.6	-23.5	.24	40.78	-	-	-	-	64	205	V
3	5.47	41.11	Pk	34.6	-23.5	0	52.21	-	-	68.2	-15.99	64	205	V
7	5.47	28.62	ADV	34.6	-23.5	.24	39.96	-	-	-	-	64	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

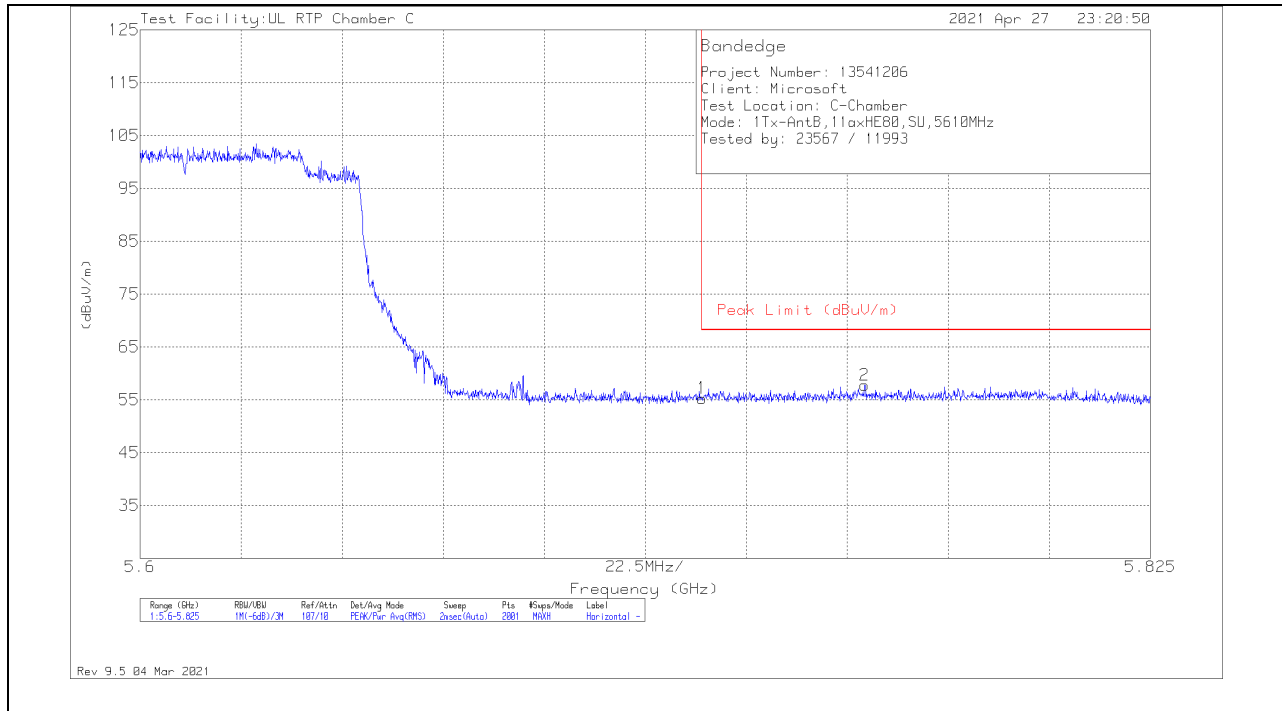

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	33.05	Pk	34.8	-12.6	55.25	68.2	-12.95	221	192	H
2	5.76133	35.35	Pk	34.9	-12.5	57.75	68.2	-10.45	221	192	H

Pk - Peak detector

VERTICAL RESULT

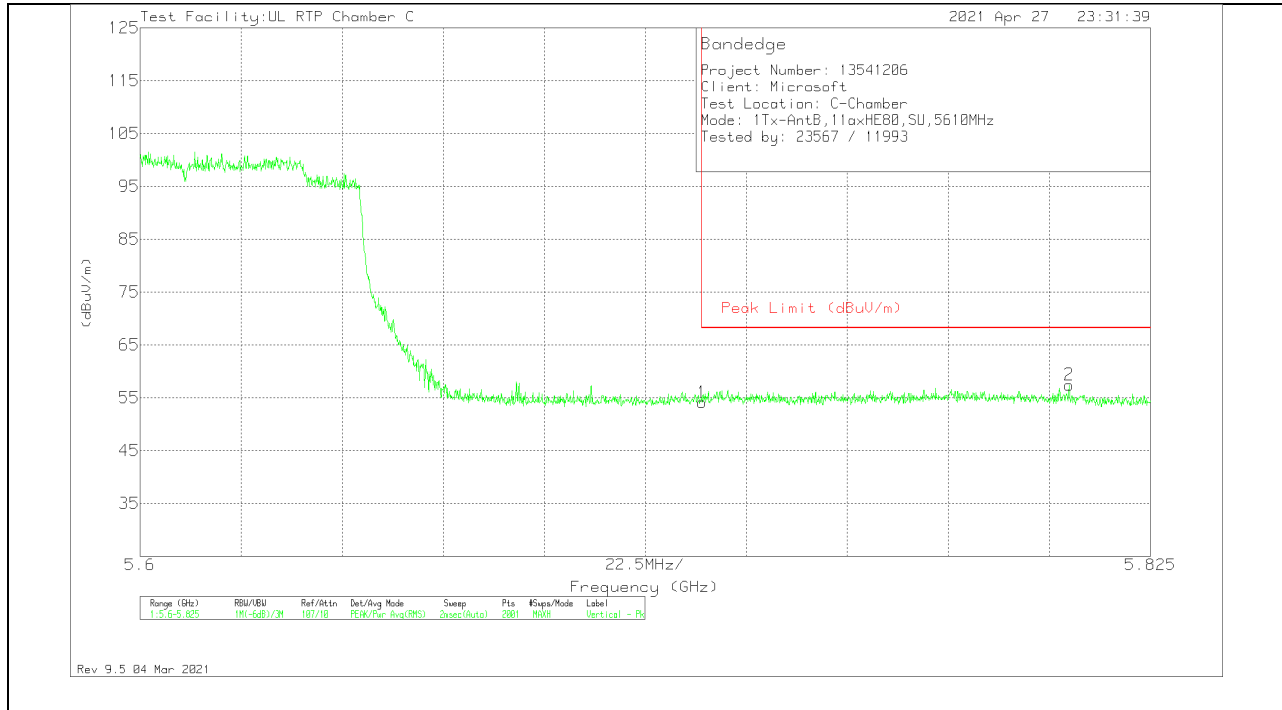


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	31.94	Pk	34.8	-12.6	54.14	68.2	-14.06	193	170	V
2	5.80689	34.62	Pk	35.1	-12.3	57.42	68.2	-10.78	193	170	V

Pk - Peak detector

1TX Antenna 2 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

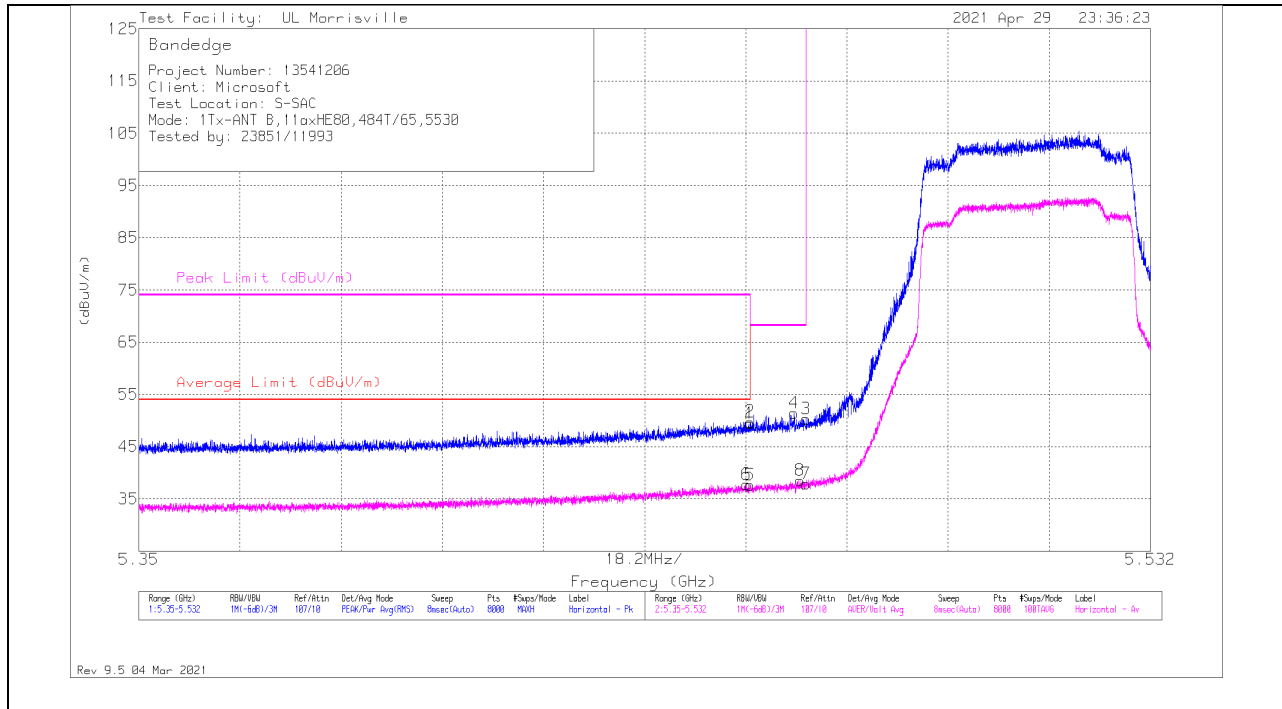

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45999	38.31	Pk	34.6	-23.5	49.41	-	-	74	-24.59	45	178	H
2	** * 5.45997	38.63	Pk	34.6	-23.5	49.73	-	-	74	-24.27	45	178	H
5	** * 5.45999	26.55	ADV	34.6	-23.5	37.65	54	-16.35	-	-	45	178	H
6	** * 5.45928	26.67	ADV	34.6	-23.5	37.77	54	-16.23	-	-	45	178	H
4	5.46791	40.42	Pk	34.6	-23.6	51.42	-	-	68.2	-16.78	45	178	H
8	5.46893	27.42	ADV	34.6	-23.5	38.52	-	-	-	-	45	178	H
3	5.47	39.24	PK	34.6	-23.5	50.34	-	-	68.2	-17.86	45	178	H
7	5.47	26.73	ADV	34.6	-23.5	37.83	-	-	-	-	45	178	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

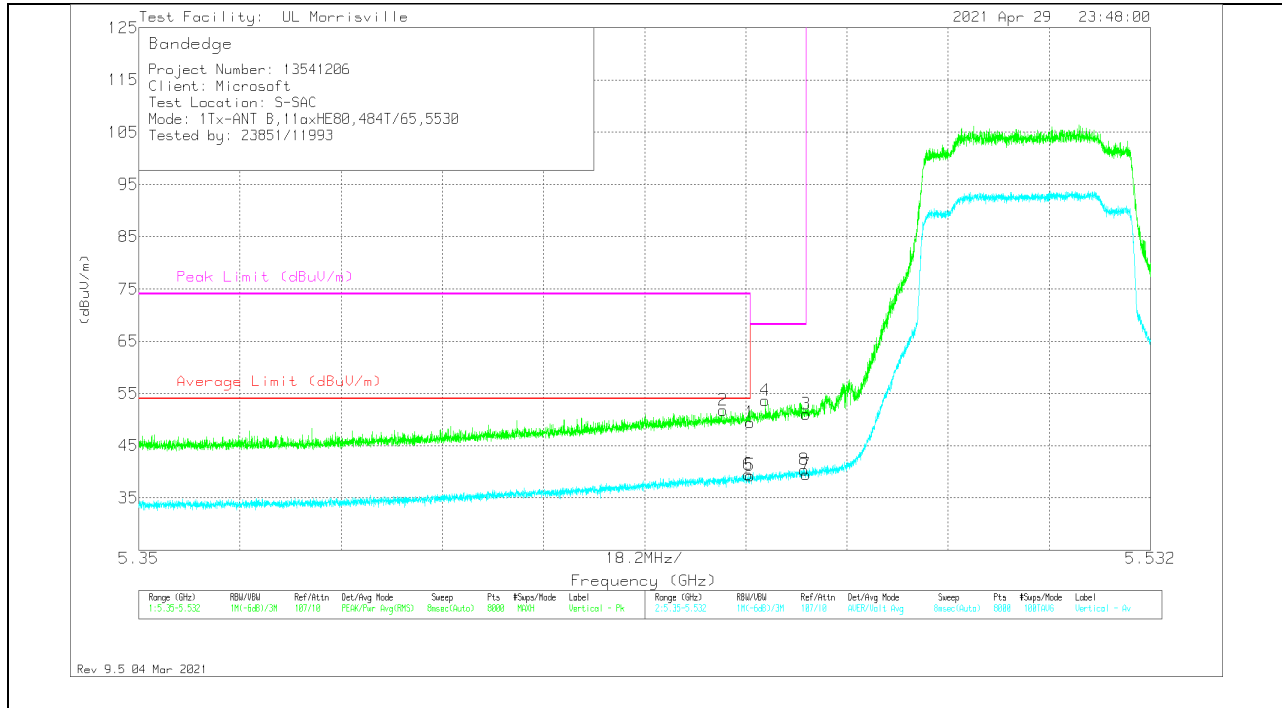

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	38.32	Pk	34.6	-23.5	49.42	-	-	74	-24.58	41	195	V
2	*** 5.45507	40.69	Pk	34.6	-23.5	51.79	-	-	74	-22.21	41	195	V
5	*** 5.45999	28.2	ADV	34.6	-23.5	39.3	54	-14.7	-	-	41	195	V
6	*** 5.45965	28.4	ADV	34.6	-23.5	39.5	54	-14.5	-	-	41	195	V
4	5.46272	42.52	Pk	34.6	-23.5	53.62	-	-	68.2	-14.58	41	195	V
8	5.46975	29.27	ADV	34.6	-23.5	40.37	-	-	-	-	41	195	V
3	5.47	39.94	Pk	34.6	-23.5	51.04	-	-	68.2	-17.16	41	195	V
7	5.47	28.38	ADV	34.6	-23.5	39.48	-	-	-	-	41	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 2 OFDMA MODE: 484-Tones, RU Index 66

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

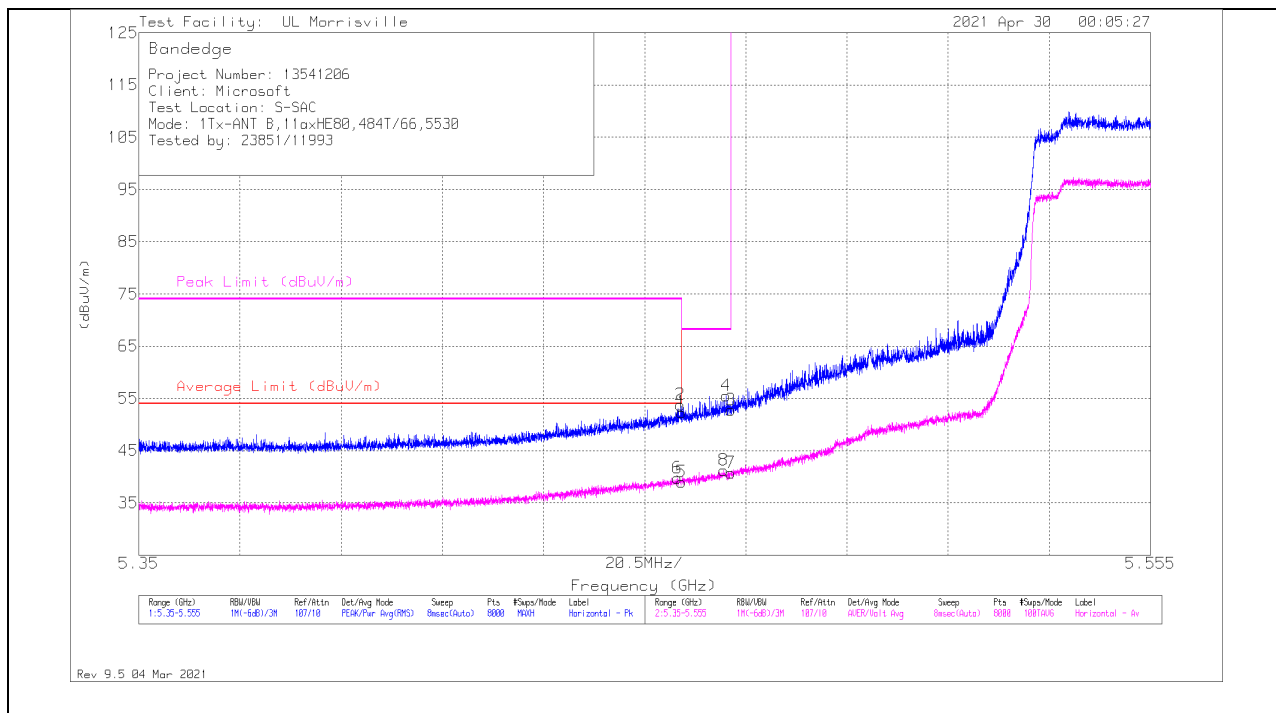

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.46	41.24	Pk	34.6	-23.5	52.34	-	-	74	-21.66	57	216	H
2	*** 5.45971	42.65	Pk	34.6	-23.5	53.75	-	-	74	-20.25	57	216	H
5	*** 5.46	27.95	ADV	34.6	-23.5	39.05	54	-14.95	-	-	57	216	H
6	*** 5.45915	28.65	ADV	34.6	-23.5	39.75	54	-14.25	-	-	57	216	H
8	5.46848	30.18	ADV	34.6	-23.6	41.18	-	-	-	-	57	216	H
4	5.46902	44.44	PK	34.6	-23.5	55.54	-	-	68.2	-12.66	57	216	H
3	5.46999	41.62	PK	34.6	-23.5	52.72	-	-	68.2	-15.48	57	216	H
7	5.46999	29.68	ADV	34.6	-23.5	40.78	-	-	-	-	57	216	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

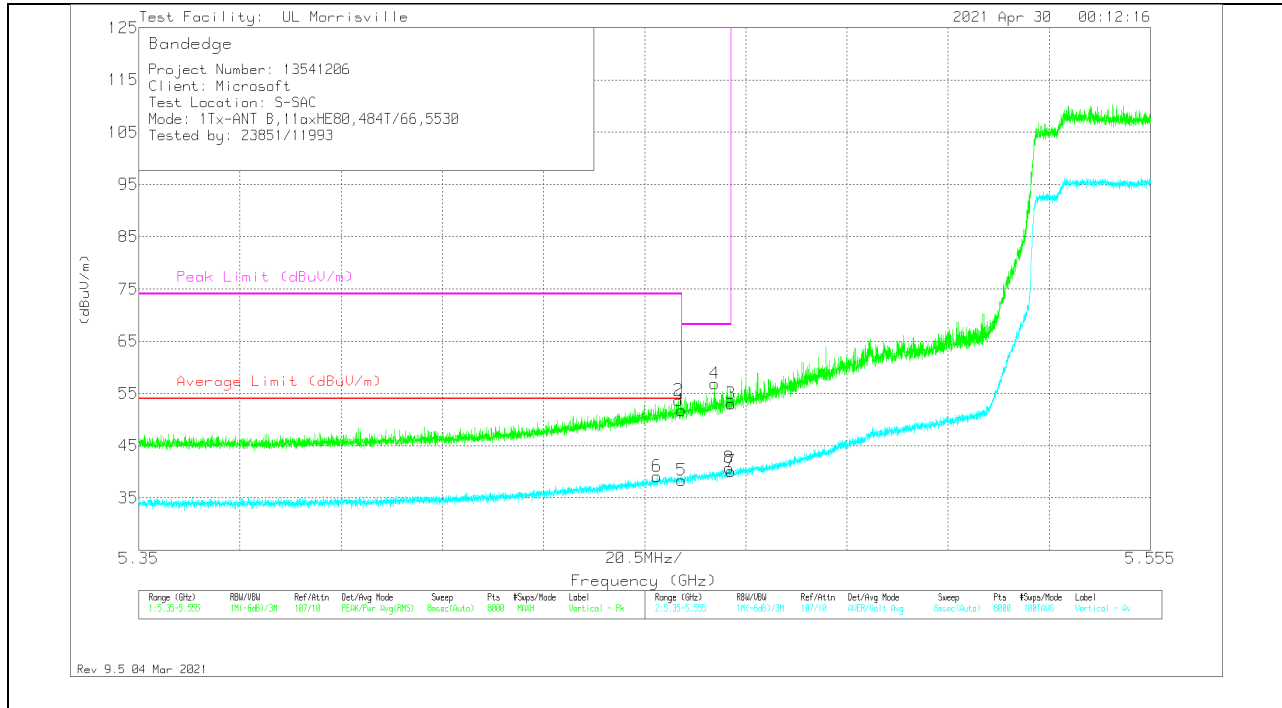

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.46	40.66	PK	34.6	-23.5	51.76	-	-	74	-22.24	57	216	V
2	*** 5.45938	42.58	PK	34.6	-23.5	53.68	-	-	74	-20.32	57	216	V
5	*** 5.46	27.29	ADV	34.6	-23.5	38.39	54	-15.61	-	-	57	216	V
6	*** 5.45502	28.05	ADV	34.6	-23.5	39.15	54	-14.85	-	-	57	216	V
4	5.46674	45.85	PK	34.6	-23.6	56.85	-	-	68.2	-11.35	57	216	V
8	5.46958	29.64	ADV	34.6	-23.5	40.74	-	-	-	-	57	216	V
3	5.46999	41.97	PK	34.6	-23.5	53.07	-	-	68.2	-15.13	57	216	V
7	5.46999	29.01	ADV	34.6	-23.5	40.11	-	-	-	-	57	216	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 2 OFDMA MODE: 242-Tones, RU Index 61

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

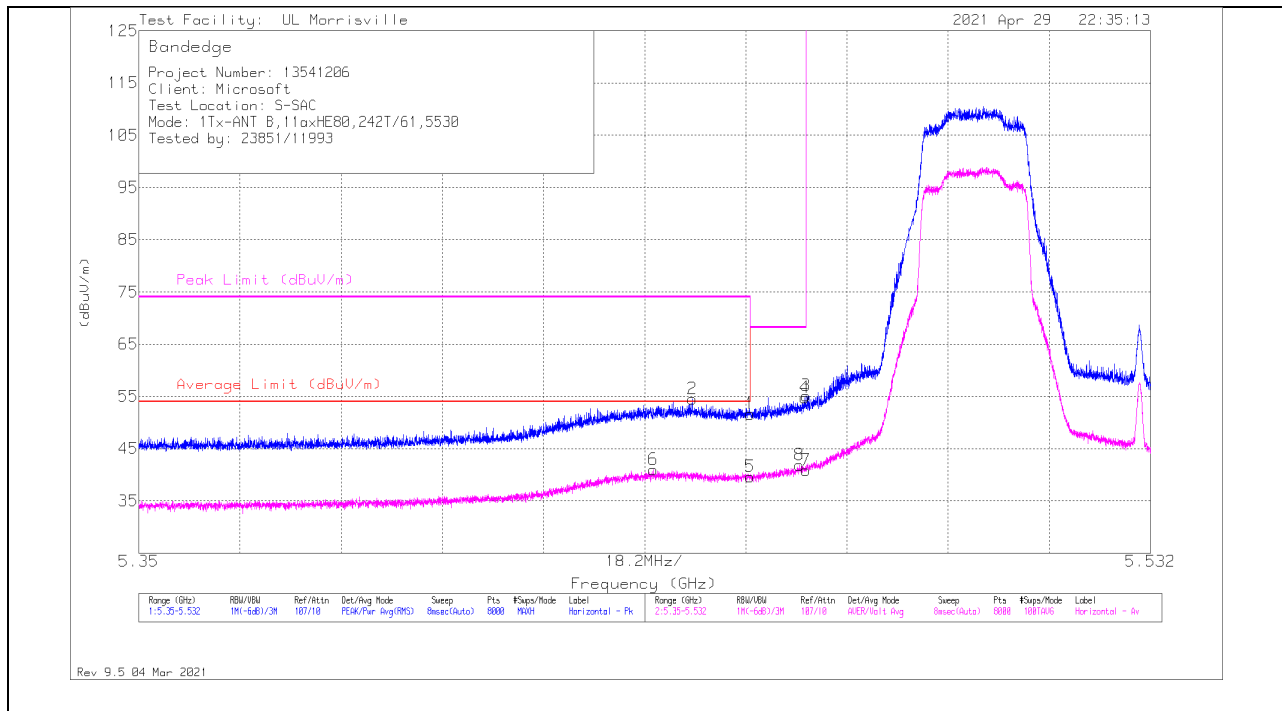

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45999	40.5	Pk	34.6	-23.5	51.6	-	-	74	-22.4	41	208	H
2	** * 5.44957	43.27	Pk	34.6	-23.4	54.47	-	-	74	-19.53	41	208	H
5	** * 5.45999	28.53	ADV	34.6	-23.5	39.63	54	-14.37	-	-	41	208	H
6	** * 5.44258	29.85	ADV	34.6	-23.5	40.95	54	-13.05	-	-	41	208	H
8	5.46888	30.7	ADV	34.6	-23.5	41.8	-	-	-	-	41	208	H
4	5.46979	43.71	Pk	34.6	-23.5	54.81	-	-	68.2	-13.39	41	208	H
3	5.47	43.99	Pk	34.6	-23.5	55.09	-	-	68.2	-13.11	41	208	H
7	5.47	29.81	ADV	34.6	-23.5	40.91	-	-	-	-	41	208	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

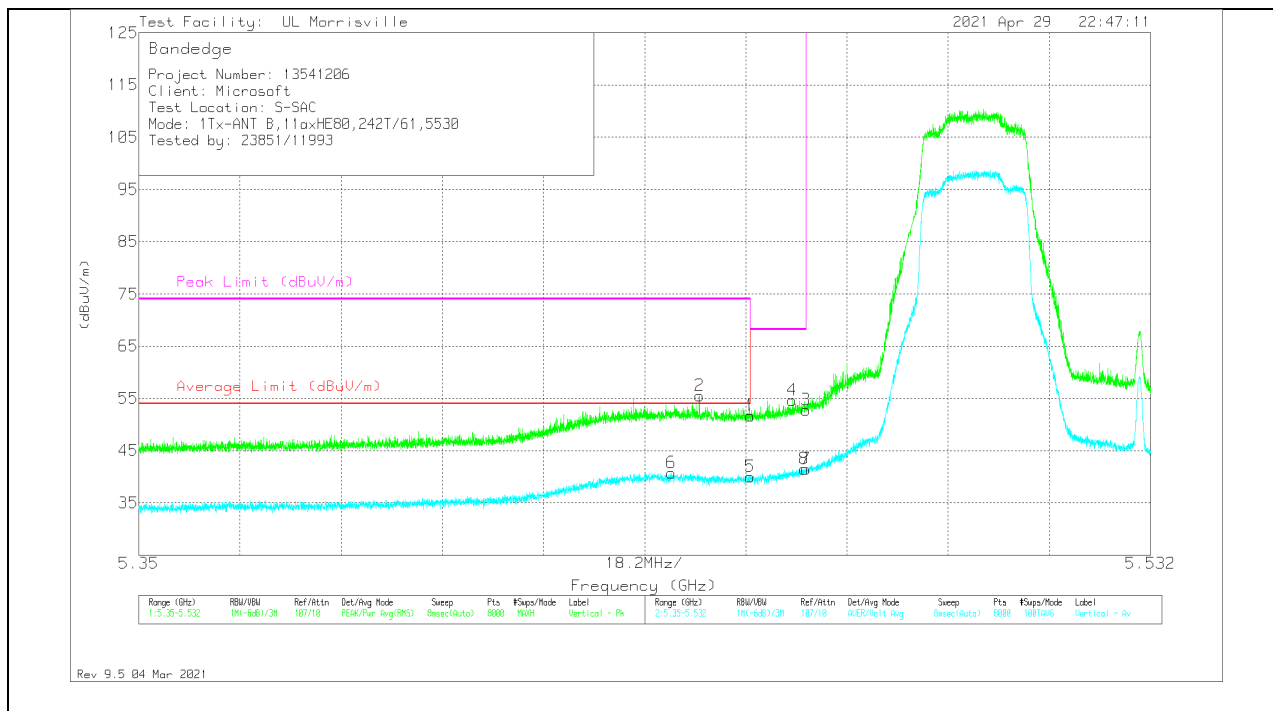

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	40.55	PK	34.6	-23.5	51.65	-	-	74	-22.35	63	214	V
2	*** 5.45084	44.36	PK	34.6	-23.4	55.56	-	-	74	-18.44	63	214	V
5	*** 5.45999	28.83	ADV	34.6	-23.5	39.93	54	-14.07	-	-	63	214	V
6	*** 5.44584	29.5	ADV	34.6	-23.4	40.7	54	-13.3	-	-	63	214	V
4	5.46754	43.63	PK	34.6	-23.6	54.63	-	-	68.2	-13.57	63	214	V
8	5.4697	30.37	ADV	34.6	-23.5	41.47	-	-	-	-	63	214	V
3	5.47	41.68	PK	34.6	-23.5	52.78	-	-	68.2	-15.42	63	214	V
7	5.47	30.39	ADV	34.6	-23.5	41.49	-	-	-	-	63	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 2 OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

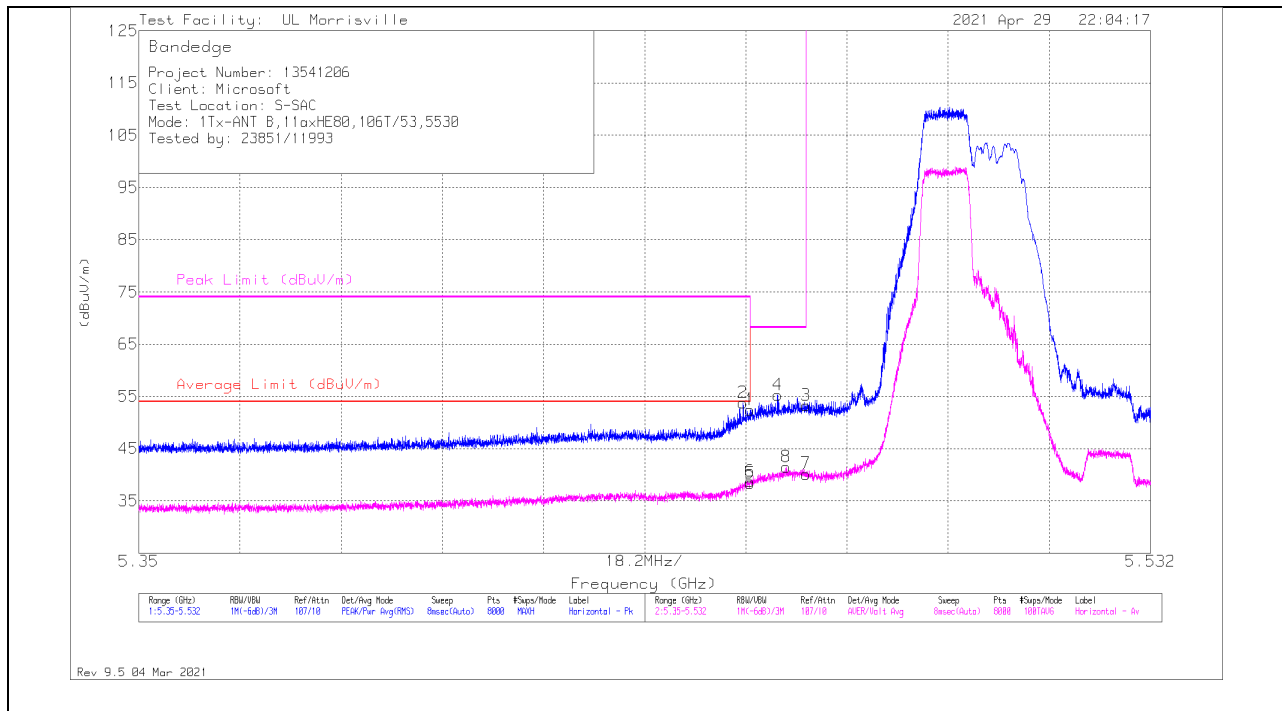

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45999	41.36	Pk	34.6	-23.5	52.46	-	-	74	-21.54	357	110	H
2	** * 5.45867	42.64	Pk	34.6	-23.5	53.74	-	-	74	-20.26	357	110	H
5	** * 5.45999	27.23	ADV	34.6	-23.5	38.33	54	-15.67	-	-	357	110	H
6	** * 5.45997	27.7	ADV	34.6	-23.5	38.8	54	-15.2	-	-	357	110	H
4	5.4649	44.17	Pk	34.6	-23.5	55.27	-	-	68.2	-12.93	357	110	H
8	5.4665	30.46	ADV	34.6	-23.6	41.46	-	-	-	-	357	110	H
3	5.47	42.22	PK	34.6	-23.5	53.32	-	-	68.2	-14.88	357	110	H
7	5.47	29.07	ADV	34.6	-23.5	40.17	-	-	-	-	357	110	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

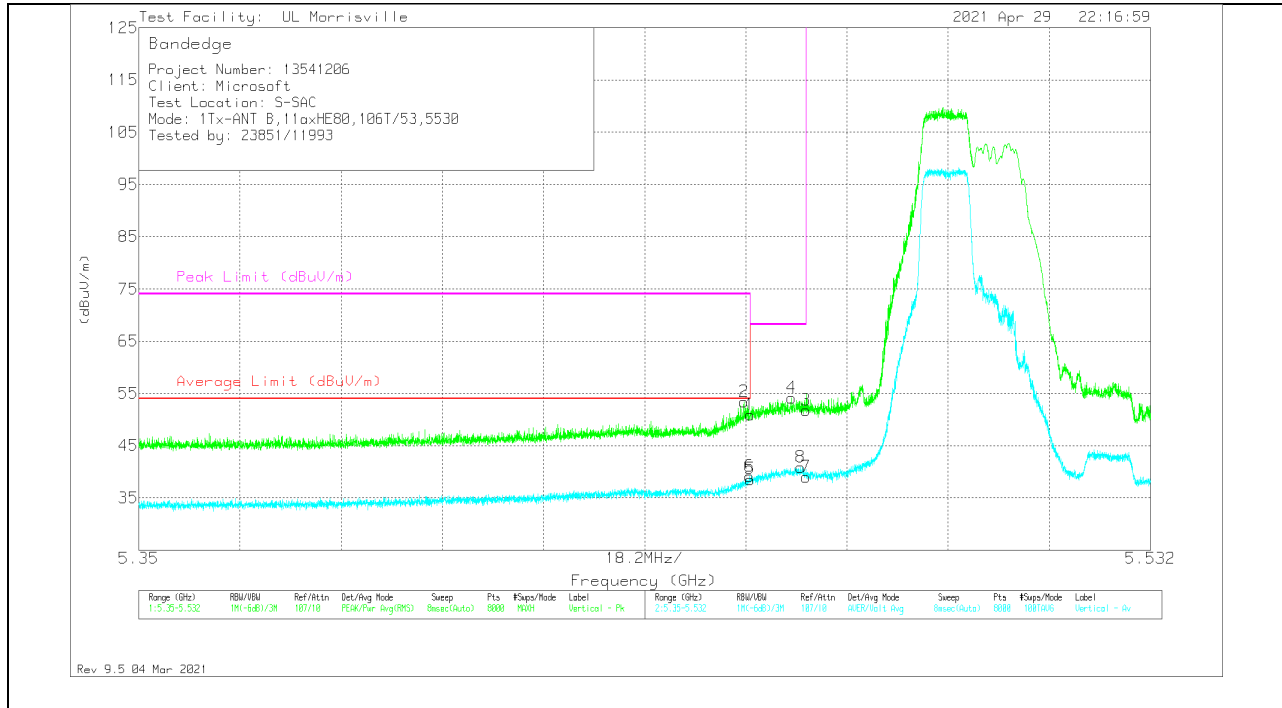

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	39.8	Pk	34.6	-23.5	50.9	-	-	74	-23.1	75	180	V
2	*** 5.4589	42.33	Pk	34.6	-23.5	53.43	-	-	74	-20.57	75	180	V
5	*** 5.45999	27.46	ADV	34.6	-23.5	38.56	54	-15.44	-	-	75	180	V
6	*** 5.4599	28.03	ADV	34.6	-23.5	39.13	54	-14.87	-	-	75	180	V
4	5.46743	43.19	Pk	34.6	-23.6	54.19	-	-	68.2	-14.01	75	180	V
8	5.46904	29.76	ADV	34.6	-23.5	40.86	-	-	-	-	75	180	V
3	5.47	40.67	Pk	34.6	-23.5	51.77	-	-	68.2	-16.43	75	180	V
7	5.47	27.9	ADV	34.6	-23.5	39	-	-	-	-	75	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

10.1.2. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.6GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (HIGH CHANNEL 136)


HORIZONTAL RESULT

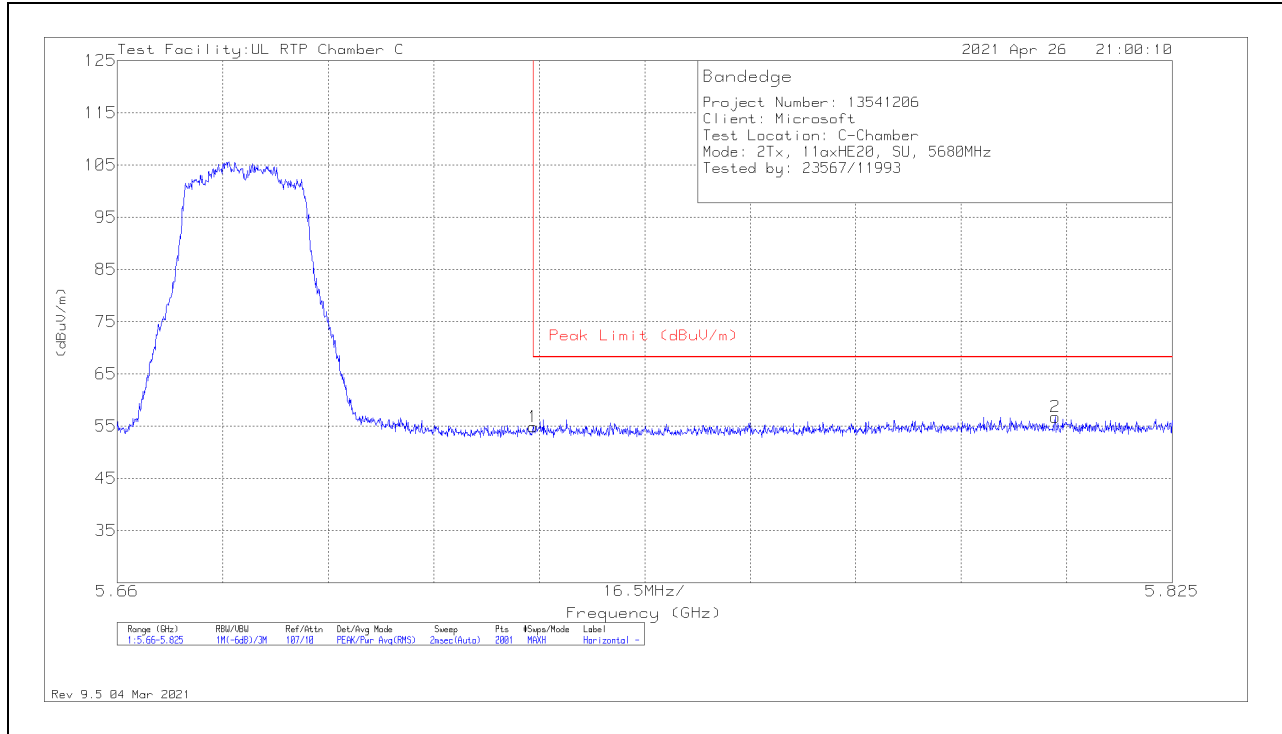

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	32.66	Pk	34.8	-12.6	54.86	68.2	-13.34	46	240	H
2	5.80669	33.95	Pk	35.1	-12.3	56.75	68.2	-11.45	46	240	H

Pk - Peak detector

VERTICAL RESULT

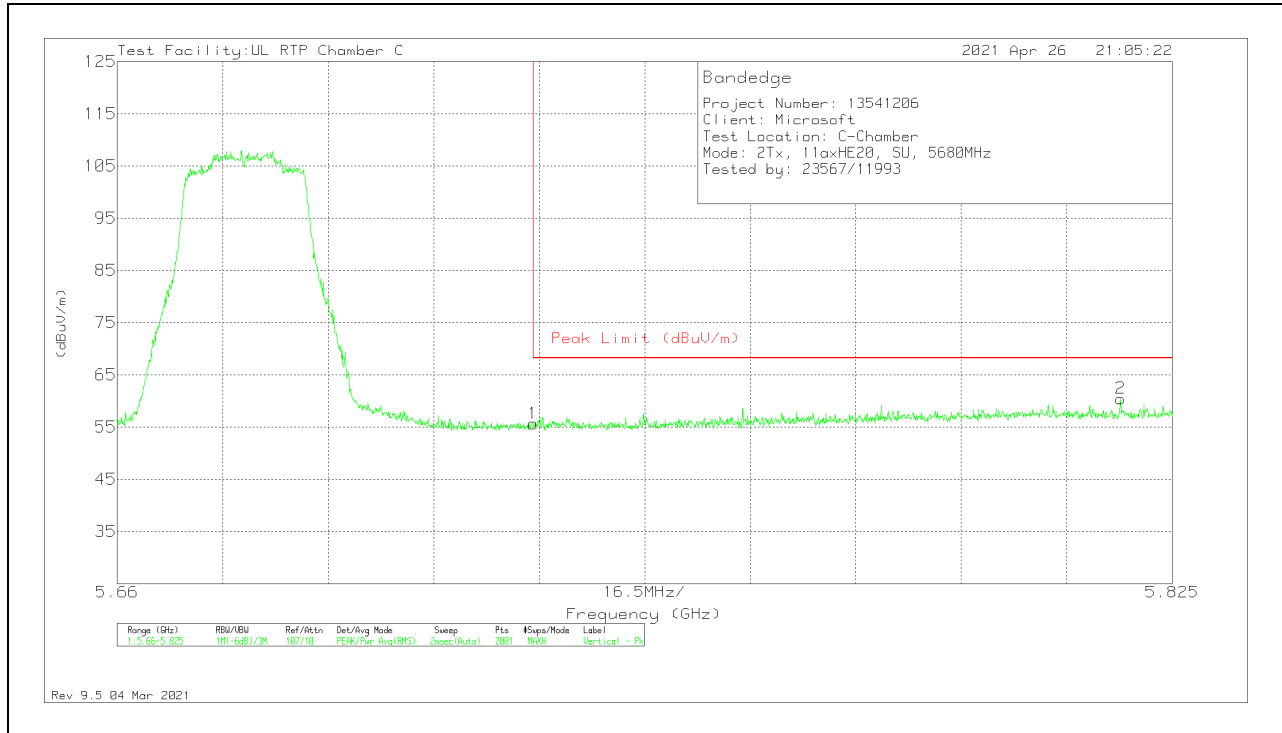


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.47	Pk	34.8	-12.6	55.67	68.2	-12.53	16	238	V
2	5.81692	37.86	Pk	35.1	-12.5	60.46	68.2	-7.74	16	238	V

Pk - Peak detector

BANEDGE (HIGH CHANNEL 140)


HORIZONTAL RESULT

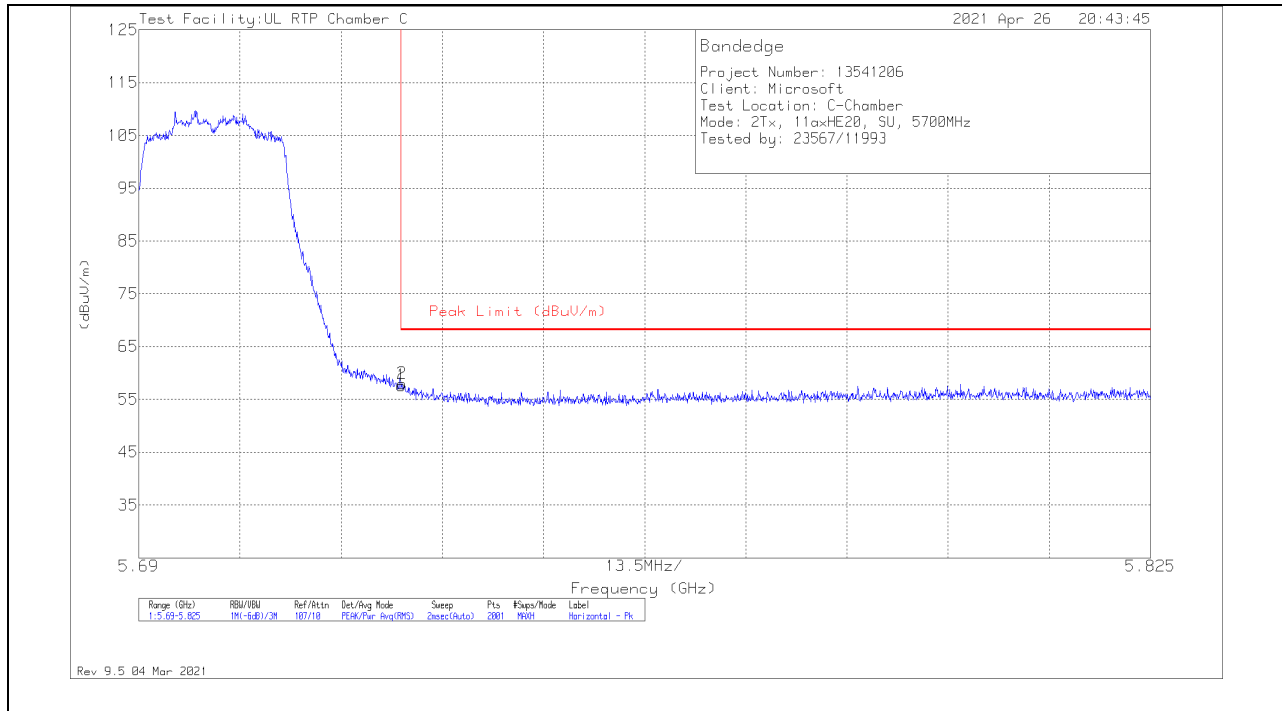

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	35.39	Pk	34.8	-12.6	57.59	68.2	-10.61	19	276	H
2	5.7251	35.79	Pk	34.8	-12.6	57.99	68.2	-10.21	19	276	H

Pk - Peak detector

VERTICAL RESULT

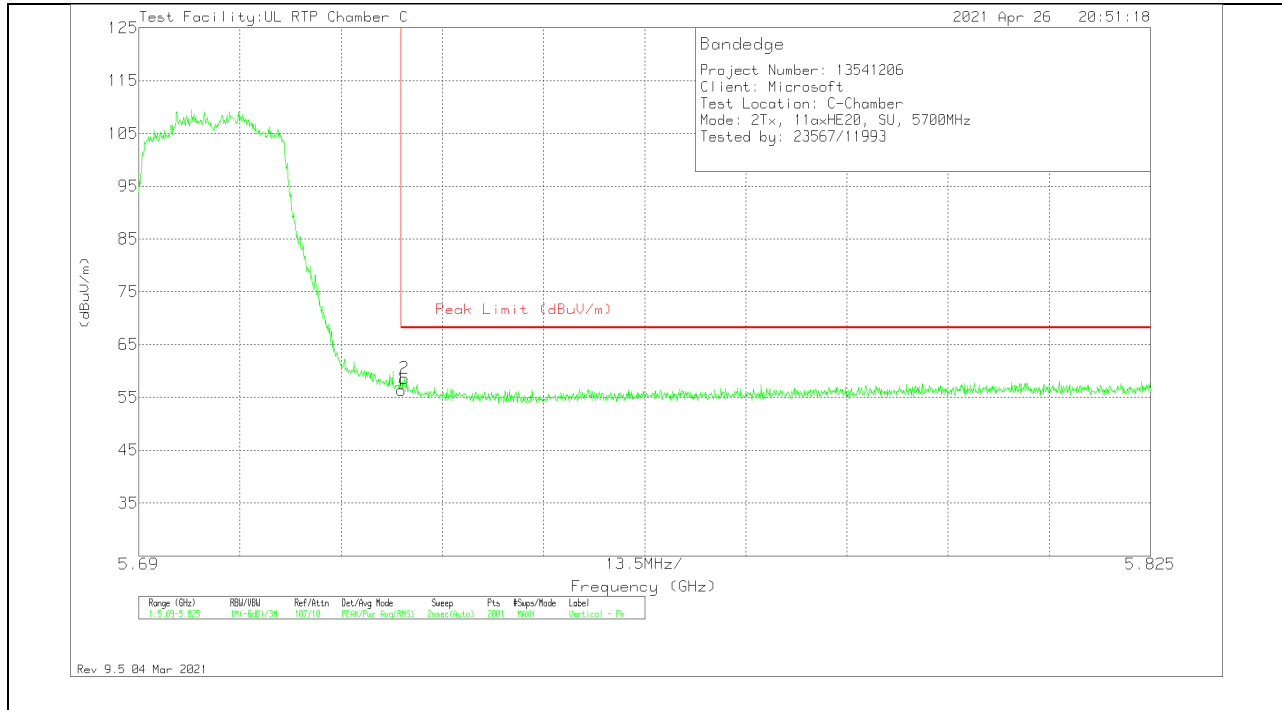


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	34.24	Pk	34.8	-12.6	56.44	68.2	-11.76	11	380	V
2	5.72544	36.38	Pk	34.8	-12.6	58.58	68.2	-9.62	11	380	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

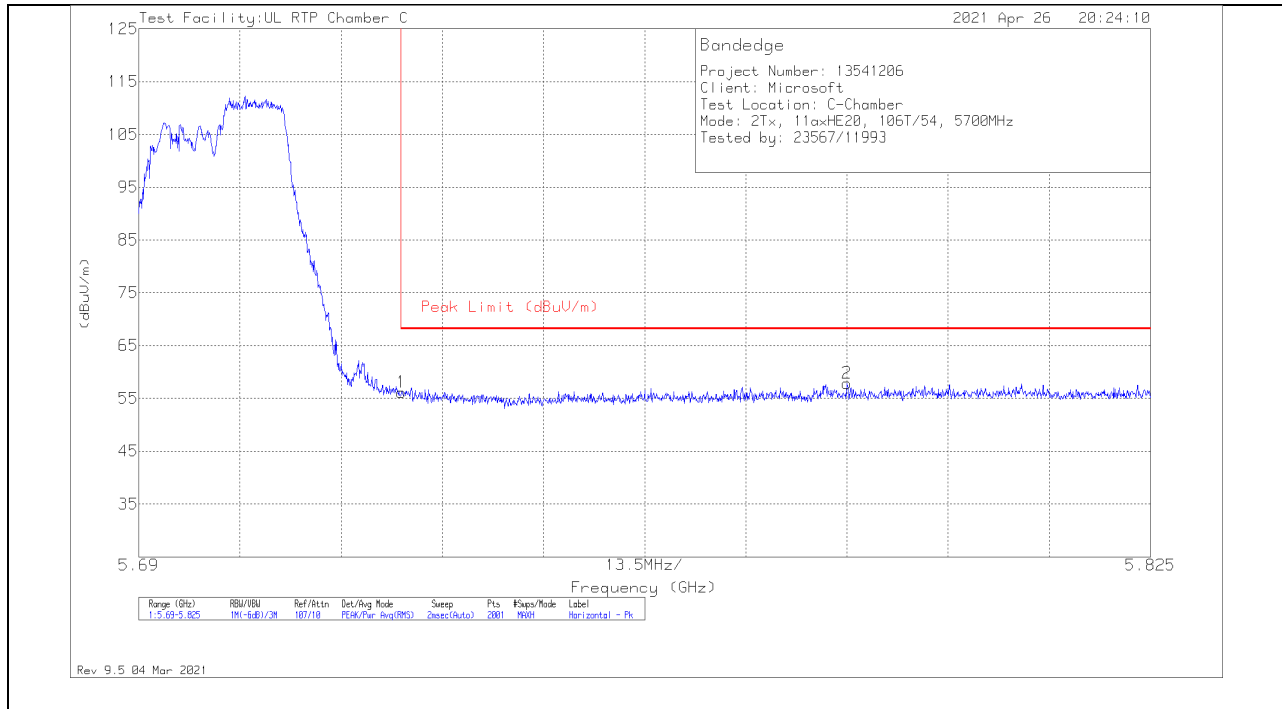

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	33.97	Pk	34.8	-12.6	56.17	68.2	-12.03	24	152	H
2	5.7845	35.16	Pk	35	-12.3	57.86	68.2	-10.34	24	152	H

Pk - Peak detector

VERTICAL RESULT

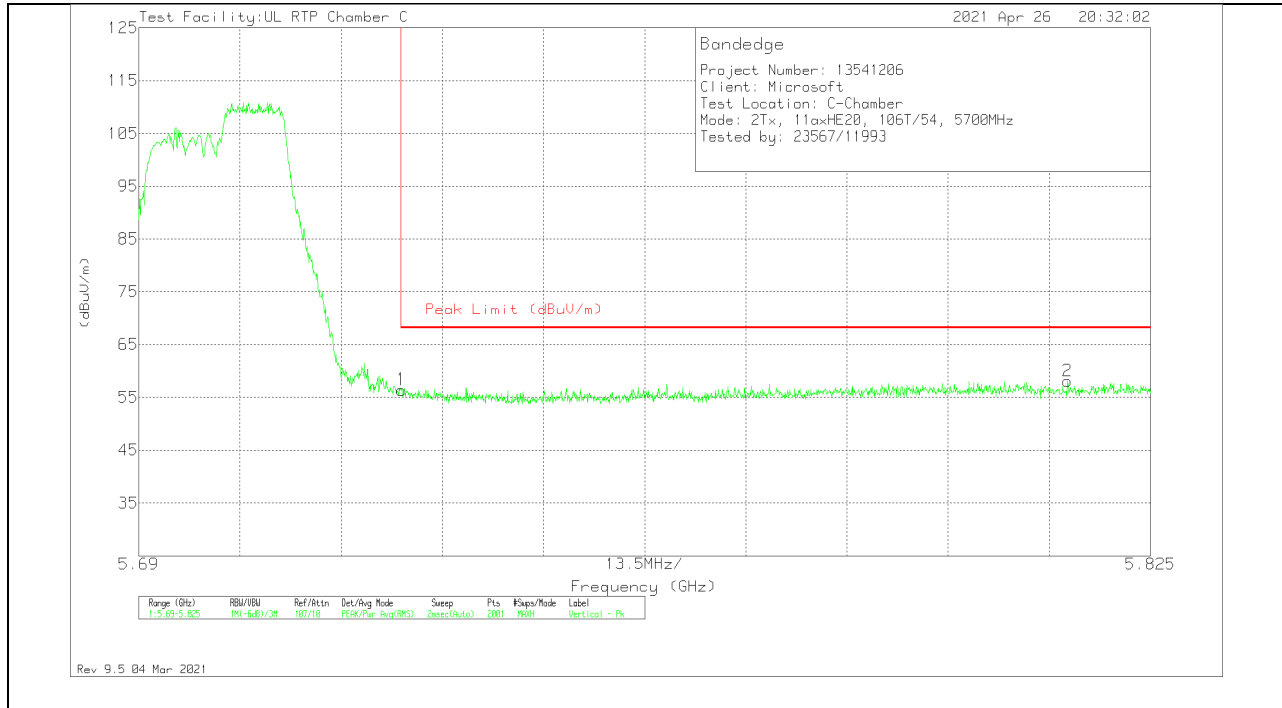


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	34.24	Pk	34.8	-12.6	56.44	68.2	-11.76	20	245	V
2	5.81393	35.45	Pk	35.1	-12.5	58.05	68.2	-10.15	20	245	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE: 52-Tones, RU Index 40

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

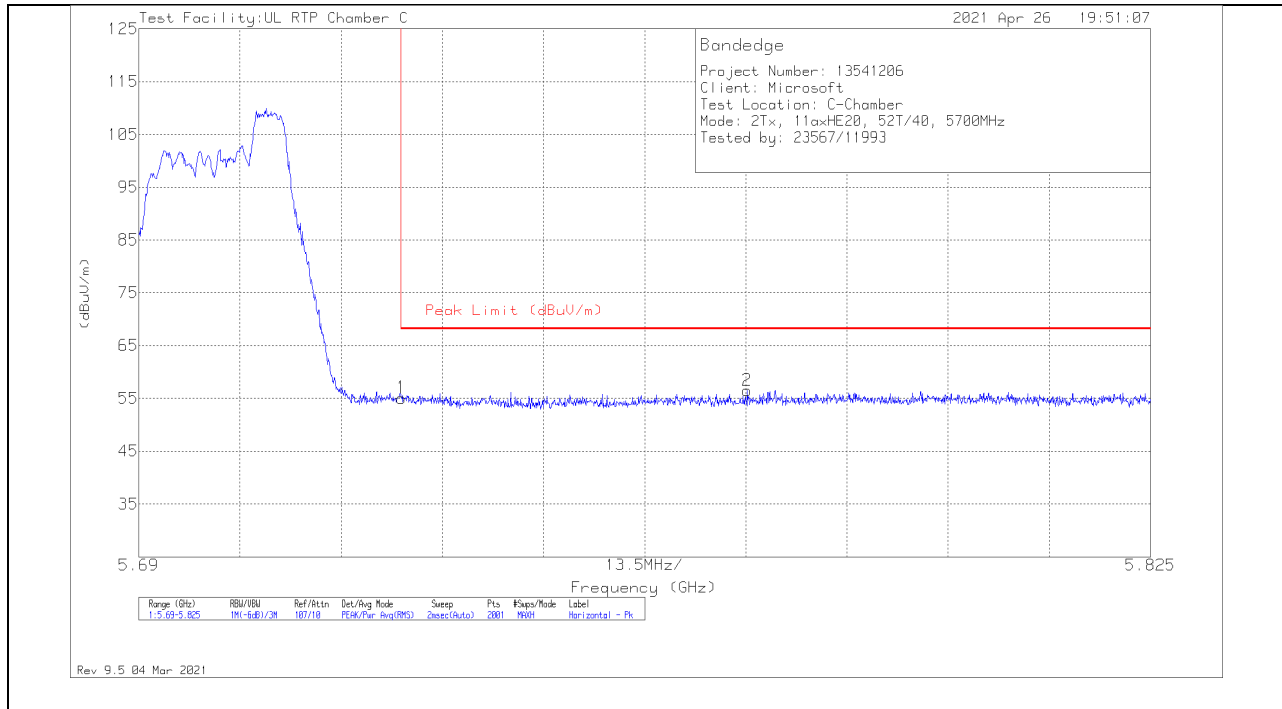

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	32.89	Pk	34.8	-12.6	55.09	68.2	-13.11	352	224	H
2	5.7712	34.12	Pk	34.9	-12.5	56.52	68.2	-11.68	352	224	H

Pk - Peak detector

VERTICAL RESULT

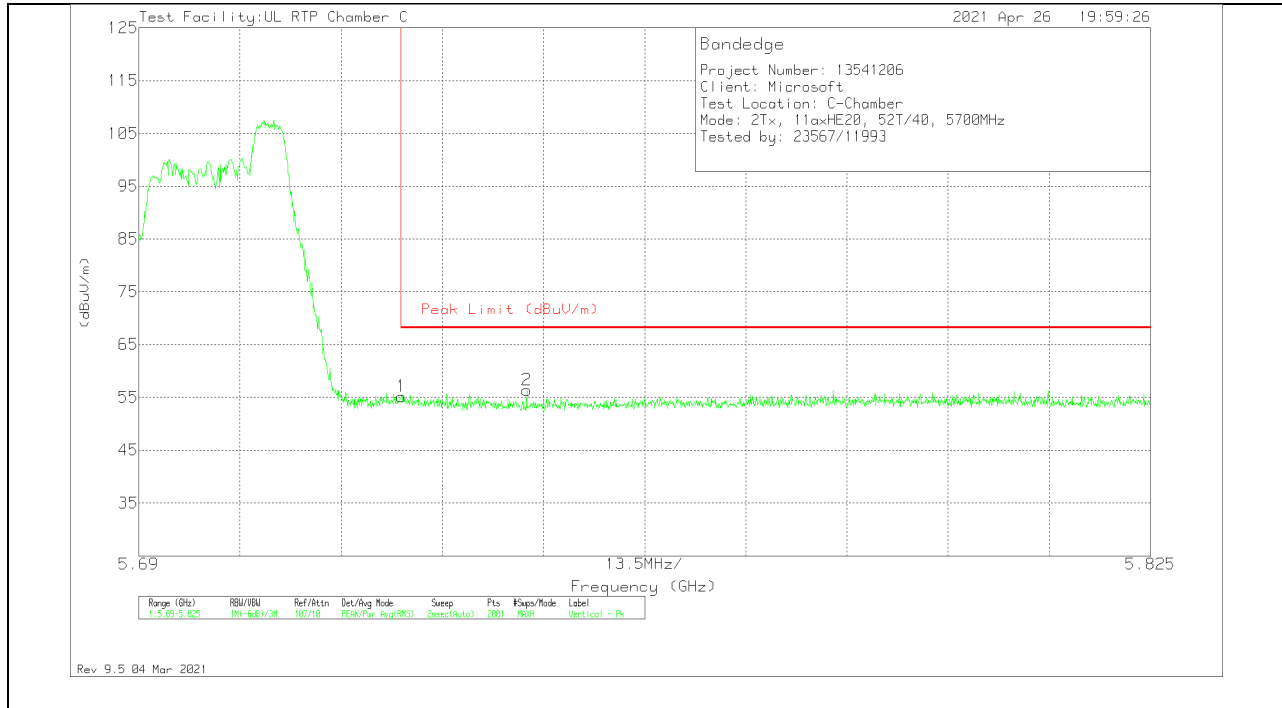


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	32.9	Pk	34.8	-12.6	55.1	68.2	-13.1	50	314	V
2	5.74177	34.43	Pk	34.8	-12.9	56.33	68.2	-11.87	50	314	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

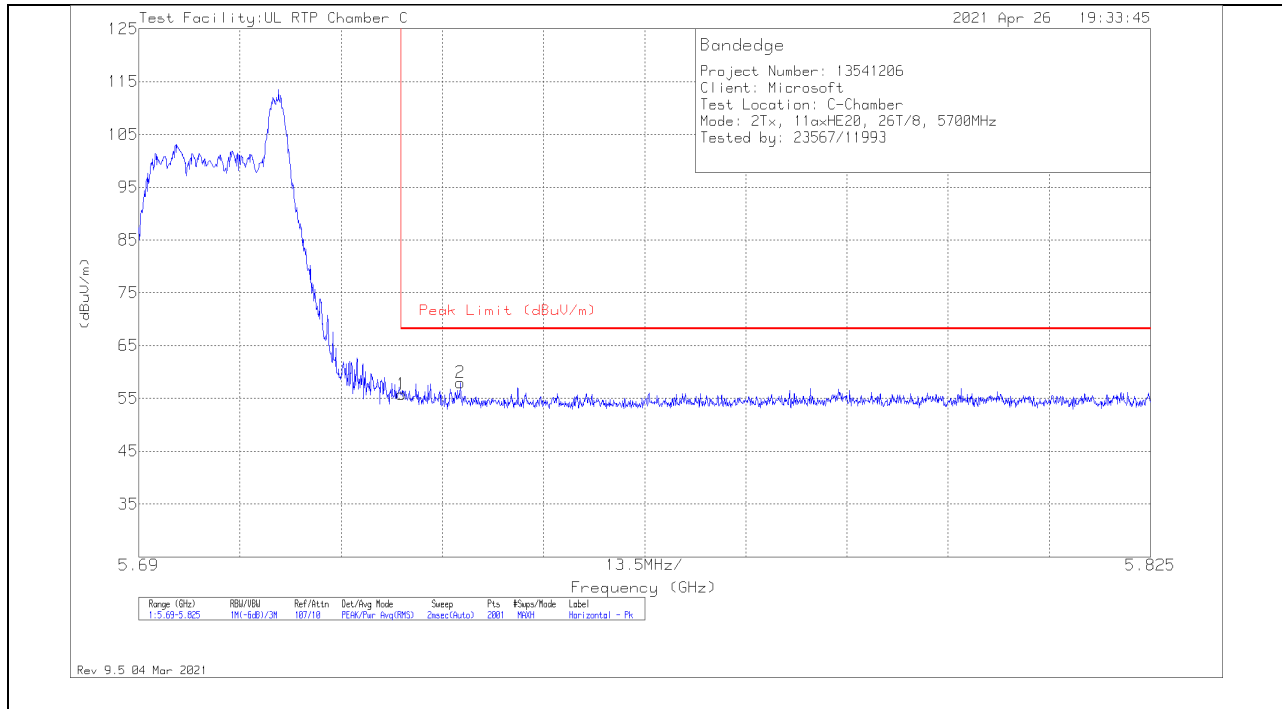

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	33.52	Pk	34.8	-12.6	55.72	68.2	-12.48	19	215	H
2	5.73293	35.84	Pk	34.8	-12.7	57.94	68.2	-10.26	19	215	H

Pk - Peak detector

VERTICAL RESULT

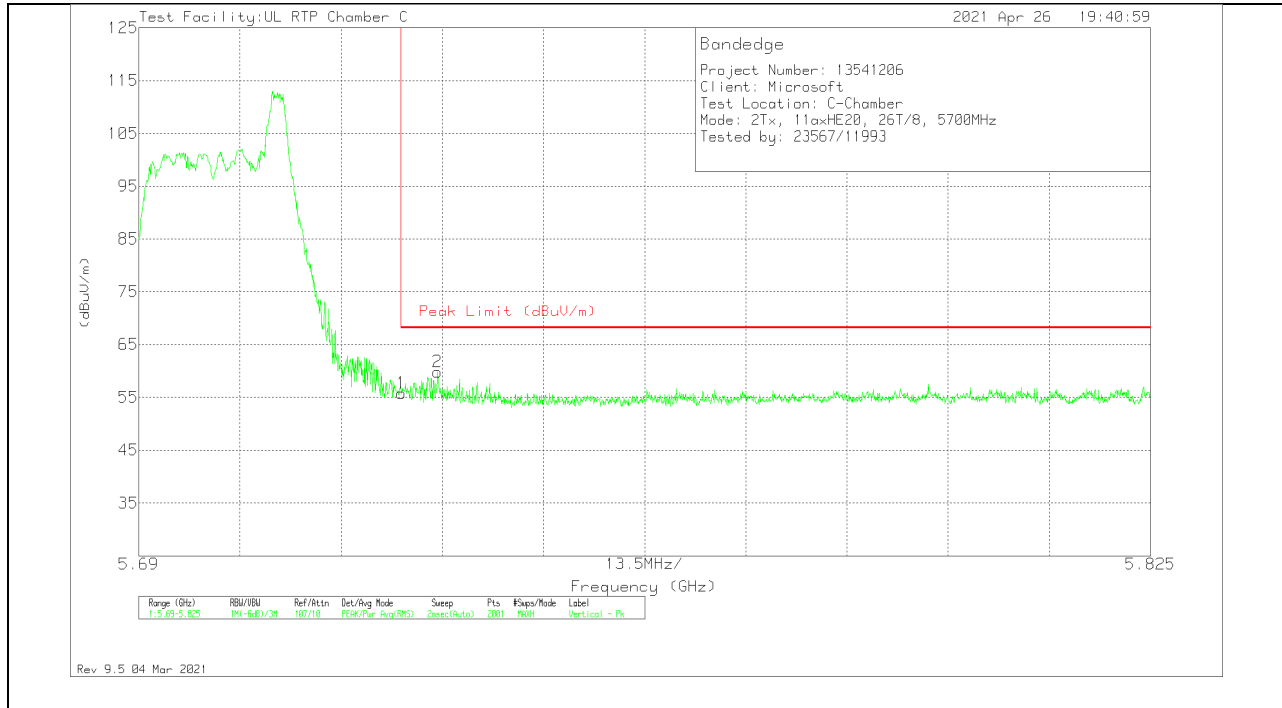


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	33.52	Pk	34.8	-12.6	55.72	68.2	-12.48	17	248	V
2	5.72989	37.58	Pk	34.8	-12.6	59.78	68.2	-8.42	17	248	V

Pk - Peak detector

1TX Antenna 1 OFDMA MODE: SU, Single User

BANDEDGE (HIGH CHANNEL 136)


HORIZONTAL RESULT

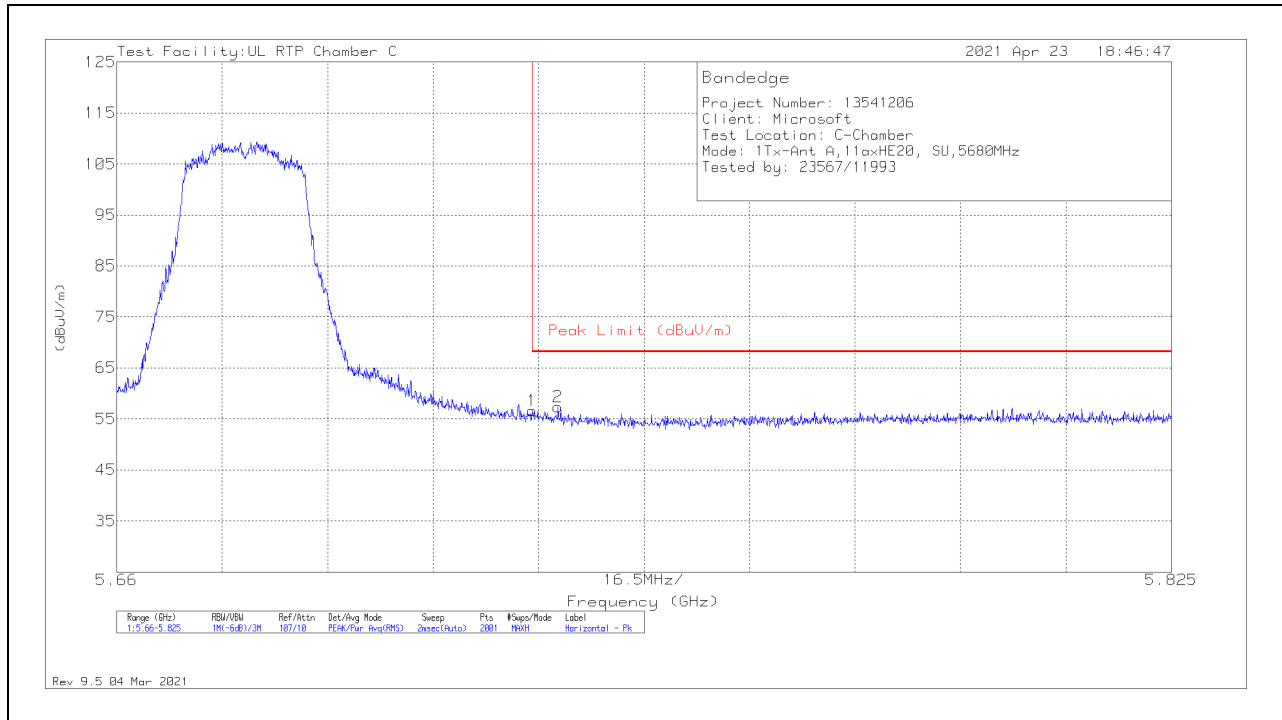

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	34.4	Pk	34.8	-12.6	56.6	68.2	-11.6	202	328	H
2	5.72905	35.2	Pk	34.8	-12.6	57.4	68.2	-10.8	202	328	H

Pk - Peak detector

VERTICAL RESULT

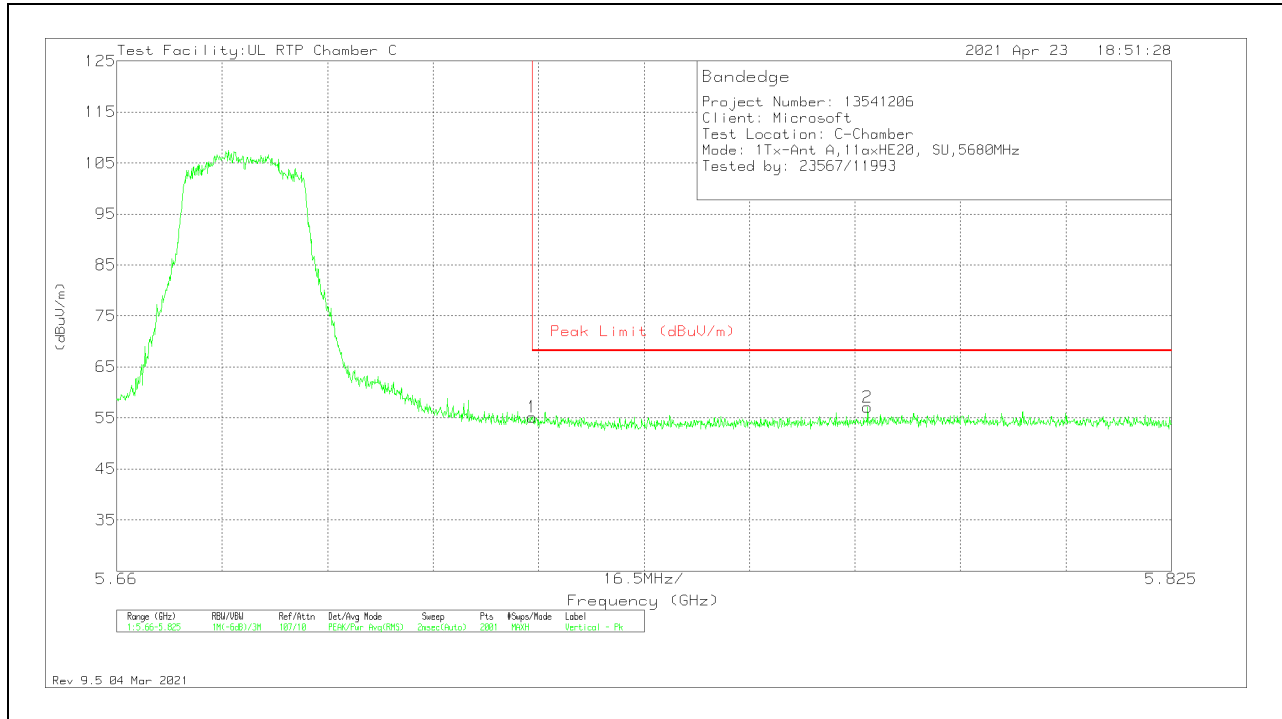


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.01	Pk	34.8	-12.6	55.21	68.2	-12.99	179	200	V
2	5.77748	34.55	Pk	35	-12.4	57.15	68.2	-11.05	179	200	V

Pk - Peak detector

BANEDGE (HIGH CHANNEL 140)


HORIZONTAL RESULT

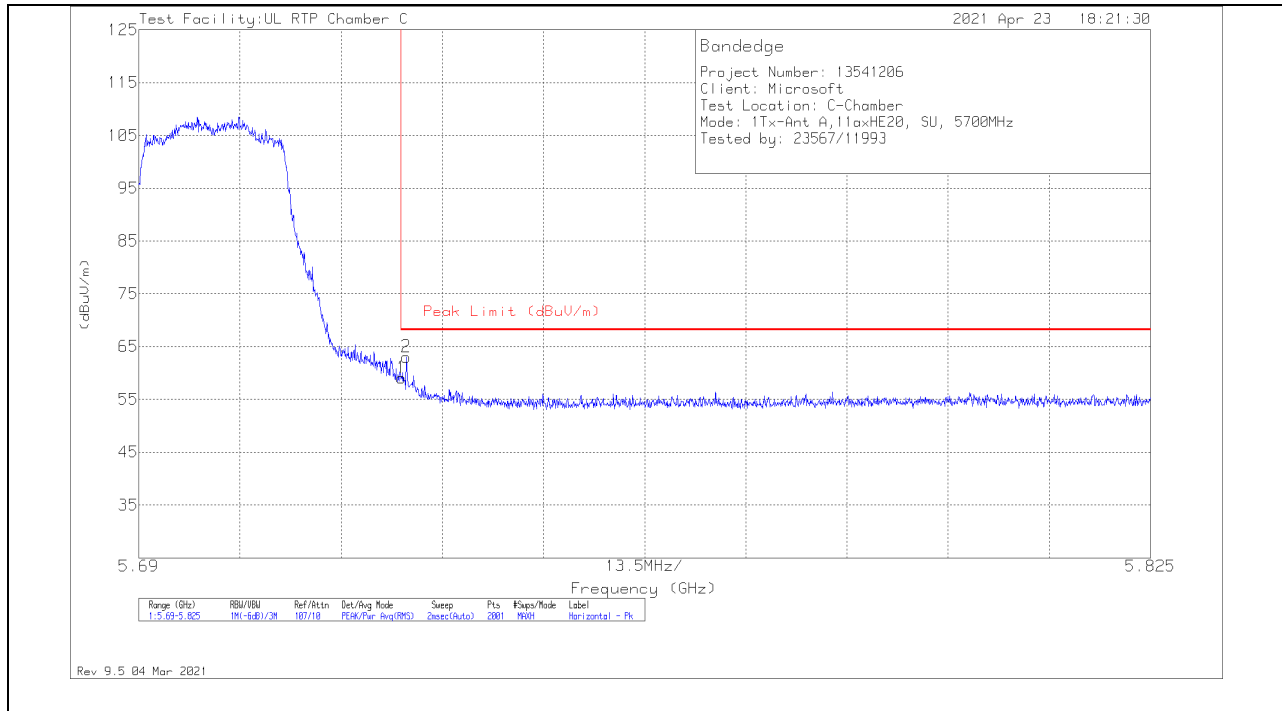

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	36.88	Pk	34.8	-12.6	59.08	68.2	-9.12	214	312	H
2	5.72571	40.87	Pk	34.8	-12.6	63.07	68.2	-5.13	214	312	H

Pk - Peak detector

VERTICAL RESULT

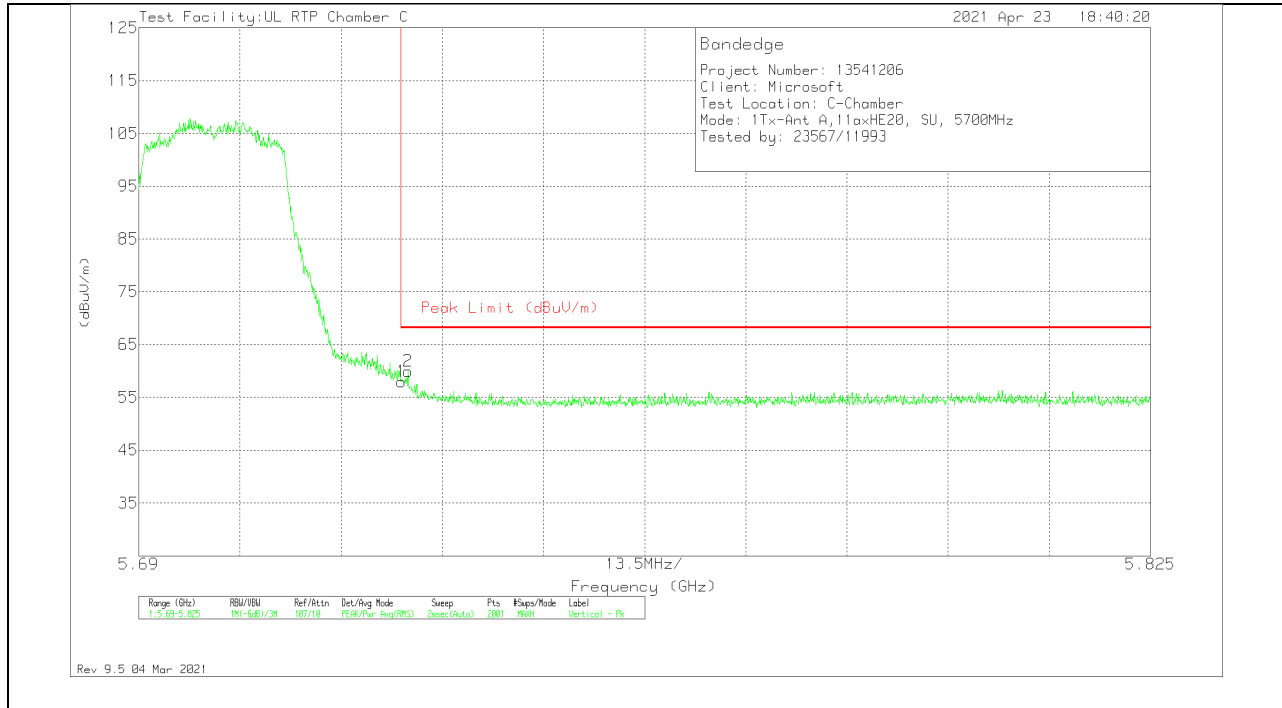


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	35.81	Pk	34.8	-12.6	58.01	68.2	-10.19	194	177	V
2	5.72591	37.7	Pk	34.8	-12.6	59.9	68.2	-8.3	194	177	V

Pk - Peak detector

1TX Antenna 1 OFDMA MODE: 106-Tones, RU Index 53

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

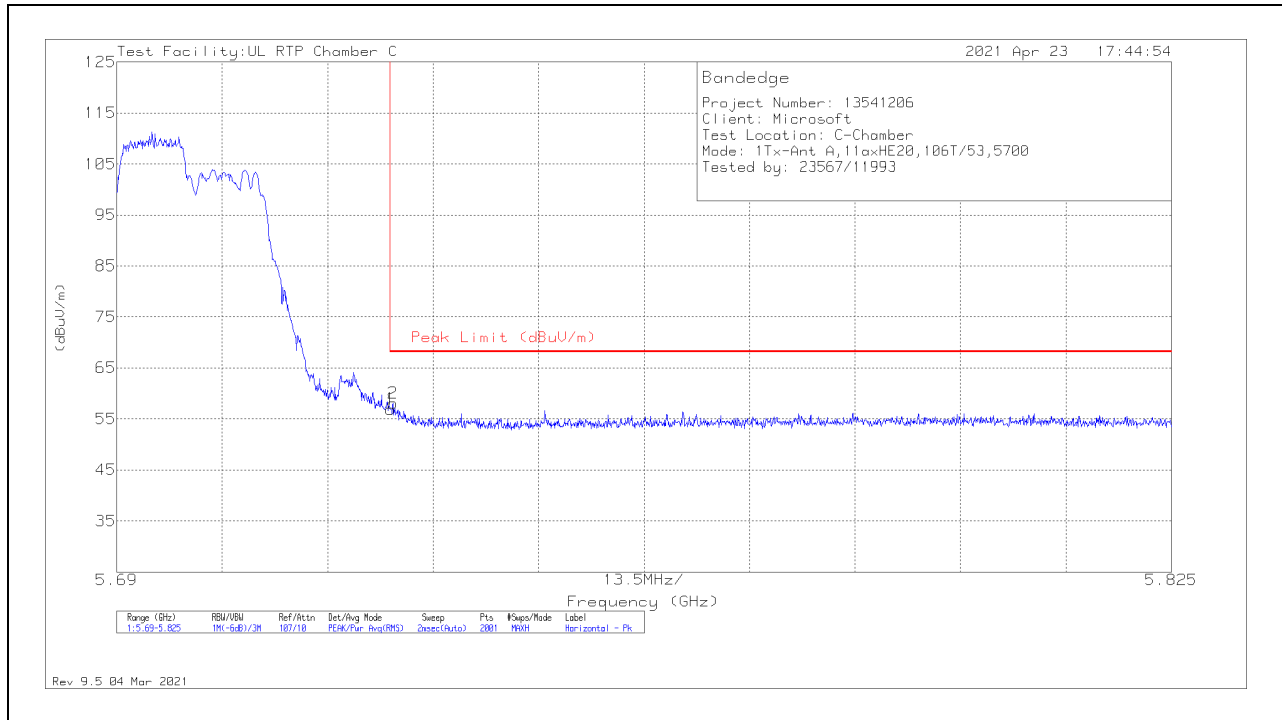

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	34.73	Pk	34.8	-12.6	56.93	68.2	-11.27	188	230	H
2	5.72537	35.94	Pk	34.8	-12.6	58.14	68.2	-10.06	188	230	H

Pk - Peak detector

VERTICAL RESULT

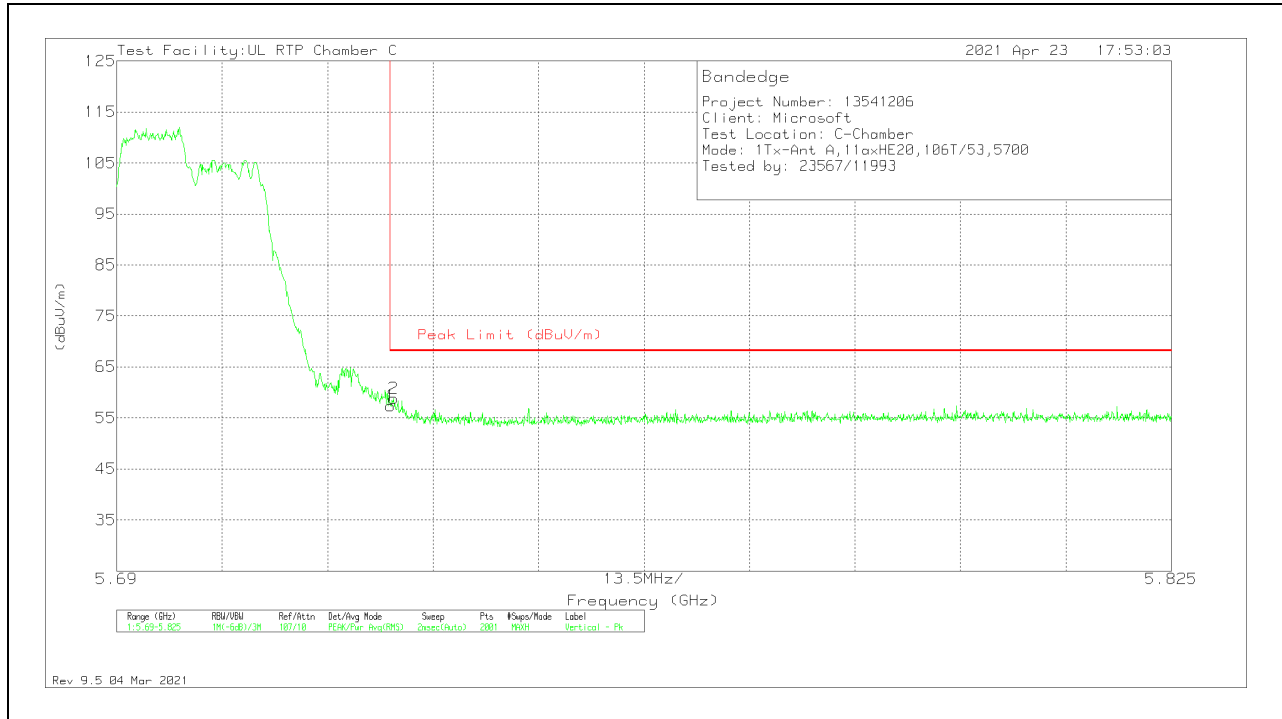


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	35.2	Pk	34.8	-12.6	57.4	68.2	-10.8	184	179	V
2	5.72544	36.65	Pk	34.8	-12.6	58.85	68.2	-9.35	184	179	V

Pk - Peak detector

1TX Antenna 1 OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

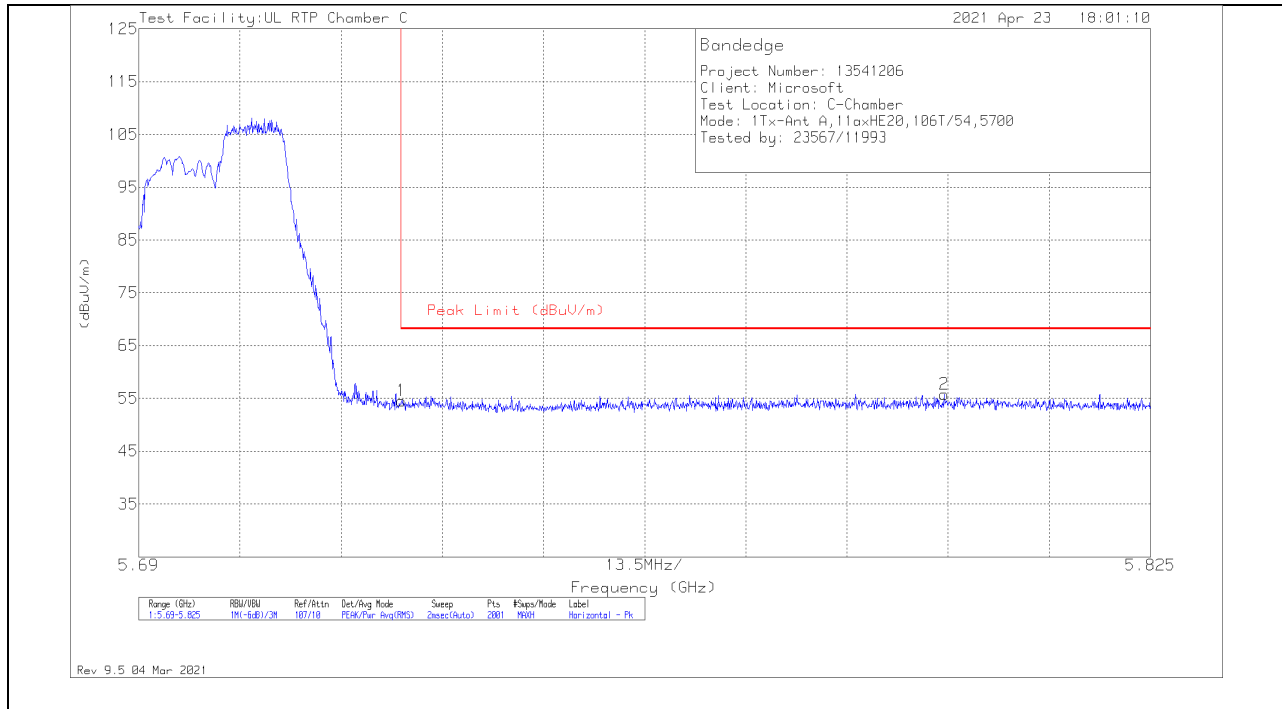

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	32.33	Pk	34.8	-12.6	54.53	68.2	-13.67	235	264	H
2	5.79746	33.04	Pk	35	-12.3	55.74	68.2	-12.46	235	264	H

Pk - Peak detector

VERTICAL RESULT

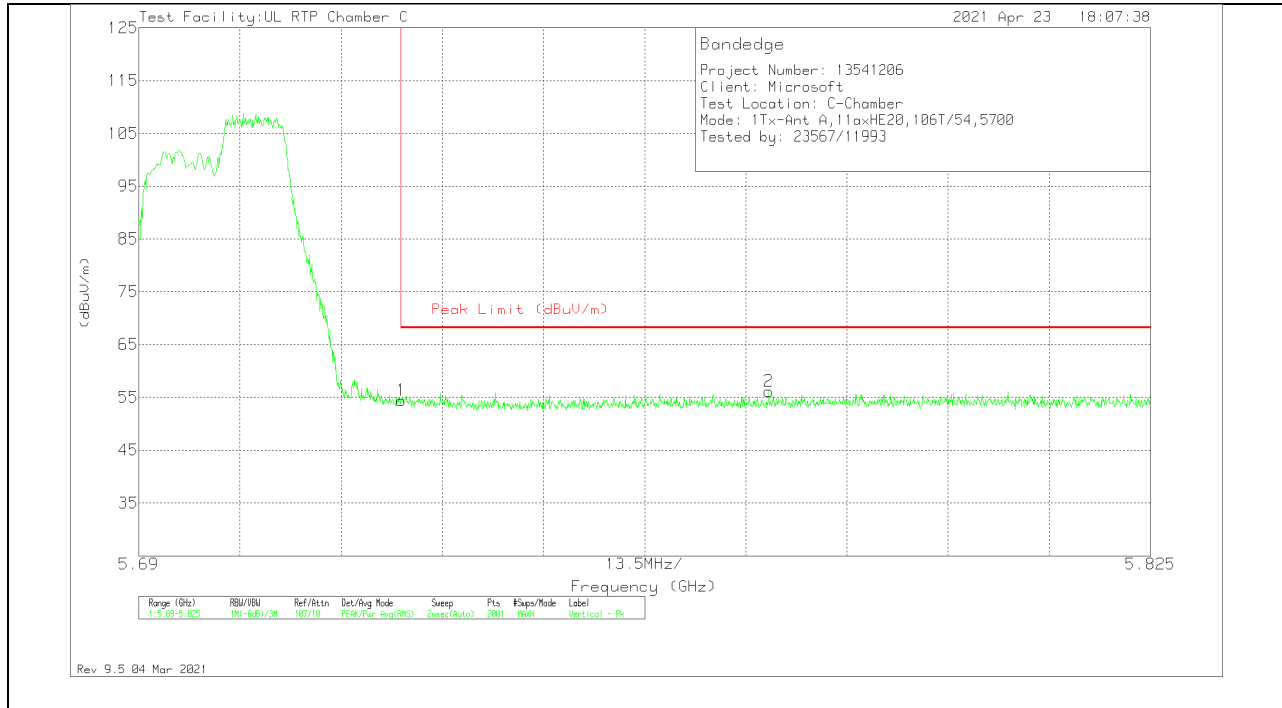


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	32.25	Pk	34.8	-12.6	54.45	68.2	-13.75	183	239	V
2	5.77404	33.7	Pk	34.9	-12.5	56.1	68.2	-12.1	183	239	V

Pk - Peak detector

1TX Antenna 1 OFDMA MODE: 52-Tones, RU Index 40

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

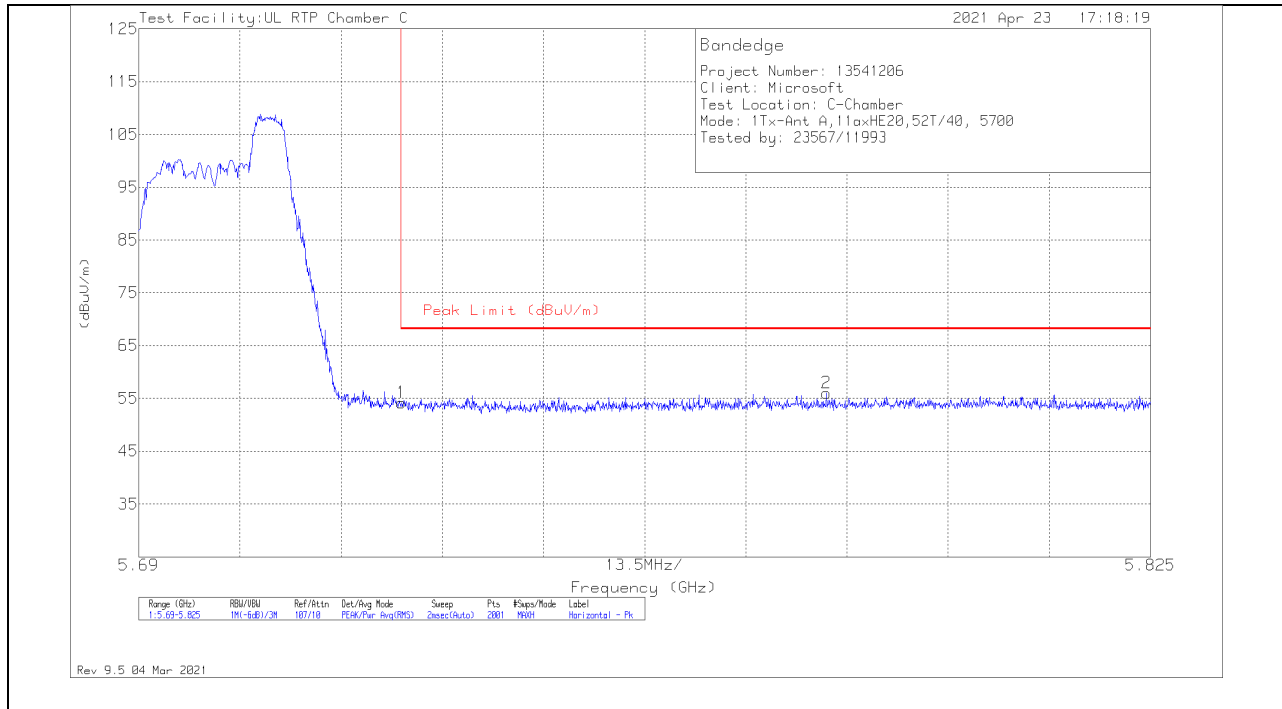

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	31.99	Pk	34.8	-12.6	54.19	68.2	-14.01	204	284	H
2	5.78173	33.35	Pk	35	-12.3	56.05	68.2	-12.15	204	284	H

Pk - Peak detector

VERTICAL RESULT

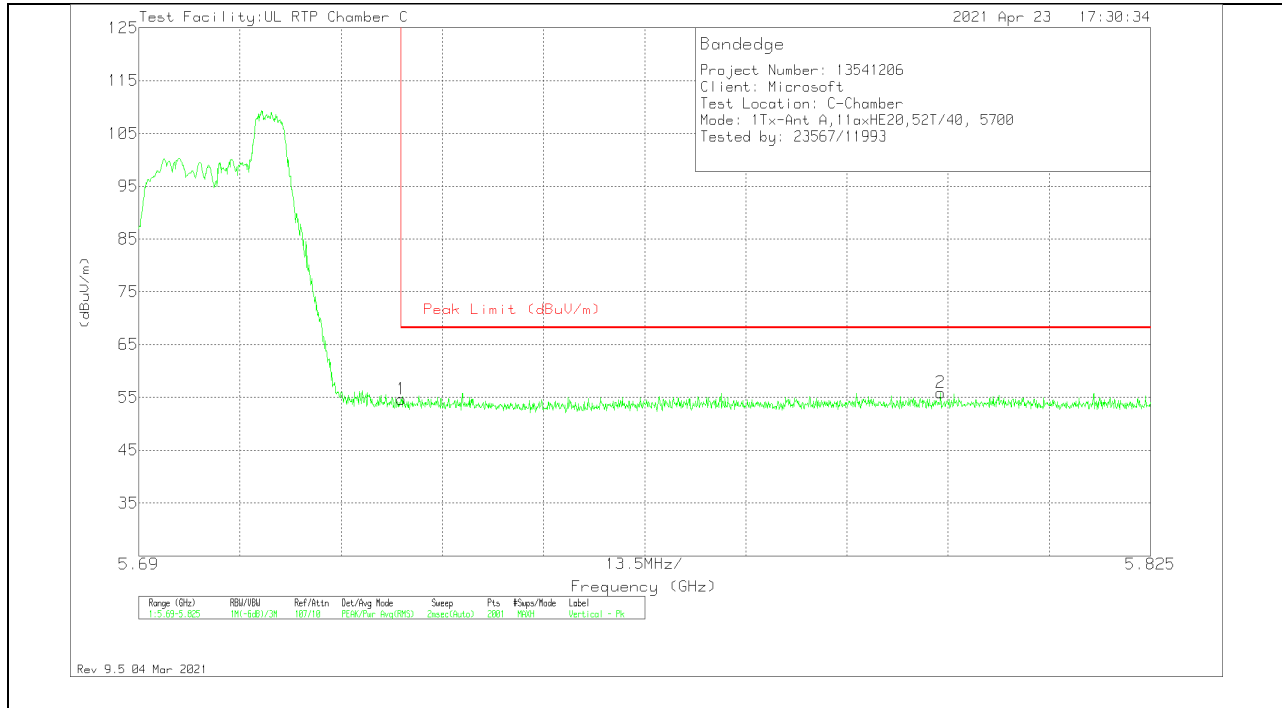

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	32.42	Pk	34.8	-12.6	54.62	68.2	-13.58	188	211	V
2	5.79699	33.17	Pk	35	-12.3	55.87	68.2	-12.33	188	211	V

Pk - Peak detector