


1TX Antenna 1 OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

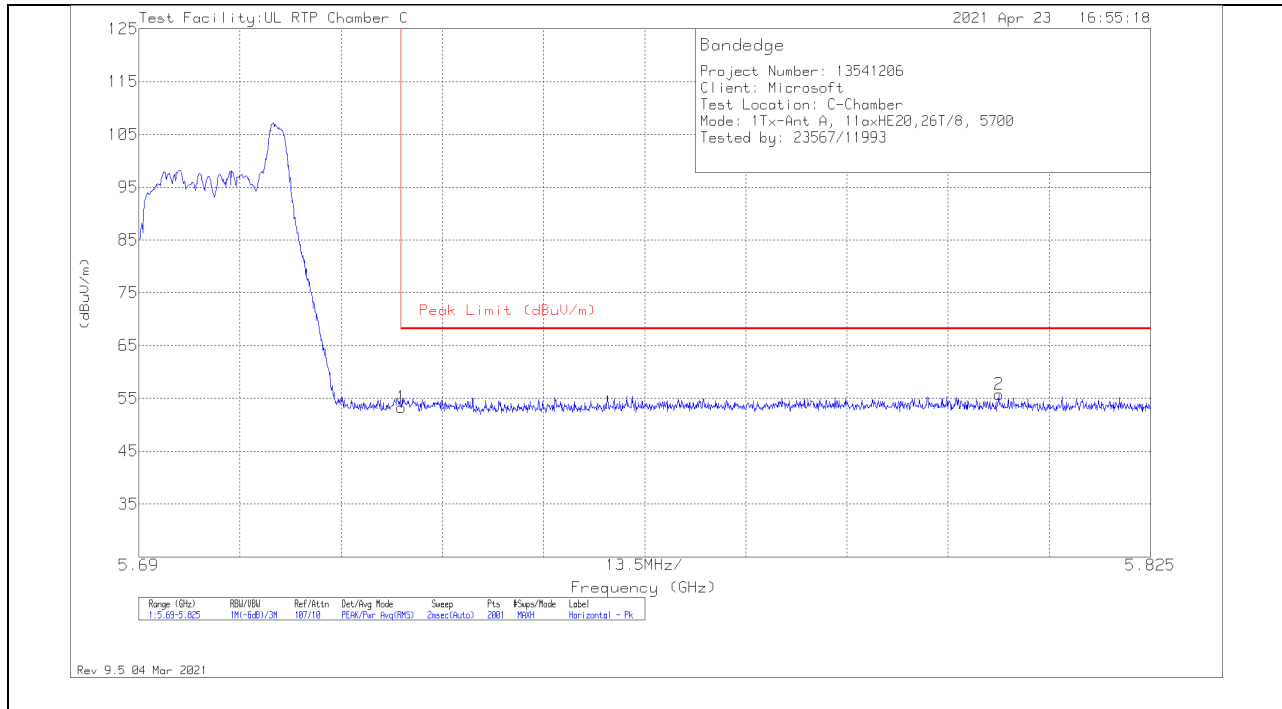

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	31.15	Pk	34.8	-12.6	53.35	68.2	-14.85	196	292	H
2	5.80475	33.07	Pk	35	-12.3	55.77	68.2	-12.43	196	292	H

Pk - Peak detector

VERTICAL RESULT

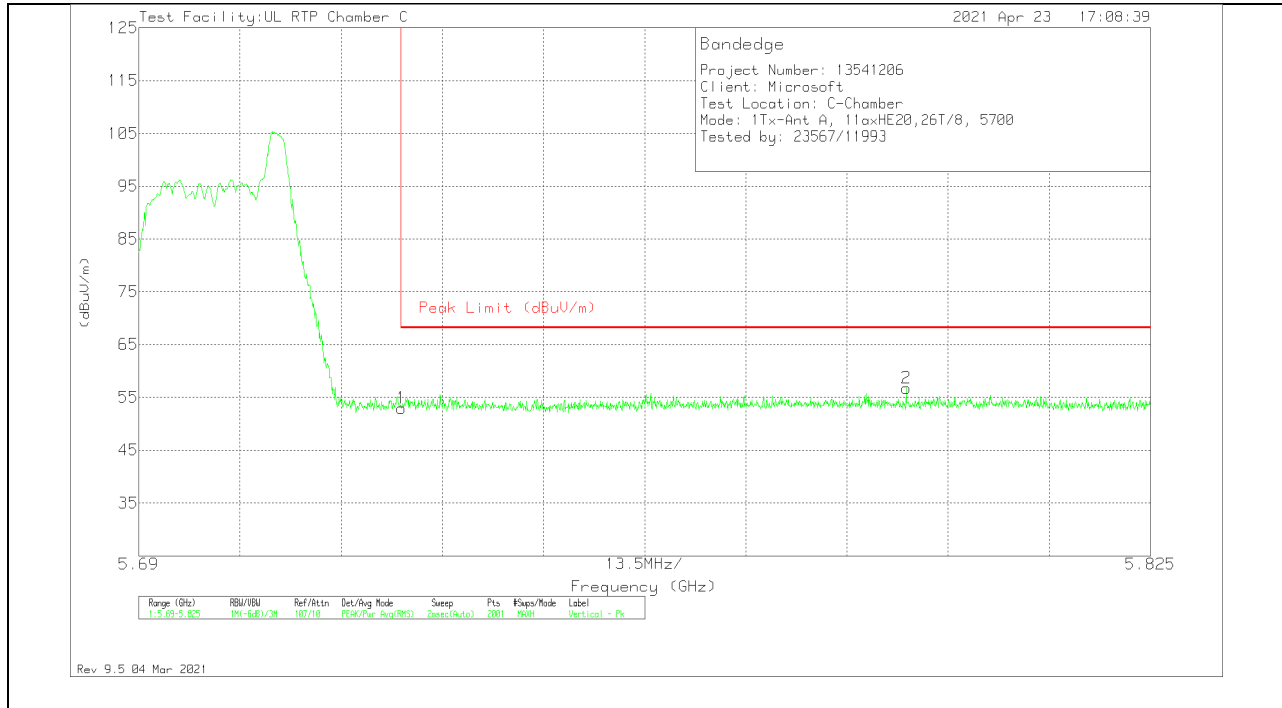


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72503	30.75	Pk	34.8	-12.6	52.95	68.2	-15.25	213	215	V
2	5.7924	34.01	Pk	35	-12.3	56.71	68.2	-11.49	213	215	V

Pk - Peak detector

1TX Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

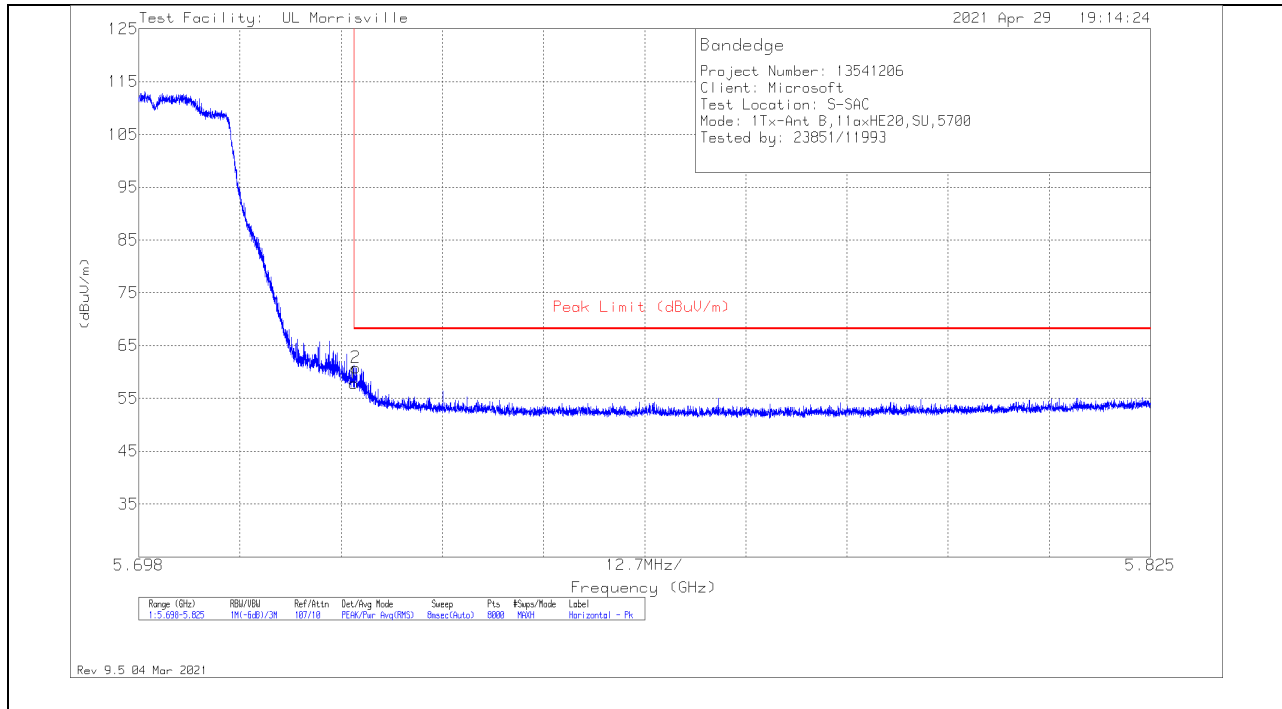

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.64	Pk	34.7	-23.5	57.84	68.2	-10.36	48	164	H
2	5.72526	49.58	Pk	34.7	-23.5	60.78	68.2	-7.42	48	164	H

Pk - Peak detector

VERTICAL RESULT

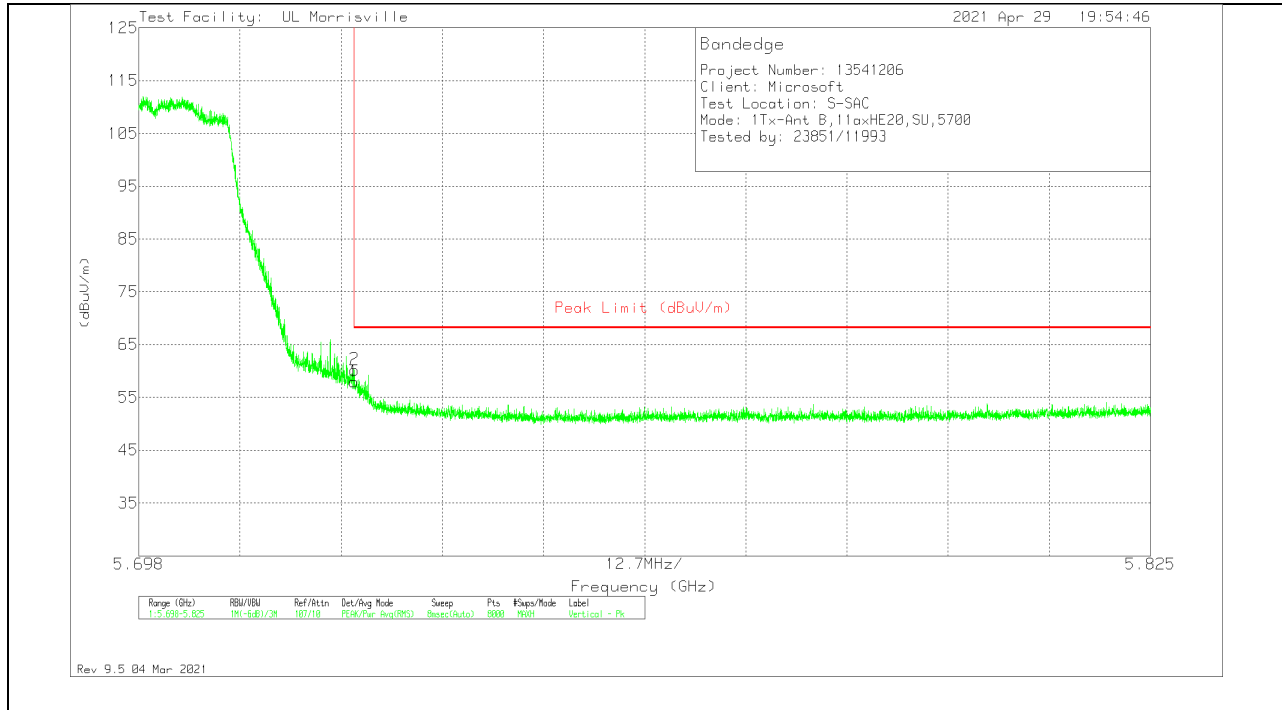


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.73	Pk	34.7	-23.5	57.93	68.2	-10.27	27	211	V
2	5.72505	49.05	Pk	34.7	-23.5	60.25	68.2	-7.95	27	211	V

Pk - Peak detector

1TX Antenna 2 OFDMA MODE: 106-Tones, RU Index 54

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

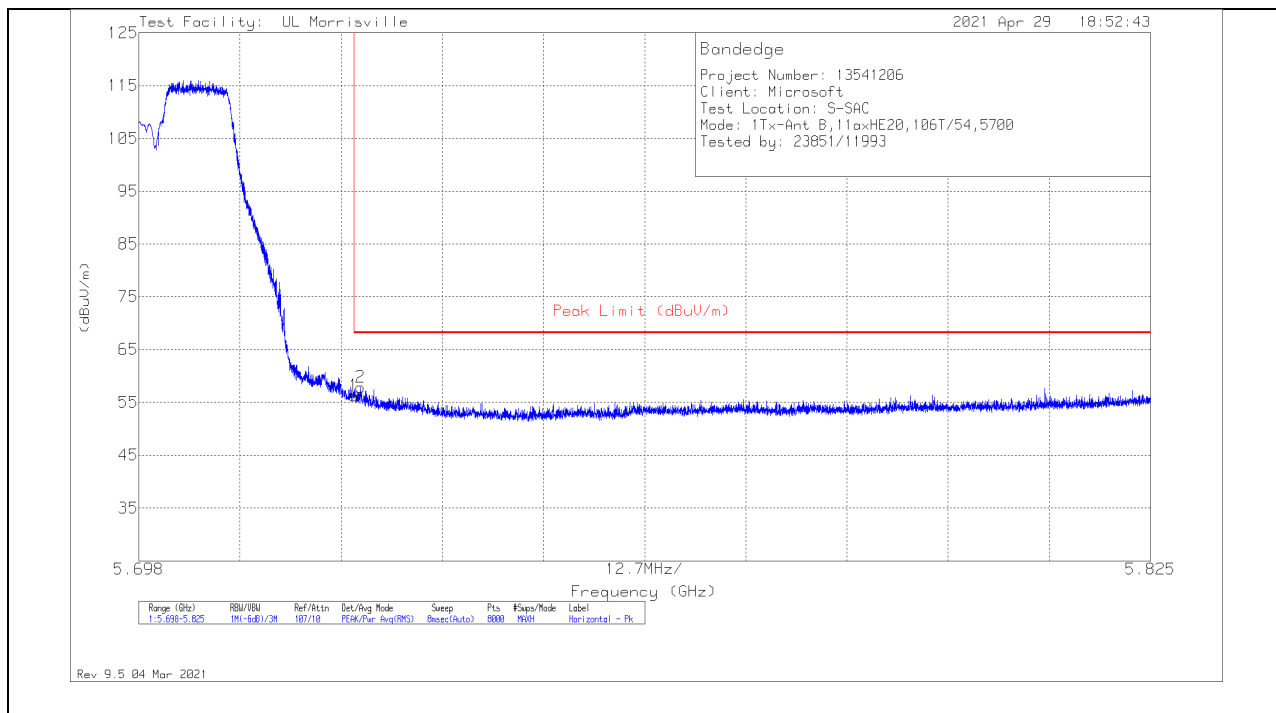

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.02	Pk	34.7	-23.5	56.22	68.2	-11.98	59	188	H
2	5.72585	46.65	Pk	34.7	-23.5	57.85	68.2	-10.35	59	188	H

Pk - Peak detector

VERTICAL RESULT

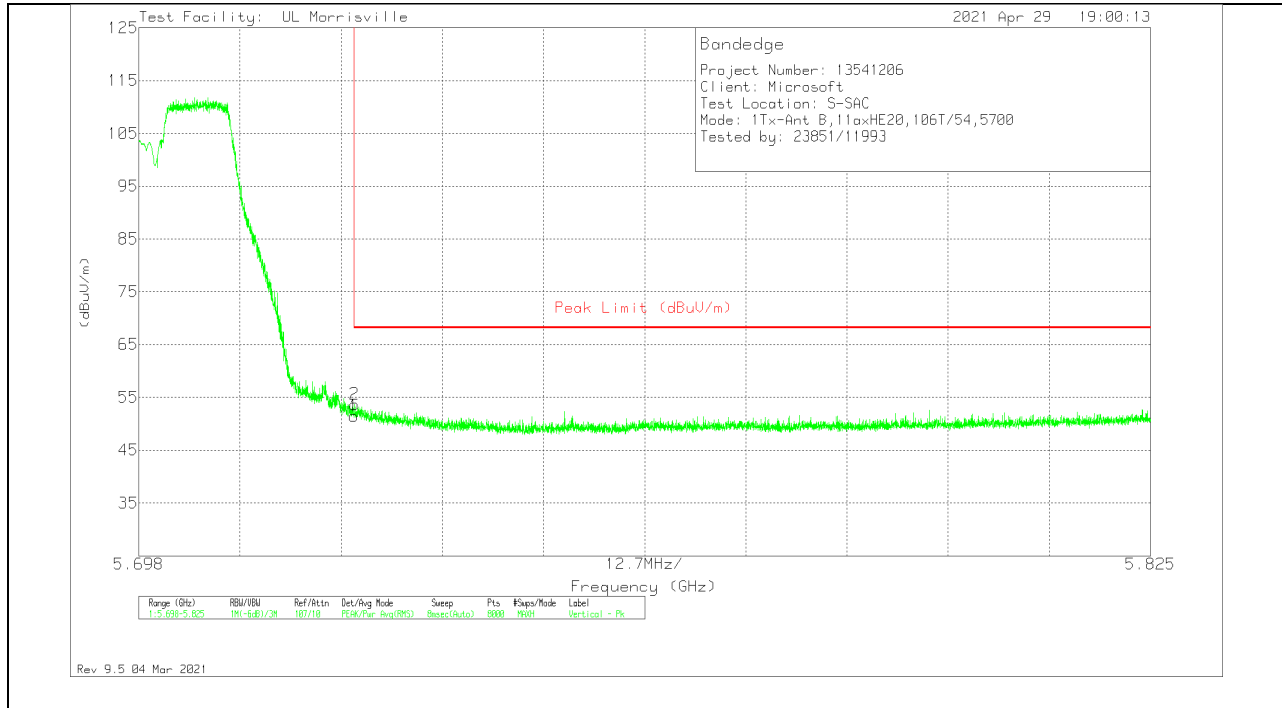


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.3	Pk	34.7	-23.5	51.5	68.2	-16.7	8	274	V
2	5.7251	42.47	Pk	34.7	-23.5	53.67	68.2	-14.53	8	274	V

Pk - Peak detector

1TX Antenna 2 OFDMA MODE: 52-Tones, RU Index 40

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

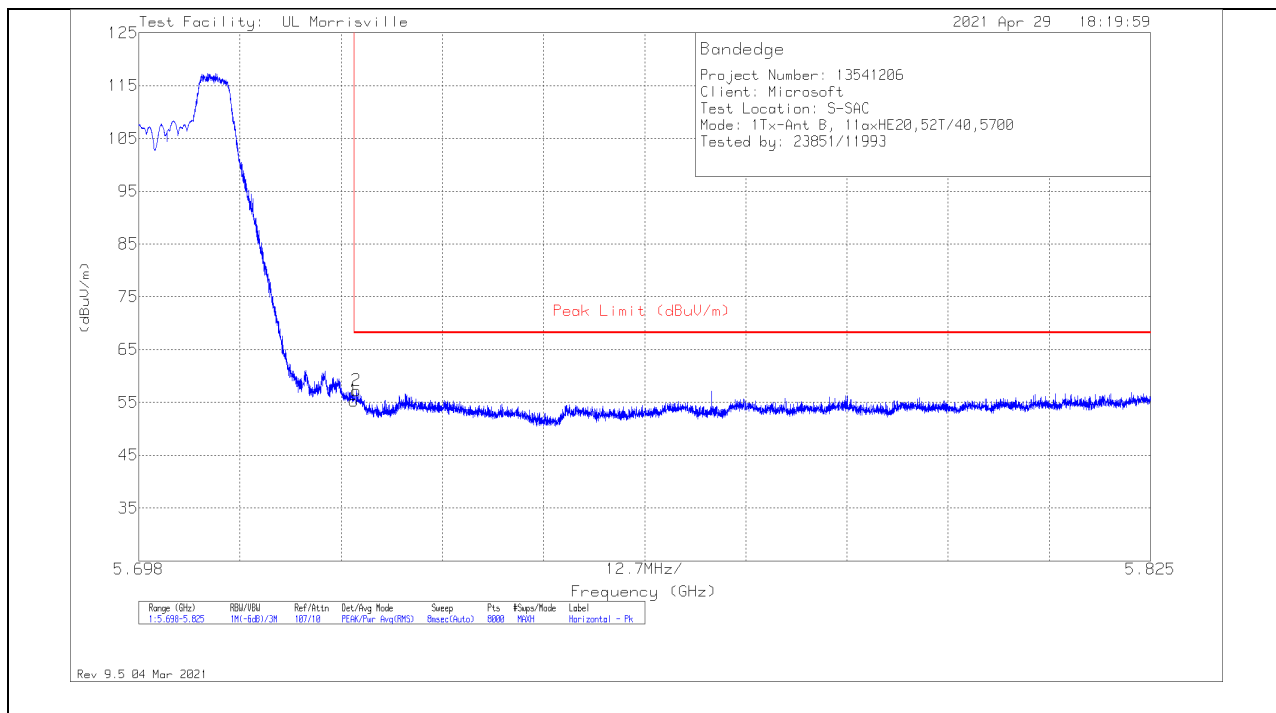

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.06	Pk	34.7	-23.5	55.26	68.2	-12.94	79	193	H
2	5.72529	45.99	Pk	34.7	-23.5	57.19	68.2	-11.01	79	193	H

Pk - Peak detector

VERTICAL RESULT

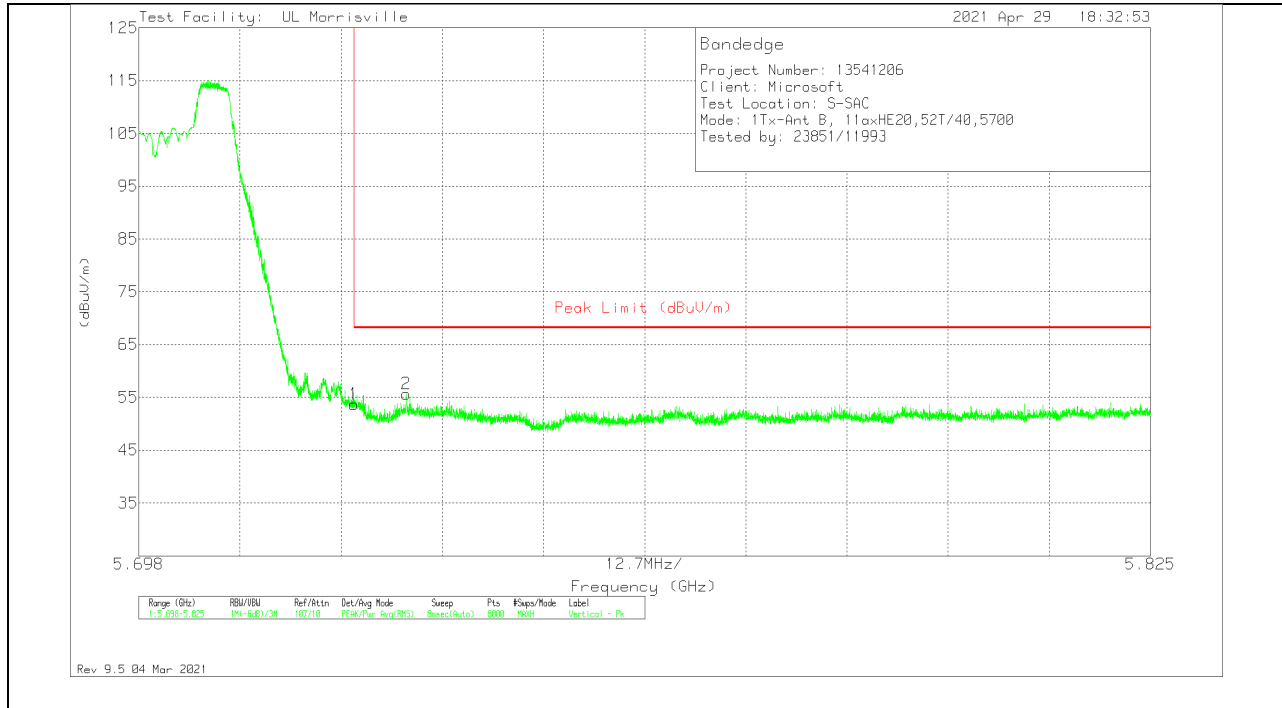


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.45	Pk	34.7	-23.5	53.65	68.2	-14.55	17	211	V
2	5.7316	44.45	Pk	34.7	-23.5	55.65	68.2	-12.55	17	211	V

Pk - Peak detector

1TX Antenna 2 OFDMA MODE: 26-Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

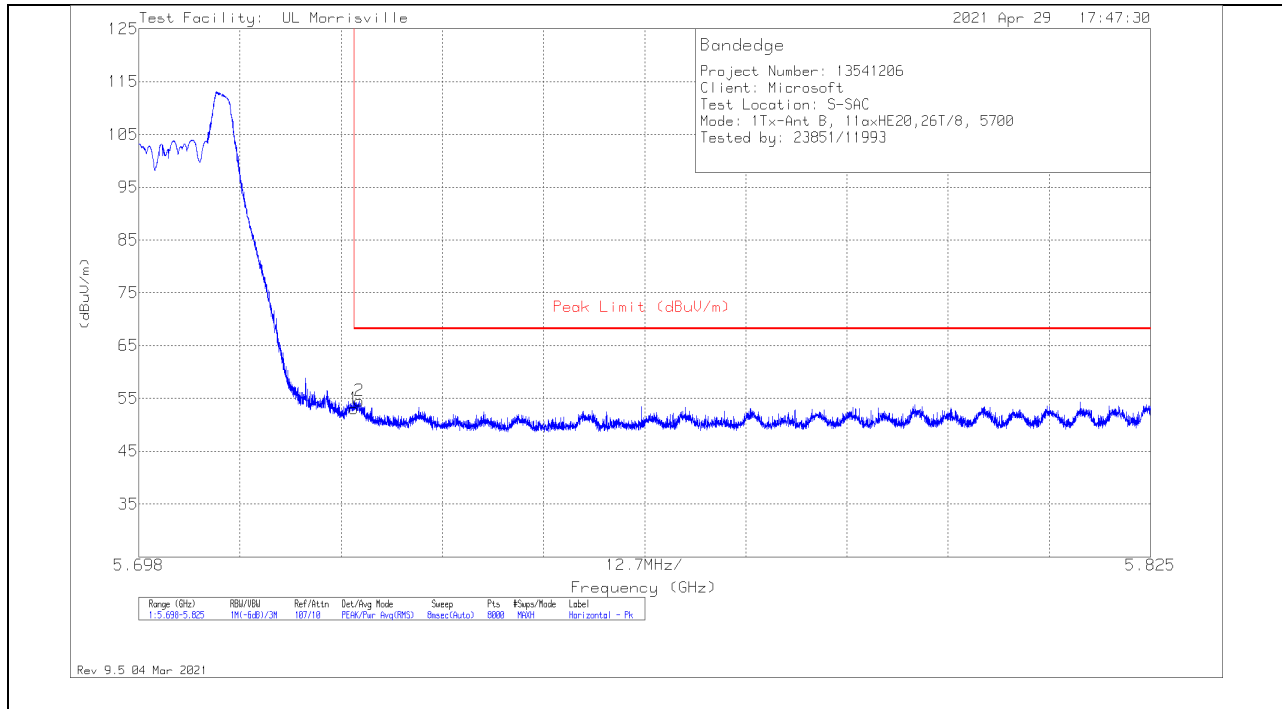

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	41.83	Pk	34.7	-23.5	53.03	68.2	-15.17	90	188	H
2	5.72571	43.31	Pk	34.7	-23.5	54.51	68.2	-13.69	90	188	H

Pk - Peak detector

VERTICAL RESULT

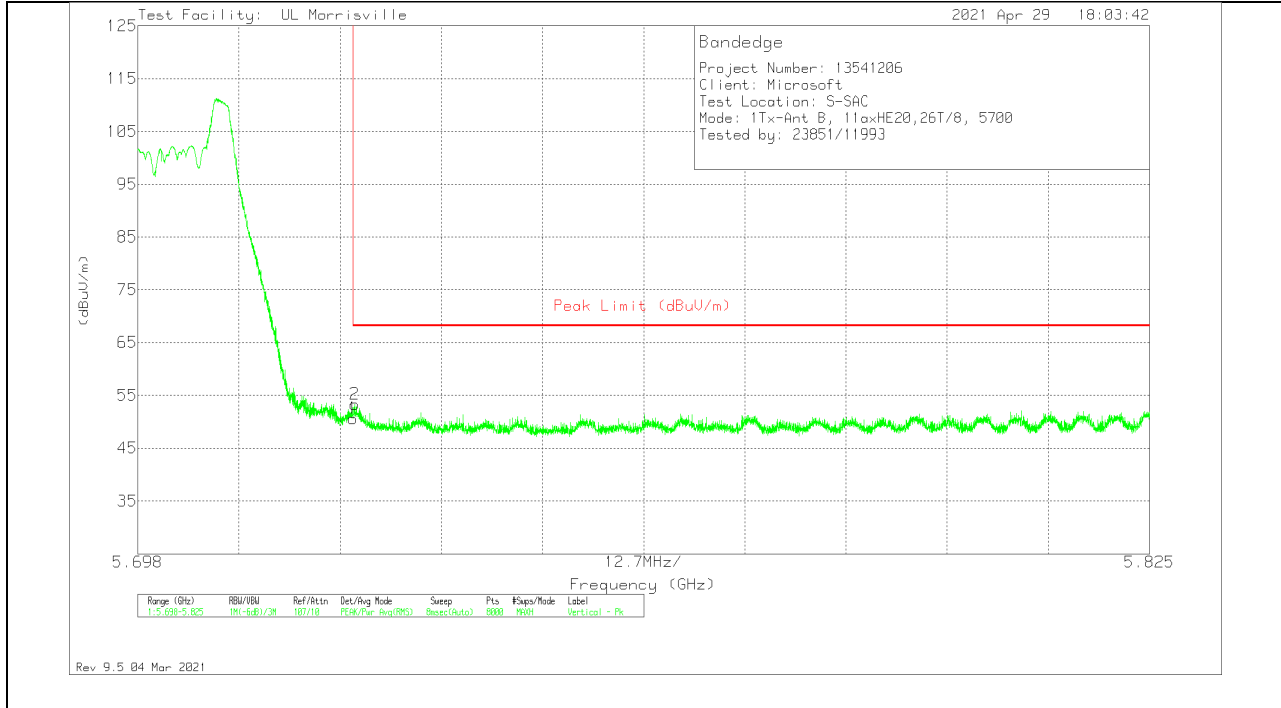

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.44	Pk	34.7	-23.5	50.64	68.2	-17.56	30	189	V
2	5.72523	42.06	Pk	34.7	-23.5	53.26	68.2	-14.94	30	189	V


Pk - Peak detector

10.1.3. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (HIGH CHANNEL 126)


HORIZONTAL RESULT

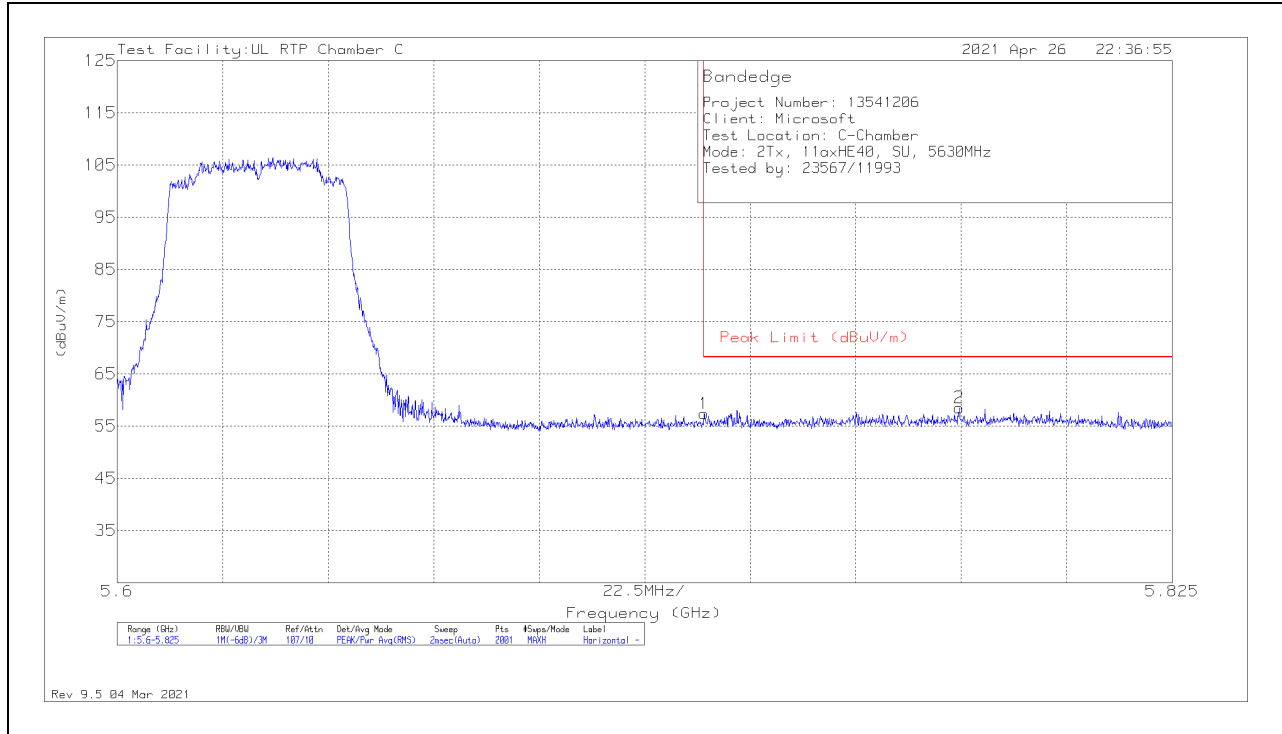

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	35.18	Pk	34.8	-12.6	57.38	68.2	-10.82	25	291	H
2	5.77955	35.8	Pk	35	-12.3	58.5	68.2	-9.7	25	291	H

Pk - Peak detector

VERTICAL RESULT

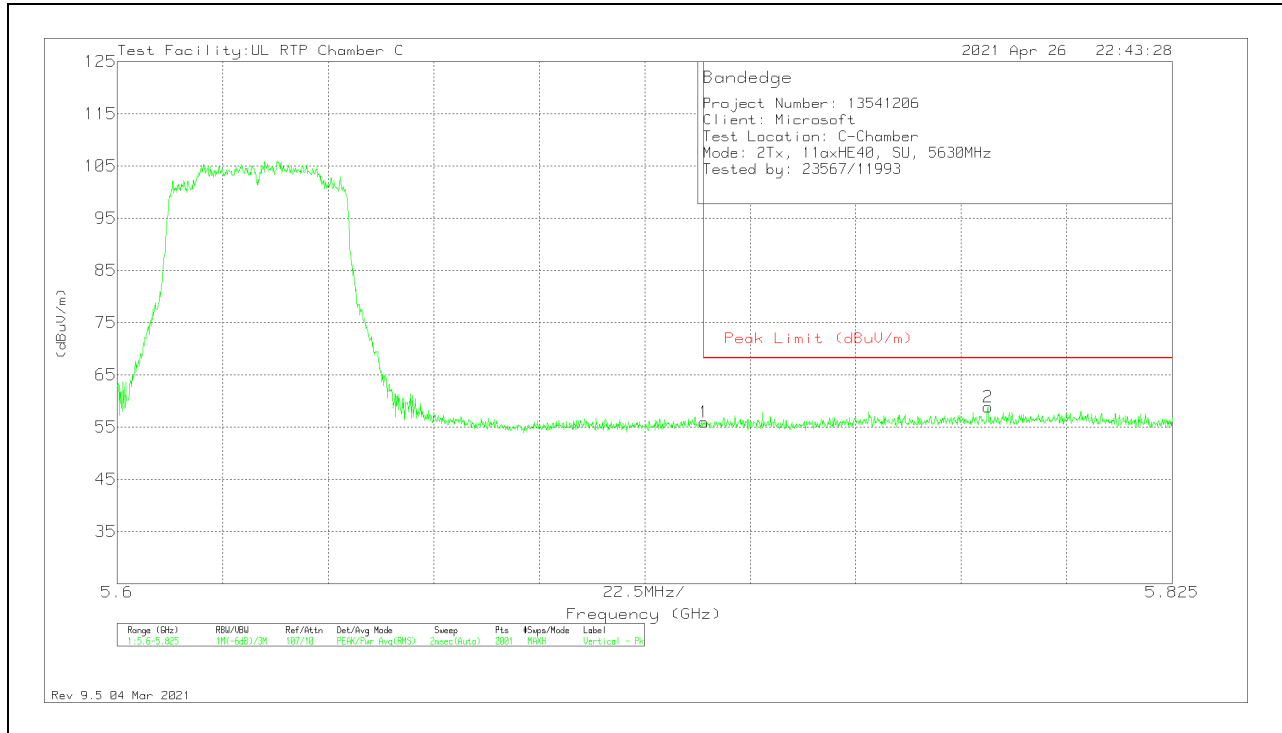


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	33.73	Pk	34.8	-12.6	55.93	68.2	-12.27	10	190	V
2	5.78574	36.13	Pk	35	-12.3	58.83	68.2	-9.37	10	190	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL 134)


HORIZONTAL RESULT

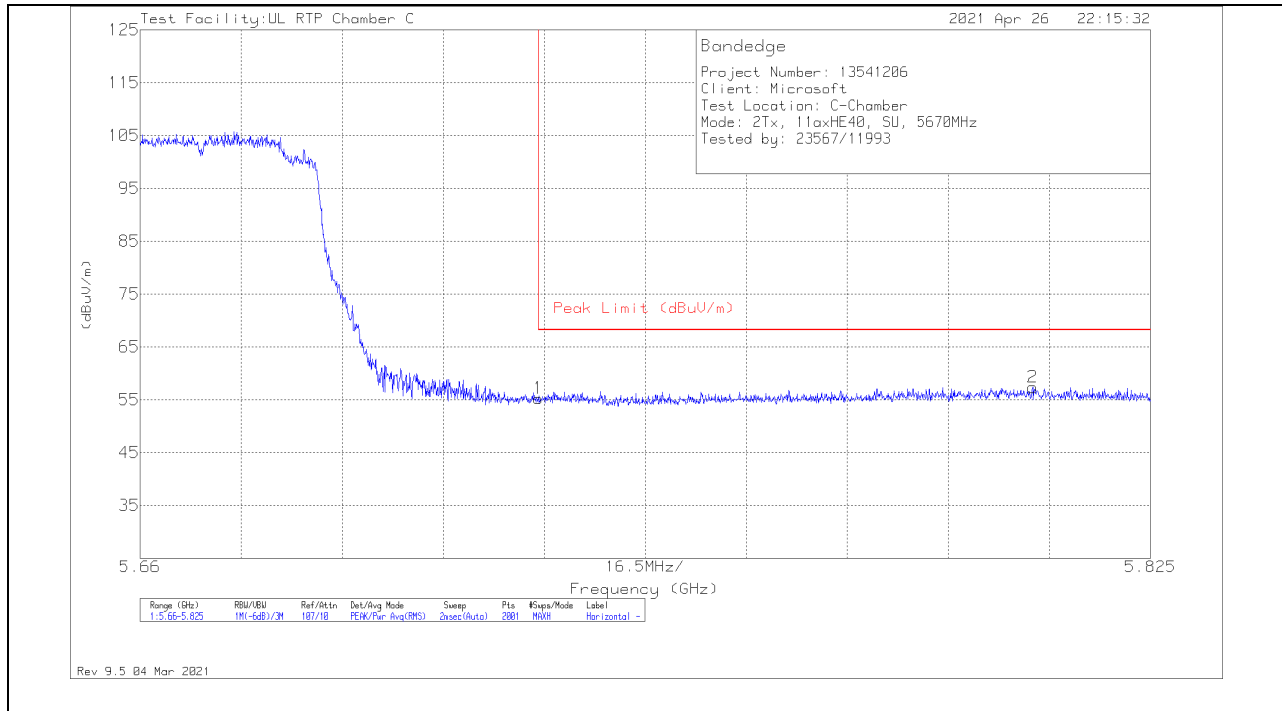

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.05	Pk	34.8	-12.6	55.25	68.2	-12.95	0	280	H
2	5.80578	34.66	Pk	35	-12.3	57.36	68.2	-10.84	0	280	H

Pk - Peak detector

VERTICAL RESULT

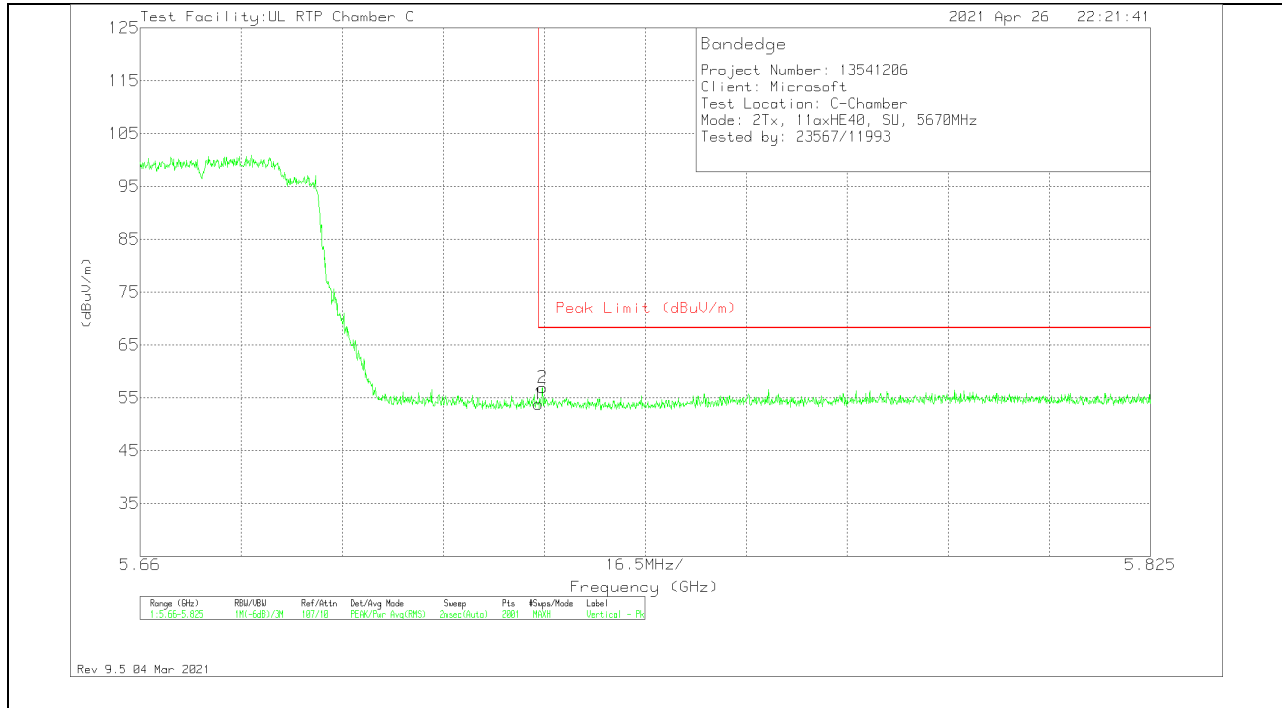


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	31.57	Pk	34.8	-12.6	53.77	68.2	-14.43	347	221	V
2	5.72575	34.74	Pk	34.8	-12.6	56.94	68.2	-11.26	347	221	V

Pk - Peak detector

1TX Antenna 1 OFDMA MODE: SU, Single User

BANDEDGE (HIGH CHANNEL 126)


HORIZONTAL RESULT

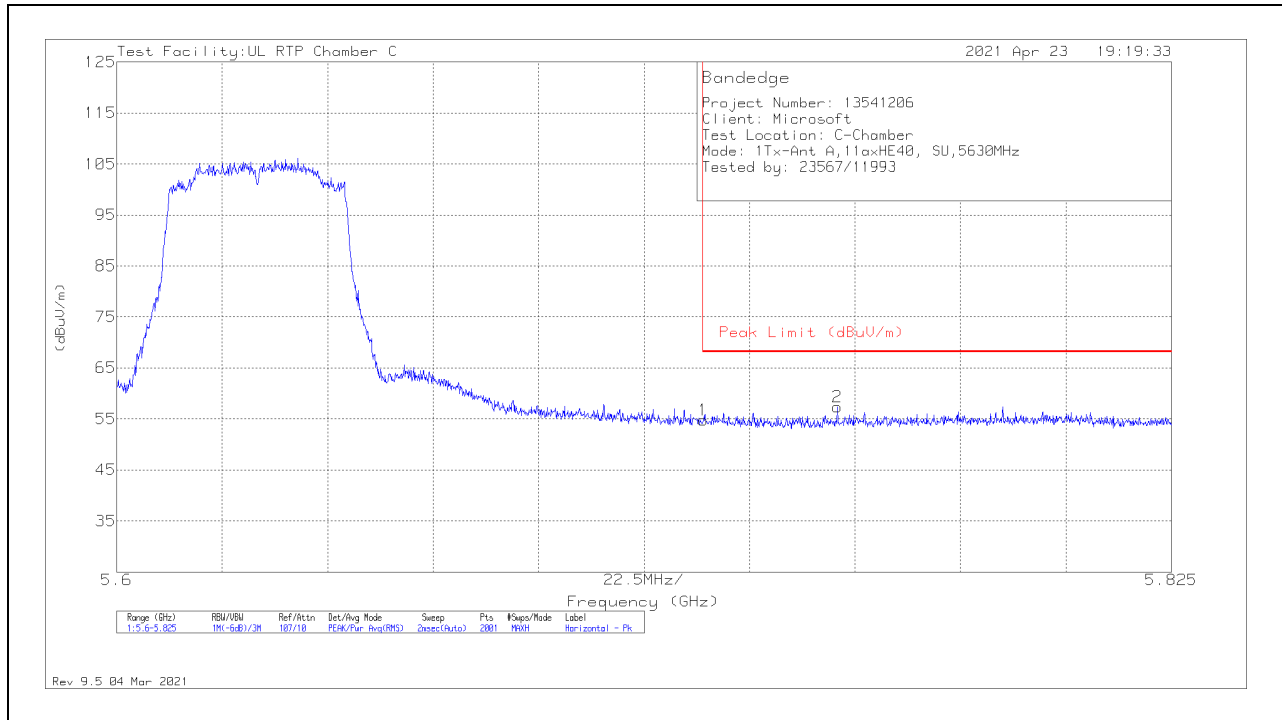

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	32.55	Pk	34.8	-12.6	54.75	68.2	-13.45	211	255	H
2	5.75368	35.15	Pk	34.9	-12.7	57.35	68.2	-10.85	211	255	H

Pk - Peak detector

VERTICAL RESULT

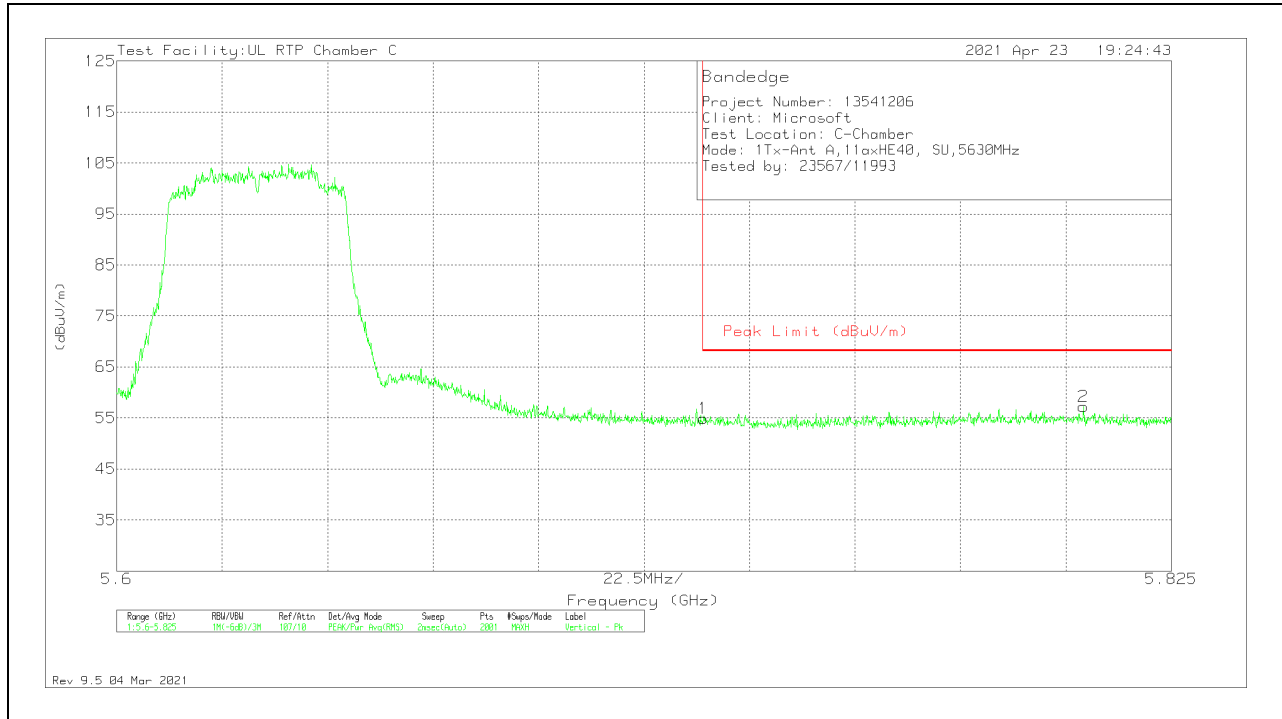


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	32.76	Pk	34.8	-12.6	54.96	68.2	-13.24	204	176	V
2	5.80621	34.56	Pk	35	-12.3	57.26	68.2	-10.94	204	176	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL 134)


HORIZONTAL RESULT

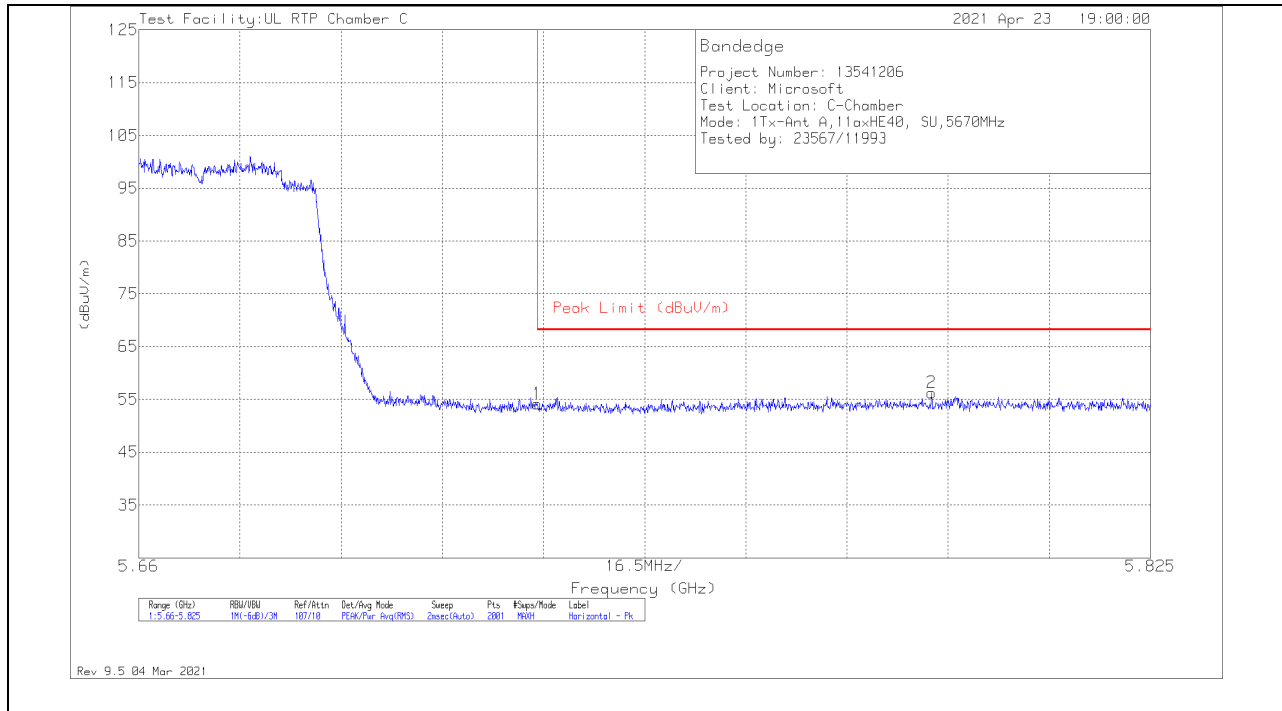

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	31.97	Pk	34.8	-12.6	54.17	68.2	-14.03	233	350	H
2	5.78928	33.58	Pk	35	-12.3	56.28	68.2	-11.92	233	350	H

Pk - Peak detector

VERTICAL RESULT

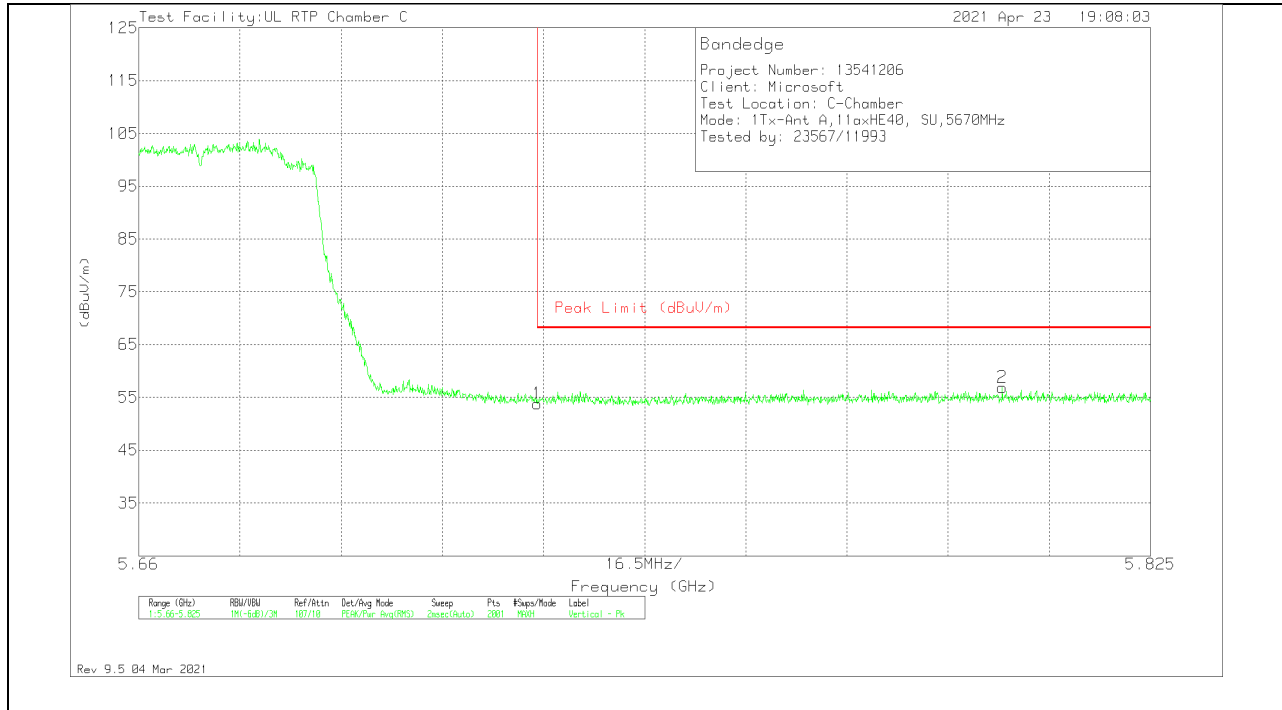


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	31.61	Pk	34.8	-12.6	53.81	68.2	-14.39	200	297	V
2	5.80083	34.1	Pk	35	-12.2	56.9	68.2	-11.3	200	297	V

Pk - Peak detector

1TX Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (HIGH CHANNEL 126)


HORIZONTAL RESULT

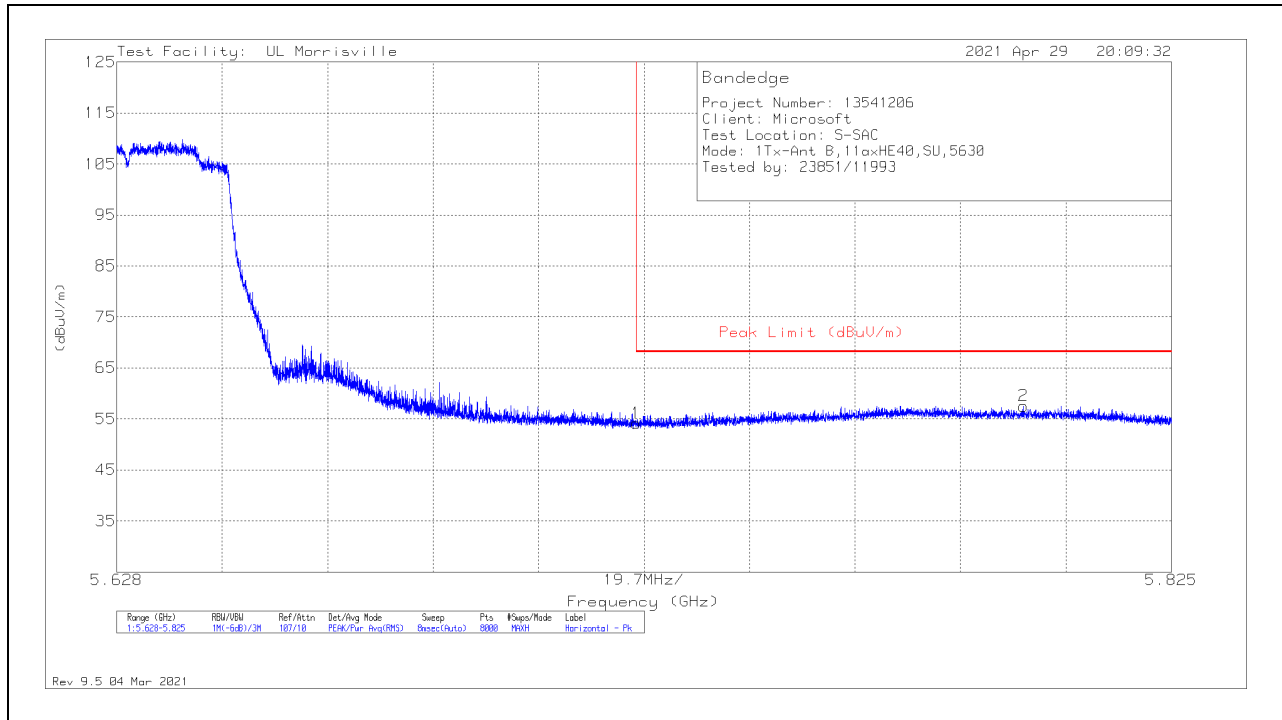

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	42.98	Pk	34.7	-23.5	54.18	68.2	-14.02	34	206	H
2	5.79732	46.05	Pk	34.7	-23.2	57.55	68.2	-10.65	34	206	H

Pk - Peak detector

VERTICAL RESULT

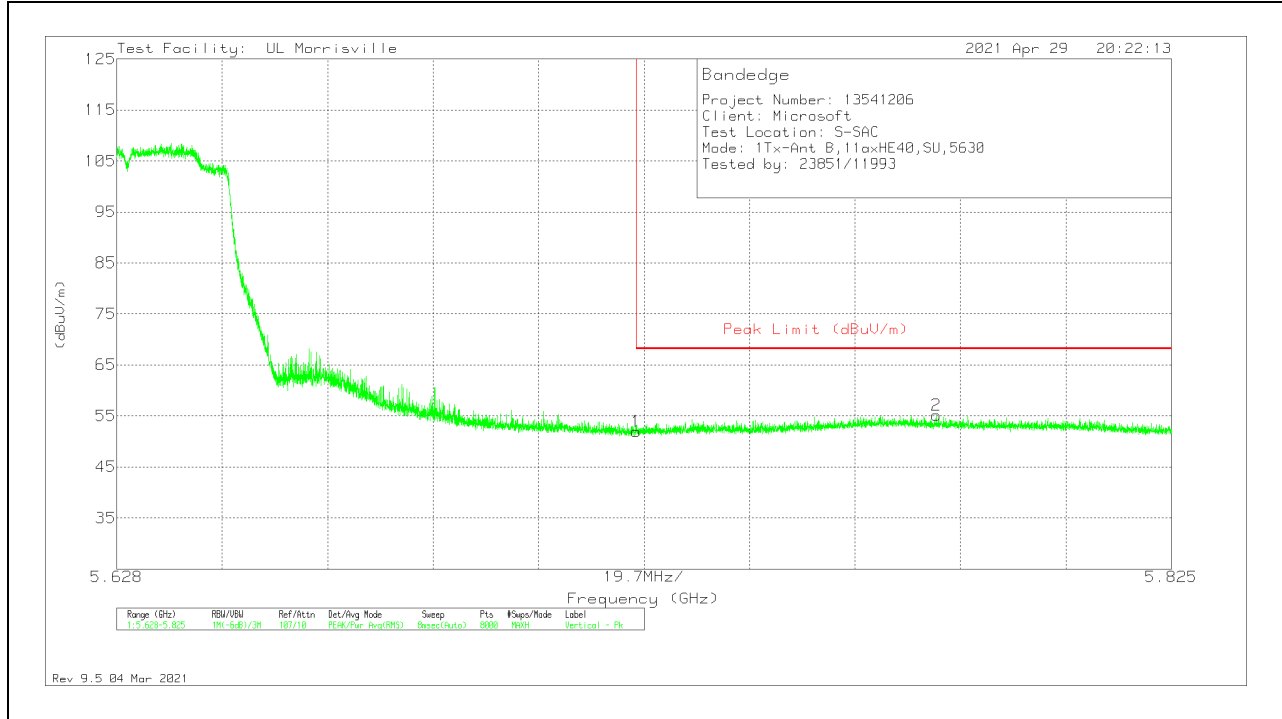


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.76	Pk	34.7	-23.5	51.96	68.2	-16.24	60	227	V
2	5.78109	43.76	Pk	34.7	-23.3	55.16	68.2	-13.04	60	227	V

Pk - Peak detector

BANEDGE (HIGH CHANNEL 134)


HORIZONTAL RESULT

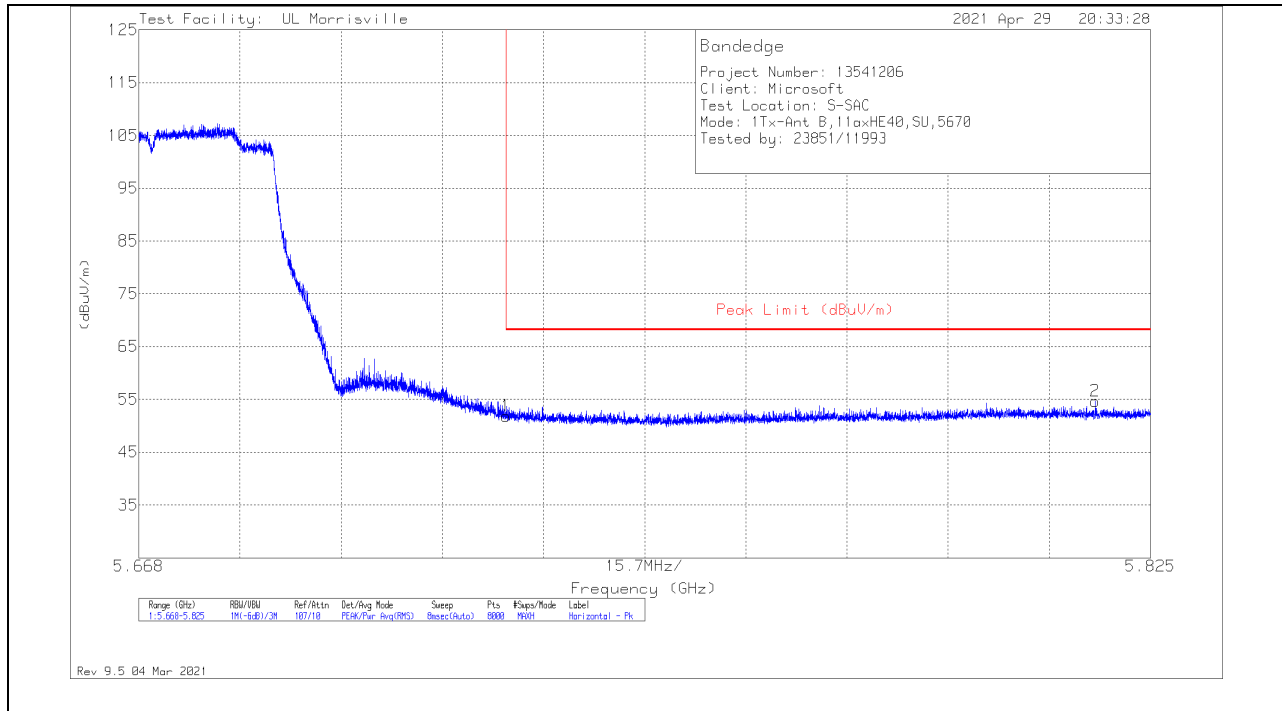

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	40.69	Pk	34.7	-23.5	51.89	68.2	-16.31	96	291	H
2	5.81646	43.06	Pk	34.8	-23.2	54.66	68.2	-13.54	96	291	H

Pk - Peak detector

VERTICAL RESULT

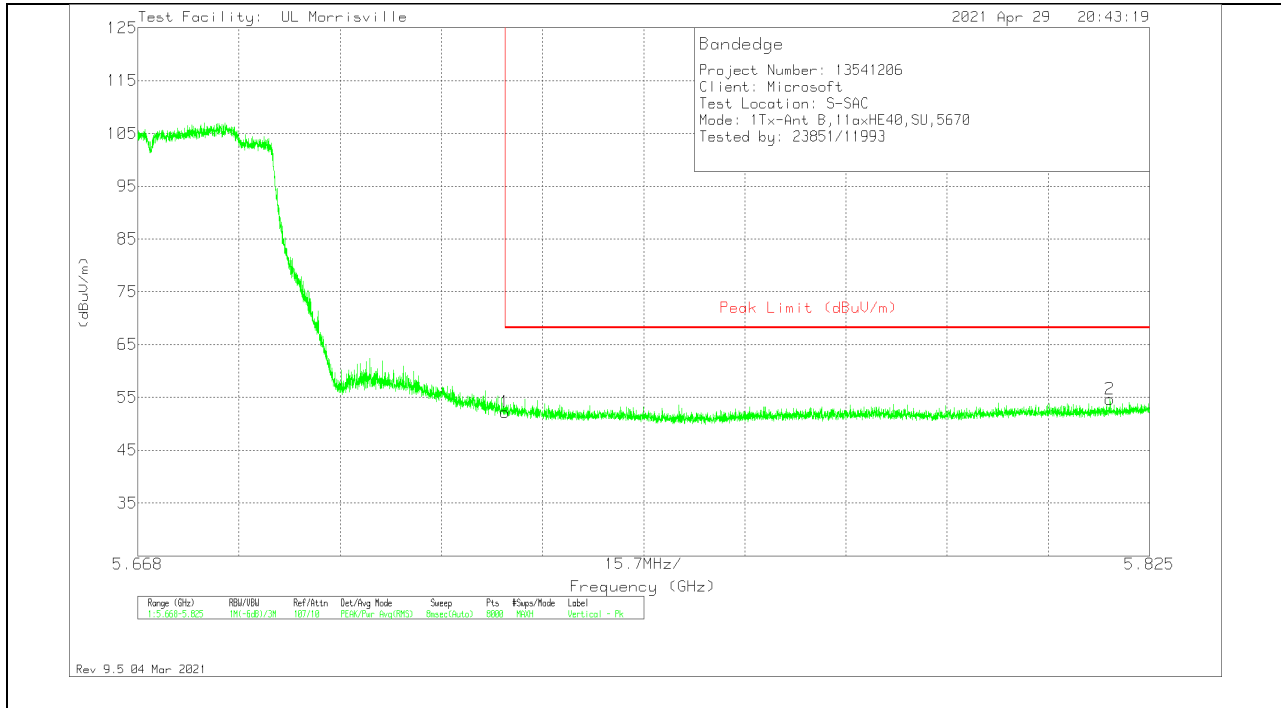

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	41.06	Pk	34.7	-23.5	52.26	68.2	-15.94	30	245	V
2	5.81887	43.1	Pk	34.8	-23.2	54.7	68.2	-13.5	30	245	V


Pk - Peak detector

10.1.4. TX ABOVE 1 GHz 802.11ax HE160 MODE IN THE 5.6GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

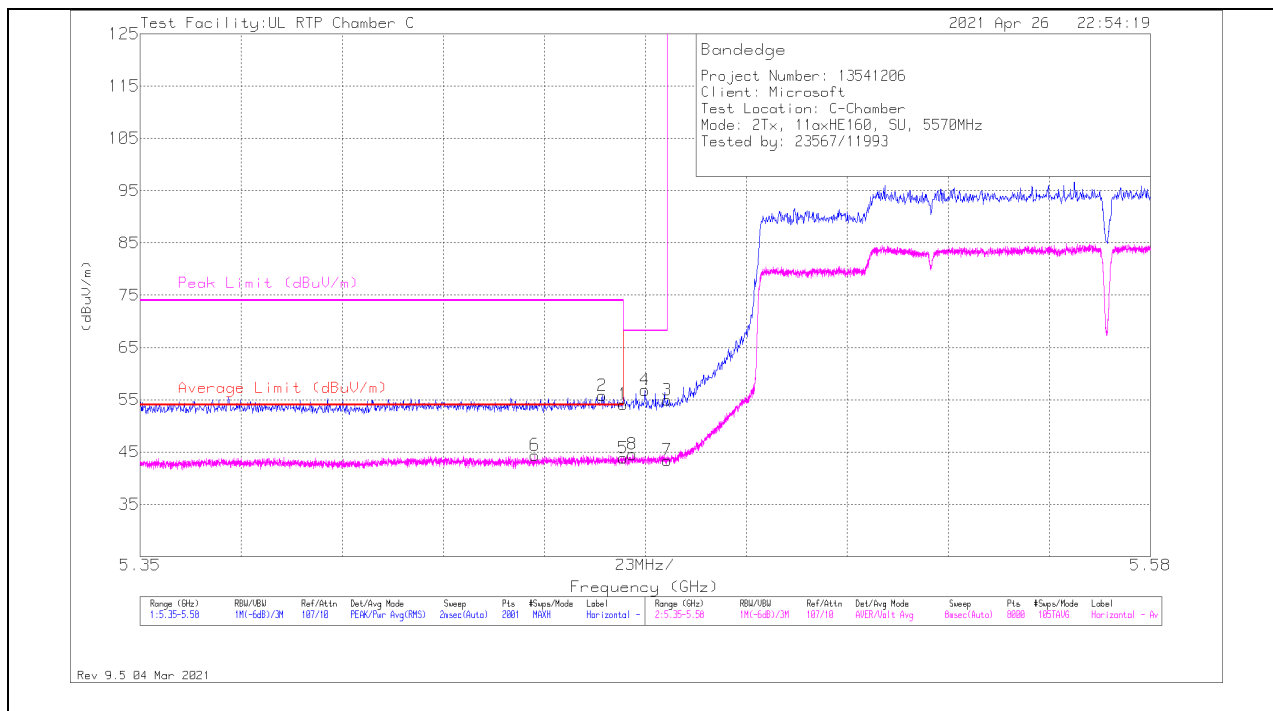

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	32.4	Pk	34.8	-13.1	0	54.1	-	-	74	-19.9	94	182	H
2	*** 5.45523	34.2	Pk	34.8	-13.2	0	55.8	-	-	74	-18.2	94	182	H
5	*** 5.45998	21.69	ADV	34.8	-13.1	.46	43.85	54	-10.15	-	-	94	182	H
6	*** 5.4398	22.33	ADV	34.8	-13.2	.46	44.39	54	-9.61	-	-	94	182	H
8	5.46205	22.38	ADV	34.8	-13.1	.46	44.54	-	-	-	-	94	182	H
4	5.46489	35.14	Pk	34.8	-13.1	0	56.84	-	-	68.2	-11.36	94	182	H
3	5.46995	33.33	Pk	34.8	-13.2	0	54.93	-	-	68.2	-13.27	94	182	H
7	5.46999	21.38	ADV	34.8	-13.2	.46	43.44	-	-	-	-	94	182	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

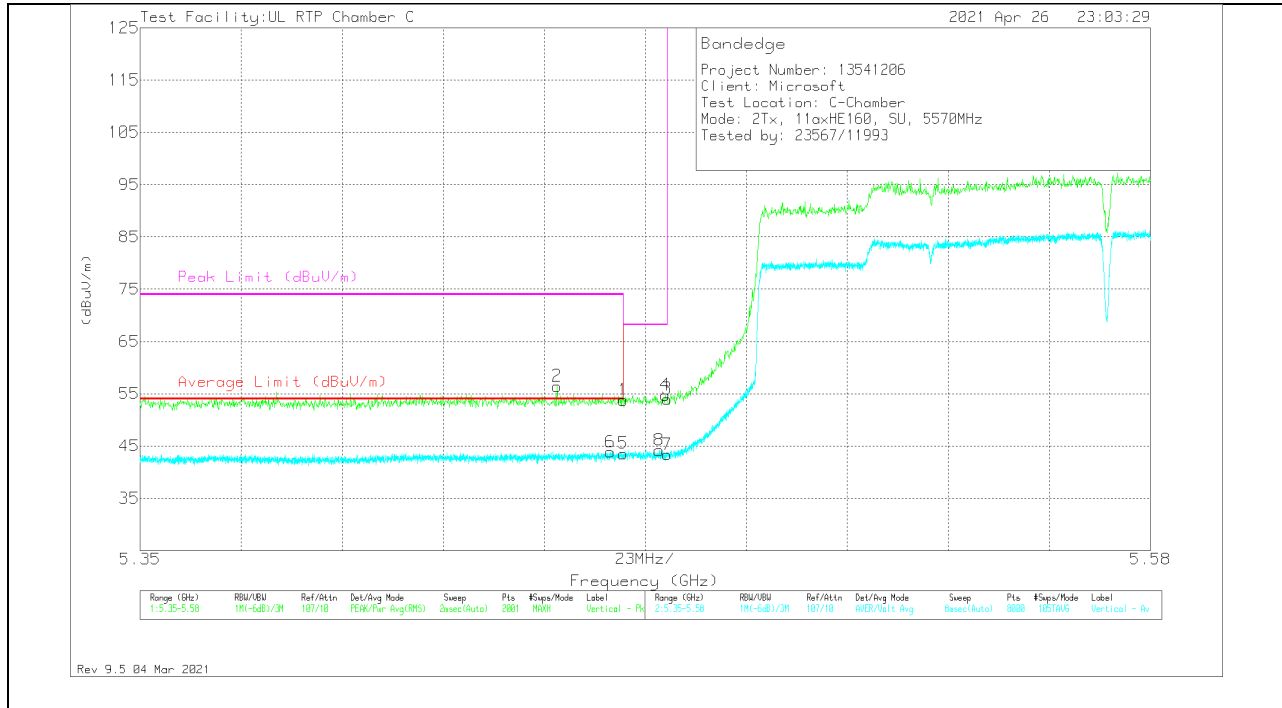

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45994	32.1	Pk	34.8	-13.1	0	53.8	-	-	74	-20.2	22	267	V
2	* ** 5.44488	34.84	Pk	34.8	-13.2	0	56.44	-	-	74	-17.56	22	267	V
5	* ** 5.45998	21.4	ADV	34.8	-13.1	.46	43.56	54	-10.44	-	-	22	267	V
6	* ** 5.45702	21.8	ADV	34.8	-13.2	.46	43.86	54	-10.14	-	-	22	267	V
8	5.46815	22.13	ADV	34.8	-13.2	.46	44.19	-	-	-	-	22	267	V
4	5.4696	33.15	Pk	34.8	-13.2	0	54.75	-	-	68.2	-13.45	22	267	V
3	5.46995	32.42	Pk	34.8	-13.2	0	54.02	-	-	68.2	-14.18	22	267	V
7	5.46999	21.3	ADV	34.8	-13.2	.46	43.36	-	-	-	-	22	267	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 1 OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL LOW EDGE)


HORIZONTAL RESULT

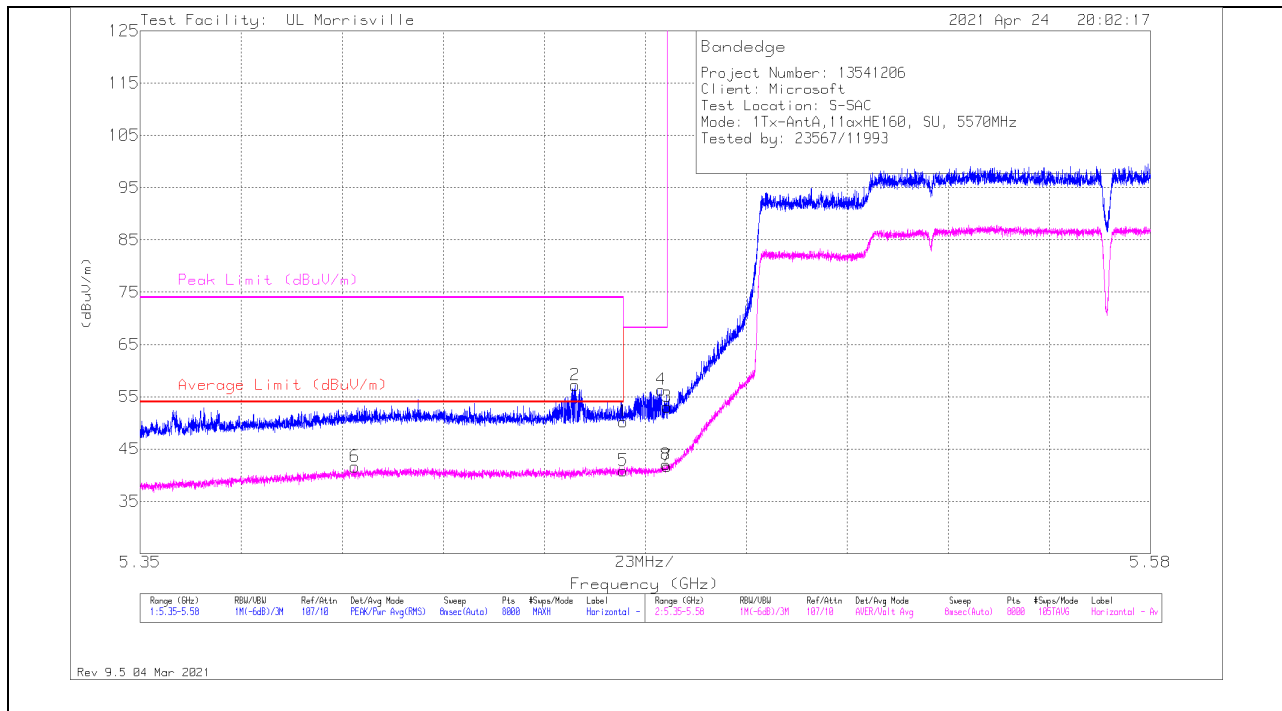

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	39.25	Pk	34.5	-23.5	0	50.25	-	-	74	-23.75	212	306	H
2	* ** 5.44906	46.11	Pk	34.5	-23.4	0	57.21	-	-	74	-16.79	212	306	H
5	* ** 5.45998	29.4	ADV	34.5	-23.5	.46	40.86	54	-13.14	-	-	212	305	H
6	* ** 5.39888	29.96	ADV	34.5	-23.3	.46	41.62	54	-12.38	-	-	212	305	H
4	5.46861	45.35	Pk	34.5	-23.5	0	56.35	-	-	68.2	-11.85	212	306	H
8	5.46967	30.55	ADV	34.5	-23.5	.46	42.01	-	-	-	-	212	305	H
3	5.46999	42.08	Pk	34.5	-23.5	0	53.08	-	-	68.2	-15.12	212	306	H
7	5.46999	30.26	ADV	34.5	-23.5	.46	41.72	-	-	-	-	212	305	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

VERTICAL RESULT

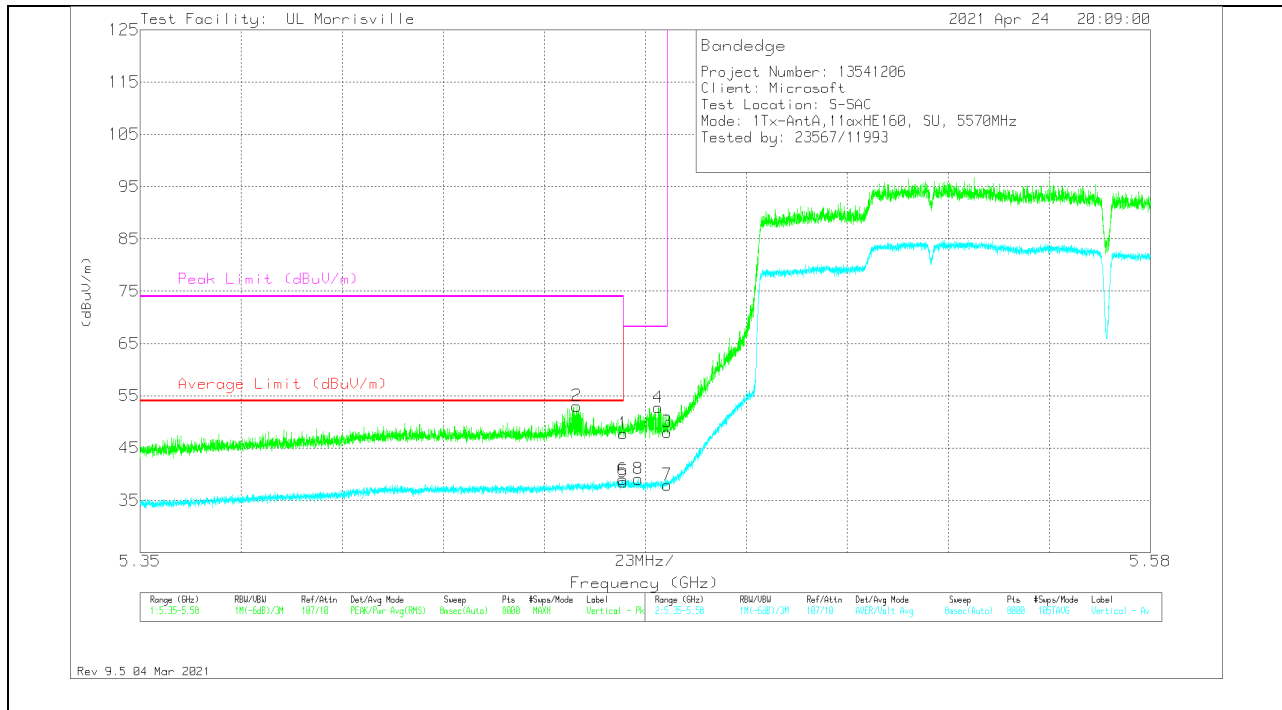

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	36.77	Pk	34.5	-23.5	0	47.77	-	-	74	-26.23	186	241	V
2	* ** 5.44937	41.96	Pk	34.5	-23.4	0	53.06	-	-	74	-20.94	186	241	V
5	* ** 5.45998	27.06	ADV	34.5	-23.5	.46	38.52	54	-15.48	-	-	186	241	V
6	* ** 5.4599	27.53	ADV	34.5	-23.5	.46	38.99	54	-15.01	-	-	186	241	V
8	5.46343	27.62	ADV	34.5	-23.5	.46	39.08	-	-	-	-	186	241	V
4	5.46798	41.83	Pk	34.5	-23.6	0	52.73	-	-	68.2	-15.47	186	241	V
3	5.46999	37.06	Pk	34.5	-23.5	0	48.06	-	-	68.2	-20.14	186	241	V
7	5.46999	26.48	ADV	34.5	-23.5	.46	37.94	-	-	-	-	186	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

1TX Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

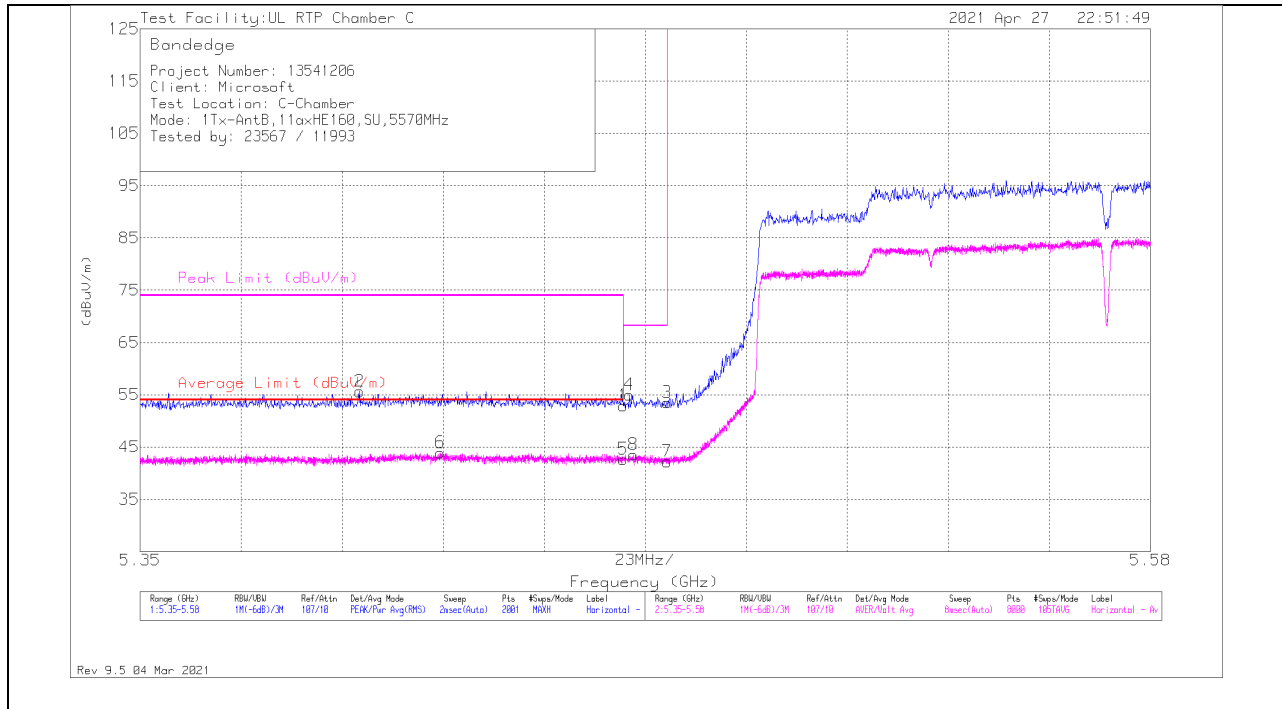

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45994	31.23	Pk	34.8	-13.1	0	52.93	-	-	74	-21.07	243	273	H
2	*** 5.40003	34.73	Pk	34.8	-13.9	0	55.63	-	-	74	-18.37	243	273	H
5	*** 5.45998	20.5	ADV	34.8	-13.1	.46	42.66	54	-11.34	-	-	243	273	H
6	*** 5.41835	22.05	ADV	34.8	-13.4	.46	43.91	54	-10.09	-	-	243	273	H
4	5.46132	33.29	Pk	34.8	-13.1	0	54.99	-	-	68.2	-13.21	243	273	H
8	5.46228	21.36	ADV	34.8	-13.1	.46	43.52	-	-	-	-	243	273	H
3	5.46995	31.89	Pk	34.8	-13.2	0	53.49	-	-	68.2	-14.71	243	273	H
7	5.46999	20.17	ADV	34.8	-13.2	.46	42.23	-	-	-	-	243	273	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

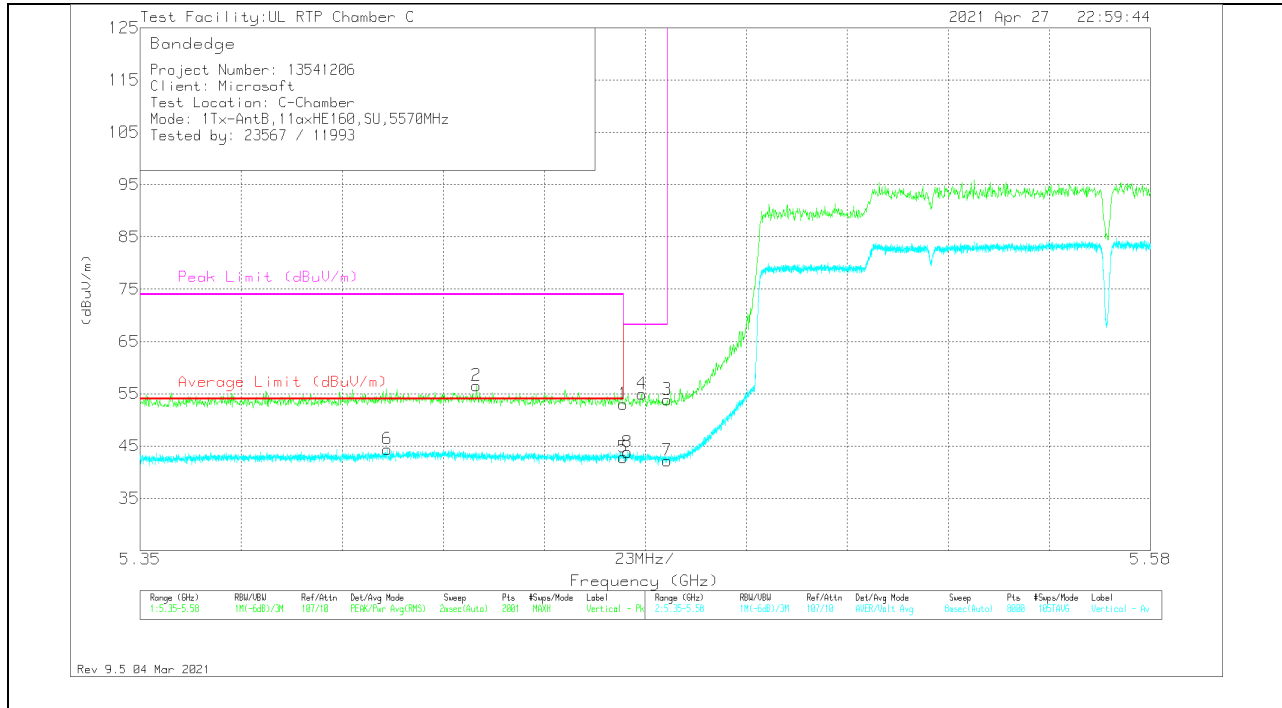

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45994	31.33	Pk	34.8	-13.1	0	53.03	-	-	74	-20.97	208	203	V
2	* ** 5.42659	35.17	Pk	34.8	-13.4	0	56.57	-	-	74	-17.43	208	203	V
5	* ** 5.45998	20.69	ADV	34.8	-13.1	.46	42.85	54	-11.15	-	-	208	203	V
6	* ** 5.40624	22.74	ADV	34.8	-13.6	.46	44.4	54	-9.6	-	-	208	203	V
8	5.46093	21.67	ADV	34.8	-13.1	.46	43.83	-	-	-	-	208	203	V
4	5.4642	33.29	Pk	34.8	-13.1	0	54.99	-	-	68.2	-13.21	208	203	V
3	5.46995	32.28	Pk	34.8	-13.2	0	53.88	-	-	68.2	-14.32	208	203	V
7	5.46999	20.15	ADV	34.8	-13.2	.46	42.21	-	-	-	-	208	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

ADV - Linear Voltage Average

2TX Antenna 1 + Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL HIGH EDGE)


HORIZONTAL RESULT

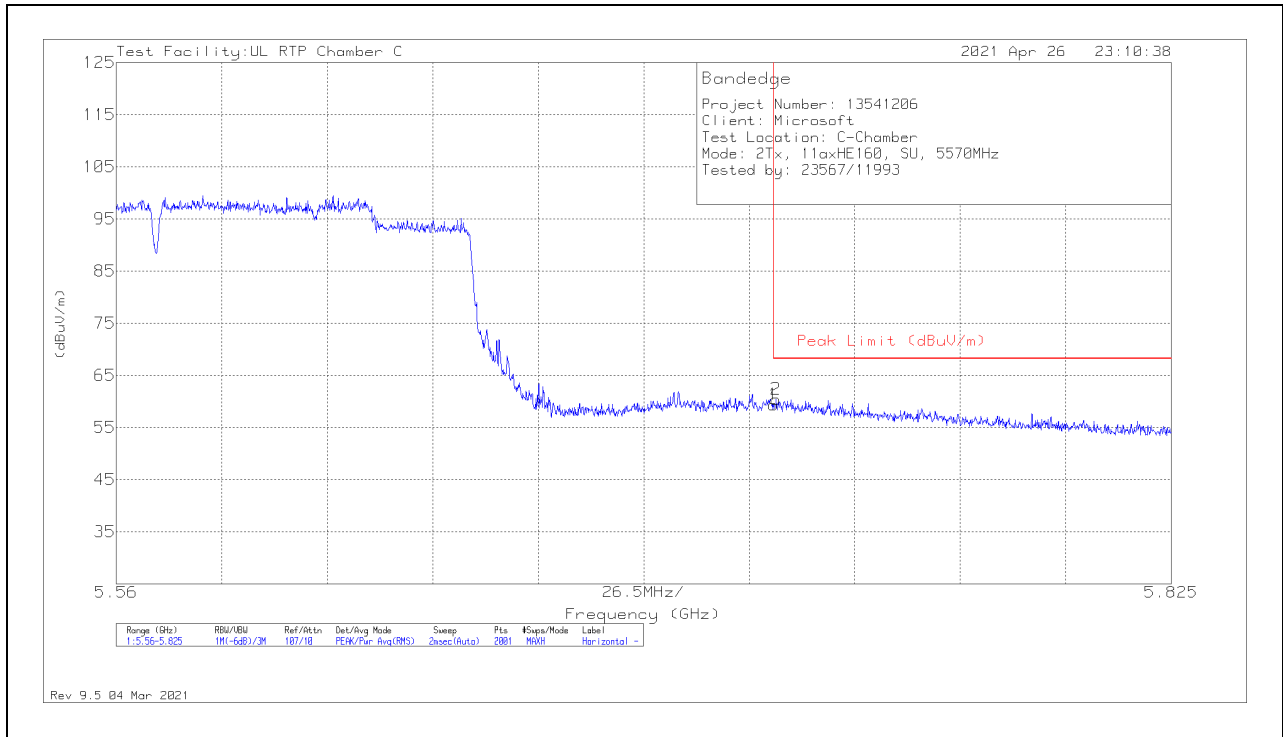

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	37.17	Pk	34.8	-12.6	59.37	68.2	-8.83	25	211	H
2	5.72576	38.22	Pk	34.8	-12.6	60.42	68.2	-7.78	25	211	H

Pk - Peak detector

VERTICAL RESULT

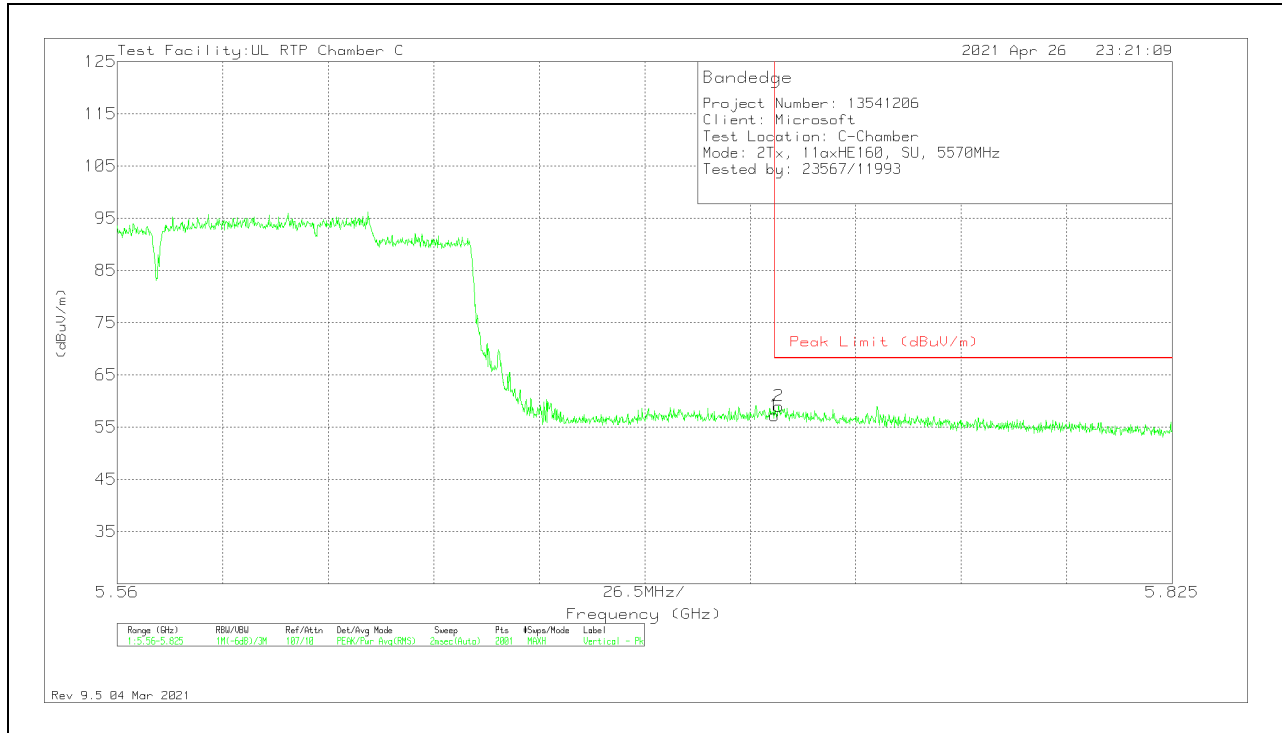


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	35.02	Pk	34.8	-12.6	57.22	68.2	-10.98	10	252	V
2	5.72616	36.81	Pk	34.8	-12.6	59.01	68.2	-9.19	10	252	V

Pk - Peak detector

1TX Antenna 1 OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL HIGH EDGE)


HORIZONTAL RESULT

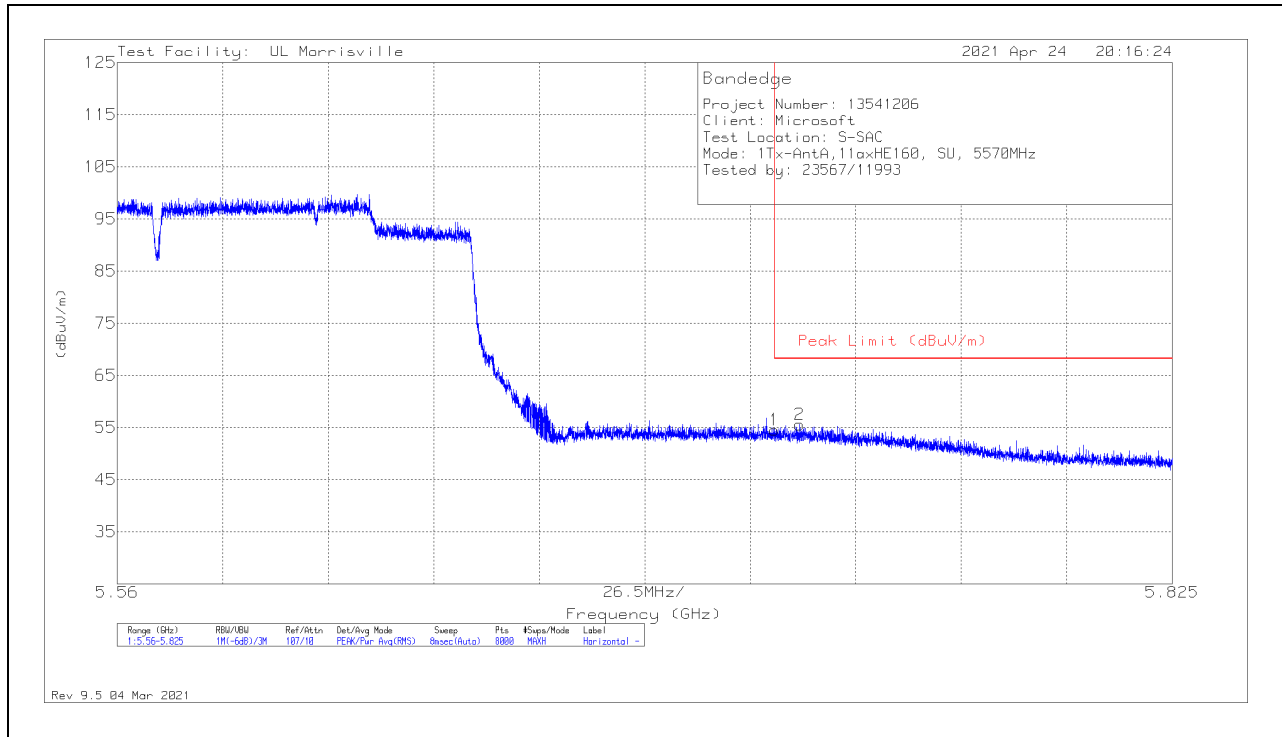

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	43.41	Pk	34.6	-23.5	54.51	68.2	-13.69	227	260	H
2	5.73134	44.44	Pk	34.6	-23.5	55.54	68.2	-12.66	227	260	H

Pk - Peak detector

VERTICAL RESULT

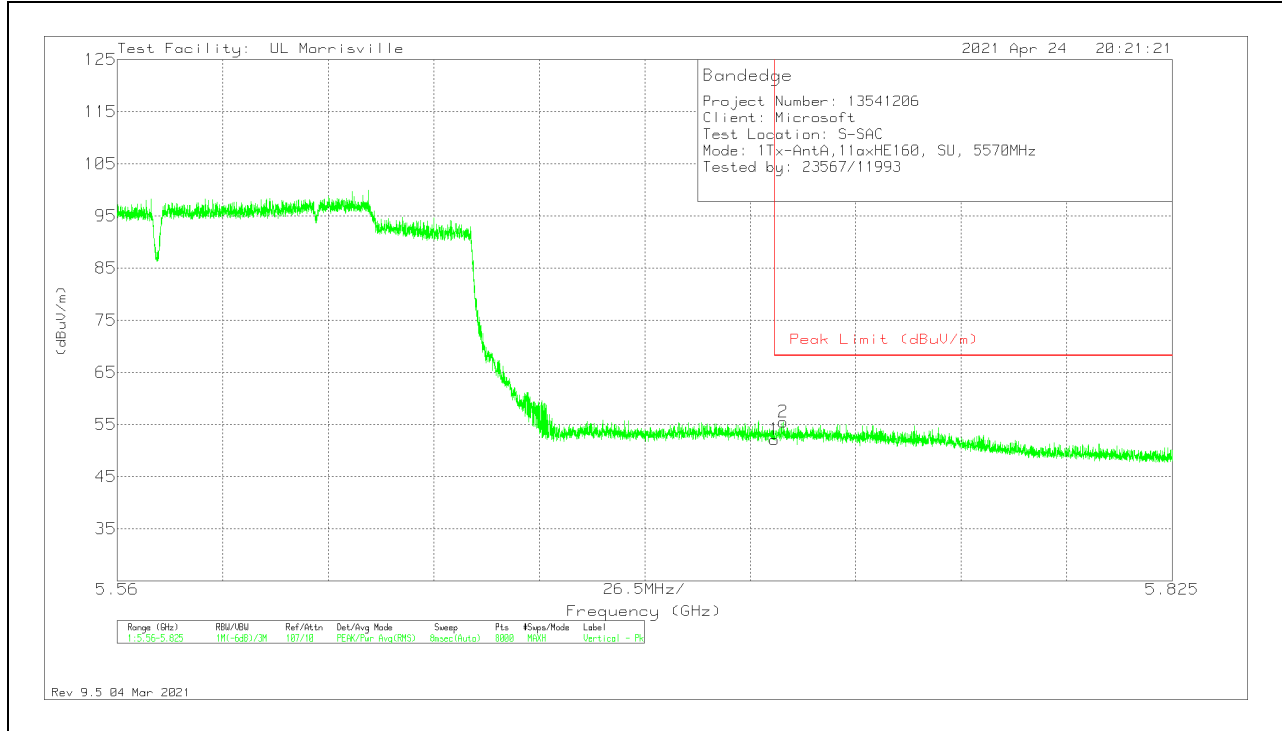


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	41.01	Pk	34.6	-23.5	52.11	68.2	-16.09	208	156	V
2	5.7273	44.4	Pk	34.6	-23.5	55.5	68.2	-12.7	208	156	V

Pk - Peak detector

1TX Antenna 2 OFDMA MODE: SU, Single User

BANDEDGE (MID CHANNEL HIGH EDGE)


HORIZONTAL RESULT

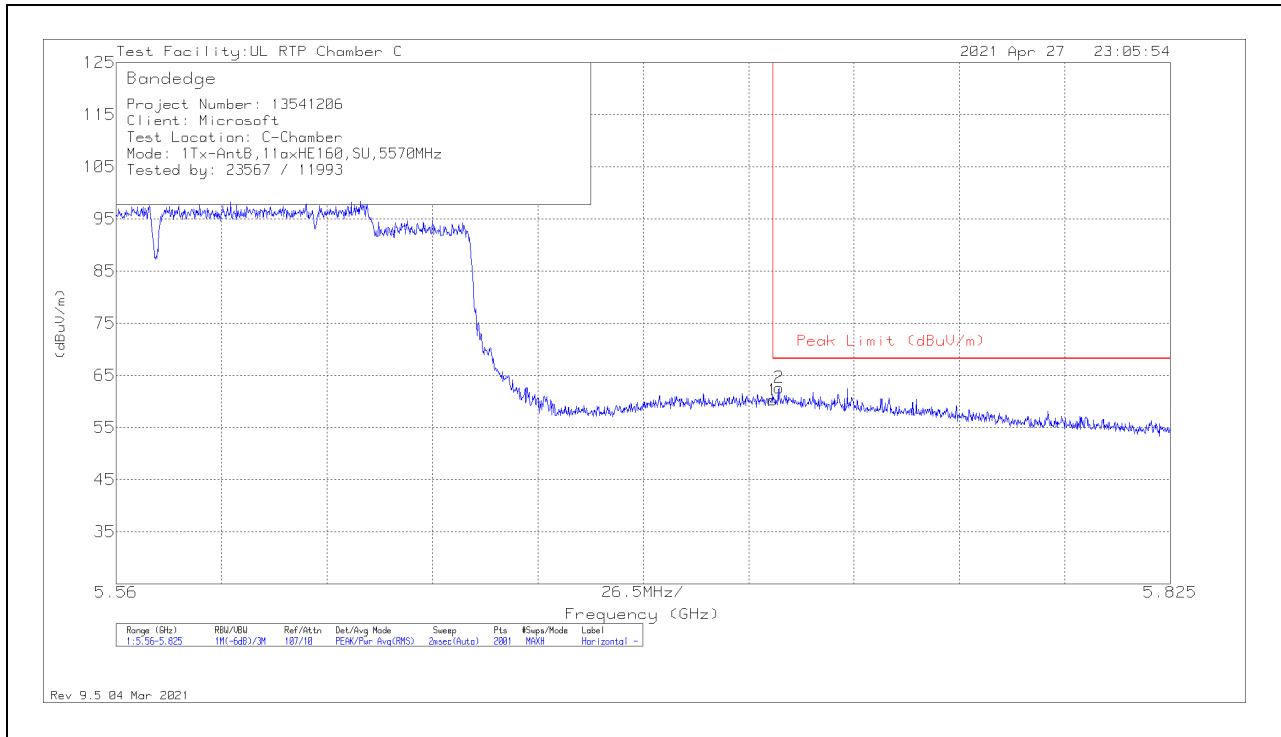

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	38.07	Pk	34.8	-12.6	60.27	68.2	-7.93	195	201	H
2	5.72669	40.43	Pk	34.8	-12.6	62.63	68.2	-5.57	195	201	H

Pk - Peak detector

VERTICAL RESULT

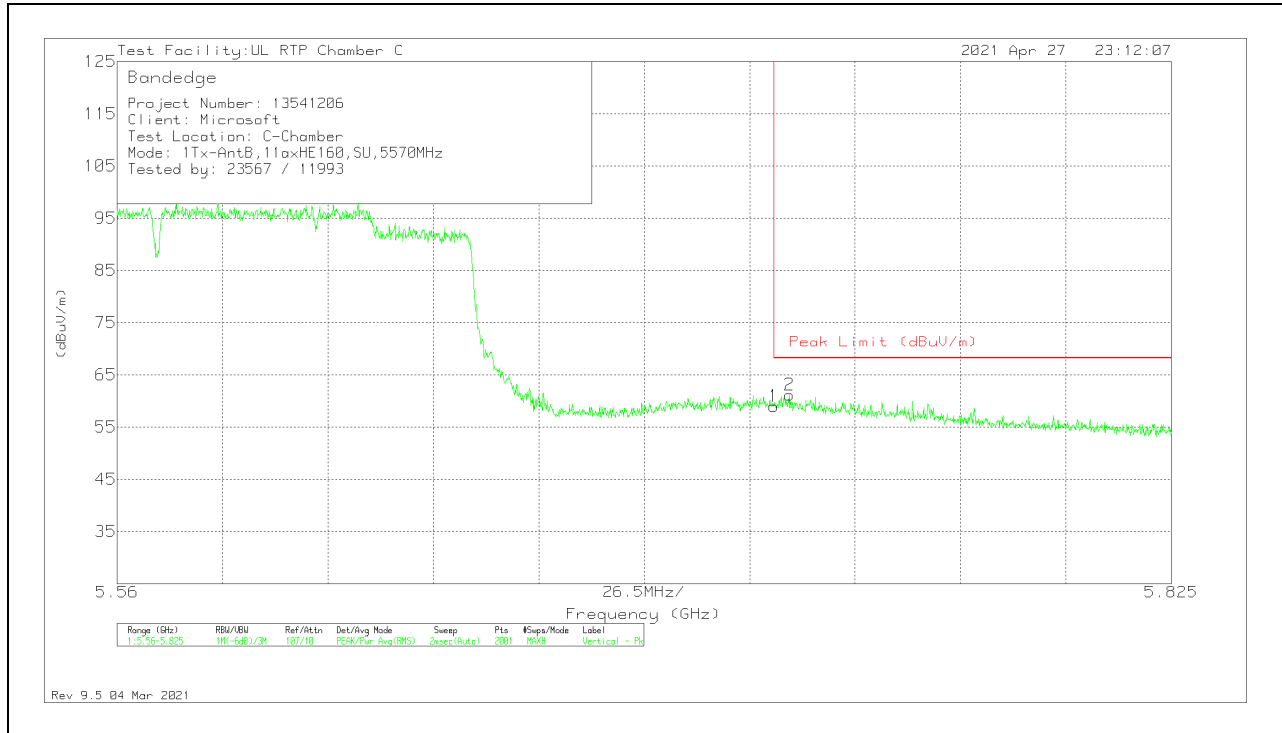

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.7251	36.78	Pk	34.8	-12.6	58.98	68.2	-9.22	239	195	V
2	5.72907	38.97	Pk	34.8	-12.6	61.17	68.2	-7.03	239	195	V

Pk - Peak detector

11. SETUP PHOTOS:

Please refer to R13541206-EP2 for setup photos.

END OF TEST REPORT