

### Dongle 3DH5 2480\_Verical-Front 5mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2480 MHz;

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.859$  S/m;  $\epsilon_r = 38.508$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (6x6x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.298 W/kg


**Configuration/Body/Zoom Scan (8x8x6)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 7.613 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.729 W/kg

**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.285 W/kg

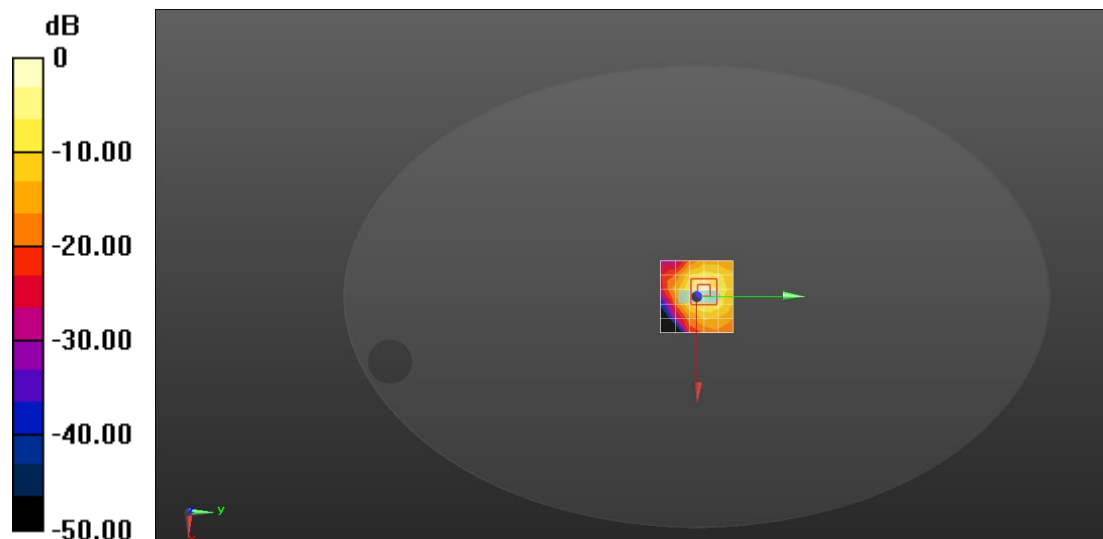

0 dB = 0.298 W/kg = -5.26 dBW/kg