

10
829.0
1/49
10
838.9
1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit (dBm)	Margin [dB]
1658.0	Н	-	-	-76.73	-2.46	27.81	-67.45	-13.00	-54.45
2487.0	Н	147	315	-75.47	2.06	33.59	-61.67	-13.00	-48.67
3316.0	Н	-	-	-77.26	2.41	32.15	-63.11	-13.00	-50.11
4145.0	Н	-	-	-78.11	3.12	32.01	-63.25	-13.00	-50.25
4974.0	Н	-	-	-78.80	4.63	32.83	-62.42	-13.00	-49.42

### Table 7-19. Radiated Spurious Data (ULCA LTE Band 5 – Low Channel – South - Open)

PCC Bandwidth (MHz):	10
PCC Frequency (MHz):	831.5
PCC RB / Offset:	1/49
SCC Bandwidth (MHz):	10
SCC Frequency (MHz):	841.4
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1663.0	Н	147	133	-75.30	-2.41	29.29	-65.97	-13.00	-52.97
2494.5	Н	180	1	-74.71	2.13	34.42	-60.84	-13.00	-47.84
3326.0	Н	-	-	-77.24	2.41	32.17	-63.09	-13.00	-50.09
4157.5	Н	-	-	-78.36	3.28	31.92	-63.34	-13.00	-50.34
4989.0	Н	-	-	-78.81	4.68	32.87	-62.39	-13.00	-49.39

Table 7-20. Radiated Spurious Data (ULCA LTE Band 5 – Mid Channel – South – Open)

PCC Bandwidth (MHz):	10
PCC Frequency (MHz):	844.0
PCC RB / Offset:	1/0
SCC Bandwidth (MHz):	10
SCC Frequency (MHz):	834.1
SCC RB / Offset:	1/49


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1688.0	Н	-	-	-76.55	-1.95	28.50	-66.76	-13.00	-53.76
2532.0	Н	182	347	-75.53	2.23	33.70	-61.56	-13.00	-48.56
3376.0	Н	-	-	-77.35	2.28	31.93	-63.33	-13.00	-50.33
4220.0	Н	-	-	-77.91	3.17	32.26	-63.00	-13.00	-50.00
5064.0	Н	-	-	-78.89	5.12	33.23	-62.02	-13.00	-49.02


#### Table 7-21. Radiated Spurious Data (ULCA LTE Band 5 – High Channel – South – Open)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dage 95 of 107	
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 85 of 107	
© 2021 PCTEST	•			V2 4/7/2021	



### NR Band n5 – North

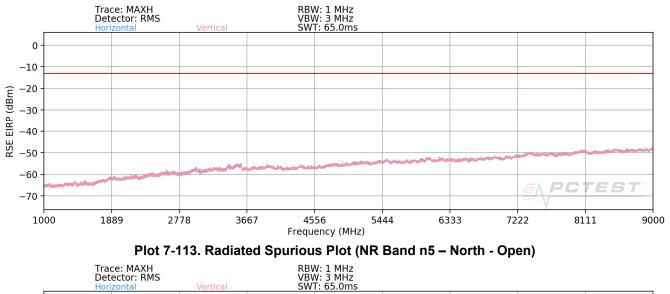

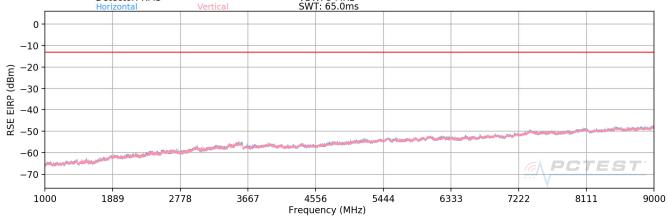



20
834.0
1/53
SA

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1668.0	Н	124	228	-77.54	-5.47	23.99	-71.27	-13.00	-58.27
2502.0	Н	119	201	-77.74	-2.60	26.66	-68.59	-13.00	-55.59
3336.0	Н	-	-	-77.94	0.33	29.39	-65.86	-13.00	-52.86
4170.0	Н	-	-	-78.52	1.95	30.43	-64.83	-13.00	-51.83
5004.0	Н	-	-	-79.56	3.94	31.38	-63.87	-13.00	-50.87

Table 7-22. Radiated Spurious Data (NR Band n5 – Low Channel – North - Open)

FCC ID: C3K1995	PCTEST Proud to be part of @ element	PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 96 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset	Page 86 of 107	
© 2021 PCTEST		•		V2 4/7/2021



Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1/53
Mode:	SA

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.0	Н	161	110	-76.72	-5.40	24.88	-70.38	-13.00	-57.38
2509.5	Н	-	-	-77.45	-2.54	27.01	-68.25	-13.00	-55.25
3346.0	Н	-	-	-77.92	0.30	29.38	-65.87	-13.00	-52.87
4182.5	Н	-	-	-78.41	2.02	30.61	-64.65	-13.00	-51.65

Table 7-23. Radiated Spurious Data (NR Band n5 – Mid Channel – North - Open)


Bandwidth (MHz):	20
Frequency (MHz):	839.0
RB / Offset:	1/53
Mode:	SA

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1678.0	Н	123	330	-77.27	-5.33	24.40	-70.86	-13.00	-57.86
2517.0	Н	-	-	-77.41	-2.33	27.26	-67.99	-13.00	-54.99
3356.0	Н	-	-	-78.26	0.28	29.02	-66.24	-13.00	-53.24
4195.0	Н	-	-	-78.40	1.95	30.55	-64.71	-13.00	-51.71

Table 7-24. Radiated Spurious Data (NR Band n5 – High Channel – North - Open)

FCC ID: C3K1995	PCTEST: Prout to be part of @ element	PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dege 97 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 87 of 107
© 2021 PCTEST	*			V2 4/7/2021



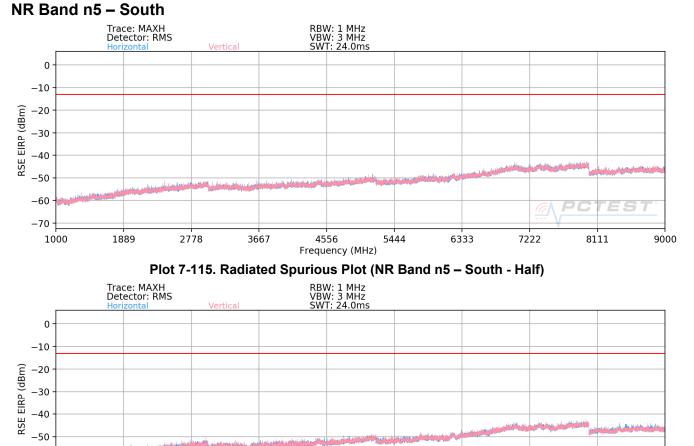

1889	2778	3667 Fr	4556 equency (MHz)	5444	6333	7222	8111
Plot	7-116. Rad	iated Spuri	ous Plot (N	R Band n5	- South - C	Open)	

PC

ES

9000

Bandwidth (MHz):	20
Frequency (MHz):	834.0
RB / Offset:	1/53
Mode:	Standalone

-60

-70

1000

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1668.0	Н	-	-	-76.85	-0.35	29.80	-65.46	-13.00	-52.46
2502.0	Н	-	-	-77.89	3.50	32.61	-62.65	-13.00	-49.65
3336.0	Н	-	-	-78.42	4.95	33.53	-61.73	-13.00	-48.73

Table 7-25. Radiated Spurious Data (NR Band n5 – Low Channel – South - Half)

FCC ID: C3K1995	PCTEST. Proud to be paid of generated	PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dama 00 of 407
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 88 of 107
© 2021 PCTEST				V2 4/7/2021



Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1/53
Mode:	Standalone
induct.	Standarone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit (dBm)	Margin [dB]
1673.0	Н	212	179	-76.97	-0.23	29.80	-65.46	-13.00	-52.46
2509.5	Н	-	-	-78.26	3.55	32.29	-62.97	-13.00	-49.97
3346.0	Н	-	-	-79.73	5.04	32.31	-62.95	-13.00	-49.95
4182.5	Н	-	-	-79.07	5.77	33.70	-61.56	-13.00	-48.56

Table 7-26. Radiated Spurious Data (NR Band n5 – Mid Channel – South - Half)


Bandwidth (MHz):	20
Frequency (MHz):	839.0
RB / Offset:	1/53
Mode:	Standalone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1678.0	Н	-	-	-77.02	-0.12	29.86	-65.40	-13.00	-52.40
2517.0	Н	-	-	-77.74	3.60	32.86	-62.40	-13.00	-49.40
3356.0	Н	-	-	-78.33	5.12	33.79	-61.46	-13.00	-48.46

Table 7-27. Radiated Spurious Data (NR Band n5 – High Channel – South - Half)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dage 90 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 89 of 107
© 2021 PCTEST		•		V2 4/7/2021




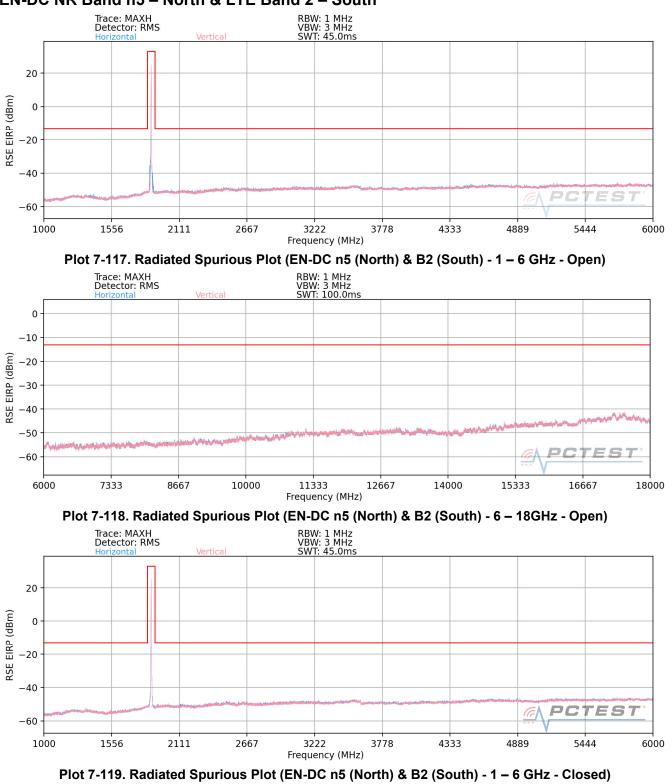


# EN-DC NR Band n5 – North & LTE Band 2 – South

FCC ID: C3K1995	PCTEST Proud to be part of @ viennest	PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dego 00 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 90 of 107
© 2021 PCTEST	•			V2 4/7/2021



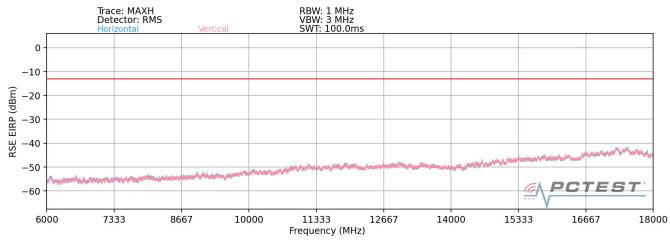




Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	EN-DC
Anchor Band:	LTE B2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1250.5	Н	-	-	-76.55	6.79	37.24	-58.01	-13.00	-45.01
2294.0	Н	-	-	-77.38	9.80	39.42	-55.84	-13.00	-42.84
2923.5	Н	-	-	-77.43	11.64	41.21	-54.04	-13.00	-41.04

Table 7-28. Radiated Spurious Data (EN-DC n5 (North) – B2 (South) - Open)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 01 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 91 of 107
© 2021 PCTEST				V2 4/7/2021




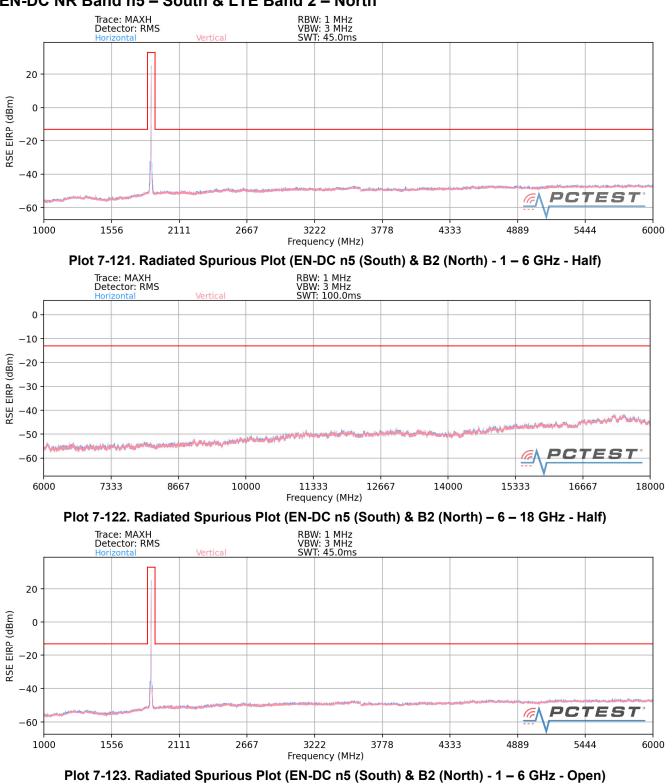

<b>EN-DC NR</b>	Band n5 -	- South &	I TF Band	12 – North

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 92 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Fage 92 01 107
© 2021 PCTEST	•			V2 4/7/2021



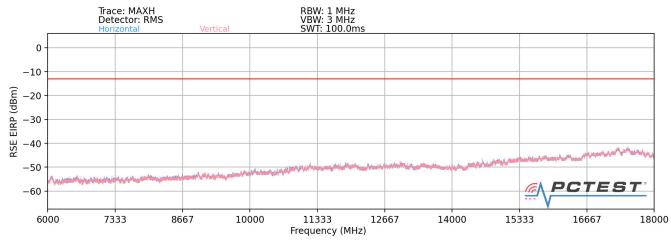




Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	EN-DC
Anchor Band:	LTE B2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1250.5	Н	-	-	-76.46	6.79	37.33	-57.92	-13.00	-44.92
2294.0	Н	-	-	-77.35	9.80	39.45	-55.81	-13.00	-42.81
2923.5	Н	-	-	-77.55	11.64	41.09	-54.16	-13.00	-41.16

Table 7-29. Radiated Spurious Data (EN-DC n5 (South) - B2 (North) - Half)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 02 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 93 of 107
© 2021 PCTEST	÷	•		V2 4/7/2021



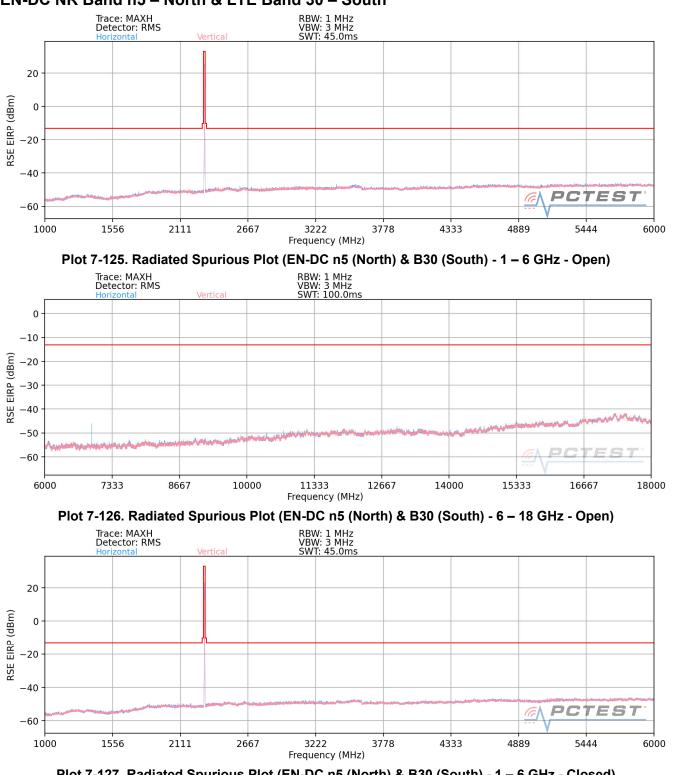


# EN-DC NR Band n5 – North & LTE Band 30 – South

Plot 7-127. Radiated Spurious Plot (EN-DC n5 (North) & B30 (South) - 1 – 6 GHz - Closed)

FCC ID: C3K1995		PARI 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 04 of 107
1M2105200048-02-R1.C3K	8-02-R1.C3K 5/25- 8/10/2021 Portable Handset			Page 94 of 107
© 2021 PCTEST				V2 4/7/2021



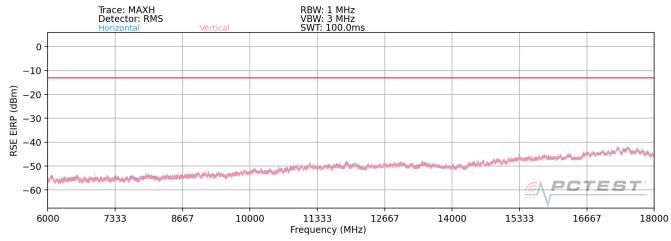




Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	EN-DC
Anchor Band:	LTE B30
Anchor Band:	LTE B30

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
2110.5	Н	-	-	-80.36	9.66	36.30	-58.96	-13.00	-45.96
3584.0	Н	-	-	-77.58	12.11	41.53	-53.73	-13.00	-40.73
3783.5	Н	178	37	-76.71	12.75	43.04	-52.21	-13.00	-39.21
6531.0	Н	-	-	-79.85	7.48	34.63	-60.63	-13.00	-47.63
6930.5	Н	147	88	-67.12	7.57	47.45	-47.80	-13.00	-34.80
8004.5	Н	-	-	-80.59	8.97	35.38	-59.88	-13.00	-46.88

Table 7-30. Radiated Spurious Data (EN-DC n5 (North) - B30 (South) - Open)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dage 05 of 107	
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 95 of 107	
© 2021 PCTEST				V2 4/7/2021	



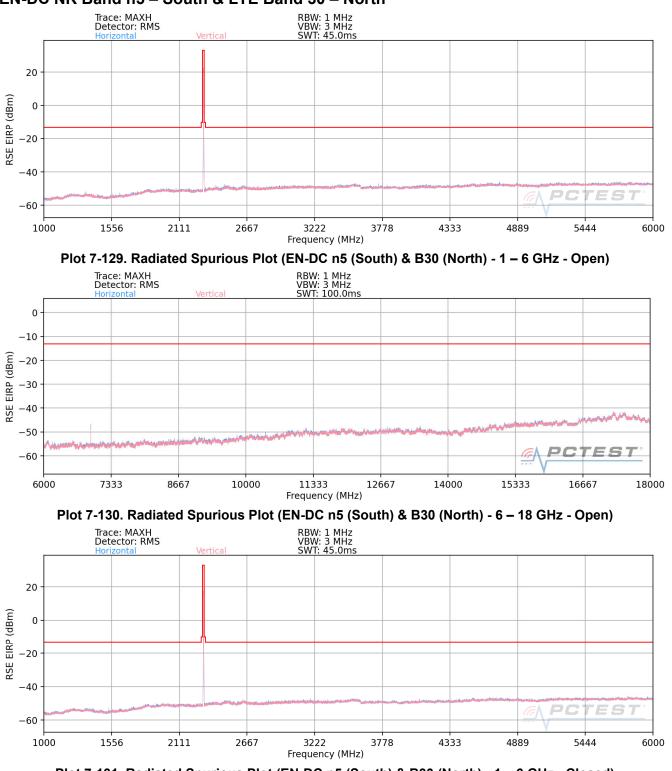


EN-DC NR Band n5 – South & LTE Band 30 – North

Plot 7-131. Radiated Spurious Plot (EN-DC n5 (South) & B30 (North) - 1 – 6 GHz - Closed)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dage 06 of 107	
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 96 of 107	
© 2021 PCTEST	·			V2 4/7/2021	



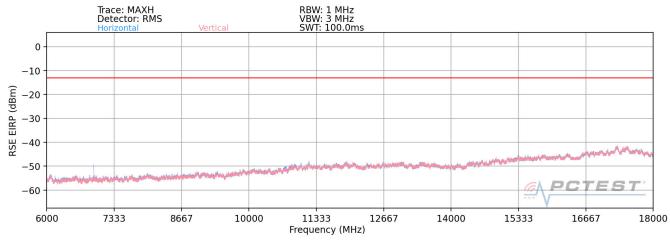



Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	EN-DC
Anchor Band:	LTE B30


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
2110.5	Н	-	-	-80.15	9.66	36.51	-58.75	-13.00	-45.75
3584.0	Н	-	-	-77.36	12.11	41.75	-53.51	-13.00	-40.51
3783.5	Н	400	5	-77.34	12.75	42.41	-52.84	-13.00	-39.84
6531.0	Н	-	-	-79.93	7.48	34.55	-60.71	-13.00	-47.71
6930.5	Н	175	7	-62.73	7.57	51.84	-43.41	-13.00	-30.41
8004.5	Н	-	-	-80.64	8.97	35.33	-59.93	-13.00	-46.93

Table 7-31. Radiated Spurious Data (EN-DC n5 (South) – B30 (North) - Open)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dego 07 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 97 of 107
© 2021 PCTEST				V2 4/7/2021



### GSM/GPRS Cell – South

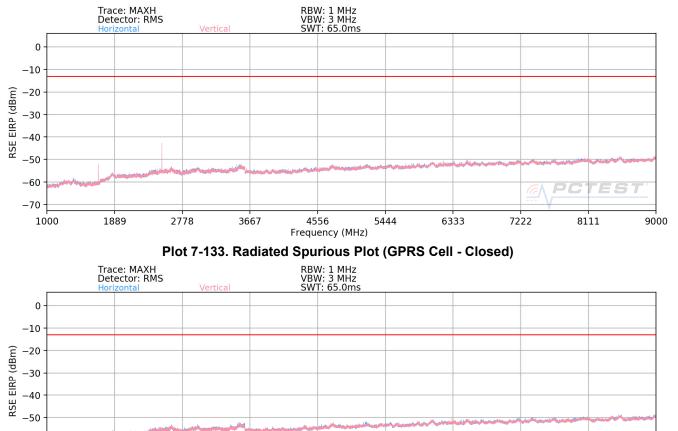

Plot 7-134. Radiated Spurious Plot (GPRS Cell - Half)								
			Frequency (M	lHz)				
1889	2778	3667	4556	5444	6333	7222		

PC

8111

TES7

9000

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

-60

-70 <u>|</u> 1000

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.4	Н	185	352	-60.14	-2.58	44.28	-50.97	-13.00	-37.97
2472.6	Н	124	47	-58.16	1.99	50.83	-44.43	-13.00	-31.43
3296.8	Н	389	139	-72.55	2.47	36.92	-58.33	-13.00	-45.33
4121.0	Н	-	-	-75.46	3.44	34.98	-60.28	-13.00	-47.28
4945.2	н	-	-	-76.27	4.95	35.68	-59.58	-13.00	-46.58
5769.4	Н	-	-	-76.01	6.15	37.14	-58.12	-13.00	-45.12
6593.6	Н	205	15	-75.13	7.10	38.97	-56.29	-13.00	-43.29
7417.8	Н	-	-	-77.76	8.24	37.48	-57.78	-13.00	-44.78

### Table 7-32. Radiated Spurious Data (GPRS Cell – Low Channel - Closed)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dega 09 of 107	
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 98 of 107	
© 2021 PCTEST		·		V2 4/7/2021	



Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	Н	257	307	-59.45	-2.27	45.28	-49.97	-13.00	-36.97
2509.8	Н	148	122	-56.81	2.22	52.41	-42.84	-13.00	-29.84
3346.4	Н	379	30	-69.73	2.42	39.69	-55.57	-13.00	-42.57
4183.0	Н	126	329	-73.15	3.46	37.31	-57.95	-13.00	-44.95
5019.6	Н	-	-	-76.70	5.32	35.62	-59.64	-13.00	-46.64
5856.2	н	-	-	-77.35	6.66	36.31	-58.95	-13.00	-45.95
6692.8	Н	245	56	-75.38	7.23	38.85	-56.41	-13.00	-43.41
7529.4	Н	-	-	-77.66	7.87	37.21	-58.05	-13.00	-45.05
	Table 7 22	Dadiatad	Souriou	o Doto (C		Mid Ch	annal - Clasad	1/	

Table 7-33. Radiated Spurious Data (GPRS Cell – Mid Channel - Closed)


Mode:	GPRS 1 Tx Slot
Channel:	251
Frequency (MHz):	848.8


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.6	Н	146	348	-60.08	-1.68	45.24	-50.02	-13.00	-37.02
2546.4	Н	152	46	-53.18	2.45	56.27	-38.99	-13.00	-25.99
3395.2	Н	323	32	-70.43	2.39	38.96	-56.30	-13.00	-43.30
4244.0	Н	362	359	-66.77	3.67	43.90	-51.35	-13.00	-38.35
5092.8	Н	-	-	-76.42	5.43	36.01	-59.25	-13.00	-46.25
5941.6	Н	-	-	-77.39	6.52	36.13	-59.13	-13.00	-46.13
6790.4	Н	-	-	-77.29	7.48	37.19	-58.06	-13.00	-45.06
7639.2	Н	-	-	-78.03	8.81	37.78	-57.48	-13.00	-44.48

Table 7-34. Radiated Spurious Data (GPRS Cell – High Channel - Closed)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dage 00 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 99 of 107
© 2021 PCTEST	•			V2 4/7/2021



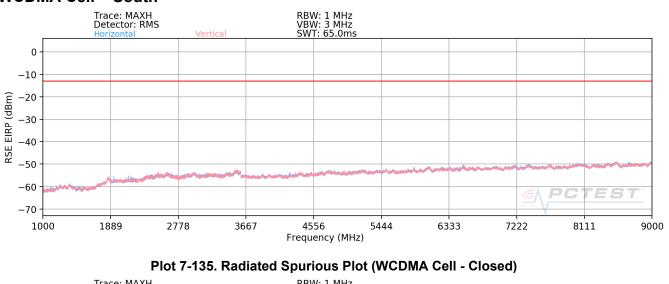

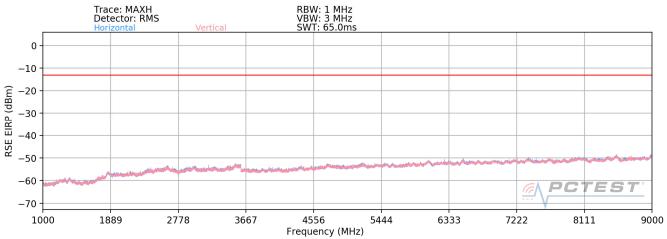



Mode: Channel:		IA RMC							
Frequency (MHz):	82	6.4							
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.8	Н	-	-	-77.15	-2.52	27.33	-67.93	-13.00	-54.93
2479.2	Н	163	347	-75.30	2.03	33.73	-61.53	-13.00	-48.53
3305.6	Н	-	-	-78.04	2.42	31.38	-63.88	-13.00	-50.88
4132.0	Н	-	-	-78.35	3.25	31.90	-63.36	-13.00	-50.36

Table 7-35. Radiated Spurious Data (WCDMA Cell – Low Channel - Closed)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 100 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 100 of 107
© 2021 PCTEST	•			V2 4/7/2021



Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	Н	-	-	-77.20	-2.27	27.53	-67.72	-13.00	-54.72
2509.8	Н	127	150	-76.24	2.22	32.98	-62.27	-13.00	-49.27
3346.4	Н	-	-	-77.99	2.42	31.43	-63.83	-13.00	-50.83
4183.0	Н	-	-	-78.49	3.46	31.97	-63.29	-13.00	-50.29

Table 7-36. Radiated Spurious Data (WCDMA Cell – Mid Channel - Closed)

Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.2	Н	320	13	-76.64	-1.82	28.54	-66.71	-13.00	-53.71
2539.8	Н	314	143	-77.62	2.33	31.71	-63.55	-13.00	-50.55
3386.4	Н	-	-	-77.82	2.32	31.50	-63.75	-13.00	-50.75
4233.0	Н	-	-	-78.03	3.38	32.35	-62.91	-13.00	-49.91

Table 7-37. Radiated Spurious Data (WCDMA Cell – High Channel - Closed)

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dage 101 of 107
1M2105200048-02-R1.C3K	5/25-8/10/2021	Portable Handset		Page 101 of 107
© 2021 PCTEST				V2 4/7/2021



### 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

#### Test Procedure Used

ANSI/TIA-603-E-2016

#### Test Settings

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

#### Test Notes


None

FCC ID: C3K1995	PCTEST. Proud to be part of @ electrect	PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 102 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 102 of 107
© 2021 PCTEST				V/2 4/7/2021



LTE Band	26/5				
	Operating	Frequency (Hz):	838,5	00,000	1
	Ref	Voltage (VDC):	ه	24	1
		Deviation Limit:	± 0.00025%	or 2.5 ppm	
-					-
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
		- 30	620,489,322	724	3.0000962
		- 23	620,467,278	-25	-3.3333288
		- 13	820,487,880	329	3.0000428
		3	625,487,682	224	2.0000259
100 36	4.24	- 13	825,488,525	686	2.0001072
		+ 20 (Ref)	836,497,628	0	0.0000000
		- 33	825,485,774	-994 -	-3.3331321
		- 43	820,488,728	1,121	3.0001252
		- 53	926,489,497	928	3.0001027
Battary Endpoint	2.73	- 23	920,489,646	1,316	3.0001217

Table 7-38. LTE Band 26/5 Frequency Stability Data

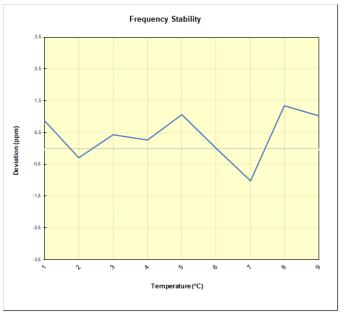


Plot 7-137. LTE Band 26/5 Frequency Stability Chart

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 102 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 103 of 107
© 2021 PCTEST	· · ·			V2 4/7/2021



NR Band n5							
	Operating	Frequency (Hz):	836,500,000				
	Ref. Voltage (VDC):		4.24		1		
		Deviation Limit:	± 0.00025% or 2.5 ppm		1		
					-		
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)		
		- 30	827,041,111	76	0.0000092		
		- 20	827,040,907	-128	-0.0000155		
		- 10	827,040,803	-232	-0.0000281		
		0	827,041,271	236	0.0000285		
100 %	4.24	+ 10	827,040,695	-340	-0.0000411		
		+ 20 (Ref)	827,041,035	0	0.0000000		
		+ 30	827,040,740	-295	-0.0000357		
		+ 40	827,041,628	593	0.0000717		
		+ 50	827,041,498	463	0.0000560		
Battery Endpoint	3.70	+ 20	827,040,699	-336	-0.0000407		

Table 7-39. NR Band n5 Frequency Stability Data

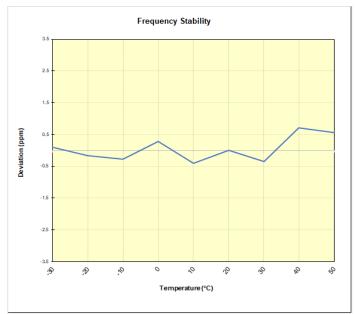


Plot 7-138. NR Band n5 Frequency Stability Chart

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 104 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 104 of 107
© 2021 PCTEST				V2 4/7/2021



GSM/GPRS Cellular							
	Operating	Frequency (Hz):	836,600,000				
	Ref. Voltage (VDC):		4.24				
		Deviation Limit:	± 0.00025% or 2.5 ppm				
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)		
		- 30	836,599,100	-911	-0.0001089		
		- 20	836,598,942	-1,069	-0.0001278		
		- 10	836,600,470	459	0.0000549		
		0	836,599,846	-165	-0.0000198		
100 %	4.24	+ 10	836,599,626	-385	-0.0000460		
		+ 20 (Ref)	836,600,011	0	0.0000000		
		+ 30	836,599,593	-418	-0.0000500		
		+ 40	836,600,262	252	0.0000301		
		+ 50	836,599,409	-602	-0.0000719		
Battery Endpoint	3.70	+ 20	836,599,751	-260	-0.0000311		

Table 7-40. GSM/GPRS Cell Frequency Stability Data

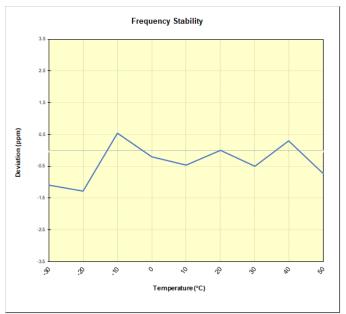


Plot 7-139. GSM/GPRS Cell Frequency Stability Chart

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 105 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 105 of 107
© 2021 PCTEST	· · ·			V2 4/7/2021



WCDMA Cellular							
	Operating	Frequency (Hz):	836,600,000				
	Ref. Voltage (VDC):		4.24				
	Deviation Limit:		± 0.00025% or 2.5 ppm				
					-		
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)		
		- 30	836,600,694	764	0.0000913		
		- 20	836,600,165	234	0.0000280		
		- 10	836,599,383	-547	-0.0000654		
		0	836,600,557	627	0.0000749		
100 %	4.24	+ 10	836,600,413	483	0.0000577		
		+ 20 (Ref)	836,599,930	0	0.0000000		
		+ 30	836,600,615	684	0.0000818		
		+ 40	836,598,642	-1,288	-0.0001540		
		+ 50	836,599,426	-505	-0.0000603		
Battery Endpoint	3.70	+ 20	836,600,475	544	0.0000651		

Table 7-41. WCDMA Cell Frequency Stability Data

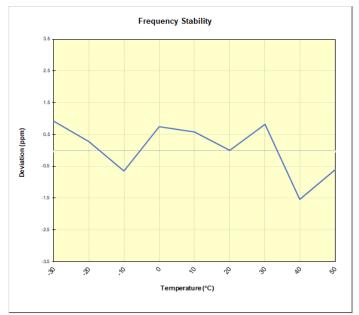

Plot 7-140. WCDMA Cell Frequency Stability Chart

FCC ID: C3K1995		PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 106 of 107
1M2105200048-02-R1.C3K	5/25-8/10/2021	Portable Handset		Page 106 of 107
© 2021 PCTEST				V2 4/7/2021



# 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Microsoft Corporation Portable Handset FCC ID: C3K1995** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: C3K1995	PCTEST. Proud to be post of @ vienness	PART 22 MEASUREMENT REPORT	Microsoft	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:		Dega 107 of 107
1M2105200048-02-R1.C3K	5/25- 8/10/2021	Portable Handset		Page 107 of 107
© 2021 PCTEST				V2 4/7/2021