

PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name: Microsoft Corporation One Microsoft Way Redmond, WA 98052 United States Date of Testing: 9/27/2021 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2109130107-03-R1.C3K Date of Issue: 10/7/2021

FCC ID: C3K1995

APPLICANT: MICROSOFT CORPORATION

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Class II Permissive Change

FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type: Portable Handset

Model: 1995

Test Device Serial No.: Pre-Production Sample [S/N: 18766, 51385]

Class II Permissive Change(s): See FCC Change Document

Original Grant Date: 9/17/2021

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M2109130107-03-R1.C3K) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

The worst-case configurations from the original certification report (Report S/N: 1M2105060048-19.C3K) and Previous Class II Permissive Change Test Report (Report S/N: 1M2109100105-01.C3K) for the associated portable handsets were evaluated with the WPT Sleeve. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested. North America bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







| FCC ID: C3K1995 | PCTEST Hout to be port of @ removed | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dags 1 of 10 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 1 of 42 |

TABLE OF CONTENTS

| 1. | INTRODUCTION | 3 |
|-----|--|----|
| 2. | DUT DESCRIPTION | 4 |
| 3. | ANSI C63.19-2011 PERFORMANCE CATEGORIES | 6 |
| 4. | METHOD OF MEASUREMENT | 8 |
| 5. | OTT VOIP TEST SYSTEM AND DUT CONFIGURATION | 17 |
| 6. | T-COIL TEST SUMMARY | 18 |
| 7. | MEASUREMENT UNCERTAINTY | 22 |
| 8. | EQUIPMENT LIST | 23 |
| 9. | TEST DATA | 24 |
| 10. | CALIBRATION CERTIFICATES | 29 |
| 11. | CONCLUSION | 36 |
| 12. | REFERENCES | 37 |
| 13. | TEST SETUP PHOTOGRAPHS | 39 |

| FCC ID: C3K1995 | PCTEST Thought to be port of the sensesses | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 2 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 2 of 42 |

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 3 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 3 01 42 |

© 2021 PCTEST Portable Handset REV 3.5.N

2. **DUT DESCRIPTION**



FCC ID: C3K1995

Applicant: Microsoft Corporation

> One Microsoft Way Redmond, WA 98052

United States

Model: 1995

Serial Number: 18766, 51385 HW Version: EV3 Debug

SW Version: 16.40.137 (Touch Version)

Antenna: Internal Antenna DUT Type: Portable Handset

Device Serial Numbers

Several samples with identical hardware were used to support HAC testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 6.

II. Device Configuration Testing

This device supports held to ear scenarios in both flip and flat postures. This device was evaluated in both postures.

III. Accessory Testing

This device was evaluated with the WPT Sleeve. Since this accessory has no additional transmitters, only the overall worst-case standalone configurations from the Original Certification Test Report and previous Class II Permissive Change Report were evaluated.

| FCC ID: C3K1995 | PCTEST House to be port of @ received | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 4 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 4 01 42 |

Table 2-1 C3K1995 HAC Air Interfaces

| CON 1993 FIAC All IIILETIACES | | | | | | |
|---|--|----------------|---|---|--|---|
| Air-Interface | Band (MHz) | Type Transport | HAC Tested | Simultaneous But Not Tested | Name of Voice Service | Audio Codec Evaluated |
| | 850 | VO | Yes ³ | Yes: WIFI or BT | CMRS Voice ¹ | EFR |
| GSM | 1900 | | | | | Canala Duna ODUS |
| | GPRS | VD | Yes ³ | Yes: WIFI or BT | Google Duo ² , MS Teams ² | Google Duo: OPUS MS Teams: Satin, Silk |
| | 850 | VD | No ³ | Yes: WIFI or BT | CMRS Voice ¹ | NB AMR, WB AMR |
| UMTS | 1900 | | | | | |
| | HSPA | VD | No ³ | Yes: WIFI or BT | Google Duo ² , MS Teams ² | Google Duo: OPUS MS Teams: Satin, Silk |
| | 680 (B71) | | No ³ | | | |
| | 700 (B12) | | | | | |
| | 780 (B13) | | | | | |
| | 790 (B14) | | | | | |
| | 850 (B5) | | | | | |
| | 850 (B26) | | | Yes: NR, WIFI or BT | | VolTE: NB AMR, WB AMR, EVS Google Duo: OPUS MS Teams: Satin, Silk |
| LTE (FDD) | 1700 (B4) | VD | No ³ | | VoLTE ¹ , Google Duo ² , MS Teams ² | |
| 1700 (B47) 1700 (B66) 1900 (B2) 1900 (B25) | | | | | IVIS TEATIS: SALITI, SIIK | |
| | | | | | | |
| | | | | | | |
| | 2300 (B30) | | | | | |
| | 2500 (B30) 2500 (B7) | | | | | |
| | 2600 (B38) | | | | | |
| LTE (TDD) | 2600 (B41) | VD | No ³ | Yes: NR, WIFI or BT | VoLTE ¹ , Google Duo ² , MS Teams ² | VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS |
| 212 (100) | 3600 (B48) | ,,, | "" | 163.111, 1111.01.21 | volte, doogle buo, wa reams | MS Teams: Satin, Silk |
| | 680 (n71) | | No ³ | | | · |
| | 850 (n5) | | INU | | | |
| NR (FDD) | 1700 (n66) | VD | | Voc. LTE WIEL or DT | Google Duo ² , MS Teams ² | Google Duo: OPUS |
| NK (FDD) | | VU | No ³ | Yes: LTE, WIFI or BT | Google Duo , MS Teams | MS Teams: Satin, Silk |
| | 1900 (n2) | | | | | |
| | 1900 (n25) | | 3 | | | |
| | 2600 (n41) | | No ³ | | | |
| NR (TDD) | 3700 (n77) | VD | No ³ | Yes: LTE, WIFI or BT | Google Duo ² , MS Teams ² | Google Duo: OPUS MS Teams: Satin, Silk |
| | 28000 (n261) | | No ³ | | | IVIS TEATIS. Satill, Silk |
| | 39000 (n260) | | | | | |
| | 2450 | | | | | |
| | 5200 (U-NII 1) | | 2 | | 1 2 2 | VoWIFI: NB AMR, WB AMR, EVS |
| WIFI | 5300 (U-NII 2A) | VD | No ³ | Yes: GSM, UMTS, LTE, or NR | VoLTE ¹ , Google Duo ² , MS Teams ² | Google Duo: OPUS MS Teams: Satin, Silk |
| 5500 (U-NII 20 | | | | | | ivis reallis, satili, slik |
| | 5800 (U-NII 3) | | | | | |
| BT | 2450 | DT | No | Yes: GSM, UMTS, LTE, or NR | N/A | N/A |
| Type Transport VO = Voice Only | | | Notes: | evel in accordance with 7.4.2.1 of ANSI C63.19-20 | 111 and July 2012 C63 VolTE Interpret | ation |
| | | | Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE Interpretation. Reference level is -20dBm0 in accordance with FCC KDB 285076 D02 | | | |
| _ | or IP Voice over Dat | | 3. This report | only pertains to the evaluation of GSM voice mo | des and GPRS data modes with the W | |
| | to the Original certification report (Report S/N: 1M2105060048-19.C3K) and Previous Class II Permissive Change Test Report (Report Sylvent Syl | | | | | |
| | S/N: 1M2109100105-01.C3K) for full test data. | | | | | |

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: |
|-----------------|--------|--------------------------|-----------|--------------|

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.


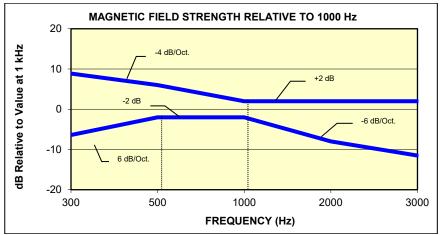


Figure 3-1
Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

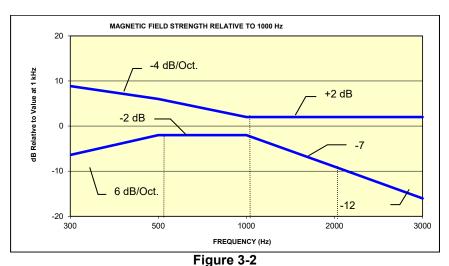

Magnetic Field frequency response for wireless devices with an axial field that exceeds
-15 dB(A/m) at 1 kHz

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 6 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 6 01 42 |

© 2021 PCTEST REV 3.5.M

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

| Category | Telephone RF Parameters | | |
|---|--|--|--|
| | Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB] | | |
| T1 | 0 to 10 dB | | |
| T2 | 10 to 20 dB | | |
| Т3 | 20 to 30 dB | | |
| T4 | > 30 dB | | |
| Table 3-1 Magnetic Coupling Parameters | | | |

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 7 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 7 of 42 |

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

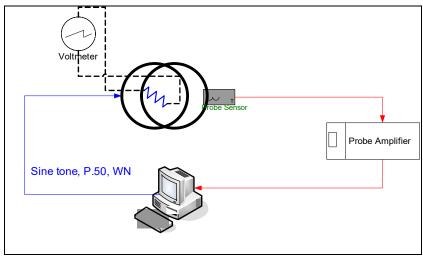


Figure 4-1
Validation Setup with Helmholtz Coil

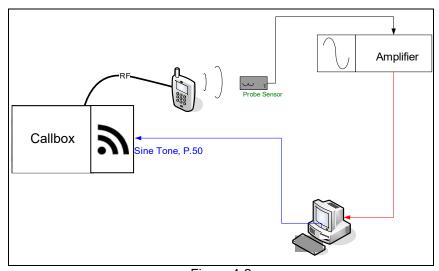


Figure 4-2 **T-Coil Test Setup**

| FCC ID: C3K1995 | PCTEST* | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 8 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 6 01 42 |

II. **Scanning Mechanism**

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm 6.1 cm/sec Maximum speed Line Voltage: 115 VAC Line Frequency: 60 Hz

Material Composite: Delrin (Acetal) Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

36" x 25" x 38" Dimensions: 36" x 49" x 55" Operating Area:

Reflections: < -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. **ITU-T P.50 Artificial Voice**


ITU-T Manufacturer:

Active Frequency 100 Hz - 8 kHz Range:

Stimulus Type: Male and Female, no spaces

Single Sample 20.96 seconds Duration:

100% Activity Level:



Spectral Characteristic of full P.50




Figure 4-5 Temporal Characteristic of full P.50

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 9 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 9 01 42 |

© 2021 PCTEST **REV 3.5.M**



ABM2 Measurement Block Diagram:



Figure 4-6 Magnetic Measurement Processing Steps

IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - "A-weighting" and Half-Band Integration was applied to the measurements.
 - Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.08m; R=10.2Ω and using V=18mV:

$$H_c = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 20).

| FCC ID: C3K1995 | PCTEST* | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 10 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 10 01 42 |

c. Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the P.50 signal as shown below:




Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

> Table 4-1 **ABM2 Frequency Response Validation**

| | HBI, A - | HBI, A - | |
|--------|--------------|--------------|---------|
| f (Hz) | Measured | Theoretical | dB Var. |
| | (dB re 1kHz) | (dB re 1kHz) | |
| 100 | -16.180 | -16.170 | -0.010 |
| 125 | -13.257 | -13.250 | -0.007 |
| 160 | -10.347 | -10.340 | -0.007 |
| 200 | -8.017 | -8.010 | -0.007 |
| 250 | -5.925 | -5.920 | -0.005 |
| 315 | -4.045 | -4.040 | -0.005 |
| 400 | -2.405 | -2.400 | -0.005 |
| 500 | -1.212 | -1.210 | -0.002 |
| 630 | -0.349 | -0.350 | 0.001 |
| 800 | 0.071 | 0.070 | 0.001 |
| 1000 | 0.000 | 0.000 | 0.000 |
| 1250 | -0.503 | -0.500 | -0.003 |
| 1600 | -1.513 | -1.510 | -0.003 |
| 2000 | -2.778 | -2.780 | 0.002 |
| 2500 | -4.316 | -4.320 | 0.004 |
| 3150 | -6.166 | -6.170 | 0.004 |
| 4000 | -8.322 | -8.330 | 0.008 |
| 5000 | -10.573 | -10.590 | 0.017 |
| 6300 | -13.178 | -13.200 | 0.022 |
| 8000 | -16.241 | -16.270 | 0.029 |
| 10000 | -19.495 | -19.520 | 0.025 |

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 11 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | rage 11 01 42 |




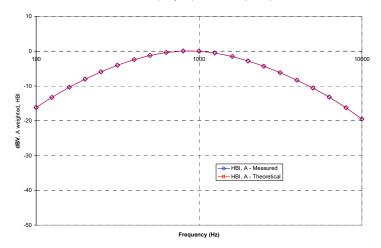


Figure 4-8
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2
ABM2 Power Sum Validation

| WN Input (dBV) | Power Sum (dBV) | Multimeter-Full (dBV) | Dev (dB) |
|-------------------|--------------------|--------------------------|----------|
| -60 | -60.36 | -60.2 | 0.16 |
| -50 | -50.19 | -50.13 | 0.06 |
| -40 | -40.14 | -40.03 | 0.11 |
| -30 | -30.13 | -30.01 | 0.12 |
| -20 | -20.12 | -20 | 0.12 |
| -10 | -10.14 | -10 | 0.14 |

| FCC ID: C3K1995 | PCTEST Proved to be part of @ reserved | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dags 10 of 10 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 12 of 42 |

© 2021 PCTEST REV 3.5.M 8/18/2020





Figure 4-10 **ABM2 Power Sum Validation**

- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

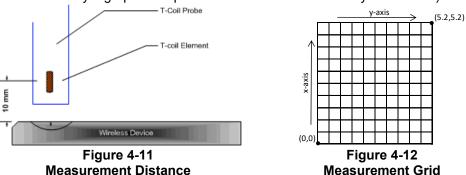

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-14 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

| Standard | Technology | Input Level (dBm0) |
|--------------------|---------------------|-----------------------|
| TIA/EIA/IS-2000 | CDMA | -18 |
| J-STD-007 | GSM (217) | -16 |
| T1/T1P1/3GPP | UMTS (WCDMA) | -16 |
| iDEN TM | TDMA (22 and 11 Hz) | -18 |

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 13 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 13 01 42 |

- ii. See Section 5 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
 - The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

| FCC ID: C3K1995 | PCTEST Hout to be part of & recenses | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|--------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 14 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 14 01 42 |

V. Test Setup




Figure 4-13
Audio Magnetic Field Test Setup

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessibility of RF ports with battery installed.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Please refer to the Original Certification for full evaluation on 2G/3G mode.

Table 4-3
Center Channels and Frequencies

| Test frequencies & associated channels | | | | |
|--|--|--|--|--|
| Channel Frequency (MHz) | | | | |
| Cellular 850 | | | | |
| 190 (GSM) 836.60 | | | | |

| FCC ID: C3K1995 | PCTEST: | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 15 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 15 01 42 |

IX. **Test Flow**

The flow diagram below was followed (From C63.19):

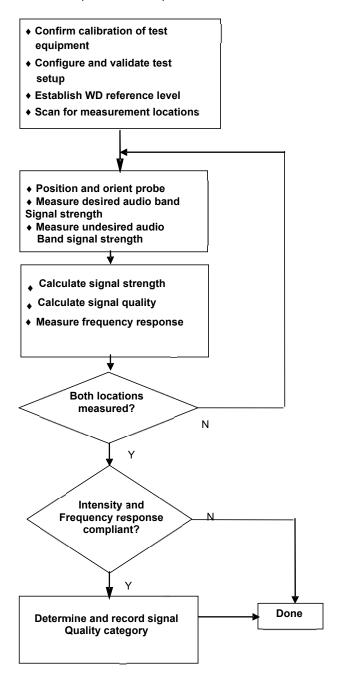


Figure 4-14 C63.19 T-Coil Signal Test Process

| FCC ID: C3K1995 | PCTEST Hours to be part at & resource | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 16 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 10 01 42 |

© 2021 PCTEST **REV 3.5.M**

5. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

MS Teams is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Teams uses the Satin audio codec which supports a bitrate range of 6kb/s to 13kb/s and the Silk audio codec which supports a bitrate range of 6kb/s to 36kb/s. All air interfaces capable of a data connection were evaluated with MS Teams.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation². The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and MS Teams.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed with the Satin and Silk codecs across all bitrates to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The Satin 10kbps setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See Class II Permissive change test report (Report S/N: 1M2109100105-01.C3K) for full evaluation on OTT VoIP T-Coil Testing.

| 2 | | | | |
|--|-------------------|---------------------|--------------------------|--------------------------|
| ² FCC Office of Engineering and | Tochnology KDR | "285076 DO2 T Call | Tacting for CMDS ID vi | 12 " Cantambar 12 2017 |
| FCC Office of Englished and | I CUIIIUIUUV KDD. | . 2000/0 DUZ 1-6011 | TESHING IOL CIVITS IF VI | J. SEDIEITIDEL 13. ZU 17 |

| FCC Office of Engineer | ing and recimology is | DB, 2000/0 D02 1-Coll resulty for Civing if vo | o, oepterriber ro, z | 2017 |
|------------------------|-----------------------|--|----------------------|---------------------------------|
| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
| Filename: | Test Dates: | DUT Type: | | Page 17 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | 1 aye 17 01 42 |

T-COIL TEST SUMMARY

Table 6-1 **Consolidated Tabled Results**

| | | | 00110011 | uutou 1 | abica ite | - Curto | | | |
|--------------------------------------|--------------------------|-------|----------|--------------------|-----------|--------------------|-------------|-------------|--------|
| | Freq. Response Margin | | _ | netic / Verdict | | SNNR dict | Margin from | C63.19-2011 | |
| 000.46 | C63.19 Section | | 8.3.2 | | 8.3.1 | | 3.4 | (dB) | Rating |
| C63.19 | 9 Section | Axial | Radial | Axial | Radial | Axial | Radial | | |
| GSM (South - Flip) | Cellular | PASS | NA | PASS | PASS | PASS | PASS | -5.85 | Т3 |
| GSM (South - Flat) | Cellular | PASS | NA | PASS | PASS | PASS | PASS | -5.45 | Т3 |
| EDGE (OTT VoIP) (South - Flip) | Cellular | PASS | NA | PASS | PASS | PASS | PASS | -1.01 | Т3 |

Raw Handset Data

Table 6-2 **Raw Data Results for GSM (Flip Posture)**

| Mode | Orientation | Channel | Device SN | Accessory | ABM1 [dB(A/m)] | ABM2 [dB(A/m)] | Ambient Noise [dB(A/m)] | Frequency Response Margin (dB) | S+N/N (dB) | FCC Limit (dB) | Margin from FCC Limit (dB) | C63.19-2011 | Test Coordinates |
|--------|-------------|---------|-----------|------------|-------------------|-------------------|----------------------------|--------------------------------------|---------------|-------------------|----------------------------------|-------------|---------------------|
| GSM850 | Axial | 251 | 18766 | WPT Sleeve | -7.73 | -33.58 | -60.72 | 0.76 | 25.85 | 20.00 | -5.85 | T3 | 0.8, 2.8 |

Table 6-3 **Raw Data Results for GSM (Flat Posture)**

| Mode | Orientation | Channel | Device SN | Accessory | ABM1 [dB(A/m)] | ABM2 [dB(A/m)] | Ambient Noise [dB(A/m)] | Frequency Response Margin (dB) | S+N/N (dB) | FCC Limit (dB) | Margin from FCC Limit (dB) | C63.19-2011 | Test Coordinates |
|--------|-------------|---------|-----------|------------|-------------------|-------------------|----------------------------|--------------------------------------|---------------|-------------------|----------------------------------|-------------|---------------------|
| GSM850 | Axial | 190 | 18766 | WPT Sleeve | 3.52 | -22.19 | -60.72 | 0.90 | 25.71 | 20.00 | -5.71 | Т3 | 1.2, 3.8 |
| GSWOOU | Radial | 128 | 18766 | WPT Sleeve | -3.08 | -28.53 | -61.13 | N/A | 25.45 | 20.00 | -5.45 | T3 | 2.0, 4.4 |

Table 6-4 Raw Data Results for GPRS (OTT VoIP) (Flip Posture)

| Mode | Orientation | Channel | Device SN | Accessory | ABM1 [dB(A/m)] | ABM2 [dB(A/m)] | Ambient Noise [dB(A/m)] | Frequency Response Margin (dB) | S+N/N (dB) | FCC Limit (dB) | Margin from FCC Limit (dB) | C63.19-2011 | Test Coordinates |
|---------|-------------|---------|-----------|------------|-------------------|-------------------|----------------------------|--------------------------------------|---------------|-------------------|----------------------------------|-------------|---------------------|
| GPRS850 | Radial | 190 | 51385 | WPT Sleeve | -0.03 | -21.04 | -61.13 | N/A | 21.01 | 20.00 | -1.01 | Т3 | 1.6, 3.0 |

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 18 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 10 01 42 |

II. Test Notes

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Call Settings→Accessibility→Hearing aids) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled while testing 2G modes.
- 6. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. GSM

Power Configuration: GSM850: PCL=5;
 Vocoder Configuration: EFR (GSM);


C. OTT VoIP

1. Vocoder Configuration: Satin, 10kbps


2. GPRS Configuration

a. Coding Scheme: CS-4b. Number of TX slots: 2

III. 1 kHz Vocoder Application Check



This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

| FCC ID: C3K1995 | PCTEST: | - HAC (T-COIL) TEST REPORT | | Approved by: Quality Manager |
|------------------------|-------------|----------------------------|--|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 19 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 19 01 42 |


IV. T-Coil Validation Test Results

Table 6-5
Helmholtz Coil Validation Table of Results

| | on vandation rable | | |
|---------------------------------|--------------------|---------|---------|
| ltem | Target | Result | Verdict |
| Axial | | | |
| Magnetic Intensity, -10 dBA/m | -10 ± 0.5 dB | -10.227 | PASS |
| Environmental Noise | < -58 dBA/m | -60.72 | PASS |
| Frequency Response, from limits | > 0 dB | 0.70 | PASS |
| Radial | | | |
| Magnetic Intensity, -10 dBA/m | -10 ± 0.5 dB | -10.132 | PASS |
| Environmental Noise | < -58 dBA/m | -61.13 | PASS |
| Frequency Response, from limits | > 0 dB | 0.70 | PASS |

| FCC ID: C3K1995 | 95 HAC (T-COIL) TEST REPORT | | Microsoft | Approved by: Quality Manager |
|------------------------|-----------------------------|------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 20 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 20 of 42 |

V. ABM1 Magnetic Field Distribution Scan Overlays

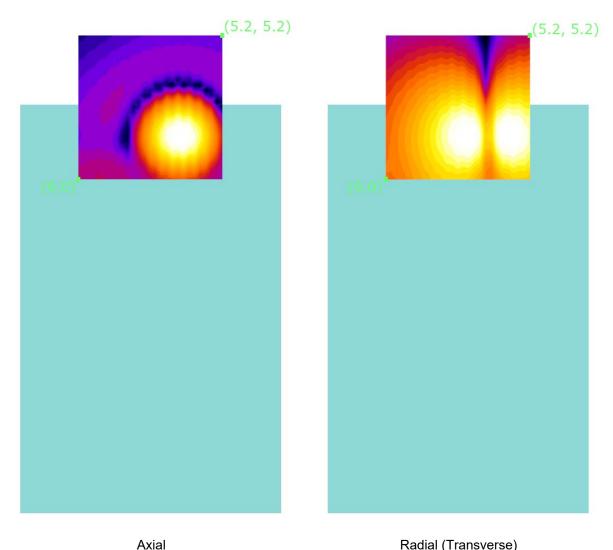

Axial Radial (Transverse)

Figure 6-1

T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated in the raw data tables.
- 2. See Test Setup Photographs for actual WD overlay.

| FCC ID: C3K1995 | PCTEST House to be port of @ received | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---------------------------------------|--------------------------|-----------|------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 21 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 21 01 42 |

© 2021 PCTEST REV 3.5.M

7. MEASUREMENT UNCERTAINTY

Table 7-1 Uncertainty Estimation Table

| Contribution | Data +/- % | Data +/- dB | Data Type | Probability distribution | Divisor | Standard uncertainty | Standard Uncertainty (dB) |
|-------------------------------|---------------|----------------|---------------|--------------------------|---------|----------------------|---------------------------------|
| ABM Noise | 7.0% | 0.29 | Std. Dev. | Normal k=1 | 1.00 | 7.0% | |
| RF Reflections | 4.7% | 0.20 | Specification | Rectangular | 1.73 | 2.7% | |
| Reference Signal Level | 12.2% | 0.50 | Specification | Rectangular | 1.73 | 7.0% | |
| Positioning Accuracy | 10.0% | 0.41 | Uncertainty | Rectangular | 1.73 | 5.8% | |
| Probe Coil Sensitivity | 12.2% | 0.50 | Specification | Rectangular | 1.73 | 7.0% | |
| Probe Linearity | 2.4% | 0.10 | Std. Dev. | Normal k=1 | 1.00 | 2.4% | |
| Cable Loss | 2.8% | 0.12 | Specification | Rectangular | 1.73 | 1.6% | |
| Frequency Analyzer | 5.0% | 0.21 | Specification | Rectangular | 1.73 | 2.9% | |
| System Repeatability | 5.0% | 0.21 | Std. Dev. | Normal k=1 | 1.00 | 5.0% | |
| WD Repeatability | 9.0% | 0.37 | Std. Dev. | Normal k=1 | 1.00 | 9.0% | |
| Positioner Accuracy | 1.0% | 0.04 | Specification | Rectangular | 1.73 | 0.6% | |
| | | | • | | | | |
| Combined standard uncertainty | , uc (k=1) | | | | | 17.7% | 0.71 |
| Expanded uncertainty (k=2), | | 35.3% | 1.31 | | | | |

Notes:

- 1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

| FCC ID: C3K1995 | PCTEST Hout to be port of & recover | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 22 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 22 01 42 |

8. EQUIPMENT LIST

Table 8-1 Equipment List

| =qaipinont =iot | | | | | | | | |
|-----------------|---------------------|--|-----------|--------------|-----------|---------------|--|--|
| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number | | |
| RME | Fireface UC | Acoustic Analyzer External Audio Interface | | Biennial | 3/29/2023 | 23857555 | | |
| Listen | SoundConnect | Microphone Power Supply | | Biennial | 3/29/2023 | PS3099 | | |
| Rohde & Schwarz | CMW500 | Radio Communication tester | | Annual | 7/19/2022 | 128635 | | |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 3/22/2021 | Annual | 3/22/2022 | 162125 | | |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 2/10/2021 | Annual | 2/10/2022 | 161662 | | |
| Seekonk | NC-100 | Torque Wrench (8" lb) | 8/4/2020 | Biennial | 8/4/2022 | 21053 | | |
| TEM | Axial T-Coil Probe | Axial T-Coil Probe | 3/29/2021 | Biennial | 3/29/2023 | TEM-1139 | | |
| TEM | Radial T-Coil Probe | Radial T-Coil Probe | 3/29/2021 | Biennial | 3/29/2023 | TEM-1133 | | |
| TEM | | HAC Positioner | N/A | | N/A | N/A | | |
| TEM | | HAC System Controller with Software | N/A | | N/A | N/A | | |
| TEM | C63.19 | Helmholtz Coil | 3/29/2021 | Biennial | 3/29/2023 | 925 | | |

| FCC ID: C3K1995 | PCTEST Thought to be port of the sensesses | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 22 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 23 of 42 |

9. TEST DATA

| FCC ID: C3K1995 | POTEST Hood to be port of § received | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|--------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 24 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 24 01 42 |

| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | Fage 24 01 42 |
| © 2021 PCTEST | REV 3.5.M 8/18/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: 925

Type: HH Coil Serial: 925


Measurement Standard: ANSI C63.19-2011

Equipment:


• Probe: Axial T-Coil Probe - SN: TEM-1139; Calibrated: 3/29/2021

Helmholtz Coil – SN: 925; Calibrated: 3/29/2021

Noise Spectrum

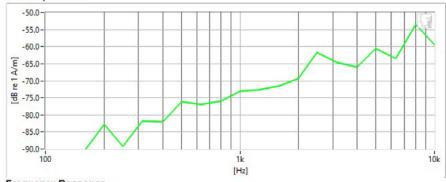

Frequency Response

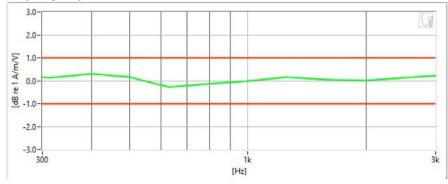

Results

| Verification 1kHz Intensity | -10.227 dE | В | Max/Min | -9.5/-10.5 |
|-----------------------------|------------|-----|------------------|--------------|
| Verification ABM2 | -60.72 dE | В | Maximum | -58.0 |
| Frequency Response Margin | 700m dE | B 📀 | Tolerance curves | Aligned Data |

PCTEST 2021

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 25 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 25 01 42 |



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1133; Calibrated: 3/29/2021
- Helmholtz Coil SN: 925; Calibrated: 3/29/2021

Noise Spectrum

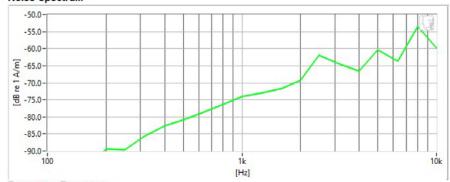

Frequency Response

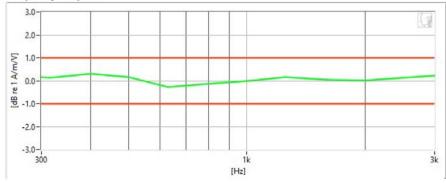

Results

| Verification 1kHz Intensity | -10.132 | dB | • | Max/Min | -9.5/-10.5 |
|-----------------------------|---------|----|---|------------------|--------------|
| Verification ABM2 | -61.13 | dB | • | Maximum | -58.0 |
| Frequency Response Margin | 700m | dB | • | Tolerance curves | Aligned Data |

PCTEST 2021

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 26 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 20 01 42 |



DUT: C3K1995

Type: Portable Handset Serial: 18766

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021

Test Configuration:

- Mode: GSM850
- Channel: 190
- Speech Signal: ITU-T P.50 Artificial Voice
- Accessory: WPT Sleeve

Aligned Response - P.50

Device Posture: Flat

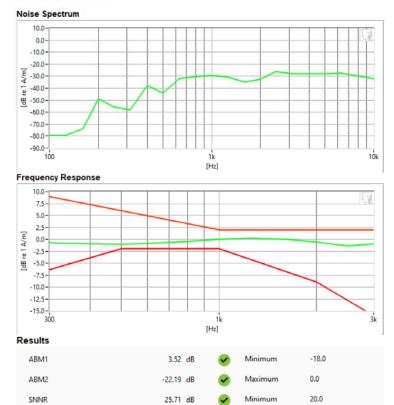

| FCC ID: C3K1995 | PCTEST Thought to be port of the personnel | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 07 of 40 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 27 of 42 |

900m dB

Aligned Data



DUT: C3K1995

Type: Portable Handset Serial: 51385

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

· VolP Application: MS Teams

Mode: GPRS850Channel: 190

Accessory: WPT Sleeve
 Device Posture: Flip

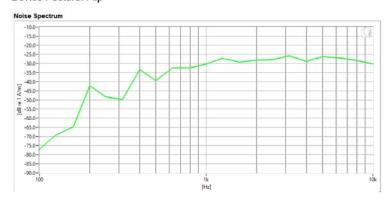

| Results | | | | | |
|---------|--------|----|--------------|---------|-------|
| ABM1 | -30m | dB | \checkmark | Minimum | -18.0 |
| ABM2 | -21.04 | dB | • | Maximum | 0.0 |
| SNNR | 21.01 | dB | ⊘ | Minimum | 20.0 |

| FCC ID: C3K1995 | PCTEST Hours to be part of @ recovery | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|---------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 29 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 28 of 42 |

CALIBRATION CERTIFICATES 10.

| FCC ID: C3K1995 | PCTEST Hood to be part of & second | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 29 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Faye 29 01 42 |

© 2021 PCTEST **REV 3.5.M**

West Caldwell Calibration Laboratories Inc.

Certificate of Calibration

for

AXIAL T COIL PROBE

Manufactured by:

TEM CONSULTING, LP AXIAL T COIL PROBE

Model No: Serial No:

AXIAL I COIL PR

Calibration Recall No: 31813

TEM-1139

Submitted By:

Customer:

ANDREW HARWELL

Company:

PCTEST ENGINEERING LAB

Address: 7185 OAKLAND MILLS ROAD COLUMBIA

MD 21046

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM C

Upon receipt for Calibration, the instrument was found to be:

Within (X

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above and statement of conformance for ALL given specifications and standards fall under the decision rule: A= (L-(U95)*M), where A is acceptance limit, L is manufacturer specifications, U95 is confidence level of 95% at k=2, and M is managed guard-band multiplier. The guard-band multiplier increases false-accept risk in favor of decreasing false-reject risk. Although the false accept risk increases, it is still below the Z540.3 2% risk requirement. The decision rule has been communicated and approved by customer during contract review.

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

29-Mar-21

James Zhu

Certificate No:

31813 - 3

West Caldwell

Quality Manager ISO/IEC 17025:2017

QA Doc. #1051 Rev. 3.0 5/29/20

Certificate Page 1 of 1

Calibration uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

FCC ID: C3K1995

HAC (T-COIL) TEST REPORT

Microsoft

Approved by:
Quality Manager

Filename:
1M2109130107-03-R1.C3K

9/27/2021

Page 30 of 42

© 2021 PCTEST

REV 3.5.N

West Caldwell Calibration uncompromised calibration Laboratories, Inc.

Calibration Lab. Cert. # 1533.01

ISO/IEC 17025: 2017

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab


Model No.: Axial T Coil Probe

Serial No.: TEM-1139

I. D. No.: XXXX

Calibration results: Probe Sensitivity measured with Helmholtz Coil Before & after data same: ... X ... Helmholtz Coil; the number of turns on each coil; 10 No. Laboratory Environment: the radius of each coil, in meters; 0.204 m 20.4 ٥С Ambient Temperature: 0.08 Α the current in the coils, in amperes.; 29.3 % RH Ambient Humidity: Helmholtz Coil Constant; 7.09 A/m/V 99.394 kPa Ambient Pressure: Helmholtz Coil magnetic field; 5.92 A/m 29-Mar-2021 Calibration Date: Calibration Due: Probe Sensitivity at 1000 Hz. 31813 -3 Report Number: -60.26 dBV/A/m was 31813 Control Number: mV/A/m 0.970 Ohms 873 Probe resistance The above listed instrument meets or exceeds the tested manufacturer's specifications. 684.07/O-0000001126-20 This Calibration is traceable through NIST test numbers: The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

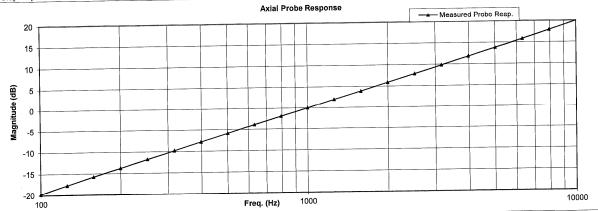

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015/150 17025

Cal. Date: 29-Mar-2021

Measurements performed by:

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 1 of 2

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 21 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 31 of 42 |

HCATEMC_TEM-1139_Mar-29-2021.xls

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1139

| Test | Function | Tolerai | тсе | | Measured values | |
|------|--------------------------|-------------|---------------------------------------|--------|-----------------|---------|
| | | | · · · · · · · · · · · · · · · · · · · | Before | Out | Remarks |
| 1.0 | Probe Sensitivity at | 1000 Hz. | dBV/A/m | -60.26 | | |
| | | | dB | | | |
| 2.0 | Probe Level Linearity | | 6 | 5.94 | | |
| | | Ref. (0 dB) | 0 | 0.00 | | |
| | | | -6 | -6.03 | | |
| | | | -12 | -12.04 | | |
| | | | Hz | | | |
| 3.0 | Probe Frequency Response | | 100 | -19.8 | | |
| | | | 126 | -17.8 | | |
| | | | 158 | -15.7 | | |
| | | | 200 | -13.8 | | |
| | | | 251 | -11.8 | | |
| | | | 316 | -9.8 | | |
| | | | 398 | -7.8 | | |
| | | | 501 | -5.9 | | |
| | | | 631 | -3.9 | | |
| | | | 794 | -2.0 | | |
| | | Ref. (0 dB) | 1000 | 0.0 | | |
| | | | 1259 | 2.0 | | |
| | | | 1585 | 3.9 | | |
| | | | 1995 | 5.9 | | |
| | | | 2512 | 7.9 | | |
| | | | 3162 | 9.8 | | |
| | | | 3981 | 11.8 | | |
| | | | 5012 | 13.8 | | - |
| | | | 6310 | 15.8 | | |
| | | | 7943 | 17.9 | | |
| | | | 10000 | 20.0 | | |
| | | | | | | |

Cal. Date: 29-Mar-2021

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

| FCC ID: C3K1995 | PCTEST Hout to be part of & received | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|--------------------------------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 32 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 32 01 42 |



Certificate of Calibration

for

RADIAL T COIL PROBE

Manufactured by: TEM CONSULTING, LP Model No: RADIAL T COIL PROBE

Serial No: TEM-1133 Calibration Recall No: 31813

Submitted By:

Customer: ANDREW HARWELL

Company: PCTEST ENGINEERING LAB Address: 7185 OAKLAND MILLS ROAD

COLUMBIA MD 21046

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No. RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above and statement of conformance for ALL given specifications and standards fall under the decision rule: A= (L-(U95)*M), where A is acceptance limit, L is manufacturer specifications, U95 is confidence level of 95% at k=2, and M is managed guard-band mulitiplier. The guard-band multiplier increases false-accept risk in favor of decreasing false-reject risk. Although the false accept risk increases, it is still below the Z540.3 2% risk requirement. The decision rule has been communicated and approved by customer during contract review.

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date: 29-Mar-21

James Zhu

Certificate No: 31813 - 2

1575 State Route 96, Victor, NY 14564, U.S.A.

Quality Manager ISO/IEC 17025:2017

QA Doc. #1051 Rev. 3.0 5/29/20

_

Calibration Laboratories, Inc.

West Caldwell

Certificate Page 1 of 1

Calibration Lab. Cert. # 1533.01

FCC ID: C3K1995

HAC (T-COIL) TEST REPORT

Microsoft

Approved by:
Quality Manager

Filename:
1M2109130107-03-R1.C3K

9/27/2021

Page 33 of 42

West Caldwell Calibration uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor NY 14564

ISO/IEC 17025: 2017



REPORT OF CALIBRATION


TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

Model No.: Radial T Coil Probe

Serial No.: TEM-1133 I. D. No.: XXXX

| Probe Sensitivity measured with | Helmholtz | : Coil | | | |
|--|-------------|------------------|----------------------------|-------------|----------|
| Helmholtz Coil; | | | Before & after data same:X | | |
| the number of turns on each coil; | 10 | No. | | | |
| the radius of each coil, in meters; | 0.204 | m | Laboratory Environment: | | |
| the current in the coils, in amperes.; | 0.09 | Α | Ambient Temperature: | 20.4 | °C |
| Helmholtz Coil Constant; | 7.09 | A/m/V | Ambient Humidity: | 29.3 | % RH |
| Helmholtz Coil magnetic field; | 5.97 | A/m | Ambient Pressure: | 99.394 | kPa |
| Helimote Con magnetic transp | | | Calibration Date: | 29-Mar-2021 | |
| Probe Sensitivity at | 1000 | Hz. | Re-calibration Due: | | |
| was | -60.18 | dBV/A/m | Report Number: | | 31813 -2 |
| | 0.980 | mV/A/m | Control Number: | | 31813 |
| Probe resistance | 896 | Ohms | | | |
| above listed instrument meets or exceeds t | he tested n | nanufacturer's s | pecifications. | | |

Graph represents Probes Frequency Response.

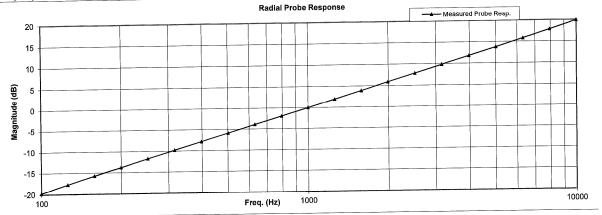

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17025

Cal. Date: 29-Mar-2021

Measurements performed by:

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

James **Z**hu Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 1 of 2

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 34 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 34 01 42 |

HCRTEMC_TEM-1133_Mar-29-2021.xls

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

for Model No.: Radial T Coil Probe

Serial No.: TEM-1133

| est | Function | Tolera | nce | | Measured values | |
|-----|--------------------------|-------------|---------|--------|-----------------|---------|
| | | | | Before | Out | Remarks |
| 0 | Probe Sensitivity at | 1000 Hz. | dBV/A/m | -60.18 | | |
| | Alt . | | dB | | | |
| 0 | Probe Level Linearity | | 6 | 6.04 | | |
| | | Ref. (0 dB) | 0 | 0.00 | | |
| | | | -6 | -6.03 | | |
| | | | -12 | -12.06 | | |
| | | | Hz | | | |
| 0 | Probe Frequency Response | | 100 | -19.8 | | |
| | | | 126 | -17.8 | | |
| | | | 158 | -15.7 | | |
| | | | 200 | -13.8 | | |
| | | | 251 | -11.8 | | |
| | | | 316 | -9.8 | | |
| | | | 398 | -7.8 | | |
| | | | 501 | -5.9 | | |
| | | | 631 | -3.9 | | |
| | | | 794 | -2.0 | | |
| | | Ref. (0 dB) | 1000 | 0.0 | | |
| | | | 1259 | 2.0 | | |
| | | | 1585 | 3.9 | | |
| | | | 1995 | 5.9 | | |
| | | | 2512 | 7.8 | | |
| | | | 3162 | 9.8 | | |
| | | | 3981 | 11.8 | | |
| | | | 5012 | 13.8 | | |
| | | | 6310 | 15.8 | | |
| | | | 7943 | 17.8 | | |
| | | | 10000 | 20.0 | | |
| | | | | 1 | | |

| Instruments used for calibration: HP 34401A HP 34401A HP 33120A B&K 2133 | S/N US360641 2 S/N US361024 2 S/N US360437 2 | Date of Cal. -Jul-2020 -Jul-2020 -Jul-2020 -Jul-2020 | Traceability No. ,610119 ,610119 ,610119 684.07/O-0000001126-20 | Due Date 2-Jul-2021 2-Jul-2021 2-Jul-2021 1-Jul-2021 |
|--|--|--|---|--|
|--|--|--|---|--|

Cal. Date: 29-Mar-2021

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 35 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 33 01 42 |

11. CONCLUSION

The measurements indicate that the referenced wireless communications device, when used with the accessory, complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

| FCC ID: C3K1995 | PCTEST | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|-------------|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 36 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Fage 30 01 42 |

12. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify
 Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- FCC 3G Review Guidance. Laboratory Division OET FCC. May/June 2006
- Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, "IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- 12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

| FCC ID: C3K1995 | PCTEST Proved to be post of @ comment | HAC (T-COIL) TEST REPORT | | Approved by: Quality Manager |
|------------------------|--|--------------------------|--|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 27 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 37 of 42 |

- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements. AIP Press.

| FCC ID: C3K1995 | PCTEST Thoughts be post of ® reserved | HAC (T-COIL) TEST REPORT | Microsoft | Approved by: Quality Manager |
|------------------------|--|--------------------------|-----------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 38 of 42 |
| 1M2109130107-03-R1.C3K | 9/27/2021 | Portable Handset | | Page 30 01 42 |