



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>

PART 27 MEASUREMENT REPORT

Applicant Name:
Microsoft Corporation
One Microsoft way
Redmond, WA, 98052
United States

Date of Testing:
03/30/2022- 06/24/2022
Test Report Issue Date:
07/20/2022
Test Site/Location:
Element, Columbia, MD, USA
Test Report Serial No.:
1M2204040049-08-R1.C3K

FCC ID:	C3K1997
Applicant Name:	Microsoft Corporation

Application Type:	Certification
Model:	1997
EUT Type:	Portable Computing Device
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part:	27
Test Procedure(s):	ANSI C63.26-2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2204040049-08-R1.C3K) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 1 of 110

V3.0 1/6/2022



TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Software and Firmware	6
2.5	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Conducted Output Power Data	12
7.3	Occupied Bandwidth	14
7.4	Spurious and Harmonic Emissions at Antenna Terminal	35
7.5	Band Edge Emissions at Antenna Terminal	55
7.6	Peak-Average Ratio	69
7.7	Radiated Power (EIRP).....	84
7.8	Radiated Spurious Emissions Measurements.....	88
7.9	Frequency Stability / Temperature Variation	108
8.0	CONCLUSION.....	110

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 2 of 110

V3.0 1/6/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

PART 27 MEASUREMENT REPORT

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC3 (3700 - 3980MHz) ANT 2	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.133	21.25	97M0G7D
		QPSK	3750.0 - 3930.0	0.130	21.15	97M7G7D
		16QAM	3750.0 - 3930.0	0.100	19.99	97M9W7D
	90 MHz	$\pi/2$ BPSK	3745.0 - 3935.0	0.134	21.27	87M2G7D
		QPSK	3745.0 - 3935.0	0.131	21.17	88M1G7D
		16QAM	3745.0 - 3935.0	0.099	19.96	88M0W7D
	80 MHz	$\pi/2$ BPSK	3740.0 - 3940.0	0.134	21.29	77M3G7D
		QPSK	3740.0 - 3940.0	0.131	21.16	77M3G7D
		16QAM	3740.0 - 3940.0	0.100	20.01	77M9W7D
	70 MHz	$\pi/2$ BPSK	3735.0 - 3945.0	0.135	21.29	64M5G7D
		QPSK	3735.0 - 3945.0	0.134	21.27	67M8G7D
		16QAM	3735.0 - 3945.0	0.099	19.95	67M8W7D
	60 MHz	$\pi/2$ BPSK	3730.0 - 3950.0	0.136	21.34	58M1G7D
		QPSK	3730.0 - 3950.0	0.132	21.20	58M3G7D
		16QAM	3730.0 - 3950.0	0.098	19.93	58M2W7D
	50 MHz	$\pi/2$ BPSK	3725.0 - 3955.0	0.133	21.23	45M9G7D
		QPSK	3725.0 - 3955.0	0.130	21.13	47M8G7D
		16QAM	3725.0 - 3955.0	0.100	20.00	47M7W7D
	40 MHz	$\pi/2$ BPSK	3720.0 - 3960.0	0.144	21.59	35M7G7D
		QPSK	3720.0 - 3960.0	0.141	21.48	38M0G7D
		16QAM	3720.0 - 3960.0	0.109	20.37	38M1W7D
	30 MHz	$\pi/2$ BPSK	3715.0 - 3965.0	0.146	21.65	27M0G7D
		QPSK	3715.0 - 3965.0	0.138	21.39	28M0G7D
		16QAM	3715.0 - 3965.0	0.109	20.36	28M0W7D
	20 MHz	$\pi/2$ BPSK	3710.0 - 3970.0	0.136	21.32	17M9G7D
		QPSK	3710.0 - 3970.0	0.130	21.15	18M3G7D
		16QAM	3710.0 - 3970.0	0.103	20.14	18M3W7D

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC3 (3700 - 3980MHz) ANT 3	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.151	21.78	96M9G7D
		QPSK	3750.0 - 3930.0	0.135	21.29	97M9G7D
		16QAM	3750.0 - 3930.0	0.109	20.38	97M9W7D

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 3 of 110

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC3 (3700 - 3980MHz) ANT 5	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.029	14.63	96M6G7D
		QPSK	3750.0 - 3930.0	0.022	13.46	97M5G7D
		16QAM	3750.0 - 3930.0	0.019	12.75	97M8W7D

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC3 (3700 - 3980MHz) ANT 8	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.032	15.02	96M7G7D
		QPSK	3750.0 - 3930.0	0.030	14.84	97M8G7D
		16QAM	3750.0 - 3930.0	0.028	14.51	97M8W7D

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 4 of 110

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 5 of 110

V3.0 1/6/2022

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Microsoft Corporation Portable Computing Device FCC ID: C3K1997**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: JP220, 5S220, JS220, JT220

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5, 6GHz), Bluetooth (1x, EDR, LE).

The device has 4 Tx antennas for n77 data (Ant 2, 3, 5 & 8). Antennas 3, 5 & 8 are capable of SRS Tx only and can transmit the SRS signal to check for the channel quality of n77. The antennas cannot simultaneously transmit. Only the single Tx/Rx antenna is used for Data transmission.

This device operates only in the 3700-3980MHz range of NR band n77.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version 1.930.0 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 6 of 110

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 7 of 110

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 8 of 110

V3.0 1/6/2022

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	12/9/2021	Annual	12/9/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx2
-	LTx3	Licensed Transmitter Cable Set	8/18/2021	Annual	8/18/2022	LTx3
-	LTx4	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx4
-	LTx5	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx5
Agilent	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6201300731
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	5/25/2022	Annual	5/25/2023	17620
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	2/14/2022	Annual	2/14/2023	MY54490576
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			102060
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/25/2021	Annual	8/25/2022	103200
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 9 of 110

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 10 of 110

V3.0 1/6/2022

7.0 TEST RESULTS

7.1 Summary

Company Name: Microsoft Corporation
 FCC ID: C3K1997
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power*	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (NR Band n77)	2.1051, 27.53(l)	≤ 13 dBm / MHz	PASS	Sections 7.4, 7.5
	Peak-to-Average Ratio (NR Band n77)	27.50(j)(4)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block.	PASS	Section 7.9
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n77)	27.50(j)(3)	≤ 1 Watt EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n77)	2.1053, 27.53(l)	≤ 13 dBm / MHz	PASS	Section 7.8

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 11 of 110

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

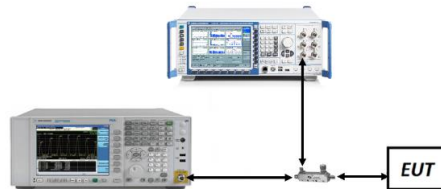


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 12 of 110

V3.0 1/6/2022



NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840	QPSK	270/0	B14	10	Mid	793	QPSK	50/0	22.02	21.95	25.00
				QPSK	270/0					QPSK	1/25	22.13	23.05	25.62
				QPSK	1/136					QPSK	50/0	24.02	22.52	26.34
				QPSK	1/136					QPSK	1/25	24.05	23.87	26.97
				16Q	1/136					16Q	1/25	23.62	22.62	26.16

Table 7-2. EN-DC Conducted Max Powers (NR Band n77-B14)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840	QPSK	270/0	B66	20	Mid	1745	QPSK	100/0	22.96	23.65	26.33
				QPSK	270/0					QPSK	1/50	22.92	24.20	26.62
				QPSK	1/136					QPSK	100/0	24.01	23.55	26.80
				QPSK	1/136					QPSK	1/50	24.05	24.18	27.13
				16Q	1/136					16Q	1/50	23.15	23.20	26.19

Table 7-3. EN-DC Conducted Max Powers (NR Band n77-B66)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840	QPSK	270/0	B30	10	Mid	2310	QPSK	50/0	21.95	22.28	25.13
				QPSK	270/0					QPSK	1/25	22.12	23.35	25.79
				QPSK	1/136					QPSK	50/0	23.98	22.15	26.17
				QPSK	1/136					QPSK	1/25	24.07	23.40	26.76
				16Q	1/136					16Q	1/25	22.65	22.05	25.37

Table 7-4. EN-DC Conducted Max Powers (NR Band n77-B30)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 13 of 110

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

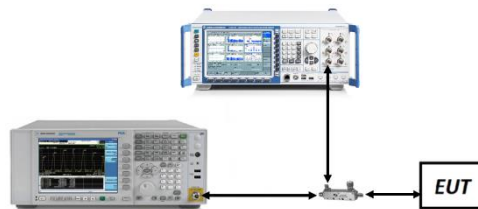



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 14 of 110

NR Band n77 PC3 – ANT2

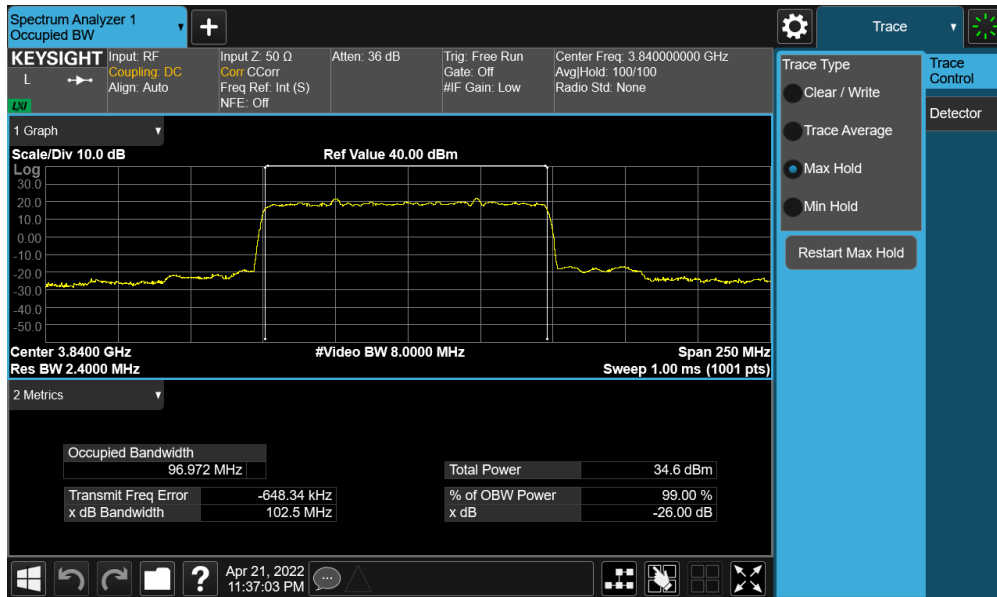


Plot 7-1. Occupied Bandwidth Plot (NR Band n77 - 100MHz $\pi/2$ BPSK - Full RB - ANT2)

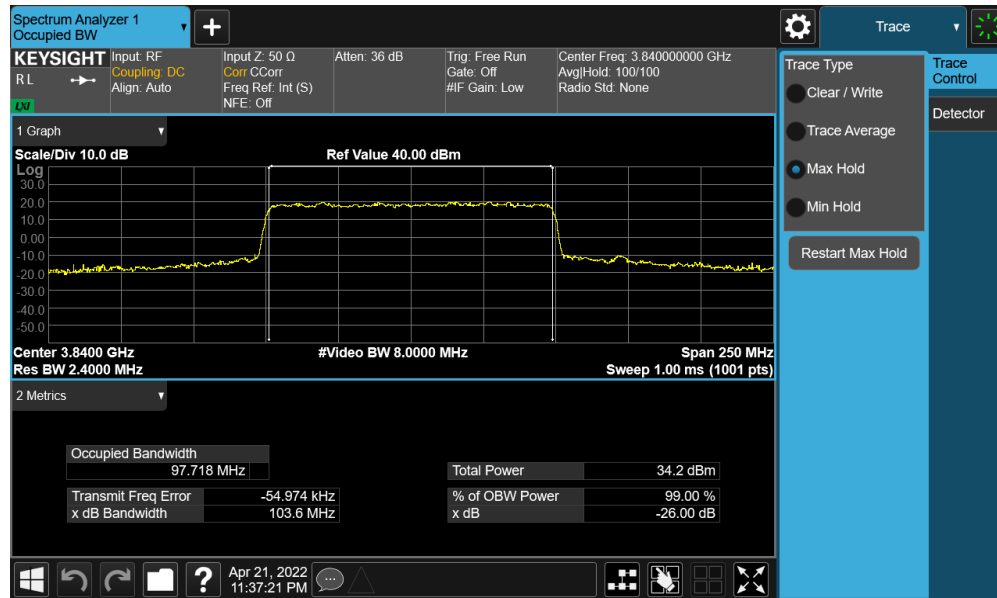


Plot 7-2. Occupied Bandwidth Plot (NR Band n77 - 100MHz QPSK - Full RB - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 15 of 110

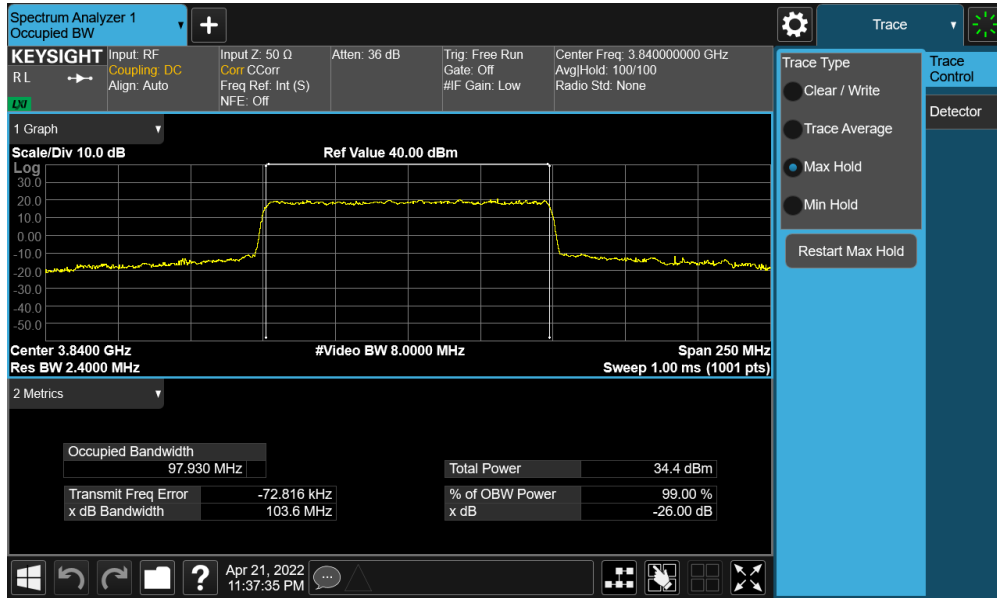


Plot 7-3. Occupied Bandwidth Plot (NR Band n77 - 100MHz 16-QAM - Full RB - ANT2)

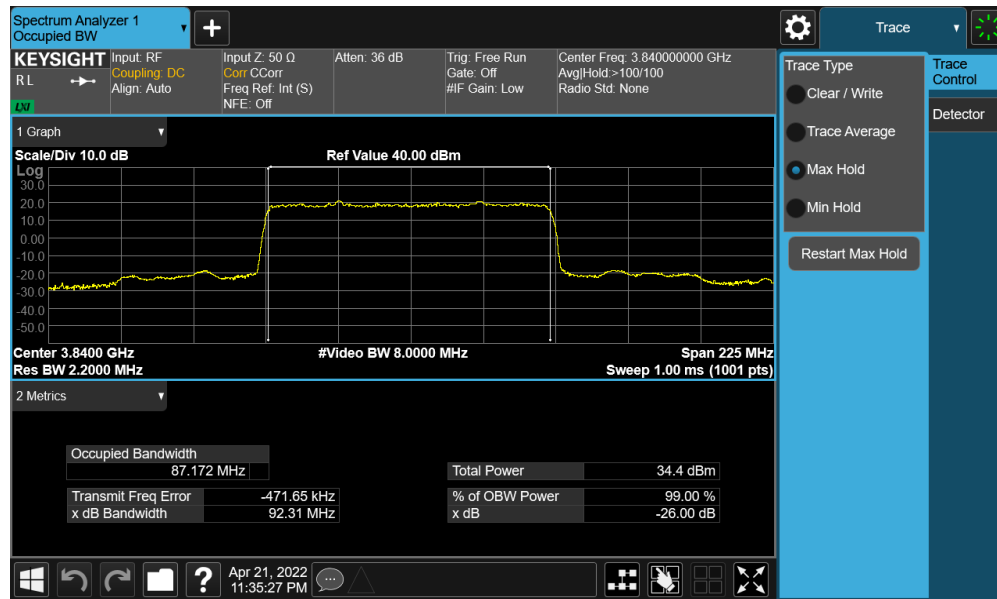


Plot 7-4. Occupied Bandwidth Plot (NR Band n77 - 90MHz $\pi/2$ BPSK - Full RB - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 16 of 110


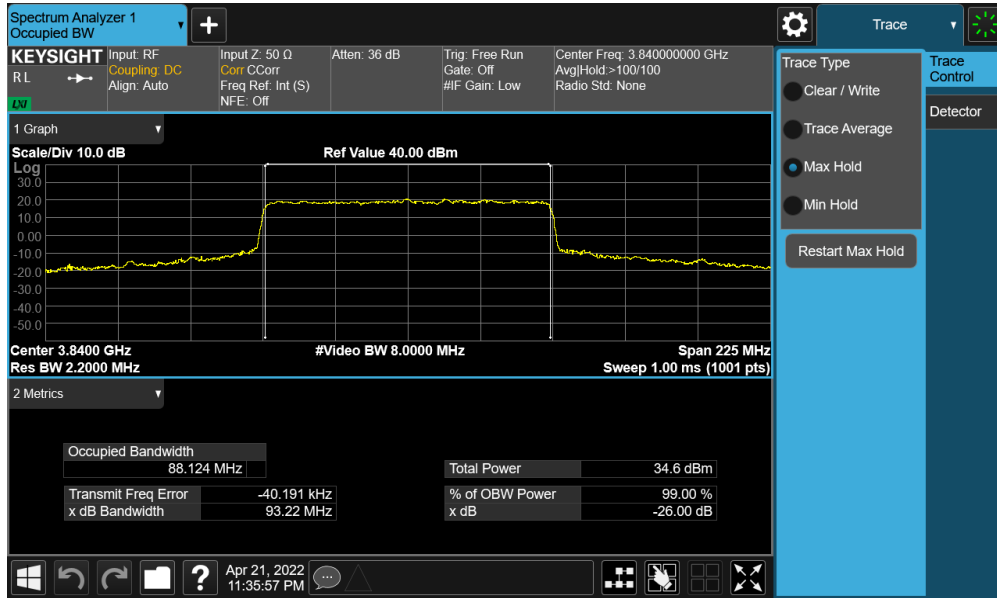


Plot 7-5. Occupied Bandwidth Plot (NR Band n77 - 90MHz QPSK - Full RB - ANT2)

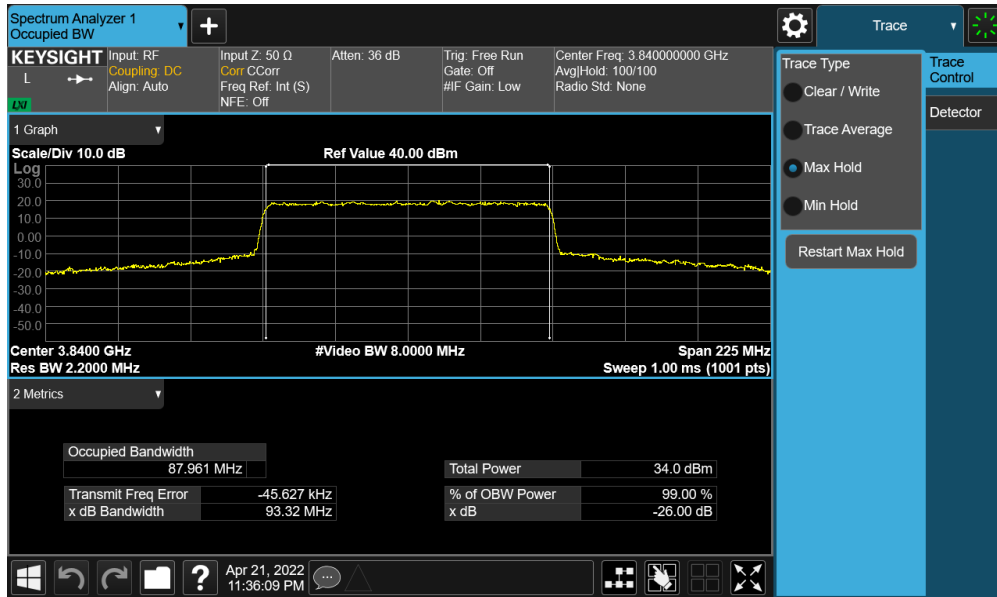


Plot 7-6. Occupied Bandwidth Plot (NR Band n77 - 90MHz 16-QAM - Full RB - ANT2)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 17 of 110

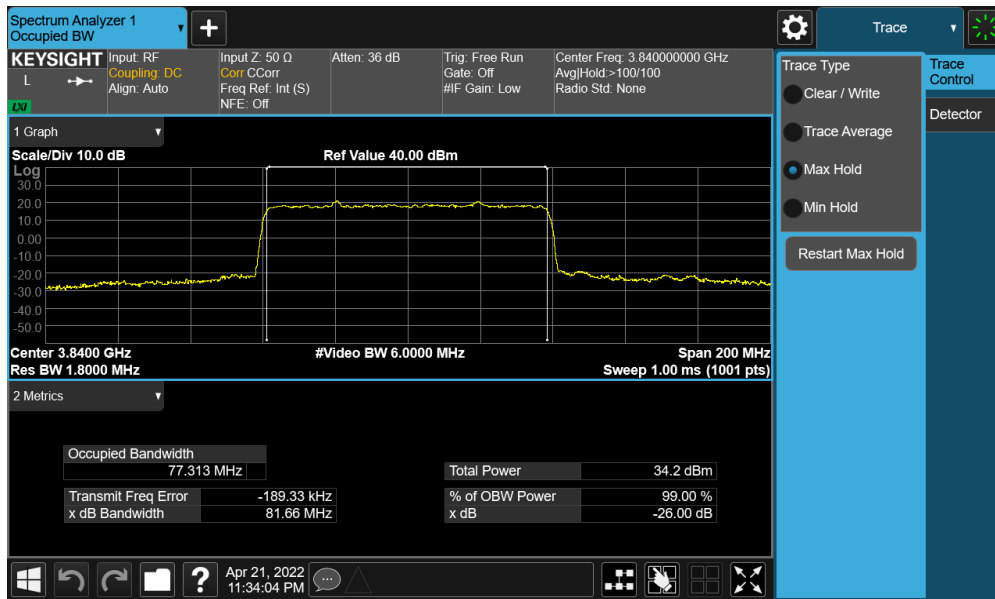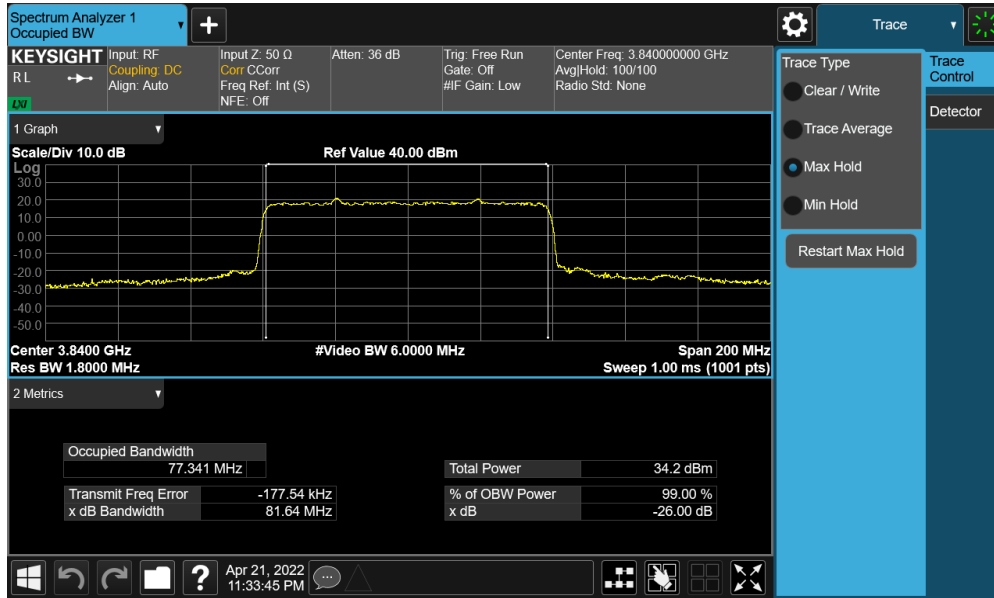

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 18 of 110

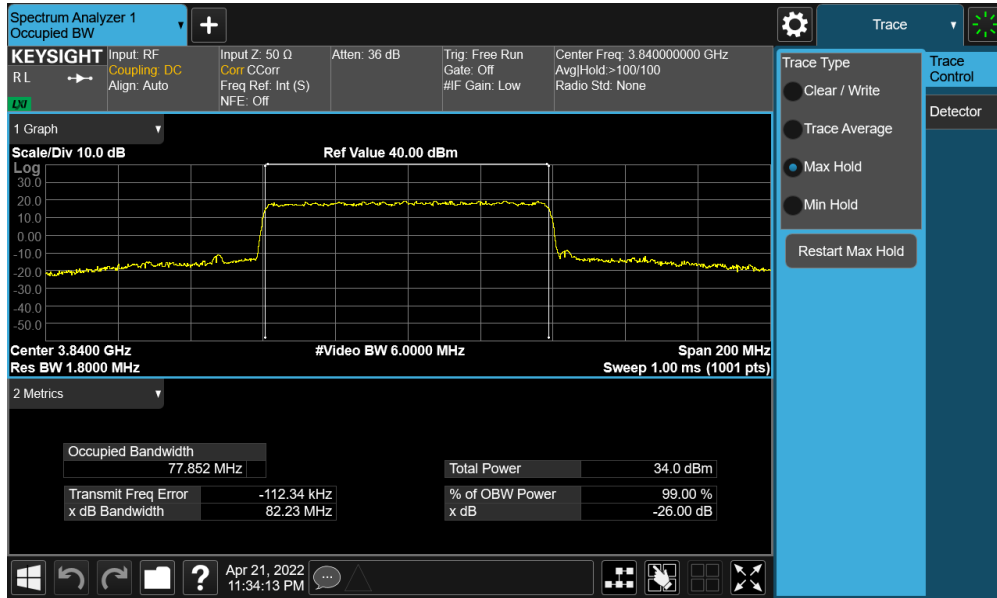


Plot 7-9. Occupied Bandwidth Plot (NR Band n77 - 80MHz 16-QAM - Full RB - ANT2)

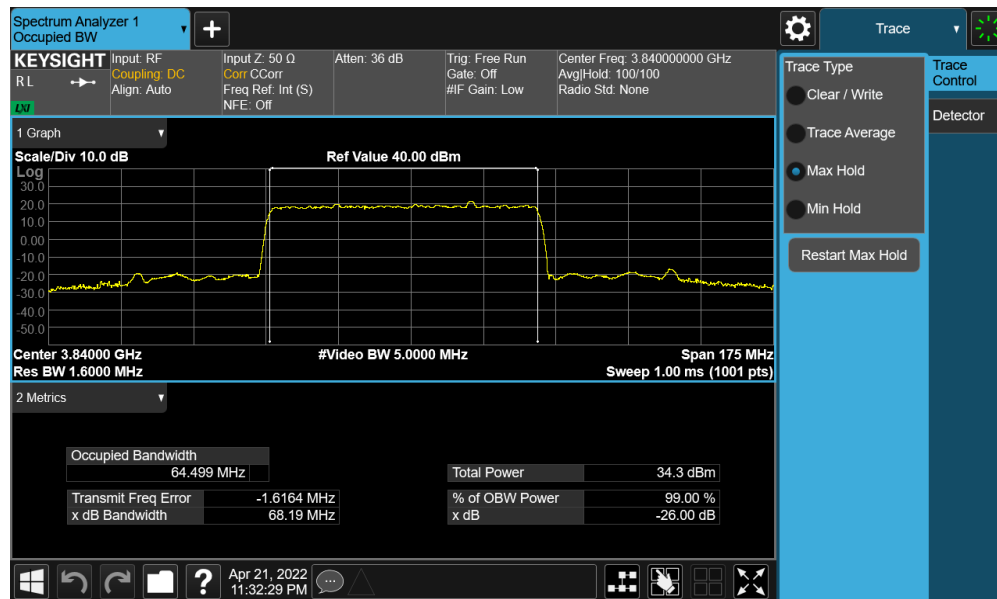


Plot 7-10. Occupied Bandwidth Plot (NR Band n77 - 70MHz $\pi/2$ BPSK - Full RB - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 19 of 110


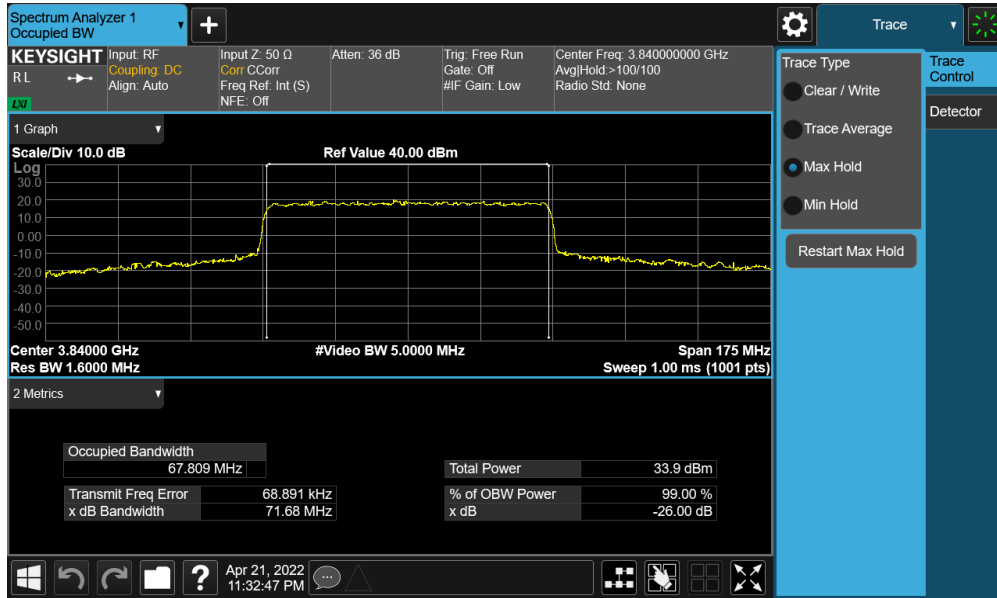


Plot 7-11. Occupied Bandwidth Plot (NR Band n77 - 70MHz QPSK - Full RB - ANT2)

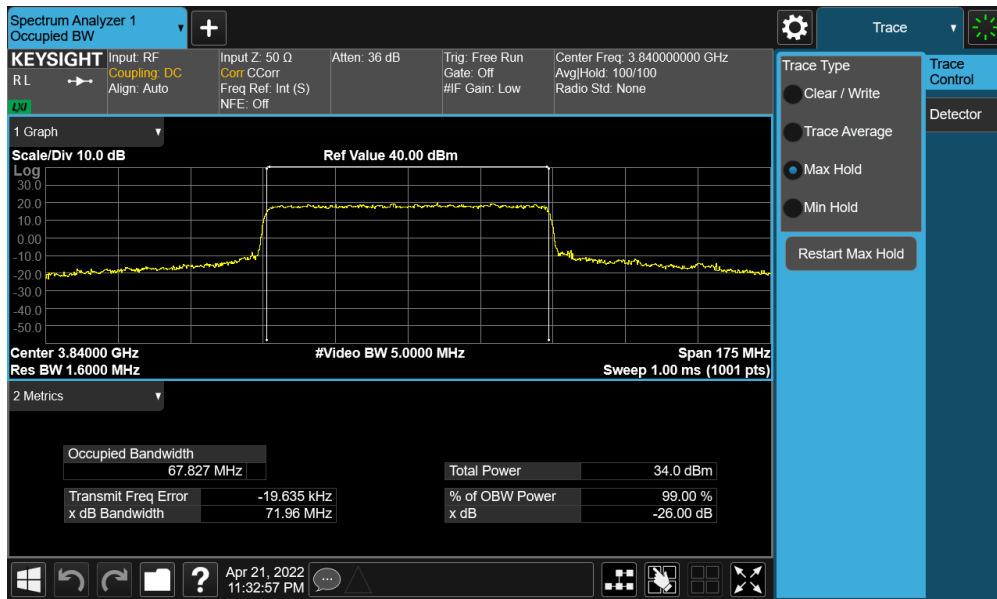


Plot 7-12. Occupied Bandwidth Plot (NR Band n77 - 70MHz 16-QAM - Full RB - ANT2)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 20 of 110

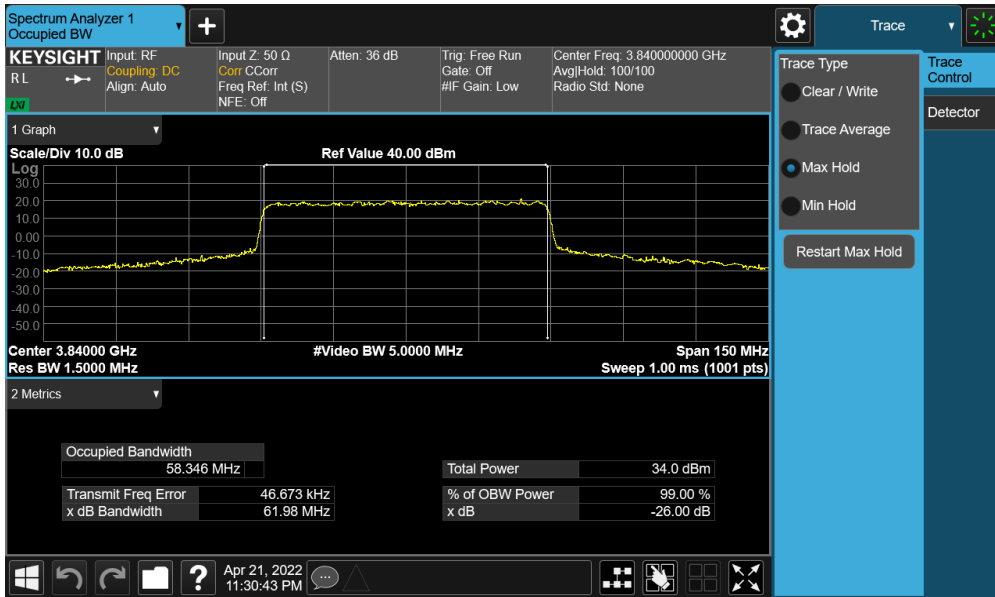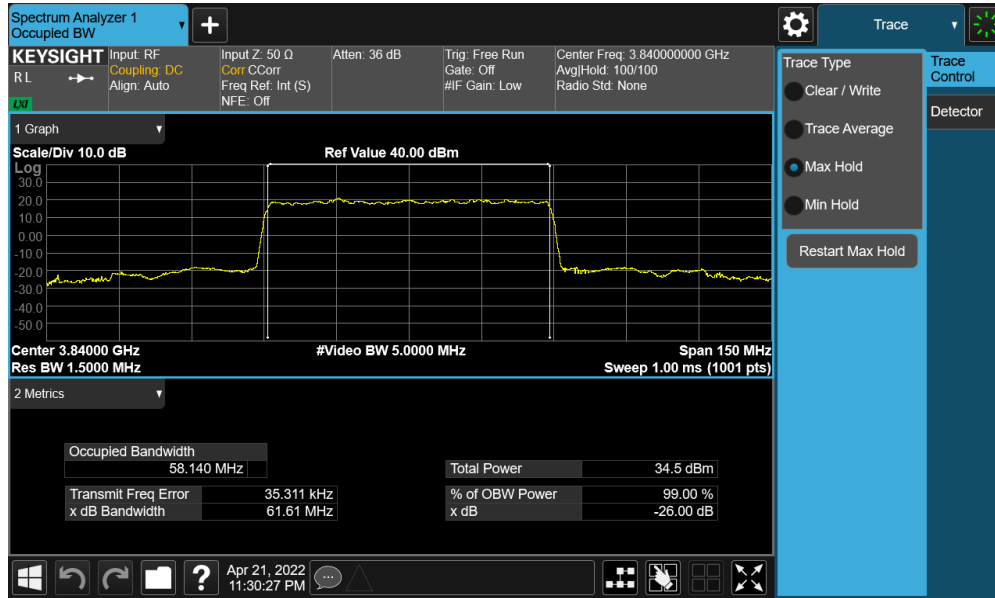

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 21 of 110


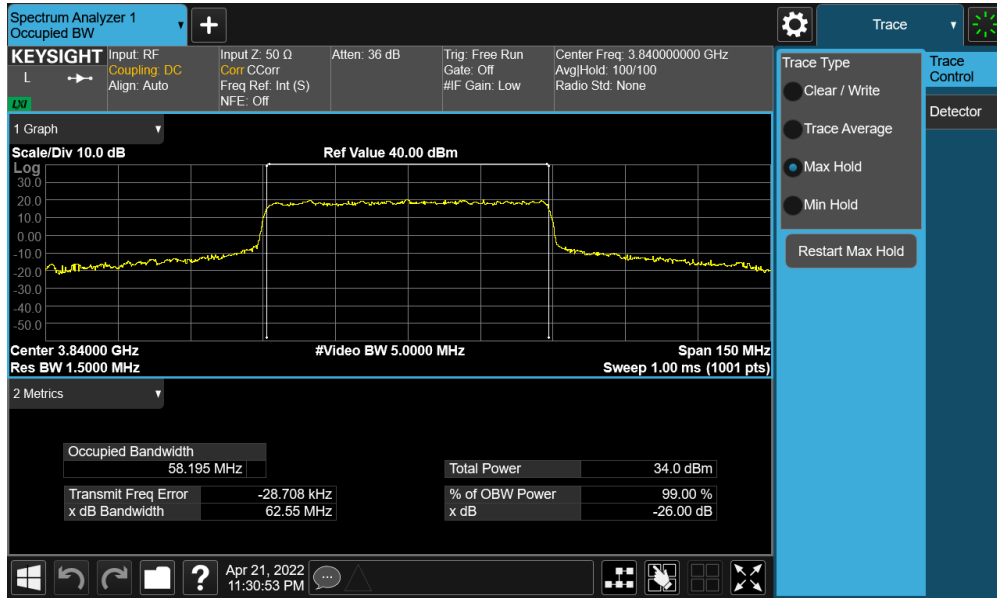


Plot 7-15. Occupied Bandwidth Plot (NR Band n77 - 60MHz 16-QAM - Full RB - ANT2)

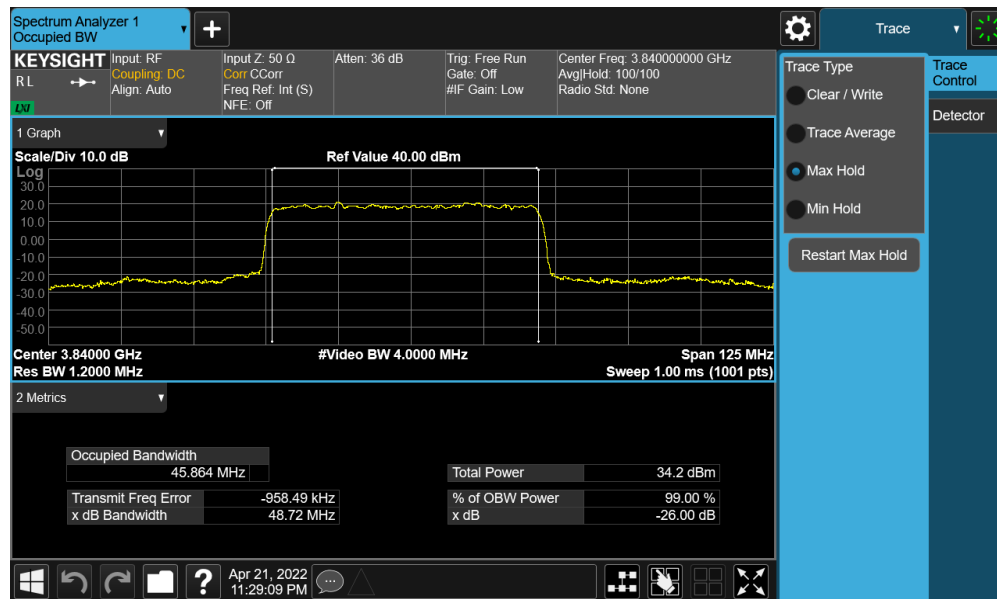


Plot 7-16. Occupied Bandwidth Plot (NR Band n77 - 50MHz $\pi/2$ BPSK - Full RB - ANT2)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 22 of 110

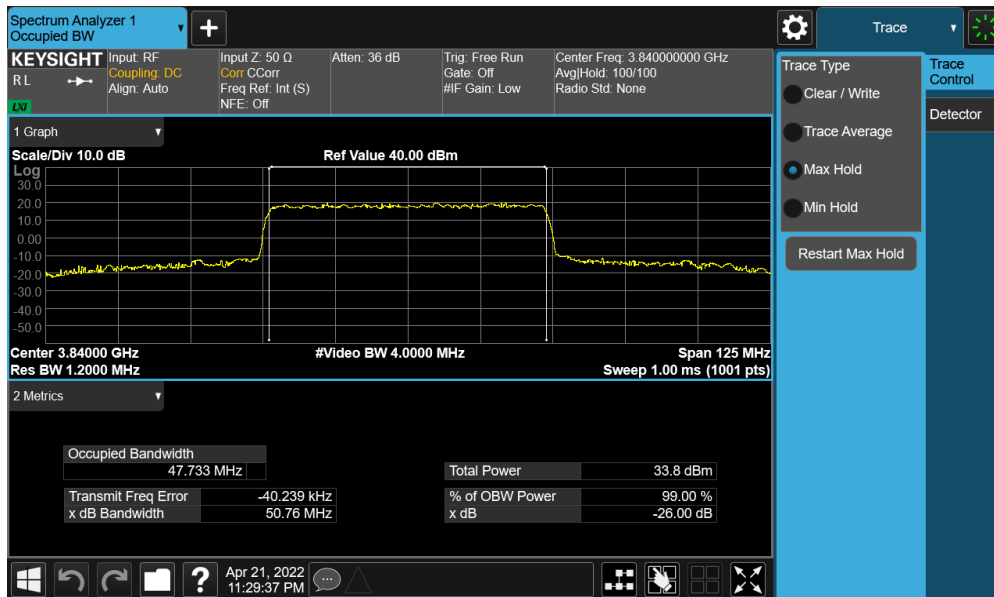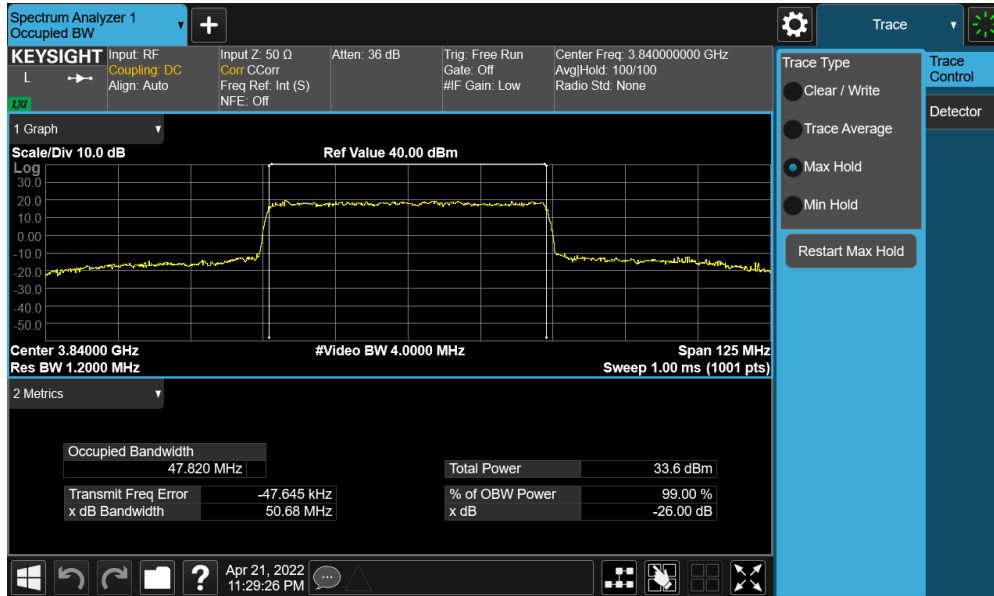

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 23 of 110


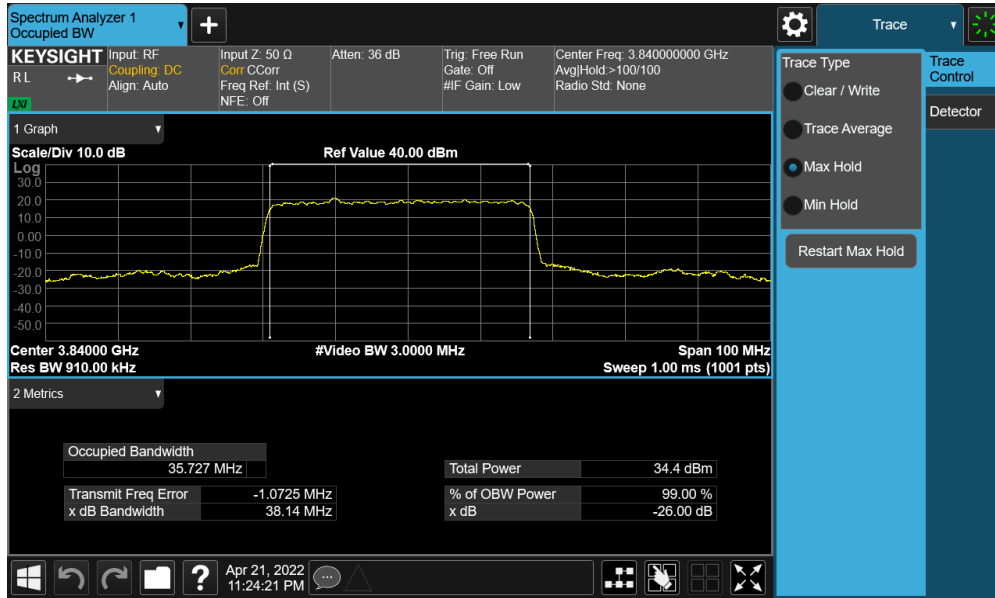


Plot 7-19. Occupied Bandwidth Plot (NR Band n77 - 40MHz $\pi/2$ BPSK - Full RB - ANT2)


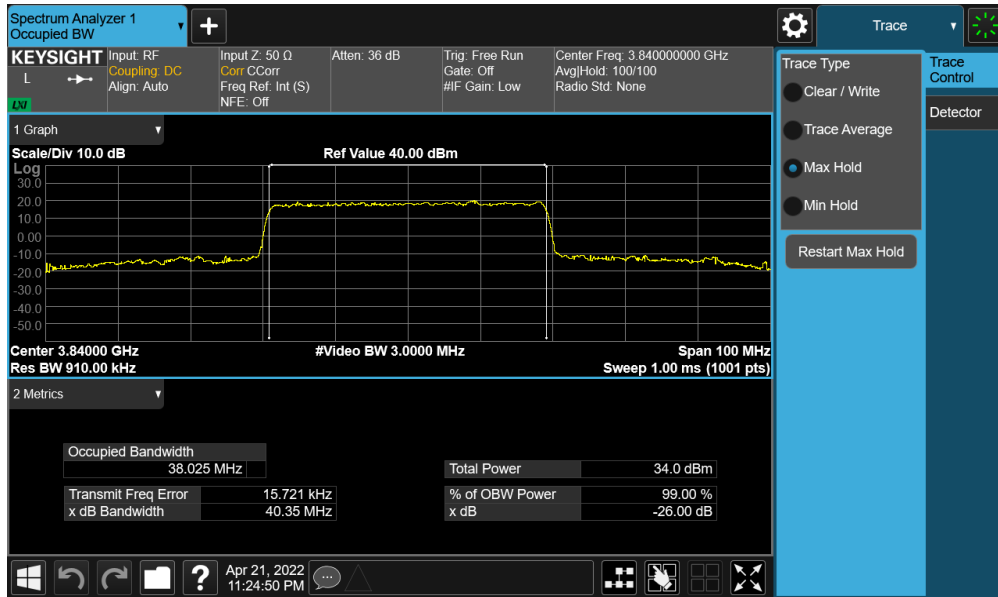


Plot 7-20. Occupied Bandwidth Plot (NR Band n77 - 40MHz QPSK - Full RB - ANT2)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 24 of 110

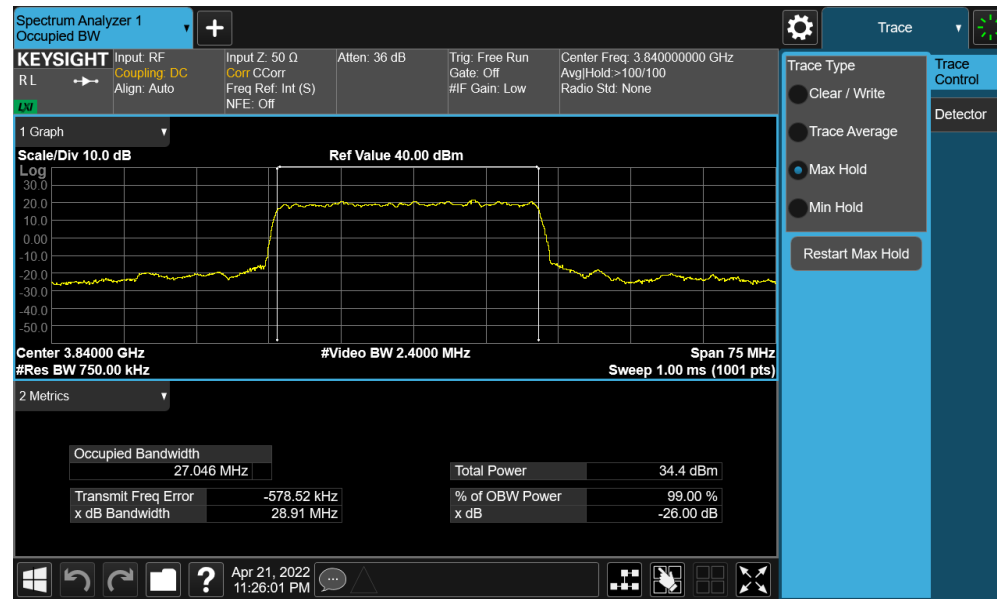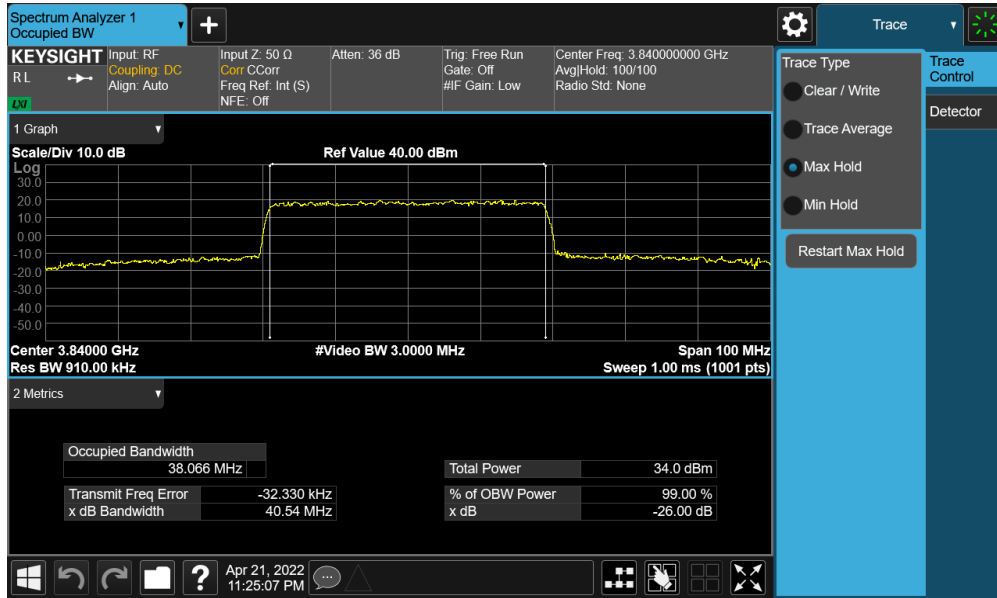

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 25 of 110

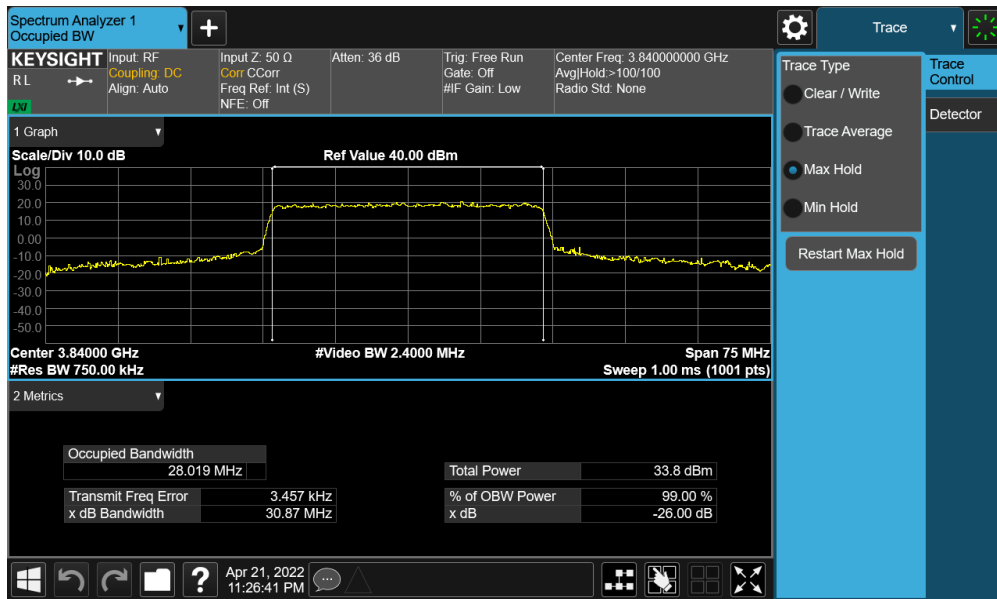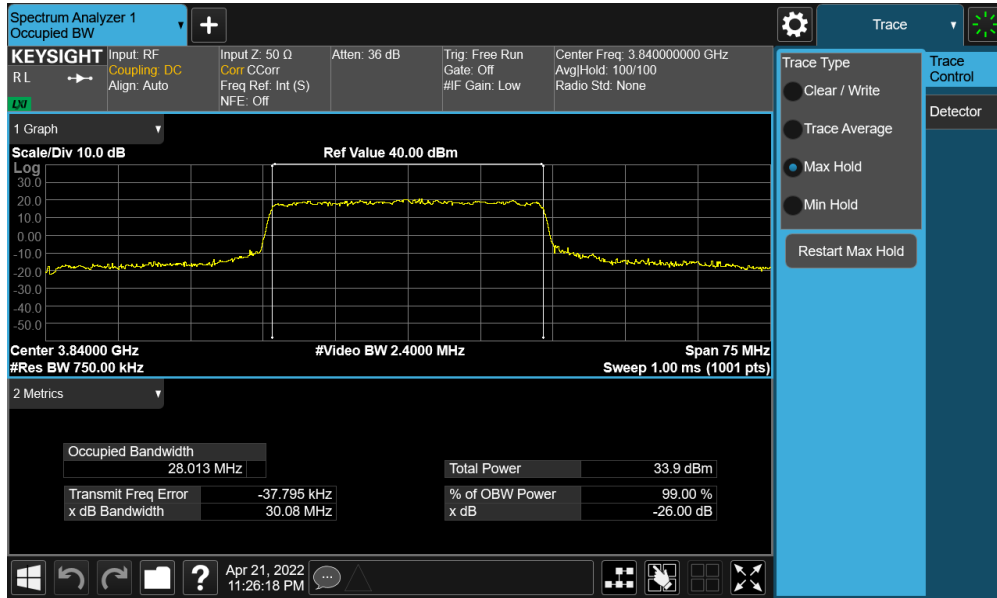

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 26 of 110

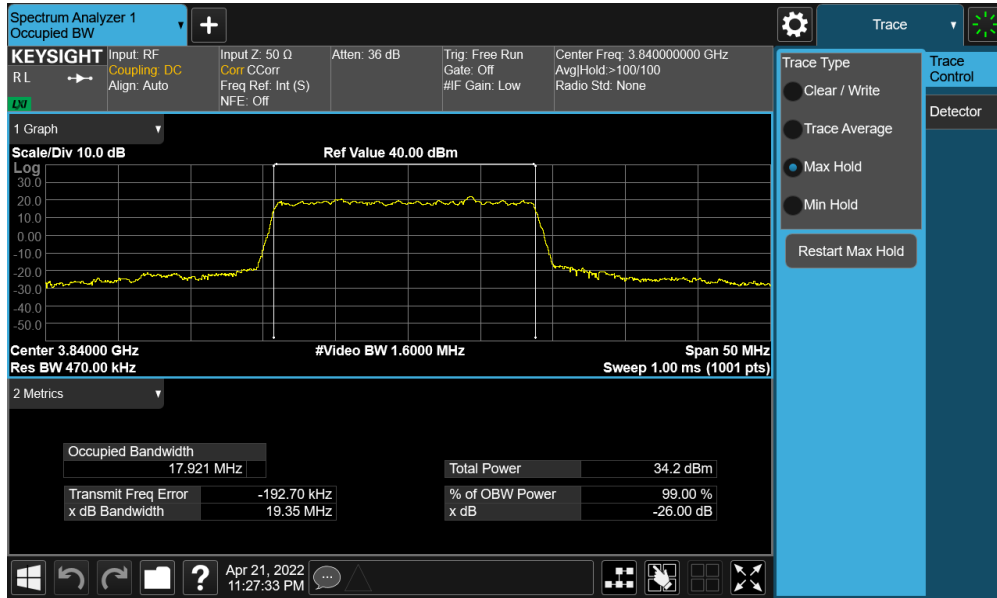


Plot 7-25. Occupied Bandwidth Plot (NR Band n77 - 20MHz $\pi/2$ BPSK - Full RB - ANT2)



Plot 7-26. Occupied Bandwidth Plot (NR Band n77 - 20MHz QPSK - Full RB - ANT2)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 27 of 110

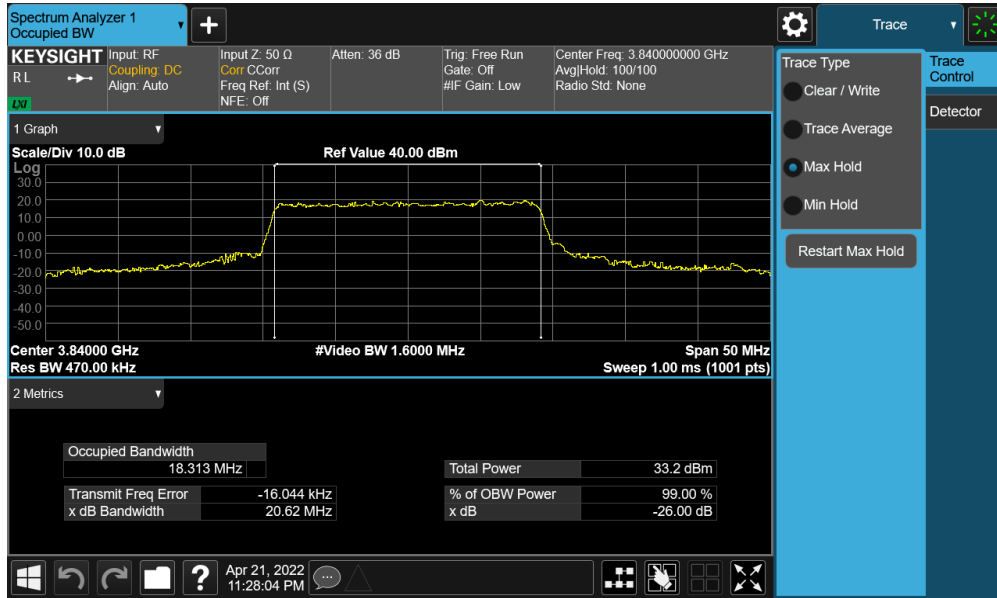


Plot 7-27. Occupied Bandwidth Plot (NR Band n77 - 20MHz 16-QAM - Full RB - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 28 of 110

NR Band n77 PC3 – ANT3

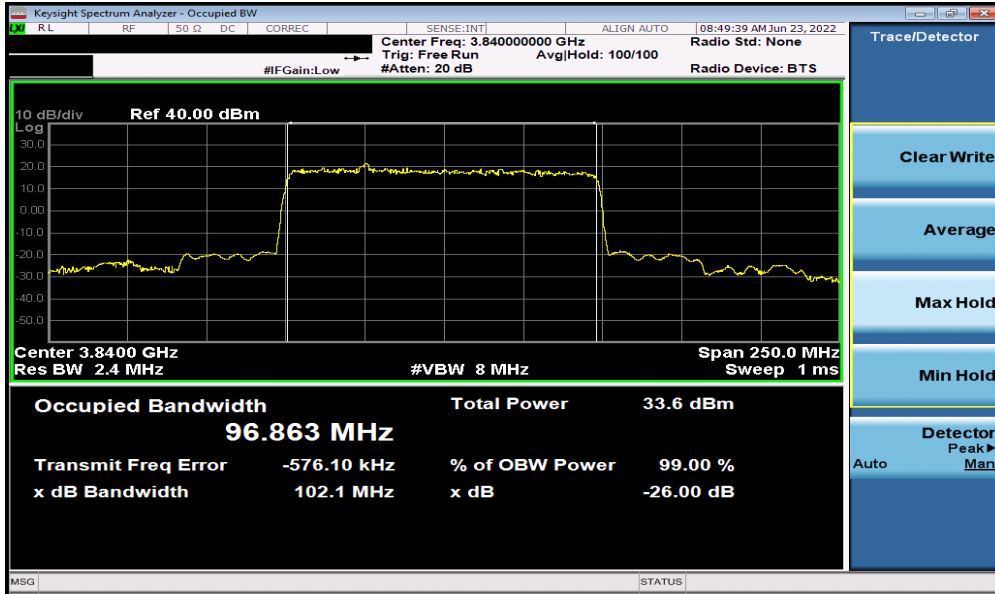


Plot 7-28. Occupied Bandwidth Plot (NR Band n77 - 100MHz $\pi/2$ BPSK - Full RB – ANT3)

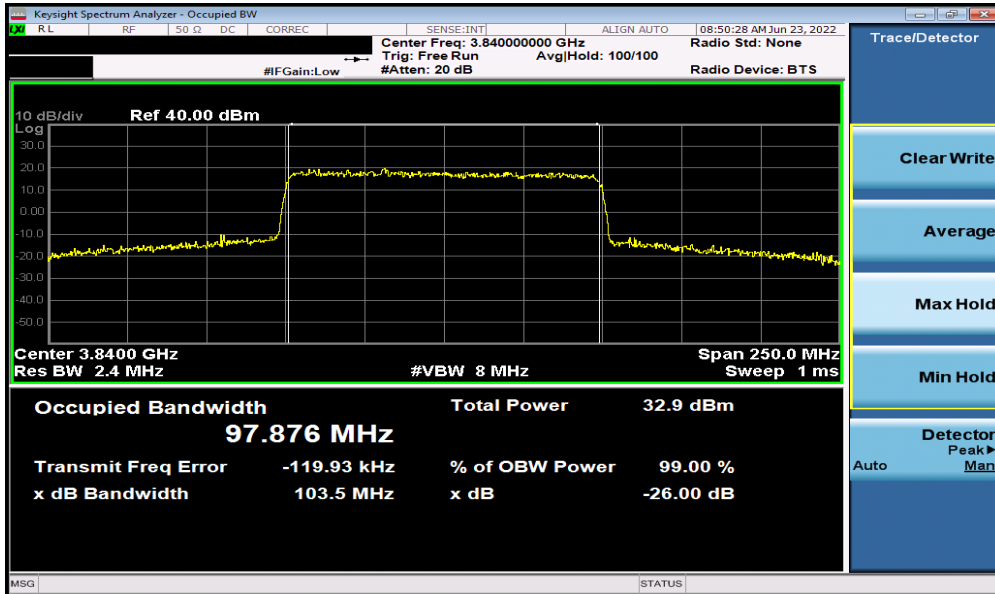

Plot 7-29. Occupied Bandwidth Plot (NR Band n77 - 100MHz QPSK - Full RB – ANT3)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 29 of 110

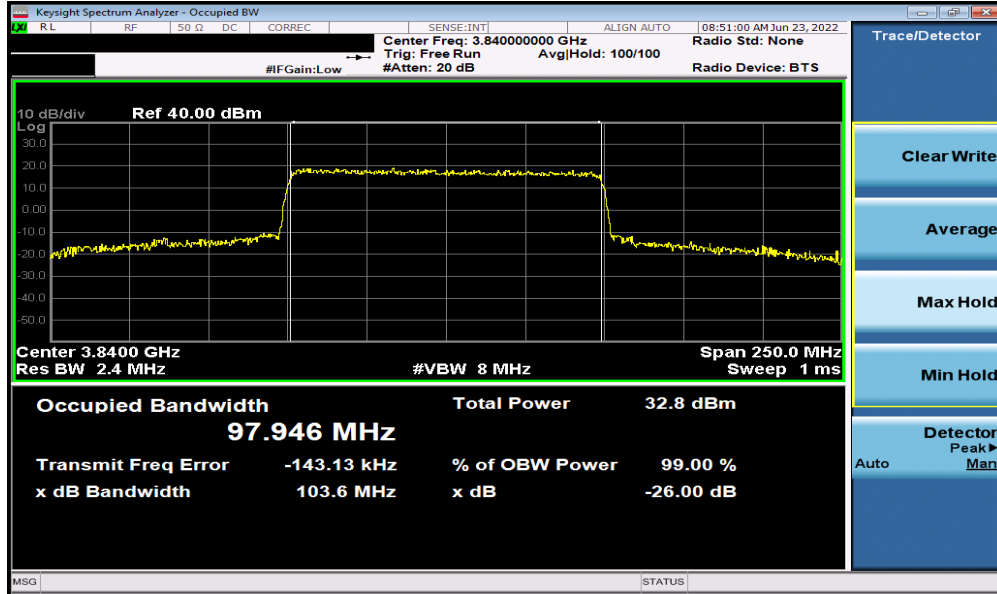


Plot 7-30. Occupied Bandwidth Plot (NR Band n77 - 100MHz 16-QAM - Full RB – ANT3)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 30 of 110

NR Band n77 PC3 – ANT5

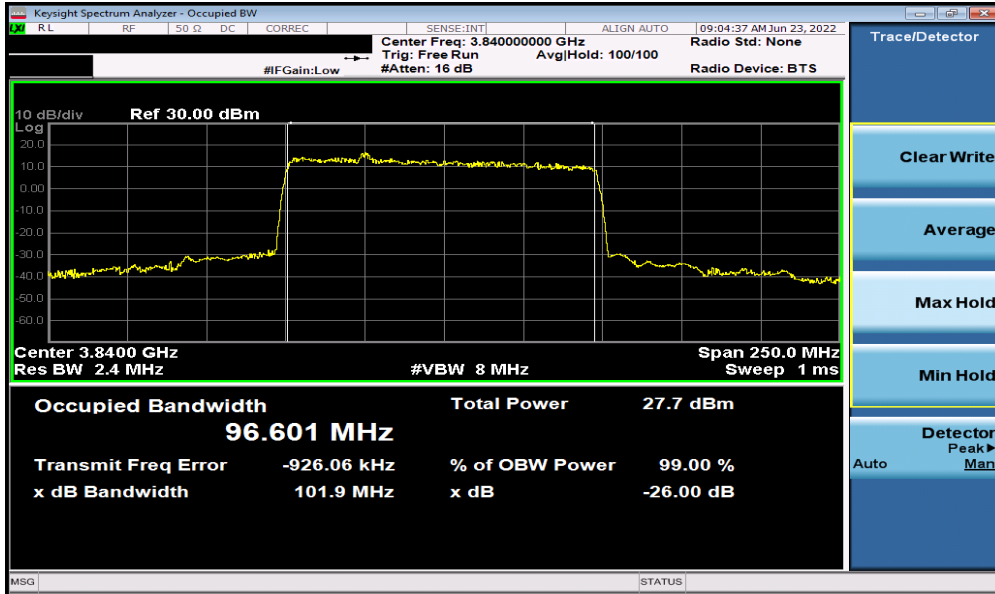


Plot 7-31. Occupied Bandwidth Plot (NR Band n77 - 100MHz $\pi/2$ BPSK - Full RB – ANT5)

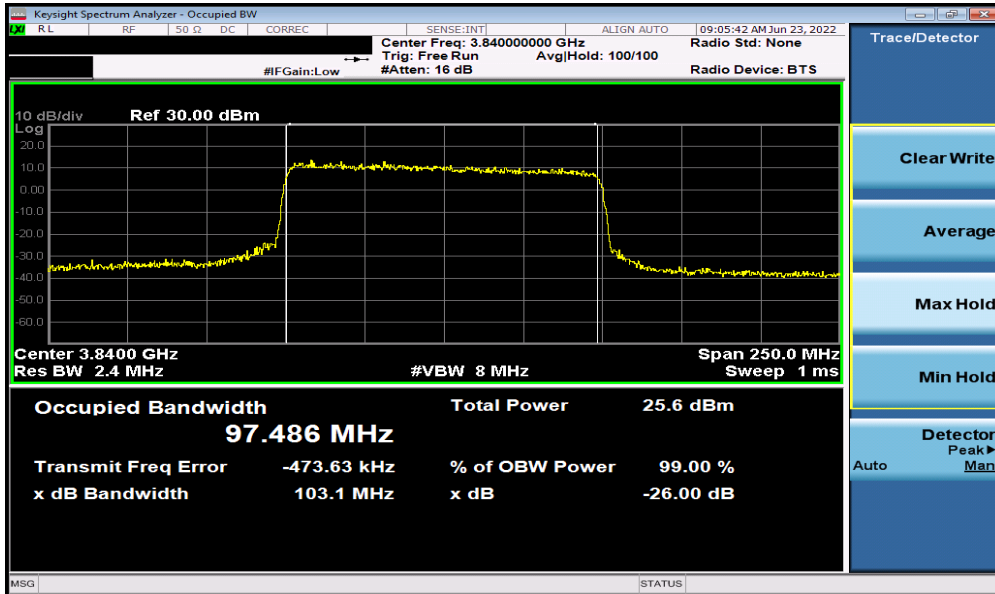

Plot 7-32. Occupied Bandwidth Plot (NR Band n77 - 100MHz QPSK - Full RB – ANT5)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 31 of 110

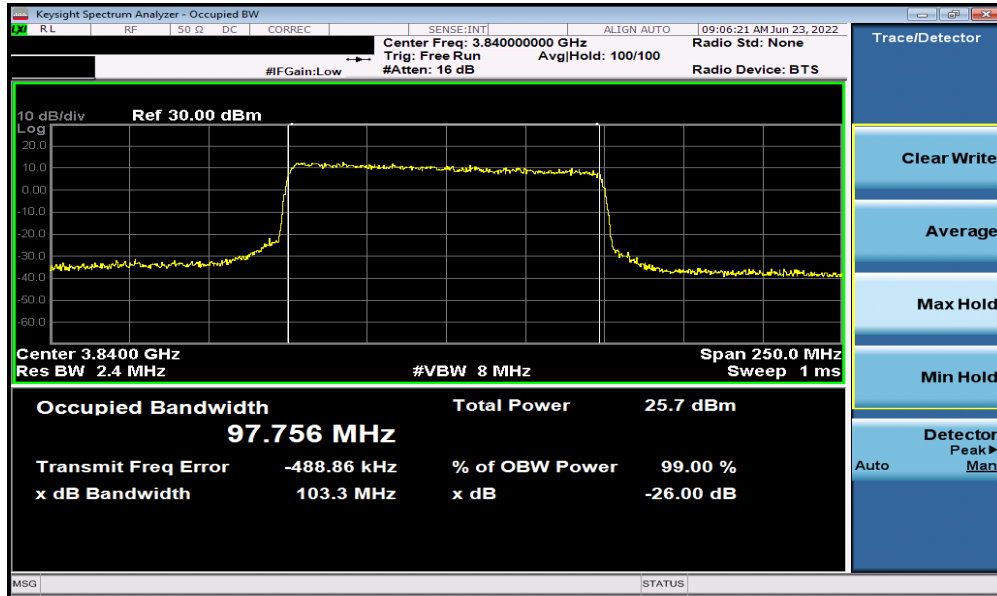


Plot 7-33. Occupied Bandwidth Plot (NR Band n77 - 100MHz 16-QAM - Full RB – ANT5)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 32 of 110

NR Band n77 PC3 – ANT8

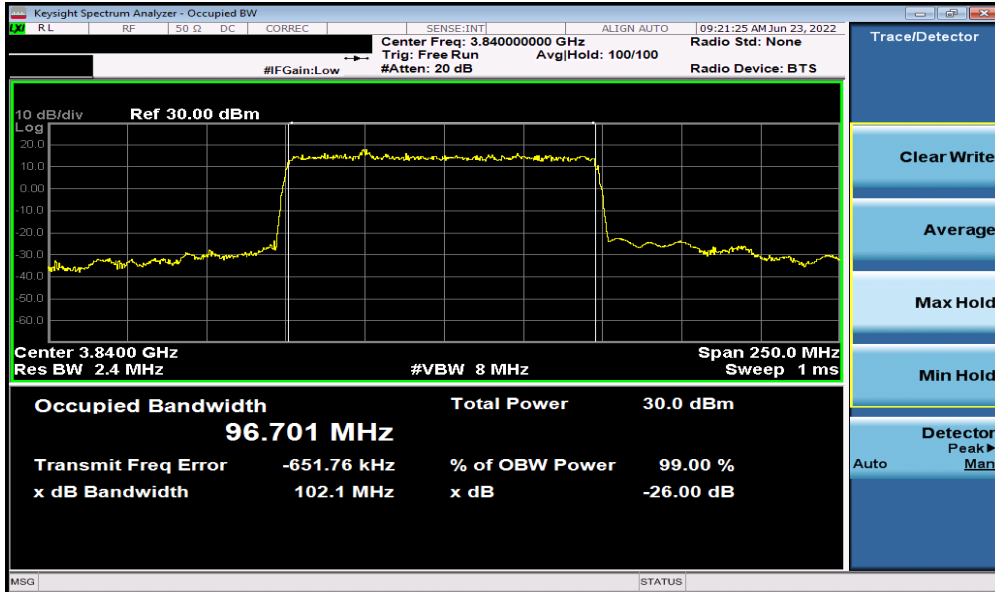


Plot 7-34. Occupied Bandwidth Plot (NR Band n77 - 100MHz $\pi/2$ BPSK - Full RB – ANT8)

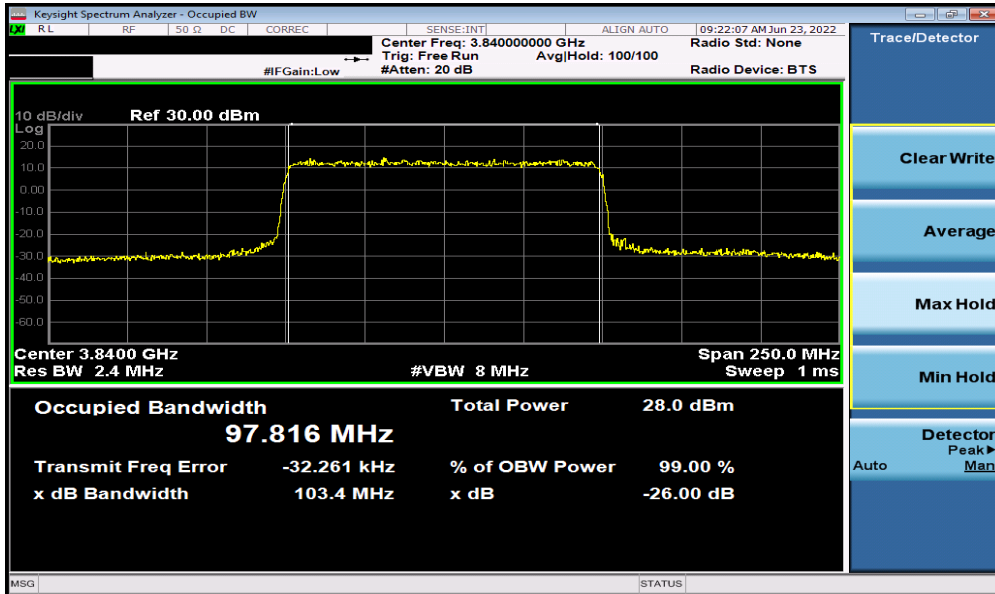

Plot 7-35. Occupied Bandwidth Plot (NR Band n77 - 100MHz QPSK - Full RB – ANT8)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 33 of 110

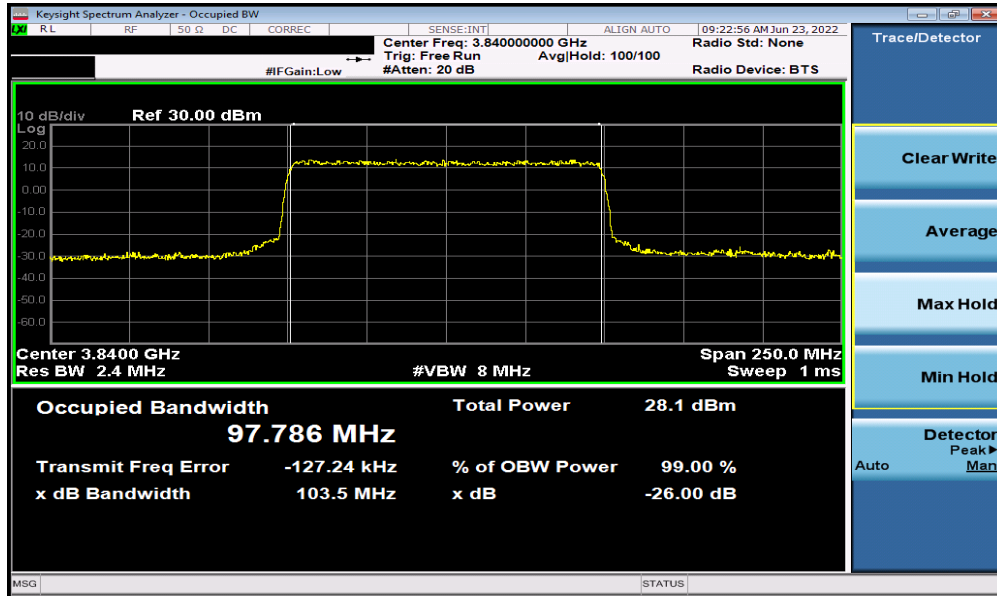

Plot 7-36. Occupied Bandwidth Plot (NR Band n77 - 100MHz 16-QAM - Full RB – ANT8)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 34 of 110

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For operations in the 3700 – 3980MHz band, the maximum permissible conducted power level of any spurious emission is -13dBm/MHz.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to the tenth harmonic of the highest transmit frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

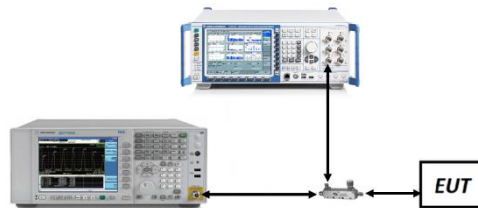


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

1. Per Part 27.53(l), and RSS-199, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 35 of 110

V3.0 1/6/2022

NR Band n77 – ANT2

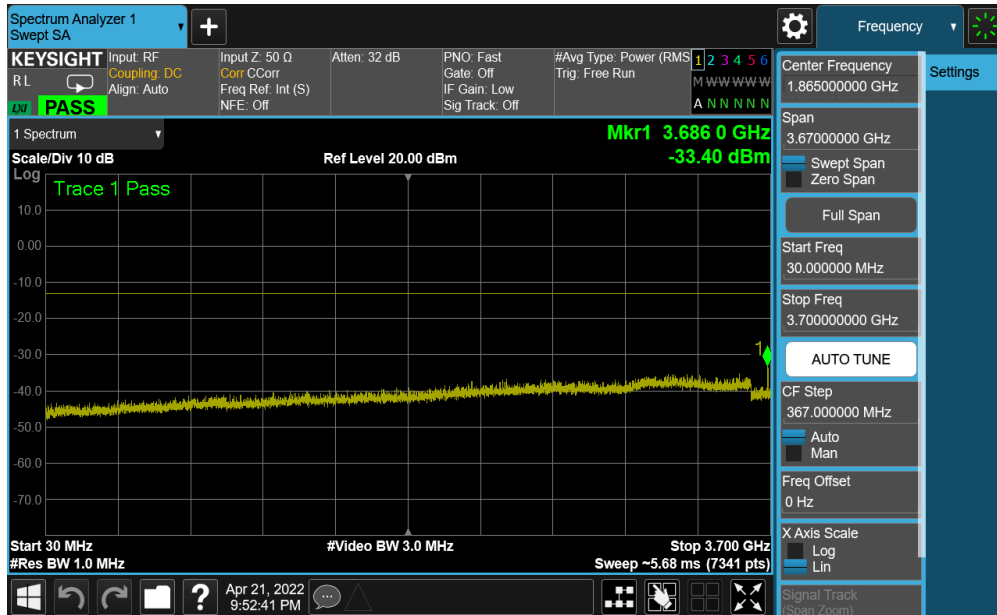


Plot 7-37. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - ANT2)

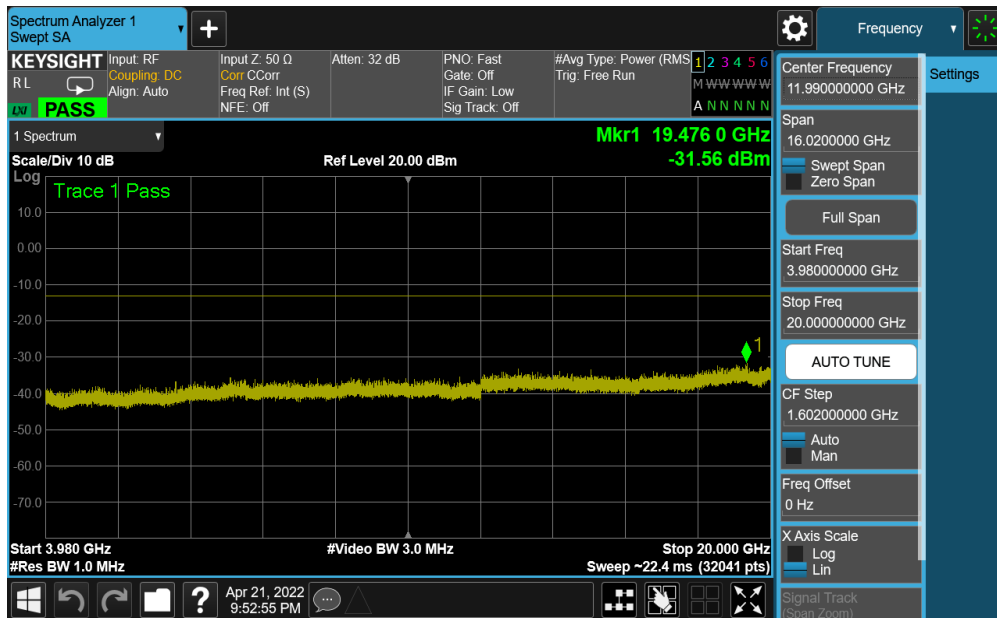


Plot 7-38. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 36 of 110

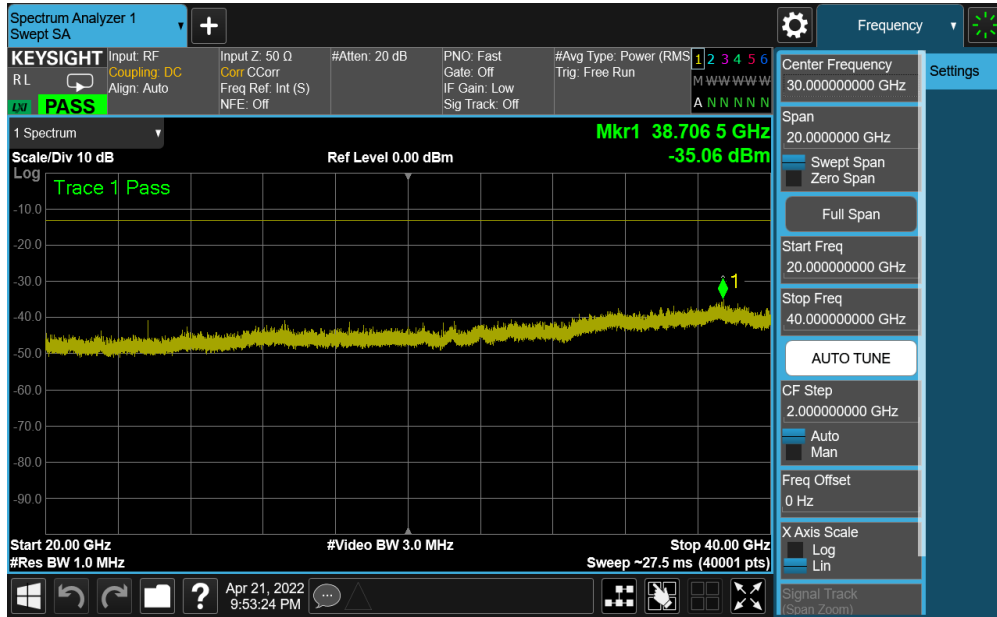


Plot 7-39. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - ANT2)

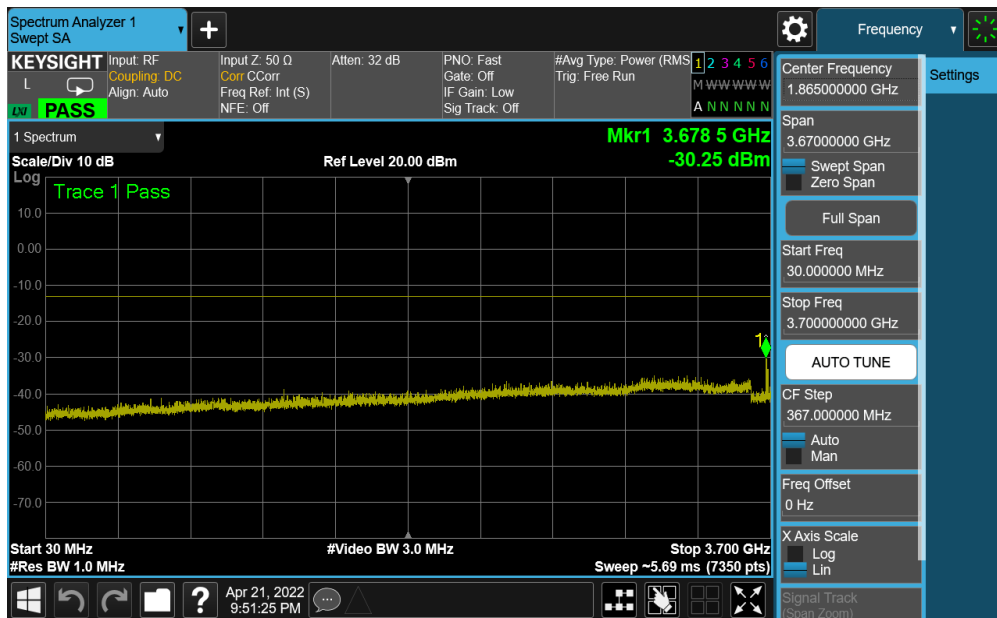


Plot 7-40. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 37 of 110

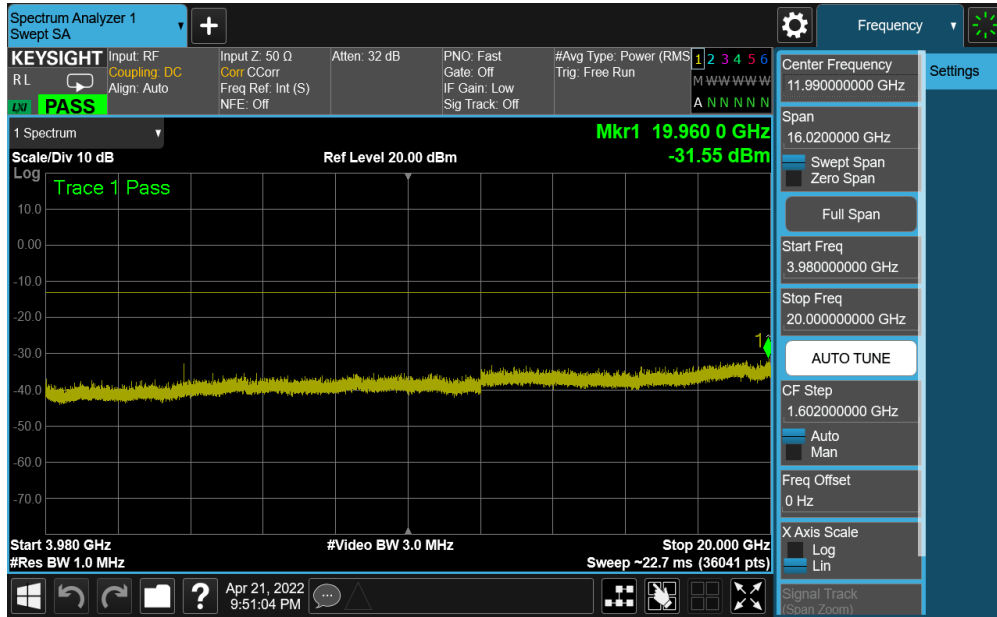


Plot 7-41. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - ANT2)

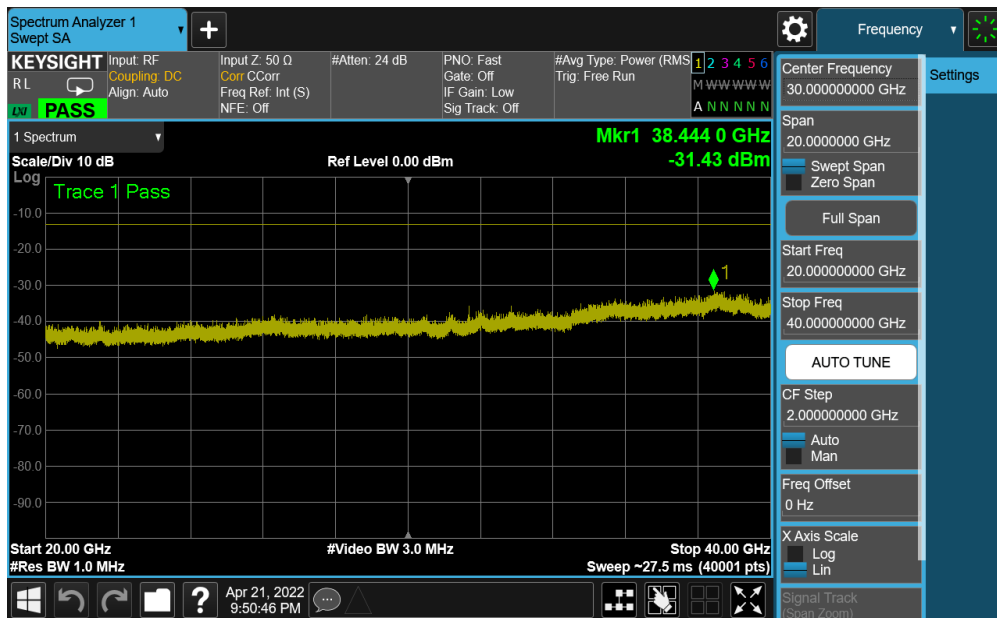


Plot 7-42. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 38 of 110

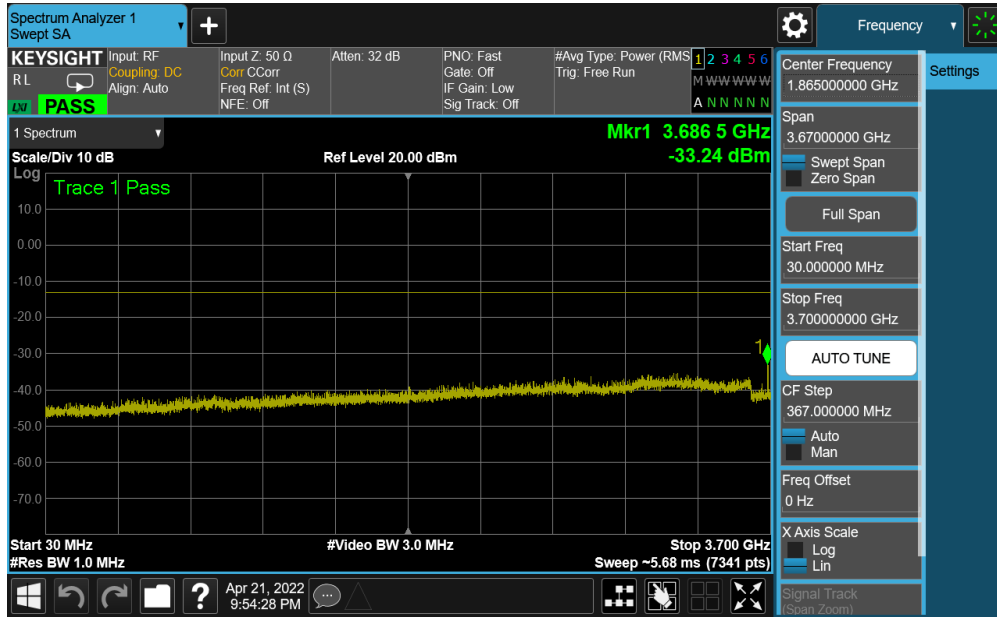


Plot 7-43. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - ANT2)

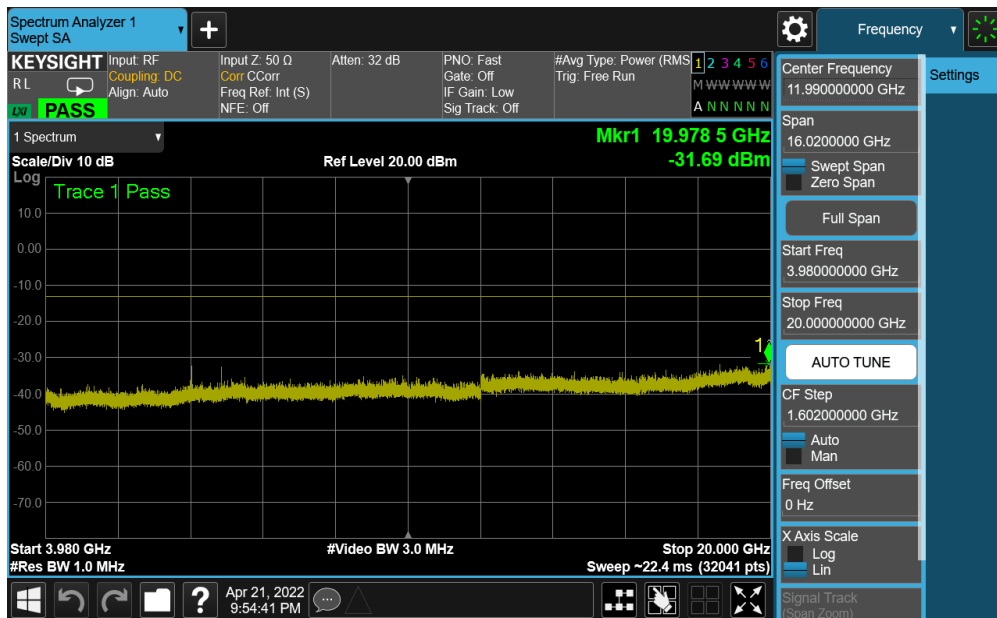


Plot 7-44. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 39 of 110

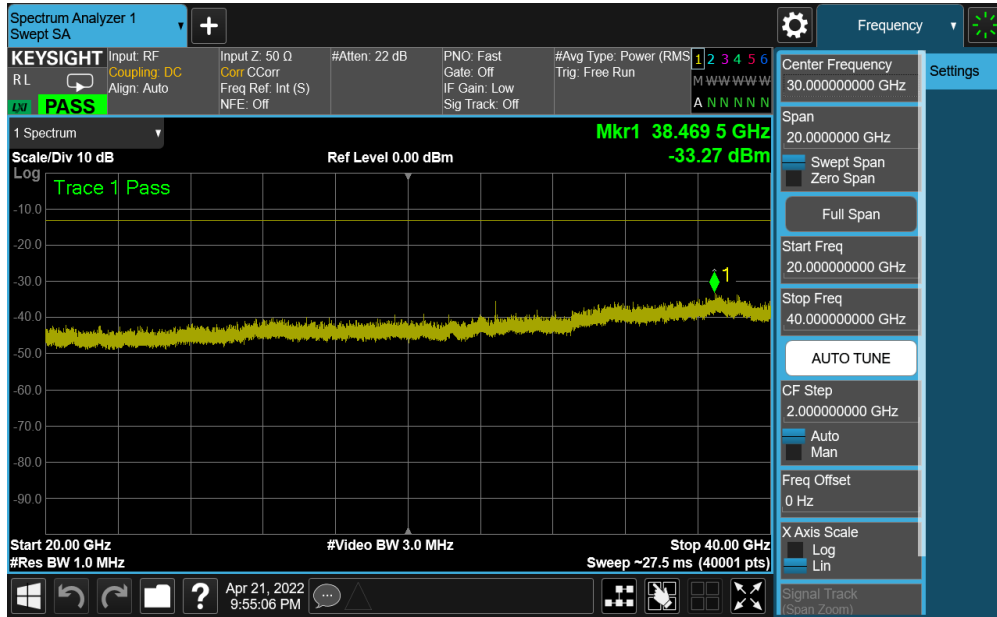


Plot 7-45. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - ANT2)

NR Band n77 – ANT3

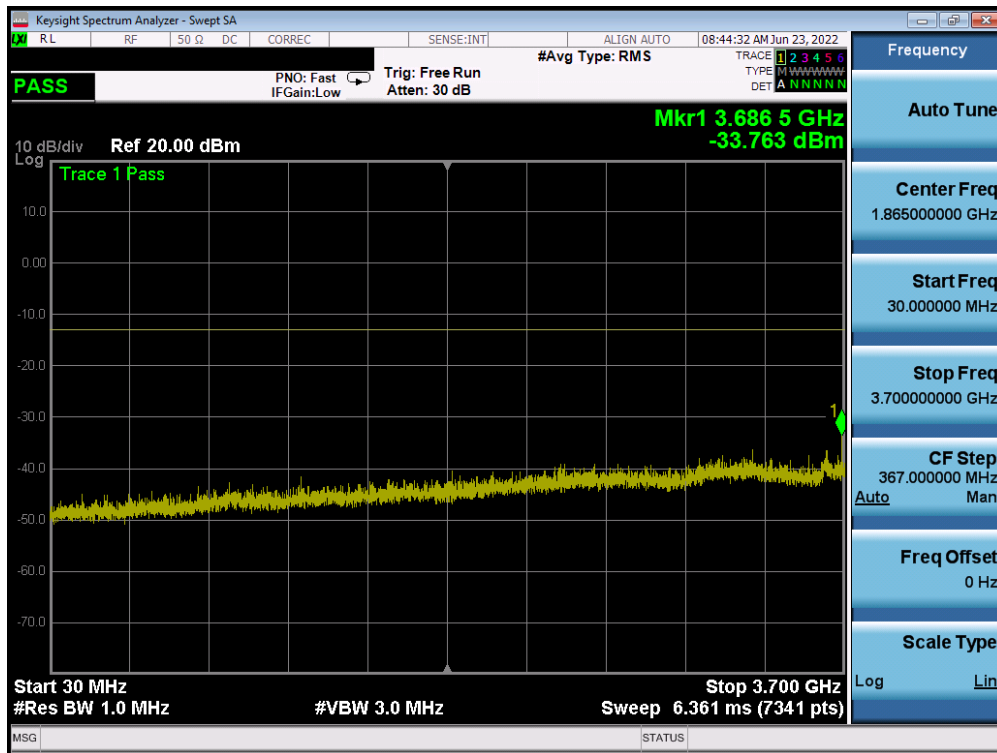


Plot 7-46. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 3)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 40 of 110

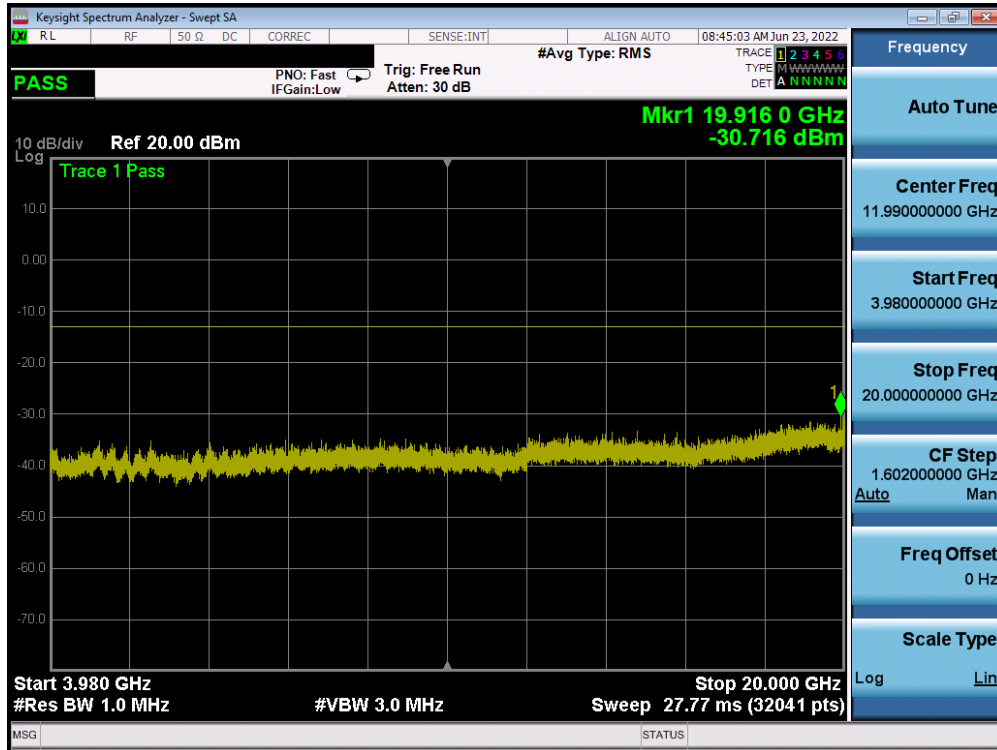


Plot 7-47. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 3)

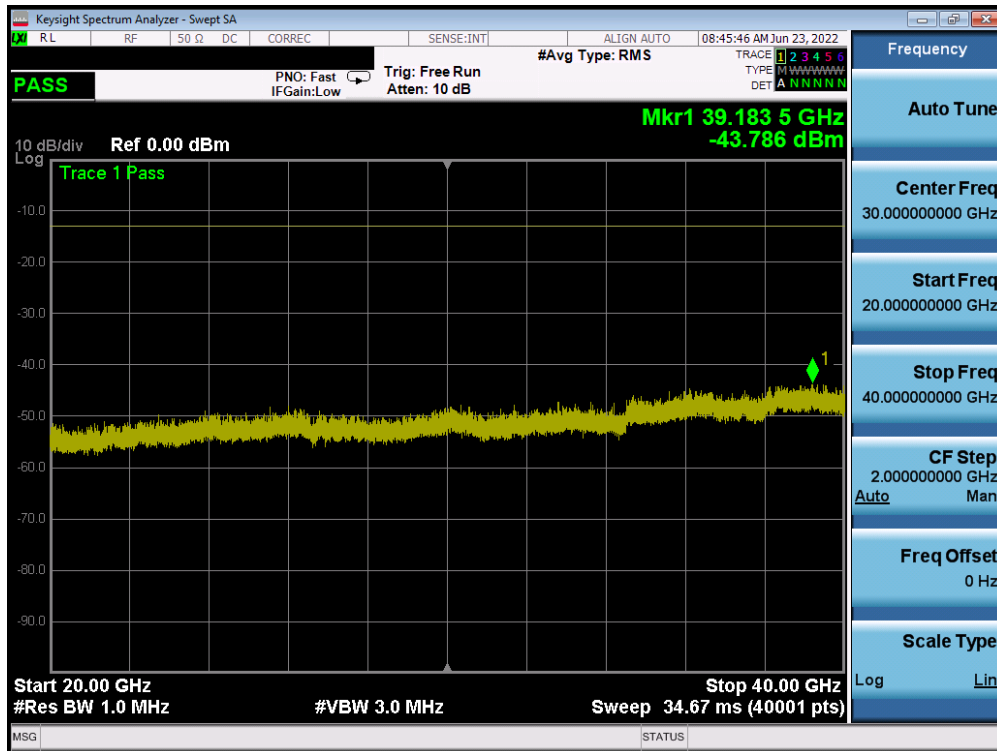


Plot 7-48. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 3)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 41 of 110

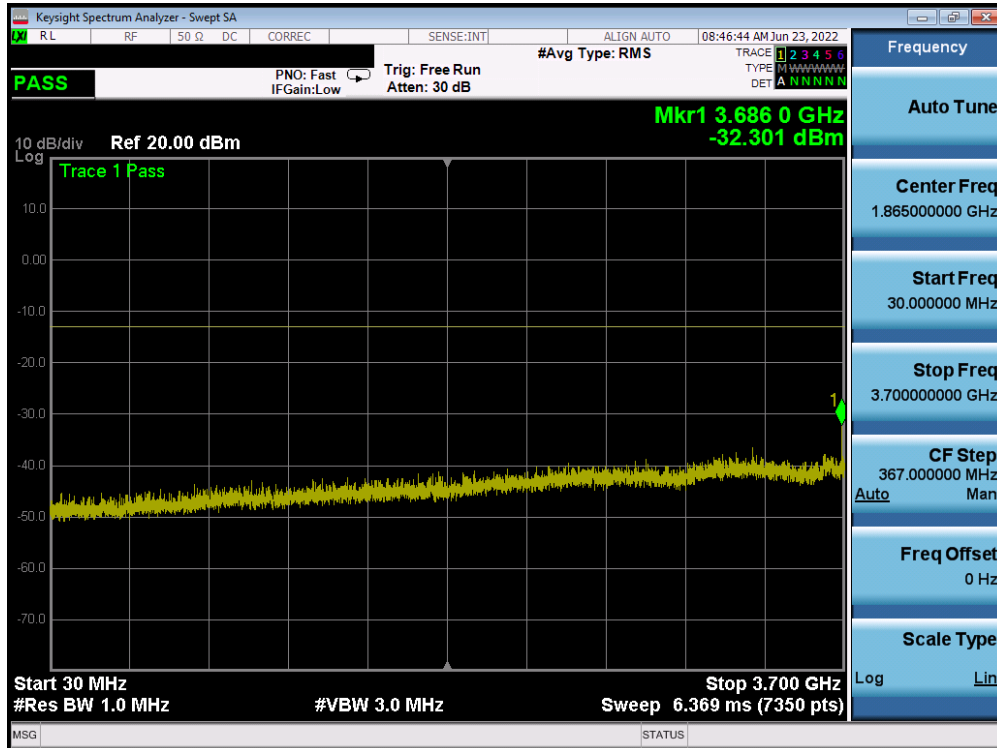


Plot 7-49. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 3)

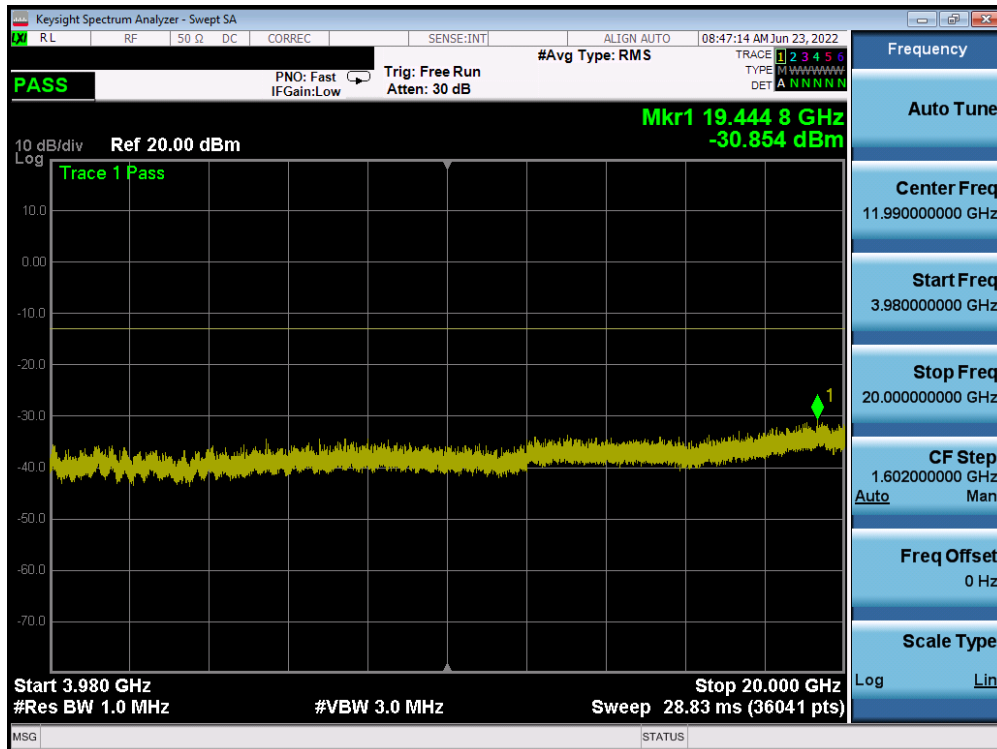


Plot 7-50. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 3)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 42 of 110

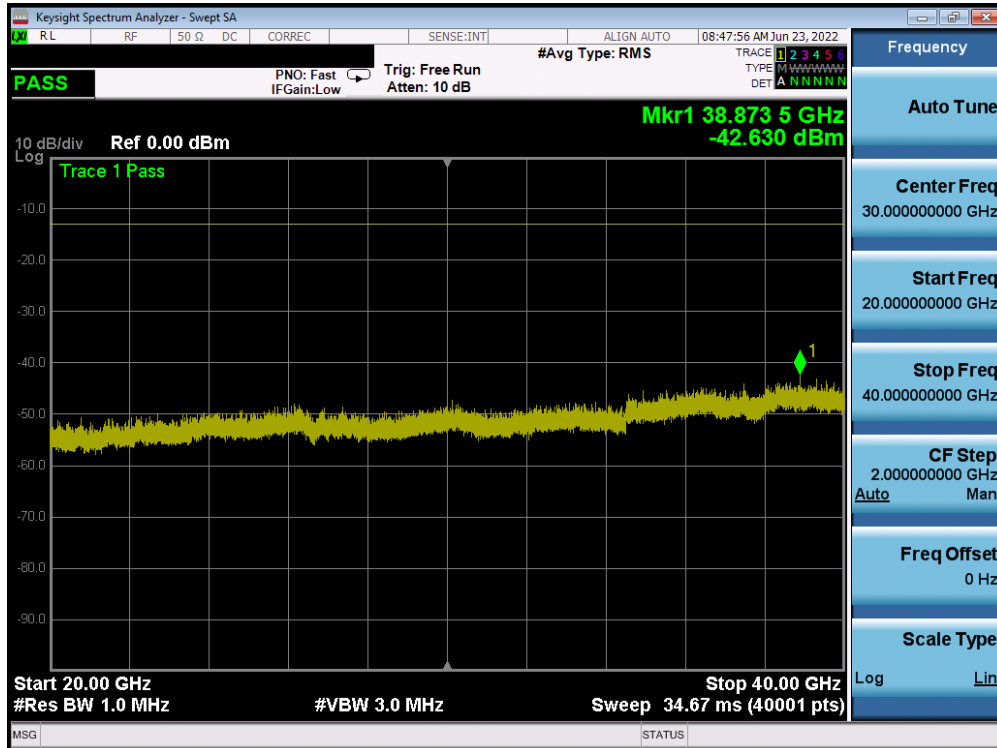


Plot 7-51. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 3)

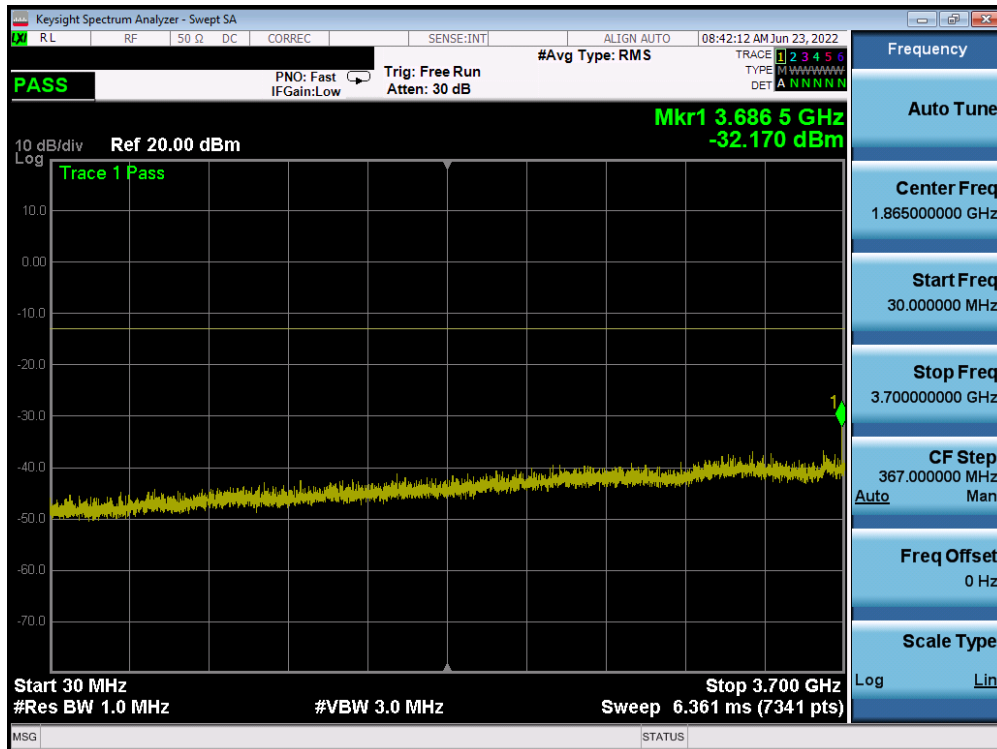


Plot 7-52. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 3)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 43 of 110

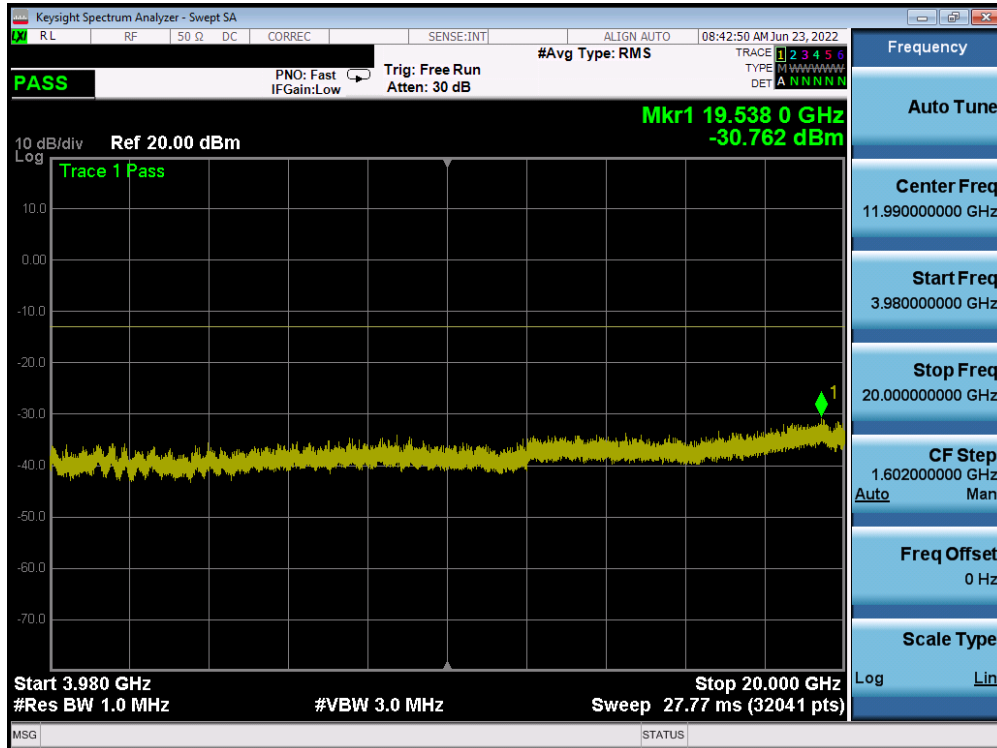


Plot 7-53. Conducted Spurious Plot (NR Band n77- 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 3)

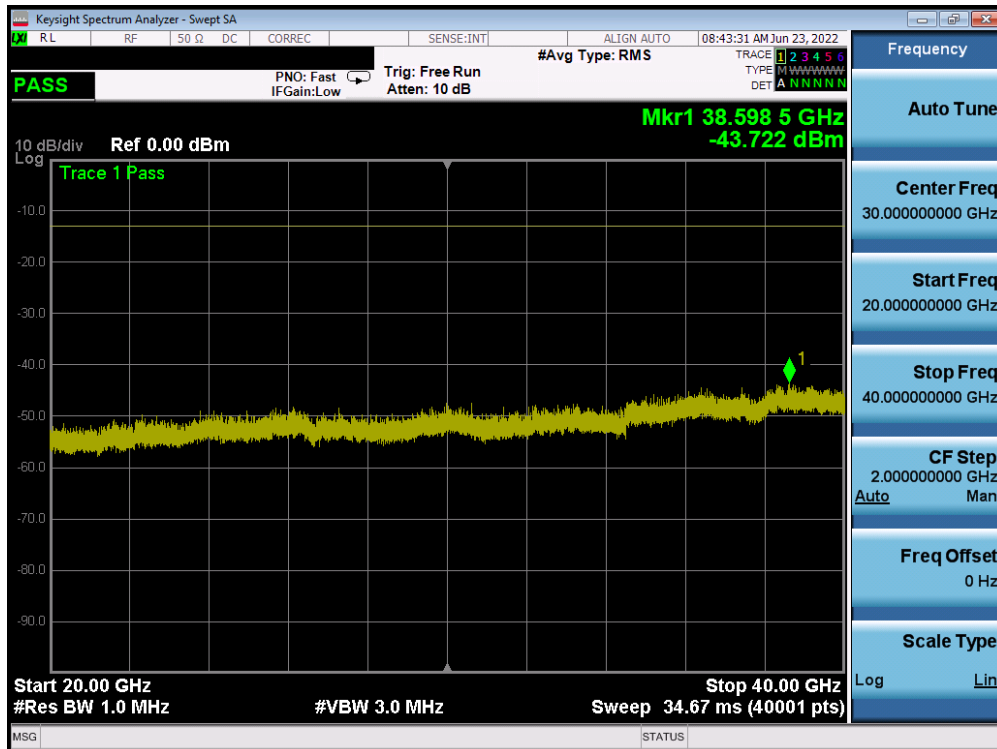


Plot 7-54. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 3)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 44 of 110

NR Band n77 – ANT5

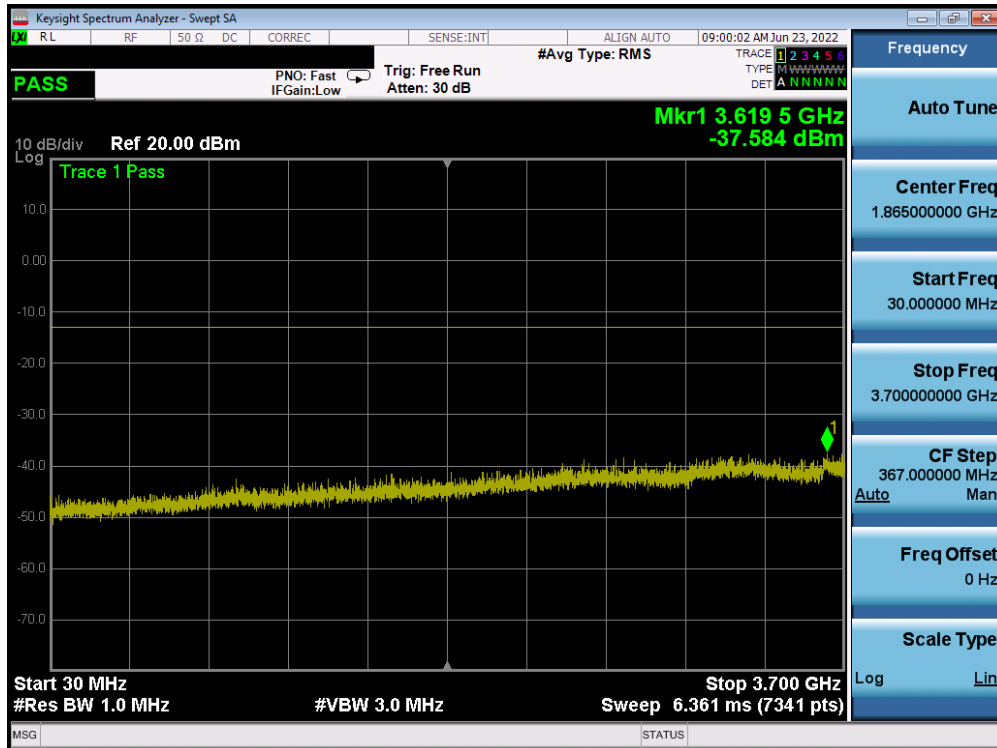


Plot 7-55. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 5)

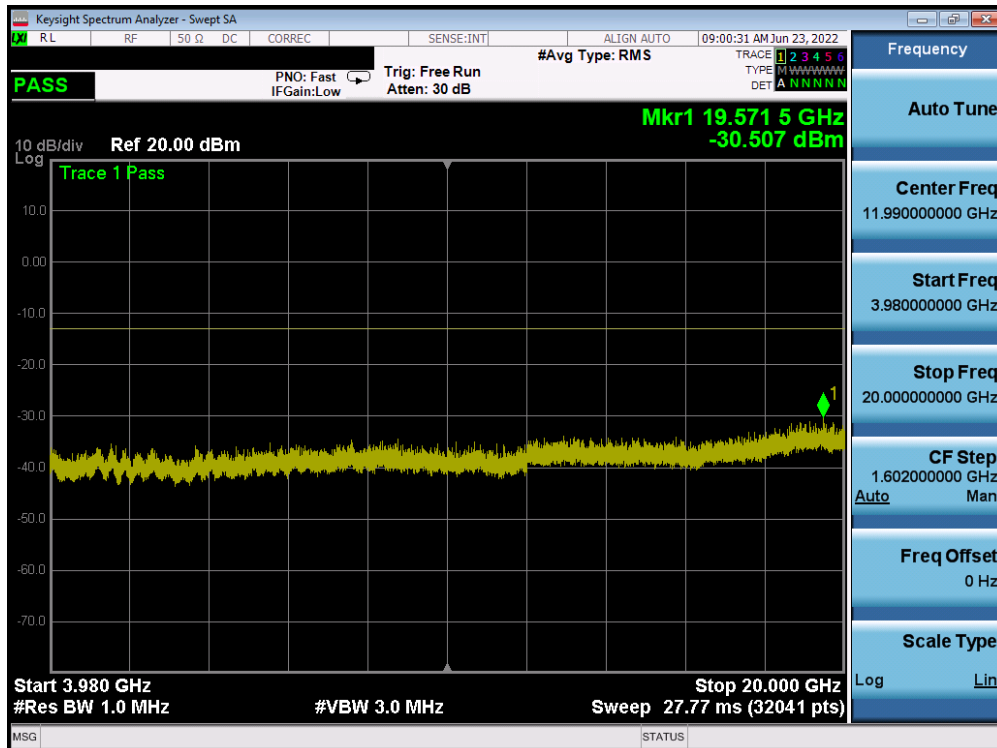


Plot 7-56. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 5)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 45 of 110

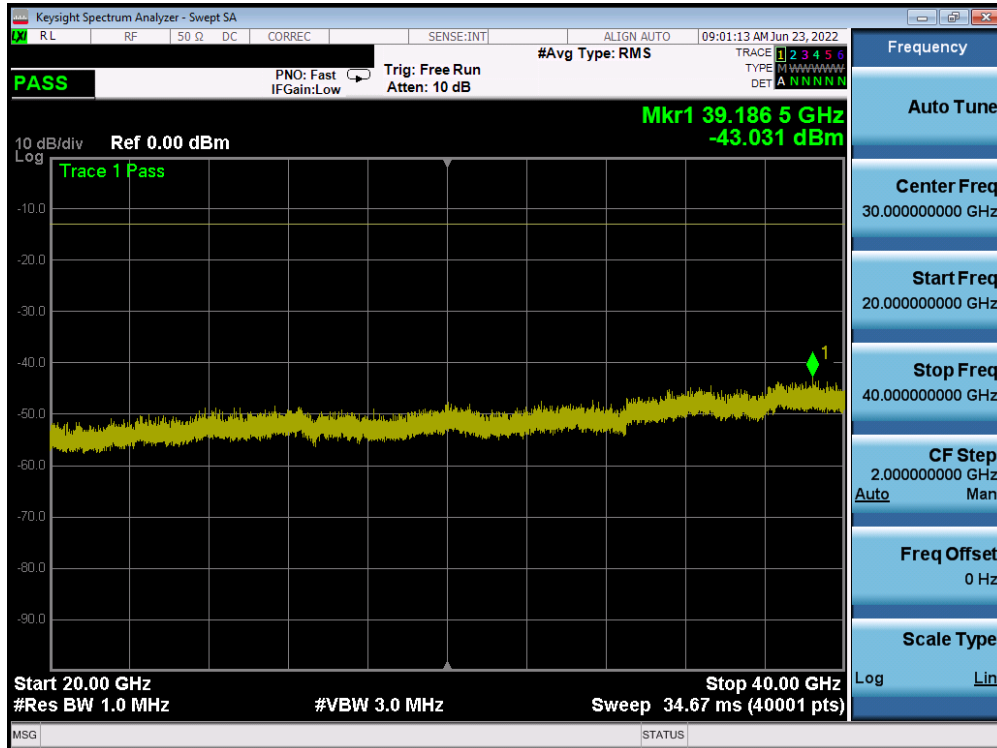


Plot 7-57. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 5)

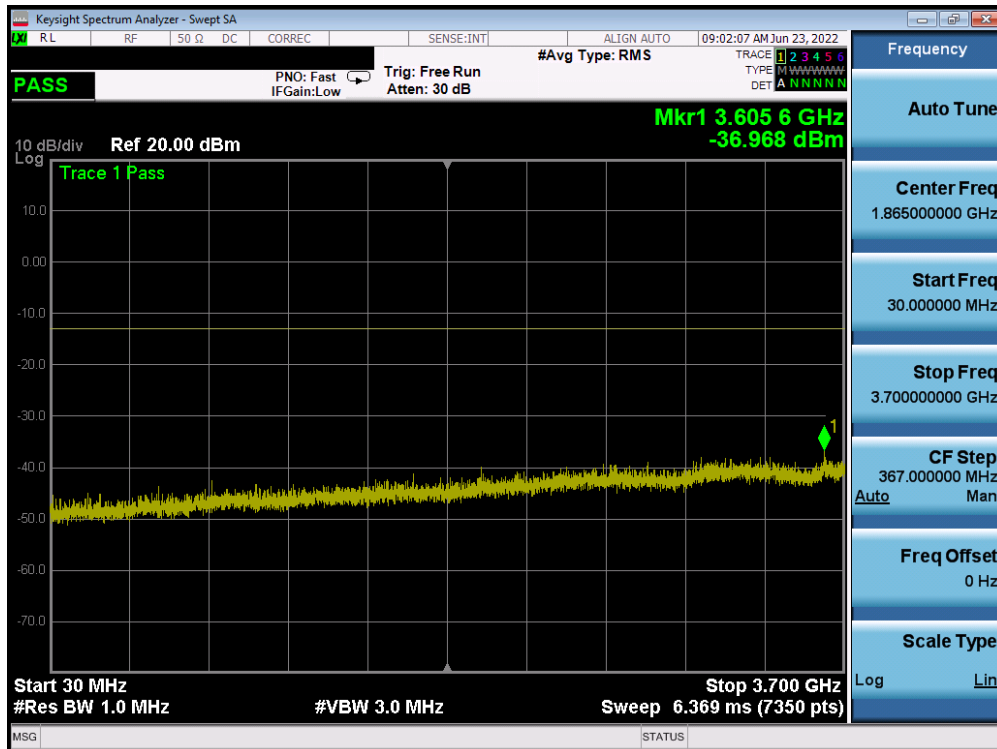


Plot 7-58. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 5)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 46 of 110

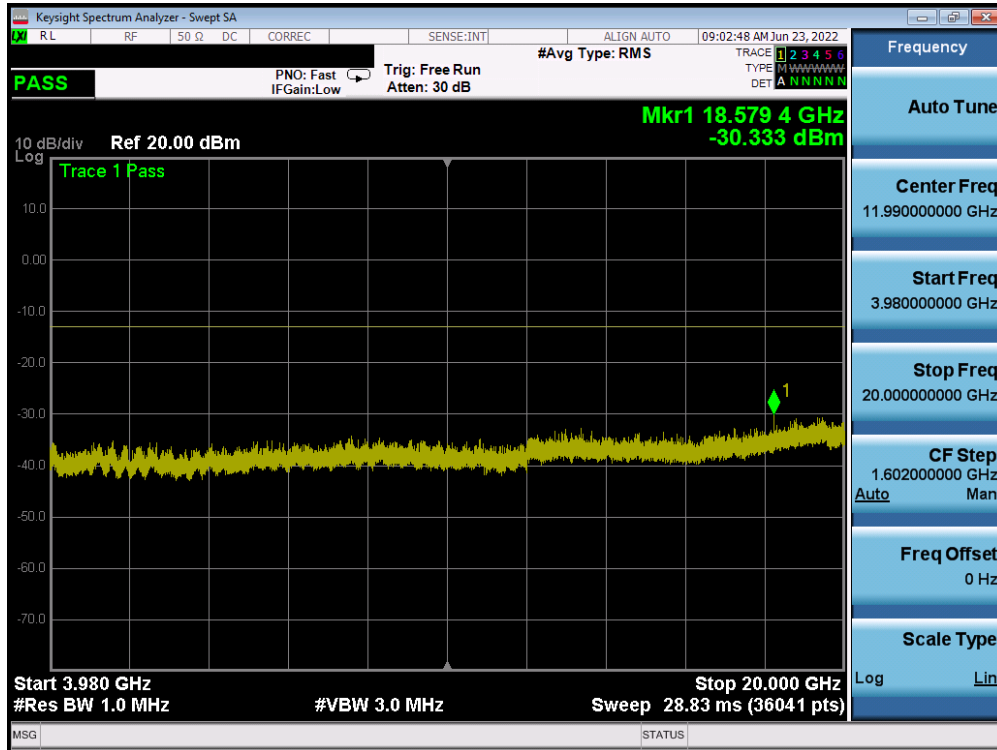


Plot 7-59. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 5)

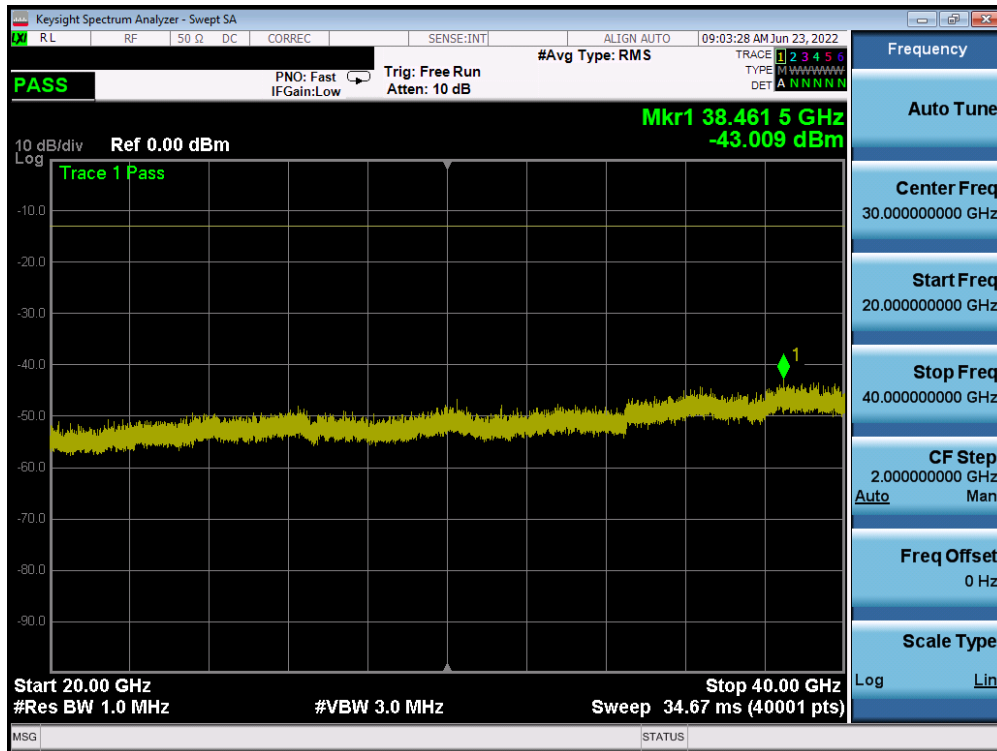


Plot 7-60. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 5)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 47 of 110

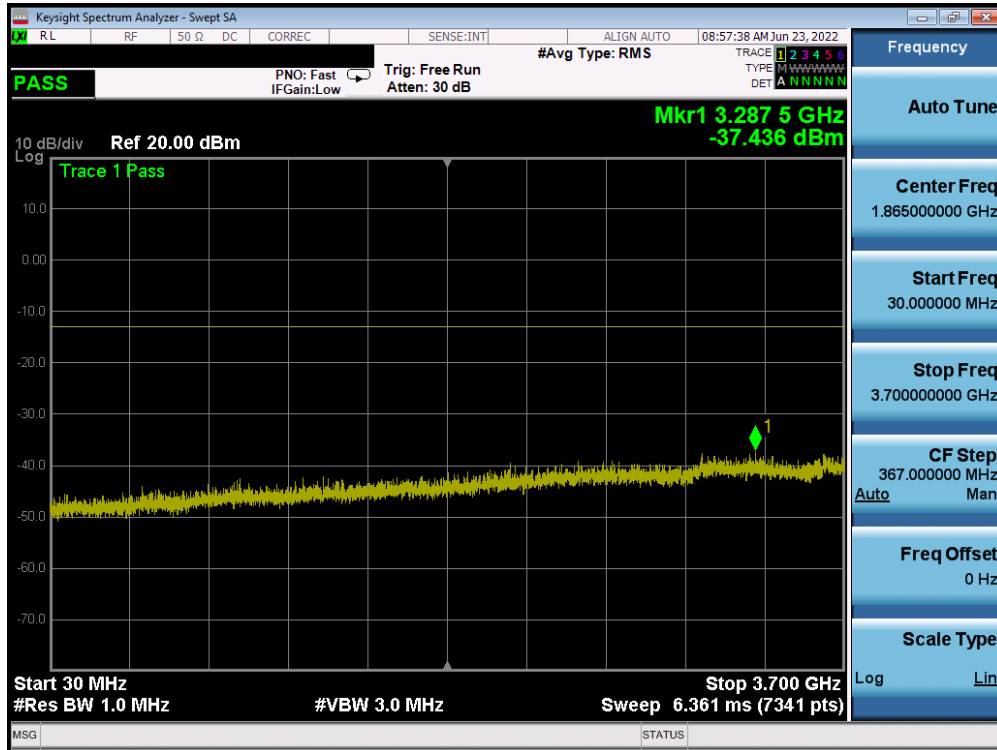


Plot 7-61. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 5)

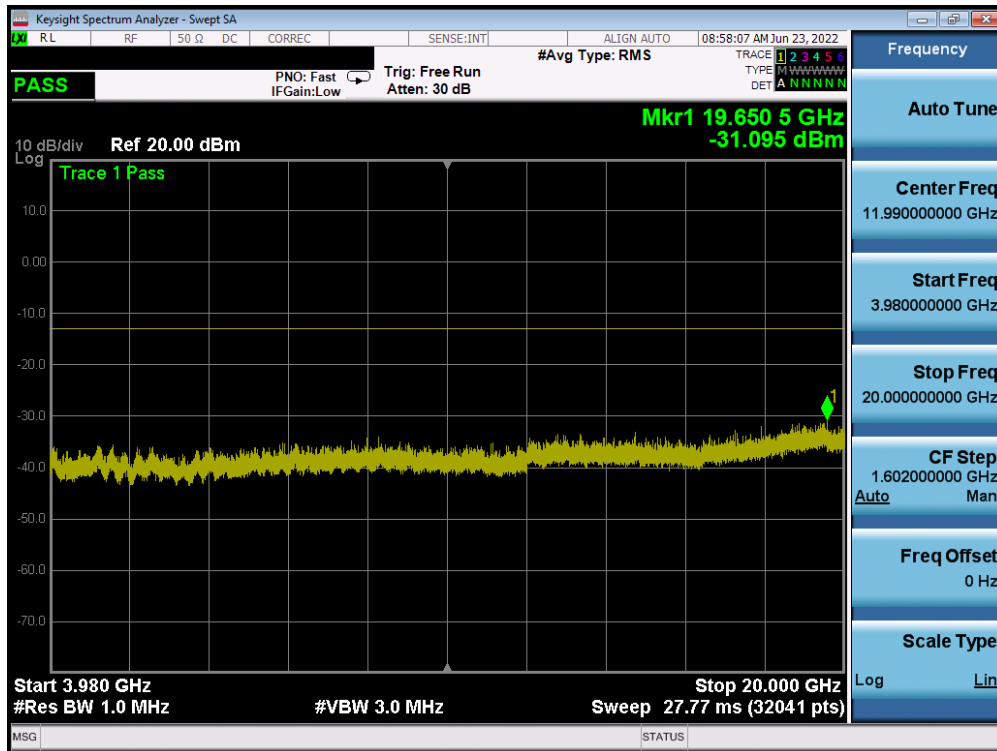

Plot 7-62. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 5)


FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 48 of 110

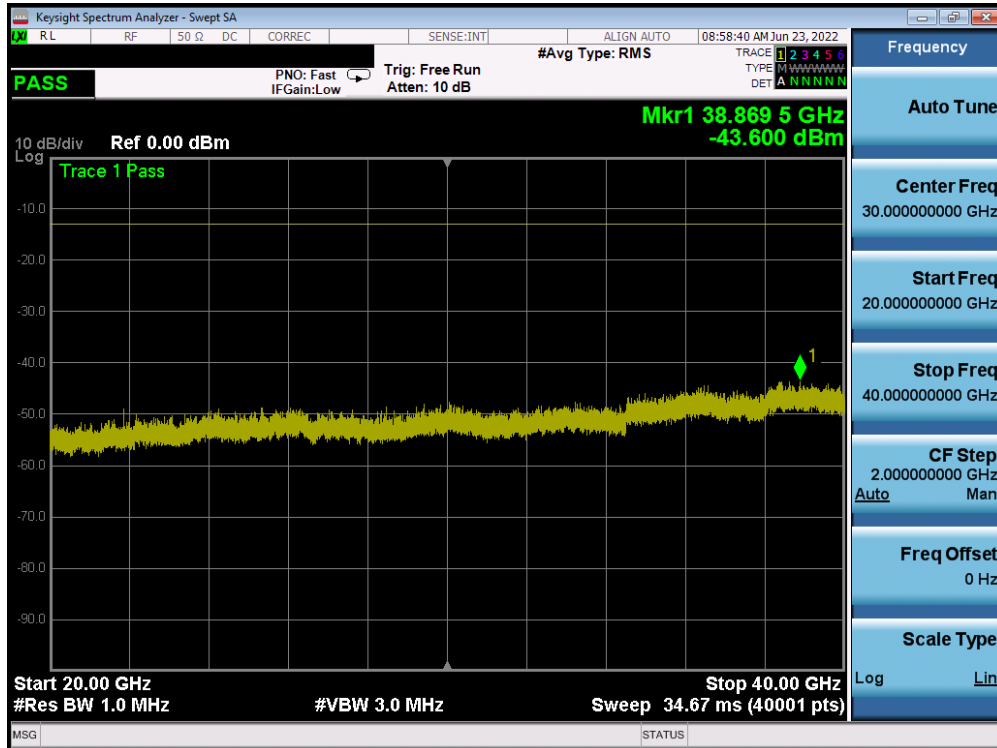


Plot 7-63. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 5)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 49 of 110

NR Band n77 – ANT8

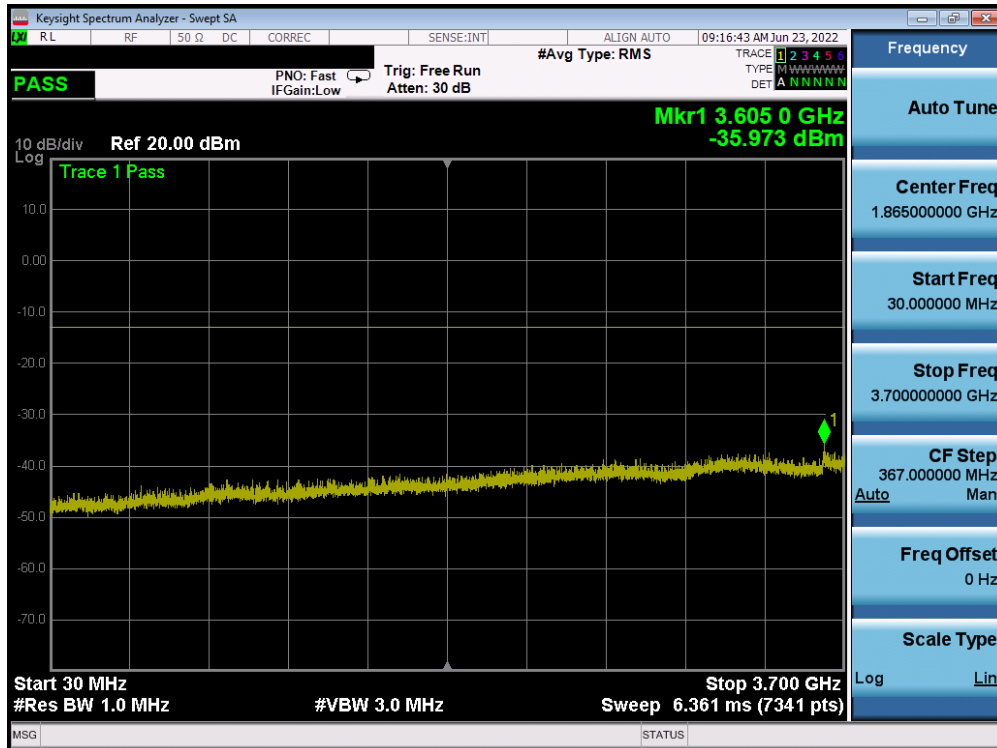


Plot 7-64. Conducted Spurious Plot (NR Band n77- 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel- Ant 8)

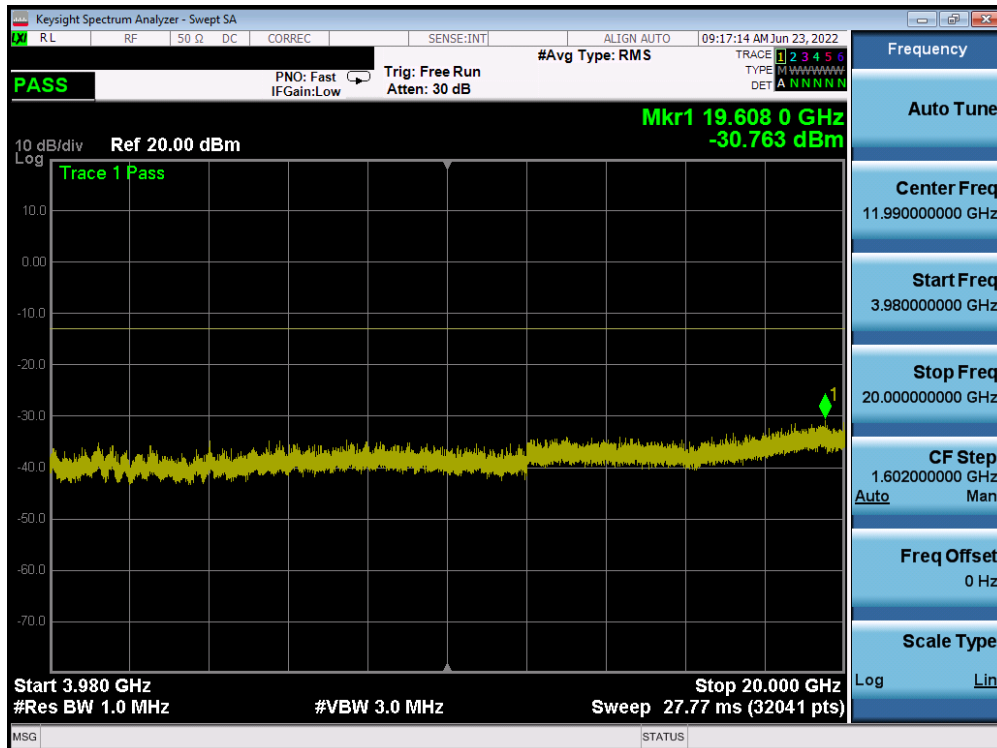


Plot 7-65. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 8)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 50 of 110

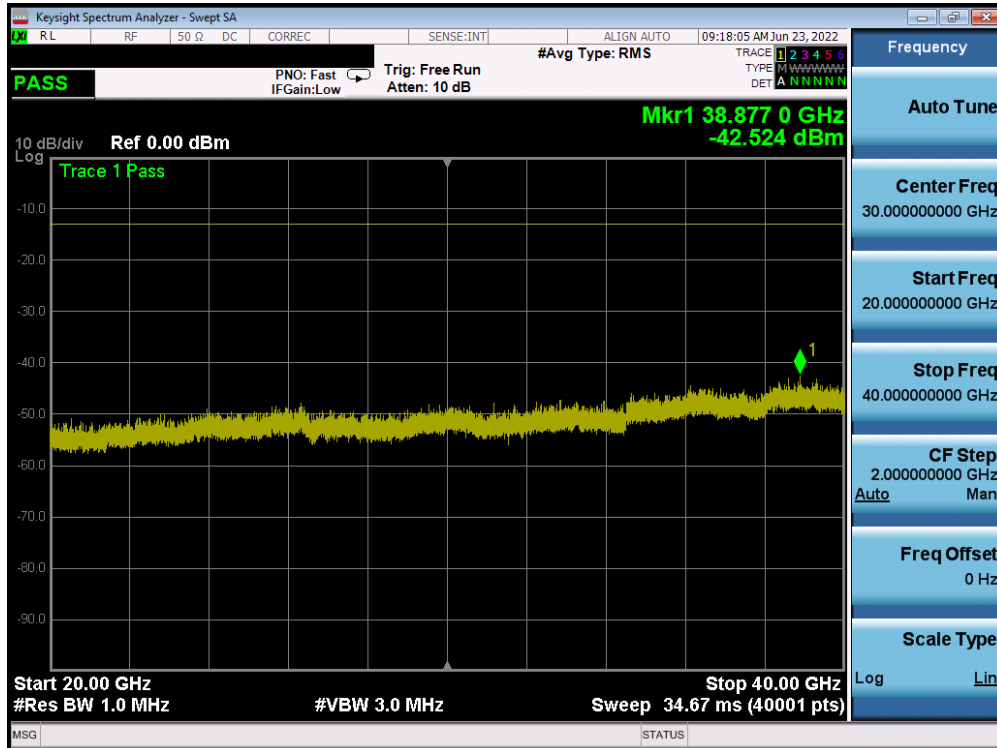


Plot 7-66. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Low Channel - Ant 8)

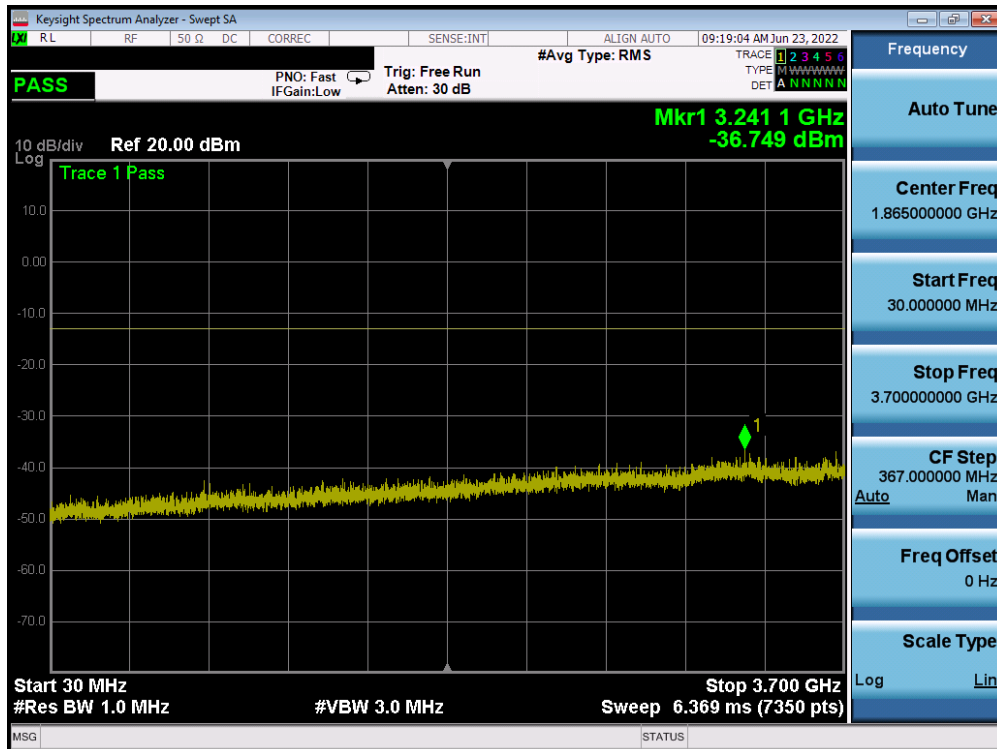


Plot 7-67. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 8)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 51 of 110

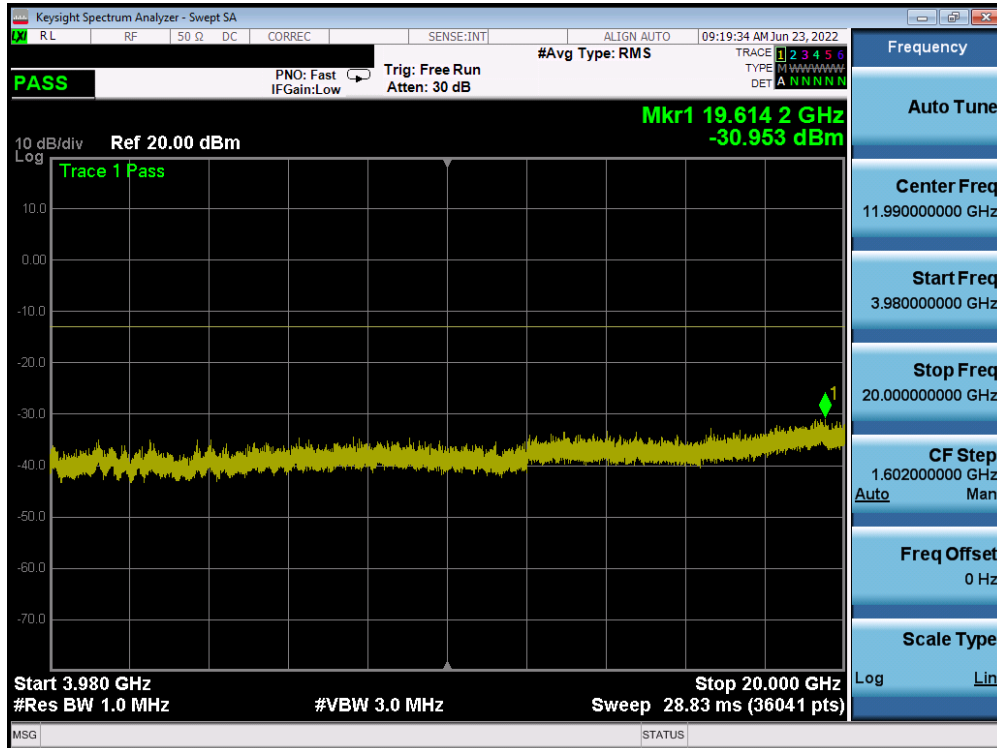


Plot 7-68. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 8)

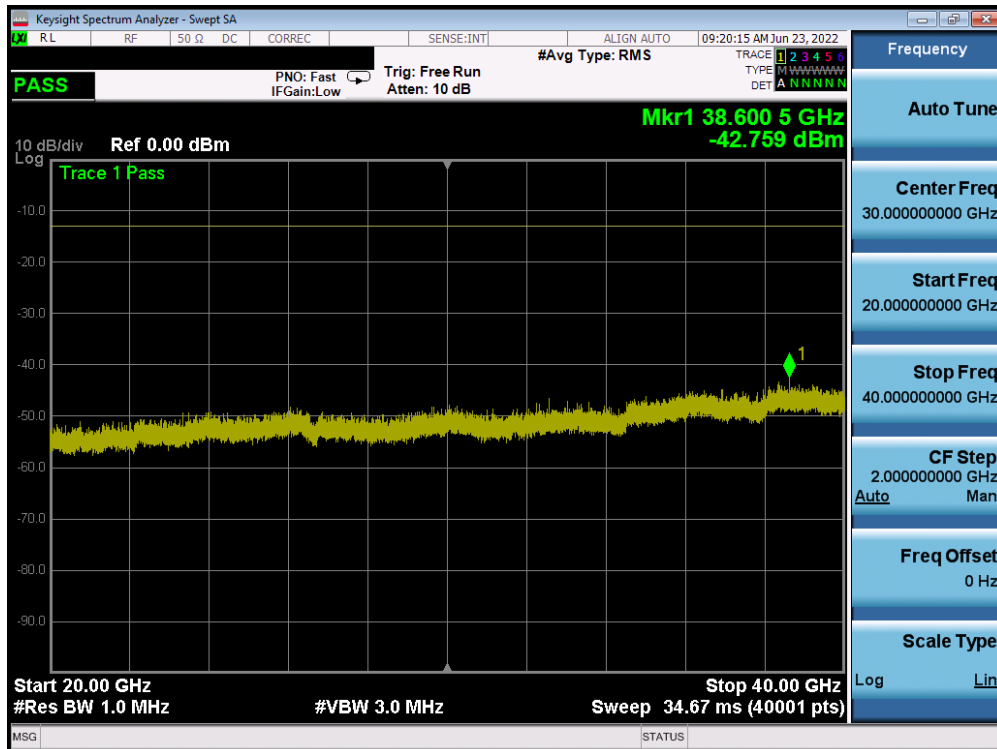


Plot 7-69. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel - Ant 8)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 52 of 110

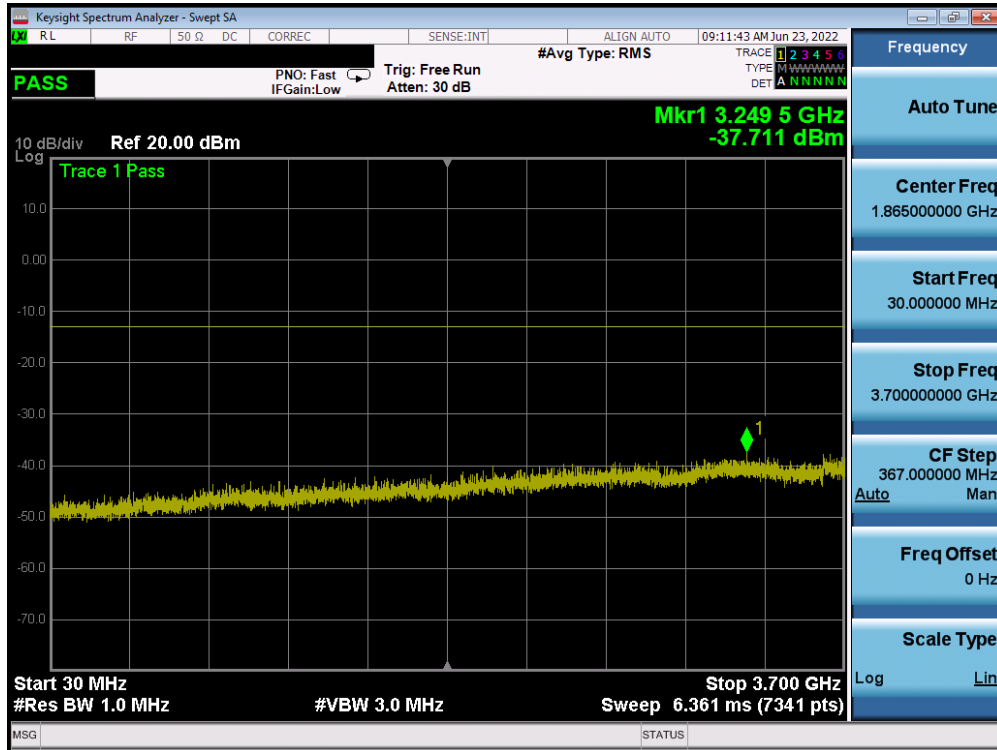


Plot 7-70. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 8)

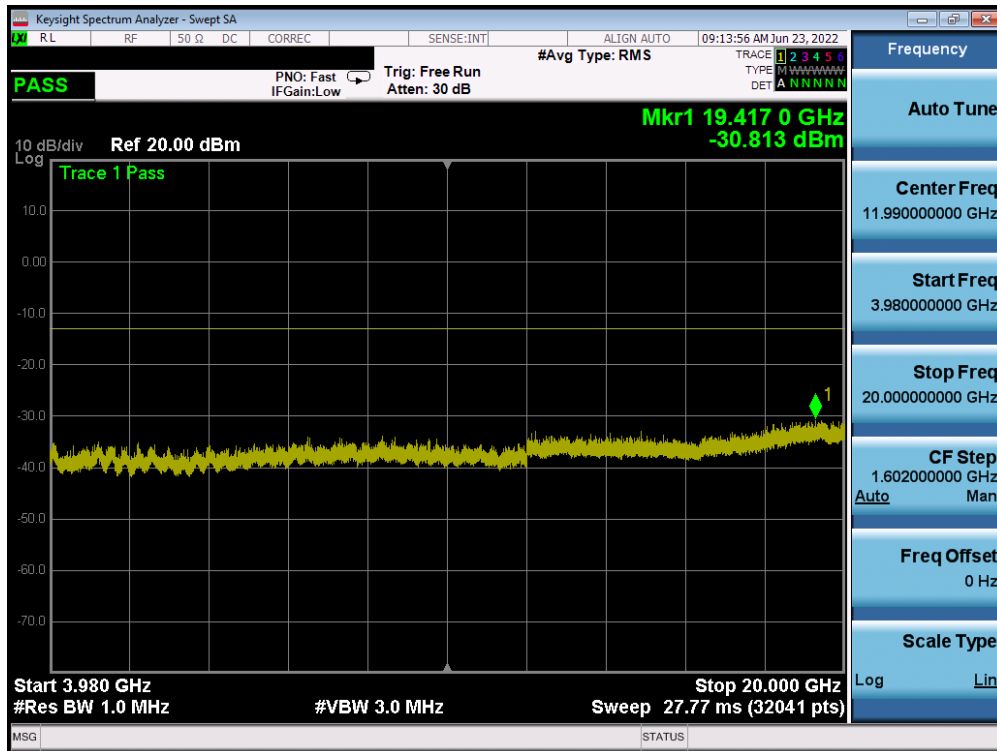

Plot 7-71. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - ANT8)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 53 of 110

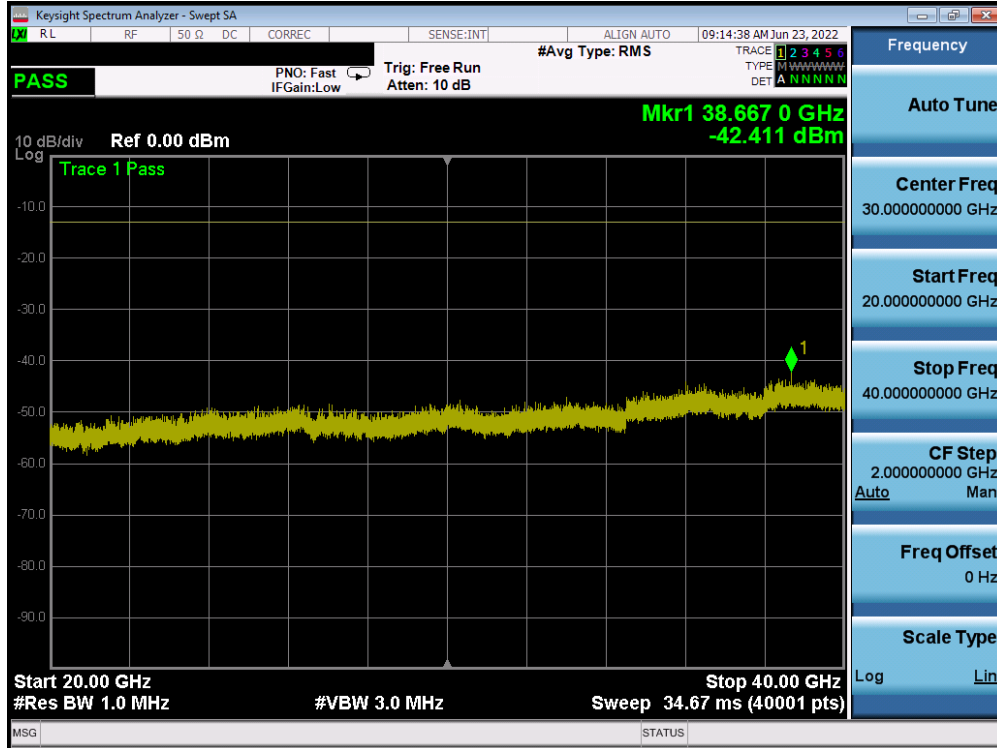

Plot 7-72. Conducted Spurious Plot (NR Band n77 - 100MHz QPSK - RB Size 1, RB Offset 0 - High Channel - Ant 8)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 54 of 110

7.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For operations in the 3700 – 3980MHz band, the maximum permissible conducted power level of any out-of-band emission is -13dBm/MHz.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

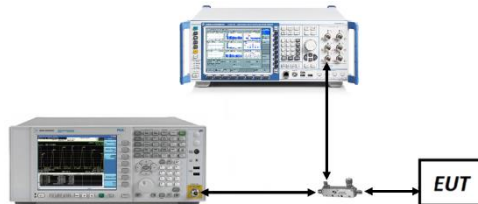


Figure 7-4. Test Instrument & Measurement Setup

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 55 of 110


V3.0 1/6/2022

Test Notes


1. Per Part 27.53(l), compliance with the -13dBm/MHz conducted power limit for out-of-band emissions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.
2. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
3. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 56 of 110

NR Band n77 – ANT2

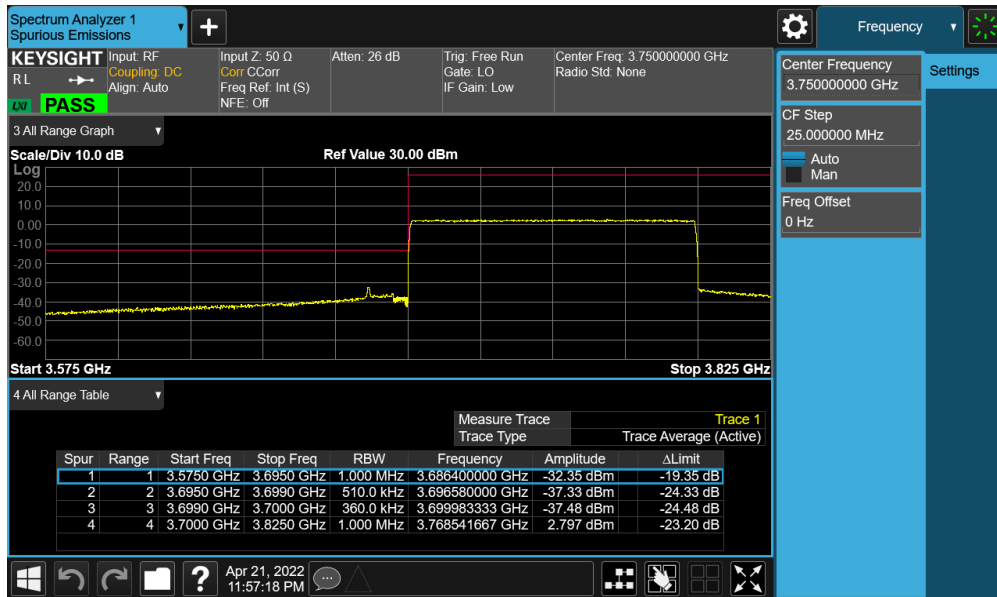


Plot 7-73. Lower ACP Plot (NR Band n77 - 100MHz CP-OFDM-QPSK – Full RB - ANT2)

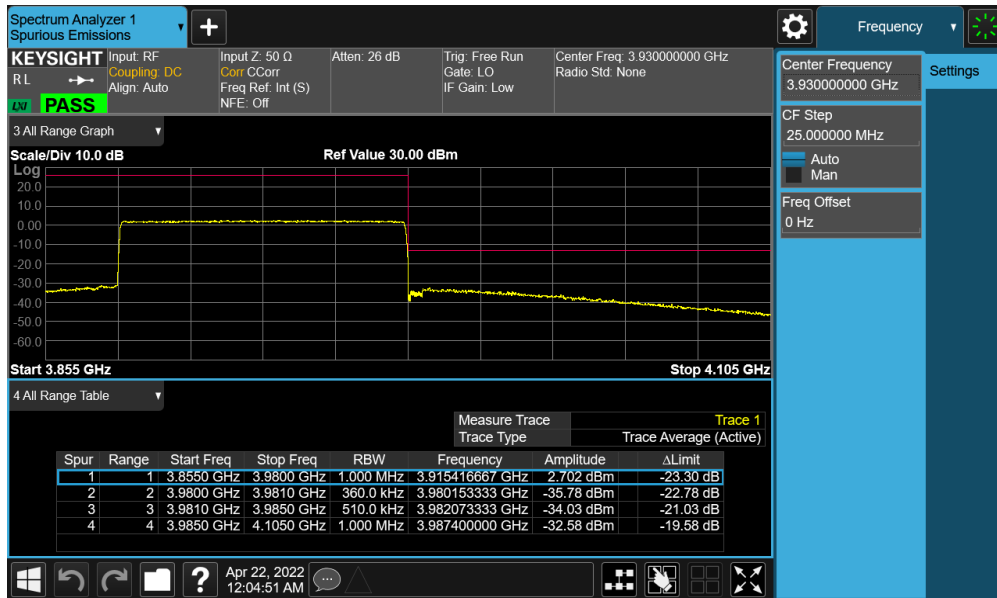

Plot 7-74. Upper ACP Plot (NR Band n77 - 100MHz CP-OFDM-QPSK – Full RB - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 57 of 110

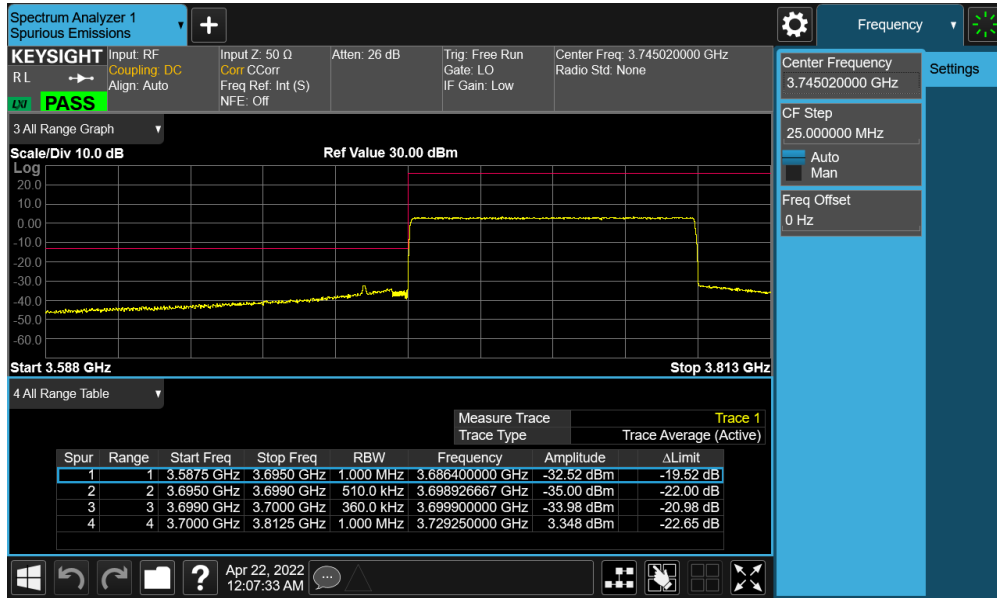

Plot 7-75. Lower ACP Plot (NR Band n77 - 90MHz CP-OFDM-QPSK – Full RB - ANT2)



Plot 7-76. Upper ACP Plot (NR Band n77 - 90MHz CP-OFDM-QPSK – Full RB - ANT2)

FCC ID: C3K1997	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204040049-08-R1.C3K	Test Dates: 03/30/2022- 06/24/2022	EUT Type: Portable Computing Device	Page 58 of 110