

**MEASUREMENT REPORT  
FCC PART 15.407 UNII**

**Applicant Name:**  
Microsoft Corporation  
One Microsoft Way  
Redmond, WA 98052  
United States

**Date of Testing:**  
3/14/2022-7/1/2022  
**Test Report Issue Date:**  
7/11/2022  
**Test Site/Location:**  
Element, Columbia, MD, USA  
**Test Report Serial No.:**  
1M2204040049-15-R1.C3K

<b>FCC ID:</b>	<b>C3K1997</b>
<b>APPLICANT:</b>	<b>Microsoft Corporation</b>

**Application Type:** Certification  
**Model:** 1997  
**EUT Type:** Portable Computing Device  
**Frequency Range:** 5180 – 5825MHz  
**Modulation Type:** OFDM  
**FCC Equipment Class:** Unlicensed National Information Infrastructure TX (NII)  
**FCC Rule Part(s):** Part 15 Subpart E (15.407)  
**Test Procedure(s):** ANSI C63.10-2013, KDB 789033 D02 v02r01  
 ,  
 KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2204040049-15-R1.C3K) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



**RJ Ortanez**  
**Executive Vice President**



<b>FCC ID:</b> C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2204040049-15-R1.C3K	<b>Test Dates:</b> 3/14/2022-7/1/2022	<b>EUT Type:</b> Portable Computing Device	Page 1 of 284

## T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	8
2.4	Test Configuration.....	8
2.5	Software and Firmware.....	8
2.6	EMI Suppression Device(s)/Modifications.....	8
3.0	DESCRIPTION OF TESTS.....	9
3.1	Evaluation Procedure.....	9
3.2	AC Line Conducted Emissions.....	9
3.3	Radiated Emissions.....	10
3.4	Environmental Conditions.....	10
4.0	ANTENNA REQUIREMENTS.....	11
5.0	MEASUREMENT UNCERTAINTY.....	12
6.0	TEST EQUIPMENT CALIBRATION DATA.....	13
7.0	TEST RESULTS.....	14
7.1	Summary.....	14
7.2	26dB Bandwidth Measurement – 802.11a/n/ac/ax.....	15
7.3	6dB Bandwidth Measurement – 802.11a/n/ac/ax.....	74
7.4	UNII Output Power Measurement – 802.11a/n/ac/ax.....	91
7.5	Maximum Power Spectral Density – 802.11a/n/ac/ax.....	102
7.6	Radiated Spurious Emission Measurements – Above 1GHz.....	207
7.6.1	SISO Antenna-1 Radiated Spurious Emission Measurements.....	210
7.6.2	SISO Antenna-2 Radiated Spurious Emission Measurements.....	219
7.6.3	MIMO Radiated Spurious Emission Measurements.....	228
7.6.4	Simultaneous Tx Radiated Spurious Emission Measurements.....	237
7.6.5	SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW).....	249
7.6.6	SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW).....	251
7.6.7	SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW).....	253
7.6.8	SISO Antenna-1 Radiated Band Edge Measurements (160MHz BW).....	255
7.6.9	SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW).....	257
7.6.10	SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW).....	259
7.6.11	SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW).....	261
7.6.12	SISO Antenna-2 Radiated Band Edge Measurements (160MHz BW).....	263
7.6.13	MIMO Radiated Band Edge Measurements (20MHz BW).....	265
7.6.14	MIMO Radiated Band Edge Measurements (40MHz BW).....	267
7.6.15	MIMO Radiated Band Edge Measurements (80MHz BW).....	269
7.6.16	MIMO Radiated Band Edge Measurements (160MHz BW).....	271
7.7	Radiated Spurious Emissions Measurements – Below 1GHz.....	273
7.8	Line-Conducted Test Data.....	278
8.0	CONCLUSION.....	284

<b>FCC ID:</b> C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2204040049-15-R1.C3K	<b>Test Dates:</b> 3/14/2022-7/1/2022	<b>EUT Type:</b> Portable Computing Device	Page 2 of 284

## MEASUREMENT REPORT

UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	116.950	20.68	122.180	20.87	121.339	20.84
2A		5260 - 5320	125.603	20.99	117.220	20.69	120.226	20.80
2C		5500 - 5720	125.603	20.99	124.738	20.96	119.399	20.77
3		5745 - 5825	125.603	20.99	125.603	20.99	247.742	23.94
1	40	5190 - 5230	47.753	16.79	43.954	16.43	84.918	19.29
2A		5270 - 5310	96.828	19.86	99.770	19.99	195.884	22.92
2C		5510 - 5710	99.541	19.98	99.770	19.99	194.536	22.89
3		5755 - 5795	98.628	19.94	94.189	19.74	190.108	22.79
1	80	5210	42.954	16.33	42.073	16.24	85.114	19.30
2A		5290	43.251	16.36	41.400	16.17	84.723	19.28
2C		5530 - 5690	92.470	19.66	99.770	19.99	192.309	22.84
3		5775	79.068	18.98	77.446	18.89	156.675	21.95
1/2A	160	5250	39.719	15.99	39.628	15.98	79.433	19.00
2C		5570	60.534	17.82	57.943	17.63	118.304	20.73

### EUT Overview

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 3 of 284

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

**Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.**

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2204040049-15-R1.C3K	<b>Test Dates:</b> 3/14/2022-7/1/2022	<b>EUT Type:</b> Portable Computing Device	Page 4 of 284

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Microsoft Corporation Portable Computing Device FCC ID: C3K1997**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

**Test Device Serial No.:** HY220, H3220, JW220, JC220, JD220

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE)

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	122	5590	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations

Band 1		Band 2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	114	5570

Table 2-4. 802.11ac / 802.11ax (160MHz BW) Frequency / Channel Operations

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 5 of 284

**Notes:**

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		ANT1	ANT2	MIMO
		Duty Cycle [%]	Duty Cycle [%]	Duty Cycle [%]
5GHz	a	98.3	99.0	99.1
	n (HT20)	99.6	99.7	99.7
	ac (HT20)	99.6	99.6	99.6
	ax (HT20)	99.7	99.6	99.5
	n (HT40)	99.6	99.6	99.6
	ac (HT40)	99.6	99.6	99.3
	ax (HE40)	99.5	99.6	99.1
	ac (HT80)	99.3	99.3	99.2
	ax (HE80)	99.1	99.2	99.0
	ac (HT160)	99.1	99.3	99.1
	ax (HE160)	99.2	99.2	99.0

**Table 2-5. Measured Duty Cycles**

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✓	✓	✓	✓
	11n/ax (20MHz)	✓	✓	✓	✓	✓	✓
	11n/ax (40MHz)	✓	✓	✓	✓	✓	✓
	11n/ax (80MHz)	✓	✓	✓	✓	✓	✓
	11ac/ax (160MHz)	✓	✓	✓	✓	✓	✓

**Table 2-6. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support  
**SISO** = Single Input Single Output  
**SDM** = Spatial Diversity Multiplexing – MIMO function  
**CDD** = Cyclic Delay Diversity - 2Tx Function

- This device supports simultaneous transmission operation, which allows for two SISO channels to operate independently of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst-case configurations determined during testing.

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 6 of 284

**Configuration 1:** ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	11	120
Operating Frequency (MHz)	2462	5600
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-7. Config-1 (ANT1 2.4GHz & ANT2 5GHz)**

**Configuration 2:** ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	11	120
Operating Frequency (MHz)	2462	5600
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-8. Config-2 (ANT1 5GHz & ANT2 2.4GHz)**

**Configuration 3:** ANT1 transmitting in 2.4GHz mode and ANT2 in 6GHz mode

Description	2.4 GHz Emission	6 GHz Emission
Antenna	1	2
Channel	11	2
Operating Frequency (MHz)	2462	5935
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-9. Config-3 (ANT1 2.4GHz & ANT2 6GHz)**

**Configuration 4:** ANT1 transmitting in 6GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	6 GHz Emission
Antenna	2	1
Channel	11	2
Operating Frequency (MHz)	2462	5935
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-10. Config-4 (ANT1 5GHz & ANT2 2.4GHz)**

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 7 of 284

**Configuration 5:** ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	11	120
Operating Frequency (MHz)	2462	5600
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-11. Config-5 (ANT1 MIMO & ANT2 MIMO)**

**Configuration 6:** ANT1 and ANT2 both transmitting in 2.4GHz and 6GHz modes simultaneously

Description	2.4 GHz Emission	6 GHz Emission
Antenna	1, 2	1, 2
Channel	11	2
Operating Frequency (MHz)	2462	5935
Data Rate (Mbps)	1	6
Mode	b	a

**Table 2-12. Config-6 (ANT1 MIMO & ANT2 MIMO)**

## 2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	Antenna Gain (dBi)	MIMO Gain (dBi)
5.20	0.60	2.30	4.50
5.30	0.50	2.90	4.79
5.50	3.30	2.90	6.11
5.80	3.60	2.40	6.03

**Table 2-13. Antenna Peak Gain**

## 2.4 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

## 2.5 Software and Firmware

The test was conducted with software/firmware version 1.426.0 installed on the EUT.

## 2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 8 of 284



## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 9 of 284

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01 v01r01.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 10 of 284

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 11 of 284

V9.0 02/01/2019

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 12 of 284

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	12/19/2021	Annual	12/19/2022	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	12/19/2022	Annual	12/19/2022	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	12/19/2022	Annual	12/19/2022	WL40-1
-	ETS-001	EMC Cable and Switch System	12/9/2021	Annual	12/9/2022	ETS-001
-	ETS-002	EMC Cable and Switch System	3/10/2022	Annual	3/10/2023	ETS-002
-	AP1-002	EMC Cable and Switch System	3/9/2022	Annual	3/9/2023	AP1-002
-	AP2-001	EMC Cable and Switch System	1/4/2022	Annual	1/4/2023	AP2-001
-	AP2-002	EMC Cable and Switch System	3/11/2022	Annual	3/11/2023	AP2-002
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Agilent	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/21/2022	MY49430494
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2022	9203-2178
ETS-Lindgren	3117	Horn Antenna (1 - 18GHz)	4/20/2021	Biennial	4/20/2023	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	7/9/2020	Biennial	7/9/2022	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	2/14/2022	Annual	2/14/2023	MY54490576
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-44GHz)	2/14/2022	Annual	2/14/2023	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	12/19/2021	Annual	12/19/2022	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/25/2021	Annual	7/25/2022	100348
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 13 of 284

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Microsoft Corporation  
 FCC ID: C3K1997  
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “UNII Automation,” Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 1.3.1.

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 14 of 284

## 7.2 26dB Bandwidth Measurement – 802.11a/n/ac/ax

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

***The 26dB bandwidth is used to determine the conducted power limits.***

### Test Procedure Used

ANSI C63.10-2013 – Section 12.4  
KDB 789033 D02 v02r01 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 15 of 284

V9.0 02/01/2019


## SISO Antenna-1 26 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	19.18
	5200	40	a	6	18.94
	5240	48	a	6	18.80
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.24
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.00
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	20.34
	5180	36	ax (20MHz)	6.5/7.2 (MCS0)	20.61
	5200	40	ax (20MHz)	6.5/7.2 (MCS0)	21.16
	5240	48	ax (20MHz)	6.5/7.2 (MCS0)	20.84
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.39
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.44
	5190	38	ax (40MHz)	13.5/15 (MCS0)	40.14
	5230	46	ax (40MHz)	13.5/15 (MCS0)	40.03
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.57
5210	42	ax (80MHz)	29.3/32.5 (MCS0)	81.08	
Band 1/2A	5250	50	ac (160MHz)	58.5/65 (MCS0)	163.30
	5250	50	ac (160MHz)	58.5/65 (MCS0)	166.90
Band 2A	5260	52	a	6	34.12
	5280	56	a	6	35.91
	5320	64	a	6	35.93
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	36.80
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	33.46
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	36.72
	5260	52	ax (20MHz)	6.5/7.2 (MCS0)	40.22
	5280	56	ax (20MHz)	6.5/7.2 (MCS0)	36.69
	5320	64	ax (20MHz)	6.5/7.2 (MCS0)	35.61
	5270	54	n (40MHz)	13.5/15 (MCS0)	43.37
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.21
	5270	54	ax (40MHz)	13.5/15 (MCS0)	43.04
	5310	62	ax (40MHz)	13.5/15 (MCS0)	40.23
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	80.38
	5290	58	ax (80MHz)	29.3/32.5 (MCS0)	81.75
	Band 2C	5500	100	a	6
5600		120	a	6	32.91
5720		144	a	6	32.76
5500		100	n (20MHz)	6.5/7.2 (MCS0)	35.06
5600		120	n (20MHz)	6.5/7.2 (MCS0)	32.36
5720		144	n (20MHz)	6.5/7.2 (MCS0)	31.71
5500		100	ax (20MHz)	6.5/7.2 (MCS0)	36.13
5600		120	ax (20MHz)	6.5/7.2 (MCS0)	36.43
5720		144	ax (20MHz)	6.5/7.2 (MCS0)	34.32
5510		102	n (40MHz)	13.5/15 (MCS0)	39.41
5590		118	n (40MHz)	13.5/15 (MCS0)	41.65
5710		142	n (40MHz)	13.5/15 (MCS0)	48.60
5510		102	ax (40MHz)	13.5/15 (MCS0)	40.51
5590		118	ax (40MHz)	13.5/15 (MCS0)	41.71
5710		142	ax (40MHz)	13.5/15 (MCS0)	41.31
5530		106	ac (80MHz)	29.3/32.5 (MCS0)	82.16
5610		122	ac (80MHz)	29.3/32.5 (MCS0)	87.51
5690		138	ac (80MHz)	29.3/32.5 (MCS0)	85.22
5530		106	ax (80MHz)	29.3/32.5 (MCS0)	81.12
5610		122	ax (80MHz)	29.3/32.5 (MCS0)	83.14
5690	138	ax (80MHz)	29.3/32.5 (MCS0)	83.46	
5570	114	ac (160MHz)	58.5/65 (MCS0)	154.30	
5570	114	ac (160MHz)	58.5/65 (MCS0)	165.90	


Table 7-2. Conducted Bandwidth Measurements SISO ANT1

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 16 of 284



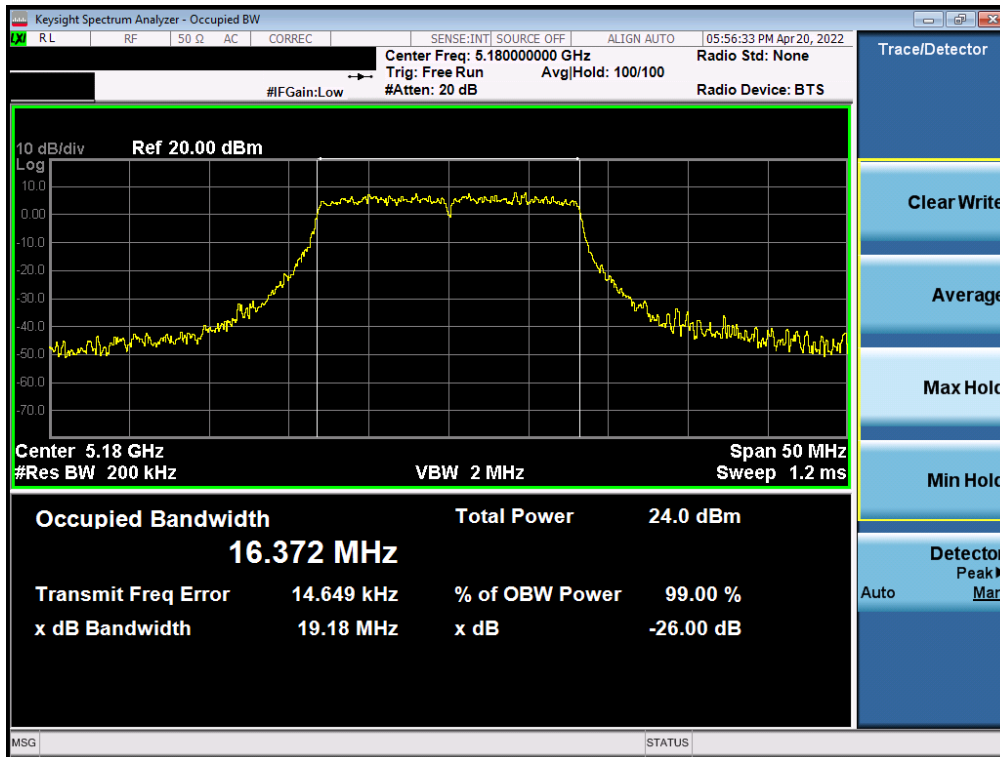


Plot 7-1. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 36)

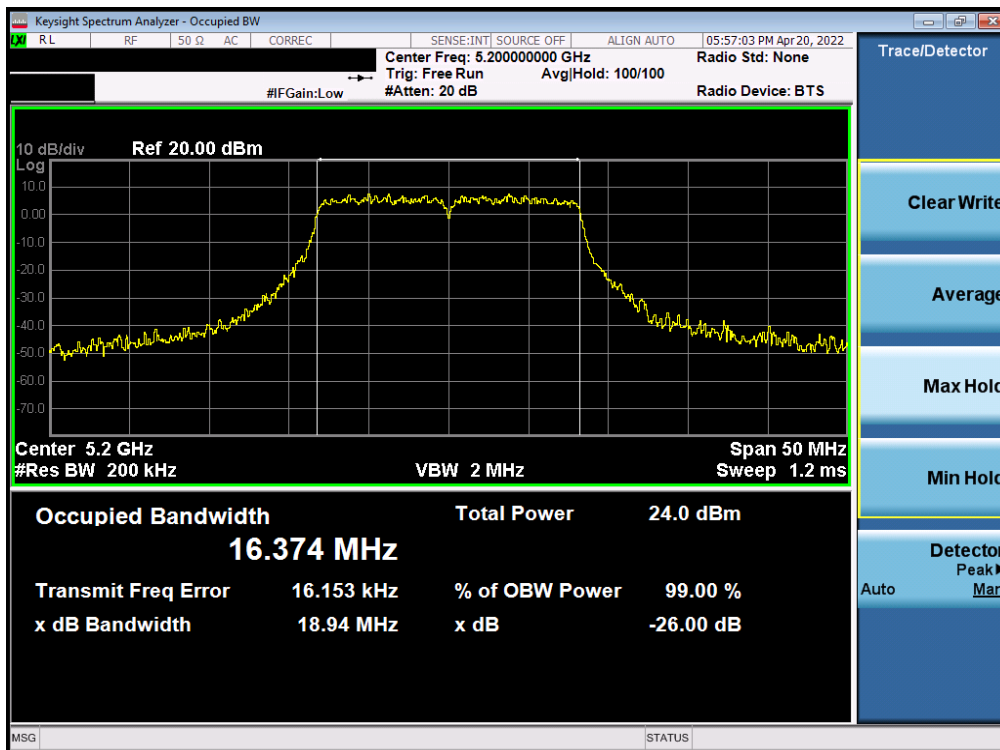


Plot 7-2. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 40)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 17 of 284

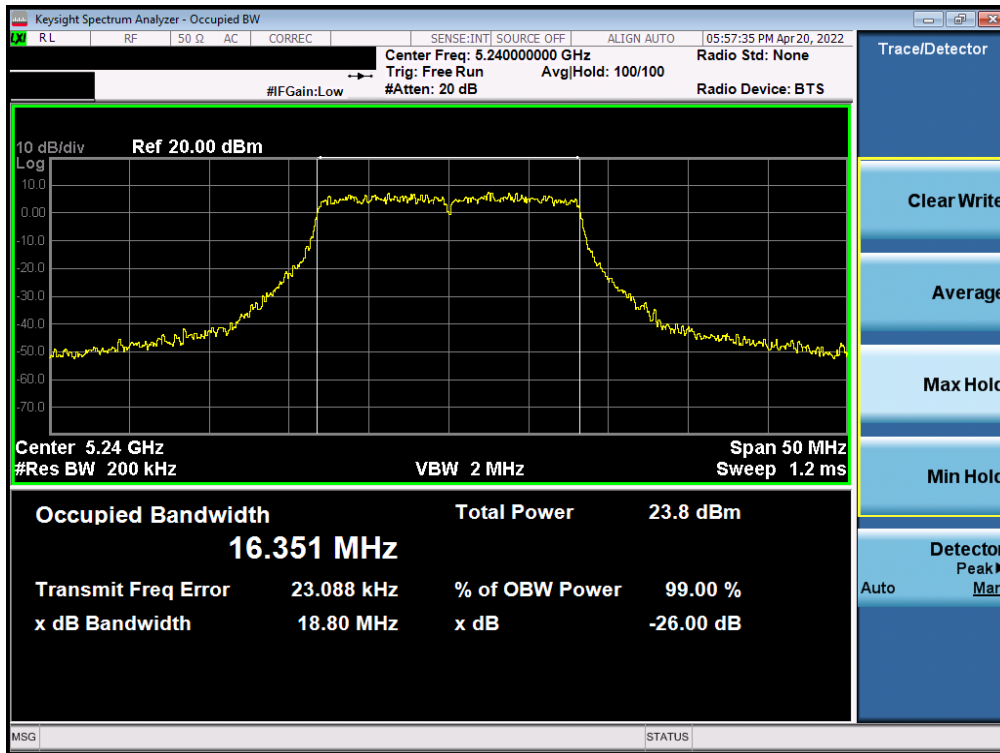


Plot 7-3. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 48)

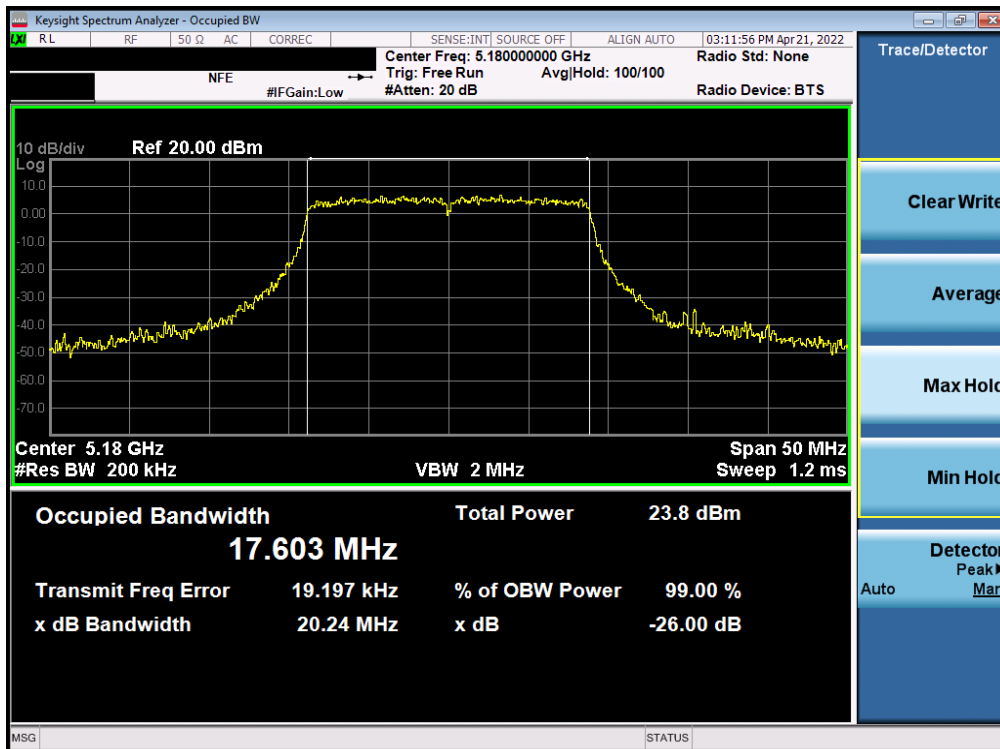


Plot 7-4. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 18 of 284

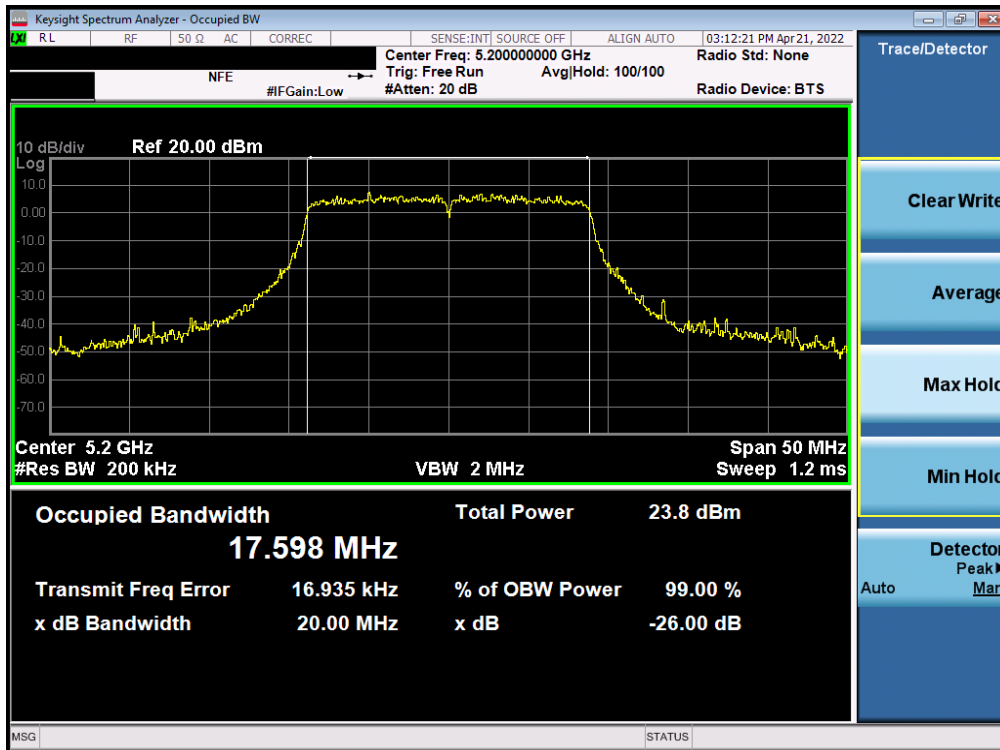


Plot 7-5. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

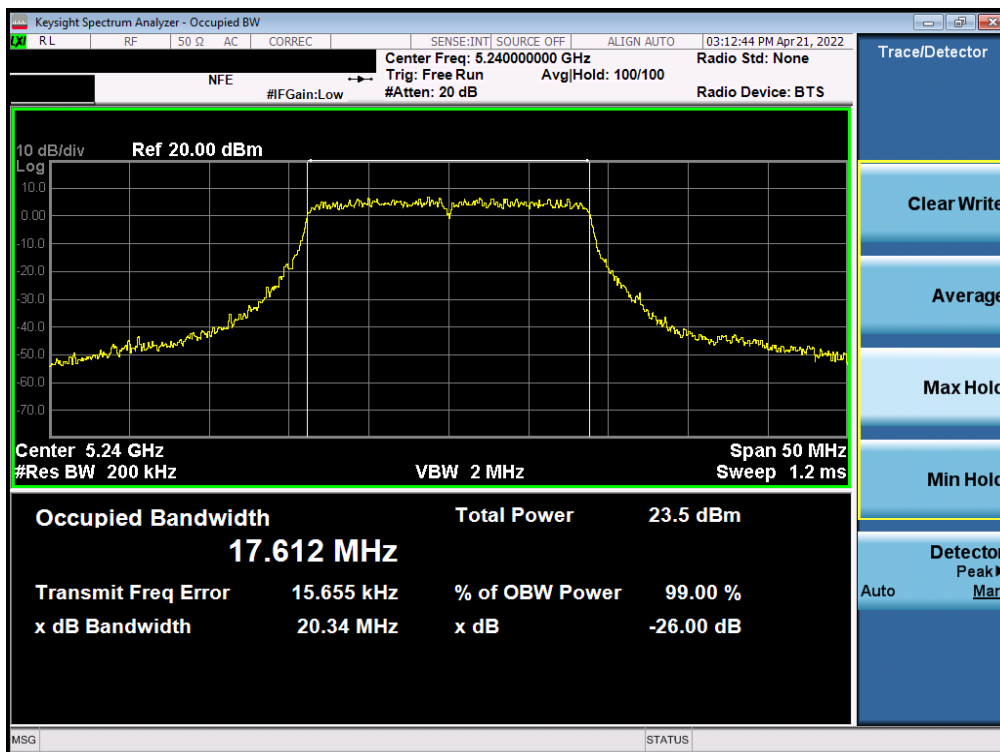


Plot 7-6. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 19 of 284

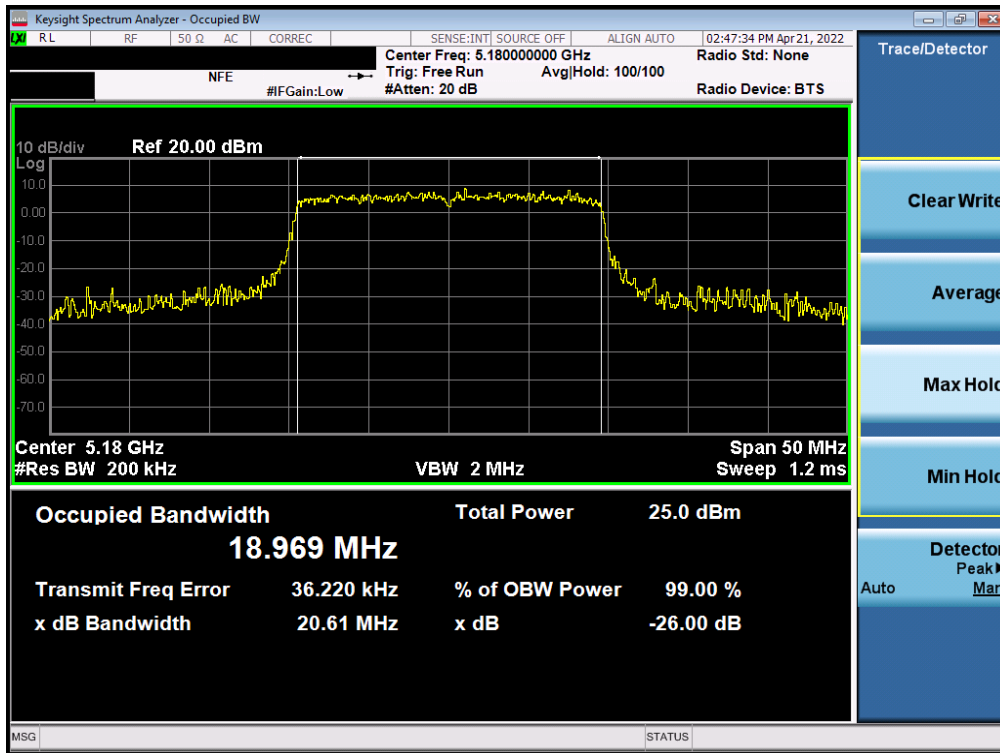


Plot 7-7. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 36)

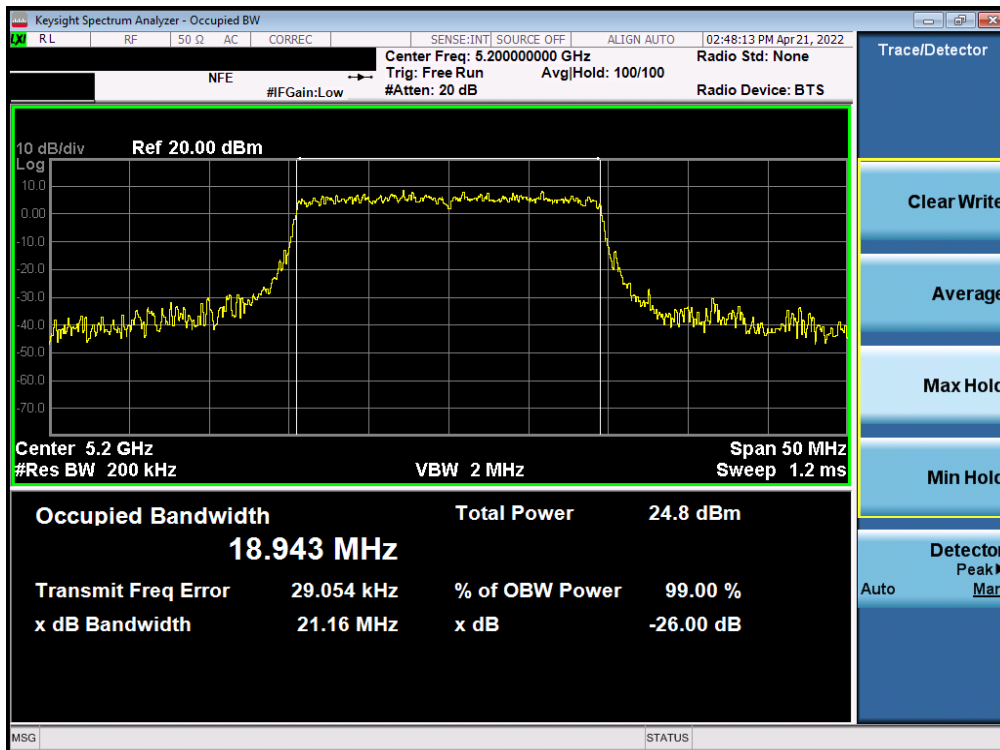


Plot 7-8. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 40)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 20 of 284

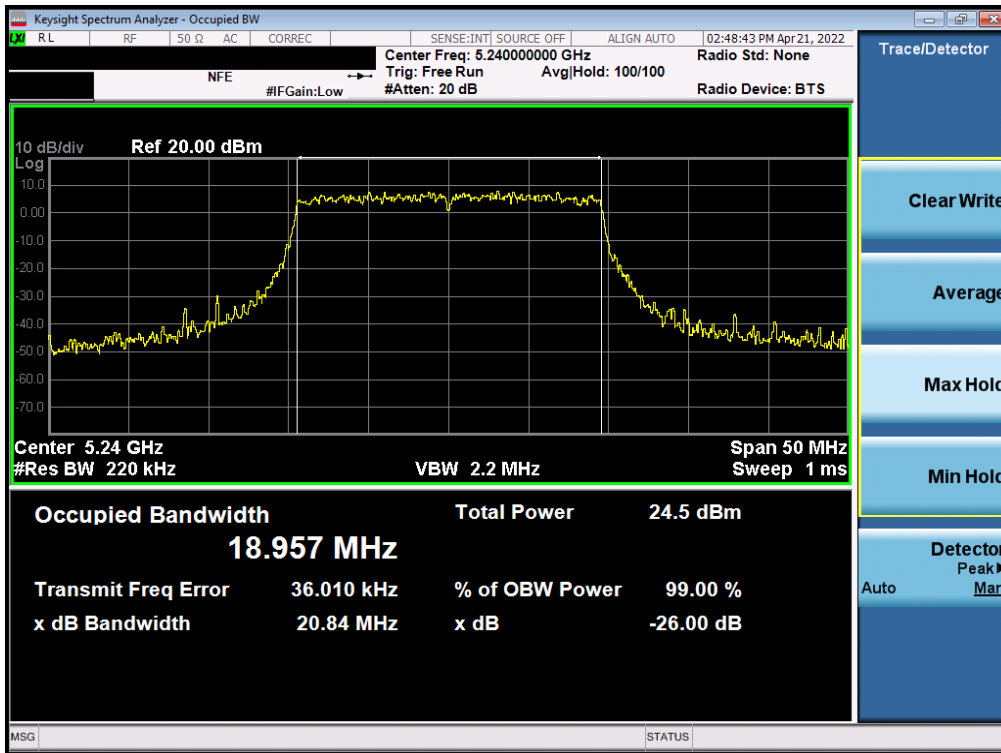


Plot 7-9. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 1) – Ch. 48)

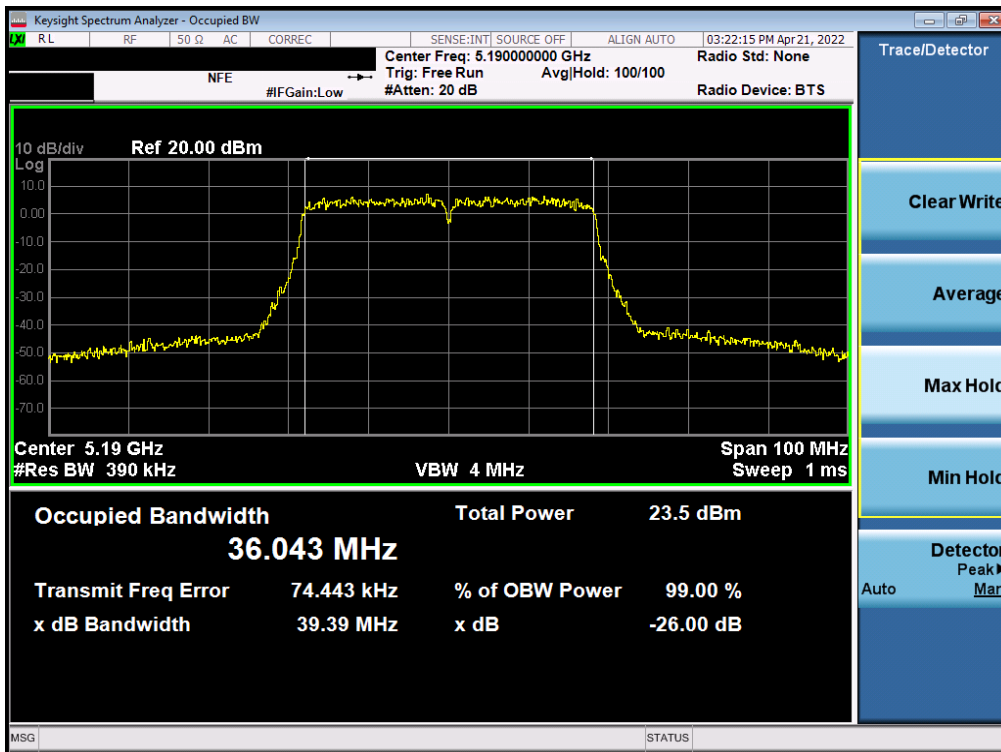


Plot 7-10. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 21 of 284

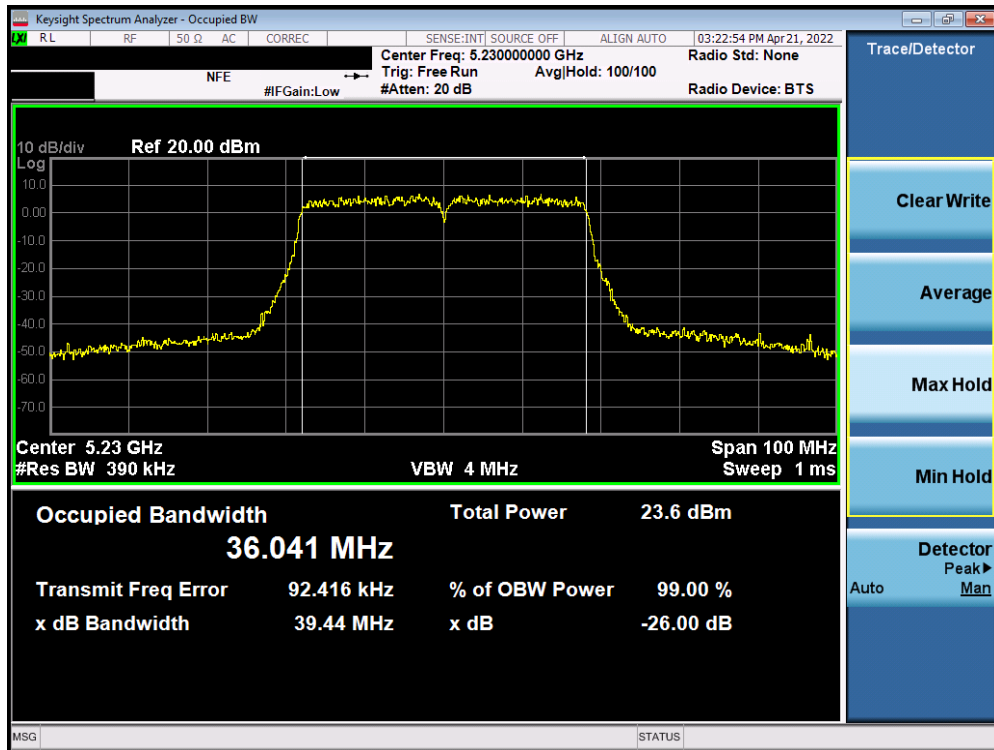


Plot 7-11. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

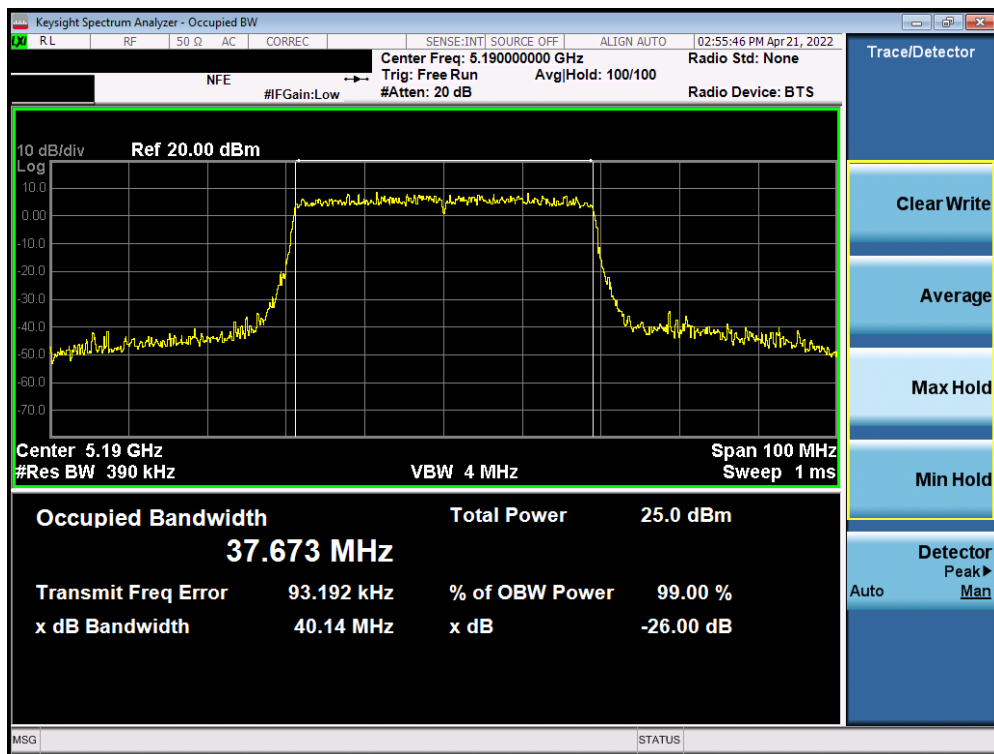


Plot 7-12. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 1) – Ch. 38)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1-C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 22 of 284

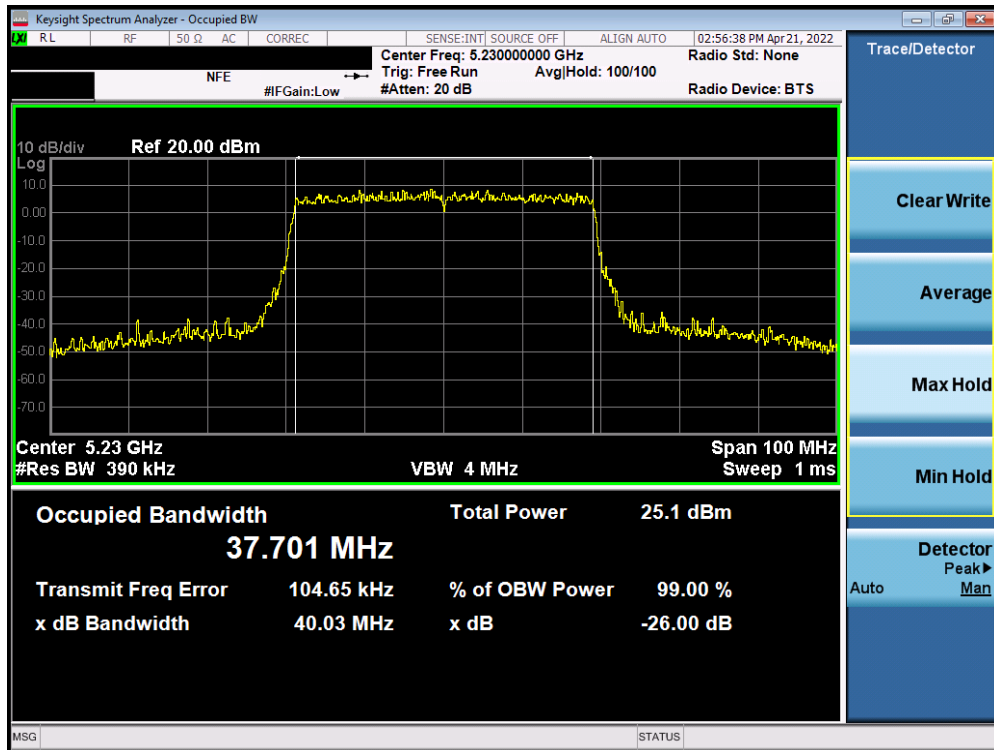


Plot 7-13. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 1) – Ch. 46)

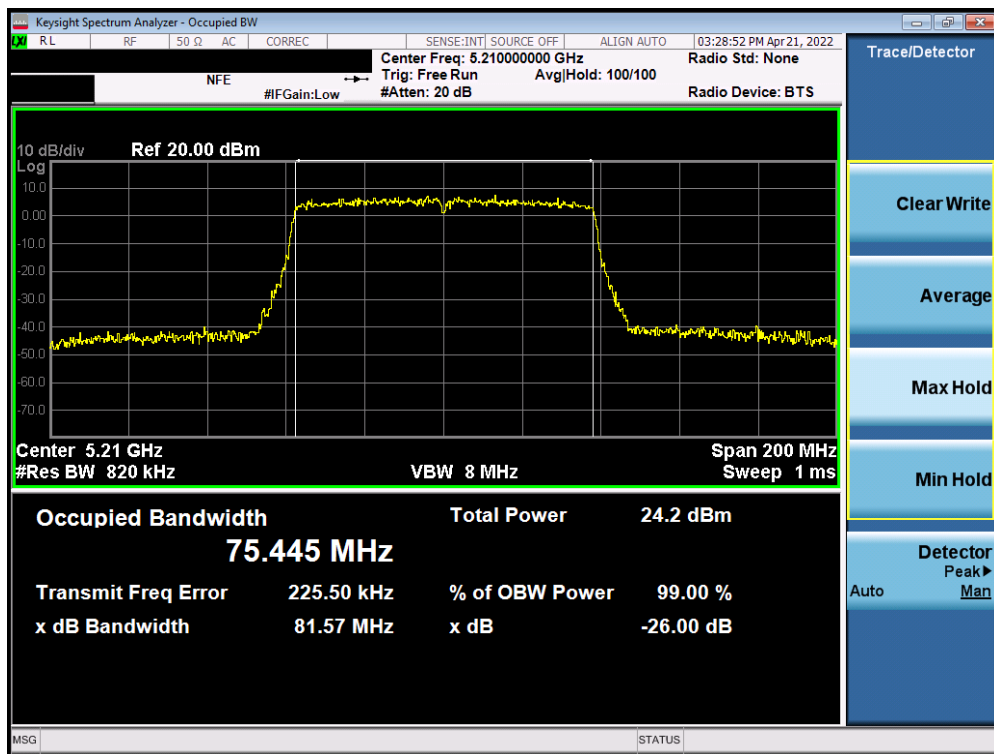


Plot 7-14. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1-C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 23 of 284

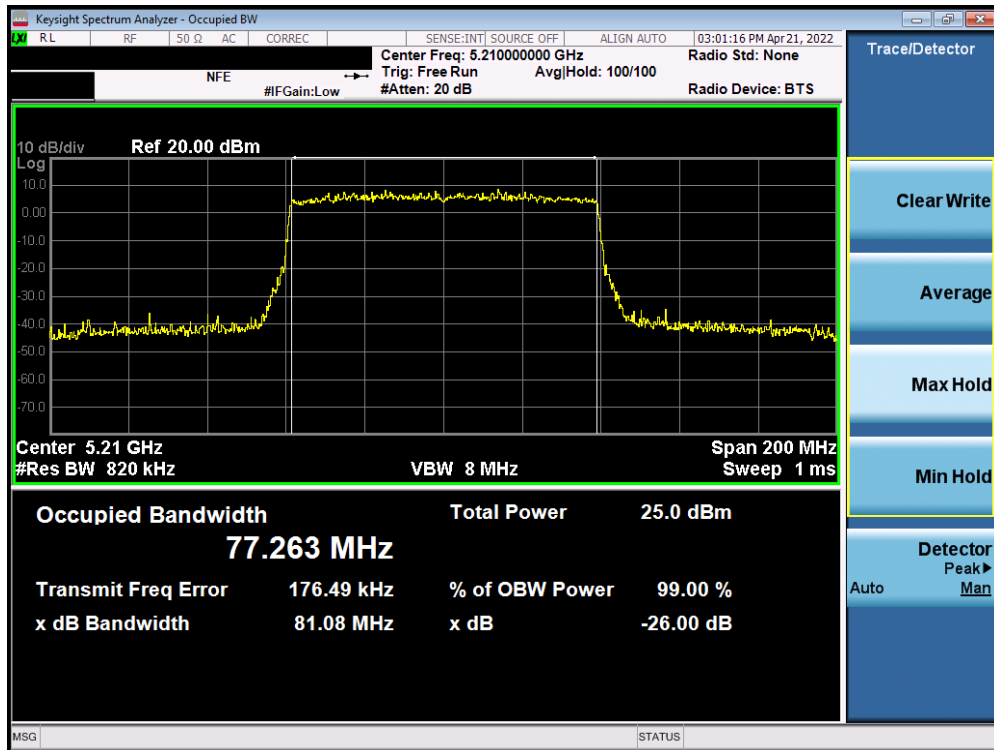


Plot 7-15. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

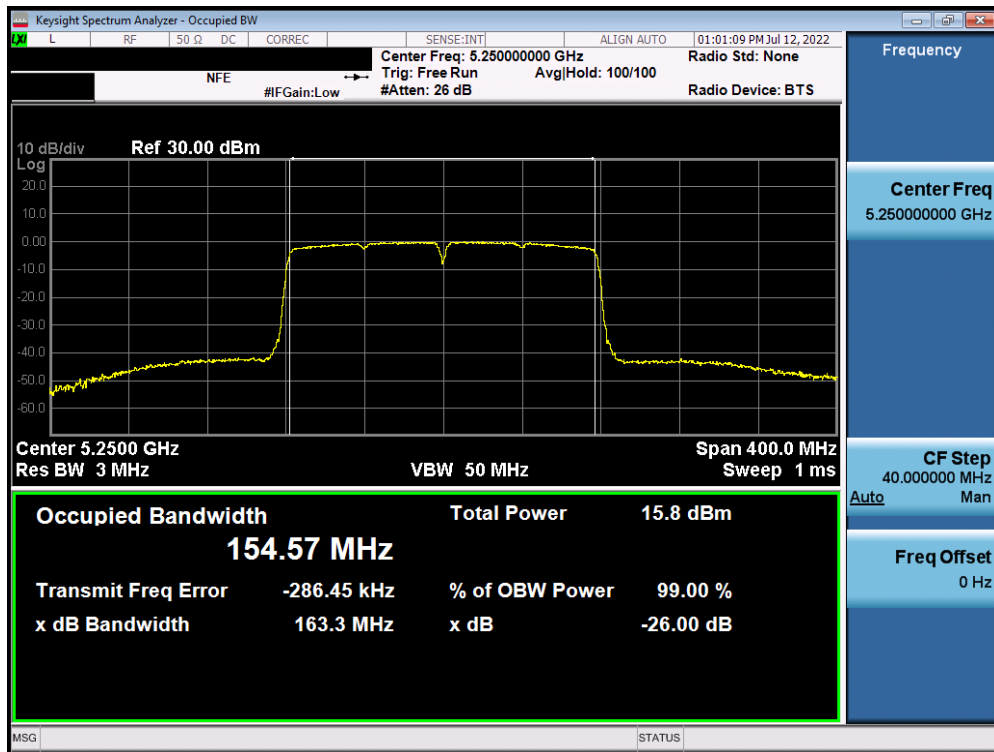


Plot 7-16. 26dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ac (UNII Band 1/2A) – Ch. 50)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1-C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 24 of 284



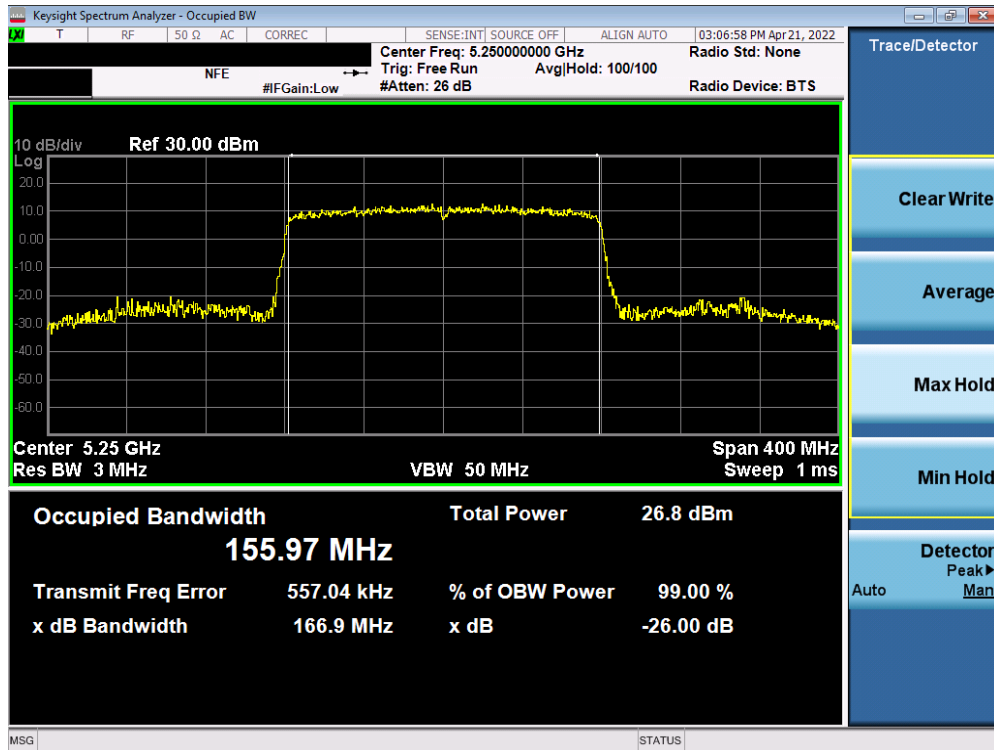


Plot 7-17. 26dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ax (UNII Band 1/2A) – Ch. 50)

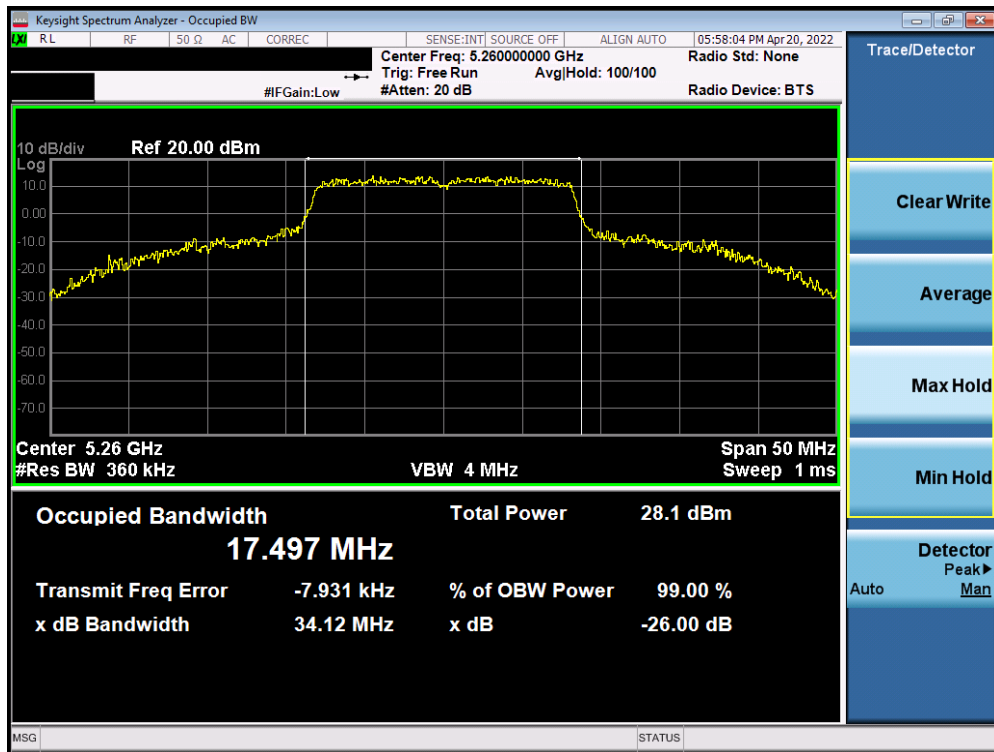


Plot 7-18. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: C3K1997		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 25 of 284	

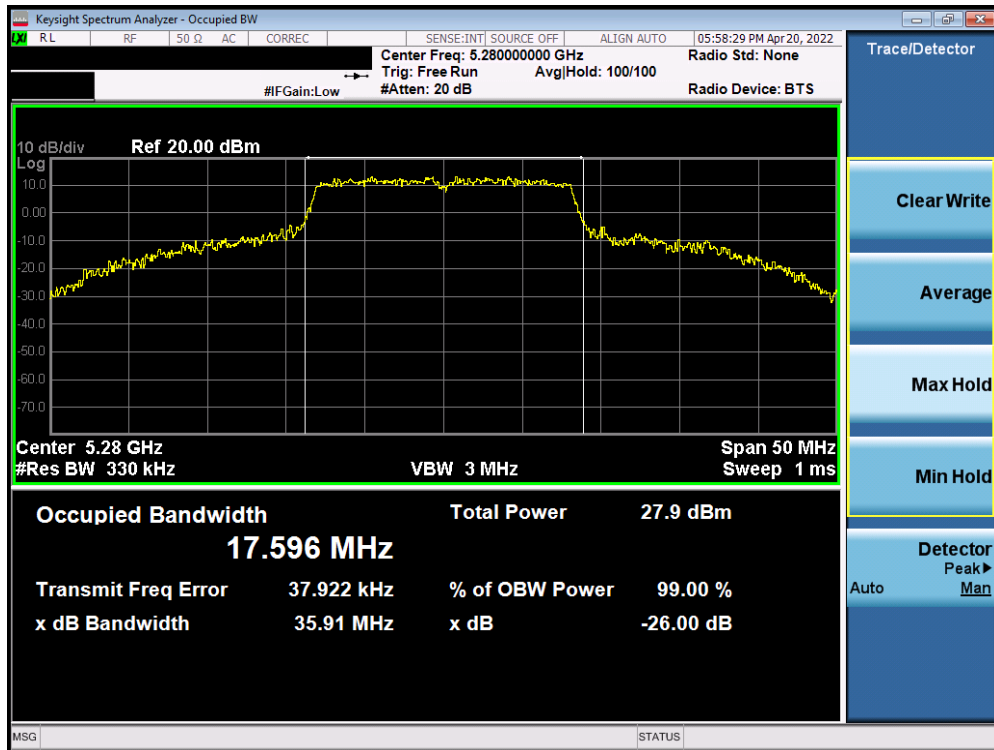


Plot 7-19. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 56)

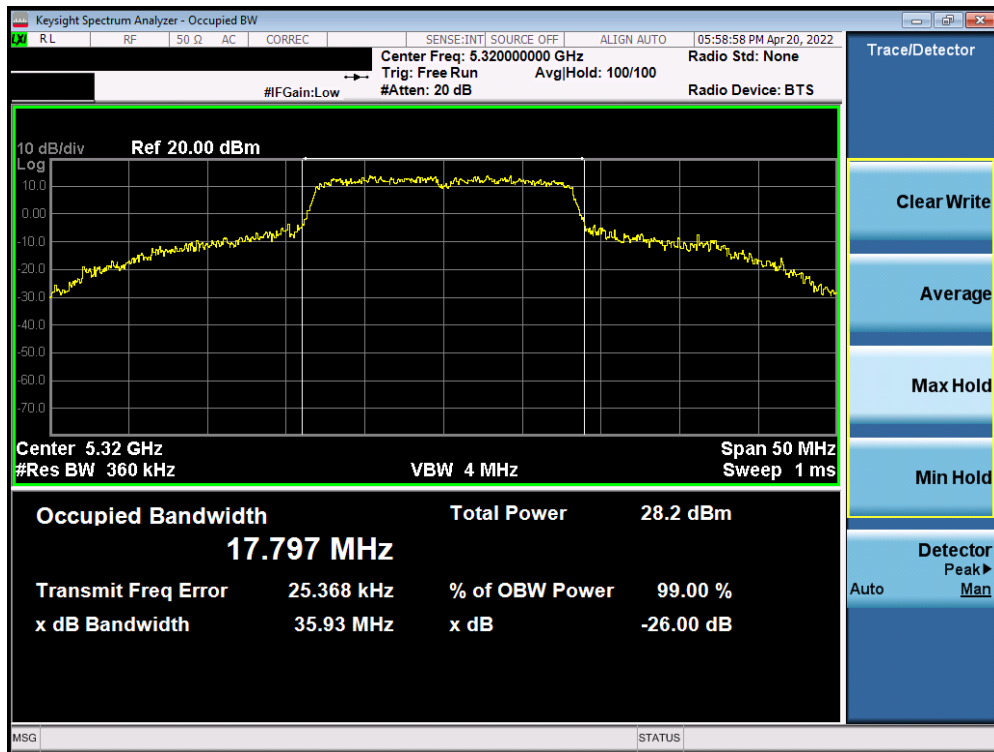


Plot 7-20. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 26 of 284

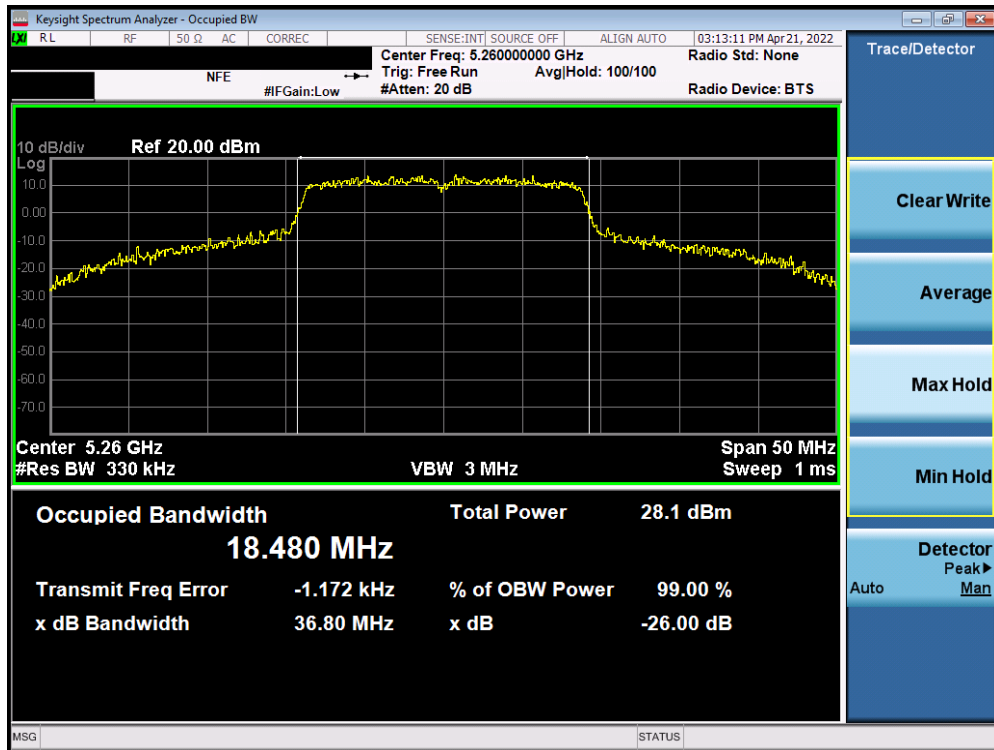


Plot 7-21. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

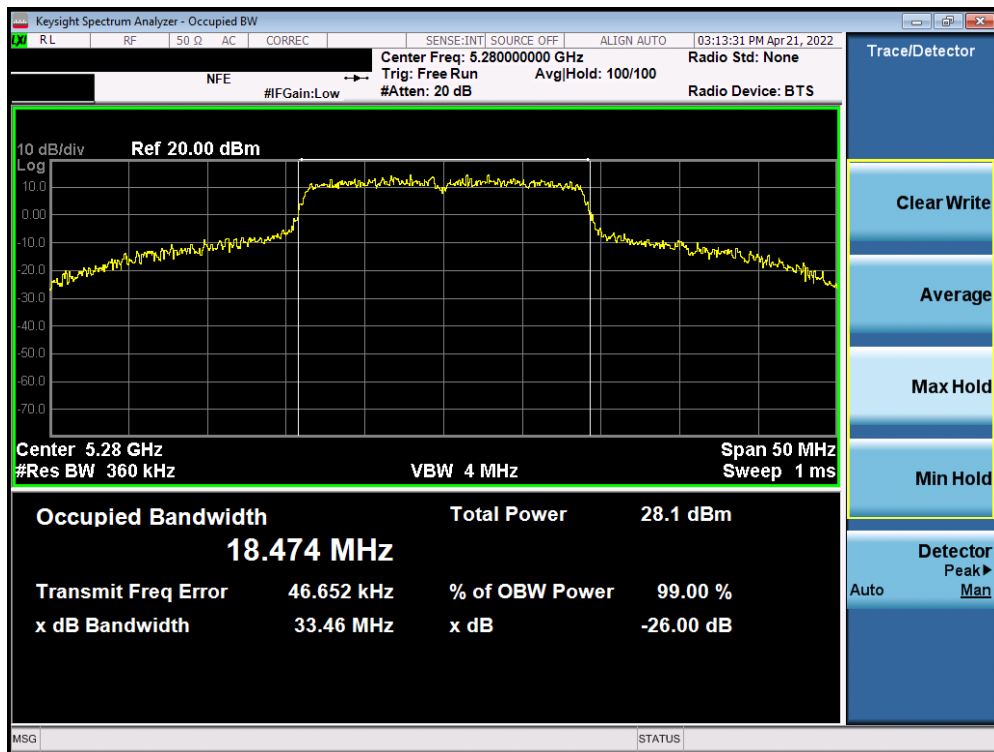


Plot 7-22. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 27 of 284

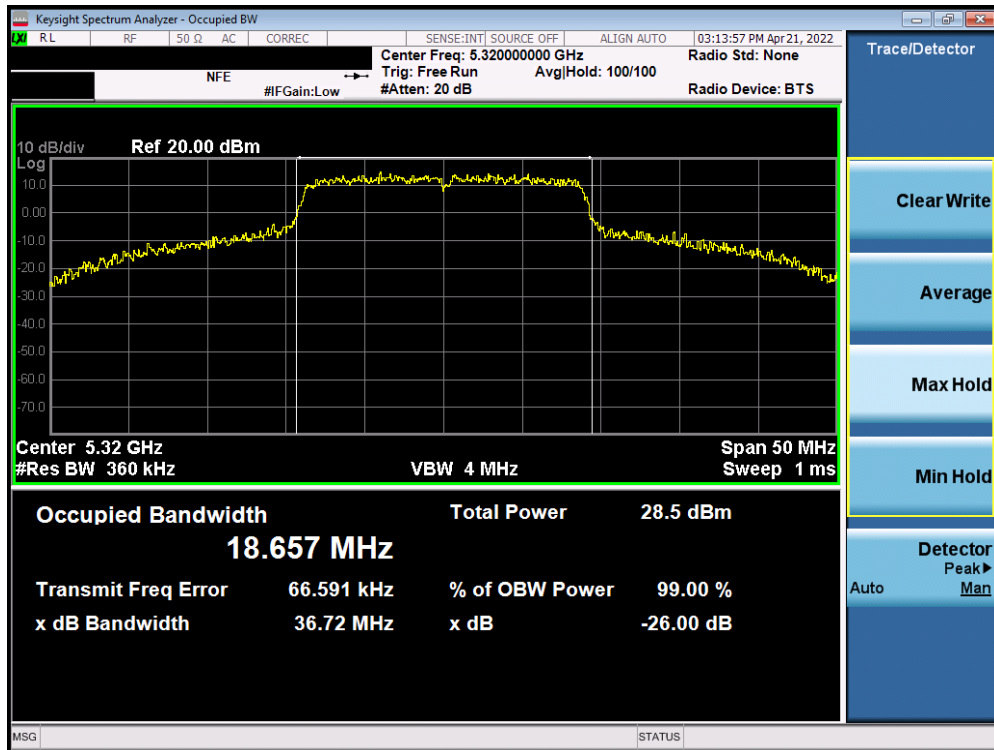


Plot 7-23. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

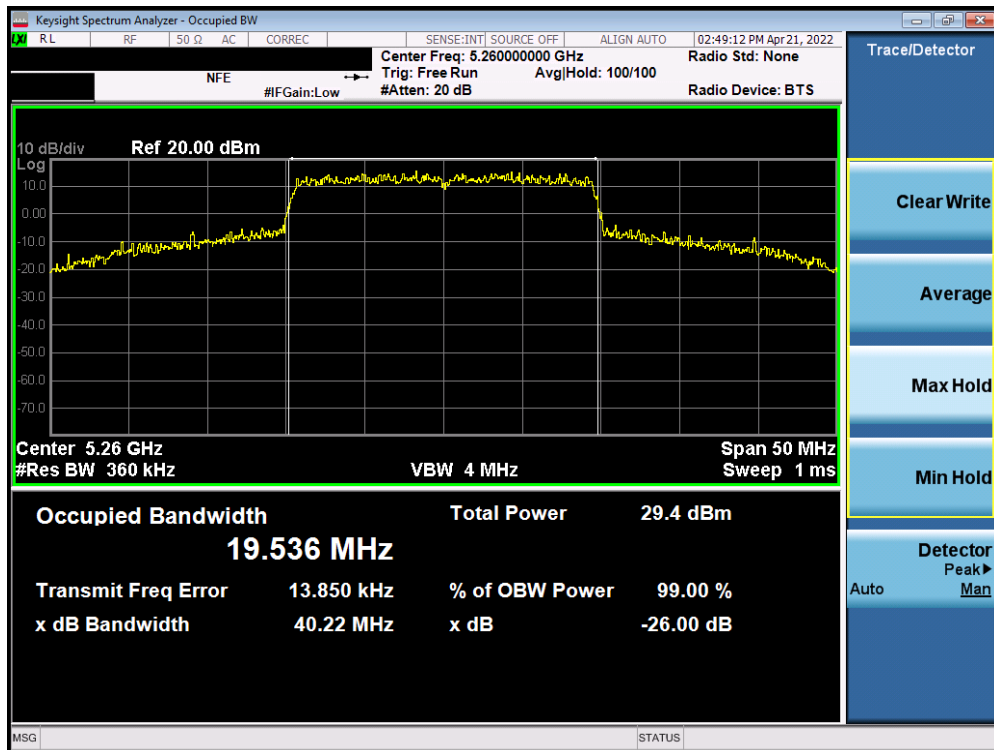


Plot 7-24. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 52)

FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1-C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 28 of 284

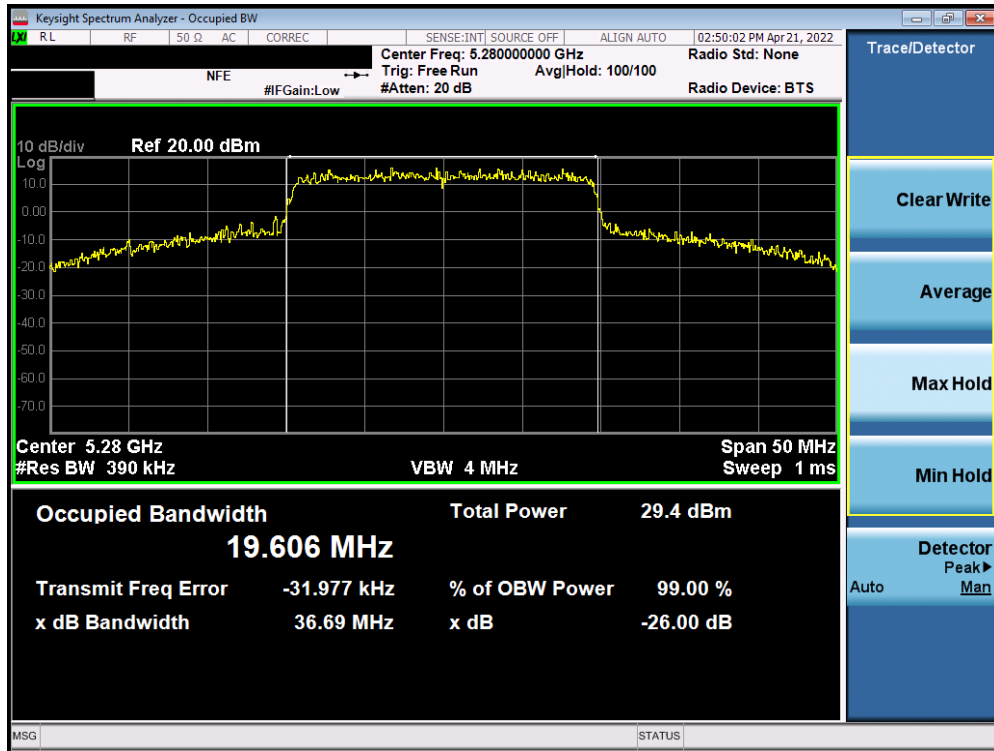


Plot 7-25. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 56)

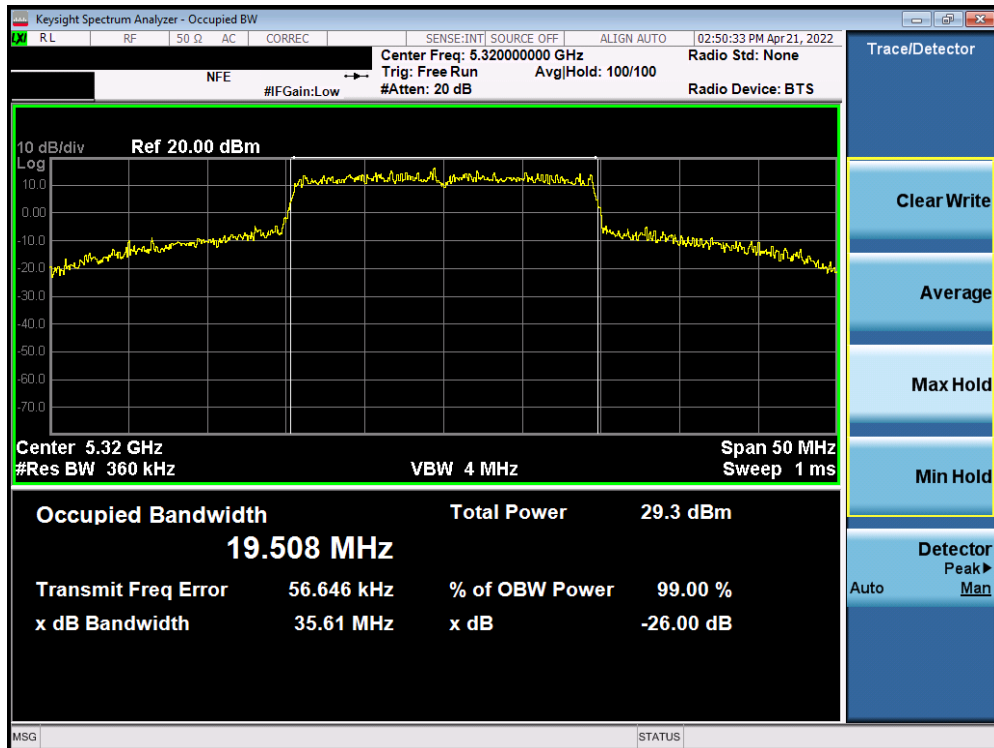


Plot 7-26. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 64)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 29 of 284

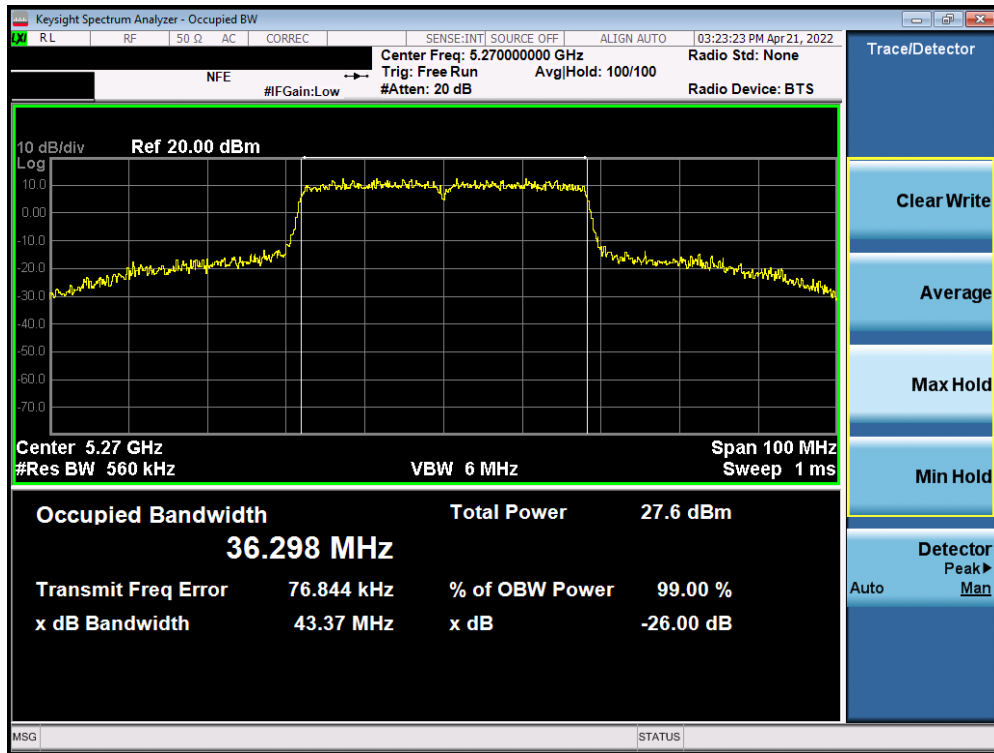


Plot 7-27. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

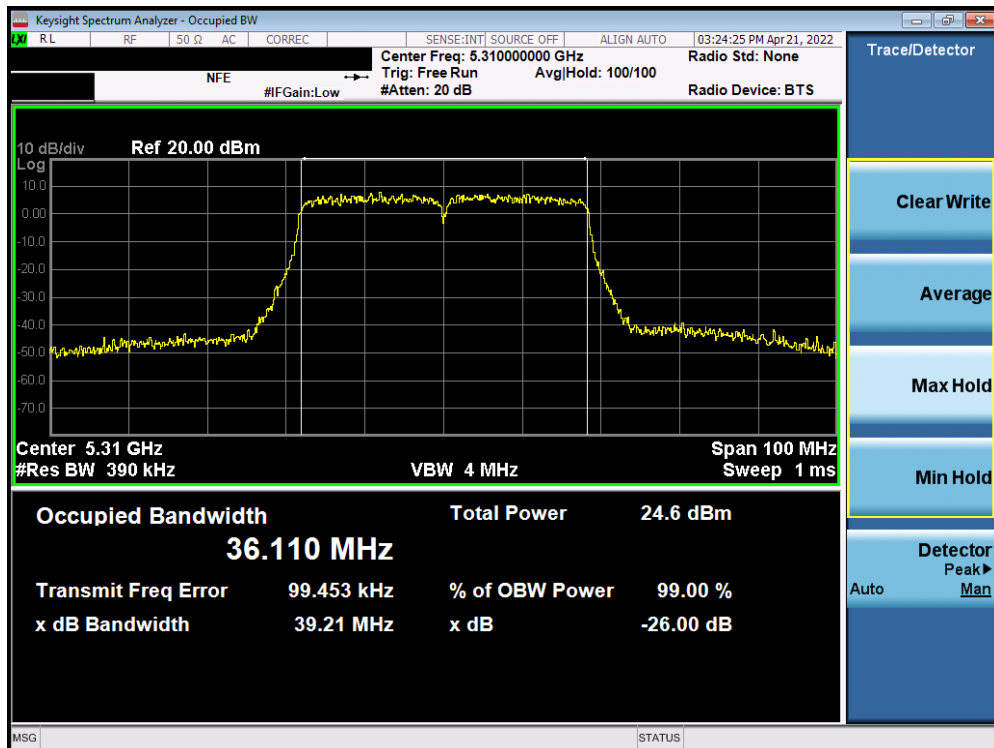


Plot 7-28. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 30 of 284

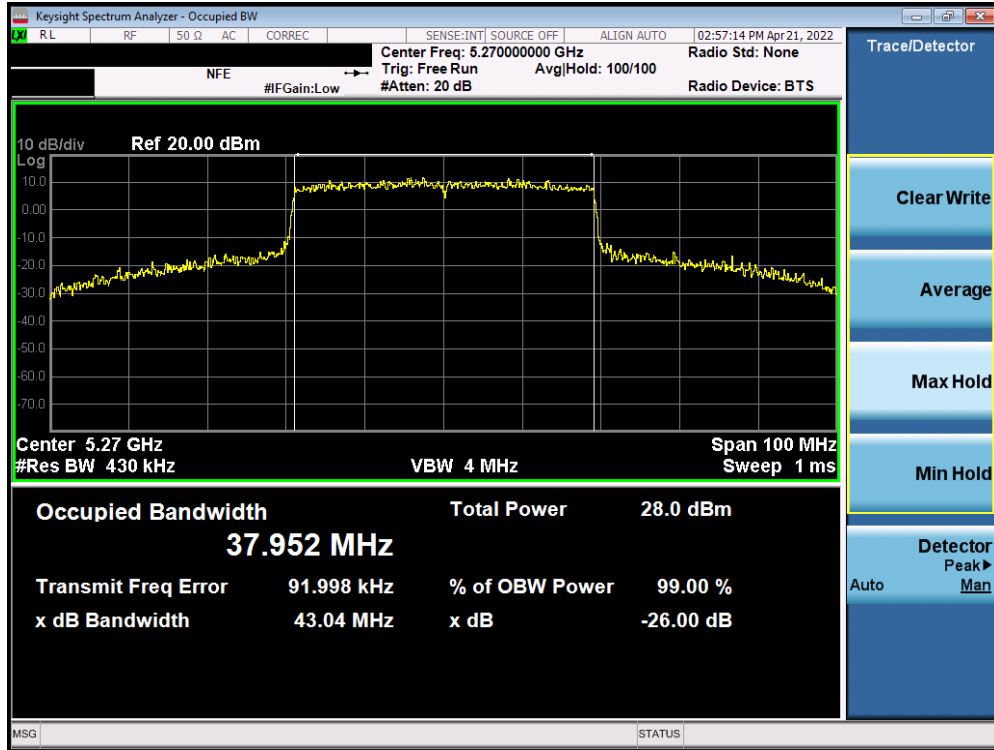


Plot 7-29. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 54)

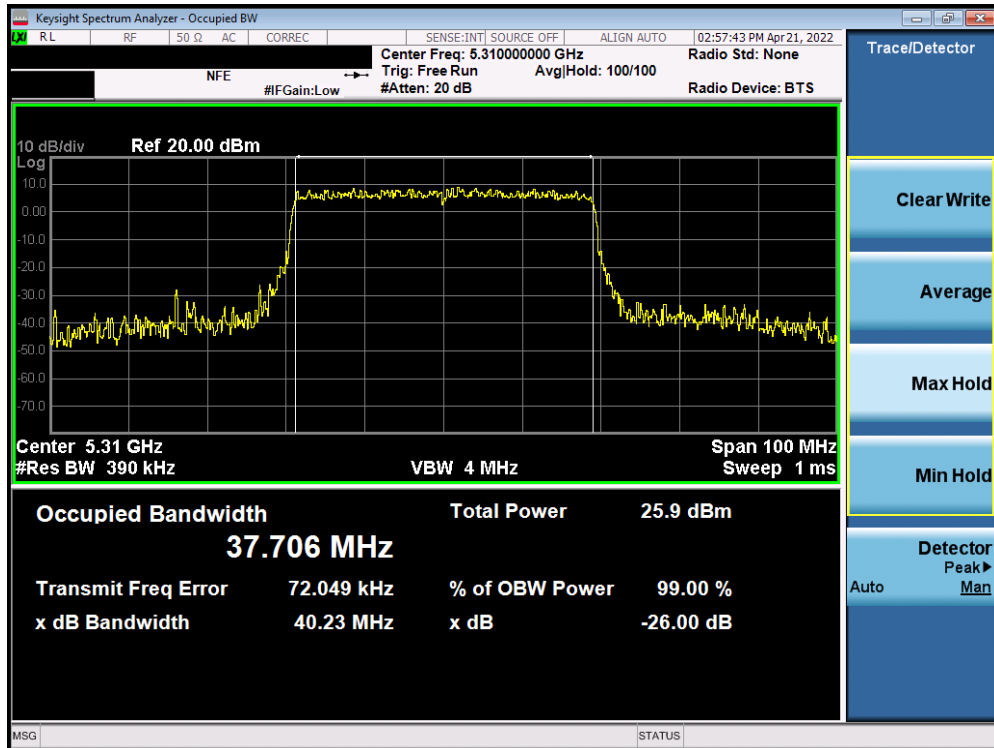


Plot 7-30. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 62)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 31 of 284

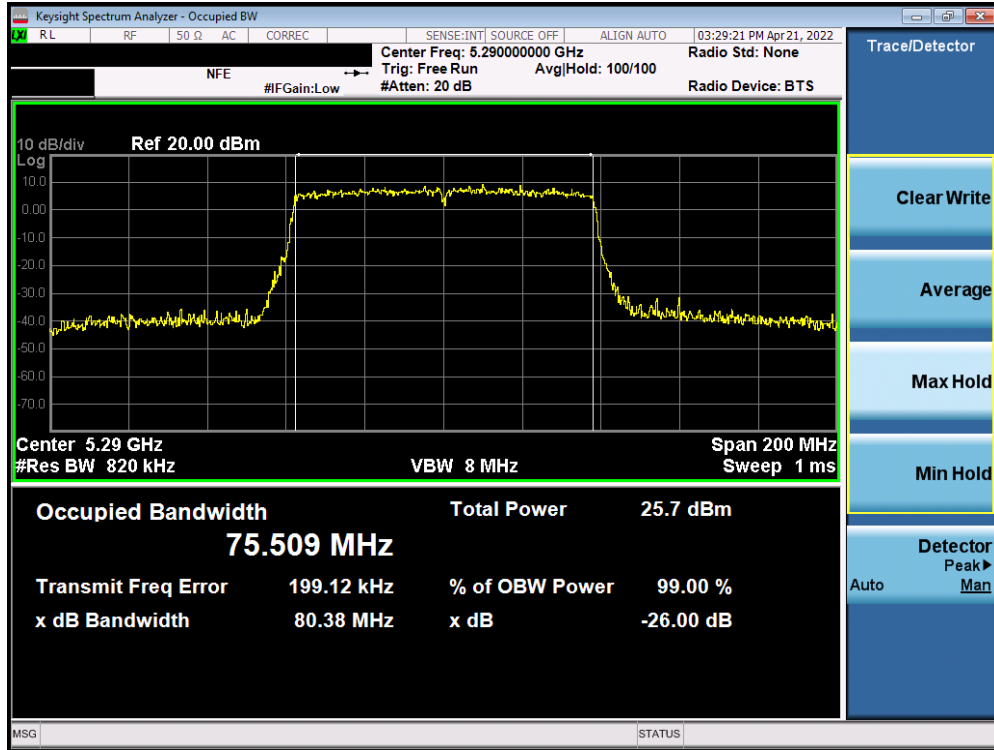


Plot 7-31. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

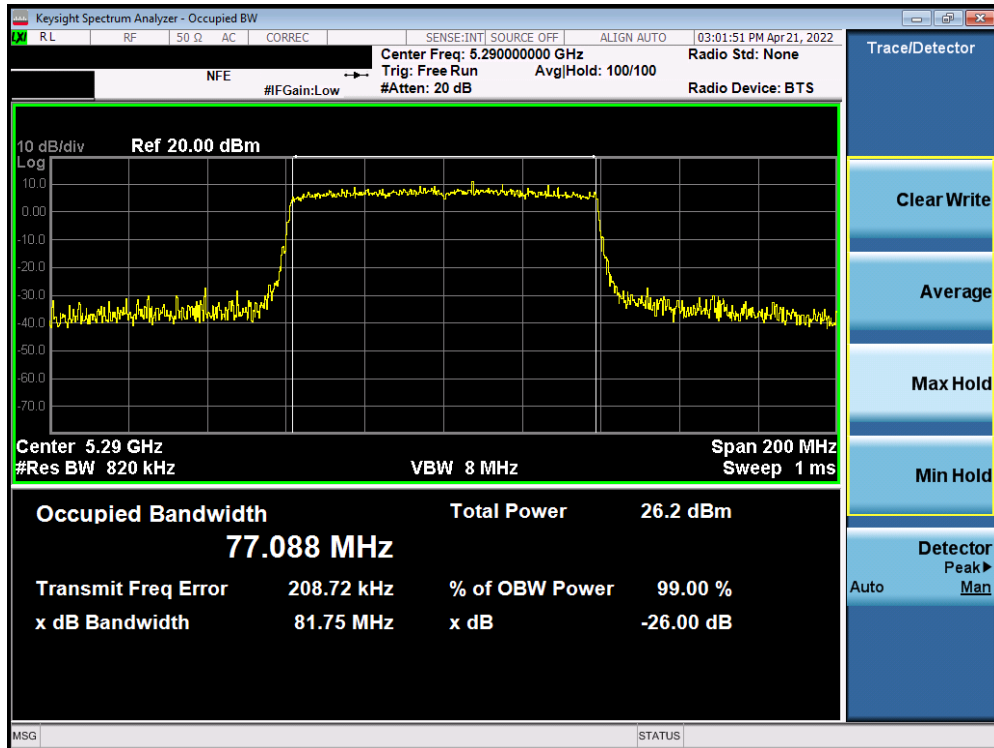


Plot 7-32. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 58)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 32 of 284



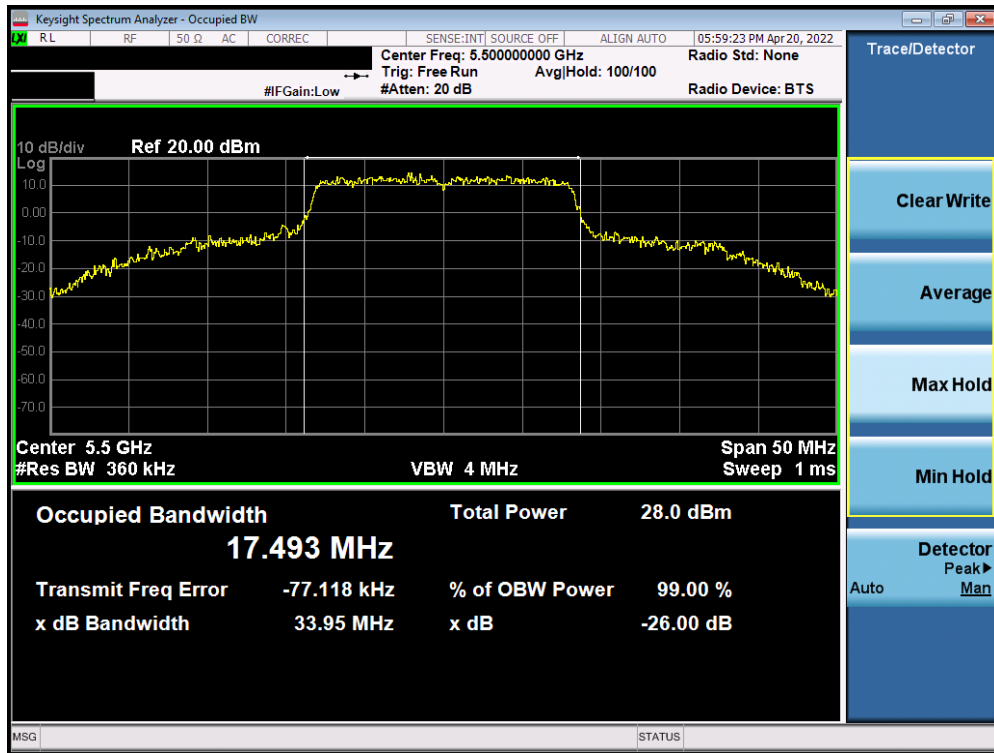


Plot 7-33. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 100)

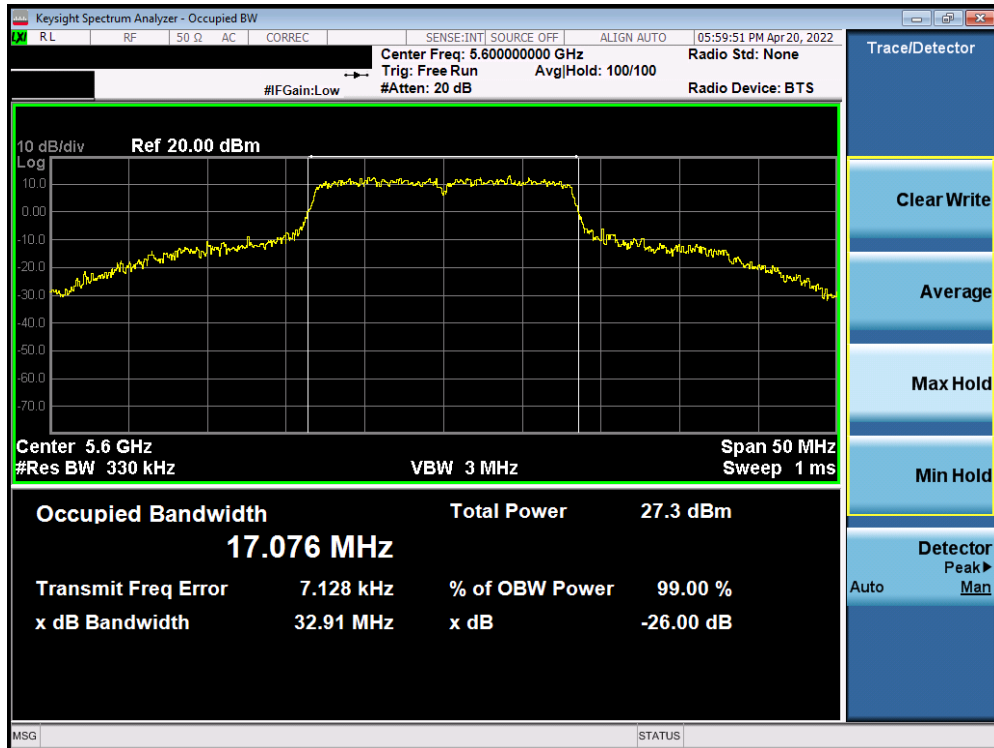


Plot 7-34. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 33 of 284

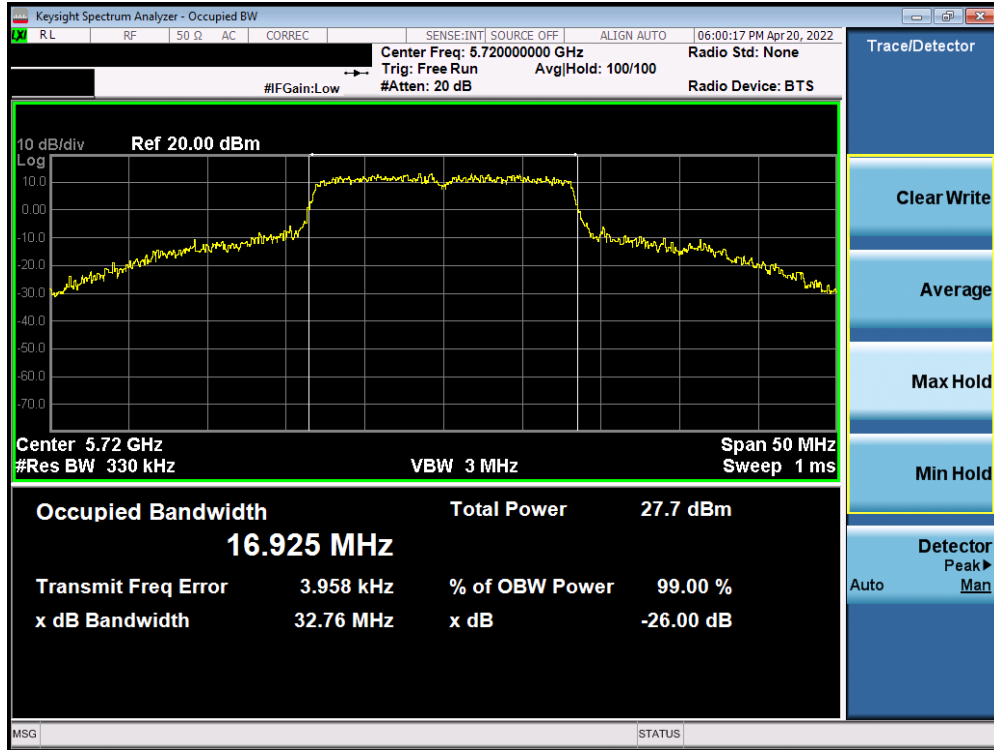


Plot 7-35. 26dB Bandwidth Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 140)

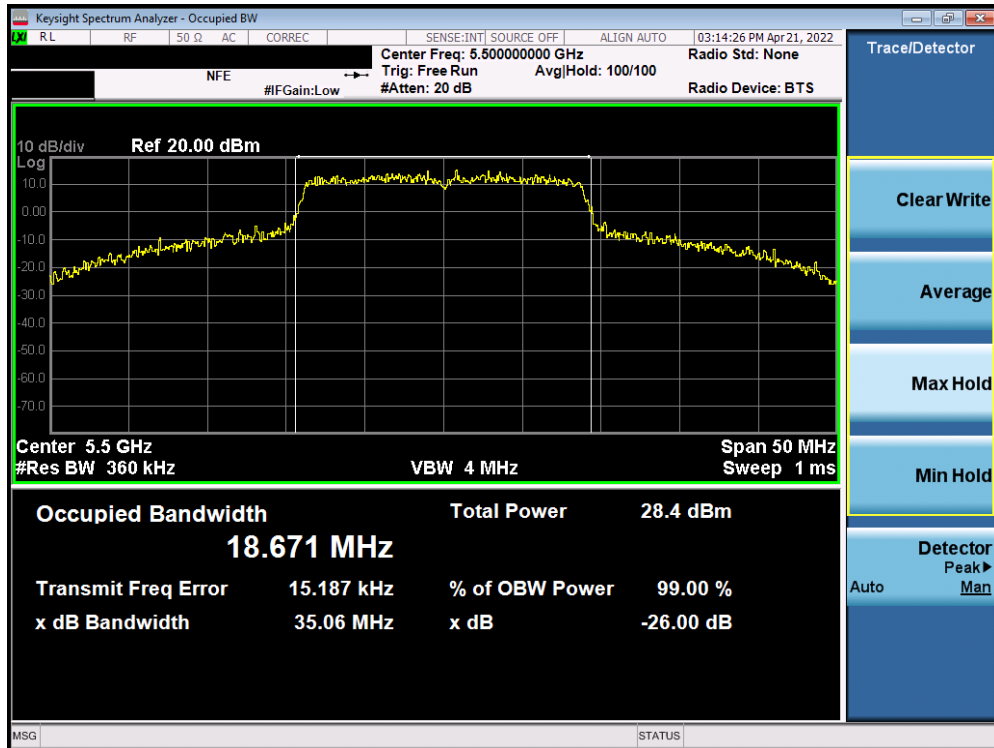


Plot 7-36. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 34 of 284

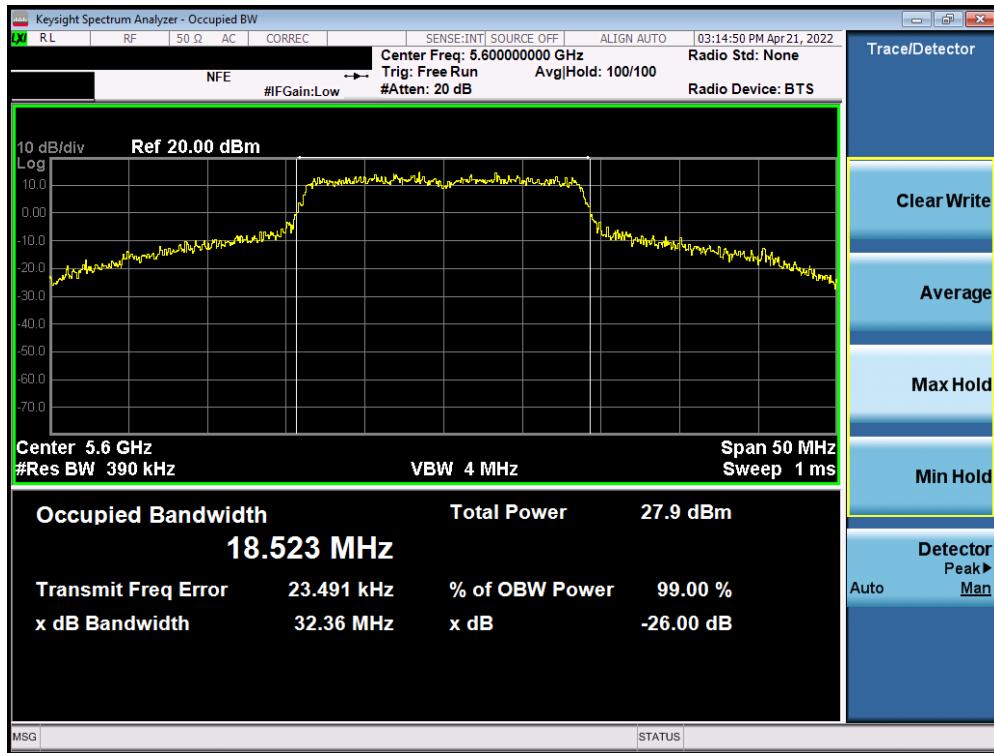


Plot 7-37. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

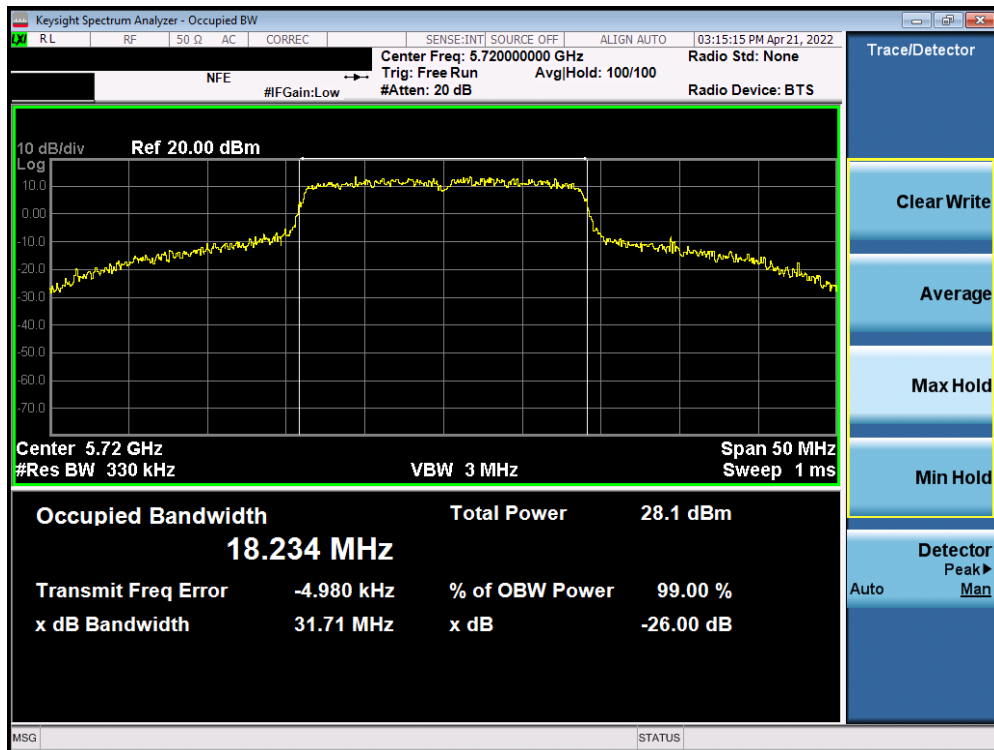


Plot 7-38. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

FCC ID: C3K1997		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 35 of 284	

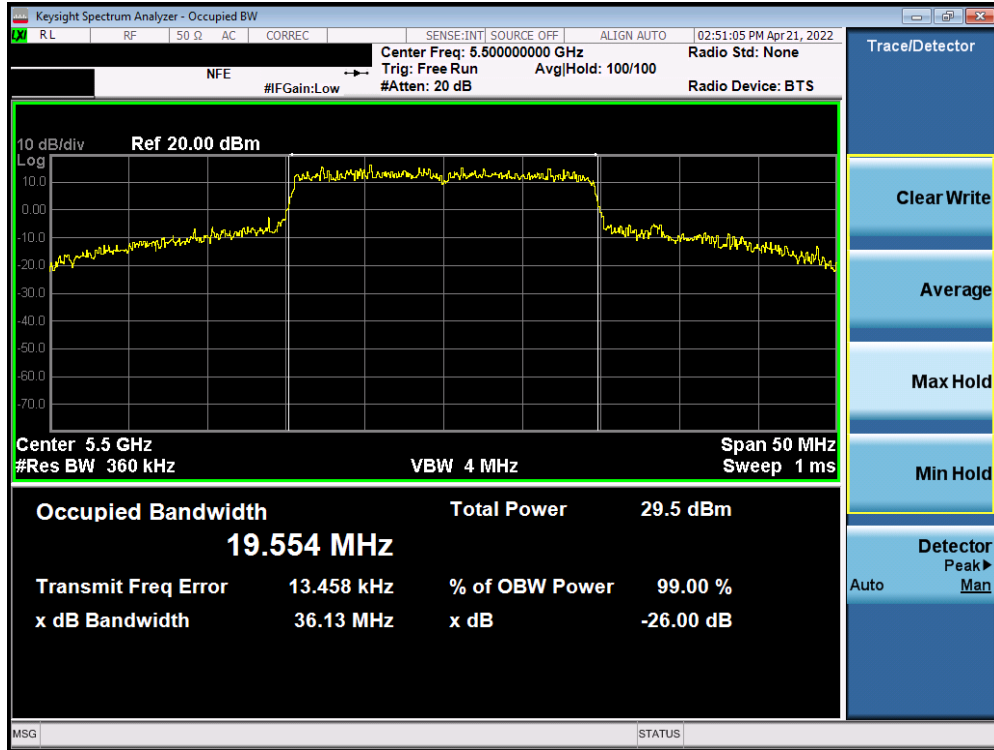


Plot 7-39. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 100)

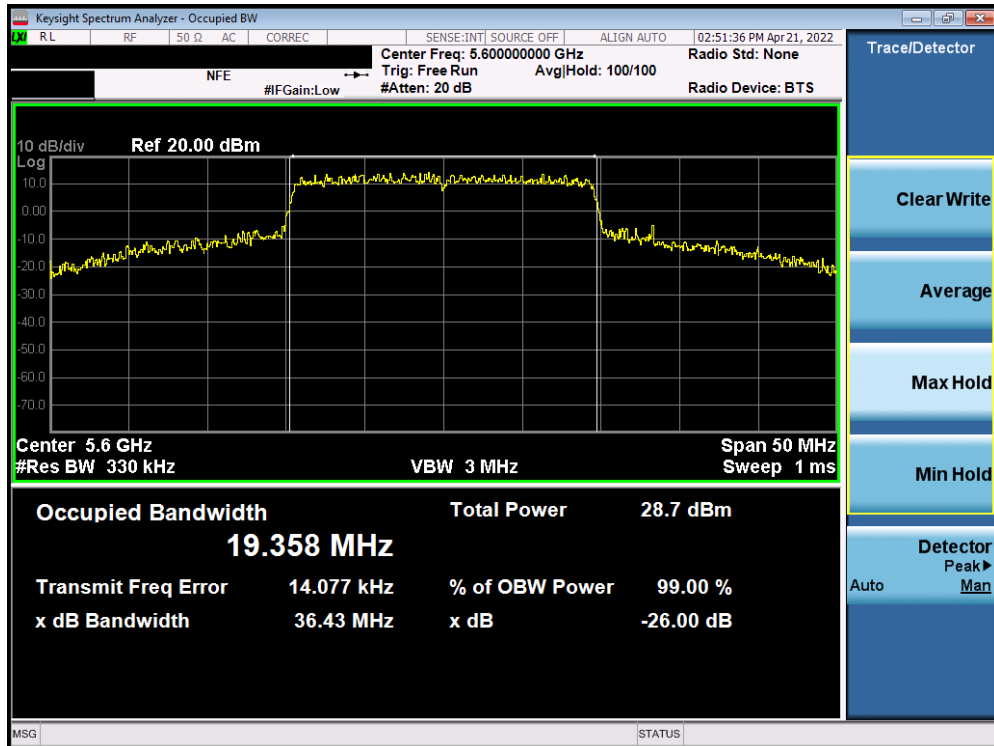


Plot 7-40. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 120)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 36 of 284

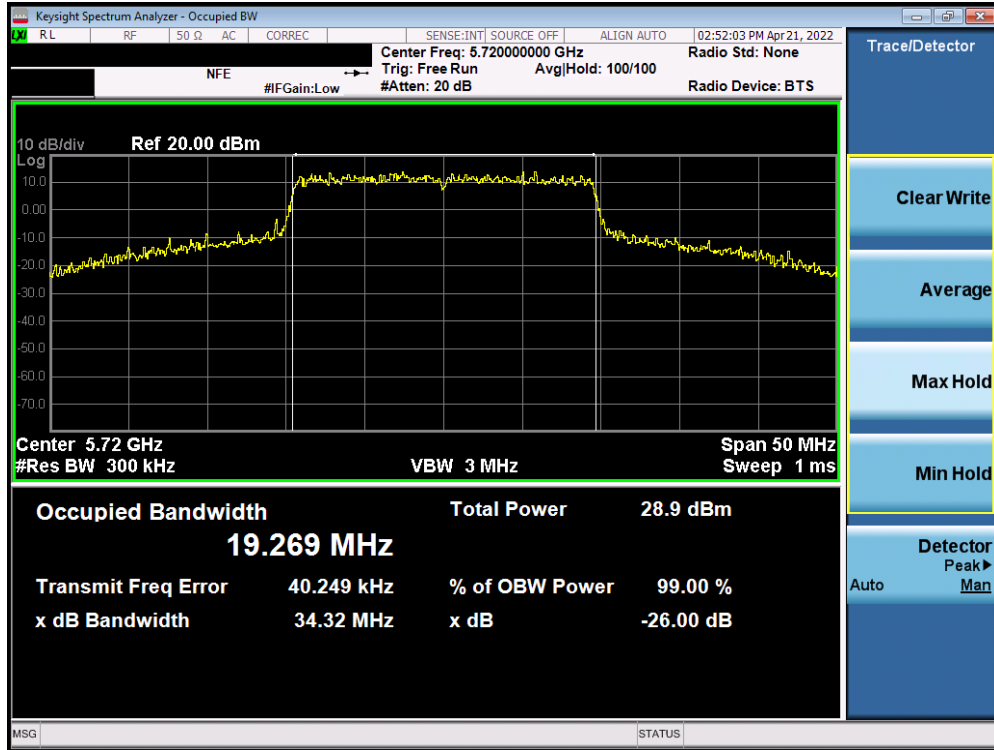


Plot 7-41. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 140)

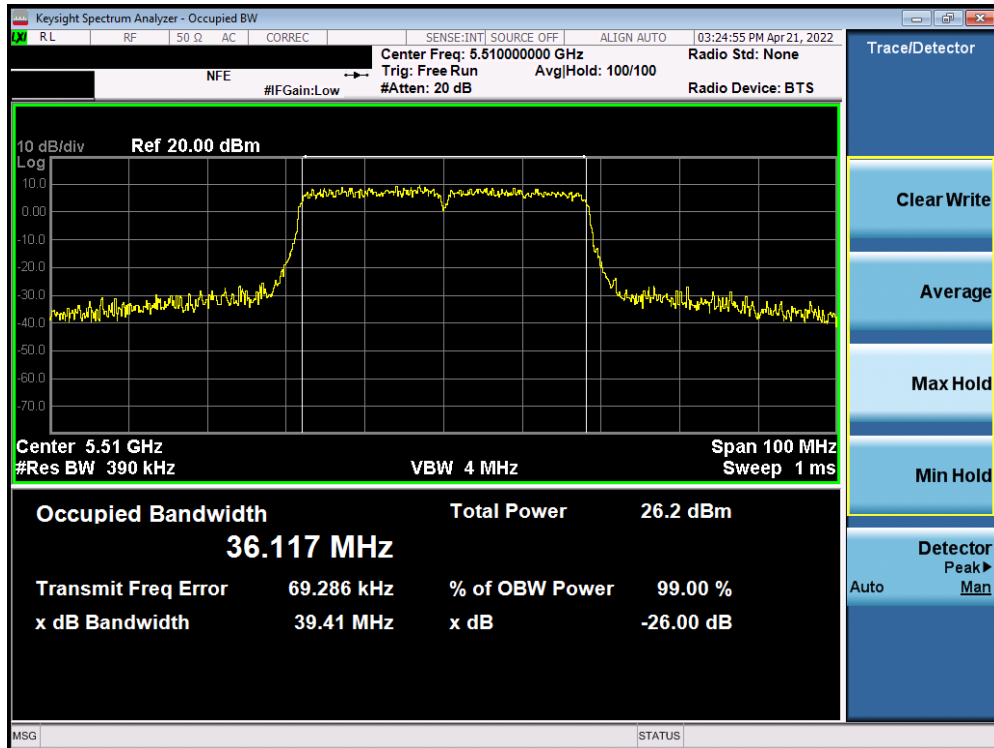


Plot 7-42. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 37 of 284

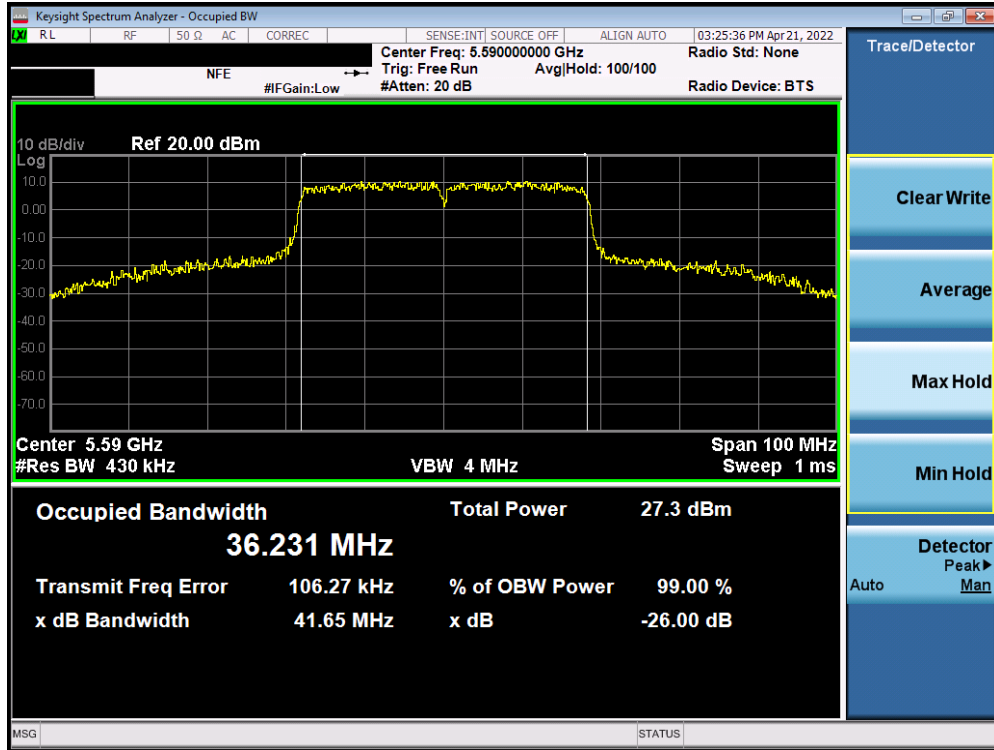


Plot 7-43. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

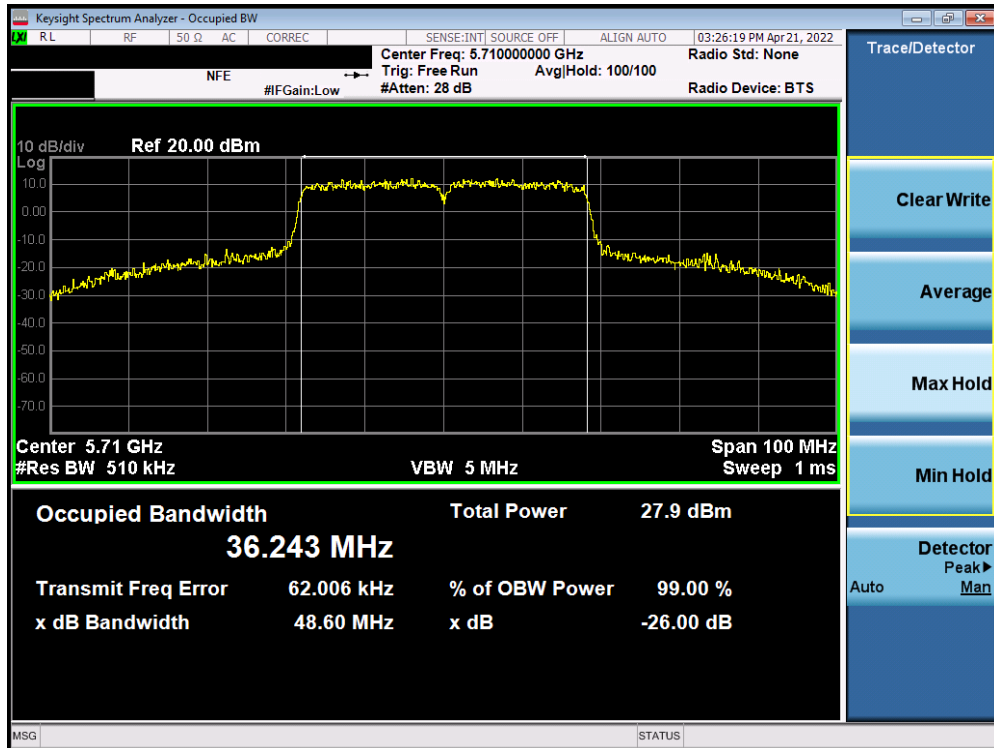


Plot 7-44. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 38 of 284

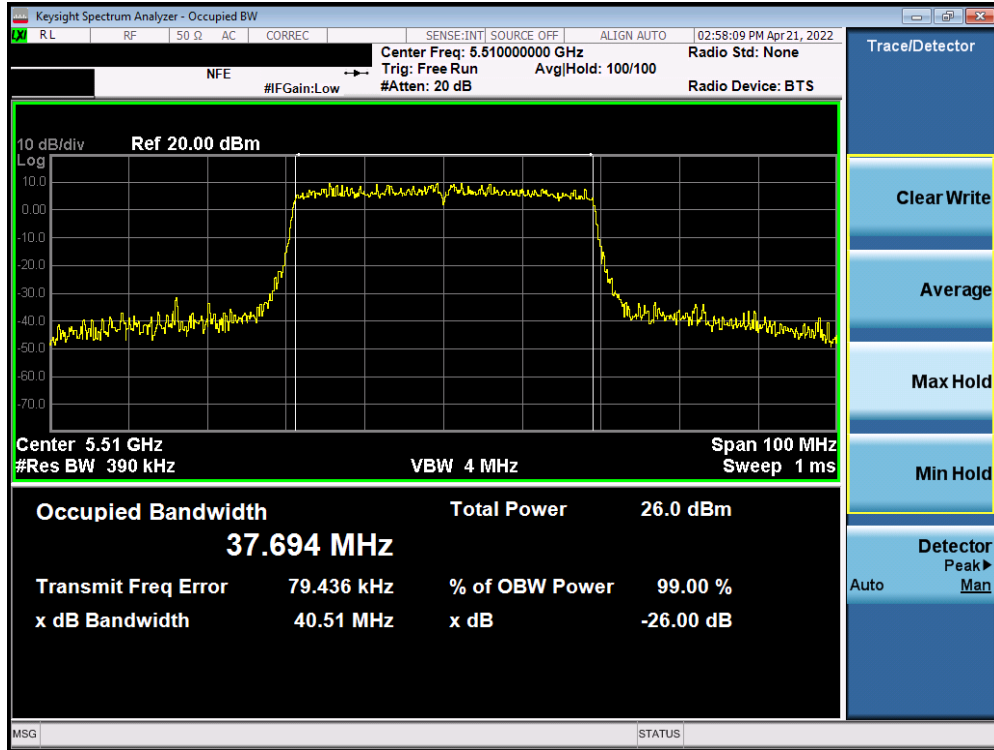


Plot 7-45. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 102)

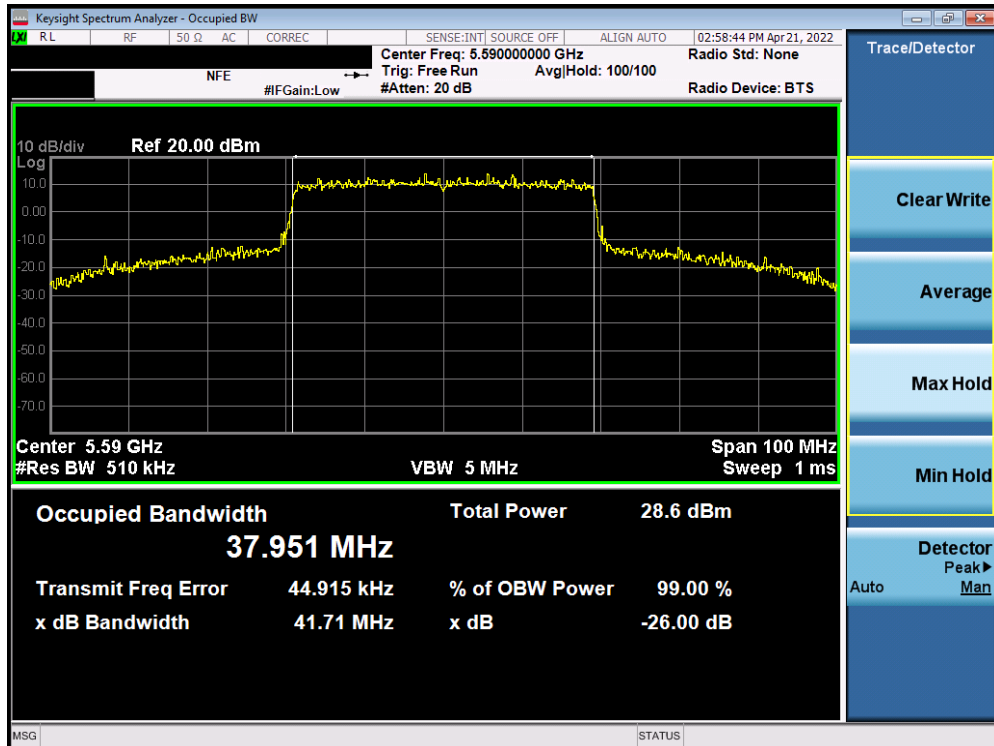


Plot 7-46. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 110)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 39 of 284

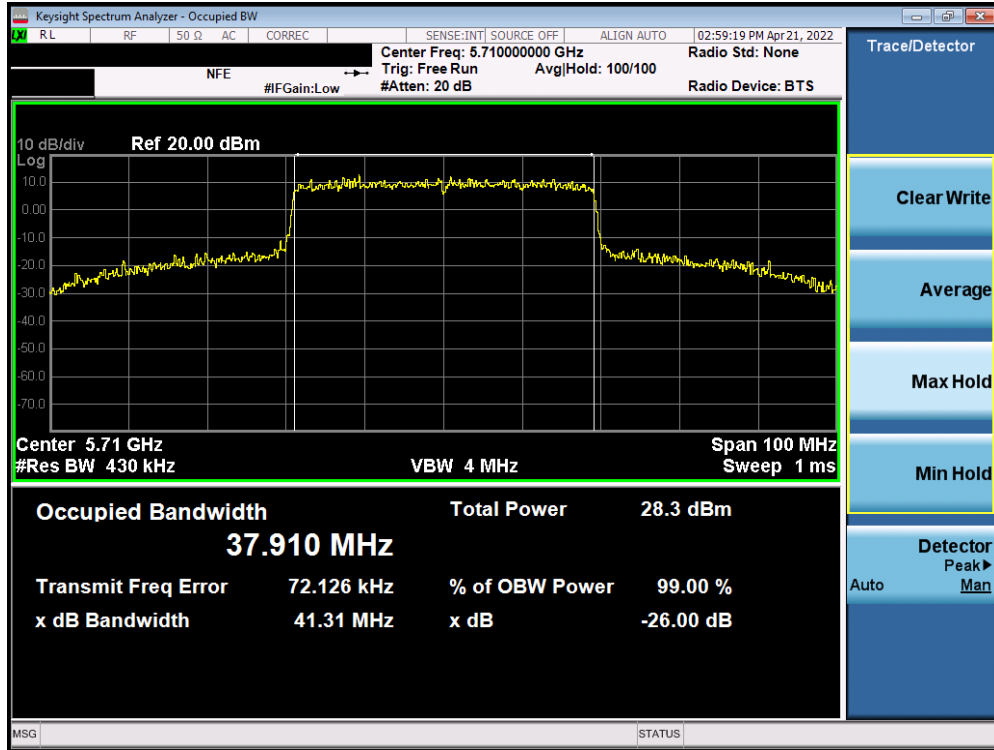


Plot 7-47. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 134)

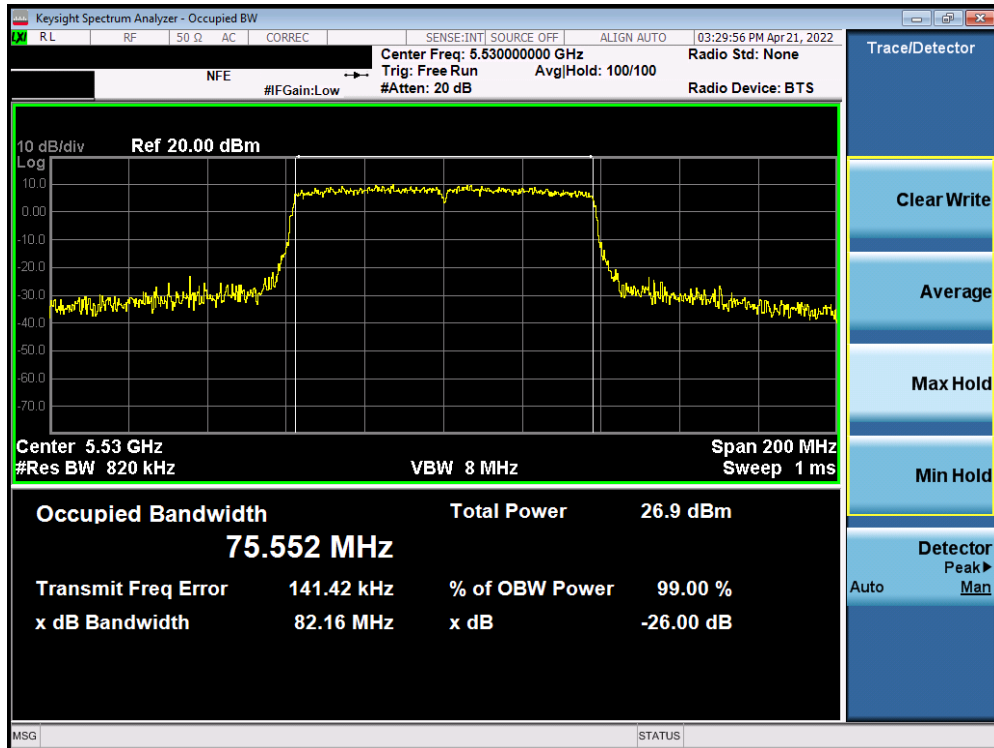


Plot 7-48. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 40 of 284



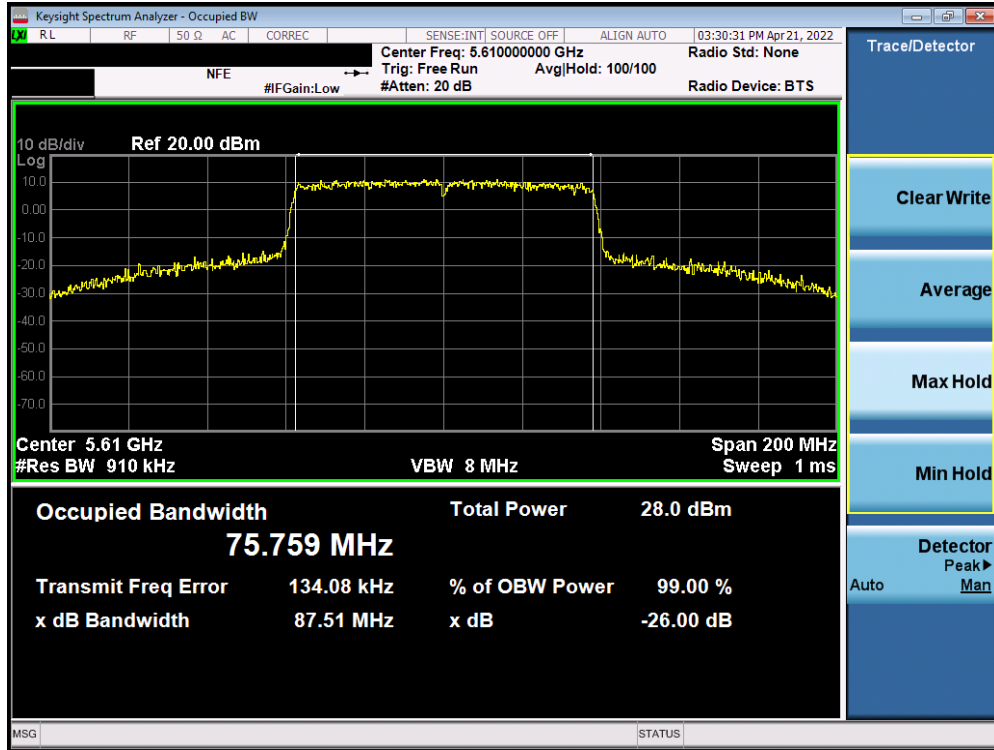


Plot 7-49. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

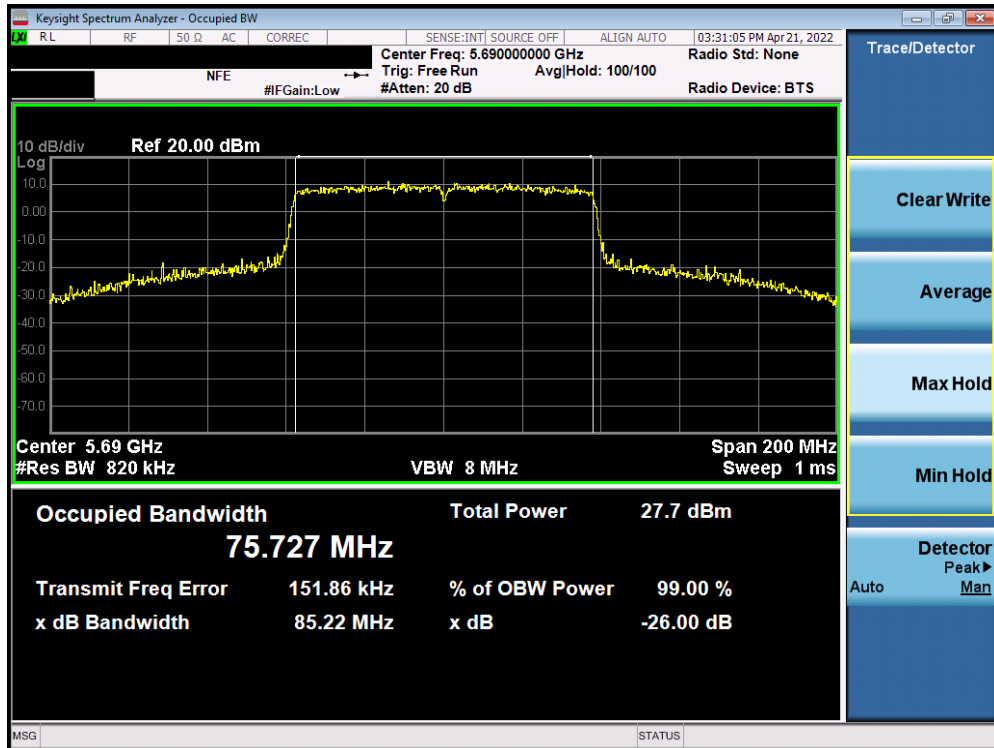


Plot 7-50. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: C3K1997		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device		Page 41 of 284

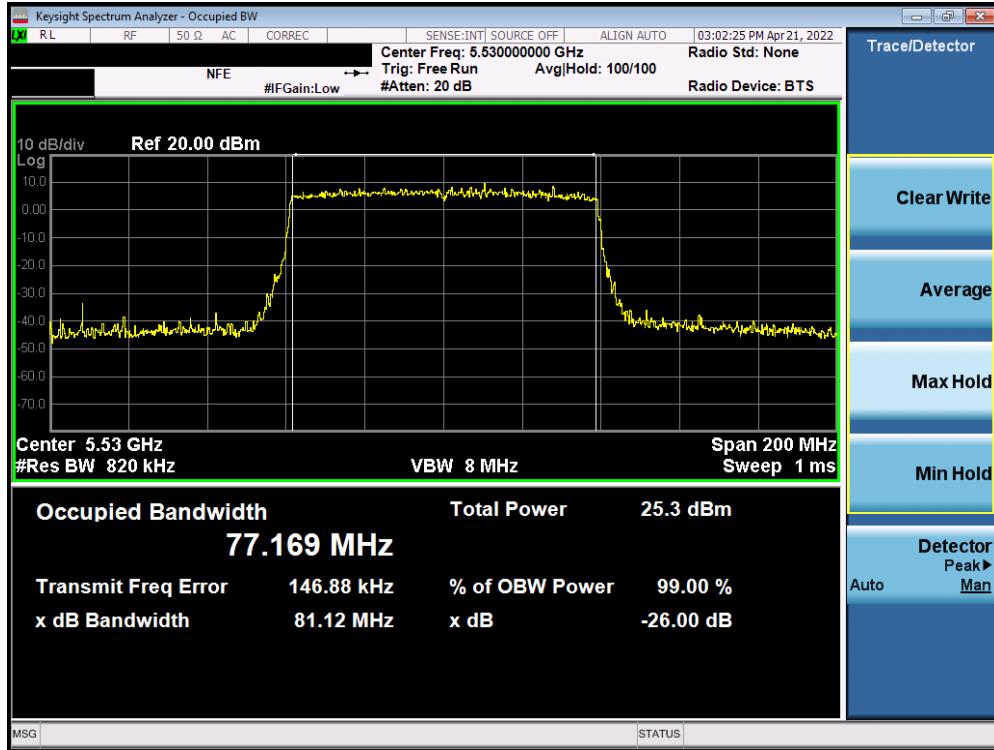


Plot 7-51. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 106)

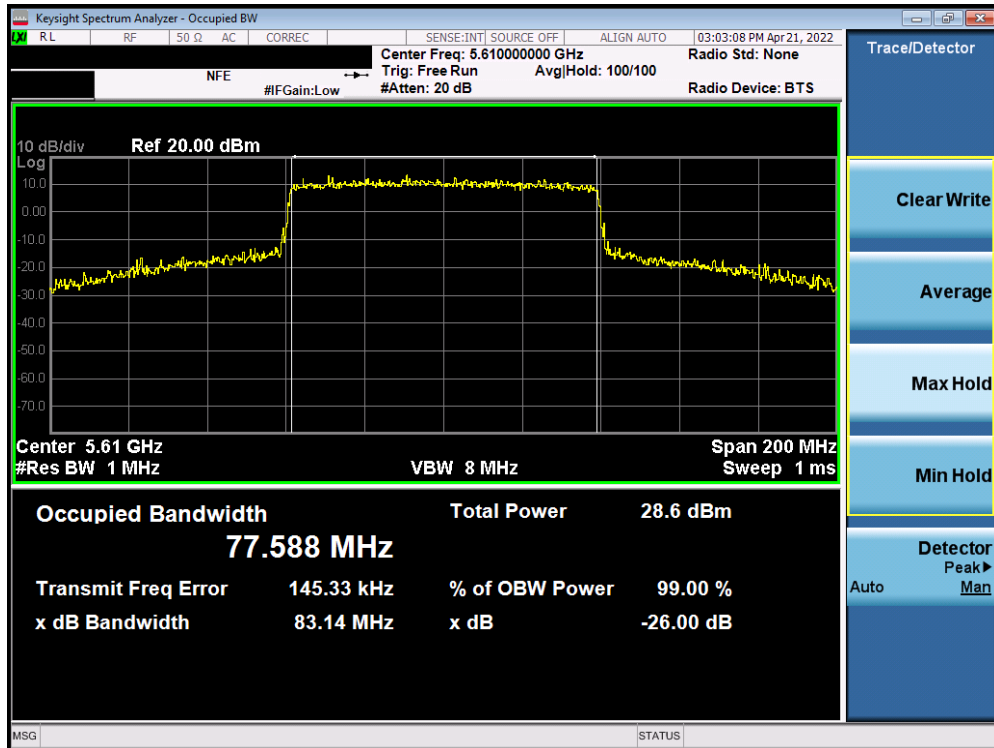


Plot 7-52. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 42 of 284

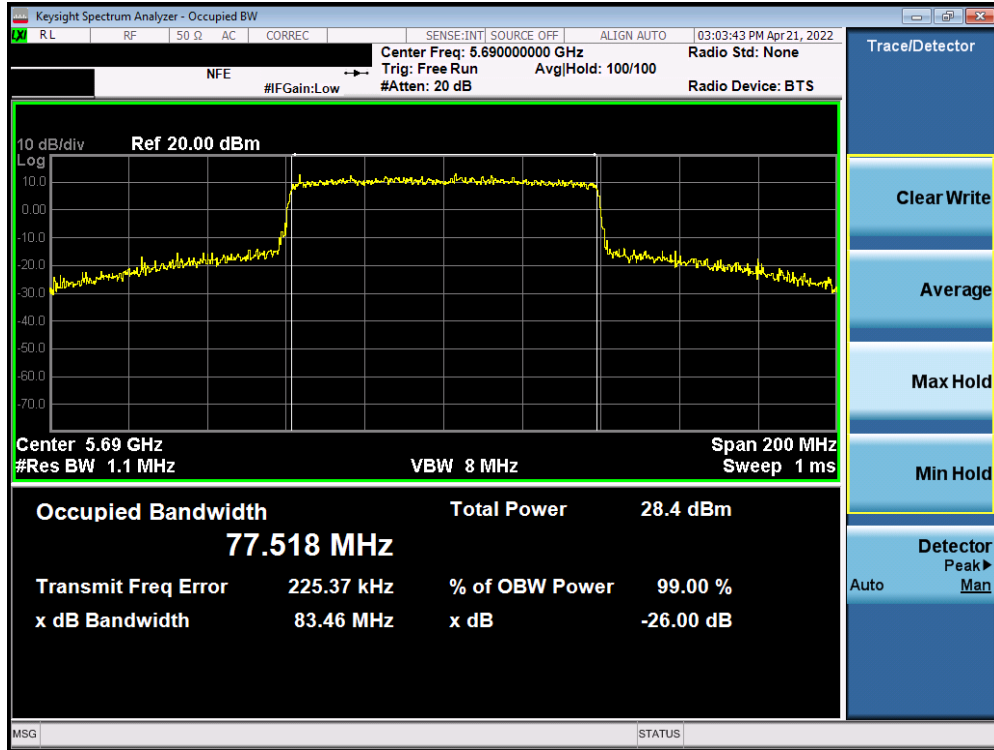


Plot 7-53. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 138)

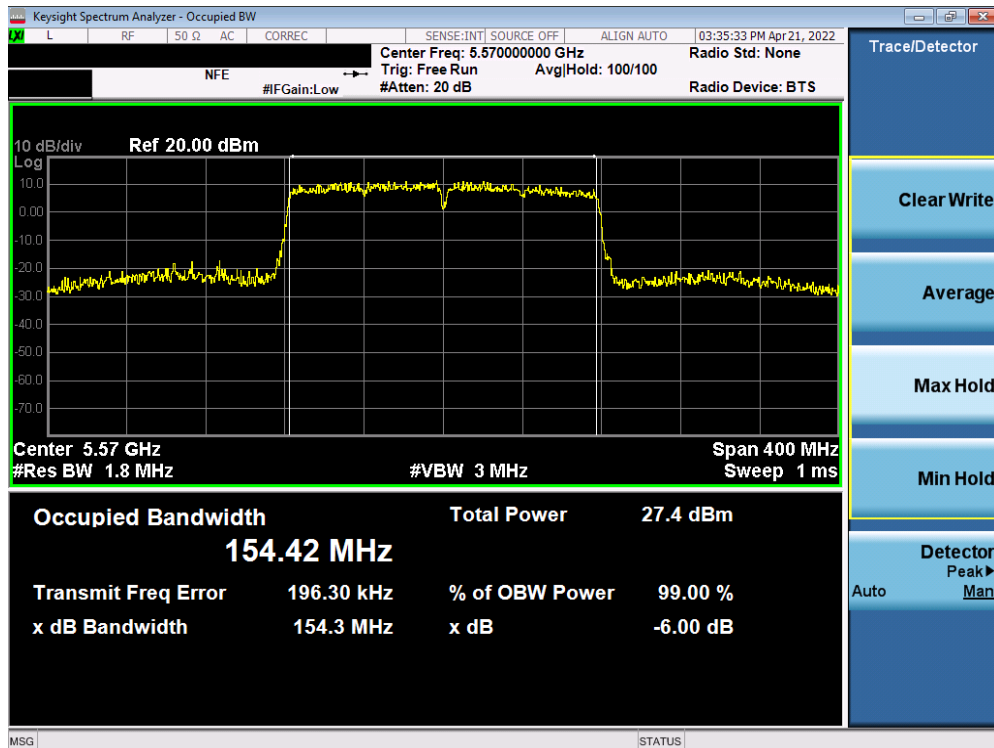

Plot 7-54. 26dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ac (UNII Band 2C) – Ch. 114)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 43 of 284

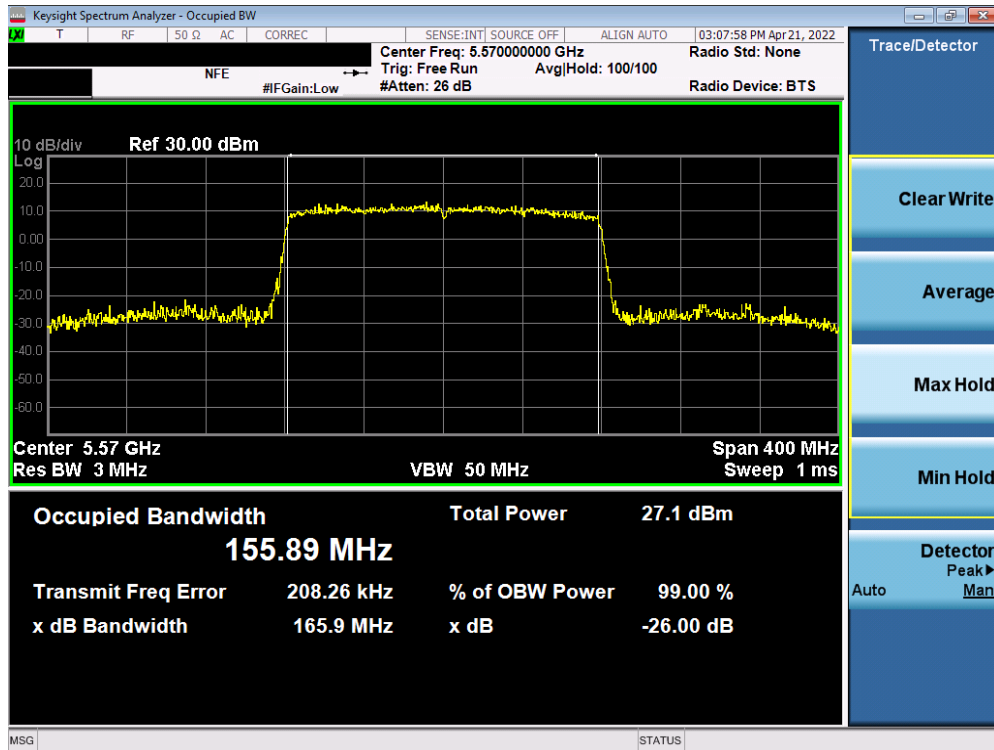

Plot 7-55. 26dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ax (UNII Band 2C) – Ch. 114)


FCC ID: C3K1997	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 44 of 284

## SISO Antenna-2 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	19.08
	5200	40	a	6	19.20
	5240	48	a	6	19.32
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.32
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.08
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	19.86
	5180	36	ax (20MHz)	6.5/7.2 (MCS0)	21.05
	5200	40	ax (20MHz)	6.5/7.2 (MCS0)	20.79
	5240	48	ax (20MHz)	6.5/7.2 (MCS0)	20.96
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.56
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.14
	5190	38	ax (40MHz)	13.5/15 (MCS0)	40.26
	5230	46	ax (40MHz)	13.5/15 (MCS0)	40.37
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	78.81
5210	42	ax (80MHz)	29.3/32.5 (MCS0)	81.57	
Band 1/2A	5250	50	ac (160MHz)	58.5/65 (MCS0)	164.70
	5250	50	ac (160MHz)	58.5/65 (MCS0)	166.00
Band 2A	5260	52	a	6	34.49
	5280	56	a	6	36.32
	5320	64	a	6	34.02
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	24.93
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	25.20
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	29.60
	5260	52	ax (20MHz)	6.5/7.2 (MCS0)	35.97
	5280	56	ax (20MHz)	6.5/7.2 (MCS0)	37.34
	5320	64	ax (20MHz)	6.5/7.2 (MCS0)	35.13
	5270	54	n (40MHz)	13.5/15 (MCS0)	40.21
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.62
	5270	54	ax (40MHz)	13.5/15 (MCS0)	40.71
	5310	62	ax (40MHz)	13.5/15 (MCS0)	40.57
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.40
	5290	58	ax (80MHz)	29.3/32.5 (MCS0)	81.78
	Band 2C	5500	100	a	6
5600		120	a	6	31.64
5720		144	a	6	31.47
5500		100	n (20MHz)	6.5/7.2 (MCS0)	30.41
5600		120	n (20MHz)	6.5/7.2 (MCS0)	29.34
5720		144	n (20MHz)	6.5/7.2 (MCS0)	29.28
5500		100	ax (20MHz)	6.5/7.2 (MCS0)	35.70
5600		120	ax (20MHz)	6.5/7.2 (MCS0)	35.48
5720		144	ax (20MHz)	6.5/7.2 (MCS0)	31.96
5510		102	n (40MHz)	13.5/15 (MCS0)	39.46
5590		118	n (40MHz)	13.5/15 (MCS0)	41.33
5710		142	n (40MHz)	13.5/15 (MCS0)	40.81
5510		102	ax (40MHz)	13.5/15 (MCS0)	40.21
5590		118	ax (40MHz)	13.5/15 (MCS0)	40.12
5710		142	ax (40MHz)	13.5/15 (MCS0)	40.90
5530		106	ac (80MHz)	29.3/32.5 (MCS0)	81.63
5610		122	ac (80MHz)	29.3/32.5 (MCS0)	97.42
5690		138	ac (80MHz)	29.3/32.5 (MCS0)	92.11
5530		106	ax (80MHz)	29.3/32.5 (MCS0)	82.43
5610		122	ax (80MHz)	29.3/32.5 (MCS0)	86.62
5690	138	ax (80MHz)	29.3/32.5 (MCS0)	81.81	
5570	114	ac (160MHz)	58.5/65 (MCS0)	165.60	
5570	114	ac (160MHz)	58.5/65 (MCS0)	156.00	

Table 7-3. Conducted Bandwidth Measurements SISO ANT2

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 45 of 284

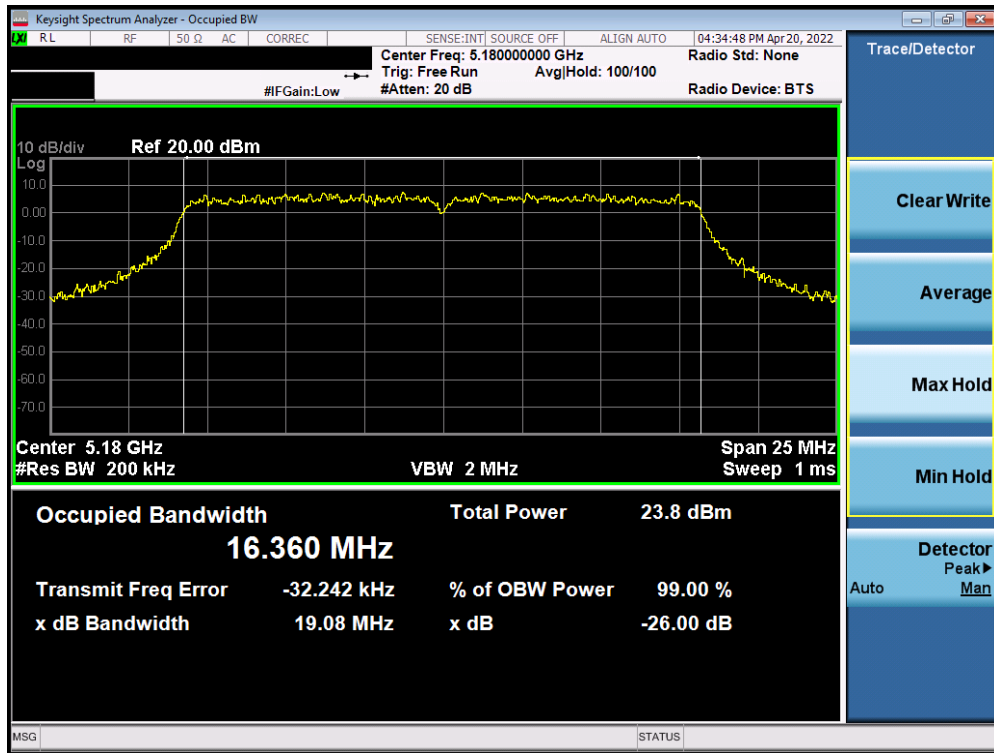


Plot 7-56. 26dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 1) – Ch. 36)

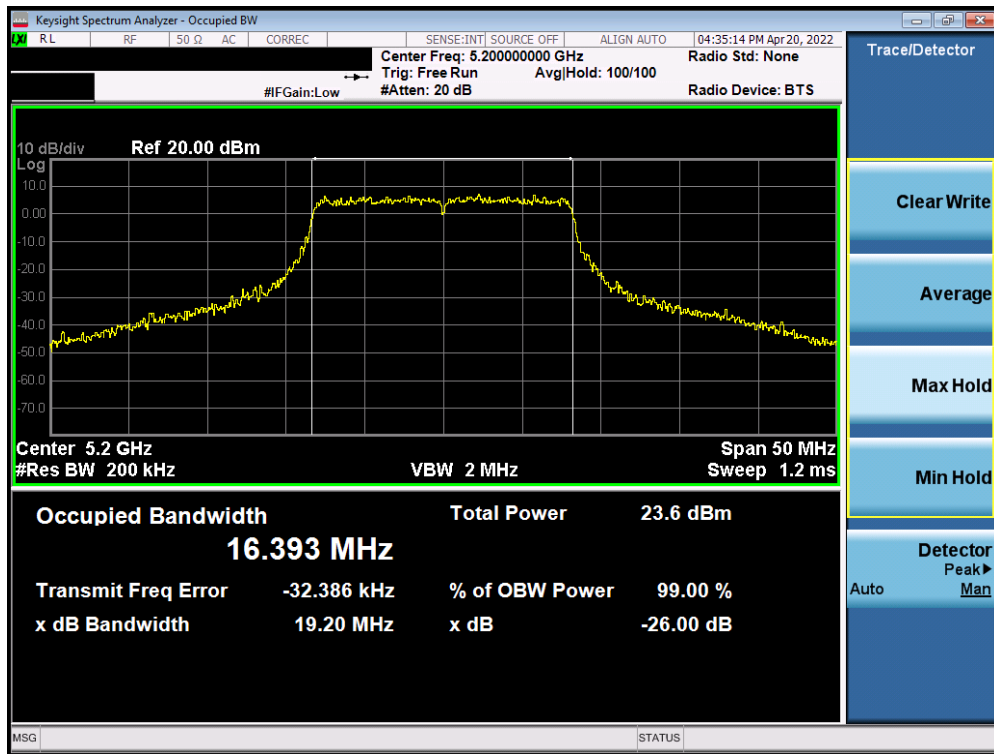


Plot 7-57. 26dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 1) – Ch. 40)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 46 of 284

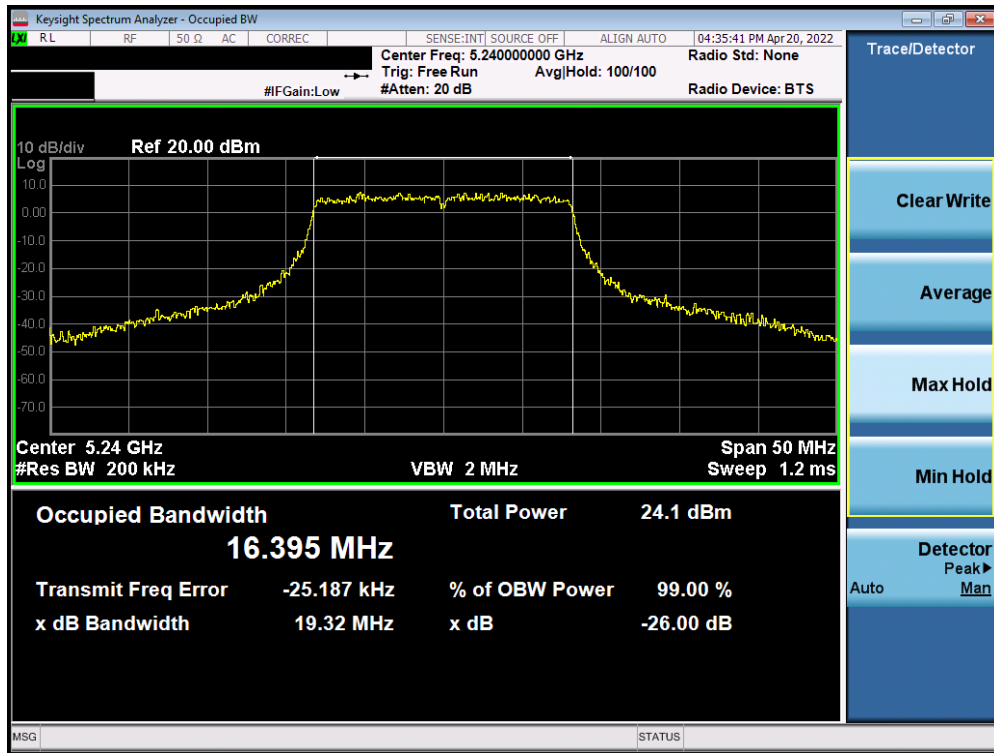


Plot 7-58. 26dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 1) – Ch. 48)

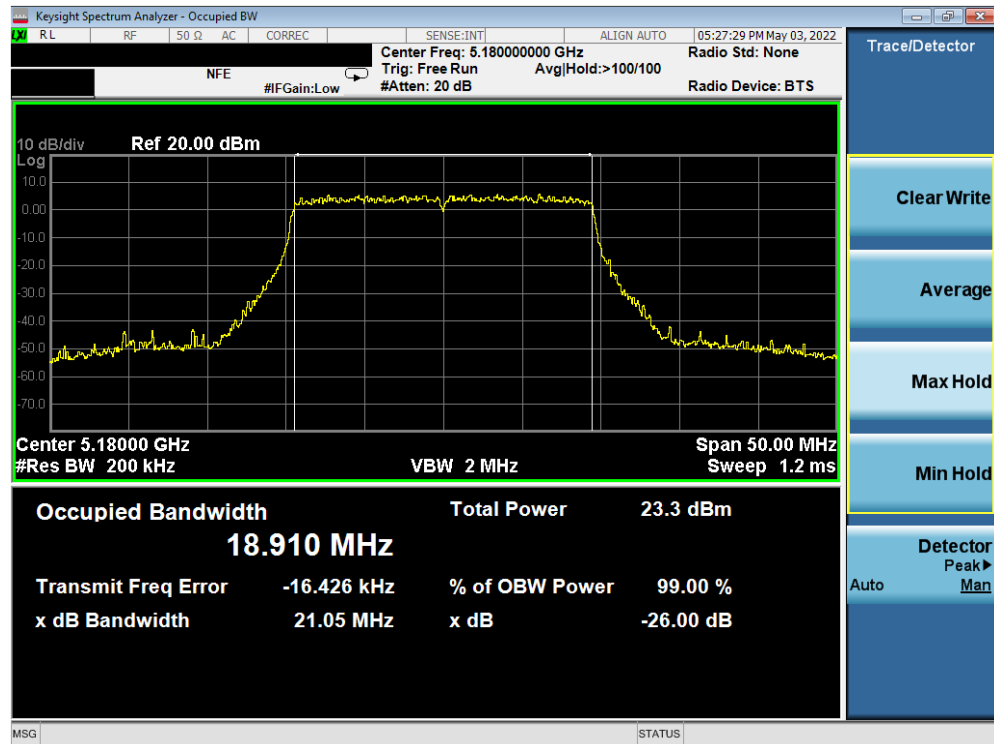


Plot 7-59. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 47 of 284

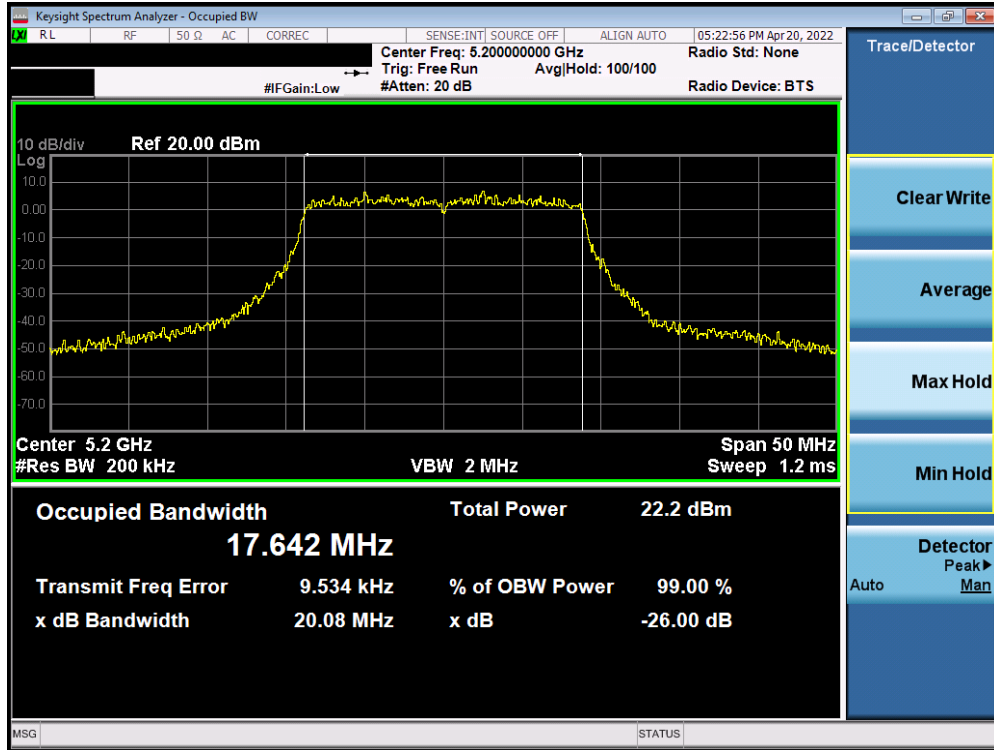


Plot 7-60. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

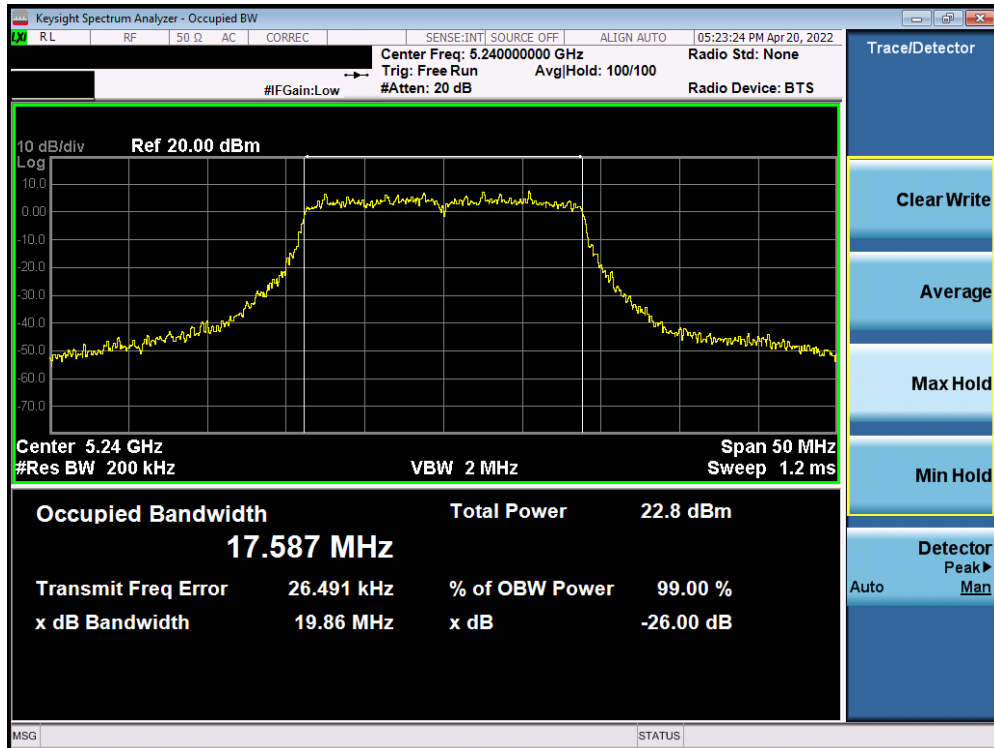


Plot 7-61. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: C3K1997		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 48 of 284	



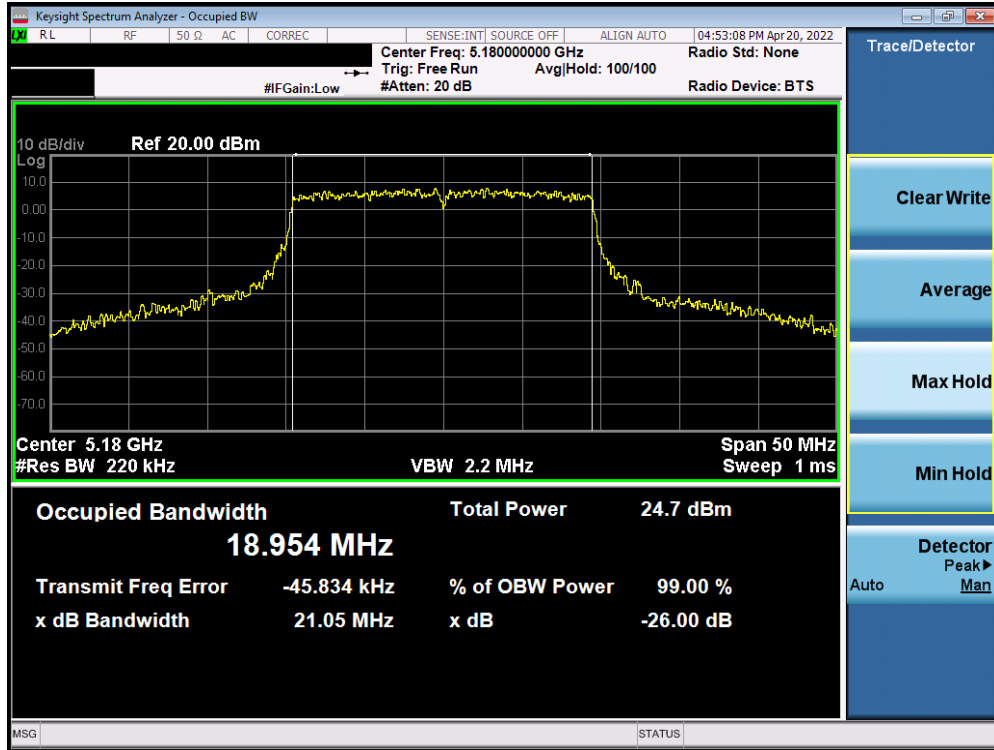


Plot 7-62. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 1) – Ch. 36)

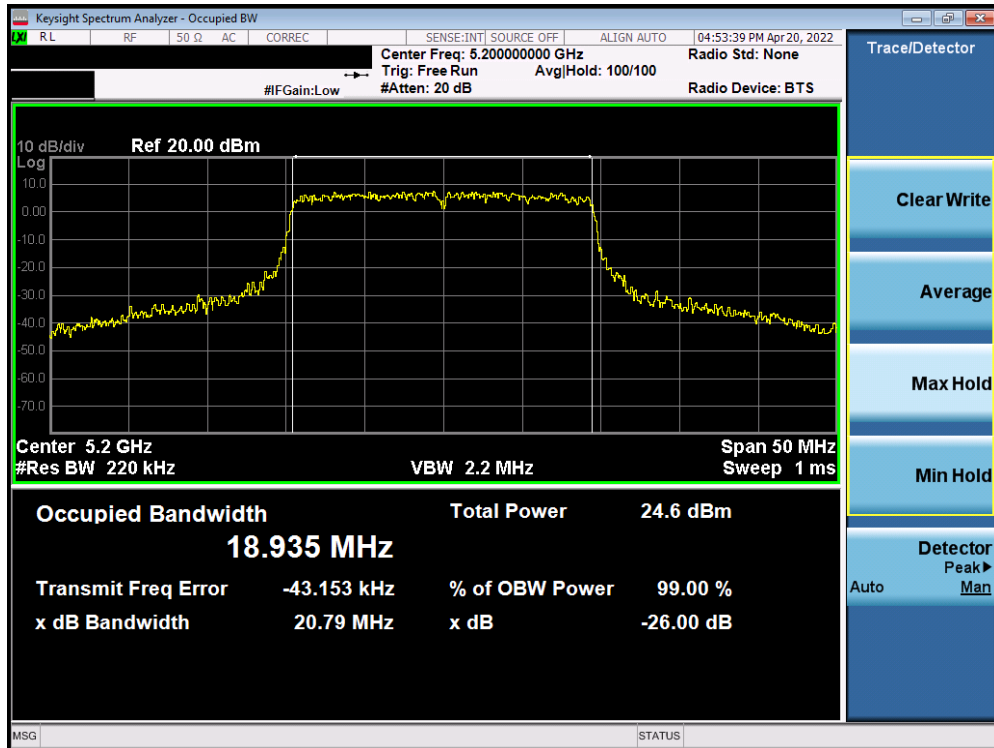


Plot 7-63. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 1) – Ch. 40)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 49 of 284

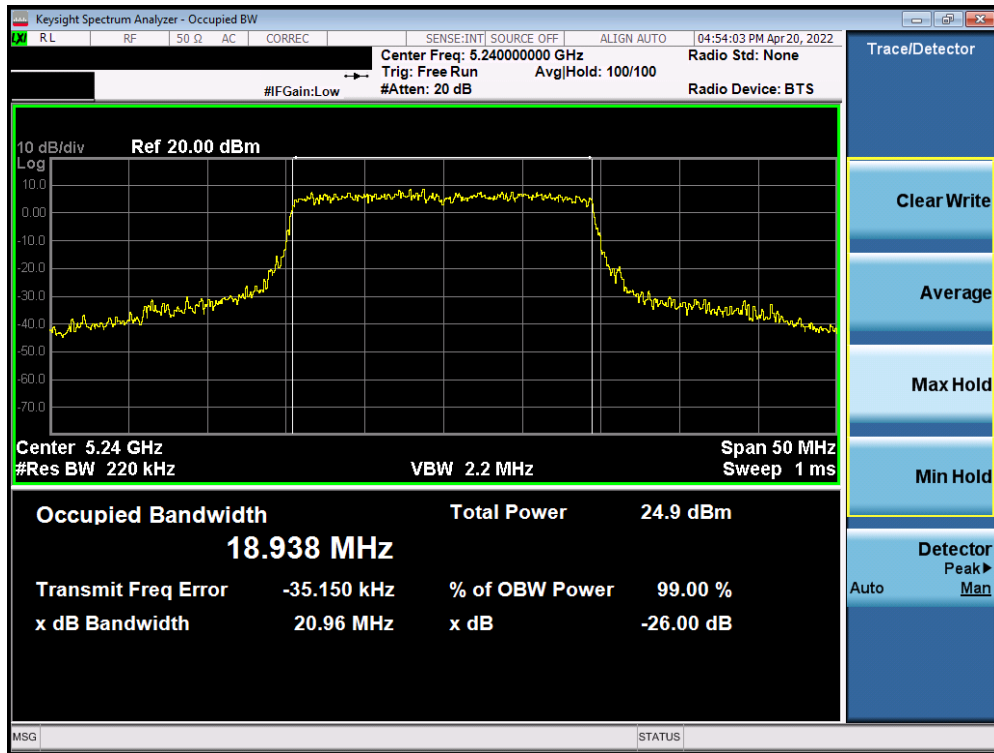


Plot 7-64. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 1) – Ch. 48)

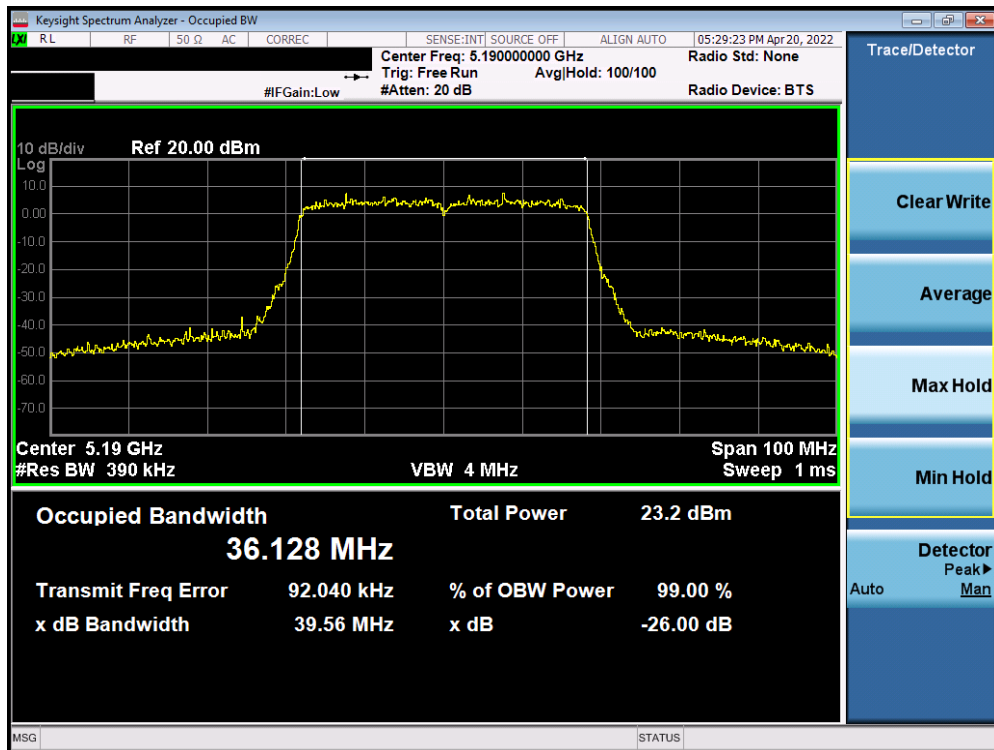


Plot 7-65. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 50 of 284

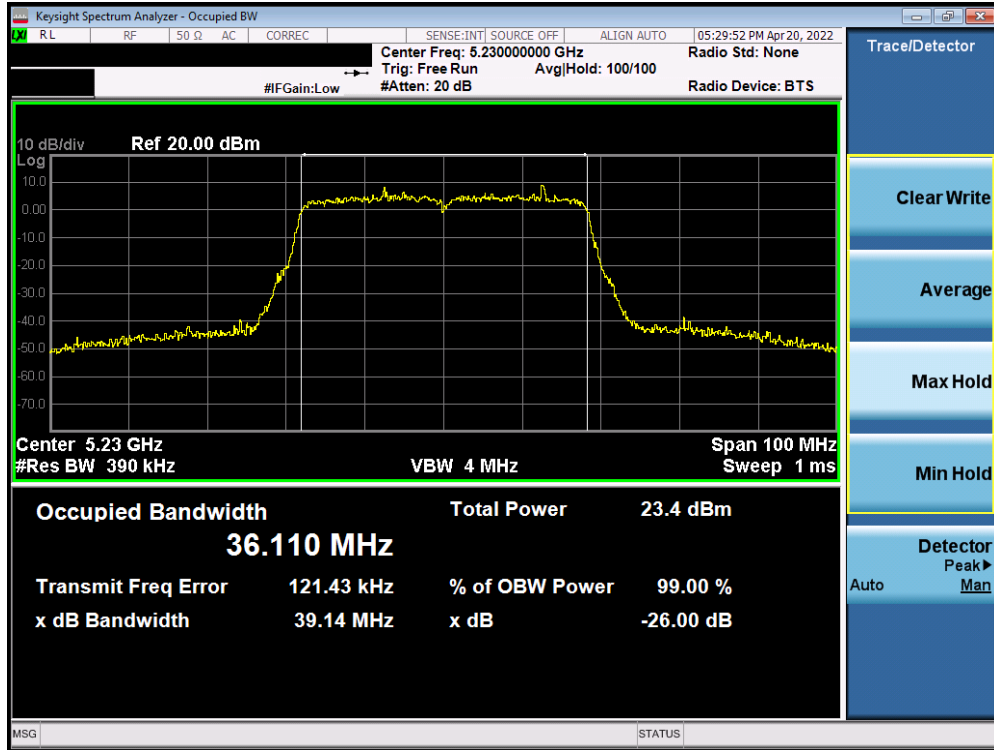


Plot 7-66. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

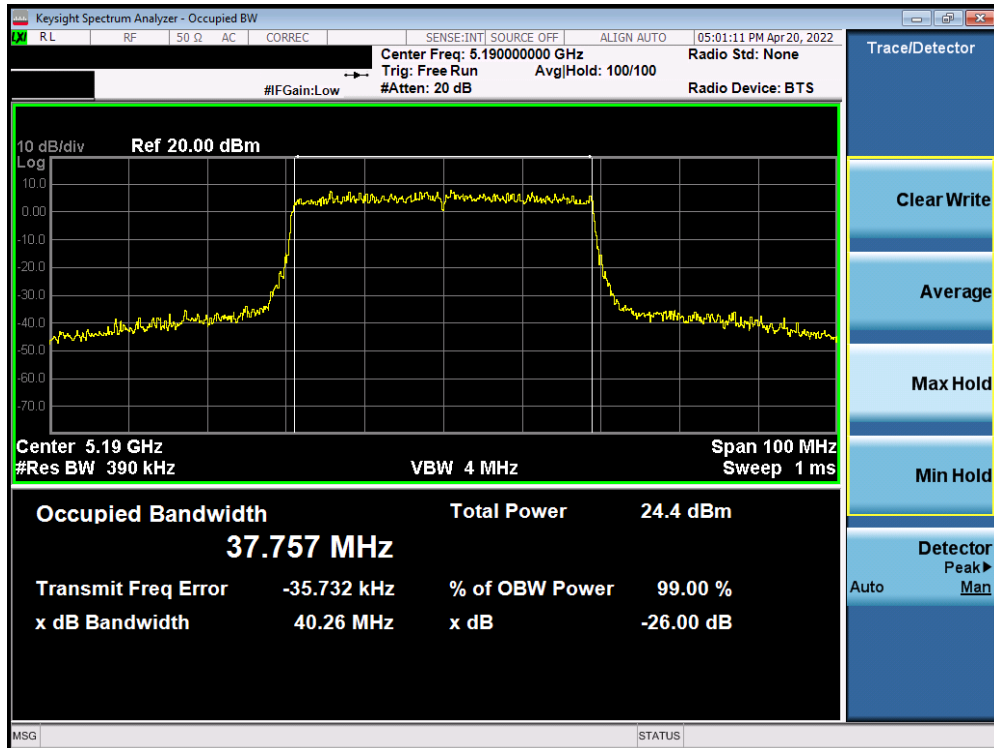


Plot 7-67. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 1) – Ch. 38)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 51 of 284

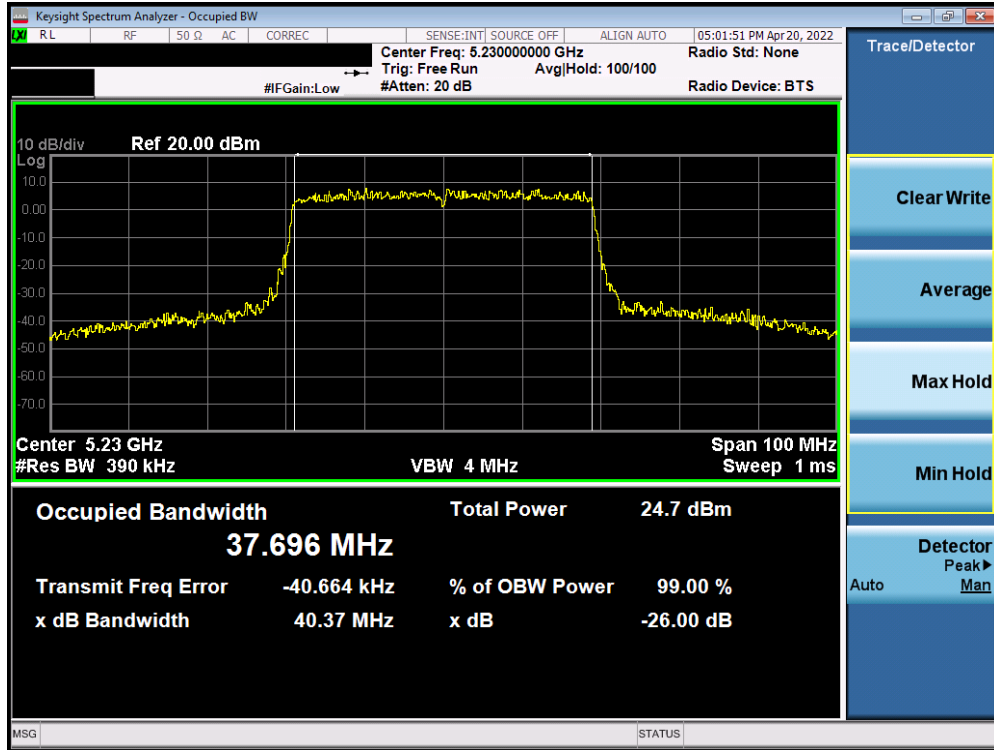


Plot 7-68. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 1) – Ch. 46)

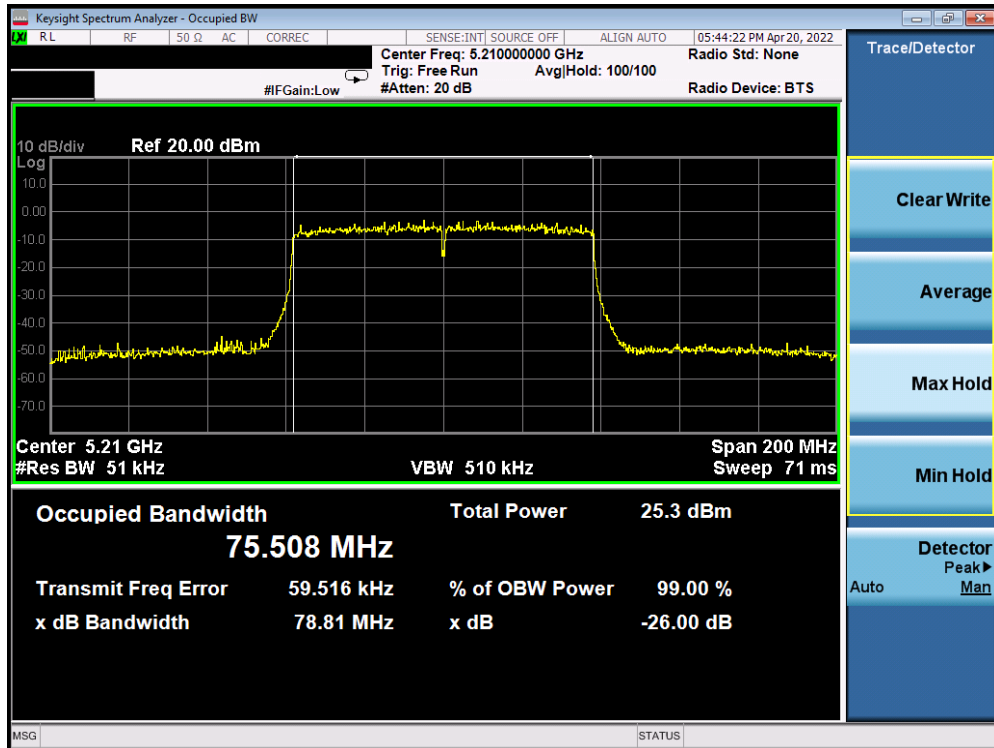


Plot 7-69. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 52 of 284

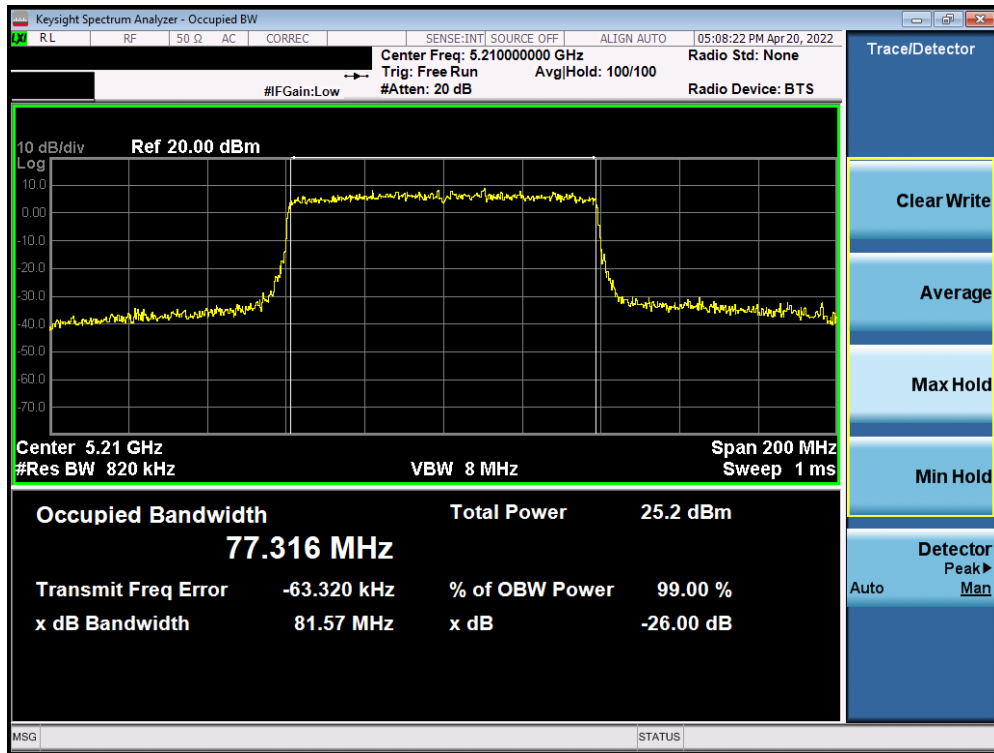


Plot 7-70. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

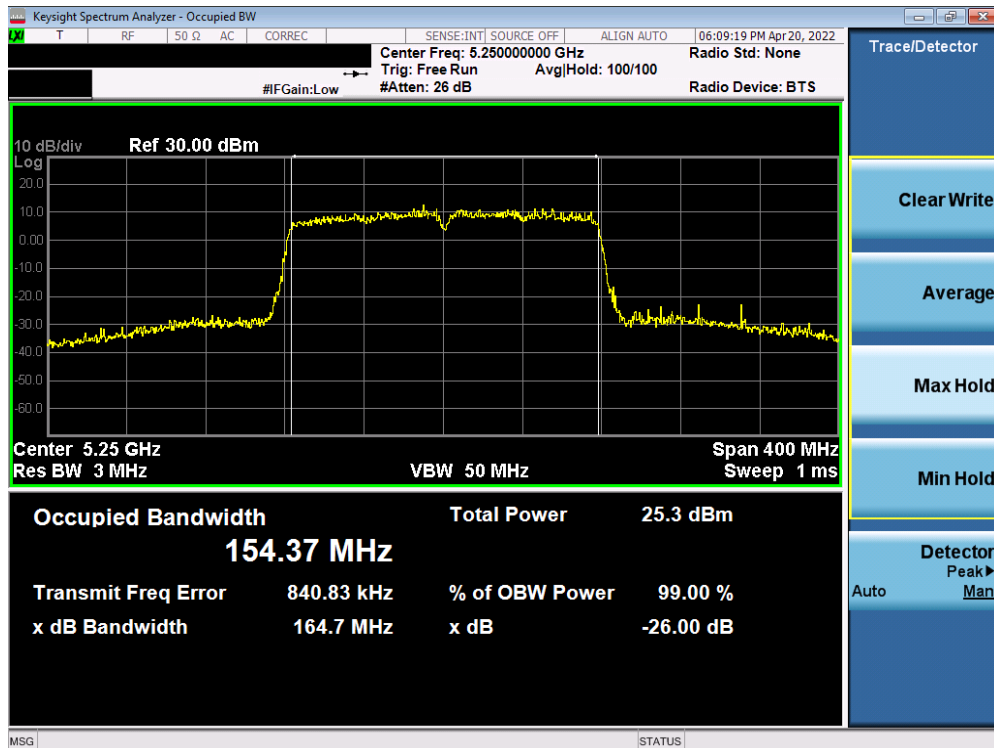


Plot 7-71. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 1/2A) – Ch. 50)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 53 of 284

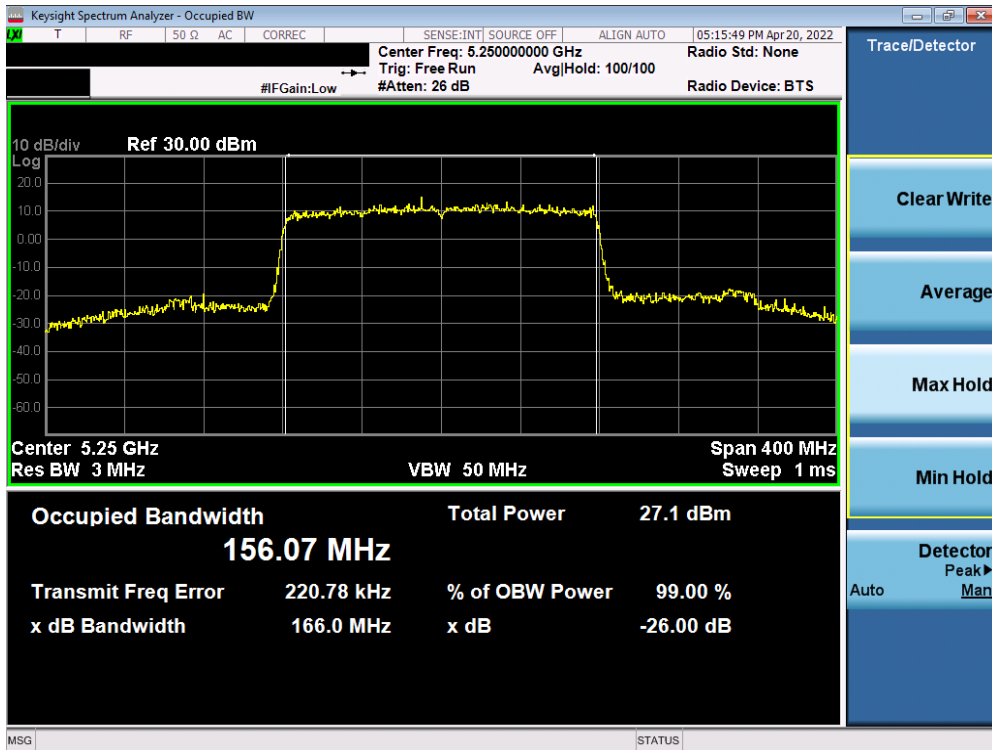


Plot 7-72. 26dB Bandwidth Plot SISO ANT2 (160MHz BW 802.11ax (UNII Band 1/2A) – Ch. 50)

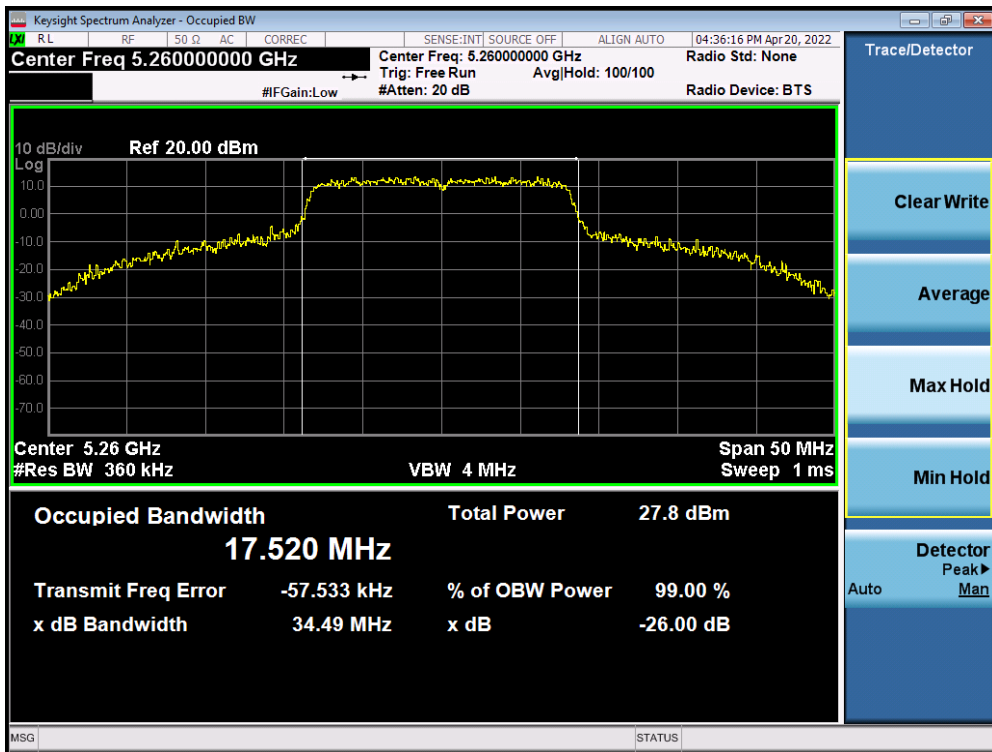


Plot 7-73. 26dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 54 of 284

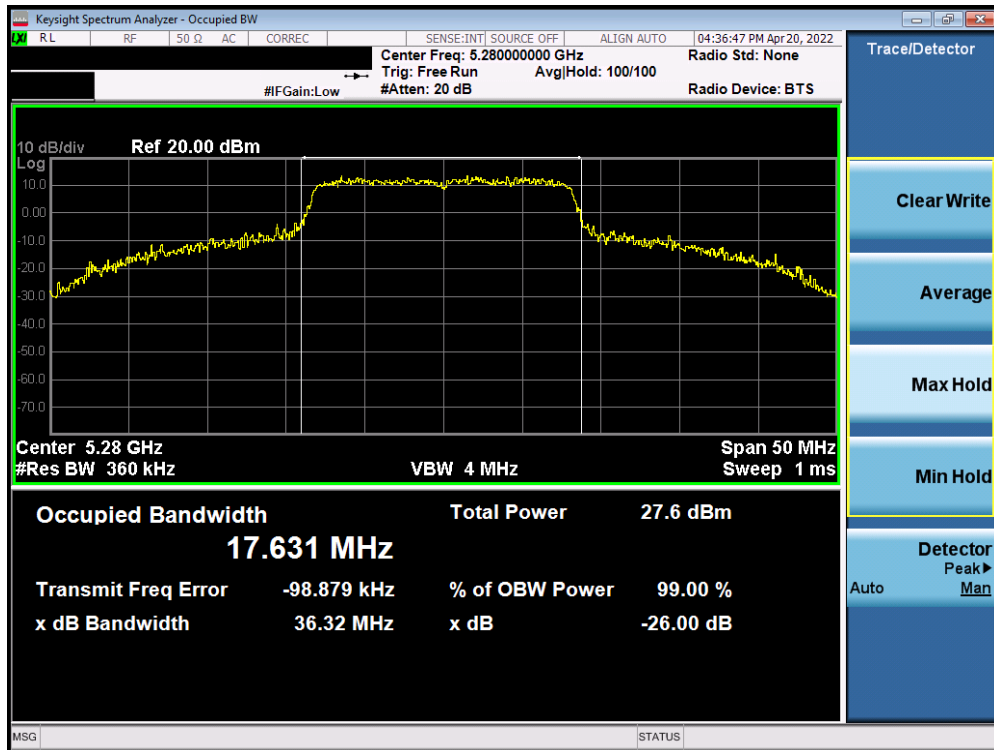


Plot 7-74. 26dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 2A) – Ch. 56)

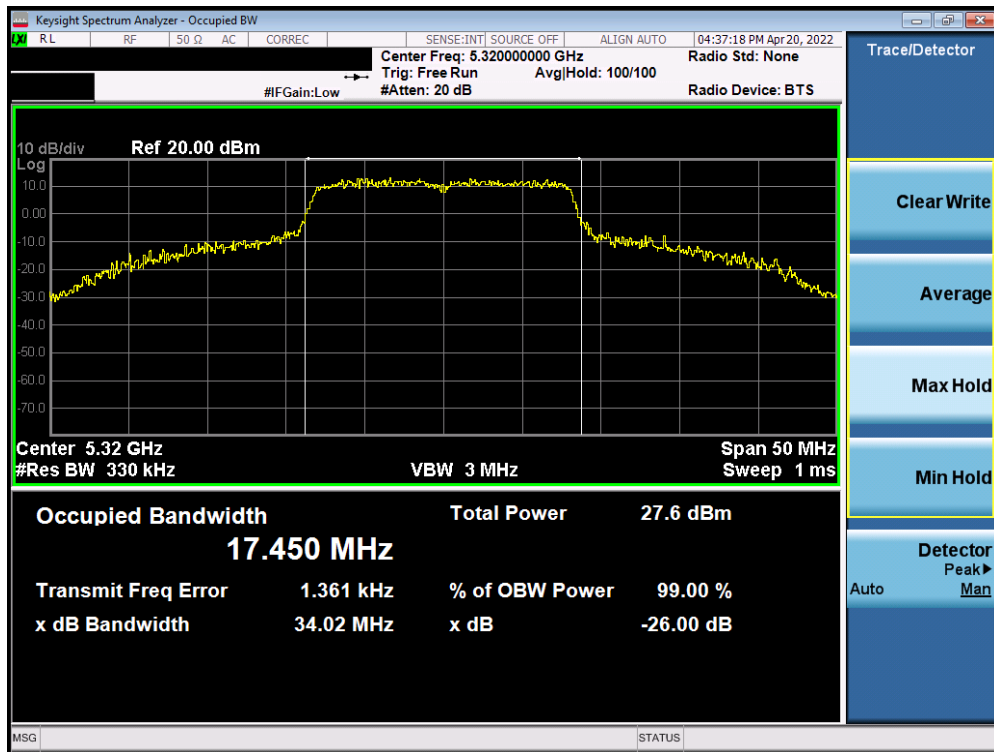


Plot 7-75. 26dB Bandwidth Plot SISO ANT2 (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 55 of 284

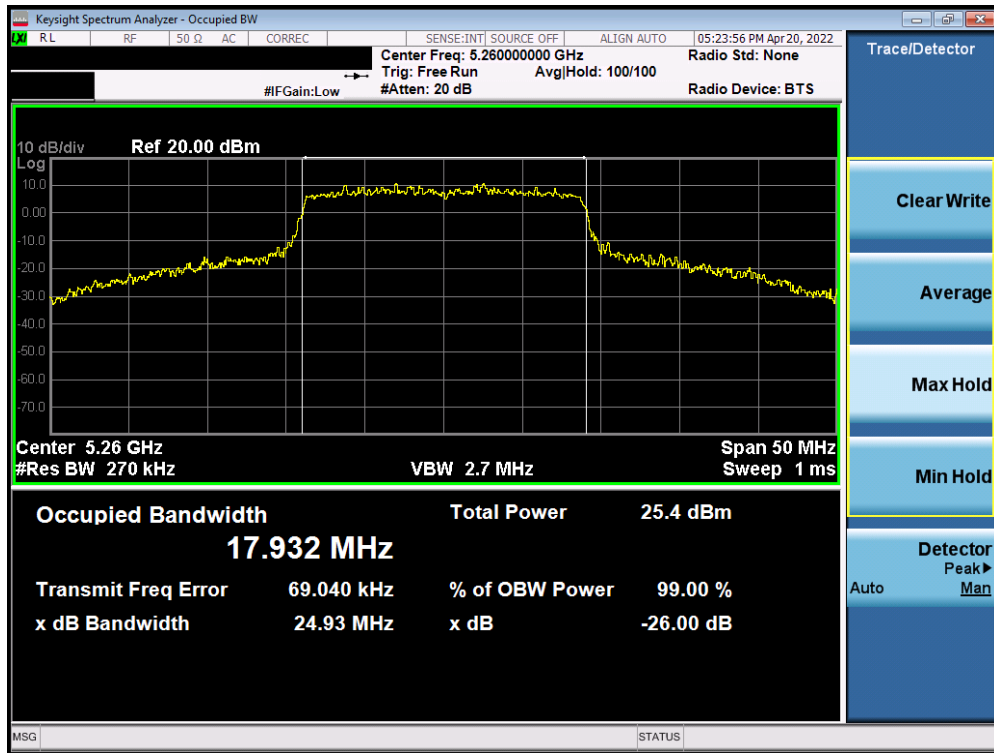


Plot 7-76. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

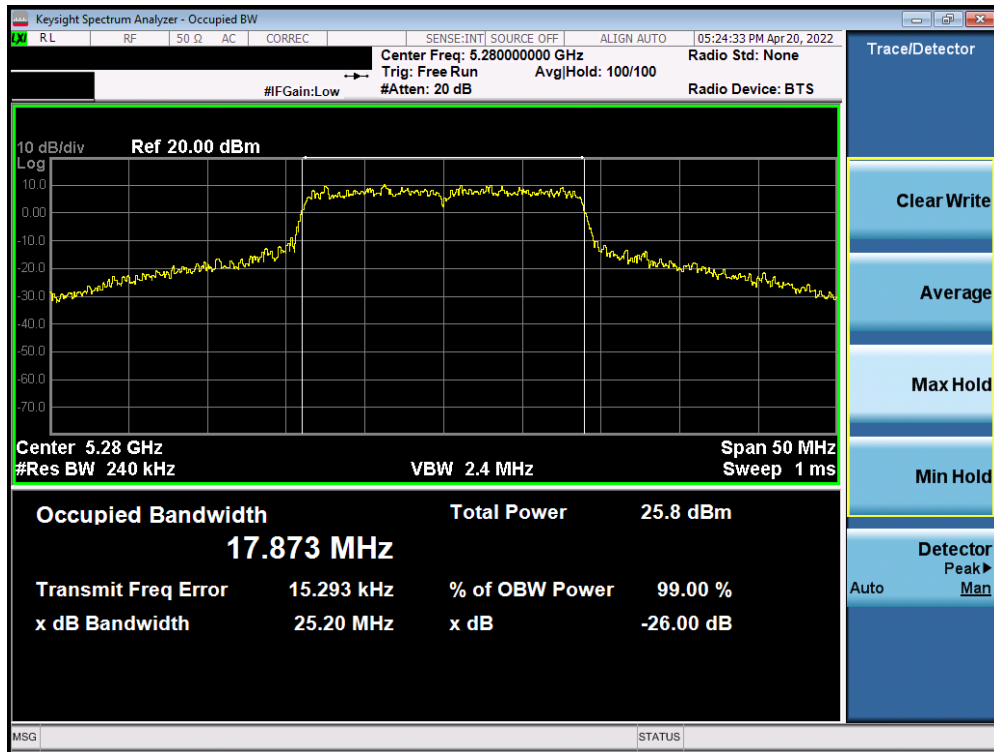


Plot 7-77. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 56 of 284



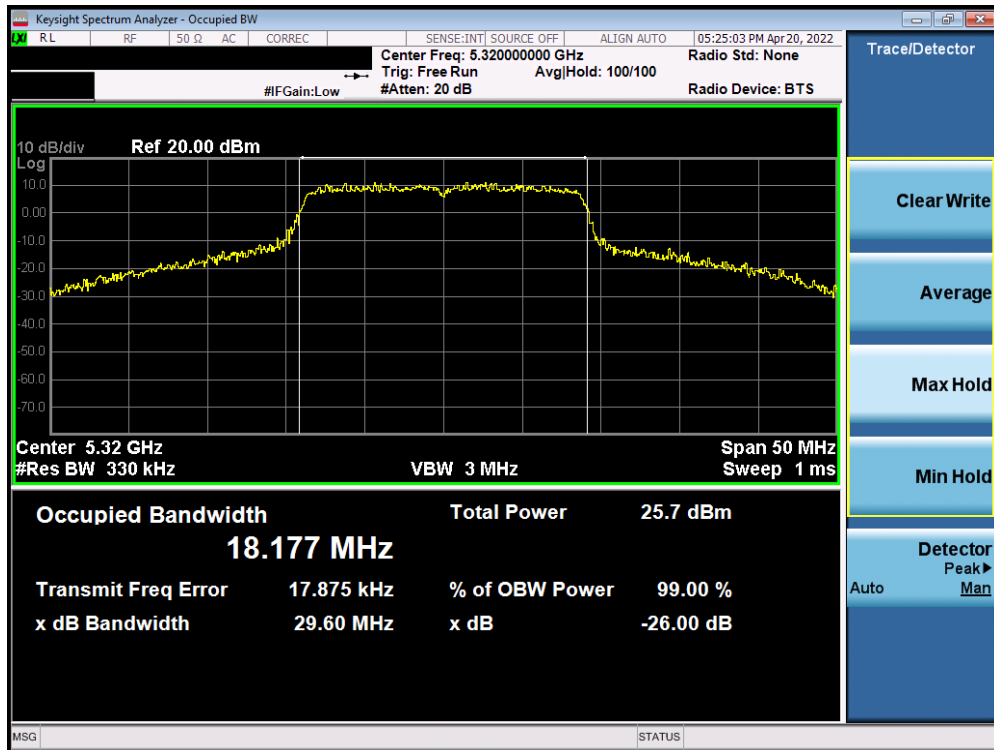


Plot 7-78. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

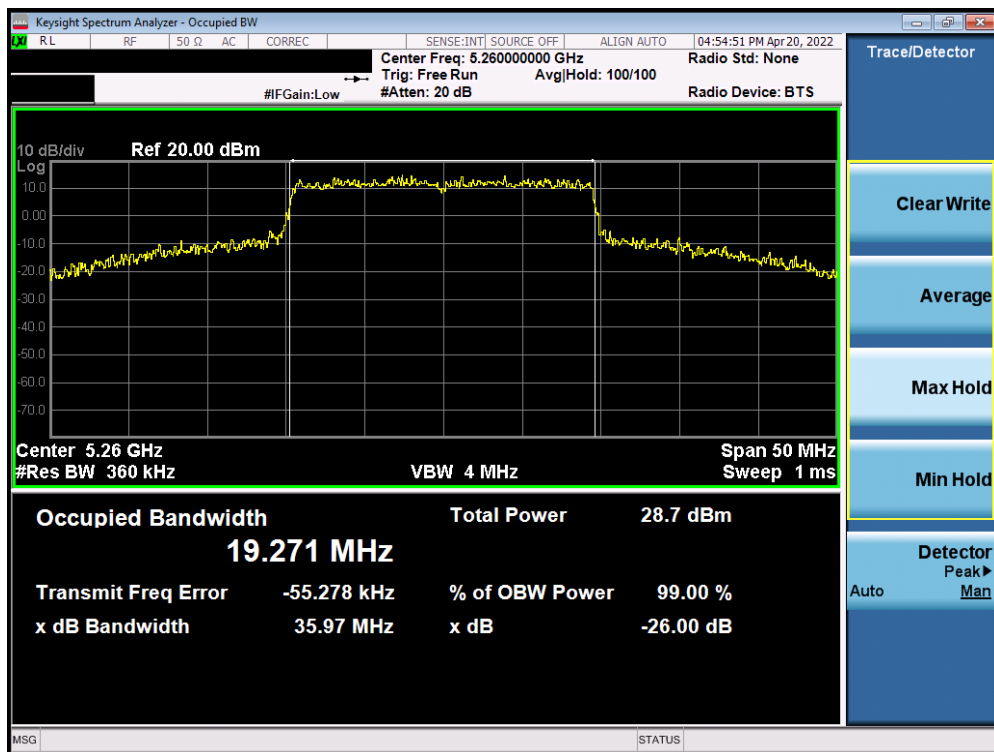


Plot 7-79. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 52)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1-C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 57 of 284

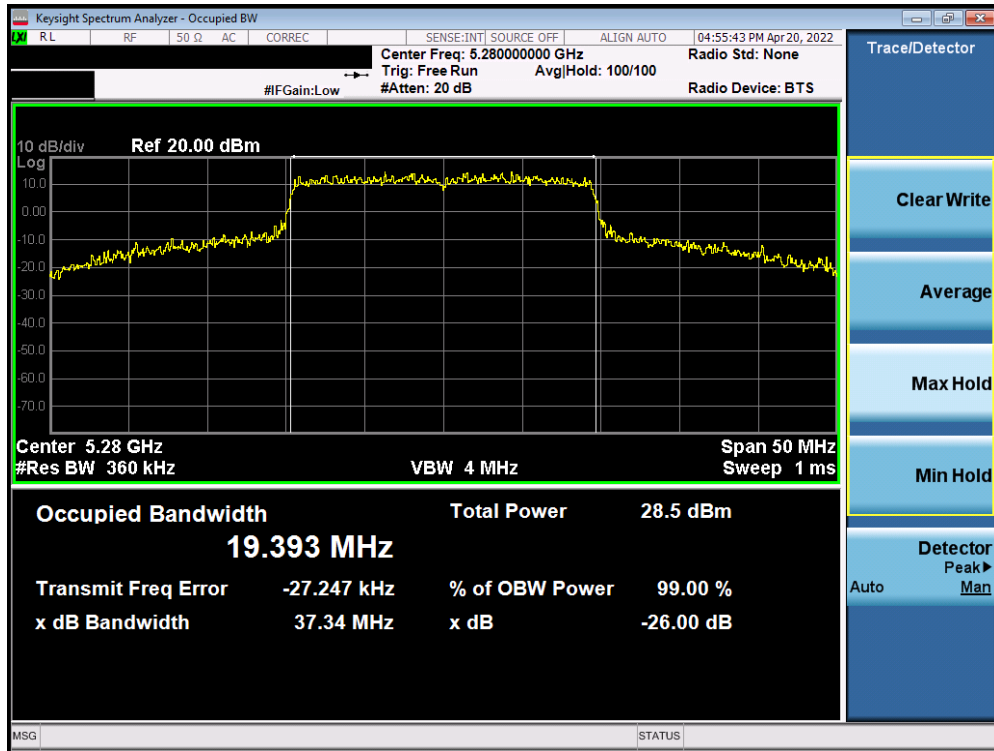


Plot 7-80. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 56)

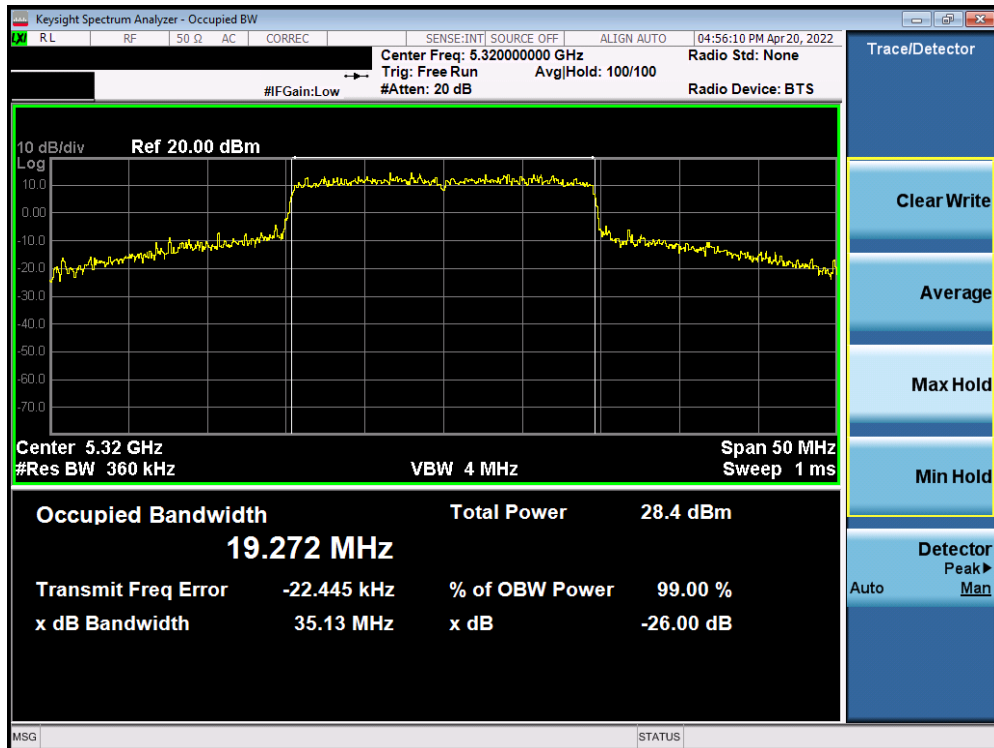


Plot 7-81. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 64)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 58 of 284

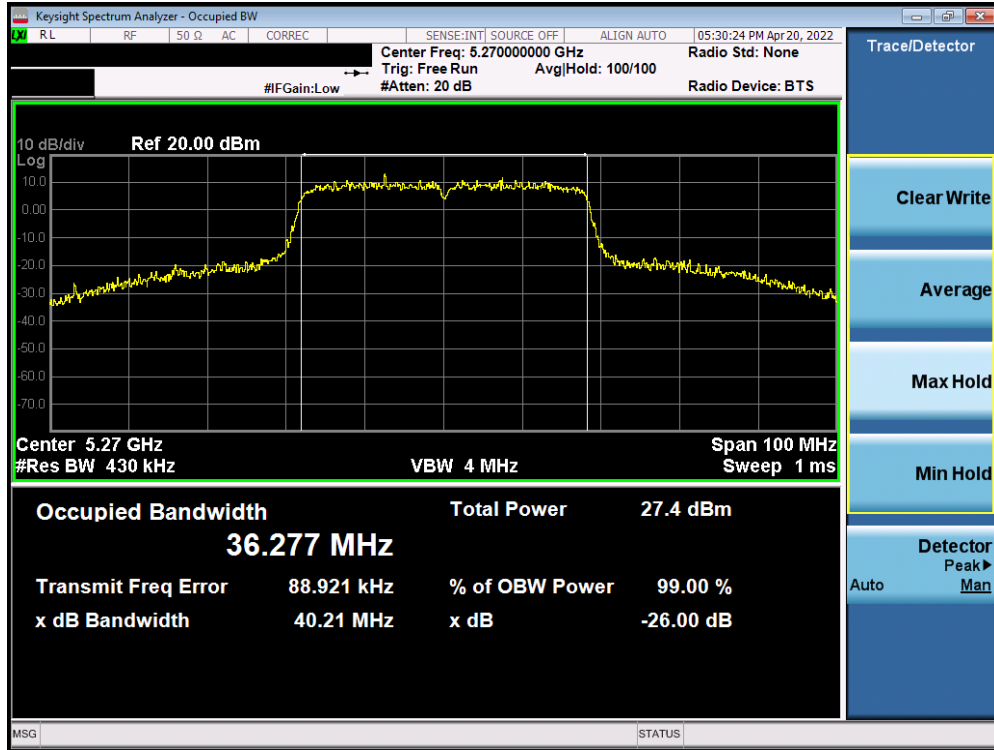


Plot 7-82. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

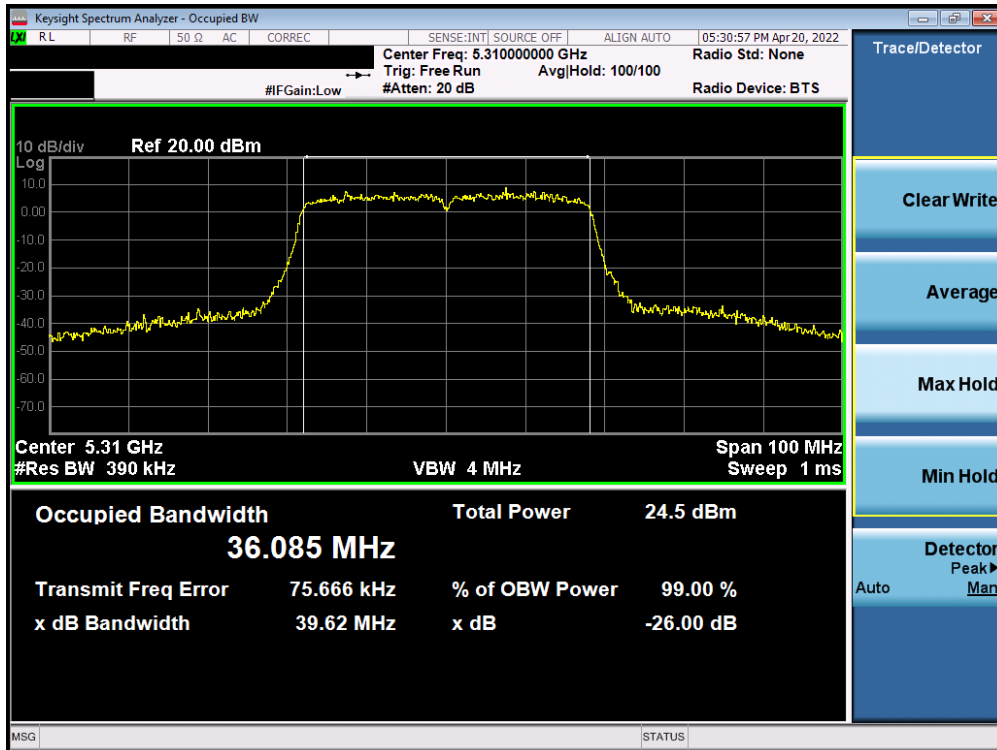


Plot 7-83. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 59 of 284

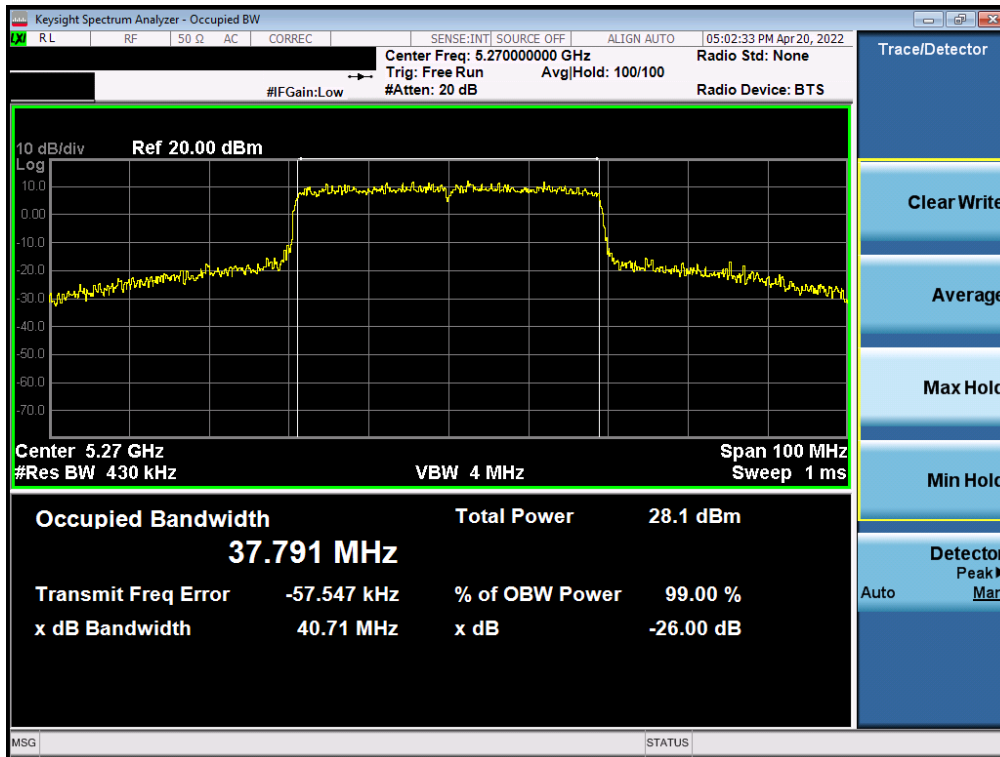

Plot 7-84. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 62)

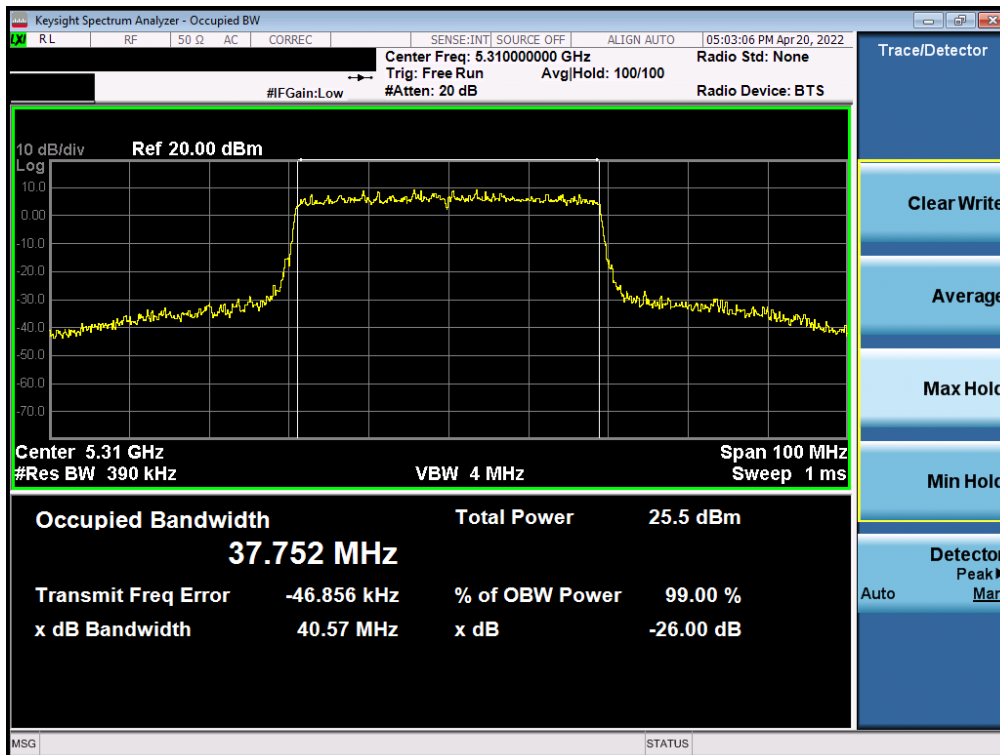

Plot 7-85. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 54)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-15-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 60 of 284