

**MEASUREMENT REPORT
FCC PART 15.247 WLAN****Applicant Name:**

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052
United States

Date of Testing:

3/14/2022-7/1/2022

Test Report Issue Date:

7/1/2022

Test Site/Location:

Element, Columbia, MD, USA

Test Report Serial No.:

1M2204040049-13-R1.C3K

FCC ID:

C3K1997

IC:

3048A-1997

APPLICANT:

Microsoft Corporation

Application Type:

Certification

Model/HVIN:

1997

EUT Type:

Portable Computing Device

Frequency Range:

2412 – 2472MHz

Modulation Type:

CCK/DSSS/OFDM

FCC Classification:

Digital Transmission System (DTS)

FCC Classification:

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2204040049-13-R1.C3K) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 1 of 164

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	8
2.4	Test Configuration.....	8
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s)/Modifications.....	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	AC Line Conducted Emissions	9
3.3	Radiated Emissions.....	10
3.4	Environmental Conditions.....	10
4.0	ANTENNA REQUIREMENTS.....	11
5.0	MEASUREMENT UNCERTAINTY	12
6.0	TEST EQUIPMENT CALIBRATION DATA	13
7.0	TEST RESULTS	14
7.1	Summary.....	14
7.2	6dB Bandwidth Measurement	15
7.3	Output Power Measurement.....	36
7.4	Power Spectral Density	43
7.5	Conducted Emissions at the Band Edge	66
7.6	Conducted Spurious Emissions.....	107
7.7	Radiated Spurious Emission Measurements – Above 1 GHz	115
7.7.1	SISO Antenna-1 Radiated Spurious Emission Measurements	118
7.7.2	SISO Antenna-2 Radiated Spurious Emission Measurements	122
7.7.3	CDD Radiated Spurious Emission Measurements.....	126
7.7.4	SISO Antenna-1 Radiated Restricted Band Edge Measurements	130
7.7.5	SISO Antenna-1 Radiated Restricted Band Edge Measurements 40MHz BW	134
7.7.6	SISO Antenna-2 Radiated Restricted Band Edge Measurements	139
7.7.7	SISO Antenna-2 Radiated Restricted Band Edge Measurements 40MHz	143
7.7.8	MIMO Radiated Restricted Band Edge Measurements.....	148
7.7.9	MIMO Radiated Restricted Band Edge Measurements 40MHz BW.....	152
7.8	Radiated Spurious Emissions Measurements – Below 1GHz	157
7.9	Line-Conducted Test Data.....	161
8.0	CONCLUSION	164

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 2 of 164

MEASUREMENT REPORT

Channel Bandwidth	Mode	Tx Frequency (MHz)	ANT1				ANT2				MIMO			
			Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
20MHz	802.11b	2412 - 2472	116.950	20.68	297.167	24.73	120.226	20.80	310.456	24.92	232.809	23.67	599.791	27.78
	802.11g	2412 - 2472	115.878	20.64	475.335	26.77	114.815	20.60	477.529	26.79	230.675	23.63	952.796	29.79
	802.11n	2412 - 2472	113.763	20.56	467.735	26.70	111.429	20.47	475.335	26.77	241.546	23.83	944.061	29.75
	802.11ax	2412 - 2472	114.025	20.57	498.884	26.98	112.720	20.52	495.450	26.95	226.986	23.56	993.116	29.97
40MHz	802.11n	2422-2462	66.527	18.23	342.768	25.35	77.983	18.92	359.749	25.56	144.544	21.60	703.072	28.47
	802.11ax	2422-2462	67.453	18.29	367.282	25.65	74.989	18.75	330.370	25.19	142.233	21.53	696.627	28.43

EUT Overview

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 3 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 4 of 164

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Microsoft Corporation Portable Computing Device FCC ID: C3K1997**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: H3220, HN220, JC220, JW220

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5,6GHz), Bluetooth (1x, EDR, LE)

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		ANT1	ANT2	MIMO
		Duty Cycle [%]	Duty Cycle [%]	Duty Cycle [%]
2.4GHz	b	99.7	99.9	99.9
	g	99.3	99.1	99.2
	n (HT20)	99.7	99.7	99.7
	ax (HE20)	99.7	99.7	99.7
	n (HT40)	99.7	99.7	99.7
	ax (HE40)	99.7	99.7	99.7

Table 2-2. Measured Duty Cycles

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 5 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✓	✓	✓	✓
	11g	✓	✓	✓	✓	✓	✓
	11n	✓	✓	✓	✓	✓	✓
	11ax	✓	✓	✓	✓	✓	✓

Table 2-3. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	11	120
Operating Frequency (MHz)	2462	5600
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-4. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Configuration 2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	11	120
Operating Frequency (MHz)	2462	5600
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-5. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 6 of 164

Configuration 3: ANT1 transmitting in 2.4GHz mode and ANT2 in 6GHz mode

Description	2.4 GHz Emission	6 GHz Emission
Antenna	1	2
Channel	11	2
Operating Frequency (MHz)	2462	5935
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-6. Config-3 (ANT1 2.4GHz & ANT2 6GHz)

Configuration 4: ANT1 transmitting in 6GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	6 GHz Emission
Antenna	2	1
Channel	11	2
Operating Frequency (MHz)	2462	5935
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-7. Config-4 (ANT1 6GHz & ANT2 2.4GHz)

Configuration 5: ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	11	120
Operating Frequency (MHz)	2462	5600
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-8. Config-5 (ANT1 MIMO & ANT2 MIMO)

Configuration 6: ANT1 and ANT2 both transmitting in 2.4GHz and 6GHz modes simultaneously

Description	2.4 GHz Emission	6 GHz Emission
Antenna	1, 2	1, 2
Channel	11	2
Operating Frequency (MHz)	2462	5935
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-9. Config-6 (ANT1 MIMO & ANT2 MIMO)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 7 of 164

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 1 Gain [dBi]	Antenna 2 Gain [dBi]	MIMO Gain [dBi]
2.4	1.40	1.60	4.51

Table 2-10. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of KDB 558074 D02 v01r04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

The device supports open and closed configurations. Multiple angles are tested and the worst case radiated emissions data is shown in the report.

2.5 Software and Firmware

The test was conducted with software/firmware version 1.426.0 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 8 of 164

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 9 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 10 of 164

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 11 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 12 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	12/19/2021	Annual	12/19/2022	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	12/19/2022	Annual	12/19/2022	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	12/19/2022	Annual	12/19/2022	WL40-1
-	ETS-001	EMC Cable and Switch System	12/9/2021	Annual	12/9/2022	ETS-001
-	ETS-002	EMC Cable and Switch System	3/10/2022	Annual	3/10/2023	ETS-002
-	AP1-002	EMC Cable and Switch System	3/9/2022	Annual	3/9/2023	AP1-002
-	AP2-001	EMC Cable and Switch System	1/4/2022	Annual	1/4/2023	AP2-001
-	AP2-002	EMC Cable and Switch System	3/11/2022	Annual	3/11/2023	AP2-002
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Agilent	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/21/2022	MY49430494
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2022	9203-2178
ETS-Lindgren	3117	Horn Antenna (1 - 18GHz)	4/20/2021	Biennial	4/20/2023	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	7/9/2020	Biennial	7/9/2022	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	2/14/2022	Annual	2/14/2023	MY54490576
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-44GHz)	2/14/2022	Annual	2/14/2023	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	12/19/2021	Annual	12/19/2022	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/25/2021	Annual	7/25/2022	100348
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 13 of 164

7.0 TEST RESULTS

7.1 Summary

Company Name: Microsoft Corporation

FCC ID: C3K1997

IC: 3048A-1997

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “WLAN Automation,” Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 1.3.1.

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 14 of 164

7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 15 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Antenna-1 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	7.168	0.500
2437	6	b	1	7.182	0.500
2462	11	b	1	7.618	0.500
2412	1	g	6	16.33	0.500
2437	6	g	6	16.08	0.500
2462	11	g	6	16.08	0.500
2412	1	n (20MHz)	6.5/7.2 (MCS0)	17.30	0.500
2437	6	n (20MHz)	6.5/7.2 (MCS0)	17.59	0.500
2462	11	n (20MHz)	6.5/7.2 (MCS0)	16.57	0.500
2412	1	ax (20MHz)	8/8.6 (MCS0)	18.65	0.500
2437	6	ax (20MHz)	8/8.6 (MCS0)	18.56	0.500
2462	11	ax (20MHz)	8/8.6 (MCS0)	18.93	0.500
2422	3	n (40MHz)	13/14.4 (MCS0)	35.98	0.500
2442	7	n (40MHz)	13/14.4 (MCS0)	36.32	0.500
2462	11	n (40MHz)	13/14.4 (MCS0)	36.08	0.500
2422	3	ax (40MHz)	16/17.2 (MCS0)	37.62	0.500
2442	7	ax (40MHz)	16/17.2 (MCS0)	36.83	0.500
2462	11	ax (40MHz)	16/17.2 (MCS0)	36.53	0.500

Table 7-2. Conducted Bandwidth Measurements SISO ANT1


FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 16 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

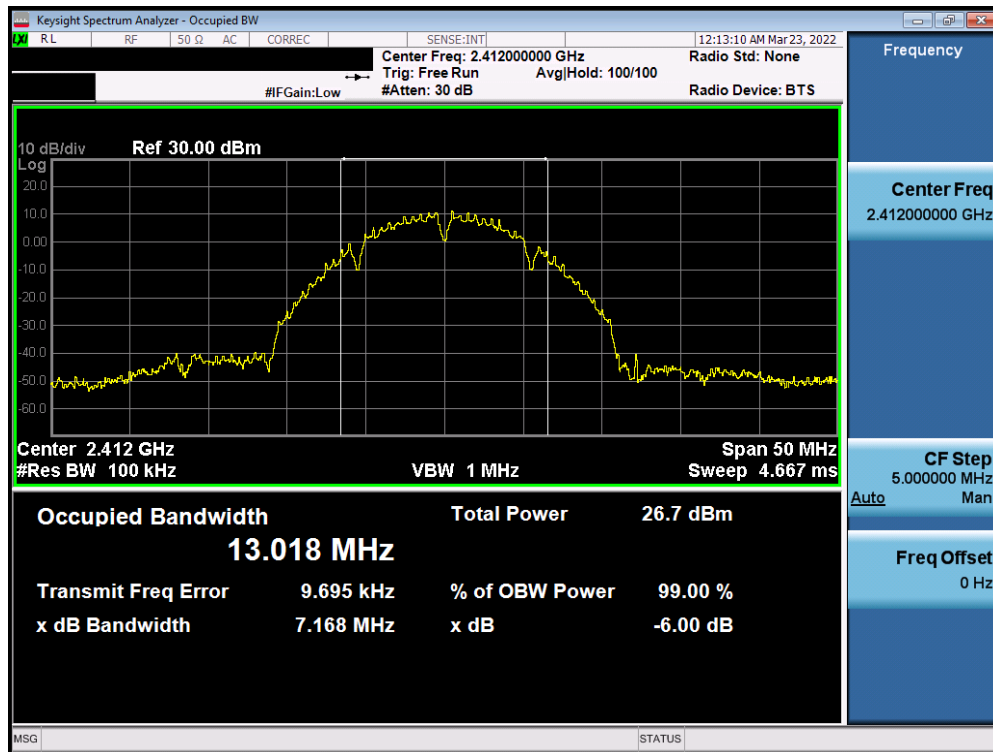


Plot 7-1. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 1)

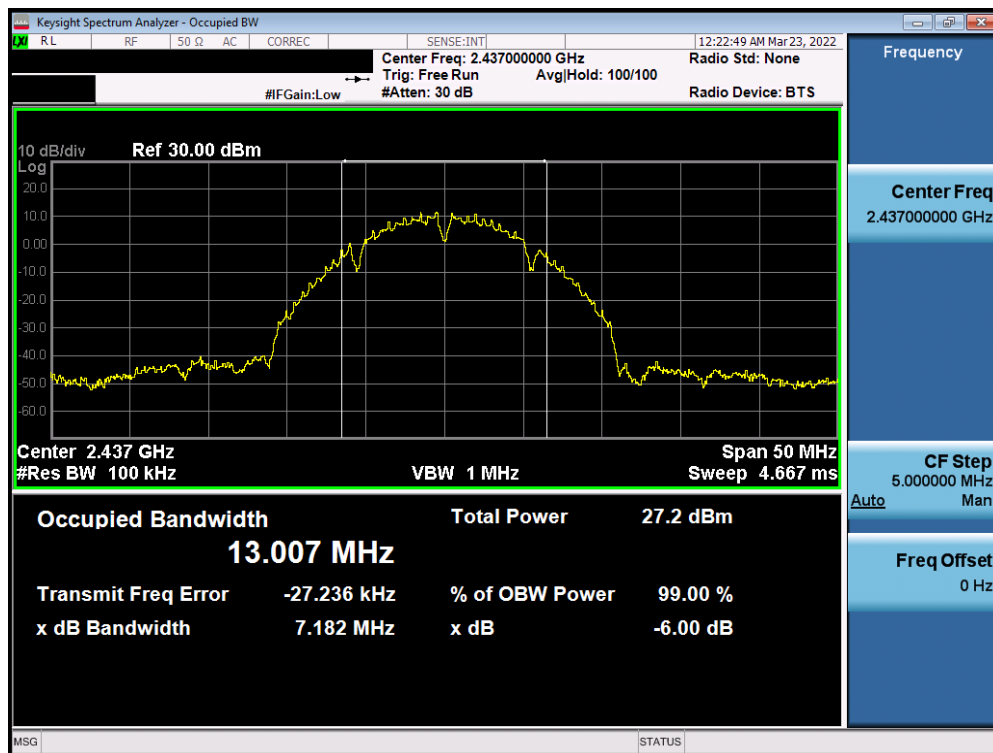


Plot 7-2. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 17 of 164

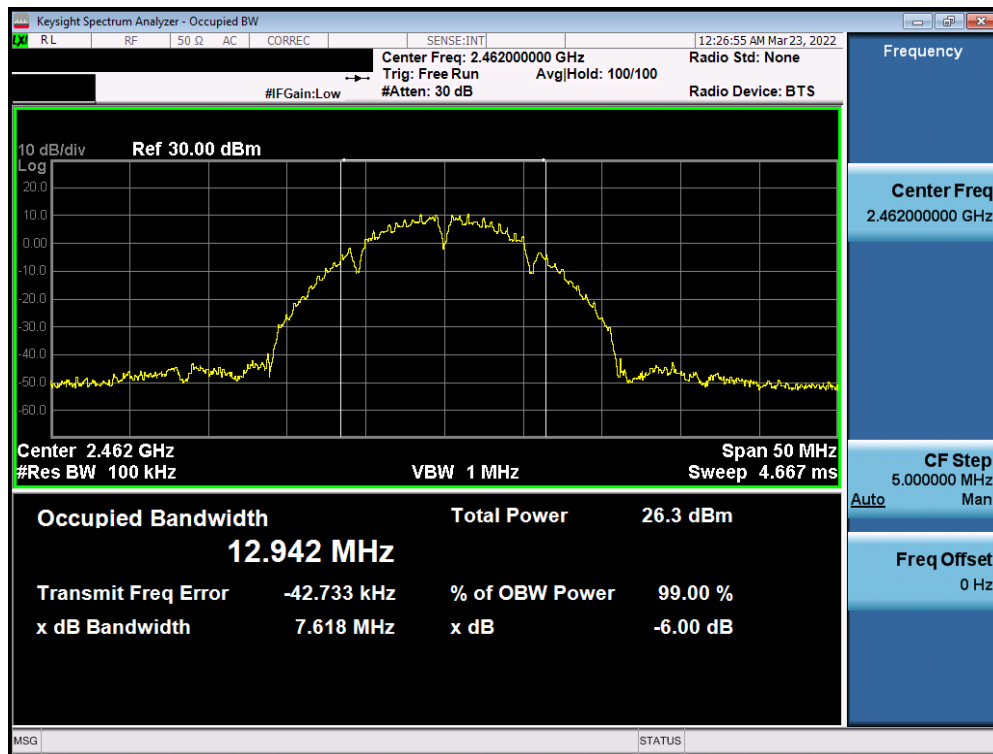


Plot 7-3. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 11)

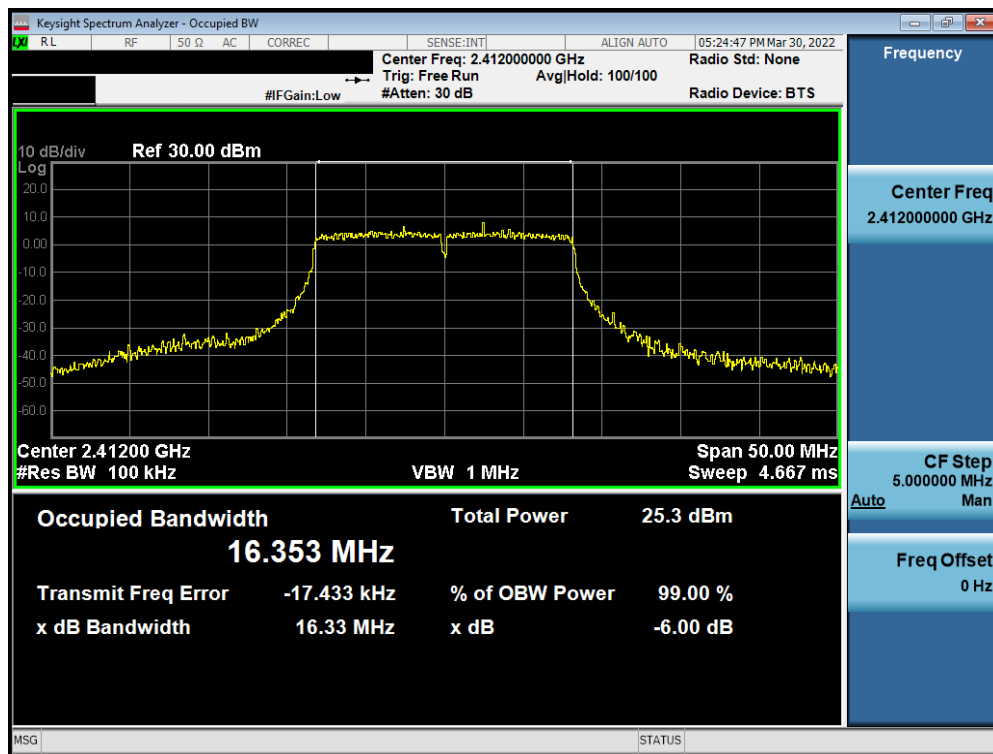


Plot 7-4. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 18 of 164

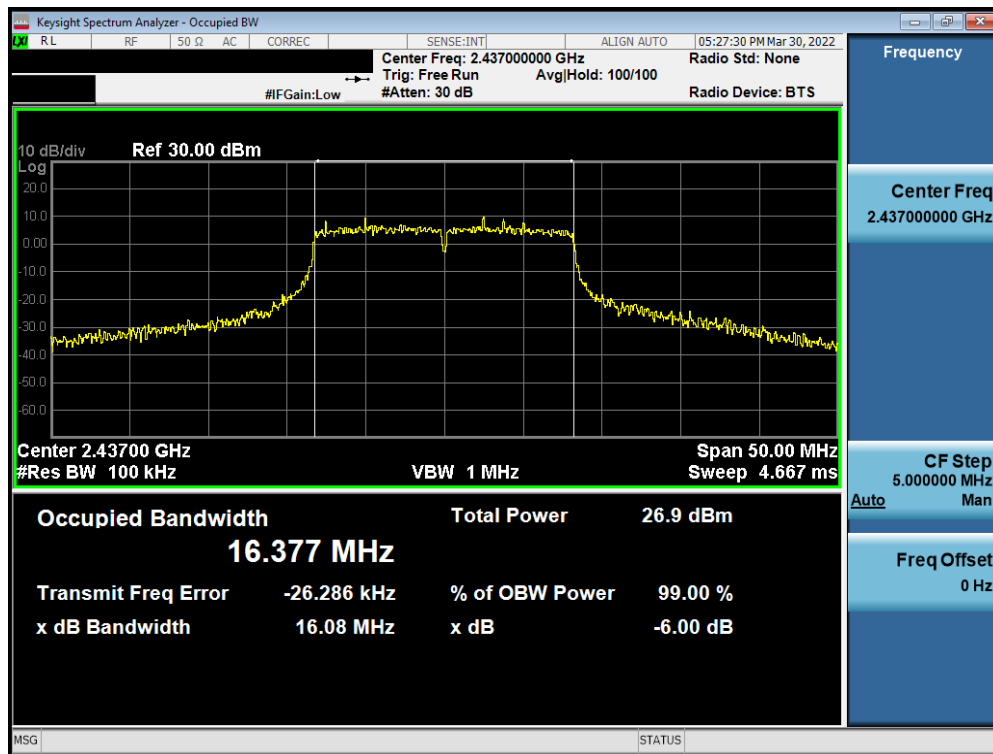


Plot 7-5. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 6)

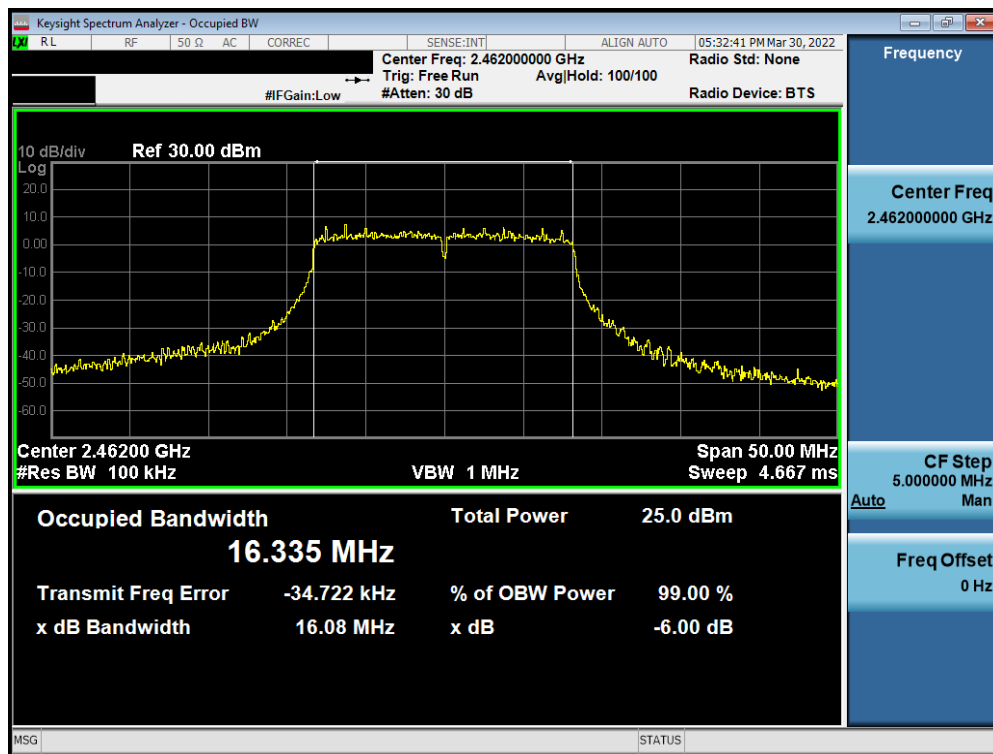


Plot 7-6. 6dB Bandwidth Plot SISO ANT1 (802.11g – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 19 of 164

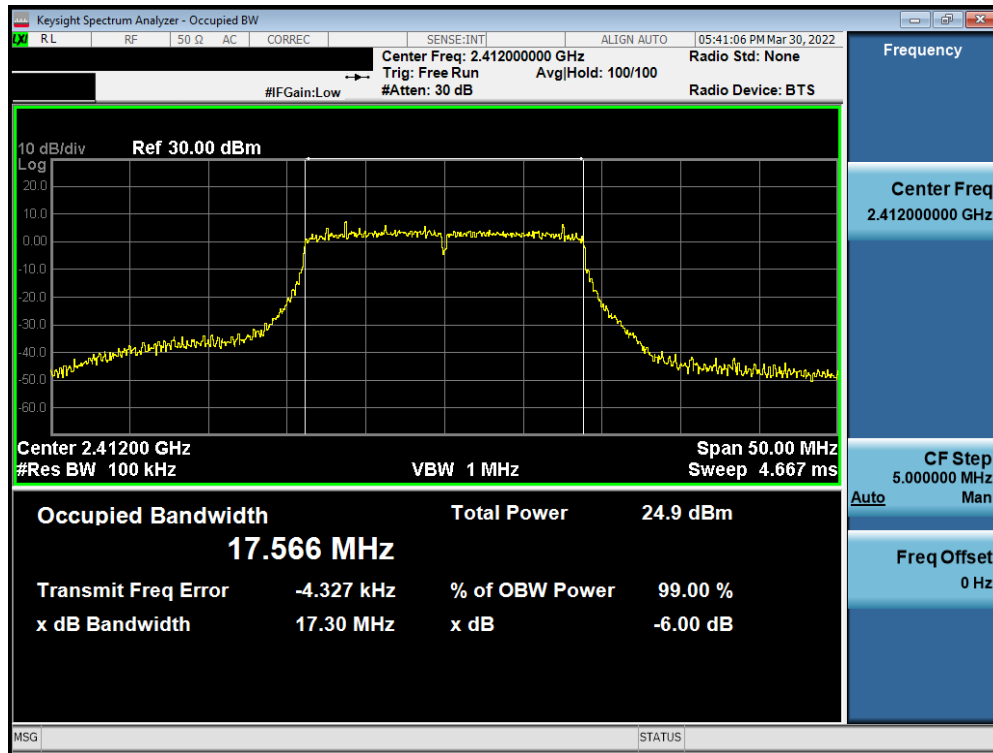


Plot 7-7. 6dB Bandwidth Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 1)

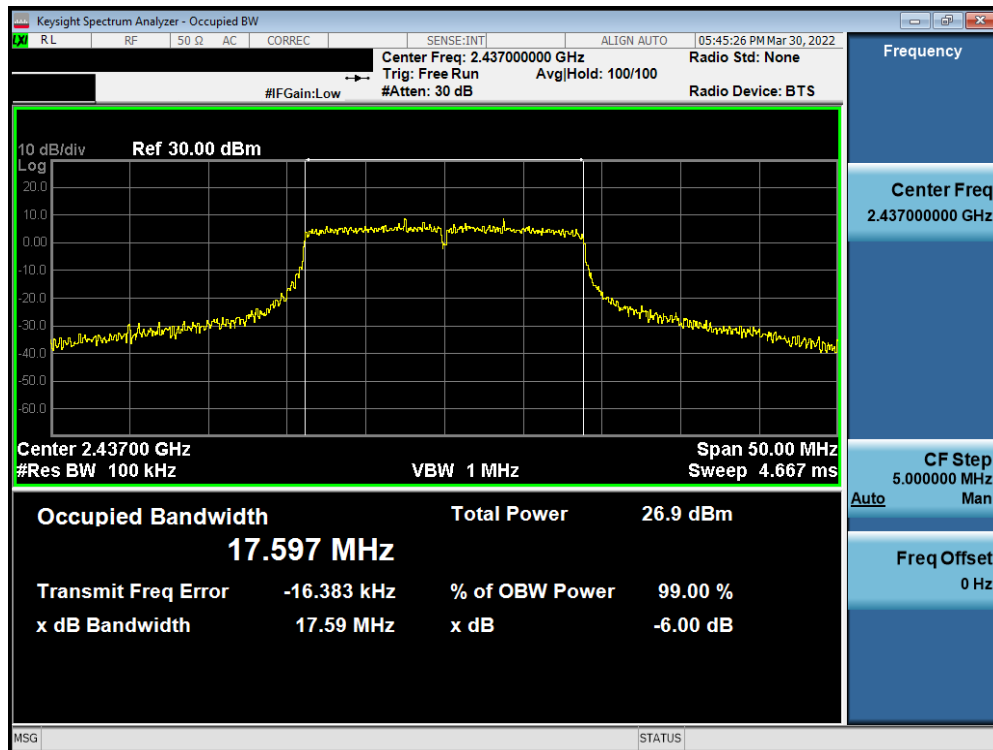


Plot 7-8. 6dB Bandwidth Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 6)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 20 of 164

V9.0 02/01/2019

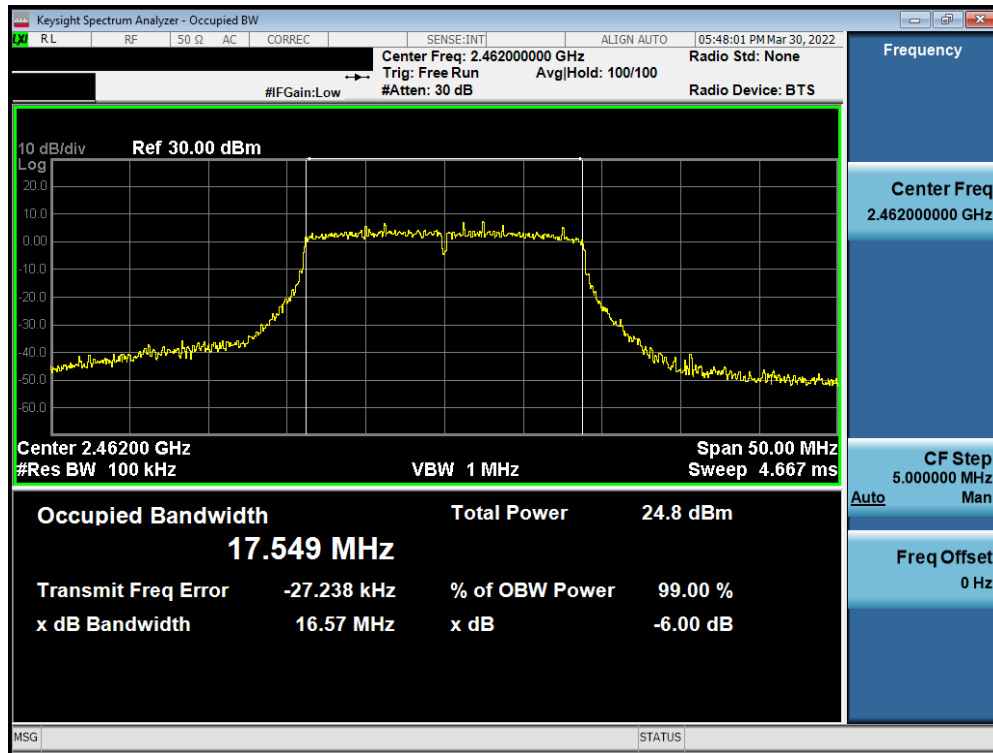

Plot 7-9. 6dB Bandwidth Plot SISO ANT1 20MHz(802.11n (2.4GHz) – Ch. 11)

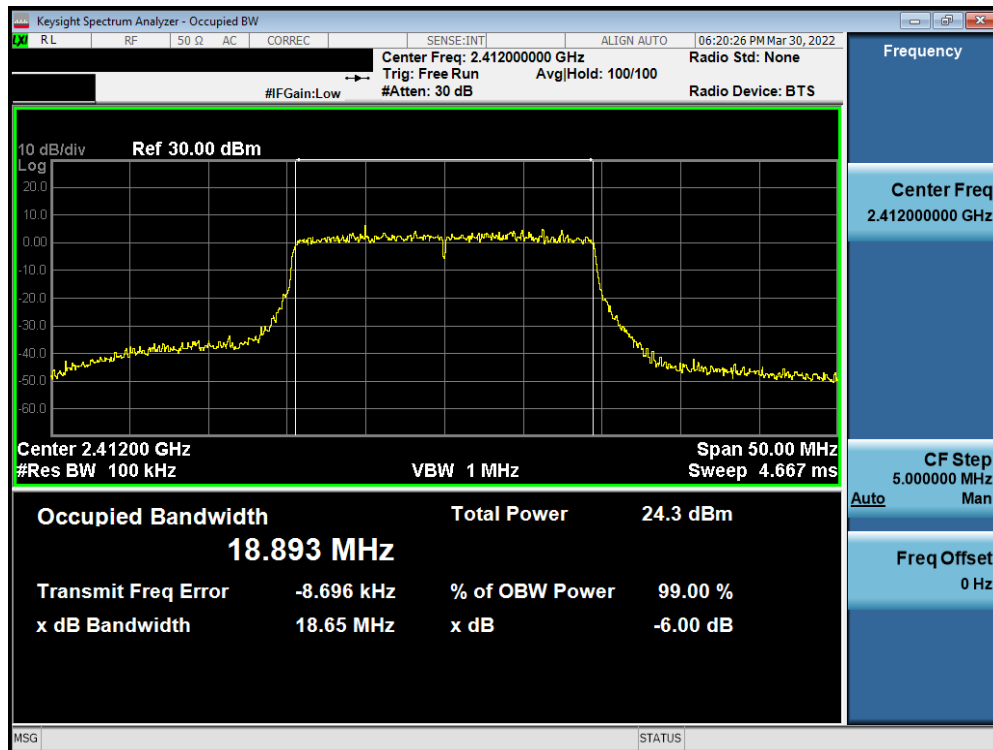


Plot 7-10. 6dB Bandwidth Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 1)


FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 21 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

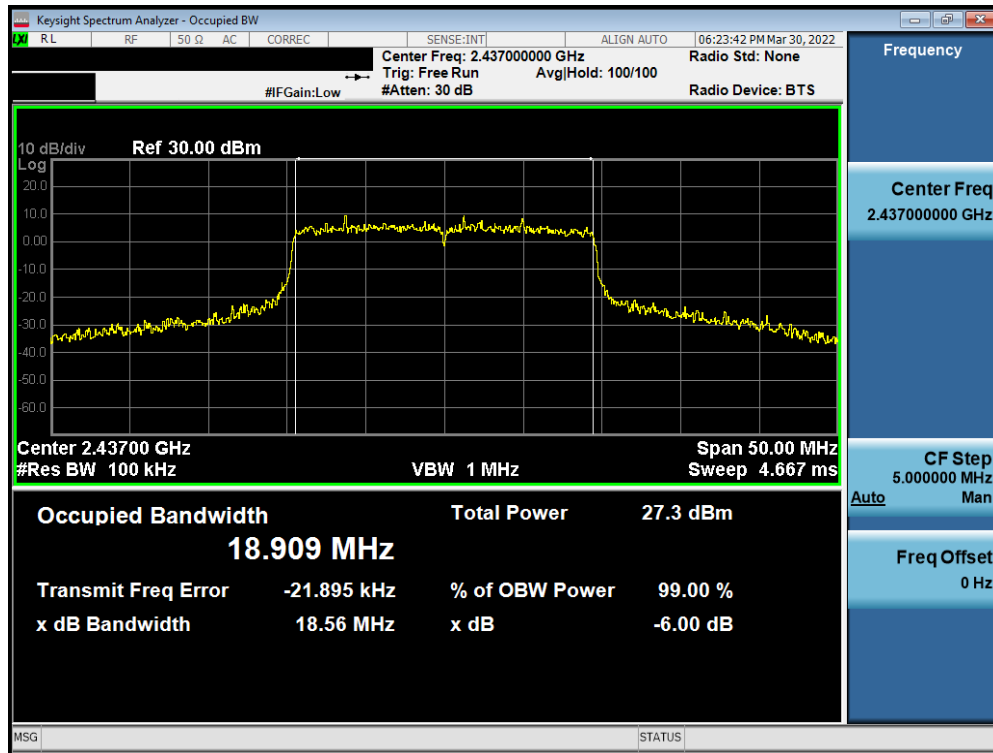


Plot 7-11. 6dB Bandwidth Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 6)

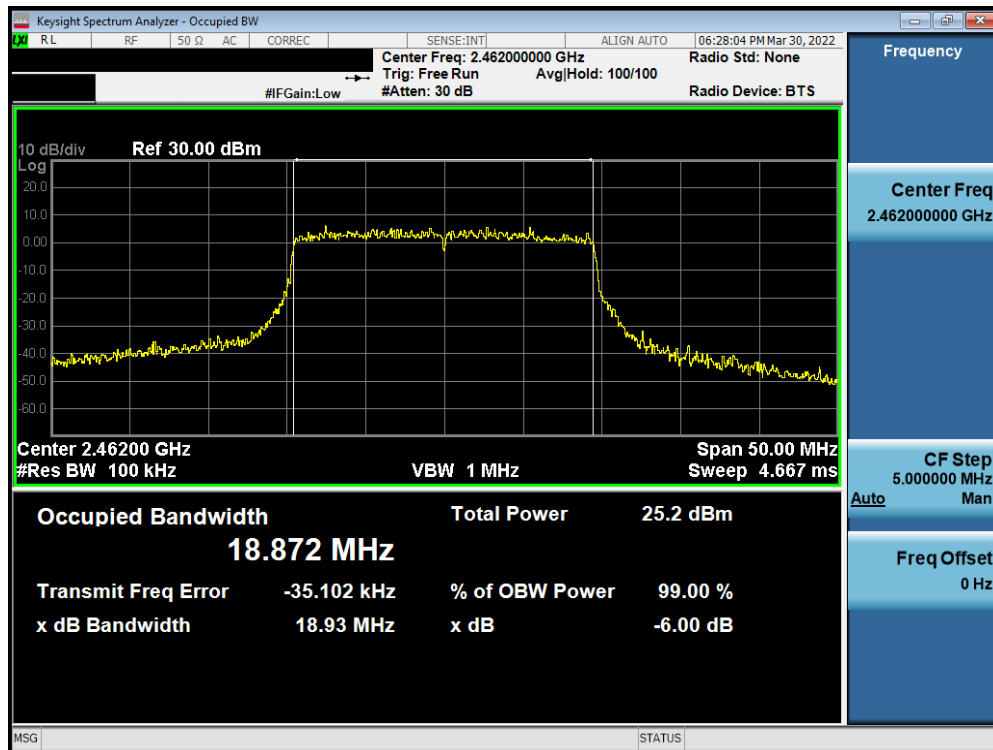


Plot 7-12. 6dB Bandwidth Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 22 of 164

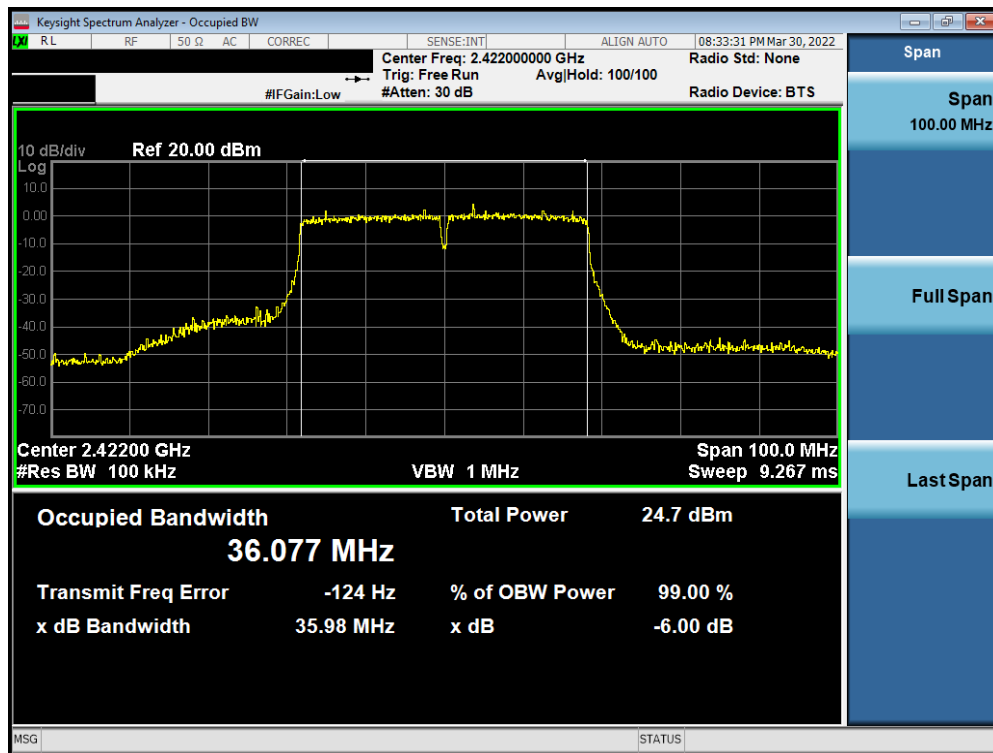


Plot 7-13. 6dB Bandwidth Plot SISO ANT1 (802.11n 40MHz) (2.4GHz) – Ch. 3)

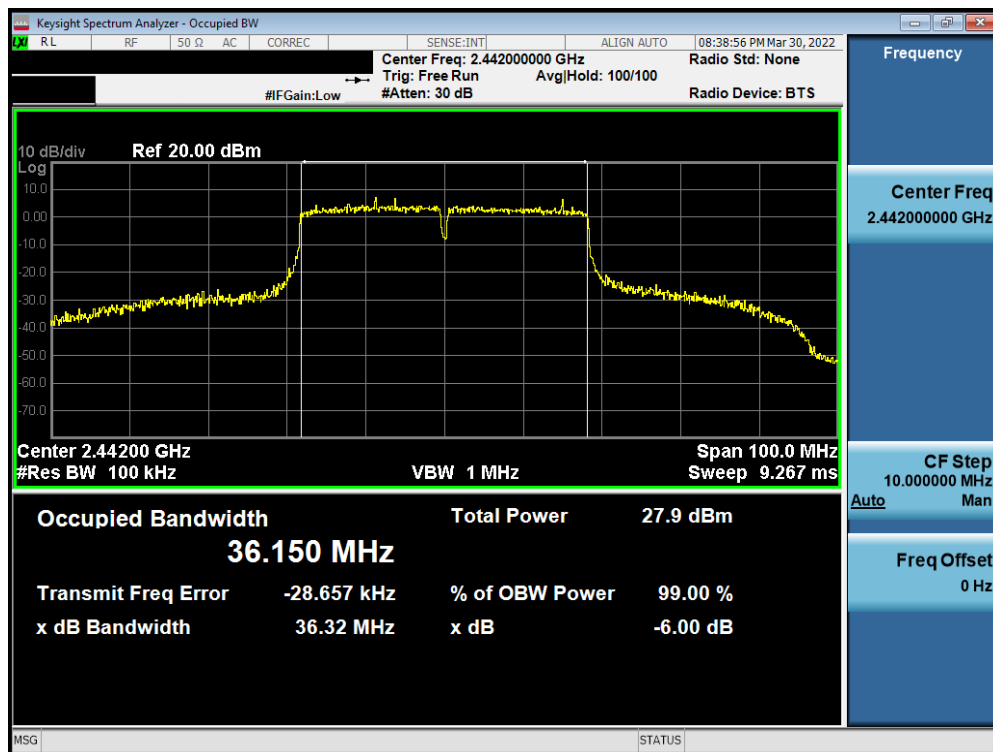


Plot 7-14. 6dB Bandwidth Plot SISO ANT1 (802.11n 40MHz) (2.4GHz) – Ch. 7)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 23 of 164

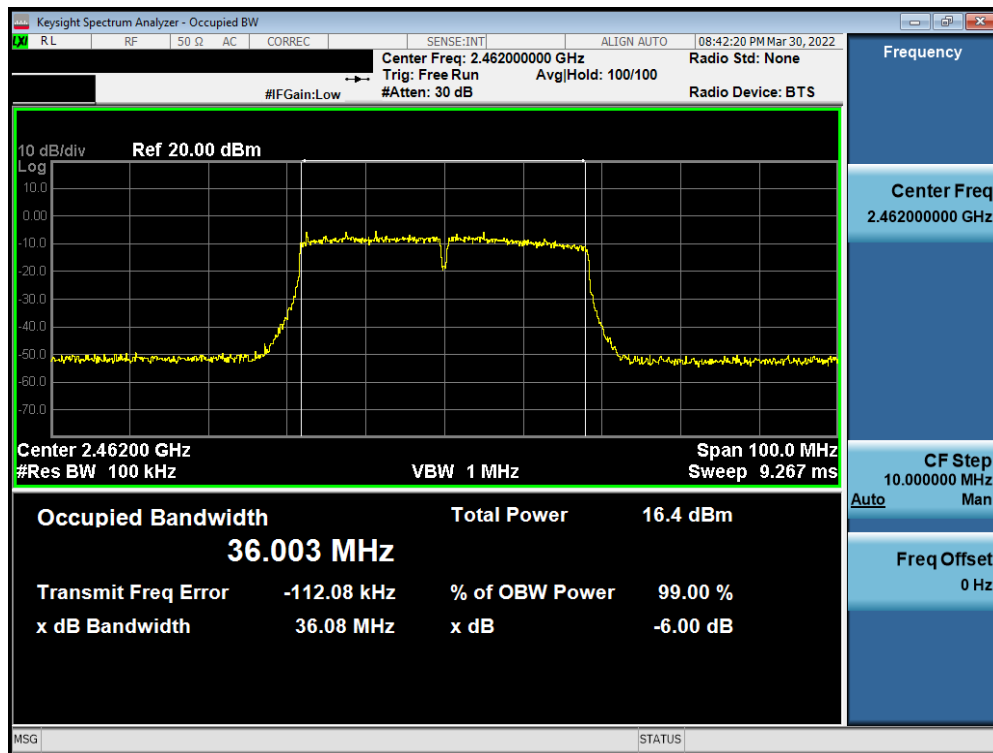


Plot 7-15. 6dB Bandwidth Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 11)

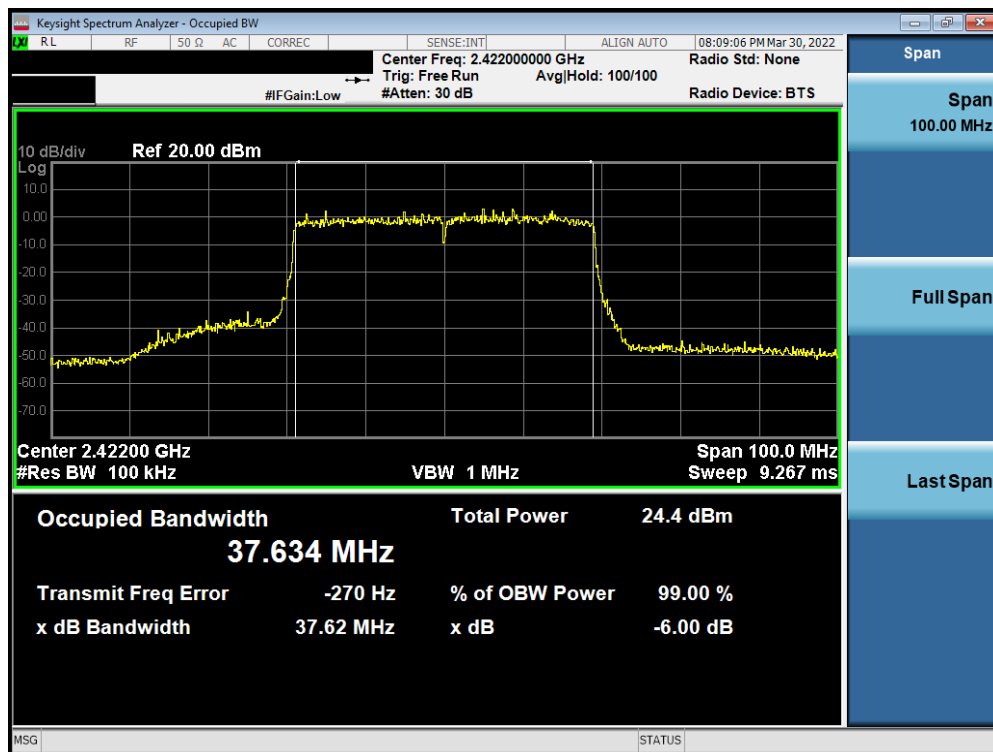


Plot 7-16. 6dB Bandwidth Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 3)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 24 of 164

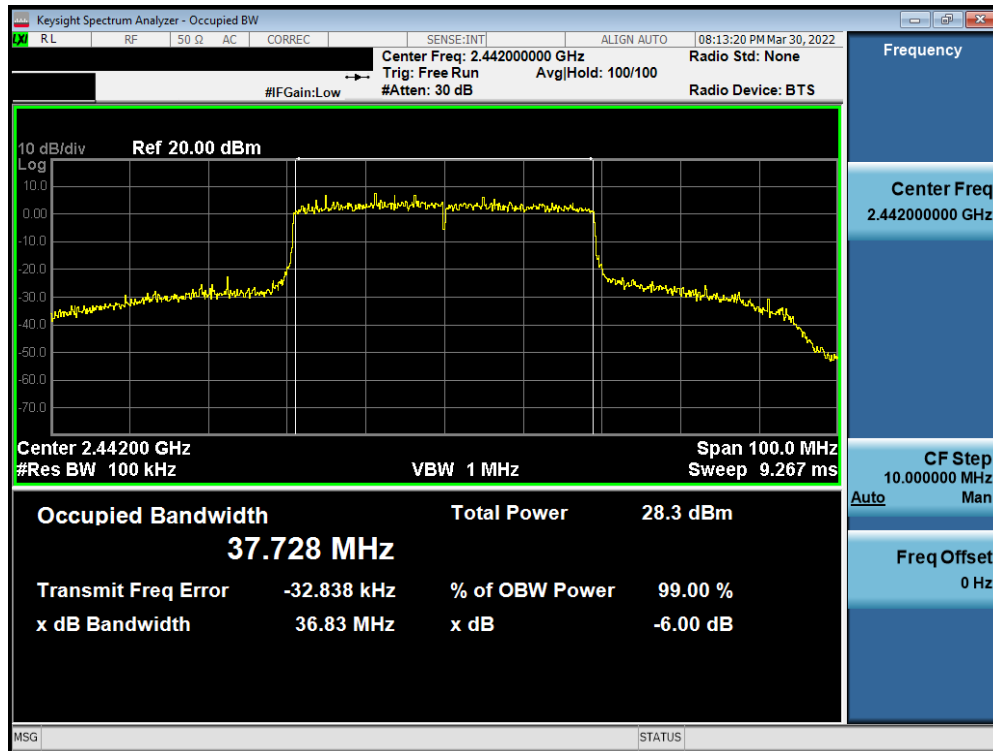

Plot 7-17. 6dB Bandwidth Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 7)

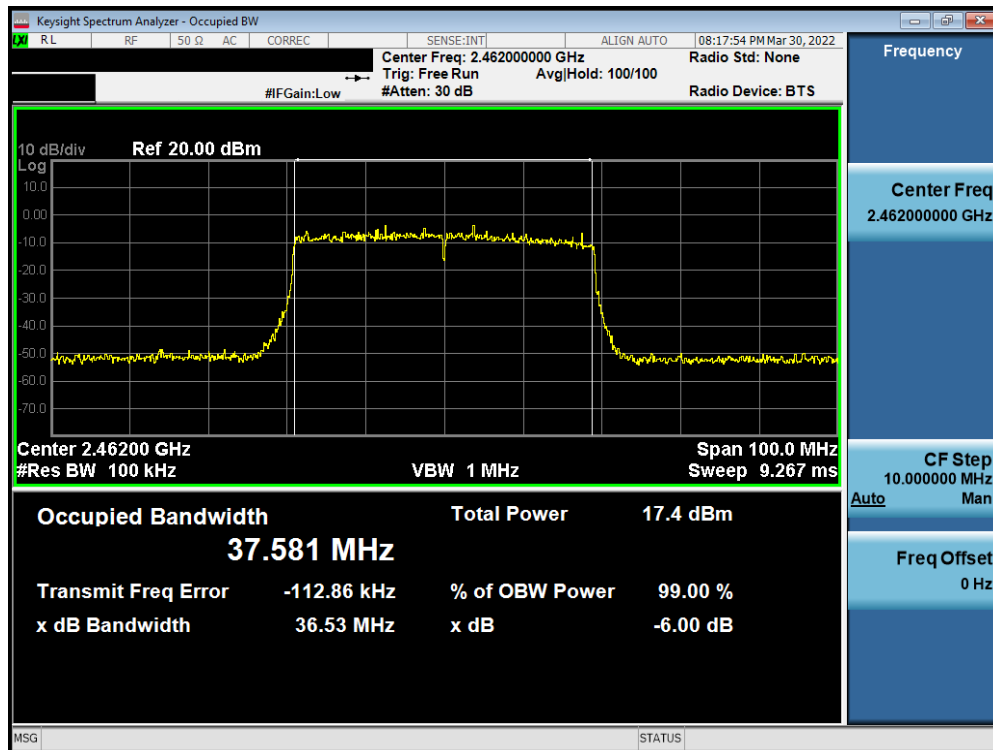

Plot 7-18. 6dB Bandwidth Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 11)


FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 25 of 164

SISO Antenna-2 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	8.100	0.500
2437	6	b	1	8.066	0.500
2462	11	b	1	8.037	0.500
2412	1	g	6	16.36	0.500
2437	6	g	6	16.29	0.500
2462	11	g	6	16.36	0.500
2412	1	n (20MHz)	6.5/7.2 (MCS0)	17.58	0.500
2437	6	n (20MHz)	6.5/7.2 (MCS0)	17.23	0.500
2462	11	n (20MHz)	6.5/7.2 (MCS0)	17.26	0.500
2412	1	ax (20MHz)	8/8.6 (MCS0)	18.84	0.500
2437	6	ax (20MHz)	8/8.6 (MCS0)	18.79	0.500
2462	11	ax (20MHz)	8/8.6 (MCS0)	18.79	0.500
2422	3	n (40MHz)	13/14.4 (MCS0)	36.47	0.500
2442	7	n (40MHz)	13/14.4 (MCS0)	35.05	0.500
2462	11	n (40MHz)	13/14.4 (MCS0)	35.48	0.500
2422	3	ax (40MHz)	16/17.2 (MCS0)	37.81	0.500
2442	7	ax (40MHz)	16/17.2 (MCS0)	36.35	0.500
2462	11	ax (40MHz)	16/17.2 (MCS0)	37.58	0.500

Table 7-3. Conducted Bandwidth Measurements SISO ANT2

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 26 of 164

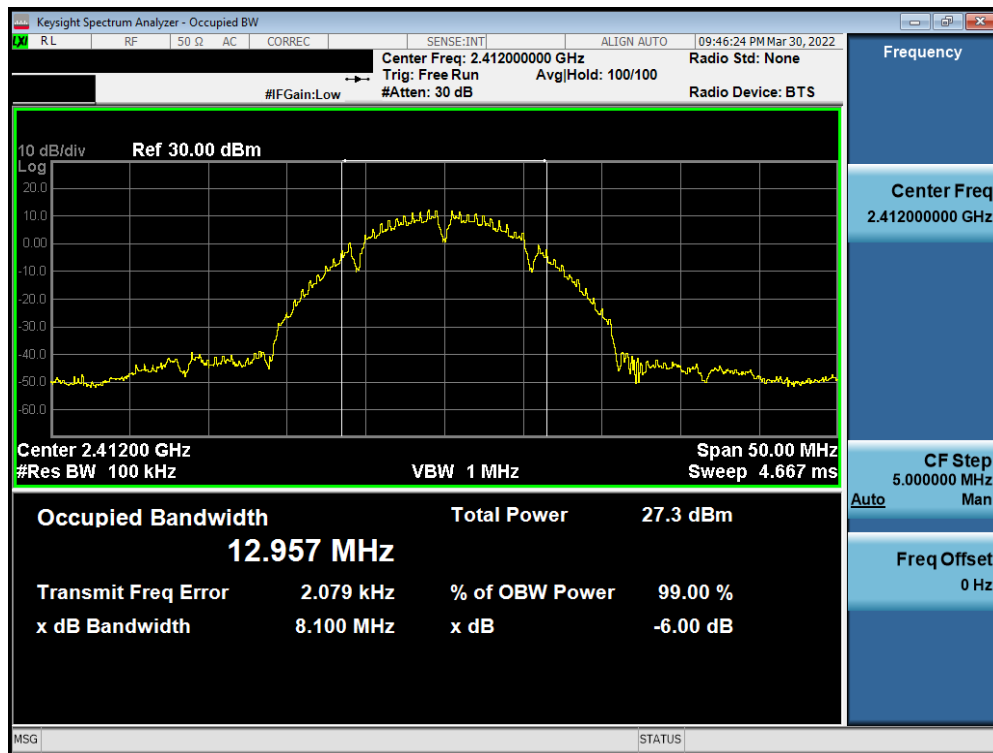


Plot 7-19. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 1)

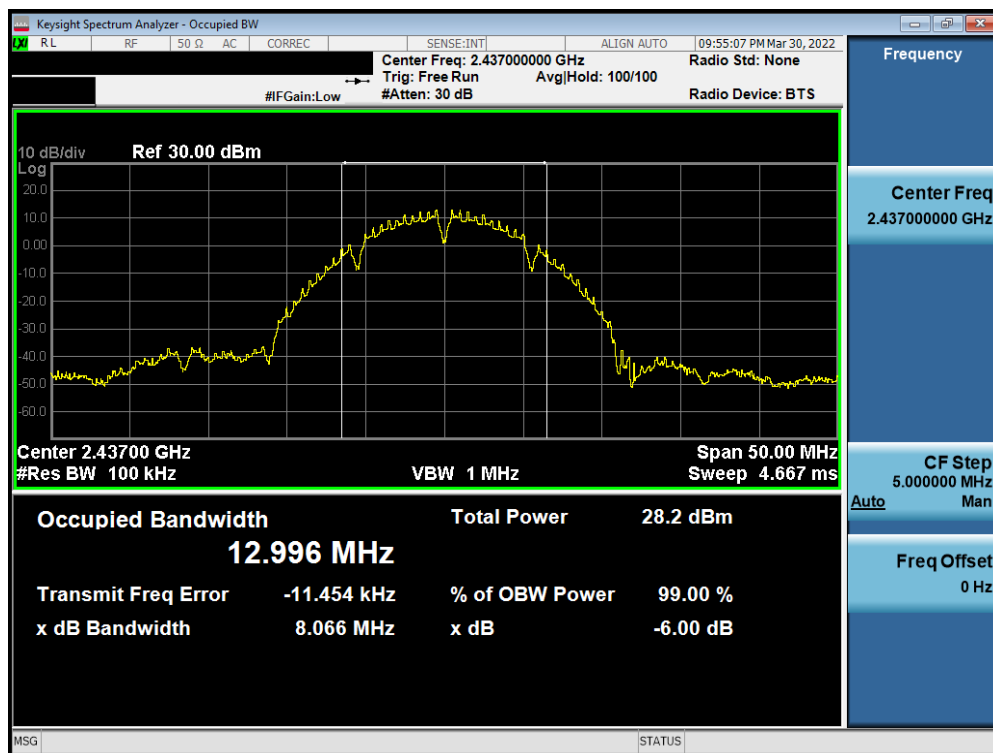


Plot 7-20. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 27 of 164

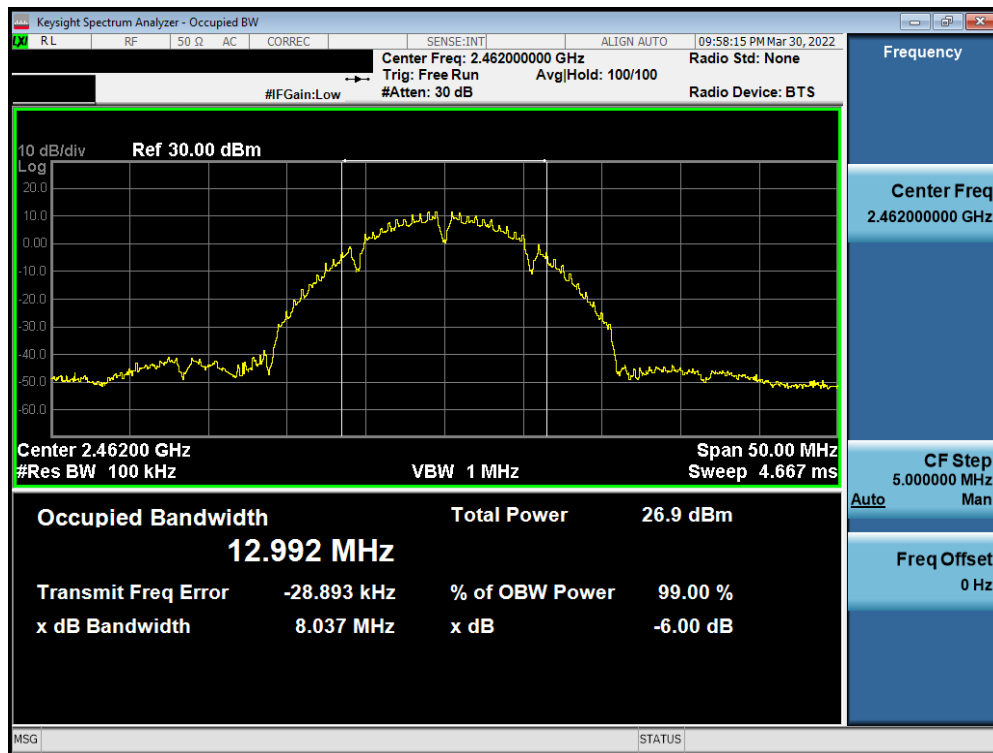


Plot 7-21. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 11)

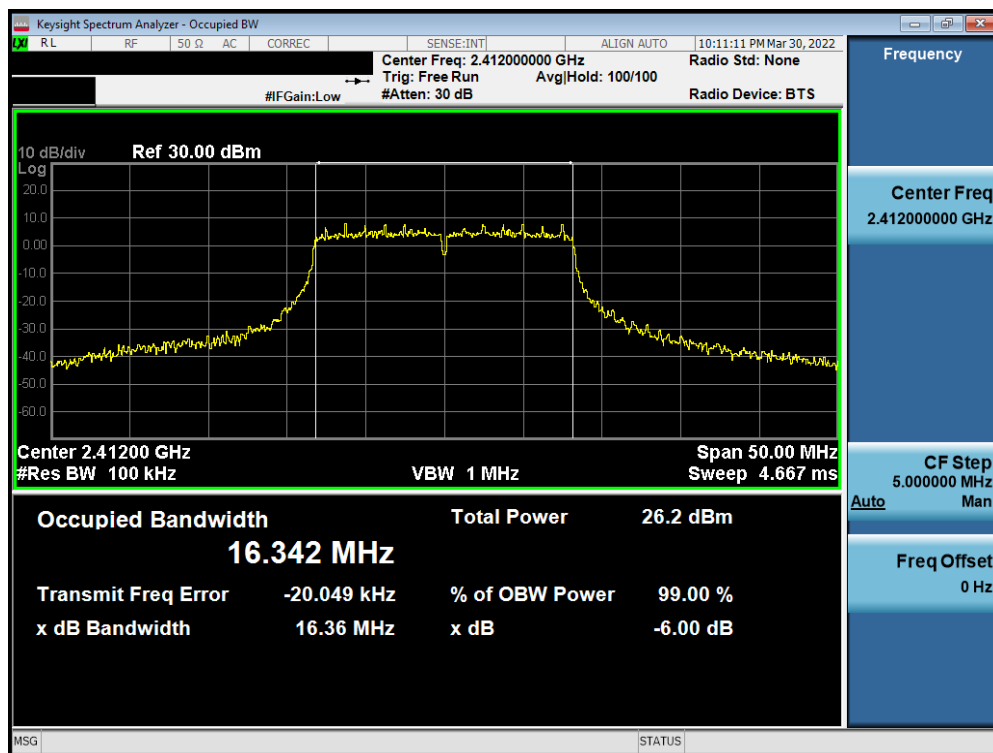


Plot 7-22. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 28 of 164

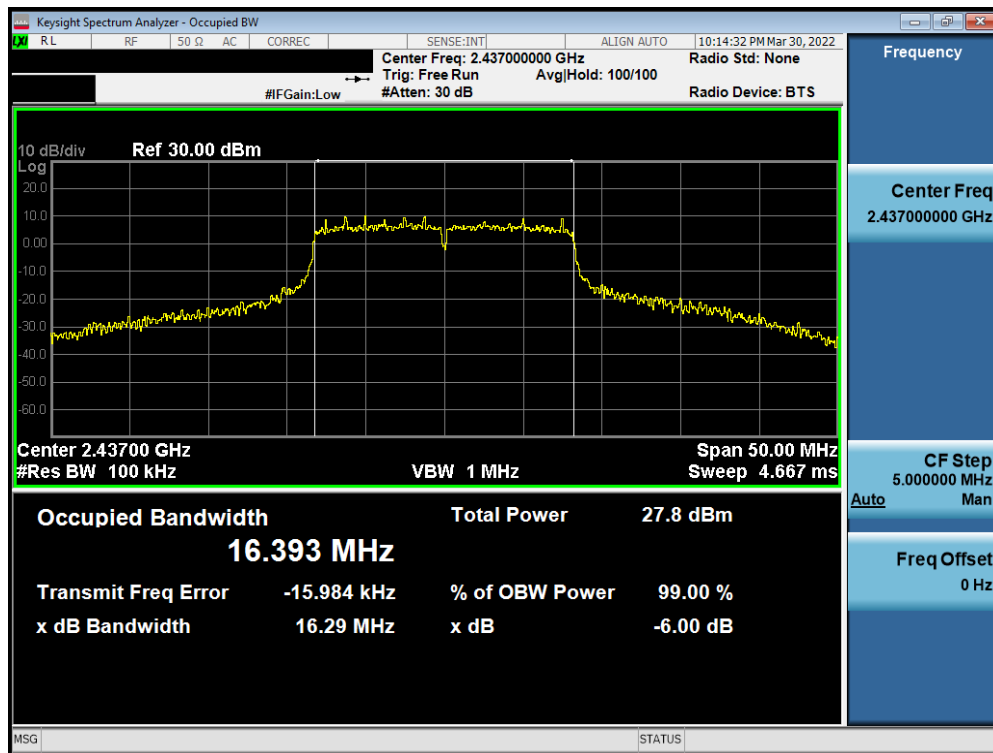


Plot 7-23. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 6)

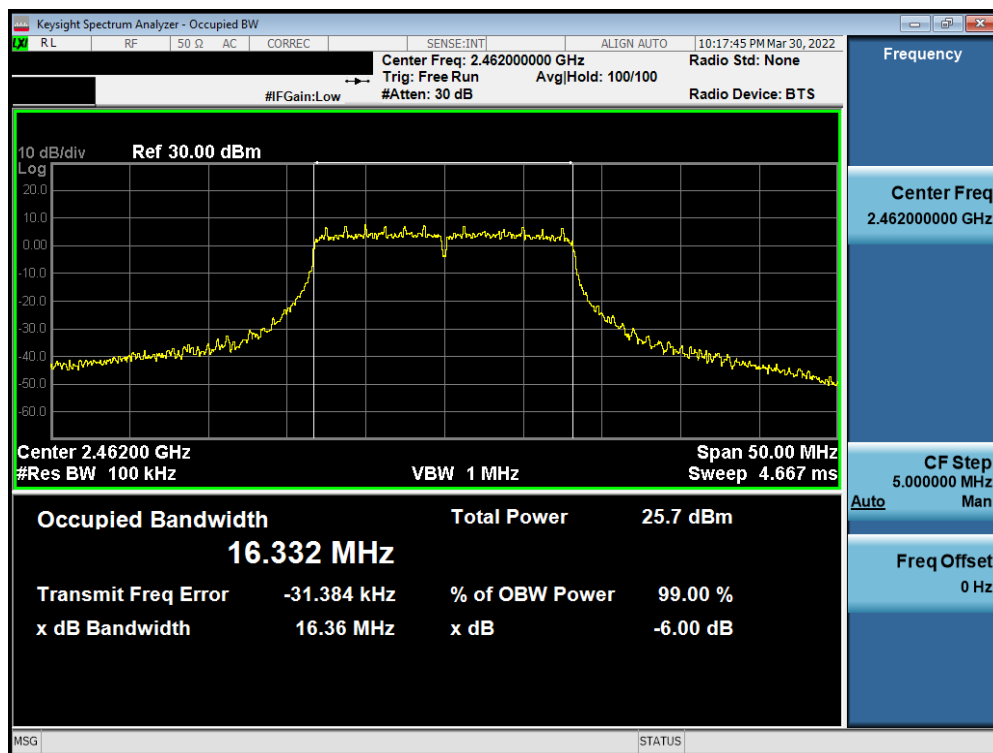


Plot 7-24. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 29 of 164

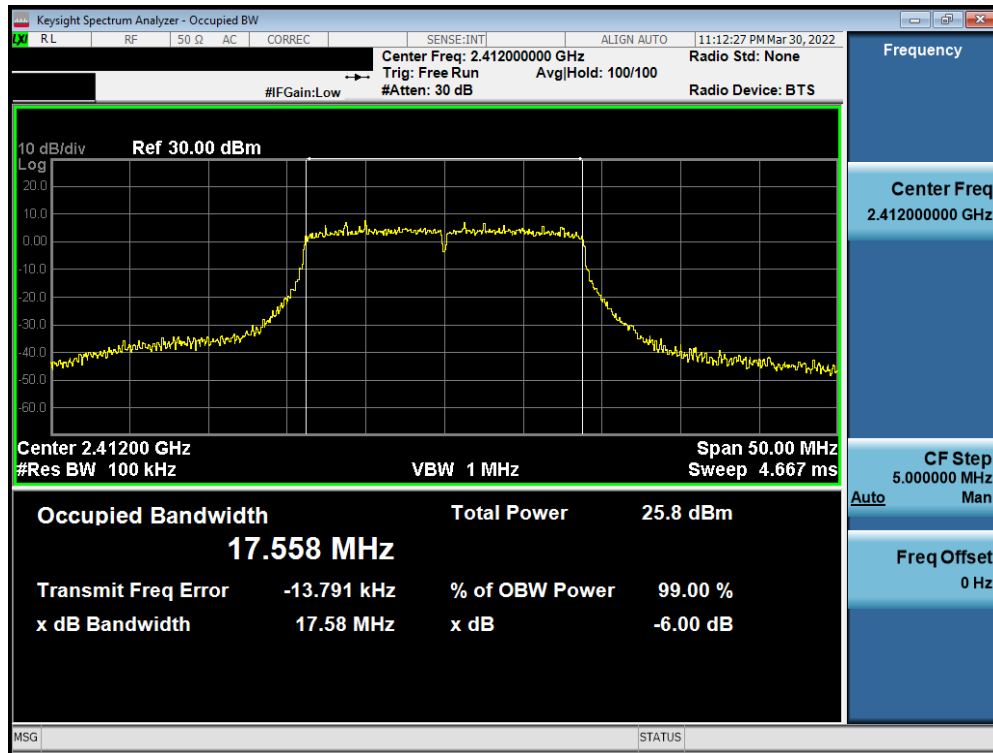


Plot 7-25. 6dB Bandwidth Plot SISO ANT2 (802.11n 20MHz) (2.4GHz) – Ch. 1)

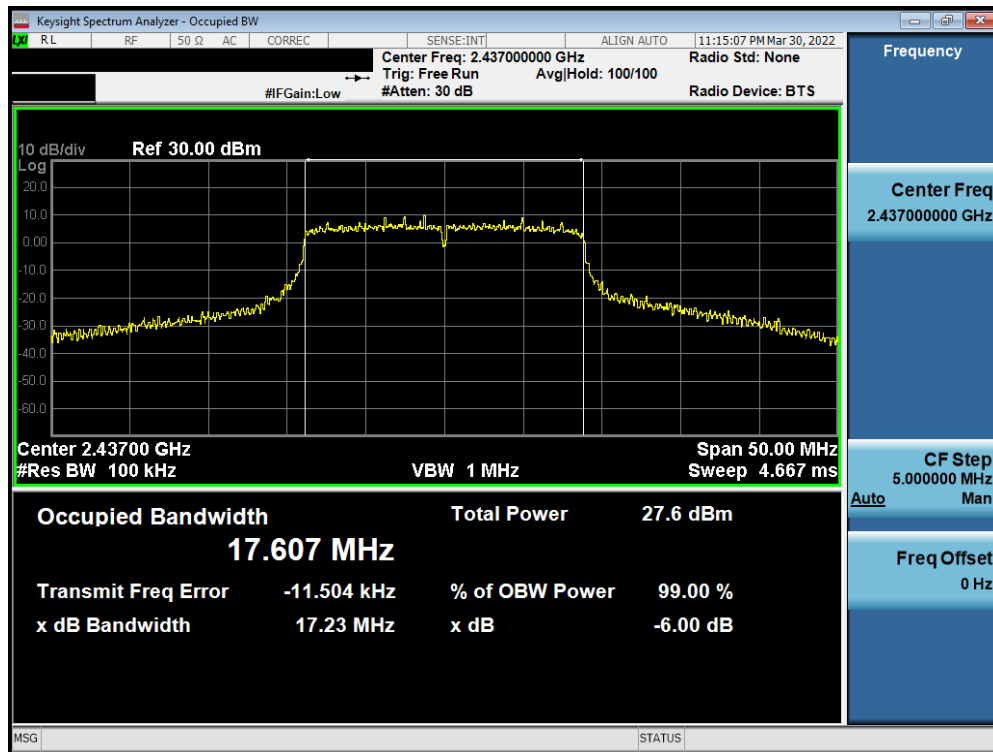


Plot 7-26. 6dB Bandwidth Plot SISO ANT2 (802.11n 20MHz) (2.4GHz) – Ch. 6)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 30 of 164

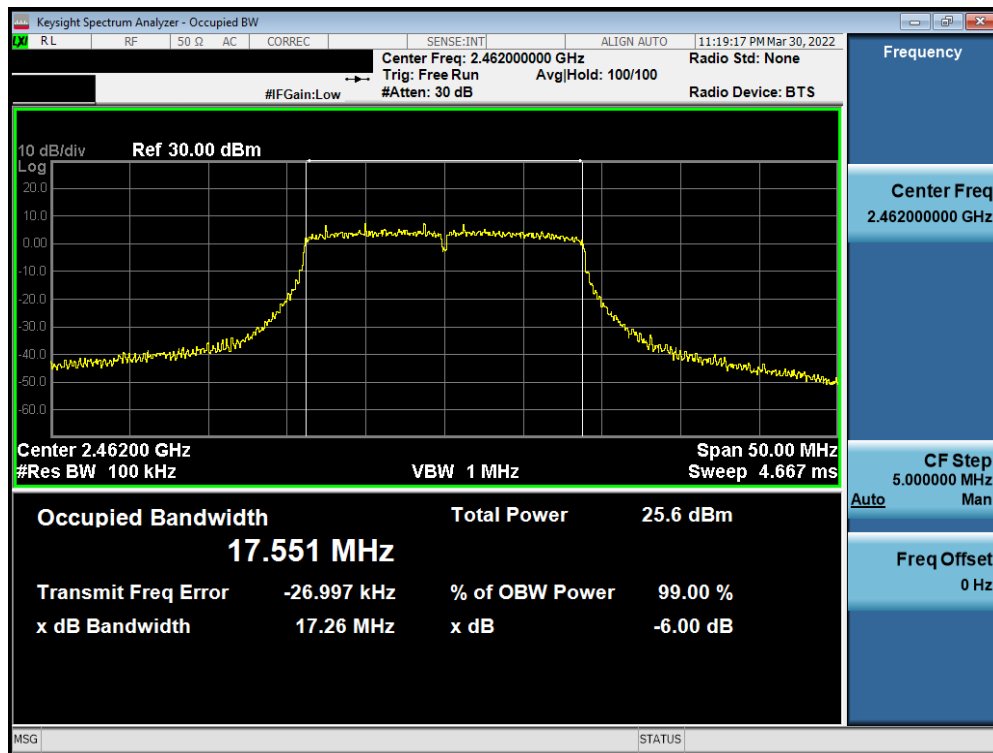


Plot 7-27. 6dB Bandwidth Plot SISO ANT2 (802.11n 20MHz (2.4GHz) – Ch. 11)

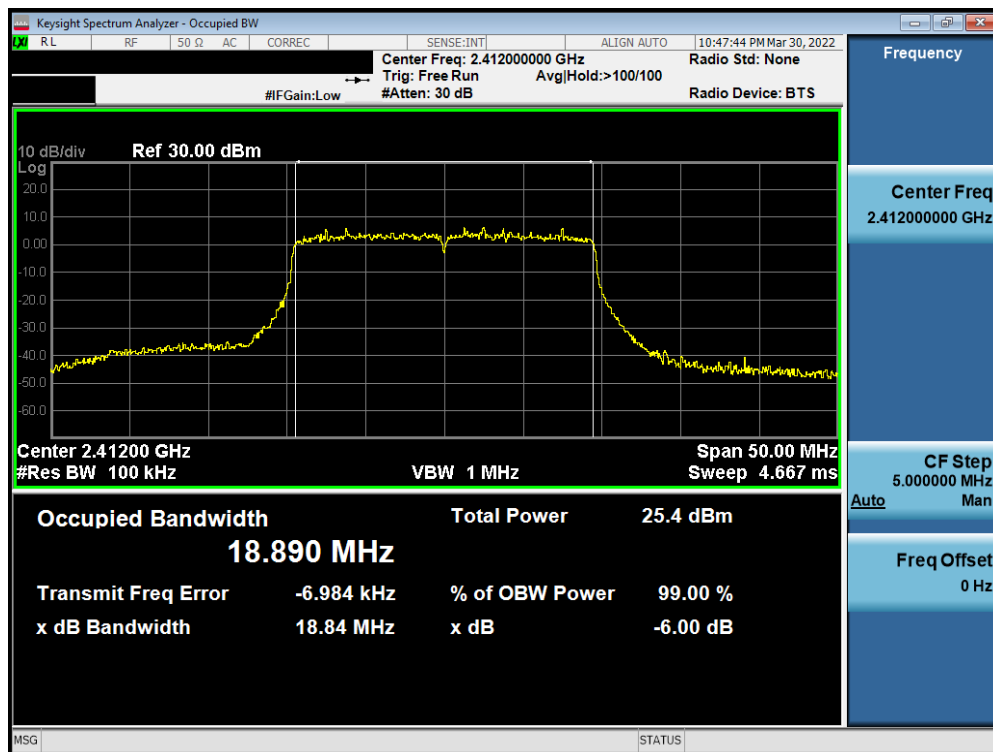


Plot 7-28. 6dB Bandwidth Plot SISO ANT2 (802.11ax 20MHz (2.4GHz) – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 31 of 164

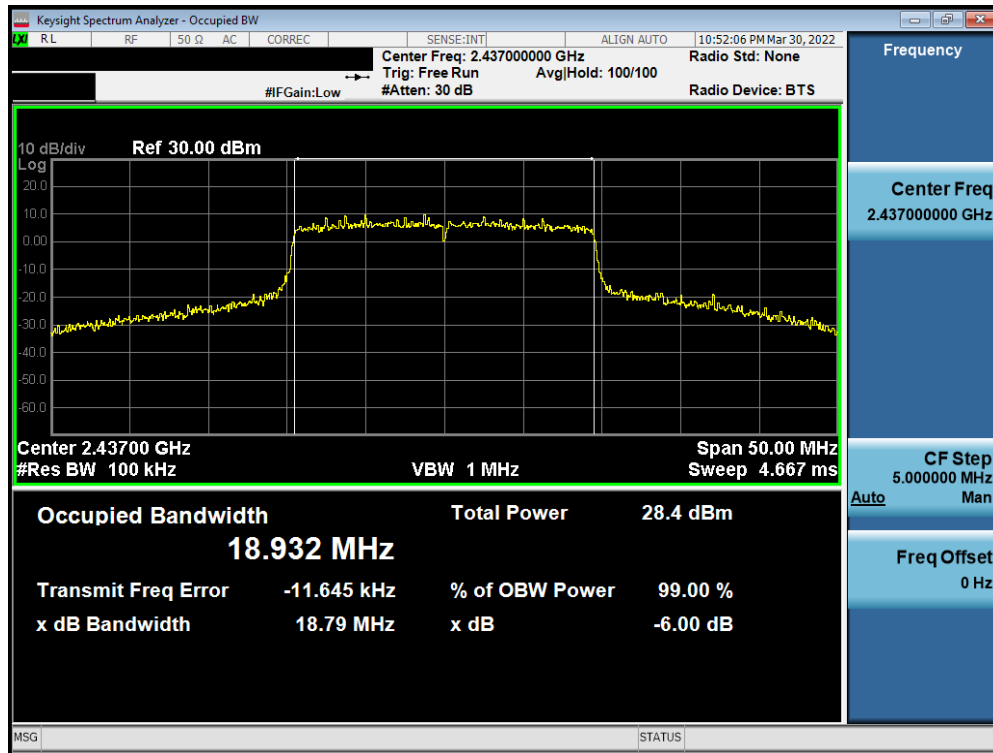


Plot 7-29. 6dB Bandwidth Plot SISO ANT2 (802.11ax 20MHz (2.4GHz) – Ch. 6)

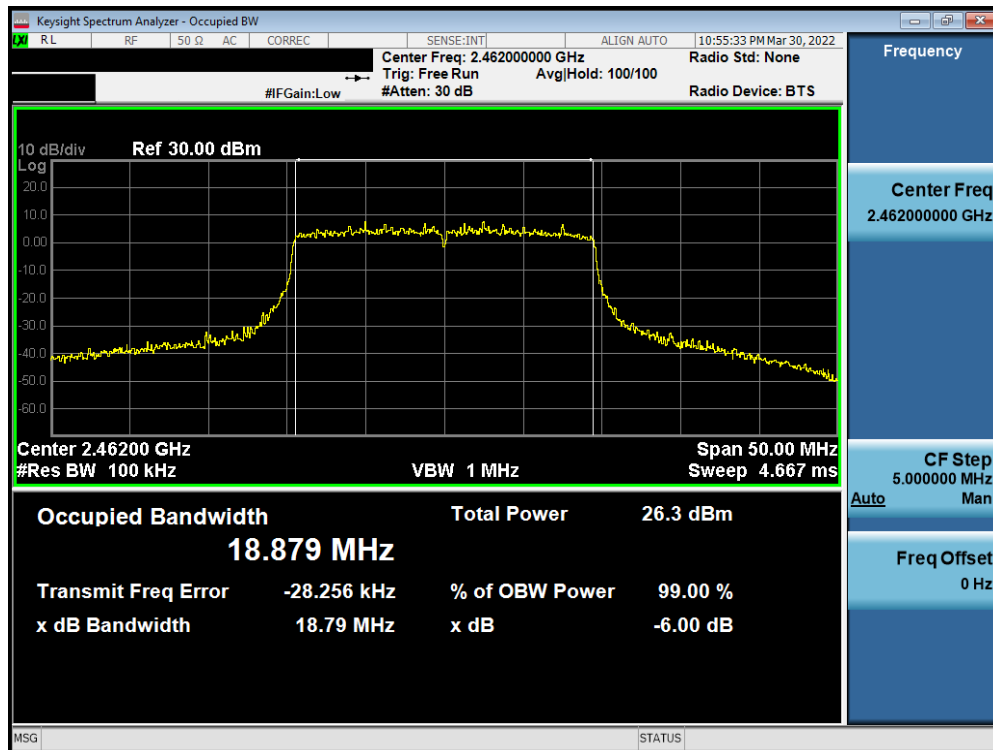


Plot 7-30. 6dB Bandwidth Plot SISO ANT2 (802.11ax 20MHz (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 32 of 164

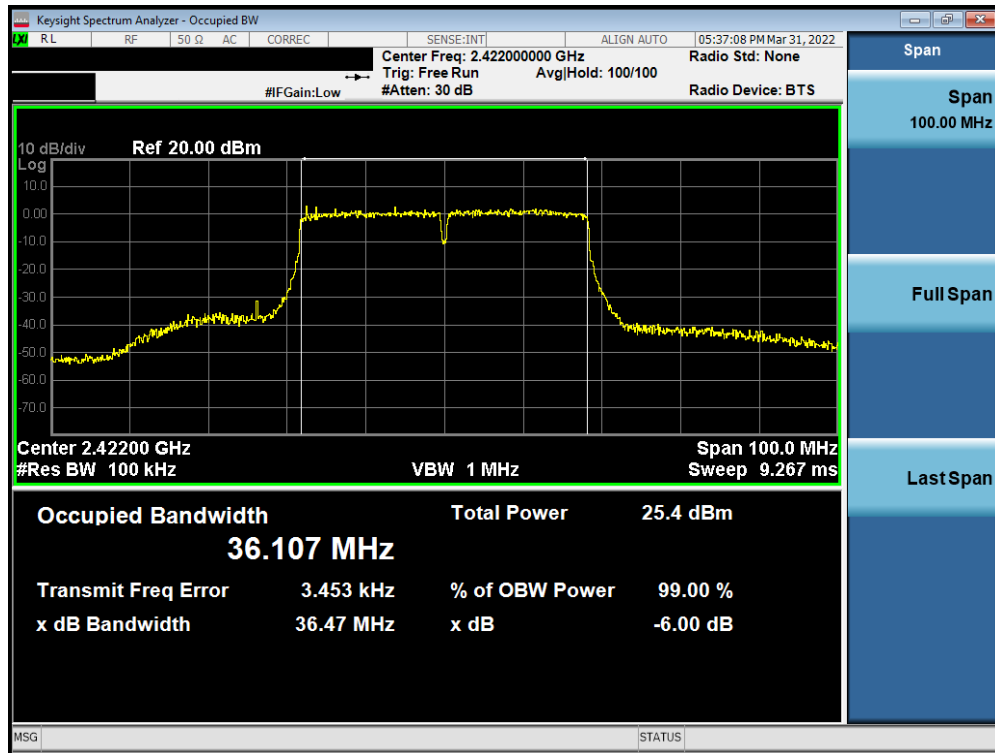


Plot 7-31. 6dB Bandwidth Plot SISO ANT2 (802.11n 40MHz (2.4GHz) – Ch. 3)

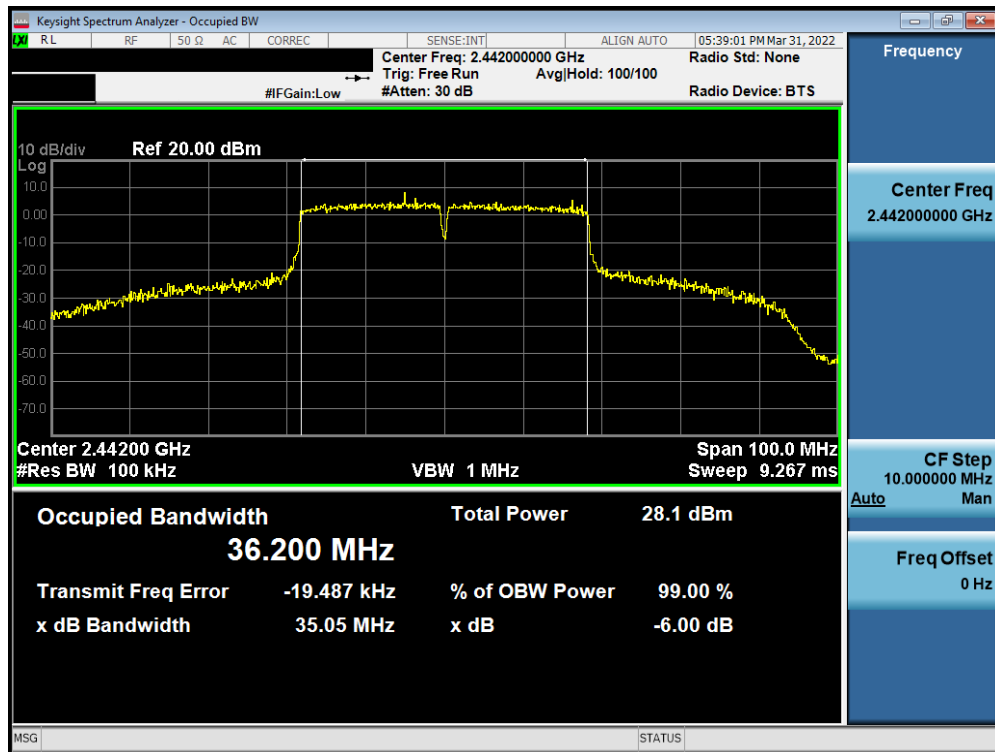


Plot 7-32. 6dB Bandwidth Plot SISO ANT2 (802.11n 40MHz (2.4GHz) – Ch. 7)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 33 of 164

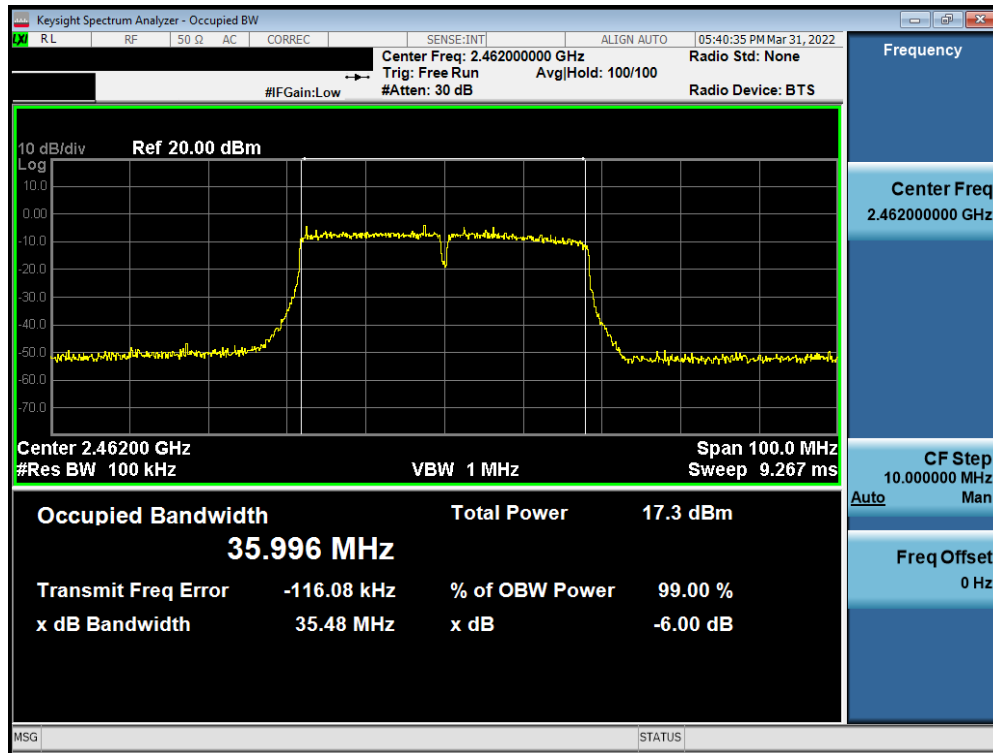


Plot 7-33. 6dB Bandwidth Plot SISO ANT2 (802.11n 40MHz (2.4GHz) – Ch. 11)

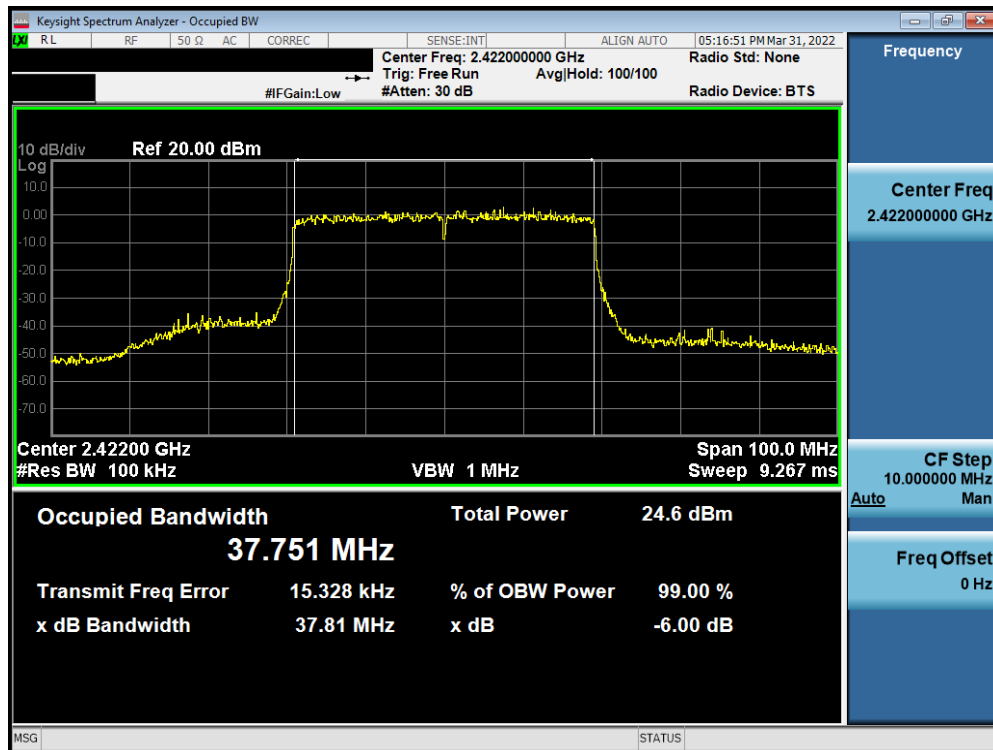


Plot 7-34. 6dB Bandwidth Plot SISO ANT2 (802.11ax 40MHz (2.4GHz) – Ch. 3)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 34 of 164

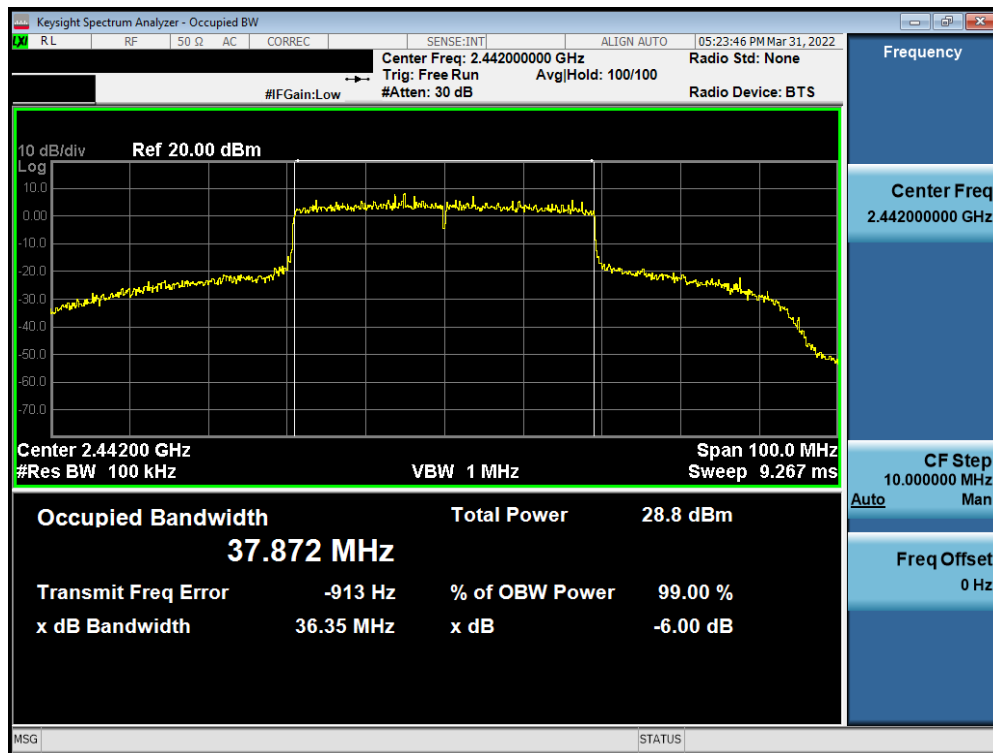

Plot 7-35. 6dB Bandwidth Plot SISO ANT2 (802.11ax 40MHz) (2.4GHz) – Ch. 7)

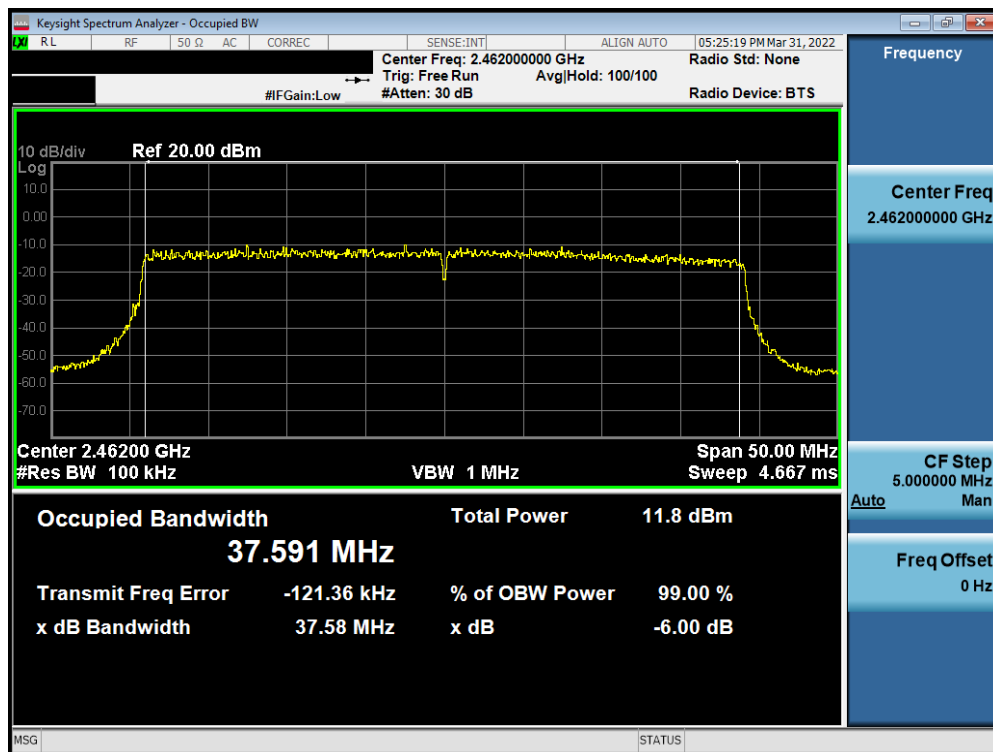

Plot 7-36. 6dB Bandwidth Plot SISO ANT2 (802.11ax 40MHz) (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 35 of 164

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

The maximum e.i.r.p. shall not exceed 4 Watts.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 36 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.4GHz	Freq [MHz]	Channel	Detector	IEEE Transmission Mode				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11b	802.11g	802.11n	802.11ax						
	2412	1	AVG	19.98	17.16	14.83	15.60	30.00	-10.02	1.40	21.38	36.02	-14.64
			PEAK	24.22	24.04	20.50	22.92	30.00	-5.78	1.40	25.62	36.02	-10.40
	2417	2	AVG	19.97	18.97	18.95	18.35	30.00	-10.03	1.40	21.37	36.02	-14.65
			PEAK	24.18	25.03	25.16	25.55	30.00	-4.84	1.40	26.56	36.02	-9.46
	2422	3	AVG	20.68	19.82	19.85	19.99	30.00	-9.32	1.40	22.08	36.02	-13.94
			PEAK	24.72	26.35	25.75	26.84	30.00	-3.65	1.40	27.75	36.02	-8.27
	2437	6	AVG	20.47	20.64	20.56	20.57	30.00	-9.36	1.40	22.04	36.02	-13.98
			PEAK	24.58	26.77	26.70	26.98	30.00	-3.23	1.40	28.17	36.02	-7.85
	2457	10	AVG	20.57	19.98	19.75	19.35	30.00	-9.43	1.40	21.97	36.02	-14.05
			PEAK	24.73	25.95	25.15	26.22	30.00	-4.05	1.40	27.35	36.02	-8.67
	2462	11	AVG	19.61	18.72	18.59	18.30	30.00	-10.39	1.40	21.01	36.02	-15.01
			PEAK	23.84	24.63	24.89	24.99	30.00	-5.11	1.40	26.29	36.02	-9.73
	2467	12	AVG	17.47	15.48	16.46	15.95	30.00	-12.53	1.40	18.87	36.02	-17.15
			PEAK	21.59	21.56	22.75	23.32	30.00	-7.25	1.40	24.15	36.02	-11.87
	2472	13	AVG	15.94	7.63	8.99	9.24	30.00	-14.06	1.40	17.34	36.02	-18.68
			PEAK	20.02	13.71	14.98	15.75	30.00	-9.98	1.40	21.42	36.02	-14.60

Table 7-4. Conducted Output Power Measurements SISO ANT1 – 20MHz

2.4GHz	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	2422	3	AVG	15.42	15.95	30.00	-14.05	1.40	17.35	36.02	-18.67
			PEAK	20.27	23.31	30.00	-6.69	1.40	24.71	36.02	-11.31
	2427	4	AVG	17.33	17.38	30.00	-12.62	1.40	18.78	36.02	-17.24
			PEAK	22.20	22.93	30.00	-7.07	1.40	24.33	36.02	-11.69
	2432	5	AVG	18.22	18.29	30.00	-11.71	1.40	19.69	36.02	-16.33
			PEAK	23.01	23.71	30.00	-6.29	1.40	25.11	36.02	-10.91
	2437	6	AVG	18.11	18.01	30.00	-11.89	1.40	19.51	36.02	-16.51
			PEAK	25.18	25.45	30.00	-4.55	1.40	26.85	36.02	-9.17
	2442	7	AVG	18.06	18.05	30.00	-11.94	1.40	19.46	36.02	-16.56
			PEAK	25.20	25.65	30.00	-4.35	1.40	27.05	36.02	-8.97
	2447	8	AVG	18.17	18.28	30.00	-11.72	1.40	19.68	36.02	-16.34
			PEAK	25.35	24.66	30.00	-4.65	1.40	26.75	36.02	-9.27
	2452	9	AVG	18.23	18.15	30.00	-11.77	1.40	19.63	36.02	-16.39
			PEAK	23.10	23.65	30.00	-6.35	1.40	25.05	36.02	-10.97
	2457	10	AVG	16.24	15.95	30.00	-13.76	1.40	17.64	36.02	-18.38
			PEAK	23.50	23.43	30.00	-6.50	1.40	24.90	36.02	-11.12
	2462	11	AVG	9.47	9.98	30.00	-20.02	1.40	11.38	36.02	-24.64
			PEAK	16.81	17.77	30.00	-12.23	1.40	19.17	36.02	-16.85

Table 7-5. Conducted Output Power Measurements SISO ANT1 – 40MHz

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 37 of 164

2.4GHz	Freq [MHz]	Channel	Detector	IEEE Transmission Mode				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11b	802.11g	802.11n	802.11ax						
	2412	1	AVG	19.62	17.31	15.68	15.90	30.00	-10.38	1.60	21.22	36.02	-14.80
			PEAK	23.77	24.33	21.69	23.99	30.00	-5.67	1.60	25.93	36.02	-10.09
	2417	2	AVG	19.57	18.94	18.83	18.65	30.00	-10.43	1.60	21.17	36.02	-14.85
			PEAK	23.78	25.23	25.16	26.32	30.00	-4.77	1.60	26.83	36.02	-9.19
	2422	3	AVG	20.64	19.72	19.78	19.98	30.00	-9.36	1.60	22.24	36.02	-13.78
			PEAK	24.82	26.29	25.65	26.95	30.00	-3.71	1.60	27.89	36.02	-8.13
	2437	6	AVG	20.80	20.60	20.47	20.52	30.00	-9.20	1.60	22.40	36.02	-13.62
			PEAK	24.92	26.79	26.77	26.93	30.00	-3.21	1.60	28.39	36.02	-7.63
	2457	10	AVG	20.66	19.68	19.62	19.22	30.00	-9.34	1.60	22.26	36.02	-13.76
			PEAK	24.76	26.14	25.10	25.98	30.00	-3.86	1.60	27.74	36.02	-8.28
	2462	11	AVG	19.65	18.47	18.45	18.25	30.00	-10.35	1.60	21.25	36.02	-14.77
			PEAK	23.67	24.77	24.76	24.98	30.00	-5.23	1.60	26.37	36.02	-9.65
	2467	12	AVG	17.58	15.48	16.29	16.20	30.00	-12.42	1.60	19.18	36.02	-16.84
			PEAK	21.73	21.84	22.57	23.50	30.00	-7.43	1.60	24.17	36.02	-11.85
	2472	13	AVG	15.68	7.51	8.75	8.80	30.00	-14.32	1.60	17.28	36.02	-18.74
			PEAK	19.84	13.88	14.75	16.35	30.00	-10.16	1.60	21.44	36.02	-14.58

Table 7-6. Conducted Output Power Measurements SISO ANT2 – 20MHz

2.4GHz	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	2422	3	AVG	15.59	15.97	30.00	-14.03	1.60	17.57	36.02	-18.45
			PEAK	20.57	23.45	30.00	-6.55	1.60	25.05	36.02	-10.97
	2427	4	AVG	17.71	17.73	30.00	-12.27	1.60	19.33	36.02	-16.69
			PEAK	22.72	23.24	30.00	-6.76	1.60	24.84	36.02	-11.18
	2432	5	AVG	18.71	18.67	30.00	-11.29	1.60	20.31	36.02	-15.71
			PEAK	23.63	24.20	30.00	-5.80	1.60	25.80	36.02	-10.22
	2437	6	AVG	18.42	18.55	30.00	-11.45	1.60	20.15	36.02	-15.87
			PEAK	25.32	25.19	30.00	-4.68	1.60	26.92	36.02	-9.10
	2442	7	AVG	18.54	18.48	30.00	-11.46	1.60	20.14	36.02	-15.88
			PEAK	25.44	25.17	30.00	-4.56	1.60	27.04	36.02	-8.98
	2447	8	AVG	18.62	18.75	30.00	-11.25	1.60	20.35	36.02	-15.67
			PEAK	25.56	24.28	30.00	-4.44	1.60	27.16	36.02	-8.86
	2452	9	AVG	18.92	18.35	30.00	-11.08	1.60	20.52	36.02	-15.50
			PEAK	23.77	23.85	30.00	-6.15	1.60	25.45	36.02	-10.57
	2457	10	AVG	16.49	16.48	30.00	-13.51	1.60	18.09	36.02	-17.93
			PEAK	23.73	23.61	30.00	-6.27	1.60	25.33	36.02	-10.69
	2462	11	AVG	9.95	9.85	30.00	-20.05	1.60	11.55	36.02	-24.47
			PEAK	17.37	17.68	30.00	-12.32	1.60	19.28	36.02	-16.74

Table 7-7. Conducted Output Power Measurements SISO ANT2 – 40MHz

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 38 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	19.98	19.62	22.81	30.00	-7.19	4.51	27.32	36.02	-8.70
			PEAK	24.22	23.77	27.01	30.00	-2.99	4.51	31.52	36.02	-4.50
	2417	2	AVG	19.97	19.57	22.78	30.00	-7.22	4.51	27.29	36.02	-8.73
			PEAK	24.18	23.78	26.99	30.00	-3.01	4.51	31.50	36.02	-4.52
	2422	3	AVG	20.68	20.64	23.67	30.00	-6.33	4.51	28.18	36.02	-7.84
			PEAK	24.72	24.82	27.78	30.00	-2.22	4.51	32.29	36.02	-3.73
	2437	6	AVG	20.47	20.80	23.65	30.00	-6.35	4.51	28.16	36.02	-7.86
			PEAK	24.58	24.92	27.76	30.00	-2.24	4.51	32.27	36.02	-3.75
	2457	10	AVG	20.57	20.66	23.63	30.00	-6.37	4.51	28.14	36.02	-7.88
			PEAK	24.73	24.76	27.76	30.00	-2.24	4.51	32.27	36.02	-3.75
	2462	11	AVG	19.61	19.65	22.64	30.00	-7.36	4.51	27.15	36.02	-8.87
			PEAK	23.84	23.67	26.77	30.00	-3.23	4.51	31.28	36.02	-4.74

Table 7-8. Conducted Output Power Measurements MIMO (802.11b)

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	17.16	17.31	20.25	30.00	-9.75	4.51	24.76	36.02	-11.26
			PEAK	24.04	24.33	27.20	30.00	-2.80	4.51	31.71	36.02	-4.31
	2417	2	AVG	18.97	18.94	21.97	30.00	-8.03	4.51	26.48	36.02	-9.54
			PEAK	25.03	25.23	28.14	30.00	-1.86	4.51	32.65	36.02	-3.37
	2422	3	AVG	19.82	19.72	22.78	30.00	-7.22	4.51	27.29	36.02	-8.73
			PEAK	26.35	26.29	29.33	30.00	-0.67	4.51	33.84	36.02	-2.18
	2437	6	AVG	20.64	20.60	23.63	30.00	-6.37	4.51	28.14	36.02	-7.88
			PEAK	26.77	26.79	29.79	30.00	-0.21	4.51	34.30	36.02	-1.72
	2457	10	AVG	19.98	19.68	22.84	30.00	-7.16	4.51	27.35	36.02	-8.67
			PEAK	25.95	26.14	29.06	30.00	-0.94	4.51	33.57	36.02	-2.45
	2462	11	AVG	18.72	18.47	21.61	30.00	-8.39	4.51	26.12	36.02	-9.90
			PEAK	24.63	24.77	27.71	30.00	-2.29	4.51	32.22	36.02	-3.80

Table 7-9. Conducted Output Power Measurements MIMO (802.11g)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 39 of 164

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	14.83	15.68	18.29	30.00	-11.71	4.51	22.80	36.02	-13.22
			PEAK	20.50	21.69	24.15	30.00	-5.85	4.51	28.66	36.02	-7.36
	2417	2	AVG	18.95	18.83	21.90	30.00	-8.10	4.51	26.41	36.02	-9.61
			PEAK	25.16	25.16	28.17	30.00	-1.83	4.51	32.68	36.02	-3.34
	2422	3	AVG	21.65	19.78	23.83	30.00	-6.17	4.51	28.34	36.02	-7.68
			PEAK	25.75	26.87	29.36	30.00	-0.64	4.51	33.87	36.02	-2.15
	2437	6	AVG	20.56	20.47	23.53	30.00	-6.47	4.51	28.04	36.02	-7.98
			PEAK	26.70	26.77	29.75	30.00	-0.25	4.51	34.26	36.02	-1.76
	2457	10	AVG	19.75	19.62	22.70	30.00	-7.30	4.51	27.21	36.02	-8.81
			PEAK	25.15	25.10	28.14	30.00	-1.86	4.51	32.65	36.02	-3.37
	2462	11	AVG	18.59	18.45	21.53	30.00	-8.47	4.51	26.04	36.02	-9.98
			PEAK	24.89	24.76	27.84	30.00	-2.16	4.51	32.35	36.02	-3.67

Table 7-10. Conducted Output Power Measurements MIMO (802.11n) – 20MHz

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	15.60	15.90	18.76	30.00	-11.24	4.51	23.27	36.02	-12.75
			PEAK	22.92	23.99	26.50	30.00	-3.50	4.51	31.01	36.02	-5.01
	2417	2	AVG	18.35	18.65	21.51	30.00	-8.49	4.51	26.02	36.02	-10.00
			PEAK	25.55	26.32	28.96	30.00	-1.04	4.51	33.47	36.02	-2.55
	2422	3	AVG	19.99	19.98	23.00	30.00	-7.00	4.51	27.51	36.02	-8.51
			PEAK	26.84	26.95	29.91	30.00	-0.09	4.51	34.42	36.02	-1.60
	2437	6	AVG	20.57	20.52	23.56	30.00	-6.44	4.51	28.07	36.02	-7.95
			PEAK	26.98	26.93	29.97	30.00	-0.03	4.51	34.48	36.02	-1.54
	2457	10	AVG	19.35	19.22	22.30	30.00	-7.70	4.51	26.81	36.02	-9.21
			PEAK	26.22	25.98	29.11	30.00	-0.89	4.51	33.62	36.02	-2.40
	2462	11	AVG	18.30	18.25	21.29	30.00	-8.71	4.51	25.80	36.02	-10.22
			PEAK	24.99	24.98	28.00	30.00	-2.00	4.51	32.51	36.02	-3.51

Table 7-11. Conducted Output Power Measurements MIMO (802.11ax) – 20MHz

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 40 of 164

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
2.4GHz	2422	3	AVG	15.42	15.59	18.52	30.00	-11.48	4.51	23.03	36.02	-12.99
			PEAK	20.27	20.57	23.43	30.00	-6.57	4.51	27.94	36.02	-8.08
	2427	4	AVG	17.33	17.71	20.53	30.00	-9.47	4.51	25.04	36.02	-10.98
			PEAK	22.20	22.72	25.48	30.00	-4.52	4.51	29.99	36.02	-6.03
	2432	5	AVG	18.22	18.71	21.48	30.00	-8.52	4.51	25.99	36.02	-10.03
			PEAK	23.01	23.63	26.34	30.00	-3.66	4.51	30.85	36.02	-5.17
	2437	6	AVG	18.11	18.42	21.28	30.00	-8.72	4.51	25.79	36.02	-10.23
			PEAK	25.18	25.32	28.26	30.00	-1.74	4.51	32.77	36.02	-3.25
	2442	7	AVG	18.06	18.54	21.32	30.00	-8.68	4.51	25.83	36.02	-10.19
			PEAK	25.20	25.44	28.33	30.00	-1.67	4.51	32.84	36.02	-3.18
	2447	8	AVG	18.17	18.62	21.41	30.00	-8.59	4.51	25.92	36.02	-10.10
			PEAK	25.35	25.56	28.47	30.00	-1.53	4.51	32.98	36.02	-3.04
	2452	9	AVG	18.23	18.92	21.60	30.00	-8.40	4.51	26.11	36.02	-9.91
			PEAK	23.10	23.77	26.46	30.00	-3.54	4.51	30.97	36.02	-5.05
	2457	10	AVG	16.24	16.49	19.38	30.00	-10.62	4.51	23.89	36.02	-12.13
			PEAK	23.50	23.73	26.63	30.00	-3.37	4.51	31.14	36.02	-4.88
	2462	11	AVG	9.47	9.95	12.73	30.00	-17.27	4.51	17.24	36.02	-18.78
			PEAK	16.81	17.37	20.11	30.00	-9.89	4.51	24.62	36.02	-11.40

Table 7-12. Conducted Output Power Measurements MIMO (802.11n) – 40MHz

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
2.4GHz	2422	3	AVG	15.95	15.97	18.97	30.00	-11.03	4.51	23.48	36.02	-12.54
			PEAK	23.31	23.45	26.39	30.00	-3.61	4.51	30.90	36.02	-5.12
	2427	4	AVG	17.38	17.73	20.57	30.00	-9.43	4.51	25.08	36.02	-10.94
			PEAK	22.93	23.24	26.10	30.00	-3.90	4.51	30.61	36.02	-5.41
	2432	5	AVG	18.29	18.67	21.49	30.00	-8.51	4.51	26.00	36.02	-10.02
			PEAK	23.71	24.20	26.97	30.00	-3.03	4.51	31.48	36.02	-4.54
	2437	6	AVG	18.01	18.55	21.30	30.00	-8.70	4.51	25.81	36.02	-10.21
			PEAK	25.45	25.19	28.33	30.00	-1.67	4.51	32.84	36.02	-3.18
	2442	7	AVG	18.05	18.48	21.28	30.00	-8.72	4.51	25.79	36.02	-10.23
			PEAK	25.65	25.17	28.43	30.00	-1.57	4.51	32.94	36.02	-3.08
	2447	8	AVG	18.28	18.75	21.53	30.00	-8.47	4.51	26.04	36.02	-9.98
			PEAK	24.66	24.28	27.48	30.00	-2.52	4.51	31.99	36.02	-4.03
	2452	9	AVG	18.18	18.35	21.28	30.00	-8.72	4.51	25.79	36.02	-10.23
			PEAK	23.65	23.85	26.76	30.00	-3.24	4.51	31.27	36.02	-4.75
	2457	10	AVG	15.95	16.48	19.23	30.00	-10.77	4.51	23.74	36.02	-12.28
			PEAK	23.43	23.61	26.53	30.00	-3.47	4.51	31.04	36.02	-4.98
	2462	11	AVG	9.98	9.85	12.93	30.00	-17.07	4.51	17.44	36.02	-18.58
			PEAK	17.77	17.68	20.74	30.00	-9.26	4.51	25.25	36.02	-10.77

Table 7-13. Conducted Output Power Measurements MIMO (802.11ax) – 40MHz

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 41 of 164

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 20.56 dBm for Antenna 1 and 20.47 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(20.56 \text{ dBm} + 20.47 \text{ dBm}) = (113.76 \text{ mW} + 111.43 \text{ mW}) = 225.19 \text{ mW} = 23.53 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2412MHz the average MIMO conducted output power was calculated to be 23.56 dBm with directional gain of 4.51 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$23.56 \text{ dBm} + 4.51 \text{ dBi} = 28.07$$

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 42 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 43 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Antenna-1 Power Spectral Density Measurements



Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	3.91	8.00	-4.09	Pass
2437	6	b	1	3.99	8.00	-4.01	Pass
2462	11	b	1	2.67	8.00	-5.33	Pass
2412	1	g	6	-2.13	8.00	-10.13	Pass
2437	6	g	6	-1.22	8.00	-9.22	Pass
2462	11	g	6	-2.88	8.00	-10.88	Pass
2412	1	n (20MHz)	6.5/7.2 (MCS0)	-1.53	8.00	-9.53	Pass
2437	6	n (20MHz)	6.5/7.2 (MCS0)	0.07	8.00	-7.93	Pass
2462	11	n (20MHz)	6.5/7.2 (MCS0)	-0.89	8.00	-8.89	Pass
2412	1	ax (20MHz)	8/8.6 (MCS0)	-3.82	8.00	-11.82	Pass
2437	6	ax (20MHz)	8/8.6 (MCS0)	-0.64	8.00	-8.64	Pass
2462	11	ax (20MHz)	8/8.6 (MCS0)	-2.40	8.00	-10.40	Pass
2422	3	n (40MHz)	13/14.4 (MCS0)	-4.83	8.00	-12.83	Pass
2442	7	n (40MHz)	13/14.4 (MCS0)	-1.47	8.00	-9.47	Pass
2462	11	n (40MHz)	13/14.4 (MCS0)	-12.70	8.00	-20.70	Pass
2422	3	ax (40MHz)	16/17.2 (MCS0)	-7.99	8.00	-15.99	Pass
2442	7	ax (40MHz)	16/17.2 (MCS0)	-1.75	8.00	-9.75	Pass
2462	11	ax (40MHz)	16/17.2 (MCS0)	-13.66	8.00	-21.66	Pass

Table 7-14. Conducted Power Density Measurements SISO ANT1


FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 44 of 164

V9.0 02/01/2019


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

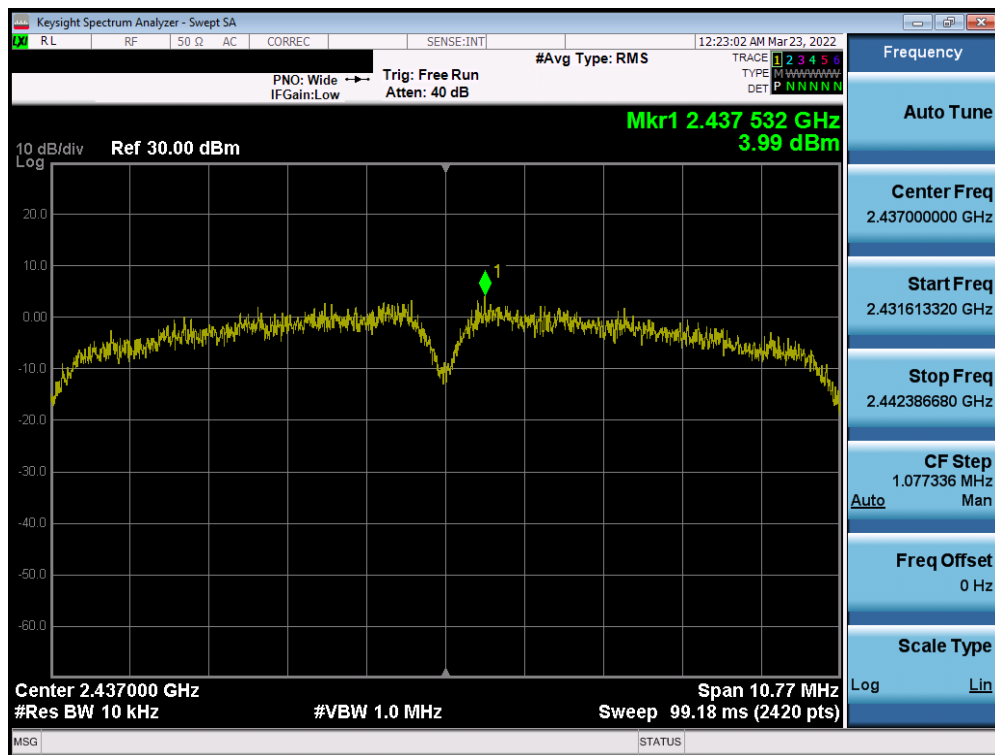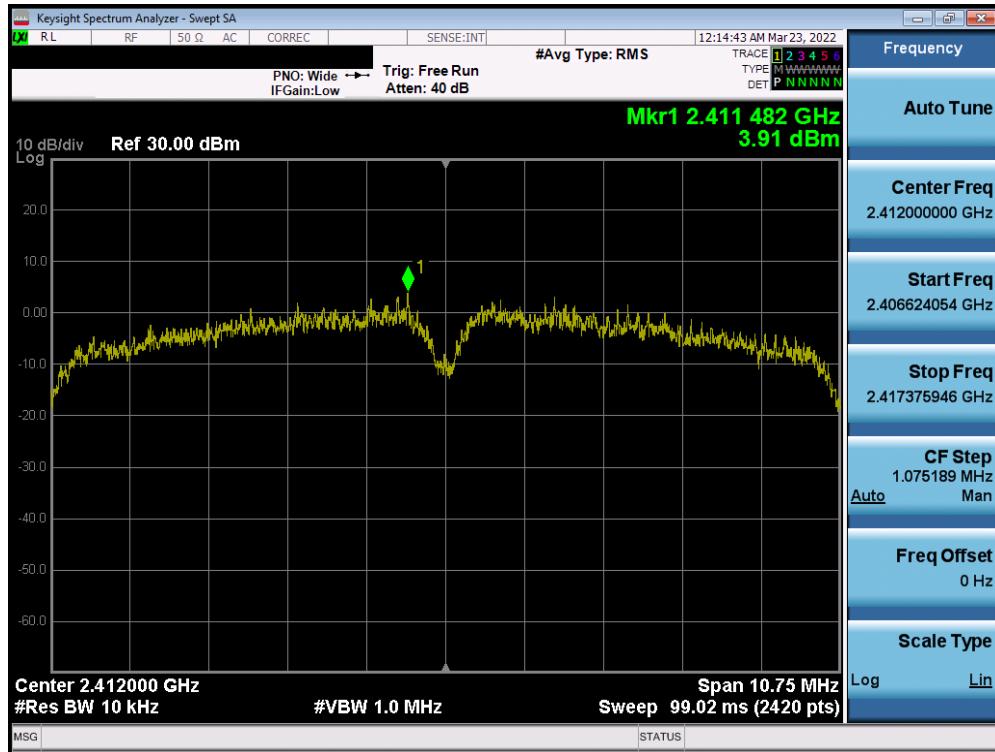

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 45 of 164

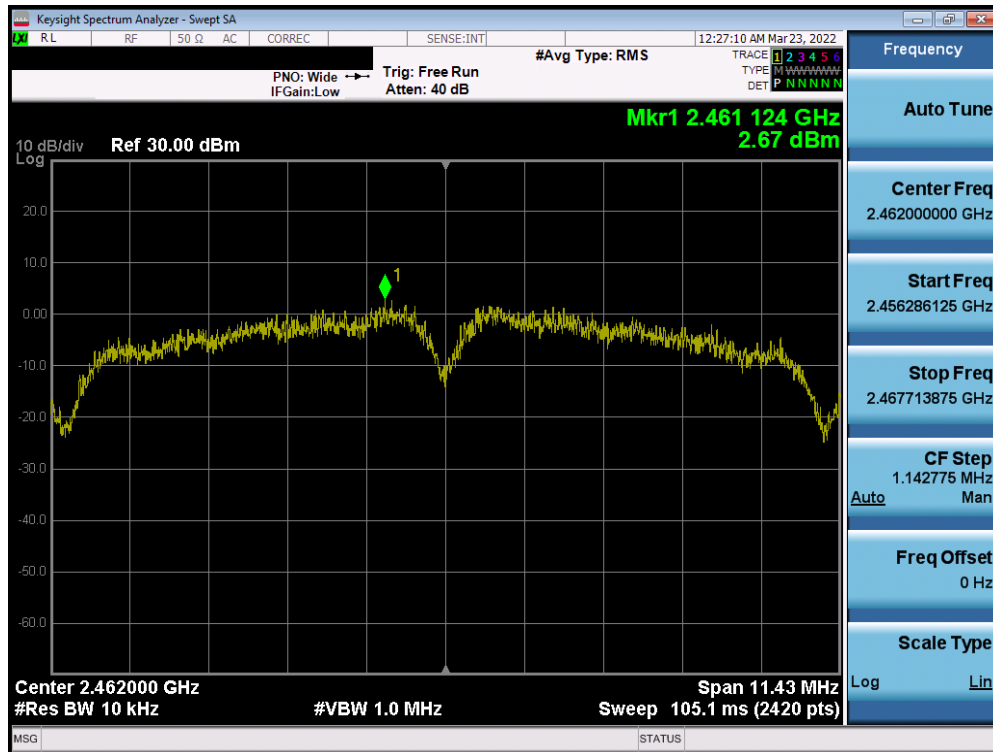


Plot 7-39. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 11)

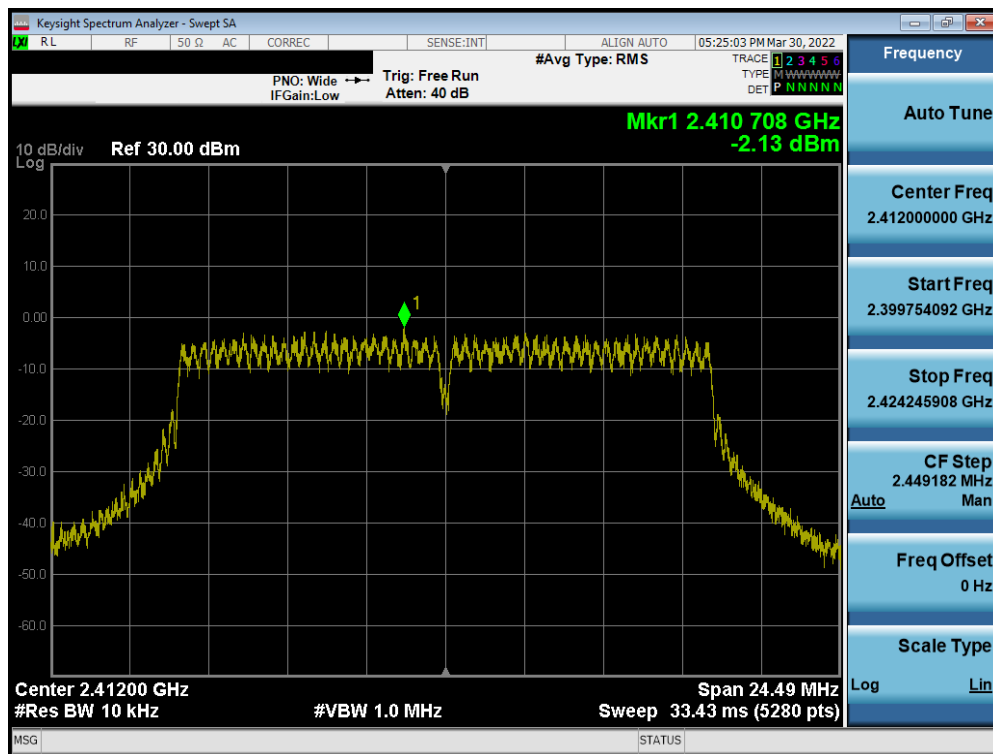


Plot 7-40. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 46 of 164

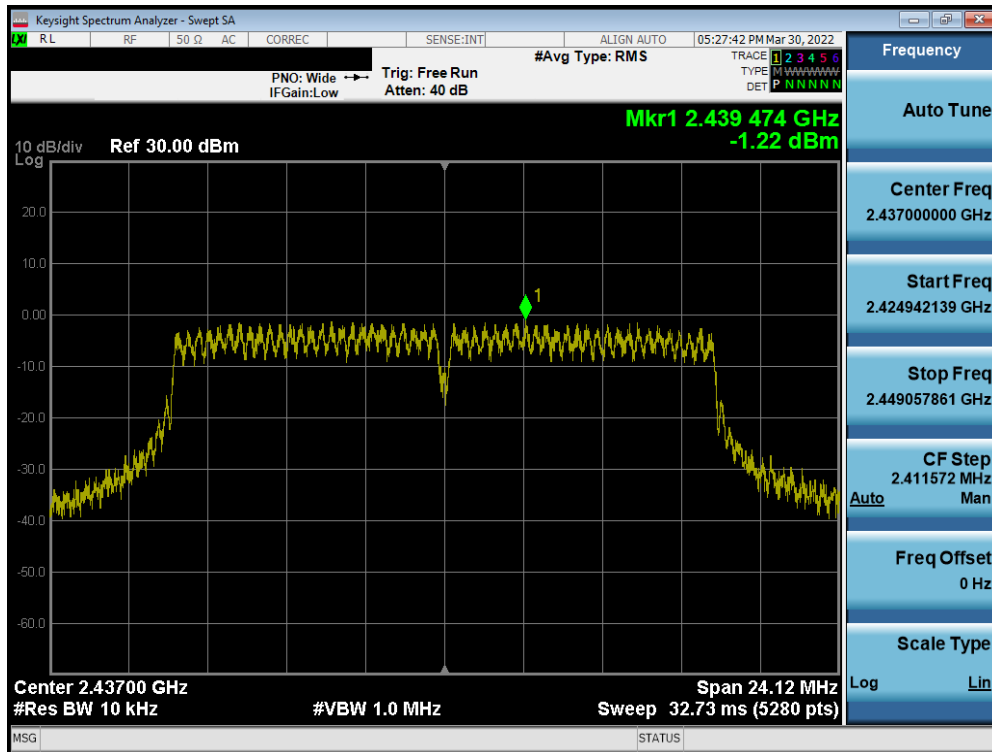


Plot 7-41. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 6)

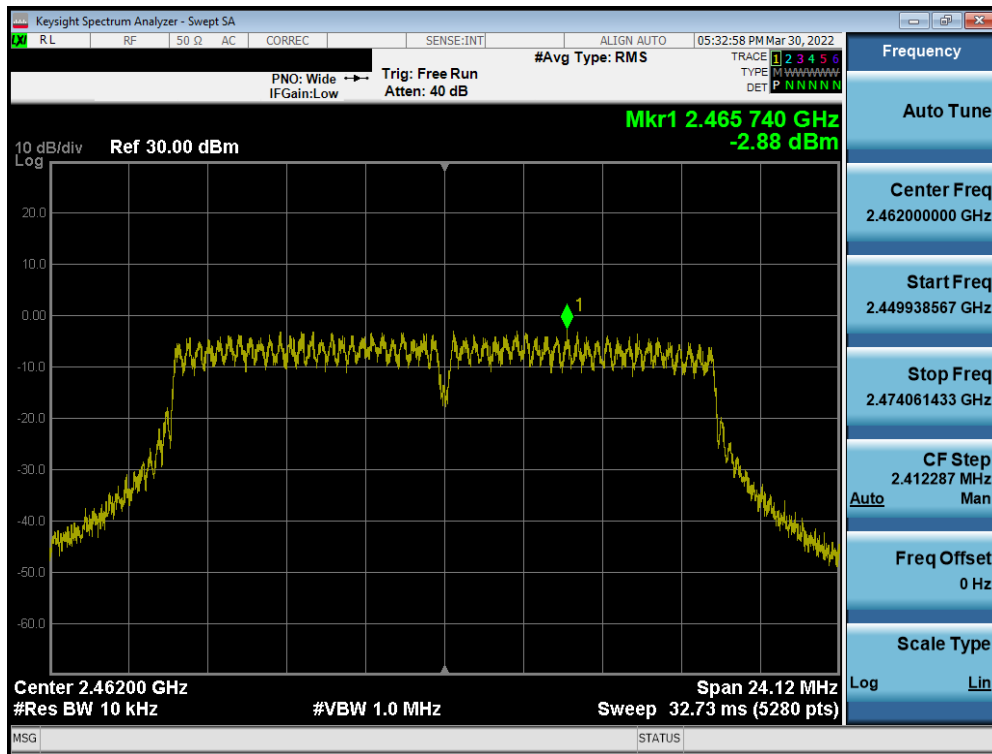


Plot 7-42. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 47 of 164

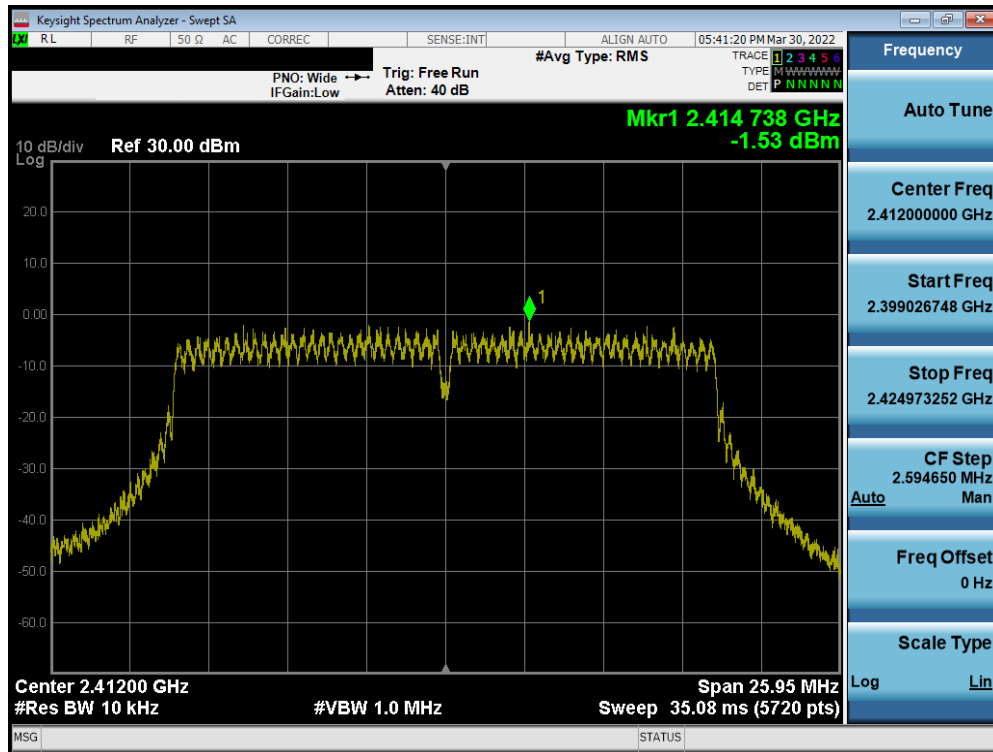


Plot 7-43. Power Spectral Density Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 1)

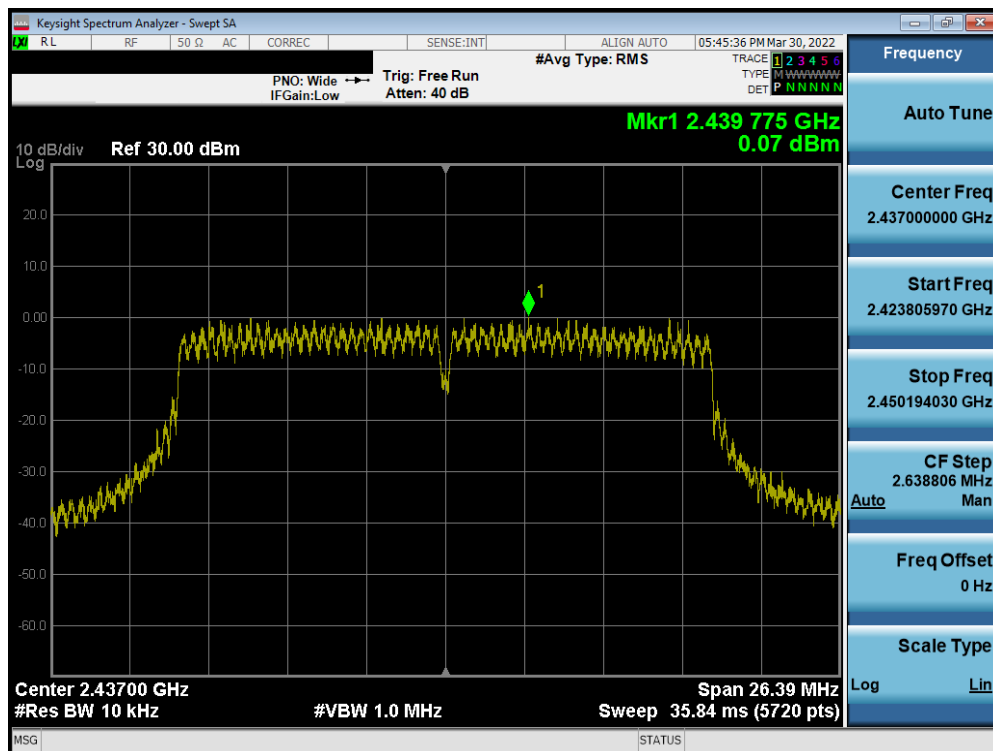


Plot 7-44. Power Spectral Density Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 6)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 48 of 164

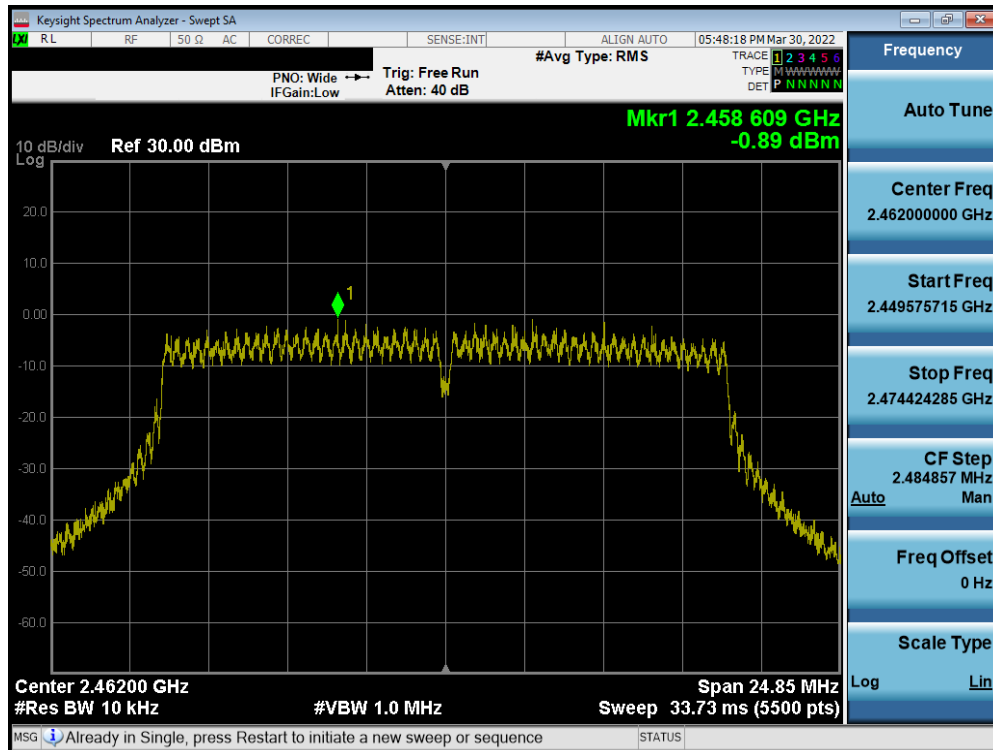


Plot 7-45. Power Spectral Density Plot SISO ANT1 (802.11n 20MHz(2.4GHz) – Ch. 11)

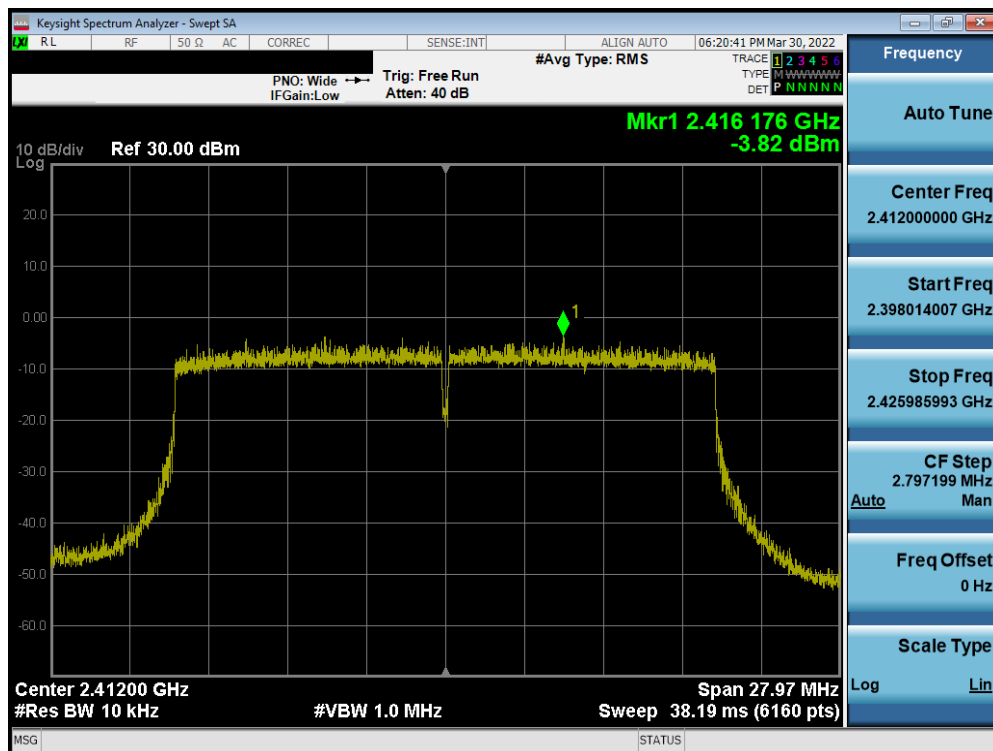


Plot 7-46. Power Spectral Density Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 49 of 164

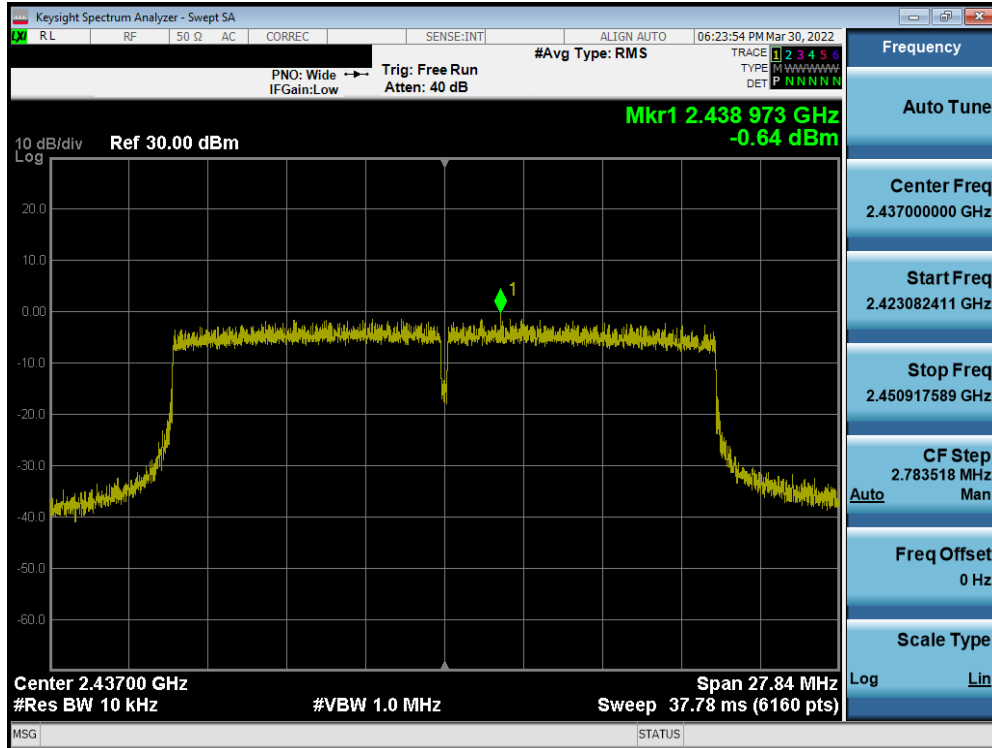


Plot 7-47. Power Spectral Density Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 6)

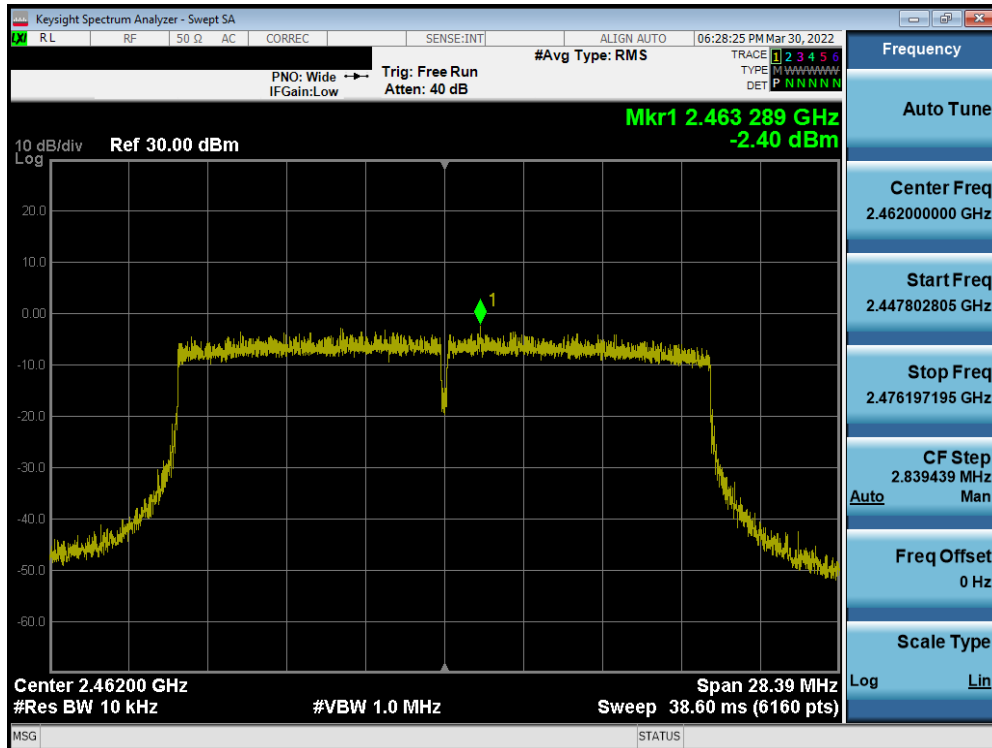


Plot 7-48. Power Spectral Density Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 50 of 164

V9.0 02/01/2019

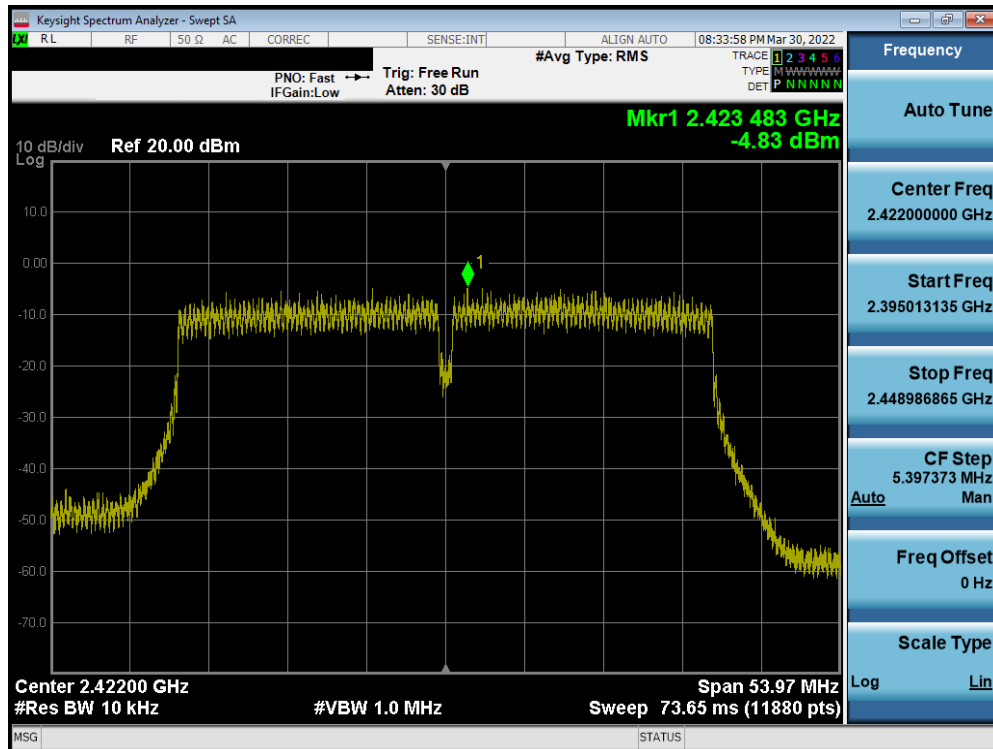


Plot 7-49. Power Spectral Density Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 3)

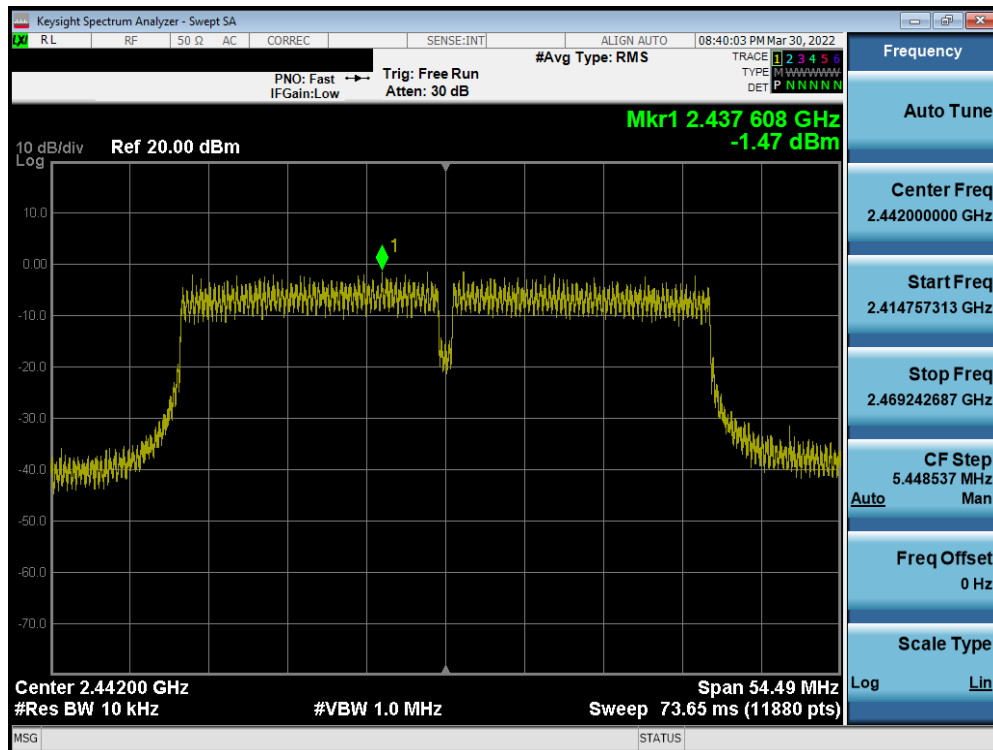


Plot 7-50. Power Spectral Density Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 7)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 51 of 164

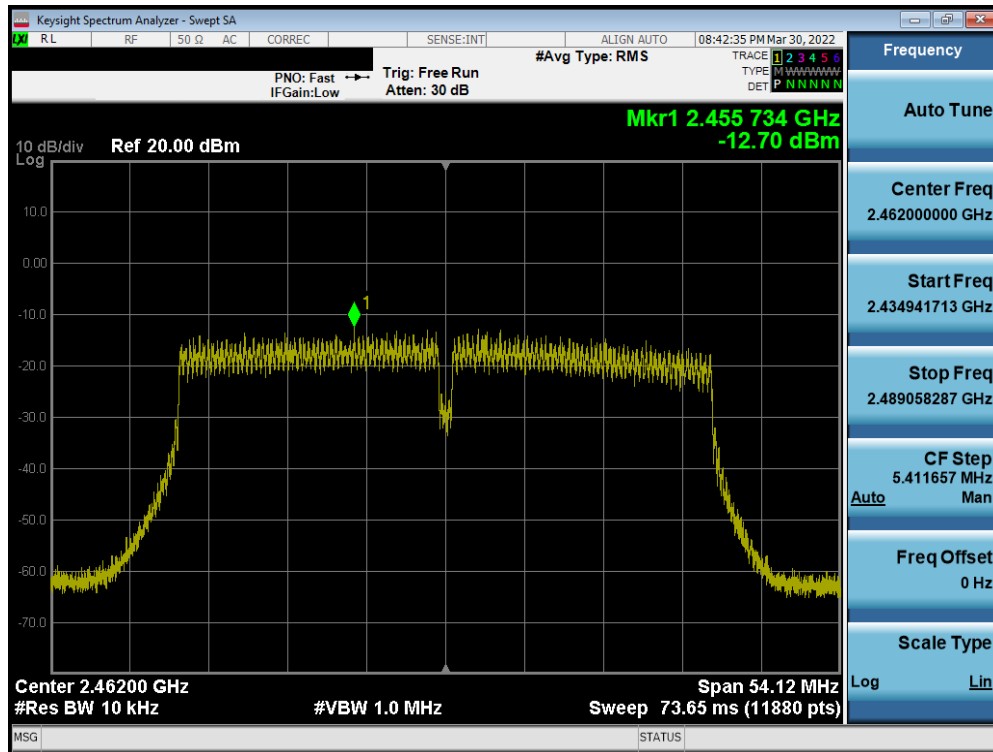


Plot 7-51. Power Spectral Density Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 11)

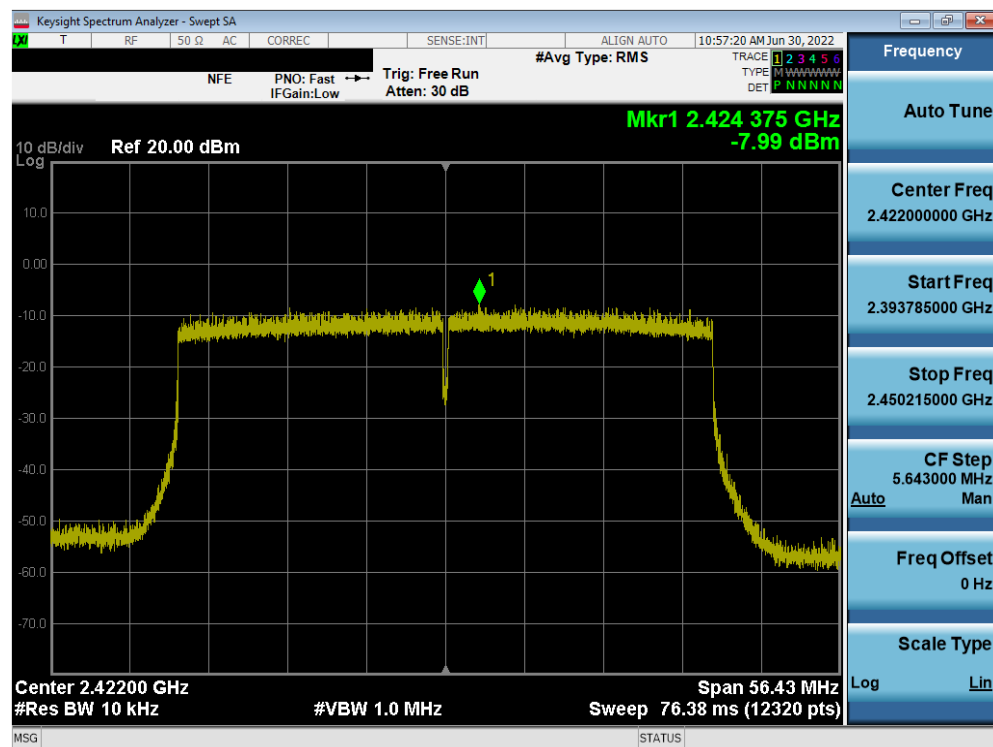


Plot 7-52. Power Spectral Density Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 3)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 52 of 164

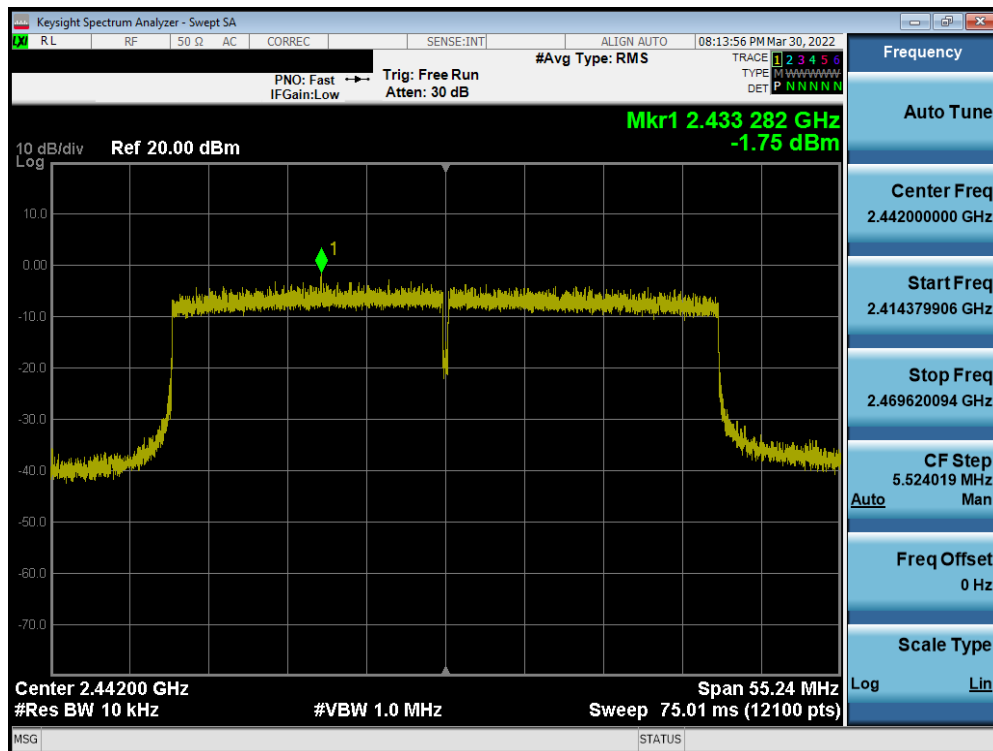

Plot 7-53. Power Spectral Density Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 7)

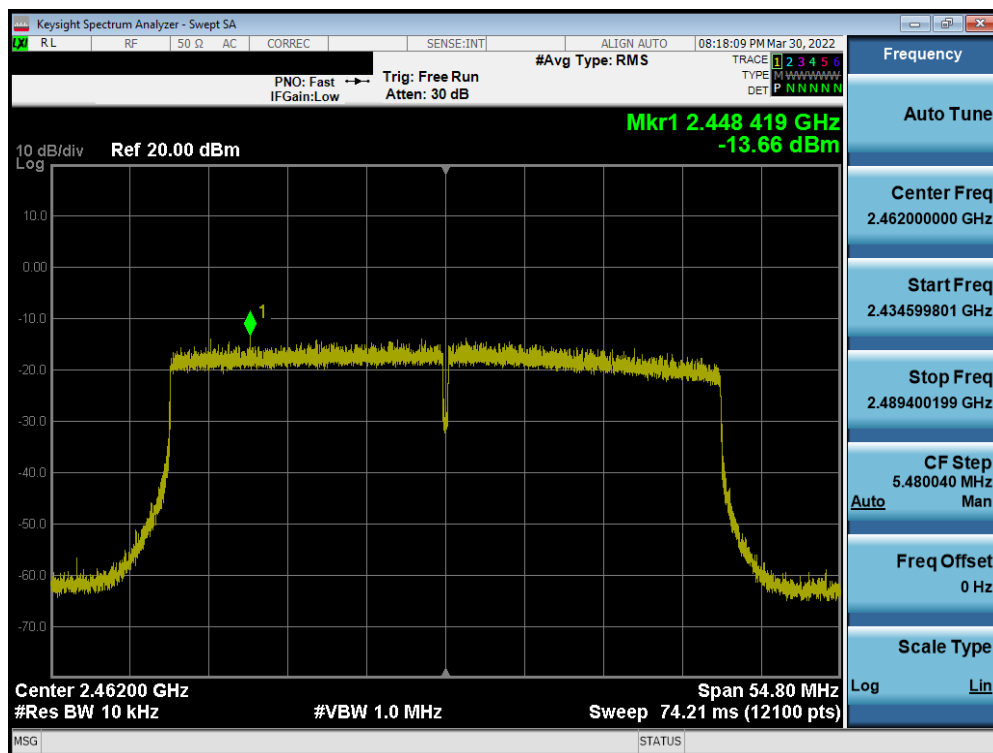

Plot 7-54. Power Spectral Density Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 53 of 164

V9.0 02/01/2019

SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	3.63	8.00	-4.37	Pass
2437	6	b	1	3.08	8.00	-4.92	Pass
2462	11	b	1	2.66	8.00	-5.34	Pass
2412	1	g	6	-0.74	8.00	-8.74	Pass
2437	6	g	6	0.35	8.00	-7.65	Pass
2462	11	g	6	-1.61	8.00	-9.61	Pass
2412	1	n (20MHz)	6.5/7.2 (MCS0)	0.54	8.00	-7.46	Pass
2437	6	n (20MHz)	6.5/7.2 (MCS0)	2.82	8.00	-5.19	Pass
2462	11	n (20MHz)	6.5/7.2 (MCS0)	-0.85	8.00	-8.85	Pass
2412	1	ax (20MHz)	8/8.6 (MCS0)	-3.27	8.00	-11.27	Pass
2437	6	ax (20MHz)	8/8.6 (MCS0)	-0.38	8.00	-8.38	Pass
2462	11	ax (20MHz)	8/8.6 (MCS0)	-2.76	8.00	-10.76	Pass
2422	3	n (40MHz)	13/14.4 (MCS0)	-3.72	8.00	-11.72	Pass
2442	7	n (40MHz)	13/14.4 (MCS0)	-0.37	8.00	-8.37	Pass
2462	11	n (40MHz)	13/14.4 (MCS0)	-11.93	8.00	-19.93	Pass
2422	3	ax (40MHz)	16/17.2 (MCS0)	-5.79	8.00	-13.79	Pass
2442	7	ax (40MHz)	16/17.2 (MCS0)	-1.74	8.00	-9.74	Pass
2462	11	ax (40MHz)	16/17.2 (MCS0)	-12.88	8.00	-20.88	Pass

Table 7-15. Conducted Power Density Measurements SISO ANT2


FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 54 of 164

V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

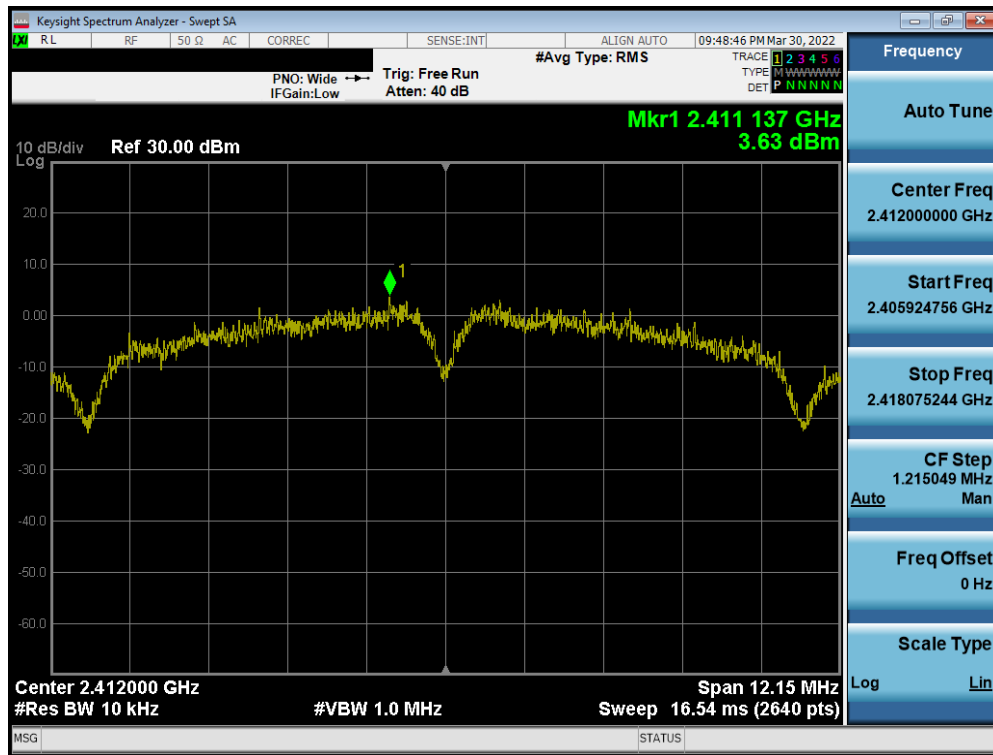


Plot 7-55. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 1)

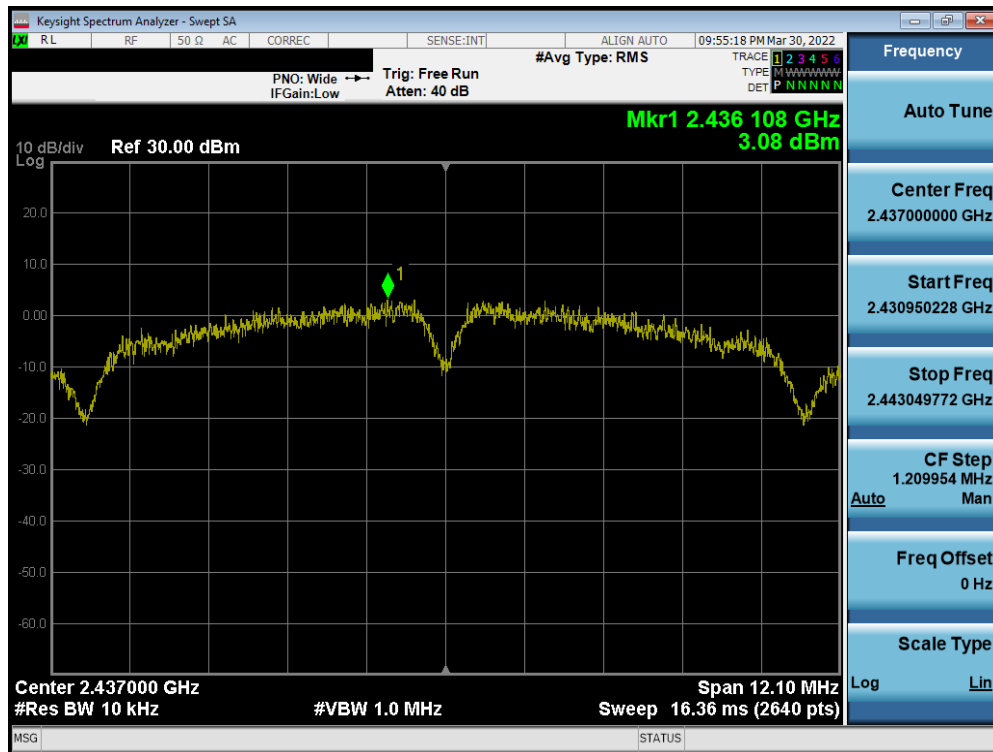


Plot 7-56. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 55 of 164

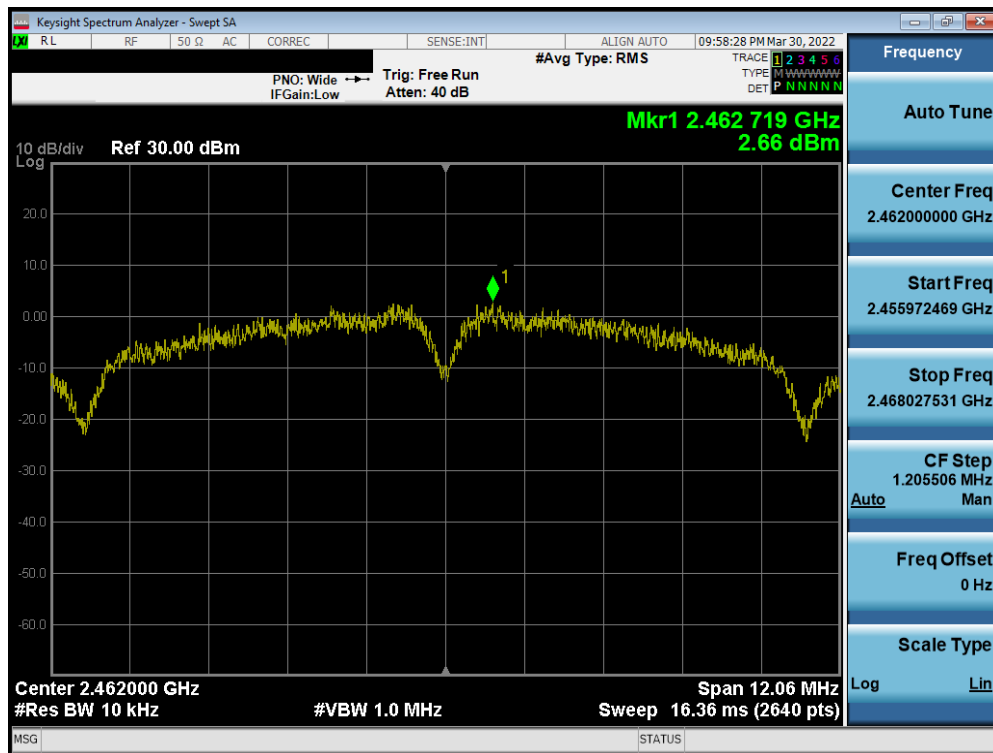


Plot 7-57. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 11)

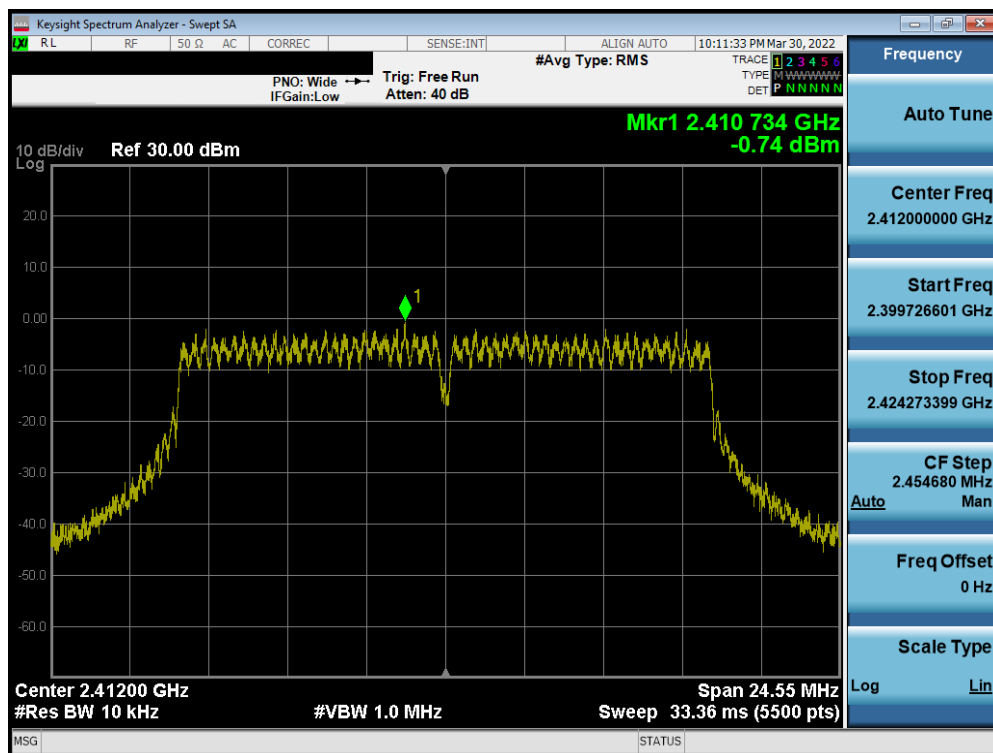


Plot 7-58. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 56 of 164

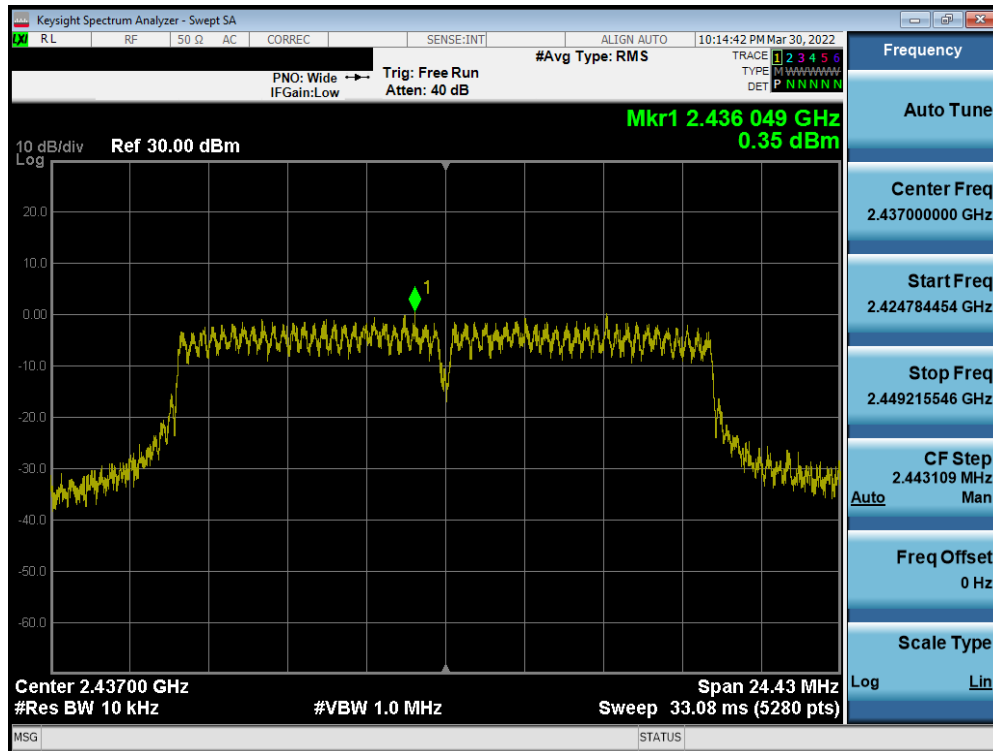


Plot 7-59. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 6)

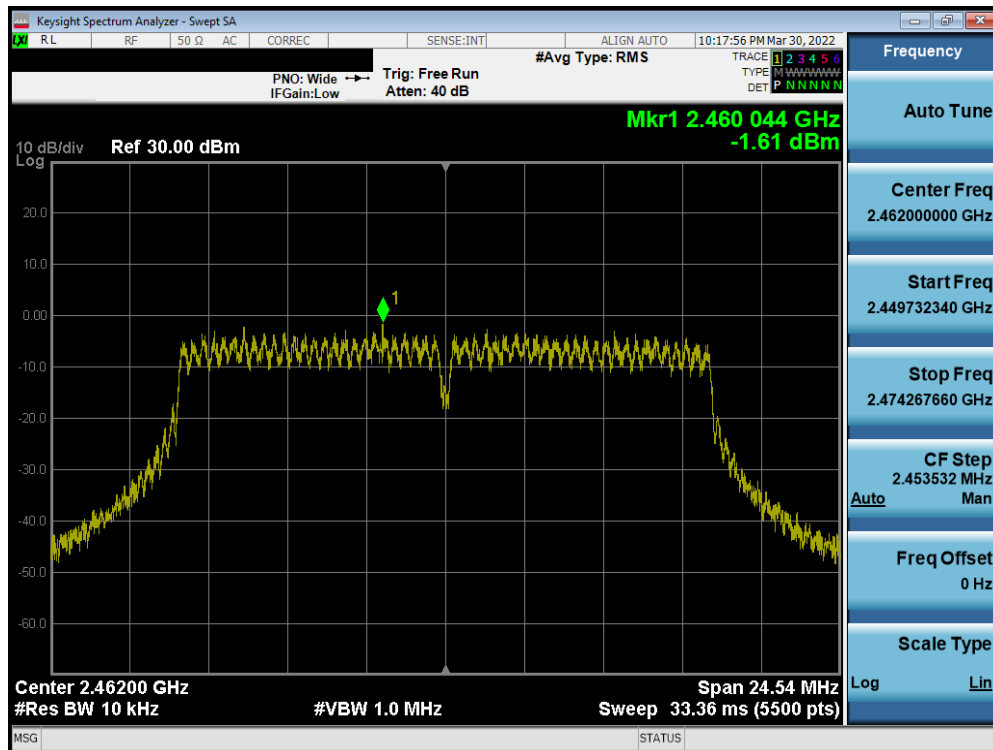


Plot 7-60. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 57 of 164

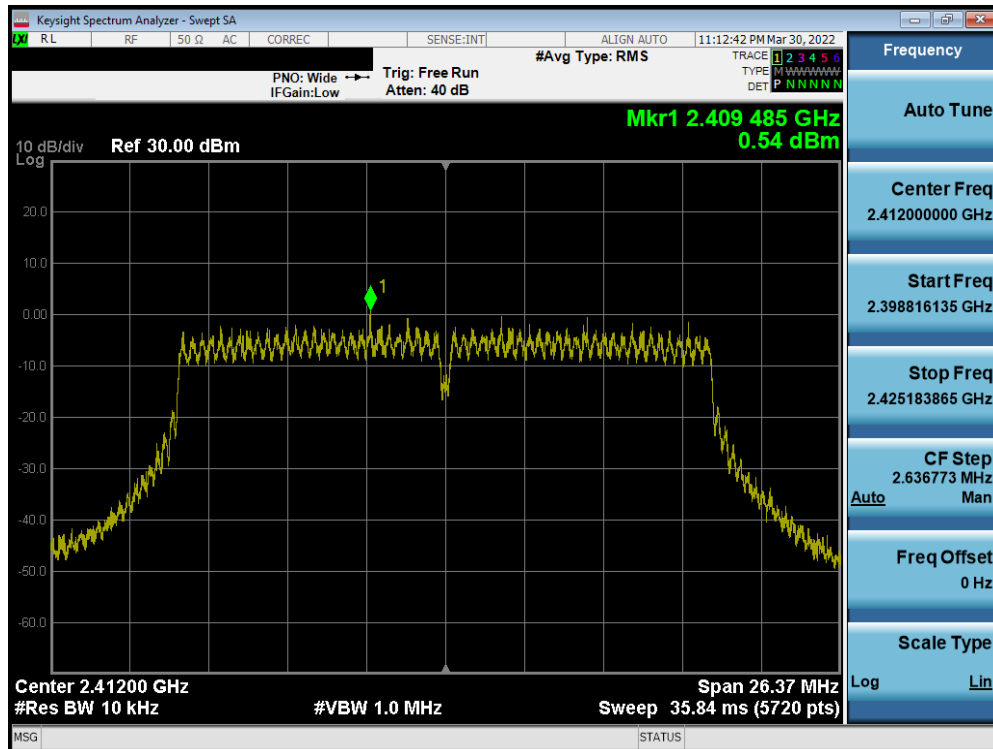


Plot 7-61. Power Spectral Density Plot SISO ANT2 (802.11n 20MHz (2.4GHz) – Ch. 1)

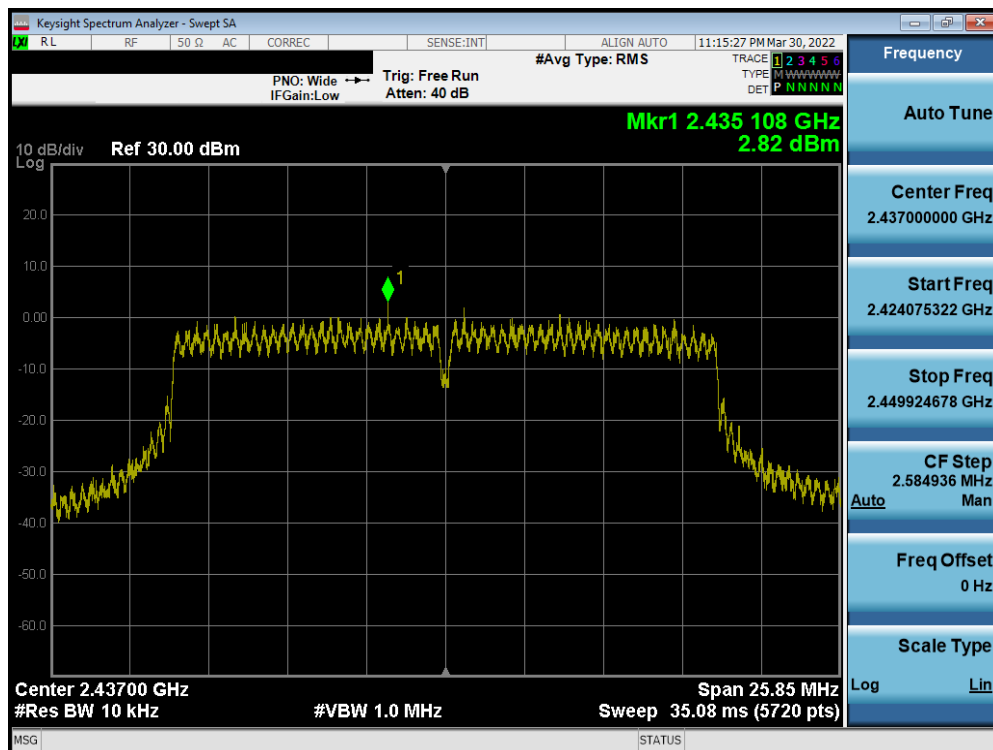


Plot 7-62. Power Spectral Density Plot SISO ANT2 (802.11n 20MHz (2.4GHz) – Ch. 6)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 58 of 164

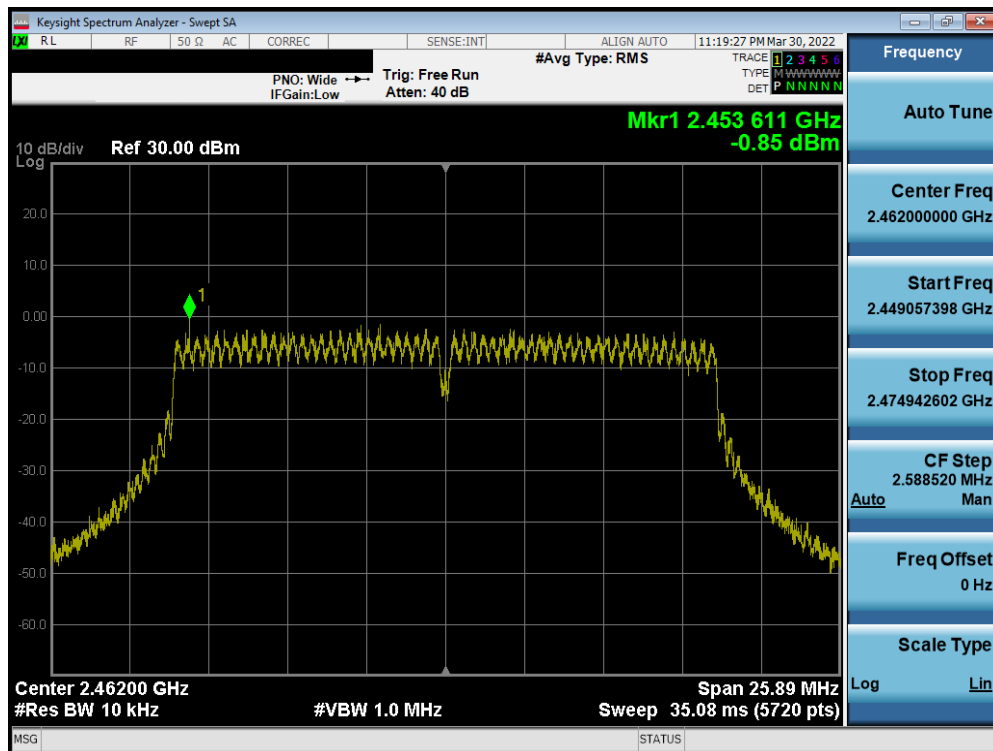


Plot 7-63. Power Spectral Density Plot SISO ANT2 (802.11n 20MHz (2.4GHz) – Ch. 11)

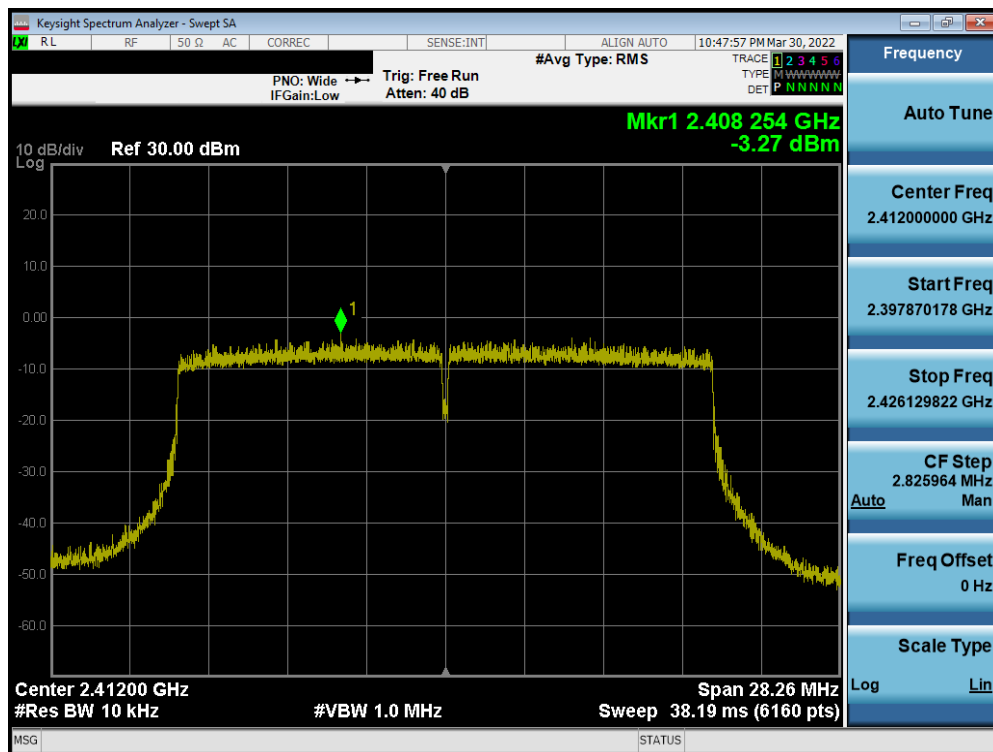


Plot 7-64. Power Spectral Density Plot SISO ANT2 (802.11ax 20MHz (2.4GHz) – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 59 of 164

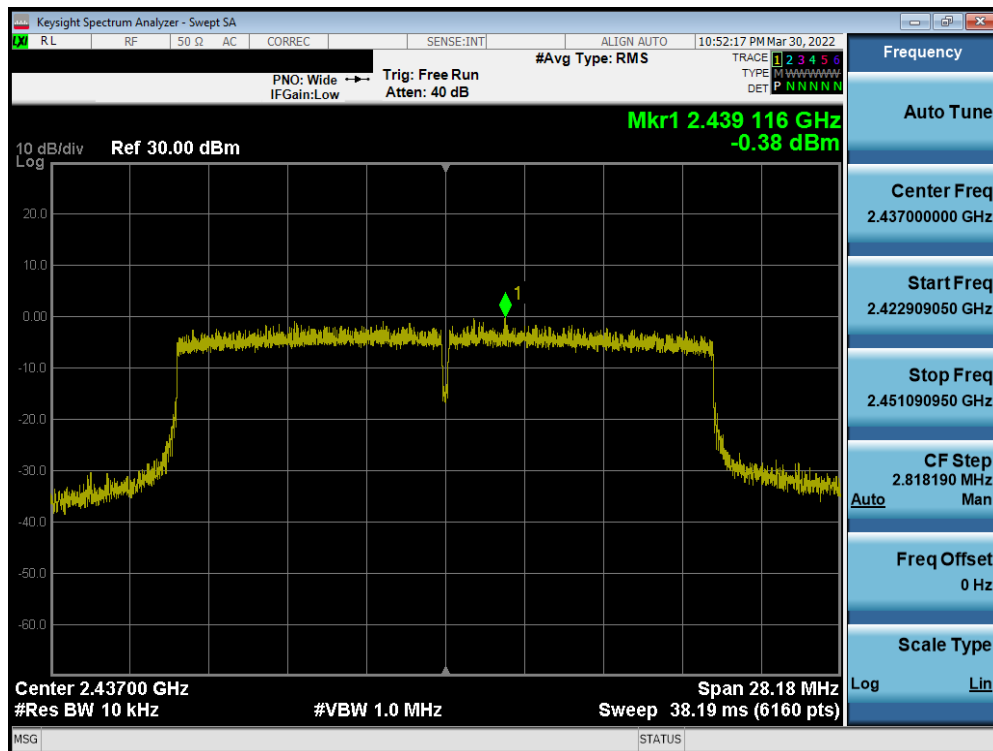


Plot 7-65. Power Spectral Density Plot SISO ANT2 (802.11ax 20MHz (2.4GHz) – Ch. 6)

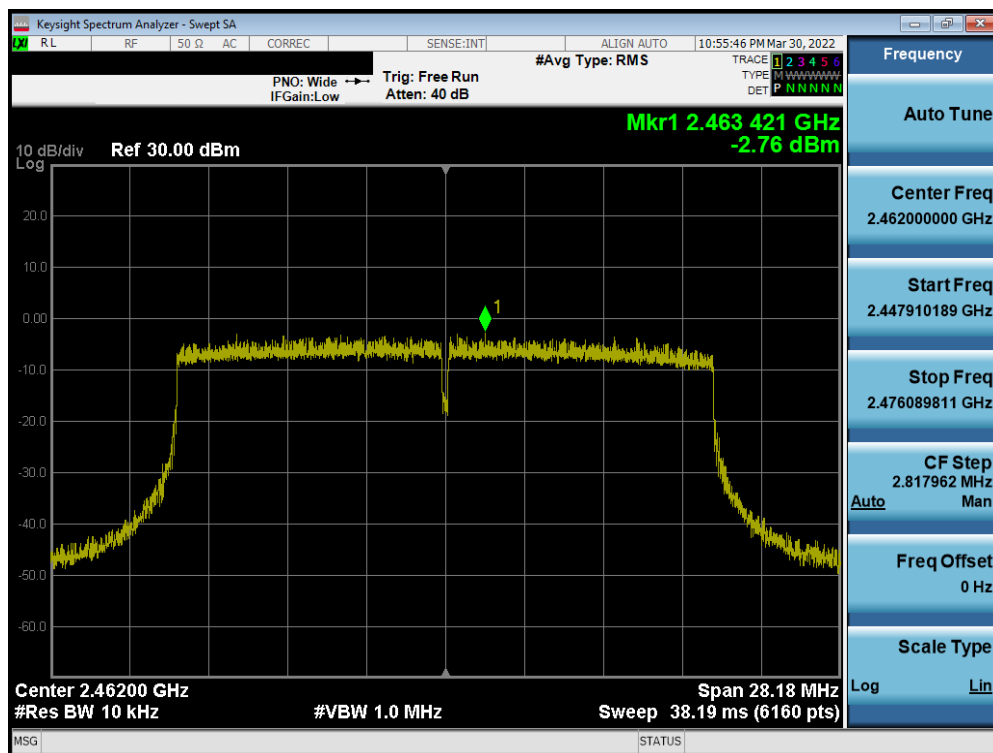


Plot 7-66. Power Spectral Density Plot SISO ANT2 (802.11ax 20MHz (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 60 of 164

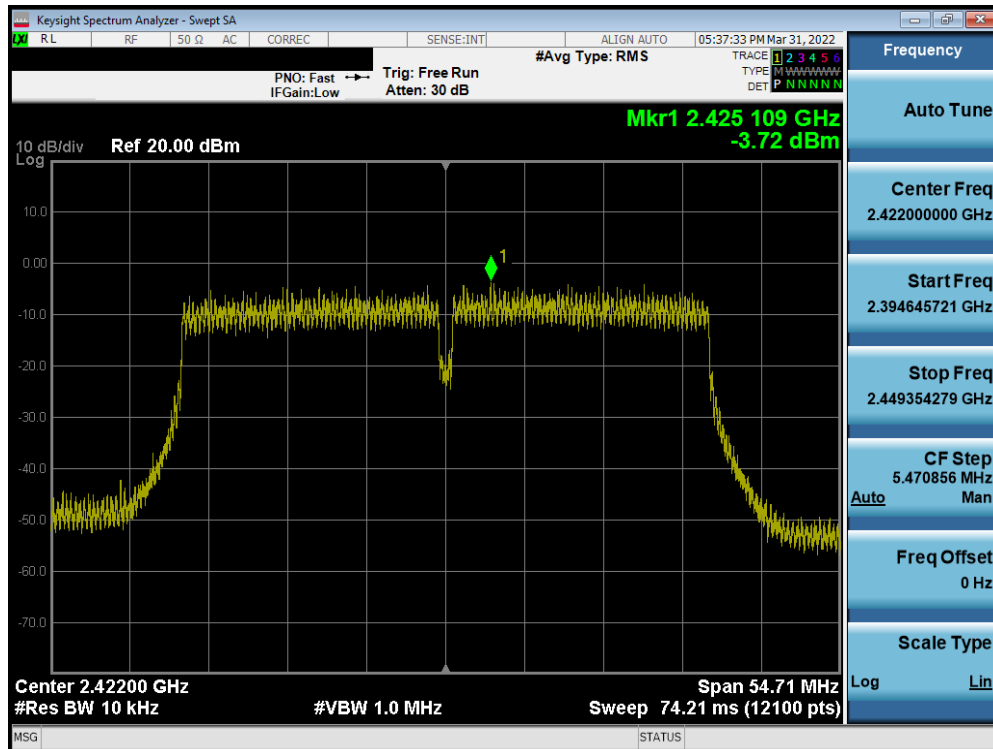


Plot 7-67. Power Spectral Density Plot SISO ANT2 (802.11n 40MHz (2.4GHz) – Ch. 3)

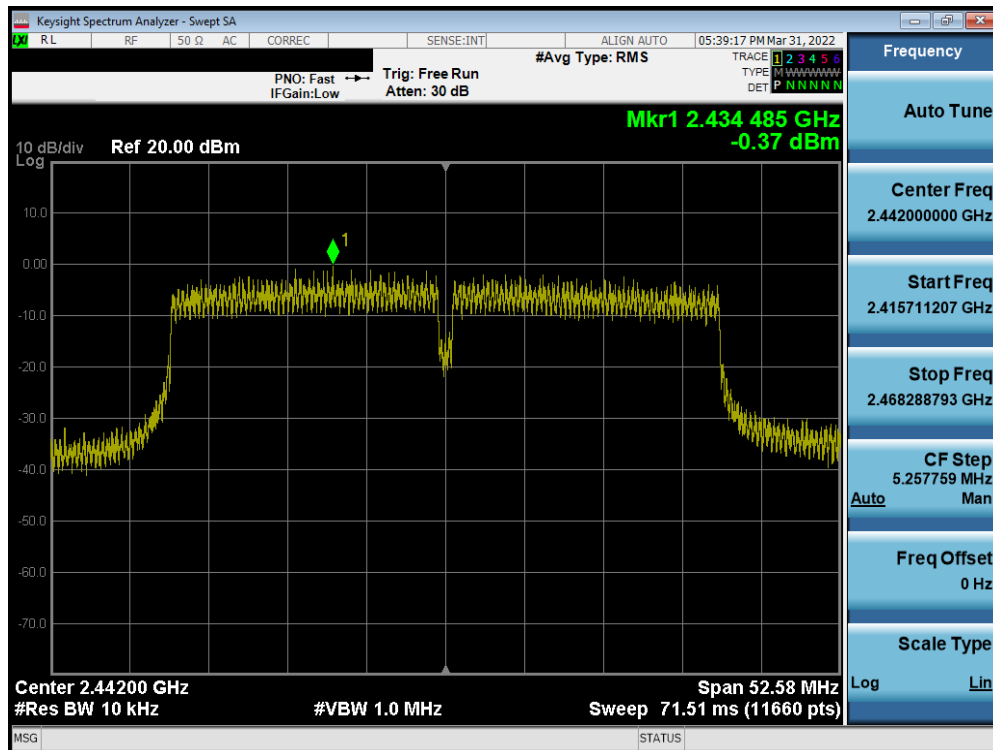


Plot 7-68. Power Spectral Density Plot SISO ANT2 (802.11n 40MHz (2.4GHz) – Ch. 7)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 61 of 164

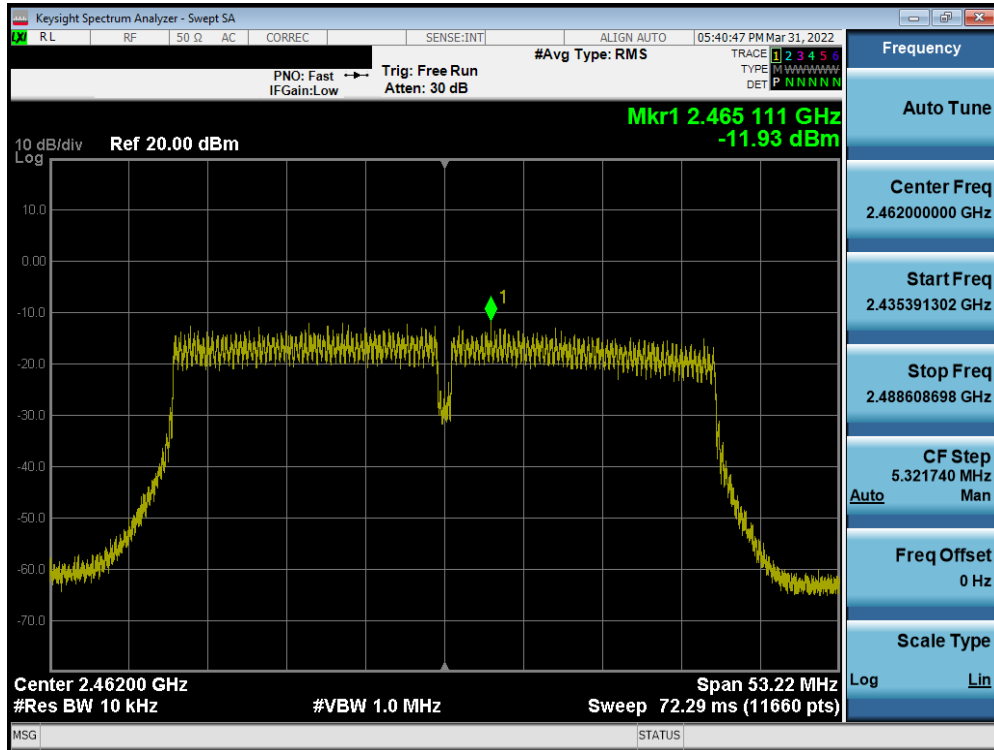


Plot 7-69. Power Spectral Density Plot SISO ANT2 (802.11n 40MHz (2.4GHz) – Ch. 11)

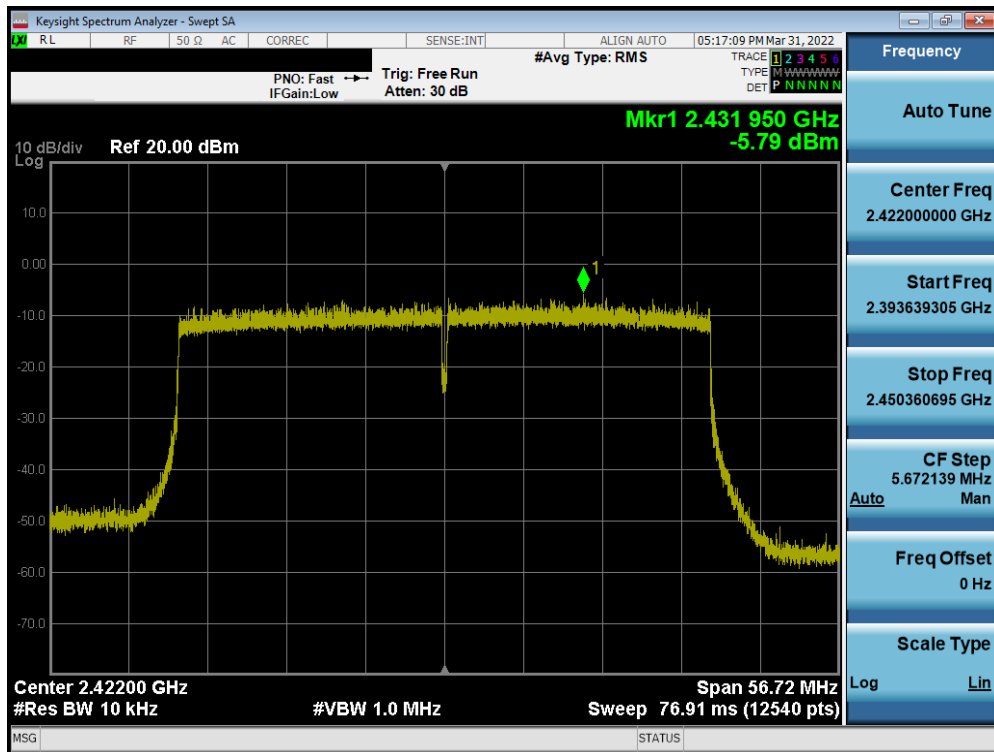


Plot 7-70. Power Spectral Density Plot SISO ANT2 (802.11ax 40MHz (2.4GHz) – Ch. 3)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 62 of 164

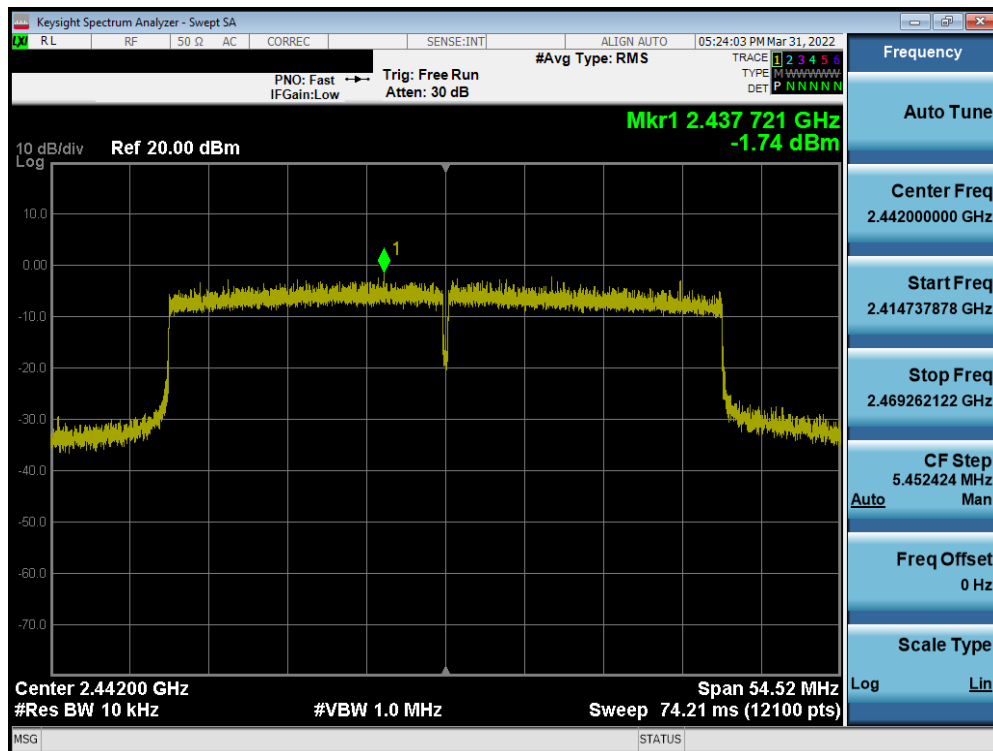

Plot 7-71. Power Spectral Density Plot SISO ANT2 (802.11ax 40MHz (2.4GHz) – Ch. 7)

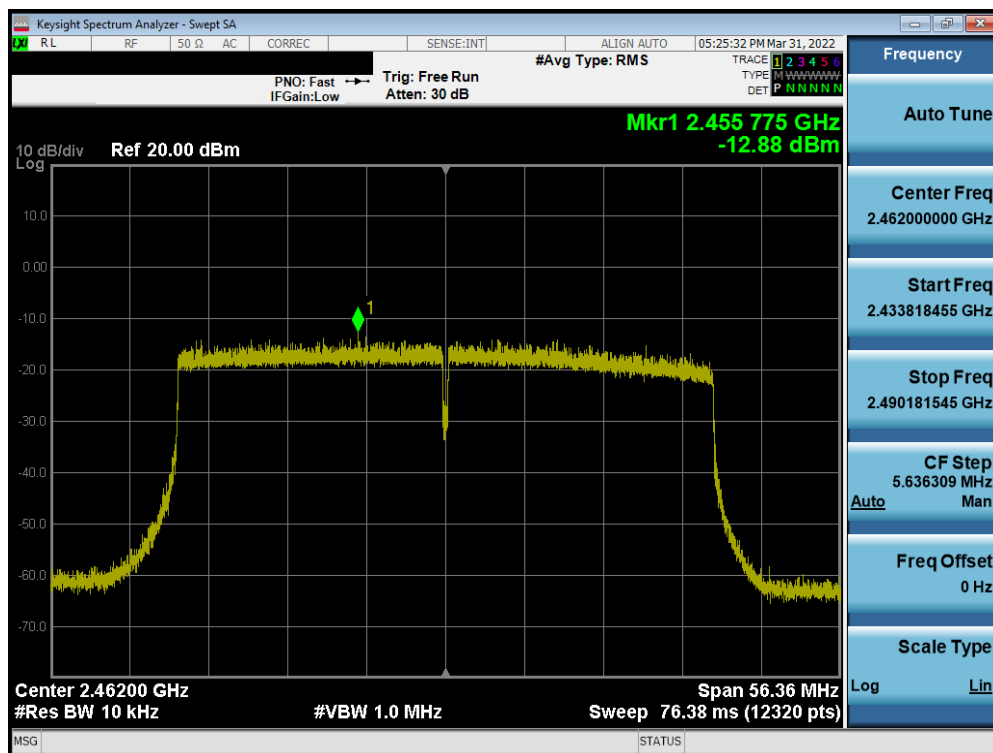

Plot 7-72. Power Spectral Density Plot SISO ANT2 (802.11ax 40MHz (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 63 of 164

V9.0 02/01/2019

MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	g	6	-2.13	-0.74	1.63	8.00	-6.37	Pass
2437	6	g	6	-1.22	0.35	2.65	8.00	-5.35	Pass
2462	11	g	6	-2.88	-1.61	0.81	8.00	-7.19	Pass
2412	1	n (20MHz)	6.5/7.2 (MCS0)	-1.53	0.54	2.64	8.00	-5.36	Pass
2437	6	n (20MHz)	6.5/7.2 (MCS0)	0.07	2.82	4.67	8.00	-3.33	Pass
2462	11	n (20MHz)	6.5/7.2 (MCS0)	-0.89	-0.85	2.14	8.00	-5.86	Pass
2412	1	ax (20MHz)	8/8.6 (MCS0)	-3.82	-3.27	-0.53	8.00	-8.53	Pass
2437	6	ax (20MHz)	8/8.6 (MCS0)	-0.64	-0.38	2.50	8.00	-5.50	Pass
2462	11	ax (20MHz)	8/8.6 (MCS0)	-2.40	-2.76	0.44	8.00	-7.56	Pass
2422	3	n (40MHz)	13/14.4 (MCS0)	-4.83	-3.72	-1.23	8.00	-9.23	Pass
2442	7	n (40MHz)	13/14.4 (MCS0)	-1.47	-0.37	2.13	8.00	-5.87	Pass
2462	11	n (40MHz)	13/14.4 (MCS0)	-12.70	-11.93	-9.29	8.00	-17.29	Pass
2422	3	ax (40MHz)	16/17.2 (MCS0)	-7.99	-5.79	-3.74	8.00	-11.74	Pass
2442	7	ax (40MHz)	16/17.2 (MCS0)	-1.75	-1.74	1.26	8.00	-6.74	Pass
2462	11	ax (40MHz)	16/17.2 (MCS0)	-13.66	-12.88	-10.24	8.00	-18.24	Pass

Table 7-16. MIMO Conducted Power Density Measurements

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 64 of 164

V9.0 02/01/2019

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -2.13 dBm for Antenna 1 and -0.74 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(-2.13 \text{ dBm} + -0.74 \text{ dBm}) = (0.61 \text{ mW} + 0.84 \text{ mW}) = 1.46 \text{ mW} = 1.63 \text{ dBm}$$

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 65 of 164

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5/7.2Mbps for “n” mode, and 8.6Mbps for “ax” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 66 of 164


V9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Antenna-1 Conducted Emissions at the Band Edge

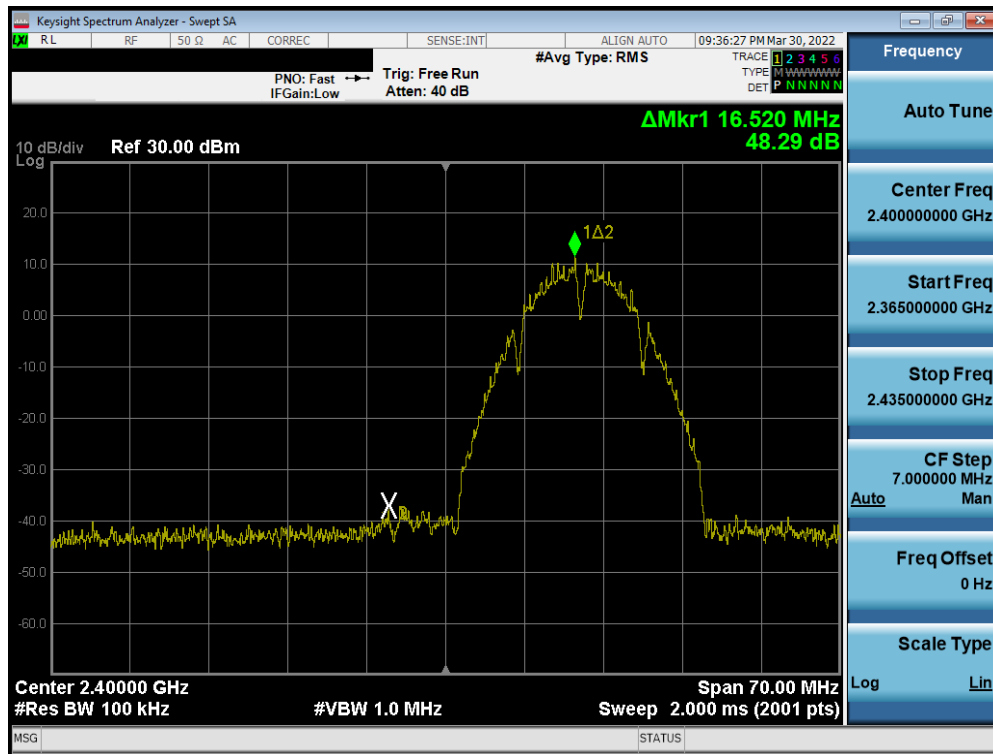


Plot 7-73. Band Edge Plot SISO ANT1 (802.11b – Ch. 1)

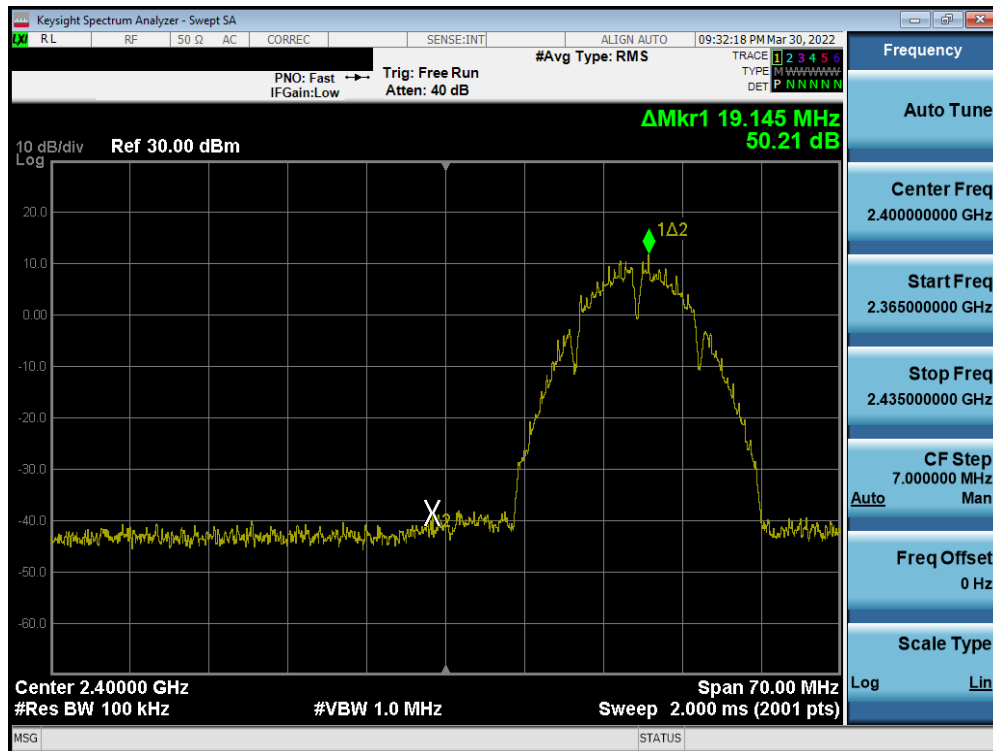


Plot 7-74. Band Edge Plot SISO ANT1 (802.11b – Ch. 2)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 67 of 164

V9.0 02/01/2019

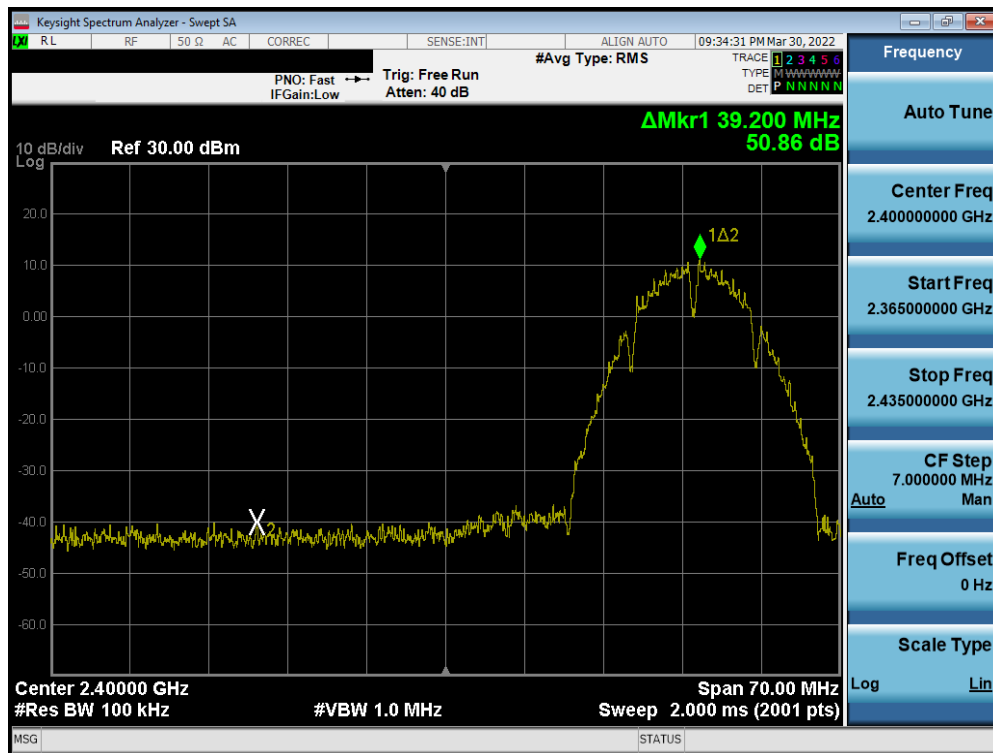


Plot 7-75. Band Edge Plot SISO ANT1 (802.11b – Ch. 3)

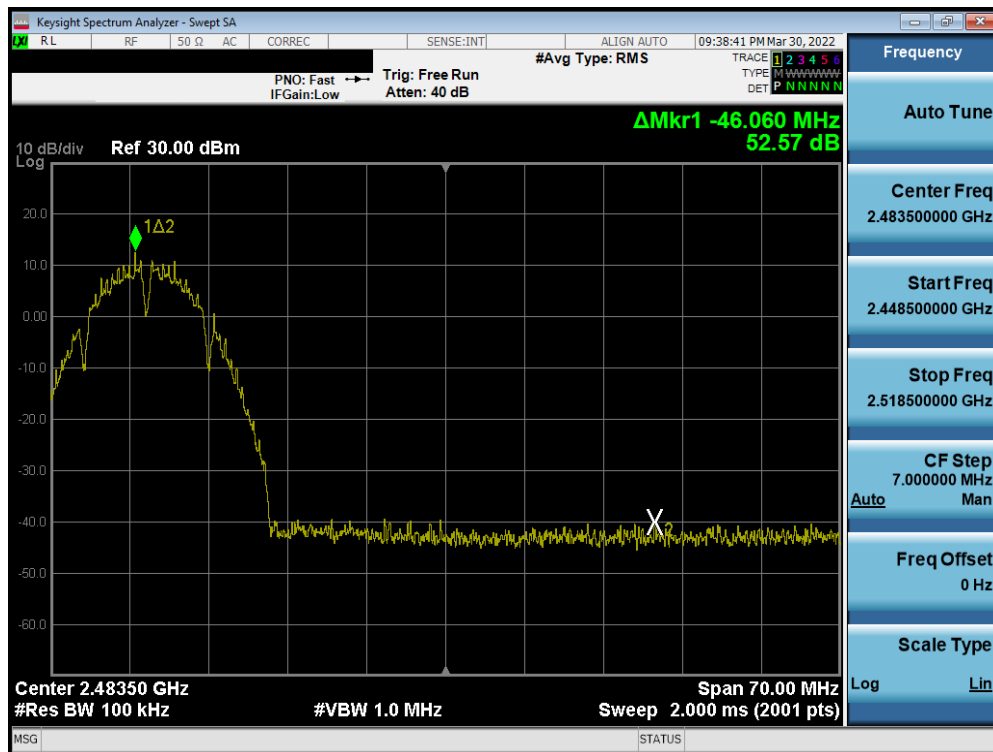


Plot 7-76. Band Edge Plot SISO ANT1 (802.11b – Ch. 10)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 68 of 164

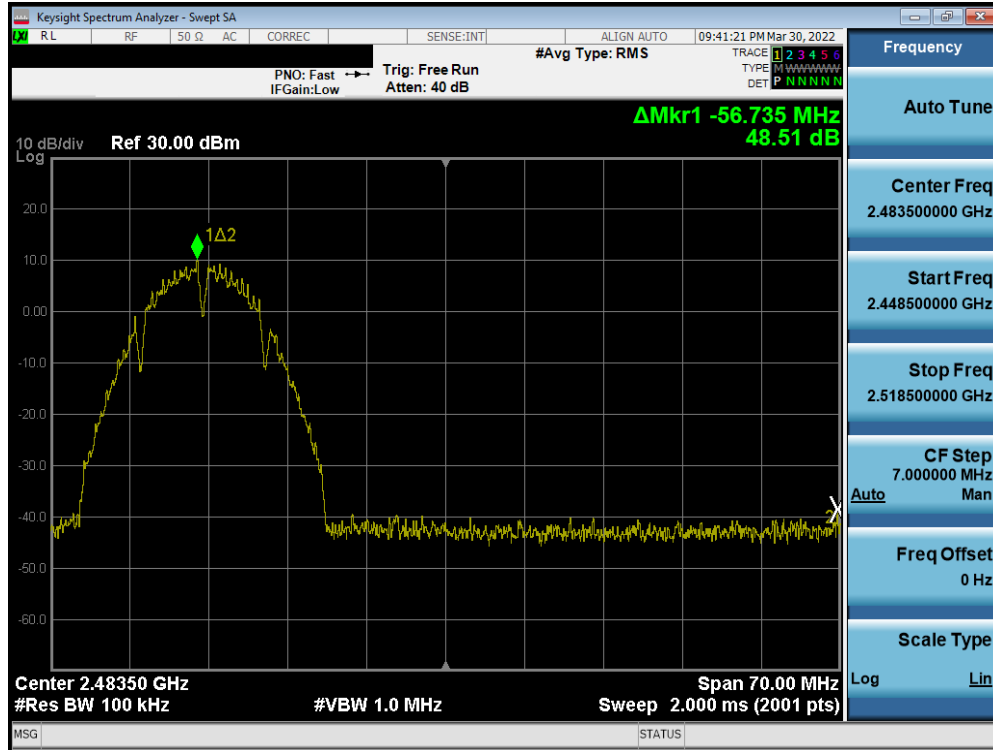


Plot 7-77. Band Edge Plot SISO ANT1 (802.11b – Ch. 11)

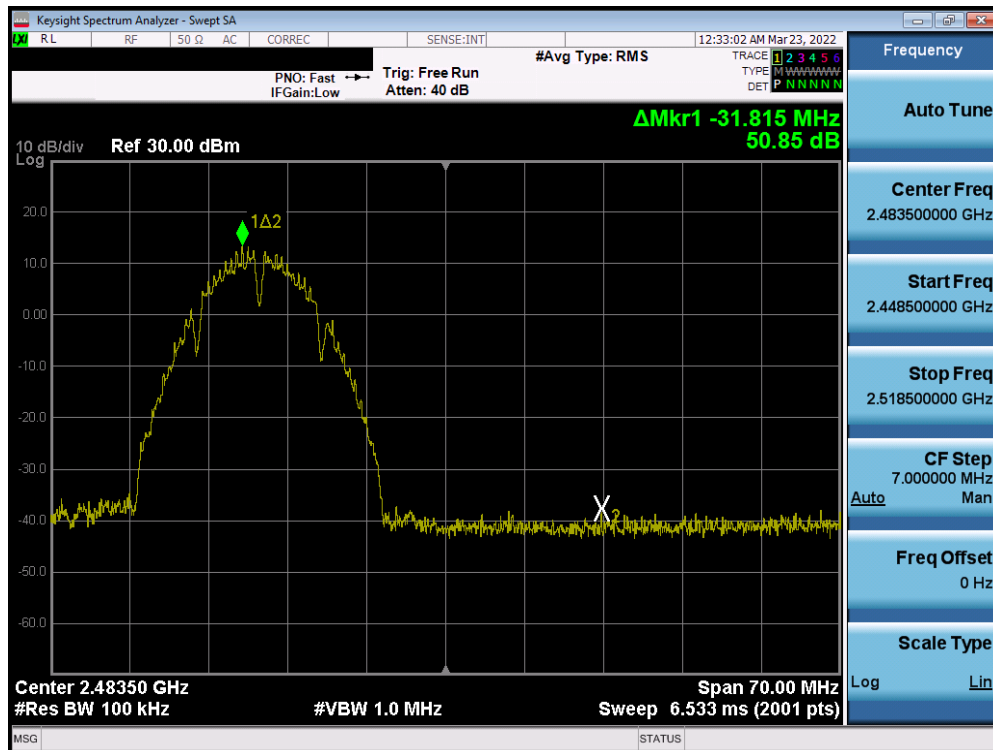


Plot 7-78. Band Edge Plot SISO ANT1 (802.11b – Ch. 12)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 69 of 164

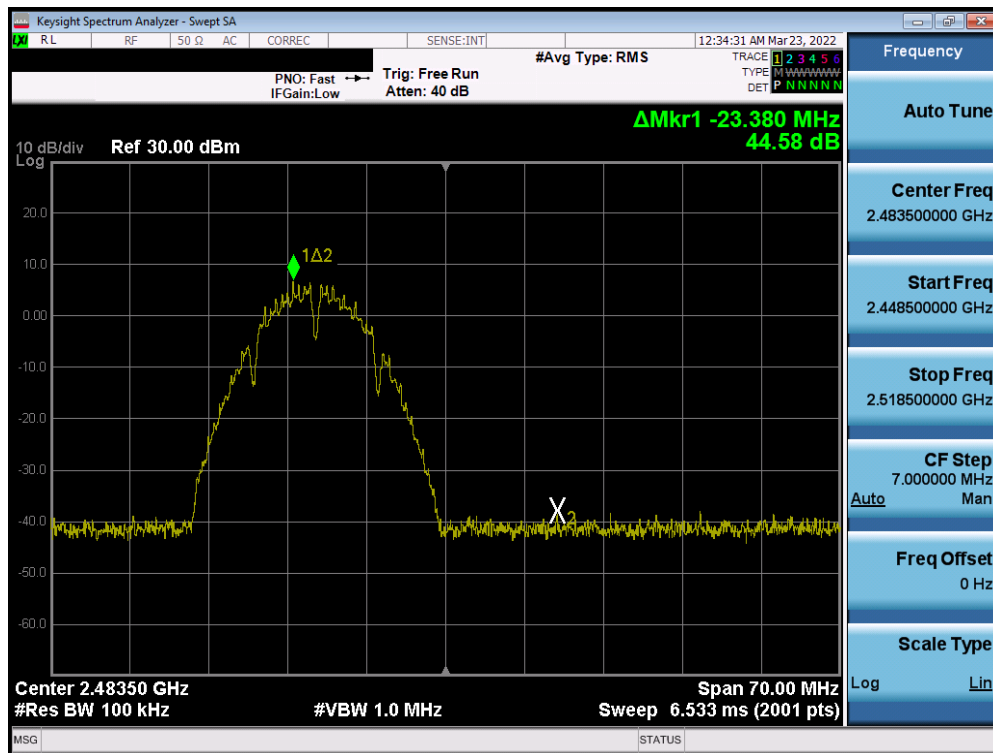


Plot 7-79. Band Edge Plot SISO ANT1 (802.11b – Ch. 13)

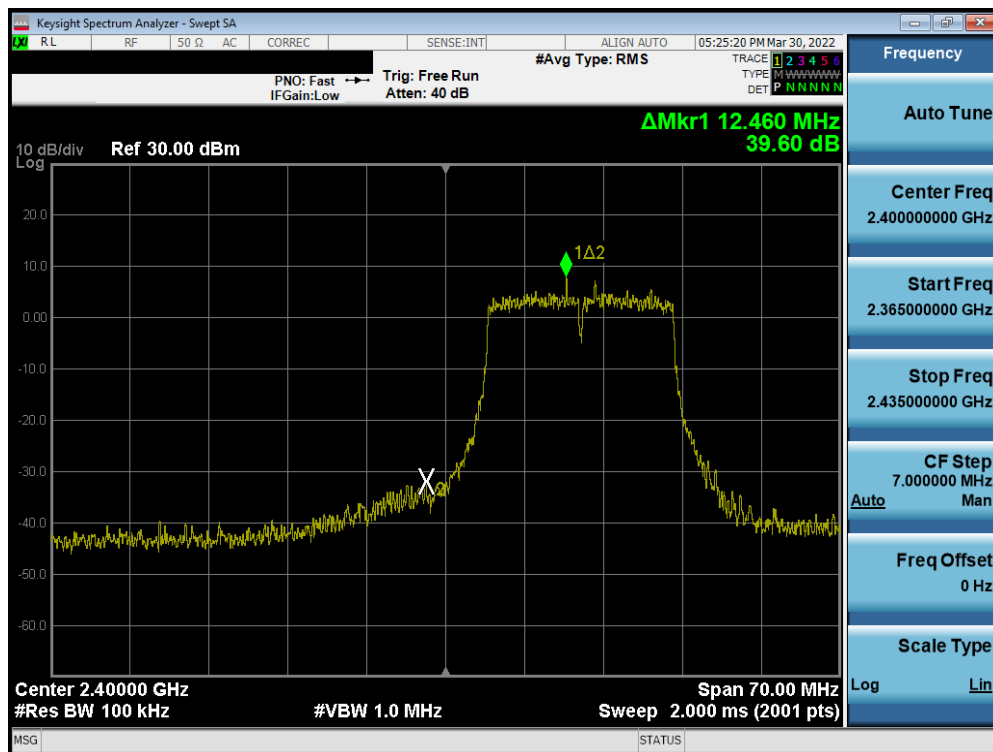


Plot 7-80. Band Edge Plot SISO ANT1 (802.11g– Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 70 of 164

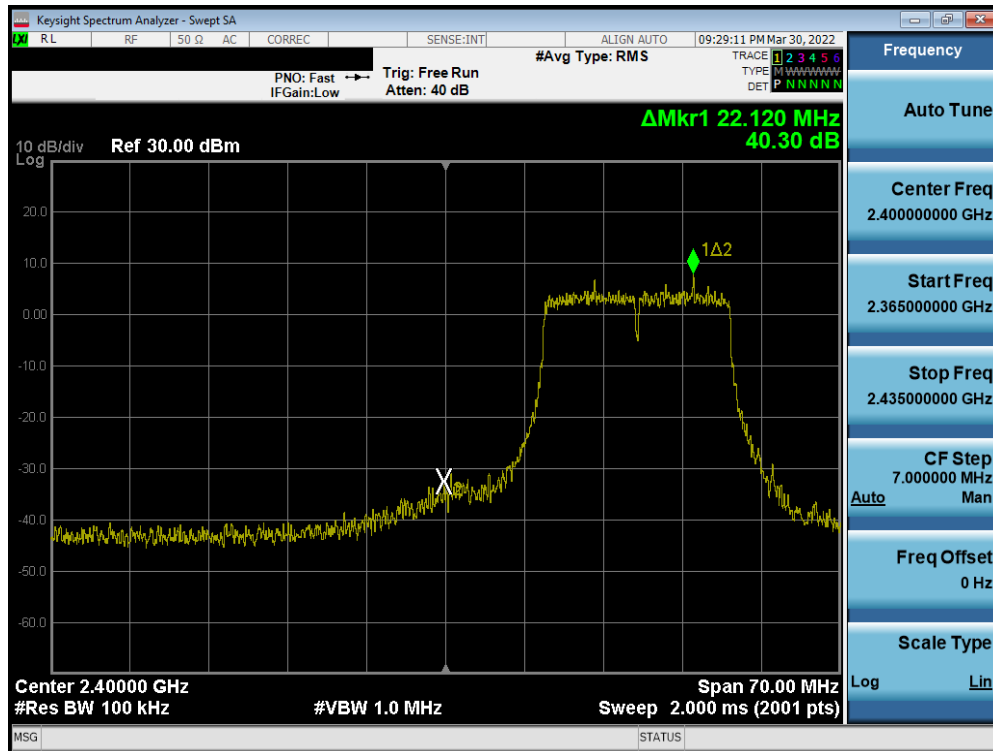


Plot 7-81. Band Edge Plot SISO ANT1 (802.11g- Ch. 2)

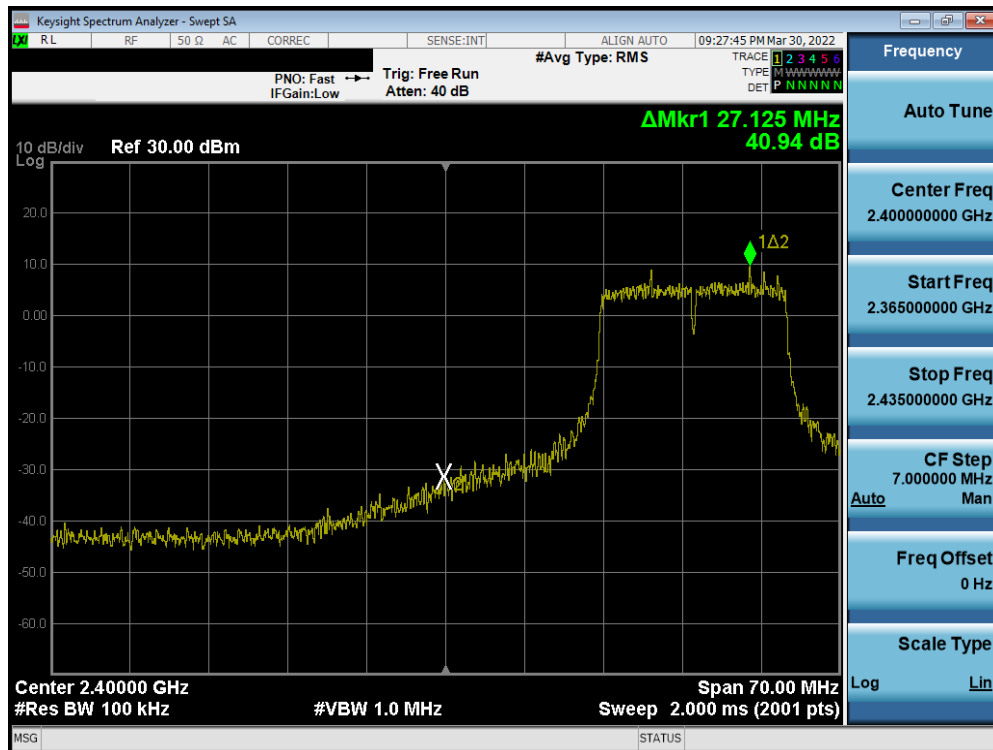


Plot 7-82. Band Edge Plot SISO ANT1 (802.11g- Ch. 3)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 71 of 164

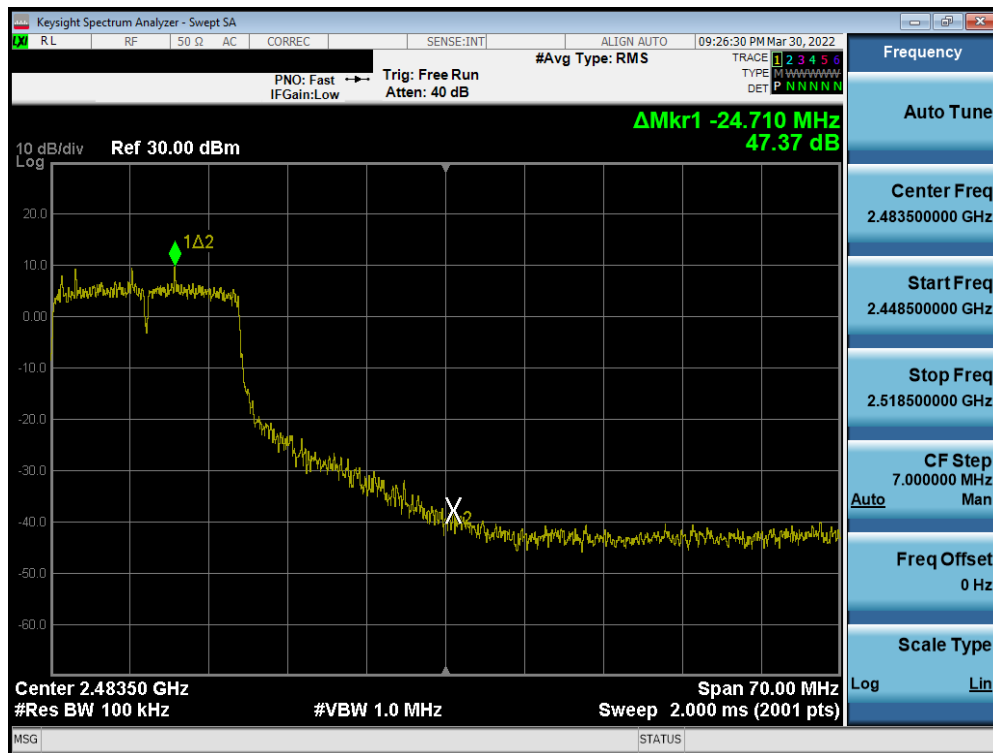


Plot 7-83. Band Edge Plot SISO ANT1 (802.11g – Ch. 10)

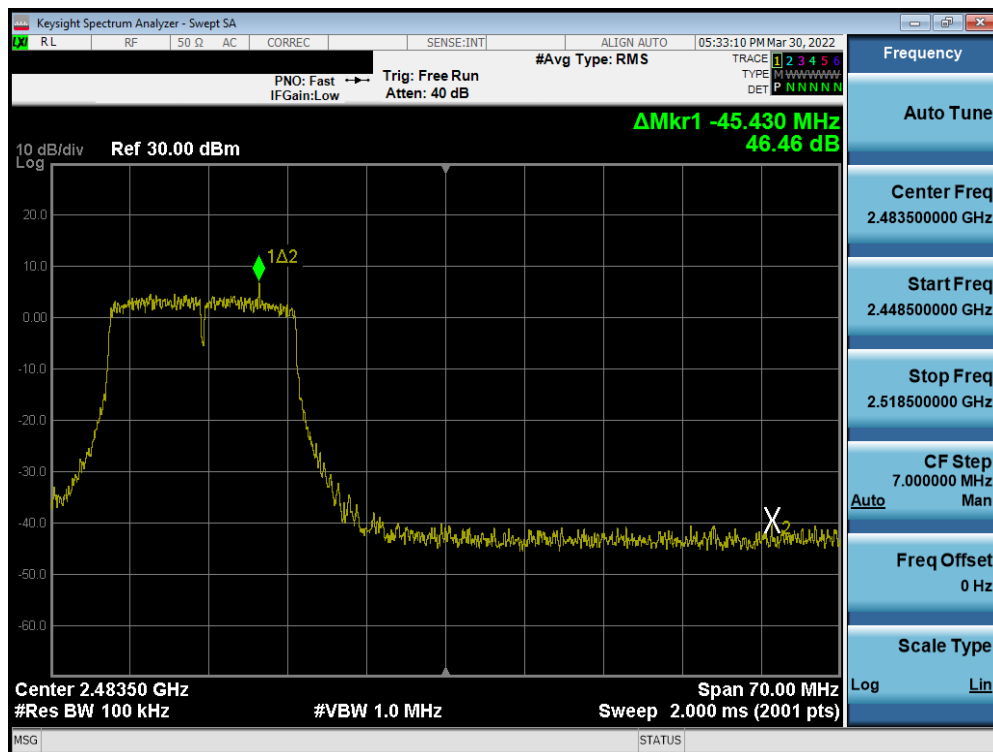


Plot 7-84. Band Edge Plot SISO ANT1 (802.11g – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 72 of 164

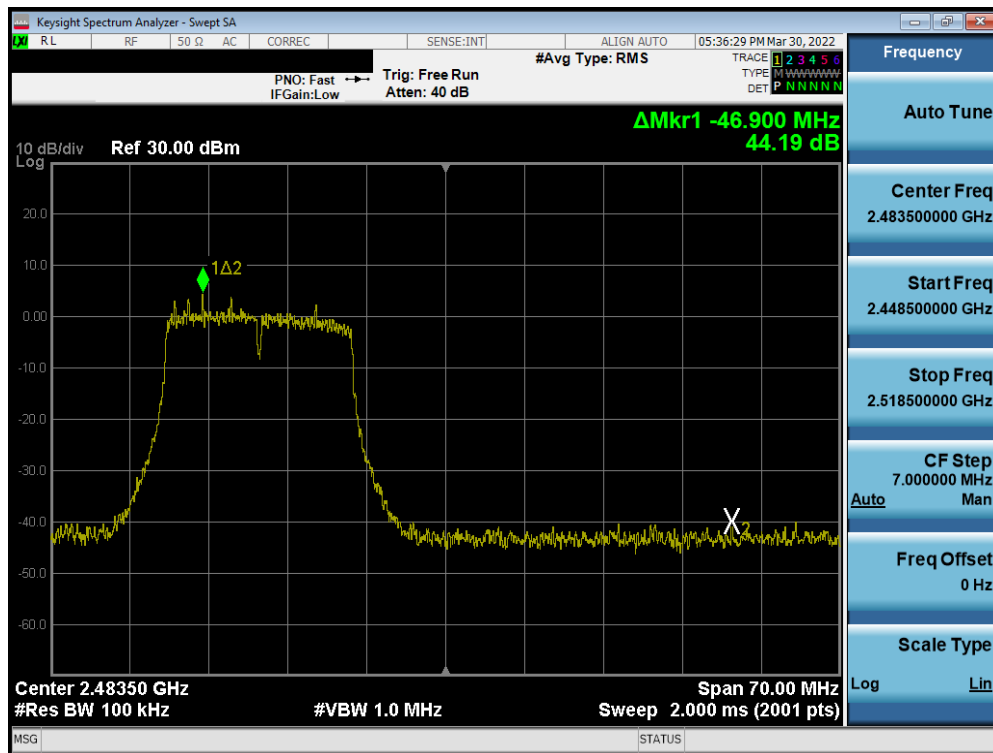


Plot 7-85. Band Edge Plot SISO ANT1 (802.11g – Ch. 12)

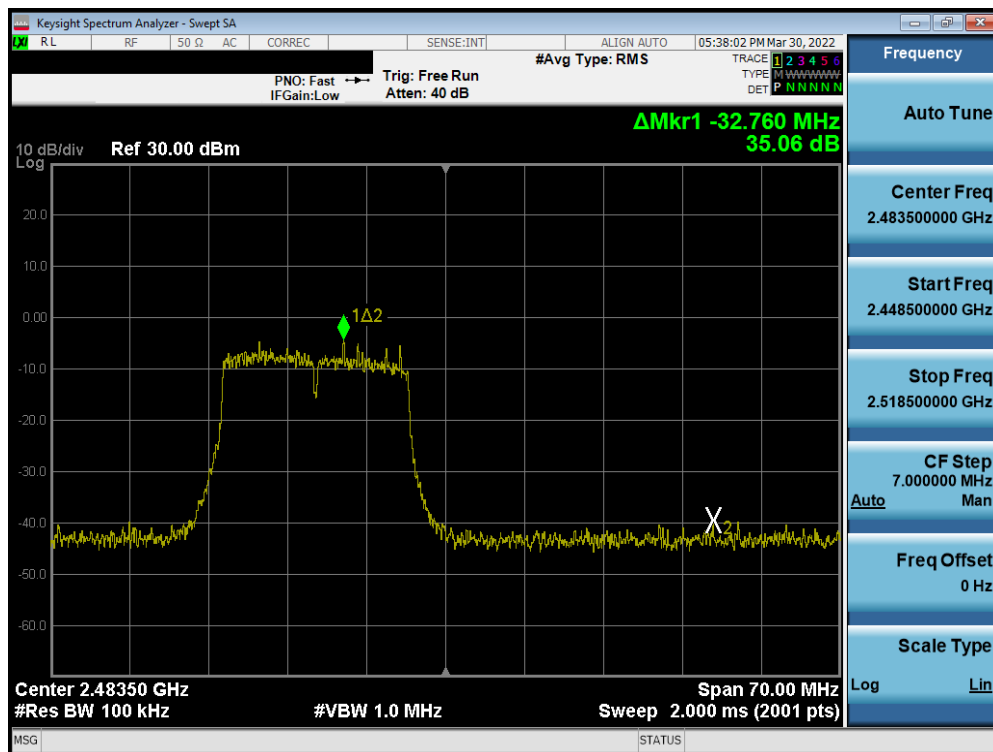


Plot 7-86. Band Edge Plot SISO ANT1 (802.11g – Ch. 13)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 73 of 164

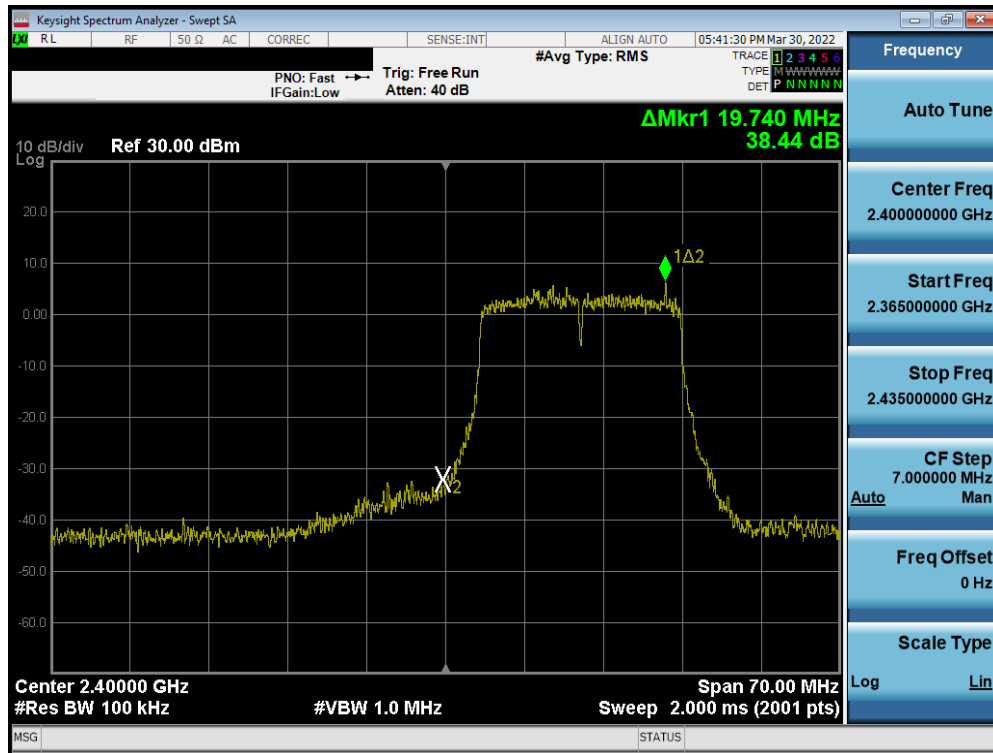


Plot 7-87. Band Edge Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 1)

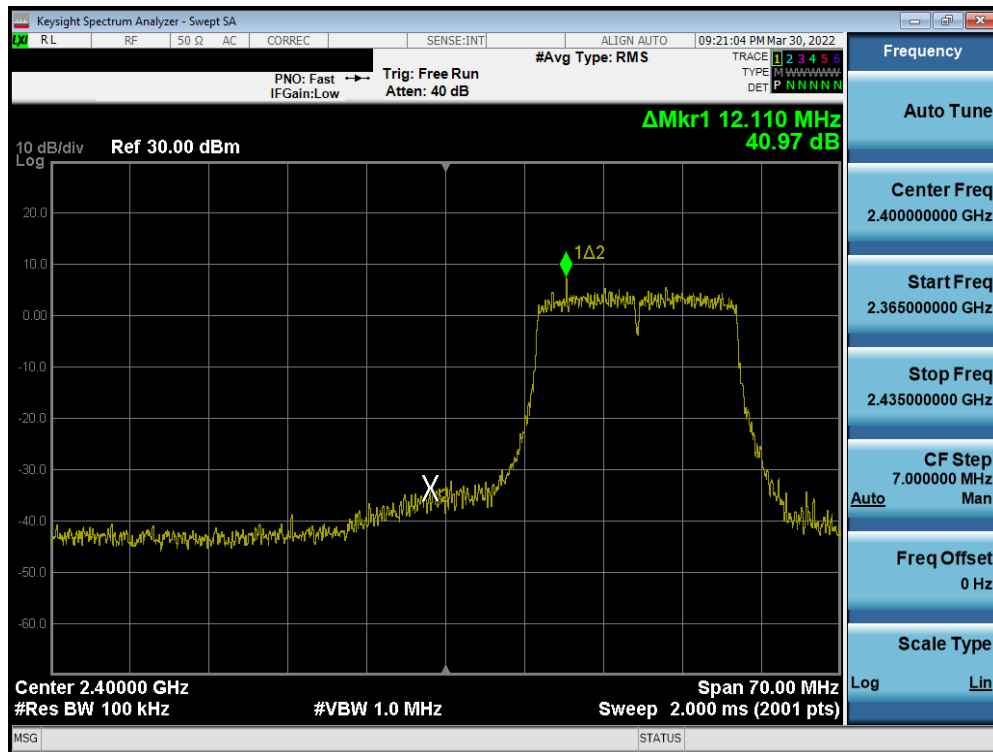


Plot 7-88. Band Edge Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 2)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 74 of 164

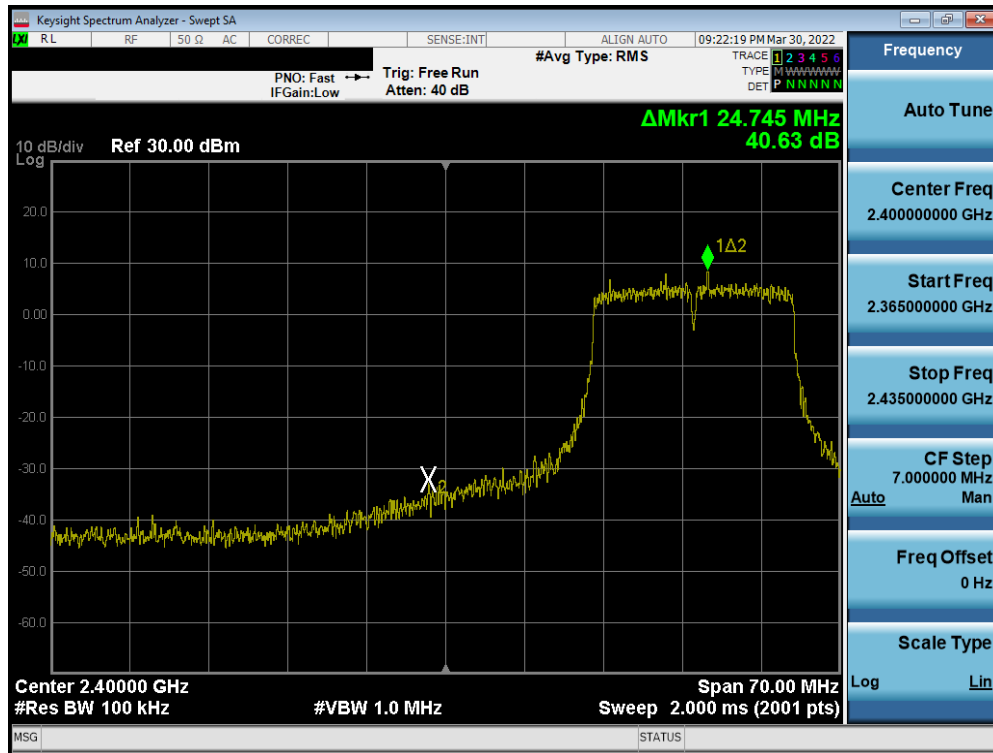


Plot 7-89. Band Edge Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 3)

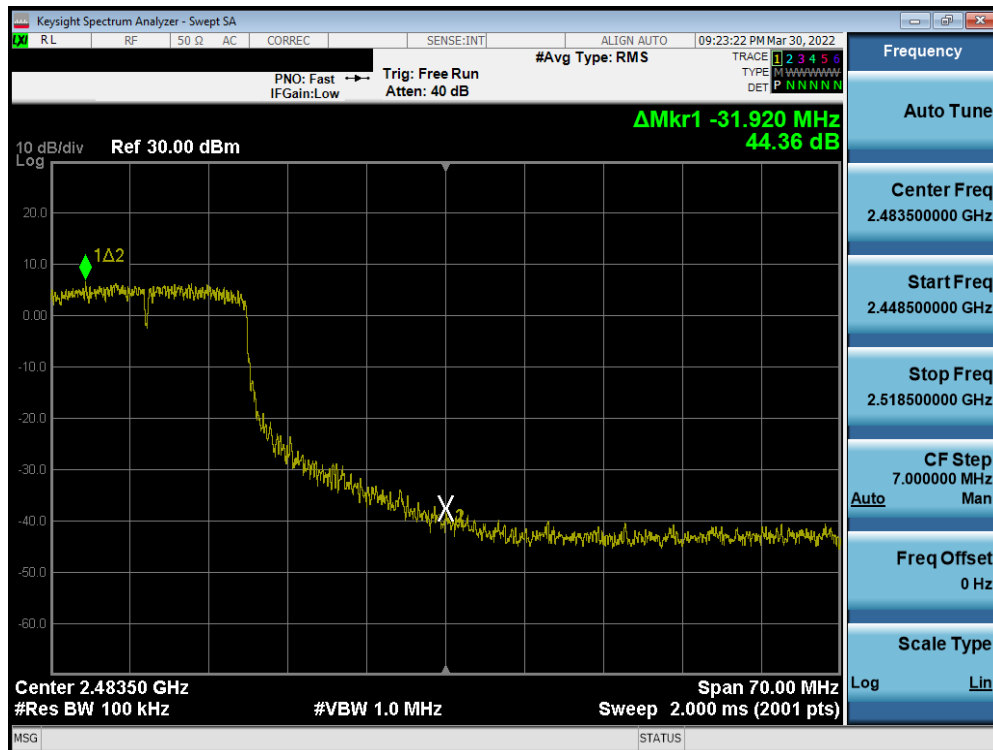


Plot 7-90. Band Edge Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 10)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 75 of 164

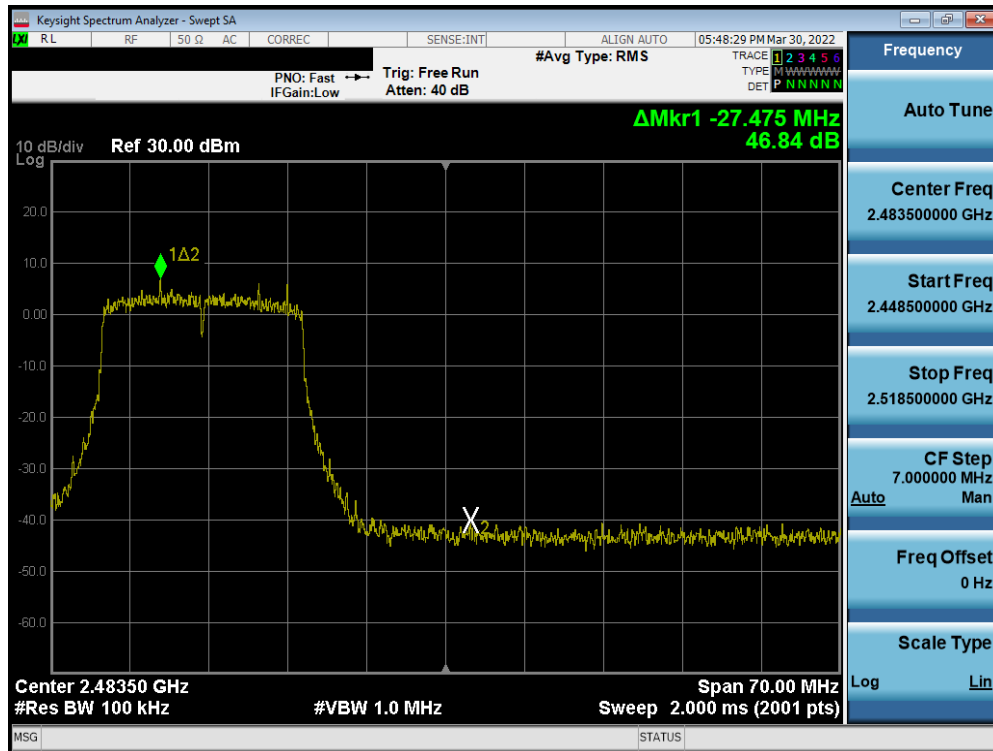


Plot 7-91. Band Edge Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 11)

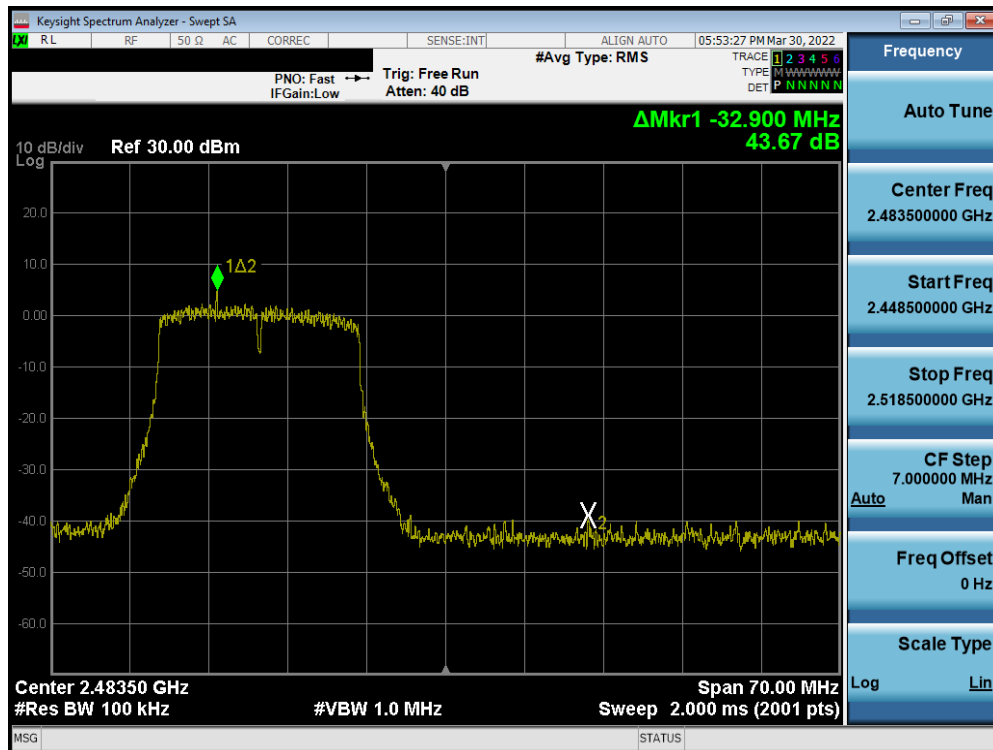


Plot 7-92. Band Edge Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 12)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 76 of 164

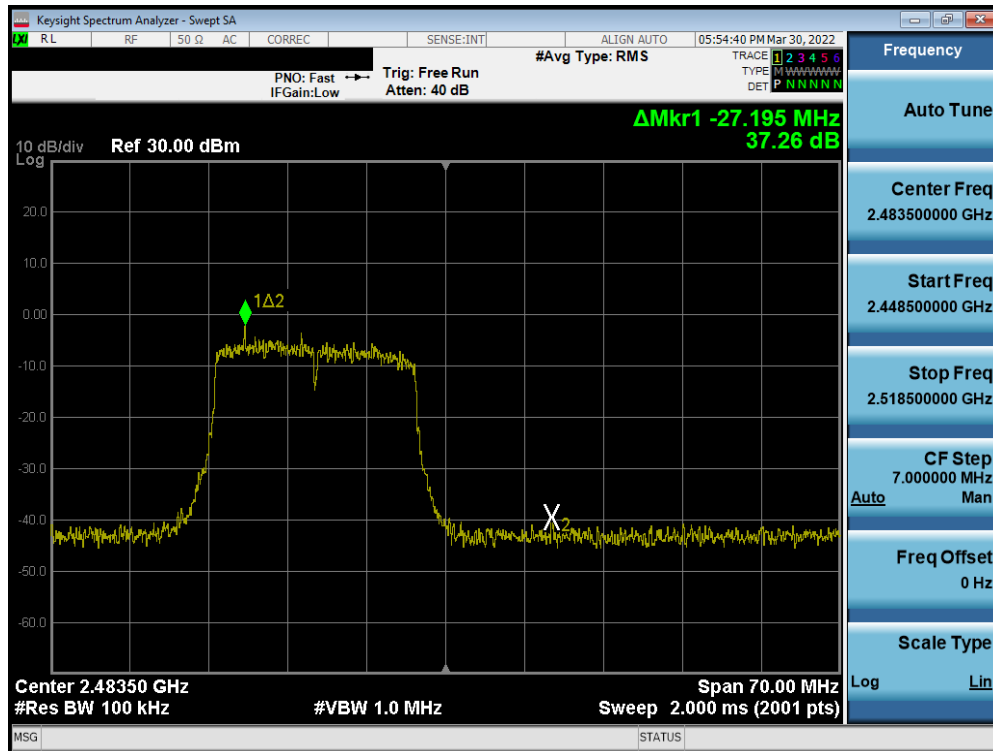


Plot 7-93. Band Edge Plot SISO ANT1 (802.11n 20MHz (2.4GHz) – Ch. 13)

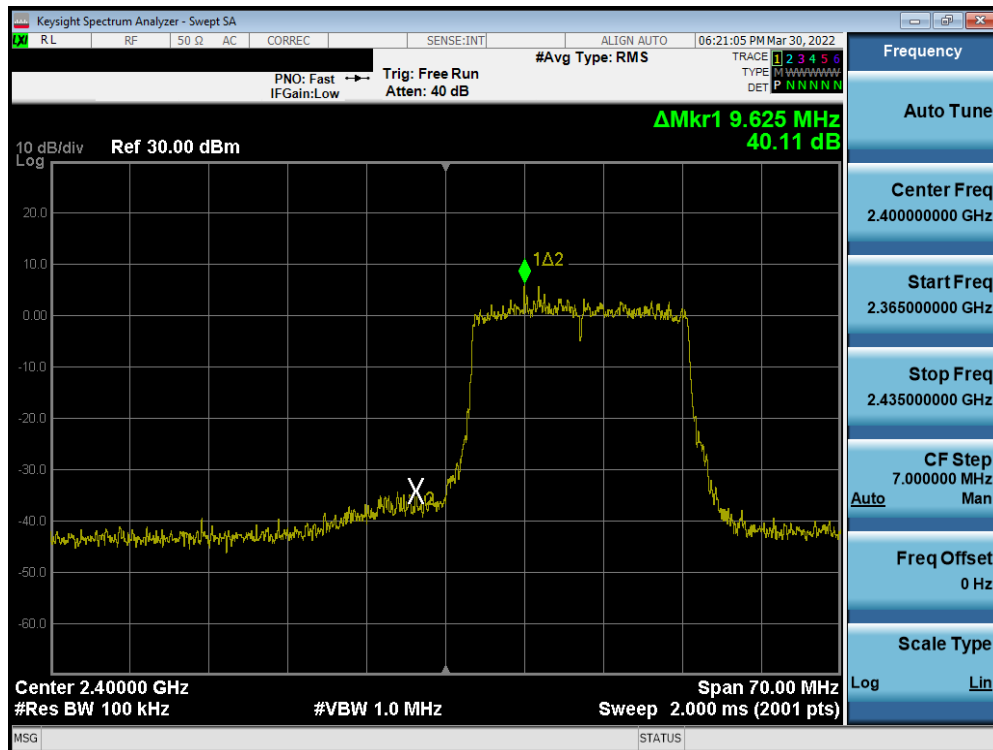


Plot 7-94. Band Edge Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 1)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 77 of 164

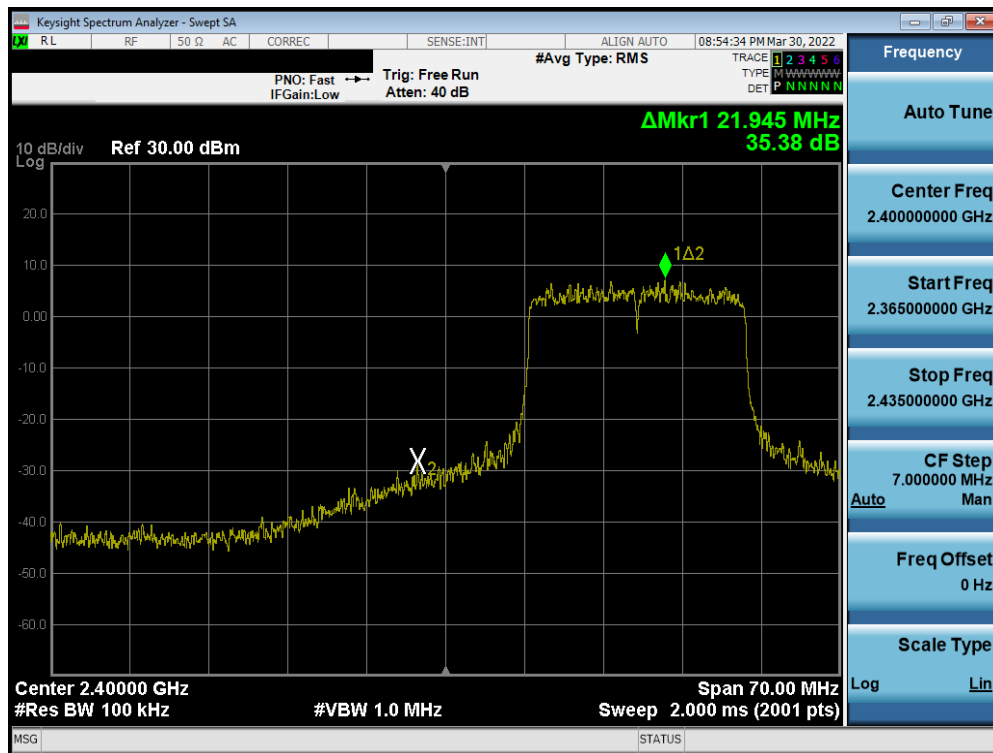


Plot 7-95. Band Edge Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 2)

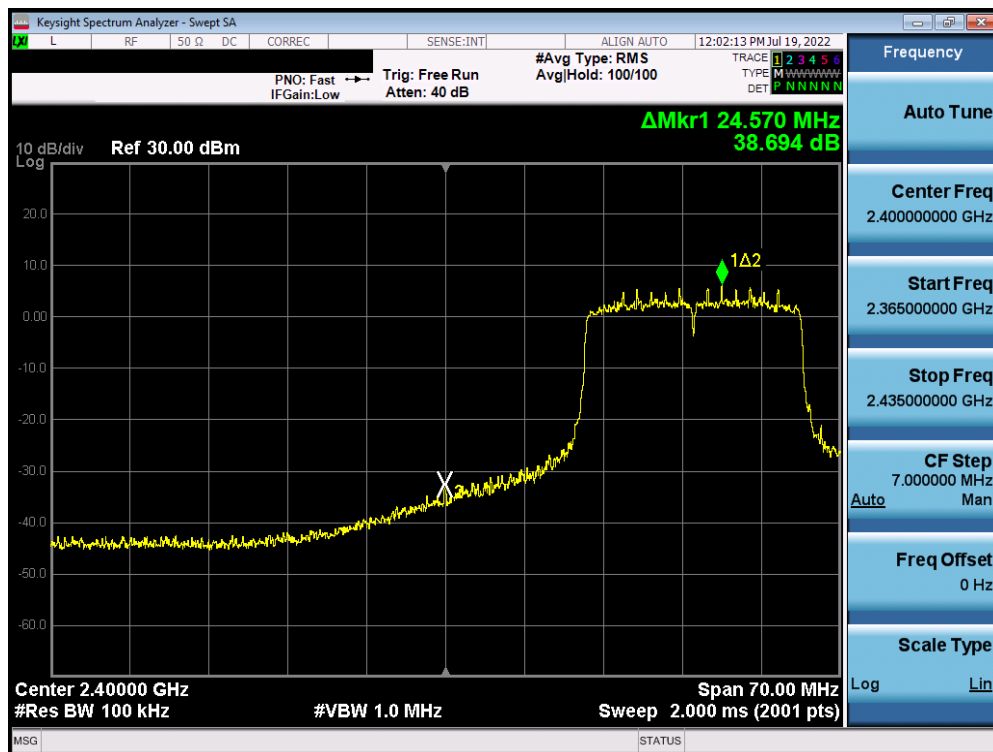


Plot 7-96. Band Edge Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 3)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 78 of 164

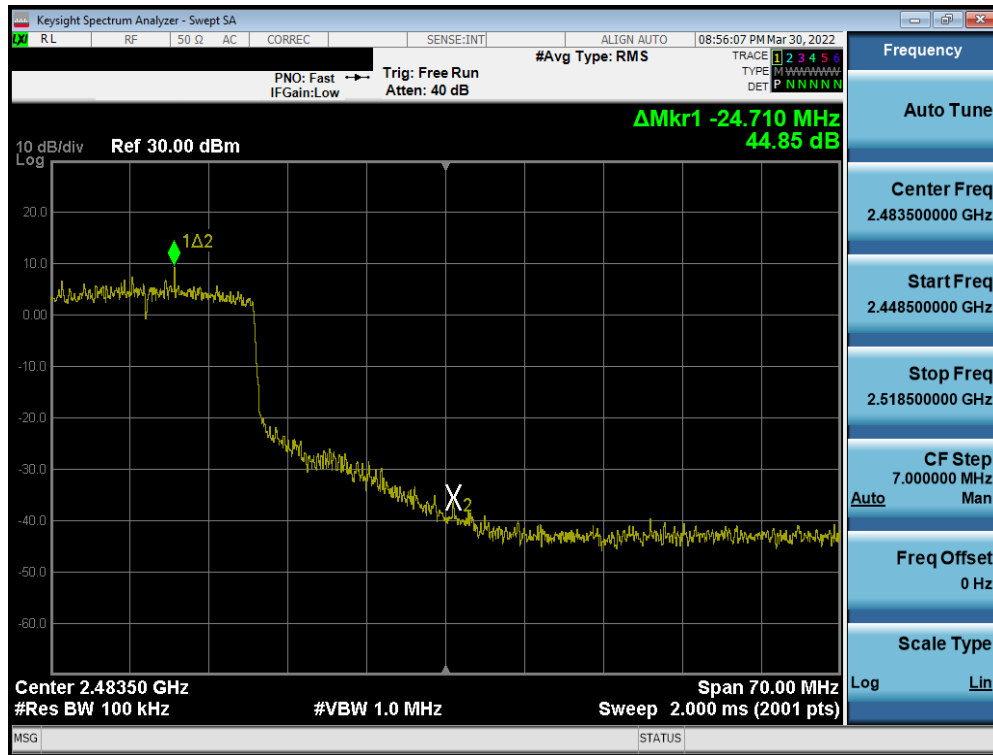


Plot 7-97. Band Edge Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 10)

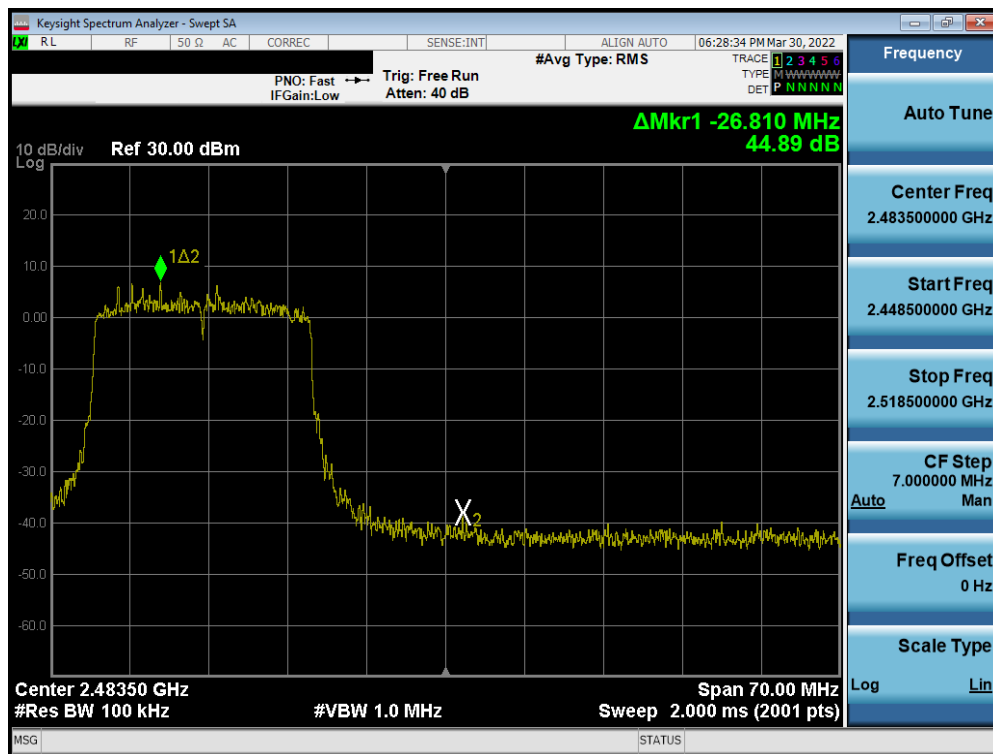


Plot 7-98. Band Edge Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 11)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 79 of 164

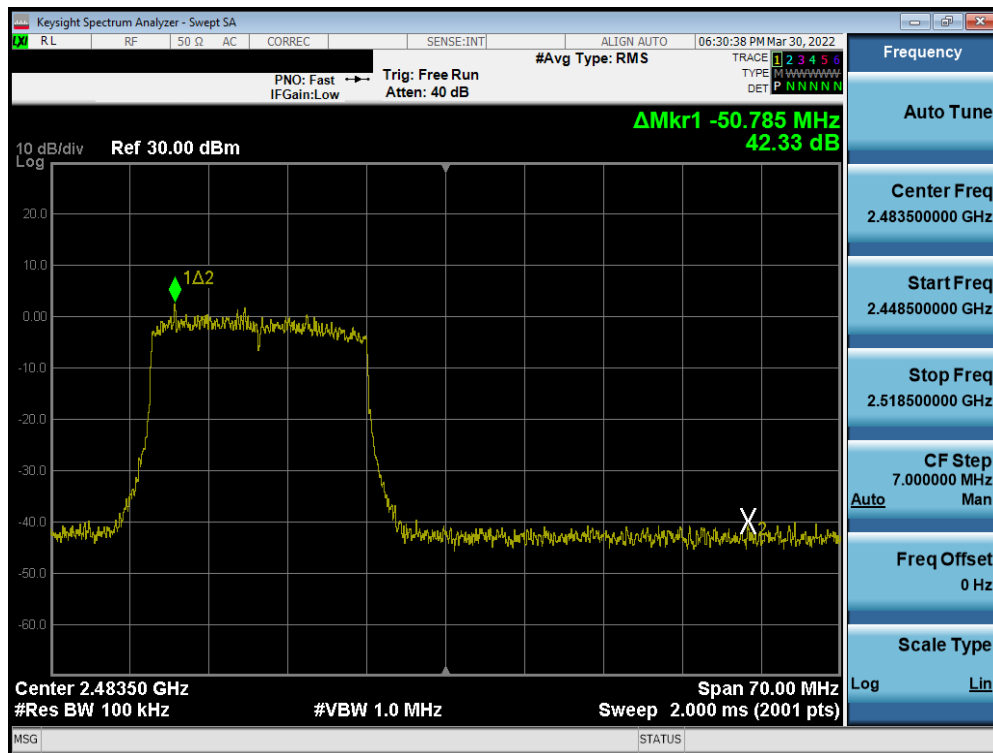


Plot 7-99. Band Edge Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 12)

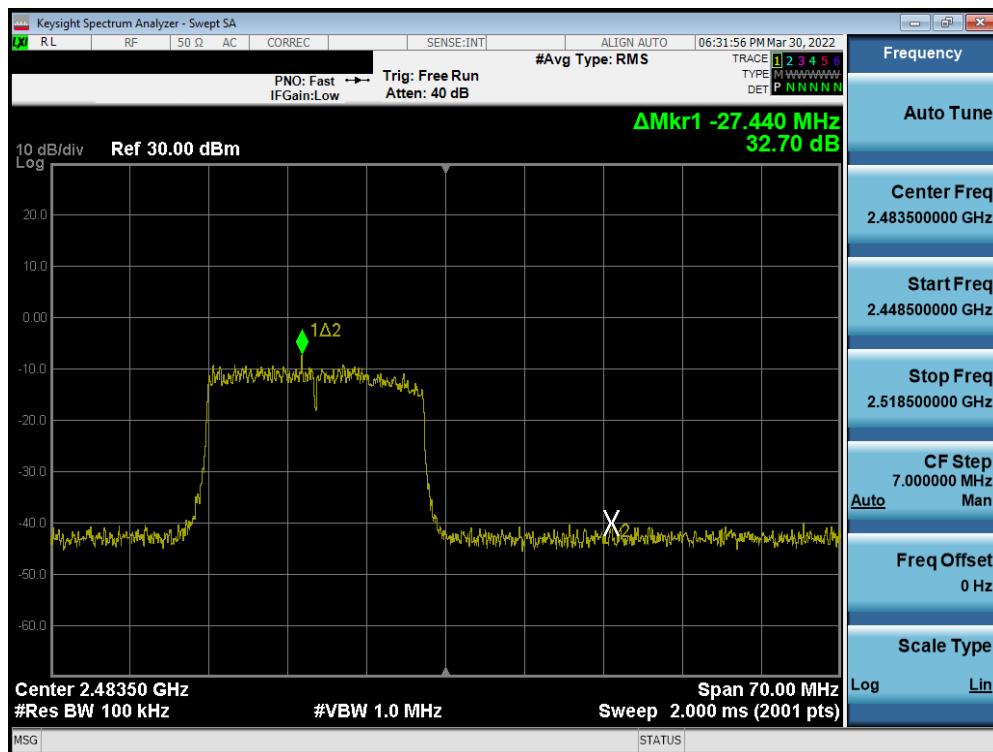


Plot 7-100. Band Edge Plot SISO ANT1 (802.11ax 20MHz (2.4GHz) – Ch. 13)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 80 of 164

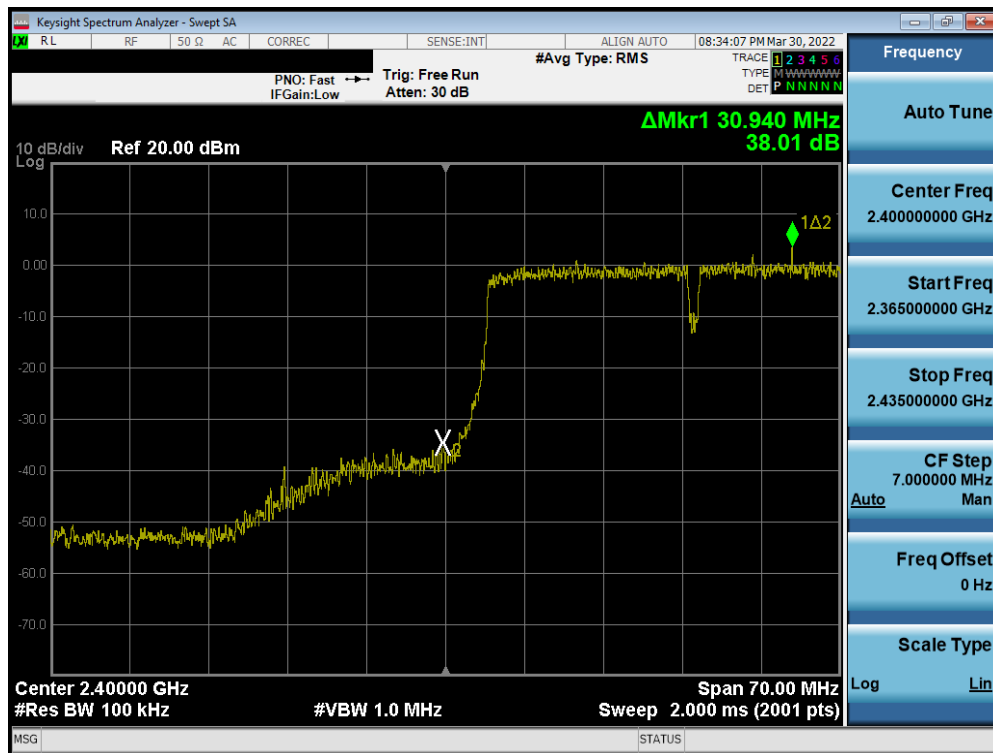


Plot 7-101. Band Edge Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 3)

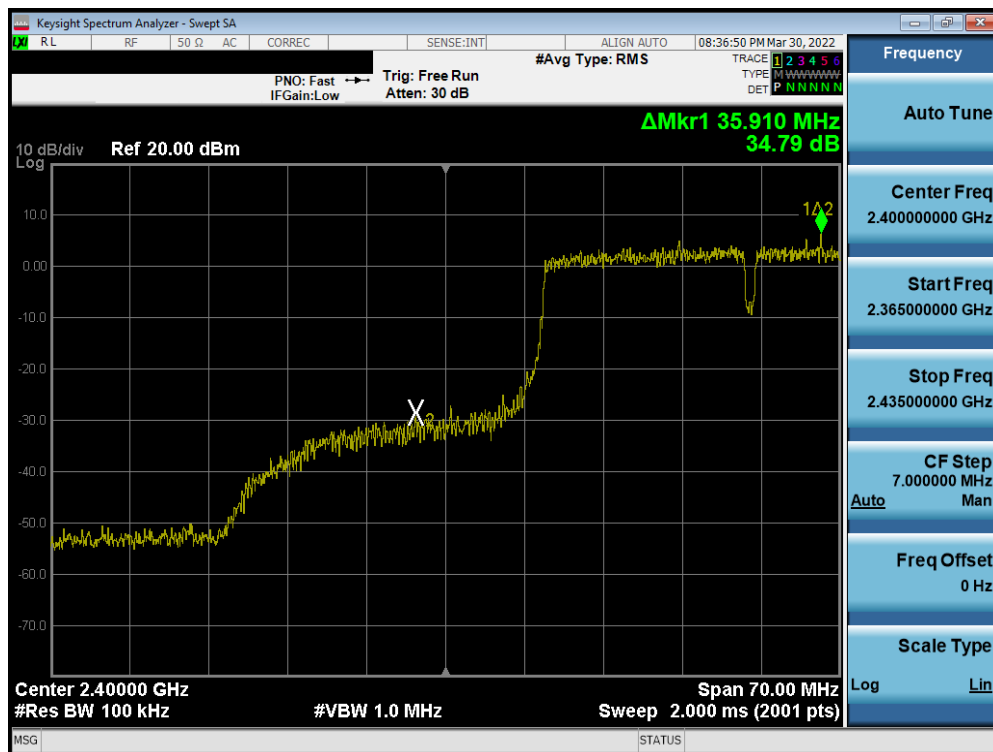


Plot 7-102. Band Edge Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 4)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 81 of 164


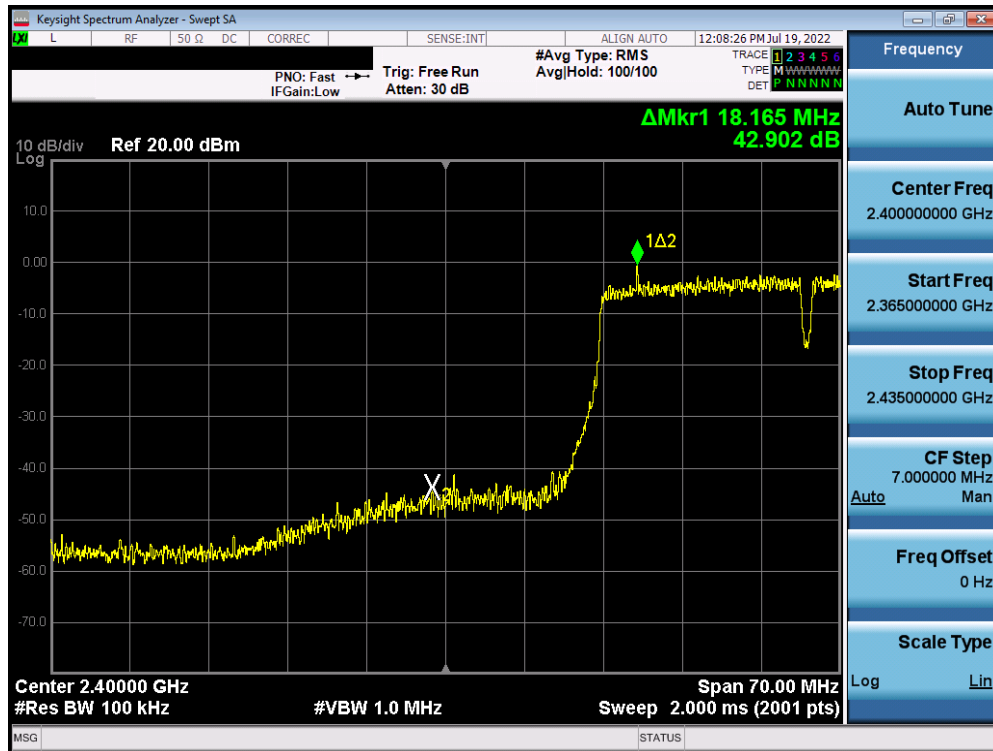


Plot 7-103. Band Edge Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 5)

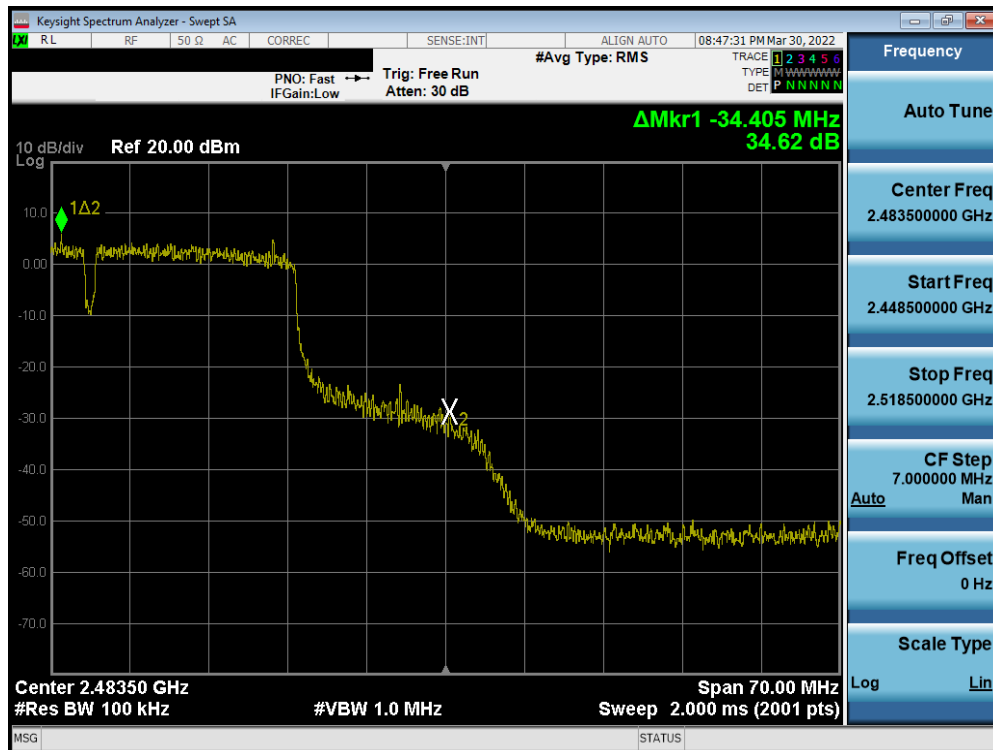


Plot 7-104. Band Edge Plot SISO ANT1 (802.11n 40MHz (2.4GHz) – Ch. 9)


FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 82 of 164

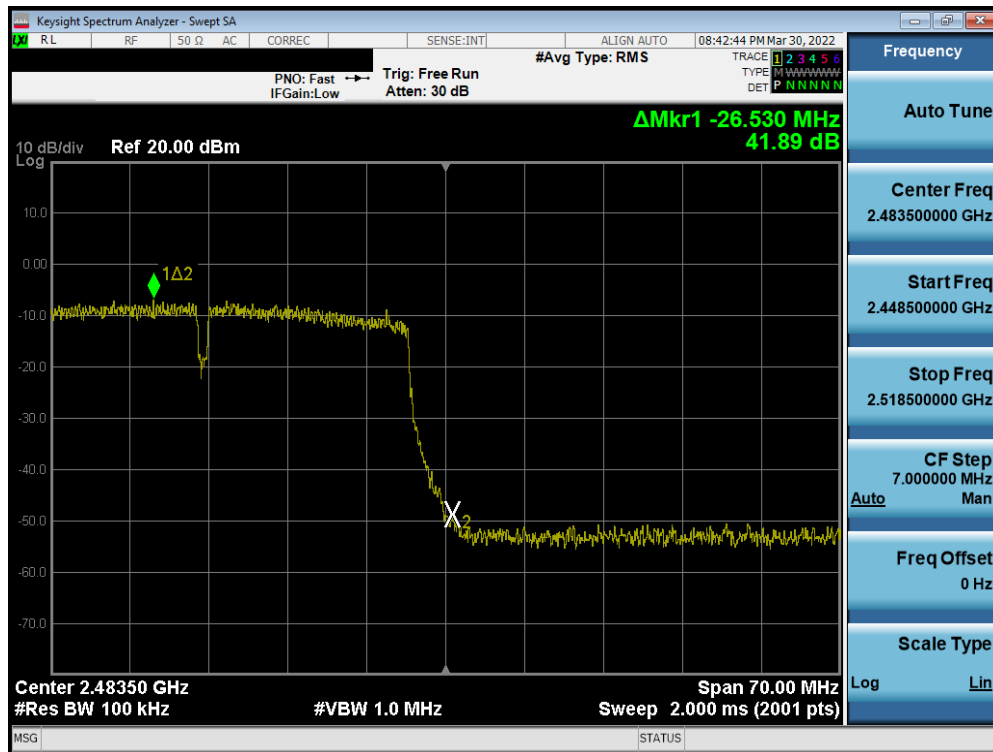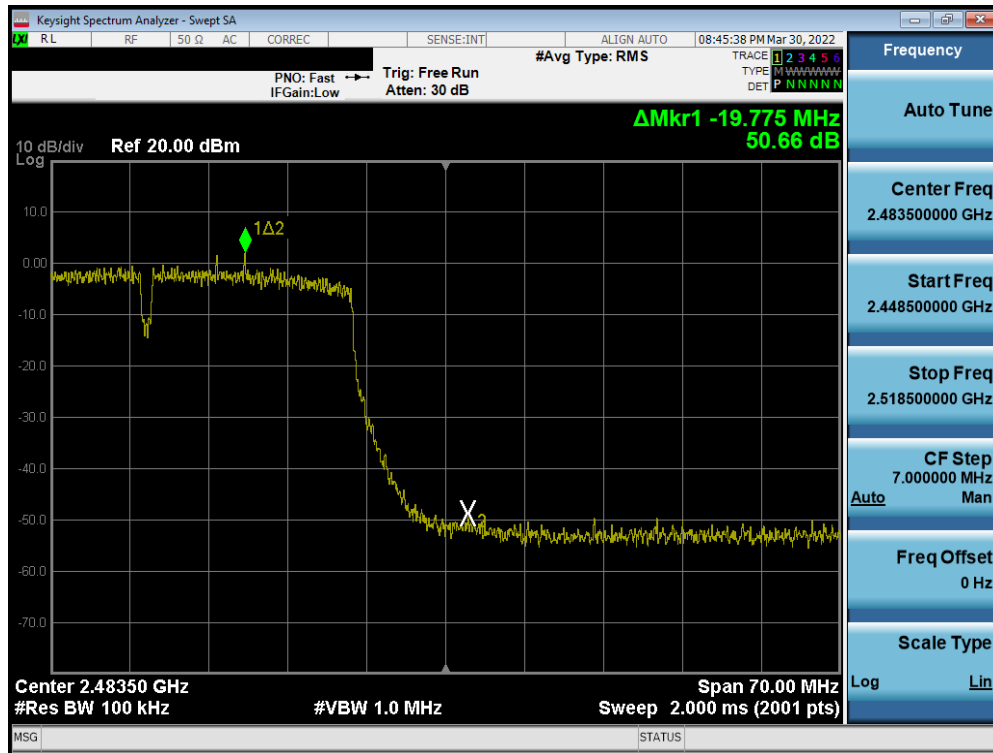

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 83 of 164

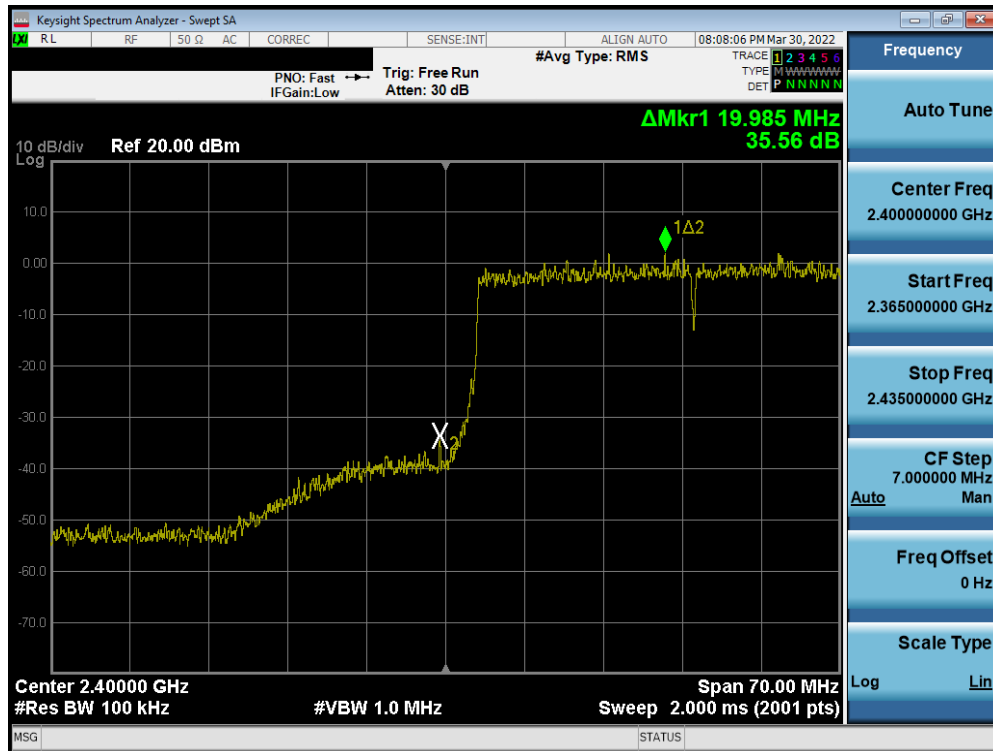


Plot 7-107. Band Edge Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 3)

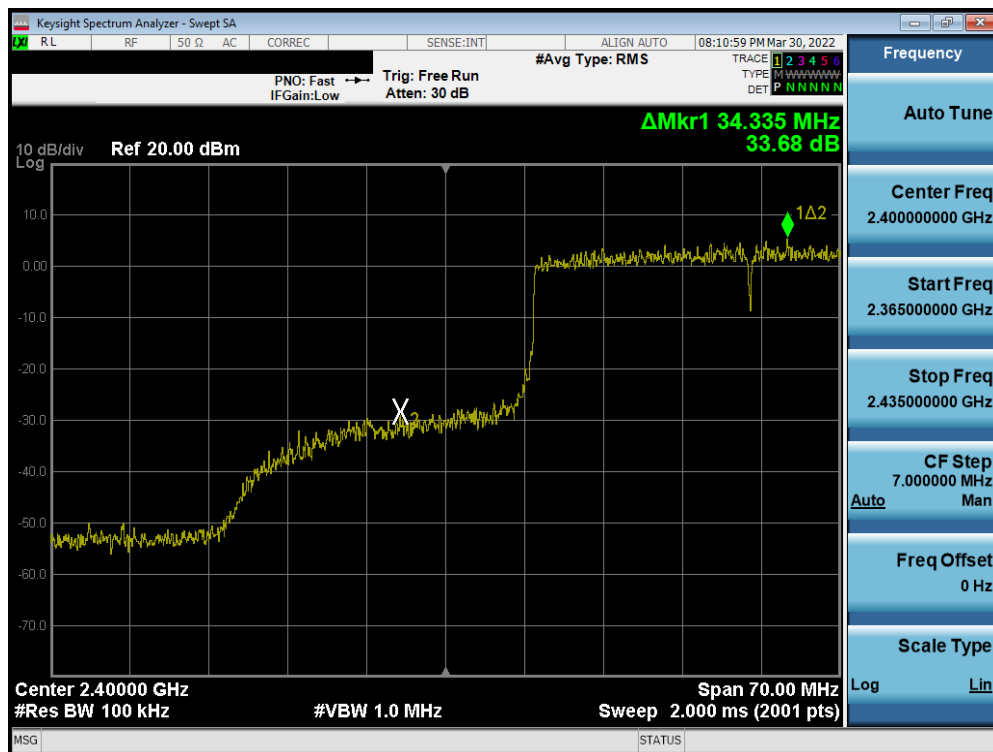


Plot 7-108. Band Edge Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 4)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATON)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 84 of 164

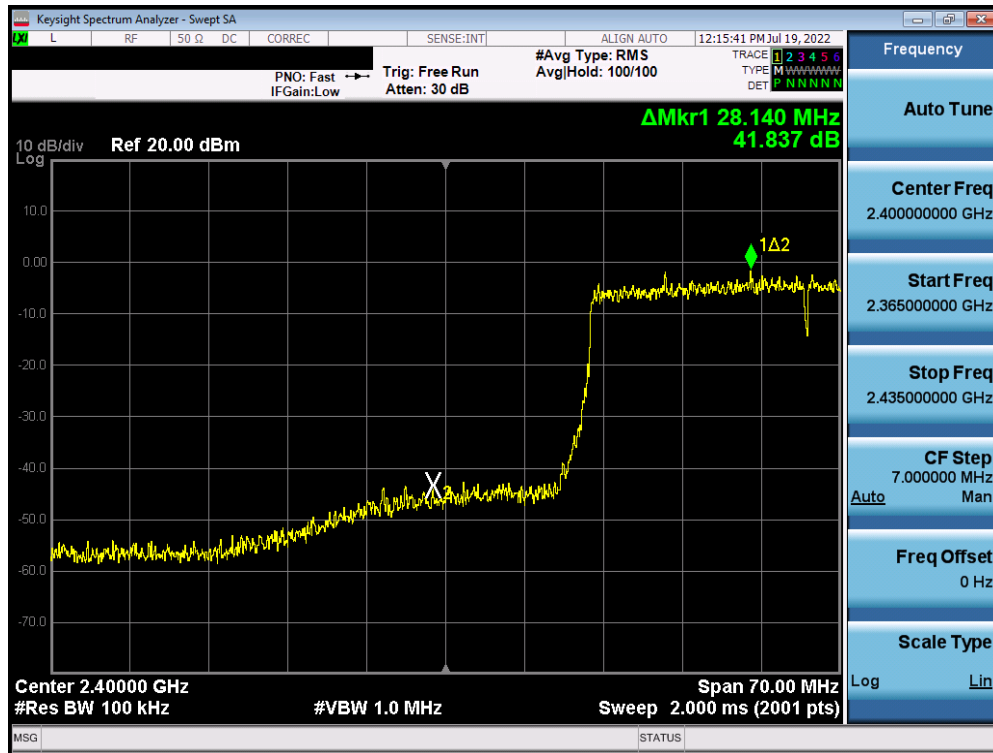

Plot 7-109. Band Edge Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 5)

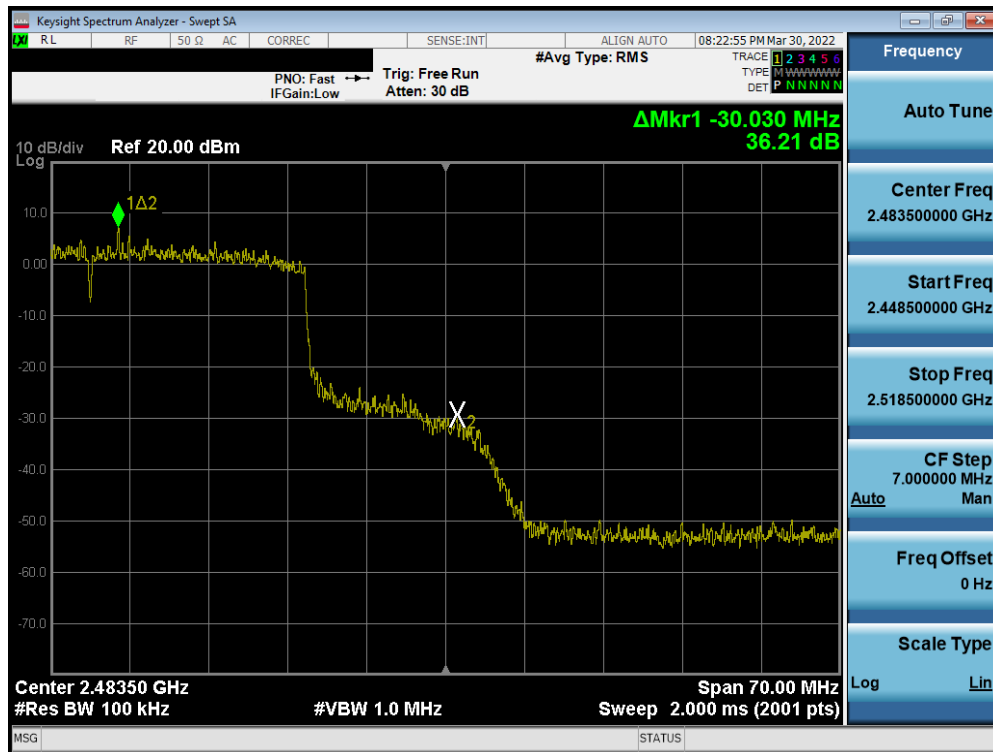

Plot 7-110. Band Edge Plot SISO ANT1 (802.11ax 40MHz (2.4GHz) – Ch. 9)

FCC ID: C3K1997 IC: 3048A-1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-13-R1.C3K	Test Dates: 3/14/2022-7/1/2022	EUT Type: Portable Computing Device	Page 85 of 164