



Plot 7-269. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 183)

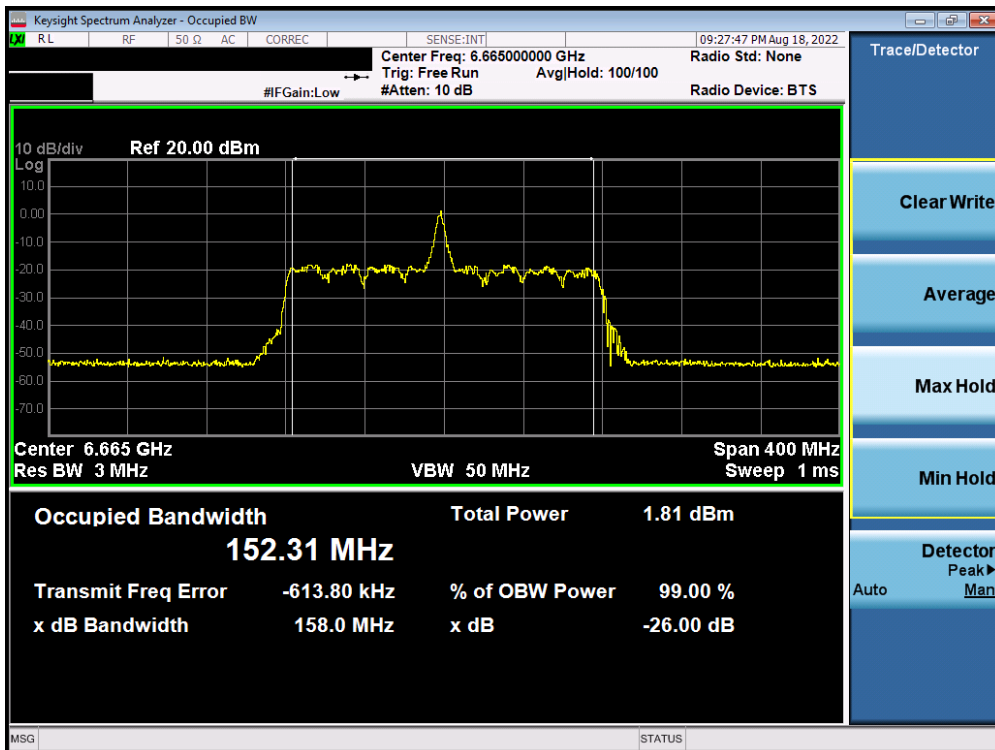


Plot 7-270. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 143)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 151 of 630

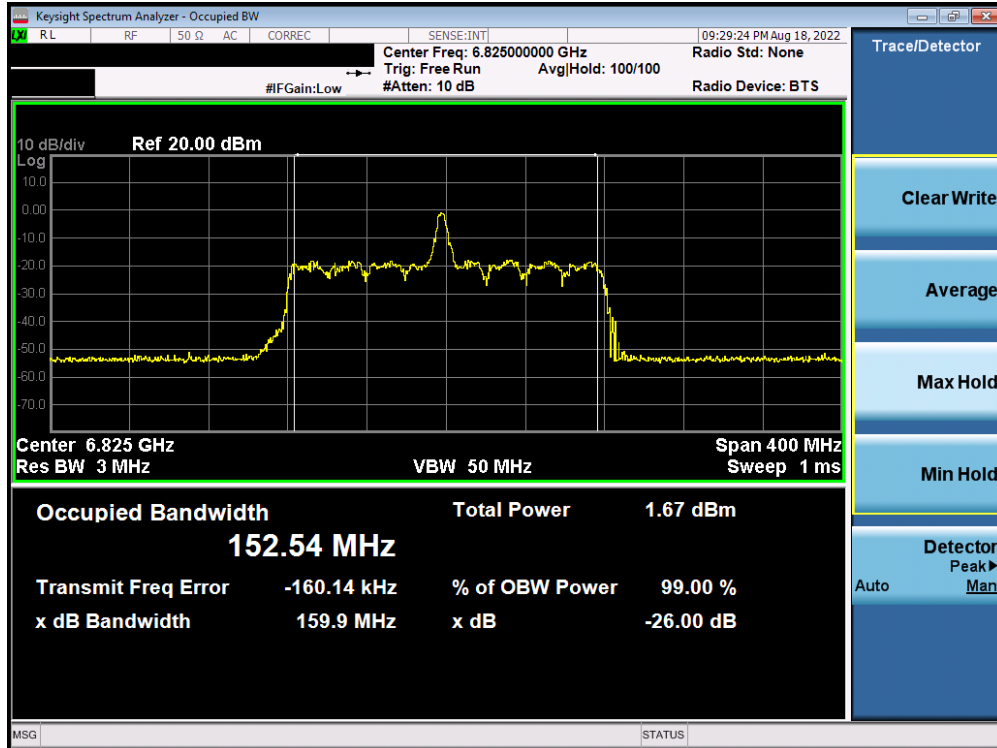


Plot 7-271. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 175)

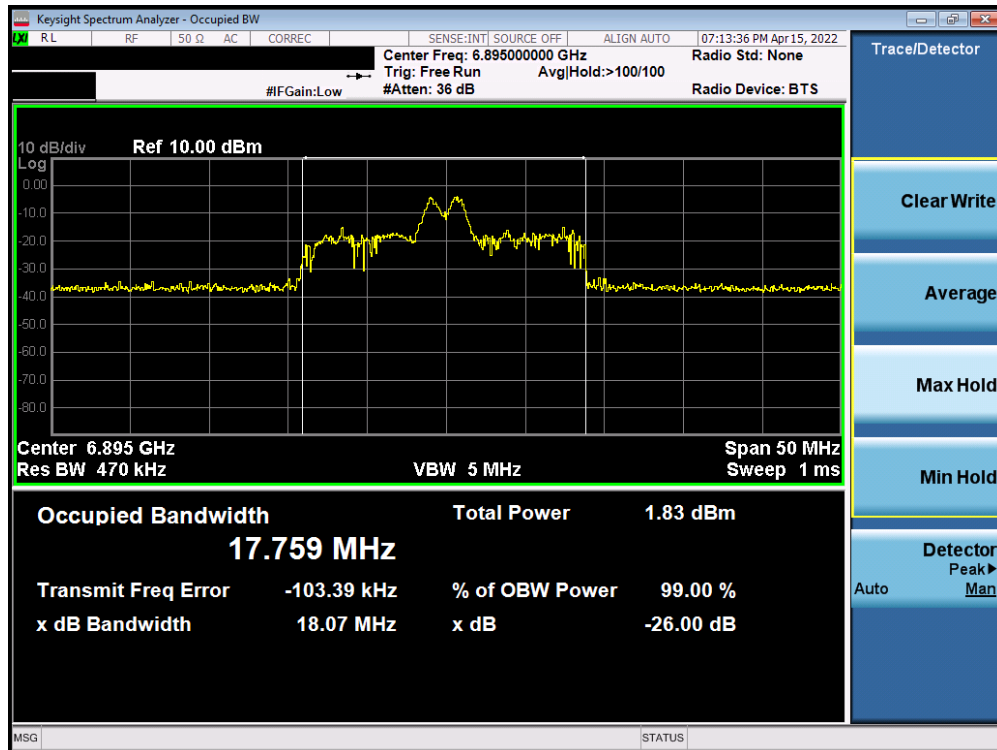


Plot 7-272. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 189)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 152 of 630

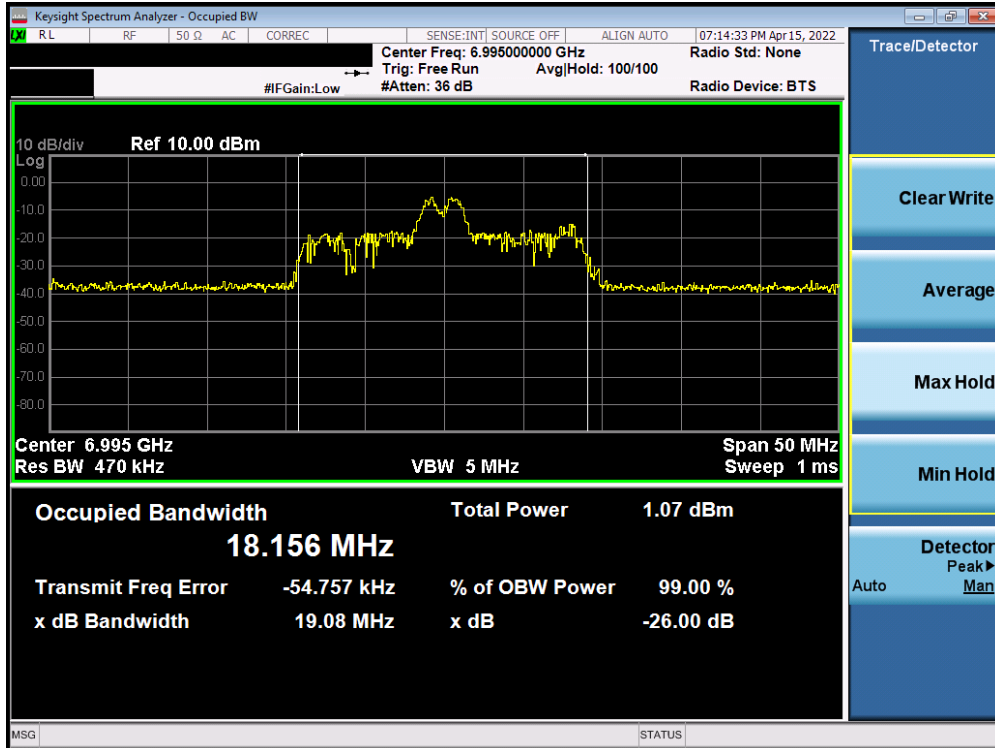


Plot 7-273. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 209)

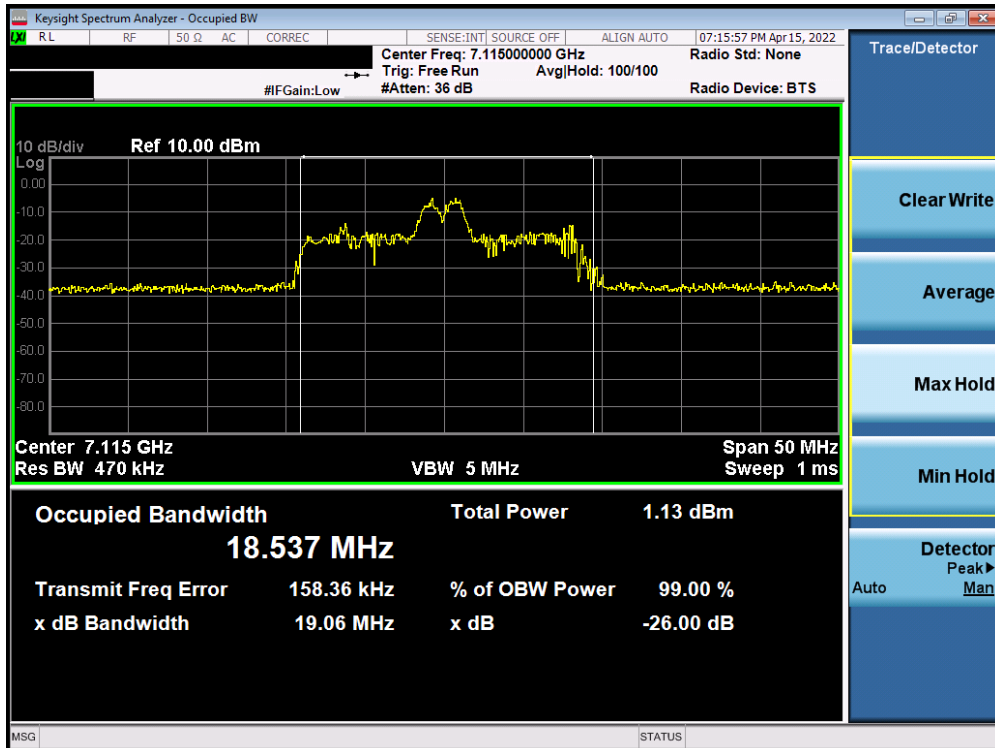


Plot 7-274. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 233)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 153 of 630

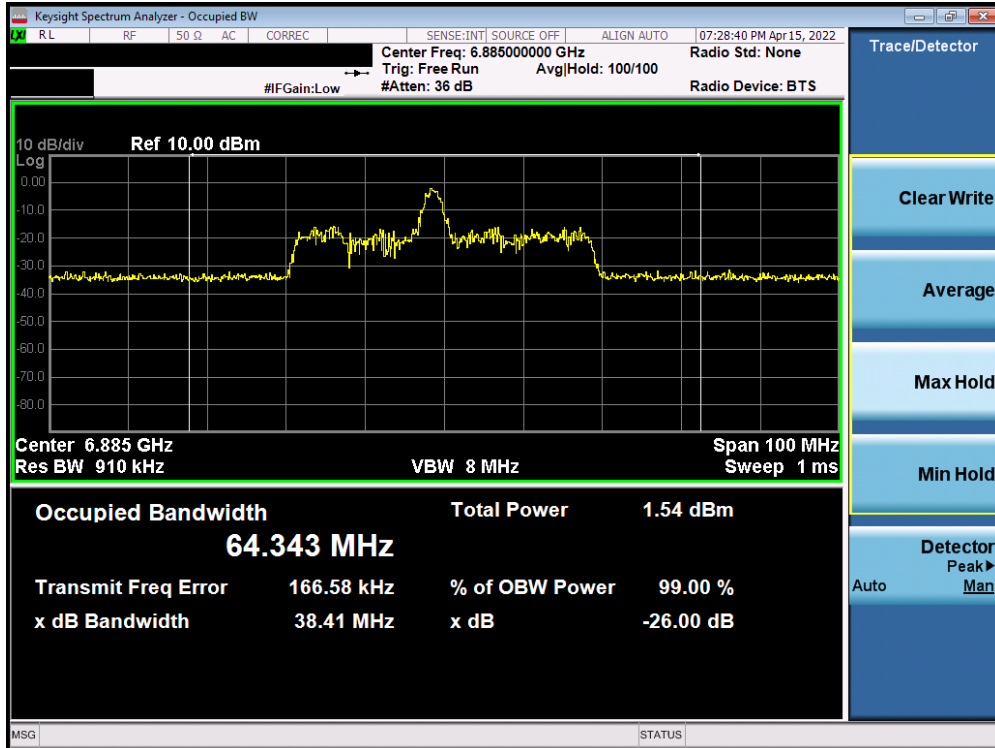


Plot 7-275. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 187)

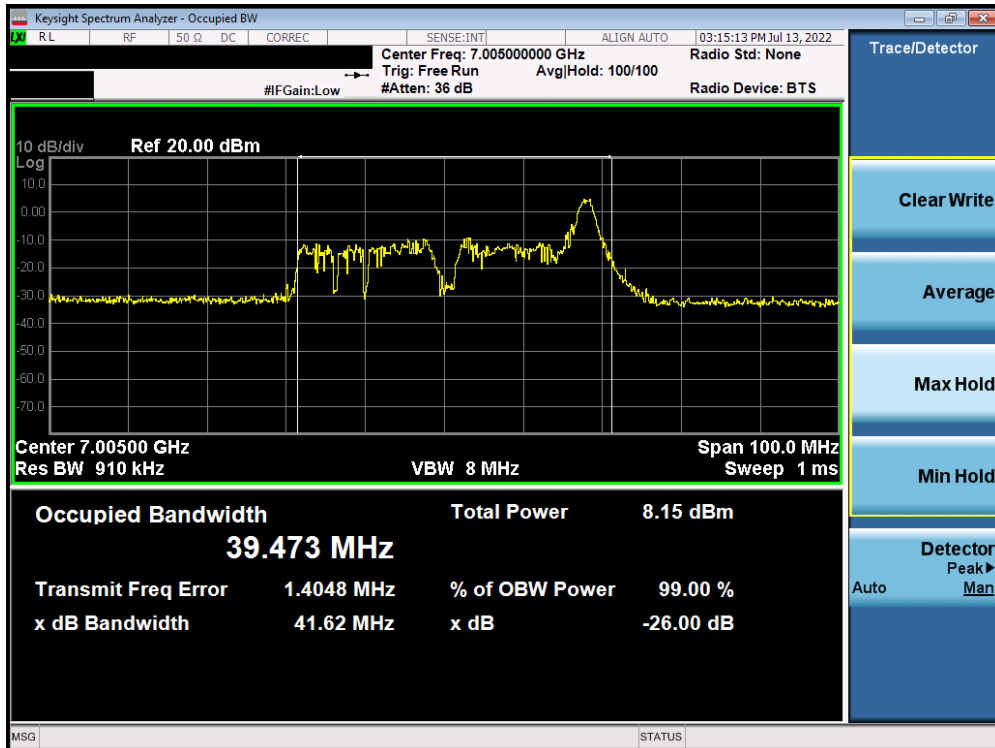


Plot 7-276. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 211)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 154 of 630

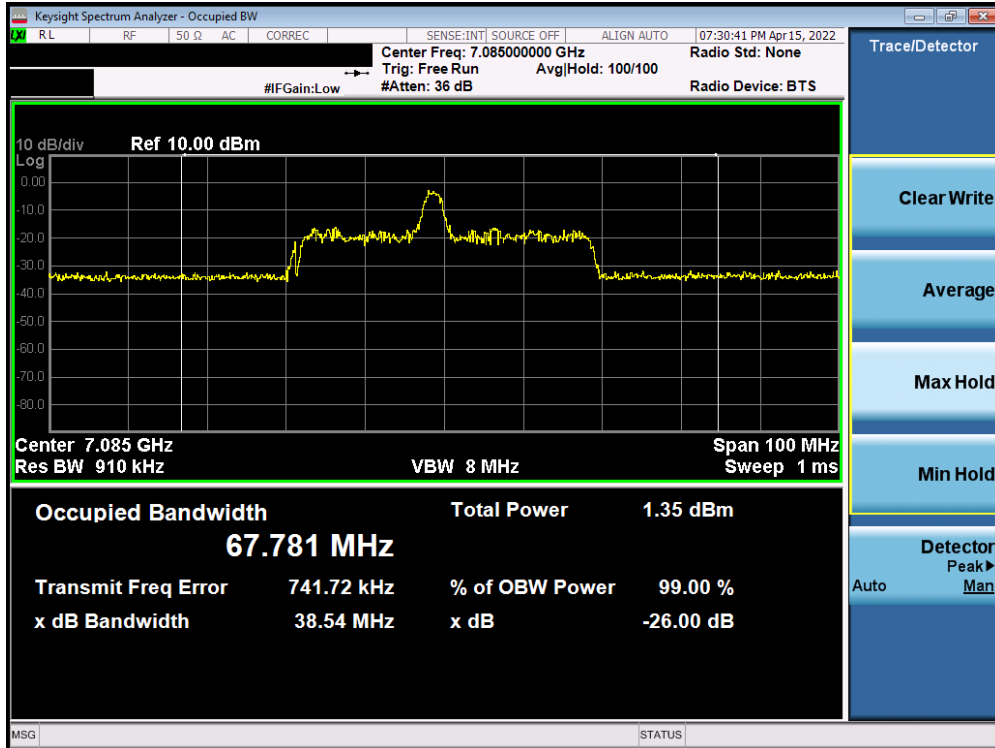


Plot 7-277. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 227)

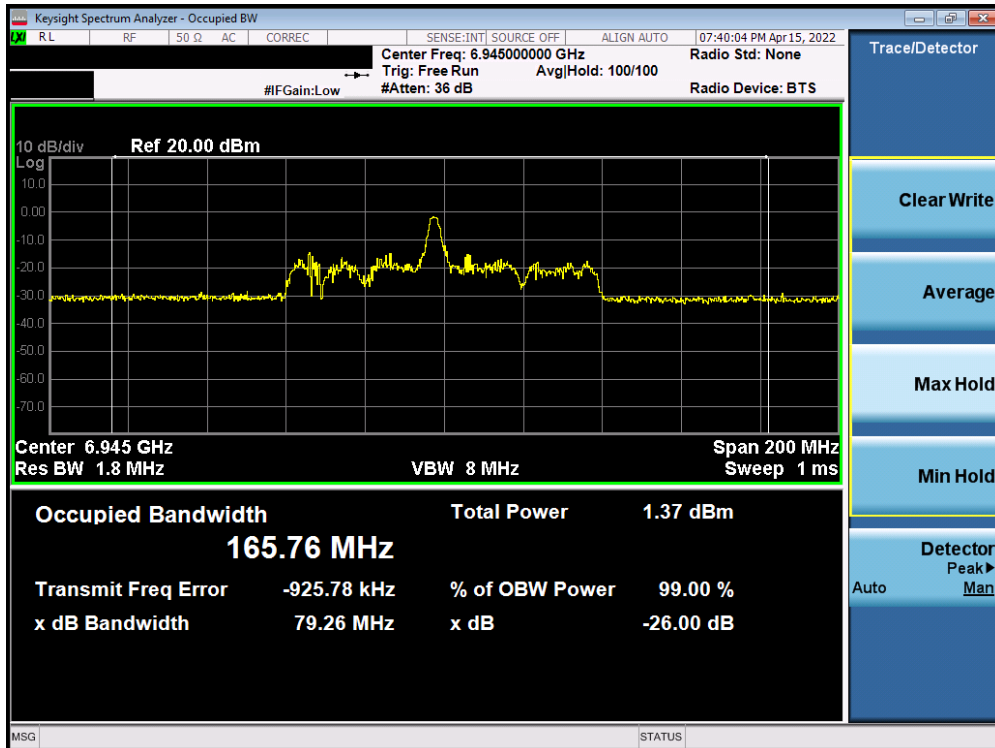


Plot 7-278. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 199)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 155 of 630

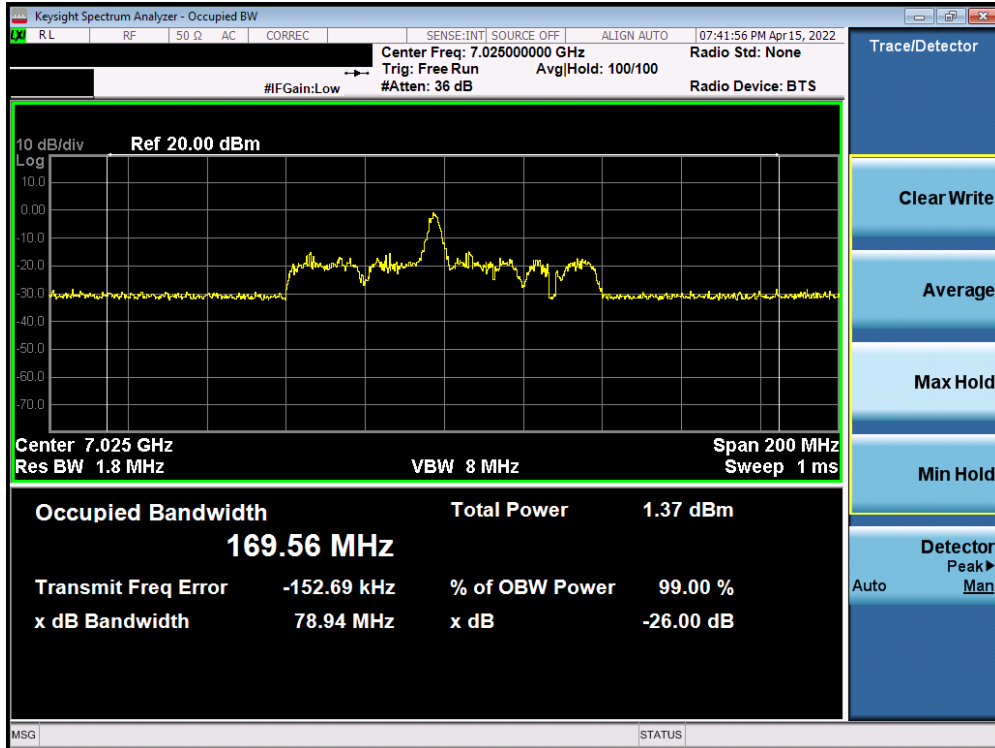


Plot 7-279. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 215)

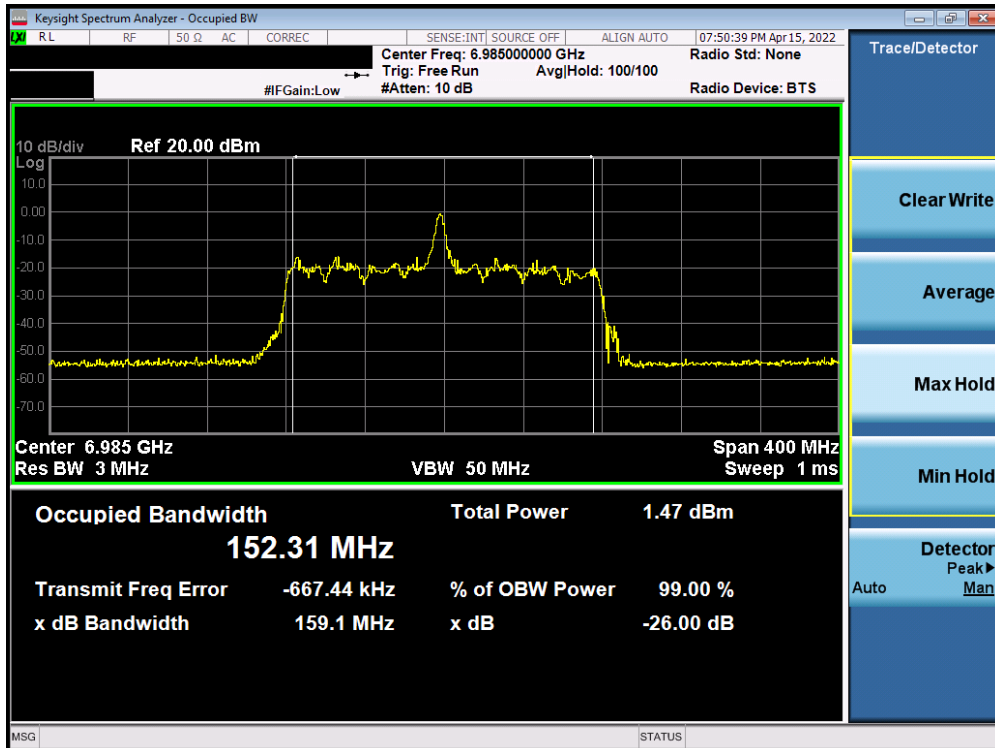


Plot 7-280. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 207)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 156 of 630

MIMO Antenna-2 Occupied Bandwidth Measurements (Full Tones)

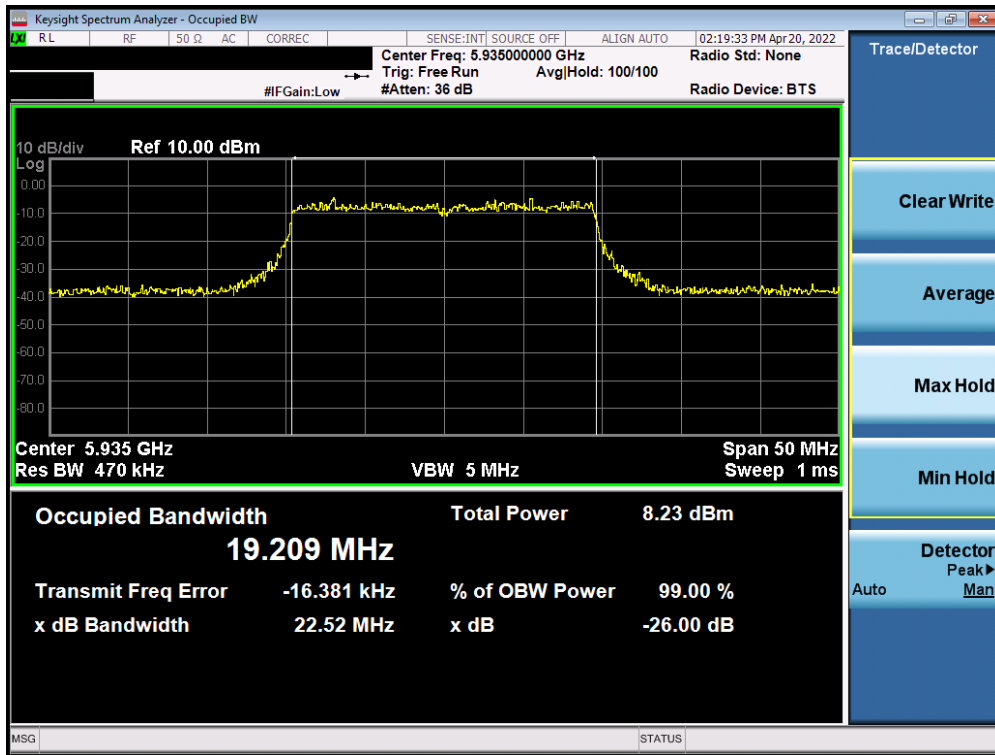


Plot 7-281. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) UNII Band 5) – Ch. 2

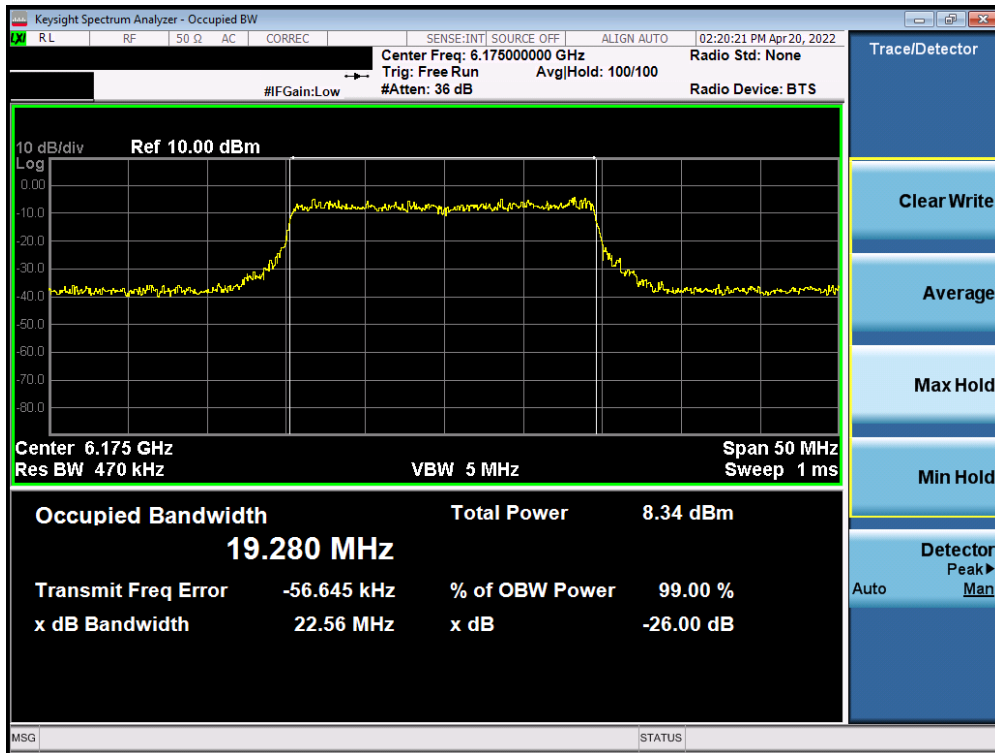


Plot 7-282. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 45)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 157 of 630

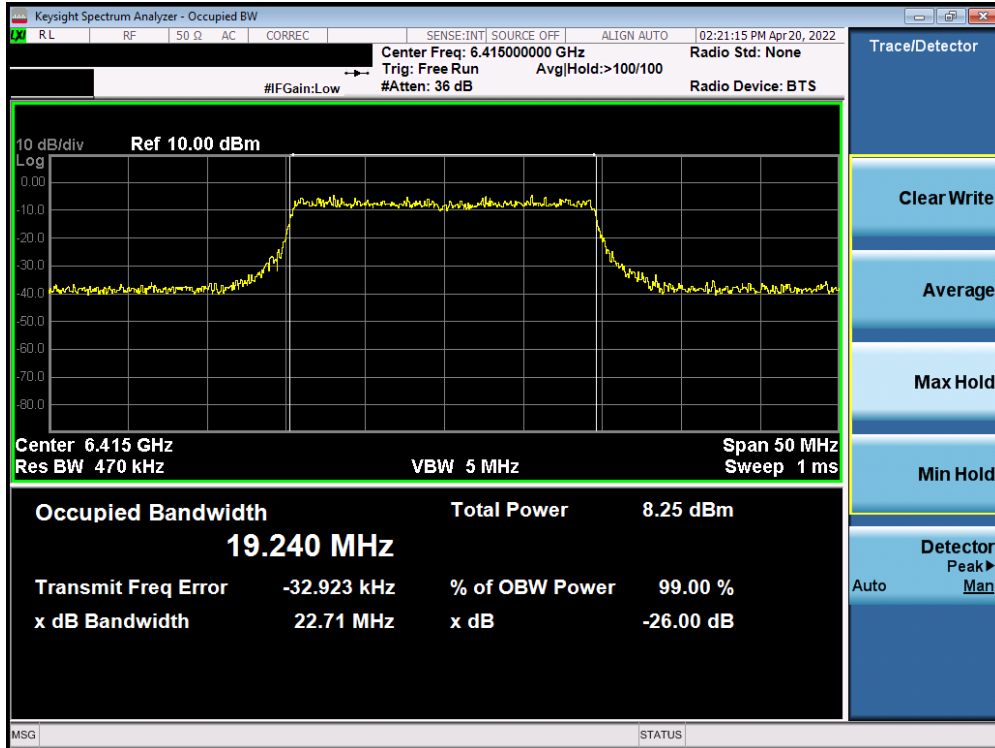


Plot 7-283. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) UNII Band 5) – Ch. 93)

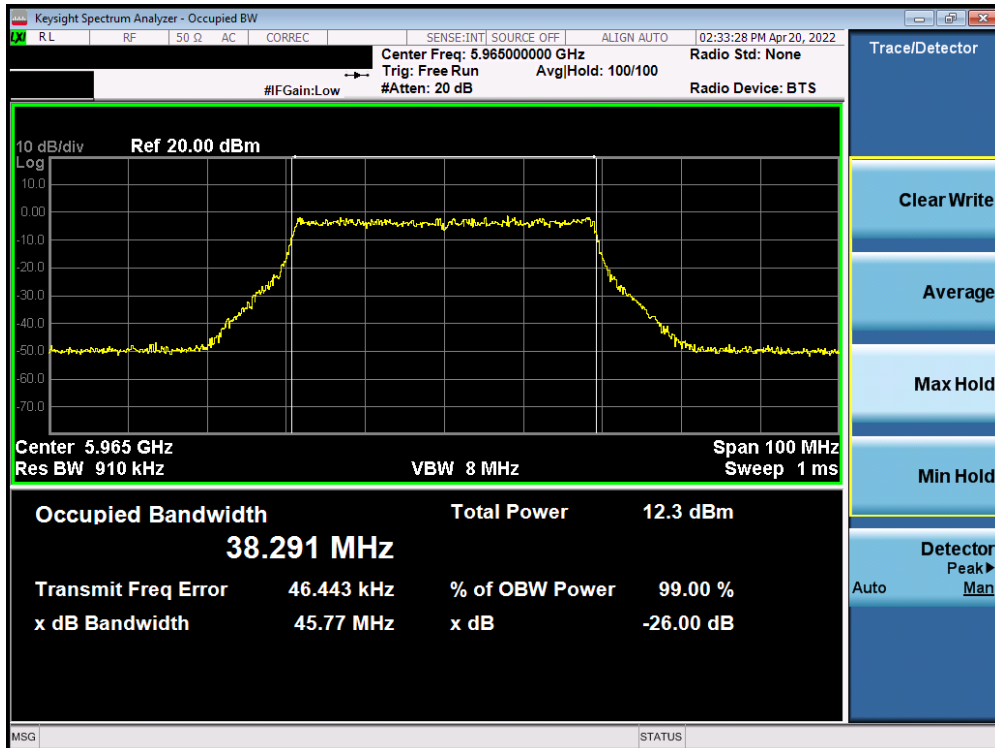


Plot 7-284. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 3)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 158 of 630

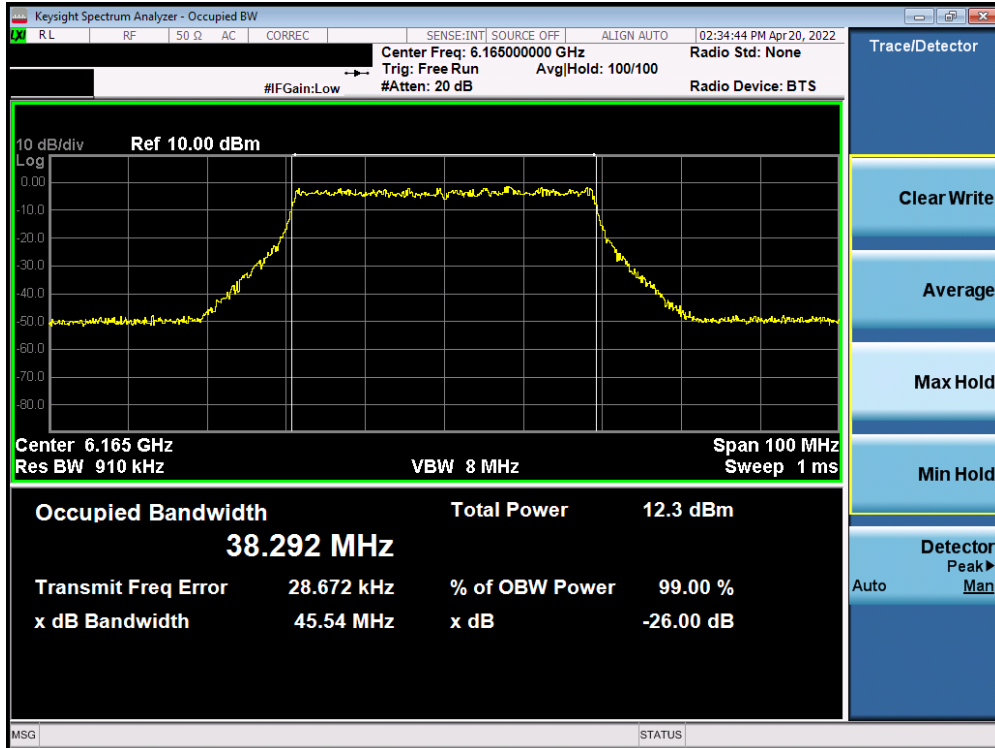


Plot 7-285. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 43)

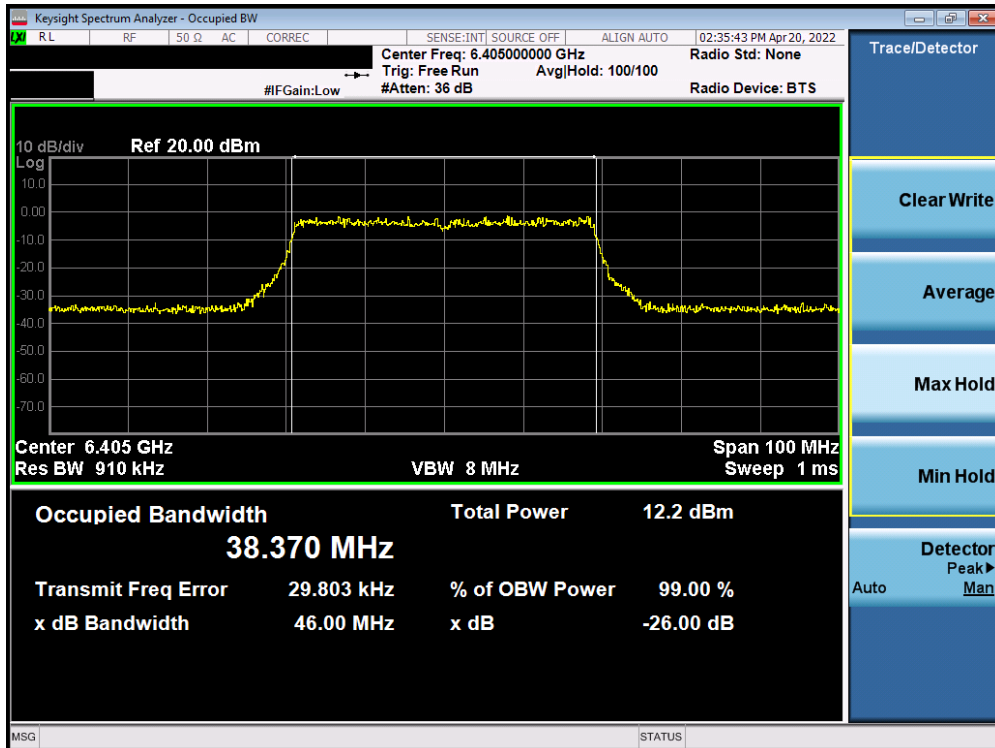


Plot 7-286. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 91)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 159 of 630

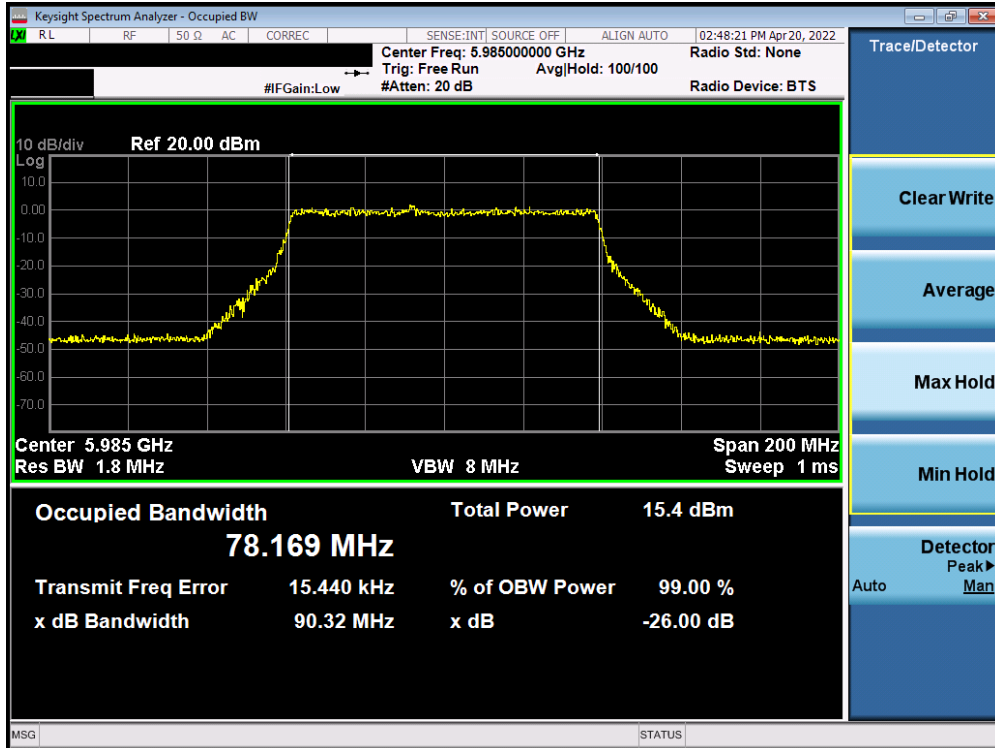


Plot 7-287. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 7)

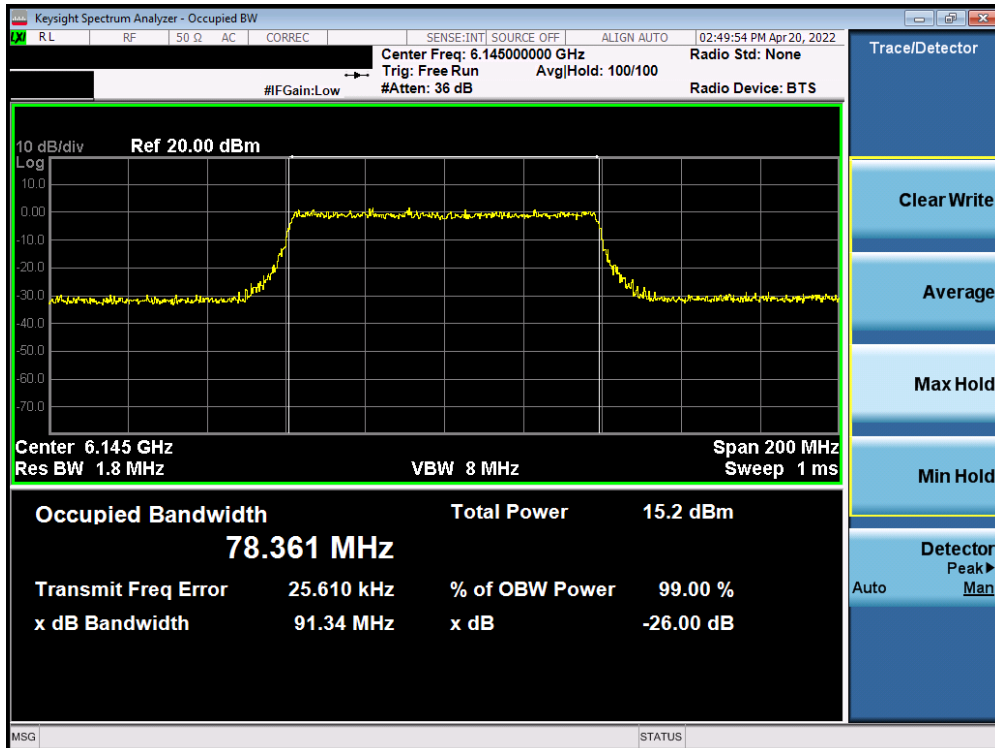


Plot 7-288. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 39)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 160 of 630

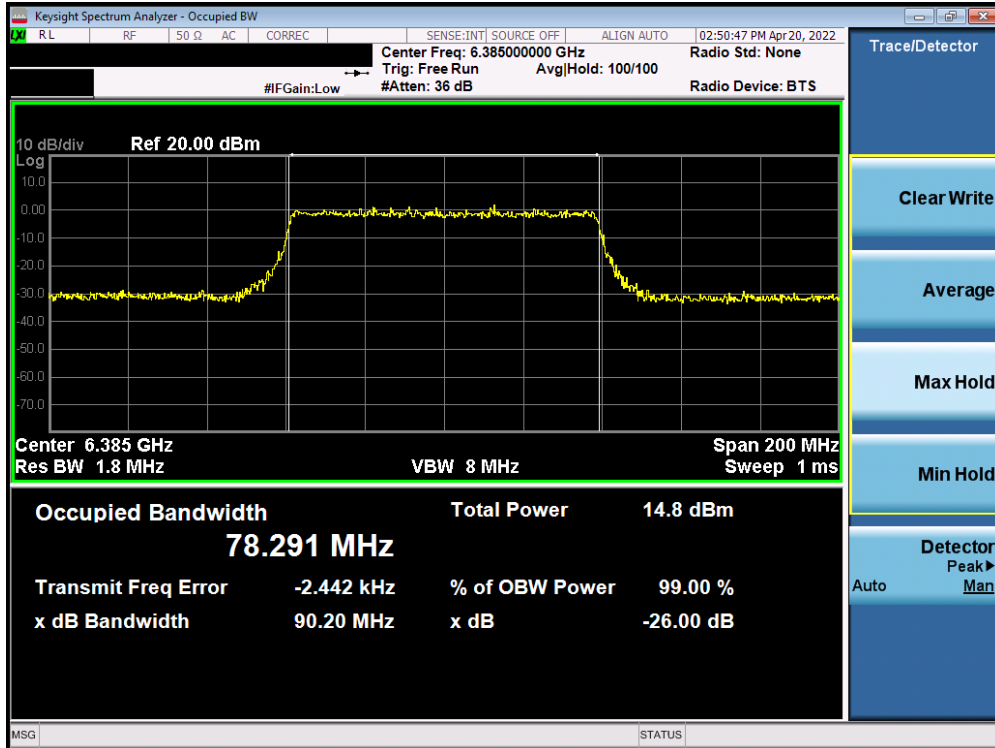


Plot 7-289. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 5) – Ch. 87)

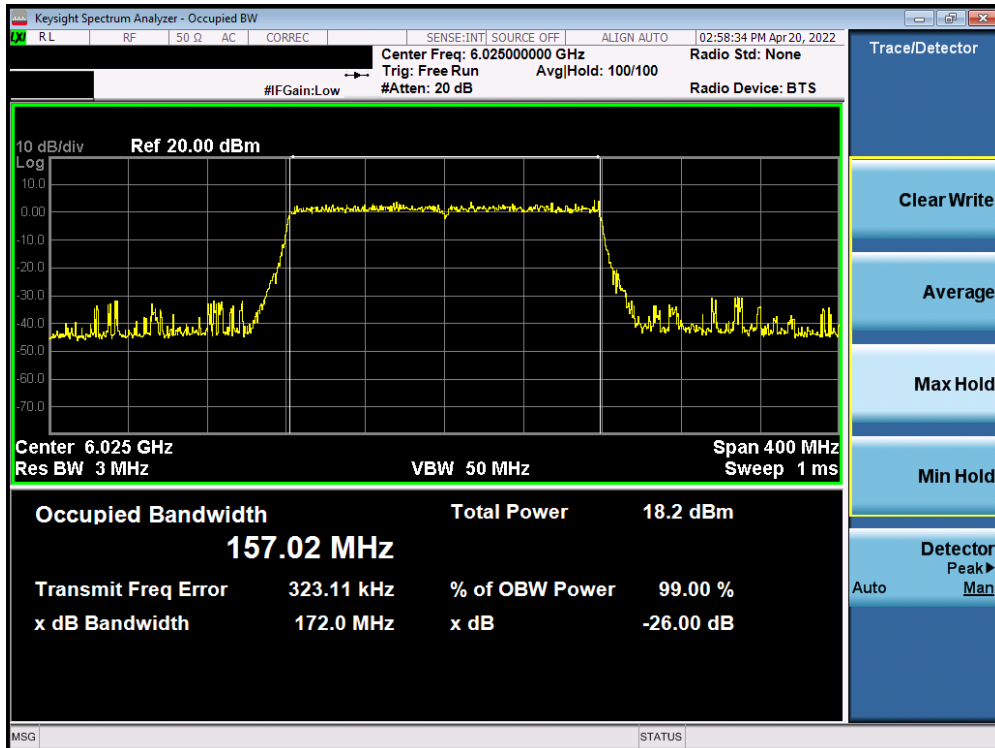


Plot 7-290. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 1602.11ax (Full Tone) (UNII Band 5) – Ch. 15)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 161 of 630

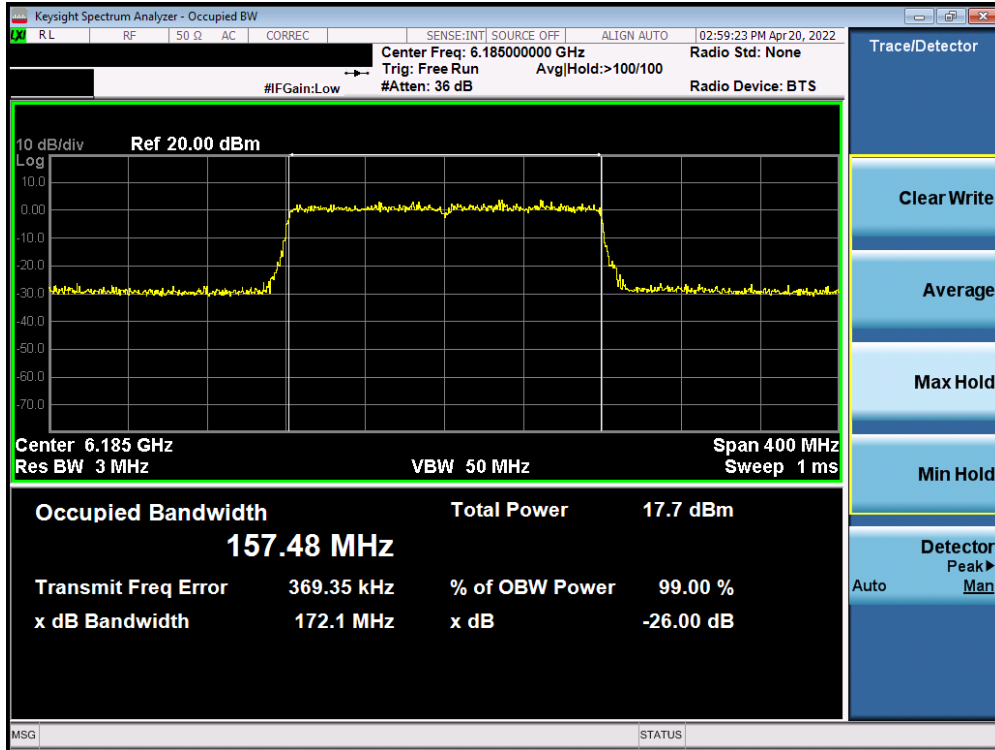


Plot 7-291. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 1602.11ax (Full Tone) (UNII Band 5) – Ch. 47)

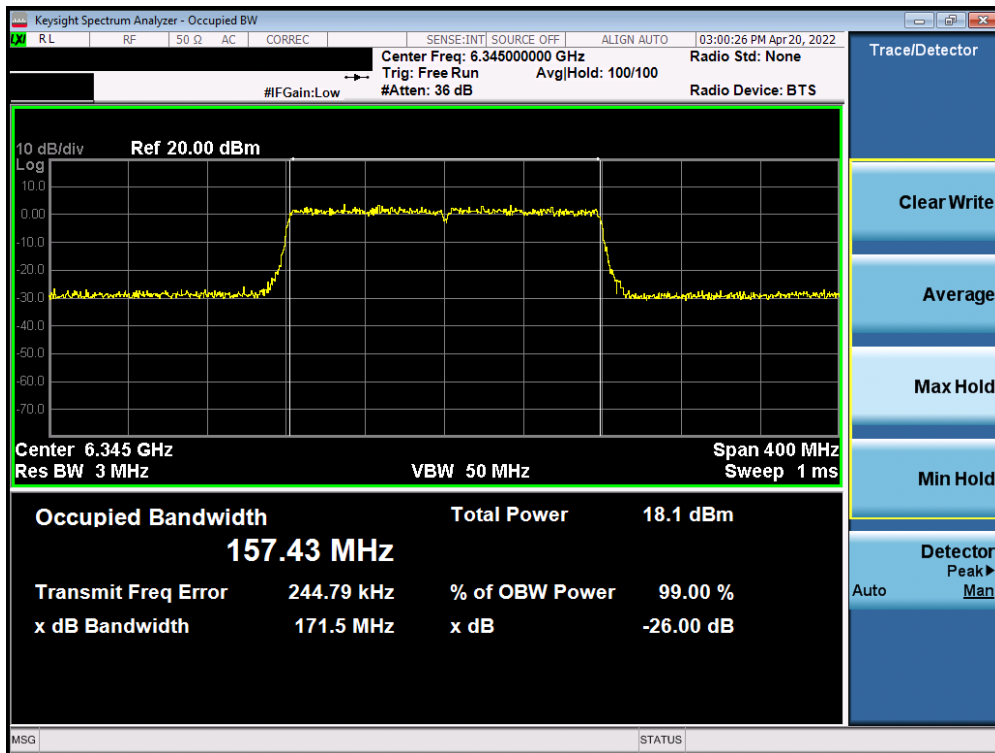


Plot 7-292. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 1602.11ax (Full Tone) (UNII Band 5) – Ch. 79)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 162 of 630

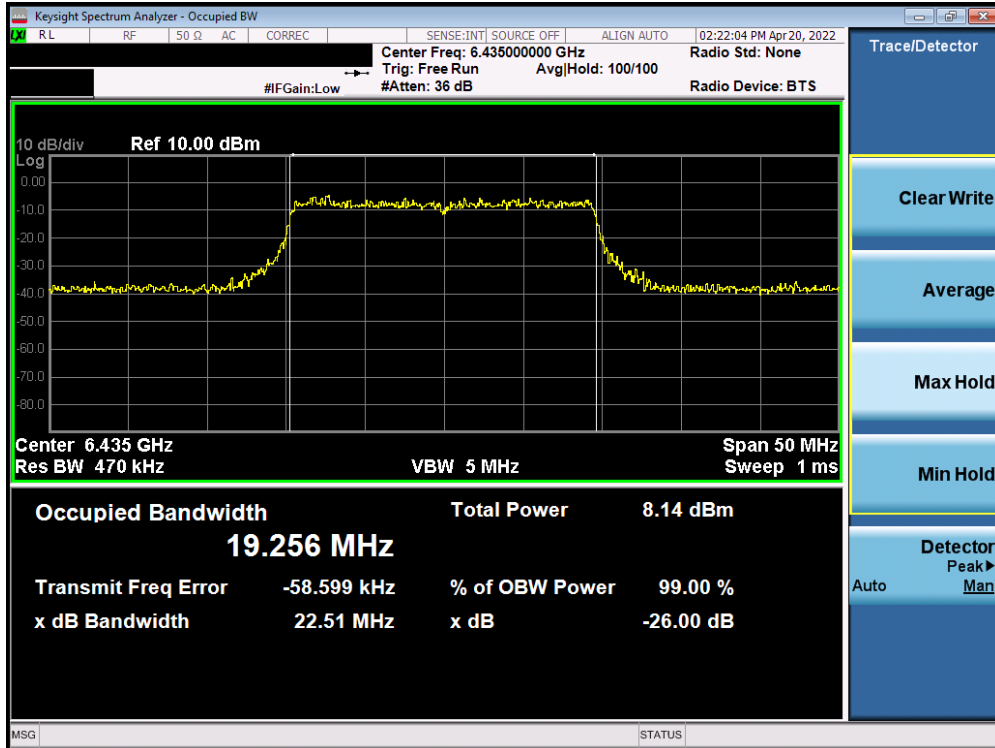


Plot 7-293. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 97)

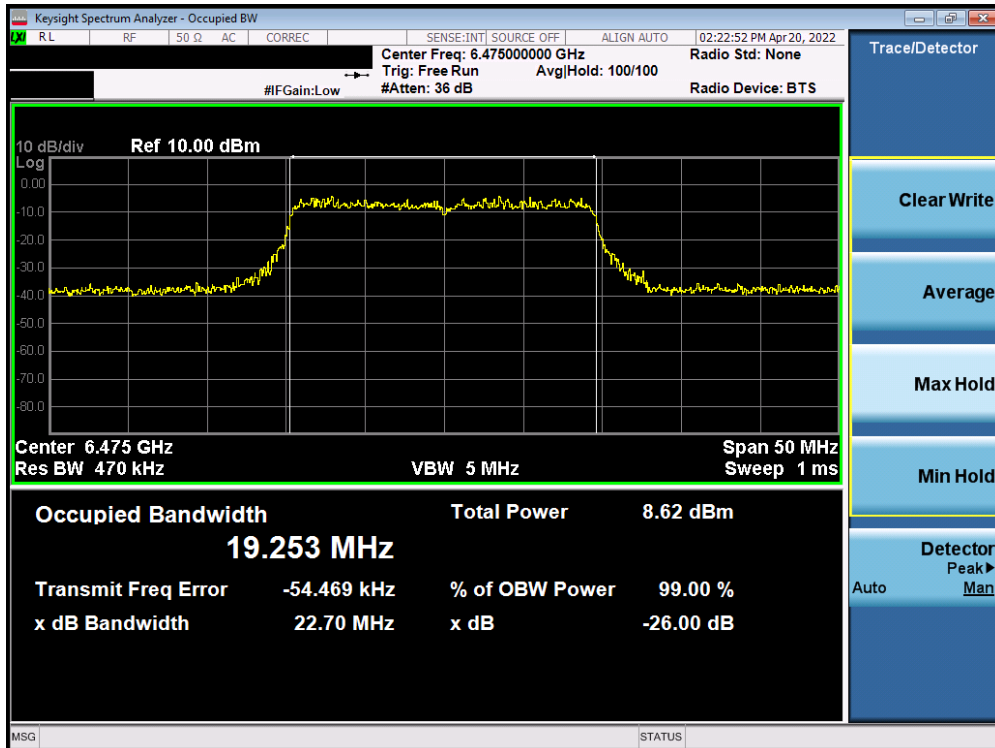


Plot 7-294. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 105)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 163 of 630

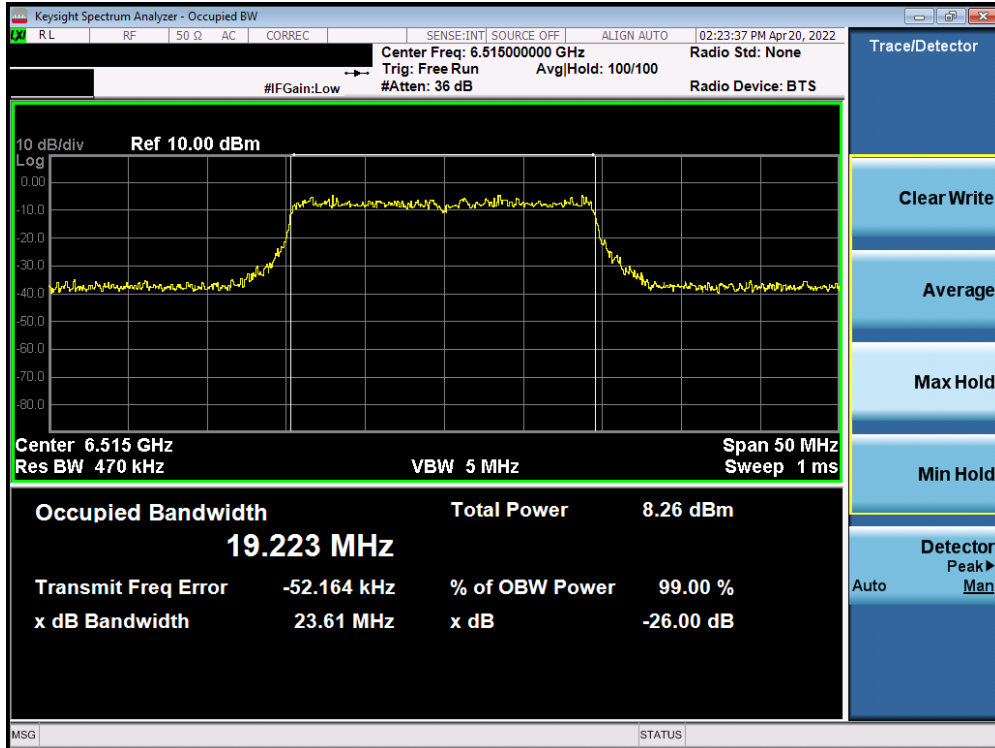


Plot 7-295. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 113)

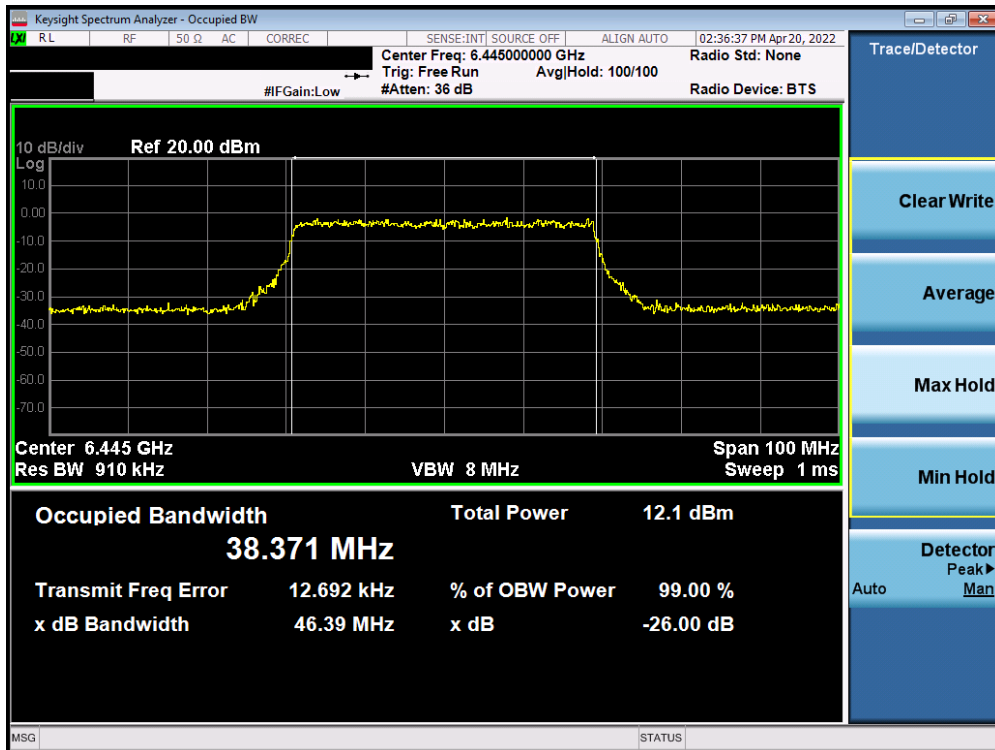


Plot 7-296. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 99)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 164 of 630

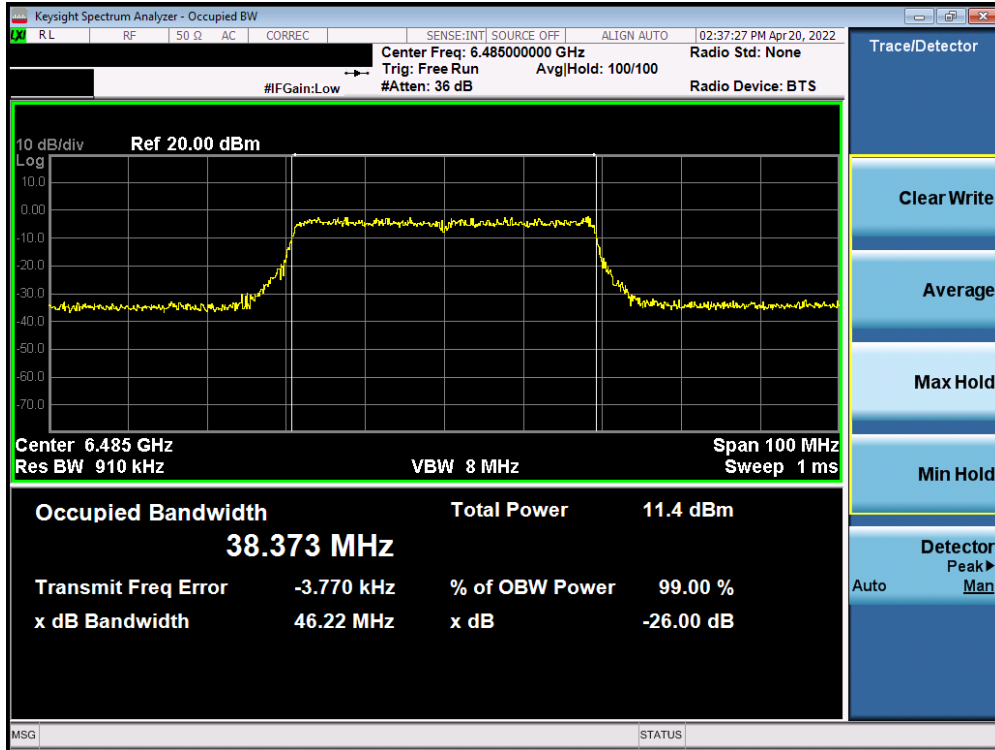


Plot 7-297. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 107)

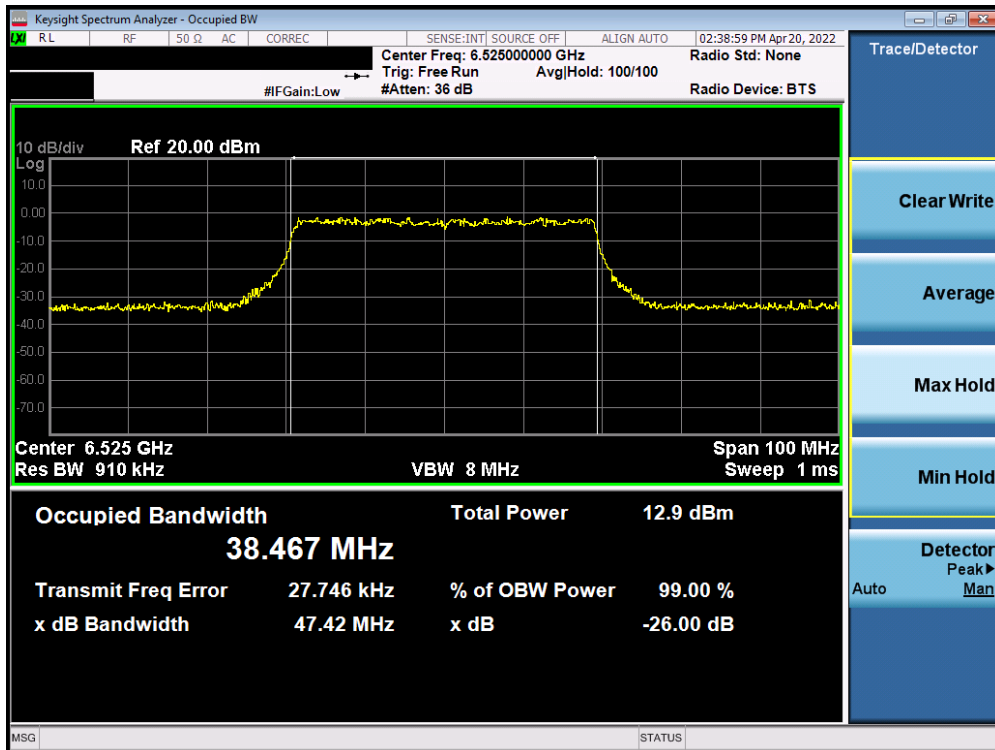


Plot 7-298. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 115)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 165 of 630

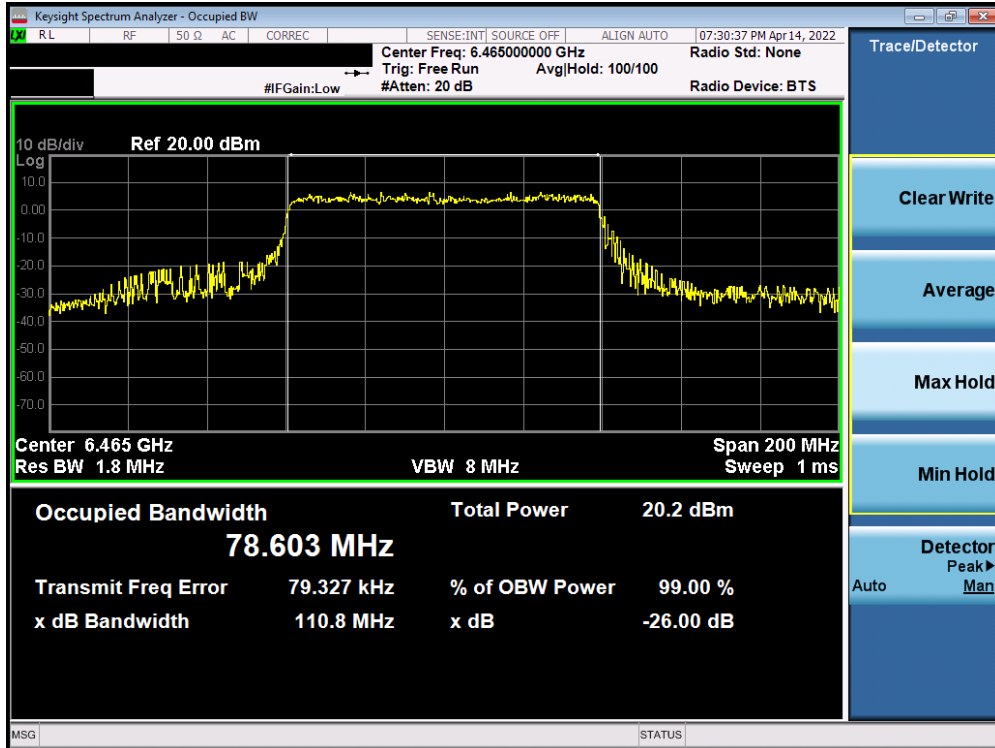


Plot 7-299. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 103)

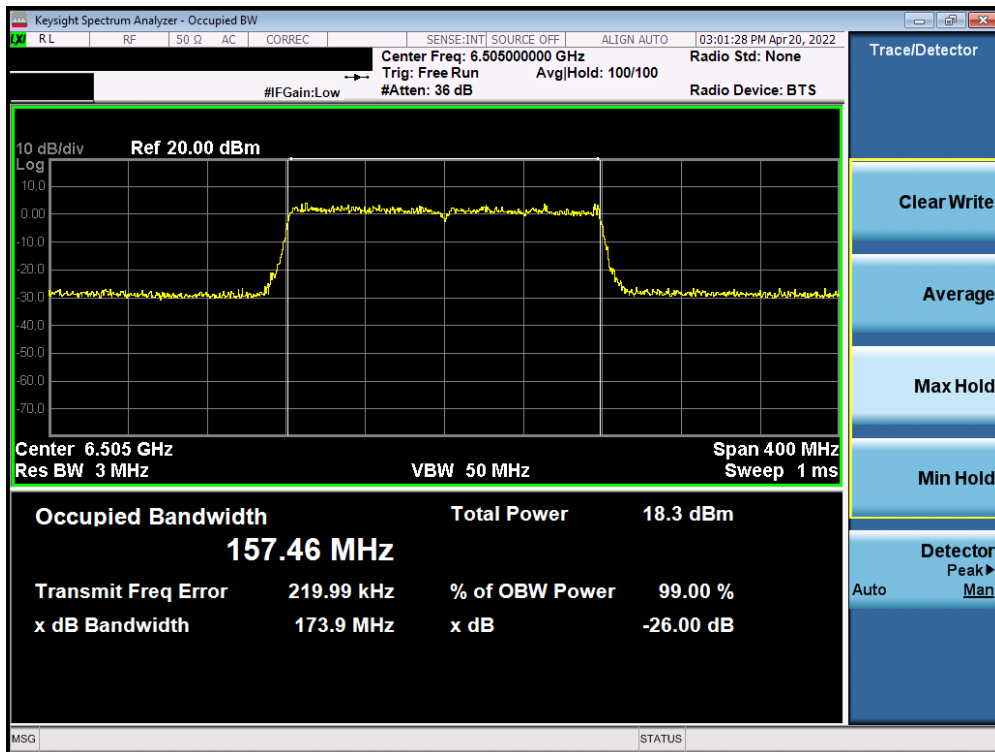


Plot 7-300. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 6) – Ch. 111)

FCC ID: C3K1997		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device		Page 166 of 630

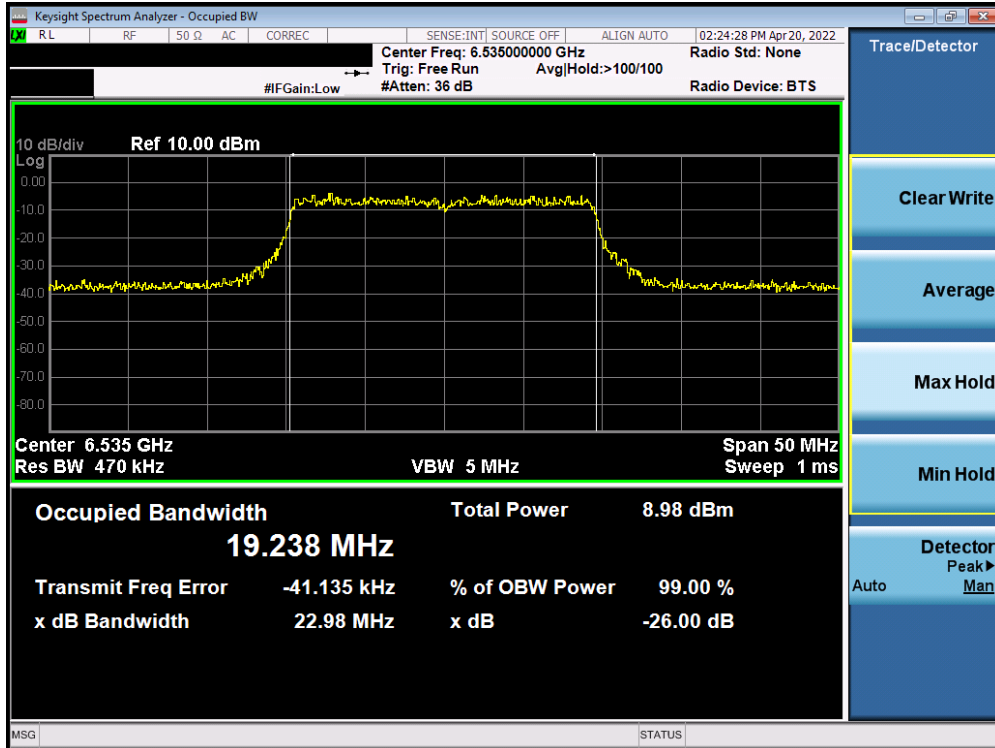


Plot 7-301. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 117)

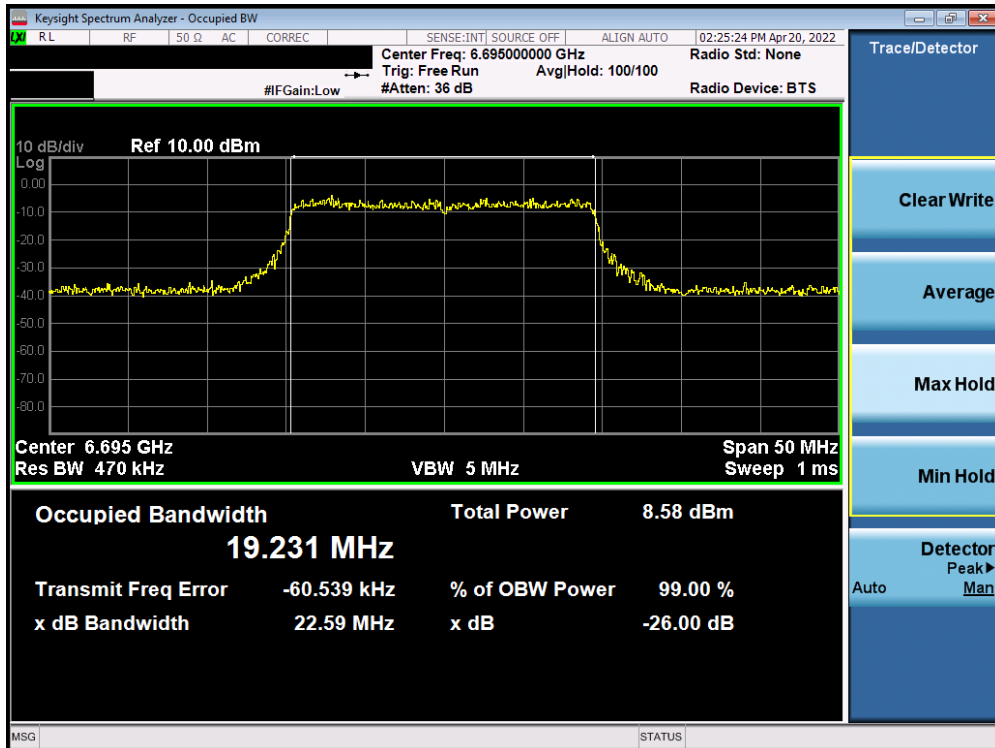


Plot 7-302. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 149)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 167 of 630

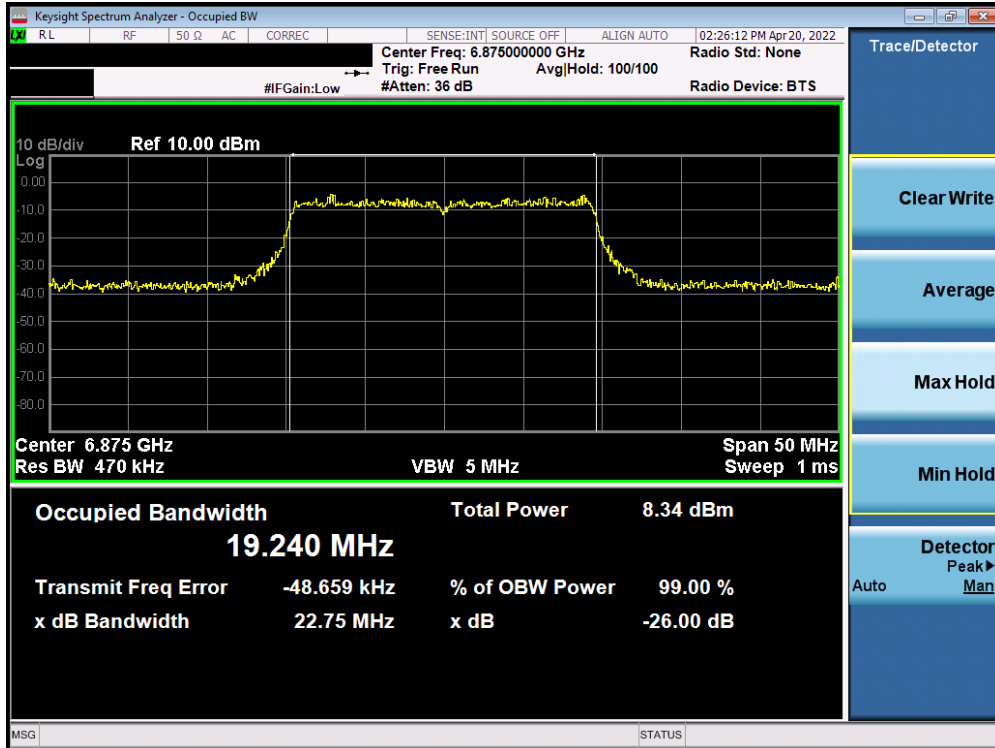


Plot 7-303. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 185)

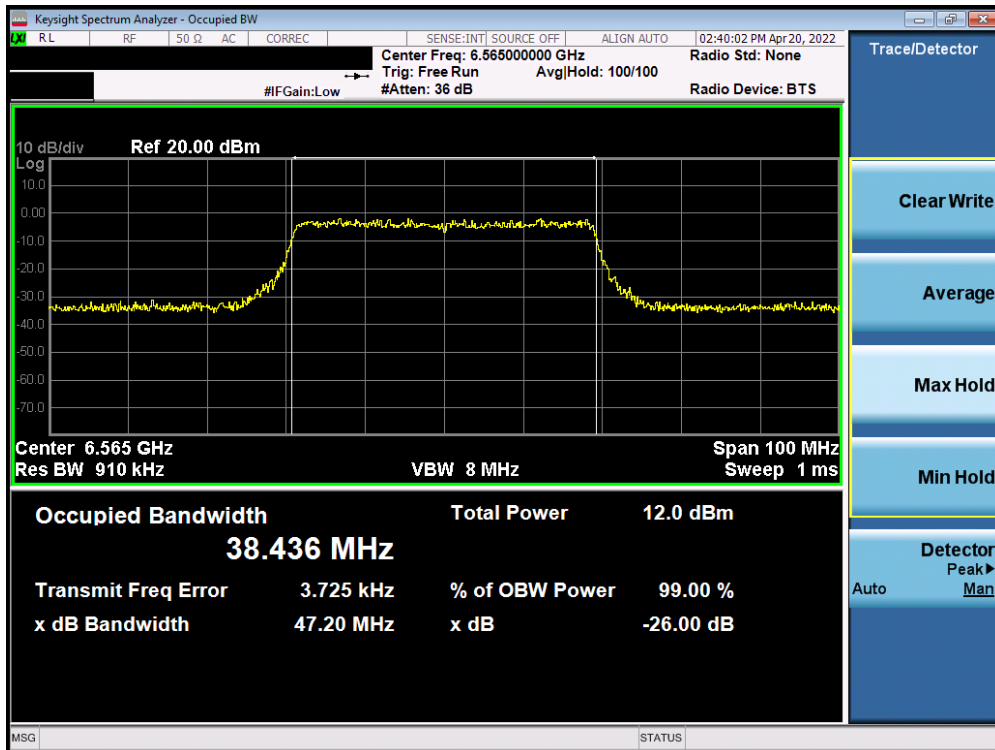


Plot 7-304. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 123)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 168 of 630

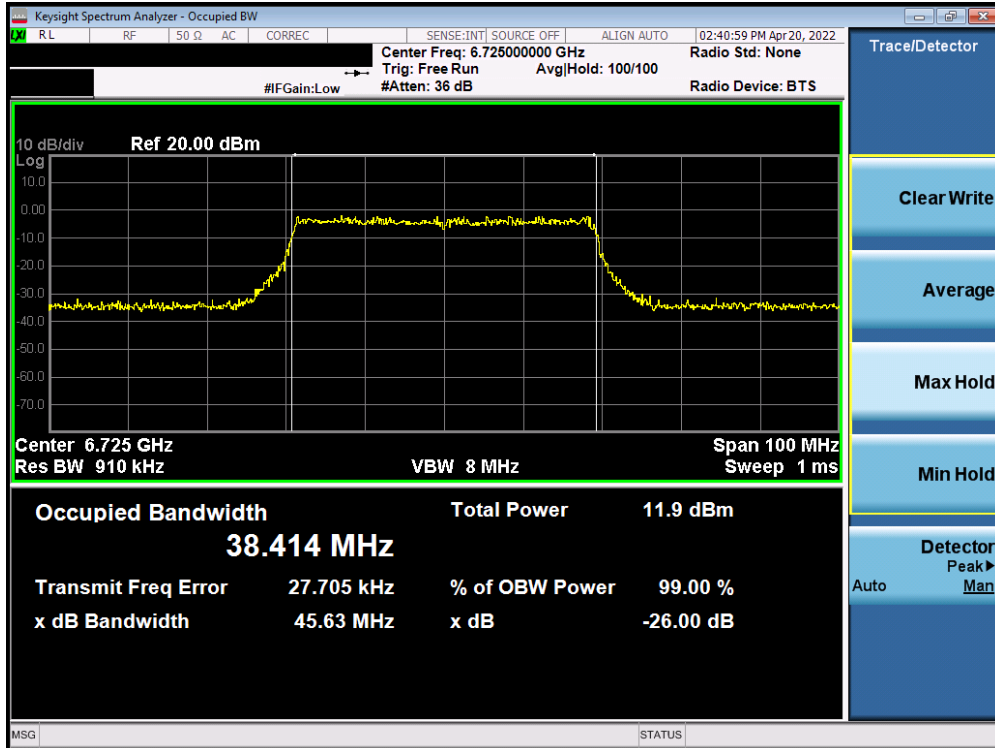


Plot 7-305. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 155)

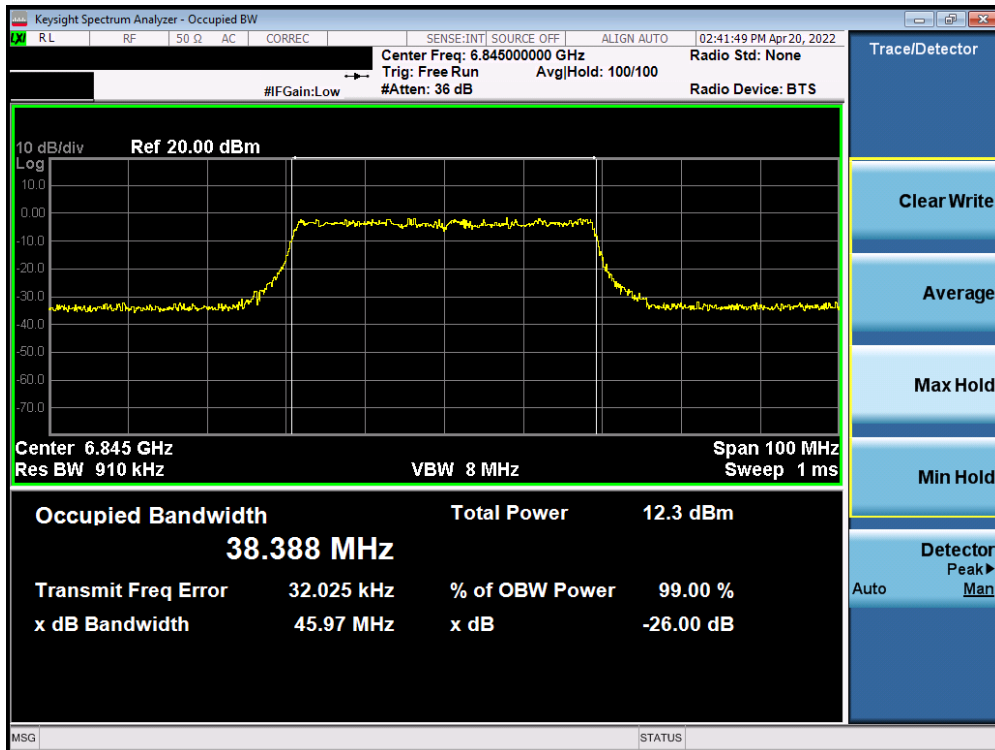


Plot 7-306. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 179)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 169 of 630

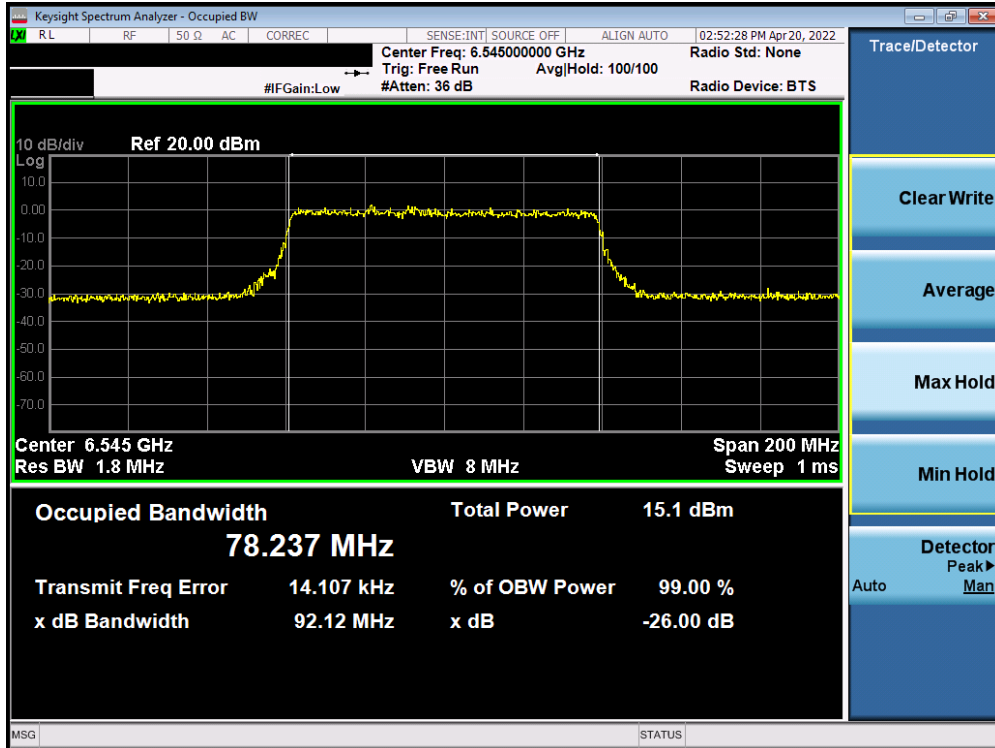


Plot 7-307. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 119)

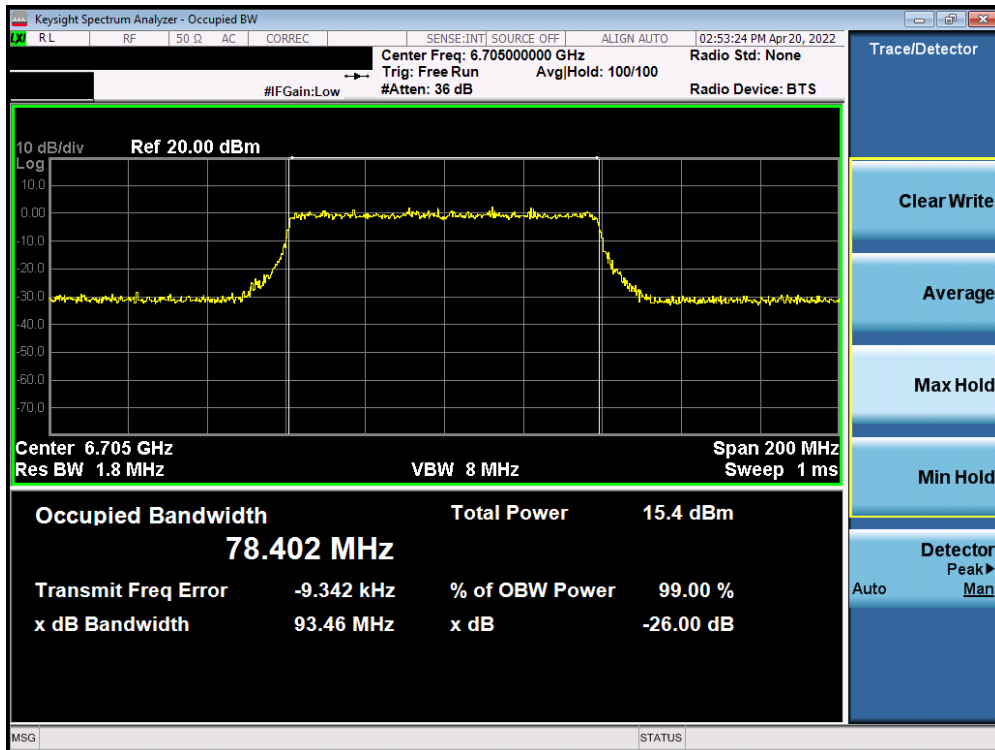


Plot 7-308. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 151)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 170 of 630

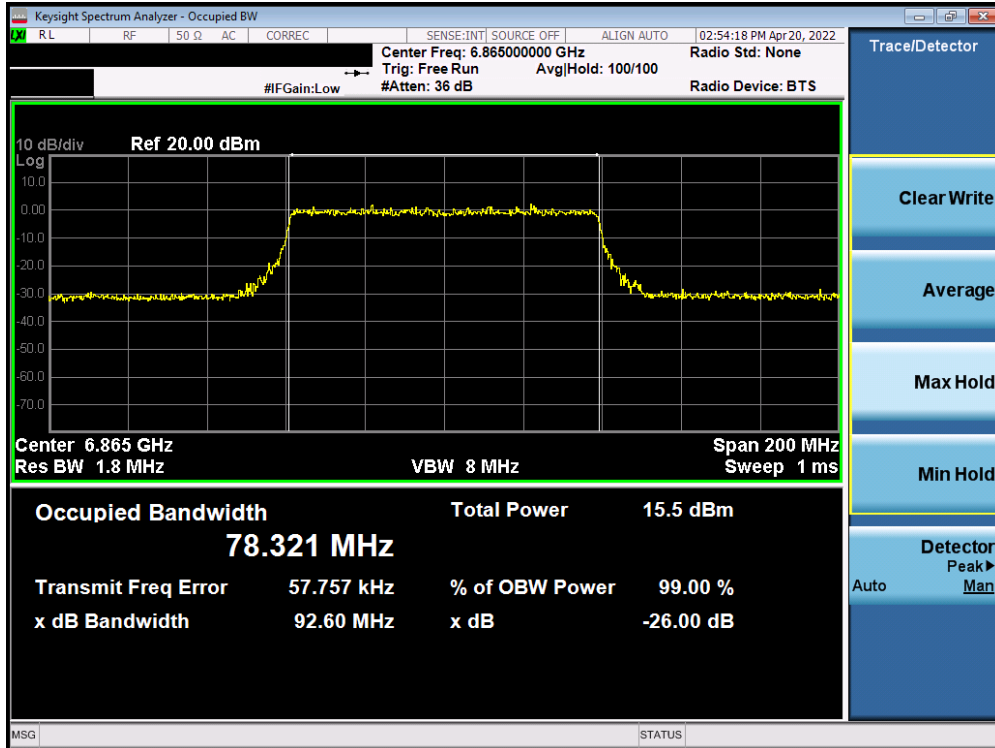


Plot 7-309. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 183)

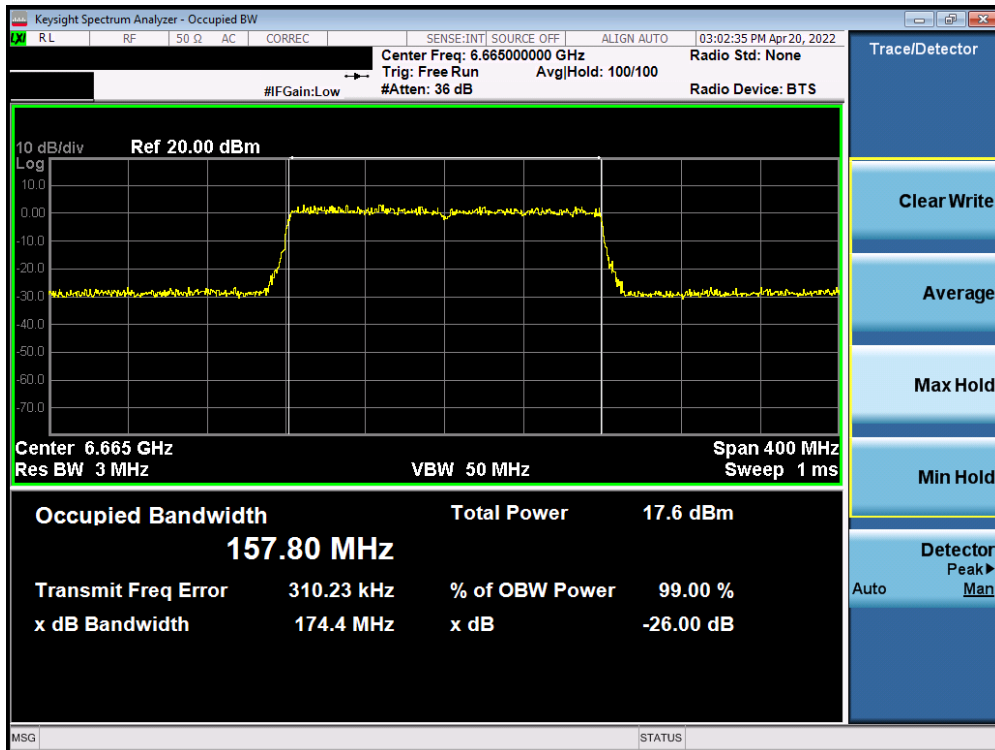


Plot 7-310. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 143)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 171 of 630

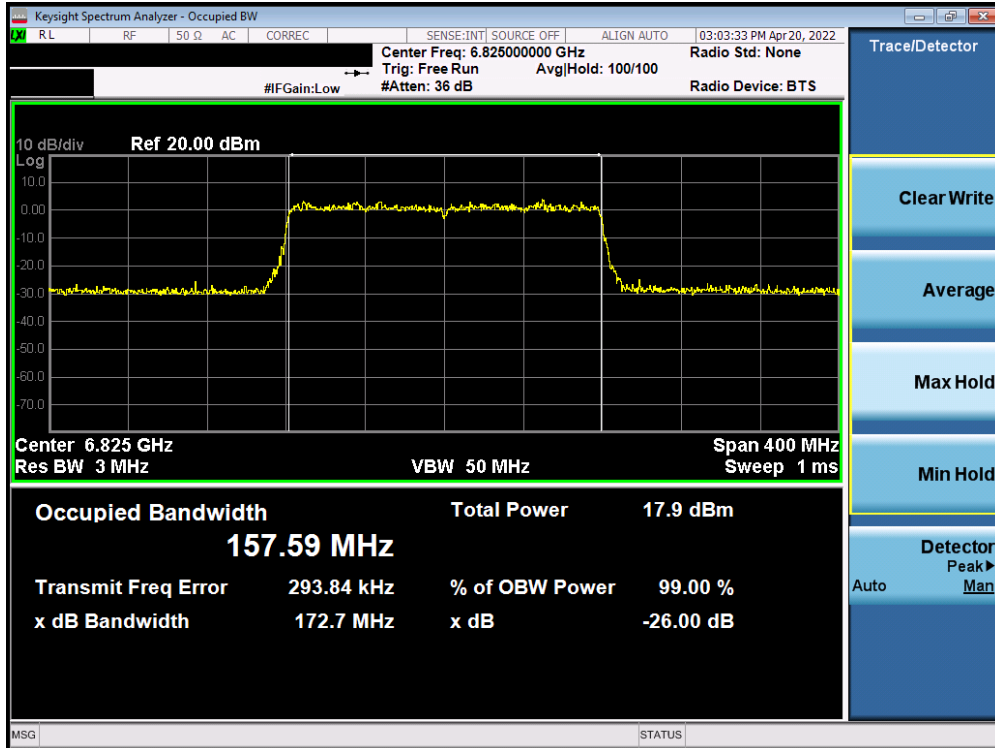


Plot 7-311. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 175)

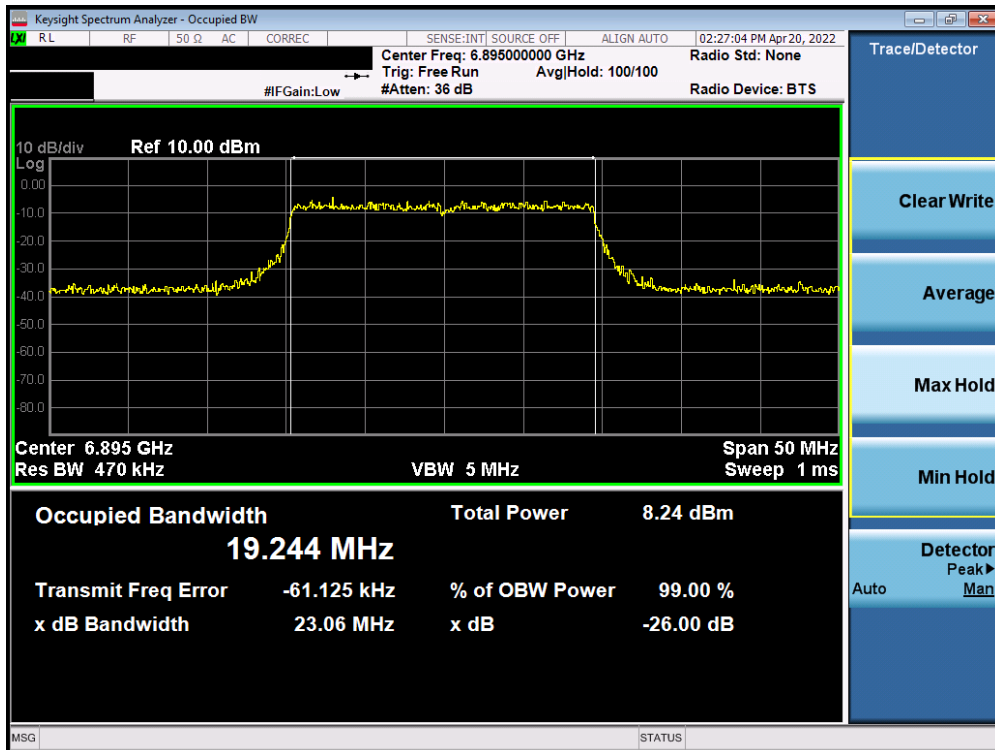


Plot 7-312. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 189)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 172 of 630

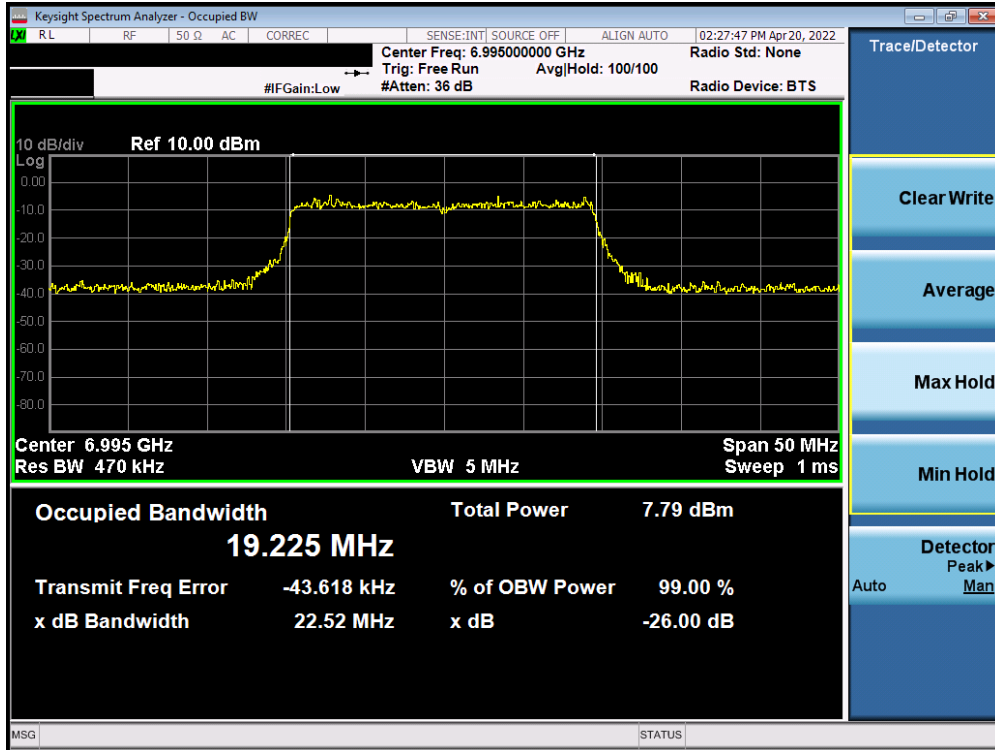


Plot 7-313. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 209)

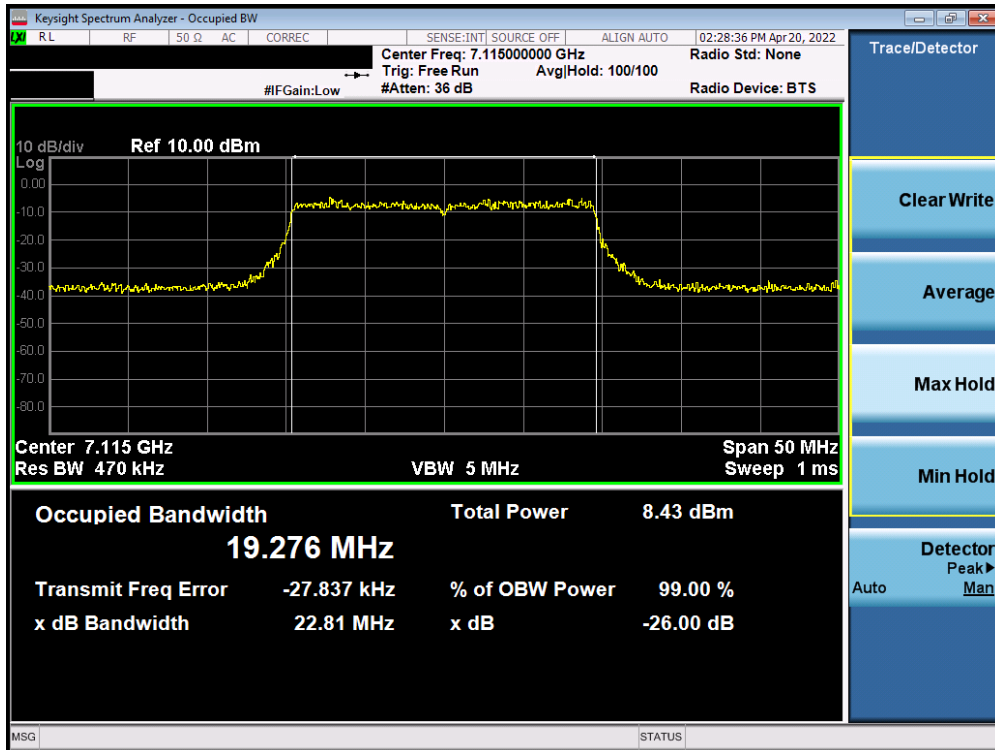


Plot 7-314. Occupied Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 233)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 173 of 630

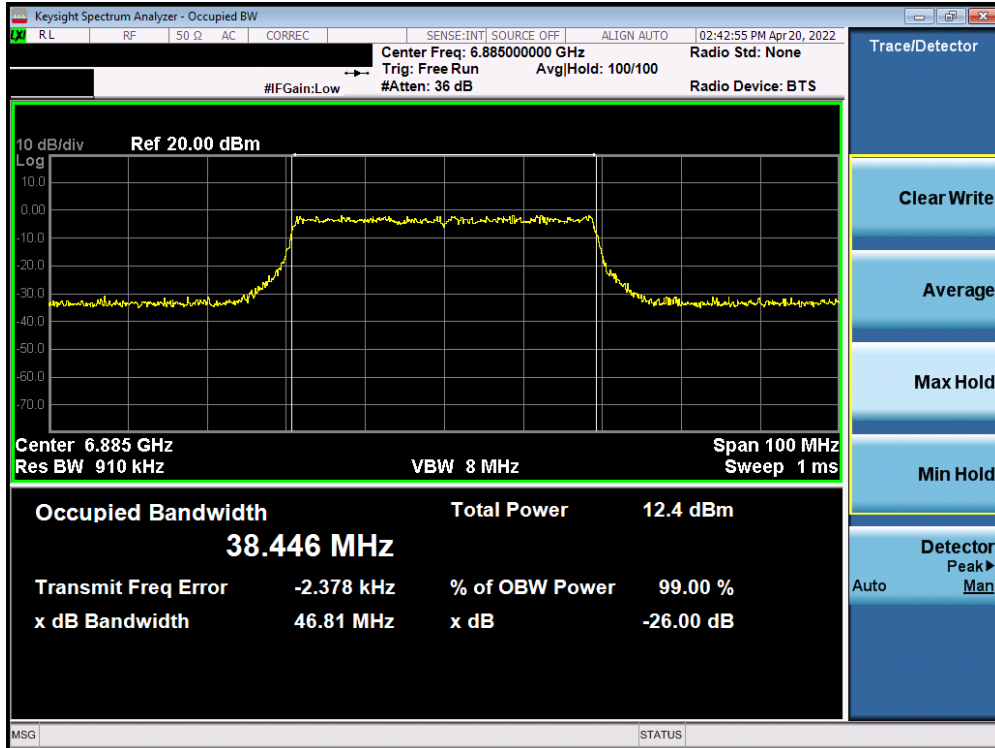


Plot 7-315. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 187)

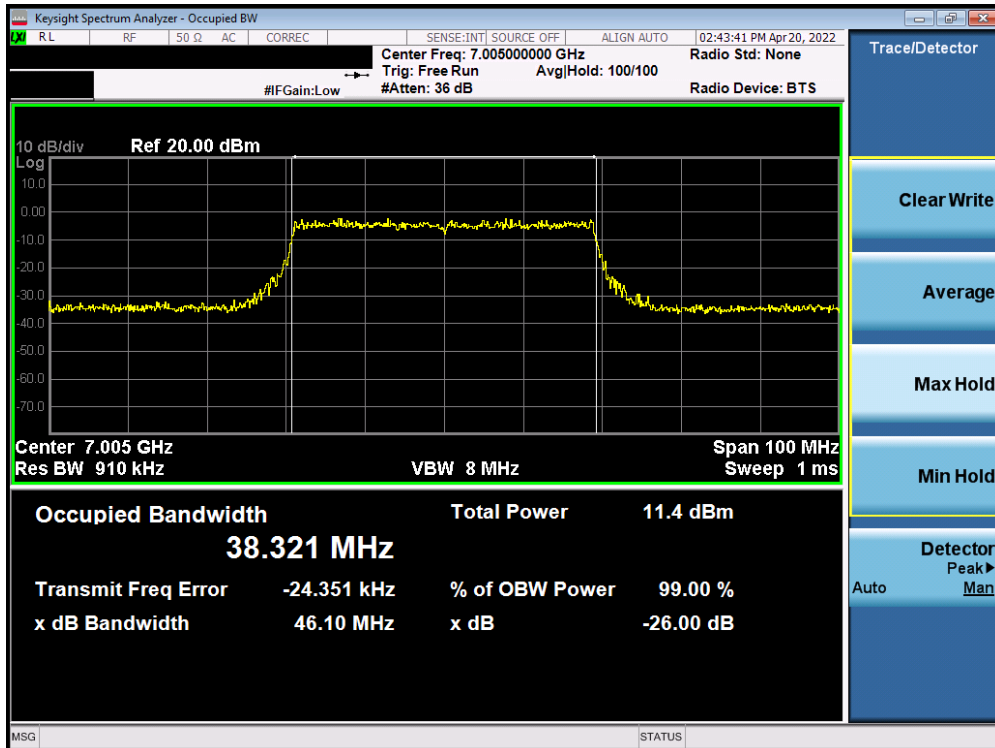


Plot 7-316. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 211)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 174 of 630

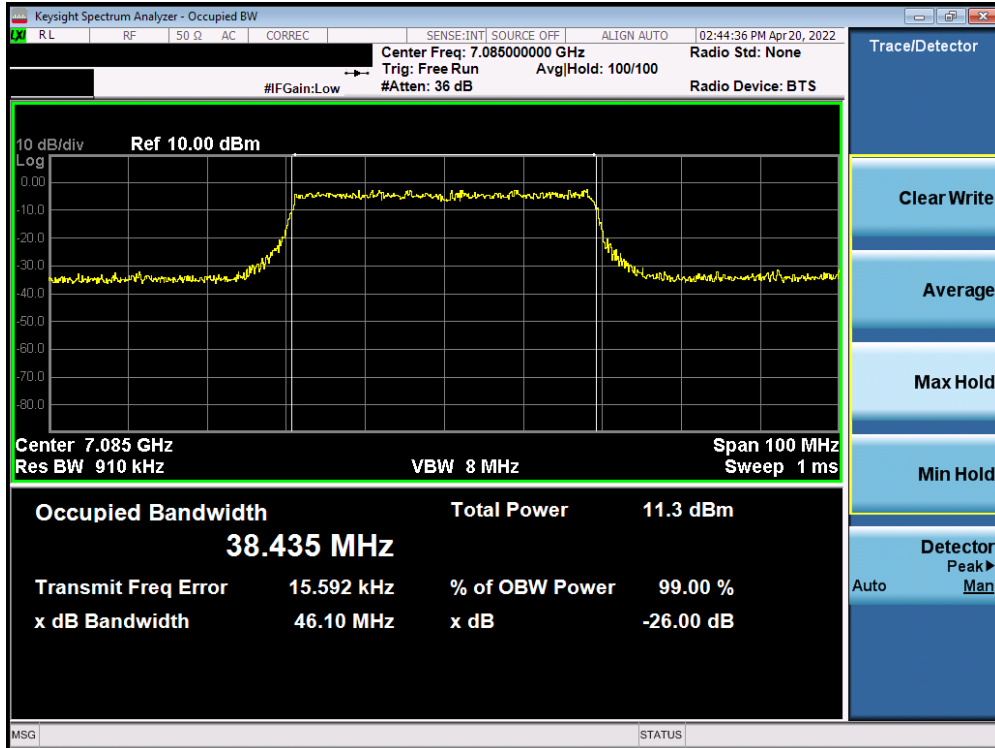


Plot 7-317. Occupied Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 227)

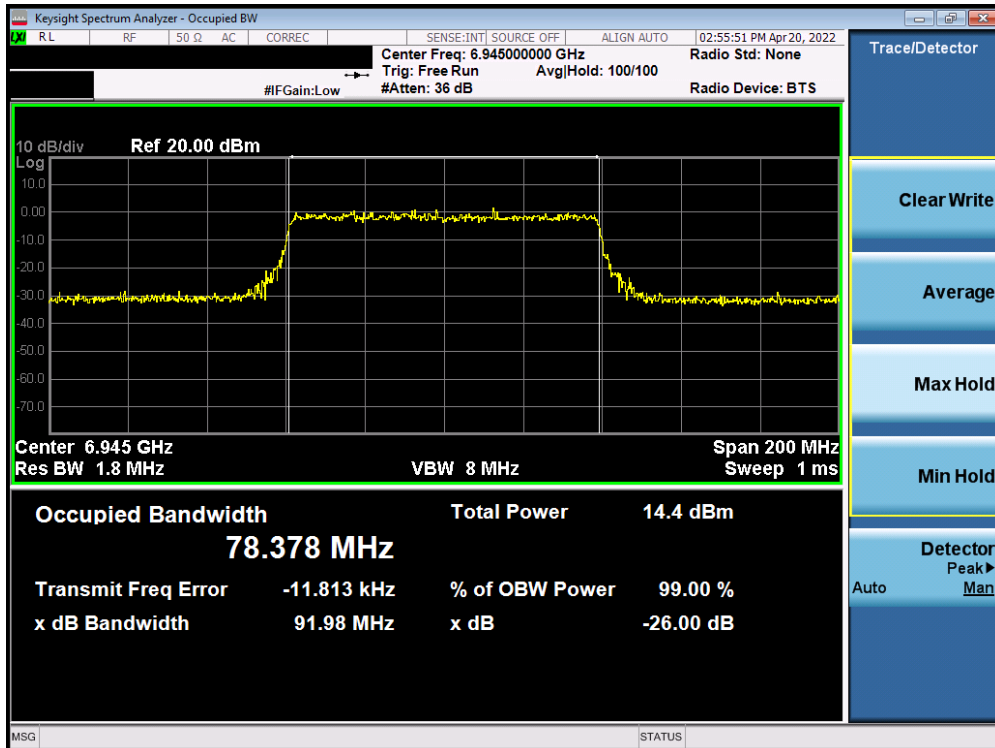


Plot 7-318. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 199)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 175 of 630

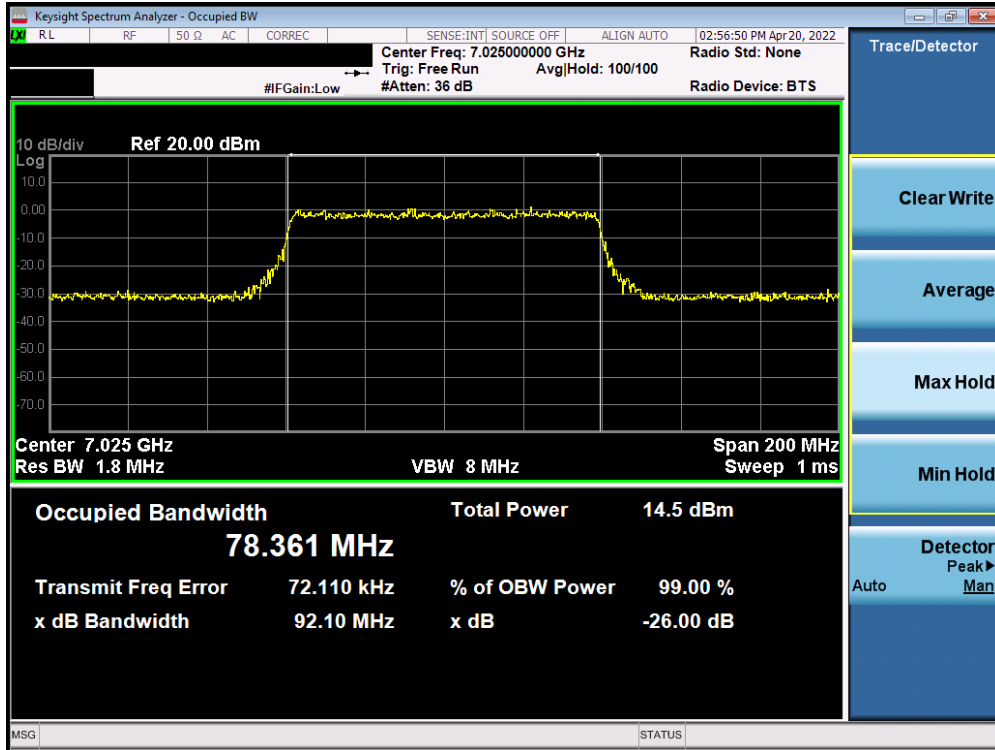

Plot 7-319. Occupied Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 215)

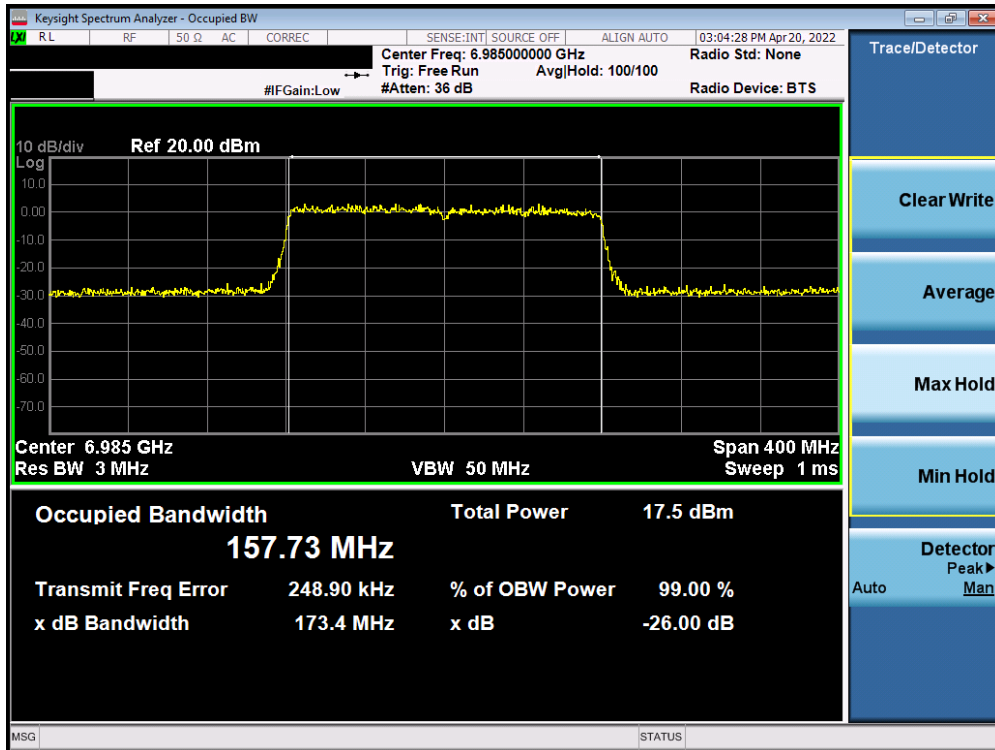

Plot 7-320. Occupied Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 207)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 176 of 630

7.3 UNII Output Power Measurement – 802.11ax
§ 2.1046, §15.407(a)(11), §15.407(a)(8)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
 KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 177 of 630

SISO ANT1 Maximum Conducted Output Power Measurements (26 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	4	8				
5	5935	2	26T	-2.15	-2.17	-2.16	3.50	1.35	24.00	-22.65	
	6175	45	26T	-2.04	-2.37	-2.39	3.50	1.46	24.00	-22.54	
	6415	93	26T	-2.39	-2.33	-2.42	3.50	1.17	24.00	-22.83	
6	6435	97	26T	-1.68	-1.77	-1.84	3.40	1.72	24.00	-22.28	
	6475	105	26T	-1.70	-1.68	-1.76	3.40	1.72	24.00	-22.28	
	6515	113	26T	-1.65	-1.61	-1.77	3.40	1.79	24.00	-22.21	
7	6535	117	26T	-1.84	-1.83	-1.99	3.40	1.57	24.00	-22.43	
	6695	149	26T	-1.73	-1.67	-1.86	3.40	1.73	24.00	-22.27	
	6875	185	26T	-1.62	-1.58	-1.66	3.40	1.82	24.00	-22.18	
8	6895	189	26T	-1.51	-1.76	-1.53	3.50	1.99	24.00	-22.01	
	6995	209	26T	-1.81	-1.81	-1.86	3.50	1.69	24.00	-22.31	
	7115	233	26T	-4.30	-4.36	-4.40	3.50	-0.80	24.00	-24.80	

Table 7-2. SISO ANT1 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	8	17				
5	5965	3	26T	-2.28	-2.15	-2.01	3.50	1.49	24.00	-22.51	
	6165	43	26T	-2.17	-2.35	-2.06	3.50	1.44	24.00	-22.56	
	6405	91	26T	-2.19	-2.33	-2.06	3.50	1.44	24.00	-22.56	
6	6445	99	26T	-1.77	-1.55	-1.88	3.40	1.85	24.00	-22.15	
	6485	107	26T	-1.92	-1.65	-1.66	3.40	1.75	24.00	-22.25	
	6525	115	26T	-1.57	-1.83	-1.81	3.40	1.83	24.00	-22.17	
7	6565	123	26T	-1.98	-1.65	-1.53	3.40	1.87	24.00	-22.13	
	6725	155	26T	-1.51	-1.74	-1.52	3.40	1.89	24.00	-22.11	
	6845	179	26T	-1.51	-1.79	-1.72	3.40	1.89	24.00	-22.11	
8	6885	187	26T	-1.93	-1.70	-1.53	3.50	1.97	24.00	-22.03	
	7005	211	26T	-1.51	-1.65	-1.75	3.50	1.99	24.00	-22.01	
	7085	227	26T	-1.62	-1.93	-1.85	3.50	1.88	24.00	-22.12	

Table 7-3. SISO ANT1 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	18	36				
5	5985	7	26T	-2.02	-2.19	-2.34	3.50	1.48	24.00	-22.52	
	6145	39	26T	-2.43	-2.03	-2.21	3.50	1.47	24.00	-22.53	
	6385	87	26T	-2.04	-2.01	-2.14	3.50	1.49	24.00	-22.51	
6	6465	103	26T	-1.70	-1.82	-1.60	3.40	1.80	24.00	-22.20	
7	6545	119	26T	-1.63	-1.52	-1.75	3.40	1.88	24.00	-22.12	
	6705	151	26T	-1.72	-1.85	-1.77	3.40	1.68	24.00	-22.32	
	6865	183	26T	-1.84	-1.62	-1.70	3.40	1.78	24.00	-22.22	
8	6945	199	26T	-1.68	-1.51	-1.82	3.50	1.99	24.00	-22.01	
	7025	215	26T	-1.93	-1.51	-1.78	3.50	1.99	24.00	-22.01	

Table 7-4. SISO ANT1 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 178 of 630

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	36L	36U				
5	6025	15	26T	-2.04	-2.35	-2.05	3.50	1.46	24.00	-22.54	
	6185	47	26T	-2.30	-2.01	-2.42	3.50	1.49	24.00	-22.51	
	6345	79	26T	-2.09	-2.31	-2.38	3.50	1.41	24.00	-22.59	
6	6505	111	26T	-1.96	-1.78	-1.73	3.40	1.67	24.00	-22.33	
7	6665	143	26T	-1.73	-1.77	-1.85	3.40	1.67	24.00	-22.33	
	6825	175	26T	-1.73	-1.53	-1.92	3.40	1.87	24.00	-22.13	
8	6985	207	26T	-1.53	-1.68	-2.04	3.50	1.97	24.00	-22.03	

Table 7-5. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 179 of 630

SISO ANT1 Maximum Conducted Output Power Measurements (52 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	39	40				
5	5935	2	52T	-1.36	-1.56	-1.38	3.50	2.14	24.00	-21.86	
	6175	45	52T	-1.57	-1.04	-1.51	3.50	2.46	24.00	-21.54	
	6415	93	52T	-1.01	-1.12	-1.55	3.50	2.49	24.00	-21.51	
6	6435	97	52T	-1.44	-1.08	-1.02	3.40	2.38	24.00	-21.62	
	6475	105	52T	-1.43	-1.22	-1.03	3.40	2.37	24.00	-21.63	
	6515	113	52T	-1.34	-1.24	-1.02	3.40	2.38	24.00	-21.62	
7	6535	117	52T	-1.07	-1.43	-1.17	3.40	2.33	24.00	-21.67	
	6695	149	52T	-1.03	-1.32	-1.10	3.40	2.37	24.00	-21.63	
	6875	185	52T	-1.24	-1.06	-1.36	3.40	2.34	24.00	-21.66	
8	6895	189	52T	-1.14	-1.36	-1.14	3.50	2.36	24.00	-21.64	
	6995	209	52T	-1.01	-1.30	-1.05	3.50	2.49	24.00	-21.51	
	7115	233	52T	-3.37	-3.22	-3.38	3.50	0.28	24.00	-23.72	

Table 7-6. SISO ANT1 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	40	44				
5	5965	3	52T	-1.22	-1.47	-1.32	3.50	2.28	24.00	-21.72	
	6165	43	52T	-1.59	-1.05	-1.42	3.50	2.45	24.00	-21.55	
	6405	91	52T	-1.01	-1.02	-1.39	3.50	2.49	24.00	-21.51	
6	6445	99	52T	-1.21	-1.33	-1.17	3.40	2.23	24.00	-21.77	
	6485	107	52T	-1.23	-1.18	-1.10	3.40	2.30	24.00	-21.70	
	6525	115	52T	-1.10	-1.17	-1.10	3.40	2.30	24.00	-21.70	
7	6565	123	52T	-1.18	-1.38	-1.27	3.40	2.22	24.00	-21.78	
	6725	155	52T	-1.19	-1.45	-1.21	3.40	2.21	24.00	-21.79	
	6845	179	52T	-1.03	-1.08	-1.10	3.40	2.37	24.00	-21.63	
8	6885	187	52T	-1.36	-1.23	-1.06	3.50	2.44	24.00	-21.56	
	7005	211	52T	-1.43	-1.18	-1.03	3.50	2.47	24.00	-21.53	
	7085	227	52T	-1.05	-1.32	-1.29	3.50	2.45	24.00	-21.55	

Table 7-7. SISO ANT1 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	40	44				
5	5985	7	52T	-1.26	-1.37	-1.04	3.50	2.46	24.00	-21.54	
	6145	39	52T	-1.19	-1.25	-1.01	3.50	2.49	24.00	-21.51	
	6385	87	52T	-1.34	-1.40	-1.05	3.50	2.45	24.00	-21.55	
6	6465	103	52T	-1.19	-1.25	-1.10	3.40	2.30	24.00	-21.70	
7	6545	119	52T	-1.17	-1.33	-1.23	3.40	2.23	24.00	-21.77	
	6705	151	52T	-1.23	-1.35	-1.33	3.40	2.17	24.00	-21.83	
	6865	183	52T	-1.38	-1.13	-1.19	3.40	2.27	24.00	-21.73	
8	6945	199	52T	-1.14	-1.02	-1.28	3.50	2.48	24.00	-21.52	
	7025	215	52T	-1.31	-1.13	-1.19	3.50	2.37	24.00	-21.63	

Table 7-8. SISO ANT1 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 180 of 630

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	52L	52U				
5	6025	15	52T	-1.22	-1.01	-1.25	3.50	2.49	24.00	-21.51	
	6185	47	52T	-1.24	-1.03	-1.14	3.50	2.47	24.00	-21.53	
	6345	79	52T	-1.83	-1.34	-1.51	3.50	2.16	24.00	-21.84	
6	6505	111	52T	-2.12	-1.77	-2.13	3.40	1.63	24.00	-22.37	
7	6665	143	52T	-1.59	-1.42	-2.29	3.40	1.98	24.00	-22.02	
	6825	175	52T	-1.92	-1.49	-2.57	3.40	1.91	24.00	-22.09	
8	6985	207	52T	-1.54	-1.22	-2.28	3.50	2.28	24.00	-21.72	

Table 7-9. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 181 of 630

SISO ANT1 Maximum Conducted Output Power Measurements (106 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					53	54				
5	5935	2	106T	1.18	1.15	3.50	4.68	24.00	-19.32	
	6175	45	106T	1.05	1.03	3.50	4.55	24.00	-19.45	
	6415	93	106T	1.48	1.04	3.50	4.98	24.00	-19.02	
6	6435	97	106T	1.09	1.06	3.40	4.49	24.00	-19.51	
	6475	105	106T	1.18	1.11	3.40	4.58	24.00	-19.42	
	6515	113	106T	1.18	1.15	3.40	4.58	24.00	-19.42	
7	6535	117	106T	1.12	1.05	3.40	4.52	24.00	-19.48	
	6695	149	106T	1.10	1.14	3.40	4.54	24.00	-19.46	
	6875	185	106T	1.23	1.11	3.40	4.63	24.00	-19.37	
8	6895	189	106T	1.39	1.30	3.50	4.89	24.00	-19.11	
	6995	209	106T	1.47	1.39	3.50	4.97	24.00	-19.03	
	7115	233	106T	-1.57	-1.63	3.50	1.93	24.00	-22.07	

Table 7-10. SISO ANT1 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					53	54	56				
5	5965	3	106T	1.27	1.35	1.21	3.50	4.85	24.00	-19.15	
	6165	43	106T	1.02	1.16	1.38	3.50	4.88	24.00	-19.12	
	6405	91	106T	0.98	1.01	1.19	3.50	4.69	24.00	-19.31	
6	6445	99	106T	1.28	1.14	1.35	3.40	4.75	24.00	-19.25	
	6485	107	106T	1.25	1.17	1.35	3.40	4.75	24.00	-19.25	
	6525	115	106T	1.41	1.25	1.28	3.40	4.81	24.00	-19.19	
7	6565	123	106T	1.15	1.03	1.15	3.40	4.55	24.00	-19.45	
	6725	155	106T	1.35	1.18	1.26	3.40	4.75	24.00	-19.25	
	6845	179	106T	1.49	1.41	1.43	3.40	4.89	24.00	-19.11	
8	6885	187	106T	1.15	1.48	1.45	3.50	4.98	24.00	-19.02	
	7005	211	106T	1.49	1.30	1.38	3.50	4.99	24.00	-19.01	
	7085	227	106T	1.40	1.18	1.49	3.50	4.99	24.00	-19.01	

Table 7-11. SISO ANT1 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					53	56	60				
5	5985	7	106T	1.24	1.07	1.49	3.50	4.99	24.00	-19.01	
	6145	39	106T	1.33	1.16	1.44	3.50	4.94	24.00	-19.06	
	6385	87	106T	1.49	1.48	1.26	3.50	4.99	24.00	-19.01	
6	6465	103	106T	1.32	1.14	1.35	3.40	4.75	24.00	-19.25	
7	6545	119	106T	1.32	1.08	1.22	3.40	4.72	24.00	-19.28	
	6705	151	106T	1.18	1.04	1.15	3.40	4.58	24.00	-19.42	
	6865	183	106T	1.49	1.38	1.31	3.40	4.89	24.00	-19.11	
8	6945	199	106T	1.29	1.49	1.08	3.50	4.99	24.00	-19.01	
	7025	215	106T	1.49	1.42	1.22	3.50	4.99	24.00	-19.01	

Table 7-12. SISO ANT1 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 182 of 630

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					53	60L	60U				
5	6025	15	106T	1.16	1.26	1.16	3.50	4.76	24.00	-19.24	
	6185	47	106T	1.43	1.41	1.39	3.50	4.93	24.00	-19.07	
	6345	79	106T	1.21	1.10	0.98	3.50	4.71	24.00	-19.29	
6	6505	111	106T	1.19	0.73	0.98	3.40	4.59	24.00	-19.41	
7	6665	143	106T	1.07	0.98	0.81	3.40	4.47	24.00	-19.53	
	6825	175	106T	0.86	0.80	0.83	3.40	4.26	24.00	-19.74	
8	6985	207	106T	1.38	1.29	0.86	3.50	4.88	24.00	-19.12	

Table 7-13. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 183 of 630

SISO ANT1 Maximum Conducted Output Power Measurements (242 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					61					
5		5935	2	242T	6.41		3.50	9.91	24.00	-14.09
		6175	45	242T	6.64		3.50	10.14	24.00	-13.86
		6415	93	242T	6.91		3.50	10.41	24.00	-13.59
6		6435	97	242T	6.25		3.40	9.65	24.00	-14.35
		6475	105	242T	6.97		3.40	10.37	24.00	-13.63
		6515	113	242T	6.93		3.40	10.33	24.00	-13.67
7		6535	117	242T	6.75		3.40	10.15	24.00	-13.85
		6695	149	242T	6.83		3.40	10.23	24.00	-13.77
		6875	185	242T	6.54		3.40	9.94	24.00	-14.06
8		6895	189	242T	6.56		3.50	10.06	24.00	-13.94
		6995	209	242T	6.37		3.50	9.87	24.00	-14.13
		7115	233	242T	3.23		3.50	6.73	24.00	-17.27

Table 7-14. SISO ANT1 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					61	62				
5		5965	3	242T	6.37	6.20	3.50	9.87	24.00	-14.13
		6165	43	242T	6.63	6.52	3.50	10.13	24.00	-13.87
		6405	91	242T	6.67	6.84	3.50	10.34	24.00	-13.66
6		6445	99	242T	5.86	6.96	3.40	10.36	24.00	-13.64
		6485	107	242T	5.73	6.92	3.40	10.32	24.00	-13.68
		6525	115	242T	6.98	6.97	3.40	10.38	24.00	-13.62
7		6565	123	242T	6.70	6.66	3.40	10.10	24.00	-13.90
		6725	155	242T	6.69	6.72	3.40	10.12	24.00	-13.88
		6845	179	242T	6.71	6.58	3.40	10.11	24.00	-13.89
8		6885	187	242T	6.79	6.61	3.50	10.29	24.00	-13.71
		7005	211	242T	6.55	6.35	3.50	10.05	24.00	-13.95
		7085	227	242T	6.77	6.49	3.50	10.27	24.00	-13.73

Table 7-15. SISO ANT1 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 184 of 630

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					61	62	64				
5	5985	7	242T	6.38	6.35	6.69	3.50	10.19	24.00	-13.81	
	6145	39	242T	6.62	6.57	6.83	3.50	10.33	24.00	-13.67	
	6385	87	242T	6.94	6.88	6.77	3.50	10.44	24.00	-13.56	
6	6465	103	242T	5.87	5.84	5.82	3.40	9.27	24.00	-14.73	
7	6545	119	242T	5.92	5.74	5.69	3.40	9.32	24.00	-14.68	
	6705	151	242T	5.93	5.87	5.91	3.40	9.33	24.00	-14.67	
	6865	183	242T	6.38	6.23	5.93	3.40	9.78	24.00	-14.22	
8	6945	199	242T	6.61	6.45	5.94	3.50	10.11	24.00	-13.89	
	7025	215	242T	6.65	6.39	6.21	3.50	10.15	24.00	-13.85	

Table 7-16. SISO ANT1 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					61	64L	64U				
5	6025	15	242T	6.32	6.92	6.99	3.50	10.49	24.00	-13.51	
	6185	47	242T	6.61	6.71	6.90	3.50	10.40	24.00	-13.60	
	6345	79	242T	6.51	6.73	6.77	3.50	10.27	24.00	-13.73	
6	6505	111	242T	6.87	6.99	6.59	3.40	10.39	24.00	-13.61	
7	6665	143	242T	6.45	6.71	6.23	3.40	10.11	24.00	-13.89	
	6825	175	242T	6.98	6.67	6.53	3.40	10.38	24.00	-13.62	
8	6985	207	242T	6.85	6.61	6.14	3.50	10.35	24.00	-13.65	

Table 7-17. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 185 of 630

SISO ANT1 Maximum Conducted Output Power Measurements (484 Tones)

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					65					
5		5965	3	484T	9.71		3.50	13.21	24.00	-10.79
		6165	43	484T	9.39		3.50	12.89	24.00	-11.11
		6405	91	484T	9.90		3.50	13.40	24.00	-10.60
6		6445	99	484T	9.73		3.40	13.13	24.00	-10.87
		6485	107	484T	9.67		3.40	13.07	24.00	-10.93
		6525	115	484T	9.87		3.40	13.27	24.00	-10.73
7		6565	123	484T	9.84		3.40	13.24	24.00	-10.76
		6725	155	484T	9.97		3.40	13.37	24.00	-10.63
		6845	179	484T	9.83		3.40	13.23	24.00	-10.77
8		6885	187	484T	9.87		3.50	13.37	24.00	-10.63
		7005	211	484T	9.65		3.50	13.15	24.00	-10.85
		7085	227	484T	9.72		3.50	13.22	24.00	-10.78

Table 7-18. SISO ANT1 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					65	66				
5		5985	7	484T	9.59	9.83	3.50	13.33	24.00	-10.67
		6145	39	484T	9.47	9.54	3.50	13.04	24.00	-10.96
		6385	87	484T	9.54	9.71	3.50	13.21	24.00	-10.79
6		6465	103	484T	9.79	9.69	3.40	13.19	24.00	-10.81
7		6545	119	484T	9.88	9.76	3.40	13.28	24.00	-10.72
		6705	151	484T	9.76	9.81	3.40	13.21	24.00	-10.79
		6865	183	484T	9.60	9.81	3.40	13.21	24.00	-10.79
8		6945	199	484T	9.49	9.54	3.50	13.04	24.00	-10.96
		7025	215	484T	9.45	9.58	3.50	13.08	24.00	-10.92

Table 7-19. SISO ANT1 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					65	66L	66U				
5		6025	15	484T	9.17	9.62	9.61	3.50	13.12	24.00	-10.88
		6185	47	484T	8.91	9.23	9.69	3.50	13.19	24.00	-10.81
		6345	79	484T	9.09	9.49	9.61	3.50	13.11	24.00	-10.89
6		6505	111	484T	9.59	9.71	9.53	3.40	13.11	24.00	-10.89
7		6665	143	484T	9.74	9.84	9.37	3.40	13.24	24.00	-10.76
		6825	175	484T	9.59	9.41	8.73	3.40	12.99	24.00	-11.01
8		6985	207	484T	9.60	9.24	8.47	3.50	13.10	24.00	-10.90

Table 7-20. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 186 of 630

SISO ANT1 Maximum Conducted Output Power Measurements (996 Tones)

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index				
					67				
5	5985	7	996T	12.70	3.50	16.20	24.00	-7.80	
	6145	39	996T	12.48	3.50	15.98	24.00	-8.02	
	6385	87	996T	12.59	3.50	16.09	24.00	-7.91	
6	6465	103	996T	12.80	3.40	16.20	24.00	-7.80	
7	6545	119	996T	12.75	3.40	16.15	24.00	-7.85	
	6705	151	996T	12.79	3.40	16.19	24.00	-7.81	
	6865	183	996T	12.90	3.40	16.30	24.00	-7.70	
8	6945	199	996T	12.82	3.50	16.32	24.00	-7.68	
	7025	215	996T	12.74	3.50	16.24	24.00	-7.76	

Table 7-21. SISO ANT1 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					67(L)	67U				
5	6025	15	996T	12.37	12.57	3.50	16.07	24.00	-7.93	
	6185	47	996T	12.01	12.52	3.50	16.02	24.00	-7.98	
	6345	79	996T	12.23	12.62	3.50	16.12	24.00	-7.88	
6	6505	111	996T	12.59	12.53	3.40	15.99	24.00	-8.01	
7	6665	143	996T	12.74	12.47	3.40	16.14	24.00	-7.86	
	6825	175	996T	12.93	12.41	3.40	16.33	24.00	-7.67	
8	6985	207	996T	12.81	12.08	3.50	16.31	24.00	-7.69	

Table 7-22. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 187 of 630



SISO ANT1 Maximum Conducted Output Power Measurements (2x996 Tones)

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index				
					68				
5	6025	15	2x996T	12.58	3.50	16.08	24.00	-7.92	
	6185	47	2x996T	12.39	3.50	15.89	24.00	-8.11	
	6345	79	2x996T	12.44	3.50	15.94	24.00	-8.06	
6	6505	111	2x996T	12.67	3.40	16.07	24.00	-7.93	
7	6665	143	2x996T	12.58	3.40	15.98	24.00	-8.02	
	6825	175	2x996T	12.76	3.40	16.16	24.00	-7.84	
8	6985	207	2x996T	12.69	3.50	16.19	24.00	-7.81	

Table 7-23. SISO ANT1 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 188 of 630

SISO ANT2 Maximum Conducted Output Power Measurements (26 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	4	8				
5	5935	2	26T	-2.12	-2.45	-2.05	3.20	1.15	24.00	-22.85	
	6175	45	26T	-2.39	-2.22	-2.35	3.20	0.98	24.00	-23.02	
	6415	93	26T	-2.02	-2.37	-2.13	3.20	1.18	24.00	-22.82	
6	6435	97	26T	-1.51	-1.94	-1.81	2.40	0.89	24.00	-23.11	
	6475	105	26T	-1.88	-1.84	-1.55	2.40	0.85	24.00	-23.15	
	6515	113	26T	-1.87	-1.76	-1.63	2.40	0.77	24.00	-23.23	
7	6535	117	26T	-1.52	-2.02	-1.55	3.30	1.78	24.00	-22.22	
	6695	149	26T	-1.56	-1.61	-1.77	3.30	1.74	24.00	-22.26	
	6875	185	26T	-1.95	-1.80	-2.08	3.30	1.50	24.00	-22.50	
8	6895	189	26T	-1.72	-1.74	-1.77	3.30	1.58	24.00	-22.42	
	6995	209	26T	-1.51	-1.52	-1.62	3.30	1.79	24.00	-22.21	
	7115	233	26T	-4.29	-4.23	-4.24	3.30	-0.93	24.00	-24.93	

Table 7-24. SISO ANT2 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	8	17				
5	5965	3	26T	-2.33	-2.02	-2.46	3.20	1.18	24.00	-22.82	
	6165	43	26T	-2.11	-2.03	-2.37	3.20	1.17	24.00	-22.83	
	6405	91	26T	-2.04	-2.23	-2.19	3.20	1.16	24.00	-22.84	
6	6445	99	26T	-1.55	-1.91	-1.91	2.40	0.85	24.00	-23.15	
	6485	107	26T	-1.95	-1.96	-1.79	2.40	0.61	24.00	-23.39	
	6525	115	26T	-1.71	-1.78	-1.59	2.40	0.81	24.00	-23.19	
7	6565	123	26T	-1.72	-1.99	-2.13	3.30	1.58	24.00	-22.42	
	6725	155	26T	-1.80	-1.56	-1.52	3.30	1.78	24.00	-22.22	
	6845	179	26T	-1.51	-1.80	-1.68	3.30	1.79	24.00	-22.21	
8	6885	187	26T	-1.56	-1.52	-1.80	3.30	1.78	24.00	-22.22	
	7005	211	26T	-1.76	-1.95	-1.70	3.30	1.60	24.00	-22.40	
	7085	227	26T	-1.62	-1.99	-1.87	3.30	1.68	24.00	-22.32	

Table 7-25. SISO ANT2 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	18	36				
5	5985	7	26T	-2.26	-2.41	-2.09	3.20	1.11	24.00	-22.89	
	6145	39	26T	-2.02	-2.21	-2.46	3.20	1.18	24.00	-22.82	
	6385	87	26T	-2.07	-2.34	-2.01	3.20	1.19	24.00	-22.81	
6	6465	103	26T	-1.68	-1.51	-1.86	2.40	0.89	24.00	-23.11	
7	6545	119	26T	-1.76	-1.79	-1.67	3.30	1.63	24.00	-22.37	
	6705	151	26T	-1.72	-1.89	-1.85	3.30	1.58	24.00	-22.42	
	6865	183	26T	-1.75	-1.90	-2.09	3.30	1.55	24.00	-22.45	
8	6945	199	26T	-1.58	-1.86	-1.59	3.30	1.72	24.00	-22.28	
	7025	215	26T	-1.64	-1.65	-1.86	3.30	1.66	24.00	-22.34	

Table 7-26. SISO ANT2 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 189 of 630



160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					0	36L	36U				
					5	6025	15				
	6185	47	26T	-2.17	-2.16	-2.23	3.20	1.04	24.00	-22.96	
	6345	79	26T	-2.50	-2.01	-2.48	3.20	1.19	24.00	-22.81	
6	6505	111	26T	-2.24	-2.22	-2.29	2.40	0.18	24.00	-23.82	
7	6665	143	26T	-2.22	-2.04	-2.01	3.30	1.29	24.00	-22.71	
	6825	175	26T	-2.02	-2.27	-2.71	3.30	1.28	24.00	-22.72	
8	6985	207	26T	-2.23	-2.12	-2.31	3.30	1.18	24.00	-22.82	

Table 7-27. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 190 of 630

SISO ANT2 Maximum Conducted Output Power Measurements (52 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	39	40				
5	5935	2	52T	-1.07	-1.17	-1.33	3.20	2.13	24.00	-21.87	
	6175	45	52T	-1.39	-1.11	-1.36	3.20	2.09	24.00	-21.91	
	6415	93	52T	-1.06	-1.27	-1.06	3.20	2.14	24.00	-21.86	
6	6435	97	52T	-1.05	-1.17	-1.18	2.40	1.35	24.00	-22.65	
	6475	105	52T	-1.51	-1.22	-1.04	2.40	1.36	24.00	-22.64	
	6515	113	52T	-1.30	-1.24	-1.10	2.40	1.30	24.00	-22.70	
7	6535	117	52T	-1.34	-1.64	-1.38	3.30	1.96	24.00	-22.04	
	6695	149	52T	-1.12	-1.45	-1.33	3.30	2.18	24.00	-21.82	
	6875	185	52T	-1.32	-1.26	-1.01	3.30	2.29	24.00	-21.71	
8	6895	189	52T	-1.31	-1.13	-1.39	3.30	2.17	24.00	-21.83	
	6995	209	52T	-1.15	-1.49	-1.22	3.30	2.15	24.00	-21.85	
	7115	233	52T	-3.36	-3.02	-3.33	3.30	0.28	24.00	-23.72	

Table 7-28. SISO ANT2 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	40	44				
5	5965	3	52T	-1.27	-1.41	-1.03	3.20	2.17	24.00	-21.83	
	6165	43	52T	-1.25	-1.38	-1.18	3.20	2.02	24.00	-21.98	
	6405	91	52T	-1.19	-1.10	-1.06	3.20	2.14	24.00	-21.86	
6	6445	99	52T	-1.02	-1.34	-1.39	2.40	1.38	24.00	-22.62	
	6485	107	52T	-1.37	-1.19	-1.10	2.40	1.30	24.00	-22.70	
	6525	115	52T	-1.15	-1.50	-1.52	2.40	1.25	24.00	-22.75	
7	6565	123	52T	-1.35	-1.64	-1.53	3.30	1.95	24.00	-22.05	
	6725	155	52T	-1.53	-1.03	-1.46	3.30	2.27	24.00	-21.73	
	6845	179	52T	-1.07	-1.23	-1.20	3.30	2.23	24.00	-21.77	
8	6885	187	52T	-1.13	-1.47	-1.32	3.30	2.17	24.00	-21.83	
	7005	211	52T	-1.27	-1.34	-1.04	3.30	2.26	24.00	-21.74	
	7085	227	52T	-1.13	-1.39	-1.38	3.30	2.17	24.00	-21.83	

Table 7-29. SISO ANT2 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	40	44				
5	5985	7	52T	-1.11	-1.24	-1.02	3.20	2.18	24.00	-21.82	
	6145	39	52T	-1.07	-1.19	-1.35	3.20	2.13	24.00	-21.87	
	6385	87	52T	-1.32	-1.10	-1.36	3.20	2.10	24.00	-21.90	
6	6465	103	52T	-1.11	-1.02	-1.21	2.40	1.38	24.00	-22.62	
7	6545	119	52T	-1.05	-1.31	-1.62	3.30	2.25	24.00	-21.75	
	6705	151	52T	-1.26	-1.44	-1.38	3.30	2.04	24.00	-21.96	
	6865	183	52T	-1.05	-1.27	-1.33	3.30	2.25	24.00	-21.75	
8	6945	199	52T	-1.14	-1.37	-1.06	3.30	2.24	24.00	-21.76	
	7025	215	52T	-1.14	-1.25	-1.37	3.30	2.16	24.00	-21.84	

Table 7-30. SISO ANT2 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 191 of 630

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					37	52L	52U				
5	6025	15	52T	-1.37	-1.08	-1.22	3.20	2.12	24.00	-21.88	
	6185	47	52T	-1.40	-1.11	-1.23	3.20	2.09	24.00	-21.91	
	6345	79	52T	-1.06	-1.23	-1.71	3.20	2.14	24.00	-21.86	
6	6505	111	52T	-1.17	-1.01	-1.85	2.40	1.39	24.00	-22.61	
7	6665	143	52T	-1.03	-1.03	-1.91	3.30	2.27	24.00	-21.73	
	6825	175	52T	-1.67	-1.31	-1.48	3.30	1.99	24.00	-22.01	
8	6985	207	52T	-1.44	-1.30	-1.74	3.30	2.00	24.00	-22.00	

Table 7-31. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 192 of 630

SISO ANT2 Maximum Conducted Output Power Measurements (106 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					53	54				
5	5935	2	106T	1.13	1.07	3.20	4.33	24.00	-19.67	
	6175	45	106T	1.25	1.42	3.20	4.62	24.00	-19.38	
	6415	93	106T	1.33	1.32	3.20	4.53	24.00	-19.47	
6	6435	97	106T	1.49	1.48	2.40	3.89	24.00	-20.11	
	6475	105	106T	1.43	1.29	2.40	3.83	24.00	-20.17	
	6515	113	106T	1.41	1.33	2.40	3.81	24.00	-20.19	
7	6535	117	106T	1.11	1.48	3.30	4.78	24.00	-19.22	
	6695	149	106T	1.34	1.23	3.30	4.64	24.00	-19.36	
	6875	185	106T	1.35	1.31	3.30	4.65	24.00	-19.35	
8	6895	189	106T	1.46	1.48	3.30	4.78	24.00	-19.22	
	6995	209	106T	1.21	1.41	3.30	4.71	24.00	-19.29	
	7115	233	106T	-1.89	-1.82	3.30	1.48	24.00	-22.52	

Table 7-32. SISO ANT2 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					53	54	56				
5	5965	3	106T	1.47	1.37	1.43	3.20	4.67	24.00	-19.33	
	6165	43	106T	1.18	1.25	1.41	3.20	4.61	24.00	-19.39	
	6405	91	106T	1.49	1.36	1.35	3.20	4.69	24.00	-19.31	
6	6445	99	106T	1.30	1.15	1.48	2.40	3.88	24.00	-20.12	
	6485	107	106T	1.39	1.16	1.14	2.40	3.79	24.00	-20.21	
	6525	115	106T	1.26	1.10	1.10	2.40	3.66	24.00	-20.34	
7	6565	123	106T	1.45	1.49	1.21	3.30	4.79	24.00	-19.21	
	6725	155	106T	1.45	1.48	1.23	3.30	4.78	24.00	-19.22	
	6845	179	106T	1.47	1.49	1.49	3.30	4.79	24.00	-19.21	
8	6885	187	106T	1.35	1.28	1.40	3.30	4.70	24.00	-19.30	
	7005	211	106T	1.29	1.46	1.21	3.30	4.76	24.00	-19.24	
	7085	227	106T	1.35	1.22	1.23	3.30	4.65	24.00	-19.35	

Table 7-33. SISO ANT2 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					53	56	60				
5	5985	7	106T	1.49	1.31	1.08	3.20	4.69	24.00	-19.31	
	6145	39	106T	1.24	1.10	1.40	3.20	4.60	24.00	-19.40	
	6385	87	106T	1.31	1.45	1.18	3.20	4.65	24.00	-19.35	
6	6465	103	106T	1.36	1.46	1.16	2.40	3.86	24.00	-20.14	
7	6545	119	106T	1.18	1.49	1.24	3.30	4.79	24.00	-19.21	
	6705	151	106T	1.43	1.49	1.32	3.30	4.79	24.00	-19.21	
	6865	183	106T	1.13	1.01	1.05	3.30	4.43	24.00	-19.57	
8	6945	199	106T	1.14	1.49	1.40	3.30	4.79	24.00	-19.21	
	7025	215	106T	1.28	1.34	1.40	3.30	4.70	24.00	-19.30	

Table 7-34. SISO ANT2 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 193 of 630

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					53	60L	60U				
5	6025	15	106T	1.17	1.19	1.31	3.20	4.51	24.00	-19.49	
	6185	47	106T	1.05	1.31	1.24	3.20	4.51	24.00	-19.49	
	6345	79	106T	1.49	1.48	0.82	3.20	4.69	24.00	-19.31	
6	6505	111	106T	1.48	1.49	1.16	2.40	3.89	24.00	-20.11	
7	6665	143	106T	1.39	1.49	1.42	3.30	4.79	24.00	-19.21	
	6825	175	106T	1.45	1.47	1.49	3.30	4.79	24.00	-19.21	
8	6985	207	106T	1.32	1.14	1.23	3.30	4.62	24.00	-19.38	

Table 7-35. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 194 of 630

SISO ANT2 Maximum Conducted Output Power Measurements (242 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index				
					61				
5	5935	2	242T	6.69	3.20	9.89	24.00	-14.11	
	6175	45	242T	6.48	3.20	9.68	24.00	-14.32	
	6415	93	242T	6.42	3.20	9.62	24.00	-14.38	
6	6435	97	242T	6.36	2.40	8.76	24.00	-15.24	
	6475	105	242T	6.93	2.40	9.33	24.00	-14.67	
	6515	113	242T	6.49	2.40	8.89	24.00	-15.11	
7	6535	117	242T	6.69	3.30	9.99	24.00	-14.01	
	6695	149	242T	6.41	3.30	9.71	24.00	-14.29	
	6875	185	242T	6.18	3.30	9.48	24.00	-14.52	
8	6895	189	242T	6.17	3.30	9.47	24.00	-14.53	
	6995	209	242T	6.92	3.30	10.22	24.00	-13.78	
	7115	233	242T	3.36	3.30	6.66	24.00	-17.34	

Table 7-36. SISO ANT2 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					61	62				
5	5965	3	242T	6.66	6.76	3.20	9.96	24.00	-14.04	
	6165	43	242T	6.38	6.45	3.20	9.65	24.00	-14.35	
	6405	91	242T	6.53	6.38	3.20	9.73	24.00	-14.27	
6	6445	99	242T	6.83	6.78	2.40	9.23	24.00	-14.77	
	6485	107	242T	6.37	6.13	2.40	8.77	24.00	-15.23	
	6525	115	242T	6.41	6.22	2.40	8.81	24.00	-15.19	
7	6565	123	242T	6.05	5.97	3.30	9.35	24.00	-14.65	
	6725	155	242T	6.22	6.24	3.30	9.54	24.00	-14.46	
	6845	179	242T	6.33	6.19	3.30	9.63	24.00	-14.37	
8	6885	187	242T	6.24	6.18	3.30	9.54	24.00	-14.46	
	7005	211	242T	6.88	6.91	3.30	10.21	24.00	-13.79	
	7085	227	242T	6.96	6.89	3.30	10.26	24.00	-13.74	

Table 7-37. SISO ANT2 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 195 of 630

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					61	62	64				
5	5985	7	242T	6.81	6.81	6.99	3.20	10.19	24.00	-13.81	
	6145	39	242T	6.84	6.77	6.98	3.20	10.18	24.00	-13.82	
	6385	87	242T	6.97	6.90	6.45	3.20	10.17	24.00	-13.83	
6	6465	103	242T	6.81	6.67	6.68	2.40	9.21	24.00	-14.79	
7	6545	119	242T	6.45	6.44	6.69	3.30	9.99	24.00	-14.01	
	6705	151	242T	6.46	6.18	6.40	3.30	9.76	24.00	-14.24	
	6865	183	242T	6.82	6.82	6.67	3.30	10.12	24.00	-13.88	
8	6945	199	242T	5.69	5.62	5.45	3.30	8.99	24.00	-15.01	
	7025	215	242T	5.41	5.47	5.65	3.30	8.95	24.00	-15.05	

Table 7-38. SISO ANT2 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					61	64L	64U				
5	6025	15	242T	6.34	6.89	6.69	3.20	10.09	24.00	-13.91	
	6185	47	242T	6.58	6.87	6.84	3.20	10.07	24.00	-13.93	
	6345	79	242T	6.71	6.97	6.06	3.20	10.17	24.00	-13.83	
6	6505	111	242T	6.67	6.75	6.47	2.40	9.15	24.00	-14.85	
7	6665	143	242T	6.47	6.58	6.46	3.30	9.88	24.00	-14.12	
	6825	175	242T	6.81	6.72	6.21	3.30	10.11	24.00	-13.89	
8	6985	207	242T	6.77	6.89	6.82	3.30	10.19	24.00	-13.81	

Table 7-39. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 196 of 630

SISO ANT2 Maximum Conducted Output Power Measurements (484 Tones)

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					65					
5	5965	3	484T	9.60		3.20	12.80	24.00	-11.20	
	6165	43	484T	9.54		3.20	12.74	24.00	-11.26	
	6405	91	484T	9.72		3.20	12.92	24.00	-11.08	
6	6445	99	484T	9.98		2.40	12.38	24.00	-11.62	
	6485	107	484T	9.75		2.40	12.15	24.00	-11.85	
	6525	115	484T	9.91		2.40	12.31	24.00	-11.69	
7	6565	123	484T	9.97		3.30	13.27	24.00	-10.73	
	6725	155	484T	9.91		3.30	13.21	24.00	-10.79	
	6845	179	484T	9.90		3.30	13.20	24.00	-10.80	
8	6885	187	484T	9.74		3.30	13.04	24.00	-10.96	
	7005	211	484T	9.56		3.30	12.86	24.00	-11.14	
	7085	227	484T	9.63		3.30	12.93	24.00	-11.07	

Table 7-40. SISO ANT2 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					65	66				
5	5985	7	484T	9.63	9.73	3.20	12.93	24.00	-11.07	
	6145	39	484T	9.56	9.66	3.20	12.86	24.00	-11.14	
	6385	87	484T	9.85	9.48	3.20	13.05	24.00	-10.95	
6	6465	103	484T	9.61	9.69	2.40	12.09	24.00	-11.91	
7	6545	119	484T	9.56	9.81	3.30	13.11	24.00	-10.89	
	6705	151	484T	9.25	9.74	3.30	13.04	24.00	-10.96	
	6865	183	484T	9.39	9.84	3.30	13.14	24.00	-10.86	
8	6945	199	484T	9.25	9.68	3.30	12.98	24.00	-11.02	
	7025	215	484T	9.16	9.81	3.30	13.11	24.00	-10.89	

Table 7-41. SISO ANT2 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index						
					65	66L	66U				
5	6025	15	484T	9.27	9.65	9.56	3.20	12.85	24.00	-11.15	
	6185	47	484T	9.14	9.48	9.46	3.20	12.68	24.00	-11.32	
	6345	79	484T	9.58	9.64	9.04	3.20	12.84	24.00	-11.16	
6	6505	111	484T	9.72	9.45	9.31	2.40	12.12	24.00	-11.88	
7	6665	143	484T	9.31	9.29	9.21	3.30	12.61	24.00	-11.39	
	6825	175	484T	9.36	9.18	9.56	3.30	12.86	24.00	-11.14	
8	6985	211	484T	8.87	8.80	9.51	3.30	12.81	24.00	-11.19	

Table 7-42. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 197 of 630

SISO ANT2 Maximum Conducted Output Power Measurements (996 Tones)

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					67					
5	5985	7	996T	12.73		3.20	15.93	24.00	-8.07	
	6145	39	996T	12.73		3.20	15.93	24.00	-8.07	
	6385	87	996T	12.82		3.20	16.02	24.00	-7.98	
6	6465	103	996T	12.53		2.40	14.93	24.00	-9.07	
7	6545	119	996T	12.53		3.30	15.83	24.00	-8.17	
	6705	151	996T	12.35		3.30	15.65	24.00	-8.35	
	6865	183	996T	12.59		3.30	15.89	24.00	-8.11	
8	6945	199	996T	12.48		3.30	15.78	24.00	-8.22	
	7025	215	996T	12.47		3.30	15.77	24.00	-8.23	

Table 7-43. SISO ANT2 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index					
					67(L)	67U				
5	6025	15	996T	12.47	12.64	3.20	15.84	24.00	-8.16	
	6185	47	996T	12.48	12.52	3.20	15.72	24.00	-8.28	
	6345	79	996T	12.86	12.39	3.20	16.06	24.00	-7.94	
6	6505	111	996T	12.73	12.59	2.40	15.13	24.00	-8.87	
7	6665	143	996T	12.43	12.56	3.30	15.86	24.00	-8.14	
	6825	175	996T	12.42	12.80	3.30	16.10	24.00	-7.90	
8	6985	207	996T	12.11	12.74	3.30	16.04	24.00	-7.96	

Table 7-44. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 198 of 630



SISO ANT2 Maximum Conducted Output Power Measurements (2x996 Tones)

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index				
					68				
5	6025	15	2x996T	12.84	3.20	16.04	24.00	-7.96	
	6185	47	2x996T	12.69	3.20	15.89	24.00	-8.11	
	6345	79	2x996T	12.78	3.20	15.98	24.00	-8.02	
6	6505	111	2x996T	12.49	2.40	14.89	24.00	-9.11	
7	6665	143	2x996T	12.50	3.30	15.80	24.00	-8.20	
	6825	175	2x996T	12.48	3.30	15.78	24.00	-8.22	
8	6985	207	2x996T	12.21	3.30	15.51	24.00	-8.49	

Table 7-45. SISO ANT2 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 199 of 630

MIMO Maximum Conducted Output Power Measurements (26 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 0			RU Index: 4			RU Index: 8						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5935	2	26T	-8.11	-8.66	-5.37	-8.57	-8.97	-5.76	-8.15	-8.48	-5.30	6.36	1.06	24.00	-22.94	
	6175	45	26T	-8.21	-8.63	-5.40	-8.56	-9.15	-5.83	-8.03	-8.69	-5.34	6.36	1.02	24.00	-22.98	
	6415	93	26T	-7.90	-8.36	-5.11	-8.29	-8.91	-5.58	-7.74	-8.47	-5.08	6.36	1.28	24.00	-22.72	
6	6435	97	26T	-7.71	-8.84	-5.23	-8.22	-9.31	-5.72	-7.72	-8.86	-5.24	5.92	0.69	24.00	-23.31	
	6475	105	26T	-7.73	-8.34	-5.01	-8.15	-8.94	-5.52	-7.67	-8.61	-5.10	5.92	0.91	24.00	-23.09	
	6515	113	26T	-7.71	-8.89	-5.25	-8.20	-9.37	-5.74	-7.73	-9.01	-5.31	5.92	0.67	24.00	-23.33	
7	6535	117	26T	-7.67	-8.51	-5.06	-8.17	-9.05	-5.58	-7.69	-8.67	-5.14	6.36	1.30	24.00	-22.70	
	6695	149	26T	-7.97	-8.52	-5.23	-8.01	-8.55	-5.26	-8.02	-8.73	-5.35	6.36	1.13	24.00	-22.87	
	6875	185	26T	-8.49	-9.26	-5.85	-8.41	-9.43	-5.88	-8.31	-9.59	-5.89	6.36	0.51	24.00	-23.49	
8	6895	189	26T	-7.83	-8.78	-5.27	-8.29	-9.33	-5.77	-7.86	-8.91	-5.34	6.41	1.14	24.00	-22.86	
	6995	209	26T	-7.56	-9.04	-5.23	-7.76	-9.01	-5.33	-7.61	-9.11	-5.29	6.41	1.18	24.00	-22.82	
	7115	233	26T	-7.49	-9.29	-5.29	-7.92	-9.24	-5.52	-7.67	-9.33	-5.41	6.41	1.12	24.00	-22.88	

Table 7-46. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 0			RU Index: 8			RU Index: 17						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5965	3	26T	-9.21	-9.71	-6.44	-9.44	-9.91	-6.66	-9.08	-9.75	-6.39	6.36	-0.03	24.00	-24.03	
	6165	43	26T	-9.22	-9.84	-6.51	-9.42	-9.68	-6.54	-9.02	-9.73	-6.35	6.36	0.01	24.00	-23.99	
	6405	91	26T	-8.79	-9.28	-6.02	-9.08	-9.45	-6.25	-8.78	-9.63	-6.17	6.36	0.34	24.00	-23.66	
6	6445	99	26T	-8.69	-9.11	-5.88	-8.93	-9.28	-6.09	-8.67	-9.43	-6.02	5.92	0.04	24.00	-23.96	
	6485	107	26T	-8.76	-9.42	-6.07	-9.04	-9.78	-6.38	-8.73	-9.91	-6.27	5.92	-0.15	24.00	-24.15	
	6525	115	26T	-8.67	-9.44	-6.03	-8.84	-9.53	-6.16	-8.73	-9.72	-6.19	5.92	-0.11	24.00	-24.11	
7	6565	123	26T	-8.81	-9.77	-6.25	-9.02	-10.16	-6.54	-8.96	-10.11	-6.49	6.36	0.11	24.00	-23.89	
	6725	155	26T	-8.72	-9.67	-6.16	-8.96	-9.98	-6.43	-8.79	-9.79	-6.25	6.36	0.20	24.00	-23.80	
	6845	179	26T	-8.88	-9.73	-6.27	-9.16	-9.93	-6.52	-8.96	-9.92	-6.40	6.36	0.09	24.00	-23.91	
8	6885	187	26T	-8.75	-9.76	-6.22	-9.06	-10.01	-6.50	-8.93	-9.98	-6.41	6.41	0.19	24.00	-23.81	
	7005	211	26T	-8.58	-10.13	-6.28	-8.93	-10.24	-6.53	-8.81	-10.13	-6.41	6.41	0.13	24.00	-23.87	
	7085	227	26T	-8.16	-10.12	-6.02	-8.65	-10.47	-6.46	-8.47	-10.38	-6.31	6.41	0.39	24.00	-23.61	

Table 7-47. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 0			RU Index: 18			RU Index: 36						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5985	7	26T	-9.18	-9.61	-6.38	-9.20	-9.81	-6.48	-9.02	-9.51	-6.25	6.36	0.11	24.00	-23.89	
	6145	39	26T	-9.33	-9.89	-6.59	-9.25	-9.79	-6.50	-9.03	-9.65	-6.32	6.36	0.04	24.00	-23.96	
	6385	87	26T	-8.75	-9.38	-6.04	-8.73	-9.63	-6.15	-8.53	-10.14	-6.25	6.36	0.32	24.00	-23.68	
6	6465	103	26T	-8.69	-9.03	-5.85	-8.81	-9.34	-6.06	-8.69	-9.82	-6.21	5.92	0.07	24.00	-23.93	
	6545	119	26T	-8.76	-9.30	-6.01	-8.87	-9.67	-6.24	-8.94	-10.02	-6.44	6.36	0.35	24.00	-23.65	
	6705	151	26T	-8.48	-9.14	-5.79	-8.65	-9.72	-6.14	-8.76	-9.81	-6.24	6.36	0.57	24.00	-23.43	
7	6865	183	26T	-8.78	-9.69	-6.20	-8.98	-9.78	-6.35	-9.21	-10.07	-6.61	6.36	0.16	24.00	-23.84	
	6945	199	26T	-8.42	-9.66	-5.99	-8.75	-9.91	-6.28	-9.02	-10.26	-6.59	6.41	0.42	24.00	-23.58	
	7025	215	26T	-8.51	-10.06	-6.21	-8.87	-10.18	-6.47	-9.19	-10.33	-6.71	6.41	0.20	24.00	-23.80	

Table 7-48. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 0			RU Index: 36L			RU Index: 36U						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6025	15	26T	-9.37	-10.28	-6.79	-9.04	-9.69	-6.34	-9.22	-9.89	-6.53	6.36	0.02	24.00	-23.98	
	6185	47	26T	-9.48	-10.21	-6.82	-9	-9.66	-6.31	-9.01	-9.98	-6.46	6.36	0.05	24.00	-23.95	
	6345	79	26T	-9.17	-9.51	-6.33	-8.67	-9.43	-6.02	-8.86	-10.69	-6.67	6.36	0.34	24.00	-23.66	
6	6505	111	26T	-9.14	-9.36	-6.24	-9.04	-9.72	-6.36	-9.25	-10.46	-6.80	5.92	-0.32	24.00	-24.32	
	6665	143	26T	-9.08	-9.67	-6.35	-8.63	-9.71	-6.13	-9.04	-10.38	-6.65	6.36	0.23	24.00	-23.77	
7	6825	175	26T	-9.19	-9.47	-6.32	-8.82	-9.77	-6.26	-9.25	-10.18	-6.68	6.36	0.10	24.00	-23.90	
	6985	207	26T	-8.49	-10.36	-6.31	-8.51	-10.11	-6.23	-9.14	-10.49	-6.75	6.41	0.18	24.00	-23.82	

Table 7-49. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 200 of 630

MIMO Maximum Conducted Output Power Measurements (52 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
				RU Index: 37			RU Index: 39			RU Index: 40							
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
20MHz BW	5	5935	2	52T	-5.21	-5.88	-2.52	-5.41	-5.97	-2.67	-5.17	-5.70	-2.42	6.36	3.94	24.00	-20.06
		6175	45	52T	-5.23	-5.78	-2.49	-5.40	-6.04	-2.70	-5.14	-5.85	-2.47	6.36	3.89	24.00	-20.11
		6415	93	52T	-4.84	-5.42	-2.11	-5.09	-5.73	-2.39	-4.89	-5.64	-2.24	6.36	4.25	24.00	-19.75
	6	6435	97	52T	-4.77	-5.96	-2.31	-4.56	-5.77	-2.11	-4.85	-6.06	-2.40	5.92	3.81	24.00	-20.19
		6475	105	52T	-4.74	-5.41	-2.05	-4.97	-5.90	-2.40	-4.74	-5.67	-2.17	5.92	3.87	24.00	-20.13
		6515	113	52T	-4.81	-6.00	-2.35	-5.06	-6.38	-2.66	-4.80	-6.13	-2.40	5.92	3.57	24.00	-20.43
	7	6535	117	52T	-4.77	-5.48	-2.10	-5.02	-5.85	-2.40	-4.76	-5.60	-2.15	6.36	4.26	24.00	-19.74
		6695	149	0.82	-5.17	-5.56	-2.35	-4.92	-5.51	-2.19	-4.73	-5.37	-2.03	6.36	4.33	24.00	-19.67
		6875	185	52T	-4.85	-6.15	-2.44	-5.28	-6.34	-2.77	-5.05	-6.19	-2.57	6.36	3.92	24.00	-20.08
8	6895	189	52T	-4.81	-6.06	-2.38	-5.07	-6.32	-2.64	-4.88	-6.12	-2.45	6.41	4.03	24.00	-19.97	
	6995	209	52T	-4.57	-6.61	-2.46	-4.92	-6.89	-2.78	-4.69	-6.69	-2.57	6.41	3.95	24.00	-20.05	
	7115	233	52T	-5.61	-7.52	-3.45	-5.94	-7.75	-3.74	-5.72	-7.55	-3.53	6.41	2.96	24.00	-21.04	

Table 7-50. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
				RU Index: 37			RU Index: 40			RU Index: 44							
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
40MHz BW	5	5965	3	52T	-5.15	-5.78	-2.44	-5.28	-6.03	-2.63	-5.04	-5.81	-2.40	6.36	3.96	24.00	-20.04
		6165	43	52T	-5.25	-5.87	-2.54	-5.32	-5.85	-2.57	-5.06	-5.62	-2.32	6.36	4.04	24.00	-19.96
		6405	91	52T	-4.89	-5.22	-2.04	-5.03	-5.55	-2.27	-4.81	-5.46	-2.11	6.36	4.32	24.00	-19.68
	6	6445	99	52T	-5.21	-5.59	-2.39	-5.39	-5.81	-2.58	-5.21	-5.89	-2.53	5.92	3.53	24.00	-20.47
		6485	107	52T	-5.24	-5.93	-2.56	-5.41	-6.25	-2.80	-5.25	-6.24	-2.71	5.92	3.36	24.00	-20.64
		6525	115	52T	-5.12	-5.81	-2.44	-5.29	-6.16	-2.69	-5.16	-6.13	-2.61	5.92	3.48	24.00	-20.52
	7	6565	123	52T	-5.25	-6.21	-2.69	-5.45	-6.46	-2.92	-5.35	-6.54	-2.89	6.36	3.67	24.00	-20.33
		6725	155	52T	-5.19	-6.26	-2.68	-5.35	-6.56	-2.90	-5.33	-6.32	-2.79	6.36	3.68	24.00	-20.32
		6845	179	52T	-5.25	-6.26	-2.72	-5.48	-6.37	-2.89	-5.42	-6.28	-2.82	6.36	3.64	24.00	-20.36
8	6885	187	52T	-5.22	-6.23	-2.69	-5.41	-6.63	-2.97	-5.38	-6.34	-2.82	6.41	3.72	24.00	-20.28	
	7005	211	52T	-4.99	-6.57	-2.70	-5.28	-6.72	-2.93	-5.29	-6.57	-2.87	6.41	3.71	24.00	-20.29	
	7085	227	52T	-4.71	-6.57	-2.53	-5.00	-6.90	-2.84	-5.01	-6.78	-2.80	6.41	3.88	24.00	-20.12	

Table 7-51. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
				RU Index: 37			RU Index: 44			RU Index: 52							
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
80MHz BW	5	5985	7	52T	-5.24	-5.83	-2.51	-5.22	-6.04	-2.60	-5.54	-6.04	-2.77	6.36	3.85	24.00	-20.15
		6145	39	52T	-5.44	-5.92	-2.66	-5.37	-5.93	-2.63	-5.56	-6.16	-2.84	6.36	3.73	24.00	-20.27
		6385	87	52T	-4.97	-5.48	-2.21	-4.94	-5.88	-2.37	-5.08	-6.51	-2.73	6.36	4.15	24.00	-19.85
	6	6465	103	52T	-5.27	-5.59	-2.42	-5.37	-5.93	-2.63	-5.28	-6.25	-2.73	5.92	3.50	24.00	-20.50
		6545	119	52T	-5.21	-5.83	-2.50	-5.36	-6.22	-2.76	-5.42	-6.46	-2.90	6.36	3.86	24.00	-20.14
		6705	151	52T	-5.11	-5.54	-2.31	-5.27	-6.15	-2.68	-5.33	-6.12	-2.70	6.36	4.05	24.00	-19.95
	7	6865	183	52T	-5.27	-6.11	-2.66	-5.56	-6.27	-2.89	-5.71	-6.42	-3.04	6.36	3.70	24.00	-20.30
		6945	199	52T	-4.94	-6.14	-2.49	-5.30	-6.40	-2.80	-5.51	-6.62	-3.02	6.41	3.92	24.00	-20.08
		7025	215	52T	-5.16	-6.52	-2.78	-5.42	-6.57	-2.95	-5.66	-6.83	-3.20	6.41	3.63	24.00	-20.37

Table 7-52. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
				RU Index: 37			RU Index: 52L			RU Index: 52U							
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
160MHz BW	5	6025	15	52T	-5.35	-6.41	-2.84	-5.07	-5.84	-2.43	-5.22	-5.83	-2.50	6.36	3.93	24.00	-20.07
		6185	47	52T	-5.91	-6.61	-3.24	-5.03	-5.79	-2.38	-5.04	-5.87	-2.42	6.36	3.98	24.00	-20.02
		6345	79	52T	-5.72	-6.06	-2.88	-4.81	-5.66	-2.20	-4.96	-6.64	-2.71	6.36	4.16	24.00	-19.84
	6	6505	111	52T	-5.08	-5.22	-2.14	-4.98	-5.77	-2.35	-5.16	-6.27	-2.67	5.92	3.78	24.00	-20.22
		6665	143	52T	-5.06	-5.59	-2.31	-4.59	-5.92	-2.19	-5.51	-6.84	-3.11	6.36	4.17	24.00	-19.83
		6825	175	52T	-5.25	-5.58	-2.40	-4.79	-5.76	-2.24	-5.72	-6.57	-3.11	6.36	4.12	24.00	-19.88
	8	6985	207	52T	-4.56	-6.87	-2.55	-4.52	-6.61	-2.43	-5.62	-7.37	-3.40	6.41	3.98	24.00	-20.02

Table 7-53. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 201 of 630

MIMO Maximum Conducted Output Power Measurements (106 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 53			RU Index: 54						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5935	2	106T	-2.24	-1.89	0.95	-2.21	-1.80	1.01	6.36	7.37	24.00	-16.63	
	6175	45	106T	-2.21	-1.97	0.92	-2.01	-1.87	1.07	6.36	7.43	24.00	-16.57	
	6415	93	106T	-2.17	-1.67	1.10	-1.92	-1.69	1.21	6.36	7.57	24.00	-16.43	
6	6435	97	106T	-2.18	-2.22	0.81	-1.96	-2.23	0.92	5.92	6.84	24.00	-17.16	
	6475	105	106T	-2.09	-1.78	1.08	-2.11	-1.91	1.00	5.92	7.00	24.00	-17.00	
	6515	113	106T	-2.18	-2.15	0.85	-2.19	-2.27	0.78	5.92	6.77	24.00	-17.23	
7	6535	117	106T	-2.12	-1.70	1.11	-2.16	-1.79	1.04	6.36	7.47	24.00	-16.53	
	6695	149	106T	-2.01	-1.10	1.48	-2.01	-1.26	1.39	6.36	7.84	24.00	-16.16	
	6875	185	106T	-2.58	-2.03	0.71	-2.65	-2.11	0.64	6.36	7.07	24.00	-16.93	
8	6895	189	106T	-2.41	-2.00	0.81	-2.49	-1.94	0.80	6.41	7.22	24.00	-16.78	
	6995	209	106T	-1.16	-3.09	0.99	-1.26	-3.09	0.93	6.41	7.40	24.00	-16.60	
	7115	233	106T	-4.76	-5.30	-2.01	-4.88	-5.23	-2.04	6.41	4.40	24.00	-19.60	

Table 7-54. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 53			RU Index: 54			RU Index: 56						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5965	3	106T	-2.07	-1.92	1.02	-2.25	-2.15	0.81	-1.98	-1.92	1.06	6.36	7.42	24.00	-16.58	
	6165	43	106T	-2.09	-1.97	0.98	-2.29	-2.00	0.87	-2.00	-1.75	1.14	6.36	7.50	24.00	-16.50	
	6405	91	106T	-2.03	-1.37	1.32	-2.22	-1.53	1.15	-1.93	-1.52	1.29	6.36	7.68	24.00	-16.32	
6	6445	99	106T	-1.90	-1.38	1.38	-2.08	-1.49	1.24	-1.88	-1.53	1.31	5.92	7.30	24.00	-16.70	
	6485	107	106T	-1.90	-1.33	1.40	-2.14	-1.87	1.01	-1.95	-1.91	1.08	5.92	7.32	24.00	-16.68	
	6525	115	106T	-1.92	-1.66	1.22	-2.04	-1.56	1.22	-1.96	-1.64	1.21	5.92	7.14	24.00	-16.86	
7	6565	123	106T	-1.89	-1.37	1.39	-2.23	-1.94	0.93	-2.18	-2.07	0.89	6.36	7.75	24.00	-16.25	
	6725	155	106T	-2.11	-1.63	1.15	-2.70	-1.73	0.82	-2.22	-1.64	1.09	6.36	7.51	24.00	-16.49	
	6845	179	106T	-2.22	-1.65	1.08	-2.40	-1.70	0.97	-2.52	-1.74	0.90	6.36	7.44	24.00	-16.56	
8	6885	187	106T	-2.31	-1.70	1.02	-2.38	-1.83	0.91	-2.38	-1.81	0.92	6.41	7.43	24.00	-16.57	
	7005	211	106T	-1.12	-3.02	1.04	-1.59	-3.08	0.74	-1.64	-2.95	0.76	6.41	7.45	24.00	-16.55	
	7085	227	106T	-1.89	-2.28	0.93	-2.16	-2.45	0.71	-2.15	-2.45	0.71	6.41	7.34	24.00	-16.66	

Table 7-55. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 53			RU Index: 56			RU Index: 60						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5985	7	106T	-2.17	-1.98	0.94	-2.19	-2.04	0.90	-1.98	-1.78	1.13	6.36	7.49	24.00	-16.51	
	6145	39	106T	-2.26	-1.98	0.89	-2.17	-1.93	0.96	-2.06	-1.67	1.15	6.36	7.51	24.00	-16.49	
	6385	87	106T	-2.12	-1.53	1.20	-1.97	-1.82	1.12	-1.93	-2.15	0.97	6.36	7.56	24.00	-16.44	
6	6465	103	106T	-1.99	-1.31	1.37	-1.95	-1.66	1.21	-2.07	-1.94	1.01	5.92	7.29	24.00	-16.71	
	6545	119	106T	-2.00	-1.24	1.41	-2.04	-1.71	1.14	-2.29	-1.95	0.89	6.36	7.77	24.00	-16.23	
	6705	151	106T	-2.39	-1.68	0.99	-2.61	-2.10	0.66	-2.66	-2.18	0.60	6.36	7.35	24.00	-16.65	
7	6865	183	106T	-2.27	-1.58	1.10	-2.56	-1.79	0.85	-2.78	-1.93	0.68	6.36	7.46	24.00	-16.54	
	6945	199	106T	-1.93	-1.71	1.19	-2.24	-1.96	0.91	-2.46	-2.21	0.68	6.41	7.60	24.00	-16.40	
	7025	215	106T	-1.01	-2.98	1.13	-1.40	-1.71	1.46	-1.69	-1.53	1.40	6.41	7.87	24.00	-16.13	

Table 7-56. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 53			RU Index: 60L			RU Index: 60U						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6025	15	106T	-2.20	-2.39	0.72	-1.64	-1.51	1.44	-1.62	-1.51	1.45	6.36	7.81	24.00	-16.19	
	6185	47	106T	-2.31	-2.17	0.77	-1.65	-1.41	1.48	-1.6	-1.52	1.45	6.36	7.84	24.00	-16.16	
	6345	79	106T	-2.33	-1.47	1.13	-2.1	-1.65	1.14	-1.62	-2.19	1.11	6.36	7.50	24.00	-16.50	
6	6505	111	106T	-2.37	-1.43	1.14	-1.96	-1.32	1.38	-2	-1.9	1.06	5.92	7.30	24.00	-16.70	
	6665	143	106T	-2.37	-1.74	0.97	-2.07	-1.69	1.13	-2.35	-2.32	0.68	6.36	7.49	24.00	-16.51	
	6825	175	106T	-2.31	-1.41	1.17	-2.29	-1.75	1.00	-2.73	-1.98	0.67	6.36	7.53	24.00	-16.47	
8	6985	207	106T	-1.66	-3.24	0.63	-1.53	-3.19	0.73	-2.53	-1.94	0.79	6.41	7.20	24.00	-16.80	

Table 7-57. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 202 of 630

MIMO Maximum Conducted Output Power Measurements (242 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 61						
					ANT1	ANT2	MIMO				
5	5935	2	242T	0.50	0.88	3.70	6.36	10.06	24.00	-13.94	
	6175	45	242T	0.29	0.77	3.55	6.36	9.91	24.00	-14.09	
	6415	93	242T	0.03	0.62	3.35	6.36	9.71	24.00	-14.29	
6	6435	97	242T	0.68	0.43	3.57	5.92	9.49	24.00	-14.51	
	6475	105	242T	0.81	0.83	3.83	5.92	9.75	24.00	-14.25	
	6515	113	242T	0.71	0.61	3.67	5.92	9.59	24.00	-14.41	
7	6535	117	242T	0.77	1.12	3.96	6.36	10.32	24.00	-13.68	
	6695	149	242T	0.41	1.01	3.73	6.36	10.09	24.00	-13.91	
	6875	185	242T	0.90	0.52	3.72	6.36	10.08	24.00	-13.92	
8	6895	189	242T	0.26	0.55	3.42	6.41	9.83	24.00	-14.17	
	6995	209	242T	0.71	0.84	3.79	6.41	10.20	24.00	-13.80	
	7115	233	242T	0.98	0.62	3.81	6.41	10.22	24.00	-13.78	

Table 7-58. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

40MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 61			RU Index: 62						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5965	3	242T	0.46	0.52	3.50	0.52	0.37	3.46	6.36	9.86	24.00	-14.14	
	6165	43	242T	0.23	0.64	3.45	0.31	0.81	3.58	6.36	9.94	24.00	-14.06	
	6405	91	242T	0.39	1.23	3.84	0.52	1.15	3.86	6.36	10.22	24.00	-13.78	
6	6445	99	242T	0.27	0.83	3.57	0.29	0.64	3.48	5.92	9.49	24.00	-14.51	
	6485	107	242T	0.24	0.36	3.31	0.75	0.73	3.75	5.92	9.67	24.00	-14.33	
	6525	115	242T	0.30	0.91	3.63	0.27	0.69	3.50	5.92	9.55	24.00	-14.45	
7	6565	123	242T	0.65	0.87	3.77	0.57	0.61	3.60	6.36	10.13	24.00	-13.87	
	6725	155	242T	0.85	0.74	3.81	0.82	0.53	3.69	6.36	10.17	24.00	-13.83	
	6845	179	242T	0.74	0.98	3.87	0.62	0.88	3.76	6.36	10.23	24.00	-13.77	
8	6885	187	242T	0.40	0.59	3.51	0.19	0.48	3.35	6.41	9.92	24.00	-14.08	
	7005	211	242T	0.64	0.78	3.72	0.75	0.65	3.71	6.41	10.13	24.00	-13.87	
	7085	227	242T	0.79	0.11	3.47	0.59	0.64	3.63	6.41	10.04	24.00	-13.96	

Table 7-59. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 61			RU Index: 62			RU Index: 64						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5985	7	242T	0.61	0.72	3.68	0.42	0.59	3.52	0.61	0.81	3.72	6.36	10.08	24.00	-13.92	
	6145	39	242T	0.24	0.56	3.41	0.15	0.49	3.33	0.31	0.89	3.62	6.36	9.98	24.00	-14.02	
	6385	87	242T	0.59	0.93	3.77	0.48	0.74	3.62	0.68	0.70	3.70	6.36	10.13	24.00	-13.87	
6	6465	103	242T	0.36	0.81	3.60	0.22	0.61	3.43	0.27	0.27	3.28	5.92	9.52	24.00	-14.48	
	6545	119	242T	0.41	0.86	3.65	0.18	0.66	3.44	0.09	0.25	3.18	6.36	10.01	24.00	-13.99	
	6705	151	242T	0.44	0.79	3.63	0.34	0.59	3.48	0.39	0.23	3.32	6.36	9.99	24.00	-14.01	
8	6865	183	242T	0.29	0.65	3.48	0.11	0.49	3.31	-0.08	0.54	3.25	6.36	9.84	24.00	-14.16	
	6945	199	242T	0.53	0.65	3.60	0.33	0.59	3.47	0.07	0.35	3.22	6.41	10.01	24.00	-13.99	
	7025	215	242T	0.53	0.44	3.50	0.81	0.69	3.76	0.49	0.63	3.57	6.41	10.17	24.00	-13.83	

Table 7-60. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 61			RU Index: 64L			RU Index: 64U						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6025	15	242T	0.75	0.61	3.69	0.63	0.64	3.65	0.52	0.81	3.68	6.36	10.05	24.00	-13.95	
	6185	47	242T	0.66	0.77	3.73	0.45	0.76	3.62	0.42	0.75	3.60	6.36	10.09	24.00	-13.91	
	6345	79	242T	0.2	1.57	3.95	0.58	0.92	3.76	0.57	0.41	3.50	6.36	10.31	24.00	-13.69	
6	6505	111	242T	0.17	1.14	3.69	0.52	0.92	3.73	0.38	0.54	3.47	5.92	9.65	24.00	-14.35	
	6665	143	242T	0.21	0.76	3.50	0.42	0.32	3.38	0.82	0.33	3.59	6.36	9.95	24.00	-14.05	
	6825	175	242T	0.41	0.64	3.54	0.51	0.6	3.57	0.19	0.63	3.43	6.36	9.93	24.00	-14.07	
8	6985	207	242T	0.89	0.33	3.63	0.51	0.57	3.55	0.49	0.69	3.60	6.41	10.04	24.00	-13.96	

Table 7-61. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 203 of 630

MIMO Maximum Conducted Output Power Measurements (484 Tones)

40MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 65						
					ANT1	ANT2	MIMO				
5	5965	3	484T	3.31	3.28	6.31	6.36	12.67	24.00	-11.33	
	6165	43	484T	2.79	3.26	6.04	6.36	12.40	24.00	-11.60	
	6405	91	484T	2.64	3.66	6.19	6.36	12.55	24.00	-11.45	
6	6445	99	484T	2.72	3.50	6.14	5.92	12.06	24.00	-11.94	
	6485	107	484T	3.16	3.60	6.40	5.92	12.32	24.00	-11.68	
	6525	115	484T	2.66	3.85	6.31	5.92	12.23	24.00	-11.77	
7	6565	123	484T	2.44	3.38	5.95	6.36	12.31	24.00	-11.69	
	6725	155	484T	2.66	3.17	5.93	6.36	12.29	24.00	-11.71	
	6845	179	484T	3.14	3.39	6.28	6.36	12.64	24.00	-11.36	
8	6885	187	484T	3.13	3.49	6.32	6.41	12.73	24.00	-11.27	
	7005	211	484T	2.87	3.23	6.06	6.41	12.47	24.00	-11.53	
	7085	227	484T	3.34	3.03	6.20	6.41	12.61	24.00	-11.39	

Table 7-62. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 65			RU Index: 66						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5985	7	484T	3.21	3.20	6.22	3.36	3.24	6.31	6.36	12.67	24.00	-11.33	
	6145	39	484T	2.57	3.13	5.87	2.69	3.30	6.02	6.36	12.38	24.00	-11.62	
	6385	87	484T	2.64	3.36	6.03	2.79	3.13	5.97	6.36	12.39	24.00	-11.61	
6	6465	103	484T	2.64	3.41	6.05	2.59	2.99	5.80	5.92	11.97	24.00	-12.03	
	6545	119	484T	2.55	3.81	6.24	2.36	3.37	5.90	6.36	12.60	24.00	-11.40	
7	6705	151	484T	2.71	3.48	6.12	2.55	3.23	5.91	6.36	12.48	24.00	-11.52	
	6865	183	484T	3.21	3.45	6.34	2.84	3.48	6.18	6.36	12.70	24.00	-11.30	
8	6945	199	484T	3.23	3.36	6.31	2.78	3.25	6.03	6.41	12.72	24.00	-11.28	
	7025	215	484T	2.87	3.24	6.07	2.38	3.23	5.84	6.41	12.48	24.00	-11.52	

Table 7-63. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 65			RU Index: 66L			RU Index: 66U						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6025	15	484T	3.10	3.00	6.06	3.46	3.37	6.43	3.57	3.31	6.45	6.36	12.81	24.00	-11.19	
	6185	47	484T	2.9	3.35	6.14	2.79	3.14	5.98	2.99	3.09	6.05	6.36	12.50	24.00	-11.50	
	6345	79	484T	2.62	4.03	6.39	2.57	3.41	6.02	3.25	3.32	6.30	6.36	12.75	24.00	-11.25	
6	6505	111	484T	2.6	3.96	6.34	2.79	3.83	6.35	2.29	3.16	5.76	5.92	12.27	24.00	-11.73	
	6665	143	484T	3.14	3.34	6.25	3.28	3.17	6.24	3.05	3.12	6.10	6.36	12.61	24.00	-11.39	
7	6825	175	484T	3.38	3.25	6.33	3.36	3.27	6.33	3.21	3.68	6.46	6.36	12.82	24.00	-11.18	
	6985	211	484T	3	3	6.01	3.3	3.06	6.19	2.27	3.39	5.88	6.41	12.60	24.00	-11.40	

Table 7-64. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 204 of 630

MIMO Maximum Conducted Output Power Measurements (996 Tones)

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 67						
					ANT1	ANT2	MIMO				
5	5985	7	996T	5.62	6.41	9.04	6.36	15.40	24.00	-8.60	
	6145	39	996T	6.02	6.45	9.25	6.36	15.61	24.00	-8.39	
	6385	87	996T	6.23	6.09	9.17	6.36	15.53	24.00	-8.47	
6	6465	103	996T	6.23	6.43	9.34	5.92	15.26	24.00	-8.74	
7	6545	119	996T	5.95	6.31	9.14	6.36	15.50	24.00	-8.50	
	6705	151	996T	5.92	6.58	9.27	6.36	15.63	24.00	-8.37	
	6865	183	996T	5.55	6.66	9.15	6.36	15.51	24.00	-8.49	
8	6945	199	996T	5.96	6.03	9.01	6.41	15.42	24.00	-8.58	
	7025	215	996T	5.34	5.94	8.66	6.41	15.07	24.00	-8.93	

Table 7-65. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 67L			RU Index: 67U						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6025	15	996T	5.53	6.26	8.92	5.85	6.37	9.13	6.36	15.49	24.00	-8.51	
	6185	47	996T	5.88	6.29	9.10	6.24	6.43	9.35	6.36	15.71	24.00	-8.29	
	6345	79	996T	5.73	6.4	9.09	6.14	5.91	9.04	6.36	15.45	24.00	-8.55	
6	6505	111	996T	6.05	6.71	9.40	5.84	6.33	9.10	5.92	15.32	24.00	-8.68	
7	6665	143	996T	5.68	6.46	9.10	5.38	6.02	8.72	6.36	15.46	24.00	-8.54	
	6825	175	996T	6.02	6.45	9.25	5.44	6.49	9.01	6.36	15.61	24.00	-8.39	
8	6985	207	996T	6.07	5.69	8.89	5.16	5.82	8.51	6.41	15.30	24.00	-8.70	

Table 7-66. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 205 of 630



MIMO Maximum Conducted Output Power Measurements (2x996 Tones)

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					RU Index: 68						
					ANT1	ANT2	MIMO				
5	6025	15	2x996T	8.49	8.62	11.57	6.36	17.93	24.00	-6.07	
	6185	47	2x996T	8.38	8.63	11.52	6.36	17.88	24.00	-6.12	
	6345	79	2x996T	8.37	8.69	11.54	6.36	17.90	24.00	-6.10	
6	6505	111	2x996T	8.22	8.42	11.33	5.92	17.25	24.00	-6.75	
7	6665	143	2x996T	8.10	8.35	11.24	6.36	17.60	24.00	-6.40	
	6825	175	2x996T	8.17	8.30	11.25	6.36	17.61	24.00	-6.39	
8	6985	207	2x996T	8.20	8.37	11.30	6.41	17.71	24.00	-6.29	

Table 7-67. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 206 of 630



Sample MIMO Calculation:

At 5935MHz in 802.11ax (20MHz BW – 26 Tones) mode, the average conducted output power was measured to be 0.96 dBm for Antenna-1 and 1.01 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(0.96 \text{ dBm} + 1.01 \text{ dBm}) = (1.247 \text{ mW} + 1.262 \text{ mW}) = 2.509 \text{ mW} = 4.00 \text{ dBm}$$

Sample Directional Gain Calculation:

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log\left[\frac{10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20}}{N_{\text{ANT}}}\right]^2 \text{ dBi}$$

Sample e.i.r.p. Calculation:

At 5955MHz in 802.11ax (20MHz BW – 26 Tones) mode, the average MIMO conducted power was calculated to be 4.00 dBm with directional gain of -0.61 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$4.00 \text{ dBm} + -0.61 \text{ dBi} = -3.39 \text{ dBm}$$

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 207 of 630

7.4 Maximum Power Spectral Density – 802.11ax §15.407(a)(8)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 208 of 630



SISO Ant1 Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-1 Gain [dBi]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	ax (20MHz)	-6.22	3.50	-2.72	-1	-1.72
	6175	45	ax (20MHz)	-6.81	3.50	-3.31	-1	-2.31
	6415	93	ax (20MHz)	-6.72	3.50	-3.22	-1	-2.22
	5695	3	ax (40MHz)	-5.09	3.50	-1.59	-1	-0.59
	6165	43	ax (40MHz)	-5.49	3.50	-1.99	-1	-0.99
	6405	91	ax (40MHz)	-5.64	3.50	-2.14	-1	-1.14
	5985	7	ax (80MHz)	-5.54	3.50	-2.04	-1	-1.04
	6145	39	ax (80MHz)	-5.77	3.50	-2.27	-1	-1.27
	6385	87	ax (80MHz)	-5.86	3.50	-2.36	-1	-1.36
	6025	15	ax (160MHz)	-5.95	3.50	-2.45	-1	-1.45
	6185	47	ax (160MHz)	-5.63	3.50	-2.13	-1	-1.13
Band 6	6345	79	ax (160MHz)	-5.81	3.50	-2.31	-1	-1.31
	6345	97	ax (20MHz)	-4.89	3.40	-1.49	-1	-0.49
	6475	105	ax (20MHz)	-6.16	3.40	-2.76	-1	-1.76
	6515	113	ax (20MHz)	-6.11	3.40	-2.71	-1	-1.71
	6445	99	ax (40MHz)	-4.91	3.40	-1.51	-1	-0.51
	6485	107	ax (40MHz)	-5.20	3.40	-1.80	-1	-0.80
	6525	115	ax (40MHz)	-5.21	3.40	-1.81	-1	-0.81
Band 7	6465	103	ax (80MHz)	-5.32	3.40	-1.92	-1	-0.92
	6505	111	ax (160MHz)	-6.27	3.40	-2.87	-1	-1.87
	6535	117	ax (20MHz)	-5.86	3.40	-2.46	-1	-1.46
	6695	149	ax (20MHz)	-5.94	3.40	-2.54	-1	-1.54
	6875	185	ax (20MHz)	-5.61	3.40	-2.21	-1	-1.21
	6565	123	ax (40MHz)	-5.28	3.40	-1.88	-1	-0.88
	6685	155	ax (40MHz)	-4.90	3.40	-1.50	-1	-0.50
	6845	179	ax (40MHz)	-4.73	3.40	-1.33	-1	-0.33
	6545	119	ax (80MHz)	-5.14	3.40	-1.74	-1	-0.74
	6705	151	ax (80MHz)	-5.28	3.40	-1.88	-1	-0.88
Band 8	6865	183	ax (80MHz)	-4.99	3.40	-1.59	-1	-0.59
	6665	143	ax (160MHz)	-5.52	3.40	-2.12	-1	-1.12
	6825	175	ax (160MHz)	-5.18	3.40	-1.78	-1	-0.78
	6895	189	ax (20MHz)	-4.54	3.50	-1.04	-1	-0.04
	6995	209	ax (20MHz)	-5.87	3.50	-2.37	-1	-1.37
	7115	233	ax (20MHz)	-7.14	3.50	-3.64	-1	-2.64
	6885	187	ax (40MHz)	-4.75	3.50	-1.25	-1	-0.25
	7005	211	ax (40MHz)	-4.66	3.50	-1.16	-1	-0.16
7085	227	ax (40MHz)	-4.59	3.50	-1.09	-1	-0.09	
6945	199	ax (80MHz)	-4.96	3.50	-1.46	-1	-0.46	
7025	215	ax (80MHz)	-5.30	3.50	-1.80	-1	-0.80	
6985	207	ax (160MHz)	-4.75	3.50	-1.25	-1	-0.25	

Table 7-68. SISO Ant1 e.i.r.p. Conducted Power Spectral Density Measurements (26 Tones)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 209 of 630

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-1 Gain [dBi]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	ax (20MHz)	-5.36	3.50	-1.86	-1	-0.86
	6175	45	ax (20MHz)	-5.20	3.50	-1.70	-1	-0.70
	6415	93	ax (20MHz)	-4.71	3.50	-1.21	-1	-0.21
	5695	3	ax (40MHz)	-5.03	3.50	-1.53	-1	-0.53
	6165	43	ax (40MHz)	-5.23	3.50	-1.73	-1	-0.73
	6405	91	ax (40MHz)	-4.84	3.50	-1.34	-1	-0.34
	5985	7	ax (80MHz)	-6.18	3.50	-2.68	-1	-1.68
	6145	39	ax (80MHz)	-6.48	3.50	-2.98	-1	-1.98
	6385	87	ax (80MHz)	-6.15	3.50	-2.65	-1	-1.65
	6025	15	ax (160MHz)	-8.41	3.50	-4.91	-1	-3.91
	6185	47	ax (160MHz)	-8.42	3.50	-4.92	-1	-3.92
Band 6	6345	79	ax (160MHz)	-8.01	3.50	-4.51	-1	-3.51
	6345	97	ax (20MHz)	-5.30	3.40	-1.90	-1	-0.90
	6475	105	ax (20MHz)	-4.75	3.40	-1.35	-1	-0.35
	6515	113	ax (20MHz)	-4.75	3.40	-1.35	-1	-0.35
	6445	99	ax (40MHz)	-4.79	3.40	-1.39	-1	-0.39
	6485	107	ax (40MHz)	-5.27	3.40	-1.87	-1	-0.87
	6525	115	ax (40MHz)	-4.80	3.40	-1.40	-1	-0.40
	6465	103	ax (80MHz)	-6.02	3.40	-2.62	-1	-1.62
Band 7	6505	111	ax (160MHz)	-8.10	3.40	-4.70	-1	-3.70
	6535	117	ax (20MHz)	-5.02	3.40	-1.62	-1	-0.62
	6695	149	ax (20MHz)	-4.95	3.40	-1.55	-1	-0.55
	6875	185	ax (20MHz)	-5.14	3.40	-1.74	-1	-0.74
	6565	123	ax (40MHz)	-5.01	3.40	-1.61	-1	-0.61
	6685	155	ax (40MHz)	-4.92	3.40	-1.52	-1	-0.52
	6845	179	ax (40MHz)	-4.86	3.40	-1.46	-1	-0.46
	6545	119	ax (80MHz)	-6.23	3.40	-2.83	-1	-1.83
	6705	151	ax (80MHz)	-6.25	3.40	-2.85	-1	-1.85
	6865	183	ax (80MHz)	-5.83	3.40	-2.43	-1	-1.43
	6665	143	ax (160MHz)	-8.29	3.40	-4.89	-1	-3.89
Band 8	6825	175	ax (160MHz)	-7.73	3.40	-4.33	-1	-3.33
	6895	189	ax (20MHz)	-5.14	3.50	-1.64	-1	-0.64
	6995	209	ax (20MHz)	-5.18	3.50	-1.68	-1	-0.68
	7115	233	ax (20MHz)	-5.23	3.50	-1.73	-1	-0.73
	6885	187	ax (40MHz)	-4.85	3.50	-1.35	-1	-0.35
	7005	211	ax (40MHz)	-5.08	3.50	-1.58	-1	-0.58
	7085	227	ax (40MHz)	-4.88	3.50	-1.38	-1	-0.38
	6945	199	ax (80MHz)	-6.01	3.50	-2.51	-1	-1.51
7025	215	ax (80MHz)	-5.91	3.50	-2.41	-1	-1.41	
6985	207	ax (160MHz)	-7.61	3.50	-4.11	-1	-3.11	


Table 7-69. SISO Ant1 e.i.r.p. Conducted Power Spectral Density Measurements (Full Tones)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 210 of 630

SISO Antenna-1 Power Spectral Density Measurements (26 Tones)



Plot 7-321. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) UNII Band 5) – Ch. 2

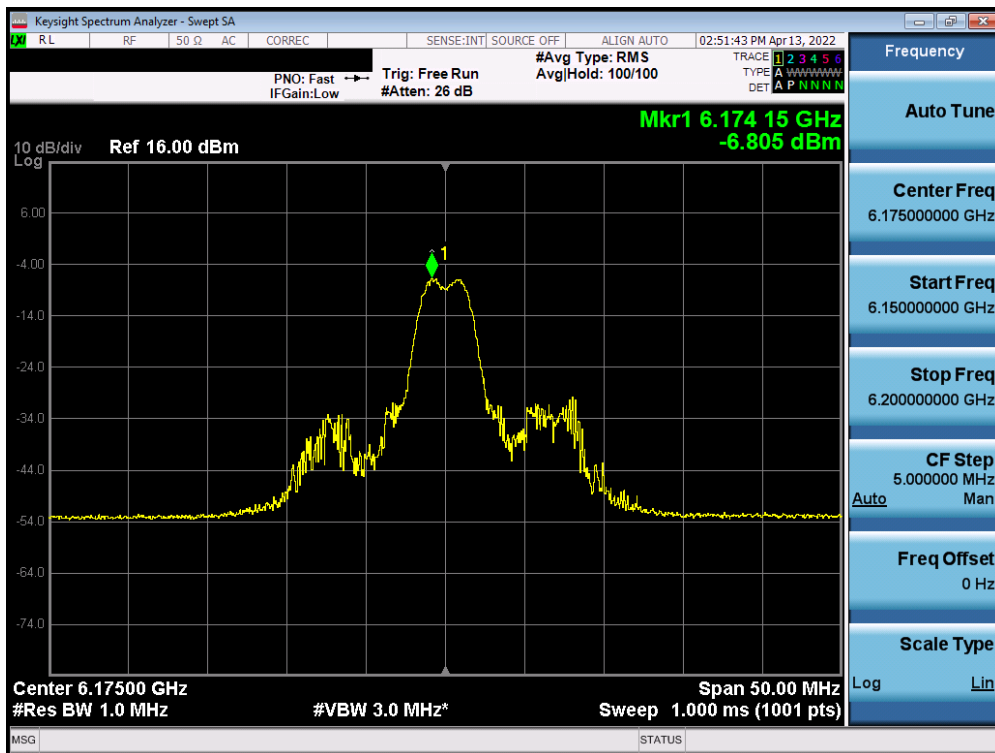


Plot 7-322. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 45)

FCC ID: C3K1997		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device		Page 211 of 630




Plot 7-323. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) UNII Band 5) – Ch. 93)

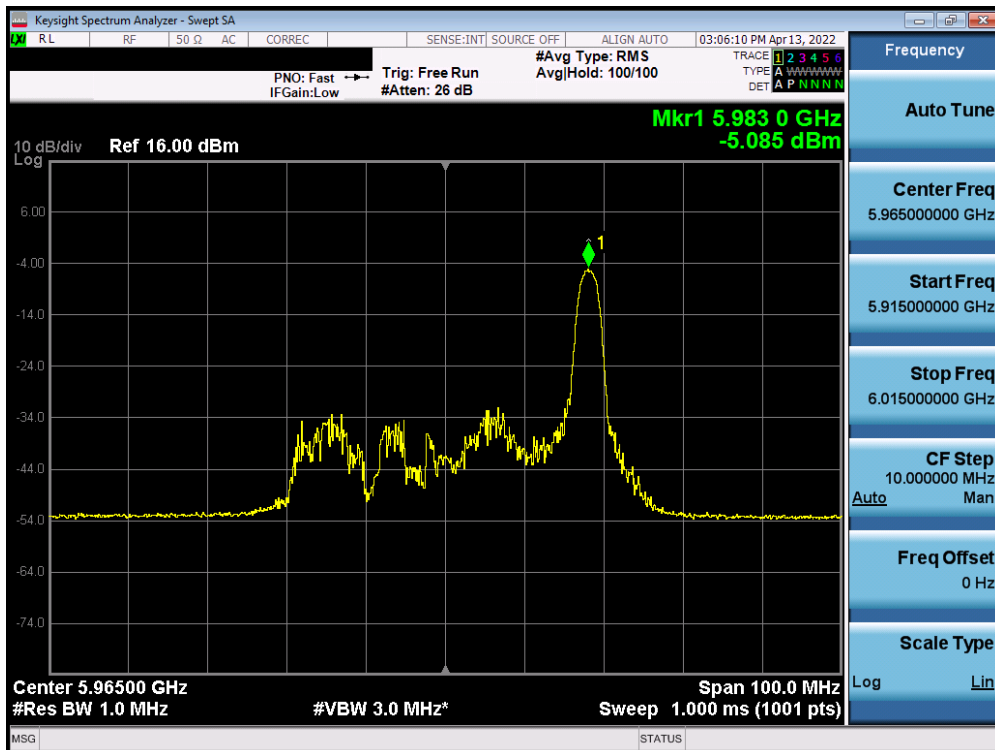


Plot 7-324. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 3)

FCC ID: C3K1997		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device		Page 212 of 630

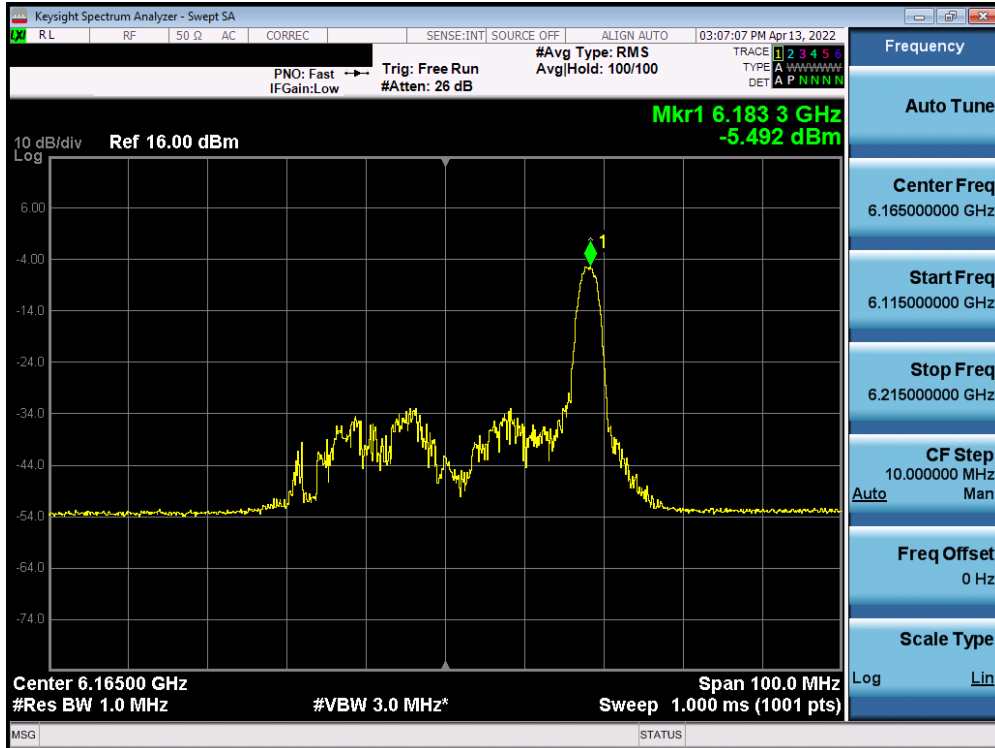


Plot 7-325. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 43)

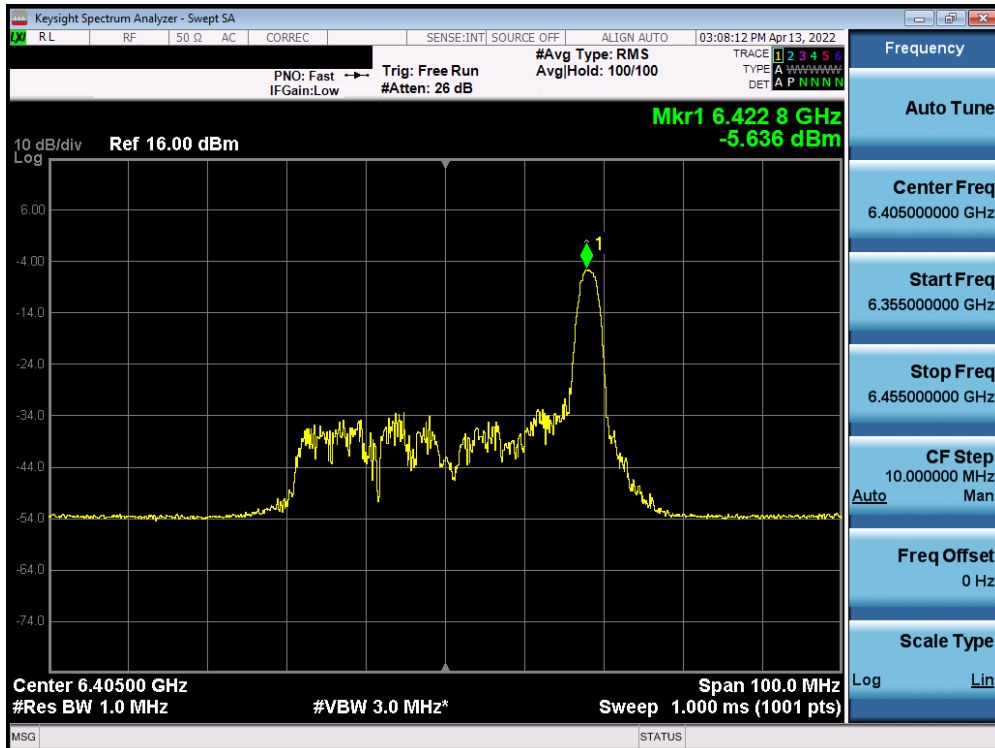

Plot 7-326. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 91)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 213 of 630

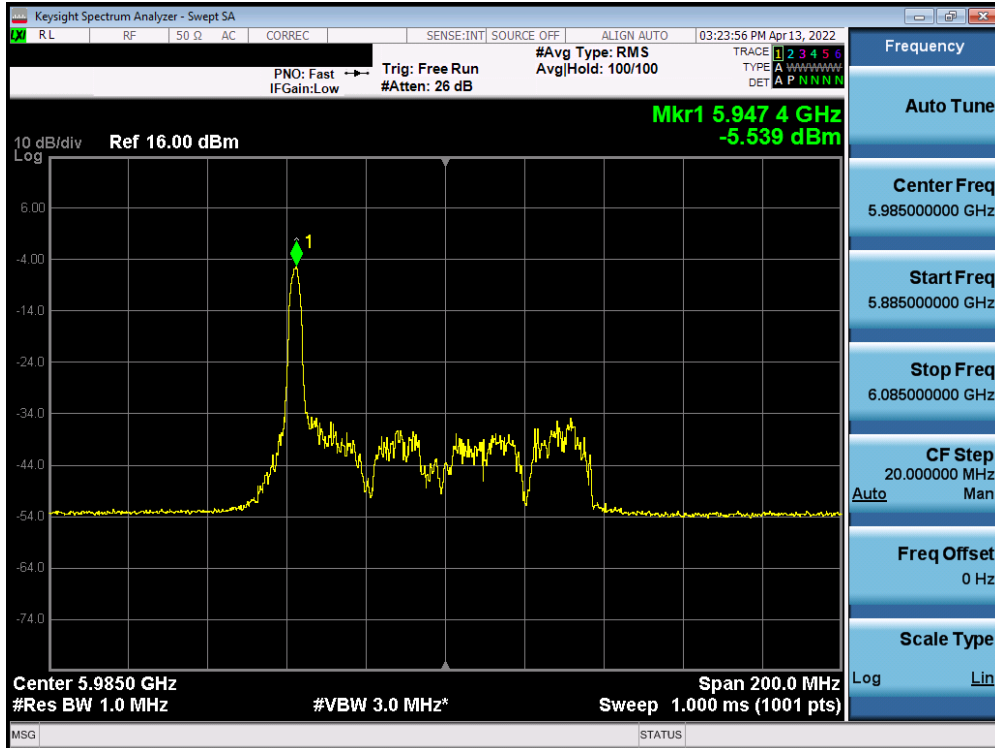


Plot 7-327. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 7)




Plot 7-328. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 39)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 214 of 630

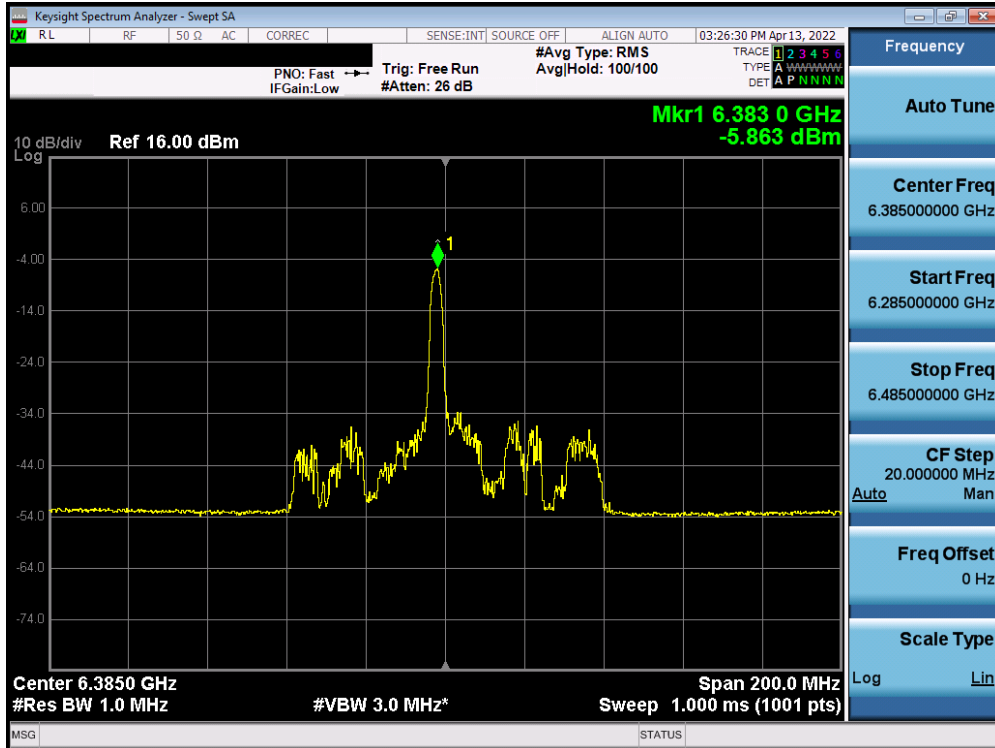


Plot 7-329. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 87)

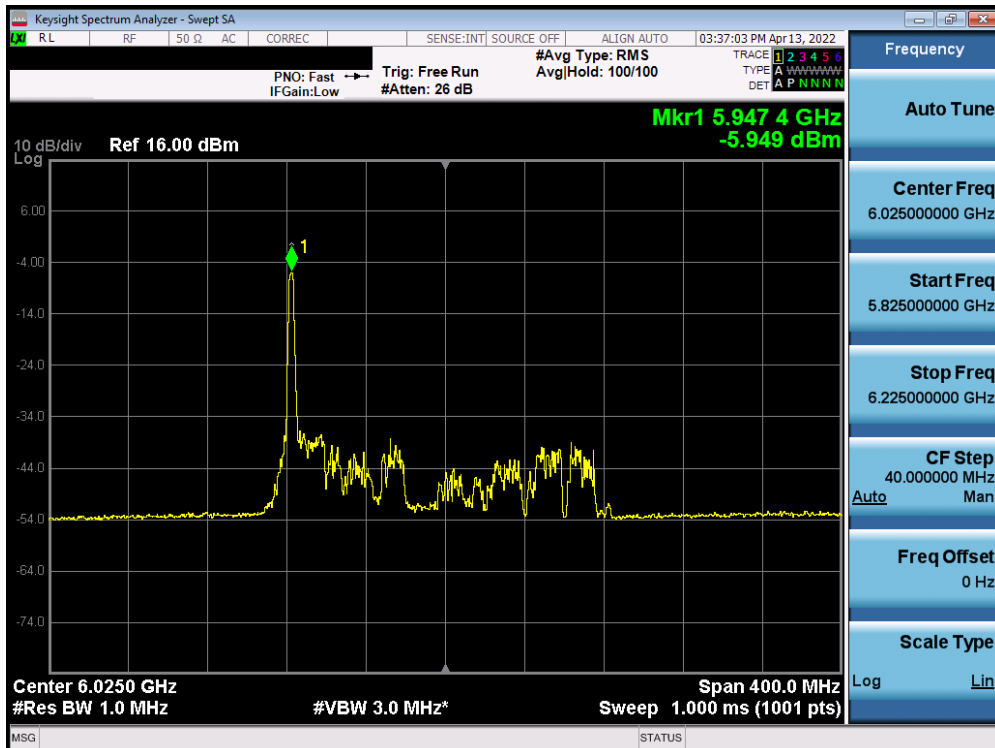


Plot 7-330. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 15)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 215 of 630

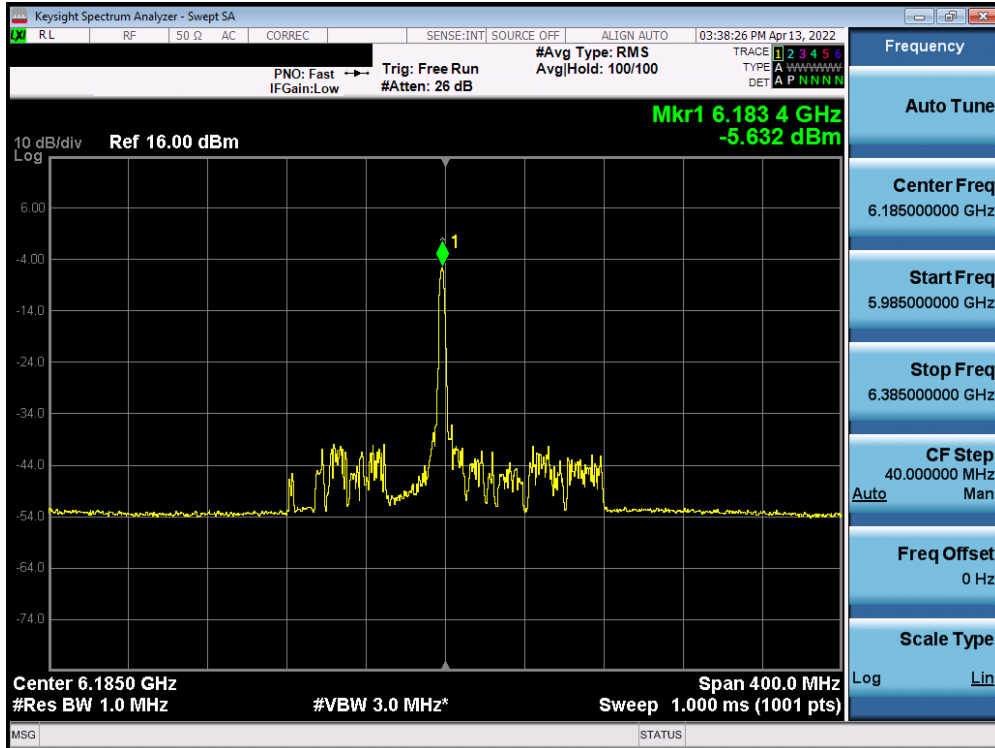


Plot 7-331. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 47)

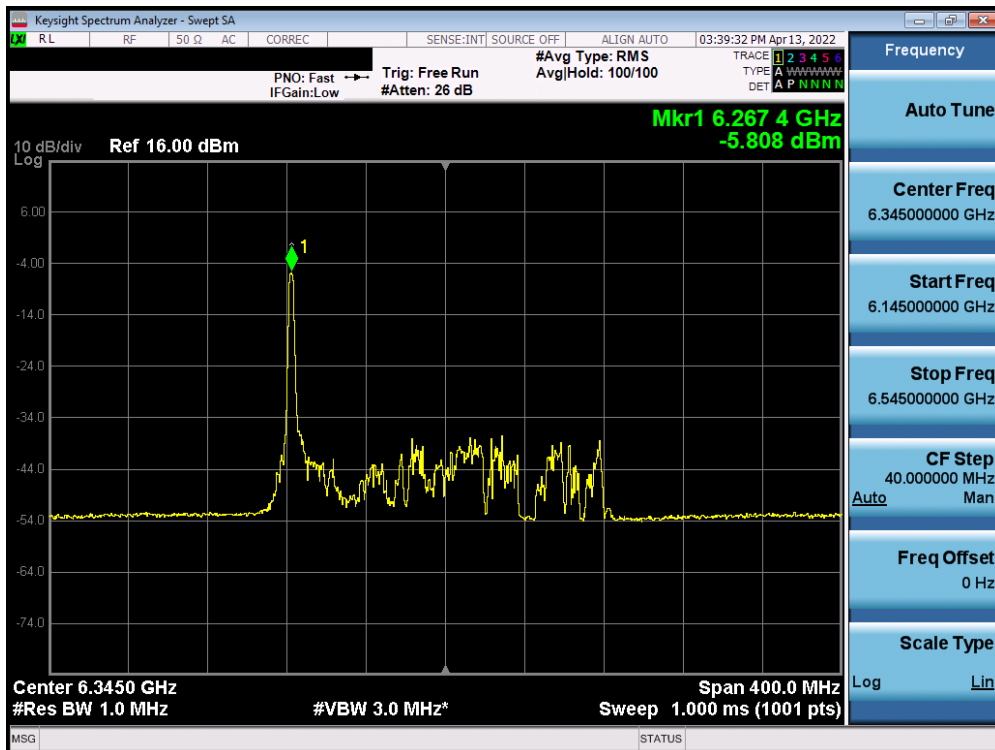


Plot 7-332. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 79)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 216 of 630

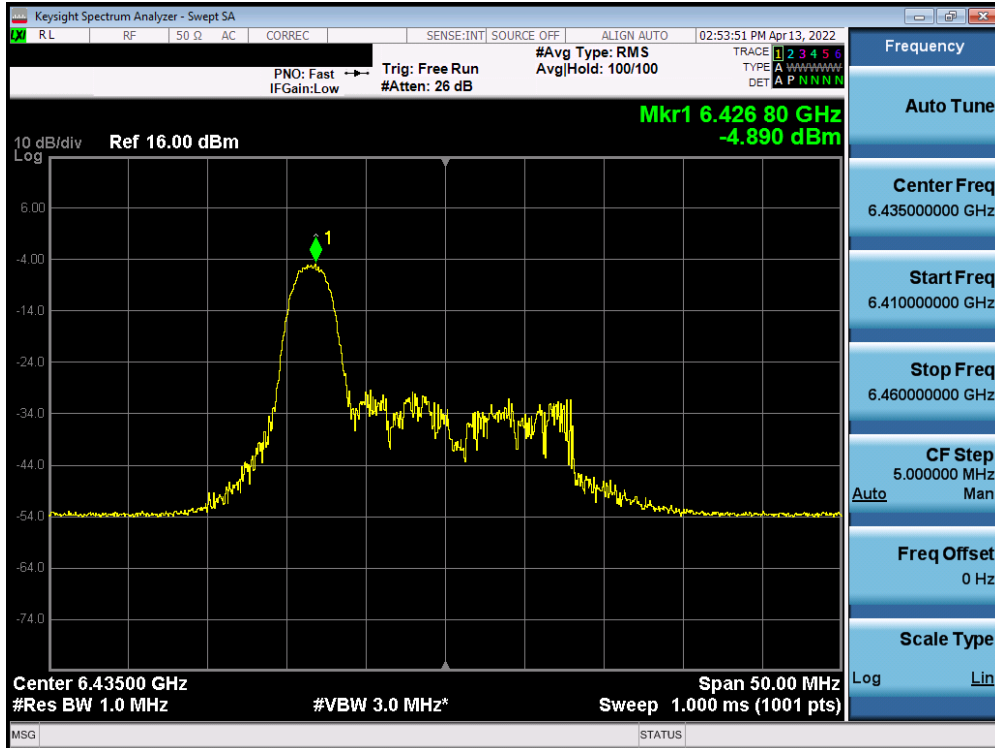

Plot 7-333. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 97)

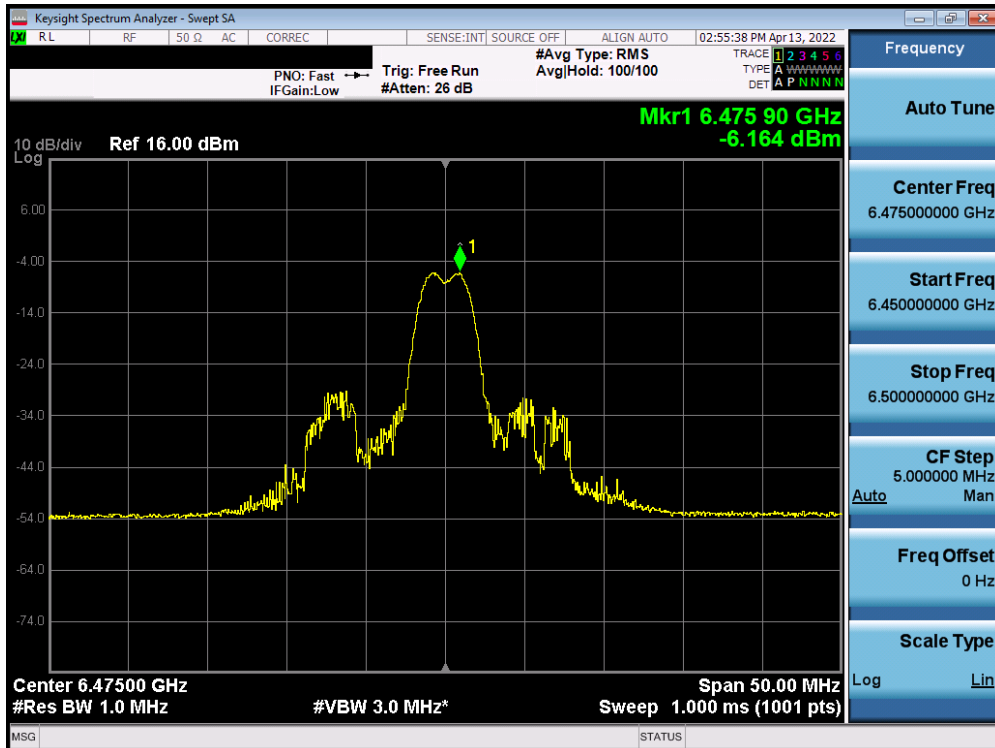

Plot 7-334. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 105)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 217 of 630



Plot 7-335. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 113)




Plot 7-336. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 99)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 218 of 630




Plot 7-337. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 107)

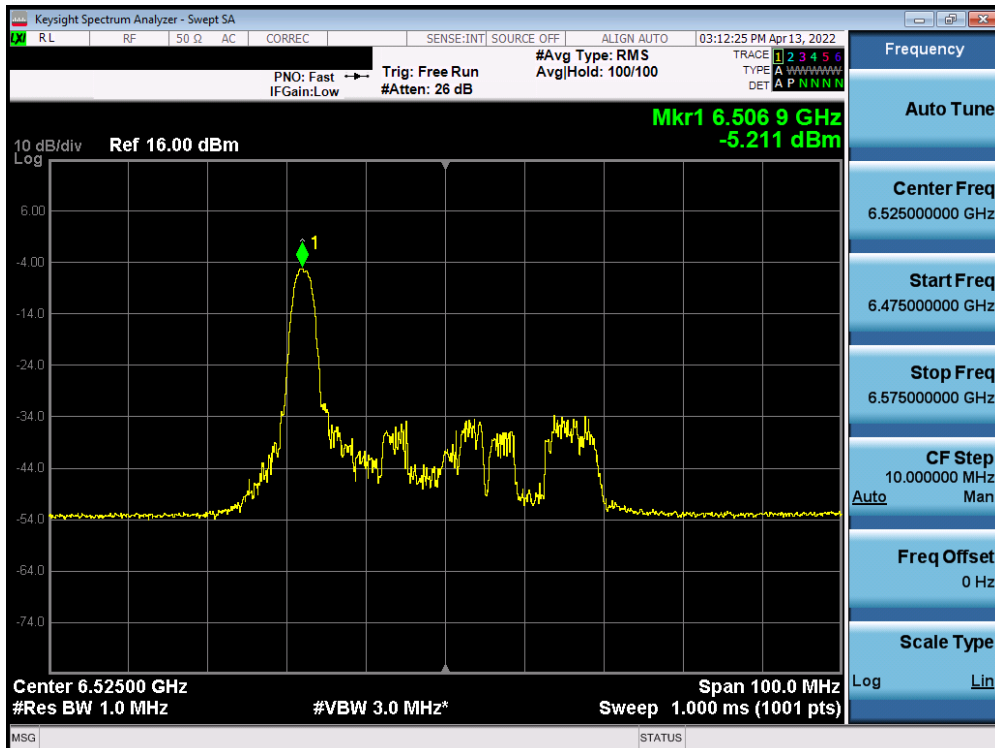


Plot 7-338. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 115)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 219 of 630

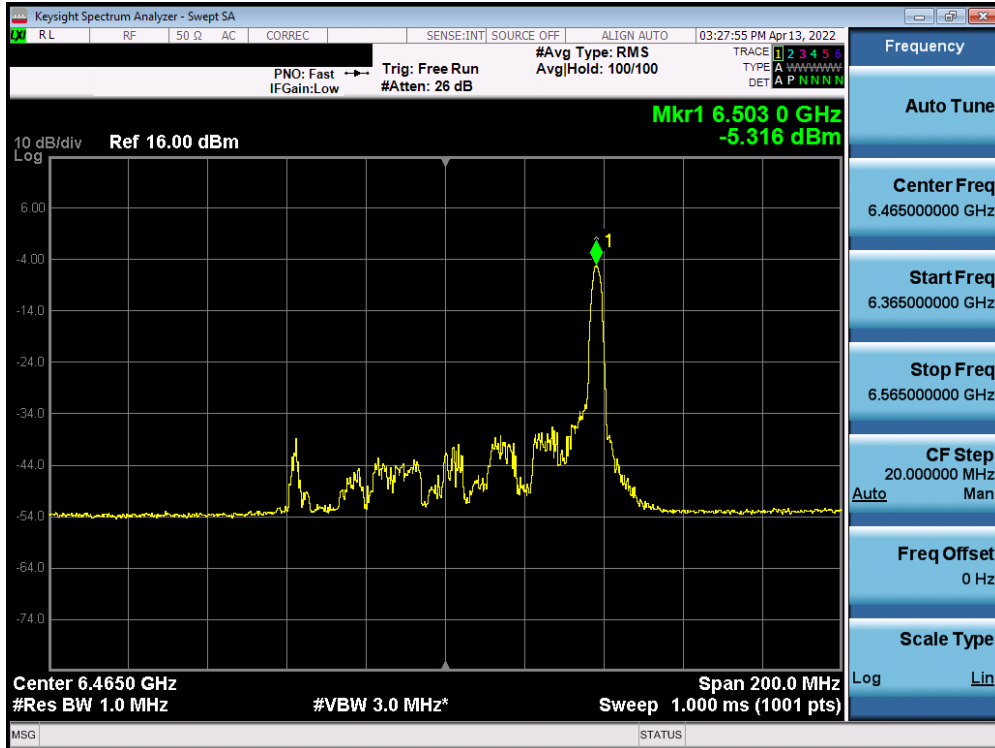


Plot 7-339. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 103)

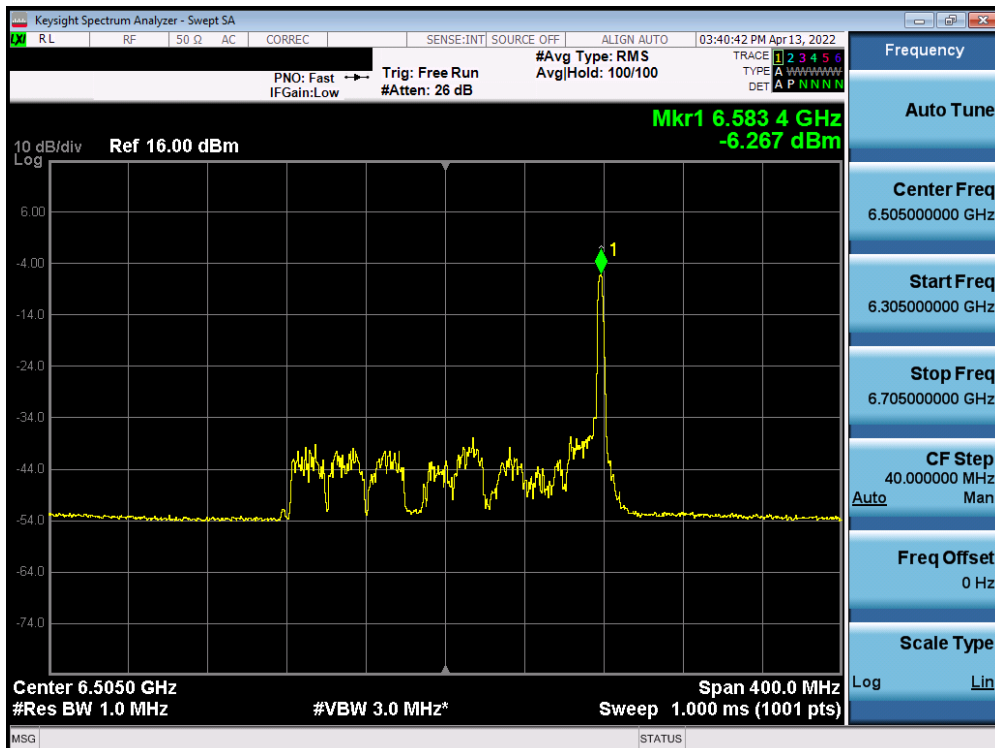


Plot 7-340. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 111)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 220 of 630

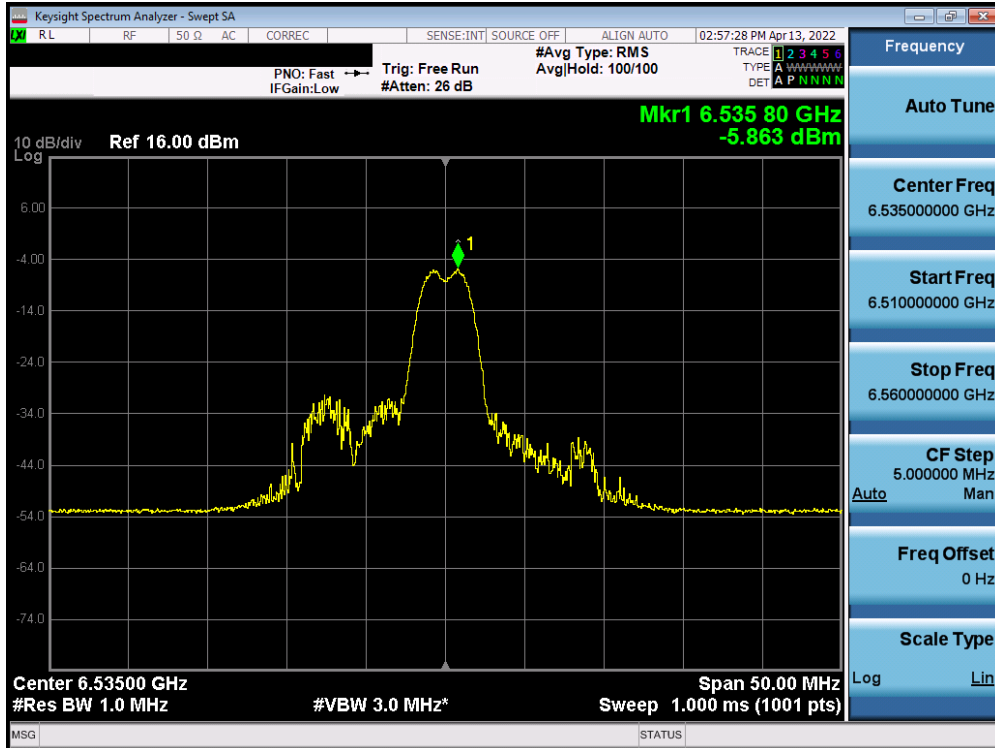


Plot 7-341. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 117)

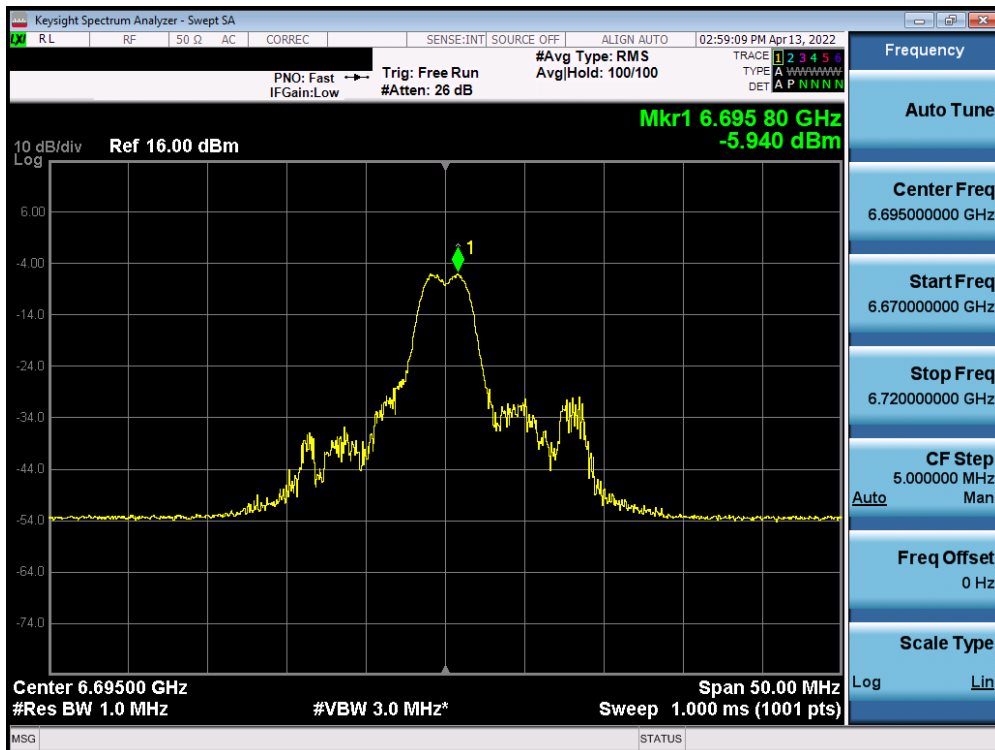


Plot 7-342. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 149)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 221 of 630

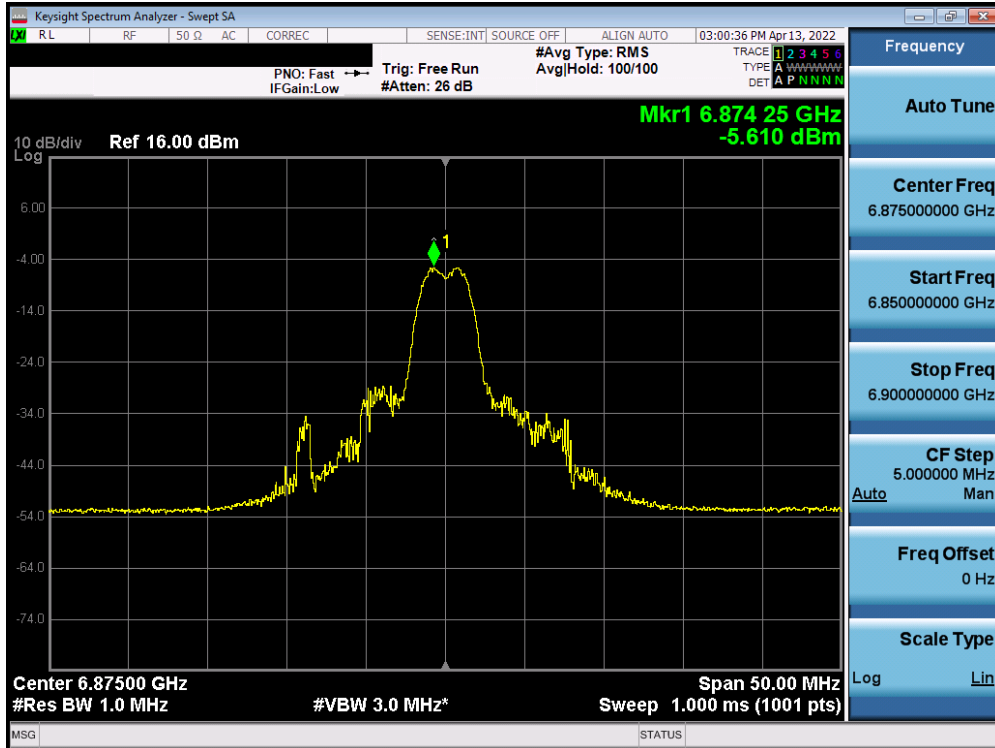


Plot 7-343. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 185)

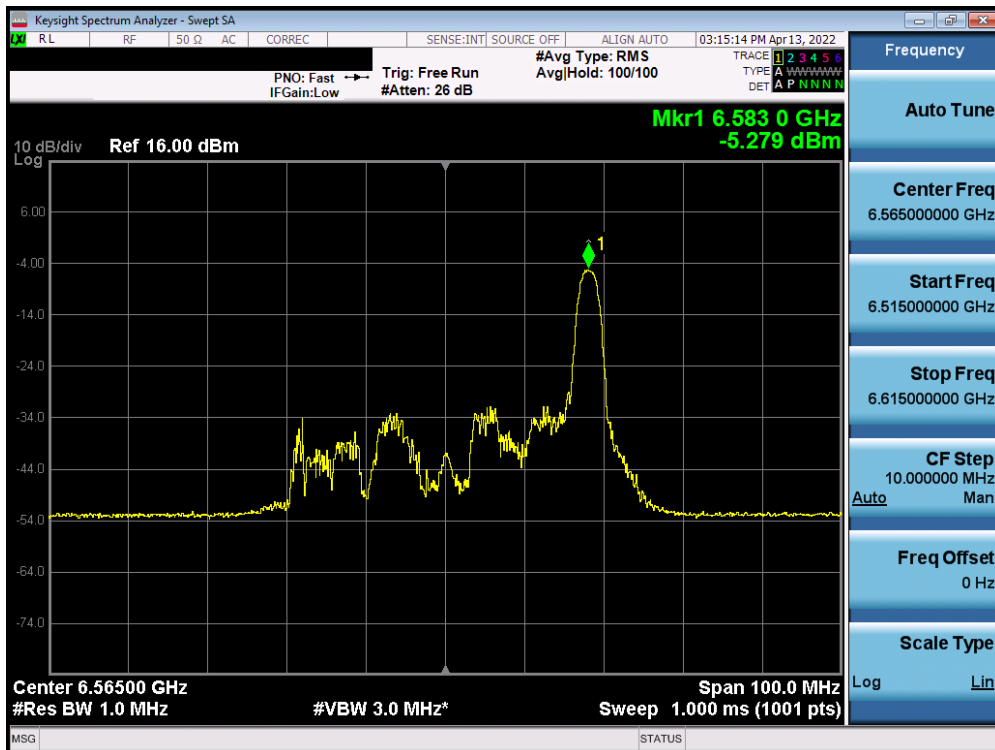


Plot 7-344. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 123)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 222 of 630

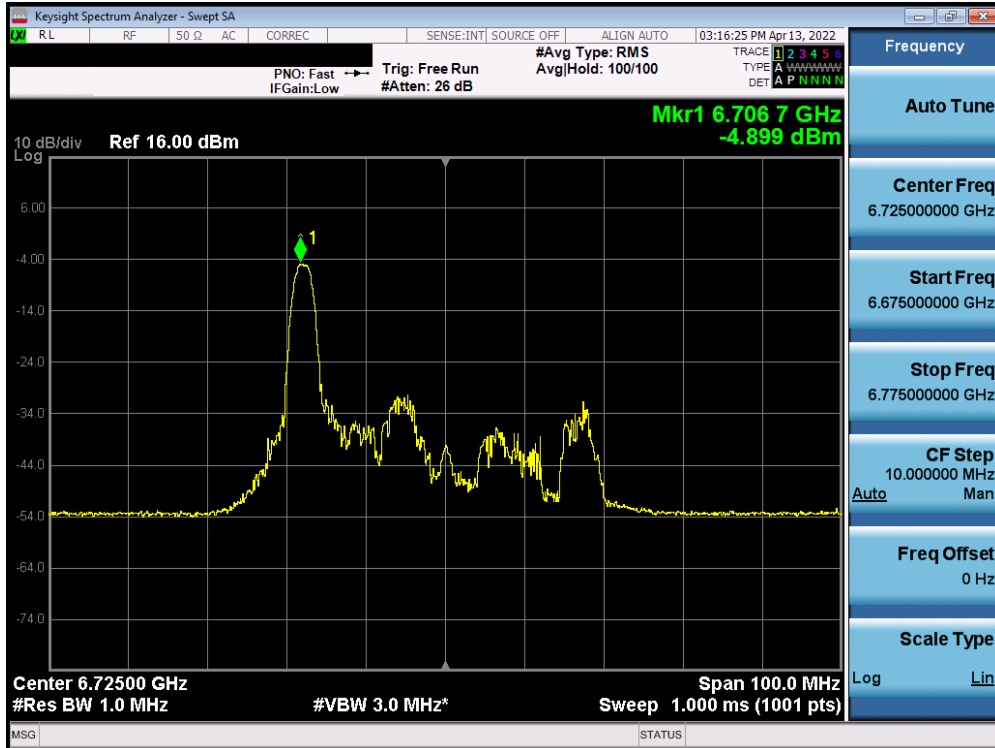

Plot 7-345. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 155)

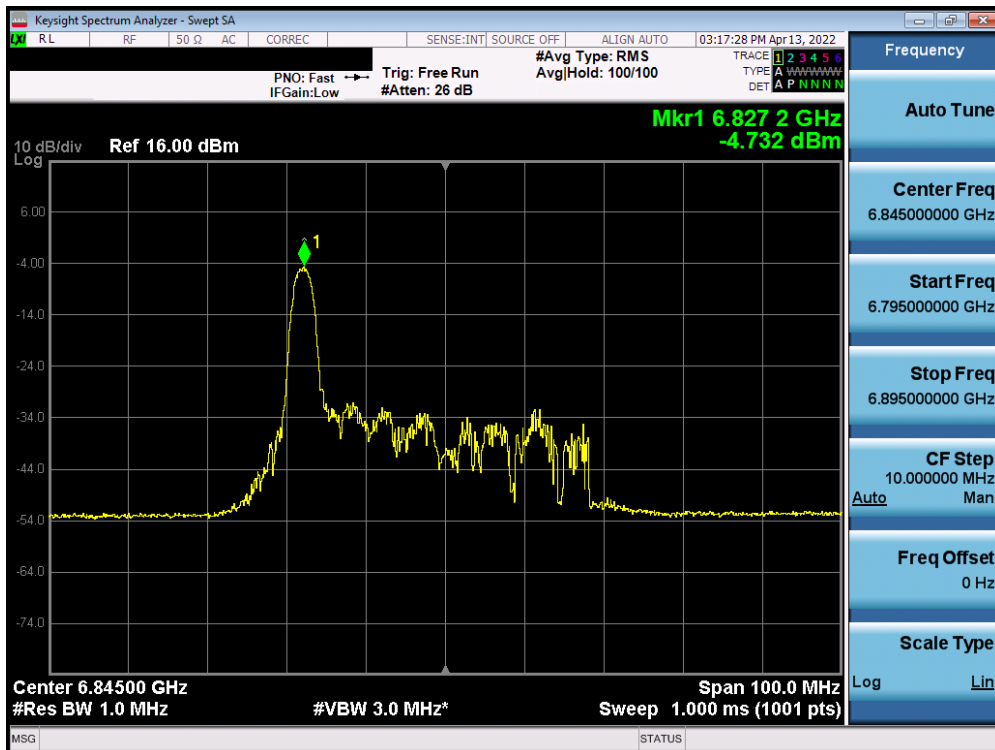


Plot 7-346. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 179)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 223 of 630



Plot 7-347. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 119)

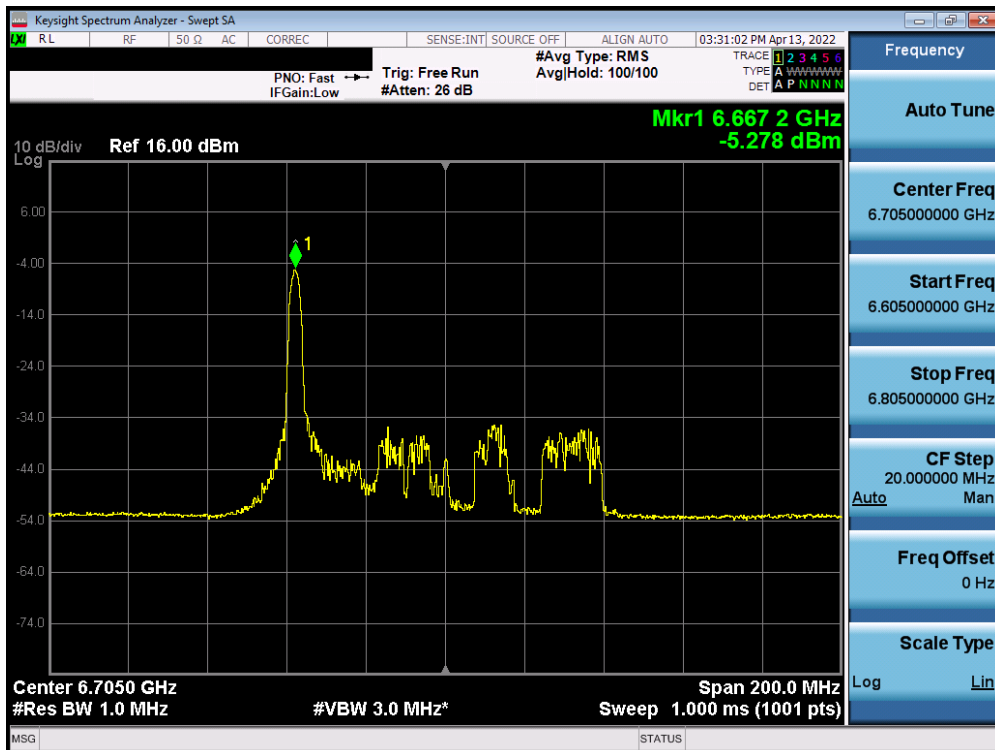


Plot 7-348. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 151)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 224 of 630




Plot 7-349. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 183)

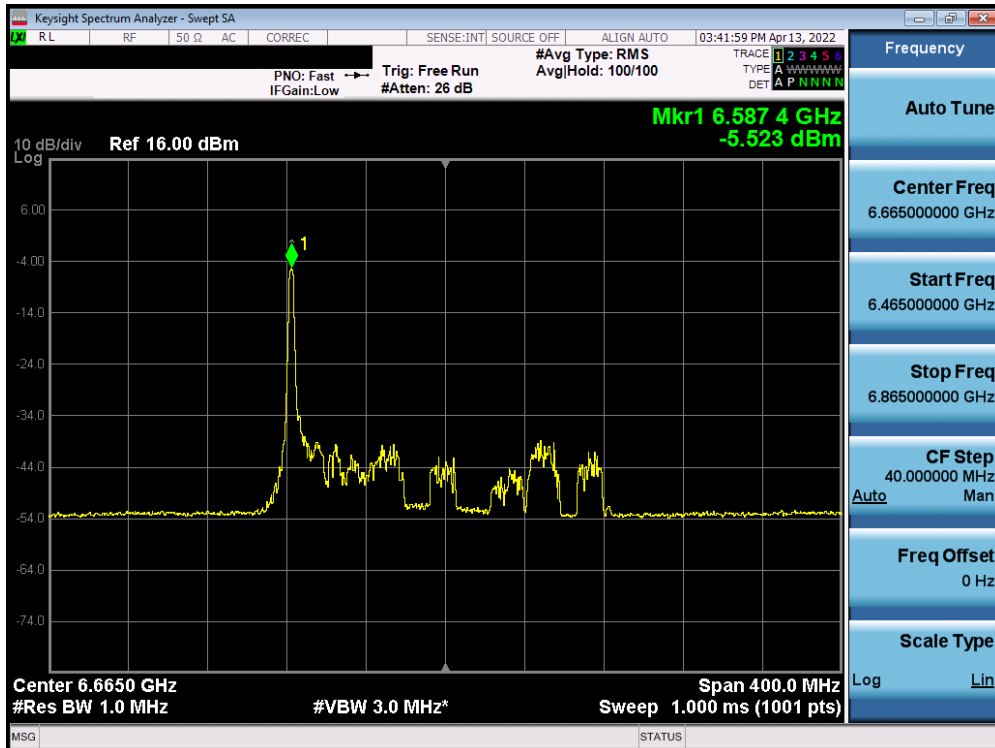


Plot 7-350. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 143)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 225 of 630

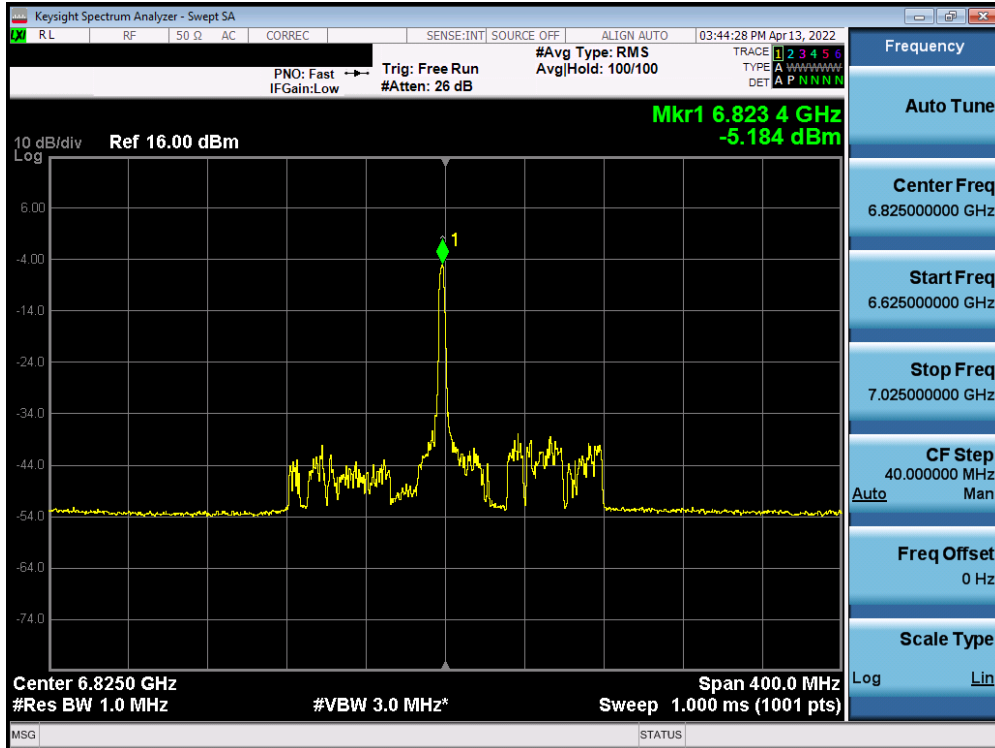

Plot 7-351. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 175)

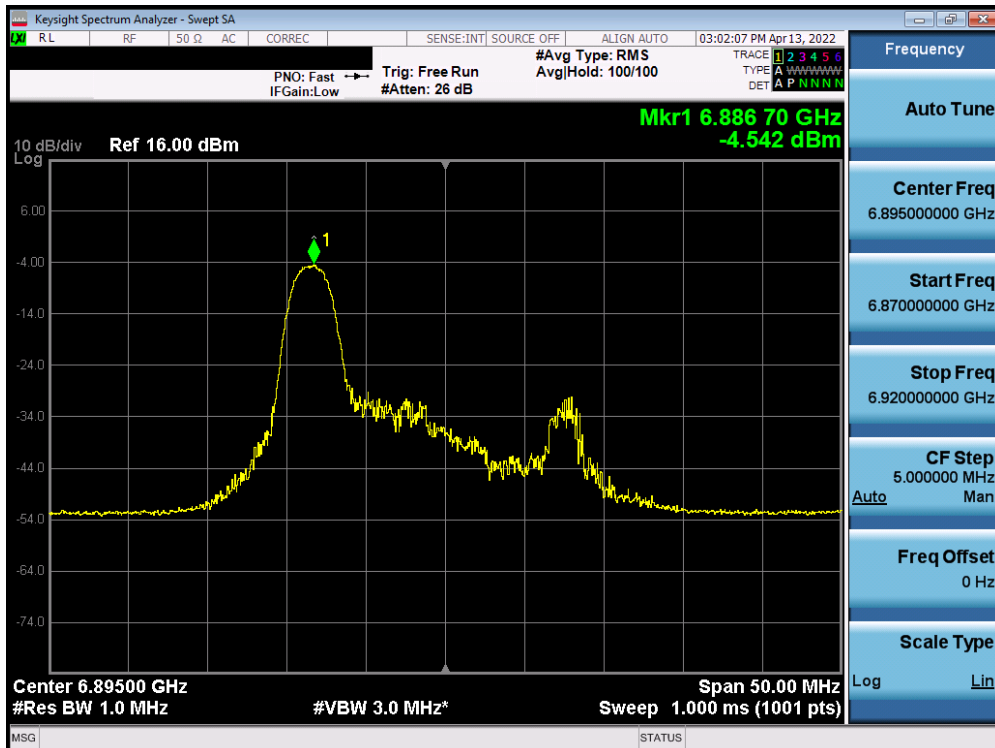

Plot 7-352. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 189)

FCC ID: C3K1997	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204040049-18-R2.C3K	Test Dates: 3/14/2022 – 8/18/2022	EUT Type: Portable Computing Device	Page 226 of 630