



CHANNEL 142 RESULTS

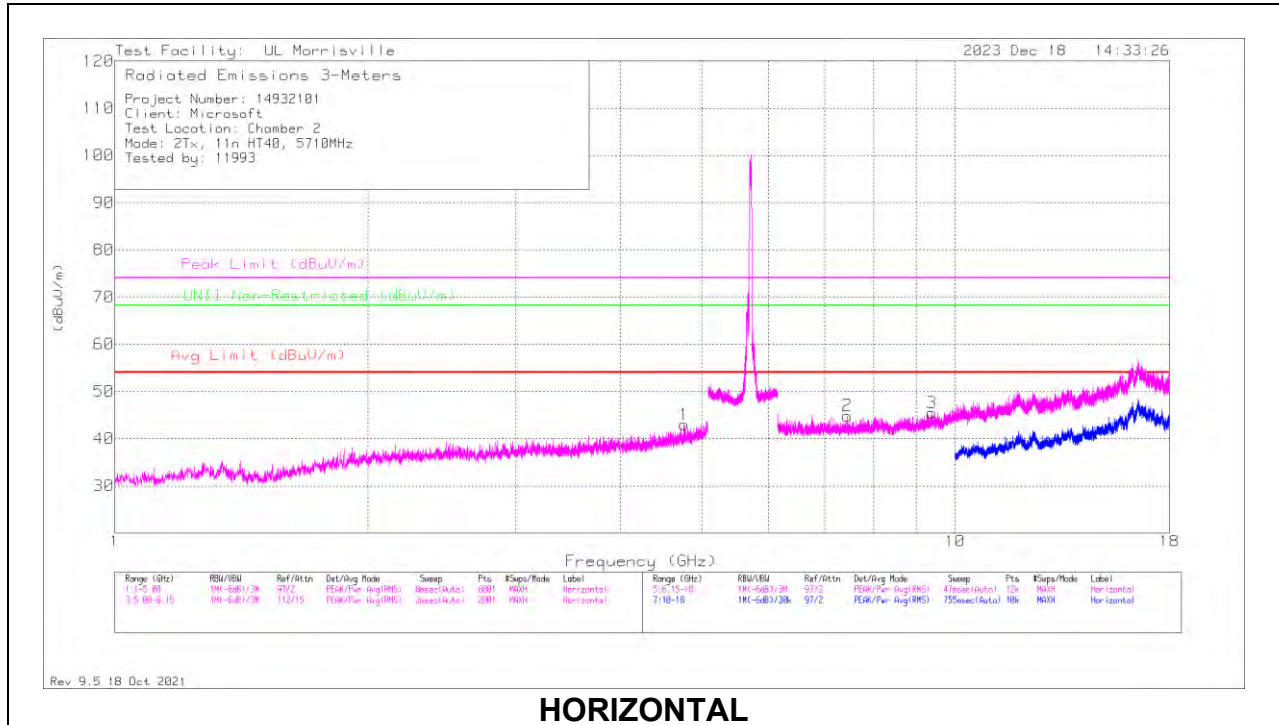

HORIZONTAL

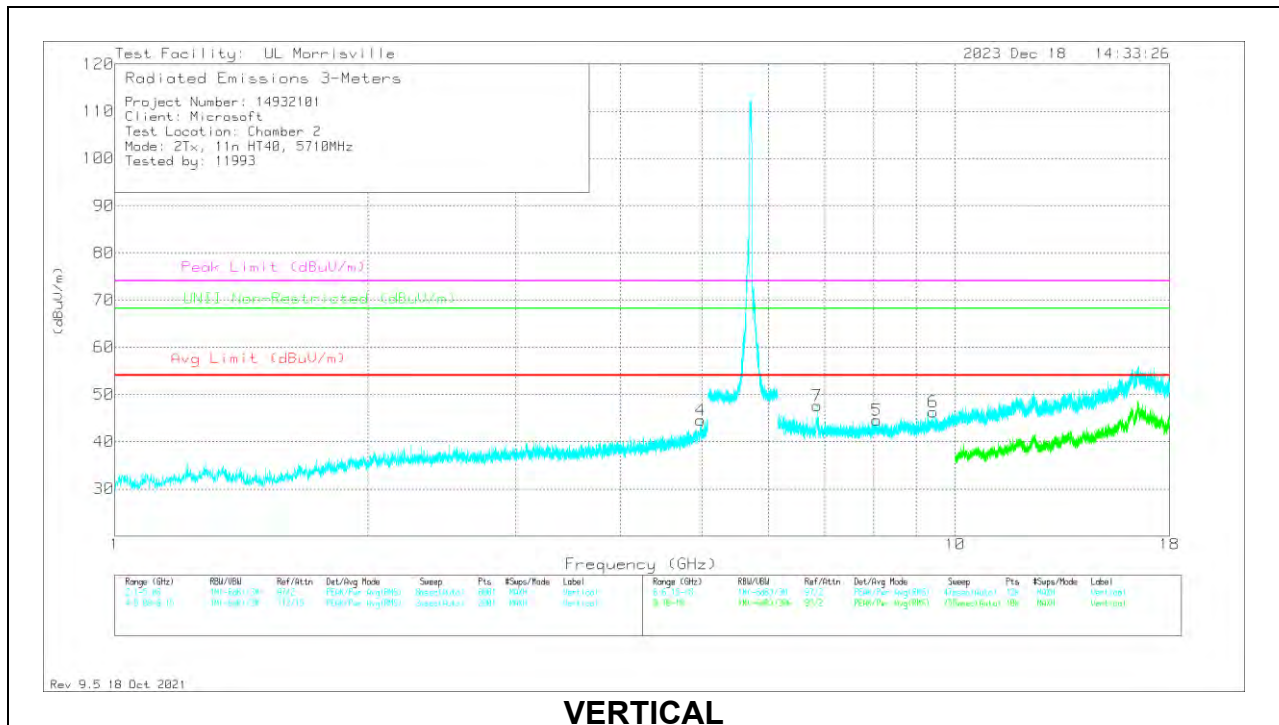

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.75972	39.32	Pk	34.2	-30.5	43.02	54	-10.98	74	-30.98	-	-	0-360	199	H
4	* ** 4.98276	39.75	Pk	34	-29.2	44.55	54	-9.45	74	-29.45	-	-	0-360	101	V
2	* ** 7.44955	36.59	Pk	35.6	-27.3	44.89	54	-9.11	74	-29.11	-	-	0-360	101	H
3	* ** 9.39493	35.25	Pk	36.2	-26	45.45	54	-8.55	74	-28.55	-	-	0-360	199	H
5	* ** 8.07168	35.55	Pk	35.8	-26.8	44.55	54	-9.45	74	-29.45	-	-	0-360	101	V
6	* ** 9.41369	35.65	Pk	36.2	-25.6	46.25	54	-7.75	74	-27.75	-	-	0-360	101	V
7	6.85113	40.05	Pk	35.7	-28.1	47.65	-	-	-	-	68.2	-20.55	0-360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

10.1.20. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

2TX CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

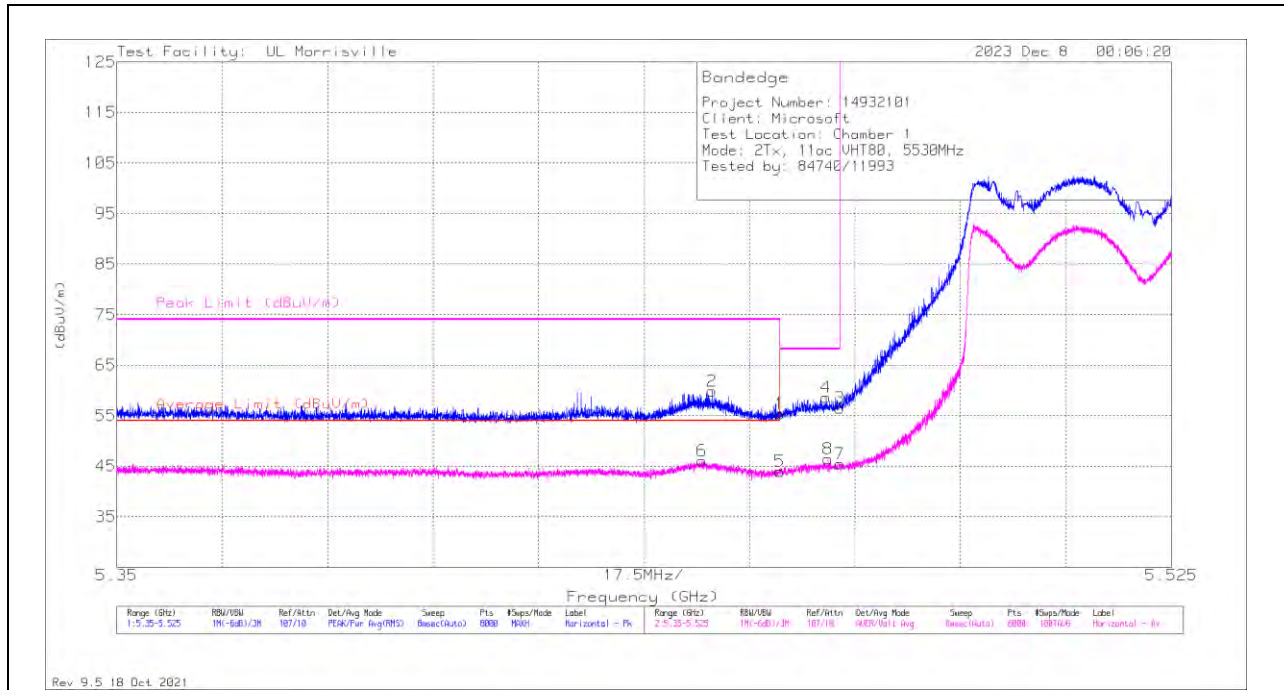

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	34.34	Pk	34.4	-23.3	10	0	55.44	-	-	74	-18.56	33	380	H
2	*** 5.4488	38.58	Pk	34.4	-23.1	10	0	59.88	-	-	74	-14.12	33	380	H
5	*** 5.45998	22.82	ADV	34.4	-23.3	10	0.21	44.03	54	-9.97	-	-	33	380	H
6	*** 5.44707	24.81	ADV	34.4	-23.1	10	0.21	46.32	54	-7.68	-	-	33	380	H
4	5.46768	37.56	Pk	34.4	-23.3	10	0	58.66	-	-	68.2	-9.54	33	380	H
8	5.46801	25.32	ADV	34.4	-23.3	10	0.21	46.63	-	-	-	-	33	380	H
3	5.46998	35.28	Pk	34.4	-23.2	10	0	56.48	-	-	68.2	-11.72	33	380	H
7	5.46998	24.2	ADV	34.4	-23.2	10	0.21	45.61	-	-	-	-	33	380	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

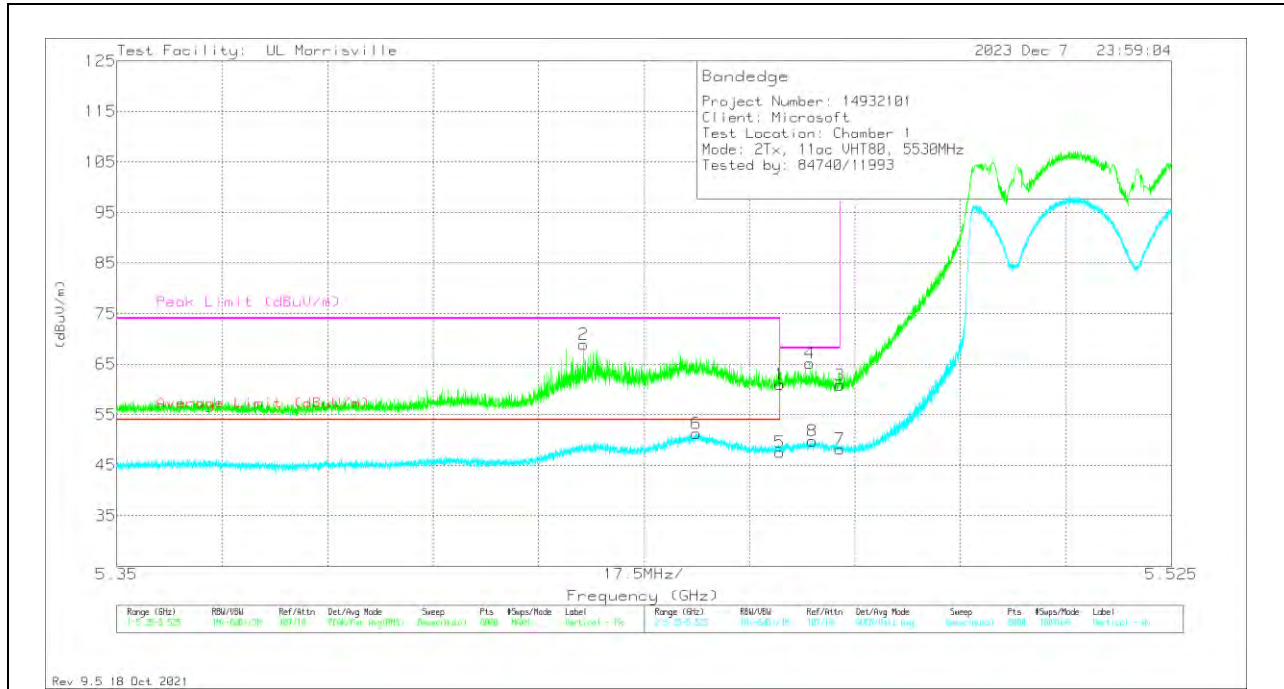

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	39.91	Pk	34.4	-23.3	10	0	61.01	-	-	74	-12.99	318	270	V
2	*** 5.42747	47.52	Pk	34.5	-23	9.9	0	68.92	-	-	74	-5.08	318	270	V
5	*** 5.45998	26.51	ADV	34.4	-23.3	10	0.21	47.83	54	-6.18	-	-	318	270	V
6	*** 5.44615	29.95	ADV	34.4	-23.1	10	0.21	51.56	54	-2.54	-	-	318	270	V
4	5.46501	44.2	Pk	34.4	-23.4	10	0	65.2	-	-	68.2	-3	318	270	V
8	5.46543	28.83	ADV	34.4	-23.4	10	0.21	49.94	-	-	-	-	318	270	V
3	5.46998	39.6	Pk	34.4	-23.2	10	0	60.8	-	-	68.2	-7.4	318	270	V
7	5.46998	26.93	ADV	34.4	-23.2	10	0.21	48.34	-	-	-	-	318	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

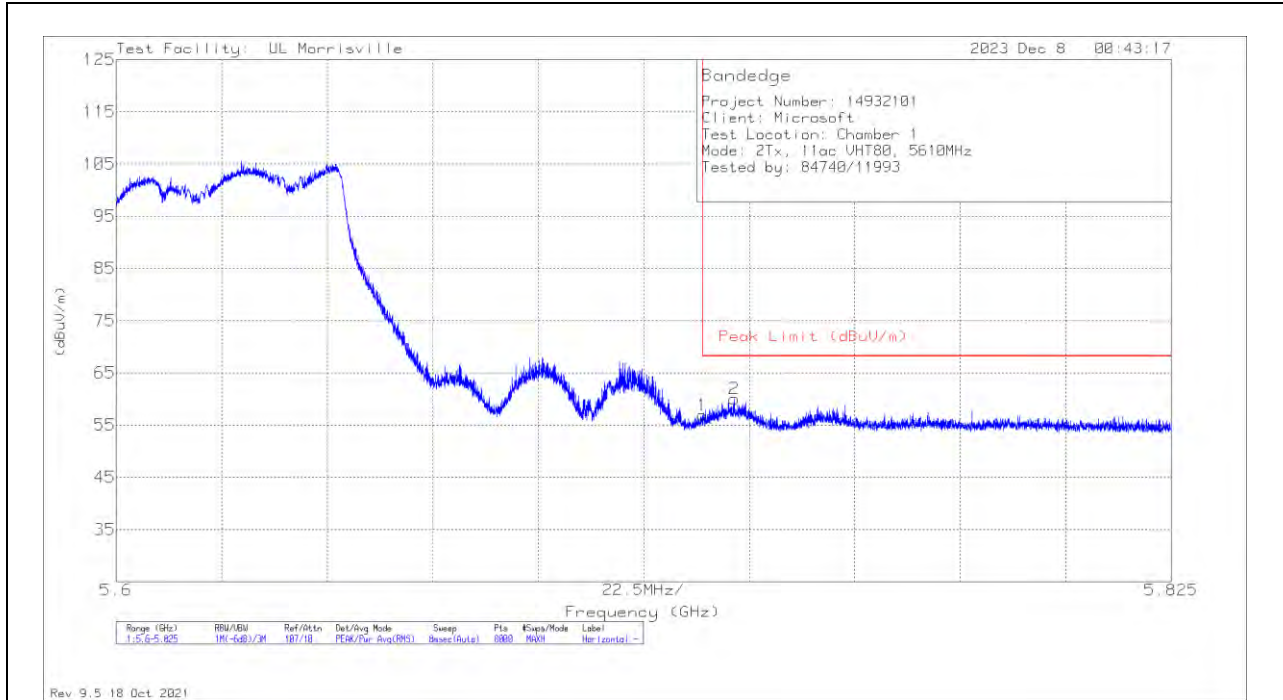

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	35.39	Pk	34.5	-23	10	56.89	68.2	-11.31	30	336	H
2	5.73178	38.52	Pk	34.5	-22.9	9.9	60.02	68.2	-8.18	30	336	H

Pk - Peak detector

VERTICAL RESULT

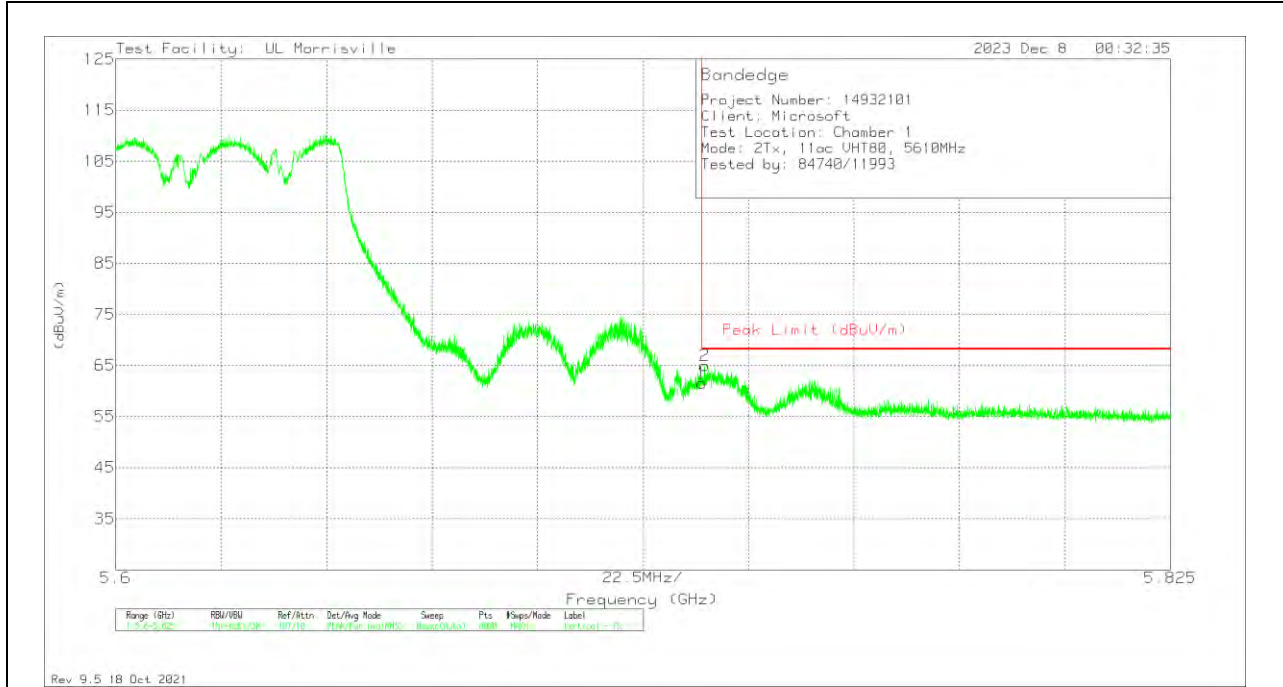

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.1	Pk	34.5	-23	10	61.6	68.2	-6.6	343	270	V
2	5.72565	43.44	Pk	34.5	-23	10	64.94	68.2	-3.26	343	270	V


Pk - Peak detector

10.1.21. TX ABOVE 1 GHz 802.11ac VHT160 MODE IN THE 5.6 GHz BAND

2TX CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

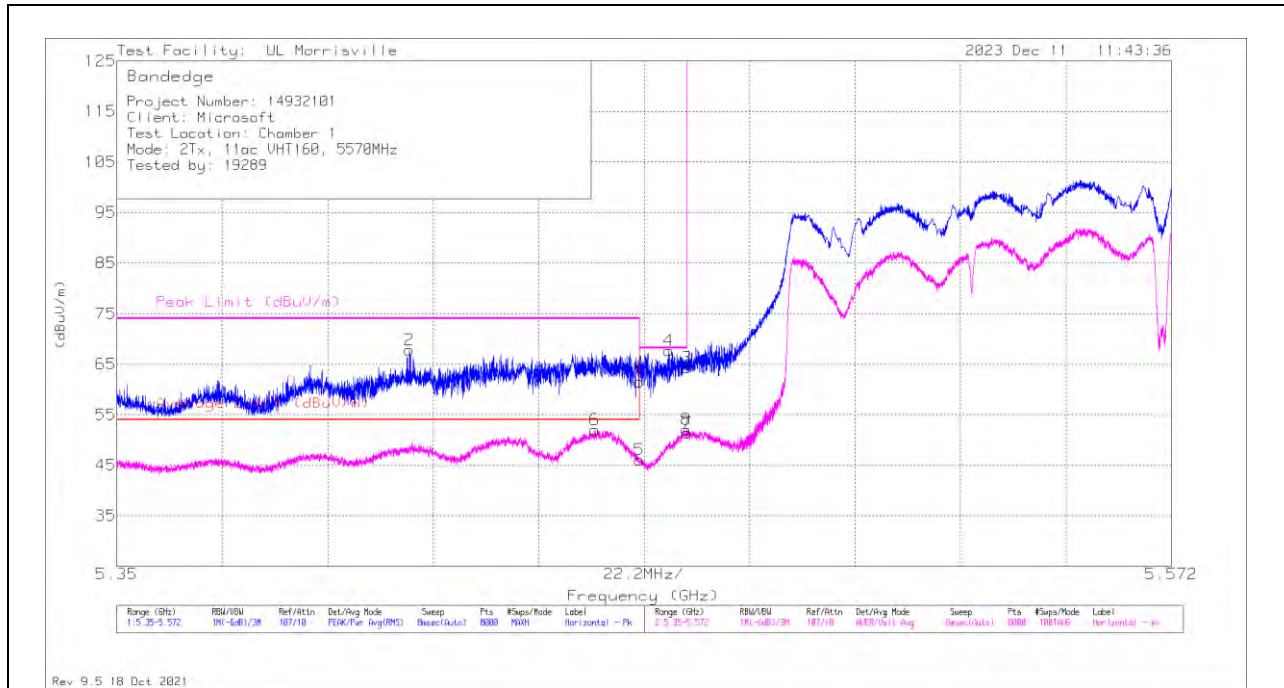

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	40.43	Pk	34.4	-23.3	10	0	61.53	-	-	74	-12.47	31	390	H
2	*** 5.41158	46.59	Pk	34.5	-23.3	10	0	67.79	-	-	74	-6.21	31	390	H
5	*** 5.45999	24.96	ADV	34.4	-23.3	10	0.43	46.49	54	-7.51	-	-	31	390	H
6	*** 5.45066	30.79	ADV	34.4	-23.2	10	0.43	52.42	54	-1.58	-	-	31	390	H
4	5.4662	46.66	Pk	34.4	-23.4	10	0	67.66	-	-	68.2	-5.4	31	390	H
8	5.46992	30.81	ADV	34.4	-23.2	10	0.43	52.44	-	-	-	-	31	390	H
3	5.46998	43.15	Pk	34.4	-23.2	10	0	64.35	-	-	68.2	-3.85	31	390	H
7	5.46998	30.16	ADV	34.4	-23.2	10	0.43	51.79	-	-	-	-	31	390	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

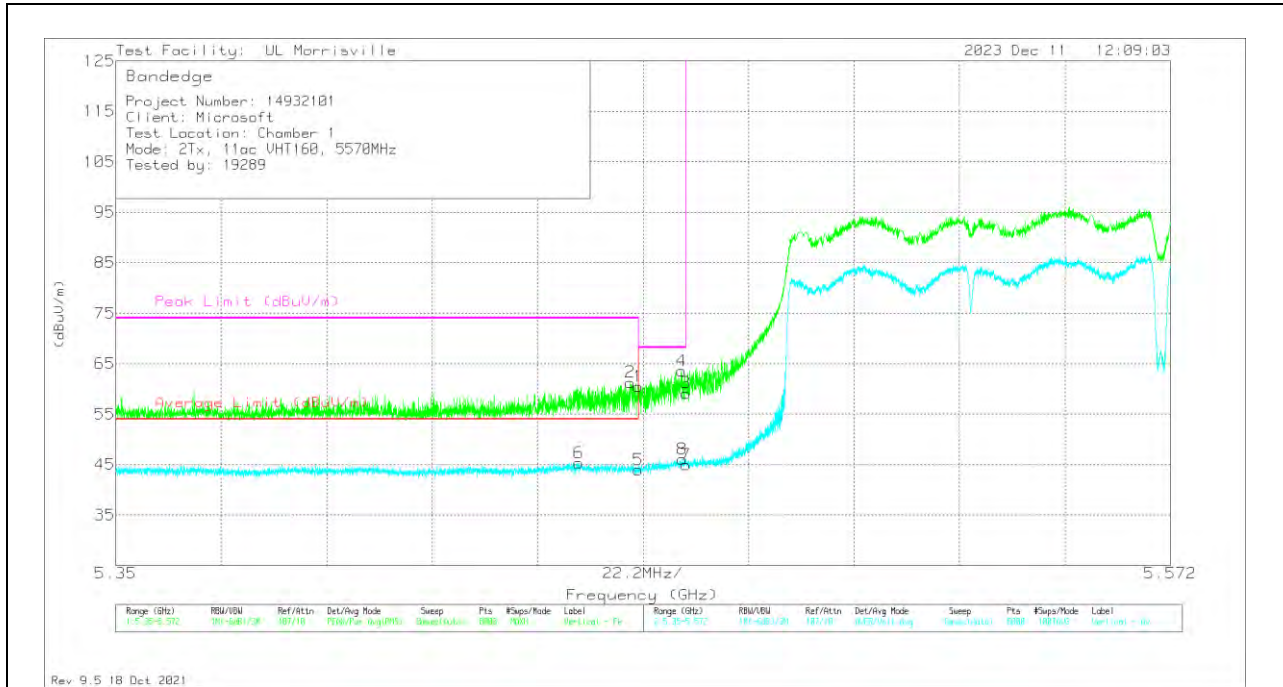


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	39.38	Pk	34.4	-23.3	10	0	60.48	-	-	74	-13.52	356	245	V
2	*** 5.45824	40.18	Pk	34.4	-23.3	10	0	61.28	-	-	74	-12.72	356	245	V
5	*** 5.45999	22.89	ADV	34.4	-23.3	10	0.43	44.42	54	-9.48	-	-	356	245	V
6	*** 5.4475	24.02	ADV	34.4	-23.1	10	0.43	45.75	54	-8.25	-	-	356	245	V
4	5.46909	42.35	Pk	34.4	-23.2	10	0	63.55	-	-	68.2	-4.65	356	245	V
8	5.46925	24.83	ADV	34.4	-23.2	10	0.43	46.46	-	-	-	-	356	245	V
3	5.46998	37.97	Pk	34.4	-23.2	10	0	59.17	-	-	68.2	-9.03	356	245	V
7	5.46998	23.78	ADV	34.4	-23.2	10	0.43	45.41	-	-	-	-	356	245	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

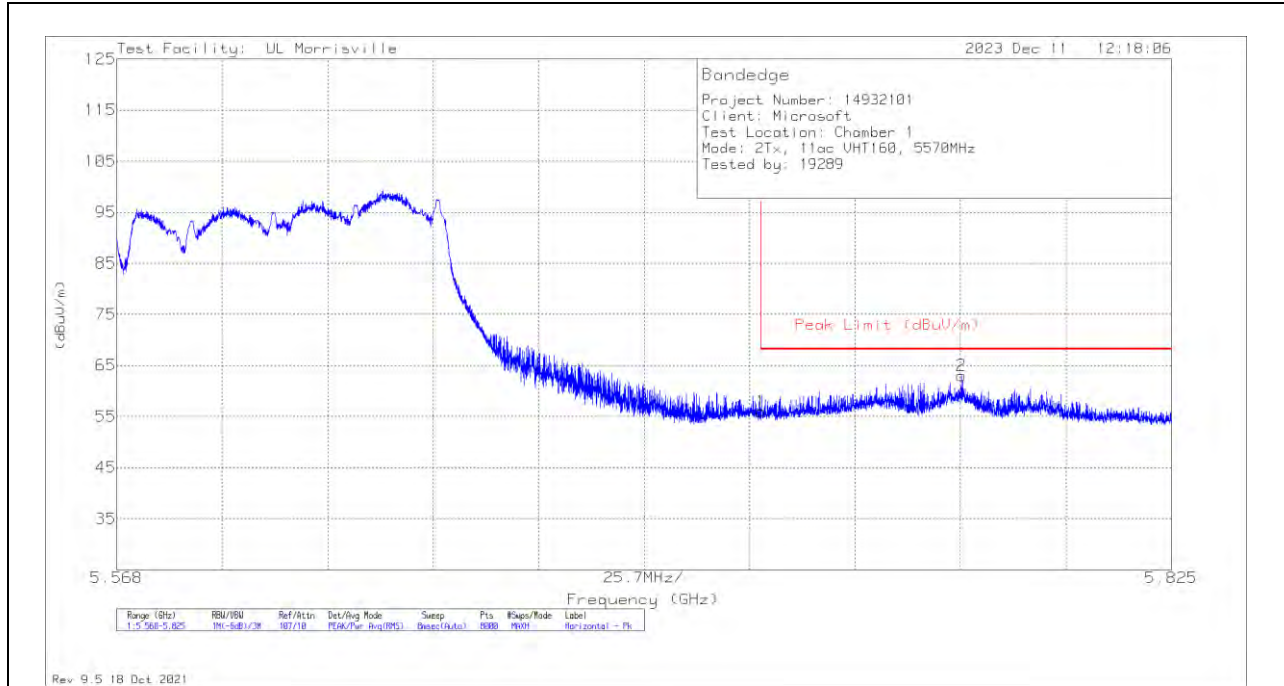

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	34.47	Pk	34.5	-23	10	55.97	68.2	-12.23	29	399	H
2	5.77379	41.49	Pk	34.6	-23.1	10	62.99	68.2	-5.21	29	399	H

Pk - Peak detector

VERTICAL RESULT

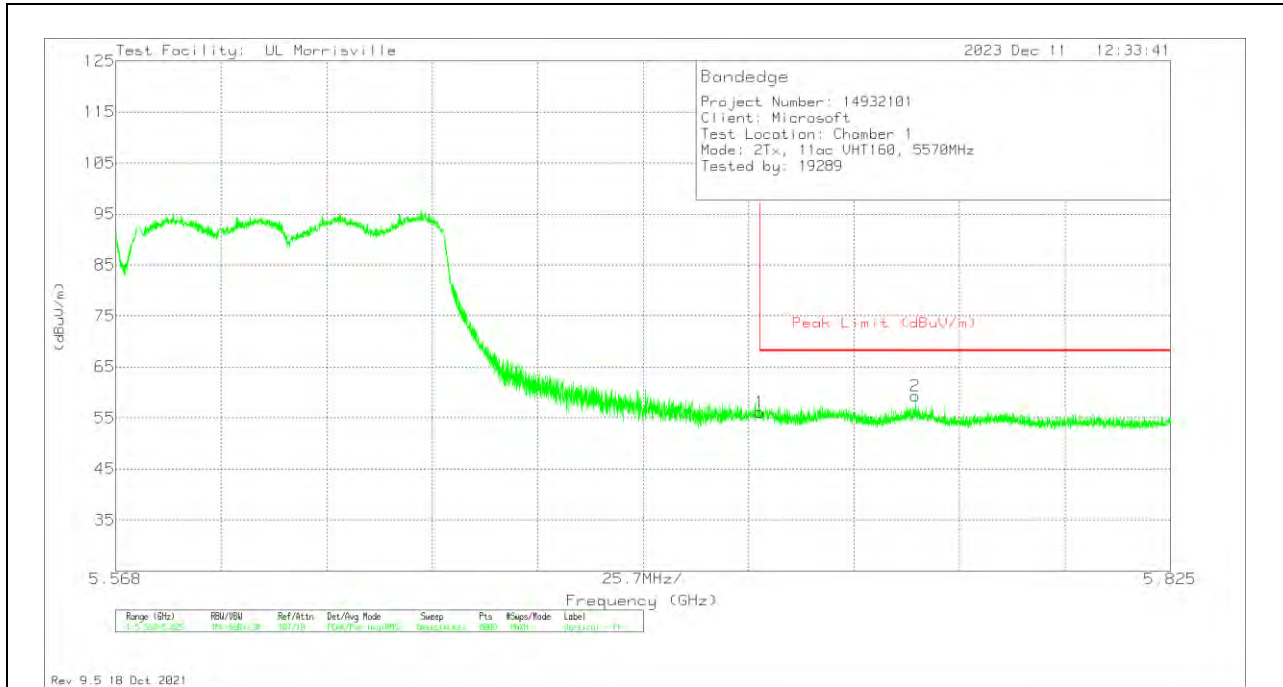

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	34.6	Pk	34.5	-23	10	56.1	68.2	-12.1	2	249	V
2	5.76289	37.98	Pk	34.6	-23.2	10	59.38	68.2	-8.82	2	249	V


Pk - Peak detector

10.1.22. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE 5.6 GHz BAND

2TX CDD MODE – 26T

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

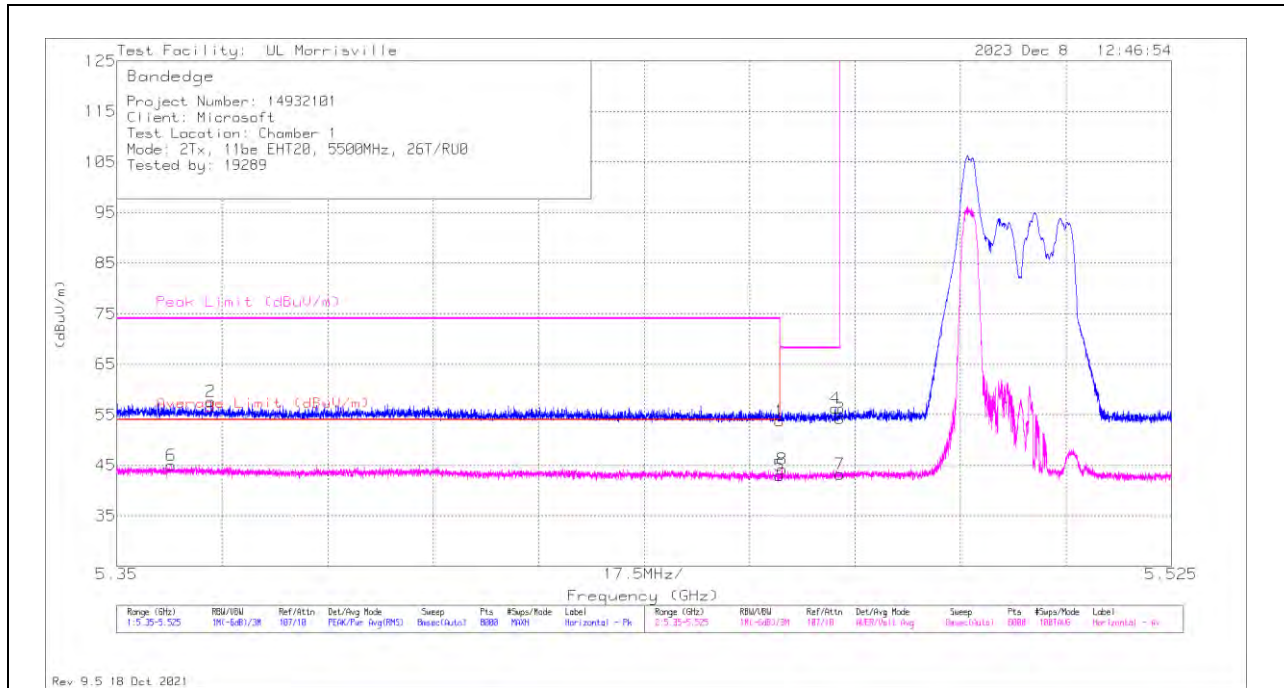

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20G211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.65	Pk	34.4	-23.3	10	53.75	-	-	74	-20.25	265	293	H
2	* ** 5.3656	35.9	Pk	34.5	-22.8	10	57.6	-	-	74	-16.4	265	293	H
5	* ** 5.45998	21.82	ADV	34.4	-23.3	10	42.92	54	-11.08	-	-	265	293	H
6	* ** 5.35906	23.13	ADV	34.5	-22.7	10	44.93	54	-9.07	-	-	265	293	H
8	5.4604	23.07	ADV	34.4	-23.3	10	44.17	-	-	-	-	265	293	H
4	5.46924	35.05	Pk	34.4	-23.2	10	56.25	-	-	68.2	-11.95	265	293	H
3	5.46998	33.07	Pk	34.4	-23.2	10	54.27	-	-	68.2	-13.93	265	293	H
7	5.46998	22.07	ADV	34.4	-23.2	10	43.27	-	-	-	-	265	293	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

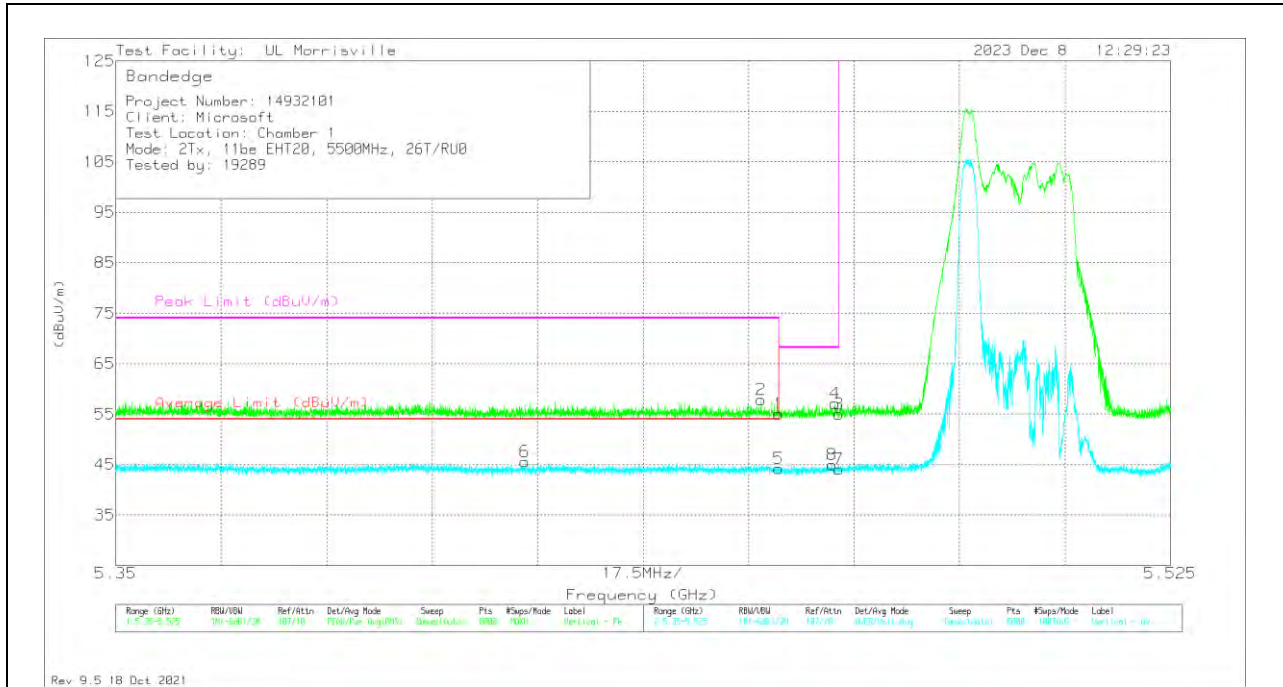


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.86	Pk	34.4	-23.3	10	54.96	-	-	74	-19.04	6	238	V
2	* ** 5.45709	36.72	Pk	34.4	-23.3	10	57.82	-	-	74	-16.18	6	238	V
5	* ** 5.45998	23.06	ADV	34.4	-23.3	10	44.16	54	-9.84	-	-	6	238	V
6	* ** 5.41787	24.17	ADV	34.5	-23.1	10	45.57	54	-8.43	-	-	6	238	V
8	5.4688	23.86	ADV	34.4	-23.3	10	44.96	-	-	-	-	6	238	V
4	5.46932	35.9	Pk	34.4	-23.2	10	57.1	-	-	68.2	-11.1	6	238	V
3	5.46998	33.82	Pk	34.4	-23.2	10	55.02	-	-	68.2	-13.18	6	238	V
7	5.46998	22.88	ADV	34.4	-23.2	10	44.08	-	-	-	-	6	238	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

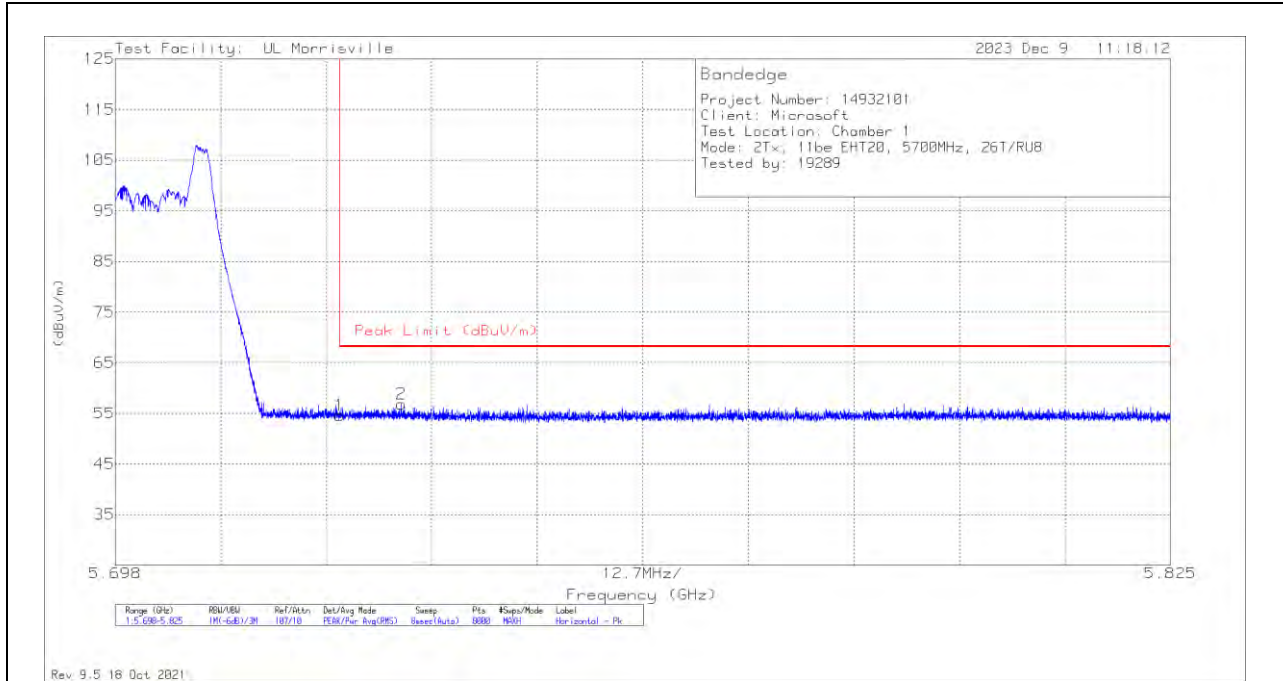

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.16	Pk	34.5	-23	10	54.66	68.2	-13.54	40	390	H
2	5.73242	35.35	Pk	34.5	-22.9	9.9	56.85	68.2	-11.35	40	390	H

Pk - Peak detector

VERTICAL RESULT

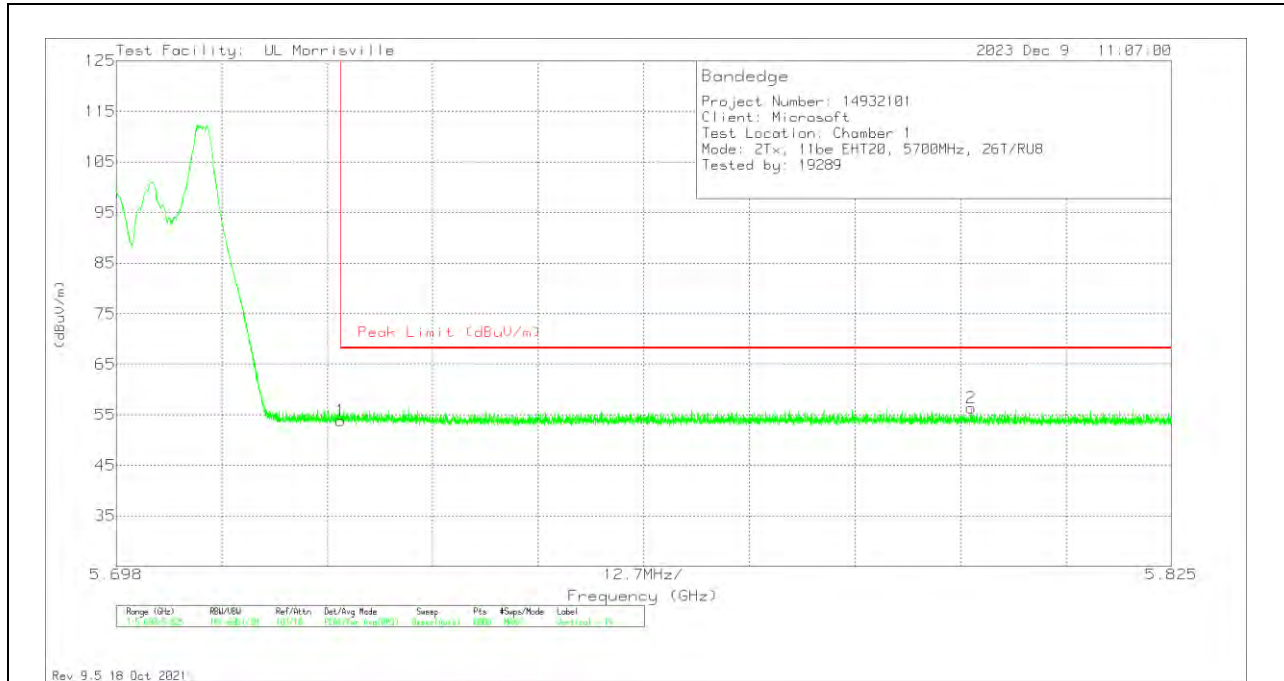


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	32.39	Pk	34.5	-23	10	53.89	68.2	-14.31	329	215	V
2	5.80091	34.7	Pk	34.7	-23	10	56.4	68.2	-11.8	329	215	V

Pk - Peak detector

2TX CDD MODE – 52T

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

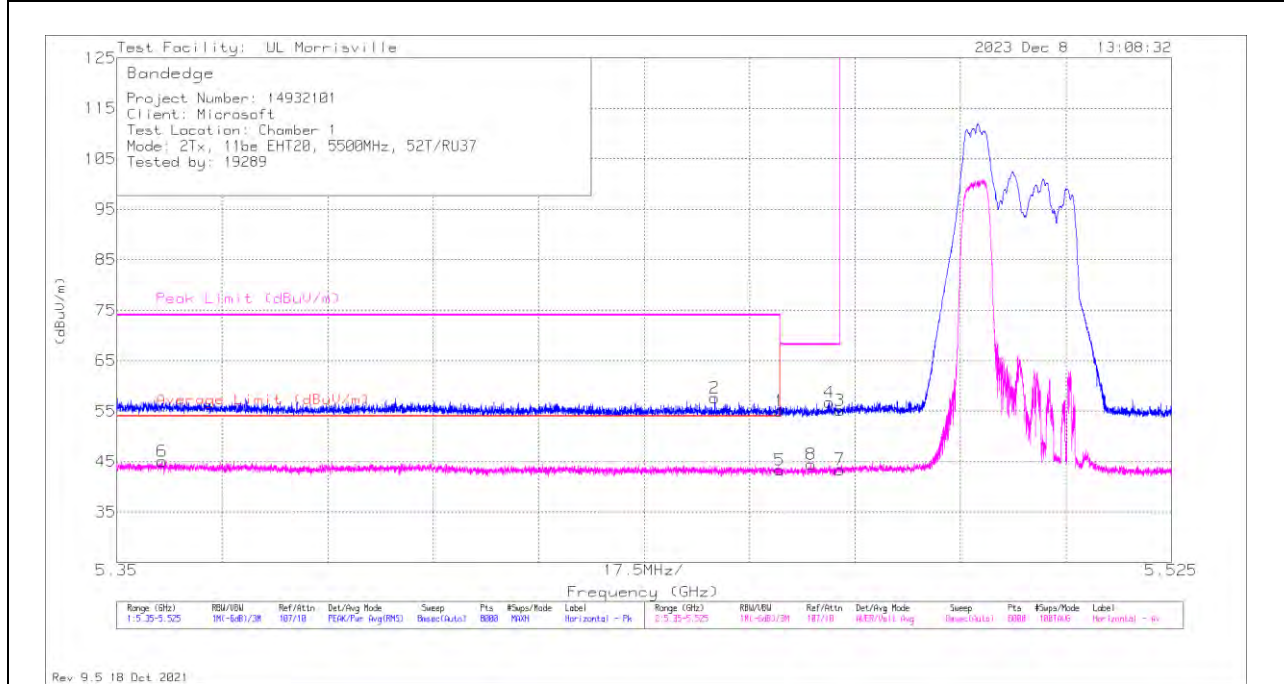

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	33.96	Pk	34.4	-23.3	10	55.06	-	-	74	-18.94	34	306	H
2	*** 5.44924	36.4	Pk	34.4	-23.2	10	57.6	-	-	74	-16.4	34	306	H
5	*** 5.45998	22.27	ADV	34.4	-23.3	10	43.37	54	-10.63	-	-	34	306	H
6	*** 5.35753	23.32	ADV	34.5	-22.7	10	45.12	54	-8.88	-	-	34	306	H
8	5.46523	23.45	ADV	34.4	-23.4	10	44.45	-	-	-	-	34	306	H
4	5.46819	35.6	Pk	34.4	-23.3	10	56.7	-	-	68.2	-11.5	34	306	H
3	5.46998	33.94	Pk	34.4	-23.2	10	55.14	-	-	68.2	-13.06	34	306	H
7	5.46998	22.2	ADV	34.4	-23.2	10	43.4	-	-	-	-	34	306	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

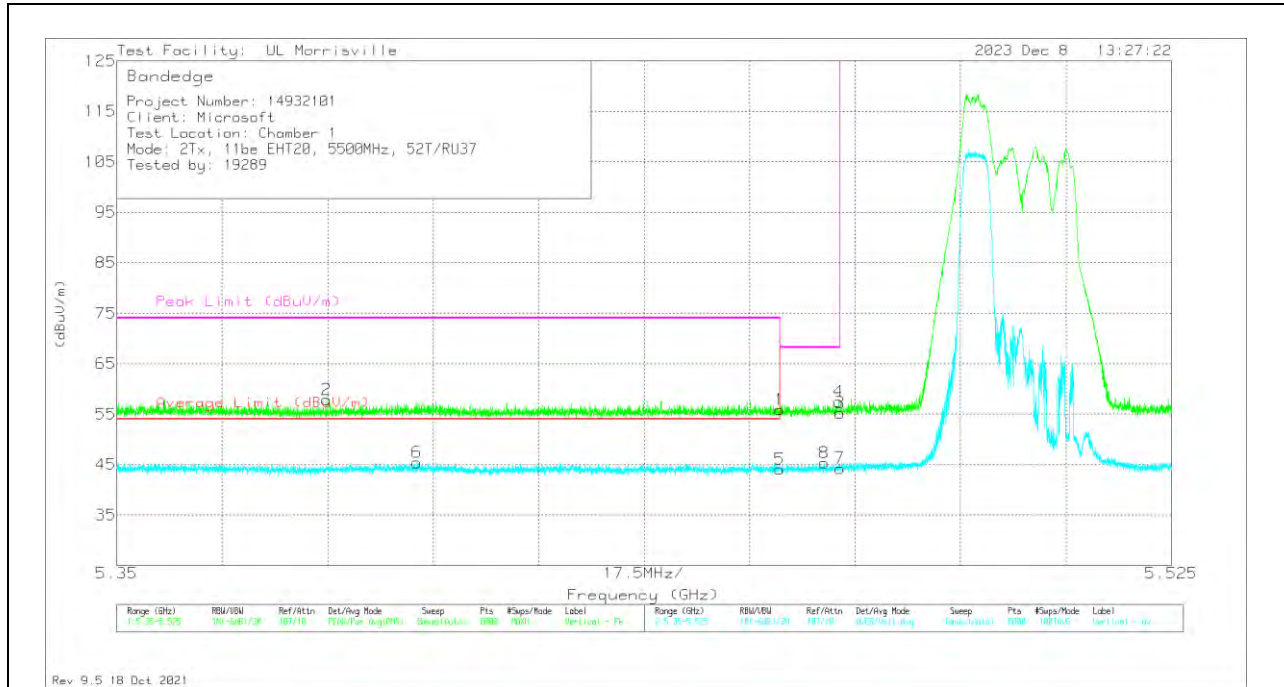


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	34.75	Pk	34.4	-23.3	10	55.85	-	-	74	-18.15	344	199	V
2	*** 5.38483	36.52	Pk	34.5	-23.1	10	57.92	-	-	74	-16.08	344	199	V
5	*** 5.45998	23	ADV	34.4	-23.3	10	44.1	54	-9.9	-	-	344	199	V
6	*** 5.39977	23.79	ADV	34.5	-22.9	10	45.39	54	-8.61	-	-	344	199	V
8	5.46742	24.17	ADV	34.4	-23.3	10	45.27	-	-	-	-	344	199	V
4	5.46978	36.24	Pk	34.4	-23.2	10	57.44	-	-	68.2	-10.76	344	199	V
3	5.46998	34	Pk	34.4	-23.2	10	55.2	-	-	68.2	-13	344	199	V
7	5.46998	23.07	ADV	34.4	-23.2	10	44.27	-	-	-	-	344	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

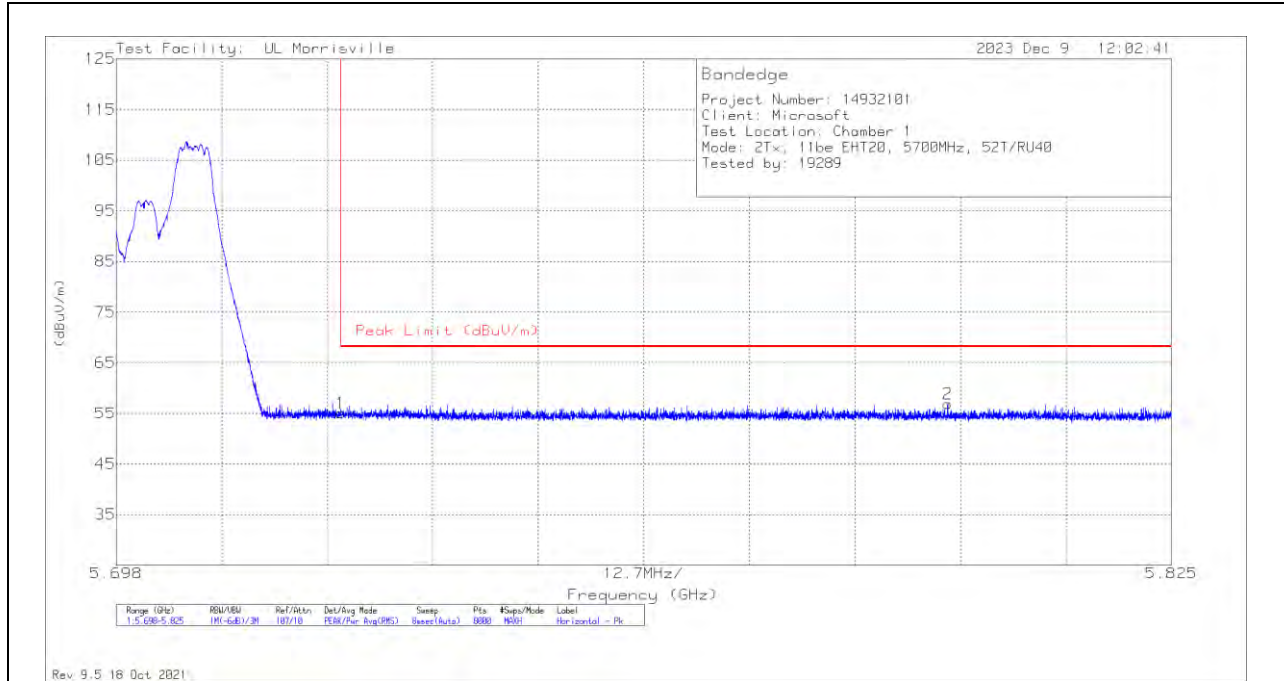

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.55	Pk	34.5	-23	10	55.05	68.2	-13.15	272	296	H
2	5.79807	35.21	Pk	34.7	-23	10	56.91	68.2	-11.29	272	296	H

Pk - Peak detector

VERTICAL RESULT

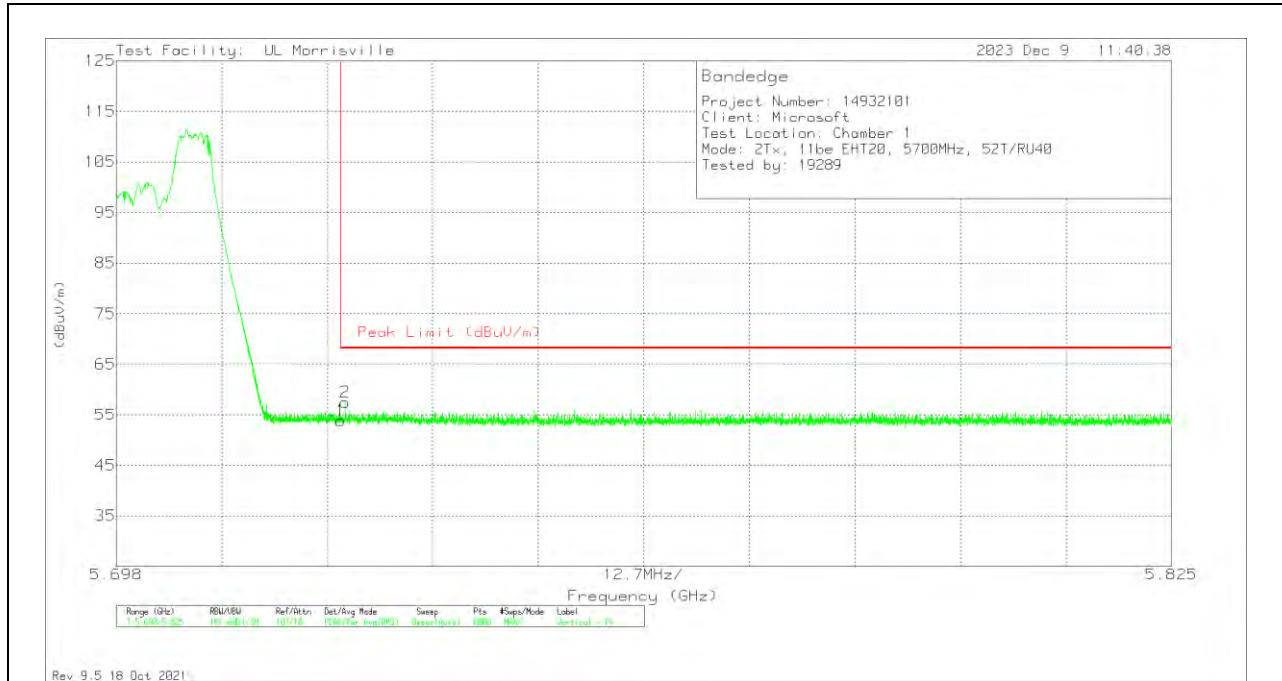


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	32.39	Pk	34.5	-23	10	53.89	68.2	-14.31	351	270	V
2	5.72555	35.98	Pk	34.5	-23	10	57.48	68.2	-10.72	351	270	V

Pk - Peak detector

2TX CDD MODE – 52T+26T

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

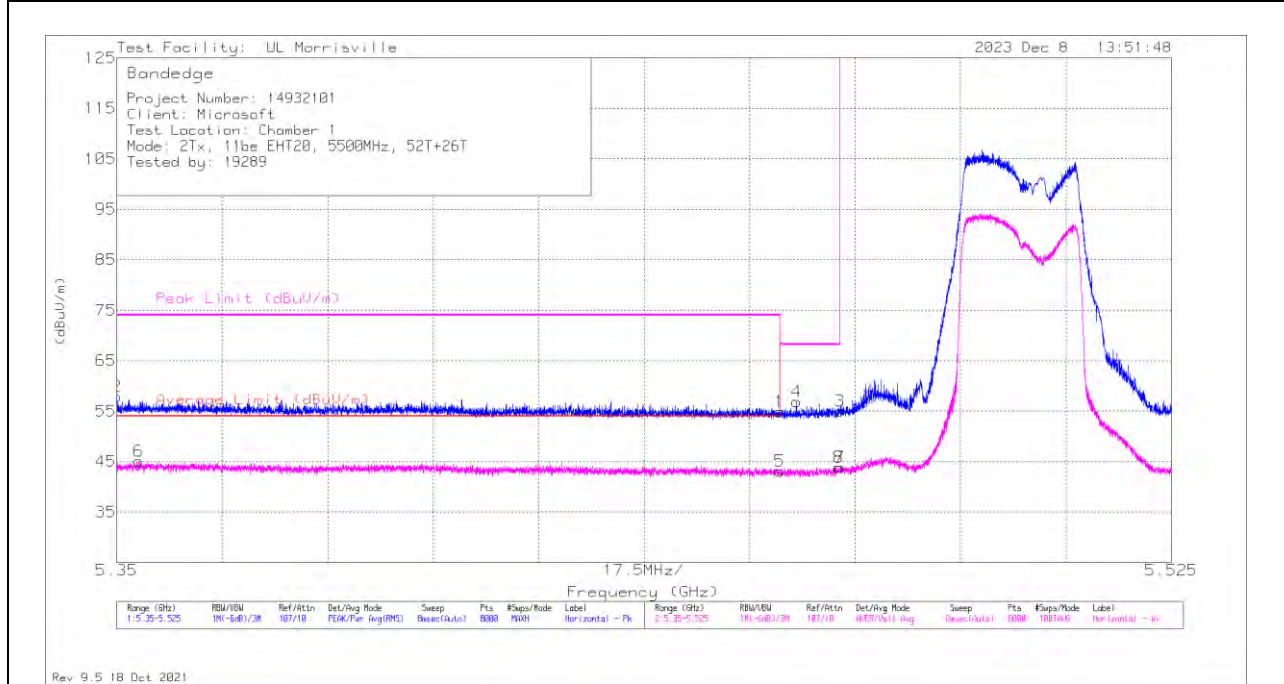

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	33.78	Pk	34.4	-23.3	10	54.88	-	-	74	-19.12	35	302	H
2	*** 5.35002	36.03	Pk	34.5	-22.7	10	57.83	-	-	74	-16.17	35	302	H
5	*** 5.45998	21.98	ADV	34.4	-23.3	10	43.08	54	-10.92	-	-	35	302	H
6	*** 5.35359	23.22	ADV	34.5	-22.7	10	45.02	54	-8.98	-	-	35	302	H
4	5.4628	35.87	Pk	34.4	-23.4	10	56.87	-	-	68.2	-11.33	35	302	H
8	5.46974	22.66	ADV	34.4	-23.2	10	43.86	-	-	-	-	35	302	H
3	5.46998	33.86	Pk	34.4	-23.2	10	55.06	-	-	68.2	-13.14	35	302	H
7	5.46998	22.61	ADV	34.4	-23.2	10	43.81	-	-	-	-	35	302	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

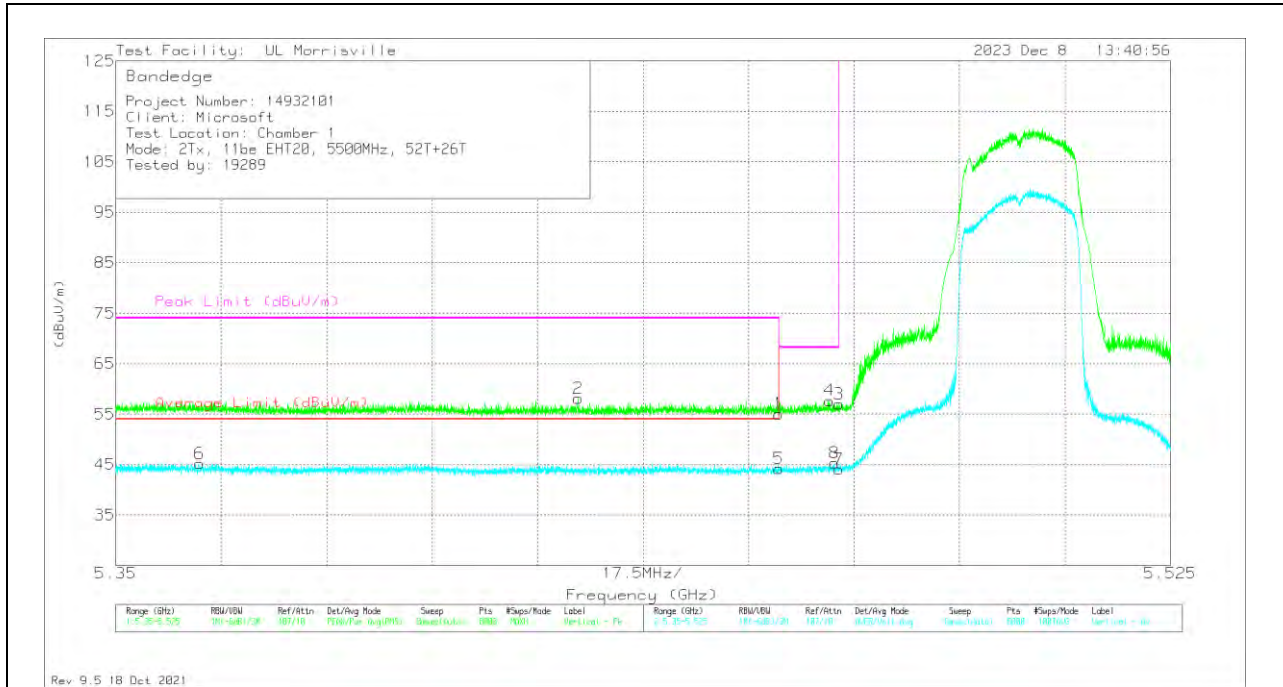


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.97	Pk	34.4	-23.3	10	55.07	-	-	74	-18.93	317	259	V
2	* ** 5.4267	36.67	Pk	34.5	-23	9.9	58.07	-	-	74	-15.93	317	259	V
5	* ** 5.45998	23.08	ADV	34.4	-23.3	10	44.18	54	-9.82	-	-	317	259	V
6	* ** 5.36394	23.5	ADV	34.5	-22.8	10	45.2	54	-8.8	-	-	317	259	V
4	5.46847	36.58	Pk	34.4	-23.3	10	57.68	-	-	68.2	-10.52	317	259	V
8	5.46924	24.18	ADV	34.4	-23.2	10	45.38	-	-	-	-	317	259	V
3	5.46998	35.78	Pk	34.4	-23.2	10	56.98	-	-	68.2	-11.22	317	259	V
7	5.46998	22.88	ADV	34.4	-23.2	10	44.08	-	-	-	-	317	259	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

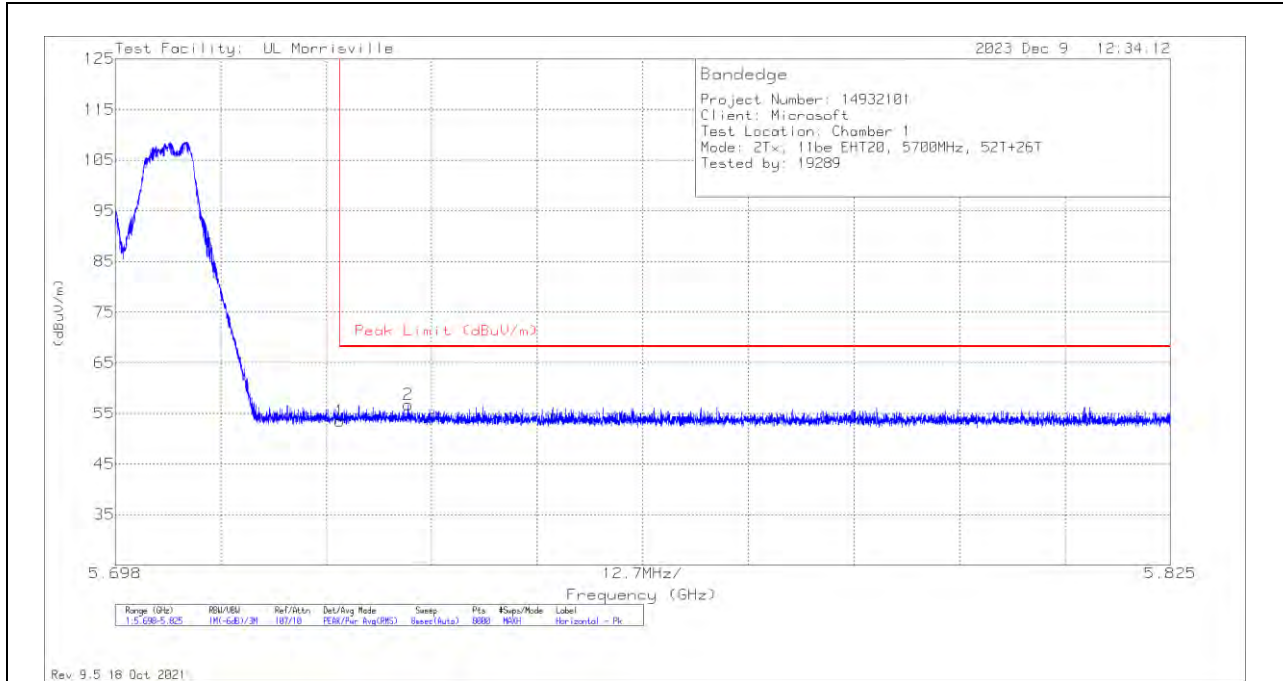

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	31.97	Pk	34.5	-23	10	53.47	68.2	-14.73	259	363	H
2	5.73325	35.34	Pk	34.5	-23	9.9	56.74	68.2	-11.46	259	363	H

Pk - Peak detector

VERTICAL RESULT

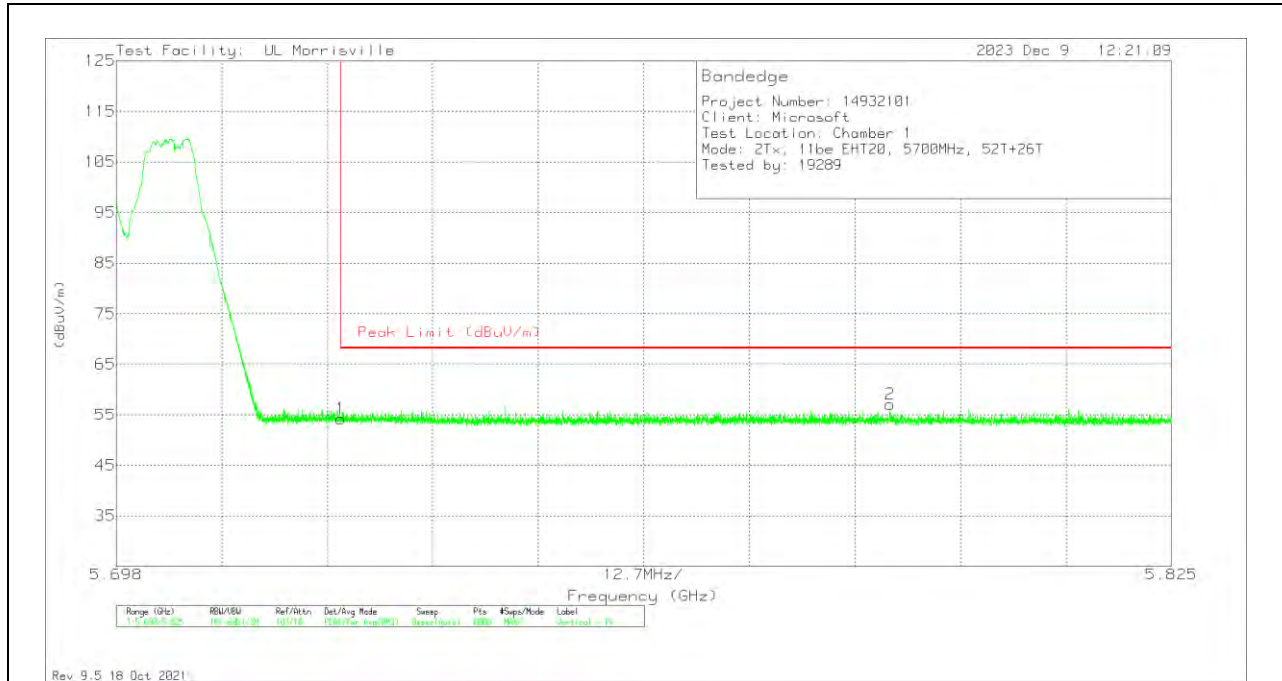


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	32.79	Pk	34.5	-23	10	54.29	68.2	-13.91	331	216	V
2	5.79117	35.39	Pk	34.7	-23	10	57.09	68.2	-11.11	331	216	V

Pk - Peak detector

2TX CDD MODE – 106T

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

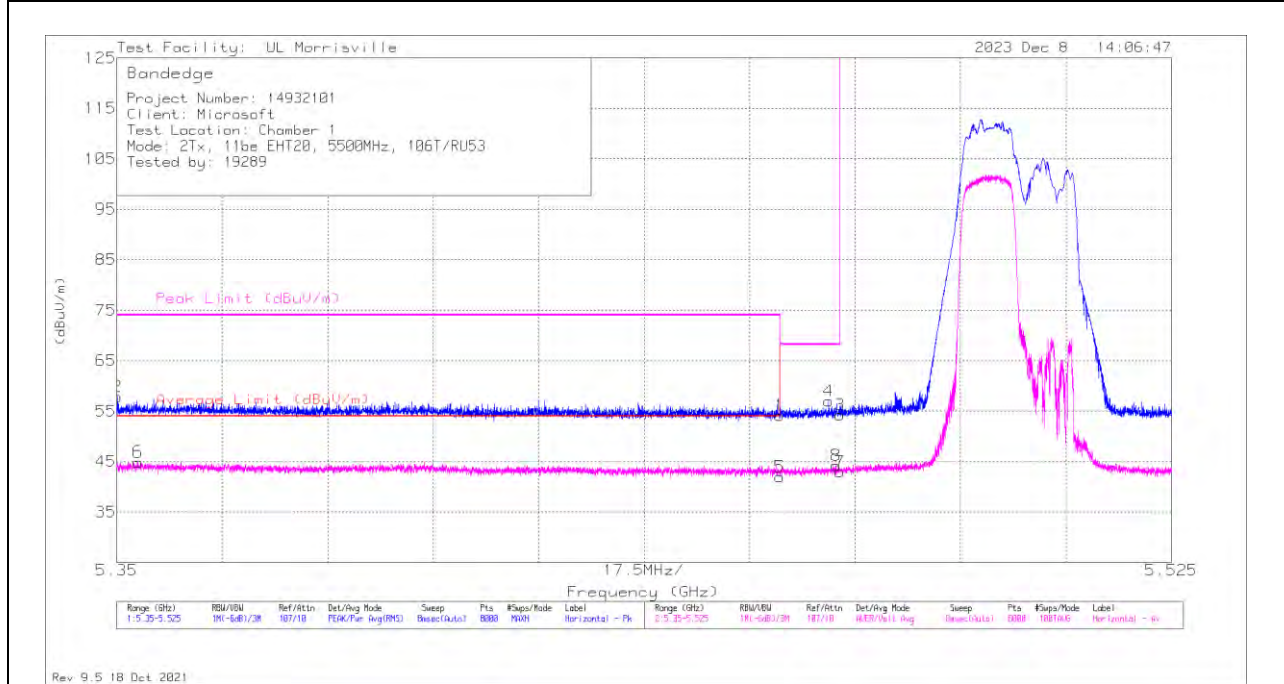

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	33.03	Pk	34.4	-23.3	10	54.13	-	-	74	-19.87	32	304	H
2	*** 5.35009	36.08	Pk	34.5	-22.7	10	57.88	-	-	74	-16.12	32	304	H
5	*** 5.45998	20.9	ADV	34.4	-23.3	10	42	54	-12	-	-	32	304	H
6	*** 5.35354	23.09	ADV	34.5	-22.7	10	44.89	54	-9.11	-	-	32	304	H
4	5.46816	35.95	Pk	34.4	-23.3	10	57.05	-	-	68.2	-11.15	32	304	H
8	5.46932	23.02	ADV	34.4	-23.2	10	44.22	-	-	-	-	32	304	H
3	5.46998	33.07	Pk	34.4	-23.2	10	54.27	-	-	68.2	-13.93	32	304	H
7	5.46998	21.76	ADV	34.4	-23.2	10	42.96	-	-	-	-	32	304	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

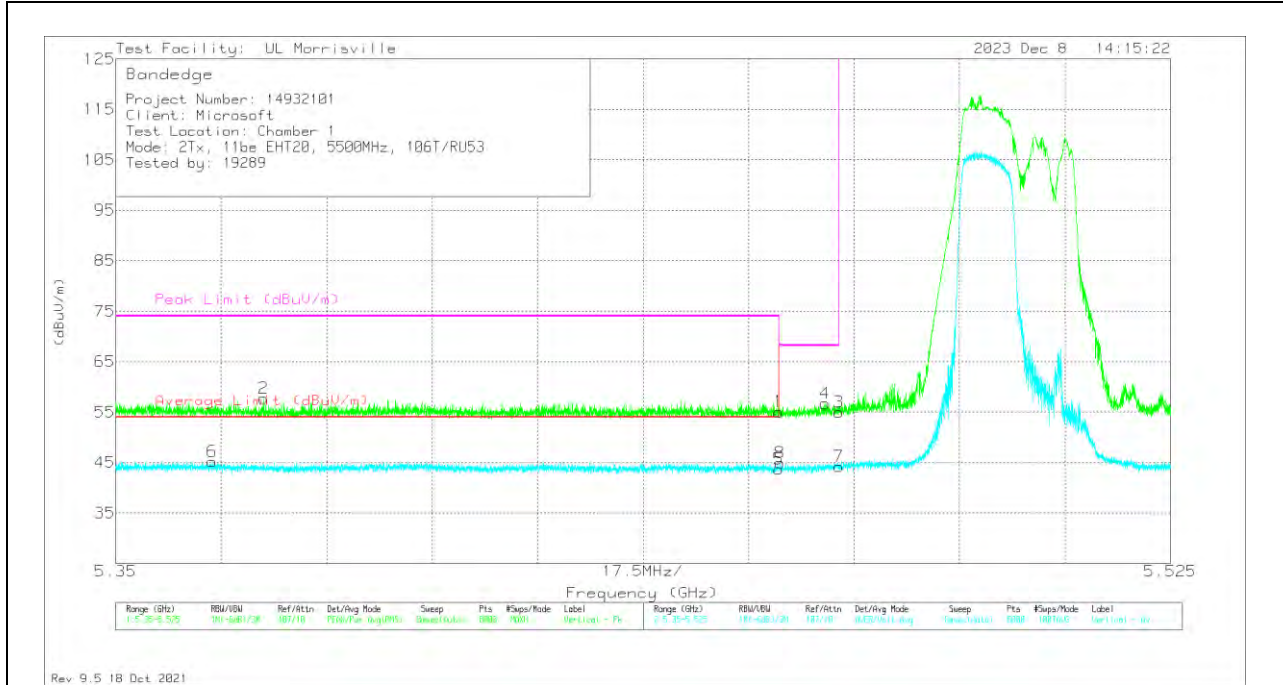

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.97	Pk	34.4	-23.3	10	55.07	-	-	74	-18.93	343	216	V
2	* ** 5.37455	36.33	Pk	34.5	-23.1	10	57.73	-	-	74	-16.27	343	216	V
5	* ** 5.45998	22.58	ADV	34.4	-23.3	10	43.68	54	-10.32	-	-	343	216	V
6	* ** 5.36604	23.46	ADV	34.5	-22.8	10	45.16	54	-8.84	-	-	343	216	V
8	5.4602	23.88	ADV	34.4	-23.3	10	44.98	-	-	-	-	343	216	V
4	5.46768	35.59	Pk	34.4	-23.3	10	56.69	-	-	68.2	-11.51	343	216	V
3	5.46998	33.81	Pk	34.4	-23.2	10	55.01	-	-	68.2	-13.19	343	216	V
7	5.46998	23	ADV	34.4	-23.2	10	44.2	-	-	-	-	343	216	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

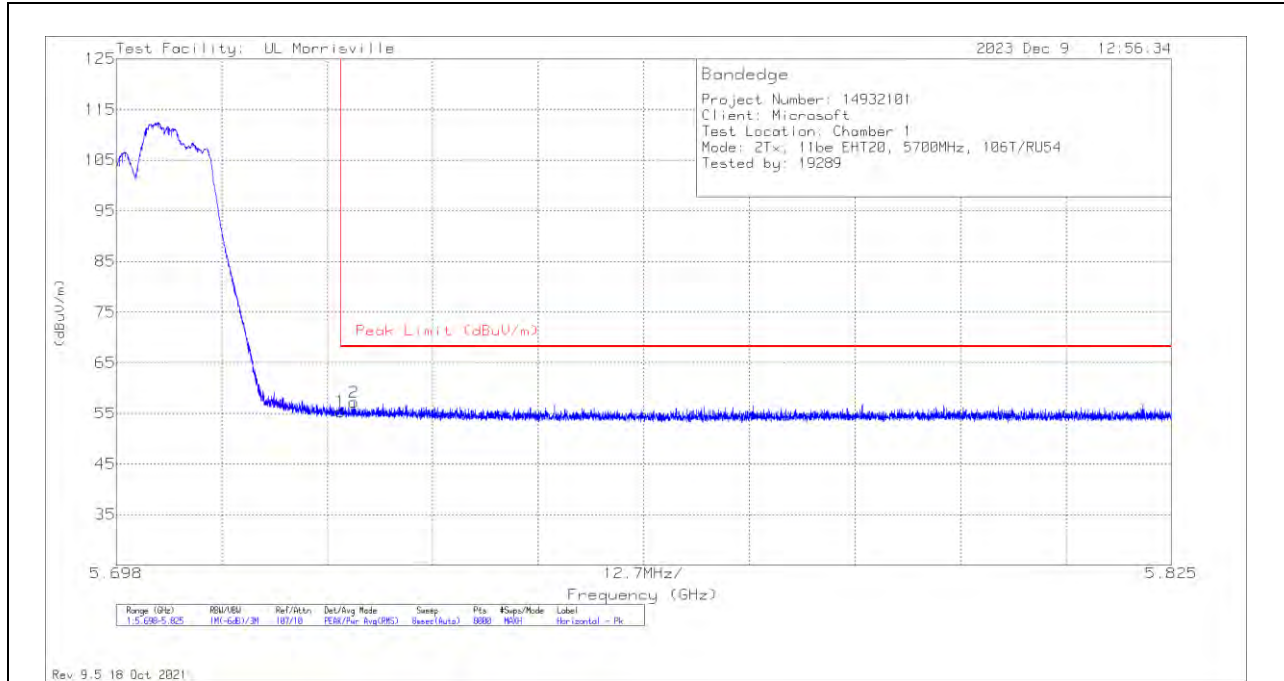

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.84	Pk	34.5	-23	10	55.34	68.2	-12.86	35	368	H
2	5.72659	35.58	Pk	34.5	-22.9	10	57.18	68.2	-11.02	35	368	H

Pk - Peak detector

VERTICAL RESULT

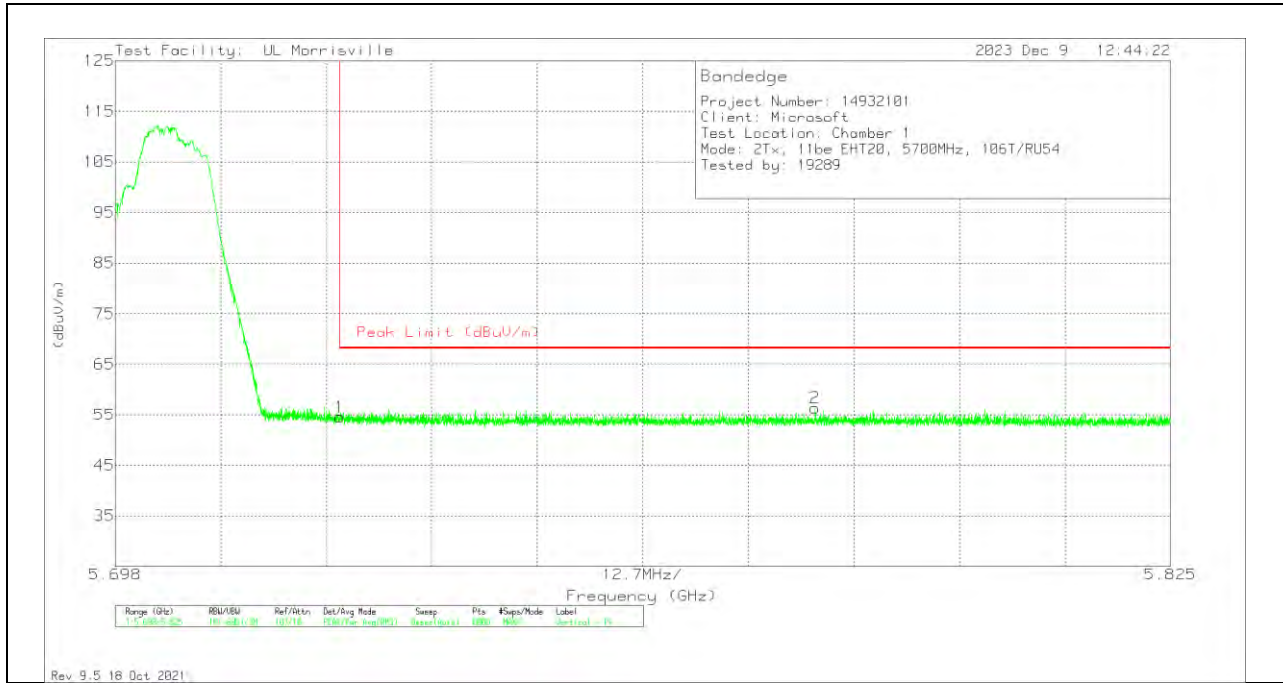


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.06	Pk	34.5	-23	10	54.56	68.2	-13.64	334	226	V
2	5.78224	34.64	Pk	34.7	-23	10	56.34	68.2	-11.86	334	226	V

Pk - Peak detector

2TX CDD MODE – 106T+26T

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

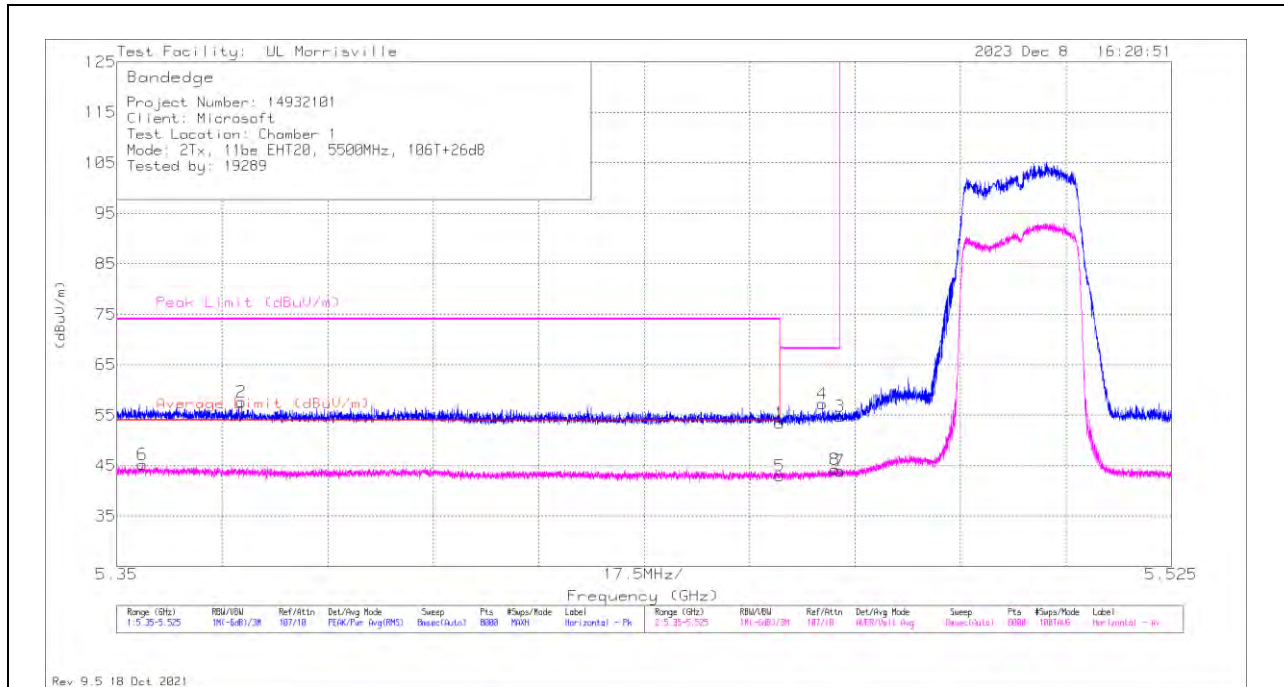

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	32.26	Pk	34.4	-23.3	10	53.36	-	-	74	-20.64	249	382	H
2	*** 5.37067	36.04	Pk	34.5	-22.9	10	57.64	-	-	74	-16.36	249	382	H
5	*** 5.45998	21.89	ADV	34.4	-23.3	10	42.99	54	-11.01	-	-	249	382	H
6	*** 5.35424	23.38	ADV	34.5	-22.7	10	45.18	54	-8.82	-	-	249	382	H
4	5.46705	36.15	Pk	34.4	-23.3	10	57.25	-	-	68.2	-10.95	249	382	H
8	5.46917	23.04	ADV	34.4	-23.2	10	44.24	-	-	-	-	249	382	H
3	5.46998	33.6	Pk	34.4	-23.2	10	54.8	-	-	68.2	-13.4	249	382	H
7	5.46998	22.74	ADV	34.4	-23.2	10	43.94	-	-	-	-	249	382	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

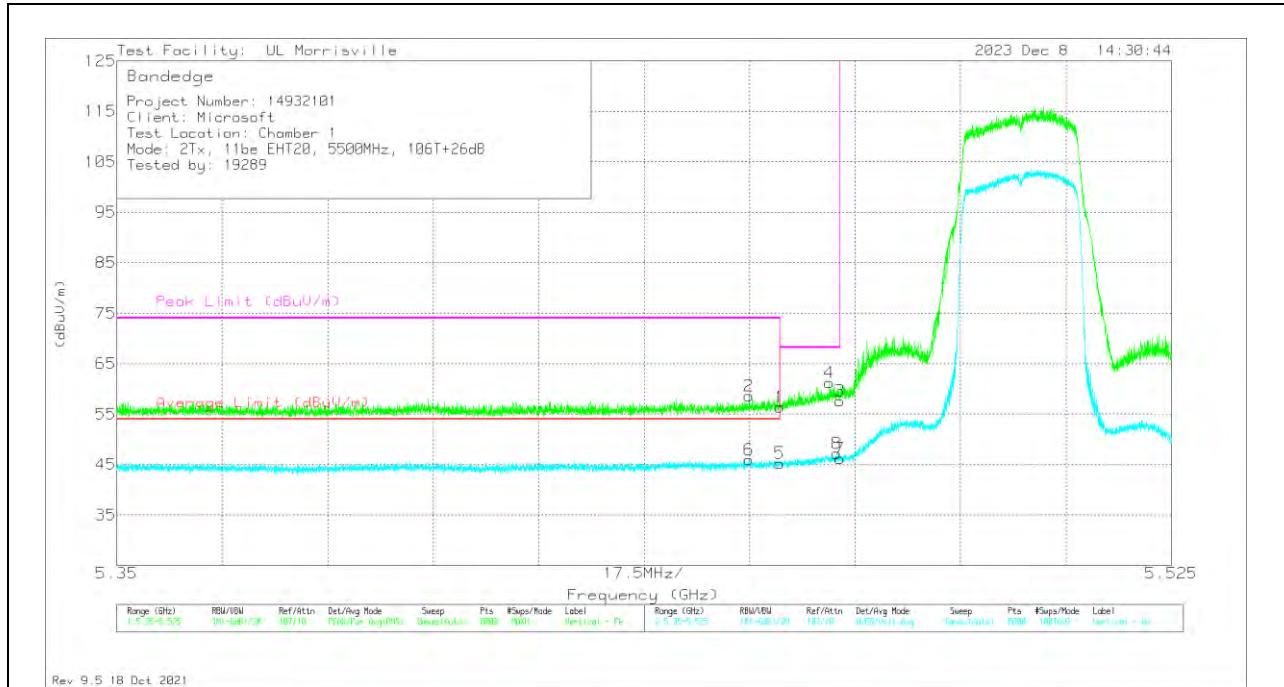


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	35.29	Pk	34.4	-23.3	10	56.39	-	-	74	-17.61	301	260	V
2	*** 5.45488	37.43	Pk	34.4	-23.2	10	58.63	-	-	74	-15.37	301	260	V
5	*** 5.45998	24.16	ADV	34.4	-23.3	10	45.26	54	-8.74	-	-	301	260	V
6	*** 5.45495	24.7	ADV	34.4	-23.2	10	45.9	54	-8.1	-	-	301	260	V
4	5.46823	40.08	Pk	34.4	-23.3	10	61.18	-	-	68.2	-7.02	301	260	V
8	5.46943	25.98	ADV	34.4	-23.2	10	47.18	-	-	-	-	301	260	V
3	5.46998	36.36	Pk	34.4	-23.2	10	57.56	-	-	68.2	-10.64	301	260	V
7	5.46998	24.94	ADV	34.4	-23.2	10	46.14	-	-	-	-	301	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

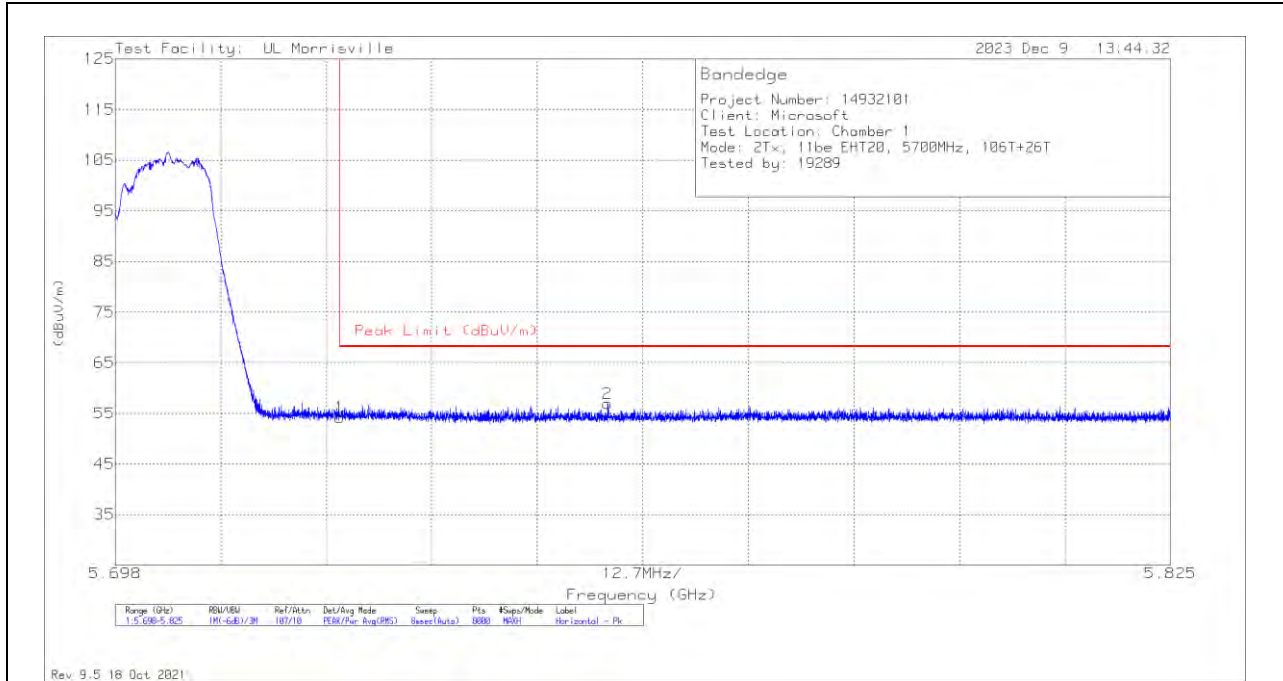

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	32.7	Pk	34.5	-23	10	54.2	68.2	-14	277	245	H
2	5.75728	35.54	Pk	34.6	-23.2	10	56.94	68.2	-11.26	277	245	H

Pk - Peak detector

VERTICAL RESULT

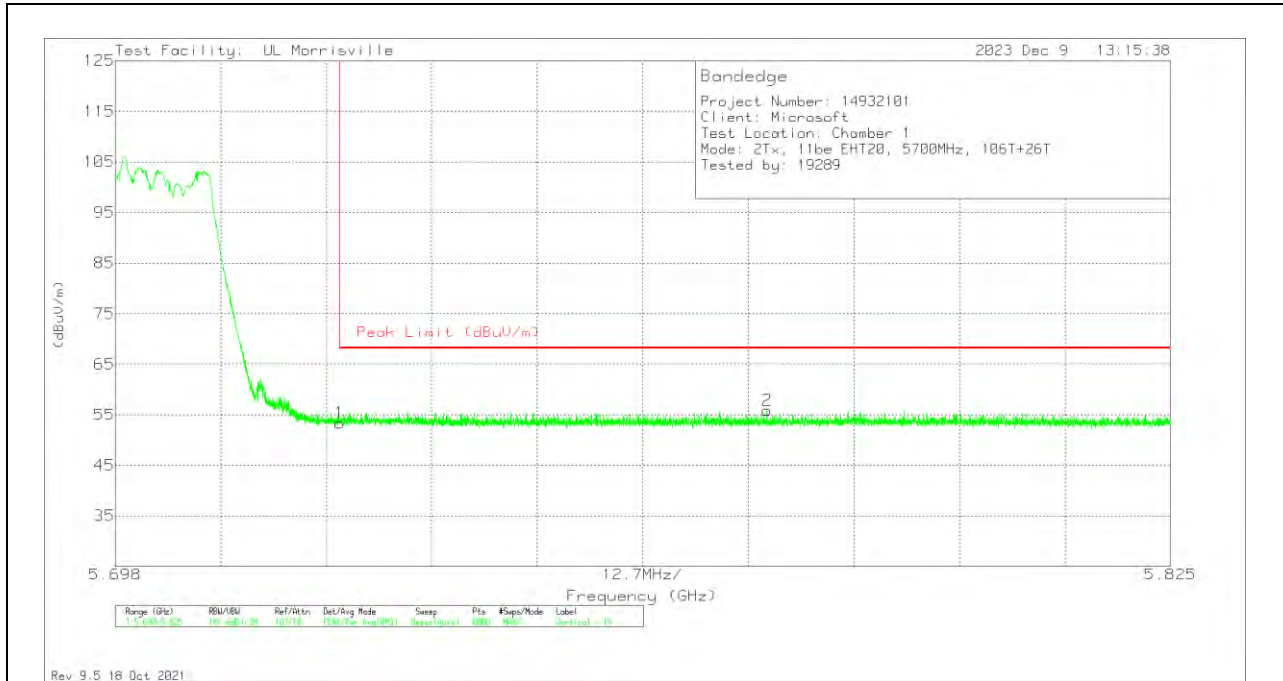


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	31.9	Pk	34.5	-23	10	53.4	68.2	-14.8	289	253	V
2	5.77645	34.34	Pk	34.6	-23.1	10	55.84	68.2	-12.36	289	253	V

Pk - Peak detector

2TX CDD MODE – 242T

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

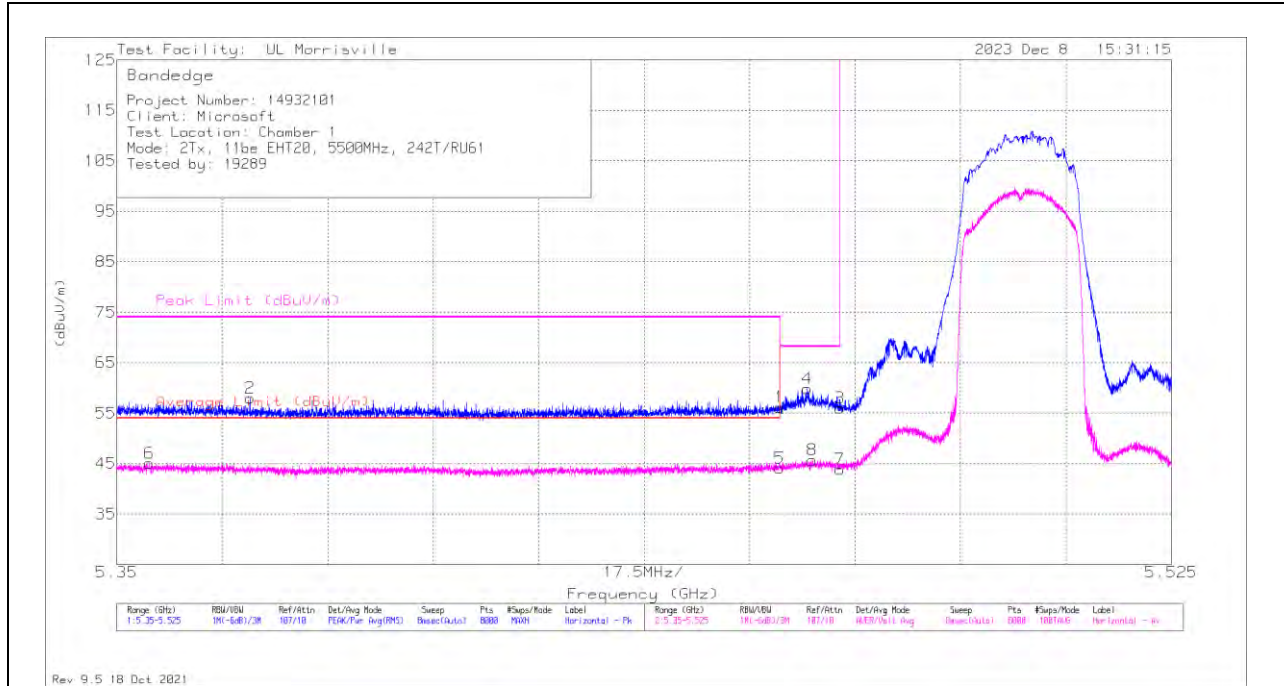

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	35.02	Pk	34.4	-23.3	10	56.12	-	-	74	-17.88	30	384	H
2	*** 5.3721	36.49	Pk	34.5	-23	10	57.99	-	-	74	-16.01	30	384	H
5	*** 5.45998	22.98	ADV	34.4	-23.3	10	44.08	54	-9.92	-	-	30	384	H
6	*** 5.35543	23.3	ADV	34.5	-22.7	10	45.1	54	-8.9	-	-	30	384	H
4	5.4646	38.85	Pk	34.4	-23.4	10	59.85	-	-	68.2	-8.35	30	384	H
8	5.46536	24.64	ADV	34.4	-23.4	10	45.64	-	-	-	-	30	384	H
3	5.46998	34.78	Pk	34.4	-23.2	10	55.98	-	-	68.2	-12.22	30	384	H
7	5.46998	22.69	ADV	34.4	-23.2	10	43.89	-	-	-	-	30	384	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

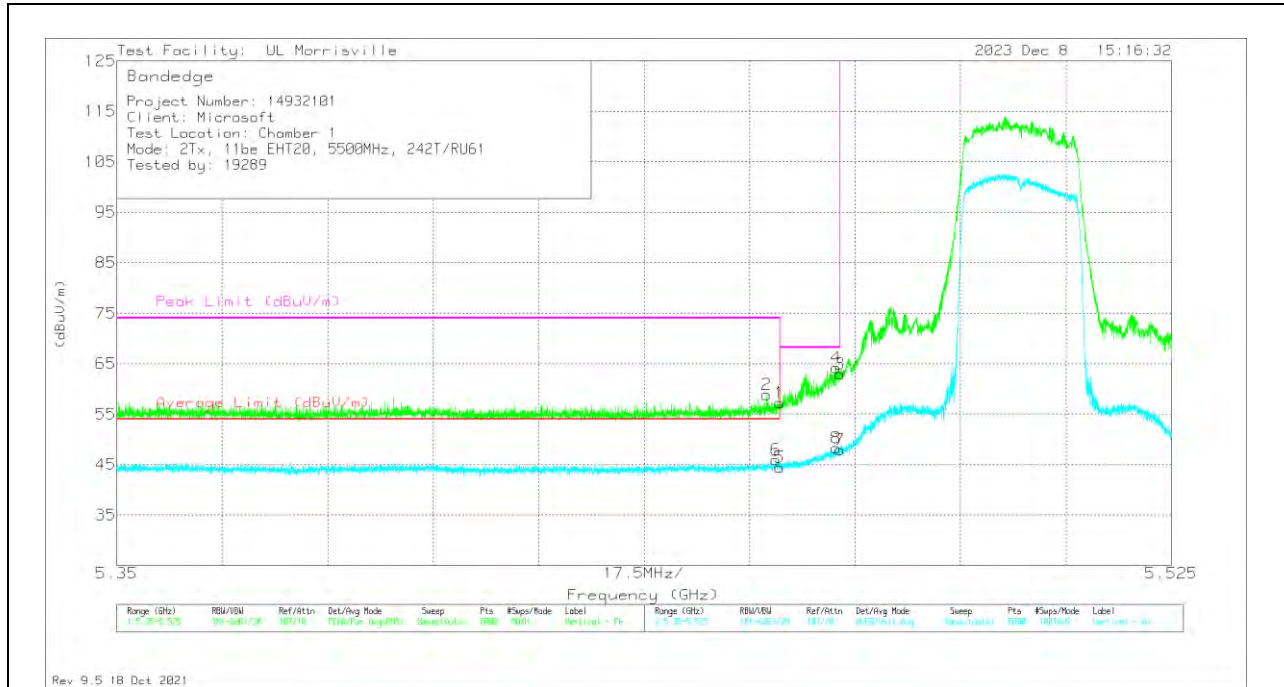


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	36.13	Pk	34.4	-23.3	10	57.23	-	-	74	-16.77	306	258	V
2	*** 5.45786	37.8	Pk	34.4	-23.3	10	58.9	-	-	74	-15.1	306	258	V
5	*** 5.45998	23.38	ADV	34.4	-23.3	10	44.48	54	-9.52	-	-	306	258	V
6	*** 5.45937	24.83	ADV	34.4	-23.3	10	45.93	54	-8.07	-	-	306	258	V
4	5.46932	42.95	Pk	34.4	-23.2	10	64.15	-	-	68.2	-4.05	306	258	V
8	5.46941	27.05	ADV	34.4	-23.2	10	48.25	-	-	-	-	306	258	V
3	5.46998	41.79	Pk	34.4	-23.2	10	62.99	-	-	68.2	-5.21	306	258	V
7	5.46998	26.72	ADV	34.4	-23.2	10	47.92	-	-	-	-	306	258	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

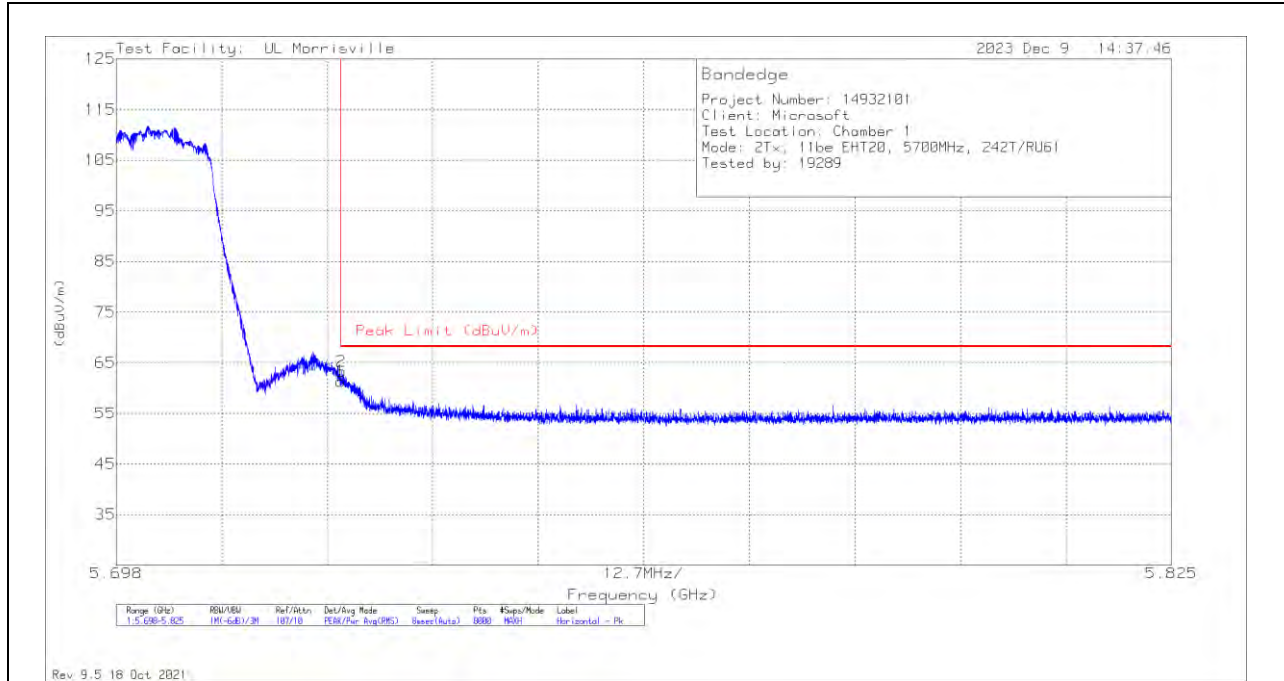

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.82	Pk	34.5	-23	10	61.32	68.2	-6.88	32	388	H
2	5.7251	41.78	Pk	34.5	-23	10	63.28	68.2	-4.92	32	388	H

Pk - Peak detector

VERTICAL RESULT

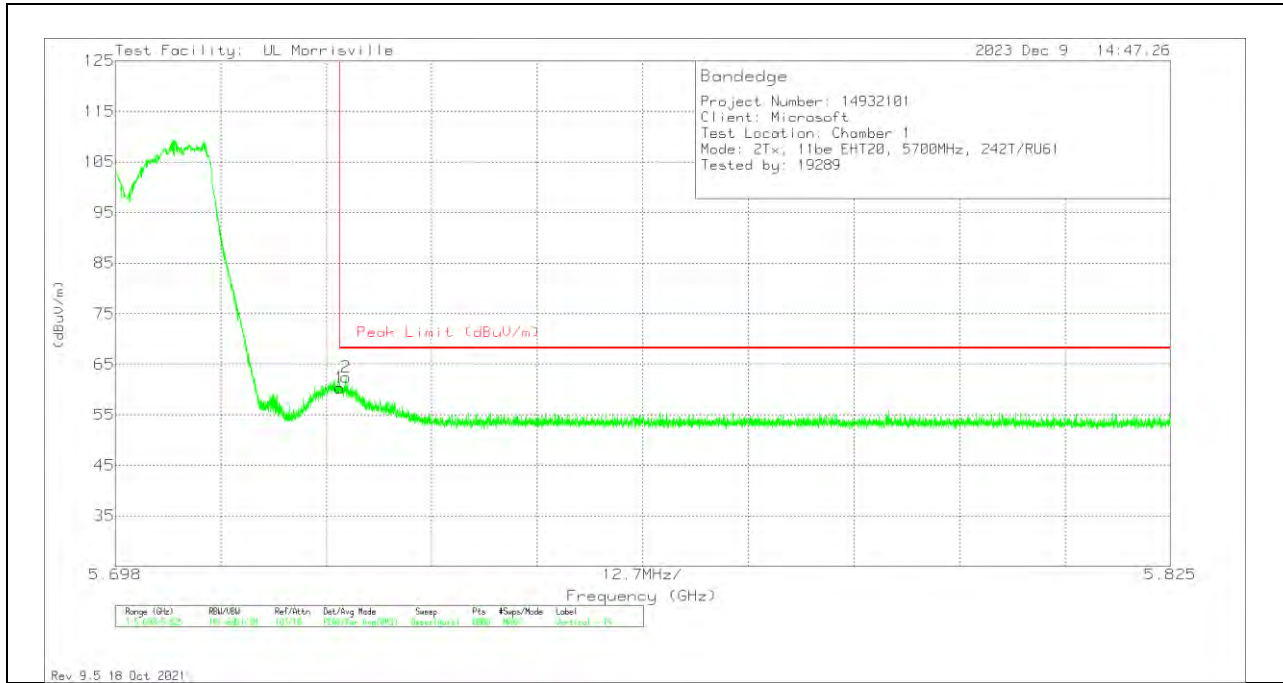

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	38.83	Pk	34.5	-23	10	60.33	68.2	-7.87	330	228	V
2	5.72578	40.92	Pk	34.5	-23	10	62.42	68.2	-5.78	330	228	V


Pk - Peak detector

10.1.23. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE 5.6 GHz BAND

2TX CDD MODE – 484T

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

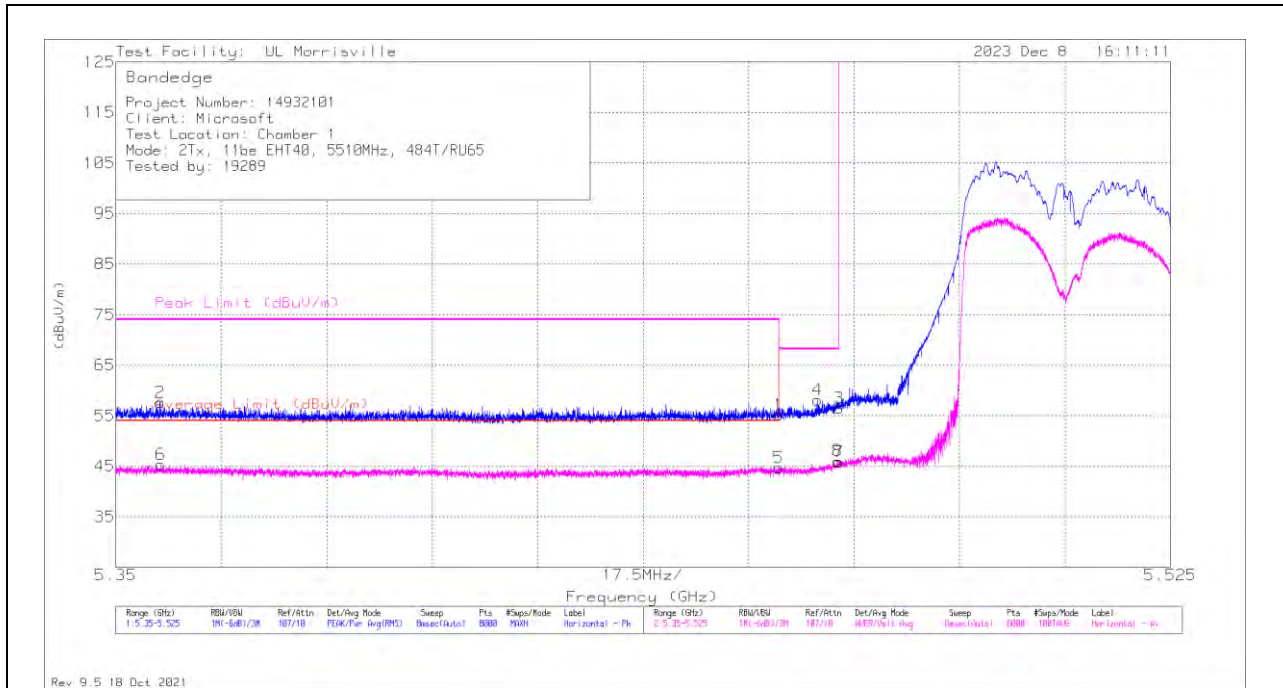

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	34.03	Pk	34.4	-23.3	10	55.13	-	-	74	-18.87	17	383	H
2	*** 5.35733	35.84	Pk	34.5	-22.7	10	57.64	-	-	74	-16.36	17	383	H
5	*** 5.45998	23.57	ADV	34.4	-23.3	10	44.67	54	-9.33	-	-	17	383	H
6	*** 5.35746	23.49	ADV	34.5	-22.7	10	45.29	54	-8.71	-	-	17	383	H
4	5.46648	37.07	Pk	34.4	-23.3	10	58.17	-	-	68.2	-10.03	17	383	H
8	5.46978	24.81	ADV	34.4	-23.2	10	46.01	-	-	-	-	17	383	H
3	5.46998	35.27	Pk	34.4	-23.2	10	56.47	-	-	68.2	-11.73	17	383	H
7	5.46998	24.61	ADV	34.4	-23.2	10	45.81	-	-	-	-	17	383	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

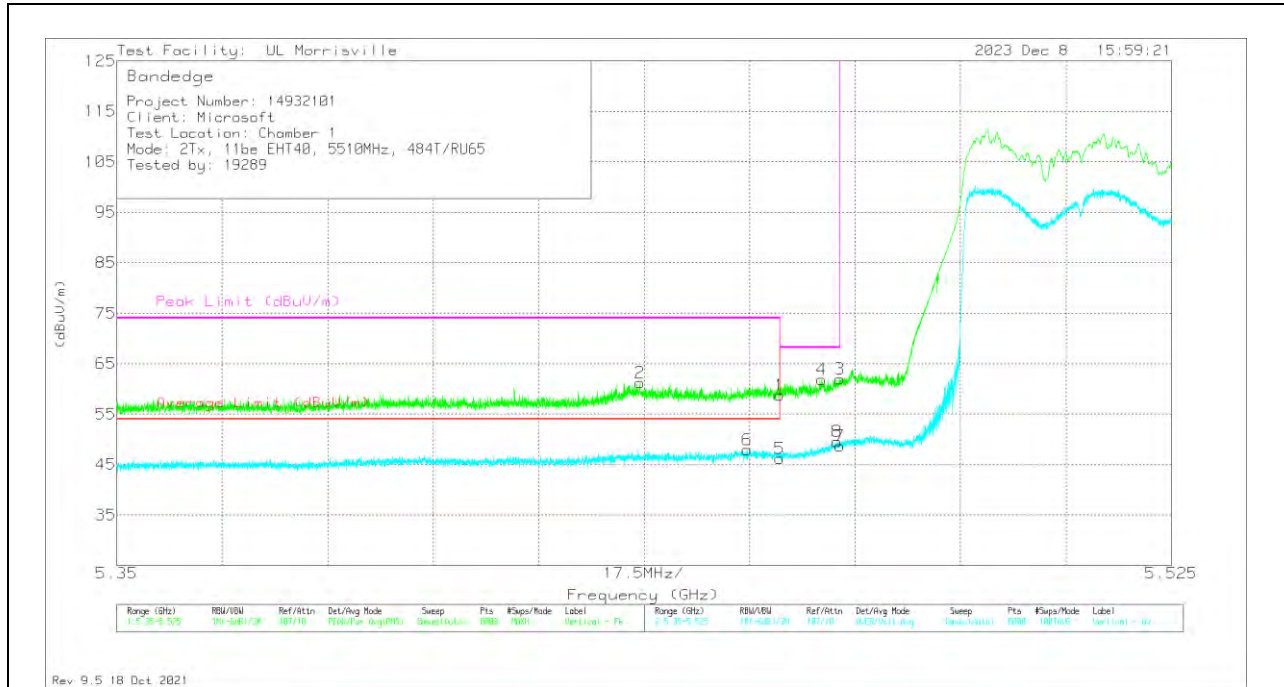


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	37.62	Pk	34.4	-23.3	10	58.72	-	-	74	-15.28	315	270	V
2	*** 5.43681	40.02	Pk	34.4	-23.2	10	61.22	-	-	74	-12.78	315	270	V
5	*** 5.45998	25.14	ADV	34.4	-23.3	10	46.24	54	-7.76	-	-	315	270	V
6	*** 5.4546	26.78	ADV	34.4	-23.2	10	47.98	54	-6.02	-	-	315	270	V
4	5.46698	40.79	Pk	34.4	-23.3	10	61.89	-	-	68.2	-6.31	315	270	V
8	5.46952	28.32	ADV	34.4	-23.2	10	49.52	-	-	-	-	315	270	V
3	5.46998	40.75	Pk	34.4	-23.2	10	61.95	-	-	68.2	-6.25	315	270	V
7	5.46998	27.45	ADV	34.4	-23.2	10	48.65	-	-	-	-	315	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

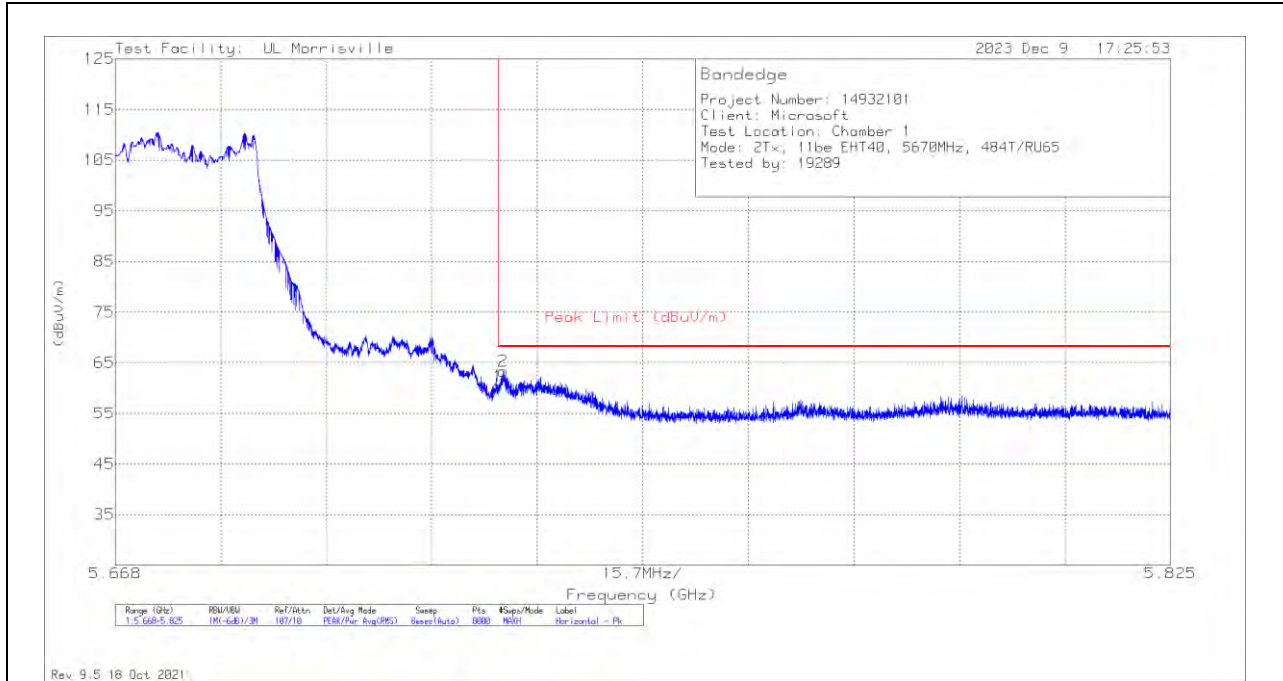

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	38.83	Pk	34.5	-23	10	60.33	68.2	-7.87	31	391	H
2	5.72572	41.82	Pk	34.5	-23	10	63.32	68.2	-4.88	31	391	H

Pk - Peak detector

VERTICAL RESULT

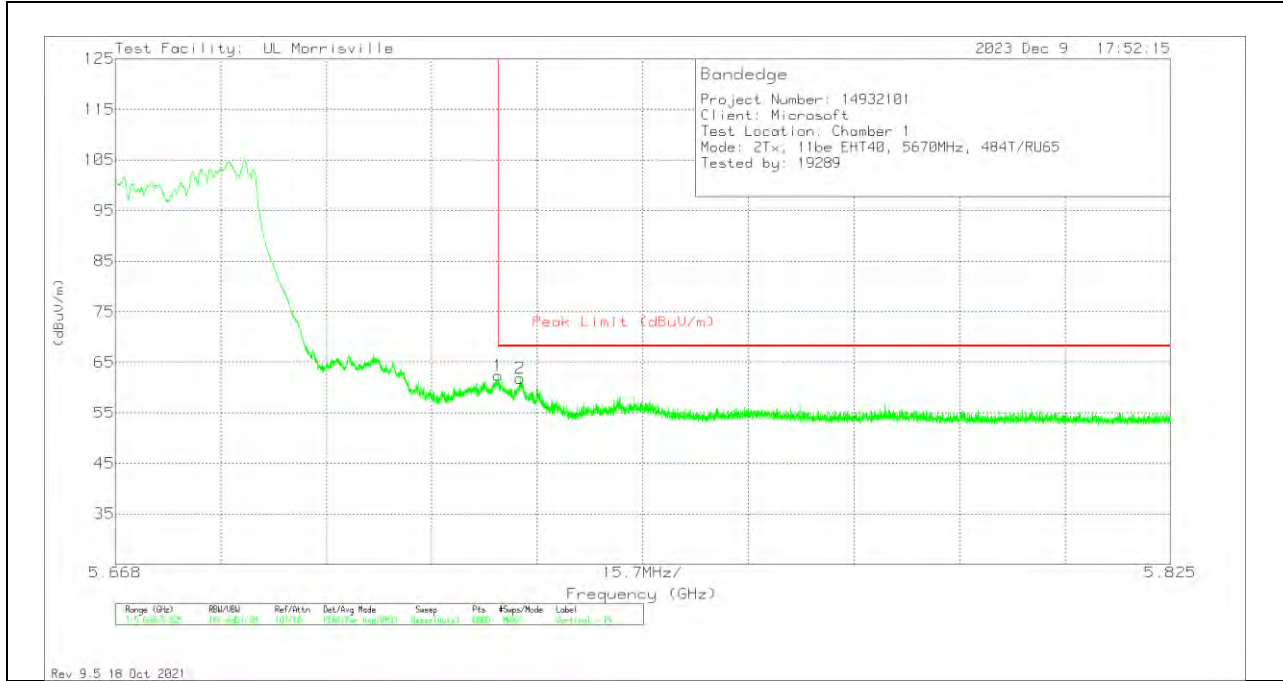

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	40.88	Pk	34.5	-23	10	62.38	68.2	-5.82	343	269	V
2	5.72822	40.23	Pk	34.5	-22.9	10	61.83	68.2	-6.37	343	269	V


Pk - Peak detector

10.1.24. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE 5.6 GHz BAND

2TX CDD MODE – 484T+242T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

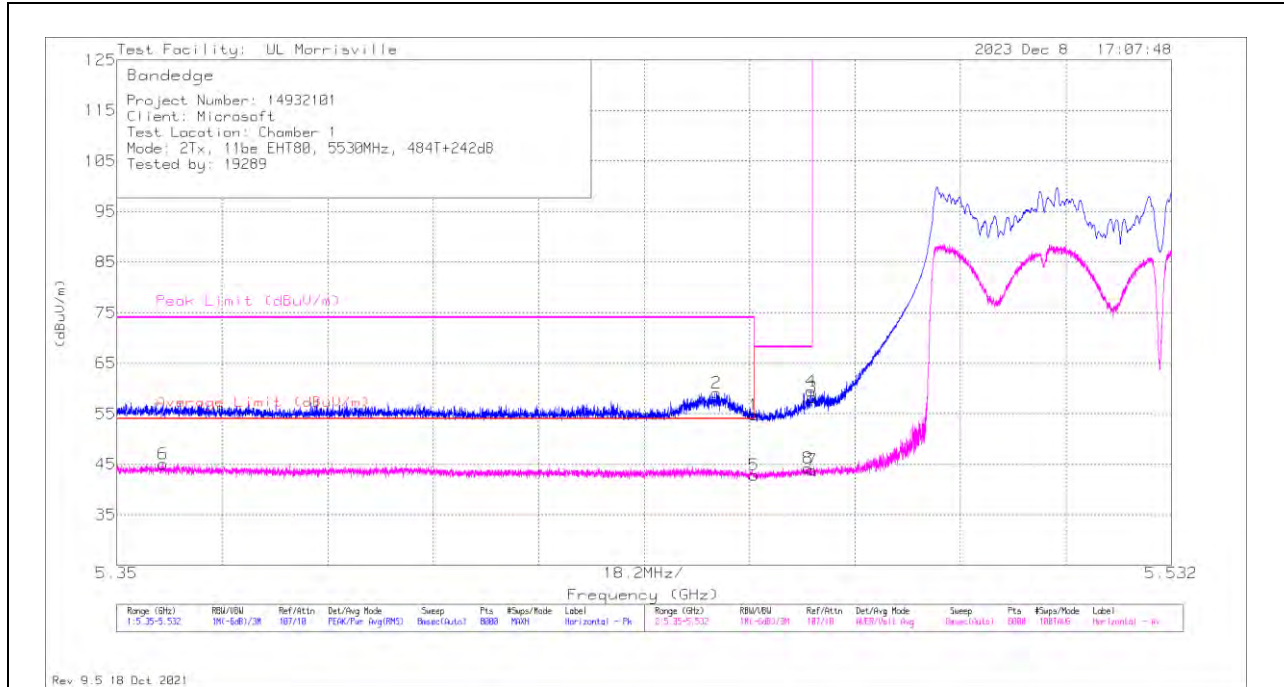

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	33.61	Pk	34.4	-23.3	10	54.71	-	-	74	-19.29	356	262	H
2	*** 5.45344	37.94	Pk	34.4	-23.2	10	59.14	-	-	74	-14.86	356	262	H
5	*** 5.45999	21.76	ADV	34.4	-23.3	10	42.86	54	-11.14	-	-	356	262	H
6	*** 5.35794	23.22	ADV	34.5	-22.7	10	45.02	54	-8.98	-	-	356	262	H
8	5.46923	23.04	ADV	34.4	-23.2	10	44.24	-	-	-	-	356	262	H
4	5.46982	38.26	Pk	34.4	-23.2	10	59.46	-	-	68.2	-8.74	356	262	H
3	5.47	37.07	Pk	34.4	-23.2	10	58.27	-	-	68.2	-9.93	356	262	H
7	5.47	22.64	ADV	34.4	-23.2	10	43.84	-	-	-	-	356	262	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

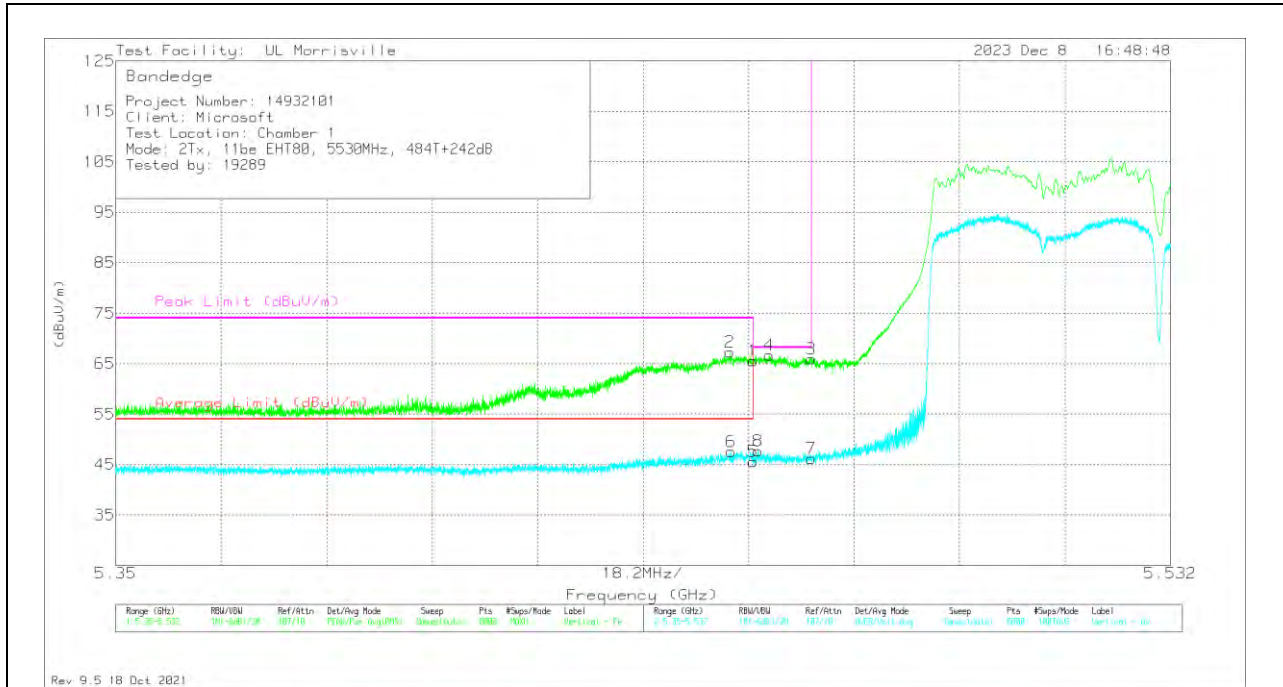


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	44.51	Pk	34.4	-23.3	10	65.61	-	-	74	-8.39	309	259	V
2	*** 5.45598	46.05	Pk	34.4	-23.2	10	67.25	-	-	74	-6.75	309	259	V
5	*** 5.45999	24.49	ADV	34.4	-23.3	10	45.59	54	-8.41	-	-	309	259	V
6	*** 5.45617	26.35	ADV	34.4	-23.2	10	47.55	54	-6.45	-	-	309	259	V
8	5.46085	26.63	ADV	34.4	-23.3	10	47.73	-	-	-	-	309	259	V
4	5.46279	45.7	Pk	34.4	-23.4	10	66.7	-	-	68.2	-1.5	309	259	V
3	5.47	44.74	Pk	34.4	-23.2	10	65.94	-	-	68.2	-2.26	309	259	V
7	5.47	25.04	ADV	34.4	-23.2	10	46.24	-	-	-	-	309	259	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

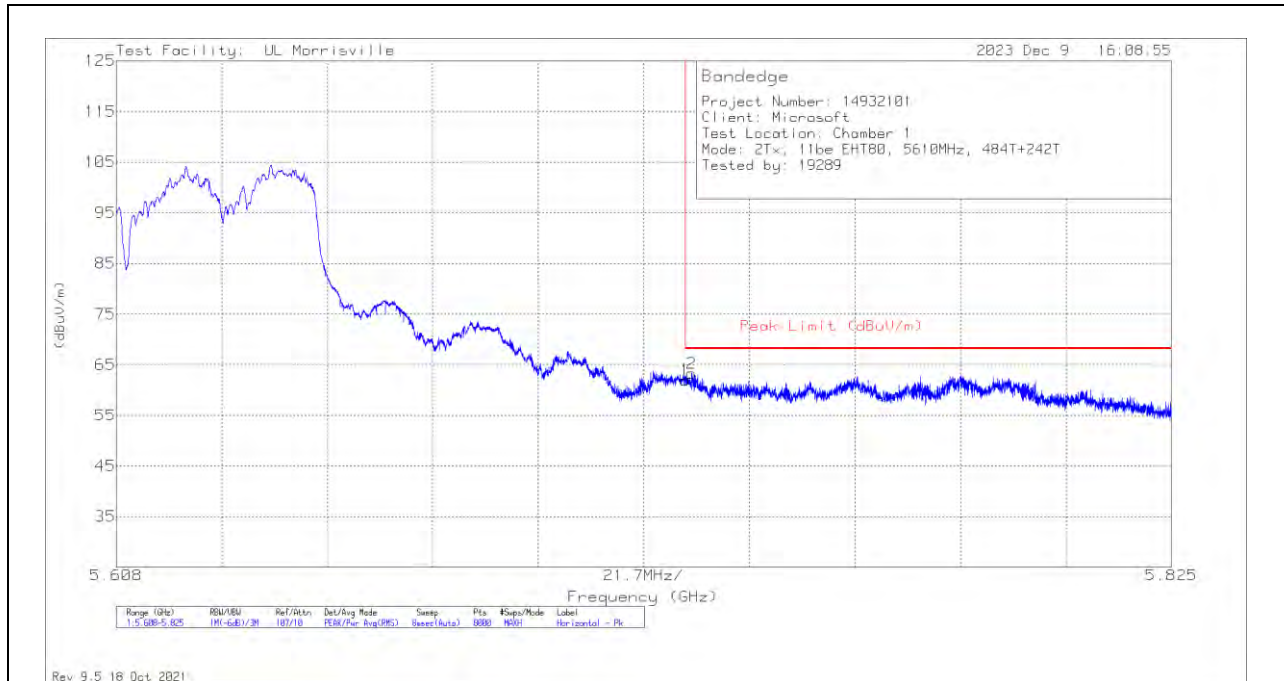

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.47	Pk	34.5	-23	10	61.97	68.2	-6.23	286	335	H
2	5.72636	41.67	Pk	34.5	-22.9	10	63.27	68.2	-4.93	286	335	H

Pk - Peak detector

VERTICAL RESULT

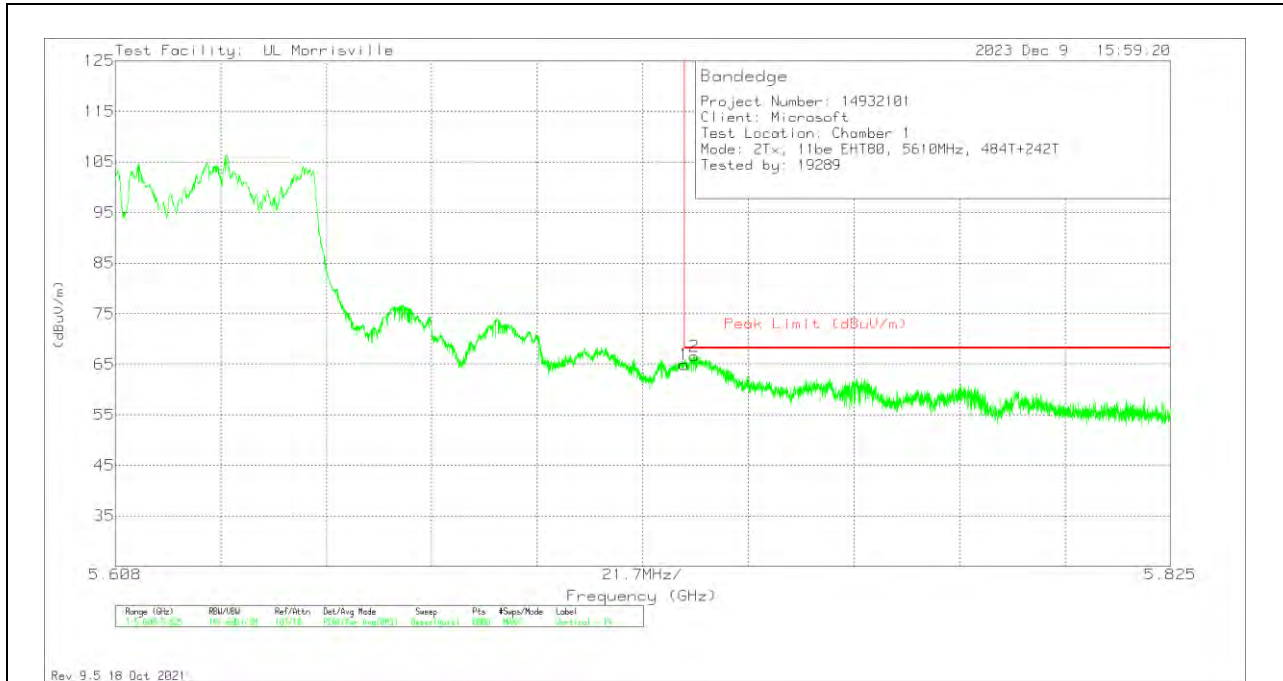


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.42	Pk	34.5	-23	10	64.92	68.2	-3.28	319	231	V
2	5.72709	45.01	Pk	34.5	-22.9	10	66.61	68.2	-1.59	319	231	V

Pk - Peak detector

2TX CDD MODE – 242T+484T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

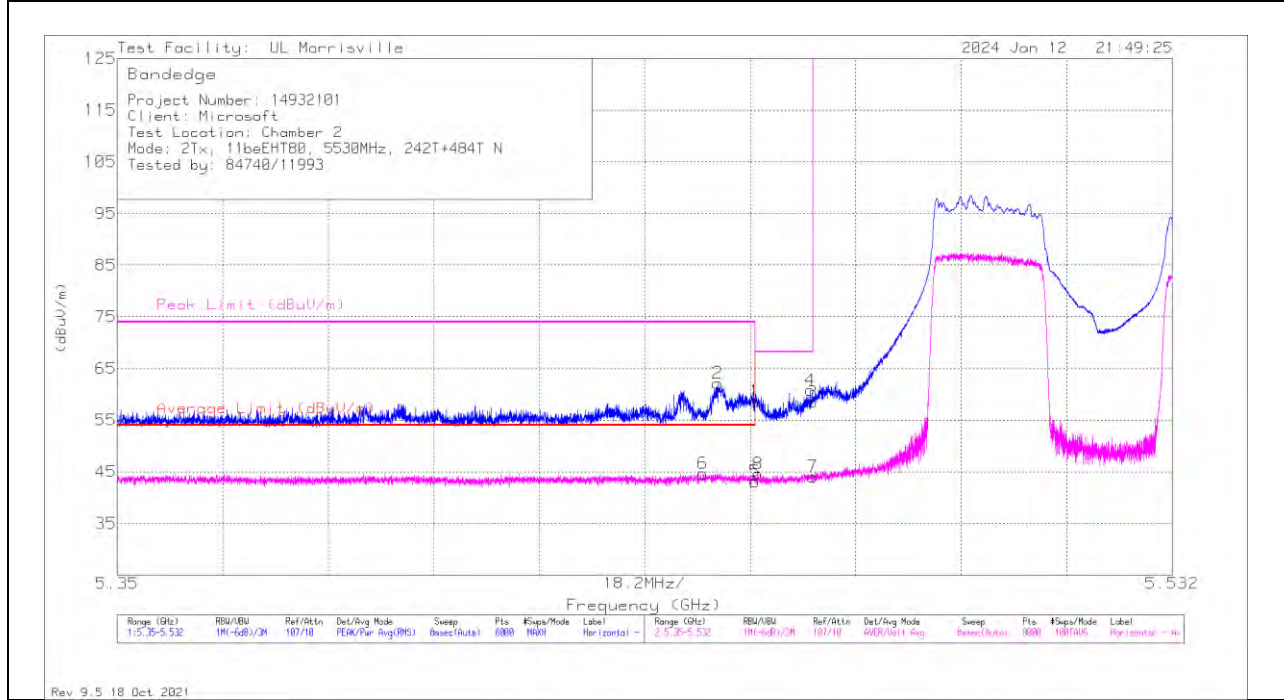

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	37.44	Pk	34.5	-23.3	10	58.64	-	-	74	-15.36	277	386	H
2	*** 5.45357	40.84	Pk	34.5	-23.2	10	62.14	-	-	74	-11.86	277	386	H
5	*** 5.45999	21.9	ADV	34.5	-23.3	10	43.1	54	-10.9	-	-	277	386	H
6	*** 5.45105	23.36	ADV	34.5	-23.2	10	44.66	54	-9.34	-	-	277	386	H
8	5.46056	23.4	ADV	34.5	-23.3	10	44.6	-	-	-	-	277	386	H
4	5.46952	39.48	Pk	34.5	-23.2	10	60.78	-	-	68.2	-7.42	277	386	H
3	5.47	37.16	Pk	34.5	-23.2	10	58.46	-	-	68.2	-9.74	277	386	H
7	5.47	22.69	ADV	34.5	-23.2	10	43.99	-	-	-	-	277	386	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

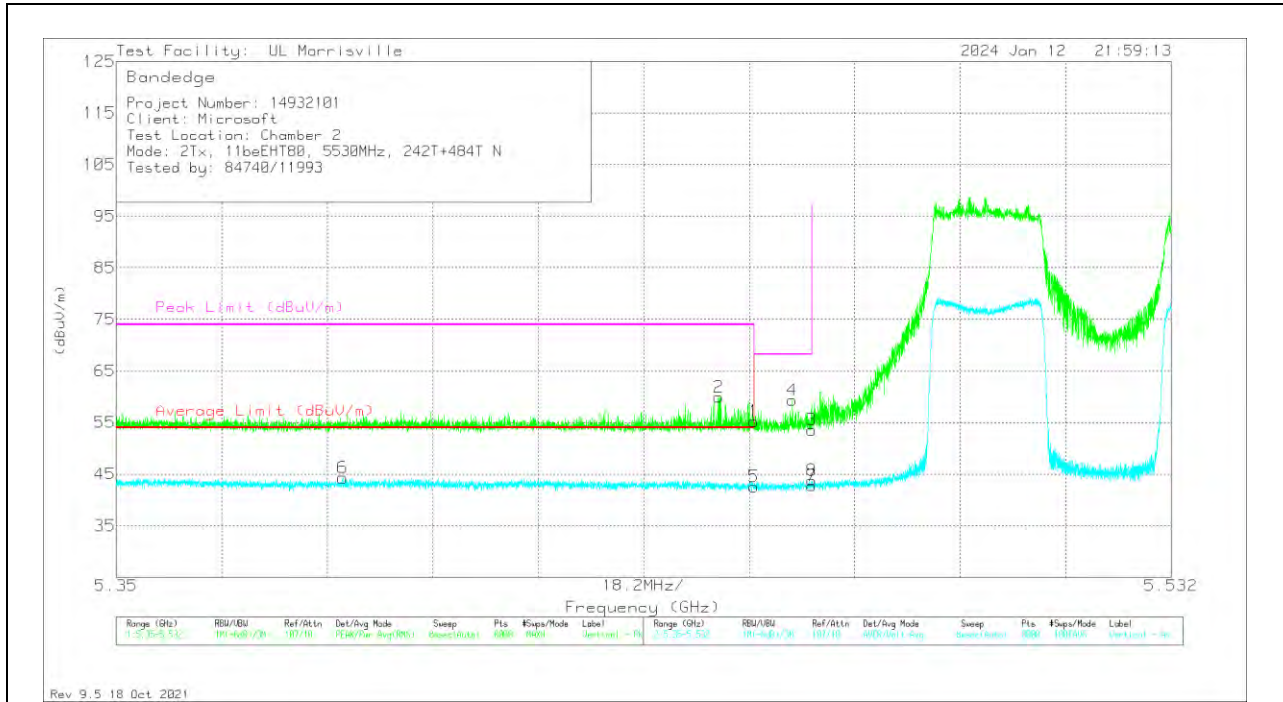

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	34.03	Pk	34.5	-23.3	10	55.23	-	-	74	-18.77	280	386	V
2	*** 5.45391	38.64	Pk	34.5	-23.2	10	59.94	-	-	74	-14.06	280	386	V
5	*** 5.45999	21.35	ADV	34.5	-23.3	10	42.55	54	-11.45	-	-	280	386	V
6	*** 5.38907	22.9	ADV	34.4	-23	10	44.3	54	-9.7	-	-	280	386	V
4	5.46665	38.11	Pk	34.5	-23.3	10	59.31	-	-	68.2	-8.89	280	386	V
8	5.46998	22.45	ADV	34.5	-23.2	10	43.75	-	-	-	-	280	386	V
3	5.47	32.26	Pk	34.5	-23.2	10	53.56	-	-	68.2	-14.64	280	386	V
7	5.47	21.47	ADV	34.5	-23.2	10	42.77	-	-	-	-	280	386	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

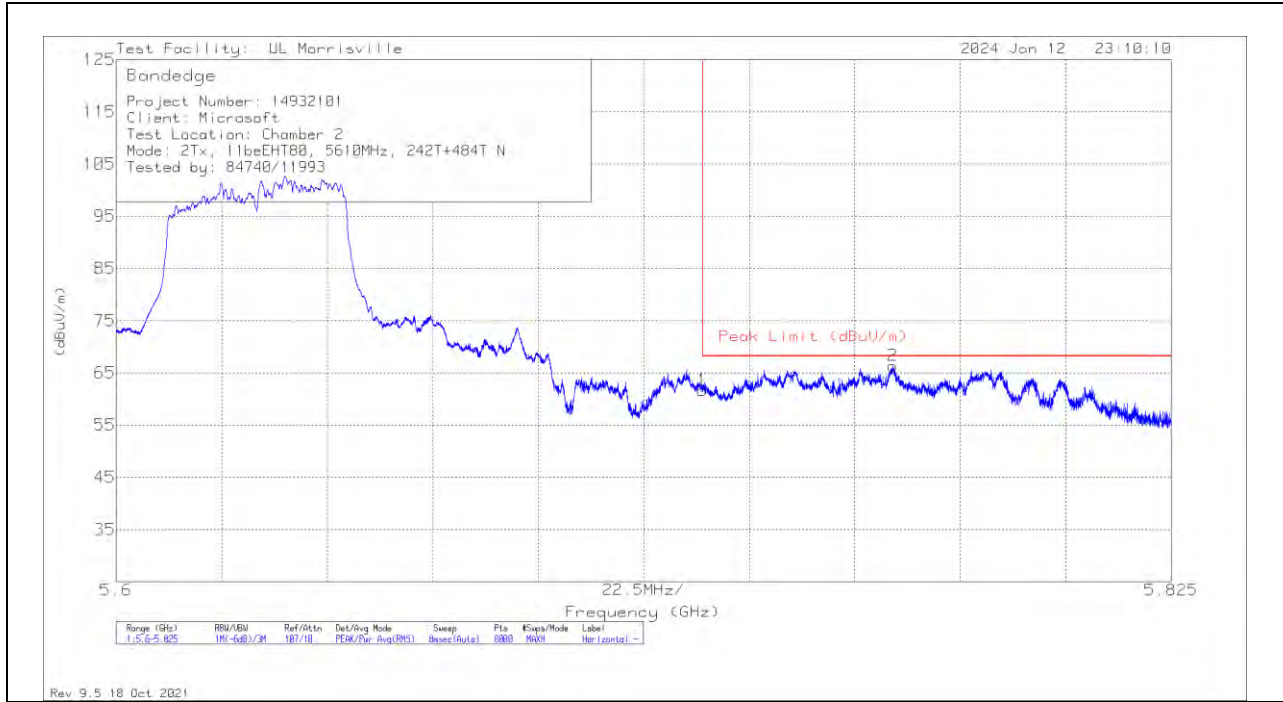

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.96	Pk	34.7	-23	10	61.66	68.2	-6.54	284	384	H
2	5.76565	44.86	Pk	34.7	-23.2	10	66.36	68.2	-1.84	284	384	H

Pk - Peak detector

VERTICAL RESULT

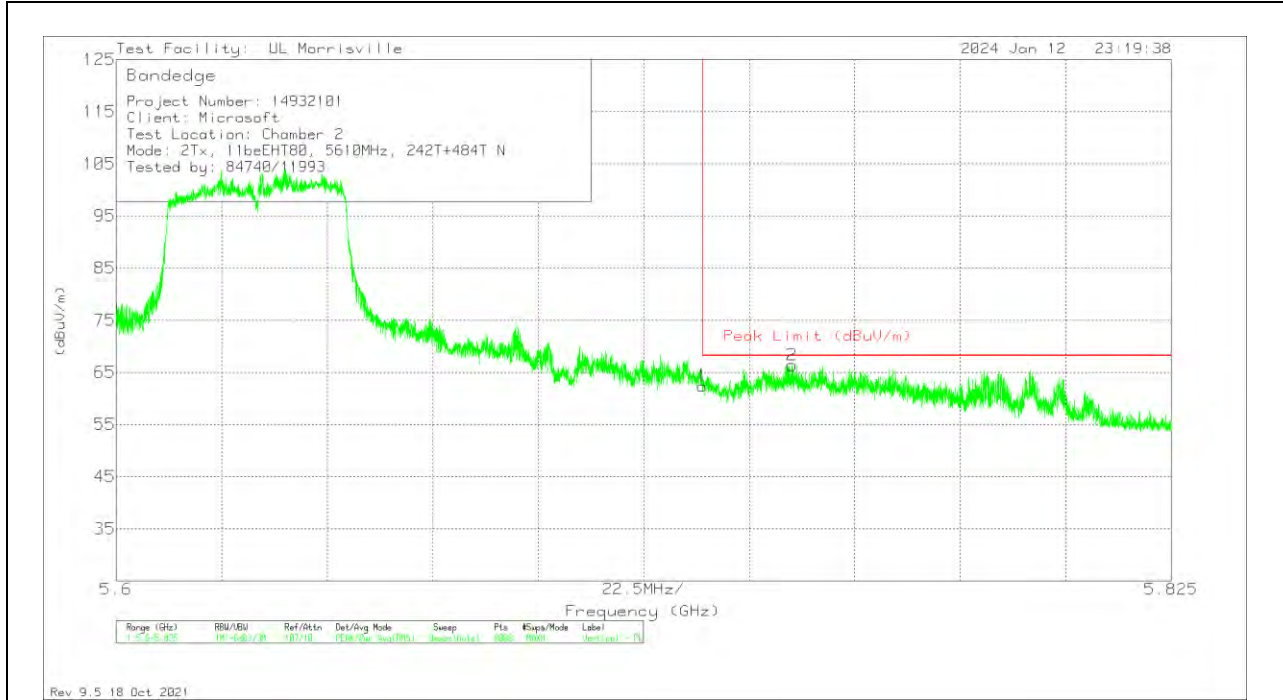


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	40.67	Pk	34.7	-23	10	62.37	68.2	-5.83	280	366	V
2	5.7441	44.89	Pk	34.7	-23.2	10	66.39	68.2	-1.81	280	366	V

Pk - Peak detector

2TX CDD MODE – 484T+242T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

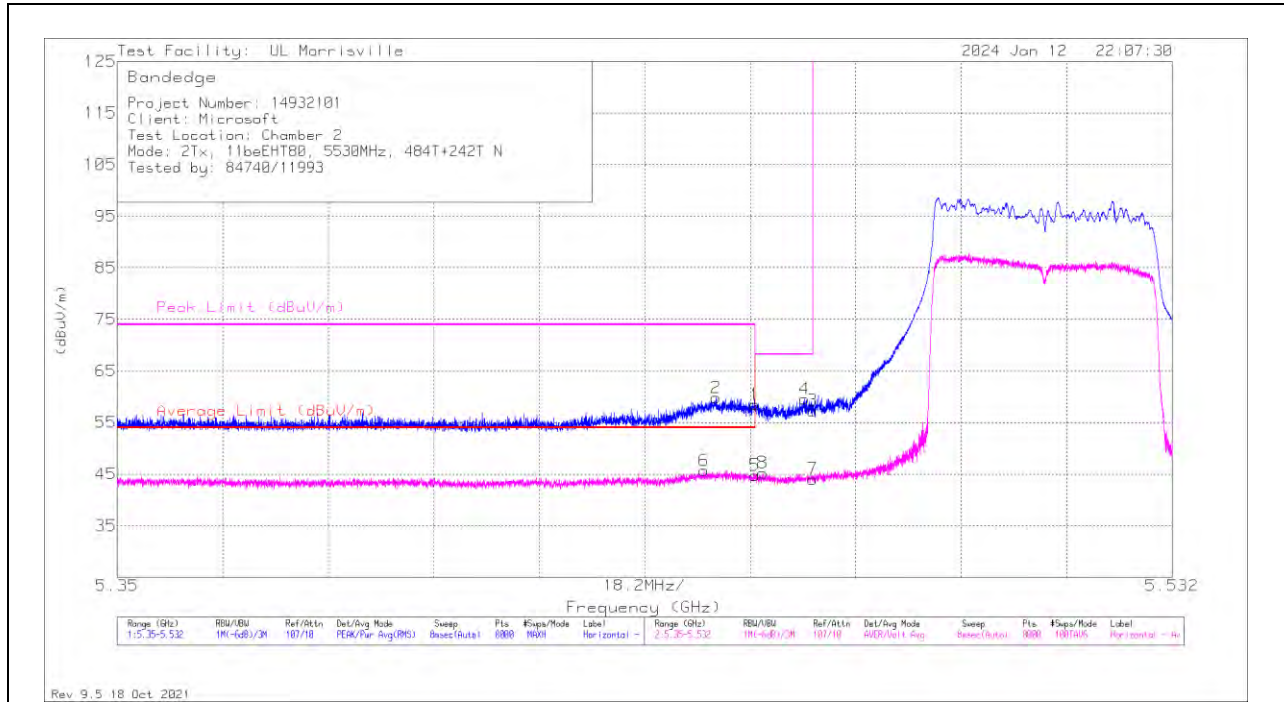

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	37.26	Pk	34.5	-23.3	10	58.46	-	-	74	-15.54	275	387	H
2	*** 5.4533	38.49	Pk	34.5	-23.2	10	59.79	-	-	74	-14.21	275	387	H
5	*** 5.45999	23.53	ADV	34.5	-23.3	10	44.73	54	-9.27	-	-	275	387	H
6	*** 5.45125	24.39	ADV	34.5	-23.2	10	45.69	54	-8.31	-	-	275	387	H
8	5.46135	24.03	ADV	34.5	-23.3	10	45.23	-	-	-	-	275	387	H
4	5.46859	38.38	Pk	34.5	-23.3	10	59.58	-	-	68.2	-8.62	275	387	H
3	5.47	36.04	Pk	34.5	-23.2	10	57.34	-	-	68.2	-10.86	275	387	H
7	5.47	22.69	ADV	34.5	-23.2	10	43.99	-	-	-	-	275	387	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

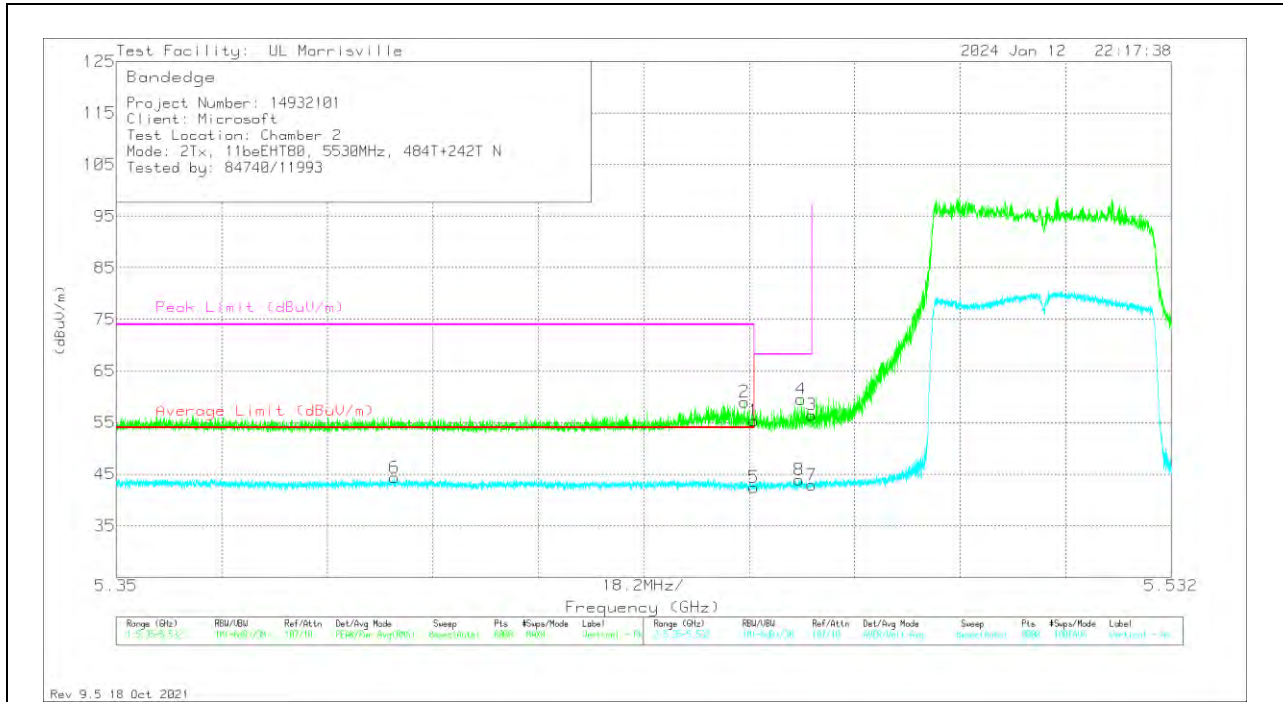

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	34.14	Pk	34.5	-23.3	10	55.34	-	-	74	-18.66	276	387	V
2	*** 5.45835	37.8	Pk	34.5	-23.3	10	59	-	-	74	-15	276	387	V
5	*** 5.45999	21.23	ADV	34.5	-23.3	10	42.43	54	-11.57	-	-	276	387	V
6	*** 5.39799	22.83	ADV	34.4	-22.9	10	44.33	54	-9.67	-	-	276	387	V
8	5.46779	22.68	ADV	34.5	-23.3	10	43.88	-	-	-	-	276	387	V
4	5.46818	38.33	Pk	34.5	-23.3	10	59.53	-	-	68.2	-8.67	276	387	V
3	5.47	35.17	Pk	34.5	-23.2	10	56.47	-	-	68.2	-11.73	276	387	V
7	5.47	21.59	ADV	34.5	-23.2	10	42.89	-	-	-	-	276	387	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

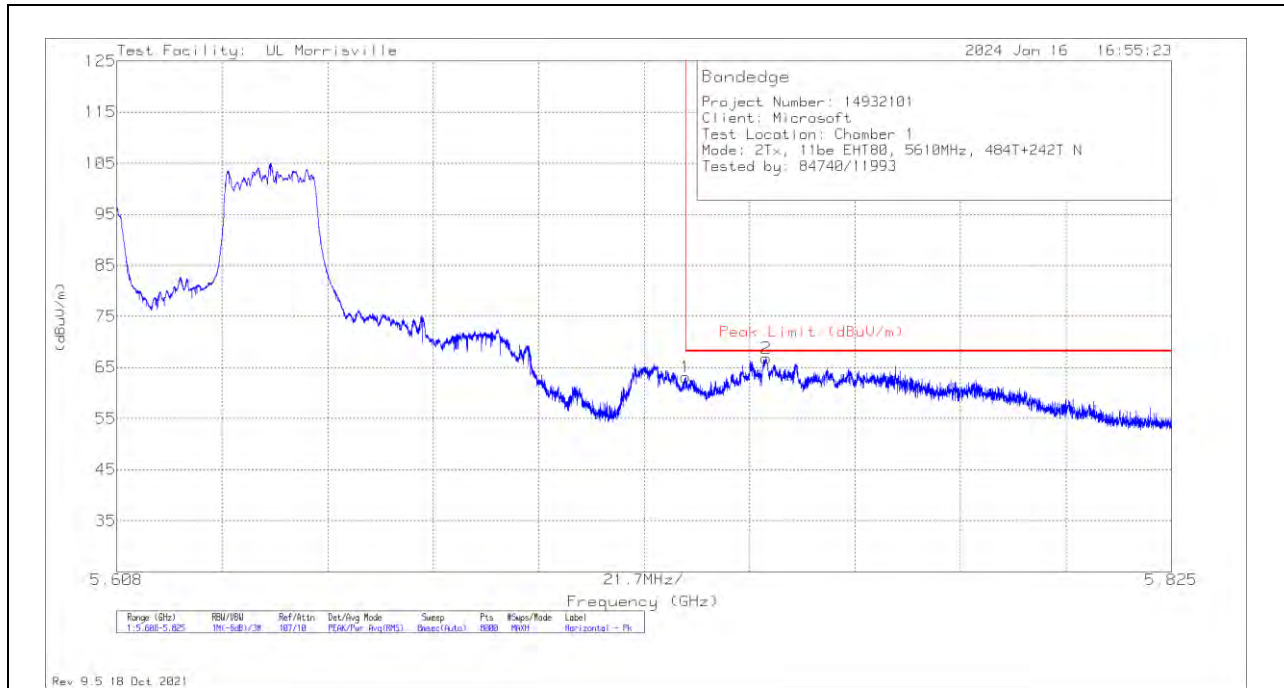

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.66	Pk	34.5	-23	10	63.16	68.2	-5.04	220	394	H
2	5.74163	45.47	Pk	34.5	-23.2	10	66.77	68.2	-1.43	220	394	H

PK - Peak detector

VERTICAL RESULT

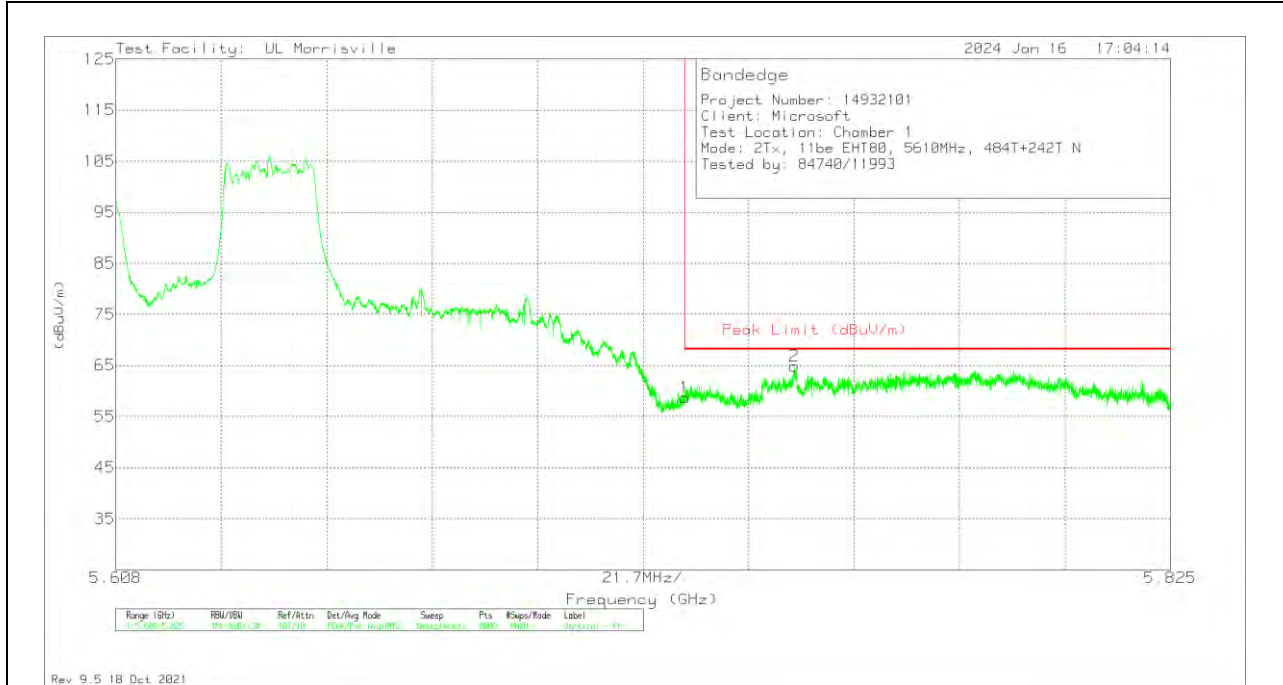


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.16	Pk	34.5	-23	10	58.66	68.2	-9.54	171	350	V
2	5.74763	43.44	Pk	34.6	-23.2	10	64.84	68.2	-3.36	171	350	V

Pk - Peak detector

2TX CDD MODE – 996T

BANDEGE (LOW CHANNEL)

HORIZONTAL RESULT

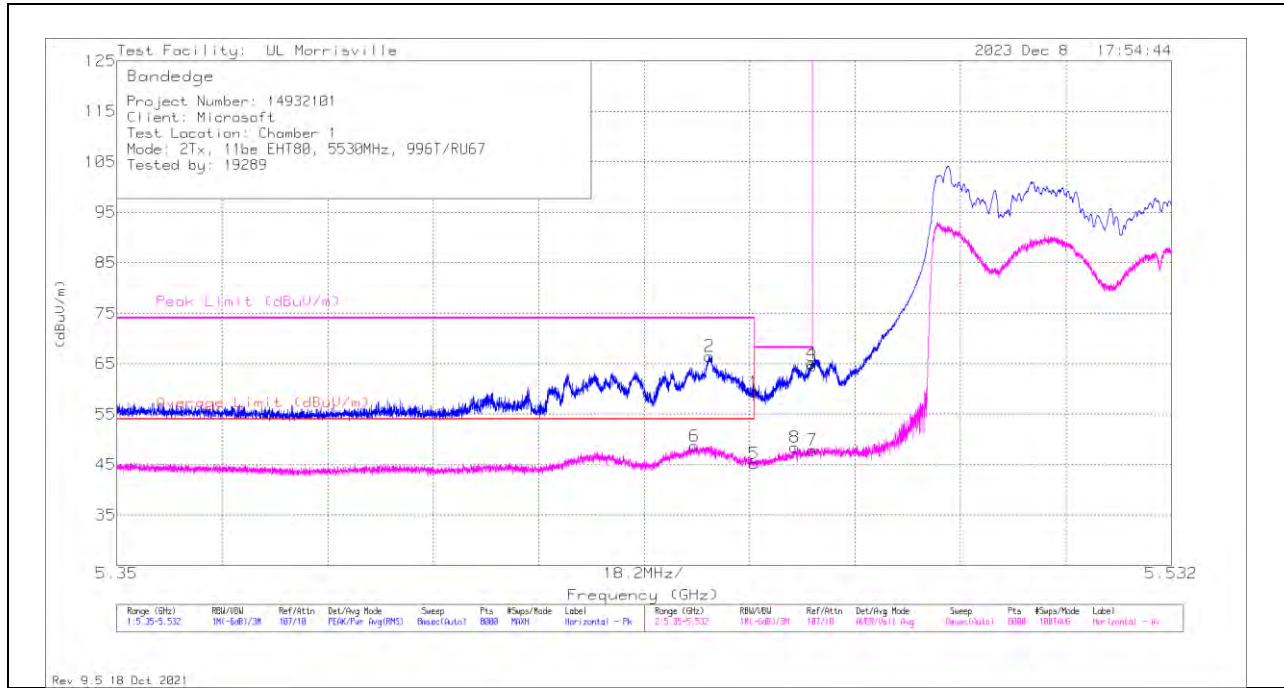

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	38.26	Pk	34.4	-23.3	10	59.36	-	-	74	-14.64	34	385	H
2	*** 5.45227	45.29	Pk	34.4	-23.2	10	66.49	-	-	74	-7.51	34	385	H
5	*** 5.45999	24.14	ADV	34.4	-23.3	10	45.24	54	-8.76	-	-	34	385	H
6	*** 5.44968	27.47	ADV	34.4	-23.2	10	48.67	54	-5.33	-	-	34	385	H
8	5.46704	27.37	ADV	34.4	-23.3	10	48.47	-	-	-	-	34	385	H
4	5.46991	43.85	Pk	34.4	-23.2	10	65.05	-	-	68.2	-3.15	34	385	H
3	5.47	43.42	Pk	34.4	-23.2	10	64.62	-	-	68.2	-3.58	34	385	H
7	5.47	26.67	ADV	34.4	-23.2	10	47.87	-	-	-	-	34	385	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

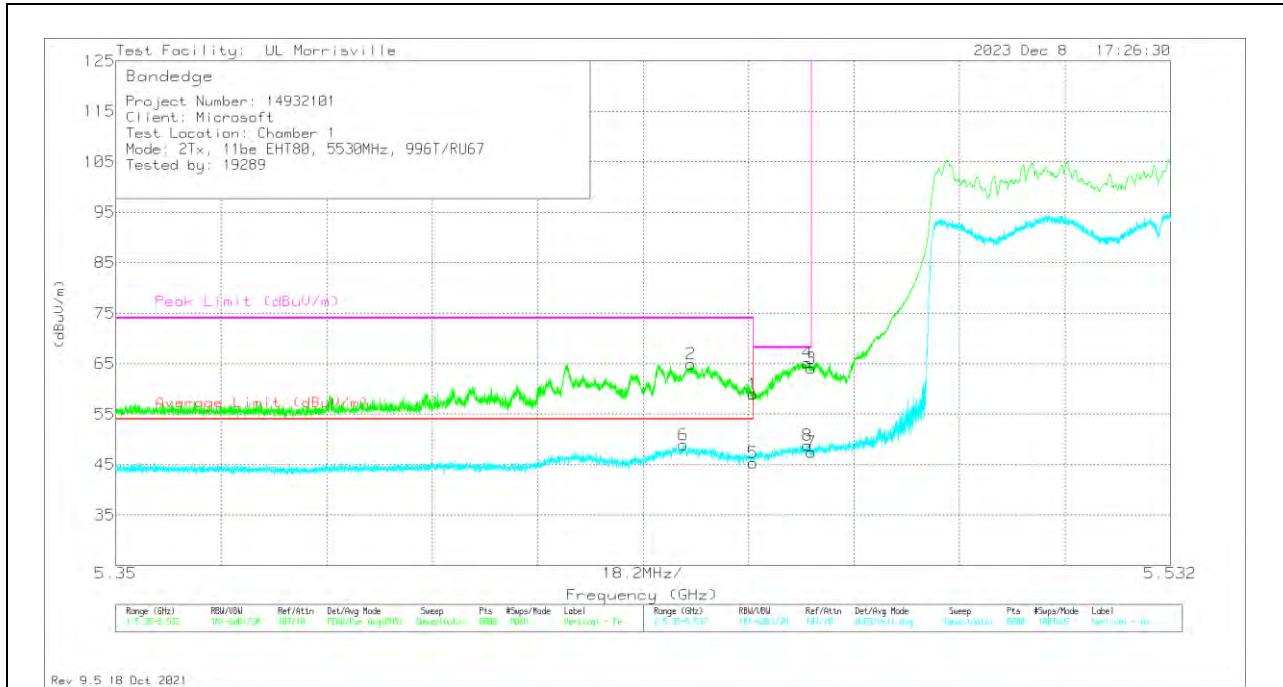


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	37.88	Pk	34.4	-23.3	10	58.98	-	-	74	-15.02	353	260	V
2	*** 5.44923	43.78	Pk	34.4	-23.2	10	64.98	-	-	74	-9.02	353	260	V
5	*** 5.45999	24.27	ADV	34.4	-23.3	10	45.37	54	-8.63	-	-	353	260	V
6	*** 5.44793	27.58	ADV	34.4	-23.1	10	48.88	54	-5.12	-	-	353	260	V
4	5.46936	44.03	Pk	34.4	-23.2	10	65.23	-	-	68.2	-2.97	353	260	V
8	5.46939	27.61	ADV	34.4	-23.2	10	48.81	-	-	-	-	353	260	V
3	5.47	42.91	Pk	34.4	-23.2	10	64.11	-	-	68.2	-4.09	353	260	V
7	5.47	26.19	ADV	34.4	-23.2	10	47.39	-	-	-	-	353	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

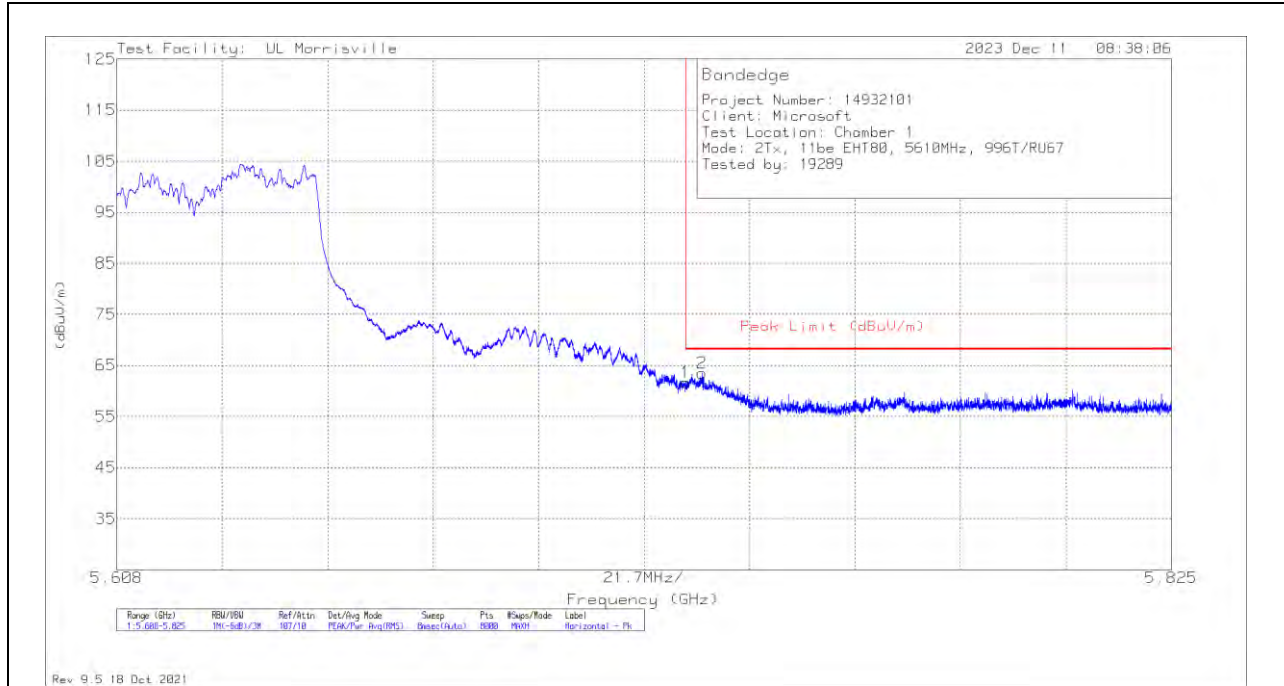

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.14	Pk	34.5	-23	10	61.64	68.2	-6.56	34	394	H
2	5.72842	41.85	Pk	34.5	-22.9	10	63.45	68.2	-4.75	34	394	H

Pk - Peak detector

VERTICAL RESULT

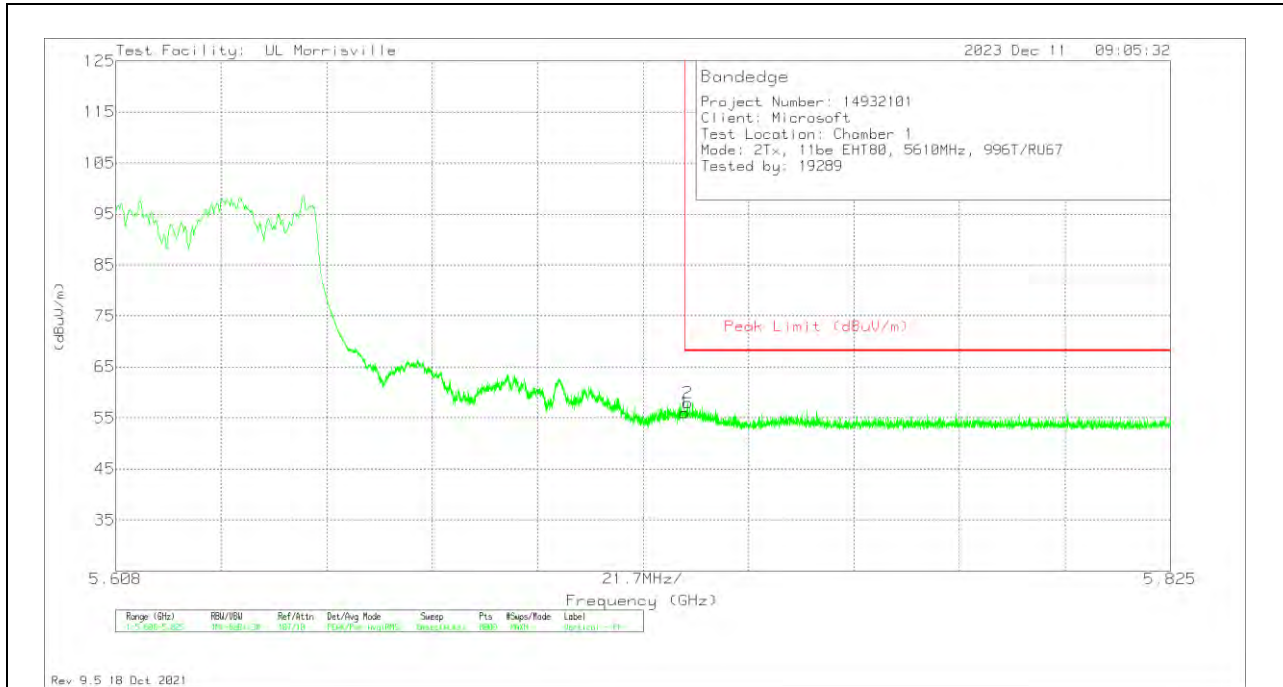

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	34.57	Pk	34.5	-23	10	56.07	68.2	-12.13	341	352	V
2	5.72565	36.49	Pk	34.5	-23	10	57.99	68.2	-10.21	341	352	V


Pk - Peak detector

10.1.25. TX ABOVE 1 GHz 802.11be EHT160 MODE IN THE 5.6 GHz BAND

2TX CDD MODE – 996T+484T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

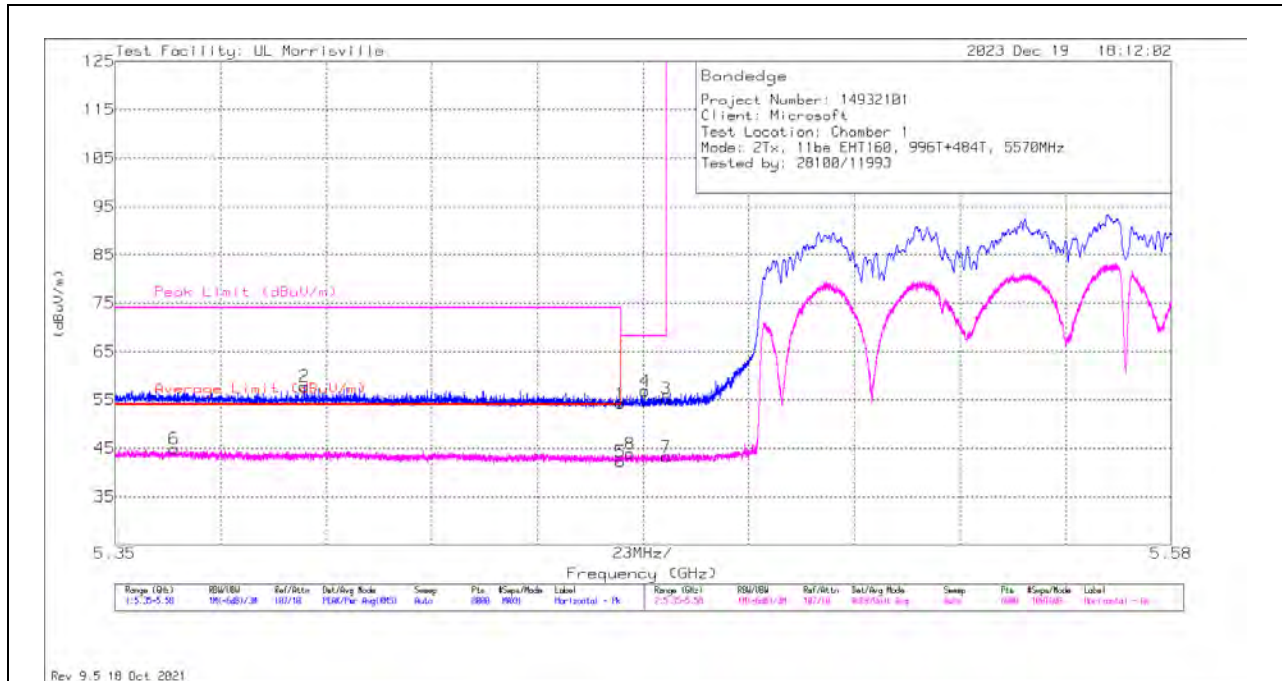

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 5.45998	33.26	Pk	34.4	-23.3	10	0	54.36	-	-	74	-19.64	229	237	H
2	* ** 5.3912	36.29	Pk	34.5	-23	10	0	57.79	-	-	74	-16.21	229	237	H
5	** 5.45998	21.13	ADV	34.4	-23.3	10	0.18	42.41	54	-11.59	-	-	229	237	V
6	** 5.36285	23.19	ADV	34.5	-22.8	10	0.18	45.07	54	-8.93	-	-	229	237	V
8	5.46211	22.79	ADV	34.4	-23.3	10	0.18	44.07	-	-	-	-	229	237	V
4	5.46542	35.82	Pk	34.4	-23.4	10	0	56.82	-	-	68.2	-11.38	229	237	H
3	5.46999	34.13	Pk	34.4	-23.2	10	0	55.33	-	-	68.2	-12.87	229	237	H
7	5.46999	22.03	ADV	34.4	-23.2	10	0.18	43.41	-	-	-	-	229	237	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

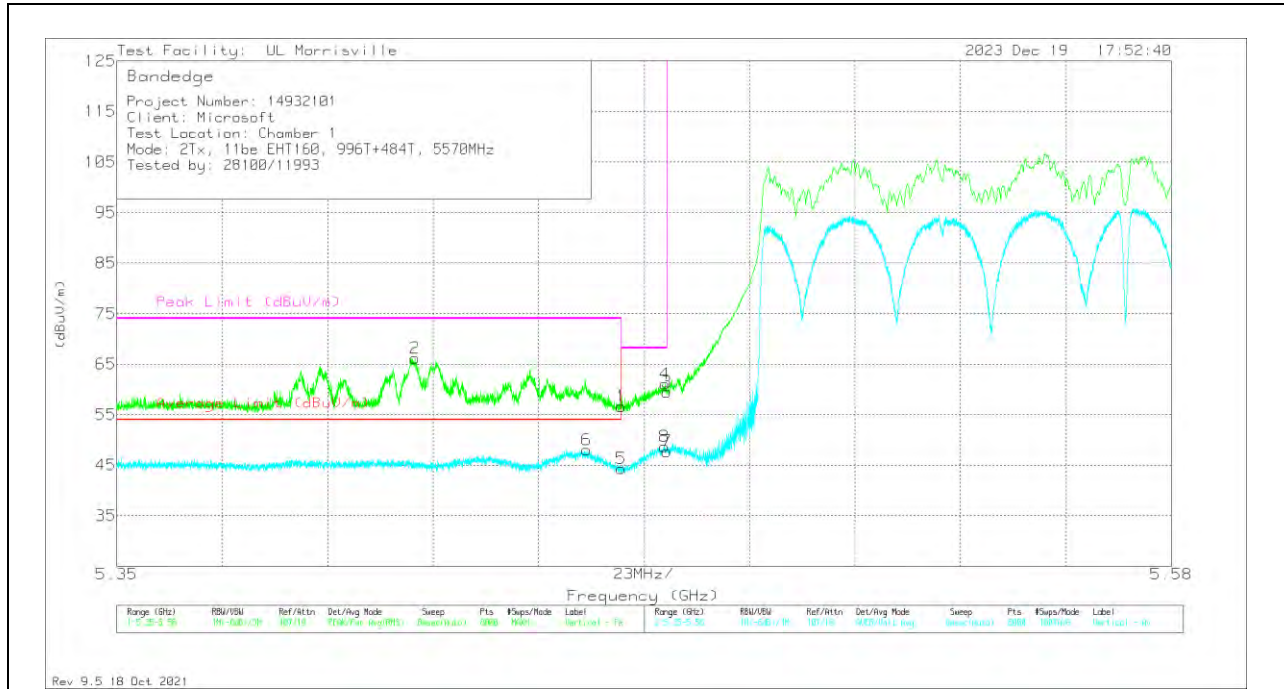


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	35.48	Pk	34.4	-23.3	10	0	56.58	-	-	74	-17.42	335	226	V
2	* ** 5.41504	44.86	Pk	34.5	-23.2	10	0	66.16	-	-	74	-7.84	335	226	V
5	* ** 5.45998	23.28	ADV	34.4	-23.3	10	0.18	44.56	54	-9.44	-	-	335	226	V
6	* ** 5.45251	26.82	ADV	34.4	-23.2	10	0.18	48.20	54	-5.80	-	-	335	226	V
8	5.46942	27.5	ADV	34.4	-23.2	10	0.18	48.88	-	-	-	-	335	226	V
4	5.46953	39.93	Pk	34.4	-23.2	10	0	61.13	-	-	68.2	-7.07	335	226	V
3	5.46999	38.33	Pk	34.4	-23.2	10	0	59.53	-	-	68.2	-8.67	335	226	V
7	5.46999	26.55	ADV	34.4	-23.2	10	0.18	47.93	-	-	-	-	335	226	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

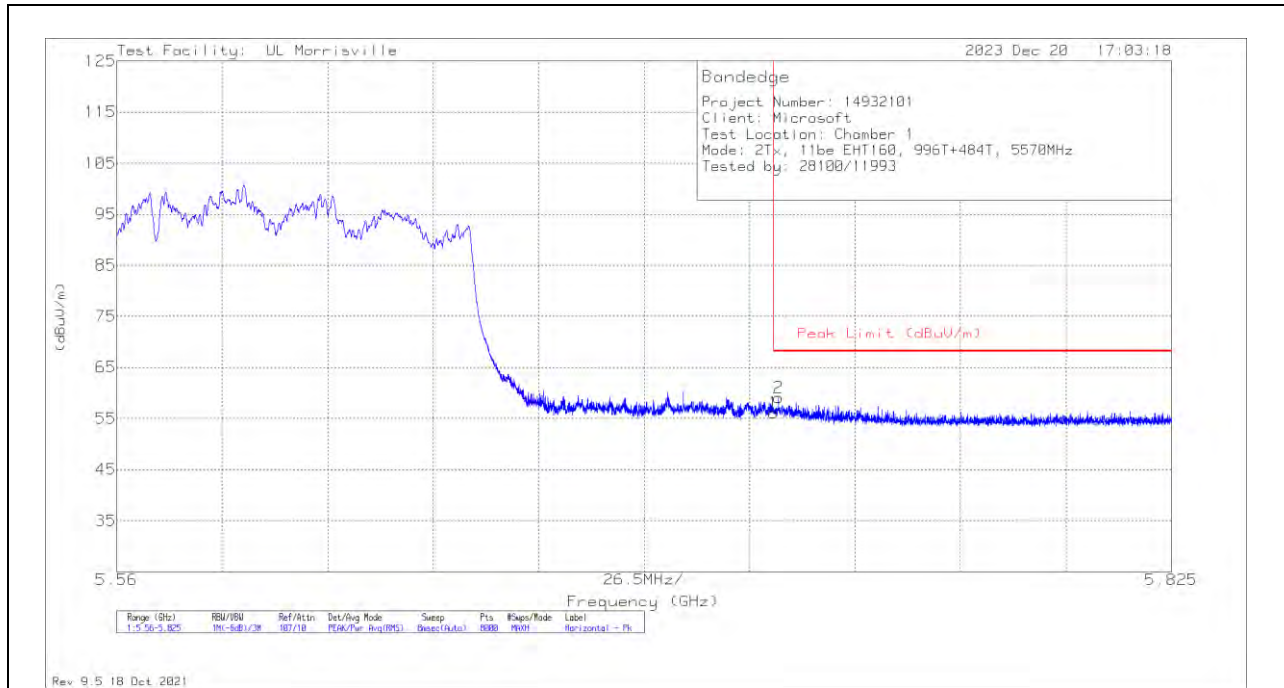

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	34.68	Pk	34.5	-23	10	56.18	68.2	-12.02	35	385	H
2	5.72627	37.52	Pk	34.5	-22.9	10	59.12	68.2	-9.08	35	385	H

Pk - Peak detector

VERTICAL RESULT

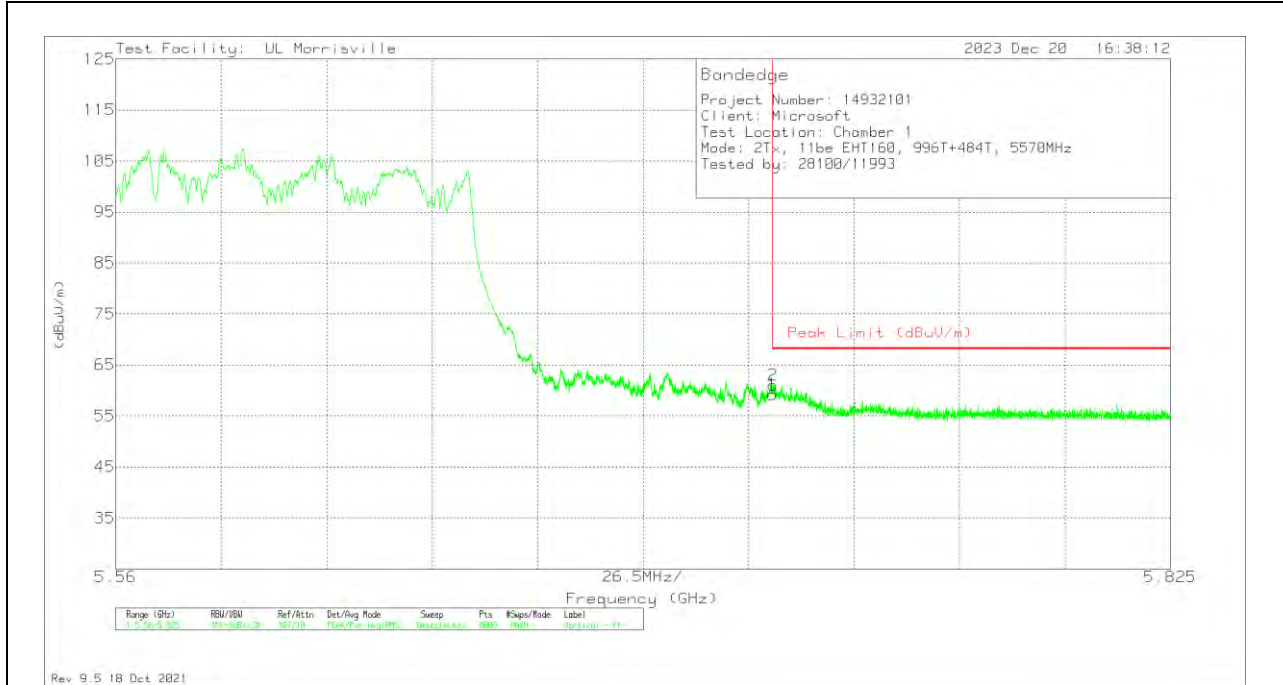


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	37.72	Pk	34.5	-23	10	59.22	68.2	-8.98	337	260	V
2	5.72521	39.59	Pk	34.5	-23	10	61.09	68.2	-7.11	337	260	V

Pk - Peak detector

2TX CDD MODE – 484T+996T (NON-CONTIGUOUS)

BANDEDGE (LOW)

HORIZONTAL RESULT

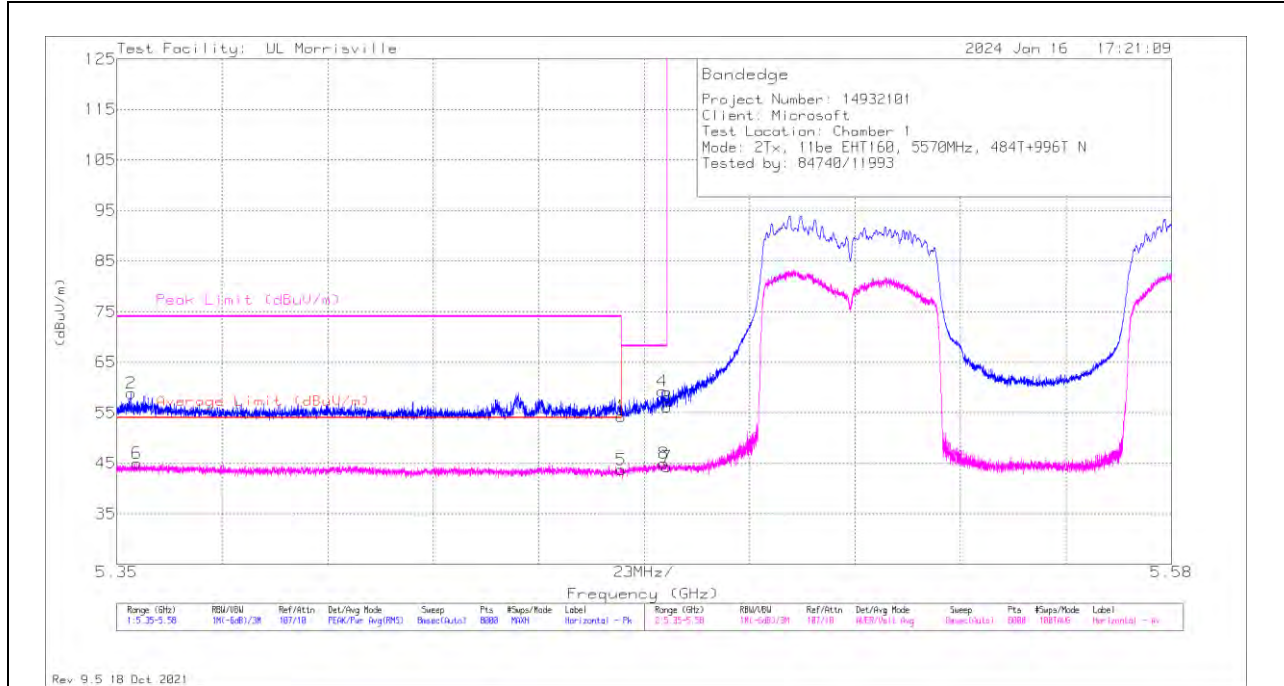

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	33.21	PK	34.4	-23.3	10	0	54.31	-	-	74	-19.69	17	368	H
2	*** 5.35311	37.09	PK	34.5	-22.7	10	0	58.89	-	-	74	-15.11	17	368	H
5	*** 5.45998	22.57	ADV	34.4	-23.3	10	0.18	43.85	54	-10.15	-	-	17	368	H
6	*** 5.35434	23.21	ADV	34.5	-22.7	10	0.18	45.19	54	-8.81	-	-	17	368	H
4	5.46896	37.98	PK	34.4	-23.2	10	0	59.18	-	-	68.2	-9.02	17	368	H
8	5.46927	23.75	ADV	34.4	-23.2	10	0.18	45.13	-	-	-	-	17	368	H
3	5.46999	34.92	PK	34.4	-23.2	10	0	56.12	-	-	68.2	-12.08	17	368	H
7	5.46999	23.17	ADV	34.4	-23.2	10	0.18	44.55	-	-	-	-	17	368	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

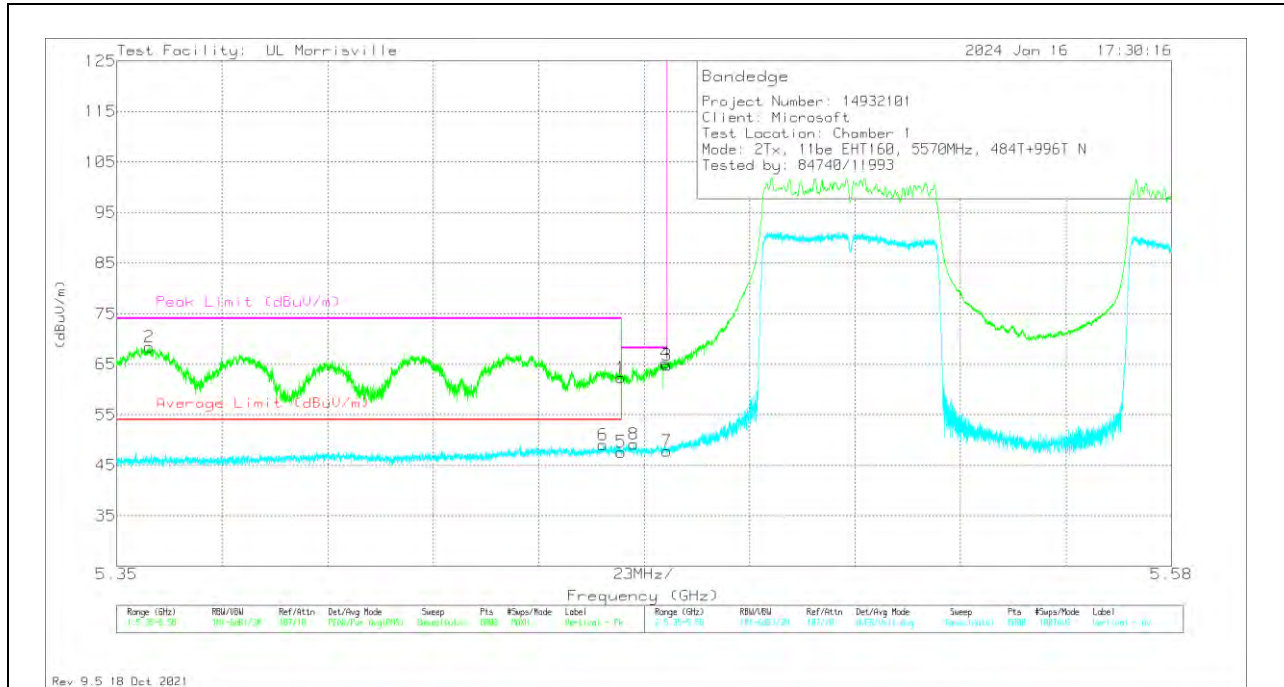


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	41.2	Pk	34.4	-23.3	10	0	62.3	-	-	74	-11.7	303	220	V
2	*** 5.35707	46.64	Pk	34.5	-22.7	10	0	68.44	-	-	74	-5.56	303	220	V
5	*** 5.45998	26.52	ADV	34.4	-23.3	10	0.18	47.80	54	-6.20	-	-	303	220	V
6	*** 5.45604	27.86	ADV	34.4	-23.2	10	0.18	49.24	54	-4.76	-	-	303	220	V
8	5.46274	28.15	ADV	34.4	-23.4	10	0.18	49.33	-	-	-	-	303	220	V
4	5.46965	44.03	Pk	34.4	-23.2	10	0	65.23	-	-	68.2	-2.97	303	220	V
3	5.46999	43.61	Pk	34.4	-23.2	10	0	64.81	-	-	68.2	-3.39	303	220	V
7	5.46999	26.58	ADV	34.4	-23.2	10	0.18	47.96	-	-	-	-	303	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH)


HORIZONTAL RESULT

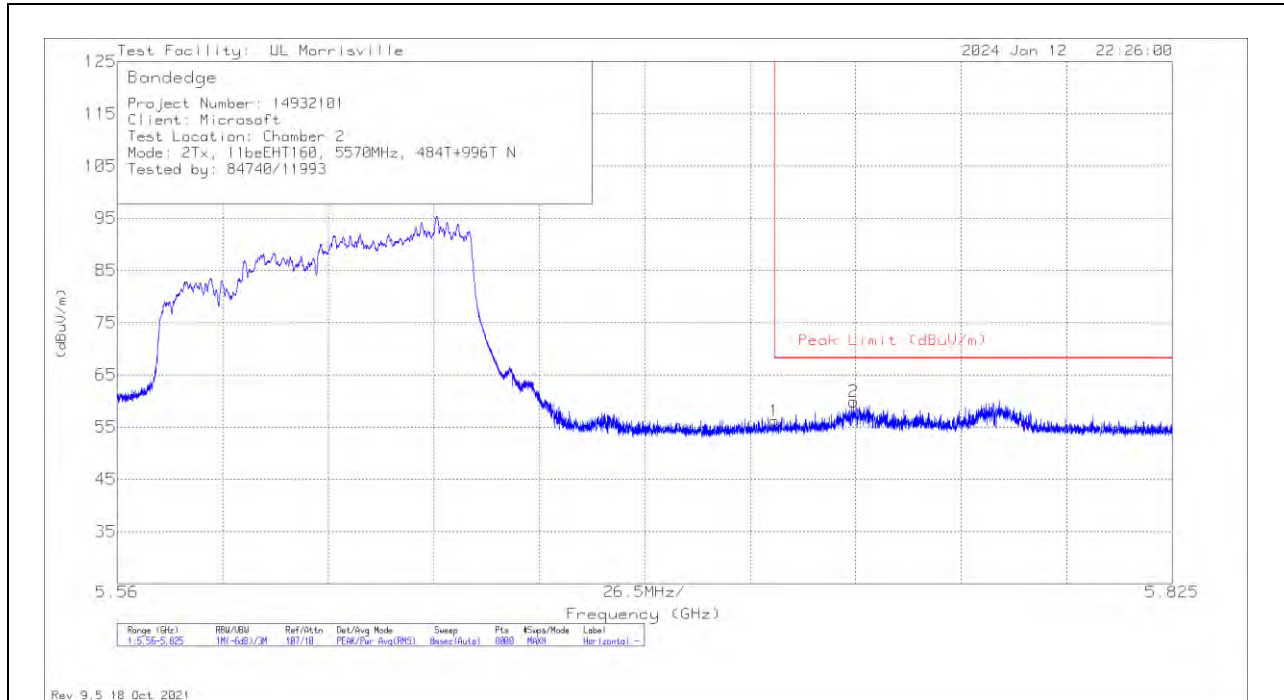

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	34.48	Pk	34.7	-23	10	56.18	68.2	-12.02	274	384	H
2	5.74499	38.39	Pk	34.7	-23.2	10	59.89	68.2	-8.31	274	384	H

Pk - Peak detector

VERTICAL RESULT

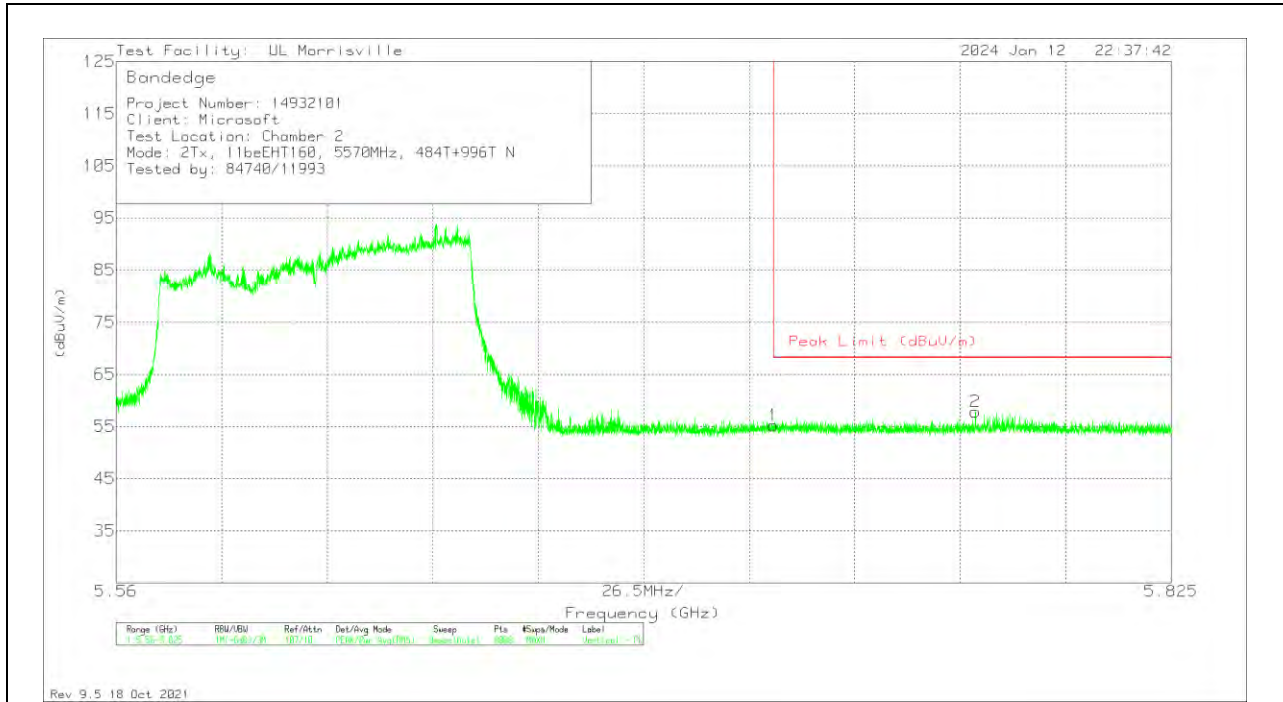


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	33.49	Pk	34.7	-23	10	55.19	68.2	-13.01	285	362	V
2	5.7758	36.04	Pk	34.8	-23.1	10.1	57.84	68.2	-10.36	285	362	V

Pk - Peak detector

2TX CDD MODE – 996T+484T (NON-CONTIGUOUS)

BANDEDGE (LOW)

HORIZONTAL RESULT

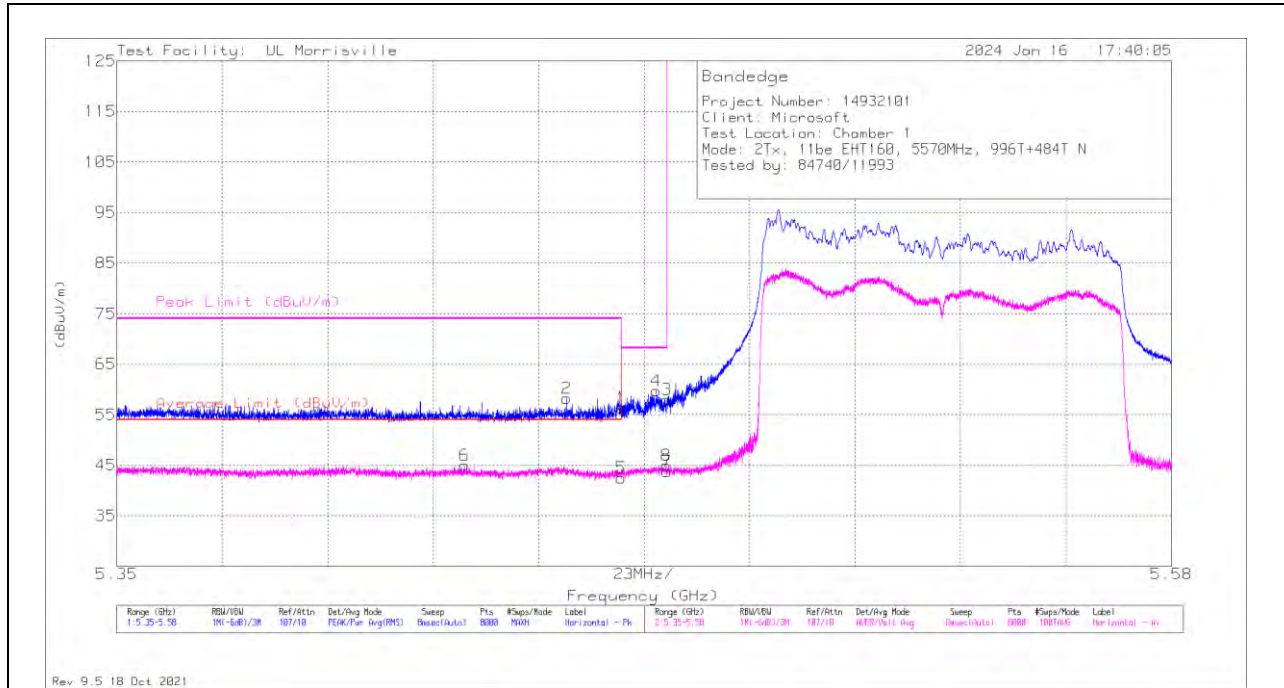

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	35.33	PK	34.4	-23.3	10	0	56.43	-	-	74	-17.57	21	368	H
2	*** 5.44811	36.9	PK	34.4	-23.1	10	0	58.2	-	-	74	-15.8	21	368	H
5	*** 5.45998	21.35	ADV	34.4	-23.3	10	0.18	42.63	54	-11.37	-	-	21	368	H
6	*** 5.42588	23.57	ADV	34.5	-23	9.9	0.18	45.15	54	-8.85	-	-	21	368	H
4	5.46763	38.59	PK	34.4	-23.3	10	0	59.69	-	-	68.2	-8.51	21	368	H
8	5.46988	23.76	ADV	34.4	-23.2	10	0.18	45.14	-	-	-	-	21	368	H
3	5.46999	36.73	PK	34.4	-23.2	10	0	57.93	-	-	68.2	-10.27	21	368	H
7	5.46999	22.53	ADV	34.4	-23.2	10	0.18	43.91	-	-	-	-	21	368	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

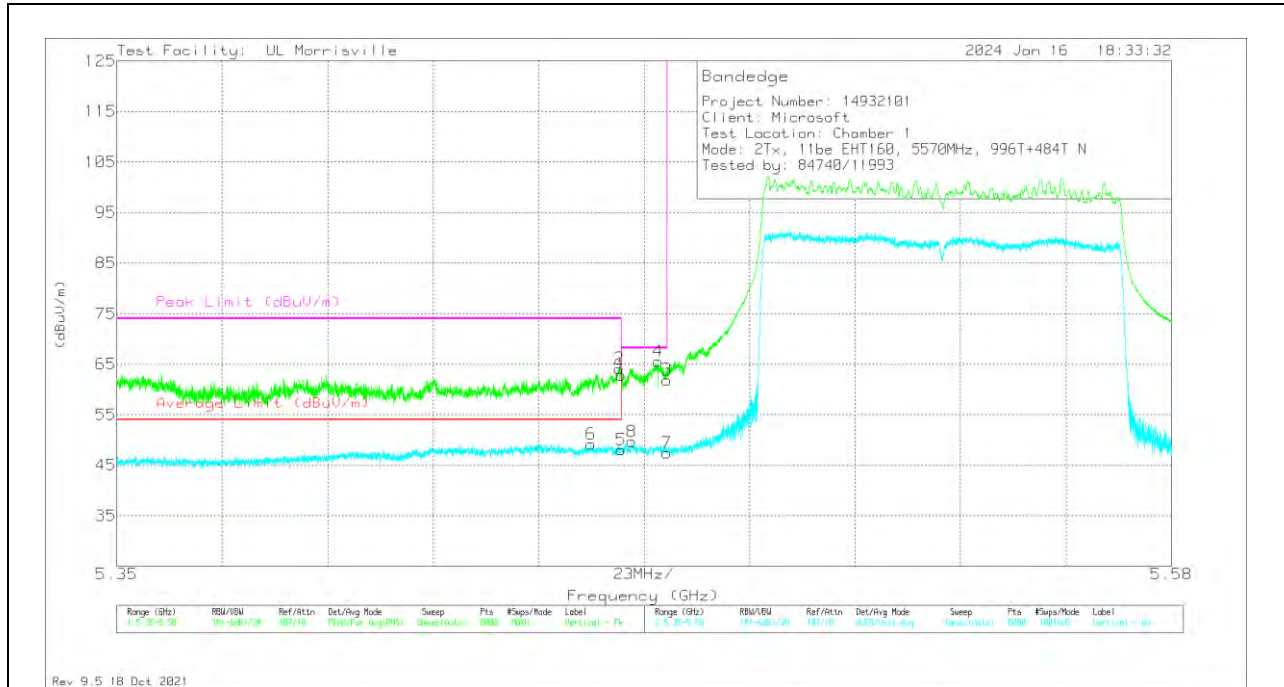


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	41.77	Pk	34.4	-23.3	10	0	62.87	-	-	74	-11.13	300	225	V
2	*** 5.45961	43.03	Pk	34.4	-23.3	10	0	64.13	-	-	74	-9.87	300	225	V
5	*** 5.45998	26.92	ADV	34.4	-23.3	10	0.18	48.20	54	-5.80	-	-	300	225	V
6	*** 5.4534	28	ADV	34.4	-23.2	10	0.18	49.38	54	-4.62	-	-	300	225	V
8	5.46237	28.62	ADV	34.4	-23.4	10	0.18	49.80	-	-	-	-	300	225	V
4	5.46806	44.45	Pk	34.4	-23.3	10	0	65.55	-	-	68.2	-2.65	300	225	V
3	5.46999	40.7	Pk	34.4	-23.2	10	0	61.9	-	-	68.2	-6.3	300	225	V
7	5.46999	26.28	ADV	34.4	-23.2	10	0.18	47.66	-	-	-	-	300	225	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH)


HORIZONTAL RESULT

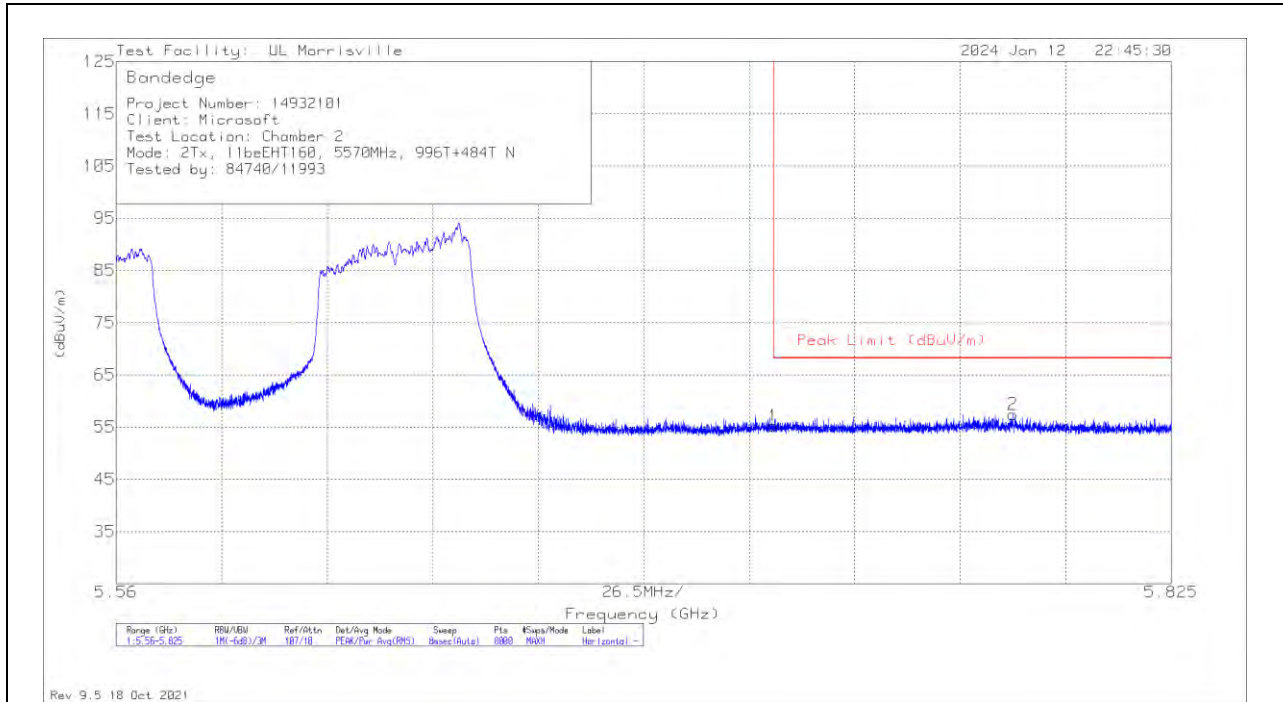

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	33.53	Pk	34.7	-23	10	55.23	68.2	-12.97	285	341	H
2	5.78518	35.52	Pk	34.8	-23	10.1	57.42	68.2	-10.78	285	341	H

Pk - Peak detector

VERTICAL RESULT

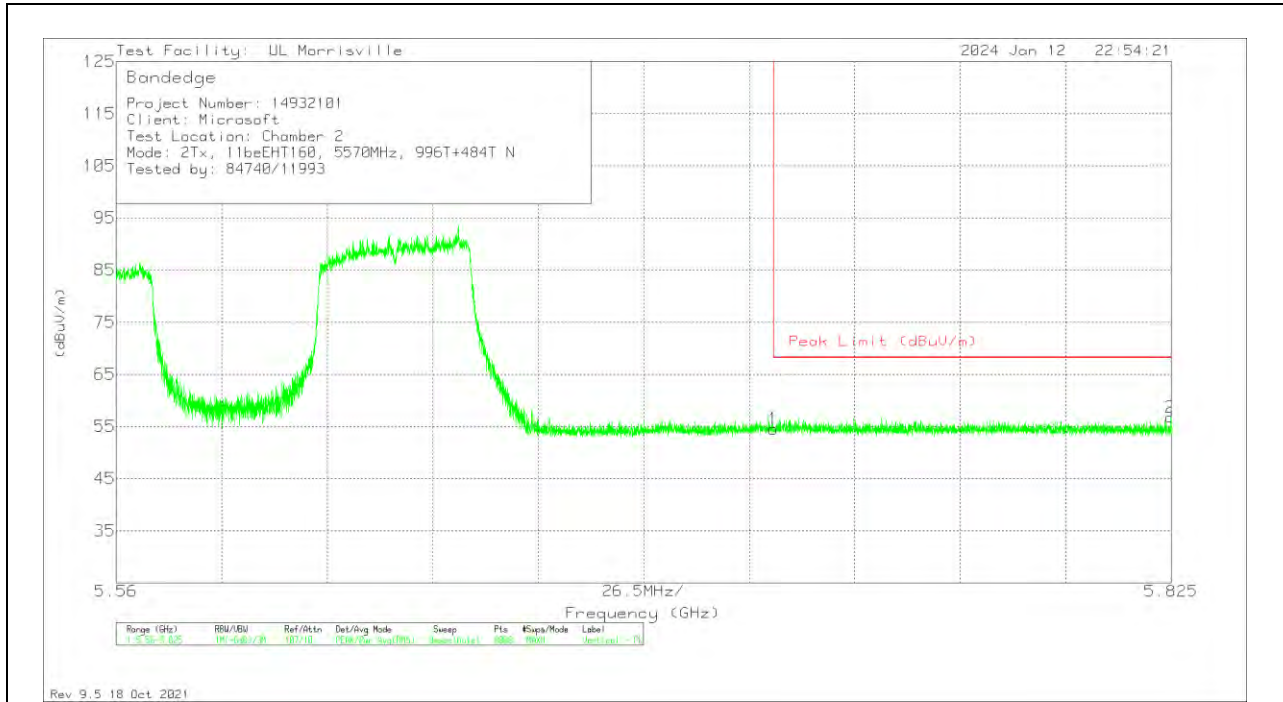


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	32.83	Pk	34.7	-23	10	54.53	68.2	-13.67	287	362	V
2	5.8249	34.86	Pk	34.8	-22.9	10	56.76	68.2	-11.44	287	362	V

Pk - Peak detector

2TX CDD MODE – 2x996T

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

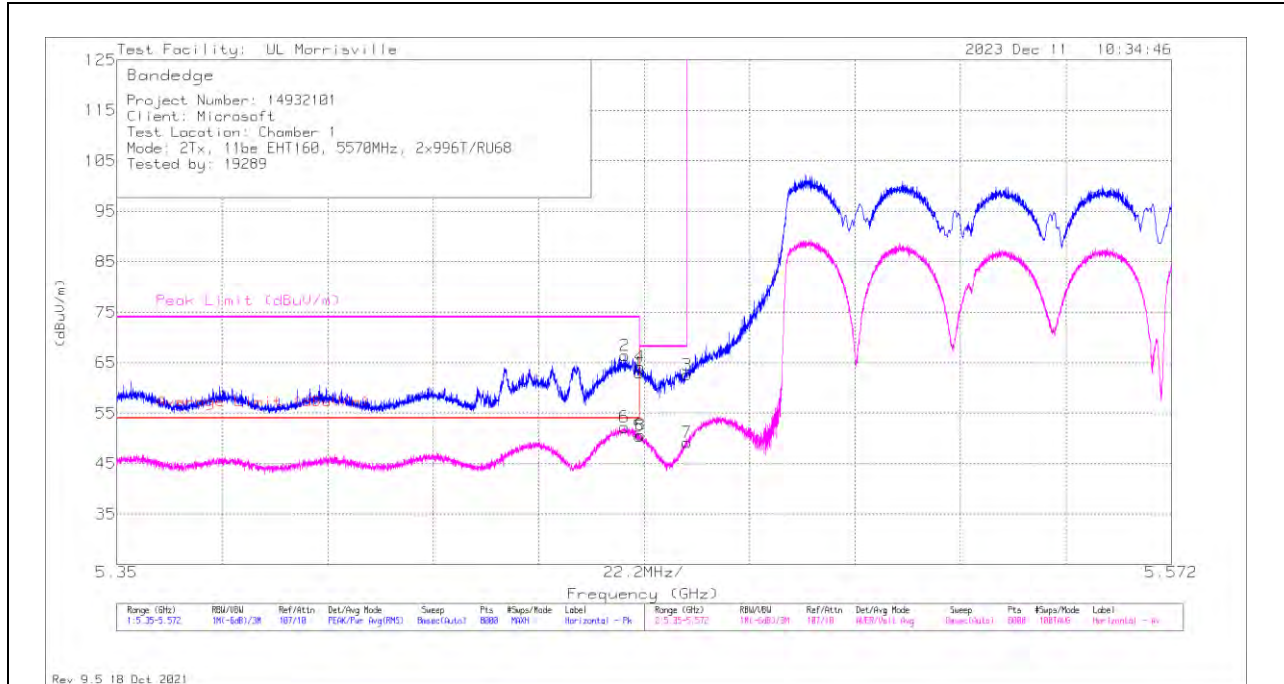

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	41.87	Pk	34.4	-23.3	10	62.97	-	-	74	-11.03	13	307	H
2	*** 5.45699	45.33	Pk	34.4	-23.3	10	66.43	-	-	74	-7.57	13	307	H
5	*** 5.45999	29.33	ADV	34.4	-23.3	10	50.43	54	-3.57	-	-	13	307	H
6	*** 5.45682	31.02	ADV	34.4	-23.2	10	52.22	54	-1.78	-	-	13	307	H
4	5.4601	43.1	Pk	34.4	-23.3	10	64.2	-	-	68.2	-4	13	307	H
8	5.46032	29.56	ADV	34.4	-23.3	10	50.66	-	-	-	-	13	307	H
3	5.46998	41.34	Pk	34.4	-23.2	10	62.54	-	-	68.2	-5.66	13	307	H
7	5.46998	28	ADV	34.4	-23.2	10	49.2	-	-	-	-	13	307	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

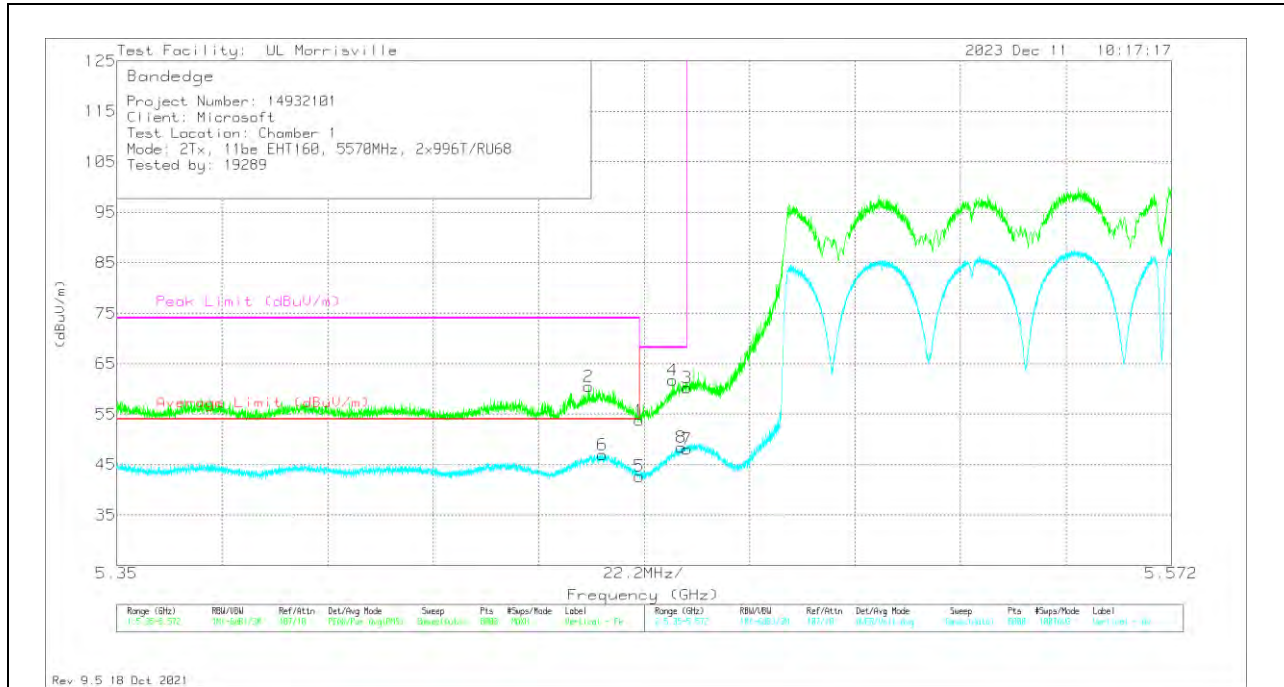


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	32.62	Pk	34.4	-23.3	10	53.72	-	-	74	-20.28	336	256	V
2	*** 5.44927	39.28	Pk	34.4	-23.2	10	60.48	-	-	74	-13.52	336	256	V
5	*** 5.45999	21.56	ADV	34.4	-23.3	10	42.66	54	-11.34	-	-	336	256	V
6	*** 5.45219	25.79	ADV	34.4	-23.2	10	46.99	54	-7.01	-	-	336	256	V
4	5.46701	40.6	Pk	34.4	-23.3	10	61.7	-	-	68.2	-6.5	336	256	V
8	5.46884	27.36	ADV	34.4	-23.3	10	48.46	-	-	-	-	336	256	V
3	5.46998	39.01	Pk	34.4	-23.2	10	60.21	-	-	68.2	-7.99	336	256	V
7	5.46998	26.88	ADV	34.4	-23.2	10	48.08	-	-	-	-	336	256	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

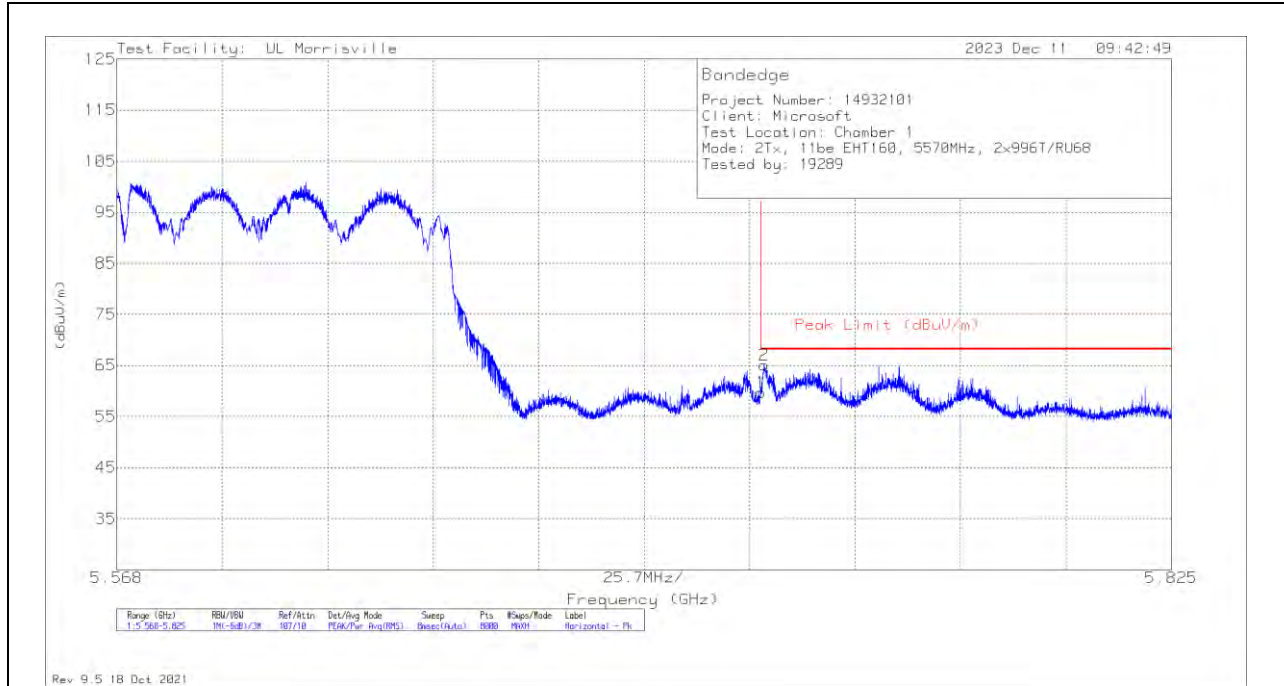

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	38.21	Pk	34.5	-23	10	59.71	68.2	-8.49	271	362	H
2	5.72579	43.56	Pk	34.5	-23	10	65.06	68.2	-3.14	271	362	H

Pk - Peak detector

VERTICAL RESULT

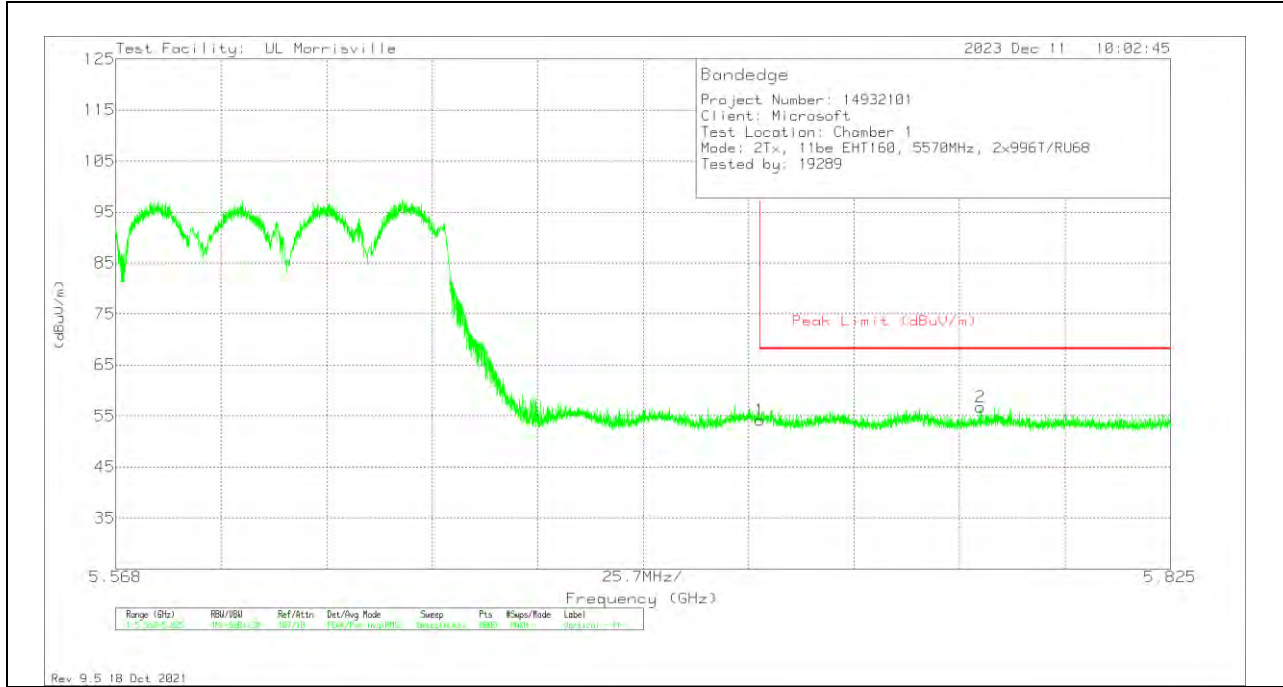

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	32.64	Pk	34.5	-23	10	54.14	68.2	-14.06	8	289	V
2	5.77867	35.3	Pk	34.6	-23.1	10	56.8	68.2	-11.4	8	289	V


Pk - Peak detector

10.1.26. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

2TX CDD MODE

BANDEDGE (LOW EDGE)


HORIZONTAL RESULT

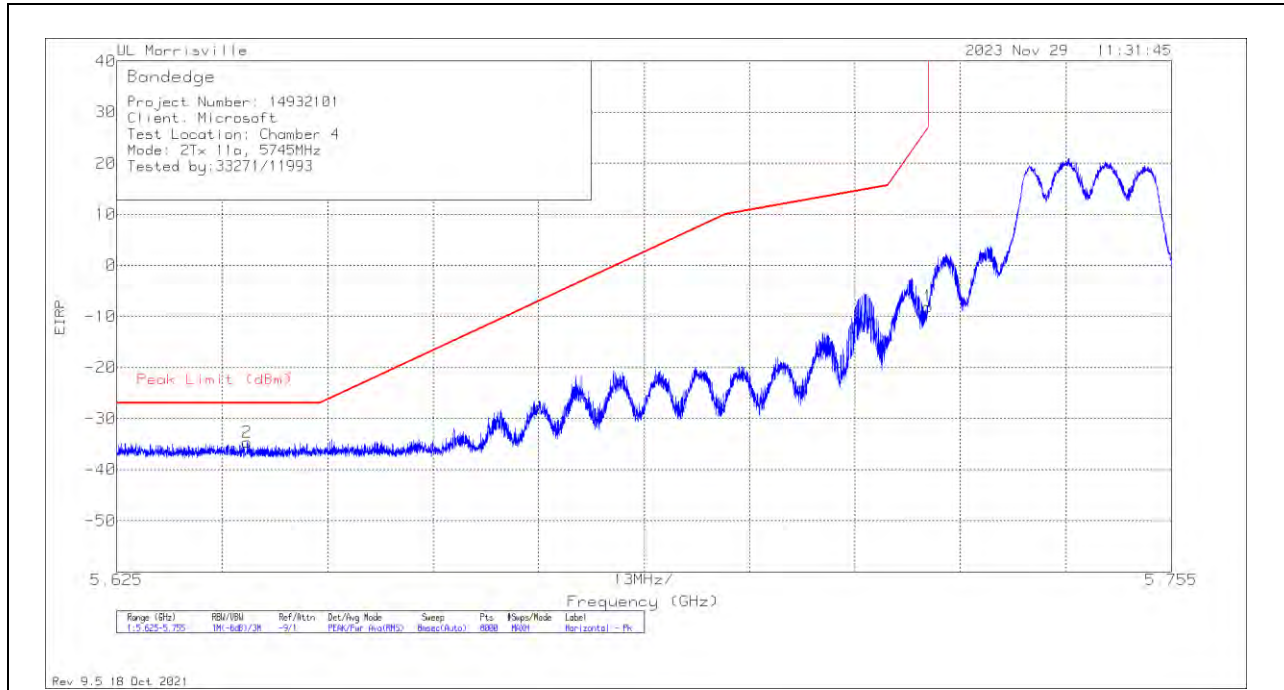

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64109	-82.61	Pk	34.7	-8.7	11.8	10.2	-34.61	-27	-7.61	318	365	H
1	5.725	-56.05	Pk	34.7	-8.7	11.8	10.2	-8.05	27	-35.05	318	365	H

Pk - Peak detector

VERTICAL RESULT

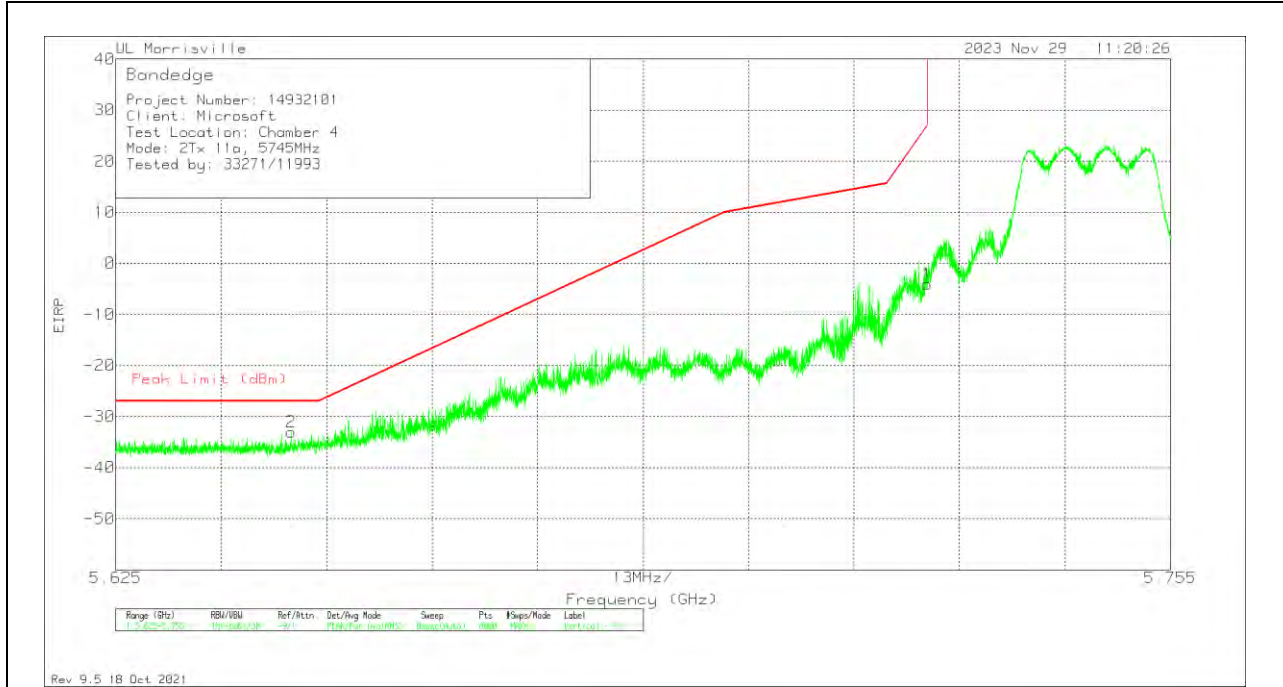


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64662	-81	Pk	34.7	-8.7	11.8	10.2	-33	-27	-6	47	278	V
1	5.725	-52.02	Pk	34.7	-8.7	11.8	10.2	-4.02	27	-31.02	47	278	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

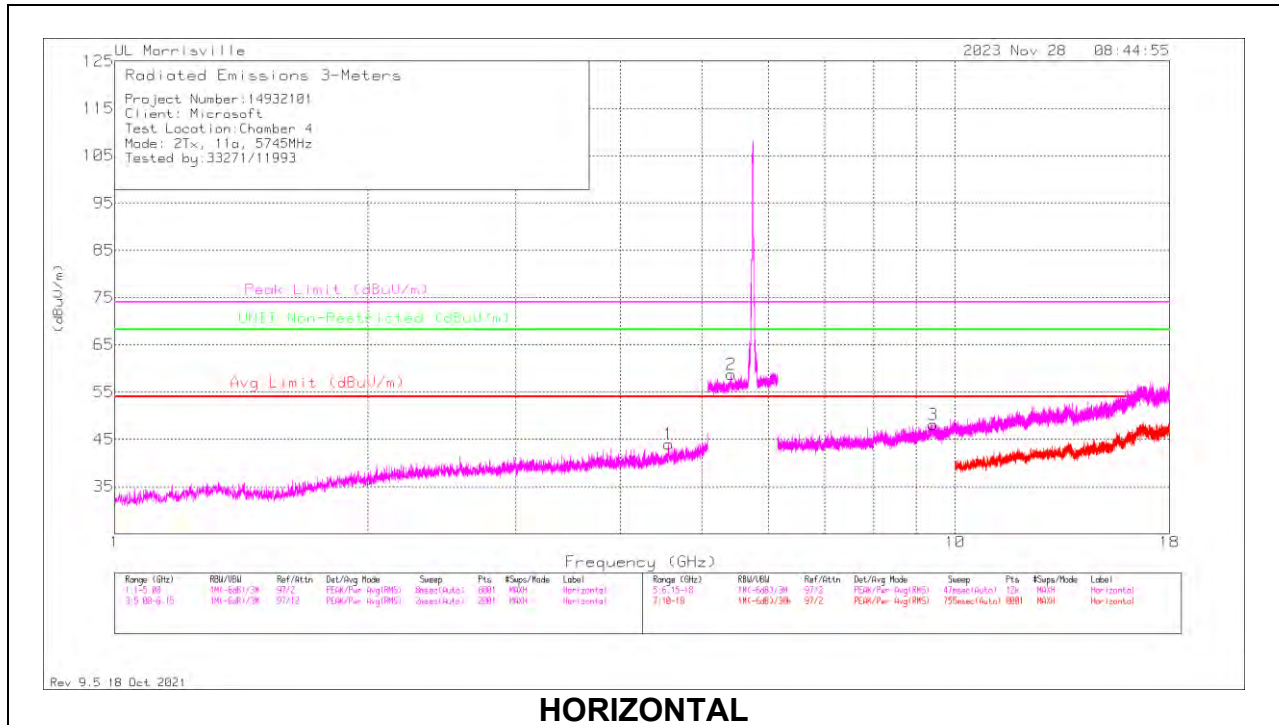

HORIZONTAL

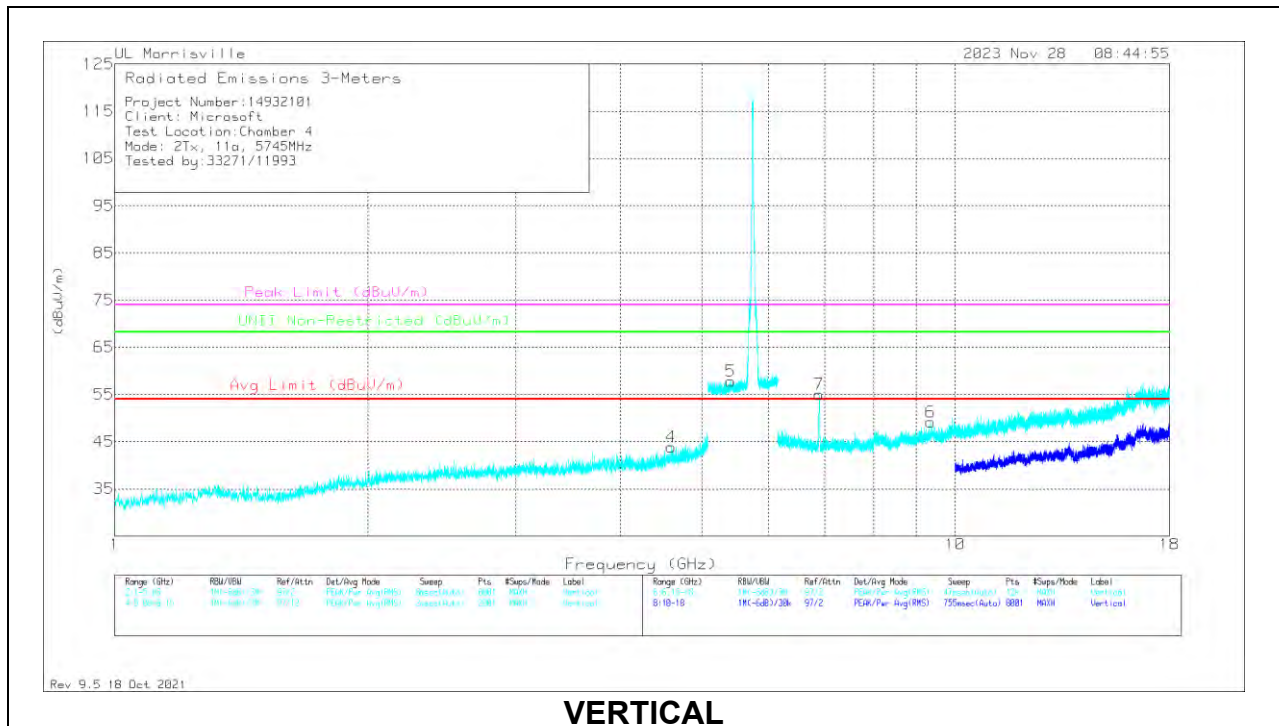

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.56048	41.18	Pk	33.9	-31.1	43.98	54	-10.02	74	-30.02	-	-	0-360	100	H
4	*** 4.59652	40.94	Pk	34.1	-31.2	43.84	54	-10.16	74	-30.16	-	-	0-360	200	V
2	*** 5.4152	32.83	PK-U	34.6	-8.8	58.63	-	-	74	-15.37	-	-	202	170	H
	*** 5.4177	20.42	ADV	34.6	-8.8	46.22	54	-7.78	-	-	-	-	202	170	H
5	*** 5.40926	33.55	PK-U	34.6	-8.8	59.35	-	-	74	-14.65	-	-	71	312	V
	*** 5.40982	20.74	ADV	34.6	-8.9	46.44	54	-7.56	-	-	-	-	71	312	V
3	*** 9.42723	37.57	PK-U	36.7	-25.4	48.87	-	-	74	-25.13	-	-	231	235	H
	*** 9.42502	25.41	ADV	36.7	-25.3	36.81	54	-17.19	-	-	-	-	231	235	H
6	*** 9.3524	37.72	PK-U	36.5	-25.7	48.52	-	-	74	-25.48	-	-	310	113	V
	*** 9.35091	25.4	ADV	36.5	-25.8	36.1	54	-17.9	-	-	-	-	310	113	V
7	6.88766	47.27	Pk	35.5	-27.8	54.97	-	-	-	-	68.2	-13.23	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL RESULTS

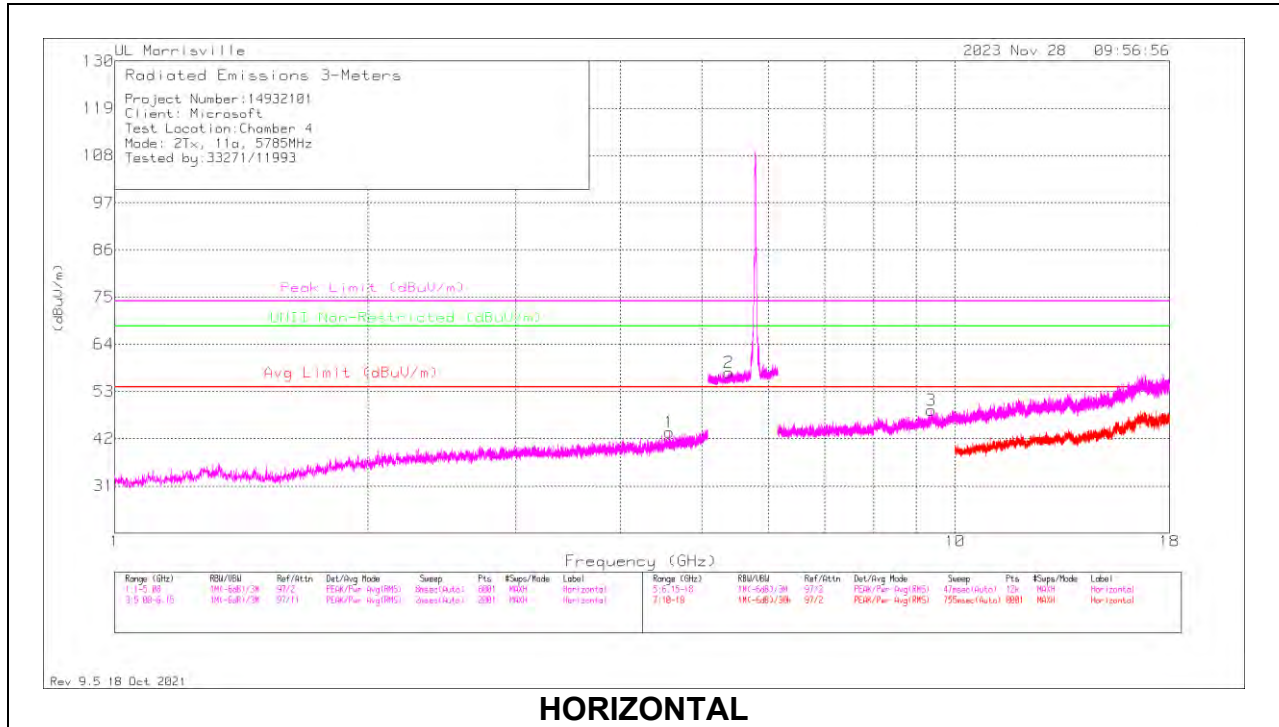

HORIZONTAL

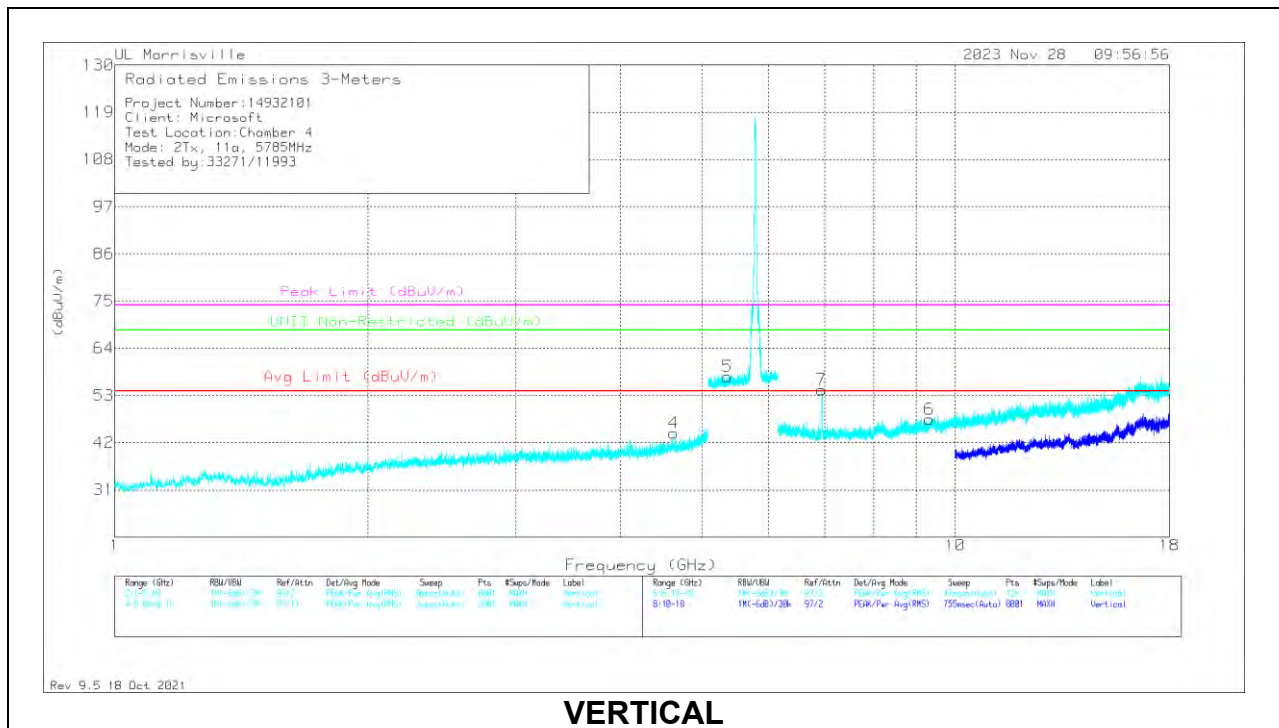


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.57272	40.88	Pk	34	-31.4	43.48	54	-10.52	74	-30.52	-	-	0-360	100	H
4	*** 4.62848	40.97	Pk	34.1	-30.8	44.27	54	-9.73	74	-29.73	-	-	0-360	200	V
2	*** 5.38245	33.25	PK-U	34.5	-9.2	58.55	-	-	74	-15.45	-	-	218	345	H
	*** 5.38344	20.34	ADV	34.5	-9.2	45.64	54	-8.36	-	-	-	-	218	345	H
5	*** 5.36394	33.44	PK-U	34.5	-9.2	58.74	-	-	74	-15.26	-	-	59	121	V
	*** 5.36534	20.76	ADV	34.5	-9.1	46.16	54	-7.84	-	-	-	-	59	121	V
3	*** 9.38029	37.21	PK-U	36.6	-25.2	48.61	-	-	74	-25.39	-	-	13	229	H
	*** 9.37843	25.18	ADV	36.6	-25.3	36.48	54	-17.52	-	-	-	-	13	229	H
6	*** 9.33074	36.56	Pk	36.5	-25.6	47.46	54	-6.54	74	-26.54	-	-	0-360	200	V
7	6.94	46.89	Pk	35.5	-28.1	54.29	-	-	-	-	68.2	-13.91	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADV - Linear Voltage Average

HIGH CHANNEL RESULTS

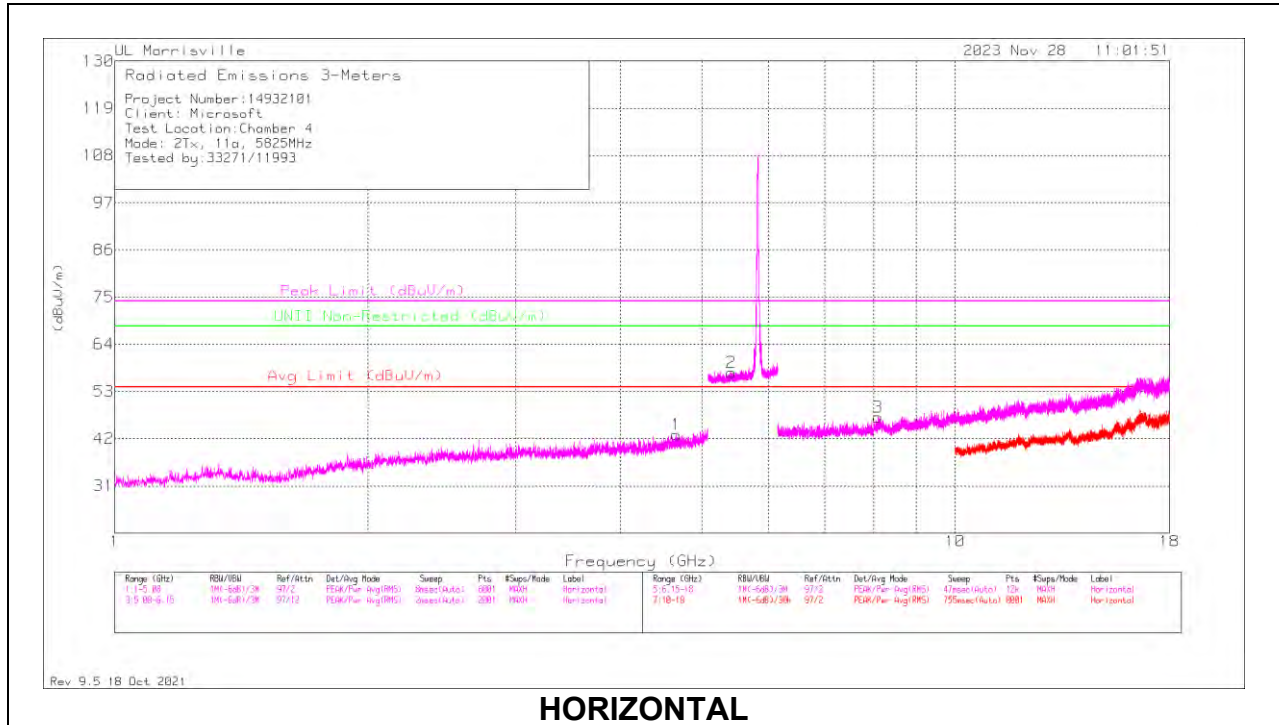

HORIZONTAL

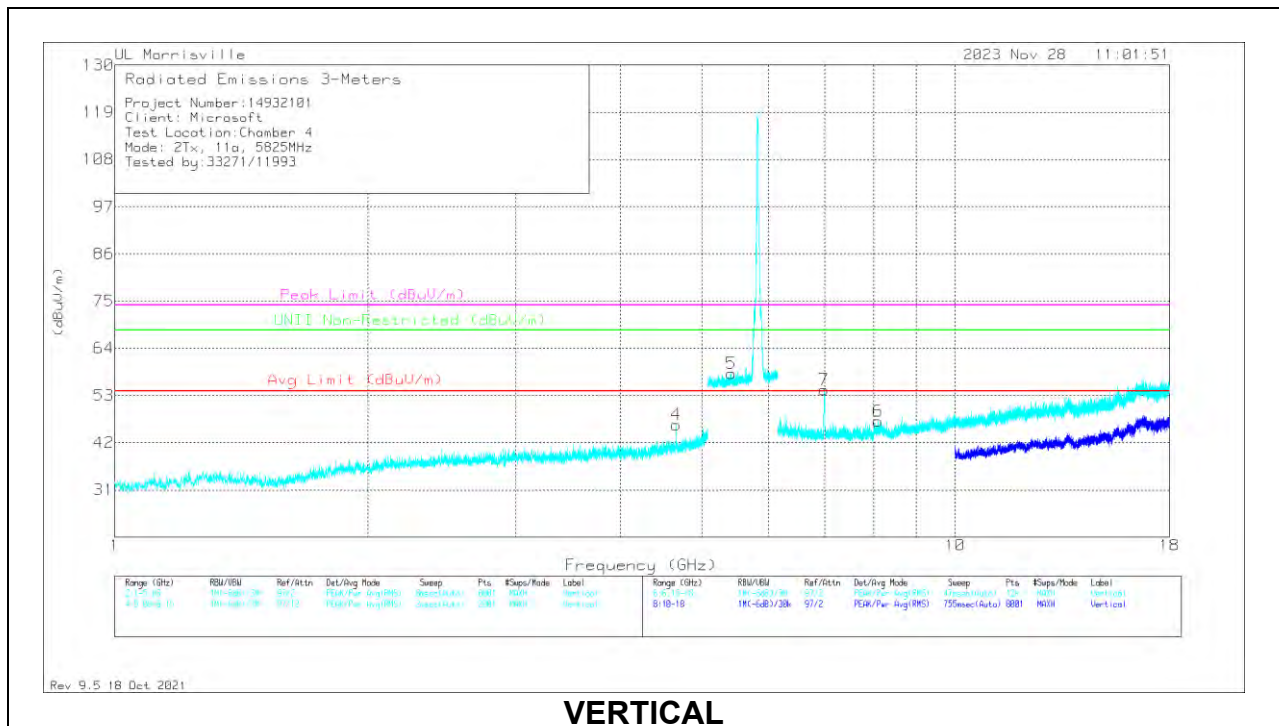

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.65772	39.87	Pk	34.1	-31	42.97	54	-11.03	74	-31.03	-	-	0-360	100	H
4	*** 4.66044	43.21	Pk	34.1	-31.1	46.21	54	-7.79	74	-27.79	-	-	0-360	200	V
2	*** 5.41859	33.01	PK-U	34.6	-8.9	58.71	-	-	74	-15.29	-	-	19	240	H
	*** 5.42132	20.29	ADV	34.6	-8.9	45.99	54	-8.01	-	-	-	-	19	240	H
5	*** 5.4236	32.85	PK-U	34.6	-9	58.45	-	-	74	-15.55	-	-	25	292	V
	*** 5.42501	20.71	ADV	34.6	-9	46.31	54	-7.69	-	-	-	-	25	292	V
3	*** 8.09538	38.09	Pk	35.8	-26.9	46.99	54	-7.01	74	-27.01	-	-	0-360	100	H
6	*** 8.09538	38.17	Pk	35.8	-26.9	47.07	54	-6.93	74	-26.93	-	-	0-360	200	V
7	6.98641	46.72	Pk	35.5	-27.9	54.32	-	-	-	-	68.2	-13.88	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK-U - Maximum Peak


ADV - Linear Voltage Average

10.1.27. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

2TX CDD MODE

BANDEDGE (LOW EDGE)


HORIZONTAL RESULT

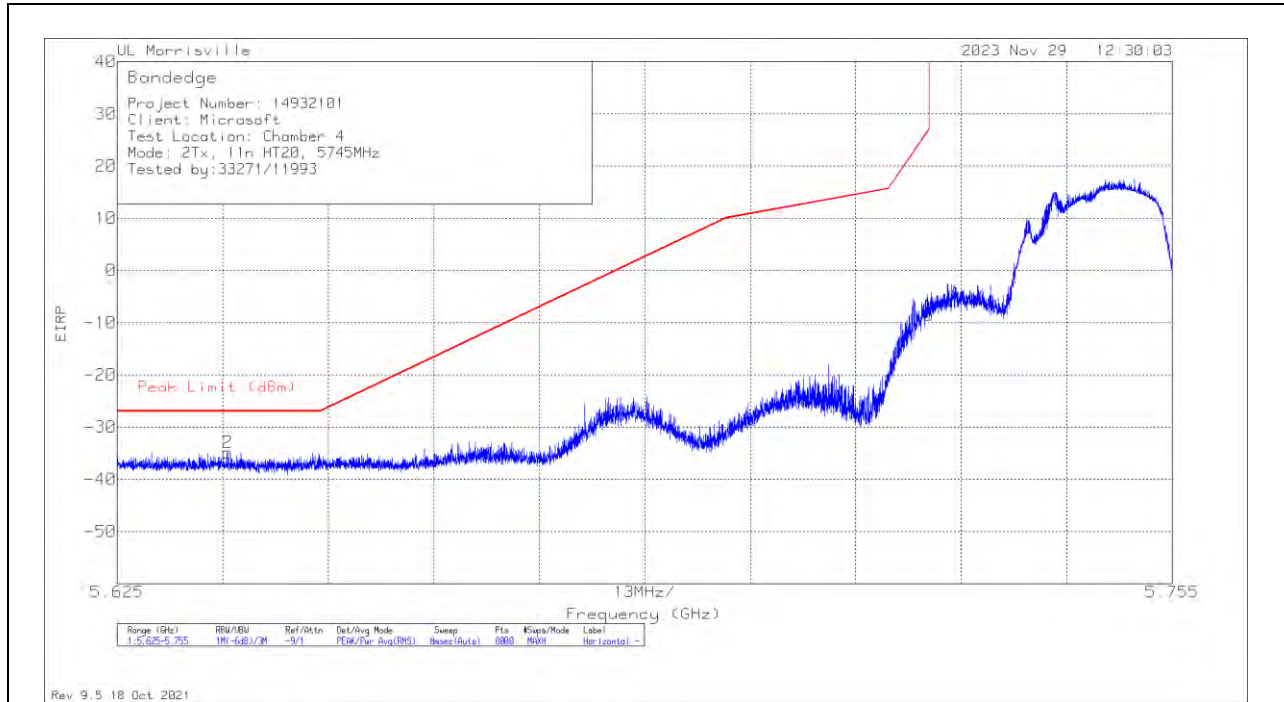

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63859	-83.08	Pk	34.7	-8.5	11.8	10.2	-34.88	-27	-7.88	297	134	H
1	5.725	-56.53	Pk	34.7	-8.7	11.8	10.2	-8.53	27	-35.53	297	134	H

Pk - Peak detector

VERTICAL RESULT

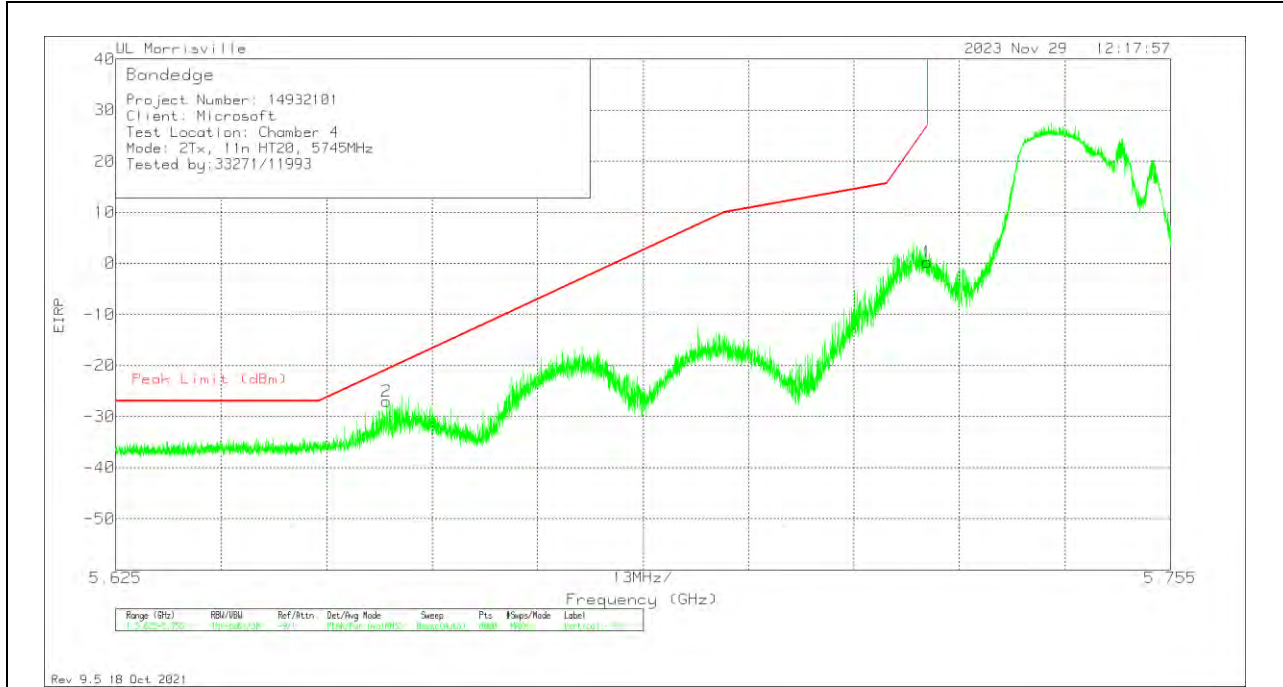

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65835	-74.88	Pk	34.7	-8.7	11.8	10.1	-26.98	-20.82	-6.16	25	142	V
1	5.725	-47.75	Pk	34.7	-8.7	11.8	10.2	.25	27	-26.75	25	142	V


Pk - Peak detector

10.1.28. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

2TX CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

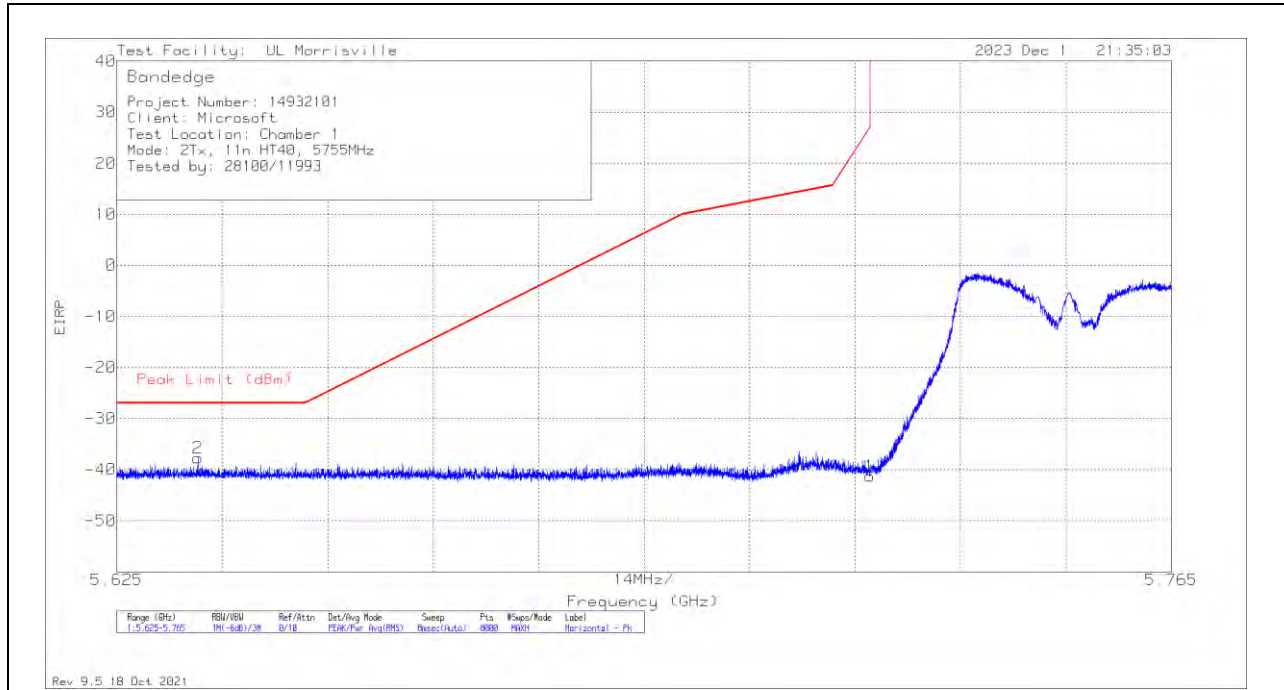

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63576	-71.12	Pk	34.4	-22.8	11.8	10	-37.72	-27	-10.72	329	250	H
1	5.72499	-74.58	Pk	34.5	-23	11.8	10	-41.28	26.97	-68.25	329	250	H

Pk - Peak detector

VERTICAL RESULT

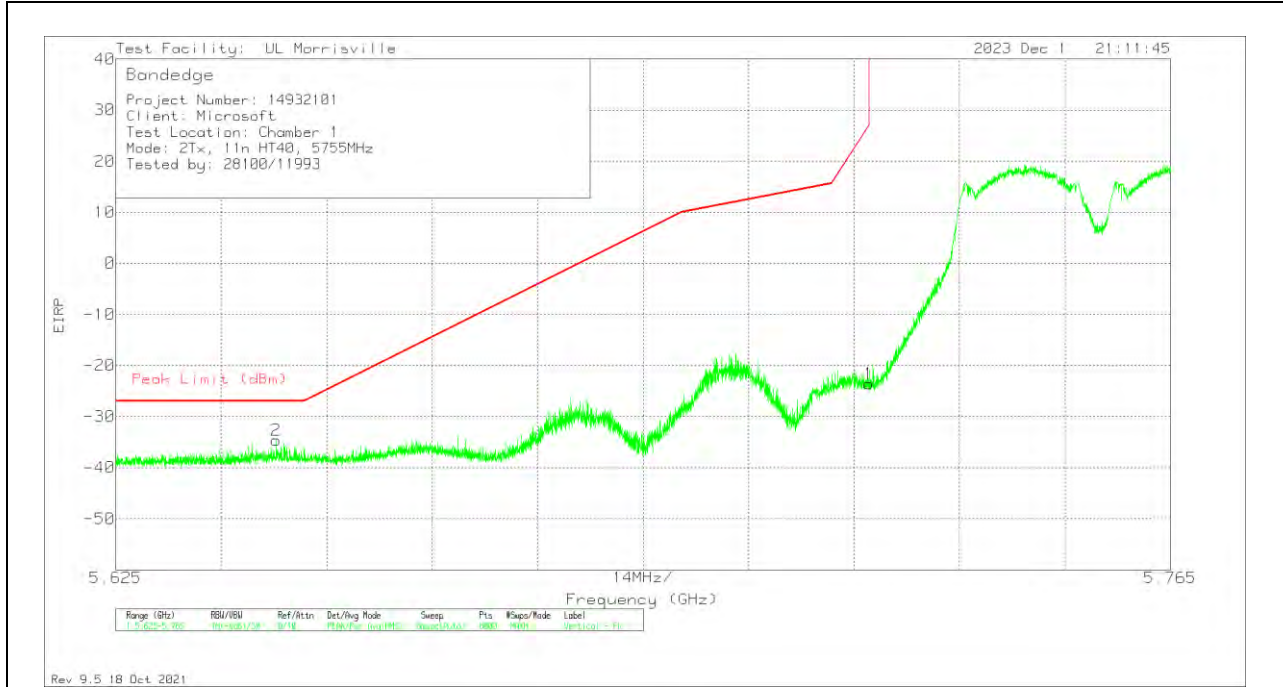

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64626	-67.83	Pk	34.4	-23	11.8	10	-34.63	-27	-7.63	329	250	V
1	5.72499	-56.92	Pk	34.5	-23	11.8	10	-23.62	26.97	-50.59	329	250	V


Pk - Peak detector

10.1.29. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

2TX CDD MODE

BANDEDGE (LOW EDGE)


HORIZONTAL RESULT

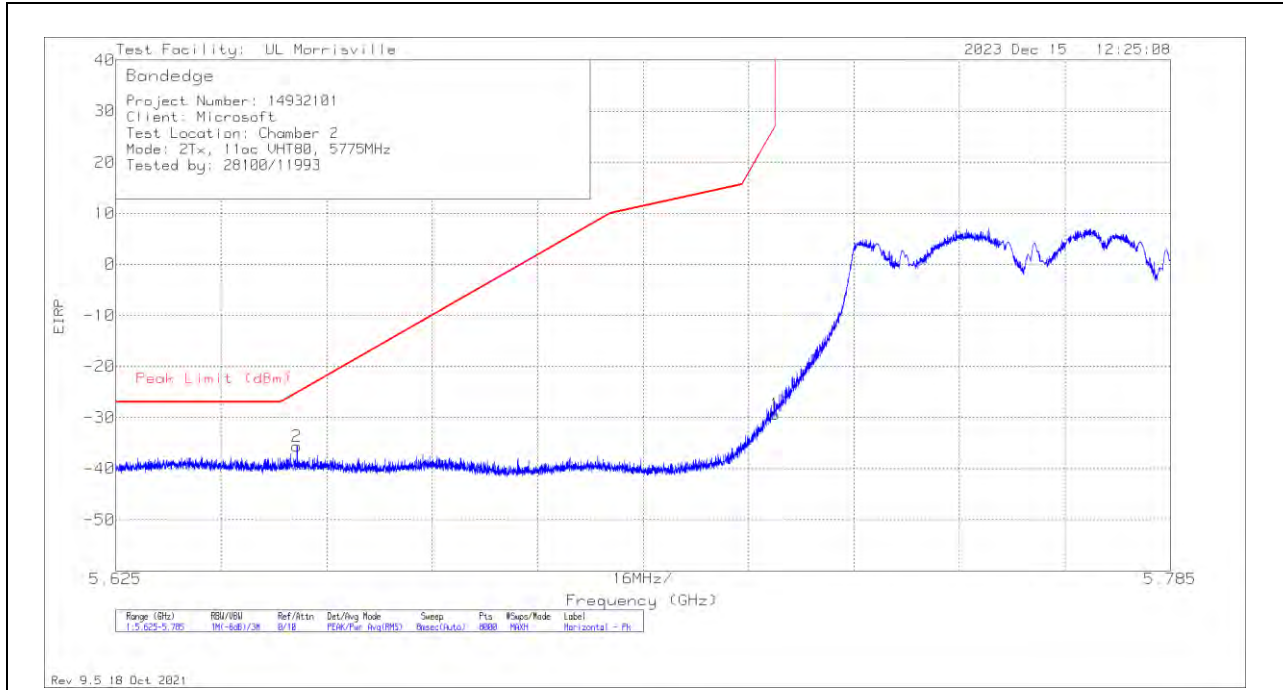

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6525	-69.05	Pk	34.6	-23	11.8	10	-35.65	-25.15	-10.5	102	379	H
1	5.725	-62.7	Pk	34.6	-23	11.8	10	-29.3	26.99	-56.29	102	379	H

Pk - Peak detector

VERTICAL RESULT

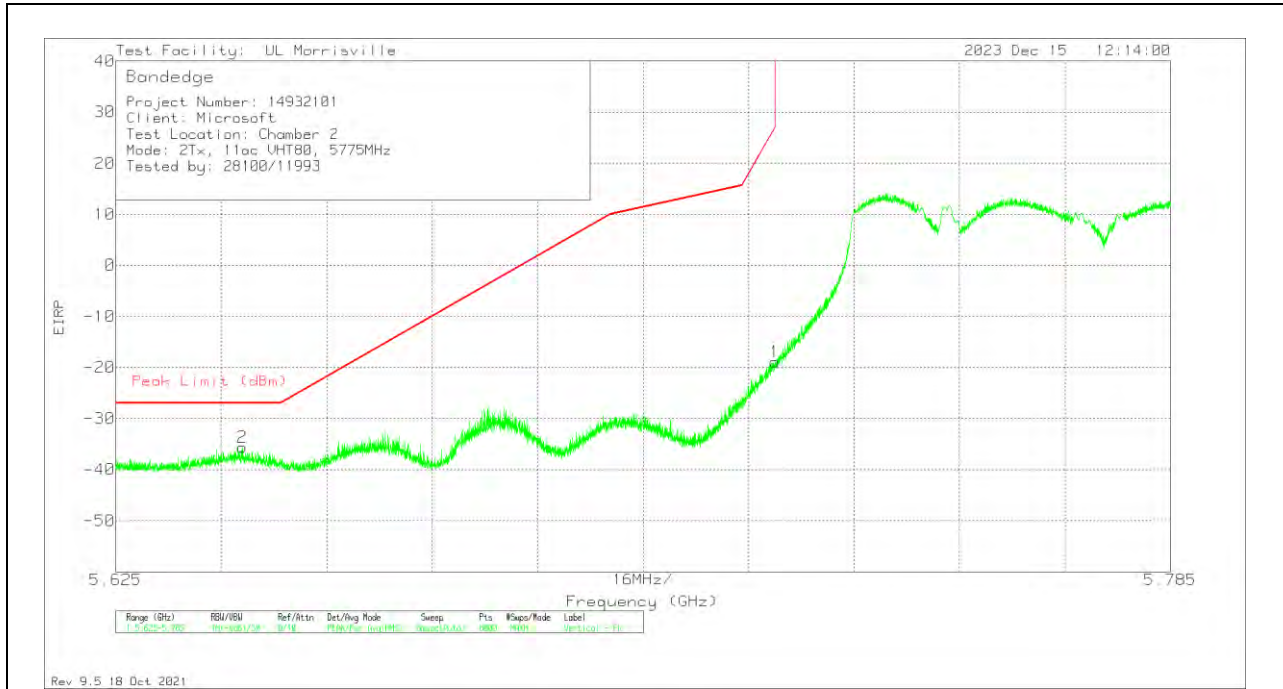

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64422	-69.04	Pk	34.6	-23	11.8	10	-35.64	-27	-8.64	18	309	V
1	5.725	-52.33	Pk	34.6	-23	11.8	10	-18.93	26.99	-45.92	18	309	V


Pk - Peak detector

10.1.30. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE 5.8 GHz BAND

2TX CDD MODE – 26T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

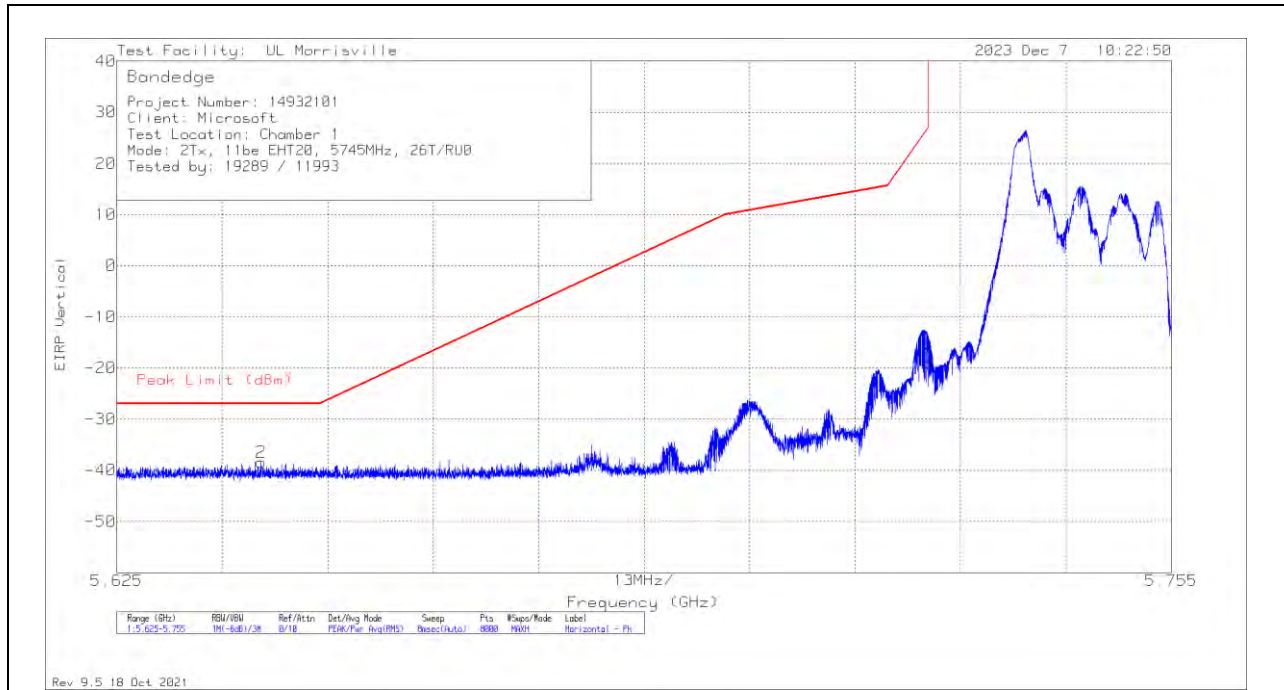

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6428	-71.7	Pk	34.4	-22.9	11.8	10	-38.4	-27	-11.4	282	362	H
1	5.725	-52.35	Pk	34.5	-23	11.8	10	-19.05	27	-46.05	282	362	H

Pk - Peak detector

VERTICAL RESULT


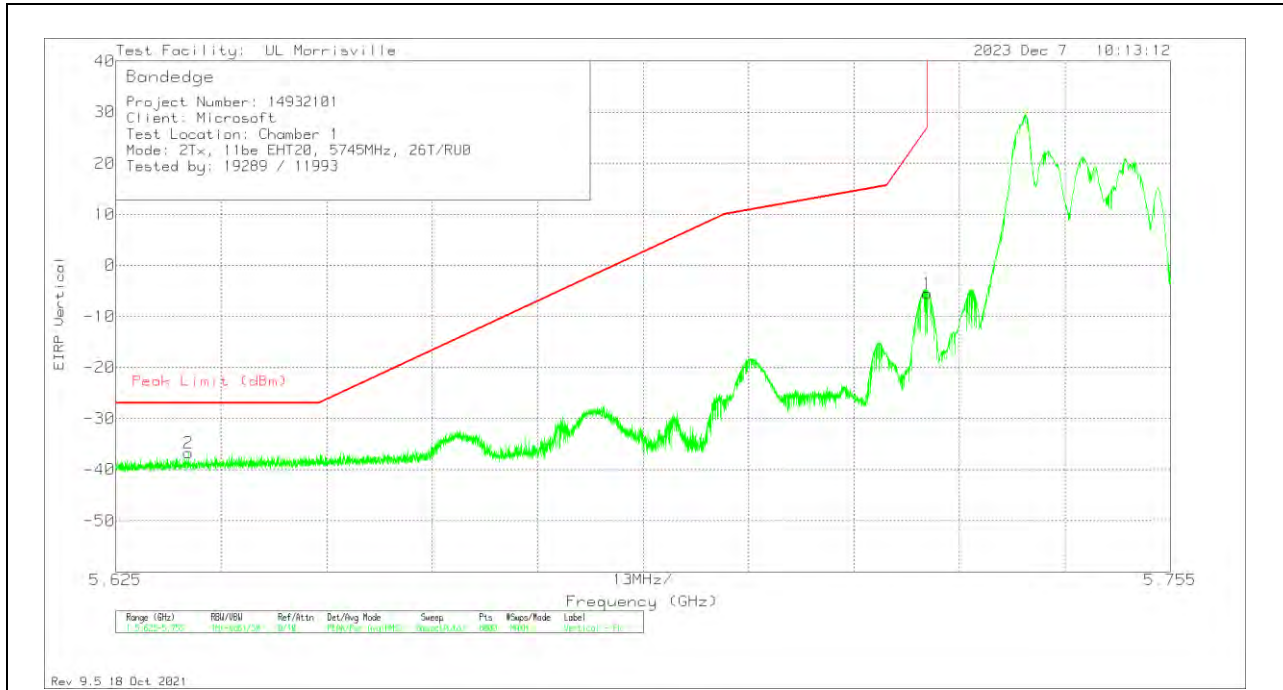


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63397	-70.07	Pk	34.4	-22.8	11.8	10	-36.67	-27	-9.67	320	241	V
1	5.725	-38.8	Pk	34.5	-23	11.8	10	-5.5	27	-32.5	320	241	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

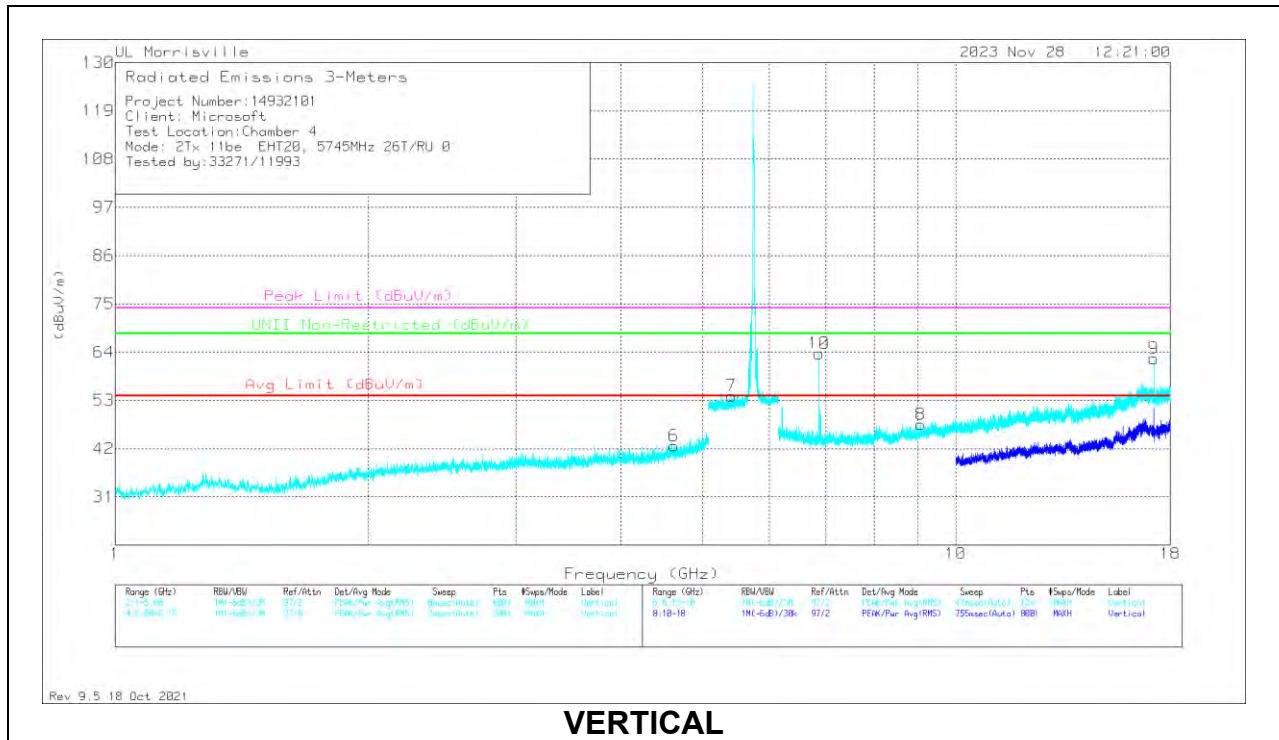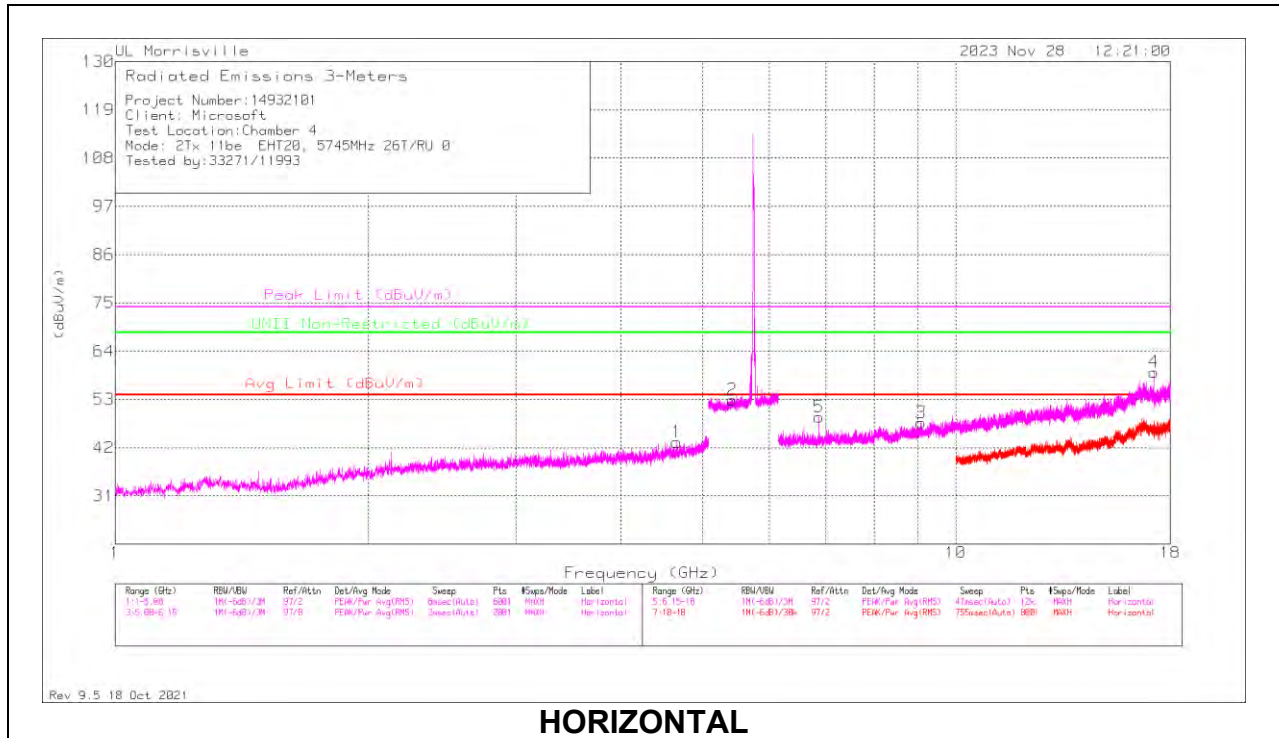

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.655	39.96	Pk	34.1	-30.8	43.26	54	-10.74	74	-30.74	-	-	0-360	100	H
6	*** 4.621	39.44	Pk	34.1	-30.9	42.64	54	-11.36	74	-31.36	-	-	0-360	200	V
2	*** 5.421	28.8	PK-U	34.6	-8.9	54.5	-	-	74	-19.5	-	-	95	308	H
	*** 5.42358	16.08	ADV	34.6	-9	41.68	54	-12.32	-	-	-	-	95	308	H
7	*** 5.40803	29.36	PK-U	34.6	-8.8	55.16	-	-	74	-18.84	-	-	37	392	V
	*** 5.40991	16.95	ADV	34.6	-8.9	42.65	54	-11.35	-	-	-	-	37	392	V
3	*** 9.09275	36.59	Pk	36.3	-25.2	47.69	54	-6.31	74	-26.31	-	-	0-360	200	H
8	*** 9.08386	36.6	Pk	36.3	-25.4	47.5	54	-6.5	74	-26.5	-	-	0-360	100	V
10	6.87691	52.82	PK-U	35.5	-27.6	60.72	-	-	-	-	68.2	-7.48	207	152	V
5	6.87779	41.18	Pk	35.5	-27.7	48.98	54	-5.02	74	-25.02	68.2	-19.22	0-360	200	H
9	17.21049	41.4	PK-U	41.3	-19.8	62.9	-	-	-	-	68.2	-5.3	236	136	V
4	17.21	37.6	Pk	41.3	-19.7	59.2	-	-	-	-	68.2	-9	0-360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL RESULTS

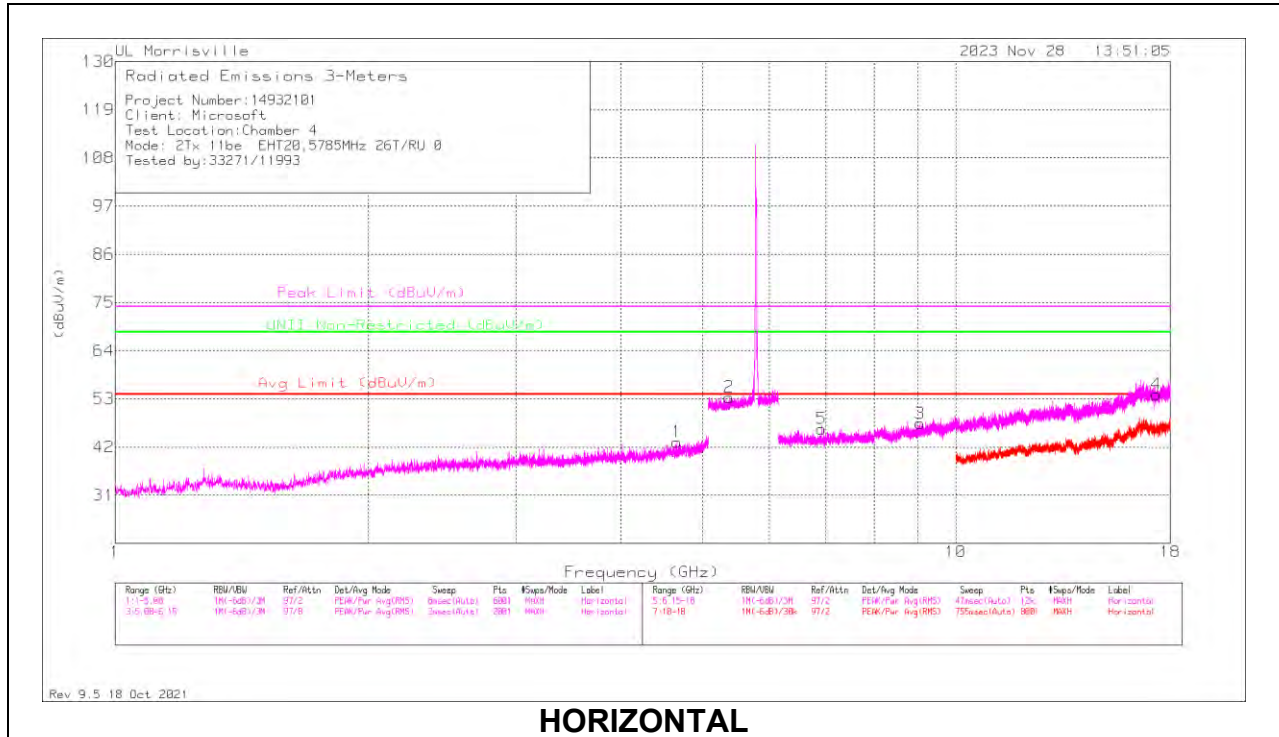

HORIZONTAL

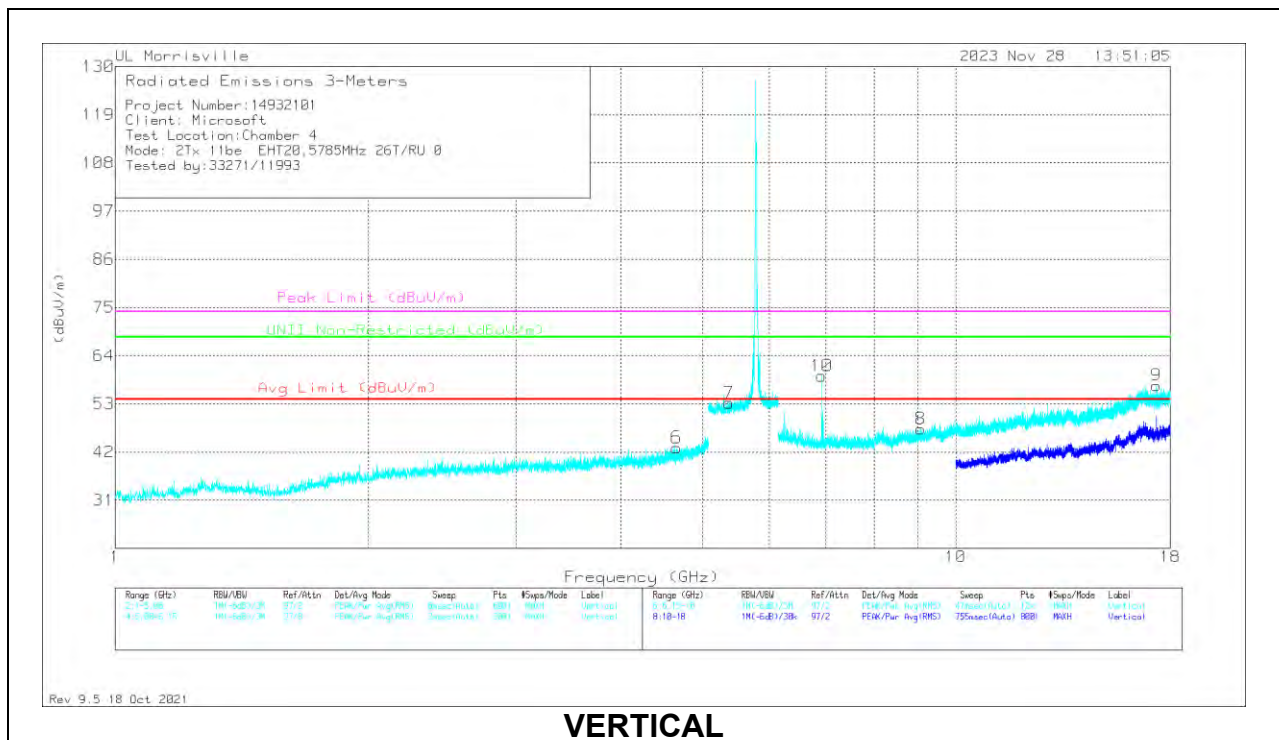

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.65704	40.01	Pk	34.1	-31	43.11	54	-10.89	74	-30.89	-	-	0-360	100	H
6	*** 4.65432	39.68	Pk	34.1	-30.8	42.98	54	-11.02	74	-31.02	-	-	0-360	200	V
2	*** 5.37494	29.14	PK-U	34.5	-9.1	54.54	-	-	74	-19.46	-	-	215	171	H
	*** 5.37834	16.31	ADV	34.5	-9.3	41.51	54	-12.49	-	-	-	-	215	171	H
7	*** 5.37326	29.73	PK-U	34.5	-9	55.23	-	-	74	-18.77	-	-	345	300	V
	*** 5.37178	16.9	ADV	34.5	-9.1	42.3	54	-11.7	-	-	-	-	345	300	V
3	*** 9.06905	36.47	Pk	36.2	-25.3	47.37	54	-6.63	74	-26.63	-	-	0-360	100	H
8	*** 9.08288	36.37	Pk	36.3	-25.4	47.27	54	-6.73	74	-26.73	-	-	0-360	200	V
5	6.9242	38.57	Pk	35.5	-27.9	46.17	-	-	-	-	68.2	-22.03	0-360	100	H
10	6.92519	51.78	Pk	35.5	-27.9	59.38	-	-	-	-	68.2	-8.82	0-360	200	V
4	17.33048	33.61	Pk	41.2	-20.8	54.01	-	-	-	-	68.2	-14.19	0-360	100	H
9	17.33146	36.91	Pk	41.2	-20.9	57.21	-	-	-	-	68.2	-10.99	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL RESULTS

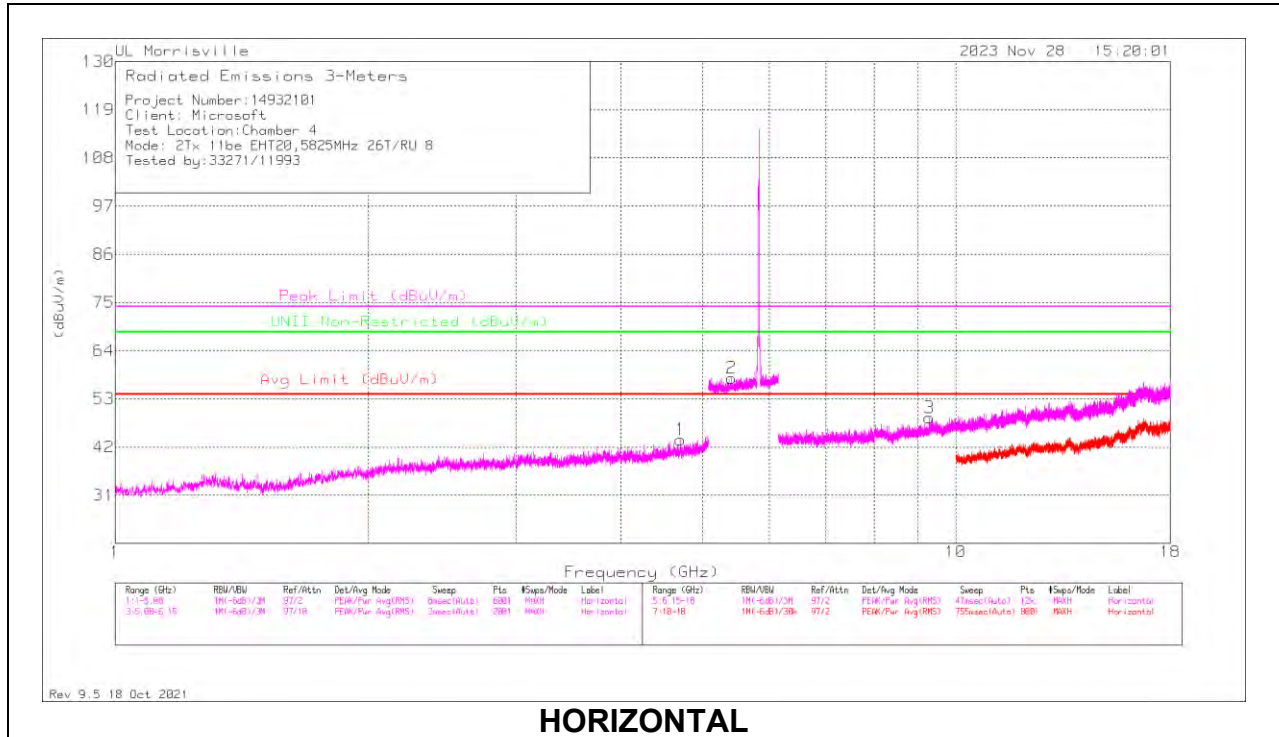

HORIZONTAL

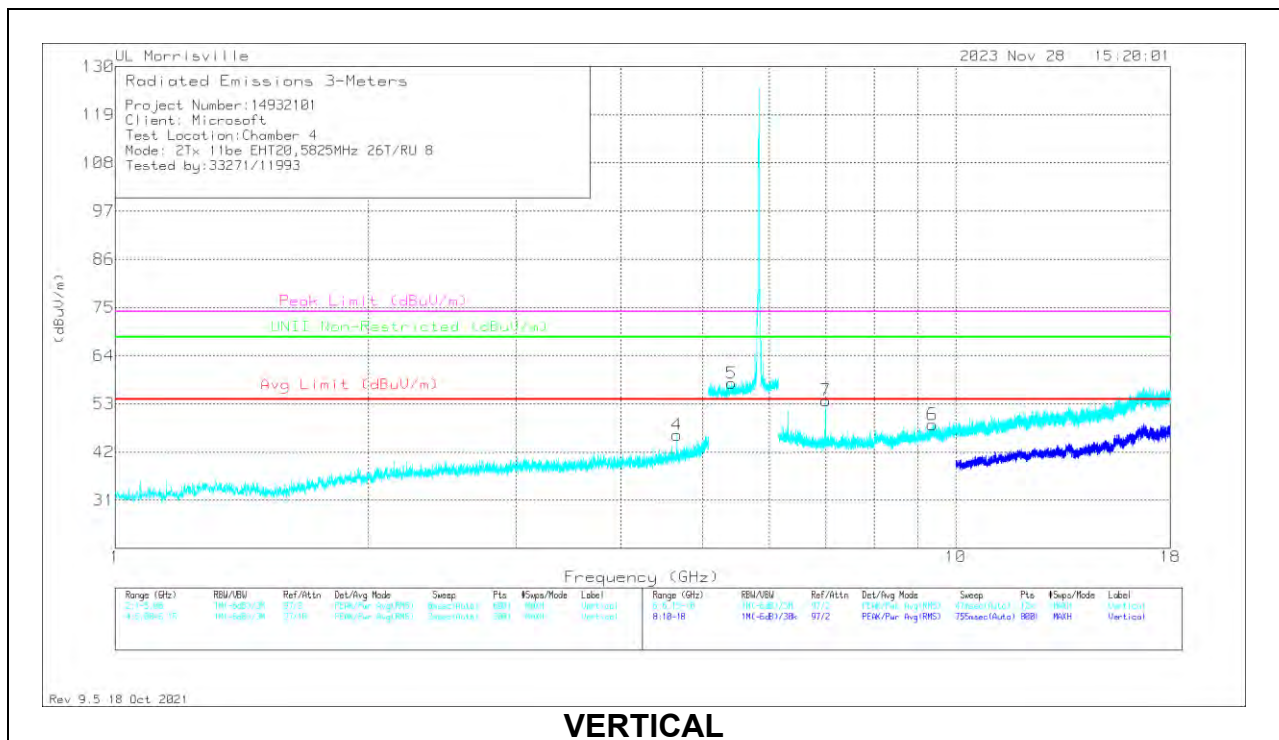

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.70396	40.9	Pk	34.1	-31.3	43.7	54	-10.3	74	-30.3	-	-	0-360	100	H
4	*** 4.66044	42.91	Pk	34.1	-31.1	45.91	54	-8.09	74	-28.09	-	-	0-360	200	V
2	*** 5.41201	32.94	PK-U	34.6	-8.9	58.64	-	-	74	-15.36	-	-	207	162	H
	*** 5.41156	20.1	ADV	34.6	-8.9	45.8	54	-8.2	-	-	-	-	207	162	H
5	*** 5.4158	33.63	PK-U	34.6	-8.8	59.43	-	-	74	-14.57	-	-	359	149	V
	*** 5.41487	21.15	ADV	34.6	-8.8	46.95	54	-7.05	-	-	-	-	359	149	V
3	*** 9.41349	37.2	PK-U	36.6	-25.3	48.5	-	-	74	-25.5	-	-	0	361	H
	*** 9.35205	25.07	ADV	36.5	-25.7	35.87	54	-18.13	-	-	-	-	0	361	H
6	*** 9.38071	37.86	PK-U	36.6	-25.2	49.26	-	-	74	-24.74	-	-	303	229	V
	*** 9.38185	25.51	ADV	36.6	-25.1	37.01	54	-16.99	-	-	-	-	303	229	V
7	7.00616	46.47	Pk	35.5	-28.2	53.77	-	-	-	-	68.2	-14.43	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

2TX CDD MODE – 52T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

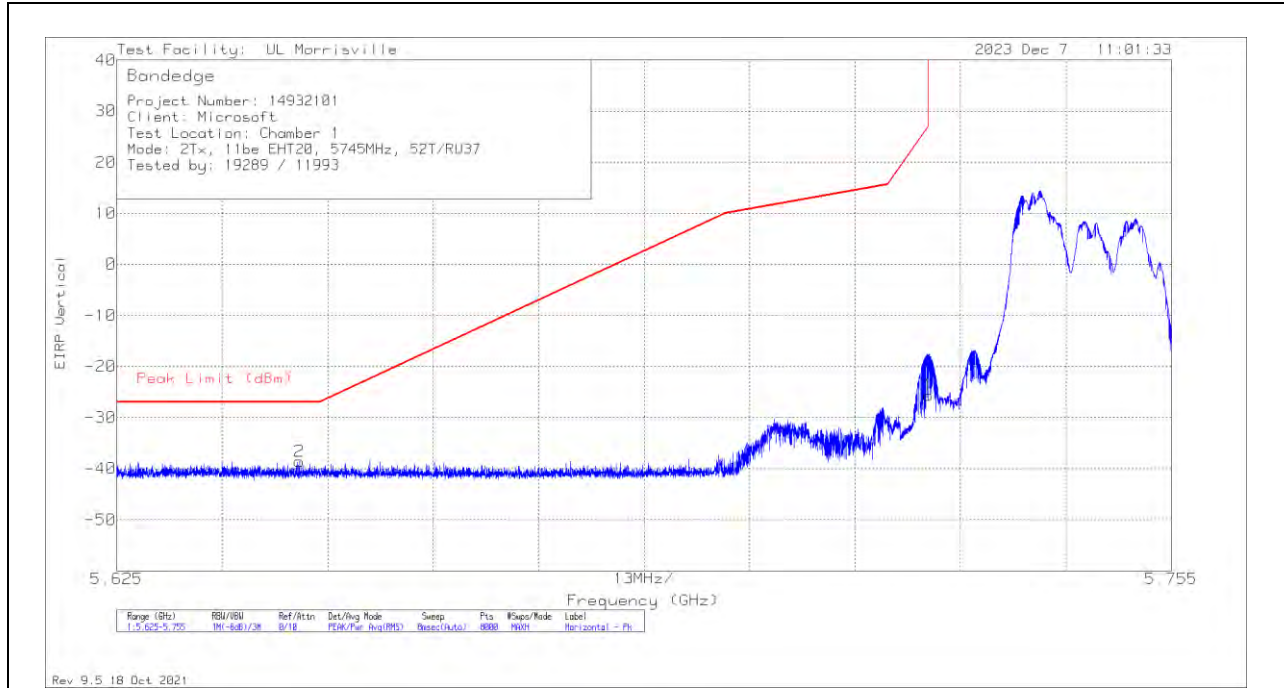

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64751	-71.73	Pk	34.4	-23	11.8	10	-38.53	-27	-11.53	226	267	H
1	5.725	-58.91	Pk	34.5	-23	11.8	10	-25.61	27	-52.61	226	267	H

Pk - Peak detector

VERTICAL RESULT

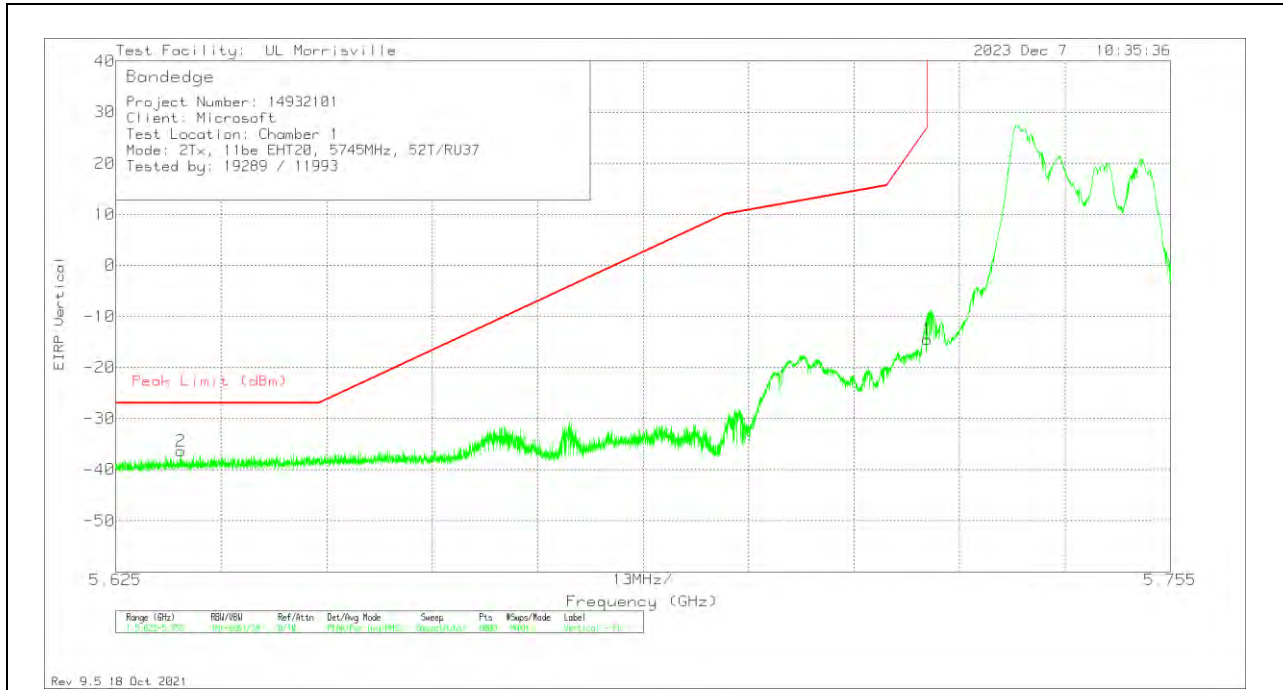


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63303	-69.77	Pk	34.4	-22.8	11.8	10	-36.37	-27	-9.37	315	224	V
1	5.725	-47.78	Pk	34.5	-23	11.8	10	-14.48	27	-41.48	315	224	V

Pk - Peak detector

2TX CDD MODE – 52T+26T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

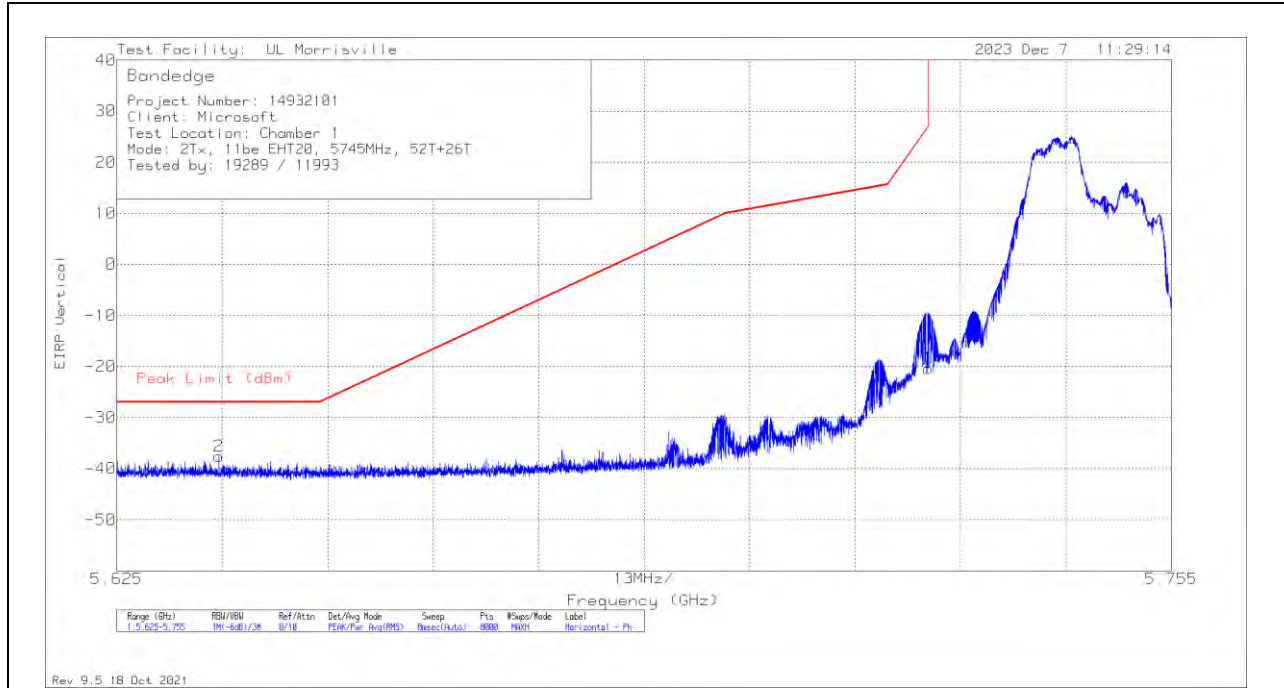

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6376	-70.97	Pk	34.4	-22.8	11.8	10	-37.57	-27	-10.57	38	389	H
1	5.725	-53.73	Pk	34.5	-23	11.8	10	-20.43	27	-47.43	38	389	H

Pk - Peak detector

VERTICAL RESULT

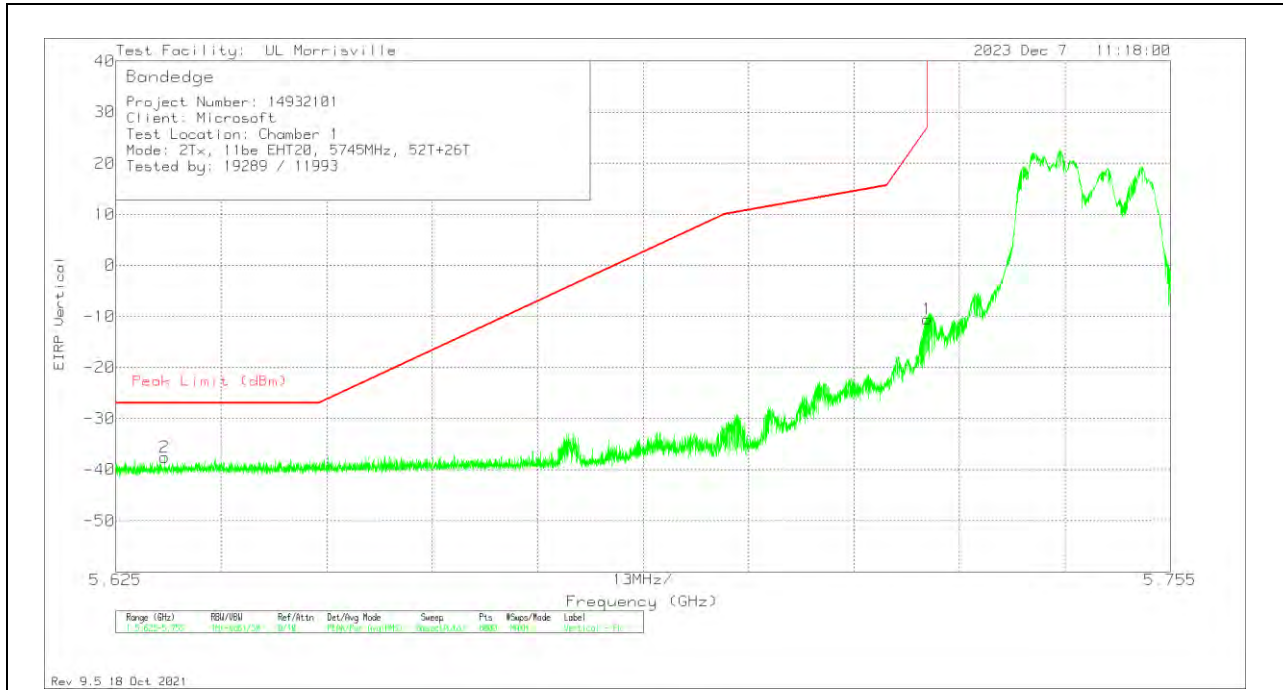


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63101	-70.89	Pk	34.4	-22.9	11.8	10	-37.59	-27	-10.59	314	253	V
1	5.725	-43.85	Pk	34.5	-23	11.8	10	-10.55	27	-37.55	314	253	V

Pk - Peak detector

2TX CDD MODE – 106T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

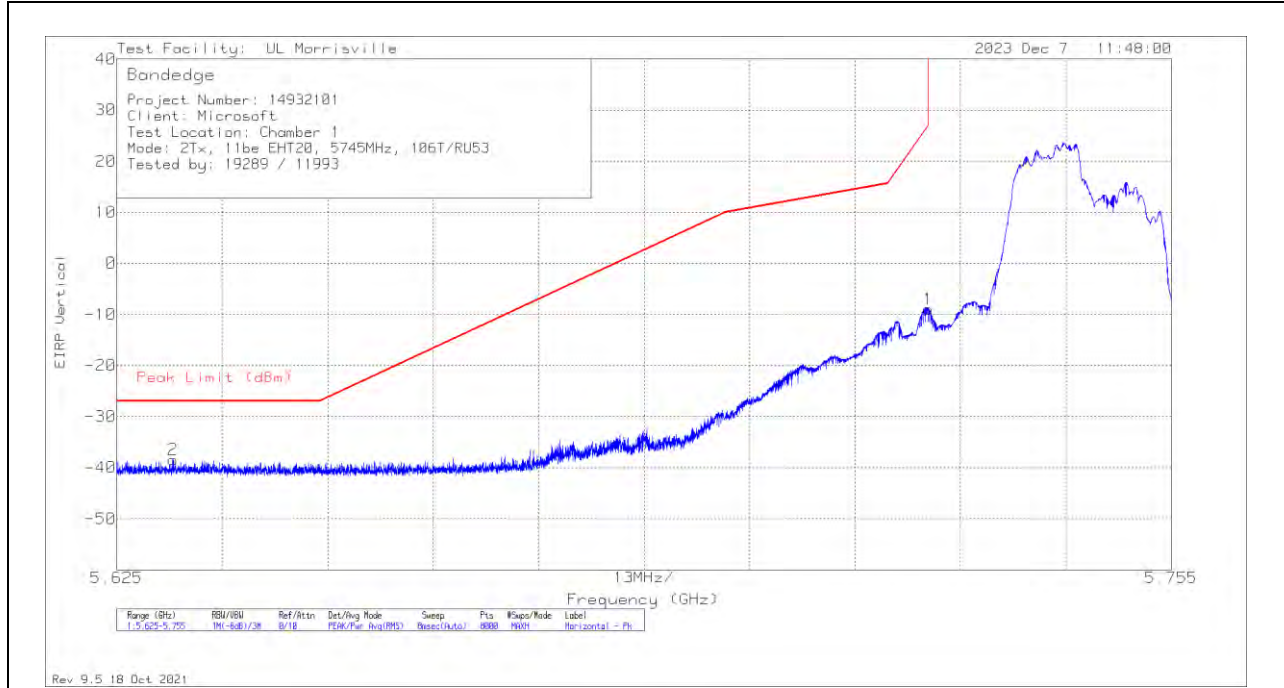

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63192	-71.7	Pk	34.4	-22.9	11.8	10	-38.4	-27	-11.4	38	389	H
1	5.725	-42.24	Pk	34.5	-23	11.8	10	-8.94	27	-35.94	38	389	H

Pk - Peak detector

VERTICAL RESULT

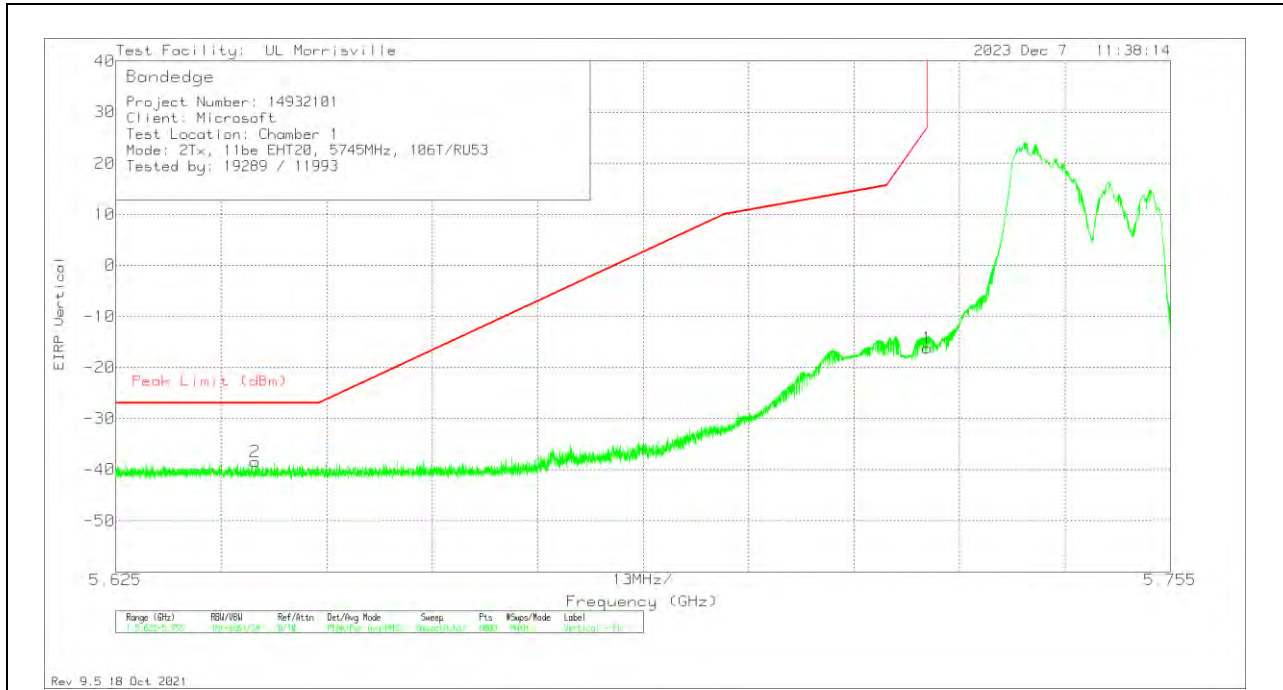


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64218	-71.74	Pk	34.4	-22.9	11.8	10	-38.44	-27	-11.44	11	387	V
1	5.725	-49.57	Pk	34.5	-23	11.8	10	-16.27	27	-43.27	11	387	V

Pk - Peak detector

2TX CDD MODE – 106T+26T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

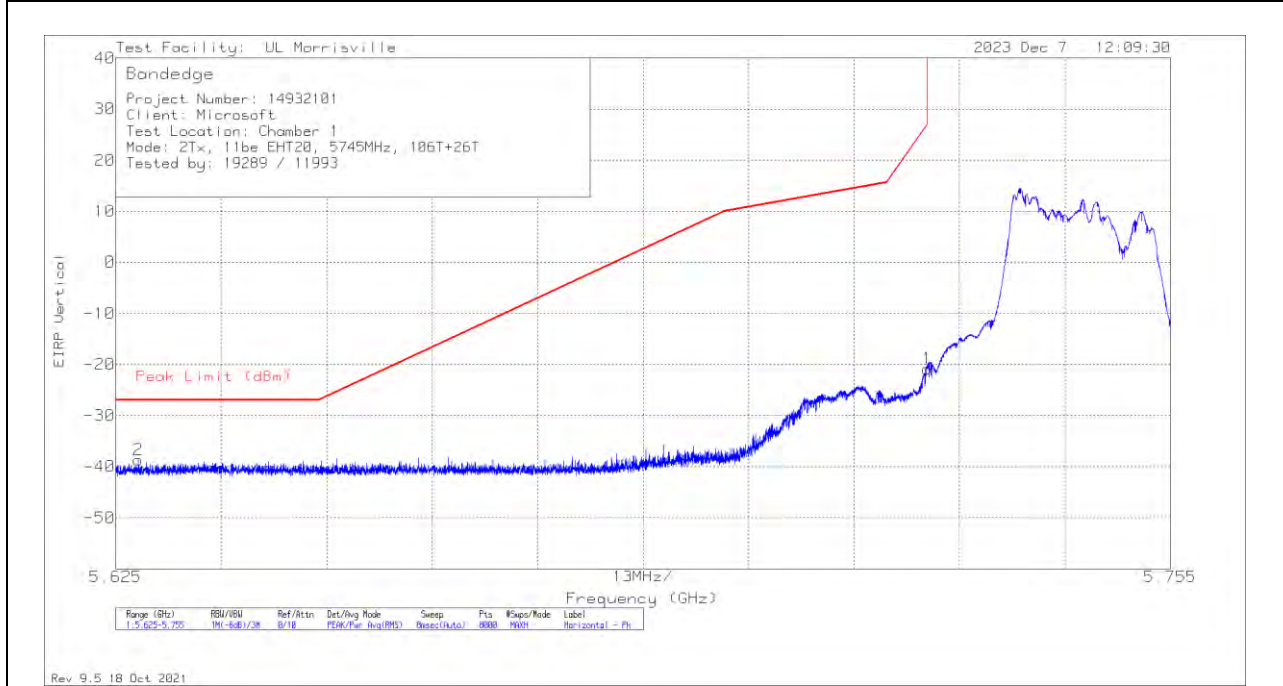

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6278	-71.98	Pk	34.4	-22.9	11.8	10	-38.68	-27	-11.68	277	240	H
1	5.725	-54.12	Pk	34.5	-23	11.8	10	-20.82	27	-47.82	277	240	H

Pk - Peak detector

VERTICAL RESULT

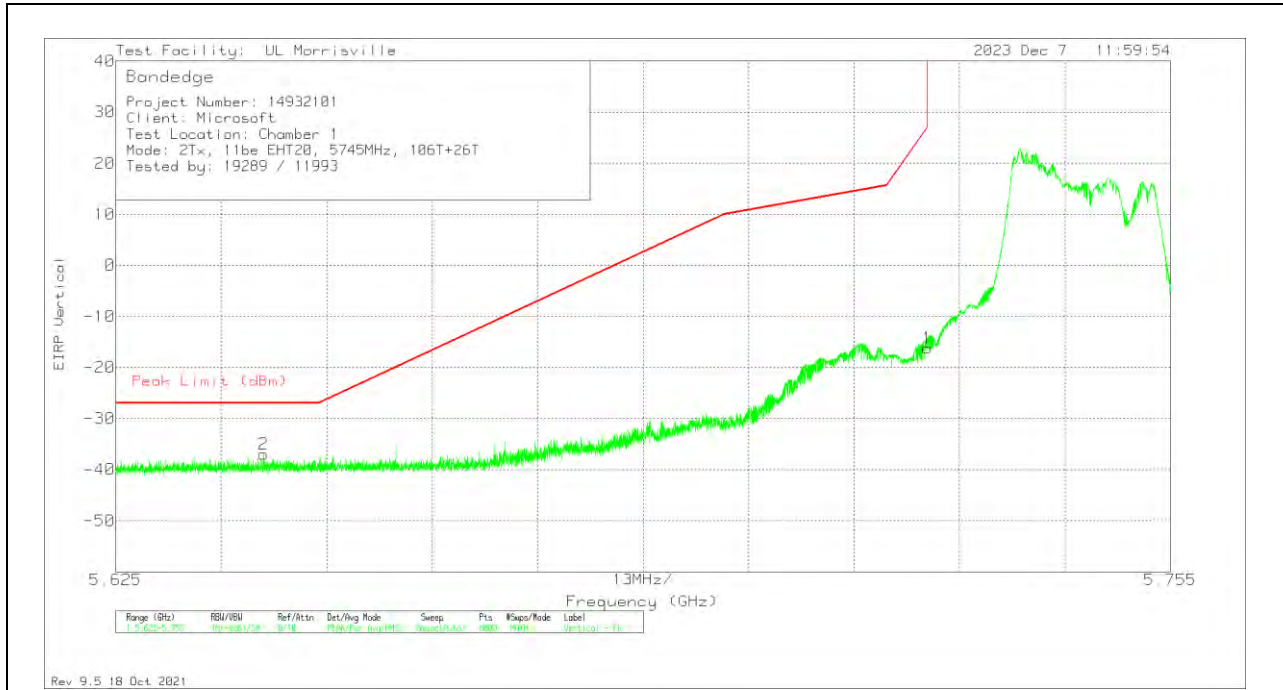

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64319	-70.29	Pk	34.4	-22.9	11.8	10	-36.99	-27	-9.99	7	238	V
1	5.725	-49.54	Pk	34.5	-23	11.8	10	-16.24	27	-43.24	7	238	V

Pk - Peak detector