




2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) LOW POWER INDOOR

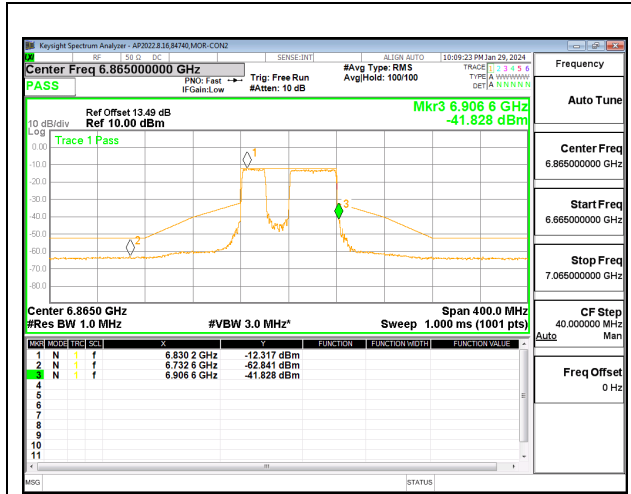


LOW CHANNEL CHAIN 0

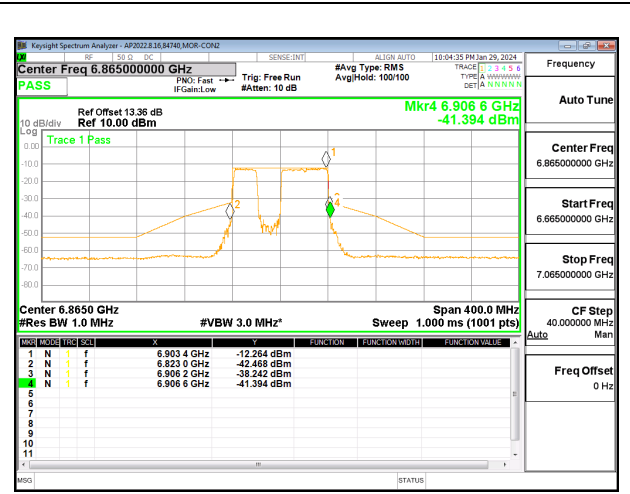


LOW CHANNEL CHAIN 1

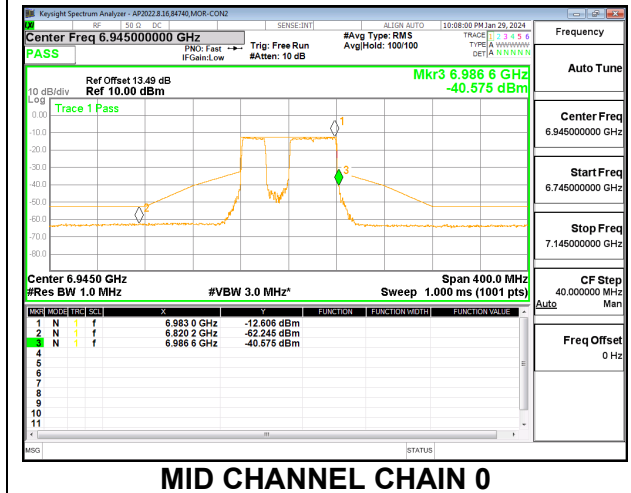


MID CHANNEL CHAIN 0

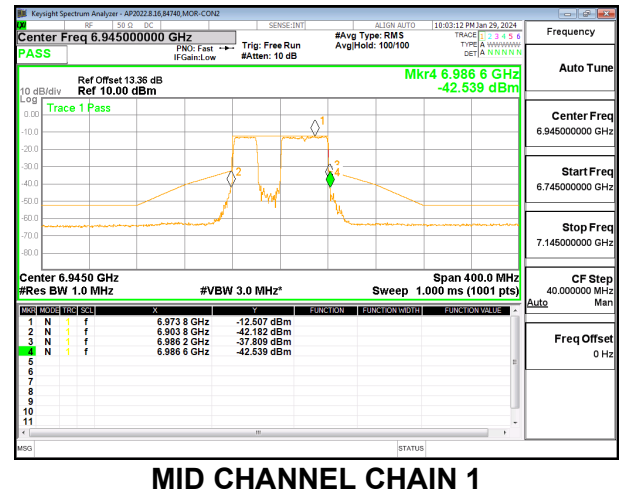

MID CHANNEL CHAIN 1

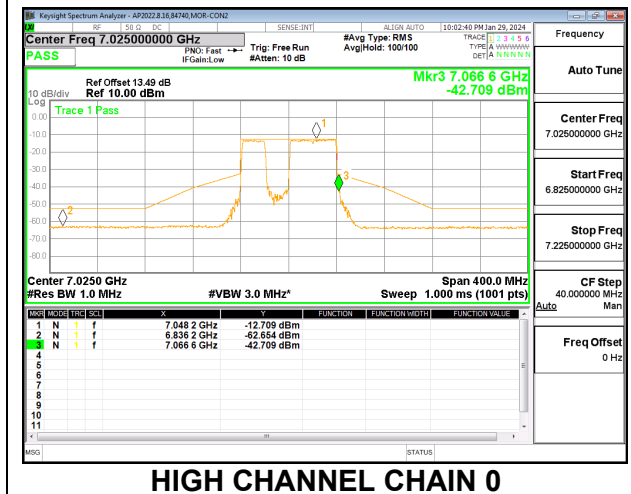


HIGH CHANNEL CHAIN 0

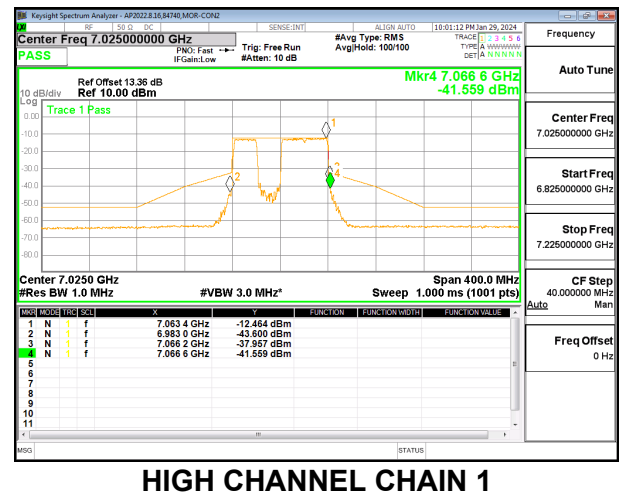


HIGH CHANNEL CHAIN 1


2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T LOW POWER INDOOR

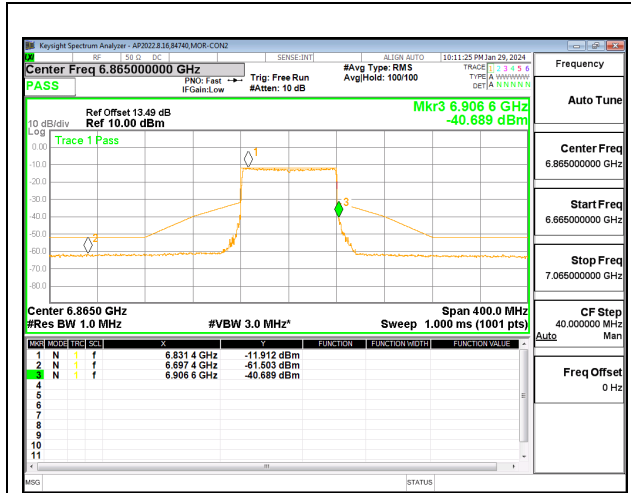


LOW CHANNEL CHAIN 0

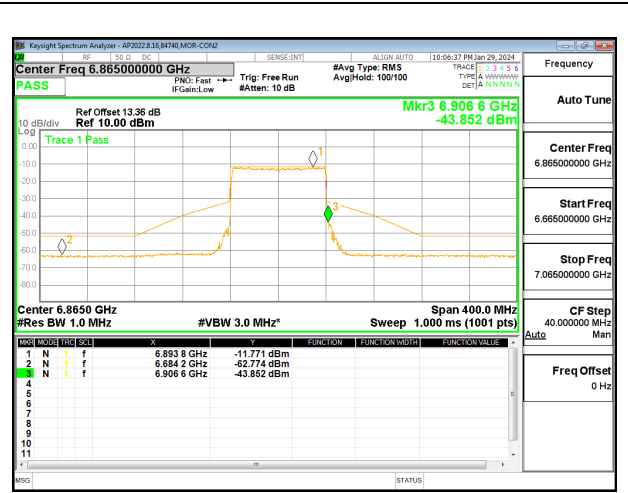


LOW CHANNEL CHAIN 1

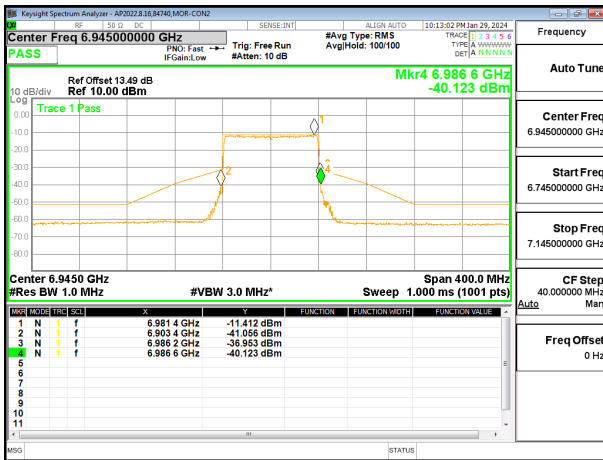


MID CHANNEL CHAIN 0

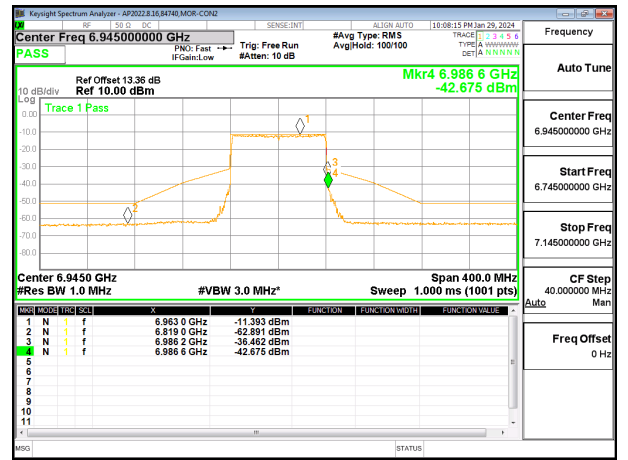

MID CHANNEL CHAIN 1

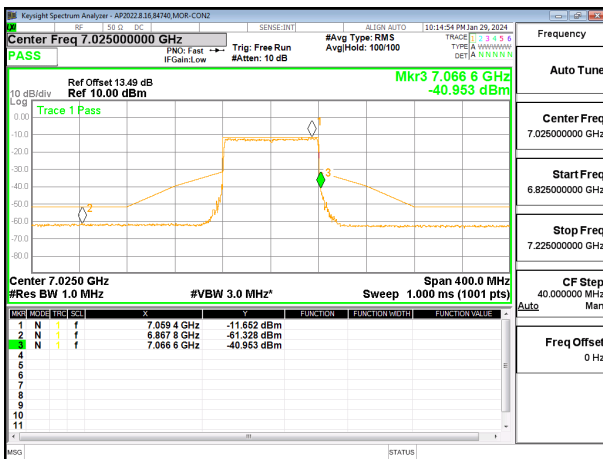


HIGH CHANNEL CHAIN 0

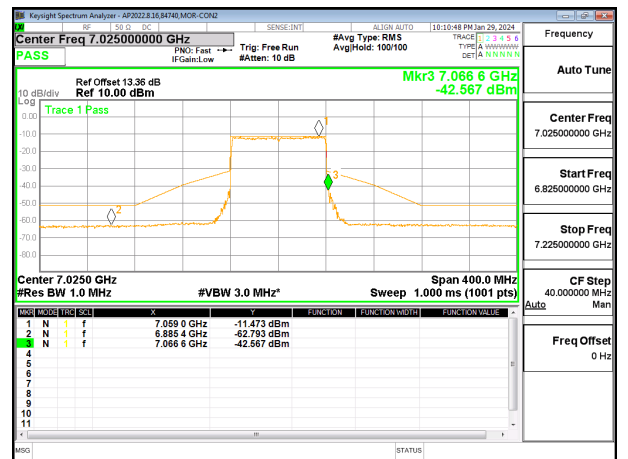


HIGH CHANNEL CHAIN 1


2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: SU LOW POWER INDOOR

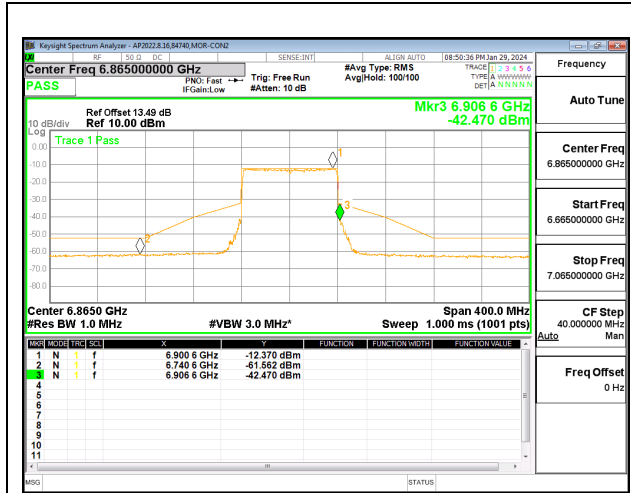


LOW CHANNEL CHAIN 0

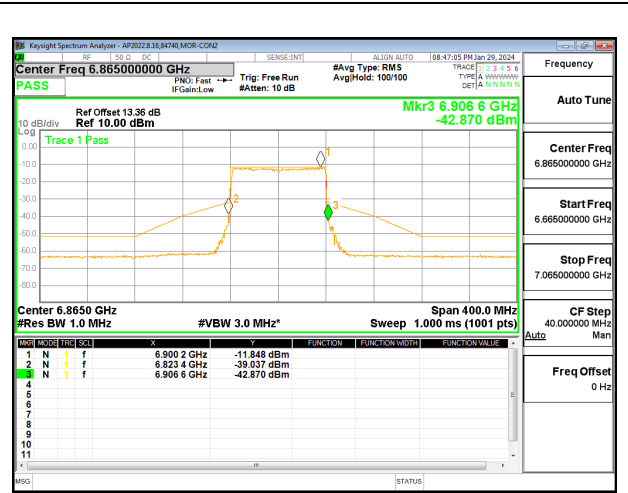


LOW CHANNEL CHAIN 1

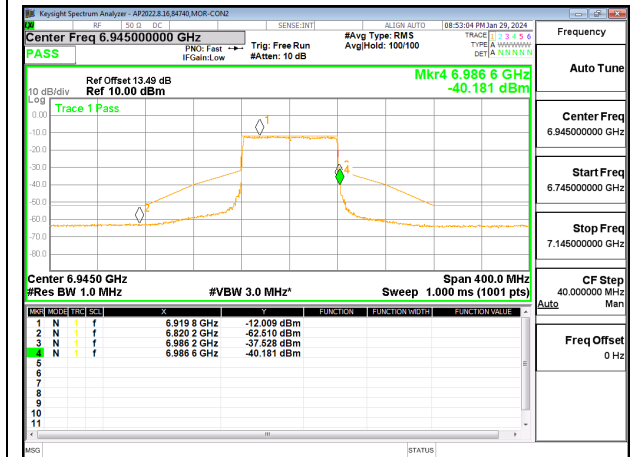


MID CHANNEL CHAIN 0

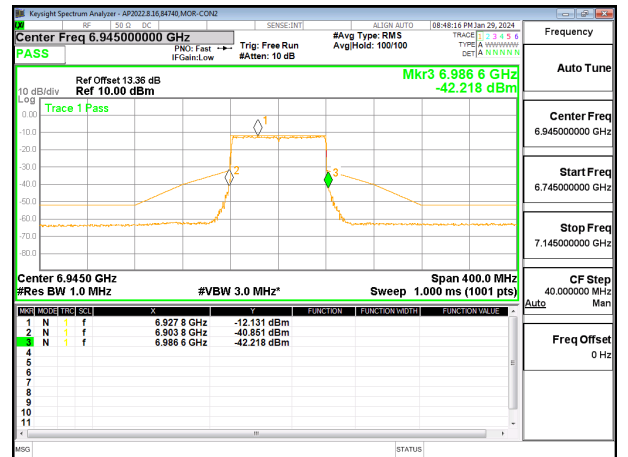

MID CHANNEL CHAIN 1

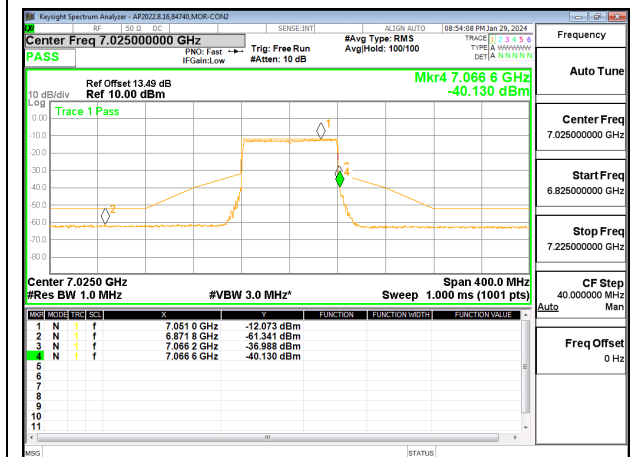


HIGH CHANNEL CHAIN 0

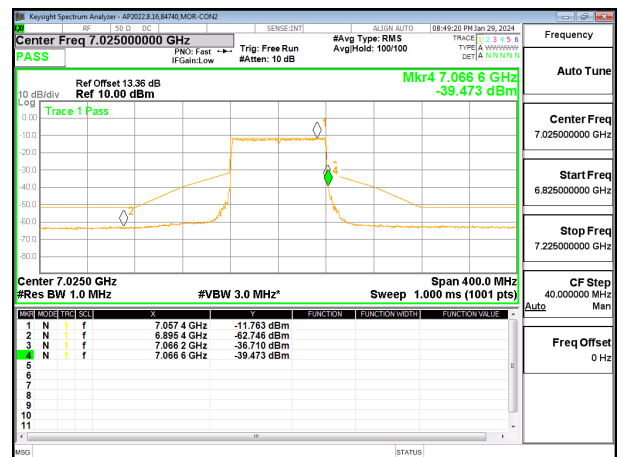

HIGH CHANNEL CHAIN 1


9.5.22. 802.11be EHT160 MODE 2TX IN THE UNII-8 BAND

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) LOW POWER INDOOR

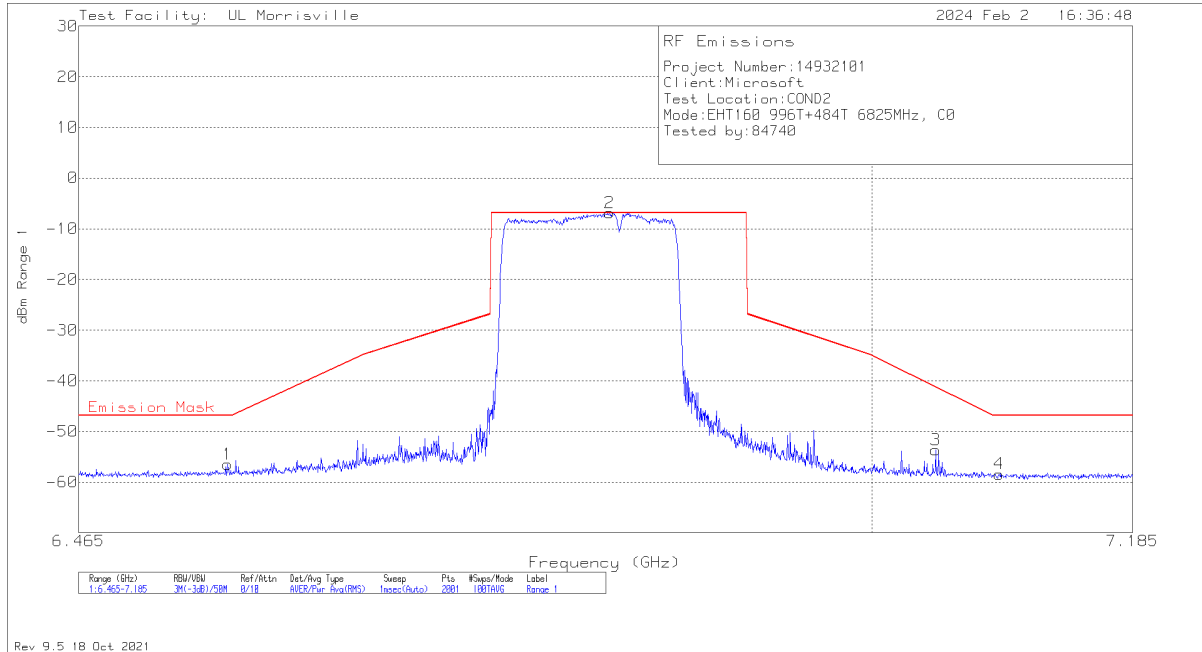


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.5622	-70.01	RMS	9.9	3.6	-56.51	-46.86	-9.65
2	6.81816	-20.38	RMS	9.9	3.6	-6.88	-6.86	-.02
3	7.0446	-67.16	RMS	9.9	3.6	-53.66	-41.31	-12.35
4	7.0896	-71.88	RMS	9.9	3.6	-58.38	-46.86	-11.52

RMS - RMS detection

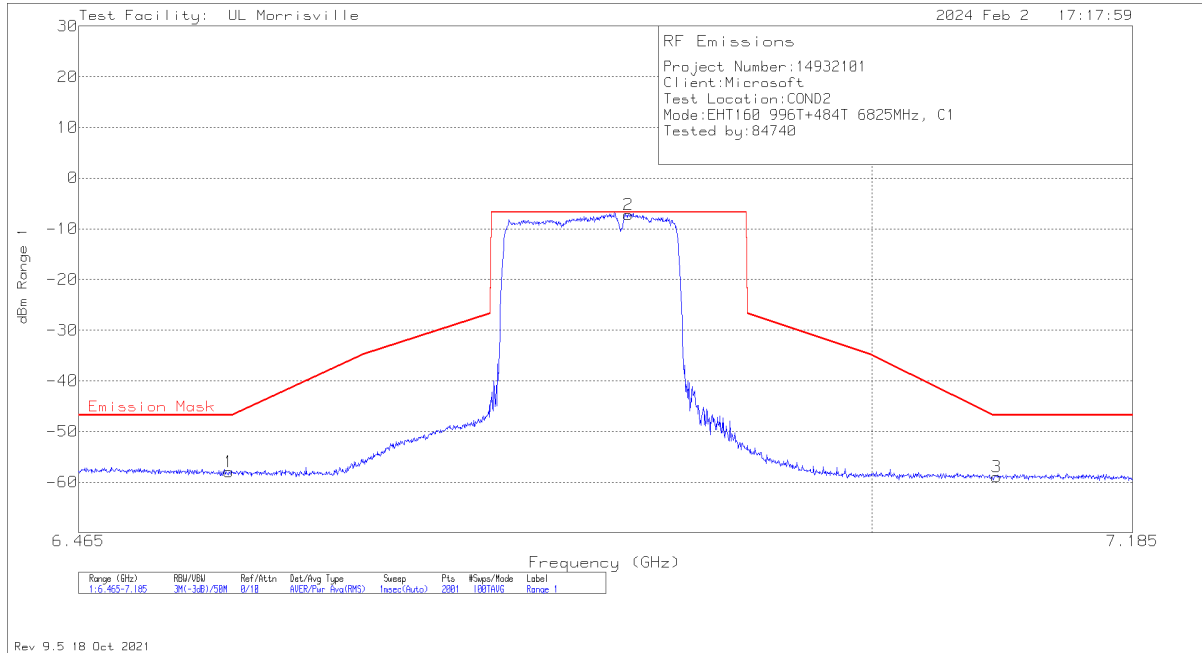


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.56292	-71.27	RMS	9.8	3.5	-57.97	-46.75	-11.22
2	6.83112	-20.55	RMS	9.8	3.5	-7.25	-6.75	-.5
3	7.08798	-72.24	RMS	9.8	3.5	-58.94	-46.75	-12.19

RMS - RMS detection

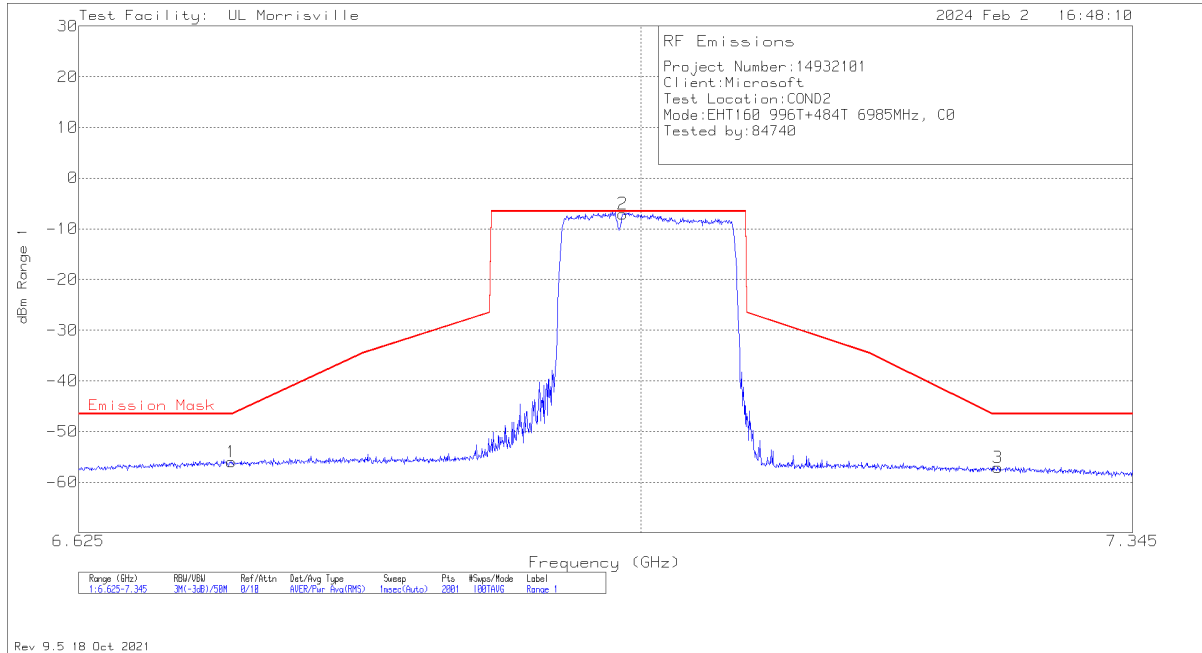

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.72472	-69.44	RMS	9.9	3.6	-55.94	-46.53	-9.41
2	6.98752	-20.53	RMS	9.9	3.6	-7.03	-6.53	-.5
3	7.24888	-70.54	RMS	9.9	3.6	-57.04	-46.53	-10.51


RMS - RMS detection

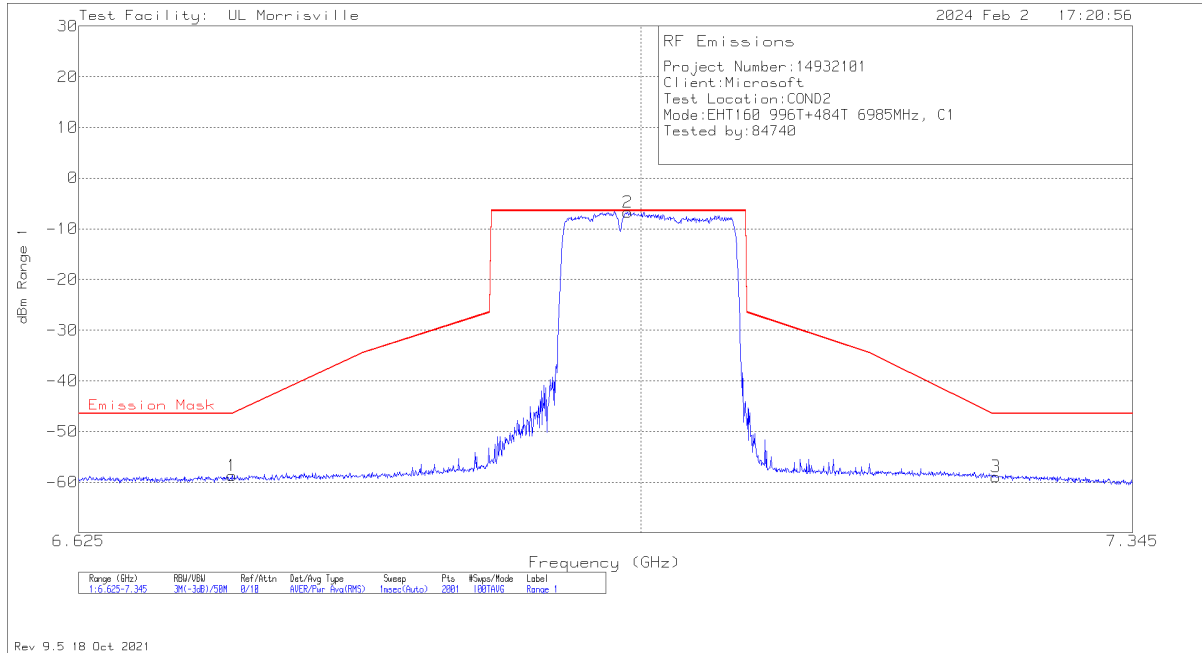

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.72508	-72.02	RMS	9.8	3.5	-58.72	-46.47	-12.25
2	6.99076	-19.97	RMS	9.8	3.5	-6.67	-6.48	-1.19
3	7.24744	-72.18	RMS	9.8	3.5	-58.88	-46.48	-12.4


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) LOW POWER INDOOR

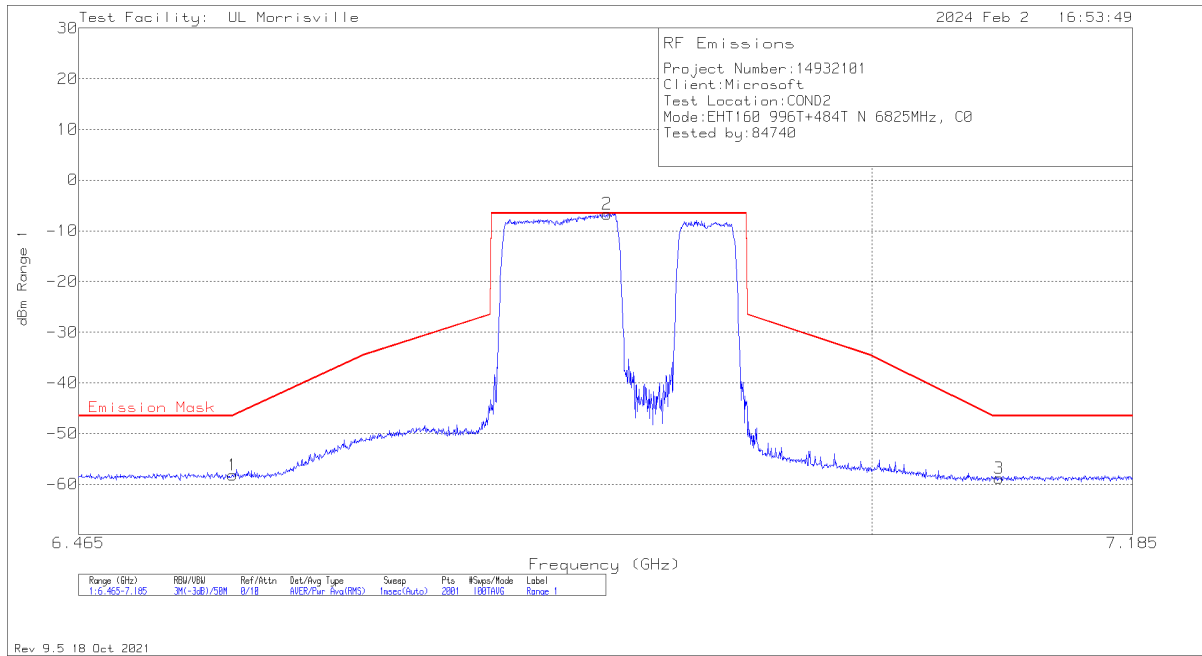


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.56544	-71.72	RMS	9.9	3.6	-58.22	-46.49	-11.73
2	6.81636	-20.16	RMS	9.9	3.6	-6.66	-6.55	-.11
3	7.0896	-72.32	RMS	9.9	3.6	-58.82	-46.55	-12.27

RMS - RMS detection

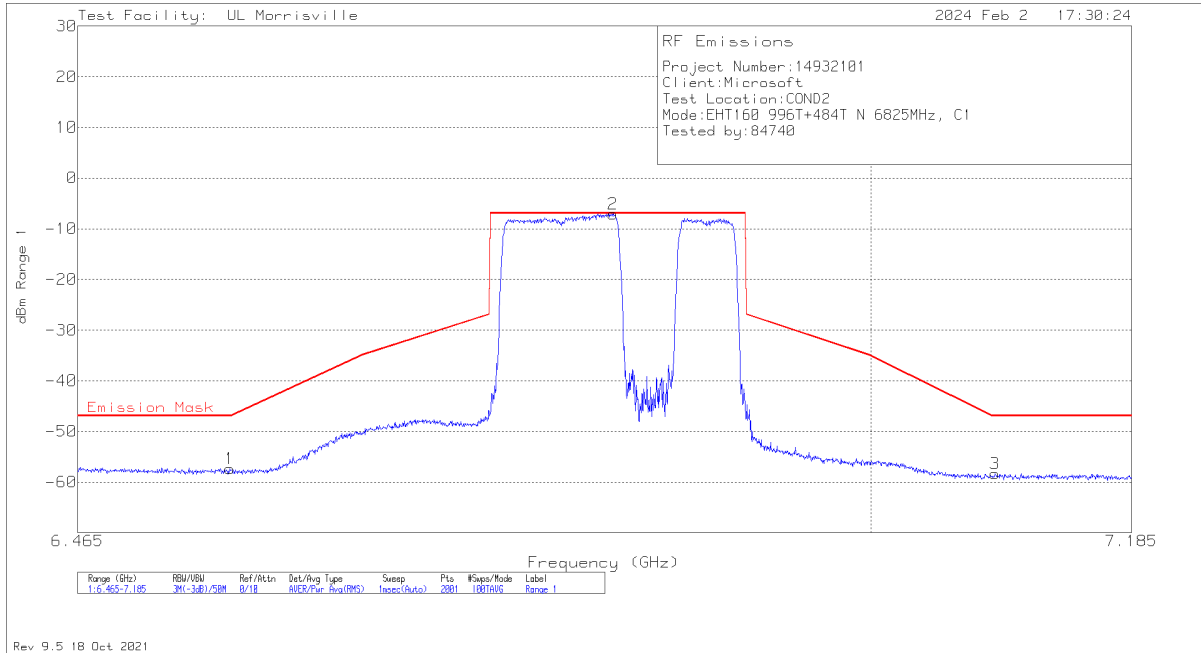


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.56436	-70.62	RMS	9.8	3.5	-57.32	-46.93	-10.39
2	6.8214	-20.41	RMS	9.8	3.5	-7.11	-6.93	-.18
3	7.08744	-71.58	RMS	9.8	3.5	-58.28	-46.93	-11.35

RMS - RMS detection

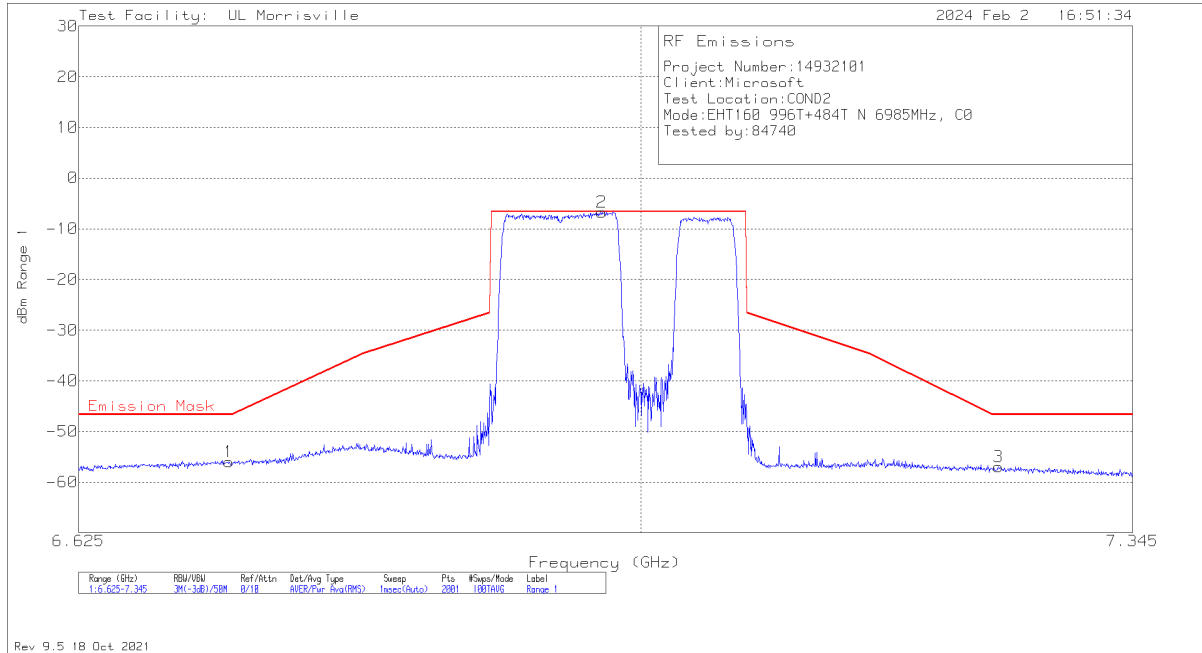

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.72328	-69.42	RMS	9.9	3.6	-55.92	-46.65	-9.27
2	6.97312	-20.23	RMS	9.9	3.6	-6.73	-6.65	-0.08
3	7.24924	-70.44	RMS	9.9	3.6	-56.94	-46.65	-10.29


RMS - RMS detection

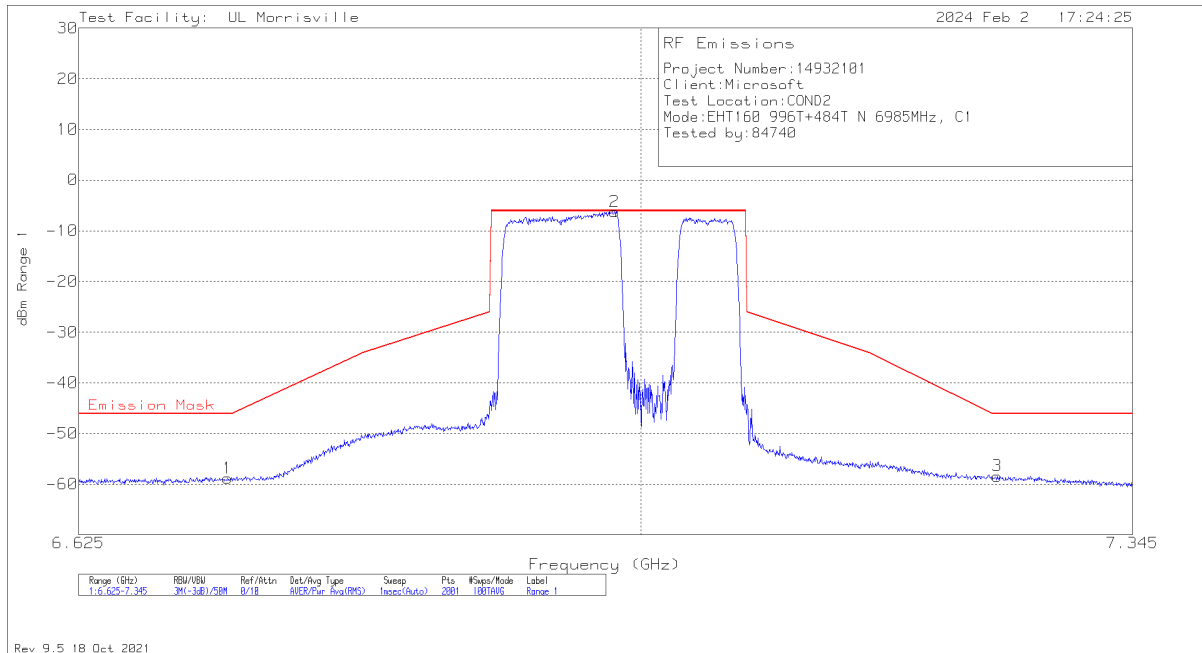

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.7222	-72.1	RMS	9.8	3.5	-58.8	-46.08	-12.72
2	6.98176	-19.52	RMS	9.8	3.5	-6.22	-6.08	-1.14
3	7.24852	-71.68	RMS	9.8	3.5	-58.38	-46.08	-12.3


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) LOW POWER INDOOR

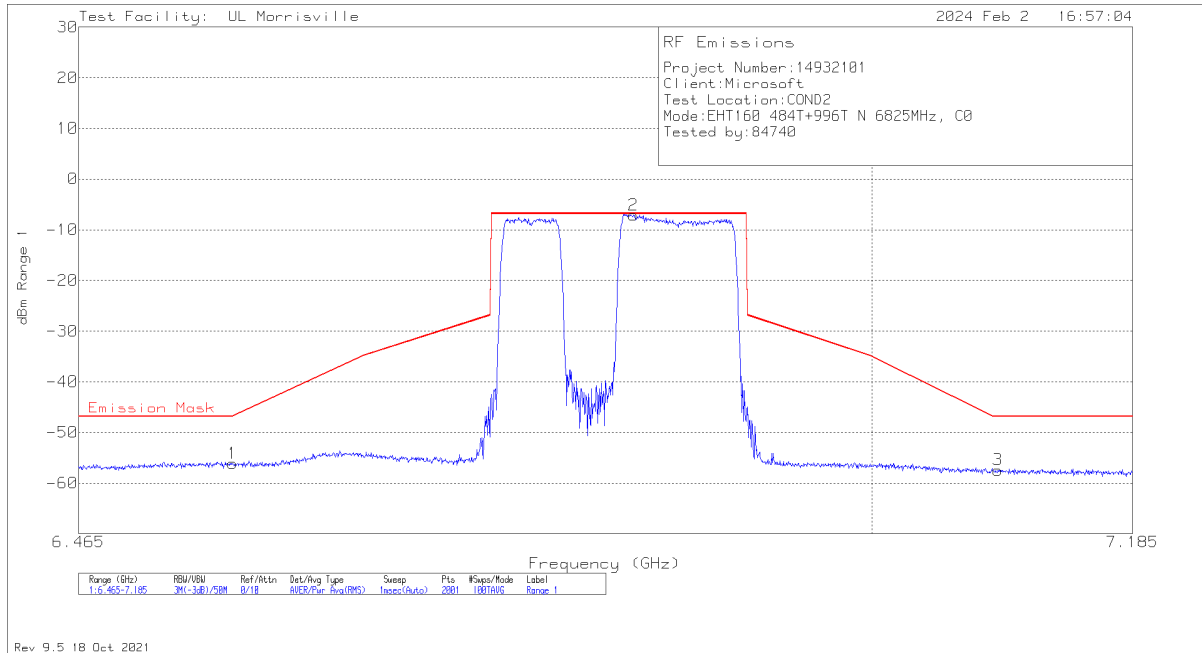


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.56544	-69.63	RMS	9.9	3.6	-56.13	-46.78	-9.35
2	6.83472	-20.61	RMS	9.9	3.6	-7.11	-6.84	-.27
3	7.08888	-70.89	RMS	9.9	3.6	-57.39	-46.84	-10.55

RMS - RMS detection

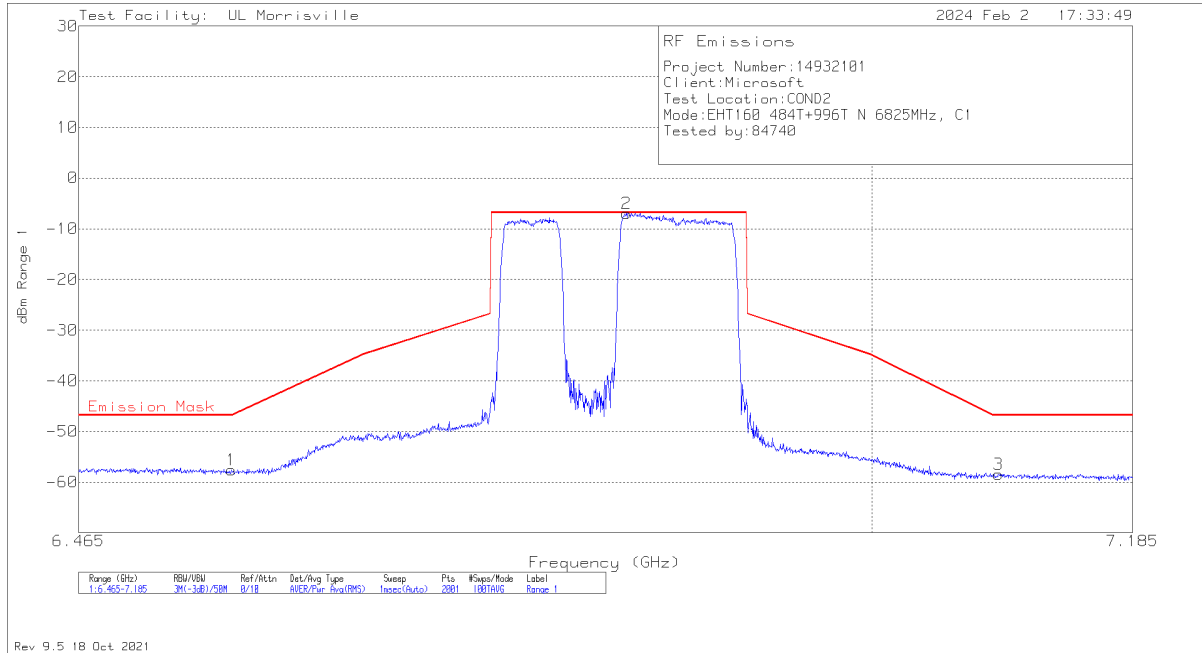


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.56472	-70.86	RMS	9.8	3.5	-57.56	-46.8	-10.76
2	6.82968	-20.25	RMS	9.8	3.5	-6.95	-6.8	-.15
3	7.08924	-71.79	RMS	9.8	3.5	-58.49	-46.8	-11.69

RMS - RMS detection

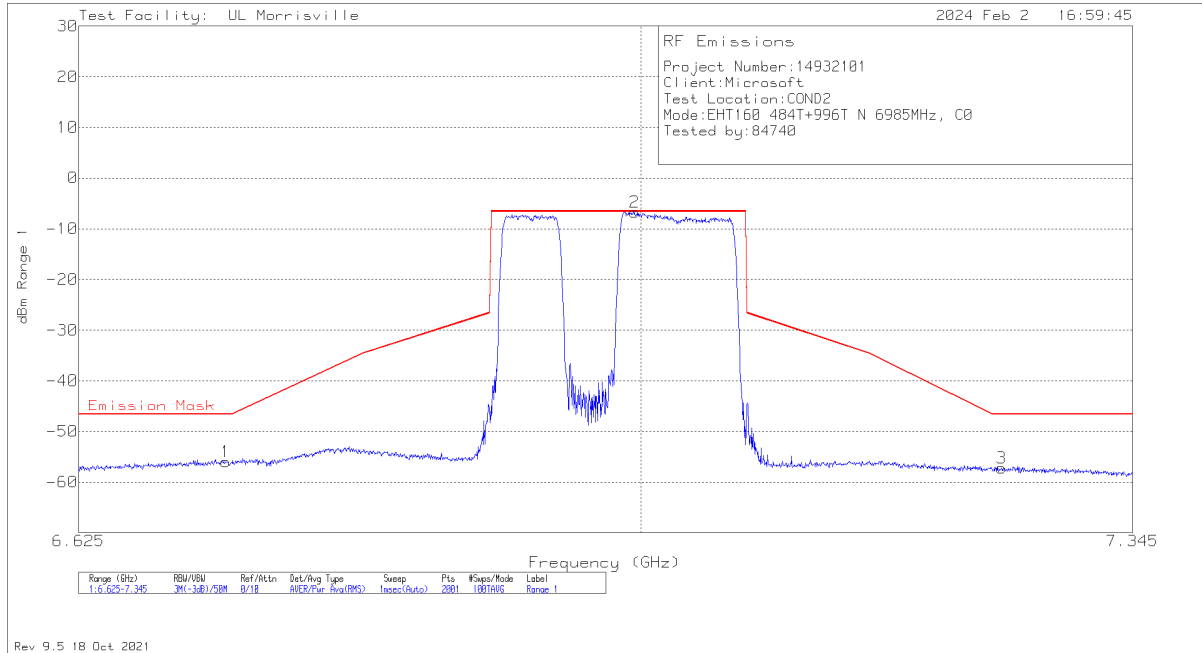

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.72112	-69.44	RMS	9.9	3.6	-55.94	-46.58	-9.36
2	6.99544	-20.23	RMS	9.9	3.6	-6.73	-6.58	-.15
3	7.2514	-70.68	RMS	9.9	3.6	-57.18	-46.58	-10.6


RMS - RMS detection

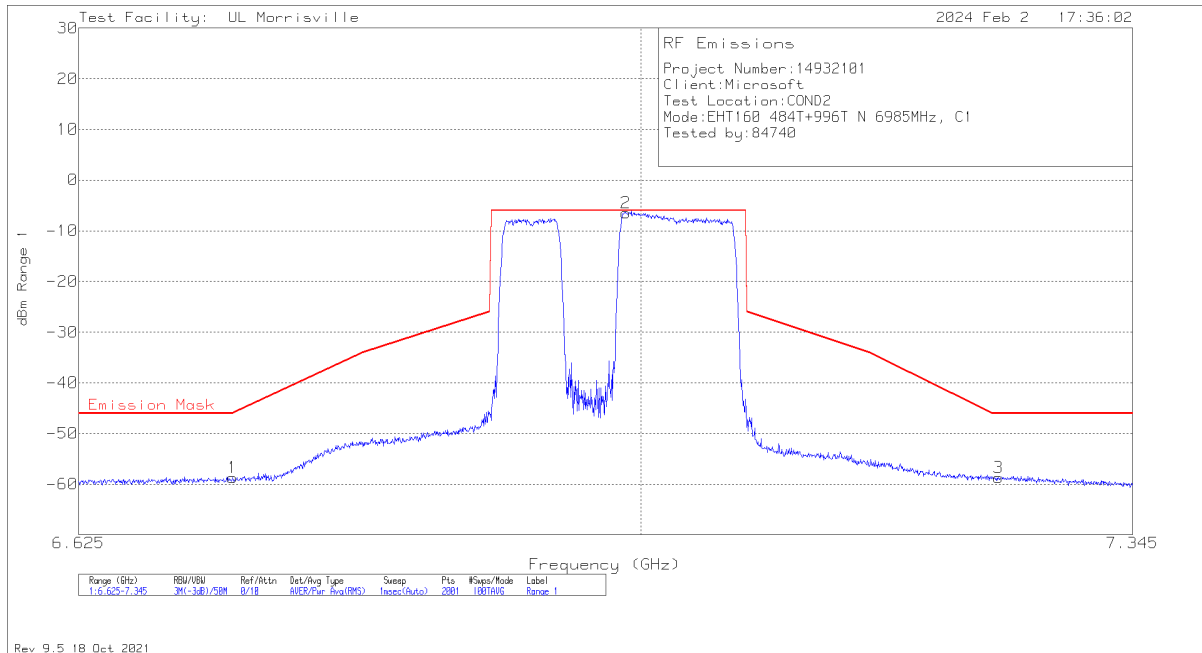

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.7258	-71.97	RMS	9.8	3.5	-58.67	-45.92	-12.75
2	6.98968	-19.73	RMS	9.8	3.5	-6.43	-6.03	-.4
3	7.24924	-72.02	RMS	9.8	3.5	-58.72	-46.03	-12.69


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T LOW POWER INDOOR

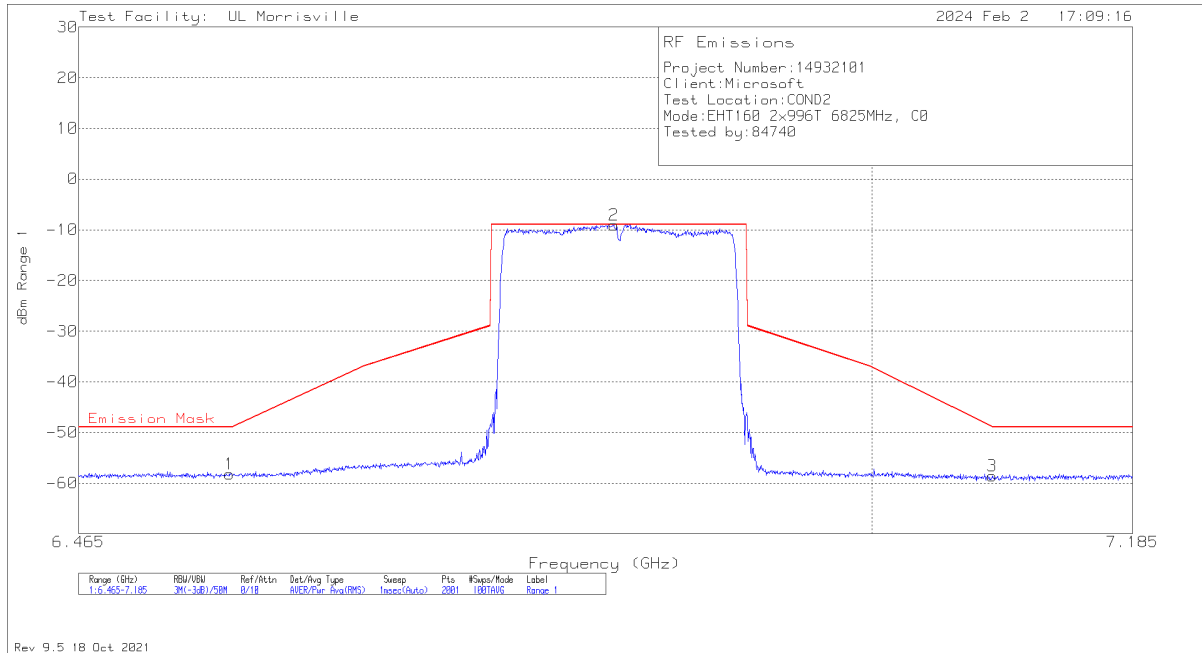


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.56328	-71.64	RMS	9.9	3.6	-58.14	-48.96	-9.18
2	6.82104	-22.58	RMS	9.9	3.6	-9.08	-8.96	-1.12
3	7.08492	-72.1	RMS	9.9	3.6	-58.6	-48.95	-9.65

RMS - RMS detection

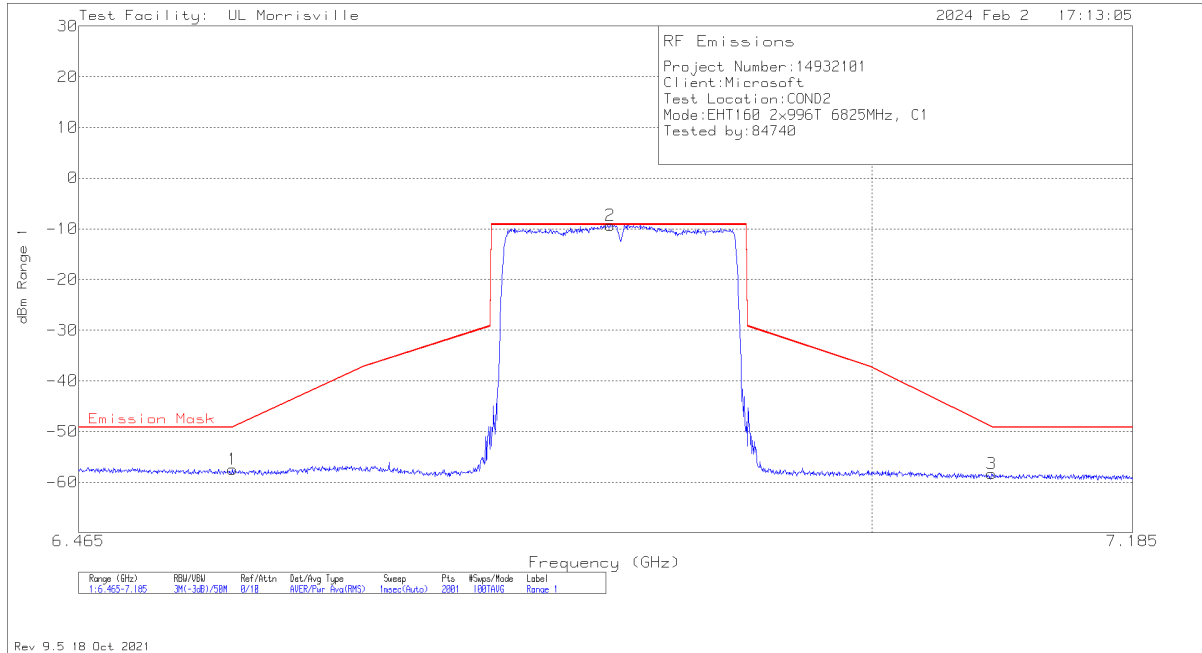


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.56544	-70.75	RMS	9.8	3.5	-57.45	-49.12	-8.33
2	6.81852	-22.59	RMS	9.8	3.5	-9.29	-9.18	-1.11
3	7.0842	-71.58	RMS	9.8	3.5	-58.28	-49.07	-9.21

RMS - RMS detection

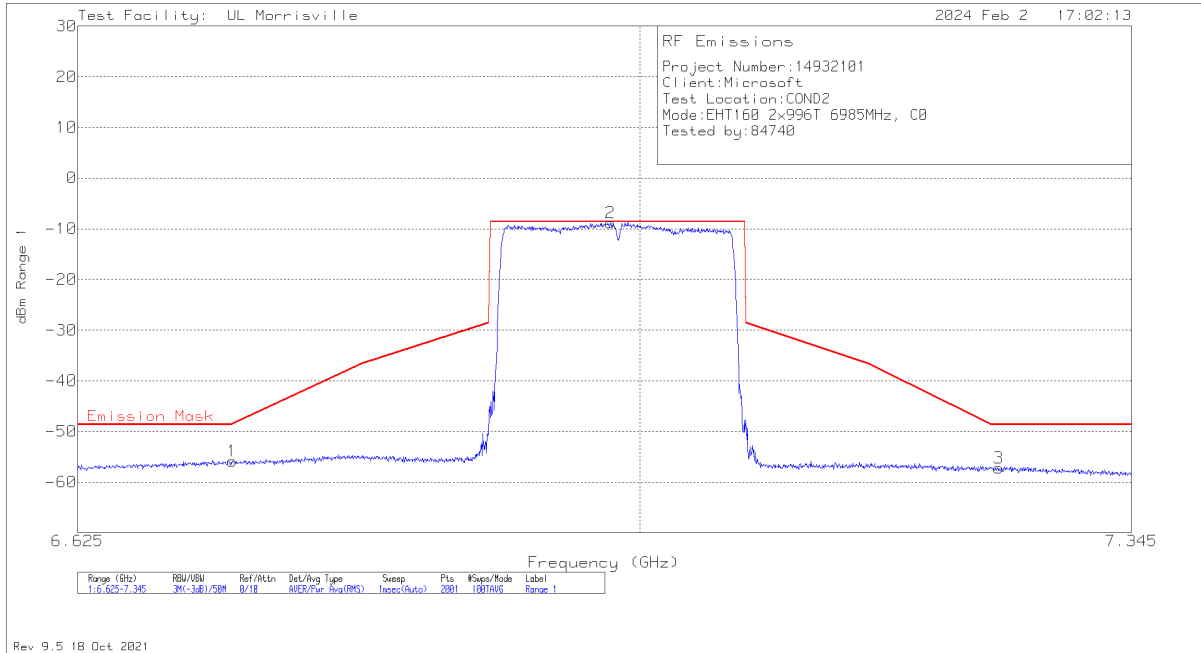

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.72616	-69.3	RMS	9.9	3.6	-55.8	-48.46	-7.34
2	6.9796	-22.35	RMS	9.9	3.6	-8.85	-8.62	-2.23
3	7.24996	-70.65	RMS	9.9	3.6	-57.15	-48.62	-8.53

RMS - RMS detection

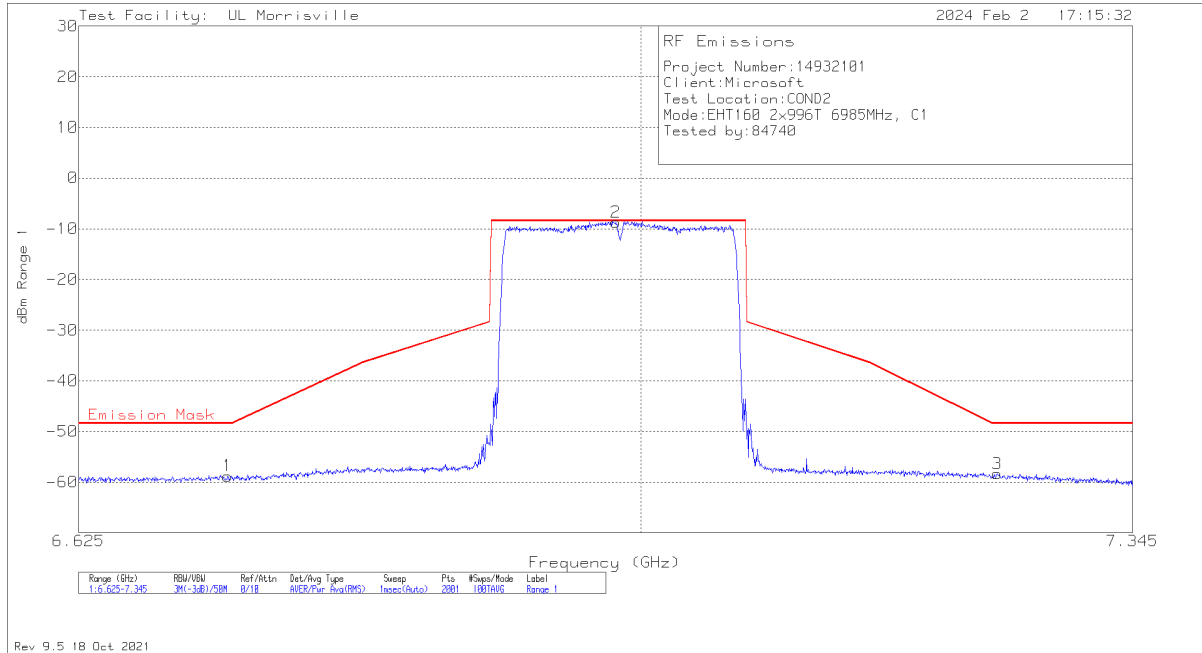


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.7222	-72.05	RMS	9.8	3.5	-58.75	-48.39	-10.36
2	6.98284	-21.95	RMS	9.8	3.5	-8.65	-8.39	-2.6
3	7.24816	-71.57	RMS	9.8	3.5	-58.27	-48.39	-9.88

RMS - RMS detection


9.5.23. 802.11be EHT320 MODE 2TX IN THE UNII-8 BAND

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) LOW POWER INDOOR

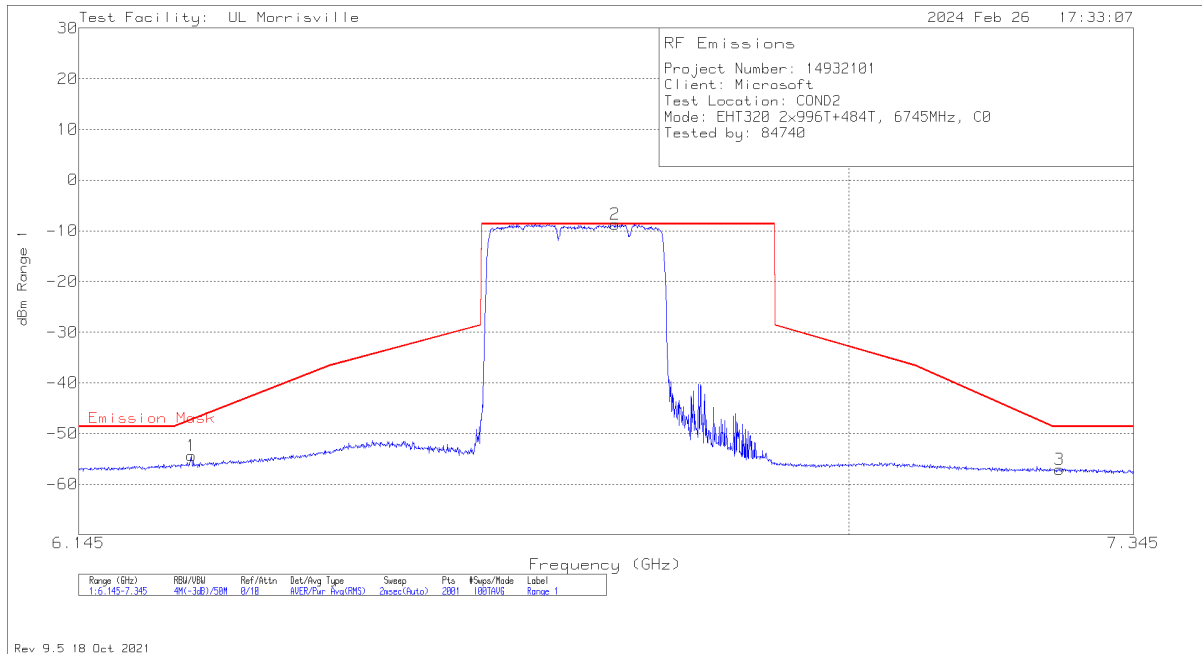


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2632	-67.87	RMS	9.9	3.6	-54.37	-47.31	-7.06
2	6.7282	-22.21	RMS	9.9	3.6	-8.71	-8.64	-.07
3	7.2538	-70.53	RMS	9.9	3.6	-57.03	-48.64	-8.39

RMS - RMS detection

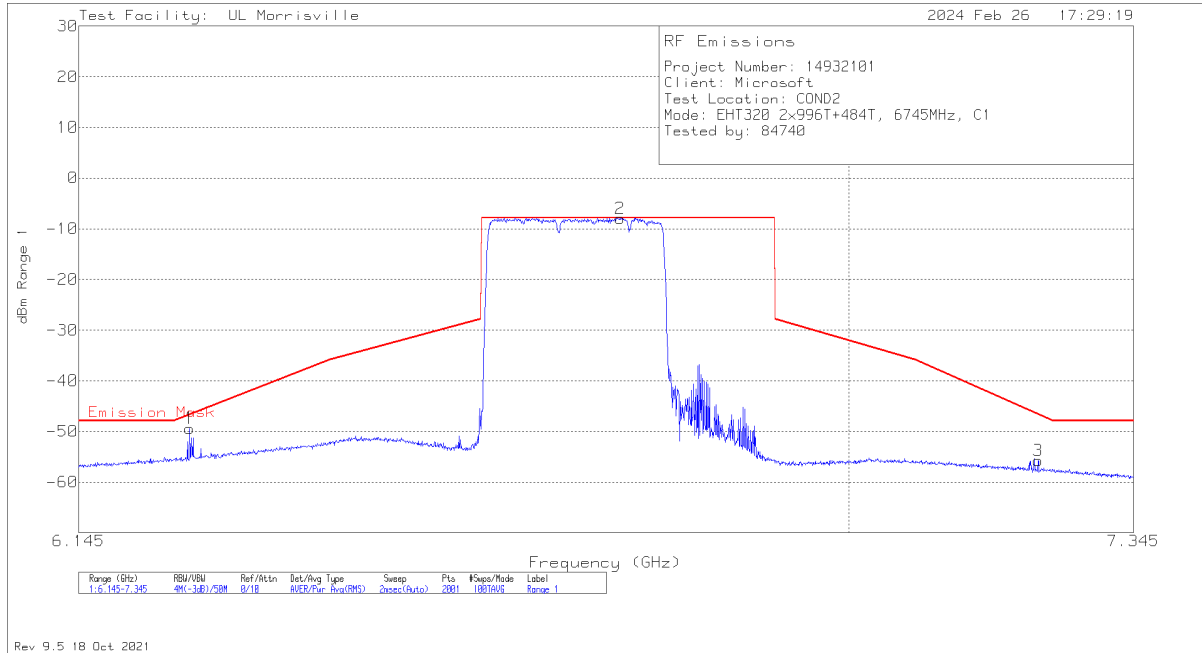


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2614	-62.65	RMS	9.8	3.5	-49.35	-46.68	-2.67
2	6.7342	-21.21	RMS	9.8	3.5	-7.91	-7.88	-.03
3	7.2274	-68.97	RMS	9.8	3.5	-55.67	-46.62	-9.05

RMS - RMS detection

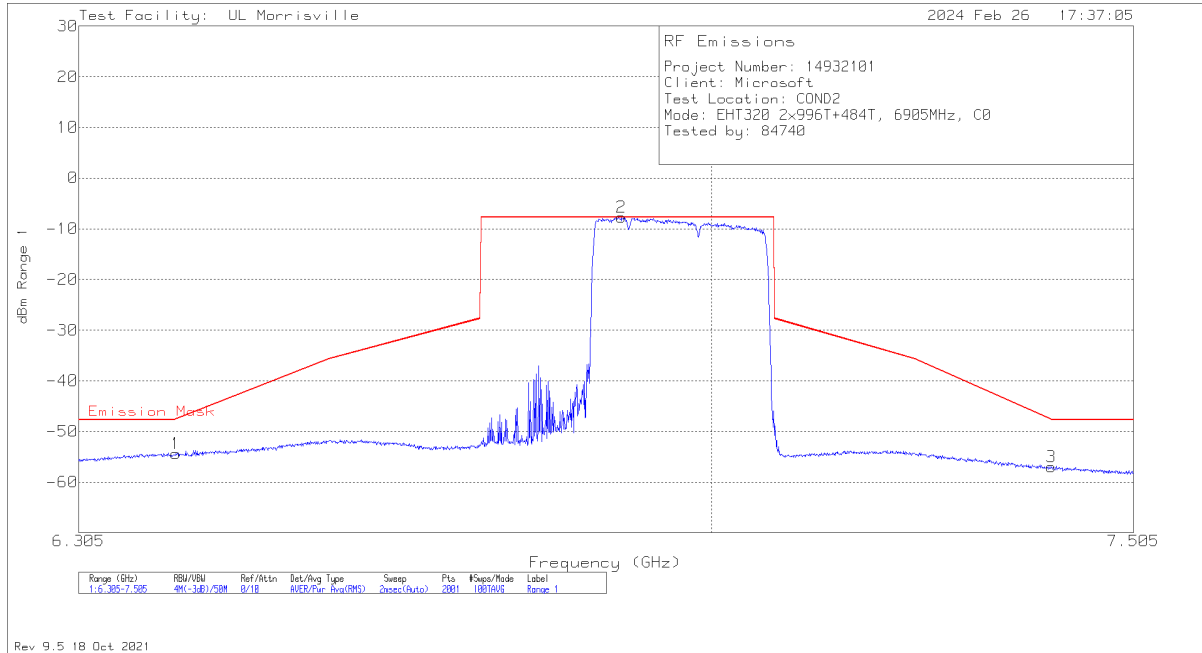

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.407	-67.89	RMS	9.9	3.6	-54.39	-47.57	-6.82
2	6.8966	-21.23	RMS	9.9	3.6	-7.73	-7.72	-.01
3	7.4036	-70.41	RMS	9.9	3.6	-56.91	-47.62	-9.29


RMS - RMS detection

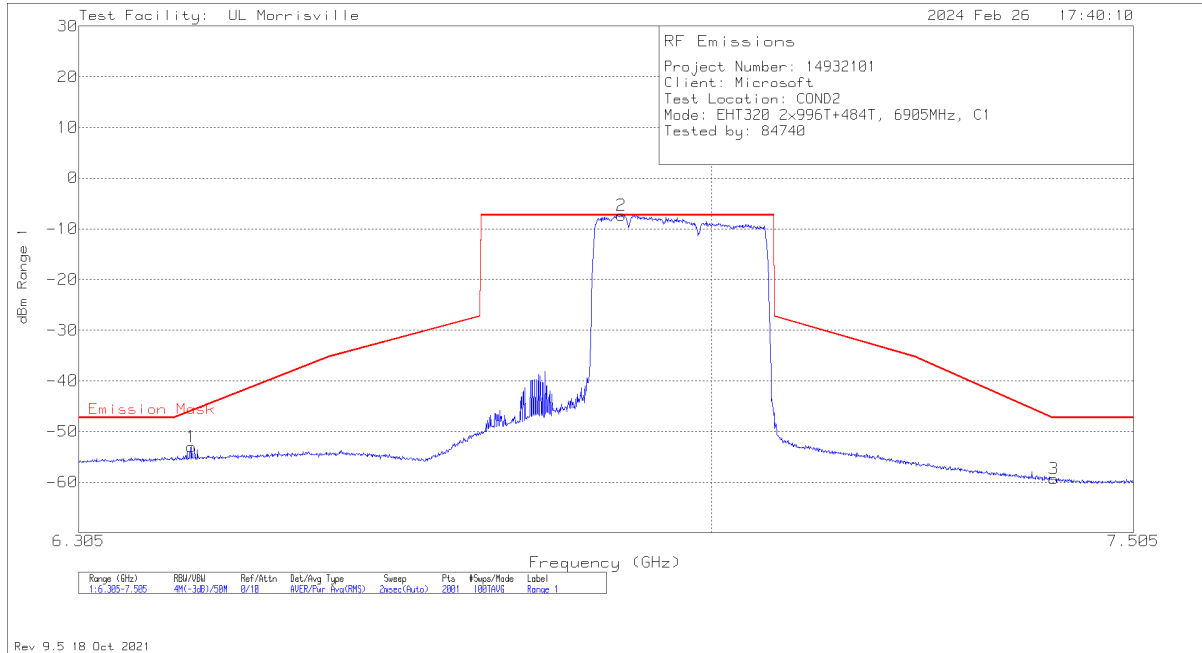

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4238	-66.31	RMS	9.8	3.5	-53.01	-45.92	-7.09
2	6.896	-20.67	RMS	9.8	3.5	-7.37	-7.29	-0.08
3	7.4072	-72.58	RMS	9.8	3.5	-59.28	-47.29	-11.99


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) LOW POWER INDOOR

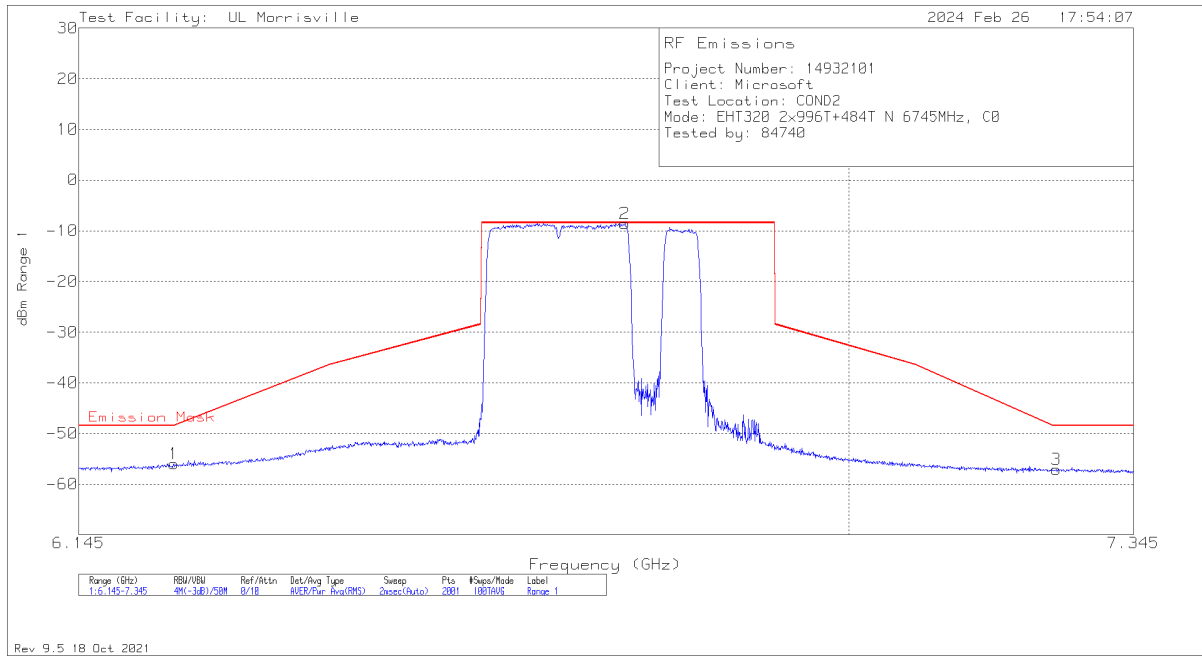


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2446	-69.51	RMS	9.9	3.6	-56.01	-48.45	-7.56
2	6.7396	-22.12	RMS	9.9	3.6	-8.62	-8.45	-.17
3	7.2496	-70.58	RMS	9.9	3.6	-57.08	-48.45	-8.63

RMS - RMS detection

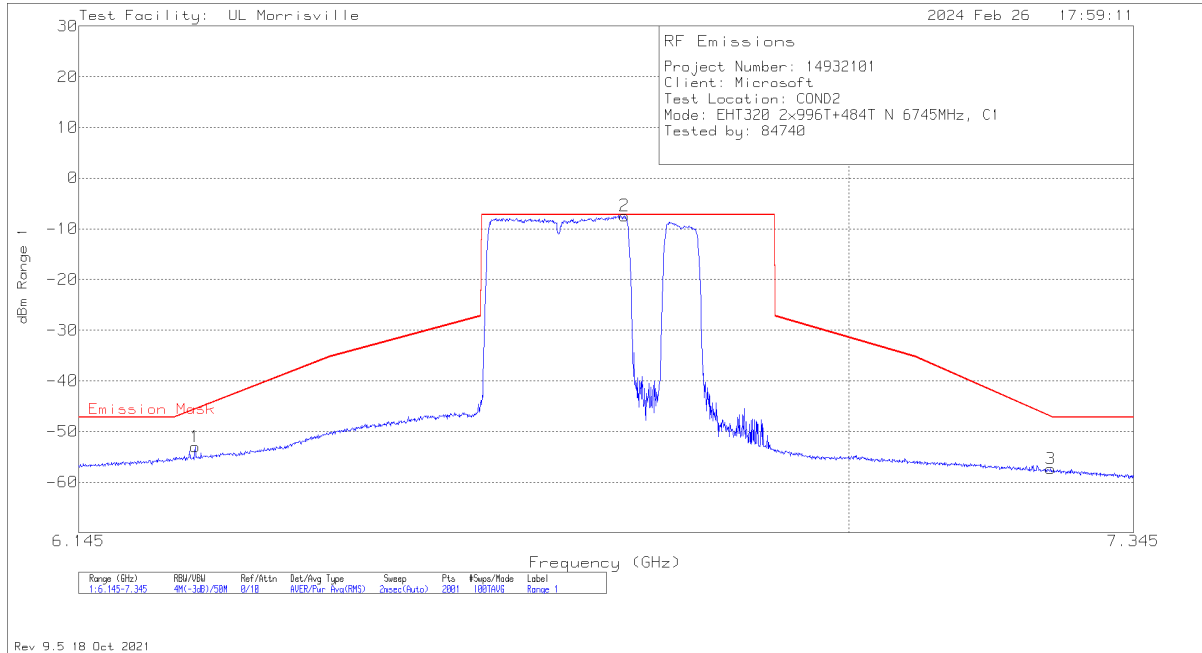


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2674	-66.35	RMS	9.8	3.5	-53.05	-45.6	-7.45
2	6.739	-20.7	RMS	9.8	3.5	-7.4	-7.24	-1.16
3	7.243	-70.65	RMS	9.8	3.5	-57.35	-47.1	-10.25

RMS - RMS detection

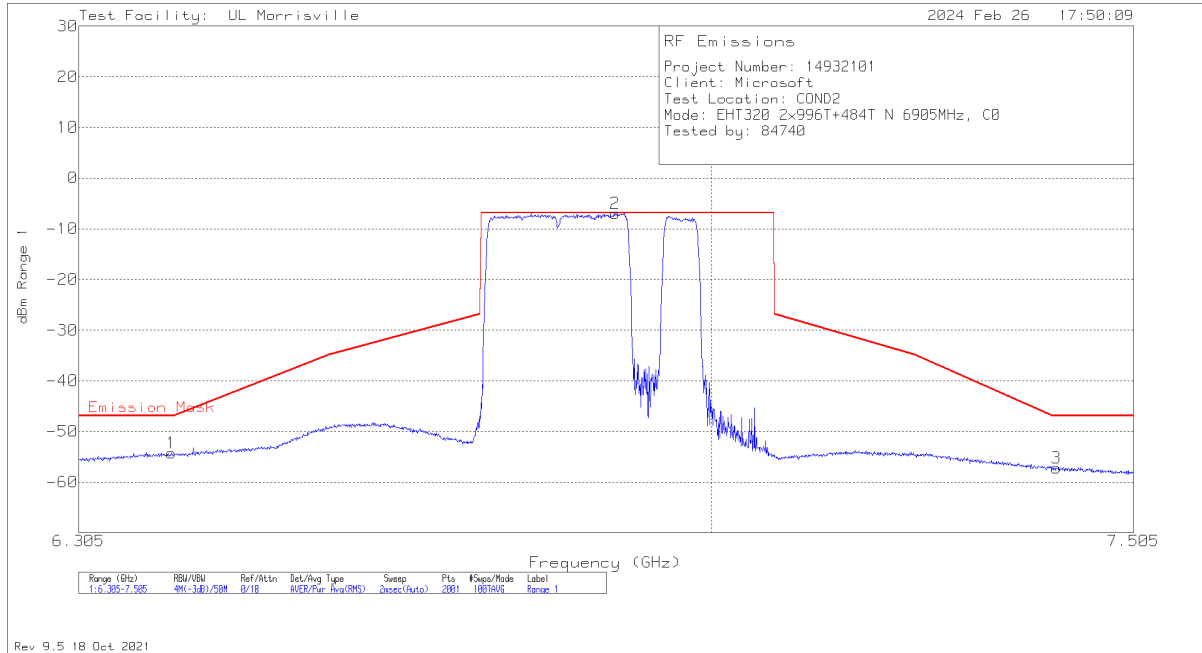

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4022	-67.69	RMS	9.9	3.6	-54.19	-46.87	-7.32
2	6.8894	-20.52	RMS	9.9	3.6	-7.02	-6.87	-1.15
3	7.4102	-70.67	RMS	9.9	3.6	-57.17	-46.87	-10.3


RMS - RMS detection

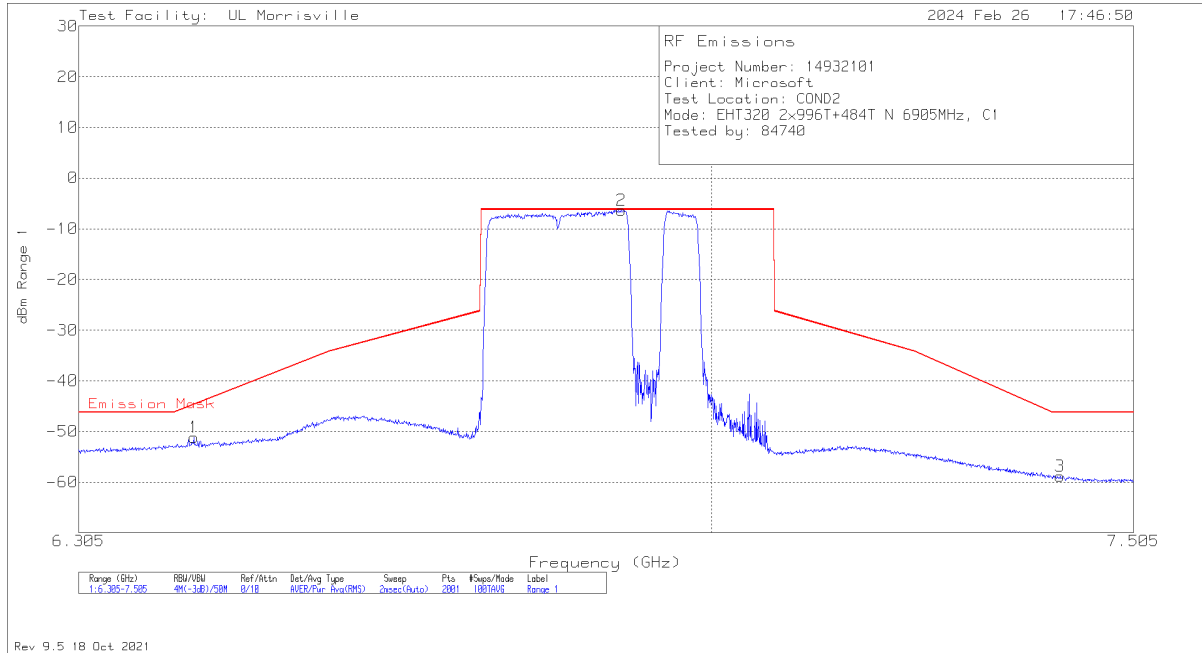

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4262	-64.42	RMS	9.8	3.5	-51.12	-44.67	-6.45
2	6.8966	-19.69	RMS	9.8	3.5	-6.39	-6.22	-1.17
3	7.4144	-72.12	RMS	9.8	3.5	-58.82	-46.22	-12.6


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) LOW POWER INDOOR

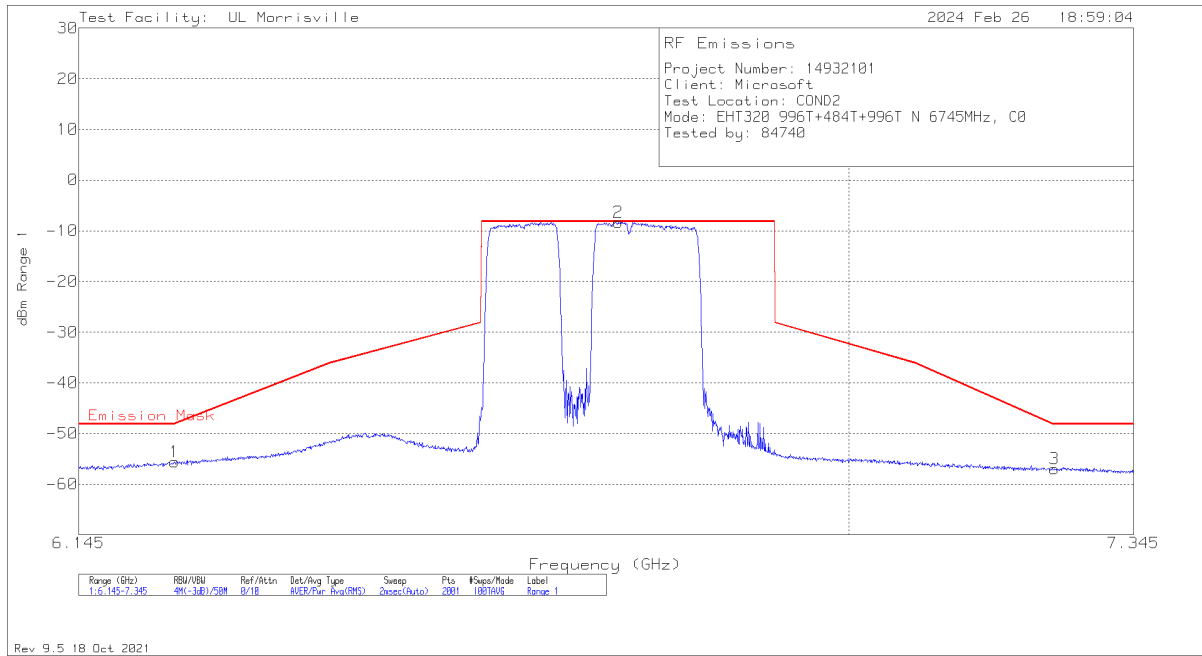


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2452	-69.12	RMS	9.9	3.6	-55.62	-48.13	-7.49
2	6.7318	-21.79	RMS	9.9	3.6	-8.29	-8.14	-.15
3	7.2478	-70.49	RMS	9.9	3.6	-56.99	-48.14	-8.85

RMS - RMS detection

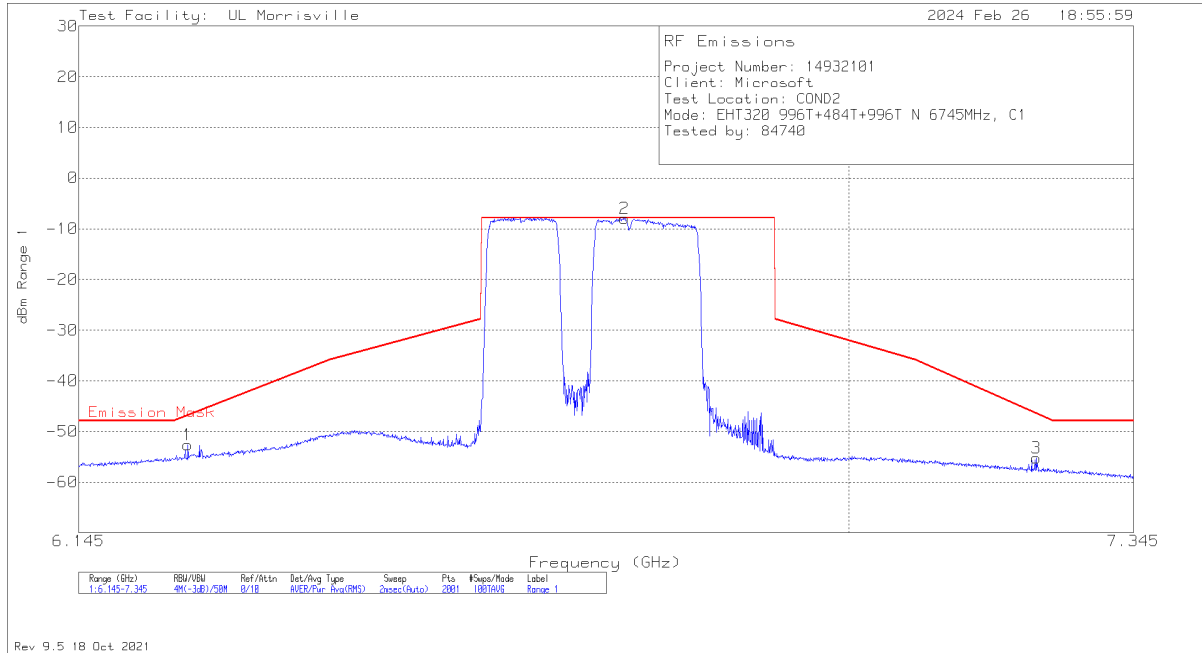


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2596	-65.94	RMS	9.8	3.5	-52.64	-46.8	-5.84
2	6.739	-21.2	RMS	9.8	3.5	-7.9	-7.87	-.03
3	7.225	-68.56	RMS	9.8	3.5	-55.26	-46.44	-8.82

RMS - RMS detection

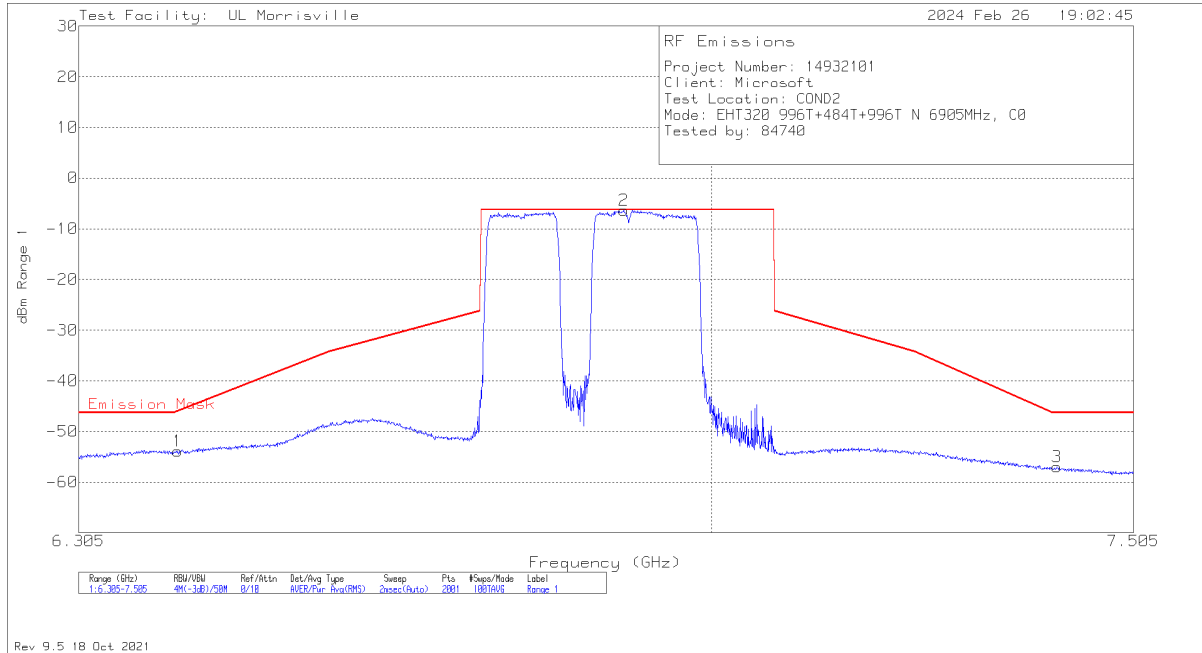

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4088	-67.31	RMS	9.9	3.6	-53.81	-46	-7.81
2	6.899	-19.88	RMS	9.9	3.6	-6.38	-6.28	-.1
3	7.4108	-70.5	RMS	9.9	3.6	-57	-46.28	-10.72


RMS - RMS detection

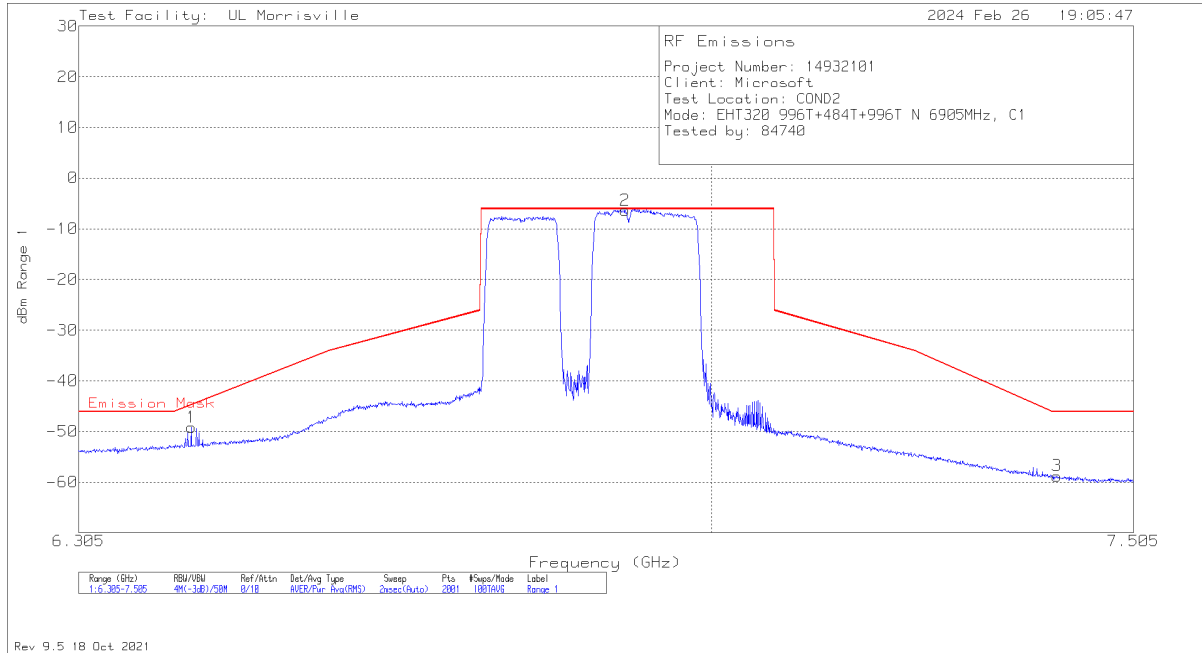

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4232	-62.48	RMS	9.8	3.5	-49.18	-44.78	-4.4
2	6.9008	-19.6	RMS	9.8	3.5	-6.3	-6.11	-1.19
3	7.4108	-72.05	RMS	9.8	3.5	-58.75	-46.11	-12.64


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) LOW POWER INDOOR

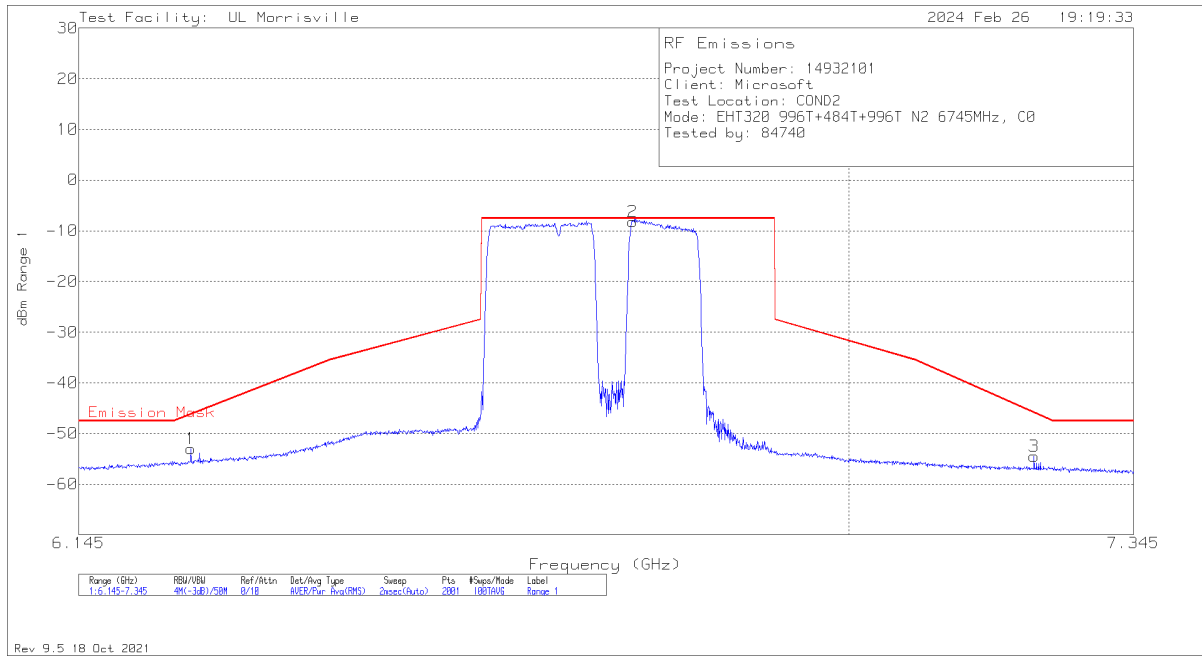


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2626	-66.45	RMS	9.9	3.6	-52.95	-46.23	-6.72
2	6.7486	-21.72	RMS	9.9	3.6	-8.22	-7.52	-.7
3	7.2226	-67.94	RMS	9.9	3.6	-54.44	-45.92	-8.52

RMS - RMS detection

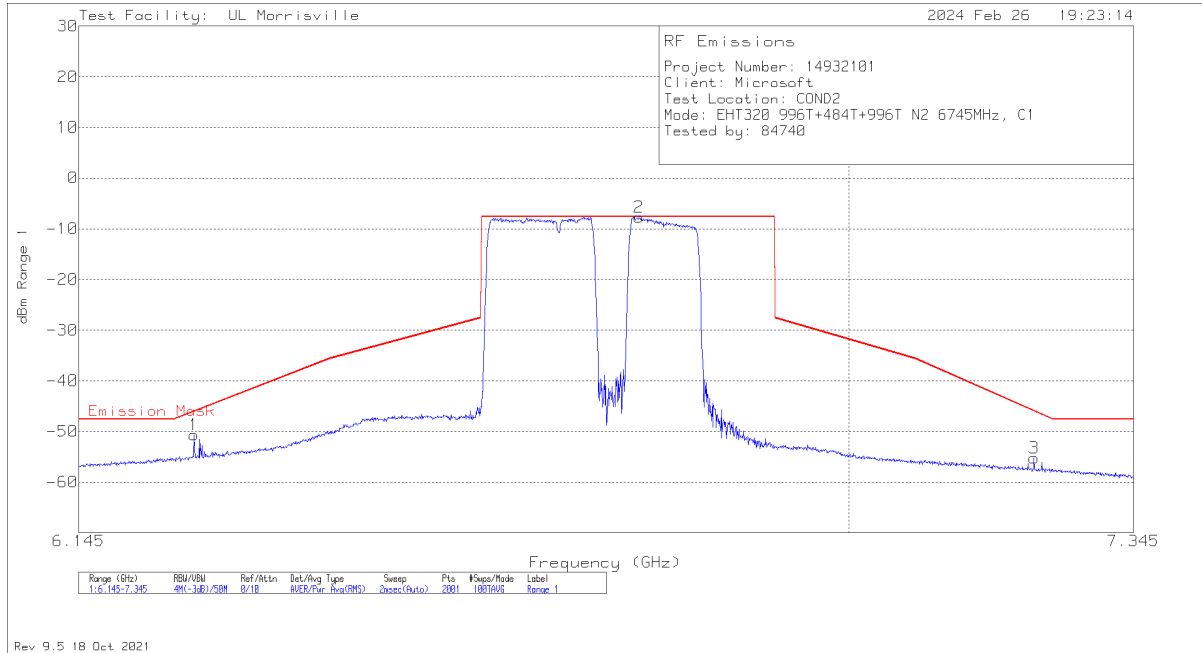


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2662	-63.96	RMS	9.8	3.5	-50.66	-46.06	-4.6
2	6.7558	-20.98	RMS	9.8	3.5	-7.68	-7.61	-0.07
3	7.2226	-68.47	RMS	9.8	3.5	-55.17	-46.01	-9.16

RMS - RMS detection

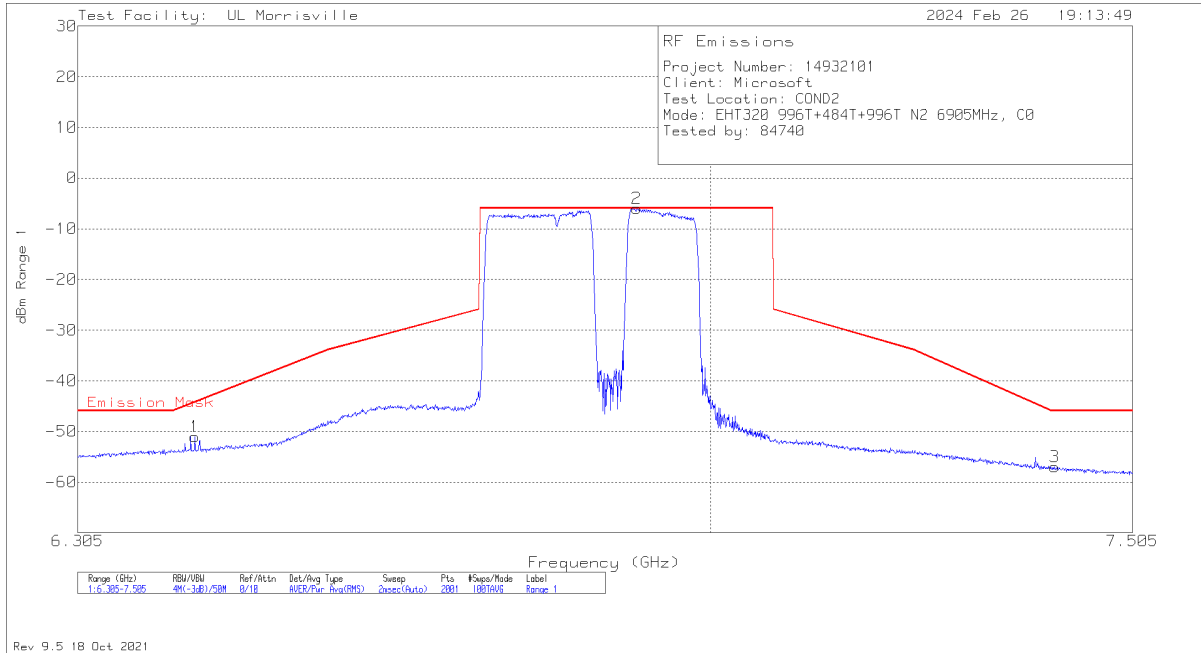

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.428	-64.53	RMS	9.9	3.6	-51.03	-44.26	-6.77
2	6.9152	-19.49	RMS	9.9	3.6	-5.99	-5.94	-.05
3	7.409	-70.51	RMS	9.9	3.6	-57.01	-45.94	-11.07


RMS - RMS detection

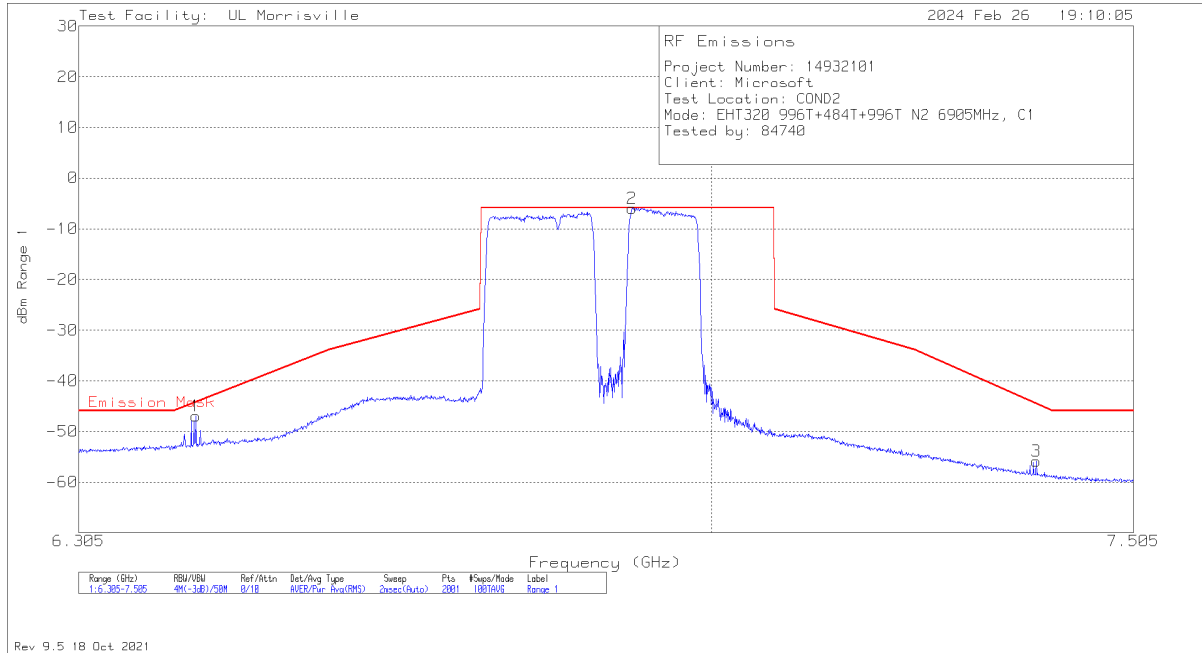

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.428	-60.25	RMS	9.8	3.5	-46.95	-44.21	-2.74
2	6.9086	-19.26	RMS	9.8	3.5	-5.96	-5.89	-0.07
3	7.3856	-69.12	RMS	9.8	3.5	-55.82	-44.5	-11.32


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) LOW POWER INDOOR

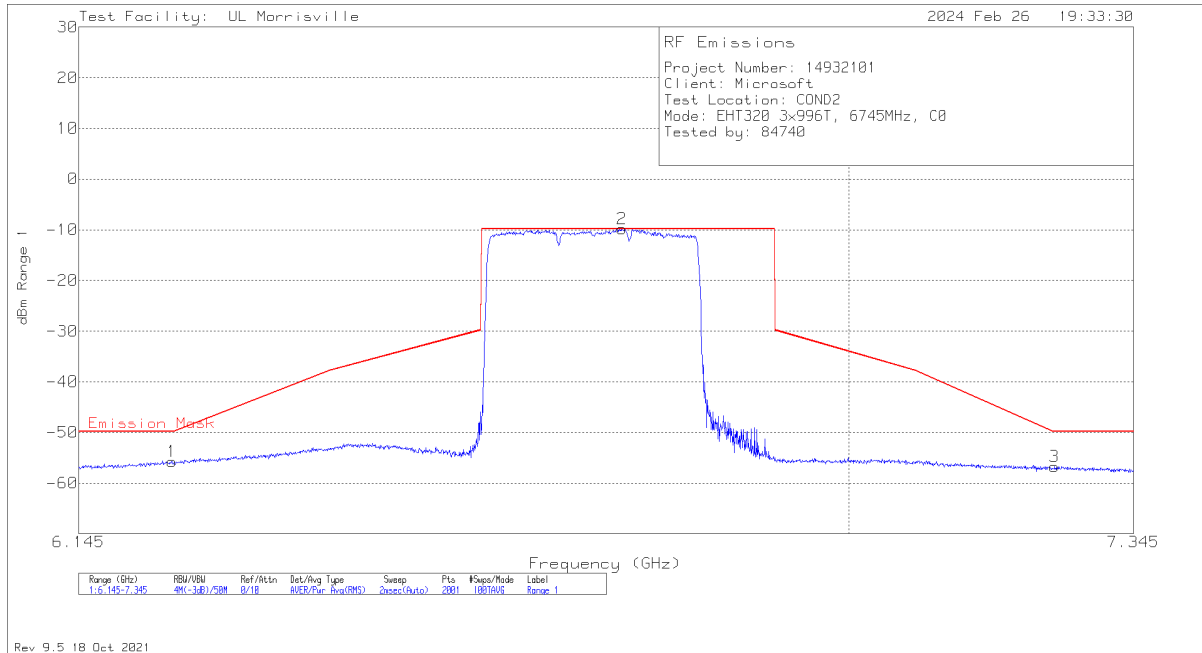


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2428	-69.22	RMS	9.9	3.6	-55.72	-49.83	-5.89
2	6.7366	-23.35	RMS	9.9	3.6	-9.85	-9.83	-.02
3	7.2478	-70.24	RMS	9.9	3.6	-56.74	-49.83	-6.91

RMS - RMS detection

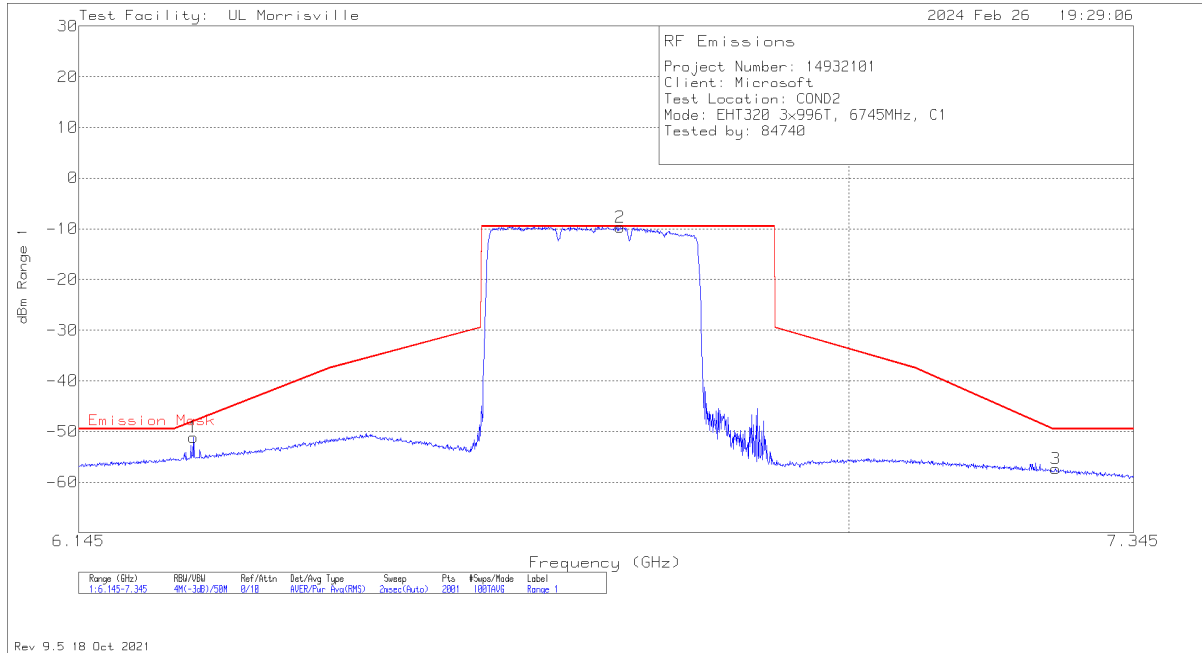


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.265	-64.43	RMS	9.8	3.5	-51.13	-48.05	-3.08
2	6.7342	-23.02	RMS	9.8	3.5	-9.72	-9.51	-.21
3	7.249	-70.67	RMS	9.8	3.5	-57.37	-49.51	-7.86

RMS - RMS detection

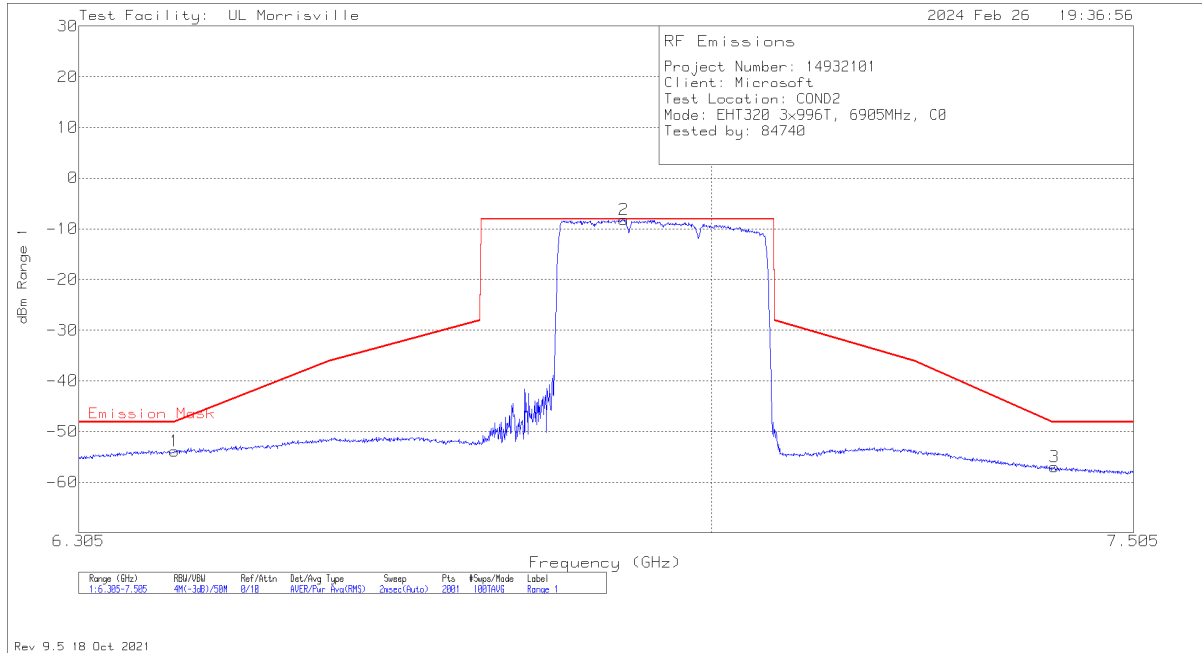

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4058	-67.42	RMS	9.9	3.6	-53.92	-48.05	-5.87
2	6.899	-21.72	RMS	9.9	3.6	-8.22	-8.11	-1.11
3	7.4078	-70.5	RMS	9.9	3.6	-57	-48.11	-8.89


RMS - RMS detection

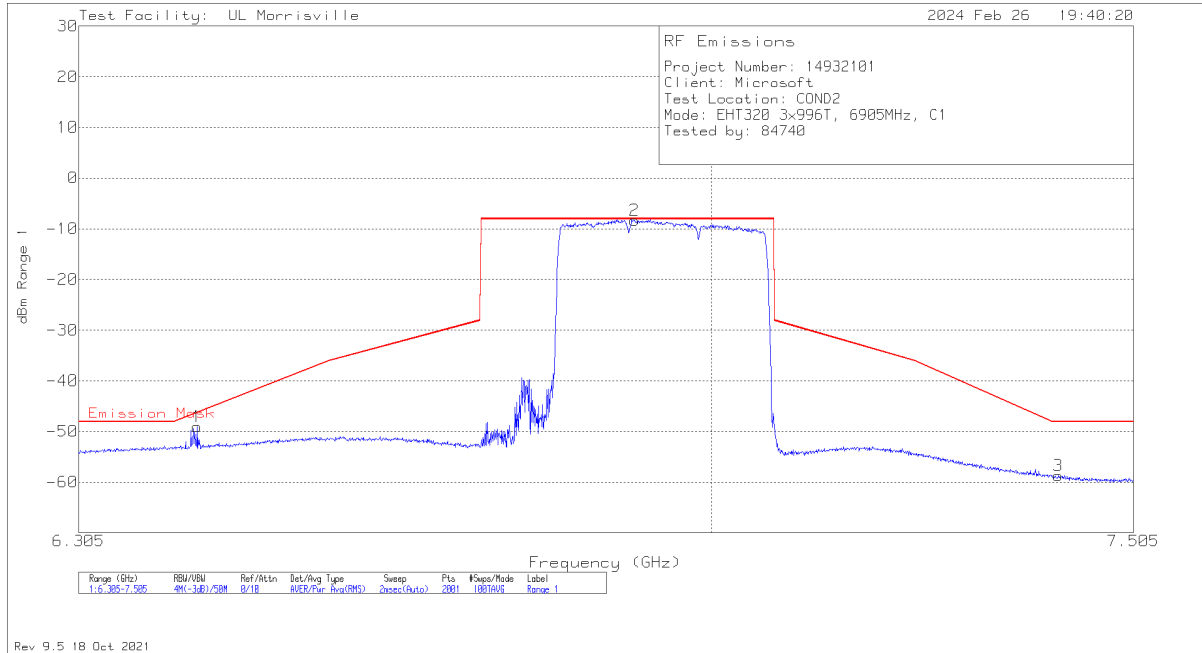

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4298	-62.39	RMS	9.8	3.5	-49.09	-46.28	-2.81
2	6.9116	-21.63	RMS	9.8	3.5	-8.33	-8.09	-.24
3	7.4126	-72	RMS	9.8	3.5	-58.7	-48.09	-10.61


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) LOW POWER INDOOR

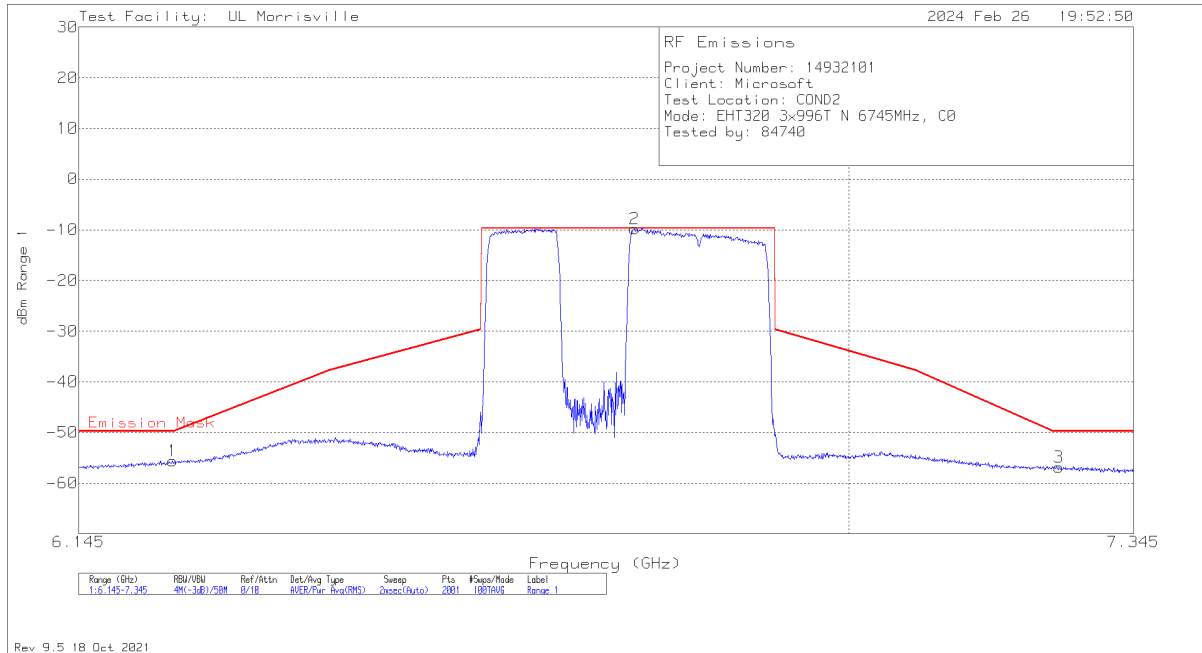


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2434	-69.1	RMS	9.9	3.6	-55.6	-49.73	-5.87
2	6.751	-23.31	RMS	9.9	3.6	-9.81	-9.73	-.08
3	7.2532	-70.36	RMS	9.9	3.6	-56.86	-49.73	-7.13

RMS - RMS detection

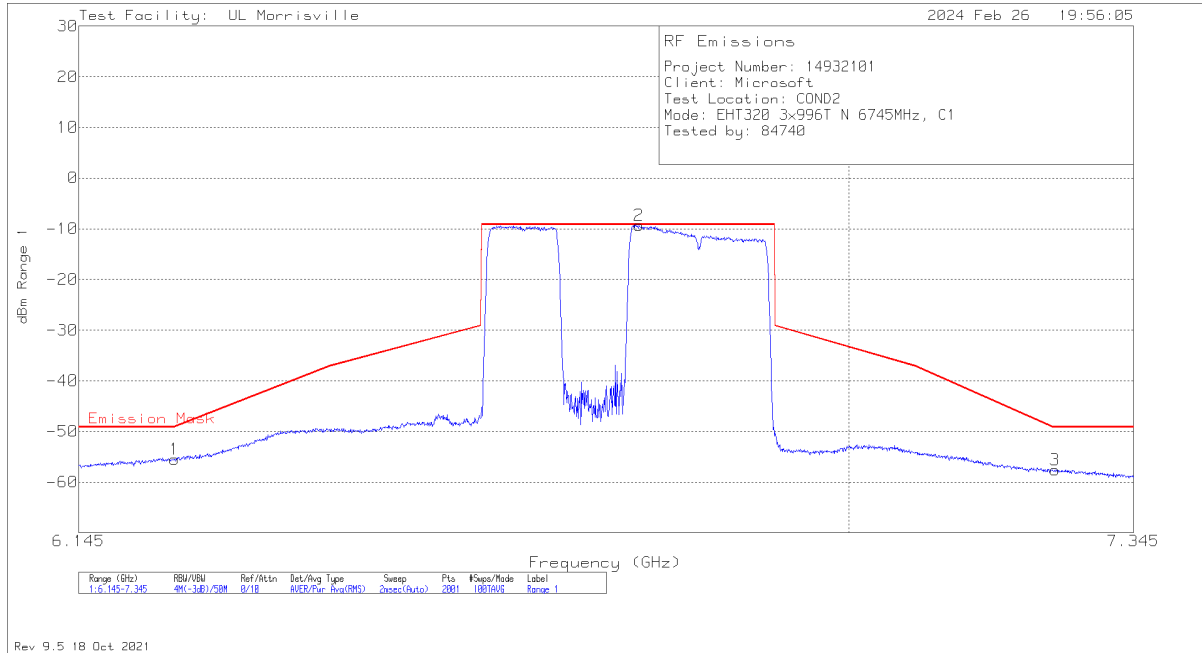


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2452	-68.75	RMS	9.8	3.5	-55.45	-49.12	-6.33
2	6.7558	-22.62	RMS	9.8	3.5	-9.32	-9.13	-.19
3	7.2484	-70.85	RMS	9.8	3.5	-57.55	-49.13	-8.42

RMS - RMS detection

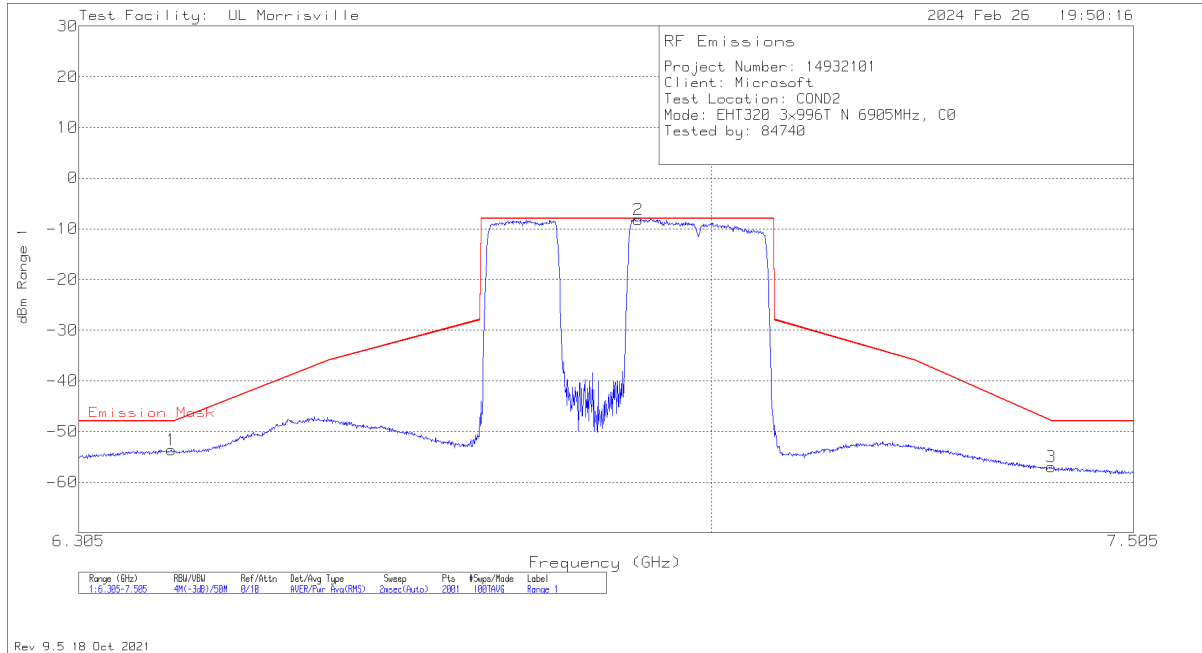

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4022	-67.15	RMS	9.9	3.6	-53.65	-47.97	-5.68
2	6.9158	-21.7	RMS	9.9	3.6	-8.2	-7.97	-2.23
3	7.4036	-70.42	RMS	9.9	3.6	-56.92	-47.87	-9.05


RMS - RMS detection

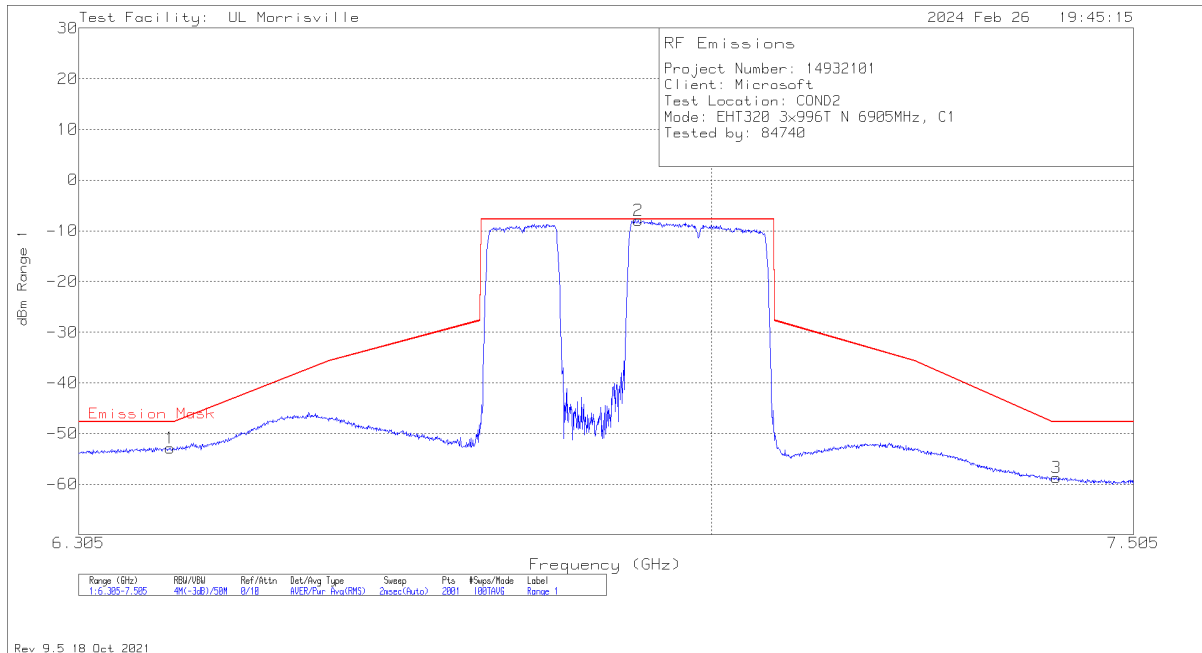

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.401	-66.16	RMS	9.8	3.5	-52.86	-47.73	-5.13
2	6.9158	-21.26	RMS	9.8	3.5	-7.96	-7.73	-.23
3	7.4102	-71.97	RMS	9.8	3.5	-58.67	-47.73	-10.94


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) LOW POWER INDOOR

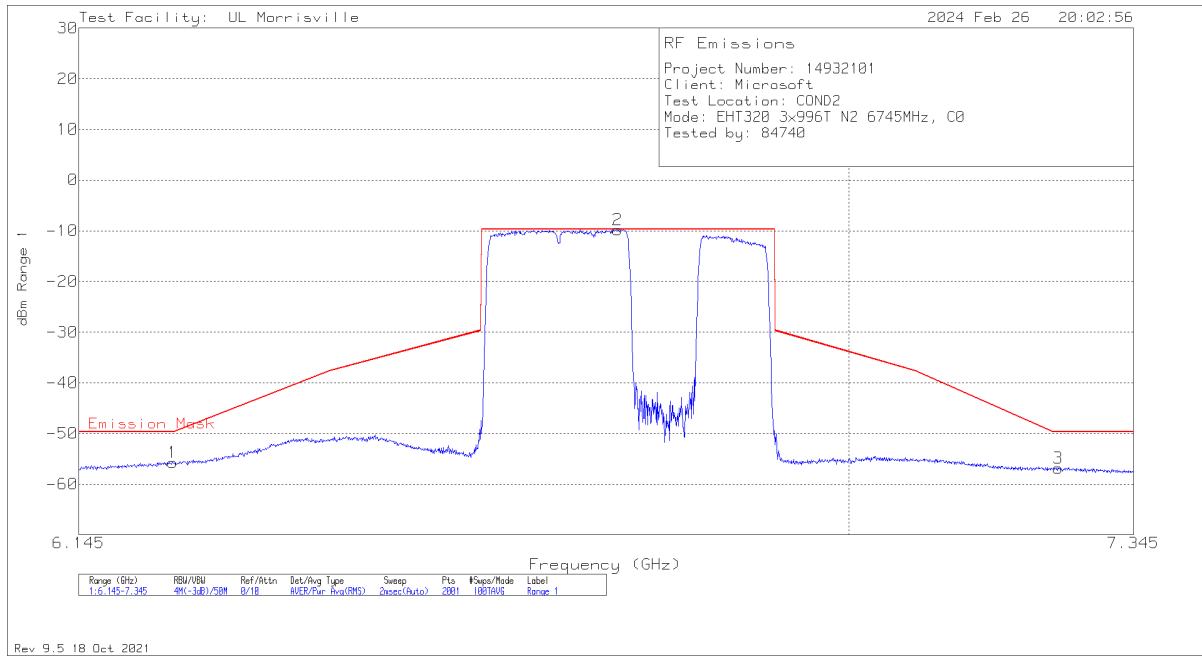


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2434	-69.19	RMS	9.9	3.6	-55.69	-49.71	-5.98
2	6.7312	-23.33	RMS	9.9	3.6	-9.83	-9.71	-.12
3	7.252	-70.3	RMS	9.9	3.6	-56.8	-49.71	-7.09

RMS - RMS detection

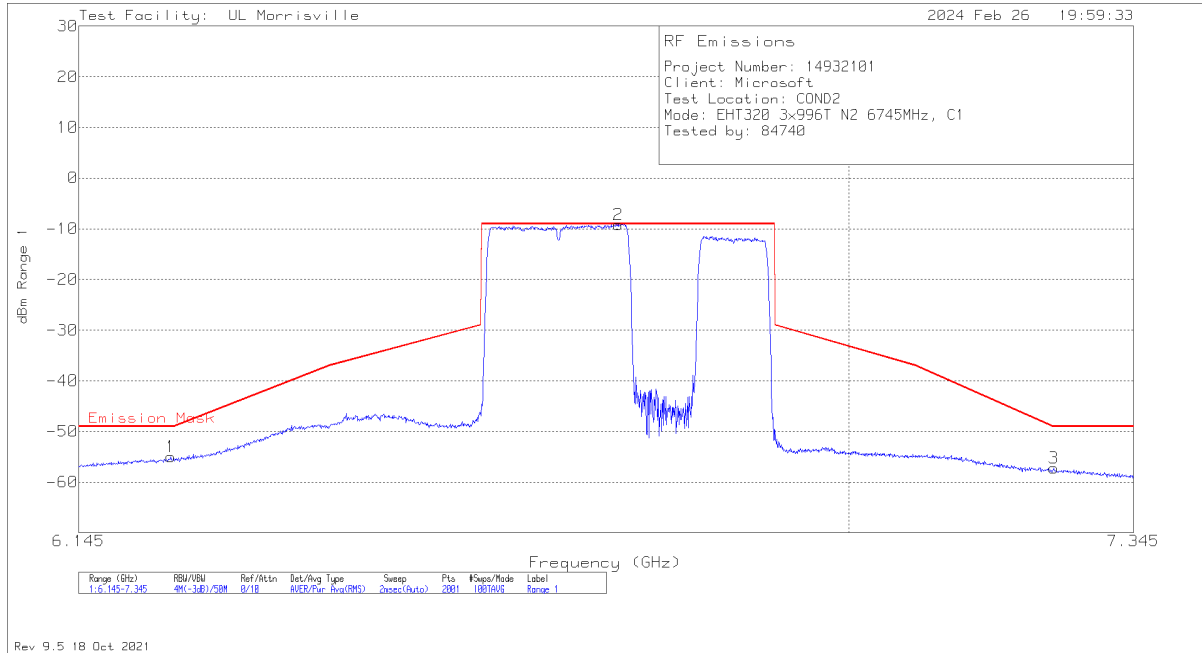


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2416	-68.33	RMS	9.8	3.5	-55.03	-49.04	-5.99
2	6.7324	-22.44	RMS	9.8	3.5	-9.14	-9.04	-.1
3	7.2466	-70.51	RMS	9.8	3.5	-57.21	-49.04	-8.17

RMS - RMS detection

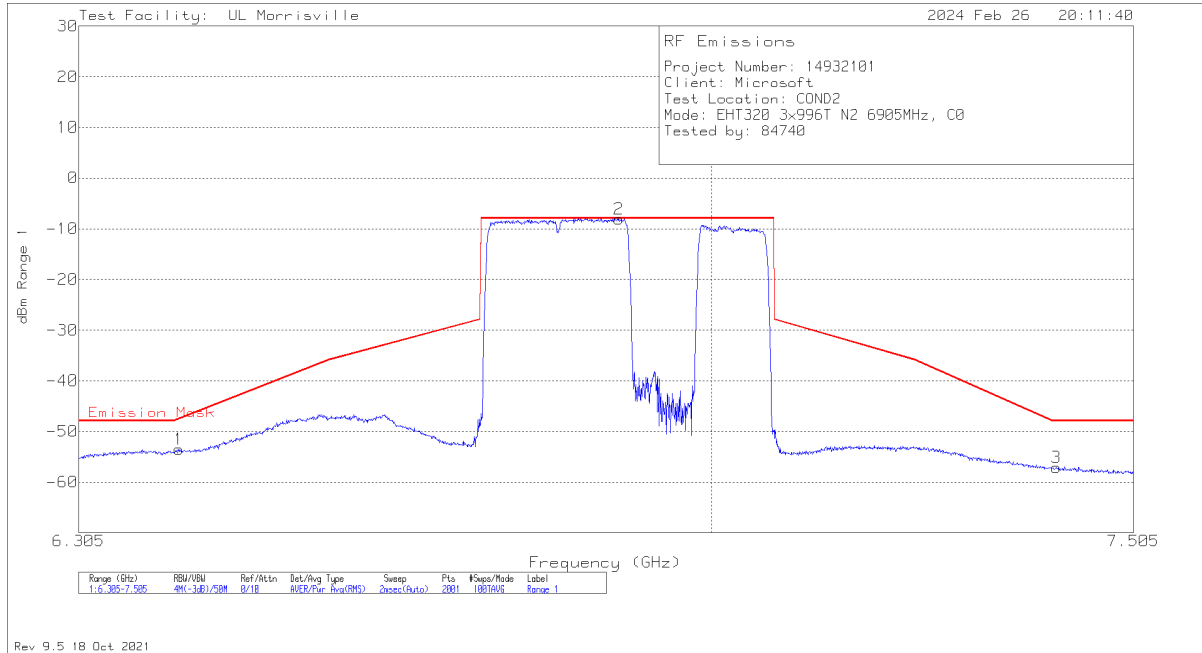

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.41	-66.94	RMS	9.9	3.6	-53.44	-47.56	-5.88
2	6.8936	-21.54	RMS	9.9	3.6	-8.04	-7.93	-1.11
3	7.4102	-70.63	RMS	9.9	3.6	-57.13	-47.93	-9.2


RMS - RMS detection

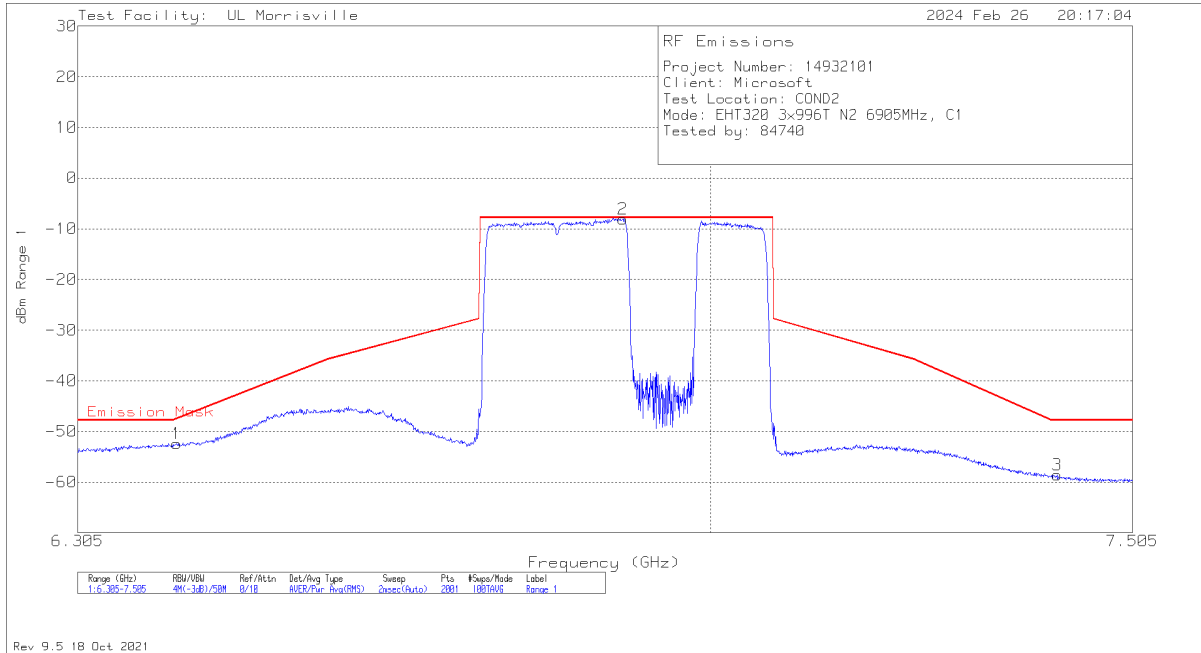

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4088	-65.73	RMS	9.8	3.5	-52.43	-47.52	-4.91
2	6.899	-21.33	RMS	9.8	3.5	-8.03	-7.8	-2.23
3	7.412	-71.92	RMS	9.8	3.5	-58.62	-47.8	-10.82


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) LOW POWER INDOOR

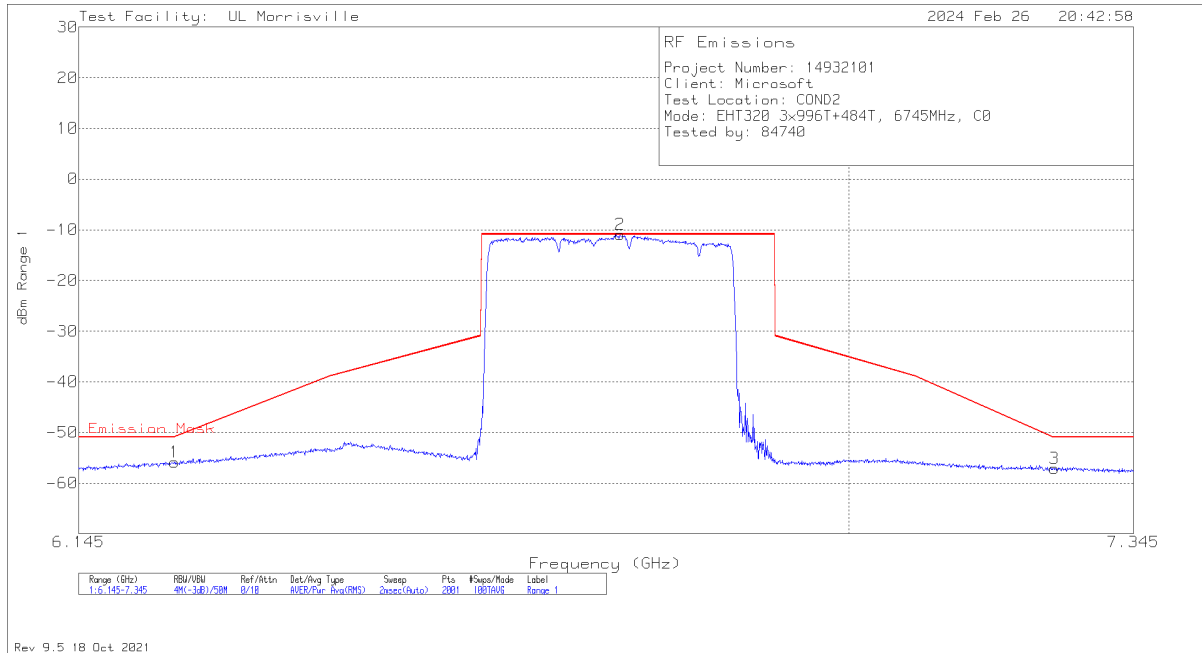


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2452	-69.34	RMS	9.9	3.6	-55.84	-50.9	-4.94
2	6.7342	-24.47	RMS	9.9	3.6	-10.97	-10.91	-.06
3	7.2472	-70.61	RMS	9.9	3.6	-57.11	-50.91	-6.2

RMS - RMS detection

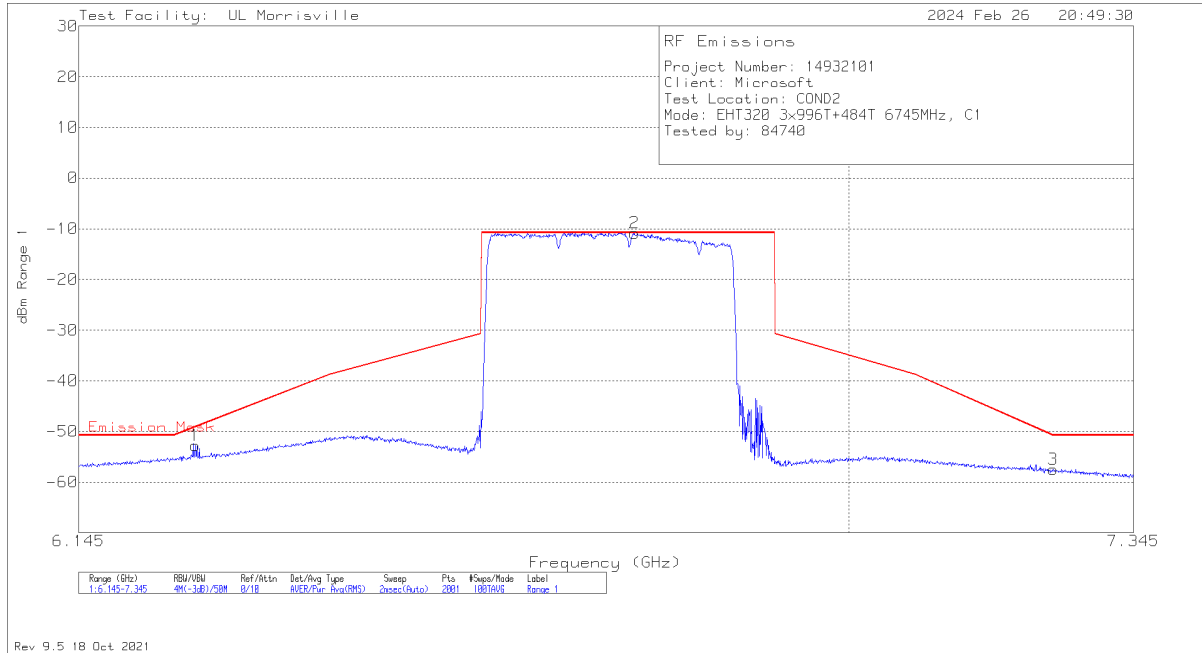


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2674	-66.08	RMS	9.8	3.5	-52.78	-49.14	-3.64
2	6.7504	-24.16	RMS	9.8	3.5	-10.86	-10.78	-.08
3	7.246	-70.73	RMS	9.8	3.5	-57.43	-50.78	-6.65

RMS - RMS detection

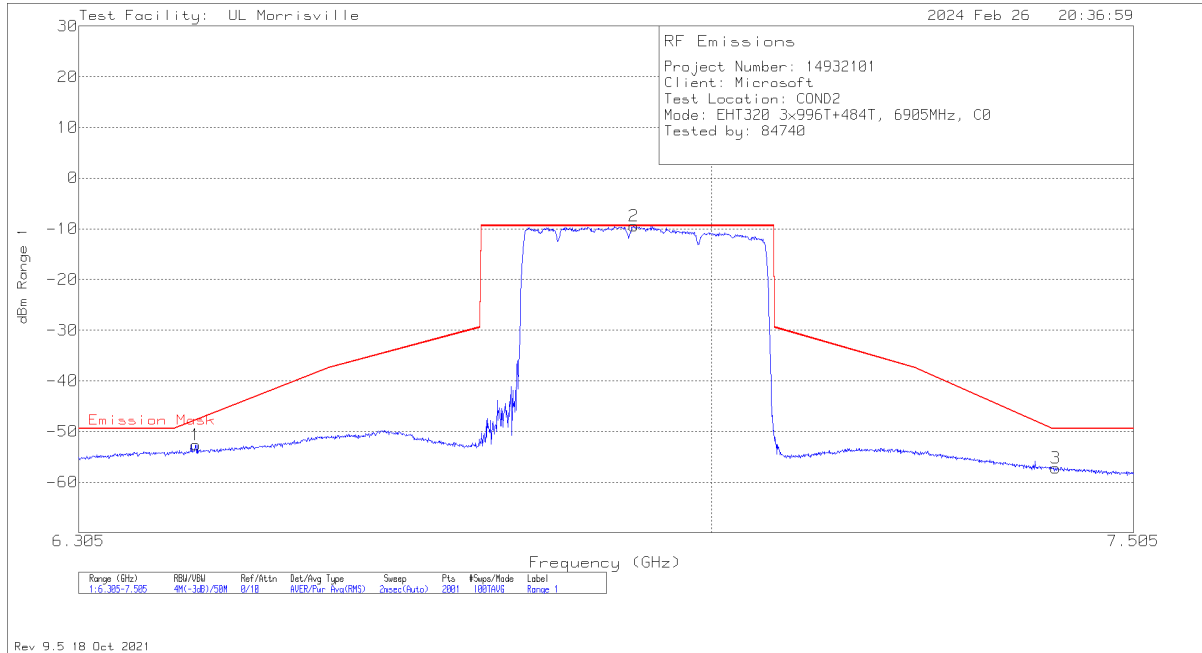

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.428	-66.14	RMS	9.9	3.6	-52.64	-47.75	-4.89
2	6.9104	-22.99	RMS	9.9	3.6	-9.49	-9.43	-0.06
3	7.4096	-70.72	RMS	9.9	3.6	-57.22	-49.43	-7.79

RMS - RMS detection

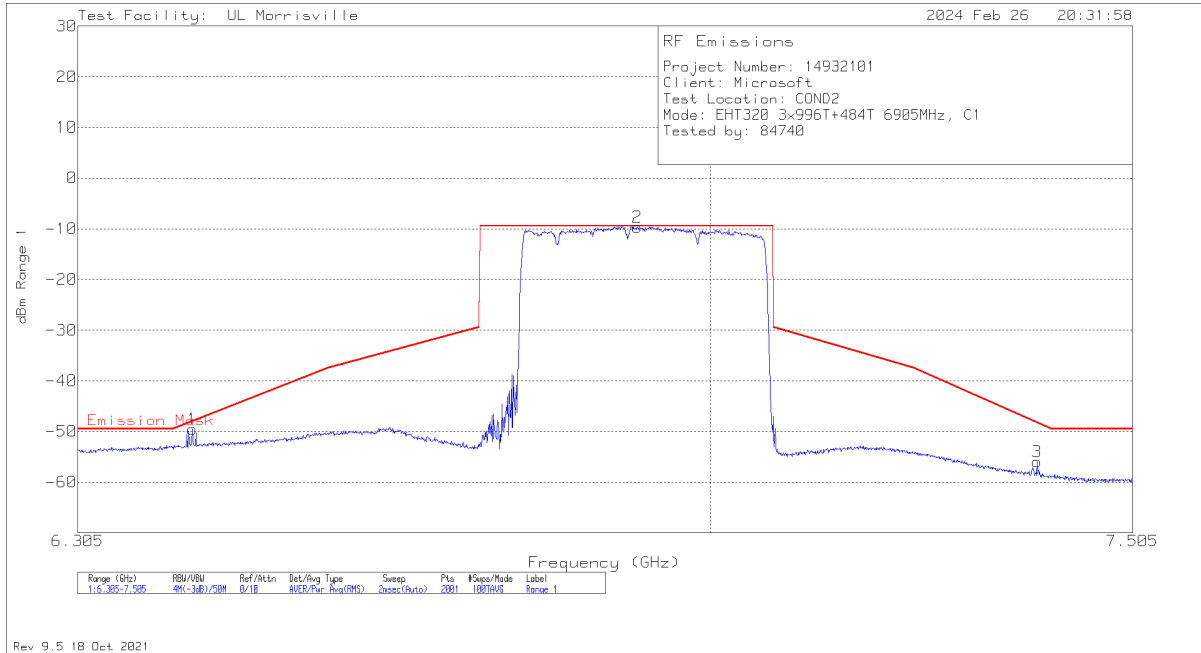

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4256	-62.88	RMS	9.8	3.5	-49.58	-47.98	-1.6
2	6.9158	-23.04	RMS	9.8	3.5	-9.74	-9.49	-2.25
3	7.388	-69.23	RMS	9.8	3.5	-55.93	-48.27	-7.66


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) LOW POWER INDOOR




Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2428	-69.31	RMS	9.9	3.6	-55.81	-51.1	-4.71
2	6.7588	-24.71	RMS	9.9	3.6	-11.21	-11.1	-.11
3	7.2496	-70.49	RMS	9.9	3.6	-56.99	-51.1	-5.89

RMS - RMS detection

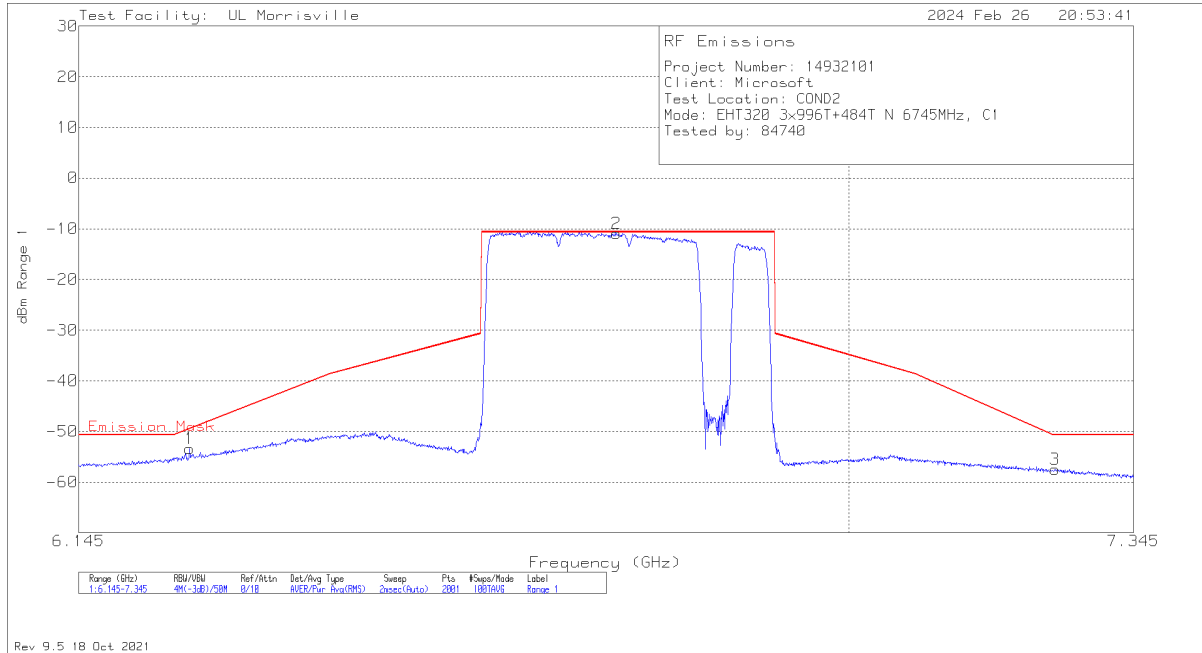


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2614	-66.66	RMS	9.8	3.5	-53.36	-49.48	-3.88
2	6.73	-24.17	RMS	9.8	3.5	-10.87	-10.68	-.19
3	7.2484	-70.76	RMS	9.8	3.5	-57.46	-50.68	-6.78

RMS - RMS detection

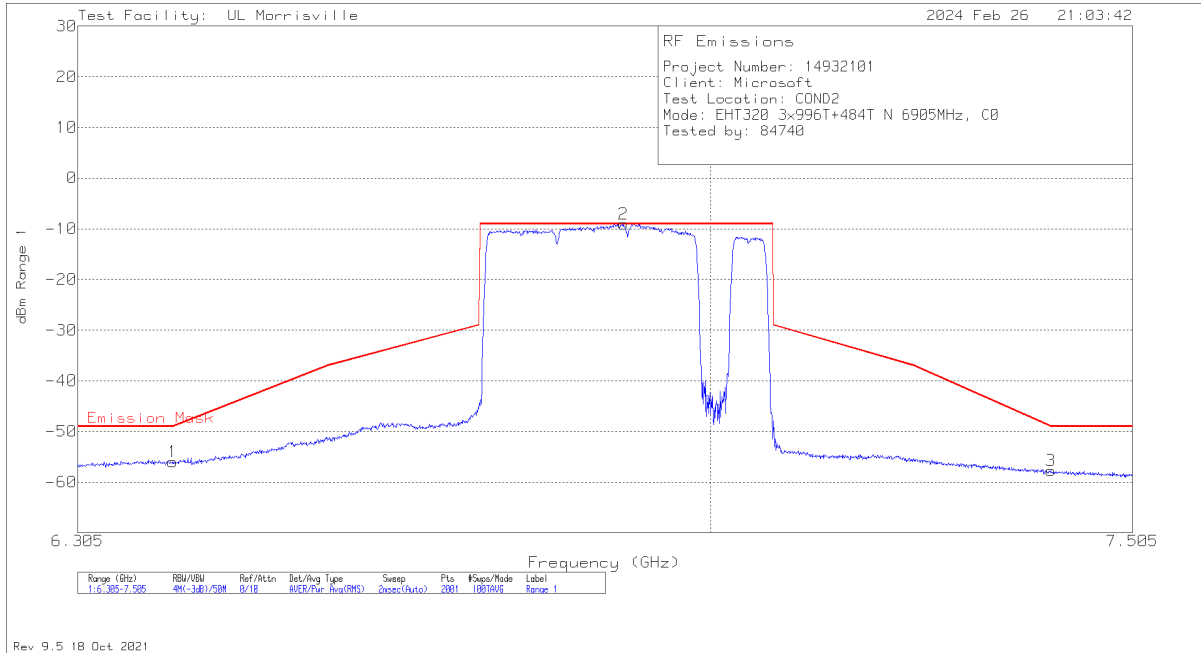

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4046	-69.47	RMS	9.9	3.6	-55.97	-49.02	-6.95
2	6.8996	-22.62	RMS	9.9	3.6	-9.12	-9.02	-.1
3	7.4048	-71.2	RMS	9.9	3.6	-57.7	-49.01	-8.69


RMS - RMS detection

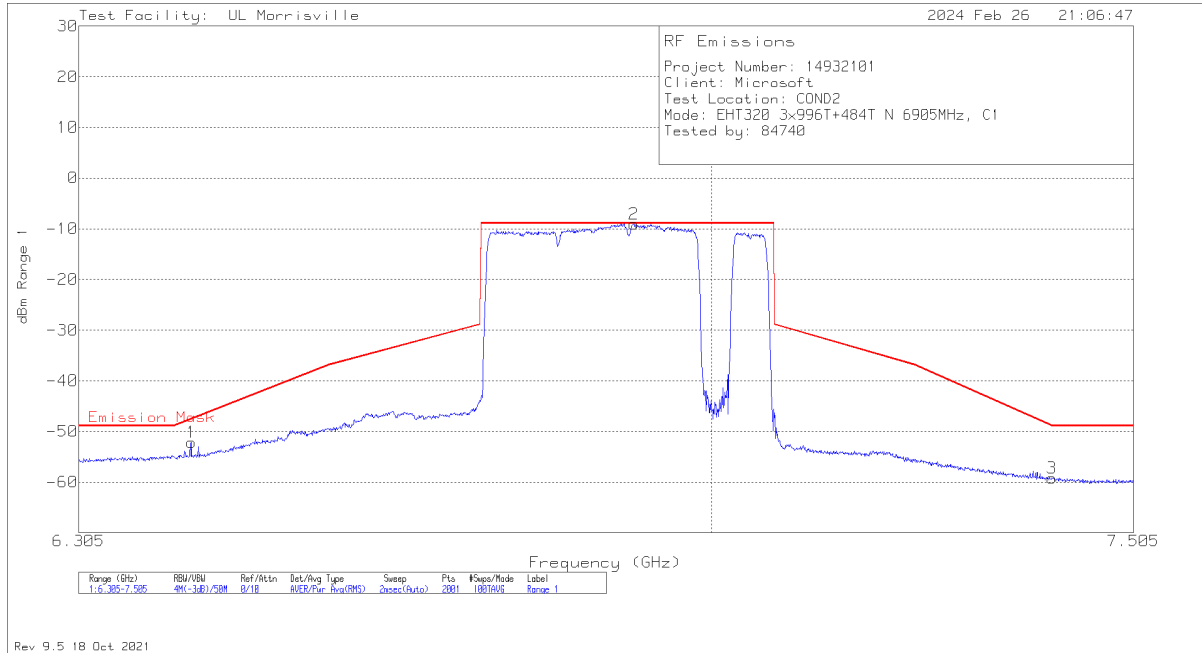

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4232	-65.39	RMS	9.8	3.5	-52.09	-47.56	-4.53
2	6.9104	-22.33	RMS	9.8	3.5	-9.03	-8.89	-.14
3	7.4048	-72.45	RMS	9.8	3.5	-59.15	-48.88	-10.27


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS) LOW POWER INDOOR

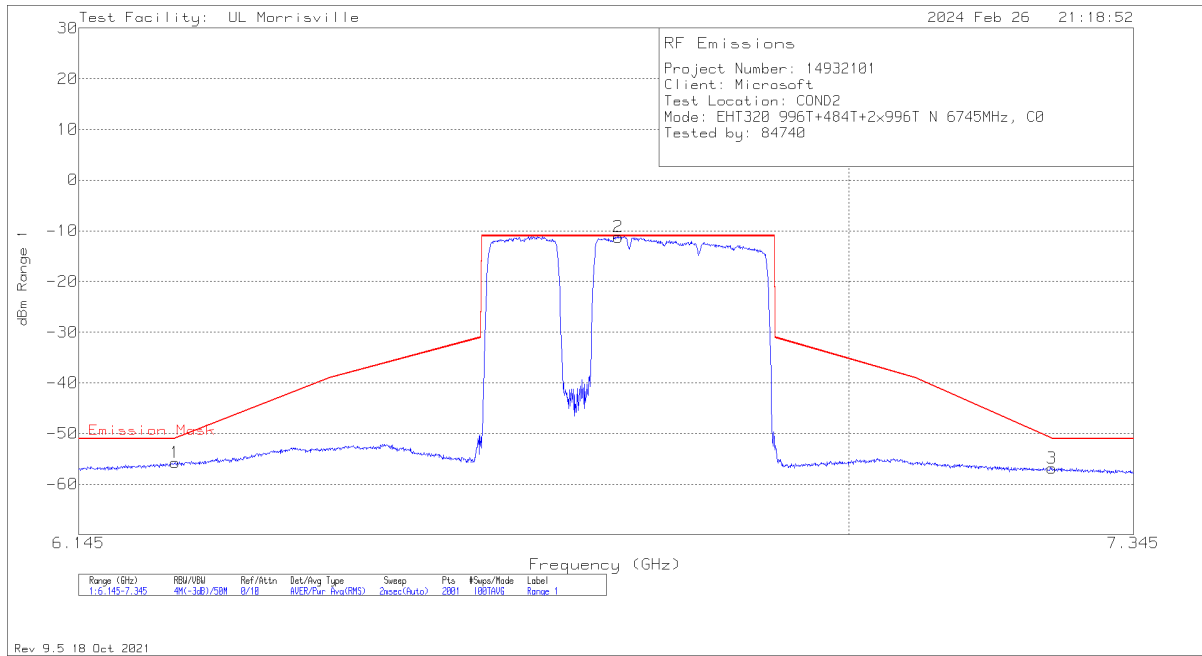


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2458	-69.27	RMS	9.9	3.6	-55.77	-50.98	-4.79
2	6.7324	-24.73	RMS	9.9	3.6	-11.23	-11.04	-.19
3	7.2448	-70.29	RMS	9.9	3.6	-56.79	-51.03	-5.76

RMS - RMS detection

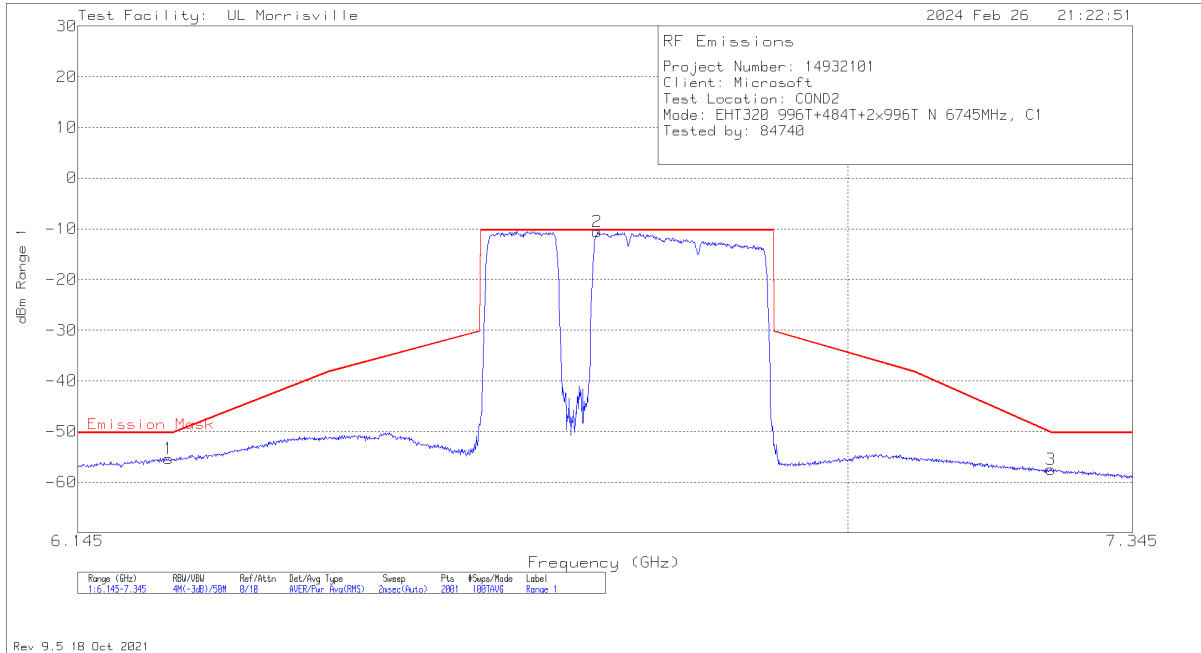


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2404	-68.65	RMS	9.8	3.5	-55.35	-50.25	-5.1
2	6.7096	-23.85	RMS	9.8	3.5	-10.55	-10.25	-.3
3	7.2442	-70.76	RMS	9.8	3.5	-57.46	-50.19	-7.27

RMS - RMS detection

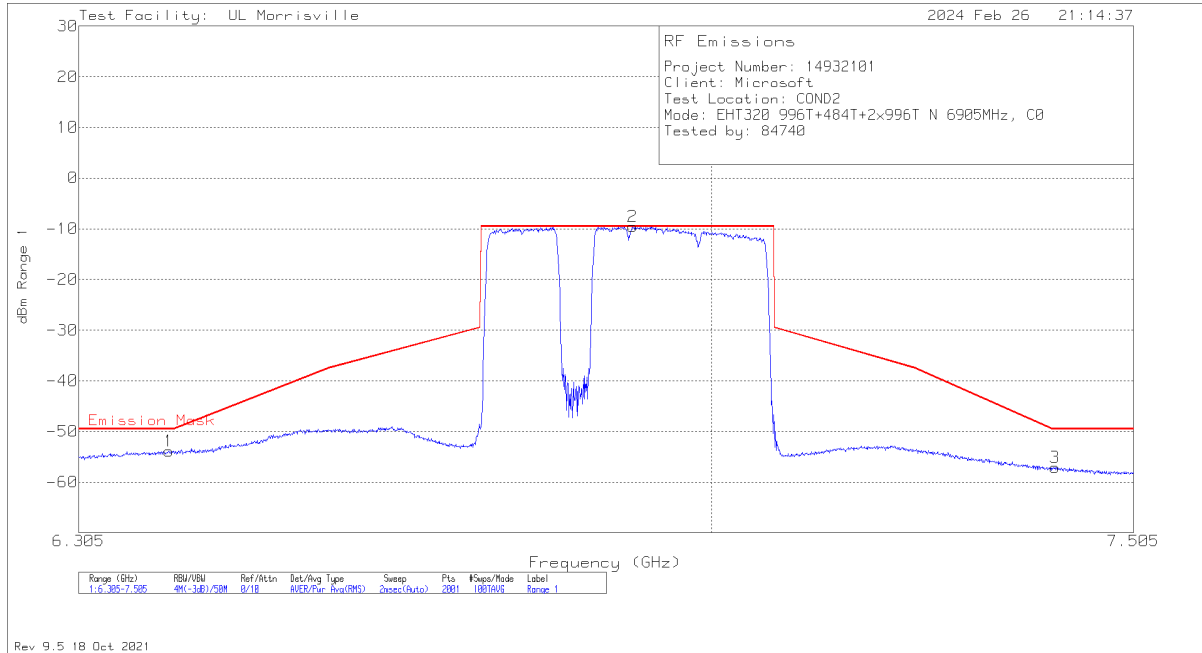

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.3998	-67.35	RMS	9.9	3.6	-53.85	-49.52	-4.33
2	6.9092	-23.06	RMS	9.9	3.6	-9.56	-9.52	-.04
3	7.4084	-70.63	RMS	9.9	3.6	-57.13	-49.52	-7.61


RMS - RMS detection

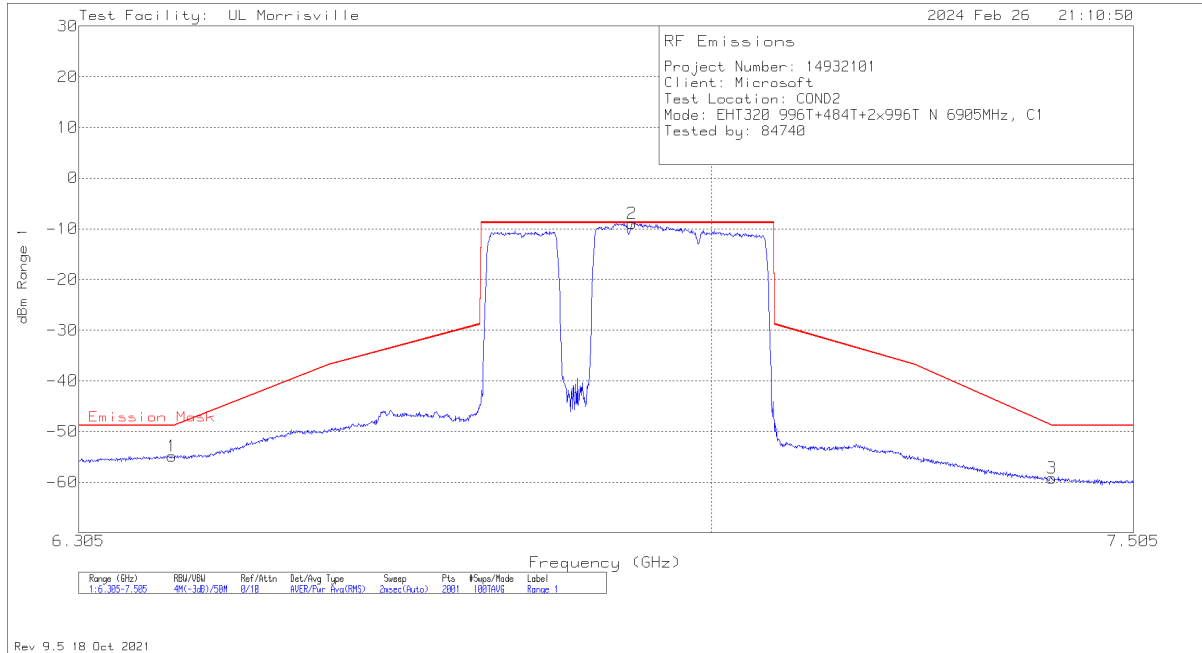

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4028	-68.19	RMS	9.8	3.5	-54.89	-48.81	-6.08
2	6.9086	-22.22	RMS	9.8	3.5	-8.92	-8.81	-.11
3	7.4048	-72.54	RMS	9.8	3.5	-59.24	-48.8	-10.44


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2) LOW POWER INDOOR

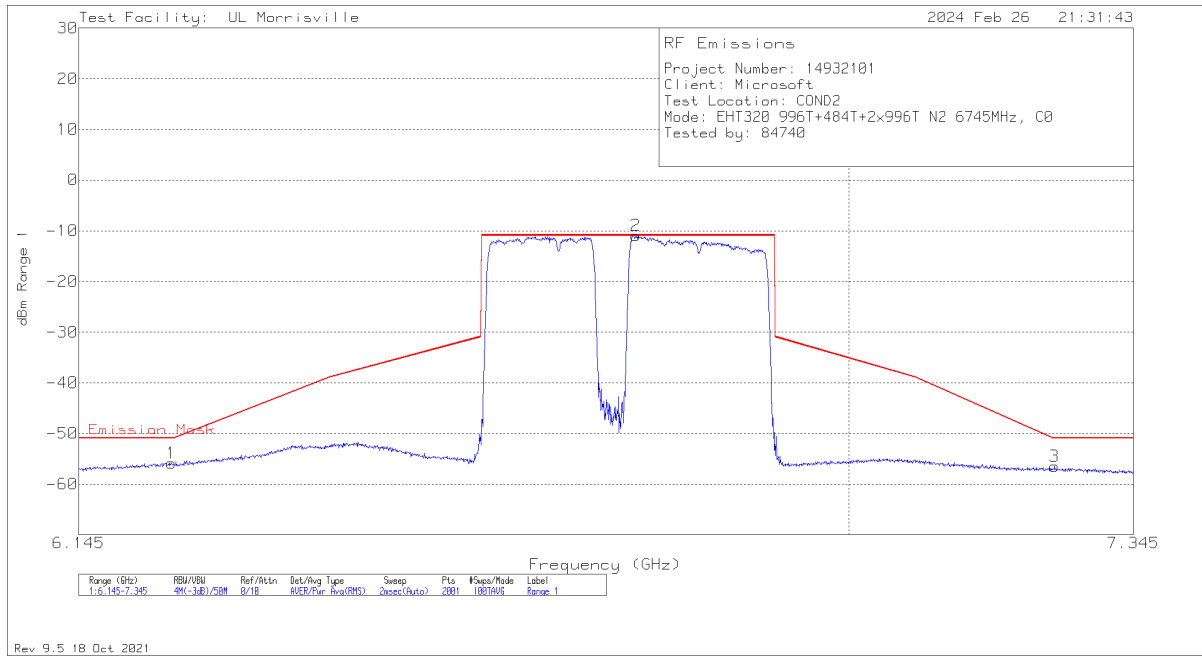


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2422	-69.31	RMS	9.9	3.6	-55.81	-50.93	-4.88
2	6.7522	-24.44	RMS	9.9	3.6	-10.94	-10.93	-.01
3	7.2478	-70.01	RMS	9.9	3.6	-56.51	-50.93	-5.58

RMS - RMS detection

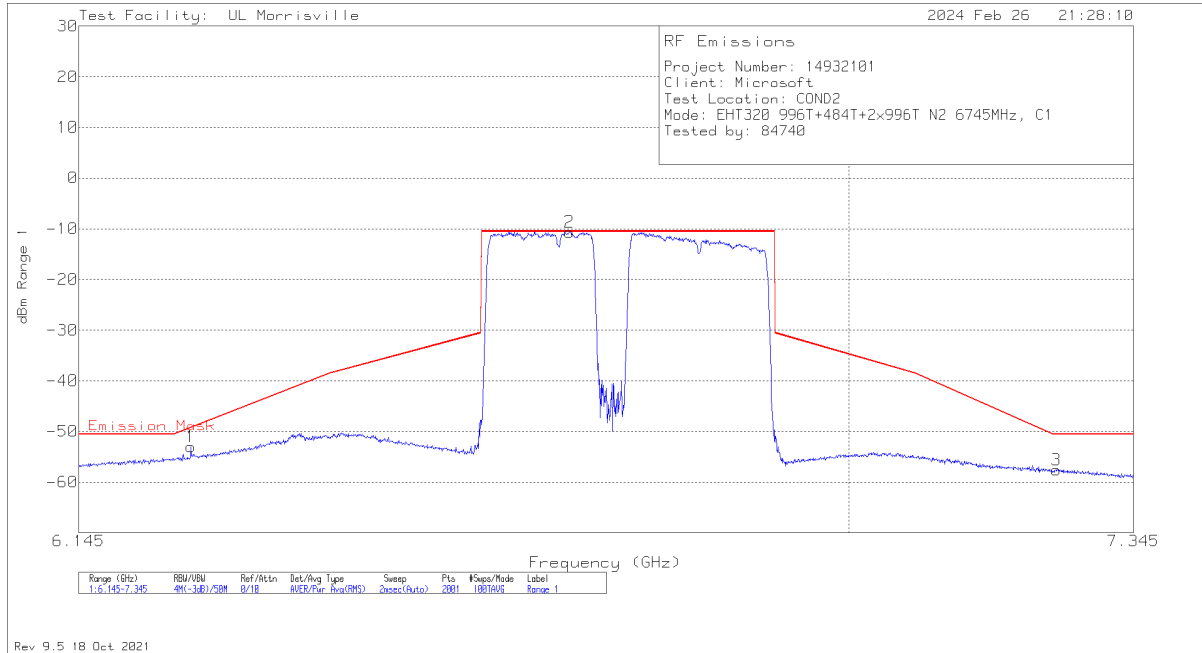


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2626	-66.34	RMS	9.8	3.5	-53.04	-49.27	-3.77
2	6.6766	-23.92	RMS	9.8	3.5	-10.62	-10.56	-.06
3	7.2496	-70.86	RMS	9.8	3.5	-57.56	-50.56	-7

RMS - RMS detection

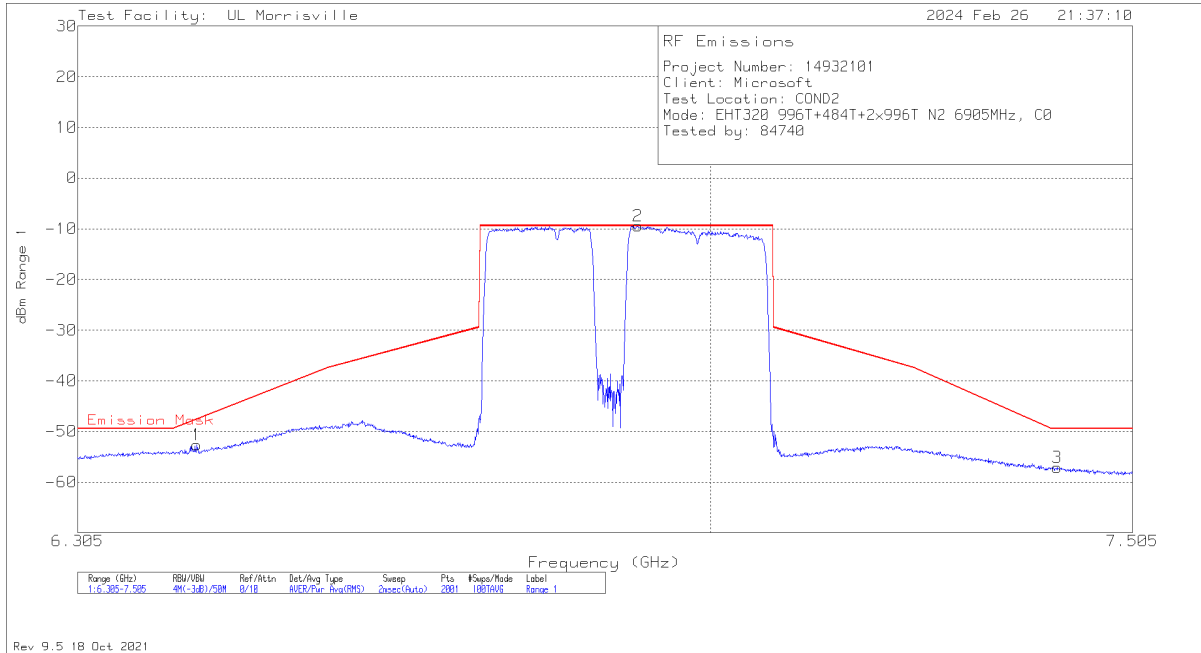

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4304	-66.08	RMS	9.9	3.6	-52.58	-47.57	-5.01
2	6.9164	-22.99	RMS	9.9	3.6	-9.49	-9.43	-0.06
3	7.412	-70.53	RMS	9.9	3.6	-57.03	-49.43	-7.6


RMS - RMS detection

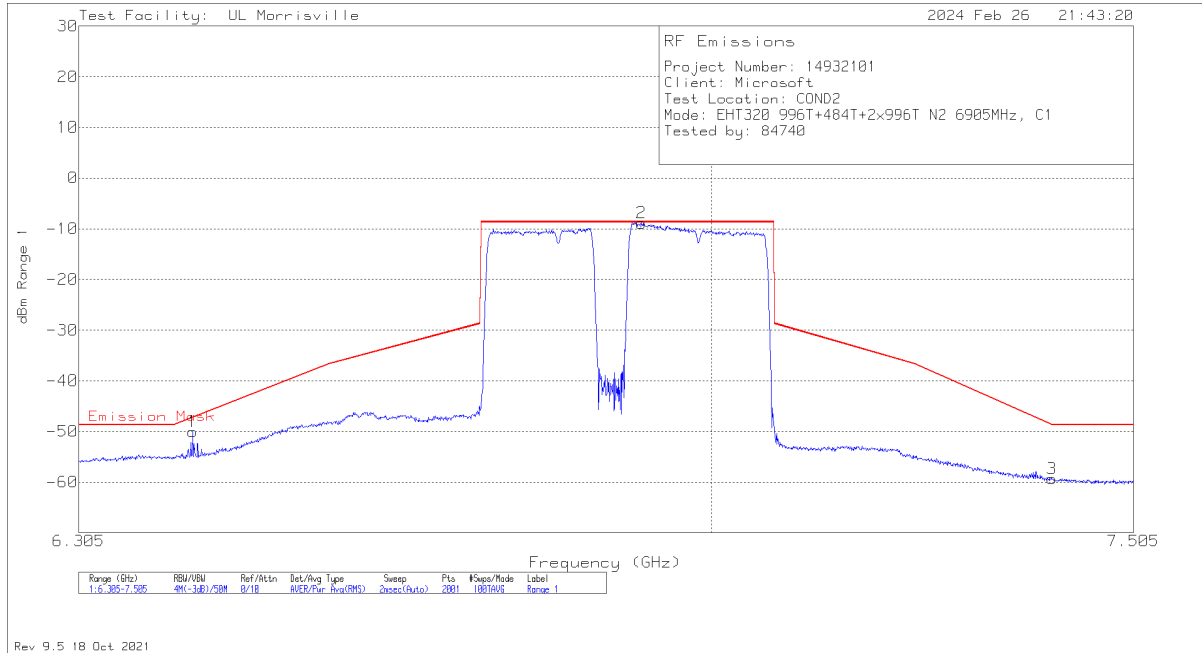

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.425	-63.33	RMS	9.8	3.5	-50.03	-47.24	-2.79
2	6.9194	-22.18	RMS	9.8	3.5	-8.88	-8.7	-.18
3	7.4048	-72.64	RMS	9.8	3.5	-59.34	-48.69	-10.65


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS) LOW POWER INDOOR

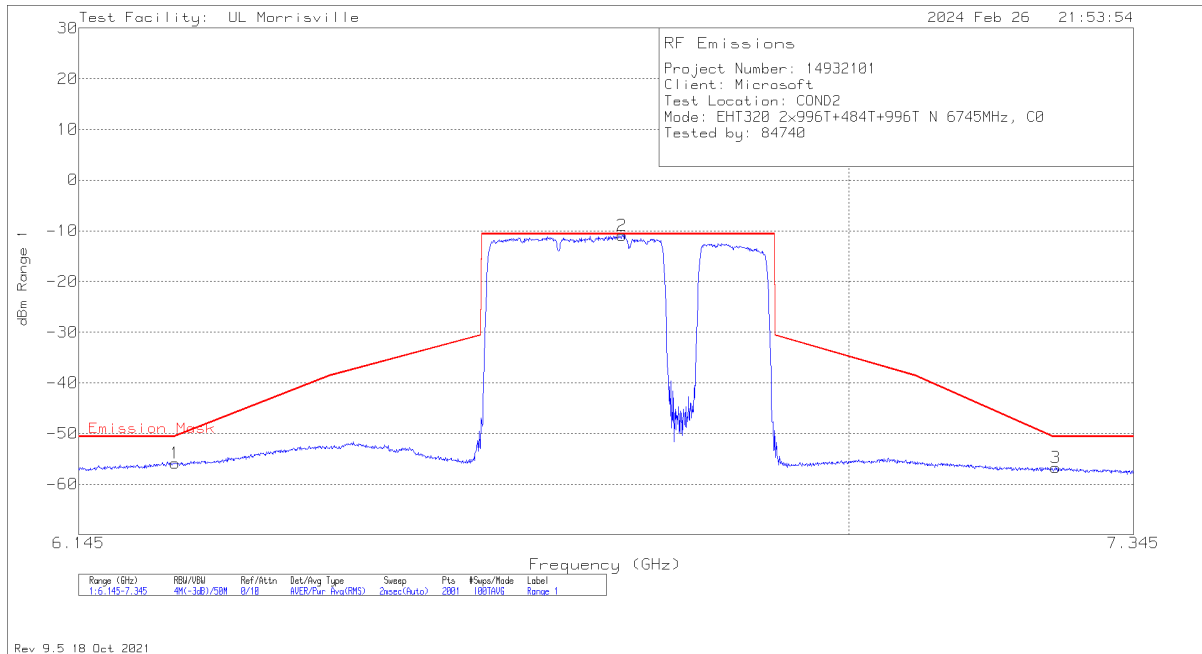


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2458	-69.35	RMS	9.9	3.6	-55.85	-50.58	-5.27
2	6.7366	-24.43	RMS	9.9	3.6	-10.93	-10.64	-.29
3	7.249	-70.26	RMS	9.9	3.6	-56.76	-50.64	-6.12

RMS - RMS detection

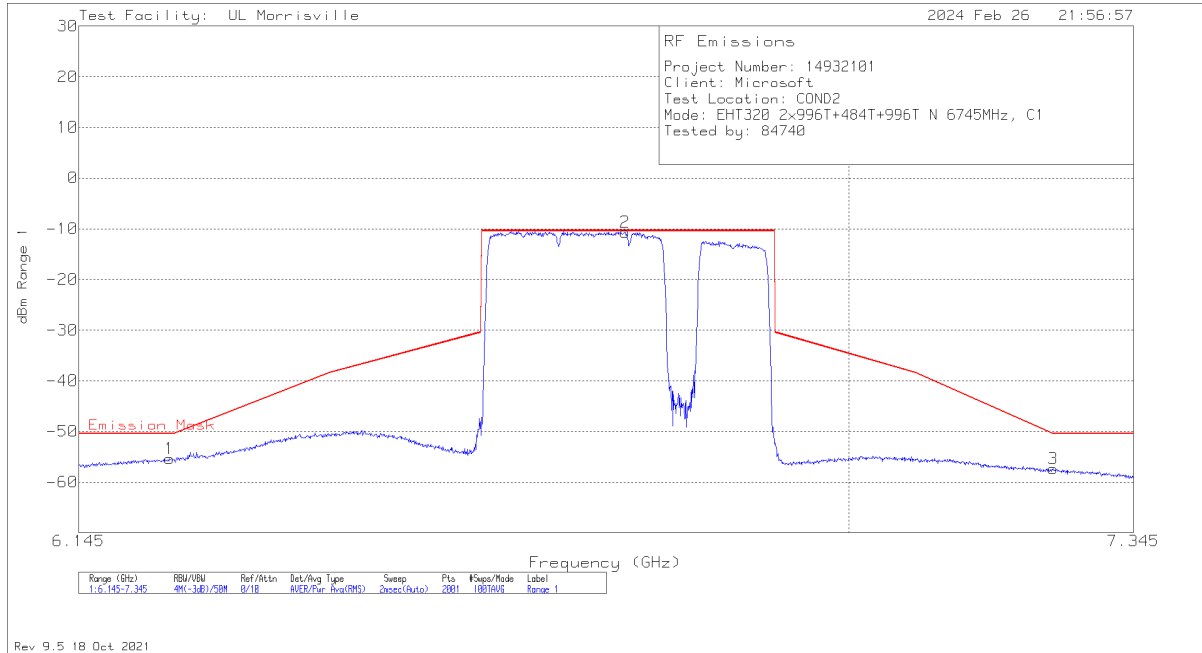


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2404	-68.6	RMS	9.8	3.5	-55.3	-50.43	-4.87
2	6.7402	-23.99	RMS	9.8	3.5	-10.69	-10.43	-2.26
3	7.246	-70.68	RMS	9.8	3.5	-57.38	-50.43	-6.95

RMS - RMS detection

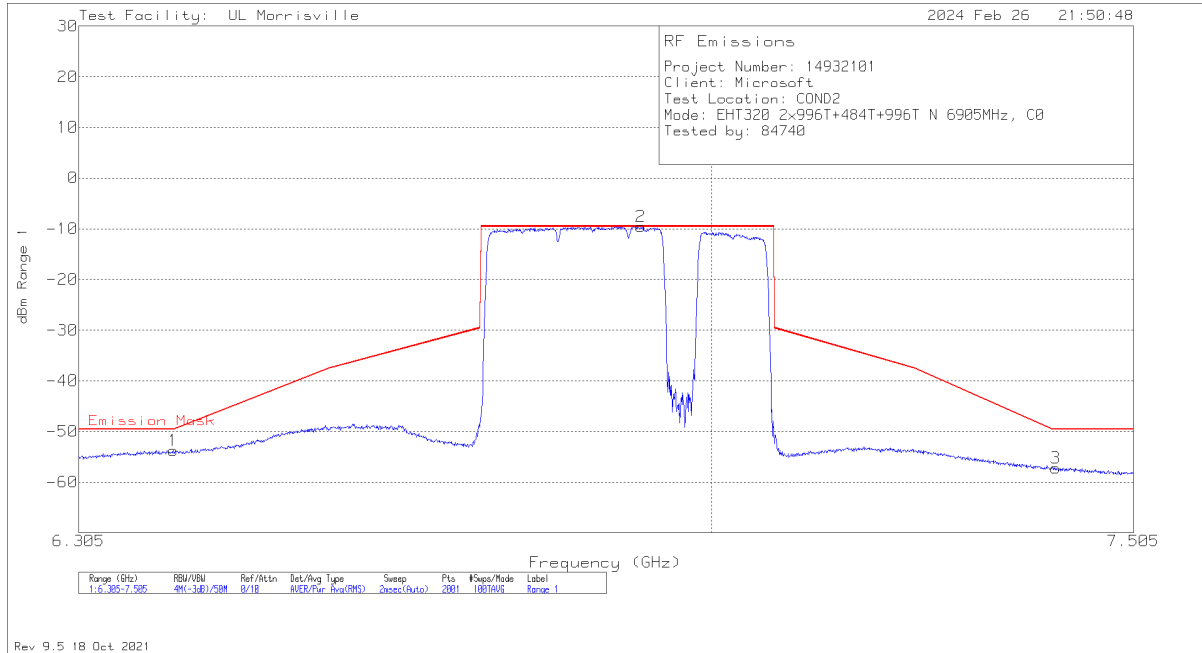

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.404	-67.22	RMS	9.9	3.6	-53.72	-49.56	-4.16
2	6.9188	-23.1	RMS	9.9	3.6	-9.6	-9.56	-.04
3	7.4096	-70.72	RMS	9.9	3.6	-57.22	-49.56	-7.66


RMS - RMS detection

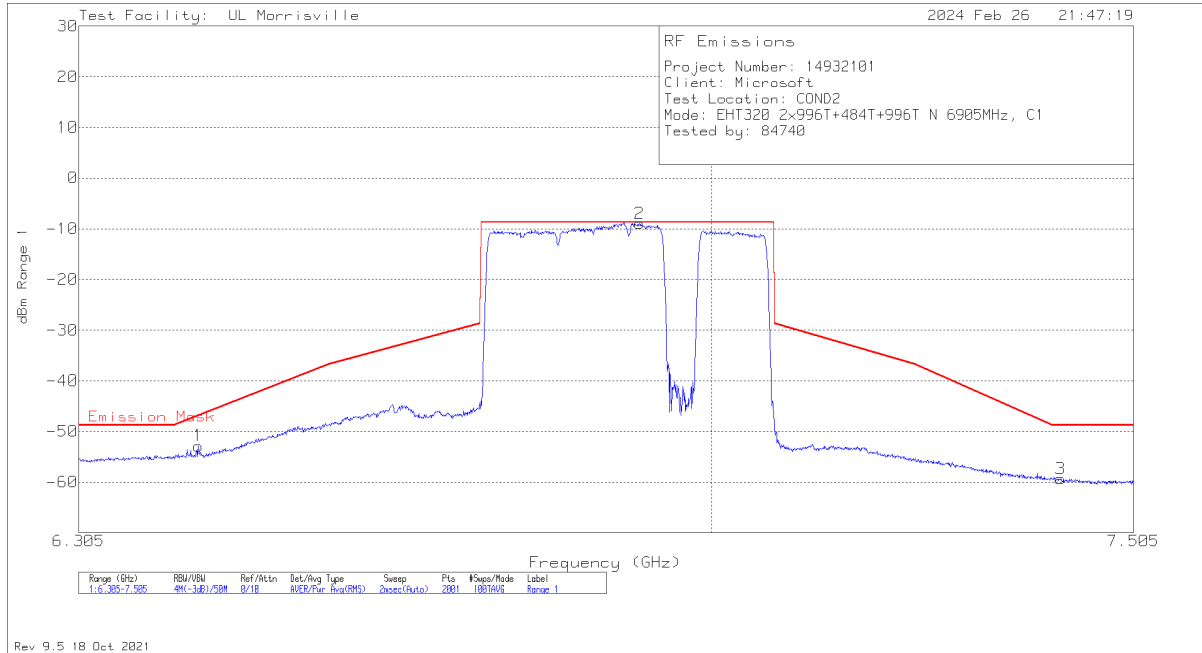

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.431	-66.11	RMS	9.8	3.5	-52.81	-46.84	-5.97
2	6.917	-22.26	RMS	9.8	3.5	-8.96	-8.74	-2.22
3	7.415	-72.63	RMS	9.8	3.5	-59.33	-48.74	-10.59


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2) LOW POWER INDOOR

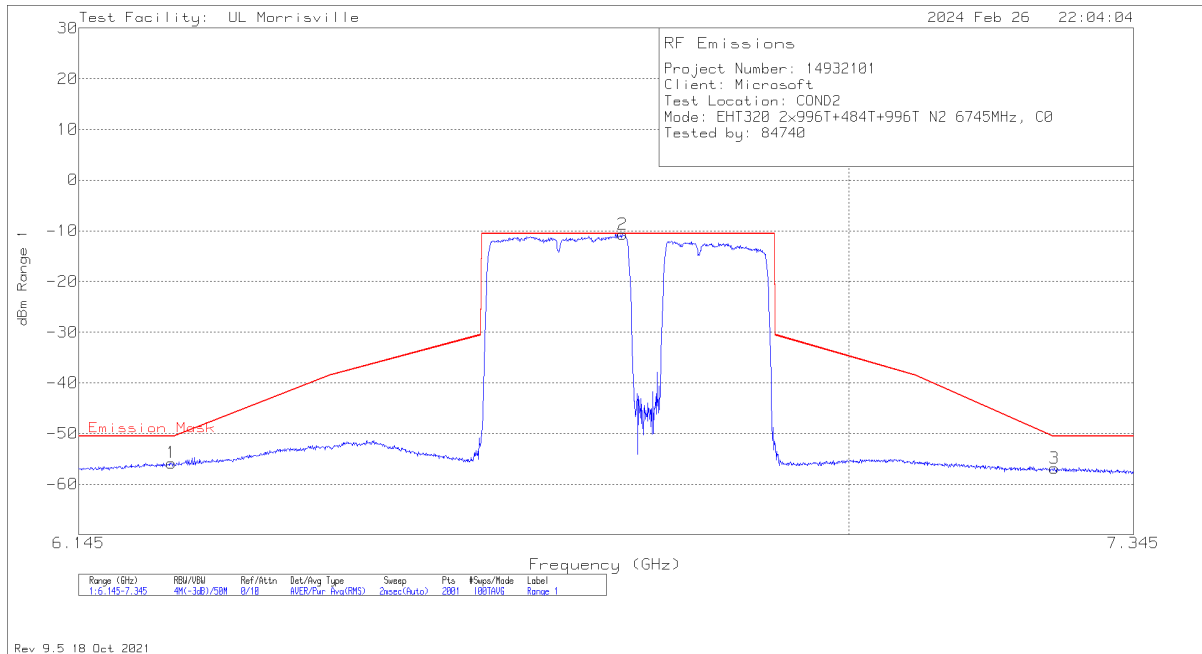


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2422	-69.28	RMS	9.9	3.6	-55.78	-50.57	-5.21
2	6.7372	-24.19	RMS	9.9	3.6	-10.69	-10.57	-.12
3	7.2472	-70.37	RMS	9.9	3.6	-56.87	-50.57	-6.3

RMS - RMS detection

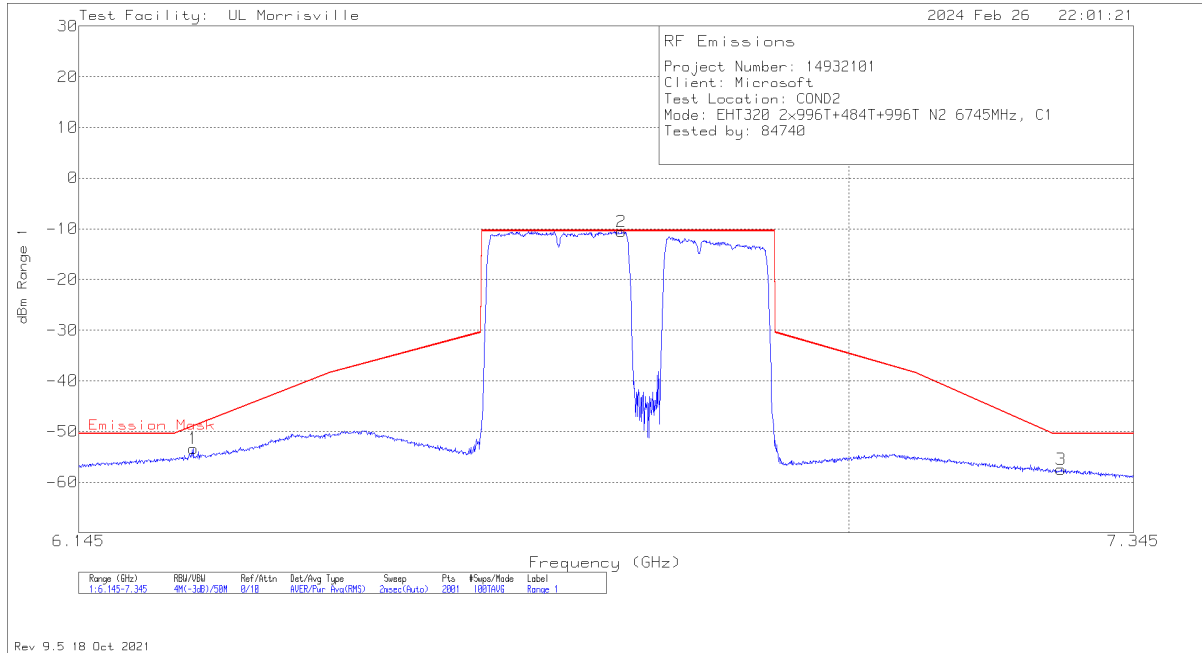


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.265	-66.62	RMS	9.8	3.5	-53.32	-48.96	-4.36
2	6.736	-23.88	RMS	9.8	3.5	-10.58	-10.42	-.16
3	7.2556	-70.7	RMS	9.8	3.5	-57.4	-50.42	-6.98

RMS - RMS detection

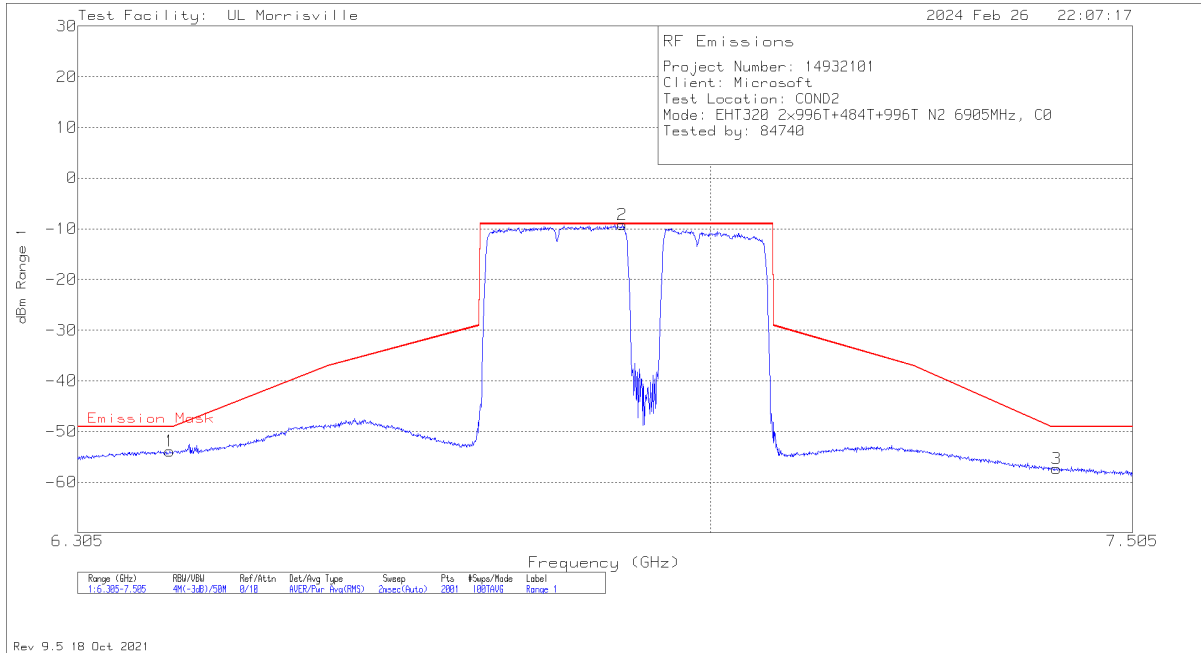

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4016	-67.42	RMS	9.9	3.6	-53.92	-49.08	-4.84
2	6.8984	-22.74	RMS	9.9	3.6	-9.24	-9.08	-1.16
3	7.4114	-70.8	RMS	9.9	3.6	-57.3	-49.08	-8.22


RMS - RMS detection

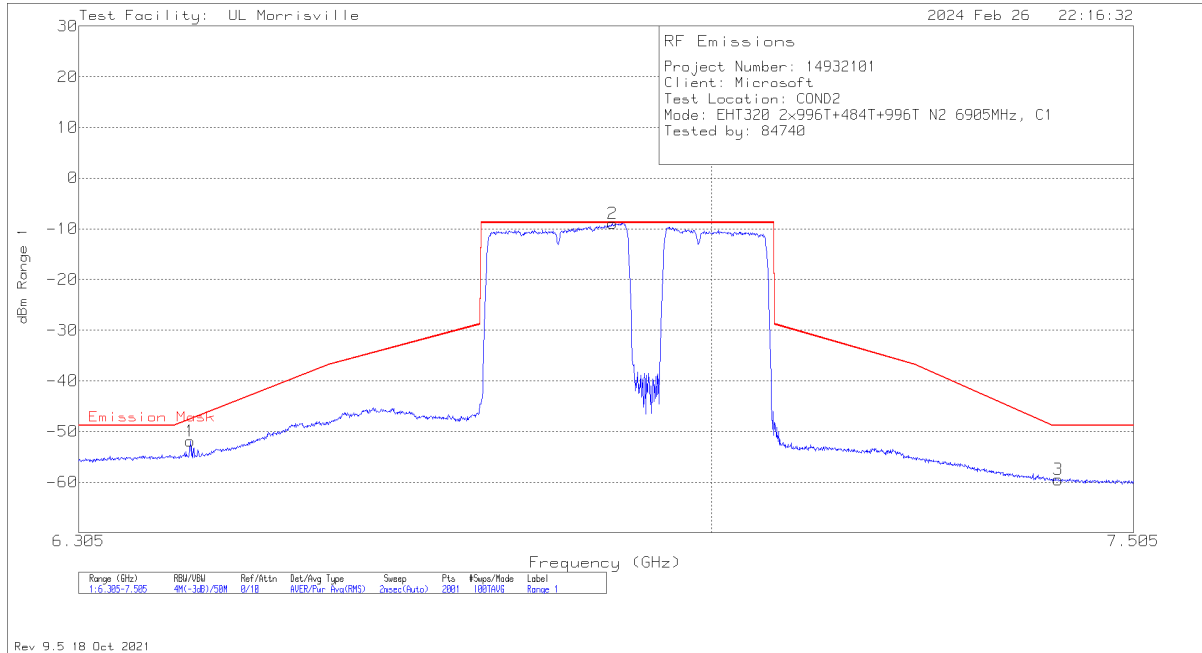

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.422	-65.17	RMS	9.8	3.5	-51.87	-47.57	-4.3
2	6.8864	-22.3	RMS	9.8	3.5	-9	-8.81	-1.19
3	7.4126	-72.79	RMS	9.8	3.5	-59.49	-48.81	-10.68


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T LOW POWER INDOOR

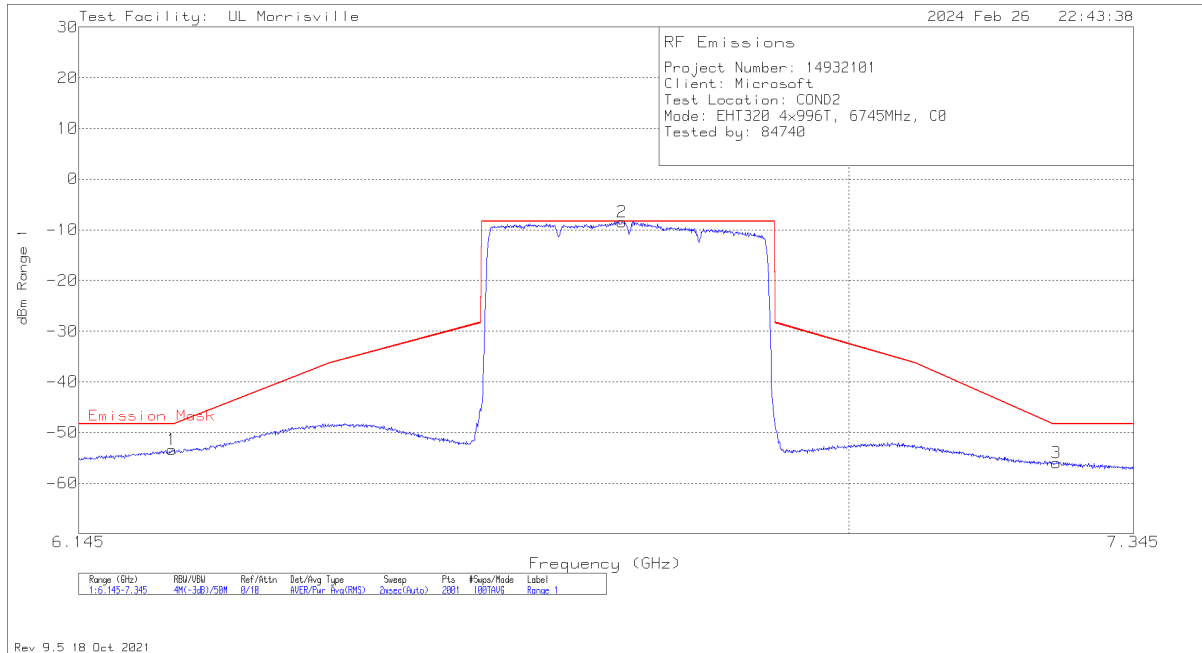


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2428	-66.91	RMS	9.9	3.6	-53.41	-48.35	-5.06
2	6.7366	-21.9	RMS	9.9	3.6	-8.4	-8.35	-.05
3	7.2496	-69.44	RMS	9.9	3.6	-55.94	-48.35	-7.59

RMS - RMS detection

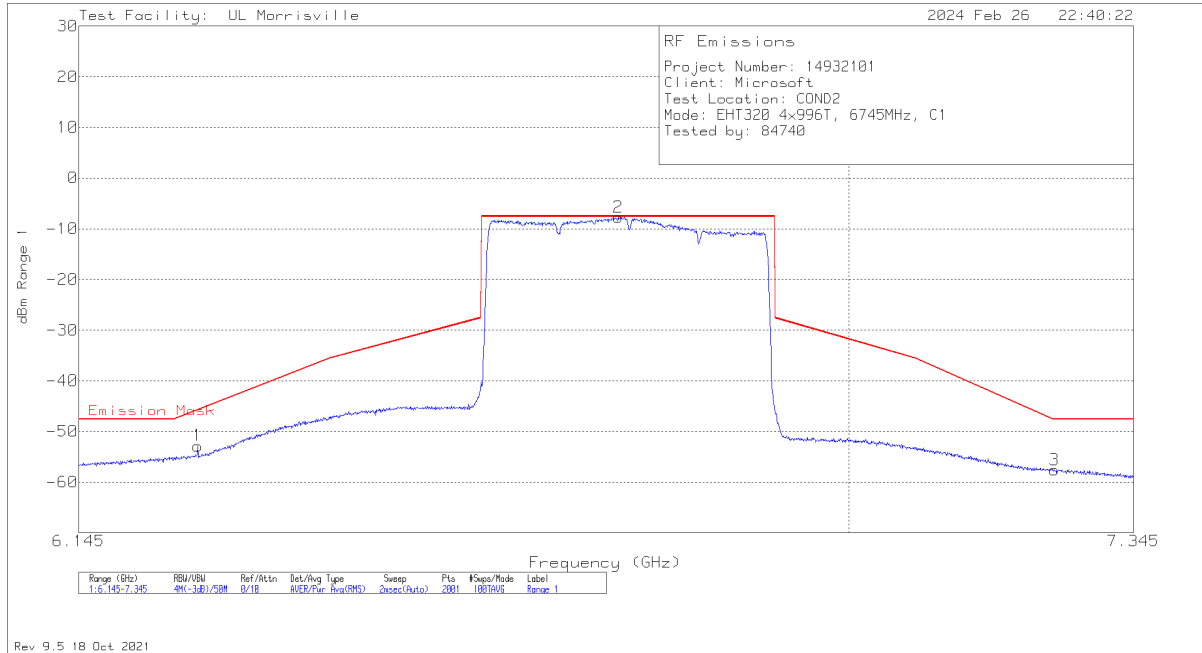


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.2698	-66.11	RMS	9.8	3.5	-52.81	-45.76	-7.05
2	6.7324	-20.97	RMS	9.8	3.5	-7.67	-7.57	-.1
3	7.2478	-70.86	RMS	9.8	3.5	-57.56	-47.57	-9.99

RMS - RMS detection

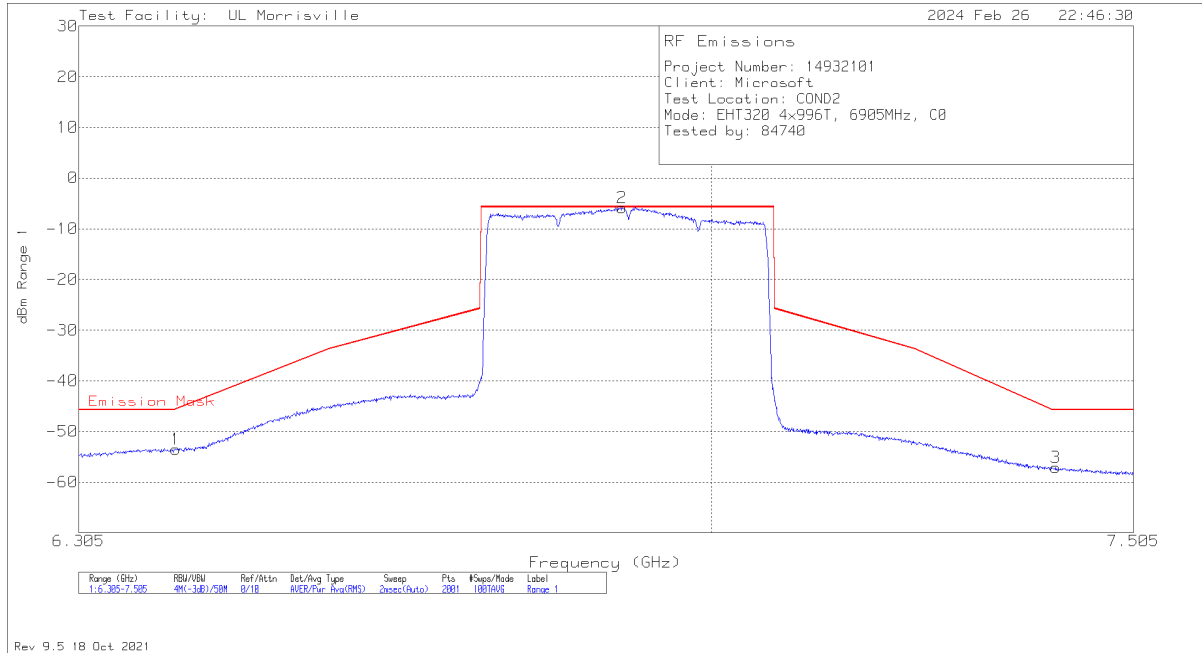

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.407	-66.96	RMS	9.9	3.6	-53.46	-45.58	-7.88
2	6.8972	-19.36	RMS	9.9	3.6	-5.86	-5.73	-.13
3	7.409	-70.62	RMS	9.9	3.6	-57.12	-45.73	-11.39

RMS - RMS detection

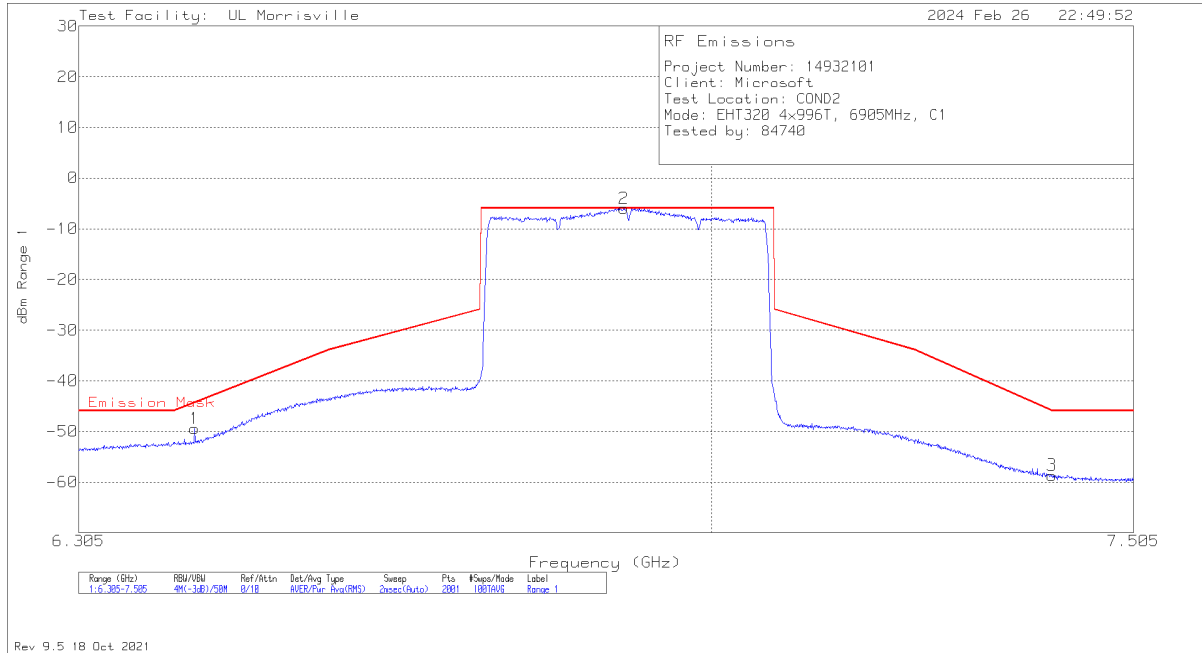

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten (dB)	CBL (dB)	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.4268	-62.75	RMS	9.8	3.5	-49.45	-44.36	-5.09
2	6.899	-19.29	RMS	9.8	3.5	-5.99	-5.95	-.04
3	7.4048	-71.93	RMS	9.8	3.5	-58.63	-45.94	-12.69

RMS - RMS detection

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 Restricted bands
FCC §15.209 and FCC §15.407(b)(6) – Unrestricted bands
RSS-248 4.6.2 (a)
RSS-GEN 8.9, 8.10

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3MHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements. Most cases RMS averaging is used.

When applicable 15.407 (b) (8) may be used:

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

10.1. TRANSMITTER OUTSIDE 5.925-7.125 GHz , 1-18GHz

10.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE UNII-5 BAND

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

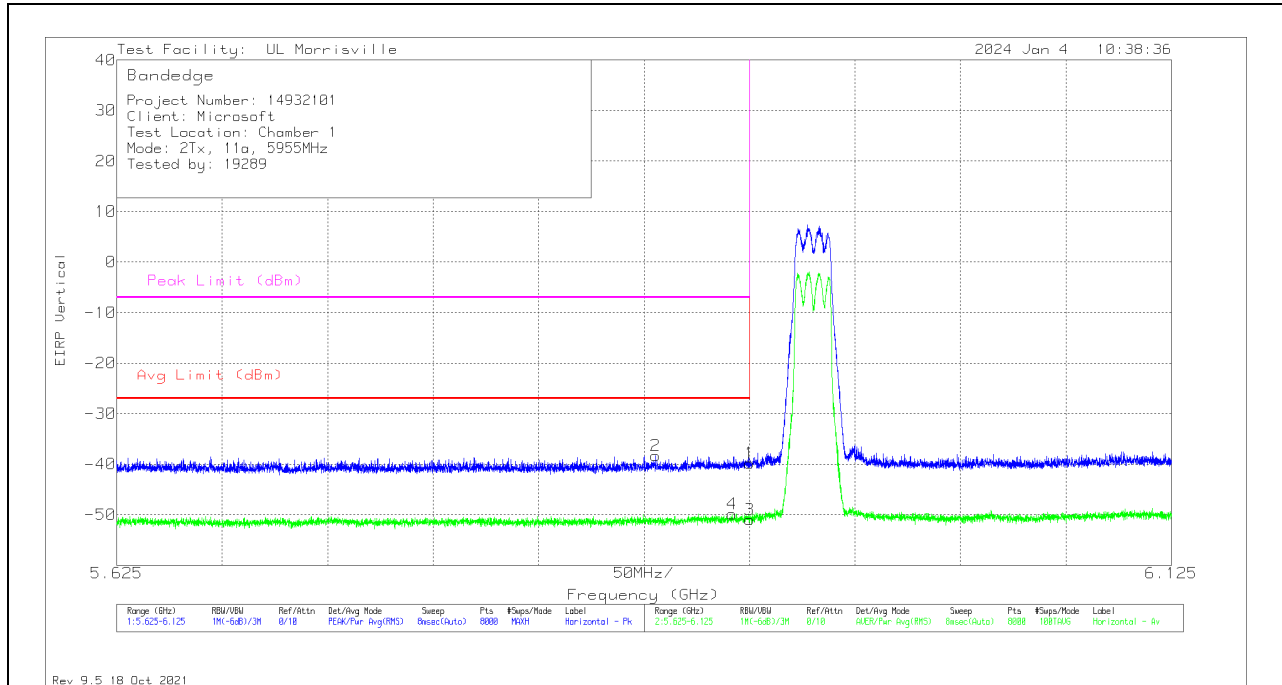

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.88053	-72.32	Pk	34.9	-22.7	11.8	10	-38.32	-27	-11.32	-7	-31.32	15	334	H
4	5.91666	-83.94	RMS	35	-22.7	11.8	10	-49.84	-27	-22.84	-	-	15	334	H
1	5.92498	-74.03	Pk	35	-22.6	11.8	10	-39.83	-27	-12.83	-7	-32.83	15	334	H
3	5.92498	-85.19	RMS	35	-22.6	11.8	10	-50.99	-27	-23.99	-	-	15	334	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

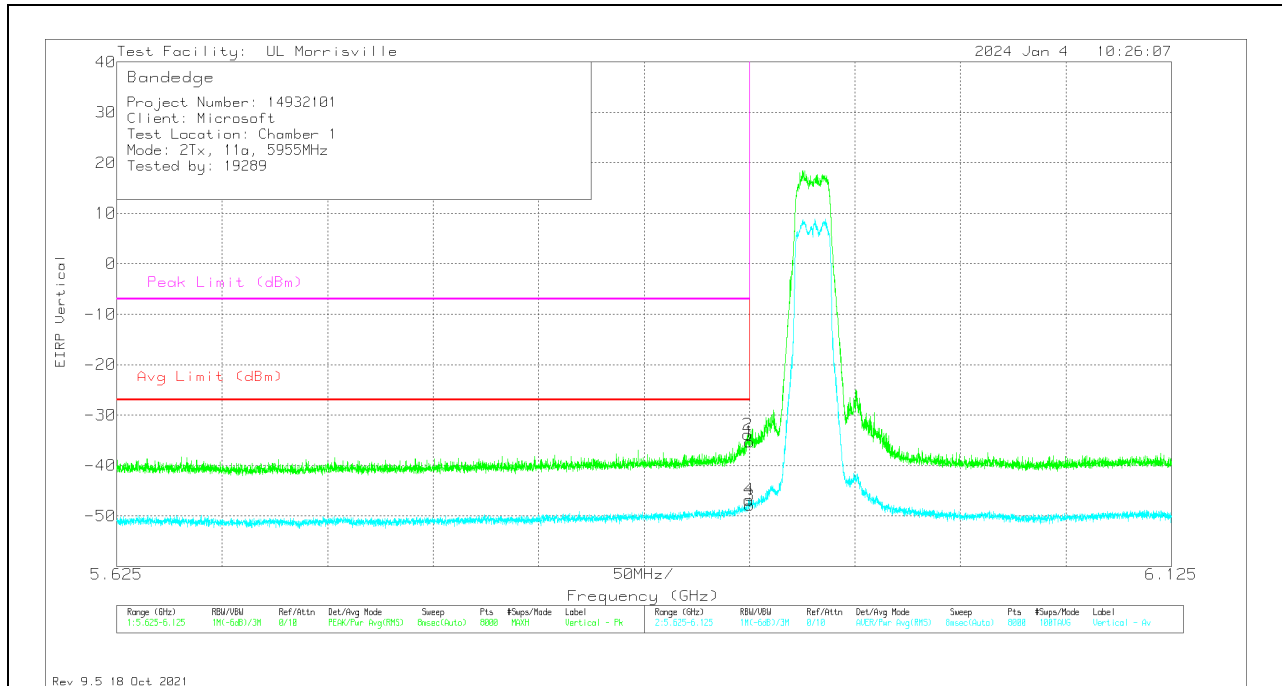

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.92416	-67.99	Pk	35	-22.6	11.8	10	-33.79	-27	-6.79	-7	-26.79	290	247	V
4	5.9246	-81.01	RMS	35	-22.6	11.8	10	-46.81	-27	-19.81	-	-	290	247	V
1	5.92498	-69.51	Pk	35	-22.6	11.8	10	-35.31	-27	-8.31	-7	-28.31	290	247	V
3	5.92498	-82.1	RMS	35	-22.6	11.8	10	-47.9	-27	-20.9	-	-	290	247	V


Pk - Peak detector
 RMS - RMS detection

10.1.2. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE UNII-5 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 26T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

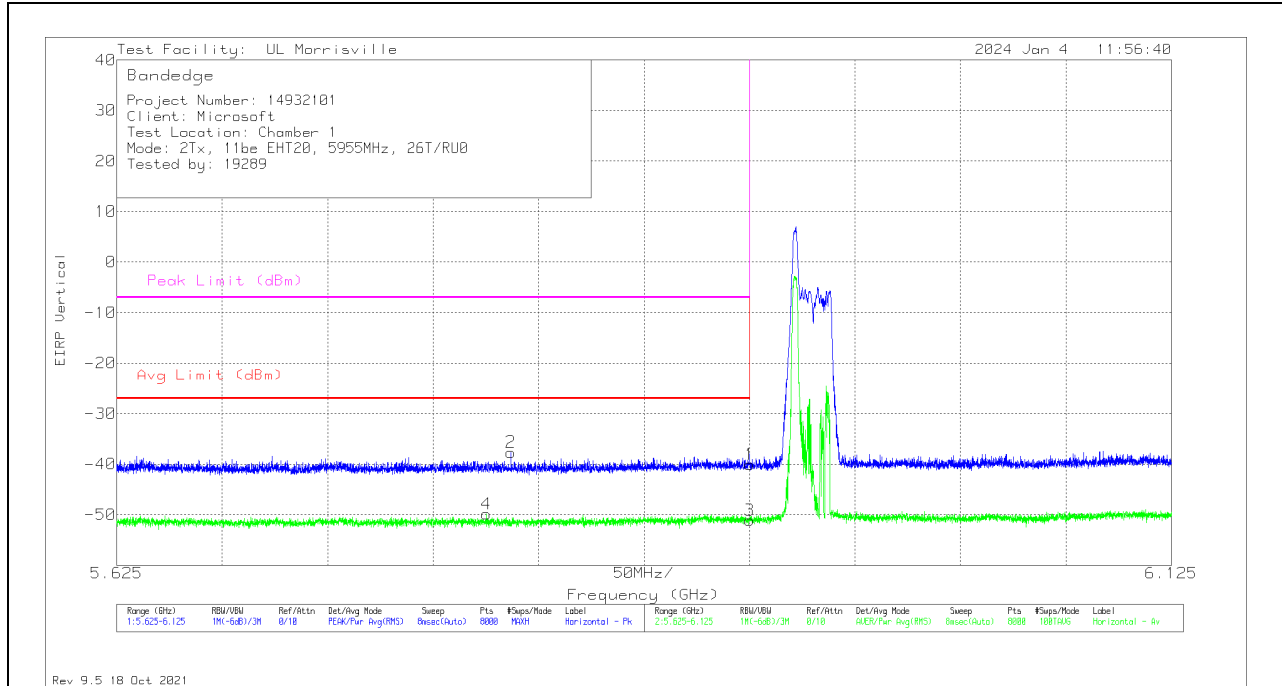

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.80033	-83.41	RMS	34.7	-23	11.8	10	-49.91	-27	-22.91	-	-	356	123	H
2	5.8119	-71.03	Pk	34.7	-23.1	11.8	10	-37.63	-	-	-7	-30.63	356	123	H
1	5.92498	-74.23	Pk	35	-22.6	11.8	10	-40.03	-	-	-7	-33.03	356	123	H
3	5.92498	-85.35	RMS	35	-22.6	11.8	10	-51.15	-27	-24.15	-	-	356	123	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

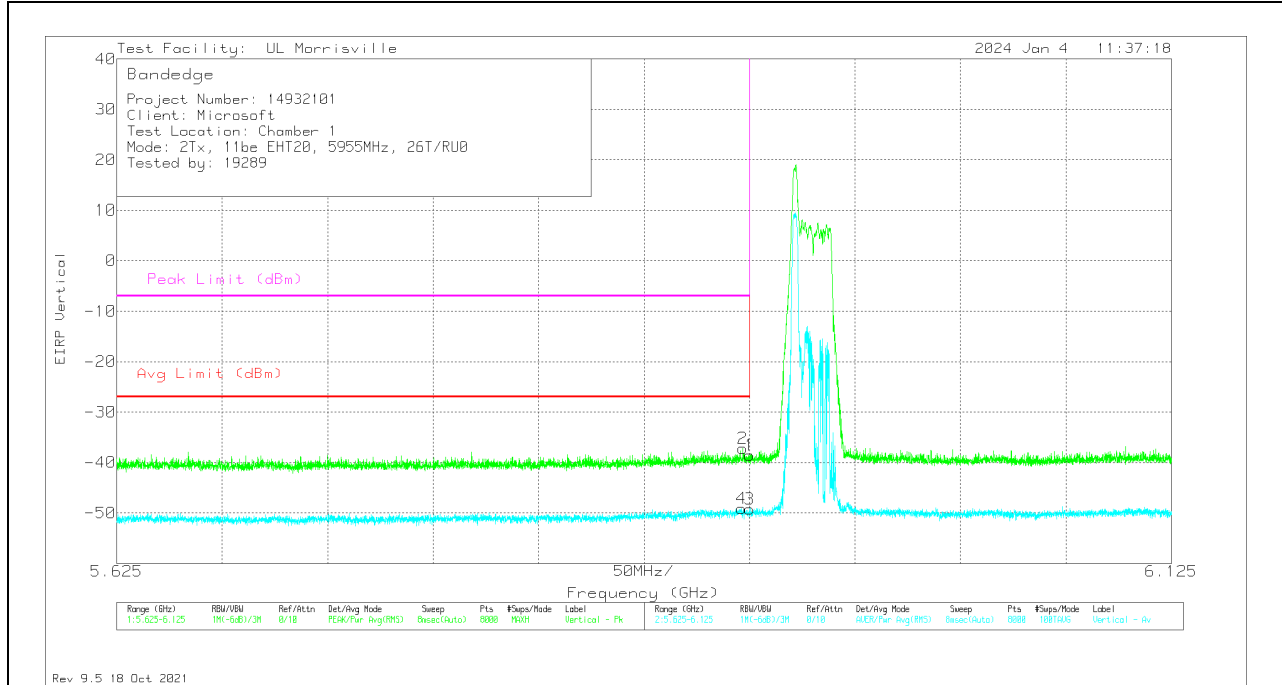


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.92104	-83.3	RMS	35	-22.6	11.8	10	-49.1	-27	-22.1	-	-	304	202	V
2	5.92185	-71.38	Pk	35	-22.6	11.8	10	-37.18	-	-	-7	-30.18	304	202	V
1	5.92498	-72.73	Pk	35	-22.6	11.8	10	-38.53	-	-	-7	-31.53	304	202	V
3	5.92498	-83.44	RMS	35	-22.6	11.8	10	-49.24	-27	-22.24	-	-	304	202	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW

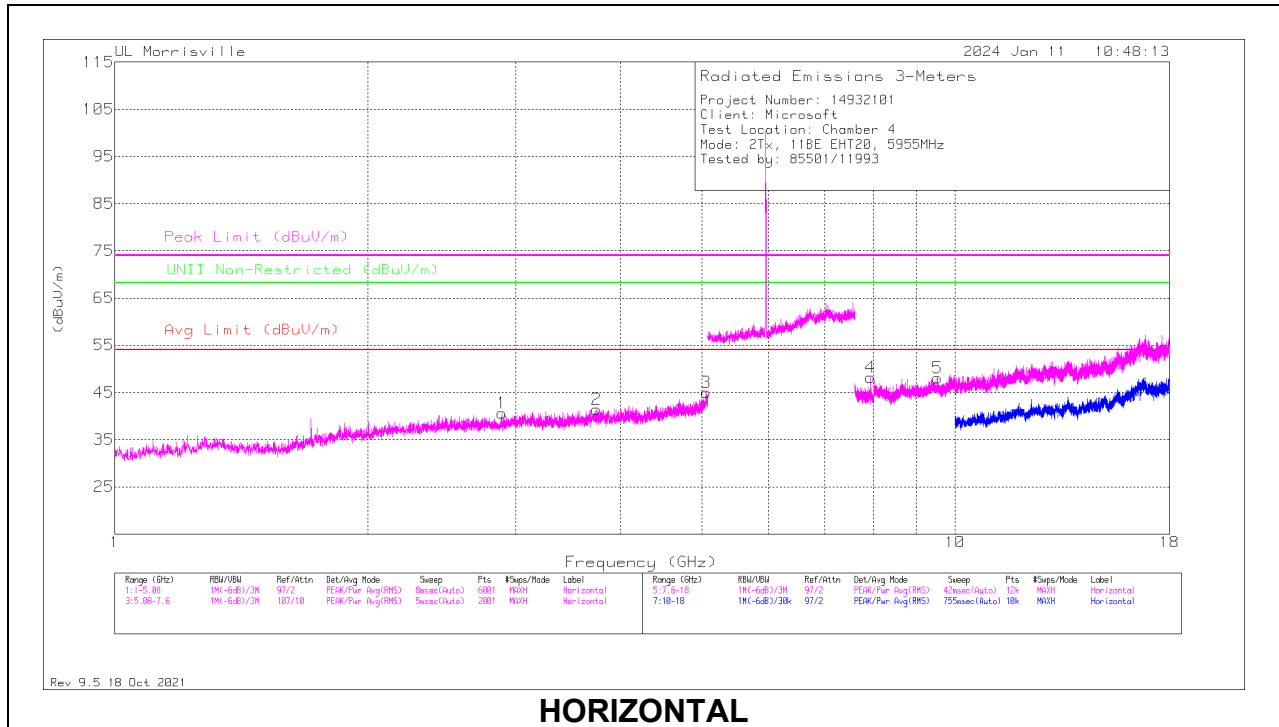

HORIZONTAL

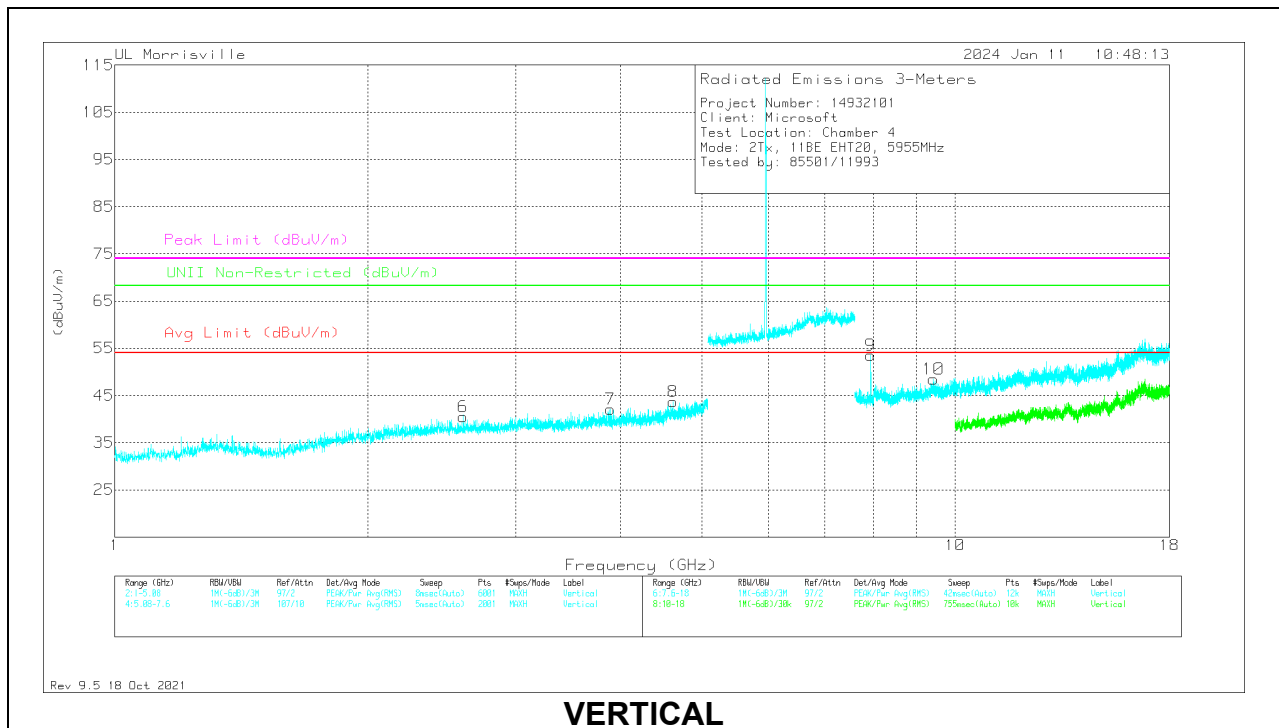

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.88768	43.28	Pk	32.5	-35.2	0	40.58	54	-13.42	74	-33.42	-	-	0-360	100	H
2	*** 3.74448	41.65	Pk	33.1	-33.3	0	41.45	54	-12.55	74	-32.55	-	-	0-360	100	H
3	*** 5.06232	39.65	Pk	34.1	-28.7	0	45.05	54	-8.95	74	-28.95	-	-	0-360	100	H
6	** 2.59936	43.5	Pk	32.6	-35.6	0	40.5	54	-13.5	-	-	68.2	-27.7	0-360	200	V
7	*** 3.88898	41.19	Pk	33.3	-32.4	0	42.09	54	-11.91	74	-31.91	-	-	0-360	200	V
8	*** 4.61556	41.02	Pk	34.1	-31.4	0	43.72	54	-10.28	74	-30.28	-	-	0-360	200	V
10	*** 9.42964	37.18	PK-U	36.7	-26	.4	48.28	-	-	74	-25.72	-	-	94	339	V
	*** 9.42832	25.83	ADR	36.7	-26	.3	36.83	54	-17.17	-	-	-	-	94	339	V
4	7.93973	39.61	Pk	35.8	-28	.8	48.21	-	-	-	-	68.2	-19.99	0-360	100	H
9	7.93973	44.95	Pk	35.8	-28	.8	53.55	-	-	-	-	68.2	-14.65	0-360	200	V
5	9.53007	36.47	Pk	36.7	-25.6	.5	48.07	-	-	-	-	68.2	-20.13	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADR - RMS Average

MID

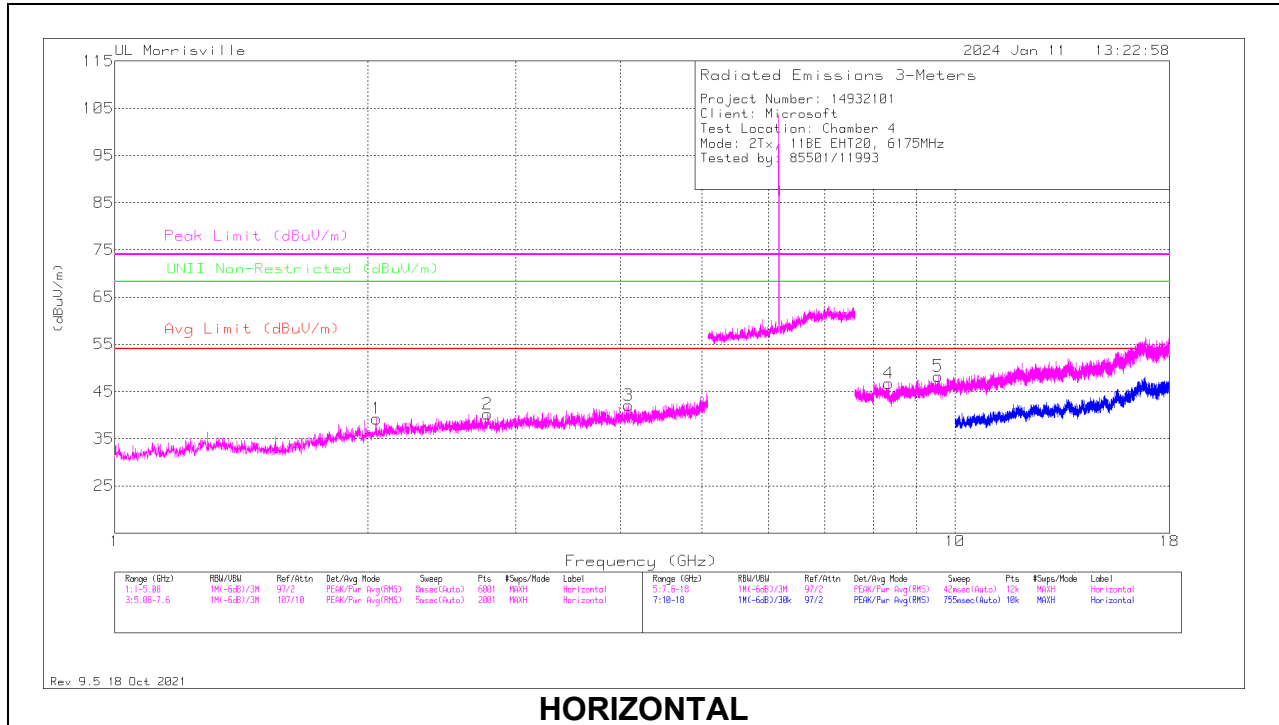

HORIZONTAL

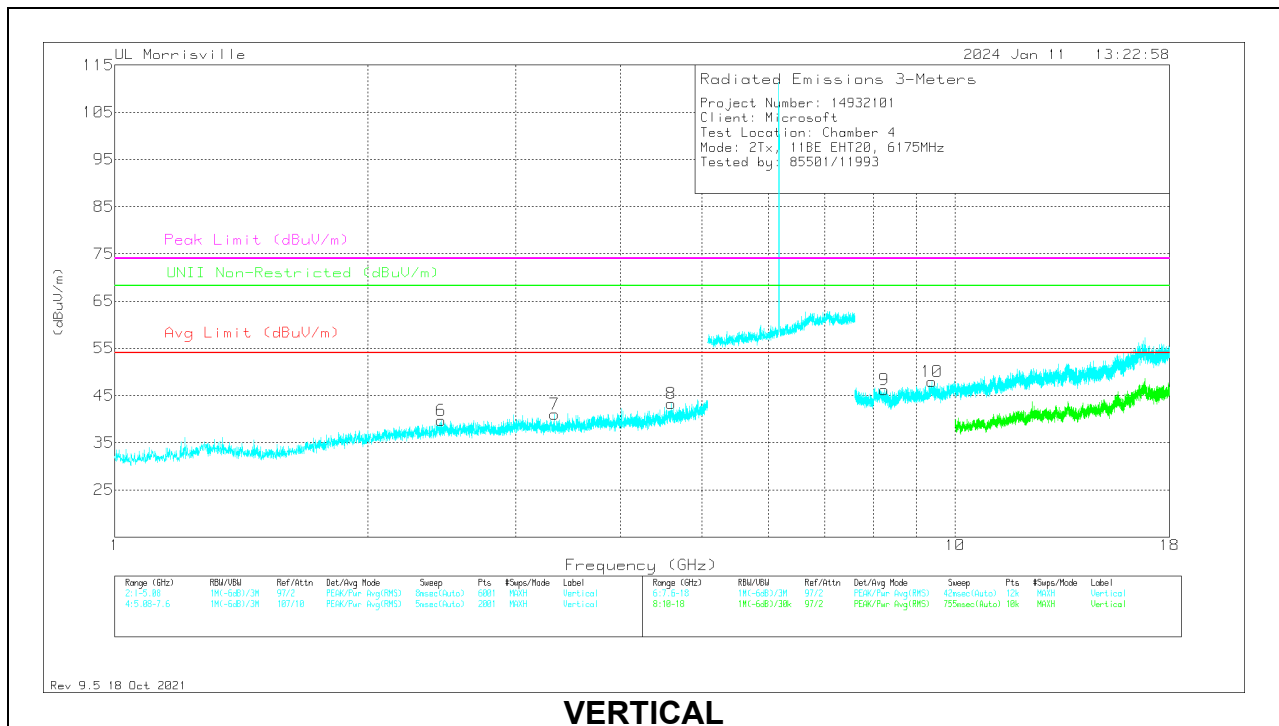

VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 2.77684	43.15	Pk	32.6	-35.5	0	40.25	54	-13.75	74	-33.75	-	-	0-360	100	H
3	*** 4.08652	40.78	Pk	33.4	-32.1	0	42.08	54	-11.92	74	-31.92	-	-	0-360	100	H
7	*** 3.33784	42.96	Pk	32.8	-34.7	0	41.06	54	-12.94	74	-32.94	-	-	0-360	200	V
8	*** 4.59244	40.44	Pk	34.1	-31.3	0	43.24	54	-10.76	74	-30.76	-	-	0-360	200	V
1	2.04924	43.93	Pk	31.3	-36	0	39.23	-	-	-	-	68.2	-28.97	0-360	100	H
6	2.44704	43.17	Pk	32.2	-35.7	0	39.67	-	-	-	-	68.2	-28.53	0-360	200	V
9	*** 8.23267	37.28	Pk	35.8	-27.5	.6	46.18	54	-7.82	74	-27.82	-	-	0-360	200	V
4	*** 8.34273	37.57	Pk	35.8	-27.1	.5	46.77	54	-7.23	74	-27.23	-	-	0-360	100	H
10	*** 9.3862	36.72	Pk	36.6	-25.9	.5	47.92	54	-6.08	74	-26.08	-	-	0-360	200	V
5	9.54827	36.86	Pk	36.7	-25.8	.5	48.26	-	-	-	-	68.2	-19.94	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

HIGH

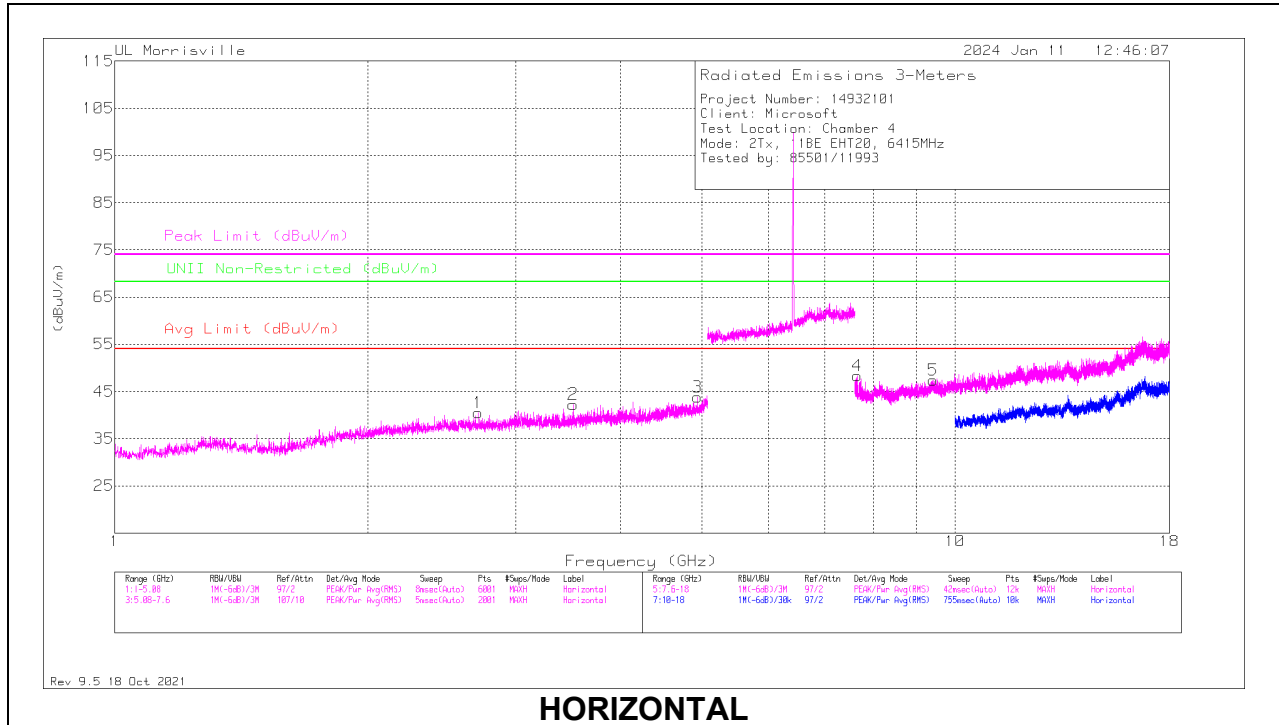

HORIZONTAL

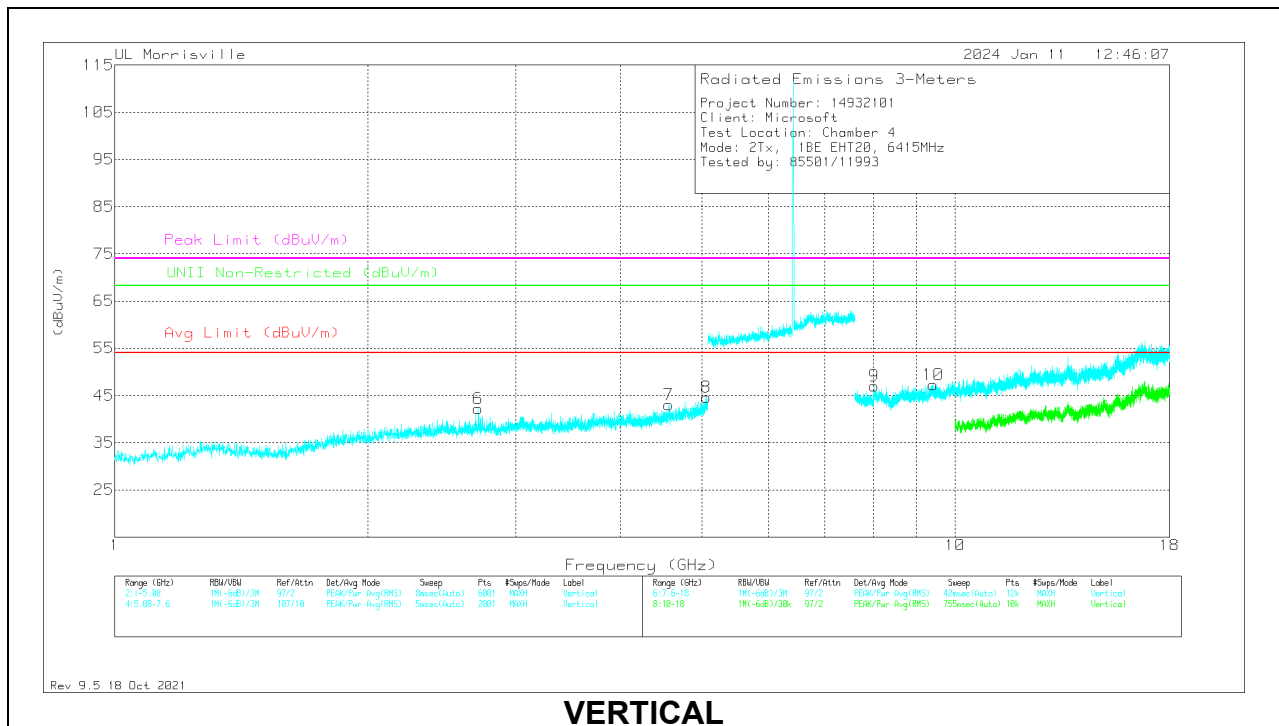

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.7068	43.75	Pk	32.4	-35.7	0	40.45	54	-13.55	74	-33.55	-	-	0-360	100	H
2	*** 3.51192	43.48	Pk	32.9	-34.1	0	42.28	54	-11.72	74	-31.72	-	-	0-360	100	H
3	*** 4.94196	40.23	Pk	33.9	-30.3	0	43.83	54	-10.17	74	-30.17	-	-	0-360	100	H
6	*** 2.70816	45.49	Pk	32.4	-35.7	0	42.19	54	-11.81	74	-31.81	-	-	0-360	200	V
7	*** 4.5666	40.21	Pk	34	-31.2	0	43.01	54	-10.99	74	-30.99	-	-	0-360	200	V
8	*** 5.05484	39.59	Pk	34.1	-29.1	0	44.59	54	-9.41	74	-29.41	-	-	0-360	200	V
4	*** 7.65821	38.35	PK2	35.7	-28.4	1.3	46.95	-	-	74	-27.05	-	-	119	234	H
	*** 7.65711	26.68	ADR	35.7	-28.4	1.3	35.28	54	-18.72	-	-	-	-	119	234	H
10	*** 9.41393	36.27	Pk	36.6	-26	.4	47.27	54	-6.73	74	-26.73	-	-	0-360	300	V
5	*** 9.42	36.46	Pk	36.6	-26.1	.4	47.36	54	-6.64	74	-26.64	-	-	0-360	400	H
9	8.0186	37.93	Pk	35.8	-27.6	.9	47.03	54	-6.97	-	-	68.2	-21.17	0-360	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADR - RMS average

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 52T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

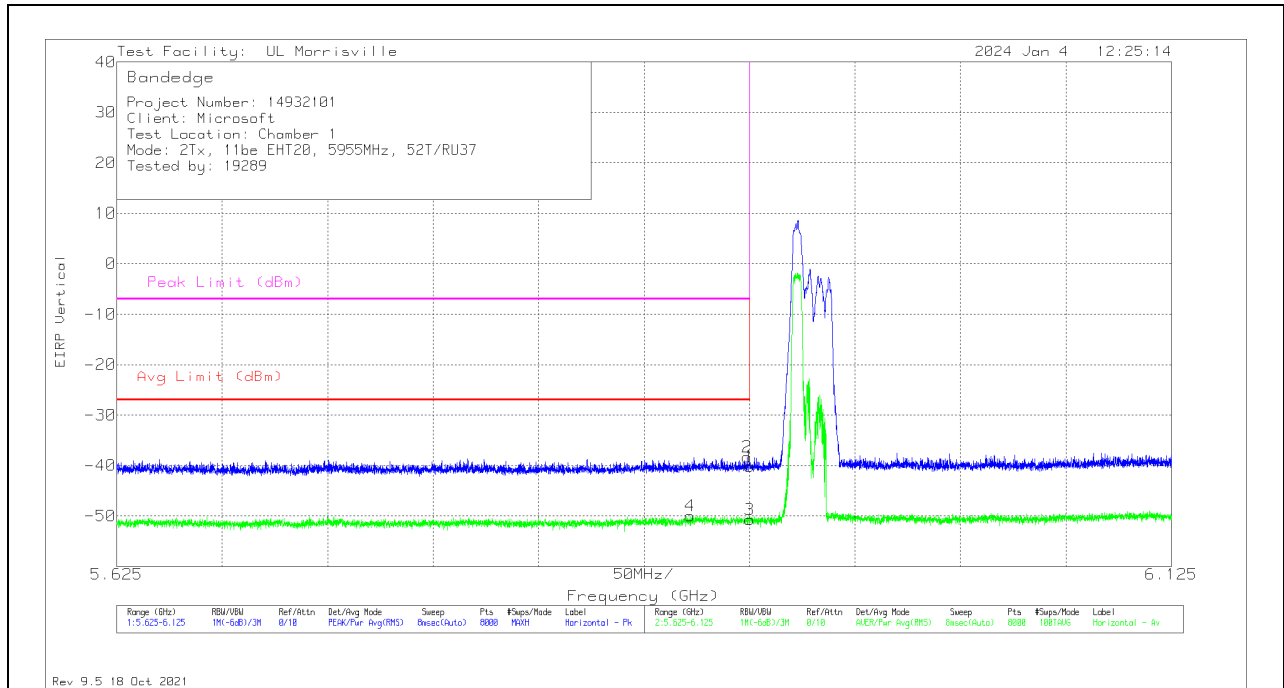

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.89678	-83.97	RMS	34.9	-22.7	11.8	10	-49.97	-27	-22.97	-	-	11	302	H
2	5.92373	-72.46	Pk	35	-22.6	11.8	10	-38.26	-	-	-7	-31.26	11	302	H
1	5.92498	-74.37	Pk	35	-22.6	11.8	10	-40.17	-	-	-7	-33.17	11	302	H
3	5.92498	-84.94	RMS	35	-22.6	11.8	10	-50.74	-27	-23.74	-	-	11	302	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

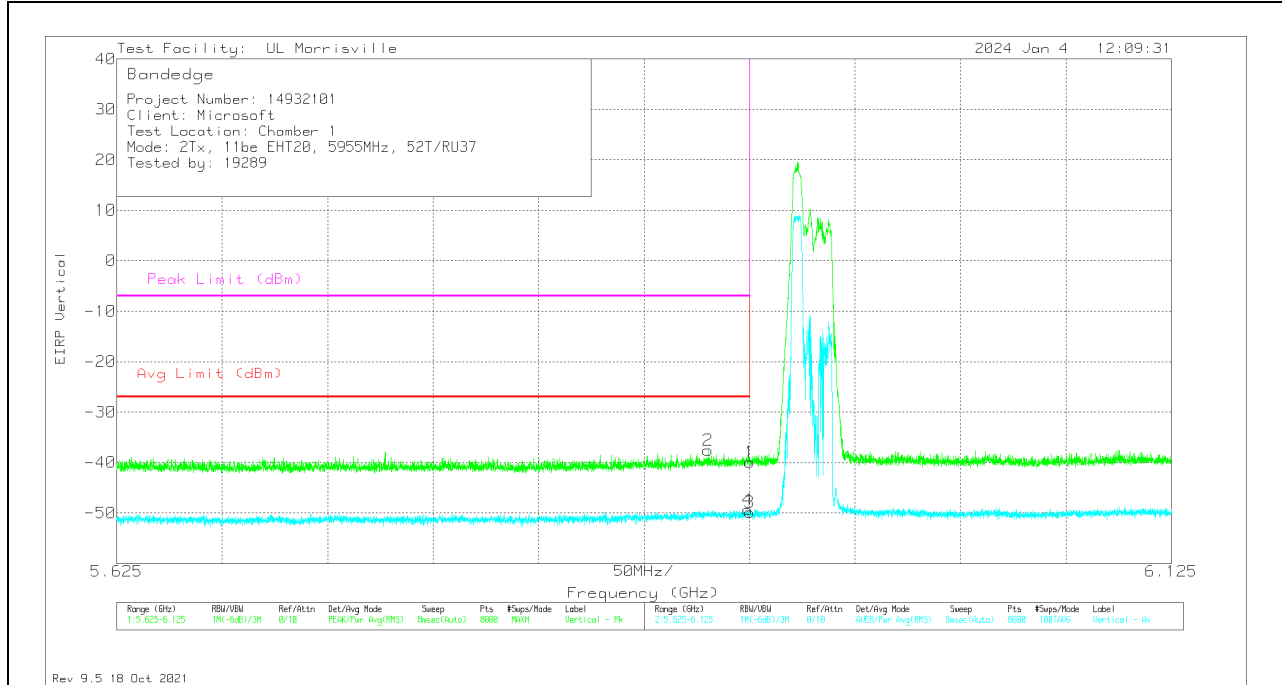


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.90529	-71.75	Pk	35	-22.6	11.8	10	-37.55	-	-	-7	-30.55	331	213	V
4	5.9241	-83.57	RMS	35	-22.6	11.8	10	-49.37	-27	-22.37	-	-	331	213	V
1	5.92498	-74.18	Pk	35	-22.6	11.8	10	-39.98	-	-	-7	-32.98	331	213	V
3	5.92498	-84.02	RMS	35	-22.6	11.8	10	-49.82	-27	-22.82	-	-	331	213	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 52T+26T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

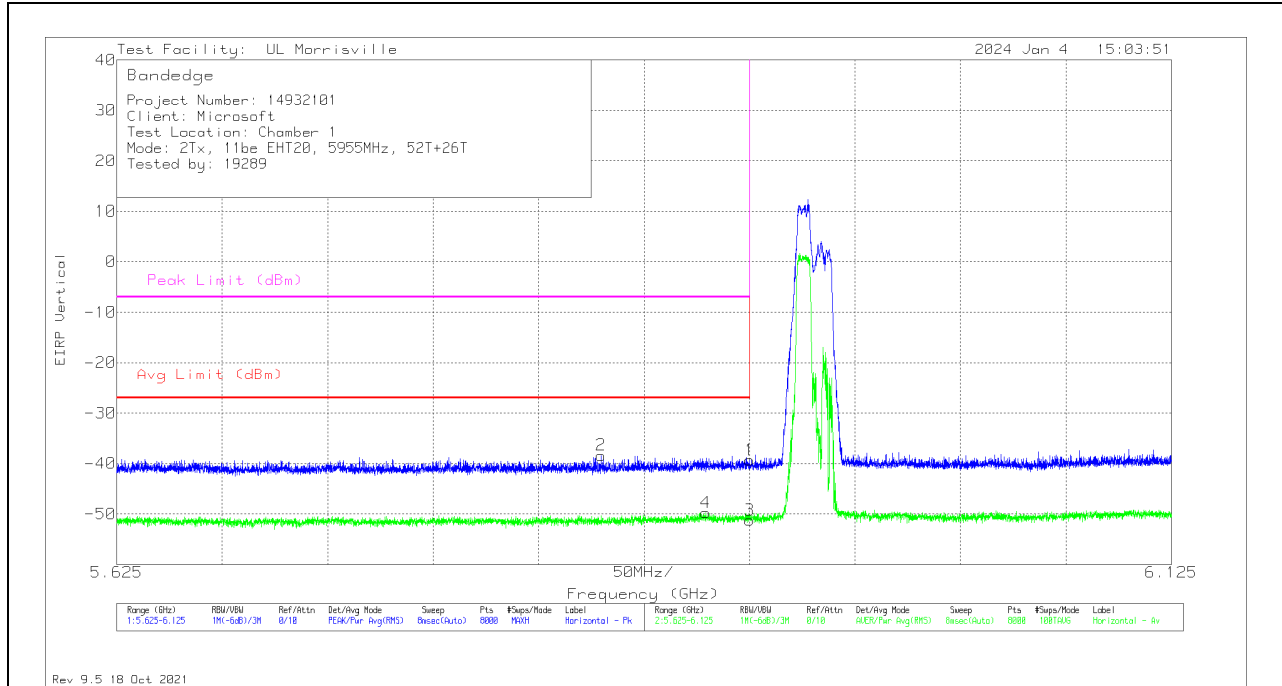

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.85465	-71.97	Pk	34.8	-23	11.8	10	-38.37	-	-	-7	-31.37	260	347	H
4	5.90429	-83.89	RMS	35	-22.6	11.8	10	-49.69	-27	-22.69	-	-	260	347	H
1	5.92498	-73.47	Pk	35	-22.6	11.8	10	-39.27	-	-	-7	-32.27	260	347	H
3	5.92498	-85.44	RMS	35	-22.6	11.8	10	-51.24	-27	-24.24	-	-	260	347	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

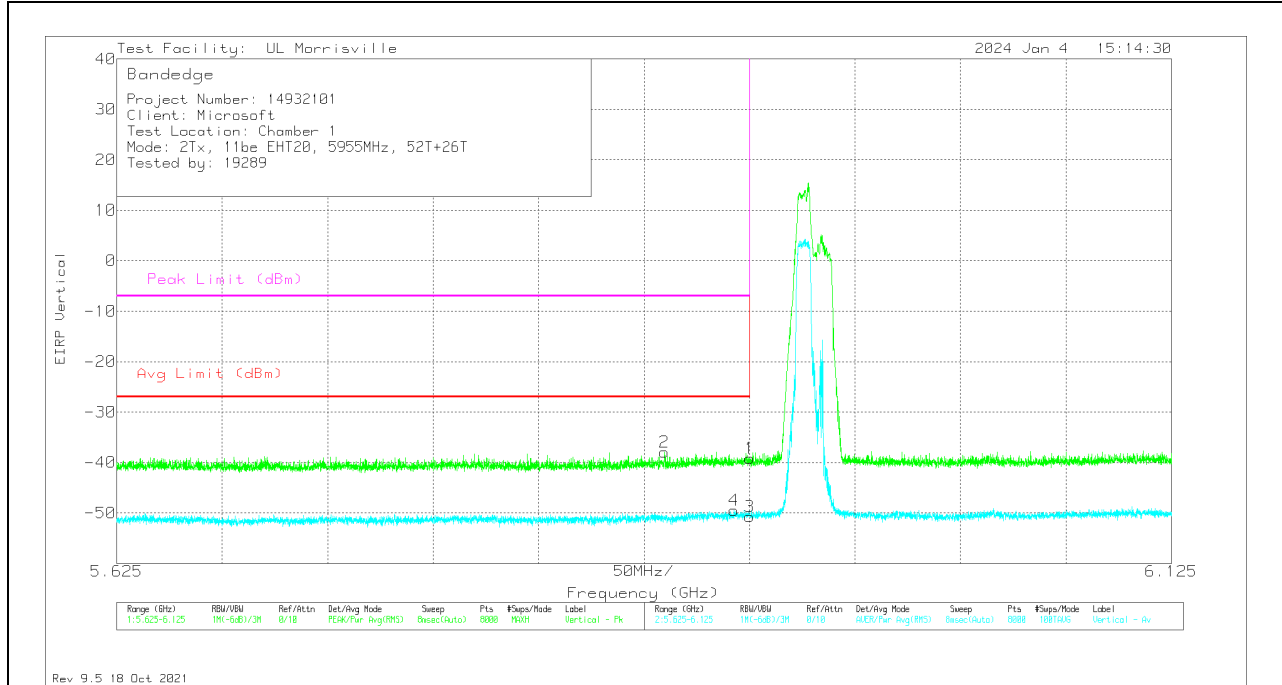


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.88466	-71.8	Pk	34.9	-22.8	11.8	10	-37.9	-	-	-7	-30.9	288	371	V
4	5.91773	-83.65	RMS	35	-22.6	11.8	10	-49.45	-27	-22.45	-	-	288	370	V
1	5.92498	-73.4	Pk	35	-22.6	11.8	10	-39.2	-	-	-7	-32.2	288	371	V
3	5.92498	-84.91	RMS	35	-22.6	11.8	10	-50.71	-27	-23.71	-	-	288	370	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 106T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

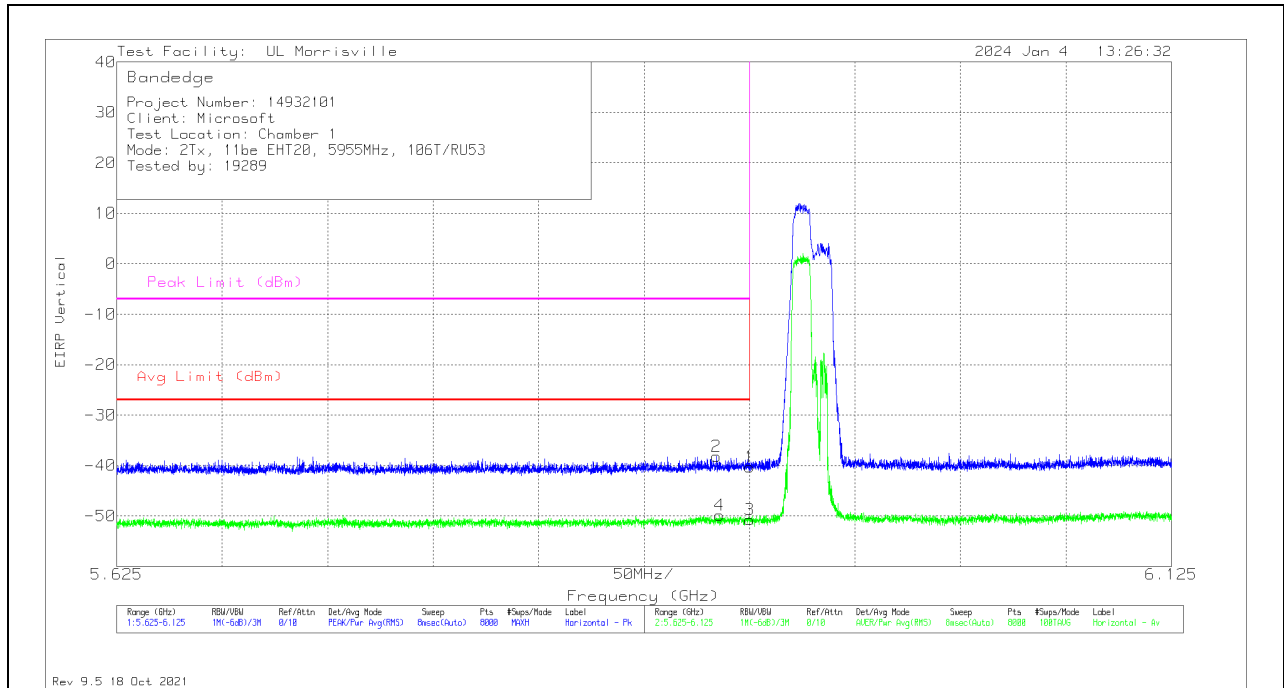

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.90935	-72.36	Pk	35	-22.6	11.8	10	-38.16	-	-	-7	-31.16	218	396	H
4	5.91085	-83.97	RMS	35	-22.7	11.8	10	-49.87	-27	-22.87	-	-	218	396	H
1	5.92498	-74.54	Pk	35	-22.6	11.8	10	-40.34	-	-	-7	-33.34	218	396	H
3	5.92498	-84.92	RMS	35	-22.6	11.8	10	-50.72	-27	-23.72	-	-	218	396	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

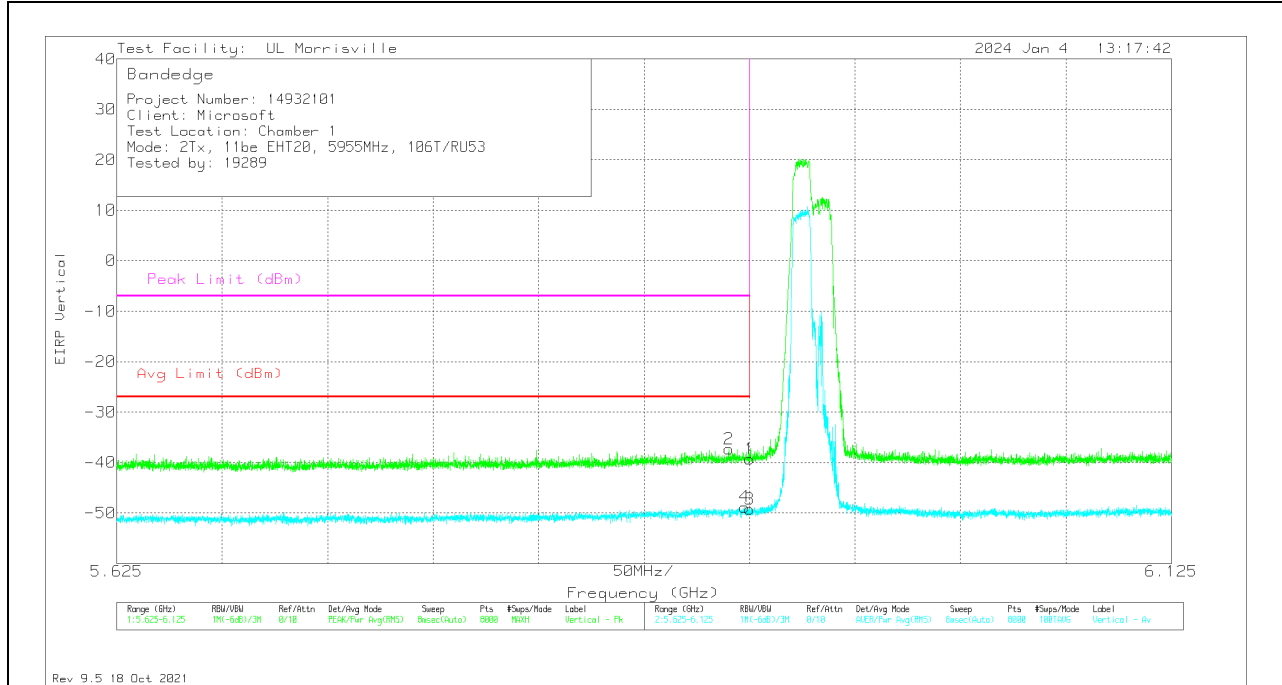


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.9151	-71.45	Pk	35	-22.7	11.8	10	-37.35	-	-	-7	-30.35	311	222	V
4	5.9226	-83	RMS	35	-22.6	11.8	10	-48.8	-27	-21.8	-	-	311	222	V
1	5.92498	-73.46	Pk	35	-22.6	11.8	10	-39.26	-	-	-7	-32.26	311	222	V
3	5.92498	-83.44	RMS	35	-22.6	11.8	10	-49.24	-27	-22.24	-	-	311	222	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 106T+26T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

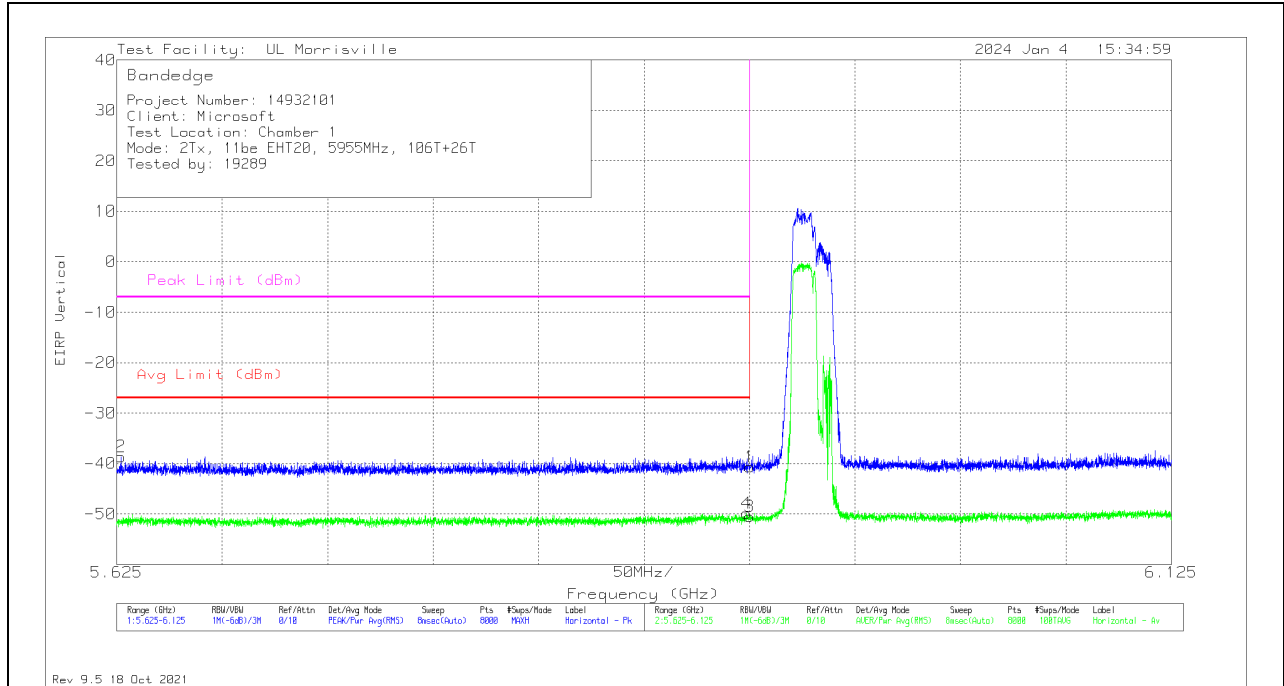

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62694	-71.82	Pk	34.4	-23	11.8	10	-38.62	-	-	-7	-31.62	220	396	H
4	5.92348	-84	RMS	35	-22.6	11.8	10	-49.8	-27	-22.8	-	-	220	396	H
1	5.92498	-74.85	Pk	35	-22.6	11.8	10	-40.65	-	-	-7	-33.65	220	396	H
3	5.92498	-84.67	RMS	35	-22.6	11.8	10	-50.47	-27	-23.47	-	-	220	396	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

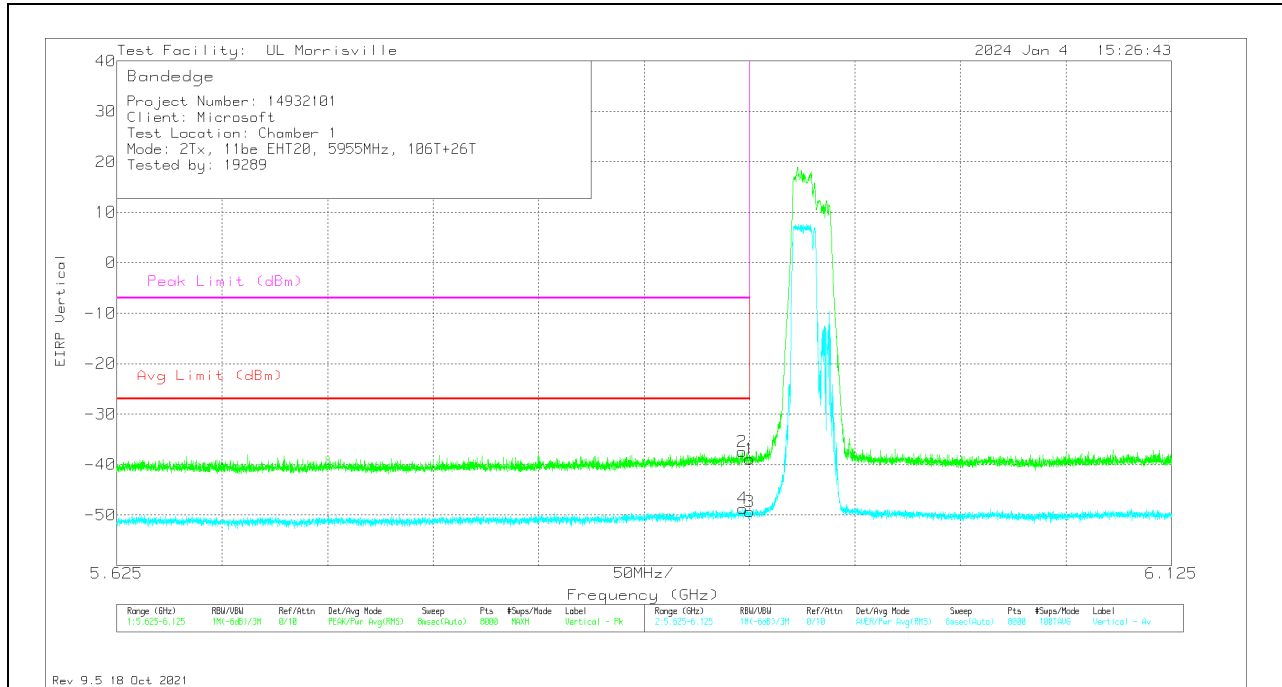


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.9216	-71.62	Pk	35	-22.6	11.8	10	-37.42	-	-	-7	-30.42	305	199	V
4	5.92185	-82.88	RMS	35	-22.6	11.8	10	-48.68	-27	-21.68	-	-	305	199	V
1	5.92498	-73.16	Pk	35	-22.6	11.8	10	-38.96	-	-	-7	-31.96	305	199	V
3	5.92498	-83.57	RMS	35	-22.6	11.8	10	-49.37	-27	-22.37	-	-	305	199	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 242T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

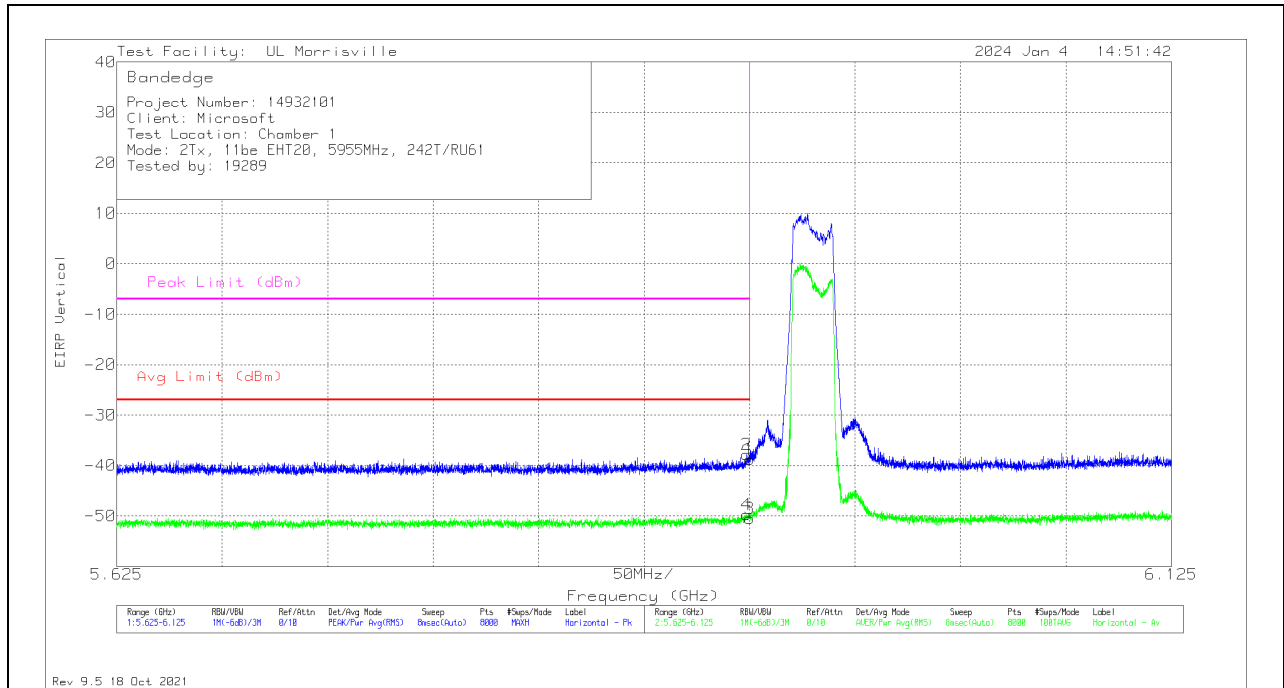

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.92354	-71.97	Pk	35	-22.6	11.8	10	-37.77	-	-	-7	-30.77	11	336	H
4	5.92354	-83.93	RMS	35	-22.6	11.8	10	-49.73	-27	-22.73	-	-	11	335	H
1	5.92498	-73.05	Pk	35	-22.6	11.8	10	-38.85	-	-	-7	-31.85	11	336	H
3	5.92498	-84.73	RMS	35	-22.6	11.8	10	-50.53	-27	-23.53	-	-	11	335	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

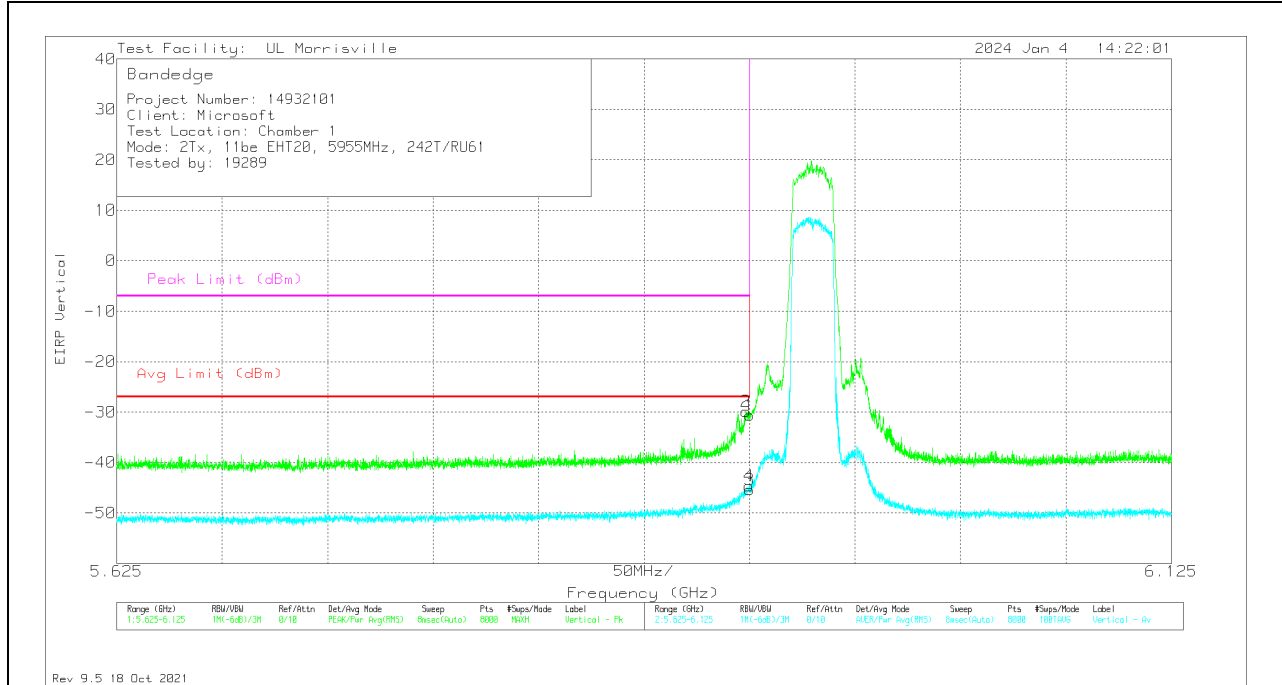


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.92329	-64.05	Pk	35	-22.6	11.8	10	-29.85	-	-	-7	-22.85	293	251	V
4	5.92479	-78.83	RMS	35	-22.6	11.8	10	-44.63	-27	-17.63	-	-	293	251	V
1	5.92498	-64.8	Pk	35	-22.6	11.8	10	-30.6	-	-	-7	-23.6	293	251	V
3	5.92498	-79.62	RMS	35	-22.6	11.8	10	-45.42	-27	-18.42	-	-	293	251	V

Pk - Peak detector
 RMS - RMS detection

10.1.3. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE UNII-5 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

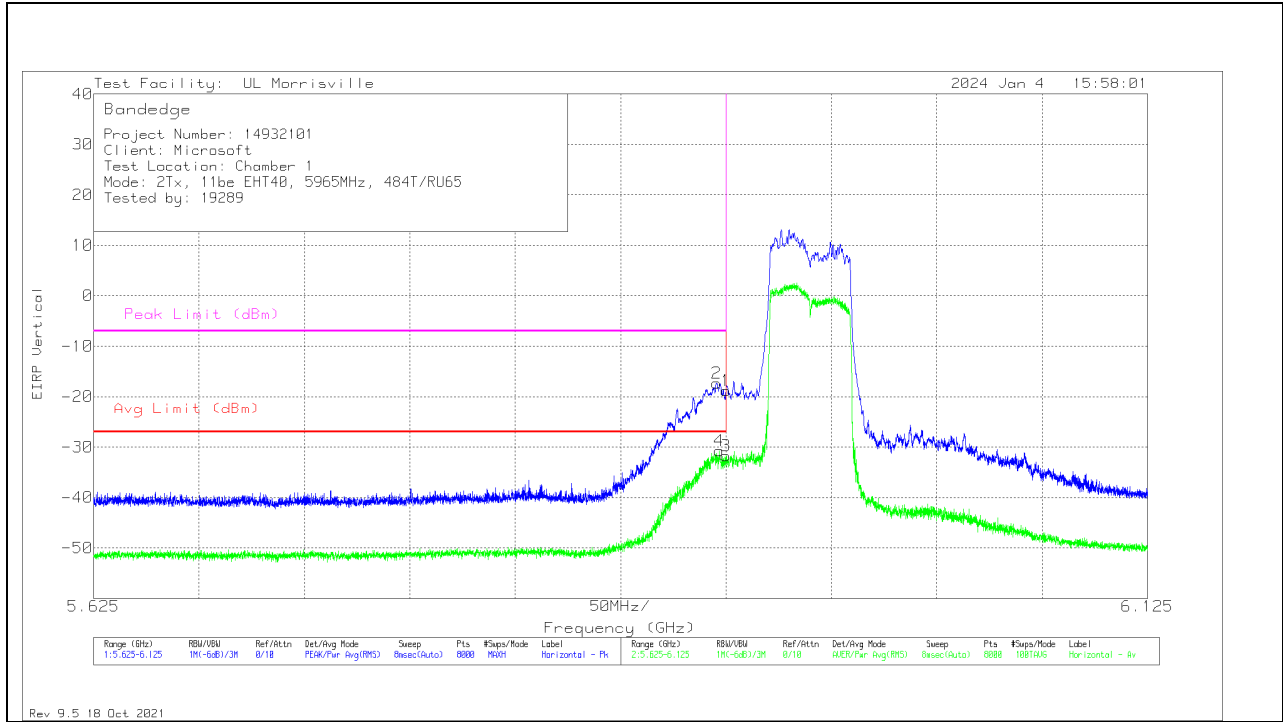

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.92054	-51.47	Pk	35	-22.6	11.8	10	-17.27	-	-	-7	-10.27	250	390	H
4	5.92185	-64.95	RMS	35	-22.6	11.8	10	-30.75	-27	-3.75	-	-	250	390	H
1	5.92498	-52.98	Pk	35	-22.6	11.8	10	-18.78	-	-	-7	-11.78	250	390	H
3	5.92498	-65.89	RMS	35	-22.6	11.8	10	-31.69	-27	-4.69	-	-	250	390	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

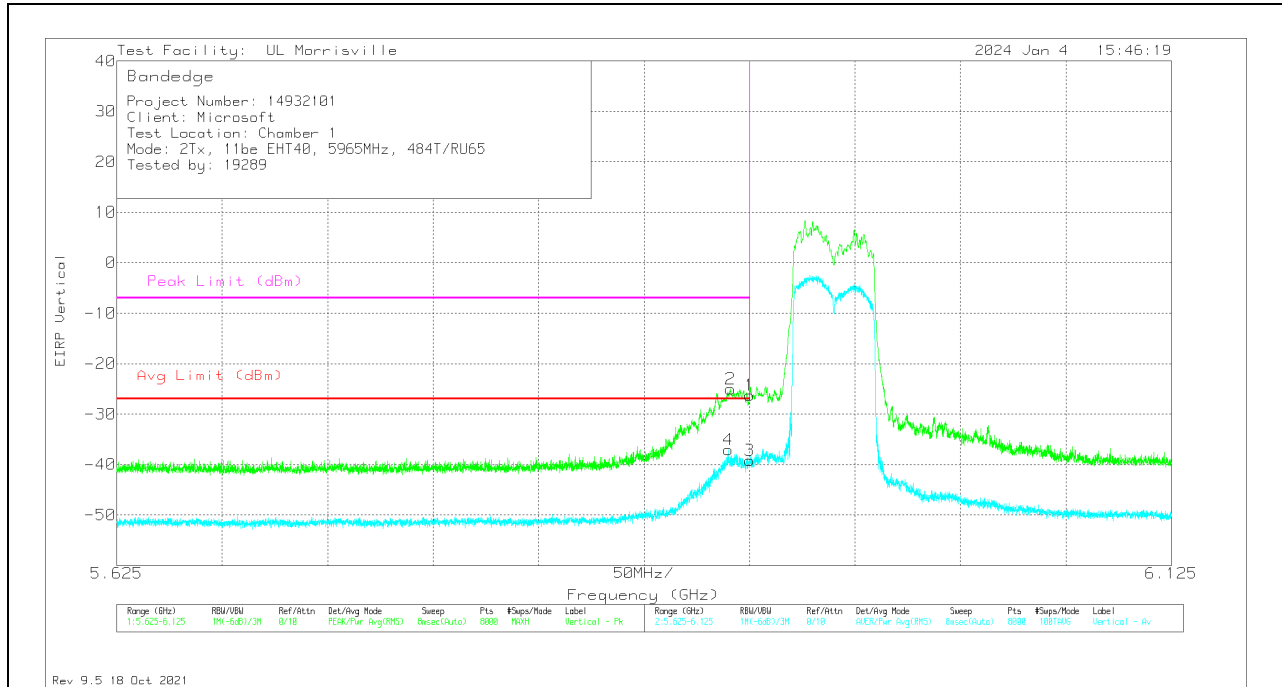

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.91497	-71.16	RMS	35	-22.7	11.8	10	-37.06	-27	-10.06	-	-	256	391	V
2	5.91597	-59.1	Pk	35	-22.7	11.8	10	-25	-	-	-7	-18	256	391	V
1	5.92498	-60.46	Pk	35	-22.6	11.8	10	-26.26	-	-	-7	-19.26	256	391	V
3	5.92498	-73.41	RMS	35	-22.6	11.8	10	-39.21	-27	-12.21	-	-	256	391	V


Pk - Peak detector
 RMS - RMS detection

10.1.4. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE UNII-5 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+242T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

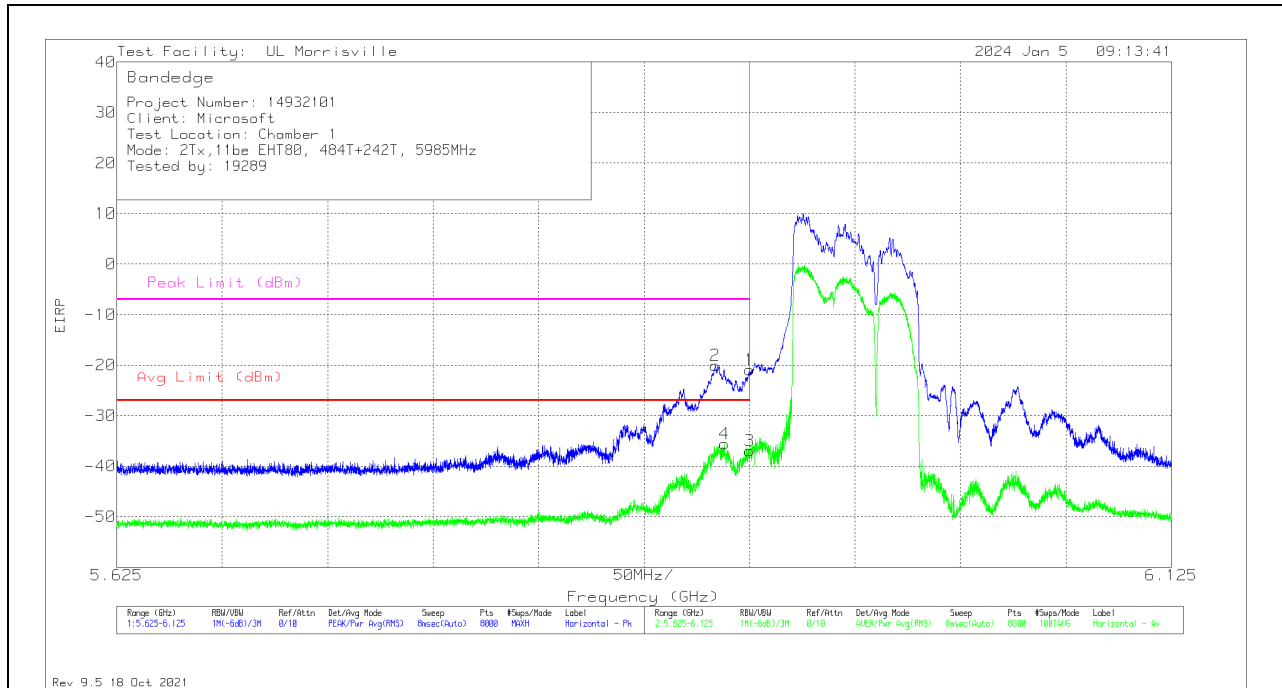

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.90866	-54.24	Pk	35	-22.6	11.8	10	0	-20.04	-	-	-7	-13.04	29	381	H
4	5.91304	-69.64	RMS	35	-22.7	11.8	10	.1	-35.44	-27	-8.44	-	-	29	381	H
1	5.92498	-55.15	Pk	35	-22.6	11.8	10	0	-20.95	-	-	-7	-13.95	29	381	H
3	5.92498	-71.18	RMS	35	-22.6	11.8	10	.1	-36.88	-27	-9.88	-	-	29	381	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

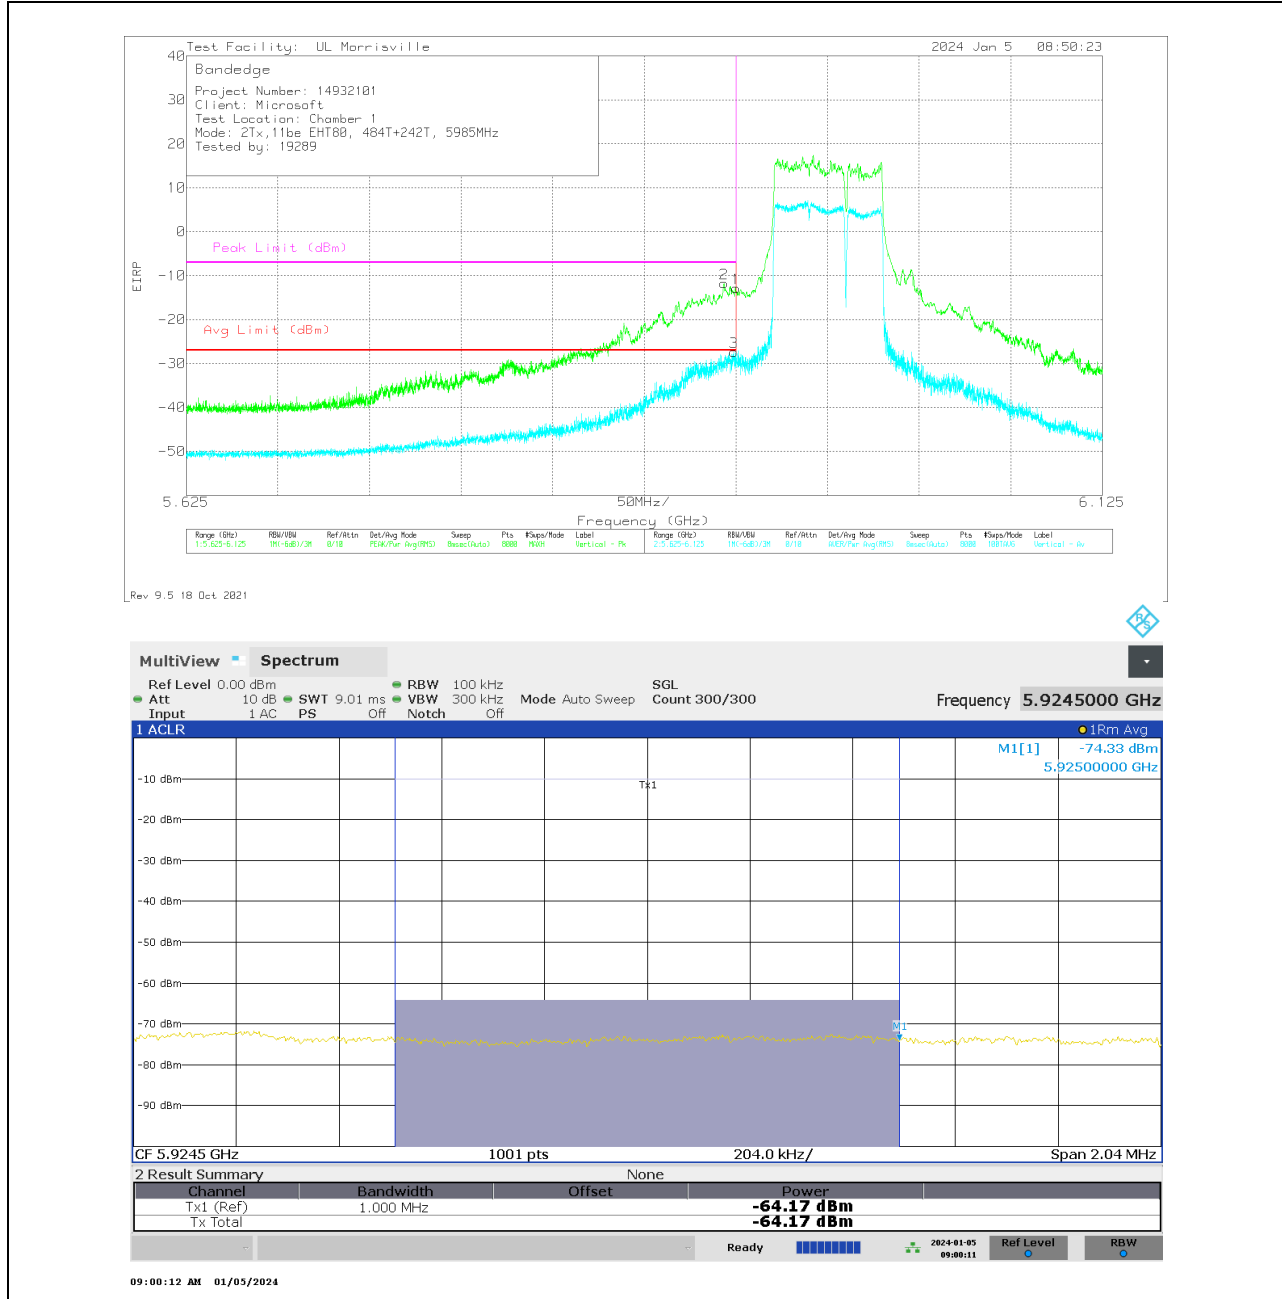


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.91854	-45.98	Pk	35	-22.6	11.8	10	0	-11.78	-	-	-7	-4.78	309	228	V
3	5.92398	-64.17	RMS	35	-22.6	11.8	10	.1	-29.87	-27	-2.87	-	-	309	228	V
1	5.92498	-47.09	Pk	35	-22.6	11.8	10	0	-12.89	-	-	-7	-5.89	309	228	V


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW

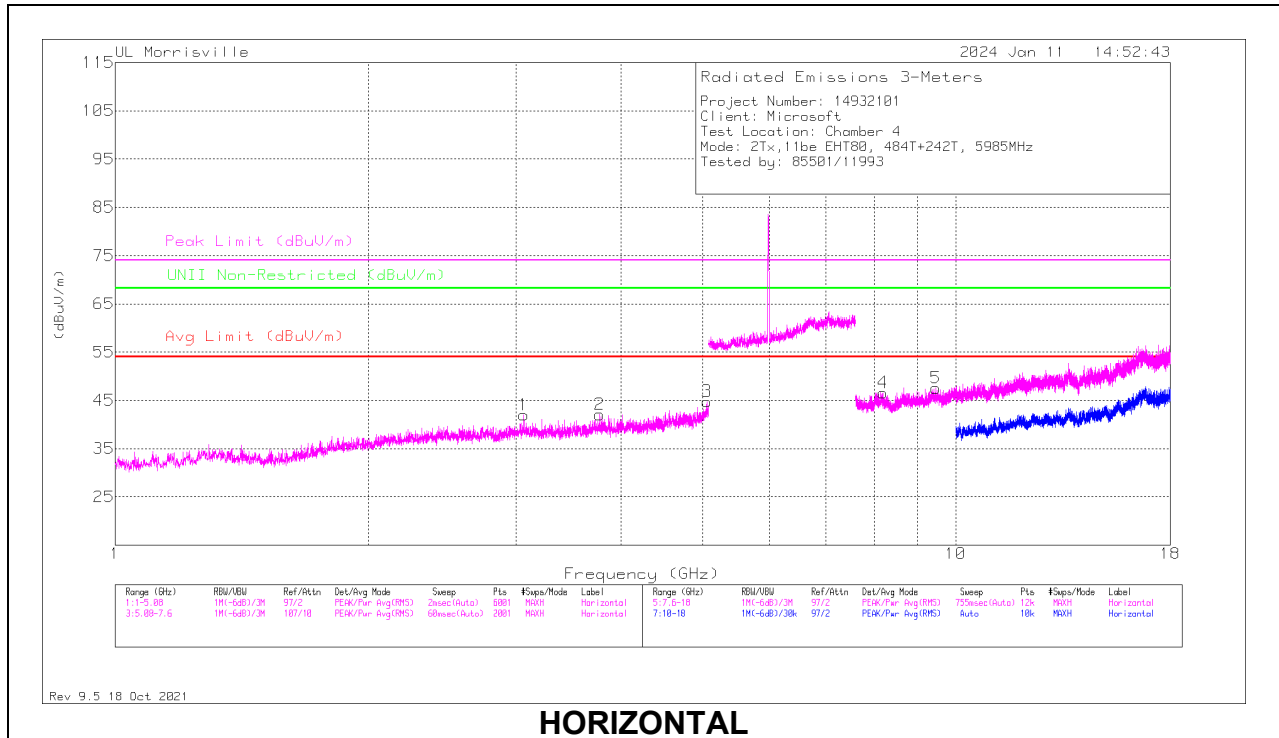

HORIZONTAL

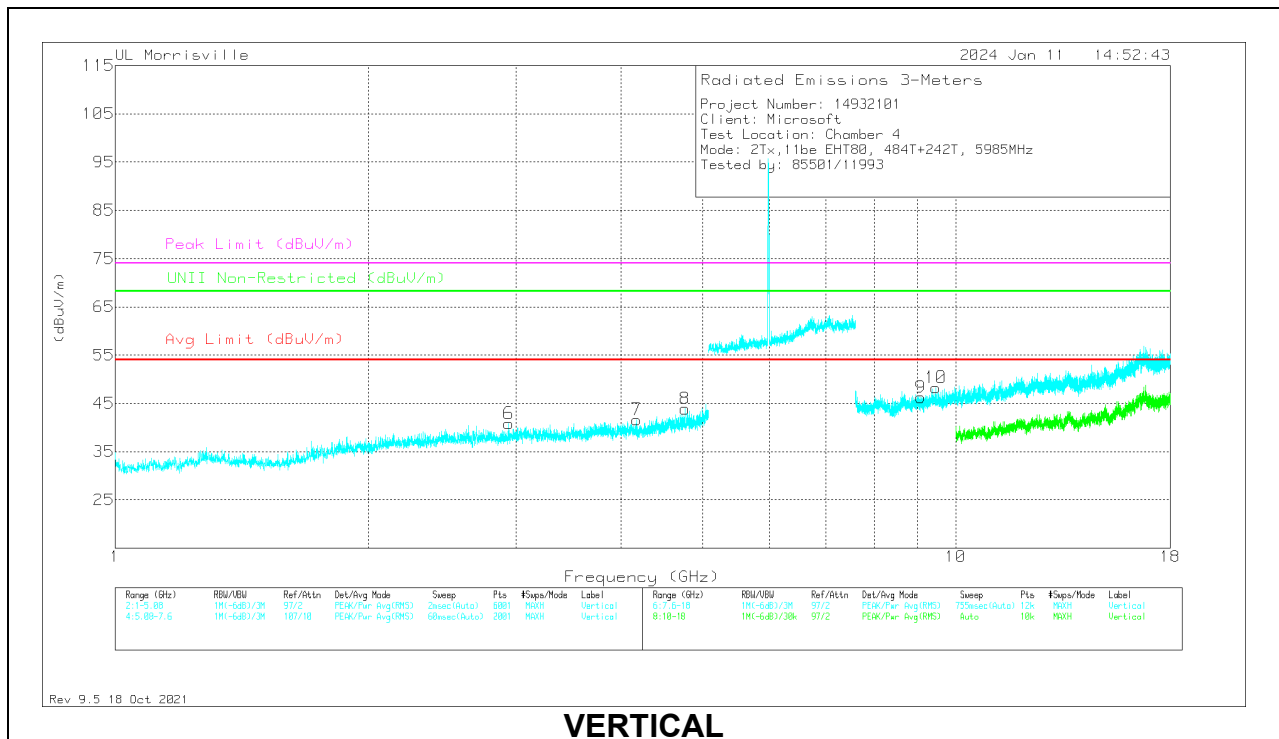

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 3.7676	42.07	Pk	33.2	-33.2	0	42.07	54	-11.93	74	-31.93	-	-	0-360	100	H
3	*** 5.05892	39.66	Pk	34.1	-29	0	44.76	54	-9.24	74	-29.24	-	-	0-360	100	H
7	*** 4.1722	40.2	Pk	33.5	-32.1	0	41.6	54	-12.4	74	-32.4	-	-	0-360	200	V
8	*** 4.76176	40.69	Pk	34	-30.8	0	43.89	54	-10.11	74	-30.11	-	-	0-360	200	V
6	2.93936	43.32	Pk	32.8	-35.3	0	40.82	54	-13.18	-	-	68.2	-27.38	0-360	200	V
1	3.06312	43.97	Pk	33.1	-35.1	0	41.97	54	-12.03	-	-	68.2	-26.23	0-360	100	H
4	*** 8.198	37.38	Pk	35.8	-27.4	.8	46.58	54	-7.42	74	-27.42	-	-	0-360	100	H
9	*** 9.08373	35.75	Pk	36.3	-26	.2	46.25	54	-7.75	74	-27.75	-	-	0-360	200	V
5	*** 9.4668	36.24	Pk	36.7	-25.7	.3	47.54	54	-6.46	74	-26.46	-	-	0-360	100	H
10	*** 9.46637	37.33	PK2	36.7	-25.8	.3	48.53	-	-	74	-25.47	-	-	177	233	V
	*** 9.46819	25.12	ADR	36.7	-25.7	.3	36.42	54	-17.58	-	-	-	-	177	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 - Maximum Peak

ADR - RMS average


MID

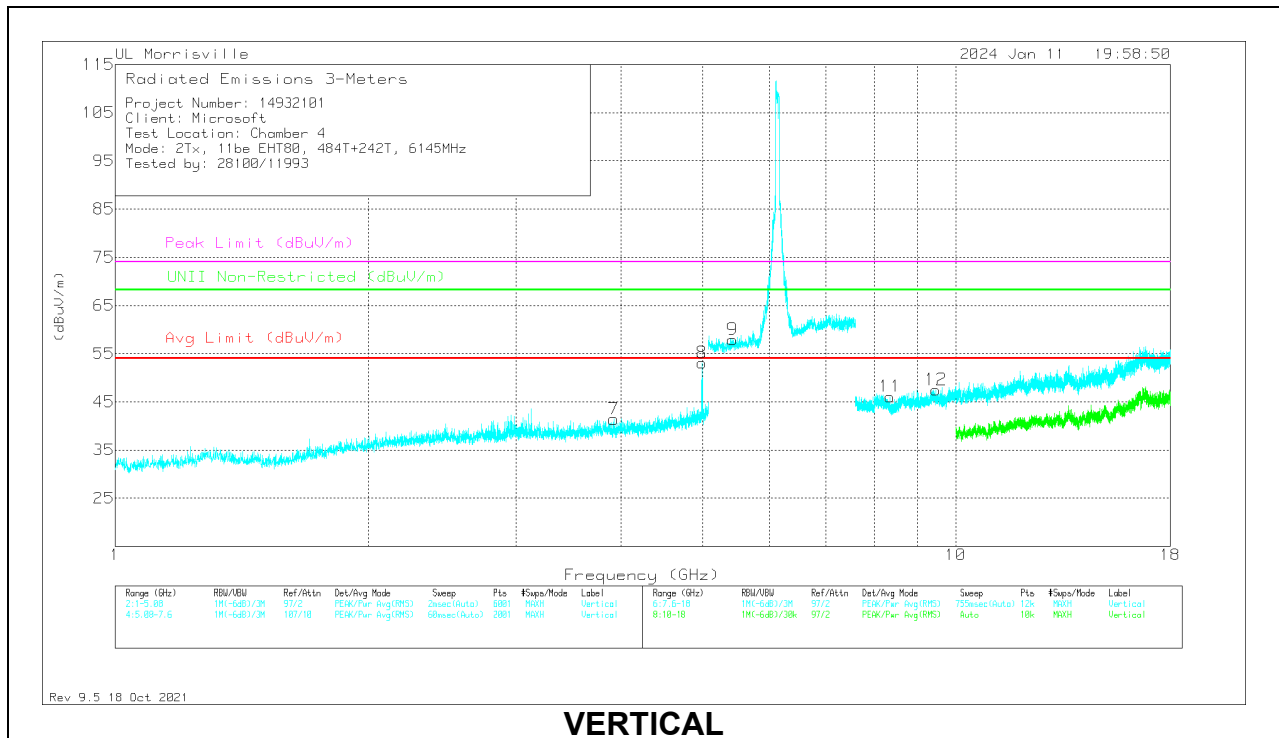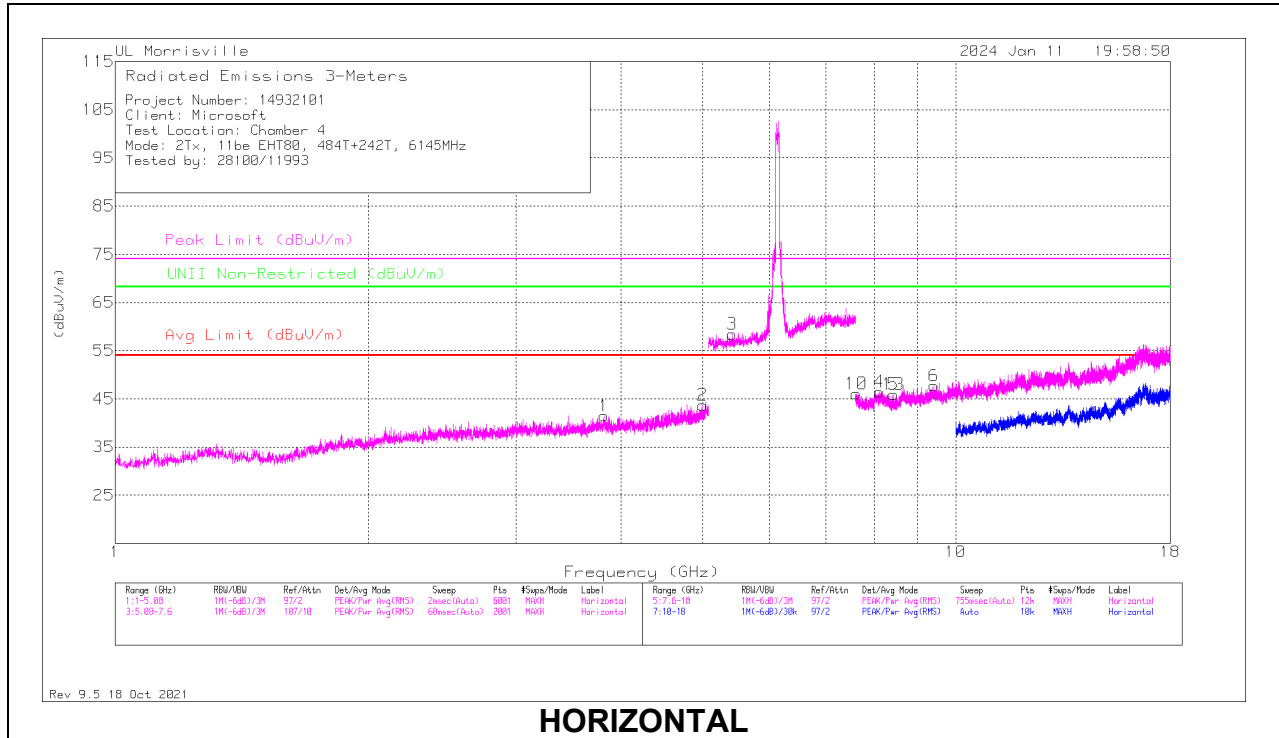


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
10	*** 7.61647	36.65	Pk	35.7	-28	1.7	46.05	54	-7.95	74	-27.95	-	-	0-360	100	H
4	*** 8.11133	37.73	Pk	35.8	-27.8	.7	46.43	54	-7.57	74	-27.57	-	-	0-360	100	H
11	*** 8.35573	36.69	Pk	35.8	-26.9	.5	46.09	54	-7.91	74	-27.91	-	-	0-360	200	V
5	*** 8.432	36.82	Pk	35.8	-27.2	.5	45.92	54	-8.08	74	-28.08	-	-	0-360	100	H
13	*** 8.432	36.82	Pk	35.8	-27.2	.5	45.92	54	-8.08	74	-28.08	-	-	0-360	100	H
6	*** 9.4226	36.69	Pk	36.6	-26	.4	47.69	54	-6.31	74	-26.31	-	-	0-360	100	H
12	*** 9.47373	36.4	Pk	36.7	-26	.4	47.5	54	-6.5	74	-26.5	-	-	0-360	200	V
1	*** 3.81588	40.85	Pk	33.3	-32.7	0	41.45	54	-12.55	74	-32.55	-	-	0-360	100	H
2	*** 5.00112	40.02	Pk	34.1	-30.4	0	43.72	54	-10.28	74	-30.28	-	-	0-360	100	H
7	*** 3.91924	40.82	Pk	33.3	-32.7	0	41.42	54	-12.58	74	-32.58	-	-	0-360	200	V
8	*** 4.99179	43.02	PK2	34.1	-30.3	0	46.82	-	-	74	-27.18	-	-	357	218	V
	*** 4.99101	31.31	ADR	34.1	-30.3	0	35.11	54	-18.89	-	-	-	-	357	218	V
3	*** 5.41501	33.13	PK2	34.6	-8.8	0	58.93	-	-	74	-15.07	-	-	317	172	H
	*** 5.41485	21.83	ADR	34.6	-8.8	0	47.63	54	-6.37	-	-	-	-	317	172	H
9	*** 5.42611	33.45	PK2	34.6	-8.9	0	59.15	-	-	74	-14.85	-	-	350	356	V
	*** 5.42553	21.75	ADR	34.6	-9	0	47.35	54	-6.65	-	-	-	-	350	356	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK2 - Maximum Peak
 ADR - RMS average

HIGH

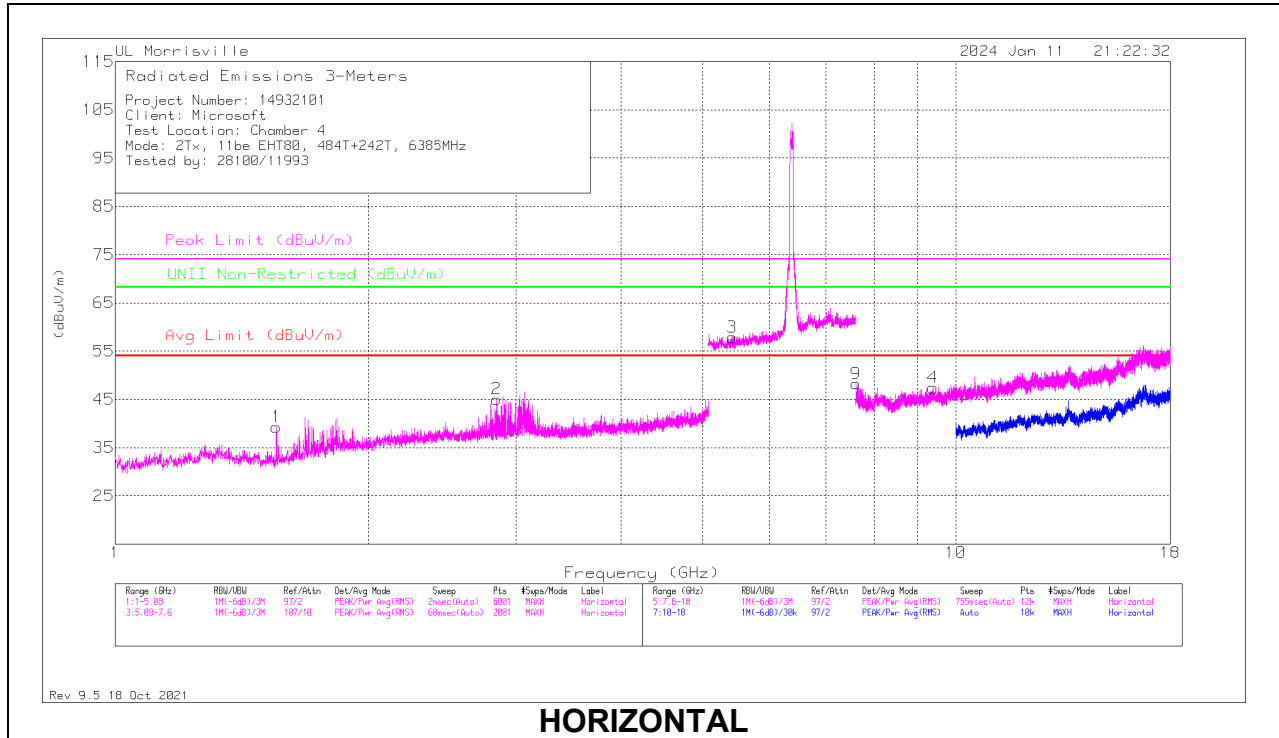

HORIZONTAL

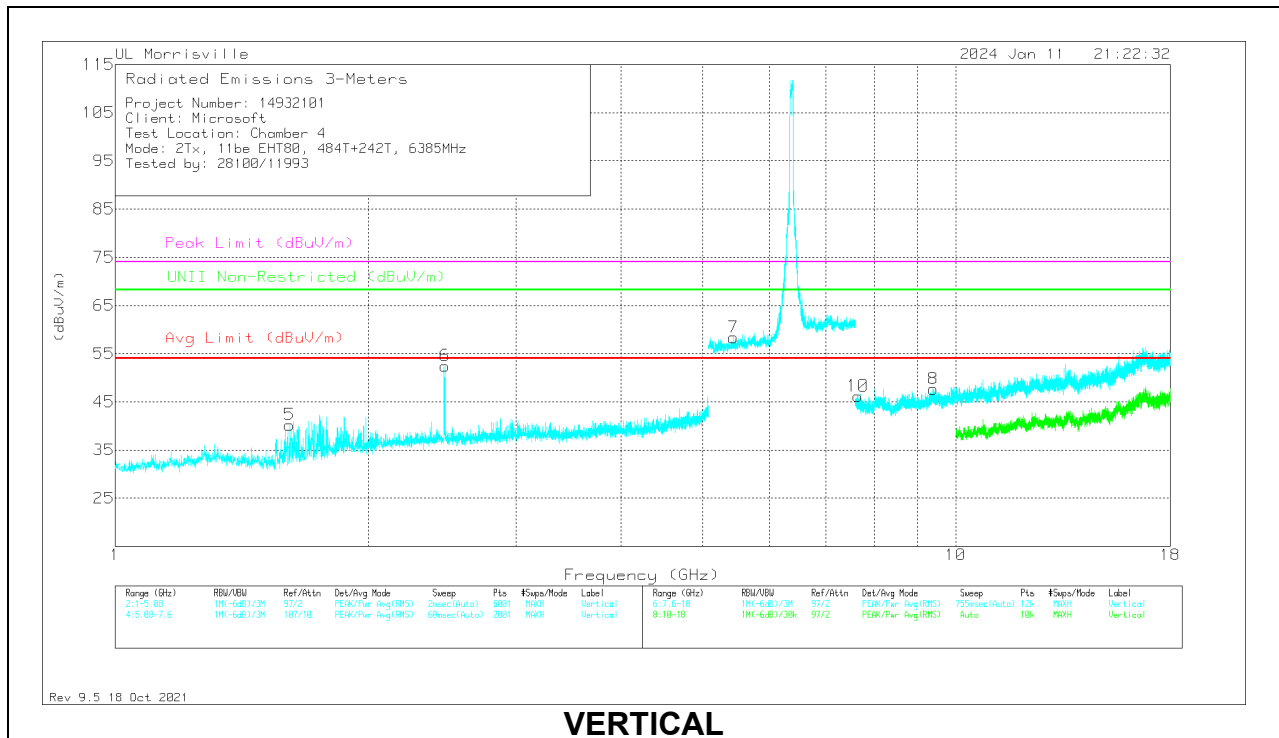

VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 1.55488	47.46	Pk	27.8	-36	0	39.26	54	-14.74	74	-34.74	-	-	0-360	100	H
2	*** 2.84144	47.94	Pk	32.3	-35.2	0	45.04	54	-8.96	74	-28.96	-	-	0-360	100	H
5	*** 1.612	48.02	Pk	28.1	-35.9	0	40.22	54	-13.78	74	-33.78	-	-	0-360	200	V
3	*** 5.41786	33.63	PK2	34.6	-8.8	0	59.43	-	-	74	-14.57	-	-	279	144	H
	*** 5.41744	21.86	ADR	34.6	-8.8	0	47.66	54	-6.34	-	-	-	-	279	144	H
7	*** 5.43739	33.83	PK2	34.6	-9	0	59.43	-	-	74	-14.57	-	-	231	102	V
	*** 5.4366	22.08	ADR	34.6	-9	0	47.68	54	-6.32	-	-	-	-	231	102	V
6	2.46812	55.97	Pk	32.3	-35.8	0	52.47	-	-	-	-	68.2	-15.73	0-360	200	V
9	*** 7.60781	37.96	PK2	35.7	-28.2	1.8	47.26	-	-	74	-26.74	-	-	233	328	H
	*** 7.60834	26.26	ADR	35.7	-28.2	1.8	35.56	54	-18.44	-	-	-	-	233	328	H
10	*** 7.64593	37.29	Pk	35.7	-28.2	1.4	46.19	54	-7.81	74	-27.81	-	-	0-360	200	V
4	*** 9.39747	36.61	Pk	36.6	-26.2	.4	47.41	54	-6.59	74	-26.59	-	-	0-360	100	H
8	*** 9.3992	36.86	Pk	36.6	-26.3	.5	47.66	54	-6.34	74	-26.34	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK2 - Maximum Peak
 ADR - RMS average

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+242T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

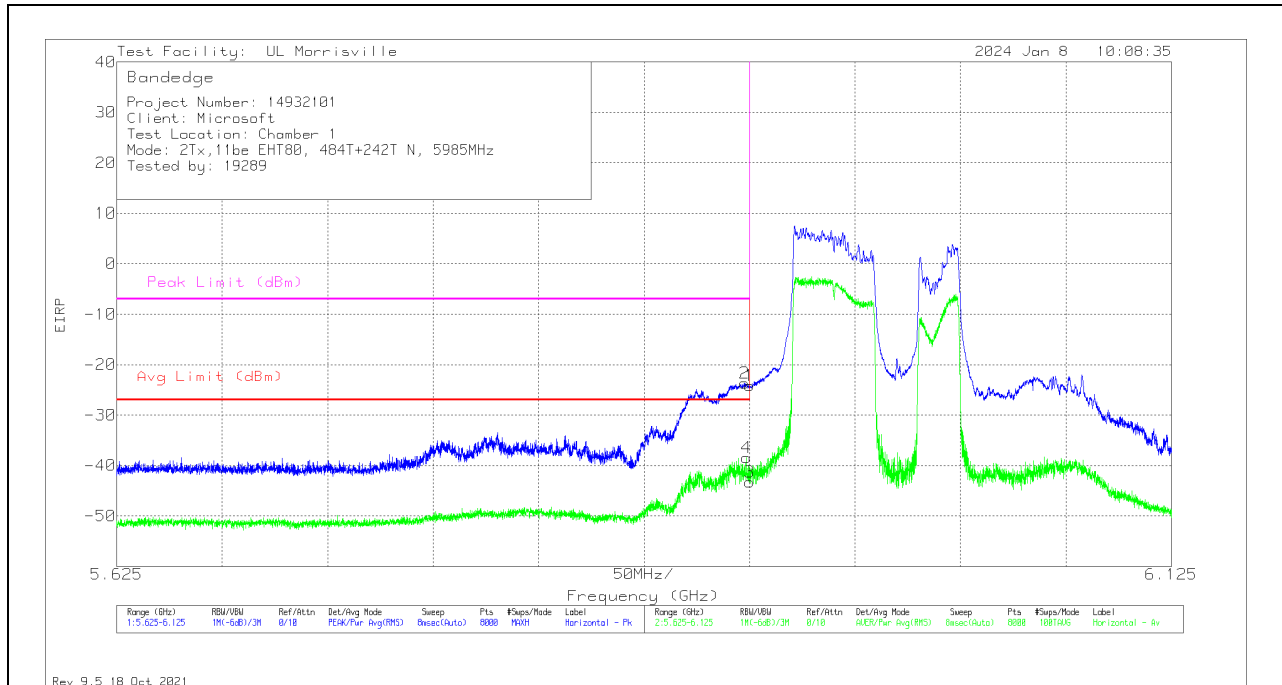

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.9226	-57.91	Pk	35	-22.6	11.8	10	0	-23.71	-	-	-7	-16.71	213	391	H
4	5.92354	-72.75	RMS	35	-22.6	11.8	10	.1	-38.45	-27	-11.45	-	-	213	391	H
1	5.92498	-58.33	Pk	35	-22.6	11.8	10	0	-24.13	-	-	-7	-17.13	213	391	H
3	5.92498	-77.57	RMS	35	-22.6	11.8	10	.1	-43.27	-27	-16.27	-	-	213	391	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

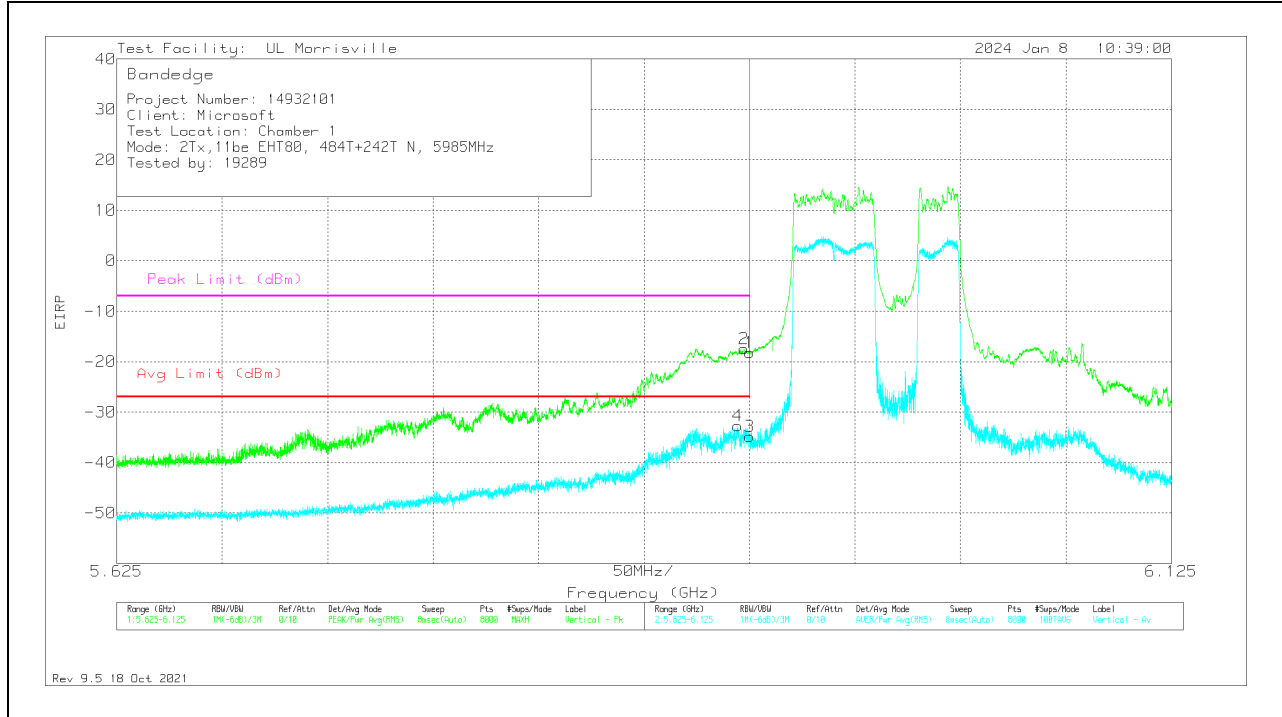


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.91941	-66.99	RMS	35	-22.6	11.8	10	.1	-32.69	-27	-5.69	-	-	298	209	V
2	5.92229	-51.67	Pk	35	-22.6	11.8	10	0	-17.47	-	-	-7	-10.47	298	209	V
1	5.92498	-52.36	Pk	35	-22.6	11.8	10	0	-18.16	-	-	-7	-11.16	298	209	V
3	5.92498	-69.17	RMS	35	-22.6	11.8	10	.1	-34.87	-27	-7.87	-	-	298	209	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 242T+484T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

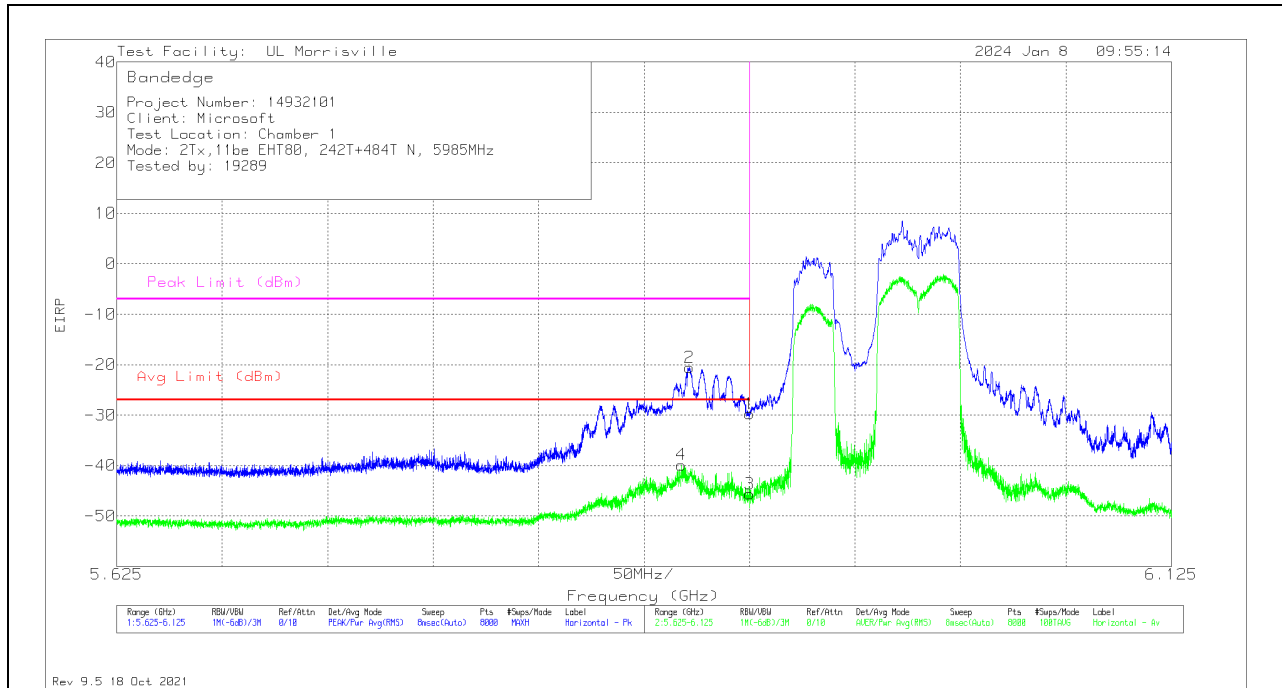

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.89266	-73.76	RMS	34.9	-22.9	11.8	10	.1	-39.86	-27	-12.86	-	-	270	390	H
2	5.89641	-54.57	Pk	34.9	-22.7	11.8	10	0	-20.57	-	-	-7	-13.57	270	390	H
1	5.92498	-63.92	Pk	35	-22.6	11.8	10	0	-29.72	-	-	-7	-22.72	270	390	H
3	5.92498	-79.94	RMS	35	-22.6	11.8	10	.1	-45.64	-27	-18.64	-	-	270	390	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

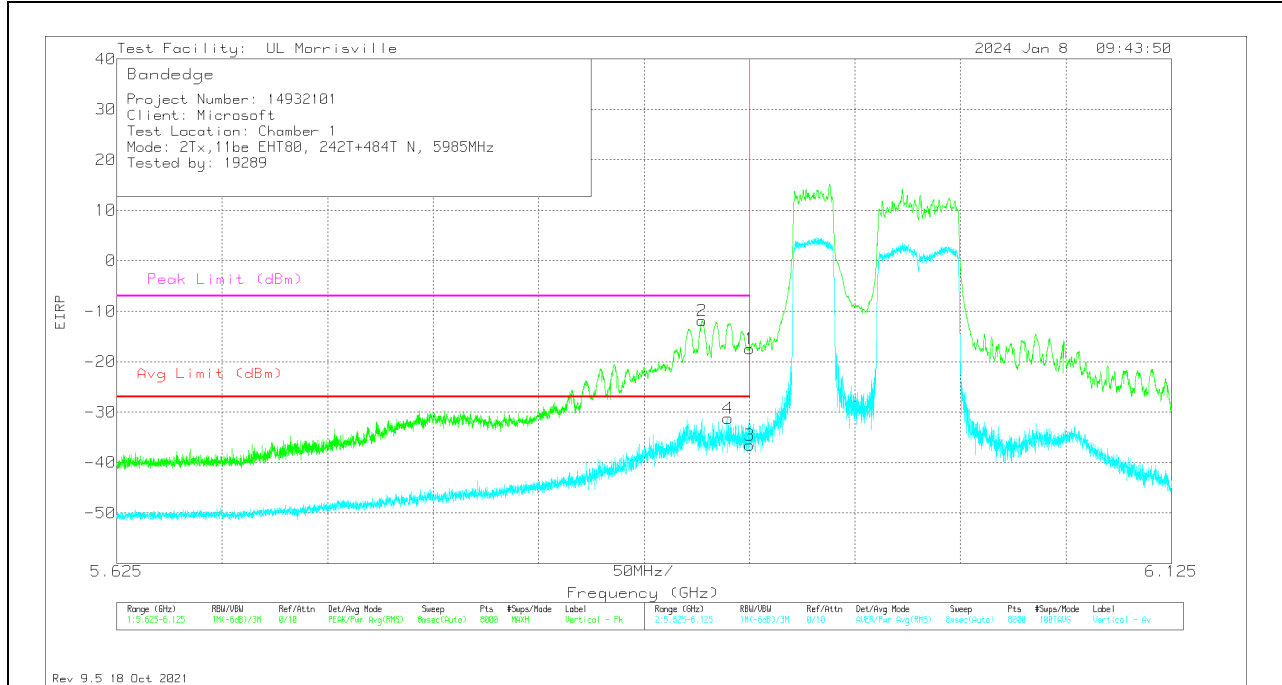


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.90241	-46.1	Pk	34.9	-22.5	11.8	10	0	-11.9	-	-	-7	-4.9	300	262	V
4	5.91479	-65.47	RMS	35	-22.7	11.8	10	.1	-31.27	-27	-4.27	-	-	300	262	V
1	5.92498	-51.66	Pk	35	-22.6	11.8	10	0	-17.46	-	-	-7	-10.46	300	262	V
3	5.92498	-70.82	RMS	35	-22.6	11.8	10	.1	-36.52	-27	-9.52	-	-	300	262	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

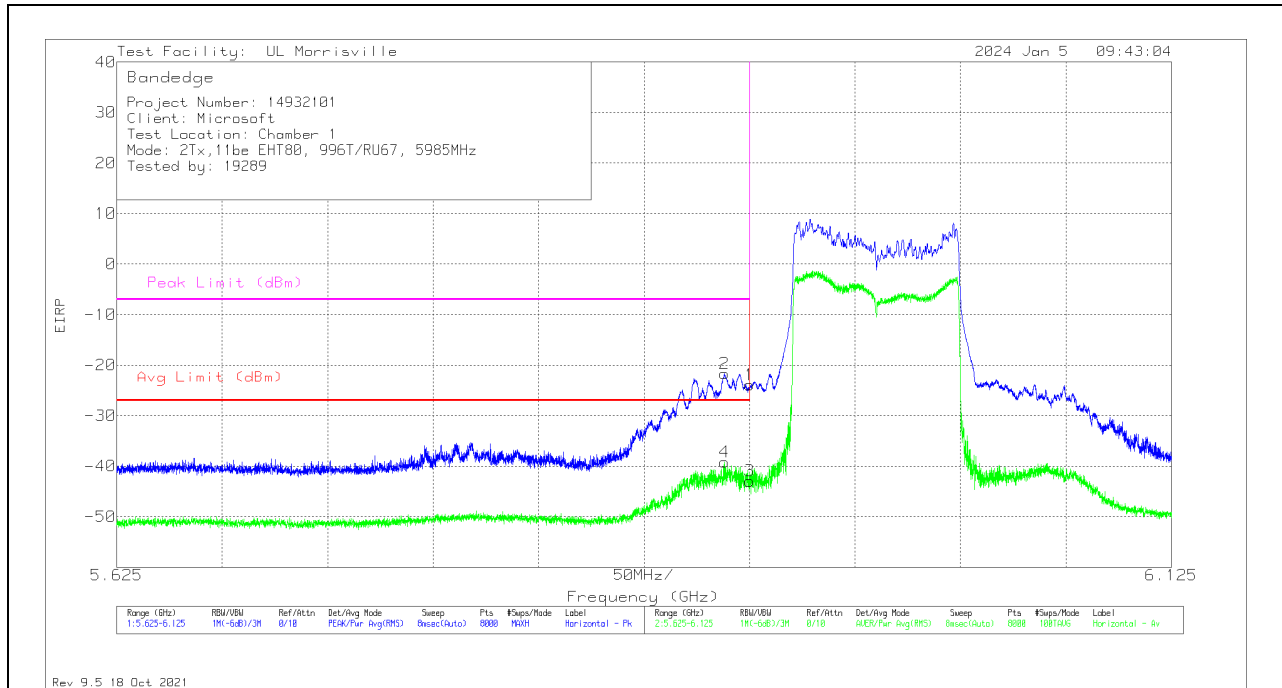

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.91304	-55.79	Pk	35	-22.7	11.8	10	-21.69	-	-	-7	-14.69	252	396	H
4	5.91329	-73.3	RMS	35	-22.7	11.8	10	-39.2	-27	-12.2	-	-	252	396	H
1	5.92498	-58.1	Pk	35	-22.6	11.8	10	-23.9	-	-	-7	-16.9	252	396	H
3	5.92498	-77.16	RMS	35	-22.6	11.8	10	-42.96	-27	-15.96	-	-	252	396	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

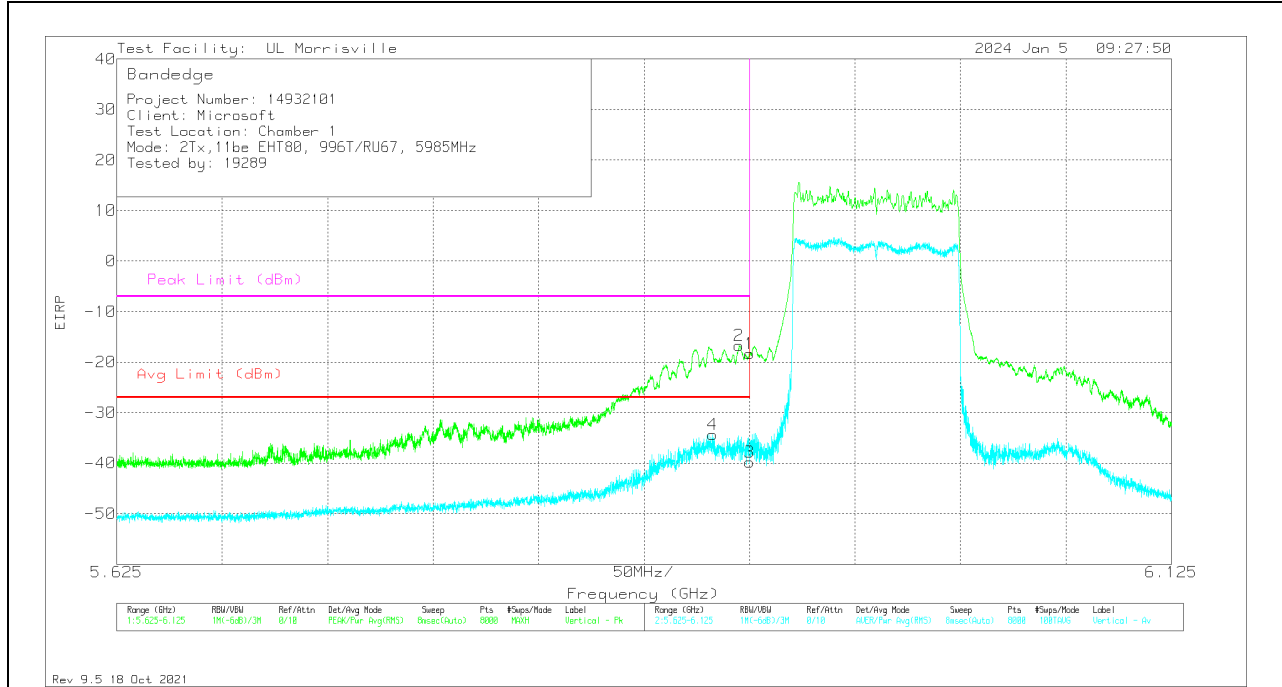

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.9076	-68.48	RMS	35	-22.6	11.8	10	-34.28	-27	-7.28	-	-	308	221	V
2	5.9201	-50.96	Pk	35	-22.6	11.8	10	-16.76	-	-	-7	-9.76	308	221	V
1	5.92498	-52.56	Pk	35	-22.6	11.8	10	-18.36	-	-	-7	-11.36	308	221	V
3	5.92498	-73.99	RMS	35	-22.6	11.8	10	-39.79	-27	-12.79	-	-	308	221	V


Pk - Peak detector
 RMS - RMS detection

10.1.5. TX ABOVE 1 GHz 802.11be EHT160 MODE IN THE UNII-5 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

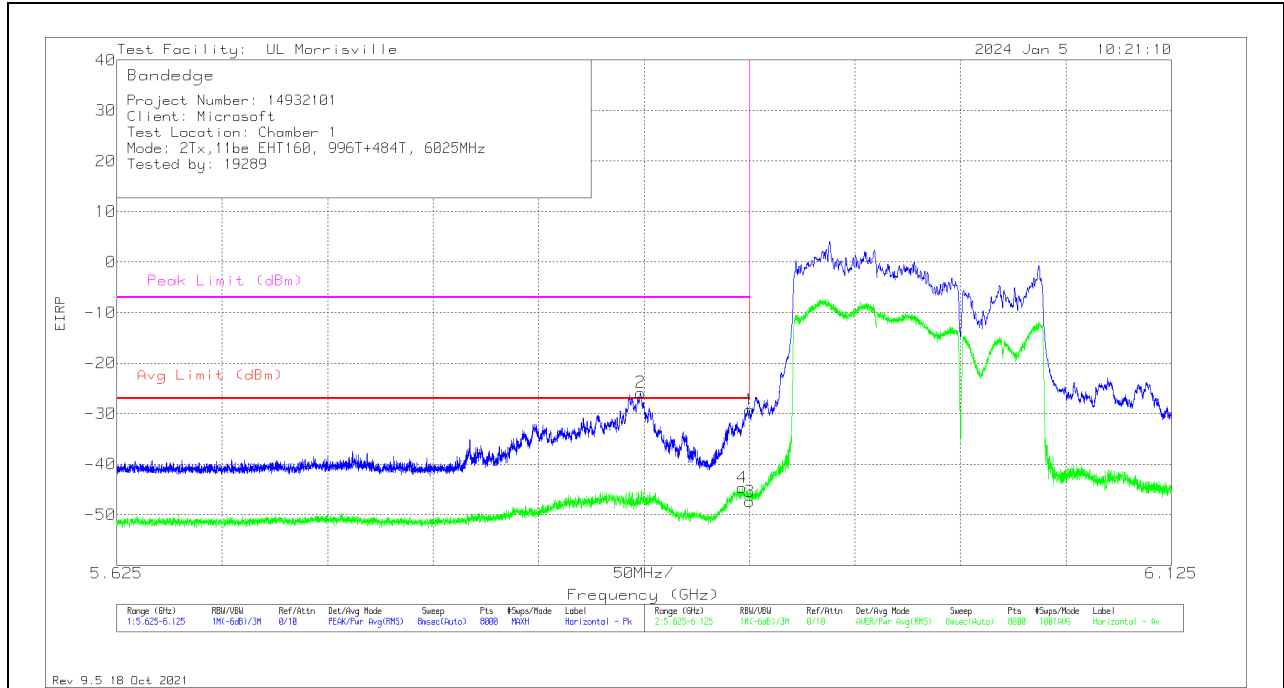

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.87347	-59.73	Pk	34.9	-22.8	11.8	10	-25.83	-	-	-7	-18.83	222	396	H
4	5.92141	-78.85	RMS	35	-22.6	11.8	10	-44.65	-27	-17.65	-	-	222	396	H
1	5.92498	-63.46	Pk	35	-22.6	11.8	10	-29.26	-	-	-7	-22.26	222	396	H
3	5.92498	-81.6	RMS	35	-22.6	11.8	10	-47.4	-27	-20.4	-	-	222	396	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

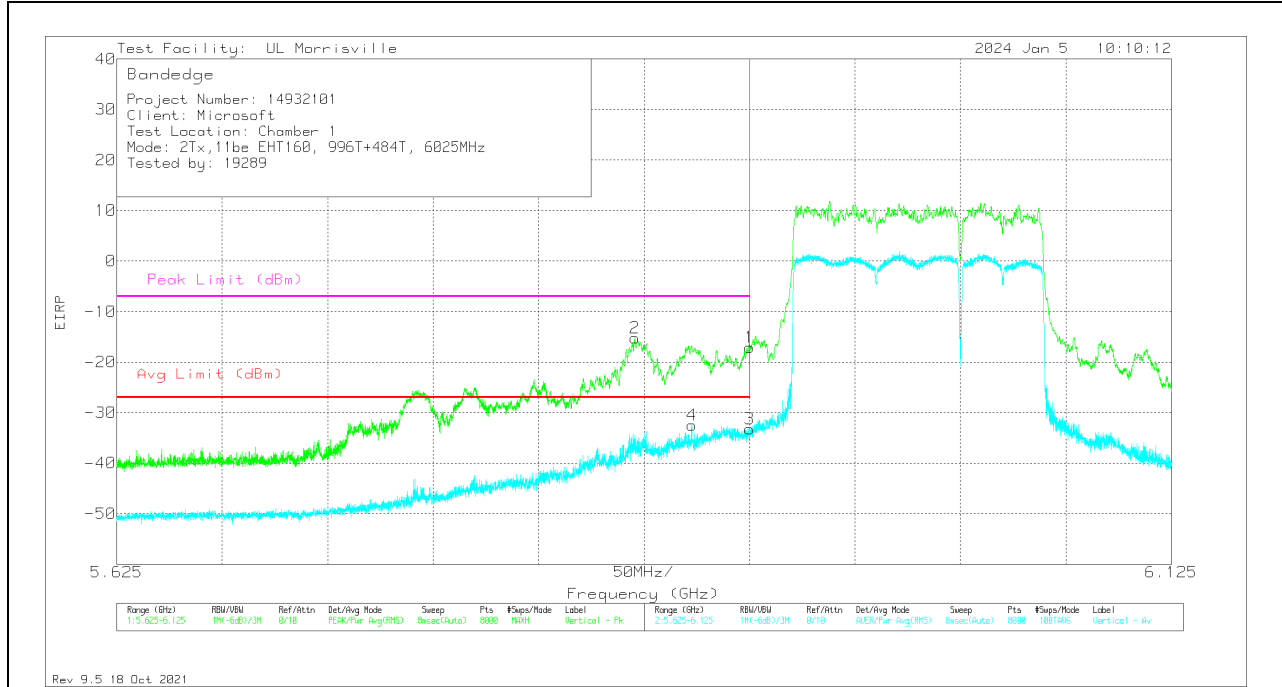


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.87059	-49.17	Pk	34.9	-22.8	11.8	10	-15.27	-	-	-7	-8.27	300	216	V
4	5.89772	-66.5	RMS	34.9	-22.7	11.8	10	-32.5	-27	-5.5	-	-	300	216	V
1	5.92498	-51.23	Pk	35	-22.6	11.8	10	-17.03	-	-	-7	-10.03	300	216	V
3	5.92498	-67.38	RMS	35	-22.6	11.8	10	-33.18	-27	-6.18	-	-	300	216	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

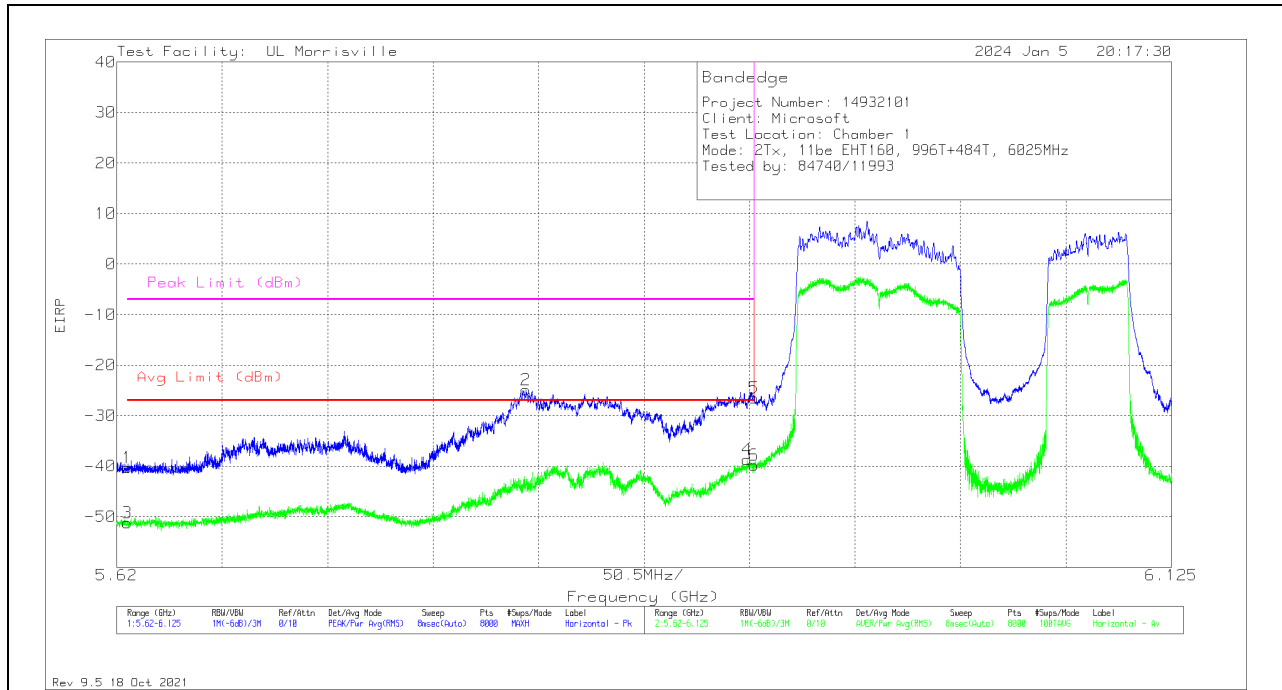

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-73.45	Pk	34.4	-23	11.8	10	-40.25	-	-	-7	-33.25	249	395	H
3	5.62505	-84.41	RMS	34.4	-23	11.8	10	-51.21	-27	-24.21	-	-	249	395	H
2	5.81596	-58.31	Pk	34.7	-23.1	11.8	10	-24.91	-	-	-7	-17.91	249	395	H
4	5.9219	-72.93	RMS	35	-22.6	11.8	10	-38.73	-27	-11.73	-	-	249	395	H
5	5.925	-60.75	Pk	35	-22.6	11.8	10	-26.55	-	-	-7	-19.55	249	395	H
6	5.925	-73.99	RMS	35	-22.6	11.8	10	-39.79	-27	-12.79	-	-	249	395	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

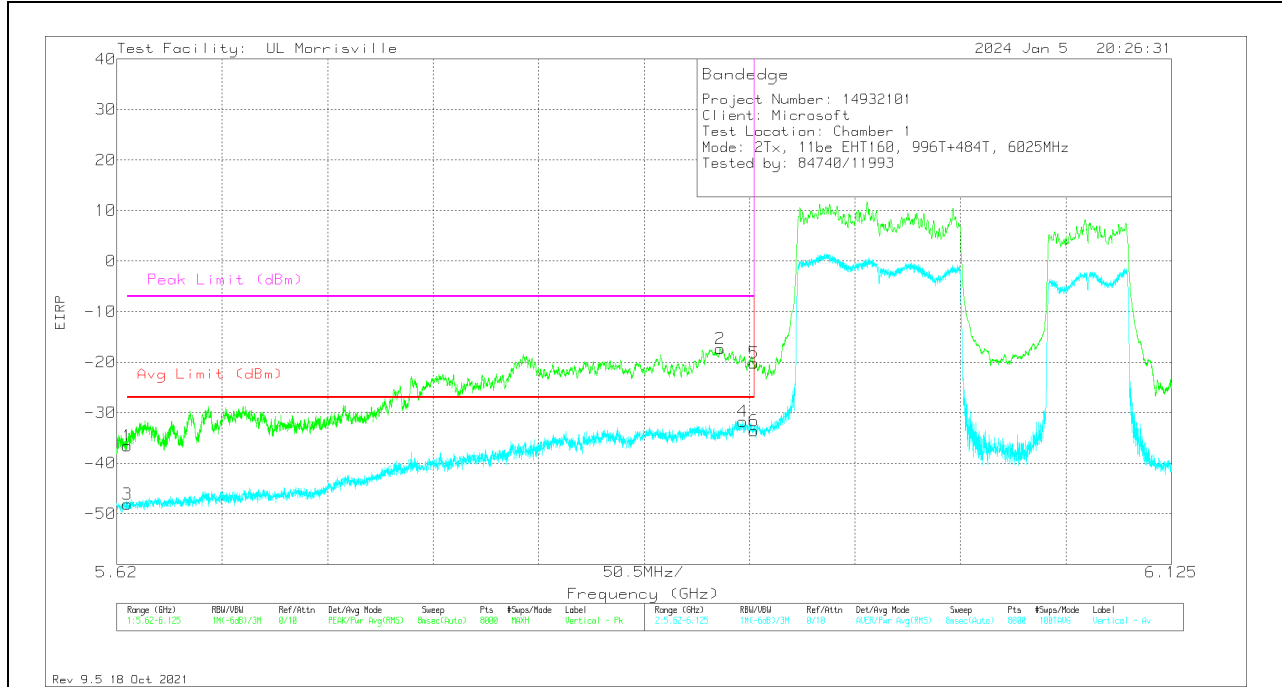


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-69.8	Pk	34.4	-23	11.8	10	-36.6	-	-	-7	-29.6	296	256	V
3	5.62505	-81.3	RMS	34.4	-23	11.8	10	-48.1	-27	-21.1	-	-	296	255	V
2	5.9089	-51.51	Pk	35	-22.6	11.8	10	-17.31	-	-	-7	-10.31	296	256	V
4	5.91969	-65.97	RMS	35	-22.6	11.8	10	-31.77	-27	-4.77	-	-	296	255	V
5	5.925	-54.34	Pk	35	-22.6	11.8	10	-20.14	-	-	-7	-13.14	296	256	V
6	5.925	-67.78	RMS	35	-22.6	11.8	10	-33.58	-27	-6.58	-	-	296	255	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

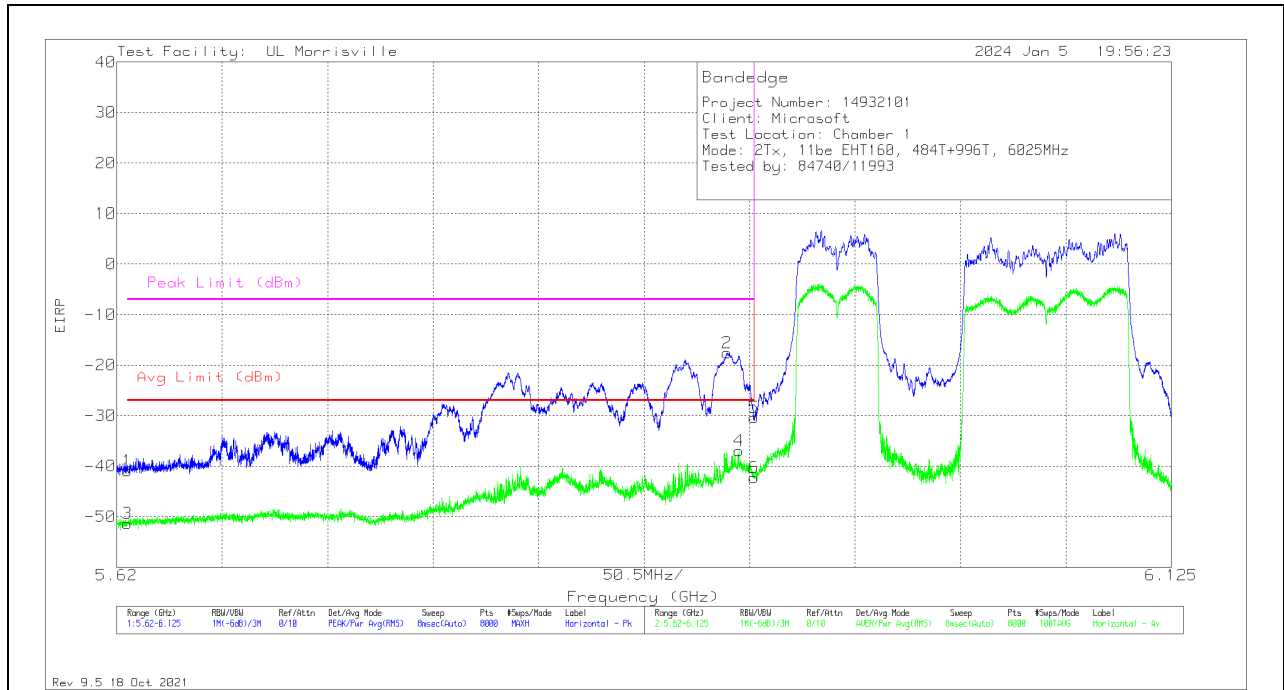

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-74.11	Pk	34.4	-23	11.8	10	-40.91	-	-	-7	-33.91	263	399	H
3	5.62505	-84.51	RMS	34.4	-23	11.8	10	-51.31	-27	-24.31	-	-	263	399	H
2	5.91224	-51.65	Pk	35	-22.7	11.8	10	-17.55	-	-	-7	-10.55	263	399	H
4	5.9178	-71.1	RMS	35	-22.6	11.8	10	-36.9	-27	-9.9	-	-	263	399	H
5	5.925	-64.6	Pk	35	-22.6	11.8	10	-30.4	-	-	-7	-23.4	263	399	H
6	5.925	-76.44	RMS	35	-22.6	11.8	10	-42.24	-27	-15.24	-	-	263	399	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

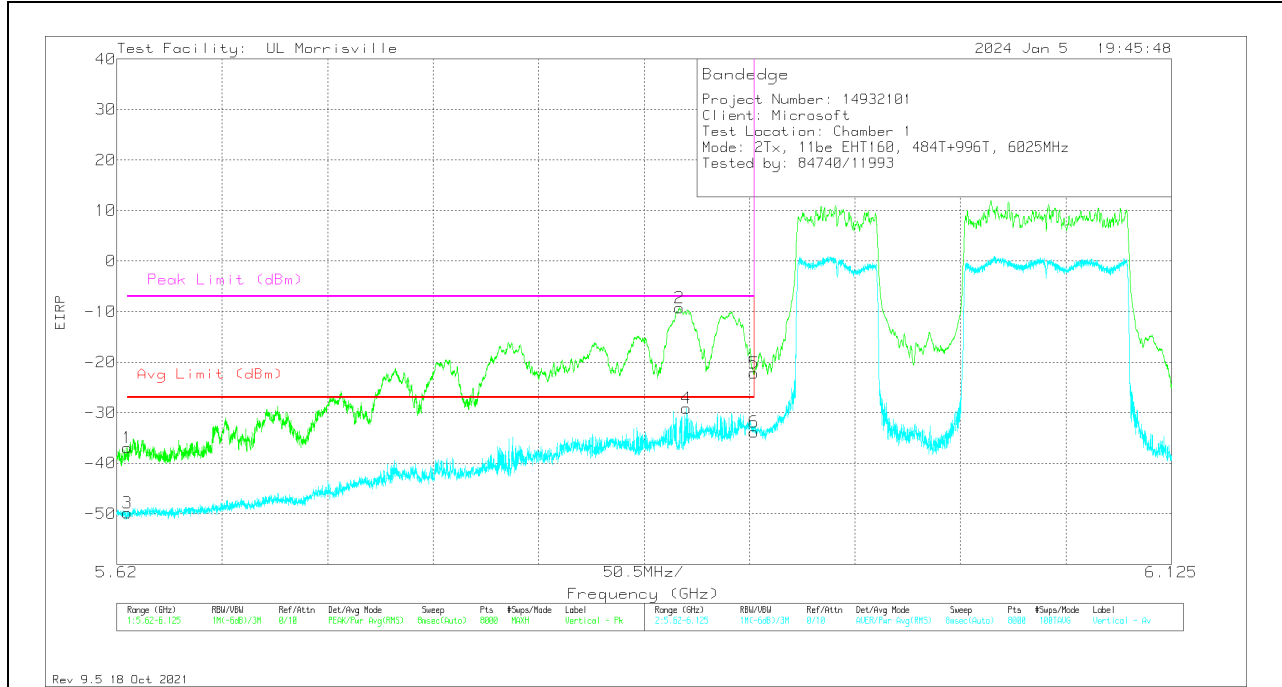


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-70.13	Pk	34.4	-23	11.8	10	-36.93	-	-	-7	-29.93	310	222	V
3	5.62505	-83.09	RMS	34.4	-23	11.8	10	-49.89	-27	-22.89	-	-	310	222	V
2	5.88951	-43	Pk	34.9	-23	11.8	10	-9.3	-	-	-7	-2.3	310	222	V
4	5.89273	-62.91	RMS	34.9	-22.9	11.8	10	-29.11	-27	-2.11	-	-	310	222	V
5	5.925	-56.32	Pk	35	-22.6	11.8	10	-22.12	-	-	-7	-15.12	310	222	V
6	5.925	-68.09	RMS	35	-22.6	11.8	10	-33.89	-27	-6.89	-	-	310	222	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: SU

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

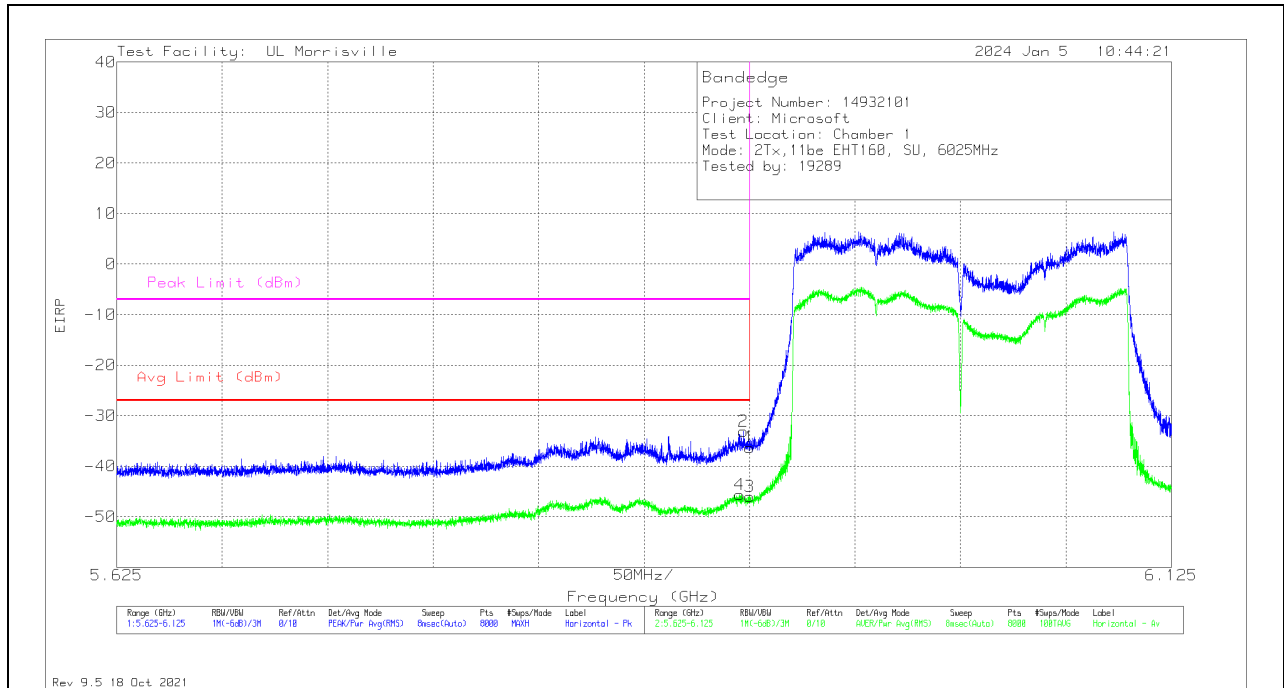

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.92016	-79.91	RMS	35	-22.6	11.8	10	.11	-45.6	-27	-18.6	-	-	251	388	H
2	5.9221	-67.34	Pk	35	-22.6	11.8	10	0	-33.14	-	-	-7	-26.14	251	388	H
1	5.92498	-70.46	Pk	35	-22.6	11.8	10	0	-36.26	-	-	-7	-29.26	251	388	H
3	5.92498	-80.28	RMS	35	-22.6	11.8	10	.11	-45.97	-27	-18.97	-	-	251	388	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

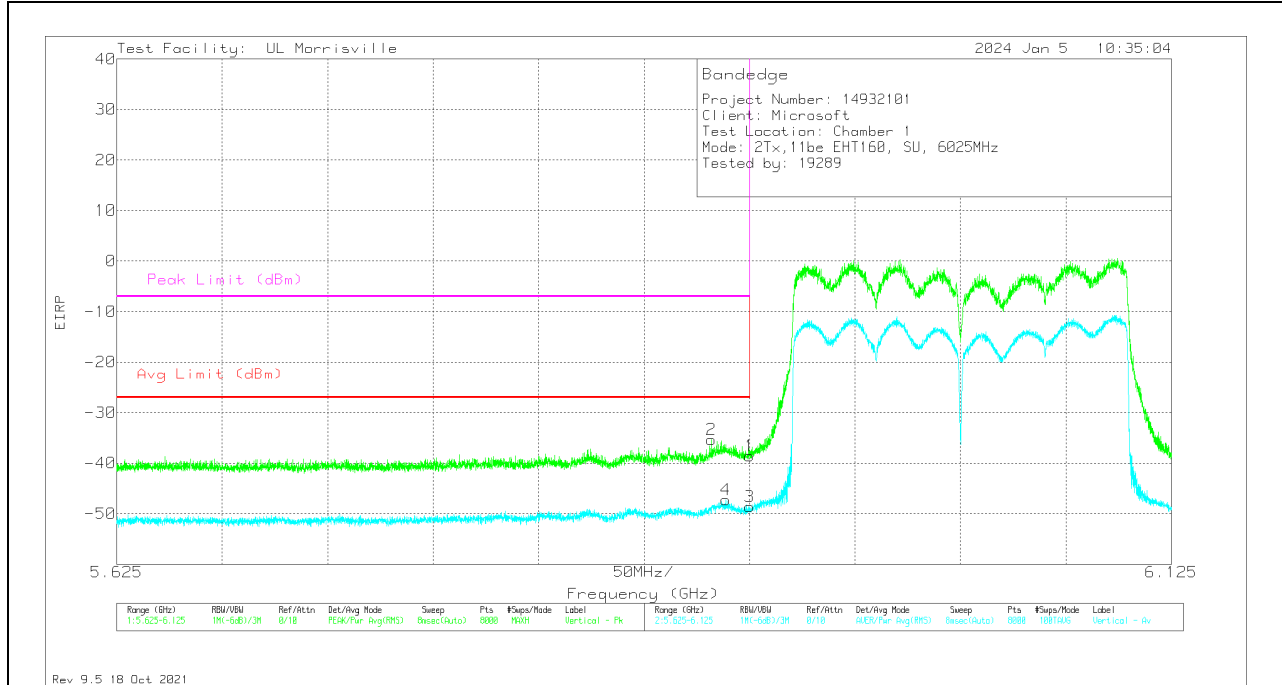

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.90697	-69.53	Pk	35	-22.6	11.8	10	0	-35.33	-	-	-7	-28.33	260	390	V
4	5.91372	-81.5	RMS	35	-22.7	11.8	10	.11	-47.29	-27	-20.29	-	-	260	390	V
1	5.92498	-72.75	Pk	35	-22.6	11.8	10	0	-38.55	-	-	-7	-31.55	260	390	V
3	5.92498	-82.94	RMS	35	-22.6	11.8	10	.11	-48.63	-27	-21.63	-	-	260	390	V


Pk - Peak detector
 RMS - RMS detection

10.1.6. TX ABOVE 1 GHz 802.11be EHT320 MODE IN THE UNII-5 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

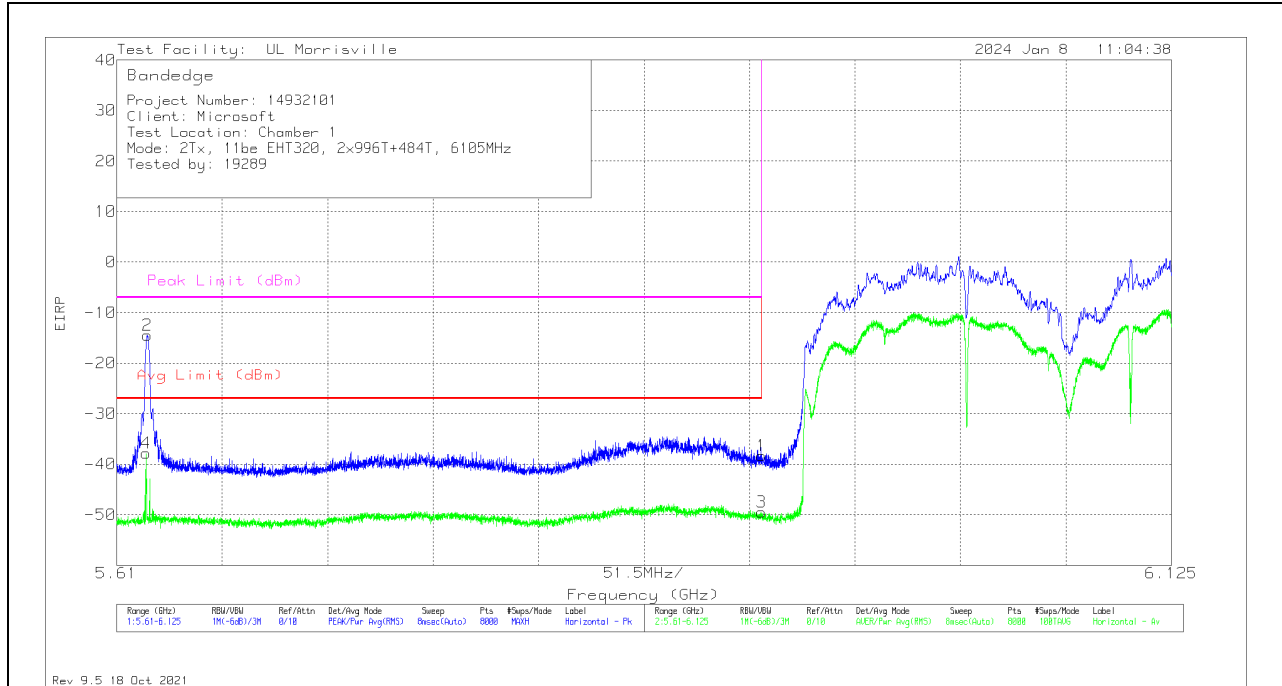

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62449	-71	RMS	34.4	-23	11.8	9.9	.14	-37.76	-27	-10.76	-	-	218	398	H
2	5.625	-47.71	Pk	34.4	-23	11.8	10	0	-14.51	-	-	-7	-7.51	218	398	H
1	5.92496	-72.46	Pk	35	-22.6	11.8	10	0	-38.26	-	-	-7	-31.26	218	398	H
3	5.92496	-83.81	RMS	35	-22.6	11.8	10	.14	-49.47	-27	-22.47	-	-	218	398	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

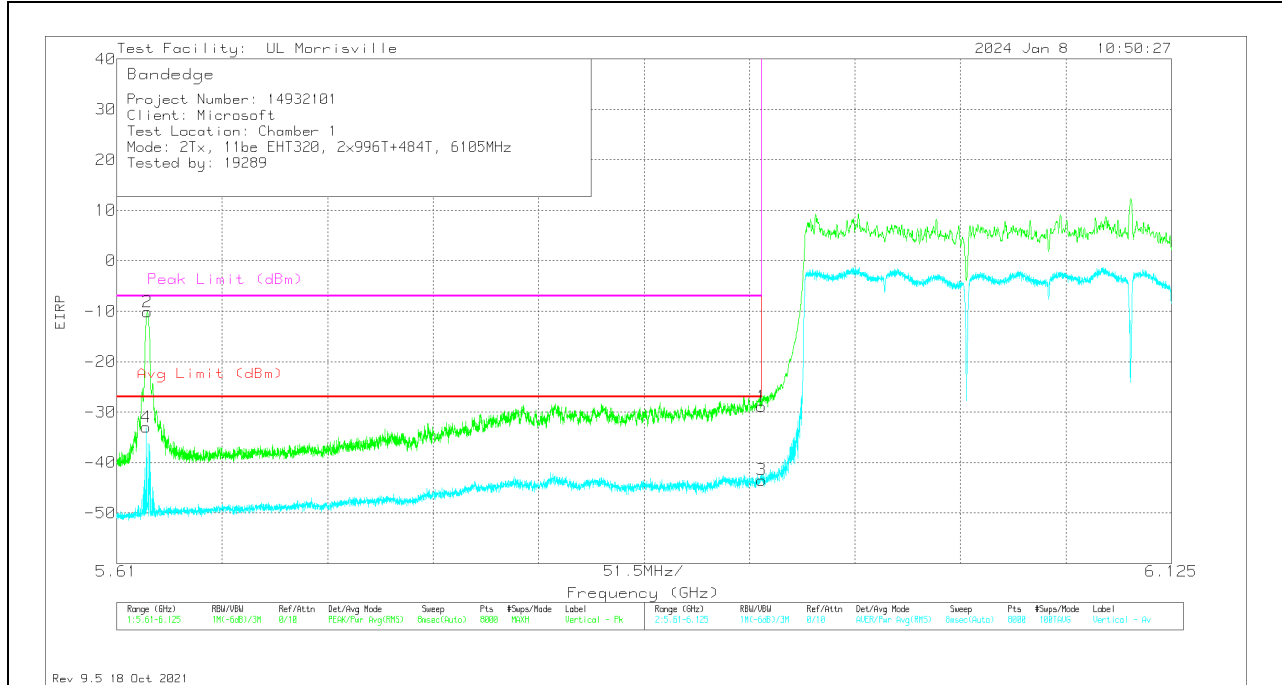


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62449	-66.24	RMS	34.4	-23	11.8	9.9	.14	-33	-27	-6	-	-	305	220	V
2	5.625	-43.36	Pk	34.4	-23	11.8	10	0	-10.16	-	-	-7	-3.16	305	220	V
1	5.92496	-63.11	Pk	35	-22.6	11.8	10	0	-28.91	-	-	-7	-21.91	305	220	V
3	5.92496	-77.8	RMS	35	-22.6	11.8	10	.14	-43.46	-27	-16.46	-	-	305	220	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

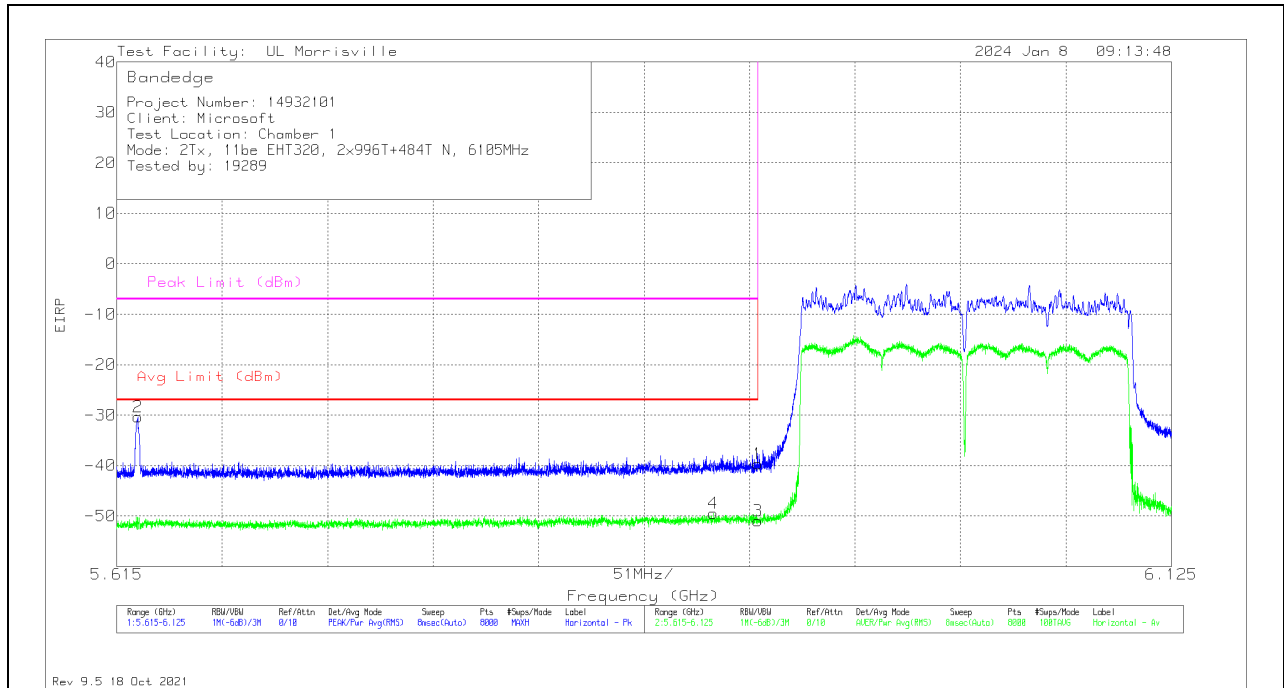

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6252	-63.54	Pk	34.4	-23	11.8	10	-30.34	-	-	-7	-23.34	354	126	H
4	5.90351	-83.72	RMS	34.9	-22.5	11.8	10	-49.52	-27	-22.52	-	-	354	126	H
1	5.92499	-73.85	Pk	35	-22.6	11.8	10	-39.65	-	-	-7	-32.65	354	126	H
3	5.92499	-85.23	RMS	35	-22.6	11.8	10	-51.03	-27	-24.03	-	-	354	126	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

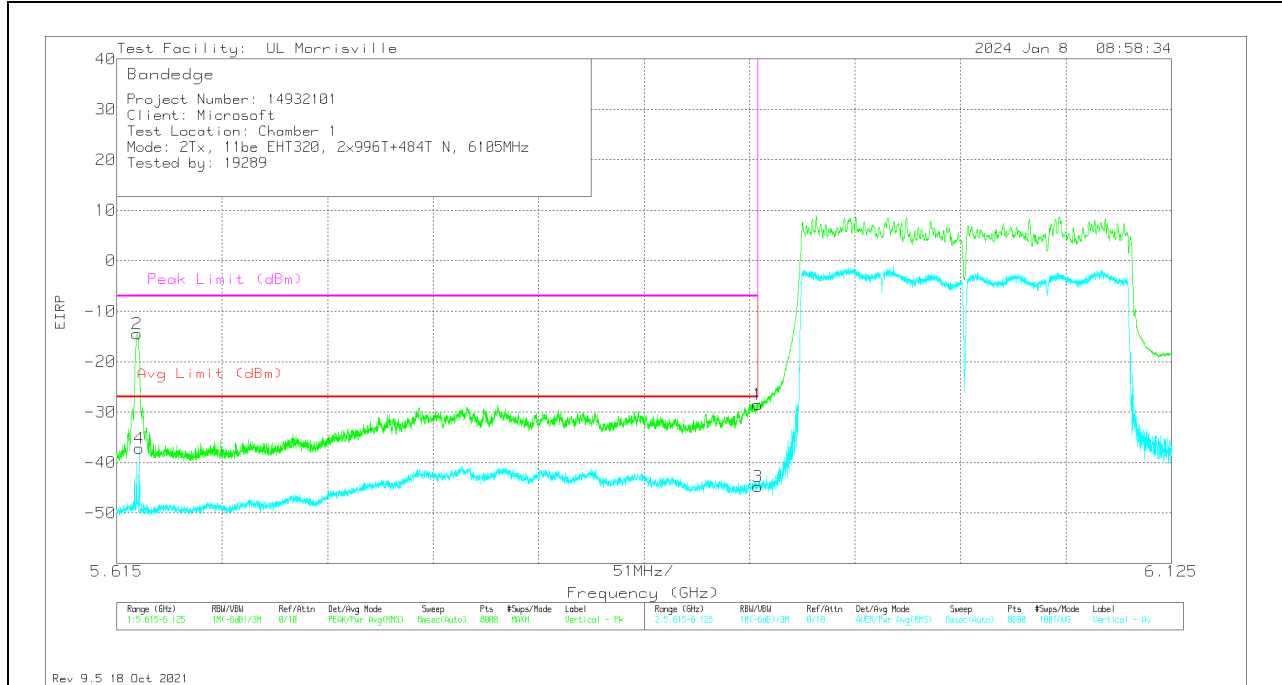


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62482	-47.69	Pk	34.4	-23	11.8	10	-14.49	-	-	-7	-7.49	306	210	V
4	5.62584	-70.44	RMS	34.4	-23	11.8	10	-37.24	-27	-10.24	-	-	306	210	V
1	5.92499	-62.73	Pk	35	-22.6	11.8	10	-28.53	-	-	-7	-21.53	306	210	V
3	5.92499	-78.92	RMS	35	-22.6	11.8	10	-44.72	-27	-17.72	-	-	306	210	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

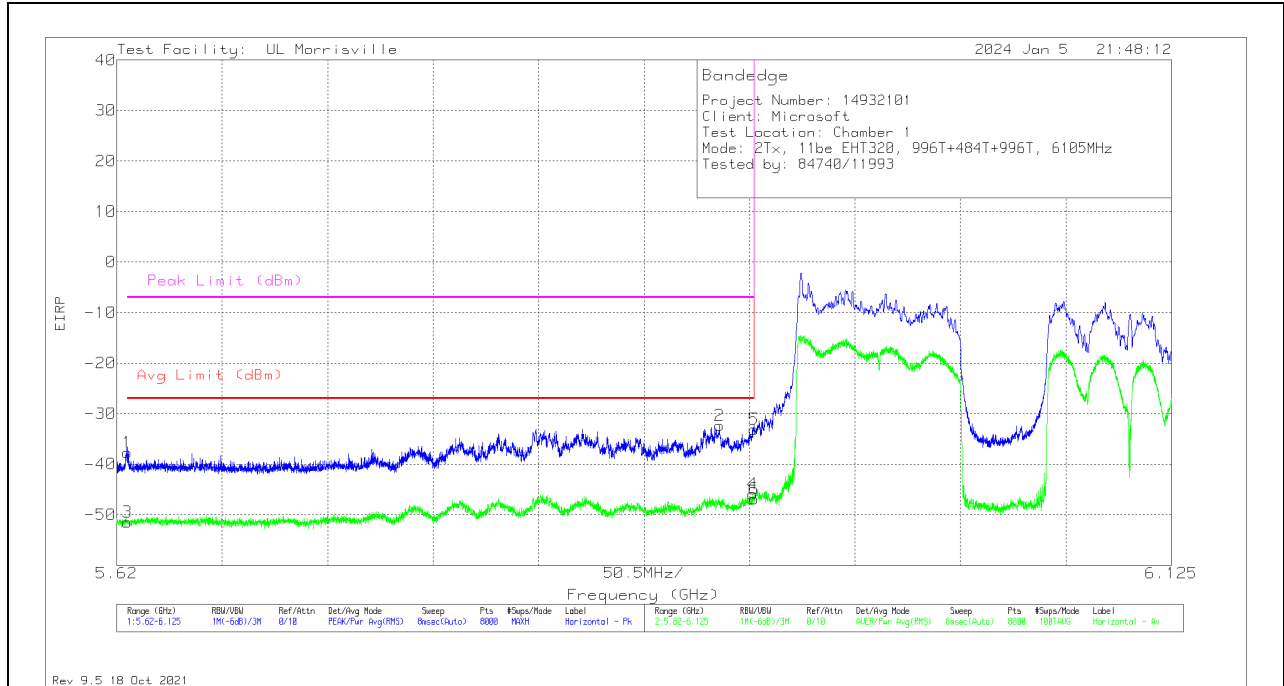

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-70.86	Pk	34.4	-23	11.8	10	-37.66	-	-	-7	-30.66	355	286	H
3	5.62505	-84.63	RMS	34.4	-23	11.8	10	-51.43	-27	-24.43	-	-	355	286	H
2	5.90864	-66.6	Pk	35	-22.6	11.8	10	-32.4	-	-	-7	-25.4	355	286	H
4	5.92468	-80.06	RMS	35	-22.6	11.8	10	-45.86	-27	-18.86	-	-	355	286	H
5	5.925	-67.33	PK	35	-22.6	11.8	10	-33.13	-	-	-7	-26.13	355	286	H
6	5.925	-81.1	RMS	35	-22.6	11.8	10	-46.9	-27	-19.9	-	-	355	286	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

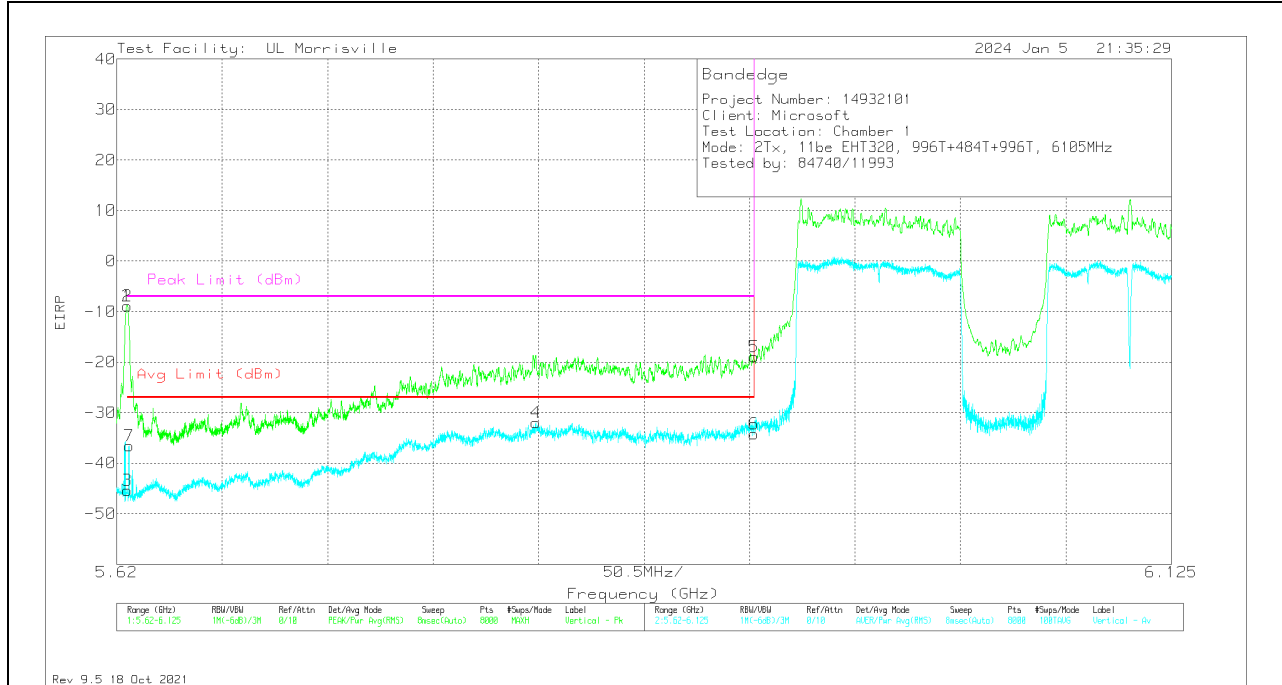


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-42.07	Pk	34.4	-23	11.8	10	-8.87	-	-	-7	-1.87	307	207	V
3	5.62505	-78.63	RMS	34.4	-23	11.8	10	-45.43	-27	-18.43	-	-	307	207	V
2	5.62511	-42.06	Pk	34.4	-23	11.8	10	-8.86	-	-	-7	-1.86	307	207	V
7	5.62593	-69.79	RMS	34.4	-23	11.8	10	-36.59	-27	-9.59	-	-	307	207	V
4	5.82076	-65.57	RMS	34.8	-23	11.8	10	-31.97	-27	-4.97	-	-	307	207	V
5	5.925	-53.09	Pk	35	-22.6	11.8	10	-18.89	-	-	-7	-11.89	307	207	V
6	5.925	-68.4	RMS	35	-22.6	11.8	10	-34.2	-27	-7.2	-	-	307	207	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

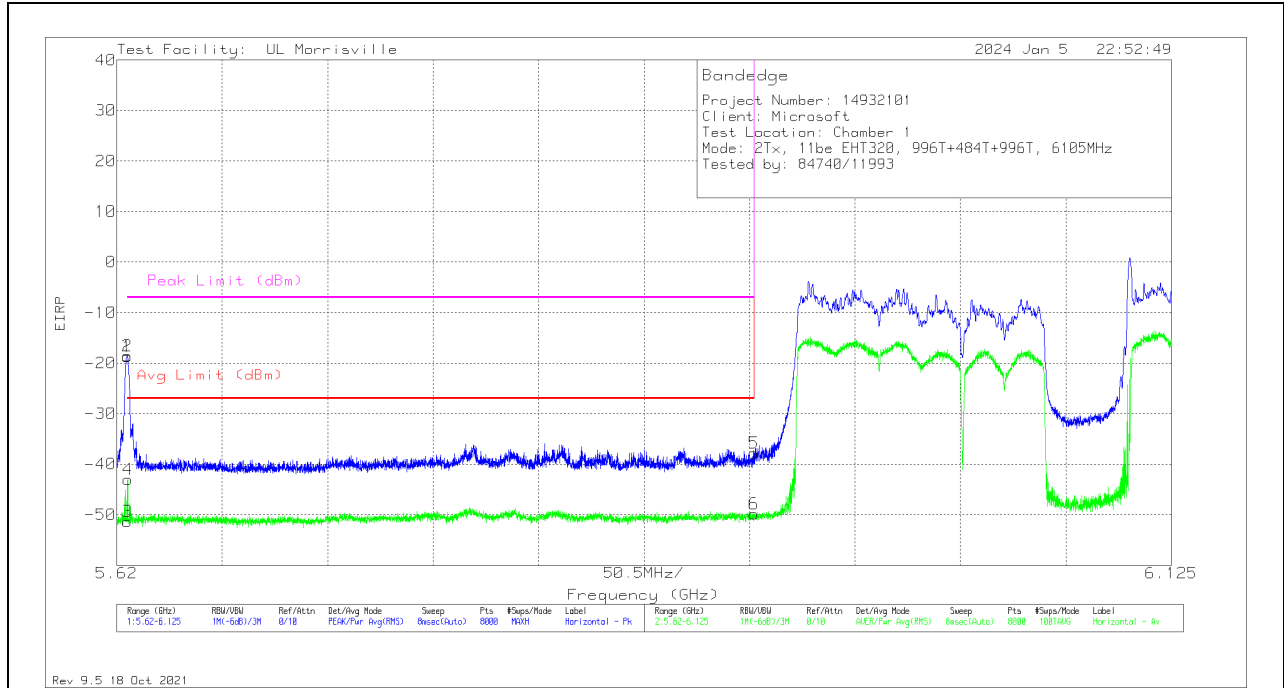

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-51.94	Pk	34.4	-23	11.8	10	-18.74	-	-	-7	-11.74	227	272	H
3	5.62505	-84.54	RMS	34.4	-23	11.8	10	-51.34	-27	-24.34	-	-	227	272	H
2	5.62511	-51.74	Pk	34.4	-23	11.8	10	-18.54	-	-	-7	-11.54	227	272	H
4	5.62537	-76.28	RMS	34.4	-23	11.8	10	-43.08	-27	-16.08	-	-	227	272	H
5	5.925	-71.99	Pk	35	-22.6	11.8	10	-37.79	-	-	-7	-30.79	227	272	H
6	5.925	-84.1	RMS	35	-22.6	11.8	10	-49.9	-27	-22.9	-	-	227	272	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

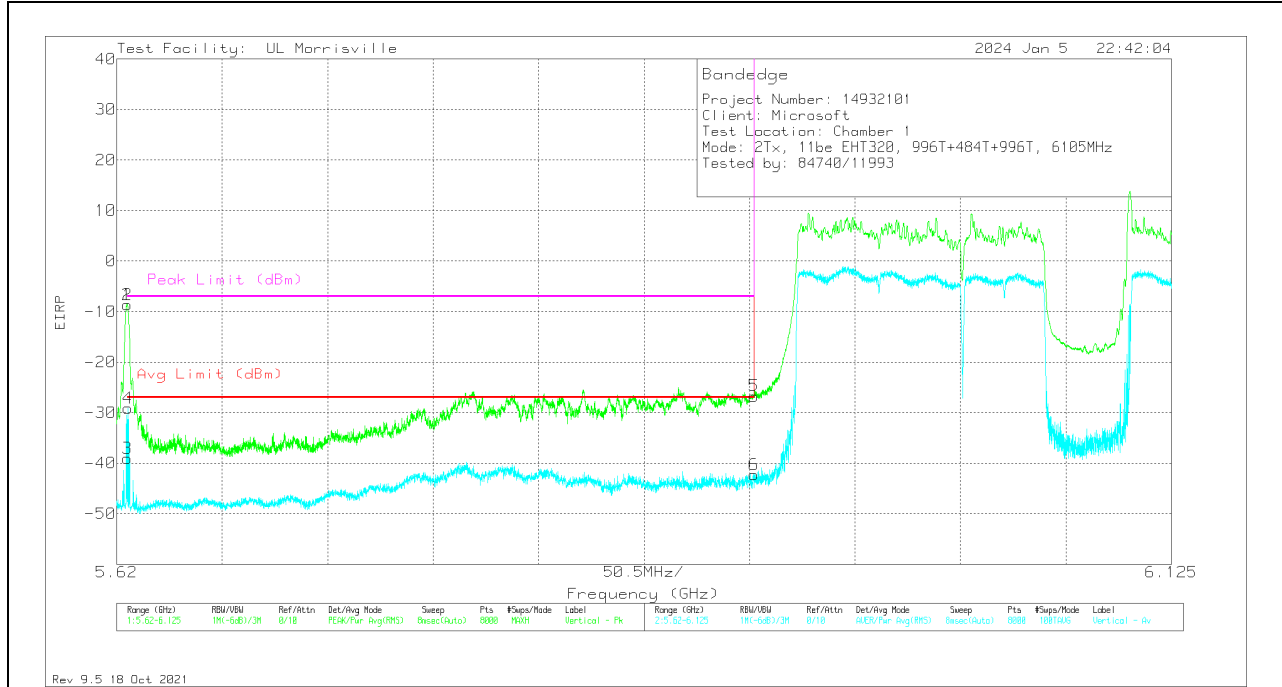


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	10dB Pad	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.62505	-41.86	Pk	34.4	-23	11.8	10	-8.66	-	-	-7	-1.66	304	220	V
3	5.62505	-72.24	RMS	34.4	-23	11.8	10	-39.04	-27	-12.04	-	-	304	220	V
2	5.62518	-41.89	Pk	34.4	-23	11.8	10	-8.69	-	-	-7	-1.69	304	220	V
4	5.62549	-62.29	RMS	34.4	-23	11.8	10	-29.09	-27	-2.09	-	-	304	220	V
5	5.925	-60.9	Pk	35	-22.6	11.8	10	-26.7	-	-	-7	-19.7	304	220	V
6	5.925	-76.52	RMS	35	-22.6	11.8	10	-42.32	-27	-15.32	-	-	304	220	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

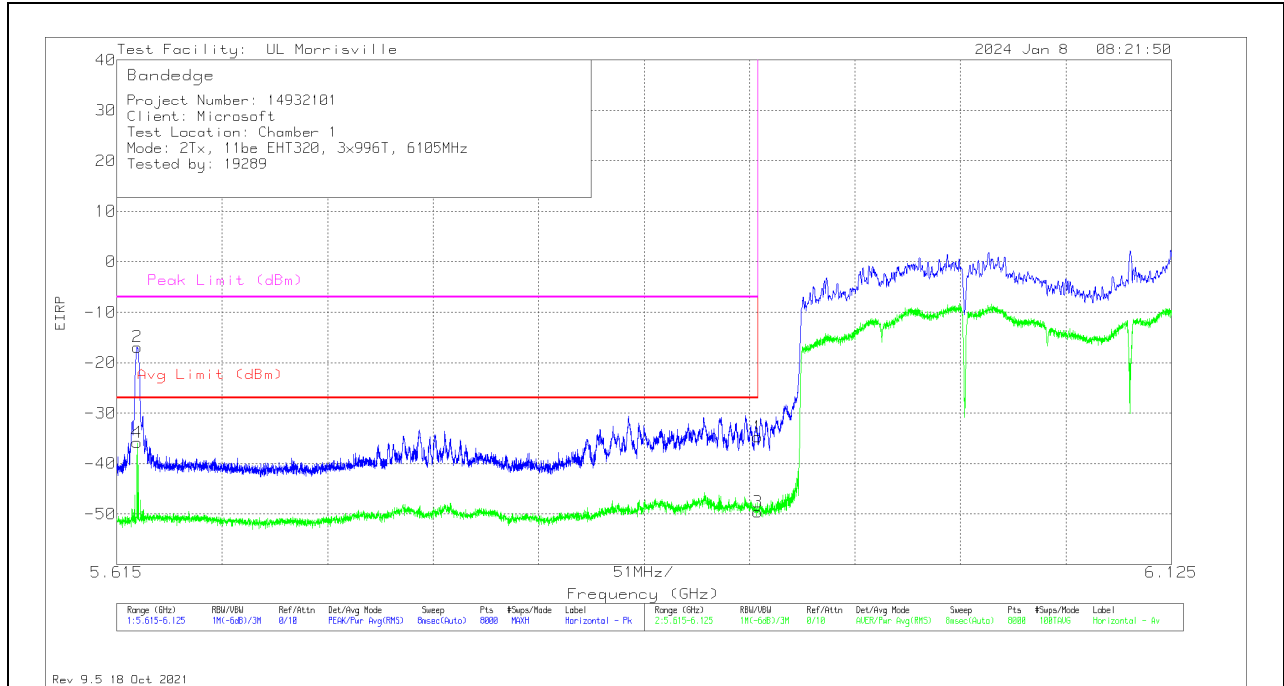

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62482	-69.17	RMS	34.4	-23	11.8	10	.17	-35.8	-27	-8.8	-	-	254	387	H
2	5.62488	-50.09	Pk	34.4	-23	11.8	10	0	-16.89	-	-	-7	-9.89	254	387	H
1	5.92499	-68.86	Pk	35	-22.6	11.8	10	0	-34.66	-	-	-7	-27.66	254	387	H
3	5.92499	-83.96	RMS	35	-22.6	11.8	10	.17	-49.59	-27	-22.59	-	-	254	387	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

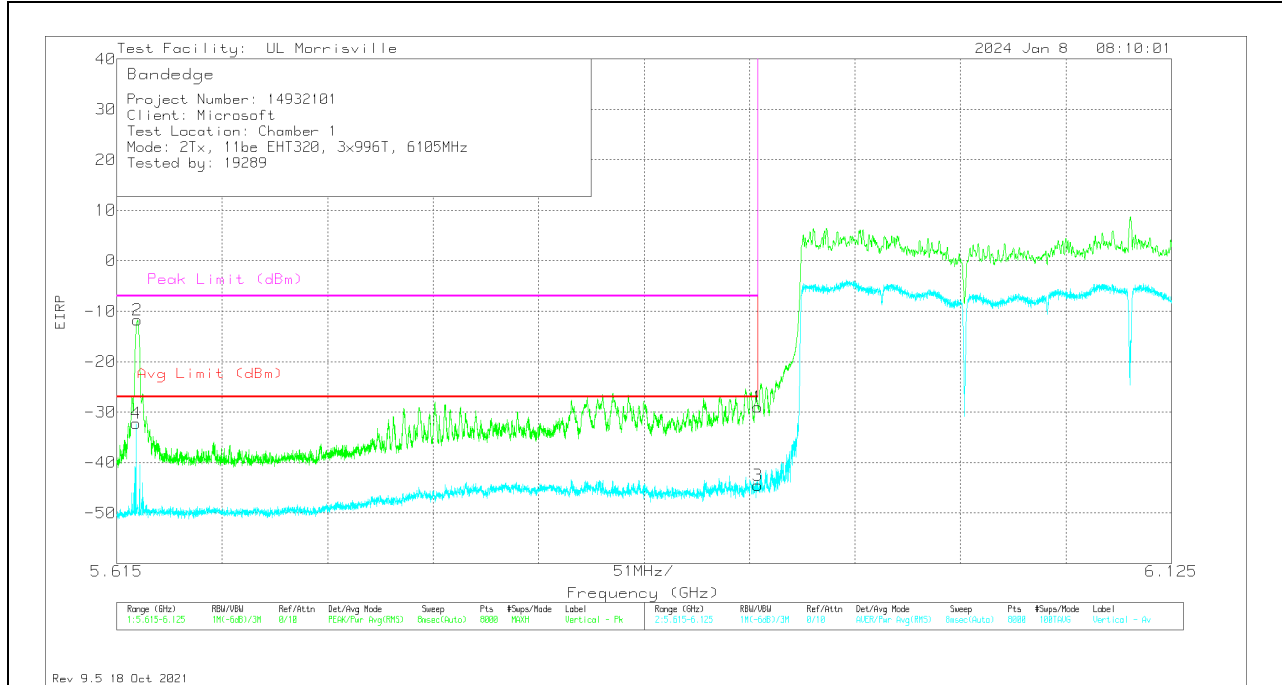


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62437	-65.45	RMS	34.4	-23	11.8	9.9	.17	-32.18	-27	-5.18	-	-	306	270	V
2	5.62501	-44.94	Pk	34.4	-23	11.8	10	0	-11.74	-	-	-7	-4.74	306	270	V
1	5.92499	-63.24	Pk	35	-22.6	11.8	10	0	-29.04	-	-	-7	-22.04	306	270	V
3	5.92499	-78.85	RMS	35	-22.6	11.8	10	.17	-44.48	-27	-17.48	-	-	306	270	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

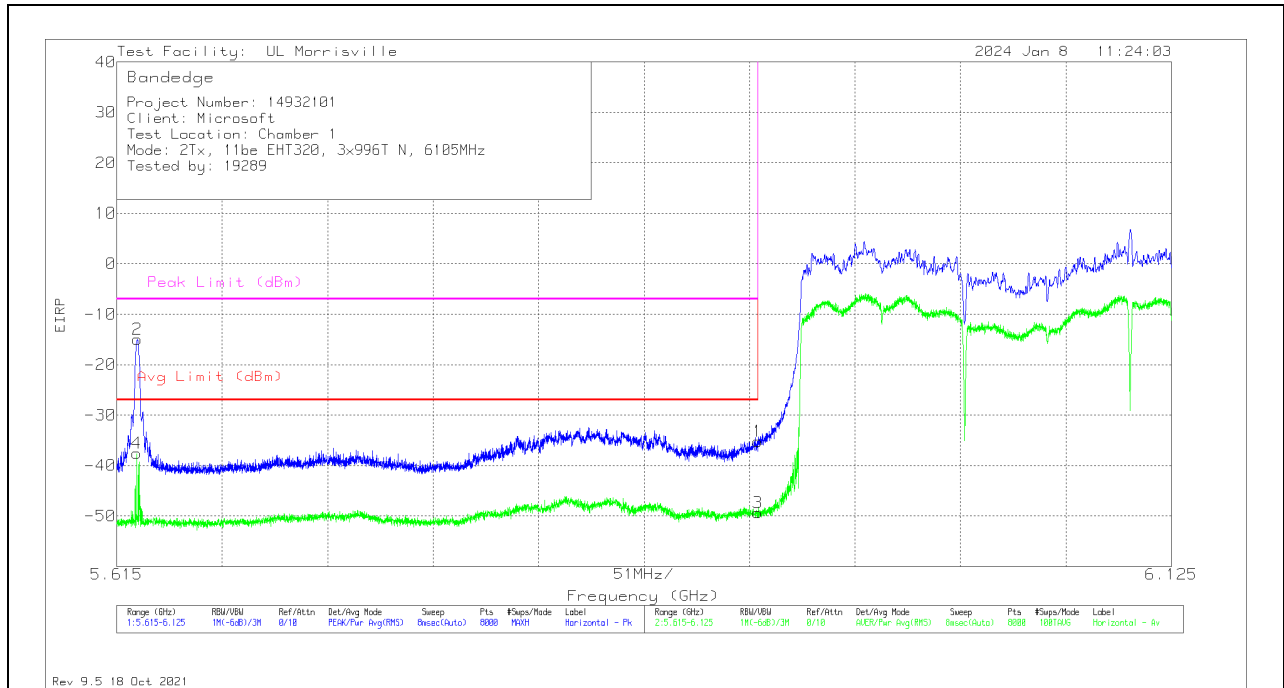

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62463	-70.94	RMS	34.4	-23	11.8	10	.17	-37.57	-27	-10.57	-	-	259	395	H
2	5.62501	-48.2	Pk	34.4	-23	11.8	10	0	-15	-	-	-7	-8	259	395	H
1	5.92499	-69.39	Pk	35	-22.6	11.8	10	0	-35.19	-	-	-7	-28.19	259	395	H
3	5.92499	-83.72	RMS	35	-22.6	11.8	10	.17	-49.35	-27	-22.35	-	-	259	395	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

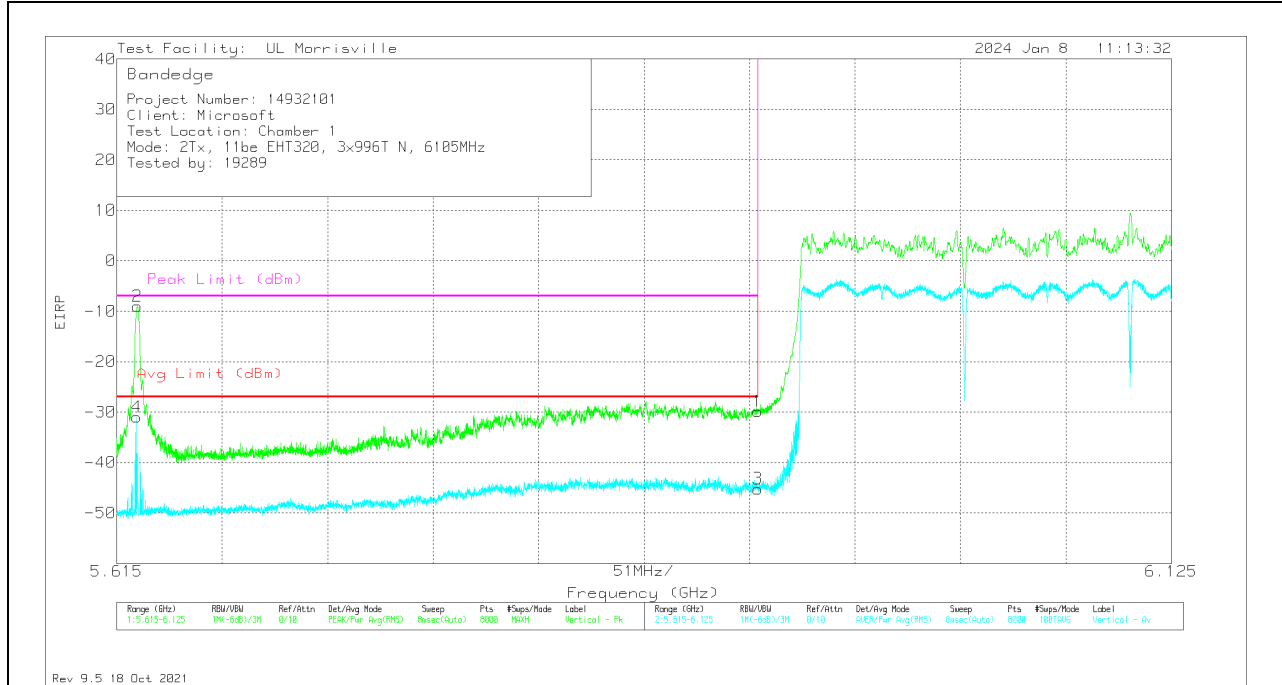


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62476	-64.33	RMS	34.4	-23	11.8	10	.17	-30.96	-27	-3.96	-	-	310	253	V
2	5.62495	-42.24	Pk	34.4	-23	11.8	10	0	-9.04	-	-	-7	-2.04	310	253	V
1	5.92499	-64.11	Pk	35	-22.6	11.8	10	0	-29.91	-	-	-7	-22.91	310	253	V
3	5.92499	-79.57	RMS	35	-22.6	11.8	10	.17	-45.2	-27	-18.2	-	-	310	253	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

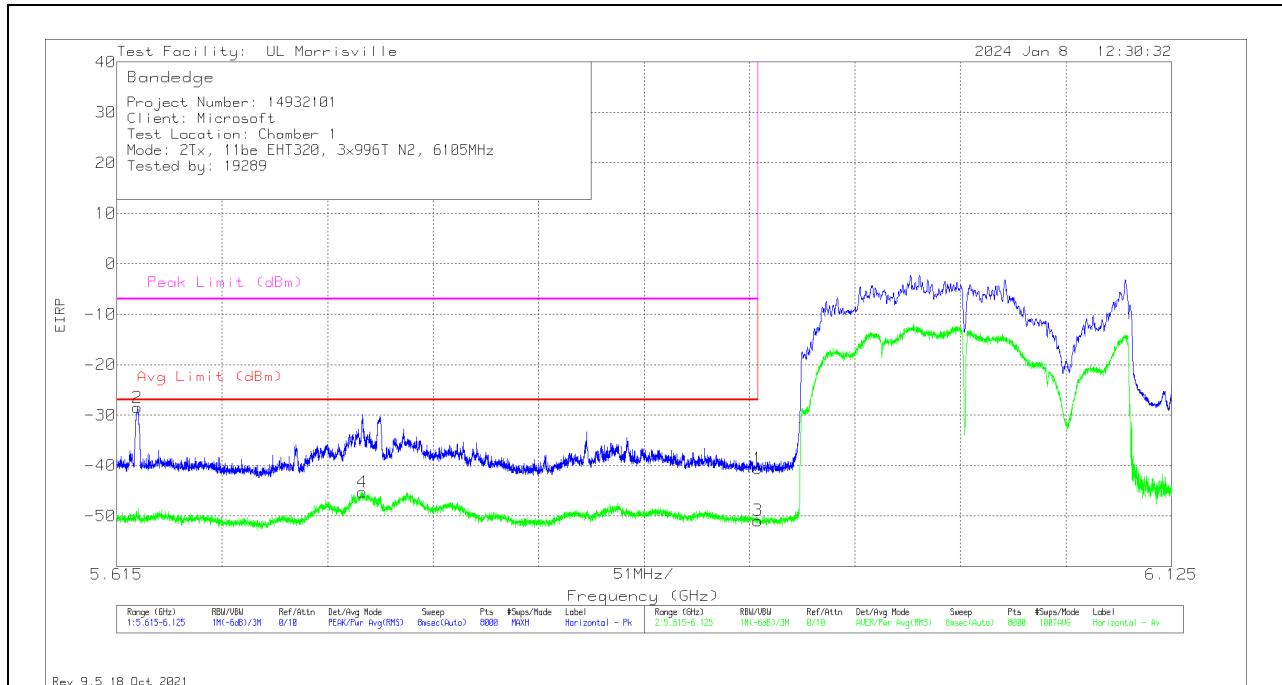

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62495	-61.68	Pk	34.4	-23	11.8	10	0	-28.48	-	-	-7	-21.48	219	398	H
4	5.73372	-78.66	RMS	34.5	-23	11.8	9.9	.17	-45.29	-27	-18.29	-	-	219	398	H
1	5.92499	-74.8	Pk	35	-22.6	11.8	10	0	-40.6	-	-	-7	-33.6	219	398	H
3	5.92499	-85.28	RMS	35	-22.6	11.8	10	.17	-50.91	-27	-23.91	-	-	219	398	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

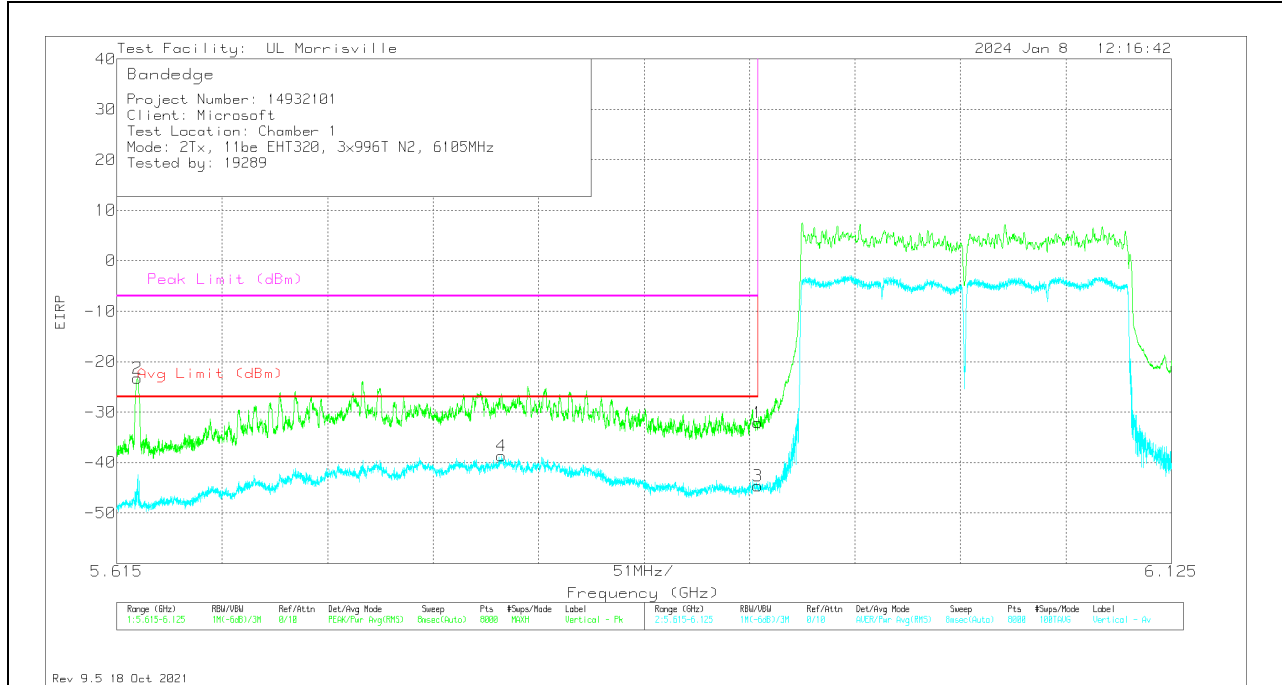


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62495	-56.43	Pk	34.4	-23	11.8	10	0	-23.23	-	-	-7	-16.23	306	219	V
4	5.80117	-72.39	RMS	34.7	-23	11.8	10	.17	-38.72	-27	-11.72	-	-	306	219	V
1	5.92499	-66.26	Pk	35	-22.6	11.8	10	0	-32.06	-	-	-7	-25.06	306	219	V
3	5.92499	-79	RMS	35	-22.6	11.8	10	.17	-44.63	-27	-17.63	-	-	306	219	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T+484T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

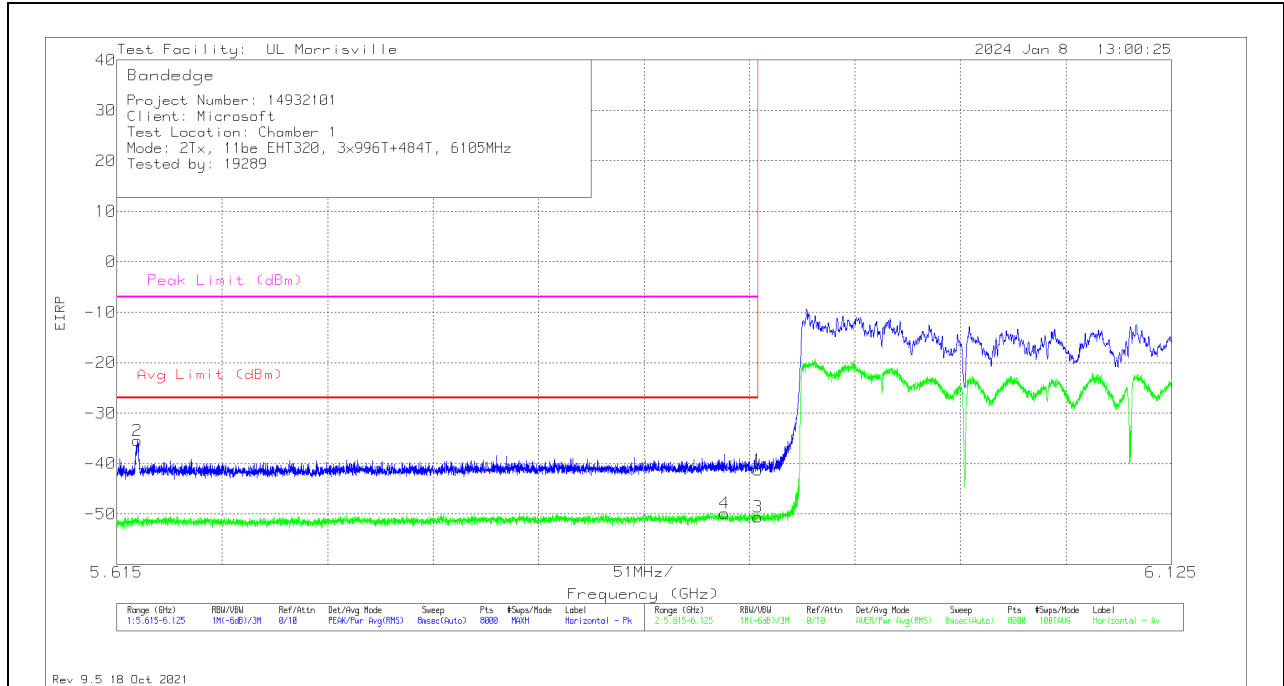

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62488	-68.63	Pk	34.4	-23	11.8	10	0	-35.43	-	-	-7	-28.43	341	115	H
4	5.9088	-84.21	RMS	35	-22.6	11.8	10	.18	-49.83	-27	-22.83	-	-	341	115	H
1	5.92499	-75.52	Pk	35	-22.6	11.8	10	0	-41.32	-	-	-7	-34.32	341	115	H
3	5.92499	-85.03	RMS	35	-22.6	11.8	10	.18	-50.65	-27	-23.65	-	-	341	115	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

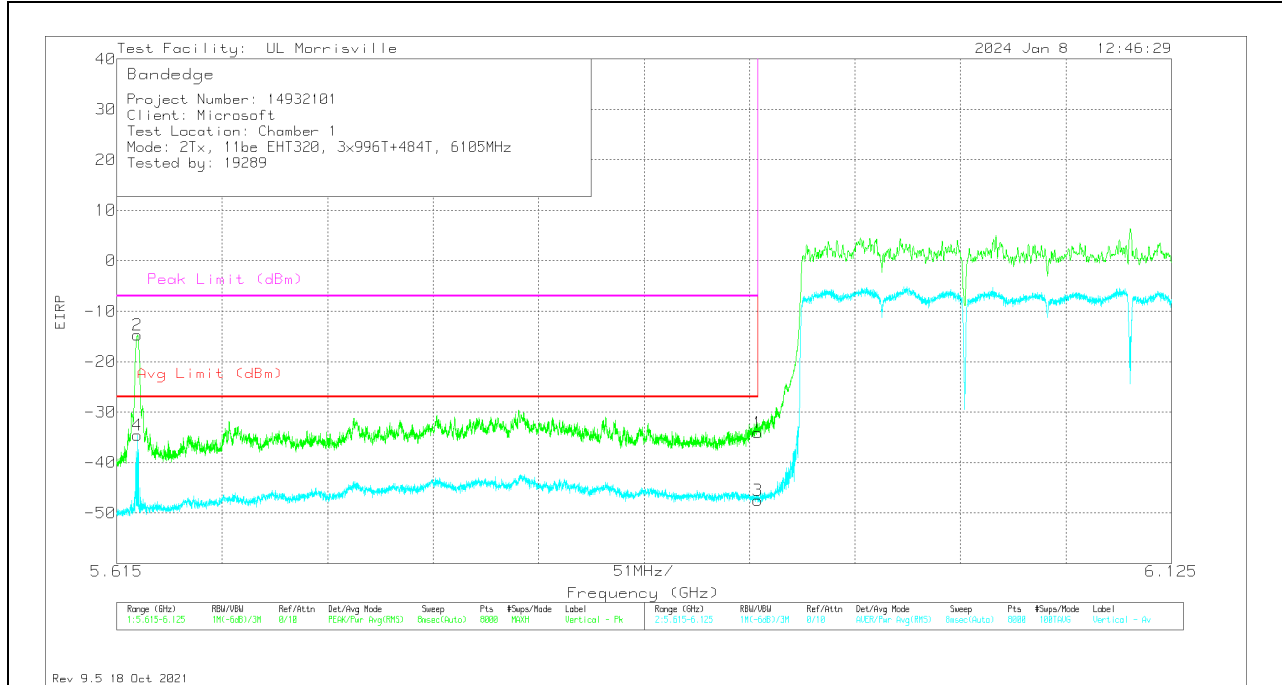


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62501	-47.88	Pk	34.4	-23	11.8	10	0	-14.68	-	-	-7	-7.68	299	209	V
4	5.62501	-67.91	RMS	34.4	-23	11.8	10	.18	-34.53	-27	-7.53	-	-	299	209	V
1	5.92499	-68.24	Pk	35	-22.6	11.8	10	0	-34.04	-	-	-7	-27.04	299	209	V
3	5.92499	-81.83	RMS	35	-22.6	11.8	10	.18	-47.45	-27	-20.45	-	-	299	209	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

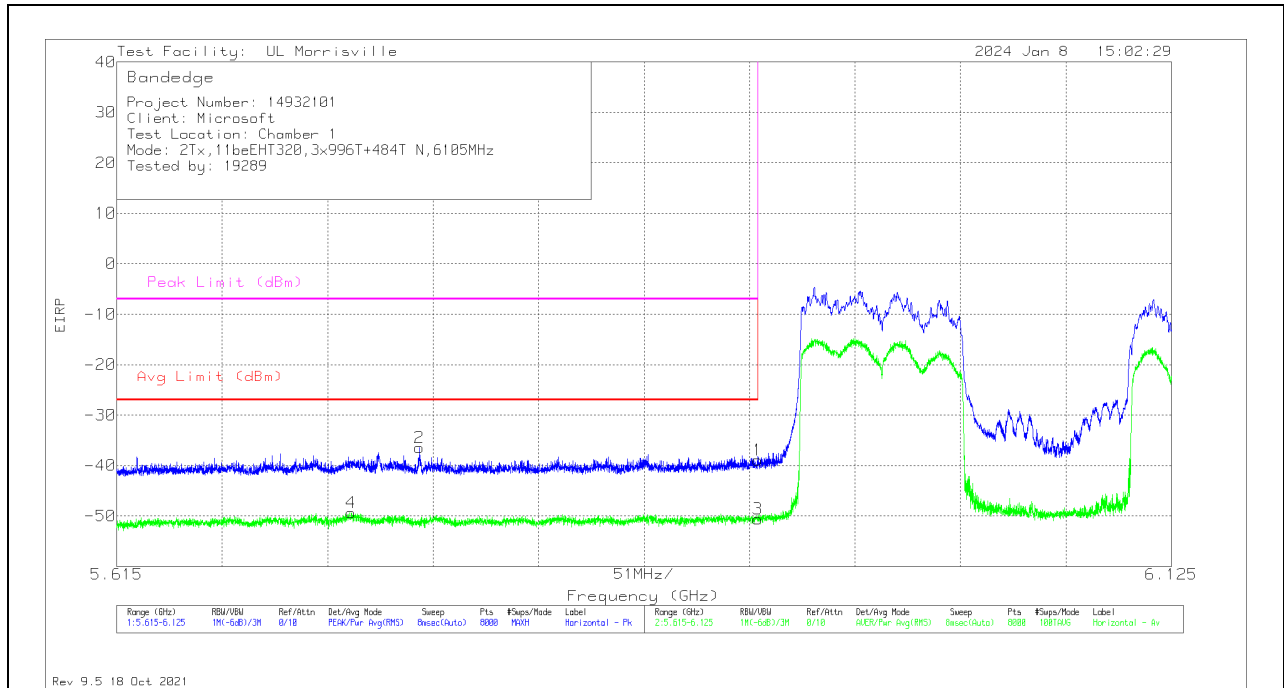

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.7283	-82.89	RMS	34.5	-22.9	11.8	10	.18	-49.31	-27	-22.31	-	-	12	268	H
2	5.76126	-69.62	Pk	34.6	-23.2	11.8	10	0	-36.42	-	-	-7	-29.42	12	268	H
1	5.92499	-73.15	Pk	35	-22.6	11.8	10	0	-38.95	-	-	-7	-31.95	12	268	H
3	5.92499	-85.02	RMS	35	-22.6	11.8	10	.18	-50.64	-27	-23.64	-	-	12	268	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

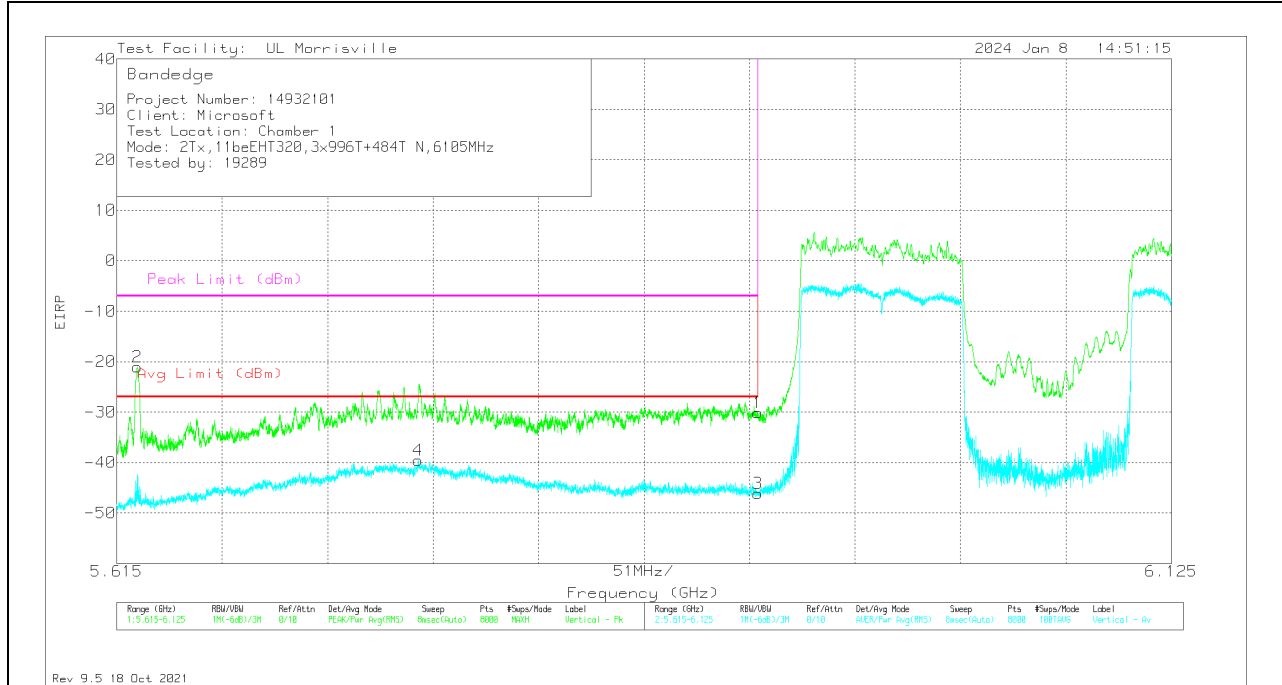


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62495	-54.22	Pk	34.4	-23	11.8	10	0	-21.02	-	-	-7	-14.02	302	272	V
4	5.76081	-72.95	RMS	34.6	-23.2	11.8	10	.18	-39.57	-27	-12.57	-	-	302	272	V
1	5.92499	-64.36	Pk	35	-22.6	11.8	10	0	-30.16	-	-	-7	-23.16	302	272	V
3	5.92499	-80.54	RMS	35	-22.6	11.8	10	.18	-46.16	-27	-19.16	-	-	302	272	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

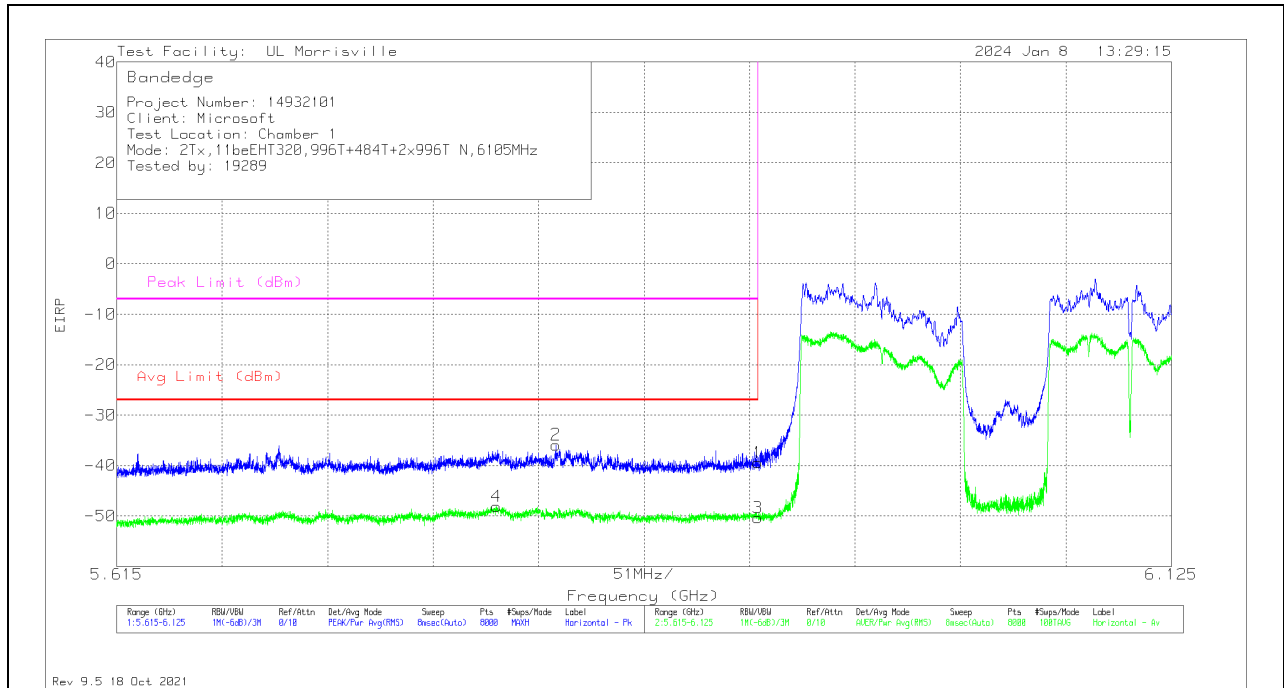

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.7985	-81.78	RMS	34.7	-23	11.8	10	.18	-48.1	-27	-21.1	-	-	286	381	H
2	5.82738	-69.59	Pk	34.8	-22.9	11.8	10	0	-35.89	-	-	-7	-28.89	286	381	H
1	5.92499	-73.66	Pk	35	-22.6	11.8	10	0	-39.46	-	-	-7	-32.46	286	381	H
3	5.92499	-84.69	RMS	35	-22.6	11.8	10	.18	-50.31	-27	-23.31	-	-	286	381	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

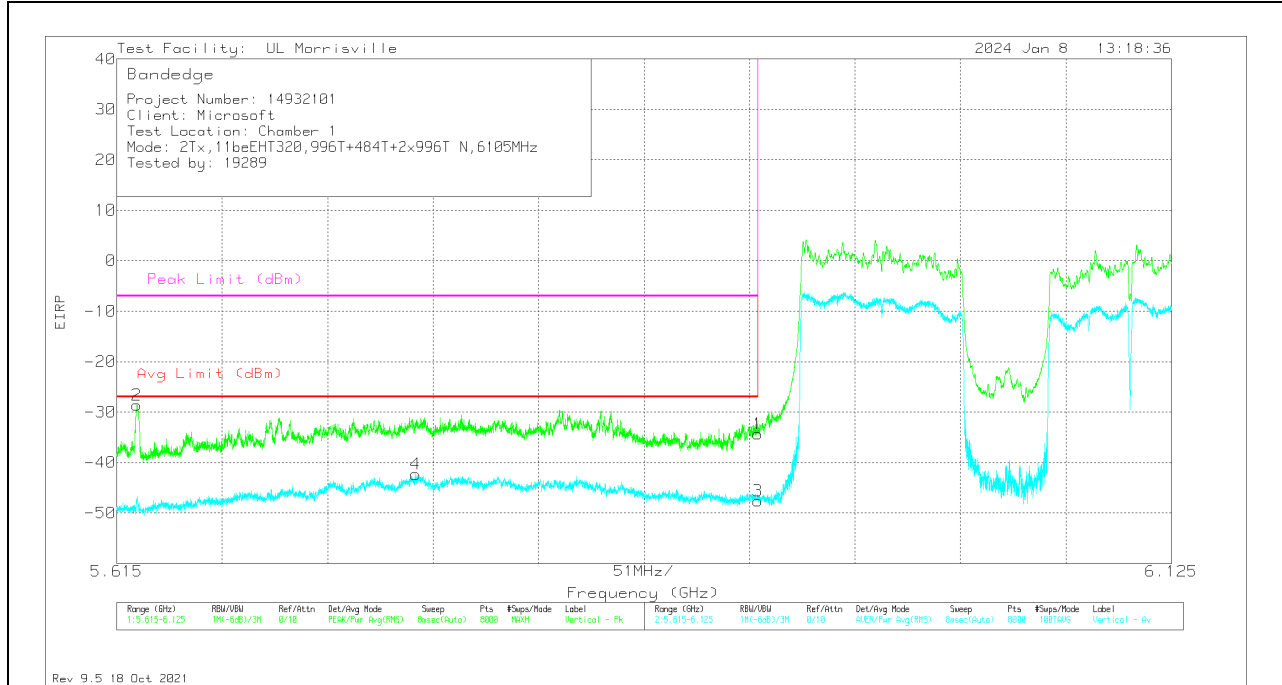


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62463	-61.85	Pk	34.4	-23	11.8	10	0	-28.65	-	-	-7	-21.65	290	246	V
4	5.7596	-75.72	RMS	34.6	-23.2	11.8	10	.18	-42.34	-27	-15.34	-	-	290	246	V
1	5.92499	-68.56	Pk	35	-22.6	11.8	10	0	-34.36	-	-	-7	-27.36	290	246	V
3	5.92499	-81.97	RMS	35	-22.6	11.8	10	.18	-47.59	-27	-20.59	-	-	290	246	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

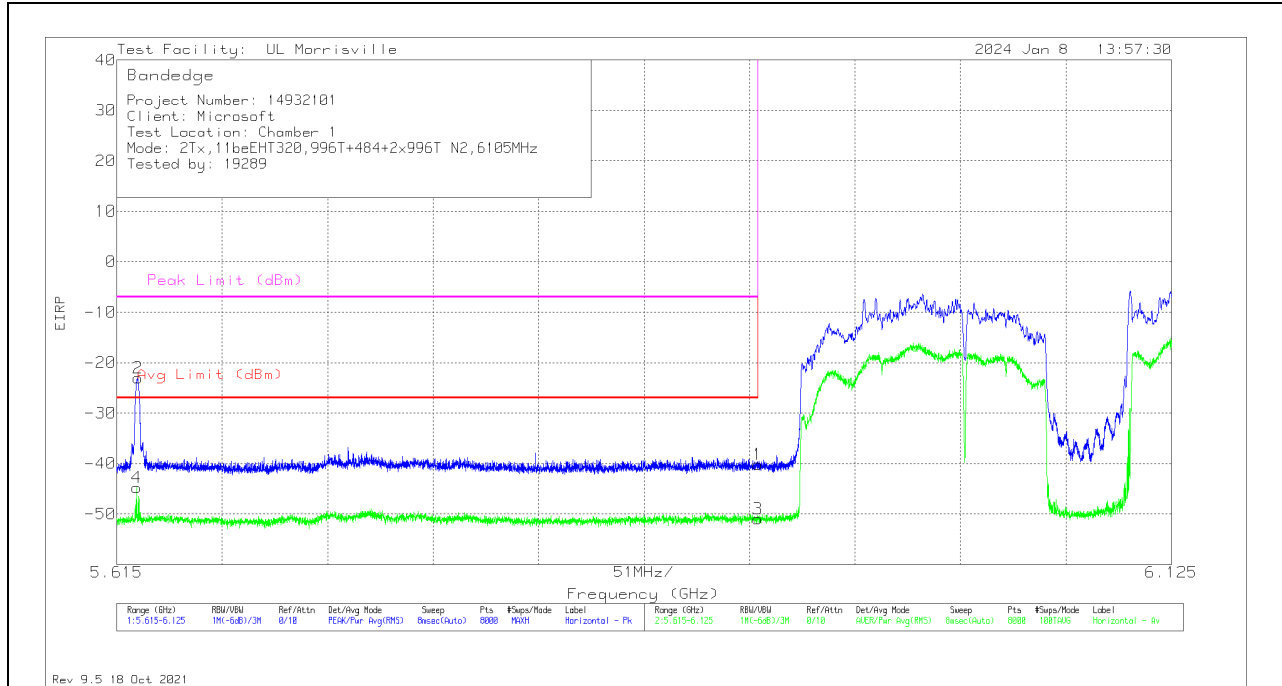

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62469	-78.1	RMS	34.4	-23	11.8	10	.18	-44.72	-27	-17.72	-	-	228	374	H
2	5.62514	-56.22	Pk	34.4	-23	11.8	10	0	-23.02	-	-	-7	-16.02	228	374	H
1	5.92499	-74.38	Pk	35	-22.6	11.8	10	0	-40.18	-	-	-7	-33.18	228	374	H
3	5.92499	-85.37	RMS	35	-22.6	11.8	10	.18	-50.99	-27	-23.99	-	-	228	374	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

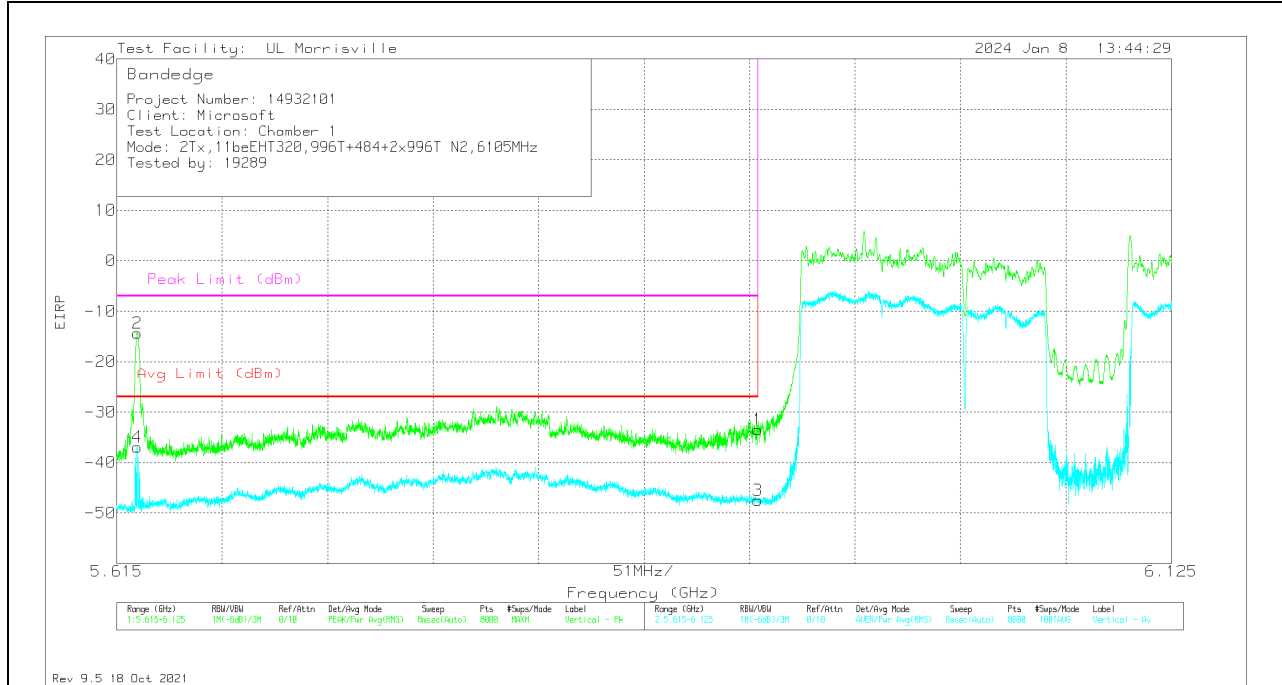


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62488	-47.54	Pk	34.4	-23	11.8	10	0	-14.34	-	-	-7	-7.34	296	256	V
4	5.62501	-70.3	RMS	34.4	-23	11.8	10	.18	-36.92	-27	-9.92	-	-	296	255	V
1	5.92499	-67.66	Pk	35	-22.6	11.8	10	0	-33.46	-	-	-7	-26.46	296	256	V
3	5.92499	-81.89	RMS	35	-22.6	11.8	10	.18	-47.51	-27	-20.51	-	-	296	255	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

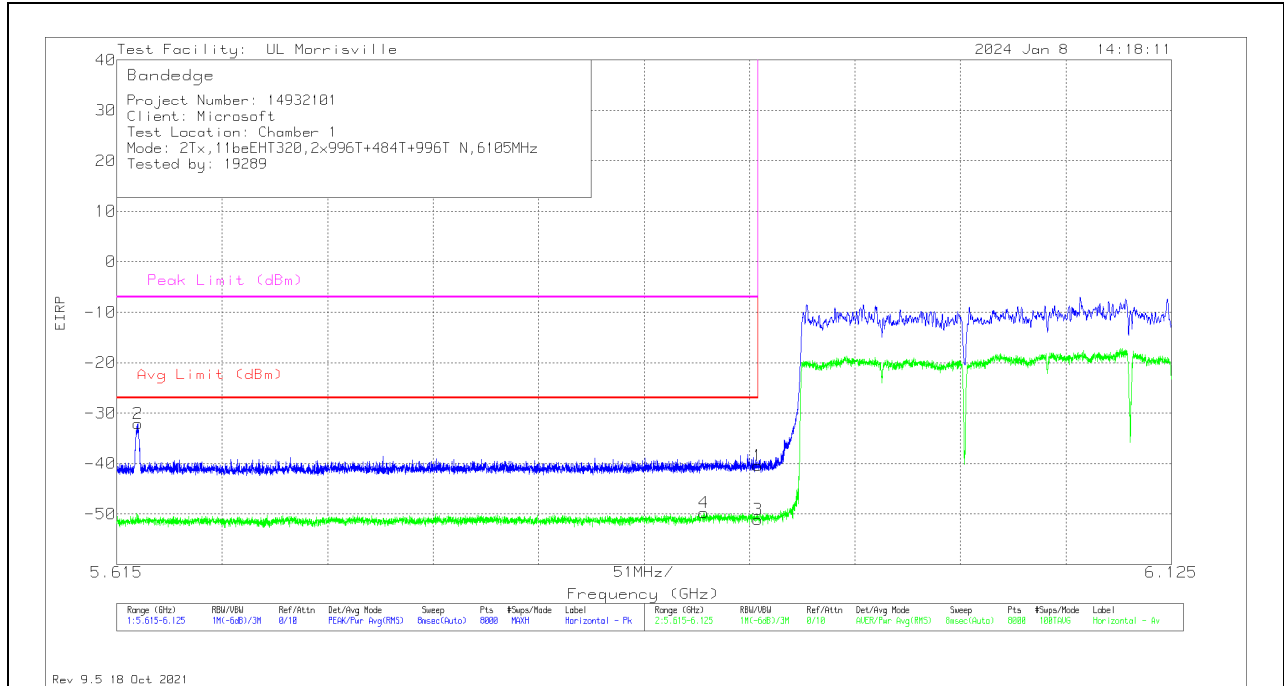

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62514	-65.32	Pk	34.4	-23	11.8	10	0	-32.12	-	-	-7	-25.12	351	115	H
4	5.89904	-83.98	RMS	34.9	-22.6	11.8	10	.18	-49.7	-27	-22.7	-	-	351	115	H
1	5.92499	-74.67	Pk	35	-22.6	11.8	10	0	-40.47	-	-	-7	-33.47	351	115	H
3	5.92499	-85.52	RMS	35	-22.6	11.8	10	.18	-51.14	-27	-24.14	-	-	351	115	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

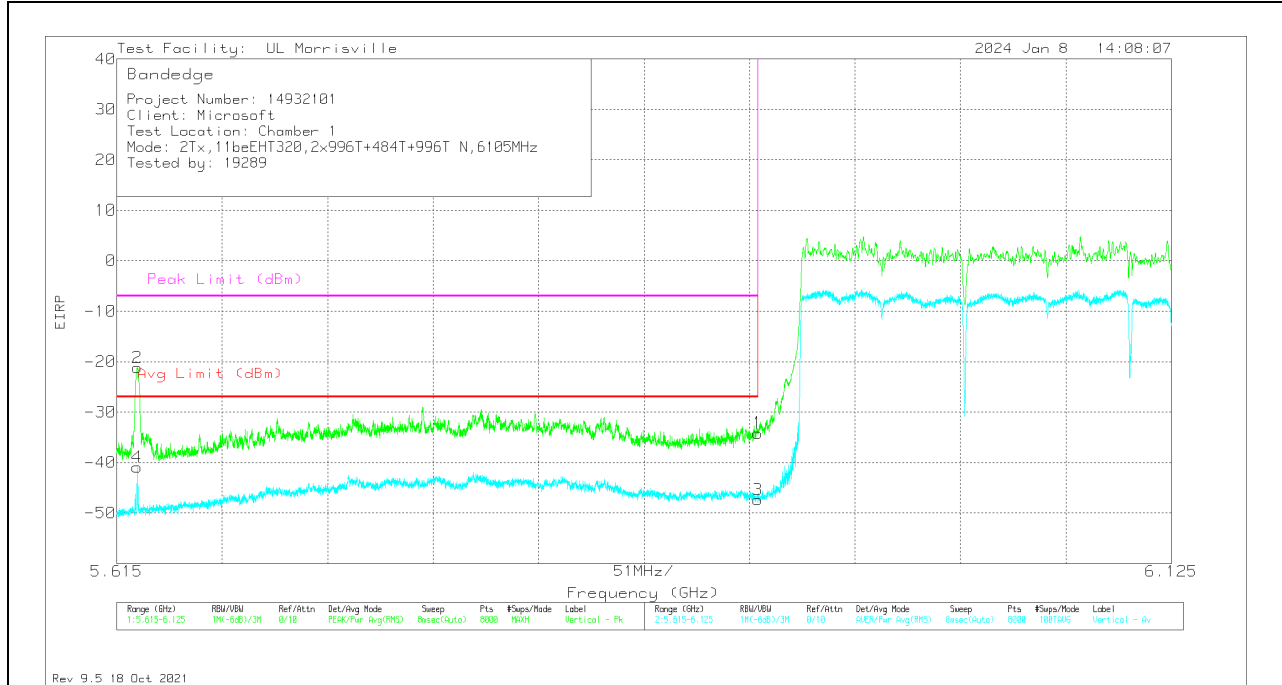


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62482	-74.29	RMS	34.4	-23	11.8	10	.18	-40.91	-27	-13.91	-	-	300	202	V
2	5.62495	-54.43	Pk	34.4	-23	11.8	10	0	-21.23	-	-	-7	-14.23	300	202	V
1	5.92499	-68.35	Pk	35	-22.6	11.8	10	0	-34.15	-	-	-7	-27.15	300	202	V
3	5.92499	-81.73	RMS	35	-22.6	11.8	10	.18	-47.35	-27	-20.35	-	-	300	202	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

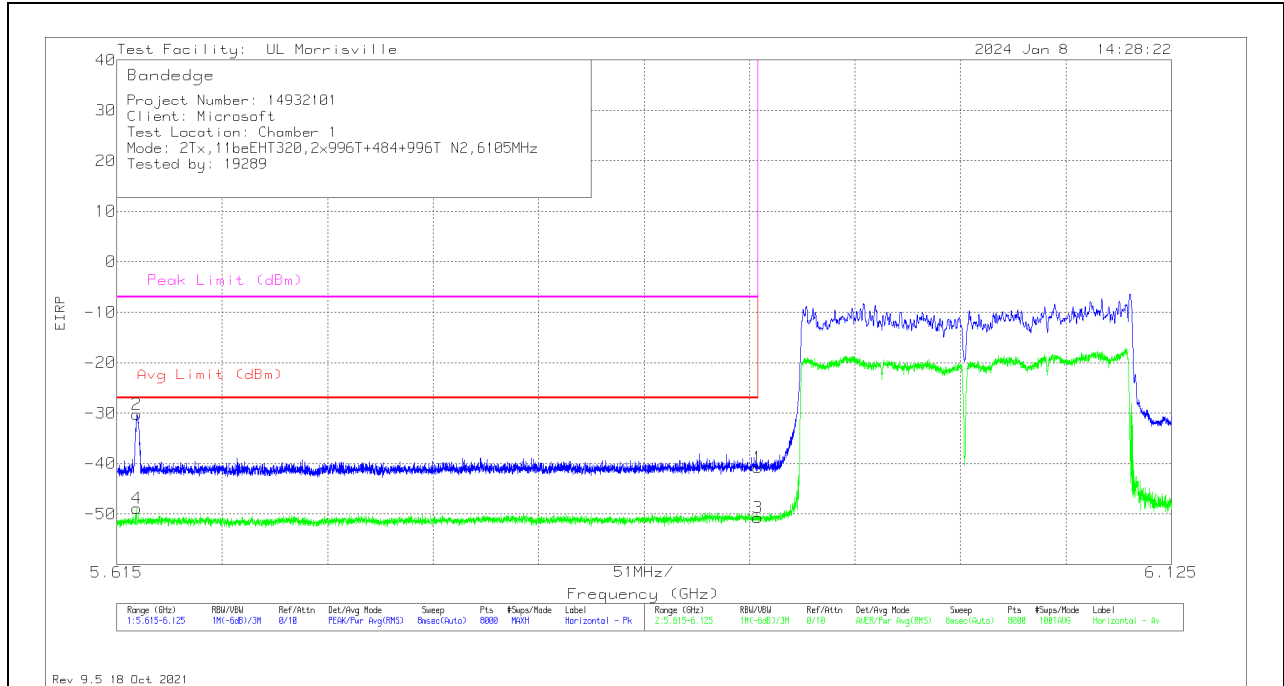

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62469	-82.28	RMS	34.4	-23	11.8	10	.18	-48.9	-27	-21.9	-	-	350	115	H
2	5.62476	-63.4	Pk	34.4	-23	11.8	10	0	-30.2	-	-	-7	-23.2	350	115	H
1	5.92499	-74.97	Pk	35	-22.6	11.8	10	0	-40.77	-	-	-7	-33.77	350	115	H
3	5.92499	-85.15	RMS	35	-22.6	11.8	10	.18	-50.77	-27	-23.77	-	-	350	115	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

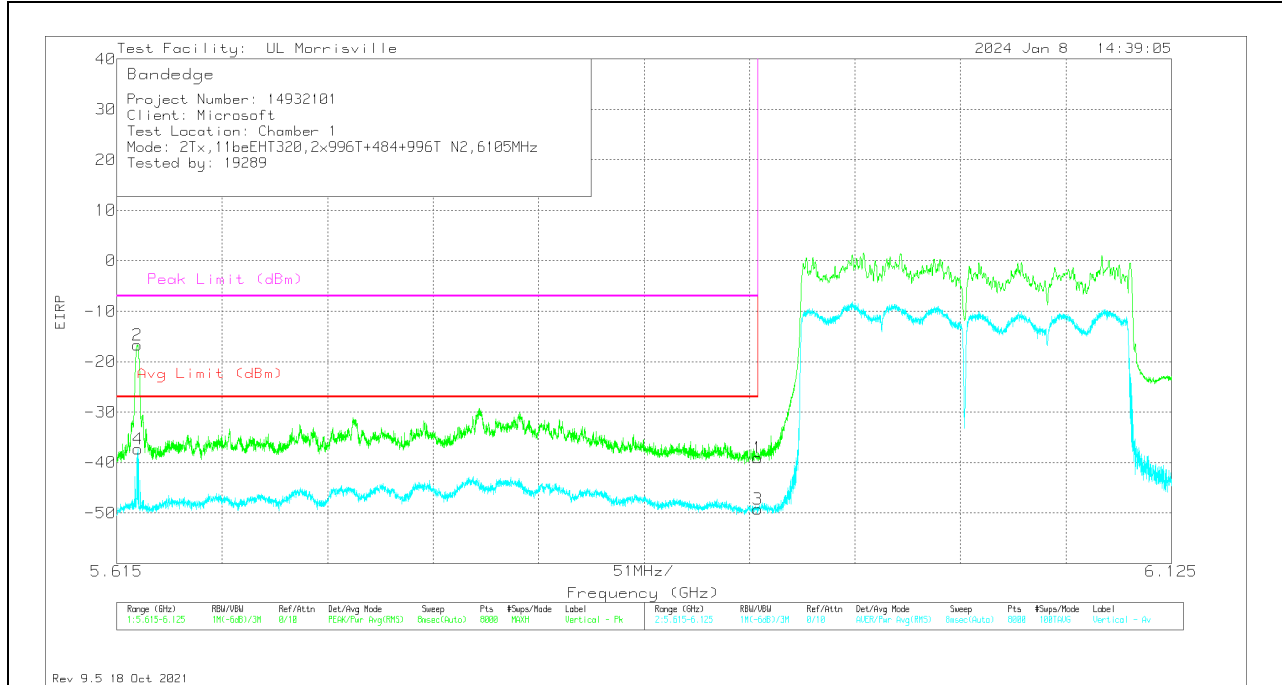


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62501	-49.89	Pk	34.4	-23	11.8	10	0	-16.69	-	-	-7	-9.69	285	221	V
4	5.62533	-70.75	RMS	34.4	-23	11.8	10	.18	-37.37	-27	-10.37	-	-	285	221	V
1	5.92499	-73.3	Pk	35	-22.6	11.8	10	0	-39.1	-	-	-7	-32.1	285	221	V
3	5.92499	-83.63	RMS	35	-22.6	11.8	10	.18	-49.25	-27	-22.25	-	-	285	221	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: SU

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

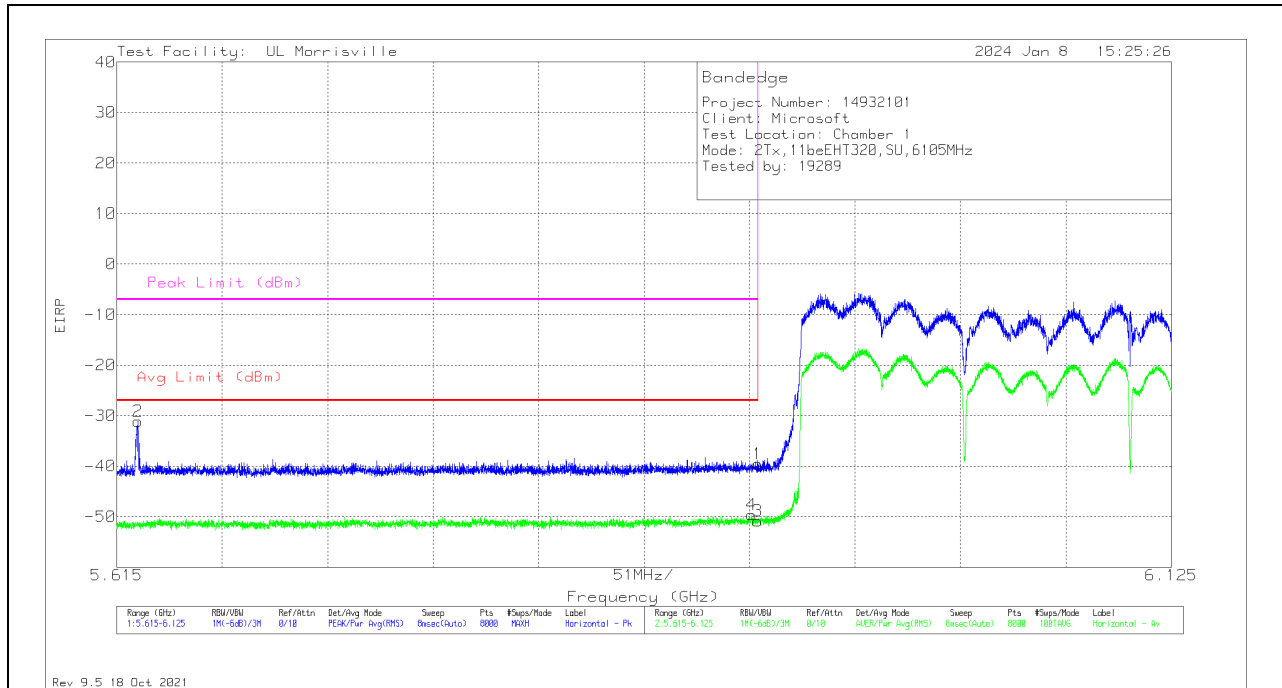

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62514	-64.36	Pk	34.4	-23	11.8	10	0	-31.16	-	-	-7	-24.16	9	269	H
4	5.9218	-83.96	RMS	35	-22.6	11.8	10	.11	-49.65	-27	-22.65	-	-	9	269	H
1	5.92499	-73.77	Pk	35	-22.6	11.8	10	0	-39.57	-	-	-7	-32.57	9	269	H
3	5.92499	-85.21	RMS	35	-22.6	11.8	10	.11	-50.9	-27	-23.9	-	-	9	269	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

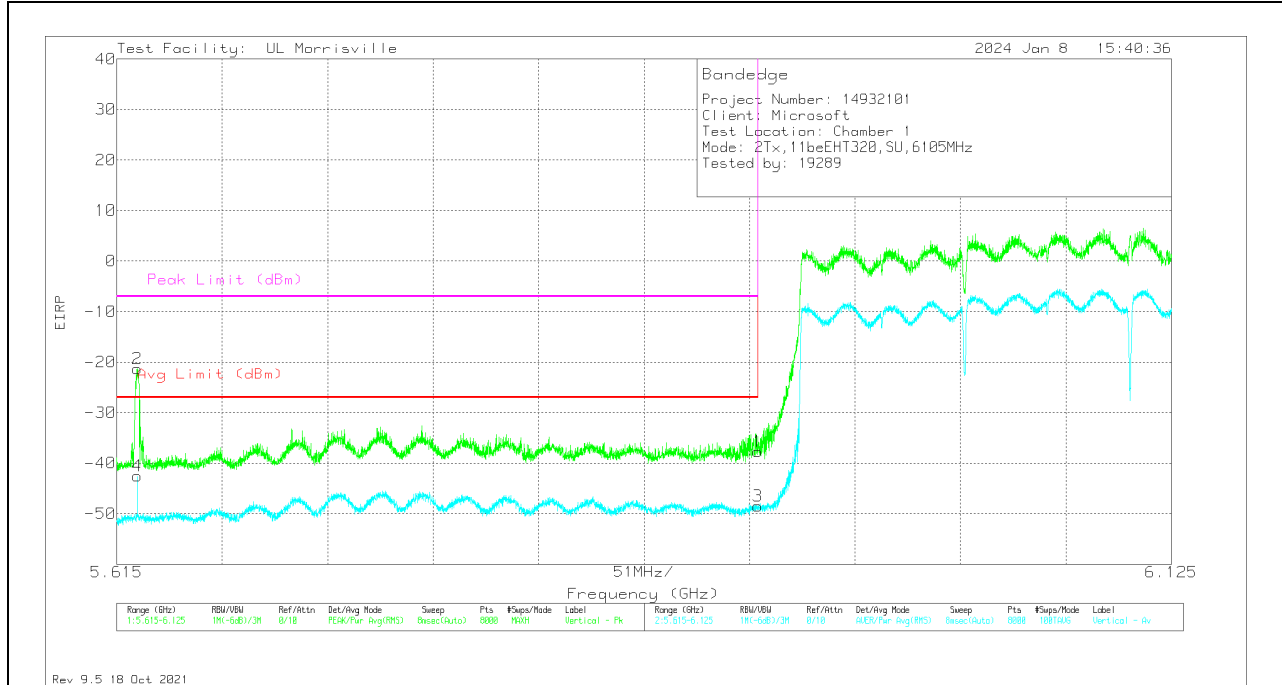

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62501	-75.83	RMS	34.4	-23	11.8	10	.11	-42.52	-27	-15.52	-	-	320	224	V
2	5.62507	-54.53	Pk	34.4	-23	11.8	10	0	-21.33	-	-	-7	-14.33	320	224	V
1	5.92499	-71.91	Pk	35	-22.6	11.8	10	0	-37.71	-	-	-7	-30.71	320	224	V
3	5.92499	-82.75	RMS	35	-22.6	11.8	10	.11	-48.44	-27	-21.44	-	-	320	224	V



Pk - Peak detector
 RMS - RMS detection

10.1.7. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE UNII-6 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 26T

HARMONICS AND SPURIOUS EMISSIONS

LOW

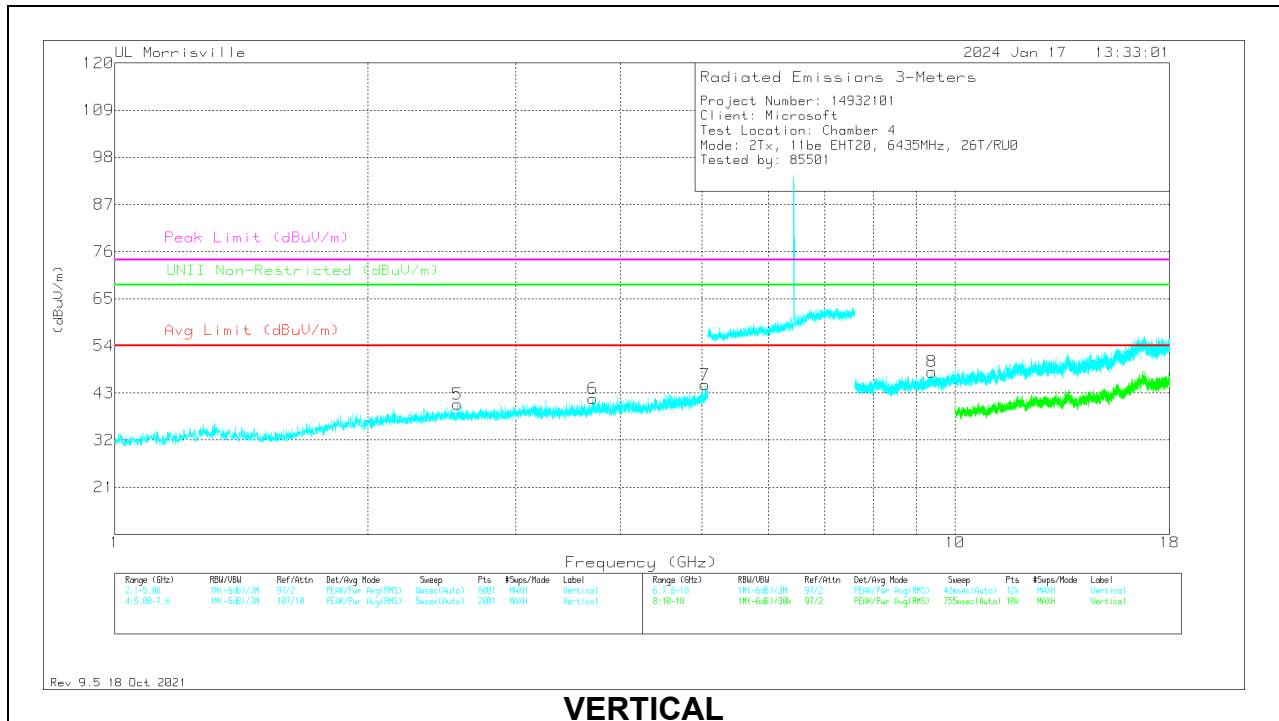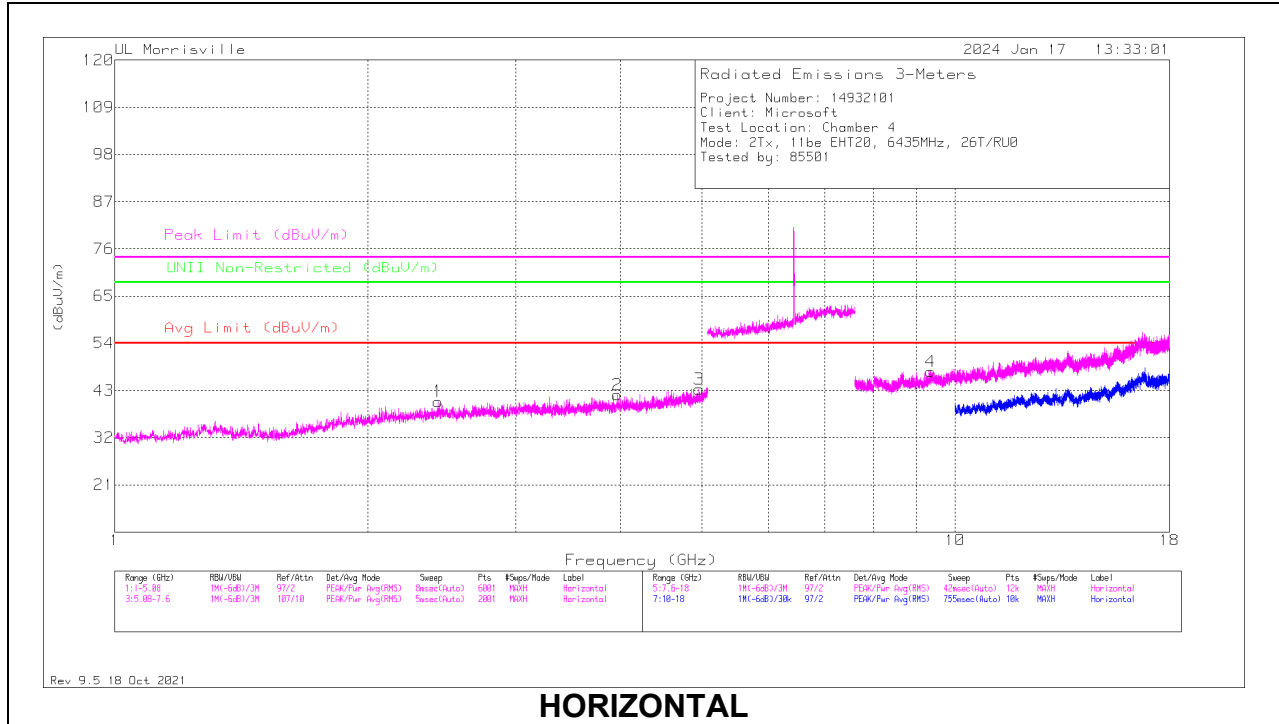

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 3.96276	41.11	Pk	33.4	-32.5	0	42.01	54	-11.99	74	-31.99	-	-	0-360	100	H
3	*** 4.95964	39.88	Pk	33.9	-30.5	0	43.28	54	-10.72	74	-30.72	-	-	0-360	100	H
5	** 2.5572	43.4	Pk	32.5	-35.5	0	40.4	54	-13.6	-	-	68.2	-27.8	0-360	200	V
6	*** 3.7064	42	Pk	33.1	-33.4	0	41.7	54	-12.3	74	-32.3	-	-	0-360	200	V
7	*** 5.03988	40.45	Pk	34.1	-29.7	0	44.85	54	-9.15	74	-29.15	-	-	0-360	200	V
1	2.42596	43.95	Pk	32.2	-35.7	0	40.45	-	-	-	-	68.2	-27.75	0-360	100	H
4	*** 9.36107	36.13	Pk	36.5	-25.6	.4	47.43	54	-6.57	74	-26.57	-	-	0-360	100	H
8	*** 9.38187	36.51	Pk	36.6	-25.7	.5	47.91	54	-6.09	74	-26.09	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

MID

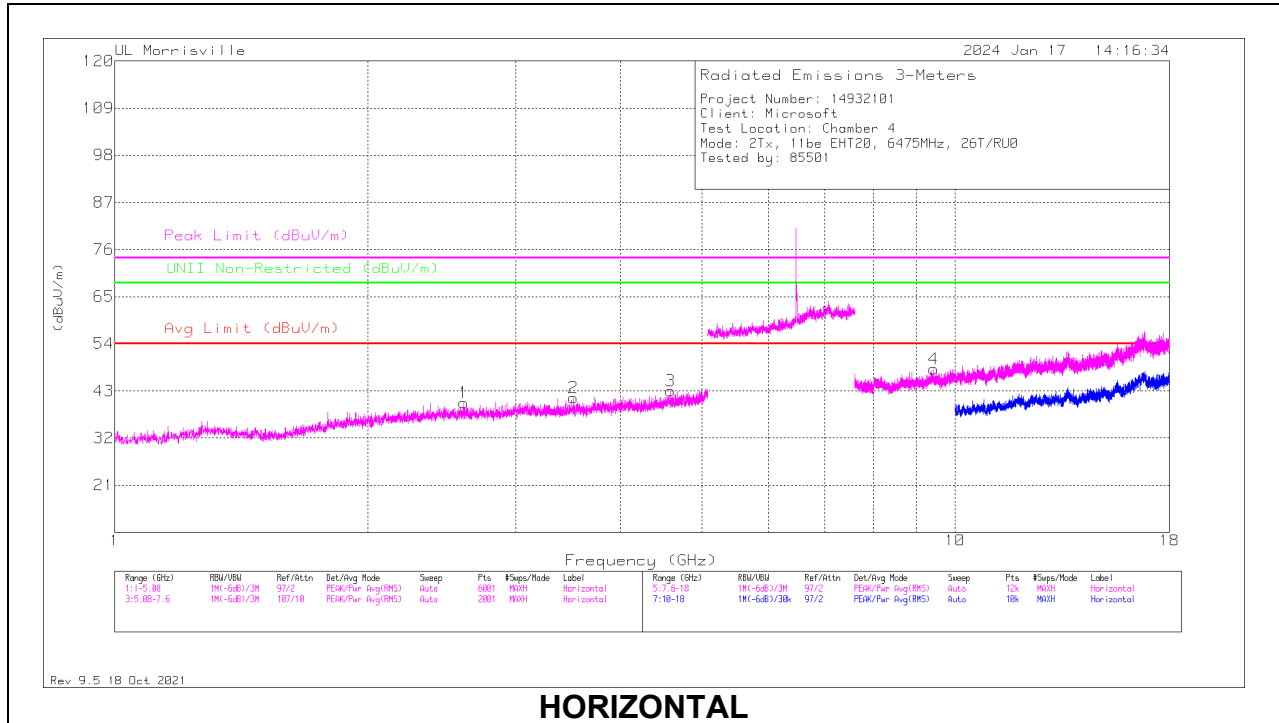

HORIZONTAL

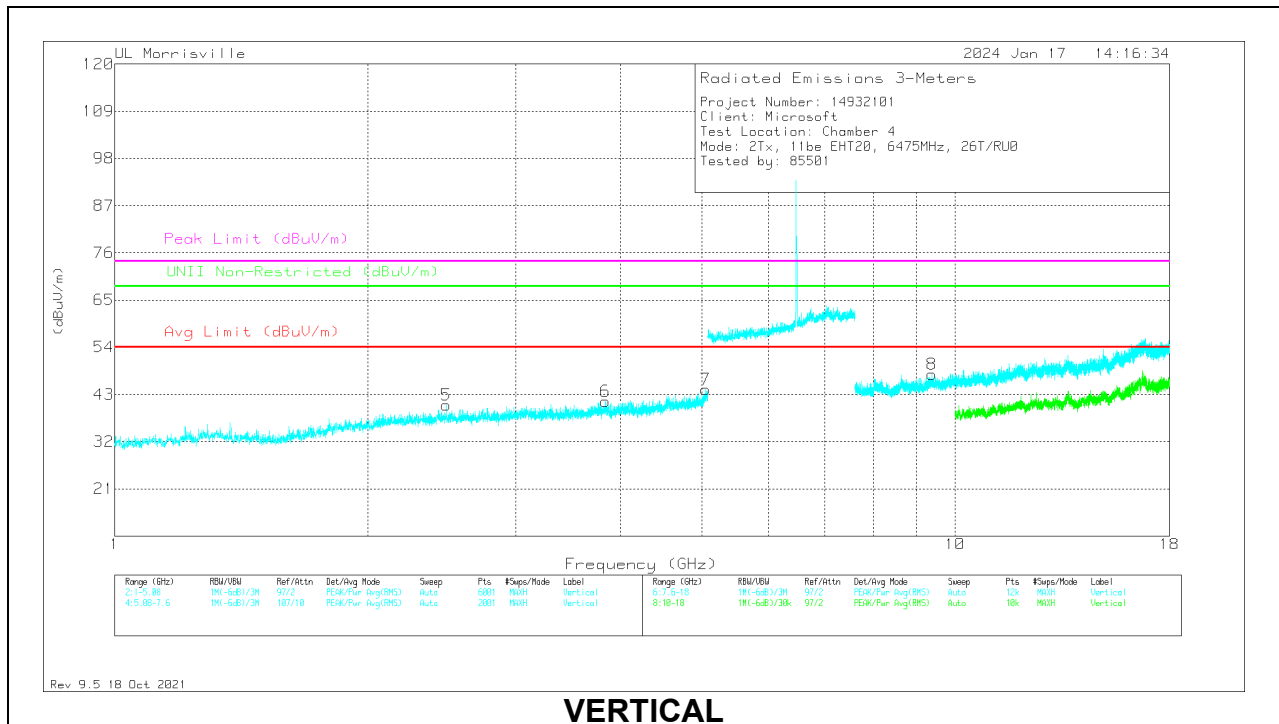

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 2.60412	43.01	Pk	32.6	-35.4	0	40.21	54	-13.79	-	-	68.2	-27.99	0-360	100	H
2	*** 3.51328	42.63	Pk	32.9	-34.1	0	41.43	54	-12.57	74	-32.57	-	-	0-360	100	H
3	*** 4.58564	40.04	Pk	34	-31	0	43.04	54	-10.96	74	-30.96	-	-	0-360	100	H
6	*** 3.83424	40.65	Pk	33.4	-32.6	0	41.45	54	-12.55	74	-32.55	-	-	0-360	200	V
7	*** 5.05076	39.31	Pk	34.1	-29.2	0	44.21	54	-9.79	74	-29.79	-	-	0-360	200	V
5	2.47968	43.86	Pk	32.3	-35.6	0	40.56	54	-13.44	-	-	68.2	-27.64	0-360	200	V
8	*** 9.3862	36.42	Pk	36.6	-25.9	.5	47.62	54	-6.38	74	-26.38	-	-	0-360	200	V
4	*** 9.43387	37.72	PK-U	36.7	-26.2	.4	48.62	-	-	74	-25.38	-	-	109	159	H
	*** 9.43135	25.83	ADR	36.7	-26.1	.4	36.83	54	-17.17	-	-	-	-	109	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK-U - Maximum Peak

ADR - RMS average