


### VERTICAL RESULT

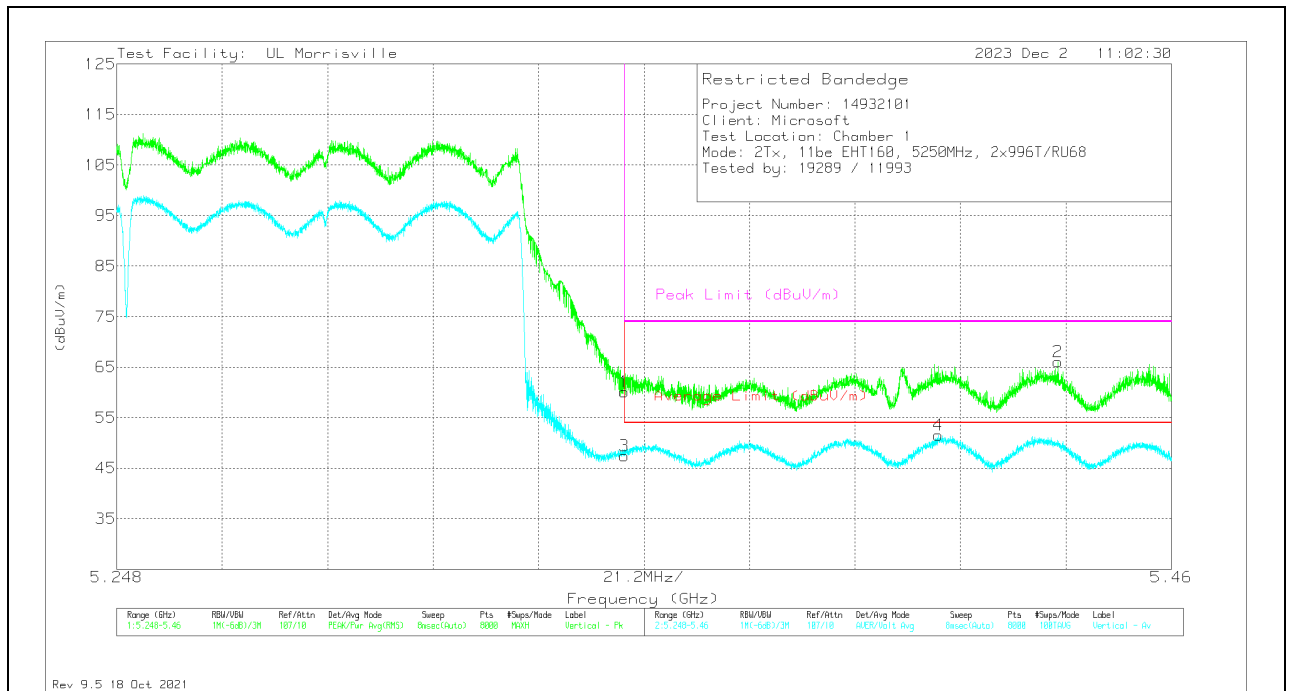

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	38.33	Pk	34.5	-22.7	10	60.13	-	-	74	-13.87	356	266	V
2	* ** 5.43723	44.88	Pk	34.4	-23.2	10	66.08	-	-	74	-7.92	356	266	V
3	* ** 5.35001	25.67	ADV	34.5	-22.7	10	47.47	54	-6.53	-	-	356	266	V
4	* ** 5.41311	30.21	ADV	34.5	-23.2	10	51.51	54	-2.49	-	-	356	266	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


ADV - Linear Voltage Average

**11.1.17. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND**

**2TX CDD MODE**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

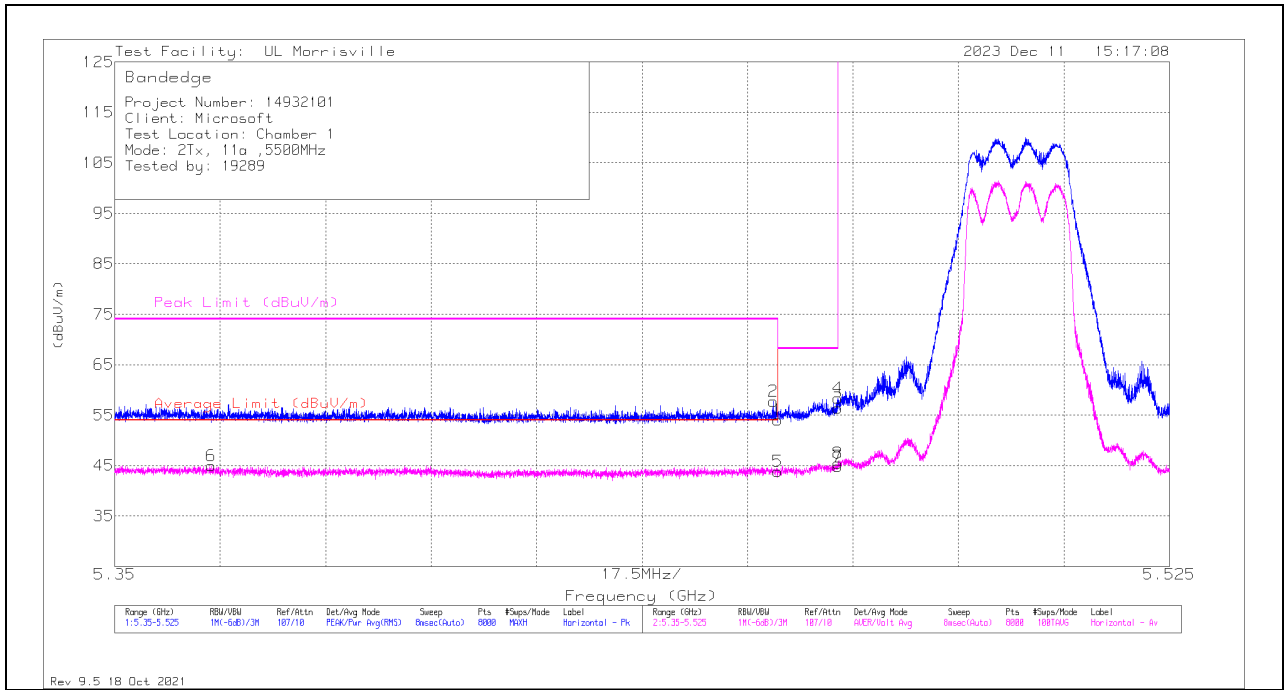

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.95	Pk	34.4	-23.3	10	54.05	-	-	74	-19.95	38	383	H
2	* ** 5.45924	36.63	Pk	34.4	-23.3	10	57.73	-	-	74	-16.27	38	383	H
5	* ** 5.45998	22.78	ADV	34.4	-23.3	10	43.88	54	-10.12	-	-	38	383	H
6	* ** 5.36597	23.29	ADV	34.5	-22.8	10	44.99	54	-9.01	-	-	38	383	H
4	5.46996	37.16	Pk	34.4	-23.2	10	58.36	-	-	68.2	-9.84	38	383	H
8	5.46996	24.29	ADV	34.4	-23.2	10	45.49	-	-	-	-	38	383	H
3	5.46998	35.22	Pk	34.4	-23.2	10	56.42	-	-	68.2	-11.78	38	383	H
7	5.46998	23.61	ADV	34.4	-23.2	10	44.81	-	-	-	-	38	383	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**VERTICAL RESULT**

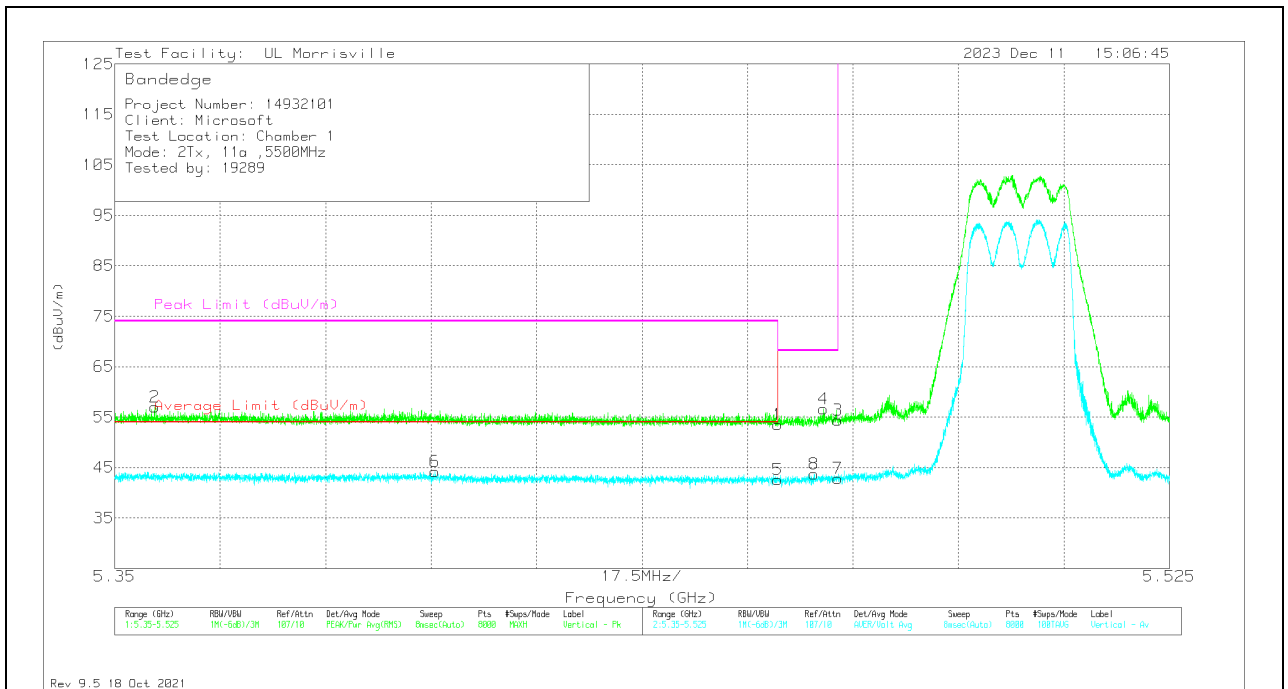


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.44	Pk	34.4	-23.3	10	53.54	-	-	74	-20.46	347	221	V
2	* ** 5.35661	35.16	Pk	34.5	-22.7	10	56.96	-	-	74	-17.04	347	221	V
5	* ** 5.45998	21.51	ADV	34.4	-23.3	10	42.61	54	-11.39	-	-	347	221	V
6	* ** 5.40312	22.7	ADV	34.5	-23	10	44.2	54	-9.8	-	-	347	221	V
8	5.466	22.73	ADV	34.4	-23.4	10	43.73	-	-	-	-	347	221	V
4	5.46764	35.47	Pk	34.4	-23.3	10	56.57	-	-	68.2	-11.63	347	221	V
3	5.46998	33.2	Pk	34.4	-23.2	10	54.4	-	-	68.2	-13.8	347	221	V
7	5.46998	21.61	ADV	34.4	-23.2	10	42.81	-	-	-	-	347	221	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

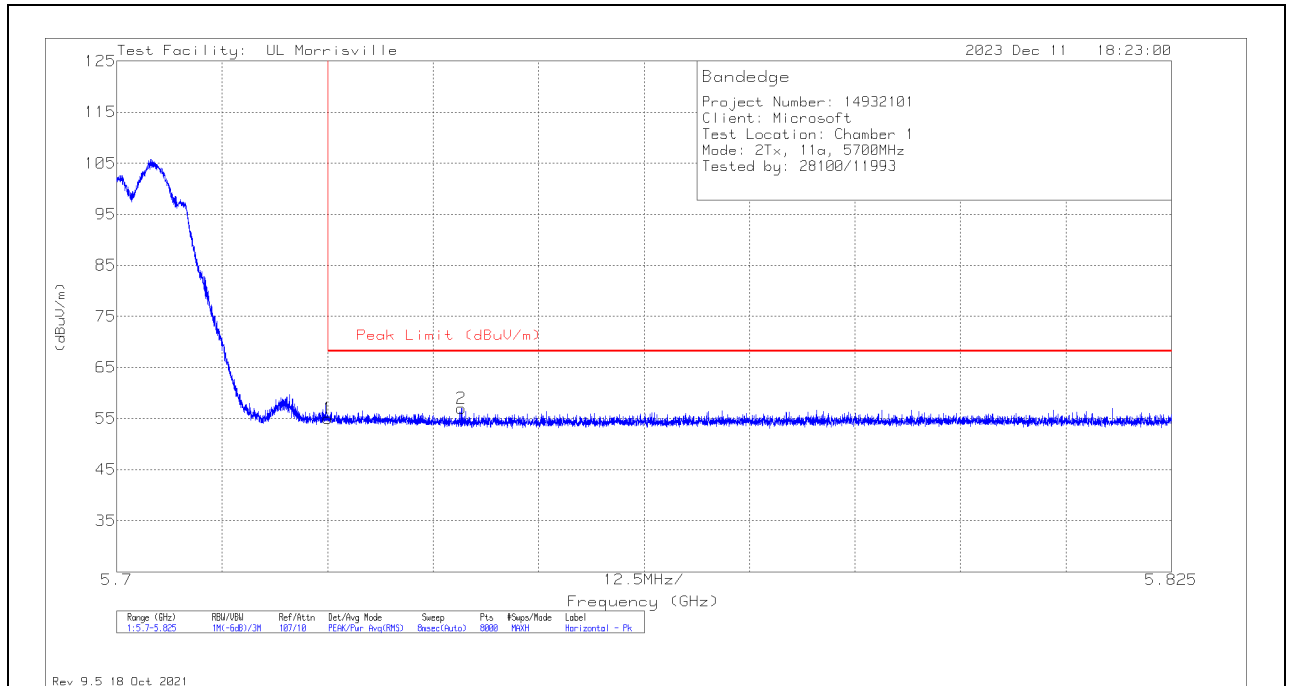

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	33.57	Pk	34.5	-23	10	55.07	68.2	-13.13	256	385	H
2	5.74086	35.73	Pk	34.5	-23.2	10	57.03	68.2	-11.17	256	385	H

Pk - Peak detector

**VERTICAL RESULT**

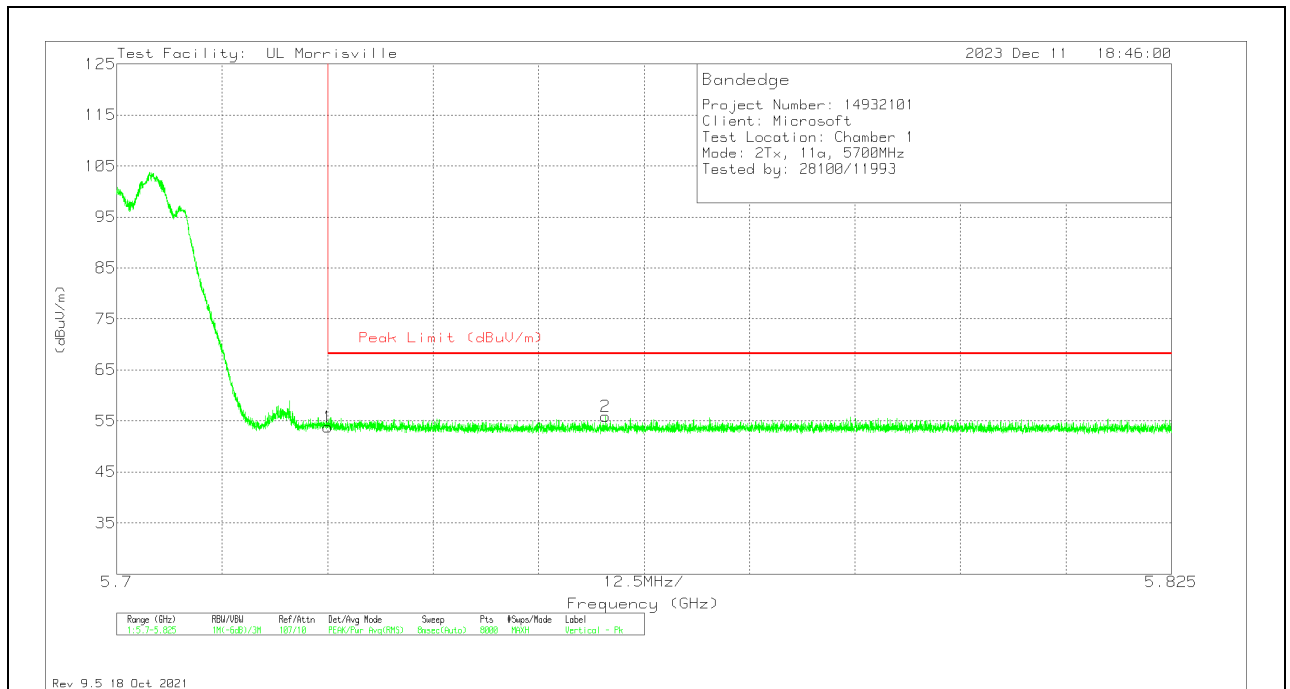

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	32.35	Pk	34.5	-23	10	53.85	68.2	-14.35	6	257	V
2	5.75791	34.49	Pk	34.6	-23.2	10	55.89	68.2	-12.31	6	257	V


Pk - Peak detector

**11.1.18. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND**

**2TX CDD MODE**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

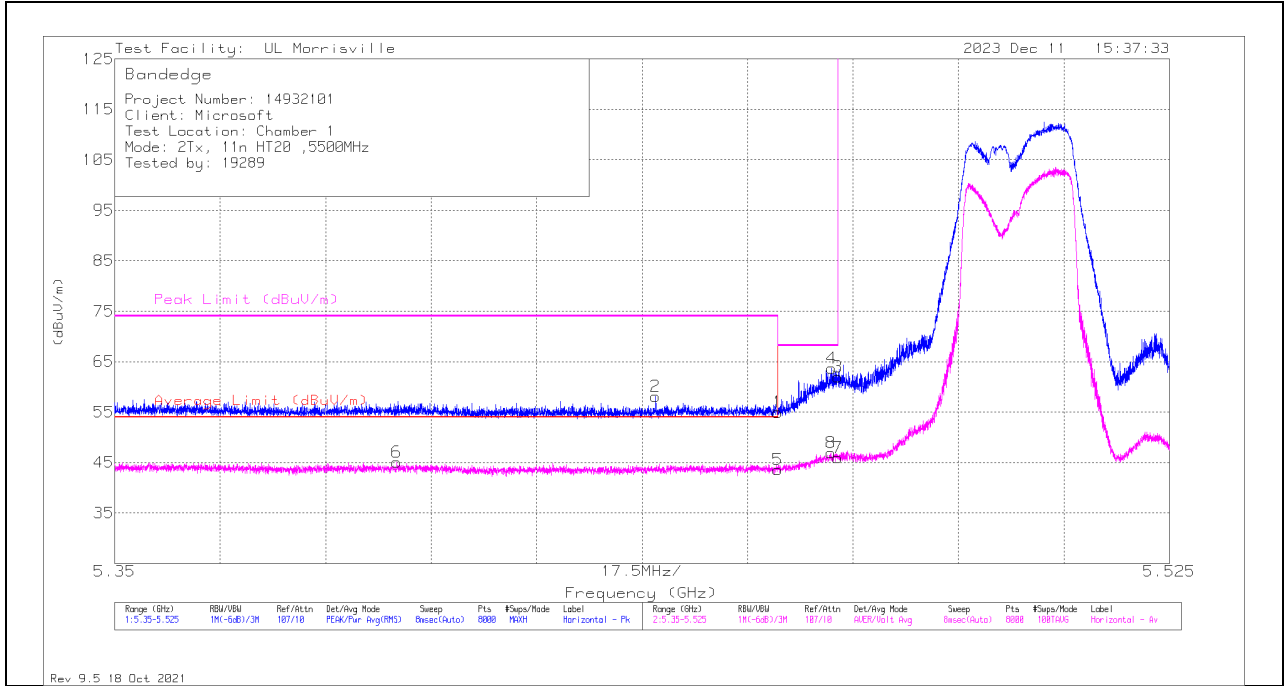

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.85	Pk	34.4	-23.3	10	54.95	-	-	74	-19.05	26	381	H
2	* ** 5.43977	36.83	Pk	34.4	-23.1	10	58.13	-	-	74	-15.87	26	381	H
5	* ** 5.45998	22.44	ADV	34.4	-23.3	10	43.54	54	-10.46	-	-	26	381	H
6	* ** 5.39682	23.46	ADV	34.5	-22.9	10	45.06	54	-8.94	-	-	26	381	H
8	5.4688	25.82	ADV	34.4	-23.3	10	46.92	-	-	-	-	26	381	H
4	5.46891	42.65	Pk	34.4	-23.3	10	63.75	-	-	68.2	-4.45	26	381	H
3	5.46998	40.78	Pk	34.4	-23.2	10	61.98	-	-	68.2	-6.22	26	381	H
7	5.46998	24.8	ADV	34.4	-23.2	10	46	-	-	-	-	26	381	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

### VERTICAL RESULT

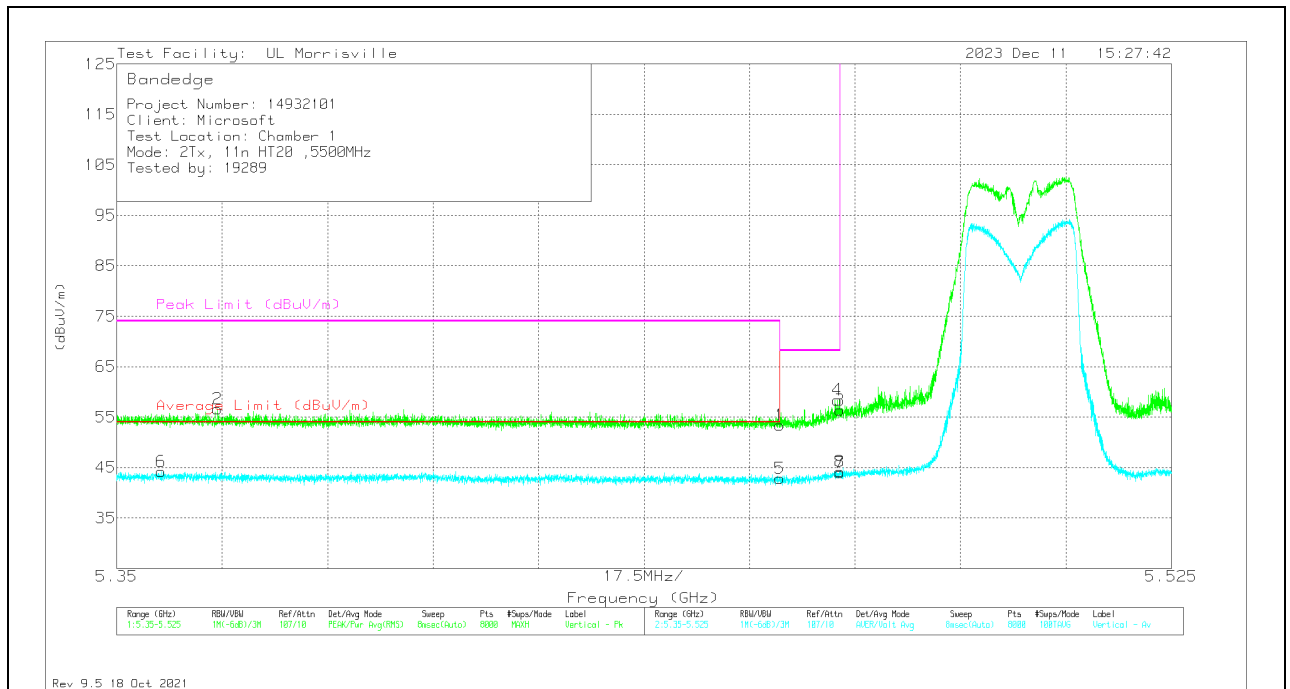


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.26	Pk	34.4	-23.3	10	53.36	-	-	74	-20.64	350	276	V
2	* ** 5.36674	35.02	Pk	34.5	-22.9	10	56.62	-	-	74	-17.38	350	276	V
5	* ** 5.45998	21.78	ADV	34.4	-23.3	10	42.88	54	-11.12	-	-	350	276	V
6	* ** 5.35735	22.4	ADV	34.5	-22.7	10	44.2	54	-9.8	-	-	350	276	V
4	5.46956	37.22	Pk	34.4	-23.2	10	58.42	-	-	68.2	-9.78	350	276	V
8	5.46996	22.97	ADV	34.4	-23.2	10	44.17	-	-	-	-	350	276	V
3	5.46998	35.2	Pk	34.4	-23.2	10	56.4	-	-	68.2	-11.8	350	276	V
7	5.46998	22.79	ADV	34.4	-23.2	10	43.99	-	-	-	-	350	276	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

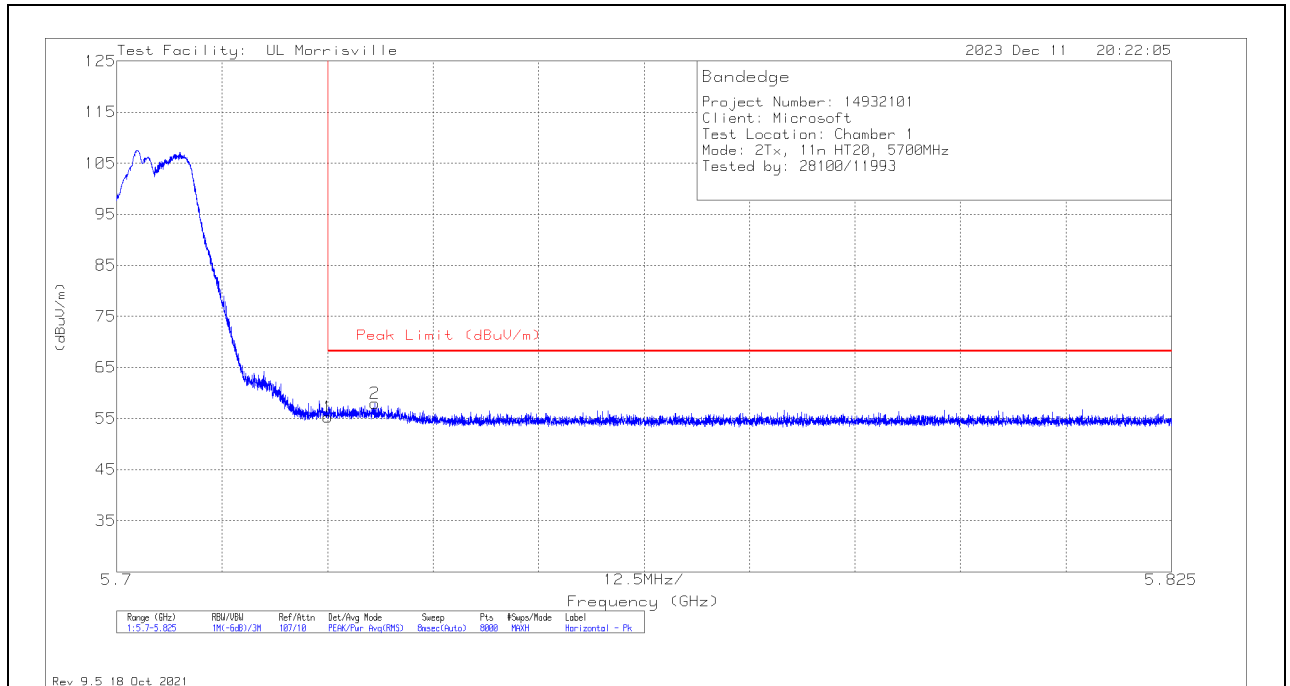


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	33.81	Pk	34.5	-23	10	55.31	68.2	-12.89	21	330	H
2	5.73057	36.5	Pk	34.5	-22.9	9.9	58	68.2	-10.2	21	330	H

Pk - Peak detector



**VERTICAL RESULT**

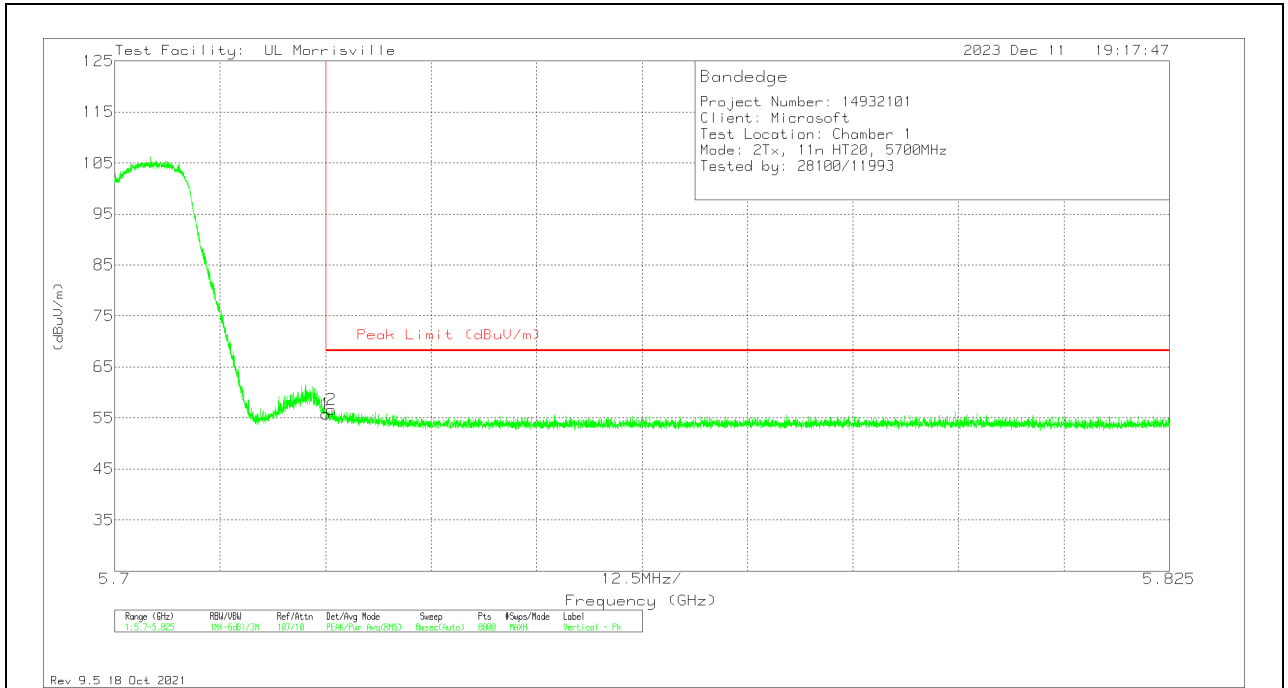


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	34.29	Pk	34.5	-23	10	55.79	68.2	-12.41	356	232	V
2	5.72572	35.15	Pk	34.5	-23	10	56.65	68.2	-11.55	356	232	V


Pk - Peak detector

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

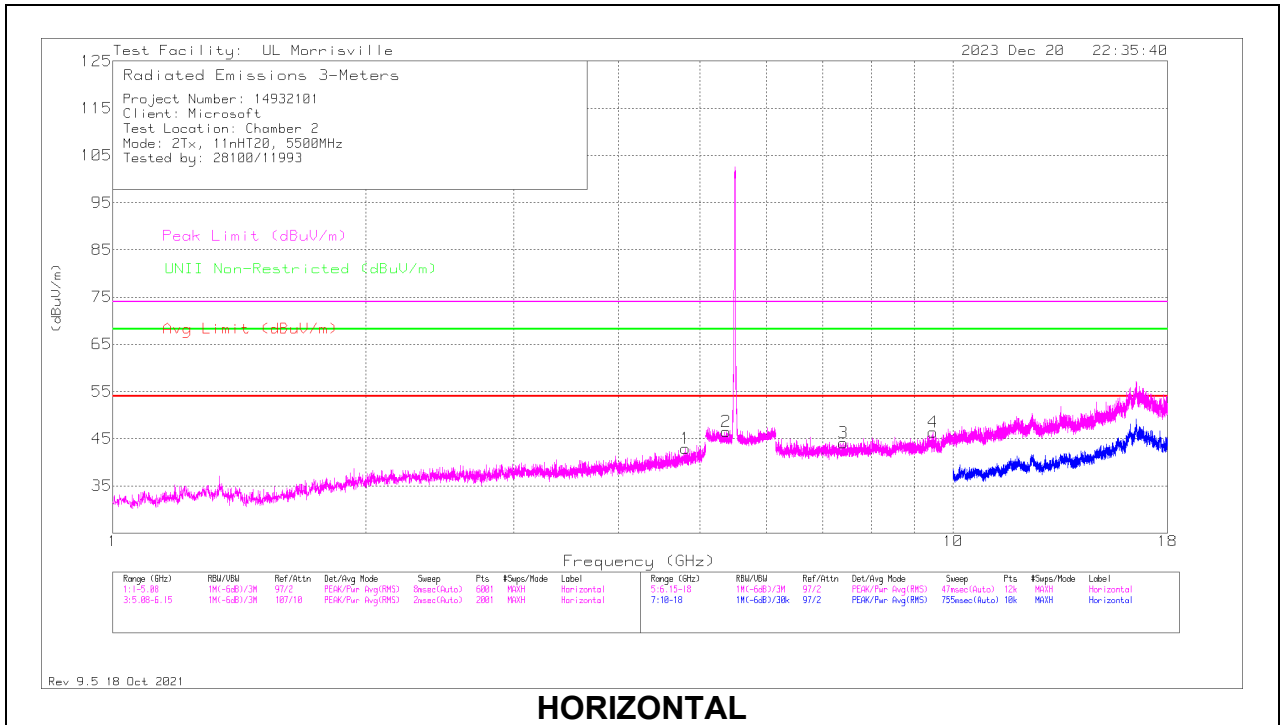

**HORIZONTAL**

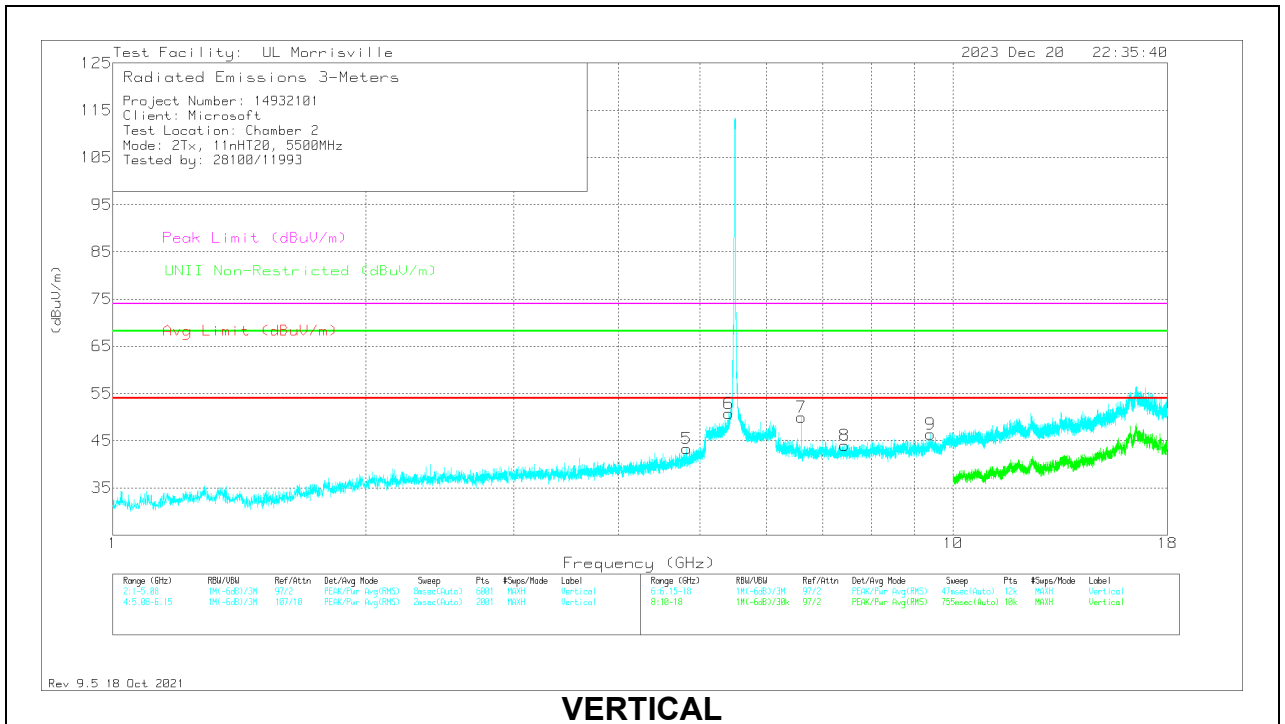

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.80528	38.51	Pk	34.2	-29.8	42.91	54	-11.09	74	-31.09	-	-	0-360	101	H
5	*** 4.81752	39.23	Pk	34.2	-30.1	43.33	54	-10.67	74	-30.67	-	-	0-360	200	V
2	*** 5.37372	35.06	Pk	34.4	-23	46.46	54	-7.54	74	-27.54	-	-	0-360	101	H
6	*** 5.41238	42.28	PK-U	34.4	-23.3	53.38	-	-	74	-20.62	-	-	69	289	V
	*** 5.41261	29.99	ADV	34.4	-23.3	41.09	54	-12.91	-	-	-	-	69	289	V
3	*** 7.4061	35.97	Pk	35.6	-27.4	44.17	54	-9.83	74	-29.83	-	-	0-360	200	H
4	*** 9.46899	36.2	Pk	36.3	-26.1	46.4	54	-7.6	74	-27.6	-	-	0-360	101	H
8	*** 7.43178	35.43	Pk	35.6	-27.1	43.93	54	-10.07	74	-30.07	-	-	0-360	200	V
9	*** 9.39789	36.05	Pk	36.2	-25.9	46.35	54	-7.65	74	-27.65	-	-	0-360	101	V
7	6.6	45.77	PK-U	35.6	-28.5	52.87	-	-	-	-	68.2	-15.33	72	247	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

### MID CHANNEL RESULTS

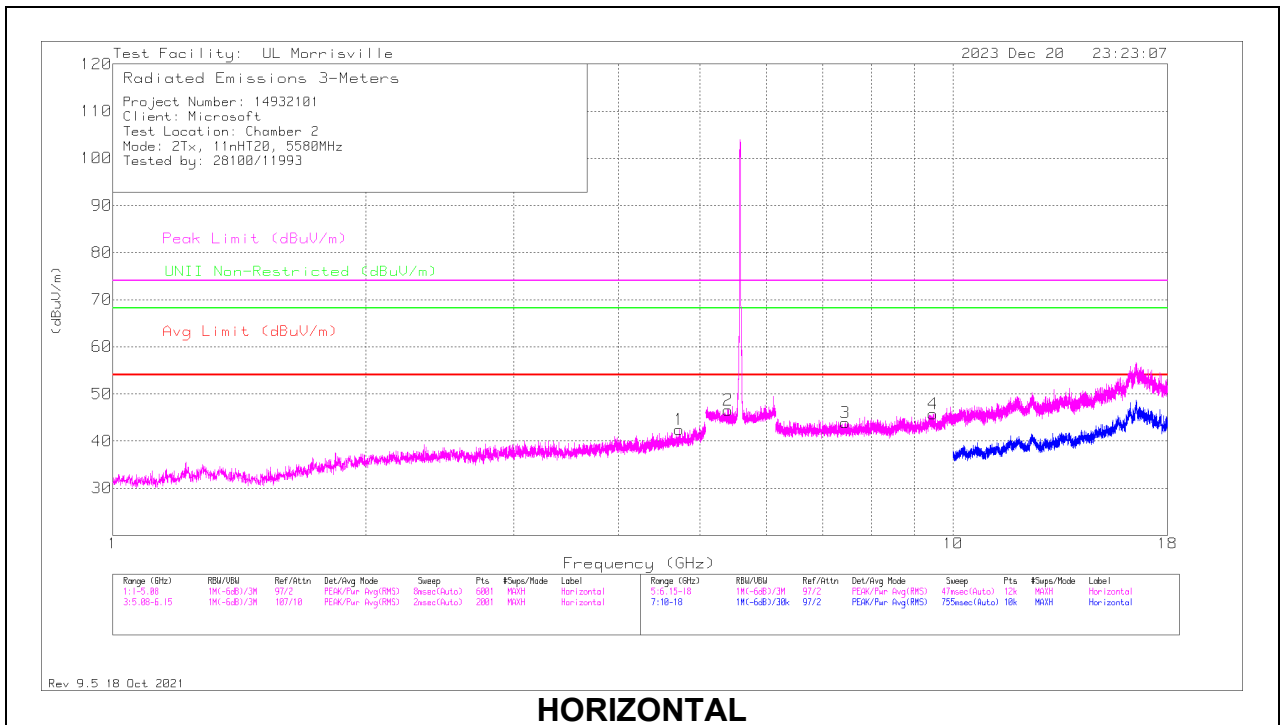

### HORIZONTAL

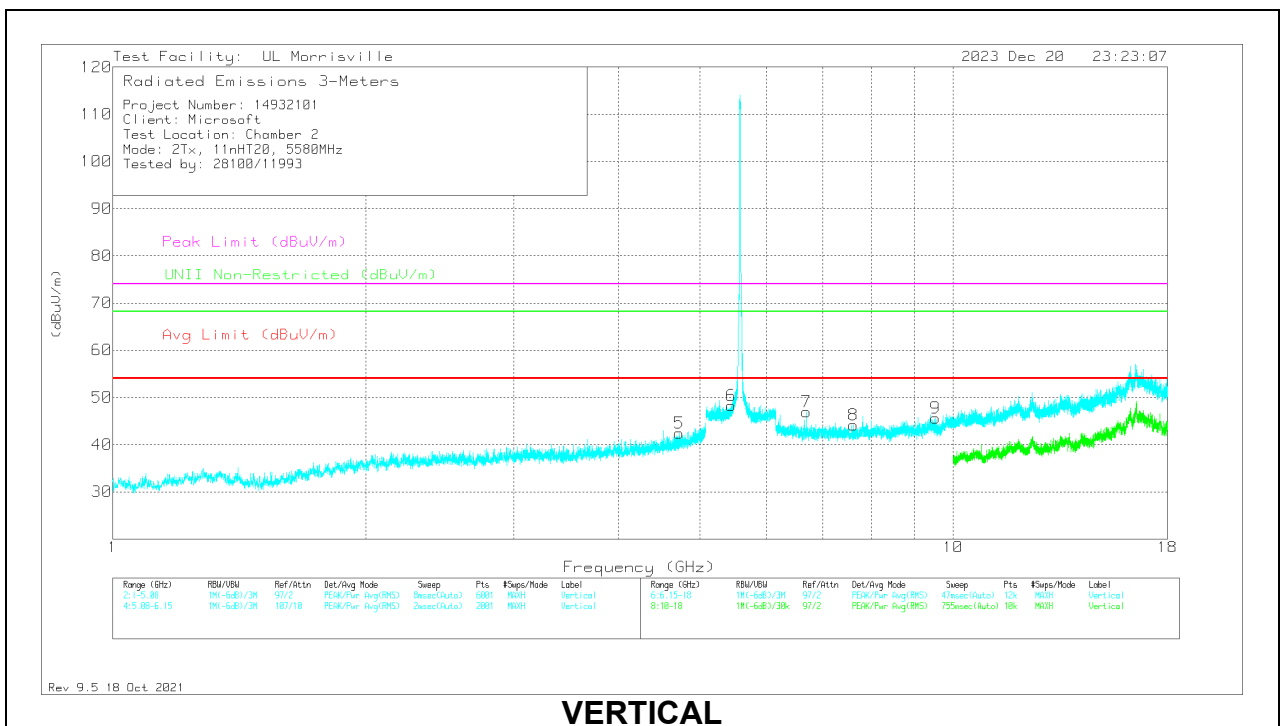

### VERTICAL

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.72232	38.75	Pk	34.1	-30.4	42.45	54	-11.55	74	-31.55	-	-	0-360	200	H
5	*** 4.72164	38.77	Pk	34.1	-30.4	42.47	54	-11.53	74	-31.53	-	-	0-360	200	V
2	*** 5.39565	35.13	Pk	34.4	-23	46.53	54	-7.47	74	-27.47	-	-	0-360	101	H
6	*** 5.44888	41.23	PK-U	34.5	-23.1	52.63	-	-	74	-21.37	-	-	68	269	V
	*** 5.45223	28.74	ADV	34.5	-23.2	40.04	54	-13.96	-	-	-	-	68	269	V
3	*** 7.44264	35.5	Pk	35.6	-27.2	43.9	54	-10.1	74	-30.1	-	-	0-360	199	H
4	*** 9.46603	35.4	Pk	36.3	-25.9	45.8	54	-8.2	74	-28.2	-	-	0-360	199	H
8	*** 7.61446	35.38	Pk	35.6	-26.8	44.18	54	-9.82	74	-29.82	-	-	0-360	199	V
7	6.6951	39.98	Pk	35.6	-28.6	46.98	54	-7.02	74	-27.02	68.2	-21.22	0-360	199	V
9	9.53318	34.17	Pk	36.4	-24.9	45.67	54	-8.33	74	-28.33	68.2	-22.53	0-360	199	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

### HIGH CHANNEL RESULTS

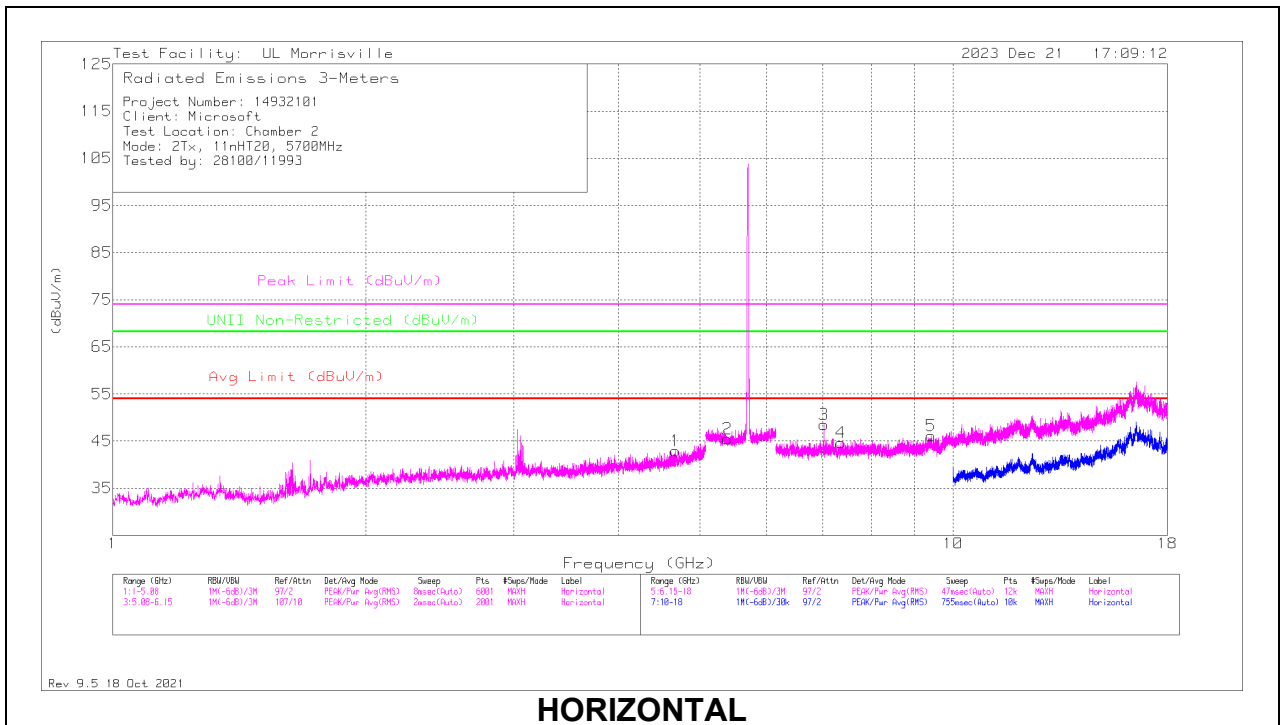

**HORIZONTAL**

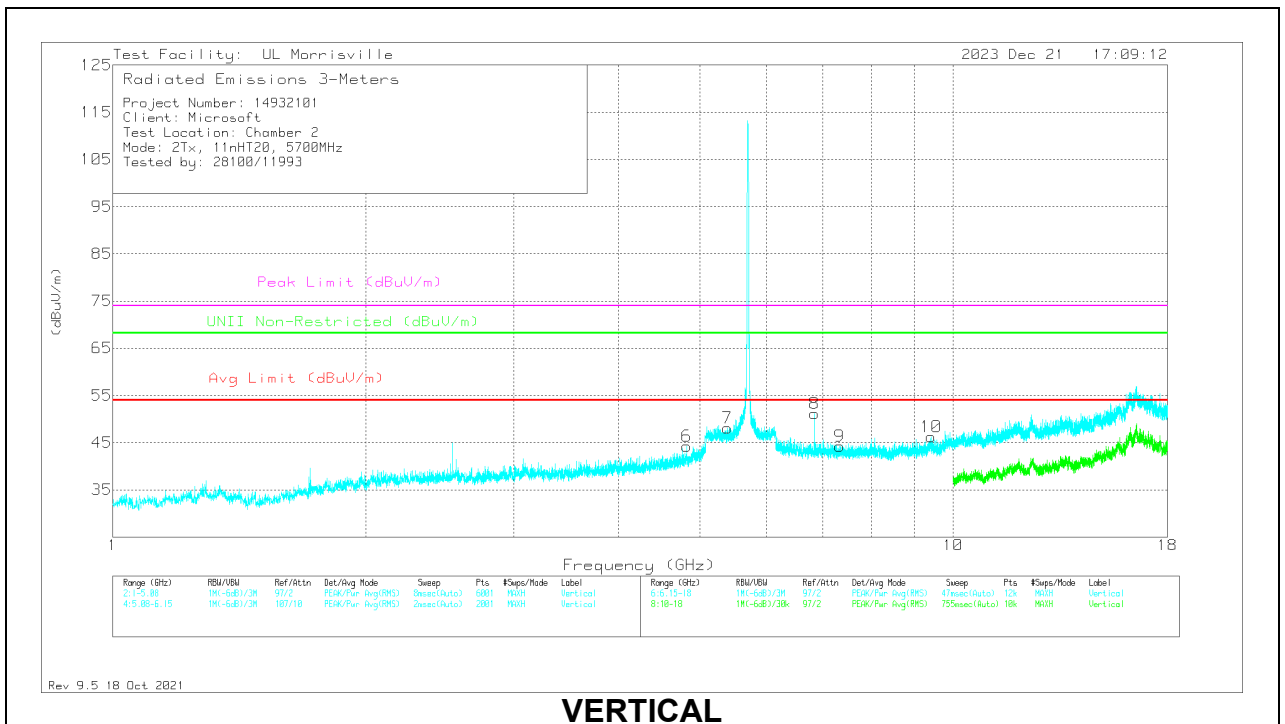

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.672	39.26	Pk	34.1	-30.4	42.96	54	-11.04	74	-31.04	-	-	0-360	101	H
6	* ** 4.82092	40.3	Pk	34.2	-30.2	44.3	54	-9.7	74	-29.7	-	-	0-360	101	V
2	* ** 5.39351	34.03	Pk	34.4	-23	45.43	54	-8.57	74	-28.57	-	-	0-360	200	H
7	* ** 5.39276	38.69	PK-U	34.4	-23	50.09	-	-	74	-23.91	-	-	49	274	V
	* ** 5.39113	26.45	ADV	34.4	-23	37.85	54	-16.15	-	-	-	-	49	274	V
4	* ** 7.35574	36.31	Pk	35.6	-27.3	44.61	54	-9.39	74	-29.39	-	-	0-360	199	H
5	* ** 9.41961	35.63	Pk	36.2	-25.7	46.13	54	-7.87	74	-27.87	-	-	0-360	199	H
9	* ** 7.33401	36.05	Pk	35.6	-27.4	44.25	54	-9.75	74	-29.75	-	-	0-360	199	V
10	* ** 9.42159	35.87	Pk	36.2	-25.8	46.27	54	-7.73	74	-27.73	-	-	0-360	101	V
8	6.83988	45.23	PK-U	35.7	-27.8	53.13	-	-	-	-	68.2	-15.07	69	211	V
3	7.02579	40.6	PK-U	35.6	-27.5	48.7	-	-	-	-	68.2	-19.5	233	114	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK-U - Maximum Peak


ADV - Linear Voltage Average

**11.1.19. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND**

**2TX CDD MODE**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

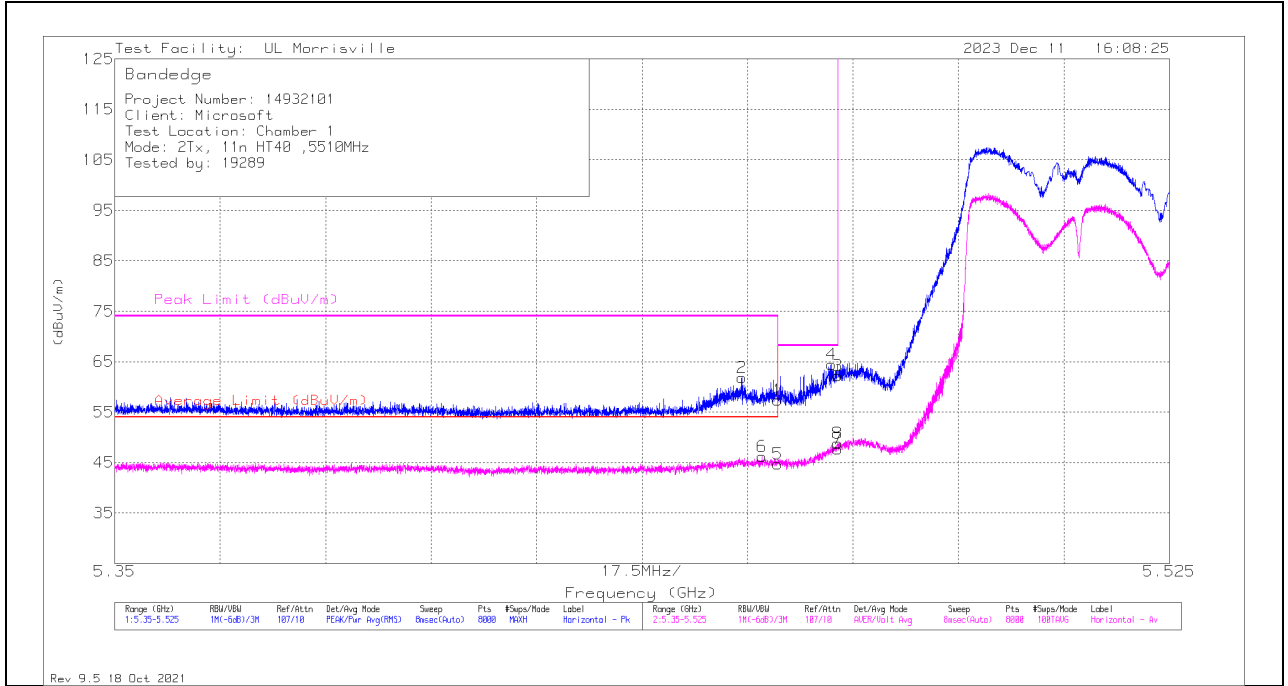


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	36.28	Pk	34.4	-23.3	10	57.38	-	-	74	-16.62	43	383	H
2	* ** 5.45403	40.67	Pk	34.4	-23.2	10	61.87	-	-	74	-12.13	43	383	H
5	* ** 5.45998	23.66	ADV	34.4	-23.3	10	44.76	54	-9.24	-	-	43	383	H
6	* ** 5.45738	25.08	ADV	34.4	-23.3	10	46.18	54	-7.82	-	-	43	383	H
4	5.46899	43.25	Pk	34.4	-23.2	10	64.45	-	-	68.2	-3.75	43	383	H
8	5.46994	27.65	ADV	34.4	-23.2	10	48.85	-	-	-	-	43	383	H
3	5.46998	41.04	Pk	34.4	-23.2	10	62.24	-	-	68.2	-5.96	43	383	H
7	5.46998	26.47	ADV	34.4	-23.2	10	47.67	-	-	-	-	43	383	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



**VERTICAL RESULT**

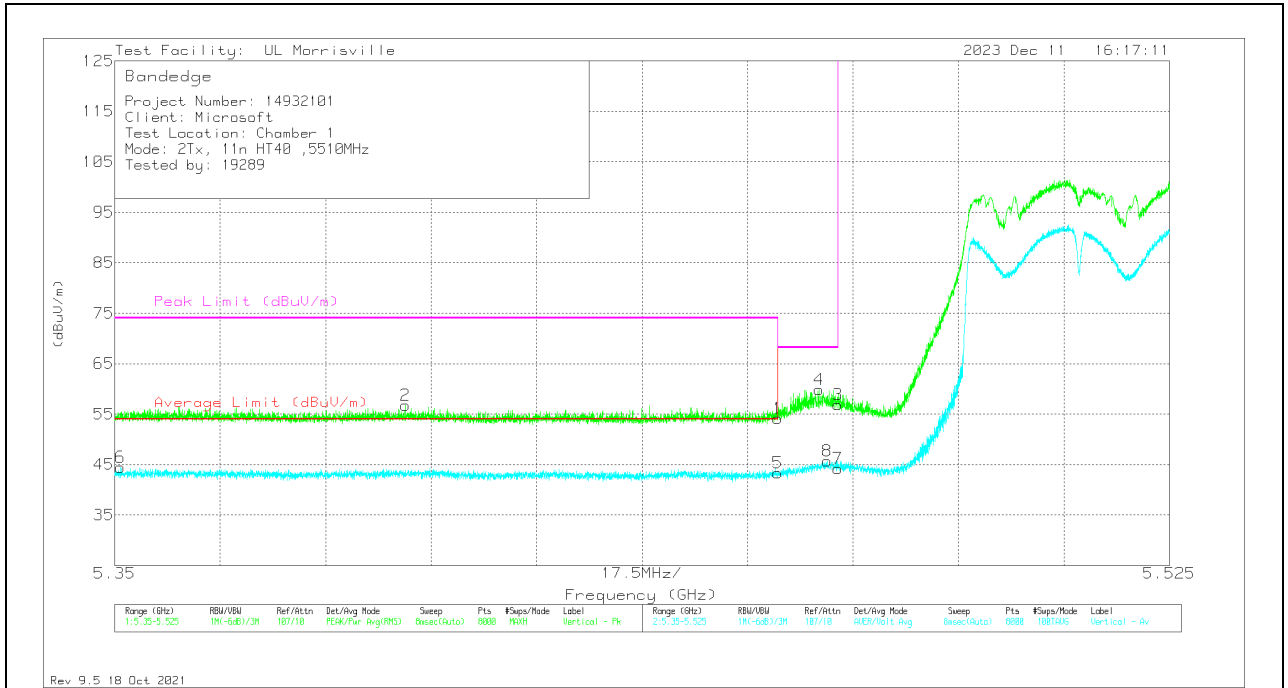


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.04	Pk	34.4	-23.3	10	54.14	-	-	74	-19.86	1	263	V
2	* ** 5.39826	35.11	Pk	34.5	-22.9	10	56.71	-	-	74	-17.29	1	263	V
5	* ** 5.45998	22.24	ADV	34.4	-23.3	10	43.34	54	-10.66	-	-	1	263	V
6	* ** 5.35094	22.64	ADV	34.5	-22.7	10	44.44	54	-9.56	-	-	1	263	V
4	5.46685	38.8	Pk	34.4	-23.3	10	59.9	-	-	68.2	-8.3	1	263	V
8	5.46821	24.59	ADV	34.4	-23.3	10	45.69	-	-	-	-	1	263	V
3	5.46998	35.68	Pk	34.4	-23.2	10	56.88	-	-	68.2	-11.32	1	263	V
7	5.46998	22.99	ADV	34.4	-23.2	10	44.19	-	-	-	-	1	263	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

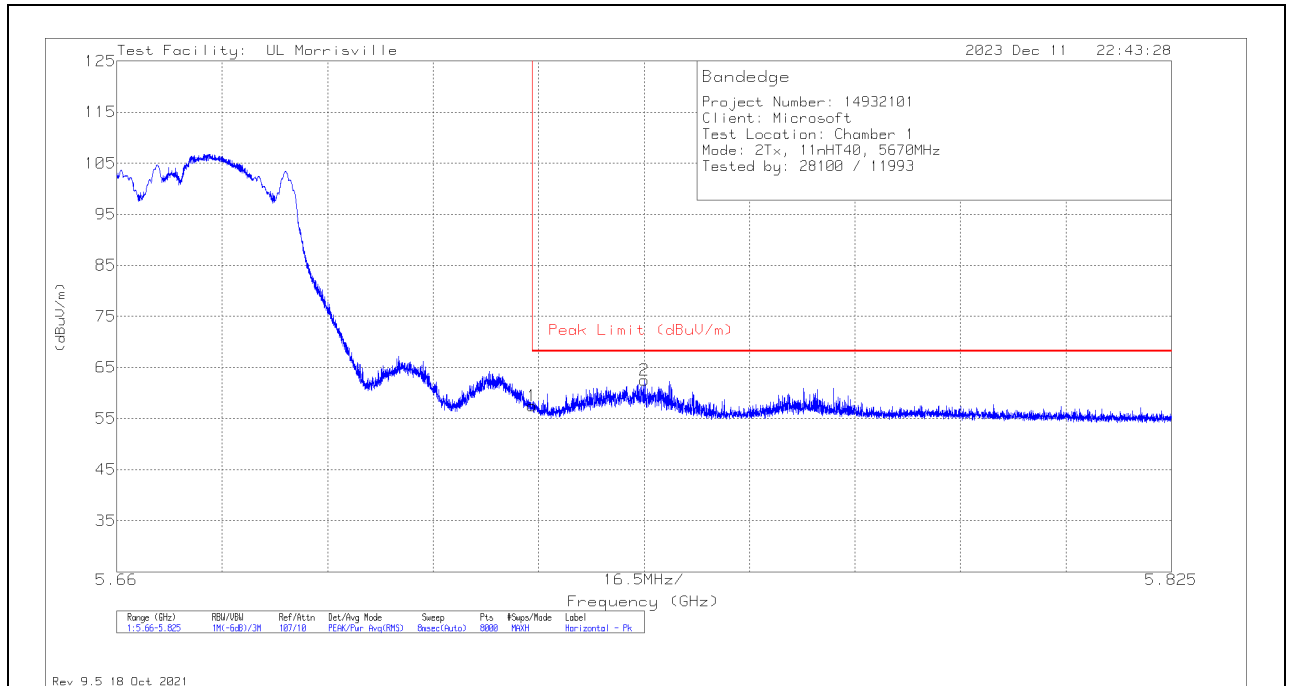

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	36.01	Pk	34.5	-23	10	57.51	68.2	-10.69	75	379	H
2	5.74255	41.18	Pk	34.5	-23.2	10	62.48	68.2	-5.72	75	379	H

Pk - Peak detector

### VERTICAL RESULT

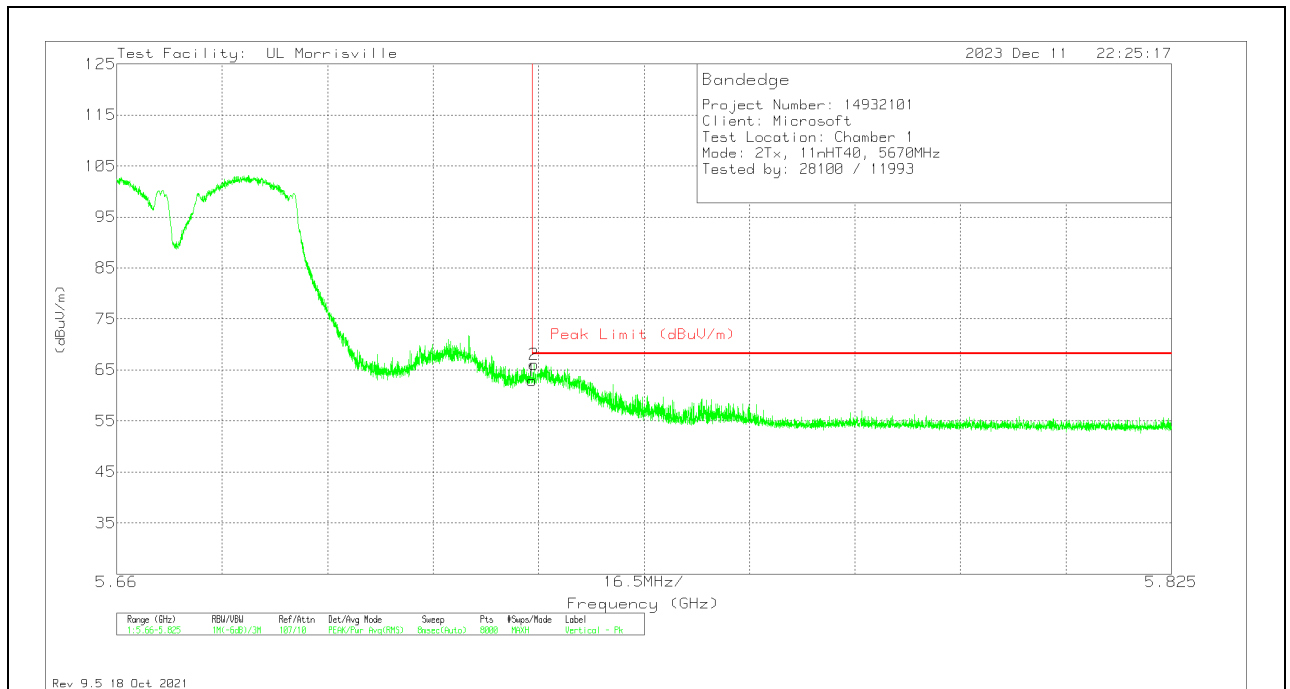

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	41.45	Pk	34.5	-23	10	62.95	68.2	-5.25	337	251	V
2	5.72527	44.6	Pk	34.5	-23	10	66.1	68.2	-2.1	337	251	V


Pk - Peak detector

### 11.1.20. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

#### 2TX CDD MODE

#### BANDEDGE (LOW CHANNEL)


#### HORIZONTAL RESULT

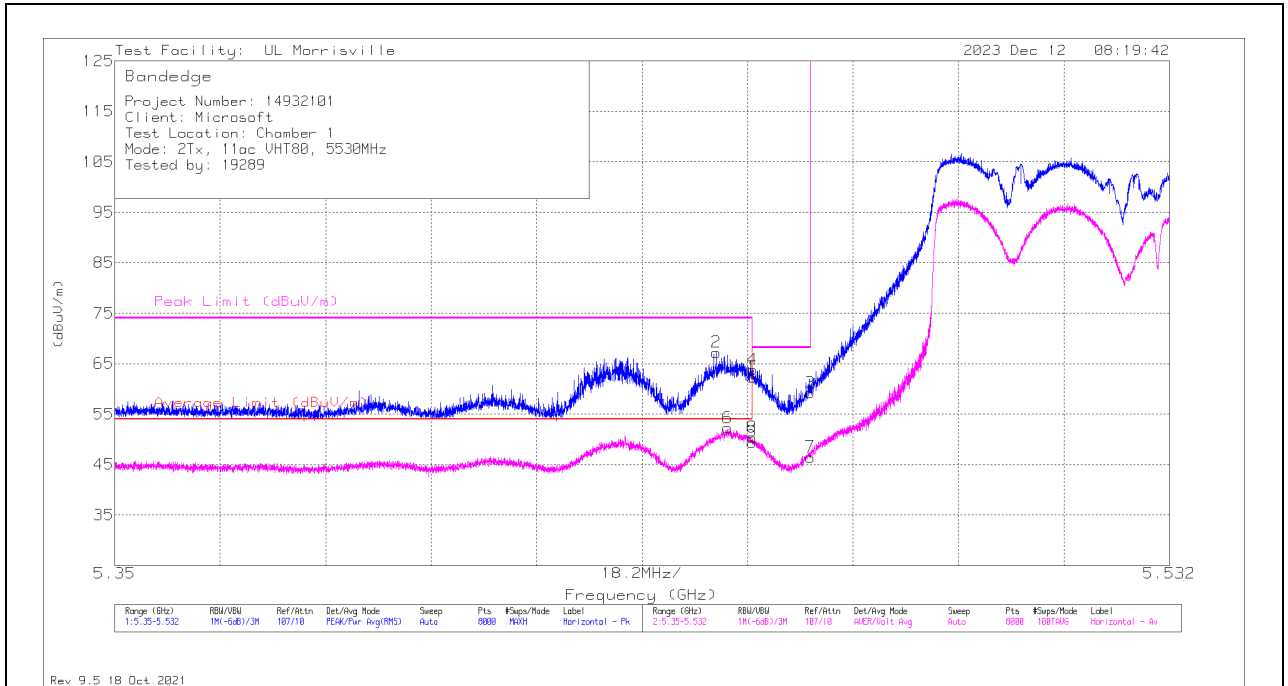

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	41.27	Pk	34.4	-23.3	10	0	62.37	-	-	74	-11.63	30	360	H
2	* ** 5.45378	46.04	Pk	34.4	-23.2	10	0	67.24	-	-	74	-6.76	30	360	H
5	* ** 5.45999	28.11	ADV	34.4	-23.3	10	.21	49.42	54	-4.58	-	-	30	360	H
6	* ** 5.4558	30.88	ADV	34.4	-23.2	10	.21	52.29	54	-1.71	-	-	30	360	H
8	5.46001	29.13	ADV	34.4	-23.3	10	.21	50.44	-	-	-	-	30	360	H
4	5.46012	42.68	Pk	34.4	-23.3	10	0	63.78	-	-	68.2	-4.42	30	360	H
3	5.47	38.08	Pk	34.4	-23.2	10	0	59.28	-	-	68.2	-8.92	30	360	H
7	5.47	25.09	ADV	34.4	-23.2	10	.21	46.5	-	-	-	-	30	360	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**VERTICAL RESULT**

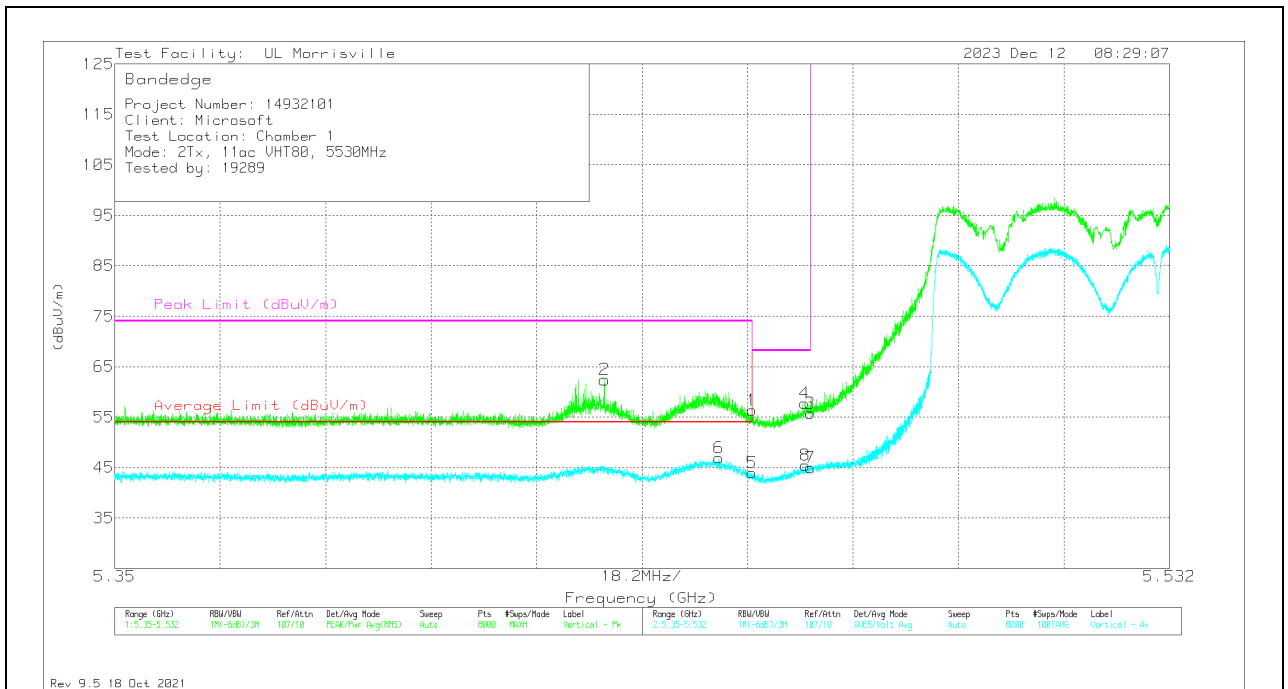


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	35.26	Pk	34.4	-23.3	10	0	56.36	-	-	74	-17.64	340	246	V
2	* ** 5.4345	41.2	Pk	34.4	-23.2	10	0	62.4	-	-	74	-11.6	340	246	V
5	* ** 5.45999	22.6	ADV	34.4	-23.3	10	.21	43.91	54	-10.09	-	-	340	246	V
6	* ** 5.45428	25.49	ADV	34.4	-23.2	10	.21	46.9	54	-7.1	-	-	340	246	V
4	5.46909	36.52	Pk	34.4	-23.2	10	0	57.72	-	-	68.2	-10.48	340	246	V
8	5.46918	24.07	ADV	34.4	-23.2	10	.21	45.48	-	-	-	-	340	246	V
3	5.47	34.53	Pk	34.4	-23.2	10	0	55.73	-	-	68.2	-12.47	340	246	V
7	5.47	23.59	ADV	34.4	-23.2	10	.21	45	-	-	-	-	340	246	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

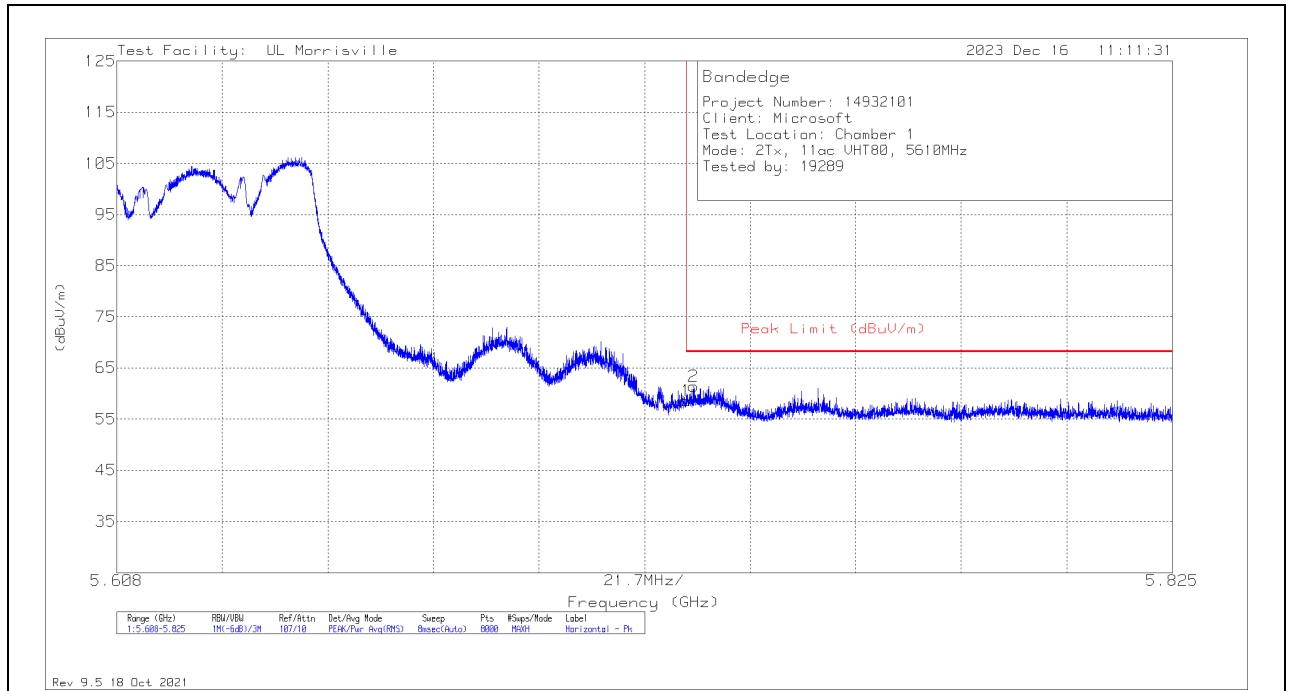

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.13	Pk	34.5	-23	10	58.63	68.2	-9.57	17	379	H
2	5.72655	39.87	Pk	34.5	-22.9	10	61.47	68.2	-6.73	17	379	H

Pk - Peak detector

**VERTICAL RESULT**

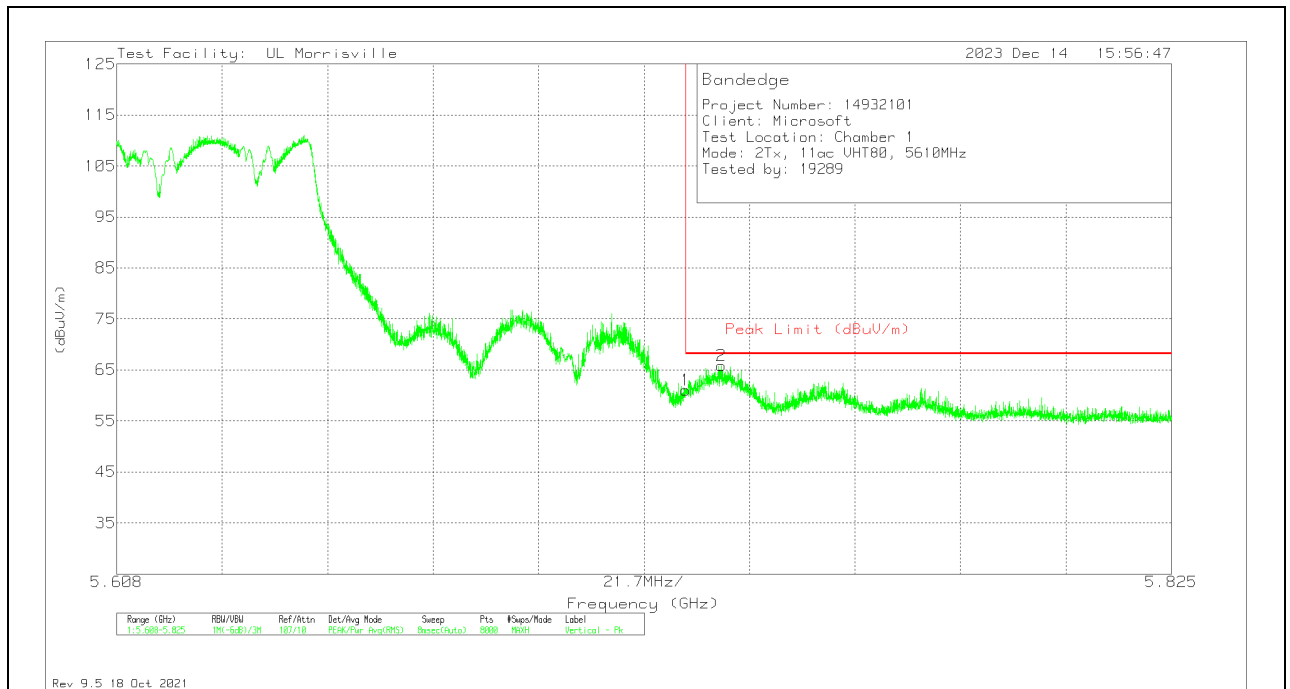

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.59	Pk	34.5	-23	10	61.09	68.2	-7.11	344	216	V
2	5.73238	44.34	Pk	34.5	-22.9	9.9	65.84	68.2	-2.36	344	216	V


Pk - Peak detector

### 11.1.21. TX ABOVE 1 GHz 802.11ac VHT160 MODE IN THE 5.6 GHz BAND

#### 2TX CDD MODE

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

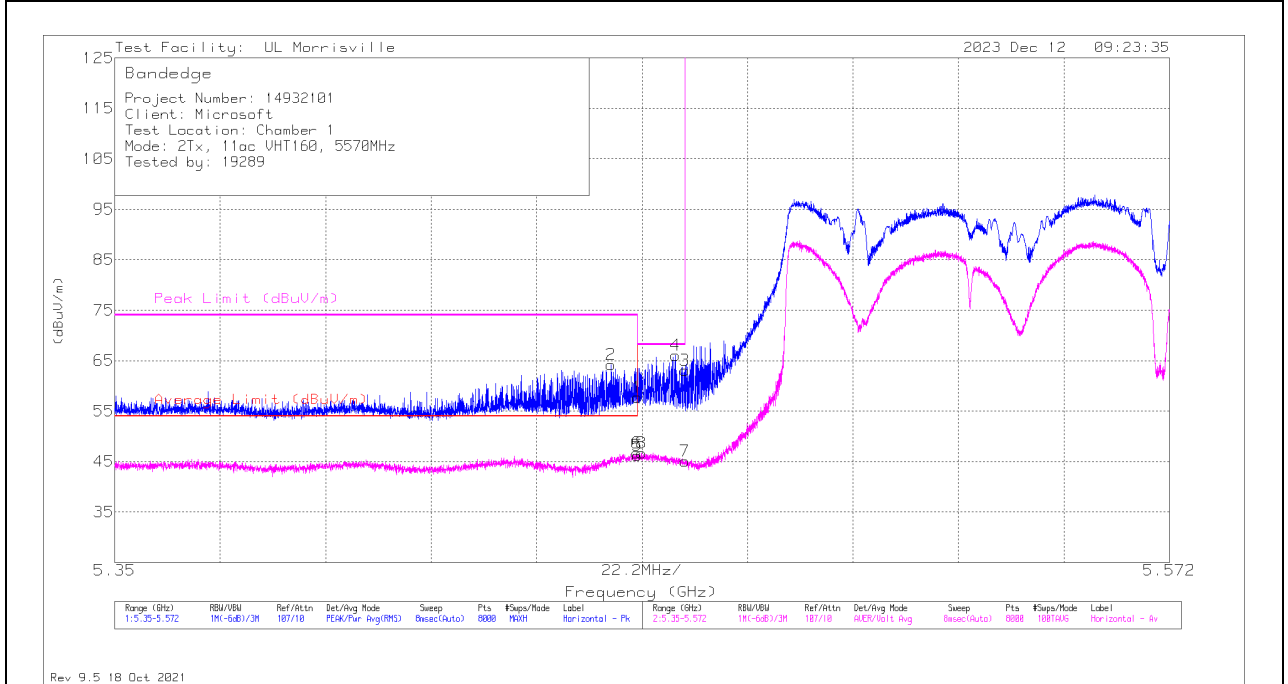


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	36.61	Pk	34.4	-23.3	10	0	57.71	-	-	74	-16.29	20	364	H
2	*** 5.45449	43.04	Pk	34.4	-23.2	10	0	64.24	-	-	74	-9.76	20	364	H
5	*** 5.45999	25.04	ADV	34.4	-23.3	10	0.43	46.57	54	-7.43	-	-	20	364	H
6	*** 5.45982	25.55	ADV	34.4	-23.3	10	0.43	47.08	54	-6.92	-	-	20	364	H
8	5.4609	25.59	ADV	34.4	-23.3	10	0.43	47.12	-	-	-	-	20	364	H
4	5.46803	44.99	Pk	34.4	-23.3	10	0	66.09	-	-	68.2	-2.11	20	364	H
3	5.46998	41.83	Pk	34.4	-23.2	10	0	63.03	-	-	68.2	-5.17	20	364	H
7	5.46998	23.84	ADV	34.4	-23.2	10	0.43	45.47	-	-	-	-	20	364	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



### VERTICAL RESULT

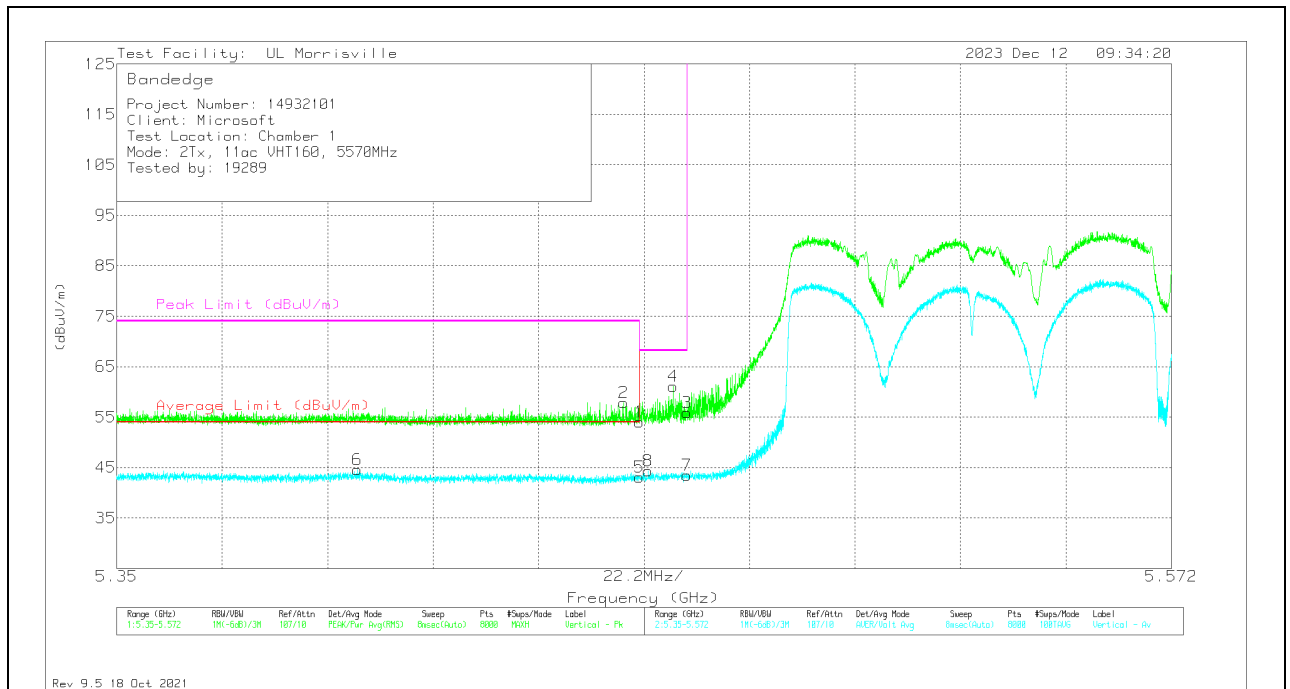

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** * 5.45999	32.95	Pk	34.4	-23.3	10	0	54.05	-	-	74	-19.95	8	265	V
2	** * 5.45674	36.72	Pk	34.4	-23.2	10	0	57.92	-	-	74	-16.08	8	265	V
5	** * 5.45999	22.01	ADV	34.4	-23.3	10	0.43	43.54	54	-10.46	-	-	8	265	V
6	** * 5.40062	22.94	ADV	34.5	-22.9	10	0.43	44.97	54	-9.03	-	-	8	265	V
8	5.46184	23.19	ADV	34.4	-23.3	10	0.43	44.72	-	-	-	-	8	265	V
4	5.46712	40.03	Pk	34.4	-23.3	10	0	61.13	-	-	68.2	-7.07	8	265	V
3	5.46998	34.73	Pk	34.4	-23.2	10	0	55.93	-	-	68.2	-12.27	8	265	V
7	5.46998	22.28	ADV	34.4	-23.2	10	0.43	43.91	-	-	-	-	8	265	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

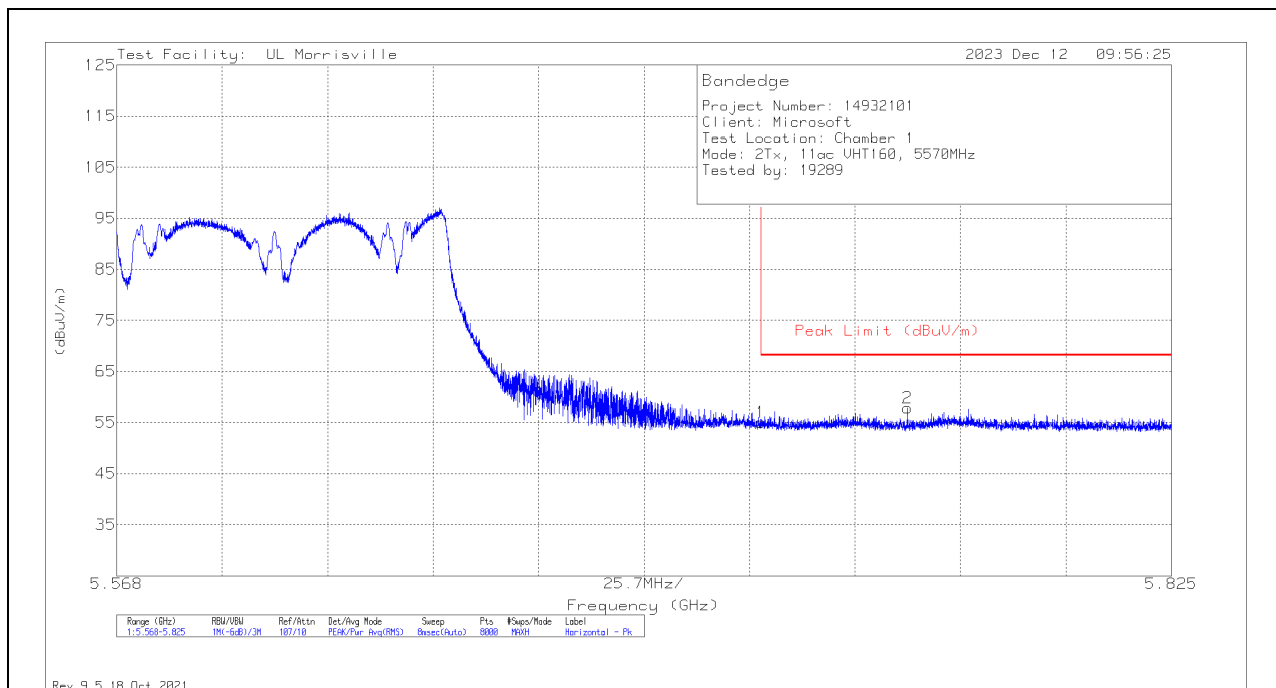

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.49	Pk	34.5	-23	10	54.99	68.2	-13.21	16	399	H
2	5.76074	36.5	Pk	34.6	-23.2	10	57.9	68.2	-10.3	16	399	H

Pk - Peak detector

**VERTICAL RESULT**

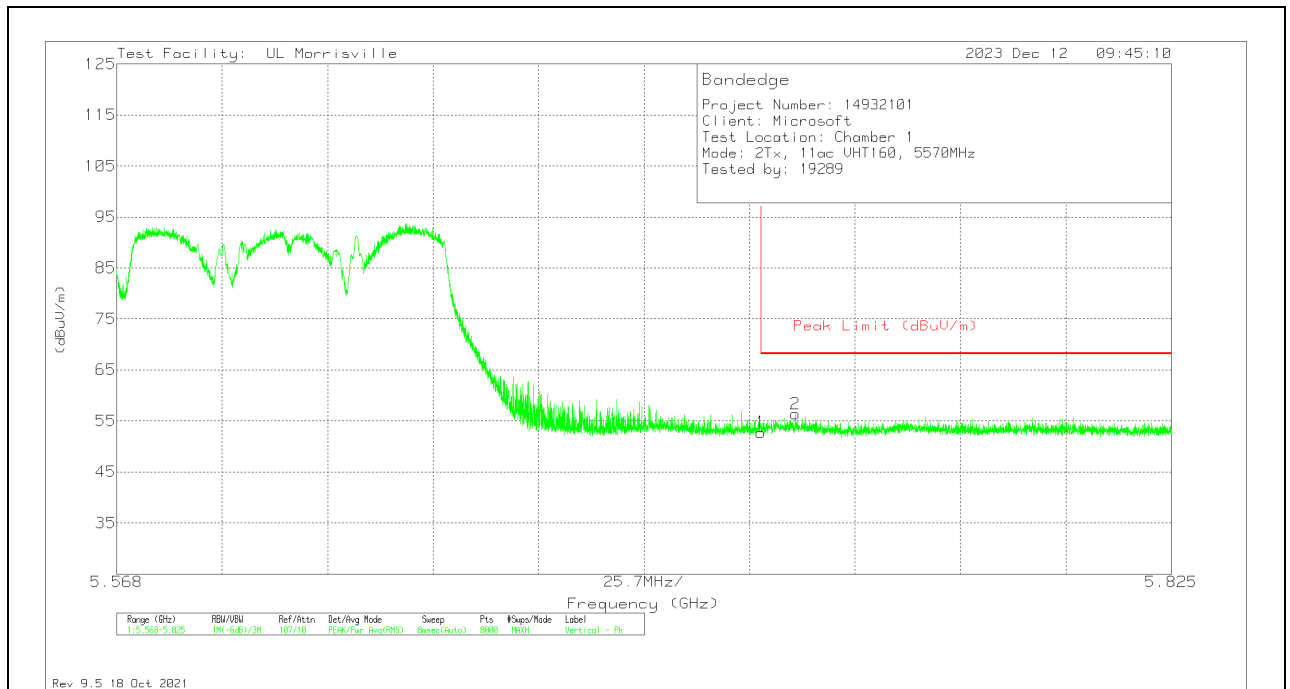

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	31.26	Pk	34.5	-23	10	52.76	68.2	-15.44	352	225	V
2	5.73334	34.95	Pk	34.5	-23	9.9	56.35	68.2	-11.85	352	225	V


Pk - Peak detector

### 11.1.22. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE 5.6 GHz BAND

#### 2TX CDD MODE – 26T

#### BANDEDGE (LOW CHANNEL)


#### HORIZONTAL RESULT

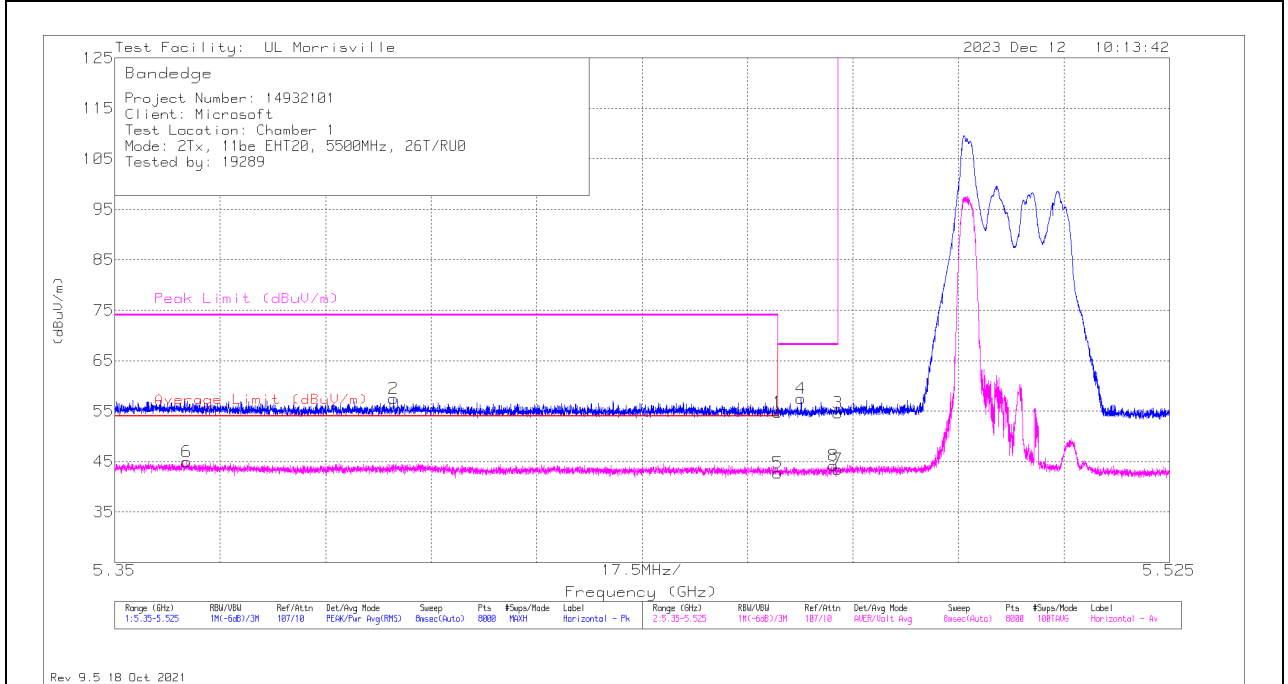

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.62	Pk	34.4	-23.3	10	54.72	-	-	74	-19.28	24	365	H
2	* ** 5.39627	35.87	Pk	34.5	-22.9	10	57.47	-	-	74	-16.53	24	365	H
5	* ** 5.45998	21.6	ADV	34.4	-23.3	10	42.7	54	-11.3	-	-	24	365	H
6	* ** 5.36192	23.23	ADV	34.5	-22.8	10	44.93	54	-9.07	-	-	24	365	H
4	5.4639	36.45	Pk	34.4	-23.4	10	57.45	-	-	68.2	-10.75	24	365	H
8	5.46926	23.03	ADV	34.4	-23.2	10	44.23	-	-	-	-	24	365	H
3	5.46998	33.42	Pk	34.4	-23.2	10	54.62	-	-	68.2	-13.58	24	365	H
7	5.46998	22.23	ADV	34.4	-23.2	10	43.43	-	-	-	-	24	365	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**VERTICAL RESULT**

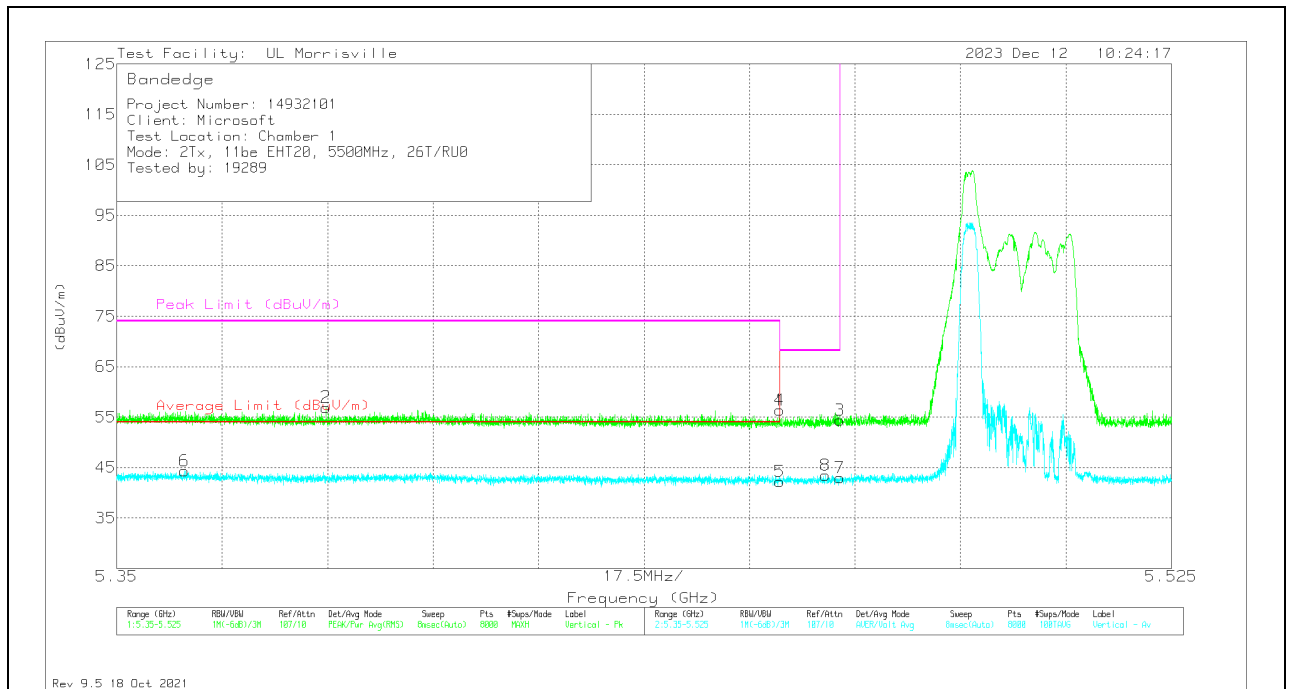


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	35.33	Pk	34.4	-23.3	10	56.43	-	-	74	-17.57	348	291	V
2	* ** 5.38472	35.53	Pk	34.5	-23.1	10	56.93	-	-	74	-17.07	348	291	V
5	* ** 5.45998	21.16	ADV	34.4	-23.3	10	42.26	54	-11.74	-	-	348	291	V
6	* ** 5.36118	22.61	ADV	34.5	-22.8	10	44.31	54	-9.69	-	-	348	291	V
4	5.46	35.29	Pk	34.4	-23.3	10	56.39	-	-	68.2	-11.81	348	291	V
8	5.46762	22.36	ADV	34.4	-23.3	10	43.46	-	-	-	-	348	291	V
3	5.46998	33.21	Pk	34.4	-23.2	10	54.41	-	-	68.2	-13.79	348	291	V
7	5.46998	21.81	ADV	34.4	-23.2	10	43.01	-	-	-	-	348	291	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

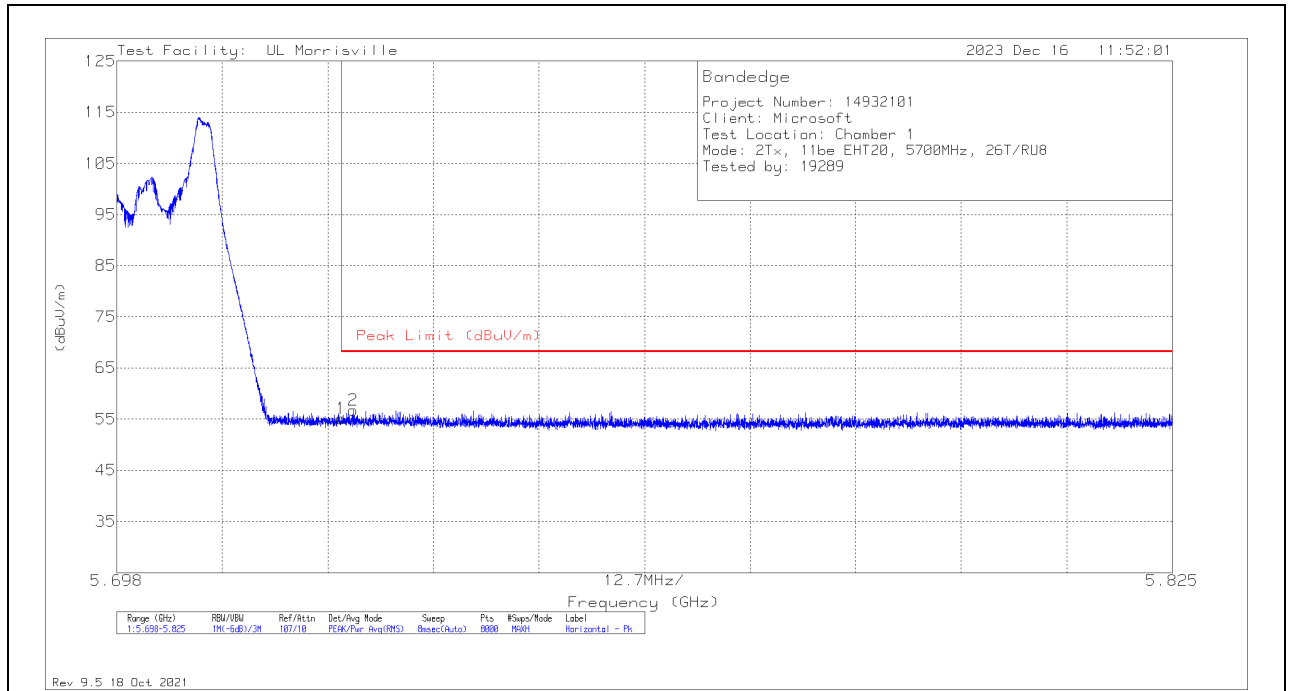

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.69	Pk	34.5	-23	10	55.19	68.2	-13.01	38	393	H
2	5.72642	35.1	Pk	34.5	-22.9	10	56.7	68.2	-11.5	38	393	H

Pk - Peak detector

**VERTICAL RESULT**

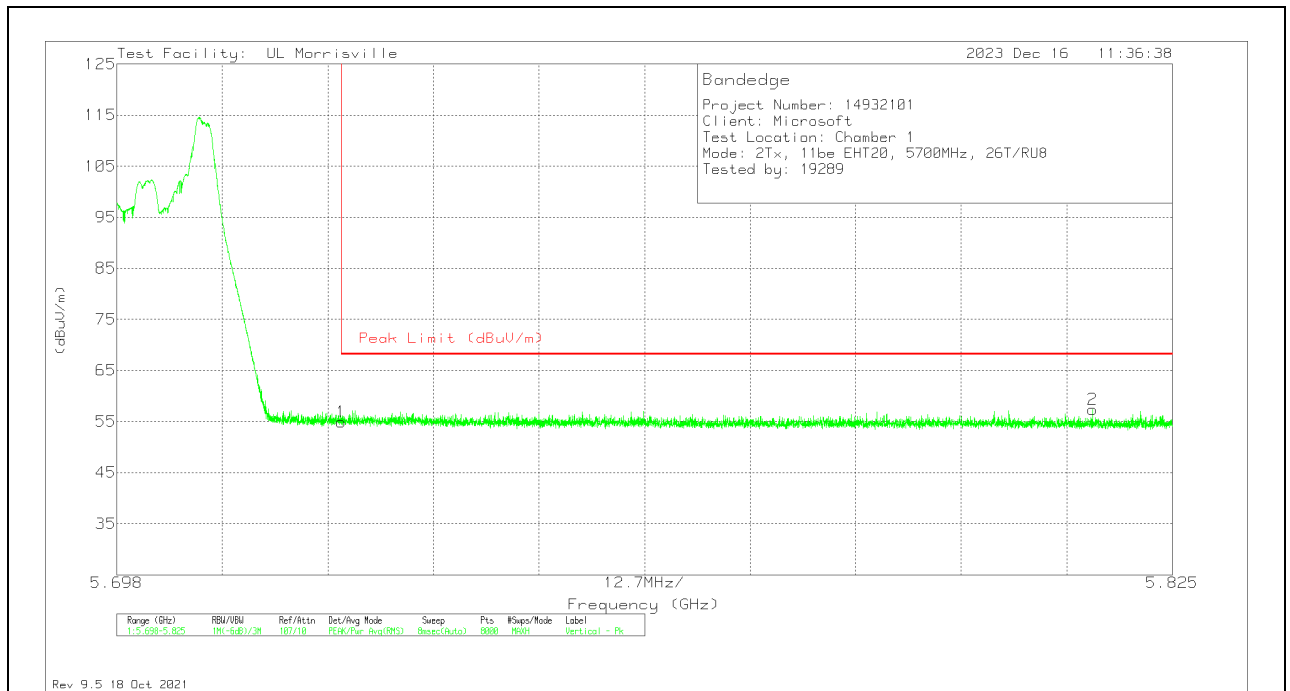


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.46	Pk	34.5	-23	10	54.96	68.2	-13.24	1	388	V
2	5.81541	35.71	Pk	34.7	-23.1	10	57.31	68.2	-10.89	1	388	V

Pk - Peak detector

**2TX CDD MODE – 52T**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

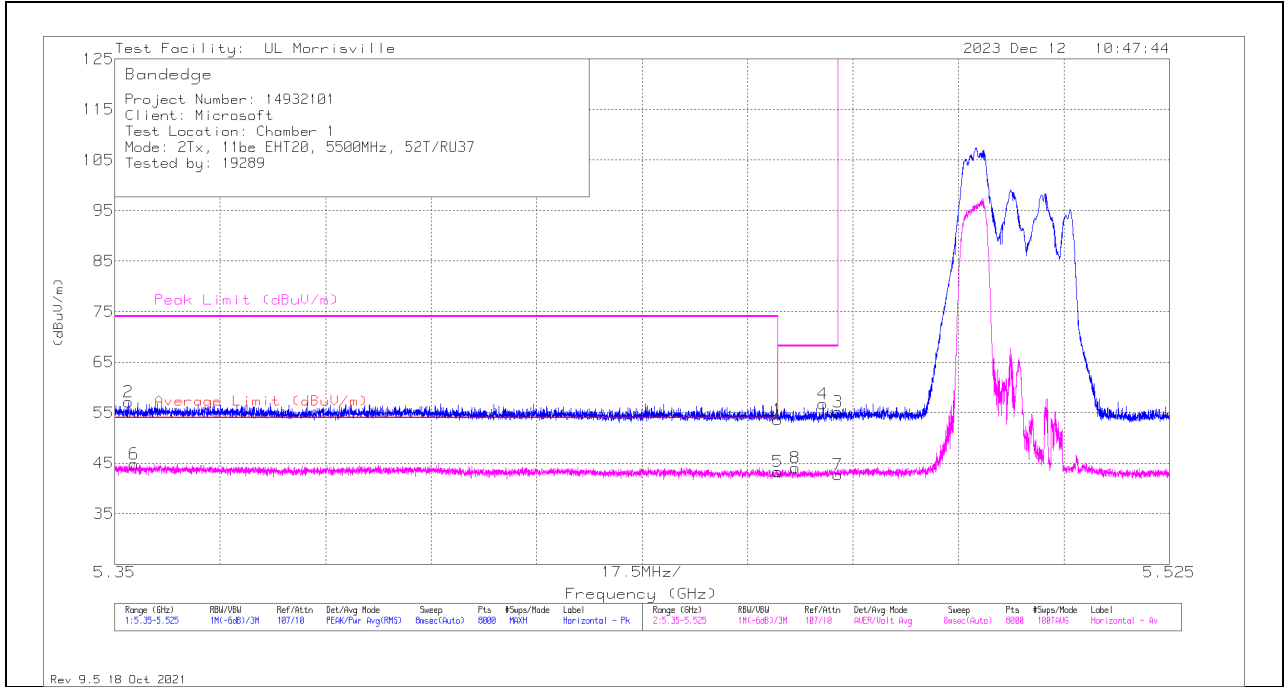


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.55	Pk	34.4	-23.3	10	53.65	-	-	74	-20.35	4	320	H
2	* ** 5.3523	35.33	Pk	34.5	-22.7	10	57.13	-	-	74	-16.87	4	320	H
5	* ** 5.45998	22.23	ADV	34.4	-23.3	10	43.33	54	-10.67	-	-	4	320	H
6	* ** 5.35324	23.07	ADV	34.5	-22.7	10	44.87	54	-9.13	-	-	4	320	H
8	5.46293	23.06	ADV	34.4	-23.4	10	44.06	-	-	-	-	4	320	H
4	5.46753	35.64	Pk	34.4	-23.3	10	56.74	-	-	68.2	-11.46	4	320	H
3	5.46998	33.91	Pk	34.4	-23.2	10	55.11	-	-	68.2	-13.09	4	320	H
7	5.46998	21.52	ADV	34.4	-23.2	10	42.72	-	-	-	-	4	320	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



### VERTICAL RESULT

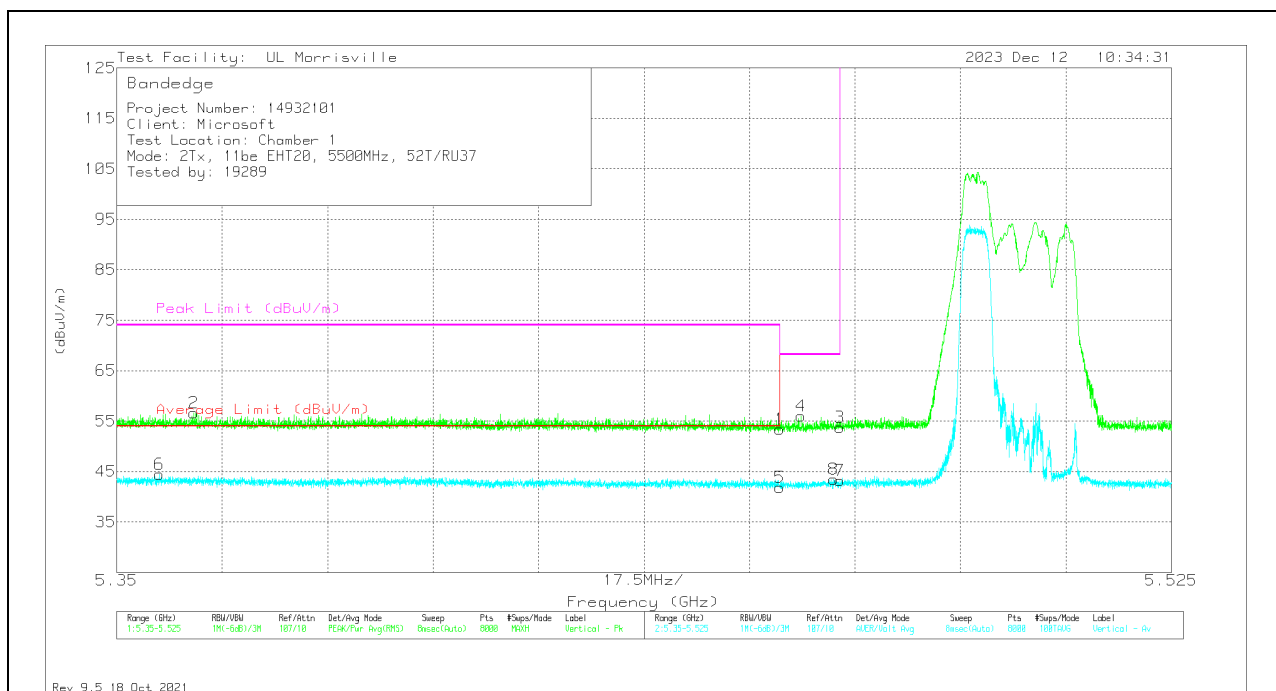

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.29	Pk	34.4	-23.3	10	53.39	-	-	74	-20.61	7	232	V
2	* ** 5.3628	34.9	Pk	34.5	-22.8	10	56.6	-	-	74	-17.4	7	232	V
5	* ** 5.45998	20.71	ADV	34.4	-23.3	10	41.81	54	-12.19	-	-	7	232	V
6	* ** 5.35707	22.66	ADV	34.5	-22.7	10	44.46	54	-9.54	-	-	7	232	V
4	5.46357	35.01	Pk	34.4	-23.4	10	56.01	-	-	68.2	-12.19	7	232	V
8	5.46891	22.38	ADV	34.4	-23.3	10	43.48	-	-	-	-	7	232	V
3	5.46998	32.55	Pk	34.4	-23.2	10	53.75	-	-	68.2	-14.45	7	232	V
7	5.46998	22.04	ADV	34.4	-23.2	10	43.24	-	-	-	-	7	232	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

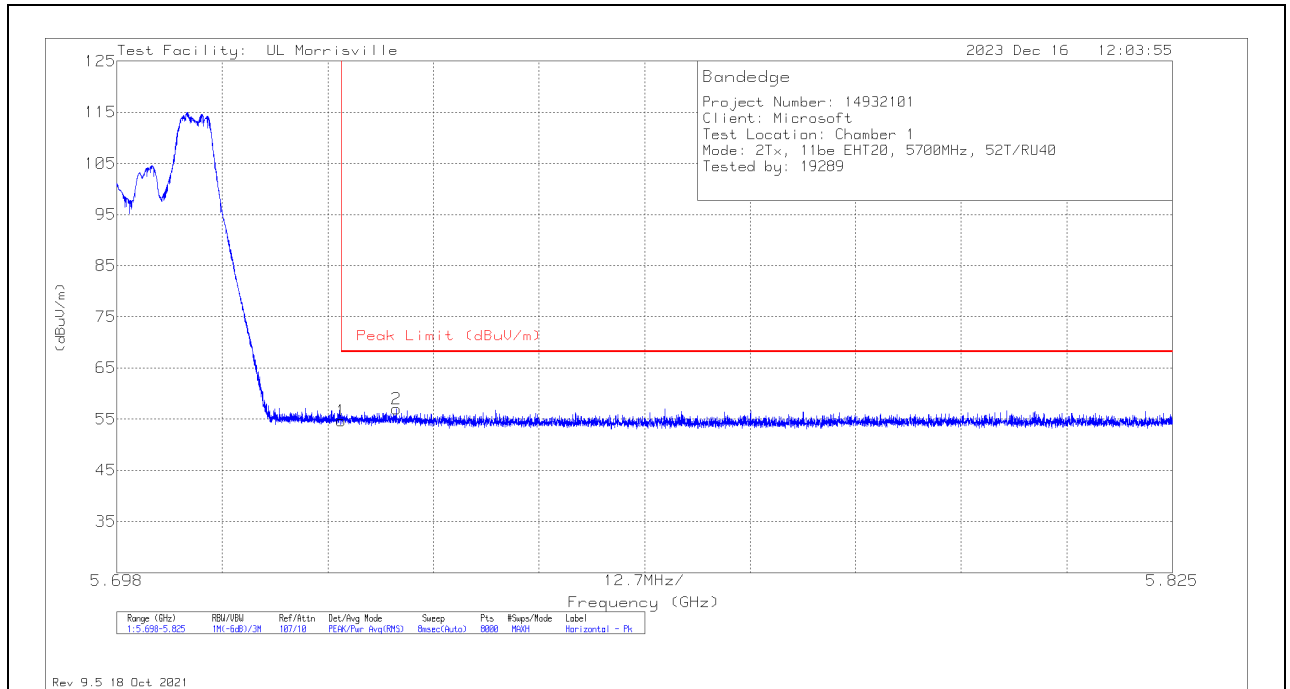

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.2	Pk	34.5	-23	10	54.7	68.2	-13.5	40	394	H
2	5.73164	35.53	Pk	34.5	-22.9	9.9	57.03	68.2	-11.17	40	394	H

Pk - Peak detector

**VERTICAL RESULT**

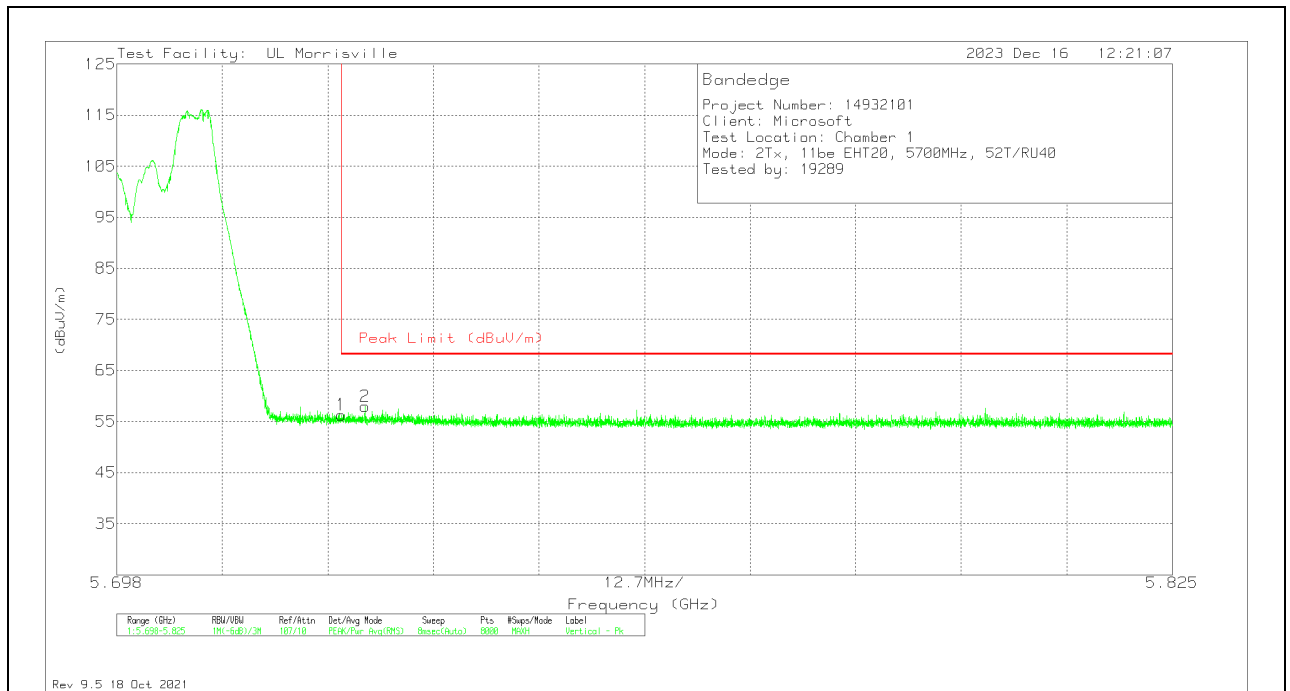


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	34.82	Pk	34.5	-23	10	56.32	68.2	-11.88	357	392	V
2	5.72788	36.33	Pk	34.5	-22.9	10	57.93	68.2	-10.27	357	392	V

Pk - Peak detector

**2TX CDD MODE – 52T+26T**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

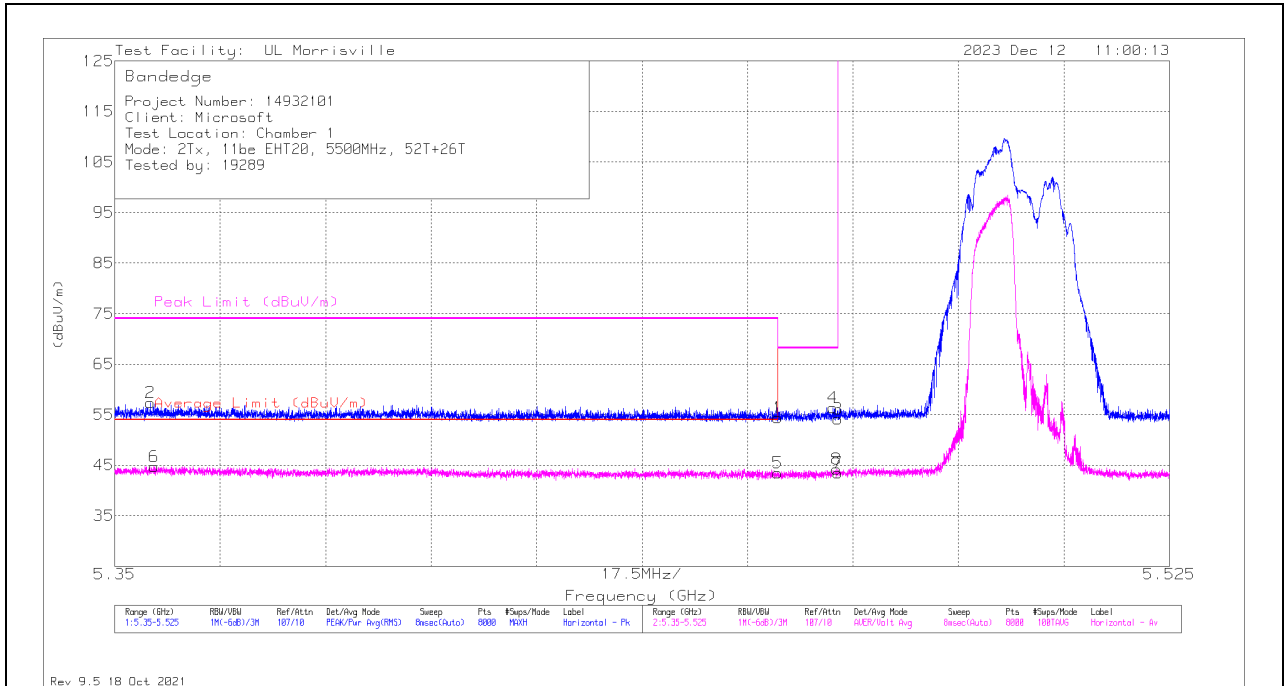

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.28	Pk	34.4	-23.3	10	54.38	-	-	74	-19.62	34	342	H
2	* ** 5.35591	35.53	Pk	34.5	-22.7	10	57.33	-	-	74	-16.67	34	342	H
5	* ** 5.45998	22.35	ADV	34.4	-23.3	10	43.45	54	-10.55	-	-	34	342	H
6	* ** 5.35654	22.96	ADV	34.5	-22.7	10	44.76	54	-9.24	-	-	34	342	H
4	5.46915	35.19	Pk	34.4	-23.2	10	56.39	-	-	68.2	-11.81	34	342	H
8	5.46978	23.03	ADV	34.4	-23.2	10	44.23	-	-	-	-	34	342	H
3	5.46998	32.94	Pk	34.4	-23.2	10	54.14	-	-	68.2	-14.06	34	342	H
7	5.46998	22.26	ADV	34.4	-23.2	10	43.46	-	-	-	-	34	342	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

### VERTICAL RESULT

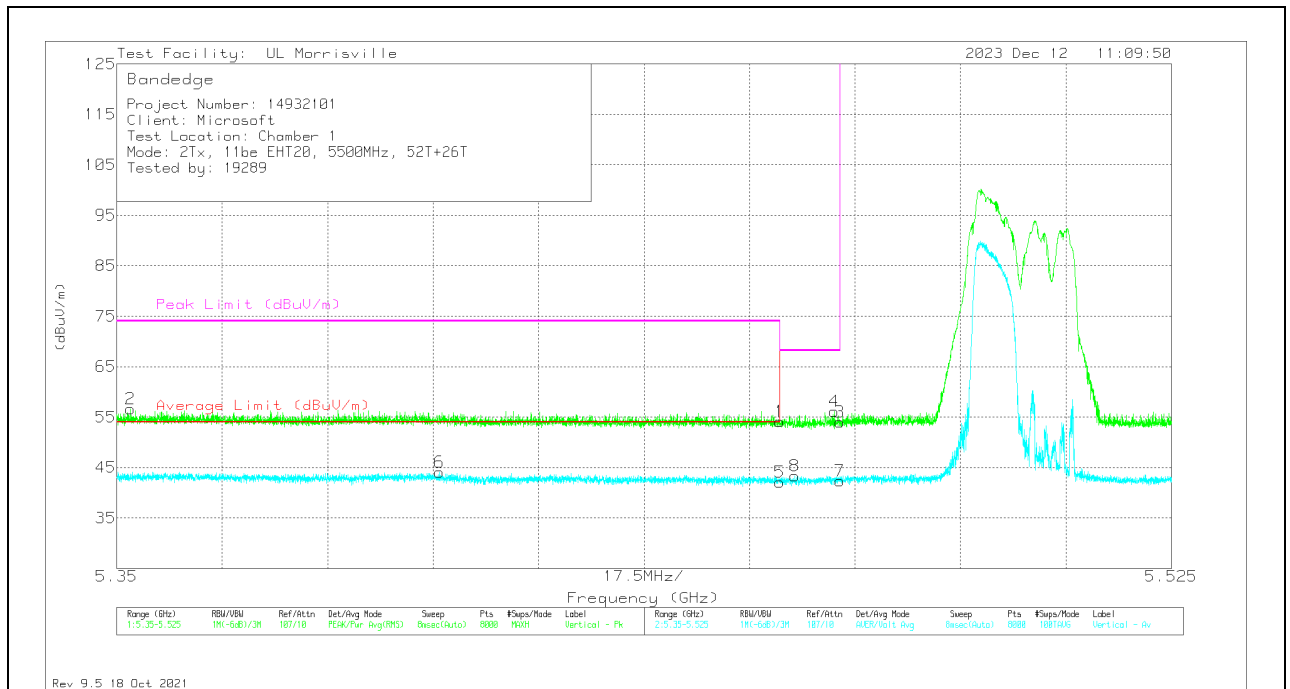

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33	Pk	34.4	-23.3	10	54.1	-	-	74	-19.9	10	277	V
2	* ** 5.3523	34.8	Pk	34.5	-22.7	10	56.6	-	-	74	-17.4	10	277	V
5	* ** 5.45998	20.98	ADV	34.4	-23.3	10	42.08	54	-11.92	-	-	10	277	V
6	* ** 5.40356	22.61	ADV	34.5	-23	10	44.11	54	-9.89	-	-	10	277	V
8	5.4625	22.35	ADV	34.4	-23.4	10	43.35	-	-	-	-	10	277	V
4	5.46906	34.89	Pk	34.4	-23.2	10	56.09	-	-	68.2	-12.11	10	277	V
3	5.46998	32.85	Pk	34.4	-23.2	10	54.05	-	-	68.2	-14.15	10	277	V
7	5.46998	21.18	ADV	34.4	-23.2	10	42.38	-	-	-	-	10	277	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

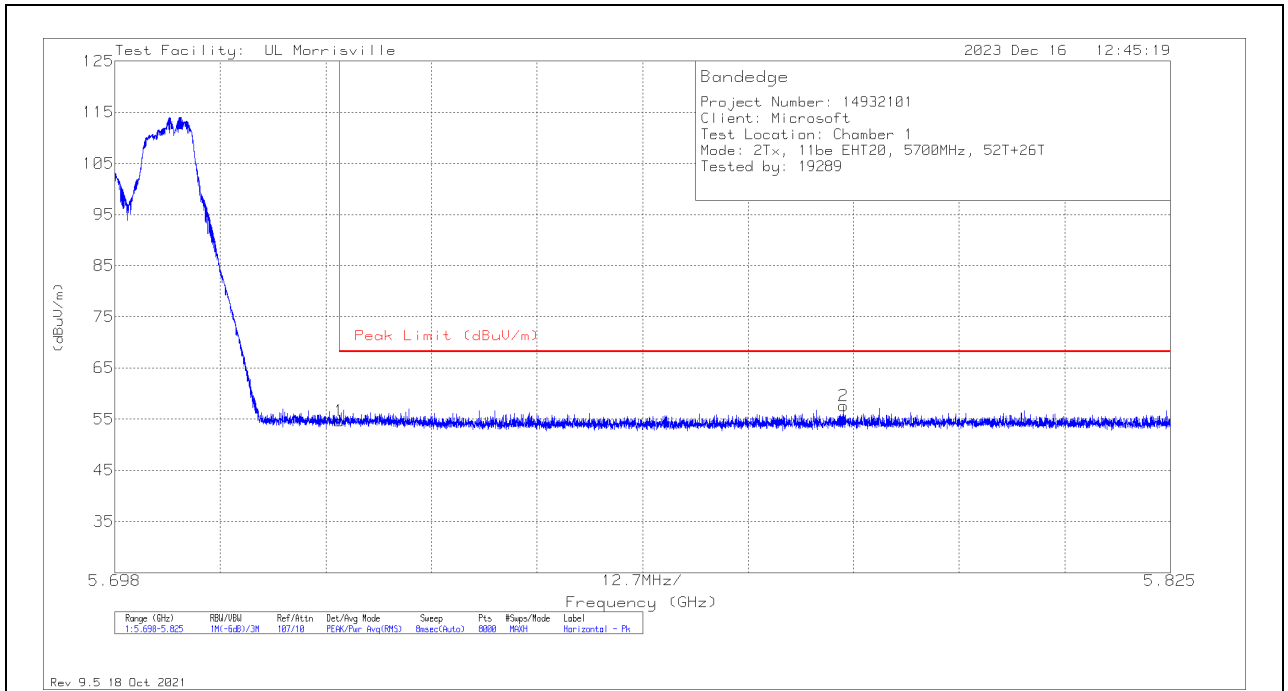

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.16	Pk	34.5	-23	10	54.66	68.2	-13.54	34	396	H
2	5.78566	35.95	Pk	34.7	-23	10	57.65	68.2	-10.55	34	396	H

Pk - Peak detector

**VERTICAL RESULT**

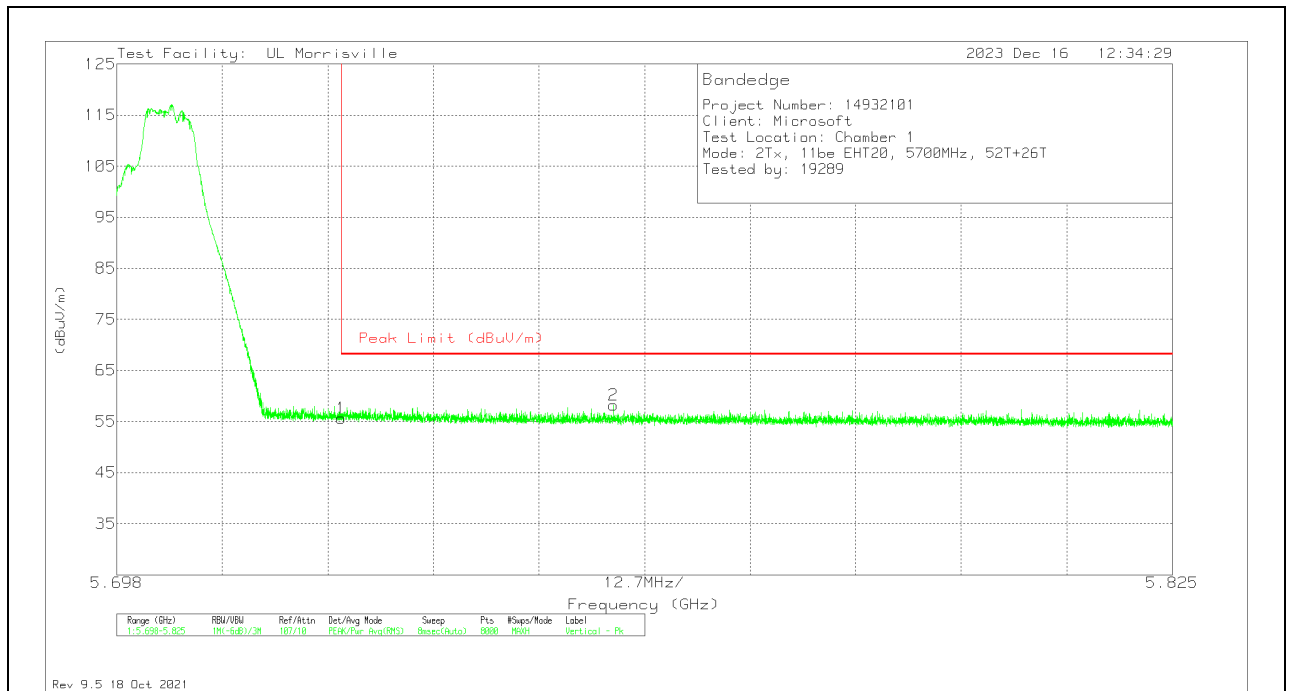


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	34.12	Pk	34.5	-23	10	55.62	68.2	-12.58	357	259	V
2	5.75775	36.77	Pk	34.6	-23.2	10	58.17	68.2	-10.03	357	259	V

Pk - Peak detector

**2TX CDD MODE – 106T**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

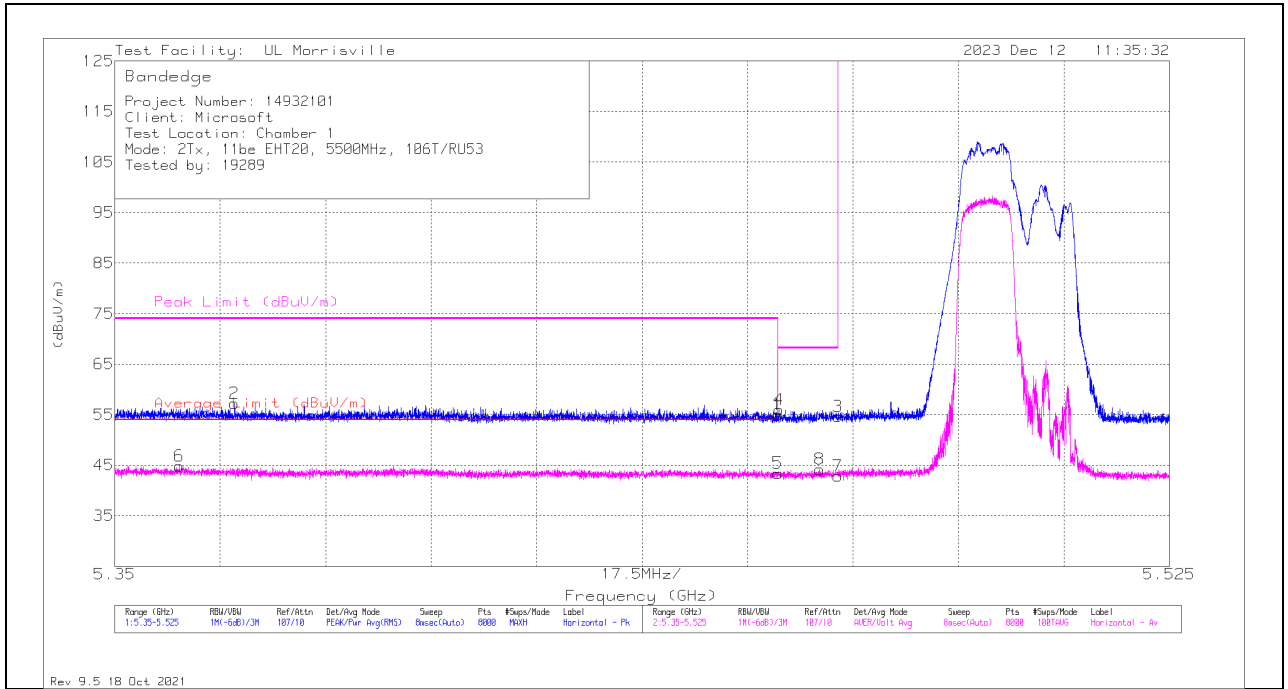


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.9	Pk	34.4	-23.3	10	55	-	-	74	-19	8	346	H
2	* ** 5.36989	35.69	Pk	34.5	-22.9	10	57.29	-	-	74	-16.71	8	346	H
5	* ** 5.45998	22.3	ADV	34.4	-23.3	10	43.4	54	-10.6	-	-	8	346	H
6	* ** 5.36072	23.05	ADV	34.5	-22.7	10	44.85	54	-9.15	-	-	8	346	H
4	5.46024	34.91	Pk	34.4	-23.3	10	56.01	-	-	68.2	-12.19	8	346	H
8	5.46694	23.05	ADV	34.4	-23.3	10	44.15	-	-	-	-	8	346	H
3	5.46998	33.39	Pk	34.4	-23.2	10	54.59	-	-	68.2	-13.61	8	346	H
7	5.46998	21.6	ADV	34.4	-23.2	10	42.8	-	-	-	-	8	346	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



### VERTICAL RESULT

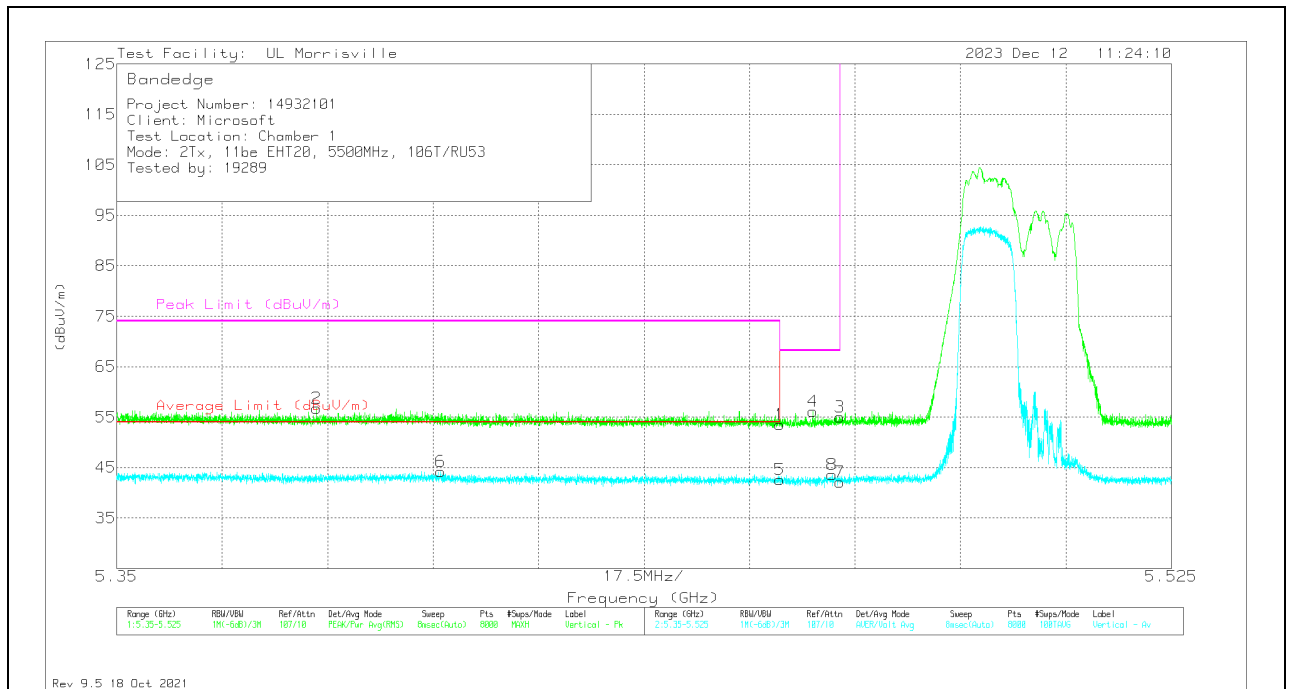


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.38	Pk	34.4	-23.3	10	53.48	-	-	74	-20.52	346	205	V
2	* ** 5.38317	35.39	Pk	34.5	-23.1	10	56.79	-	-	74	-17.21	346	205	V
5	* ** 5.45998	21.5	ADV	34.4	-23.3	10	42.6	54	-11.4	-	-	346	205	V
6	* ** 5.4038	22.67	ADV	34.5	-23	10	44.17	54	-9.83	-	-	346	205	V
4	5.46554	35.12	Pk	34.4	-23.4	10	56.12	-	-	68.2	-12.08	346	205	V
8	5.46869	22.48	ADV	34.4	-23.3	10	43.58	-	-	-	-	346	205	V
3	5.46998	33.84	Pk	34.4	-23.2	10	55.04	-	-	68.2	-13.16	346	205	V
7	5.46998	20.88	ADV	34.4	-23.2	10	42.08	-	-	-	-	346	205	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

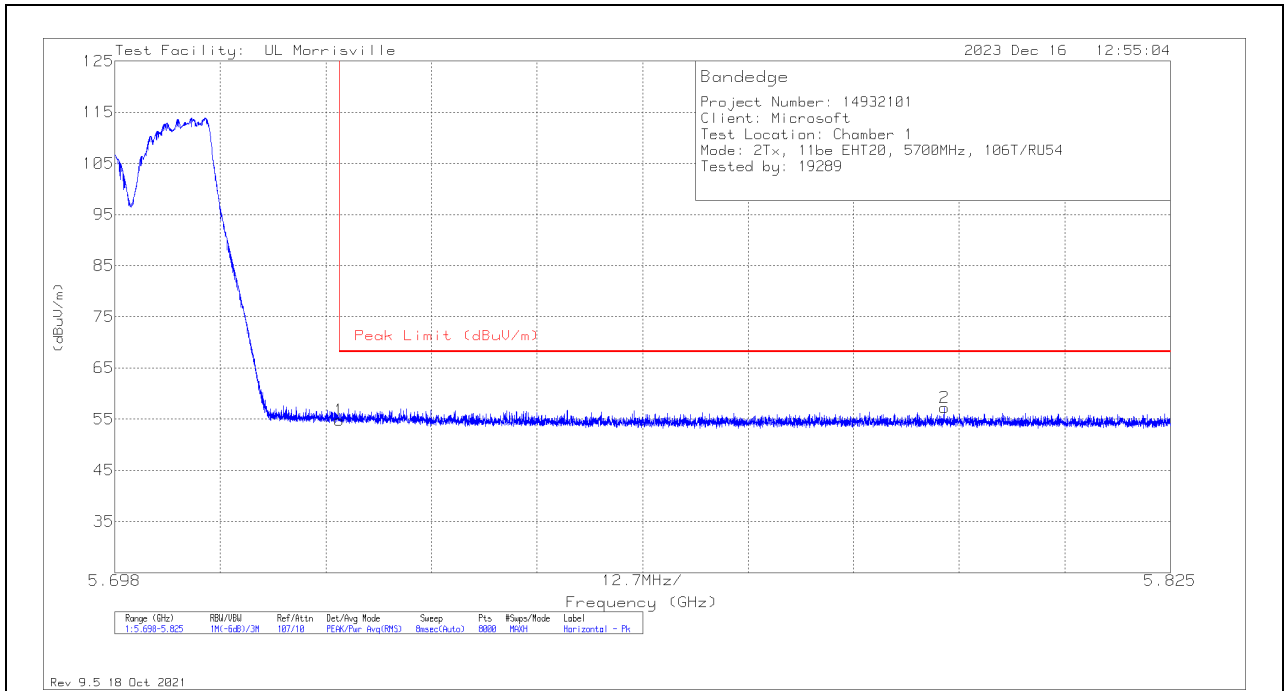

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.28	Pk	34.5	-23	10	54.78	68.2	-13.42	26	394	H
2	5.79785	35.49	Pk	34.7	-23	10	57.19	68.2	-11.01	26	394	H

Pk - Peak detector

**VERTICAL RESULT**

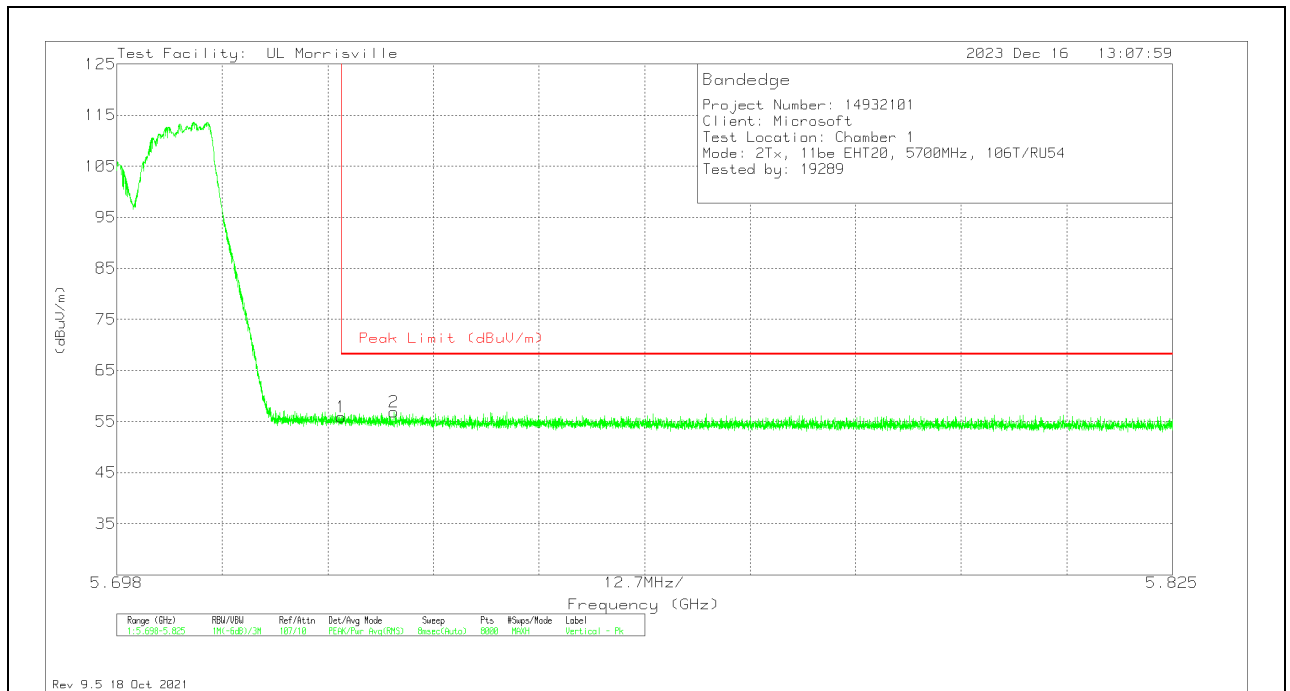


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	34.35	Pk	34.5	-23	10	55.85	68.2	-12.35	356	388	V
2	5.73133	35.36	Pk	34.5	-22.9	9.9	56.86	68.2	-11.34	356	388	V

Pk - Peak detector

**2TX CDD MODE – 106T+26T**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

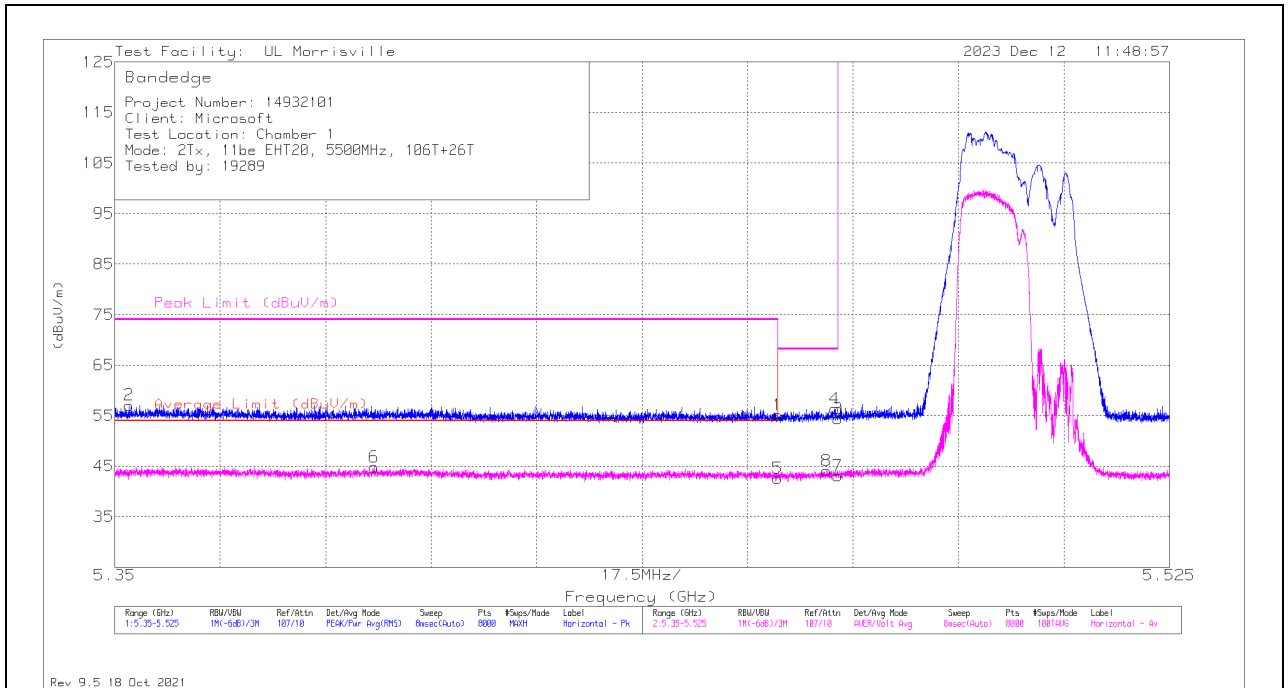

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	34.03	Pk	34.4	-23.3	10	55.13	-	-	74	-18.87	11	306	H
2	* ** 5.35236	35.26	Pk	34.5	-22.7	10	57.06	-	-	74	-16.94	11	306	H
5	* ** 5.45998	21.55	ADV	34.4	-23.3	10	42.65	54	-11.35	-	-	11	306	H
6	* ** 5.39299	23.36	ADV	34.5	-23	10	44.86	54	-9.14	-	-	11	306	H
8	5.46814	23	ADV	34.4	-23.3	10	44.1	-	-	-	-	11	306	H
4	5.4695	35.2	Pk	34.4	-23.2	10	56.4	-	-	68.2	-11.8	11	306	H
3	5.46998	33.23	Pk	34.4	-23.2	10	54.43	-	-	68.2	-13.77	11	306	H
7	5.46998	21.93	ADV	34.4	-23.2	10	43.13	-	-	-	-	11	306	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

### VERTICAL RESULT

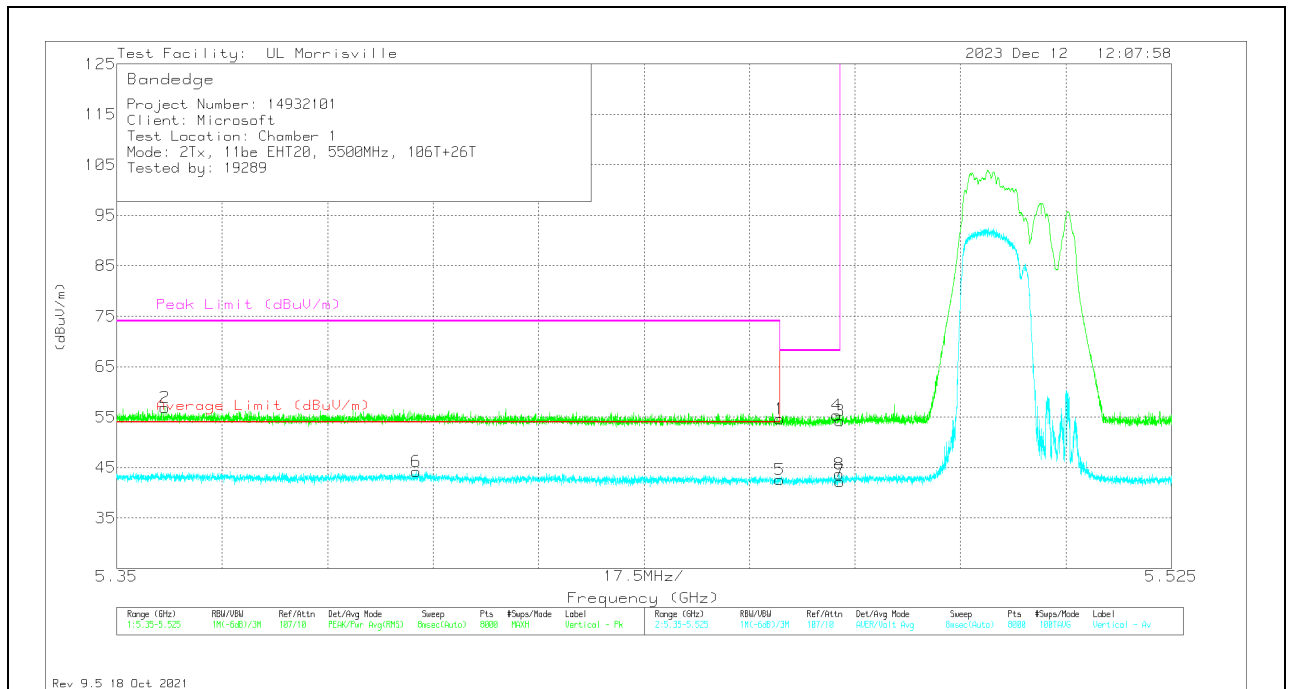

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.59	Pk	34.4	-23.3	10	54.69	-	-	74	-19.31	329	224	V
2	* ** 5.35801	35.08	Pk	34.5	-22.7	10	56.88	-	-	74	-17.12	329	224	V
5	* ** 5.45998	21.47	ADV	34.4	-23.3	10	42.57	54	-11.43	-	-	329	224	V
6	* ** 5.39966	22.65	ADV	34.5	-22.9	10	44.25	54	-9.75	-	-	329	224	V
4	5.4695	34.17	Pk	34.4	-23.2	10	55.37	-	-	68.2	-12.83	329	224	V
8	5.46985	22.47	ADV	34.4	-23.2	10	43.67	-	-	-	-	329	224	V
3	5.46998	33.03	Pk	34.4	-23.2	10	54.23	-	-	68.2	-13.97	329	224	V
7	5.46998	21.08	ADV	34.4	-23.2	10	42.28	-	-	-	-	329	224	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

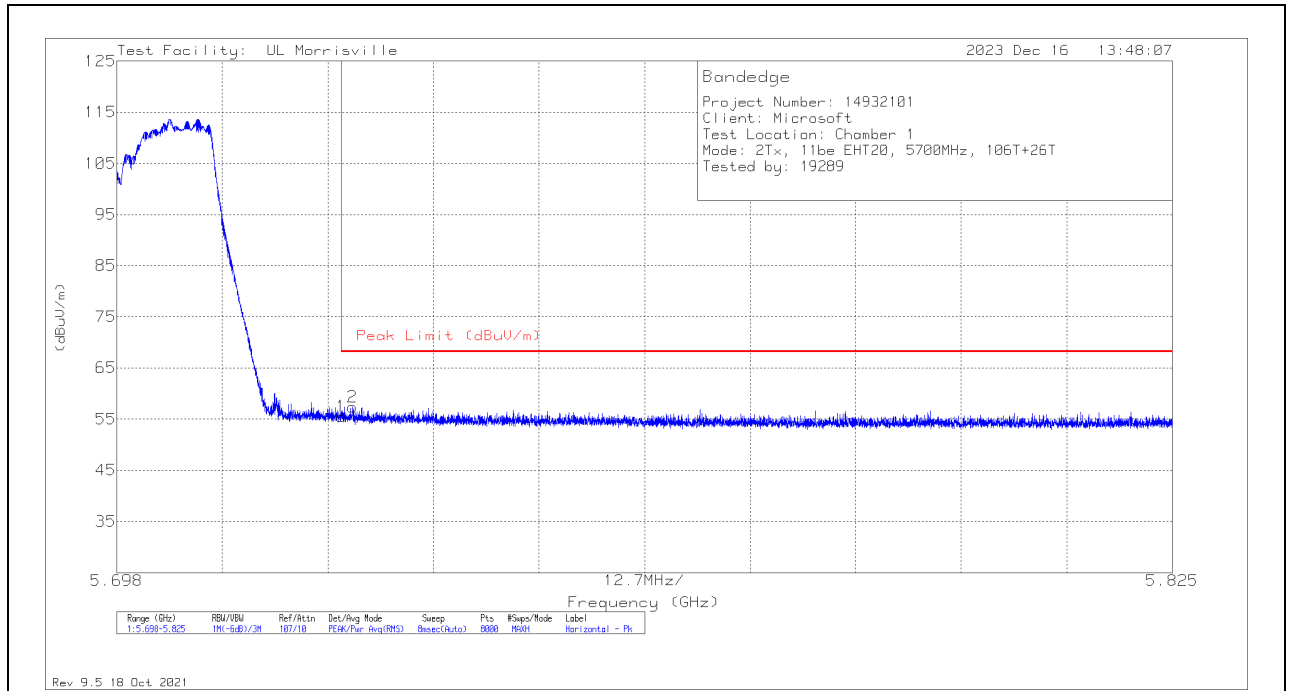

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	34.06	Pk	34.5	-23	10	55.56	68.2	-12.64	38	390	H
2	5.72639	35.78	Pk	34.5	-22.9	10	57.38	68.2	-10.82	38	390	H

Pk - Peak detector

**VERTICAL RESULT**

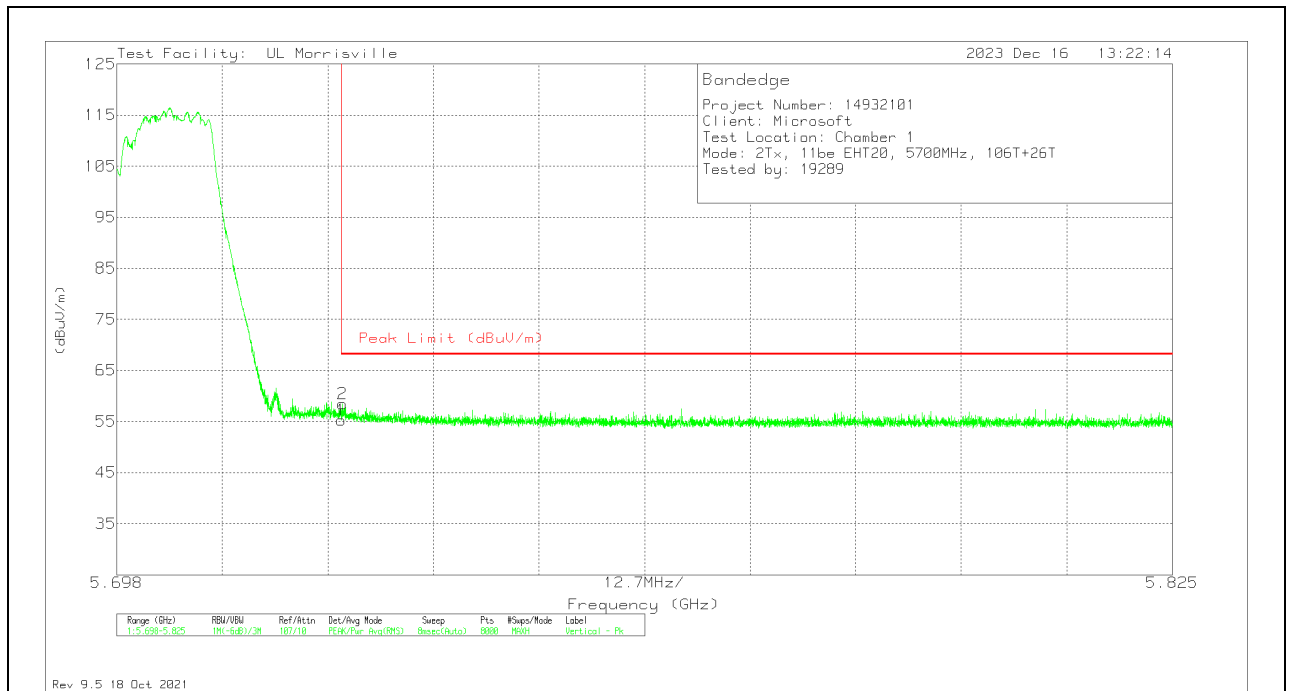


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.79	Pk	34.5	-23	10	55.29	68.2	-12.91	0	391	V
2	5.72515	37	Pk	34.5	-23	10	58.5	68.2	-9.7	0	391	V

Pk - Peak detector

**2TX CDD MODE – 242T**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

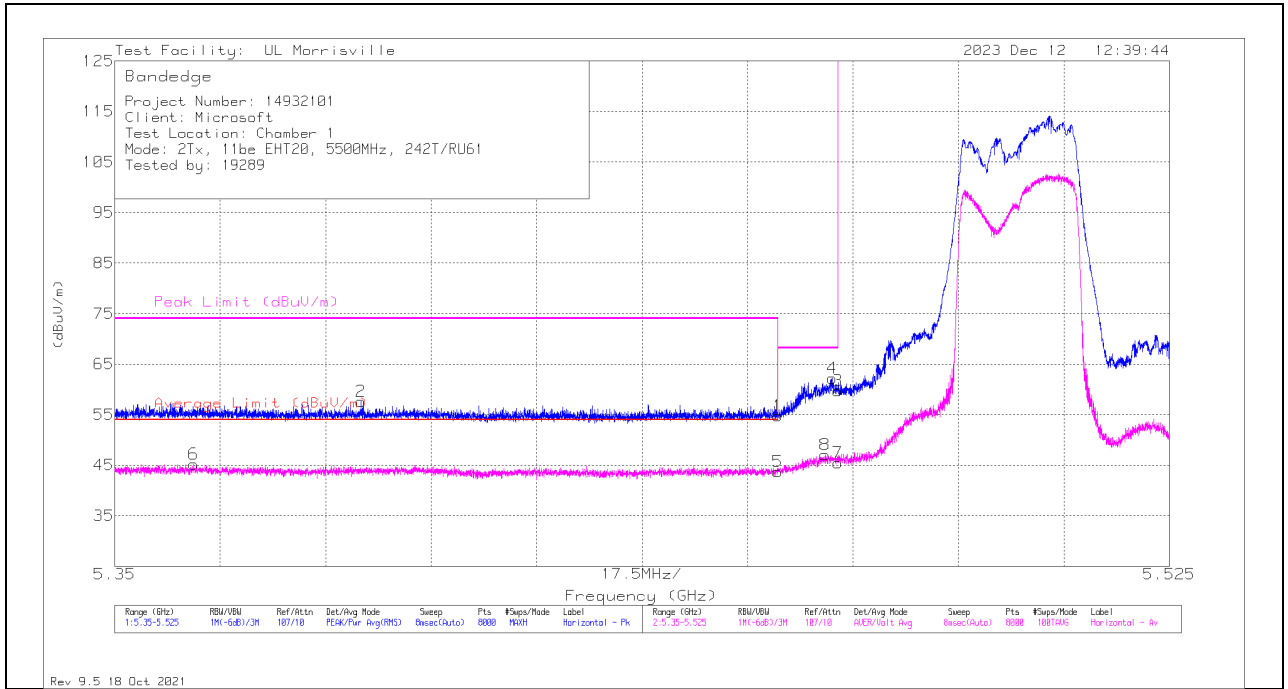


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	33.61	Pk	34.4	-23.3	10	54.71	-	-	74	-19.29	32	382	H
2	* ** 5.39087	36.11	Pk	34.5	-23	10	57.61	-	-	74	-16.39	32	382	H
5	* ** 5.45998	22.6	ADV	34.4	-23.3	10	43.7	54	-10.3	-	-	32	382	H
6	* ** 5.36308	23.45	ADV	34.5	-22.8	10	45.15	54	-8.85	-	-	32	382	H
8	5.46786	25.98	ADV	34.4	-23.3	10	47.08	-	-	-	-	32	382	H
4	5.46908	41.01	Pk	34.4	-23.2	10	62.21	-	-	68.2	-5.99	32	382	H
3	5.46998	38.48	Pk	34.4	-23.2	10	59.68	-	-	68.2	-8.52	32	382	H
7	5.46998	24.29	ADV	34.4	-23.2	10	45.49	-	-	-	-	32	382	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



**VERTICAL RESULT**

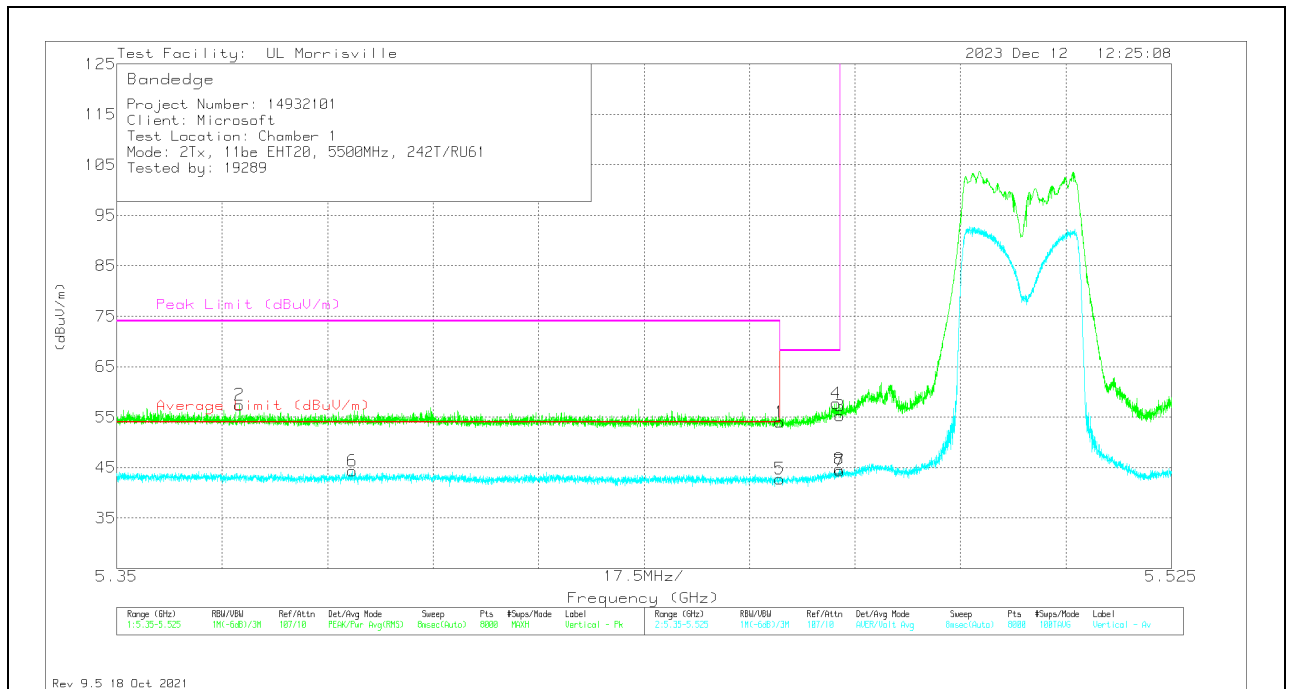


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	32.97	Pk	34.4	-23.3	10	54.07	-	-	74	-19.93	7	227	V
2	* ** 5.37041	35.83	Pk	34.5	-22.9	10	57.43	-	-	74	-16.57	7	227	V
5	* ** 5.45998	21.68	ADV	34.4	-23.3	10	42.78	54	-11.22	-	-	7	227	V
6	* ** 5.3891	22.85	ADV	34.5	-23	10	44.35	54	-9.65	-	-	7	227	V
4	5.46934	36.55	Pk	34.4	-23.2	10	57.75	-	-	68.2	-10.45	7	227	V
8	5.46991	23.49	ADV	34.4	-23.2	10	44.69	-	-	-	-	7	227	V
3	5.46998	34.08	Pk	34.4	-23.2	10	55.28	-	-	68.2	-12.92	7	227	V
7	5.46998	23.11	ADV	34.4	-23.2	10	44.31	-	-	-	-	7	227	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

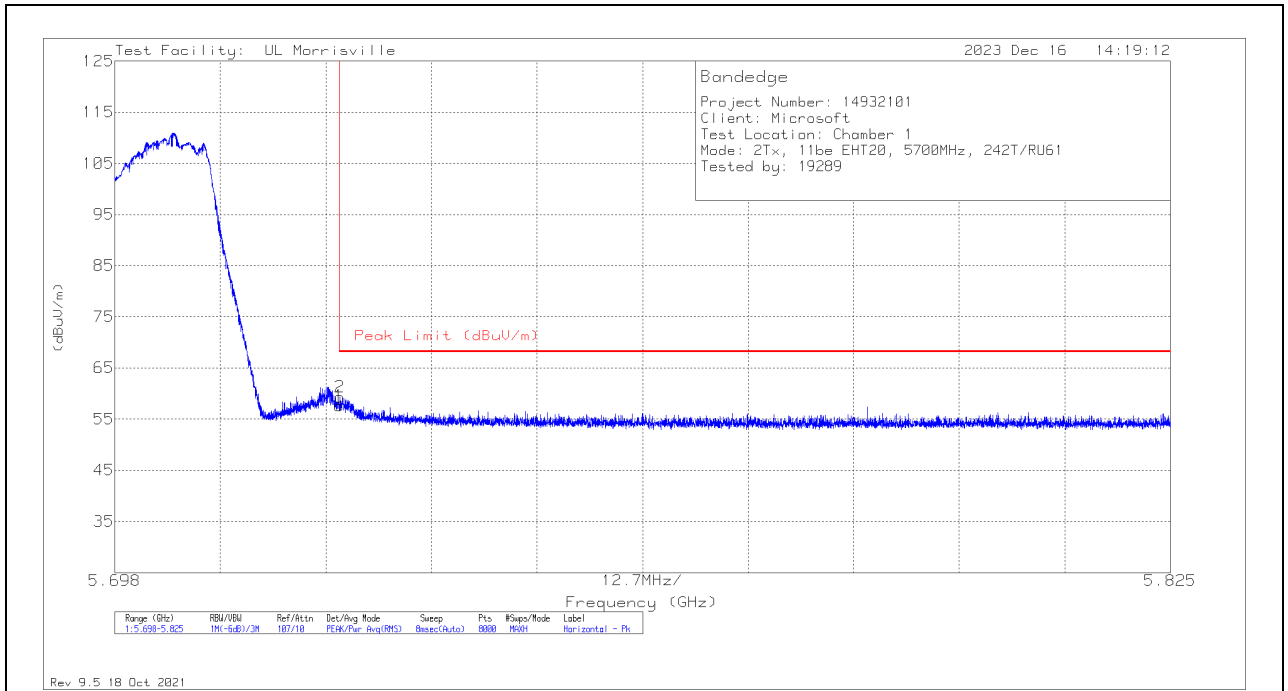

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	36.13	Pk	34.5	-23	10	57.63	68.2	-10.57	46	391	H
2	5.7251	37.8	Pk	34.5	-23	10	59.3	68.2	-8.9	46	391	H

Pk - Peak detector

### VERTICAL RESULT

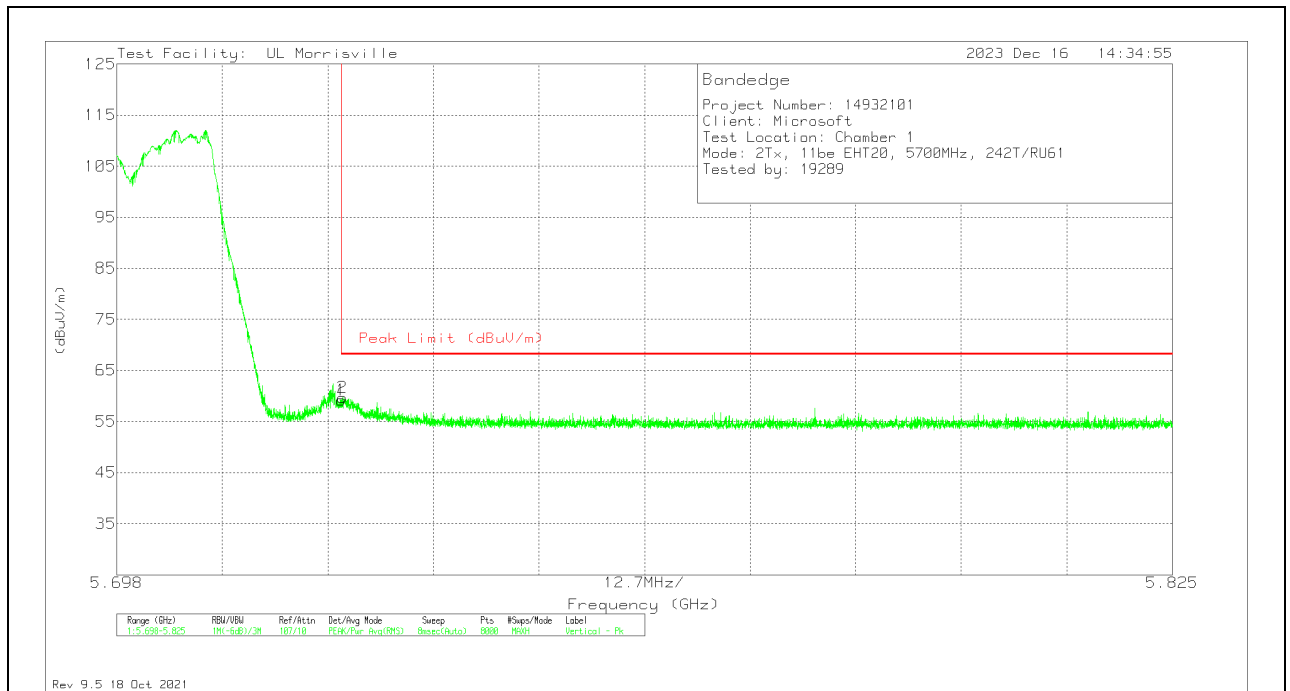

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	37.74	Pk	34.5	-23	10	59.24	68.2	-8.96	356	391	V
2	5.72513	38.19	Pk	34.5	-23	10	59.69	68.2	-8.51	356	391	V


Pk - Peak detector

### 11.1.23. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE 5.6 GHz BAND

#### 2TX CDD MODE – 484T

#### BANDEDGE (LOW CHANNEL)


#### HORIZONTAL RESULT

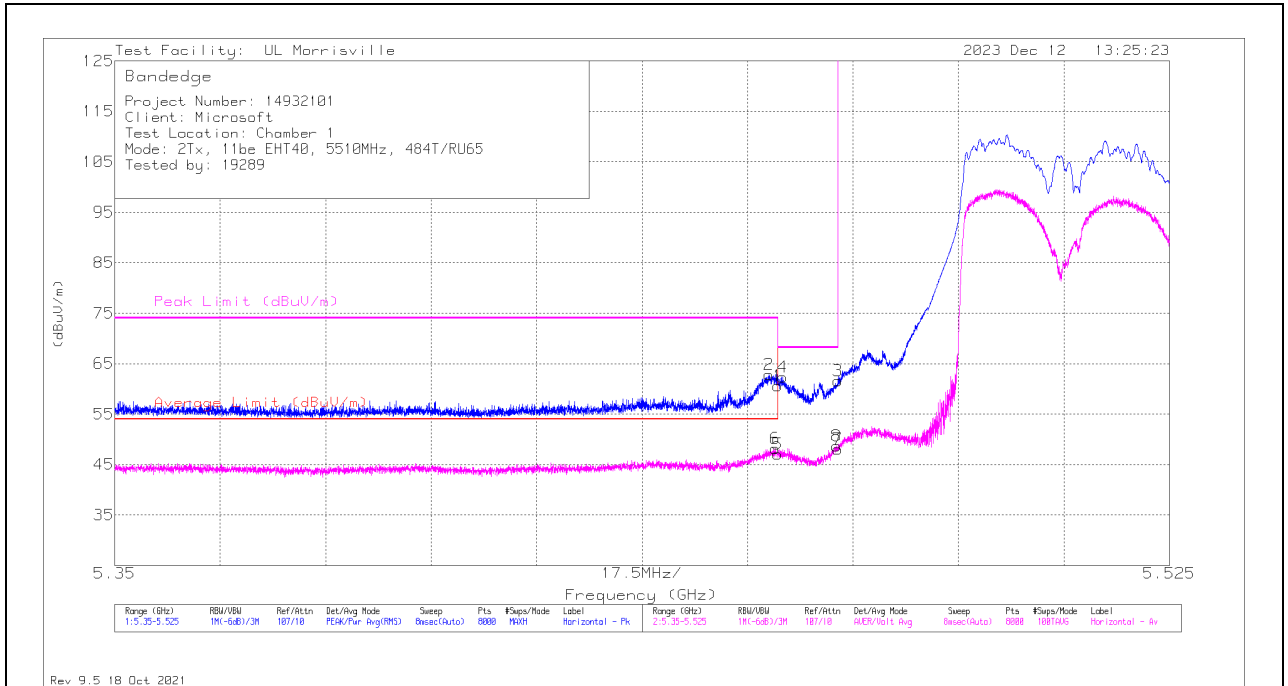

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	39.51	Pk	34.4	-23.3	10	60.61	-	-	74	-13.39	25	386	H
2	* ** 5.45854	41.78	Pk	34.4	-23.3	10	62.88	-	-	74	-11.12	25	386	H
5	* ** 5.45998	26	ADV	34.4	-23.3	10	47.1	54	-6.9	-	-	25	386	H
6	* ** 5.45963	27.06	ADV	34.4	-23.3	10	48.16	54	-5.84	-	-	25	386	H
4	5.46081	41.28	Pk	34.4	-23.3	10	62.38	-	-	68.2	-5.82	25	386	H
8	5.46974	27.43	ADV	34.4	-23.2	10	48.63	-	-	-	-	25	386	H
3	5.46998	40.38	Pk	34.4	-23.2	10	61.58	-	-	68.2	-6.62	25	386	H
7	5.46998	26.85	ADV	34.4	-23.2	10	48.05	-	-	-	-	25	386	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**VERTICAL RESULT**

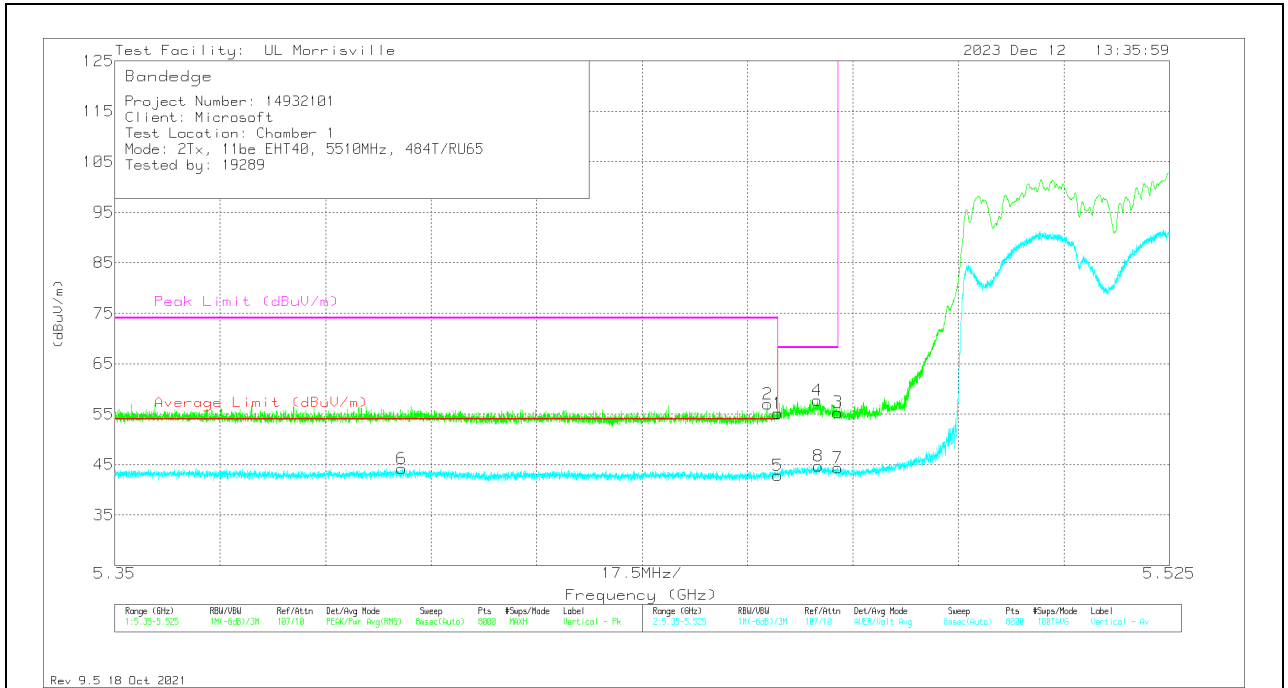


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarit y
1	* ** 5.45998	34.04	Pk	34.4	-23.3	10	55.14	-	-	74	-18.86	3	239	V
2	* ** 5.45834	35.94	Pk	34.4	-23.3	10	57.04	-	-	74	-16.96	3	239	V
5	* ** 5.45998	21.69	ADV	34.4	-23.3	10	42.79	54	-11.21	-	-	3	239	V
6	* ** 5.39758	22.66	ADV	34.5	-22.9	10	44.26	54	-9.74	-	-	3	239	V
4	5.46659	36.69	Pk	34.4	-23.3	10	57.79	-	-	68.2	-10.41	3	239	V
8	5.46672	23.61	ADV	34.4	-23.3	10	44.71	-	-	-	-	3	239	V
3	5.46998	34.12	Pk	34.4	-23.2	10	55.32	-	-	68.2	-12.88	3	239	V
7	5.46998	23.1	ADV	34.4	-23.2	10	44.3	-	-	-	-	3	239	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

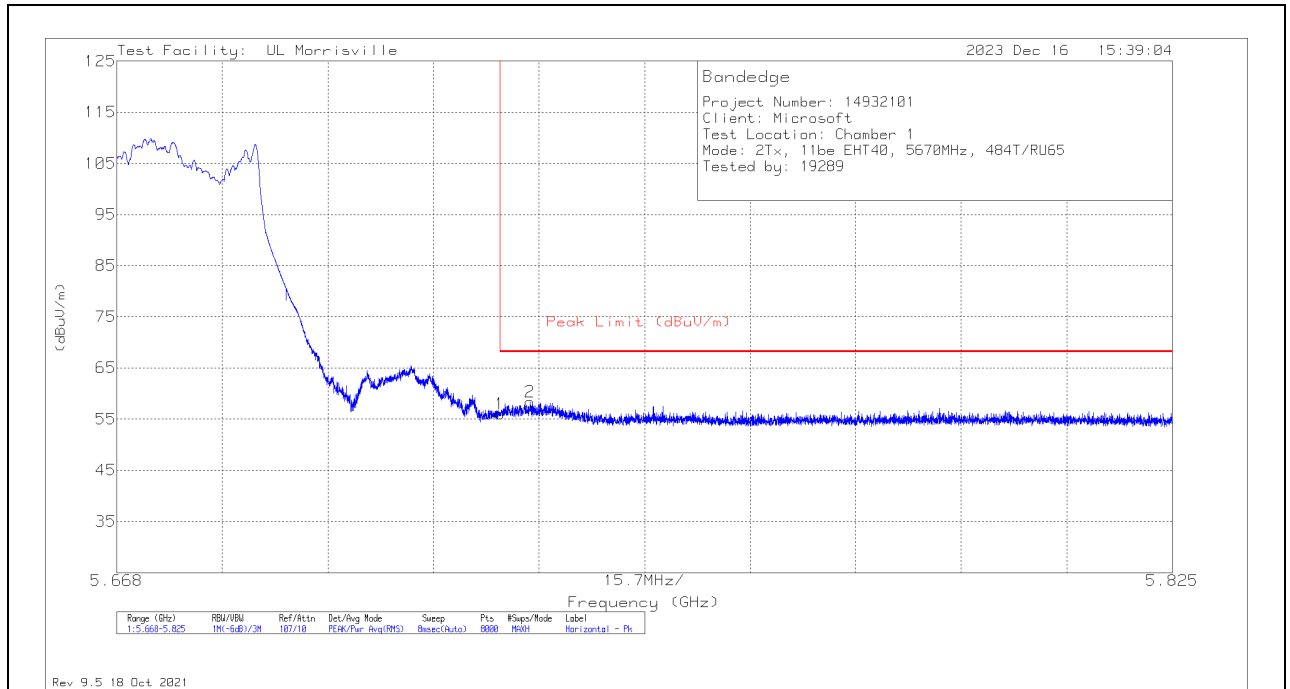

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	34.53	Pk	34.5	-23	10	56.03	68.2	-12.17	37	336	H
2	5.72951	36.9	Pk	34.5	-22.9	9.9	58.4	68.2	-9.8	37	336	H

Pk - Peak detector

**VERTICAL RESULT**

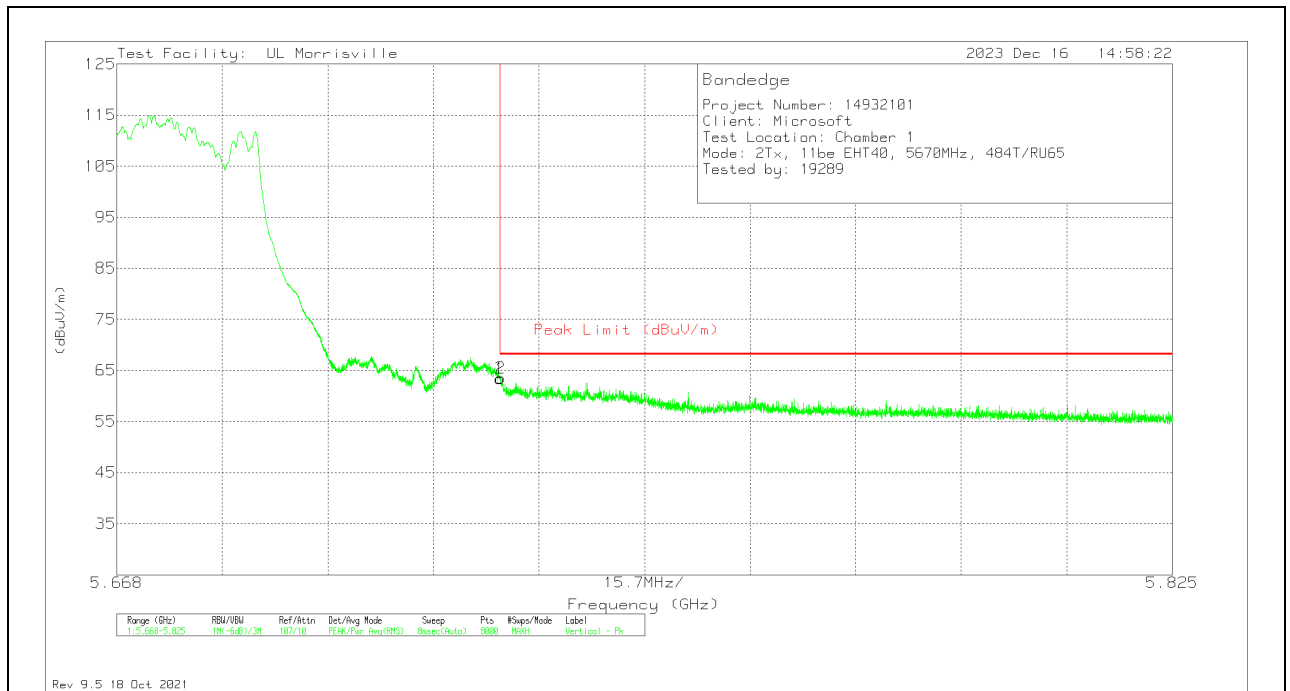

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	41.85	Pk	34.5	-23	10	63.35	68.2	-4.85	355	200	V
2	5.72511	41.99	Pk	34.5	-23	10	63.49	68.2	-4.71	355	200	V


Pk - Peak detector

### 11.1.24. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE 5.6 GHz BAND

#### 2TX CDD MODE – 484T+242T (CONTIGUOUS)

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

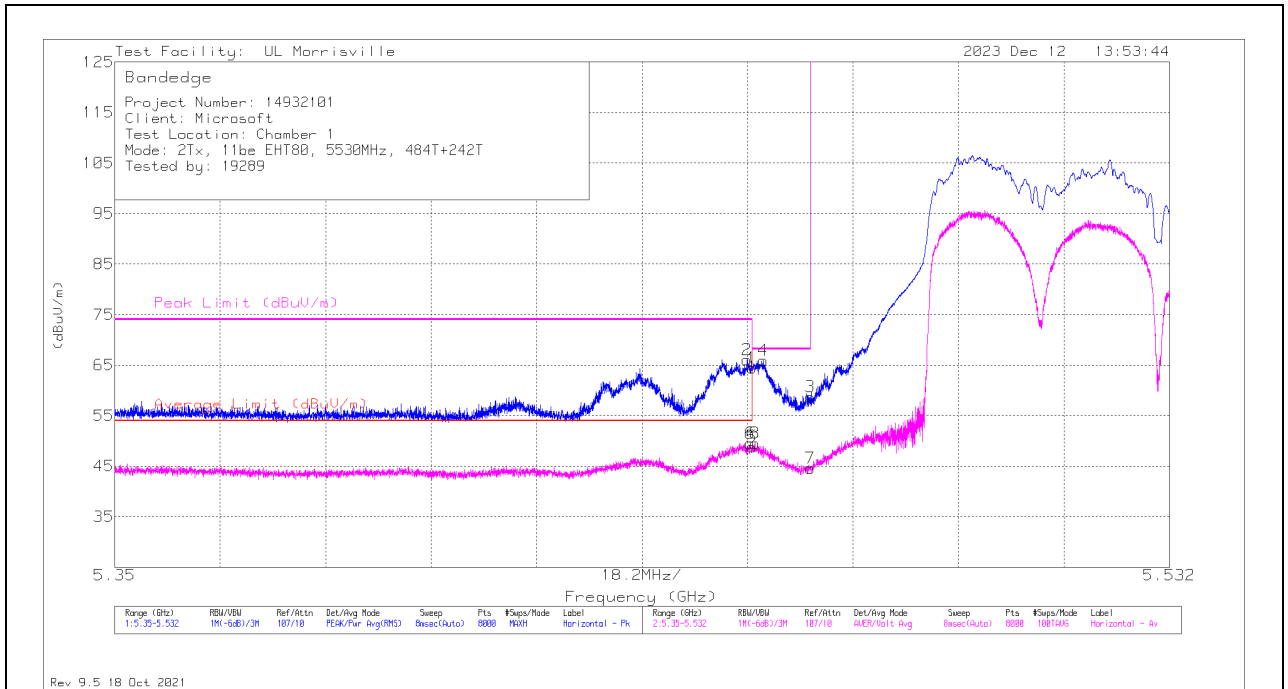

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	43.4	Pk	34.4	-23.3	10	64.5	-	-	74	-9.5	19	385	H
2	* ** 5.45906	45	Pk	34.4	-23.3	10	66.1	-	-	74	-7.9	19	385	H
5	* ** 5.45999	27.76	ADV	34.4	-23.3	10	48.86	54	-5.14	-	-	19	385	H
6	* ** 5.45969	28.4	ADV	34.4	-23.3	10	49.5	54	-4.5	-	-	19	385	H
8	5.46047	28.39	ADV	34.4	-23.3	10	49.49	-	-	-	-	19	385	H
4	5.4619	44.88	Pk	34.4	-23.3	10	65.98	-	-	68.2	-2.22	19	385	H
3	5.47	37.49	Pk	34.4	-23.2	10	58.69	-	-	68.2	-9.51	19	385	H
7	5.47	23.42	ADV	34.4	-23.2	10	44.62	-	-	-	-	19	385	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average



**VERTICAL RESULT**

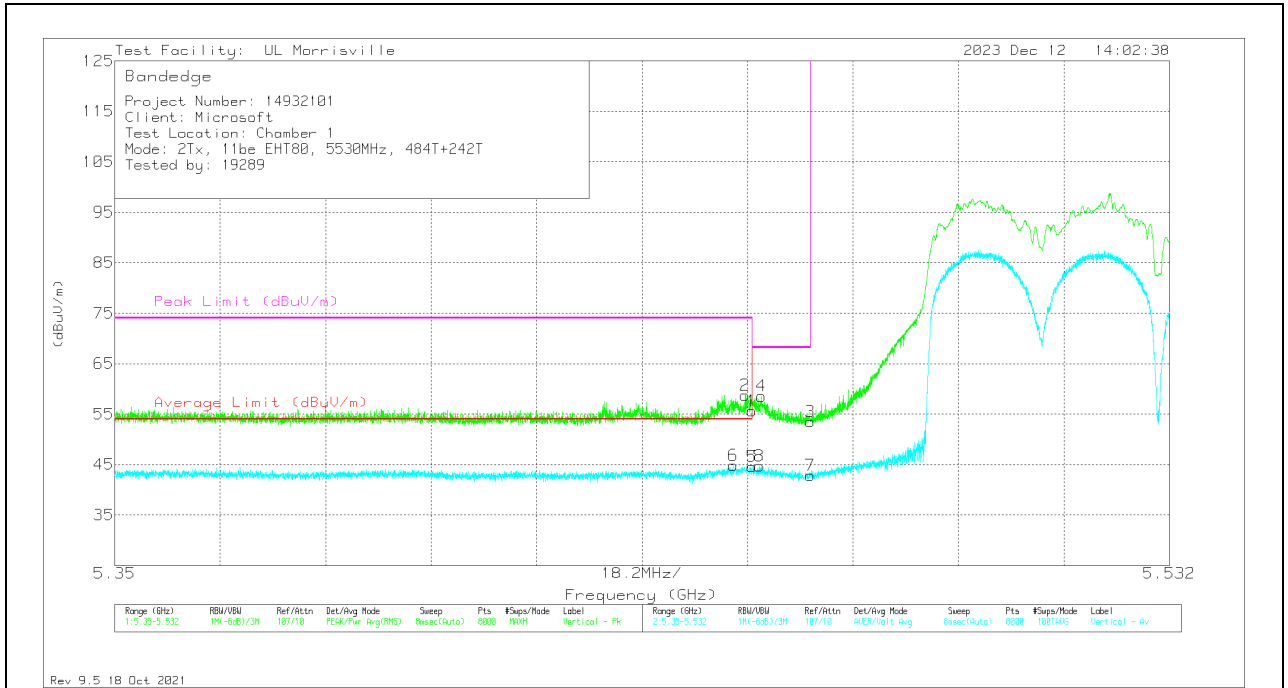


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	34.58	Pk	34.4	-23.3	10	55.68	-	-	74	-18.32	10	262	V
2	* ** 5.45883	37.69	Pk	34.4	-23.3	10	58.79	-	-	74	-15.21	10	262	V
5	* ** 5.45999	23.43	ADV	34.4	-23.3	10	44.53	54	-9.47	-	-	10	262	V
6	* ** 5.45676	23.68	ADV	34.4	-23.2	10	44.88	54	-9.12	-	-	10	262	V
8	5.46122	23.58	ADV	34.4	-23.3	10	44.68	-	-	-	-	10	262	V
4	5.46158	37.45	Pk	34.4	-23.3	10	58.55	-	-	68.2	-9.65	10	262	V
3	5.47	32.35	Pk	34.4	-23.2	10	53.55	-	-	68.2	-14.65	10	262	V
7	5.47	21.67	ADV	34.4	-23.2	10	42.87	-	-	-	-	10	262	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

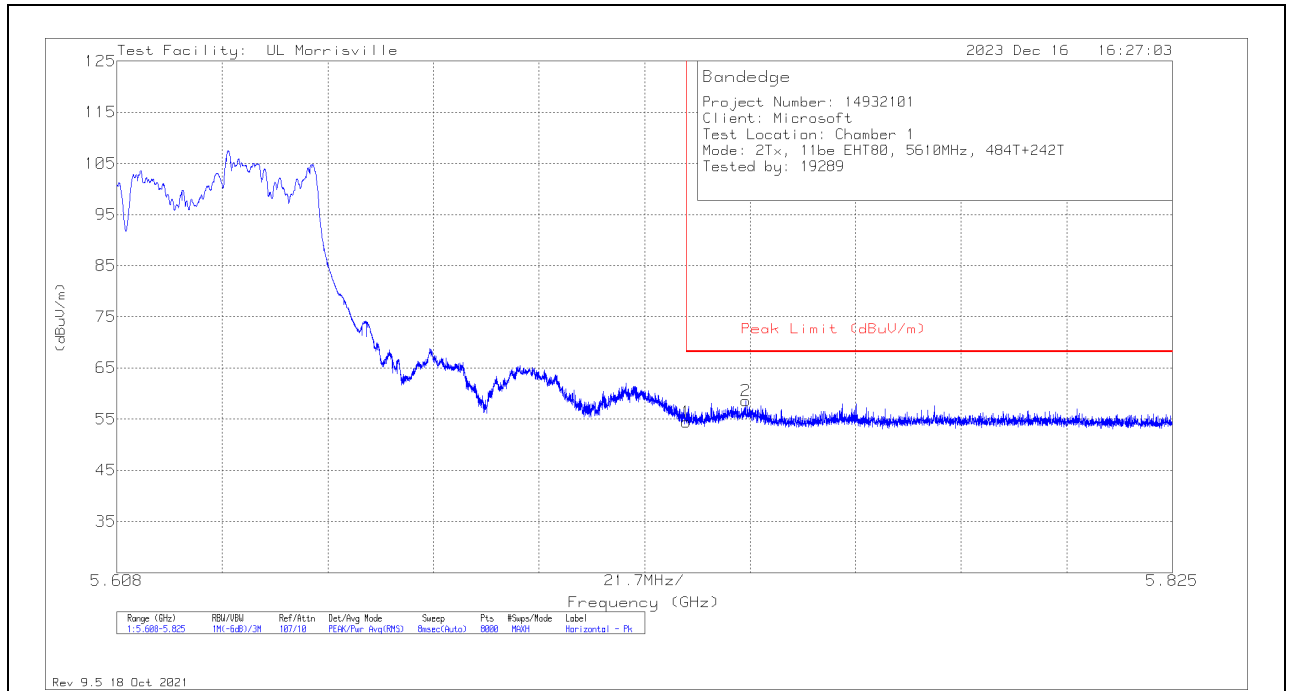

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	32.92	Pk	34.5	-23	10	54.42	68.2	-13.78	6	377	H
2	5.73735	37.27	Pk	34.5	-23.1	9.9	58.57	68.2	-9.63	6	377	H

Pk - Peak detector

**VERTICAL RESULT**

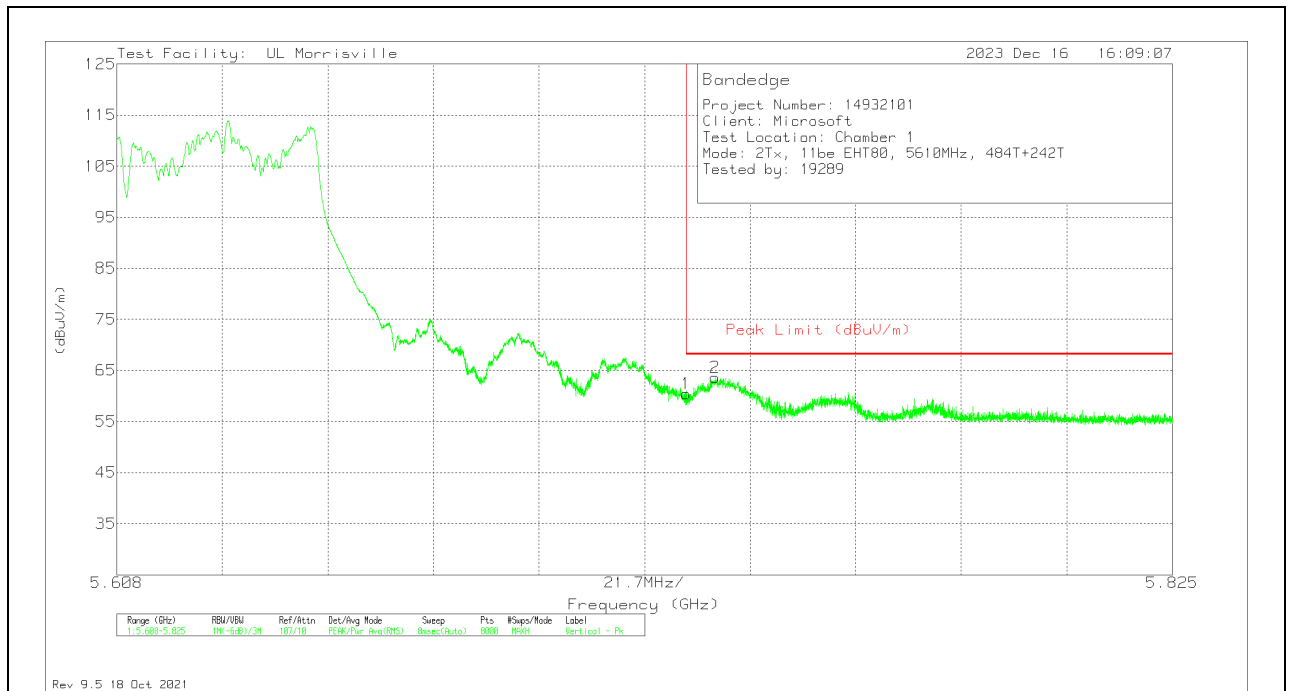


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.96	Pk	34.5	-23	10	60.46	68.2	-7.74	342	218	V
2	5.73097	42.13	Pk	34.5	-22.9	9.9	63.63	68.2	-4.57	342	218	V


Pk - Peak detector

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

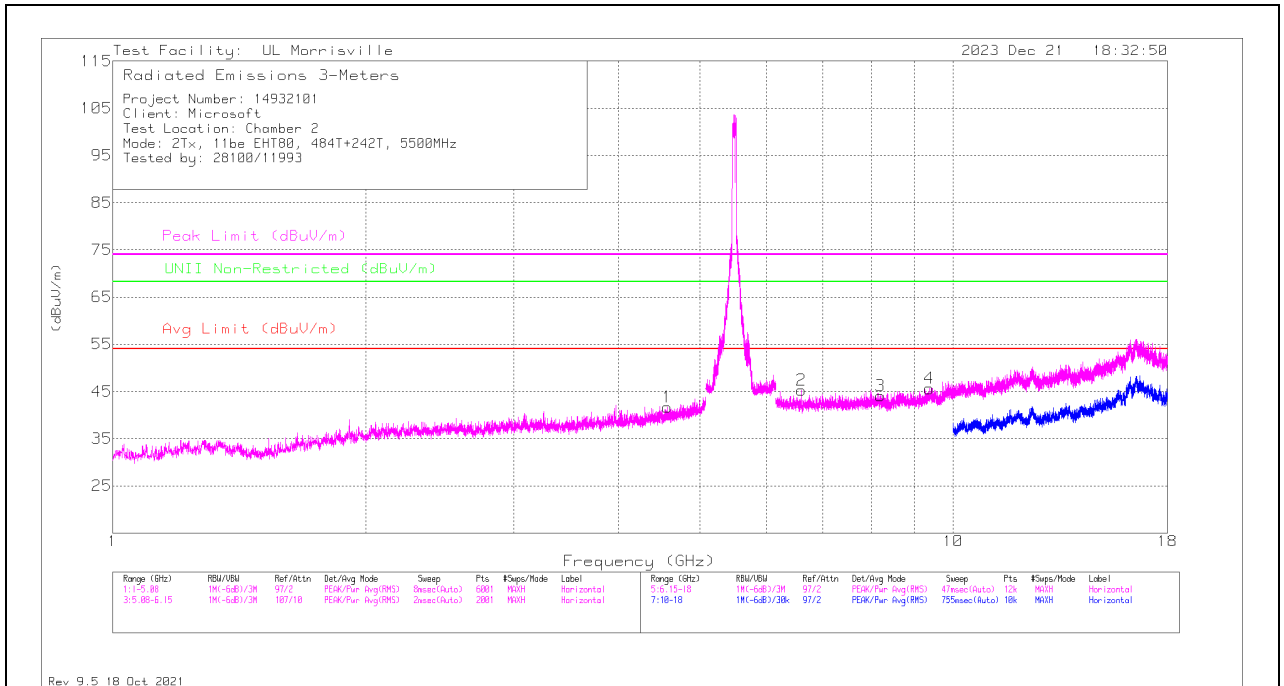

**HORIZONTAL**

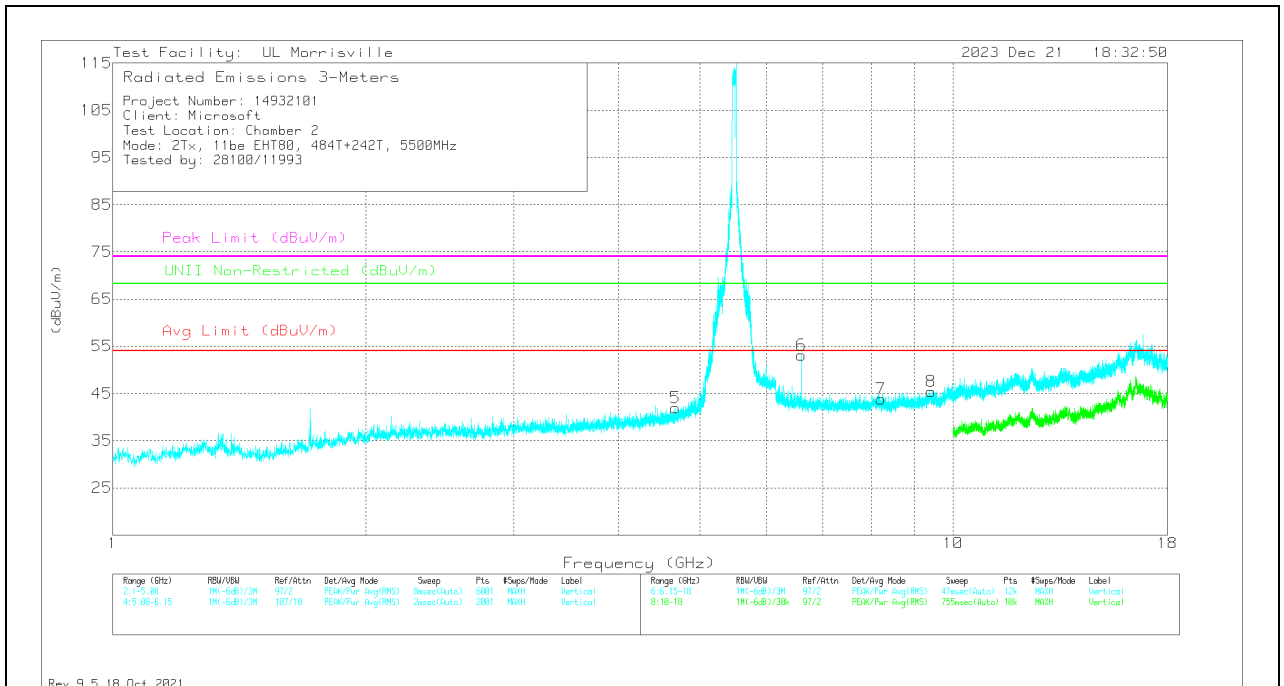

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.57136	38.49	Pk	34	-30.8	41.69	54	-12.31	74	-32.31	-	-	0-360	101	H
5	*** 4.67472	38.24	Pk	34.1	-30.4	41.94	54	-12.06	74	-32.06	-	-	0-360	199	V
3	*** 8.19116	35	Pk	35.8	-26.7	44.1	54	-9.9	74	-29.9	-	-	0-360	101	H
4	*** 9.37419	35.01	Pk	36.1	-25.5	45.61	54	-8.39	74	-28.39	-	-	0-360	101	H
7	*** 8.20894	35.24	Pk	35.8	-27.2	43.84	54	-10.16	74	-30.16	-	-	0-360	200	V
8	*** 9.41566	34.78	Pk	36.2	-25.6	45.38	54	-8.62	74	-28.62	-	-	0-360	101	V
2	6.59931	38.21	Pk	35.6	-28.5	45.31	54	-8.69	74	-28.69	68.2	-22.89	0-360	200	H
6	6.60004	47.47	PK-U	35.6	-28.5	54.57	-	-	-	-	68.2	-13.63	63	220	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

PK-U - Maximum Peak

### HIGH CHANNEL RESULTS

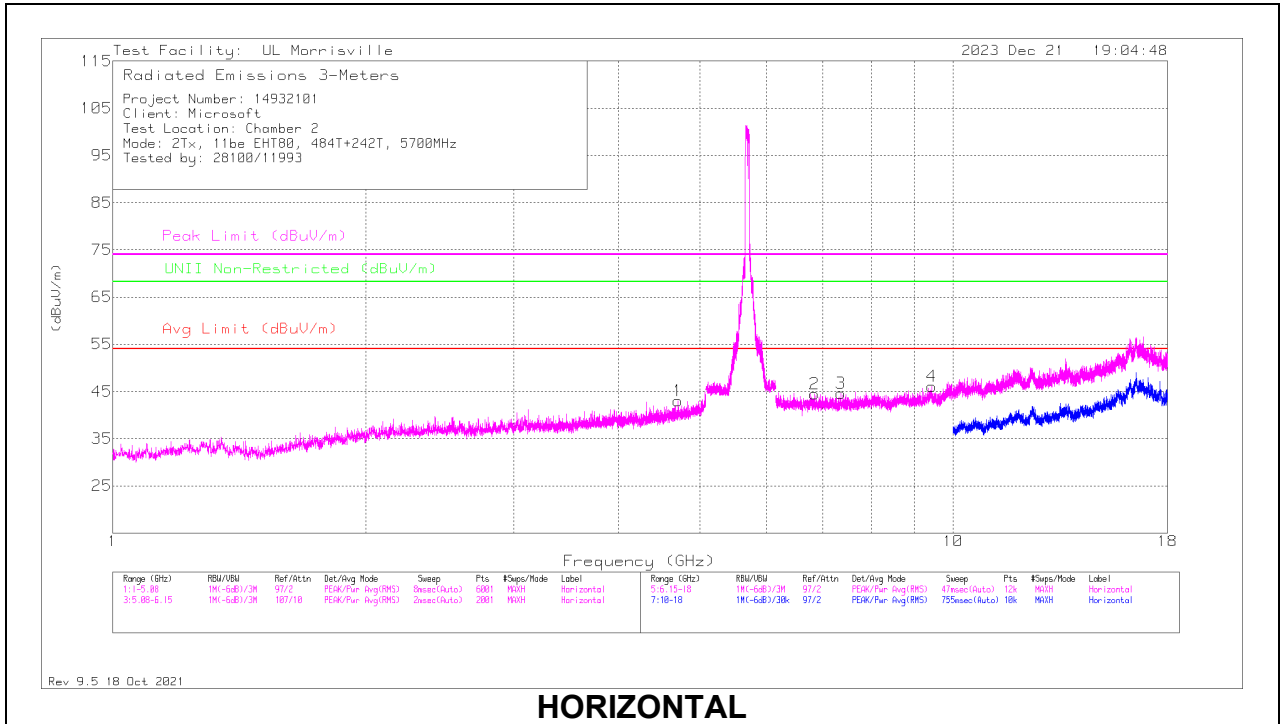

**HORIZONTAL**

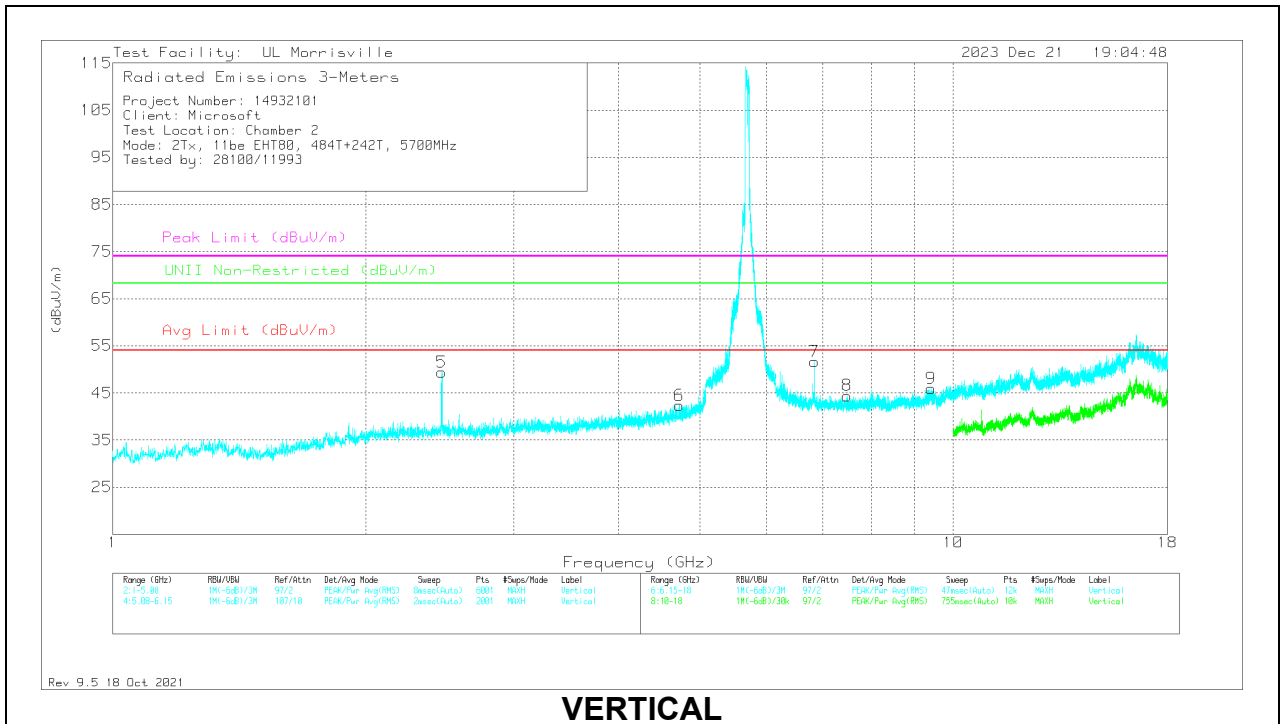

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	86408 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.71008	39.53	Pk	34.1	-30.6	43.03	54	-10.97	74	-30.97	-	-	0-360	199	H
6	*** 4.7264	38.7	Pk	34.2	-30.5	42.4	54	-11.6	74	-31.6	-	-	0-360	199	V
3	*** 7.35574	36.28	Pk	35.6	-27.3	44.58	54	-9.42	74	-29.42	-	-	0-360	199	H
4	*** 9.44134	36.02	Pk	36.3	-26.3	46.02	54	-7.98	74	-27.98	-	-	0-360	199	H
8	*** 7.4851	35.31	Pk	35.7	-26.6	44.41	54	-9.59	74	-29.59	-	-	0-360	199	V
9	*** 9.41468	35.35	Pk	36.2	-25.6	45.95	54	-8.05	74	-28.05	-	-	0-360	101	V
5	2.46619	51.85	PK-U	32.4	-33.8	50.45	-	-	-	-	68.2	-17.75	267	113	V
2	6.83928	36.54	Pk	35.7	-27.8	44.44	54	-9.56	74	-29.56	68.2	-23.76	0-360	101	H
7	6.84003	42.97	PK-U	35.7	-27.8	50.87	-	-	-	-	68.2	-17.33	0	115	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

PK-U - Maximum Peak

**2TX CDD MODE – 242T+484T (NON-CONTIGUOUS)**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

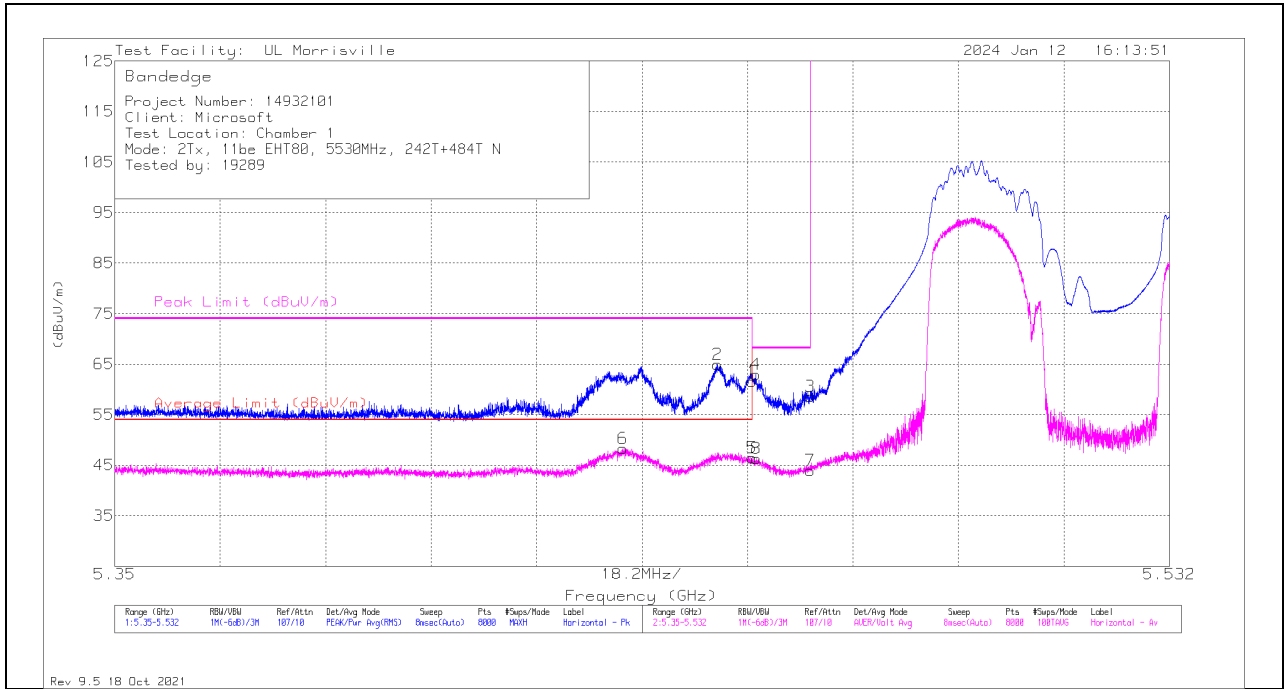


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	40.52	Pk	34.4	-23.3	10	61.62	-	-	74	-12.38	21	372	H
2	* ** 5.454	43.69	Pk	34.4	-23.2	10	64.89	-	-	74	-9.11	21	372	H
5	* ** 5.45999	25.37	ADV	34.4	-23.3	10	46.47	54	-7.53	-	-	21	372	H
6	* ** 5.43767	27.16	ADV	34.4	-23.2	10	48.36	54	-5.64	-	-	21	372	H
4	5.46058	41.84	Pk	34.4	-23.3	10	62.94	-	-	68.2	-5.26	21	372	H
8	5.46076	25.23	ADV	34.4	-23.3	10	46.33	-	-	-	-	21	372	H
3	5.47	37.39	Pk	34.4	-23.2	10	58.59	-	-	68.2	-9.61	21	372	H
7	5.47	22.78	ADV	34.4	-23.2	10	43.98	-	-	-	-	21	372	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



**VERTICAL RESULT**

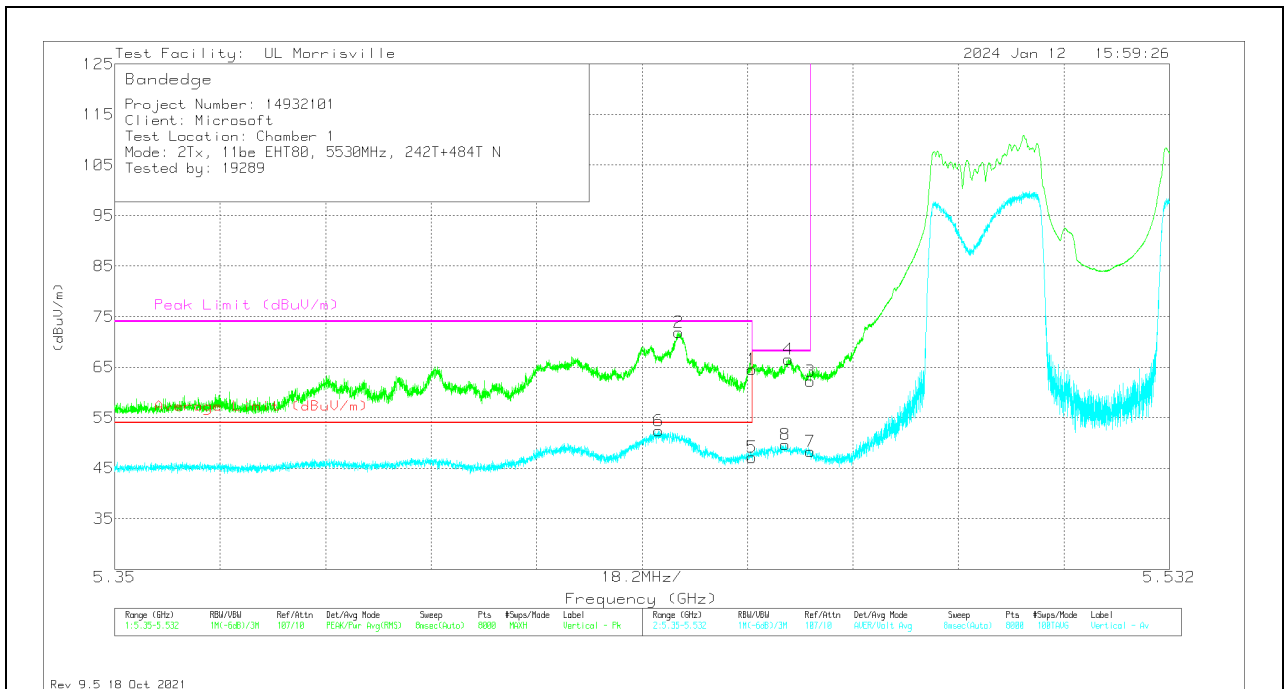


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	43.42	Pk	34.4	-23.3	10	64.52	-	-	74	-9.48	358	253	V
2	* ** 5.44727	50.58	Pk	34.4	-23.1	10	71.88	-	-	74	-2.12	358	253	V
5	* ** 5.45999	26.03	ADV	34.4	-23.3	10	47.13	54	-6.87	-	-	358	253	V
6	* ** 5.44386	31.11	ADV	34.4	-23.1	10	52.41	54	-1.59	-	-	358	253	V
8	5.46574	28.64	ADV	34.4	-23.4	10	49.64	-	-	-	-	358	253	V
4	5.46627	45.54	Pk	34.4	-23.4	10	66.54	-	-	68.2	-1.66	358	253	V
3	5.47	40.99	Pk	34.4	-23.2	10	62.19	-	-	68.2	-6.01	358	253	V
7	5.47	27.05	ADV	34.4	-23.2	10	48.25	-	-	-	-	358	253	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

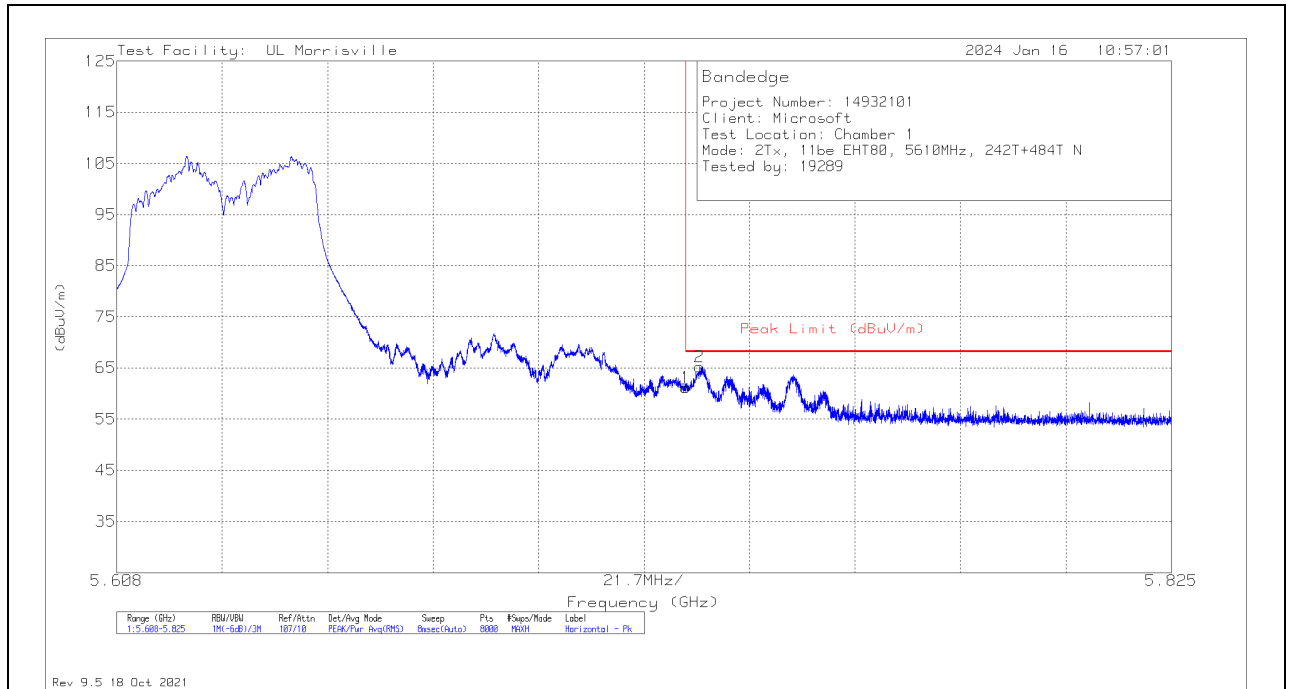

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.62	Pk	34.5	-23	10	61.12	68.2	-7.08	19	380	H
2	5.72796	43.67	Pk	34.5	-22.9	10	65.27	68.2	-2.93	19	380	H

Pk - Peak detector

**VERTICAL RESULT**

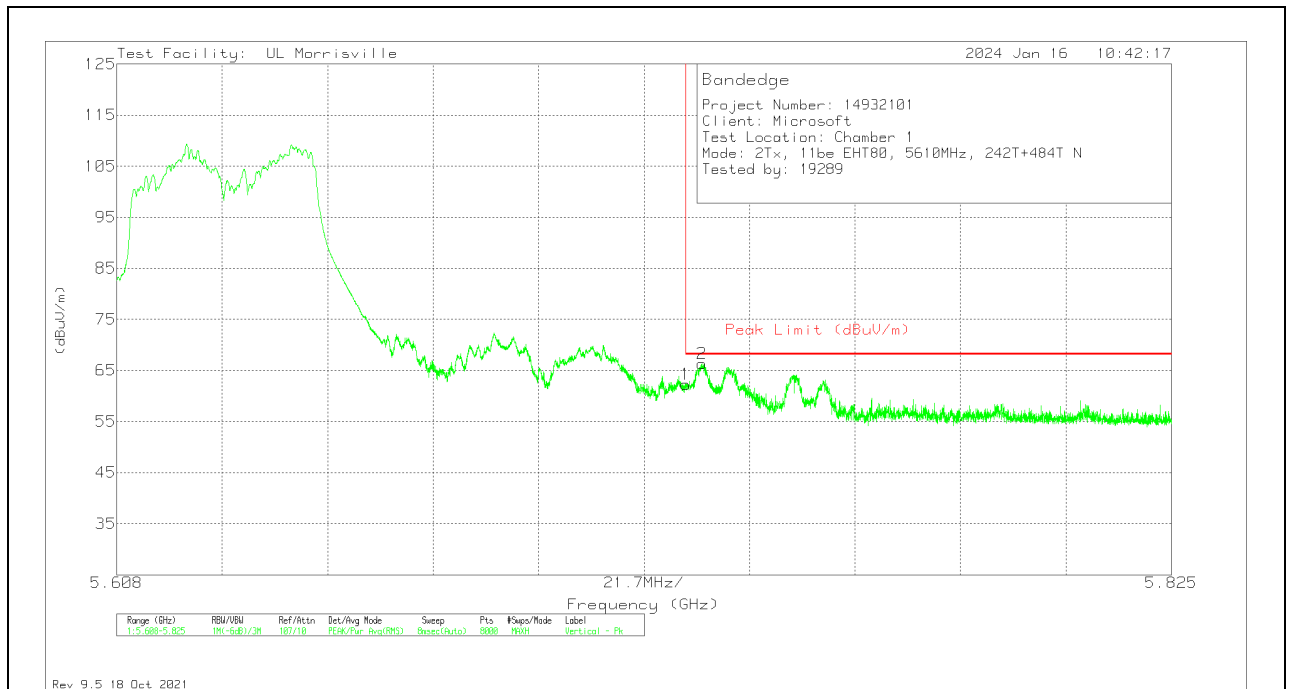


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.77	Pk	34.5	-23	10	62.27	68.2	-5.93	10	310	V
2	5.72839	44.73	Pk	34.5	-22.9	10	66.33	68.2	-1.87	10	310	V

Pk - Peak detector

**2TX CDD MODE – 484T+242T (NON-CONTIGUOUS)**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

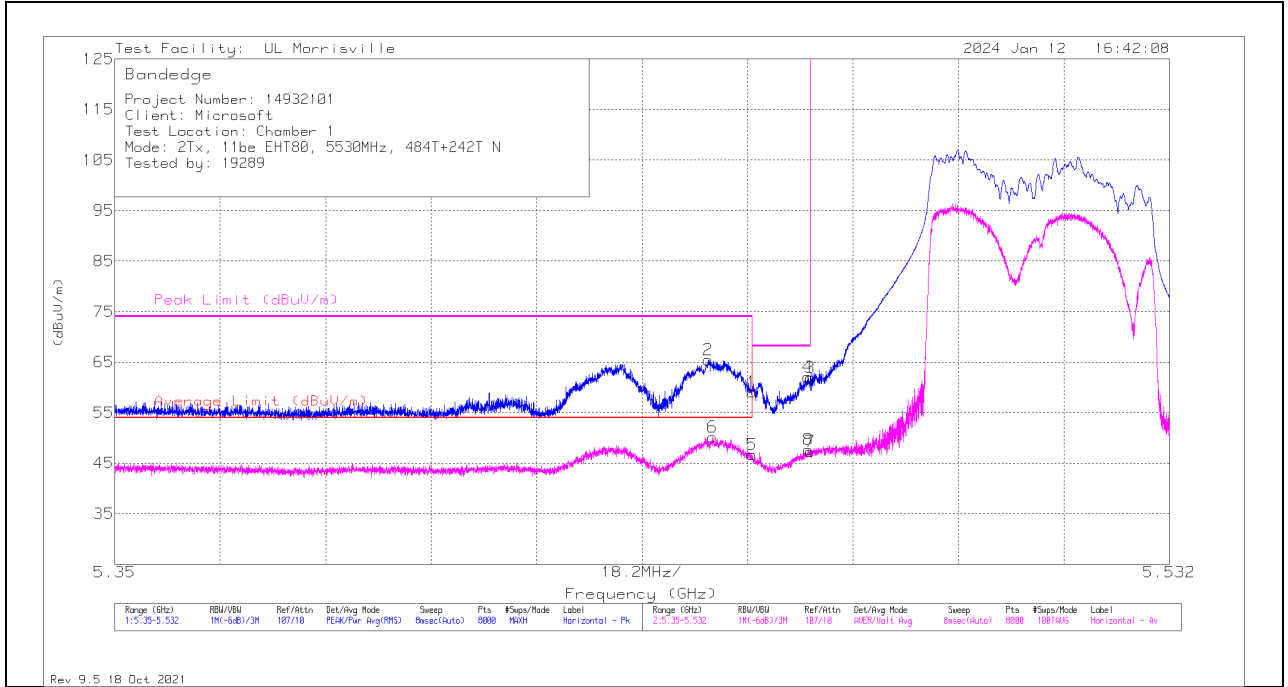

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	37.98	Pk	34.4	-23.3	10	59.08	-	-	74	-14.92	27	372	H
2	* ** 5.45243	44.2	Pk	34.4	-23.2	10	65.4	-	-	74	-8.6	27	372	H
5	* ** 5.45999	25.58	ADV	34.4	-23.3	10	46.68	54	-7.32	-	-	27	372	H
6	* ** 5.45312	29.02	ADV	34.4	-23.2	10	50.22	54	-3.78	-	-	27	372	H
4	5.46959	40.89	Pk	34.4	-23.2	10	62.09	-	-	68.2	-6.11	27	372	H
8	5.46975	26.48	ADV	34.4	-23.2	10	47.68	-	-	-	-	27	372	H
3	5.47	40.81	Pk	34.4	-23.2	10	62.01	-	-	68.2	-6.19	27	372	H
7	5.47	26.14	ADV	34.4	-23.2	10	47.34	-	-	-	-	27	372	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

### VERTICAL RESULT

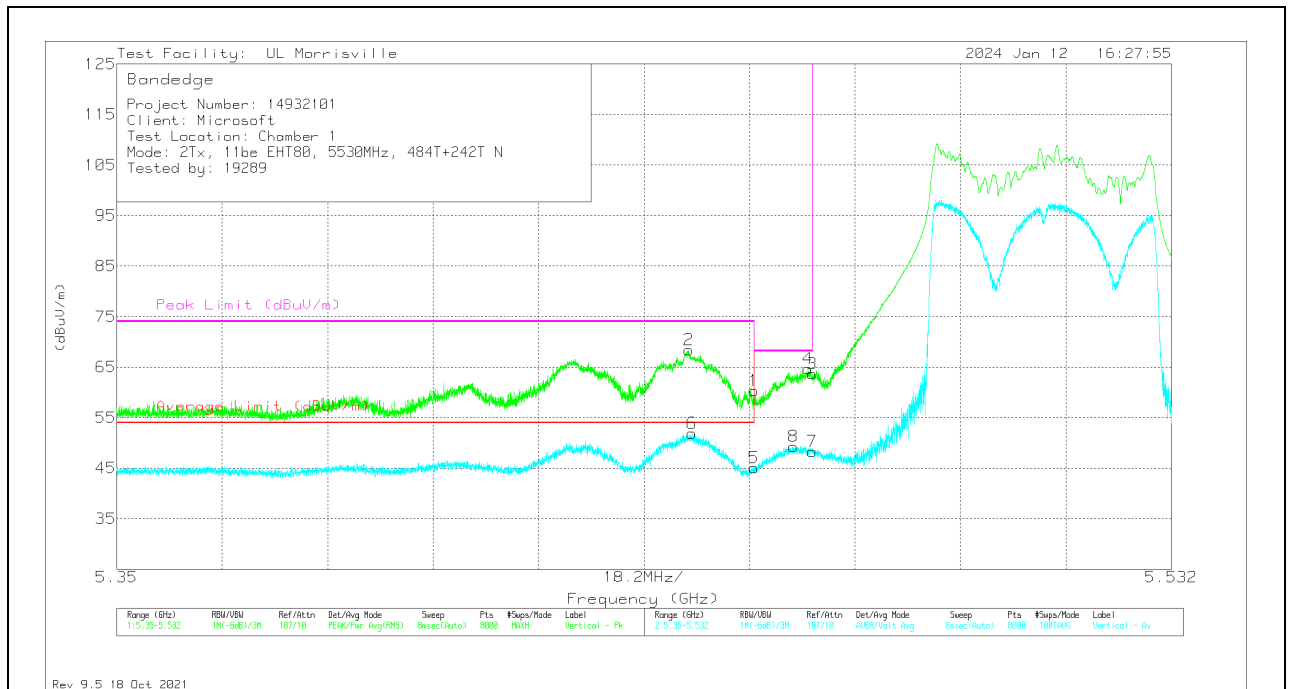


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	39.24	Pk	34.4	-23.3	10	60.34	-	-	74	-13.66	357	300	V
2	* ** 5.44873	47.11	Pk	34.4	-23.1	10	68.41	-	-	74	-5.59	357	300	V
5	* ** 5.45999	23.99	ADV	34.4	-23.3	10	45.09	54	-8.91	-	-	357	299	V
6	* ** 5.44927	30.69	ADV	34.4	-23.2	10	51.89	54	-2.11	-	-	357	299	V
8	5.46681	28.25	ADV	34.4	-23.3	10	49.35	-	-	-	-	357	299	V
4	5.46929	43.53	Pk	34.4	-23.2	10	64.73	-	-	68.2	-3.47	357	300	V
3	5.47	42.51	Pk	34.4	-23.2	10	63.71	-	-	68.2	-4.49	357	300	V
7	5.47	27.16	ADV	34.4	-23.2	10	48.36	-	-	-	-	357	299	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

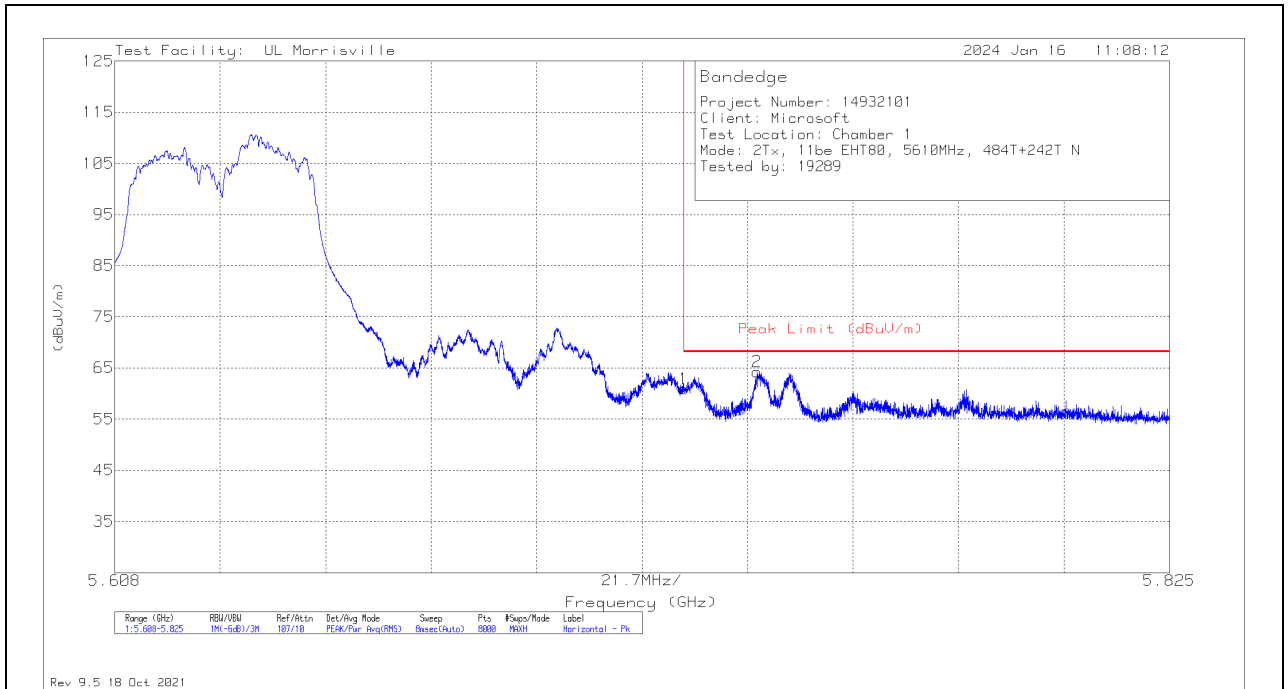

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.42	Pk	34.5	-23	10	60.92	68.2	-7.28	31	386	H
2	5.74019	43.07	Pk	34.5	-23.2	9.9	64.27	68.2	-3.93	31	386	H

Pk - Peak detector

**VERTICAL RESULT**

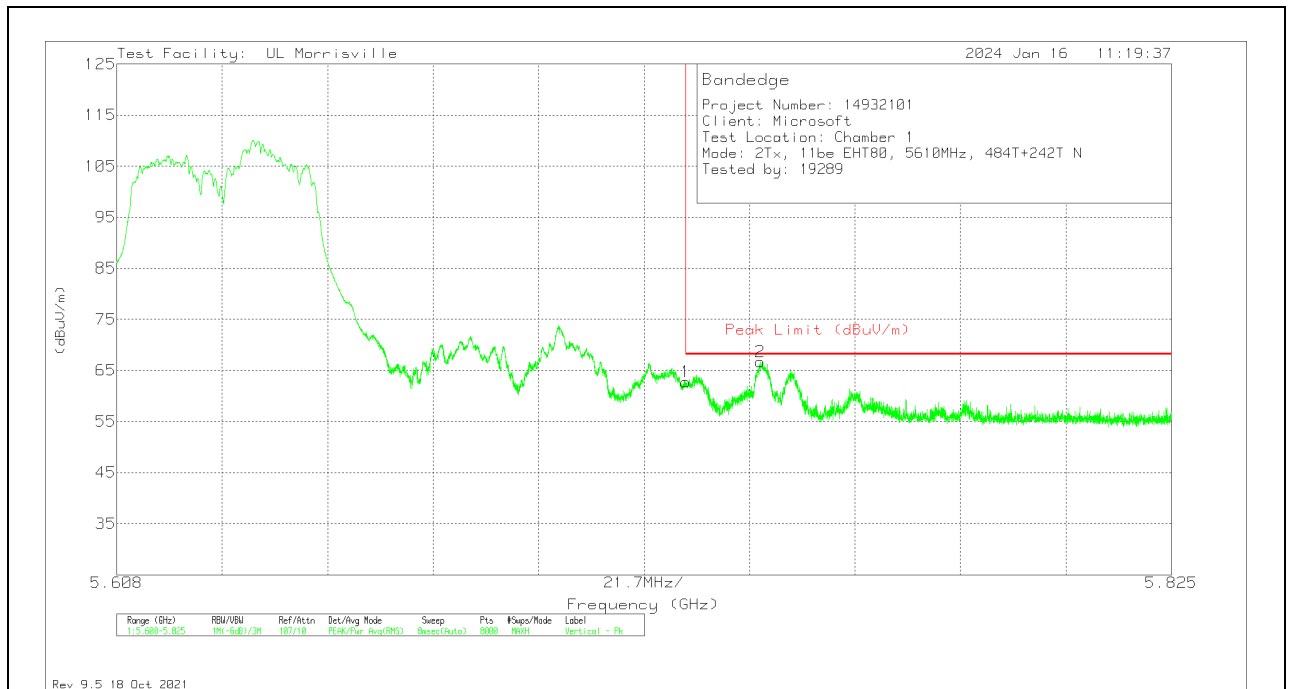


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.22	Pk	34.5	-23	10	62.72	68.2	-5.48	17	251	V
2	5.74044	45.47	Pk	34.5	-23.2	9.9	66.67	68.2	-1.53	17	251	V

Pk - Peak detector

**2TX CDD MODE – 996T**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

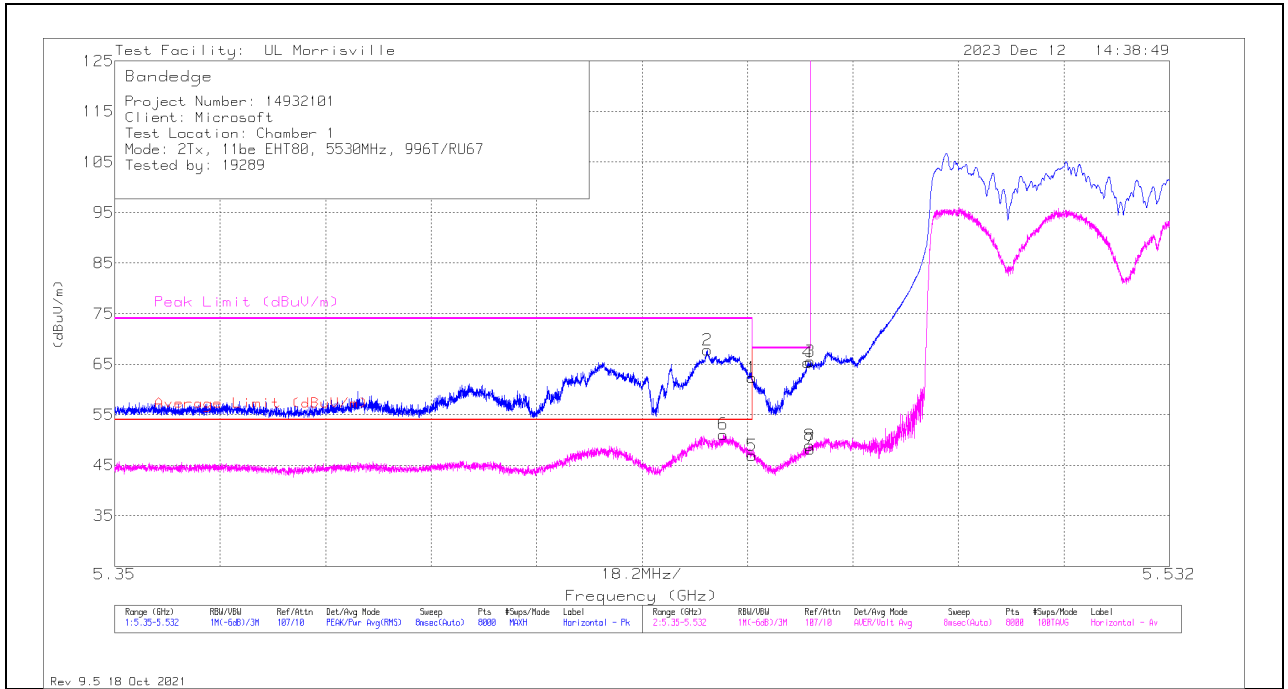


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	41.25	Pk	34.4	-23.3	10	62.35	-	-	74	-11.65	30	361	H
2	* ** 5.45225	46.59	Pk	34.4	-23.2	10	67.79	-	-	74	-6.21	30	361	H
5	* ** 5.45999	25.83	ADV	34.4	-23.3	10	46.93	54	-7.07	-	-	30	361	H
6	* ** 5.45503	29.9	ADV	34.4	-23.2	10	51.1	54	-2.9	-	-	30	361	H
4	5.46961	44.12	Pk	34.4	-23.2	10	65.32	-	-	68.2	-2.88	30	361	H
8	5.46995	27.68	ADV	34.4	-23.2	10	48.88	-	-	-	-	30	361	H
3	5.47	44.4	PK	34.4	-23.2	10	65.6	-	-	68.2	-2.6	30	361	H
7	5.47	26.99	ADV	34.4	-23.2	10	48.19	-	-	-	-	30	361	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



**VERTICAL RESULT**

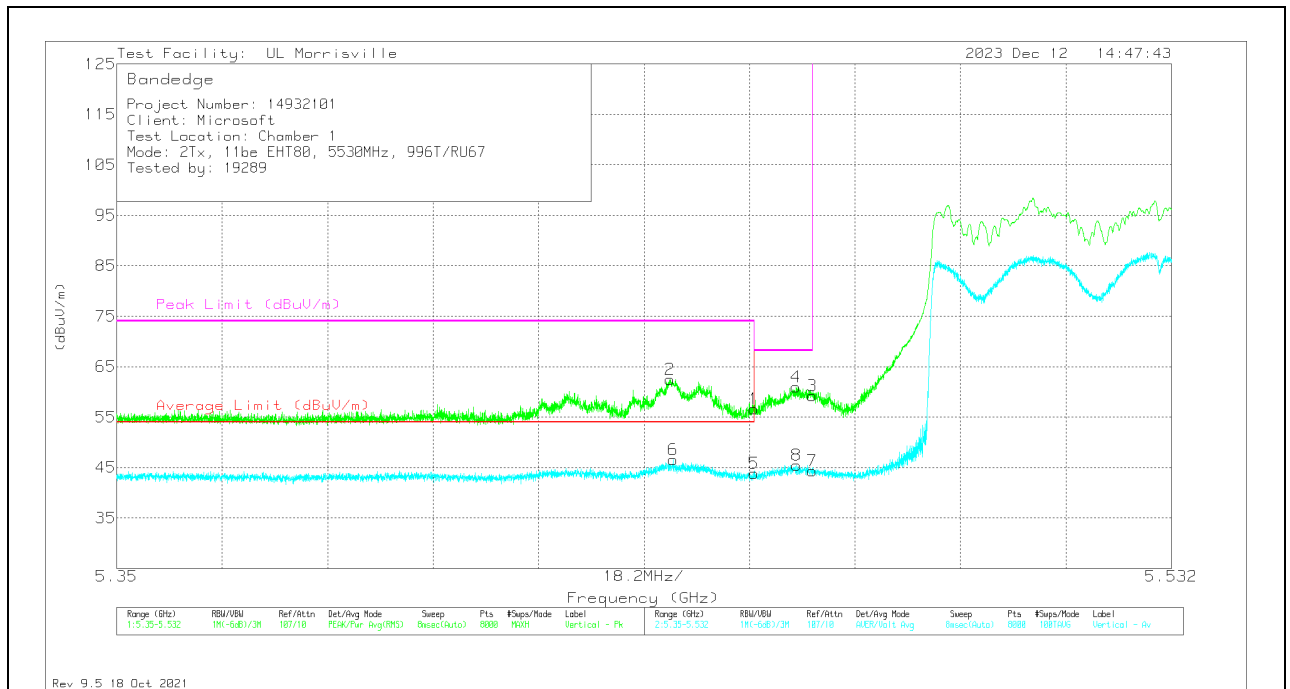


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	35.48	Pk	34.4	-23.3	10	56.58	-	-	74	-17.42	358	266	V
2	*** 5.44547	41.2	Pk	34.4	-23.1	10	62.5	-	-	74	-11.5	358	266	V
5	*** 5.45999	22.79	ADV	34.4	-23.3	10	43.89	54	-10.11	-	-	358	266	V
6	*** 5.44604	25.31	ADV	34.4	-23.1	10	46.61	54	-7.39	-	-	358	266	V
4	5.46727	39.84	Pk	34.4	-23.3	10	60.94	-	-	68.2	-7.26	358	266	V
8	5.46736	24.39	ADV	34.4	-23.3	10	45.49	-	-	-	-	358	266	V
3	5.47	38	Pk	34.4	-23.2	10	59.2	-	-	68.2	-9	358	266	V
7	5.47	23.16	ADV	34.4	-23.2	10	44.36	-	-	-	-	358	266	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

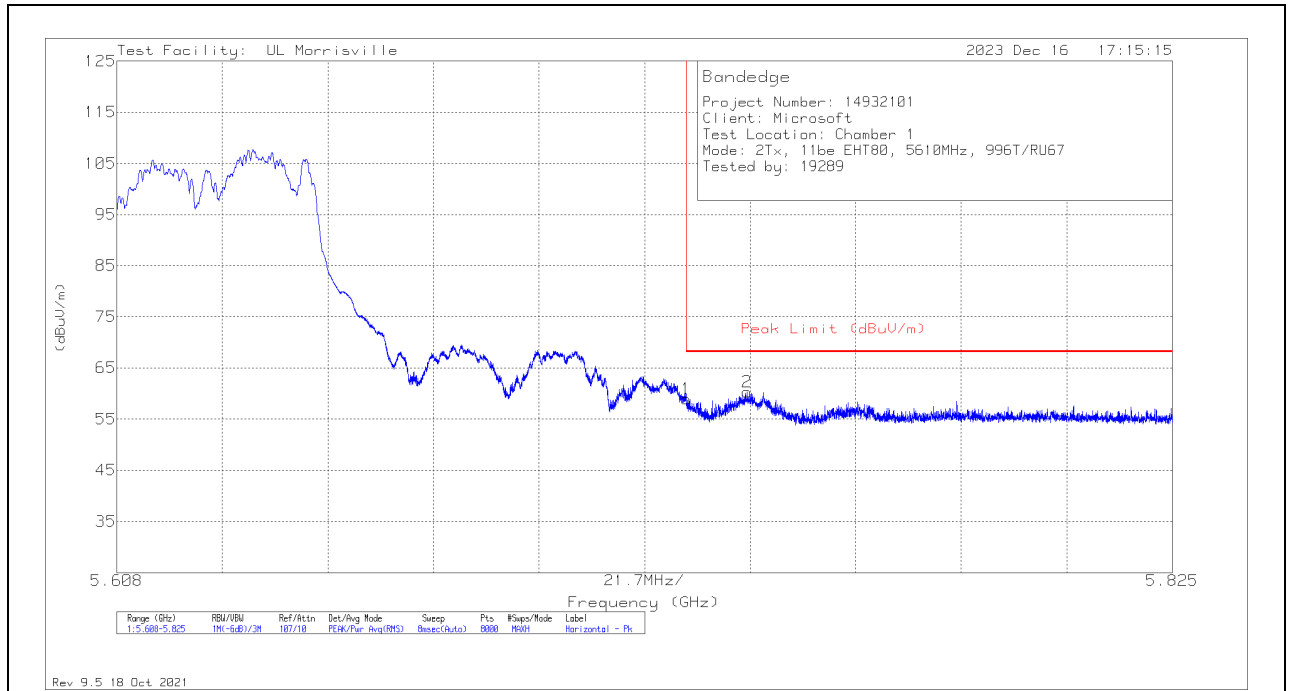

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.47	Pk	34.5	-23	10	58.97	68.2	-9.23	28	357	H
2	5.73756	39.03	Pk	34.5	-23.1	9.9	60.33	68.2	-7.87	28	357	H

Pk - Peak detector

### VERTICAL RESULT

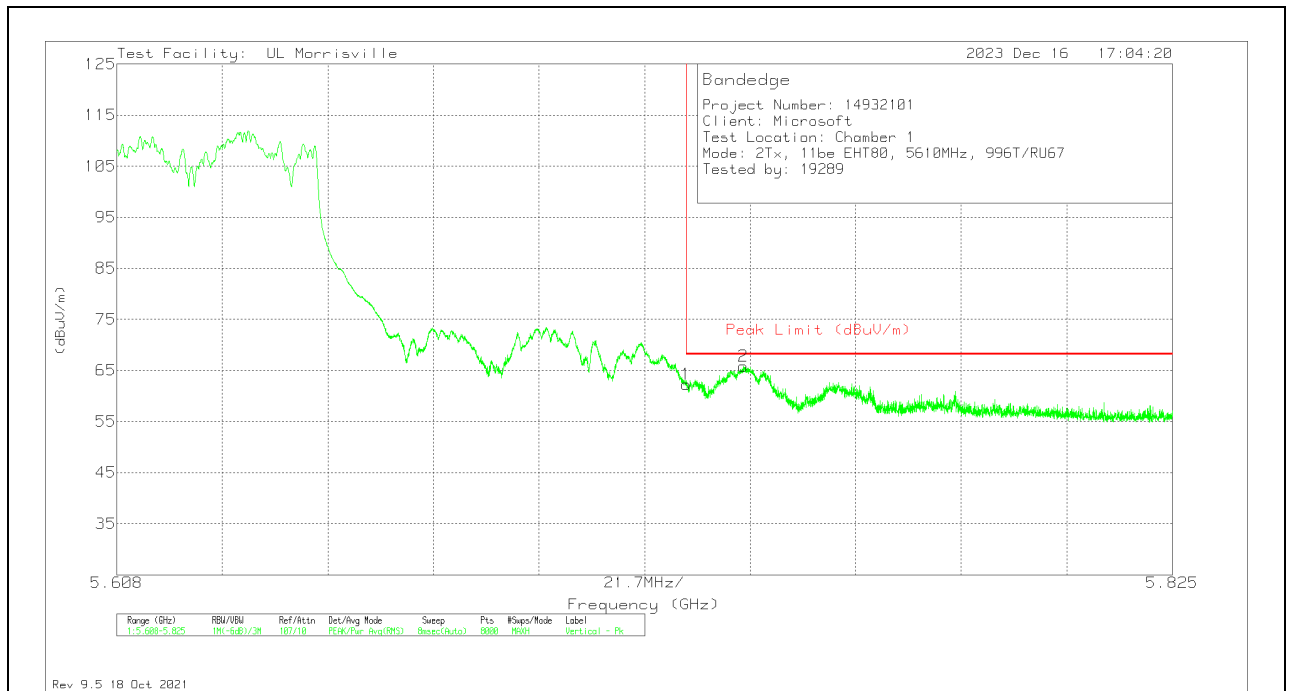

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.81	Pk	34.5	-23	10	62.31	68.2	-5.89	355	201	V
2	5.73678	44.5	Pk	34.5	-23.1	9.9	65.8	68.2	-2.4	355	201	V


Pk - Peak detector

**11.1.25. TX ABOVE 1 GHz 802.11be EHT160 MODE IN THE 5.6 GHz BAND**

**2TX CDD MODE – 996T+484T (CONTIGUOUS)**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

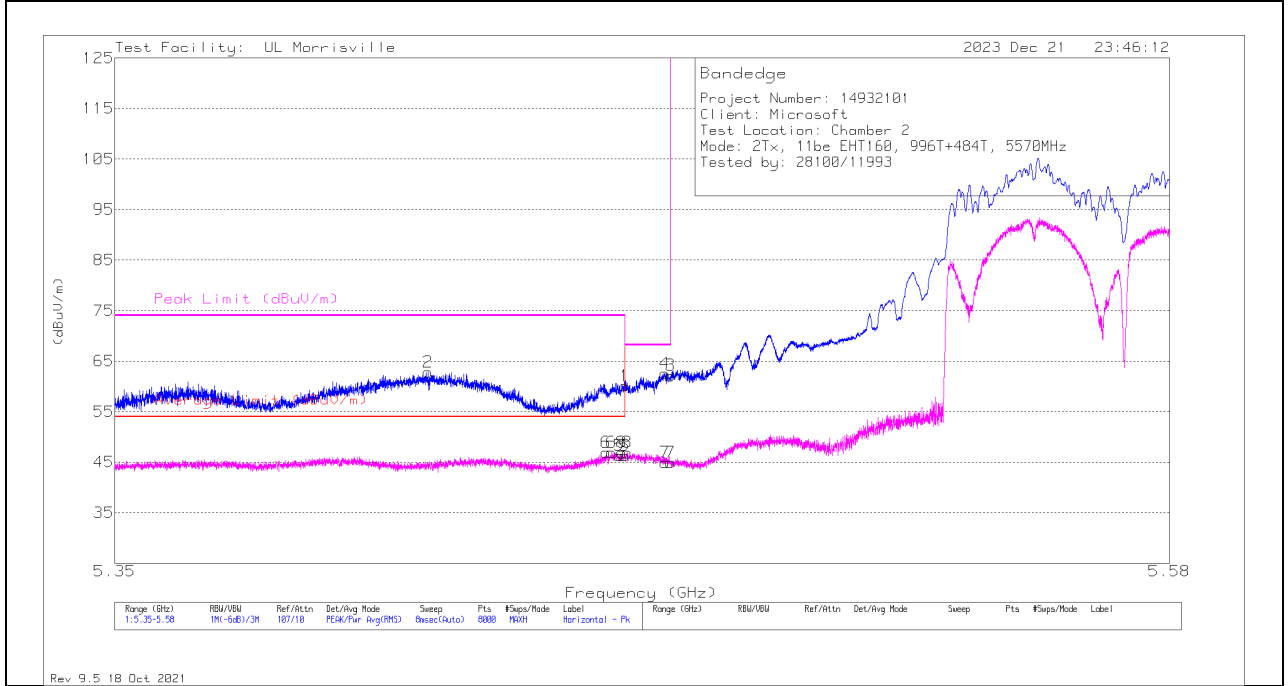

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45998	38.98	Pk	34.4	-23.3	10	0	60.08	-	-	74	-13.92	33	398	H
2	*** 5.41734	41.48	Pk	34.5	-23.1	10	0	62.88	-	-	74	-11.12	33	398	H
5	*** 5.45998	25.19	ADV	34.4	-23.3	10	0.18	46.47	54	-7.53	-	-	33	398	H
6	*** 5.45719	25.85	ADV	34.4	-23.3	10	0.18	47.13	54	-6.87	-	-	33	398	H
8	5.46056	25.78	ADV	34.4	-23.3	10	0.18	47.06	-	-	-	-	33	398	H
4	5.46873	41.51	Pk	34.4	-23.3	10	0	62.61	-	-	68.2	-5.59	33	398	H
3	5.46999	40.95	Pk	34.4	-23.2	10	0	62.15	-	-	68.2	-6.05	33	398	H
7	5.46999	23.75	ADV	34.4	-23.2	10	0.18	45.13	-	-	-	-	33	398	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**VERTICAL RESULT**

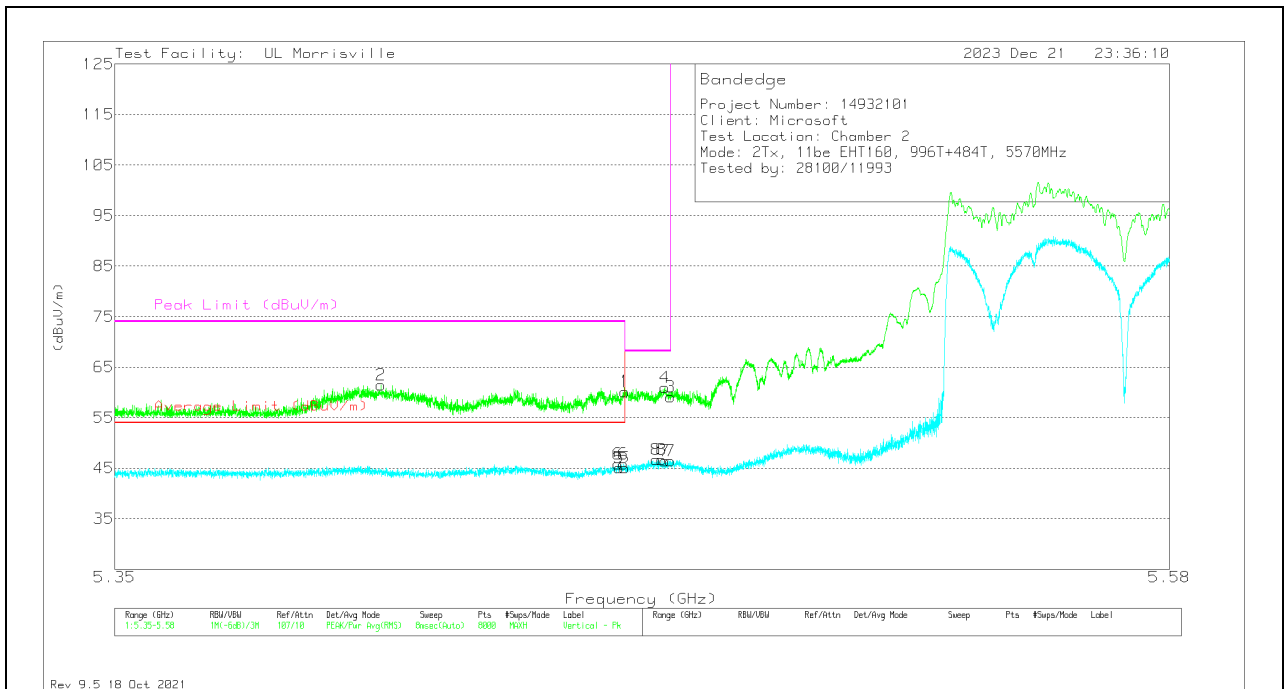


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	39.06	Pk	34.4	-23.3	10	0	60.16	-	-	74	-13.84	27	396	V
2	* ** 5.40716	40.11	Pk	34.5	-23.1	10	0	61.51	-	-	74	-12.49	27	396	V
5	* ** 5.45998	23.94	ADV	34.4	-23.3	10	0.18	45.22	54	-8.78	-	-	27	396	V
6	* ** 5.45973	24.77	ADV	34.4	-23.3	10	0.18	46.05	54	-7.95	-	-	27	396	V
8	5.46806	25.6	ADV	34.4	-23.3	10	0.18	46.88	-	-	-	-	27	396	V
4	5.46875	39.85	Pk	34.4	-23.3	10	0	60.95	-	-	68.2	-7.25	27	396	V
3	5.46999	37.89	Pk	34.4	-23.2	10	0	59.09	-	-	68.2	-9.11	27	396	V
7	5.46999	25.21	ADV	34.4	-23.2	10	0.18	46.59	-	-	-	-	27	396	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

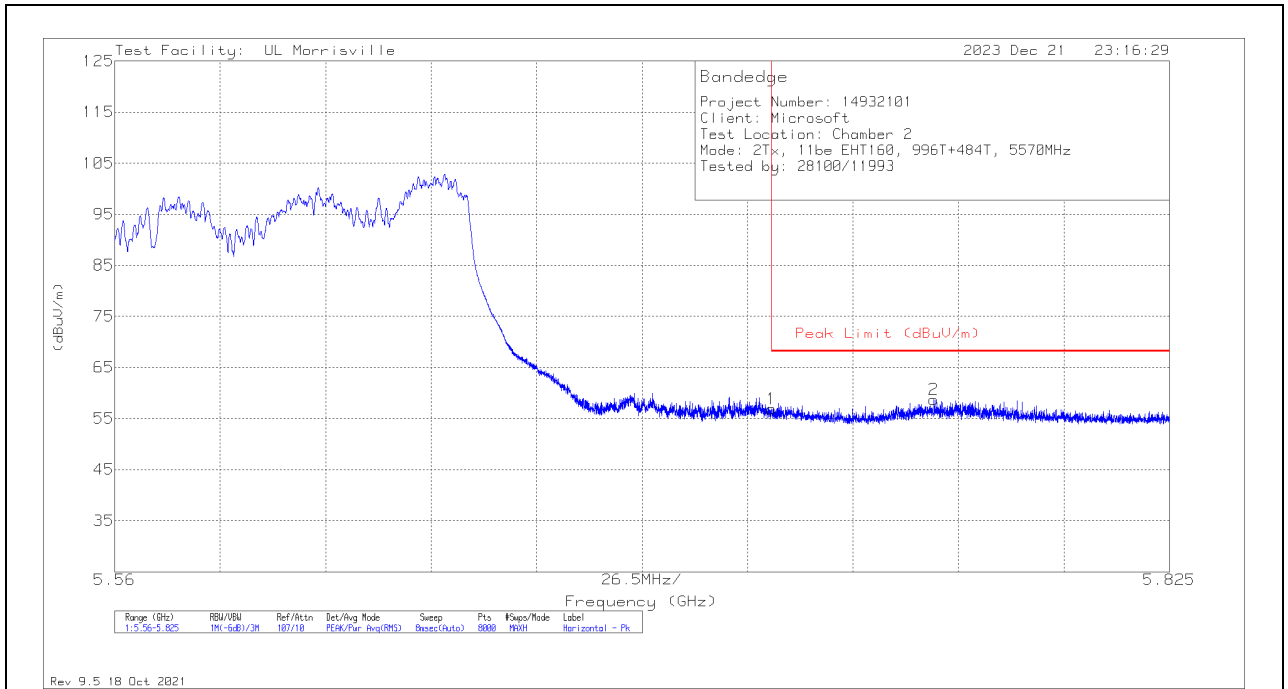

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	35.34	Pk	34.5	-23	10	56.84	68.2	-11.36	81	388	H
2	5.7658	37.37	Pk	34.6	-23.2	10	58.77	68.2	-9.43	81	388	H

Pk - Peak detector

**VERTICAL RESULT**

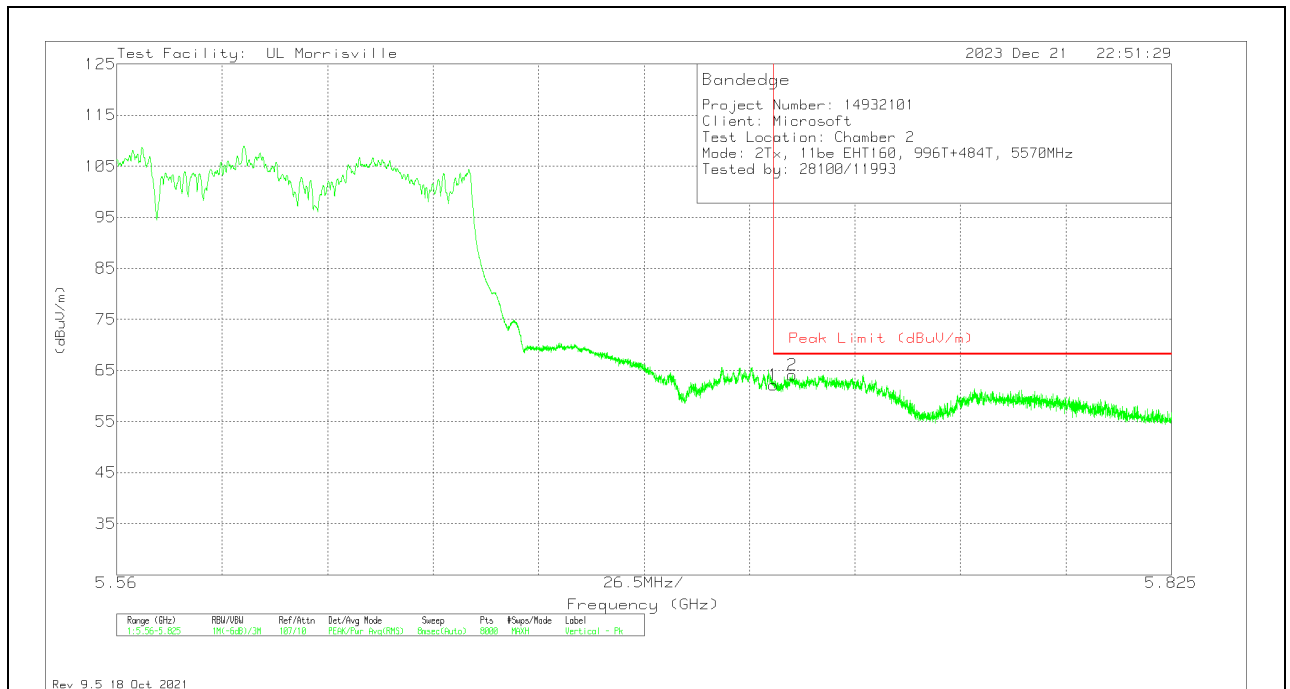


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	10dB Pad	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	40.62	Pk	34.5	-23	10	62.12	68.2	-6.08	4	212	V
2	5.72965	42.62	Pk	34.5	-22.9	9.9	64.12	68.2	-4.08	4	212	V

Pk - Peak detector

**2TX CDD MODE – 484T+996T (NON-CONTIGUOUS)**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

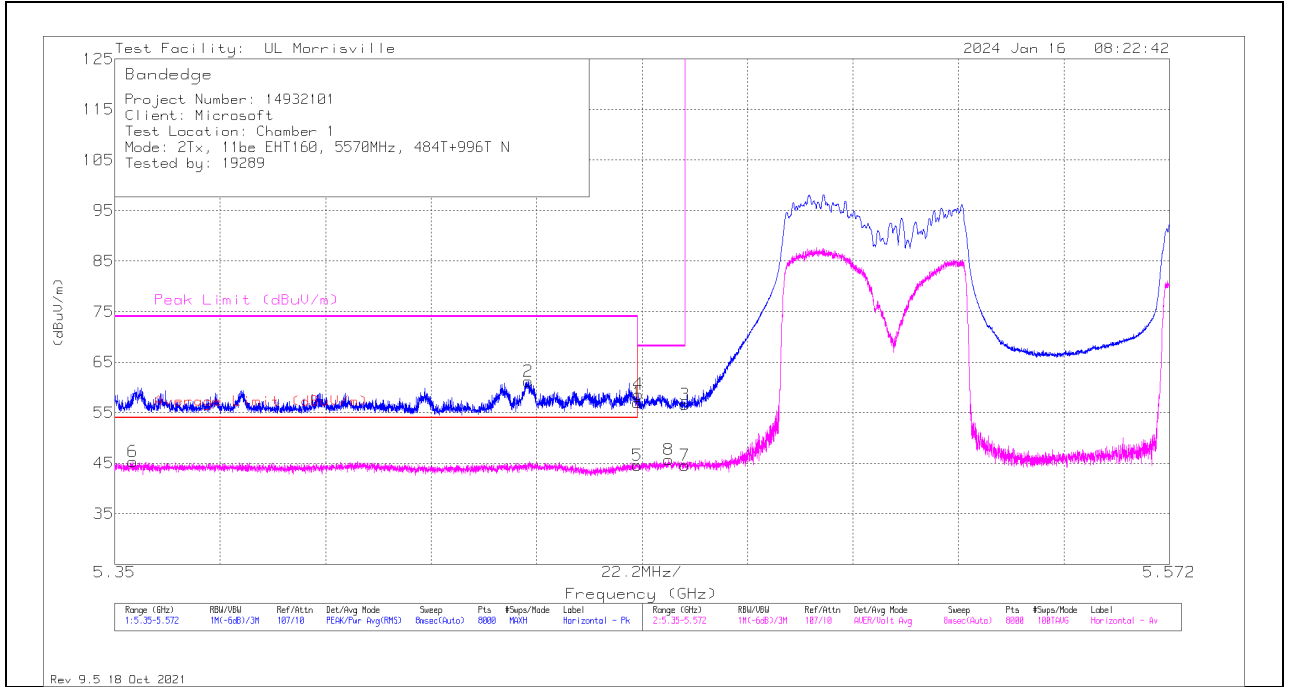


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	35.9	Pk	34.4	-23.3	10	0	57	-	-	74	-17	11	298	H
2	* ** 5.43703	40.06	Pk	34.4	-23.2	10	0	61.26	-	-	74	-12.74	11	298	H
5	* ** 5.45999	23.48	ADV	34.4	-23.3	10	0.18	44.76	54	-9.24	-	-	11	298	H
6	* ** 5.35375	23.53	ADV	34.5	-22.7	10	0.18	45.51	54	-8.49	-	-	11	298	H
4	5.46023	37.57	Pk	34.4	-23.3	10	0	58.67	-	-	68.2	-9.53	11	298	H
8	5.46665	24.64	ADV	34.4	-23.3	10	0.18	45.92	-	-	-	-	11	298	H
3	5.46998	35.48	Pk	34.4	-23.2	10	0	56.68	-	-	68.2	-11.52	11	298	H
7	5.46998	23.43	ADV	34.4	-23.2	10	0.18	44.81	-	-	-	-	11	298	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



**VERTICAL RESULT**

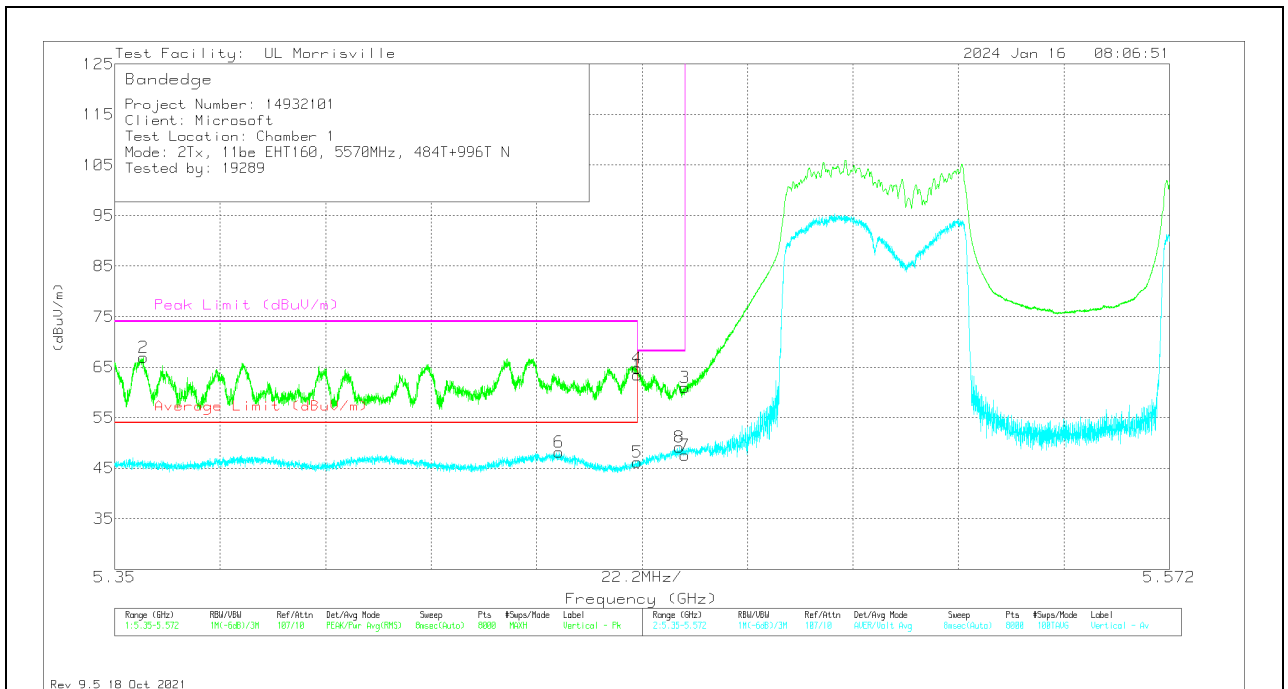


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	42.36	Pk	34.4	-23.3	10	0	63.46	-	-	74	-10.54	346	278	V
2	*** 5.35599	45.15	Pk	34.5	-22.7	10	0	66.95	-	-	74	-7.05	346	278	V
5	*** 5.45999	25.08	ADV	34.4	-23.3	10	0.18	46.36	54	-7.64	-	-	346	278	V
6	*** 5.4435	26.91	ADV	34.4	-23.1	10	0.18	48.39	54	-5.61	-	-	346	278	V
4	5.46004	43.7	Pk	34.4	-23.3	10	0	64.8	-	-	68.2	-3.4	346	278	V
8	5.46884	28.06	ADV	34.4	-23.3	10	0.18	49.34	-	-	-	-	346	278	V
3	5.46998	39.79	Pk	34.4	-23.2	10	0	60.99	-	-	68.2	-7.21	346	278	V
7	5.46998	26.36	ADV	34.4	-23.2	10	0.18	47.74	-	-	-	-	346	278	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

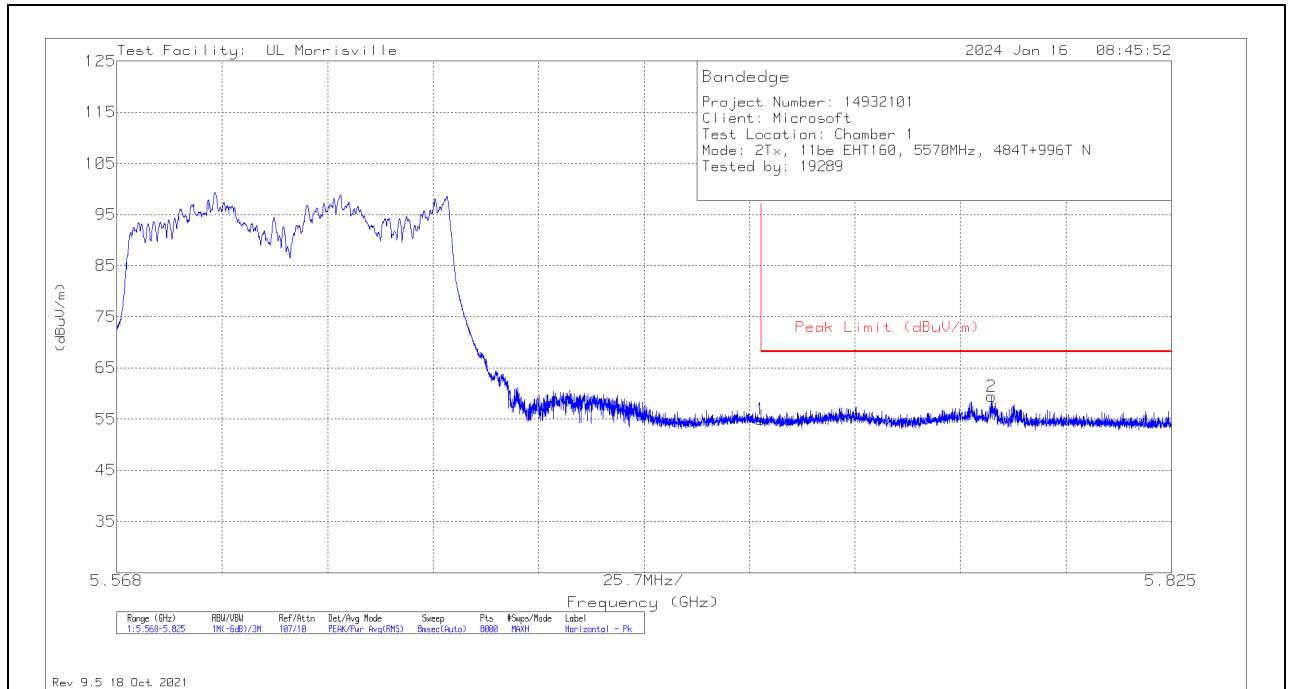

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.47	Pk	34.5	-23	10	54.97	68.2	-13.23	12	311	H
2	5.78118	37.71	Pk	34.7	-23	10	59.41	68.2	-8.79	12	311	H

Pk - Peak detector

### VERTICAL RESULT

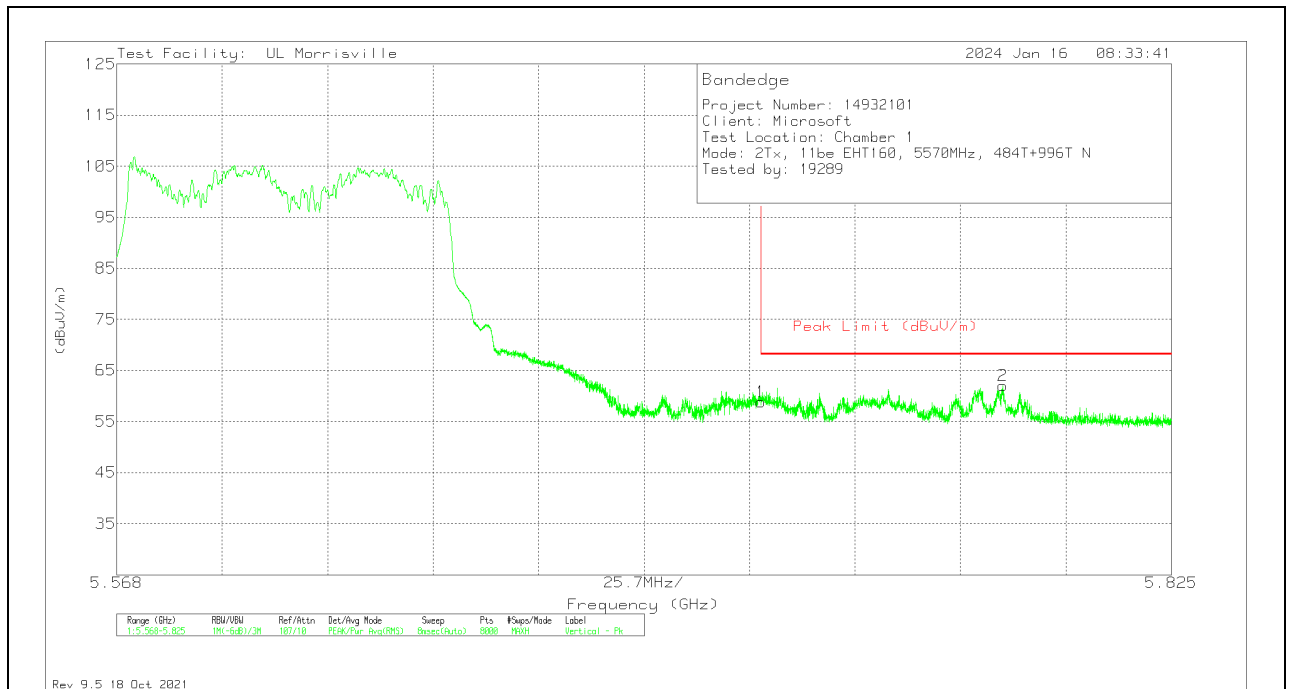


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	37.37	Pk	34.5	-23	10	58.87	68.2	-9.33	341	209	V
2	5.78387	40.36	Pk	34.7	-23	10	62.06	68.2	-6.14	341	209	V

Pk - Peak detector

**2TX CDD MODE – 996T+484T (NON-CONTIGUOUS)**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

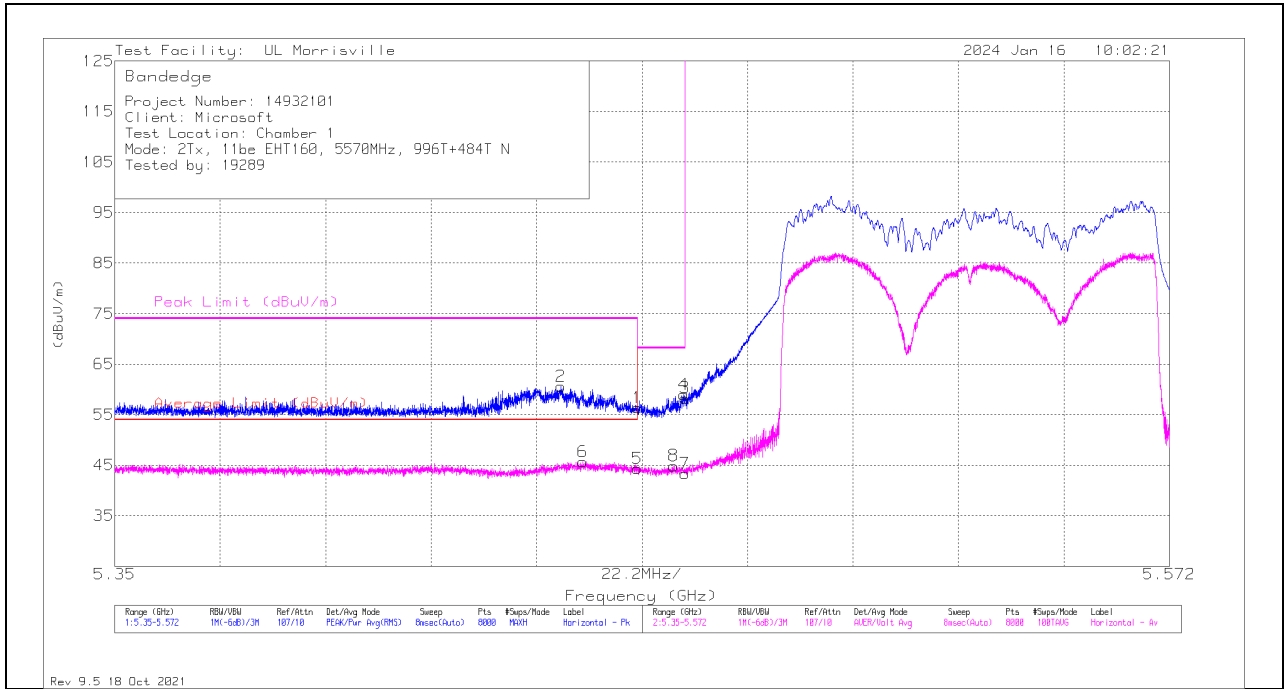

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	35.28	Pk	34.4	-23.3	10	0	56.38	-	-	74	-17.62	9	331	H
2	* ** 5.44394	39.25	Pk	34.4	-23.1	10	0	60.55	-	-	74	-13.45	9	331	H
5	* ** 5.45999	23.27	ADV	34.4	-23.3	10	0.18	44.55	54	-9.45	-	-	9	331	H
6	* ** 5.44858	24.38	ADV	34.4	-23.1	10	0.18	45.86	54	-8.14	-	-	9	331	H
8	5.4677	23.79	ADV	34.4	-23.3	10	0.18	45.07	-	-	-	-	9	331	H
4	5.46978	37.74	Pk	34.4	-23.2	10	0	58.94	-	-	68.2	-9.26	9	331	H
3	5.46998	37.1	Pk	34.4	-23.2	10	0	58.3	-	-	68.2	-9.9	9	331	H
7	5.46998	22.16	ADV	34.4	-23.2	10	0.18	43.54	-	-	-	-	9	331	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**VERTICAL RESULT**

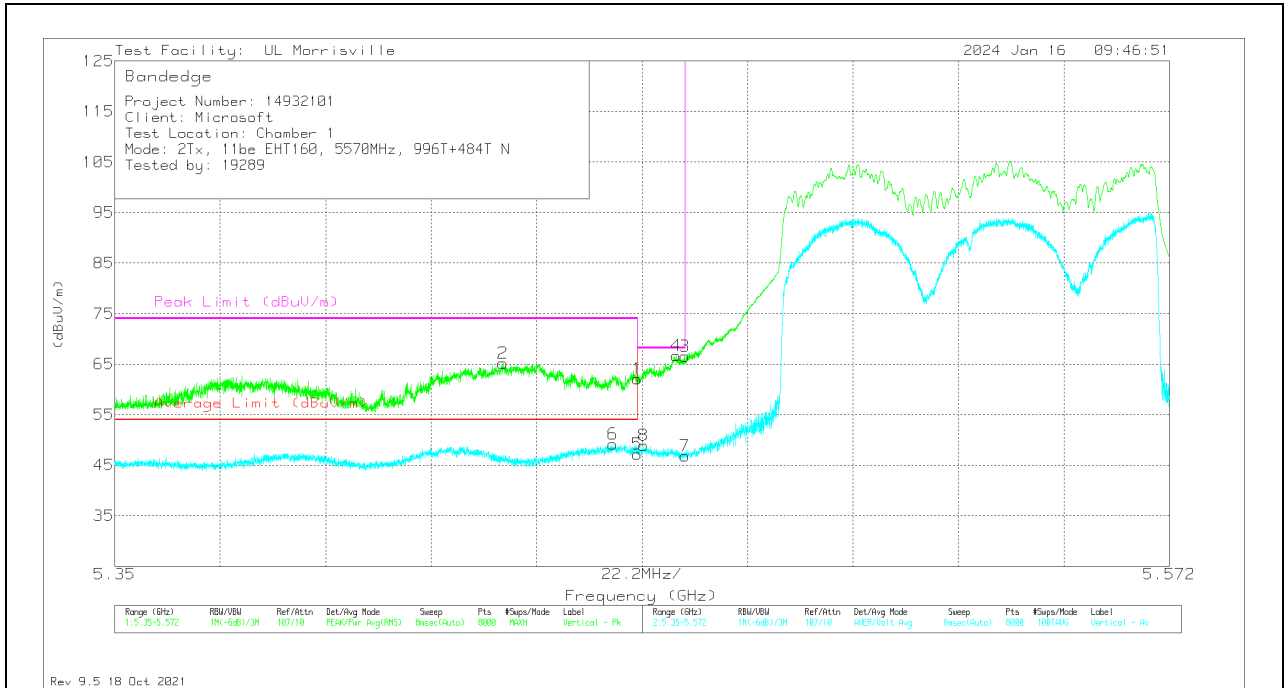


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.45999	41.02	Pk	34.4	-23.3	10	0	62.12	-	-	74	-11.88	343	281	V
2	*** 5.4317	44.09	Pk	34.4	-23.2	9.9	0	65.19	-	-	74	-8.81	343	281	V
5	*** 5.45999	26.05	ADV	34.4	-23.3	10	0.18	47.33	54	-6.67	-	-	343	281	V
6	*** 5.45485	27.93	ADV	34.4	-23.2	10	0.18	49.31	54	-4.69	-	-	343	281	V
8	5.46137	27.81	ADV	34.4	-23.3	10	0.18	49.09	-	-	-	-	343	281	V
4	5.46823	45.54	Pk	34.4	-23.3	10	0	66.64	-	-	68.2	-1.56	343	281	V
3	5.46998	45.33	Pk	34.4	-23.2	10	0	66.53	-	-	68.2	-1.67	343	281	V
7	5.46998	25.63	ADV	34.4	-23.2	10	0.18	47.01	-	-	-	-	343	281	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

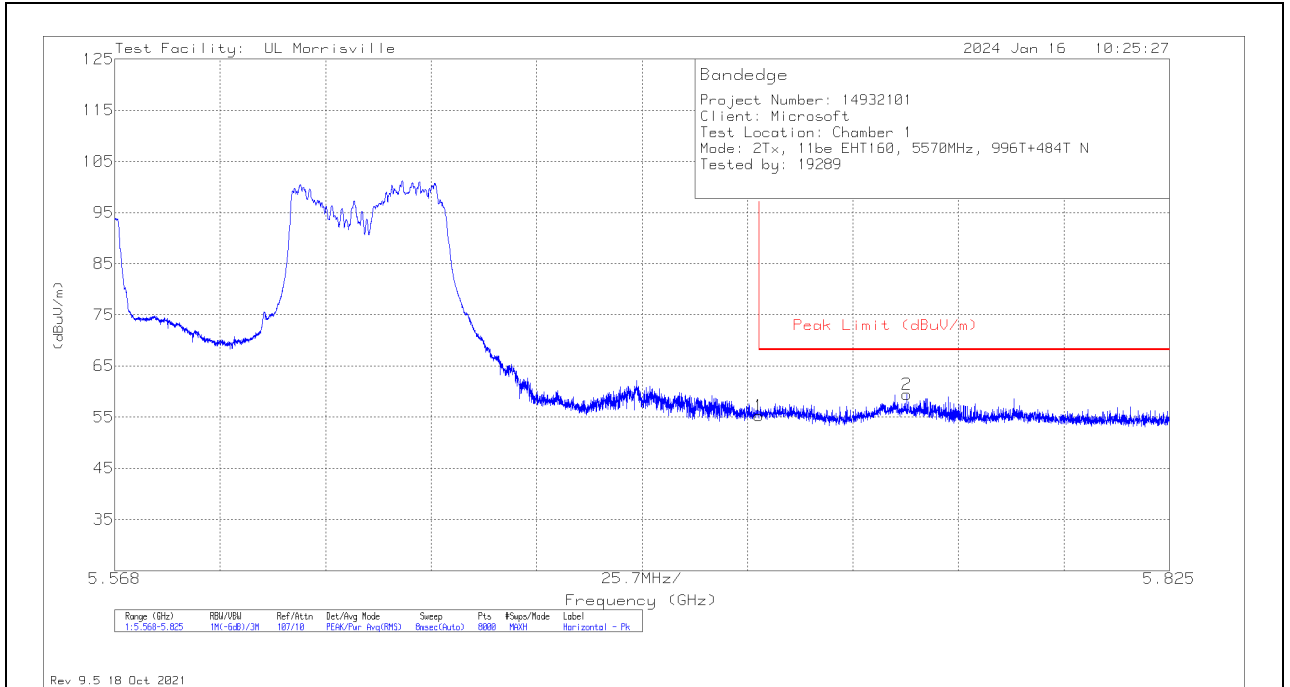

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	33.74	Pk	34.5	-23	10	55.24	68.2	-12.96	26	347	H
2	5.76103	38.06	Pk	34.6	-23.2	10	59.46	68.2	-8.74	26	347	H

Pk - Peak detector

**VERTICAL RESULT**

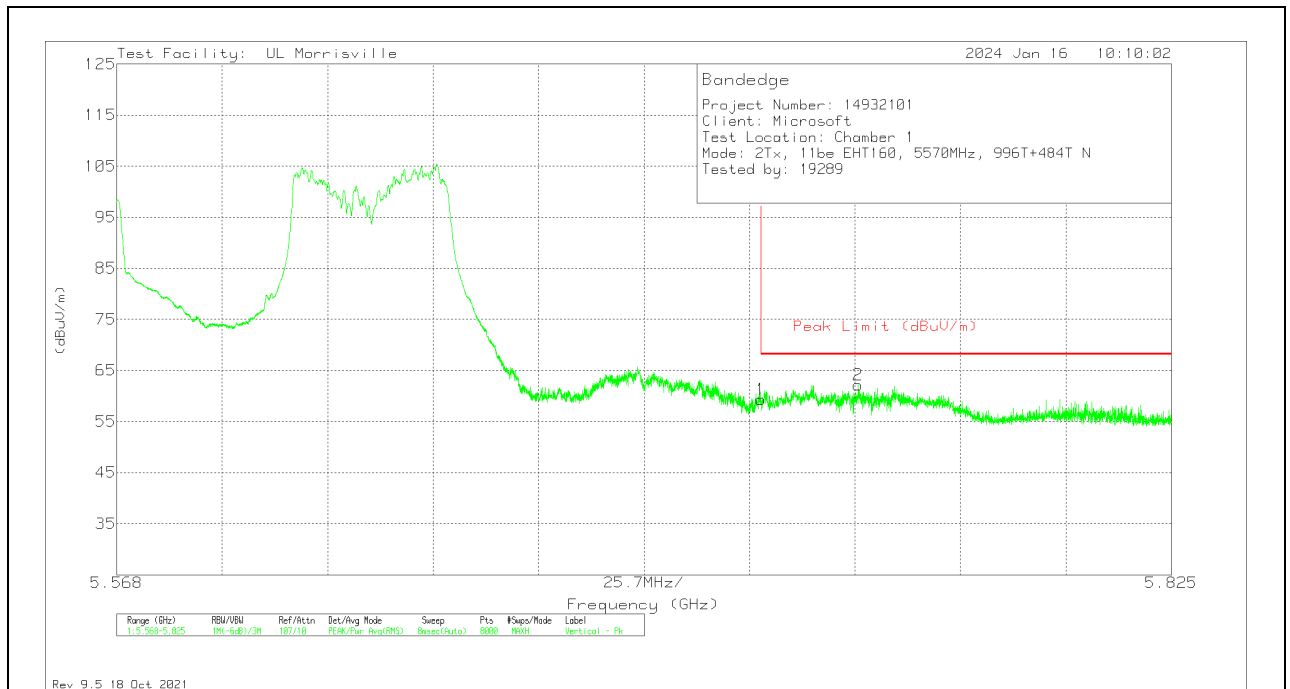


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	37.78	Pk	34.5	-23	10	59.28	68.2	-8.92	335	220	V
2	5.74863	40.74	Pk	34.6	-23.2	10	62.14	68.2	-6.06	335	220	V

Pk - Peak detector

**2TX CDD MODE – 2x996T**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

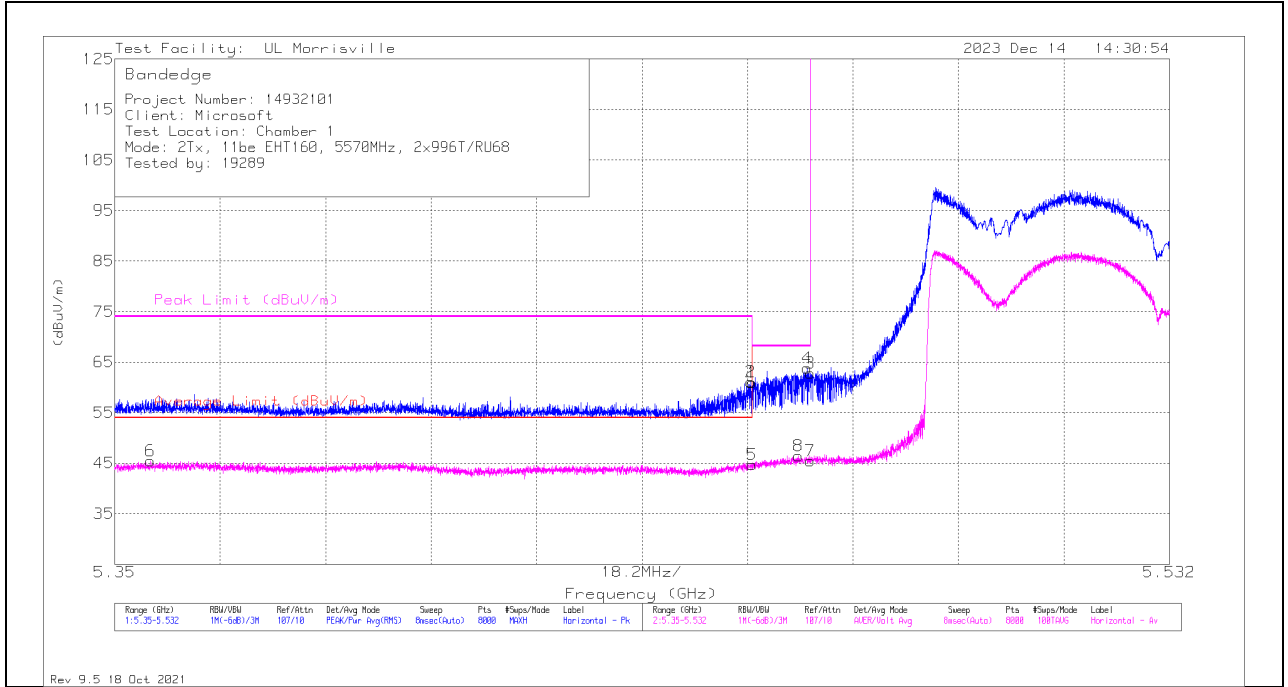


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	39.87	Pk	34.4	-23.3	10	60.97	-	-	74	-13.03	38	388	H
2	* ** 5.45978	39.95	Pk	34.4	-23.3	10	61.05	-	-	74	-12.95	38	388	H
5	* ** 5.45999	23.58	ADV	34.4	-23.3	10	44.68	54	-9.32	-	-	38	388	H
6	* ** 5.35614	23.67	ADV	34.5	-22.7	10	45.47	54	-8.53	-	-	38	388	H
8	5.46802	25.33	ADV	34.4	-23.3	10	46.43	-	-	-	-	38	388	H
4	5.46952	42.68	Pk	34.4	-23.2	10	63.88	-	-	68.2	-4.32	38	388	H
3	5.47	41.65	Pk	34.4	-23.2	10	62.85	-	-	68.2	-5.35	38	388	H
7	5.47	24.29	ADV	34.4	-23.2	10	45.49	-	-	-	-	38	388	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average



### VERTICAL RESULT

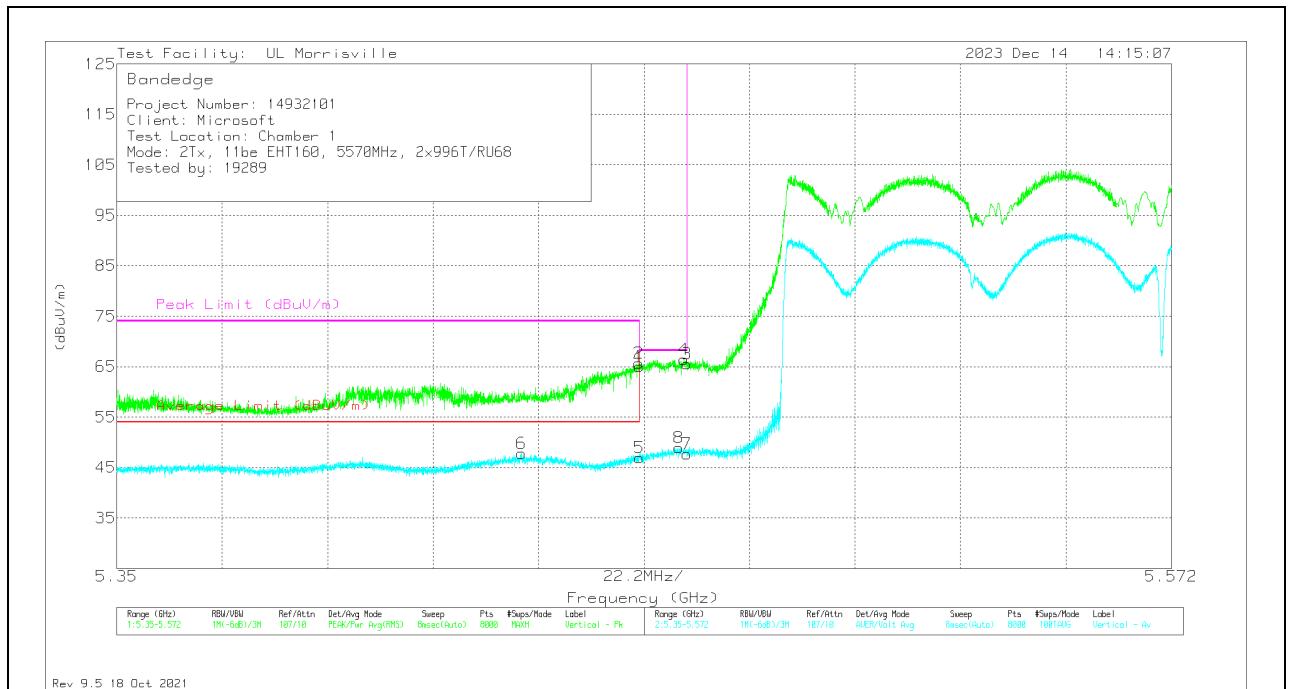


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45999	43.97	Pk	34.4	-23.3	10	65.07	-	-	74	-8.93	353	285	V
2	* ** 5.45985	44.63	Pk	34.4	-23.3	10	65.73	-	-	74	-8.27	353	285	V
5	* ** 5.45999	25.89	ADV	34.4	-23.3	10	46.99	54	-7.01	-	-	353	285	V
6	* ** 5.43517	26.61	ADV	34.4	-23.2	10	47.81	54	-6.19	-	-	353	285	V
8	5.46837	27.88	ADV	34.4	-23.3	10	48.98	-	-	-	-	353	285	V
4	5.46934	45.23	Pk	34.4	-23.2	10	66.43	-	-	68.2	-1.77	353	285	V
3	5.46998	44.35	Pk	34.4	-23.2	10	65.55	-	-	68.2	-2.65	353	285	V
7	5.46998	26.54	ADV	34.4	-23.2	10	47.74	-	-	-	-	353	285	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 ADV - Linear Voltage Average

**BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL RESULT**

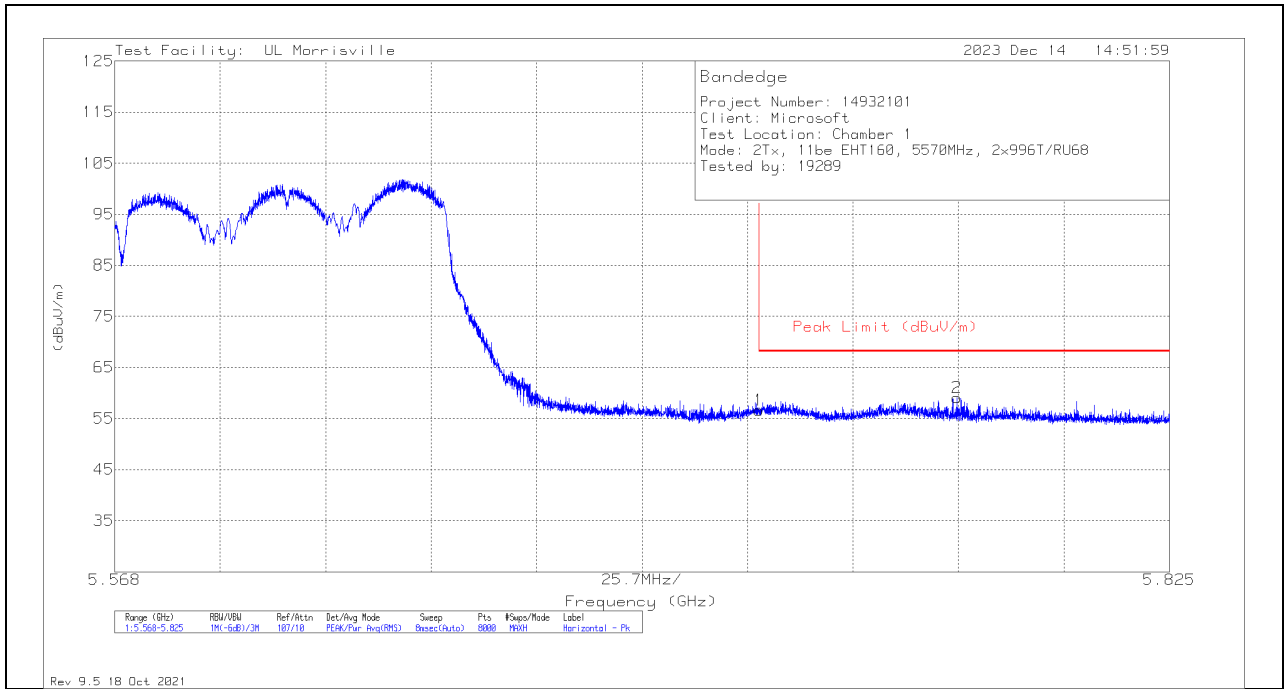

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	35.18	Pk	34.5	-23	10	56.68	68.2	-11.52	34	367	H
2	5.77324	37.62	Pk	34.6	-23.1	10	59.12	68.2	-9.08	34	367	H

Pk - Peak detector

**VERTICAL RESULT**

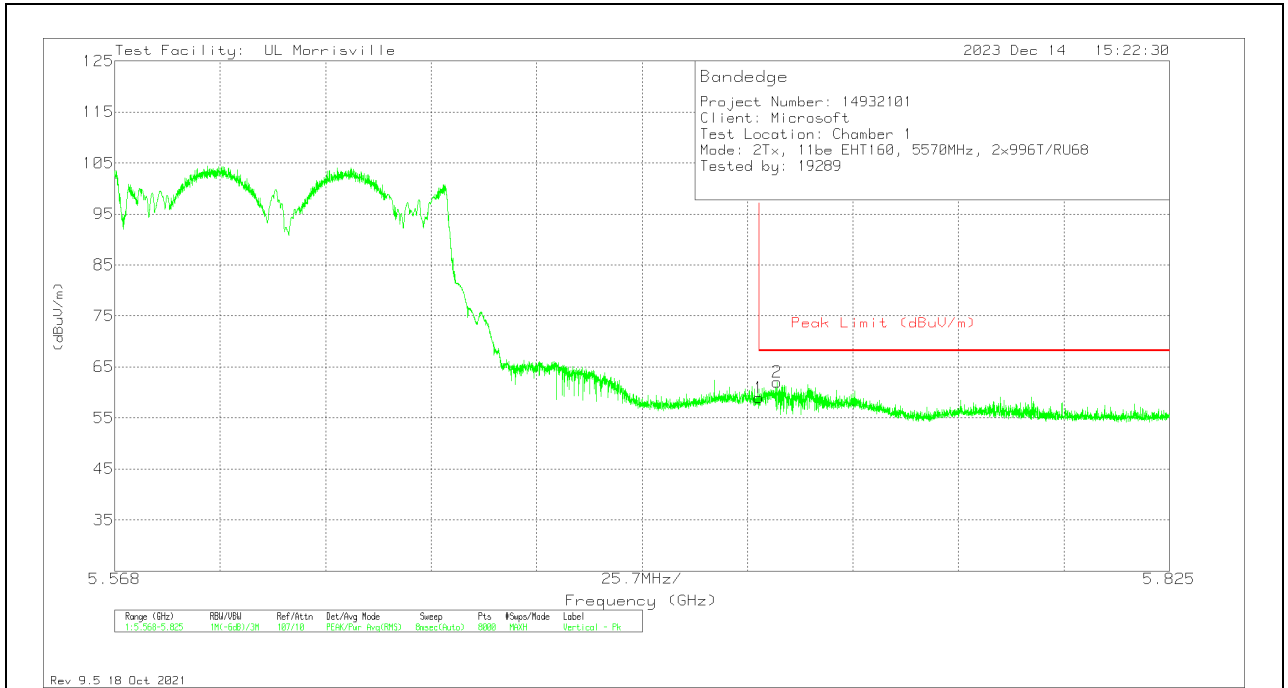

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	37.48	Pk	34.5	-23	10	58.98	68.2	-9.22	3	221	V
2	5.72945	40.52	Pk	34.5	-22.9	9.9	62.02	68.2	-6.18	3	221	V


Pk - Peak detector

### 11.1.27. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

#### 2TX CDD MODE

#### BANDEDGE (LOW EDGE)


#### HORIZONTAL RESULT

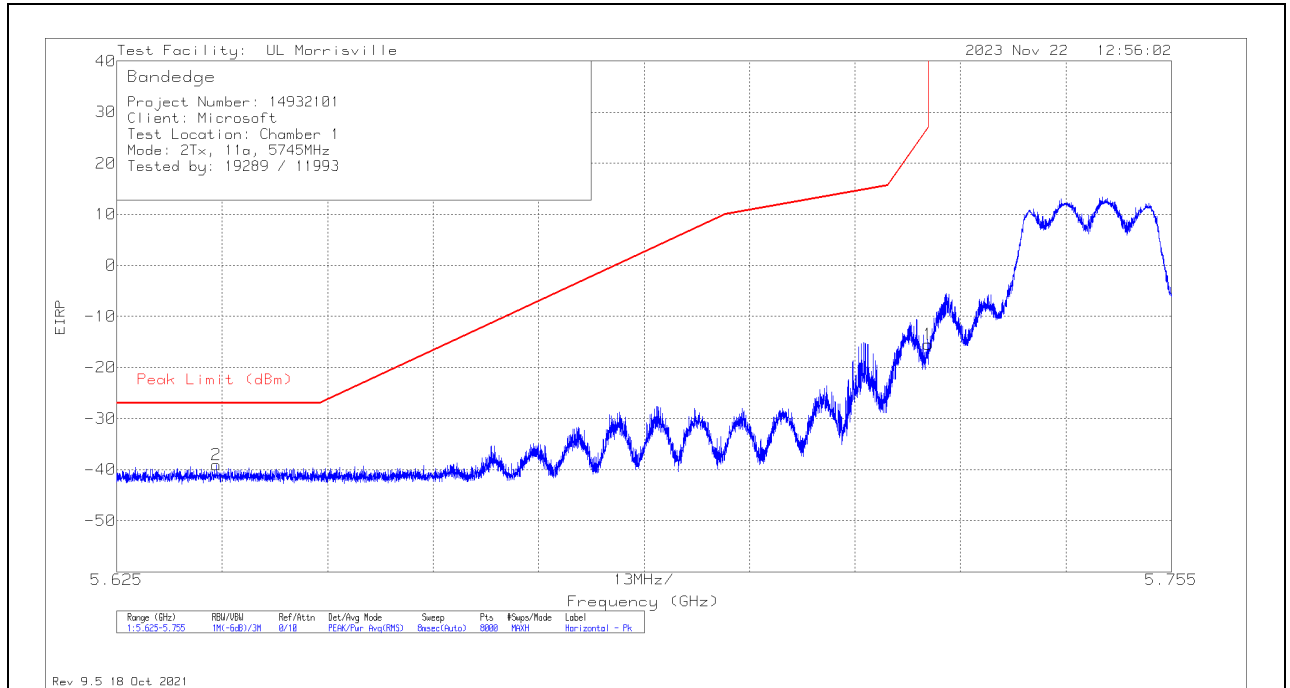

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63729	-72.5	Pk	34.4	-22.8	11.8	10	-39.1	-27	-12.1	235	357	H
1	5.725	-48.79	Pk	34.5	-23	11.8	10	-15.49	27	-42.49	235	357	H

Pk - Peak detector

**VERTICAL RESULT**

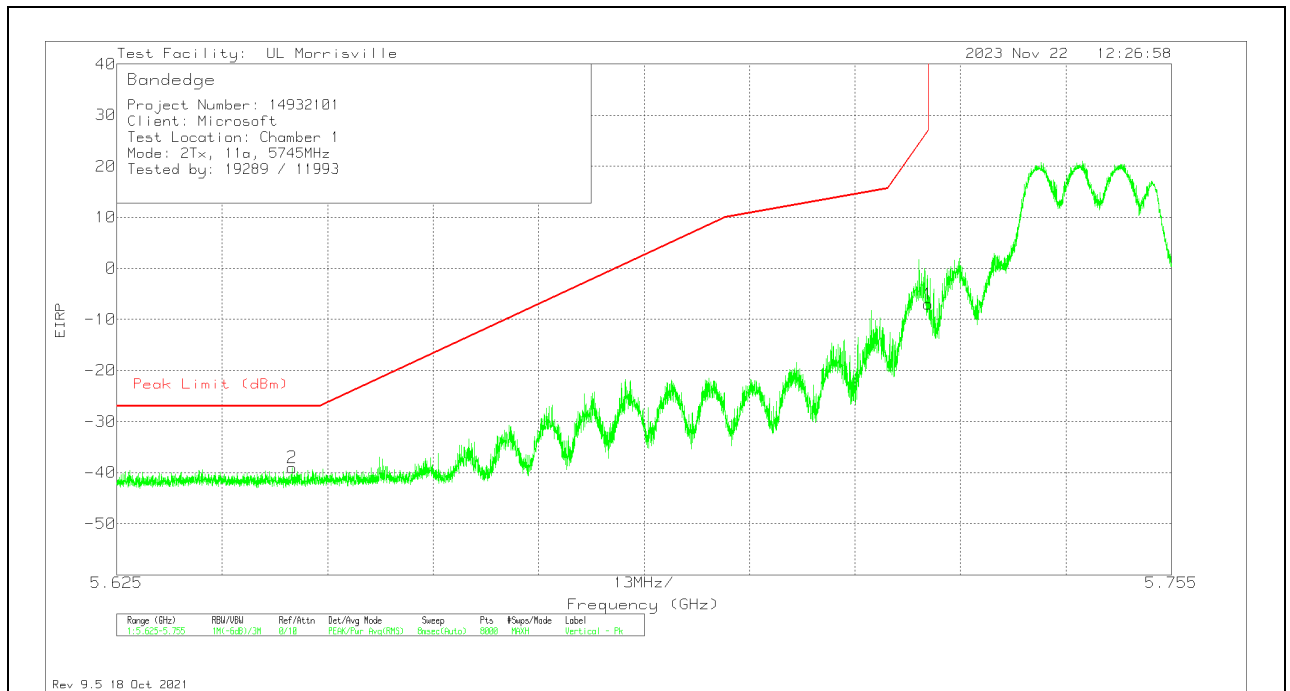


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64663	-72.2	Pk	34.4	-23	11.8	10	-39	-27	-12	315	103	V
1	5.725	-40.33	Pk	34.5	-23	11.8	10	-7.03	27	-34.03	315	103	V


Pk - Peak detector

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

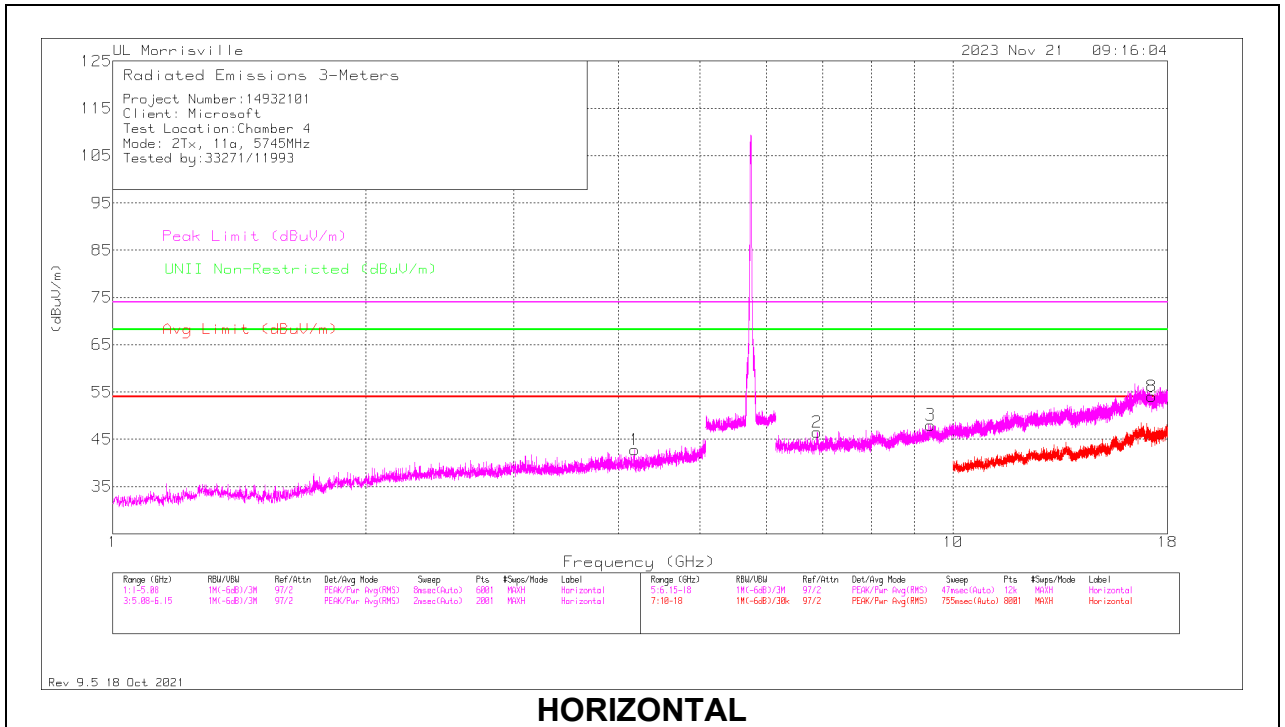

**HORIZONTAL**

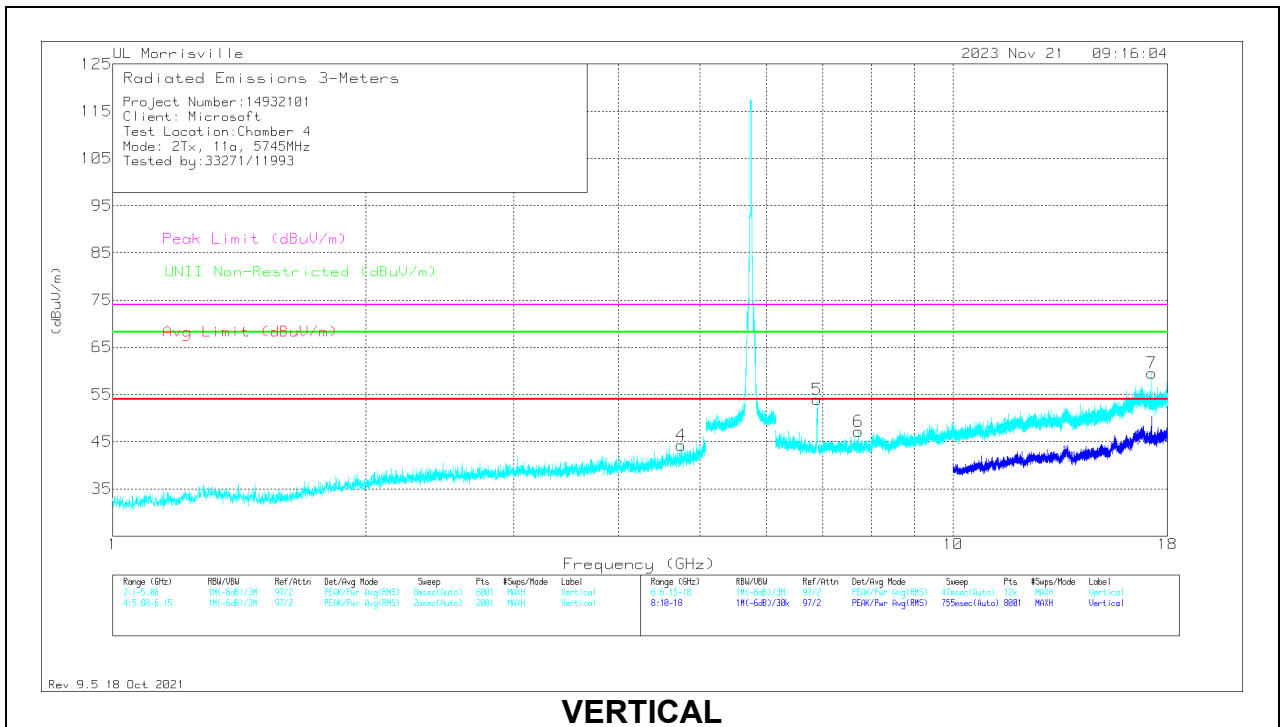


**VERTICAL**

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.17764	41.34	Pk	33.4	-31.9	42.84	54	-11.16	74	-31.16	-	-	0-360	100	H
4	* ** 4.74408	41.51	Pk	34	-31.3	44.21	54	-9.79	74	-29.79	-	-	0-360	200	V
3	* ** 9.3993	37.12	PK-U	36.6	-25.5	48.22	-	-	74	-25.78	-	-	327	177	H
	* ** 9.40119	25.02	ADV	36.6	-25.4	36.22	54	-17.78	-	-	-	-	327	177	H
6	* ** 7.72013	39.08	Pk	35.7	-27.6	47.18	54	-6.82	74	-26.82	-	-	0-360	200	V
2	6.89359	38.97	Pk	35.5	-28	46.47	-	-	-	-	68.2	-21.73	0-360	100	H
5	6.89359	46.45	Pk	35.5	-28	53.95	-	-	-	-	68.2	-14.25	0-360	200	V
8	17.23271	31.92	Pk	41.2	-19.1	54.02	-	-	-	-	68.2	-14.18	0-360	100	H
7	17.2337	37.49	Pk	41.2	-19.2	59.49	-	-	-	-	68.2	-8.71	0-360	200	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 PK-U - Maximum Peak  
 ADV - Linear Voltage Average

### MID CHANNEL RESULTS

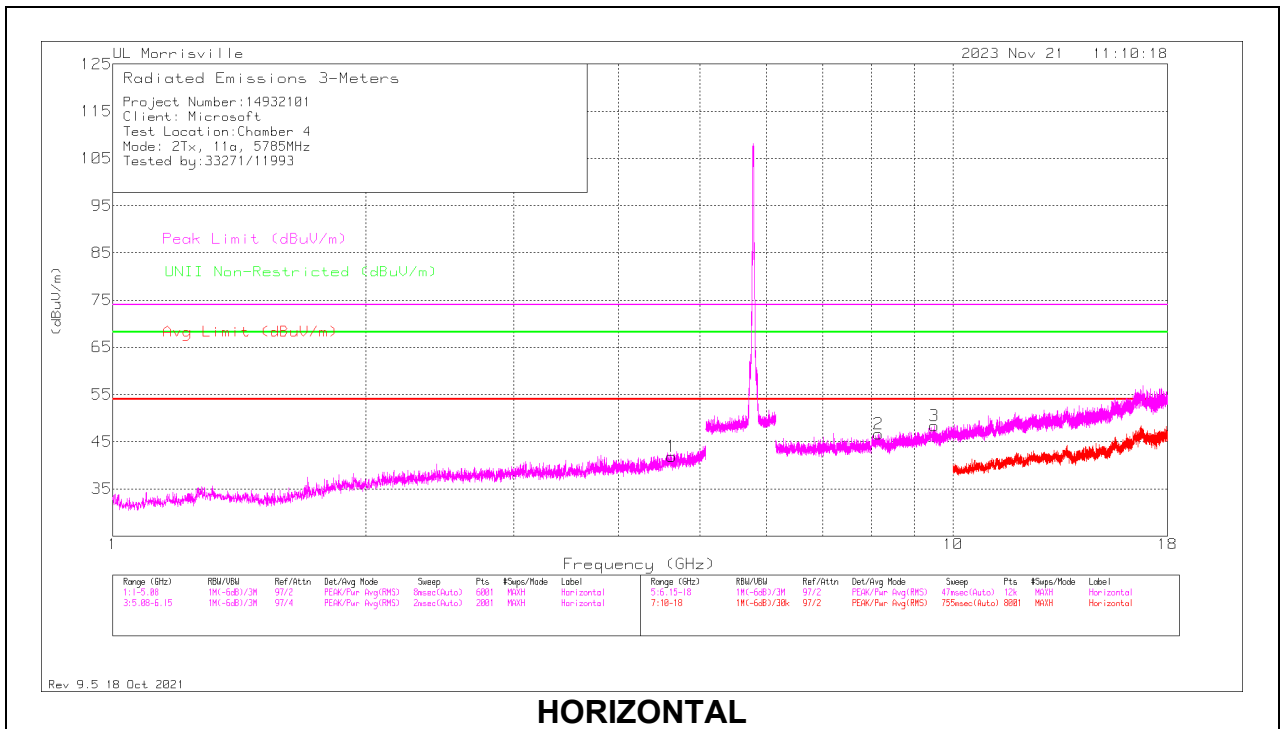

### HORIZONTAL

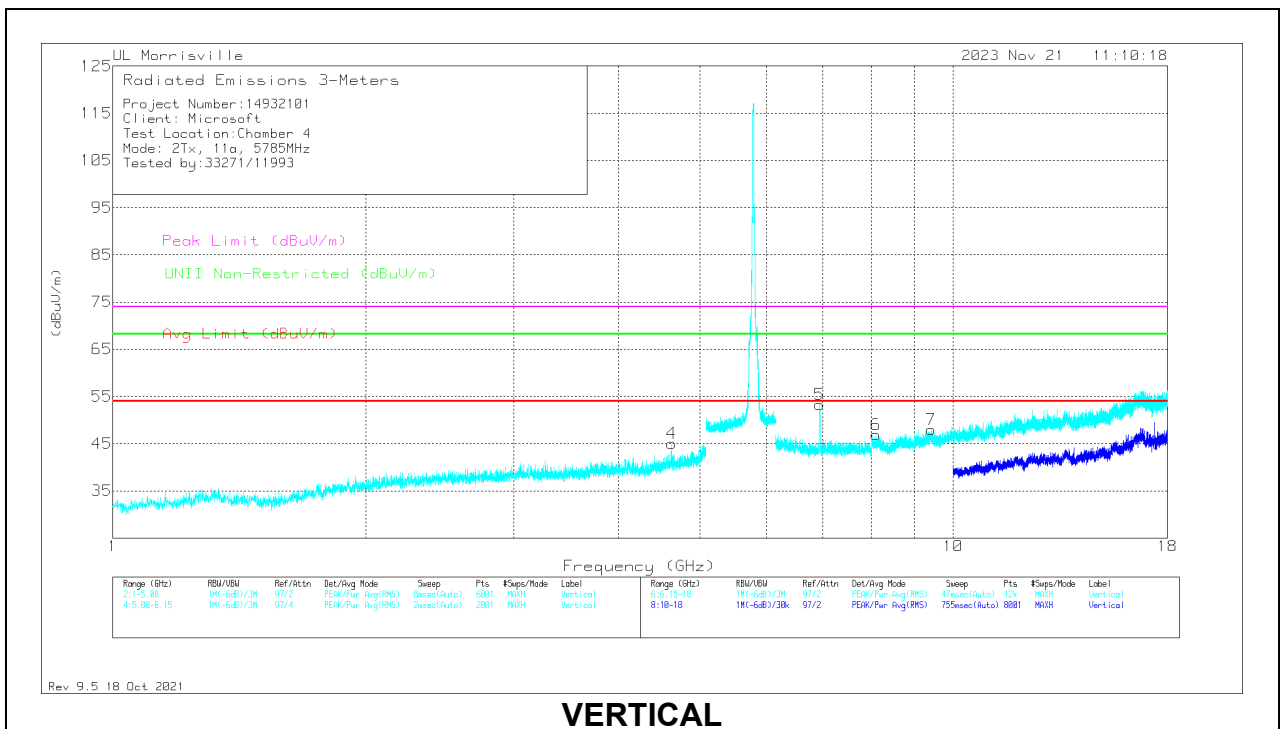

### VERTICAL




**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.6244	38.48	Pk	34.1	-30.7	41.88	54	-12.12	74	-32.12	-	-	0-360	100	H
4	*** 4.62848	41.8	Pk	34.1	-30.8	45.1	54	-8.9	74	-28.9	-	-	0-360	200	V
2	*** 8.15364	37.61	Pk	35.8	-26.8	46.61	54	-7.39	74	-27.39	-	-	0-360	200	H
3	*** 9.49496	37.64	PK-U	36.7	-25.6	48.74	-	-	74	-25.26	-	-	52	205	H
	*** 9.49459	24.9	ADV	36.7	-25.6	36	54	-18	-	-	-	-	52	205	H
6	*** 8.10328	38.19	Pk	35.8	-27.1	46.89	54	-7.11	74	-27.11	-	-	0-360	100	V
7	*** 9.41601	37.3	PK-U	36.6	-25.1	48.8	-	-	74	-25.2	-	-	228	171	V
	*** 9.41821	25.21	ADV	36.6	-25.2	36.61	54	-17.39	-	-	-	-	228	171	V
5	6.94099	45.76	Pk	35.5	-28	53.26	-	-	-	-	68.2	-14.94	0-360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 PK-U - Maximum Peak  
 ADV - Linear Voltage Average

### HIGH CHANNEL RESULTS

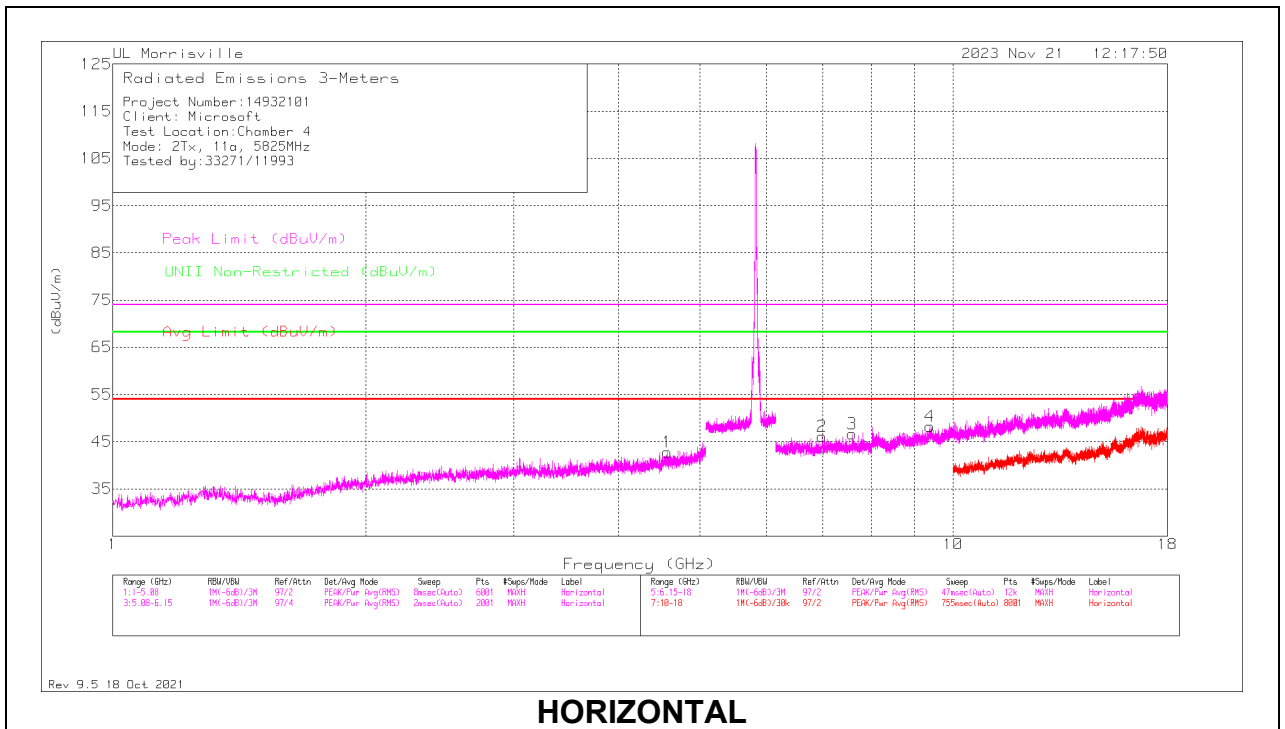

**HORIZONTAL**

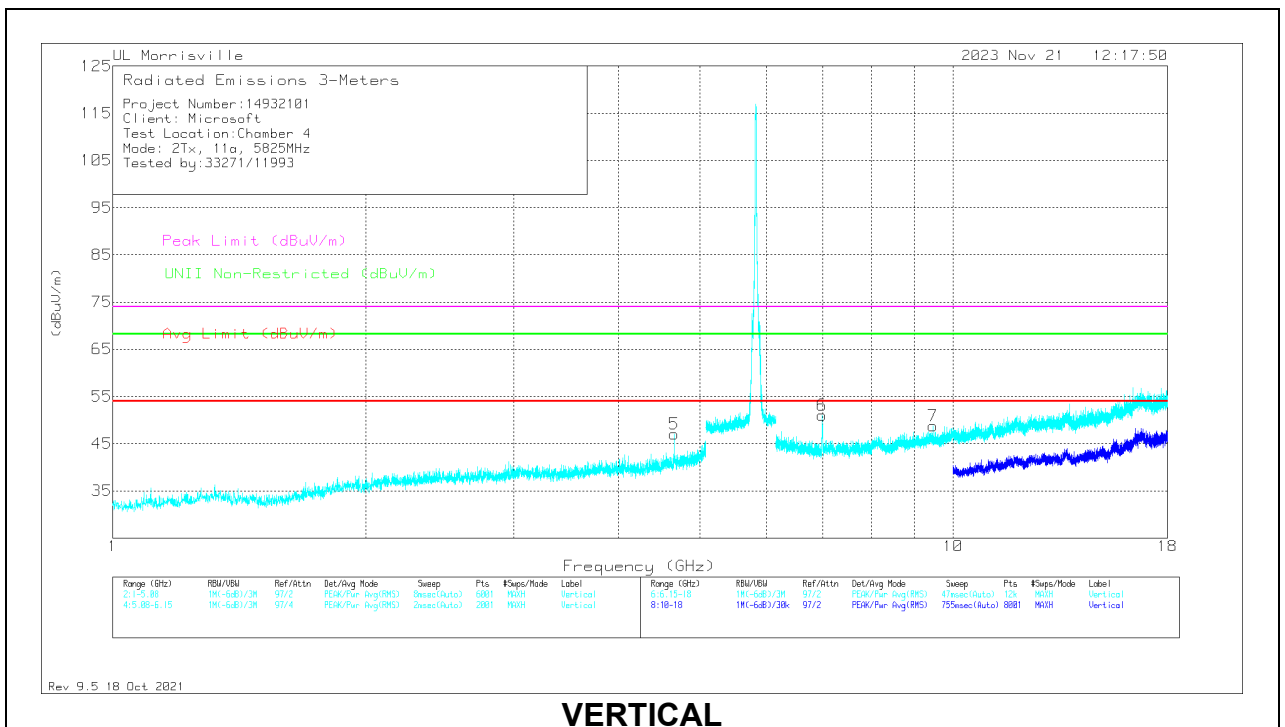

**VERTICAL**

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.57	40.03	Pk	34	-31.3	42.73	54	-11.27	74	-31.27	-	-	0-360	100	H
5	*** 4.66044	44.05	Pk	34.1	-31.1	47.05	54	-6.95	74	-26.95	-	-	0-360	200	V
3	*** 7.58978	38.31	Pk	35.7	-27.4	46.61	54	-7.39	74	-27.39	-	-	0-360	100	H
4	*** 9.38582	37.39	PK-U	36.6	-25.2	48.79	-	-	74	-25.21	-	-	332	267	H
	*** 9.38513	25.15	ADV	36.6	-25.2	36.55	54	-17.45	-	-	-	-	332	267	H
7	*** 9.46767	37.53	PK-U	36.7	-25	49.23	-	-	74	-24.77	-	-	325	249	V
	*** 9.46981	25.16	ADV	36.7	-25.2	36.66	54	-17.34	-	-	-	-	325	249	V
2	6.98938	38.54	Pk	35.5	-27.9	46.14	-	-	-	-	68.2	-22.06	0-360	100	H
6	6.98938	43.46	Pk	35.5	-27.9	51.06	-	-	-	-	68.2	-17.14	0-360	200	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK-U - Maximum Peak


ADV - Linear Voltage Average

**11.1.28. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND**

**2TX CDD MODE**

**BANDEDGE (LOW EDGE)**


**HORIZONTAL RESULT**

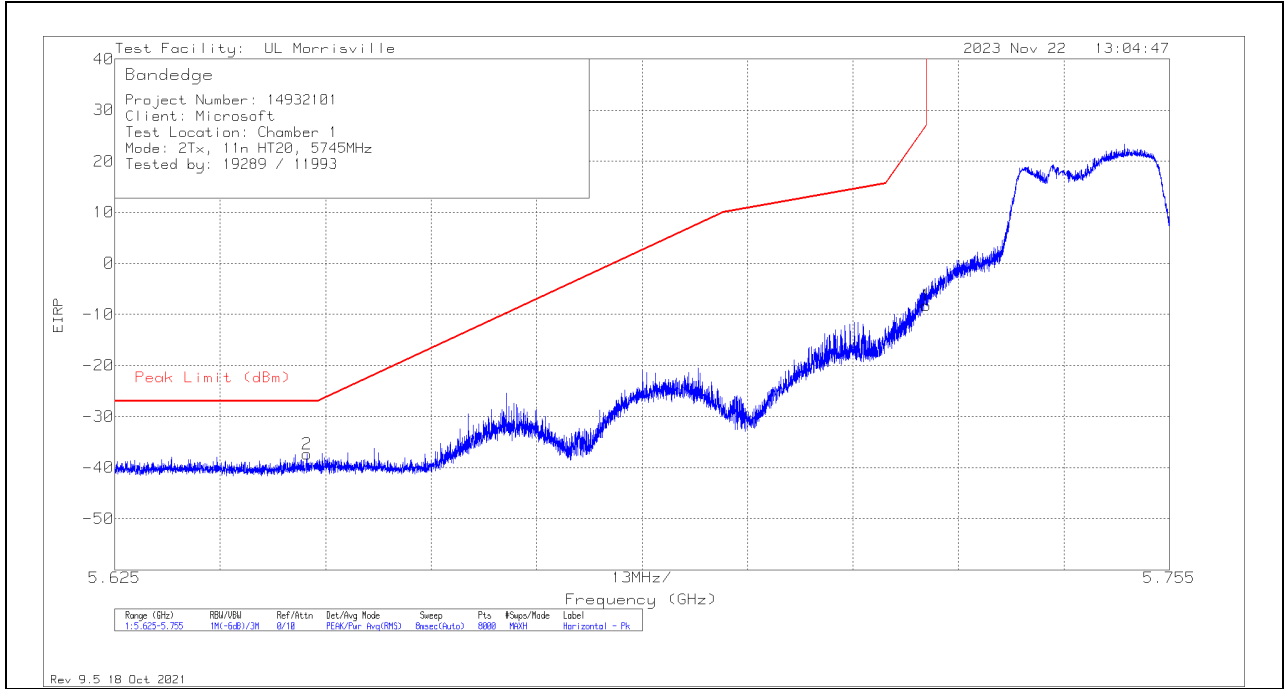

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64868	-70.59	Pk	34.4	-23	11.8	10	-37.39	-27	-10.39	30	369	H
1	5.725	-41.56	Pk	34.5	-23	11.8	10	-8.26	27	-35.26	30	369	H

Pk - Peak detector

**VERTICAL RESULT**

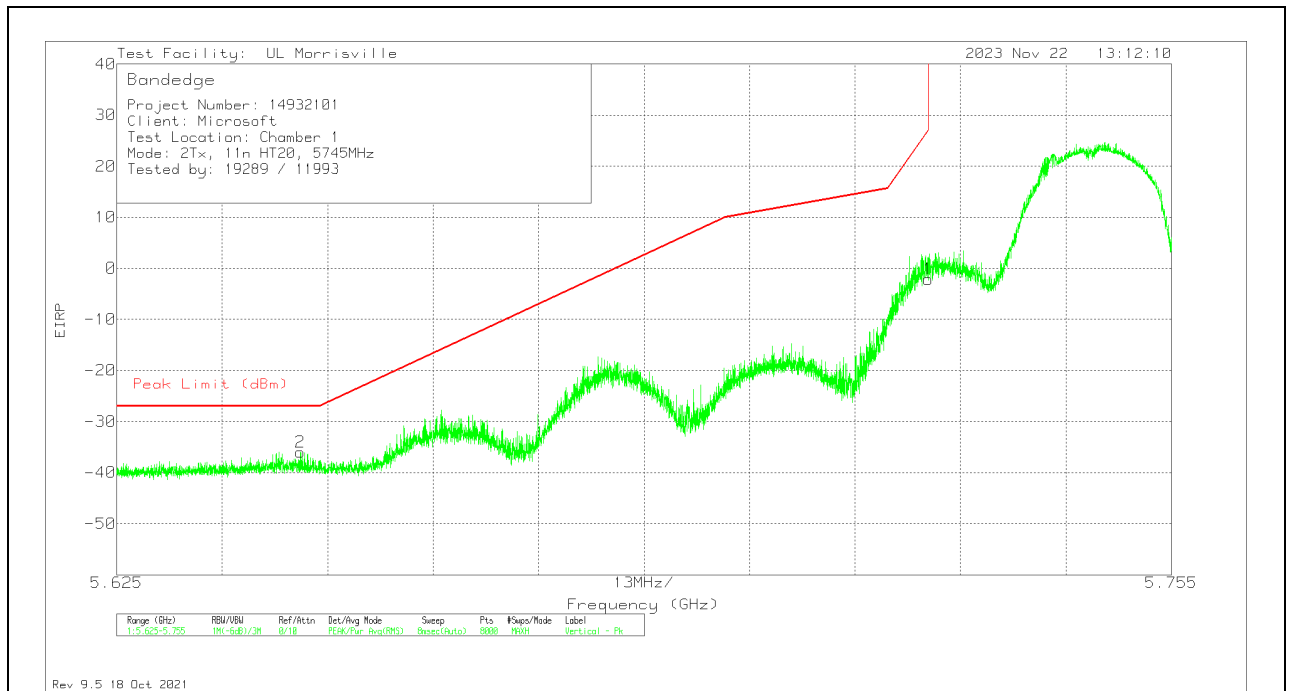

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64764	-69.17	Pk	34.4	-23	11.8	10	-35.97	-27	-8.97	358	249	V
1	5.725	-35.45	Pk	34.5	-23	11.8	10	-2.15	27	-29.15	358	249	V


Pk - Peak detector

**11.1.29. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND**

**2TX CDD MODE**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

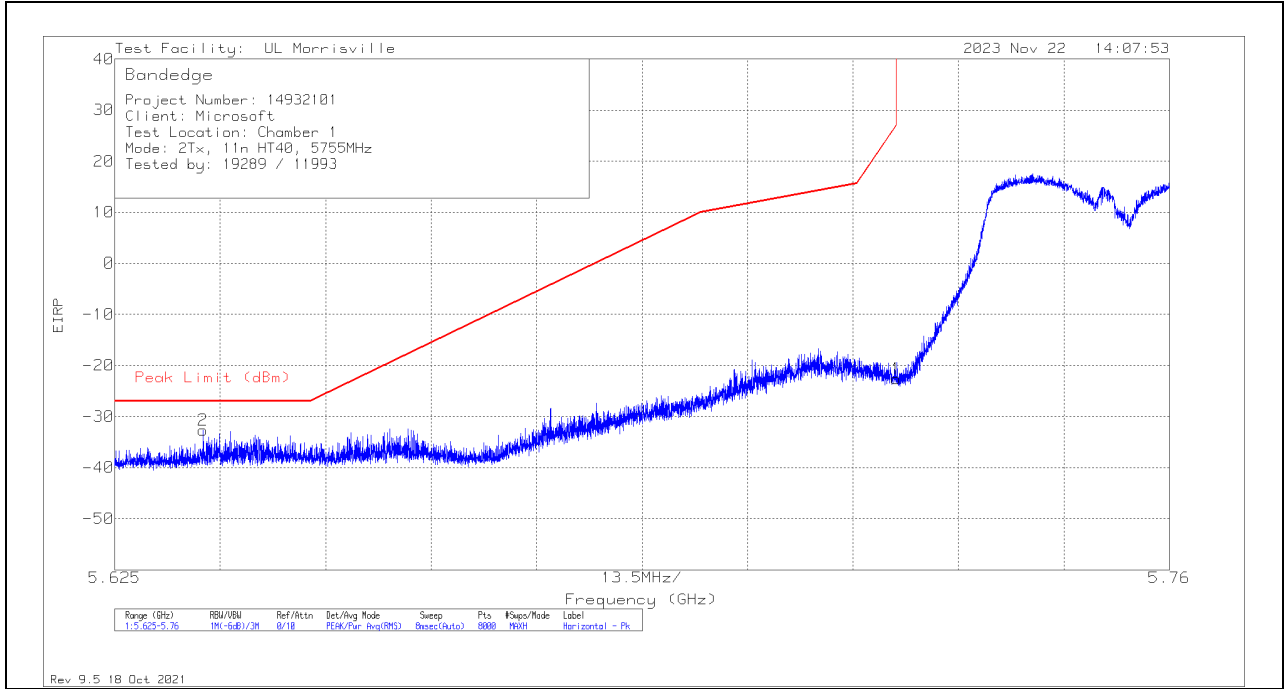

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63629	-66.05	Pk	34.4	-22.8	11.8	10	-32.65	-27	-5.65	30	389	H
1	5.725	-55.9	Pk	34.5	-23	11.8	10	-22.6	26.99	-49.59	30	389	H

Pk - Peak detector

**VERTICAL RESULT**

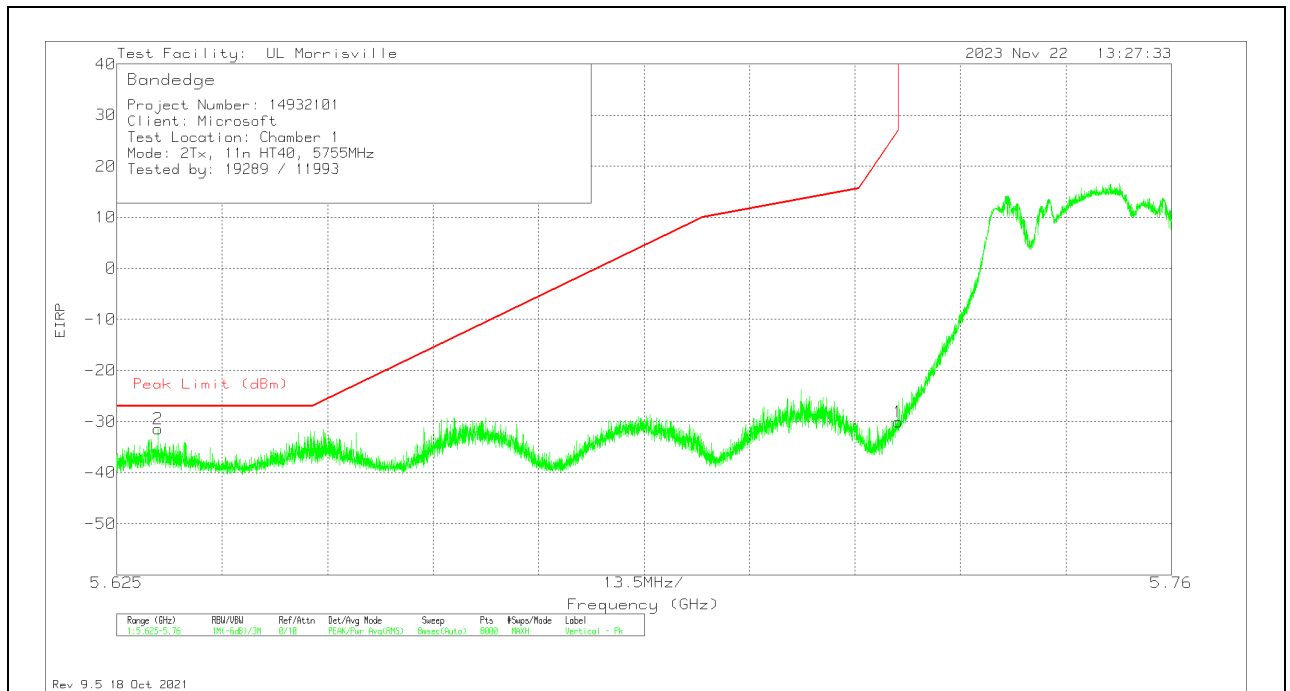

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63025	-64.72	Pk	34.4	-22.9	11.8	10	-31.42	-27	-4.42	6	272	V
1	5.725	-63.41	Pk	34.5	-23	11.8	10	-30.11	26.99	-57.1	6	272	V


Pk - Peak detector

### 11.1.30. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

#### 2TX CDD MODE

#### BANDEDGE (LOW EDGE)

#### HORIZONTAL RESULT

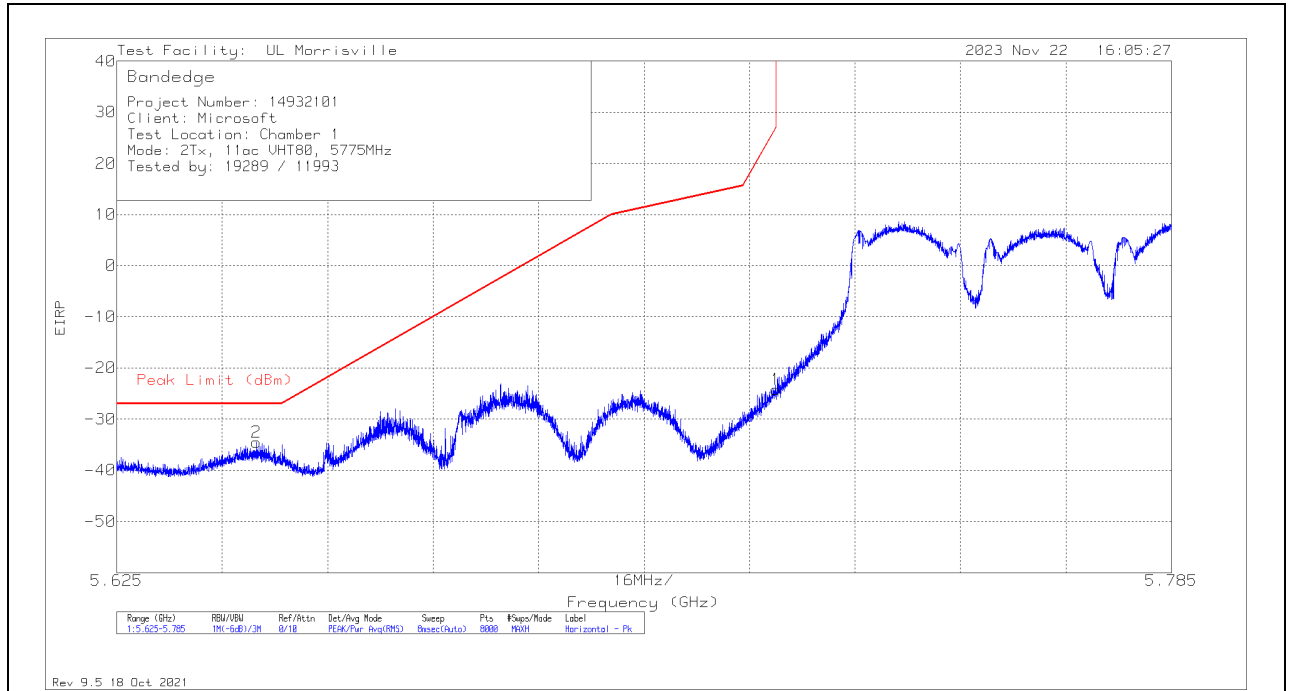


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6462	-67.75	Pk	34.4	-23	11.8	10	-34.55	-27	-7.55	18	320	H
1	5.725	-57.51	Pk	34.5	-23	11.8	10	-24.21	26.99	-51.2	18	320	H

Pk - Peak detector



**VERTICAL RESULT**

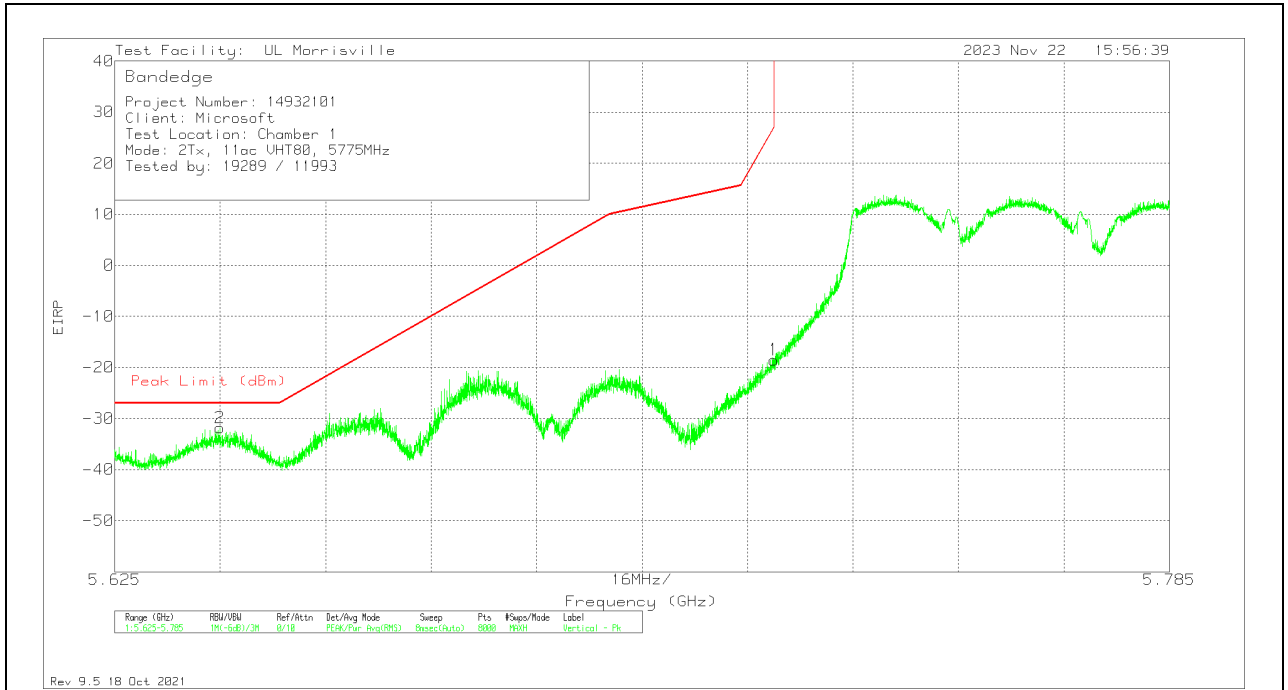

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64096	-65.12	Pk	34.4	-22.9	11.8	10	-31.82	-27	-4.82	17	285	V
1	5.725	-51.79	Pk	34.5	-23	11.8	10	-18.49	26.99	-45.48	17	285	V


Pk - Peak detector

**11.1.30. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE 5.8 GHz BAND**

**2TX CDD MODE – 26T**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

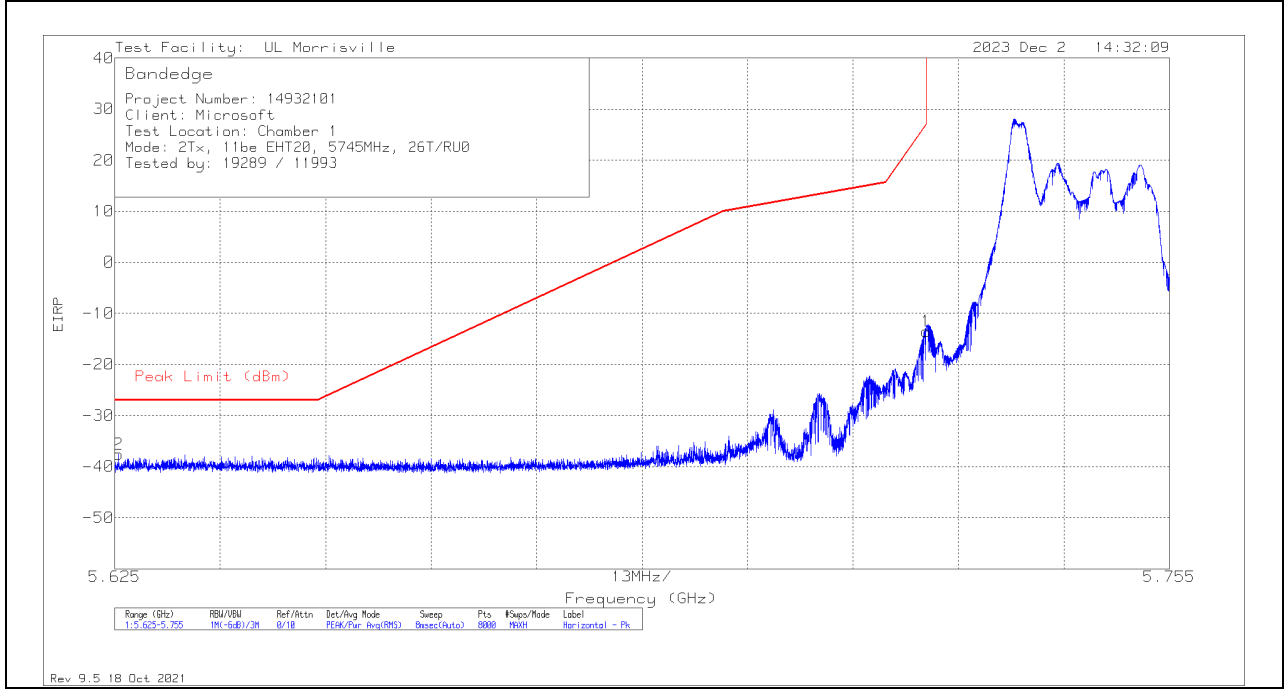

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62547	-70.8	Pk	34.4	-23	11.8	10	-37.6	-27	-10.6	41	384	H
1	5.725	-46.78	Pk	34.5	-23	11.8	10	-13.48	27	-40.48	41	384	H

Pk - Peak detector

**VERTICAL RESULT**

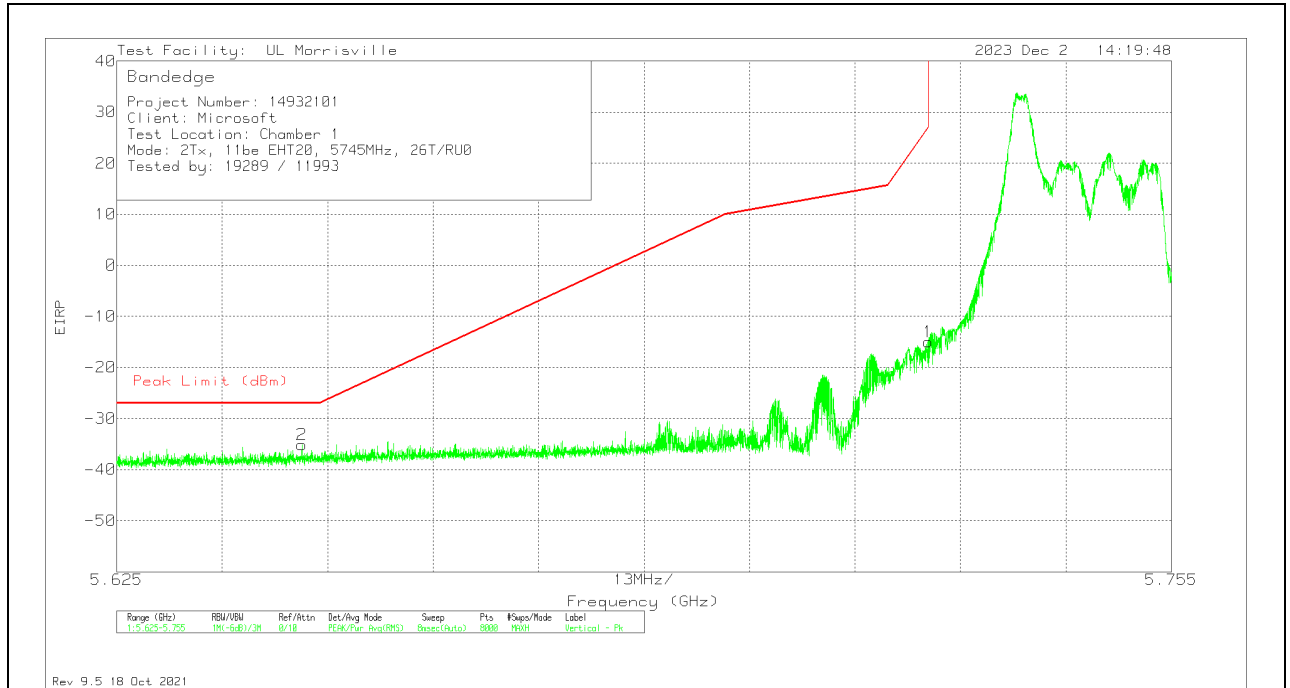


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64782	-68.34	Pk	34.4	-23	11.8	10	-35.14	-27	-8.14	353	225	V
1	5.725	-48.25	Pk	34.5	-23	11.8	10	-14.95	27	-41.95	353	225	V


Pk - Peak detector

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

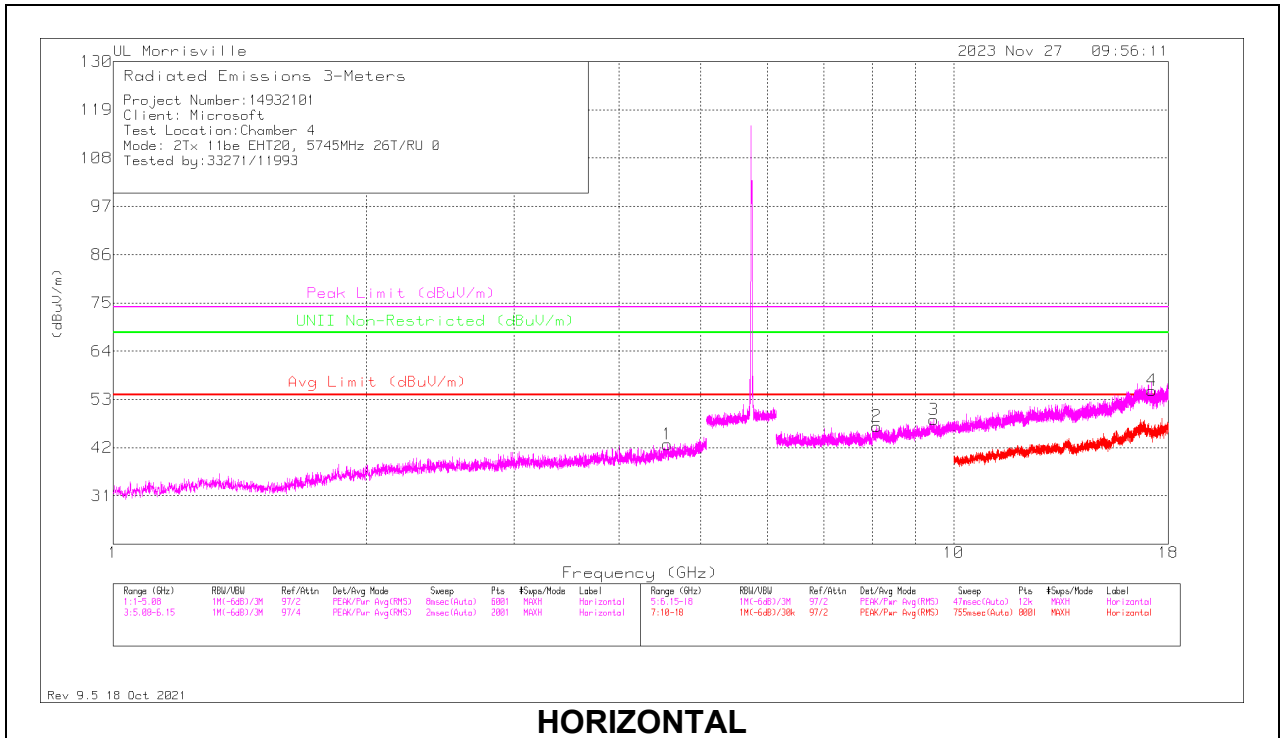

**HORIZONTAL**

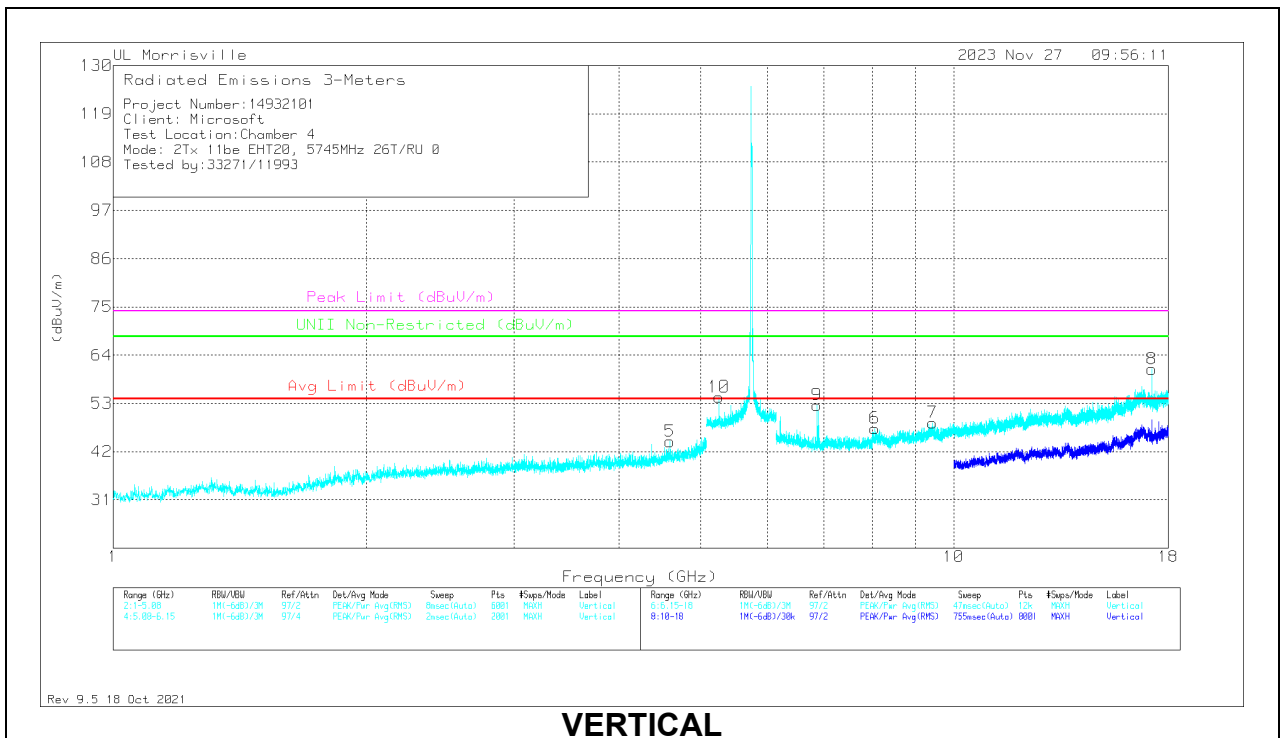


**VERTICAL**

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.56524	39.94	Pk	34	-31.2	42.74	54	-11.26	74	-31.26	-	-	0-360	100	H
5	*** 4.59584	41.53	Pk	34.1	-31.3	44.33	54	-9.67	74	-29.67	-	-	0-360	200	V
2	*** 8.09735	38.07	Pk	35.8	-27	46.87	54	-7.13	74	-27.13	-	-	0-360	100	H
3	*** 9.46792	37.54	PK-U	36.7	-25	49.24	-	-	74	-24.76	-	-	171	184	H
	*** 9.46834	25.02	ADV	36.7	-25.1	36.62	54	-17.38	-	-	-	-	171	184	H
6	*** 8.05193	39.21	Pk	35.8	-27.7	47.31	54	-6.69	74	-26.69	-	-	0-360	200	V
7	*** 9.4312	37.73	PK-U	36.7	-25.5	48.93	-	-	74	-25.07	-	-	193	240	V
	*** 9.43143	25.09	ADV	36.7	-25.5	36.29	54	-17.71	-	-	-	-	193	240	V
10	5.25655	29.53	Pk	34.2	-9.3	54.43	-	-	-	-	68.2	-13.77	0-360	200	V
9	6.87729	44.71	Pk	35.5	-27.6	52.61	-	-	-	-	68.2	-15.59	0-360	200	V
8	17.21	39.22	Pk	41.3	-19.7	60.82	-	-	-	-	68.2	-7.38	0-360	200	V
4	17.21395	33.62	Pk	41.3	-19.9	55.02	-	-	-	-	68.2	-13.18	0-360	100	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 PK-U - Maximum Peak  
 ADV - Linear Voltage Average

### MID CHANNEL RESULTS

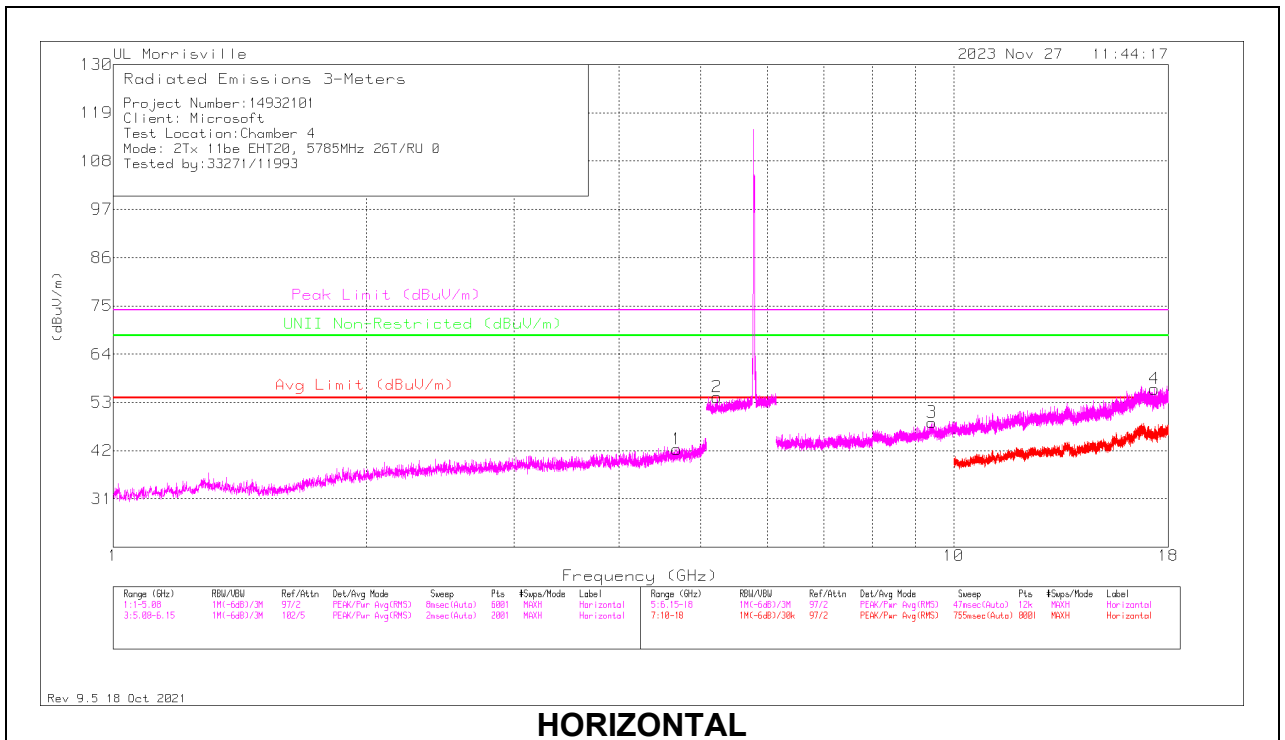

### HORIZONTAL

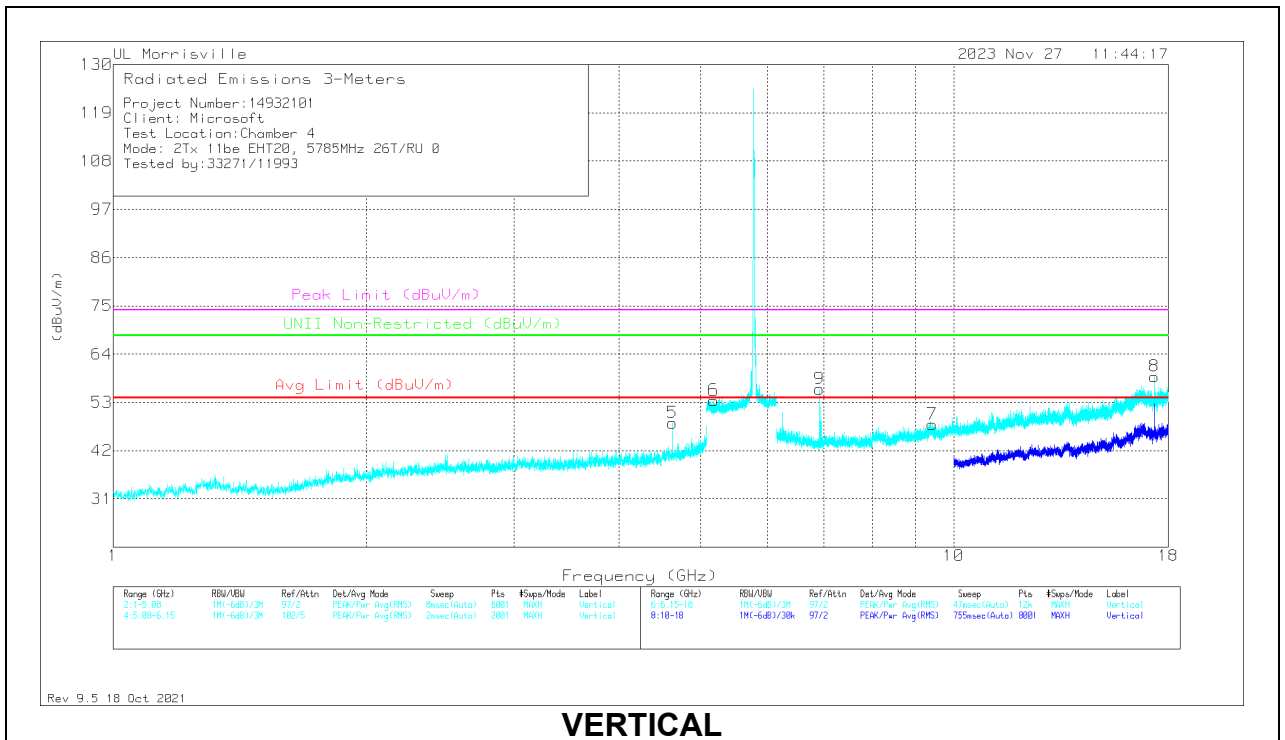


### VERTICAL

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.68492	39.72	Pk	34.1	-31.5	42.32	54	-11.68	74	-31.68	-	-	0-360	100	H
5	*** 4.6279	48.95	PK-U	34.1	-30.8	52.25	-	-	74	-21.75	-	-	30	283	V
	*** 4.62805	36.36	ADV	34.1	-30.8	39.66	54	-14.34	-	-	-	-	30	283	V
2	** 5.22677	29.25	PK-U	34.2	-9.3	54.15	-	-	74	-19.85	68.2	-14.05	122	170	H
	** 5.22778	16.58	ADV	34.2	-9.3	41.48	54	-12.52	-	-	-	-	122	170	H
6	** 5.17623	29.29	PK-U	34.2	-9.3	54.19	-	-	74	-19.81	68.2	-14.01	7	291	V
	** 5.17557	16.65	ADV	34.2	-9.3	41.55	54	-12.45	-	-	-	-	7	291	V
3	*** 9.42884	37.39	PK-U	36.7	-25.4	48.69	-	-	74	-25.31	-	-	68	116	H
	*** 9.42792	25.21	ADV	36.7	-25.4	36.51	54	-17.49	-	-	-	-	68	116	H
7	*** 9.4314	38.57	PK-U	36.7	-25.5	49.77	-	-	74	-24.23	-	-	63	258	V
	*** 9.43035	25.59	ADV	36.7	-25.5	36.79	54	-17.21	-	-	-	-	63	258	V
9	6.92519	48.47	Pk	35.5	-27.9	56.07	-	-	-	-	68.2	-12.13	0-360	100	V
4	17.32949	35.39	Pk	41.2	-20.5	56.09	-	-	-	-	68.2	-12.11	0-360	200	H
8	17.32949	38.23	Pk	41.2	-20.5	58.93	-	-	-	-	68.2	-9.27	0-360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 PK-U - Maximum Peak  
 ADV - Linear Voltage Average

### HIGH CHANNEL RESULTS

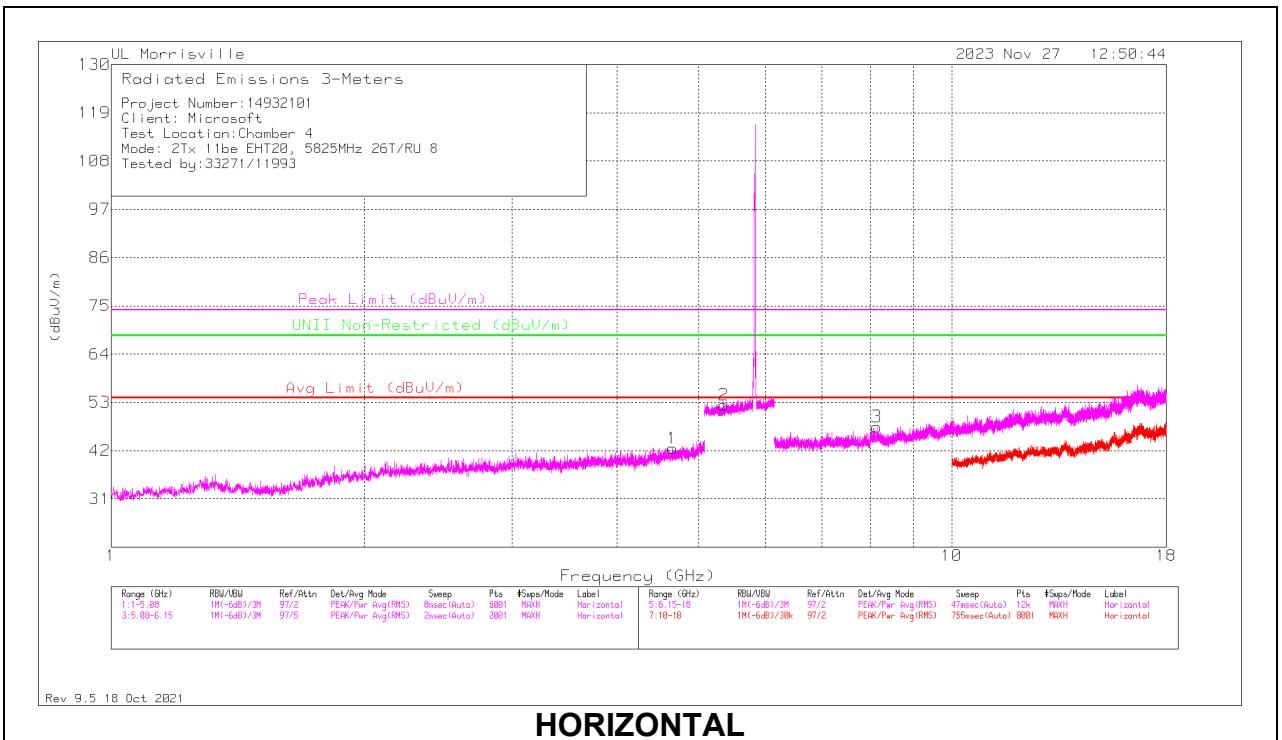

### HORIZONTAL

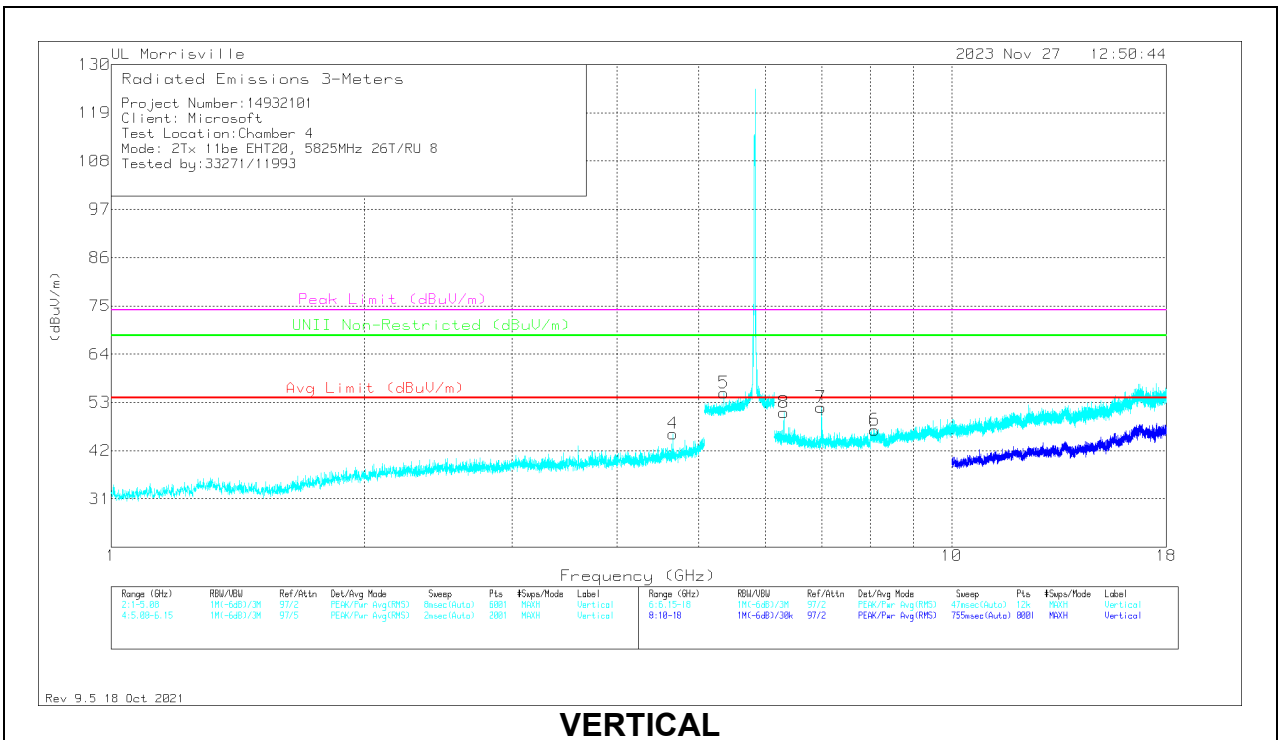

### VERTICAL



**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.65432	39.21	Pk	34.1	-30.8	42.51	54	-11.49	74	-31.49	-	-	0-360	100	H
4	*** 4.66044	42.88	Pk	34.1	-31.1	45.88	54	-8.12	74	-28.12	-	-	0-360	200	V
2	*** 5.35255	29.78	PK-U	34.4	-9.2	54.98	-	-	74	-19.02	-	-	292	399	H
	*** 5.35343	17.79	ADV	34.4	-9.2	42.99	54	-11.01	-	-	-	-	292	399	H
5	*** 5.354	36.22	PK-U	34.4	-9.2	61.42	-	-	74	-12.58	-	-	49	123	V
	*** 5.35386	25.61	ADV	34.4	-9.2	50.81	54	-3.19	-	-	-	-	49	123	V
3	*** 8.14574	38.71	Pk	35.8	-27.1	47.41	54	-6.59	74	-26.59	-	-	0-360	100	H
6	*** 8.1013	38.12	Pk	35.8	-27.2	46.72	54	-7.28	74	-27.28	-	-	0-360	200	V
8	6.31294	44.12	Pk	35.4	-28.8	50.72	-	-	-	-	68.2	-17.48	0-360	200	V
7	6.98938	44.31	Pk	35.5	-27.9	51.91	-	-	-	-	68.2	-16.29	0-360	200	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 PK-U - Maximum Peak  
 ADV - Linear Voltage Average

**2TX CDD MODE – 52T**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

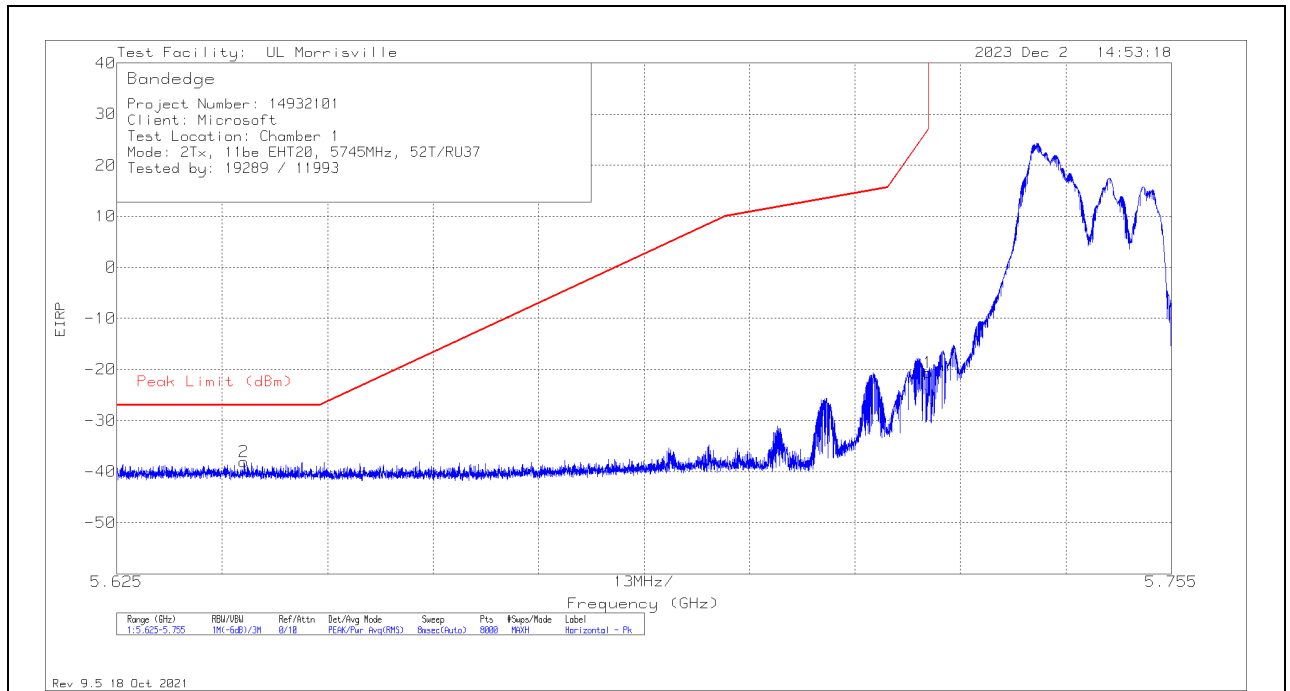

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6407	-71.34	Pk	34.4	-22.9	11.8	10	-38.04	-27	-11.04	26	386	H
1	5.725	-53.96	Pk	34.5	-23	11.8	10	-20.66	27	-47.66	26	386	H

Pk - Peak detector

**VERTICAL RESULT**

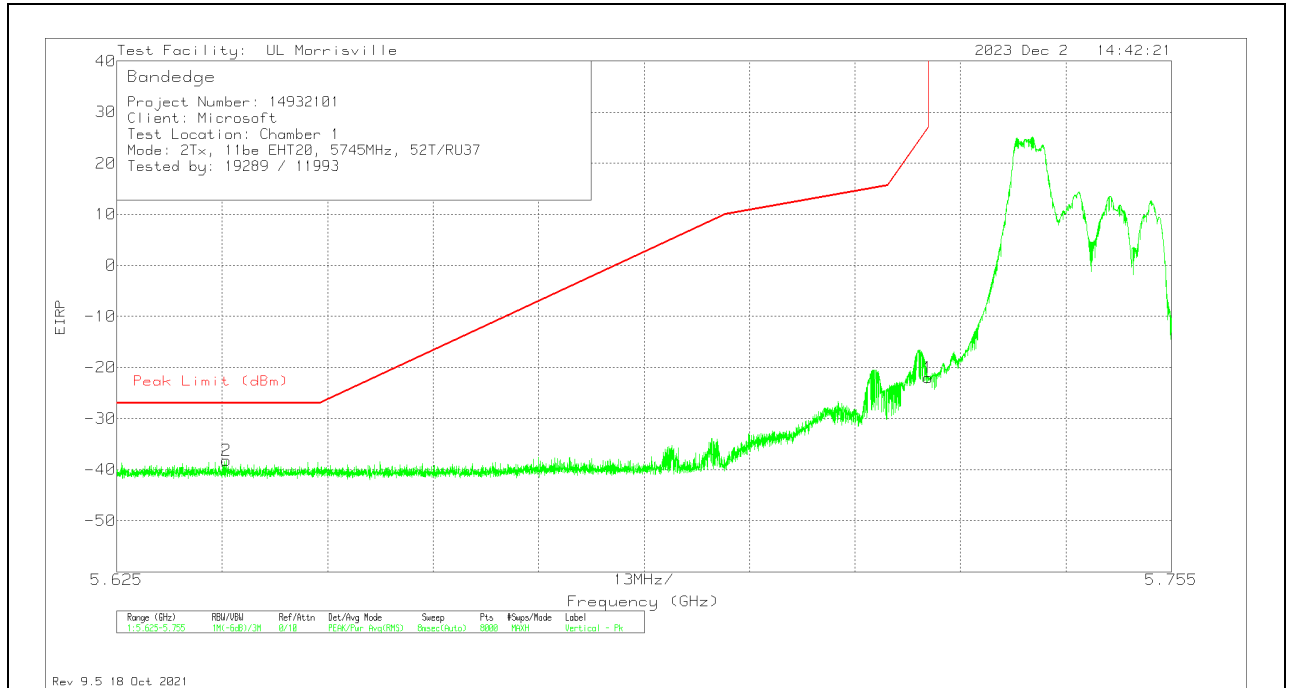


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63852	-71.45	Pk	34.4	-22.9	11.8	10	-38.15	-27	-11.15	25	386	V
1	5.725	-55.25	Pk	34.5	-23	11.8	10	-21.95	27	-48.95	25	386	V

Pk - Peak detector

**2TX CDD MODE – 52T+26T**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

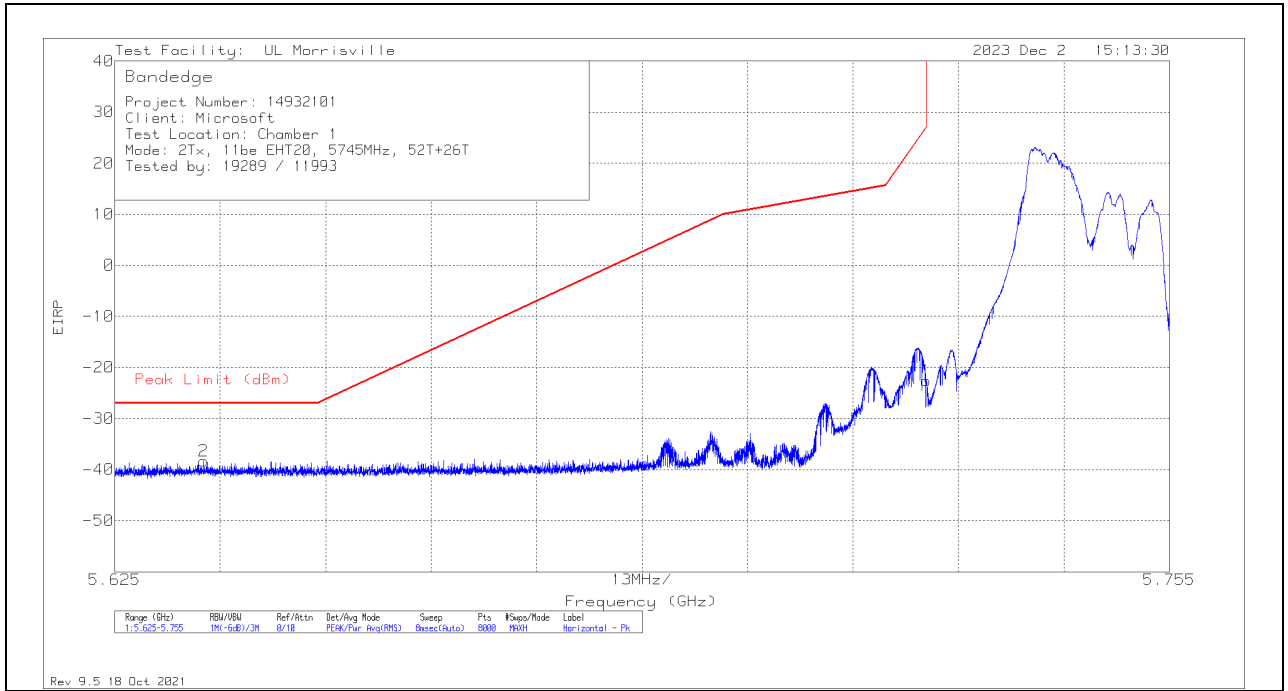

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63594	-71.72	Pk	34.4	-22.8	11.8	10	-38.32	-27	-11.32	17	312	H
1	5.725	-55.93	Pk	34.5	-23	11.8	10	-22.63	27	-49.63	17	312	H

Pk - Peak detector

**VERTICAL RESULT**

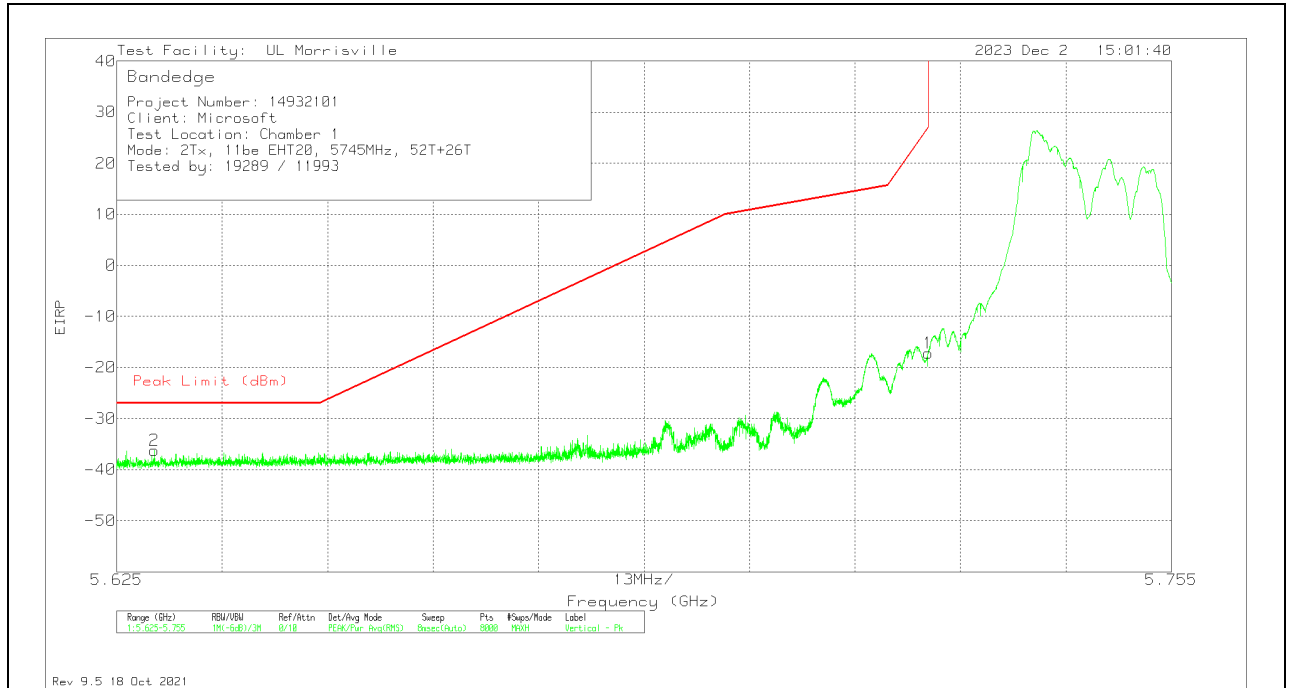


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62963	-69.49	Pk	34.4	-22.9	11.8	10	-36.19	-27	-9.19	355	309	V
1	5.725	-50.5	Pk	34.5	-23	11.8	10	-17.2	27	-44.2	355	309	V

Pk - Peak detector

**2TX CDD MODE – 106T**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

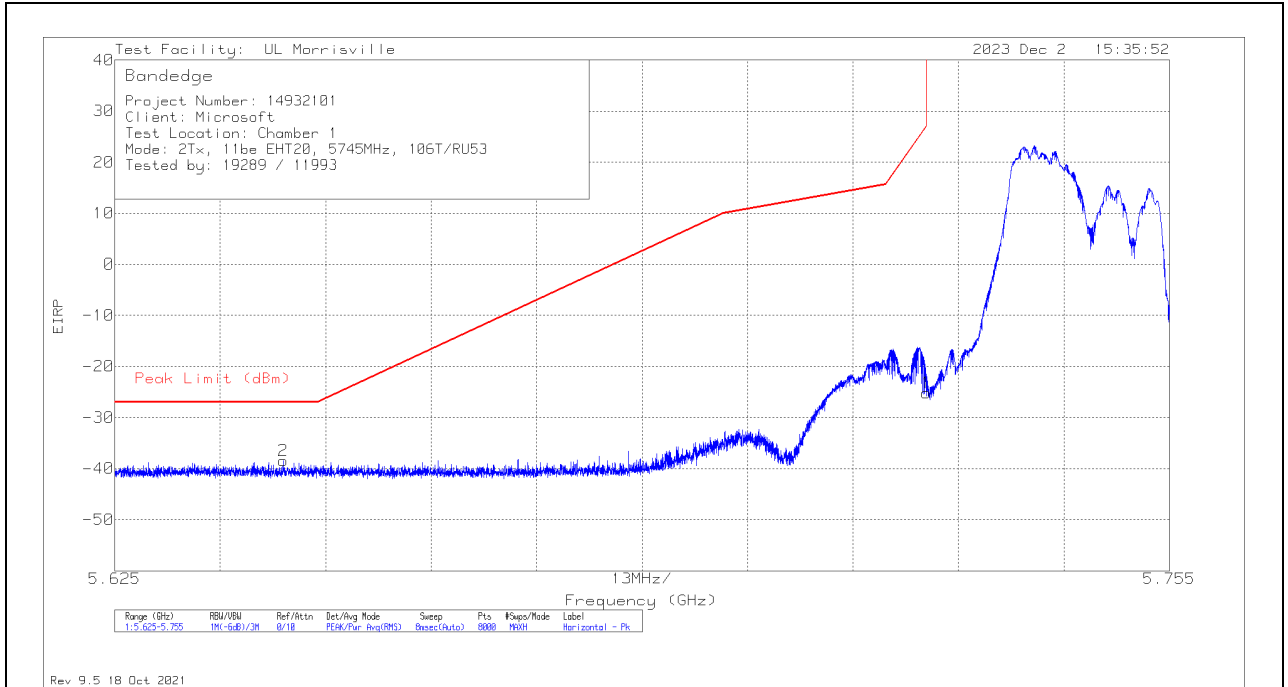

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64575	-71.6	Pk	34.4	-23	11.8	10	-38.4	-27	-11.4	17	307	H
1	5.725	-58.52	Pk	34.5	-23	11.8	10	-25.22	27	-52.22	17	307	H

Pk - Peak detector

**VERTICAL RESULT**

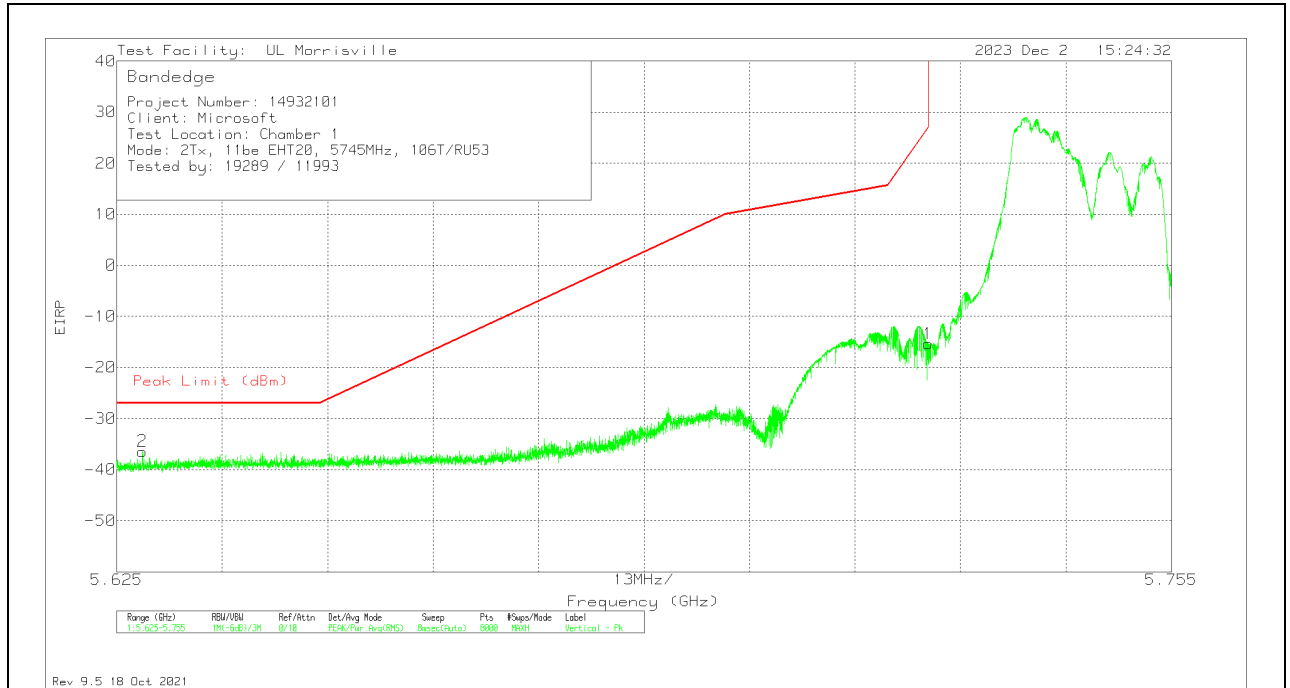


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62819	-69.72	Pk	34.4	-22.9	11.8	10	-36.42	-27	-9.42	352	241	V
1	5.725	-48.67	Pk	34.5	-23	11.8	10	-15.37	27	-42.37	352	241	V

Pk - Peak detector

**2TX CDD MODE – 106T+26T**

**BANDEDGE (LOW CHANNEL)**

**HORIZONTAL RESULT**

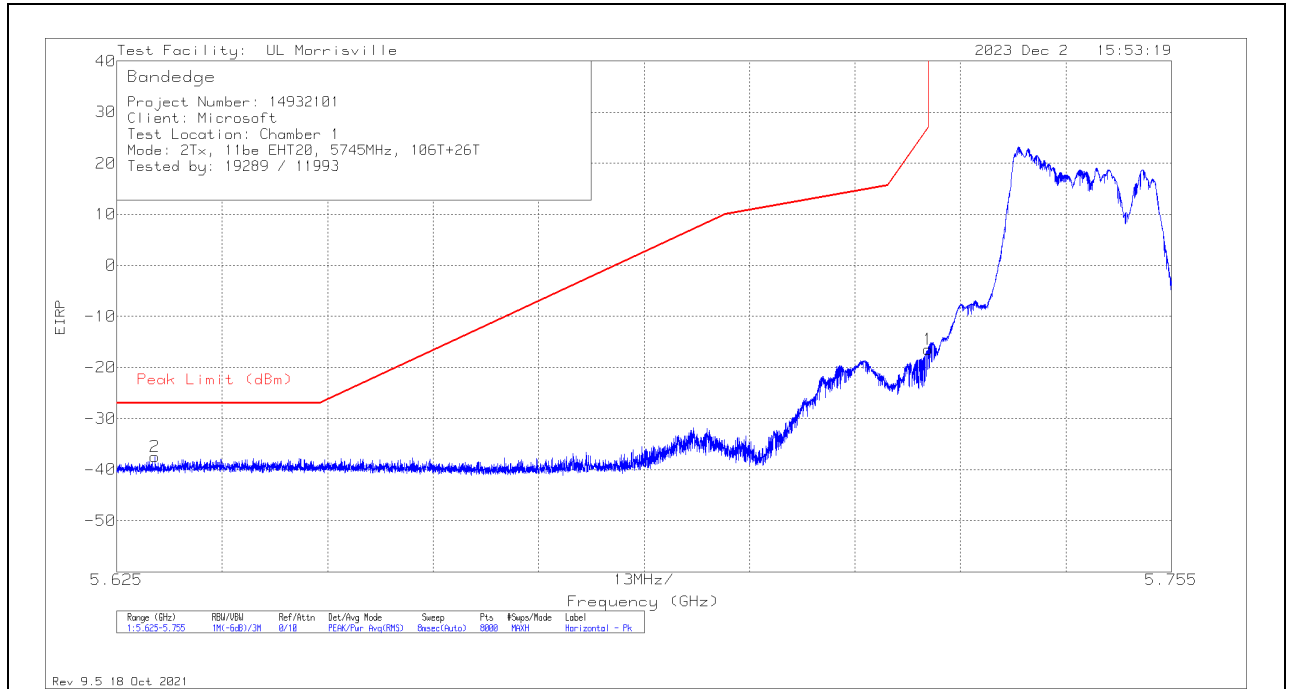


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62968	-70.73	Pk	34.4	-22.9	11.8	10	-37.43	-27	-10.43	31	382	H
1	5.725	-49.76	Pk	34.5	-23	11.8	10	-16.46	27	-43.46	31	382	H

Pk - Peak detector



**VERTICAL RESULT**

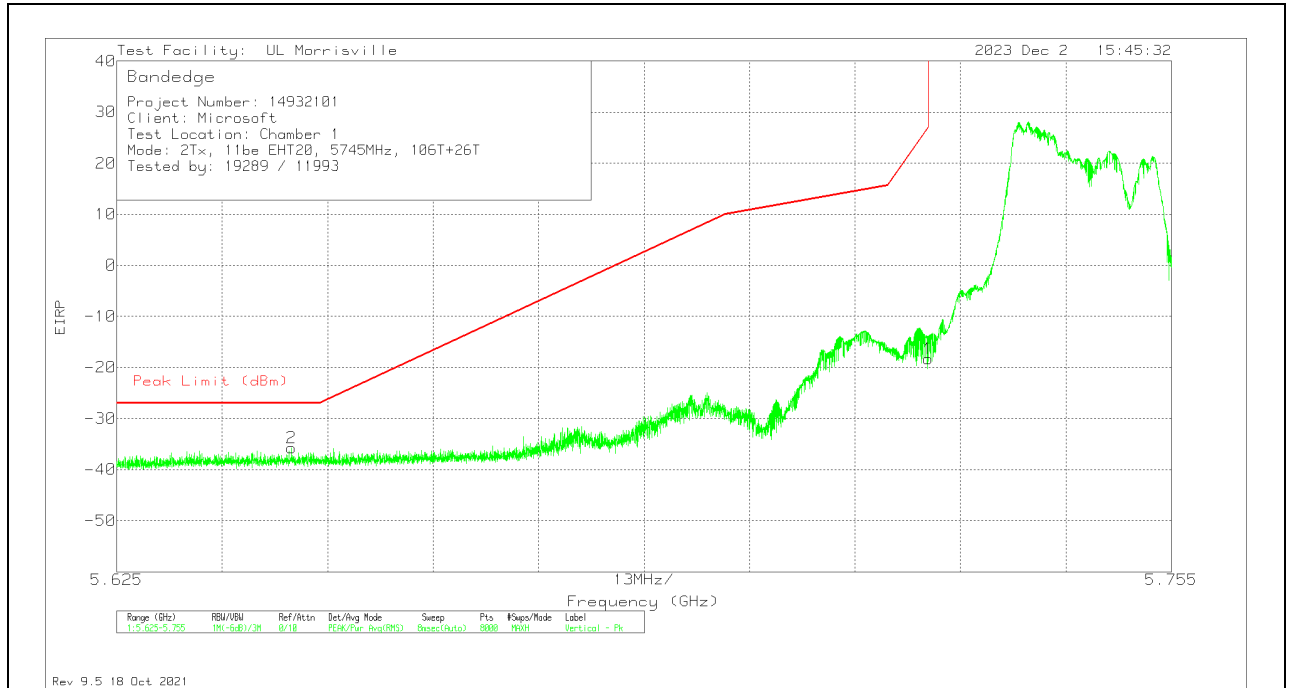


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64657	-68.99	Pk	34.4	-23	11.8	10	-35.79	-27	-8.79	352	217	V
1	5.725	-51.6	Pk	34.5	-23	11.8	10	-18.3	27	-45.3	352	217	V

Pk - Peak detector

**2TX CDD MODE – 242T**

**BANDEDGE (LOW CHANNEL)**


**HORIZONTAL RESULT**

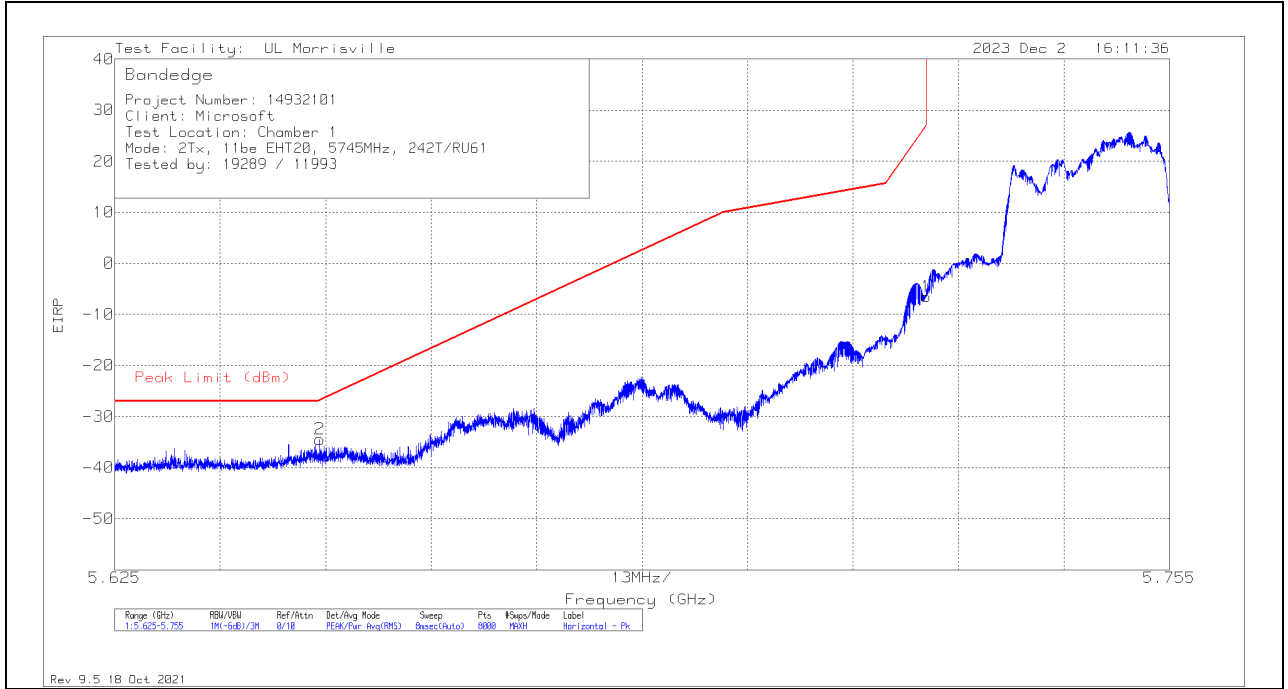

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65029	-67.65	Pk	34.4	-23	11.8	10	-34.45	-26.79	-7.66	42	380	H
1	5.725	-39.82	Pk	34.5	-23	11.8	10	-6.52	27	-33.52	42	380	H

Pk - Peak detector

**VERTICAL RESULT**

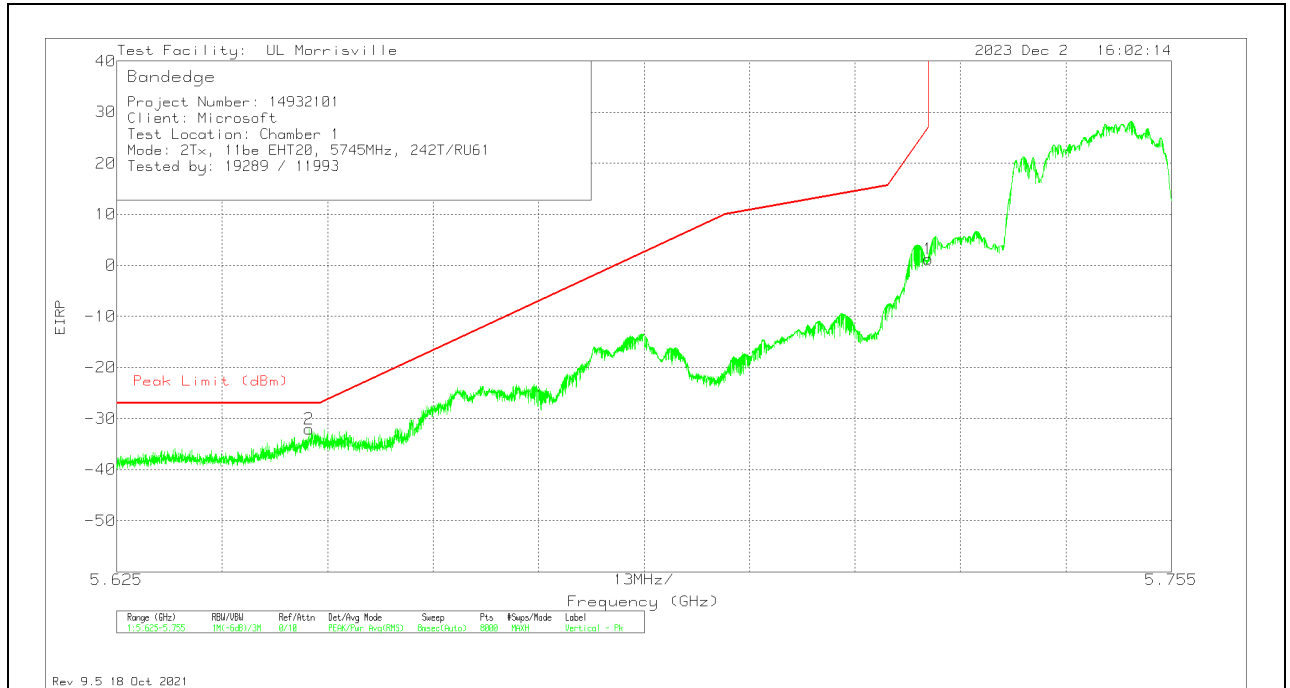

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64868	-65.22	Pk	34.4	-23	11.8	10	-32.02	-27	-5.02	357	210	V
1	5.725	-32.02	Pk	34.5	-23	11.8	10	1.28	27	-25.72	357	210	V


Pk - Peak detector

### 11.1.31. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE 5.8 GHz BAND

#### 2TX CDD MODE – 484T

#### BANDEDGE (LOW CHANNEL)


#### HORIZONTAL RESULT

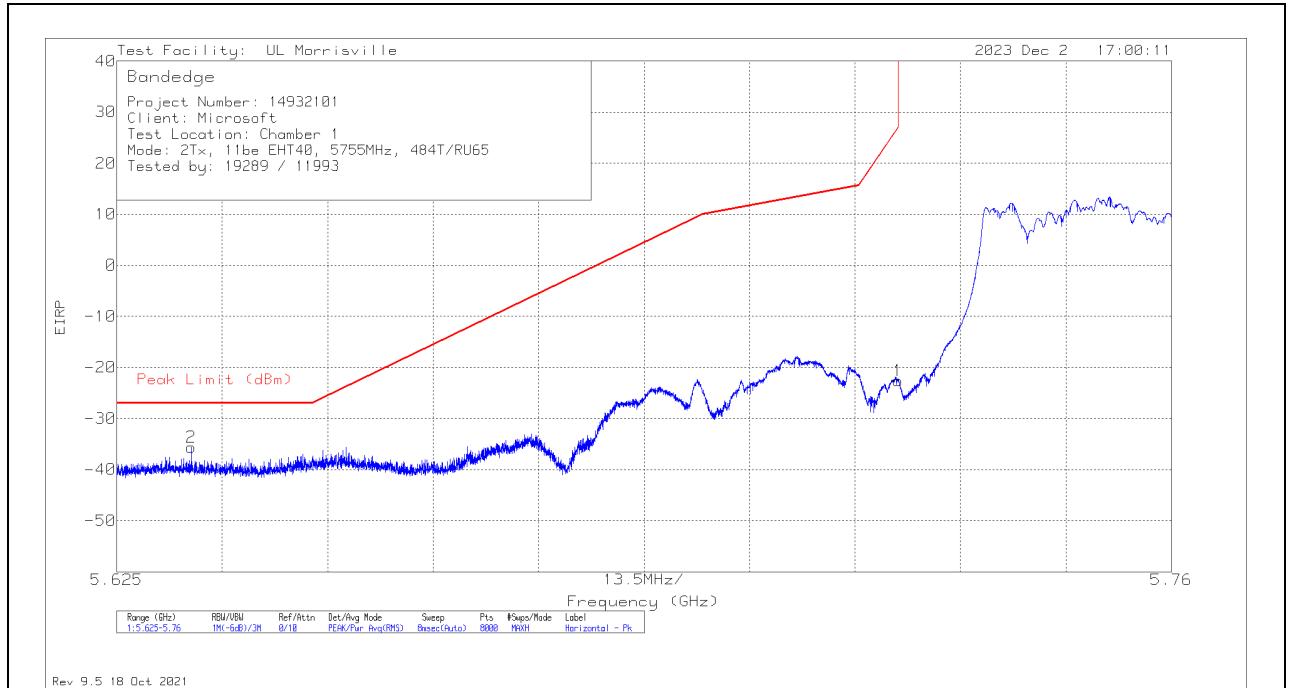

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63452	-69.03	Pk	34.4	-22.8	11.8	10	-35.63	-27	-8.63	15	386	H
1	5.725	-55.91	Pk	34.5	-23	11.8	10	-22.61	26.99	-49.6	15	386	H

Pk - Peak detector

**VERTICAL RESULT**

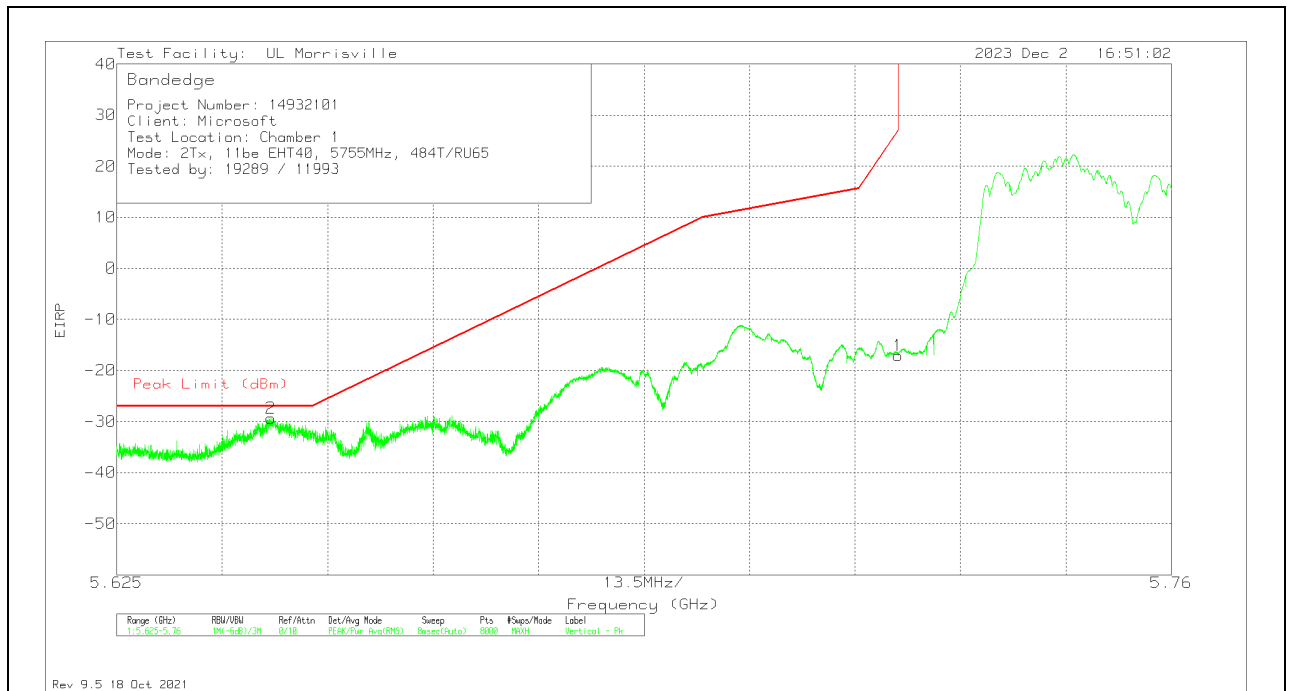

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64473	-62.52	Pk	34.4	-23	11.8	10	-29.32	-27	-2.32	351	231	V
1	5.725	-50.35	Pk	34.5	-23	11.8	10	-17.05	26.99	-44.04	351	231	V


Pk - Peak detector

**11.1.32. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE 5.8 GHz BAND**

**2TX CDD MODE – 484T+242T (CONTIGUOUS)**

**BANDEDGE (LOW EDGE)**


**HORIZONTAL RESULT**

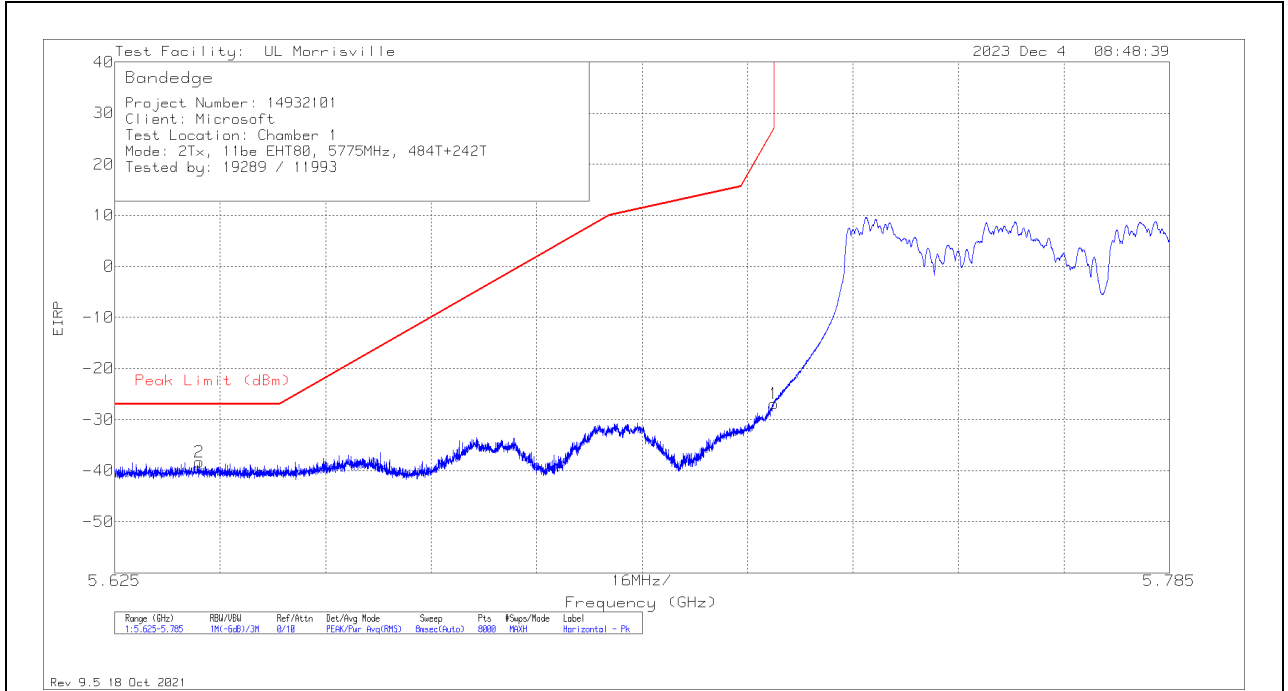

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63782	-71.7	Pk	34.4	-22.8	11.8	10	-38.3	-27	-11.3	21	281	H
1	5.725	-60.19	Pk	34.5	-23	11.8	10	-26.89	26.99	-53.88	21	281	H

Pk - Peak detector

**VERTICAL RESULT**

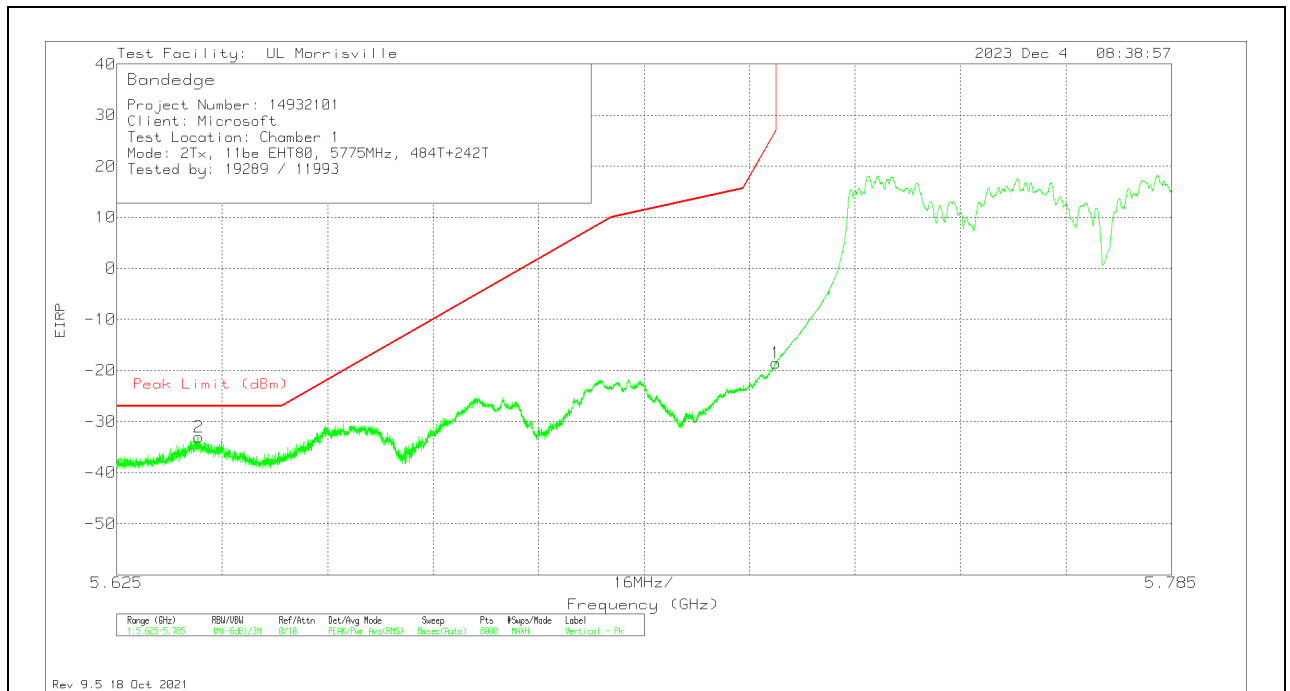


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6374	-66.46	Pk	34.4	-22.8	11.8	10	-33.06	-27	-6.06	339	236	V
1	5.725	-51.81	Pk	34.5	-23	11.8	10	-18.51	26.99	-45.5	339	236	V

Pk - Peak detector

**2TX CDD MODE – 242T+484T (NON-CONTIGUOUS)**

**BANDEDGE (LOW EDGE)**

**HORIZONTAL RESULT**

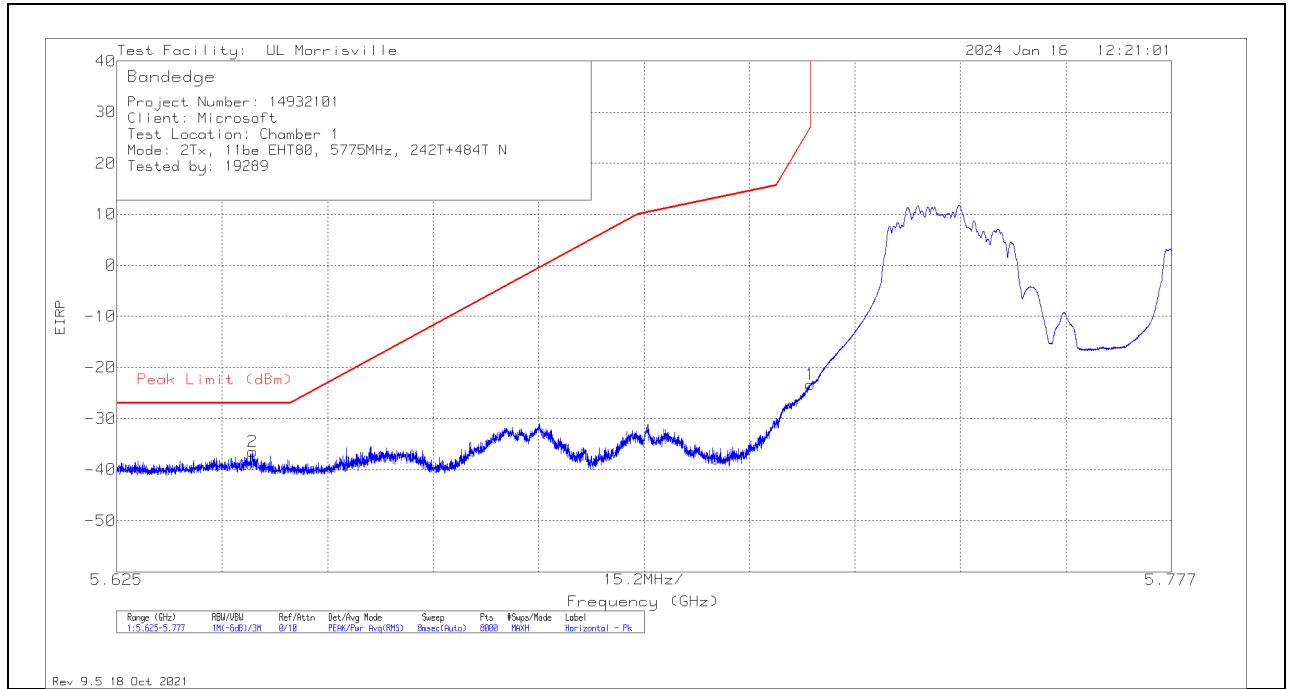


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64455	-69.69	Pk	34.4	-23	11.8	10	-36.49	-27	-9.49	24	355	H
1	5.72499	-56.6	Pk	34.5	-23	11.8	10	-23.3	26.97	-50.27	24	355	H

Pk - Peak detector



**VERTICAL RESULT**

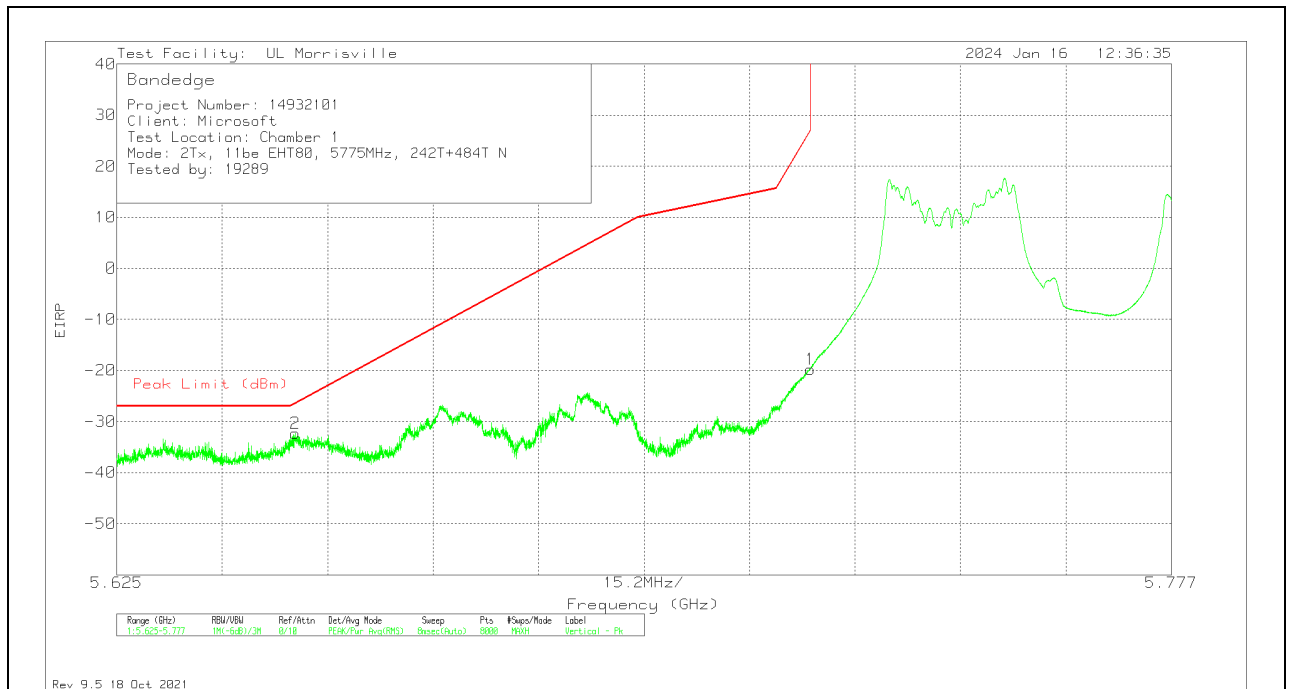


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65075	-65.49	Pk	34.4	-23	11.8	10	-32.29	-26.45	-5.84	0	251	V
1	5.72499	-53.05	Pk	34.5	-23	11.8	10	-19.75	26.97	-46.72	0	251	V

Pk - Peak detector

**2TX CDD MODE – 484T+242T (NON-CONTIGUOUS)**

**BANDEDGE (LOW EDGE)**


**HORIZONTAL RESULT**

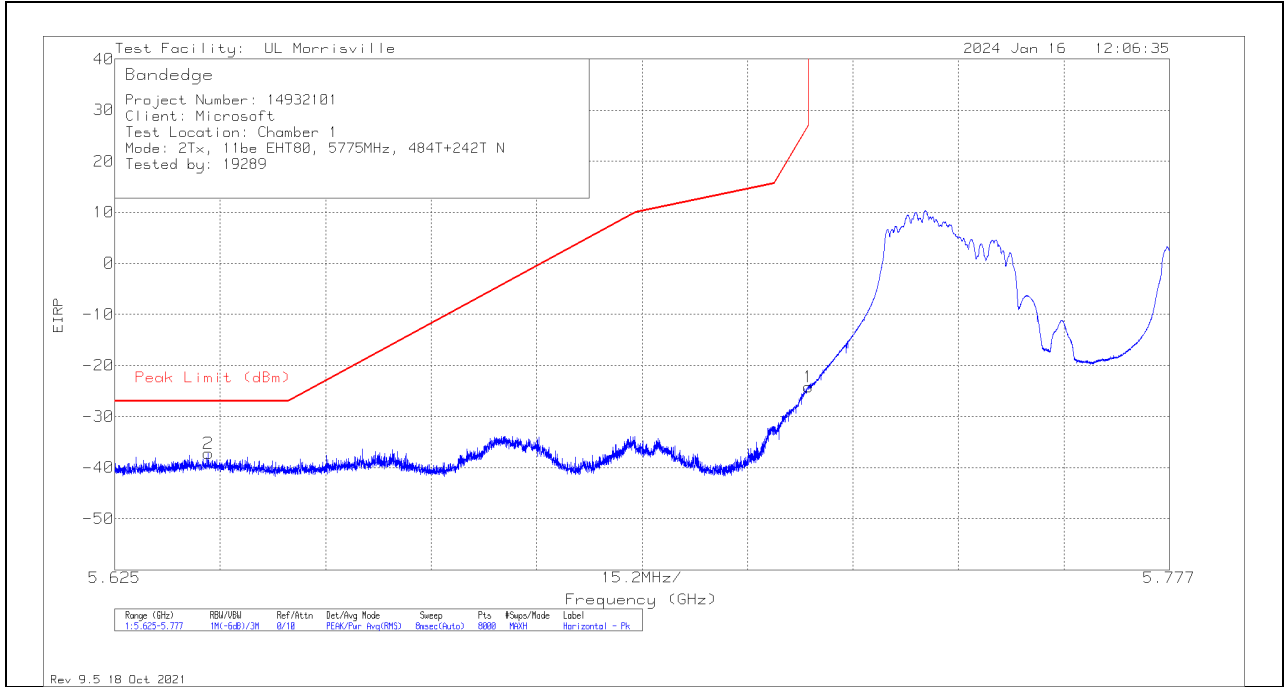

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63849	-70.52	Pk	34.4	-22.9	11.8	10	-37.22	-27	-10.22	21	303	H
1	5.72499	-57.54	Pk	34.5	-23	11.8	10	-24.24	26.97	-51.21	21	303	H

Pk - Peak detector

### VERTICAL RESULT

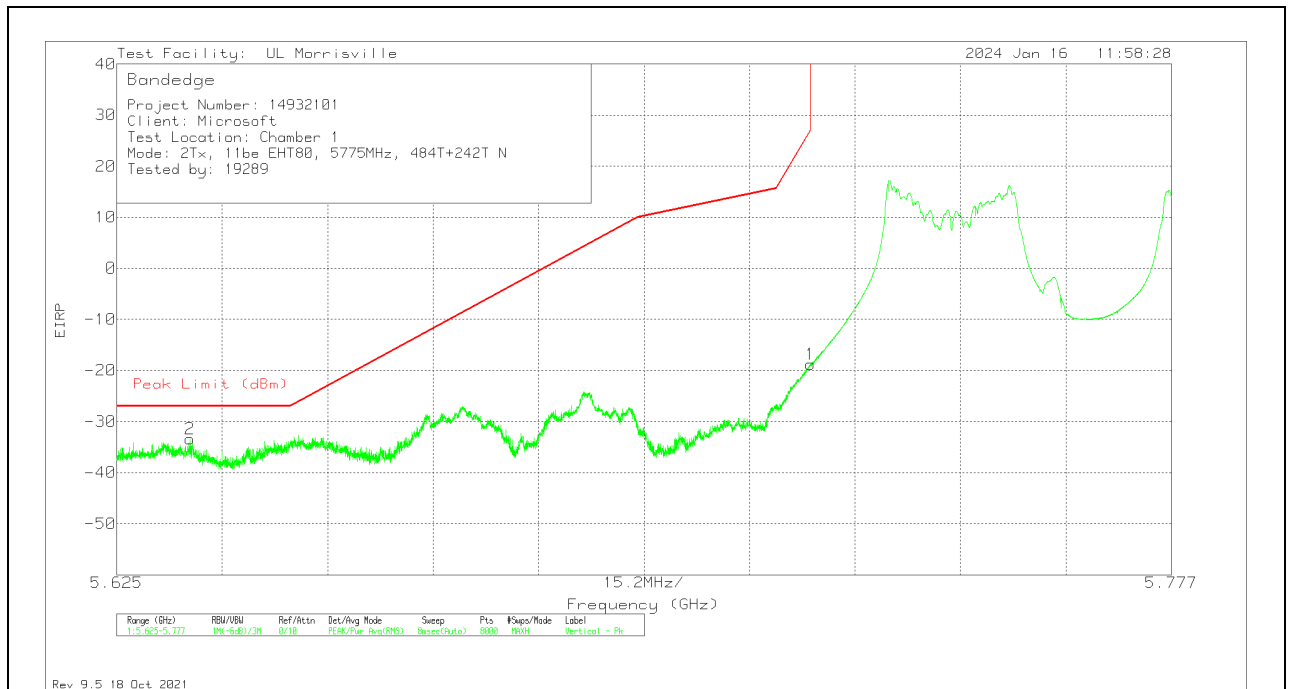


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63558	-66.85	Pk	34.4	-22.8	11.8	10	-33.45	-27	-6.45	0	261	V
1	5.72499	-52.04	Pk	34.5	-23	11.8	10	-18.74	26.97	-45.71	0	261	V

Pk - Peak detector

**2TX CDD MODE – 996T**

**BANDEDGE (LOW EDGE)**


**HORIZONTAL RESULT**

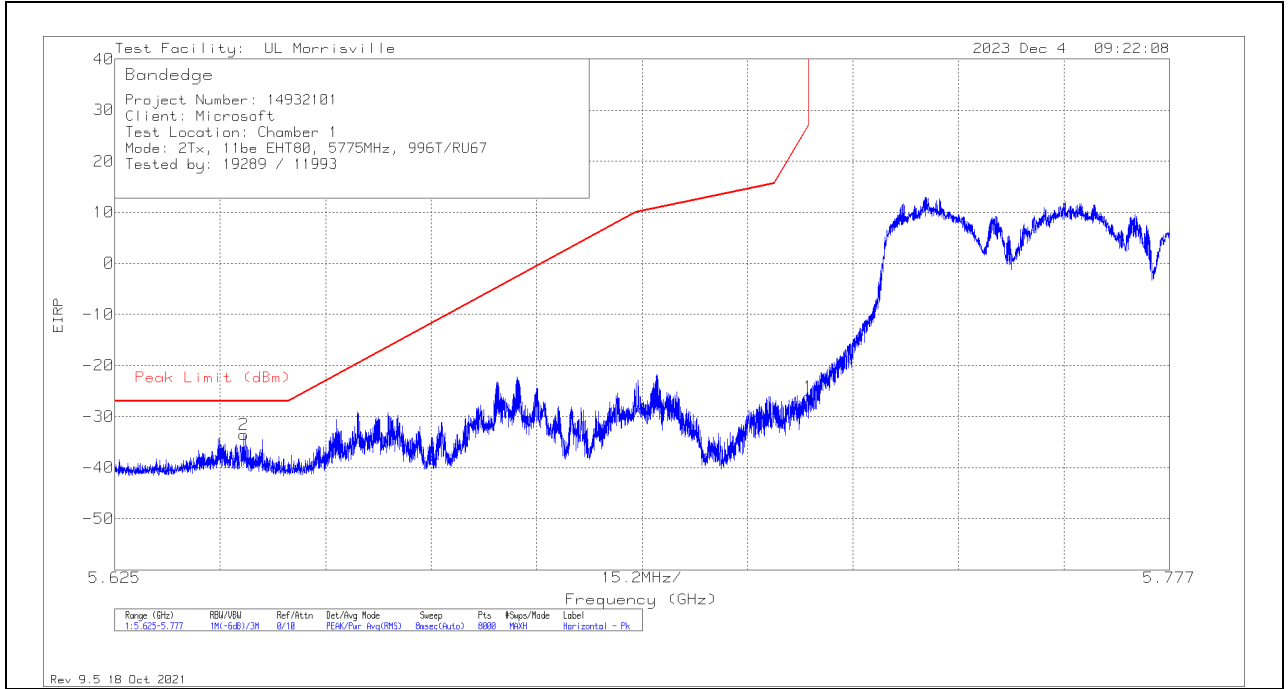

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64358	-66.69	Pk	34.4	-23	11.8	10	-33.49	-27	-6.49	17	257	H
1	5.72499	-59.43	Pk	34.5	-23	11.8	10	-26.13	26.97	-53.1	17	257	H

Pk - Peak detector

**VERTICAL RESULT**

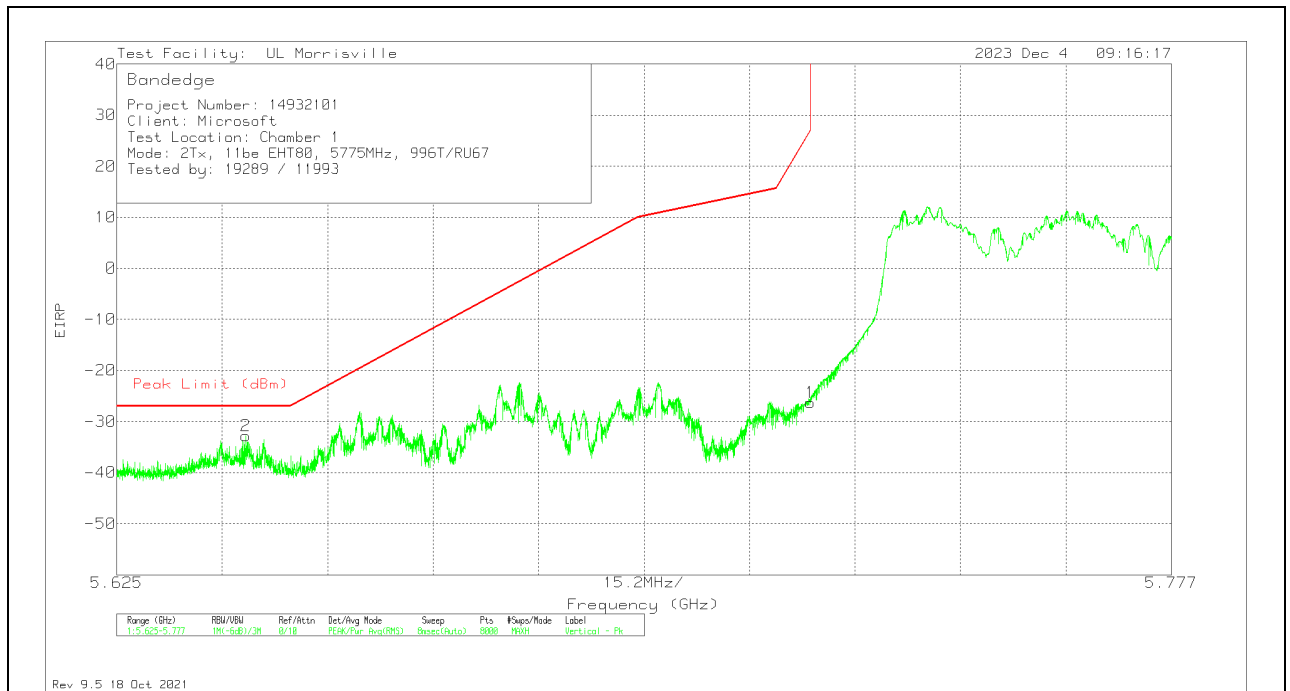

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64358	-66	Pk	34.4	-23	11.8	10	-32.8	-27	-5.8	17	257	V
1	5.72499	-59.61	Pk	34.5	-23	11.8	10	-26.31	26.97	-53.28	17	257	V


Pk - Peak detector

**11.1.33. TX ABOVE 1 GHz 802.11a MODE IN THE 5.9 GHz BAND**

**2TX CDD MODE**

**BANDEDGE (HIGH EDGE)**

**HORIZONTAL RESULT**

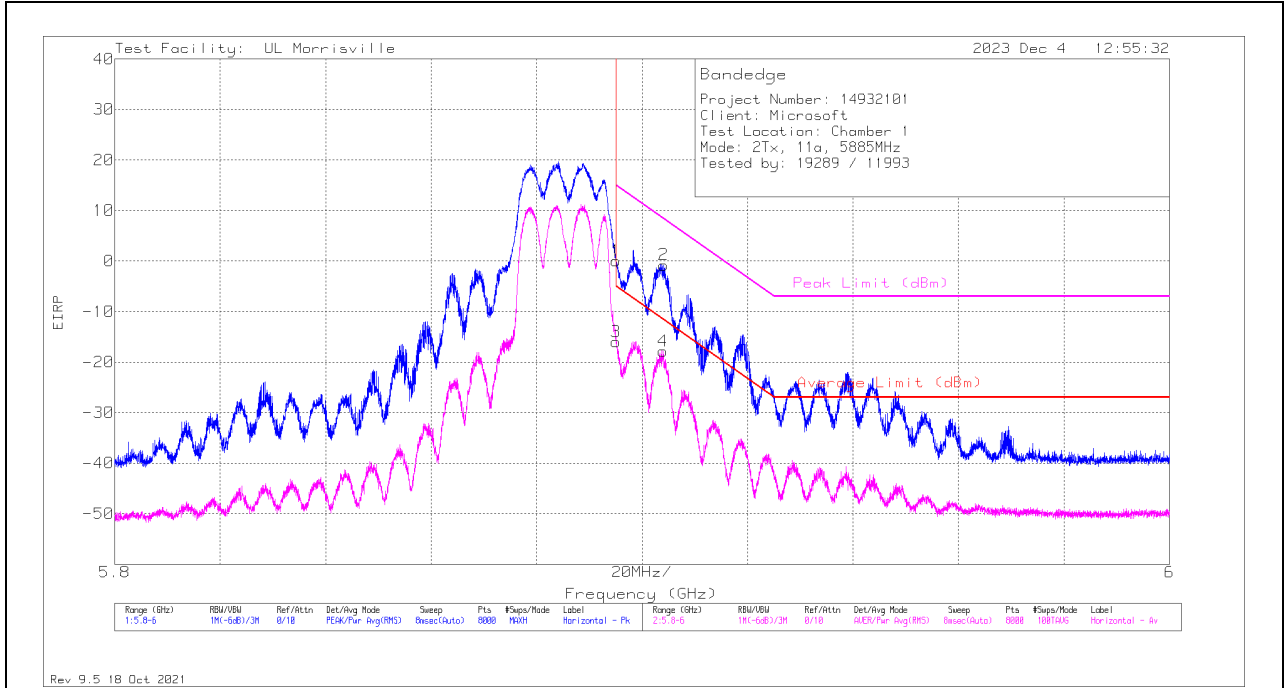


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-33.79	Pk	34.9	-22.8	11.8	10	.11	14.99	-14.88	-	-	15	323	H
3	5.89501	-49.81	RMS	34.9	-22.8	11.8	10	-15.91	-	-	-5.01	-10.9	15	323	H
4	5.90401	-52.01	RMS	34.9	-22.5	11.8	10	-17.81	-	-	-11.61	-6.2	15	323	H
2	5.90411	-35.05	Pk	35	-22.5	11.8	10	-7.75	8.32	-9.07	-	-	15	323	H

Pk - Peak detector

RMS - RMS detection

**VERTICAL RESULT**

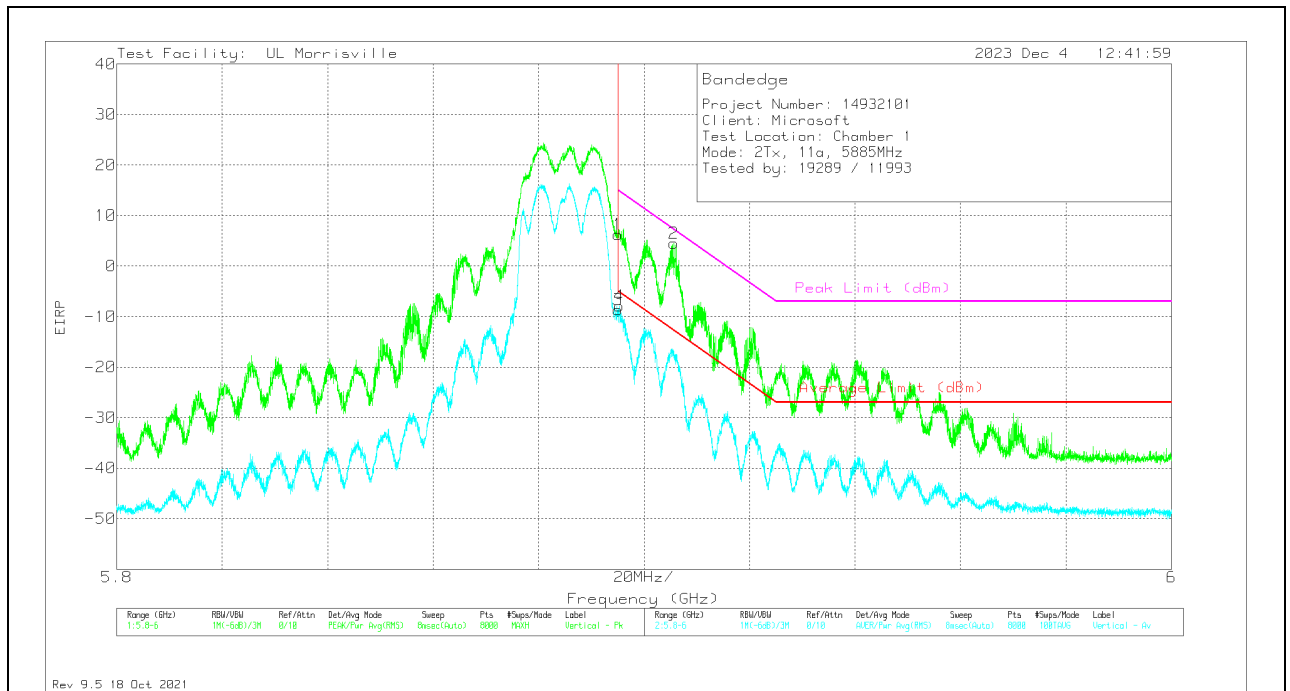


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-27.58	Pk	34.9	-22.8	11.8	10	6.32	14.99	-8.67	-	-	343	243	V
3	5.89501	-42.51	RMS	34.9	-22.8	11.8	10	-8.61	-	-	-5.01	-3.6	343	243	V
4	5.89526	-41.74	RMS	34.9	-22.8	11.8	10	-7.84	-	-	-5.19	-2.65	343	243	V
2	5.90566	-29.7	Pk	35	-22.6	11.8	10	4.5	7.18	-2.68	-	-	343	243	V


Pk - Peak detector

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

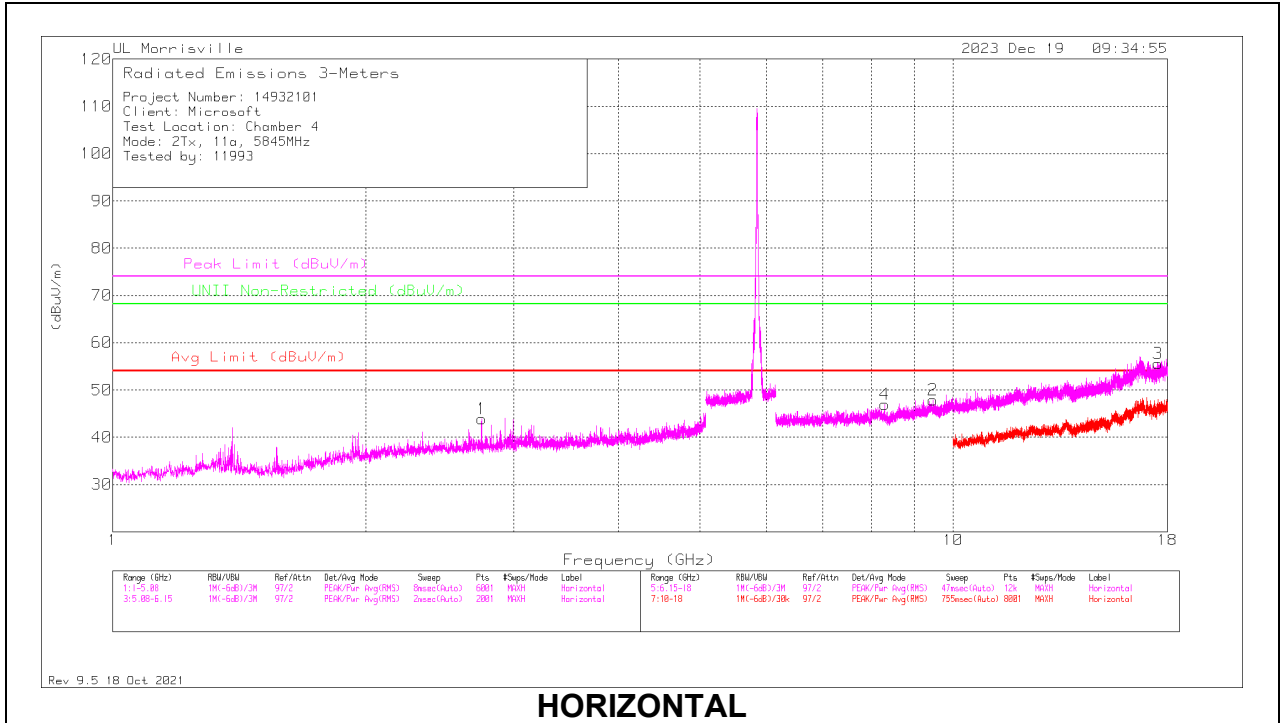

**HORIZONTAL**

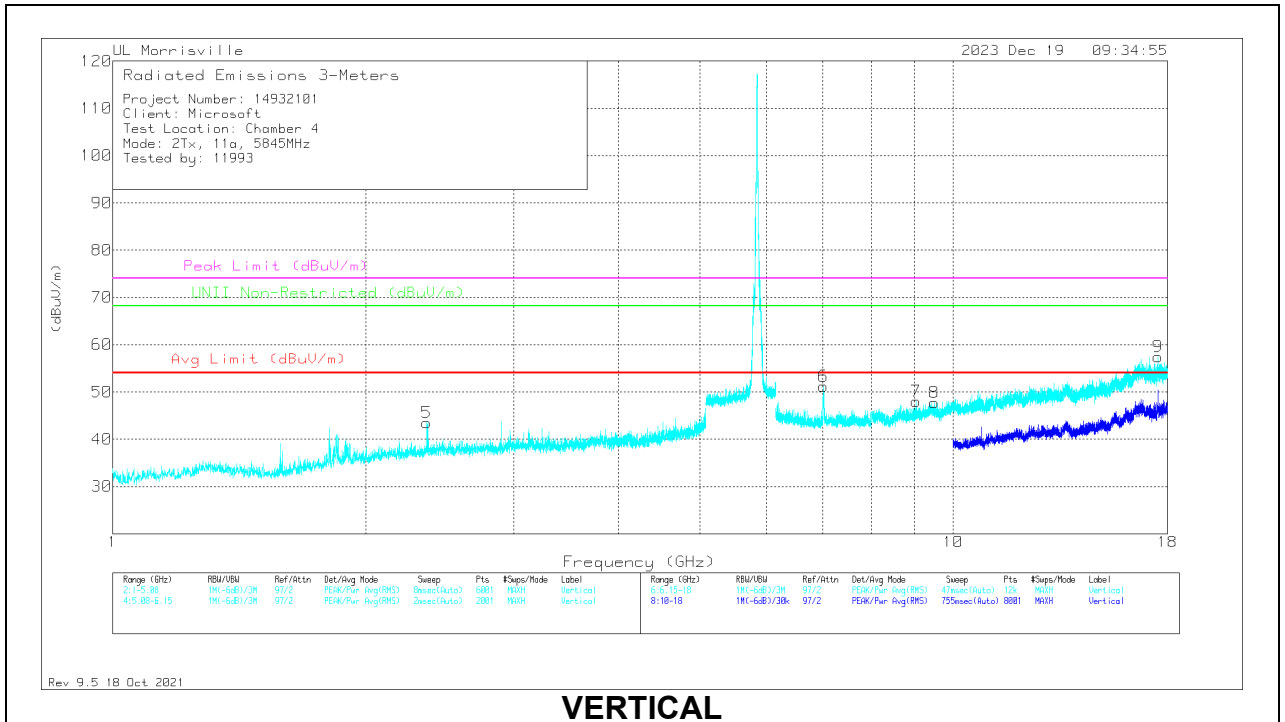

**VERTICAL**




**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.7476	47.06	Pk	32.5	-35.7	43.86	54	-10.14	74	-30.14	-	-	0-360	100	H
5	*** 2.36544	47.53	Pk	31.9	-35.9	43.53	54	-10.47	74	-30.47	-	-	0-360	200	V
2	*** 9.46701	36.2	Pk	36.7	-25	47.9	54	-6.1	74	-26.1	-	-	0-360	200	H
4	*** 8.28893	38.05	Pk	35.8	-26.9	46.95	54	-7.05	74	-27.05	-	-	0-360	200	H
7	*** 9.0384	36.56	PK-U	36.2	-25.1	47.66	-	-	74	-26.34	-	-	171	397	V
	*** 9.03904	25.15	ADR	36.2	-25.1	36.25	54	-17.75	-	-	-	-	171	397	V
8	*** 9.49368	36.7	Pk	36.7	-25.6	47.8	54	-6.2	74	-26.2	-	-	0-360	100	V
6	7.00616	43.94	Pk	35.5	-28.2	51.24	-	-	-	-	68.2	-16.96	0-360	100	V
9	17.52896	34.68	Pk	41.4	-18.6	57.48	-	-	-	-	68.2	-10.72	0-360	100	V
3	17.54773	33.5	Pk	41.4	-19.3	55.6	-	-	-	-	68.2	-12.6	0-360	200	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 PK-U - Maximum Peak  
 ADR - RMS average

### MID CHANNEL RESULTS

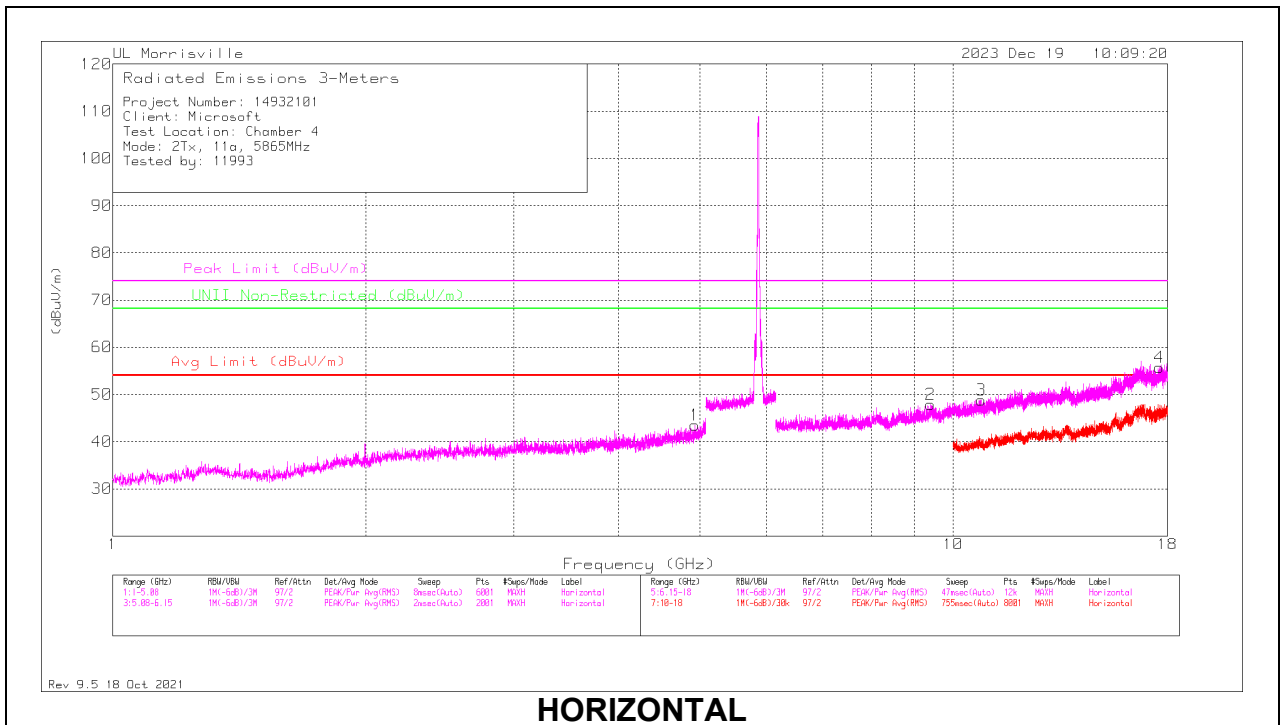

### HORIZONTAL

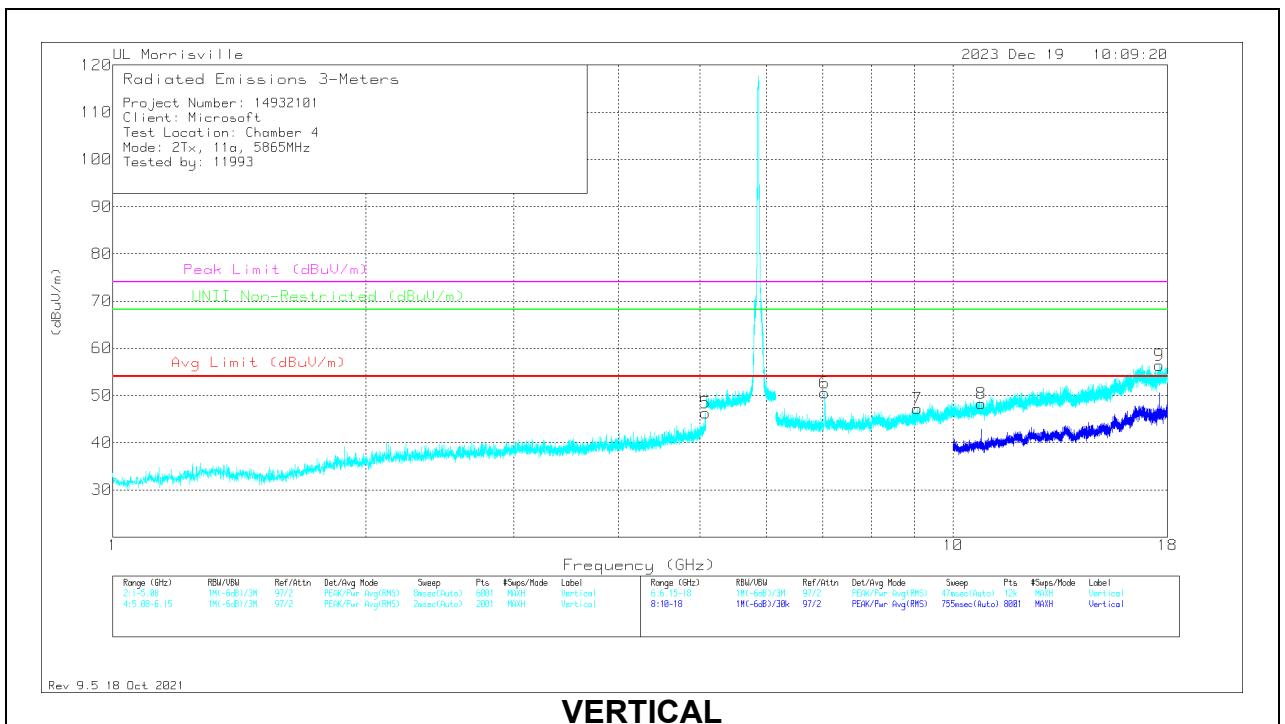


### VERTICAL

**RADIATED EMISSIONS**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.927	40.72	Pk	33.9	-31.1	43.52	54	-10.48	74	-30.48	-	-	0-360	100	H
5	*** 5.07184	41.07	Pk	34.1	-28.9	46.27	54	-7.73	74	-27.73	-	-	0-360	200	V
2	*** 9.40875	36.76	Pk	36.6	-25.5	47.86	54	-6.14	74	-26.14	-	-	0-360	100	H
3	*** 10.80066	36.81	PK-U	37.8	-25	49.61	-	-	74	-24.39	-	-	214	301	H
	*** 10.79891	25.47	ADR	37.8	-25.3	37.97	54	-16.03	-	-	-	-	214	301	H
7	*** 9.06905	36.33	Pk	36.2	-25.3	47.23	54	-6.77	74	-26.77	-	-	0-360	200	V
8	*** 10.79704	36.53	PK-U	37.8	-25.6	48.73	-	-	74	-25.27	-	-	141	113	V
	*** 10.79972	25.56	ADR	37.8	-25.1	38.26	54	-15.74	-	-	-	-	141	113	V
6	7.03776	42.59	Pk	35.6	-27.7	50.49	-	-	-	-	68.2	-17.71	0-360	200	V
9	17.59414	34.63	Pk	41.4	-19.6	56.43	-	-	-	-	68.2	-11.77	0-360	200	V
4	17.60006	33.96	Pk	41.4	-19.6	55.76	-	-	-	-	68.2	-12.44	0-360	100	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 \*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band  
 Pk - Peak detector  
 PK-U - Maximum Peak  
 ADR - RMS average

### HIGH CHANNEL RESULTS

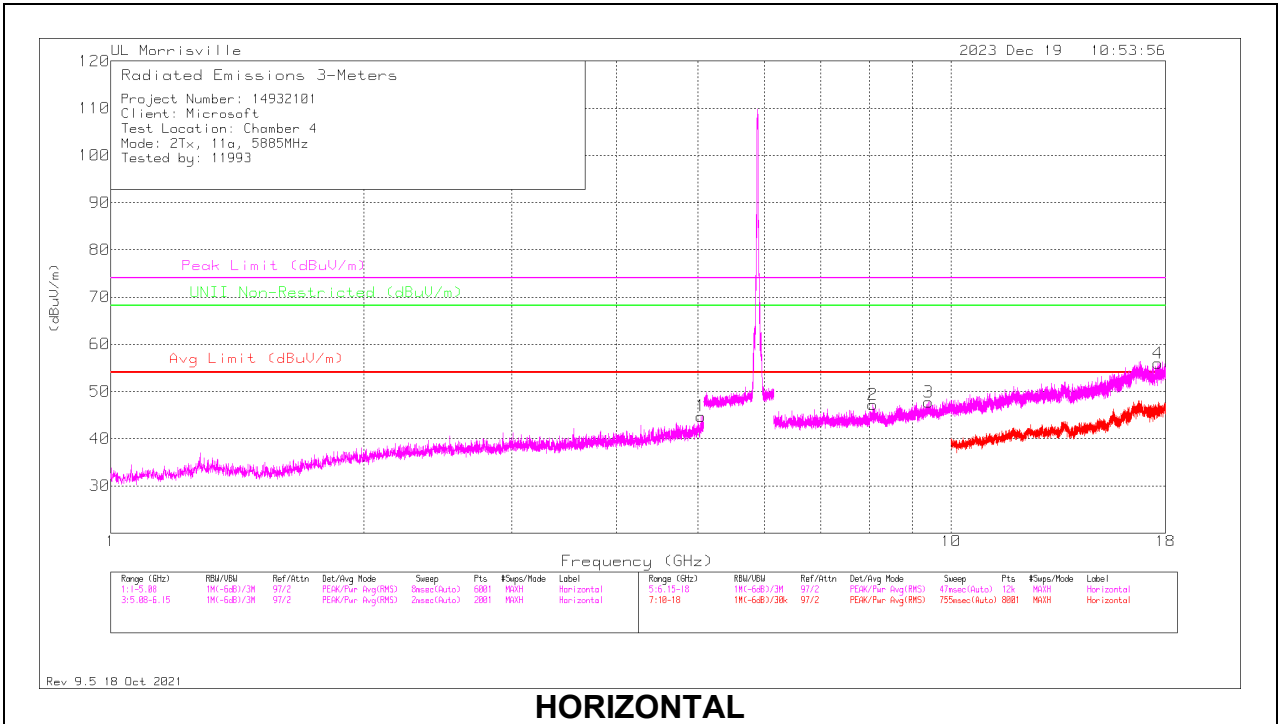

HORIZONTAL

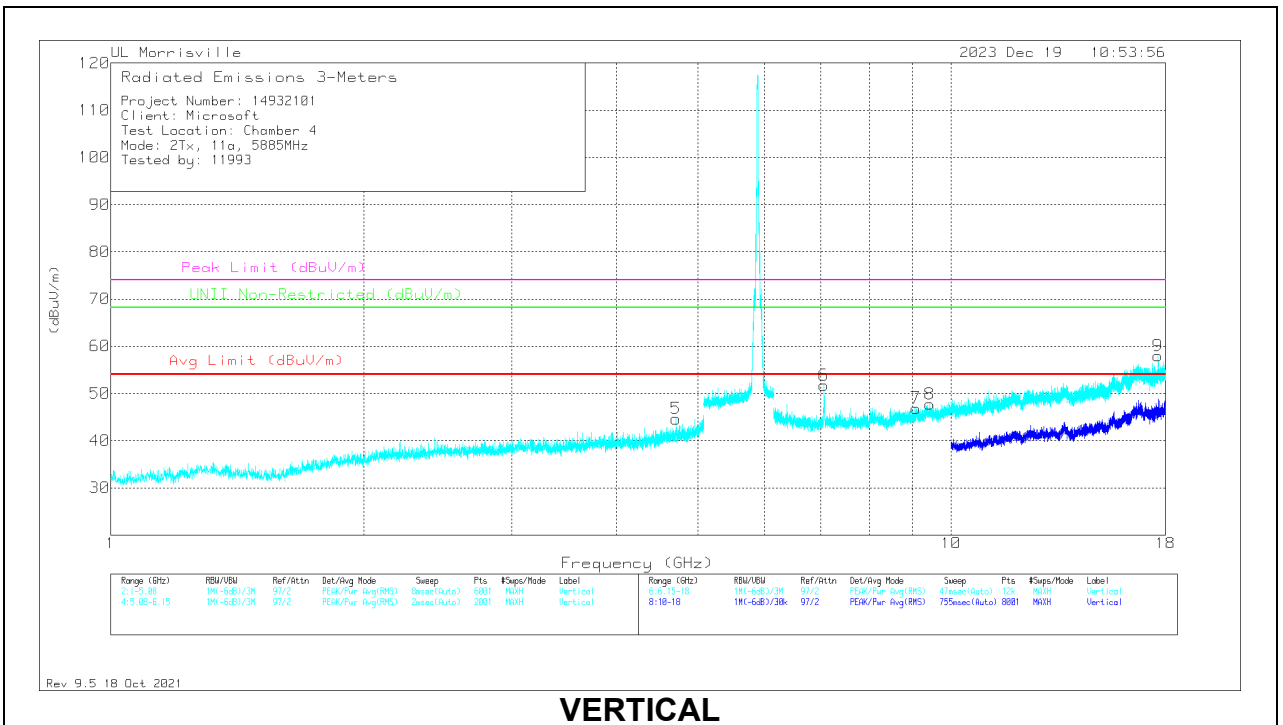

VERTICAL

**RADIATED EMISSIONS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.0426	40.36	Pk	34.1	-29.7	44.76	54	-9.24	74	-29.24	-	-	0-360	100	H
5	*** 4.70804	42.03	Pk	34.1	-31.5	44.63	54	-9.37	74	-29.37	-	-	0-360	200	V
2	*** 8.06773	38.77	Pk	35.8	-27.4	47.17	54	-6.83	74	-26.83	-	-	0-360	100	H
3	*** 9.40283	36.58	Pk	36.6	-25.4	47.78	54	-6.22	74	-26.22	-	-	0-360	100	H
7	*** 9.08584	36.18	Pk	36.3	-25.6	46.88	54	-7.12	74	-27.12	-	-	0-360	200	V
8	*** 9.44134	36.12	Pk	36.7	-25.1	47.72	54	-6.28	74	-26.28	-	-	0-360	200	V
6	7.06146	43.92	Pk	35.6	-27.8	51.72	-	-	-	-	68.2	-16.48	0-360	200	V
4	17.63265	33.44	Pk	41.3	-18.7	56.04	-	-	-	-	68.2	-12.16	0-360	100	H
9	17.64351	35.48	Pk	41.3	-18.8	57.98	-	-	-	-	68.2	-10.22	0-360	200	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK-U - Maximum Peak


ADR - RMS average

### 11.1.34. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.9 GHz BAND

#### 2TX CDD MODE

#### BANDEDGE (HIGH EDGE)


#### HORIZONTAL RESULT

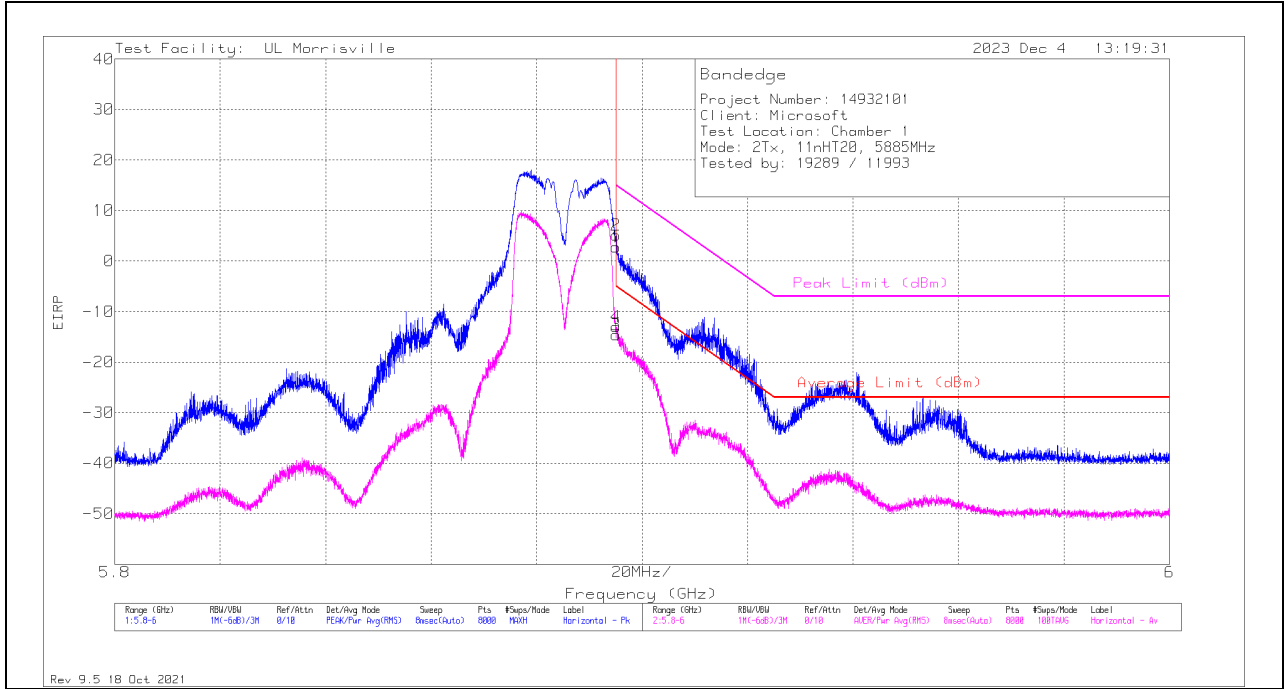

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-31.1	Pk	34.9	-22.8	11.8	10	2.8	14.99	-12.19	-	-	18	299	H
3	5.89501	-48.49	RMS	34.9	-22.8	11.8	10	-14.59	-	-	-5.01	-9.58	18	299	H
2	5.89511	-28.78	Pk	34.9	-22.8	11.8	10	5.12	14.92	-9.8	-	-	18	299	H
4	5.89511	-46.89	RMS	34.9	-22.8	11.8	10	-12.99	-	-	-5.08	-7.91	18	299	H

Pk - Peak detector

### VERTICAL RESULT

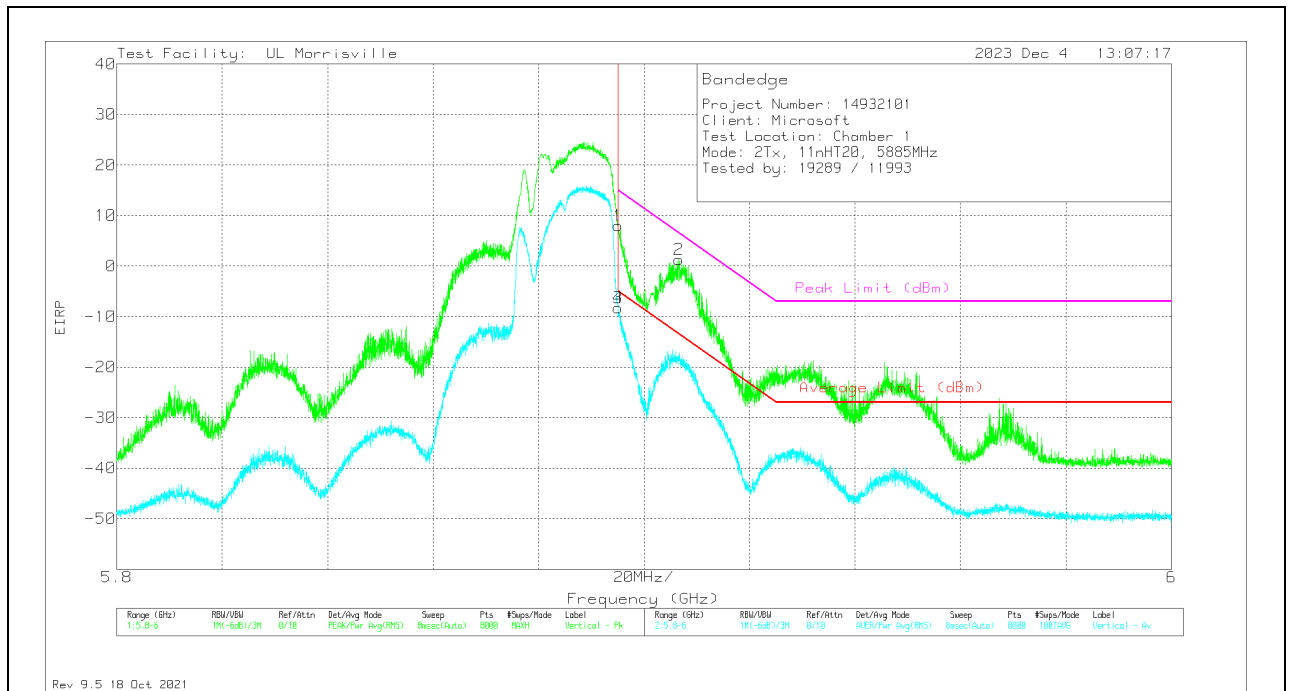

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-25.9	Pk	34.9	-22.8	11.8	10	8	14.99	-6.99	-	-	359	296	V
3	5.89501	-42.21	RMS	34.9	-22.8	11.8	10	-8.31	-	-	-5.01	-3.3	359	296	V
4	5.89506	-42.13	RMS	34.9	-22.8	11.8	10	-8.23	-	-	-5.05	-3.18	359	296	V
2	5.90664	-32.93	Pk	35	-22.6	11.8	10	1.27	6.47	-5.2	-	-	359	296	V


Pk - Peak detector

**11.1.35. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.9 GHz BAND**

**2TX CDD MODE**

**BANDEDGE (HIGH EDGE)**

**HORIZONTAL RESULT**

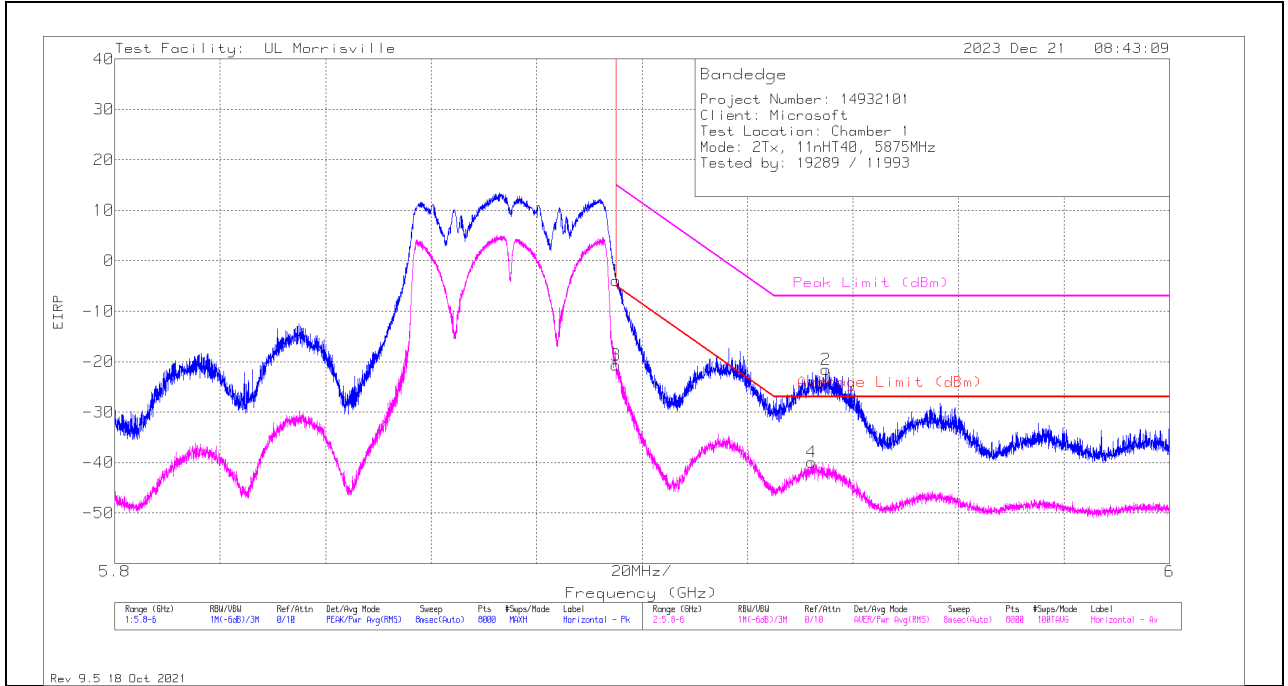


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-37.84	Pk	34.9	-22.8	11.8	10	-3.94	14.99	-18.93	-	-	7	312	H
3	5.89501	-54.62	RMS	34.9	-22.8	11.8	10	-20.72	-	-	-5.01	-15.71	7	312	H
4	5.93219	-74.11	RMS	35.1	-22.7	11.8	10	-39.91	-	-	-27	-12.91	7	312	H
2	5.93482	-55.8	Pk	35.1	-22.7	11.8	10	-21.6	-7	-14.6	-	-	7	312	H

Pk - Peak detector  
 RMS - RMS detection



**VERTICAL RESULT**

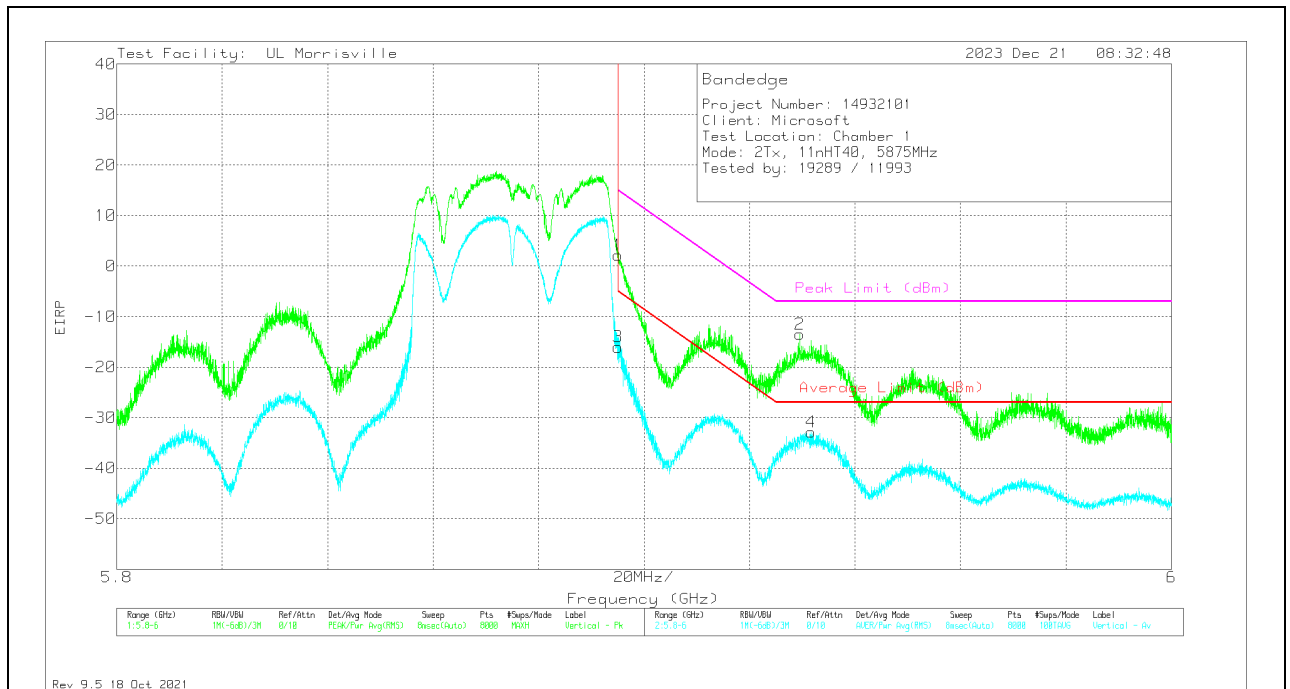

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-31.74	Pk	34.9	-22.8	11.8	10	2.16	14.99	-12.83	-	-	2	127	V
3	5.89501	-49.92	RMS	34.9	-22.8	11.8	10	-16.02	-	-	-5.01	-11.01	2	127	V
2	5.92952	-47.69	Pk	35.1	-22.7	11.8	10	-13.49	-7	-6.49	-	-	2	127	V
4	5.93172	-67.04	RMS	35.1	-22.7	11.8	10	-32.84	-	-	-27	-5.84	2	127	V


Pk - Peak detector  
 RMS - RMS detection

### 11.1.36. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.9 GHz BAND

#### 2TX CDD MODE

#### BANDEDGE (HIGH EDGE)


#### HORIZONTAL RESULT

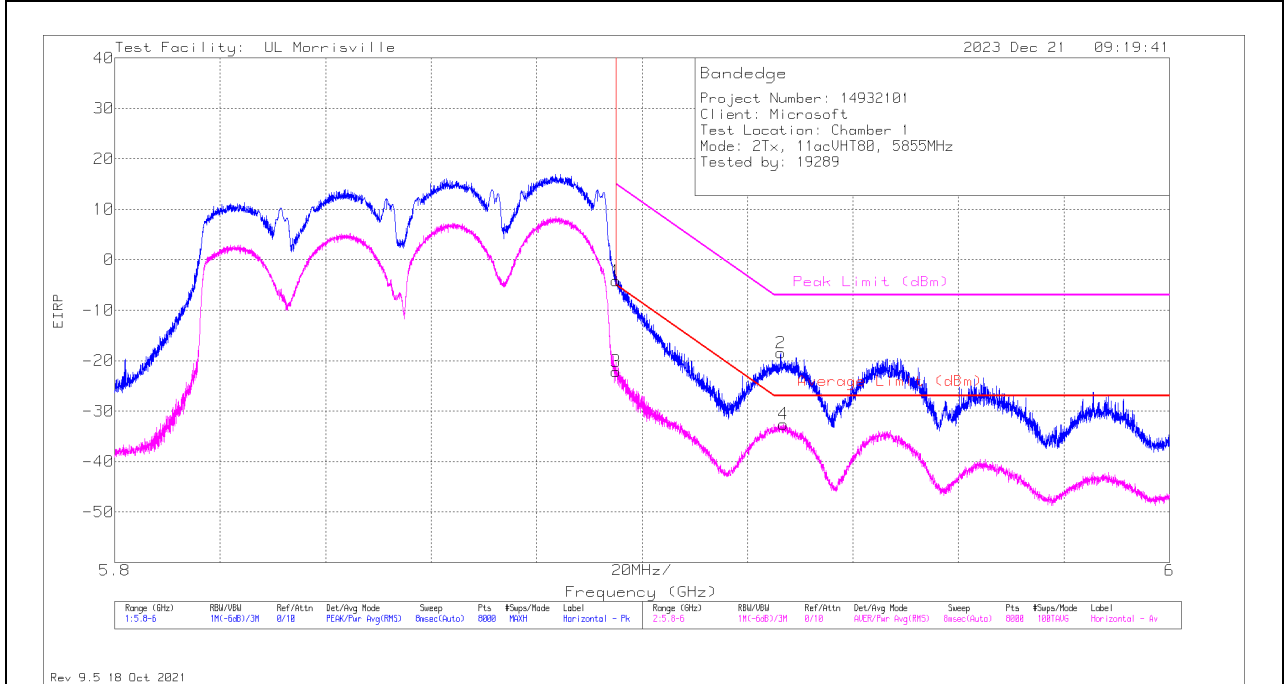

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-38.06	Pk	34.9	-22.8	11.8	10	0	-4.16	14.99	-19.15	-	-	31	385	H
3	5.89501	-56.12	RMS	34.9	-22.8	11.8	10	.11	-22.11	-	-	-5.01	-17.1	31	385	H
2	5.92634	-52.67	Pk	35	-22.6	11.8	10	0	-18.47	-7	-11.47	-	-	31	385	H
4	5.92682	-66.85	RMS	35	-22.6	11.8	10	.11	-32.54	-	-	-27	-5.54	31	385	H

Pk - Peak detector  
 RMS - RMS detection

**VERTICAL RESULT**

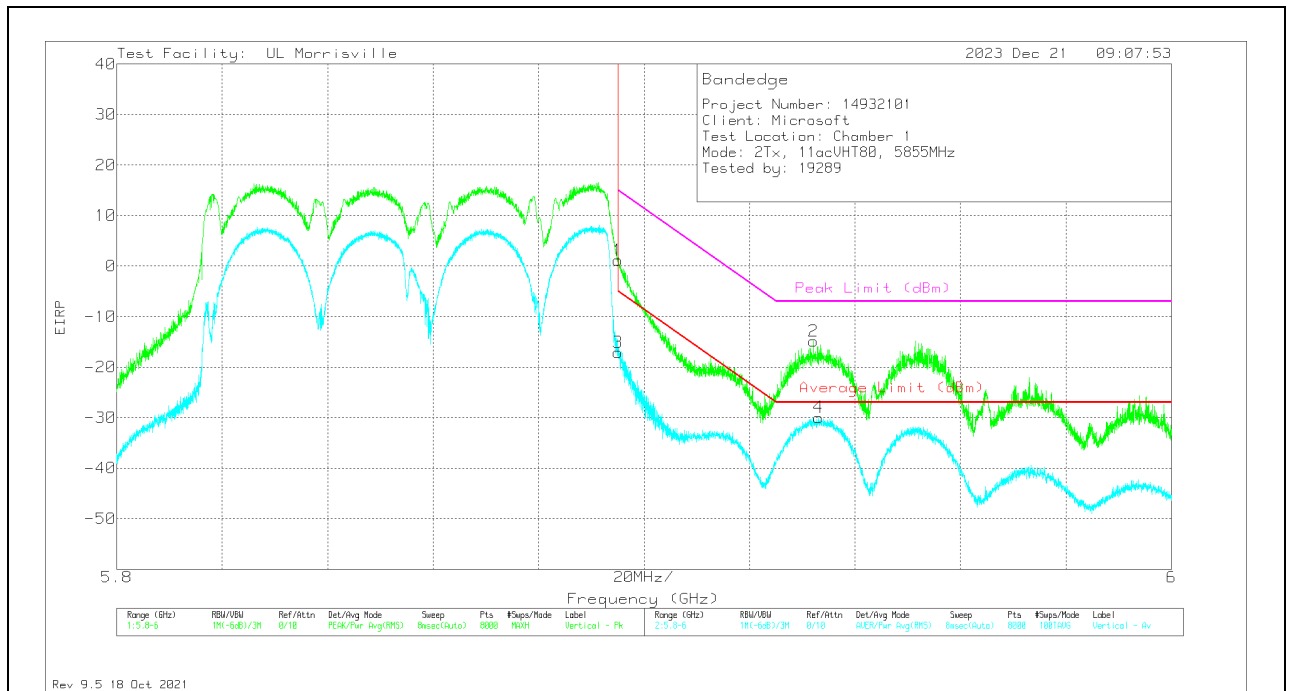

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Average Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.89501	-32.72	Pk	34.9	-22.8	11.8	10	0	1.18	14.99	-13.81	-	-	348	240	V
3	5.89501	-51.05	RMS	34.9	-22.8	11.8	10	.11	-17.04	-	-	-5.01	-12.03	348	240	V
2	5.93214	-49	Pk	35.1	-22.7	11.8	10	0	-14.8	-7	-7.8	-	-	348	240	V
4	5.93312	-64.24	RMS	35.1	-22.7	11.8	10	.11	-29.93	-	-	-27	-2.93	348	240	V


Pk - Peak detector  
 RMS - RMS detection

### 11.1.37. TX ABOVE 1 GHz 802.11ac VHT160 MODE IN THE 5.8/5.9 GHz BAND

#### 2TX CDD MODE

#### BANDEDGE (LOW EDGE)

#### HORIZONTAL RESULT

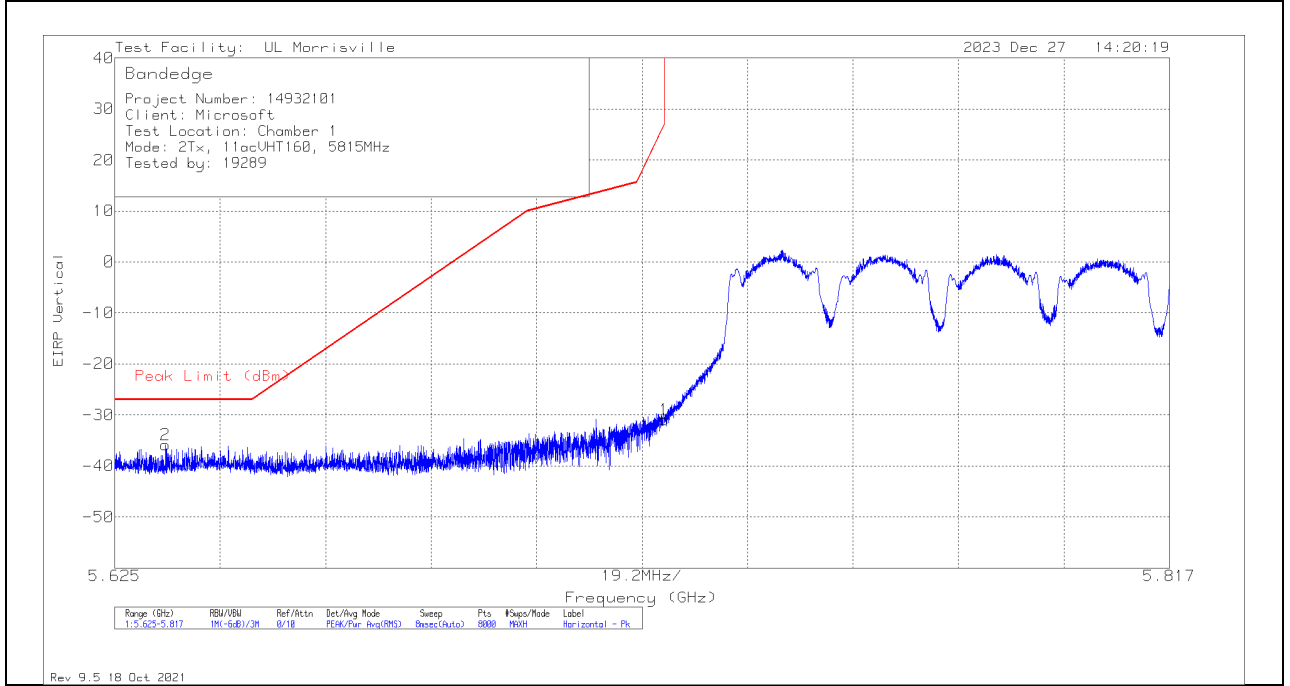

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63422	-69.23	Pk	34.4	-22.8	11.8	10	-35.83	-27	-8.83	16	295	H
1	5.725	-64.22	Pk	34.5	-23	11.8	10	-30.92	26.99	-57.91	16	295	H

Pk - Peak detector