


VERTICAL RESULT

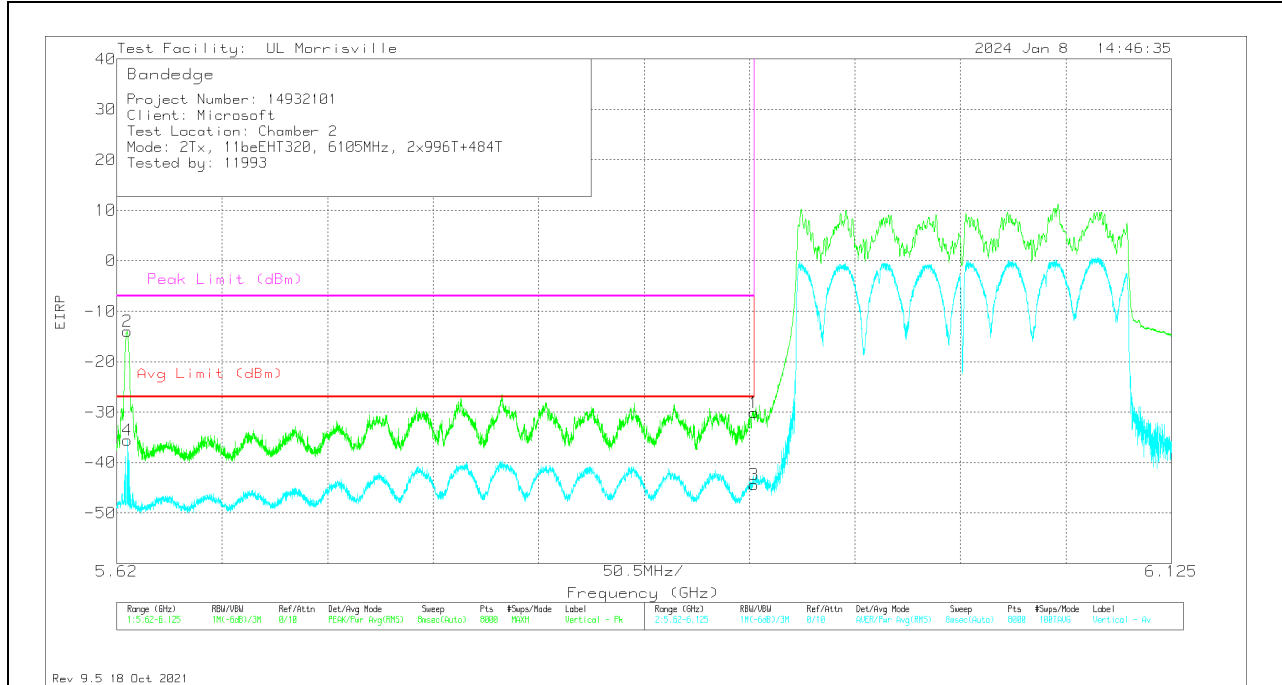


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62492	-47.4	Pk	34.6	-23	11.8	10	0	-14	-	-	-7	-7	70	211	V
4	5.62499	-69.16	RMS	34.6	-23	11.8	10	.14	-35.62	-27	-8.62	-	-	70	211	V
1	5.925	-64.45	Pk	35	-22.6	11.8	10.1	0	-30.15	-	-	-7	-23.15	70	211	V
3	5.925	-78.86	RMS	35	-22.6	11.8	10.1	.14	-44.42	-27	-17.42	-	-	70	211	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

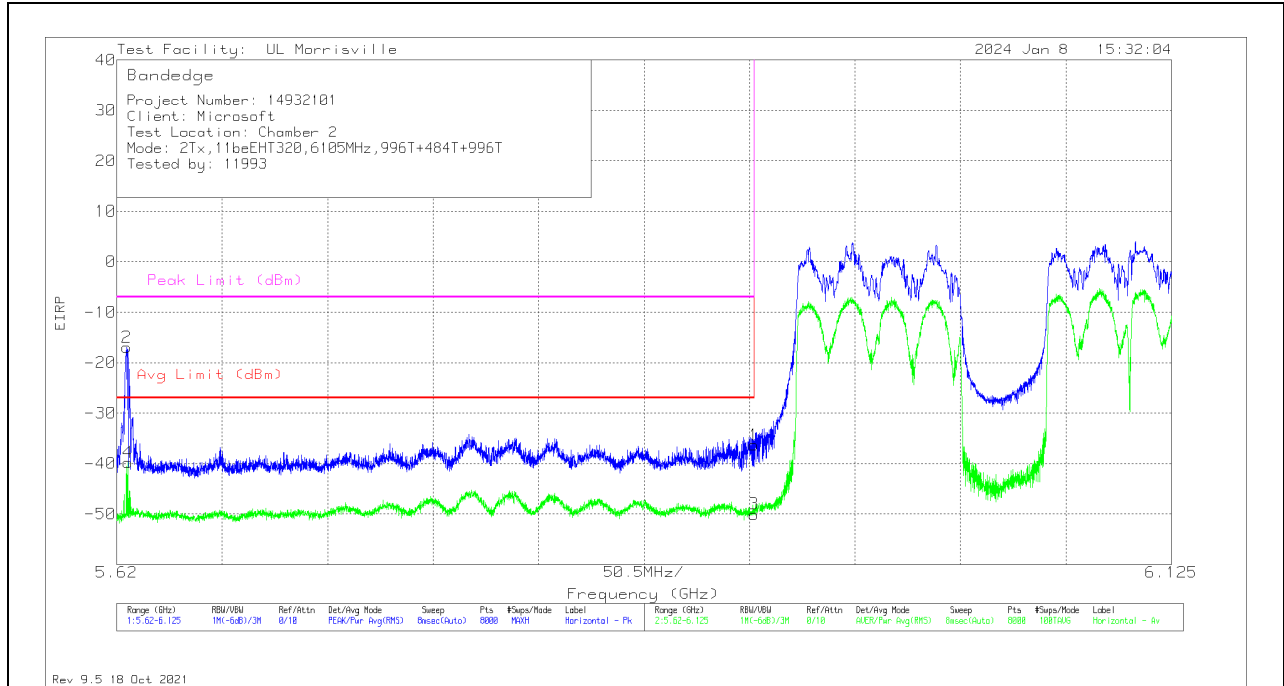

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6248	-50.34	Pk	34.6	-23	11.8	10	0	-16.94	-	-	-7	-9.94	93	252	H
4	5.62537	-73.34	RMS	34.6	-23	11.8	10	.14	-39.8	-27	-12.8	-	-	93	252	H
1	5.925	-70.62	Pk	35	-22.6	11.8	10.1	0	-36.32	-	-	-7	-29.32	93	252	H
3	5.925	-84.48	RMS	35	-22.6	11.8	10.1	.14	-50.04	-27	-23.04	-	-	93	252	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

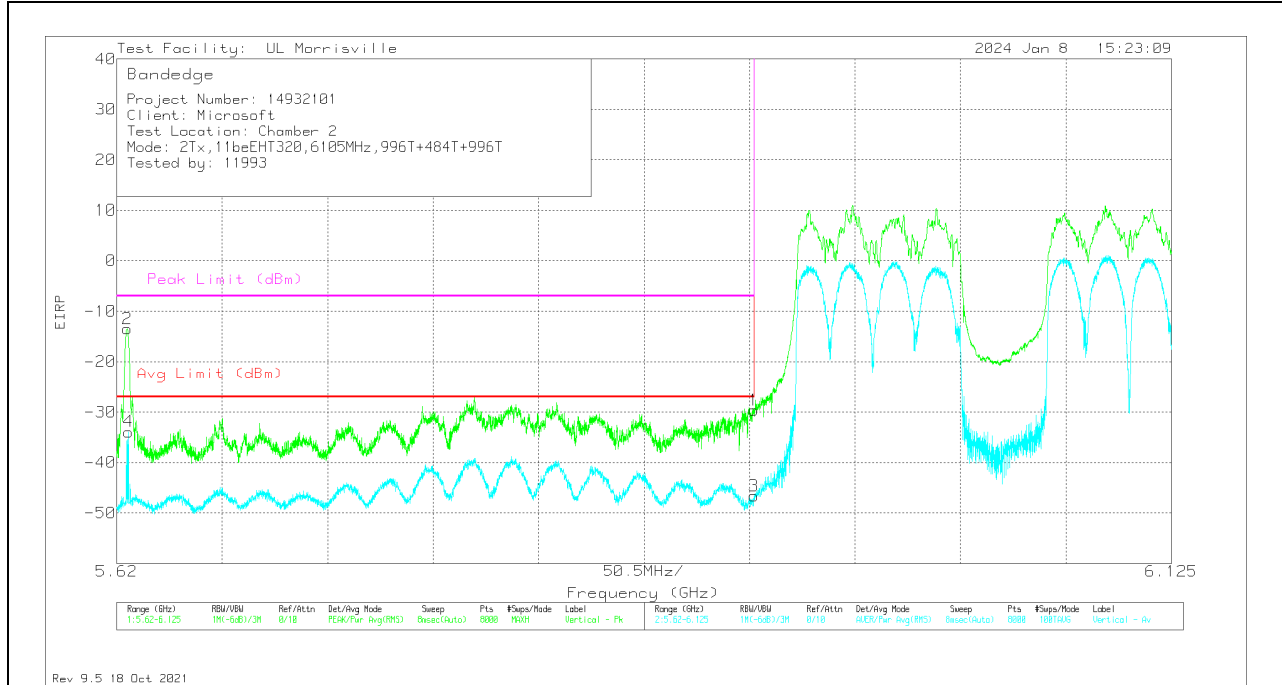


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62492	-46.88	Pk	34.6	-23	11.8	10	0	-13.48	-	-	-7	-6.48	65	217	V
4	5.62556	-67.44	RMS	34.6	-23	11.8	10	.14	-33.9	-27	-6.9	-	-	65	217	V
1	5.925	-63.95	Pk	35	-22.6	11.8	10.1	0	-29.65	-	-	-7	-22.65	65	217	V
3	5.925	-81.06	RMS	35	-22.6	11.8	10.1	.14	-46.62	-27	-19.62	-	-	65	217	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

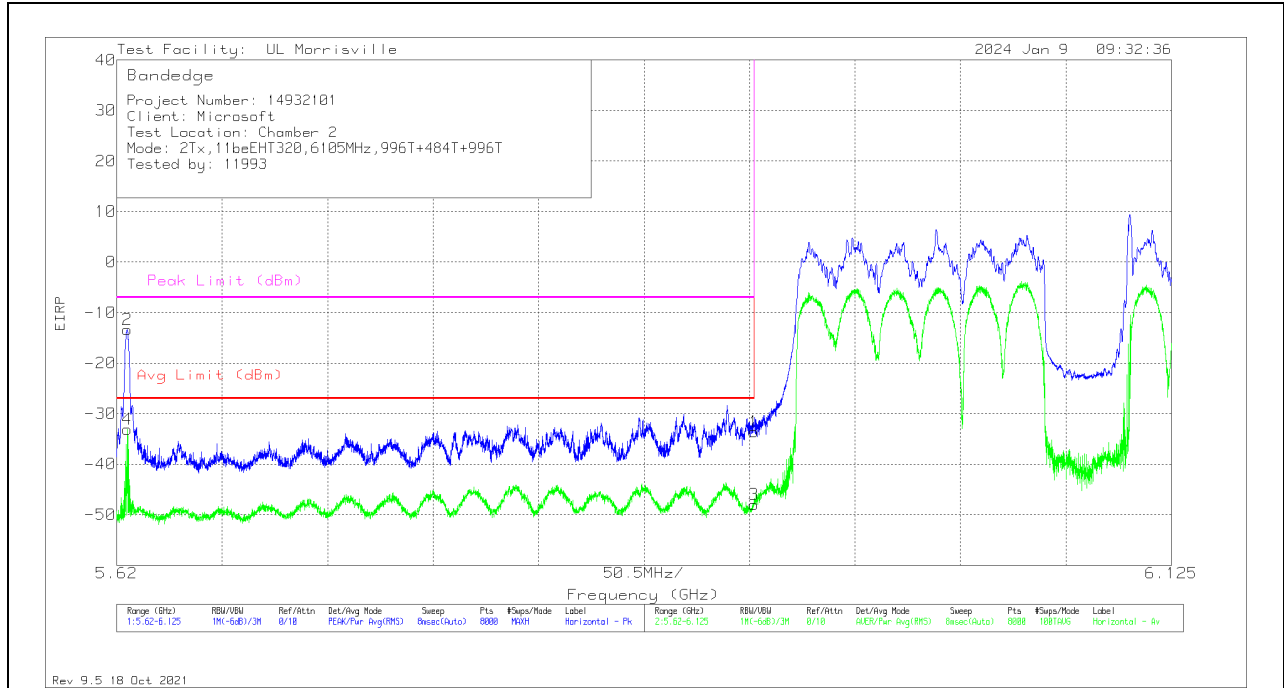

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62492	-66.6	RMS	34.6	-23	11.8	10	.14	-33.06	-27	-6.06	-	-	87	268	H
2	5.62499	-46.79	Pk	34.6	-23	11.8	10	0	-13.39	-	-	-7	-6.39	87	268	H
1	5.925	-67.9	Pk	35	-22.6	11.8	10.1	0	-33.6	-	-	-7	-26.6	87	268	H
3	5.925	-82.4	RMS	35	-22.6	11.8	10.1	.14	-47.96	-27	-20.96	-	-	87	268	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

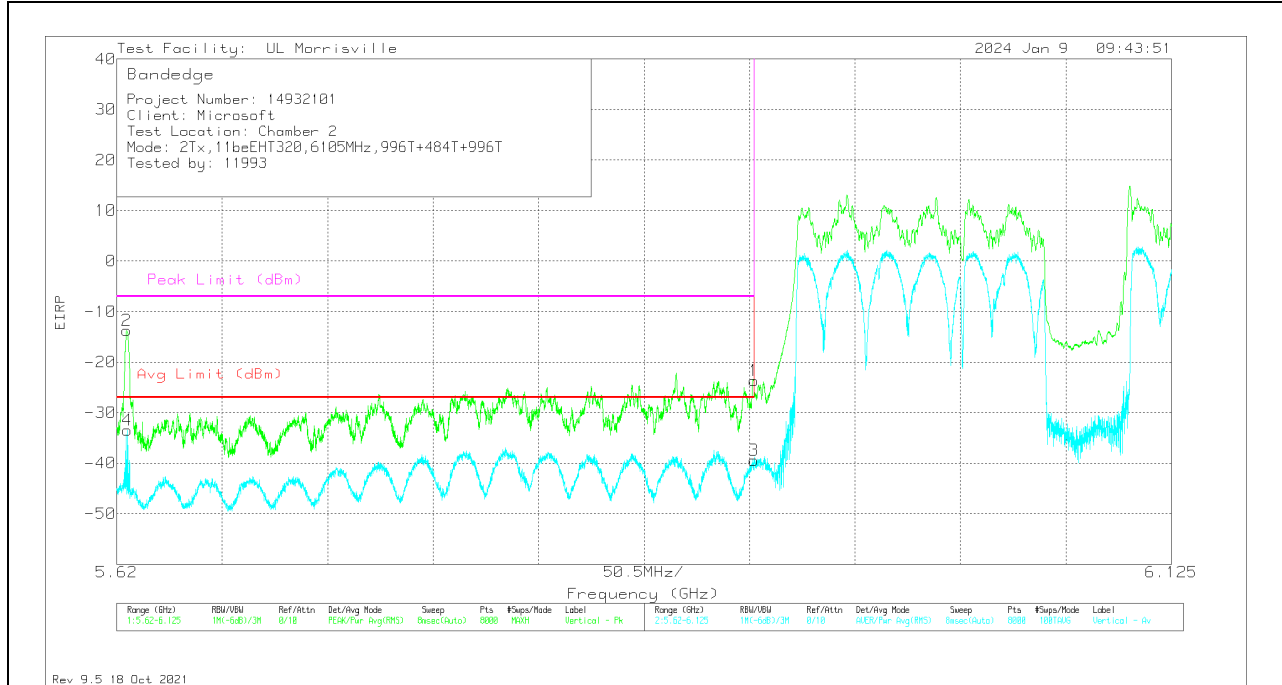


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6248	-47.14	Pk	34.6	-23	11.8	10	0	-13.74	-	-	-7	-6.74	66	208	V
4	5.62499	-67.05	RMS	34.6	-23	11.8	10	.14	-33.51	-27	-6.51	-	-	66	208	V
1	5.925	-57.98	Pk	35	-22.6	11.8	10.1	0	-23.68	-	-	-7	-16.68	66	208	V
3	5.925	-73.87	RMS	35	-22.6	11.8	10.1	.14	-39.43	-27	-12.43	-	-	66	208	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

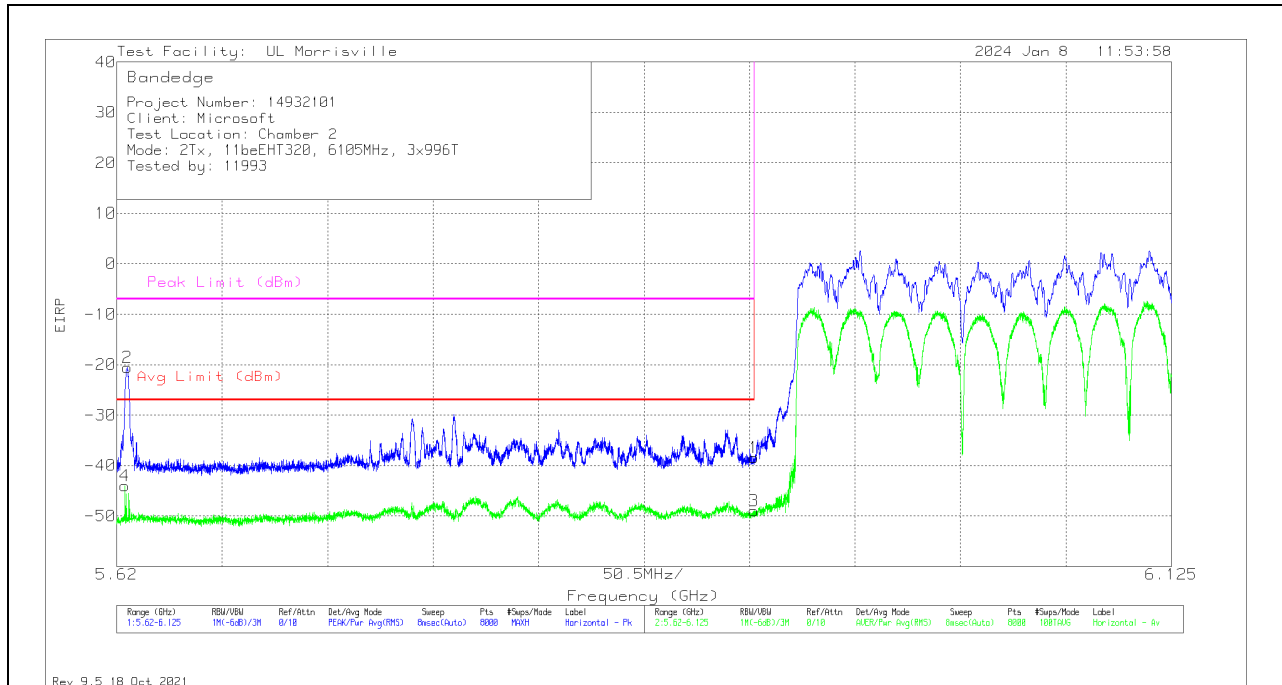

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62391	-77.57	RMS	34.6	-23	11.8	10	.17	-44	-27	-17	-	-	89	252	H
2	5.62505	-54	Pk	34.6	-23	11.8	10	0	-20.6	-	-	-7	-13.6	89	252	H
1	5.925	-72.74	Pk	35	-22.6	11.8	10.1	0	-38.44	-	-	-7	-31.44	89	252	H
3	5.925	-83.47	RMS	35	-22.6	11.8	10.1	.17	-49	-27	-22	-	-	89	252	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

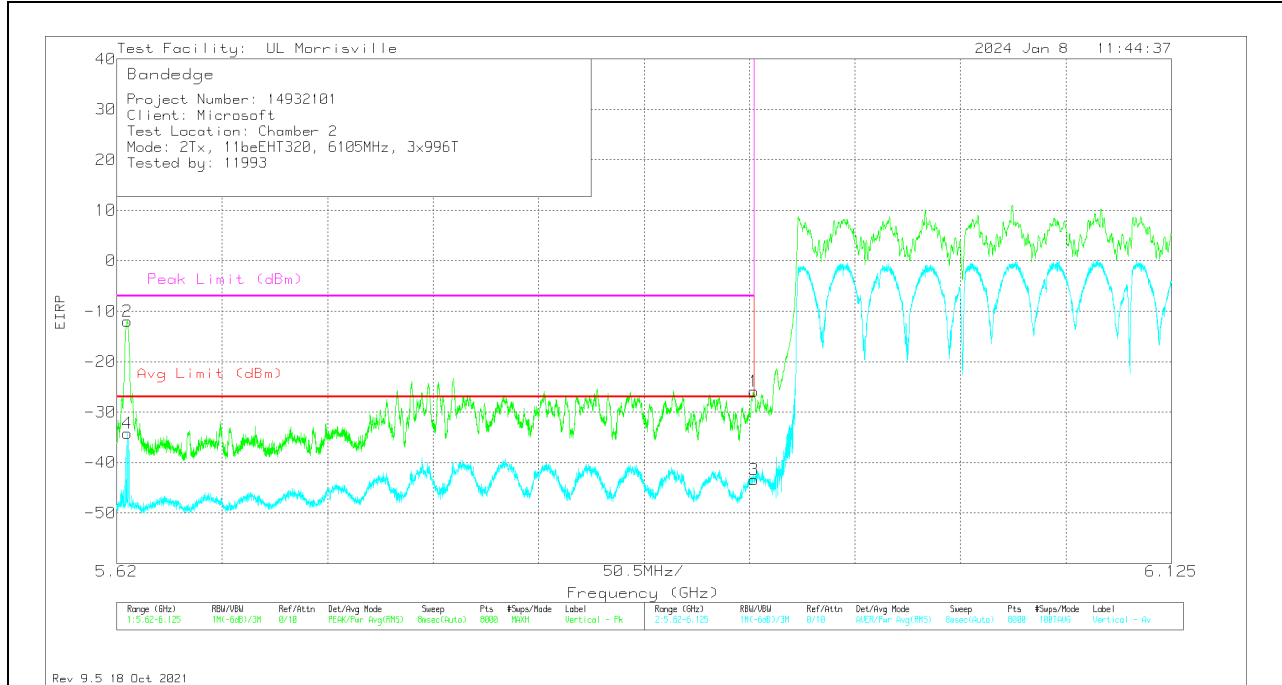


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62492	-45.36	Pk	34.6	-23	11.8	10	0	-11.96	-	-	-7	-4.96	69	220	V
4	5.62499	-67.79	RMS	34.6	-23	11.8	10	.17	-34.22	-27	-7.22	-	-	69	219	V
1	5.925	-60.19	Pk	35	-22.6	11.8	10.1	0	-25.89	-	-	-7	-18.89	69	220	V
3	5.925	-77.83	RMS	35	-22.6	11.8	10.1	.17	-43.36	-27	-16.36	-	-	69	219	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

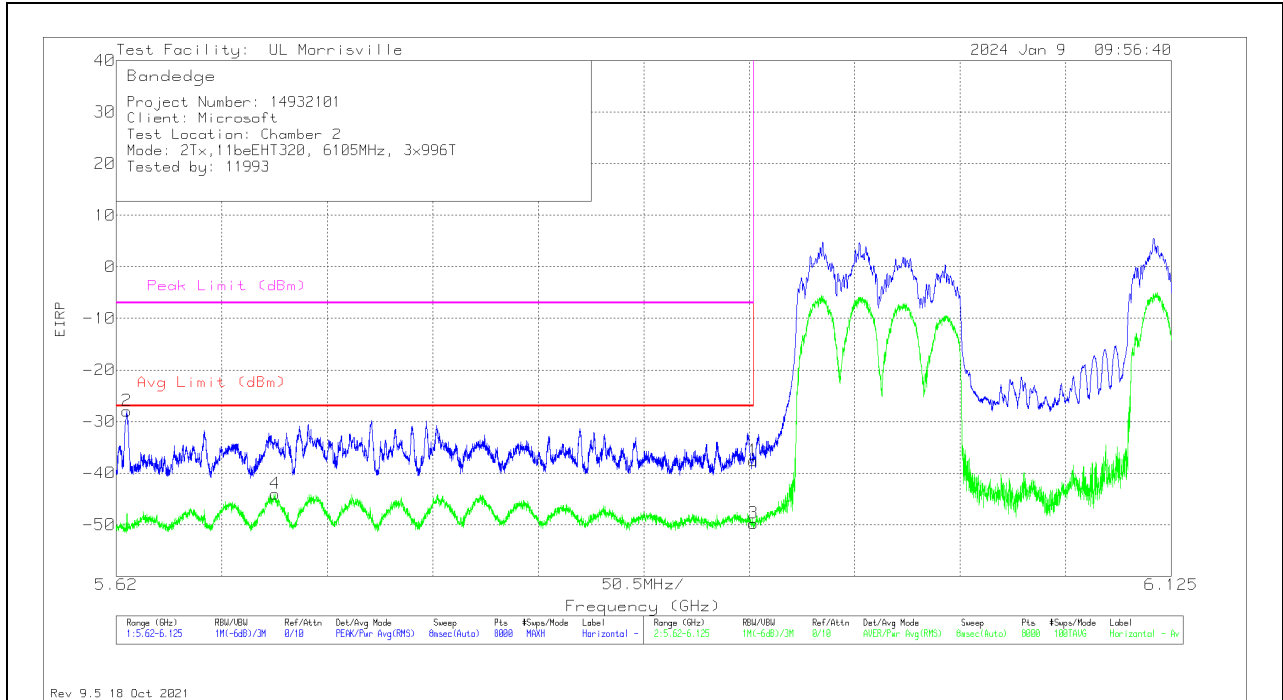


Rev 9.5 18 Oct 2021

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62505	-61.32	PK	34.6	-23	11.8	10	0	-27.92	-	-	-7	-20.92	89	353	H
4	5.69608	-77.57	RMS	34.6	-23	11.8	10	.17	-44	-27	-17	-	-	89	353	H
1	5.925	-71.86	PK	35	-22.6	11.8	10.1	0	-37.56	-	-	-7	-30.56	89	353	H
3	5.925	-84.2	RMS	35	-22.6	11.8	10.1	.17	-49.73	-27	-22.73	-	-	89	353	H

PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

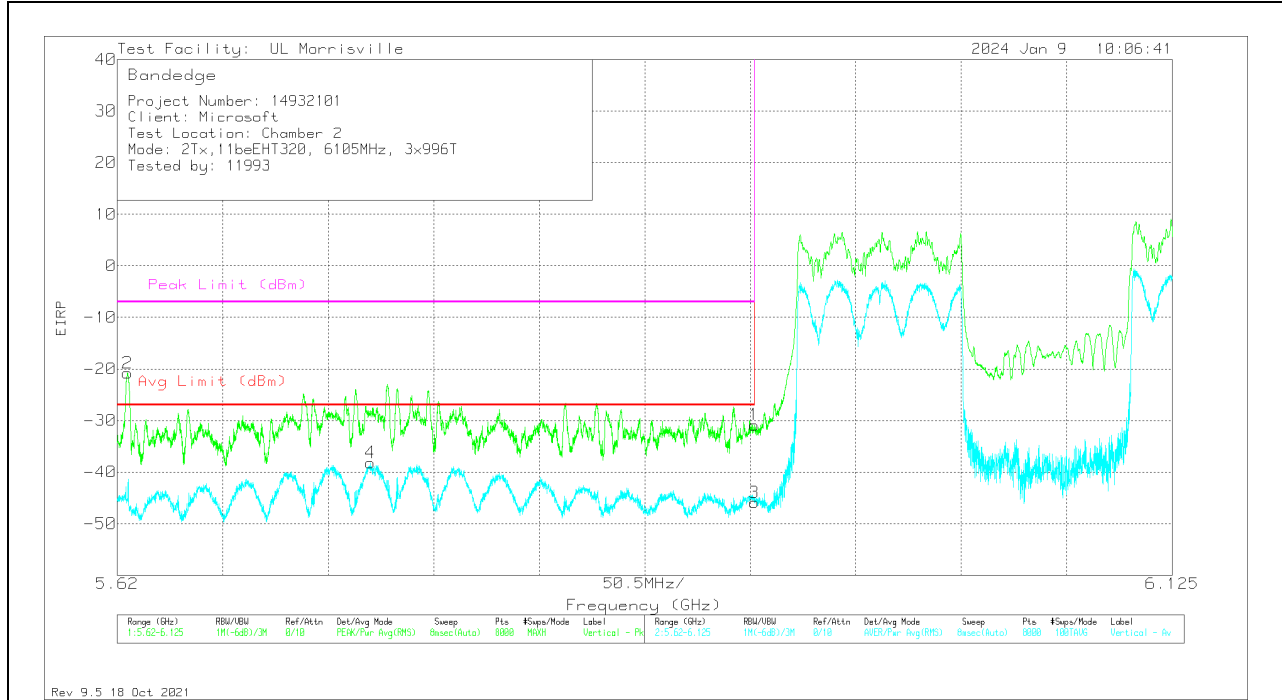


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62492	-54.21	Pk	34.6	-23	11.8	10	0	-20.81	-	-	-7	-13.81	71	254	V
4	5.74109	-71.67	RMS	34.7	-23.2	11.8	10	.17	-38.2	-27	-11.2	-	-	71	254	V
1	5.925	-65.15	PK	35	-22.6	11.8	10.1	0	-30.85	-	-	-7	-23.85	71	254	V
3	5.925	-80.37	RMS	35	-22.6	11.8	10.1	.17	-45.9	-27	-18.9	-	-	71	254	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

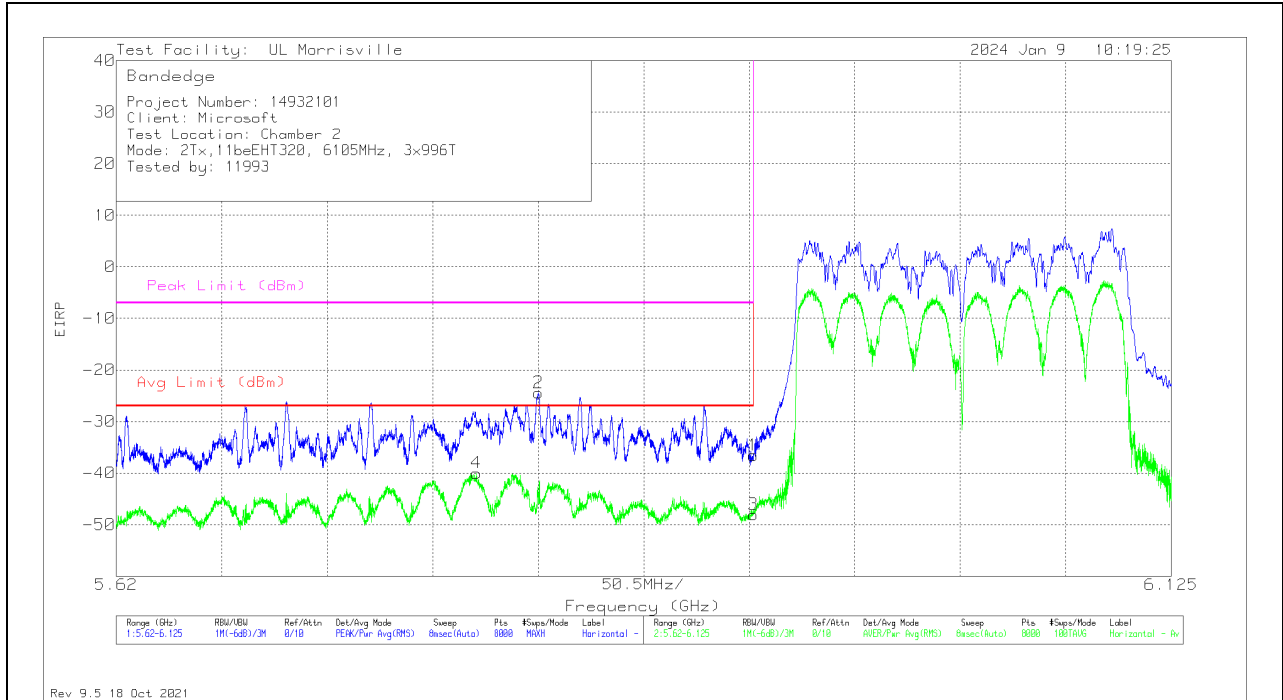

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.79242	-73.59	RMS	34.8	-23	11.8	10	-39.99	-27	-12.99	-	-	94	336	H
2	5.82215	-58.04	Pk	34.8	-23	11.8	10	-24.44	-	-	-7	-17.44	94	336	H
1	5.925	-70.85	Pk	35	-22.6	11.8	10.1	-36.55	-	-	-7	-29.55	94	336	H
3	5.925	-82.35	RMS	35	-22.6	11.8	10.1	-48.05	-27	-21.05	-	-	94	336	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

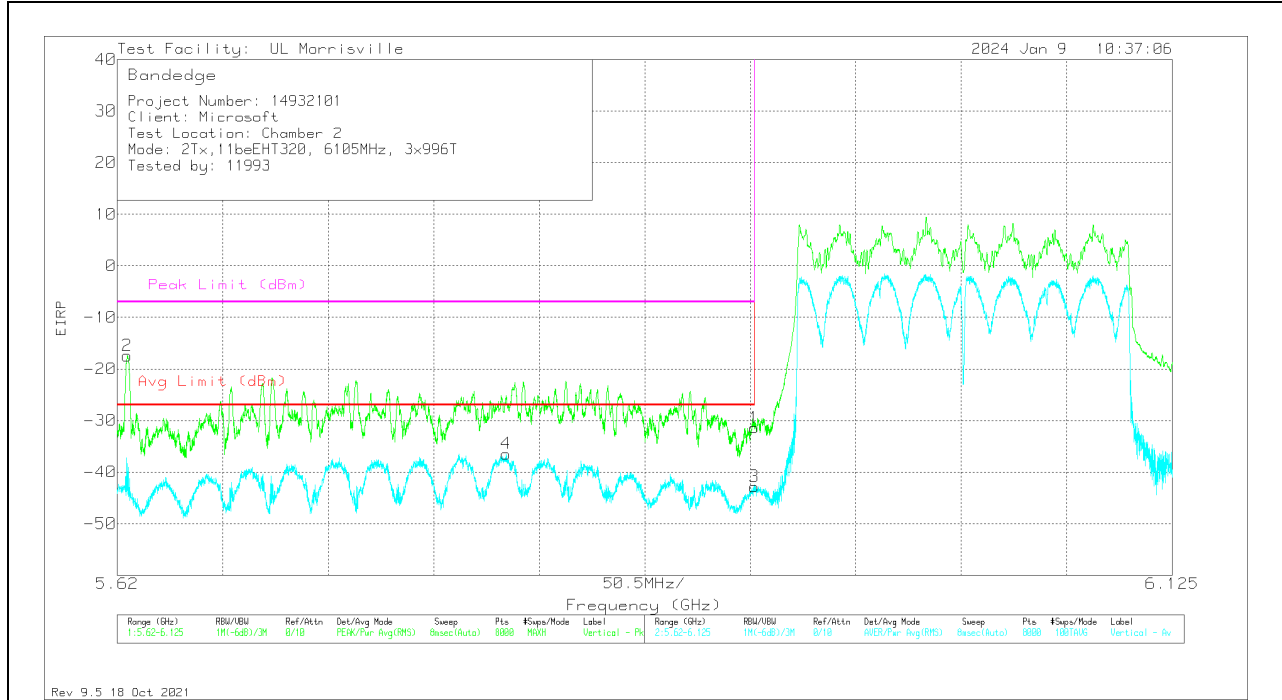


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62486	-50.83	Pk	34.6	-23	11.8	10	0	-17.43	-	-	-7	-10.43	68	250	V
4	5.80605	-70.22	RMS	34.8	-23	11.8	10	.17	-36.45	-27	-9.45	-	-	68	250	V
1	5.925	-65.69	PK	35	-22.6	11.8	10.1	0	-31.39	-	-	-7	-24.39	68	250	V
3	5.925	-77.3	RMS	35	-22.6	11.8	10.1	.17	-42.83	-27	-15.83	-	-	68	250	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T+484T (CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

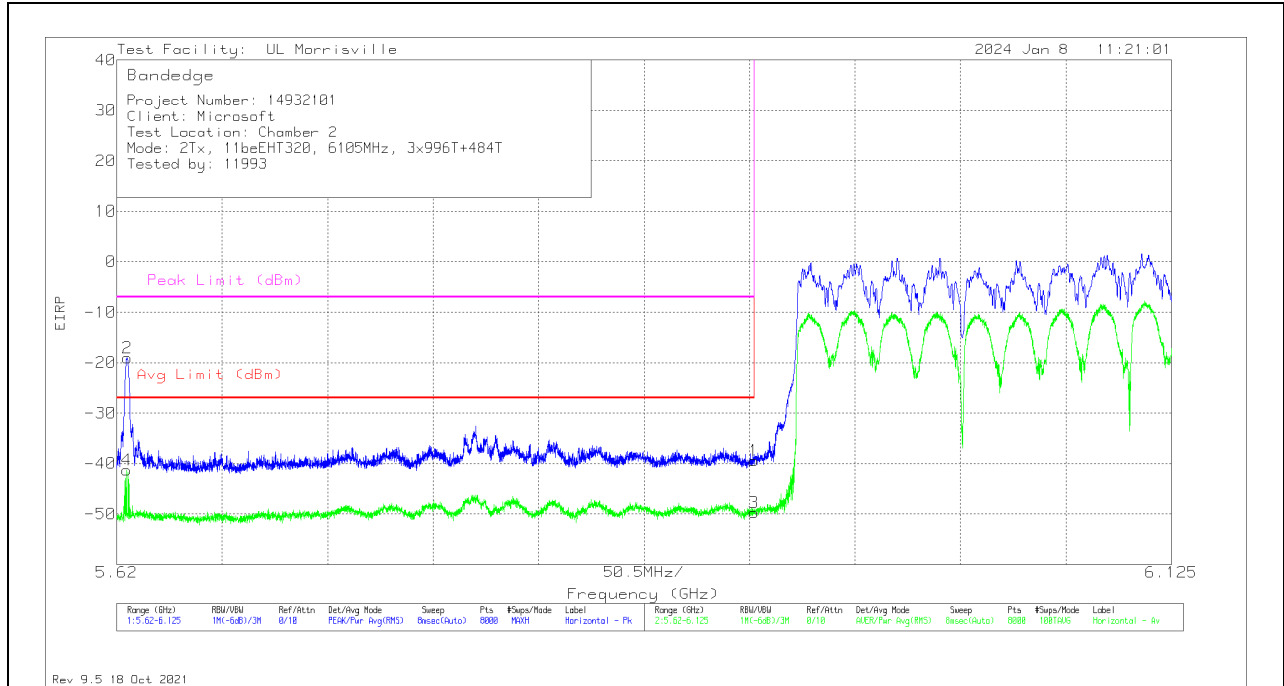

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.6248	-74.82	RMS	34.6	-23	11.8	10	.18	-41.24	-27	-14.24	-	-	91	252	H
2	5.62492	-52.46	Pk	34.6	-23	11.8	10	0	-19.06	-	-	-7	-12.06	91	252	H
1	5.925	-73.7	Pk	35	-22.6	11.8	10.1	0	-39.4	-	-	-7	-32.4	91	252	H
3	5.925	-84.19	RMS	35	-22.6	11.8	10.1	.18	-49.71	-27	-22.71	-	-	91	252	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

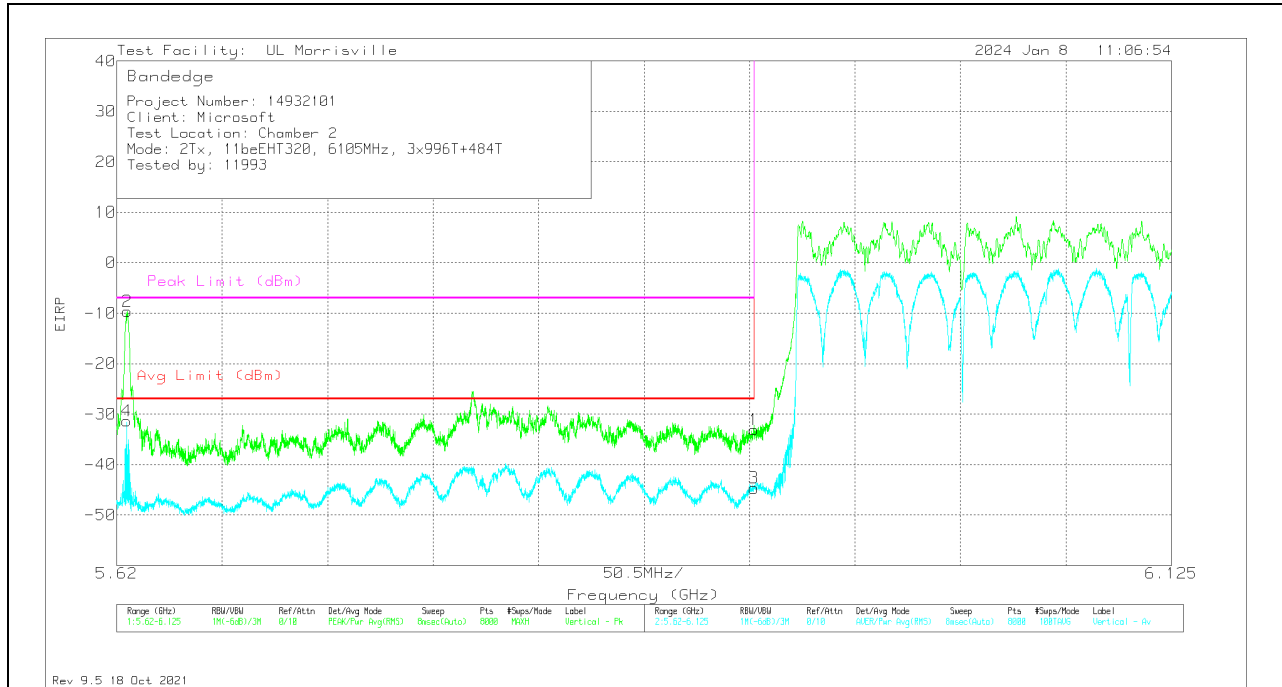


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62486	-64.97	RMS	34.6	-23	11.8	10	.18	-31.39	-27	-4.39	-	-	69	218	V
2	5.62492	-42.99	PK	34.6	-23	11.8	10	0	-9.59	-	-	-7	-2.59	69	218	V
1	5.925	-67.45	PK	35	-22.6	11.8	10.1	0	-33.15	-	-	-7	-26.15	69	218	V
3	5.925	-79.18	RMS	35	-22.6	11.8	10.1	.18	-44.7	-27	-17.7	-	-	69	218	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

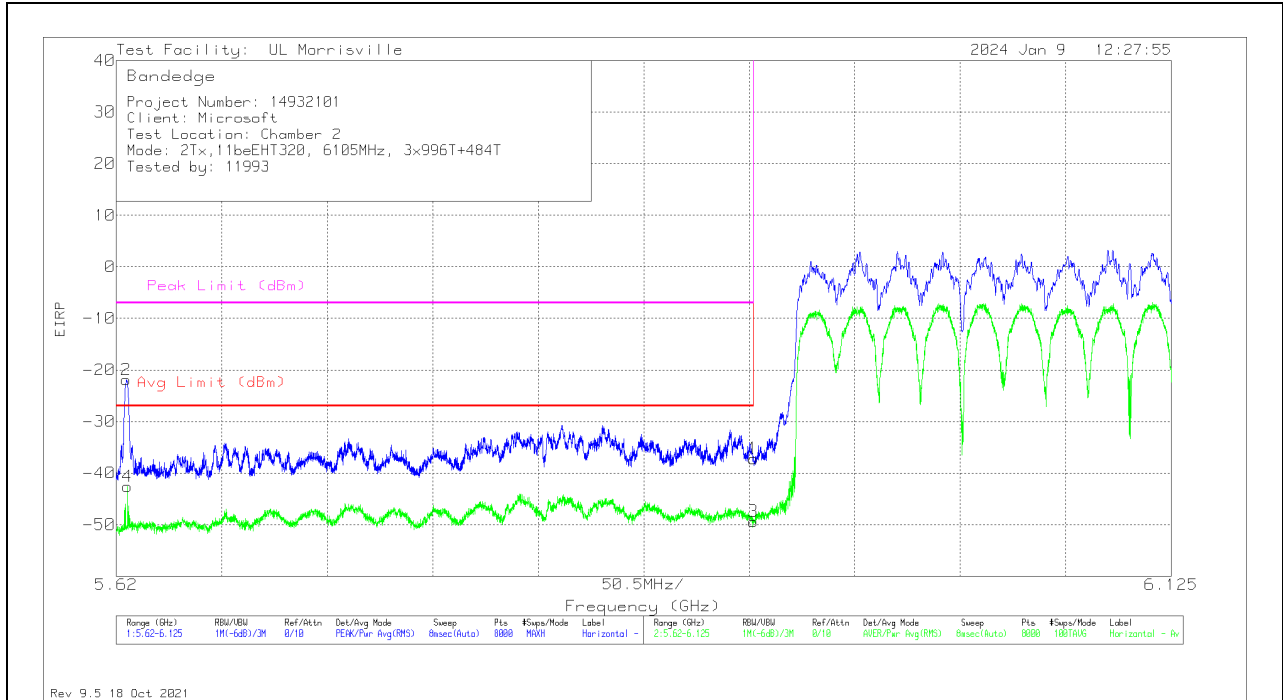

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62474	-55.29	PK	34.6	-23	11.8	10	0	-21.89	-	-	-7	-14.89	88	298	H
4	5.62537	-76.18	RMS	34.6	-23	11.8	10	.18	-42.6	-27	-15.6	-	-	88	298	H
1	5.925	-71.49	PK	35	-22.6	11.8	10.1	0	-37.19	-	-	-7	-30.19	88	298	H
3	5.925	-83.88	RMS	35	-22.6	11.8	10.1	.18	-49.4	-27	-22.4	-	-	88	298	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

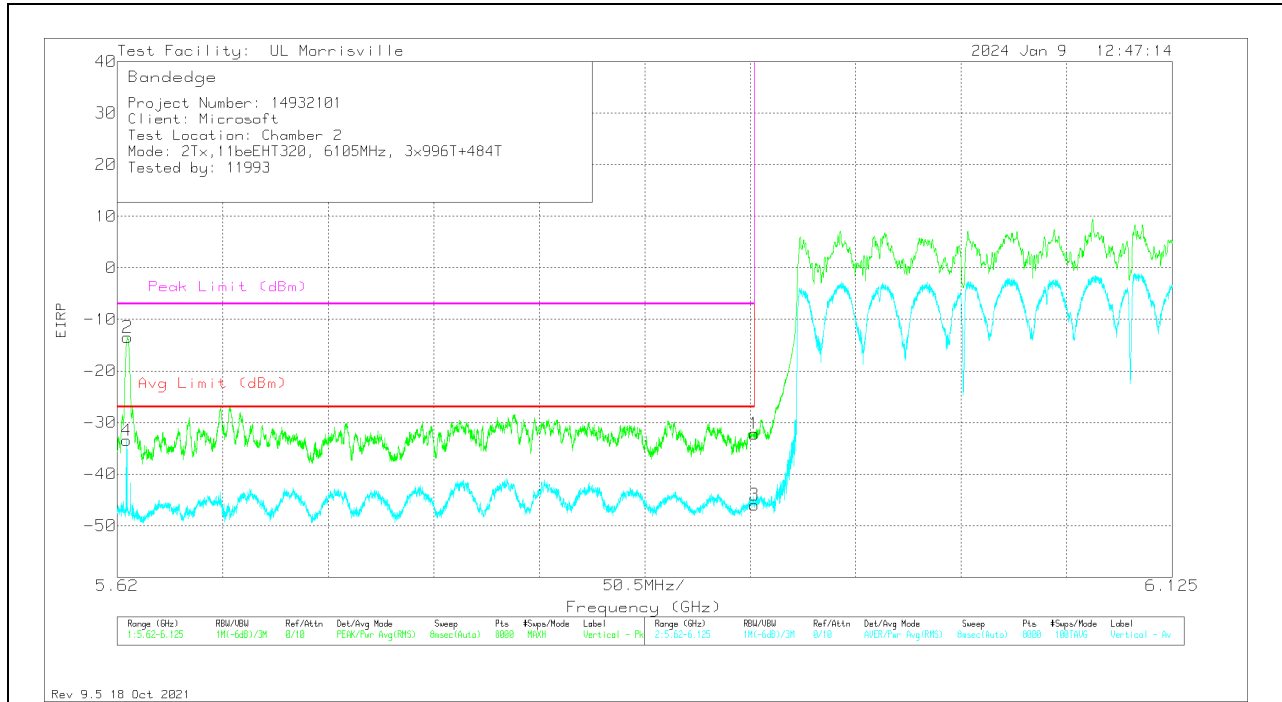


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62448	-67.05	RMS	34.6	-23	11.8	10	.18	-33.47	-27	-6.47	-	-	51	208	V
2	5.62492	-46.87	PK	34.6	-23	11.8	10	0	-13.47	-	-	-7	-6.47	51	208	V
1	5.925	-66.48	PK	35	-22.6	11.8	10.1	0	-32.18	-	-	-7	-25.18	51	208	V
3	5.925	-80.44	RMS	35	-22.6	11.8	10.1	.18	-45.96	-27	-18.96	-	-	51	208	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

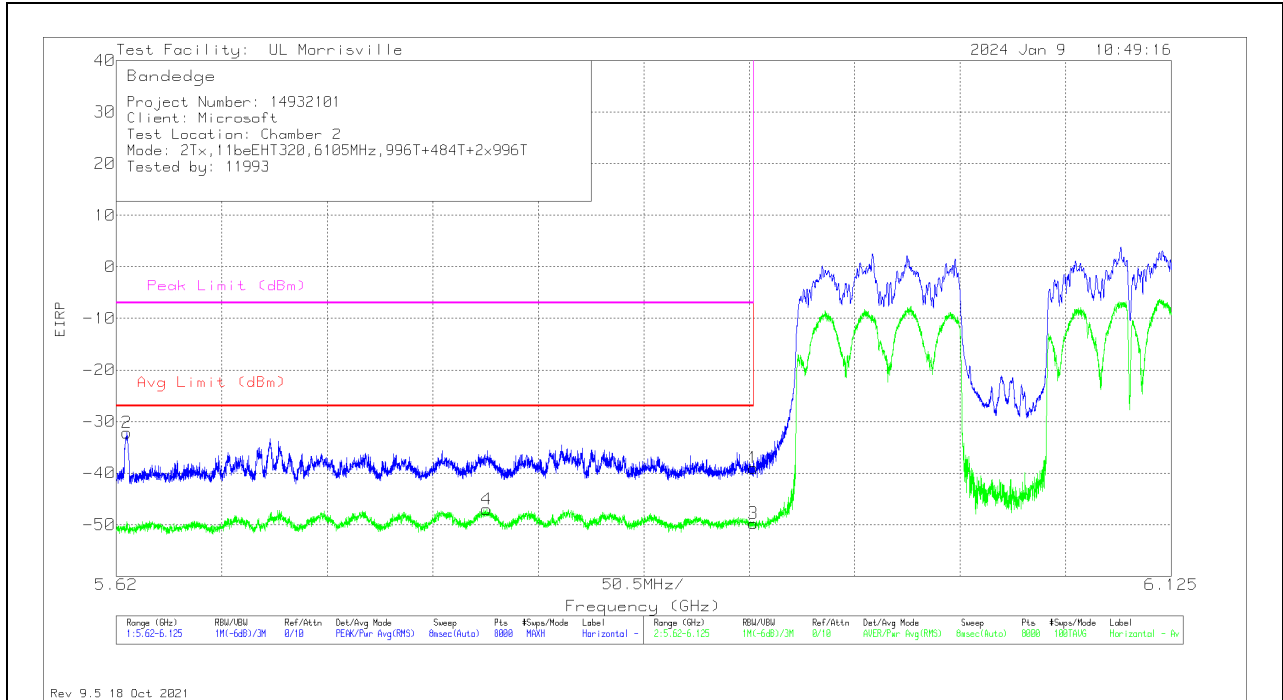


Rev 9.5 18 Oct 2021

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62499	-65.56	PK	34.6	-23	11.8	10	0	-32.16	-	-	-7	-25.16	79	262	H
4	5.79728	-80.8	RMS	34.8	-23	11.8	10	.18	-47.02	-27	-20.02	-	-	79	262	H
1	5.925	-73.3	PK	35	-22.6	11.8	10.1	0	-39	-	-	-7	-32	79	262	H
3	5.925	-84.26	RMS	35	-22.6	11.8	10.1	.18	-49.78	-27	-22.78	-	-	79	262	H

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

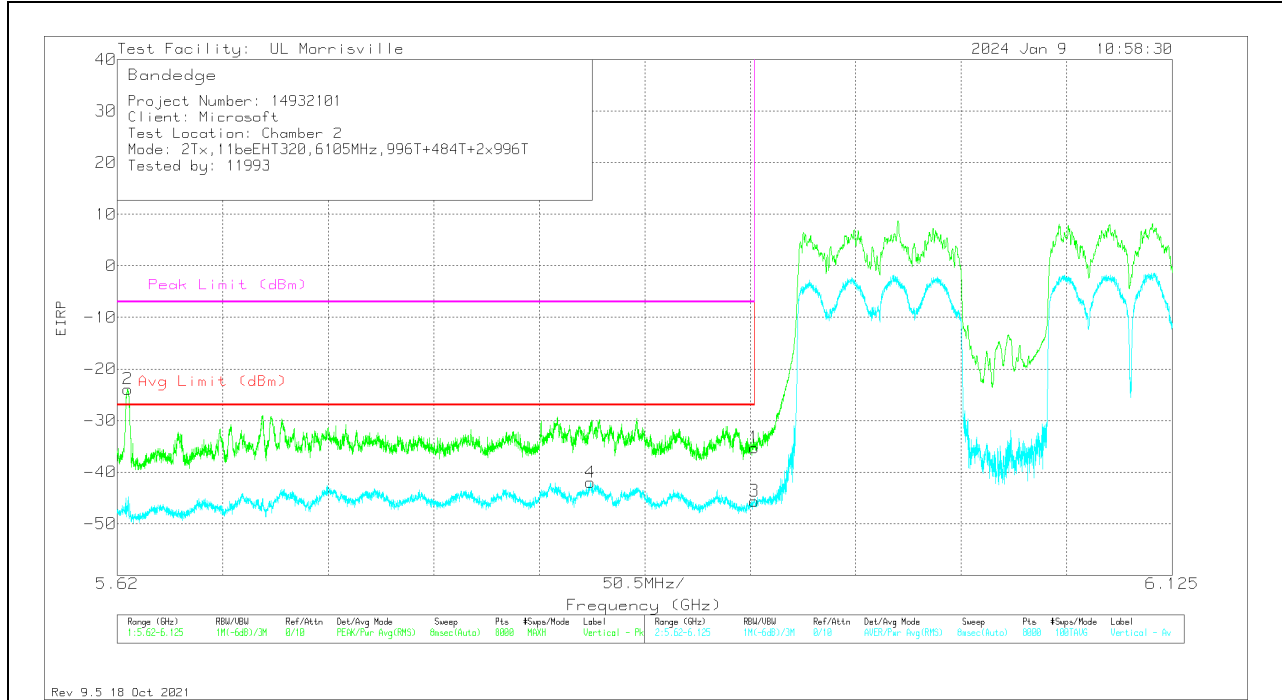


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62499	-57.31	Pk	34.6	-23	11.8	10	0	-23.91	-	-	-7	-16.91	359	254	V
4	5.84652	-75.98	RMS	34.9	-22.9	11.8	10	.18	-42	-27	-15	-	-	359	254	V
1	5.925	-69.57	PK	35	-22.6	11.8	10.1	0	-35.27	-	-	-7	-28.27	359	254	V
3	5.925	-80.09	RMS	35	-22.6	11.8	10.1	.18	-45.61	-27	-18.61	-	-	359	254	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

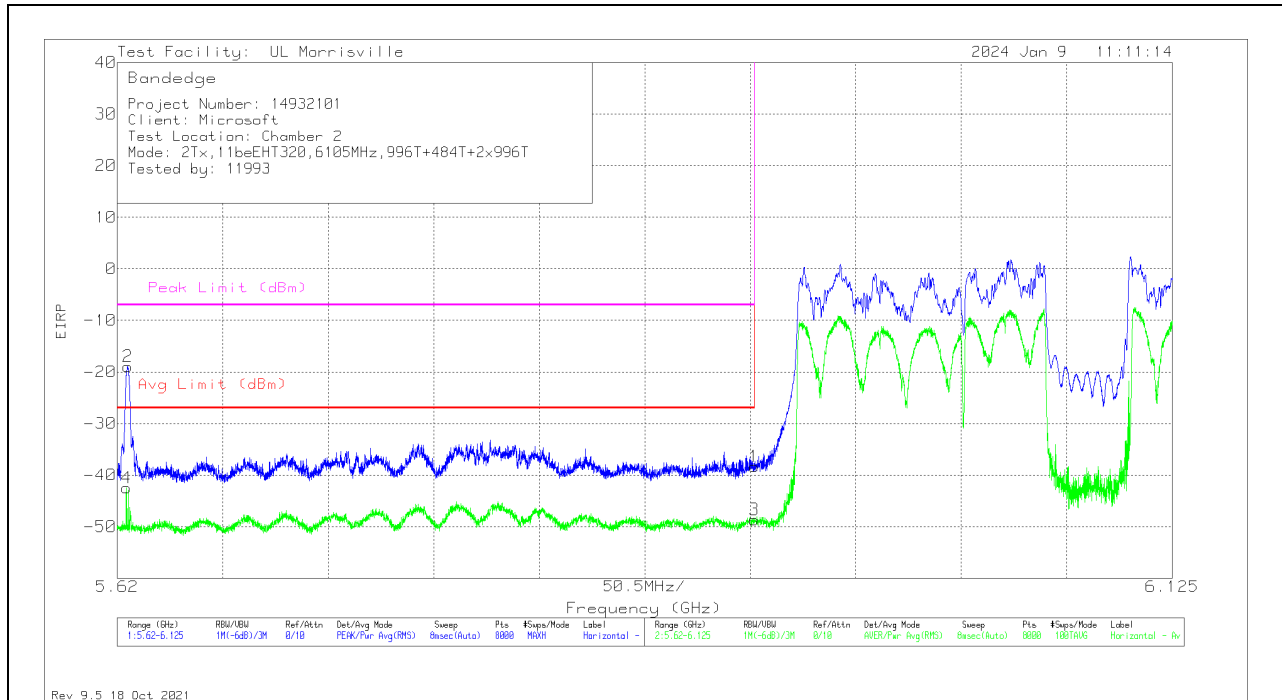

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62455	-76.06	RMS	34.6	-23	11.8	10	.18	-42.48	-27	-15.48	-	-	79	355	H
2	5.62505	-52.36	Pk	34.6	-23	11.8	10	0	-18.96	-	-	-7	-11.96	79	356	H
1	5.925	-72.65	Pk	35	-22.6	11.8	10.1	0	-38.35	-	-	-7	-31.35	79	356	H
3	5.925	-83.14	RMS	35	-22.6	11.8	10.1	.18	-48.66	-27	-21.66	-	-	79	355	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

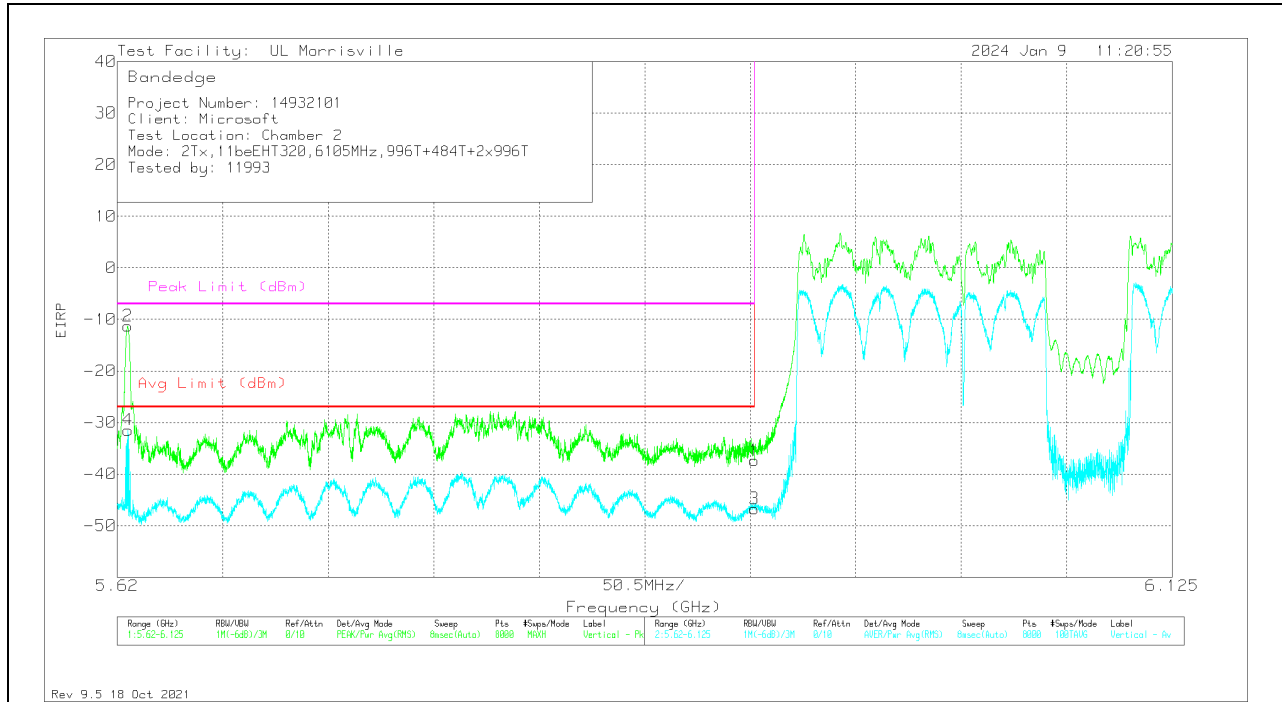


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62505	-44.69	Pk	34.6	-23	11.8	10	0	-11.29	-	-	-7	-4.29	70	263	V
4	5.62518	-65.03	RMS	34.6	-23	11.8	10	.18	-31.45	-27	-4.45	-	-	70	263	V
1	5.925	-71.68	PK	35	-22.6	11.8	10.1	0	-37.38	-	-	-7	-30.38	70	263	V
3	5.925	-81.2	RMS	35	-22.6	11.8	10.1	.18	-46.72	-27	-19.72	-	-	70	263	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

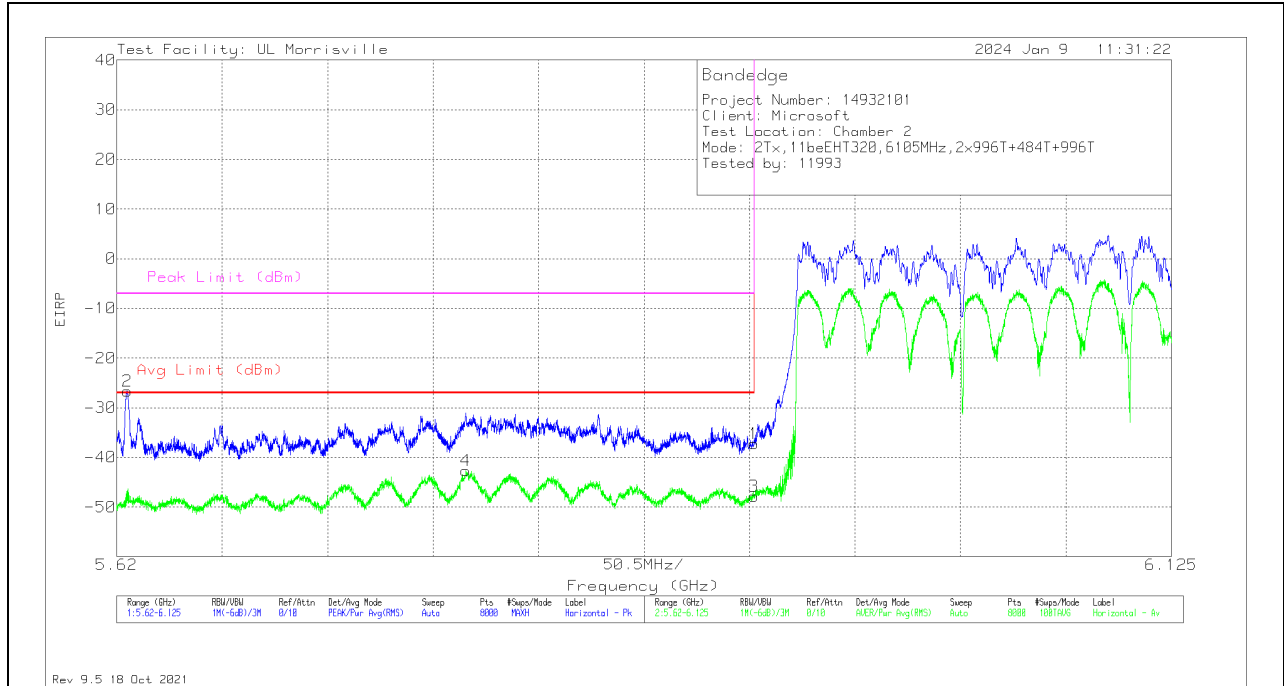

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62492	-60.03	Pk	34.6	-23	11.8	10	0	-26.63	-	-	-7	-19.63	95	321	H
4	5.78724	-76.6	RMS	34.8	-23	11.8	10.1	.18	-42.72	-27	-15.72	-	-	95	320	H
1	5.925	-71.52	Pk	35	-22.6	11.8	10.1	0	-37.22	-	-	-7	-30.22	95	321	H
3	5.925	-82.28	RMS	35	-22.6	11.8	10.1	.18	-47.8	-27	-20.8	-	-	95	320	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

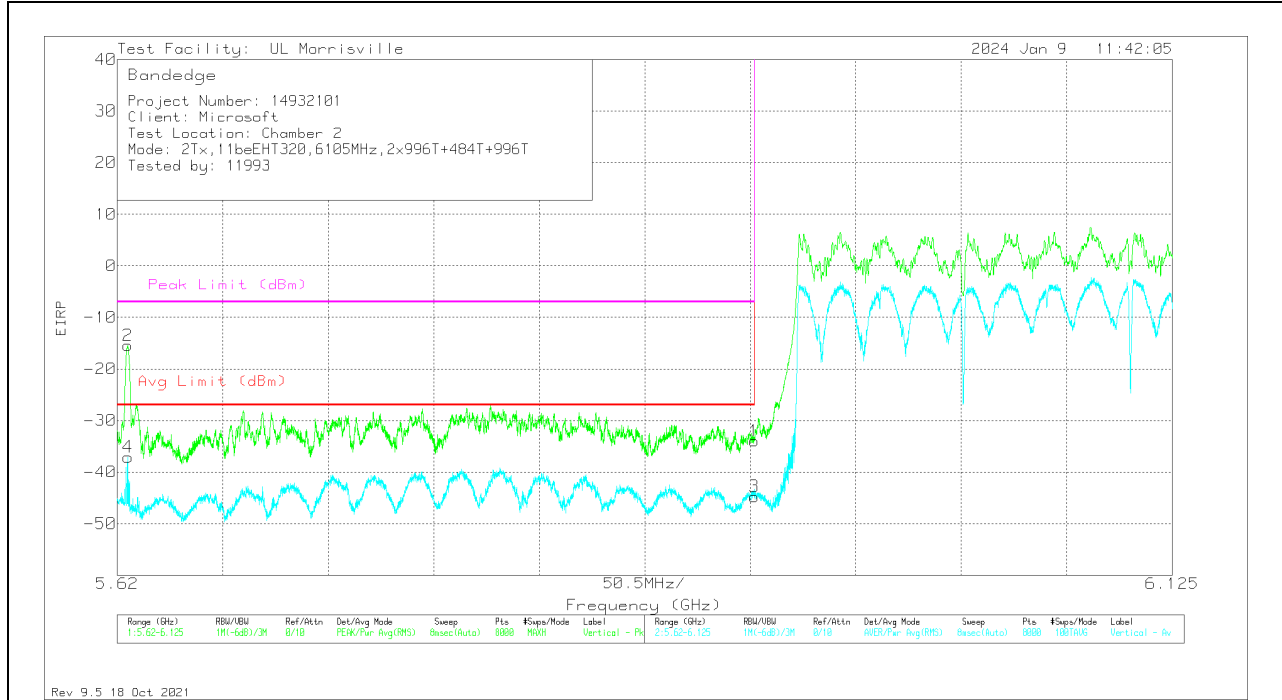


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62499	-48.85	Pk	34.6	-23	11.8	10	0	-15.45	-	-	-7	-8.45	70	254	V
4	5.62518	-70.67	RMS	34.6	-23	11.8	10	.18	-37.09	-27	-10.09	-	-	70	254	V
1	5.925	-68.27	PK	35	-22.6	11.8	10.1	0	-33.97	-	-	-7	-26.97	70	254	V
3	5.925	-79.24	RMS	35	-22.6	11.8	10.1	.18	-44.76	-27	-17.76	-	-	70	254	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2)

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

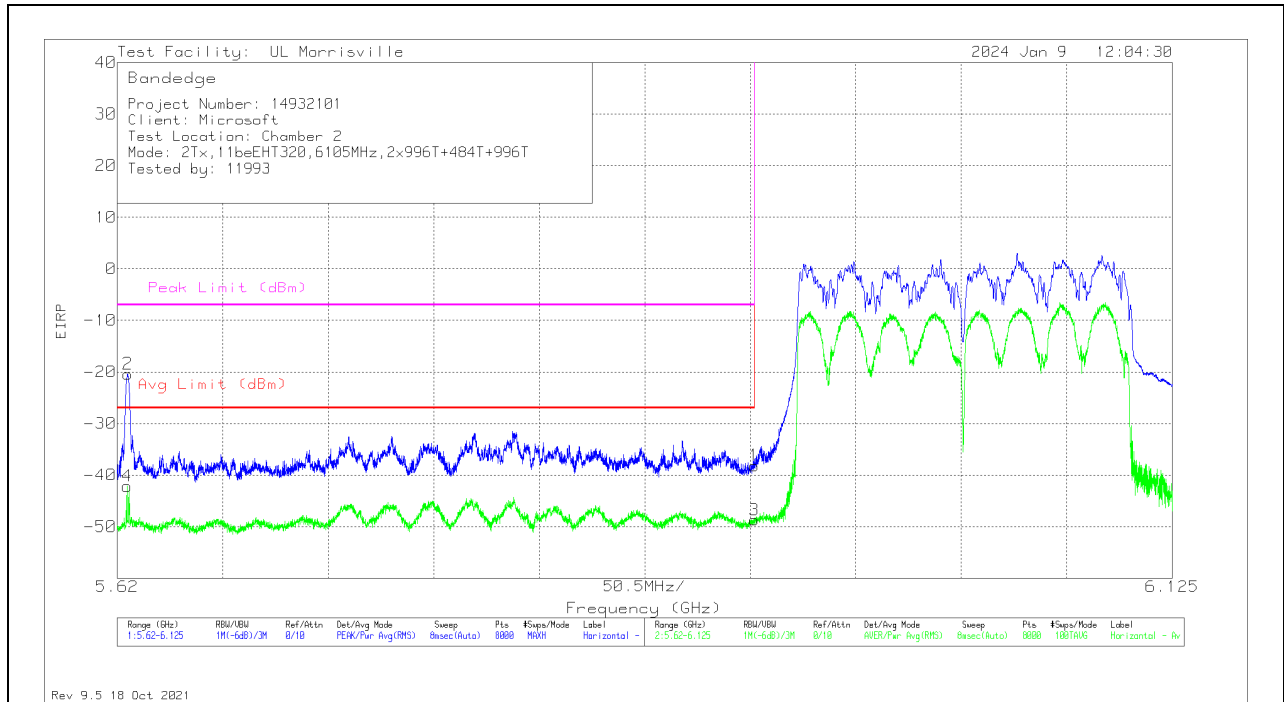

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.6248	-75.73	RMS	34.6	-23	11.8	10	.18	-42.15	-27	-15.15	-	-	91	291	H
2	5.62505	-53.8	Pk	34.6	-23	11.8	10	0	-20.4	-	-	-7	-13.4	91	292	H
1	5.925	-72.46	Pk	35	-22.6	11.8	10.1	0	-38.16	-	-	-7	-31.16	91	292	H
3	5.925	-83.17	RMS	35	-22.6	11.8	10.1	.18	-48.69	-27	-21.69	-	-	91	291	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

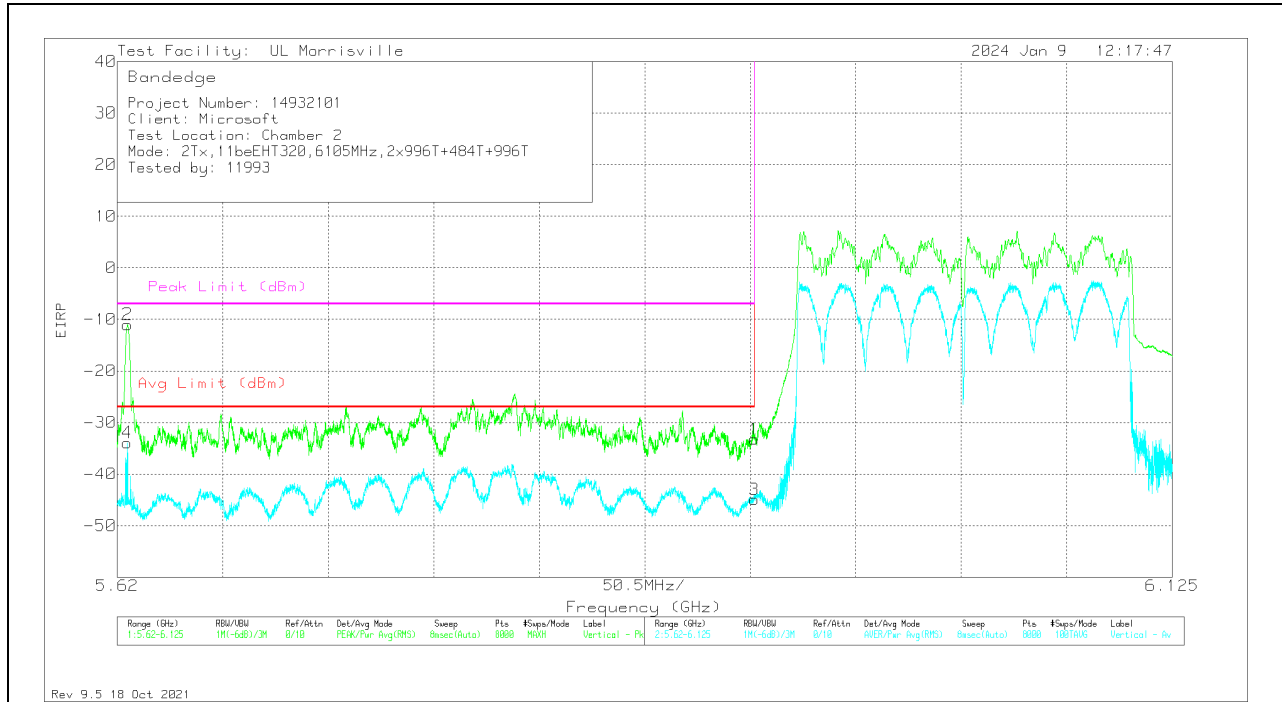


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62474	-67.51	RMS	34.6	-23	11.8	10	.18	-33.93	-27	-6.93	-	-	68	254	V
2	5.62492	-44.42	PK	34.6	-23	11.8	10	0	-11.02	-	-	-7	-4.02	68	254	V
1	5.925	-67.52	PK	35	-22.6	11.8	10.1	0	-33.22	-	-	-7	-26.22	68	254	V
3	5.925	-79.41	RMS	35	-22.6	11.8	10.1	.18	-44.93	-27	-17.93	-	-	68	254	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: SU

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

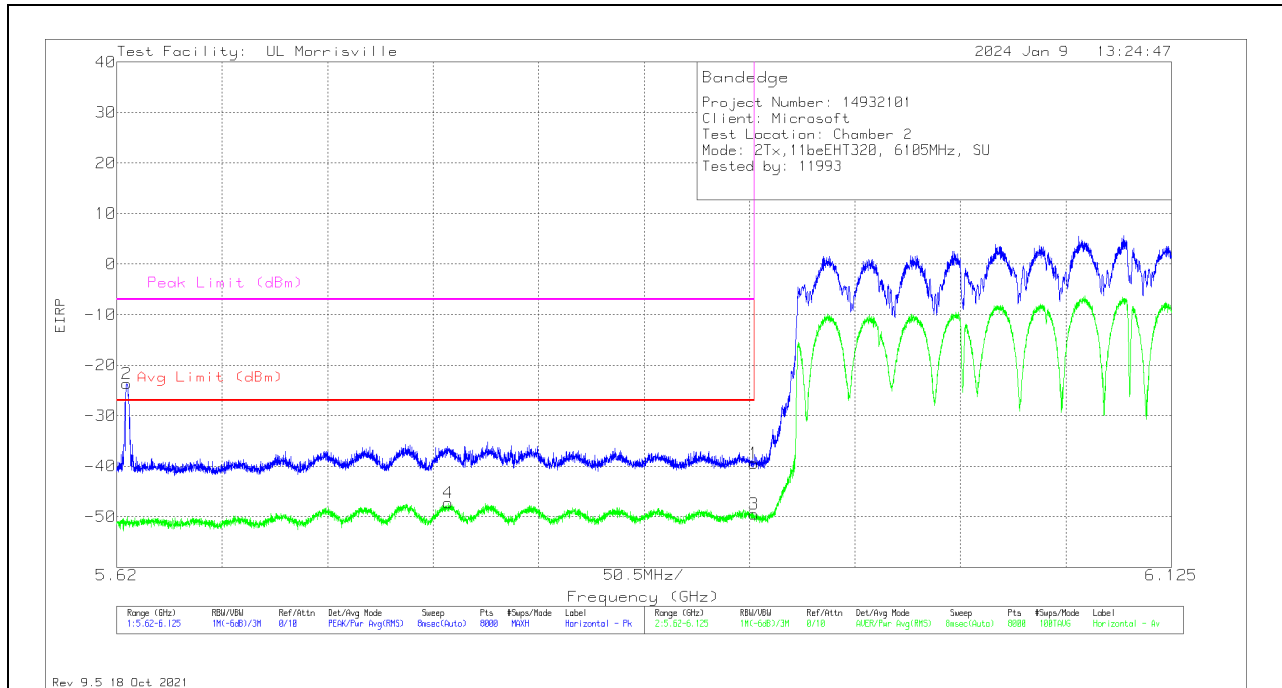

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62486	-57.02	Pk	34.6	-23	11.8	10	0	-23.62	-	-	-7	-16.62	80	293	H
4	5.77878	-80.94	RMS	34.8	-23.1	11.8	10.1	.11	-47.23	-27	-20.23	-	-	80	293	H
1	5.925	-73.69	Pk	35	-22.6	11.8	10.1	0	-39.39	-	-	-7	-32.39	80	293	H
3	5.925	-83.92	RMS	35	-22.6	11.8	10.1	.11	-49.51	-27	-22.51	-	-	80	293	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

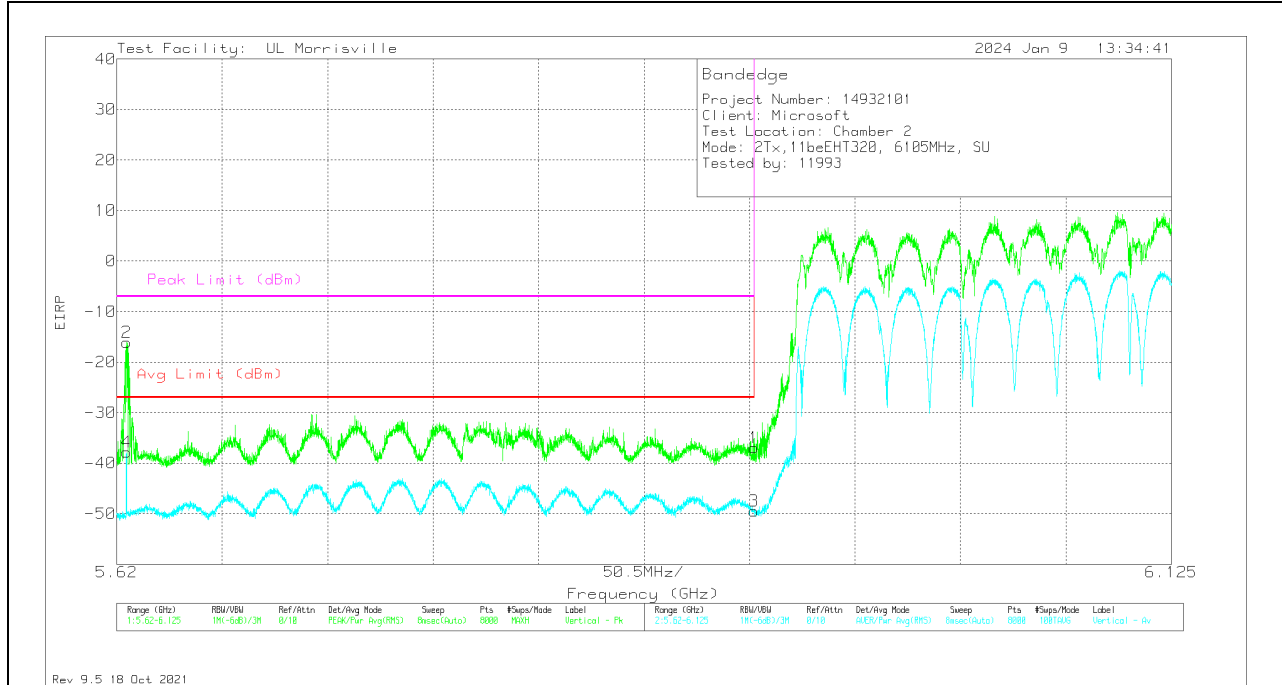

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Pad (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.62474	-71.28	RMS	34.6	-23	11.8	10	.11	-37.77	-27	-10.77	-	-	57	210	V
2	5.6248	-49.44	Pk	34.6	-23	11.8	10	0	-16.04	-	-	-7	-9.04	57	211	V
1	5.925	-71.25	Pk	35	-22.6	11.8	10.1	0	-36.95	-	-	-7	-29.95	57	211	V
3	5.925	-83.91	RMS	35	-22.6	11.8	10.1	.11	-49.5	-27	-22.5	-	-	57	210	V



Pk - Peak detector
 RMS - RMS detection

11.1.7. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE UNII-6 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 242T

HARMONICS AND SPURIOUS EMISSIONS

LOW

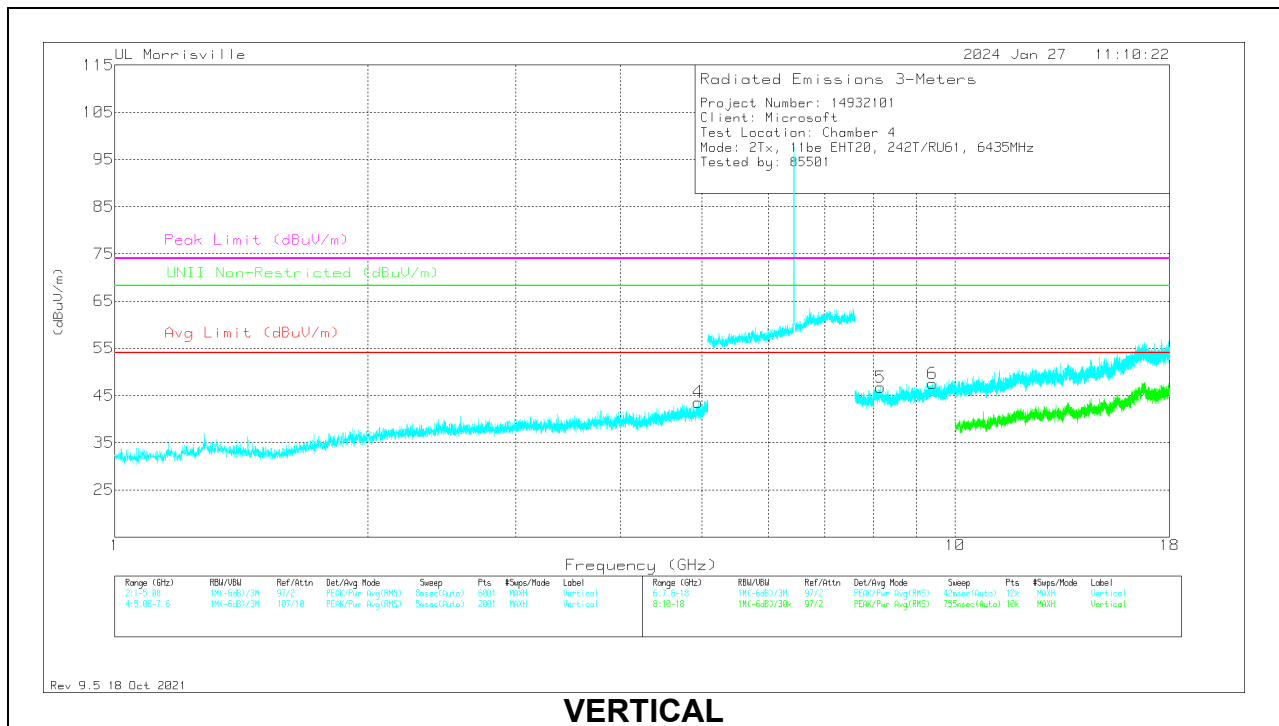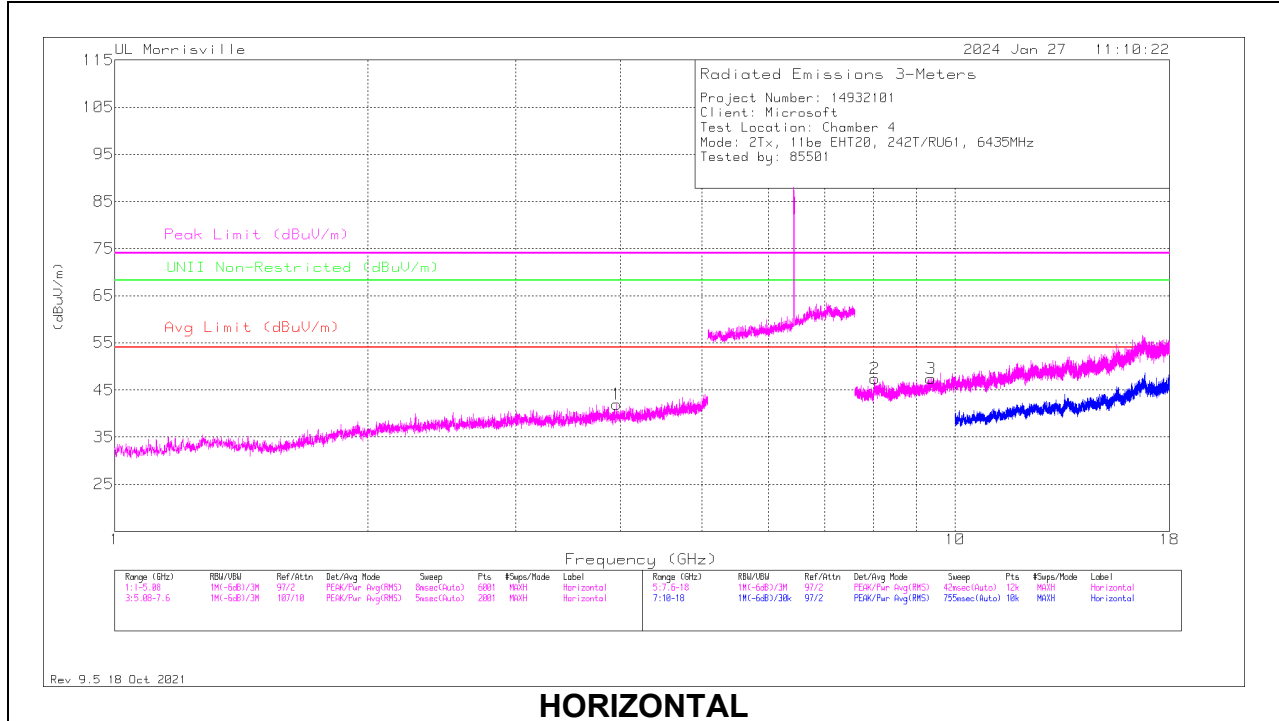


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.95596	41.09	Pk	33.4	-32.5	0	41.99	54	-12.01	74	-32.01	-	-	0-360	100	H
4	* ** 4.95012	40.11	Pk	33.9	-30.4	0	43.61	54	-10.39	74	-30.39	-	-	0-360	200	V
2	* ** 8.0316	38.64	Pk	35.8	-27.9	.9	47.44	54	-6.56	74	-26.56	-	-	0-360	100	H
5	* ** 8.159	37.68	Pk	35.8	-27.7	.9	46.68	54	-7.32	74	-27.32	-	-	0-360	200	V
3	* ** 9.36367	36.08	Pk	36.5	-25.6	.4	47.38	54	-6.62	74	-26.62	-	-	0-360	100	H
6	* ** 9.3966	36.74	Pk	36.6	-26.2	.4	47.54	54	-6.46	74	-26.46	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

MID

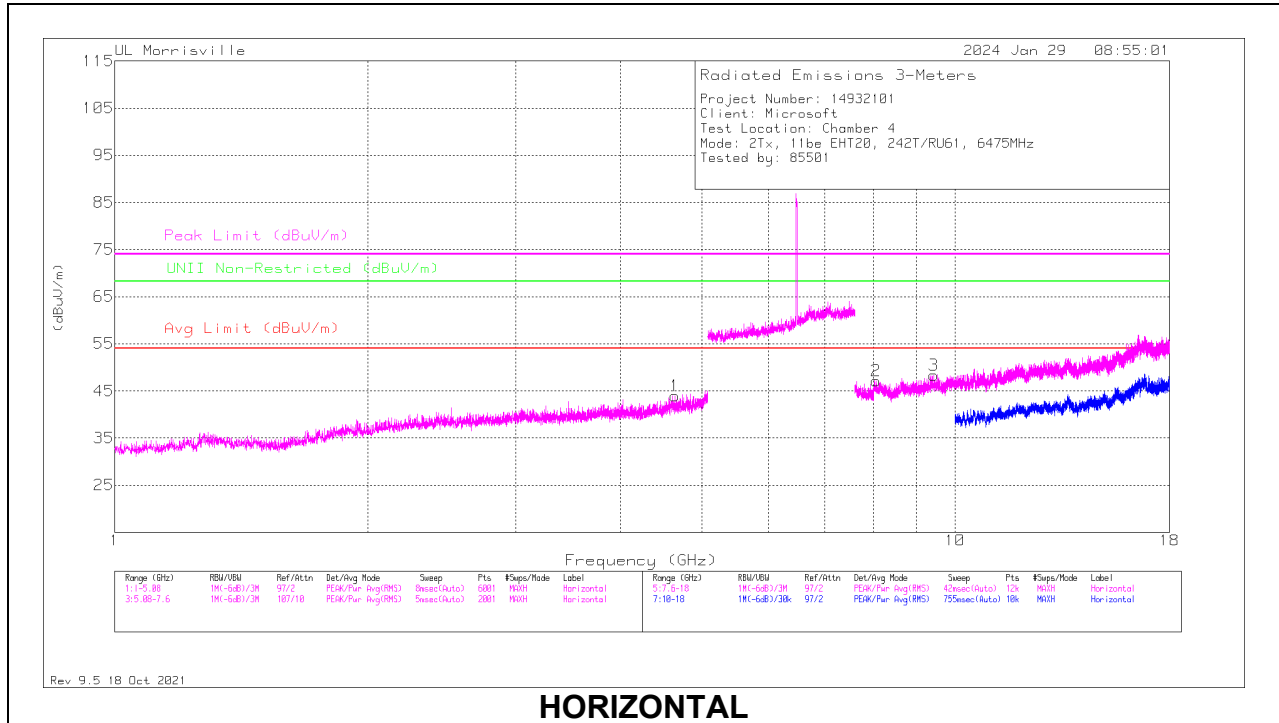

HORIZONTAL

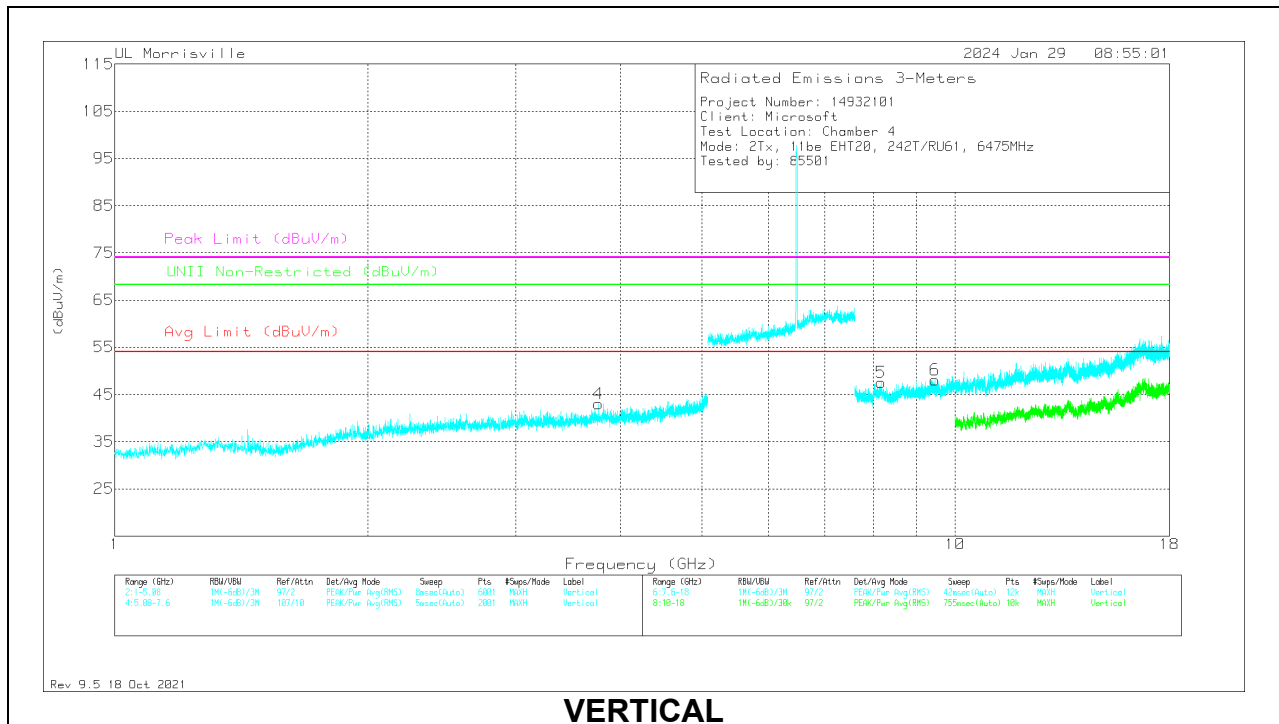

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.64344	40.6	Pk	34.1	-30.7	0	44	54	-10	74	-30	-	-	0-360	100	H
4	*** 3.76556	42.98	Pk	33.2	-33.2	0	42.98	54	-11.02	74	-31.02	-	-	0-360	200	V
2	*** 8.05587	38.42	Pk	35.8	-28	.9	47.12	54	-6.88	74	-26.88	-	-	0-360	100	H
5	*** 8.17373	38.5	Pk	35.8	-27.7	.9	47.5	54	-6.5	74	-26.5	-	-	0-360	200	V
3	*** 9.42985	38.08	PK2	36.7	-26	.4	49.18	-	-	74	-24.82	-	-	12	149	H
	*** 9.4301	26.13	ADR	36.7	-26.1	.4	37.13	54	-16.87	-	-	-	-	12	149	H
6	*** 9.46943	38.04	PK2	36.7	-25.8	.3	49.24	-	-	74	-24.76	-	-	53	179	V
	*** 9.46623	26.13	ADR	36.7	-25.8	.3	37.33	54	-16.67	-	-	-	-	53	179	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADR - RMS average

HIGH

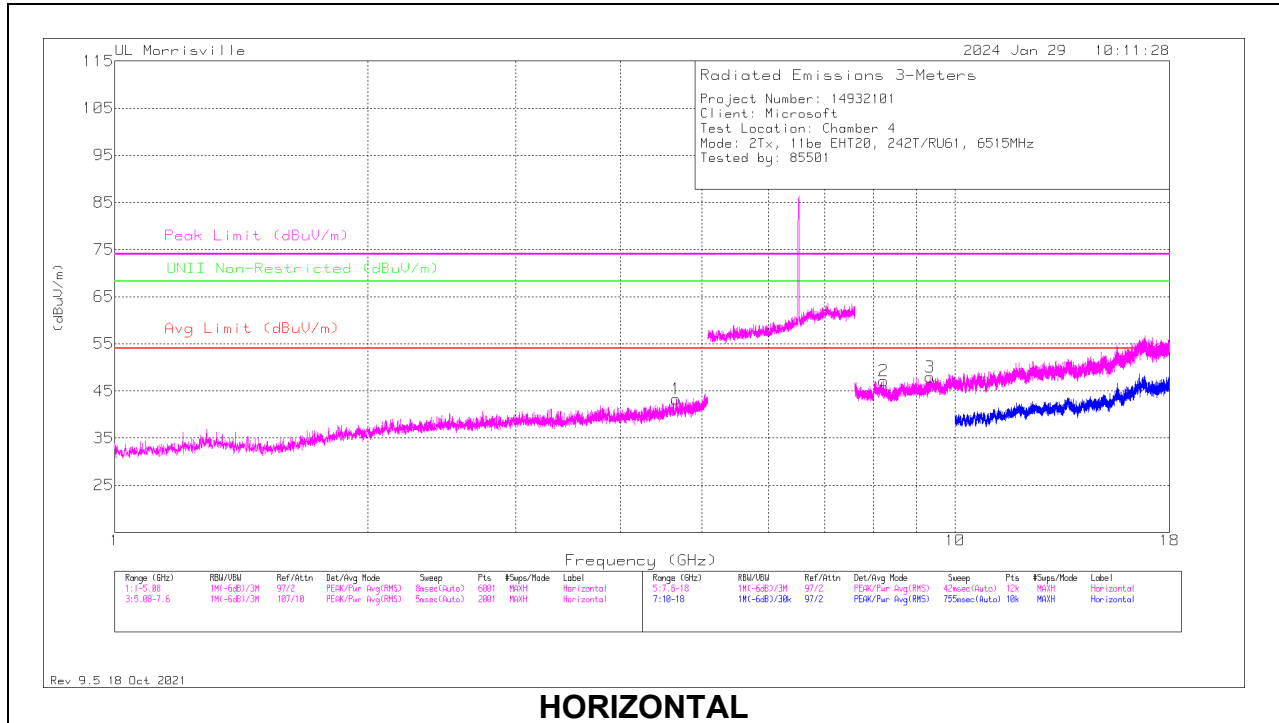

HORIZONTAL

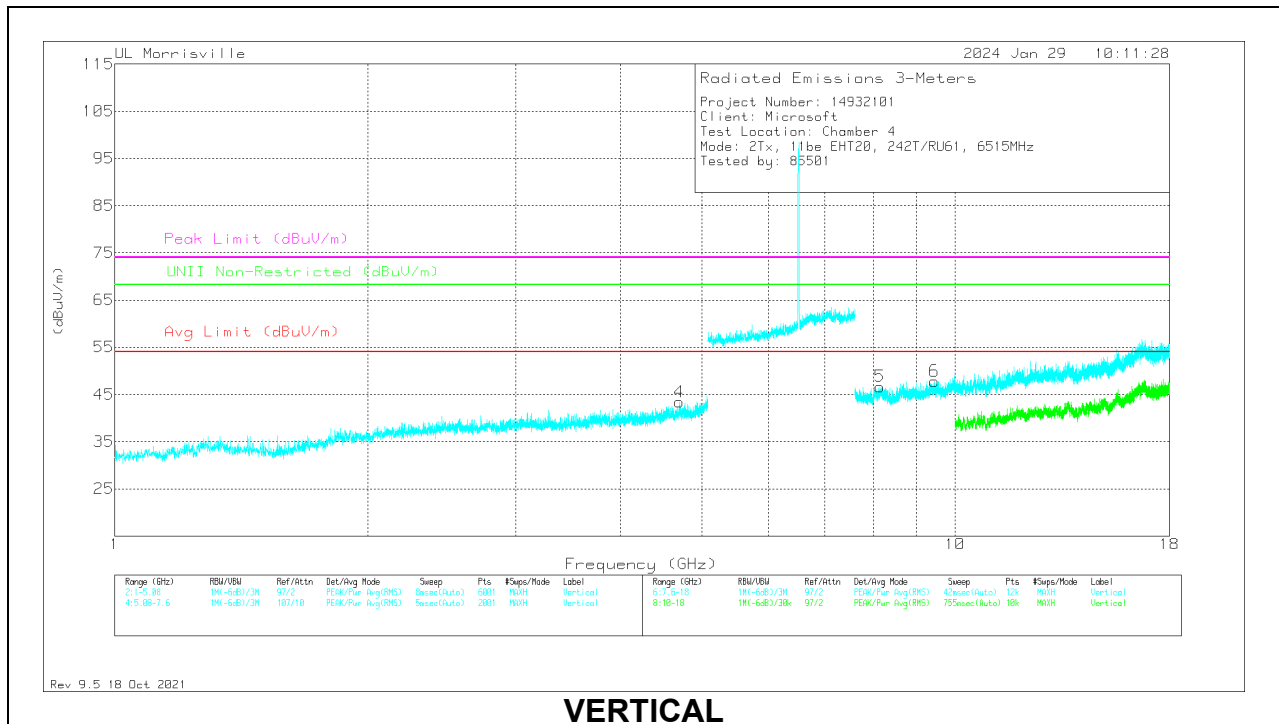

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.65704	40.22	Pk	34.1	-31	0	43.32	54	-10.68	74	-30.68	-	-	0-360	100	H
4	* ** 4.6958	40.61	Pk	34.1	-31.3	0	43.41	54	-10.59	74	-30.59	-	-	0-360	200	V
5	* ** 8.1382	37.67	Pk	35.8	-27.6	.8	46.67	54	-7.33	74	-27.33	-	-	0-360	100	V
2	* ** 8.2188	38.32	Pk	35.8	-27.7	.7	47.12	54	-6.88	74	-26.88	-	-	0-360	200	H
3	* ** 9.33593	36.88	Pk	36.5	-25.7	.3	47.98	54	-6.02	74	-26.02	-	-	0-360	200	H
6	* ** 9.4564	37.06	Pk	36.7	-26.2	.3	47.86	54	-6.14	74	-26.14	-	-	0-360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

11.1.8. TX ABOVE 1 GHz 802.11be EHT320 MODE IN THE UNII-6 BAND


2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 4x996T

HARMONICS AND SPURIOUS EMISSIONS

LOW

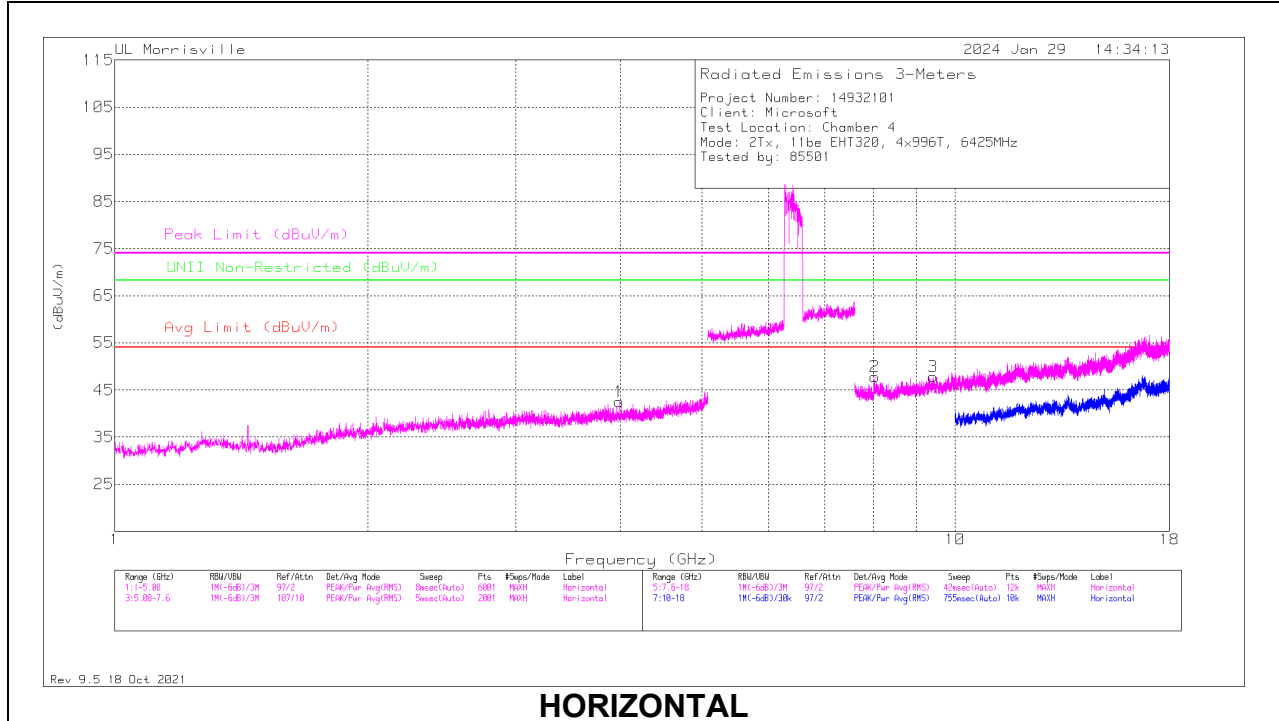

HORIZONTAL

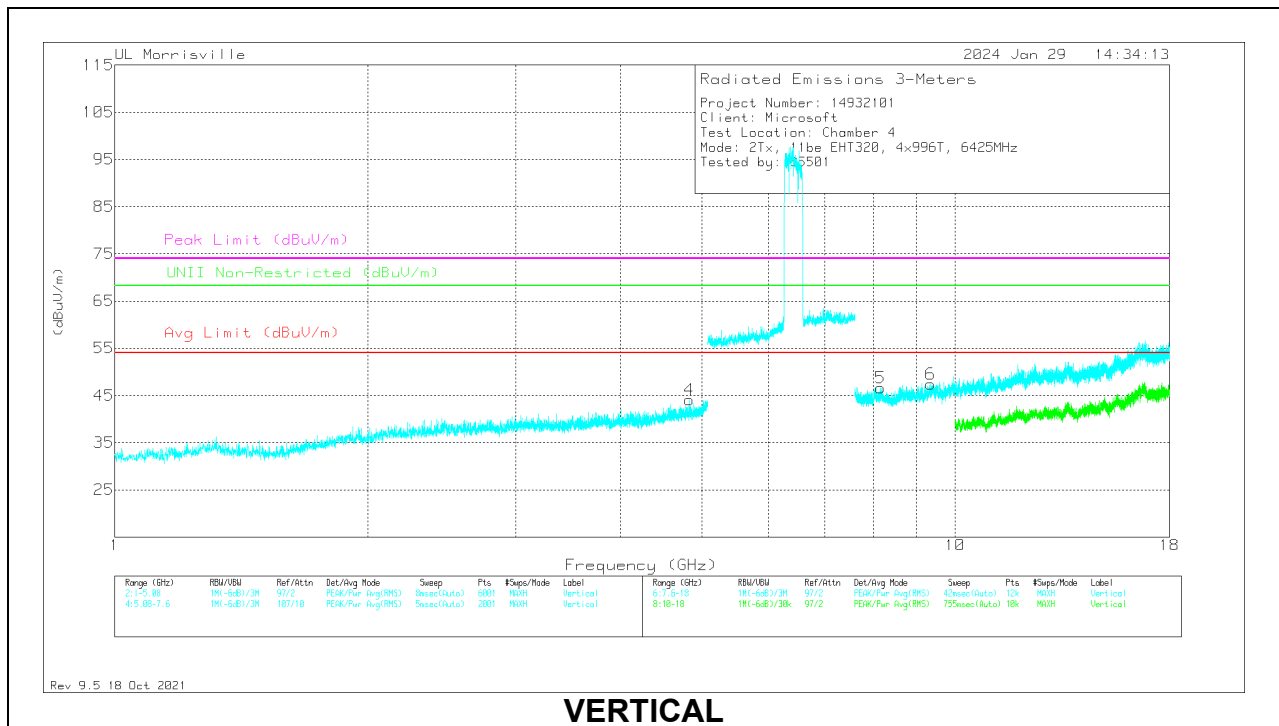


VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.98588	42	Pk	33.4	-32.9	0	42.5	54	-11.5	74	-31.5	-	-	0-360	100	H
4	* ** 4.83112	40.77	Pk	34.1	-30.8	0	44.07	54	-9.93	74	-29.93	-	-	0-360	200	V
3	* ** 9.4226	36.81	Pk	36.6	-26	.4	47.81	54	-6.19	74	-26.19	-	-	0-360	300	H
5	* ** 8.159	37.66	Pk	35.8	-27.7	.9	46.66	54	-7.34	74	-27.34	-	-	0-360	200	V
6	* ** 9.3602	36.08	Pk	36.5	-25.6	.4	47.38	54	-6.62	74	-26.62	-	-	0-360	200	V
2	8.02293	38.8	Pk	35.8	-27.7	.9	47.8	-	-	-	-	68.2	-20.4	0-360	300	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

HIGH

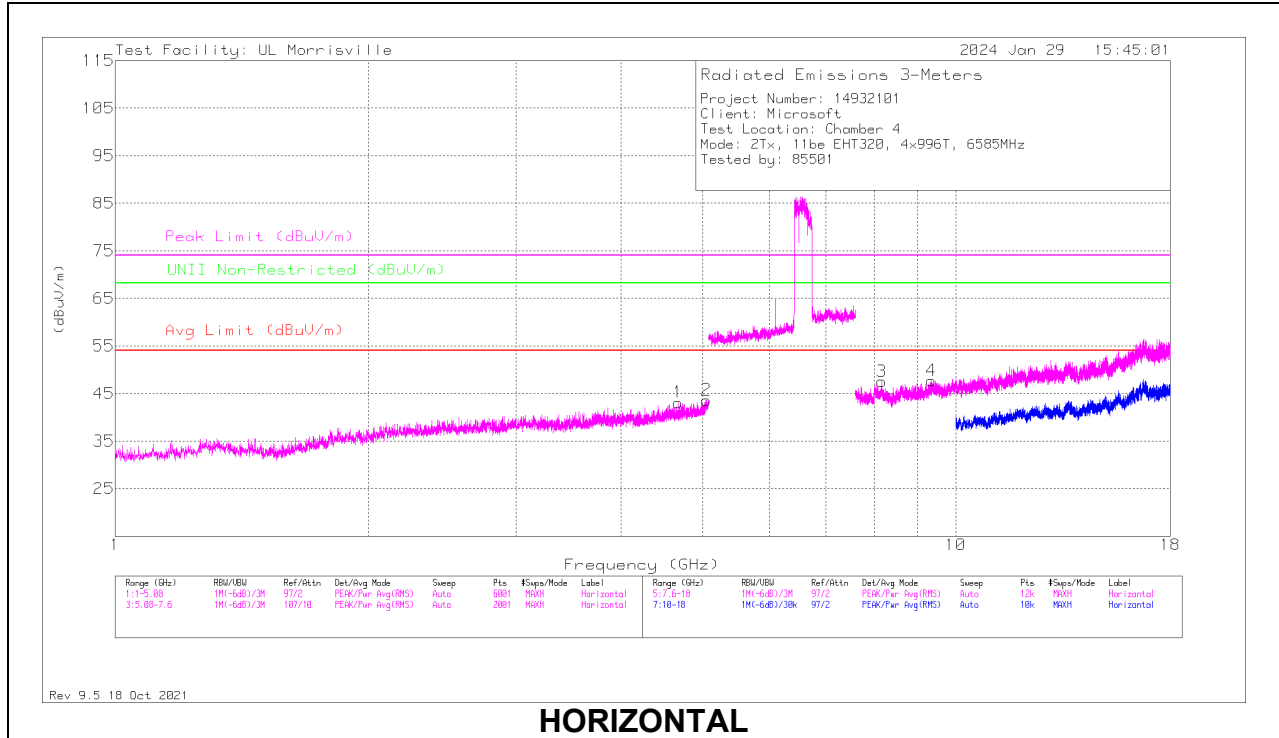

HORIZONTAL

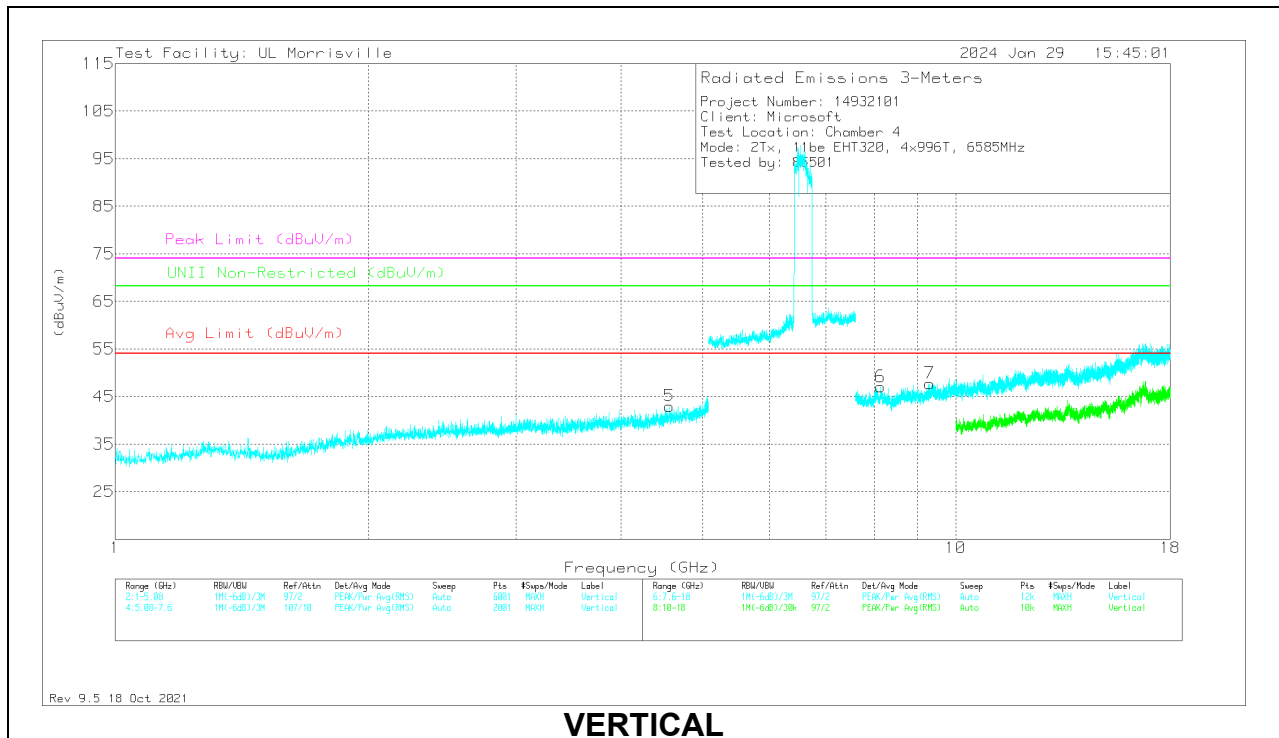

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.67676	40.01	Pk	34.1	-31	0	43.11	54	-10.89	74	-30.89	-	-	0-360	100	H
2	*** 5.05076	38.72	Pk	34.1	-29.2	0	43.62	54	-10.38	74	-30.38	-	-	0-360	100	H
5	*** 4.56184	40.19	Pk	33.9	-31.1	0	42.99	54	-11.01	74	-31.01	-	-	0-360	200	V
6	*** 8.14167	38.24	Pk	35.8	-27.8	.8	47.04	54	-6.96	74	-26.96	-	-	0-360	200	V
3	*** 8.16333	38.56	Pk	35.8	-27.7	.9	47.56	54	-6.44	74	-26.44	-	-	0-360	100	H
7	*** 9.31427	36.95	Pk	36.4	-25.9	.3	47.75	54	-6.25	74	-26.25	-	-	0-360	200	V
4	*** 9.36107	36.4	Pk	36.5	-25.6	.4	47.7	54	-6.3	74	-26.3	-	-	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band



Pk - Peak detector

11.1.9. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE UNII-7 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T

HARMONICS AND SPURIOUS EMISSIONS

LOW

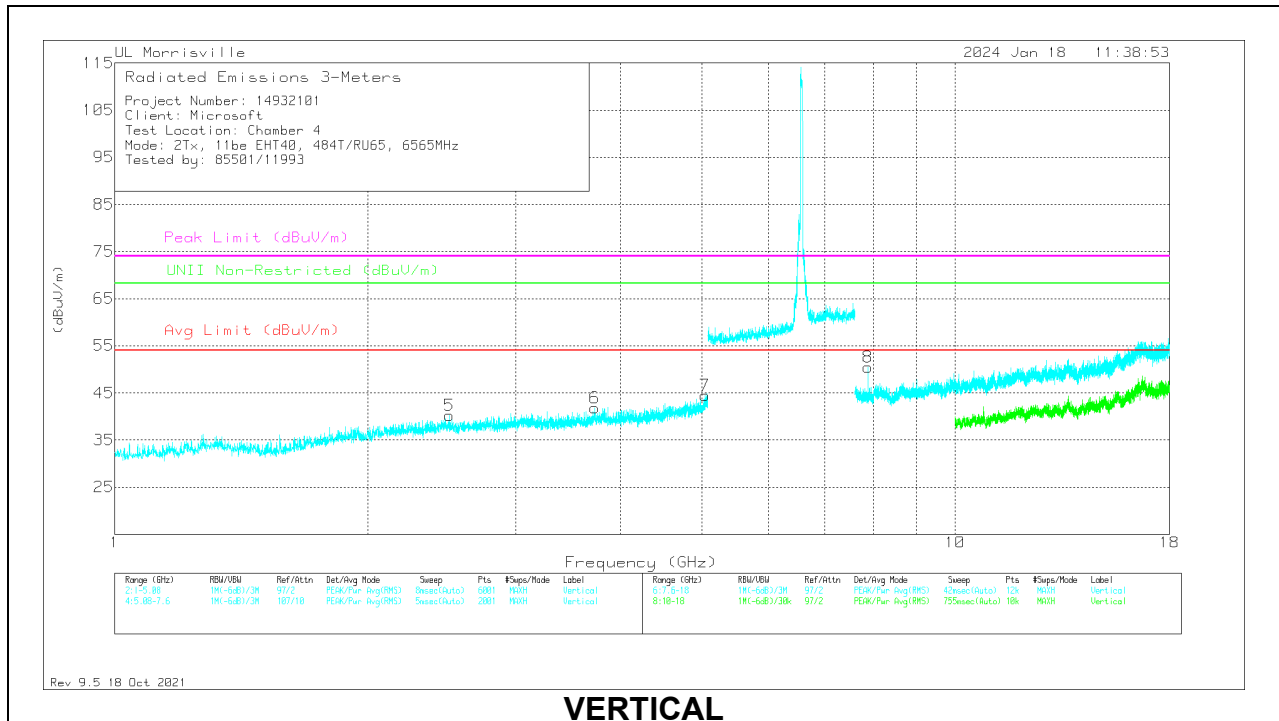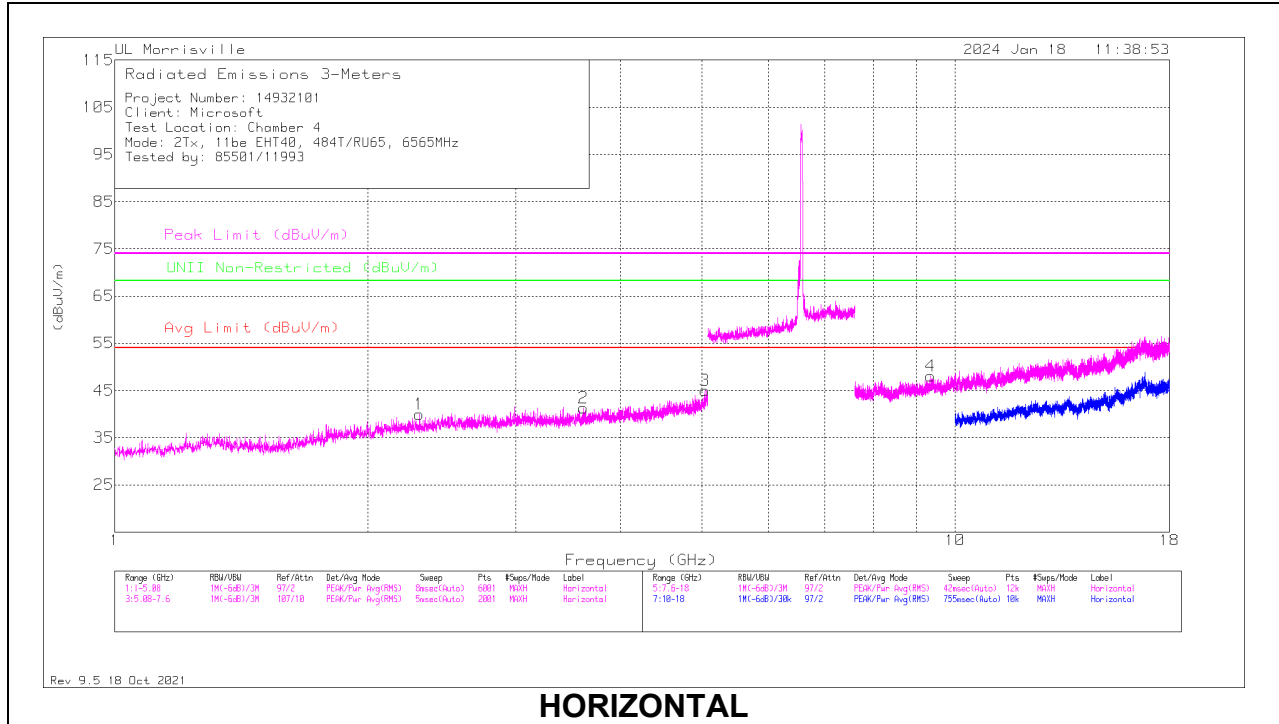

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 3.6146	41.73	Pk	32.9	-33.3	0	41.33	54	-12.67	74	-32.67	-	-	0-360	100	H
3	*** 5.04124	40.52	Pk	34.1	-29.6	0	45.02	54	-8.98	74	-28.98	-	-	0-360	100	H
5	** 2.5028	43.72	Pk	32.3	-35.8	0	40.22	54	-13.78	-	-	68.2	-27.98	0-360	200	V
6	*** 3.7268	42.33	Pk	33.1	-33.6	0	41.83	54	-12.17	74	-32.17	-	-	0-360	200	V
7	*** 5.04396	40.11	Pk	34.1	-29.7	0	44.51	54	-9.49	74	-29.49	-	-	0-360	200	V
1	2.30356	43.7	Pk	32	-35.7	0	40	-	-	-	-	68.2	-28.2	0-360	100	H
4	*** 9.36036	37.03	PK2	36.5	-25.6	.4	48.33	-	-	74	-25.67	-	-	140	397	H
	*** 9.36157	25.54	ADR	36.5	-25.6	.4	36.84	54	-17.16	-	-	-	-	140	397	H
8	7.8782	41.99	Pk	35.8	-28.1	.8	50.49	-	-	-	-	68.2	-17.71	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADR - RMS average

MID

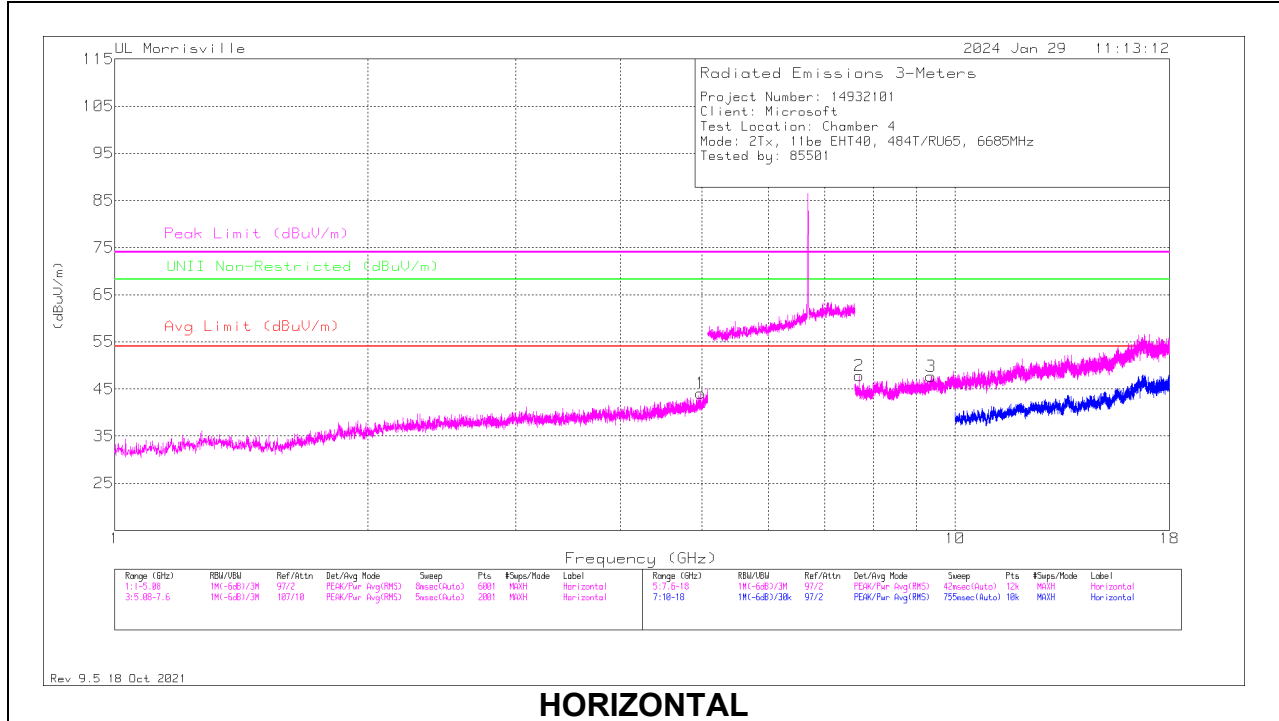

HORIZONTAL

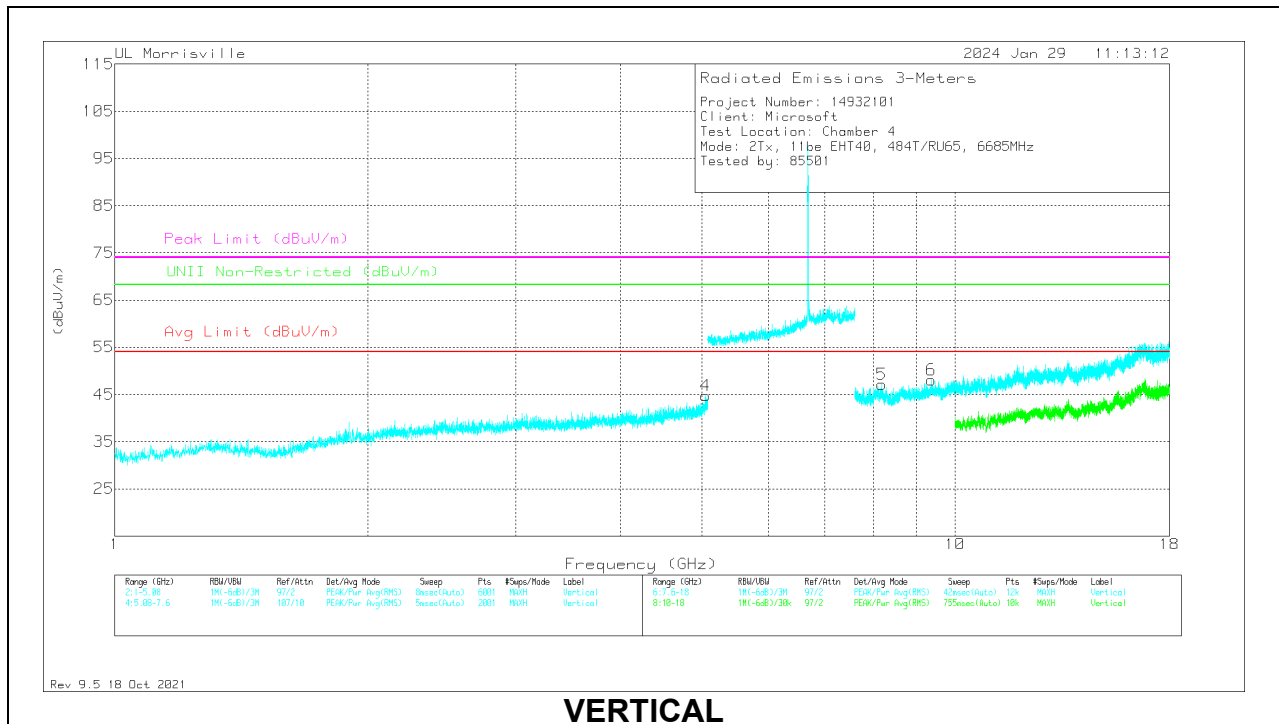

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.98412	40.43	Pk	34	-30.4	0	44.03	54	-9.97	74	-29.97	-	-	0-360	100	H
4	*** 5.05008	40	Pk	34.1	-29.3	0	44.8	54	-9.2	74	-29.2	-	-	0-360	200	V
2	*** 7.6884	39.35	Pk	35.7	-28.4	1.2	47.85	54	-6.15	74	-26.15	-	-	0-360	100	H
5	*** 8.1798	37.9	Pk	35.8	-27.5	.9	47.1	54	-6.9	74	-26.9	-	-	0-360	200	V
3	*** 9.36367	36.34	Pk	36.5	-25.6	.4	47.64	54	-6.36	74	-26.36	-	-	0-360	100	H
6	*** 9.37396	37.28	PK2	36.5	-25.9	.4	48.28	-	-	74	-25.72	-	-	175	329	V
	*** 9.3777	25.83	ADR	36.6	-25.8	.4	37.03	54	-16.97	-	-	-	-	175	329	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADR - RMS average

HIGH

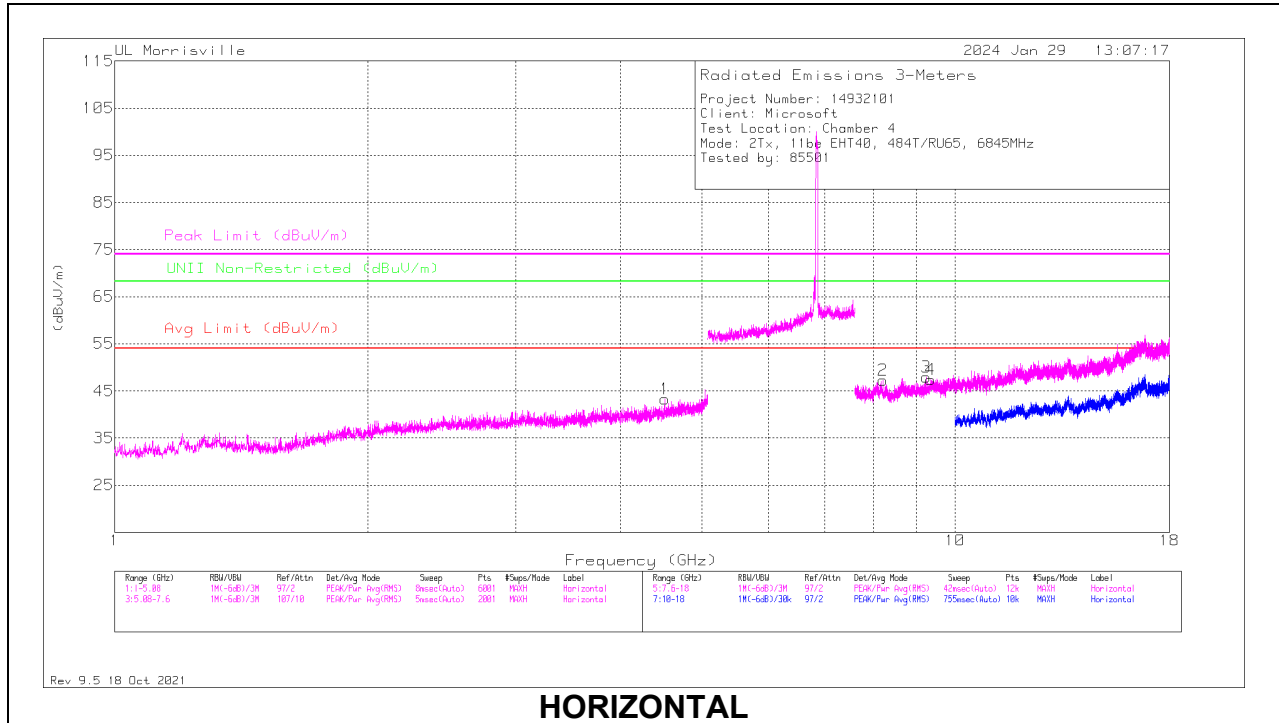

HORIZONTAL

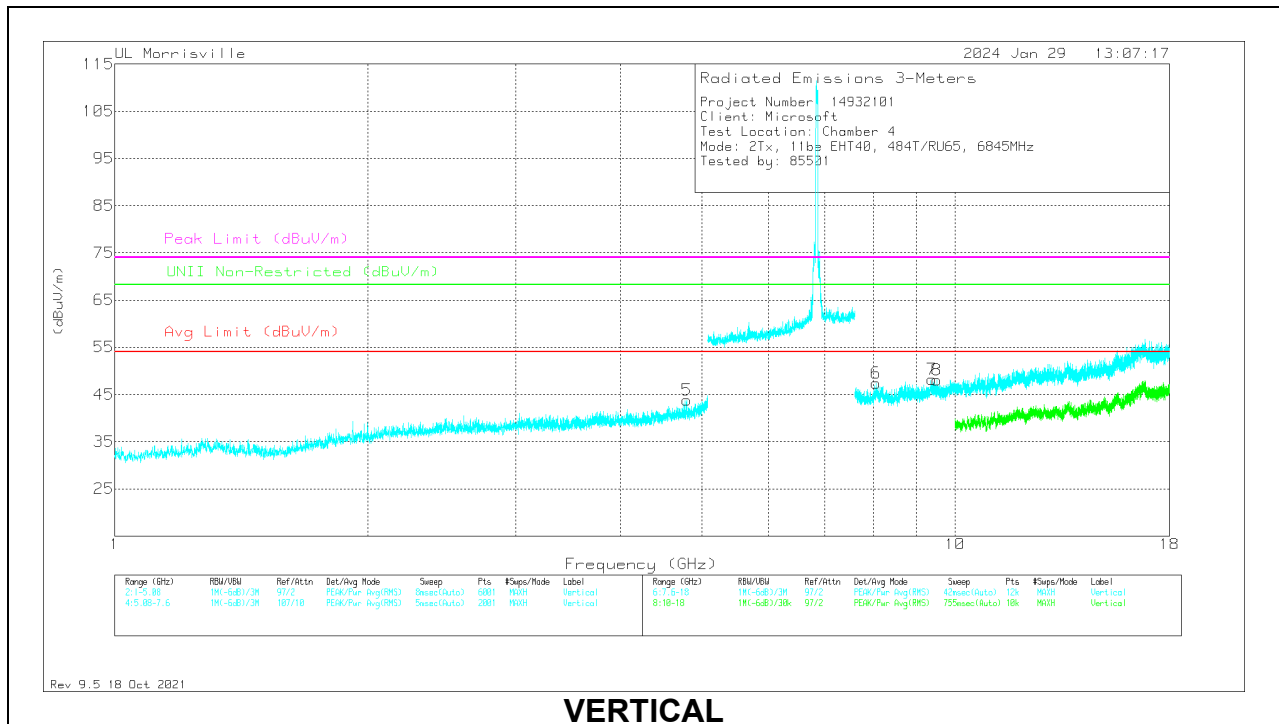

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.51288	40.87	Pk	33.8	-31.4	0	43.27	54	-10.73	74	-30.73	-	-	0-360	100	H
5	*** 4.79508	40.26	Pk	34.1	-30.5	0	43.86	54	-10.14	74	-30.14	-	-	0-360	200	V
6	*** 8.05933	38.55	Pk	35.8	-27.8	.9	47.45	54	-6.55	74	-26.55	-	-	0-360	200	V
2	*** 8.20493	38.15	Pk	35.8	-27.5	.8	47.25	54	-6.75	74	-26.75	-	-	0-360	100	H
4	*** 9.35847	36.25	Pk	36.5	-25.7	.4	47.45	54	-6.55	74	-26.55	-	-	0-360	100	H
7	*** 9.3809	37.42	PK2	36.6	-25.7	.5	48.82	-	-	74	-25.18	-	-	211	312	V
	*** 9.38376	25.81	ADR	36.6	-25.8	.4	37.01	54	-16.99	-	-	-	-	211	312	V
3	9.24927	37.19	Pk	36.4	-26.1	.4	47.89	-	-	-	-	68.2	-20.31	0-360	100	H
8	9.52487	36.62	Pk	36.7	-25.8	.5	48.02	-	-	-	-	68.2	-20.18	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADR - RMS average

11.1.10. TX ABOVE 1 GHz 802.11a MODE IN THE UNII-8 BAND

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

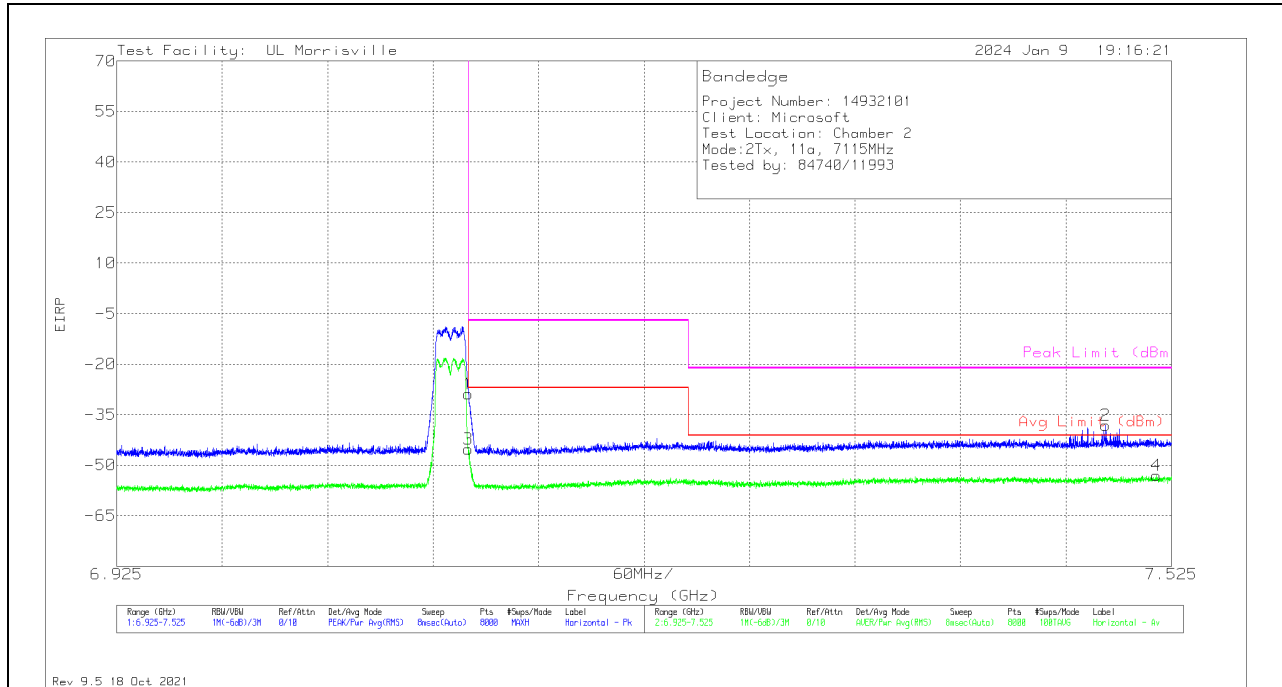

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48772	-69.23	Pk	35.7	-16.5	11.8	-38.23	-	-	-21.2	-17.03	69	103	H
4	*** 7.5163	-84.02	RMS	35.7	-16.6	11.8	-53.12	-41.2	-11.92	-	-	69	103	H
1	7.12505	-57.22	Pk	35.6	-19	11.8	-28.82	-	-	-7	-21.82	69	103	H
3	7.12505	-73.59	RMS	35.6	-19	11.8	-45.19	-27	-18.19	-	-	69	103	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

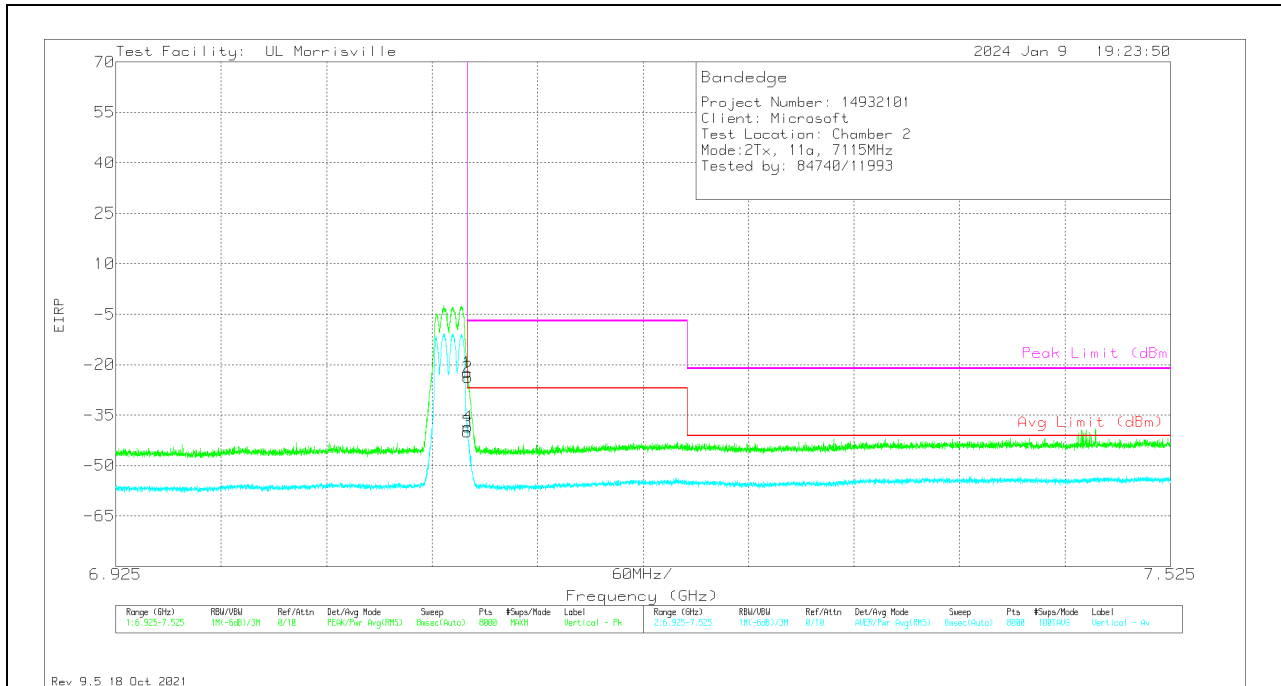

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.12505	-50.77	Pk	35.6	-19	11.8	-22.37	-	-	-7	-15.37	192	102	V
3	7.12505	-68.45	RMS	35.6	-19	11.8	-40.05	-27	-13.05	-	-	192	102	V
4	7.1252	-66.92	RMS	35.6	-19	11.8	-38.52	-27	-11.52	-	-	192	102	V
2	7.12527	-52.17	PK	35.6	-19	11.8	-23.77	-	-	-7	-16.77	192	102	V


Pk - Peak detector
 RMS - RMS detection

11.1.11. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE UNII-8 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 26T

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

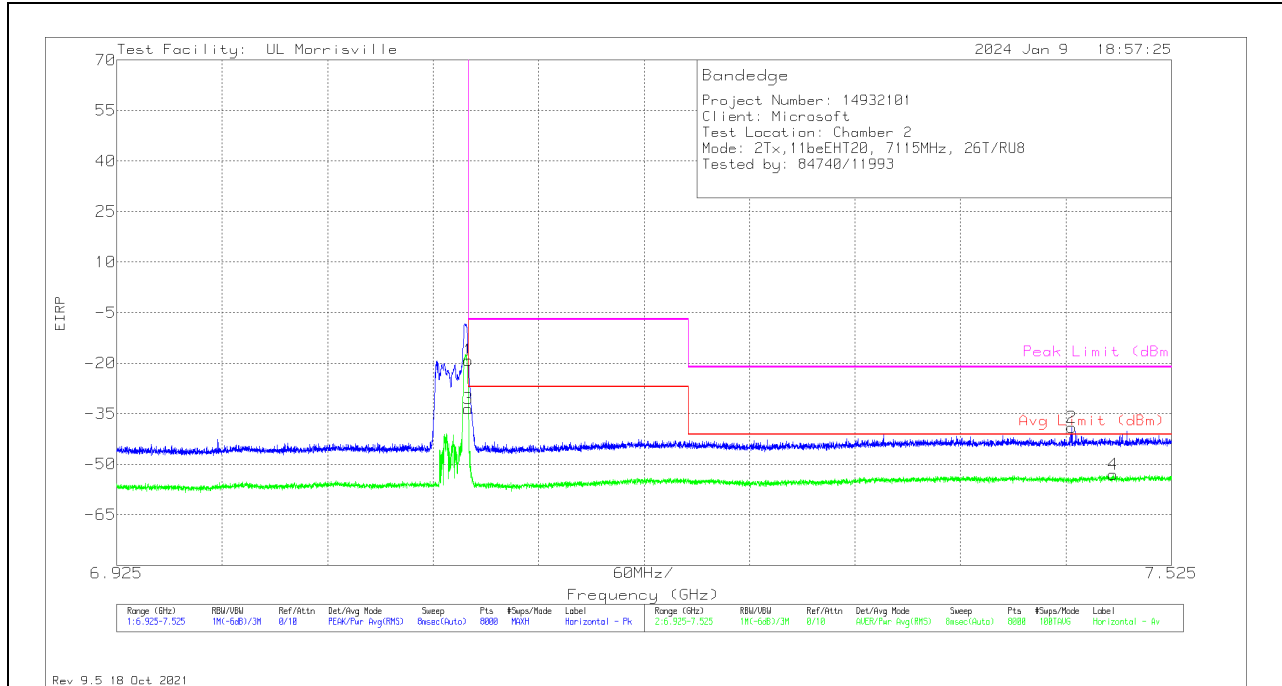

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.46822	-69.37	Pk	35.6	-17.1	11.8	-39.07	-	-	-21.2	-17.87	69	105	H
4	*** 7.49199	-84	RMS	35.7	-16.6	11.8	-53.1	-41.2	-11.9	-	-	69	105	H
1	7.12505	-47.53	Pk	35.6	-19	11.8	-19.13	-	-	-7	-12.13	69	105	H
3	7.12505	-61.97	RMS	35.6	-19	11.8	-33.57	-27	-6.57	-	-	69	105	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

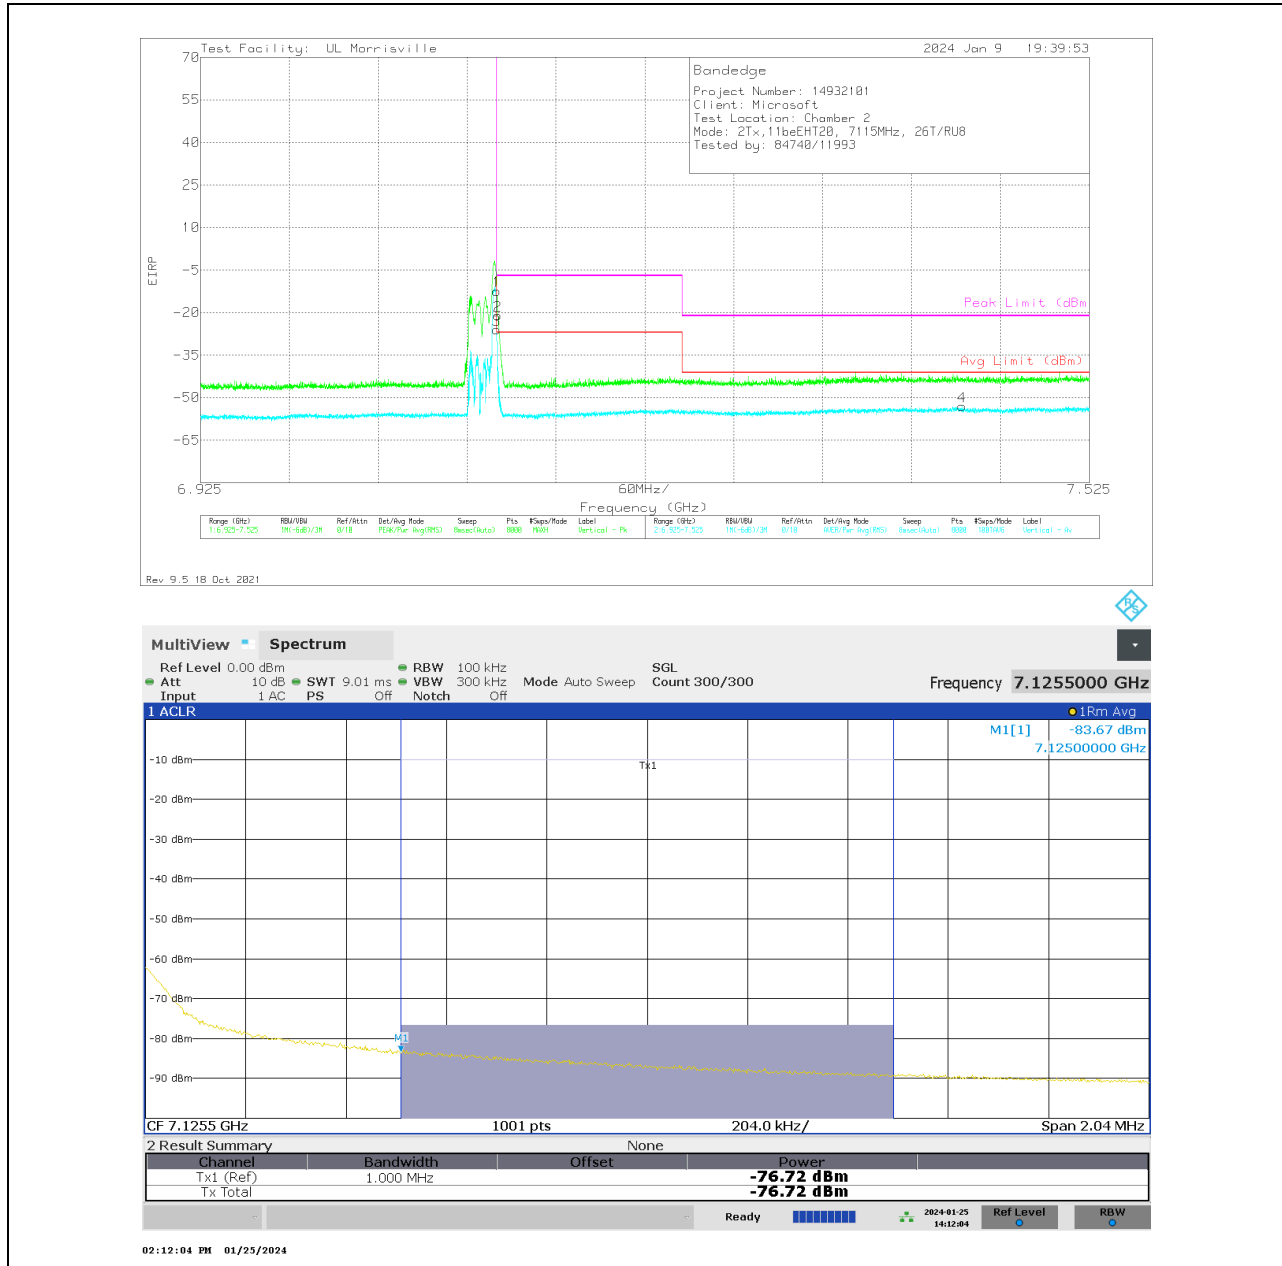


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	*** 7.43904	-83.71	RMS	35.6	-16.8	11.8	-53.11	-41.2	-11.91	-	-	247	148	V
1	7.12505	-40.76	Pk	35.6	-19	11.8	-12.36	-	-	-7	-5.36	247	148	V
3	7.12505	-76.72	RMS	35.6	-19	11.8	-48.32	-27	-21.32	-	-	247	148	V
2	7.1258	-49.45	Pk	35.6	-18.9	11.8	-20.95	-	-	-7	-13.95	247	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 52T

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

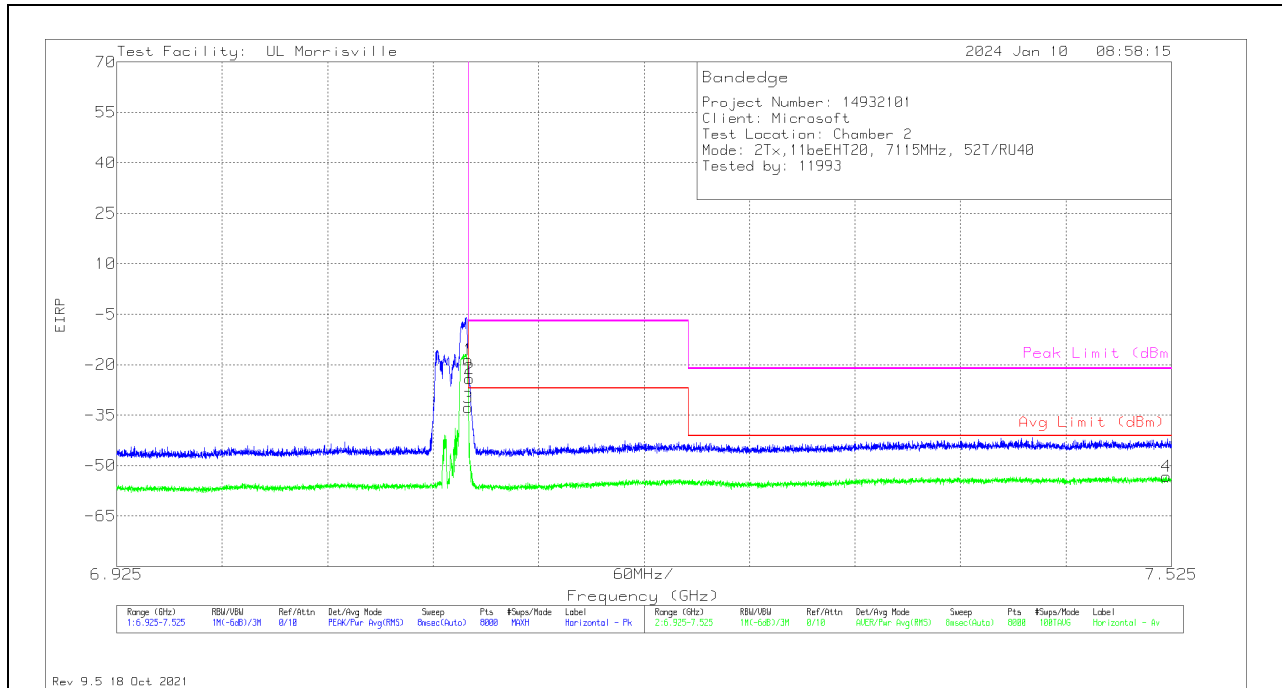

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* ** 7.522	-84.09	RMS	35.7	-16.6	11.8	-53.19	-41.2	-11.99	-	-	310	389	H
1	7.12505	-46.93	Pk	35.6	-19	11.8	-18.53	-	-	-7	-11.53	310	389	H
3	7.12505	-61.2	RMS	35.6	-19	11.8	-32.8	-27	-5.8	-	-	310	389	H
2	7.12572	-52.65	Pk	35.6	-18.9	11.8	-24.15	-	-	-7	-17.15	310	389	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

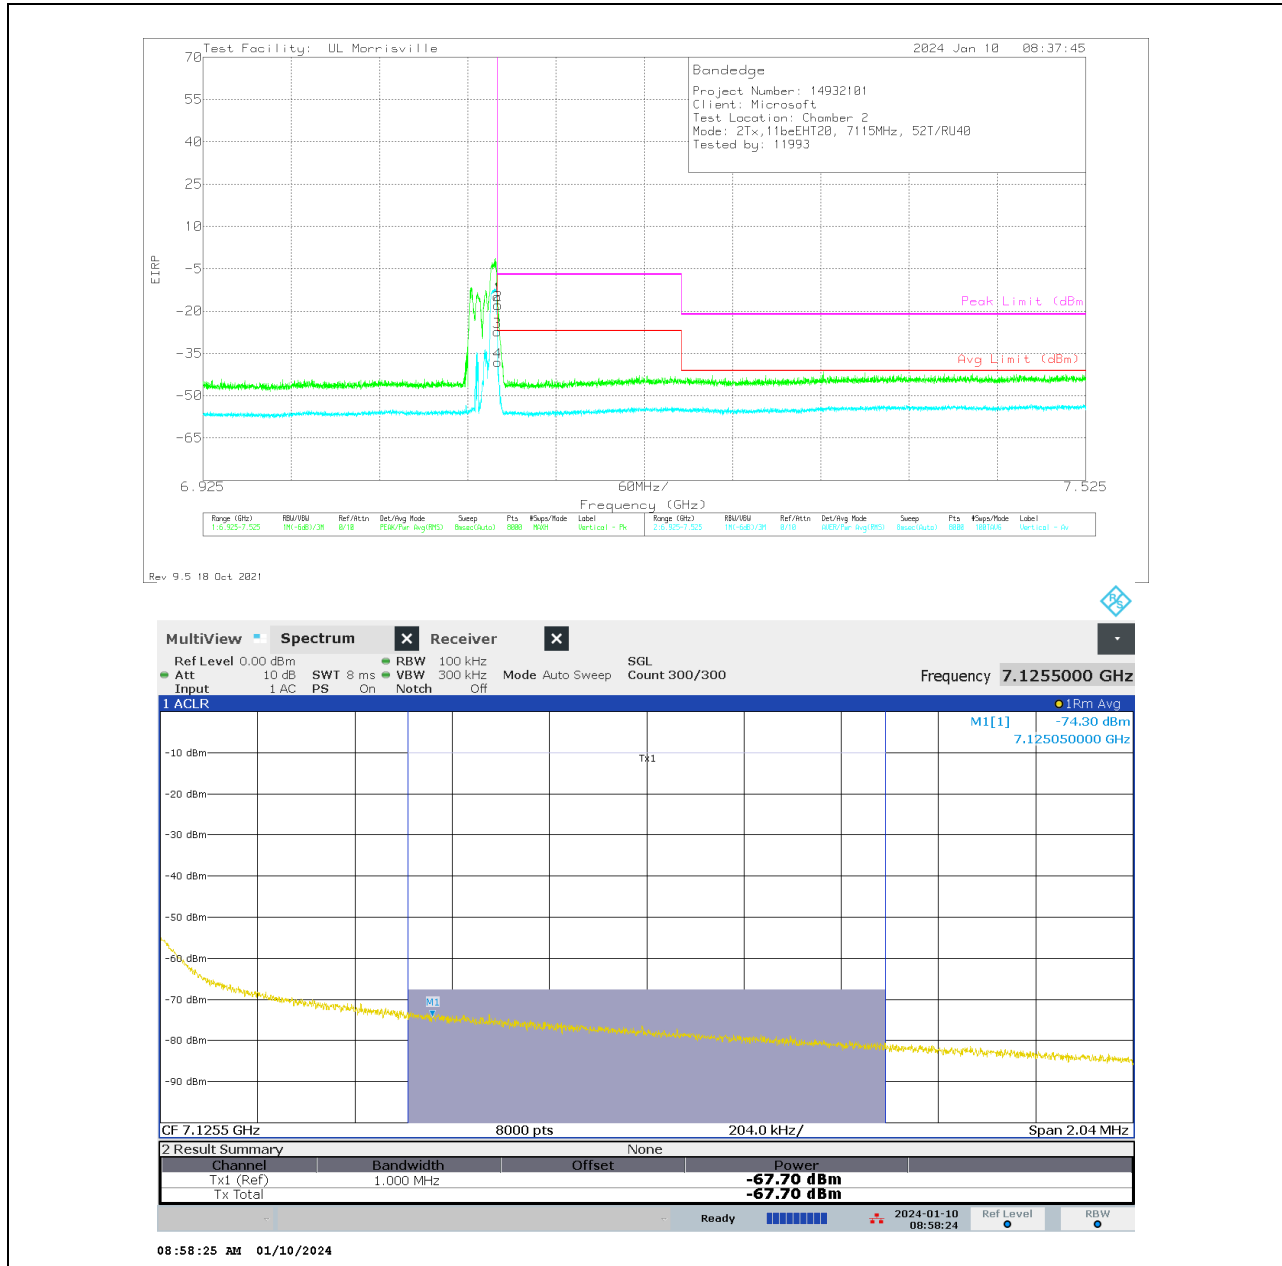


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.12505	-43.26	Pk	35.6	-19	11.8	-14.86	-	-	-7	-7.86	0	135	V
3	7.12505	-67.7	RMS	35.6	-19	11.8	-39.3	-27	-12.3	-	-	0	135	V
4	7.12542	-66.61	RMS	35.6	-19	11.8	-38.21	-27	-11.21	-	-	0	135	V
2	7.1255	-46.44	Pk	35.6	-18.9	11.8	-17.94	-	-	-7	-10.94	0	135	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 52T+26T

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

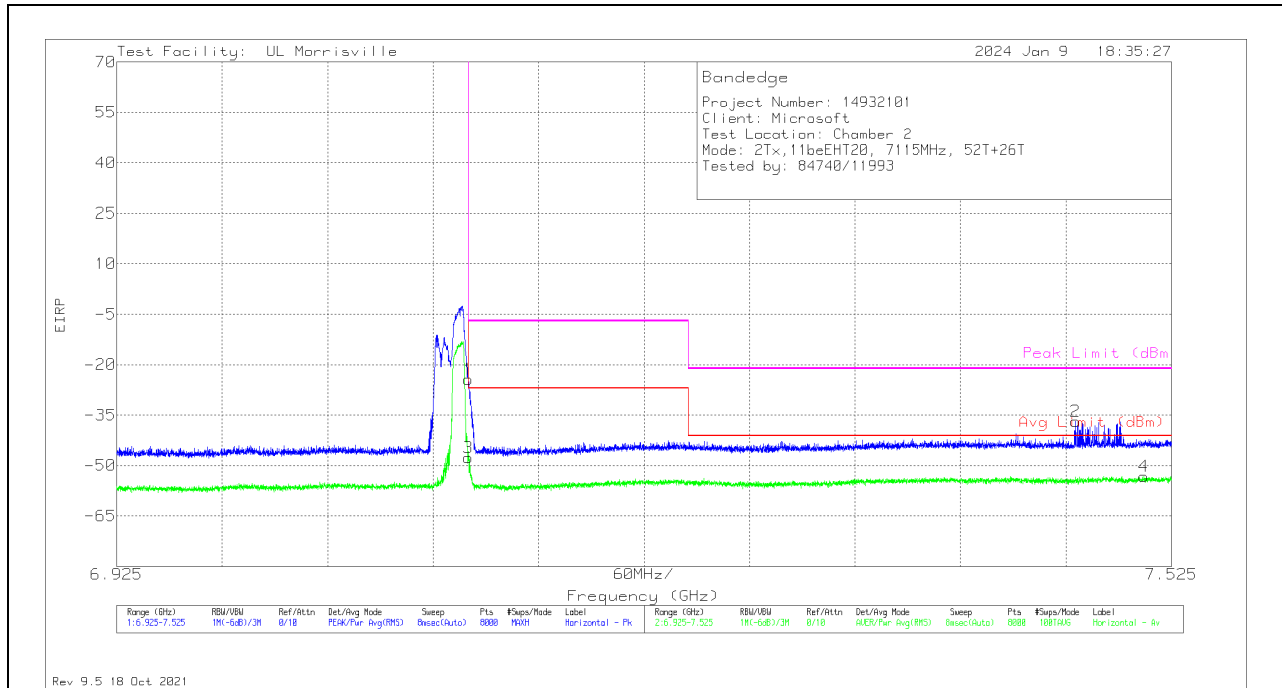

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.47039	-67.24	Pk	35.6	-17	11.8	-36.84	-	-	-21.2	-15.64	327	392	H
4	*** 7.5094	-84.3	RMS	35.7	-16.4	11.8	-53.2	-41.2	-12	-	-	327	392	H
1	7.12505	-52.84	Pk	35.6	-19	11.8	-24.44	-	-	-7	-17.44	327	392	H
3	7.12505	-76	RMS	35.6	-19	11.8	-47.6	-27	-20.6	-	-	327	392	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

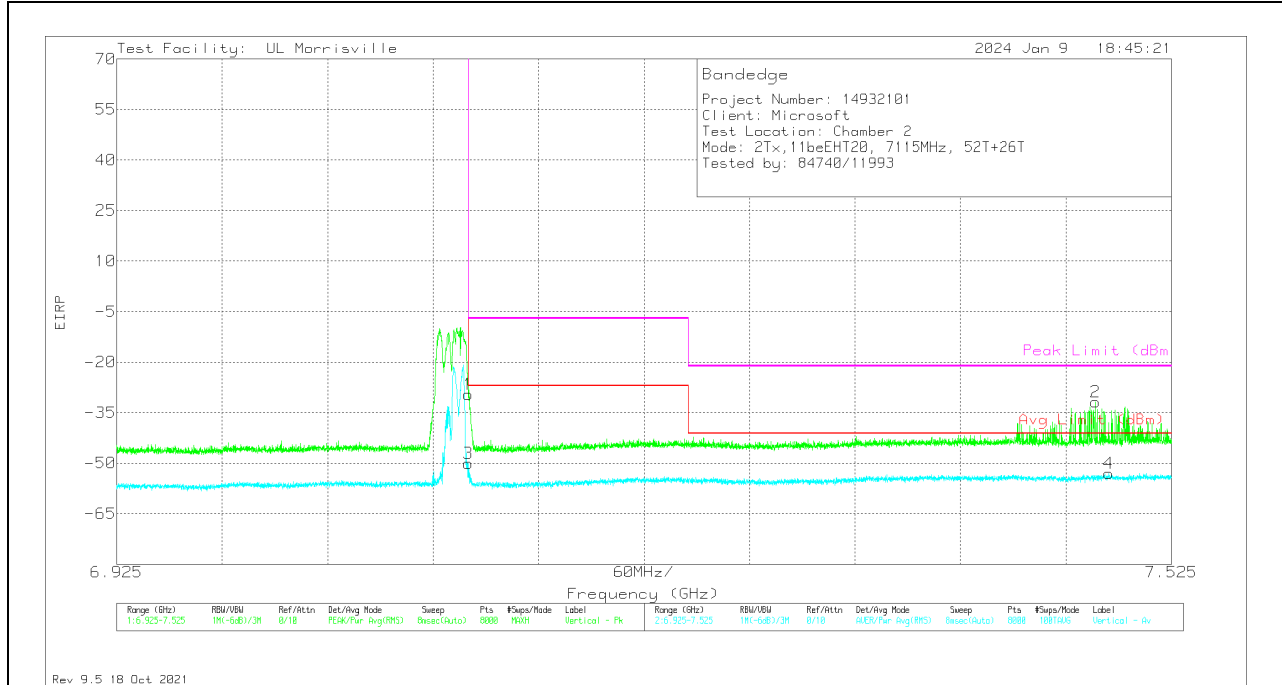


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48202	-62.7	Pk	35.7	-16.6	11.8	-31.8	-	-	-21.2	-10.6	62	127	V
4	*** 7.48929	-84.03	RMS	35.7	-16.5	11.8	-53.03	-41.2	-11.83	-	-	62	126	V
1	7.12505	-57.9	Pk	35.6	-19	11.8	-29.5	-	-	-7	-22.5	62	127	V
3	7.12505	-78.44	RMS	35.6	-19	11.8	-50.04	-27	-23.04	-	-	62	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 106T

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

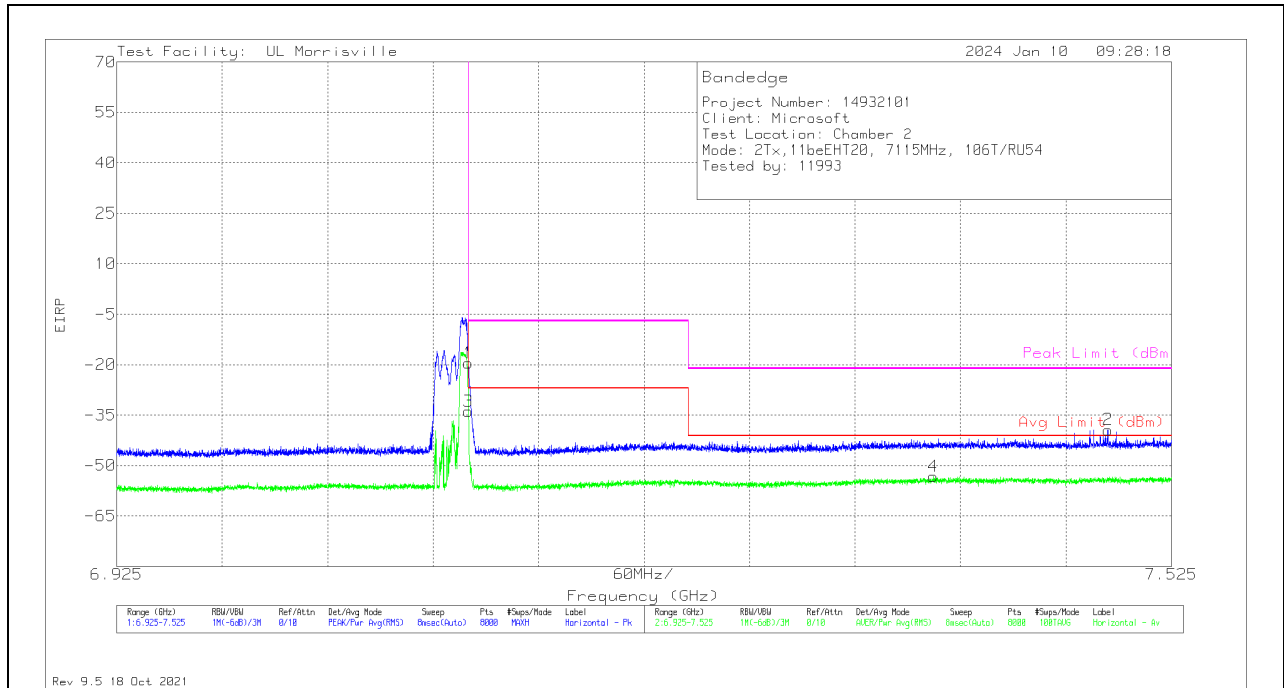

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48884	-70.36	Pk	35.7	-16.5	11.8	-39.36	-	-	-21.2	-18.16	63	111	H
4	*** 7.38961	-83.57	RMS	35.6	-17.1	11.8	-53.27	-41.2	-12.07	-	-	63	111	H
1	7.12505	-47.92	Pk	35.6	-19	11.8	-19.52	-	-	-7	-12.52	63	111	H
3	7.12505	-62.28	RMS	35.6	-19	11.8	-33.88	-27	-6.88	-	-	63	111	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

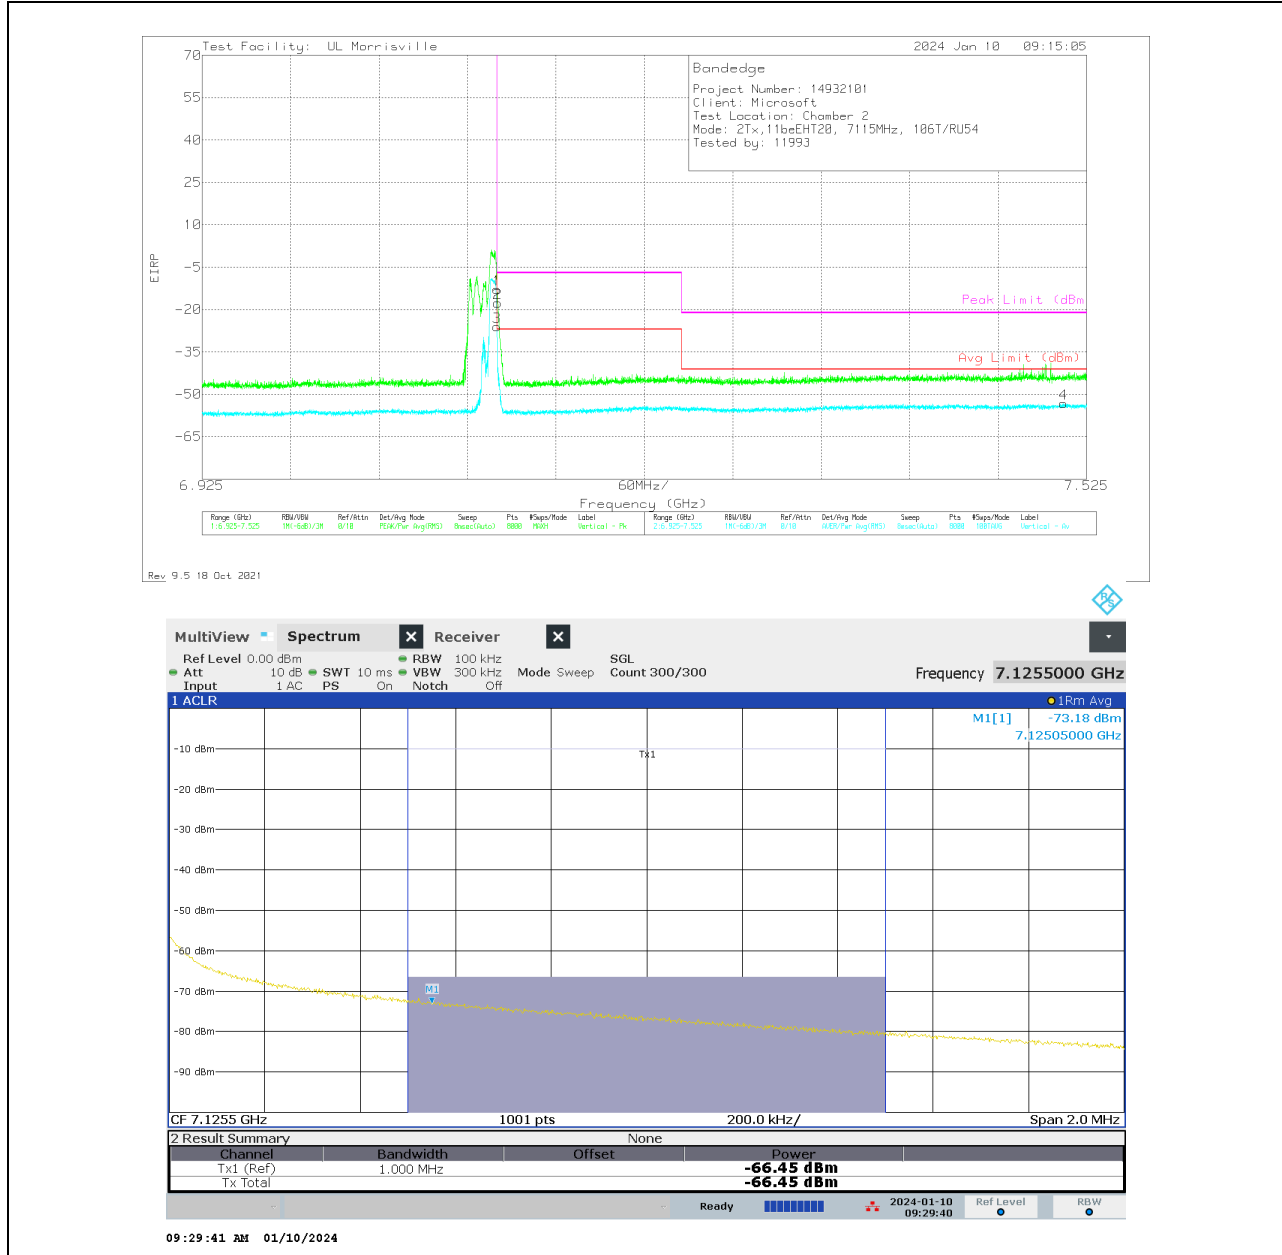

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	*** 7.50947	-84.3	RMS	35.7	-16.4	11.8	-53.2	-41.2	-12	-	-	86	120	V
1	7.12505	-41.28	Pk	35.6	-19	11.8	-12.88	-	-	-7	-5.88	86	120	V
3	7.12505	-66.45	RMS	35.6	-19	11.8	-38.05	-27	-11.05	-	-	86	120	V
2	7.1255	-46.11	Pk	35.6	-18.9	11.8	-17.61	-	-	-7	-10.61	86	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 106T+26T

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

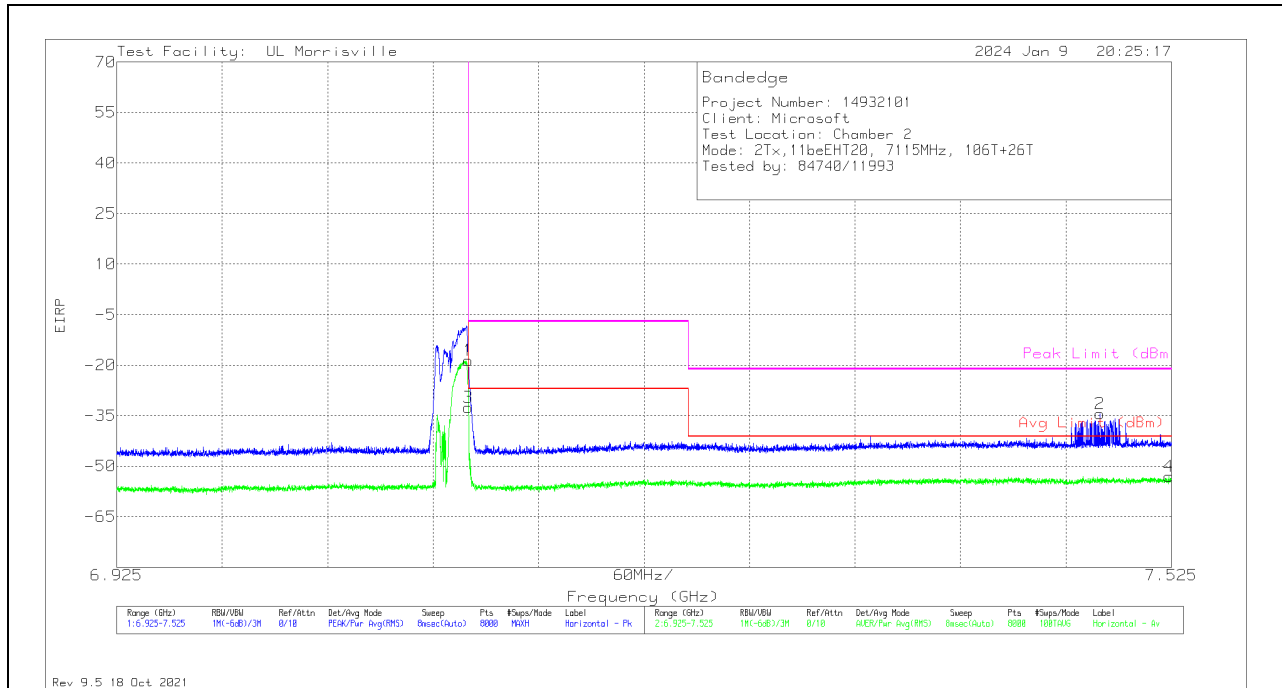

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48434	-65.34	Pk	35.7	-16.6	11.8	-34.44	-	-	-21.2	-13.24	344	240	H
4	*** 7.52365	-83.98	RMS	35.7	-16.5	11.8	-52.98	-41.2	-11.78	-	-	344	240	H
1	7.12505	-47.06	Pk	35.6	-19	11.8	-18.66	-	-	-7	-11.66	344	240	H
3	7.12505	-60.95	RMS	35.6	-19	11.8	-32.55	-27	-5.55	-	-	344	240	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

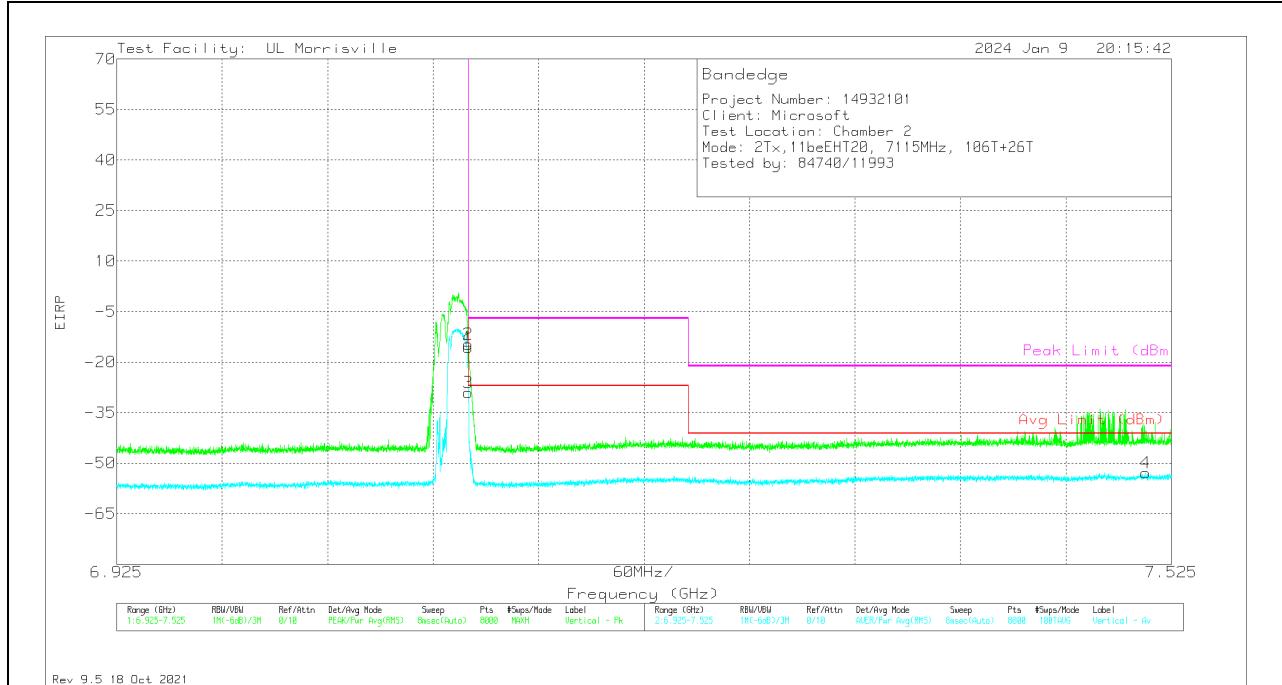

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* ** 7.5103	-83.95	RMS	35.7	-16.4	11.8	-52.85	-41.2	-11.65	-	-	45	209	V
1	7.12505	-43.98	Pk	35.6	-19	11.8	-15.58	-	-	-7	-8.58	45	209	V
3	7.12505	-57.36	RMS	35.6	-19	11.8	-28.96	-27	-1.96	-	-	45	209	V
2	7.12512	-43.12	Pk	35.6	-19	11.8	-14.72	-	-	-7	-7.72	45	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 242T

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

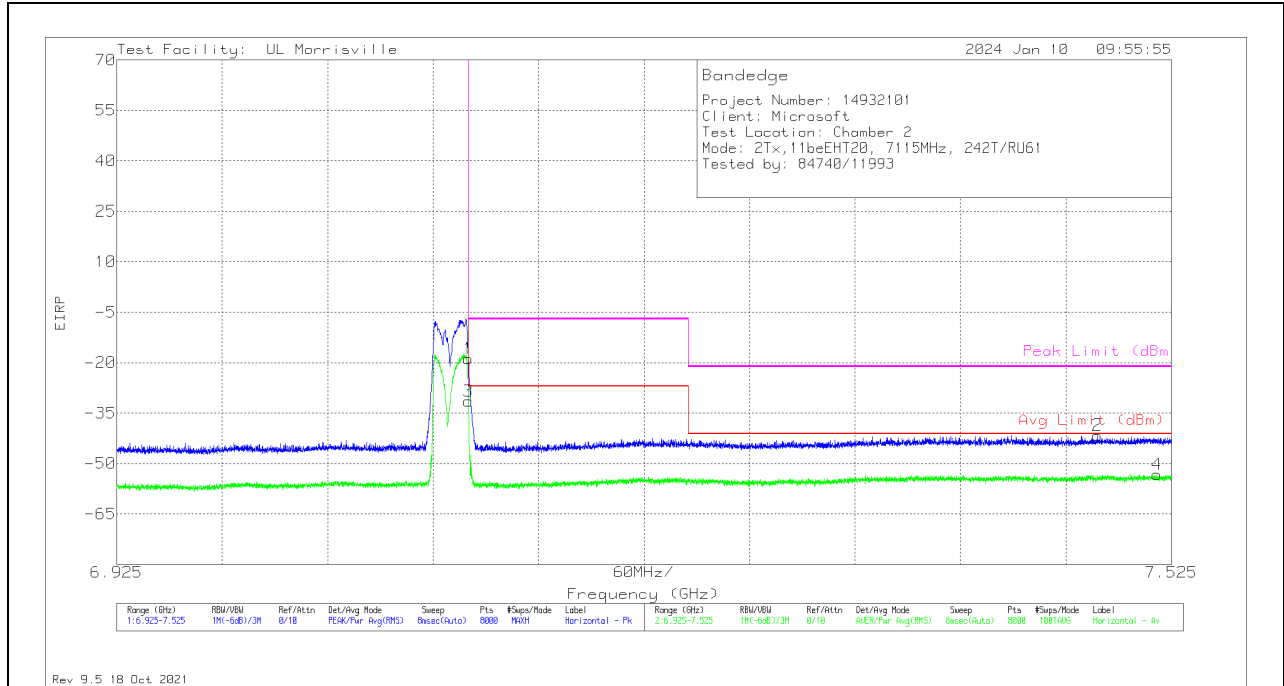

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48292	-72.5	Pk	35.7	-16.6	11.8	-41.6	-	-	-21.2	-20.4	284	394	H
4	*** 7.51675	-84.15	RMS	35.7	-16.6	11.8	-53.25	-41.2	-12.05	-	-	284	394	H
1	7.12505	-47.11	Pk	35.6	-19	11.8	-18.71	-	-	-7	-11.71	284	394	H
3	7.12505	-59.88	RMS	35.6	-19	11.8	-31.48	-27	-4.48	-	-	284	394	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

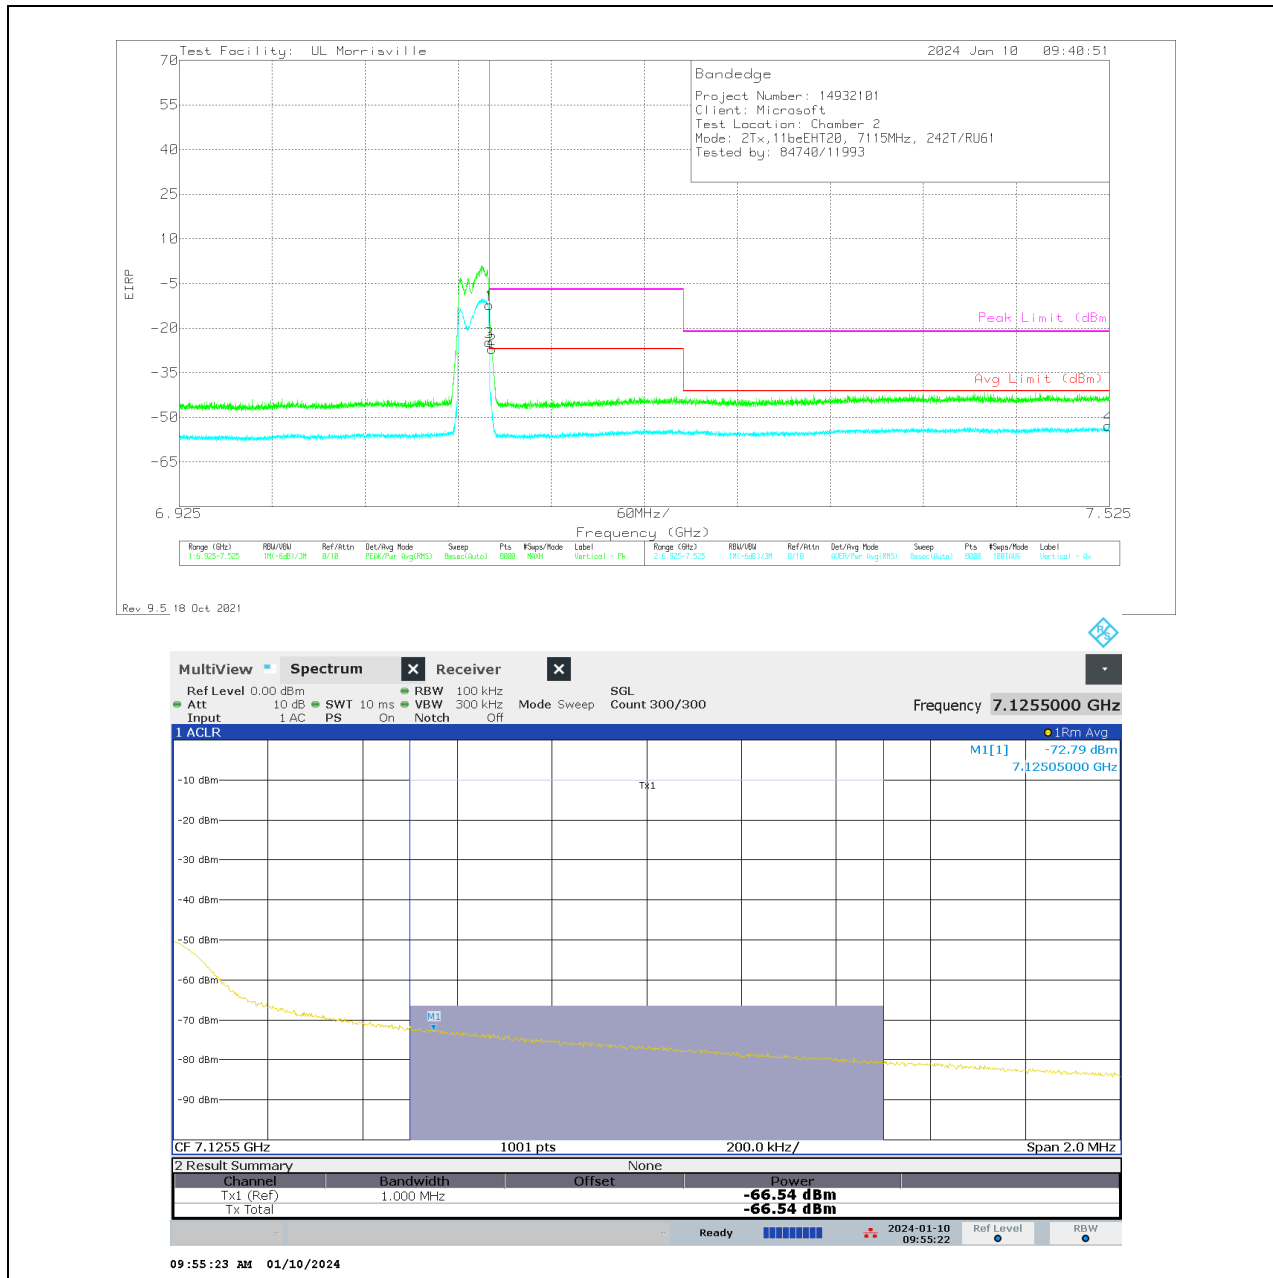

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* ** 7.5244	-83.95	RMS	35.7	-16.5	11.8	-52.95	-41.2	-11.75	-	-	0	218	V
1	7.12505	-40.59	Pk	35.6	-19	11.8	-12.19	-	-	-7	-5.19	0	218	V
3	7.12505	-66.54	RMS	35.6	-19	11.8	-38.14	-27	-11.14	-	-	0	218	V
2	7.1267	-55.52	Pk	35.6	-18.9	11.8	-27.02	-	-	-7	-20.02	0	218	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

11.1.12. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE UNII-8 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

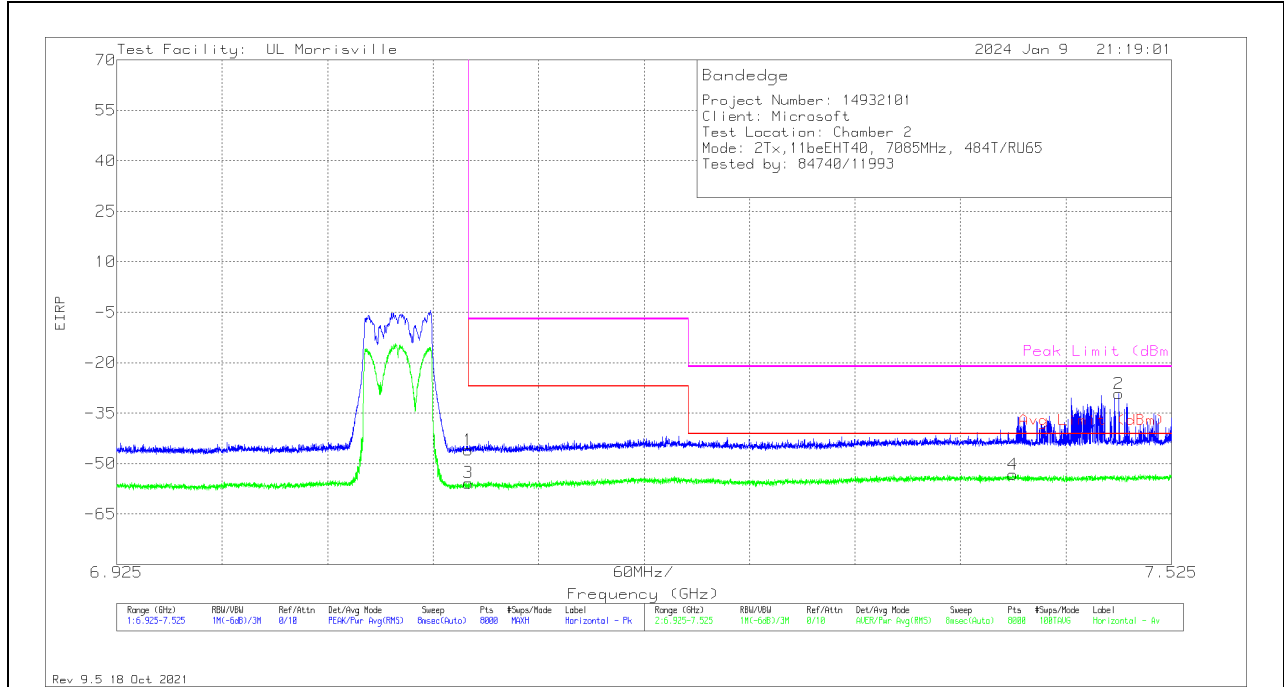

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.49499	-60.03	Pk	35.7	-16.7	11.8	-29.23	-	-	-21.2	-8.03	92	379	H
4	*** 7.43469	-83.91	RMS	35.6	-16.7	11.8	-53.21	-41.2	-12.01	-	-	92	378	H
1	7.12505	-74.41	Pk	35.6	-19	11.8	-46.01	-	-	-7	-39.01	92	379	H
3	7.12505	-84.15	RMS	35.6	-19	11.8	-55.75	-27	-28.75	-	-	92	378	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

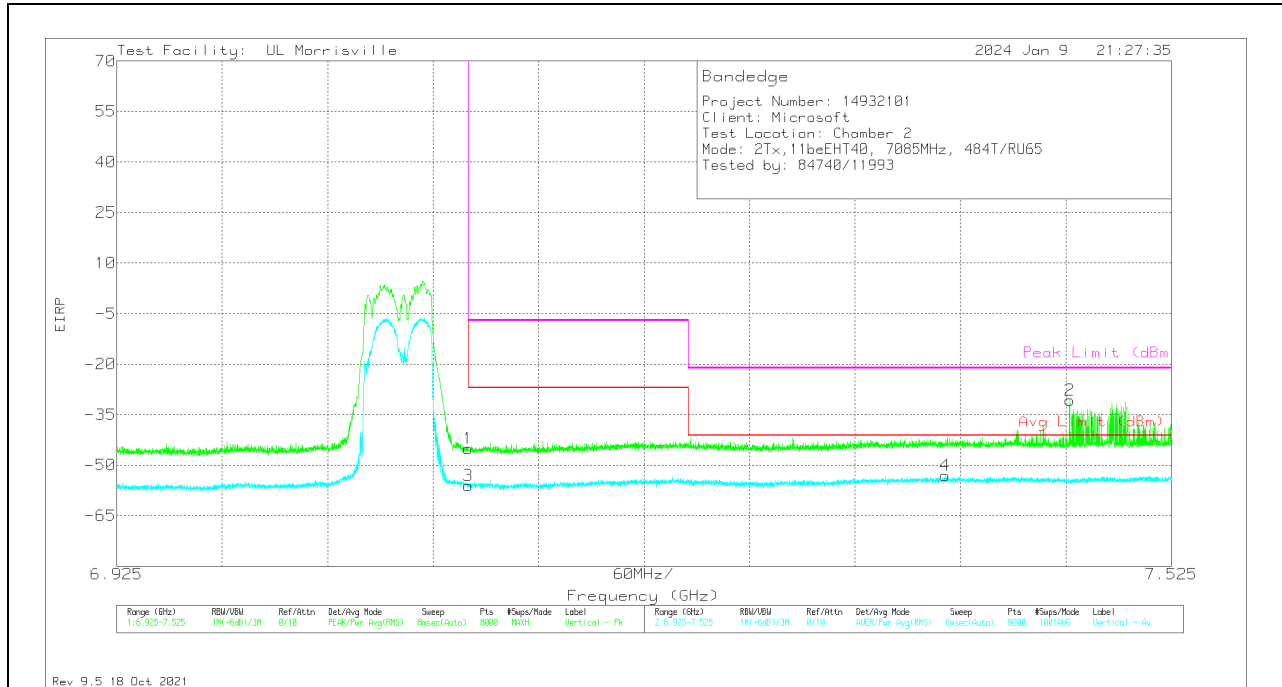

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.46717	-60.94	Pk	35.6	-17.1	11.8	-30.64	-	-	-21.2	-9.44	52	221	V
4	*** 7.39636	-83.3	RMS	35.6	-17.1	11.8	-53	-41.2	-11.8	-	-	52	221	V
1	7.12505	-73.42	Pk	35.6	-19	11.8	-45.02	-	-	-7	-38.02	52	221	V
3	7.12505	-84.42	RMS	35.6	-19	11.8	-56.02	-27	-29.02	-	-	52	221	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


RMS - RMS detection

11.1.13. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE UNII-8 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+242T (CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

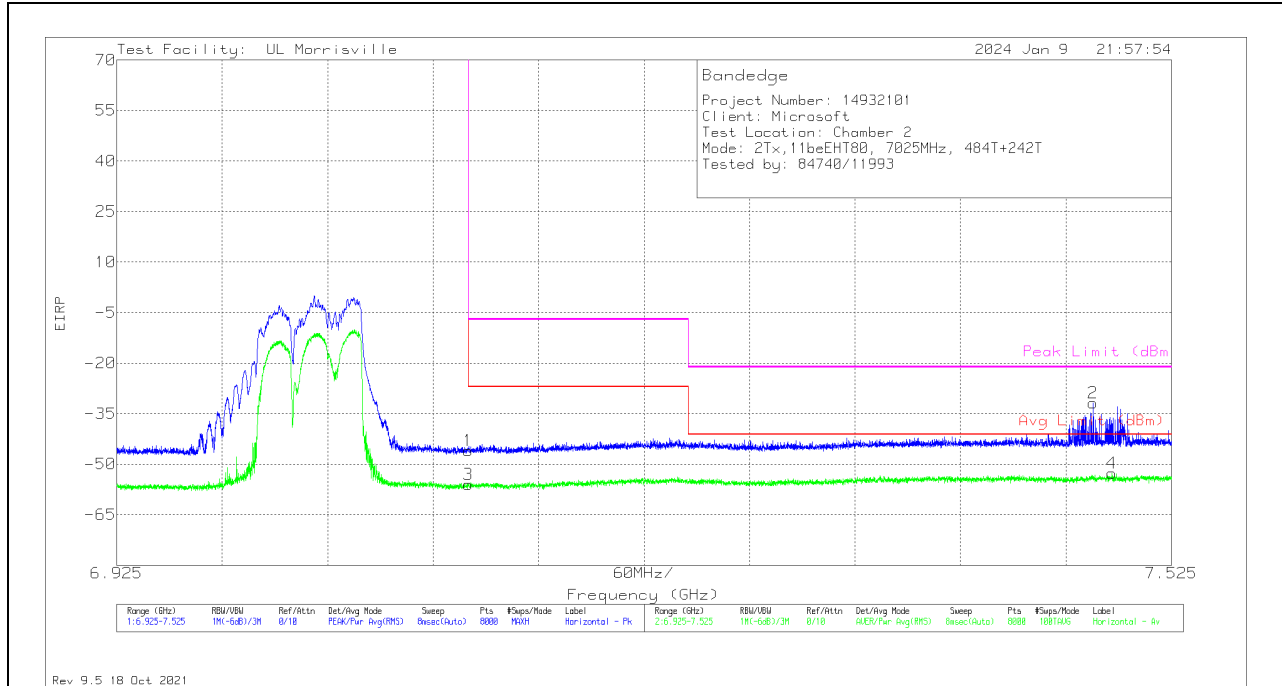

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48052	-62.69	Pk	35.7	-16.6	11.8	-31.79	-	-	-21.2	-10.59	332	287	H
4	*** 7.49124	-83.59	RMS	35.7	-16.6	11.8	-52.69	-41.2	-11.49	-	-	332	287	H
1	7.12505	-74.29	Pk	35.6	-19	11.8	-45.89	-	-	-7	-38.89	332	287	H
3	7.12505	-84.41	RMS	35.6	-19	11.8	-56.01	-27	-29.01	-	-	332	287	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

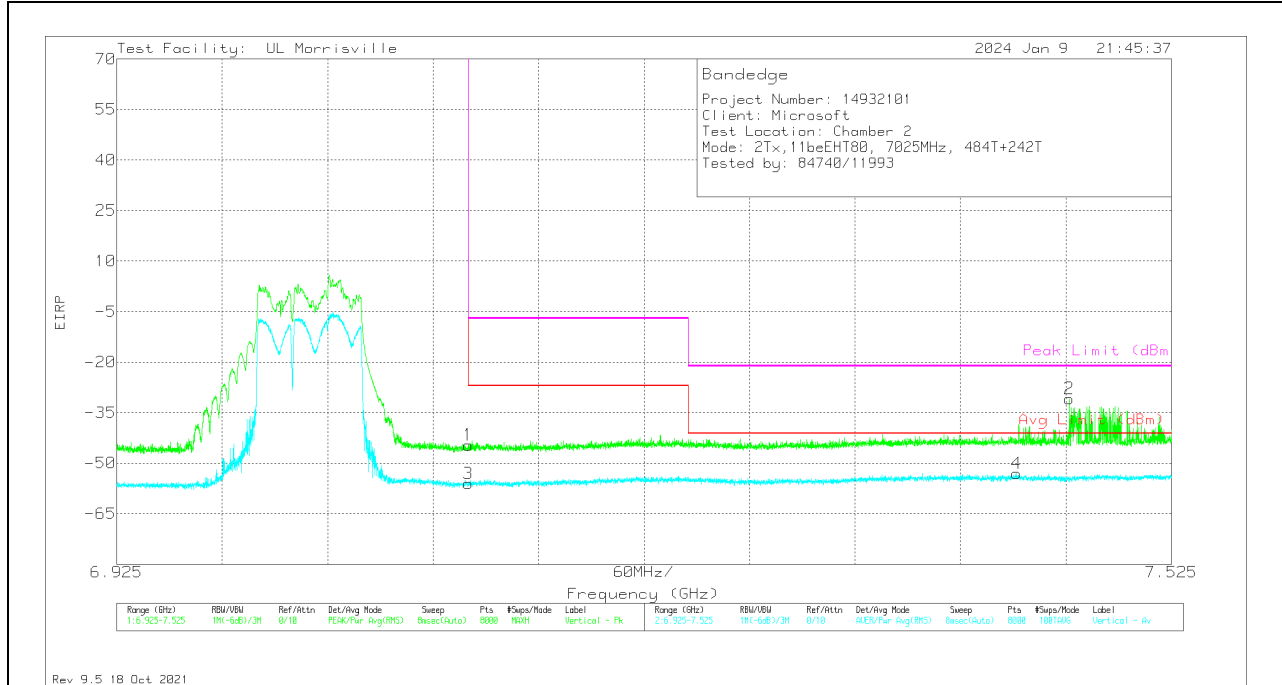

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.46694	-61.1	Pk	35.6	-17.1	11.8	-30.8	-	-	-21.2	-9.6	4	198	V
4	*** 7.43694	-83.75	RMS	35.6	-16.7	11.8	-53.05	-41.2	-11.85	-	-	4	198	V
1	7.12505	-72.98	Pk	35.6	-19	11.8	-44.58	-	-	-7	-37.58	4	198	V
3	7.12505	-84.43	RMS	35.6	-19	11.8	-56.03	-27	-29.03	-	-	4	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW

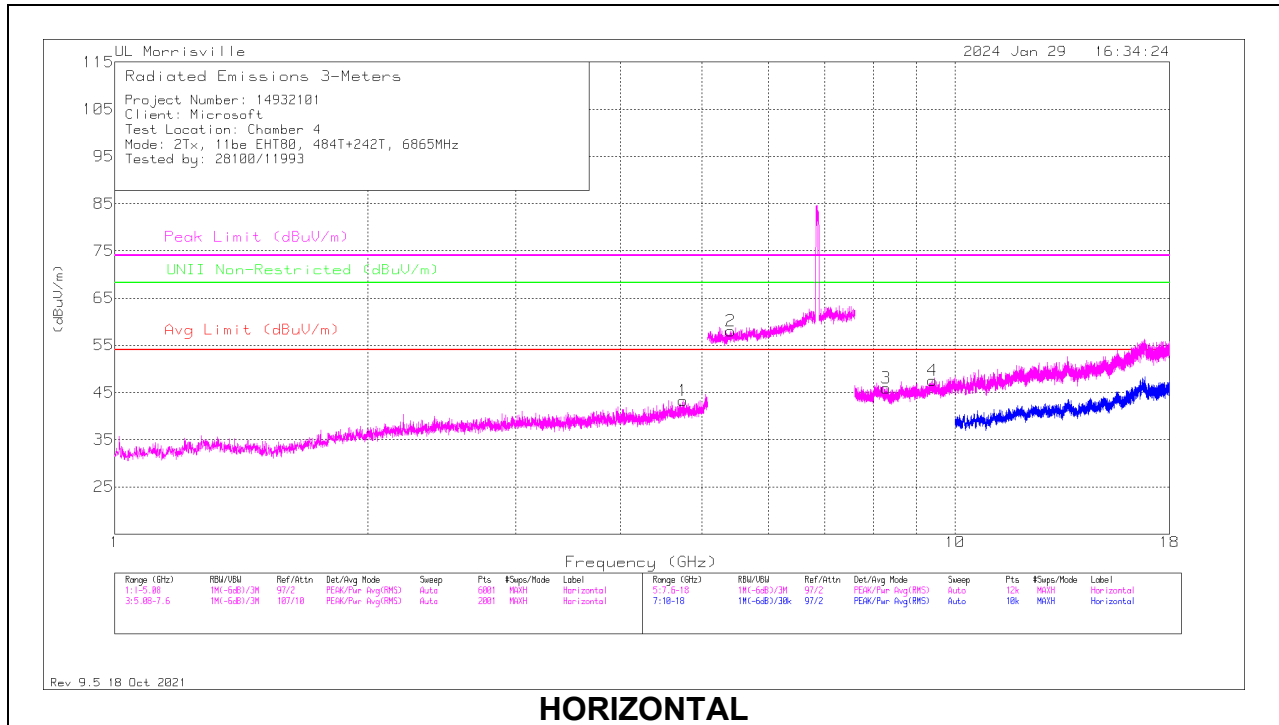

HORIZONTAL

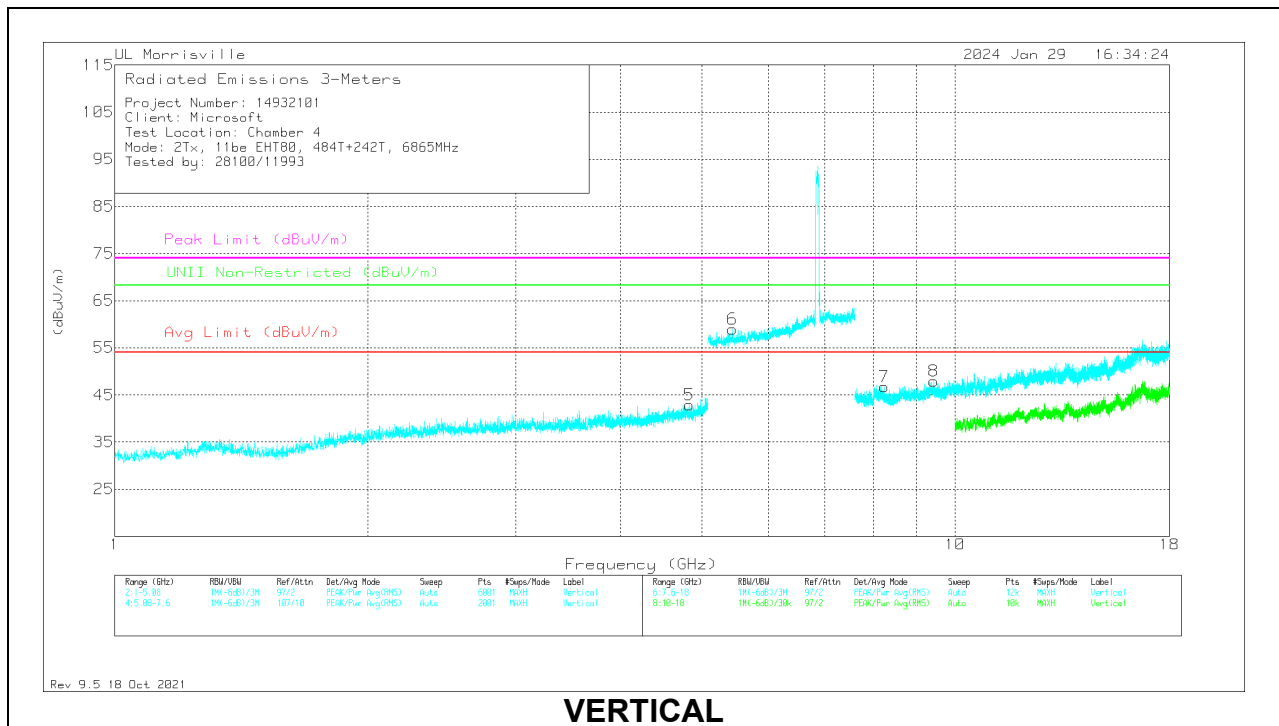


VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.74544	40.43	Pk	34	-31.2	0	0	43.23	54	-10.77	74	-30.77	-	-	0-360	100	H
5	*** 4.8284	39.74	Pk	34.1	-31	0	0	42.84	54	-11.16	74	-31.16	-	-	0-360	200	V
2	*** 5.40403	33.33	PK2	34.6	-9	0	0	58.93	-	-	74	-15.07	-	-	224	276	H
	*** 5.40586	22.01	ADR	34.6	-8.9	0	0	47.71	54	-6.29	-	-	-	-	224	276	H
6	*** 5.43363	33.07	PK2	34.6	-9.1	0	0	58.57	-	-	74	-15.43	-	-	249	161	V
	*** 5.4367	22.02	ADR	34.6	-9	0	0	47.62	54	-6.38	-	-	-	-	249	161	V
7	*** 8.23527	37.81	Pk	35.8	-27.5	.6	0	46.71	54	-7.29	74	-27.29	-	-	0-360	200	V
3	*** 8.28207	36.73	Pk	35.8	-27.2	.6	0	45.93	54	-8.07	74	-28.07	-	-	0-360	100	H
4	*** 9.40267	36.75	Pk	36.6	-26.2	.4	0	47.55	54	-6.45	74	-26.45	-	-	0-360	100	H
8	*** 9.4382	36.82	Pk	36.7	-25.9	.3	0	47.92	54	-6.08	74	-26.08	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK2 - Maximum Peak
 ADR - RMS average

MID

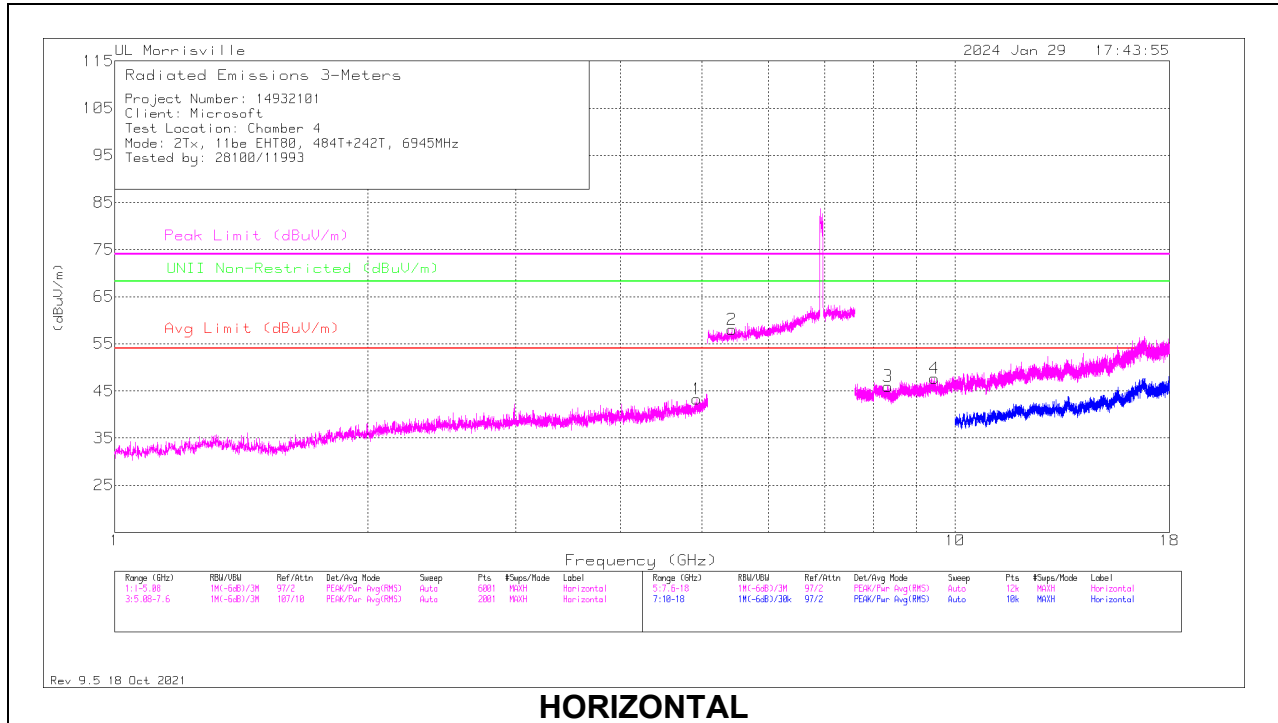

HORIZONTAL

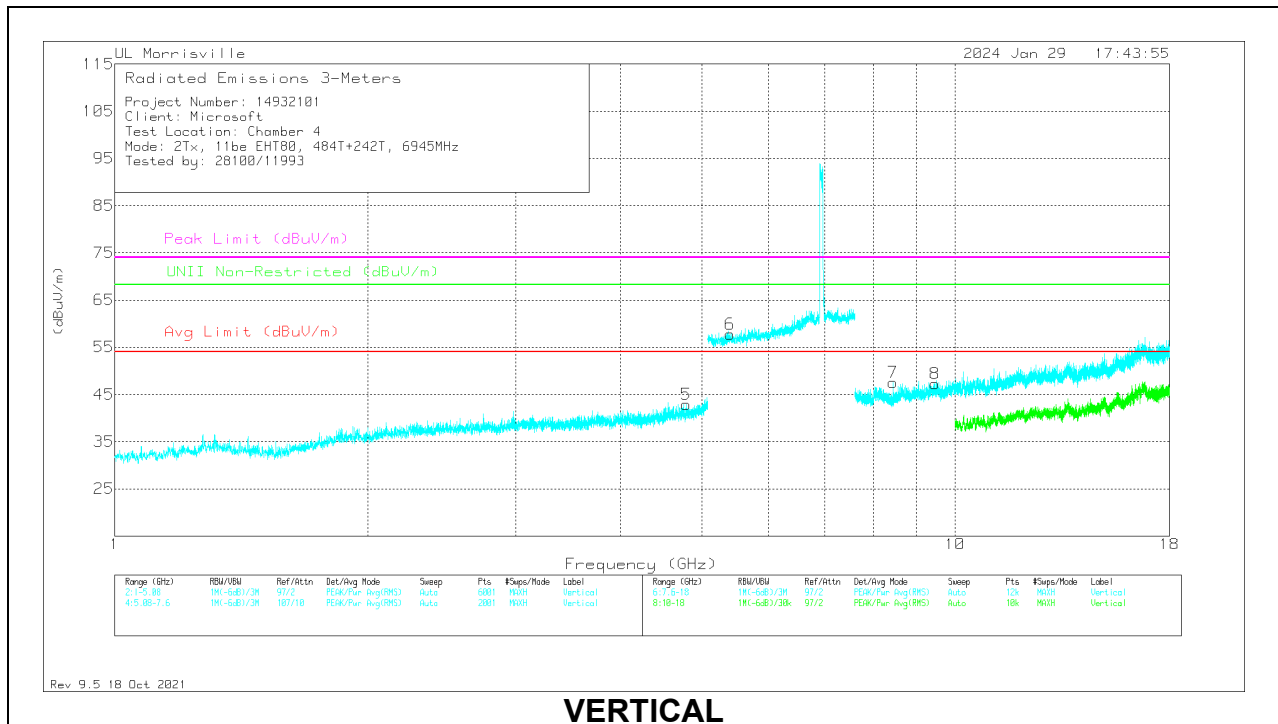

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.9304	40.34	Pk	33.9	-30.9	0	0	43.34	54	-10.66	74	-30.66	-	-	0-360	100	H
5	*** 4.78828	39.23	Pk	34.1	-30.4	0	0	42.93	54	-11.07	74	-31.07	-	-	0-360	200	V
2	*** 5.42867	33.41	PK2	34.6	-8.8	0	0	59.21	-	-	74	-14.79	-	-	139	219	H
	*** 5.43084	21.88	ADR	34.6	-8.9	0	0	47.58	54	-6.42	-	-	-	-	139	219	H
6	*** 5.39813	33.46	PK2	34.6	-9.1	0	0	58.96	-	-	74	-15.04	-	-	295	394	V
	*** 5.39645	22.21	ADR	34.6	-9	0	0	47.81	54	-6.19	-	-	-	-	295	394	V
3	*** 8.3228	36.5	Pk	35.8	-27	.7	0	46	54	-8	74	-28	-	-	0-360	200	H
7	*** 8.44413	38.21	Pk	35.8	-27	.5	0	47.51	54	-6.49	74	-26.49	-	-	0-360	100	V
4	*** 9.4486	36.86	Pk	36.7	-26.2	.3	0	47.66	54	-6.34	74	-26.34	-	-	0-360	200	H
8	*** 9.47027	36.08	Pk	36.7	-25.8	.3	0	47.28	54	-6.72	74	-26.72	-	-	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADR - RMS average

HIGH

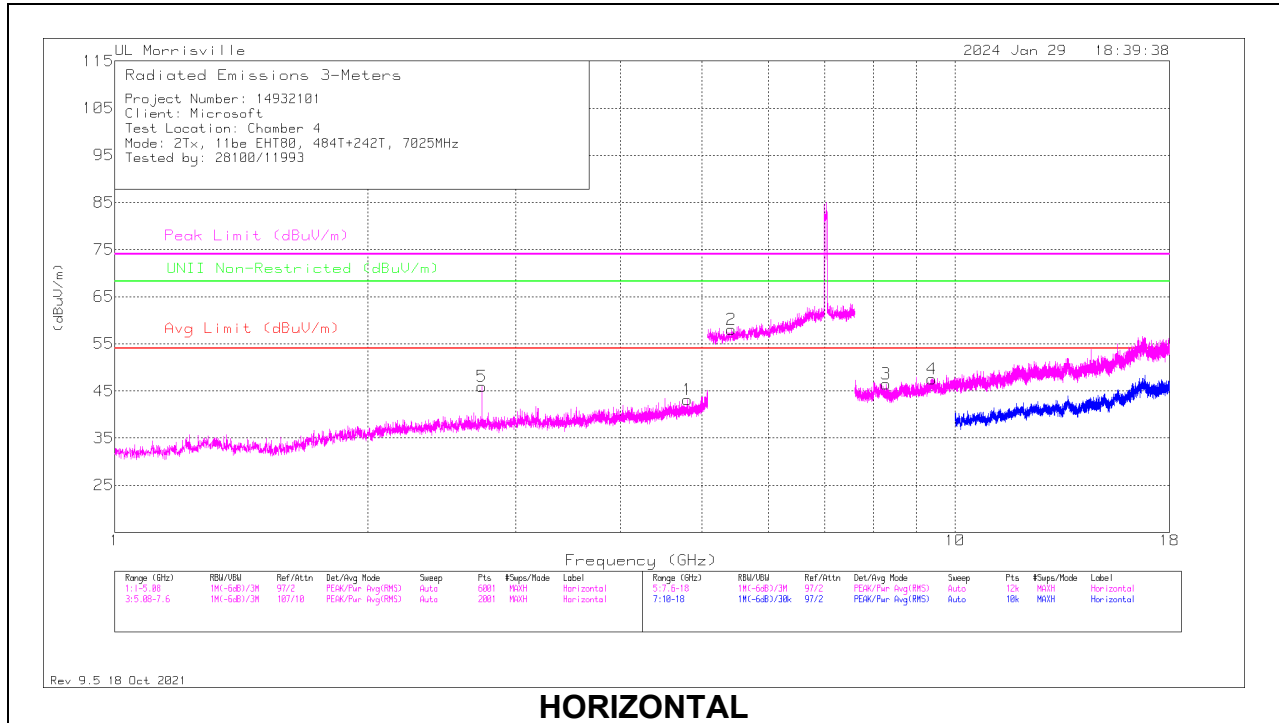

HORIZONTAL

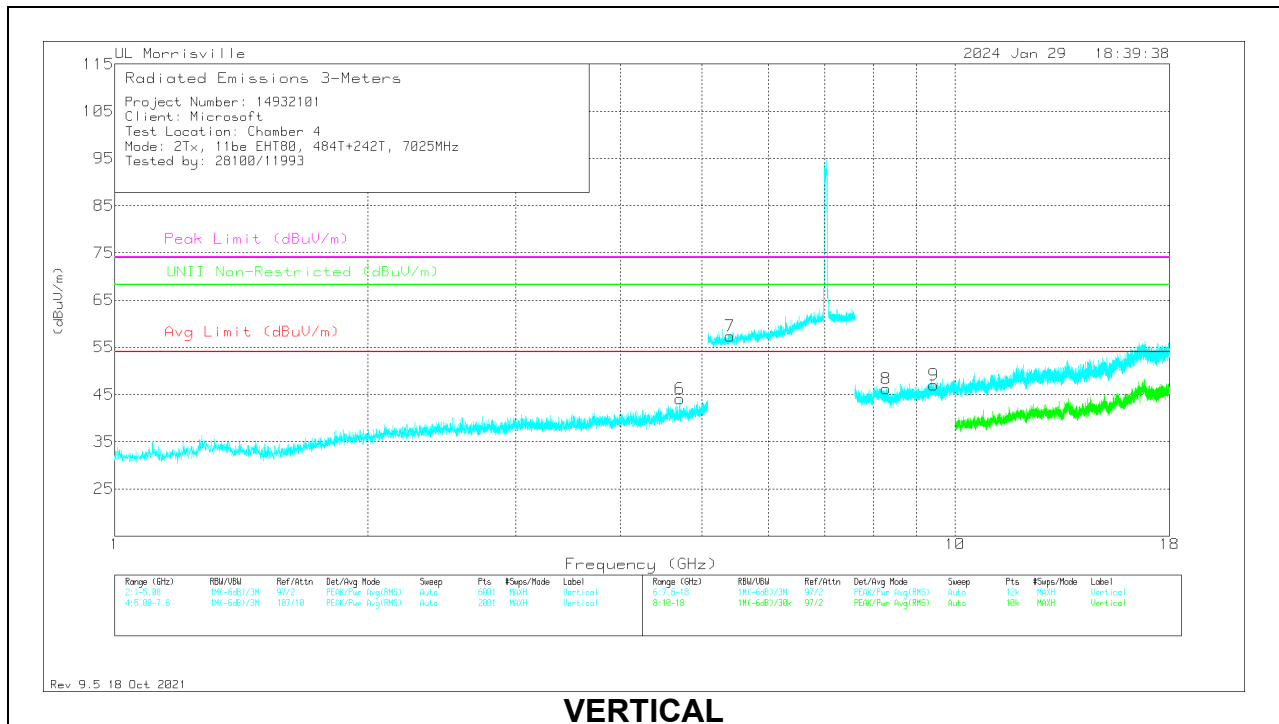

VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	89509 ACF (dB/m)	Gain/Loss (dB)	Filter (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.80392	39.44	Pk	34.1	-30.4	0	0	43.14	54	-10.86	74	-30.86	-	-	0-360	100	H
5	* ** 2.73672	49.15	Pk	32.5	-35.7	0	0	45.95	54	-8.05	74	-28.05	-	-	0-360	100	H
6	* ** 4.70532	41.28	Pk	34.1	-31.3	0	0	44.08	54	-9.92	74	-29.92	-	-	0-360	200	V
2	* ** 5.41327	33.6	PK2	34.6	-8.9	0	0	59.3	-	-	74	-14.7	-	-	354	236	H
	* ** 5.41352	22.08	ADR	34.6	-8.9	0	0	47.78	54	-6.22	-	-	-	-	354	236	H
7	* ** 5.39614	33.49	PK2	34.6	-9	0	0	59.09	-	-	74	-14.91	-	-	329	371	V
	* ** 5.39563	22.15	ADR	34.6	-9	0	0	47.75	54	-6.25	-	-	-	-	329	371	V
8	* ** 8.27687	37.25	Pk	35.8	-27.4	.6	0	46.25	54	-7.75	74	-27.75	-	-	0-360	200	V
3	* ** 8.28467	37.13	Pk	35.8	-27.1	.6	0	46.43	54	-7.57	74	-27.57	-	-	0-360	100	H
4	* ** 9.3862	36.29	Pk	36.6	-25.9	.5	0	47.49	54	-6.51	74	-26.51	-	-	0-360	100	H
9	* ** 9.4382	35.91	Pk	36.7	-25.9	.3	0	47.01	54	-6.99	74	-26.99	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK2 - Maximum Peak
 ADR - RMS average

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+242T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

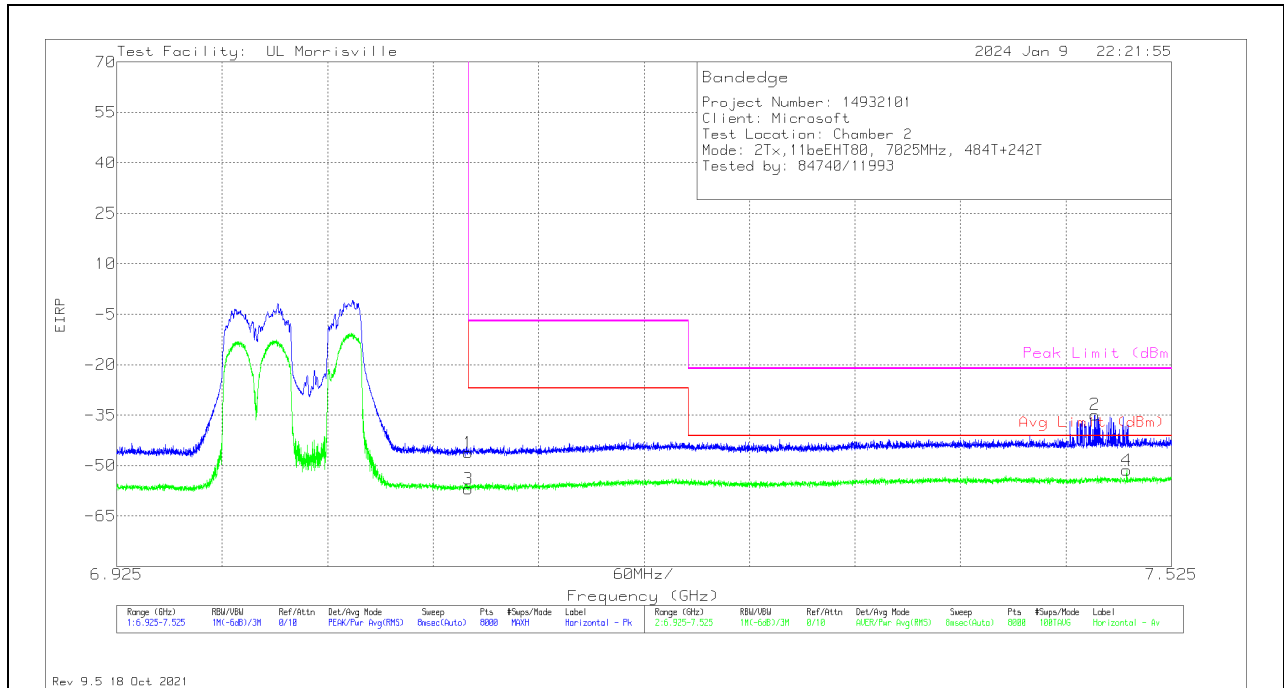

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48149	-65.79	Pk	35.7	-16.6	11.8	-34.89	-	-	-21.2	-13.69	333	300	H
4	*** 7.49949	-82	RMS	35.7	-16.9	11.8	-51.4	-41.2	-10.2	-	-	333	300	H
1	7.12505	-74.5	Pk	35.6	-19	11.8	-46.1	-	-	-7	-39.1	333	300	H
3	7.12505	-85.32	RMS	35.6	-19	11.8	-56.92	-27	-29.92	-	-	333	300	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

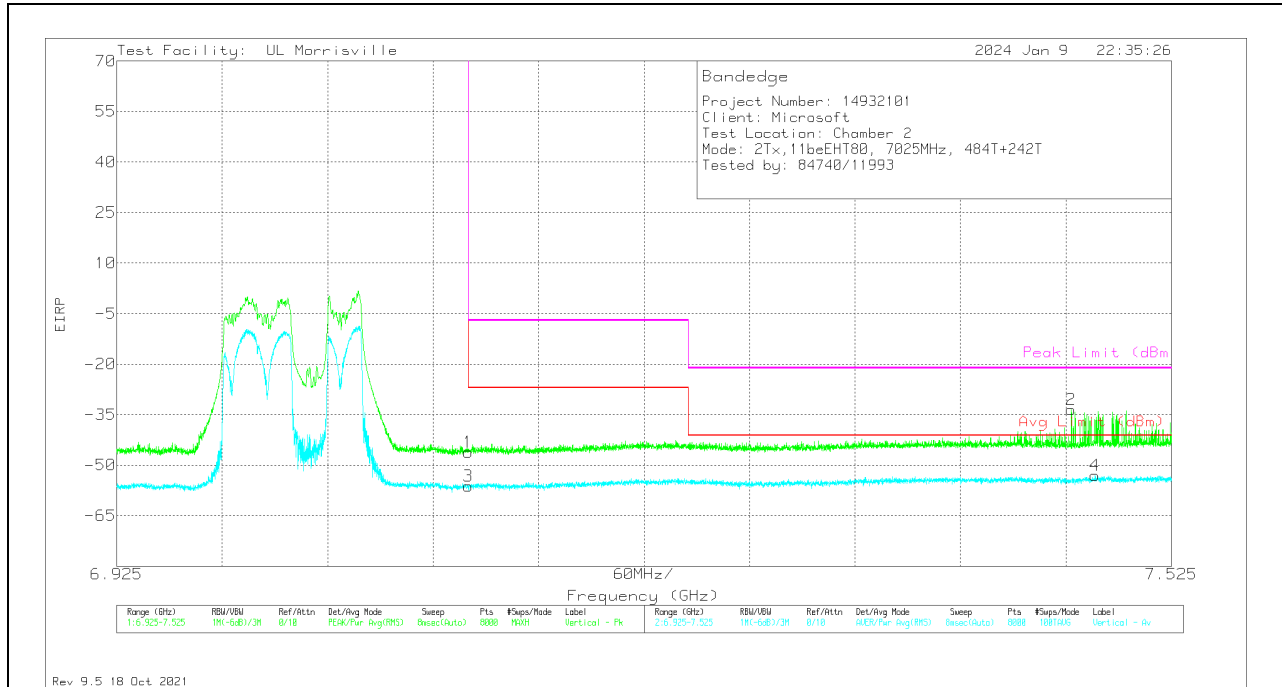


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.46792	-63.76	Pk	35.6	-17.1	11.8	-33.46	-	-	-21.2	-12.26	86	304	V
4	*** 7.48157	-83.95	RMS	35.7	-16.6	11.8	-53.05	-41.2	-11.85	-	-	86	304	V
1	7.12505	-74.62	Pk	35.6	-19	11.8	-46.22	-	-	-7	-39.22	86	304	V
3	7.12505	-84.59	RMS	35.6	-19	11.8	-56.19	-27	-29.19	-	-	86	304	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 242T+484T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

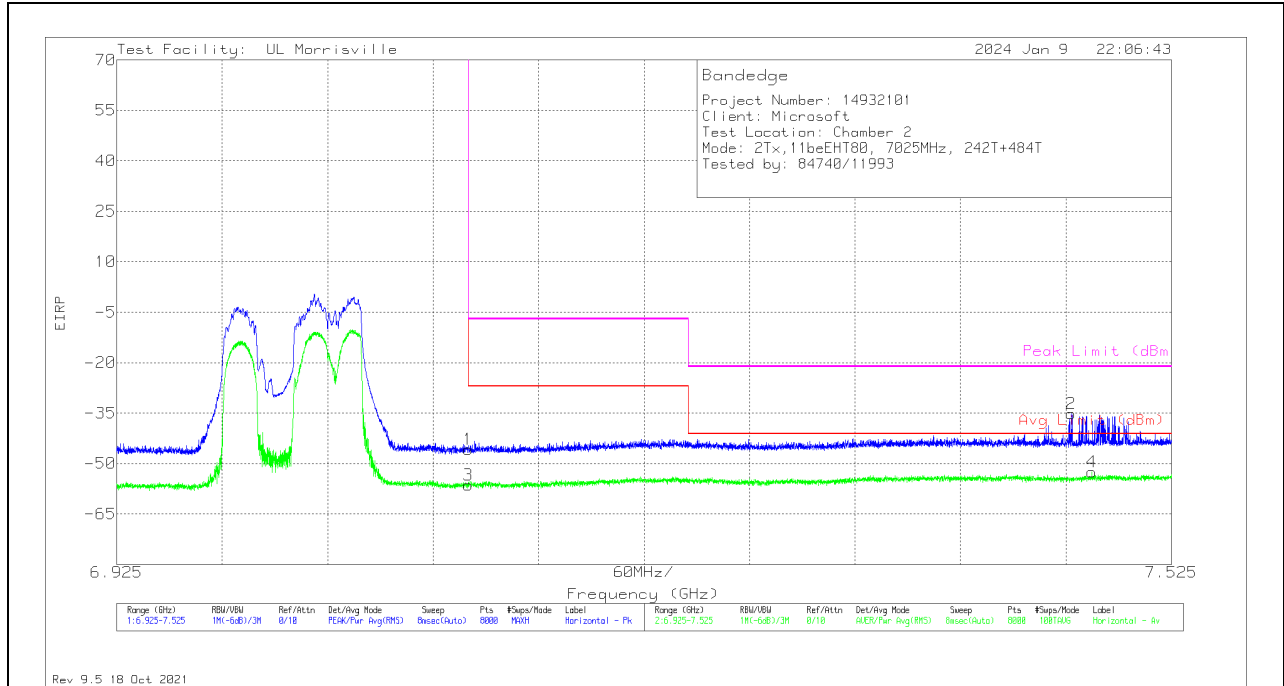

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.46784	-65.55	Pk	35.6	-17.1	11.8	-35.25	-	-	-21.2	-14.05	332	289	H
4	*** 7.47962	-83.3	RMS	35.7	-16.7	11.8	-52.5	-41.2	-11.3	-	-	332	288	H
1	7.12505	-74.14	Pk	35.6	-19	11.8	-45.74	-	-	-7	-38.74	332	289	H
3	7.12505	-84.87	RMS	35.6	-19	11.8	-56.47	-27	-29.47	-	-	332	288	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

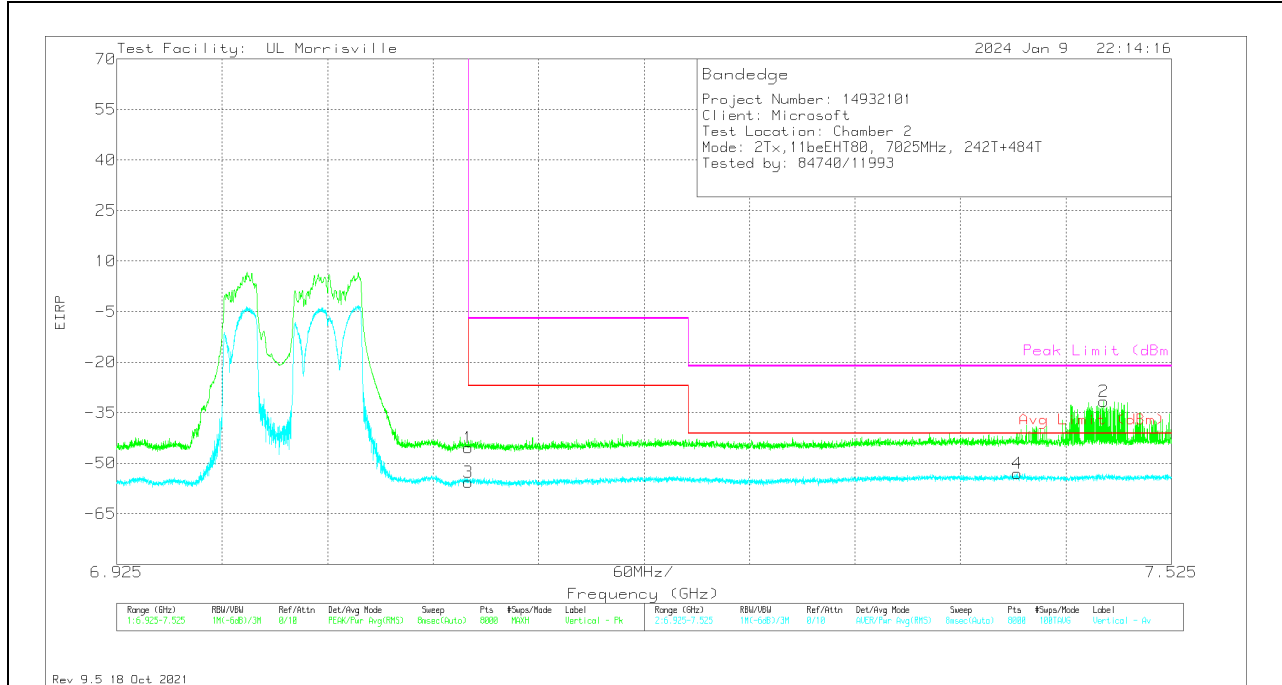


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48659	-62.69	Pk	35.7	-16.5	11.8	-31.69	-	-	-21.2	-10.49	48	227	V
4	*** 7.43716	-83.75	RMS	35.6	-16.7	11.8	-53.05	-41.2	-11.85	-	-	48	227	V
1	7.12505	-73.74	Pk	35.6	-19	11.8	-45.34	-	-	-7	-38.34	48	227	V
3	7.12505	-84.01	RMS	35.6	-19	11.8	-55.61	-27	-28.61	-	-	48	227	V

Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

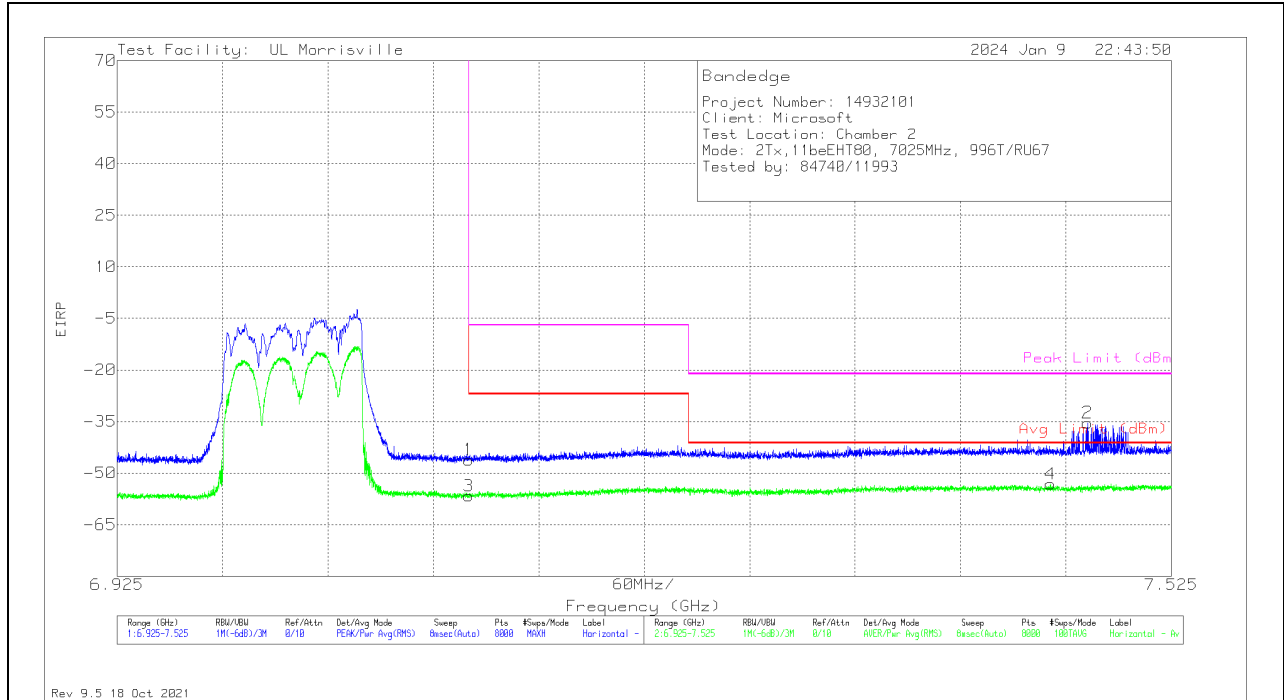

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.47729	-66.17	Pk	35.7	-16.7	11.8	-35.37	-	-	-21.2	-14.17	330	286	H
4	*** 7.45621	-83.78	RMS	35.6	-16.8	11.8	-53.18	-41.2	-11.98	-	-	330	286	H
1	7.12505	-74.56	Pk	35.6	-19	11.8	-46.16	-	-	-7	-39.16	330	286	H
3	7.12505	-85.06	RMS	35.6	-19	11.8	-56.66	-27	-29.66	-	-	330	286	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

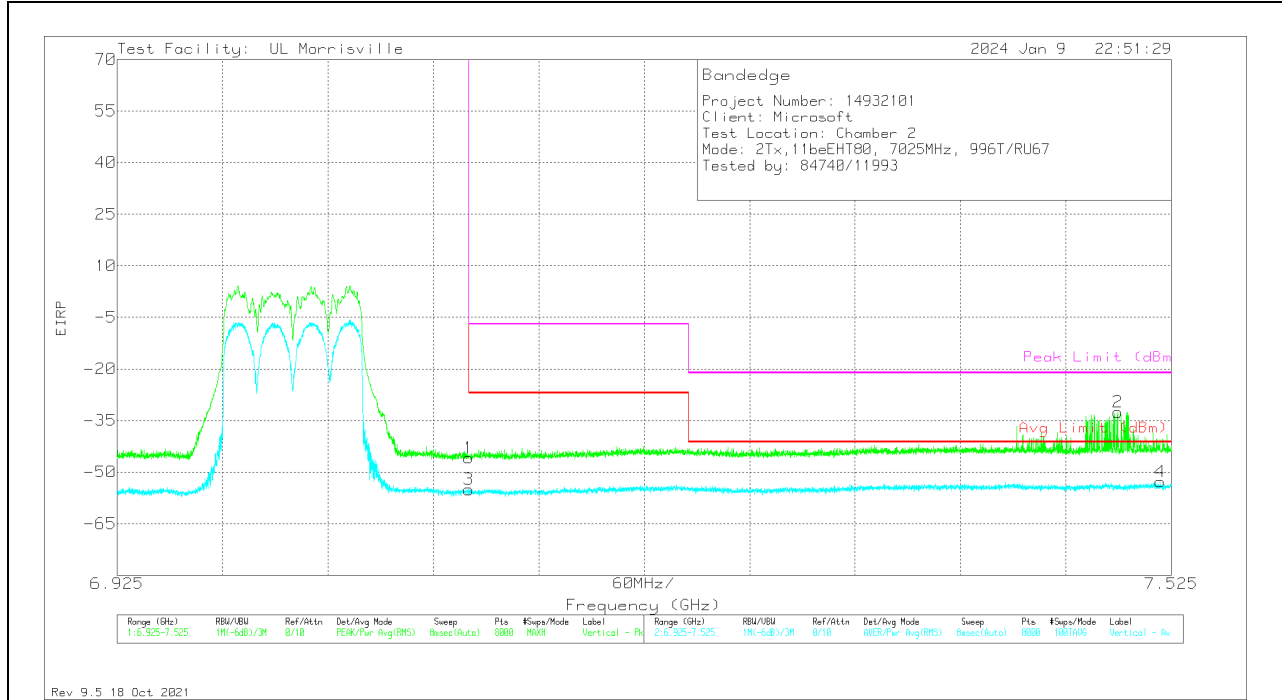

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.49447	-63.37	Pk	35.7	-16.7	11.8	-32.57	-	-	-21.2	-11.37	52	213	V
4	*** 7.5187	-83.62	RMS	35.7	-16.7	11.8	-52.82	-41.2	-11.62	-	-	52	213	V
1	7.12505	-74.28	Pk	35.6	-19	11.8	-45.88	-	-	-7	-38.88	52	213	V
3	7.12505	-83.46	RMS	35.6	-19	11.8	-55.06	-27	-28.06	-	-	52	213	V


Pk - Peak detector
 RMS - RMS detection

11.1.14. TX ABOVE 1 GHz 802.11be EHT160 MODE IN THE UNII-8 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T (CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

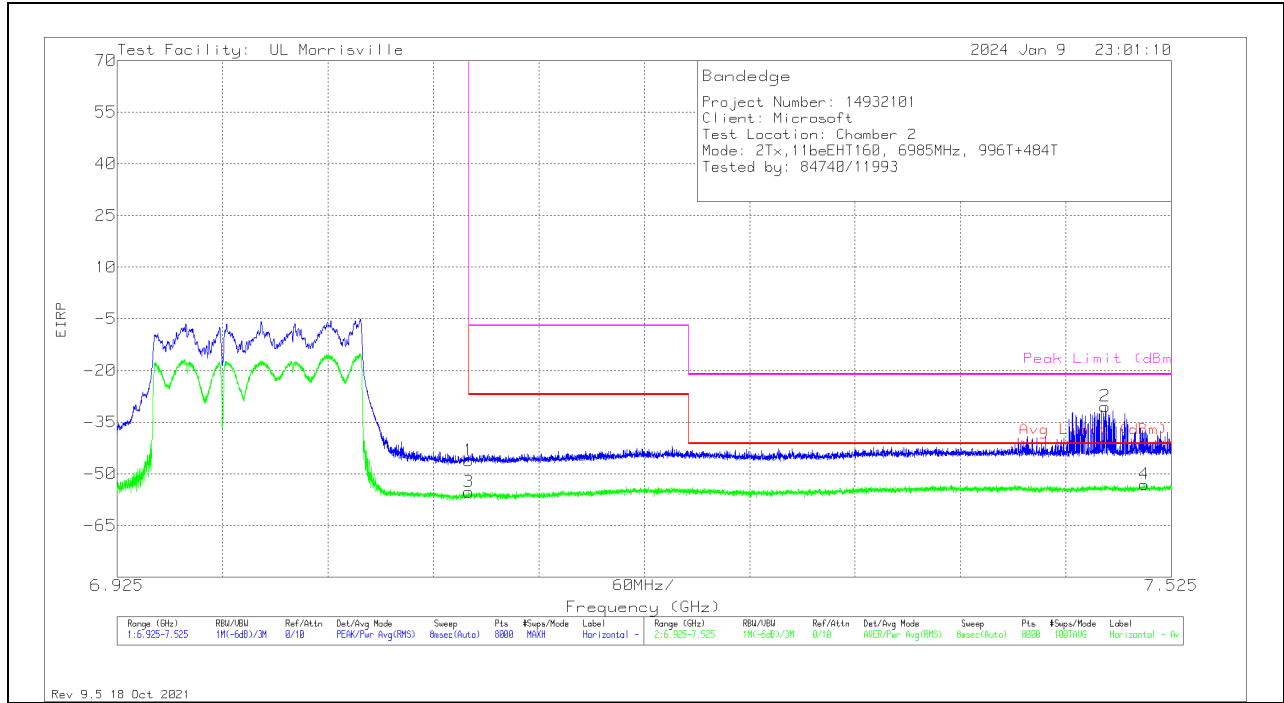

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48727	-61.42	Pk	35.7	-16.5	11.8	-30.42	-	-	-21.2	-9.22	67	365	H
4	*** 7.50955	-84.18	RMS	35.7	-16.4	11.8	-53.08	-41.2	-11.88	-	-	67	365	H
1	7.12505	-74.53	Pk	35.6	-19	11.8	-46.13	-	-	-7	-39.13	67	365	H
3	7.12505	-83.64	RMS	35.6	-19	11.8	-55.24	-27	-28.24	-	-	67	365	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

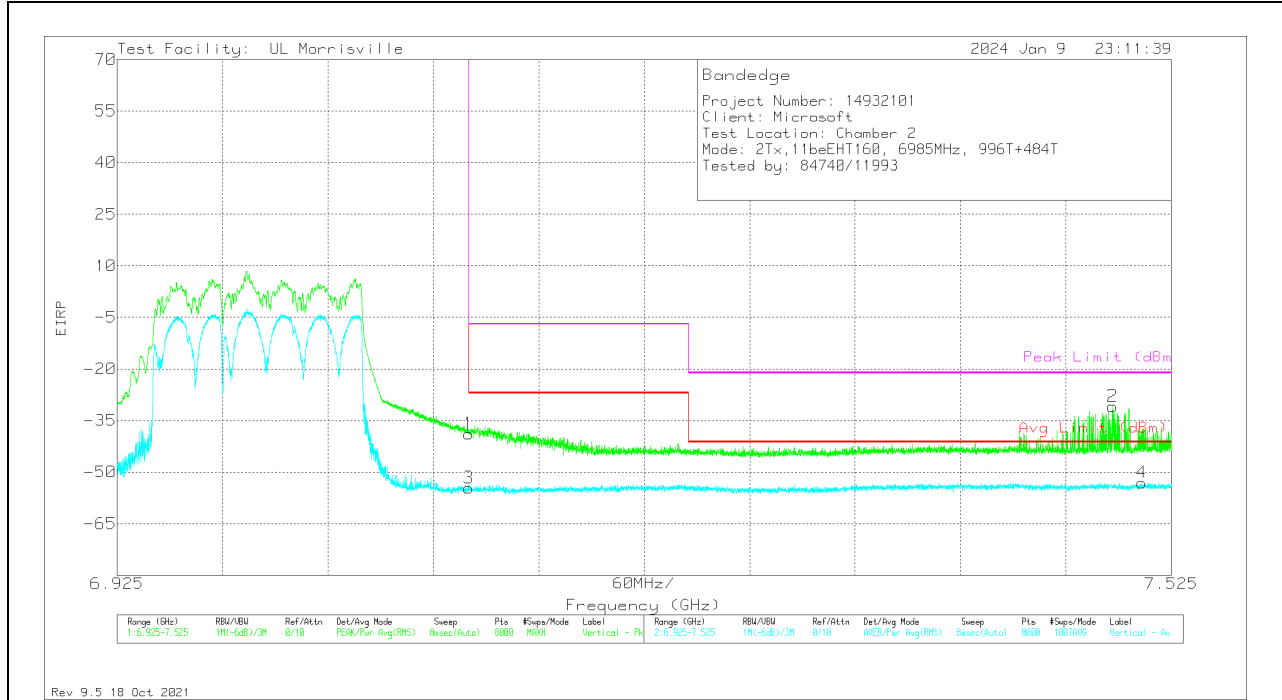


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.49154	-61.75	Pk	35.7	-16.6	11.8	-30.85	-	-	-21.2	-9.65	49	226	V
4	*** 7.5082	-84.08	RMS	35.7	-16.5	11.8	-53.08	-41.2	-11.88	-	-	49	226	V
1	7.12505	-67.29	Pk	35.6	-19	11.8	-38.89	-	-	-7	-31.89	49	226	V
3	7.12505	-83.01	RMS	35.6	-19	11.8	-54.61	-27	-27.61	-	-	49	226	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

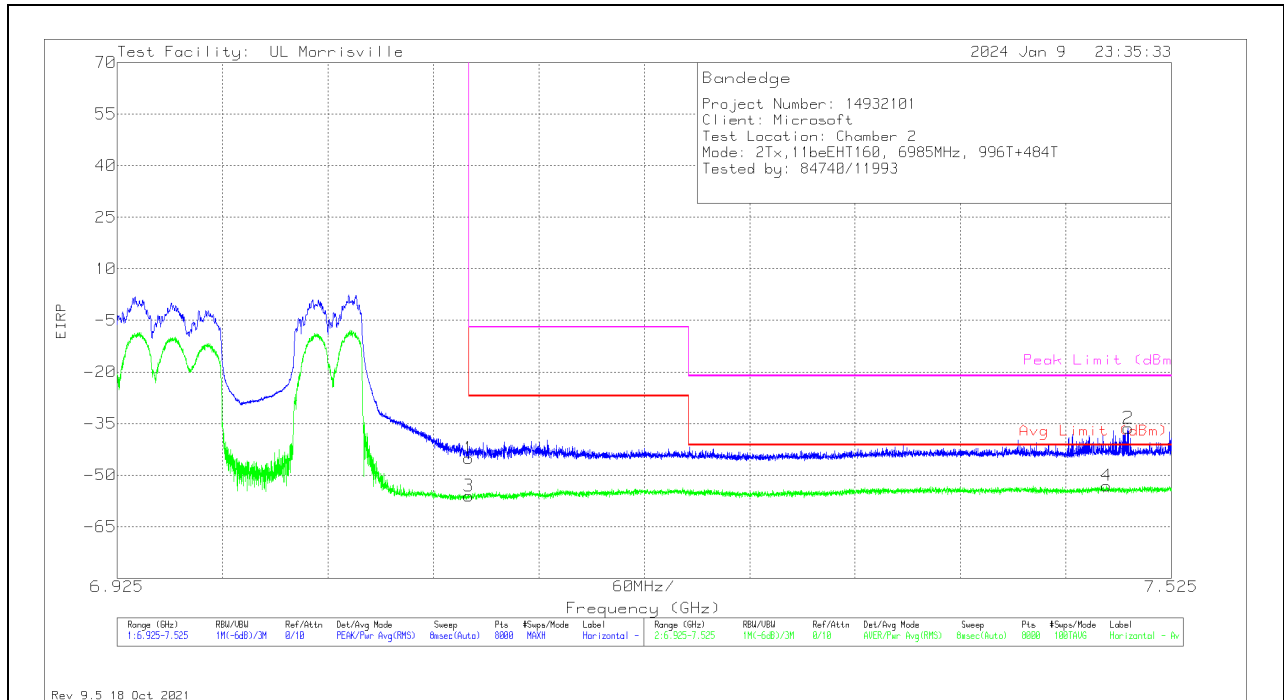

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.50047	-67.03	Pk	35.7	-16.8	11.8	-36.33	-	-	-21.2	-15.13	107	401	H
4	*** 7.48809	-84.09	RMS	35.7	-16.5	11.8	-53.09	-41.2	-11.89	-	-	107	401	H
1	7.12505	-73.46	Pk	35.6	-19	11.8	-45.06	-	-	-7	-38.06	107	401	H
3	7.12505	-84.45	RMS	35.6	-19	11.8	-56.05	-27	-29.05	-	-	107	401	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

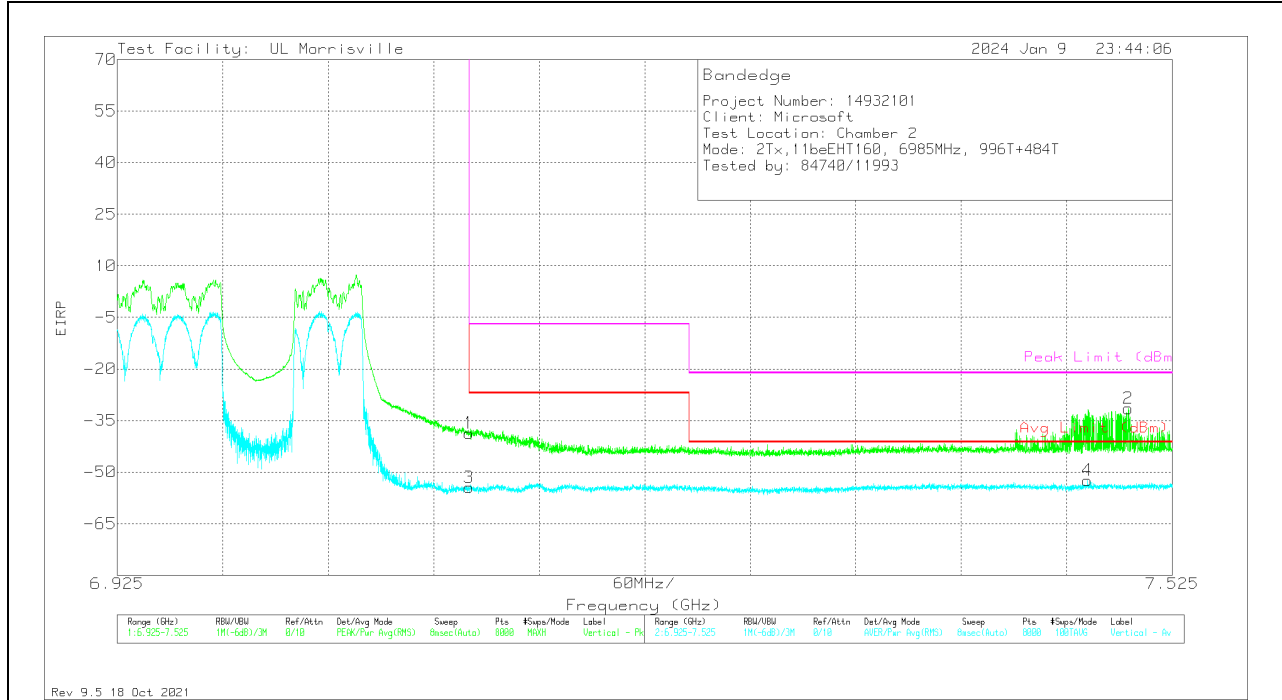


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.50002	-62.08	Pk	35.7	-16.9	11.8	-31.48	-	-	-21.2	-10.28	49	216	V
4	*** 7.47669	-83.21	RMS	35.7	-16.7	11.8	-52.41	-41.2	-11.21	-	-	49	216	V
1	7.12505	-67.07	Pk	35.6	-19	11.8	-38.67	-	-	-7	-31.67	49	216	V
3	7.12505	-82.89	RMS	35.6	-19	11.8	-54.49	-27	-27.49	-	-	49	216	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+996T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

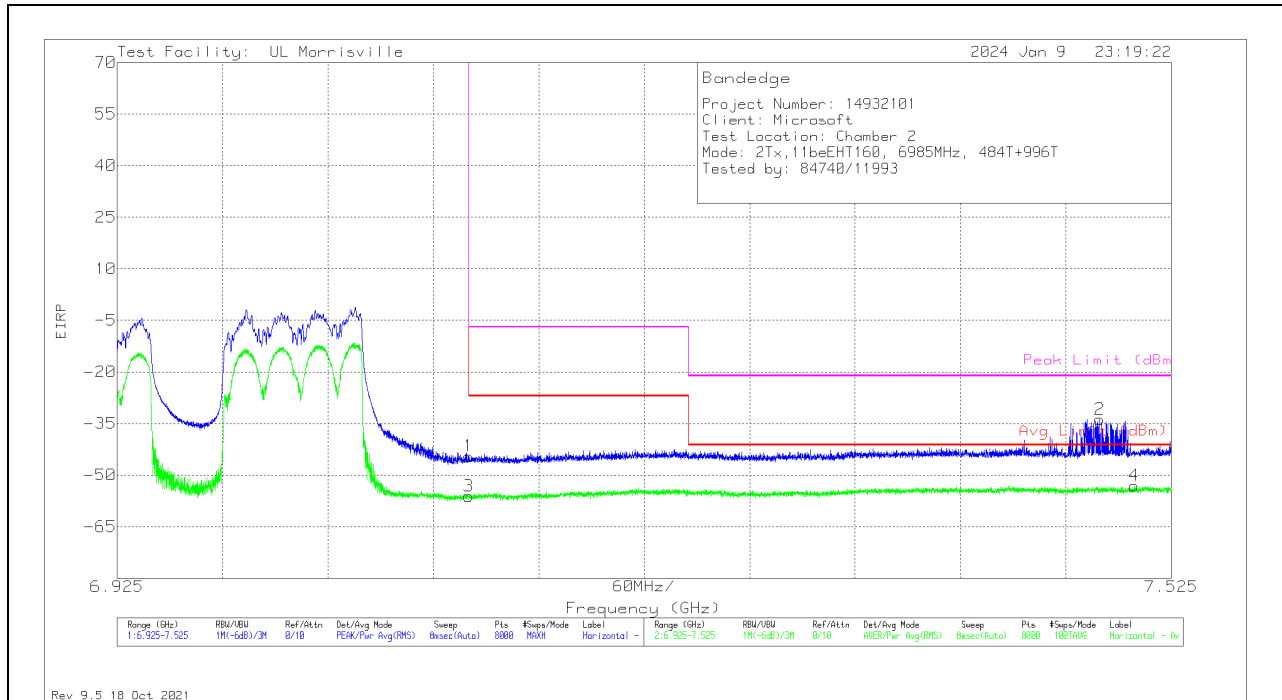

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.48412	-64.69	Pk	35.7	-16.6	11.8	-33.79	-	-	-21.2	-12.59	331	275	H
4	*** 7.50377	-83.88	RMS	35.7	-16.7	11.8	-53.08	-41.2	-11.88	-	-	331	275	H
1	7.12505	-72.9	Pk	35.6	-19	11.8	-44.5	-	-	-7	-37.5	331	275	H
3	7.12505	-84.54	RMS	35.6	-19	11.8	-56.14	-27	-29.14	-	-	331	275	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

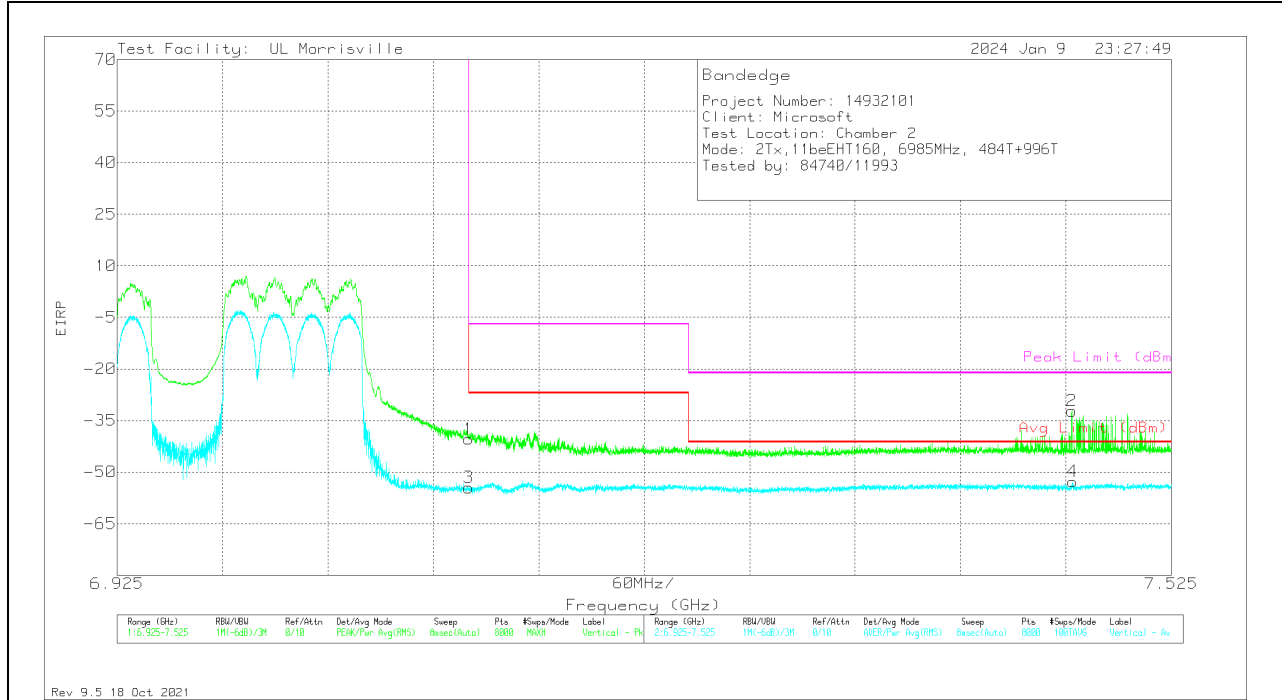


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.46837	-62.51	Pk	35.6	-17.1	11.8	-32.21	-	-	-21.2	-11.01	52	213	V
4	*** 7.46889	-83.16	RMS	35.6	-17	11.8	-52.76	-41.2	-11.56	-	-	52	213	V
1	7.12505	-68.8	Pk	35.6	-19	11.8	-40.4	-	-	-7	-33.4	52	213	V
3	7.12505	-82.92	RMS	35.6	-19	11.8	-54.52	-27	-27.52	-	-	52	213	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: SU

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

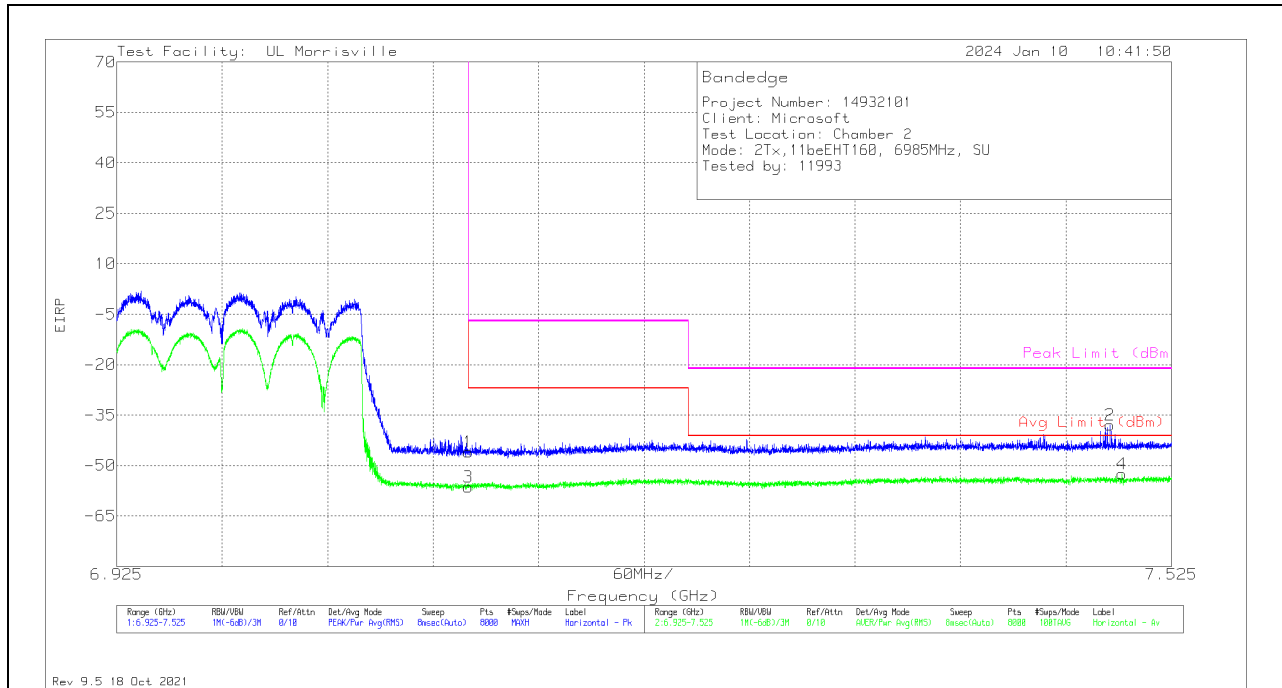

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.49004	-68.91	PK	35.7	-16.6	11.8	0	-38.01	-	-	-21.2	-16.81	103	367	H
4	* ** 7.49687	-83.3	RMS	35.7	-16.8	11.8	.11	-52.49	-41.2	-11.29	-	-	103	367	H
1	7.12505	-74.3	PK	35.6	-19	11.8	0	-45.9	-	-	-7	-38.9	103	367	H
3	7.12505	-84.89	RMS	35.6	-19	11.8	.11	-56.38	-27	-29.38	-	-	103	367	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

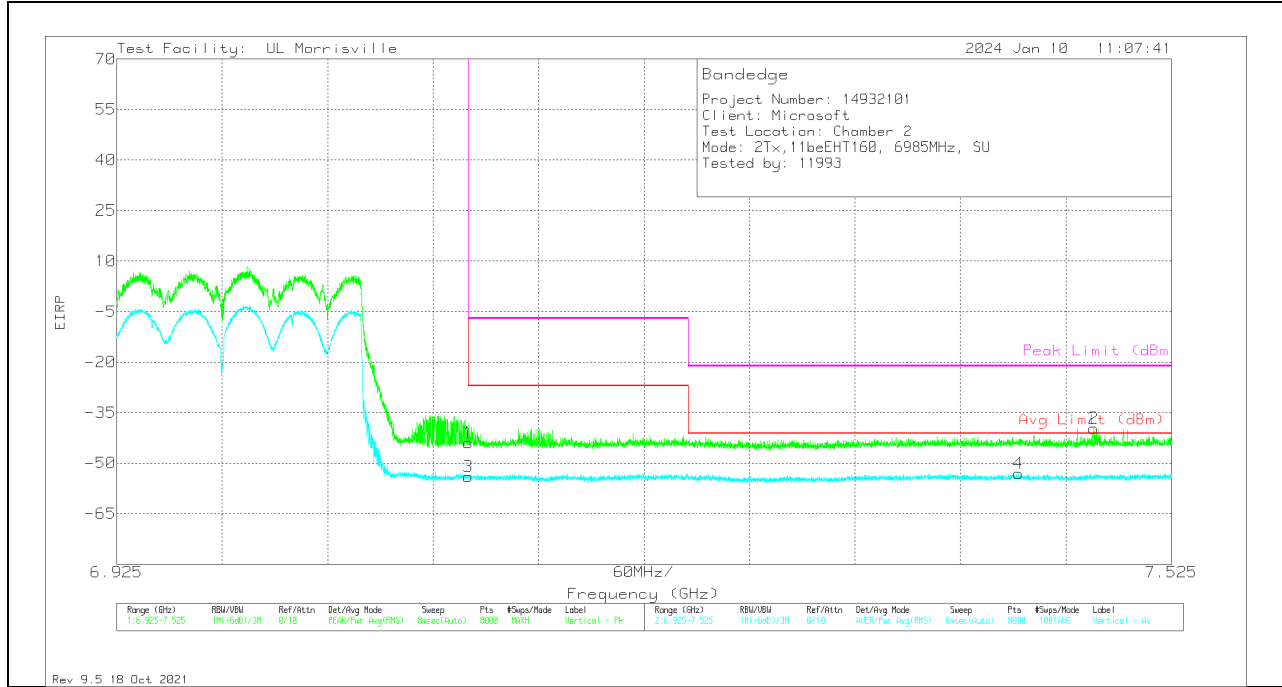

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.48074	-70.53	Pk	35.7	-16.6	11.8	0	-39.63	-	-	-21.2	-18.43	67	208	V
4	* ** 7.43814	-83.78	RMS	35.6	-16.8	11.8	.11	-53.07	-41.2	-11.87	-	-	67	208	V
1	7.12505	-72.31	PK	35.6	-19	11.8	0	-43.91	-	-	-7	-36.91	67	208	V
3	7.12505	-82.43	RMS	35.6	-19	11.8	.11	-53.92	-27	-26.92	-	-	67	208	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

11.1.15. TX ABOVE 1 GHz 802.11be EHT320 MODE IN THE UNII-8 BAND

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+2x996T (CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

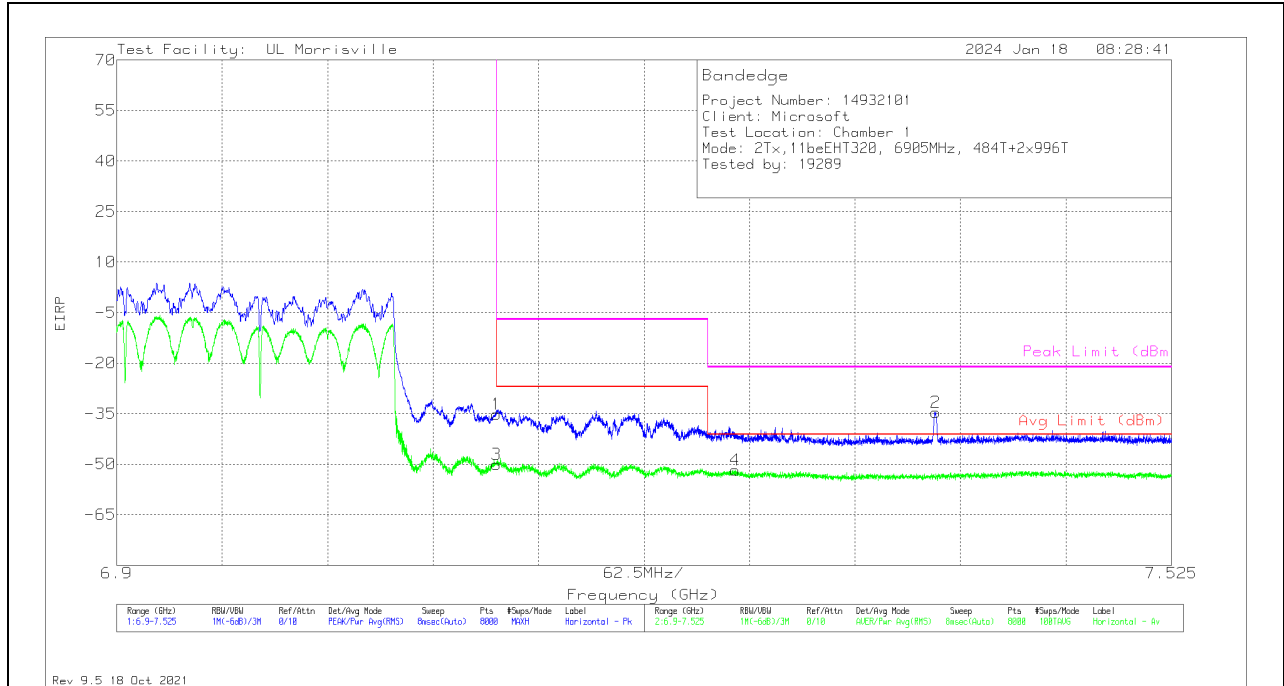

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.3853	-64.95	Pk	35.7	-17.2	11.8	0	-34.65	-	-	-21.2	-13.45	17	346	H
4	*** 7.26638	-81.57	RMS	35.6	-17.7	11.8	.14	-51.73	-41.2	-10.53	-	-	17	346	H
1	7.12503	-63.62	PK	35.6	-19	11.8	0	-35.22	-	-	-7	-28.22	17	346	H
3	7.12503	-78.65	RMS	35.6	-19	11.8	.14	-50.11	-27	-23.11	-	-	17	346	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

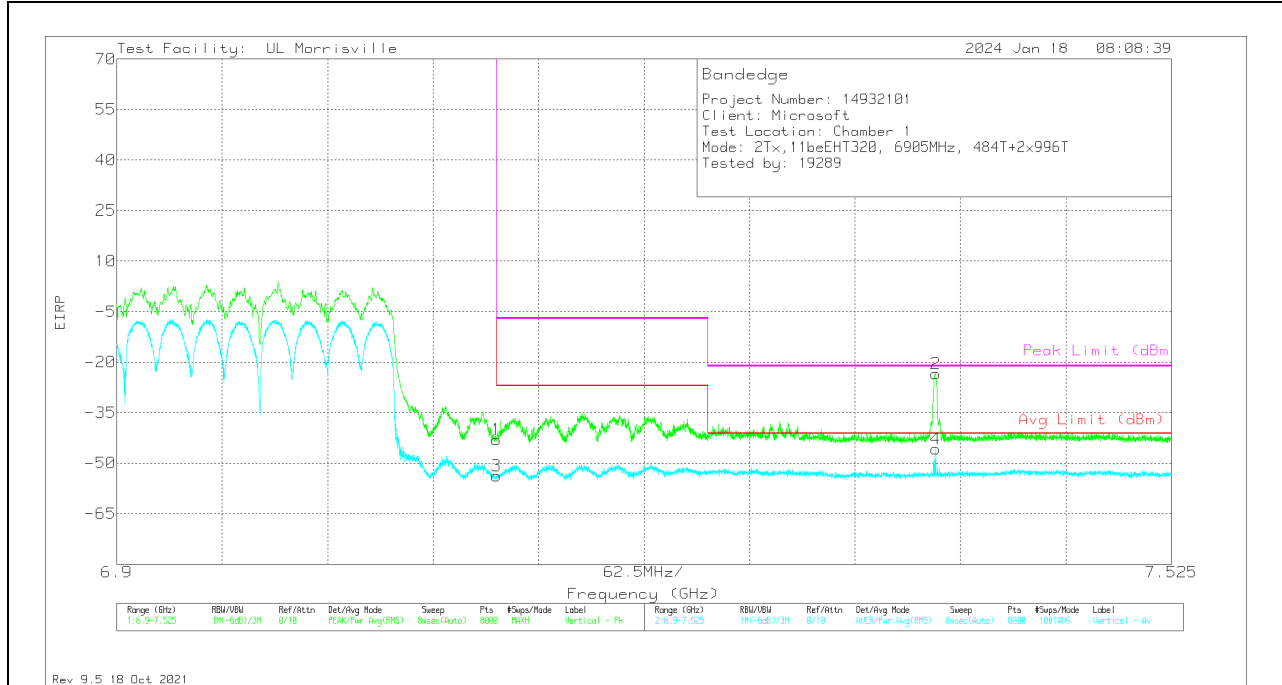

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38522	-53.77	Pk	35.7	-17.2	11.8	0	-23.47	-	-	-21.2	-2.27	17	107	V
4	* ** 7.38522	-76.19	RMS	35.7	-17.2	11.8	.14	-45.75	-41.2	-4.55	-	-	17	107	V
1	7.12503	-71.34	Pk	35.6	-19	11.8	0	-42.94	-	-	-7	-35.94	17	107	V
3	7.12503	-82.36	RMS	35.6	-19	11.8	.14	-53.82	-27	-26.82	-	-	17	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

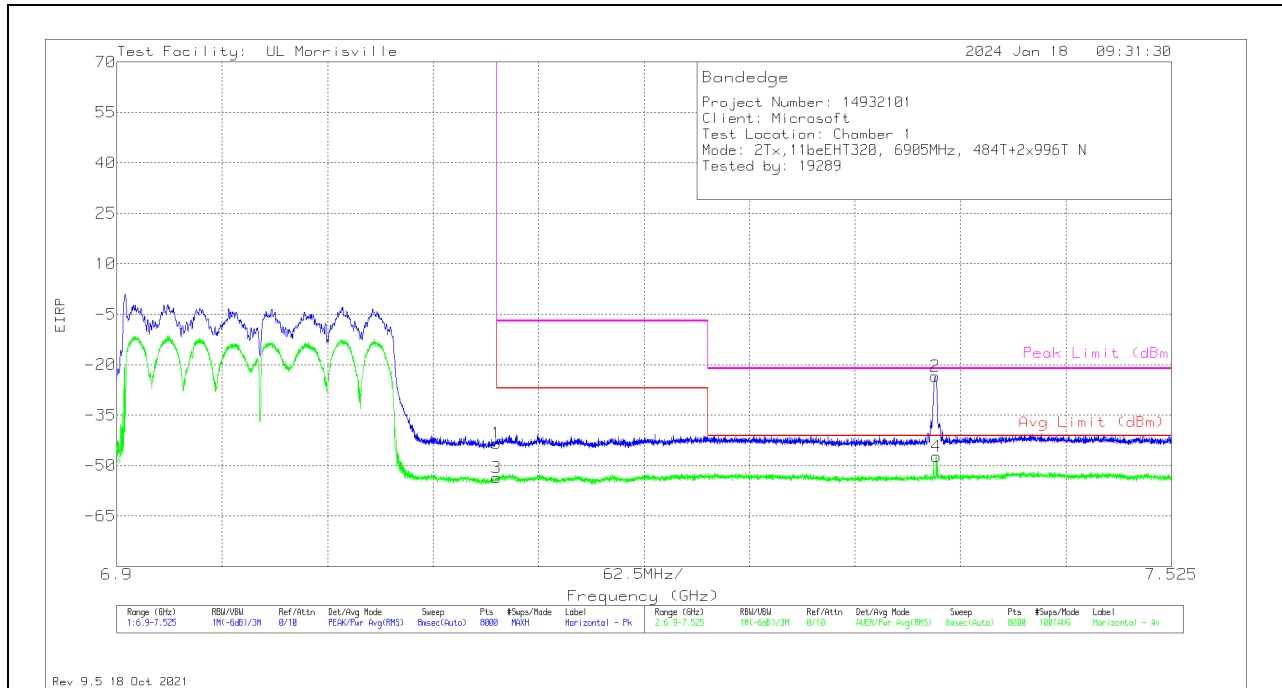

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38498	-53.67	Pk	35.7	-17.2	11.8	0	-23.37	-	-	-21.2	-2.17	35	306	H
4	* ** 7.38569	-77.73	RMS	35.7	-17.2	11.8	.14	-47.29	-41.2	-6.09	-	-	35	306	H
1	7.12503	-71.76	Pk	35.6	-19	11.8	0	-43.36	-	-	-7	-36.36	35	306	H
3	7.12503	-82.08	RMS	35.6	-19	11.8	.14	-53.54	-27	-26.54	-	-	35	306	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

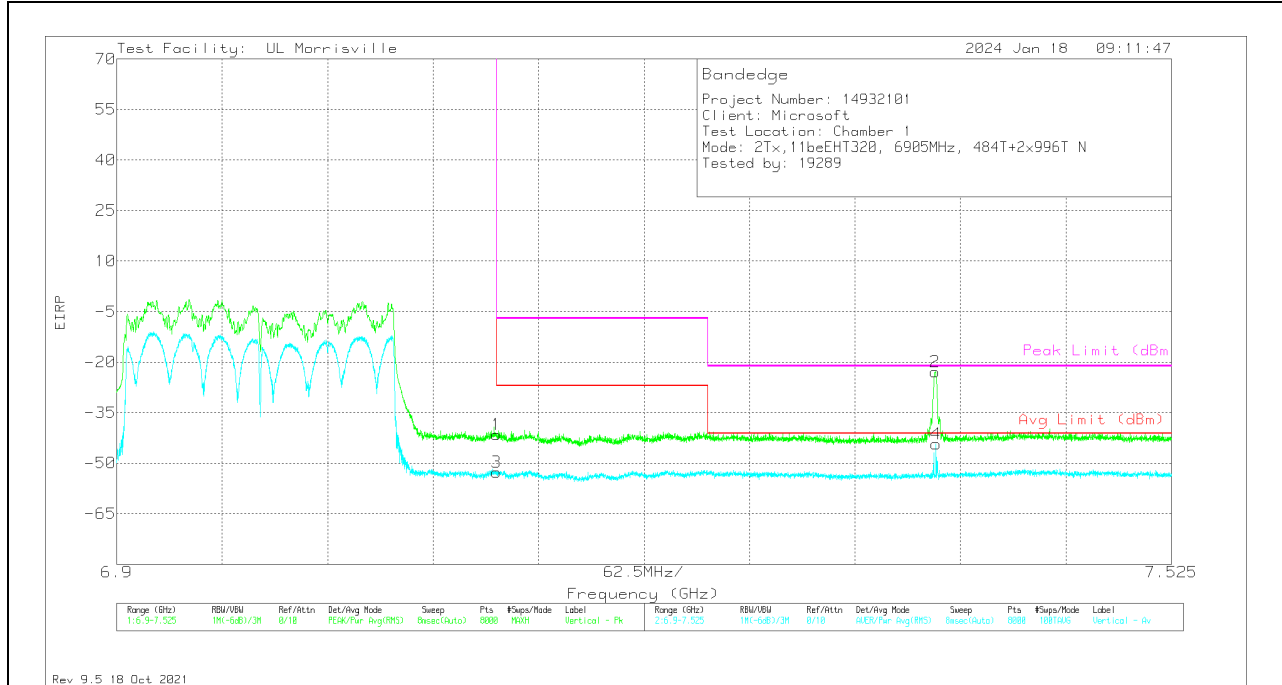


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38514	-53.11	Pk	35.7	-17.2	11.8	0	-22.81	-	-	-21.2	-1.61	172	271	V
4	* ** 7.38553	-74.71	RMS	35.7	-17.2	11.8	.14	-44.27	-41.2	-3.07	-	-	172	271	V
1	7.12503	-69.84	Pk	35.6	-19	11.8	0	-41.44	-	-	-7	-34.44	172	271	V
3	7.12503	-81.25	RMS	35.6	-19	11.8	.14	-52.71	-27	-25.71	-	-	172	271	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

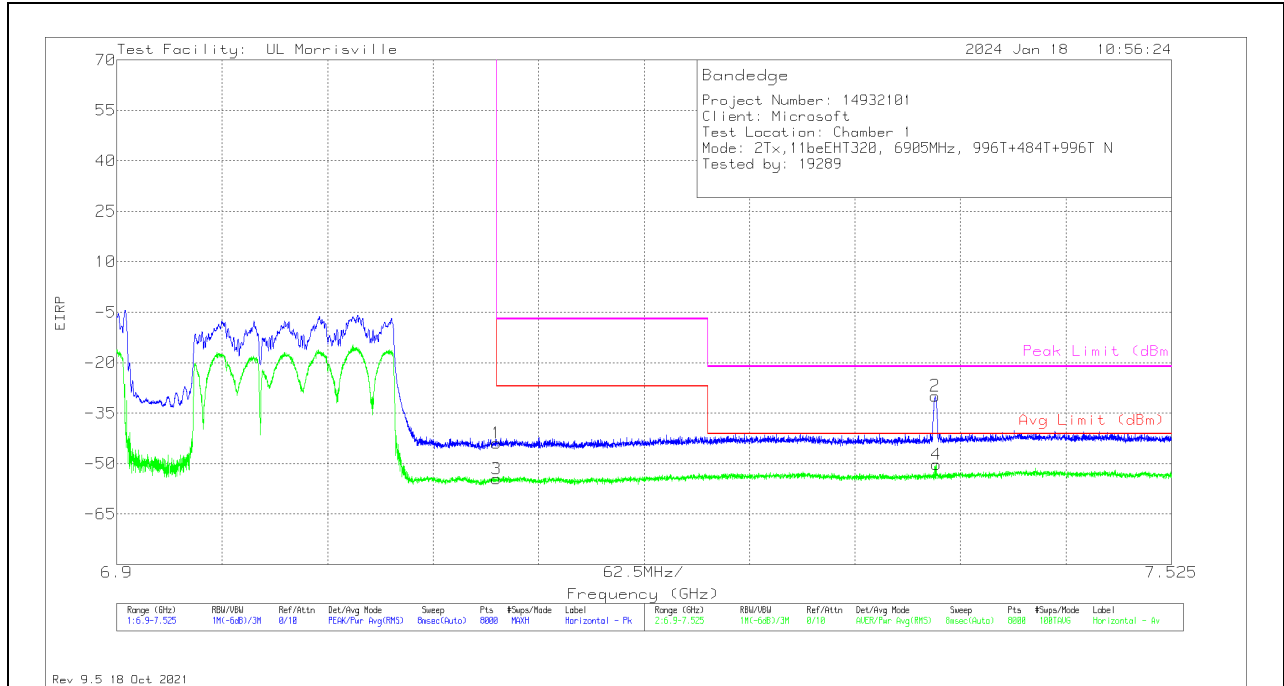

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38491	-60.17	Pk	35.7	-17.2	11.8	0	-29.87	-	-	-21.2	-8.67	255	318	H
4	* ** 7.38561	-80.76	RMS	35.7	-17.2	11.8	.14	-50.32	-41.2	-9.12	-	-	255	318	H
1	7.12503	-72.31	Pk	35.6	-19	11.8	0	-43.91	-	-	-7	-36.91	255	318	H
3	7.12503	-83.12	RMS	35.6	-19	11.8	.14	-54.58	-27	-27.58	-	-	255	318	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

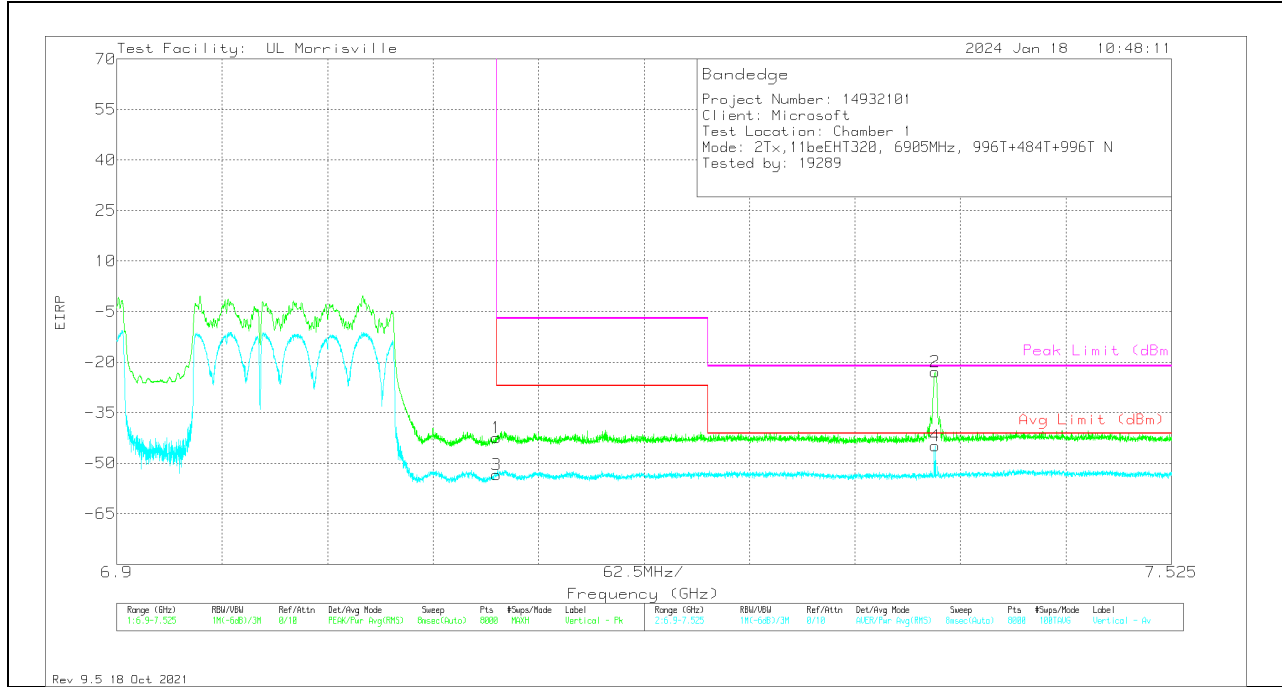

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38506	-53.1	Pk	35.7	-17.2	11.8	0	-22.8	-	-	-21.2	-1.6	351	236	V
4	* ** 7.38514	-75.3	RMS	35.7	-17.2	11.8	.14	-44.86	-41.2	-3.66	-	-	351	236	V
1	7.12503	-70.87	Pk	35.6	-19	11.8	0	-42.47	-	-	-7	-35.47	351	236	V
3	7.12503	-81.95	RMS	35.6	-19	11.8	.14	-53.41	-27	-26.41	-	-	351	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

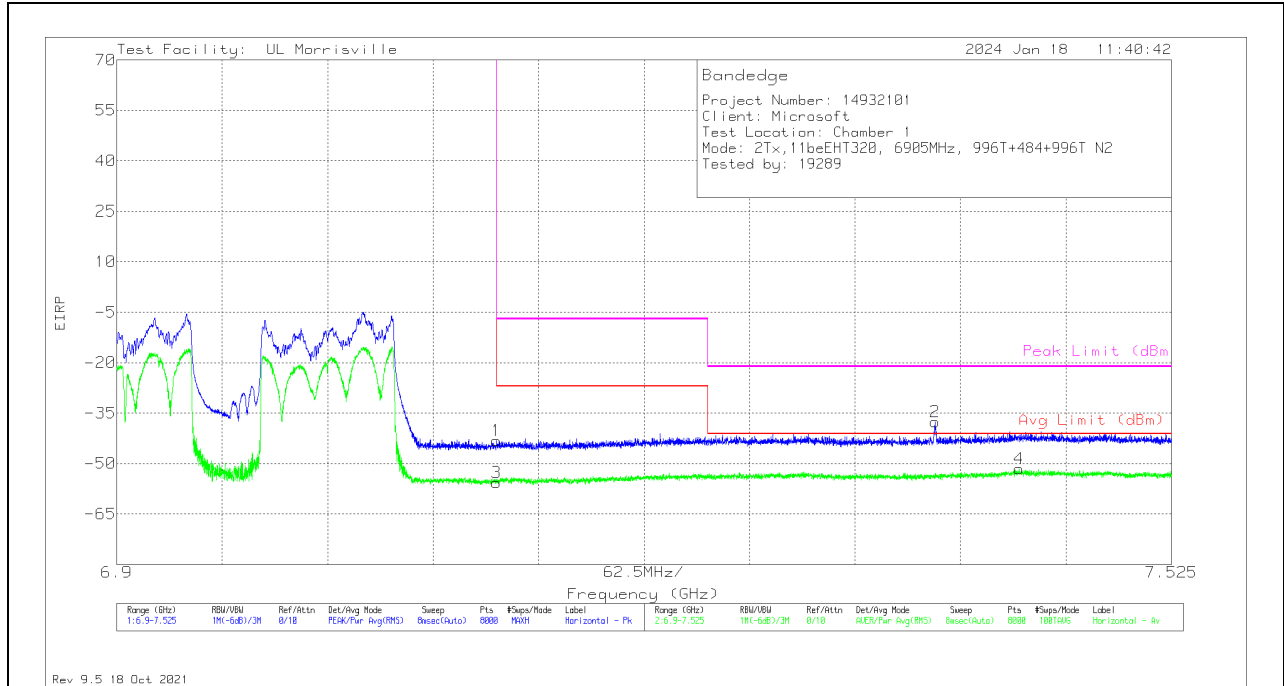

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38498	-67.89	Pk	35.7	-17.2	11.8	0	-37.59	-	-	-21.2	-16.39	266	391	H
4	* ** 7.43476	-82.57	RMS	35.7	-16.7	11.8	.14	-51.63	-41.2	-10.43	-	-	266	391	H
1	7.12503	-71.54	Pk	35.6	-19	11.8	0	-43.14	-	-	-7	-36.14	266	391	H
3	7.12503	-84.2	RMS	35.6	-19	11.8	.14	-55.66	-27	-28.66	-	-	266	391	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

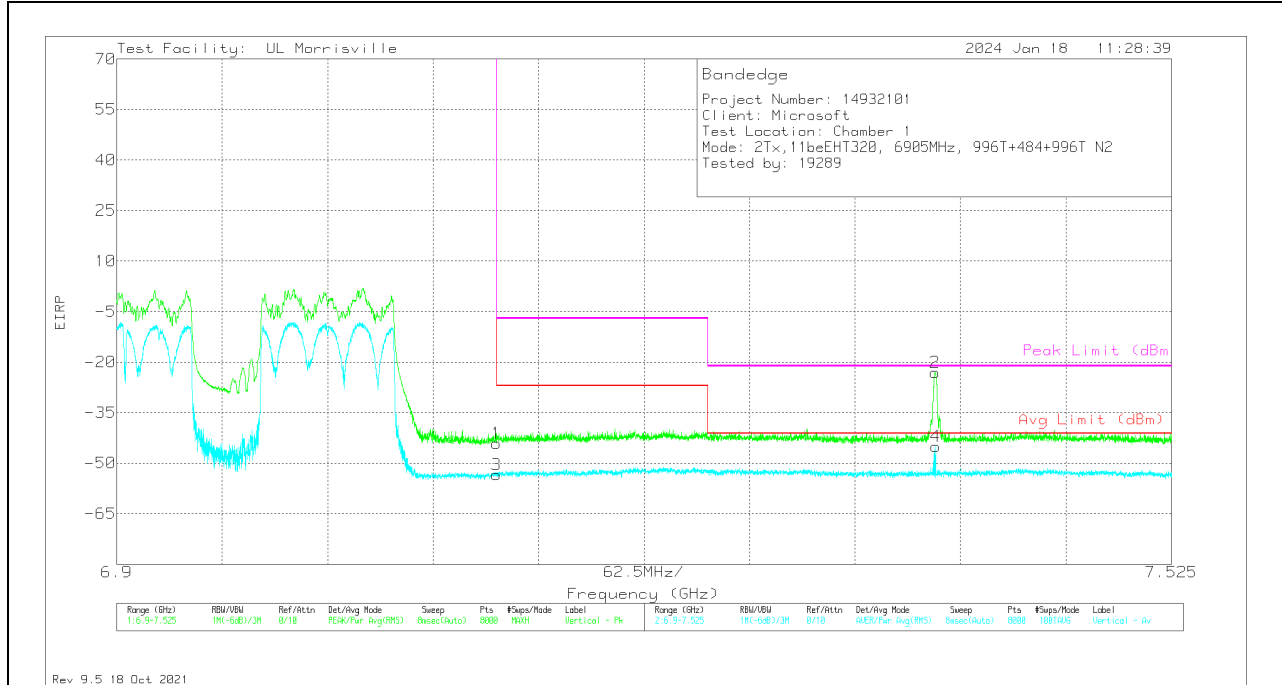

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38491	-53.33	Pk	35.7	-17.2	11.8	0	-23.03	-	-	-21.2	-1.83	338	235	V
4	* ** 7.38522	-75.49	RMS	35.7	-17.2	11.8	.14	-45.05	-41.2	-3.85	-	-	338	235	V
1	7.12503	-72.44	Pk	35.6	-19	11.8	0	-44.04	-	-	-7	-37.04	338	235	V
3	7.12503	-81.92	RMS	35.6	-19	11.8	.14	-53.38	-27	-26.38	-	-	338	235	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

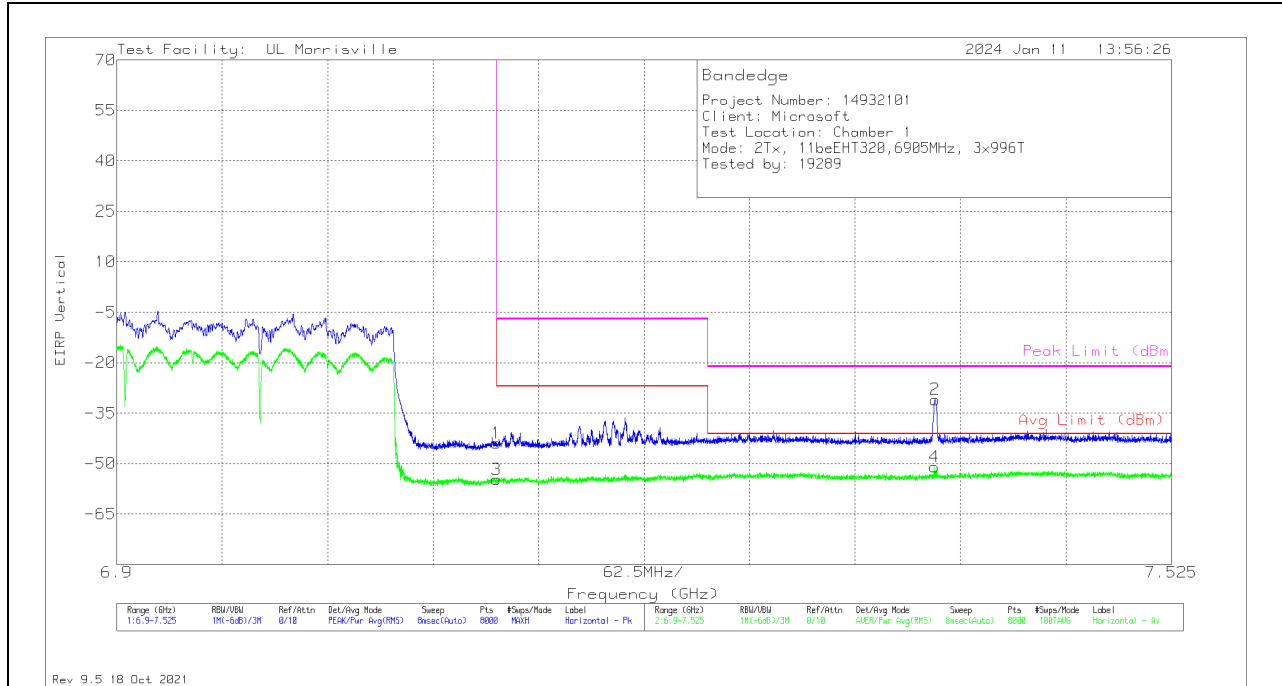

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38506	-61.28	Pk	35.7	-17.2	11.8	0	-30.98	-	-	-21.2	-9.78	0	236	H
4	* ** 7.38475	-81.49	RMS	35.7	-17.2	11.8	.17	-51.02	-41.2	-9.82	-	-	0	236	H
1	7.12503	-72.37	Pk	35.6	-19	11.8	0	-43.97	-	-	-7	-36.97	0	236	H
3	7.12503	-83.32	RMS	35.6	-19	11.8	.17	-54.75	-27	-27.75	-	-	0	236	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

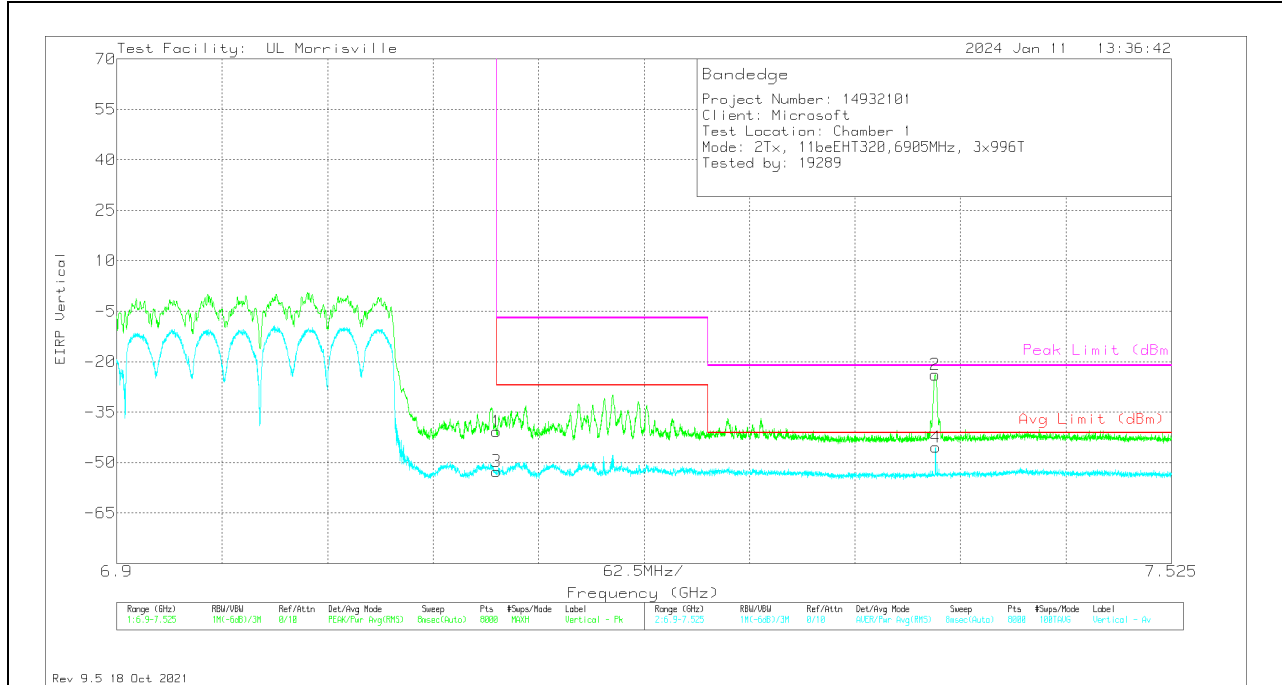


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38491	-54.2	Pk	35.7	-17.2	11.8	0	-23.9	-	-	-21.2	-2.7	126	129	V
4	* ** 7.38537	-75.91	RMS	35.7	-17.2	11.8	.17	-45.44	-41.2	-4.24	-	-	126	129	V
1	7.12503	-69.09	Pk	35.6	-19	11.8	0	-40.69	-	-	-7	-33.69	126	129	V
3	7.12503	-81.16	RMS	35.6	-19	11.8	.17	-52.59	-27	-25.59	-	-	126	129	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

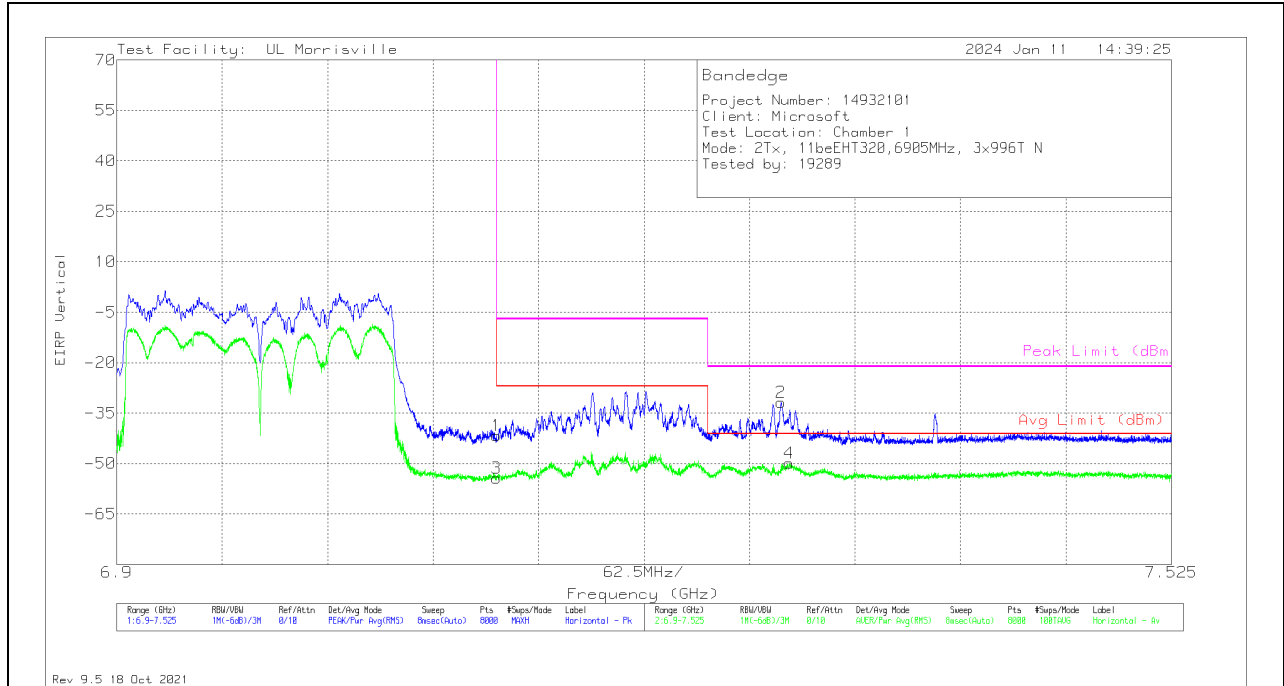

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.29364	-61.4	Pk	35.6	-17.8	11.8	0	-31.8	-	-	-21.2	-10.6	262	392	H
4	* ** 7.29857	-79.84	RMS	35.6	-17.7	11.8	.17	-49.97	-41.2	-8.77	-	-	262	392	H
1	7.12503	-70.03	Pk	35.6	-19	11.8	0	-41.63	-	-	-7	-34.63	262	392	H
3	7.12503	-82.89	RMS	35.6	-19	11.8	.17	-54.32	-27	-27.32	-	-	262	392	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

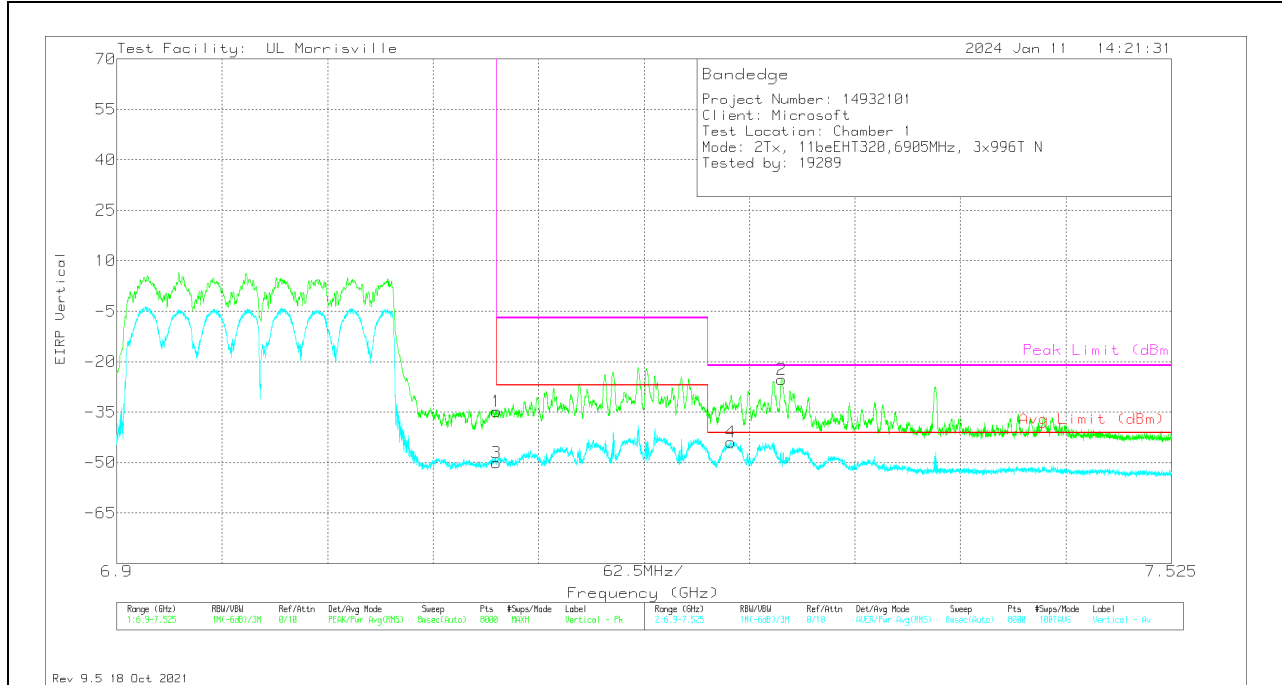

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.29396	-54.85	Pk	35.6	-17.8	11.8	0	-25.25	-	-	-21.2	-4.05	343	223	V
4	* ** 7.26395	-73.78	RMS	35.6	-17.7	11.8	.17	-43.91	-41.2	-2.71	-	-	343	223	V
1	7.12503	-63.25	Pk	35.6	-19	11.8	0	-34.85	-	-	-7	-27.85	343	223	V
3	7.12503	-78.71	RMS	35.6	-19	11.8	.17	-50.14	-27	-23.14	-	-	343	223	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T (NON-CONTIGUOUS 2)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

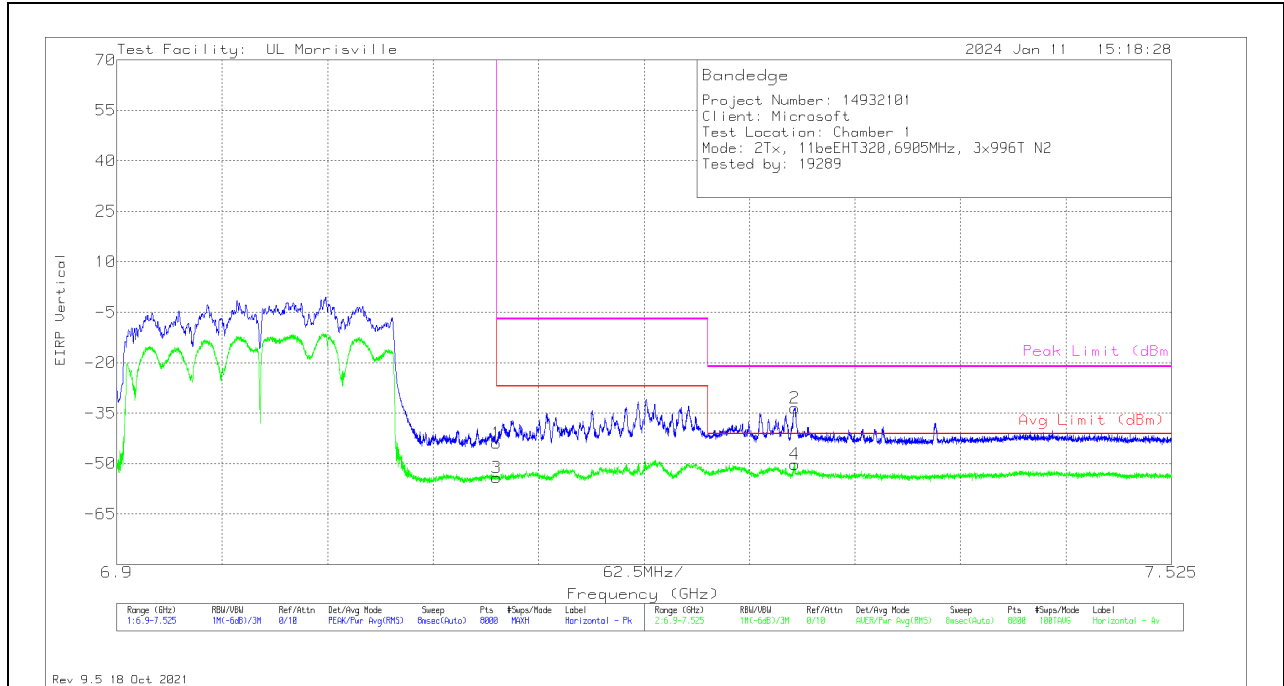

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.30161	-63.32	Pk	35.6	-17.6	11.8	0	-33.52	-	-	-21.2	-12.32	236	386	H
4	* ** 7.30185	-80.14	RMS	35.6	-17.6	11.8	.17	-50.17	-41.2	-8.97	-	-	236	386	H
1	7.12503	-72.29	Pk	35.6	-19	11.8	0	-43.89	-	-	-7	-36.89	236	386	H
3	7.12503	-82.69	RMS	35.6	-19	11.8	.17	-54.12	-27	-27.12	-	-	236	386	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

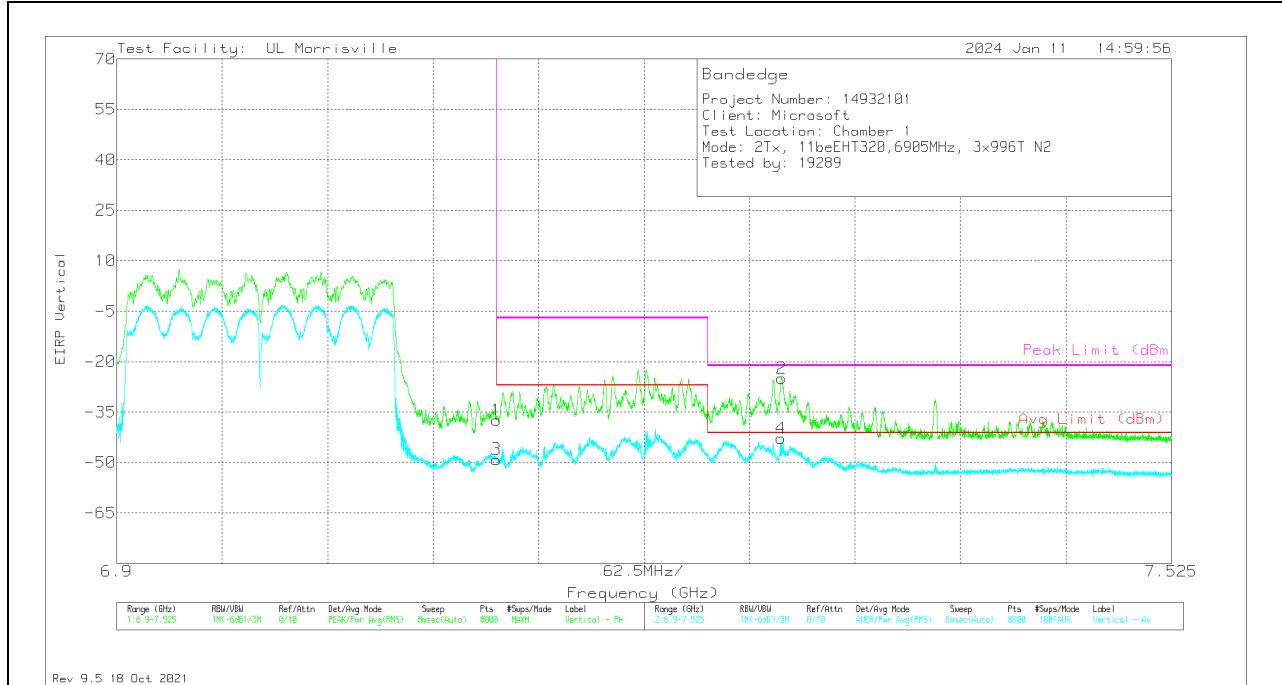

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.29388	-54.56	Pk	35.6	-17.8	11.8	0	-24.96	-	-	-21.2	-3.76	358	241	V
4	* ** 7.29372	-72.54	RMS	35.6	-17.8	11.8	.17	-42.77	-41.2	-1.57	-	-	358	241	V
1	7.12503	-65.84	Pk	35.6	-19	11.8	0	-37.44	-	-	-7	-30.44	358	241	V
3	7.12503	-77.62	RMS	35.6	-19	11.8	.17	-49.05	-27	-22.05	-	-	358	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T+484T (CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

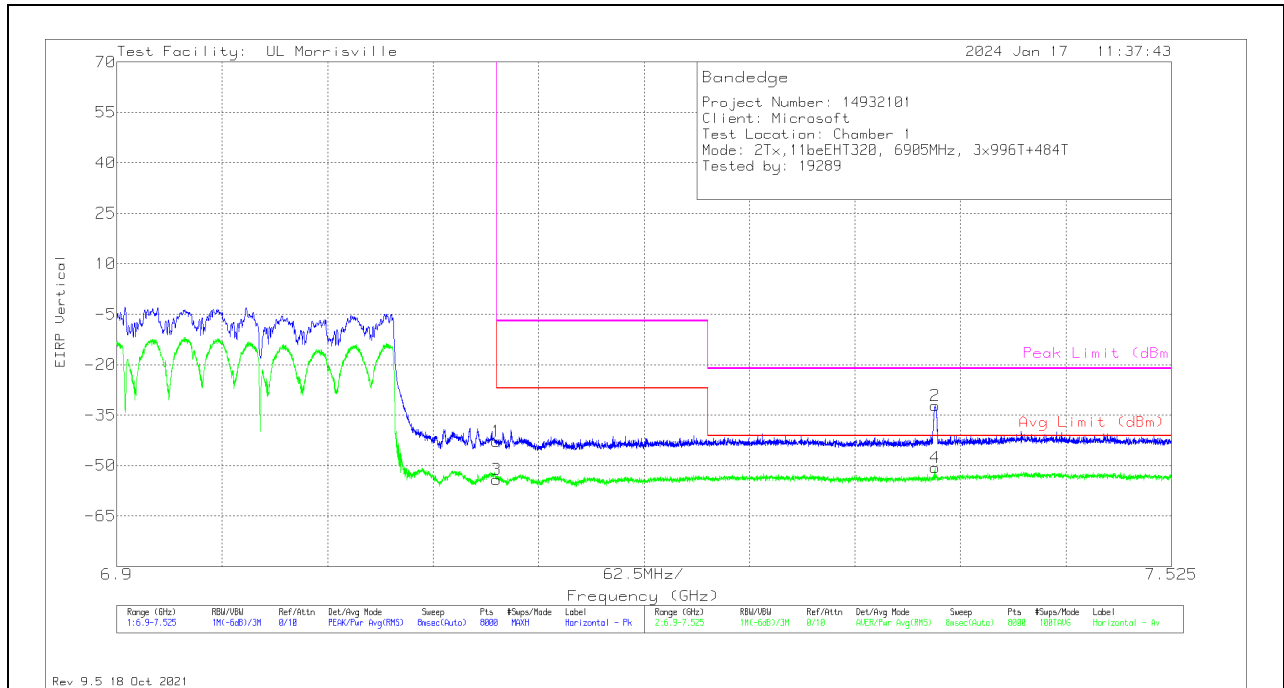

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38491	-62.46	Pk	35.7	-17.2	11.8	0	-32.16	-	-	-21.2	-10.96	18	317	H
4	* ** 7.38491	-81.18	RMS	35.7	-17.2	11.8	.18	-50.7	-41.2	-9.5	-	-	18	317	H
1	7.12503	-71.16	Pk	35.6	-19	11.8	0	-42.76	-	-	-7	-35.76	18	317	H
3	7.12503	-82.74	RMS	35.6	-19	11.8	.18	-54.16	-27	-27.16	-	-	18	317	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

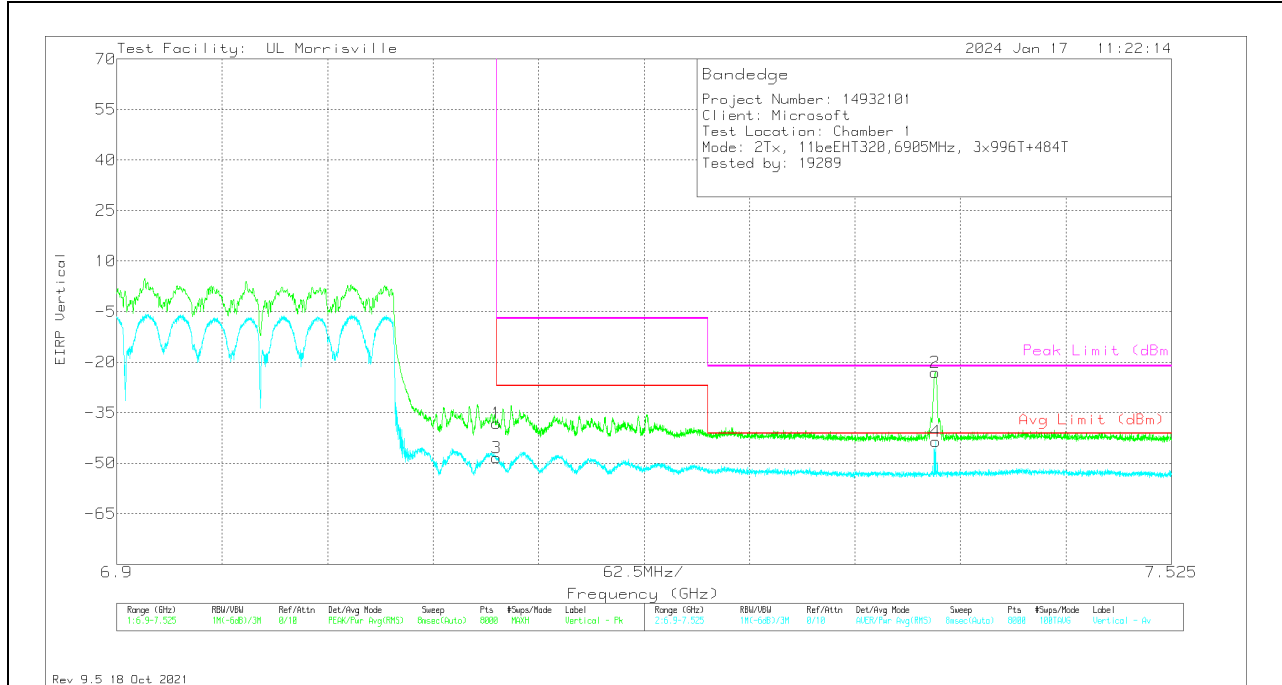

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38514	-53.32	Pk	35.7	-17.2	11.8	0	-23.02	-	-	-21.2	-1.82	341	224	V
4	* ** 7.38545	-74.08	RMS	35.7	-17.2	11.8	.18	-43.6	-41.2	-2.4	-	-	341	224	V
1	7.12503	-66.62	Pk	35.6	-19	11.8	0	-38.22	-	-	-7	-31.22	341	224	V
3	7.12503	-76.93	RMS	35.6	-19	11.8	.18	-48.35	-27	-21.35	-	-	341	224	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

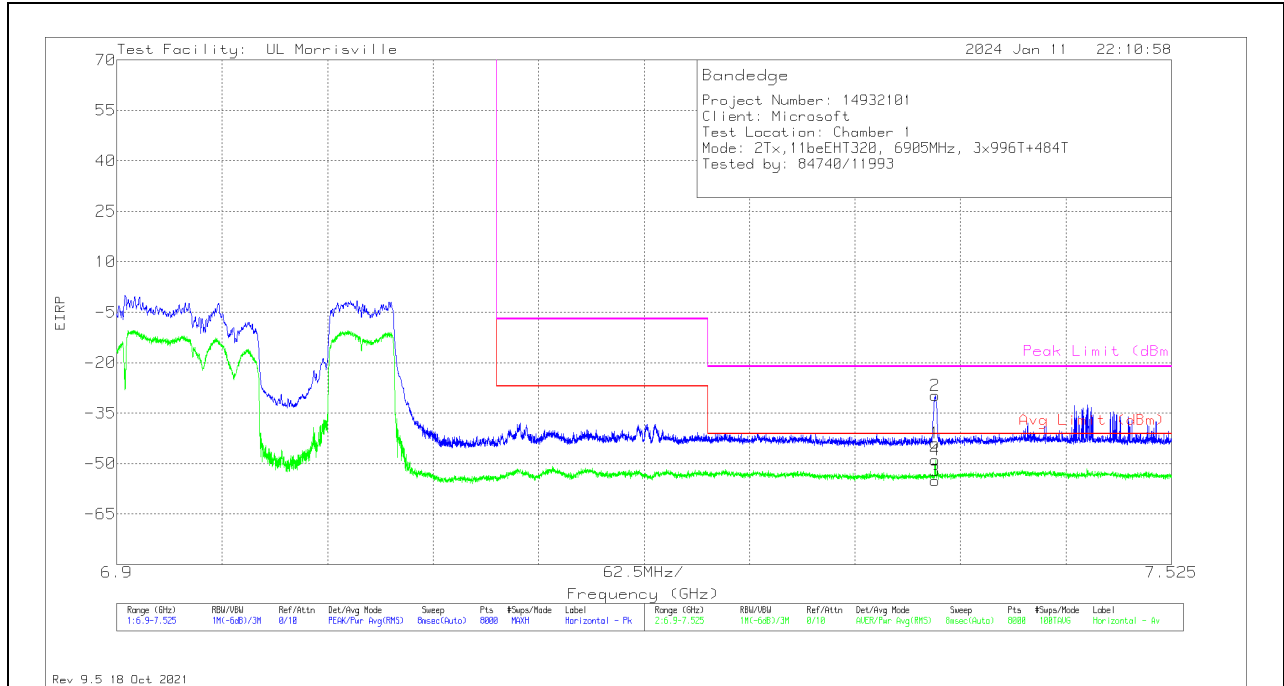

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 7.38487	-74.2	Pk	35.7	-17.2	11.8	0	-43.9	-	-	-21.2	-22.7	241	394	H
2	*** 7.38487	-60.14	Pk	35.7	-17.2	11.8	0	-29.84	-	-	-21.2	-8.64	241	394	H
3	*** 7.38487	-85.64	RMS	35.7	-17.2	11.8	.18	-55.16	-41.2	-13.96	-	-	241	394	H
4	*** 7.38487	-79.43	RMS	35.7	-17.2	11.8	.18	-48.95	-41.2	-7.75	-	-	241	394	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

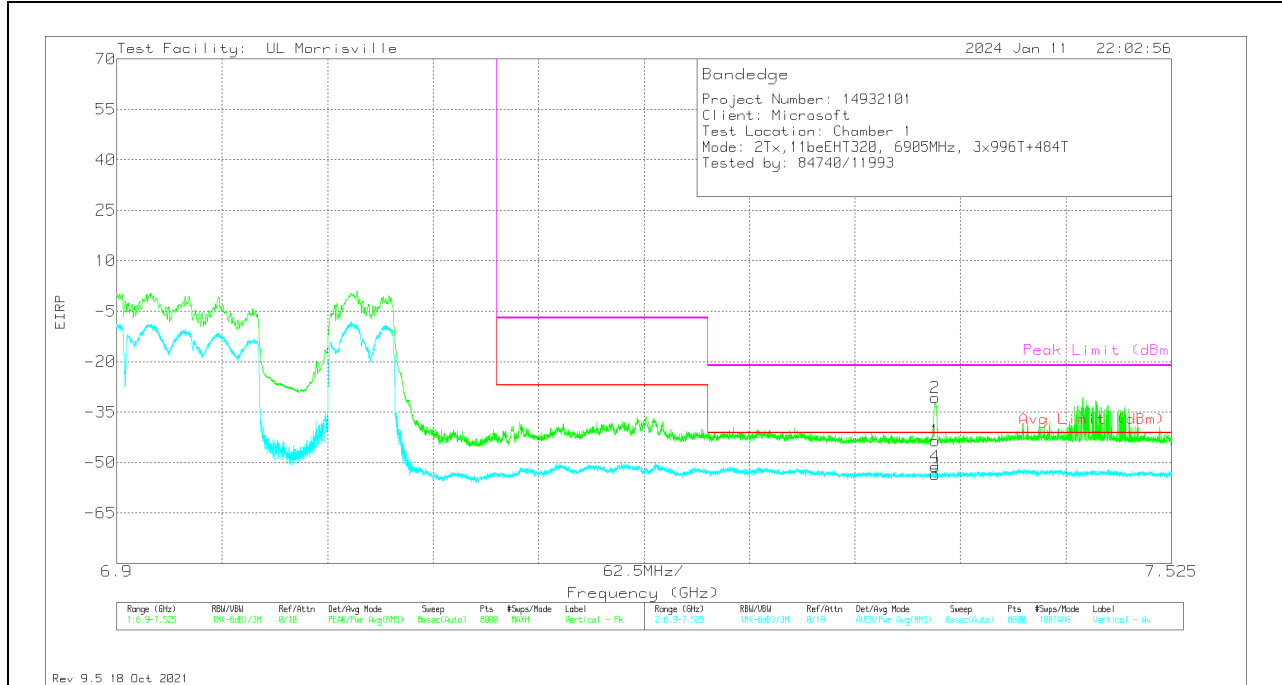

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 7.38487	-73.77	Pk	35.7	-17.2	11.8	0	-43.47	-	-	-21.2	-22.27	2	360	V
2	*** 7.38487	-60.93	Pk	35.7	-17.2	11.8	0	-30.63	-	-	-21.2	-9.43	2	360	V
3	*** 7.38487	-83.99	RMS	35.7	-17.2	11.8	.18	-53.51	-41.2	-12.31	-	-	2	360	V
4	*** 7.38487	-81.73	RMS	35.7	-17.2	11.8	.18	-51.25	-41.2	-10.05	-	-	2	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

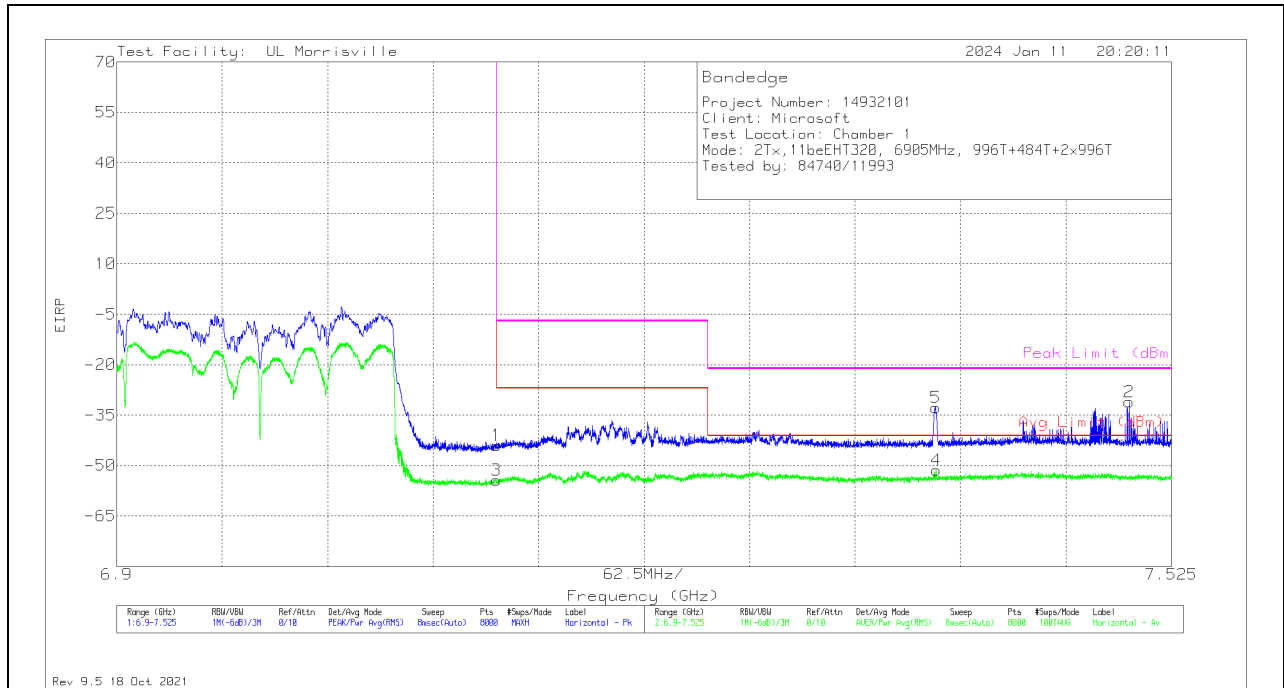

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.49992	-61.64	Pk	35.6	-16.9	11.8	0	-31.14	-	-	-21.2	-9.94	222	400	H
5	*** 7.3853	-63.02	Pk	35.7	-17.2	11.8	0	-32.72	-	-	-21.2	-11.52	222	400	H
4	*** 7.38569	-81.79	RMS	35.7	-17.2	11.8	.18	-51.31	-41.2	-10.11	-	-	222	400	H
1	7.12503	-72.42	Pk	35.6	-19	11.8	0	-44.02	-	-	-7	-37.02	222	400	H
3	7.12503	-82.95	RMS	35.6	-19	11.8	.18	-54.37	-27	-27.37	-	-	222	400	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

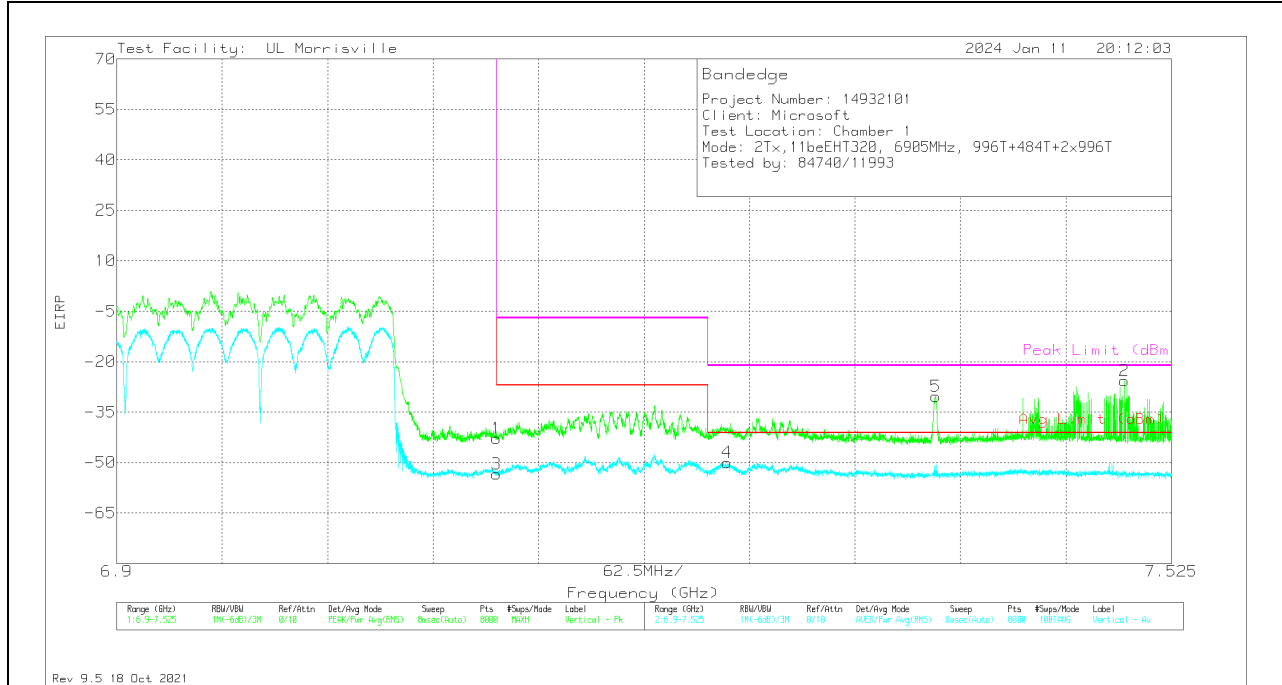


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	*** 7.49719	-56.26	Pk	35.6	-16.8	11.8	0	-25.66	-	-	-21.2	-4.46	140	159	V
5	*** 7.38522	-60.55	Pk	35.7	-17.2	11.8	0	-30.25	-	-	-21.2	-9.05	140	159	V
4	*** 7.26169	-79.76	RMS	35.6	-17.8	11.8	.18	-49.98	-41.2	-8.78	-	-	140	159	V
1	7.12503	-71.19	Pk	35.6	-19	11.8	0	-42.79	-	-	-7	-35.79	140	159	V
3	7.12503	-81.99	RMS	35.6	-19	11.8	.18	-53.41	-27	-26.41	-	-	140	159	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2)

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

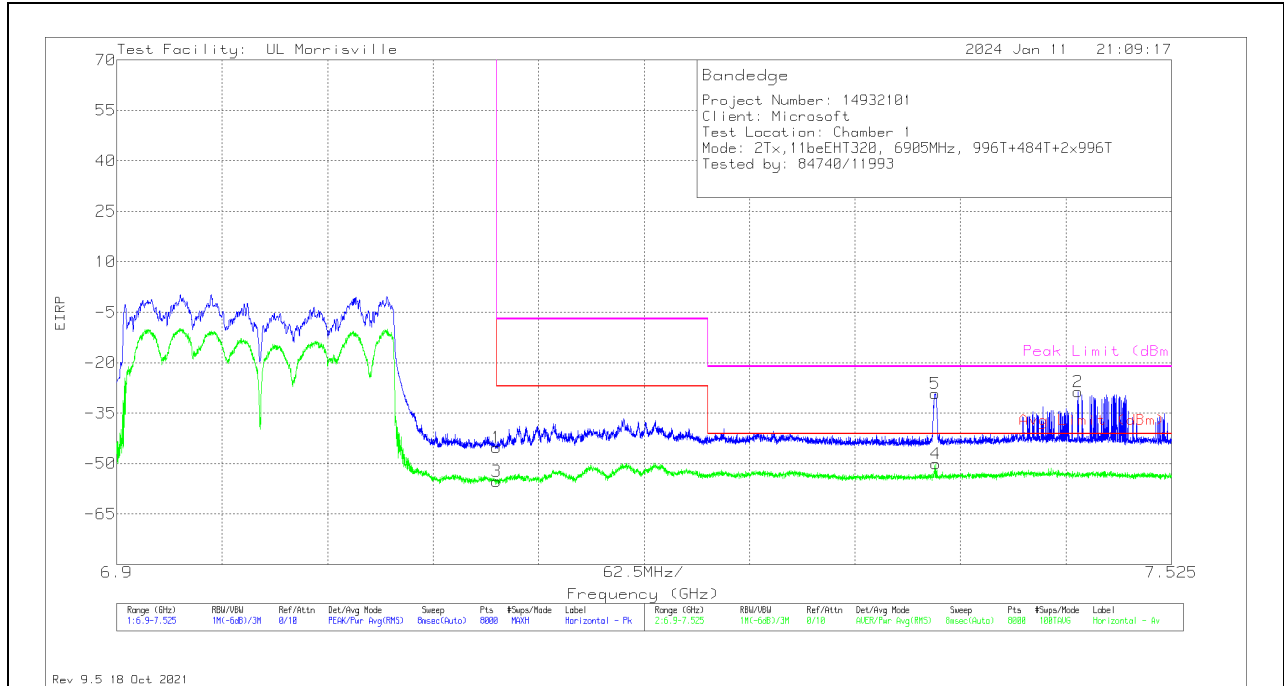

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	** * 7.46976	-59.19	Pk	35.7	-17	11.8	0	-28.69	-	-	-21.2	-7.49	33	395	H
5	** * 7.38487	-59.44	Pk	35.7	-17.2	11.8	0	-29.14	-	-	-21.2	-7.94	33	395	H
4	** * 7.38522	-80.49	RMS	35.7	-17.2	11.8	.18	-50.01	-41.2	-8.81	-	-	33	395	H
1	7.12503	-73.67	Pk	35.6	-19	11.8	0	-45.27	-	-	-7	-38.27	33	395	H
3	7.12503	-83.85	RMS	35.6	-19	11.8	.18	-55.27	-27	-28.27	-	-	33	395	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

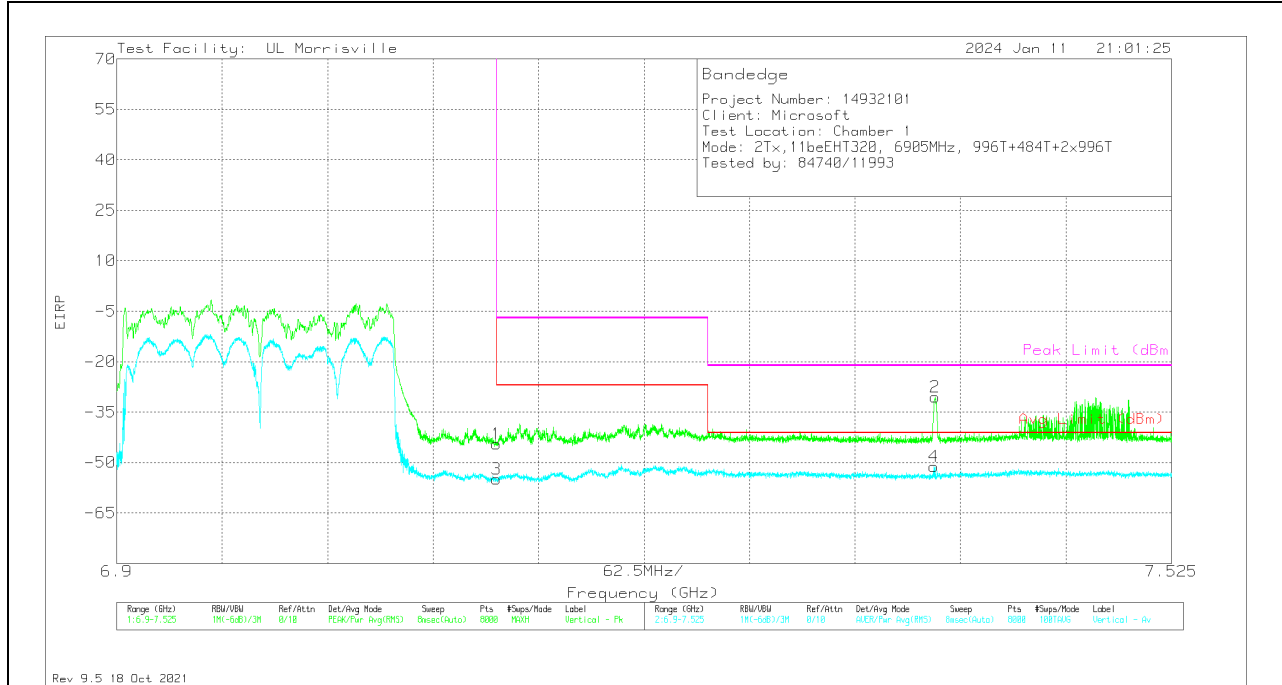


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	** * 7.38498	-60.87	Pk	35.7	-17.2	11.8	0	-30.57	-	-	-21.2	-9.37	121	400	V
4	** * 7.38412	-81.74	RMS	35.7	-17.2	11.8	.18	-51.26	-41.2	-10.06	-	-	121	400	V
1	7.12503	-72.94	Pk	35.6	-19	11.8	0	-44.54	-	-	-7	-37.54	121	400	V
3	7.12503	-83.56	RMS	35.6	-19	11.8	.18	-54.98	-27	-27.98	-	-	121	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

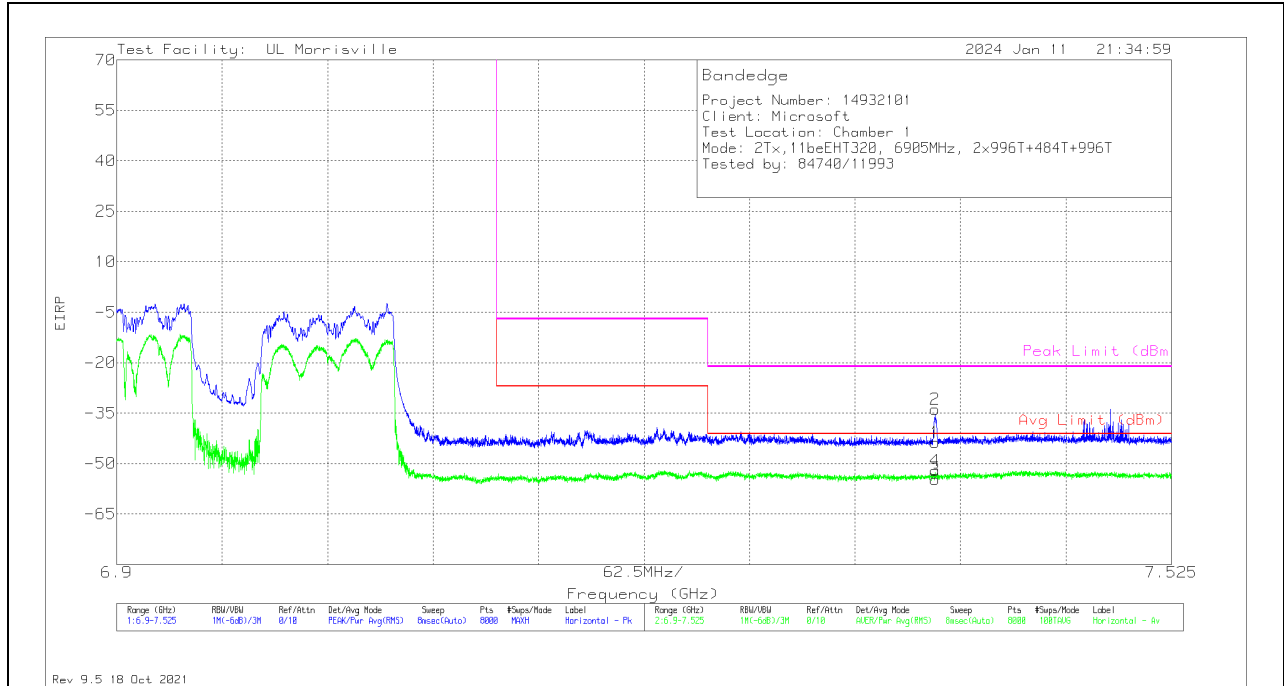

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 7.38487	-74.12	Pk	35.7	-17.2	11.8	0	-43.82	-	-	-21.2	-22.62	20	330	H
2	*** 7.38487	-64.12	Pk	35.7	-17.2	11.8	0	-33.82	-	-	-21.2	-12.62	20	330	H
3	*** 7.38487	-85.13	RMS	35.7	-17.2	11.8	.18	-54.65	-41.2	-13.45	-	-	20	330	H
4	*** 7.38487	-82.67	RMS	35.7	-17.2	11.8	.18	-52.19	-41.2	-10.99	-	-	20	330	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

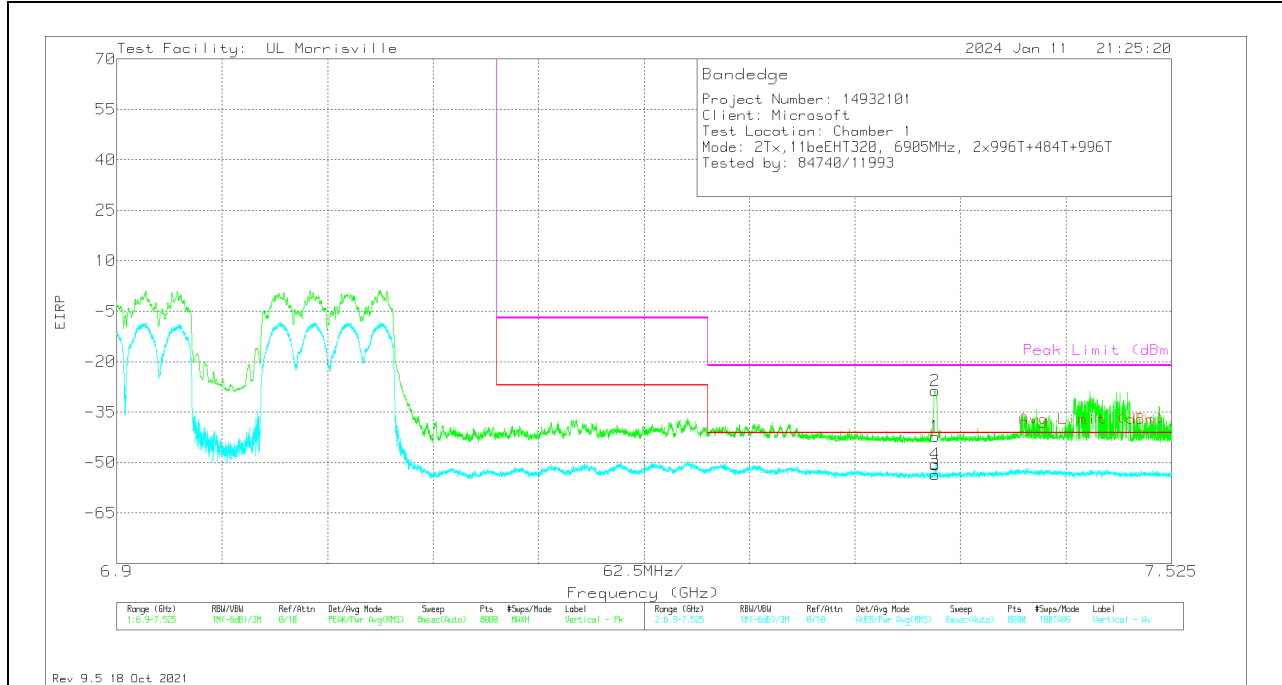


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 7.38487	-72.61	Pk	35.7	-17.2	11.8	0	-42.31	-	-	-21.2	-21.11	1	272	V
2	*** 7.38487	-58.88	Pk	35.7	-17.2	11.8	0	-28.58	-	-	-21.2	-7.38	1	272	V
3	*** 7.38487	-84.02	RMS	35.7	-17.2	11.8	.18	-53.54	-41.2	-12.34	-	-	1	272	V
4	*** 7.38487	-80.88	RMS	35.7	-17.2	11.8	.18	-50.4	-41.2	-9.2	-	-	1	272	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS 2)

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

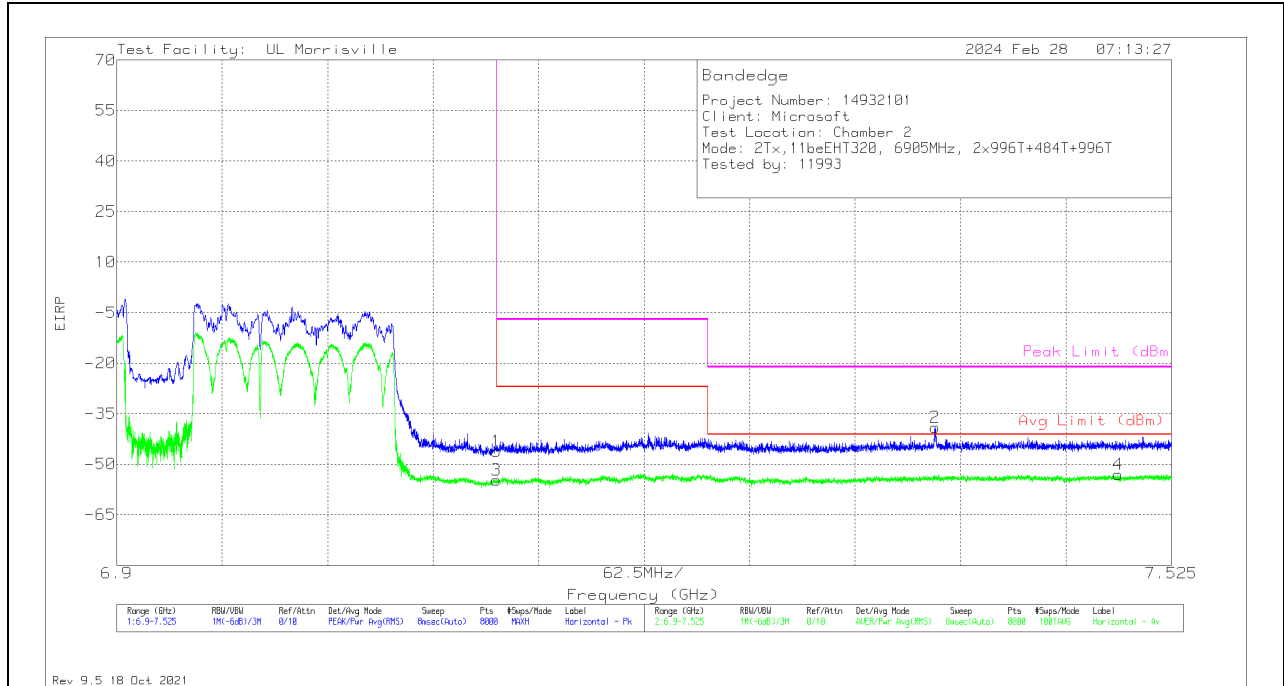

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38483	-69.22	Pk	35.6	-17.2	11.8	0	-39.02	-	-	-21.2	-17.82	82	315	H
4	* ** 7.49328	-84.05	RMS	35.7	-16.7	11.8	.18	-53.07	-41.2	-11.87	-	-	82	315	H
1	7.12503	-74.57	Pk	35.6	-19	11.8	0	-46.17	-	-	-7	-39.17	82	315	H
3	7.12503	-83.23	RMS	35.6	-19	11.8	.18	-54.65	-27	-27.65	-	-	82	315	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

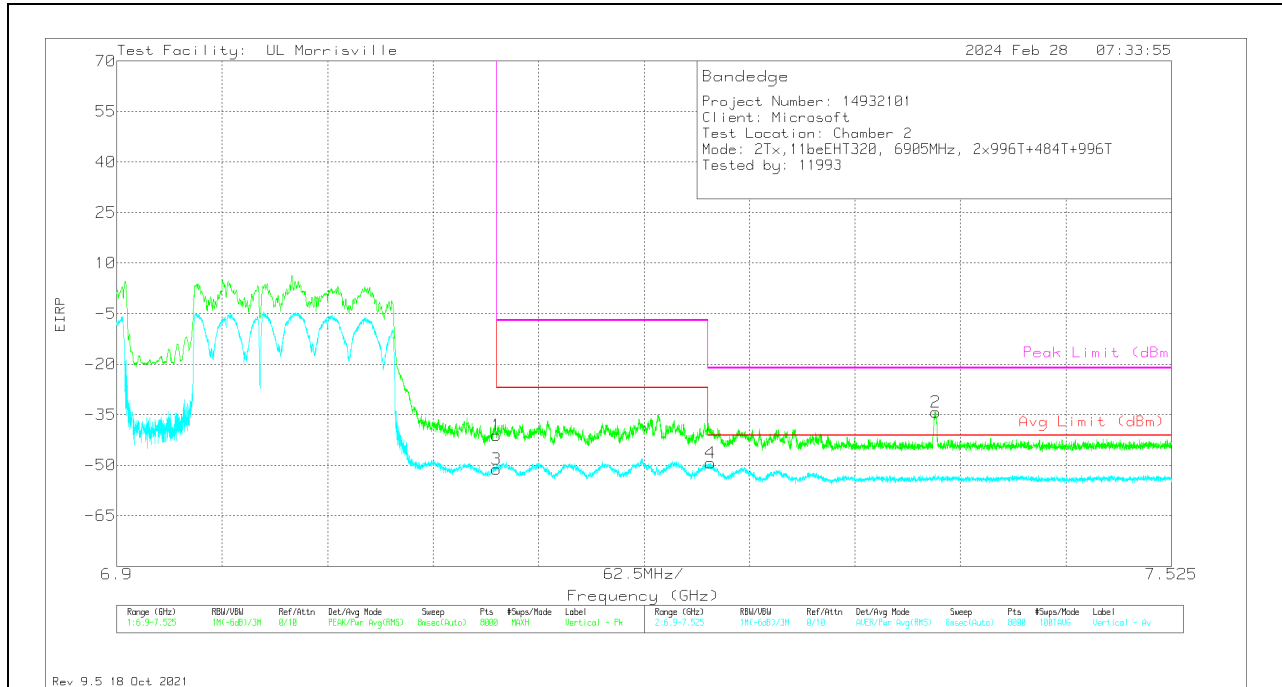

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	86408 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 7.38522	-64.42	Pk	35.6	-17.2	11.8	0	-34.22	-	-	-21.2	-13.02	47	275	V
4	* ** 7.25184	-79.04	RMS	35.6	-17.9	11.8	.18	-49.36	-41.2	-8.16	-	-	47	275	V
1	7.12503	-69.48	Pk	35.6	-19	11.8	0	-41.08	-	-	-7	-34.08	47	275	V
3	7.12503	-79.74	RMS	35.6	-19	11.8	.18	-51.16	-27	-24.16	-	-	47	275	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 OFDMA MODE: SU

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

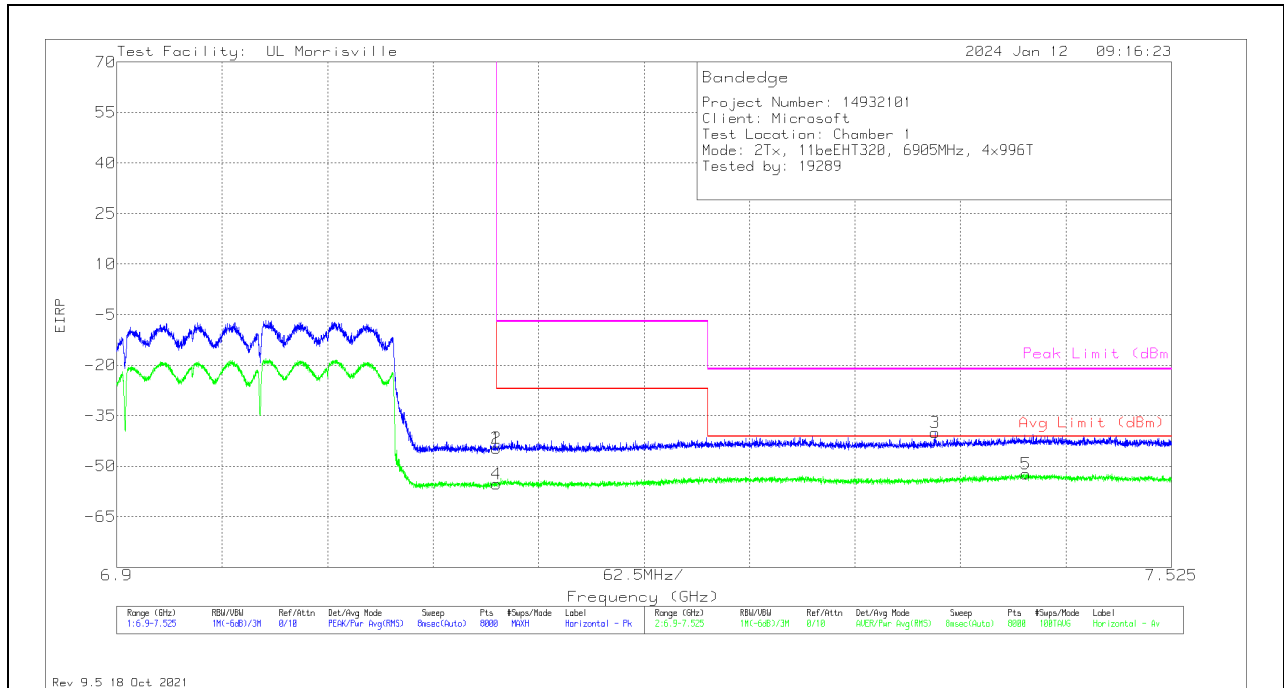

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 7.38483	-70.32	Pk	35.7	-17.2	11.8	0	-40.02	-	-	-21.2	-18.82	290	311	H
5	* ** 7.43898	-83.04	RMS	35.7	-16.8	11.8	.11	-52.23	-41.2	-11.03	-	-	290	311	H
1	7.12503	-73.07	Pk	35.6	-19	11.8	0	-44.67	-	-	-7	-37.67	290	311	H
2	7.12503	-73.07	Pk	35.6	-19	11.8	0	-44.67	-	-	-7	-37.67	290	311	H
4	7.12503	-83.86	RMS	35.6	-19	11.8	.11	-55.35	-27	-28.35	-	-	290	311	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

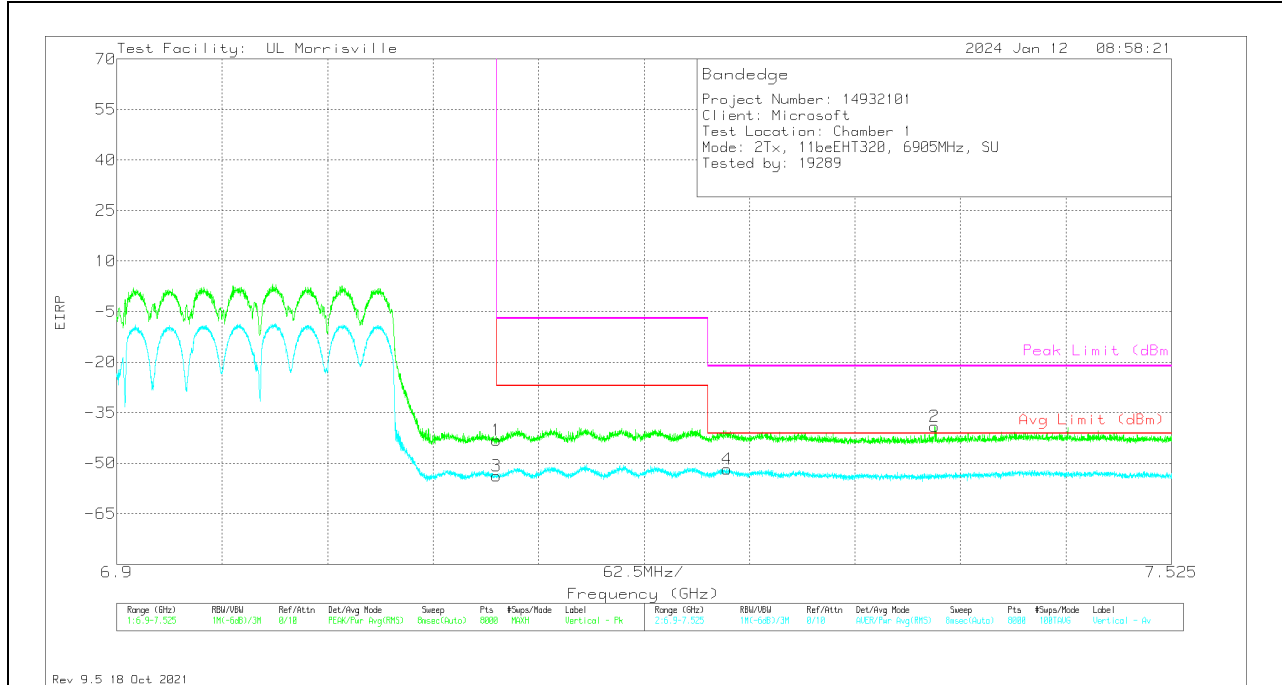

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	** * 7.38459	-69.42	Pk	35.7	-17.2	11.8	0	-39.12	-	-	-21.2	-17.92	292	137	V
4	** * 7.26177	-81.42	RMS	35.6	-17.8	11.8	.11	-51.71	-41.2	-10.51	-	-	292	137	V
1	7.12503	-71.65	Pk	35.6	-19	11.8	0	-43.25	-	-	-7	-36.25	292	137	V
3	7.12503	-82.24	RMS	35.6	-19	11.8	.11	-53.73	-27	-26.73	-	-	292	137	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW

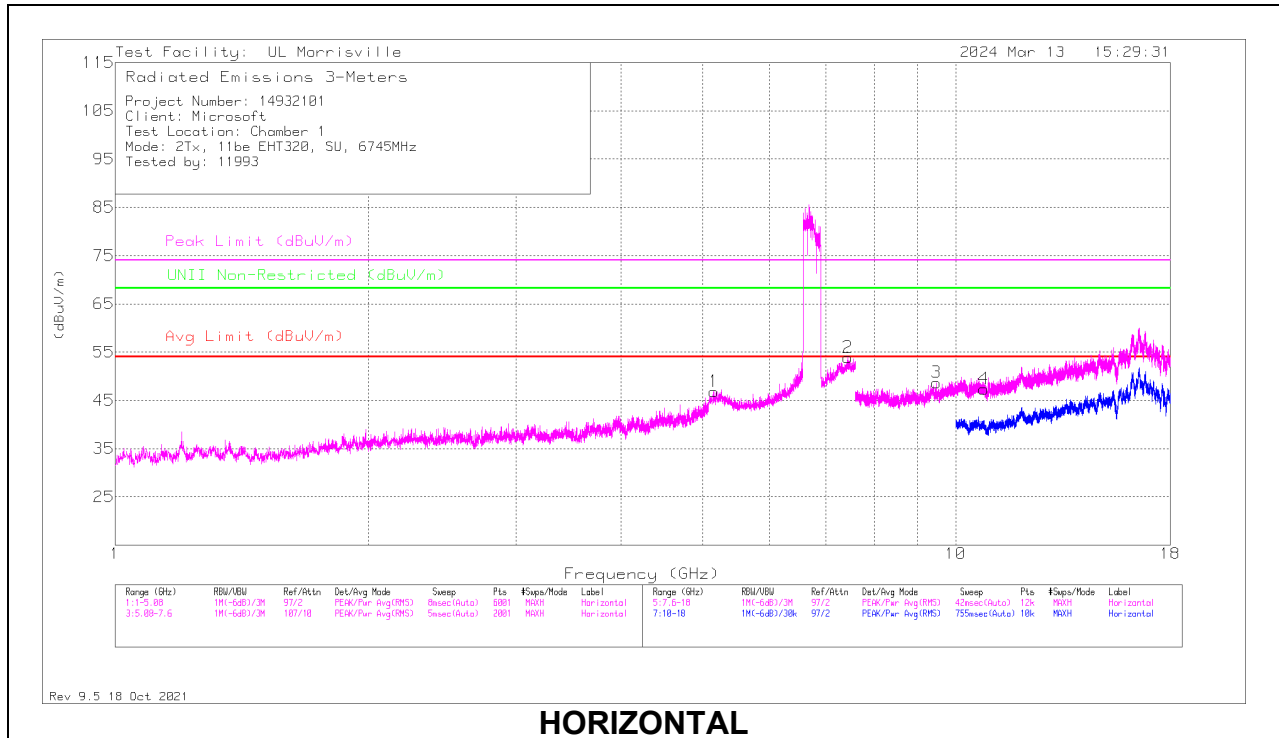

HORIZONTAL

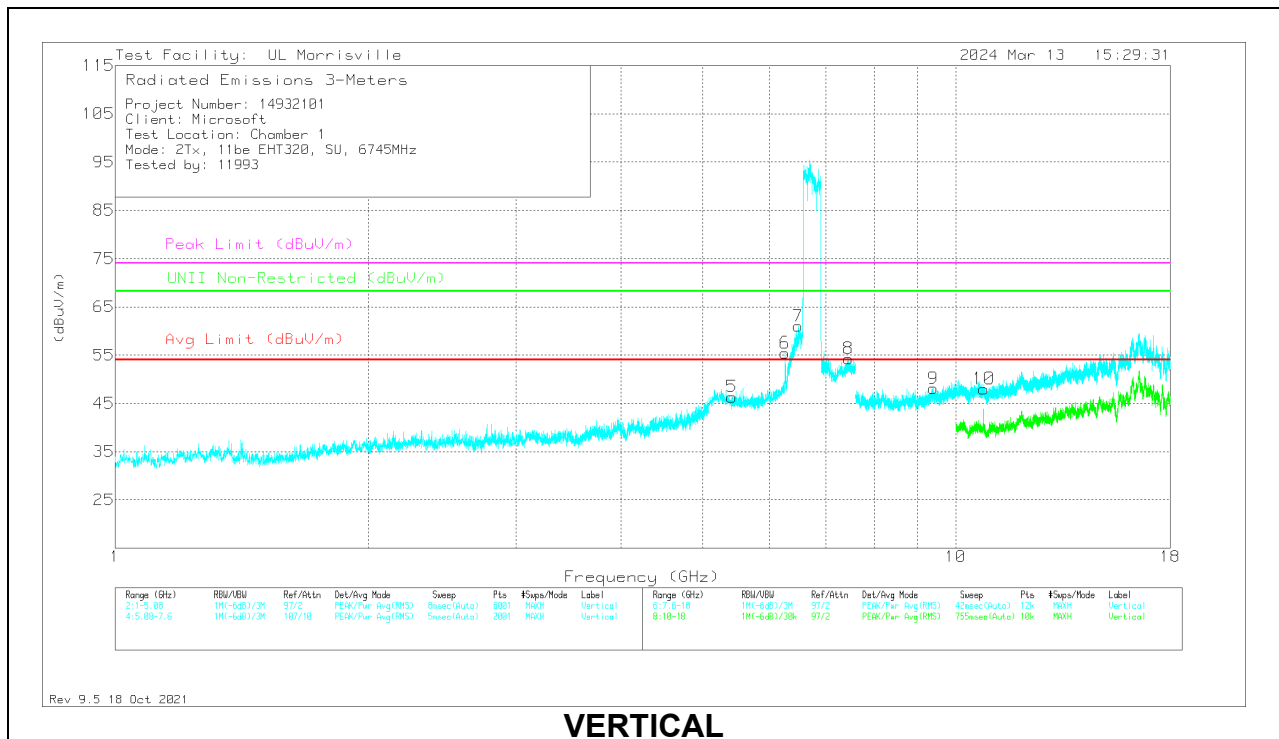

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Filter (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 5.15434	34.45	Pk	34.3	-21.9	0	0	46.85	-	-	-	-	68.2	-21.35	0-360	200	H
2	*** 7.44369	35.74	PK-U	35.7	-16.9	0	0	54.54	-	-	74	-19.46	-	-	357	138	H
	*** 7.44133	24.17	ADR	35.7	-16.8	0	.11	43.18	54	-10.82	-	-	-	-	357	138	H
5	*** 5.41642	34.95	Pk	34.5	-23.1	0	0	46.35	54	-7.65	74	-27.65	-	-	0-360	200	V
8	*** 7.45813	35.51	PK-U	35.7	-16.8	0	0	54.41	-	-	74	-19.59	-	-	287	235	V
	*** 7.45943	24.15	ADR	35.7	-16.9	0	.11	43.06	54	-10.94	-	-	-	-	287	235	V
3	*** 9.4797	37.95	PK-U	36.5	-26	.3	0	48.75	-	-	74	-25.25	-	-	16	253	H
	*** 9.47988	26.81	ADR	36.5	-26	.3	.11	37.72	54	-16.28	-	-	-	-	16	253	H
4	*** 10.80147	32.97	Pk	37.9	-23.8	.3	0	47.37	54	-6.63	74	-26.63	-	-	0-360	200	H
9	*** 9.40592	38.97	PK-U	36.4	-25.7	.4	0	50.07	-	-	74	-23.93	-	-	250	216	V
	*** 9.40797	27.33	ADR	36.4	-25.7	.4	.11	38.54	54	-15.46	-	-	-	-	250	216	V
10	*** 10.79869	35.67	PK-U	37.9	-23.9	.3	0	49.97	-	-	74	-24.03	-	-	118	150	V
	*** 10.79887	24.51	ADR	37.9	-23.9	.3	.11	38.92	54	-15.08	-	-	-	-	118	150	V
6	6.26818	42.12	Pk	35.4	-22.1	0	0	55.42	-	-	-	-	68.2	-12.78	0-360	200	V
7	6.49624	47.12	Pk	35.5	-21.6	0	0	61.02	-	-	-	-	68.2	-7.18	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADR - RMS average

HIGH

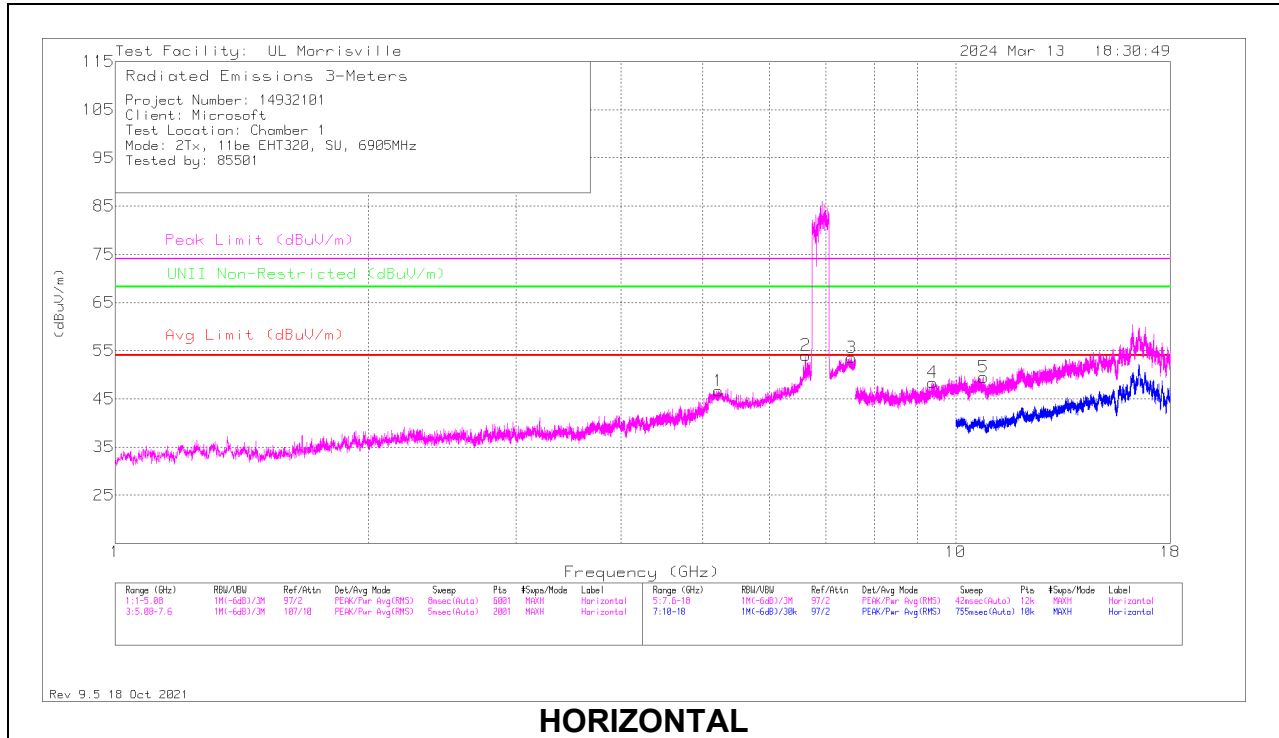

HORIZONTAL

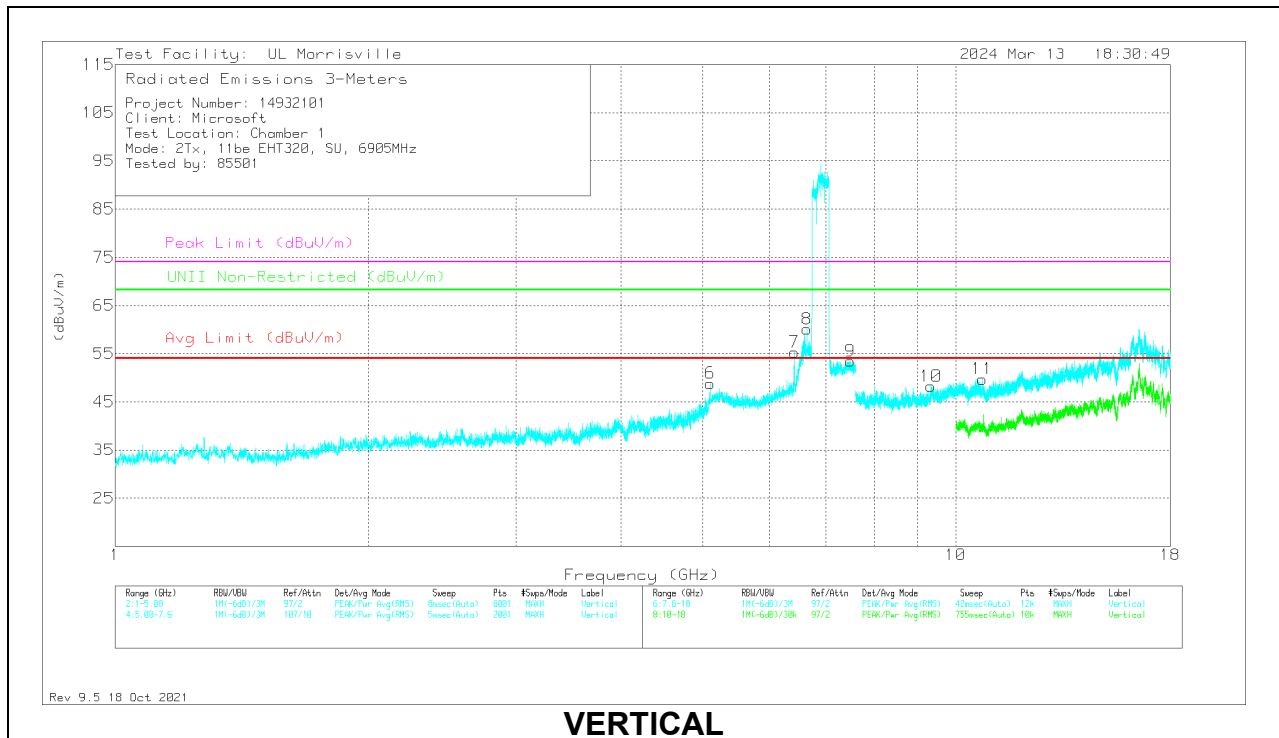

VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	Filter (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 5.21734	34.66	Pk	34.4	-22.4	0	0	46.66	-	-	-	-	68.2	-21.54	0-360	101	H
3	*** 7.51821	35.43	PK-U	35.6	-16.6	0	0	54.43	-	-	74	-19.57	-	-	194	154	H
	*** 7.51572	23.97	ADR	35.6	-16.6	0	.11	43.08	54	-10.92	-	-	-	-	194	154	H
6	*** 5.10263	36.36	PK-U	34.2	-22.1	0	0	48.46	-	-	74	-25.54	-	-	4	260	V
	*** 5.10172	24.91	ADR	34.2	-22.1	0	.11	37.12	54	-16.88	-	-	-	-	4	260	V
9	*** 7.49029	36.03	PK-U	35.6	-16.6	0	0	55.03	-	-	74	-18.97	-	-	258	241	V
	*** 7.49147	24.07	ADR	35.6	-16.6	0	.11	43.18	54	-10.82	-	-	-	-	258	241	V
4	*** 9.38349	39.14	PK-U	36.4	-26.1	.3	0	49.74	-	-	74	-24.26	-	-	7	360	H
	*** 9.38495	27.48	ADR	36.4	-26.1	.3	.11	38.19	54	-15.81	-	-	-	-	7	360	H
5	*** 10.79303	35.88	PK-U	37.9	-24.1	.3	0	49.98	-	-	74	-24.02	-	-	34	365	H
	*** 10.79082	24.63	ADR	37.9	-24.2	.4	.11	38.84	54	-15.16	-	-	-	-	34	365	H
10	*** 9.3446	38.21	PK-U	36.3	-26.1	.3	0	48.71	-	-	74	-25.29	-	-	326	200	V
	*** 9.34743	27.01	ADR	36.3	-26	.3	.11	37.72	54	-16.28	-	-	-	-	326	200	V
11	*** 10.76108	36.22	PK-U	37.9	-24.1	.3	0	50.32	-	-	74	-23.68	-	-	314	335	V
	*** 10.75964	24.55	ADR	37.9	-24.1	.3	.11	38.76	54	-15.24	-	-	-	-	314	335	V
7	6.42442	41.69	Pk	35.5	-21.9	0	0	55.29	-	-	-	-	68.2	-12.91	0-360	200	V
2	6.62728	39.69	Pk	35.6	-21.3	0	0	53.99	-	-	-	-	68.2	-14.21	0-360	101	H
8	6.65752	45.99	Pk	35.6	-21.5	0	0	60.09	-	-	-	-	68.2	-8.11	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADR - RMS average

11.2. WORST CASE BELOW 30MHZ

Note for below 30 MHz scans: All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.


11.2.15. SPURIOUS EMISSIONS BELOW 30 MHz (E-FIELD)

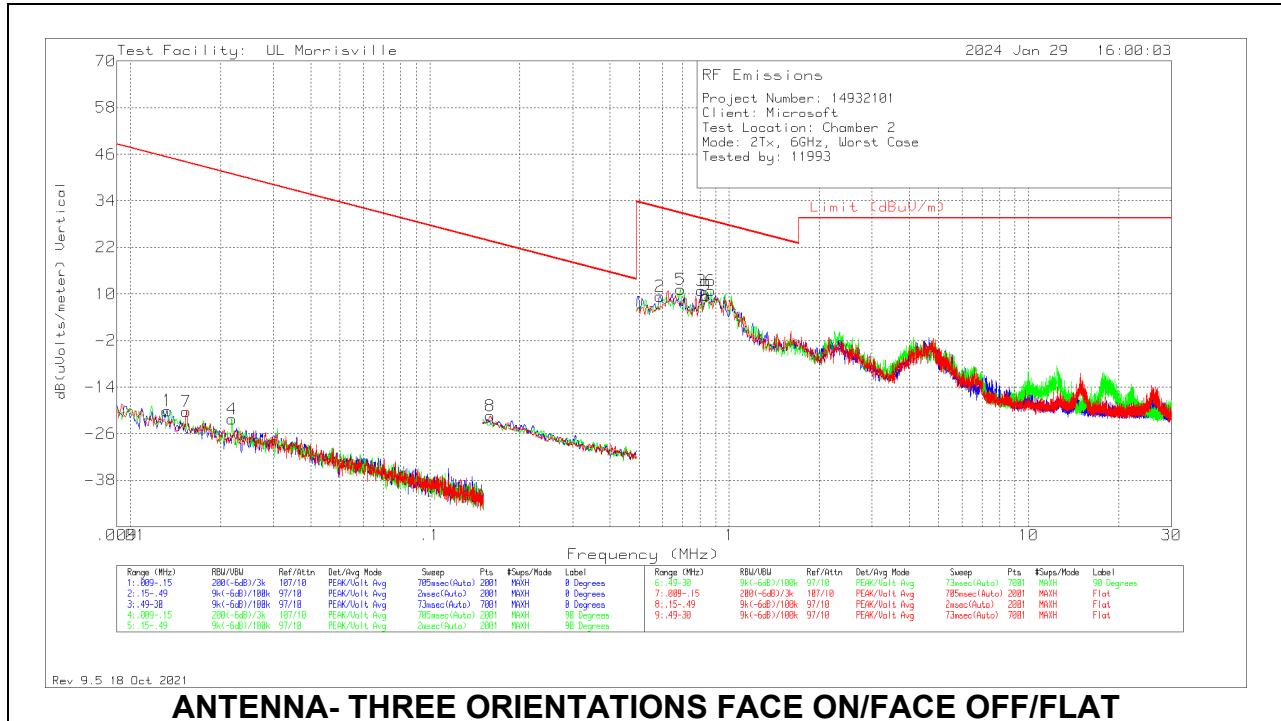

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	65682 (dBuV/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
1	.01326	42.53	Pk	17.3	.1	-80	-20.07	45.15	65.15	-65.22	0-360	0 degs
7	.01539	43.3	Pk	16.3	.1	-80	-20.3	43.86	63.86	-64.16	0-360	Flat
4	.02185	43.86	Pk	13.8	.1	-80	-22.24	40.82	60.82	-63.06	0-360	90 degs
8	.15935	48.2	Pk	10.2	.1	-80	-21.5	23.56	43.56	-45.06	0-360	Flat
2	.58697	39.06	Pk	10.2	.1	-40	9.36	32.23	-	-22.87	0-360	0 degs
5	.68815	40.88	Pk	10.2	.1	-40	11.18	30.85	-	-19.67	0-360	90 degs
3	.8062	40.5	Pk	10.2	.1	-40	10.8	29.48	-	-18.68	0-360	0 degs
9	.83571	39.19	Pk	10.2	.2	-40	9.59	29.16	-	-19.57	0-360	Flat
6	.86944	40.4	Pk	10.2	.2	-40	10.8	28.82	-	-18.02	0-360	90 degs

Pk - Peak detector


11.2.16. SPURIOUS EMISSIONS BELOW 30 MHz (H-FIELD)

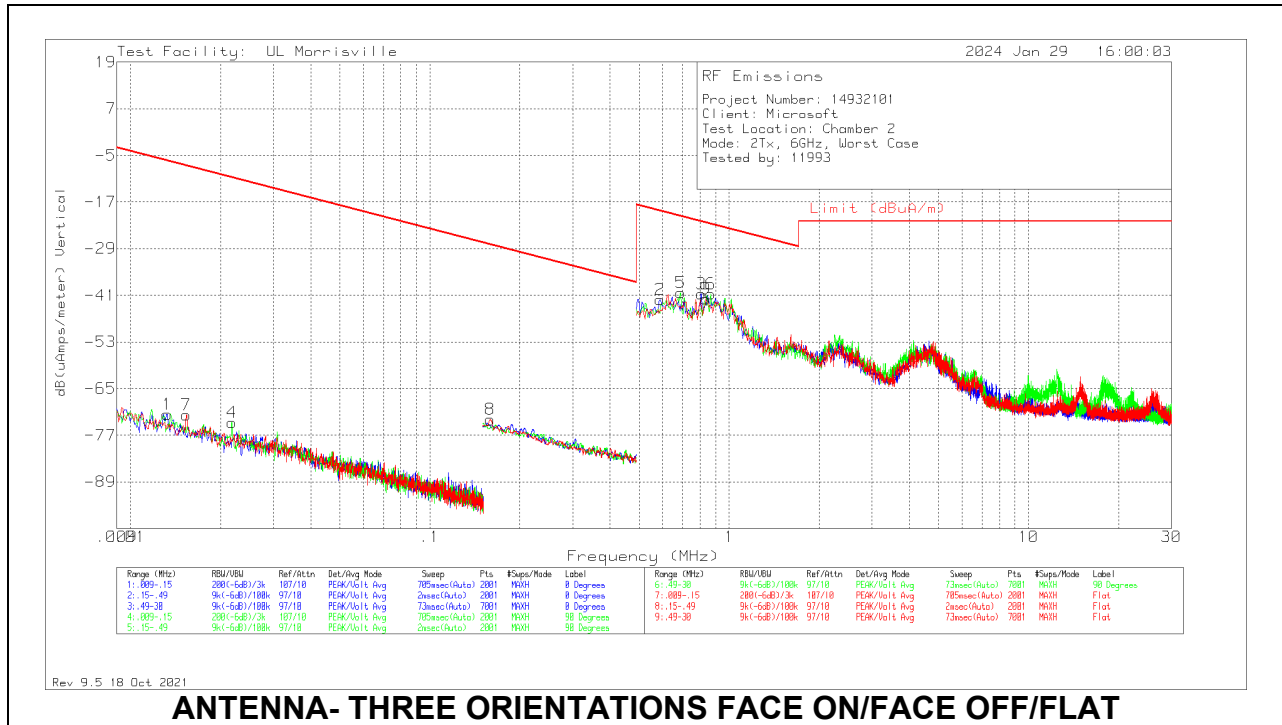


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	65682 (dBuV/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uAmps/meter)	QP/AV Limit (dBuA/m)	PK Limit (dBuA/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
1	.01326	42.53	Pk	-34.2	.1	-80	-71.57	-6.35	-13.65	-65.22	0-360	0 degs
7	.01539	43.3	Pk	-35.2	.1	-80	-71.8	-7.64	-12.36	-64.16	0-360	Flat
4	.02185	43.86	Pk	-37.7	.1	-80	-73.74	-10.68	9.32	-63.06	0-360	90 degs
8	.15935	48.2	Pk	-41.3	.1	-80	-73	-27.94	-7.94	-45.06	0-360	Flat
2	.58697	39.06	Pk	-41.3	.1	-40	-42.14	-19.27	-	-22.87	0-360	0 degs
5	.68815	40.88	Pk	-41.3	.1	-40	-40.32	-20.65	-	-19.67	0-360	90 degs
3	.8062	40.5	Pk	-41.3	.1	-40	-40.7	-22.02	-	-18.68	0-360	0 degs
9	.83571	39.19	Pk	-41.3	.2	-40	-41.91	-22.34	-	-19.57	0-360	Flat
6	.86944	40.4	Pk	-41.3	.2	-40	-40.7	-22.68	-	-18.02	0-360	90 degs

Pk - Peak detector

11.3. WORST CASE BELOW 1 GHZ

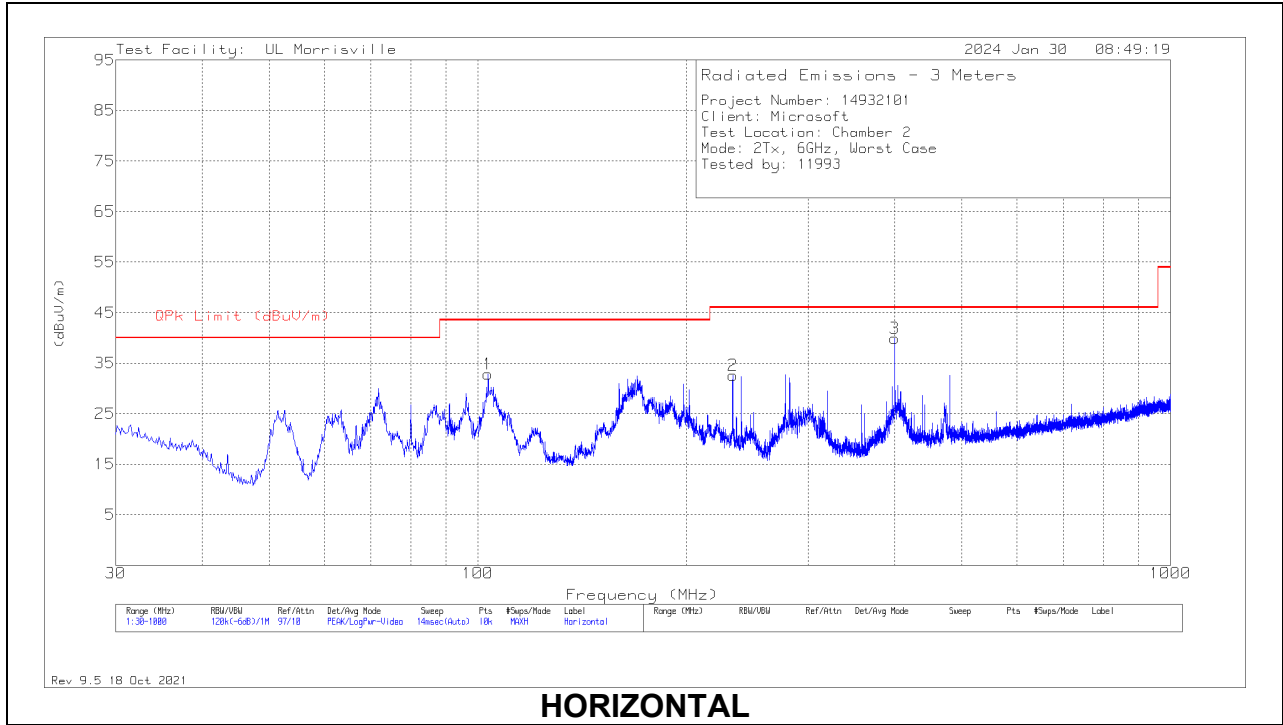

HORIZONTAL

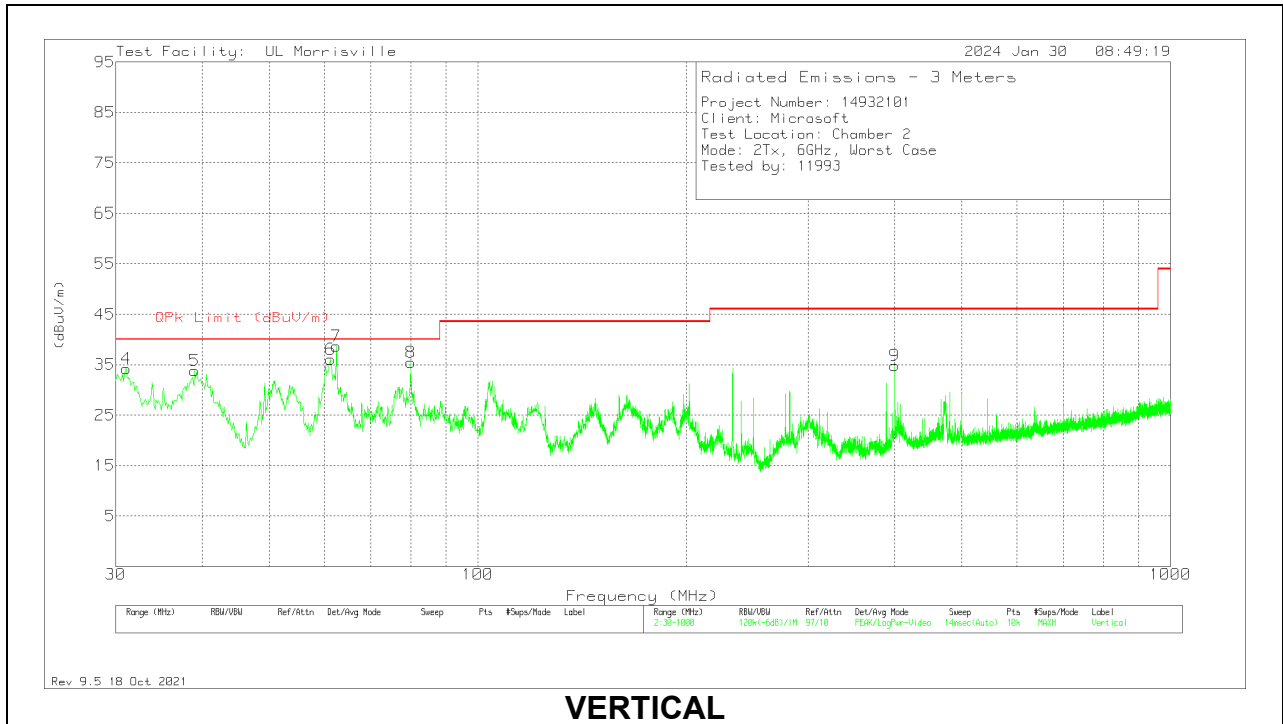


VERTICAL

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	85717 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	31.0123	36	Qp	25.9	-31.7	30.2	40	-9.8	294	106	V
5	39.021	44.82	Pk	20.5	-31.5	33.82	40	-6.18	0-360	101	V
6	61.378	44.99	Qp	13.8	-31	27.79	40	-12.21	43	106	V
7	62.4605	43.49	Qp	13.9	-31.3	26.09	40	-13.91	245	108	V
8	80.0322	50.6	Qp	13.5	-31.1	33	40	-7	217	108	V
1	103.429	46.68	Pk	17	-30.9	32.78	43.52	-10.74	0-360	299	H
2	233.312	45.55	Pk	16.9	-29.9	32.55	46.02	-13.47	0-360	101	H
3	400.055	47.46	Pk	21.4	-29	39.86	46.02	-6.16	0-360	101	H
9	400.055	42.46	Pk	21.4	-29	34.86	46.02	-11.16	0-360	101	V


Pk - Peak detector

Qp - Quasi-Peak detector

11.4. WORST CASE 18-26.5 GHZ

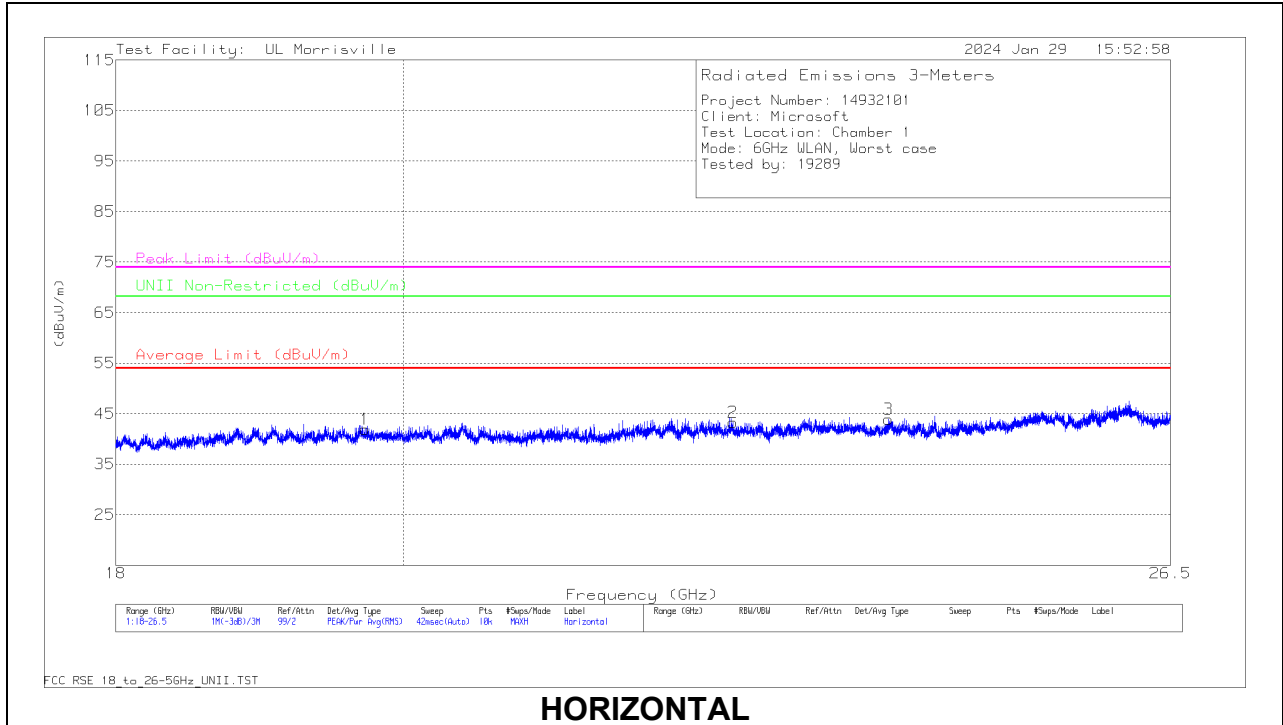

HORIZONTAL


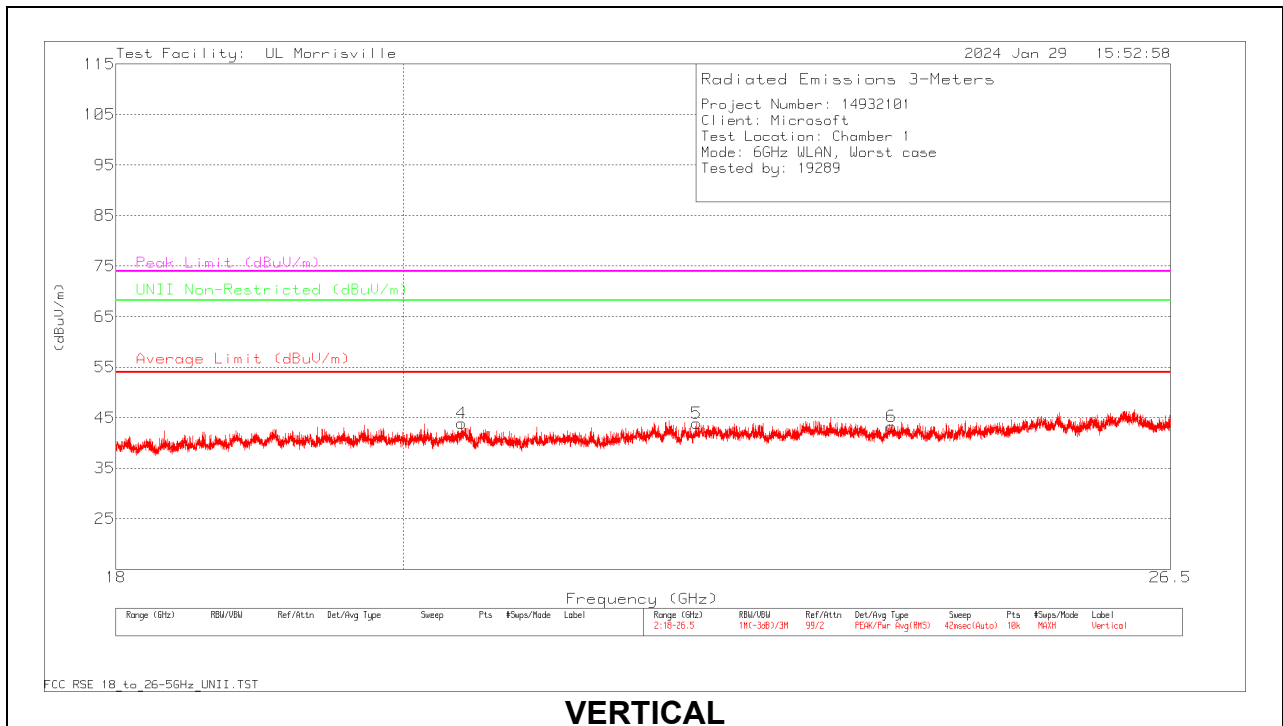


VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204704 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 19.72193	46.67	Pk	33.2	-38	41.87	54	-12.13	74	-32.13	-	-	0-360	199	H
2	*** 22.56999	46.71	Pk	34.3	-37.7	43.31	54	-10.69	74	-30.69	-	-	0-360	249	H
3	*** 23.89586	46.67	Pk	34.4	-37.2	43.87	54	-10.13	74	-30.13	-	-	0-360	249	H
4	*** 20.43331	47.96	Pk	33.6	-37.7	43.86	54	-10.14	74	-30.14	-	-	0-360	250	V
5	*** 22.27337	47.55	Pk	34.2	-37.9	43.85	54	-10.15	74	-30.15	-	-	0-360	200	V
6	*** 23.92136	45.87	Pk	34.4	-37	43.27	54	-10.73	74	-30.73	-	-	0-360	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

11.5. WORST CASE 26.5-40 GHZ

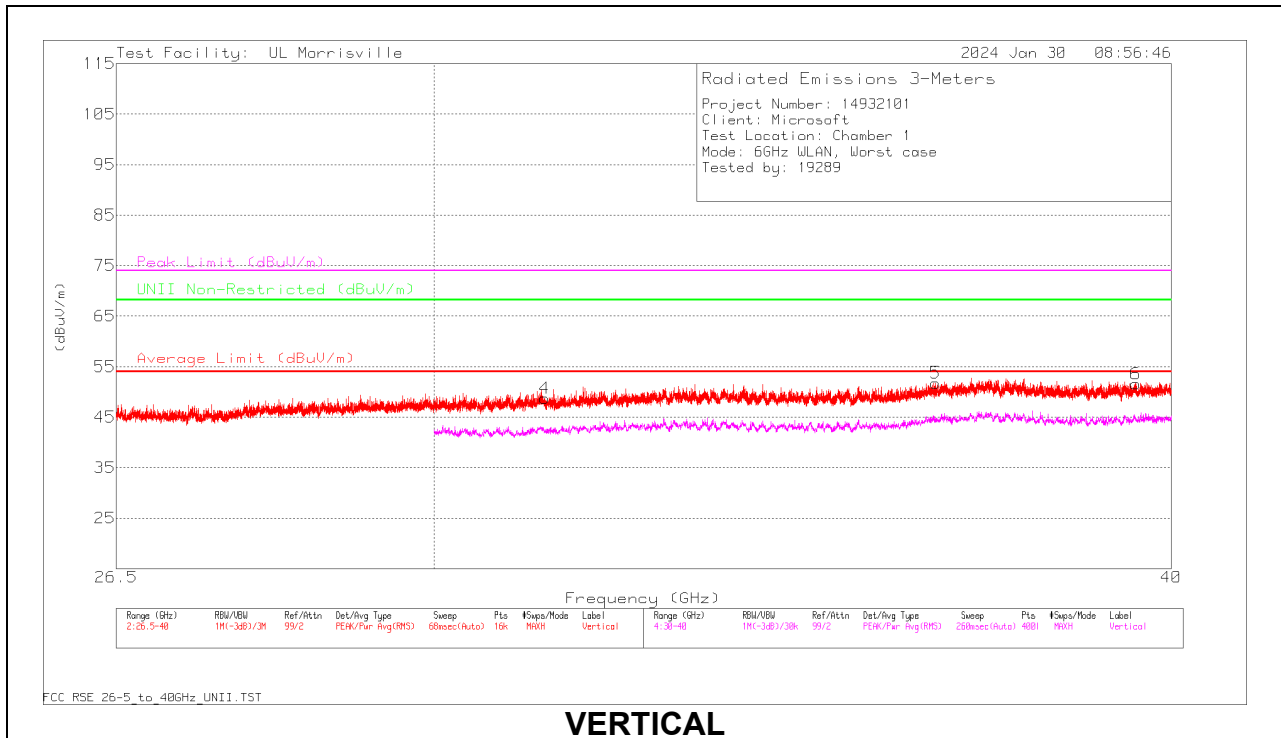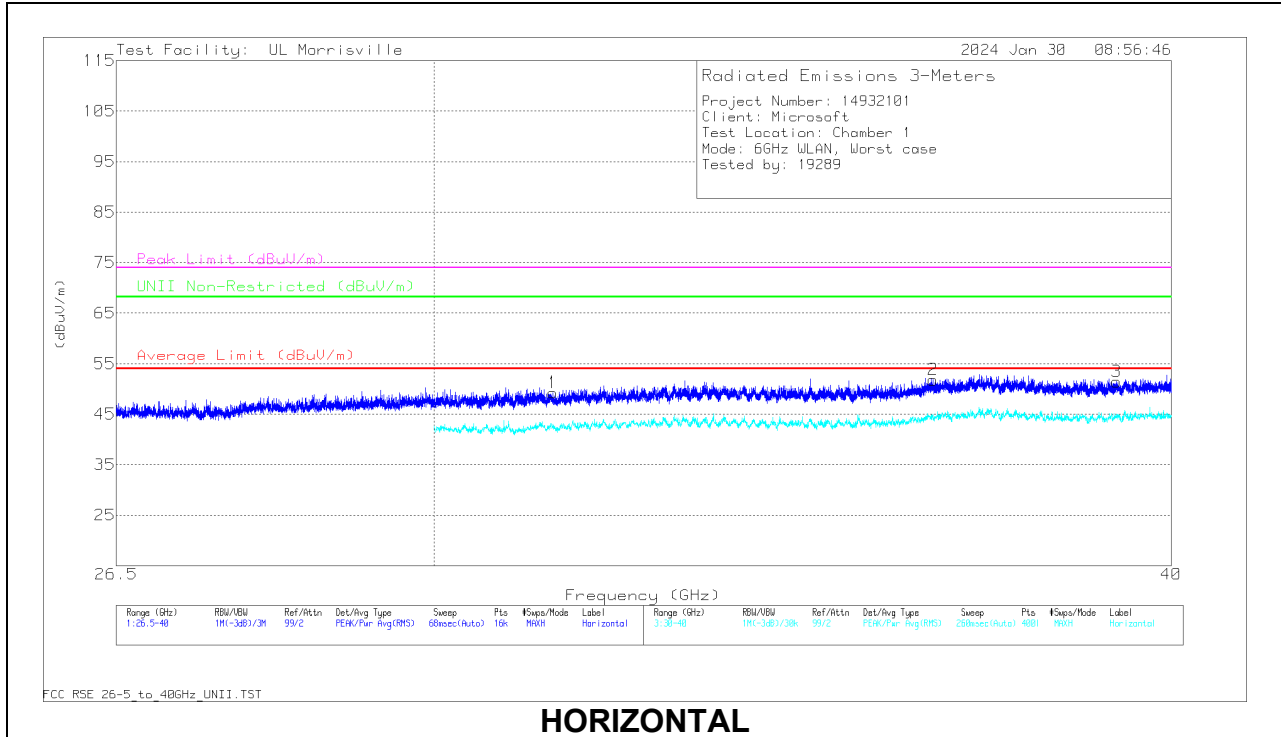

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204705 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 31.42628	47.63	PK-U	36.8	-34.1	50.33	-	-	74	-23.67	-	-	134	384	H
	*** 31.42386	35.58	ADR	36.8	-34.1	38.28	54	-15.72	-	-	-	-	134	384	H
2	*** 36.4482	50.94	PK-U	37.9	-35.8	53.04	-	-	74	-20.96	-	-	326	302	H
	*** 36.44955	38.14	ADR	37.9	-35.8	40.24	54	-13.76	-	-	-	-	326	302	H
3	*** 39.15542	49.04	PK-U	38.5	-34.7	52.84	-	-	74	-21.16	-	-	165	314	H
	*** 39.15591	36.47	ADR	38.5	-34.7	40.27	54	-13.73	-	-	-	-	165	314	H
4	*** 31.32768	47.76	PK-U	36.9	-34.2	50.46	-	-	74	-23.54	-	-	360	153	V
	*** 31.32464	35.7	ADR	37	-34.1	38.6	54	-15.4	-	-	-	-	360	153	V
5	*** 36.48074	50.12	PK-U	37.9	-35.9	52.12	-	-	74	-21.88	-	-	74	315	V
	*** 36.4816	38.01	ADR	37.9	-35.9	40.01	54	-13.99	-	-	-	-	74	315	V
6	*** 39.44854	48.95	PK-U	38.5	-34.6	52.85	-	-	74	-21.15	-	-	123	281	V
	*** 39.44813	35.98	ADR	38.5	-34.5	39.98	54	-14.02	-	-	-	-	123	281	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 PK-U - Maximum Peak
 ADR - RMS average

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both lines.

RESULTS

12.1. AC POWER LINE NORM

LINE 1 RESULTS

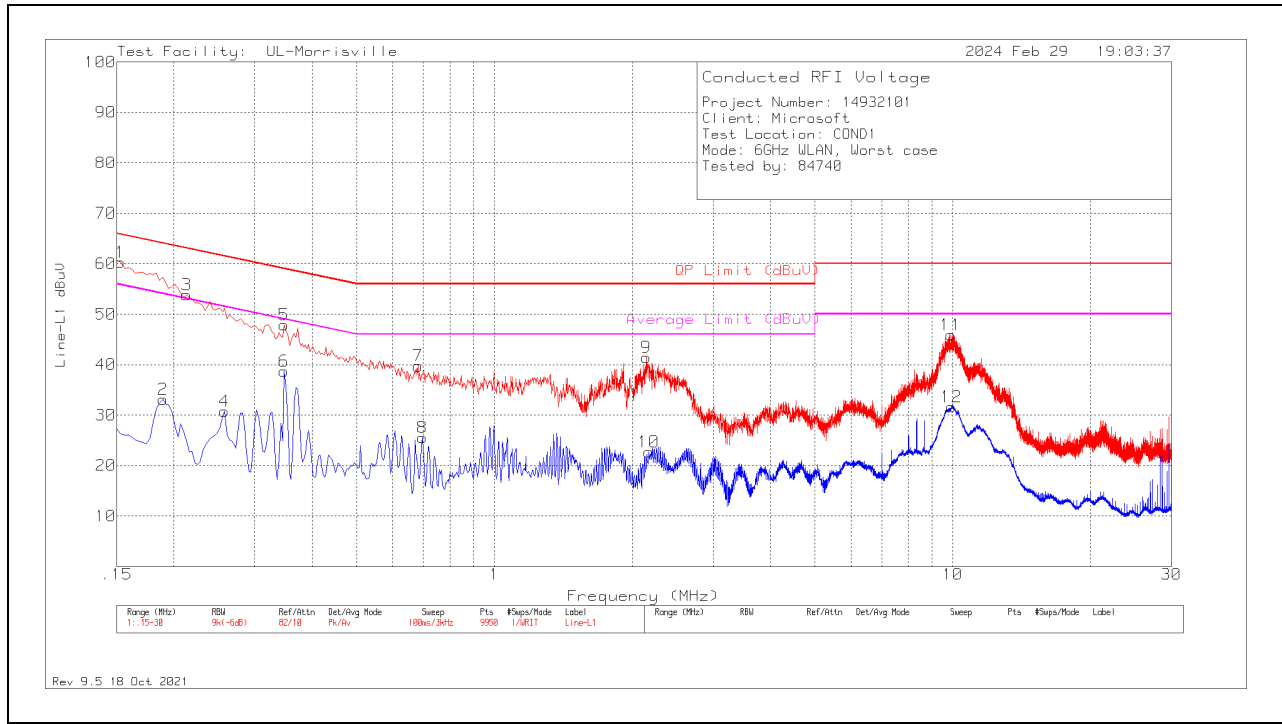


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.15101	42.47	Qp	.3	9.8	52.57	65.94	-13.37	-	-
2	.189	23.14	Av	.2	9.8	33.14	-	-	54.08	-20.94
3	.213	43.8	Pk	.2	9.8	53.8	63.09	-9.29	-	-
4	.258	20.76	Av	.2	9.8	30.76	-	-	51.5	-20.74
5	.348	37.98	Pk	.1	9.8	47.88	59.01	-11.13	-	-
6	.348	28.85	Av	.1	9.8	38.75	-	-	49.01	-10.26
7	.681	29.86	Pk	.1	9.8	39.76	56	-16.24	-	-
8	.696	15.66	Av	.1	9.8	25.56	-	-	46	-20.44
9	2.145	31.55	Pk	.1	9.8	41.45	56	-14.55	-	-
10	2.169	12.8	Av	.1	9.8	22.7	-	-	46	-23.3
11	9.897	35.79	Pk	.1	10	45.89	60	-14.11	-	-
12	9.933	21.49	Av	.1	10	31.59	-	-	50	-18.41

Pk - Peak detector
 Av - Average detection
 Qp - Quasi-Peak detector

LINE 2 RESULTS

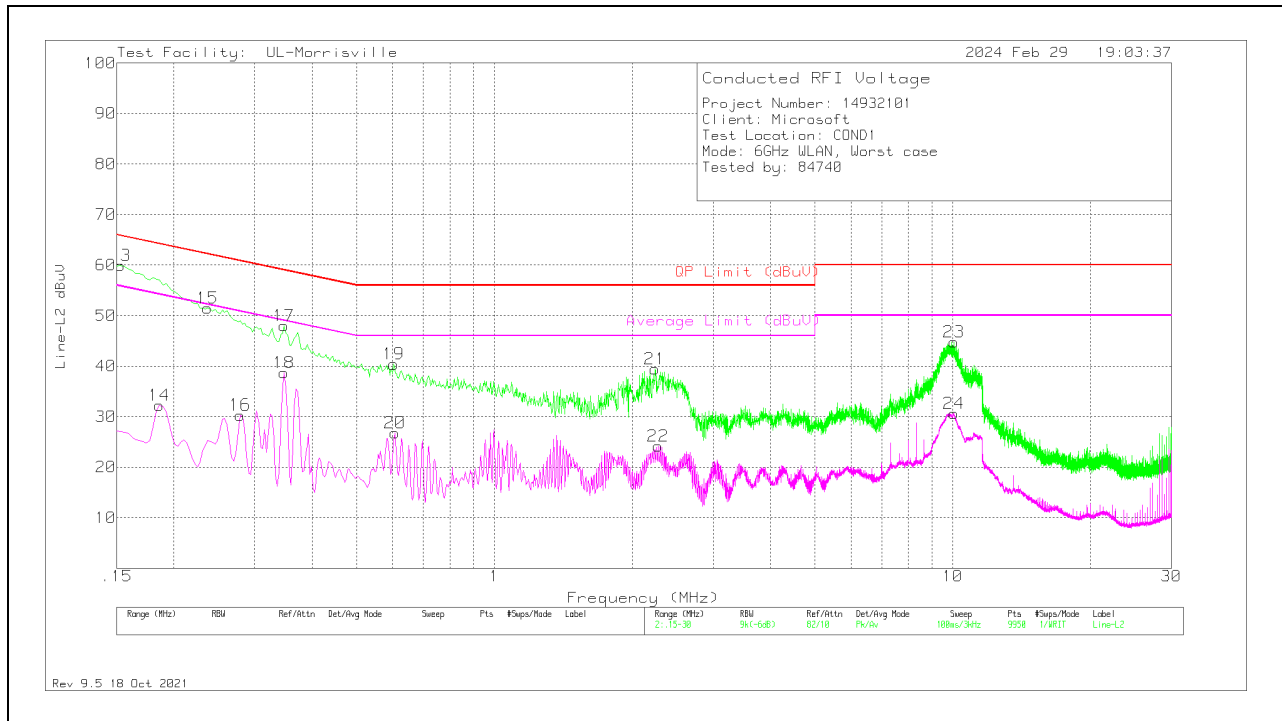

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.15038	42.06	Qp	.3	9.8	52.16	65.98	-13.82	-	-
14	.186	22.22	Av	.2	9.8	32.22	-	-	54.21	-21.99
15	.237	41.5	Pk	.2	9.8	51.5	62.2	-10.7	-	-
16	.279	20.32	Av	.2	9.8	30.32	-	-	50.85	-20.53
17	.348	38.11	Pk	.1	9.8	48.01	59.01	-11	-	-
18	.348	28.84	Av	.1	9.8	38.74	-	-	49.01	-10.27
19	.603	30.48	Pk	.1	9.8	40.38	56	-15.62	-	-
20	.606	16.92	Av	.1	9.8	26.82	-	-	46	-19.18
21	2.244	29.53	Pk	.1	9.8	39.43	56	-16.57	-	-
22	2.277	14.24	Av	.1	9.8	24.14	-	-	46	-21.86
23	10.05	34.64	Pk	.1	10	44.74	60	-15.26	-	-
24	10.056	20.48	Av	.1	10	30.58	-	-	50	-19.42

Pk - Peak detector
 Av - Average detection
 Qp - Quasi-Peak detector

13. SETUP PHOTOS

Please refer to R14932101-EP1a for setup photos

END OF TEST REPORT