



SAR EVALUATION REPORT

IEEE Std 1528-2013

For
Portable Computing Device with WLAN and Bluetooth

FCC ID: C3K2037
Model Name: 2037

Report Number: R14932101-S8
Issue Date: 4/23/2024

Prepared for
MICROSOFT CORP
1 MICROSOFT WAY
REDMOND, WA 98052-8300, U.S.

Prepared by
UL LLC
12 LABORATORY DR
RTP, NC 27709, U.S.A.
TEL: (919) 549-1400



Revision History

Rev.	Date	Revisions	Revised By
V1	3/7/2024	Initial Issue	--
V2	3/13/2024	Updated device description on title page. Updated DSS value in §1.	Lindsay Ryan
V3	3/18/2024	Updated §6.1 Device Dimensions row to refer to Appendix A and updated sample notes.	Lindsay Ryan
V4	3/27/2024	Updated tune-up for §9.3 to include both Standard Power and LPI for SAR back-off power state. Added APD tables to §10.2. Updated device pictures in Appendix A.	Lindsay Ryan
V5	4/16/2024	Updated exposure condition to standalone in §1 and throughout the report. Updated test position naming for clarity. Fixed typo in §6.2. Revised tune-up tables in §9 and added UNII-1 to §9.2 tune-ups. Updated §9.2 measured power and §10.2 SAR for UNII-2A Chain 0/1 and UNII-2C Chain 1. Corrected antenna naming in §9.3 and §12. Updated §11 test condition nomenclature to match rest of report. Clarified antenna naming convention in §12 table. Updated Software Version in §6.1. Updated Appendix A with standalone exposure condition. Added 6CD to equipment class and updated the 6CD highest value for standalone and simultaneous transmission.	Lindsay Ryan
V6	4/17/2024	Fixed broken table of contents reference. Updated RF exposure condition naming convention in §10.1-10.3.	Lindsay Ryan
V7	4/23/2024	Added UNII-3 802.11a measurements used for TAS to §10.2. Updated §8 and Appendix B and C to reflect the added measurements for TAS.	Lindsay Ryan

Table of Contents

1. Attestation of Test Results 5

2. Test Specification, Methods and Procedures..... 6

3. Facilities and Accreditation..... 7

4. SAR Measurement System & Test Equipment 8

 4.1. SAR Measurement System..... 8

 4.2. SAR Scan Procedures..... 9

 4.3. Test Equipment..... 11

5. Measurement Uncertainty..... 12

6. Device Under Test (DUT) Information 13

 6.1. DUT Description 13

 6.2. Wireless Technologies..... 14

7. RF Exposure Conditions (Test Configurations) 15

 7.1. Required Test Configurations 15

8. Dielectric Property Measurements & System Check 16

 8.1. Dielectric Property Measurements 16

 8.2. System Check..... 18

9. Conducted Output Power Measurements..... 20

 9.1. Wi-Fi 2.4GHz (DTS Band)..... 20

 9.2. Wi-Fi 5GHz (U-NII Bands)..... 23

 9.3. Wi-Fi 6GHz (U-NII 5-8 Bands) 30

 9.4. Bluetooth 36

10. Measured and Reported (Scaled) SAR Results..... 38

 10.1. Wi-Fi (DTS Band)..... 39

 10.2. Wi-Fi (U-NII Band)..... 40

 10.3. Bluetooth..... 42

11. SAR Measurement Variability..... 43

12. Simultaneous Transmission Conditions 44

 12.1. Simultaneous Transmission SAR 45

 12.2. Sum of the SAR for WLAN 2.4GHz, 5GHz, and 6GHz and Bluetooth WLAN Simultaneous Power 46



 12.3. SAR to Peak Location Separation Ratio (SPLSR) 47

Appendixes 52

 Appendix A: SAR Setup Photos 52

<i>Appendix B: SAR System Check Plots</i>	52
<i>Appendix C: SAR Highest Test Plots</i>	52
<i>Appendix D: SAR Tissue Ingredients</i>	52
<i>Appendix E: SAR Probe Certificates</i>	52
<i>Appendix F: SAR Dipole Certificates</i>	52

1. Attestation of Test Results

Applicant Name	MICROSOFT CORP			
FCC ID	C3K2037			
Model Name	2037			
Applicable Standards	Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average (1g of tissue)			
General population / Uncontrolled exposure	1.6			
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	DTS	NII	6CD	DSS
Standalone*	0.579	1.156	0.449	1.069
Simultaneous TX	1.565	1.565	1.477	1.489
Date Tested	12/11/2023 to 4/17/2024			
Test Results	Pass			
<p>*Note: The standalone RF exposure condition testing was performed at a separation distance of 0 mm.</p> <p>UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. Government.</p>				
Approved & Released By:		Prepared By:		
				
Richard Jankovics Staff Engineer UL LLC		Lindsay Ryan Engineer UL LLC		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE Std 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 616217 D04 SAR for laptop and tablets v01r02
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02

In addition to the above, the following information was used:

- [TCB Workshop](#) October 2015; RF Exposure Procedures (KDB 941225 D05A)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- [TCB Workshop](#) May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- [TCB Workshop](#) April 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))
- [TCB Workshop](#) April 2019; RF Exposure Procedures (802.11ax SAR Testing)
- [TCB workshop](#) October 2020; 5G and RF Exposure Procedures (U-NII 6-7 GHz SAR Testing)
- [TCB Workshop](#) April 2022; RF Exposure Procedures (Sum-Peak Location Separation Ratio)

3. Facilities and Accreditation

UL LLC is accredited by A2LA, cert. # 0751.06 for all testing performed within the scope of this report. Testing was performed at the locations noted below.

The test sites and measurement facilities used to collect data are located at 2800 Perimeter Park Dr, Morrisville, NC, USA.


- SAR Lab 1A
- SAR Lab 2A
- SAR Lab 2B

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

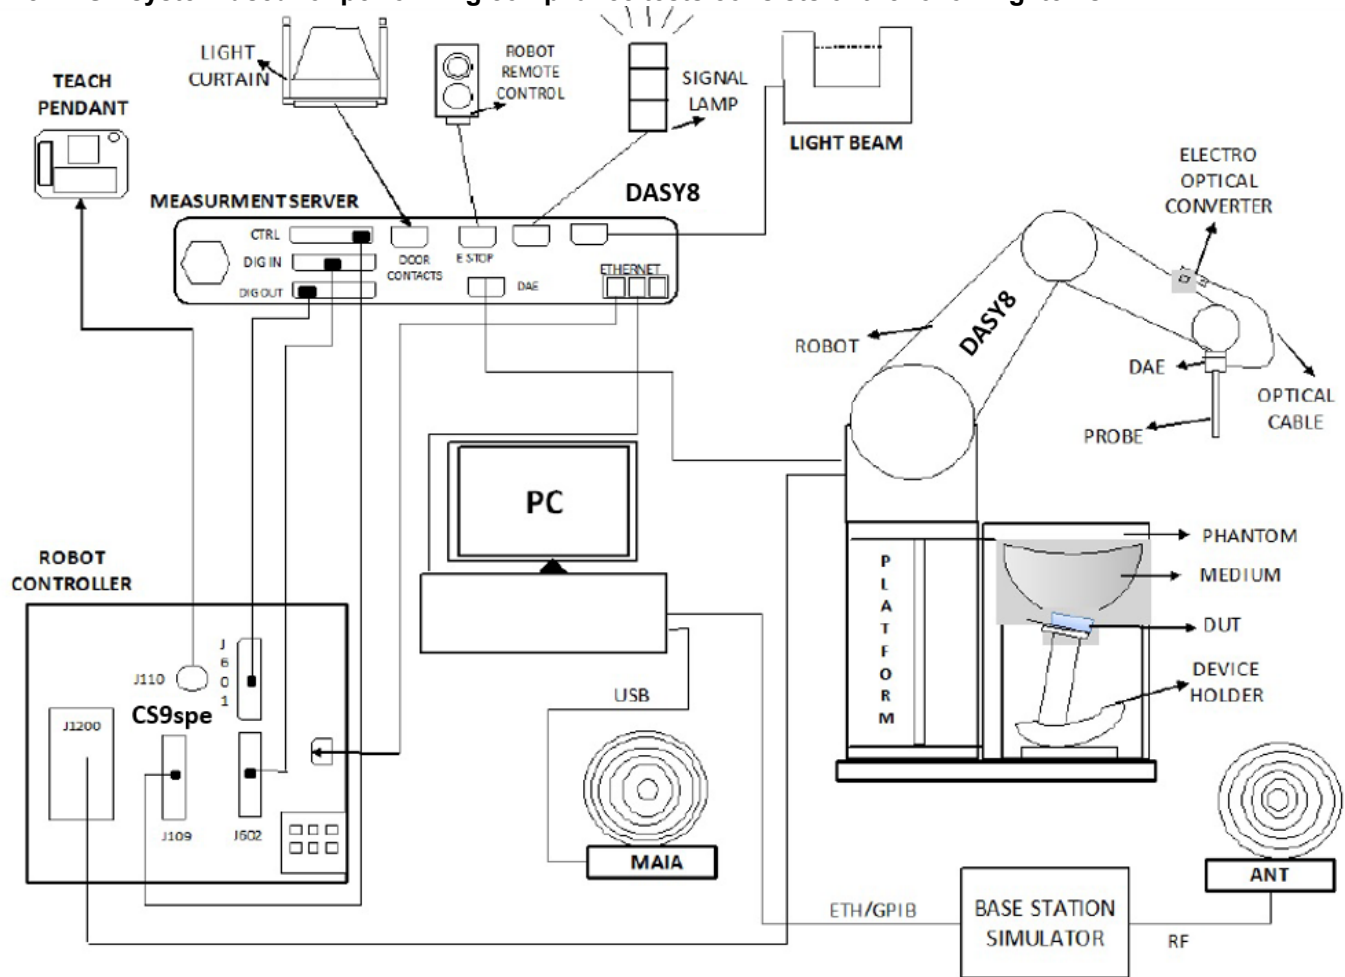

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY8¹ software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

¹ DASY8 software used: DASY16.2.4.2524 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
Network Analyzer	Keysight	E5063A	MY54100681	8/4/2023	8/4/2024
Dielectric Probe	SPEAG	DAKS-3.5	1051	10/25/2023	10/25/2024
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 DA	10/25/2023	10/25/2024
Thermometer	Fisher Scientific	15-078-181	1817705017	3/29/2024	3/30/2025

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
Signal Generator	Keysight	N5181A	MY50140788	8/3/2023	8/3/2024
RF Power Meter	Keysight	N1912A	MY55136012	8/4/2023	8/4/2024
RF Power Sensor ¹	Keysight	N1921A	MY55090023	4/3/2023	4/3/2024
RF Power Sensor	Keysight	N1921A	MY55090030	6/26/2023	6/26/2024
Amplifier	Mini-Circuits	ZVA-183WA-S+	S C484802241	N/A	N/A
Directional Coupler	Mini-Circuits	ZUDC10-183+	2214	NA	NA
Dual Directional Coupler	Werlatone	C5100-10	92249	N/A	N/A
DC Power Supply	Miteq	PS 15V1	1990186	N/A	N/A
RF Power Source	Speag	PowerSource1	4278	6/13/2023	6/13/2024

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
E-Field Probe	SPEAG	EX3DV4	7709	11/30/2023	11/30/2024
E-Field Probe ¹	SPEAG	EX3DV4	7710	2/3/2023	2/3/2024
E-Field Probe ¹	SPEAG	EX3DV4	7711	3/29/2023	3/29/2024
E-Field Probe ²	SPEAG	EX3DV4	7711	3/15/2024	3/15/2025
Data Acquisition Electronics	SPEAG	DAE4	1714	11/22/2023	11/22/2024
Data Acquisition Electronics ¹	SPEAG	DAE4	1715	1/31/2023	1/31/2024
Data Acquisition Electronics ¹	SPEAG	DAE4	1716	3/16/2023	3/16/2024
Data Acquisition Electronics ²	SPEAG	DAE4	1716	3/13/2024	3/13/2025
System Validation Dipole	SPEAG	D2450V2	963	10/20/2023	10/20/2024
System Validation Dipole	SPEAG	D5GHzV2	1213	10/17/2023	10/17/2024
System Validation Dipole	SPEAG	D6.5GHzV2	1068	11/16/2023	11/16/2024
Environmental Indicator ¹	Control Company	06-662-4	200037610	2/24/2022	2/24/2024
Environmental Indicator ²	Fisher Scientific	Traceable	240072452	1/24/2024	1/24/2026

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
RF Power Meter	Keysight	N1911a	MY55116001	7/31/2023	7/31/2024
RF Power Meter	Keysight	N1911a	MY55116002	8/2/2023	8/2/2024
RF Power Meter	Keysight	N1912a	MY55136012	8/2/2023	8/2/2024
RF Power Sensor	Keysight	N1921a	MY55120011	7/31/2023	7/31/2024
RF Power Sensor	Keysight	N1921a	MY55090025	8/21/2023	8/21/2024
RF Power Sensor	Keysight	N1921a	MY55090030	6/30/2023	6/30/2024
RF Power Sensor ¹	Keysight	N1921a	MY55090047	2/2/2023	2/2/2024
RF Power Sensor ¹	Keysight	N1921a	MY55090023	4/3/2023	4/3/2024
RF Power Sensor	Keysight	E9323A	MY55110008	8/21/2023	8/21/2024
RF Power Sensor	Boonton Electronics	RTP5008	11835	8/1/2023	8/1/2024

Notes:

- Equipment not used for calibrated measurements past calibration due date.
- Equipment note used for calibrated measurements prior to the calibration.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Refer to Appendix A for device dimensions and description.							
Battery Options	The rechargeable battery is not user accessible.							
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)							
Test sample information	<table border="1"> <thead> <tr> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>0F3B36H23383HJ</td> <td>2.4GHz/6GHz/BT Conducted/Radiated</td> </tr> <tr> <td>0F3B37723383HJ</td> <td>5GHz/BT Conducted/Radiated</td> </tr> </tbody> </table>	S/N	Notes	0F3B36H23383HJ	2.4GHz/6GHz/BT Conducted/Radiated	0F3B37723383HJ	5GHz/BT Conducted/Radiated	
S/N	Notes							
0F3B36H23383HJ	2.4GHz/6GHz/BT Conducted/Radiated							
0F3B37723383HJ	5GHz/BT Conducted/Radiated							
Hardware Version	EV3							
Software Version	1.0.3808.9500							

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11n (HT40) 802.11ax (HE20) 802.11ax (HE40) 802.11be (EHT20) 802.11be (EHT40)	97.9% (802.11b) ¹
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT80) 802.11ac (VHT160) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160) 802.11be (EHT20) 802.11be (EHT40) 802.11be (EHT80) 802.11be (EHT160)	95.1% (802.11ac 160MHz BW) ¹ 99.1% (802.11a) ¹ 97.6% (802.11ac 80MHz BW) ¹ 99.1% (802.11ac 40MHz BW) ¹
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
	Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
	6GHz	802.11a 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160) 802.11be (EHT20) 802.11be (EHT40) 802.11be (EHT80) 802.11be (EHT160) 802.11be (EHT320)	99.6% (802.11be 320MHz BW) ¹
Bluetooth	2.4 GHz	BR, EDR, and LE	N/A

Notes:

3. Duty cycle for Wi-Fi is referenced from §9
4. As declared by manufacturer, Fast Connect TAS has the ability to declare different antenna groups, in which the algorithm will ensure that any Wi-Fi Simultaneous scenarios occurring in a given antenna group will stay under the Plimit. Therefore, any simultaneous case that consists of (2.4GHz + 5GHz) or (2.4GHz + 6GHz) on the same antenna group, then TAS will handle such a situation. Therefore, these simultaneous cases are not considered in §12.1.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Rear of Display	Edge Top ²	Edge Right ²	Bottom	Edge Left ²	Front
Wi-Fi 2.4 GHz SISO Chain 0	Yes	No	No	Yes	No	No
Wi-Fi 2.4 GHz SISO Chain 1	Yes	No	No	Yes	No	No
Wi-Fi 5 GHz SISO Chain 0	Yes	No	No	Yes	No	No
Wi-Fi 5 GHz SISO Chain 1	Yes	No	No	Yes	No	No
Wi-Fi 6 GHz SISO Chain 0	Yes	No	No	Yes	No	No
Wi-Fi 6 GHz SISO Chain 1	Yes	No	No	Yes	No	No
Bluetooth	Yes	No	No	Yes	No	No

Note(s):

1. Yes = Testing is required.
No = Testing is not required.
2. Per KDB 616217 D04 SAR for laptop and tablets v01r02, given that tablet use conditions are not supported, SAR exposure testing is not required for the edges of the keyboard and display of the device.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within ± 5% of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to ± 10%. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5100	36.1	4.55
5200	36.0	4.66
5300	35.9	4.76
5400	35.8	4.86
5500	35.6	4.96
5600	35.5	5.07
5700	35.4	5.17
5800	35.3	5.27
6000	35.1	5.48
6500	34.5	6.07
7000	33.9	6.65

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
1A	12/26/2023	5250	Head	5250	36.0	35.9	0.07	4.82	4.70	2.46
				5150	36.2	36.0	0.37	4.70	4.60	2.18
				5350	35.7	35.8	-0.28	4.93	4.80	2.68
1A	1/23/2024	6500	Head	6500	33.7	34.5	-2.46	6.11	6.07	0.59
				5925	34.6	35.2	-1.59	5.39	5.40	-0.19
				7125	32.6	33.8	-3.61	6.83	6.80	0.50
1A	2/15/2024	6500	Head	6500	34.0	34.5	-1.48	6.29	6.07	3.66
				5925	35.0	35.2	-0.57	5.59	5.40	3.56
				7125	32.7	33.8	-3.31	7.06	6.80	3.79
2A	12/11/2023	2450	Head	2450	38.2	39.2	-2.55	1.74	1.80	-3.17
				2400	38.3	39.3	-2.59	1.71	1.75	-2.49
				2480	38.2	39.2	-2.56	1.77	1.83	-3.57
2A	1/2/2024	2450	Head	2450	40.4	39.2	3.09	1.80	1.80	-0.06
				2400	40.5	39.3	3.04	1.76	1.75	0.65
				2480	40.4	39.2	3.08	1.82	1.83	-0.51
2A	1/8/2024	2450	Head	2450	39.5	39.2	0.71	1.77	1.80	-1.89
				2400	39.6	39.3	0.64	1.73	1.75	-1.12
				2480	39.5	39.2	0.73	1.79	1.83	-2.26
2A	1/8/2024	5600	Head	5600	34.2	35.5	-3.78	4.86	5.06	-4.06
				5500	34.4	35.7	-3.58	4.74	4.96	-4.36
				5725	33.9	35.4	-4.10	5.00	5.19	-3.57
2A	4/9/2024	2450	Head	2450	41.0	39.2	4.59	1.85	1.8	2.78
				2400	39.8	39.3	1.28	1.79	1.75	2.19
				2480	39.8	39.2	1.63	1.86	1.83	1.5
2A	4/12/2024	5250	Head	5250	36.8	35.9	2.30	4.73	4.70	0.59
				5150	37.0	36.1	2.56	4.61	4.60	0.24
				5350	36.6	35.8	2.12	4.85	4.80	0.86
2A	4/12/2024	5600	Head	5600	36.1	35.5	1.71	5.12	5.06	1.26
				5500	36.3	35.7	1.91	5.01	4.96	1.01
				5725	35.9	35.4	1.38	5.28	5.19	1.79
2B	12/27/2023	5250	Head	5250	35.3	35.9	-1.82	4.61	4.70	-2.02
				5150	35.5	36.0	-1.63	4.49	4.60	-2.37
				5350	35.1	35.8	-2.04	4.71	4.80	-1.88
2B	12/27/2023	5850	Head	5850	34.2	35.3	-3.12	5.29	5.32	-0.62
				5900	34.1	35.2	-3.13	5.35	5.38	-0.56
				5925	34.1	35.2	-3.21	5.39	5.40	-0.28
2B	4/16/2024	5750	Head	5750	35.0	35.4	-0.91	5.15	5.21	-1.24
				5700	35.1	35.4	-0.79	5.08	5.16	-1.52
				5850	34.9	35.3	-1.22	5.26	5.32	-1.09

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 5 mm (above 6 GHz), 10 mm (1-6 GHz), and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was recorded and the results were normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type_Serial #	Dipole Cal. Due Data	Dipole Power (dBm)	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
						Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
1A	12/26/2023	Head	D5GHzV2 SN: 1213 (5.25 GHz)	10/17/2024	17.00	4.030	80.41	80.10	0.39	1.150	22.95	23.10	-0.67	1
1A	1/24/2024	Head	D6.5GHzV2 SN: 1068	11/16/2024	17.00	15.300	305.28	297.00	2.79	2.810	56.07	54.80	2.31	
1A	2/16/2024	Head	D6.5GHzV2 SN: 1068	11/16/2024	17.00	16.200	323.23	297.00	8.83	2.980	59.46	54.80	8.50	2
2A	12/11/2023	Head	D2450V2 SN: 963	10/20/2024	17.00	2.480	49.48	53.30	-7.16	1.160	23.15	25.10	-7.79	
2A	1/2/2024	Head	D2450V2 SN: 963	10/20/2024	17.00	2.550	50.88	53.30	-4.54	1.200	23.94	25.10	-4.61	
2A	1/8/2024	Head	D2450V2 SN: 963	10/20/2024	17.00	2.480	49.48	53.30	-7.16	1.170	23.34	25.10	-6.99	
2A	1/8/2024	Head	D5GHzV2 SN: 1213 (5.60 GHz)	10/17/2024	17.00	4.020	80.21	83.80	-4.28	1.140	22.75	23.90	-4.83	
2A	4/9/2024	Head	D2450V2 SN: 963	10/20/2024	17.00	2.460	49.08	53.30	-7.91	1.150	22.95	25.10	-8.58	3
2A	4/12/2024	Head	D5GHzV2 SN: 1213 (5.25 GHz)	10/17/2024	17.00	3.680	73.43	80.10	-8.33	1.050	20.95	23.10	-9.31	4
2A	4/12/2024	Head	D5GHzV2 SN: 1213 (5.60 GHz)	10/17/2024	17.00	3.980	79.41	83.80	-5.24	1.120	22.35	23.90	-6.5	5
2B	12/27/2023	Head	D5GHzV2 SN: 1213 (5.25 GHz)	10/17/2024	17.00	3.800	75.82	80.10	-5.34	1.090	21.75	23.10	-5.85	6
2B	12/27/2023	Head	D5GHzV2 SN: 1213 (5.85 GHz)	10/17/2024	17.00	3.910	78.01	81.40	-4.16	1.110	22.15	23.10	-4.12	7
2B	4/16/2024	Head	D5GHzV2 SN: 1213 (5.75 GHz)	10/17/2024	17.00	3.720	74.22	80.30	-7.57	1.060	21.15	23.00	-8.04	8

9. Conducted Output Power Measurements

Tune-Up Power Limits provided by the manufacturer are used to scale measured SAR values.

9.1. Wi-Fi 2.4GHz (DTS Band)

Maximum Output Power (Tune-up Limit) for Wi-Fi 2.4 GHz

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11b/g/n mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Frequency Band	2GHz Channel Groups	FCC SAR		
		mode: 11b/g/n/ax/be		
		BW: 20/40/ all ax partial BWs		
		Channels	Chain 0 (Left)	Chain 1 (Right)
2.4 GHz	0	1 to 11	19.25	19.25
	1	12	19.25	19.25
	2	13	19.25	19.25

SAR back-off power levels are to be used in that state unless Max power state is lower.

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up	Chain 1 Tune-Up
DSSS 2.4 GHz	802.11b	1	2412	18.00	18.00
		2	2417	20.00	20.00
		3	2422	20.25	20.25
		4	2427	20.25	20.25
		5	2432	20.25	20.25
		6	2437	20.25	20.25
		7	2442	20.25	20.25
		8	2447	20.25	20.25
		9	2452	20.25	20.25
		10	2457	20.00	20.00
		11	2462	20.00	20.00
		12	2467	12.00	12.00
		13	2472	9.50	9.50
OFDM 2.4 GHz	802.11g	1	2412	17.75	17.75
		6	2437	20.25	20.25
		11	2462	15.00	15.00
		12	2467	14.00	14.00
	13	2472	-5.00	-5.00	
	802.11n (HT20)	1	2412	16.00	16.00
		6	2437	19.50	19.50
		11	2462	13.00	13.00
		12	2467	12.50	12.50
	13	2472	-4.50	-4.50	
	802.11ac (VHT20)	1	2412	16.00	16.00
		6	2437	19.50	19.50
		11	2462	13.00	13.00
		12	2467	12.50	12.50
	13	2472	-4.50	-4.50	
	802.11n (HT40)	3	2422	14.50	14.50
		6	2437	15.50	15.50
		9	2452	12.50	12.50
		10	2457	11.00	11.00
	11	2462	-0.50	-0.50	
	802.11ac (VHT40)	3	2422	14.50	14.50
		6	2437	15.50	15.50
		9	2452	12.50	12.50
		10	2457	11.00	11.00
	11	2462	-0.50	-0.50	
	802.11ax (HE20)	1	2412	16.00	16.00
		6	2437	19.50	19.50
		11	2462	13.00	13.00
		12	2467	12.50	12.50
	13	2472	-4.50	-4.50	
	802.11be (EHT20)	1	2412	16.00	16.00
		6	2437	19.50	19.50
		11	2462	13.00	13.00
		12	2467	12.50	12.50
	13	2472	-4.50	-4.50	
	802.11ax (HE40)	3	2422	14.50	14.50
		6	2437	15.50	15.50
		9	2452	12.50	12.50
		10	2457	11.00	11.00
	11	2462	-0.50	-0.50	
	802.11be (EHT40)	3	2422	14.50	14.50
		6	2437	15.50	15.50
9		2452	12.50	12.50	
10		2457	11.00	11.00	
11	2462	-0.50	-0.50		

Wi-Fi 2.4GHz Measured Results

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
DSSS 2.4 GHz	802.11b	1	2412	17.24	18.50	Yes	17.36	18.50	Yes
		2	2417	17.36	18.50		17.33	18.50	
		3	2422	18.94	20.25		18.93	20.25	
		6	2437	19.16	20.25		18.81	20.25	
		9	2452	19.47	20.25		19.58	20.25	
		11	2462	18.86	20.00		18.99	20.00	

Note(s):

SAR is not required for channel 12 and 13 because the tune-up limit and the measured output power for these two channels are not greater than those for the default test channels. Refer to KDB 248227 D01 section 3.1

Duty Factor Measured Results


Mode	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11b	0.6553	0.6691	97.9%	1.02

Note(s):

Duty Cycle = (T on / period) * 100%

Duty Cycle plots

802.11b

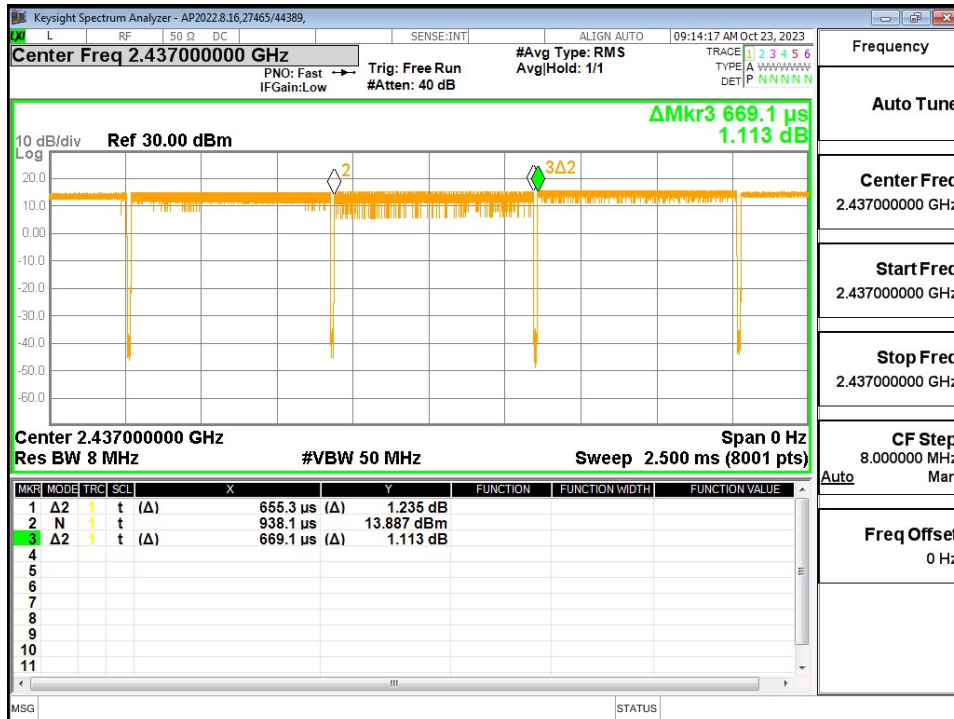

9.2. Wi-Fi 5GHz (U-NII Bands)

Maximum Output Power (Tune-up Limit) for Wi-Fi 5 GHz

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac/ax modes, the channel in the lower order/sequence 802.11 transmission mode is selected.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac/ax mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

	5GHz Channel Groups	mode: 11a/n/ax/be		
		BW: 20/40/80/160/ all partial and M-RU BWs		
		Channels	Chain 0 (Left)	Chain 1 (Right)
5.15 to 5.25 GHz	0	36 to 48	13.25	15.5
5.25 to 5.35 GHz	1	52 to 64	13.25	15.5
5.47 to 5.725 GHz	2	100 to 144	13.75	13.25
5.725 to 5.85 GHz	3	149 to 165	12	13.25
5.85 to 5.925 GHz	4	169 to 181	12	13.25

SAR back-off power levels are to be used in that state unless Max power state is lower.

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up	Chain 1 Tune-Up
UNII-1 5.2 GHz	802.11a	36	5180	14.25	16.50
		40	5200	14.25	16.50
		44	5220	14.25	16.50
		48	5240	14.25	16.50
	802.11n (HT20)	36	5180	14.25	16.50
		40	5200	14.25	16.50
		44	5220	14.25	16.50
		48	5240	14.25	16.50
	802.11ac (VHT20)	36	5180	14.25	16.50
		40	5200	14.25	16.50
		44	5220	14.25	16.50
		48	5240	14.25	16.50
	802.11ax (HE20)	36	5180	14.25	16.50
		40	5200	14.25	16.50
		44	5220	14.25	16.50
		48	5240	14.25	16.50
	802.11be (EHT20)	36	5180	14.25	16.50
		40	5200	14.25	16.50
		44	5220	14.25	16.50
		48	5240	14.25	16.50
	802.11n (HT40)	38	5190	14.25	16.00
		46	5230	14.25	16.00
	802.11ac (VHT40)	38	5190	14.25	16.00
		46	5230	14.25	16.00
	802.11ax (HE40)	38	5190	14.25	16.00
		46	5230	14.25	16.00
	802.11be (EHT40)	38	5190	14.25	16.00
		46	5230	14.25	16.00
802.11ac (VHT80)	42	5210	14.00	14.00	
	42	5210	14.00	14.00	
802.11ax (HE80)	42	5210	14.00	14.00	
	42	5210	14.00	14.00	
802.11be (EHT80)	42	5210	14.00	14.00	
	42	5210	14.00	14.00	
Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up	Chain 1 Tune-Up
UNII-2A 5.3 GHz	802.11a	52	5260	14.25	16.50
		56	5280	14.25	16.50
		60	5300	14.25	16.50
		64	5320	14.25	16.50
	802.11n (HT20)	52	5260	14.25	16.50
		56	5280	14.25	16.50
		60	5300	14.25	16.50
		64	5320	14.25	16.00
	802.11ac (VHT20)	52	5260	14.25	16.50
		56	5280	14.25	16.50
		60	5300	14.25	16.50
		64	5320	14.25	16.00
	802.11ax (HE20)	52	5260	14.25	16.50
		56	5280	14.25	16.50
		60	5300	14.25	16.50
		64	5320	14.25	16.00
	802.11be (EHT20)	52	5260	14.25	16.50
		56	5280	14.25	16.50
		60	5300	14.25	16.50
		64	5320	14.25	16.00
	802.11n (HT40)	54	5270	14.25	16.00
		62	5310	14.25	16.00
	802.11ac (VHT40)	54	5270	14.25	16.00
		62	5310	14.25	16.00
	802.11ax (HE40)	54	5270	14.25	16.00
		62	5310	14.25	16.00
	802.11be (EHT40)	54	5270	14.25	16.00
		62	5310	14.25	16.00
	802.11ac (VHT80)	58	5290	14.00	14.00
		58	5290	14.00	14.00
	802.11ax (HE80)	58	5290	14.00	14.00
		58	5290	14.00	14.00
802.11be (EHT80)	58	5290	14.00	14.00	
	58	5290	14.00	14.00	

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up	Chain 1 Tune-Up
UNII-2C 5.5 GHz	802.11a	100	5500	14.75	14.25
		116	5580	14.75	14.25
		124	5620	14.75	14.25
		144	5720	14.75	14.25
		100	5500	14.75	14.25
	802.11n (HT20)	116	5580	14.75	14.25
		124	5620	14.75	14.25
		144	5720	14.75	14.25
		100	5500	14.75	14.25
	802.11ac (VHT20)	116	5580	14.75	14.25
		124	5620	14.75	14.25
		144	5720	14.75	14.25
		100	5500	14.75	14.25
	802.11ax (HE20)	116	5580	14.75	14.25
		124	5620	14.75	14.25
		144	5720	14.75	14.25
		100	5500	14.75	14.25
	802.11be (EHT20)	116	5580	14.75	14.25
		124	5620	14.75	14.25
		144	5720	14.75	14.25
		102	5510	14.75	14.25
	802.11n (HT40)	118	5590	14.75	14.25
		126	5630	14.75	14.25
		142	5710	14.75	14.25
		102	5510	14.75	14.25
	802.11ac (VHT40)	118	5590	14.75	14.25
		126	5630	14.75	14.25
		142	5710	14.75	14.25
		102	5510	14.75	14.25
	802.11ax (HE40)	118	5590	14.75	14.25
		126	5630	14.75	14.25
		142	5710	14.75	14.25
		102	5510	14.75	14.25
	802.11be (EHT40)	118	5590	14.75	14.25
		126	5630	14.75	14.25
		142	5710	14.75	14.25
		106	5530	14.75	14.25
	802.11ac (VHT80)	122	5610	14.75	14.25
		138	5690	14.75	14.25
		106	5530	14.75	14.25
		122	5610	14.75	14.25
	802.11ax (HE80)	138	5690	14.75	14.25
		106	5530	14.75	14.25
		122	5610	14.75	14.25
		138	5690	14.75	14.25
	802.11be (EHT80)	106	5530	14.75	14.25
		122	5610	14.75	14.25
		138	5690	14.75	14.25
114		5570	14.50	14.25	
UNII-2C 5.5 GHz	802.11ac (VHT160)	114	5570	14.50	14.25
	802.11ax (HE160)	114	5570	14.50	14.25
	802.11be (EHT160)	114	5570	14.50	14.25

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up	Chain 1 Tune-Up
UNII-3 5.8 GHz	802.11a	149	5745	13.00	14.25
		157	5785	13.00	14.25
		165	5825	13.00	14.25
	802.11n (HT20)	149	5745	13.00	14.25
		157	5785	13.00	14.25
		165	5825	13.00	14.25
	802.11ac (VHT20)	149	5745	13.00	14.25
		157	5785	13.00	14.25
		165	5825	13.00	14.25
	802.11ax (HE20)	149	5745	13.00	14.25
		157	5785	13.00	14.25
		165	5825	13.00	14.25
	802.11be (EHT20)	149	5745	13.00	14.25
		157	5785	13.00	14.25
		165	5825	13.00	14.25
	802.11n (HT40)	151	5755	13.00	14.25
		159	5795	13.00	14.25
		151	5755	13.00	14.25
	802.11ac (VHT40)	151	5755	13.00	14.25
		159	5795	13.00	14.25
		151	5755	13.00	14.25
	802.11ax (HE40)	151	5755	13.00	14.25
		159	5795	13.00	14.25
		151	5755	13.00	14.25
802.11be (EHT40)	151	5755	13.00	14.25	
	159	5795	13.00	14.25	
	155	5775	13.00	14.25	
802.11ac (VHT80)	155	5775	13.00	14.25	
	155	5775	13.00	14.25	
	155	5775	13.00	14.25	
UNII-3 & 4	802.11a	169	5845	13.00	14.25
	802.11n (HT20)	169	5845	13.00	14.25
	802.11ac (VHT20)	169	5845	13.00	14.25
	802.11ax (HE20)	169	5845	13.00	14.25
	802.11be (EHT20)	169	5845	13.00	14.25
	802.11n (HT40)	167	5835	13.00	14.25
	802.11ac (VHT40)	167	5835	13.00	14.25
	802.11ax (HE40)	167	5835	13.00	14.25
	802.11be (EHT40)	167	5835	13.00	14.25
	802.11ac (VHT80)	171	5855	13.00	14.25
	802.11ax (HE80)	171	5855	13.00	14.25
	802.11be (EHT80)	171	5855	13.00	14.25
	802.11ac (VHT160)	163	5815	13.00	14.25
	802.11ax (HE160)	163	5815	13.00	14.25
	802.11be (EHT160)	163	5815	13.00	14.25
	Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up
UNII-4 5.9 GHz	802.11a	173	5865	13.00	14.25
		177	5885	13.00	14.25
		181	5905	13.00	14.25
	802.11n (HT20)	173	5865	13.00	14.25
		177	5885	13.00	14.25
		181	5905	13.00	14.25
	802.11ac (VHT20)	173	5865	13.00	14.25
		177	5885	13.00	14.25
		181	5905	13.00	14.25
	802.11ax (HE20)	173	5865	13.00	14.25
		177	5885	13.00	14.25
		181	5905	13.00	14.25
	802.11be (EHT20)	173	5865	13.00	14.25
		177	5885	13.00	14.25
		181	5905	13.00	14.25
	802.11n (HT40)	175	5875	13.00	14.25
	802.11ac (VHT40)	175	5875	13.00	14.25
	802.11ax (HE40)	175	5875	13.00	14.25
	802.11be (EHT40)	175	5875	13.00	14.25

Wi-Fi 5 GHz Measured Results

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2A 5.3 GHz	802.11a	52	5260				16.30	16.50	Yes
		56	5280				16.33	16.50	
		60	5300				16.30	16.50	
		64	5320				16.22	16.50	
	802.11ac (VHT40)	54	5270	13.56	14.25	Yes			
		62	5310	13.82	14.25				
Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2C 5.5 GHz	802.11ac (VHT80)	106	5530	14.62	14.75	No			
		122	5610	14.65	14.75				
		138	5690	14.32	14.75				
UNII-2C 5.5 GHz	802.11ac (VHT160)	114	5570				13.96	14.25	Yes
Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-3 & 4	802.11ac (VHT160)	163	5815	12.52	13.00	Yes	13.62	14.25	Yes

Duty Factor Measured Results

Mode	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11ac (VHT160)	0.3633	0.3819	95.1%	1.05
Mode	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11a	2.096	2.115	99.1%	1.01
Mode	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11ac (VHT80)	0.7553	0.774	97.6%	1.02
Mode	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11ac (VHT40)	2.011	2.03	99.1%	1.01

Note(s):

Duty Cycle = (T on / period) * 100%


Duty Cycle plots

802.11ac (VHT160)




Duty Cycle plots

802.11a

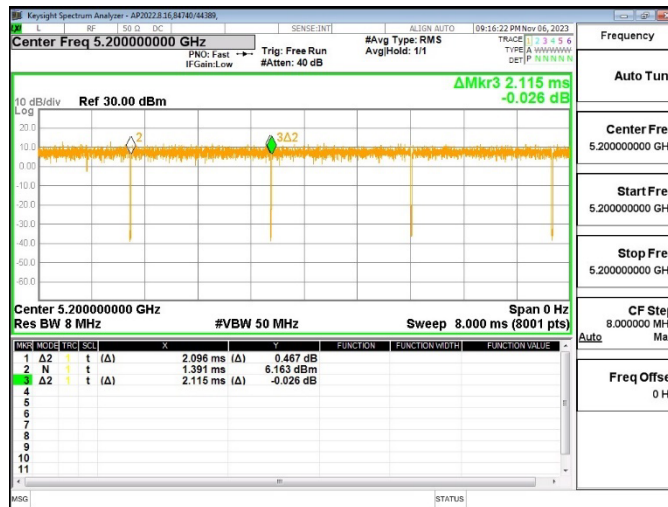


Duty Cycle plots

802.11ac (VHT80)

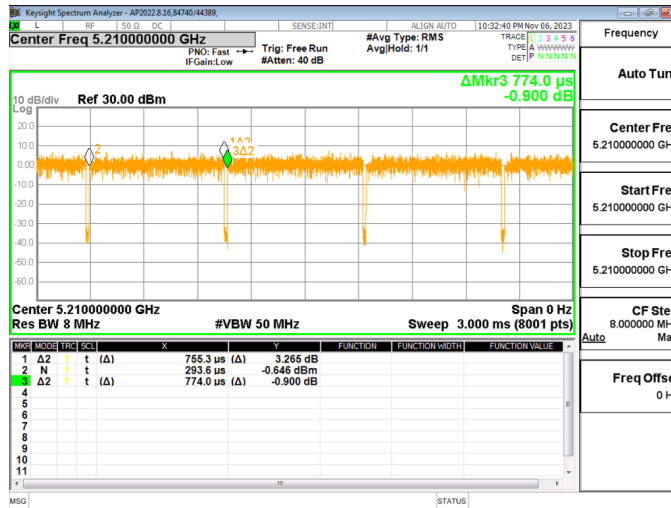

Duty Cycle plots

802.11ac (VHT40)

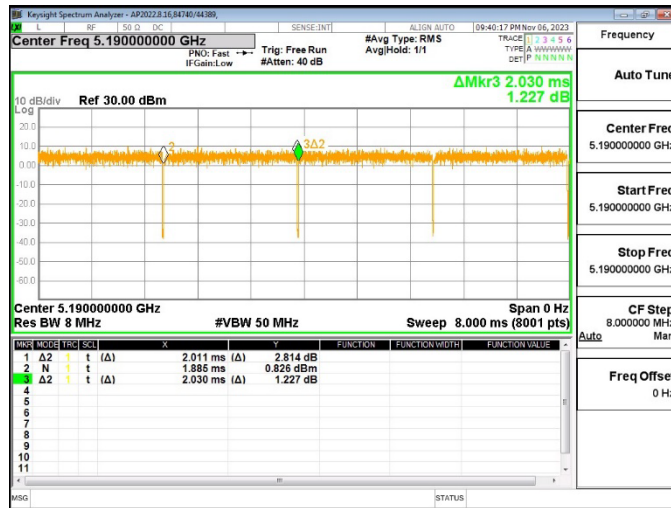

9.3. Wi-Fi 6GHz (U-NII 5-8 Bands)

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/ax/be modes, the channel in the lower order/sequence 802.11 transmission mode is selected.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

Wi-Fi 6GHz Test channels were determined in one of two ways:

- Wi-Fi 6GHz was Aggregated due to the same transmission mode being selected for SAR testing. 5 total test channels from across all U-NII 5/6/7/8 were selected.
- Wi-Fi 6GHz was Split due to different transmission modes being selected for SAR testing. A minimum of 3 test channels were selected for each individual U-NII Band.

Maximum Output Power for Wi-Fi - 6 GHz

The table below is the maximum output power for this device. SAR back-off is always triggered (static SAR), with Time-Averaged SAR enabled.

Max-power state – Standard Power (Indoor/Outdoor) – Chain 0/1

Freq. Band	20 MHz & Partial BWs								40 MHz				80 MHz			
	Ch #	Center Freq	Maximum Output Power (dBm) SISO/MIMO per Chain					HE20/ EHT20	Ch #	Center Freq	Maximum Output Power (dBm) SISO/MIMO per Chain		Ch #	Center Freq	Maximum Output Power (dBm) SISO/MIMO per Chain	
			11a	26T	52T, 52T+26T	106T, 106T+26T	242T				484T, 484T+242T	HE40/ EHT40			996T, 996T+484T	HE80/ EHT80
U-NII-5 (5.925 to 6.425 GHz)	1	5935	18.00	9.50	12.50	14.50	18.00	18.00	3	5965	19.00	19.00	7	5985	18.00	19.00
	5	5975	18.00	9.50	12.50	14.50	18.00	18.00	11	6005	19.00	19.00	19	6045	19.00	19.00
	9	5995	18.00	9.50	12.50	14.50	18.00	18.00	27	6085	19.00	19.00	23	6065	18.00	19.00
	13	6015	18.00	9.50	12.50	14.50	18.00	18.00	35	6125	19.00	19.00	39	6145	18.00	19.00
	17	6035	18.00	9.50	12.50	14.50	18.00	18.00	43	6165	19.00	19.00	51	6205	19.00	19.00
	21	6055	18.00	9.50	12.50	14.50	18.00	18.00	59	6245	19.00	19.00	67	6285	19.00	19.00
	25	6075	18.00	9.50	12.50	14.50	18.00	18.00	75	6325	19.00	19.00	71	6305	18.00	19.00
	29	6095	18.00	9.50	12.50	14.50	18.00	18.00	83	6365	19.00	19.00	87	6385	17.00	19.00
	33	6115	18.00	9.50	12.50	14.50	18.00	18.00	91	6405	18.50	18.50				
	37	6135	18.00	9.50	12.50	14.50	18.00	18.00								
	41	6155	18.00	9.50	12.50	14.50	18.00	18.00								
	45	6175	18.00	9.50	12.50	14.50	18.00	18.00								
	49	6195	18.00	9.50	12.50	14.50	18.00	18.00								
	53	6215	18.00	9.50	12.50	14.50	18.00	18.00								
	57	6235	18.00	9.50	12.50	14.50	18.00	18.00								
	61	6255	18.00	9.50	12.50	14.50	18.00	18.00								
	65	6275	18.00	9.50	12.50	14.50	18.00	18.00								
	69	6295	18.00	9.50	12.50	14.50	18.00	18.00								
	73	6315	18.00	9.50	12.50	14.50	18.00	18.00								
	77	6335	18.00	9.50	12.50	14.50	18.00	18.00								
81	6355	18.00	9.50	12.50	14.50	18.00	18.00									
85	6375	18.00	9.50	12.50	14.50	18.00	18.00									
89	6395	18.00	9.50	12.50	14.50	18.00	18.00									
93	6415	18.00	9.50	12.00	13.50	18.00	18.00									
117	6535	16.50	8.50	11.00	13.50	17.00	17.00									
121	6555	17.00	8.50	11.50	13.50	17.00	17.00	123	6565	18.00	18.00					
125	6575	17.00	8.50	11.50	13.50	17.00	17.00									
129	6595	17.00	8.50	11.50	13.50	17.00	17.00	131	6605	18.00	18.00					
133	6615	17.00	8.50	11.50	13.50	17.00	17.00					135	6625	15.50	20.00	
137	6635	17.00	8.50	11.50	13.50	17.00	17.00	139	6645	18.00	18.00					
141	6655	17.00	8.50	11.50	13.50	17.00	17.00									
145	6675	17.00	8.50	11.50	13.50	17.00	17.00									
149	6695	17.00	8.50	11.50	13.50	17.00	17.00	147	6685	18.00	18.00	151	6705	15.50	20.00	
153	6715	17.00	8.50	11.50	13.50	17.00	17.00									
157	6735	17.00	8.50	11.50	13.50	17.00	17.00	155	6725	18.00	18.00					
161	6755	17.00	8.50	11.50	13.50	17.00	17.00									
165	6775	17.00	8.50	11.50	13.50	17.00	17.00	163	6765	18.00	18.00	167	6785	15.50	20.00	
169	6795	17.00	8.50	11.50	13.50	17.00	17.00									
173	6815	17.00	8.50	11.50	13.50	17.00	17.00	171	6805	18.00	18.00					
177	6835	17.00	8.50	11.50	13.50	17.00	17.00									
181	6855	17.00	8.50	11.50	13.50	17.00	17.00	179	6845	18.00	18.00					
185	6875															

Max-power state – Standard Power (Indoor/Outdoor) (continued) – Chain 0/1

Freq. Band	160 MHz				320 MHz							
			Maximum Output Power (dBm) SISO/MIMO per Chain				Maximum Output Power (dBm) SISO/MIMO per Chain				Maximum Output Power (dBm) SISO/MIMO per chain	
	Ch #	Center Freq	996T*2 996T*2+484T, 996T*3, 996T*3+484T	HE160/ EHT160	Ch #	Center Freq	996T*4	EHT320	Ch #	Center Freq	996T*4	EHT320
U-NII-5 (5.925 to 6.425 GHz)	15	6025	16.00	18.00	31	6105	16.00	16.00				
	47	6185	16.00	18.00					63	6265	16.00	16.00
	79	6345	18.00	18.00								
U-NII-7 (6.525 to 6.875 GHz)												
	143	6665	16.00	16.00								

Max-power state – Low Power Indoor – Chain 0/1

Freq. Band	20 MHz & Partial BWs								40 MHz				80 MHz																																																																			
	Maximum Output Power (dBm) SISO/MIMO per Chain								Maximum Output Power (dBm) SISO/MIMO per Chain				Maximum Output Power (dBm) SISO/MIMO per Chain																																																																			
	Ch #	Center Freq	11a	26T	52T, 52T+26T	106T, 106T+26T	242T	HE20/ EHT20	Ch #	Center Freq	484T, 484T+242T	HE40/ EHT40	Ch #	Center Freq	996T, 996T+484T	HE80/ EHT80																																																																
U-NII-5 (5.925 to 6.425 GHz)	1	5935	0.50	-8.00	-5.00	-2.00	1.00	1.00	3	5965	3.50	3.50	7	5985	6.50	6.50																																																																
	5	5955	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	9	5975	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	13	6015	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	17	6035	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	21	6055	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	25	6075	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	29	6095	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	33	6115	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	37	6135	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	41	6155	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	45	6175	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	49	6195	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	53	6215	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	57	6235	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	61	6255	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	65	6275	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	69	6295	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	73	6315	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	77	6335	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	81	6355	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	85	6375	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	89	6395	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
	93	6415	0.50	-8.00	-5.00	-2.00	1.00	1.00																																																																								
97	6435	1.00	-7.50	-4.50	-1.50	1.50	1.50																																																																									
101	6455	1.00	-7.50	-4.50	-1.50	1.50	1.50																																																																									
105	6475	1.00	-7.50	-4.50	-1.50	1.50	1.50																																																																									
109	6495	1.00	-7.50	-4.50	-1.50	1.50	1.50																																																																									
113	6515	1.00	-7.50	-4.50	-1.50	1.50	1.50																																																																									
117	6535	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
121	6555	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
125	6575	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
129	6595	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
133	6615	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
137	6635	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
141	6655	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
145	6675	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
149	6695	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
153	6715	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
157	6735	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
161	6755	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
165	6775	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
169	6795	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
173	6815	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
177	6835	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
181	6855	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
185	6875	-0.50	-9.00	-6.00	-3.00	0.00	0.00																																																																									
189	6895	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
193	6915	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
197	6935	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
201	6955	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
205	6975	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
209	6995	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
213	7015	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
217	7035	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
221	7055	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
225	7075	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
229	7095	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
233	7115	0.00	-8.50	-5.50	-2.50	0.50	0.50																																																																									
U-NII-6 (6.425 to 6.525 GHz)	99	6445	5.00	5.00	5.00	5.00	5.00	5.00	99	6445	5.00	5.00	103	6465	6.50	6.50																																																																
	107	6485	5.00	5.00	5.00	5.00	5.00	5.00																																																																								
	115	6525	3.00	3.00	3.00	3.00	3.00	3.00									115	6525	3.00	3.00	119	6545	5.00	5.00																																																								
	123	6565	3.00	3.00	3.00	3.00	3.00	3.00																																																																								
	131	6605	3.00	3.00	3.00	3.00	3.00	3.00																	131	6605	3.00	3.00	135	6625	5.00	5.00																																																
	139	6645	3.00	3.00	3.00	3.00	3.00	3.00																																																																								
	147	6685	3.00	3.00	3.00	3.00	3.00	3.00																									147	6685	3.00	3.00	151	6705	5.00	5.00																																								
	155	6725	3.00	3.00	3.00	3.00	3.00	3.00																																																																								
	163	6765	3.00	3.00	3.00	3.00	3.00	3.00																																	163	6765	3.00	3.00	167	6785	5.00	5.00																																
	171	6805	3.00	3.00	3.00	3.00	3.00	3.00																																																																								
	179	6845	3.00	3.00	3.00	3.00	3.00	3.00																																									179	6845	3.00	3.00	183	6865	5.00	5.00																								
	187	6885	3.00	3.00	3.00	3.00	3.00	3.00																																																																								
	195	6925	3.50	3.50	3.50	3.50	3.50	3.50																																																	195	6925	3.50	3.50	199	6945	6.50	6.50																
	203	6965	3.50	3.50	3.50	3.50	3.50	3.50																																																																								
	211	7005	3.50	3.50	3.50	3.50	3.50	3.50																																																									211	7005	3.50	3.50	215	7025	6.50	6.50								
	219	7045	3.50	3.50	3.50	3.50	3.50	3.50																																																																								
	227	7085	3.50	3.50	3.50	3.50	3.50	3.50																																																																	227	7085	3.50	3.50				

Max-power state – Low Power Indoor (continued) – Chain 0/1

Freq. Band	160 MHz				320 MHz							
	Ch #	Center Freq	Maximum Output Power (dBm) SISO/MIMO per Chain		Ch #	Center Freq	Maximum Output Power (dBm) SISO/MIMO per Chain		Ch #	Center Freq	Maximum Output Power (dBm) SISO/MIMO per chain	
			996T*2 996T*2+484T, 996T*3, 996T*3+484T	HE160/ EHT160			996T*4	EHT320			996T*4	EHT320
U-NII-5 (5.925 to 6.425 GHz)	15	6025	7.50	7.50	31	6105	12.00	12.00	63	6265	12.00	12.00
	47	6185	7.50	7.50								
	79	6345	7.00	7.00								
U-NII-6 (6.425 to 6.525 GHz)	111	6505	7.00	7.00	95	6425	12.00	12.00	127	6585	11.00	11.00
U-NII-7 (6.525 to 6.875 GHz)	143	6665	7.00	7.00	159	6745	11.00	11.00				
	175	6825	7.00	7.00								
U-NII-8 (6.875 to 7.125 GHz)	207	6985	7.50	7.50					191	6905	11.00	11.00

SAR back-off power state – Standard Power (Indoor/Outdoor) / Low Power Indoor – Chain 0/1

SAR back-off power levels are to be used in that state unless Max power state is lower. 6GHz SAR back-off limit is same for SP and LPI.

Frequency Band	6G Channel Groups SP & LPI	BW: 20/40/80/160/320 all ax/be partial		
		Channels	Chain 0 (Left)	Chain 1 (Right)
5.925 to 6.425 GHz	0	1 to 45	10.5	10.25
	1	49 to 93	10.5	10.25
6.425 to 6.525 GHz	2	97 to 113	10.5	10.25
6.525 to 6.875 GHz	3	117 to 185	10.5	10.25
6.875 to 7.125 GHz	4	189 to 233	10.5	10.25

Wi-Fi 6GHz Measured Results – SAR Back-Off Power State

Band	Mode	Power State	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
6GHz	802.11be (EHT320)	SP / LPI	31	6105	10.18	10.50	Yes	9.37	10.25	Yes
		LPI	95	6425	9.59	10.50		9.56	10.25	
			159	6745	10.04	10.50		9.36	10.25	
			191	6905	9.89	10.50		9.48	10.25	

Note(s):

4 channels chosen instead of aggregated 5 due to coverage of 320 MHz channels following FCC inquiry.

Duty Factor Measured Results


Mode	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11be (EHT320)	5.456	5.476	99.6%	1.00

Note(s):

Duty Cycle = (T on / period) * 100%

Duty Cycle plots

802.11be (EHT320)

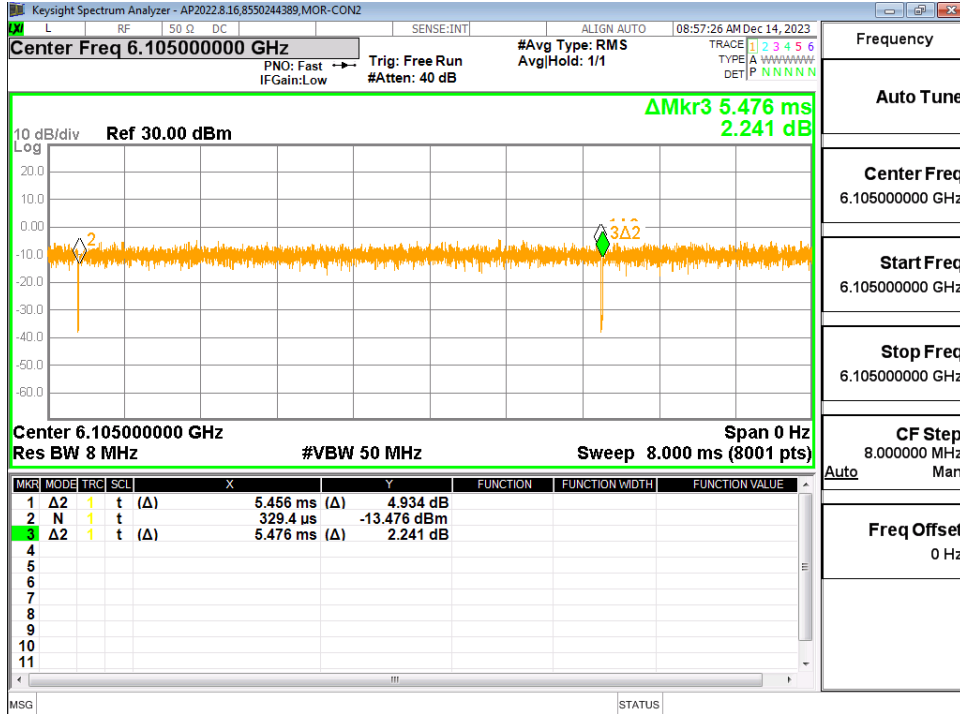

9.4. Bluetooth

Maximum Output Power (Tune-up Limit) for Bluetooth

SAR measurement is not required for the EDR and LE. When the secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode.

Bluetooth Full Power Tune-Up

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up	Chain 1 Tune-Up
Bluetooth 2.4 GHz	BR GFSK	0	2402	20.50	20.50
		39	2441	20.50	20.50
		78	2480	20.50	20.50
	EDR, $\pi/4$ DQPSK	0	2402	17.50	17.50
		39	2441	17.50	17.50
		78	2480	17.50	17.50
	EDR, 8-DPSK	0	2402	17.50	17.50
		39	2441	17.50	17.50
		78	2480	17.50	17.50
	LE, GFSK	0	2402	19.50	19.50
		19	2440	19.50	19.50
		39	2480	19.50	19.50

Bluetooth WLAN Simultaneous Power Tune-Up

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Tune-Up	Chain 1 Tune-Up
Bluetooth 2.4 GHz	BR GFSK	0	2402	16.00	15.50
		39	2441	16.00	15.50
		78	2480	16.00	15.50
	EDR, $\pi/4$ DQPSK	0	2402	16.00	15.50
		39	2441	16.00	15.50
		78	2480	16.00	15.50
	EDR, 8-DPSK	0	2402	16.00	15.50
		39	2441	16.00	15.50
		78	2480	16.00	15.50
	LE, GFSK	0	2402	16.00	15.50
		19	2440	16.00	15.50
		39	2480	16.00	15.50

Bluetooth Measured Results Full Power

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
Bluetooth 2.4 GHz	BR GFSK	0	2402	20.34	20.50	Yes	19.40	20.50	Yes
		39	2441	18.61	20.50		19.70	20.50	
		78	2480	19.67	20.50		18.77	20.50	

Bluetooth Measured Results WLAN Simultaneous Power

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
Bluetooth 2.4 GHz	BR GFSK	0	2402	14.61	16.00	Yes	14.90	15.50	Yes
		39	2441	14.98	16.00		15.49	15.50	
		78	2480	14.00	16.00		14.36	15.50	

Duty Factor Measured Results


Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.88	3.75	76.80%	1.30

Note(s):

Duty Cycle = (T on / period) * 100%

Duty Cycle plots

GFSK

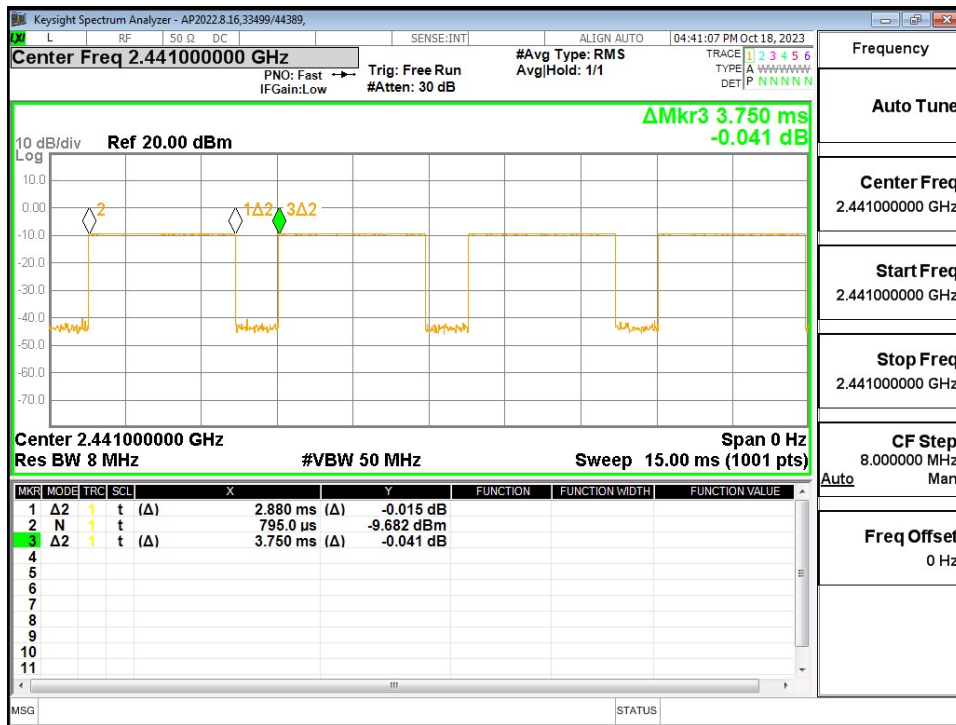

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN and Bluetooth = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported* SAR for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported* SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the *initial test position*, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the *initial test position*.

10.1. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Standalone	802.11b	Chain 0	0	Rear of Display	6	2437	0.071	97.9%	20.25	19.16	0.073	0.096	1
				Bottom	6	2437	0.457	97.9%	20.25	19.16	0.441	0.579	
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Standalone	802.11b	Chain 1	0	Rear of Display	6	2437	0.025	97.9%	20.25	18.81	0.027	0.038	2
				Bottom	6	2437	0.290	97.9%	20.25	18.81	0.301	0.428	

10.2. Wi-Fi (U-NII Band)

UNII-1 &2A

When the specified maximum output power is the same for both UNII band 1 and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is

- ≤ 1.2 W/kg, SAR is not required for UNII band 1
- > 1.2 W/kg, both bands should be tested independently for SAR.

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Standalone	802.11ac VHT40	Chain 0	0	Rear of Display	62	5310	0.185	99.1%	14.25	13.82	0.188	0.209	3
				Bottom	62	5310	0.542	99.1%	14.25	13.82	0.561	0.625	
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Standalone	802.11a	Chain 1	0	Rear of Display	56	5280	0.093	99.1%	16.50	16.33	0.115	0.121	4
				Bottom	52	5260	0.876	99.1%	16.50	16.30	0.916	0.968	
					56	5280	0.846	99.1%	16.50	16.33	0.855	0.897	
					60	5300	0.964	99.1%	16.50	16.30	0.961	1.015	

UNII-2C

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Standalone	802.11ac VHT80	Chain 0	0	Rear of Display	122	5610	0.149	97.6%	14.75	14.65	0.179	0.188	5
				Bottom	106	5530	0.926	97.6%	14.75	14.62	0.876	0.925	
					122	5610	0.831	97.6%	14.75	14.65	0.943	0.989	
					138	5690	0.873	97.6%	14.75	14.32	0.916	1.036	
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Standalone	802.11ac VHT160	Chain 1	0	Rear of Display	114	5570	0.14	95.1%	14.25	13.96	0.143	0.161	6
				Bottom	114	5570	0.915	95.1%	14.25	13.96	0.960	1.079	

UNII-3 & 4

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Standalone	802.11ac VHT160	Chain 0	0	Rear of Display	163	5815	0.141	95.1%	13.00	12.52	0.143	0.168	7
				Bottom	163	5815	0.888	95.1%	13.00	12.52	0.968	1.137	
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Standalone	802.11ac VHT160	Chain 1	0	Rear of Display	163	5815	0.093	95.1%	14.25	13.62	0.091	0.111	8
				Bottom	163	5815	0.893	95.1%	14.25	13.62	0.951	1.156	

UNII-3 & 4 (TAS)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)	Plot No.
									Plim (Configured)	Plim Measured (QRCT)	Meas.	
Standalone	802.11a	Chain 0	0	Bottom	157	5785	0.484	99.1%	12.00	10.68	0.515	9
		Chain 1			157	5785	0.458	99.1%	13.25	11.23	0.483	10

Note(s):

802.11ac VHT160 was selected for SAR testing based on KDB 248227 test configuration selection guidance. Because the above test cases were not subject to Part 1 static condition tests, these were additionally measured under static conditions specifically for normalization during TAS validation in Part 2.

UNII-5 & 6 & 7 & 8

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Standalone	802.11be EHT320	Chain 0	0	Rear of Display	31	6105	0.082	99.6%	10.50	10.18	0.095	0.103	
				Bottom	31	6105	0.435	99.6%	10.50	10.18	0.416	0.449	11
					95	6425	0.370	99.6%	10.50	9.59	0.345	0.427	
					159	6745	0.370	99.6%	10.50	10.04	0.335	0.374	
					191	6905	0.349	99.6%	10.50	9.89	0.318	0.367	
Standalone	802.11be EHT320	Chain 1	0	Rear of Display	159	6745	0.108	99.6%	10.25	9.36	0.066	0.081	
				Bottom	31	6105	0.320	99.6%	10.25	9.37	0.293	0.382	
					63	6265	0.288	99.6%	10.25	9.56	0.262	0.327	
					159	6745	0.424	99.6%	10.25	9.36	0.323	0.398	12
					191	6905	0.295	99.6%	10.25	9.48	0.261	0.331	

UNII-5 & 6 & 7 & 8 Absorbed Power Density (APD)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		Meas. APD (W/m ² over 4cm ²)	Scaled APD (W/m ² over 4cm ²)
								Tune-up Limit	Meas.		
Standalone	802.11be EHT320	Chain 0	0	Rear of Display	31	6105	99.6%	10.50	10.18	0.763	0.825
				Bottom	31	6105	99.6%	10.50	10.18	3.200	3.459
					95	6425	99.6%	10.50	9.59	2.700	3.343
					159	6745	99.6%	10.50	10.04	2.590	2.891
					191	6905	99.6%	10.50	9.89	2.510	2.900
Standalone	802.11be EHT320	Chain 1	0	Rear of Display	159	6745	99.6%	10.25	9.36	0.495	0.610
				Bottom	31	6105	99.6%	10.25	9.37	2.190	2.693
					95	6425	99.6%	10.25	9.56	1.870	2.201
					159	6745	99.6%	10.25	9.36	2.370	2.921
					191	6905	99.6%	10.25	9.48	1.900	2.278

10.3. Bluetooth

Bluetooth Full Power

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Standalone	BR GFSK DH5	Chain 0	0	Rear of Display	0	2402	20.50	20.34	0.094	0.098	
				Bottom	0	2402	20.50	20.34	1.030	1.069	13
					39	2441	20.50	18.61	0.622	0.961	
					78	2480	20.50	19.67	0.410	0.496	
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
Tune-up Limit	Meas.	Meas.	Scaled								
Standalone	BR GFSK DH5	Chain 1	0	Rear of Display	39	2441	20.50	19.70	0.050	0.060	
				Bottom	0	2402	20.50	19.40	0.713	0.919	14
					39	2441	20.50	19.70	0.618	0.743	
					78	2480	20.50	18.77	0.259	0.386	

Bluetooth WLAN Simultaneous Power

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Standalone	BR GFSK DH5	Chain 0	0	Rear of Display	39	2441	16.00	14.98	0.018	0.023	
				Bottom	39	2441	16.00	14.98	0.278	0.352	15
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
Tune-up Limit	Meas.	Meas.	Scaled								
Standalone	BR GFSK DH5	Chain 1	0	Rear of Display	39	2441	15.50	15.49	0.011	0.011	
				Bottom	39	2441	15.50	15.49	0.277	0.278	16

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated		Second Repeated		Third Repeated
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)
2400	Wi-Fi 802.11b	Standalone	Bottom	No	0.441	N/A	N/A	N/A	N/A	N/A
	BT	Standalone	Bottom	Yes	1.030	1.020	1.01	N/A	N/A	N/A
5200	Wi-Fi 802.11a	Standalone	Bottom	Yes	0.961	0.922	1.04	N/A	N/A	N/A
5500	Wi-Fi 802.11ac	Standalone	Bottom	Yes	0.960	0.934	1.03	N/A	N/A	N/A
5800	Wi-Fi 802.11ac	Standalone	Bottom	Yes	0.968	0.945	1.02	N/A	N/A	N/A
6500	Wi-Fi 802.11be	Standalone	Bottom	No	0.416	N/A	N/A	N/A	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20.

12. Simultaneous Transmission Conditions

	Chain 0				Chain 1				Comment
	2GHz	5GHz	6GHz	BT	2GHz	5GHz	6GHz	BT	
1	x				x				2GHz MIMO
2		x				x			5GHz MIMO
3			x				x		6GHz MIMO
4				x				x	BT iBF
5	x							x	2.4GHz + BT
6				x	x				BT+ 2.4GHz
7		x						x	5GHz +BT
8			x					x	6GHz + BT
9				x		x			BT + 5GHz
10				x			x		BT + 6GHz
11		x		x		x			(5GHz +BT) +5GHz
12			x	x			x		(6GHz +BT) +6GHz
13		x				x		x	5GHz + (5GHz +BT)
14			x				x	x	6GHz + (6GHz +BT)
15*	x	x			x	x			(2.4GHz + 5GHz) + (2.4GHz + 5GHz)
16*	x		x		x		x		(2.4GHz + 6GHz) + (2.4GHz + 6GHz)
17*	x	x				x			(2.4GHz+5GHz) +5GHz
18*	x		x				x		(2.4GHz+6GHz) +6GHz
19*		x			x	x			5GHz+ (2.4GHz+5GHz)
20*			x		x		x		6GHz+ (2.4GHz+6GHz)
21*				x	x	x			BT+ (2.4GHz+5GHz)
22*				x	x		x		BT + (2.4GHz+6GHz)
23*	x	x						x	(2.4GHz +5GHz) +BT
24*	x		x					x	(2.4GHz +6GHz) +BT
25*		x		x	x	x			(5GHz + BT) + (2.4GHz +5GHz)
26*			x	x	x		x		(6GHz + BT) + (2.4GHz +6GHz)
27*	x	x				x		x	(2.4GHz+5GHz) + (5GHz+BT)
28*	x		x				x	x	(2.4GHz+6GHz) + (6GHz+BT)
29	x					x			2.4GHz+ 5GHz
30	x						x		2.4GHz+ 6GHz
31		x			x				5GHz + 2.4GHz
32			x		x				6GHz + 2.4GHz
33						x		x	5GHz +BT
34							x	x	6GHz + BT
35		x		x					5GHz +BT
36			x	x					6GHz + BT
37*	x	x			x				2.4GHz +5GHz +2.4GHz
38*	x		x		x				2.4GHz +6GHz +2.4GHz
39*	x				x	x			2.4GHz +(2.4GHz+5GHz)
40*	x				x		x		2.4GHz +(2.4GHz+6GHz)
41*					x	x			2.4GHz + 5GHz
42*					x		x		2.4GHz + 6GHz
43*	x	x							2.4GHz+5GHz
44*	x		x						2.4GHz+6GHz
45		x		x		x		x	5GHz +BT + 5GHz+BT
46			x	x			x	x	6GHz +BT + 6GHz+BT

Note:

* As declared by manufacturer, Fast Connect TAS has the ability to declare different antenna groups, in which the algorithm will ensure that any Wi-Fi Simultaneous scenarios occurring in a given antenna group will stay under the Plimit. Therefore, any simultaneous case that consists of (2.4GHz + 5GHz) or (2.4GHz + 6GHz) on the same antenna group, then TAS will handle such a situation. Therefore, these simultaneous cases are not considered in §12.1.

12.1. Simultaneous Transmission SAR

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest *reported* SAR for the frequency bands should be used to determine **SAR₁**, or **SAR₂**. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01.

12.2. Sum of the SAR for WLAN 2.4GHz, 5GHz, and 6GHz and Bluetooth WLAN Simultaneous Power

RF Exposure Conditions	Standalone SAR (W/kg)							
	WLAN 2.4 GHz		WLAN 5 GHz		WLAN 6 GHz		Bluetooth WLAN Simultaneous Power	
	Chain 0 ①	Chain 1 ②	Chain 0 ③	Chain 1 ④	Chain 0 ⑤	Chain 1 ⑥	Chain 0 ⑦	Chain 1 ⑧
Standalone	0.579	0.428	1.137	1.156	0.449	0.398	0.352	0.278

Σ 1-g SAR (W/kg)							
2.4 GHz + BT		5 GHz + BT		6 GHz + BT			
① + ⑧	② + ⑦	③ + ⑧	④ + ⑦	⑤ + ⑧	⑥ + ⑦		
0.857	0.780	1.415	1.508	0.727	0.750		
Σ 1-g SAR (W/kg)				Σ 1-g SAR (W/kg)			
2.4 GHz MIMO		5 GHz MIMO		6 GHz MIMO		BT MIMO	
① + ②		③ + ④		⑤ + ⑥		⑦ + ⑧	
1.007		2.293		0.847		0.630	
Σ 1-g SAR (W/kg)				Σ 1-g SAR (W/kg)			
2.4 GHz + 5 GHz			2.4 GHz + 6 GHz				
① + ④		② + ③		① + ⑥		② + ⑤	
1.735		1.565		0.977		0.877	
Σ 1-g SAR (W/kg)				Σ 1-g SAR (W/kg)			
5 GHz + BT			6 GHz + BT				
③ + ⑦		④ + ⑧		⑤ + ⑦		⑥ + ⑧	
1.489		1.434		0.801		0.676	
Σ 1-g SAR (W/kg)				Σ 1-g SAR (W/kg)			
5 GHz MIMO + BT			6 GHz MIMO + BT				
③ + ④ + ⑦		③ + ④ + ⑧		⑤ + ⑥ + ⑦		⑤ + ⑥ + ⑧	
2.645		2.571		1.199		1.125	
Σ 1-g SAR (W/kg)				Σ 1-g SAR (W/kg)			
5 GHz MIMO + BT MIMO			6 GHz MIMO + BT MIMO				
③ + ④ + ⑦ + ⑧		⑤ + ⑥ + ⑦ + ⑧		⑤ + ⑥ + ⑦ + ⑧		⑤ + ⑥ + ⑦ + ⑧	
2.923		1.477					

Note:

Simultaneous combinations that exceed 1.6 W/kg, as shown highlighted in red, are addressed with SPLSR in the following Section §12.3.

12.3. SAR to Peak Location Separation Ratio (SPLSR)

Figure 1 – Bottom – WLAN 5GHz MIMO on Chain 0 + Chain 1

Mode		Peak SAR	X	Y	Z	Test Case	d: Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
		W/kg	mm	mm	mm				
UNII-3&4 on Chain 0	③	1.137	-108.4	104.7	-177.0	③+④	190.30	0.02	No
UNII-3&4 on Chain 1	④	1.156	-108.9	-85.6	-177.0				

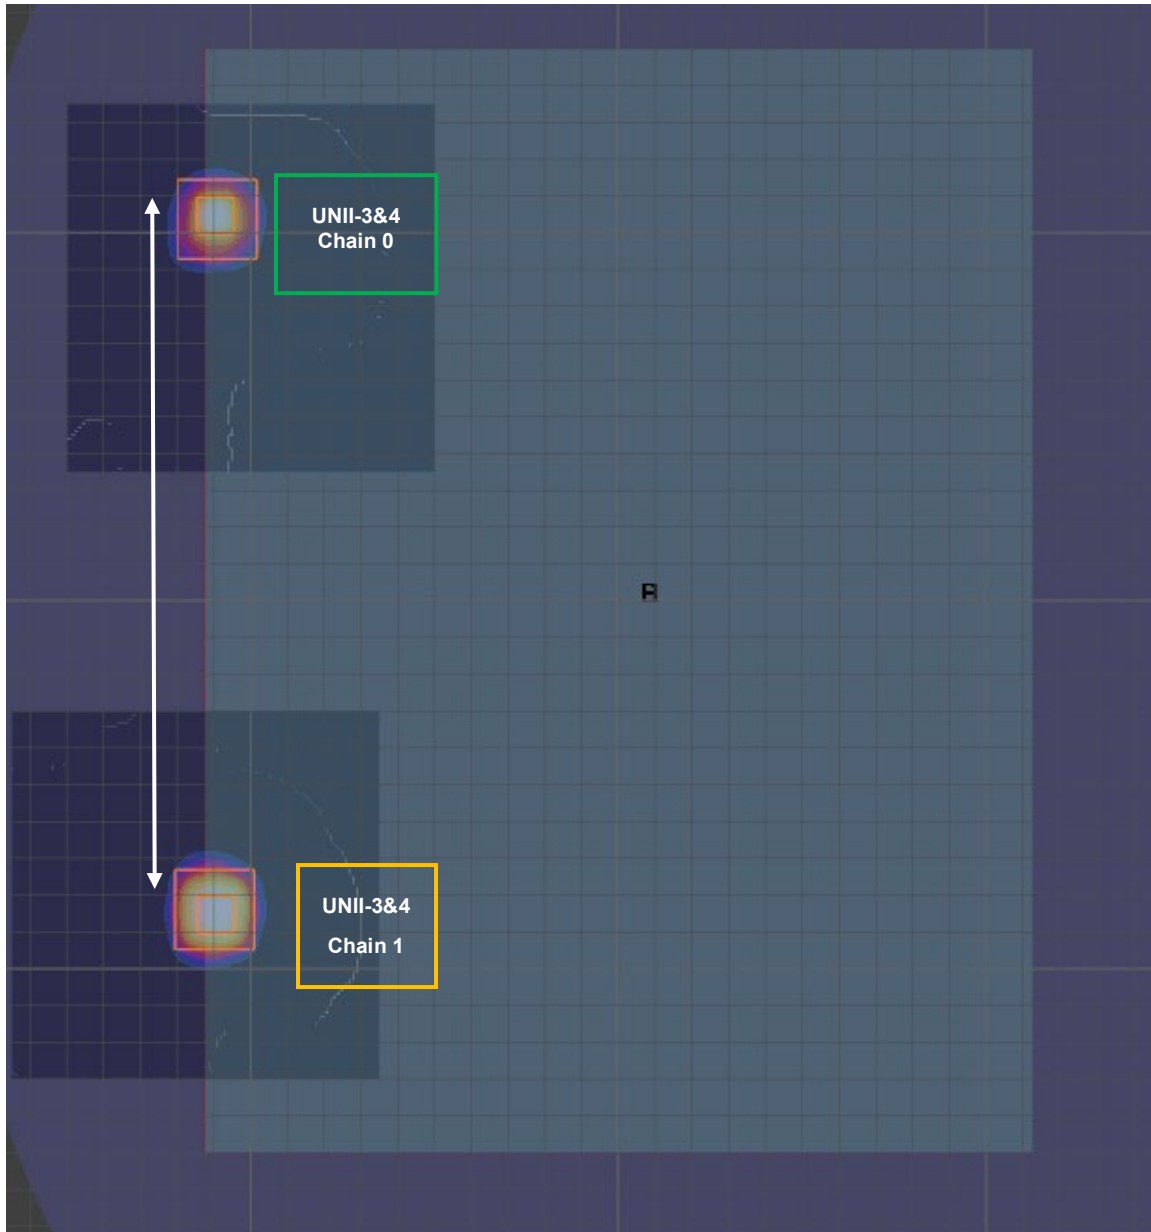


Figure 2 – Bottom – WLAN 2.4GHz on Chain 0 + WLAN 5GHz on Chain 1

Mode	Peak SAR W/kg	X mm	Y mm	Z mm	Test Case	d: Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)	
2.4GHz on Chain 0	①	0.579	-113.0	112.5	-177.0	①+④	198.14	0.01	No
UNII-3&4 on Chain 1	④	1.156	-108.9	-85.6	-177.0				

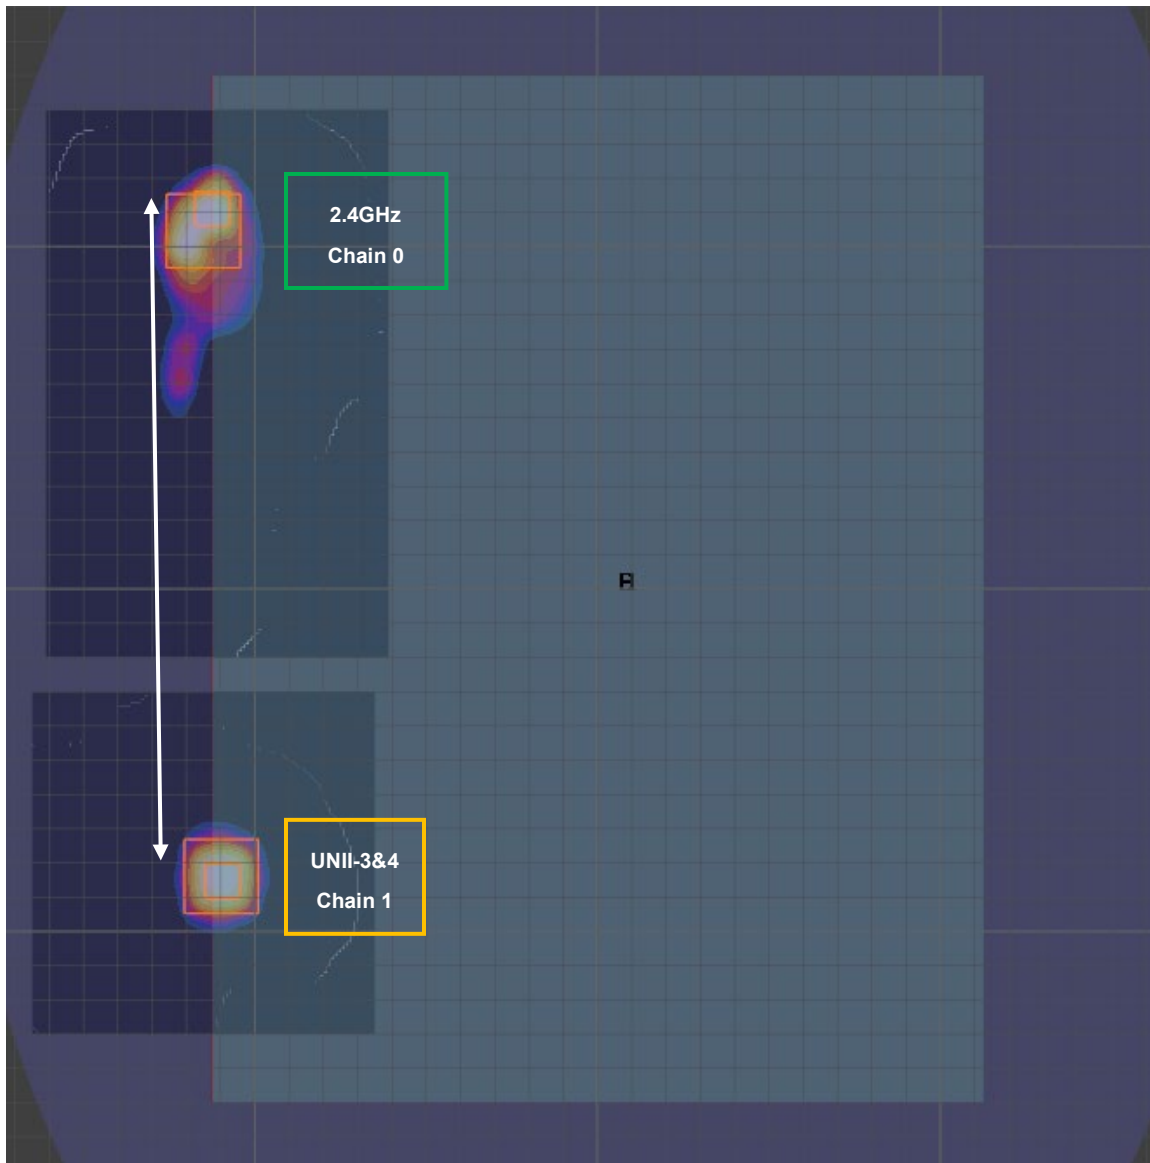


Figure 3 – Bottom – WLAN 5GHz + BT on Chain 0 + WLAN 5GHz on Chain 1

Mode	Peak SAR W/kg	X mm	Y mm	Z mm	Test Case	d: Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)	
UNII-3&4 + BT on Chain 0	③ + ⑦	1.489	-110.9	104.2	-177.0	③ + ⑦ + ④	189.81	0.02	No
UNII-3&4 on Chain 1	④	1.156	-108.9	-85.6	-177.0				

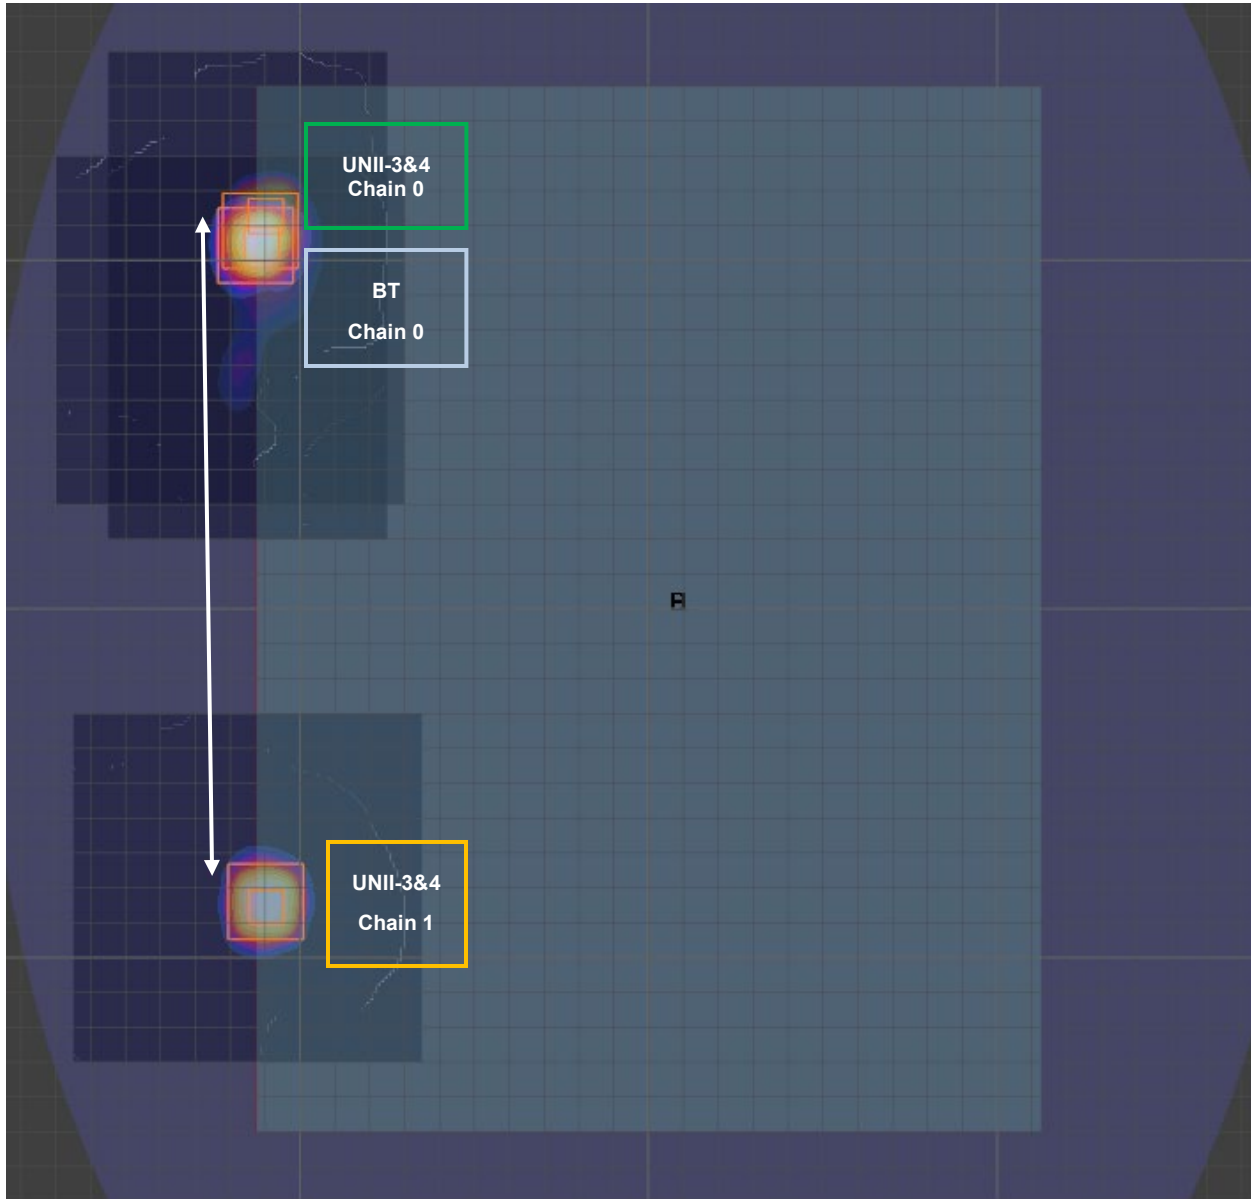


Figure 4 – Bottom – WLAN 5GHz on Chain 0 + WLAN 5GHz + BT on Chain 1

Mode	Peak SAR W/kg	X mm	Y mm	Z mm	Test Case	d: Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)	
UNII-3&4 on Chain 0	③	1.137	-110.9	104.2	-177.0	③ + ④ + ⑧	181.21	0.02	No
UNII-3&4 + BT on Chain 1	④ + ⑧	1.434	-109.0	-77.0	-177.0				


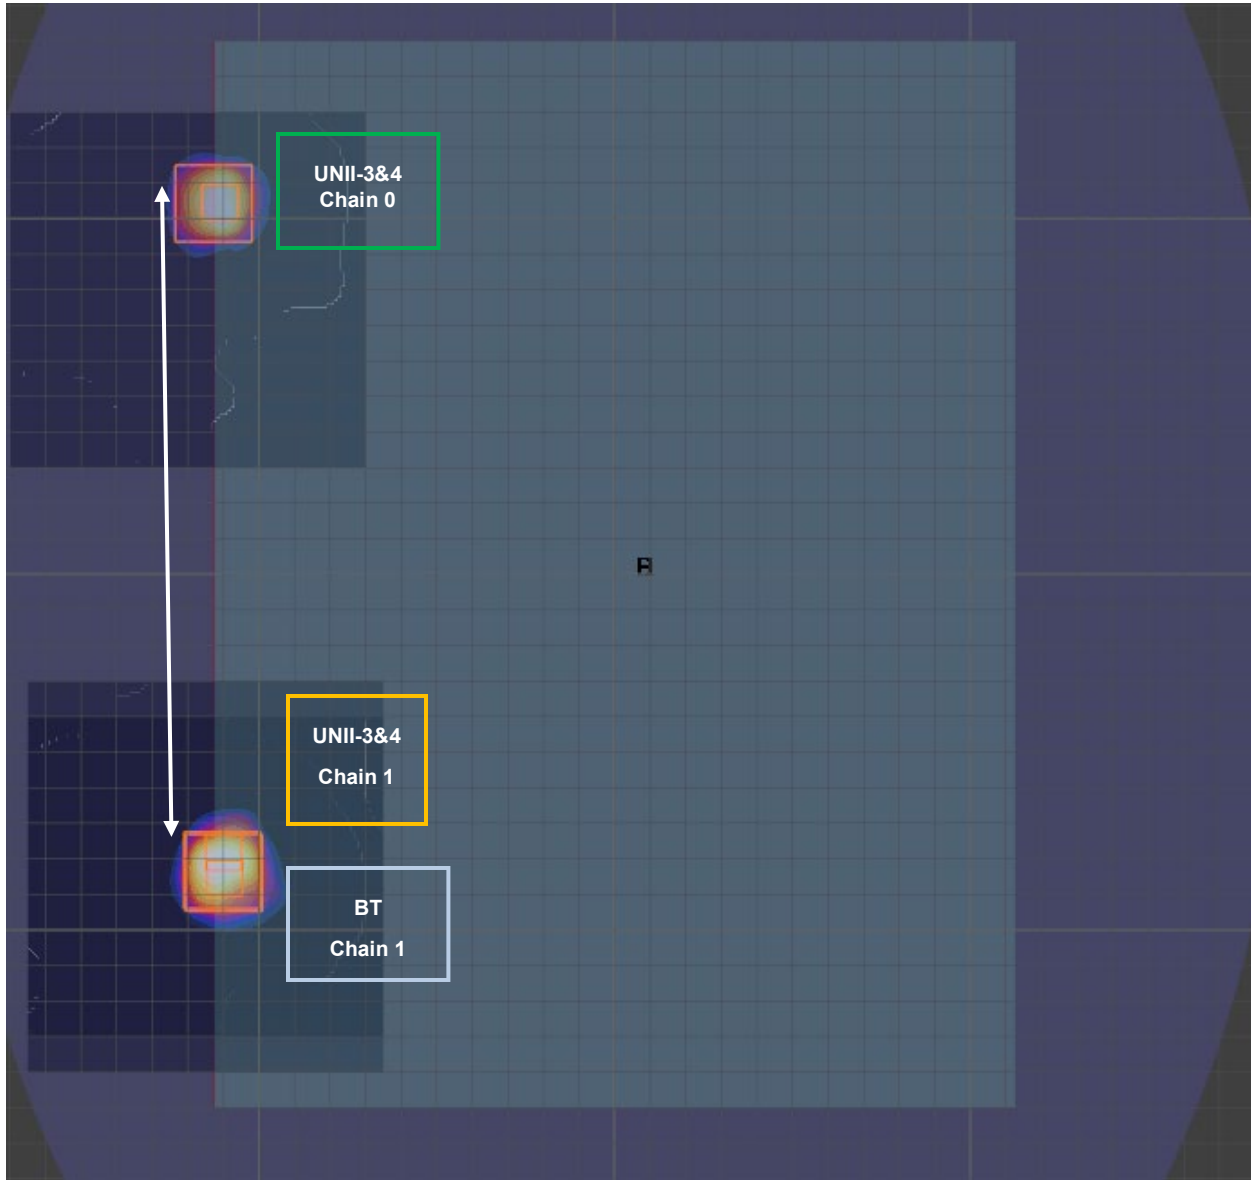


Figure 5 – Bottom – 5GHz MIMO + BT MIMO

Mode	Peak SAR W/kg	X mm	Y mm	Z mm	Test Case	d: Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)	
UNII-3&4 + BT on Chain 0	③ + ⑦	1.489	-110.9	104.2	-177.0	③ + ⑦ + ④ + ⑧	189.81	0.03	No
UNII-3&4 + BT on Chain 1	④ + ⑧	1.434	-108.9	-85.6	-177.0				

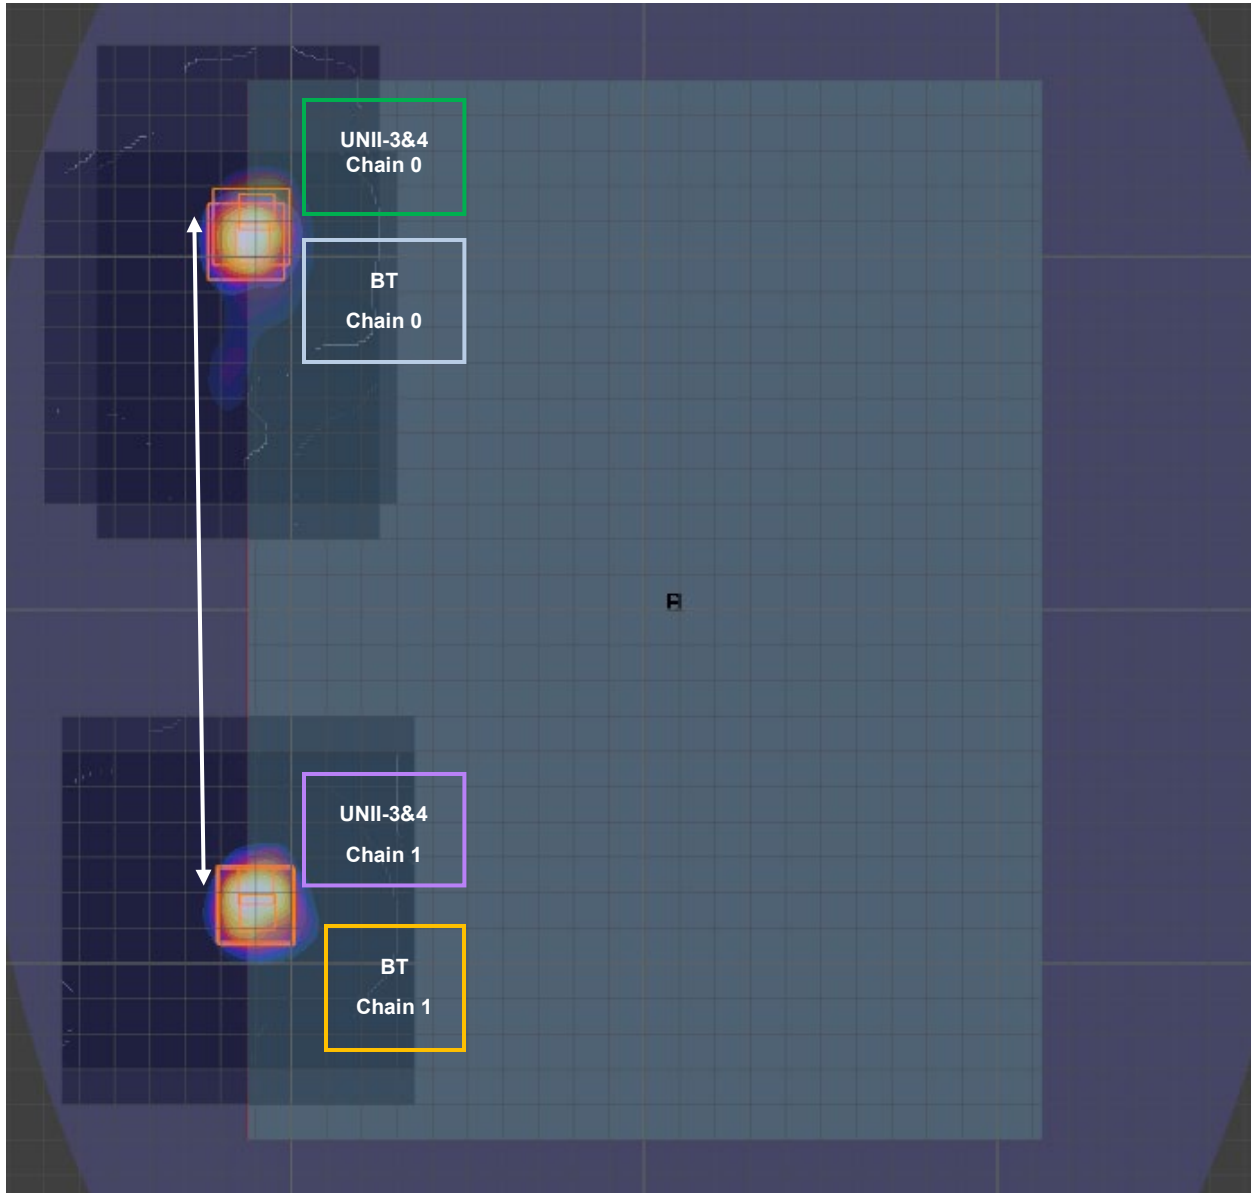

Conclusion:
 Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

END OF REPORT