

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_4mm_Ch1;Main Ant


Communication System: 802.11b; Frequency: 2412.0 MHz; Duty Cycle: 1:1.011
Medium: HSL_2450_230323 Medium parameters used: $f=2412.0$ MHz; $\sigma=1.81$ S/m; $\epsilon_r=39.1$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.54, 7.54, 7.54); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.730 W/kg; SAR (10g) = 0.376 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.783 W/kg; SAR (8g) = 0.431 W/kg; SAR (10g) = 0.395 W/kg

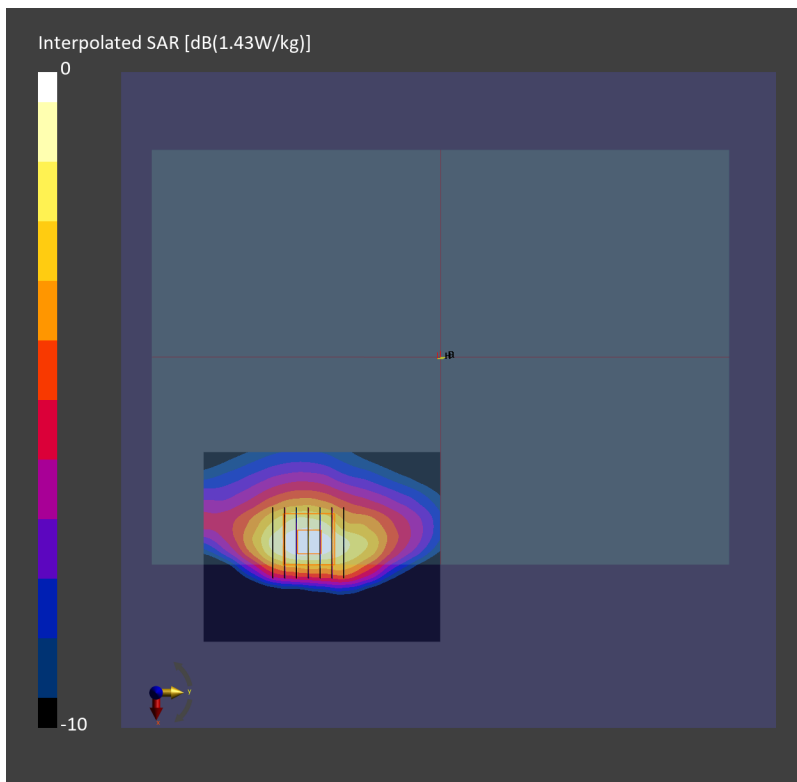

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_4mm_Ch42;Main Ant


Communication System:802.11ac; Frequency: 5210.0 MHz; Duty Cycle: 1:1.013
Medium: HSL_5G_230323 Medium parameters used: $f= 5210.0$ MHz; $\sigma= 4.68$ S/m; $\epsilon_r = 35.9$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.34, 5.34, 5.34); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10544-AAC

Area Scan (60.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.859 W/kg; SAR (10g) = 0.310 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.12 dB
SAR (1g) = 0.929 W/kg; SAR (8g) = 0.345 W/kg; SAR (10g) = 0.300 W/kg

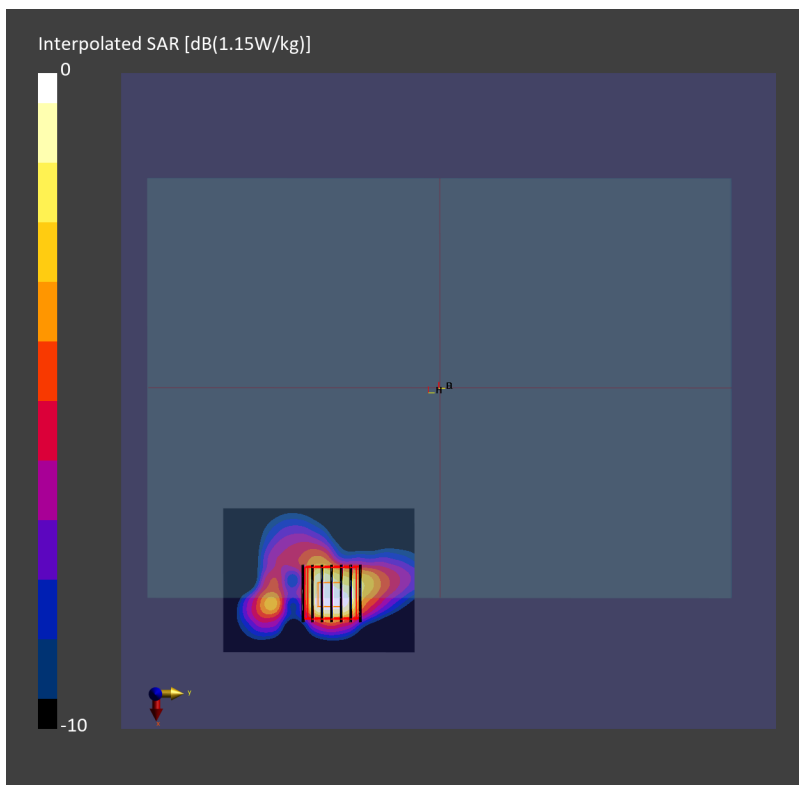

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch58;Main Ant


Communication System: 802.11ac; Frequency: 5290.0 MHz; Duty Cycle: 1:1.013
Medium: HSL_5G_230324 Medium parameters used: $f= 5290.0$ MHz; $\sigma= 4.81$ S/m; $\epsilon_r = 36.1$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.34, 5.34, 5.34); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10544-AAC

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.572 W/kg; SAR (10g) = 0.177 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.877 W/kg; SAR (8g) = 0.233 W/kg; SAR (10g) = 0.193 W/kg

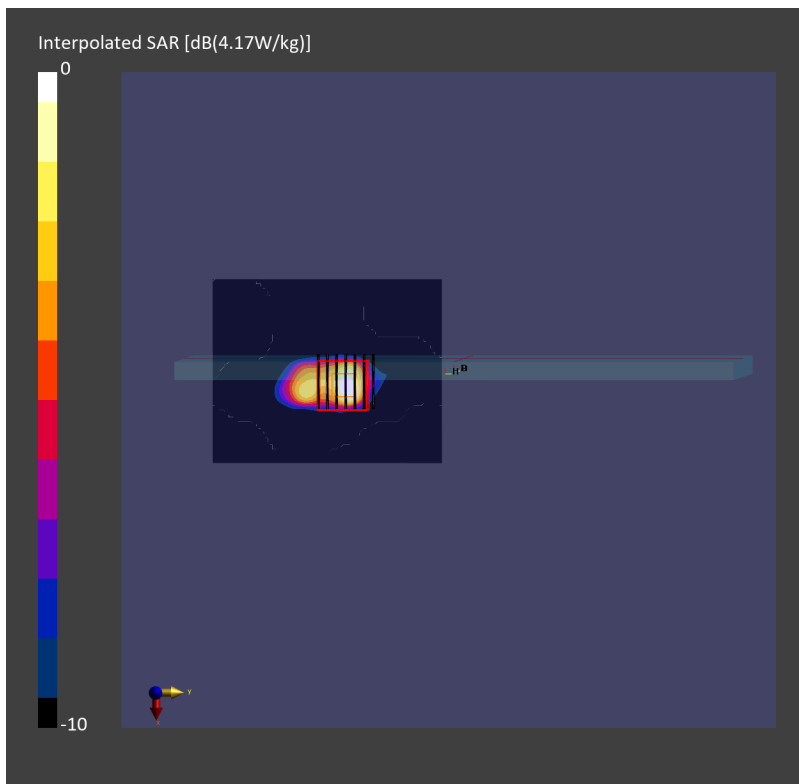

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch106;Main Ant


Communication System: 802.11ac; Frequency: 5530.0 MHz; Duty Cycle: 1:1.013
Medium: HSL_5G_230324 Medium parameters used: $f= 5530.0$ MHz; $\sigma= 5.09$ S/m; $\epsilon_r = 35.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(4.66, 4.66, 4.66); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10544-AAC

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.635 W/kg; SAR (10g) = 0.213 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 0.939 W/kg; SAR (8g) = 0.267 W/kg; SAR (10g) = 0.223 W/kg

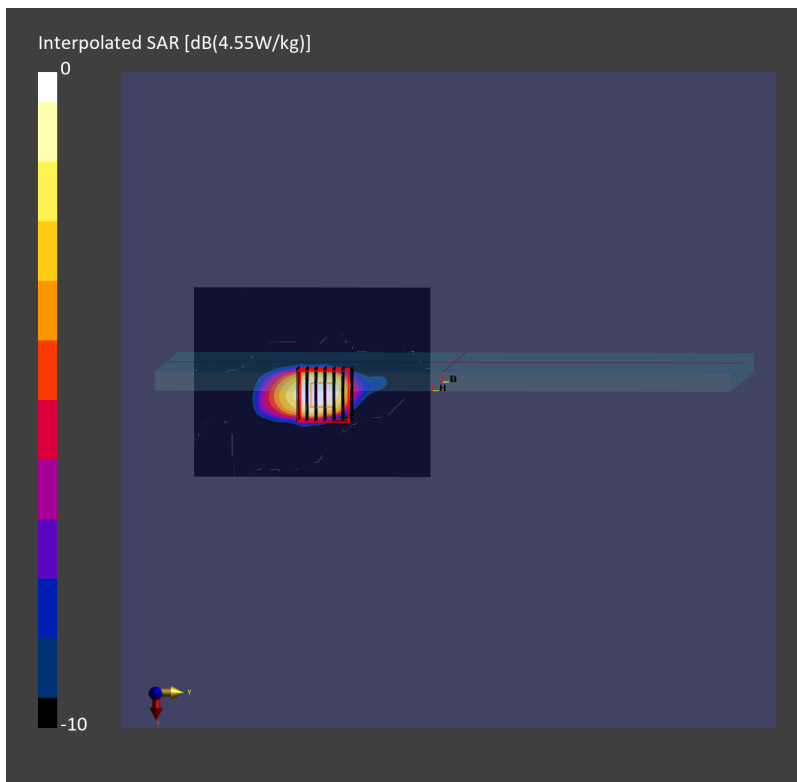

#05_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch155;Main Ant


Communication System: 802.11ac; Frequency: 5775.0 MHz; Duty Cycle: 1:1.013
Medium: HSL_5G_230324 Medium parameters used: $f= 5775.0$ MHz; $\sigma= 5.38$ S/m; $\epsilon_r = 35.2$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(4.96, 4.96, 4.96); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10544-AAC

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.551 W/kg; SAR (10g) = 0.180 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm
Power Drift = 0.10 dB
SAR (1g) = 0.695 W/kg; SAR (8g) = 0.200 W/kg; SAR (10g) = 0.169 W/kg

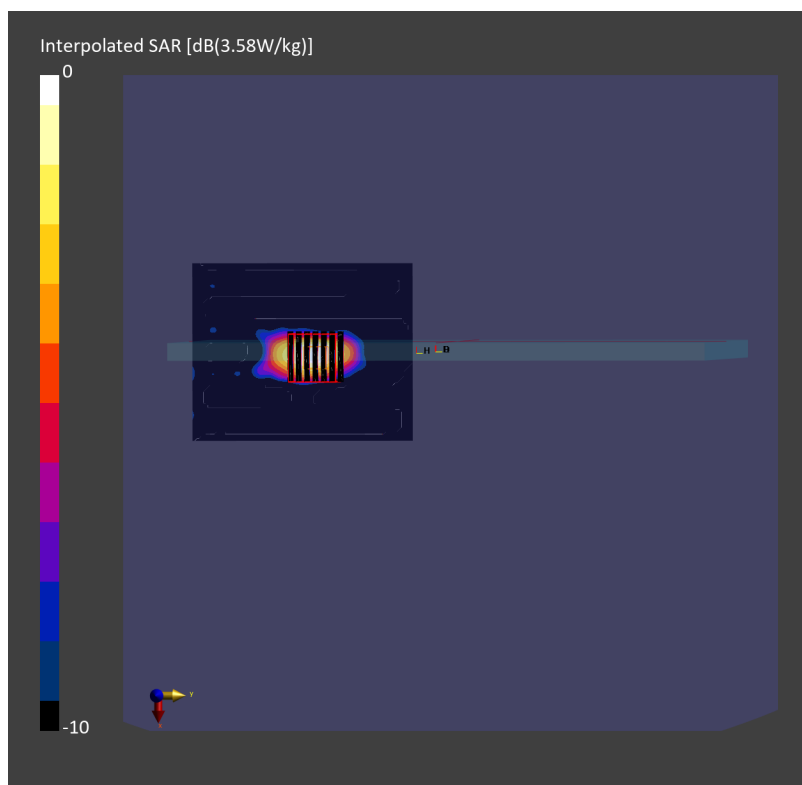

#06_Bluetooth_1Mbps_Bottom Face_0mm_Ch39;Aux Ant

Communication System: Bluetooth; Frequency: 2441.0 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_230323 Medium parameters used: $f=2441.0$ MHz; $\sigma=1.83$ S/m; $\epsilon_r=39.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.54, 7.54, 7.54); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.254 W/kg; SAR (10g) = 0.118 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.270 W/kg; SAR (8g) = 0.131 W/kg; SAR (10g) = 0.117 W/kg

