



7.6.4 MIMO Radiated Band Edge Measurements (80MHz BW)

Worst Case Mode: 802.11ac Worst Case Transfer Rate: MCS₀ Distance of Measurements: 3 Meters Operating Frequency: 5210MHz Channel: 42

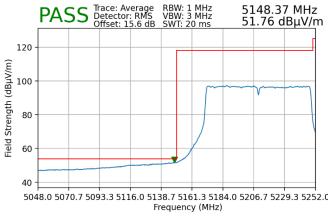


Plot 7-209. Radiated Lower Band Edge Plot MIMO (Average - UNII Band 1)

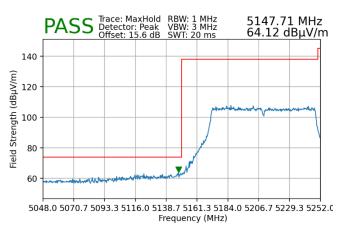


Plot 7-210. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 1)

Worst Case Mode: 802.11ax Worst Case Transfer Rate: MCS0 Distance of Measurements: 3 Meters Operating Frequency: 5290MHz Channel: 58

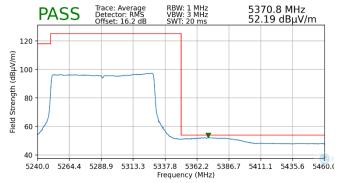

Plot 7-211. Radiated Upper Band Edge Plot MIMO (Average - UNII Band 2A)

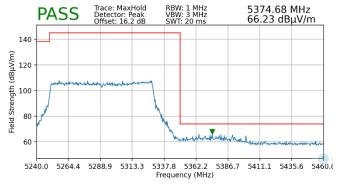


Plot 7-212. Radiated Upper Band Edge Plot MIMO (Peak - UNII Band 2A)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 145 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 140 01 100




Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ac	
MCS0	
3 Meters	
5530MHz	
106	

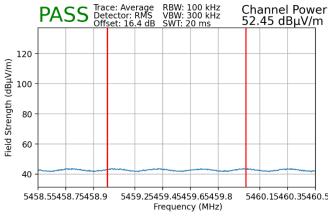

Plot 7-213. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

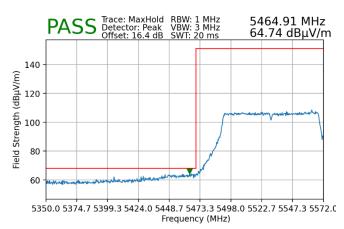

Plot 7-214. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax

MCS0

3 Meters

5775MHz

155

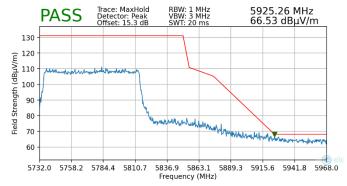


Plot 7-215. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 146 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 140 01 130



Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ax
MCS0
3 Meters
5855MHz
171

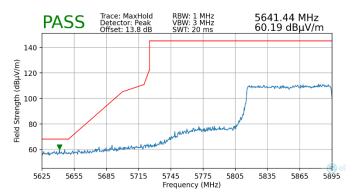

Plot 7-216. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 4)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax

MCS0


3 Meters

5855MHz

171

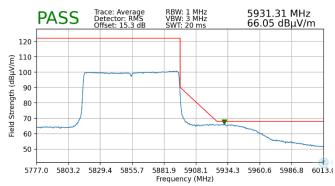

Plot 7-217. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 4)

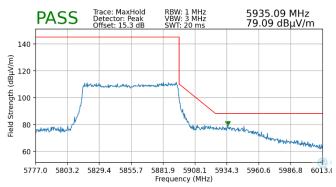


Plot 7-218. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 4)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 147 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 147 01 130



7.6.5 MIMO Radiated Band Edge Measurements (160MHz BW)

Worst Case Mode: 802.11ac Worst Case Transfer Rate: MCS0 Distance of Measurements: 3 Meters Operating Frequency: 5250MHz Channel: 50

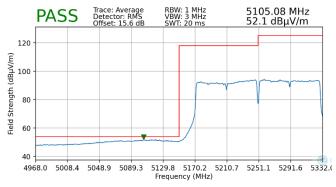


RBW: 1 MHz VBW: 3 MHz SWT: 20 Trace: MaxHold Detector: Peak Offset: 15.6 dB **PASS** 68.98 dBμV/m (dBµV/m) 120 Field Strength 100 80 60 5129.8 5170.2 5210.7 5251.1 5291.6 5332.0 Frequency (MHz)


5147.08 MHz

Plot 7-219. Radiated Lower Band Edge Plot MIMO (Average - UNII Band 1)

Plot 7-220. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 1)

Worst Case Mode: 802.11ac Worst Case Transfer Rate: MCS0 Distance of Measurements: 3 Meters Operating Frequency: 5250MHz Channel: 50

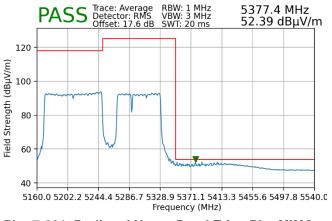

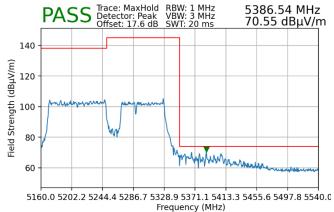

Plot 7-221. Radiated Upper Band Edge Plot MIMO (Average - UNII Band 2A)


Plot 7-222. Radiated Upper Band Edge Plot MIMO (Peak - UNII Band 2A)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 148 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 ago 140 01 100




Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11be	
MCS0	
3 Meters	
5570MHz	
114	

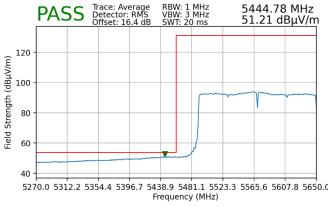


Plot 7-223. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

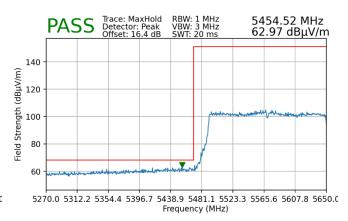

Plot 7-224. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ac
MCS0
3 Meters
5815MHz
163

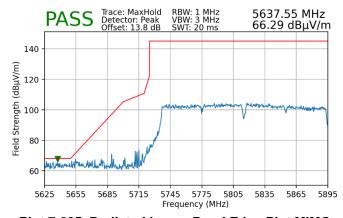


Plot 7-225. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 4)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 149 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 149 01 130




Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ac
MCS0
3 Meters
5815MHz
163

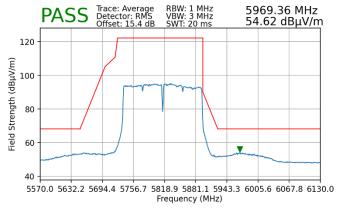

Plot 7-226. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 4)

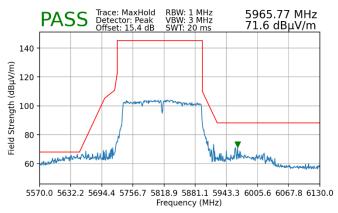

Plot 7-227. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 4)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 150 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 130 01 130

© 2024 ELEMENT



7.7 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per FCC §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	n Conducted Limit (dBμV)	
(IVITIZ)	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-40. Conducted Limits

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- 2. RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Average Field Strength Measurements

- Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = RMS
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 151 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	rage 131 or 130

^{*}Decreases with the logarithm of the frequency.



Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

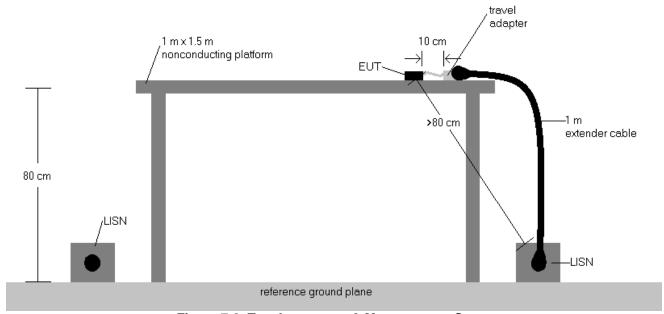



Figure 7-8. Test Instrument & Measurement Setup

Test Notes


- 1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
- 2. The limit for an intentional radiator from 150kHz to 30MHz is specified in §15.207 and RSS-Gen (8.8).
- 3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- 4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
- 5. Margin (dB) = QP/AV Limit (dB μ V) QP/AV Level (dB μ V)
- 6. Traces shown in plot are made using a peak detector.
- 7. Deviations to the Specifications: None.

FCC ID: C	C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Repo	ort S/N:	Test Dates:	EUT Type:	Page 152 of 158
1M231219	90129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 132 01 130



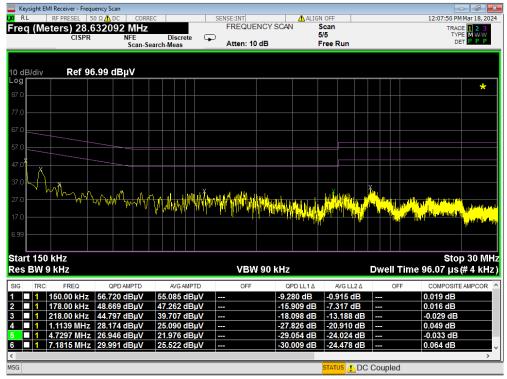


Plot 7-228. Line Conducted Plot with 802.11a UNII Band 1 (L1)

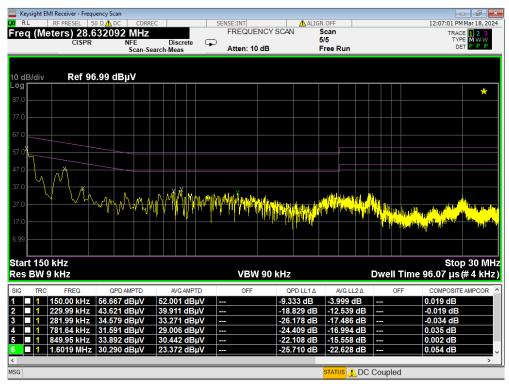


Plot 7-229. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 153 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 133 01 130



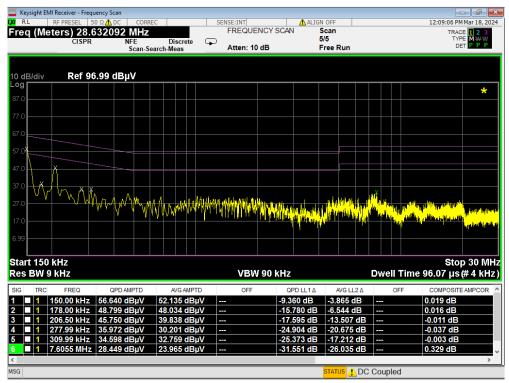


Plot 7-230. Line Conducted Plot with 802.11a UNII Band 2A (L1)

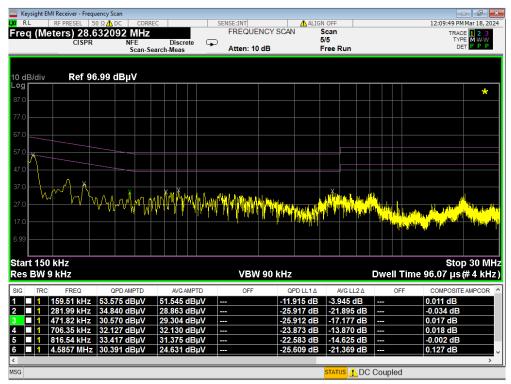


Plot 7-231. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 154 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 134 01 130



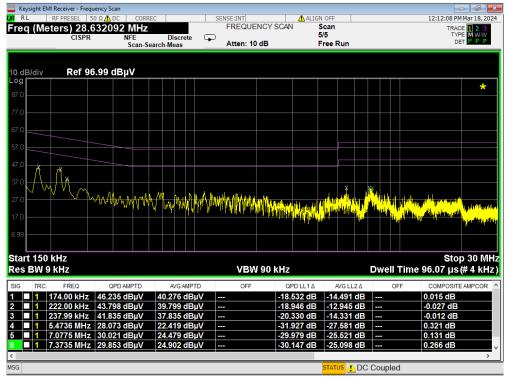


Plot 7-232. Line Conducted Plot with 802.11a UNII Band 2C (L1)

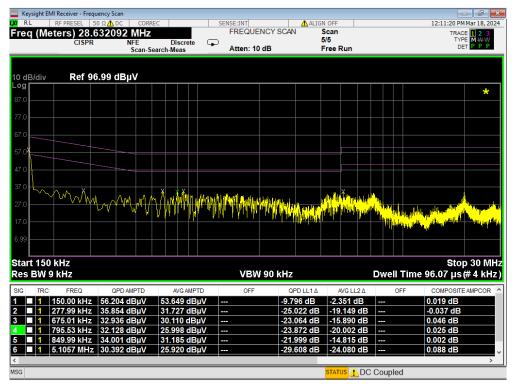


Plot 7-233. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 155 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 133 01 130



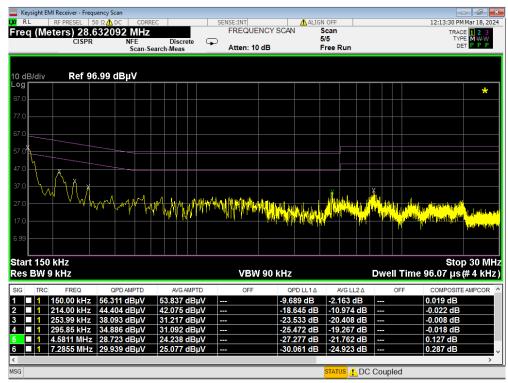


Plot 7-234. Line Conducted Plot with 802.11a UNII Band 3 (L1)

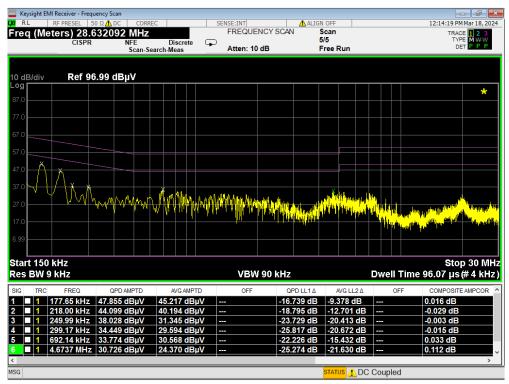


Plot 7-235. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 156 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 130 01 130



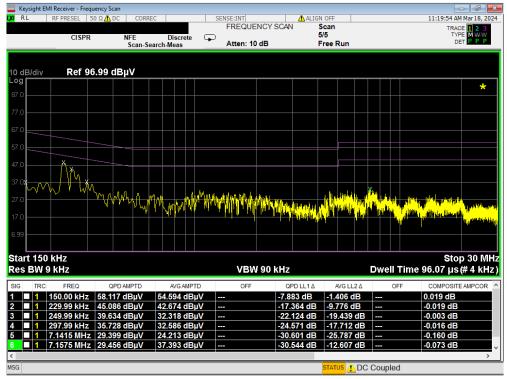

Plot 7-236. Line Conducted Plot with 802.11a UNII Band 4 (L1)

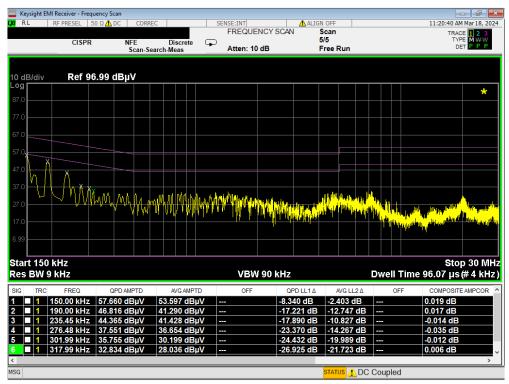

Plot 7-237. Line Conducted Plot with 802.11a UNII Band 4 (N)

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 157 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 137 of 130

V11.1 08/28/2023



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Microsoft Corporation Portable Computing Device FCC ID: C3K2076** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: C3K2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 158 of 158
1M2312190129-09.C3K	01/03/2024 - 03/18/2024	Portable Computing Device	1 age 130 of 130