



Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

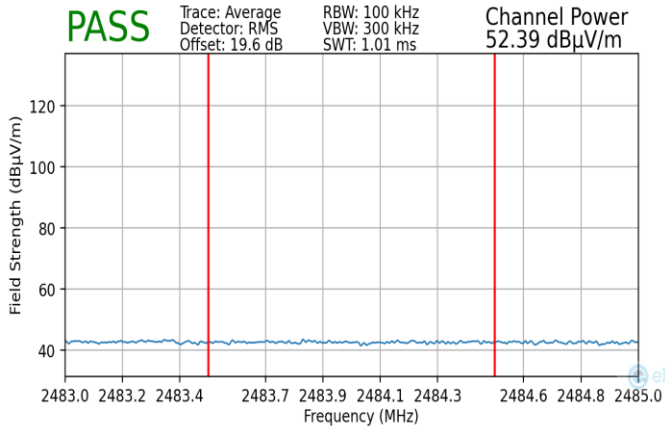


Plot 7-218. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

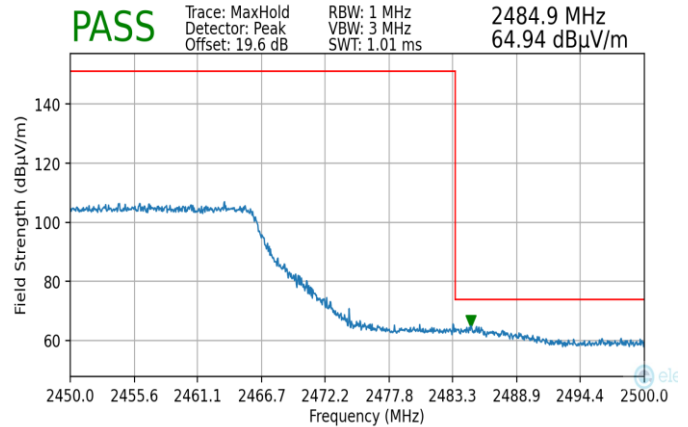


Plot 7-219. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

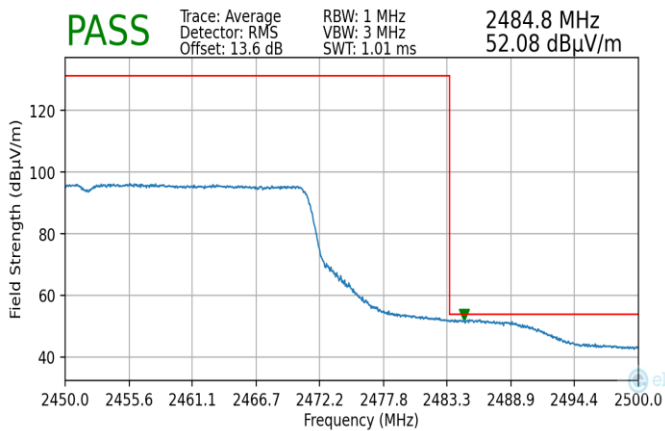

Plot 7-220. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

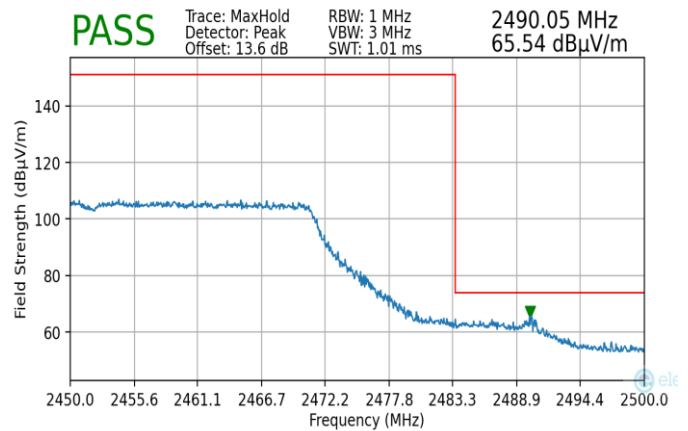


Plot 7-221. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)


FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312190129-07.C3K	Test Dates: 01/03/2024 - 03/18/2024	EUT Type: Portable Computing Device	Page 141 of 146



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

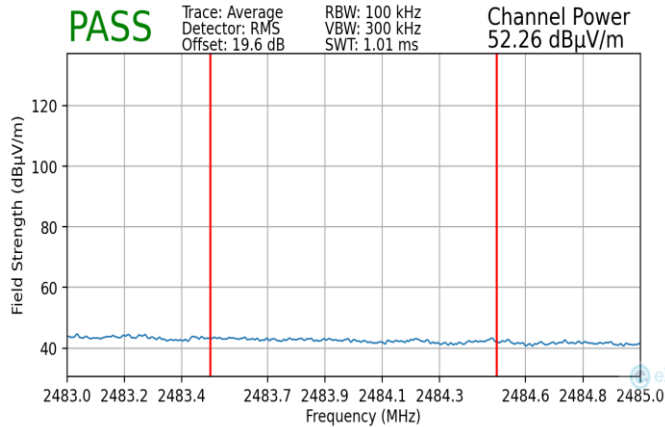


Plot 7-222. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

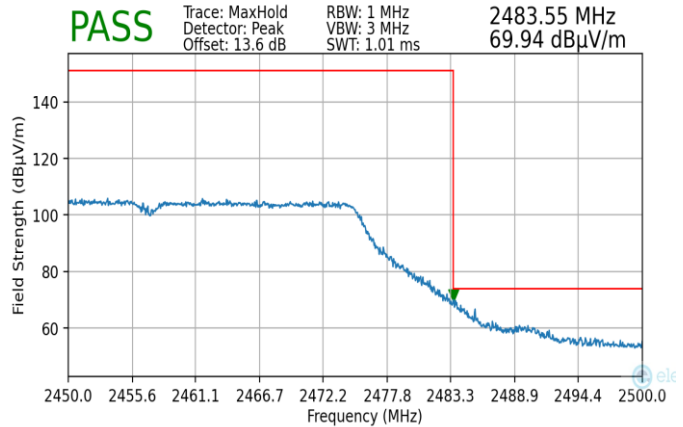


Plot 7-223. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

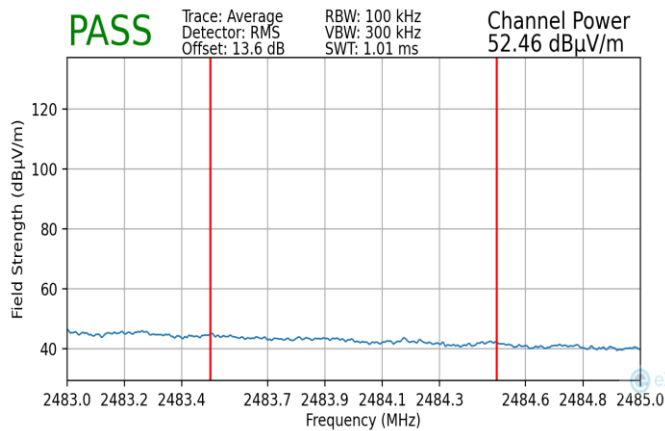

Plot 7-224. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

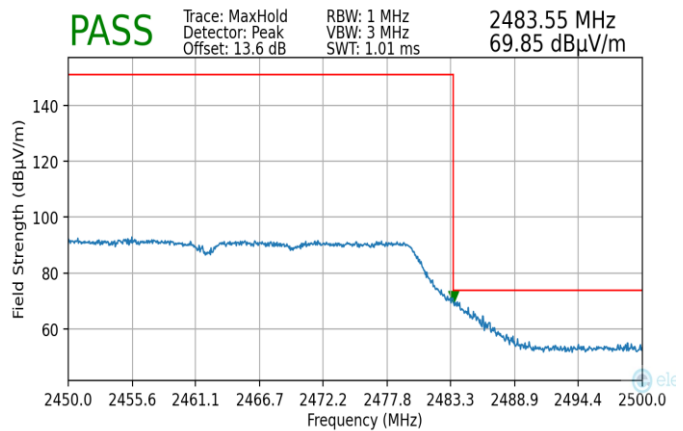

Plot 7-225. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312190129-07.C3K	Test Dates: 01/03/2024 - 03/18/2024	EUT Type: Portable Computing Device	Page 142 of 146

7.8 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312190129-07.C3K	Test Dates: 01/03/2024 - 03/18/2024	EUT Type: Portable Computing Device	Page 143 of 146

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


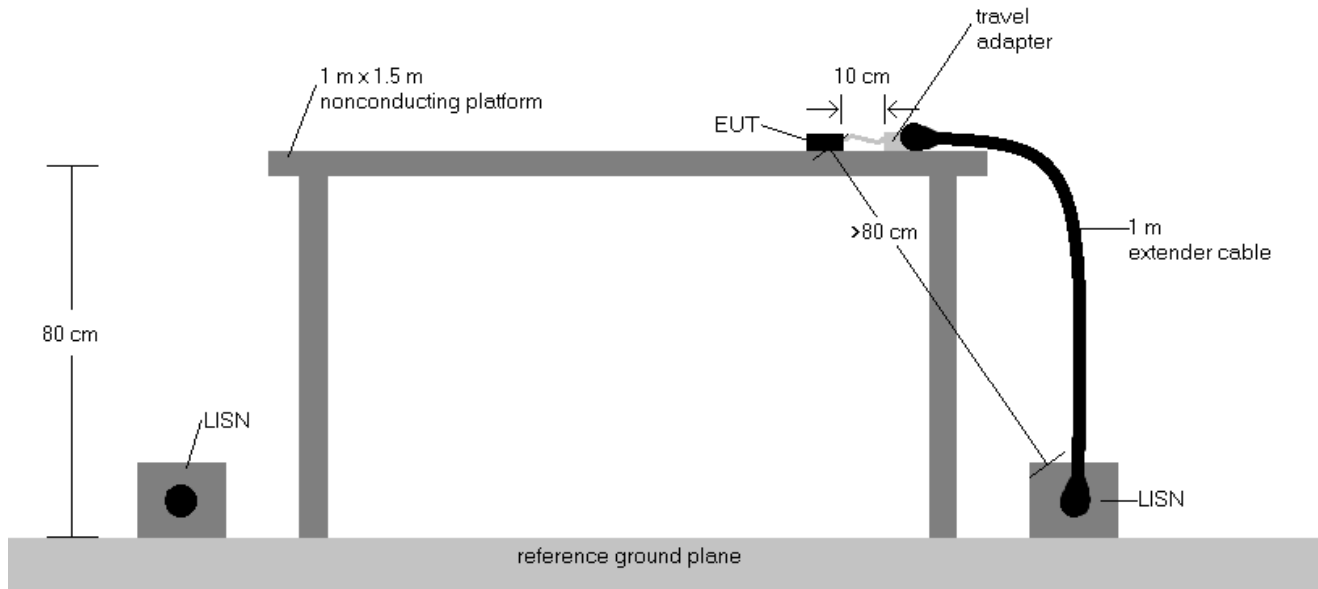


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

- All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
- The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP\AV Level (dB μ V) = QP\AV Analyzer\Receiver Level (dB μ V) + Corr. (dB)
- Margin (dB) = QP\AV Limit (dB μ V) - QP\AV Level (dB μ V)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312190129-07.C3K	Test Dates: 01/03/2024 - 03/18/2024	EUT Type: Portable Computing Device	Page 144 of 146

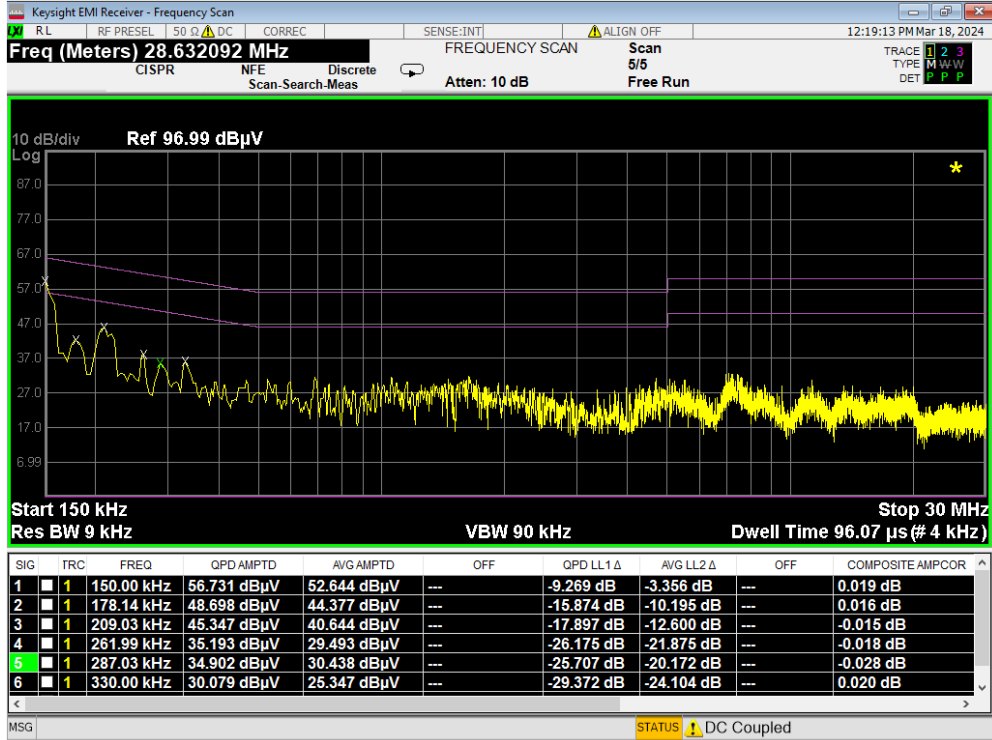

Plot 7-226. Line Conducted Plot with 802.11b (L1)

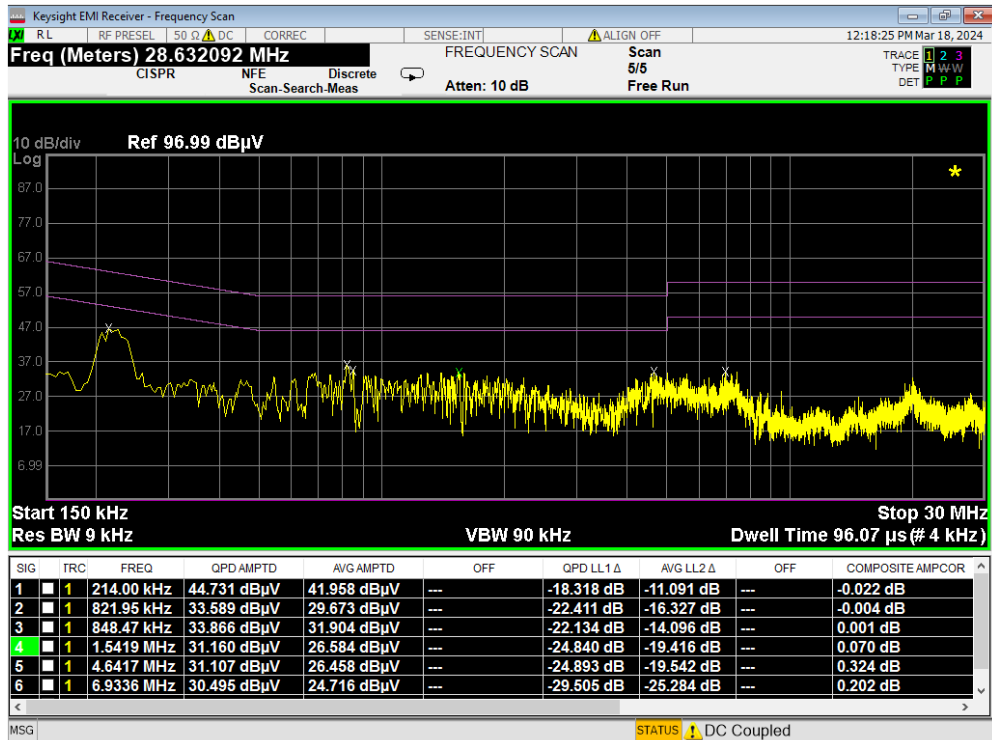

Plot 7-227. Line Conducted Plot with 802.11b (N)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312190129-07.C3K	Test Dates: 01/03/2024 - 03/18/2024	EUT Type: Portable Computing Device	Page 145 of 146

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Microsoft Corporation Portable Computing Device FCC ID: C3K2076 / IC: 3048A-2076** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and with RSS-247 of the Innovation, Science and Economic Development Canada rules.

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312190129-07.C3K	Test Dates: 01/03/2024 - 03/18/2024	EUT Type: Portable Computing Device	Page 146 of 146