

#01_NFC_Edge 1_0mm

Communication System: NFC; Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL_13_231116 Medium parameters used (interpolated): $f = 13.56 \text{ MHz}$; $\sigma = 0.728 \text{ S/m}$; $\epsilon_r =$

54.443 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(18.04, 18.04, 18.04) @ 13.56 MHz; Calibrated: 2023/5/22

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1424; Calibrated: 2023/1/9

- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx;


- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Ch/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 0 V/m ; Power Drift = 0 dB

Fast SAR: SAR(1 g) = 0 W/kg ; SAR(10 g) = 0 W/kg

Maximum value of SAR (interpolated) = 0 W/kg

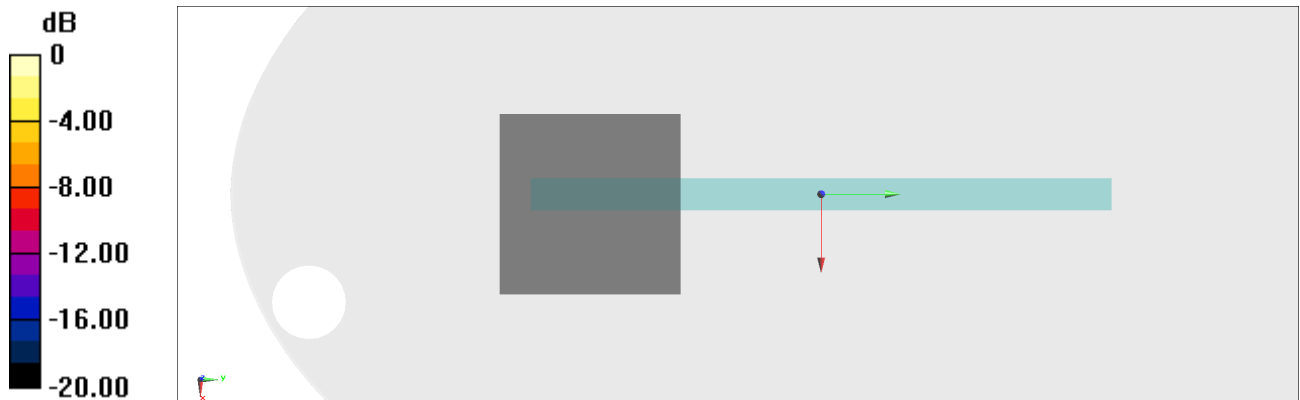

$0 \text{ dB} = 0 \text{ W/kg} = -999.00 \text{ dBW/kg}$