



EMC COMPLIANCE ENGINEERING AND TESTING



APPLICATION FOR FCC CERTIFICATION

CLASS B TRANSMITTER DEVICE

Microsoft Corporation
1 Microsoft Way
Redmond, WA 98052
425-882-8080

MODEL: Microsoft Cordless Wheel Mouse

FCC ID: C3KMS6

Serial Number 4, Tracking Number 372-A

June 5, 1999

This report concerns (check one): Equipment Type: Transmitter	Original Grant: X	Class II Change:
Deferred grant requested per 47 CFR 0.457 (d) (1) (ii)? If yes, defer until: _____	Yes:	No: X _____ <i>Date</i>
Company name agrees to notify the Commission by: _____ (date) of the intended date of announcement of the product so that the grant can be issued on that date.		

REPORT PREPARED BY:

EMI Technician: Daniel W. Baltzell
Administrative Writer: Melissa Fleming

Rhein Tech Laboratories, Inc.

Document Number: 990283

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.

360 Herndon Parkway, Suite 1400
Herndon, VA 20170
703 689-0368 FAX 703 689-2056

TABLE OF CONTENTS

1.0	GENERAL INFORMATION.....	4
1.1	RELATED SUBMITTAL(S)/GRANT(S)/DOC(S).....	4
1.2	PRODUCT DESCRIPTION (CONFIDENTIAL).....	5
1.3	TEST SYSTEM DETAILS.....	7
1.4	CONFIGURATION OF TESTED SYSTEM (PS2 AND SERIAL PORT).....	8
1.5	TEST METHODOLOGY	9
1.6	TEST FACILITY.....	9
2.0	PRODUCT LABELING	10
3.0	SYSTEM TEST CONFIGURATION	11
3.1	JUSTIFICATION	11
3.2	EUT EXERCISE SOFTWARE.....	11
3.3	SPECIAL ACCESSORIES	12
3.4	MODULATED BANDWIDTH.....	12
3.5	CONFORMANCE STATEMENT.....	13
4.0	MEASUREMENT PHOTOS.....	19
4.1	RADIATED MEASUREMENT PHOTOS (WITH PS2)	19
4.2	RADIATED MEASUREMENT PHOTOS (SERIAL PORT CONFIGURATION)	20
5.0	RADIATED EMISSION DATA.....	21
5.1	FIELD STRENGTH CALCULATION.....	26
6.0	PHOTOS OF EUT.....	27
7.0	PHOTOS OF SUPPORT EQUIPMENT FOR THE EUT.....	33

APPENDIX LISTING

APPENDIX A:	SCHEMATICS OF MICROSOFT CORDLESS WHEEL MOUSE (CONFIDENTIAL)	14
APPENDIX B:	BLOCK DIAGRAM OF MICROSOFT CORDLESS WHEEL MOUSE (CONFIDENTIAL).....	17
APPENDIX C:	EMISSIONS EQUIPMENT LIST	41
APPENDIX D:	CONDUCTED AND RADIATED TEST METHODOLOGY.....	42
APPENDIX E:	RECEIVER DoC LABEL	43
APPENDIX E:	PLOTS	44
APPENDIX F:	USER'S MANUAL.....	47

FIGURE INDEX

FIGURE 1:	FCC LABEL STATEMENT IN MICROSOFT MANUAL ON PAGE 3.....	10
FIGURE 2:	LOCATION AND LABEL SAMPLE ON EUT.....	10
FIGURE 3:	TOP OF MOUSE.....	27
FIGURE 4:	BOTTOM OF MOUSE.....	27
FIGURE 5:	MOUSE PCB COMPONENT SIDE.....	28
FIGURE 6:	MOUSE PCB SOLDER SIDE.....	28
FIGURE 7:	MOUSE END.....	29
FIGURE 8:	MOUSE INSIDE BATTERY COVER AND SCREW.....	29
FIGURE 9:	MOUSE INSIDE TOP BEVEL.....	30
FIGURE 10:	MOUSE INSIDE TOP.....	30
FIGURE 11:	MOUSE OUTSIDE BATTERY COVER AND SCREW.....	31
FIGURE 12:	MOUSE SIDE.....	31
FIGURE 13:	MOUSE TOP.....	32
FIGURE 14:	PS2-SERIAL ADAPTER BOTTOM.....	33
FIGURE 15:	PS2-SERIAL ADAPTER PS2 PLUG.....	33
FIGURE 16:	PS2-SERIAL ADAPTER SERIAL PLUG.....	34
FIGURE 17:	PS2-SERIAL ADAPTER TOP.....	34
FIGURE 18:	RECEIVER BOTTOM PCB.....	35
FIGURE 19:	RECEIVER BOTTOM.....	35
FIGURE 20:	RECEIVER ANTENNA AND INSIDE FRONT END.....	36
FIGURE 21:	RECEIVER ANTENNA AND INSIDE REAR END.....	36
FIGURE 22:	RECEIVER ANTENNA AND INSIDE SIDE.....	37
FIGURE 23:	RECEIVER INSIDE TOP BEVEL.....	37
FIGURE 24:	RECEIVER INSIDE TOP.....	38
FIGURE 25:	RECEIVER PCB COMPONENT SIDE.....	38
FIGURE 26:	RECEIVER TOP.....	39
FIGURE 27:	RECEIVER BOTTOM.....	39
FIGURE 28:	RECEIVER TOP.....	40
FIGURE 29:	MACH99#4 CHANNEL 2 AT 27.142M PS2 PLOT.....	45
FIGURE 30:	MACH99#4 CHANNEL 1 AT 27.042M PS2 PLOT.....	46

TABLE INDEX

TABLE 1:	TEST SYSTEM DETAILS.....	7
TABLE 2:	RADIATED EMISSIONS CHANNEL 1 - PS2 PORT CONFIGURATION.....	21
TABLE 3:	RADIATED EMISSIONS CHANNEL 2 - PS2 PORT CONFIGURATION.....	23
TABLE 4:	RADIATED EMISSIONS CHANNEL 1 - SERIAL PORT CONFIGURATION.....	24
TABLE 5:	RADIATED EMISSIONS CHANNEL 2 - SERIAL PORT CONFIGURATION.....	25

1.0 GENERAL INFORMATION

The following Application for FCC Certification of a Class B transmitter is prepared on behalf of Microsoft Corporation in accordance with Part 2, and Part 15, Subparts A and C of the Federal Communications Commissions rules and regulations. The Equipment Under Test (EUT) was the Microsoft Cordless Wheel Mouse, FCC ID:C3KMS6 Serial Number 4, Tracking Number 372-A. The test results reported in this document relate only to the item that was tested. The item consists of a wireless mouse and a wireless receiver hub with two types of interface PS2 and RS 232.

All measurements contained in this application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conform with the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instruments. These are explained in the appendix of this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

All radiated and conducted emission measurements were performed manually at Rhein Tech Laboratories, Inc. The radiated emission measurements required by the rules were performed on the 3/10 meter open field test ranges maintained by Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. Complete description and site attenuation measurement data have been placed on file with the Federal Communications Commission. The power line conducted emission measurements were performed in a shielded enclosure also located at the Herndon, Virginia facility. The FCC accepts Rhein Tech Laboratories as a facility available to do measurement work for others on a contract basis.

1.1 RELATED SUBMITTAL(S)/GRANT(S)/DOC(S)

This is an original submission for Certification. A class B DOC report is on file for the Cordless Wheel Receiver as a digital interface device. A copy of the cordless wheel receiver class B DoC label is included in the report. The device operating frequency as a receiver falls below 30 MHz, therefore it is exempted from FCC technical requirement (15.101 b) but must adhere to the General Conditions of Operations section 15.5 of the FCC rules and regulations.

1.3 TEST SYSTEM DETAILS

Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test.

TABLE 1: TEST SYSTEM DETAILS


External Components

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
ADAPTER	MICROSOFT CORPORATION	PS-2/SERIAL	PART #X03-55560	N/A	N/A	010670
MOUSE	MICROSOFT CORPORATION	CORDLESS WHEEL RECEIVER	4, 372-A	DoC	SHIELDED I/O	010668
TERMINATION	GATEWAY 2000, INC.	USB HIGH/LOW SPEED	N/A	N/A	SHIELDED I/O	010364
MODEM	US ROBOTICS	0413	839032B86P9WB	DoC	SHIELDED I/O UNSHIELDED POWER	900409
MOUSE (EUT)	MICROSOFT CORPORATION	CORDLESS WHEEL MOUSE	4, 372-A	C3KMS6	N/A	010669
KEYBOARD	MICROSOFT	NKE (NATURAL ELITE)	E06402PS2	DoC	SHIELDED I/O	009524
PRINTER	HEWLETT PACKARD	2225C	2804S03388	DSI6XU2225	SHIELDED I/O UNSHIELDED POWER	900135
MONITOR	MAG TECHNOLOGIES INC.	E5005 (EV500)	SAM588000020	DoC	SHIELDED I/O, FERRITE BOTH ENDS SHIELDED POWER	009752
SYSTEM	GATEWAY 2000, INC.	BATC	N/A	DoC	SHIELDED I/O SHIELDED POWER	010008

Internal Components

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
CPU	INTEL	PENTIUM 166 MHZ	FV80502166	N/A	N/A	900511
MOTHERBOARD	INTEL	HITMAN	AA-666761-204	N/A	INTERNAL I/O INTERNAL POWER	900533
VIDEO CARD	STB	VIRGE GX	210-0262-001-A0	N/A	SHIELDED I/O	007043
POWER SUPPLY	ASTEC	ATX147-3515	2418040920	N/A	SHIELDED POWER	007517
HARD DRIVE	QUANTUM	FIREBALL ST	162OAT ST16A2F1	N/A	INTERNAL I/O INTERNAL POWER	900582
FLOPPY DRIVE	PANASONIC	JU256A216P	00571657	N/A	INTERNAL I/O INTERNAL POWER	900530

1.4 CONFIGURATION OF TESTED SYSTEM (PS2 AND SERIAL PORT)

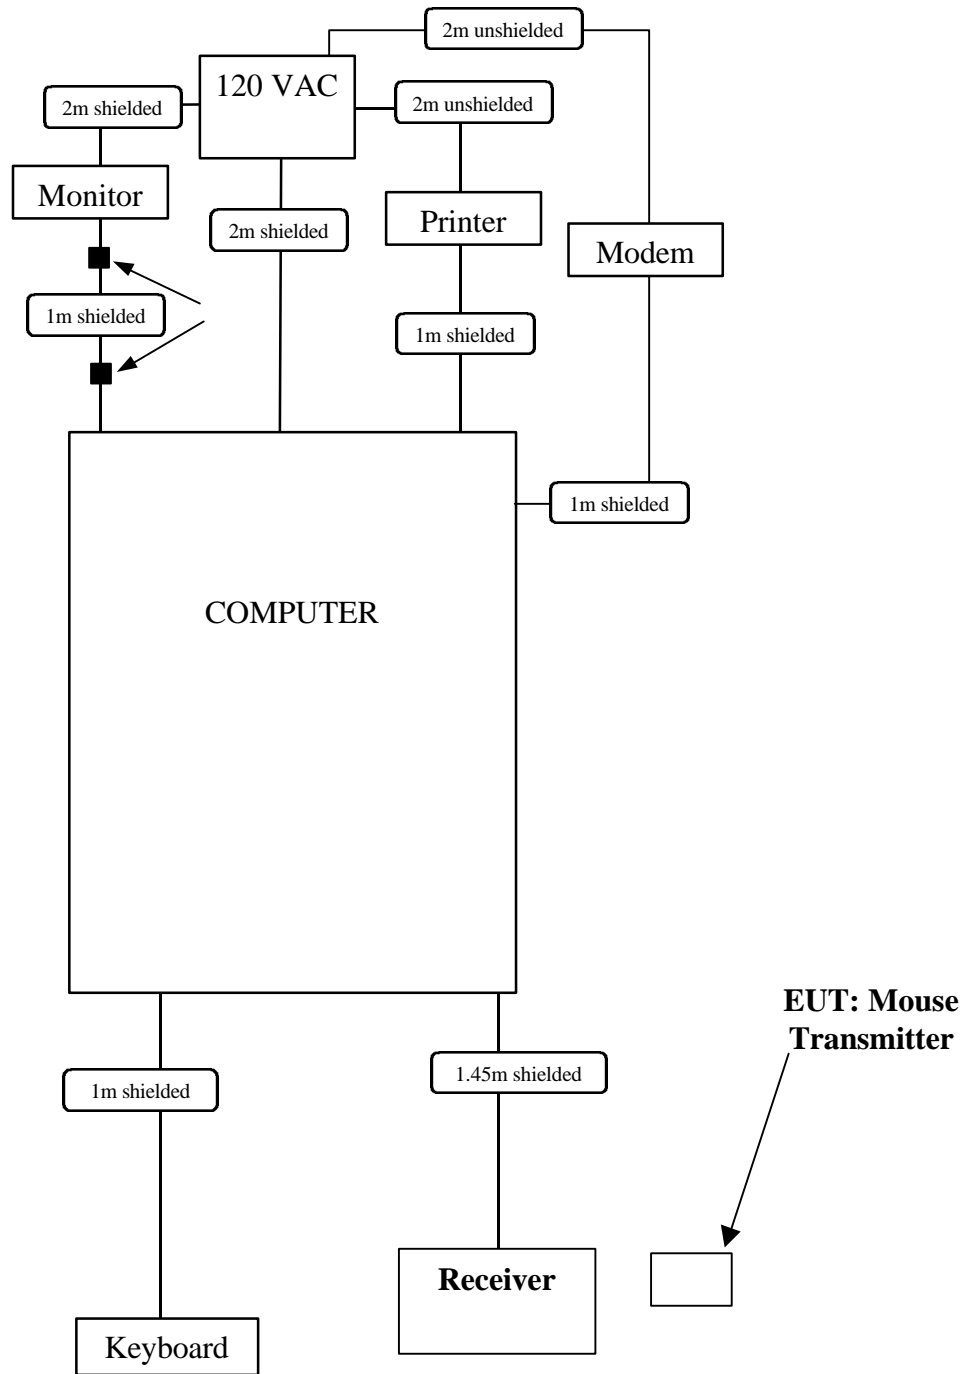

1.5 TEST METHODOLOGY

Radiated testing were performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of one and three meters. The one meter test distance was used when there were strong ambient signals or extremely low spurious emissions that inhibited measuring at three meters per FCC 15.31 *f* (2). **The EUT was tested from 9 KHz to the 10th harmonic of channel 1 at 27.045 MHz and channel 2 at 27.145 MHz as well as up to 1000 MHz since the EUT contains a 4 MHz microcontroller.** Section 3.1 contains other clocks and oscillators measured. FCC 15.227 average limit was used to determine the transmitter carrier amplitude. FCC 15.31 *f* (2) the square of an inverse linear distance extrapolation factor was used to extrapolate the new limit whenever an EUT to antenna distance other than the given FCC test distance for frequencies below 30 MHz per FCC 15.209 general radiation emission limit. Conducted emission testing was not performed on the host computer power line since the EUT does not have a power supply. The EUT's DC power is provided by the PS2 port and the serial port.

1.6 TEST FACILITY

The open area test sites and conducted measurement facility used to collect the radiated data is located on the rear lot of Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400 in Herndon, Virginia. Our open area test sites 1 and 2 are approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

3.0 SYSTEM TEST CONFIGURATION

3.1 JUSTIFICATION

The EUT does not have a power supply for AC power; the conducted emissions measurement was performed on the computer's AC power line. The EUT was also tested in two orthogonal planes, namely vertical and horizontal. The following local oscillators, crystals and IF were investigated and measured:

- 1 Transmitter channel 1 = 27.045 MHz,
- 2 Transmitter channel 2 = 27.145 MHz,
- 3 Transmitter channel 1 LO = 9.045 MHz,
- 4 Transmitter channel 2 LO = 9.145 MHz
- 5 Transmitter microcontroller oscillator = 4 MHz
- 6 Receiver channel 1 = 26.59 MHz
- 7 Receiver channel 2 = 26.69 MHz
- 8 Receiver microcontroller 7.3728 MHz
- 9 Receiver IF = 455 KHz
- 10 PS2 mode
- 11 Serial mode

3.2 EUT EXERCISE SOFTWARE

The EUT was installed as a PS2 and serial peripheral device using Microsoft Windows device drivers. The EUT's firmware was modified so that the carrier was always on. An exercise program was also used to exercise other peripherals of the system configuration during radiated and conducted testing in a manner similar to typical use. The software, contained on the hard disk drive, sequentially exercises each system component as follows:

- 1) An H prints on the monitor
- 2) An H prints on the printer
- 3) An H is sent to the serial ports
- 4) A file is read from the floppy diskette
- 5) A file is read from the hard drive and any other hard drive present
- 6) A file is read from the CD-ROM drive.

Additionally, a looped batch program was initiated to render a continuous flow of data through the USB ports. No data from the keyboard was transmitted to the PC during testing as it is strictly an input device. However, it was continuously scanned for data input activity.

Worst case emissions are recorded in the data tables for channel 1 and channel 2 configured as a PS2 interface, and channel 1 and channel 2 configured as a serial interface.

3.3 SPECIAL ACCESSORIES

The interface cable on the EUT is 4 feet long and made out of foil shielded cable with a PS2 connector. The drain wire terminates on the PS2 connector. The following information is from the cable: Manufacturer: Pong-DA, Jacket Material: 94V1, Length: 1450 +/- 25 mm, Spiral Shield: default connection PS/2, Termination: pigtail termination at PS/2 end of cordless wheel mouse receiver cable with shield wire soldered to one spot on the PS/2 connector shell. Adaptor: converts PS/2 into serial Manufacturer: Microsoft, Part Number: X05560.

3.4 OCCUPIED BANDWIDTH AND SPURIOUS NOISE

The EUT was set up as per section 1.4 and the transmitter carrier at channel 1 and channel 2 were measured per ANSI 63.4 occupied bandwidth measurement. The resolution and video bandwidth was set at 3 KHz and 10 KHz respectively. The sweeptime was set so that the receiver filters were properly charged. The carrier was on all the time. See the occupied bandwidth plots.

3.5 CERTIFICATION STATEMENT

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made during testing to the equipment in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.


Signature:

Date: June 5, 1999



Typed/Printed Name: Desmond A. Fraser

Position: President
(NVLAP Signatory)

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

5.0 RADIATED EMISSION DATA

The following data lists the worst case emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, plus the limit. Explanation of the Correction Factor is given in paragraph 6.1.

TABLE 2: RADIATED EMISSIONS; CHANNEL 1 - PS2 PORT CONFIGURATION


Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Test Distance (m)
9.013	Qp	V	265	1.6	42.5	-2.8	39.7	88.6	-48.9	1
26.589	Qp	V	5	1.8	51.0	-1.3	49.7	88.6	-38.8	1
26.589	Qp	V	80	1.0	28.9	-1.9	27.9	69.5	-41.6	3
27.0425	Av	V	270	2.0	54.7	-1.2	53.5	89.5	-36.0	1
27.0425	Av	V	355	1.0	48.8	-1.2	47.6	80.0	-32.4	3
54.078	Qp	H	285	1.0	32.9	-21.5	11.4	49.5	-38.1	1
54.078	Qp	H	90.0	3.5	32.8	-21.5	11.3	40.0	-28.7	3
81.117	Qp	H	270	1.8	41.6	-21.5	20.1	49.5	-29.4	1
81.117	Qp	H	240	2.2	35.0	-21.5	13.5	40.0	-26.5	3
108.156	Qp	H	290	1.2	36.9	-16.7	20.2	53.1	-32.9	1
108.156	Qp	H	300	2.0	26.2	-16.7	9.5	43.5	-34.0	3
135.196	Qp	H	290	1.0	36.0	-16.5	19.5	53.1	-33.6	1
135.196	Qp	H	310	2.0	24.3	-16.5	7.8	43.5	-35.7	3
162.235	Qp	H	290	1.0	39.0	-17.7	21.3	53.1	-31.8	1
162.235	Qp	H	300	1.8	27.6	-17.7	9.9	43.5	-33.6	3
189.274	Qp	H	290	1.0	39.6	-18.5	21.1	53.1	-32.0	1
189.274	Qp	H	300	2.0	27.3	-18.5	8.8	43.5	-34.0	3
216.313	Qp	H	275	1.0	33.6	-17.7	15.9	55.6	-39.7	1
216.313	Qp	H	275	1.4	24.7	-17.7	7.0	46.0	-39.0	3
243.352	Qp	H	290	1.0	28.4	-15.6	12.8	55.6	-42.8	1
243.352	Qp	H	290	1.0	20.4	-15.6	4.8	46.0	-42.2	3
270.392	Qp	H	290	1.0	23.7	-13.9	9.8	55.6	-45.8	1
270.392	Qp	H	280	4.0	20.5	-13.9	6.6	46.0	-39.4	3
297.431	Qp	H	280	1.4	24.4	-13.6	10.8	55.6	-44.8	1
324.470	Qp	H	275	1.4	27.5	-12.6	14.9	55.6	-40.7	1
351.509	Qp	H	270	1.4	27.4	-11.3	16.1	55.6	-39.5	1
378.548	Qp	H	275	1.0	39.9	-11.1	28.8	55.6	-26.8	1
378.548	Qp	H	80	1.0	27.6	-11.1	16.5	46.0	-29.5	3
946.371	Qp	H	290	1.0	27.2	-2.2	25	55.6	-30.6	1

See Appendix B for Radiated Test Methodology.

TEST PERSONNEL:

Signature:

Date: 6/5/99



Typed/Printed Name: Daniel W. Baltzell

TABLE 3: RADIATED EMISSIONS; CHANNEL 2 - PS2 PORT CONFIGURATION


Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Test Distance (m)
9.046	Qp	V	285	1.5	42.3	-2.8	39.5	88.6	-49.1	1
26.689	Qp	V	0	1.4	52.0	-1.3	50.7	88.6	-37.9	1
26.689	Qp	V	30	1.0	30.3	-1.3	29.0	69.5	-40.5	3
27.142	Av	V	275	2.0	56.5	-1.2	55.3	89.5	-34.2	1
27.142	Av	V	350	1.0	47.8	-1.2	46.6	80.0	-33.4	3
54.277	Qp	V	0	1.0	43.6	-21.6	22	49.5	-27.5	1
54.277	Qp	H	70.0	3.6	28.3	-21.5	6.8	40.0	-33.2	3
81.416	Qp	H	275	1.8	44.2	-21.4	22.8	49.5	-26.7	1
81.416	Qp	H	185	2.2	32.5	-21.4	11.1	40.0	-28.9	3
108.555	Qp	H	175	1.8	36.1	-16.6	19.5	53.1	-33.6	1
108.555	Qp	H	285	2.0	35.1	-16.6	8.5	43.5	-35.0	3
135.694	Qp	H	290	1.1	34.3	-16.5	17.8	53.1	-35.3	1
135.694	Qp	H	330	2.0	24.6	-16.5	8.1	43.5	-35.4	3
162.833	Qp	H	285	1.0	37.4	-17.7	19.7	53.1	-33.4	1
162.833	Qp	H	270	1.6	26.8	-17.7	9.1	43.5	-34.4	3
189.972	Qp	H	285	1.0	37.6	-18.5	19.1	53.1	-34	1
189.972	Qp	H	300	1.5	25.1	-18.5	6.6	43.5	-36.9	3
217.110	Qp	H	285	1.0	34.2	-17.7	16.5	55.6	-39.1	1
217.110	Qp	H	265	1.4	25.0	-17.7	7.3	46.0	-38.7	3
244.249	Qp	H	275	1.0	29.0	-15.5	13.5	55.6	-42.1	1
244.249	Qp	H	275	1.1	20.7	-15.5	5.2	46.0	-40.8	3
271.388	Qp	H	270	1.6	24.4	-14.0	10.4	55.6	-45.2	1
271.388	Qp	H	280	1.0	21.4	-14.0	7.4	46.0	-38.6	3
298.526	Qp	H	285	1.0	29.1	-13.5	15.6	55.6	-40	1
325.665	Qp	H	285	1.0	30.3	-12.6	17.7	55.6	-37.9	1
352.804	Qp	H	285	1.0	36.2	-11.3	24.9	55.6	-30.7	1
379.942	Qp	H	285	1.0	37.8	-11.0	26.8	55.6	-28.8	1

See Appendix B for Radiated Test Methodology.

TEST PERSONNEL:

Signature:

Date: 6/5/99



Typed/Printed Name: Daniel W. Baltzell

TABLE 4: RADIATED EMISSIONS; CHANNEL 1 - SERIAL PORT CONFIGURATION


Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Test Distance (m)
9.013	Qp	V	30	1	42.5	-2.8	39.7	88.6	-48.9	1
26.588	Qp	V	50	1.5	48.0	-1.3	46.7	88.6	-41.9	1
26.588	Qp	V	50	1.0	29.2	-1.3	27.9	69.5	-41.6	3
27.049	Av	V	205	2.0	56.8	-1.2	55.6	89.5	-32.9	1
27.049	Av	V	350	1.0	48.9	-1.2	47.7	80.0	-32.3	3
54.078	Qp	H	90	1.8	36.5	-21.5	15	49.5	-34.5	1
54.078	Qp	H	75	4.0	28.5	-21.5	7.0	40.0	-33.0	3
81.118	Qp	H	265	2.0	44.5	-21.5	23	49.5	-26.5	1
81.118	Qp	H	270	1.6	32.7	-21.5	11.2	40.0	-28.8	3
108.157	Qp	H	280	1.4	35.8	-16.7	19.1	53.1	-34	1
108.157	Qp	H	285	2.2	27.6	-16.7	10.9	43.5	-32.6	3
135.197	Qp	H	250	1.0	36.4	-16.5	19.9	53.1	-33.2	1
135.197	Qp	H	270	1.0	35.6	-16.5	9.1	43.5	-34.4	3
162.236	Qp	H	295	1.0	38.5	-17.7	20.8	53.1	-32.3	1
162.236	Qp	H	275	2.0	27.3	-17.7	9.6	43.5	-33.9	3
189.275	Qp	H	290	1.0	39.9	-18.5	21.4	53.1	-31.7	1
189.275	Qp	H	270	2.0	29.1	-18.5	10.6	43.5	-32.9	3
216.314	Qp	H	275	1.0	35.0	-17.7	17.3	55.6	-38.3	1
216.314	Qp	H	275	1.5	24.7	-17.7	7.0	46.0	-39.0	3
243.354	Qp	H	290	1.0	28.7	-15.6	13.1	55.6	-42.5	1
243.354	Qp	H	260	1.0	19.8	-15.6	4.2	46.0	-41.8	3
270.393	Qp	H	280	1.0	25.9	-13.9	12	55.6	-43.6	1
270.393	Qp	H	290	1.0	18.5	-13.9	4.6	46.0	-41.4	3
297.432	Qp	H	270	1.0	23.7	-13.6	10.1	55.6	-45.5	1
378.547	Qp	H	275	1.0	29.6	-11.1	18.5	46.0	-27.5	3
946.373	Qp	H	270	1.0	29.2	-2.2	27	55.6	-28.6	1

See Appendix B for Radiated Test Methodology.

TEST PERSONNEL:

Signature:

Date: 6/5/99



Typed/Printed Name: Daniel W. Baltzell

TABLE 5: RADIATED EMISSIONS; CHANNEL 2 - SERIAL PORT CONFIGURATION

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Test Distance (m)
9.046	Qp	V	285	2.0	42.2	-2.8	39.4	88.6	-49.2	1
26.689	Qp	V	35	1.0	52.2	-1.3	50.9	88.6	-37.7	1
26.689	Qp	V	10	1.0	31.6	-1.3	30.3	69.5	-39.2	3
27.144	Av	V	270	2.0	57.1	-1.2	55.9	89.5	-33.6	1
27.144	Av	V	295	1.0	48.1	-1.2	46.9	80.0	-33.1	3
54.277	Qp	V	350	1.0	38.6	-21.6	17	49.5	-32.5	1
54.277	Qp	H	80	3.0	28.0	-21.5	6.5	40.0	-33.5	3
81.416	Qp	H	275	1.8	42.5	-21.4	21.1	49.5	-28.4	1
81.416	Qp	H	240	4.0	34.7	-21.4	13.3	40.0	-26.7	3
108.555	Qp	H	280	1.4	36.3	-16.6	19.7	53.1	-33.4	1
108.555	Qp	H	290	3.0	25.8	-16.6	9.2	43.5	-34.3	3
135.694	Qp	H	295	1.0	35.2	-16.5	18.7	53.1	-34.4	1
135.694	Qp	H	40	3.0	23.6	-16.5	7.1	43.5	-36.4	3
162.833	Qp	H	295	1.0	40.4	-17.7	22.7	53.1	-30.4	1
162.833	Qp	H	284	1.8	27.7	-17.7	10.0	43.5	-33.5	3
189.972	Qp	H	295	1.0	41.1	-18.5	22.6	53.1	-30.5	1
189.972	Qp	H	285	1.5	26.7	-18.5	8.2	43.5	-35.3	3
217.111	Qp	H	280	1.0	36.6	-17.7	18.9	55.6	-36.7	1
217.111	Qp	H	275	1.4	2.0	-17.7	8.3	46.0	-37.7	3
244.250	Qp	H	280	1.0	30.2	-15.5	14.7	55.6	-40.9	1
244.250	Qp	H	280	1.4	21.4	-15.5	5.9	46.0	-40.1	3
271.389	Qp	H	280	1.0	26.1	-14.0	12.1	55.6	-43.5	1
271.389	Qp	H	275	1.0	21.6	-14.0	7.6	46.0	-38.4	3
298.527	Qp	H	275	1.6	24.2	-13.5	10.7	55.6	-44.9	1
379.942	Qp	H	280	1.0	27.4	-11.0	16.4	46.0	-29.6	3
977.000	Qp	H	275	1.0	28.5	-1.6	26.9	63.5	-36.6	1


See Appendix B for Radiated Test Methodology.

WORST CASE EMISSION DATA

TEST PERSONNEL:

Signature:

Date: 6/5/99



Typed/Printed Name: Daniel W. Baltzell

5.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FI(\text{dBuV/m}) = SAR(\text{dBuV}) + SCF(\text{dB/m})$$

FI = Field Intensity

SAR = Spectrum Analyzer Reading

SCF = Site Correction Factor

The Site Correction Factor (SCF) used in the above equation is determined empirically, and is expressed in the following equation:

$$SCF(\text{dB/m}) = -PG(\text{dB}) + AF(\text{dB/m}) + CL(\text{dB})$$

SCF = Site Correction Factor

PG = Pre-amplifier Gain

AF = Antenna Factor

CL = Cable Loss

The field intensity in microvolts per meter can then be determined according to the following equation:

$$FI(\text{uV/m}) = 10^{FI(\text{dBuV/m})/20}$$

For example, assume a signal at a frequency of 125 MHz has a received level measured as 49.3 dBuV. The total Site Correction Factor (antenna factor plus cable loss minus preamplifier gain) for 125 MHz is -11.5 dB/m. The actual radiated field strength is calculated as follows:

$$49.3 \text{ dBuV} - 11.5 \text{ dB} = 37.8 \text{ dBuV/m}$$

$$10^{37.8/20} = 10^{1.89} = 77.6 \text{ uV/m}$$

APPENDIX C: Emissions Equipment List

DESCRIPTION	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. LAB
AMPLIFIER	HEWLETT PACKARD	11975A	2304A00348	TEST EQUITY
AMPLIFIER (S/A 1)	RHEIN TECH	PR-1040	00001	RTL
AMPLIFIER (S/A 2)	RHEIN TECH	RTL2	900723	RTL
AMPLIFIER (S/A 3)	RHEIN TECH	8447F	2944A03783	RTL
AMPLIFIER (S/A 4)	RHEIN TECH	8447D	2727A05397	RTL
BICONICAL/LOG ANTENNA 1	ANTENNA RESEARCH	LPB-2520	1037	LIBERTY LABS
BICONICAL/LOG ANTENNA 2	ANTENNA RESEARCH	LPB-2520	1036	LIBERTY LABS
FIELD SITE SOURCE	EMCO	4610	9604-1313	RTL
FILTER (ROOM 1)	SOLAR	8130	947305	RTL
FILTER (ROOM 2)	SOLAR	8130	947306	RTL
HARMONIC MIXER 1	HEWLETT PACKARD	11970K	2332A00563	TELOGY
HARMONIC MIXER 2	HEWLETT PACKARD	11970A	2332A01199	TELOGY
HORN ANTENNA 1	EMCO	3160-10	9606-1033	EMCO
HORN ANTENNA 2	EMCO	3160-9	9605-1051	EMCO
ROD ANTENNA	EMCO			
HORN ANTENNA 3	EMCO	3160-7	9605-1054	EMCO
HORN ANTENNA 4	EMCO	3160-8	9605-1044	EMCO
HORN ANTENNA 5	EMCO	3160-03	9508-1024	EMCO
LISN (ROOM 1/L1)	SOLAR	7225-1	900727	ACUCAL
LISN (ROOM 1/L2)	SOLAR	7225-1	900726	ACUCAL
LISN (ROOM 2/L1)	SOLAR	7225-1	900078	ACUCAL
LISN (ROOM 2/L2)	SOLAR	7225-1	900077	ACUCAL
PRE-AMPLIFIER	HEWLETT PACKARD	8449B OPT	3008A00505	TELOGY
QUASI-PEAK ADAPTER (S/A 1)	HEWLETT PACKARD	85650A	3145A01599	ACUCAL
QUASI-PEAK ADAPTER (S/A 2)	HEWLETT PACKARD	85650A	2811A01276	ACUCAL
QUASI-PEAK ADAPTER (S/A 3)	HEWLETT PACKARD	85650A	2521A00473	ACUCAL
QUASI-PEAK ADAPTER (S/A 4)	HEWLETT PACKARD	85650A	2521A01032	ACUCAL
RF PRESELECTOR (S/A 1)	HEWLETT PACKARD	85685A	3146A01309	ACUCAL
SIGNAL GENERATOR (HP)	HEWLETT PACKARD	8660C	1947A02956	ACUCAL
SIGNAL GENERATOR (WAVETEK)	WAVETEK	3510B	4952044	ACUCAL
SPECTRUM ANALYZER 1	HEWLETT PACKARD	8566B	3138A07771	ACUCAL
SPECTRUM ANALYZER 2	HEWLETT PACKARD	8567A	2841A00614	ACUCAL
SPECTRUM ANALYZER 4	HEWLETT PACKARD	8567A	2727A00535	ACUCAL
TUNABLE DIPOLE	EMCO	3121	274	LIBERTY LABS

APPENDIX D: Conducted and Radiated Test Methodology

CONDUCTED EMISSIONS MEASUREMENTS

Note: The conducted emissions measurements are not applicable since the device is battery operated.

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 400 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 400 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 450 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.

RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range; the EUT was scanned indoors at one meter distance. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated at one meter distance during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the open-field test site at an antenna to EUT distance of 1 meter for emissions between 30 MHz and 1000 MHz. Since the EUT transmits at Channel 1 = 27.045 MHz and Channel 2 = 27.145 MHz a vertical rod antenna was used to measure the carrier frequency and all other emissions between 9kHz and 30 MHz per ANSI 63.4. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to 1000 MHz. All other spurious noise with in and outside the restricted band was investigated. The square of inverse linear distance was used to extrapolate the new limit since the limit per FCC 15.209 is given at 30 meters.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 200 Hz for frequencies between 10 kHz and 150 kHz, 9 kHz for frequencies between 150 kHz and 30 MHz, and 120 kHz for frequencies between 30 MHz and 1000 MHz. No video filter less than 10 times the resolution bandwidth was used. When any clock exceeds 108 MHz, the EUT was tested between 1 to 2 Gigahertz in peak mode with the resolution bandwidth set at 1 MHz as stated in ANSI C63.4. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.

APPENDIX F:

USER'S MANUAL
