



Nemko Korea Co., Ltd.

67-1 & 300-2, Osan-Ri, Mohyun-Myun, Cheoin-Gu, Yongin-City, Gyeonggi-Do, KOREA

TEL:+ 82 31 330 1700 FAX:+ 82 31 322 2332

FCC PART 15 Class II Permissive Change

Applicant :

Daewoo Electronics Corporation
Kitchen Appliances Div. R&D Center,
412-2, Cheongcheon2-Dong, Bupyeong-Gu,
Incheon, 403-032, Korea
Attn : Mr. Seongok Kim

Dates of Issue : July 24, 2012
Test Report No. : NK-12-E-491
Test Site : Nemko Korea Co., Ltd.
EMC site, Korea

FCC ID

C5F7NF18M0110N

Brand Name

DAEWOO

Contact Person


**Daewoo Electronics Corporation
Kitchen Appliances Div. R&D Center,
412-2, Cheongcheon2-Dong, Bupyeong-Gu,
Incheon, 403-032, Korea
Mr. Seongok Kim
Telephone No. : + 82 32 510 7919**

Applied Standard: Part 18 & 2
Classification : Consumer ISM equipment
EUT Type: Microwave Oven

Remark : This Class II Permissive change test report was based on test report no. NK08E770 which was issued on Oct. 14, 2012.

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in MP-5:1986.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

 July 24, 2012.

**Tested By : Byoungjin Lim
Engineer**

 July 24, 2012

**Reviewed By : Deokha Ryu
Technical Manager**

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
EUT INFORMATION	5
DESCRIPTION OF TESTS (Radiation Hazard)	6
DESCRIPTION OF TESTS (Input Power Measurement)	6
DESCRIPTION OF TESTS (RF Output Power Measurement)	6
DESCRIPTION OF TESTS (Operating Frequency Measurements)	6
DESCRIPTION OF TESTS (Conducted Emissions)	7
DESCRIPTION OF TESTS (Radiated Emissions)	8
TEST DATA (Radiation Hazard)	9
TEST DATA (Input Power Measurement)	9
TEST DATA (RF Output Power Measurement)	9
TEST DATA (Operating Frequency Measurements)	10
TEST DATA (Conducted Emissions)	12
TEST DATA (Radiated Emissions)	13
PLOT OF EMISSIONS (Operating Frequency Measurements)	16
PLOT OF EMISSIONS (Conducted Emissions Diagram)	34
PLOT OF EMISSIONS (Radiated Emissions Diagram)	36
ACCURACY OF MEASUREMENT	40
LIST OF TEST EQUIPMENT	45
APPENDIX A - SAMPLE LABEL	46
APPENDIX B - PHOTOGRAPHS OF TEST SET-UP	47
APPENDIX C - EUT PHOTOGRAPHS	52
APPENDIX D - SCHEMATIC DIAGRAM	64
APPENDIX E - USER'S MANUAL	65
APPENDIX F - BLOCK DIAGRAM	66

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 18.

Responsible Party : Daewoo Electronics Corporation

Contact Person : Mr. Seongok Kim
Tel No.: + 82 32 510 7919

Manufacturer : Daewoo Electronics Corporation
Kitchen Appliances Div. R&D Center, 412-2,
Cheongcheon2-Dong, Bupyeong-Gu, Incheon, 403-032,
Korea

Factory : Daewoo Microwave Oven Co., Ltd.
Development Area, Binhai New Area Tianjin China

- FCC ID: C5F7NF18MO110N
- Model: KOR-188H
- Variant Model: KOR-187H, KOR-18**
Note 1) First "*" : 0 ~9 or A ~ Z (Enclosure design difference)
Note 2) Second "*" : 0 ~ 9 (Mechanical type) or
A ~ Z (Electronic type)
- Brand Name: DAEWOO
- EUT Type: Microwave Oven
- Applied Standard: FCC Part 18 & Part 2
- Test Procedure(s): MP-5:1986
- Dates of Test: June 16, 2012 to July 20, 2012
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK-12-E-491

※ The model KOR-18AS was tested and was recorded the data in test report.

INTRODUCTION

The measurement procedure described in MP5:1986 for Methods of Measurement of radiated, powerline conducted radio noise, frequency and power output was used in determining emissions emanating from **Daewoo Electronics Corporation**.

FCC ID : **C5F7NF18MO110N, Microwave Oven.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 67-1 & 300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, Korea

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on 2003.



Nemko Korea Co., Ltd.
67-1 & 300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, Korea, 449-852
Tel) + 82 31 330 1700
Fax) + 82 31 330 1701

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Incheon Airport.

EUT INFORMATION

EUT Information

Electric Rating :	a.c. 120 V, 60 Hz
Clock :	4 MHz
Magnetron Type :	RM269 (DAEWOO)
Operating Frequency :	2.45 GHz

Description of the Changes according to FCC part 2.1043

- KOR-18** is identical with basic model KOR-188H, except for model name and rated power consumption.

Item	Before	After
Rated power consumption	1500 W	1600 W

DESCRIPTION OF TESTS

Radiation Hazard

A 700 ml water load was placed in the center of the oven.

The power setting was set to maximum power.

While the oven was operating, the Microwave Survey Meter probe was moved slowly around the door seams to check for leakage.

Input Power Measurement

The EUT was placed on a wooden table 0.8 m at 1 m distance Horn antenna.

A 700ml water load was placed in the center of the oven and the oven set to maximum power. A 700 ml water load was chosen for its compatibility.

Input power and current were measured using a Power Analyzer.

Manufacturers to determine their input ratings commonly use this procedure.

Output Power Measurement

The Caloric Method was used to determine maximum output power.

The initial temperature of a 1000 ml water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 120 seconds. Then the temperature of the water re-measured.

Frequency Measurements

Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 to 125 percent of the nominal rating.

And the load quantity was reduced by evaporation to approximately 20 % of the original quantity with nominal rating.

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m X 1.5 m wooden table 0.4 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room

Rohde & Schwarz (ESH2-Z5) of the 50 ohm/50 uH Line Impedance Stabilization Network (LISN) is bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN.

Power to the LISN is filtered by high-current high insertion loss Power line filters.

The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure.

All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISN,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 20 m sec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function were set to CISPR quasi-peak mode & average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each EME reported was calibrated using the R&S signal generator.

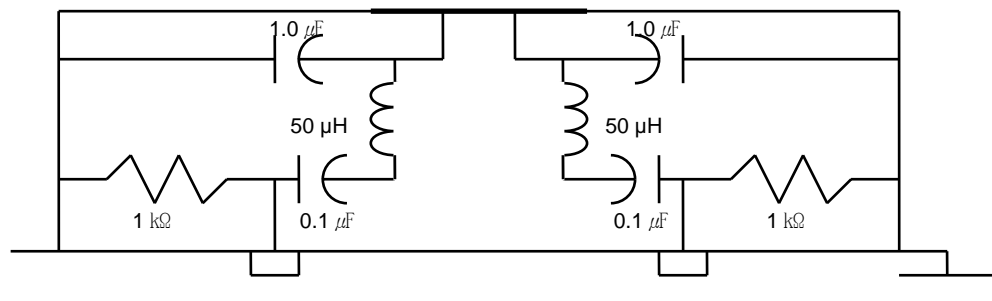


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Preliminary measurement were made indoors at 3 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 0.15 to 30 MHz using Loop Antenna (R&S/HFH2-Z2) and from 30 to 1000 MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1 GHz, Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) was used.

Final Measurements were made indoors at 3 m using Loop Antenna (R&S/HFH2-Z2) for measurement from 0.15 to 30 MHz with RBW 9 kHz & VBW 9 kHz and made outdoor at 3 m using Trilog-Broadband Antenna (Shwarzbeck, VULB9168) for measurement from 30 MHz to 1000 MHz with RBW 100 kHz & VBW 100 kHz and made indoors at 3 m using Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) for measurement from 1 GHz to 25 GHz with RBW 1 MHz & VBW 10 Hz.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver. (FSP40)

The detector function were set to CISPR quasi peak mode and the bandwidth of the receiver were set to 9 kHz, 100 kHz and peak mode 1 MHz depending on the frequency or type of signal.

The Double Ridged Broadband Horn antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re-configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non- metallic 1.0 X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The EUT is rotated about its vertical axis on the turntable, and the polarization and height of the receiving antenna are varied to obtain the highest field strength on the particular frequency under observation.

Each EME reported was calibrated using the R/S signal generator.

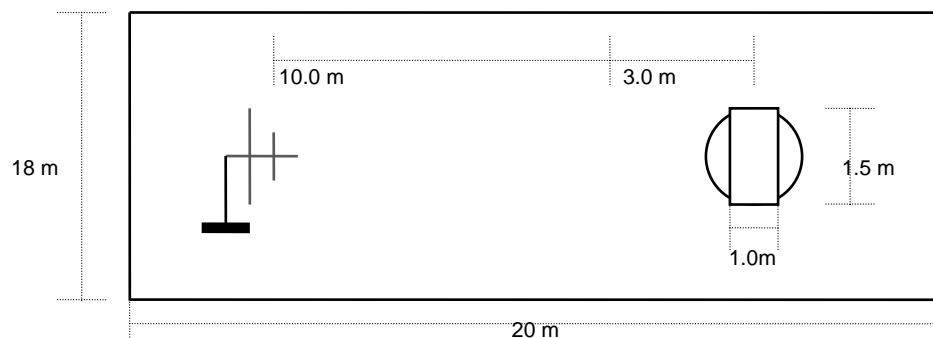


Fig. 3. Dimensions of Outdoor Test Site

TEST DATA

Radiation Hazard

Probe Location	Maximum Leakage [mW/Cm2]	Limit [mW/Cm2]
A	0.06	1.00
B	0.05	1.00
C	0.04	1.00
D	0.02	1.00
All others	0.01	1.00

Input Power Measurement

Operation mode	P rated (W)	P (W)	dP (%)	Required dP (%)
Power Input	1600	1631	1.93	+ 15 %

RF Output Power Measurement

Quantity of Water [ml]	Starting Temperature [Centigrade]	Final Temperature [Centigrade]	Temp. Rise	Elapsed Time [seconds]	RF Power [watts]
1000	10	36.8	26.8	120	935

$$\text{RF Power} = \frac{(4.187 \text{ Joules/Cal}) \times (\text{Volume in ml}) \times (\text{Temp. Rise})}{\text{Time in seconds}}$$



Tested by : **Byoungjin Lim**

TEST DATA

Operating Frequency measurements

► Frequency vs Line Voltage Variation Test

[Room Temperature : 23.4 °C]

Line Voltage Variation (a.c. V)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
96	H	Lower : 2426.6	Lower : 2400 MHz Upper : 2500 MHz
	H	Upper : 2462.0	
	V	Lower : 2430.2	
	V	Upper : 2469.8	
108	H	Lower : 2432.6	
	H	Upper : 2457.2	
	V	Lower : 2435.6	
	V	Upper : 2462.0	
120	H	Lower : 2433.8	
	H	Upper : 2463.8	
	V	Lower : 2429.0	
	V	Upper : 2459.6	
132	H	Lower : 2431.4	
	H	Upper : 2460.2	
	V	Lower : 2430.2	
	V	Upper : 2462.0	
150	H	Lower : 2433.8	
	H	Upper : 2459.0	
	V	Lower : 2432.6	
	V	Upper : 2459.6	

NOTE :

1. *Pol. H = Horizontal V = Vertical
2. Initial load : 1000 ml of water in the beaker.
3. Line voltage varied from a.c. 96 V to a.c. 150 V.
4. ISM Frequency : 2450 MHz, Tolerance : ± 50 MHz

RESULT : Pass



Tested by : **Byoungjin Lim**

TEST DATA

► Frequency vs Load Variation Test

[Room Temperature : 23.4 °C]

Volume of water (ml)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
200	H	Lower : 2424.8	Lower : 2400 MHz Upper : 2500 MHz
	H	Upper : 2469.8	
	V	Lower : 2426.0	
	V	Upper : 2469.2	
400	H	Lower : 2429.6	
	H	Upper : 2463.8	
	V	Lower : 2429.6	
	V	Upper : 2458.4	
600	H	Lower : 2429.6	
	H	Upper : 2463.2	
	V	Lower : 2442.2	
	V	Upper : 2456.0	
800	H	Lower : 2432.6	
	H	Upper : 2458.4	
	V	Lower : 2432.6	
	V	Upper : 2458.4	
1000	H	Lower : 2437.4	
	H	Upper : 2457.2	
	V	Lower : 2436.2	
	V	Upper : 2458.4	

NOTE :

1. *Pol. H = Horizontal, V = Vertical
2. The water load was varied between 200 ml to 1000 ml.
3. Frequency was measured by using nominal voltage (a.c. 120 V).
4. ISM Frequency : 2450 MHz, Tolerance : ± 50 MHz

RESULT : Pass



Tested by : **Byoungjin Lim**

TEST DATA

Conducted Emissions

FCC ID : C5F7NF18MO110N

[Room Temperature : 23.3 °C]

Frequency (MHz)	Level (dBuV)		*) Factor (dB)	**) Line	Limit (dBuV)		Margin (dB)	
	Q-Peak	Average			Q-Peak	Average	Q-Peak	Average
0.15	47.1	21.9	0.2	N	66.0	56.0	18.9	34.1
0.25	53.1	25.5	0.2	L	61.8	51.8	8.7	26.3
0.30	54.2	25.1	0.2	L	60.2	50.2	6.0	25.1
0.33	54.4	25.3	0.1	L	59.5	49.5	5.1	24.2
0.65	32.6	12.6	0.8	L	56.0	46.0	23.4	33.4
0.91	32.7	11.9	2.0	L	56.0	46.0	23.3	34.1

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.
3. See attached Plots.
4. Line : L = Line , N = Neutral
5. The limit for consumer device is on the FCC Part section 18.307(b).



Tested by : **Byoungjin Lim**

TEST DATA

Radiated Emissions

FCC ID : C5F7NF18MO110N

▶ 0.15 MHz ~ 30 MHz

[Room Temperature : 22.6 °C]

Frequency (MHz)	Reading (dB μ N)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
The level was under 20 dB below limit.						

<Radiated Measurements at 3 meters>

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300 / 3) = 40 \text{ dBuV/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT} (\text{RF Power} / 500))$
5. All other emissions were measured while a 700 ml load was placed in the center of the oven.
6. See attached Plots.
7. The limit for consumer device is on the FCC Part section 18.305.



Tested by : **Byoungjin Lim**

TEST DATA

Radiated Emissions

FCC ID : C5F7NF18MO110N

▶ 30 MHz ~ 1 GHz

[Room Temperature : 24.9 °C]

Frequency (MHz)	Reading (dB μ V/m)	Pol* (H/V)	Antenna Heights (cm)	Turntable Angles (°)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
158.04	33.6	V	190	165	-14.3	19.3	70.7	51.4
391.81	34.2	H	190	120	-13.8	20.4	70.7	50.3
504.33	31.0	H	190	345	-8.9	22.1	70.7	48.6
661.47	33.1	H	190	30	-7.4	25.7	70.7	45.0
833.16	31.4	V	160	15	-4.2	27.2	70.7	43.5
920.46	31.7	V	190	210	-2.0	29.7	70.7	41.0

<Radiated Measurements at 3 meters>

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300/3) \doteq 40 \text{ dB } \mu\text{N/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT} (\text{RF Power}/500))$
5. All other emissions were measured while a 700 ml load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.



Tested by : **Byoungjin Lim**

TEST DATA

Radiated Emissions

FCC ID : C5F7NF18MO110N

► Above 1 GHz

[Room Temperature : 23.0 °C]

Frequency (MHz)	Pol* (H/V)	Antenna Heights (cm)	Turntable Angles (°)	Reading Level (dBμV)	Total Loss** (dB)	Result at 3 m		K	Results at 300 m (μV/m)	Limits at 300 m (μV/m)
						(dBμV/m)	(μV/m)			
4907.07	H	160	0	53.5	-1.1	52.4	416.9	0.01	4.2	34.2
7358.10	H	160	270	45.9	6.4	52.3	412.1	0.01	4.1	34.2
9811.30	H	190	0	47.0	10.1	57.1	716.1	0.01	7.2	34.2
12259.02	V	130	0	38.8	13.3	52.1	402.7	0.01	4.0	34.2
14700.07	H	190	45	41.6	15.9	57.5	749.9	0.01	7.5	34.2
17196.97	V	160	315	35.8	20.3	56.1	638.3	0.01	6.4	34.2

<Radiated Measurements at 3 meters>

NOTES:


- * Pol. H=Horizontal V=Vertical
- ** Total Loss = Antenna Factor + Cables Loss + Amplifier + HPF (High Pass Filter)
- Field Strength (at 300 m) (uV/m) = $K * 10^{[Fieldstrength\ at\ 3\ m\ (dBuV/m) / 20]}$
- The limit at 300 meters is $25 * SQRT (RF\ Power/500)$
- Load for measurement of radiation on second and third harmonic : Two loads, one of 700 ml and the other of 300 ml, of water were used. Each load was tested both with the beaker located in the center of the oven and with it in the corner.
- The test was performed at peak detector mode with average.
- The limit for consumer device is on the FCC Part section 18.305.



Tested by : **Byoungjin Lim**

PLOTS OF EMISSIONS

- **Frequency vs Line Voltage Variation Test**

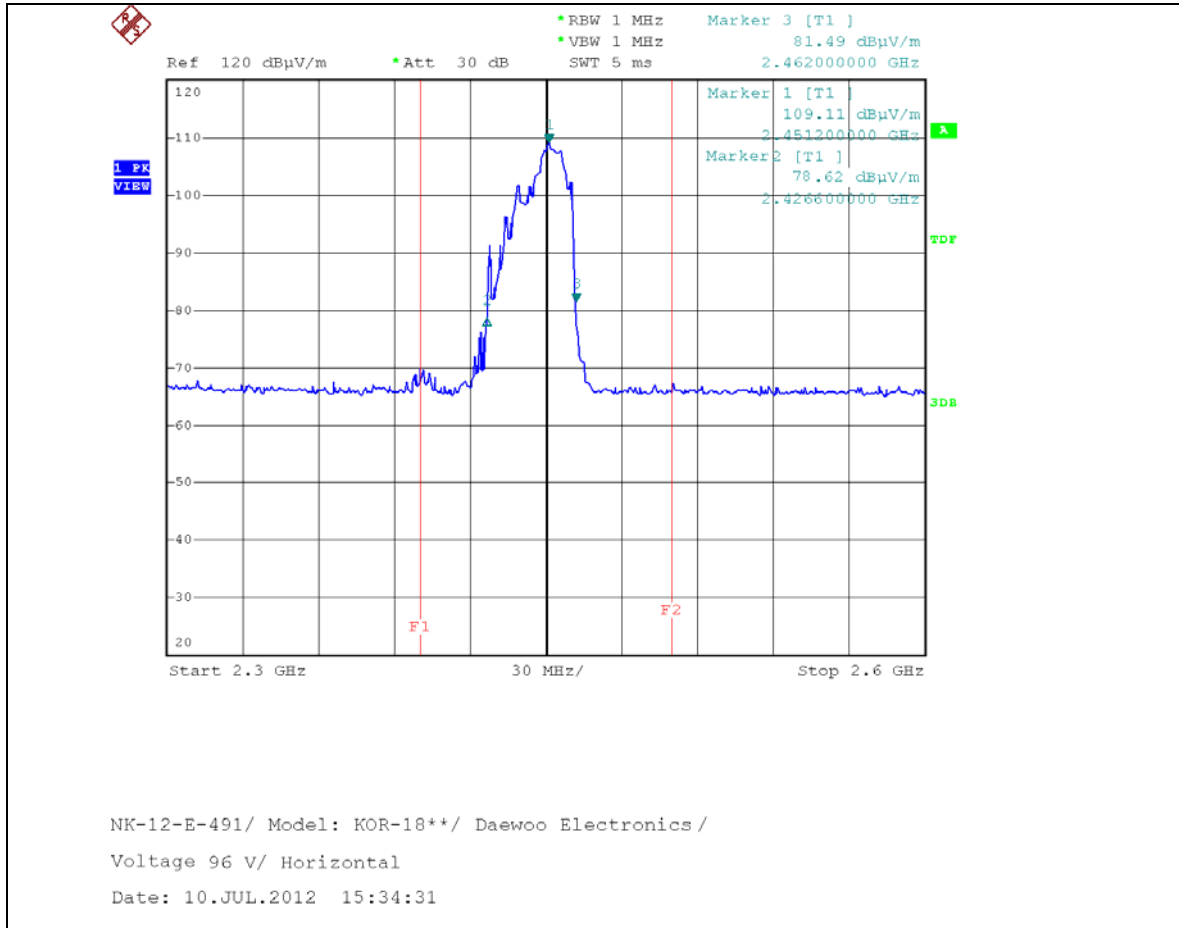

Horizontal (96 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**



Vertical (96 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

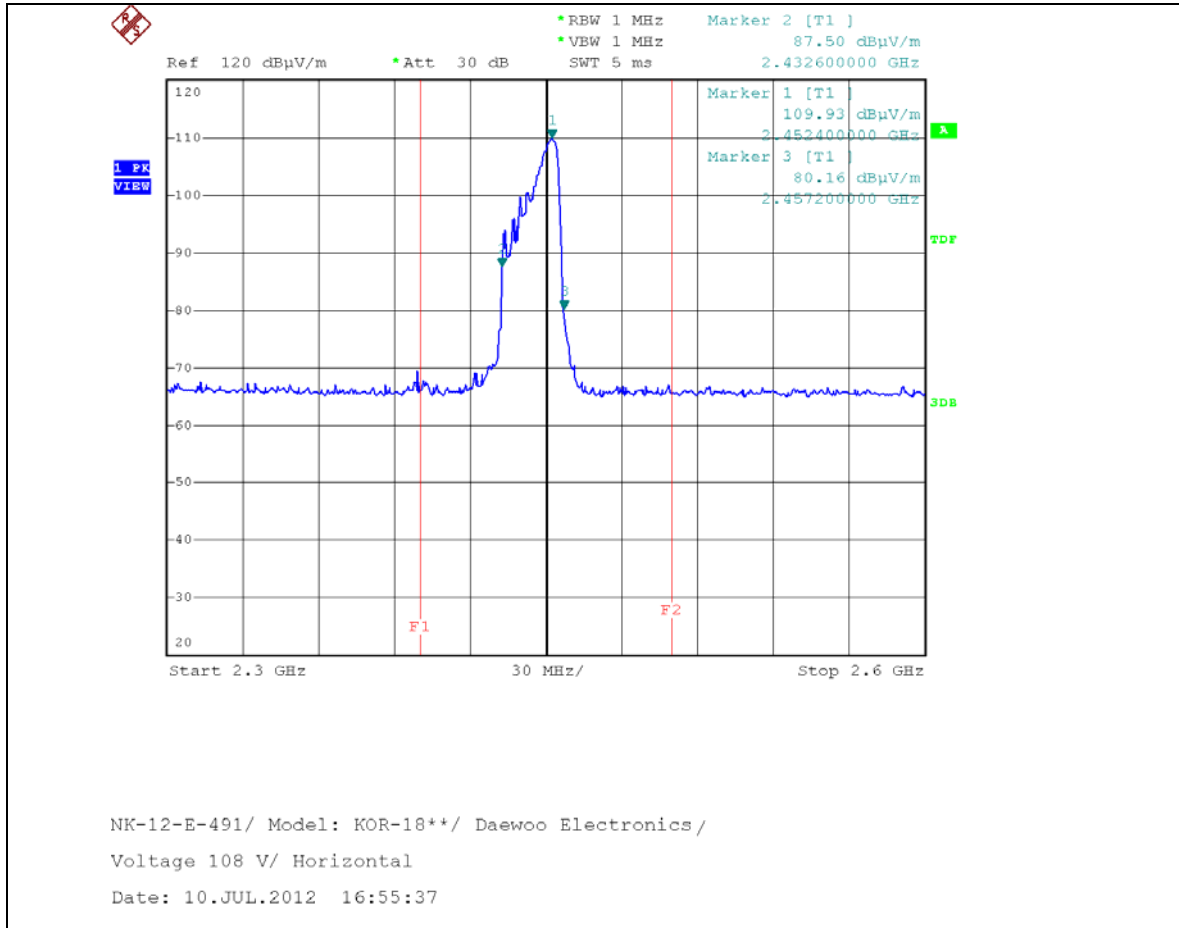

Horizontal (108 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

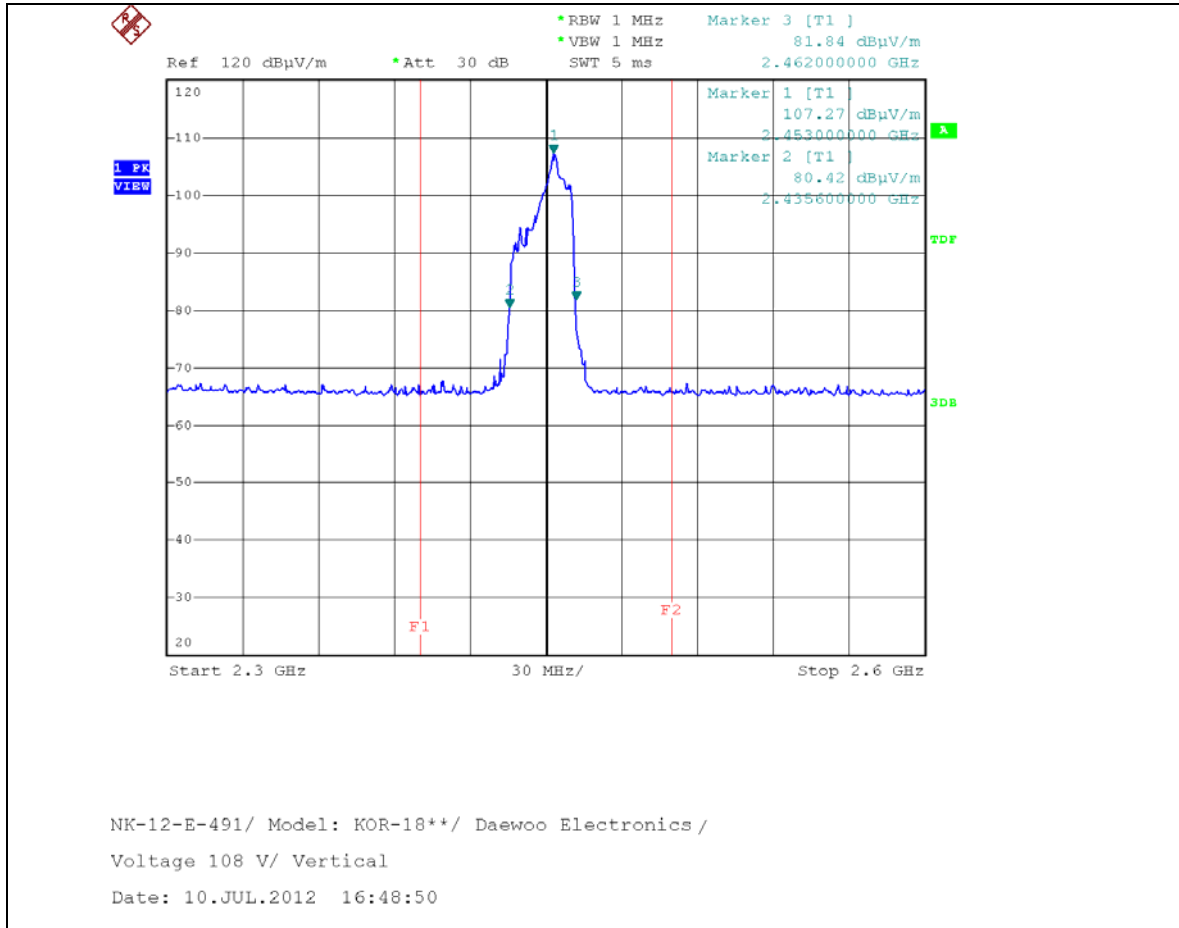

Vertical (108 V, 1000 ml)

PLOTS OF EMISSIONS

- **Frequency vs Line Voltage Variation Test**

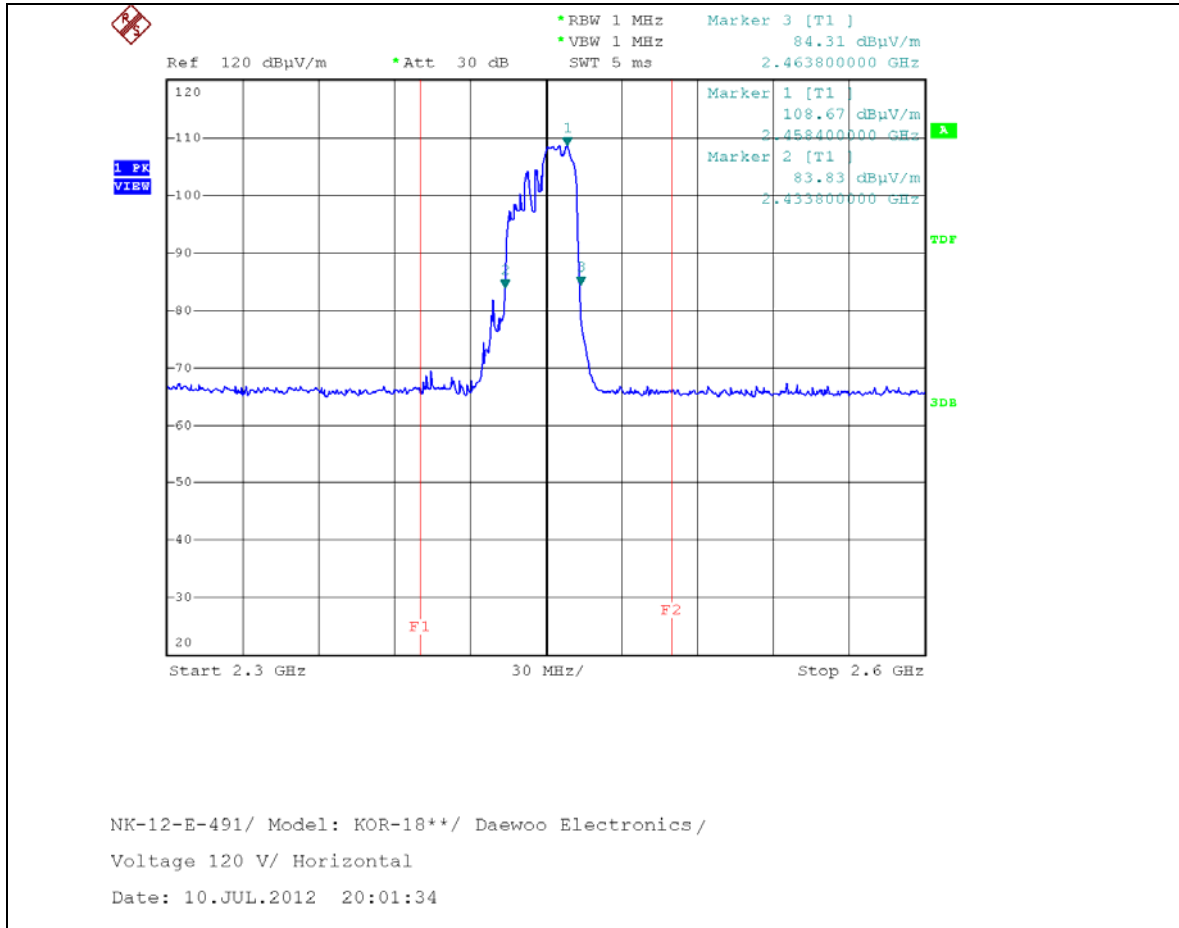

Horizontal (120 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**



Vertical (120 V, 1000 ml)

PLOTS OF EMISSIONS

- **Frequency vs Line Voltage Variation Test**

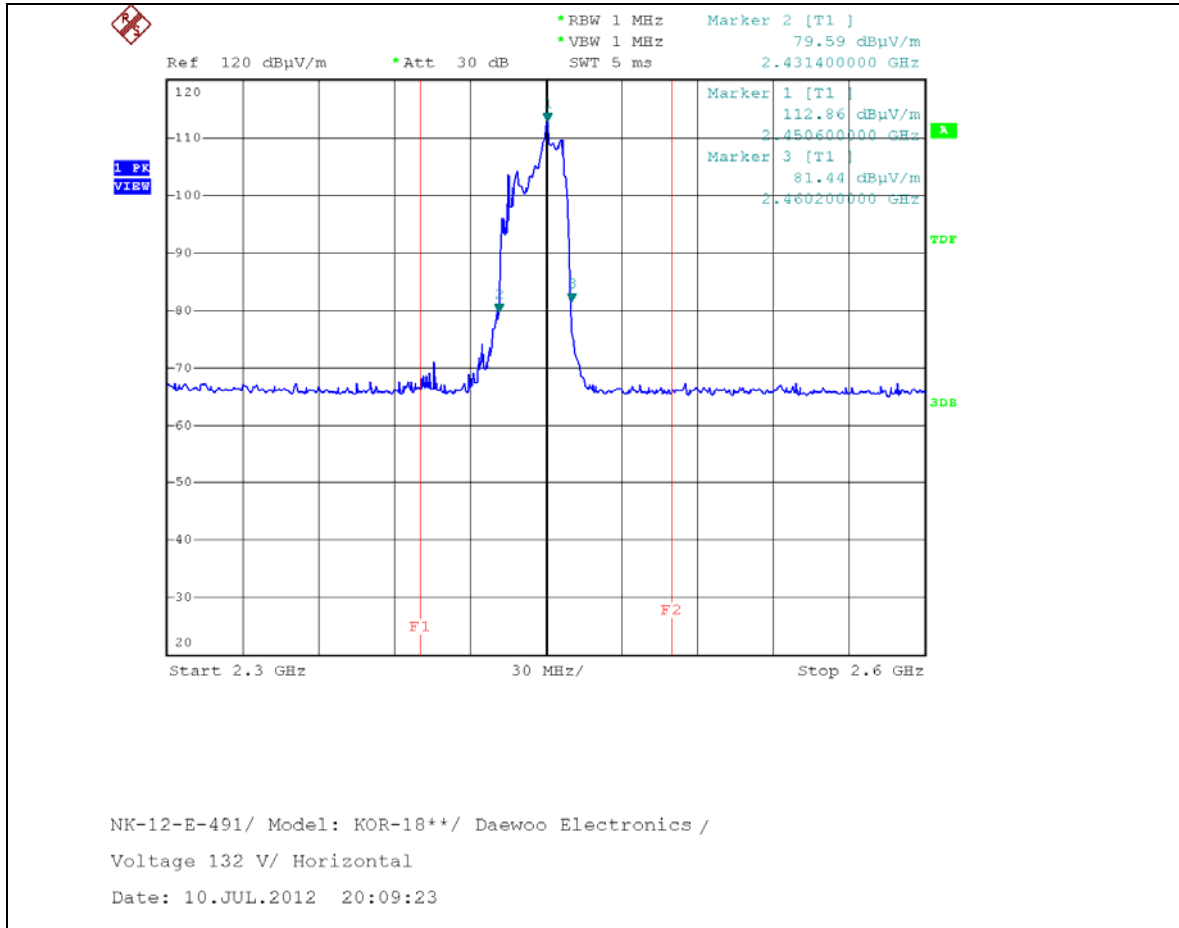

Horizontal (132 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**



Vertical (132 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

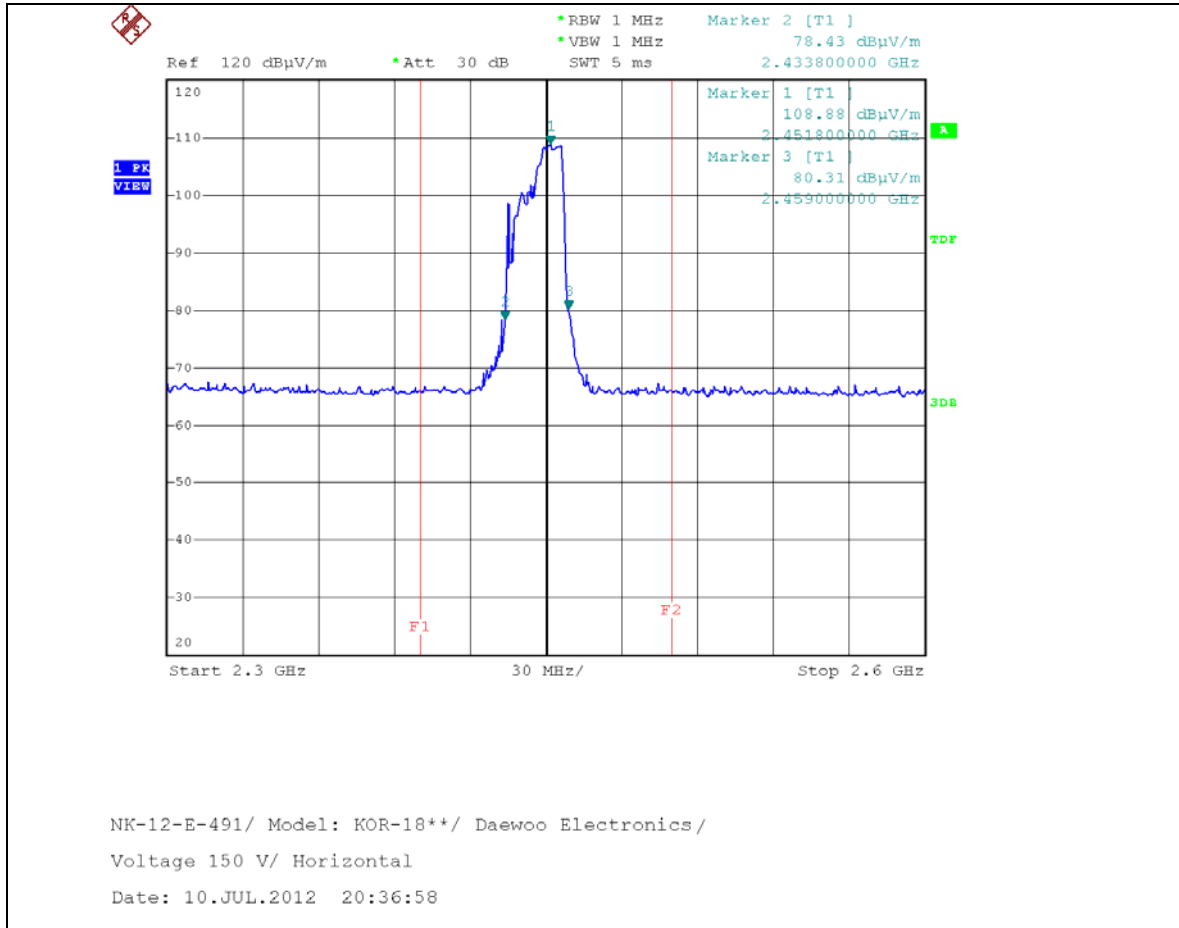

Horizontal (150 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

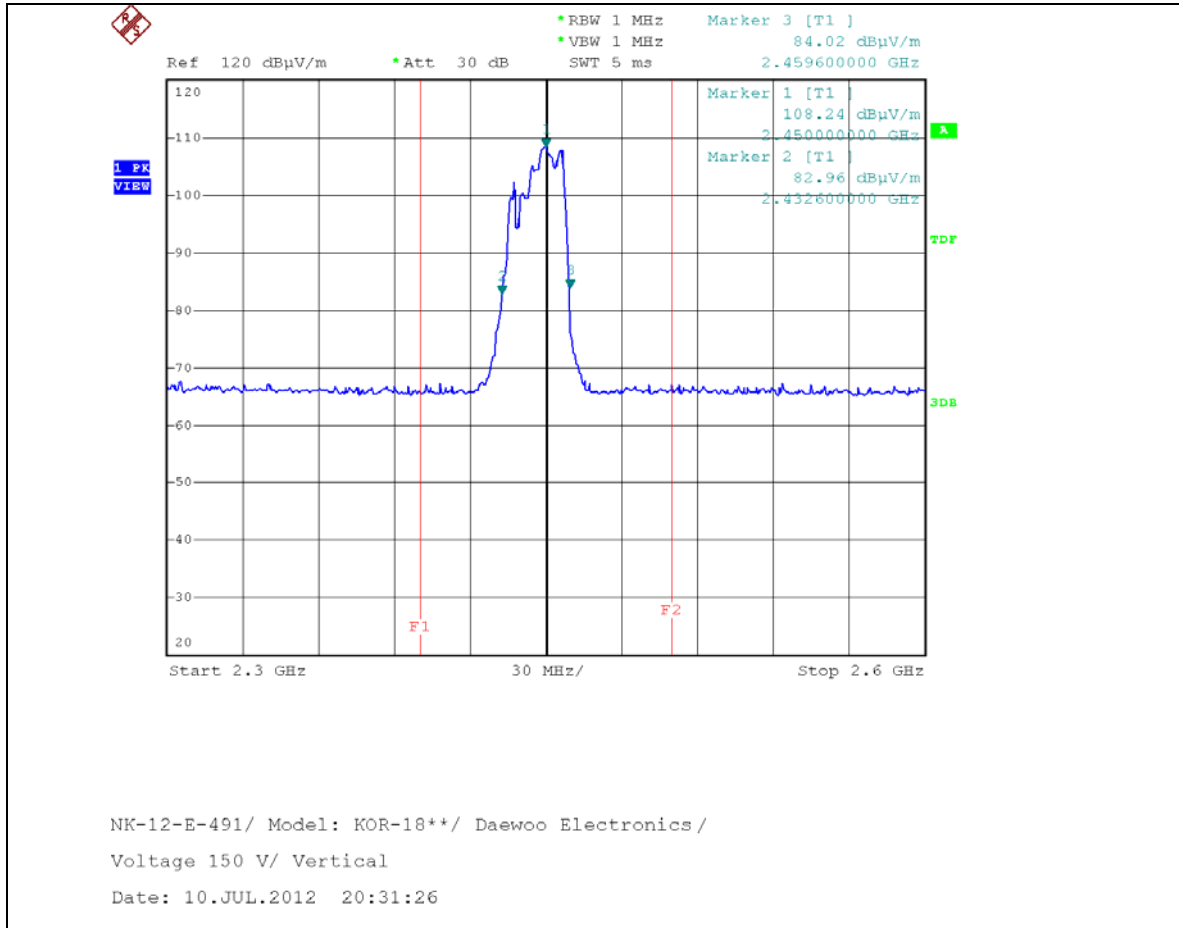

Vertical (150 V, 1000 ml)

PLOTS OF EMISSIONS

- **Frequency vs Load Variation Test**

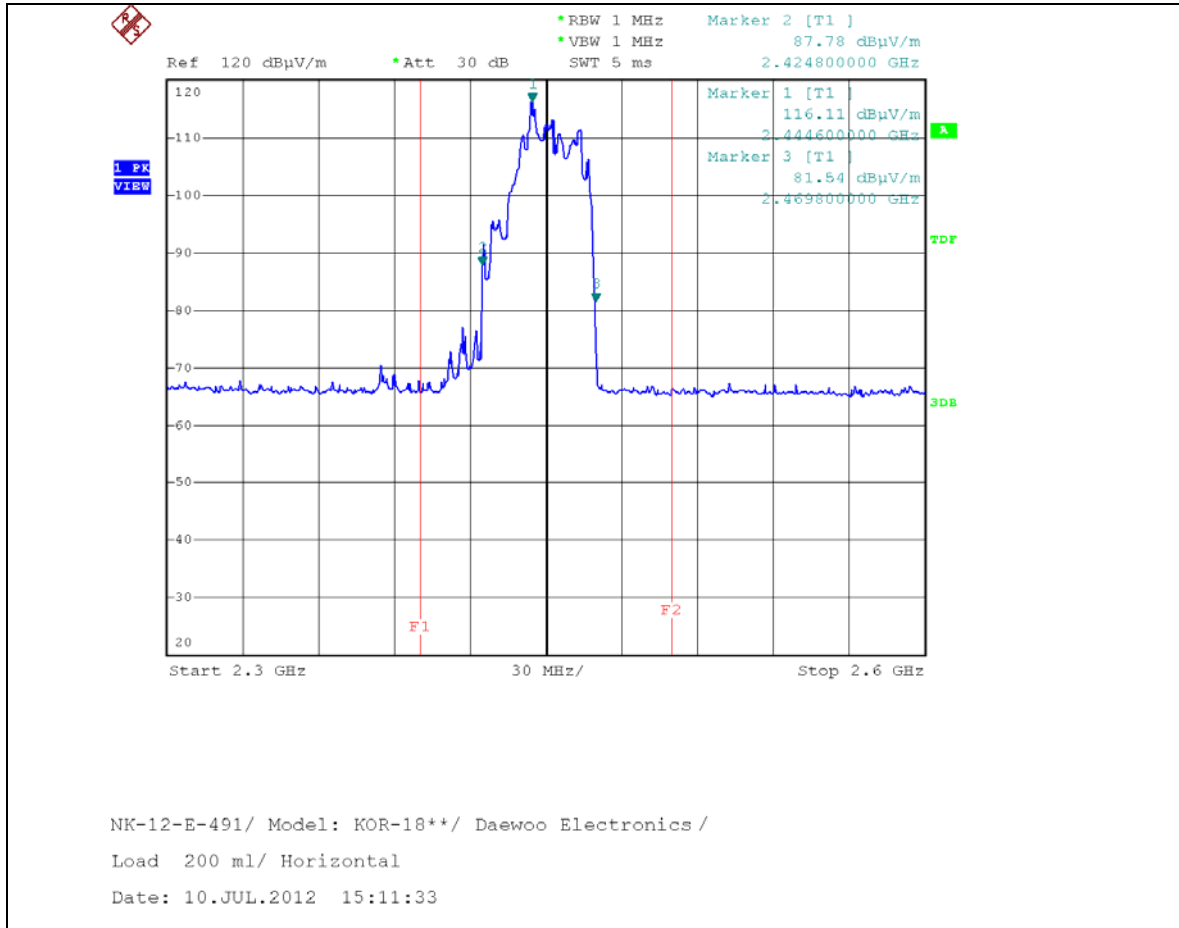

Horizontal (120 V, 200 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**



Vertical (120 V, 200 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

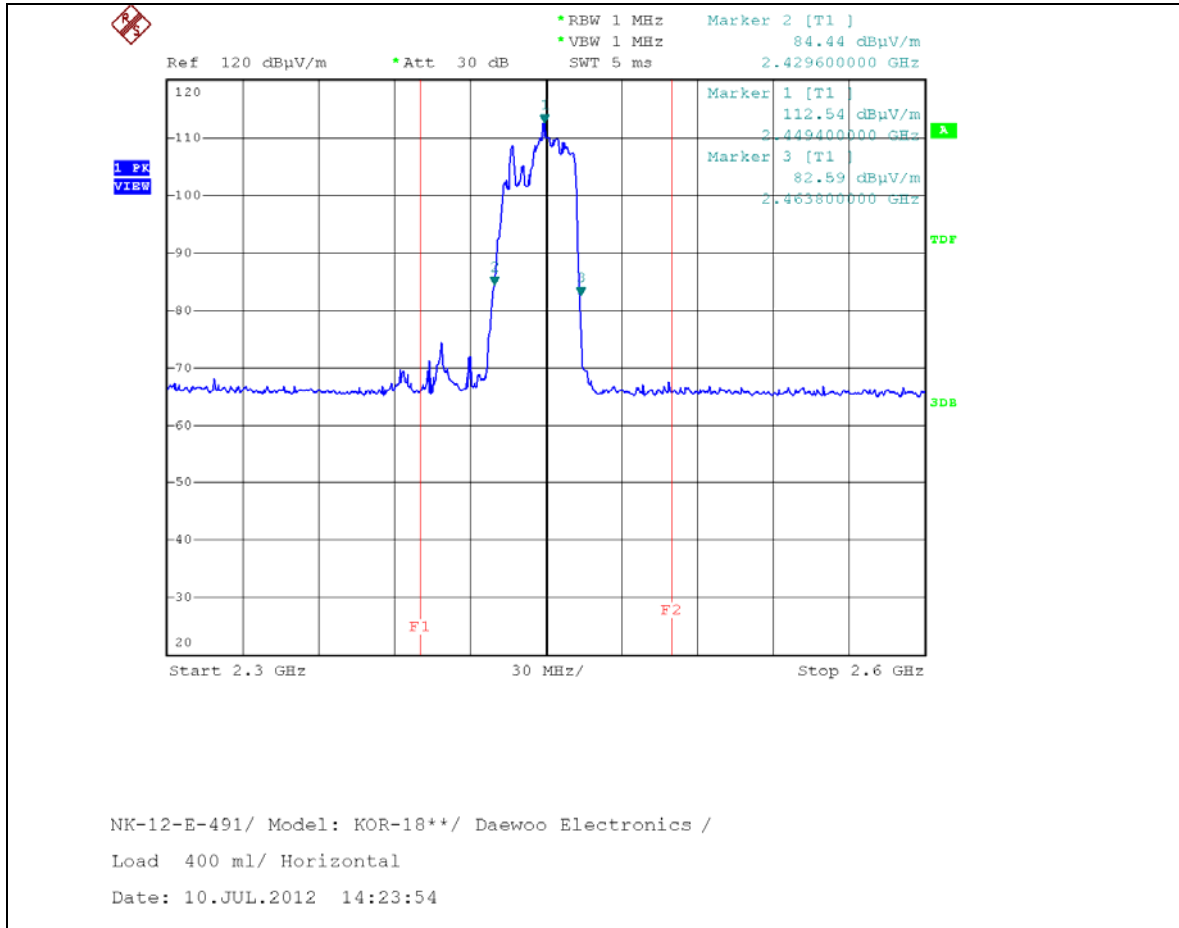

Horizontal (120 V, 400 ml)

PLOTS OF EMISSIONS

- **Frequency vs Load Variation Test**

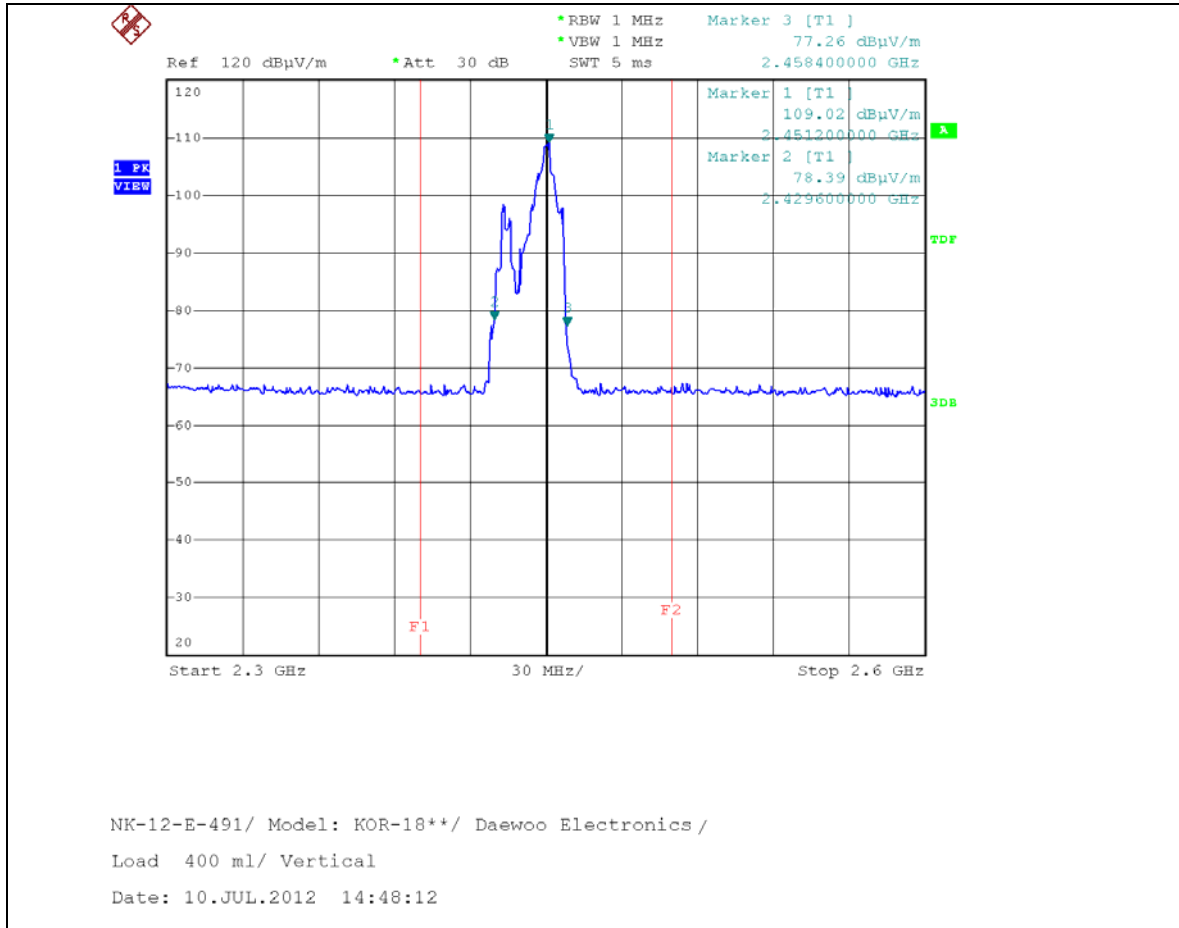

Vertical (120 V, 400 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**



Horizontal (120 V, 600 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

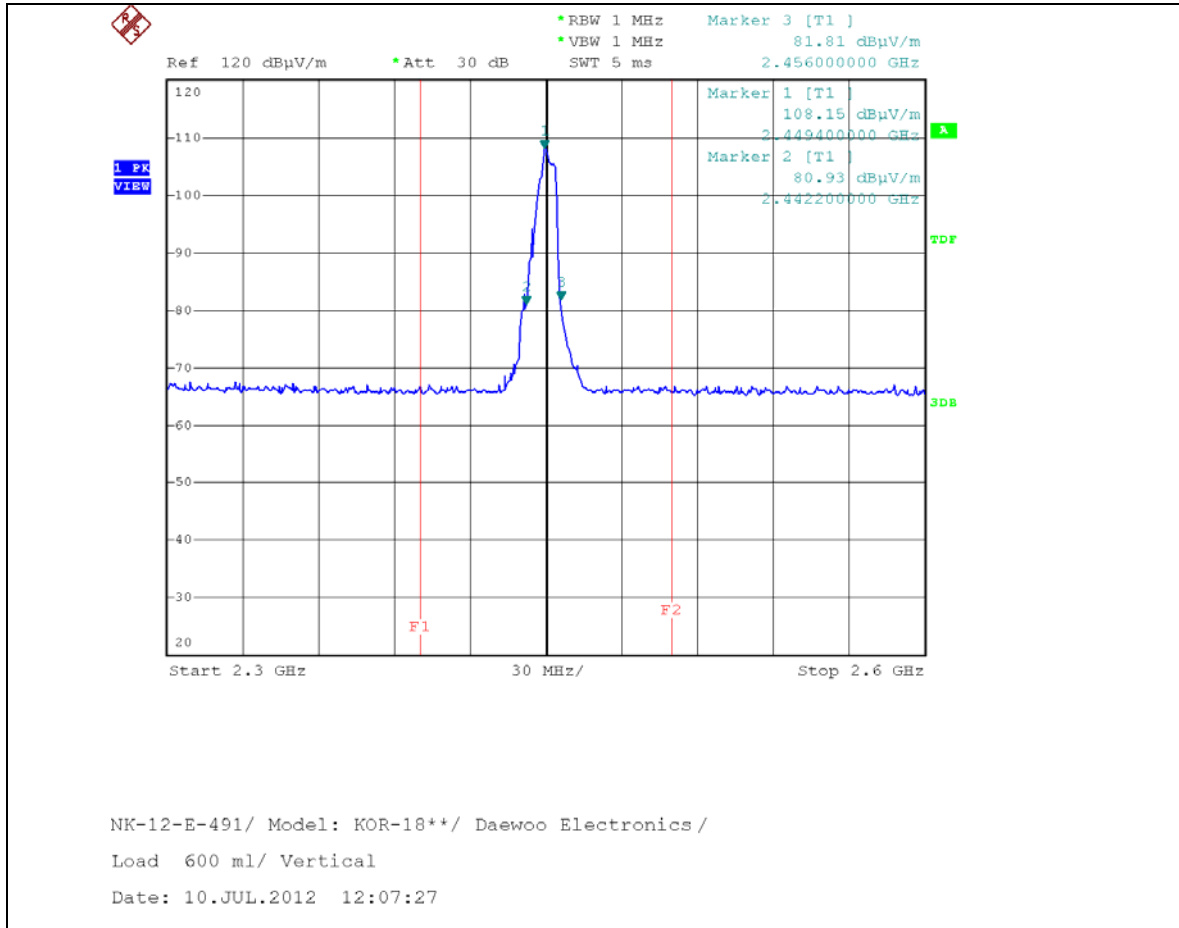

Vertical (120 V, 600 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

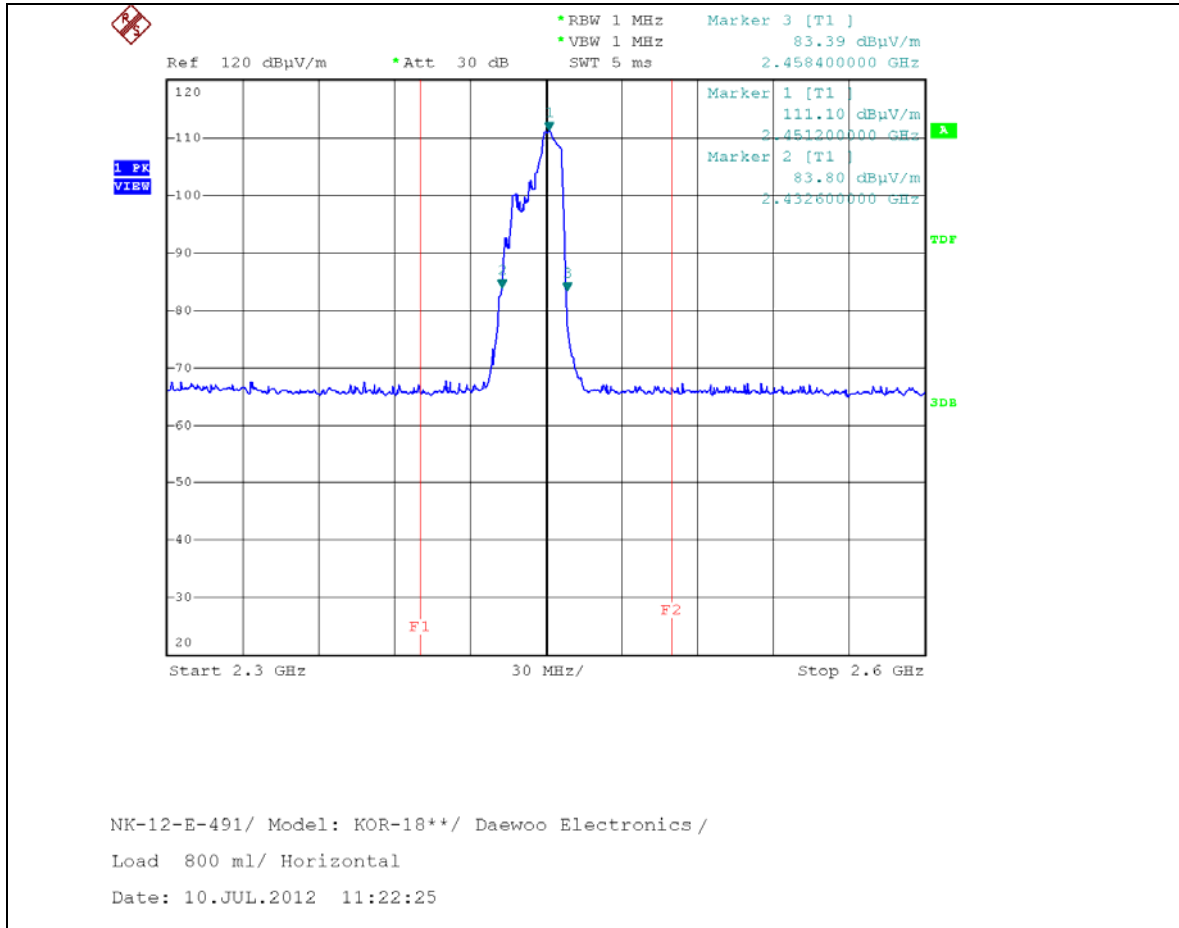

Horizontal (120 V, 800 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

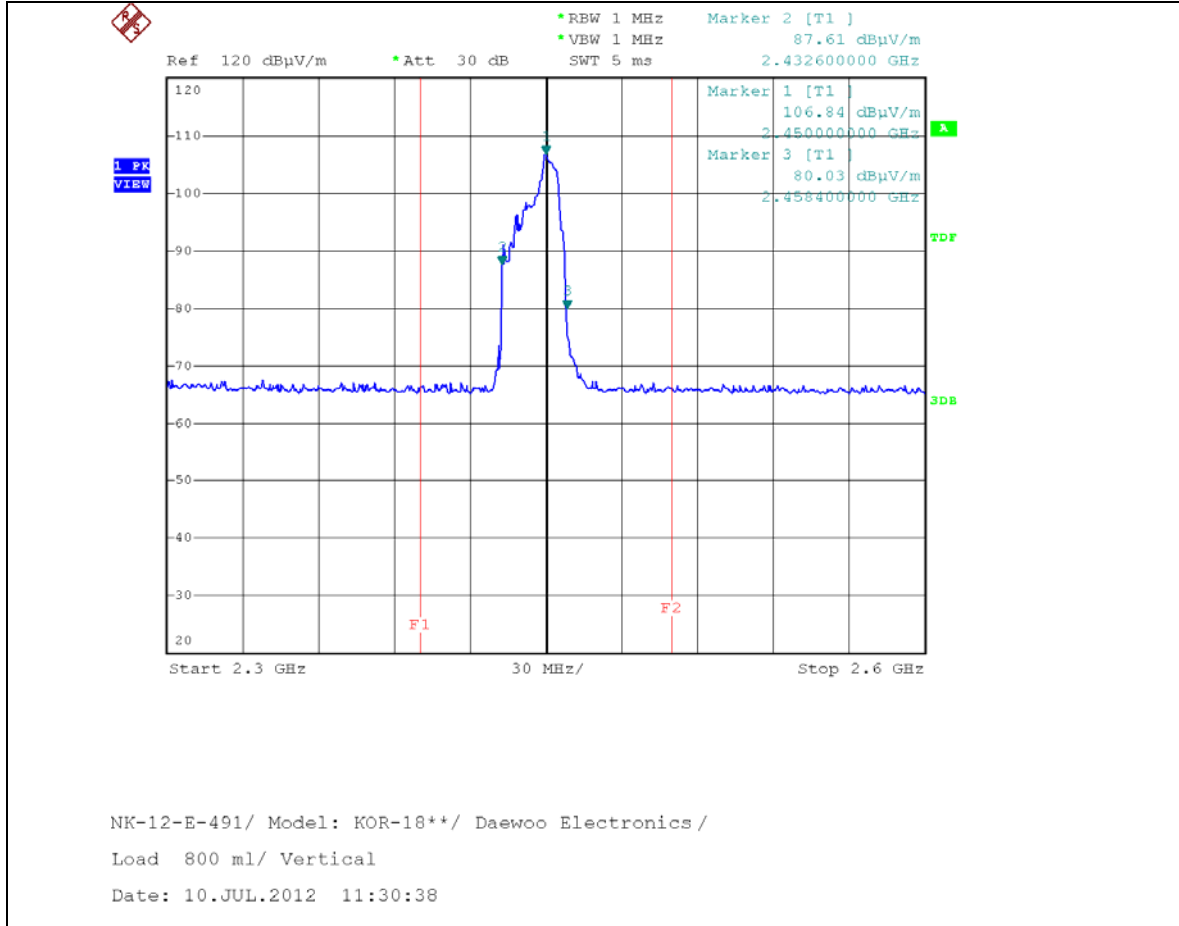

Vertical (120 V, 800 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

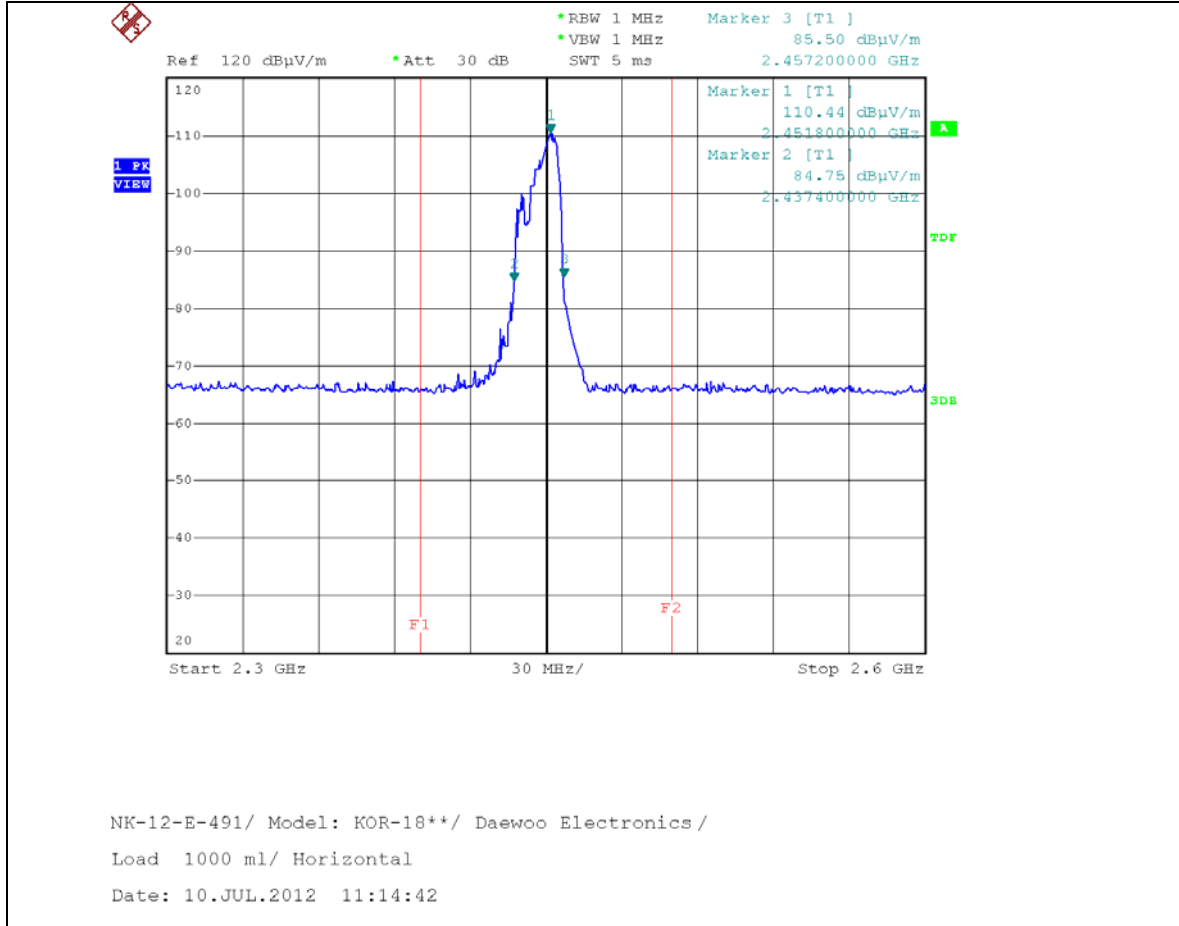

Horizontal (120 V, 1000 ml)

PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

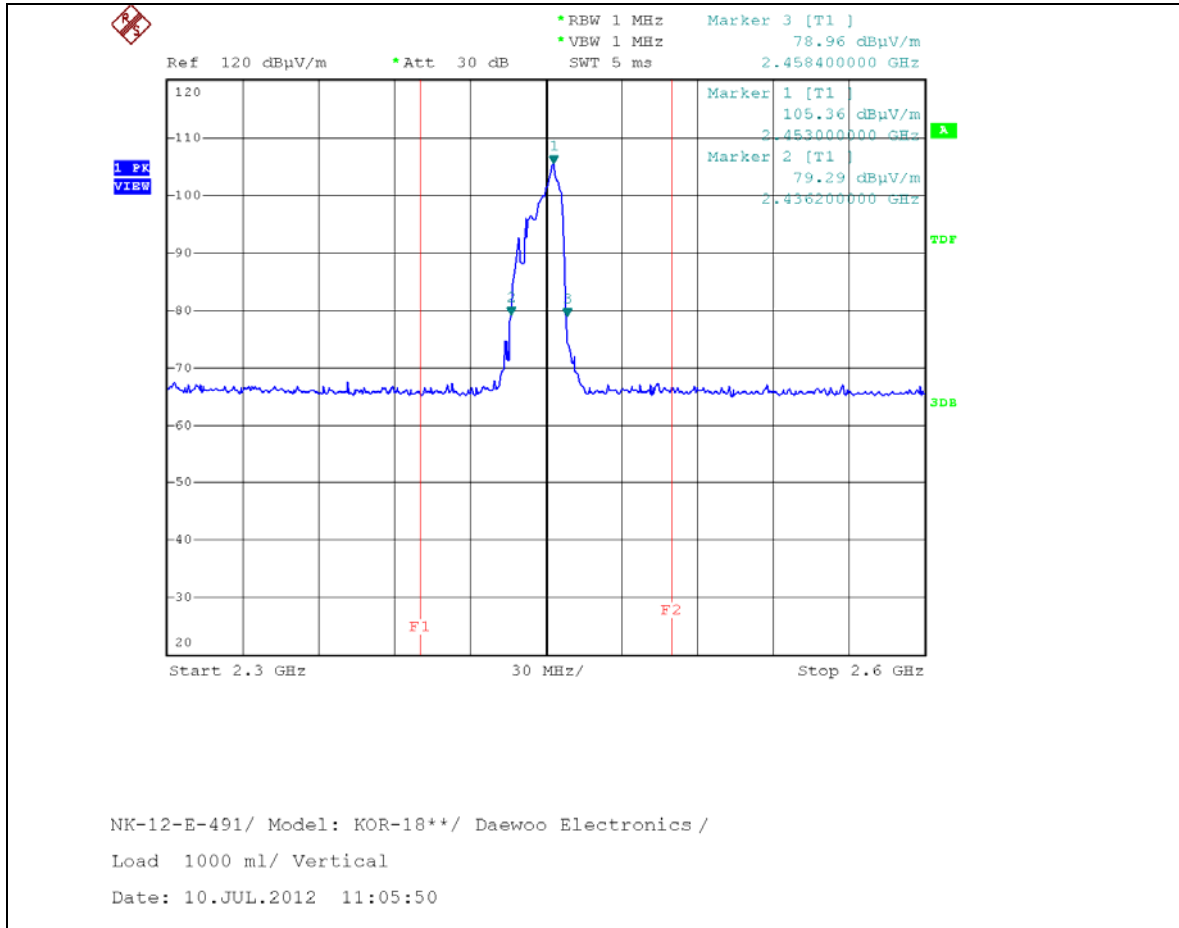

Vertical (120 V, 1000 ml)


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port (Line)

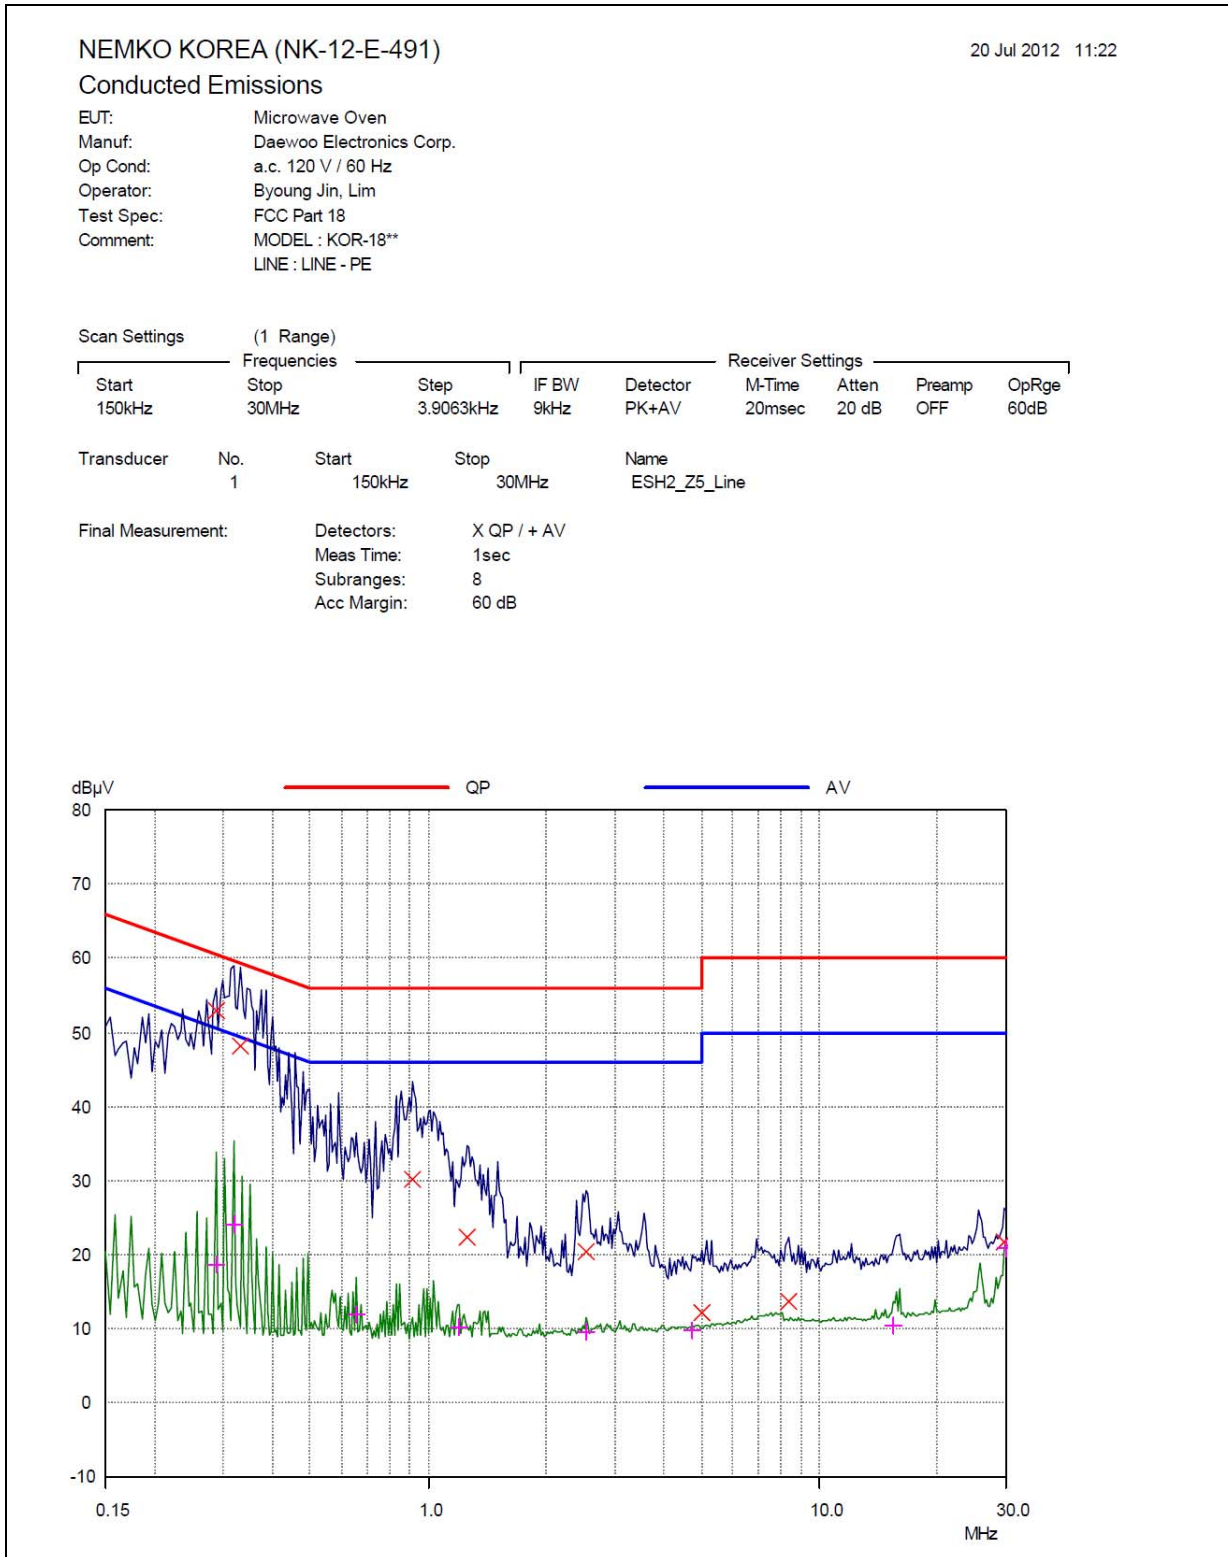


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port (Neutral)

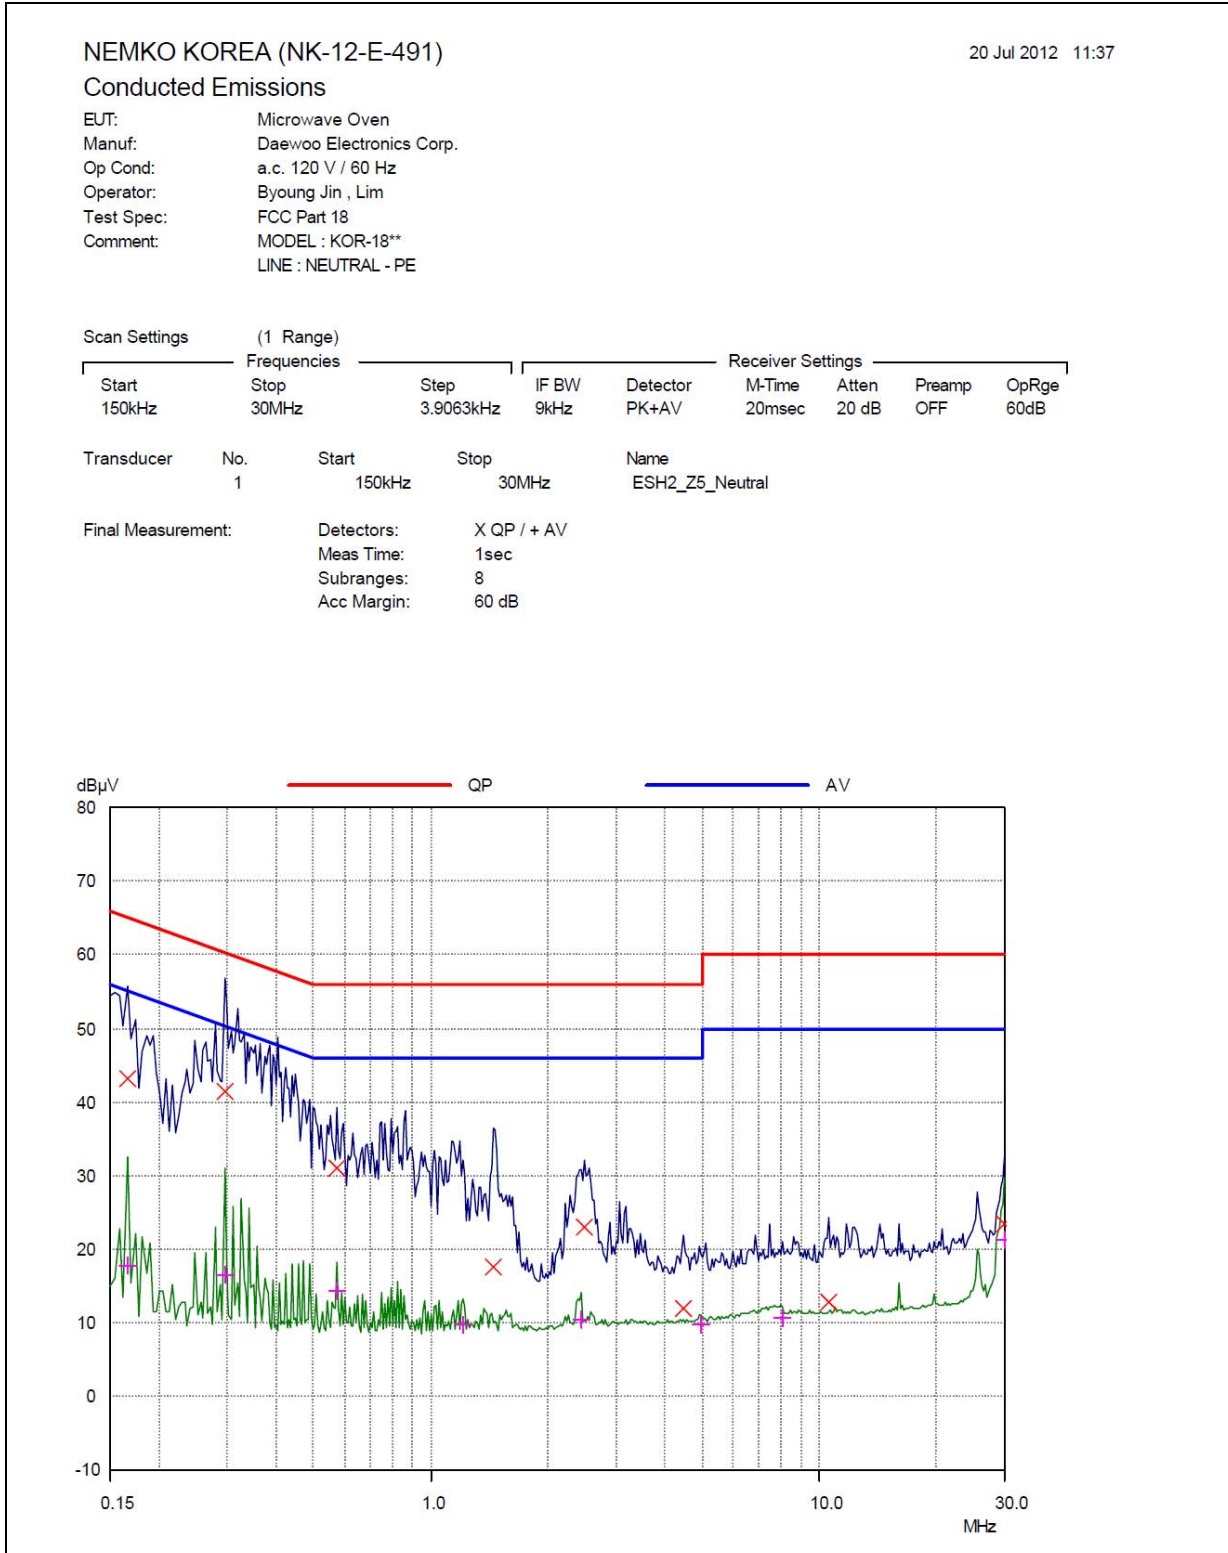

PLOTS OF EMISSIONS

- Radiated Emission (0.15 MHz ~ 30 MHz)**

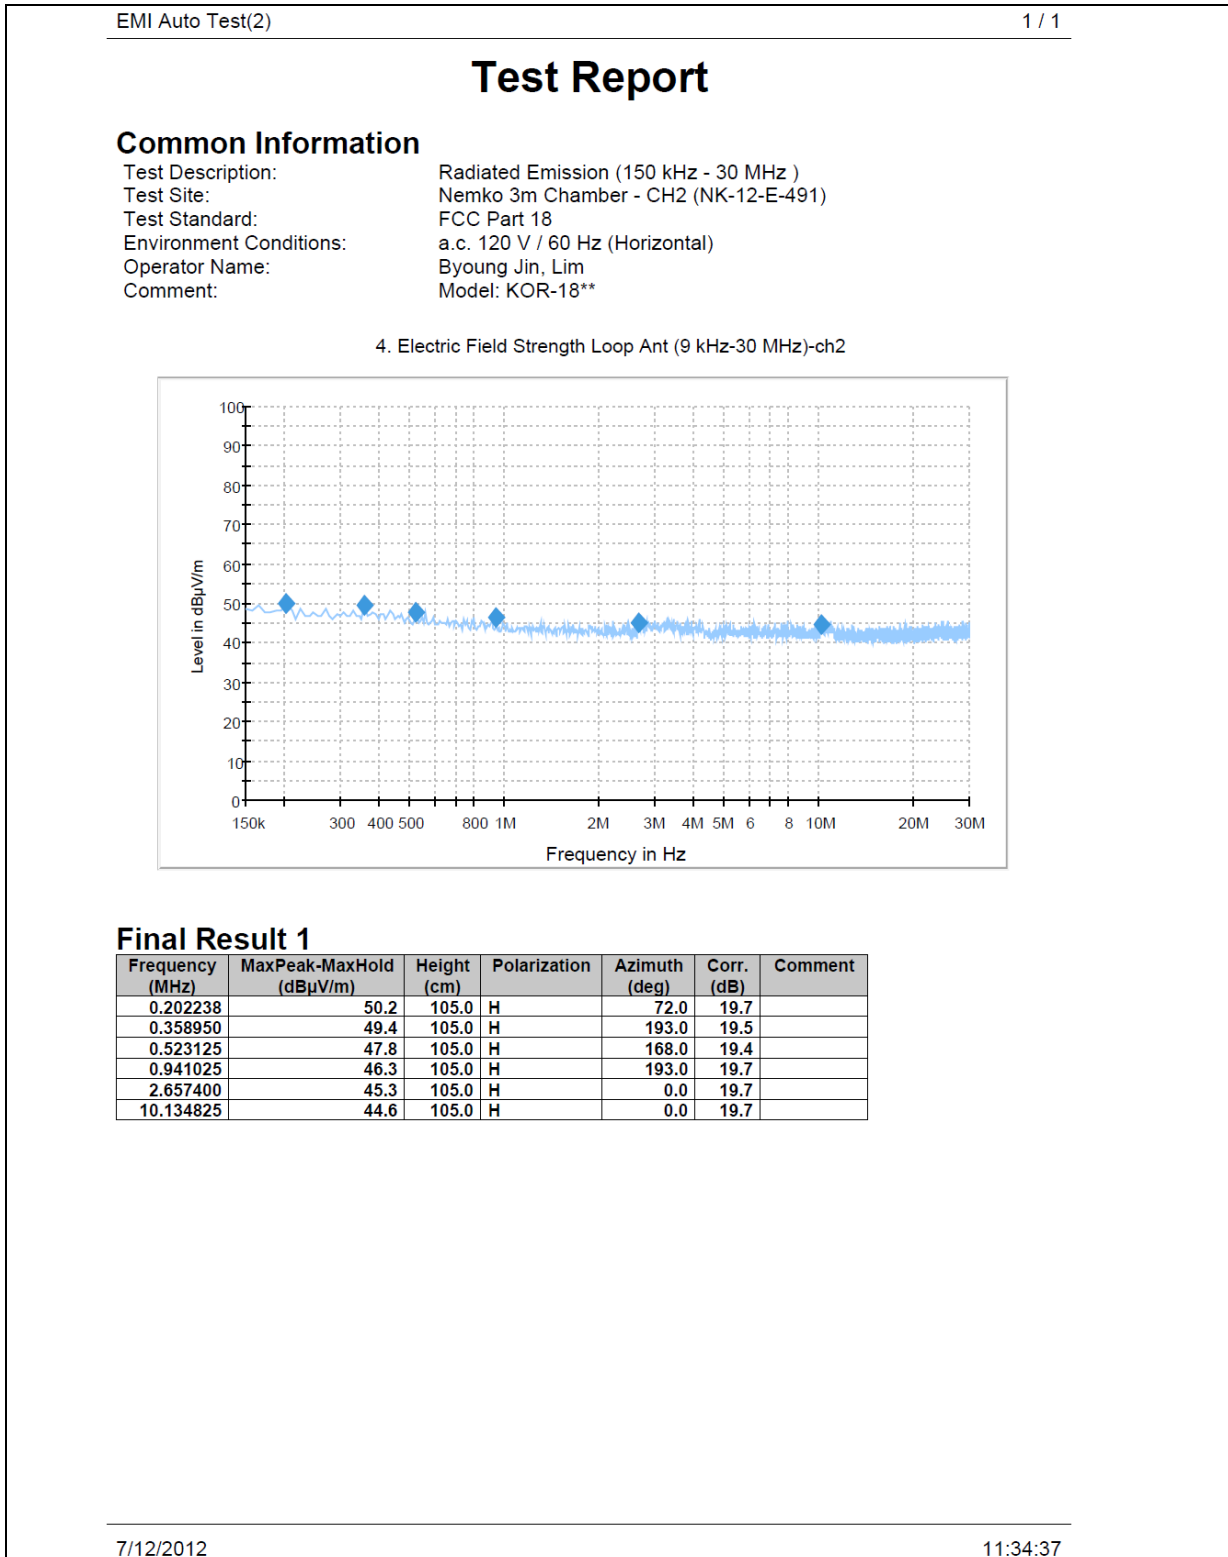

(Horizontal)

PLOTS OF EMISSIONS

- Radiated Emission (0.15 MHz ~ 30 MHz)**


EMI Auto Test(2)
1 / 1

Test Report

Common Information

Test Description:	Radiated Emission (150 kHz - 30 MHz)
Test Site:	Nemko 3m Chamber - CH2 (NK-12-E-491)
Test Standard:	FCC Part 18
Environment Conditions:	a.c. 120 V / 60 Hz (Vertical)
Operator Name:	Byoung Jin, Lim
Comment:	Model: KOR-18**

4. Electric Field Strength Loop Ant (9 kHz-30 MHz)-ch2

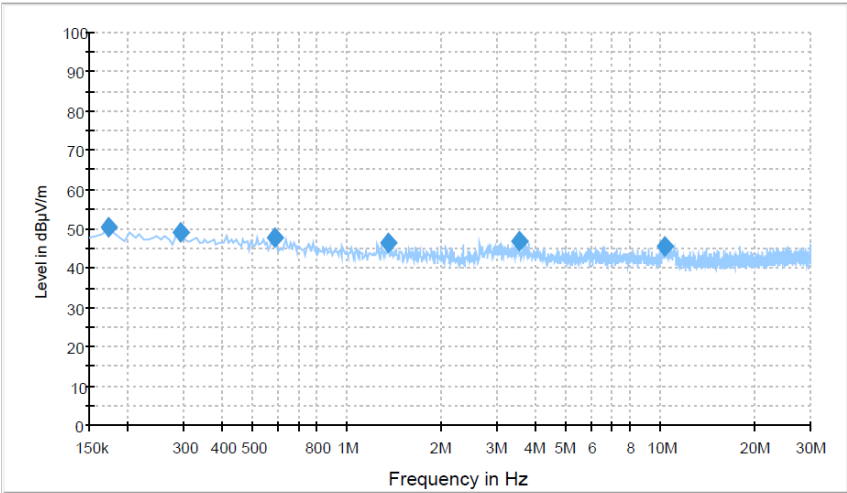

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
0.172388	50.6	105.0	V	78.0	19.8	
0.291788	49.0	105.0	V	176.0	19.5	
0.582825	47.6	105.0	V	345.0	19.5	
1.351463	46.6	105.0	V	249.0	19.7	
3.537975	47.1	105.0	V	28.0	19.7	
10.299000	45.5	105.0	V	201.0	19.7	

7/12/2012
11:45:21

(Vertical)

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95 %

1. Conducted Uncertainty Calculation

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	R_i	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Attenuation AMN- Receiver	L_c	± 1.00	normal 2	2.00	0.50	1	0.50
AMN Voltage division factor	L_{AMN}	± 0.09	rectangular	$\sqrt{3}$	0.05	1	0.05
Sine wave voltage	dV_{SW}	± 0.17	rectangular	$\sqrt{3}$	0.10	1	0.10
Pulse amplitude response	dV_{PA}	± 0.92	rectangular	$\sqrt{3}$	0.53	1	0.53
Pulse repetition rate response	dV_{PR}	± 0.35	rectangular	$\sqrt{3}$	0.20	1	0.20
Noise floor proximity	dV_{NF}	± 0.00			0.00	1	0.00
AMN Impedance	dZ	± 2.0	rectangular	$\sqrt{3}$	1.15	1	1.15
Ⓐ Mismatch	M	+0.70	U-Shaped	$\sqrt{2}$	0.49	1	0.49
Ⓑ Mismatch	M	-0.80	U-Shaped	$\sqrt{2}$	-0.56	1	-0.56
Measurement System Repeatability	R_s	0.05	normal 1	1.00	0.05	1	0.05
Remark	Ⓐ: AMN-Receiver Mismatch : + Ⓑ: AMN-Receiver Mismatch : -						
Combined Standard Uncertainty	Normal			Mismatch + 0.70, $u_c = 1.86$ dB Mismatch - 0.80, $u_c = 1.88$ dB			
Expanded Uncertainty U	Normal ($k = 2$)			$U = \pm 3.0$ dB (CL is 95 %)			

2. Radiation Uncertainty Calculation (Below 1 GHz)

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	R_i	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Sine wave voltage	dV_{sw}	± 0.17	rectangular	$\sqrt{3}$	0.10	1	0.10
Pulse amplitude response	dV_{pa}	± 0.92	rectangular	$\sqrt{3}$	0.53	1	0.53
Pulse repetition rate response	dV_{pr}	± 0.35	rectangular	$\sqrt{3}$	0.20	1	0.20
Noise floor proximity	dV_{nf}	± 0.50	normal 2	2.00	0.25	1	0.25
Antenna Factor Calibration	A_F	± 2.0	rectangular	$\sqrt{3}$	1.15	1	1.15
Cable Loss	C_L	± 1.00	normal 2	2.00	0.50	1	0.50
Antenna Directivity	A_D	± 1.00	rectangular	$\sqrt{3}$	0.58	1	0.58
Antenna Factor Height Dependence	A_H	± 0.50	rectangular	$\sqrt{3}$	0.29	1	0.29
Antenna Phase Centre Variation	A_P	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Antenna Factor Frequency Interpolation	A_I	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Site Imperfections	S_I	± 4.00	triangular	$\sqrt{6}$	1.63	1	1.63
Measurement Distance Variation	D_V	± 0.10	rectangular	$\sqrt{3}$	0.06	1	0.06
Antenna Balance	D_{bal}	± 0.90	rectangular	$\sqrt{3}$	0.52	1	0.52
Cross Polarization	D_{Cross}	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Ⓐ Mismatch	M	+0.26	U-Shaped	$\sqrt{2}$	0.18	1	0.18
Ⓑ Mismatch	M	-0.26	U-Shaped	$\sqrt{2}$	-0.18	1	-0.18
Ⓒ Mismatch	M	+0.98	U-Shaped	$\sqrt{2}$	0.69	1	0.69
Ⓓ Mismatch	M	-1.11	U-Shaped	$\sqrt{2}$	-0.78	1	-0.79
Measurement System Repeatability	R_S	0.09	normal 1	1.00	0.09	1	0.09

Remark	Ⓐ: Antenna-receiver Mismatch : + 일 때 (< 200 MHz) Ⓑ: Antenna-receiver Mismatch : - 일 때 (< 200 MHz) Ⓒ: Antenna-receiver Mismatch : + 일 때 (\geq 200 MHz) Ⓓ: Antenna-receiver Mismatch : - 일 때 (\geq 200 MHz)	
Combined Standard Uncertainty	Normal	$< 200 \text{ MHz } U$ Mismatch + 0.26, $uc = 2.33 \text{ dB}$ Mismatch - 0.26, $uc = 2.33 \text{ dB}$ $\geq 200 \text{ MHz } U$ Mismatch + 0.98, $uc = 2.42 \text{ dB}$ Mismatch - 1.11, $uc = 2.45 \text{ dB}$
Expanded Uncertainty U	Normal ($k = 2$)	$U = \pm 4.9 \text{ dB}$ (CL is 95 %)

3. Radiation Uncertainty Calculation (Above 1 GHz)

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	R_i	± 0.58	rectangular	$\sqrt{3}$	0.33	1	0.33
Sine wave voltage	dV_{sw}	± 0.13	rectangular	$\sqrt{3}$	0.08	1	0.08
Pulse amplitude response	dV_{pa}	± 0.12	rectangular	$\sqrt{3}$	0.07	1	0.07
Pulse repetition rate response	dV_{pr}	± 0.13	rectangular	$\sqrt{3}$	0.08	1	0.08
Noise floor proximity	dV_{nf}	± 0.50	normal 2	2.00	0.25	1	0.25
Antenna Factor Calibration	A_F	± 1.50	rectangular	$\sqrt{3}$	0.87	1	0.87
Cable Loss	C_L	± 1.00	normal 2	2.00	0.50	1	0.50
Antenna Directivity	A_D	± 1.00	rectangular	$\sqrt{3}$	0.58	1	0.58
Antenna Factor Height Dependence	A_H	± 0.40	rectangular	$\sqrt{3}$	0.23	1	0.23
Antenna Phase Centre Variation	A_P	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Antenna Factor Frequency Interpolation	A_I	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Site Imperfections	S_I	± 4.00	triangular	$\sqrt{6}$	1.63	1	1.63
Measurement Distance Variation	D_V	± 0.50	rectangular	$\sqrt{3}$	0.29	1	0.29
Antenna Balance	D_{bal}	± 1.00	rectangular	$\sqrt{3}$	0.58	1	0.58
Cross Polarization	D_{cross}	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Frequency step error	F_{STEP}	± 0.49	rectangular	$\sqrt{3}$	0.28	1	0.28
Mismatch (+)	M	+ 0.98	U-Shaped	$\sqrt{2}$	0.69	1	0.69
Mismatch (-)	M	-1.11	U-Shaped	$\sqrt{2}$	-0.78	1	-0.78
Measurement System Repeatability	R_S	± 0.36	normal 1	1.00	0.36	1	0.36

Remark	Mismatch Receiver VRC : 0.3 Antenna + Cable VRC : 0.4	
Combined Standard Uncertainty	Normal	Mismatch + 0.98, $u_c = 2.28$ dB Mismatch - 1.11, $u_c = 2.31$ dB
Expanded Uncertainty U	Normal ($k = 2$)	$U = \pm 4.6$ dB (CL is 95 %)

LIST OF TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Calibration Date	Calibration Interval
1	Test Receiver	R&S	ESCS 30	833364/020	Jan. 12 2012	1 year
2	Test Receiver	R&S	ESCS 30	100302	Oct. 12 2011	1 year
3	Signal Conditioning Unit	R&S	SCU 01	10029	Apr. 05 2012	1 year
4	Amplifier	Sonoma Instrument	310N	291916	July 16 2011	1 year
5	Pre Amplifier	HP	8449B	3008A00107	Jan. 13 2012	1 year
6	Spectrum Analyzer	R&S	FSP40	10036	July 17 2012	1 year
	Spectrum Analyzer	R&S	FSL3	101732	Apr. 04 2012	1 year
7	Microwave Survey Meter	ETS-LINDGEN	HI-1801	33549	Mar. 05 2012	2 years
8	Loop Antenna	R&S	HFH2-Z2	N/A	Feb. 21 2012	2 years
9	Biconical Log Antenna	ARA	LPB-2520/A	1180	Apr. 14 2012	2 years
10	Trilog-Broadband Test Antenna	SCHWARZBECK	VULB 9163	9163-454	Feb. 24 2012	2 years
11	Double Ridged Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-508	Dec. 24 2010	2 years
12	LISN	R&S	ESH2-Z5	100227	Apr. 04 2012	1 year
13	Position Controller	DAEIL EMC	N/A	N/A	N/A	N/A
14	Turn Table	DAEIL EMC	N/A	N/A	N/A	N/A
15	Antenna Mast	DAEIL EMC	N/A	N/A	N/A	N/A
16	Anechoic Chamber	EM Eng.	N/A	N/A	N/A	N/A
17	Shielded Room	EM Eng.	N/A	N/A	N/A	N/A
18	Anechoic Chamber	SY Corporation	N/A	N/A	N/A	N/A

APPENDIX D – SCHEMATIC DIAGRAM

APPENDIX E – USER’S MANUAL

APPENDIX F – BLOCK DIAGRAM
