

## Nemko Korea Co., Ltd.

155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 KOREA, REPUBLIC OF  
TEL : + 82 31 330 1700 FAX : + 82 31 322 2332

### FCC EVALUATION REPORT FOR CERTIFICATION

**Applicant :**

Dongbu Daewoo Electronics Corporation  
(Cheongcheon-dong), 12, Bupyeongbuk-ro  
236 beon-gil, Bupyeong-gu, Incheon,  
Korea, Republic of  
Attn : Mr. Byung-Seok, Kim

Dates of Issue : January 18, 2016  
Test Report No. : NK-15-E-0793  
Test Site : Nemko Korea Co., Ltd.  
EMC site, Korea

FCC ID

**C5F7NF1BMO100N**

Trade Mark

*DAEWOO, Magic Chef*

Contact Person

Dongbu Daewoo Electronics Corporation  
(Cheongcheon-dong), 12, Bupyeongbuk-ro  
236 beon-gil, Bupyeong-gu, Incheon, Korea, Republic of  
Mr. Byung-Seok, Kim  
Telephone No. : + 82 32 510 7919

Applied Standard : FCC Part 18 & Part 2  
Classification : Consumer ISM equipment  
EUT Type : Microwave oven

The device bearing the Trade Mark and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in MP-5:1986.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



January 18, 2016

Tested By : Doseung Shin  
Engineer



Jan. 18, 2016

Reviewed By : Changsoo Choi  
Technical Manager

# TABLE OF CONTENTS

---

<b>SCOPE</b>	<b>3</b>
<b>INTRODUCTION (Site Description)</b>	<b>4</b>
<b>EUT INFORMATION</b>	<b>5</b>
<b>DESCRIPTION OF TESTS (Radiation Hazard)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (Input Power Measurement)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (RF Output Power Measurement)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (Operating Frequency Measurements)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (Conducted Emissions)</b>	<b>7</b>
<b>DESCRIPTION OF TESTS (Radiated Emissions)</b>	<b>8</b>
<b>TEST DATA (Radiation Hazard)</b>	<b>9</b>
<b>TEST DATA (Input Power Measurement)</b>	<b>9</b>
<b>TEST DATA (RF Output Power Measurement)</b>	<b>9</b>
<b>TEST DATA (Operating Frequency Measurements)</b>	<b>11</b>
<b>TEST DATA (Conducted Emissions)</b>	<b>13</b>
<b>TEST DATA (Radiated Emissions)</b>	<b>16</b>
<b>PLOT OF EMISSIONS (Operating Frequency Measurements)</b>	<b>22</b>
<b>ACCURACY OF MEASUREMENT</b>	<b>42</b>
<b>LIST OF TEST EQUIPMENT</b>	<b>45</b>
<b>APPENDIX A - SAMPLE LABEL</b>	<b>46</b>
<b>APPENDIX B - PHOTOGRAPHS OF TEST SET-UP</b>	<b>47</b>
<b>APPENDIX C - EUT PHOTOGRAPHS</b>	<b>52</b>
<b>APPENDIX D - SCHEMATIC DIAGRAM</b>	<b>70</b>
<b>APPENDIX E - USER'S MANUAL</b>	<b>71</b>
<b>APPENDIX F - BLOCK DIAGRAM</b>	<b>72</b>

## SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 18.

**Responsible Party :** Dongbu Daewoo Electronics Corporation

**Contact Person :** Mr. Byung-Seok, Kim  
Tel No.: + 82 32 510 7919

**Manufacturer :** Dongbu Daewoo Electronics Corporation  
(Cheongcheon-dong), 12, Bupyeongbuk-ro 236 beon-gil,  
Bupyeong-gu, Incheon, Korea, Republic of

**Factory :** Dongbu Daewoo Microwave ovens (Tianjin) Co., Ltd.  
NO. 34, CHANGHWA STREET, DAGANG DEVELOPMENT AREA  
BINHAI NEW DISTRICT, TIANJIN, 300270 CHINA

- FCC ID: C5F7NF1BMO100N
- Model: <sup>1)</sup> KOR-1B\*\*  
Note 1) First “\*\*” : 0~9 or A~Z (Enclosure design difference)  
Note 2) Second “\*\*” : 0~9 (Mechanical type) or A~Z (Electronic type)
- Variant Model: <sup>2)</sup> MCD1310ST, <sup>2)</sup> MCD1311ST
- Trade Mark: <sup>1)</sup> DAEWOO, <sup>2)</sup> Magic Chef
- EUT Type: Microwave oven
- Applied Standard: FCC Part 18 & Part 2
- Test Procedure(s): MP-5:1986
- Dates of Test: December 15, 2015 to January 15, 2015
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK-15-E-0793

## INTRODUCTION

---

The measurement procedure described in MP5:1986 for Methods of Measurement of radiated, powerline conducted radio noise, frequency and power output was used in determining emissions emanating from **Dongbu Daewoo Electronics Corporation**  
FCC ID : **C5F7NF1BMO1ØØN, Microwave oven.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory.**  
The site address is 155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do  
16885 KOREA, REPUBLIC OF

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

The Nemko Korea Co., Ltd. has been accredited as a Conformity Assessment Body (CAB).



Nemko Korea Co., Ltd.  
155 & 159, Osan-Ro, Mohyeon-Myeon,  
Cheoin-Gu, Yongin-Si, Gyeonggi-Do  
16885 KOREA, REPUBLIC OF  
Tel) + 82 31 330 1700  
Fax) + 82 31 322 2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.  
The map also shows Nemko Korea Corporation Ltd. EMC Lab and Incheon Airport.

## ***EUT INFORMATION***

---

### **EUT Information**

Intended use	Household
Type of appliance	Counter-top Type
Rated voltage & frequency	a.c. 120 V, 60 Hz Single Phase
Rated power output	1 000 W
Rated power consumption	1 500 W
Magnetron	RM259 (DAEWOO)

### **Component List**

<b>Item</b>	<b>Model</b>	<b>Manufacturer</b>	<b>Serial Number</b>
Diode H.V.	CL01-12	GAOXING	N/A
Fan Motor	OEM-15DWX1-C07	OH SUNG	N/A
H.V. CAPACITOR	2100V	NINGBO	N/A
Noise Filter	DWLF-M30	N/A	N/A
Magnetron	RM259	DAEWOO	151217CD JF
Main Board	M158	DAEWOO	3514315410-6 (3514334920)
SYNCHRONOUS MOTOR	49TYD-16A1	Yuyao Yahua Mechanical&Electrical Co.,Ltd	N/A
Trans H.V.	DJAS10A0-1BA	SHANDONG JUNFENG ELECTRONIC	N/A

## ***DESCRIPTION OF TESTS***

---

### **Radiation Hazard**

A 700 ml water load was placed in the center of the oven.

The power setting was set to maximum power.

While the oven was operating, the Microwave Survey Meter probe was moved slowly around the door seams to check for leakage.

### **Input Power Measurement**

A 700 ml water load was placed in the center of the oven and the oven set to maximum power. A 700 ml water load was chosen for its compatibility.

Input power and current were measured using a Power Analyzer.

Manufacturers to determine their input ratings commonly use this procedure.

### **Output Power Measurement**

The Caloric Method was used to determine maximum output power.

The initial temperature of a 1000 ml water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 47 seconds. Then the temperature of the water re-measured.

### **Frequency Measurements**

Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 percent to 125 percent of the nominal rating.

And the load quantity was reduced by evaporation to approximately 20 % of the original quantity with nominal rating.

## DESCRIPTION OF TESTS

### Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 m shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 0.5 m away from the side of wall of the shielded room Rohde & Schwarz (ESH2-Z5) of the 50 ohm / 50 uH Line Impedance Stabilization Network(LISN) is bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz (ESH2-Z5) LISN.

Power to the LISN s are filtered by high-current high insertion loss power line filters.

The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ”.

If d.c. power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 m were shortened by non-inductive bundling (serpentine fashion) to a 1 m length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 20 ms sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCI).

The detector functions were set to quasi-peak mode & average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux a.c. outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

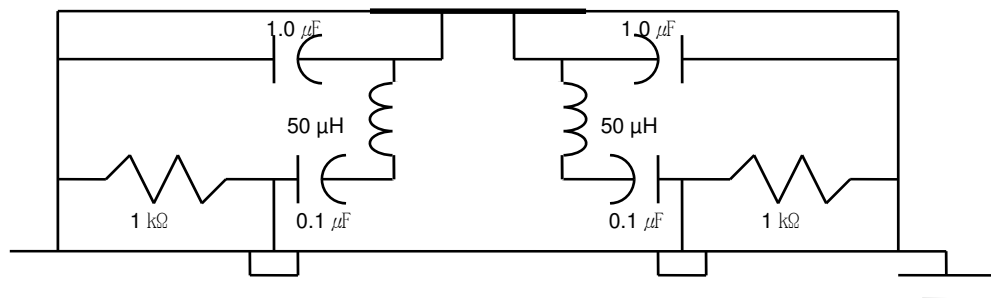


Fig. 2. LISN Schematic Diagram

## DESCRIPTION OF TESTS

### Radiated Emissions

Measurements were made indoors at 10 m & 3 m using antenna, signal conditioning unit and EMI test receiver to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was noted for each frequency found.

The spectrum was scanned from 0.15 MHz to 30 MHz using Loop Antenna (R&S/HFH2-Z2) and from 30 MHz to 1000 MHz using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163).

Above 1 GHz, Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) was used.

Final Measurements were made indoors at 3 m using Loop Antenna (R&S/HFH2-Z2) for measurement from 0.15 to 30 MHz with RBW 9 kHz & VBW 9 kHz and made indoors at 10 m using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163) for measurement from 30 MHz to 1000 MHz with RBW 100 kHz & VBW 100 kHz and made indoors at 3 m using Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) for measurement from 1 GHz to 18 GHz with RBW 1 MHz & VBW 10 Hz.

The detector function were set to quasi peak mode and the bandwidth of the receiver were set to 9 kHz, 100 kHz and peak mode 1 MHz depending on the frequency or type of signal.

The Double Ridged Broadband Horn antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re-configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The EUT is rotated about its vertical axis on the turntable, and the polarization and height of the receiving antenna are varied to obtain the highest field strength on the particular frequency under observation.

Each EME reported was calibrated using the R/S signal generator.

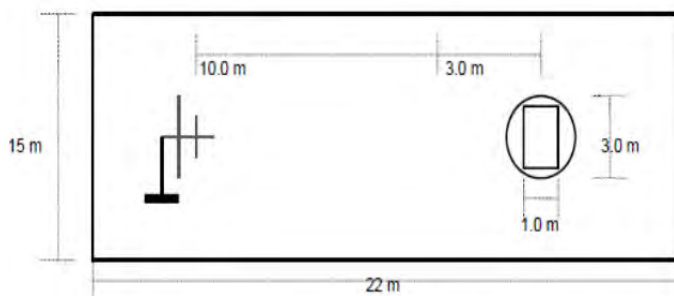


Fig. 3. Dimensions of 10 semi anechoic chamber

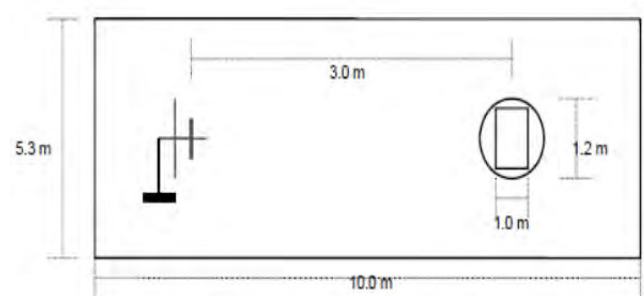


Fig. 4. Dimensions of 3 m full anechoic chamber



## TEST DATA

---

### Radiation Hazard

Probe Location	Maximum Leakage [mW/Cm2]	Limit [mW/Cm2]
A	0.3	1.00
B	0.2	1.00
C	0.2	1.00
All others	0.1	1.00

### Input Power Measurement

Operation mode	P rated (W)	P (W)	dP (%)	Required dP (%)
Power Input	1 500	1 560	4	+ 15 %

### RF Output Power Measurement

Quantity of Water [ml]	Starting Temperature [Centigrade]	Final Temperature [Centigrade]	Temp. Rise	Elapsed Time [seconds]	RF Power [watts]
1 000	10	19.9	9.9	42	987

$$\text{RF Power} = \frac{(4.187 \text{ Joules/Cal}) \times (\text{Volume in ml}) \times (\text{Temp. Rise})}{\text{Time in seconds}}$$



Tested by : **Doseung Shin**

## TEST DATA

### Operating Frequency measurements

#### ► Frequency vs Line Voltage Variation Test

[Room Temperature : 18.9 °C]

Line Voltage Variation (a.c. V)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
96	H	Lower : 2 427.2	Lower : 2 400 MHz Upper : 2 500 MHz
	H	Upper : 2 471.0	
	V	Lower : 2 429.0	
	V	Upper : 2 471.0	
108	H	Lower : 2 432.0	
	H	Upper : 2 468.6	
	V	Lower : 2 431.4	
	V	Upper : 2 469.8	
120	H	Lower : 2 426.6	
	H	Upper : 2 471.0	
	V	Lower : 2 430.2	
	V	Upper : 2 471.0	
132	H	Lower : 2 420.6	
	H	Upper : 2 474.6	
	V	Lower : 2 426.6	
	V	Upper : 2 474.6	
150	H	Lower : 2 441.6	
	H	Upper : 2 466.2	
	V	Lower : 2 447.0	
	V	Upper : 2 468.0	

#### NOTE :

1. \*Pol. H = Horizontal V = Vertical
2. Initial load : 1 000 ml of water in the beaker.
3. Line voltage varied from a.c. 96 V to a.c. 150 V.
4. ISM Frequency : 2 450 MHz, Tolerance : ± 50 MHz

**RESULT : Pass**



Tested by : **Doseung Shin**

## TEST DATA

► Frequency vs Load Variation Test

[Room Temperature : 19.3 °C]

Volume of water (ml)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
200	H	Lower : 2 433.8	Lower : 2 400 MHz Upper : 2 500 MHz
	H	Upper : 2 475.8	
	V	Lower : 2 421.8	
	V	Upper : 2 477.0	
400	H	Lower : 2 436.2	
	H	Upper : 2 477.6	
	V	Lower : 2 438.6	
	V	Upper : 2 474.0	
600	H	Lower : 2 427.2	
	H	Upper : 2 475.2	
	V	Lower : 2 420.6	
	V	Upper : 2 475.8	
800	H	Lower : 2 433.8	
	H	Upper : 2 469.2	
	V	Lower : 2 435.6	
	V	Upper : 2 466.2	
1000	H	Lower : 2 424.8	
	H	Upper : 2 467.4	
	V	Lower : 2 419.4	
	V	Upper : 2 471.0	

**NOTE :**

1. \*Pol. H = Horizontal, V = Vertical
2. The water load was varied between 200 ml to 1 000 ml.
3. Frequency was measured by using nominal voltage (a.c. 120 V).
4. ISM Frequency : 2 450 MHz, Tolerance : ± 50 MHz

**RESULT : Pass**



Tested by : **Doseung Shin**

# TEST DATA

## Conducted Emissions

FCC ID : C5F7NF1BMO100N

[Room Temperature : 15.4 °C]

EMI Auto Test(1)

1 / 2


### Test Report

#### Common Information

Test Site:	Nemko Korea(NK-15-E-0793)
Test Description:	Conducted emission
Test Standard:	FCC Part 18
Environment Conditions:	a.c. 120 V, 60 Hz
Operator Name:	Doseung,Shin
	Microwave mode

#### 2.EMI Auto Test\_4-Line Voltage LISN

2.EMI Auto Test\_4-Line Voltage LISN

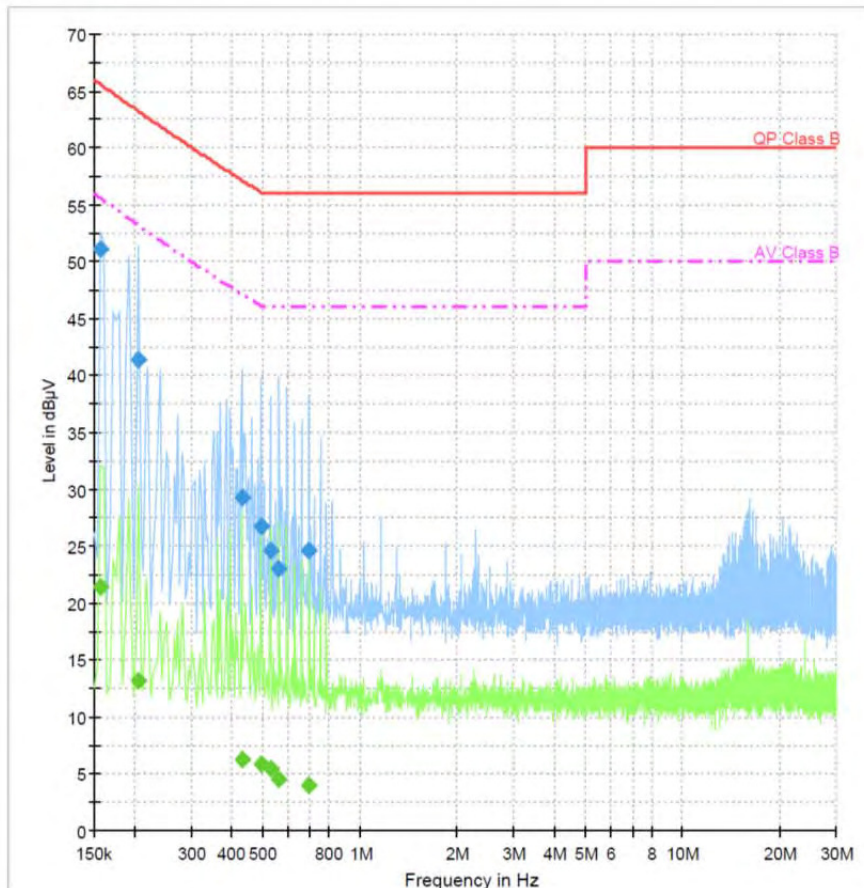

12/29/2015

EMI Auto Test(1)

2 / 2

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.157462	51.1	15000.0	9.000	GND	N	10.4	14.5	65.6	
0.205969	41.4	15000.0	9.000	GND	N	10.4	21.8	63.2	
0.429844	29.3	15000.0	9.000	GND	L1	10.4	27.8	57.2	
0.493275	26.8	15000.0	9.000	GND	N	10.4	29.3	56.1	
0.526856	24.6	15000.0	9.000	GND	L1	10.4	31.4	56.0	
0.560438	23.1	15000.0	9.000	GND	L1	10.4	32.9	56.0	
0.694762	24.7	15000.0	9.000	GND	L1	10.4	31.3	56.0	

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.157462	21.4	15000.0	9.000	GND	N	10.4	34.2	55.6	
0.205969	13.2	15000.0	9.000	GND	L1	10.4	39.9	53.2	
0.429844	6.2	15000.0	9.000	GND	L1	10.4	40.9	47.2	
0.493275	5.9	15000.0	9.000	GND	L1	10.4	40.2	46.1	
0.526856	5.5	15000.0	9.000	GND	N	10.4	40.5	46.0	
0.560438	4.6	15000.0	9.000	GND	N	10.4	41.4	46.0	
0.694762	4.0	15000.0	9.000	GND	N	10.4	42.0	46.0	

12/29/2015

**NOTES:**

1. *Measurements using quasi-peak mode & average mode.*
2. *If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.*
3. *Line : L = Line , N = Neutral*
4. *The limit for consumer device is on the FCC Part section 18.307(b).*

A handwritten signature in blue ink, appearing to be "Doseung Shin".

---


Tested by : **Doseung Shin**

# TEST DATA

## Radiated Emissions (150 kHz to 30 MHz)

FCC ID : C5F7NF1BMO1ØØN

[Room Temperature : 16.8 °C]

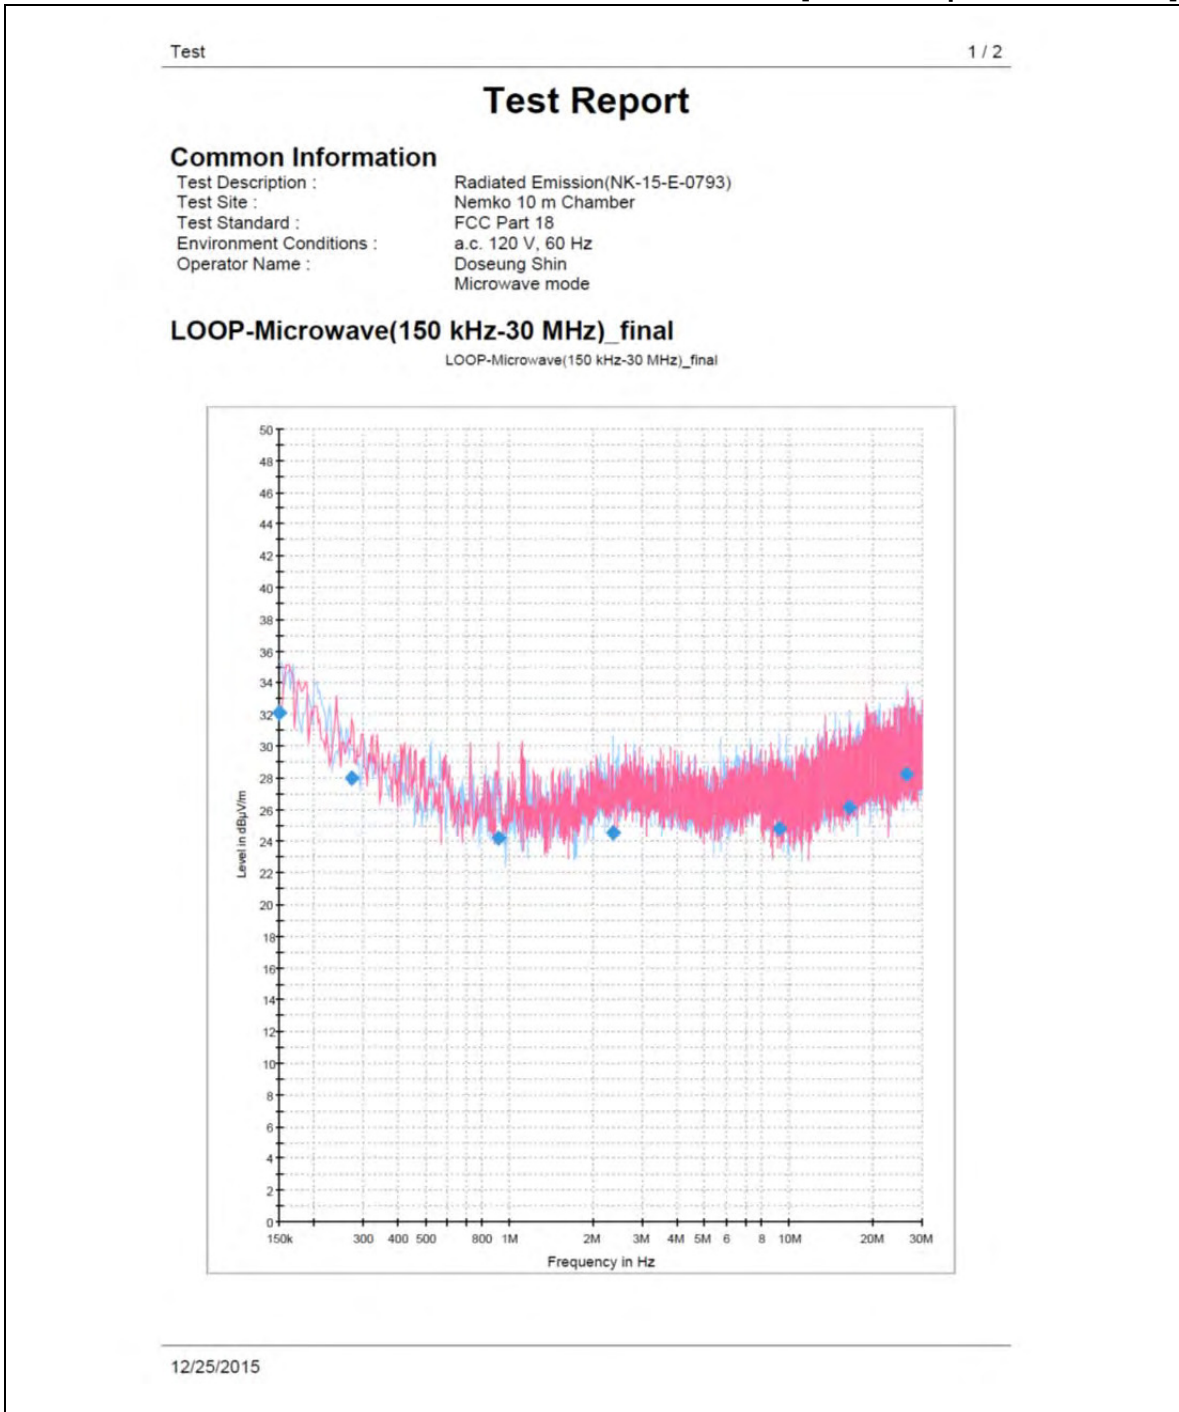

Test

2 / 2

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
0.150000	32.1	15000.0	9.000	H	123.0	-23.4	
0.272385	28.0	15000.0	9.000	V	182.0	-23.7	
0.914160	24.2	15000.0	9.000	V	345.0	-23.9	
2.343975	24.5	15000.0	9.000	H	352.0	-23.5	
9.293055	24.8	15000.0	9.000	H	296.0	-23.2	
16.573470	26.1	15000.0	9.000	H	151.0	-19.4	
26.441880	28.2	15000.0	9.000	H	352.0	-13.3	

12/25/2015

<Radiated Measurements at 3 meters>



**NOTES:**

1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor :  $20 * \log (300 / 3) = 40 \text{ dBuV/m}$
4. The limit at 300 meters is  $20 * \log (25 * \text{SQRT} (\text{RF Power} / 500))$
5. All other emissions were measured while a 700 mℓ load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.



---


Tested by : **Doseung Shin**

# TEST DATA

## Radiated Emissions (30 MHz to 1 GHz)

FCC ID : C5F7NF1BMO1ØØN

[Room Temperature : 19.2 °C]

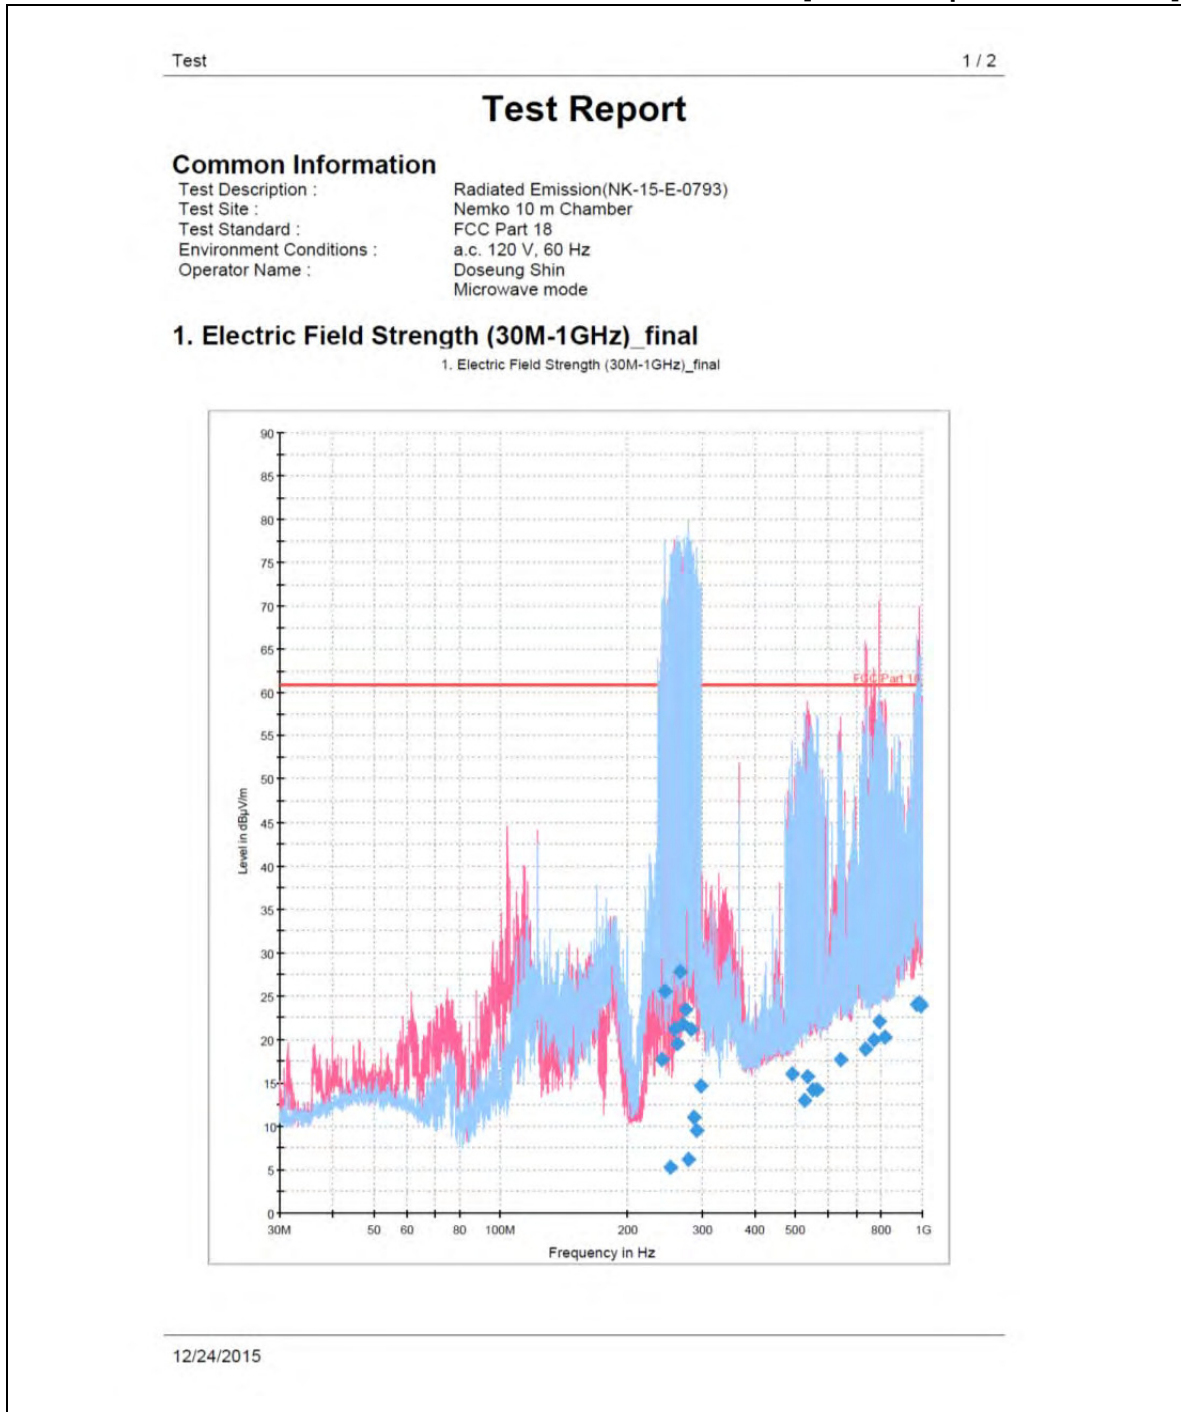

Test

2 / 2

**Final Result 1**

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
241.411500	17.7	15000.0	120.000	370.0	H	299.0	-21.7	42.7	60.4
245.340000	25.5	15000.0	120.000	370.0	H	178.0	-21.5	34.9	60.4
253.488000	5.3	15000.0	120.000	286.0	H	95.0	-21.0	55.1	60.4
258.483500	21.1	15000.0	120.000	100.0	V	313.0	-20.9	39.3	60.4
261.781500	19.6	15000.0	120.000	186.0	H	-30.0	-20.7	40.8	60.4
266.389000	27.9	15000.0	120.000	330.0	H	43.0	-20.6	32.5	60.4
270.414500	21.7	15000.0	120.000	370.0	V	276.0	-20.4	38.7	60.4
275.507000	23.5	15000.0	120.000	300.0	H	75.0	-20.2	36.9	60.4
279.096000	6.2	15000.0	120.000	186.0	H	355.0	-20.1	54.2	60.4
282.491000	21.1	15000.0	120.000	270.0	H	-30.0	-20.0	39.3	60.4
287.244000	11.1	15000.0	120.000	370.0	H	196.0	-19.9	49.3	60.4
292.045500	9.5	15000.0	120.000	270.0	H	-9.0	-19.7	50.9	60.4
299.272000	14.6	15000.0	120.000	370.0	H	320.0	-19.4	45.8	60.4
490.992500	16.0	15000.0	120.000	209.0	H	1.0	-13.6	44.4	60.4
527.610000	13.0	15000.0	120.000	170.0	H	232.0	-12.6	47.4	60.4
535.030500	15.8	15000.0	120.000	370.0	V	52.0	-12.4	44.6	60.4
552.005500	14.2	15000.0	120.000	370.0	H	159.0	-11.9	46.2	60.4
564.227500	14.2	15000.0	120.000	222.0	H	176.0	-11.6	46.2	60.4
638.093000	17.7	15000.0	120.000	370.0	V	262.0	-10.2	42.7	60.4
736.305500	18.9	15000.0	120.000	100.0	V	81.0	-8.9	41.5	60.4
767.879000	20.0	15000.0	120.000	270.0	V	250.0	-8.5	40.4	60.4
789.461500	22.0	15000.0	120.000	209.0	V	262.0	-8.2	38.4	60.4
818.464500	20.3	15000.0	120.000	270.0	V	256.0	-7.8	40.1	60.4
967.553500	24.1	15000.0	120.000	100.0	H	240.0	-6.5	36.3	60.4
982.443000	24.1	15000.0	120.000	130.0	V	333.0	-6.3	36.3	60.4
995.780500	23.9	15000.0	120.000	100.0	H	204.0	-6.1	36.5	60.4

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
241.411500	
245.340000	
253.488000	
258.483500	
261.781500	
266.389000	
270.414500	
275.507000	
279.096000	
282.491000	
287.244000	
292.045500	
299.272000	
490.992500	
527.610000	
535.030500	
552.005500	
564.227500	
638.093000	
736.305500	
767.879000	
789.461500	
818.464500	
967.553500	
982.443000	
995.780500	

12/24/2015

<Radiated Measurements at 10 meters>

**NOTES:**

1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor :  $20 * \log (300/10) \doteq 29.5 \text{ dB } \mu\text{N/m}$
4. The limit at 300 meters is  $20 * \log (25 * \text{SQRT} (\text{RF Power}/500))$
5. All other emissions were measured while a 700 mℓ load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.



---

Tested by : **Doseung Shin**

## TEST DATA

### Radiated Emissions (Above 1 GHz)

FCC ID : C5F7NF1BMO100N

[Room Temperature : (17.5 ± 1.8) °C]

Frequency (MHz)	Pol* (H/V)	Antenna Heights (cm)	Turntable Angles (°)	Reading Level (dBμV)	Total Loss** (dB)	Result at 3 m		K	Results at 300 m	Limits at 300 m
						(dBμV/m)	(μV/m)		(μV/m)	(μV/m)
2137.66	H	160	0	16.0	31.3	47.3	231.7	0.005	1.2	35.1
2193.87	V	130	315	17.0	31.5	48.5	266.1	0.005	1.3	35.1
2406.81	H	130	270	18.7	32.3	51.0	354.8	0.006	2.1	35.1
2512.99	V	190	315	12.9	32.7	45.6	190.5	0.006	1.1	35.1
4201.78	H	130	315	36.1	5.0	41.1	113.5	0.009	1.0	35.1
4918.19	V	130	45	47.4	7.5	54.9	555.9	0.01	5.6	35.1
7082.93	H	130	225	39.6	13.2	52.8	436.5	0.01	4.4	35.1
8363.66	V	160	45	37.0	15.2	52.2	407.4	0.01	4.1	35.1
10135.61	H	160	225	33.2	17.5	50.7	342.8	0.01	3.4	35.1
14808.37	H	190	0	32.0	23.9	55.9	623.7	0.01	6.2	35.1

<Radiated Measurements at 3 meters>

**NOTES:**


1. \* Pol. H =Horizontal V=Vertical
2. \*\* Total Loss = Antenna Factor + Cables Loss + Amplifier + HPF (High Pass Filter)
3. Field Strength (at 300 m) (uV/m) =  $K * 10^{[Fieldstrength\ at\ 3\ m\ (dBuV/m) / 20]}$
4. The limit at 300 meters is  $25 * SQRT (RF\ Power/500)$
5. Load for measurement of radiation on second and third harmonic : Two loads, one of 700 ml and the other of 300 ml, of water were used. Each load was tested both with the beaker located in the center of the oven and with it in the corner.
6. The test was performed at peak detector mode with average.
7. The limit for consumer device is on the FCC Part section 18.305.



Tested by : **Doseung Shin**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

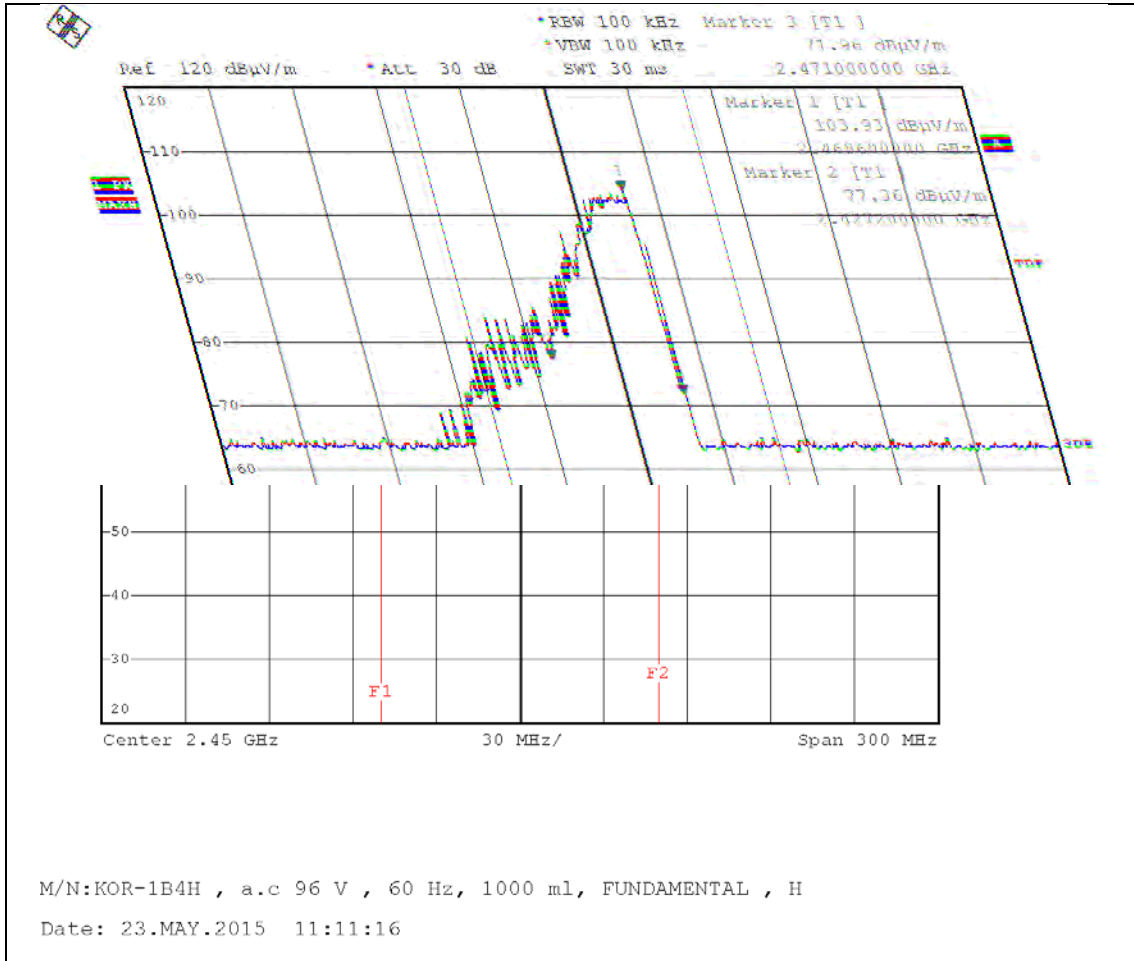

**Horizontal (96 V, 1000 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

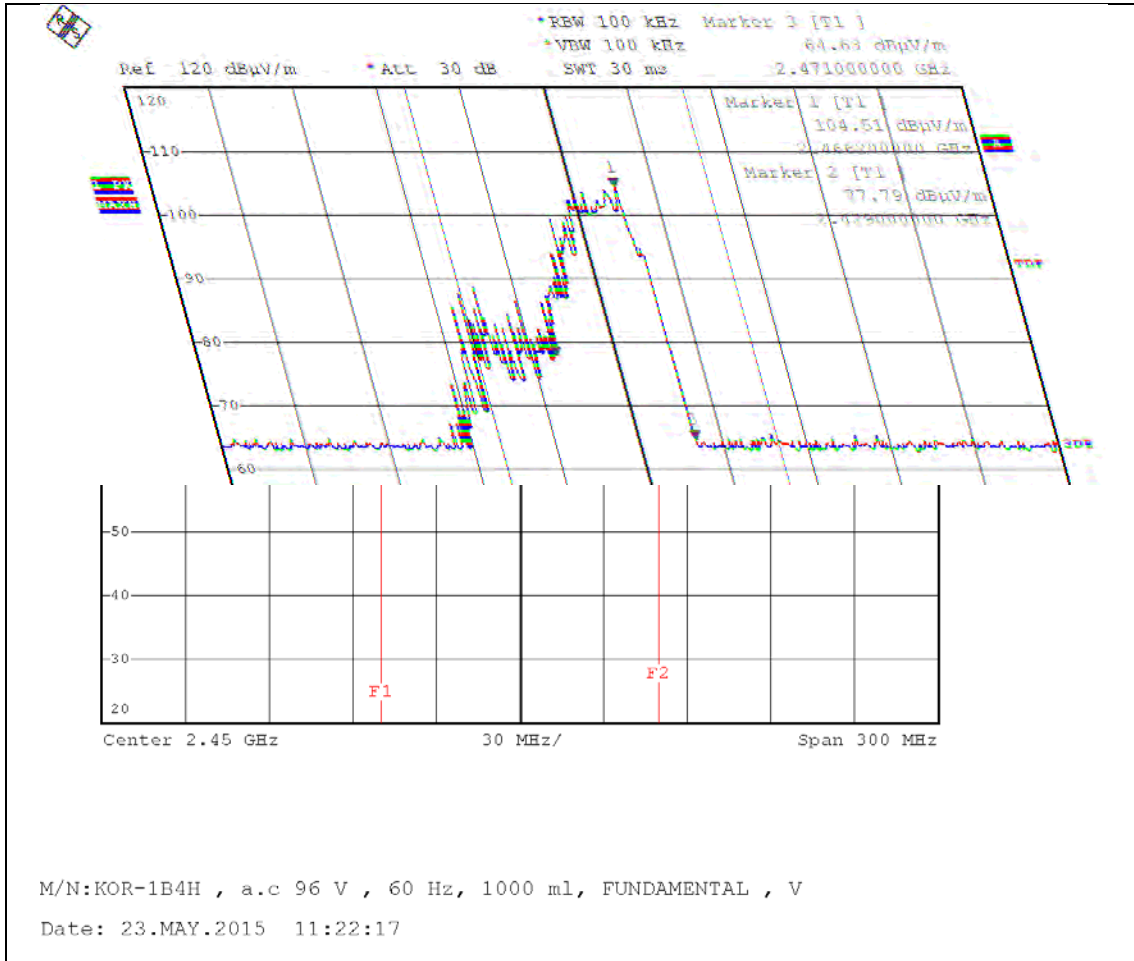

**Vertical (96 V, 1000 ml)**

# PLOTS OF EMISSIONS

- **Frequency vs Line Voltage Variation Test**

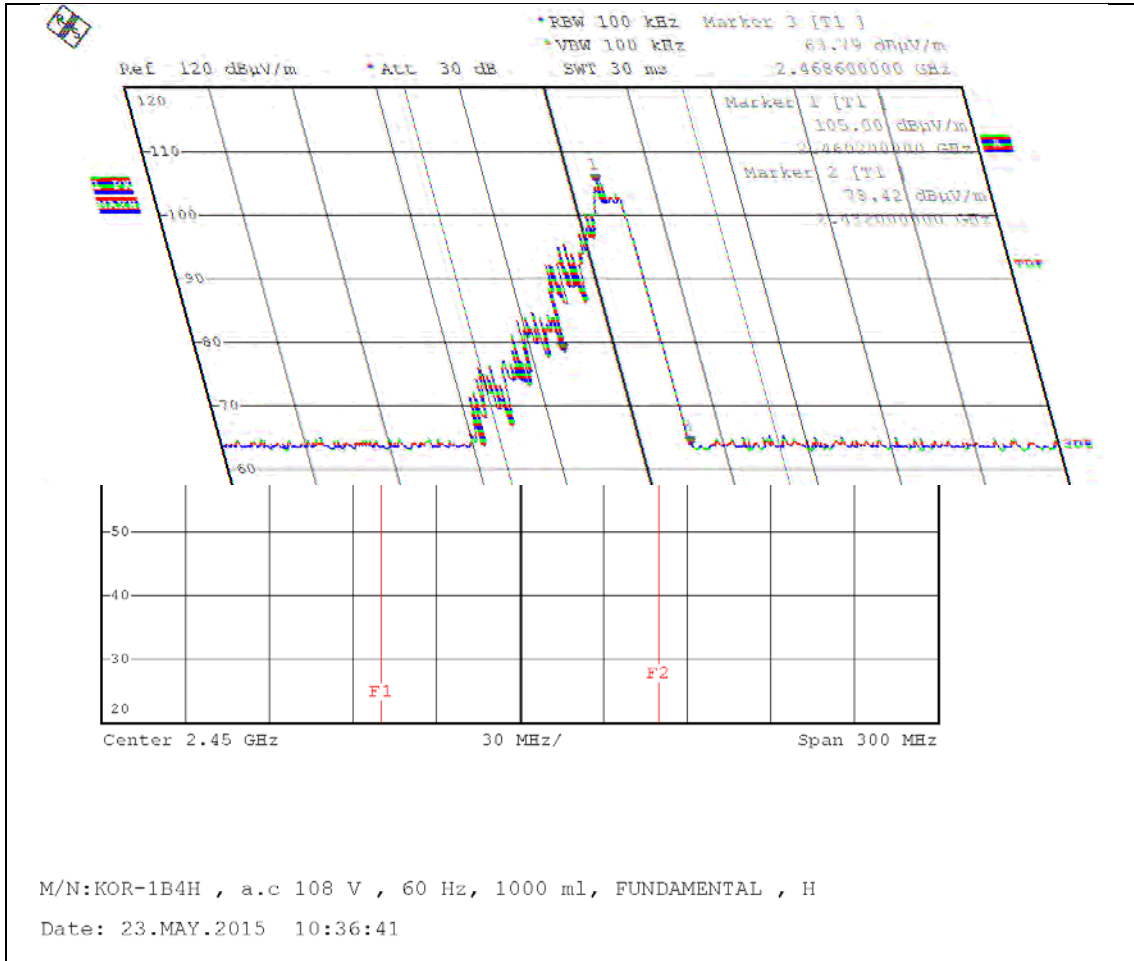


**Horizontal (108 V, 1000 ml)**



# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

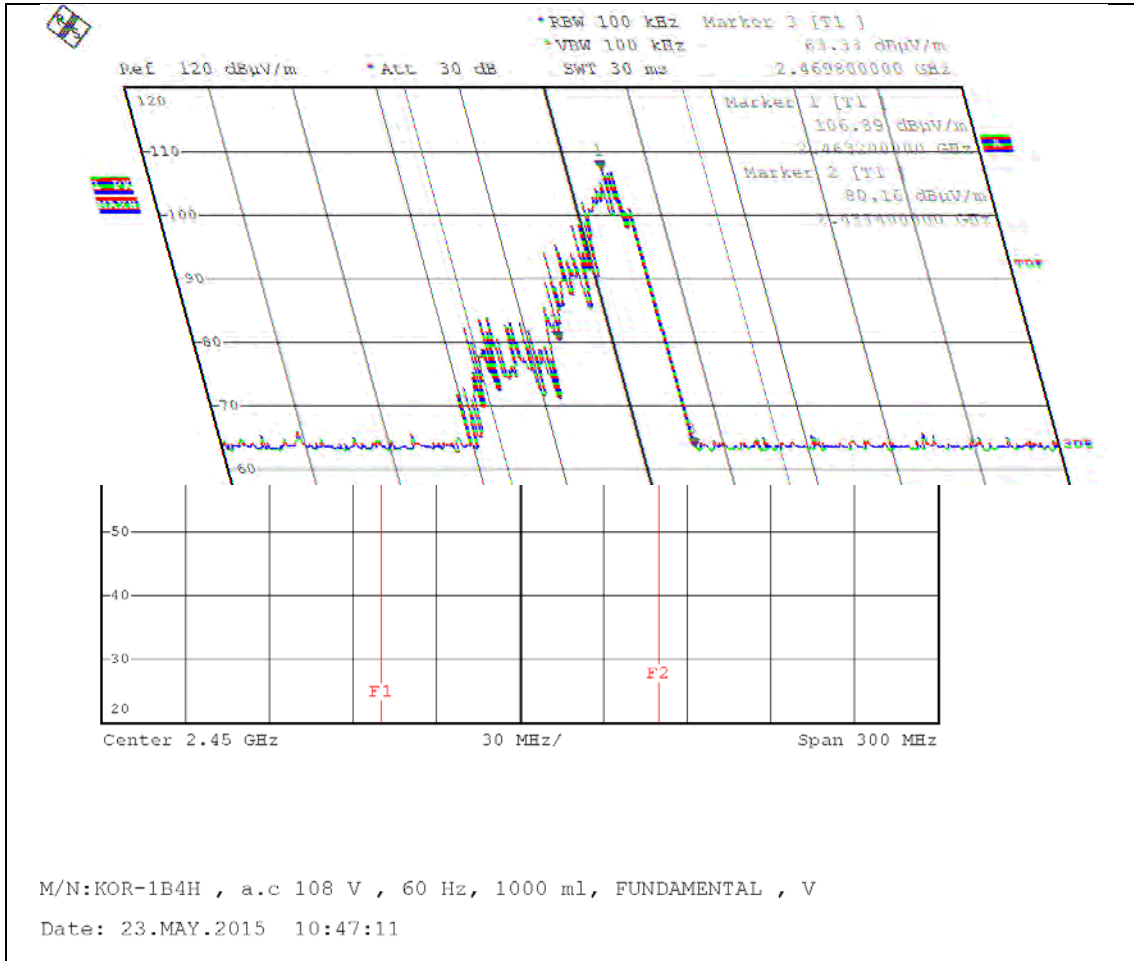

**Vertical (108 V, 1000 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

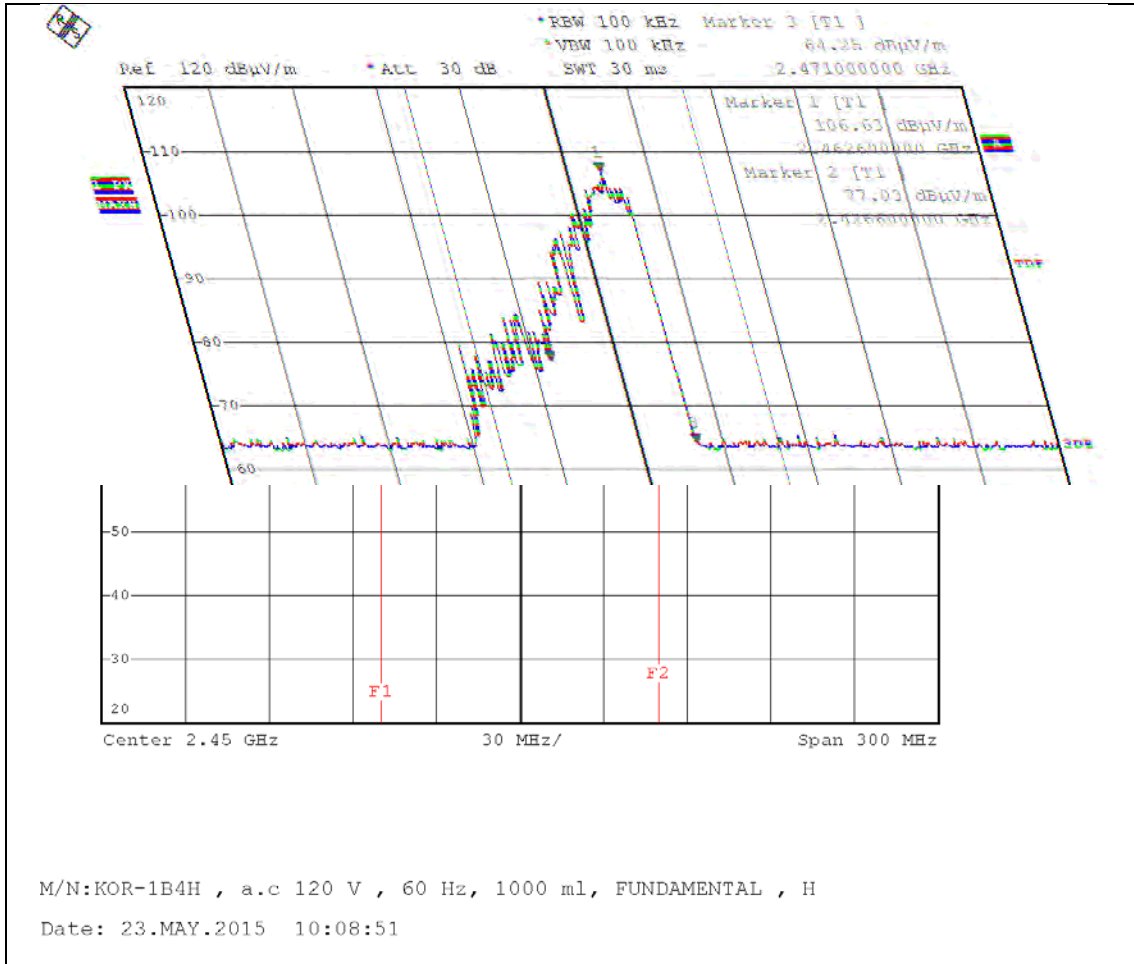

**Horizontal (120 V, 1000 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

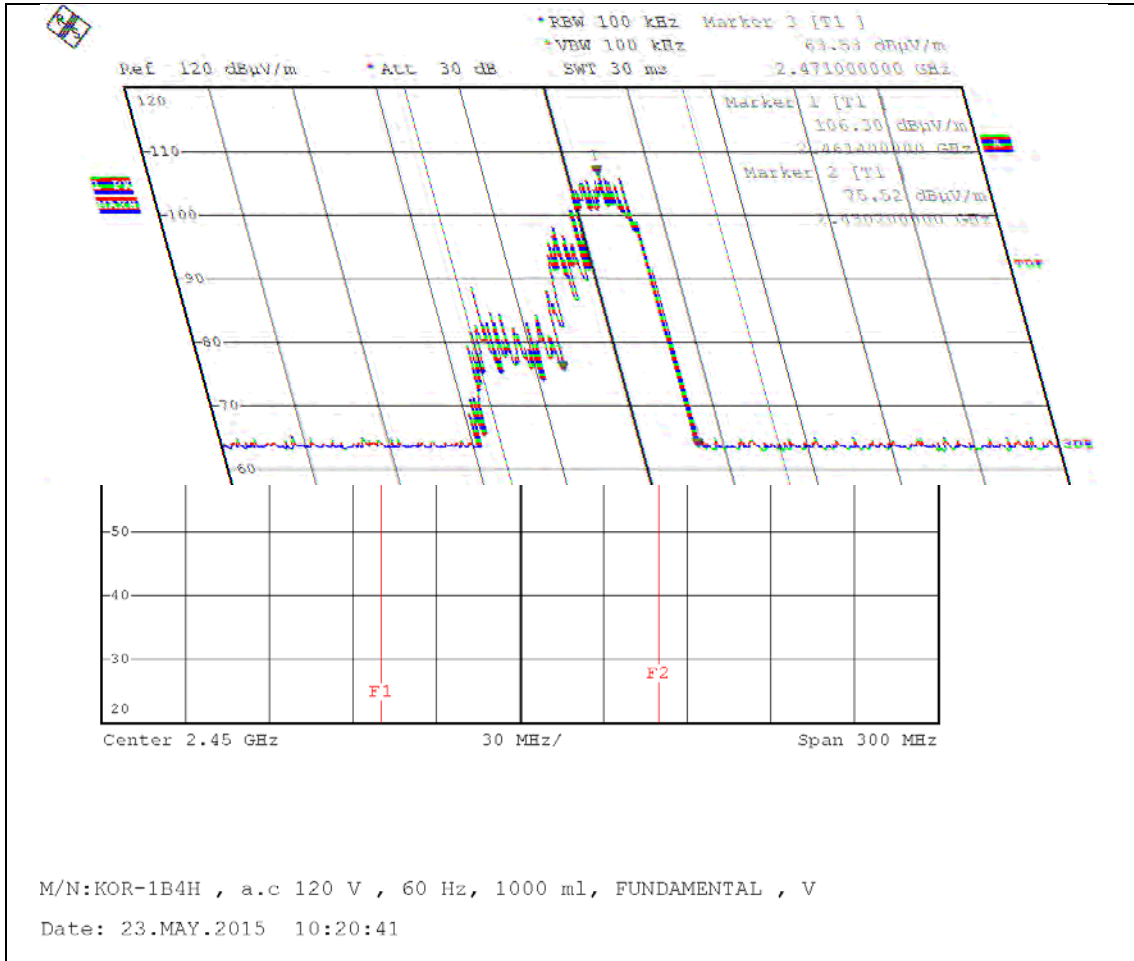

**Vertical (120 V, 1000 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

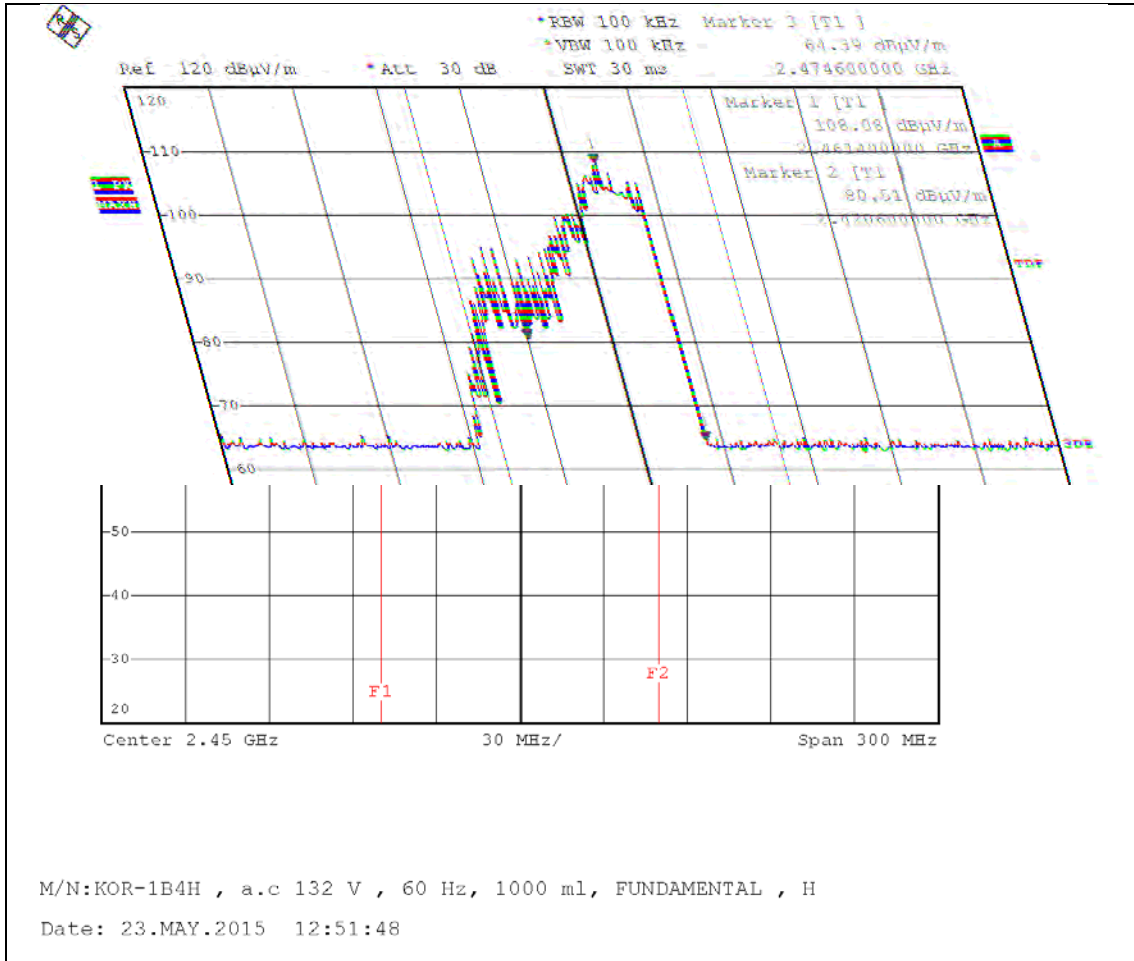

**Horizontal (132 V, 1000 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

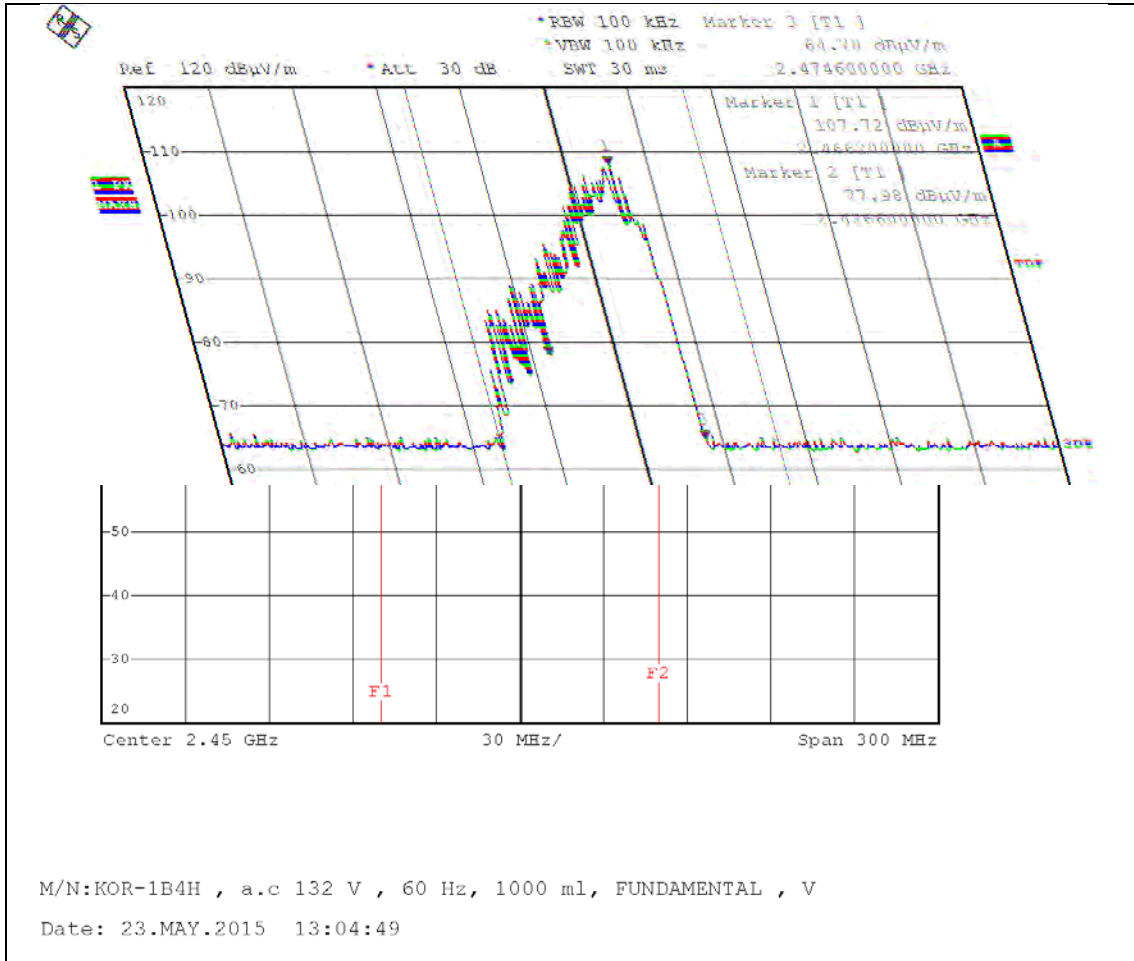

**Vertical (132 V, 1000 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

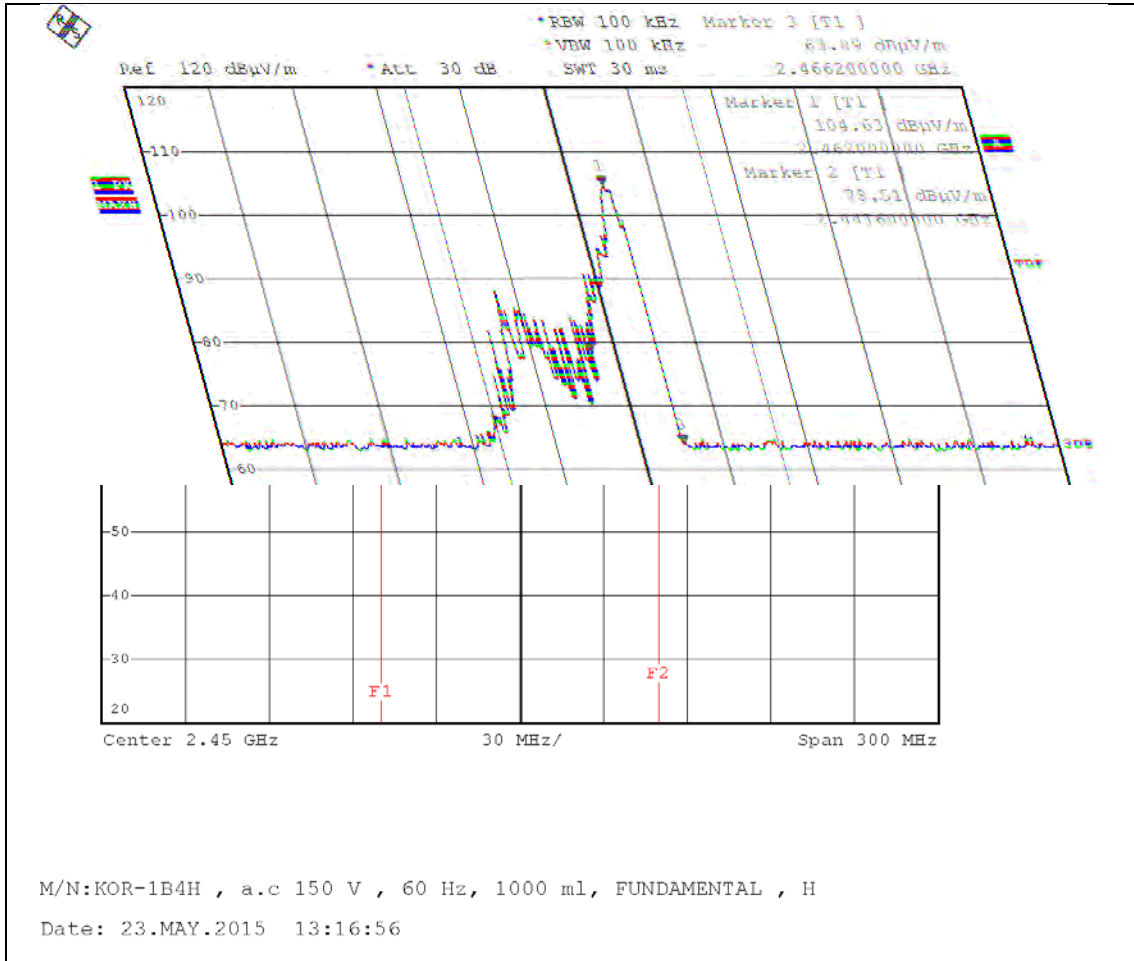

**Horizontal (150 V, 1000 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Line Voltage Variation Test**

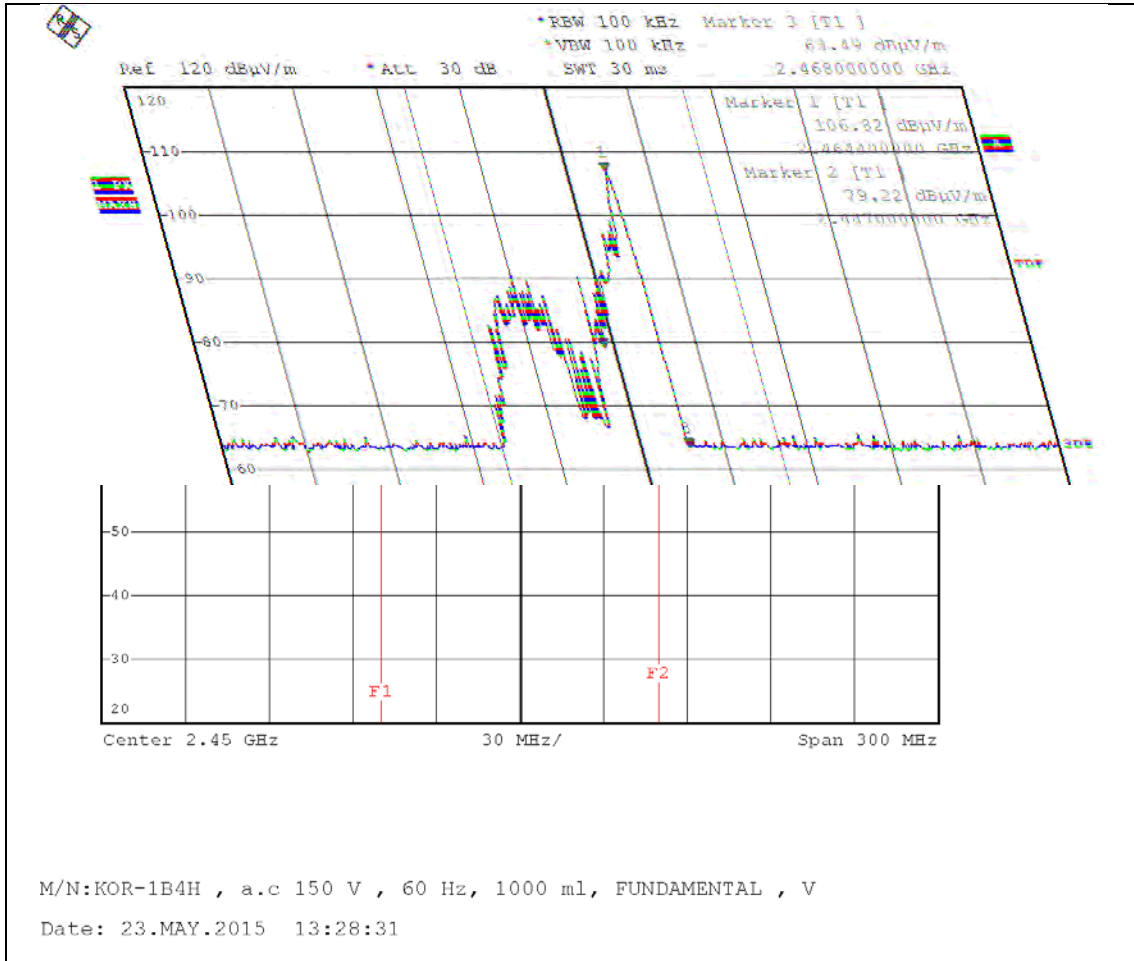

**Vertical (150 V, 1000 ml)**

# PLOTS OF EMISSIONS

- **Frequency vs Load Variation Test**

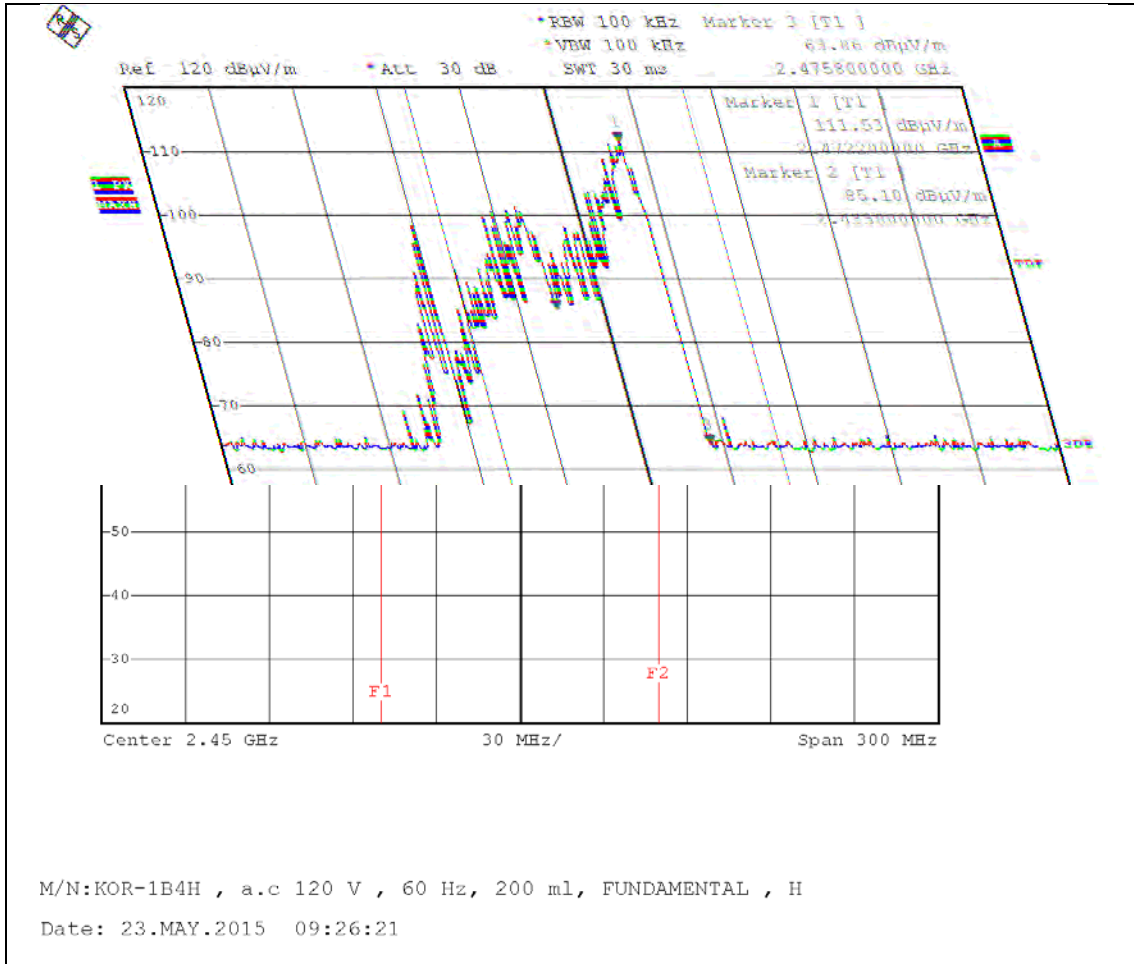


**Horizontal (120 V, 200 ml)**



# PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

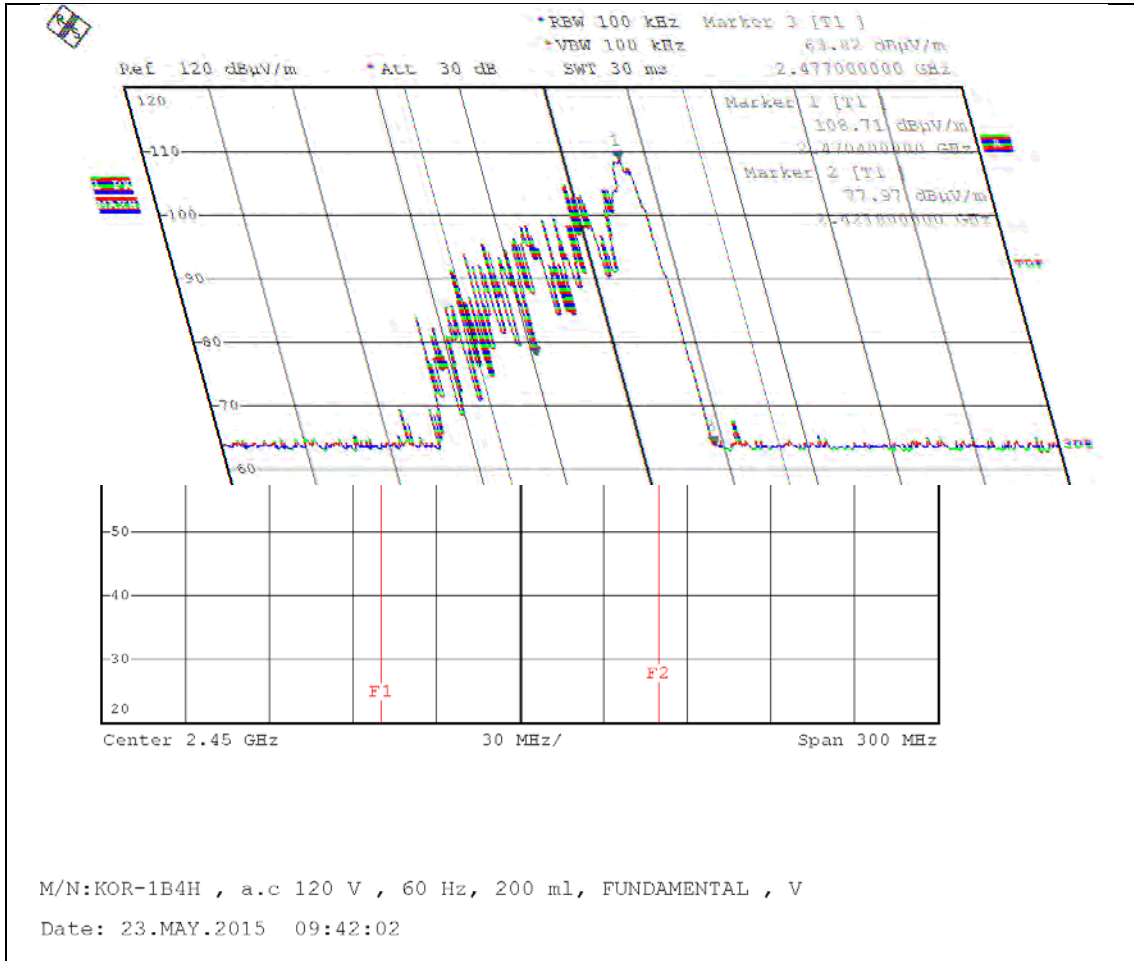

**Vertical (120 V, 200 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

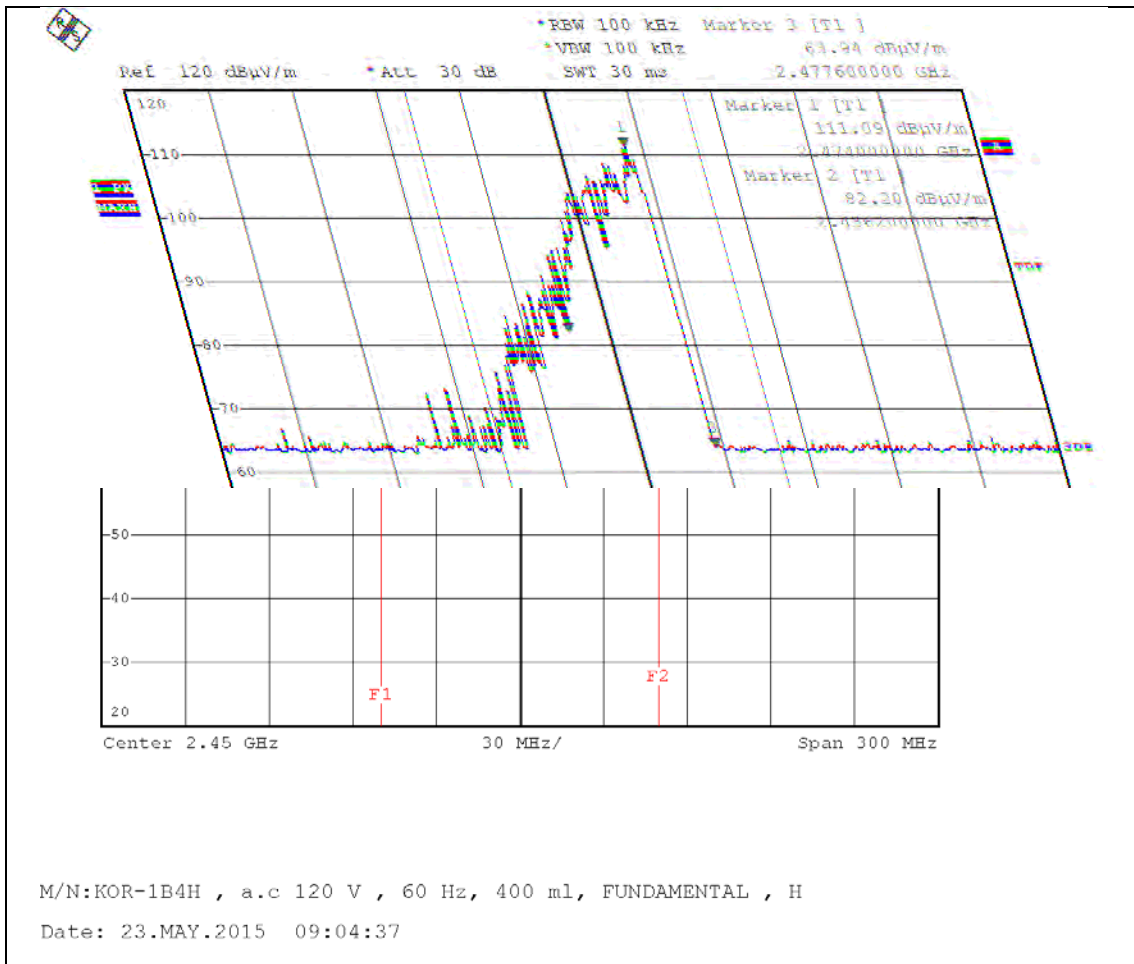

**Horizontal (120 V, 400 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

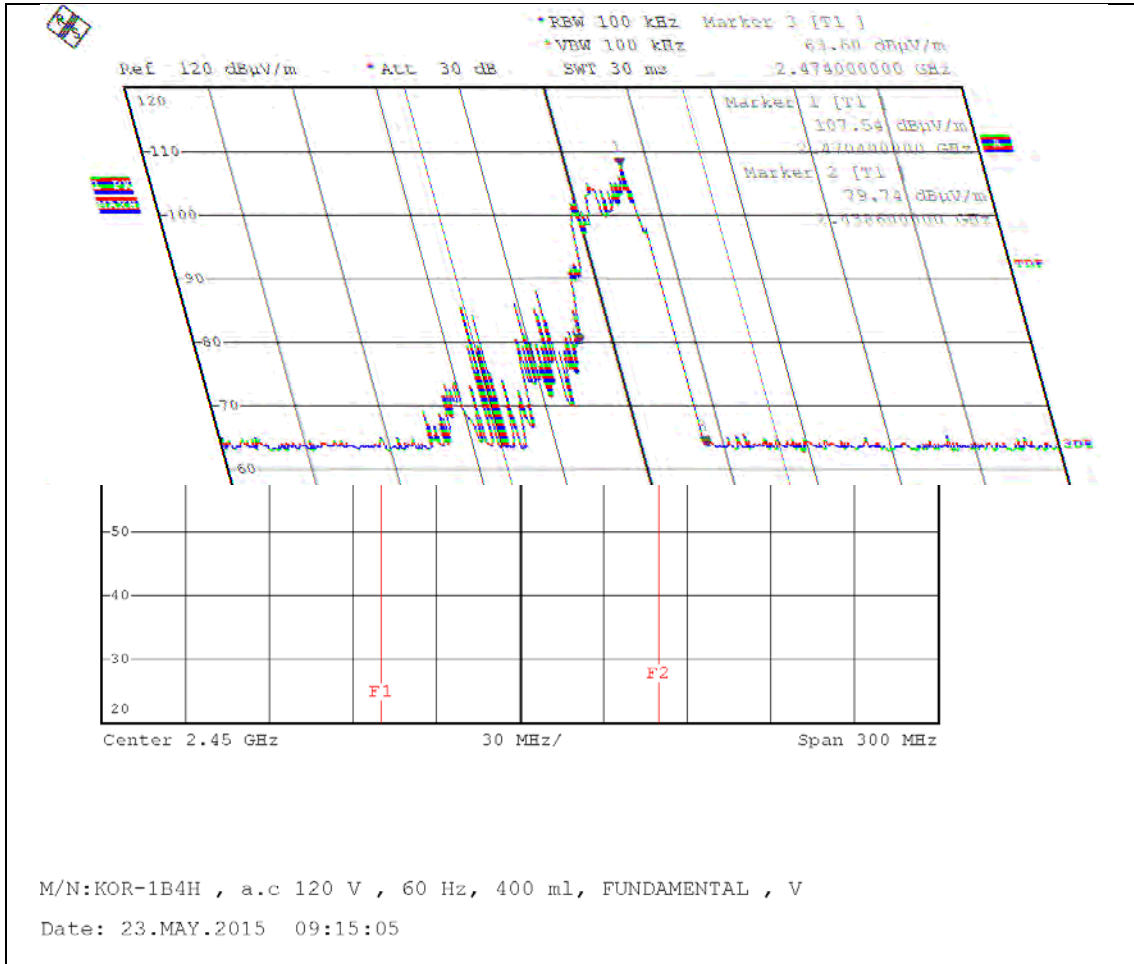

**Vertical (120 V, 400 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

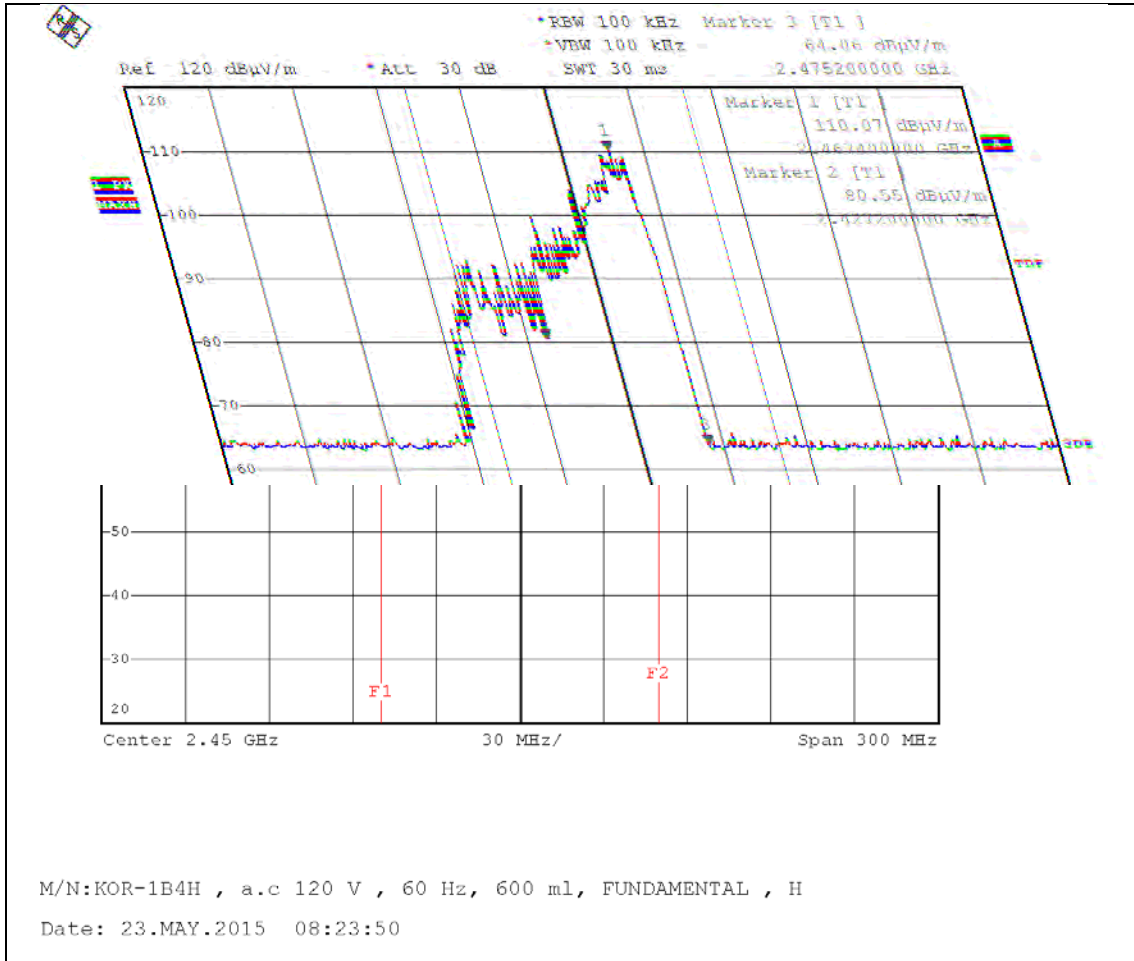

Horizontal (120 V, 600 ml)

# PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

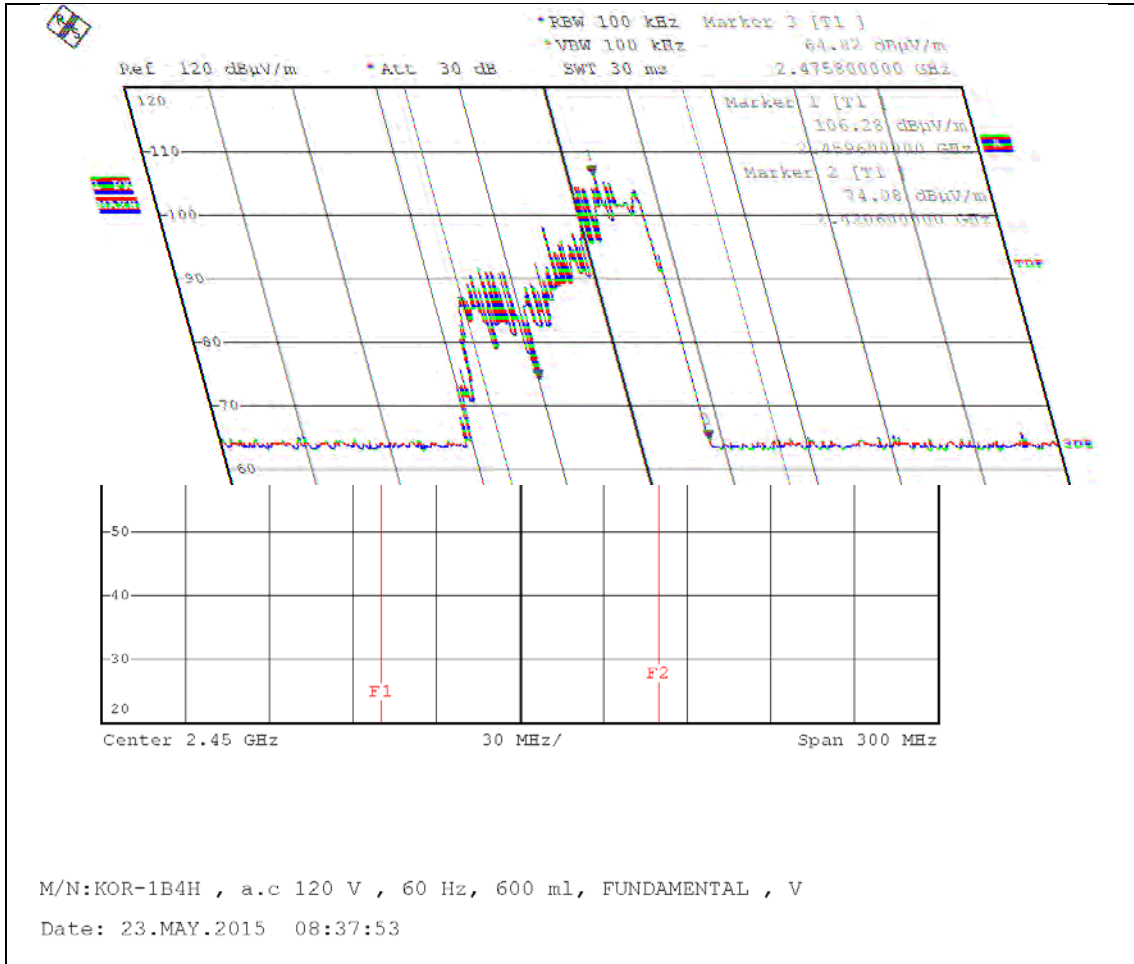

**Vertical (120 V, 600 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

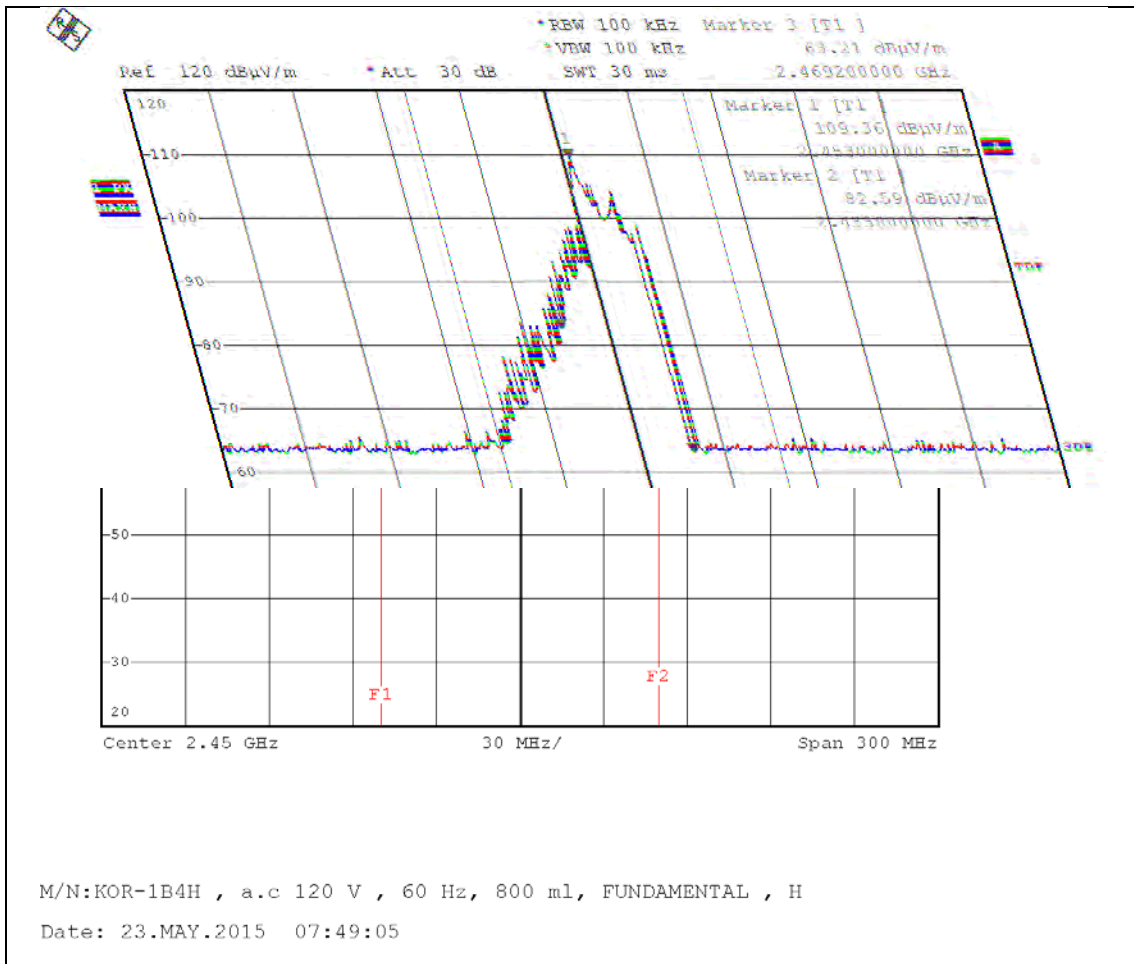

**Horizontal (120 V, 800 ml)**

# PLOTS OF EMISSIONS


- **Frequency vs Load Variation Test**

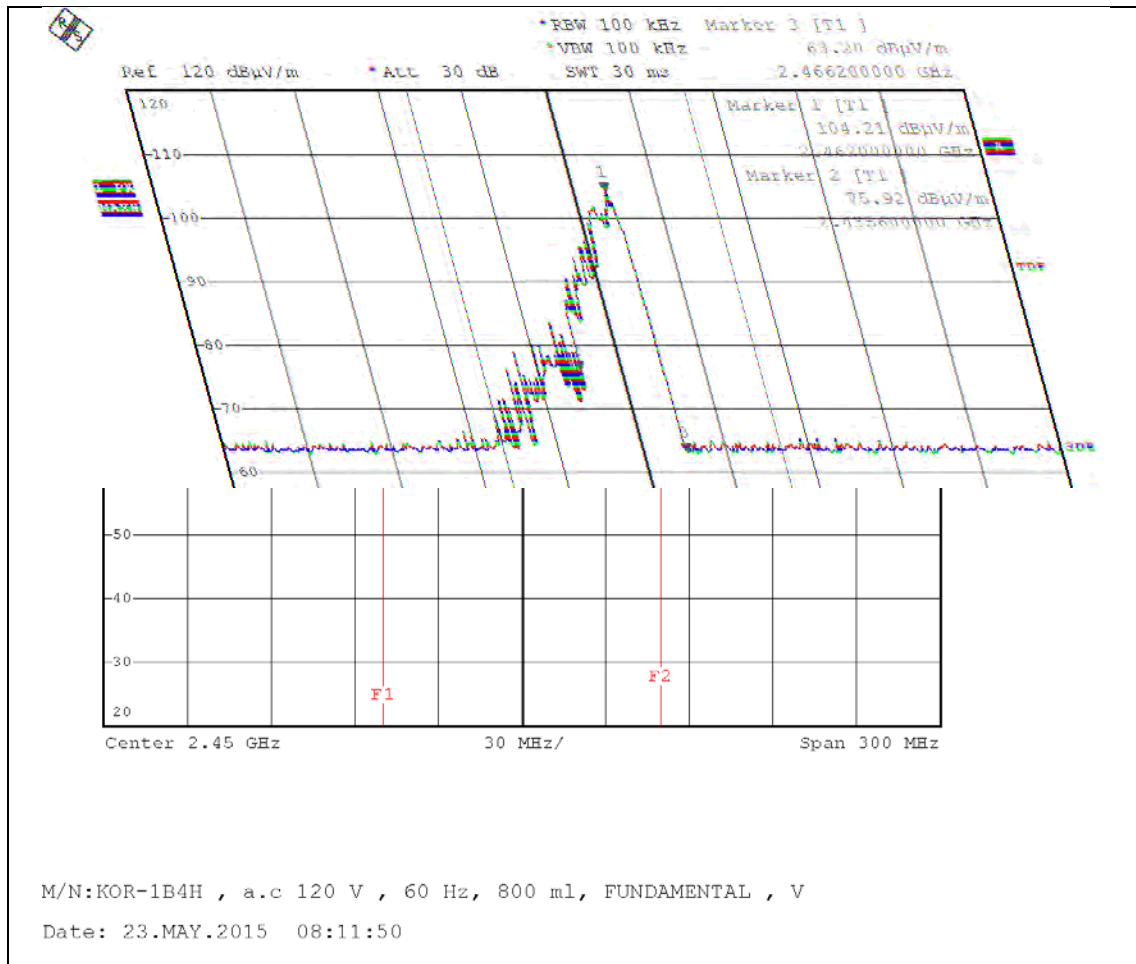

**Vertical (120 V, 800 ml)**

# PLOTS OF EMISSIONS

- **Frequency vs Load Variation Test**

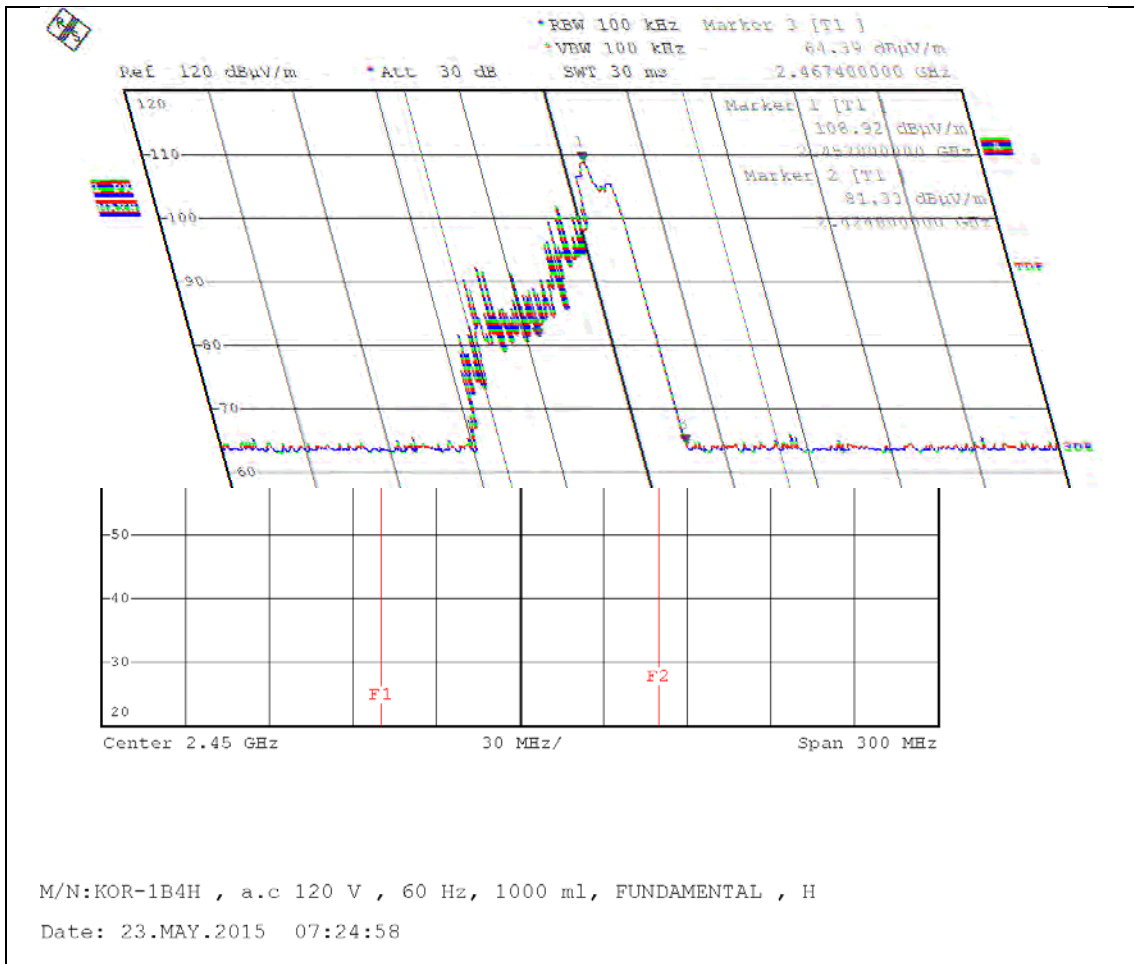


**Horizontal (120 V, 1000 ml)**



# PLOTS OF EMISSIONS

- **Frequency vs Load Variation Test**

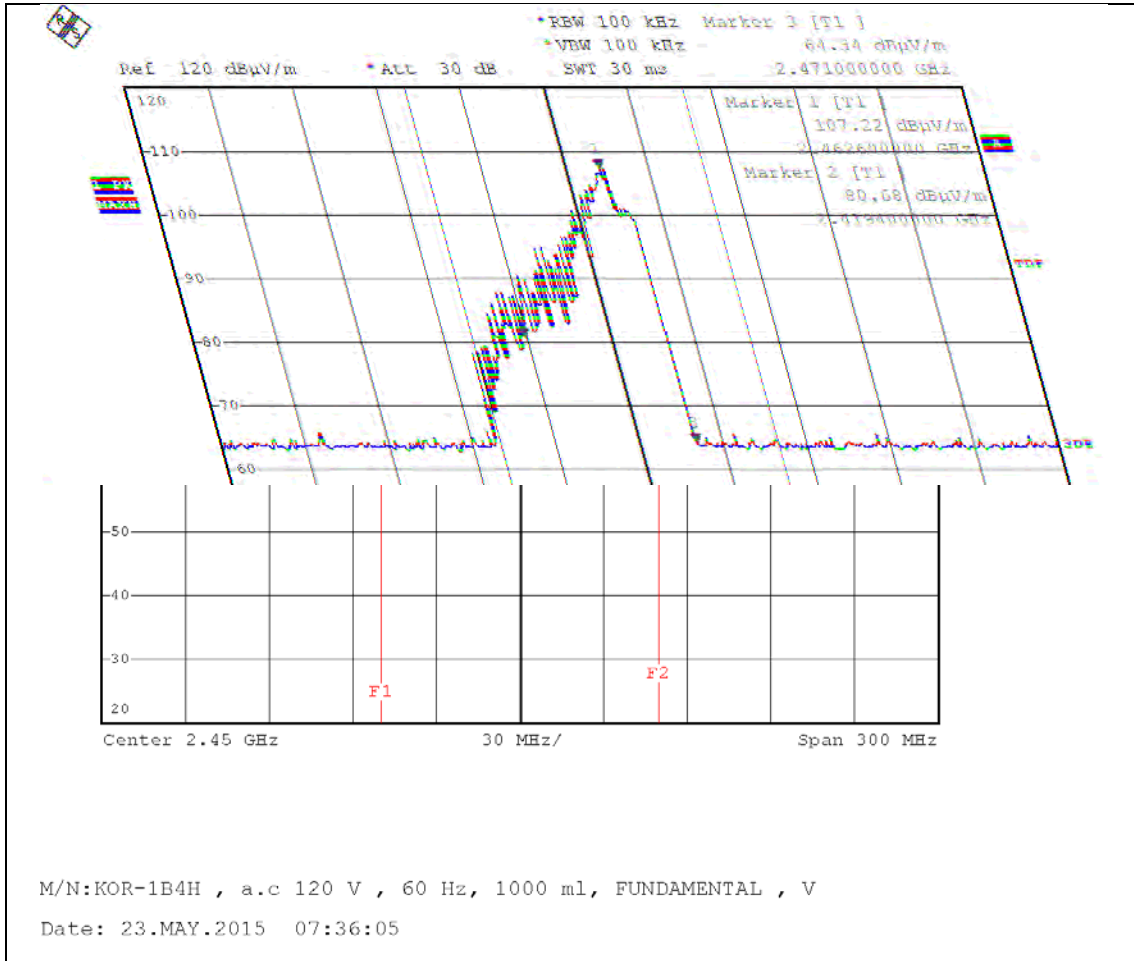

**Vertical (120 V, 1000 ml)**

## ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95 %

### 1. Conducted Uncertainty Calculation

Source of Uncertainty	$X_i$	Uncertainty of $X_i$		Coverage factor $k$	$u(X_i)$ (dB)	$C_i$	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	$R_s$	0.07	normal 1	1.00	0.07	1	0.07
Receiver reading	$R_i$	$\pm 0.02$	normal 2	2.00	0.01	1	0.01
Attenuation AMN- Receiver	$L_c$	$\pm 0.10$	rectangular	$\sqrt{3}$	0.06	1	0.06
AMN Voltage division factor	$L_{AMN}$	$\pm 0.09$	normal 2	2.00	0.05	1	0.05
Sine wave voltage	$dV_{SW}$	$\pm 0.17$	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	$dV_{PA}$	$\pm 0.92$	normal 2	2.00	0.50	1	0.50
Pulse repetition rate response	$dV_{PR}$	$\pm 0.35$	normal 2	2.00	0.18	1	0.18
Noise floor proximity	$dV_{NF}$	$\pm 0.00$	rectangular	$\sqrt{3}$	0.00	1	0.00
AMN Impedance	$dZ$	$\pm 2.00$	normal 2	2.00	1.00	1	1.00
Mismatch	$M$	+ 0.80 - 0.89	U-Shaped	$\sqrt{3}$	0.60	1	0.60
Remark	Using 50 $\Omega$ / 50 $\mu$ H AMN						
Combined Standard Uncertainty	Normal			$u_c = 1.29$ dB			
Expanded Uncertainty U	Normal ( $k = 2$ )			$U = 2.6$ dB (CL is 95 %)			

**2. Radiation Uncertainty Calculation (Below 1 GHz)**

Source of Uncertainty	$X_i$	Uncertainty of $X_i$		Coverage factor $k$	$u(X_i)$ (dB)	$C_i$	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	$RS$	0.67	normal 1	1.00	0.67	1	0.67
Receiver reading	$Ri$	$\pm 0.02$	normal 2	2.00	0.01	1	0.01
Sine wave voltage	$dV_{sw}$	$\pm 0.17$	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	$dV_{pa}$	$\pm 0.92$	normal 2	2.00	0.46	1	0.46
Pulse repetition rate response	$dV_{pr}$	$\pm 0.35$	normal 2	2.00	0.18	1	0.18
Noise floor proximity	$dV_{nf}$	$\pm 0.50$	normal 2	2.00	0.25	1	0.25
Antenna Factor Calibration	$A_F$	$\pm 2.00$	rectangular	$\sqrt{3}$	1.15	1	1.15
Cable Loss	$C_L$	$\pm 1.00$	normal 2	2.00	0.50	1	0.50
Antenna Directivity	$A_D$	$\pm 0.00$	rectangular	$\sqrt{3}$	0.00	1	0.00
Antenna Factor Height Dependence	$A_H$	$\pm 2.00$	rectangular	$\sqrt{3}$	1.15	1	1.15
Antenna Phase Centre Variation	$A_P$	$\pm 0.20$	rectangular	$\sqrt{3}$	0.12	1	0.12
Antenna Factor Frequency Interpolation	$A_I$	$\pm 0.25$	rectangular	$\sqrt{3}$	0.14	1	0.14
Site Imperfections	$S_i$	$\pm 4.00$	triangular	$\sqrt{6}$	1.63	1	1.63
Measurement Distance Variation	$D_V$	$\pm 0.60$	rectangular	$\sqrt{3}$	0.35	1	0.35
Antenna Balance	$D_{bal}$	$\pm 0.90$	rectangular	$\sqrt{3}$	0.52	1	0.52
Cross Polarization	$D_{Cross}$	$\pm 0.00$	rectangular	$\sqrt{3}$	0.00	1	0.00
Mismatch	$M$	+ 0.98 - 1.11	U-Shaped	$\sqrt{2}$	0.74	1	0.74
EUT Volume Diameter	$V_d$	0.33	normal 1	1.00	0.33	1	0.11
Combined Standard Uncertainty	Normal			$u_c = 2.72$ dB			
Expanded Uncertainty U	Normal ( $k = 2$ )			5.4 dB (CL is 95 %)			

**3. Radiation Uncertainty Calculation (Above 1 GHz)**

Source of Uncertainty	$X_i$	Uncertainty of $X_i$		Coverage factor $k$	$u(X_i)$ (dB)	$C_i$	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	RS	0.64	normal 1	1.00	0.64	1	0.64
Receiver Reading	Ri	$\pm 0.02$	normal 2	2	0.01	1	0.01
Attenuation (antenna-receiver)	ac	$\pm 0.40$	normal 2	2	0.20	1	0.20
Preamplifier gain	Gp	$\pm 0.11$	normal 2	2	0.06	1	0.06
Receiver Sine Wave	dVsw	$\pm 0.12$	normal 2	2	0.06	1	0.06
Instability of preamp gain	dGp	$\pm 1.2$	rectangular	$\sqrt{3}$	0.70	1	0.70
Noise Floor Proximity	dVnf	$\pm 0.70$	rectangular	$\sqrt{3}$	0.40	1	0.40
Antenna Factor Calibration	AF	$\pm 1.50$	normal 2	2	0.75	1	0.75
Directivity difference	DFadir	$\pm 1.00$	rectangular	$\sqrt{3}$	0.58	1	0.58
Phase Centre location	AP	$\pm 0.30$	rectangular	$\sqrt{3}$	0.17	1	0.17
Antenna Factor Frequency Interpolation	Ai	$\pm 0.30$	rectangular	$\sqrt{3}$	0.17	1	0.17
Site Imperfections	Si	$\pm 6.00$	triangular	$\sqrt{6}$	2.45	1	2.45
Effect of setup table material	dANT	$\pm 1.21$	rectangular	$\sqrt{3}$	0.70	1	0.70
Separation distance	dD	$\pm 0.50$	rectangular	$\sqrt{3}$	0.29	1	0.29
Cross Polarization	DCross	$\pm 0.00$	rectangular	$\sqrt{3}$	0.00	1	0.00
Table height	$dh$	$\pm 0.00$	normal 2	2	0.00	1	0.00
Mismatch (antenna-Preamplifier)	M	+ 1.30 - 1.50	U-Shaped	$\sqrt{2}$	1.00	1	1.00
Mismatch (preamplifier-antenna)	$M$	+ 1.20 - 1.40	U-Shaped	$\sqrt{2}$	0.92	1	0.92
Combined Standard Uncertainty	Normal			$u_c = 3.24$ dB			
Expanded Uncertainty U	Normal ( $k = 2$ )			$U = 6.5$ dB (CL is 95 %)			


## LIST OF TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Due to Calibration	Calibration Interval
1	Microwave survey meter	ETS Lindgren	1501	00033549	Feb.15 2017	2 year
2	LOOP ANTENNA	R&S	HFH2-Z2	N/A	Feb. 13 2016	2 years
3	EMI Test Receiver	R&S	ESCI	101041	Apr. 01 2016	1 year
4	Software	R&S	EMC32	Version 8.53.0	-	-
5	Artificial Mains Network	R&S	ESH2-Z5	100273	Apr. 01 2016	1 year
6	ATTENUATOR	FAIRVIEW	SA3N5W-10	N/A	Apr. 01 2016	1 year
7	EMI Test Receiver	R&S	ESU 40	100202	Apr. 01 2016	1 year
8	Software	R&S	EMC32	Version 8.53.0	-	-
9	TRILOG Broadband Test Antenna	SCHWARZBECK	VULB 9163	9163-454	Feb. 11 2016	2 year
10	ATTENUATOR	FAIRVIEW	SA3N5W-06	N/A	Apr. 01 2016	1 year
11	Controller	innco systems GmbH	CO2000-G	CO2000/562/ 23890210/L	N/A	N/A
12	Open Switch and Control Unit	R&S	OSP-120	100015	N/A	N/A
13	Antenna Mast (Left)	innco systems GmbH	MA4000-EP	N/A	N/A	N/A
14	Turn Table	innco systems GmbH	DT3000-3T	N/A	N/A	N/A
15	Signal Conditioning Unit	R&S	SCU 01	10030	Apr. 01 2016	1 year
16	SPECTRUM ANALYZER	Rohde & Schwarz	FSP40	100361	Jul. 16 2016	1 year
17	Signal Conditioning Unit	Rohde & Schwarz	SCU 18	10065	Apr. 01 2016	1 year
18	Double Ridged Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-474	Sep. 01 2016	2 year
19	Open Switch And Control Unit	R&S	OSP-120	100081	N/A	N/A
20	Turn Table	innco systems GmbH	DS 1200 S	N/A	N/A	N/A
21	Antenna Mast	R&S	MA 4000	N/A	N/A	N/A
22	DOUBLE RIDGED HORN ANTENNA	SCHWARZBECK	HF907	100197	Jun. 11 2017	2 year


## APPENDIX A – SAMPLE LABEL

### Labeling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

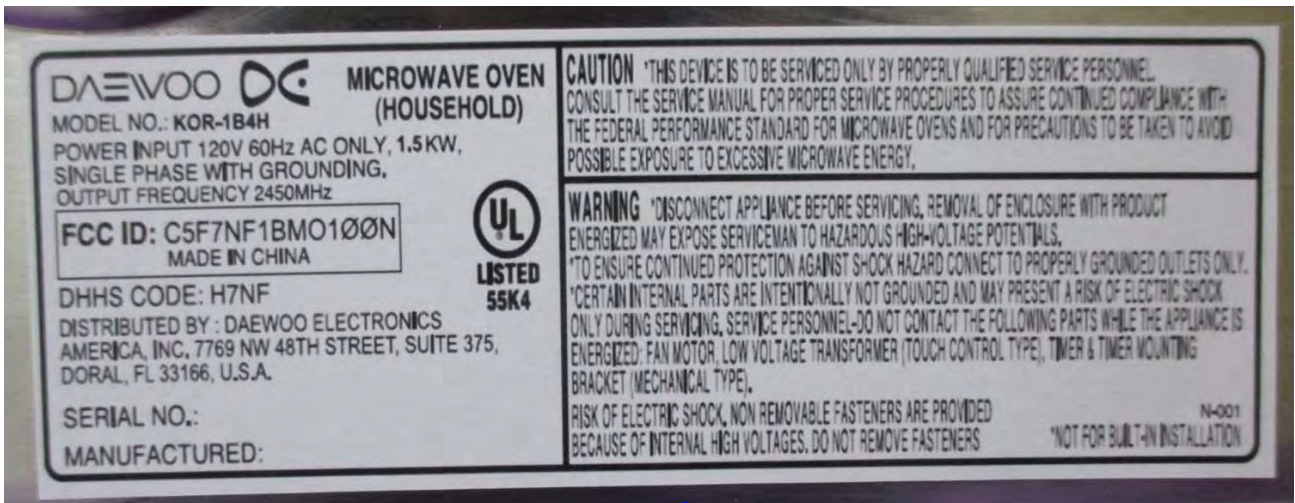


- FCC ID Location of EUT

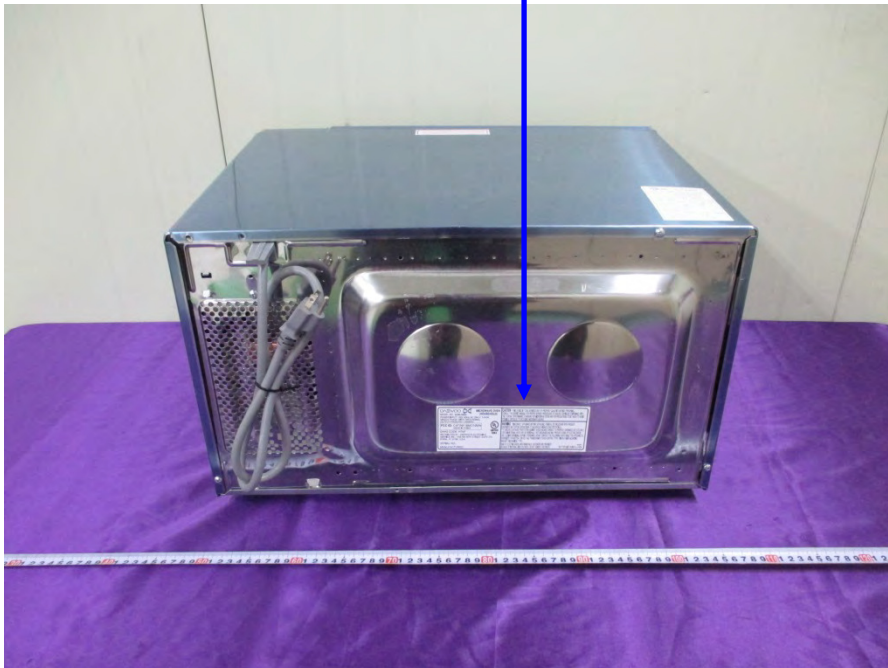


## APPENDIX B – PHOTOGRAPHS OF TEST SET-UP

The **Conducted Test Picture** and **Radiated Test Picture** and show the worst-case configuration and cable placement.

### ● Radiation hazard Test Picture

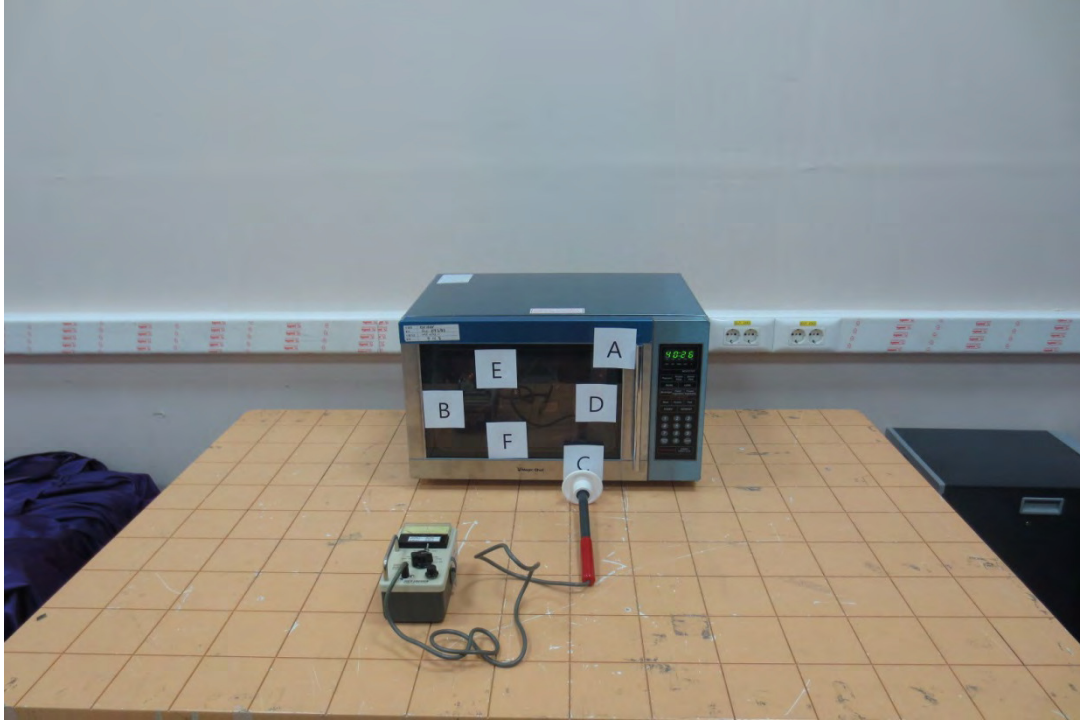


### ● Radiation hazard Test Picture

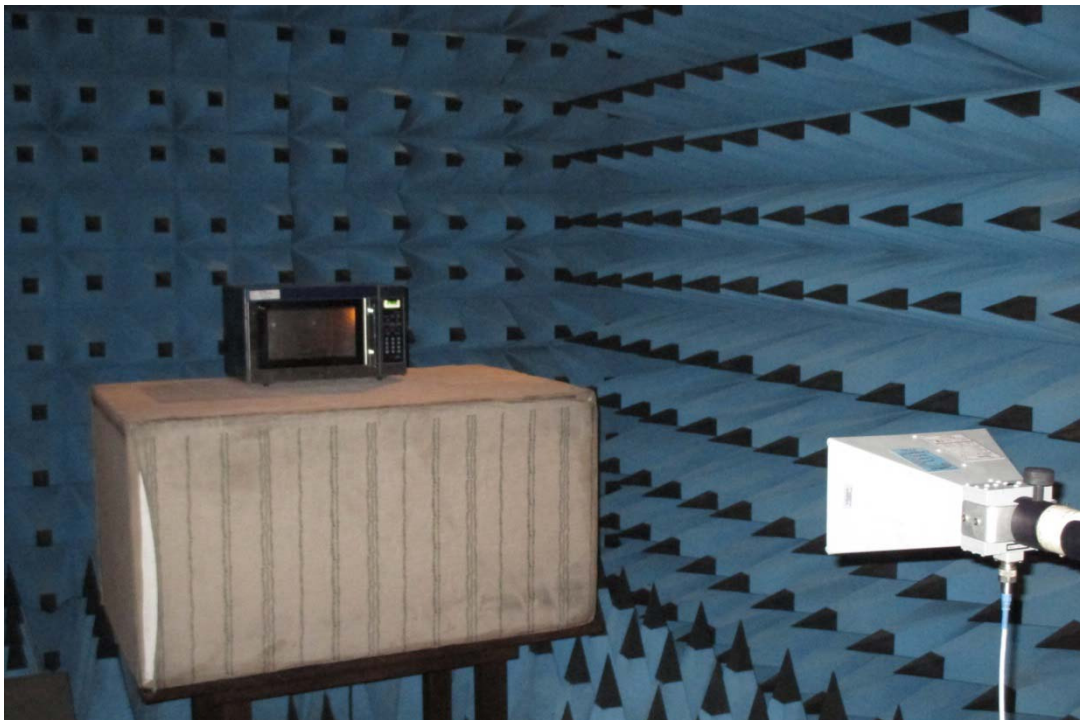

● **Conducted Test Picture (Front)**



● **Conducted Test Picture (Side)**

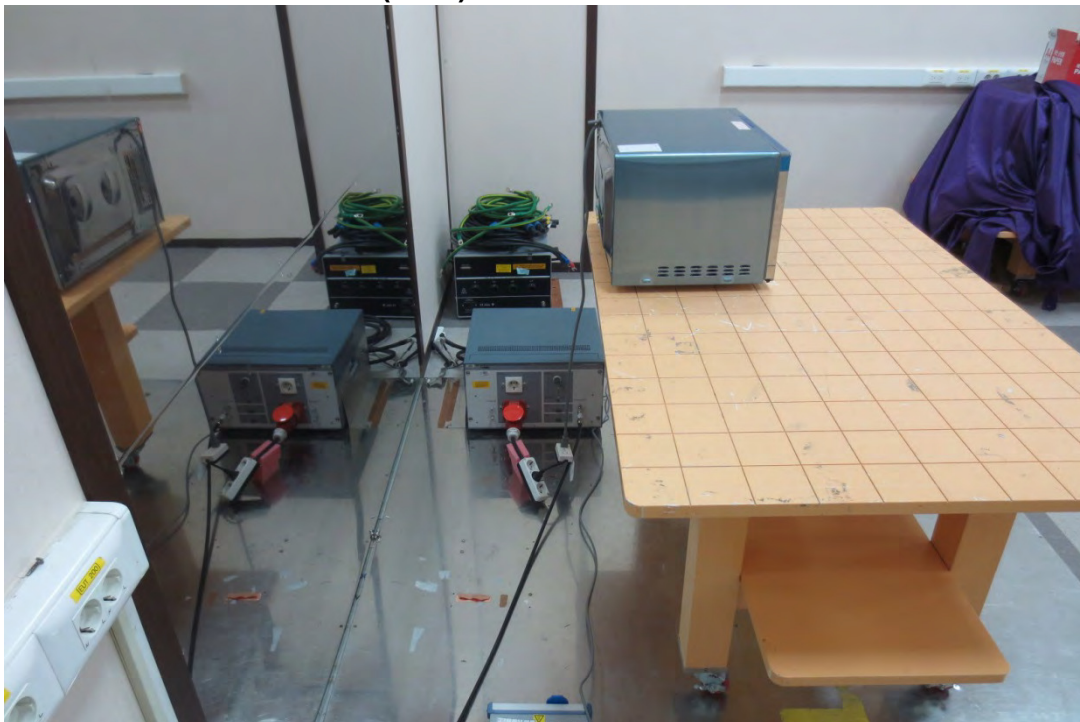



● Radiated Test Picture : 0.15 MHz ~ 30 MHz (Front)



● Radiated Test Picture : 0.15 MHz ~ 30 MHz (Rear)



● Radiated Test Picture : 30 MHz ~ 1 GHz (Front)




● Radiated Test Picture : 30 MHz ~ 1 GHz (Rear)



● Radiated Test Picture : 1 GHz ~ 18 GHz (Front)



● Radiated Test Picture : 1 GHz ~ 18 GHz (Rear)

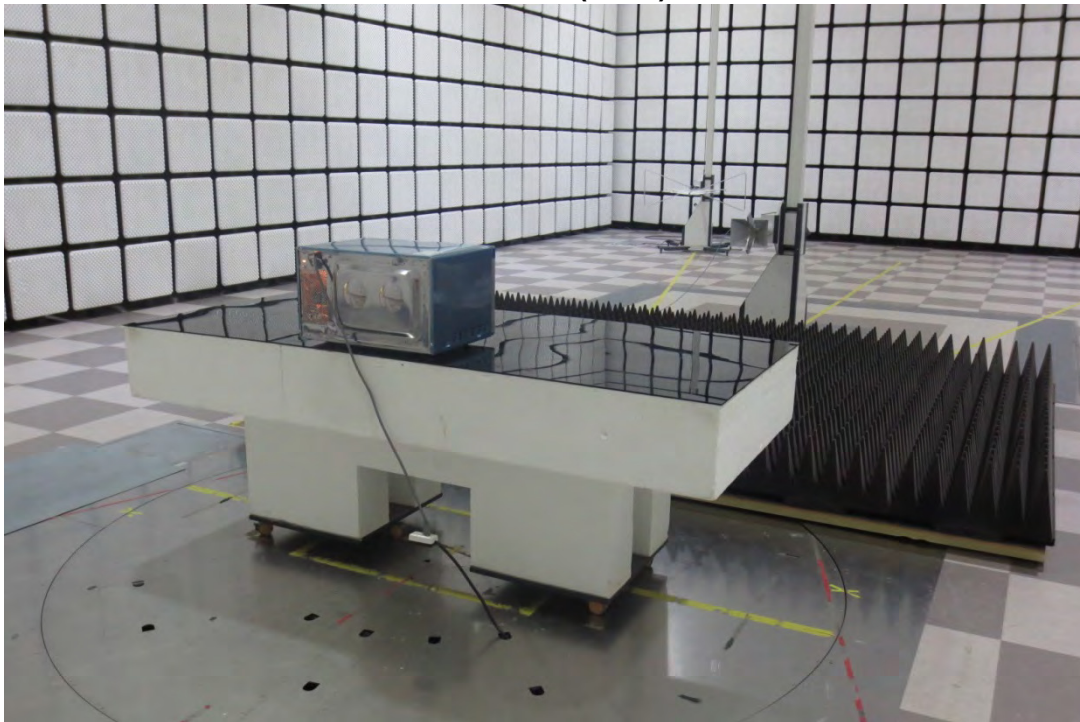

## APPENDIX C – EUT PHOTOGRAPHS

- Front View of EUT



- Rear View of EUT



- Door open View of EUT



- **Inside View of EUT**




- **Front View of Diode H.V.**






- **Front View of Fan Motor**

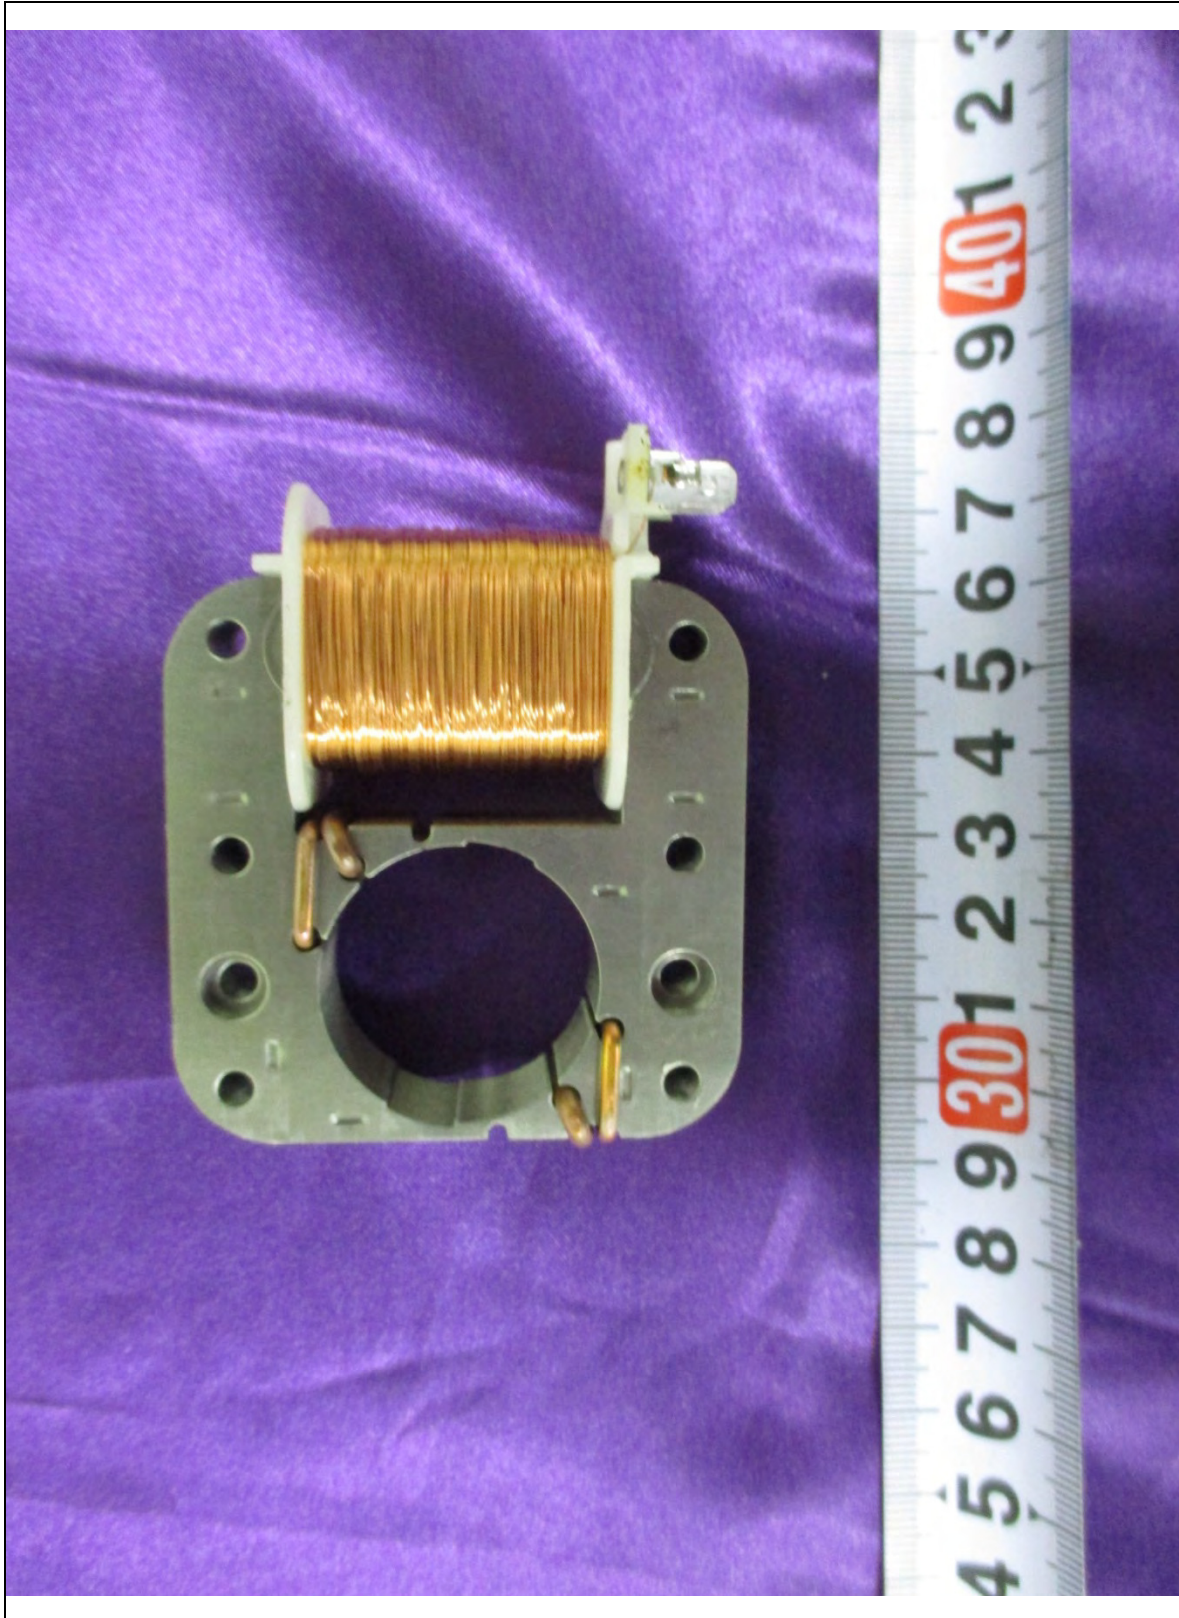

● **Rear View of Fan Motor**

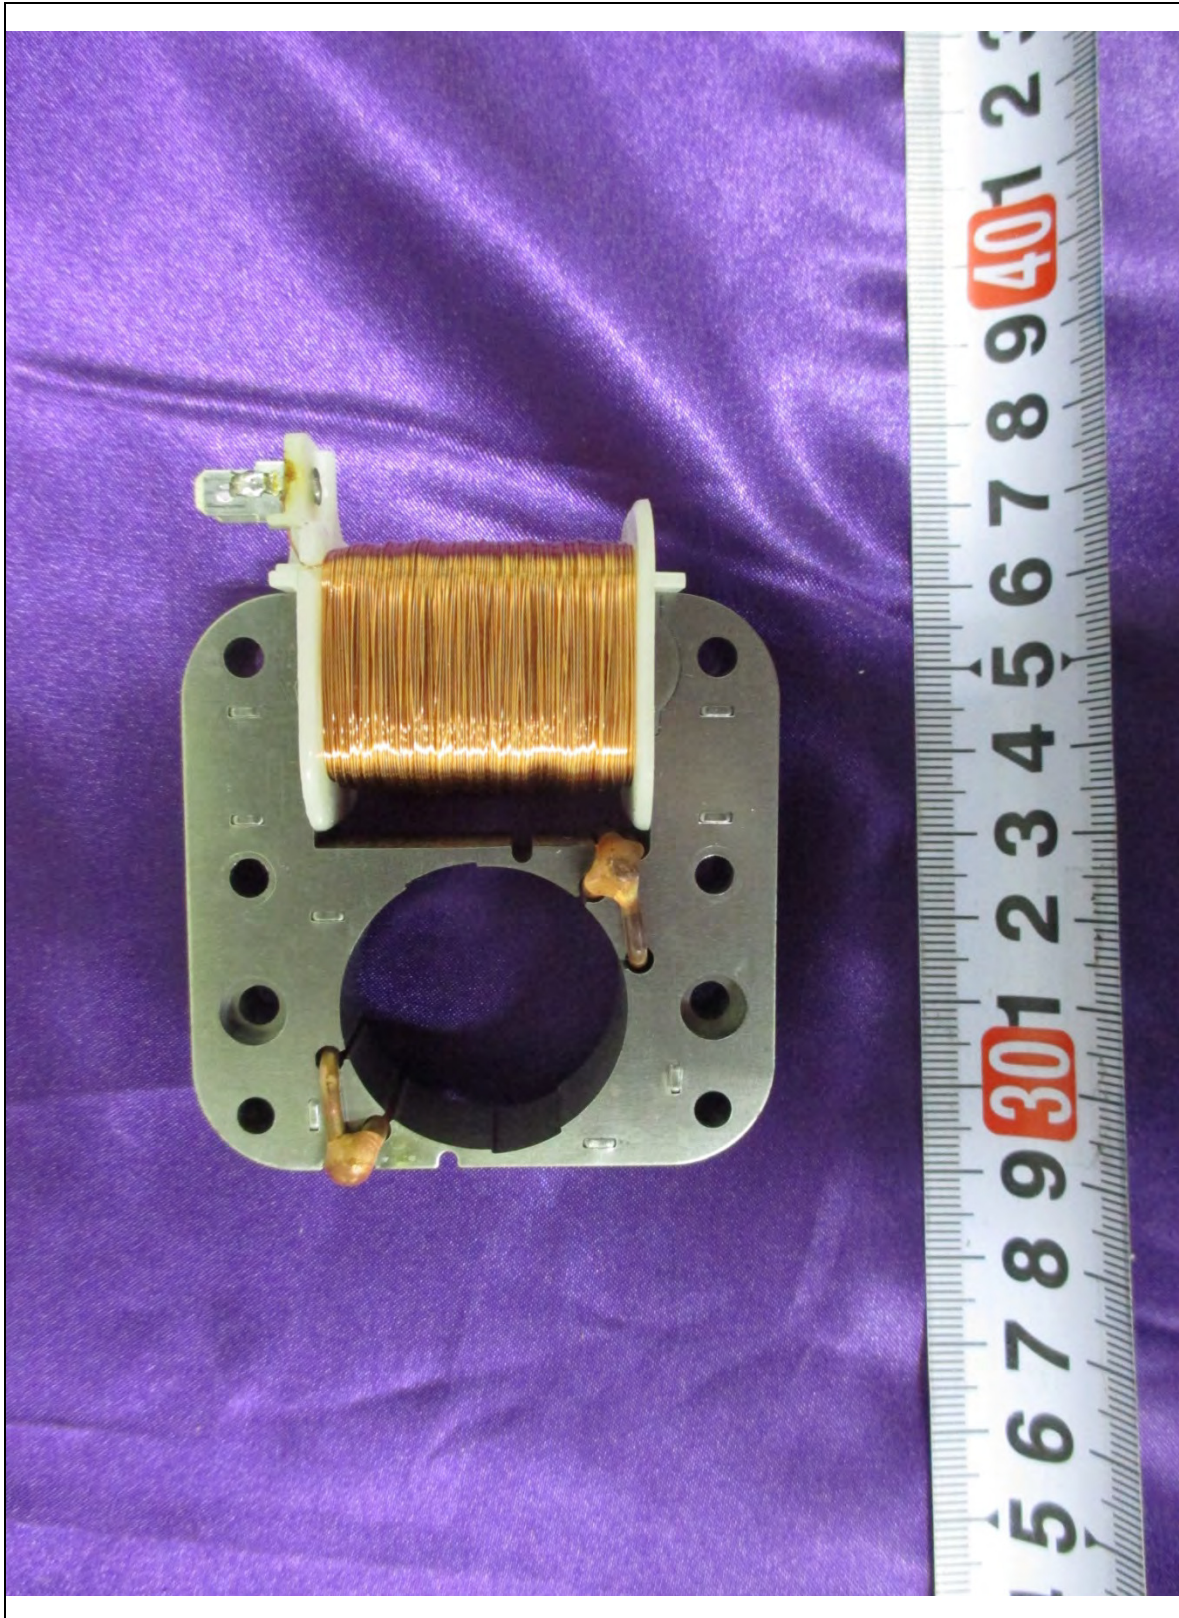


- Front View of H.V. CAPACITOR




- Rear View of H.V. CAPACITOR



- Front View of Noise Filter

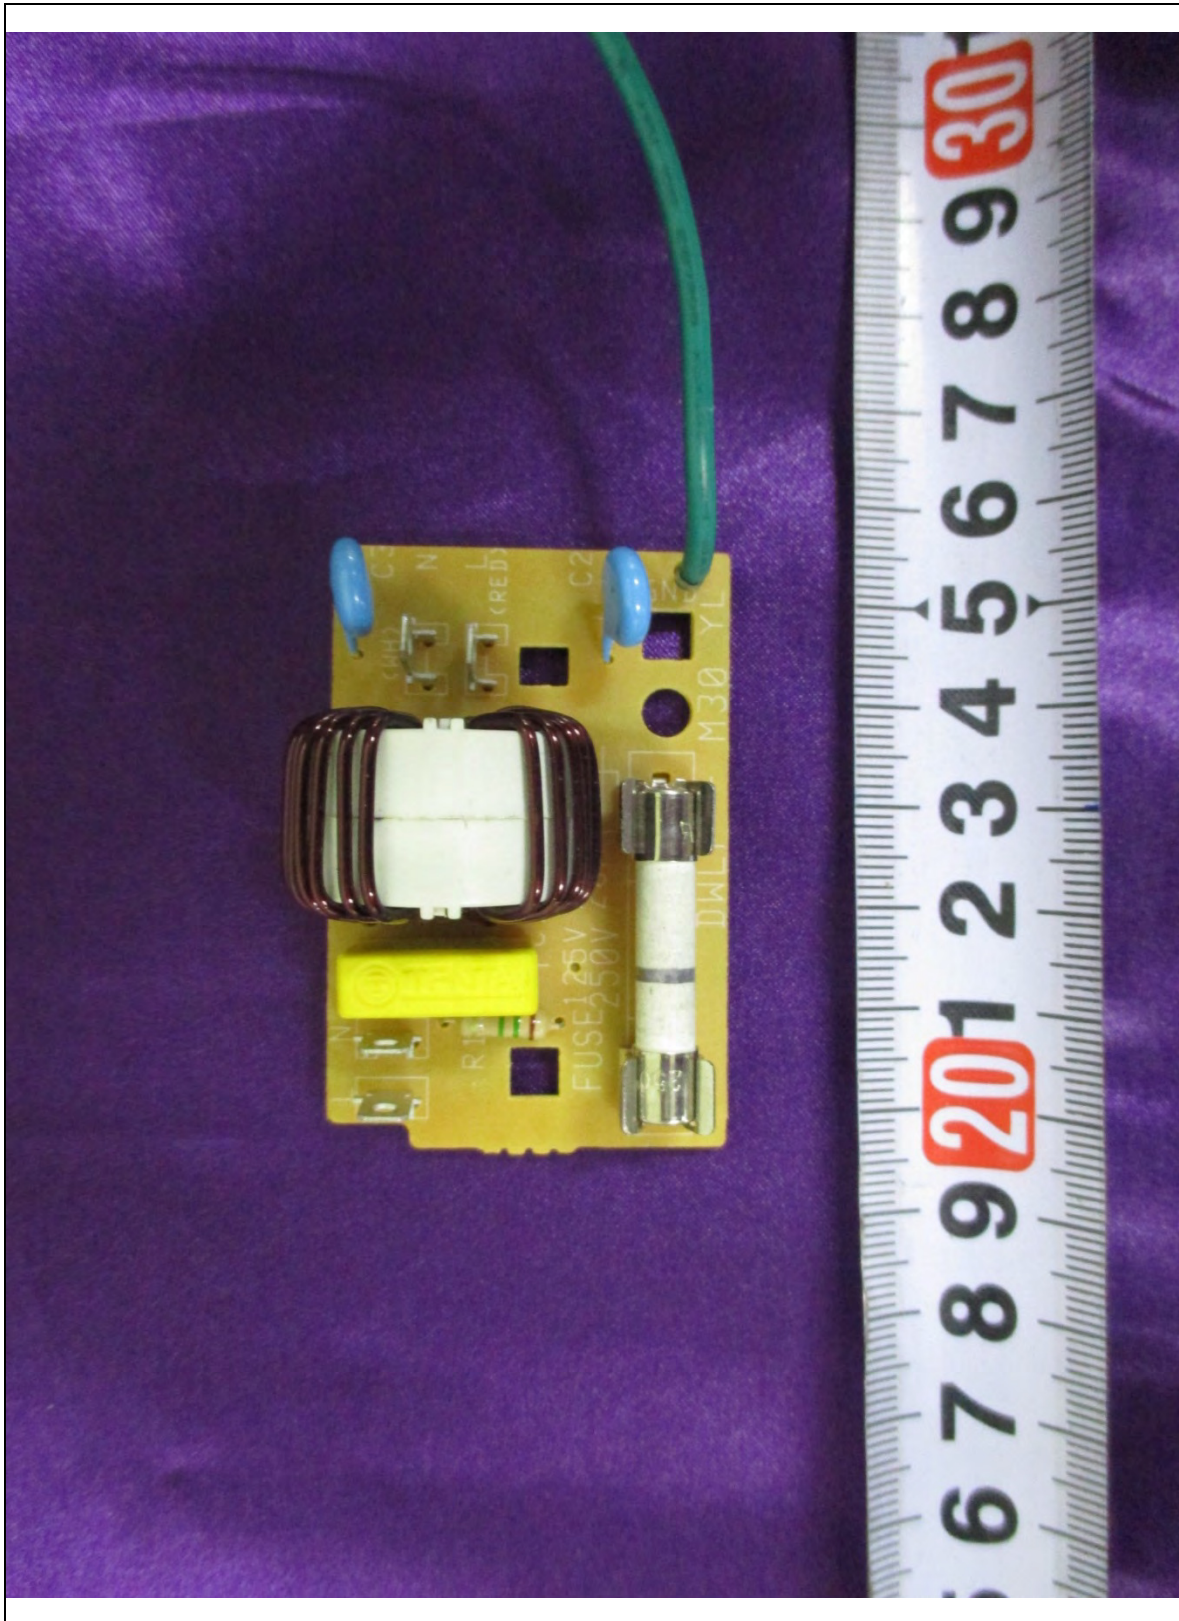


- **Rear View of Noise Filter**

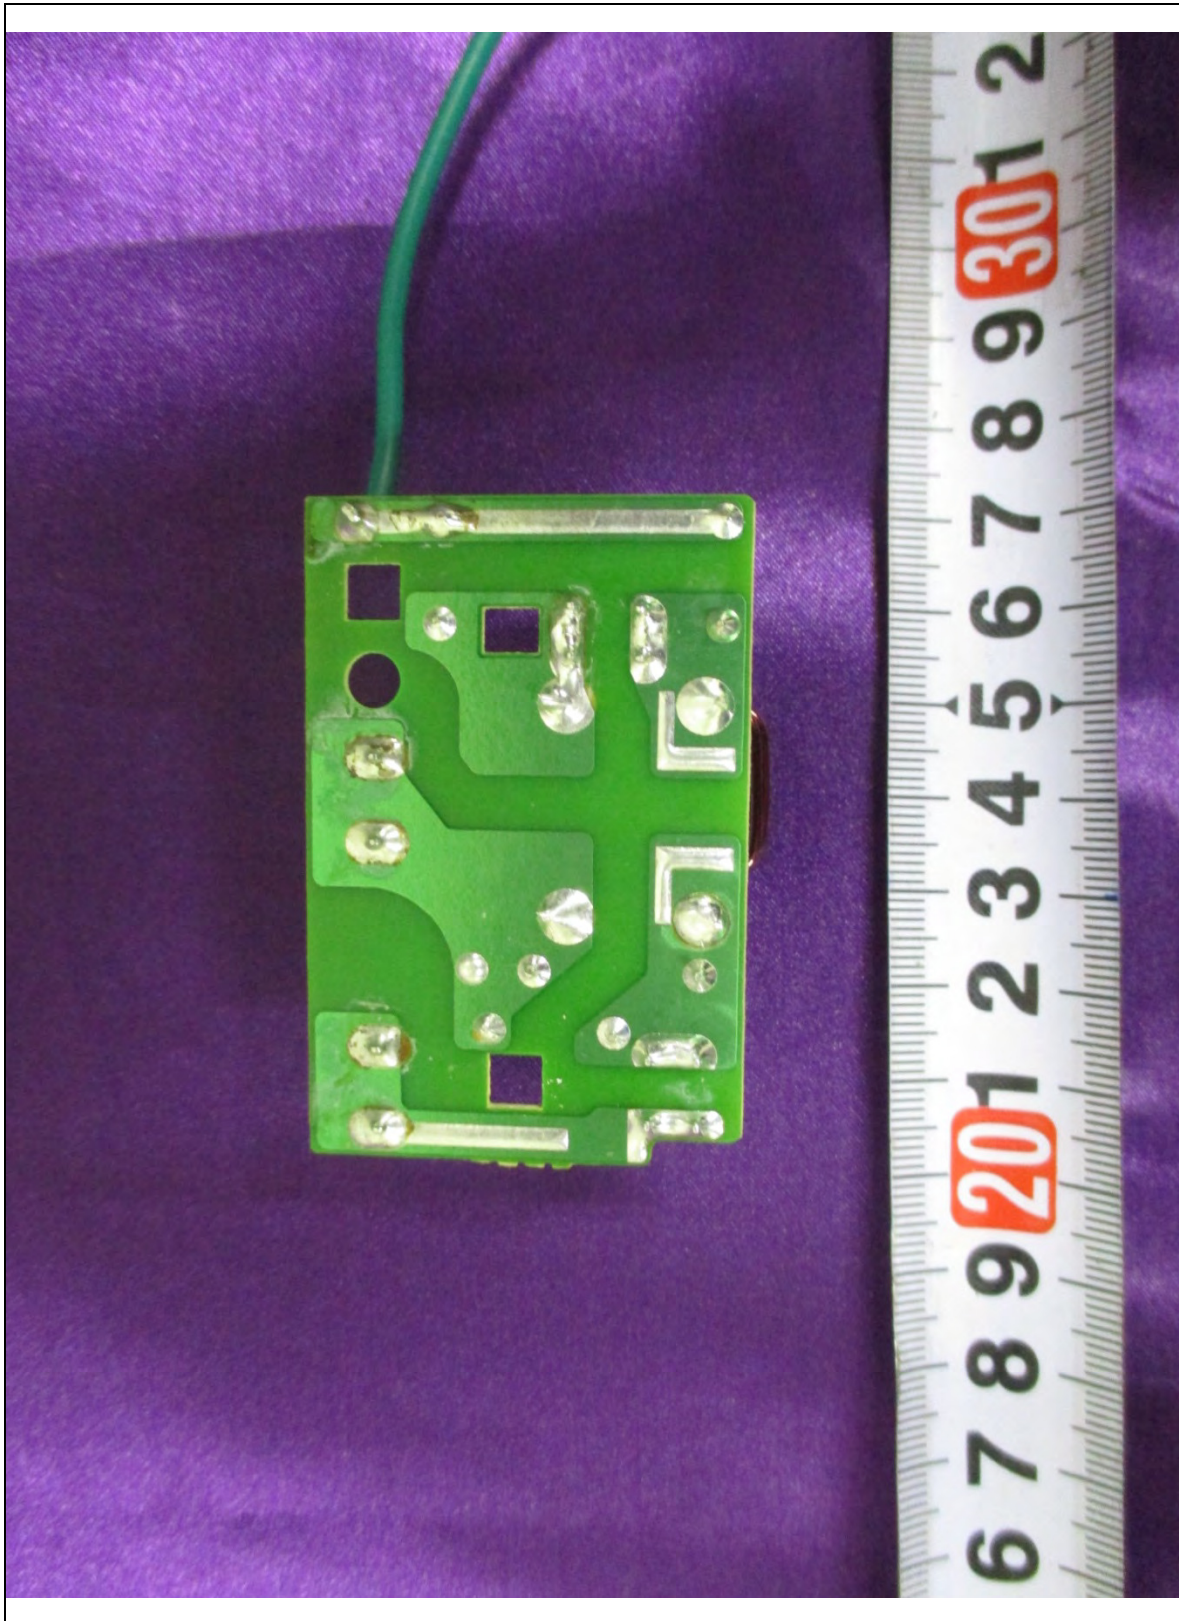

- Front View of Magnetron



- Rear View of Magnetron

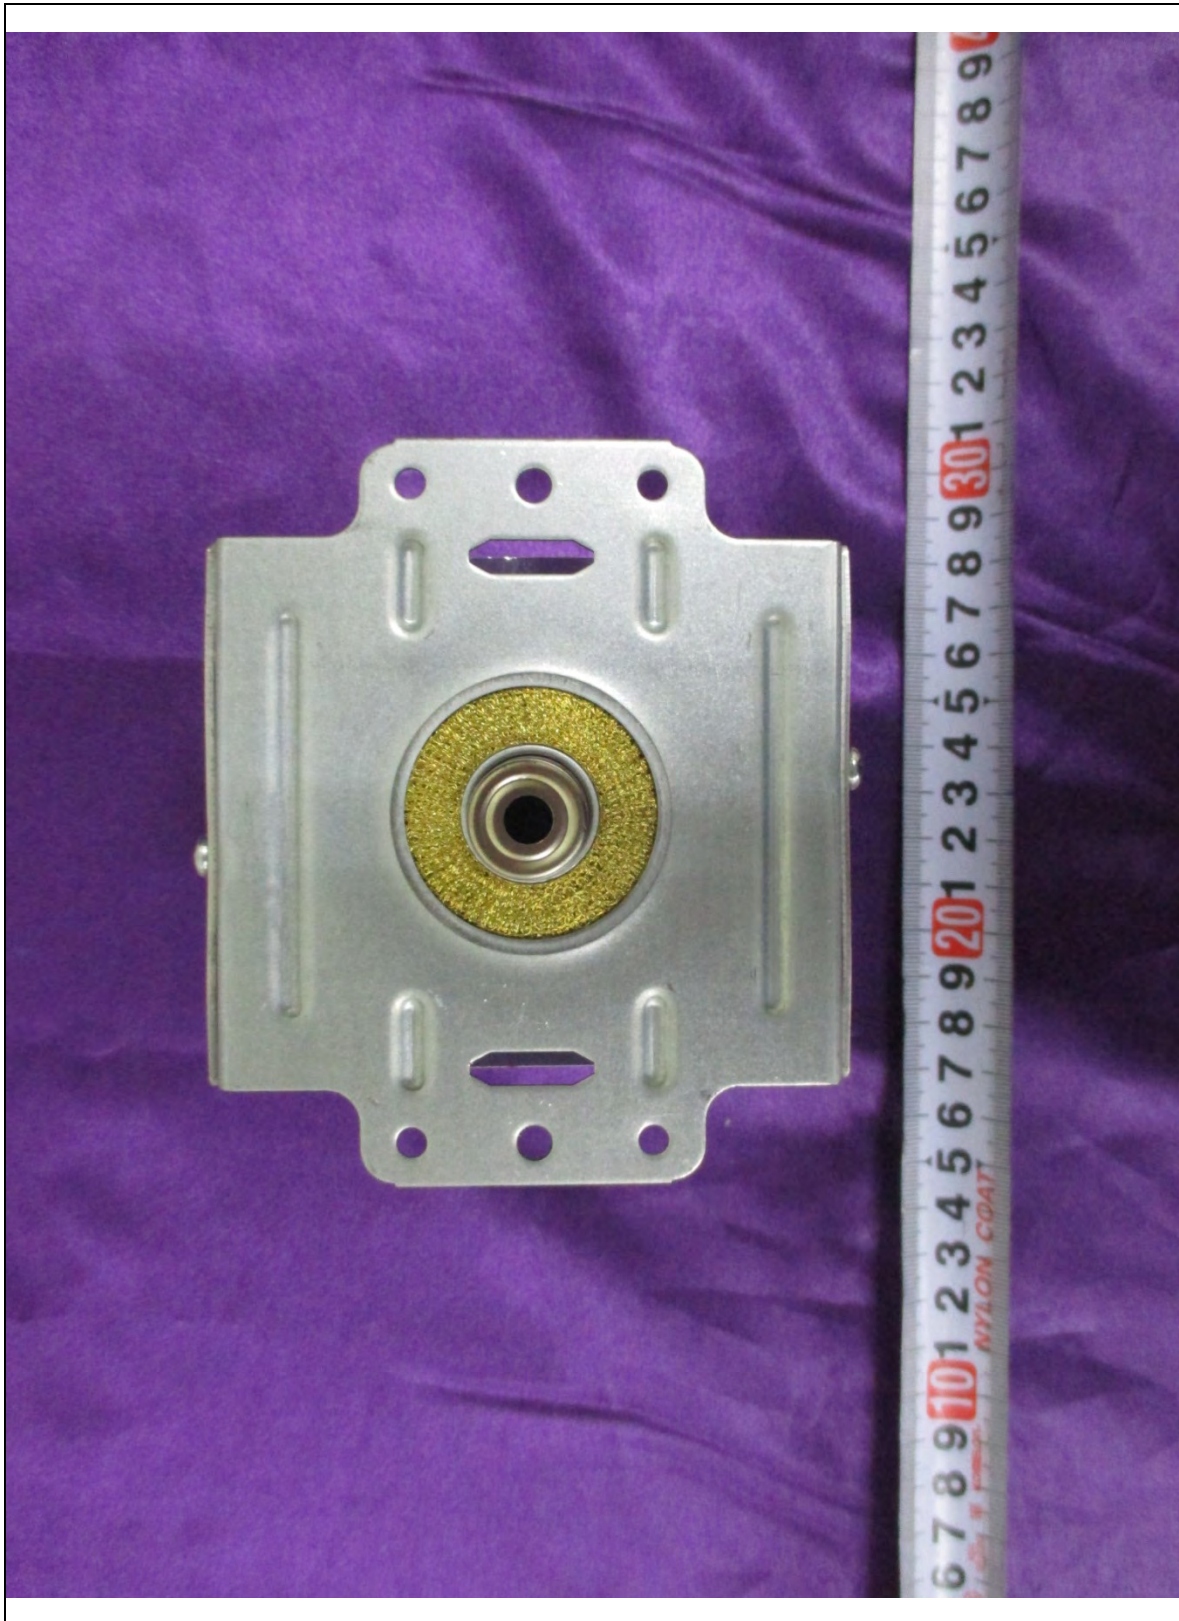




- Front View of Main Board




- Rear View of Main Board

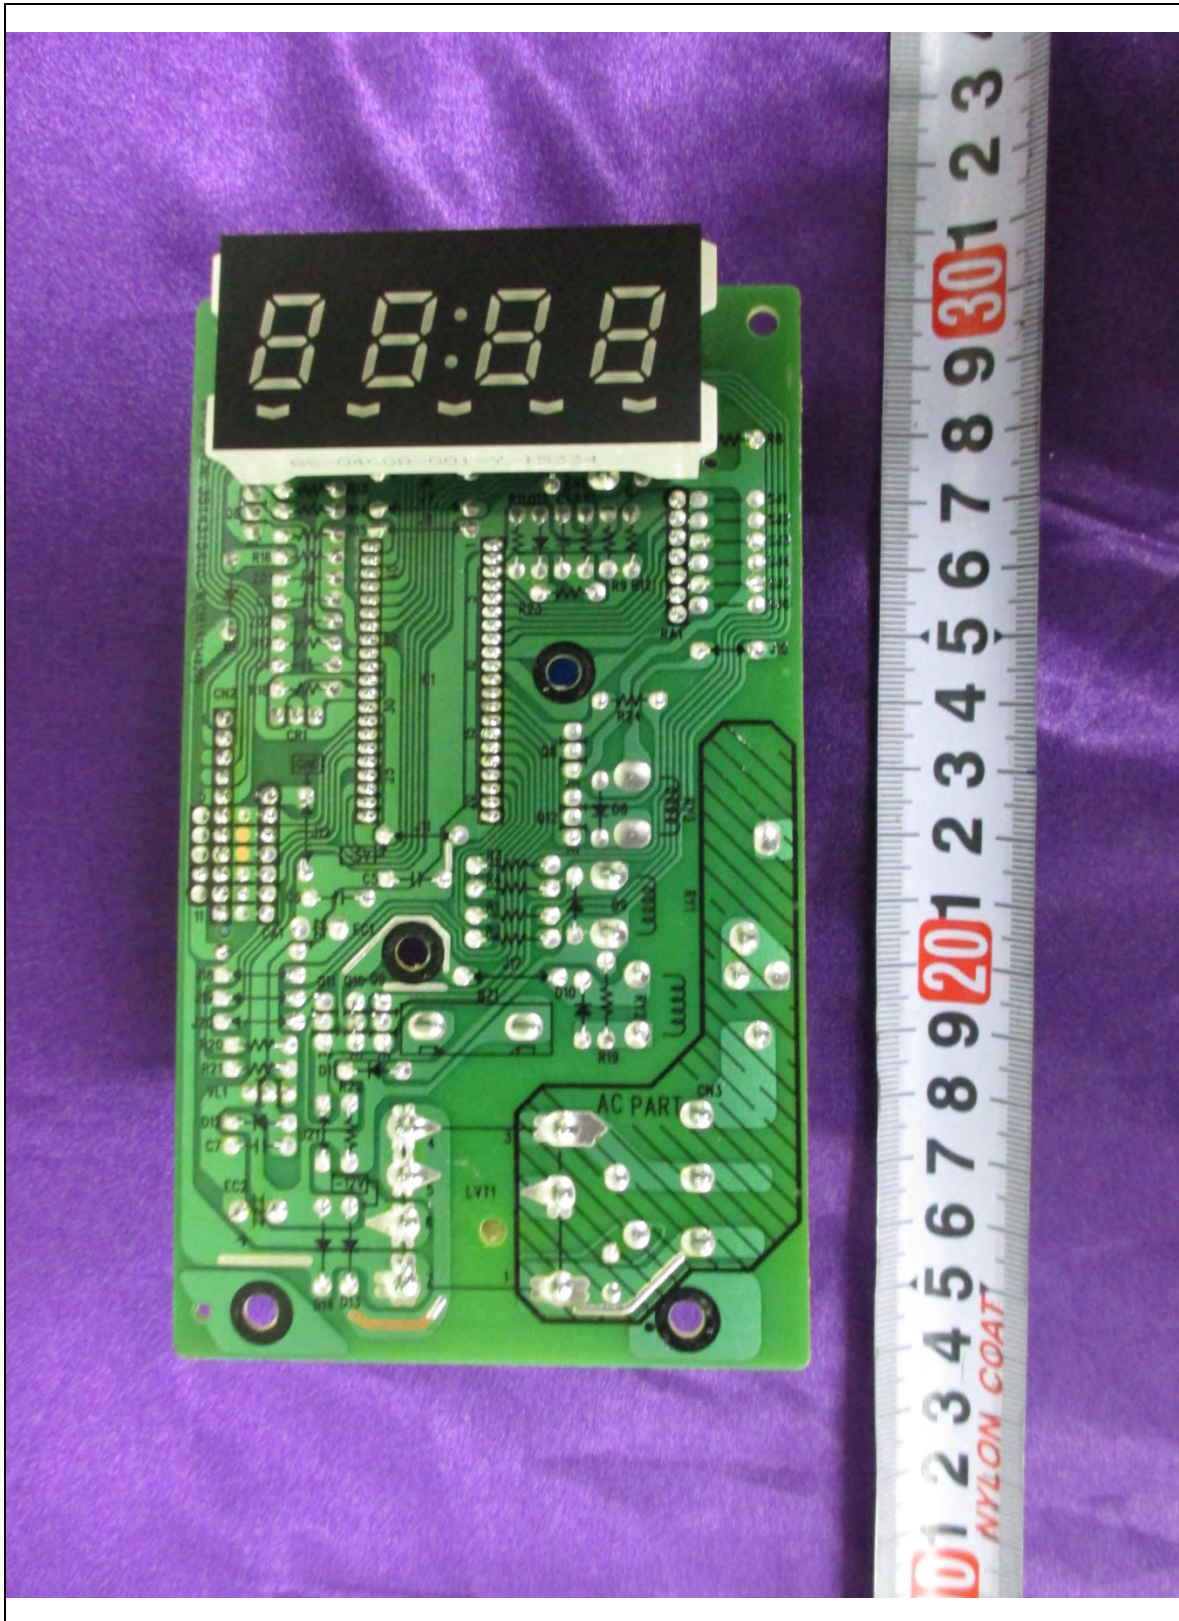

- Front View of SYNCHRONOUS MOTOR



- **Rear View of SYNCHRONOUS MOTOR**

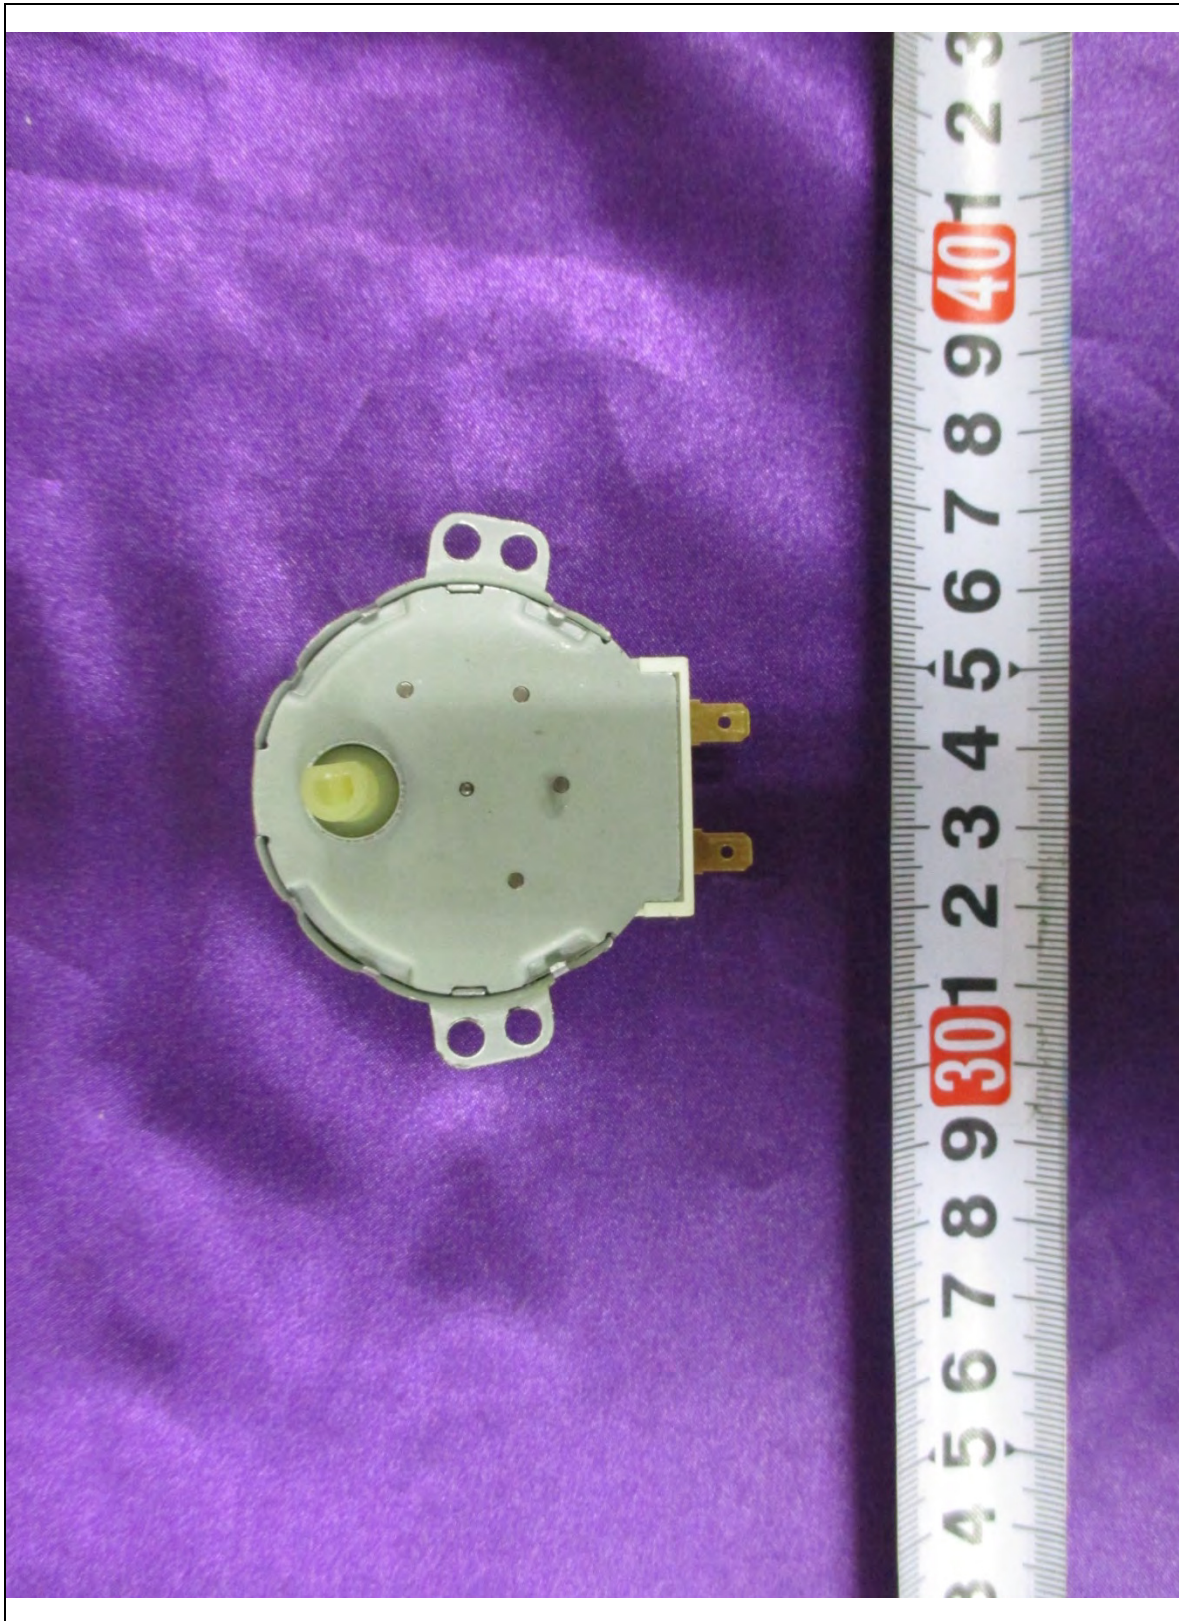

- Front View of Trans H.V.



## ***APPENDIX D – SCHEMATIC DIAGRAM***

---

## ***APPENDIX E – USER’S MANUAL***

---

## ***APPENDIX F – BLOCK DIAGRAM***

---