

Nemko Korea Co., Ltd.

155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 449-852 KOREA, REPUBLIC OF
TEL : + 82 31 330 1700 FAX : + 82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION**Applicant :**

Dongbu Daewoo Electronics Corporation
(Cheongcheon-dong), 12, Bupyeongbuk-ro
236 beon-gil, Bupyeong-gu, Incheon, Korea
Attn : Mr. Byungseok Kim

Dates of Issue : November 20, 2014

Test Report No. : NK-14-E-822

Test Site : Nemko Korea Co., Ltd.

EMC site, Korea

FCC ID

Trade Mark

Contact Person

C5F7NF1CMO900N**DAEWOO**

Dongbu Daewoo Electronics Corporation
(Cheongcheon-dong), 12, Bupyeongbuk-ro
236 beon-gil, Bupyeong-gu, Incheon, Korea
Mr. Byungseok Kim
Telephone No. : + 82 32 510 7919

Applied Standard:

FCC Part 18 & Part 2

Classification :

Consumer ISM equipment

EUT Type:

Microwave Oven

The device bearing the Trade Mark and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in MP-5:1986.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



November 20, 2014

Tested By : Sangyun Lee
Engineer



Nov 20, 2014

Reviewed By : Deokha Ryu
Technical Manager

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
EUT INFORMATION	5
DESCRIPTION OF TESTS (Radiation Hazard)	6
DESCRIPTION OF TESTS (Input Power Measurement)	6
DESCRIPTION OF TESTS (RF Output Power Measurement)	6
DESCRIPTION OF TESTS (Operating Frequency Measurements)	6
DESCRIPTION OF TESTS (Conducted Emissions)	7
DESCRIPTION OF TESTS (Radiated Emissions)	8
TEST DATA (Radiation Hazard)	9
TEST DATA (Input Power Measurement)	9
TEST DATA (RF Output Power Measurement)	9
TEST DATA (Operating Frequency Measurements)	10
TEST DATA (Conducted Emissions)	12
TEST DATA (Radiated Emissions)	15
PLOT OF EMISSIONS (Operating Frequency Measurements)	22
ACCURACY OF MEASUREMENT	42
LIST OF TEST EQUIPMENT	45
APPENDIX A - SAMPLE LABEL	46
APPENDIX B - PHOTOGRAPHS OF TEST SET-UP	47
APPENDIX C - EUT PHOTOGRAPHS	52
APPENDIX D - SCHEMATIC DIAGRAM	70
APPENDIX E - USER'S MANUAL	71
APPENDIX F - BLOCK DIAGRAM	72

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 18.

Responsible Party : Dongbu Daewoo Electronics Corporation

Contact Person : Mr. Byungseok Kim
Tel No.: + 82 32 510 7919

Manufacturer : Dongbu Daewoo Electronics Corporation
(Cheongcheon-dong), 12, Bupyeongbuk-ro 236 beon-gil,
Bupyeong-gu, Incheon, Korea

Factory : Dongbu Daewoo Microwave Oven (Tianjin) Co., Ltd.
NO. 34, CHANGHWA STREET, DAGANG DEVELOPMENT AREA,
BINHAI NEW DISTRICT, TIANJIN, 300270 CHINA

- FCC ID: C5F7NF1CMO900N
- Model: KOC-1C2R
- Trade Mark: DAEWOO
- EUT Type: Microwave Oven
- Applied Standard: FCC Part 18 & Part 2
- Test Procedure(s): MP-5:1986
- Dates of Test: October 01, 2014 to November 12, 2014
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK-14-E-822

INTRODUCTION

The measurement procedure described in MP5:1986 for Methods of Measurement of radiated, powerline conducted radio noise, frequency and power output was used in determining emissions emanating from **Dongbu Daewoo Electronics Corporation**
FCC ID : **C5F7NF1CMO900N, Microwave Oven.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory.**

The site address is 155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 449-852 KOREA, REPUBLIC OF

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to FCC Part 2.



Nemko Korea Co., Ltd.
155 & 159, Osan-Ro, Mohyeon-Myeon,
Cheoin-Gu, Yongin-Si, Gyeonggi-Do
449-852 KOREA, REPUBLIC OF
Tel) + 82 31 330 1700
Fax) + 82 31 322 2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.
The map also shows Nemko Korea Corporation Ltd. EMC Lab and Incheon Airport.

EUT INFORMATION

EUT Information

Type of appliance	Counter-top Type
Electric Rating :	a.c. 120 V, 60 Hz Single Phase
Magnetron Type :	2M254 (TOSHIBA)
Operating Frequency :	2450 MHz $\pm$ 50 MHz

DESCRIPTION OF TESTS

Radiation Hazard

A 700 ml water load was placed in the center of the oven.

The power setting was set to maximum power.

While the oven was operating, the Microwave Survey Meter probe was moved slowly around the door seams to check for leakage.

Input Power Measurement

A 700 ml water load was placed in the center of the oven and the oven set to maximum power. A 700 ml water load was chosen for its compatibility.

Input power and current were measured using a Power Analyzer.

Manufacturers to determine their input ratings commonly use this procedure.

Output Power Measurement

The Caloric Method was used to determine maximum output power.

The initial temperature of a 1000 ml water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 47 seconds. Then the temperature of the water re-measured.

Frequency Measurements

Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 percent to 125 percent of the nominal rating.

And the load quantity was reduced by evaporation to approximately 20 % of the original quantity with nominal rating.

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 m shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 0.5 m away from the side of wall of the shielded room Rohde & Schwarz (ESH2-Z5) of the 50 ohm / 50 uH Line Impedance Stabilization Network(LISN) is bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz (ESH2-Z5) LISN.

Power to the LISN s are filtered by high-current high insertion loss power line filters.

The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ".

If d.c. power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 m were shortened by non-inductive bundling (serpentine fashion) to a 1 m length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 20 ms sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCI).

The detector functions were set to quasi-peak mode & average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux a.c. outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

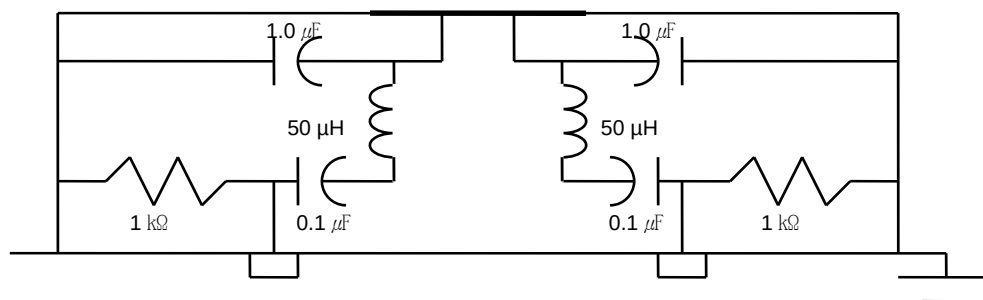


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Measurement were made indoors at 10 m & 3 m using antenna, signal conditioning unit and EMI test receiver to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 0.15 MHz to 30 MHz using Loop Antenna (R&S/HFH2-Z2) and from 30 MHz to 1000 MHz using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163).

Above 1 GHz, Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) was used.

Final Measurements were made indoors at 3 m using Loop Antenna (R&S/HFH2-Z2) for measurement from 0.15 to 30 MHz with RBW 9 kHz & VBW 9 kHz and made indoor at 10 m using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163) for measurement from 30 MHz to 1000 MHz with RBW 100 kHz & VBW 100 kHz and made indoors at 3 m using Double Ridged Broadband Horn antenna (Schwarzbeck, BBHA 9120 D) for measurement from 1 GHz to 18 GHz with RBW 1 MHz & VBW 10 Hz.

The detector function were set to quasi peak mode and the bandwidth of the receiver were set to 9 kHz, 100 kHz and peak mode 1 MHz depending on the frequency or type of signal.

The Double Ridged Broadband Horn antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re-configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non- metallic 1.0 X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The EUT is rotated about its vertical axis on the turntable, and the polarization and height of the receiving antenna are varied to obtain the highest field strength on the particular frequency under observation.

Each EME reported was calibrated using the R/S signal generator.

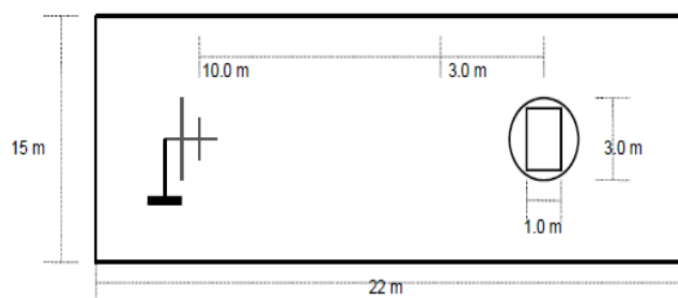


Fig. 3. Dimensions of 10 semi anechoic chamber

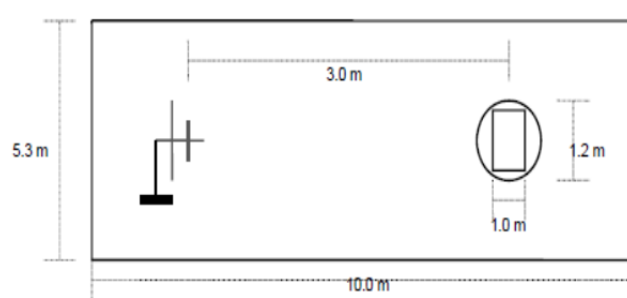


Fig. 4. Dimensions of 3 m full anechoic chamber

TEST DATA

Radiation Hazard

Probe Location	Maximum Leakage [mW/Cm2]	Limit [mW/Cm2]
A	0.1	1.00
B	0.05	1.00
C	0.05	1.00
All others	0.05	1.00

Input Power Measurement

Operation mode	P rated (W)	P (W)	dP (%)	Required dP (%)
Power Input	1600	1612	0.75	+ 15 %

RF Output Power Measurement

Quantity of Water [ml]	Starting Temperature [Centigrade]	Final Temperature [Centigrade]	Temp. Rise	Elapsed Time [seconds]	RF Power [watts]
1000	10	20.2	10.2	47	909

$$\text{RF Power} = \frac{(4.187 \text{ Joules/Cal}) \times (\text{Volume in ml}) \times (\text{Temp. Rise})}{\text{Time in seconds}}$$



Tested by : Sangyun Lee

TEST DATA

Operating Frequency measurements

► Frequency vs Line Voltage Variation Test

[Room Temperature : 17.1 °C]

Line Voltage Variation (a.c. V)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
96	H	Lower : 2437.4	Lower : 2400 MHz Upper : 2500 MHz
	H	Upper : 2475.2	
	V	Lower : 2443.4	
	V	Upper : 2474.6	
108	H	Lower : 2439.8	
	H	Upper : 2473.4	
	V	Lower : 2444.6	
	V	Upper : 2475.8	
120	H	Lower : 2436.2	
	H	Upper : 2474.6	
	V	Lower : 2440.4	
	V	Upper : 2470.4	
132	H	Lower : 2441.0	
	H	Upper : 2475.2	
	V	Lower : 2439.2	
	V	Upper : 2472.2	
150	H	Lower : 2437.4	
	H	Upper : 2473.4	
	V	Lower : 2439.2	
	V	Upper : 2472.2	

NOTE :

1. *Pol. H = Horizontal V = Vertical
2. Initial load : 1000 ml of water in the beaker.
3. Line voltage varied from a.c. 96 V to a.c. 150 V.
4. ISM Frequency : 2450 MHz, Tolerance : ± 50 MHz

RESULT : Pass



Tested by : Sangyun Lee

TEST DATA

► Frequency vs Load Variation Test

[Room Temperature : 17.1 °C]

Volume of water (ml)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
200	H	Lower : 2443.4	Lower : 2400 MHz Upper : 2500 MHz
	H	Upper : 2477.6	
	V	Lower : 2456.6	
	V	Upper : 2487.8	
400	H	Lower : 2423.0	
	H	Upper : 2484.8	
	V	Lower : 2433.2	
	V	Upper : 2483.6	
600	H	Lower : 2436.2	
	H	Upper : 2480.0	
	V	Lower : 2439.2	
	V	Upper : 2482.4	
800	H	Lower : 2440.4	
	H	Upper : 2476.4	
	V	Lower : 2436.8	
	V	Upper : 2473.4	
1000	H	Lower : 2444.0	
	H	Upper : 2475.2	
	V	Lower : 2446.4	
	V	Upper : 2477.6	

NOTE :

1. *Pol. H = Horizontal, V = Vertical
2. The water load was varied between 200 ml to 1000 ml.
3. Frequency was measured by using nominal voltage (a.c. 120 V).
4. ISM Frequency : 2450 MHz, Tolerance : ± 50 MHz

RESULT : Pass




Tested by : Sangyun Lee

TEST DATA

Conducted Emissions

FCC ID : C5F7NF1CMO900N

[Room Temperature : 20.5 °C]

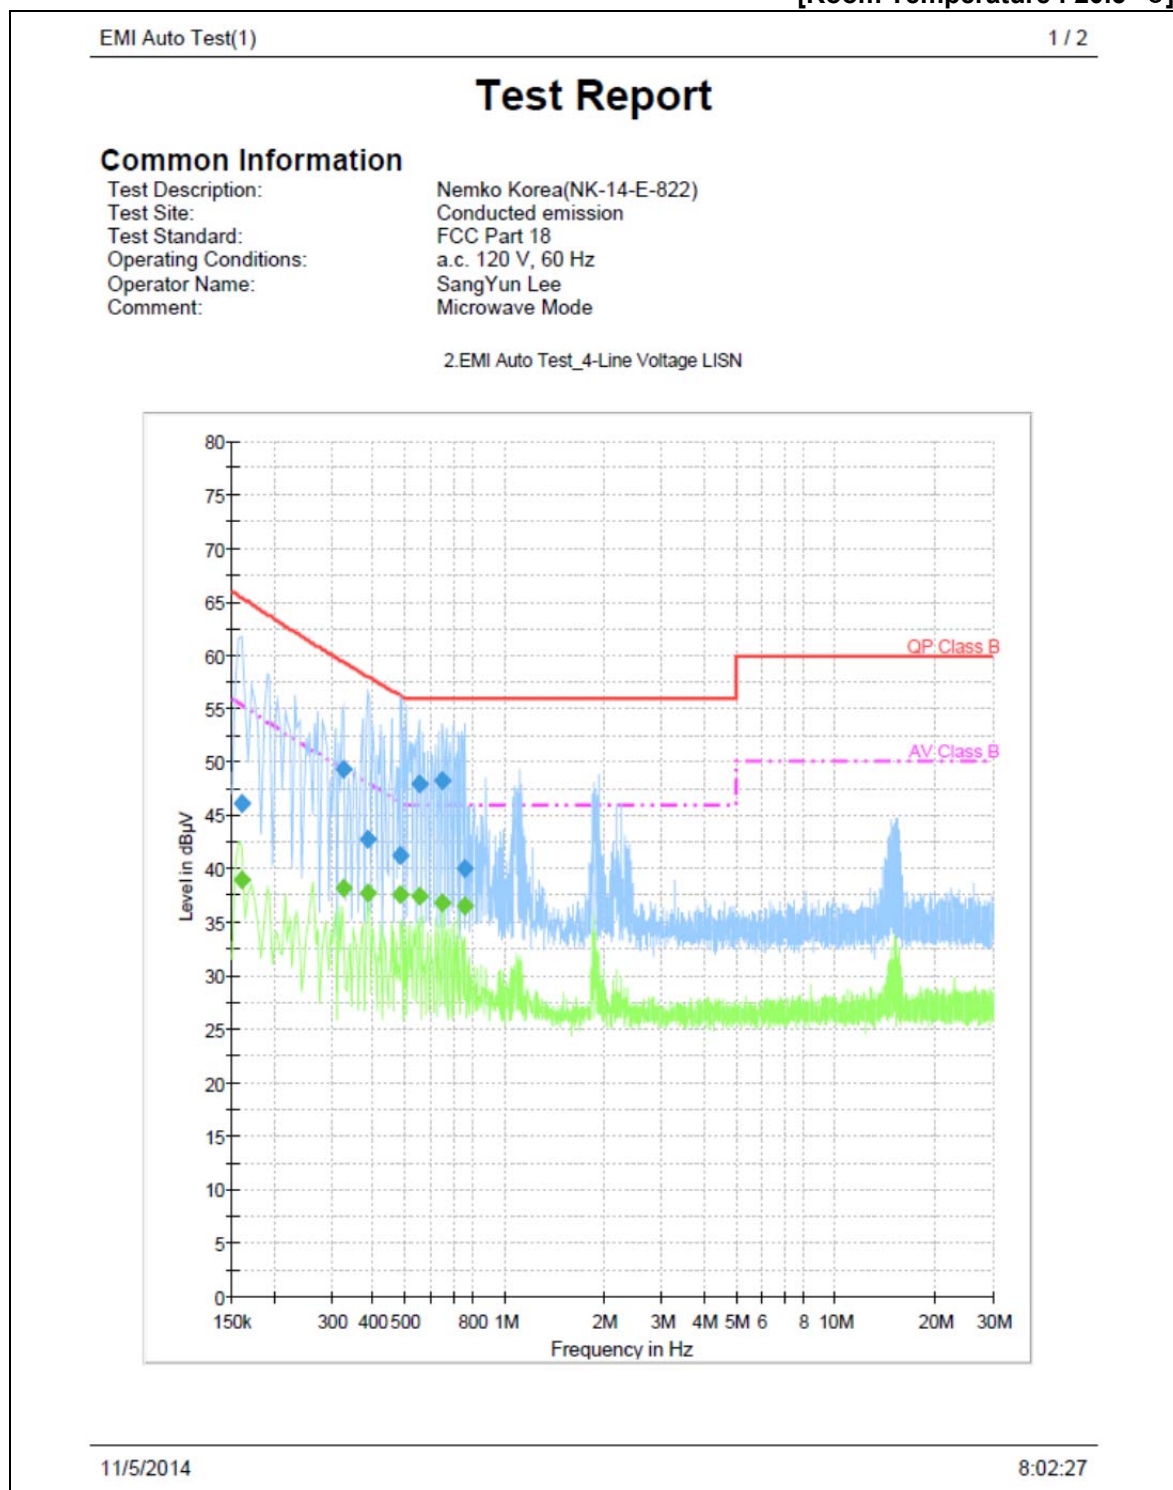

EMI Auto Test(1)

2 / 2

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.161194	46.1	15000.0	9.000	GND	L1	10.5	19.2	65.4	
0.325369	49.3	15000.0	9.000	GND	N	10.5	10.1	59.4	
0.385069	42.7	15000.0	9.000	GND	L1	10.5	15.3	58.0	
0.485812	41.2	15000.0	9.000	GND	L1	10.5	15.1	56.2	
0.552975	47.9	15000.0	9.000	GND	L1	10.5	8.1	56.0	
0.649988	48.2	15000.0	9.000	GND	L1	10.5	7.8	56.0	
0.761925	40.0	15000.0	9.000	GND	L1	10.5	16.0	56.0	

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.161194	38.9	15000.0	9.000	GND	L1	10.5	16.4	55.3	
0.325369	38.2	15000.0	9.000	GND	N	10.5	11.2	49.3	
0.385069	37.7	15000.0	9.000	GND	N	10.5	10.3	48.0	
0.485812	37.5	15000.0	9.000	GND	L1	10.5	8.7	46.2	
0.552975	37.5	15000.0	9.000	GND	L1	10.5	8.5	46.0	
0.649988	36.9	15000.0	9.000	GND	N	10.5	9.1	46.0	
0.761925	36.5	15000.0	9.000	GND	N	10.5	9.5	46.0	

11/5/2014

8:02:27

NOTES:

- 1. Measurements using quasi-peak mode & average mode.**
- 2. If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.**
- 3. Line : L = Line , N = Neutral**
- 4. The limit for consumer device is on the FCC Part section 18.307(b).**

A handwritten signature in blue ink, appearing to read 'Sangyun Lee', is positioned above a horizontal line.

Tested by : **Sangyun Lee**

TEST DATA

Radiated Emissions (150 kHz to 30 MHz)

FCC ID : C5F7NF1CMO900N

[Room Temperature : 20.3 °C]

Test

1 / 1


Test Report

Common Information

Test Description: Radiated Emission (NK-14-E-822)
 Test Site: Nemko 3 m Chamber
 Test Standard: FCC Part 18
 Environment Conditions: a.c. 120 V, 60 Hz (Horizontal)
 Operator Name: Sangyun.Lee
 Comment: MODEL : KOC-1C2R

6. Electric Field Strength (9K-30M)

6. Electric Field Strength (9K-30M)

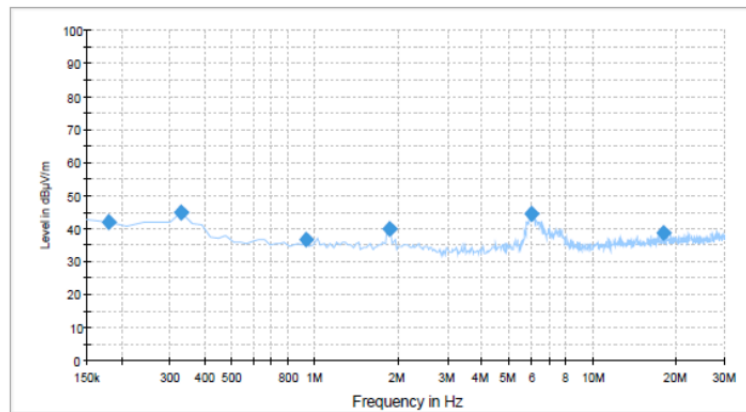

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBµV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
0.179850	42.0	H	210.0	-6.5	
0.329100	44.8	H	225.0	-6.5	
0.926100	36.6	H	195.0	-6.5	
1.851450	40.0	H	270.0	-6.5	
6.030450	44.4	H	300.0	-6.4	
18.030150	38.7	H	135.0	-1.5	

11/4/2014

4:14:23

<Radiated Measurements at 3 meters, Horizontal>

Test

1 / 1


Test Report

Common Information

Test Description: Radiated Emission (NK-14-E-822)
 Test Site: Nemko 3 m Chamber
 Test Standard: FCC Part 18
 Environment Conditions: a.c. 120 V, 60 Hz (Vertical)
 Operator Name: Sangyun.Lee
 Comment: MODEL : KOC-1C2R

6. Electric Field Strength (9K-30M)

6. Electric Field Strength (9K-30M)

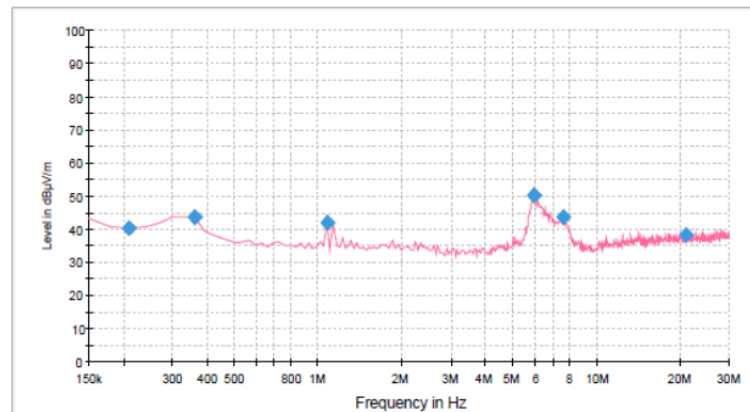

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBμV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
0.209700	40.3	V	195.0	-6.5	
0.358950	43.5	V	315.0	-6.5	
1.075350	42.1	V	180.0	-6.5	
5.970750	50.3	V	240.0	-6.4	
7.552800	43.6	V	45.0	-6.3	
20.985300	38.2	V	315.0	0.5	
---	---		---	---	

11/4/2014

4:28:28

<Radiated Measurements at 3 meters, Vertical>

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300 / 3) = 40 \text{ dBuV/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT} (\text{RF Power} / 500))$
5. All other emissions were measured while a 700 $\text{m}\ell$ load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.

A handwritten signature in blue ink, appearing to read 'Sangyun Lee', is positioned above a horizontal line.

Tested by : **Sangyun Lee**

TEST DATA

Radiated Emissions (30 MHz to 1 GHz)

FCC ID : C5F7NF1CMO900N

[Room Temperature : 20.5 °C]

Test


1 / 2

Test Report

Common Information

Test Description:	Radiated Emission(NK-14-E-822)
Test Site:	Nemko 10m Chamber
Test Standard:	FCC Part 18
Environment Conditions:	a.c. 120 V, 60 Hz
Operator Name:	SangYun, Lee
Comment:	Microwave Mode

1. Electric Field Strength (30M-1GHz)_final

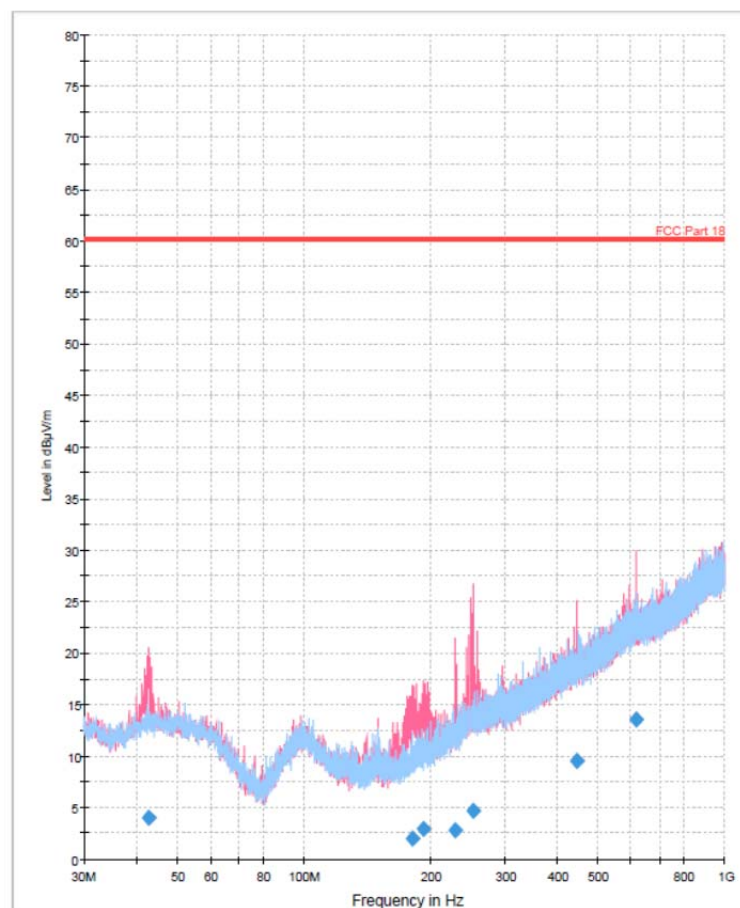

11/5/2014

8:36:37

Test

2 / 2

Final Result 1

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
42.804000	4.0	15000.0	120.000	203.0	V	-30.0	-22.3	56.1	60.1
181.611000	2.0	15000.0	120.000	123.0	V	43.0	-25.3	58.1	60.1
191.990000	3.0	15000.0	120.000	100.0	V	8.0	-24.8	57.1	60.1
229.577500	2.8	15000.0	120.000	330.0	V	16.0	-22.4	57.3	60.1
252.178500	4.7	15000.0	120.000	100.0	V	-19.0	-20.9	55.4	60.1
445.742000	9.6	15000.0	120.000	400.0	V	-26.0	-14.7	50.5	60.1
615.589000	13.5	15000.0	120.000	212.0	V	335.0	-10.3	46.6	60.1

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
42.804000	
181.611000	
191.990000	
229.577500	
252.178500	
445.742000	
615.589000	

11/5/2014

8:36:37

<Radiated Measurements at 10 meters>

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Distance Correction factor : $20 * \log (300/10) \doteq 29.5 \text{ dB } \mu\text{V/m}$
4. The limit at 300 meters is $20 * \log (25 * \text{SQRT} (\text{RF Power}/500))$
5. All other emissions were measured while a 700 $\text{m}\ell$ load was placed in the center of the oven.
6. The limit for consumer device is on the FCC Part section 18.305.

A handwritten signature in blue ink, appearing to read 'Sangyun Lee', is positioned above a horizontal line.

Tested by : **Sangyun Lee**

TEST DATA

Radiated Emissions (Above 1 GHz)

FCC ID : C5F7NF1CMO900N

[Room Temperature : 17.1 °C]

Frequency (MHz)	Pol* (H/V)	Antenna Heights (cm)	Turntable Angles (°)	Reading Level (dBμV)	Total Loss** (dB)	Result at 3 m		K	Results at 300 m	Limits at 300 m
						(dBμV/m)	(μV/m)		(μV/m)	(μV/m)
2278.75	V	130	90	13.7	31.5	45.2	182.0	0.005	0.9	33.7
2389.66	V	160	330	-6.7	31.9	25.2	18.2	0.006	0.1	33.7
2485.94	V	130	300	-7.2	32.2	25.0	17.8	0.006	0.1	33.7
3875.37	H	130	60	34.9	0.9	35.8	61.7	0.009	0.6	33.7
4943.60	V	190	0	18.6	4.6	23.2	14.5	0.01	0.1	33.7
7418.40	H	190	60	5.0	12.1	17.1	7.2	0.01	0.1	33.7
8002.10	V	190	0	9.8	13.8	23.6	15.1	0.01	0.2	33.7
8640.87	V	130	0	6.5	14.6	21.1	11.4	0.01	0.1	33.7

<Radiated Measurements at 3 meters>

NOTES:


- * Pol. H =Horizontal V=Vertical
- ** Total Loss = Antenna Factor + Cables Loss + Amplifier + HPF (High Pass Filter)
- Field Strength (at 300 m) (uV/m) = $K * 10^{[Fieldstrength\ at\ 3\ m\ (dBuV/m) / 20]}$
- The limit at 300 meters is $25 * \sqrt{RF\ Power/500}$
- Load for measurement of radiation on second and third harmonic : Two loads, one of 700 ml and the other of 300 ml, of water were used. Each load was tested both with the beaker located in the center of the oven and with it in the corner.
- The test was performed at peak detector mode with average.
- The limit for consumer device is on the FCC Part section 18.305.



Tested by : Sangyun Lee

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

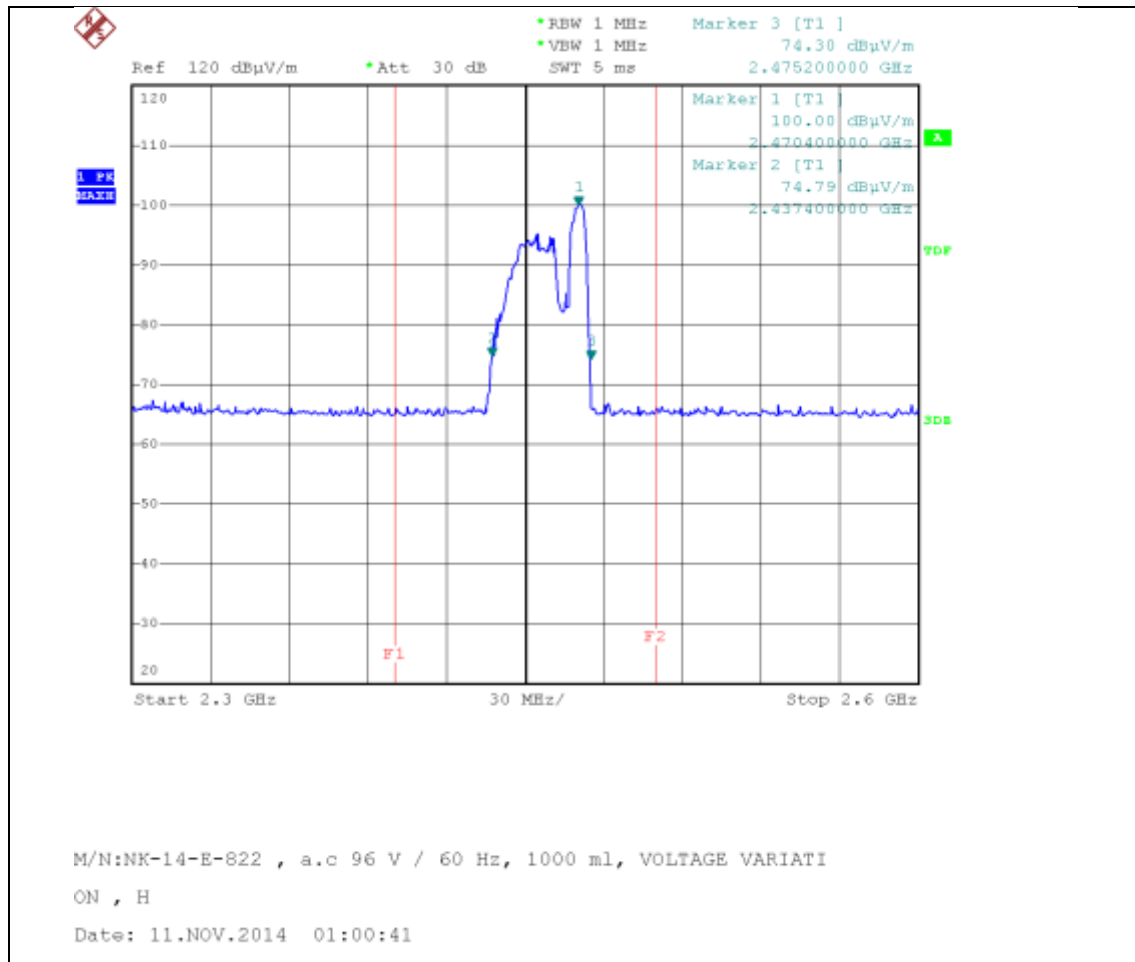

Horizontal (96 V, 1000 ml)

PLOTS OF EMISSIONS


● Frequency vs Line Voltage Variation Test

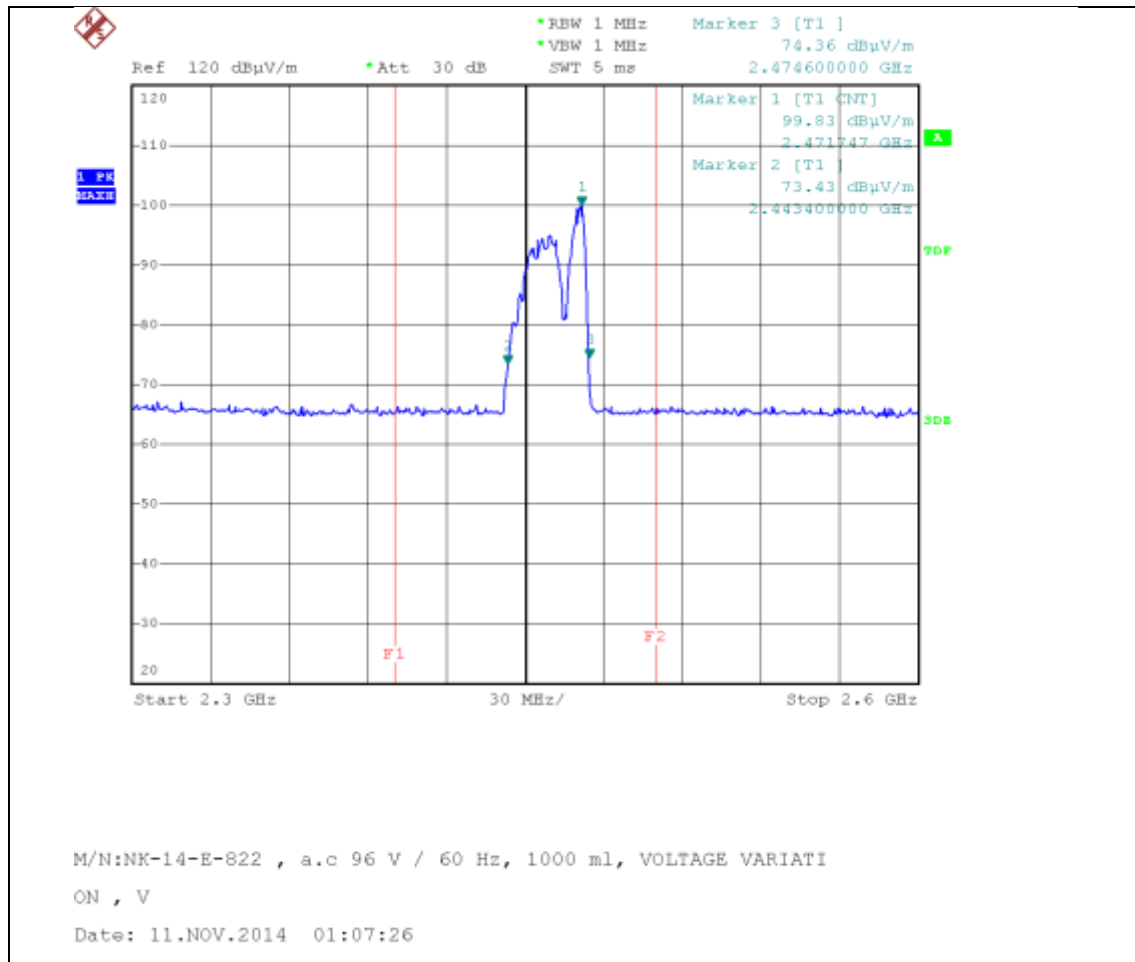

Vertical (96 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

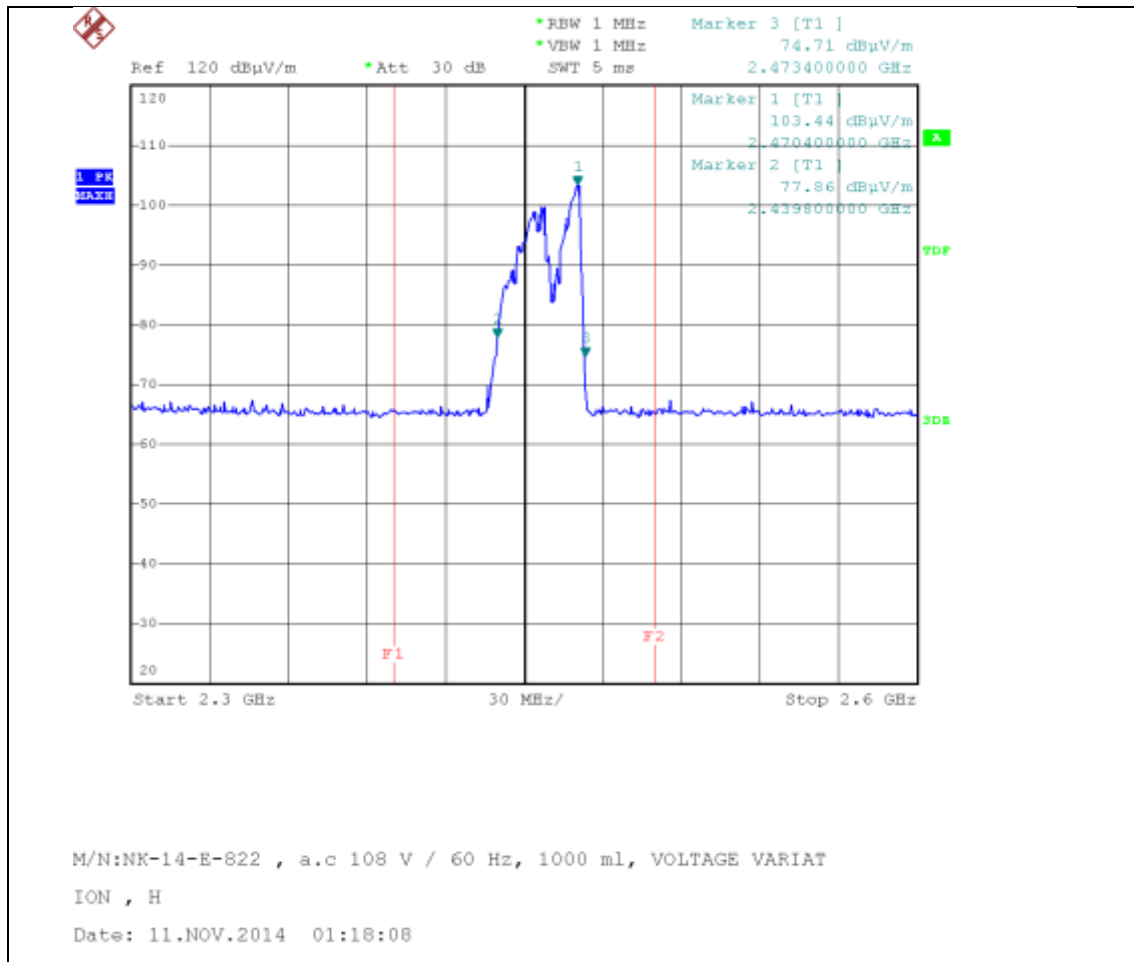

Horizontal (108 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

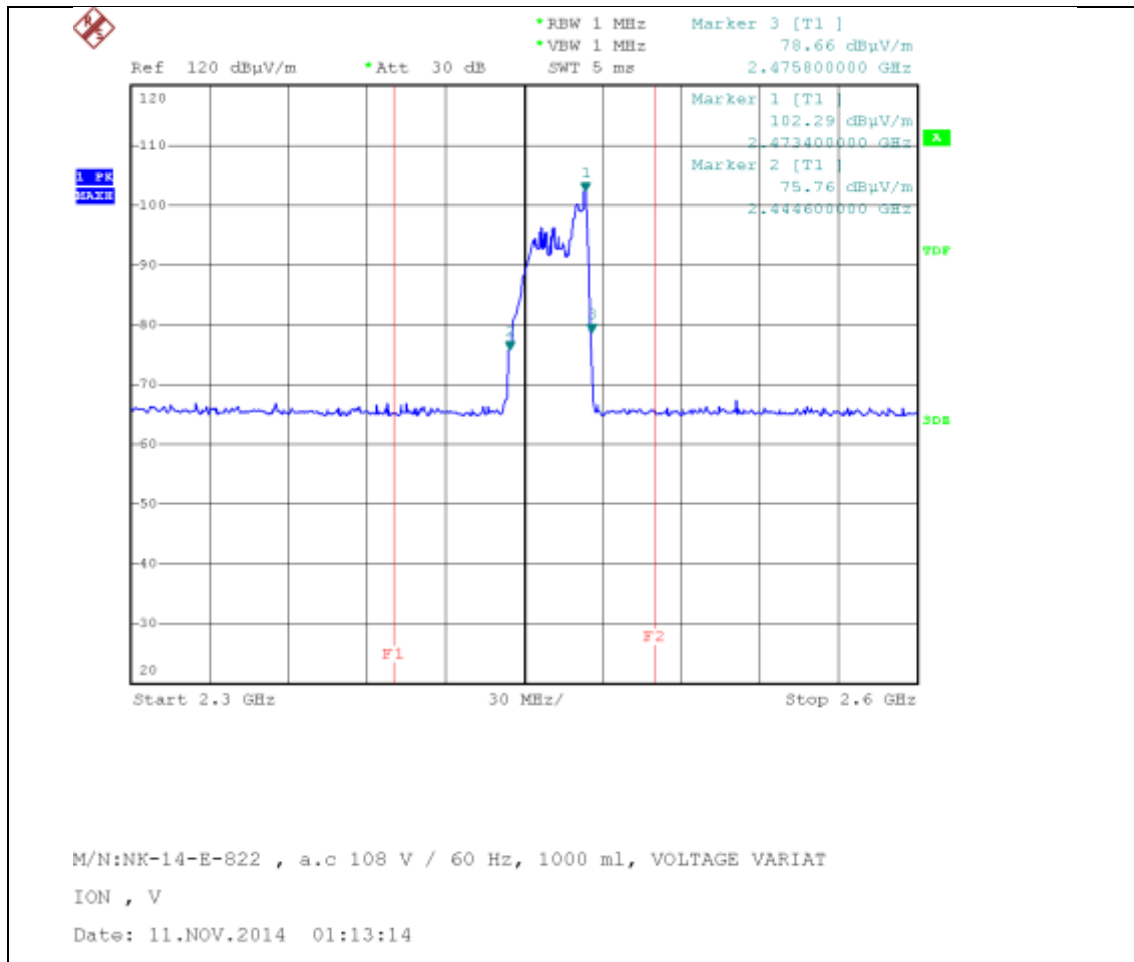

Vertical (108 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

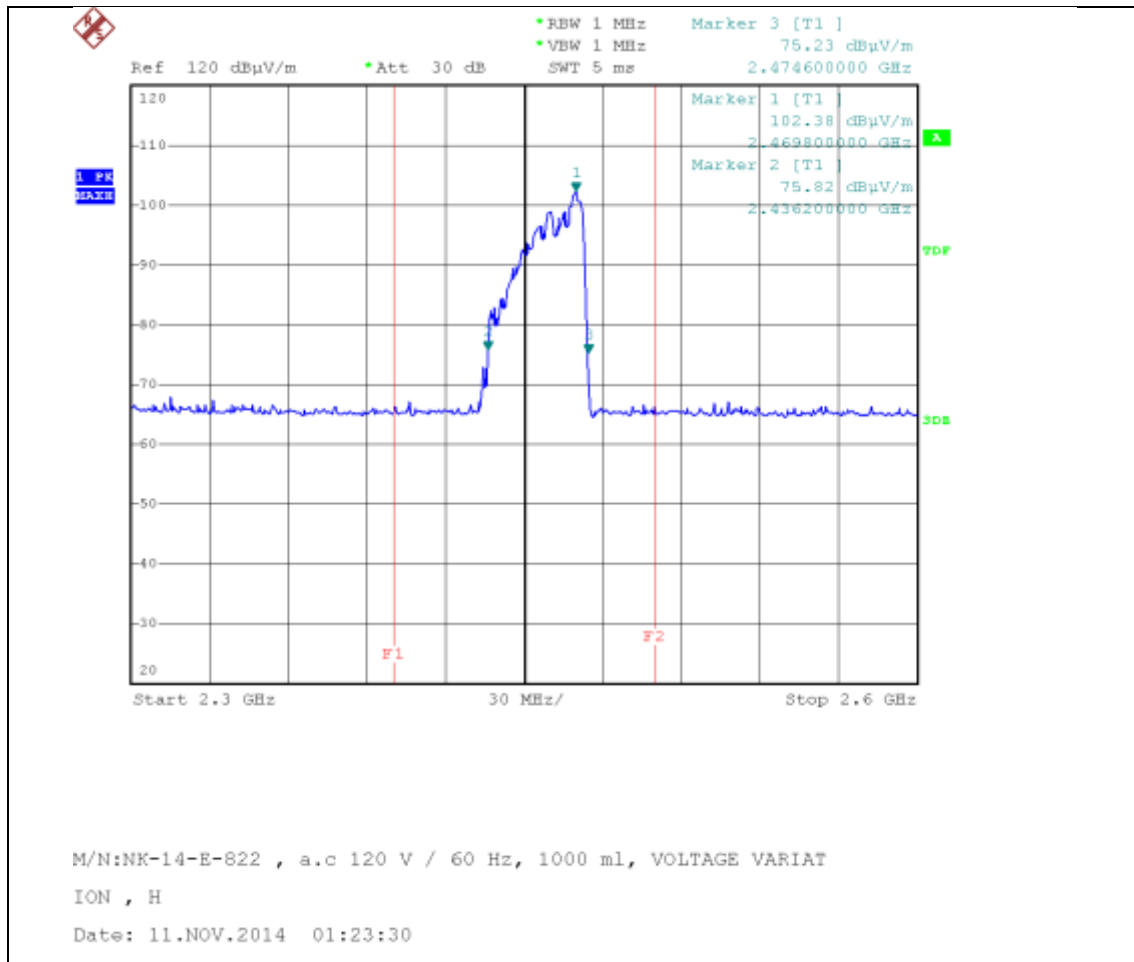

Horizontal (120 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

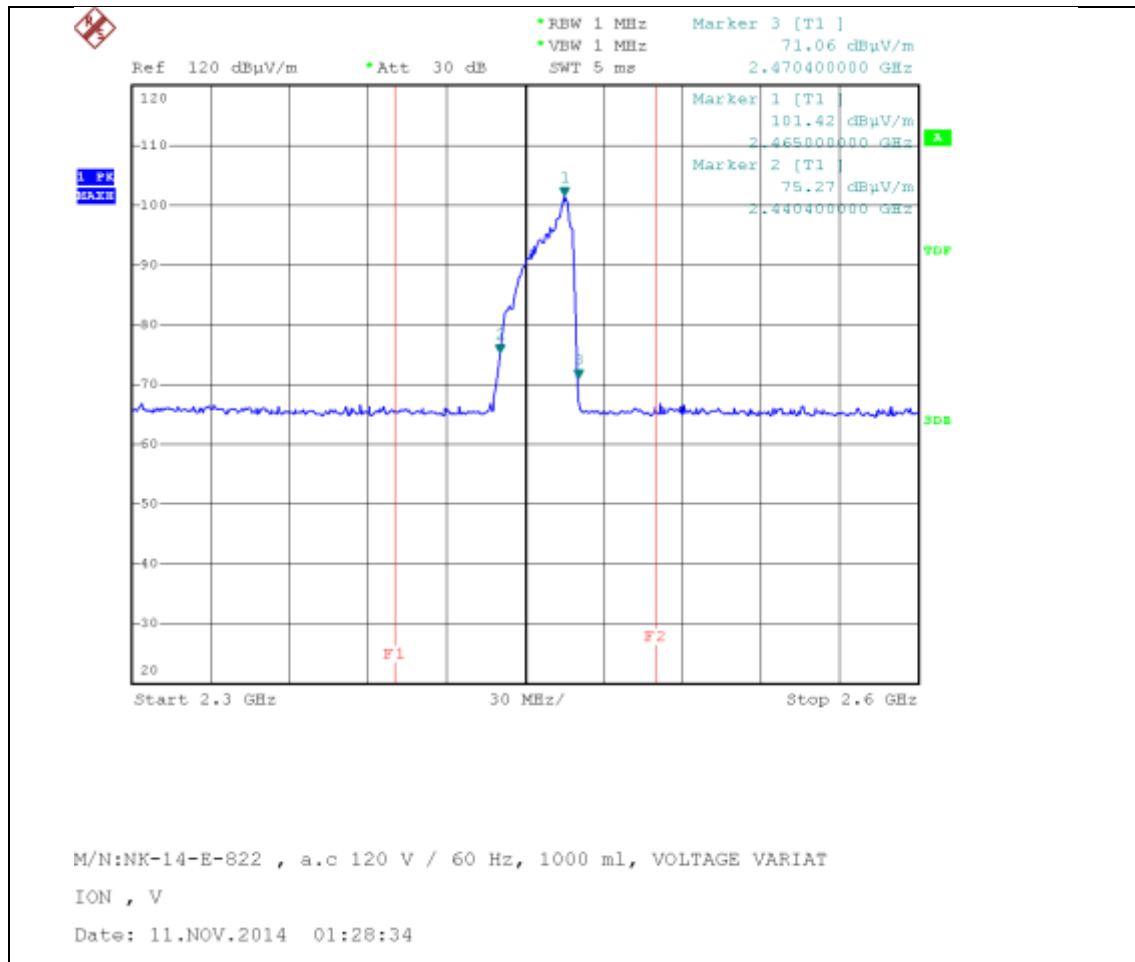

Vertical (120 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

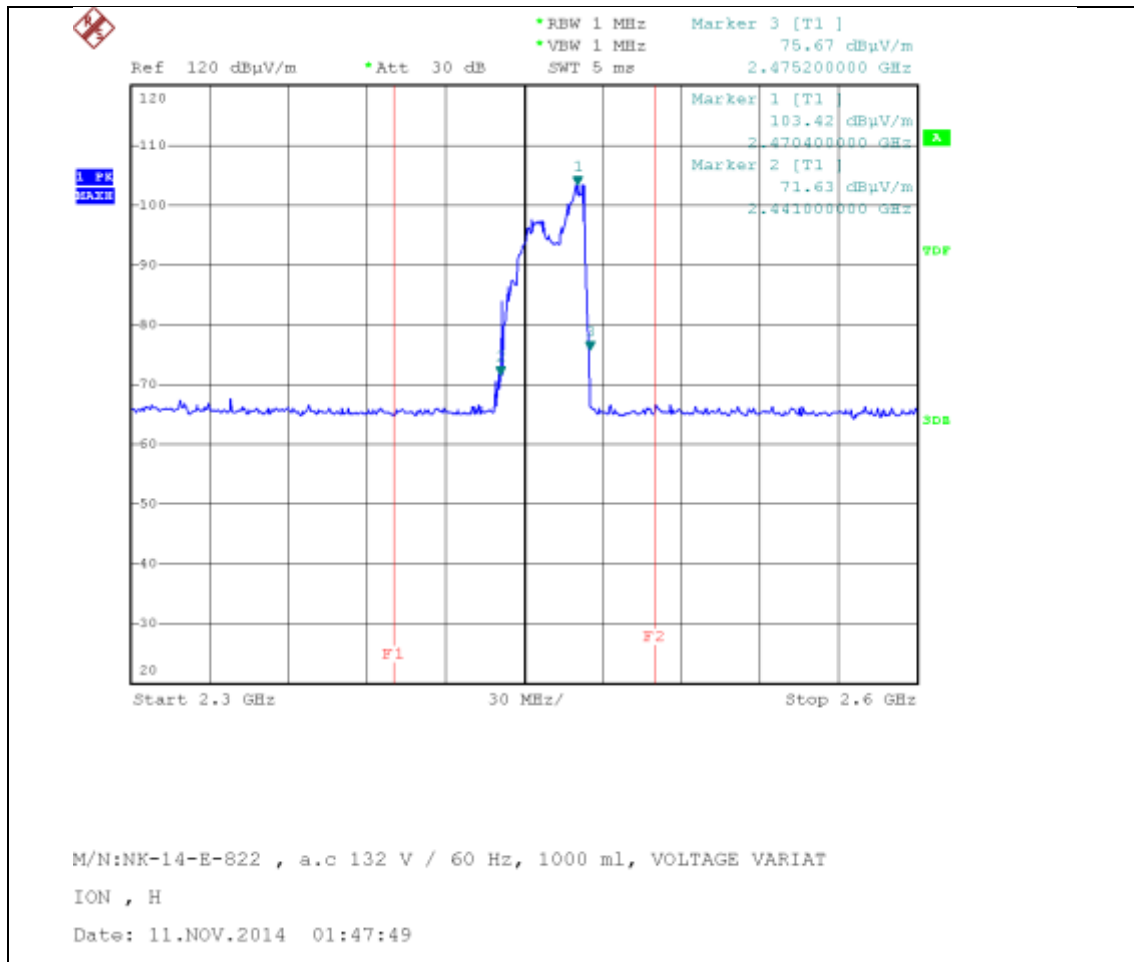

Horizontal (132 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

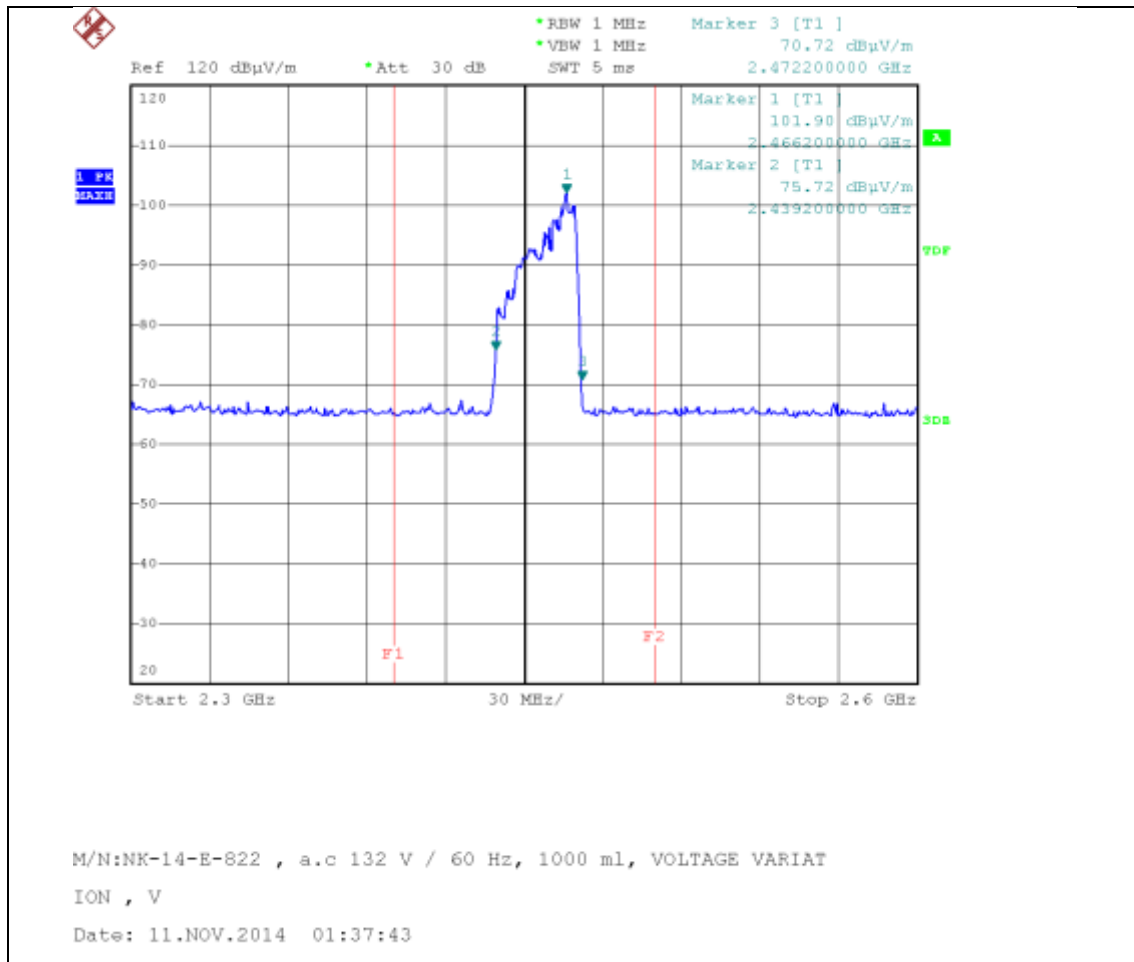

Vertical (132 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

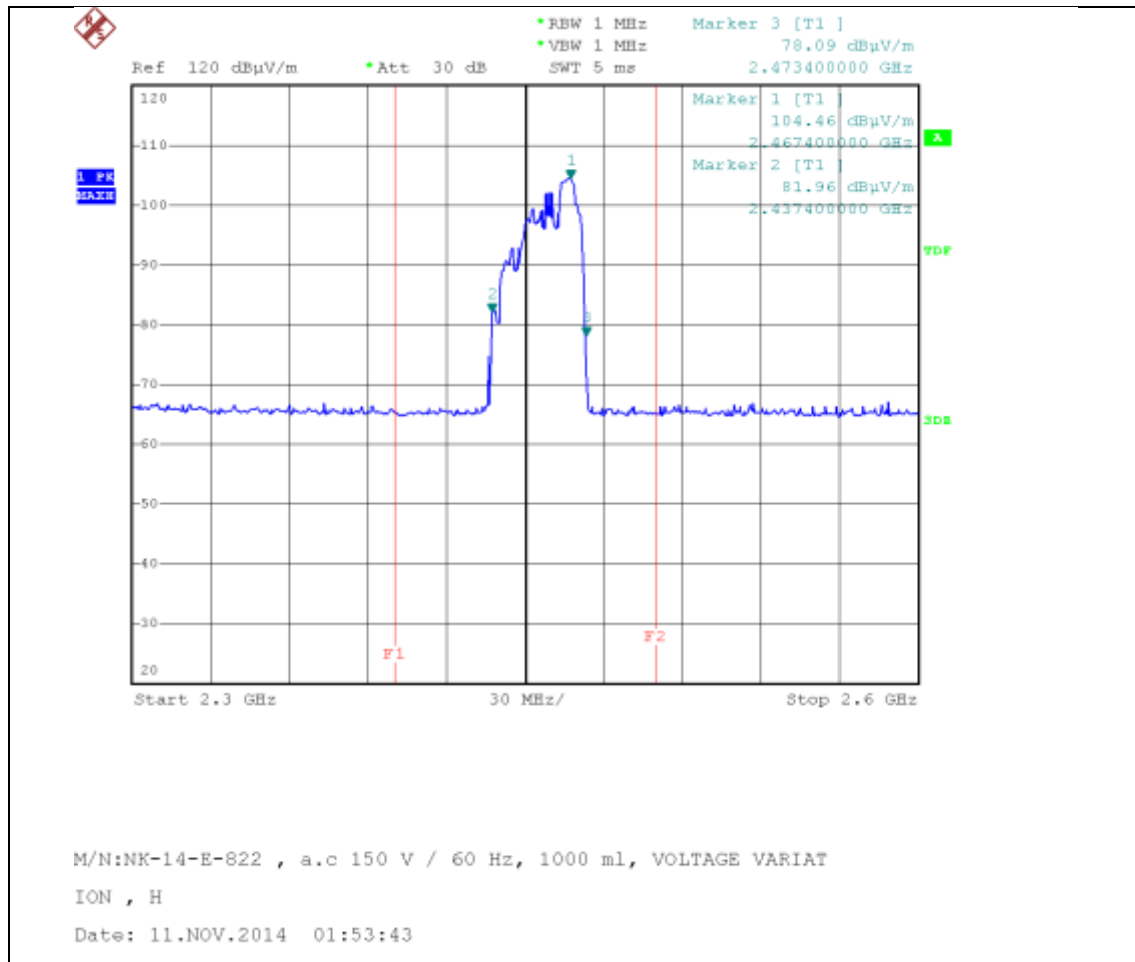

Horizontal (150 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

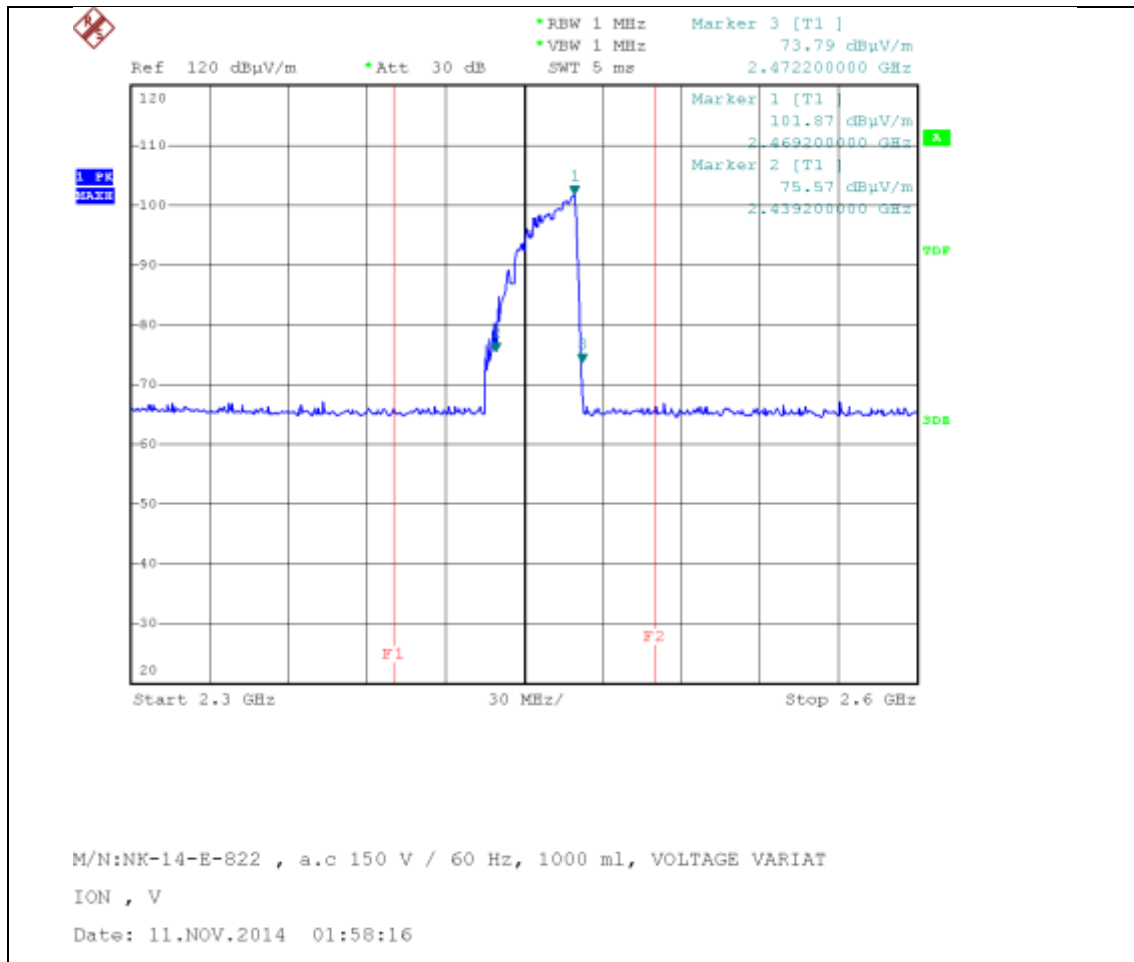

Vertical (150 V, 1000 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

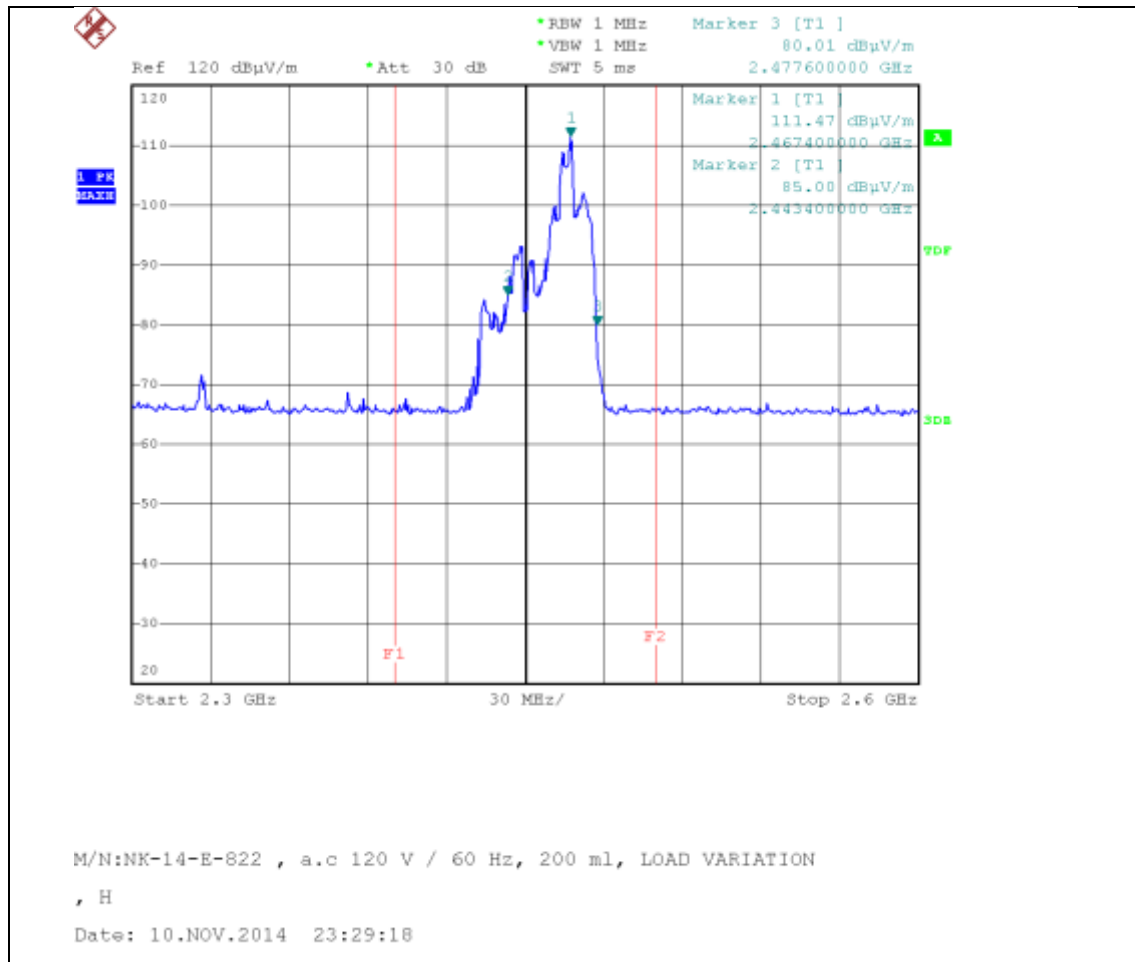

Horizontal (120 V, 200 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

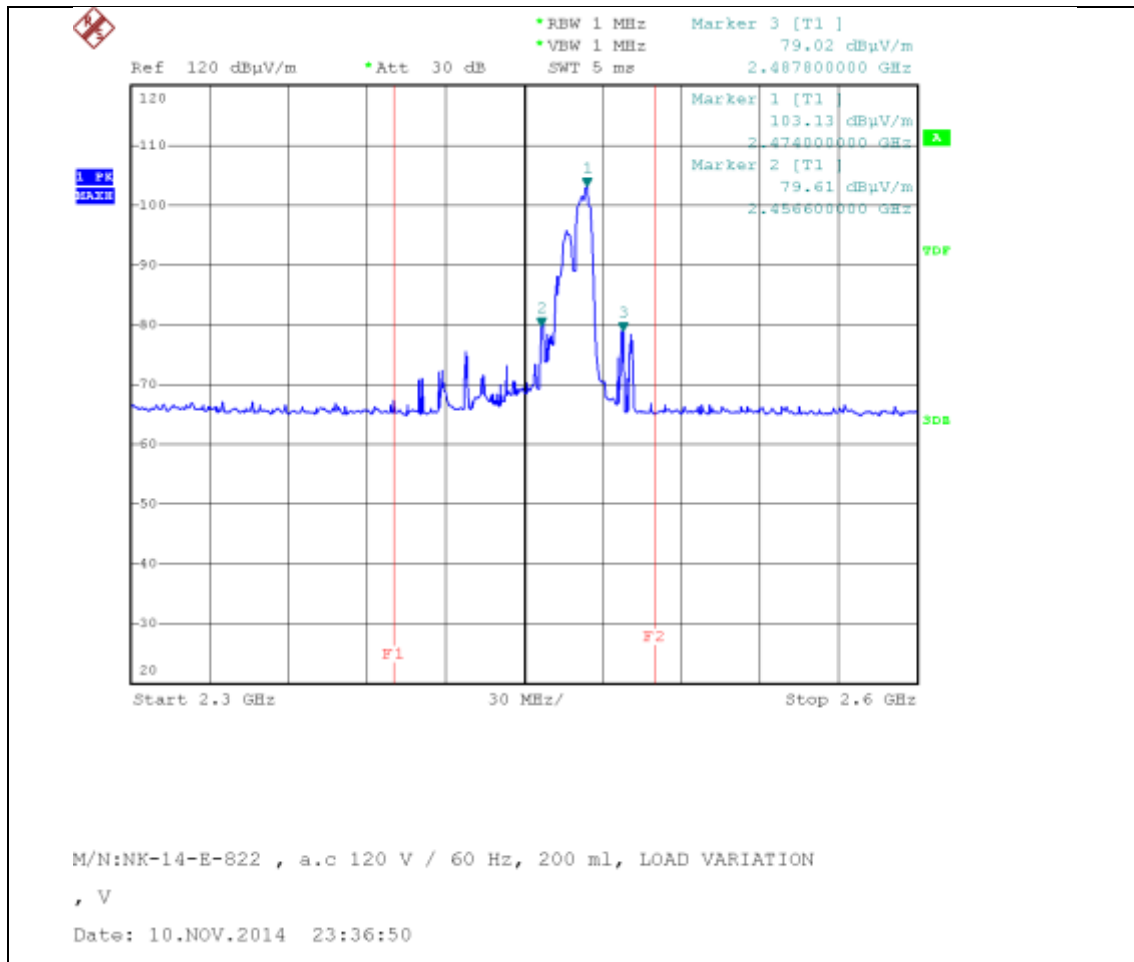

Vertical (120 V, 200 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

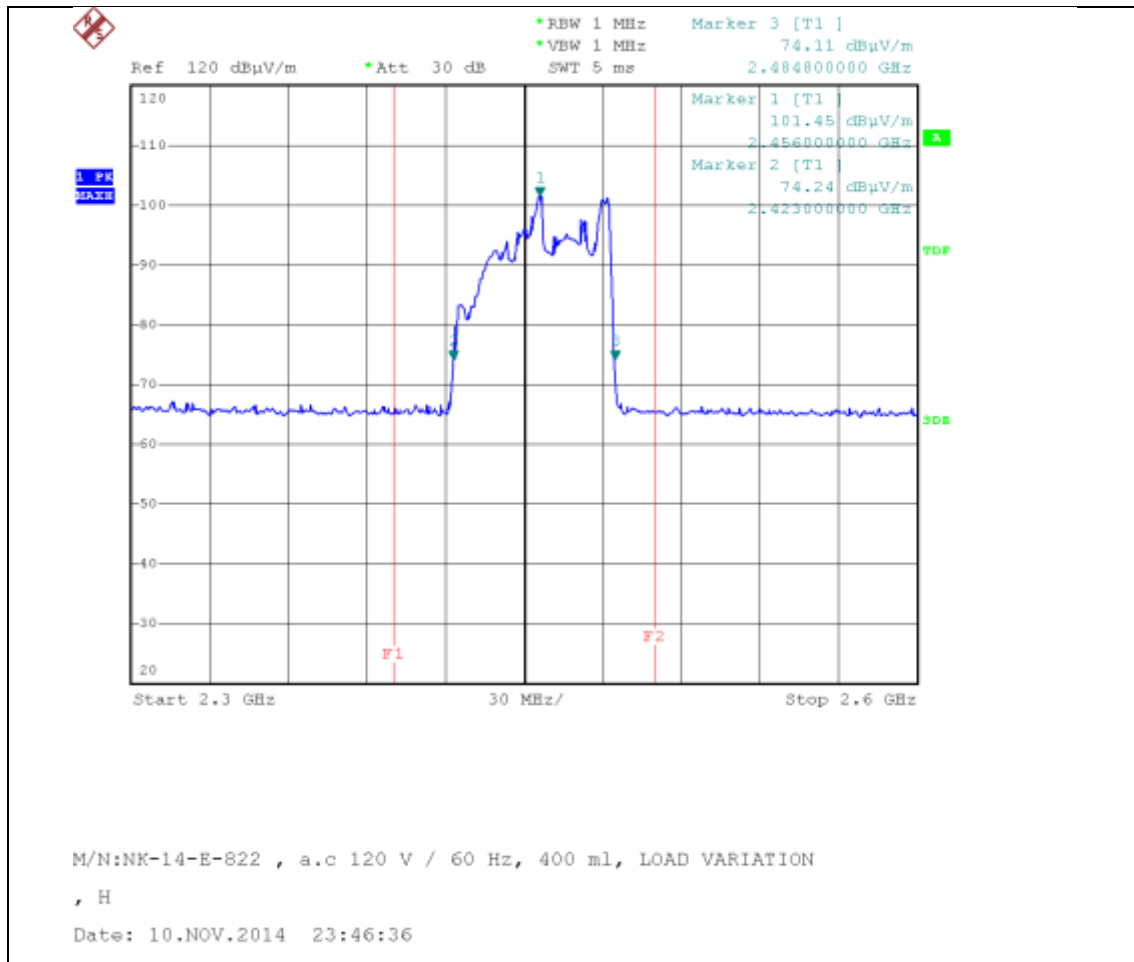

Horizontal (120 V, 400 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

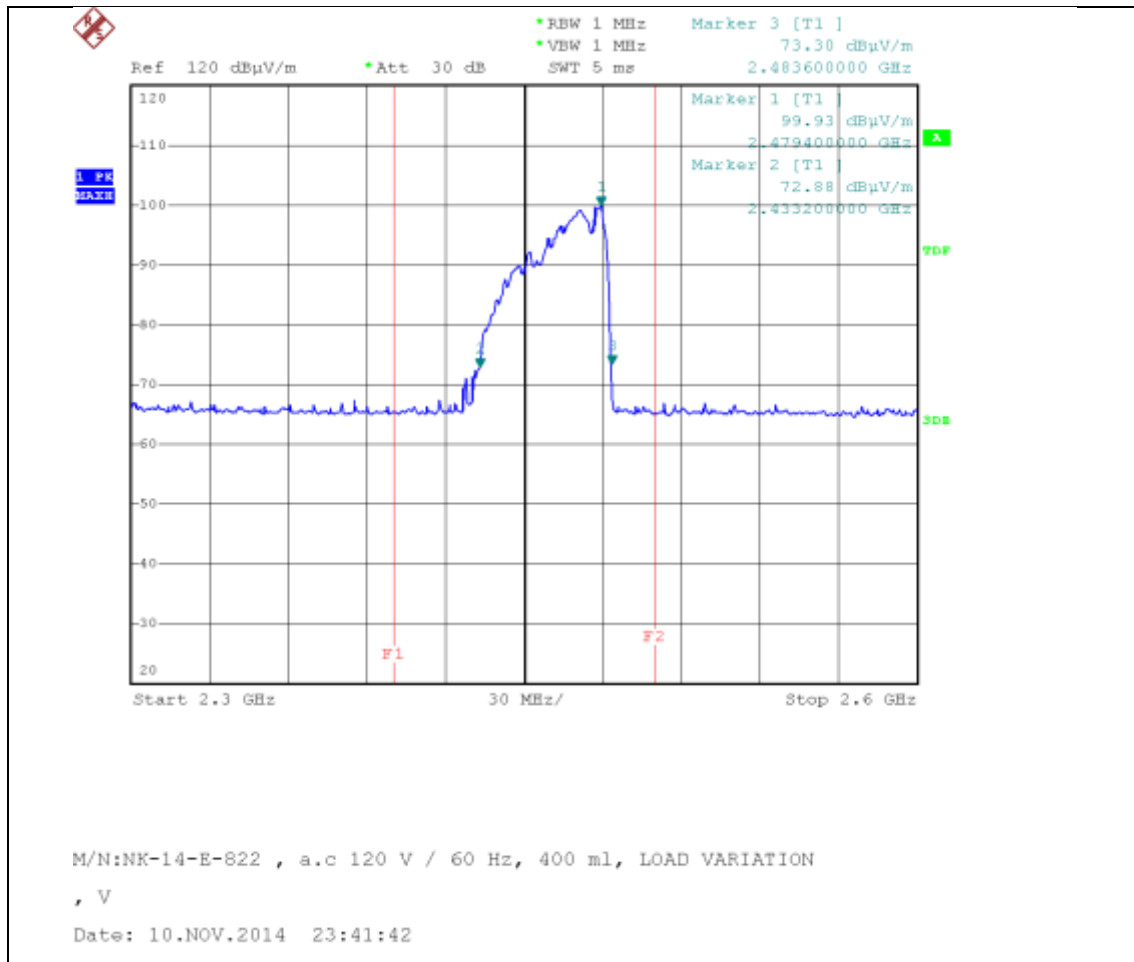

Vertical (120 V, 400 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

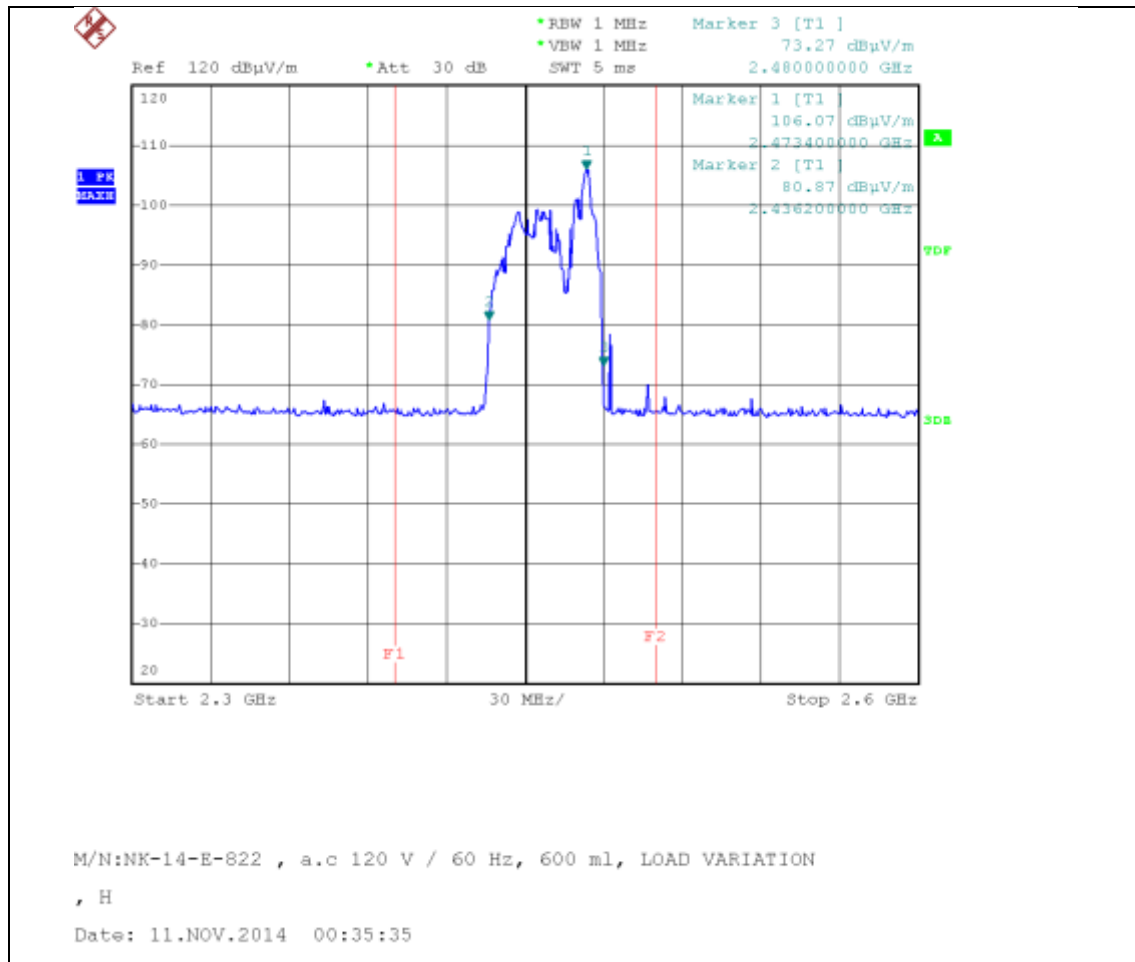

Horizontal (120 V, 600 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

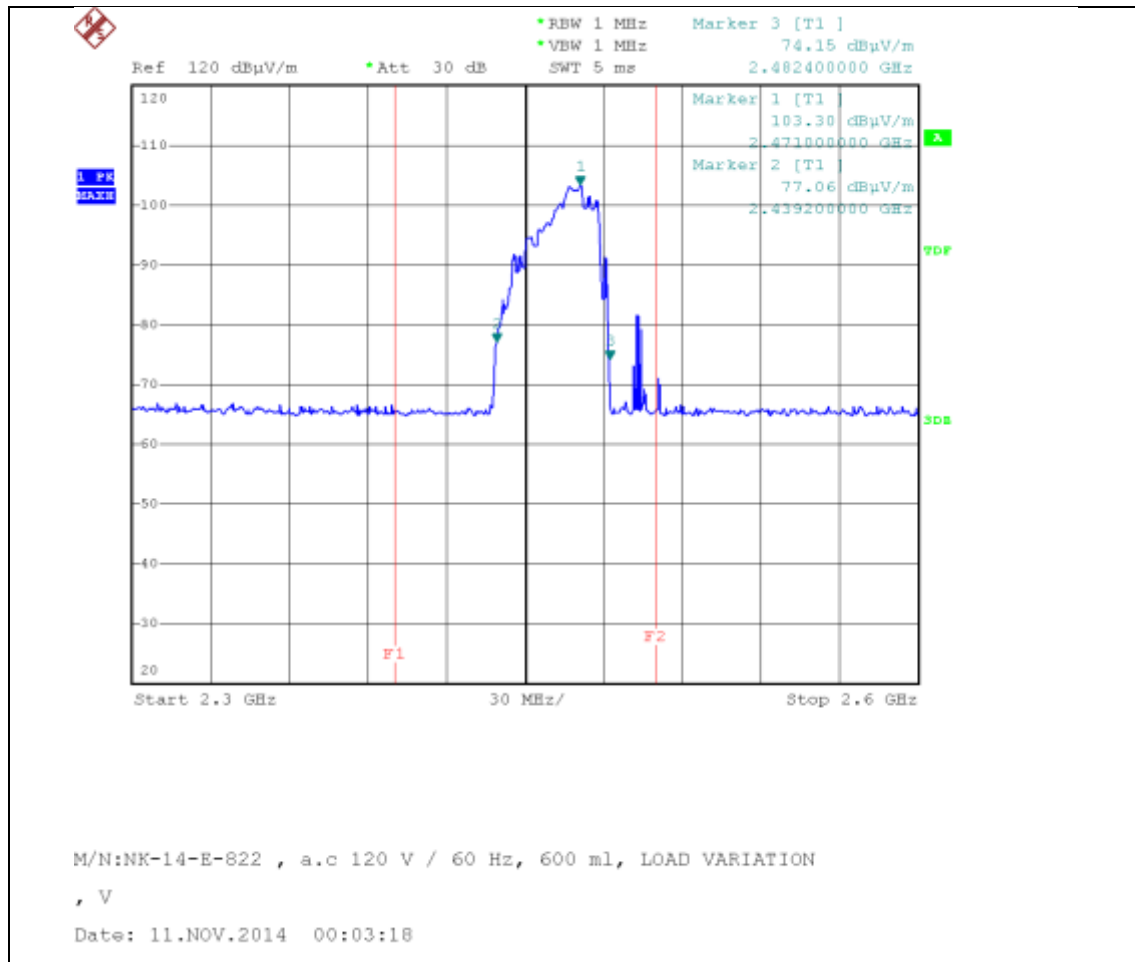

Vertical (120 V, 600 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

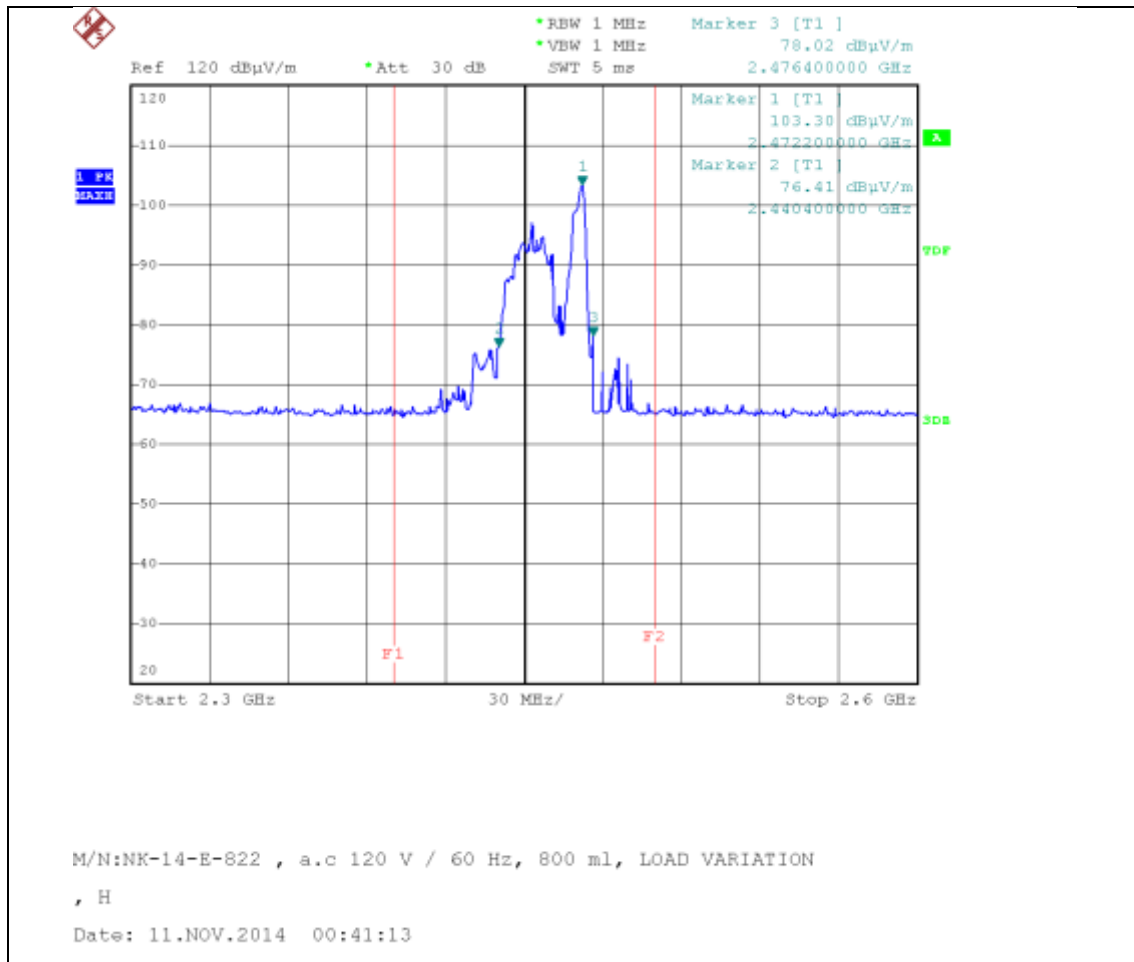

Horizontal (120 V, 800 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

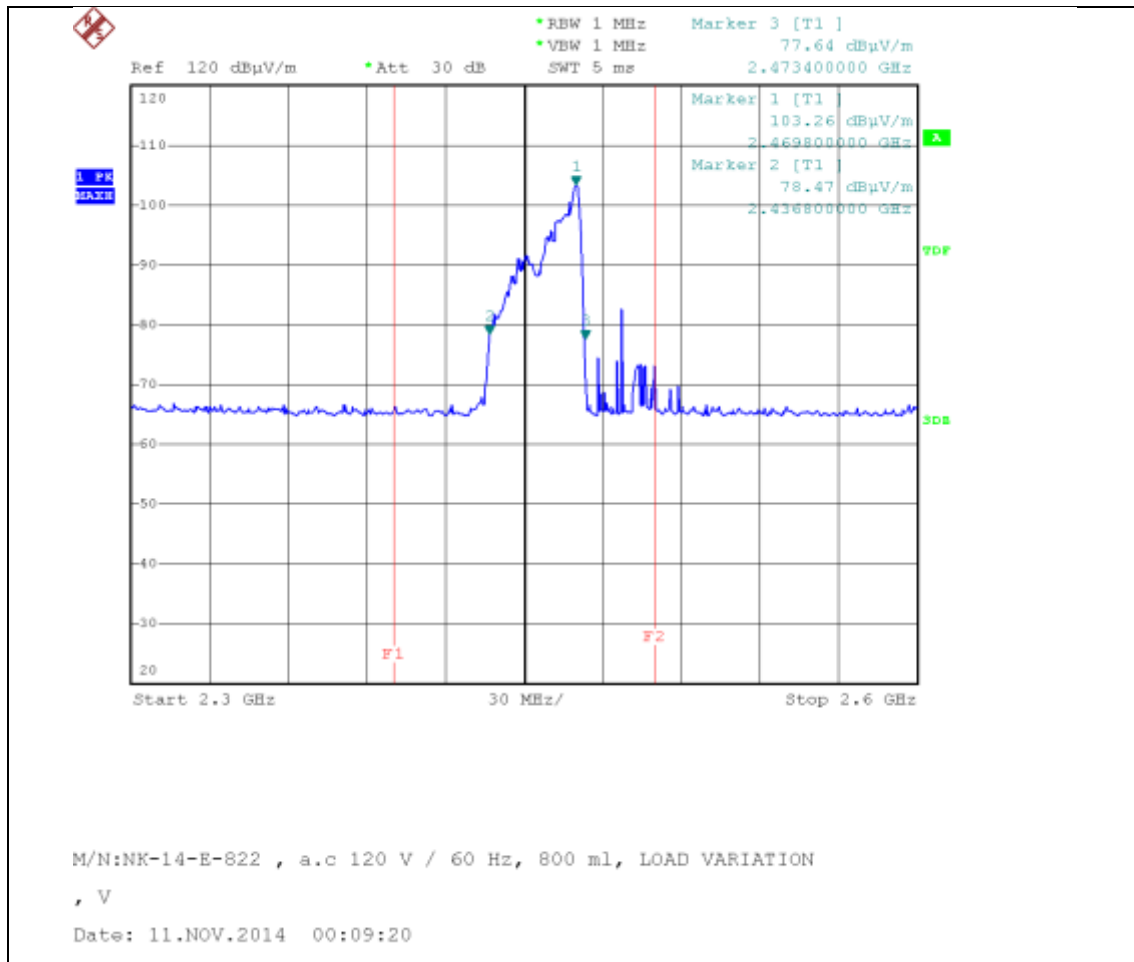

Vertical (120 V, 800 ml)

PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

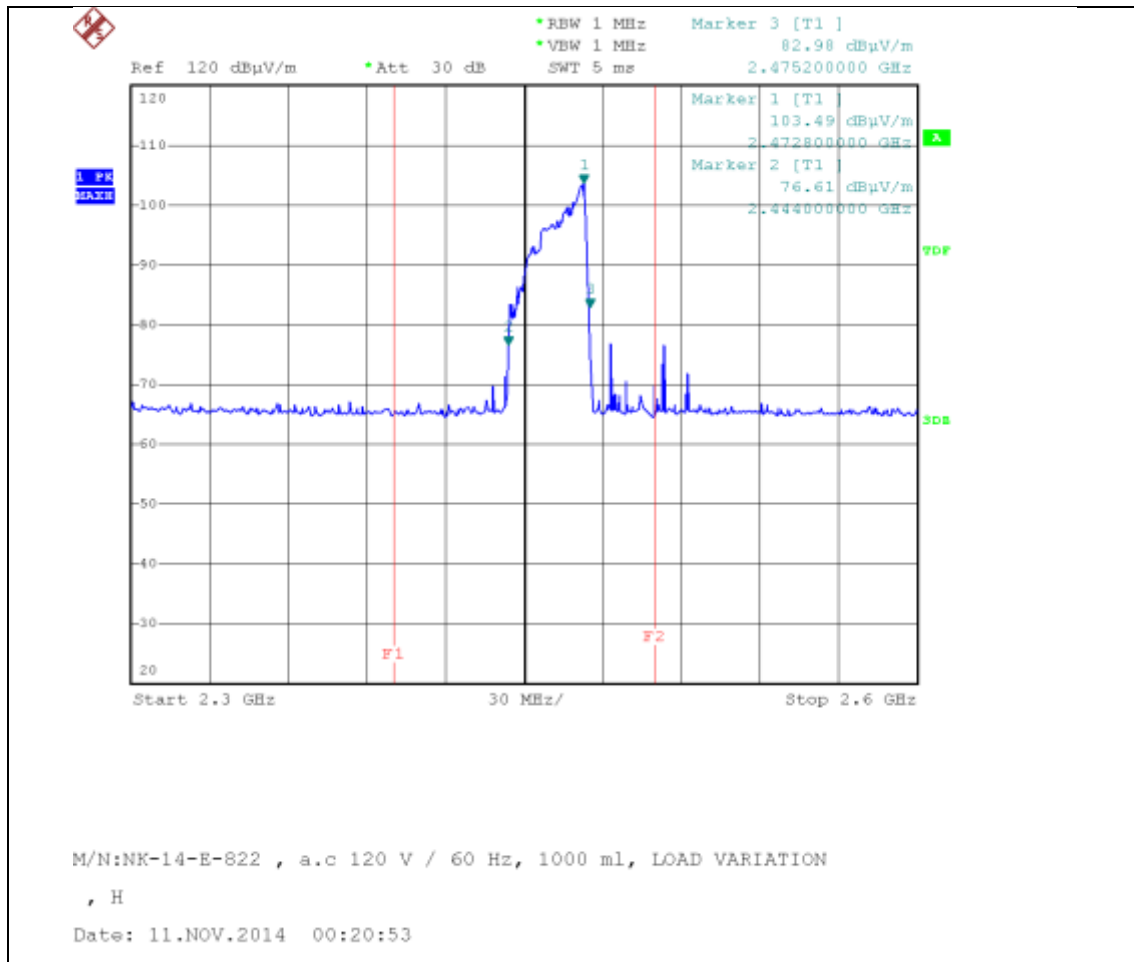

Horizontal (120 V, 1000 ml)

PLOTS OF EMISSIONS

- Frequency vs Load Variation Test

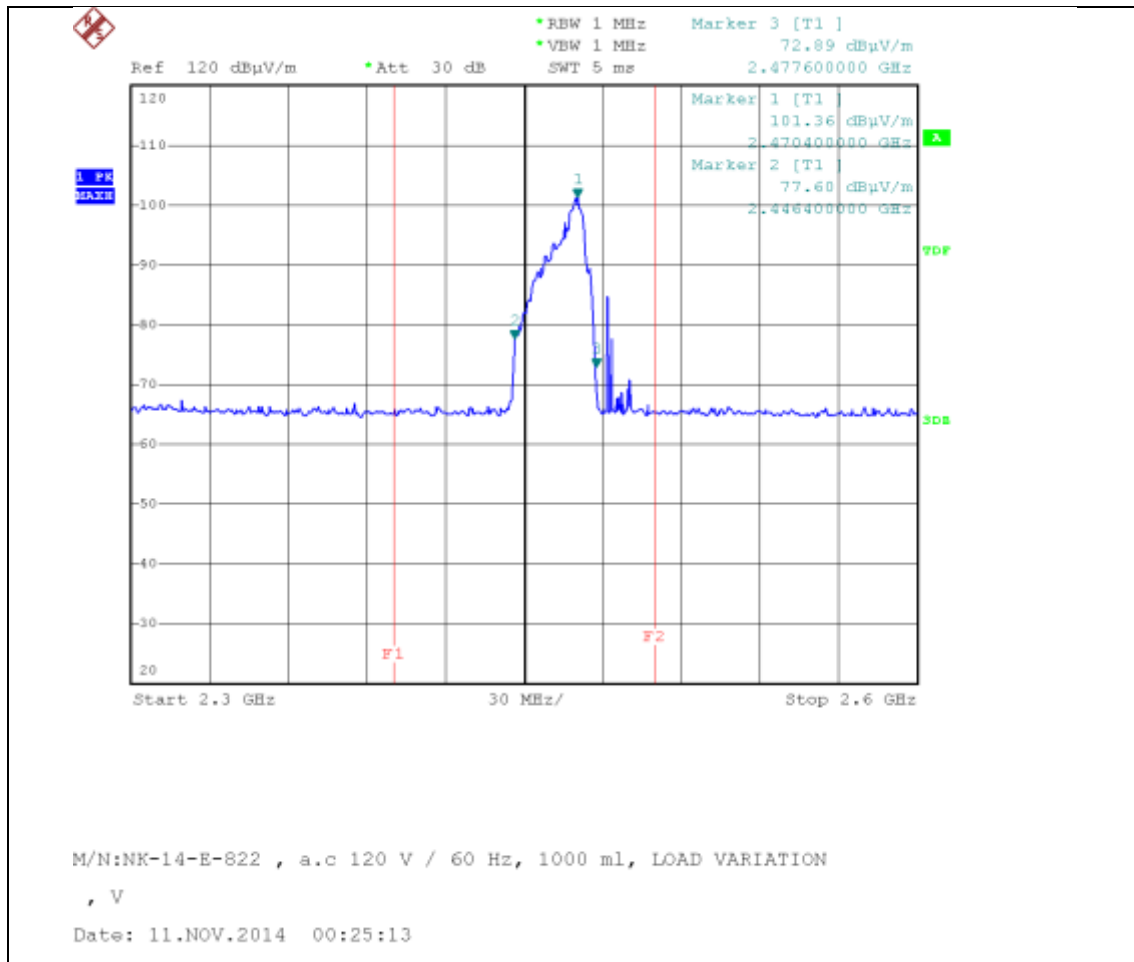

Vertical (120 V, 1000 ml)

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95 %

1. Conducted Uncertainty Calculation

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	R_s	0.07	normal 1	1.00	0.07	1	0.07
Receiver reading	R_i	± 0.02	normal 2	2.00	0.01	1	0.01
Attenuation AMN-Receiver	L_c	± 0.10	rectangular	$\sqrt{3}$	0.06	1	0.06
AMN Voltage division factor	L_{AMN}	± 0.09	normal 2	2.00	0.05	1	0.05
Sine wave voltage	dV_{SW}	± 0.17	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	dV_{PA}	± 0.92	normal 2	2.00	0.50	1	0.50
Pulse repetition rate response	dV_{PR}	± 0.35	normal 2	2.00	0.18	1	0.18
Noise floor proximity	dV_{NF}	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
AMN Impedance	dZ	± 2.00	normal 2	2.00	1.00	1	1.00
Mismatch	M	+ 0.80 - 0.89	U-Shaped	$\sqrt{3}$	0.60	1	0.60
Remark	Using 50 Ω / 50 μ H AMN						
Combined Standard Uncertainty	Normal			$u_c = 1.29$ dB			
Expanded Uncertainty U	Normal ($k = 2$)			$U = 2.6$ dB (CL is 95 %)			

2. Radiation Uncertainty Calculation (Below 1 GHz)

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	RS	0.11	normal 1	1.00	0.11	1	0.11
Receiver reading	Ri	± 0.02	normal 2	2.00	0.01	1	0.01
Sine wave voltage	dV_{sw}	± 0.17	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	dV_{pa}	± 0.92	normal 2	2.00	0.46	1	0.46
Pulse repetition rate response	dV_{pr}	± 0.35	normal 2	2.00	0.18	1	0.18
Noise floor proximity	dV_{nf}	± 0.50	normal 2	2.00	0.25	1	0.25
Antenna Factor Calibration	A_F	± 2.00	rectangular	$\sqrt{3}$	1.15	1	1.15
Cable Loss	C_L	± 1.00	normal 2	2.00	0.50	1	0.50
Antenna Directivity	A_D	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Antenna Factor Height Dependence	A_H	± 2.00	rectangular	$\sqrt{3}$	1.15	1	1.15
Antenna Phase Centre Variation	A_P	± 0.20	rectangular	$\sqrt{3}$	0.12	1	0.12
Antenna Factor Frequency Interpolation	A_I	± 0.25	rectangular	$\sqrt{3}$	0.14	1	0.14
Site Imperfections	S_i	± 4.00	triangular	$\sqrt{6}$	1.63	1	1.63
Measurement Distance Variation	D_V	± 0.60	rectangular	$\sqrt{3}$	0.35	1	0.35
Antenna Balance	D_{bal}	± 0.90	rectangular	$\sqrt{3}$	0.52	1	0.52
Cross Polarization	D_{Cross}	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Mismatch	M	+ 0.98 - 1.11	U-Shaped	$\sqrt{2}$	0.74	1	0.74
Combined Standard Uncertainty	Normal			$u_C = 2.62$ dB			
Expanded Uncertainty U	Normal ($k = 2$)			5.2 dB (CL is 95 %)			

3. Radiation Uncertainty Calculation (Above 1 GHz)

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Measurement System Repeatability	RS	0.08	normal 1	1.00	0.08	1	0.08
Receiver Reading	Ri	± 0.02	normal 2	2	0.01	1	0.01
Attenuation (antenna-receiver)	ac	± 0.40	normal 2	2	0.20	1	0.20
Preamplifier gain	Gp	± 0.11	normal 2	2	0.06	1	0.06
Receiver Sine Wave	dVsw	± 0.12	normal 2	2	0.06	1	0.06
Instability of preamp gain	dGp	± 1.2	rectangular	$\sqrt{3}$	0.70	1	0.70
Noise Floor Proximity	dVnf	± 0.70	rectangular	$\sqrt{3}$	0.40	1	0.40
Antenna Factor Calibration	AF	± 1.50	normal 2	2	0.75	1	0.75
Directivity difference	DFadir	± 1.00	rectangular	$\sqrt{3}$	0.58	1	0.58
Phase Centre location	AP	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Antenna Factor Frequency Interpolation	Ai	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Site Imperfections	Si	± 3.00	triangular	$\sqrt{6}$	1.22	1	1.22
Effect of setup table material	dANT	± 1.21	rectangular	$\sqrt{3}$	0.70	1	0.70
Separation distance	dD	± 0.50	rectangular	$\sqrt{3}$	0.29	1	0.29
Cross Polarization	DCross	± 0.00	rectangular	$\sqrt{3}$	0.00	1	0.00
Table height	dh	± 0.00	normal 2	2	0.00	1	0.00
Mismatch (antenna-Preamplifier)	M	+ 1.30 - 1.50	U-Shaped	$\sqrt{2}$	1.00	1	1.00
Mismatch (preamplifier-antenna)	M	+ 1.20 - 1.40	U-Shaped	$\sqrt{2}$	0.92	1	0.92
Combined Standard Uncertainty	Normal			$u_c = 2.36$ dB			
Expanded Uncertainty U	Normal ($k = 2$)			$U = 4.7$ dB (CL is 95 %)			

LIST OF TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Due to Calibration	Calibration Interval
1	Microwave survey meter	ETS Lindgren	1501	00033549	Mar.05 2015	1 year
2	SPECTRUM ANALYZER	R&S	FSL3	101732	Apr. 03 2015	1 year
3	LOOP ANTENNA	R&S	HFH2-Z2	N/A	Feb. 13 2016	2 years
4	EMI Test Receiver	R&S	ESCI	101041	Apr. 02 2015	1 year
5	Software	R&S	EMC32	Version 8.53.0	-	-
6	Artificial Mains Network	R&S	ESH2-Z5	100273	Apr. 03 2015	1 year
7	ATTENUATOR	FAIRVIEW	SA3N5W-10	N/A	Apr. 03 2015	1 year
8	EMI Test Receiver	R&S	ESU 40	100202	Apr. 03 2015	1 year
9	Software	R&S	EMC32	Version 8.53.0	-	-
10	TRILOG Broadband Test Antenna	SCHWARZBECK	VULB 9163	9163-423	June 21 2015	2 year
11	ATTENUATOR	FAIRVIEW	SA3N5W-06	N/A	Apr. 04 2015	1 year
12	AMPLIFIER	Sonoma Instrument	310N	291916	Jul. 16 2015	1 year
13	Controller	innco systems GmbH	CO2000-G	CO2000/562/23890210/L	N/A	N/A
14	Open Switch and Control Unit	R&S	OSP-120	100015	N/A	N/A
15	Antenna Mast (Left)	innco systems GmbH	MA4000-EP	N/A	N/A	N/A
16	Turn Table	innco systems GmbH	DT3000-3T	N/A	N/A	N/A
17	Signal Conditioning Unit	R&S	SCU 01	10030	Apr. 03 2015	1 year
18	SPECTRUM ANALYZER	Rohde & Schwarz	FSP40	100361	Jul. 16 2015	1 year
19	Signal Conditioning Unit	Rohde & Schwarz	SCU 18	10065	Apr. 03 2015	1 year
20	Double Ridged Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-474	Sep. 01 2016	2 year
21	Open Switch And Control Unit	R&S	OSP-120	100081	N/A	N/A
22	Turn Table	innco systems GmbH	DS 1200 S	N/A	N/A	N/A
23	Antenna Mast	R&S	MA 4000	N/A	N/A	N/A

APPENDIX D – SCHEMATIC DIAGRAM

APPENDIX E – USER’S MANUAL

APPENDIX F – BLOCK DIAGRAM
