



EMISSION TEST REPORT

Test report file No. : **03-IST-210/FA** Date of issue : Jul. 09, 2003

Model / Type No. : DSP-4280GM Basic Alternate

Kind of product : PDP(Plasma Display Panel)

Brand name : DAEWOO

Applicant : Daewoo Electronics Corp.

Manufacturer : Daewoo Electronics Corp.

License holder : Daewoo Electronics Corp.

Address : 543, Dangjung-Dong, Kunpo-City, Gyunggi-Do, Korea

Test result according to the regulation(s)

Positive Negative

at page 3.

This test report with appendix consists of 16 pages. The test result only responds to the tested sample.

It is not allowed to copy this report even partly without the allowance of the Test Laboratory.

This equipment is complied with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

DIRECTORY

A) Documentation.	Page
Directory	<u>2</u>
Test regulations	<u>3</u>
Information of Test Regulation	<u>3</u>
Equipment under Test	<u>4</u>
Description of Difference	<u>5</u>
Test Conditions	<u>6 ~ 7</u>
Test Result	<u>8</u>
Measurement Uncertainty	<u>9</u>
Test-setup	<u>10 ~ 12</u>
Summary	<u>18</u>
B) Test Data.	
Conducted emissions (Mains) : 150 kHz - 30 MHz	<u>13 ~ 15</u>
Radiated emissions : 30 MHz – 1 GHz	<u>16 ~ 17</u>

C) Appendix

TEST REGULATIONS

The tests were performed according to the following regulations ;

- - FCC Part 15, Subpart B (Unintentional Radiators, Class B)

Information of Test Laboratory

IST EMC Lab.

San 21-8 Goan-Ri, Baekam-Myun, Yongin-Si, Kyunggi-Do, Korea
International - Tel : 82-31 - 333 - 4093. Fax : 82-31 - 333 - 4094.
Domestic - Tel : 031 - 333 - 4093. Fax : 031 - 333 - 4094.

EQUIPMENT UNDER TEST

Equipment Description :

Outer dimensions :	Without Stand : WxHxD=1,055 x 652 x 85 mm With Stand : WxHxD=1,055 x 730 x 85 mm
Diagonal Size :	106cm(42")
Power requirements :	100 ~ 240 Vac, 50/60Hz, 3.2 ~ 1.3A
Rated input power :	320W
External port :	PC IN(1), Component IN(2), Video IN(2), Speaker Out(2), S-Video IN(2)
Product :	PDP(Plasma Display Panel)

EUT Type :

- Table-Top.
 Floor-Standing.
 Table-Top and Floor-Standing(Combination).

Operation – mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- Standby.
 Operational Condition : Scrolling “H” characters under MS Windows,
at test mode of 1600 X 1200, 75 Hz

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No
PC	Vectra VL420 MT	HP	SG21208253
Keyboard	SK-2502C	HP	M020321534
Mouse(PS/2)	M-S48a	HP	LZC20660272
Mouse(Serial)	M-M28	Logitech	LCA53305547
Printer	A0302384	Northern Telecom	26633S60168

Connecting Interface Cables & Ports :

- Shielded monitor’s signal cable : 2.8m
- S-Video Cable: 1.0m(75Ω, 620Ω Termination)
- RCA Cables: 75Ω(Video IN), 47kΩ(Audio IN) Termination
- Unshielded Speaker cable : 2.5m

Description of Difference

(Difference Between Original and Changed DSP-4280GM)

Difference between the original model and the changed model

Item	The original model		The changed model		Remark
	Manufacturer	Type	Manufacturer	Type	
Noise filter	DELTA Electronics Inc.	10DKDW3S	DELTA Electronics Inc.	10GEEW3Q	
CONN SUB PCB	None	None	DAEWOO Electronics Corp.	PTSUMSG023	adding
POWER PCB	SM TECH	SP-3000	ORIGIN Electric Co.,Ltd.	PDD-421	
VIDEO PCB	DAEWOO Electronics Corp.	PEVDMSD035	DAEWOO Electronics Corp.	PTVDMMSG023	Changed to LVDS Interface
FILTER GLASS	Ashahi Glass		Nisshinbo Industries Inc.	1142G03E	
PDP Module	ORION PDP Co.,Ltd.	PW4210	LG Electronics Inc.	PDP42V50011	

* PDP Module mainly consists of PDP Panel, X-SUS PCB, Y-SUS PCB, CONNECTION PCB and so on.

TEST CONDITIONS

The measurement of the conducted emissions (Interference voltage) was performed in a shielded room.

Test location :

Shielded room. No.1 Compact chamber 2

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 25, 2002	892108/018
3725/2	LISN	EMCO	Aug. 22, 2002	9101-2068
KNW-407	LISN	Hyup-Rip	Aug. 21, 2002	8-833-10
ESH 3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 25, 2002	357.8810.52

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement Procedures :

Conducted emissions measurements were made in accordance with ANSI C-63.4-1992, "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω/50uH LISN as the input transducer to an EMI/Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an IF bandwidth of 10kHz or for "quasi-peak" within a bandwidth of 9kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



S. J. Oh / Research Engineer
IST EMC Lab.

The **measurement of the radiated emissions (Electric field)** in the frequency range from 30 MHz to 1GHz was performed in horizontal and vertical antenna polarization at a open-site which meet the site attenuation requirement of ANSI C63.4-1992 and a test distance of :

Location : Open Site No. 1 Open Site No. 2 Open Site No. 3
 Distance : 3 meters 10 meters

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVP	Test Receiver	Rohde & Schwarz	Aug. 16, 2002	861744/004
VULB 9160	Antenna	Schwarzbeck	Jul. 10, 2002	3048

Test - accessories :


Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement procedures

Radiated measurements were in accordance with ANSI C63.4-1992 “Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a EMI/Field Intensity Meter. The measurements were made with the detector set for “quasi-peak” within a bandwidth of 120kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



 S. J. Oh / Research Engineer
 IST EMC Lab.

TEST RESULT

Conducted emissions : 150 kHz - 30 MHz

The requirements are.

KEPT NOT KEPT

Min. limit margin

_____ 6.8 _____ dB at _____ 0.157 _____ MHz

Remarks : See test-data at pages 13 ~ 15.

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are.

KEPT NOT KEPT

Min. limit margin

_____ 6.0 _____ dB at _____ 39.5 _____ MHz

Remarks : See test-data at page 16 ~ 17.

Measurement Uncertainty Calculation

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Conducted Emissions)	Probability Distribution	Uncertainty (\pm dB)
		0.15-30MHz
Receiver Specification	Rectangular	1.5
LISN Coupling Specification	Rectangular	1.5
Cable and Input Attenuator Calibration	Normal (k=2)	0.5
Mismatch to Receiver	U-Shaped	-0.8 / +0.7
System Repeatability	Normal (k=1)	0.2
Combined Standard Uncertainty	Normal (k=2)	-1.85 / +1.71
Expanded Uncertainty U	Normal (k=2)	-3.7 / +3.42

$$U_{c,min us} = -1.85, U_{c,plus} = 1.71$$

$$U = -3.70 / +3.42 (k=2, 95.45\% \text{ confidence level})$$


Contribution (Radiated Emissions)	Probability Distribution	Uncertainties(\pm dB)
		3 m
Antenna		
Factor	Normal (k=2)	0.9968
Frequency Interpolation	Rectangular	0.1039
Height Variation	Rectangular	-2.6 / +1.5
Directivity Difference	Rectangular	-1.0 / +0
Phase Center Location	Rectangular	1.0
Cable Loss	Normal (k=2)	0.5
Receiver		
Voltage Accuracy	Normal (k=2)	2.0
Pulse Response	Rectangular	1.5
Absolute Repetition Rate	Rectangular	1.5
Mismatch to Receiver		
$ \Gamma_{antenna} = 0.33$	U-Shaped	-1.0 / +0.9
$ \Gamma_{receiver} = 0.33$		
System Repeatability	Std Deviation	0.5
Combined Standard Uncertainty	Normal	-2.6048 / 2.2775
Expanded Uncertainty U	Normal (k=2)	-5.21 / +4.55

$$U_{c,min us} = -2.6048, U_{c,plus} = 2.2775$$


$$U = -5.21 / +4.55 (k=2, 95.45\% \text{ confidence level})$$

TEST SETUP (Drawings)

Type : DSP-4280GM

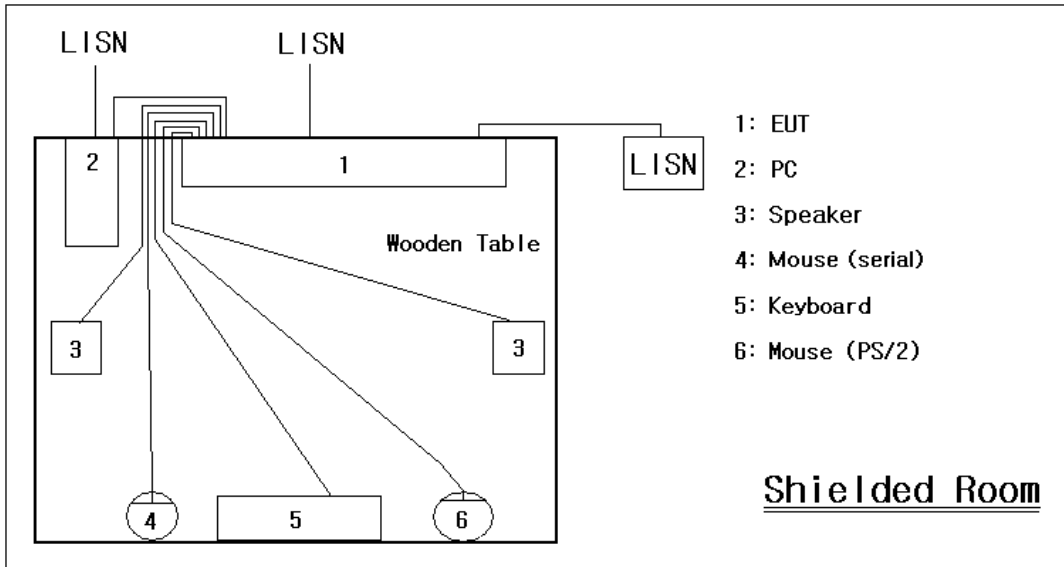

Conducted Emissions 150kHz - 30 MHz

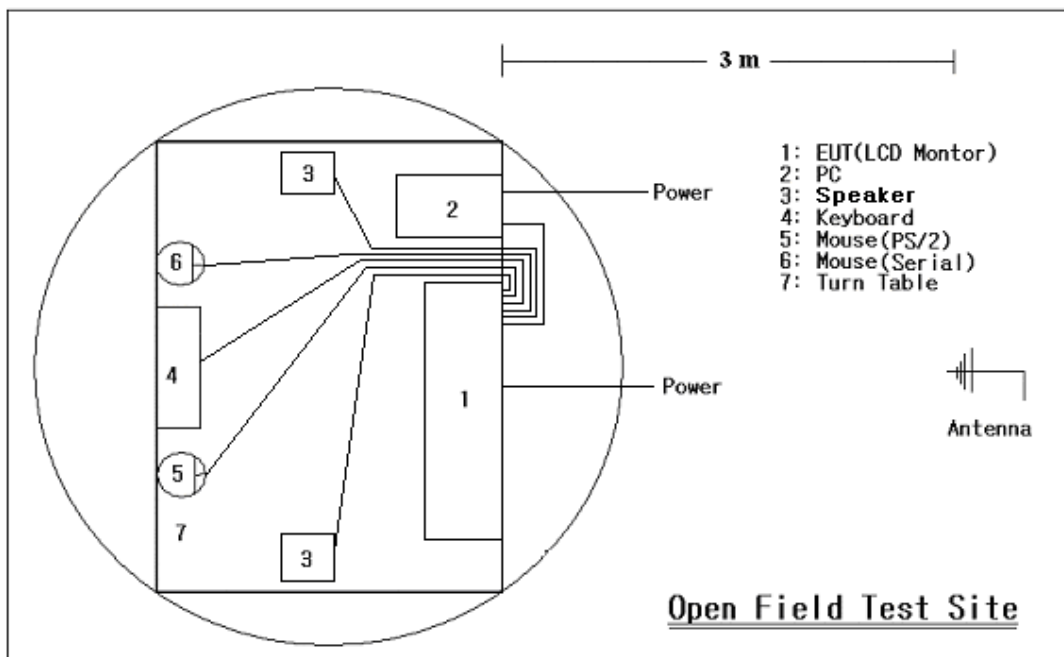

Radiated Emissions 30 MHz - 1000 MHz

TEST SETUP (Photos)

Type : DSP-4280GM



Conducted Emissions 150kHz - 30 MHz



TEST SETUP (Photos)

Type : DSP-4280GM



Radiated Emissions 30MHz - 1000 MHz



Conducted Emission Test Data

Type DSP-4280GM
 Manufacturer Daewoo Electronics Corp.
 Operation mode Scrolling "H" pattern display at 1600 x 1200, 75Hz
 Environmental Conditon Temperature : 21 °C
 Humidity : 40 %
 Atmospheric pressure : 1001 mbar
 Date Jun. 23, 2003

Highest Emissions ralative to the limit


Frequency [MHz]	Reading [dB μ V]		Phase	Insertion Loss (LISN)	Limit [dB μ V]		Margin [dB]	
	Q-peak	AV			Q-peak	AV	Q-peak	AV
0.157	55.1	48.0	L1	0.8	65.6	55.6	9.7	6.8
0.195	50.0	37.4		0.8	63.8	53.8	13.0	15.6
1.399	36.0	13.6		0.8	56.0	46.0	19.2	31.6
3.999	38.4	21.2		0.8	56.0	46.0	16.8	24.0
13.877	33.5	16.2		0.8	60.0	50.0	25.7	33.0
17.155	30.9	13.4		0.8	60.0	50.0	28.3	35.8
0.157	52.5	45.7		N	0.8	65.6	55.6	12.3
0.192	50.8	36.2	0.8		63.9	53.9	12.3	16.9
1.399	36.6	13.7	0.8		56.0	46.0	18.6	31.5
3.999	35.3	17.0	0.8		56.0	46.0	19.9	28.2
13.873	34.1	15.2	0.8		60.0	50.0	25.1	34.0
26.231	24.3	15.1	0.8		60.0	50.0	34.9	34.1
Cable loss are less than 0.1 dB								


*L1 : Live Line

**N : Neutral Line

*** Please refer to data graphs at page 14 ~ 15.

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -3.70 / +3.42 [dB]

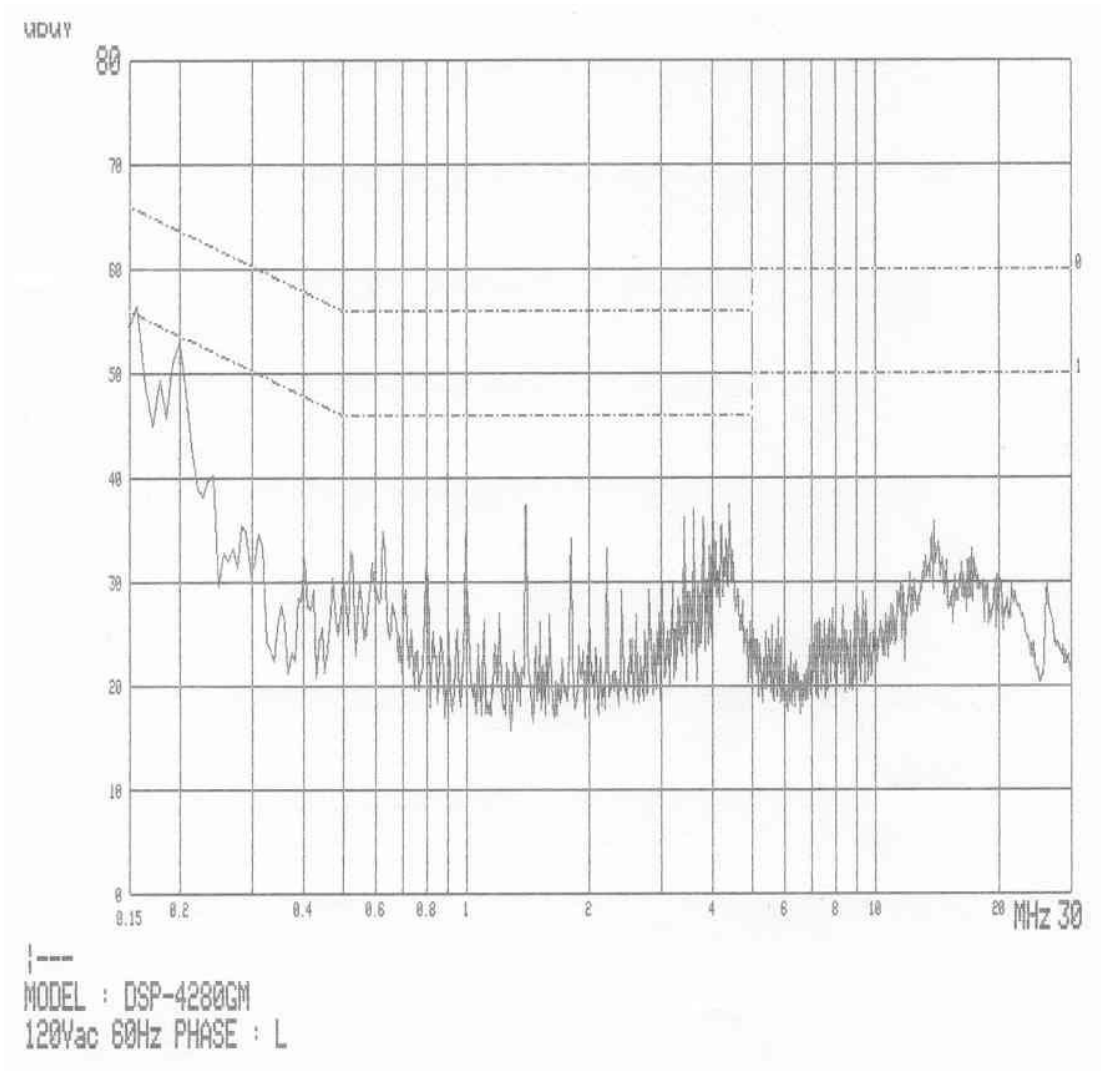

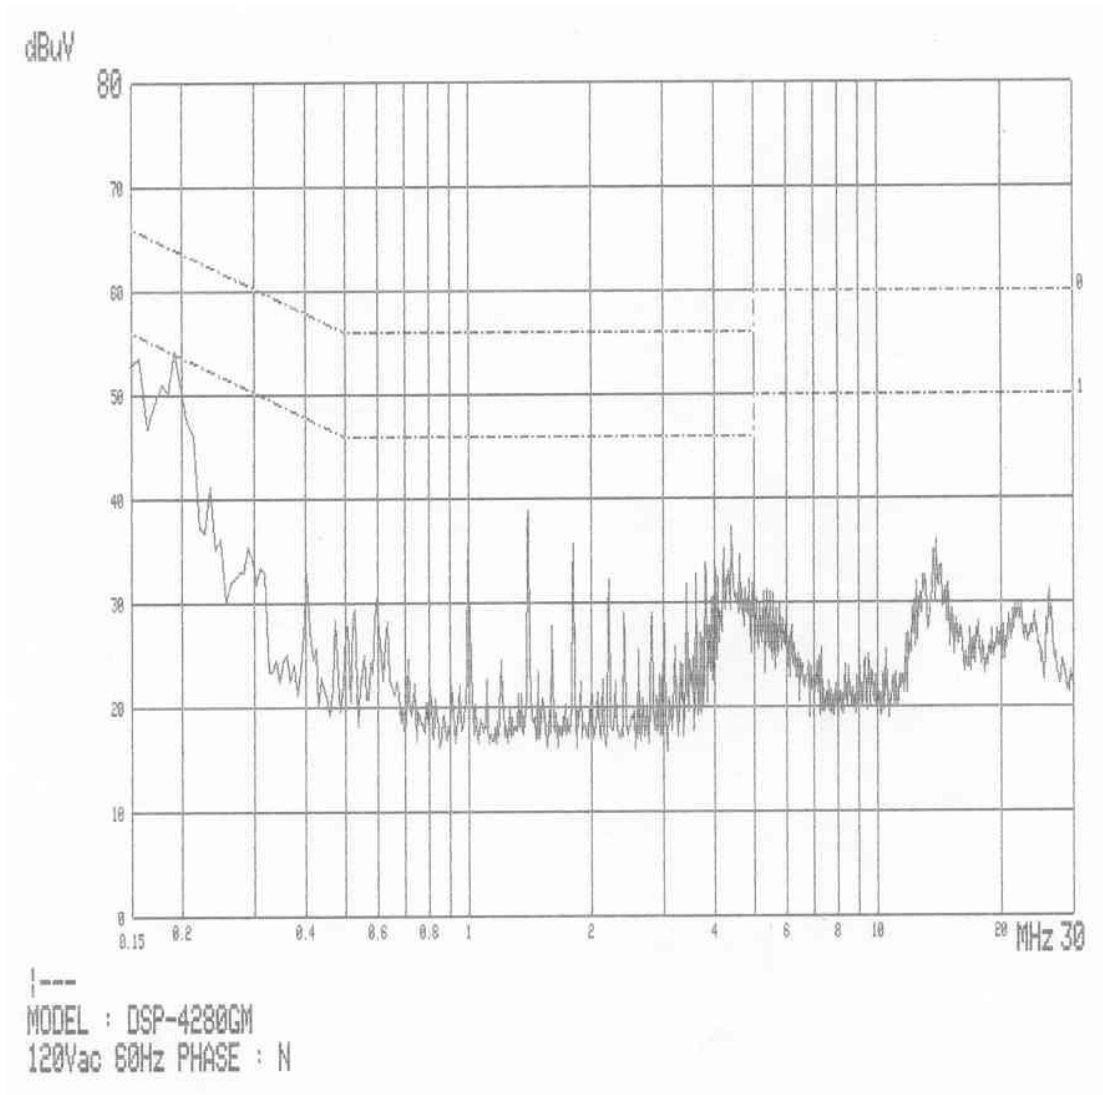


Radiation Test Data

Type DSP-4280GM
 Manufacturer Daewoo Electronics Corp.
 Operation mode Scrolling "H" pattern display at 1600 x 1200, 75Hz
 Environmental Condition Temperature : 20°C
 Humidity : 38 %
 Atmospheric pressure : 1002 mbar
 Test distance 10 m
 Antenna VULB9160
 Date Jun. 20, 2003

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
39.5	19.2	13.6	1.2	237	100	V	34.0	40.0	6.0
50.6	17.0	10.6	1.3	215	100	V	28.9	40.0	11.1
67.2	16.0	10.3	1.5	256	100	V	27.8	40.0	12.2
74.7	19.0	8.8	1.6	255	100	V	29.4	40.0	10.6
115.9	17.0	9.6	2.0	323	100	V	28.6	43.5	14.9
142.9	10.5	11.7	2.2	337	100	V	24.4	43.5	19.1
163.3	11.7	12.3	2.3	186	100	V	26.3	43.5	17.2
180.8	9.0	10.5	2.4	189	100	V	21.9	43.5	21.6
199.3	13.2	8.6	2.5	229	100	V	24.3	43.5	19.2
265.3	23.4	11.5	3.0	282	364	H	37.9	46.0	8.1
322.2	16.5	11.7	3.4	210	352	H	31.6	46.0	14.4
346.9	10.0	11.7	3.6	220	322	H	25.3	46.0	20.7
400.0	5.0	13.3	4.3	275	206	H	22.6	46.0	23.4

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -5.21 / +4.55 [dB]

MEASUREMENT OF DISTURBANCE RADIATION

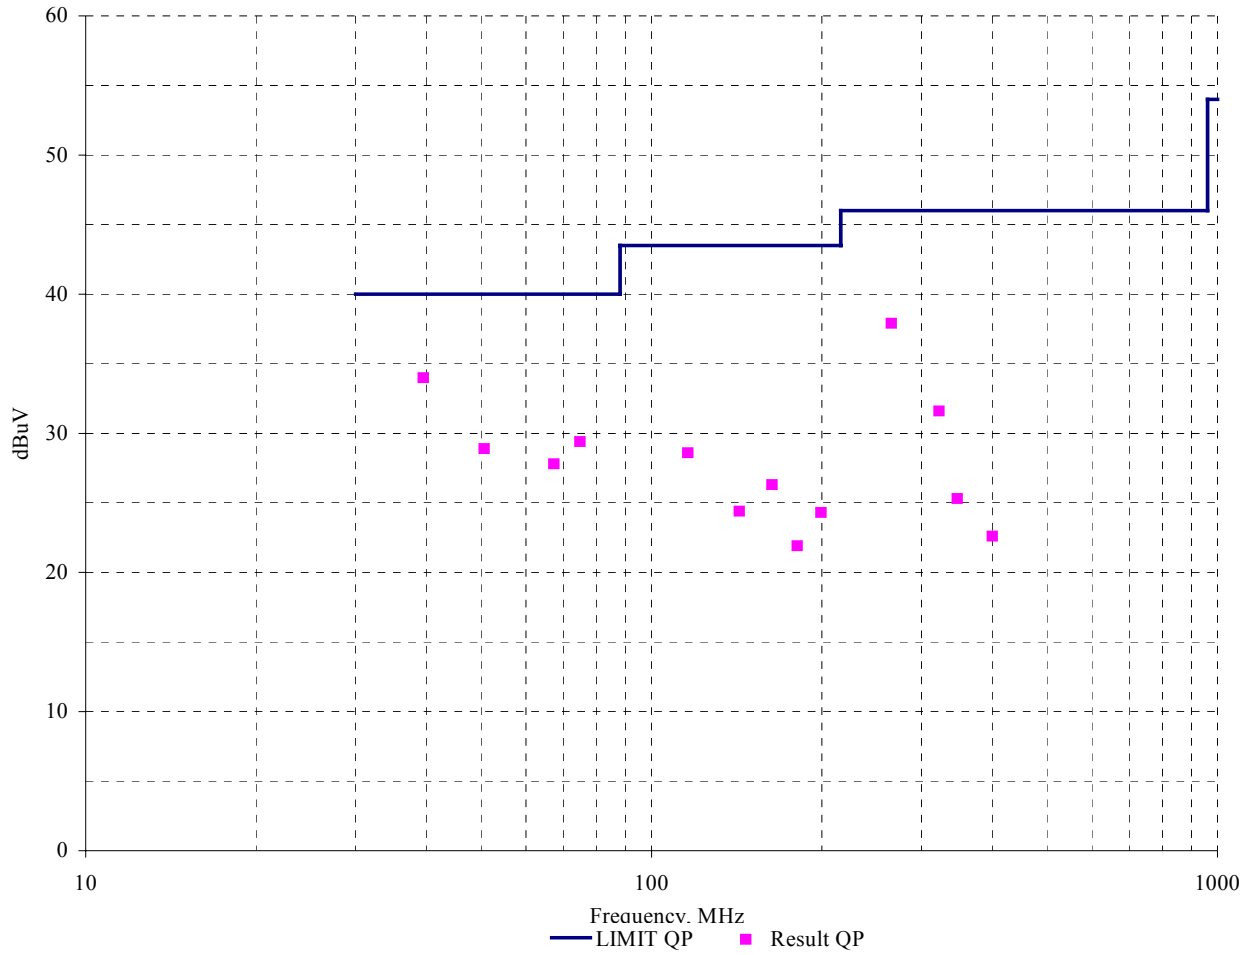

SUMMARY

GENERAL REMARKS :

The equipment is not modified anything, mechanical or circuit to improve EMI status during a measurement and complied the regulation "Part 15 subpart B Class B of CFR 47"

FINAL JUDGMENT :

The requirements according to the technical regulations are

- Kept Not kept


The equipment under test does

- Fulfill the general approval requirements mentioned on page 3.
 Not fulfill the general approval requirements mentioned on page 3.

Begin of testing : Jun. 16, 2003


End of testing : Jun. 30, 2003

Reviewed by :



Joon H. Lee. EMC Manager
IST EMC Lab.

Approved by :



G. Chung Chief of EMC Lab.