


BST-25

INTERNAL ADJUSTMENTS

(216 - 217 MHz)

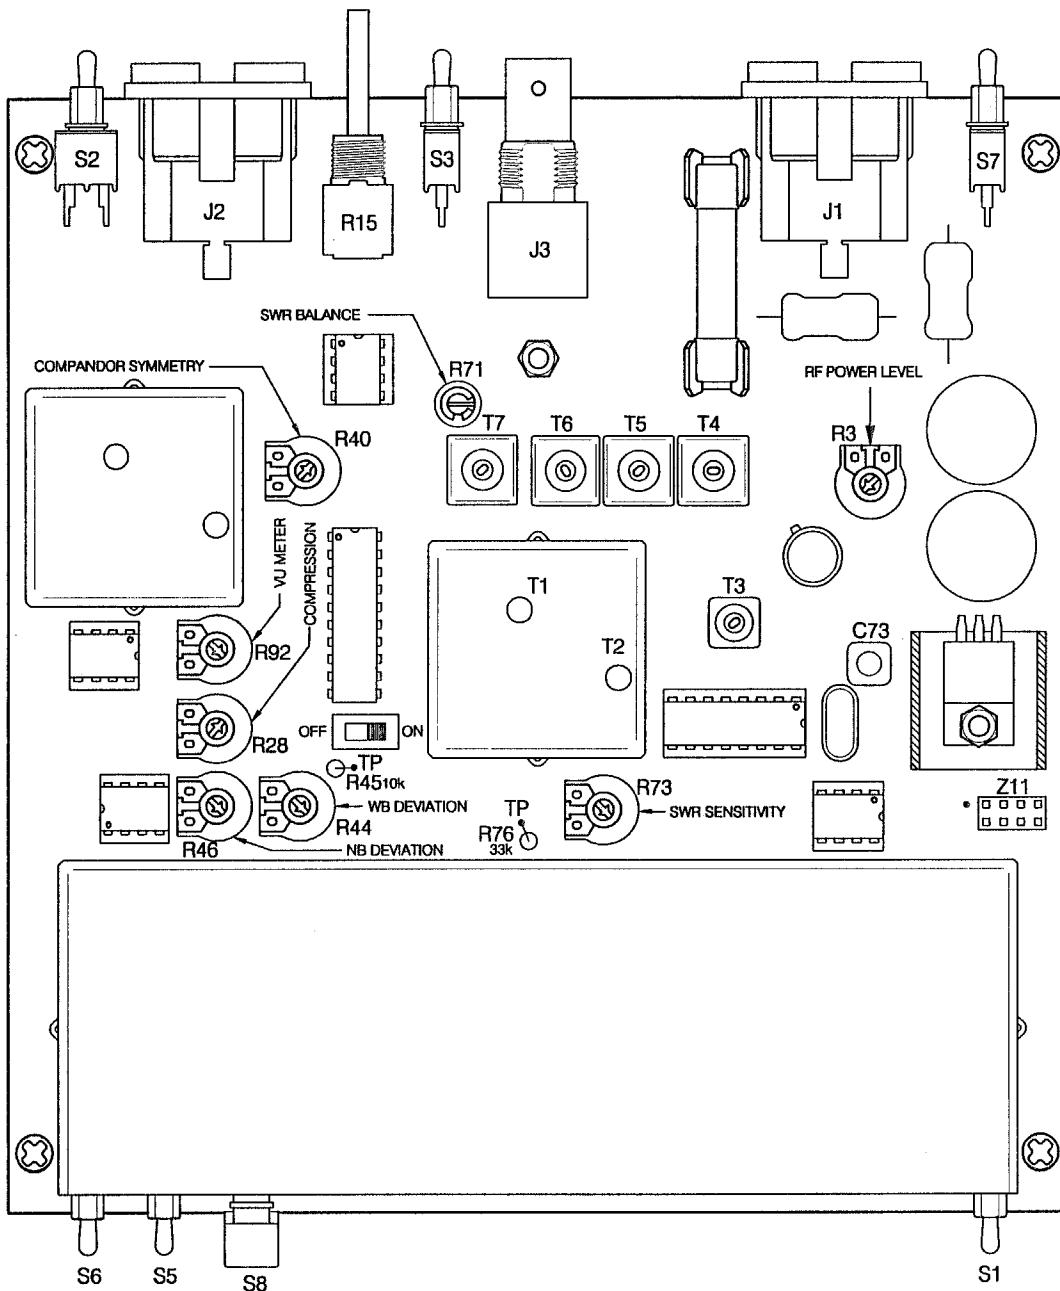

- Frequency Span Test
 - First turn "on" Transmitter
 - Insert Jumper

NOTE: The COMPAND switch must be set to the ON position for automatic selection functions.

COMTEK 307 West 2700 South • Salt Lake City, Utah 84116 • (800) 468-3463 • Fax: (801) 484-6906			
TITLE: BST-25 INTERNAL ADJUSTMENTS (216 - 217 MHz)			
DRAWN: R.D.S. DATED: 05/08/00	CHECKED: DATED: DUALITY CONTROL: DATED: RELEASED: DATED:	CODE: SIZE: DRAWING NO: BST25TP2 REV:	
		FILE: BST25TP2.DWG	SHEET: 2 OF 2