



## **Cybiotronics Limited**

Application  
For  
Certification

**FCC ID: CAC3000**

Receiver

Sample Description : USB Converter

Model: A30-XX

Additional Models: CY-RC3033-XX

Report No.: 140510002SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, mention 47 CFR [10-1-13]

Prepared and Checked by:

Approved by:

Sign on file

Harry Wu  
Engineer

---

Andy Yan  
Senior Project Engineer  
Date: December 29, 2014

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_RX\_b

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**  
6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

---

## INTERTEK TESTING SERVICES

---

### LIST OF EXHIBITS

#### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Test Equipment List



## MEASUREMENT/TECHNICAL REPORT

**Cybiotronics Limited**  
**Model: A30-XX**  
**FCC ID: CAC3000**

This report concerns (check one:) Original Grant   X   Class II Change       

Equipment Type: CYY – Communications Receiver used w/Pt 15 Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes        No   X  

If yes, defer until:                       
date

Company Name agrees to notify the Commission by:                                       
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes        No   X  

If no, assumed Part 15, Subpart B for unintentional radiator - the new 47 CFR [10-1-13 Edition] provision.

Report prepared by:

Harry Wu  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6/F, Block D, HuaHan Building, Longshan  
Road, Nanshan District, Shenzhen, China.  
Phone: (86 755) 8601 0716  
Fax: (86 755) 8601 6751



## Table of Contents

1.0	<b><u>General Description</u></b>	2
1.1	Product Description	2
1.2	Related Submittal(s) Grants	2
1.3	Test Methodology	2
1.4	Test Facility	2
2.0	<b><u>System Test Configuration</u></b>	4
2.1	Justification	4
2.2	EUT Exercising Software	4
2.3	Special Accessories	4
2.4	Equipment Modification	5
2.5	Measurement Uncertainty	5
2.6	Support Equipment List and Description	5
3.0	<b><u>Emission Results</u></b>	7
3.1	Field Strength Calculation	8
3.2	Radiated Emission Configuration Photograph	9
3.3	Radiated Emission Data	10
3.4	Conducted Emission at Mains Terminal	12
3.4.1	Conducted Emissions Configuration Photograph	12
3.4.2	Conducted Emissions	12
4.0	<b><u>Equipment Photographs</u></b>	16
5.0	<b><u>Product Labelling</u></b>	18
6.0	<b><u>Technical Specifications</u></b>	20
7.0	<b><u>Instruction Manual</u></b>	22
8.0	<b><u>Miscellaneous Information</u></b>	24
8.1	Emissions Test Procedures	24
9.0	<b><u>Confidentiality Request</u></b>	27
10.0	<b><u>Test Equipment List</u></b>	29



### List of attached file

Exhibit type	File Description	filename
Test Report	Test Report	report.pdf
Operation Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf



**EXHIBIT 1**

**GENERAL DESCRIPTION**

## 1.0 **General Description**

### 1.1 Product Description

The equipment under test (EUT) is a receiver for USB Converter operating at 914.780 MHz. The EUT is powered by USB port. For more detailed features description, please refer to the user's manual.

The Model: CY-RC3033-XX is the same as the Model: A30-XX in hardware aspect. The difference in appearance and model number serves as marketing strategy.

Antenna Type: Integral antenna

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a receiver. The transmitter, associated with this receiver, has FCC ID: CAC3033 and has been filed at the same time.

### 1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Radiated Emission measurement was performed in a Semi-anechoic chamber. Preliminary scans were performed in the Semi-anechoic chamber only to determine worst case modes. For each scan, the procedure for maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 1.4 Test Facility

The Semi-anechoic chamber facility used to collect the radiated data is Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).



## **EXHIBIT 2**

### **SYSTEM TEST CONFIGURATION**



## 2.0 **System Test Configuration**

### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The EUT was powered by USB port of TV and TV with 120V/60Hz input during testing.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency range from 30MHz to 5GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it received continuously.

### 2.3 Special Accessories

No special accessories used.



## 2.4 Equipment Modification

Any modifications installed previous to testing by Cybiotronics Limited will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Kejiyuan Branch.

## 2.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

## 2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Television	SONY	KDL-24EX520



**EXHIBIT 3**  
**EMISSION RESULTS**



### 3.0 **Emission Results**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

where            FS = Field Strength in dB $\mu$ V/m  
                    RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
                    CF = Cable Attenuation Factor in dB  
                    AF = Antenna Factor in dB  
                    AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where            FS = Field Strength in dB $\mu$ V/m  
                    RR = RA - AG in dB $\mu$ V  
                    LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB $\mu$ V/m	
AF = 7.4 dB	RR = 23.0 dB $\mu$ V
CF = 1.6 dB	LF = 9.0 dB
AG = 29.0 dB	
FS = RR + LF	
FS = 23 + 9 = 32 dB $\mu$ V/m	

Level in  $\mu$ V/m = Common Antilogarithm [(32 dB $\mu$ V/m)/20] = 39.8  $\mu$ V/m



### 3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission  
at  
308.765 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.doc.



### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 9.0 dB

#### ***TEST PERSONNEL:***

Harry Wu, Engineer  
*Typed/Printed Name*

December 09, 2014  
Date



Applicant: Cybionics Limited  
Model: A30-XX  
Test Mode: Receive

Date of Test: December 09, 2014

**Table 1**

**FCC Class B Radiated Emissions**

Polarization	Frequency (MHz)	Reading (dBμV)	Pre- Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
H	299.996	37.2	20.0	14.9	32.1	46.0	-13.9
H	622.623	35.5	20.0	17.2	32.7	46.0	-13.3
H	935.755	31.0	20.0	23.2	34.2	46.0	-11.8
V	308.765	43.2	20.0	13.8	37.0	46.0	-9.0
V	467.985	38.8	20.0	16.3	35.1	46.0	-10.9
V	936.126	33.0	20.0	23.2	36.2	46.0	-9.8

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. All emissions below 1000MHz are below the QP limit.
5. No emissions significantly above equipment noise floor above 1000MHz.

Test Engineer: Harry Wu





### 3.4 Conducted Emission at Mains Terminal

#### 3.4.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

#### 3.4.2 Conducted Emissions

Worst Case Live-Conducted Configuration  
At

0.478 MHz

Judgement: Passed by 21.2 dB margin

#### ***TEST PERSONNEL:***

*Sign on file*


Harry Wu, Engineer  
*Typed/Printed Name*

December 09, 2014  
*Date*

Applicant: Cybionics Limited  
 Model: A30-XX  
 Sample: 1/1  
 Worst Case Operating Mode: Receive

Date of Test: December 09, 2014

## Conducted Emission Test - FCC

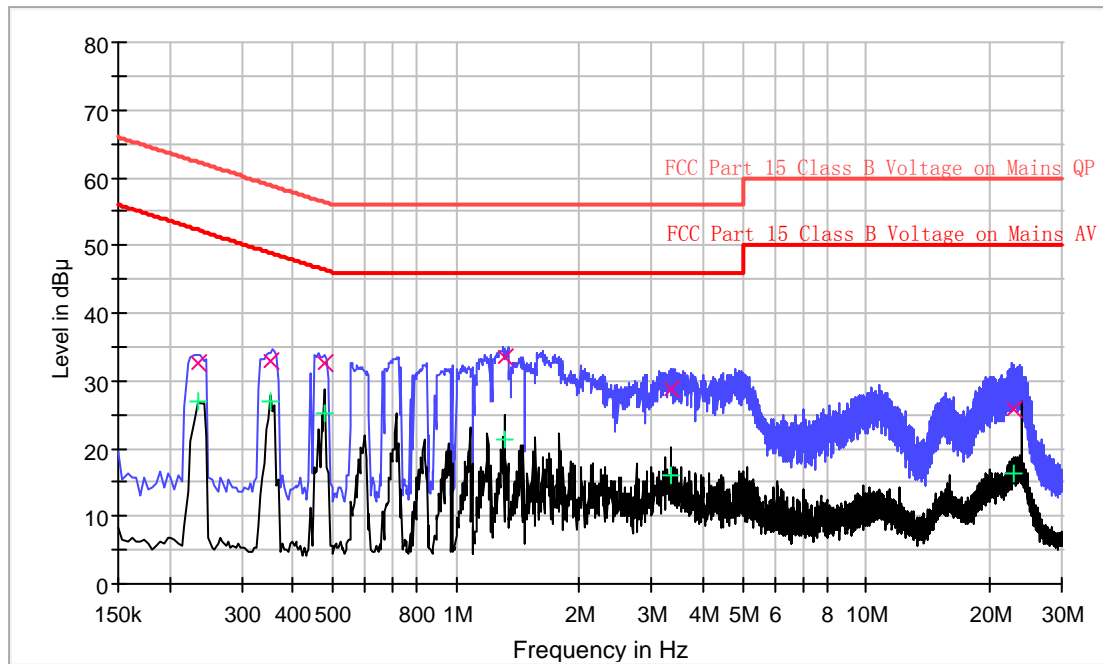

### Result Table QP

Frequency (MHz)	QuasiPeak (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.234000	32.6	L1	9.7	29.7	62.3
0.354000	33.0	L1	9.7	25.9	58.9
0.478000	32.6	L1	9.7	23.8	56.4
1.314000	33.4	L1	9.8	22.6	56.0
3.346000	28.7	L1	9.8	27.3	56.0
22.874000	25.7	L1	10.3	34.3	60.0


### Result Table AV

Frequency (MHz)	Average (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.234000	27.0	L1	9.7	25.3	52.3
0.354000	27.1	L1	9.7	21.8	48.9
0.478000	25.2	L1	9.7	21.2	46.4
1.314000	21.4	L1	9.8	24.6	46.0
3.346000	15.9	L1	9.8	30.1	46.0
22.874000	16.3	L1	10.3	33.7	50.0

Applicant: Cybionics Limited  
 Model: A30-XX  
 Sample: 1/1  
 Worst Case Operating Mode: Receive

Date of Test: December 09, 2014

## Conducted Emission Test - FCC

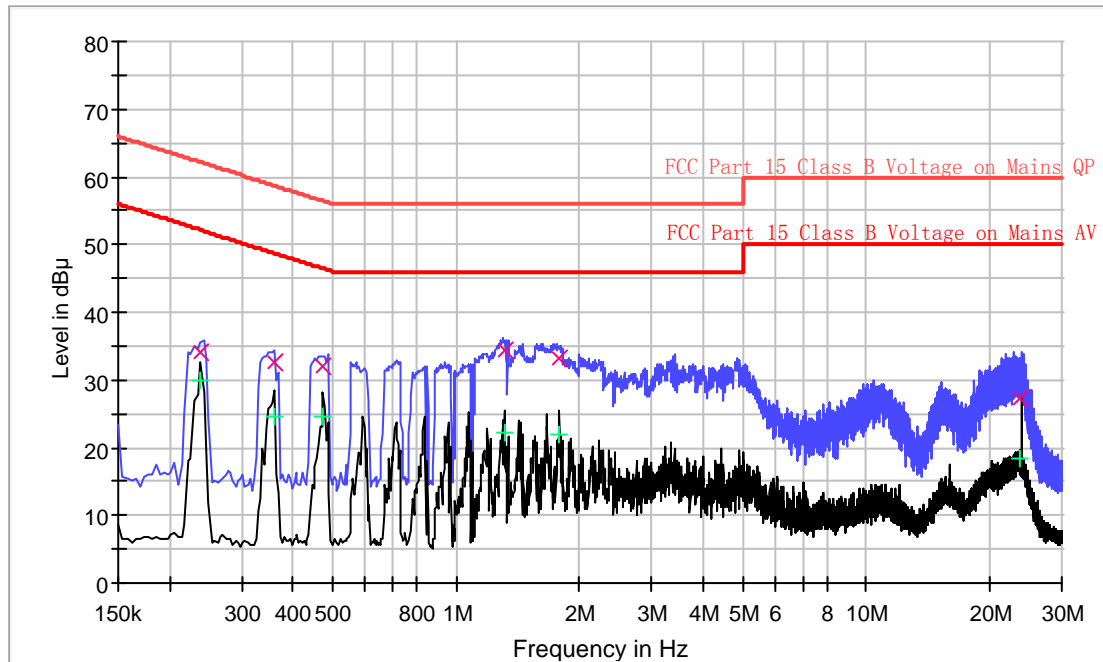

### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.238000	34.2	N	10.2	28.0	62.2
0.362000	32.6	N	10.2	26.1	58.7
0.474000	32.0	N	10.2	24.4	56.4
1.310000	34.3	N	10.3	21.7	56.0
1.790000	33.1	N	10.3	22.9	56.0
23.714000	27.2	N	10.7	32.8	60.0

### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.238000	30.1	N	10.2	22.1	52.2
0.362000	24.5	N	10.2	24.2	48.7
0.474000	24.5	N	10.2	21.9	46.4
1.310000	22.2	N	10.3	23.8	46.0
1.790000	21.8	N	10.3	24.2	46.0
23.714000	18.5	N	10.7	31.5	50.0



**EXHIBIT 4**

**EQUIPMENT PHOTOGRAPHS**



#### 4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.doc and internal photos.doc.



**EXHIBIT 5**

**PRODUCT LABELLING**



## 5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.



**EXHIBIT 6**

**TECHNICAL SPECIFICATIONS**





## 6.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.



**EXHIBIT 7**

**INSTRUCTION MANUAL**



## 7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.



**EXHIBIT 8**  
**MISCELLANEOUS INFORMATION**

## 8.0 **Miscellaneous Information**

This miscellaneous information includes emission measuring procedure.

### 8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of Receiver operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2009.

The Receiver equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions above 1GHz is in peak mode and Quasi-Peak mode is used below 1GHz.

For radiated emission, the frequency range scanned is 30MHz to 5GHz.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.



## 8.1 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 - 2009.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Measurements are normally conducted at a measurement distance of three meters. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.



**EXHIBIT 9**

**CONFIDENTIALITY REQUEST**



## 9.0 **Confidentiality Request**

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.





**EXHIBIT 10**  
**TEST EQUIPMENT LIST**

## 10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	28-Jun-14	28-Jun-15
SZ185-01	EMI Receiver	R&S	ESCI	100547	10-Mar-14	10-Mar-15
SZ061-08	Horn Antenna	ETS	3115	00092346	19-Oct-14	19-Oct-15
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	10-Mar-14	10-Mar-15
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	10-Mar-14	10-Mar-15
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	19-Apr-14	19-Apr-15
SZ062-02	RF Cable	RADIAL	RG 213U	--	3-Jul-14	3-Jan-15
SZ062-06	RF Cable	RADIAL	0.04-26.5GHz	--	3-Jul-14	3-Jan-15
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	3-Jul-14	3-Jan-15
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	21-May-14	21-May-15
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	1-Nov-14	1-Nov-15
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	1-Nov-14	1-Nov-15
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	1-Nov-14	1-Nov-15
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-14	23-Aug-15