




Report No.: HK08100843-1
Model: 60CN57-2 (Base Unit)
Talk Mode
AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

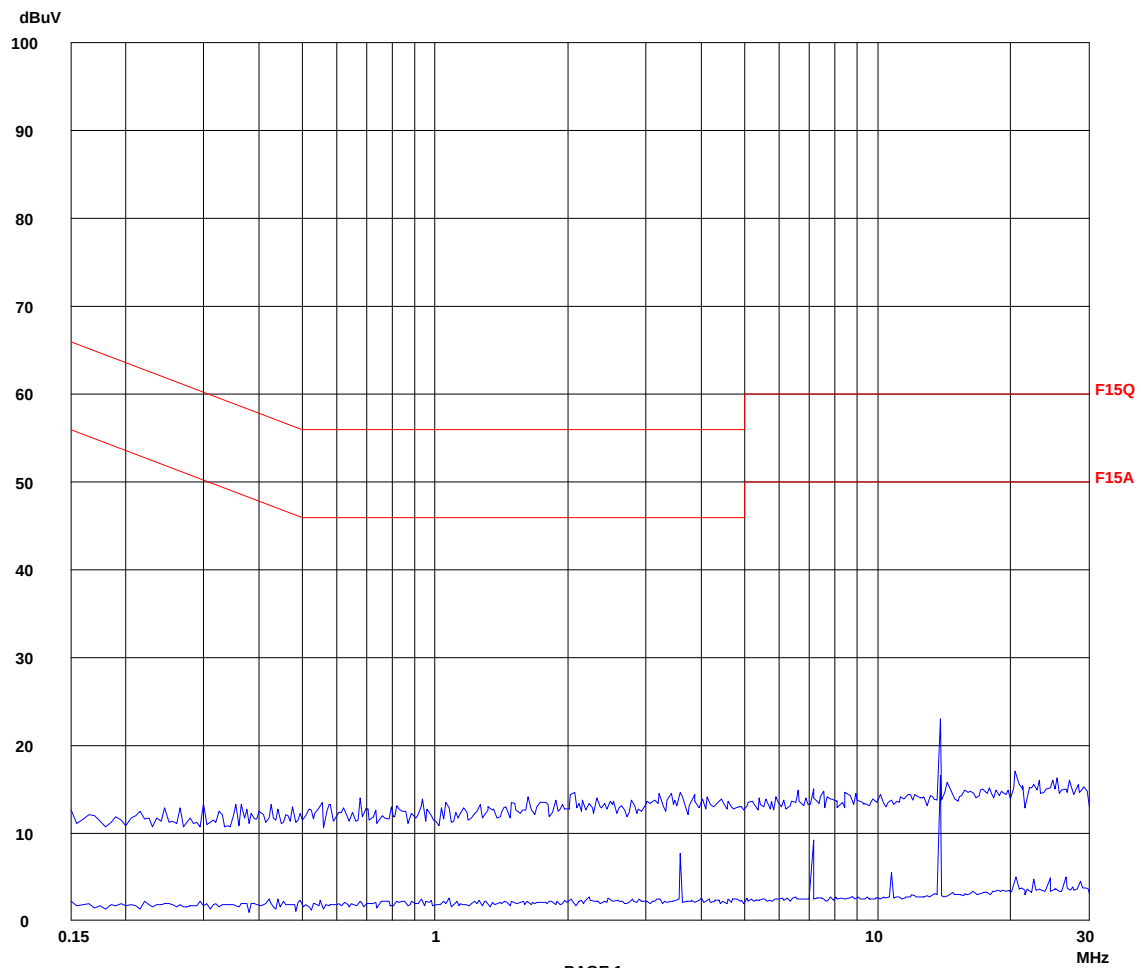



Report No.: HK08100843-1
Model: 60CN57-2 (Base Unit)
Talk Mode
AC Mains "L"

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

no Results




Report No.: HK08100843-1
Model: CY-936-2 (Base Unit)
Talk Mode
AC Mains "L"

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

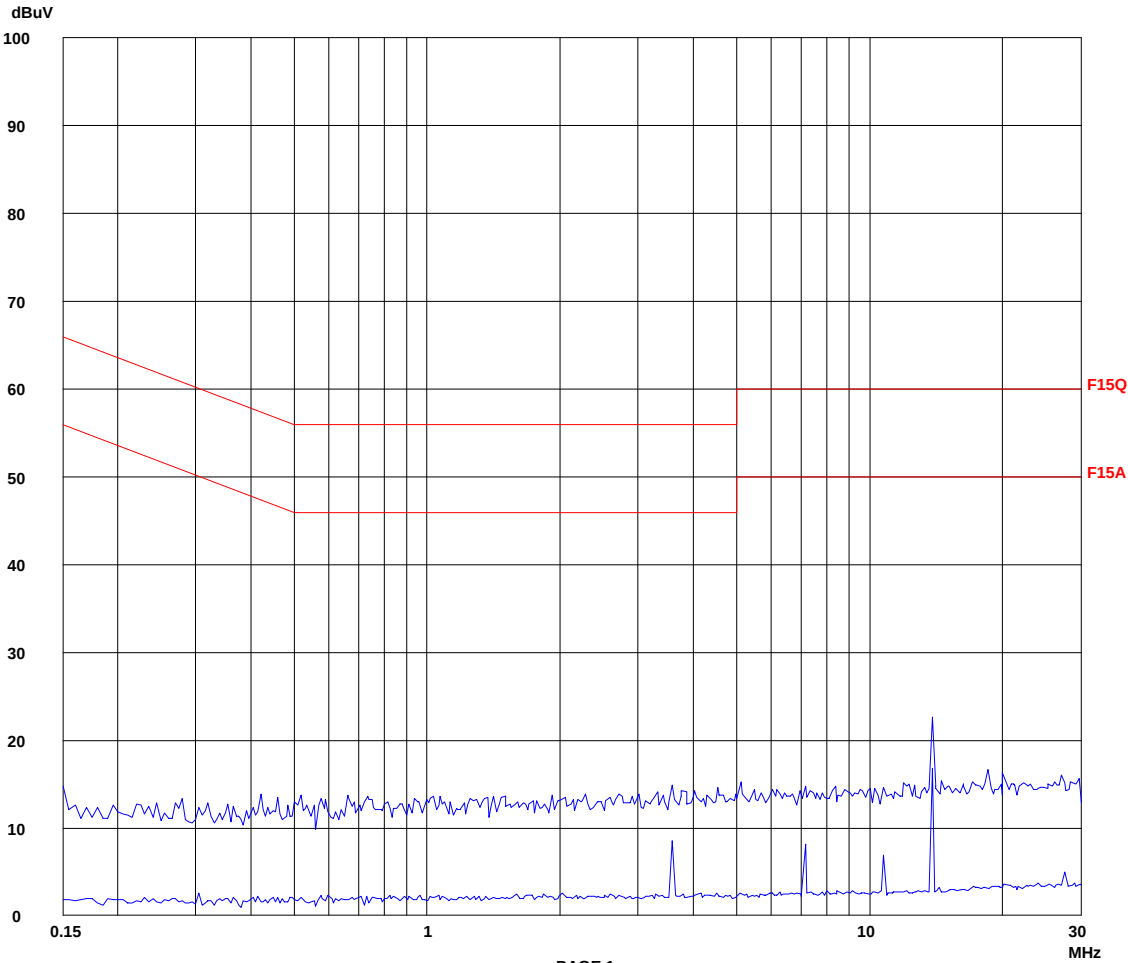



Report No.: HK08100843-1
Model: CY-936-2 (Base Unit)
Talk Mode
AC Mains "L"

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

no Results



Report No.: HK08100843-1
Ringing Mode with Charging with
60CN57-2 Base Unit
AC Mains "N"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16


Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M	EW0700
---	---	----	-----	--------

3	9k	30M	EW2454
---	----	-----	--------

12	9k	30M	EW0090
----	----	-----	--------

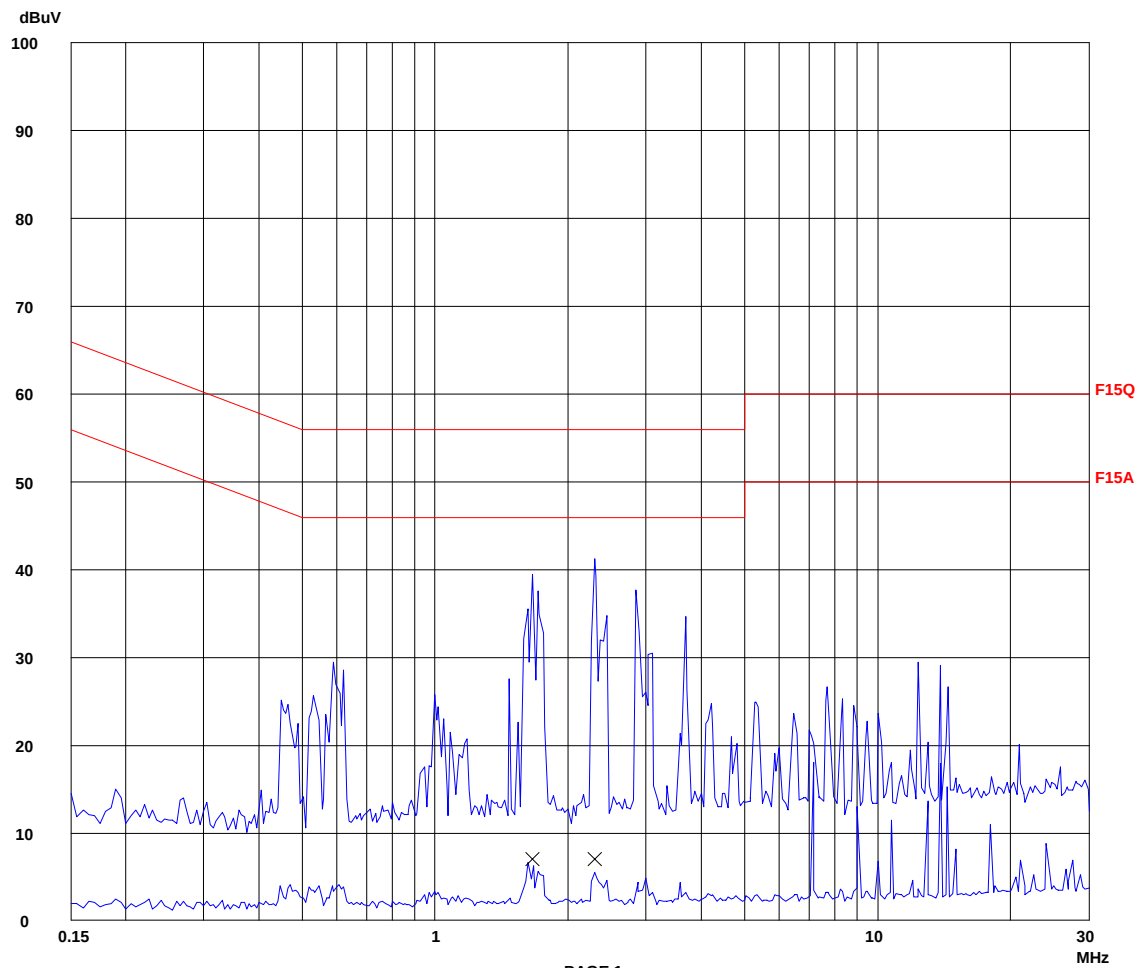

Ctrl No.: N/A



Report No.: HK08100843-1
Ringing Mode with Charging with
60CN57-2 Base Unit
AC Mains "N"

Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
1.66000	6.9	56.0	-49.1
2.29500	7.0	56.0	-49.0

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

no Results

* limit exceed